

**‘Pre-Qualification requirements (including Additional Terms and Conditions for Bidders’
PQR for Castel Lock & Key (PI 120961025)**

S No.	BHEL's requirement	Bidder's acceptance
1	Technical requirement: CASTLE LOCK (SPINDLE LENGTH 20mm) AS PER SG12640 #001	Accepted as per NIT and there is no technical deviation
2	Technical requirement: CASTLE LOCK (SPINDLE LENGTH 65mm) AS PER SG12640 #002	Accepted as per NIT and there is no technical deviation
3	Technical requirement: KEY FOR CASTLE LOCK AS PER SG12640 #003	Accepted as per NIT and there is no technical deviation
4	Technical requirement: KEY EXCHANGE BOX WITH 2 FRONT LOCKS WITH OUT KEYS & ONE CONTROL LOCK WITH KEY AS PER SG12640 #004	Accepted as per NIT and there is no technical deviation
5	Technical requirement:SOLENOID OPERATED KEY EXCHANGE BOX WITH 220/110VDC SUPPLY, 1 FRONT LOCK WITHOUT KEYS & 1 CONTROL LOCK WITH KEY AS PER SG12640 #009	Accepted as per NIT and there is no technical deviation
6	Bidder to confirm whether OEM or trader If OEM-Please submit self declaration certificate for OEM. If Trader/Reseller-Please submit valid OEM authorisation certificate.	OEM Certificate/ OEM authorised certificate

Bidders authorized seal and sign for
acceptance of above requirements



PRODUCT STANDARD

SWITCHGEAR ENGINEERING DIVISION

SG 12640 REV.04

PAGE 1 OF 5

MECHANICAL INTERLOCKS & KEY FOR INDOOR / OUTDOOR BREAKERS

1.0 **Objective:**

This specifications governs the requirements for MECHANICAL INTERLOCKS, BOLT LOCK & KEY INCLUDING KEY EXCHANGE BOX & SOLENOID OPERATED KEY EXCHANGE BOX for use in Switchgear panels (Indoor / outdoor breakers).

The basic lock consisting of a main spindle with die-cast head in a brass housing. A key with inscription corresponding to the inscription on the die-cast head of spindle can be inserted in the housing to rotate the spindle in the clockwise or anticlockwise direction thro' 45, 60, 85, 90 or 360 degree.

2.0 **Application:**

The locks can be used in different mechanical interlocking schemes to ensure a definite sequence of operation of one or more industrial or substations equipment (Power plants/Distribution).

3.0 **Technical specifications:**

S.No.	Description	BHEL Requirement	Compliance (YES/NO)
1	Material	Brass/Zinc casting	
2	Finish	Nickel plated with chrome finish Thickness of plating > 5 microns	
3	Direction of rotation (from free to trap key)	Clock-wise from the front of lock	
4	Angle of rotation of key	90 degree unless otherwise stated	
5	Dimensions	As per figures 1, 2 & 3	
6	Height/Depth of inscription letters	Minimum 3mm	
7	For one particular project :		
	i) Whether it is possible to insert keys having one inscription, on the locks having other inscription	No	
	ii) Whether keys of the same inscription are common for loose locks & locks fitted on key exchange box.	Yes	
8	All the locks & key pertaining to one particular board will be packed together in one single packet	Yes	
9	All the packets pertaining to one project will be kept together to form one package	Yes	
Note: Supplier shall give unembossed locks, keys & key exchange boxes in absence of above inscription details from BHEL. However, items shall be taken back by supplier as and when these details are furnished and supply embossed items within 10 days of issue. This activity will be coordinated by planning.			

COPYRIGHT AND CONFIDENTIAL

The information on this document is the property of Bharat Heavy Electricals Limited
It must not be used directly or indirectly in any way detrimental to interest of Co.

REV.	04	PRINTS TO:-	APPROVED –		
ALTD.	RR	Issued Online	D.K.DIKSHIT		
APPD.	MHN		PREPARED	ISSUED	DATE
DATE.	25-01-20		MANISHA HADA	A.P.SINGH	26.12.06

4.0 ITEM DETAILS


Table-1

Item No.	Item Description & drawing reference	Application	Stock Code	Supplier confirmation
001	Castle Lock (spindle length 20mm) - Fig.1	Indoor / Outdoor	BP9049113010	
002	Castle Lock (spindle length 65mm) - Fig.3	Indoor - Rear covers	BP9099136927	
003	Key for above locks - Fig.1	Indoor / Outdoor	BP9049113028	
004	Key exchange box with 2 front locks without keys & one control lock with key-Fig.2	Indoor / Outdoor	BP9049113044	
005	Key exchange box with 3 front locks without keys & one control lock with key	Indoor / Outdoor	BP9049113052	
006	Key exchange box with 4 front locks without keys & one control lock with key	Indoor / Outdoor	BP9049113060	
007	Key exchange box with 5 front locks without keys & one control lock with key	Indoor / Outdoor	BP9049121969	
008	Key exchange box with 6 front locks without keys & one control lock with key	Indoor / Outdoor	BP9049121977	
009	Solenoid operated Key exchange box with 220/110VDC supply, 1 front lock & one control lock with key	Indoor	BP9099136935	

ITEM 007

5.0 Operation of Key exchange box :

- 1 no. Solenoid operated Key Exchange box to be provided in as per Fig below:

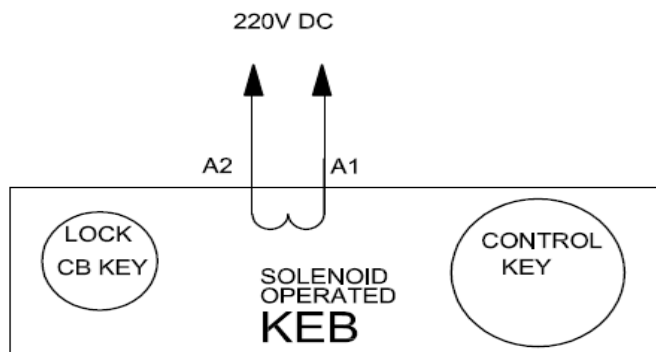

- 2) Solenoid operated KEB (Key Exchange Box) will be provided with One control Key, one LOCK for CB (Circuit Breaker) Key and provision for 240 AC supply to operate solenoid. Control Key can only be taken out from KEB when two conditions-A & Condition-B are met simultaneously. Condition-A: CB Key in inserted and Condition-B 240V DC supply is extended to KEB. The condition is detailed below:

S.No.	CB Lock (Key from breaker truck)	PT Supply	Control Key
1	Not inserted	Not available	Trapped
2	Not inserted	Available	Trapped
3	Inserted	Available	Released
4	Inserted	Not Available	Trapped



PRODUCT STANDARD

SWITCHGEAR ENGINEERING DIVISION

SG 12640 REV.04

PAGE 3 OF 5

- 3) Once control key is released reverse process needs to be followed, Circuit breaker key should be released once control key is inserted. The condition is detailed below:

S.No.	Control Key	PT Supply	CB Lock (Key from breaker truck)
1	Not inserted	Not available	Trapped
2	Not inserted	Available	Trapped
3	Inserted	Available	Released
4	Inserted	Not Available	Released

6.0 Packing:

All items shall be properly packed to avoid any damage during transport and handling. All package shall be marked with following information:

Project Name :
W.O. No. :
Itemwise quantity :
Batch/Lot No. :
Manufacturer's Name and TYPE :
Month and Year of Manufacture :


7.0 Acceptance norms:

All the items are to be accepted based on the following:


- Verification of inscription marked on the MECHANICAL INTERLOCKS, KEYS & KEY EXCHANGE BOXES with inscription furnished by BHEL.
- Smooth & Free movement in operation.
- Visual inspection for defect free surface & smooth finish.
- Key exchange box & their labels.
- Dimensional checks as per figures 1, 2, 3 & 4 / approved drawings.

Note:

1. Inscription detail locks, keys & key exchange boxes shall be provided by BHEL after PO placement based on customer approval.
2. Supplier to supply material within 45 days of providing inscription to vendors.
3. All items to be procured from single source on package wise L1 basis.

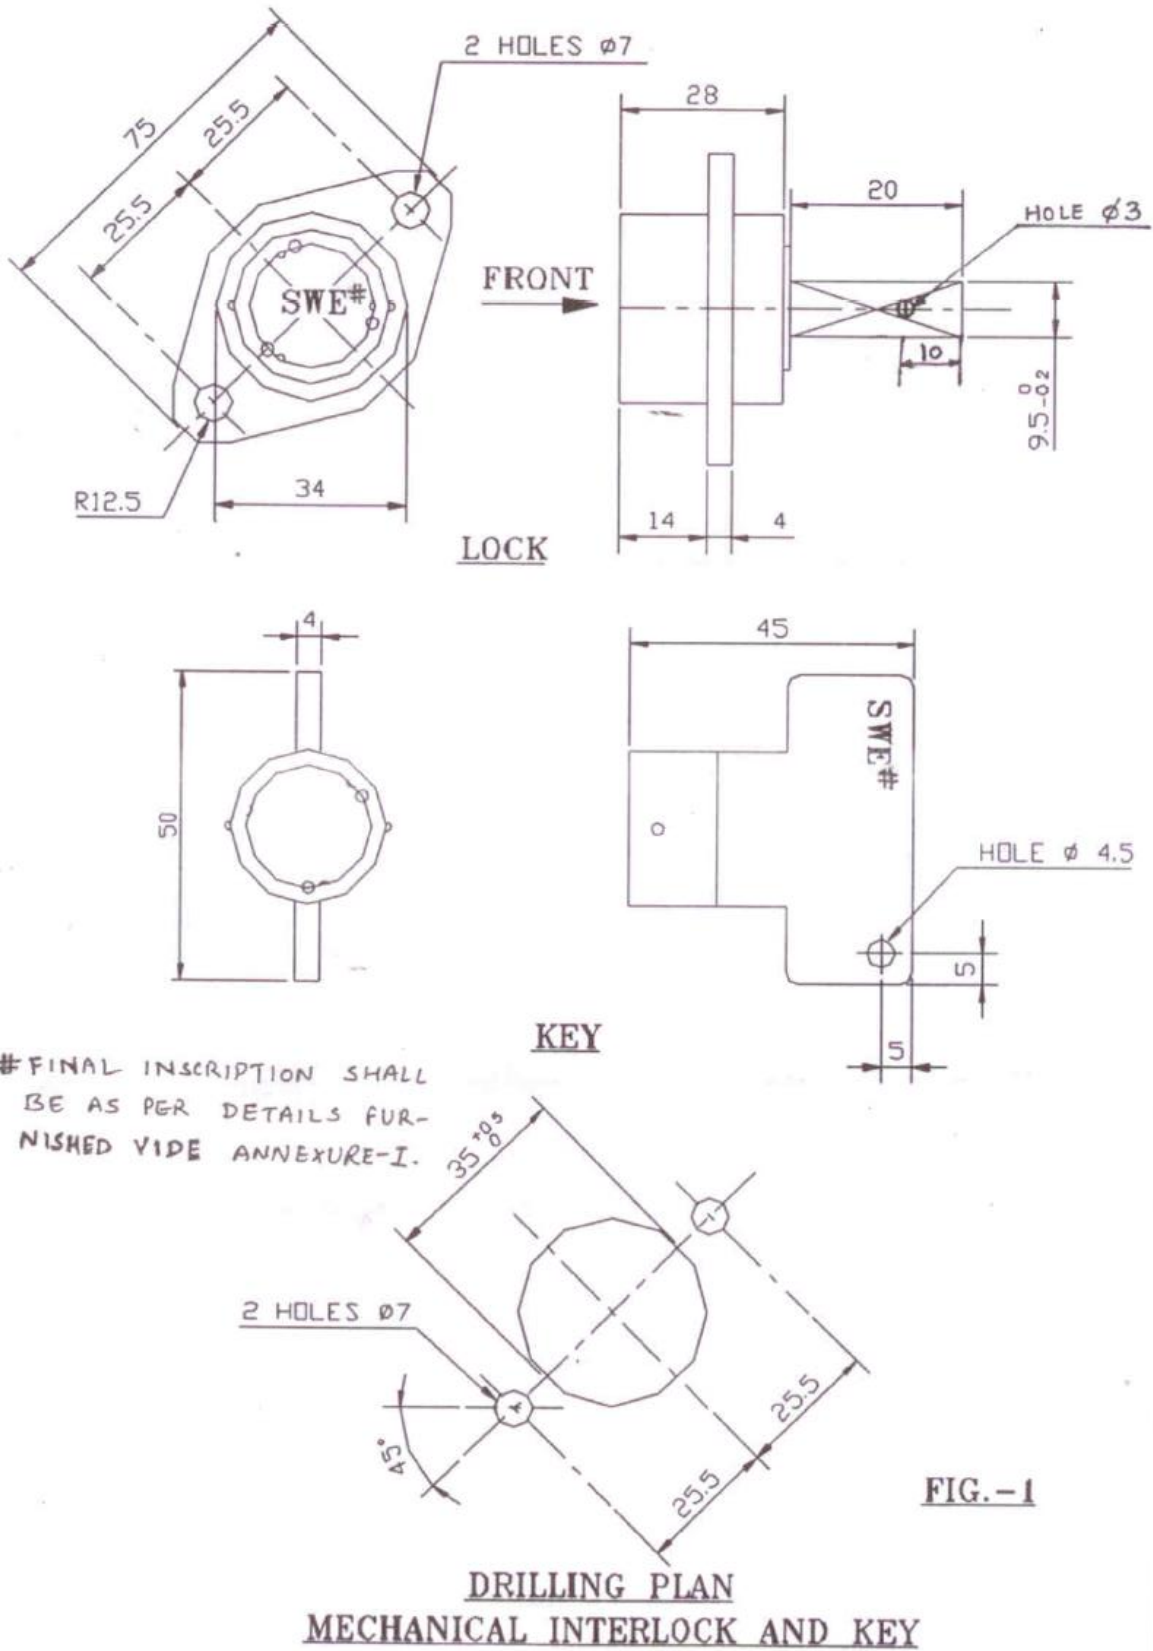

KEY EXCHANGE BOX ONE END LOCK WITH KEY & TWO FRONT LOCKS WITHOUT KEYS

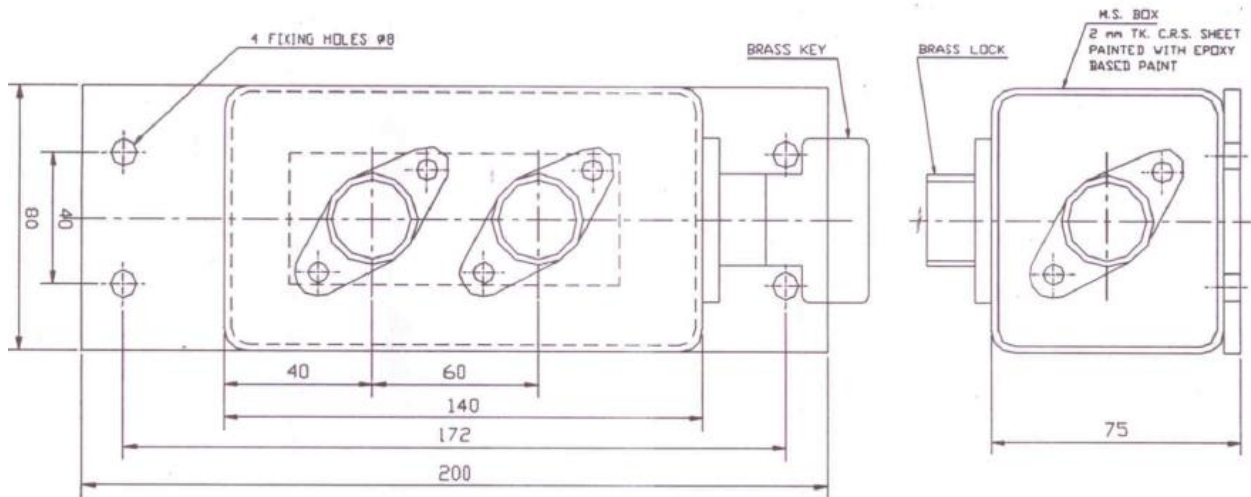

THE LOCKS:-

THE LOCKS ARE MOUNTED IN A SINGLE ROW ON THE FRONT OF THE HOUSING WITH THE CONTROL LOCK ON THE RIGHT HAND SIDE. THE MECHANISM INSIDE THE BOX ENSURES THAT:

1. THE CONTROL LOCK KEY IS TRAPPED WHEN ALL OR ANY OF THE FRONT KEYS ARE REMOVED.
2. WHEN THE CONTROL KEY IS REMOVED ALL THE FRONT KEYS ARE TRAPPED WITHIN THEIR LOCKS

FOR DIMENSIONS OF LOCK & KEY REF. FIG. 1

NOTES:-

1. GENERAL FABRICATION TOLERANCE ± 2 mm.
2. FIXING HOLES CENTRE TO CENTRE DISTANCE TOLERANCE ± 1 mm.
3. THE VIEW SHOWN ABOVE IS WITH TWO NOS. FRONT LOCK IN CASE MORE THAN TWO NOS. LOCKS ARE REQD. THE SAME SHALL BE MOUNTED AT A CENTRE DISTANCE OF 60 mm.

FIG.-2

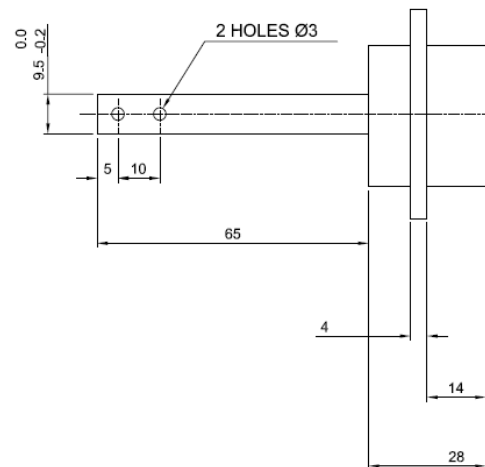
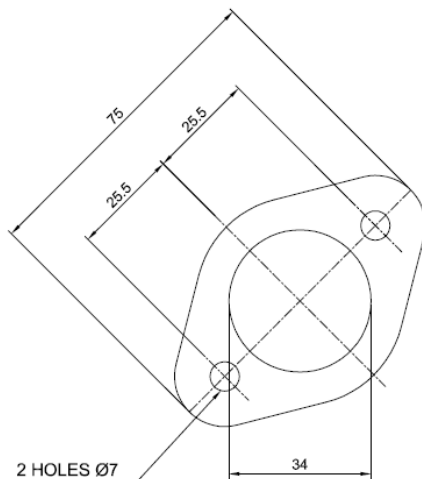


Figure-3