


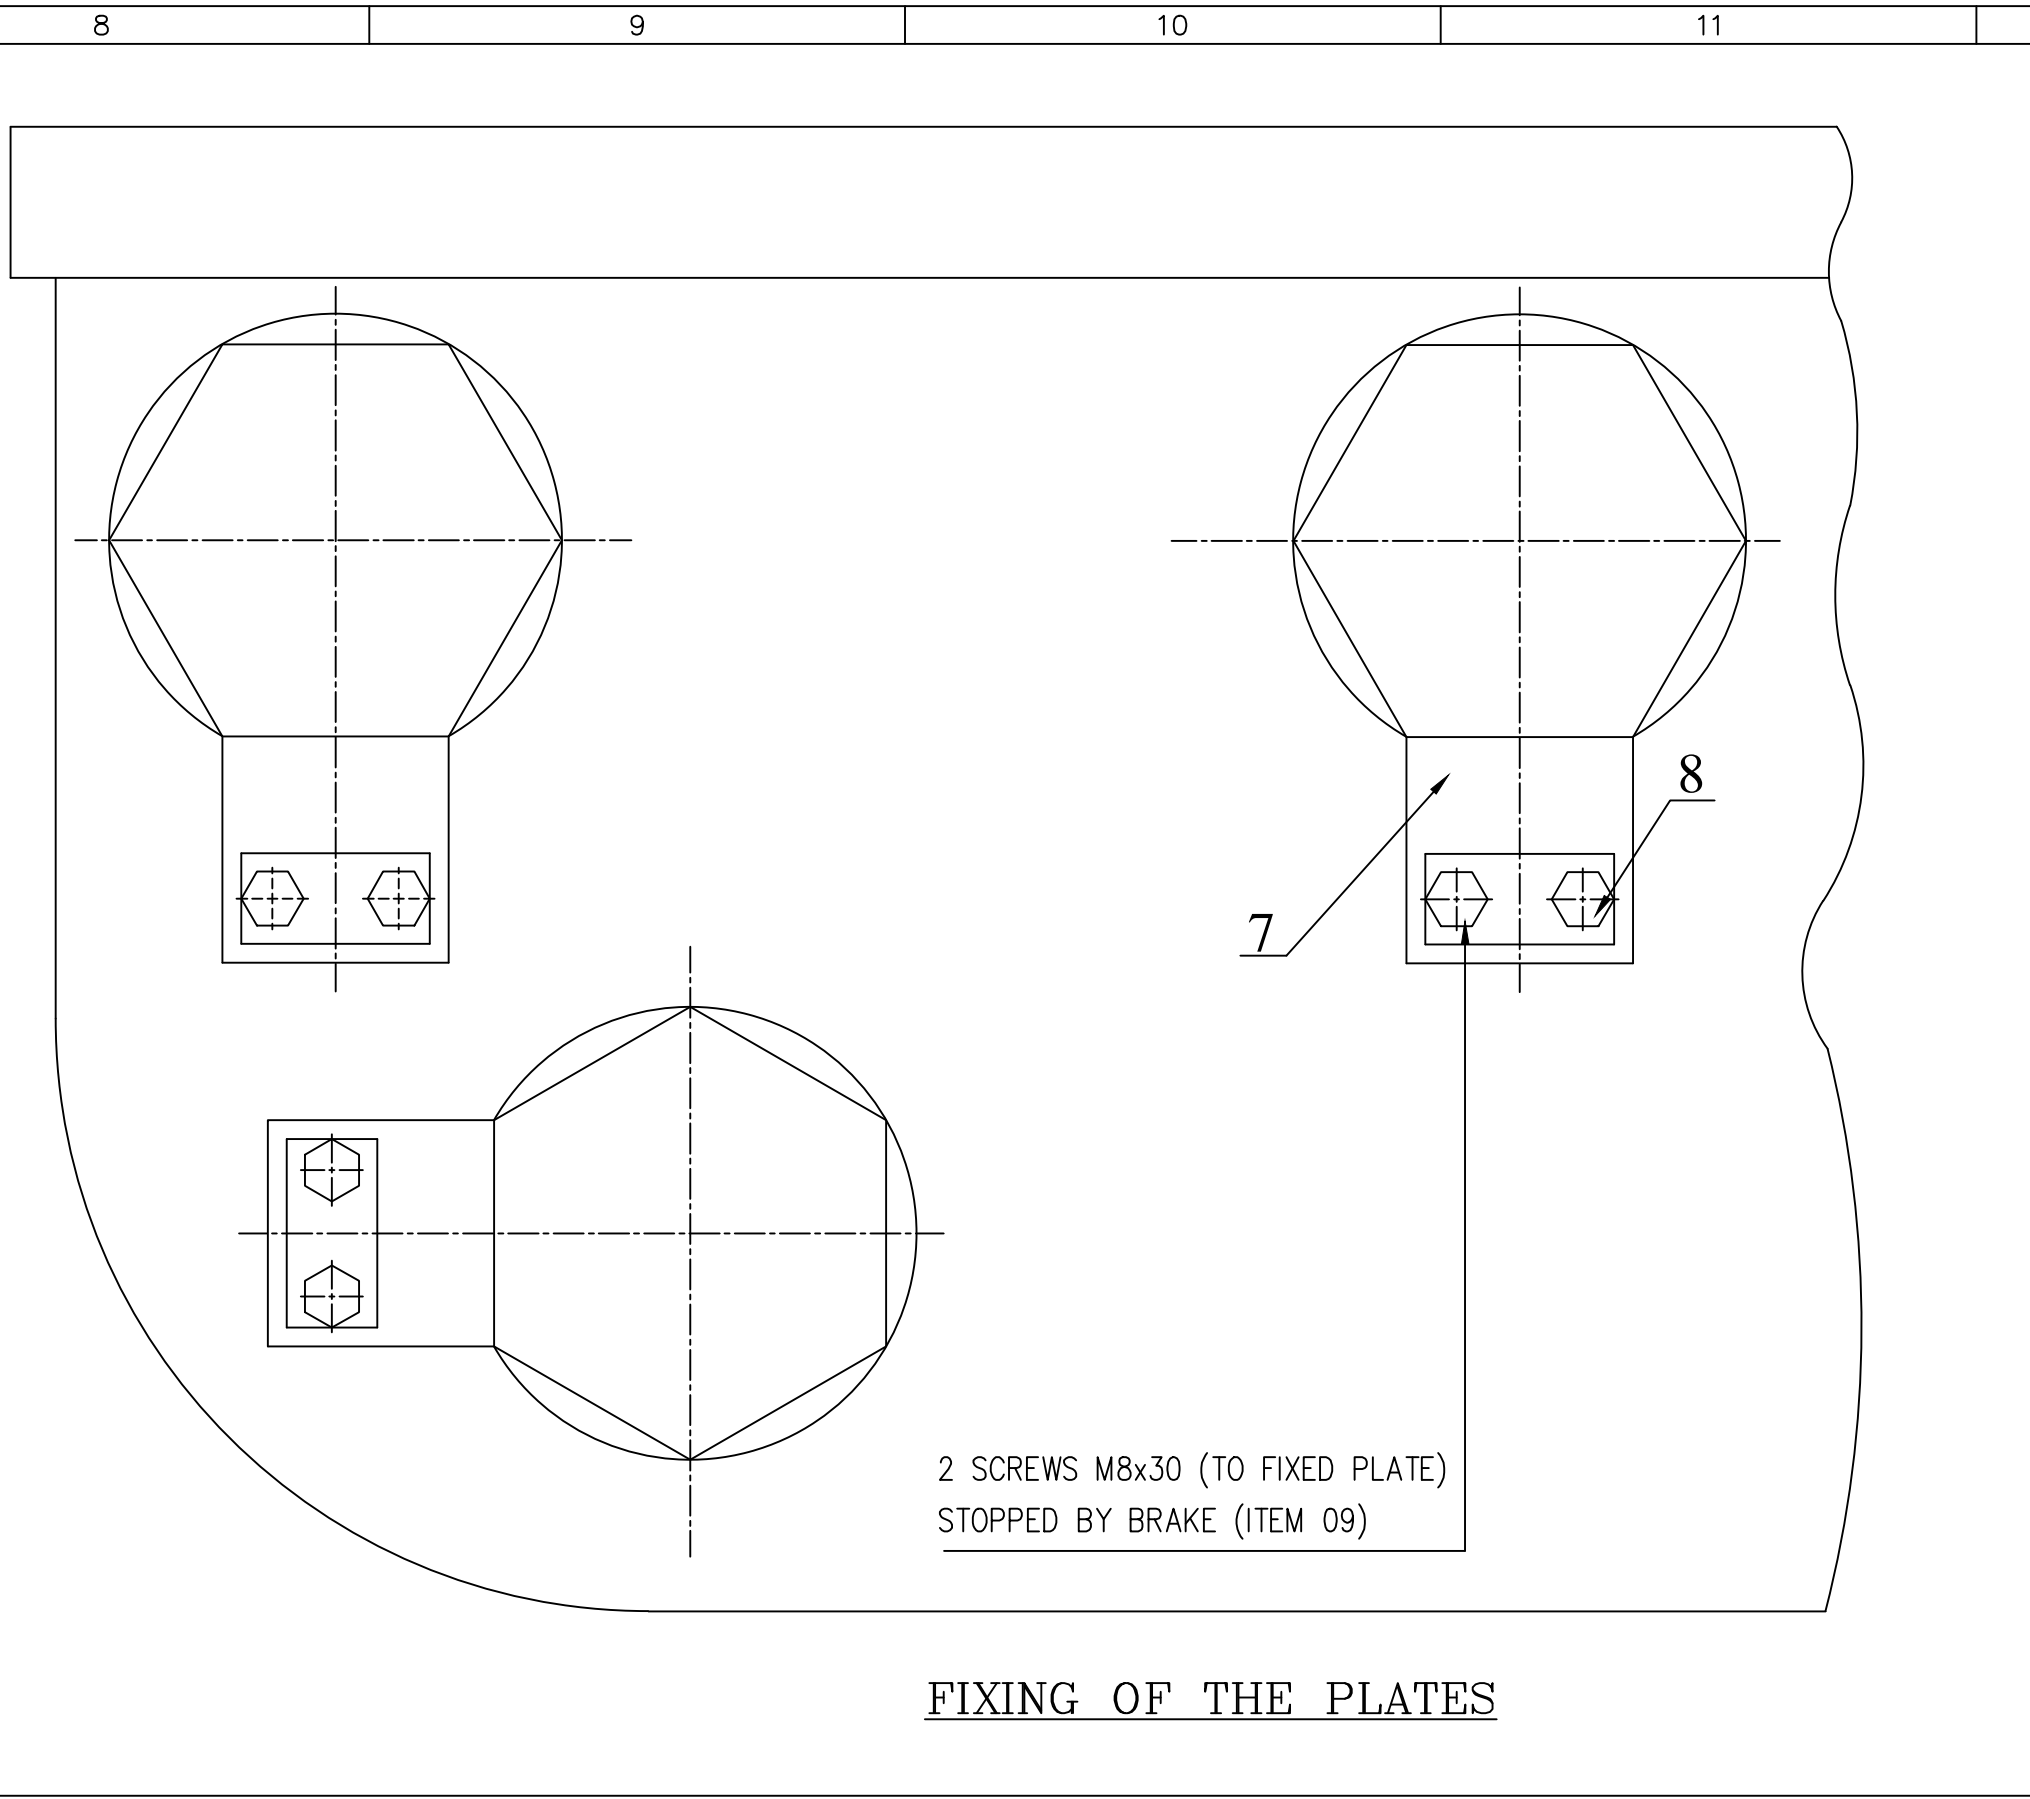

1. GIRTH GEAR TWO HALF SHALL BE MATCH MARKED WITH SERIAL NO. ALONG WITH THE DUMB BELL TO ENSURE THEIR MATCHING AT SITE.

FIXING OF THE PLATES

TOTAL BACKLASH IN MOUNTING 2.66 TO 3.14mm

DRIVE CAPACITY: 1710 KW, 1000 RPM

GEAR SPEED: 15.62 RPM

V. REMOVE THIS SCREW AFTER MOUNTING OF GEAR.

TITLE	DRAWING NO.	REV.
GIRTH GEAR - $\phi 5.6M$	0-62-221-00003	00
	SHEET NO. 02	NO OF SHEETS 02

[illegible]