


Check valve Damper

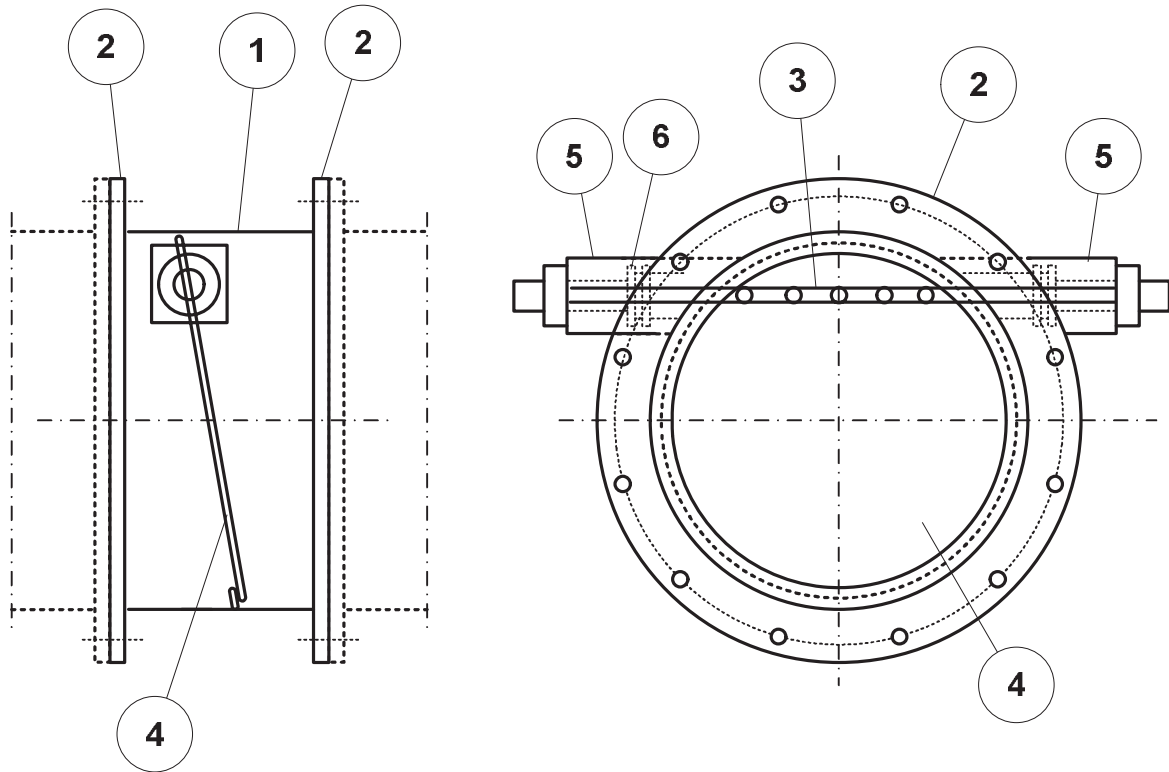

Applicable for Duct Class	Max. Design Pressure (Bar g)	Max. Design Temp. (deg.C)	Details			
			Pos. No.	Description	Dimensions	Material
K22A	0.3	300	1	Casing	Acc. to manufacturer	Acc. to Duct Class
K24A	0.3	450	2	Flange	Acc to Section 4	Acc. to Duct Class
K34D	0.2	500	3	Shaft	Acc. to manufacturer	SS 316 Ti, 1)
K42N	0.2	300	4	Blade	Acc. to manufacturer	SS 304, 1)
K50K	0.2	550	5	Stuffing box with sealing air, 2)	Acc. to manufacturer	SS 316 Ti, 1)
K60K	0.2	650	6	Bearing	Acc. to manufacturer	Acc. to manufacturer

Notes:

- 1) Details by manufacturer.
- 2) Optional - sealing air not required for air service.
- 3) Counter weights design by manufacturer to adjust the operating forces.