



BHARAT HEAVY ELECTRICALS LIMITED
TRANSMISSION BUSINESS ENGINEERING MANAGEMENT
NEW DELHI

DOCUMENT No.	TB-385-316-137	Rev	00	NAME	JK	SK	AS
CUSTOMER Doc. No.				SIGN	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
TYPE OF DOC.	TECHNICAL SPECIFICATION			DATE	26/10/16	26/10/16	26/10/16
TITLE 765KV COMPOSITE LONG ROD POLYMER INSULATORS STRING AND HARDWARE FITTING				GROUP	TBEM		
				W.O. No			

CUSTOMER	POWER GRID CORPORATION OF INDIA LIMITED
PROJECT	Substation Package -SS01 for Construction of 765/400/220kV Bhuj Pool (New) S/S and Extension of 765kV Banaskantha S/S under Green Energy Corridors: Inter-State Transmission Scheme (ISTS) – Part C.
NOA Ref:	

<u>List of Contents</u>	<u>No. of Pages</u>
Cover Sheet	01
Section 1 Scope & Quantities	06
Section 2 Standard Specification (Specific Technical Requirements)	12
Annexure –B	04
Section 3 Project Details and General Specification	
TB-385-316-S03 Rev-01	27
Section 4 Check list	01
<u>Enclosures:</u>	
Annexure – A (Schedule of technical deviation)	01

Rev.	Date	Altered	Checked	Approved	First Issue		
					REVISION DETAILS		
Distribution				CUSTOMER	TBMM	O/C	
				-	1	1	

SECTION - 1**1.1 SCOPE-**

This technical specification covers the requirements of design, manufacture, testing at works, packing and dispatch of 765kV composite long rod polymer insulators string and hardware fitting to site.

The specification comprise of following sections:

Section-1: Scope, Specific Technical Requirements & Bill of Quantities

Section-2: Detailed Technical Requirement - Equipment Specification

Section-3: Project Details & General Technical Requirements

Section-4: Checklist

In case of any conflict between various sections, order of precedence shall be in the same order as listed above and the same is to be considered as binding requirement.

This section covers the scope and quantities of 765kV composite long rod polymer insulators string and hardware fitting. The Specific Technical Requirements for the above item as specified by the customer (PGCIL) are given in Section-2. The offered equipment shall also comply with the General Technical Requirements for the project as detailed under section-3 of this specification.

The equipment is required for the following project:

Customer: Power Grid Corporation of India Ltd.

Project: Substation Package -SS01 for Construction of 765/400/220kV **Bhuj** Pool (New) S/S and Extension of 765kV **Banaskantha** S/S under Green Energy Corridors: Inter-State Transmission Scheme (ISTS) – Part C.

1.2 SPECIFIC TECHNICAL REQUIREMENTS-

All equipments shall perform satisfactorily under various other electrical, electromechanical and meteorological conditions of the site of installation.

All equipment shall be able to withstand all external and internal mechanical, thermal and electromechanical forces due to various factors like wind load, temperature variation, ice & snow, (wherever applicable) etc for the equipment.

Equipment's and system shall be designed to meet the following major technical parameters as brought out hereunder.

SN	Parameters	765kV
1.	Max. System Voltage (kV)	800kV
2.	Lightning Impulse withstand voltage of string with corona control rings (dry) (kVp)	± 2100
3.	Switching surge withstand voltage of string with corona control ring (wet) (kVp)	± 1550

4.	Power frequency withstand voltage of the complete string with corona control rings (wet (kVrms)	870
5.	Minimum total creepage distance of the insulator string (mm)	24800 mm (31mm/kV)
6.	Max. Radio Interference voltage in micro volts of string with corona control rings across 300 Ohms resistor at 1 Mhz	1000(Max.) at 508kV
7.	Minimum Corona Extinction Voltage level of string with corona control rings (dry (kV rms)	508
8.	Ball and sockets designation of the Insulator string in mm	24
9.	Hot dip galvanizing	As per IS 2633/2629
10.	Electro mechanical strength of composite long rod insulator unit in (kN)	210

1.3 BILL OF QUANTITIES –

Sl. No	Description	Unit	BHUJ SS QTY	BANAS-KANTHA SS Qty	Total
1.	765kV, 210kN Composite long Rod polymer type insulator with creepage distance of 31mm/kV	Nos.	328	220	548
2.	765 kV hardware assembly complete in all respect for V type suspension string arrangement (anchor spacing of 3000mm) with through type suspension clamp suitable for Quad AAC Bull Conductor (sub conductor spacing 450mm). Suitable for 210kN Composite long Rod polymer type insulator.	Sets	27	18	45
3.	765 kV hardware assembly complete in all respect for V type suspension string arrangement (anchor spacing of 3000mm) with drop type suspension clamp suitable for Quad AAC Bull Conductor (sub conductor spacing 450mm). Suitable for 210kN Composite long Rod polymer type insulator.	Sets	24	18	42
4.	765 kV hardware assembly complete in all respect for through type double tension string arrangement with turn buckle (anchor spacing of	Sets	51	30	81

	450mm) suitable for Quad AAC Bull Conductor (sub conductor spacing 450mm). Suitable for 210kN Composite long Rod polymer type insulator.				
5.	765 kV hardware assembly complete in all respect for through type double tension string arrangement without turn buckle (anchor spacing of 450mm) suitable for Quad AAC Bull Conductor (sub conductor spacing 450mm). Suitable for 210kN Composite long Rod polymer type insulator.	Sets	51	30	81
6.	765 kV hardware assembly complete in all respect for through type double tension string arrangement with turn buckle (anchor spacing of 450mm) suitable for Quad HEX ZEBRA Conductor (sub conductor spacing 457mm). Suitable for 210kN Composite long Rod polymer type insulator.	Sets	6	6	12
7.	765 kV hardware assembly for Guy Wire arrangement complete in all respect with double tension type and turn buckle suitable for quad AAC Bull conductor (sub conductor spacing 450mm) on one end and 2 set of 2X10.98mm shield wire (450mm spacing) on other end and all other applicable accessories as mentioned in note no. 2. Suitable for 2 nos. 210kN Composite long Rod polymer type insulator.	Sets	5	8	13

NOTE:

- 1) Total quantity may vary upto $\pm 25\%$. However, individual project wise quantities may vary upto $\pm 30\%$.
- 2) Supply of all the hardware are deemed to be included including corona rings.
- 3) Hardware for guy wire arrangement-All applicable accessories like foundation anchor bolt, nut, washer, BOW, anchor plate etc. for guy wire arrangement as per annexure-B(attached for reference only) shall be in bidder scope . For Guy wire arrangement BHEL will supply only 10.98 mm dia. Shield wire, Bull AAC conductor, tension clamps for shield wire and PG clamps for shield wire. Civil work for foundation of guy wire shall be in BHEL scope.

1.4 TYPE TESTING-

Bidder shall submit valid type test reports (as per relevant IEC/IS Standard) for approval. The type test reports submitted shall be of tests conducted within last 10

years prior to the date of bid opening i.e. dated **07.04.2015**. The bidder should have conducted type test on identical or similar equipment/ components to those offered. In case type test reports are found to be technically unacceptable to BHEL/PGCIL, the type test shall be conducted without cost and delivery implication to BHEL.

1.5 QUALITY PLAN-

Bidder to follow valid PGCIL approved Quality Plan as per PGCIL procedure. In case the bidder don't have valid PGCIL approved QP, it will be the bidder's responsibility to get its QP approved directly from the ultimate customer.



1.6 QUALIFYING REQUIREMENTS OF COMPOSITE LONG ROD POLYMER INSULATOR STRING (765kV) -

The manufacturer whose composite long rod insulator strings are offered should have been manufacturing composite long rod insulator for the last five years as on the originally scheduled date of bid opening. The manufacturer(s) should have also designed , manufactured , tested and supplied composite long rod insulator strings of 120kN or above electro mechanical strength for specified voltage or above and the same should have been in operation as on the originally scheduled date of bid opening.


Further, the manufacturer should also have successfully completed the following tests on the insulator units and insulator strings (of composite long rod insulators) as on the originally scheduled date of bid opening:

- i) Tests on individual units as per IEC 61109
- ii) Following type tests on insulator strings assembly for the specified voltage or above class transmission lines/substations with 120kN or above electromechanical strength insulators:
 - power frequency voltage withstand test (wet)
 - Switching Surge voltage withstand test (wet)
 - Lightning Impulse voltage withstand test (dry)
 - Radio interference voltage test (dry)
- iii) Accelerated ageing test of 5000 hours as described in appendix-C of IEC 61109 or test at multiples stresses of 5000 hours as described in Annex-B of IEC-62217.


Note: Originally scheduled date of bid opening is **dated 07.04.2015**.

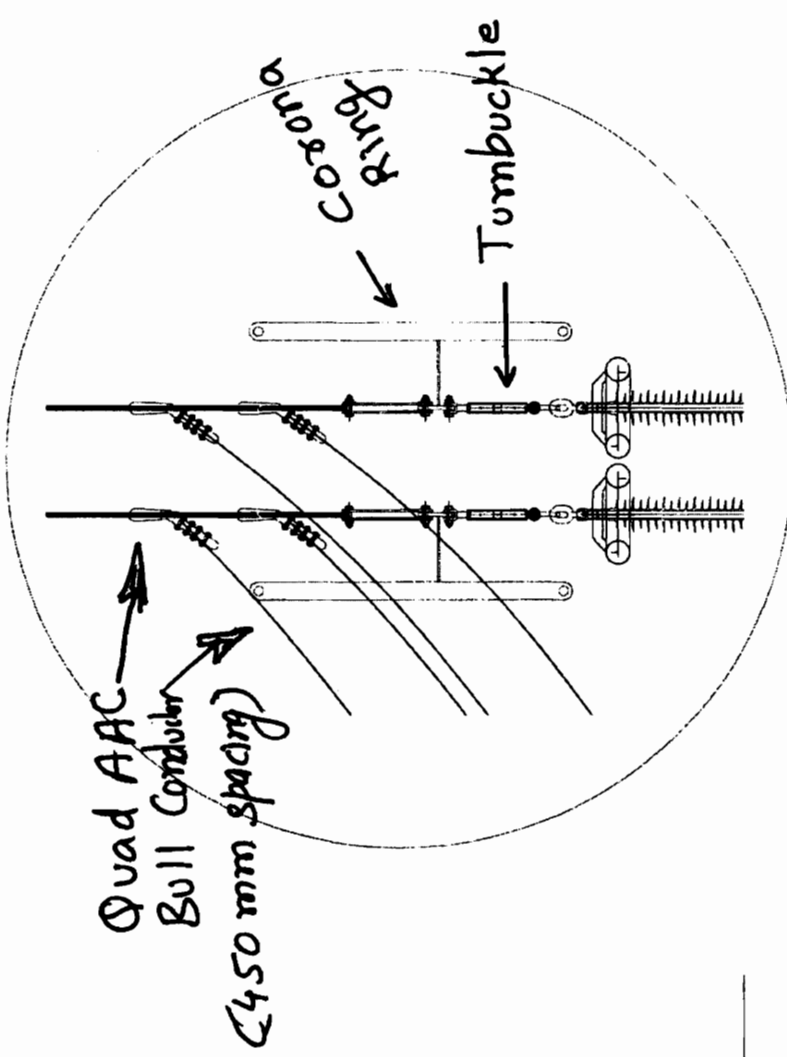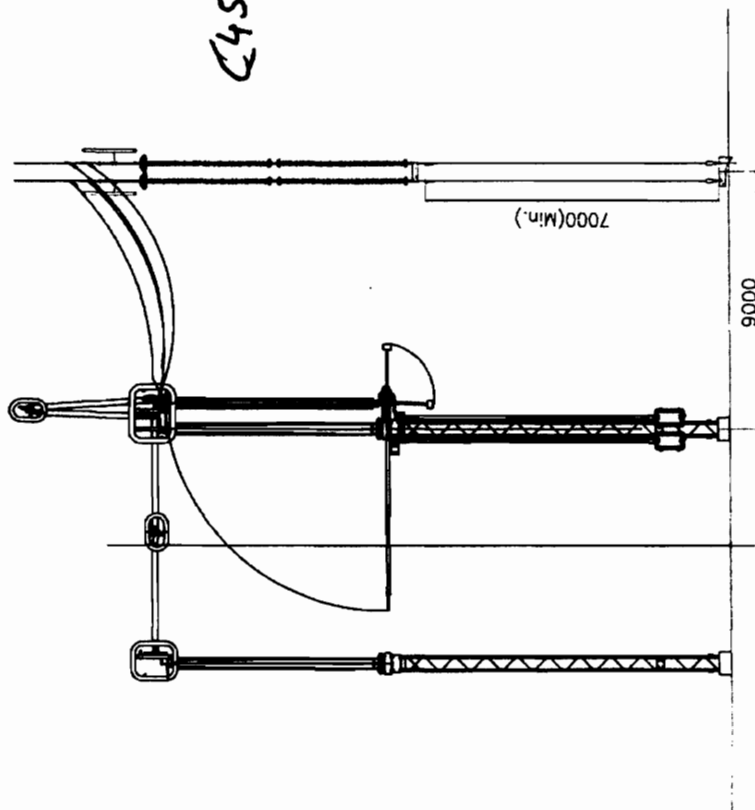

CONNECTION ARRANGEMENT



FOUNDATION DETAILS

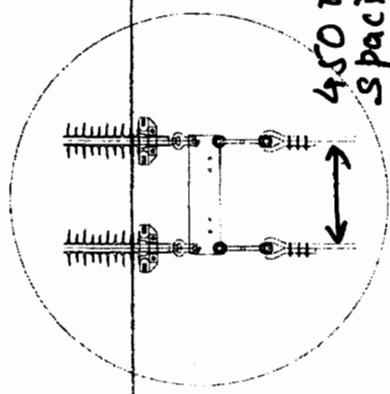

ANCHORING DETAILS

POWER GRID CORPORATION OF INDIA LIMITED (A Government of India Enterprise)		Drawing No.: C/ENG/STD/GUY ARR		Rev 00
PROJECT :- STANDARD		Oct-2013	Date	
TITLE:- GUY ARRANGEMENT (765kV)		CKD	PRPD	SHEET 2 of 2

APPD	REVIEWED	CKD	PRPD	Date	Rev 00
------	----------	-----	------	------	--------

2.0 String Insulators & Hardware

The insulators for suspension and tension strings shall conform to IEC-60383 and long rod insulators shall conform to IEC-60433. Insulator hardware shall conform to IS:2486. Composite long rod **polymer** insulator shall conform to IEC:61109. **Further, contractor shall supply insulators as per details mentioned below:**

765 kV & 400 kV System	220 kV & 132kV System
Porcelain/Glass/ Composite Long Rod Polymer	Porcelain/Glass/composite Long Rod Polymer/Porcelain long Rod

2.1 Construction Features (Porcelain & Glass Insulators)

2.1.1 Porcelain insulators

- Suspension and tension insulators shall be wet process porcelain with ball and socket connection. Insulators shall be interchangeable and shall be suitable for forming either suspension or tension strings. Each insulator shall have rated strength **manufacturer's logo, month & year of manufacturing** markings on porcelain printed and applied before firing.
- Porcelain used in insulator manufacture shall be homogeneous, free from laminations, cavities and other flaws or imperfections that might affect the mechanical or dielectric quality and shall be thoroughly vitrified, tough and

SECTION - (SE) **SWITCHYARD ERECTION**

impervious to moisture.

- c) Glazing of the porcelain shall be uniform brown colour, free from blisters, burrs and other similar defects.

2.1.2 Glass insulators (upto 765kV voltage level)

It **shall** be made of toughened glass. Glass used for the shells shall be sound, free from defects, flows bubbles, inclusions, etc and be of uniform toughness over its entire surface. All exposed glass surfaces shall be smooth.

- 2.1.2.1 When operating at normal rated voltage, there shall be no electric discharge between conductor and insulator which would cause corrosion or **damage** to conductors or insulators by the formation of substances due to chemical action. No radio interference shall be caused when operating at normal rated voltage.

- 2.1.2.2 The design of the insulator shall be such that stresses due to expansion and contraction in any part of the insulator shall not lead to deterioration. All ferrous parts shall be hot dip galvanized in accordance with the latest edition of IS: 2629. The zinc used for galvanizing shall be of grade Zn-99.95 as per IS-209. The zinc coating shall be uniform, adherent, smooth, reasonably bright, continuous and free from imperfections such as flux, ash, rust stains bulky white deposits and blisters.

- 2.1.2.3 Contractor shall make available data on all the essential features of design including the method of assembly of discs and metal parts, number of discs per insulator string, the manner in which mechanical stresses are transmitted through discs to adjacent parts, provision for meeting expansion stresses, results of corona and thermal shock tests, recommended working strength and any special design or arrangement employed to increase life under service conditions.

- 2.1.2.4 Clamps for insulator strings and Corona Control rings shall be of aluminium alloy as stipulated for clamps and connectors.

- 2.1.2.5 Insulator hardware shall be of forged steel. Malleable cast iron shall not be accepted except for insulator disc cap. The surface of hardware must be clean, smooth, without cuts, abrasion or projections. No part shall be subjected to excessive localized pressure. The metal parts shall not produce any noise generating corona under operating conditions.

- 2.1.2.6 The tension Insulator hardware assembly shall be designed for minimum 21000 kg tensile load for 765kV and minimum 12000 kg tensile load for **hardware assembly** below 765kV. Earth wire tension clamp shall be designed for minimum 1000 kg tensile load with a factor of safety of two (2).

- 2.1.2.7 The tension string assemblies shall be supplied alongwith suitable turn buckle. Sag compensation springs if required may also be provided.

- 2.1.2.8 All hardware shall be bolted type.

2.1.3 Long Rod Porcelain Insulators (up to 220kV Voltage level)

- 2.1.3.1 As an alternative to disc insulator, Bidder can offer long rod porcelain insulators strings, with suitable hardware. The combination should be suitable for

SECTION - (SE) **SWITCHYARD ERECTION**

application specified and should offer the identical/equivalent parameters as would be available from insulator string comprising disc insulators and hardware combination.

- 2.1.3.2 All constructional features specified at Clause 2.1.1 of this Section shall also apply to the long rod insulator string.

2.2 Tests

In accordance with the stipulations of the specification, the suspension and tension strings, insulator and hardware shall be subjected to the following type tests, acceptance tests and routine tests:

- 2.2.1 **Type Tests on Insulator Strings:** The test reports for following type tests shall be submitted for approval as per clause 9.0 of Section - GTR.

- a) Power frequency voltage withstand test with corona control rings (if applicable) under wet condition as per IEC- 60383.
- b) Switching surge voltage withstand test [400 kV and above class only] under wet condition as per IEC-60383.
- c) Lightning Impulse voltage withstand test with corona control rings under dry condition as per IEC-60383
- d) Voltage distribution test (Dry) [applicable for disc insulator string only]

The voltage across each insulator unit shall be measured by sphere gap method. The result obtained shall be converted into percentage. The voltage across any disc shall not exceed 6.5% for 765 kV suspension and tension insulator strings, 9% and 10% for 400KV suspension string and tension insulator string respectively, 13% for 220KV suspension and tension insulator strings, 20% and 22% for 132KV suspension and tension insulator strings respectively.

- e) Corona Extinction Voltage test (Dry) [132kV and above class only]

The sample assembly when subjected to power frequency voltage shall have a corona extinction voltage **as specified at clause 2.3.2**. There shall be no evidence of Corona on any part of the sample. The atmospheric condition during testing shall be recorded and the test results shall be accordingly corrected with suitable correction factor as stipulated in IEC 60383.

- f) RIV Test (Dry) [132 kV and above class only]

Under the conditions as specified under (e) above the insulator string alongwith complete hardware fittings shall have a radio interference voltage as **specified in clause 2.3.2 of this section**. The test procedure shall be in accordance with IS 8263/IEC 60437.

- g) Mechanical strength test: The test shall be carried out as per following procedure.

The complete insulator string alongwith its hardware fitting excluding

SECTION - (SE) **SWITCHYARD ERECTION**

arcing horn, corona control ring, grading ring, tension/suspension clamps shall be subjected to a load equal to 50% of the specified minimum ultimate tensile strength (UTS) which shall be increased at a steady rate to 67% of the minimum UTS specified. The load shall be held for five minutes and then removed. After removal of the load, the string components shall not show any visual deformation and it shall be possible to dismantle them by hand. Hand tools may be used to remove cotter pins and loosen the nuts initially. The string shall then be reassembled and loaded to 50% of UTS and the load shall be further increased at a steady rate till the specified minimum UTS and held for one minute. No fracture should occur during this period. The applied load shall then be increased until the failing load is reached and the value recorded.

2.2.2 Type Tests on Insulators

Type test report for Thermal Mechanical Performance tests (**applicable for porcelain type insulators**) as per IEC - 60575, Clause 3 shall be submitted for approval as per clause 9.2 of Section - GTR.

2.2.3 Acceptance Tests for Insulators:

- a) Visual examination as per IEC-60383/ IEC-61109 clause no. 7.2 (for composite long rod insulators).
- b) Verification of Dimensions as per IEC- 60383.
- c) Temperature cycle test as per IEC- 60383.
- d) Puncture Test as per IEC-60383 (Applicable only for porcelain insulators).
- e) Galvanizing Test as per IEC- 60383.
- f) Mechanical performance test as per IEC-60575 Cl. 4 / IEC-61109 clause no. 7.2 (for composite long rod insulators).
- g) Test on locking device for ball and socket coupling as per IEC-60372(2).
- h) Porosity test as per IEC- 60383 (Applicable only for porcelain insulators).
- i) Thermal shock test as per IEC-60383 (Applicable only for glass insulators)

2.2.4 Acceptance Test on Hardware Fitting

- a) Visual Examination as per Cl. 5.10 of IS: 2486 (Part-I).
- b) Verification of Dimensions as per Cl. 5.8 of IS:2486 (Part-I)
- c) Galvanising/Electroplating tests as per Cl. 5.9 of IS:2486 (Part-I).
- d) Slip strength test as per Cl 5.4 of IS-2486 (part-I)
- e) Shore hardness test by the Elastometer (if applicable as per the value

SECTION - (SE)
SWITCHYARD ERECTION

guaranteed by the Bidder).

- f) Mechanical strength test for each component (including corona control rings and arcing horns).

The load shall be so applied that the component is stressed in the same way as it would be in actual service and the procedure as given in 2.2.1.(g) above should be followed.

- g) Test on locking devices for ball and socket coupling as per IEC -60372(2).

2.2.5 Routine Test on Insulator

- a) Visual Inspection as per IEC-60383
b) Mechanical Routine Test as per IEC-60383
c) Electrical Routine Test as per IEC-60383

2.2.6 Routine Test on hardware Fittings

- a) Visual examination as per Cl 5.10 of IS:2486 (Part-I)
b) Mechanical strength Test as per Cl. 5.11 of IS:2486 (Part-I)

2.2.7 Test during manufacture on all Components as applicable on insulator

- a) Chemical analysis of zinc used for galvanising:

Samples taken from the zinc ingot shall be chemically analyzed as per IS : 209. The purity of zinc shall not be less than 99.95%.

- b) Chemical Analysis, mechanical hardness tests and magnetic particle inspection for malleable casting:

The chemical analysis, hardness tests and magnetic particle inspection for malleable casting will be as per the internationally recognized procedures for these tests. The sampling will be based on heat number and heat treatment batch. The details regarding tests will be as discussed and mutually agreed to by the Contractor and Employer in Quality Assurance Program.

2.2.8 Test during manufacture on all components as applicable on hardware fittings:

- a) Chemical analysis of zinc used for galvanising:

Samples taken from the zinc ingot shall be chemically analyzed as per IS : 209. The purity of zinc shall not be less than 99.95%

- b) Chemical analysis, hardness tests and magnetic particle for Forgings/
fabricated hardware:

The chemical analysis, hardness tests and magnetic particle inspection

SECTION - (SE) **SWITCHYARD ERECTION**

for forgings/fabricated hardware will be as per the internationally recognized procedures for these tests. The sampling will be based on heat number and heat treatment batch. The details regarding tests will be as discussed and mutually agreed to by the Contractor and Employer in Quality Assurance Programme.

2.3 Guaranteed technical Particular For

2.3.1 Disc Insulators

Sl. No.	Description	For 765kV	For 400/220/132kV
a)	Type of insulators	Anti Fog type	Anti Fog type
b)	Size of insulator units (mm) (Dia & Height)	255x145 or 280x145	255x145 or 280x145
c)	Electro mechanical strength	210 kN	120 kN
d)	Creepage distance of individual insulator units (minimum and as required to meet total creepage distance)	460 mm	430 mm
e)	Markings		
i)	For Porcelain insulators	Markings on porcelain	Markings on porcelain
ii)	For toughened glass insulators	Markings shall be done on initial parts	Markings shall be done on initial parts
f)	Power frequency puncture withstand voltage	1.3 times the actual wet flashover voltage	1.3 times the actual wet flashover voltage

2.3.2 INSULATOR STRING

Sl. No.	Description	765 kV	400kV	220kV	132kV
a)	Power frequency withstand voltage of the complete string with corona control ring (wet) – KV rms	870	680	460	275
b)	Lightning impulse withstand Voltage of string with corona control rings (dry) - kVp	± 2100	± 1550	± 1050	± 650
c)	Switching surge withstand voltage of string with corona control rings (wet) - kVp	± 1550	± 1050	NA	NA
d)	Minimum corona extinction voltage level of string with Corona Control rings (dry) - kV rms	508	320	156	NA
e)	Maximum RIV level in micro volts of string with Corona Control rings across 300 Ohms resistor at 1 MHz	1000 (Max) at 508	1000 (Max) at 320	1000 (Max) at 156	NA

SECTION - (SE)
SWITCHYARD ERECTION

		kV	kV	kV	
f)	Minimum total creepage distance of the insulator string (mm)	20000	10500	6125	3625
g)	Total no. of discs per string	44	25	15	10
h)	Electromechanical strength of Insulator Unit. (KN)	210	120	120	120

For tension application, double insulator strings for 765kV, 400kV, 220kV and single insulator strings for 132 kV systems shall be used. For suspension purpose single suspension insulator string shall be used for 765kV, 400kV, 220kV & 132 kV systems. In case of polymer insulator, Bidder shall offer 'V' suspension strings without any extra cost implication.

2.4 COMPOSITE LONG ROD INSULATOR

As an alternative to disc insulator/long rod porcelain, Bidder can also offer composite long rod **polymer** insulators with suitable hardware.

2.4.1 Details of Composite Long Rod Insulators

2.4.2 Contractor shall offer such composite insulators which have proven use under foggy/ humid **operating** conditions in polluted industrial environment combined with smoke and dust particles.

2.4.3 Insulators shall have sheds of the "open aerodynamic profile without any under ribs" with good self-cleaning properties. Insulator shed profile, spacing projection etc. shall be strictly in accordance with the recommendation of IEC-60815.

2.4.4 Ball and socket shall be 20mm designation for 120kN & 24mm designation for 210kN Insulators in accordance with the standard dimensions stated in IEC:60120/ IS:2486 (Part-II). Insulators shall be interchangeable and shall be suitable for forming either suspension or tension strings. Each insulator shall have **laser markings on housings for manufacturer's name, month & year of manufacturing**, rated strength markings on each composite insulator rod unit. **No** negative tolerance shall be applicable to creepage distance of composite insulators

2.4.5 All ferrous parts shall be hot dip galvanized as per Section-GTR with minimum weight of zinc coating as 610 gm/sq.m.

2.4.6 Materials

2.4.6.1 Core

It shall be a glass-fiber reinforced (FRP) epoxy resin rod of high strength. The rod shall be resistant to hydrolysis. The rod shall be electrical grade corrosion resistant (ECR), boron free glass and shall exhibit both high electrical integrity and high resistance to acid corrosion.

2.4.6.2 Housing & Weathersheds

The FRP rod shall be covered by a sheath of a silicone rubber compound of a

SECTION - (SE)

SWITCHYARD ERECTION

thickness of minimum 5mm. The housing & weathersheds should have silicon content of minimum 30% by weight. It should protect the FRP rod against environmental influences, external pollution and humidity. It shall be extruded or directly molded on the core. The interface between the housing and the core must be uniform and without voids. The strength of the bond shall be greater than the tearing strength of the polymer. The manufacturer shall follow non-destructive technique (N.D.T.) to check the quality of jointing of the housing interface with the core.

The weathersheds of the insulators shall be of alternate shed profile. The weathersheds shall be vulcanized to the sheath (extrusion process) or molded as part of the sheath (injection moulding process) and free from imperfections. The vulcanization for extrusion process shall be at high temperature and for injection moulding shall be at high temperature & high pressure. Any seams/ burrs protruding axially along the insulator, resulting from the injection moulding process shall be removed completely without causing any damage to the housing. The track resistance of housing and shed material shall be class 1A4.5 according to IEC60587. The strength of the weathershed to sheath interface shall be greater than the tearing strength of the polymer. The composite insulator shall be capable of high pressure washing.

2.4.6.3 End Fittings

End fittings transmit the mechanical load to the core. They shall be made of malleable cast iron/ spheroidal graphite or forged steel. They shall be connected to the rod by means of a controlled compression technique. The manufacturer shall have in-process Acoustic emission arrangement or some other arrangement to ensure that there is no damage to the core during crimping. This verification shall be in-process and done on each insulator. The system of attachment of end fitting to the rod shall provide superior sealing performance between housing and metal connection. The gap between fitting and sheath shall be sealed by a flexible silicone rubber compound. The sealing shall stick to both housing and metal end fitting. The sealing must be humidity proof and durable with time.

End fittings shall have suitable provisions for fixing grading rings at the correct position as per design requirements.

2.4.6.4 Grading Rings

Grading rings shall be used at both ends of each composite insulator unit for reducing the voltage gradient on and within the insulator and to reduce TV noise to acceptable levels. The size and placement of the metallic grading rings shall be designed to eliminate dry band arcing/corona cutting/ exceeding of permissible electrical stress of material. The insulator supplier shall furnish design calculations using appropriate electric field software showing electric field at surface of housing, inside housing & core and at the interface of housing and metal fittings with the proposed placement and design of corona rings. Grading rings shall be capable of installation and removal with hot line tools without disassembling any other part of the insulator assembly.

The design & supply of grading rings shall be in the scope of the composite insulator supplier.

SECTION - (SE) **SWITCHYARD ERECTION**

2.4.7 Tests and Standards

2.4.7.1 Type Tests

The test reports for following type tests on long rod units, components, materials or complete strings shall be submitted for approval as per clause 9.2 of Section - ~~09E~~ **3**

2.4.7.1.1 On the complete composite Long Rod Insulator String with Hardware Fittings:-

- a) Power frequency voltage withstand test with corona control rings/grading ring and arcing horns (if provided) under wet condition as per IEC:60383-1993/
- b) Switching surge voltage withstand test under wet condition as per IEC:60383-1993.
- c) Impulse voltage withstand test under dry condition as per IEC:60383-1993
- d) Corona and RIV test under dry condition. [132kV and above class only]

The sample assembly when subjected to power frequency voltage shall have a corona extinction **voltage as specified in clause 2.3.2 of this section**. There shall be no evidence of Corona on any part of the sample. The atmospheric condition during testing shall be recorded and the test results shall be accordingly corrected with suitable correction factor as stipulated in IEC 60383.

Under the conditions as specified above the insulator string alongwith complete hardware fittings shall have a radio interference voltage level **as specified at specified in clause 2.3.2 of this section**. The test procedure shall be in accordance with IS 8263/IEC 60437.

- e) Mechanical Strength test: The test shall be carried out as per following procedure.

The complete insulator string alongwith its hardware fitting excluding arcing horn, corona control ring, grading ring, tension/suspension clamps shall be subjected to a load equal to 50% of the specified minimum ultimate tensile strength (UTS) which shall be increased at a steady rate to 67% of the minimum UTS specified. The load shall be held for five minutes and then removed. After removal of the load, the string components shall not show any visual deformation and it shall be possible to dismantle them by hand. Hand tools may be used to remove cotter pins and loosen the nuts initially. The string shall then be reassembled and loaded to 50% of UTS and the load shall be further increased at a steady rate till the specified minimum UTS and held for one minute. No fracture should occur during this period. The applied load shall then be increased until the failing load is reached and the value recorded.

- f) Salt-fog pollution withstand test as per IEC: 60507. The salinity level for composite long rod insulators shall be 160 Kg/m³ NaCl.

SECTION - (SE)
SWITCHYARD ERECTION

2.4.7.1.2 On Composite Insulator Units

- a) Tests on interfaces and connections of metal fittings as per IEC: 61109-2008.
- b) Assembled core load time test as per IEC: 61109-2008.
- c) Damage limit proof test and test of tightness of interface between end firings and insulator housing as per IEC: 61109-2008
- d) High Pressure washing test

The washing of a complete insulator of each E&M rating is to be carried out at 3800 kPa with nozzles of 6 mm diameter at a distance of 3m from nozzles to the insulator, the washing shall be carried out for 10minutes. There shall be no damage to the sheath or metal fitting to housing interface. The verification shall be **done by** 1 minute wet power frequency withstand test at 680kV r.m.s for 400KV.

- e) Brittle fracture resistance test

The test arrangement shall be according to Damage limit proof test with simultaneous application of 1N-HNO₃ acid directly in contact with naked FRP rod. The contact length of acid shall not be less than 40mm and thickness around the core not less than 10mm. The rod shall withstand 80% of SML for 96 hours.

- f) Dye penetration test as per IEC: 61109-2008
- g) Water diffusion test as per IEC: 61109-2008
- h) Tracking and erosion test as per IEC: 61109-2008.
- i) Hardness test as per IEC: 61109-2008.
- j) Accelerated weathering test as per IEC: 61109-2008.
- k) Flammability test as per IEC: 61109-2008.
- l) Silicone content test

Minimum content of silicone **shall be 30% and the same** shall be verified through FT-IR spectroscopy & TGA analysis or any other approved/ **acceptable method**.

- m) Recovery of Hydrophobicity test

1. The surface of selected samples shall be cleaned with isopropyl alcohol. Allow the surface to dry and spray with water. Record the HC classification. Dry the sample surface.
2. Treat the surface with corona discharges to destroy the hydrophobicity. This can be done utilizing a high frequency corona tester, Holding the electrode approximately 3mm from the sample surface, slowly move the electrode over an area approximately 1" x 1". Continue treating this area

SECTION - (SE) **SWITCHYARD ERECTION**

for 2 – 3 minutes, operating the tester at maximum output.

3. Immediately after the corona treatment, spray the surface with water and record the HC classification. The surface should be hydrophilic, with an HC value of 6 or 7. If not, dry the surface and repeat the corona treatment for a longer time until an HC of 6 or 7 is obtained. Dry the sample surface.
4. Allow the sample to recover and repeat the hydrophobicity measurement at several time intervals. Silicone rubber should recover to HC 1 – HC 2 within 24 to 48 hours, depending on the material and the intensity of the corona treatment.

n) **Torsion test**

Three complete insulators of each **electrical and mechanical** rating shall be subjected to a torsional load of 55Nm. The torsional strength test shall be made with test specimen adequately secured to the testing machine. The torsional load shall be applied to the test specimen through a torque member so constructed that the test specimen is not subjected to any cantilever stress. The insulator after torsion test must pass the Dye Penetration Test as per IEC 61109.

- o) Accelerated ageing test of 5000hrs as described in appendix-C of IEC 61109 or Test at multiple stresses of 5000 hrs as described in Annex-B of IEC - 62217

2.4.7.2

Acceptance Tests:

For Composite Long Rod Insulators

a.	Verification of dimensions	IEC : 61109-2008
b.	Galvanizing test	IEC : 60383
c.	Verification of end fittings	IEC : 61109-2008
d.	Recovery of Hydrophobicity	As per above
e.	Verification of tightness of interface between end fittings and insulator housing and of specified mechanical load	IEC : 61109-2008
f.	Silicone content test	As per above
g.	Brittle fracture resistance test	As per above
h.	Dye penetration test	IEC : 61109-2008
i.	Water diffusion test	IEC : 61109-2008

In the event of failure of the sample to satisfy the acceptance test(s) specified in 2.4.7.2 above, the **re-test** procedure shall be as per IEC 61109.

SECTION - (SE)
SWITCHYARD ERECTION

2.4.7.3 Routine Tests

For Composite Long Rod Insulator Units


a)	Visual Examination	As per IEC:61109-2008
b)	Mechanical routine test	As per IEC:61109 -2008

2.4.8 Guaranteed Technical Particulars for Composite Long Rod Polymer Insulators

The technical parameters for composite long rod polymer insulator string shall be same of the insulator string specified in clause 2.3.2 of this section.

Annexure-B


General Notes
1. FOR DETAILS OF FOM. BOLTS REFER APPROVED STRUCTURE DRAWING.
2. IN THIS DRAWING, DEMOTES REIN. STEEL CONFORMING TO IS:1786 - 1985 OF GRADE Fe 500
3. LAP LENGTH SHALL BE 47 TIMES DIA OF BAR.
4. PROVIDE CLEAR COVER TO REIN. AS UNDER.
• 50mm FOR BOTTOM, TOP & SIDE REINFORCEMENT OF RAFT.
• 50mm FOR COLUMN.
5. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE NOTED.
6. DO NOT SCALE THE DRAWING. ONLY WRITTEN DIMENSIONS SHALL BE FOLLOWED.
7. UNLESS OTHERWISE NOTED ALL CONCRETE SHALL BE OF GRADE M-25
8. FOR ORIENTATION OF FOUNDATION REFER APPROVED FOM LAYOUT
9. FINAL EXCAVATION LEVEL SHALL BE MIN. 500mm BELOW MCL.
10. IF EXPANSIVE SOIL IS ENCOUNTERED AT FOUNDING LVL., IT SHALL BE REMOVED TO A DEPTH OF 300MM AND REPLACED WITH C&S MATERIAL OR LOCALLY AVAILABLE GOOD EARTH IN 3 EQUAL LAYERS.
11. THIS DRAWING IS APPLICABLE FOR S.B.C. OF 87/50mm OR ABOVE.
SEE DRAWING : C/DMC/STD/GUY ARR. 2 SHEETS, TILED 'GUY ARRANGEMENT 765 KV RECORD FORM ENCL. S/5 NDC NCM DTD. 12.03.16

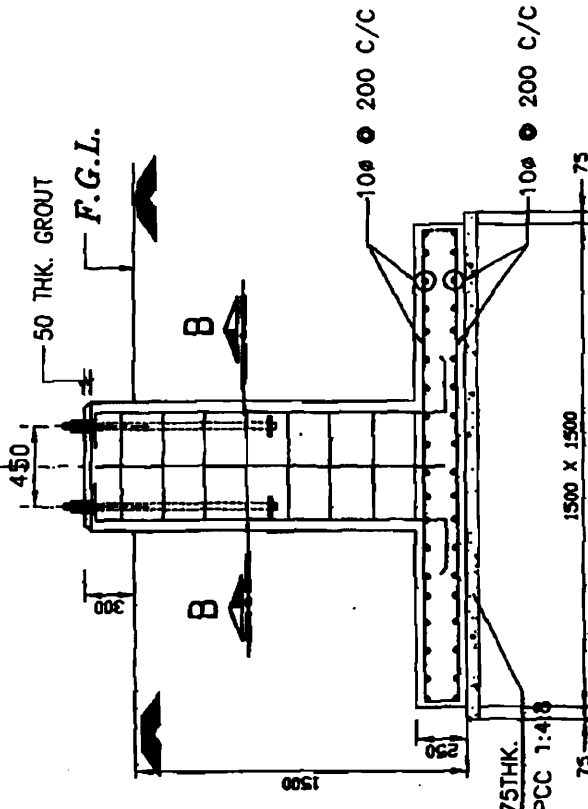


SECTION A-A

REFERENCES ONLY


- NOTE:
1. LOCATION, SIZE AND DEPTH OF EXCAVATION SHALL BE AS PER APPROVED STRUCTURE DRAWING OF GUY ARRANGEMENT BEFORE CONSTRUCTION.
 2. THE ORIENTATION OF FOUNDATION AS PER FOUNDATION FOUNDATION BOLT SHALL BE VERIFIED BEFORE CONSTRUCTION.
 3. DISCREPANCY OF ANY KIND SHALL BE BROUGHT TO THE ATTENTION OF CC-CHIEF IMMEDIATELY.

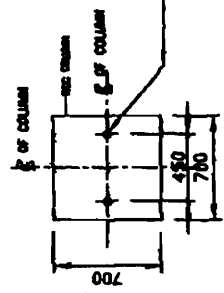


DETAIL AT - 'X'

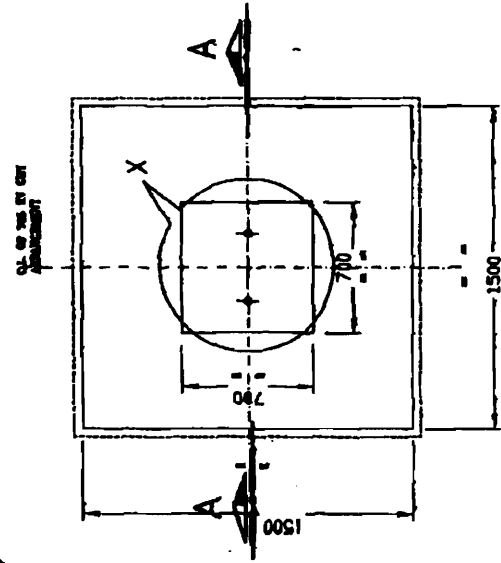

FOUNDATION PLAN FOR STANDARD 765 KV GUY ARRANGEMENT




SECTION B-B




RELEASED FOR CONSTRUCTION

Annex-B

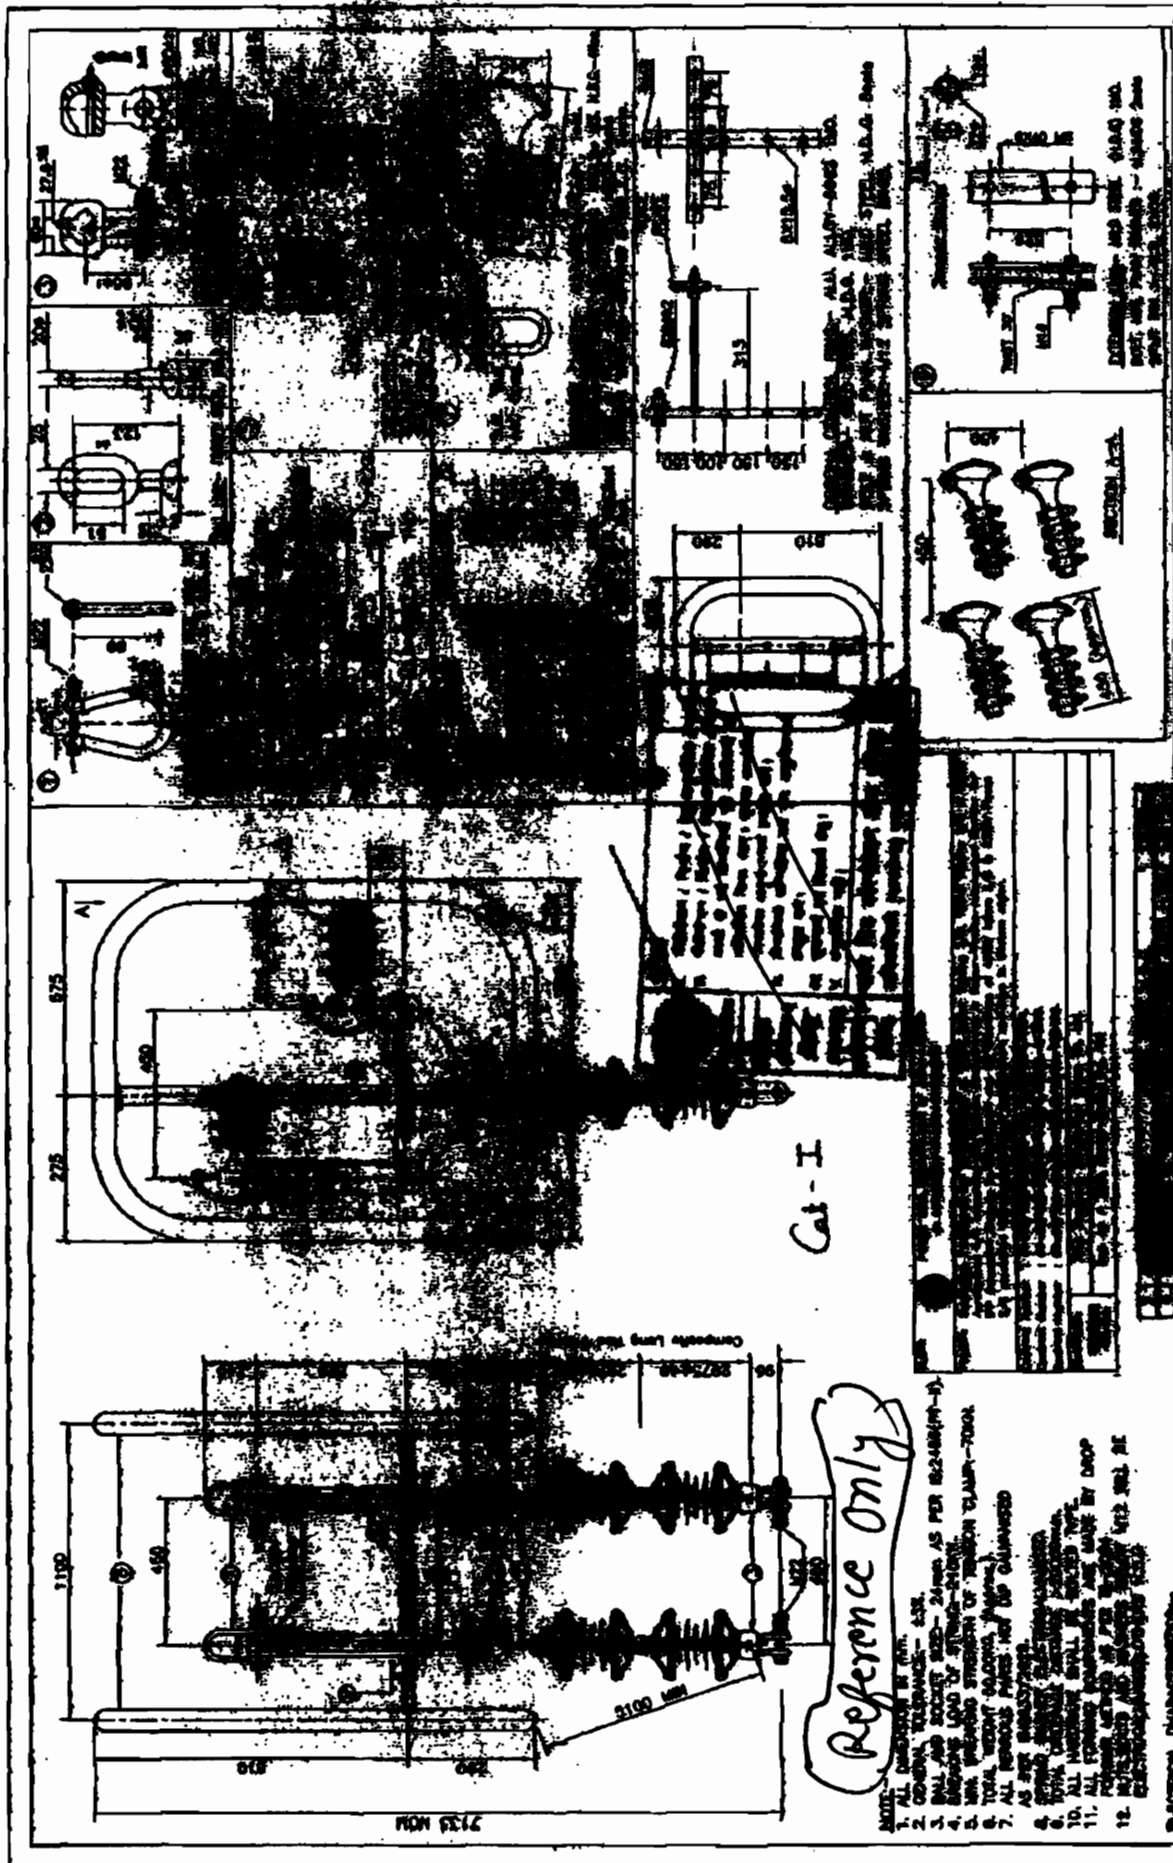


Page 2 of 4

Appendix-B

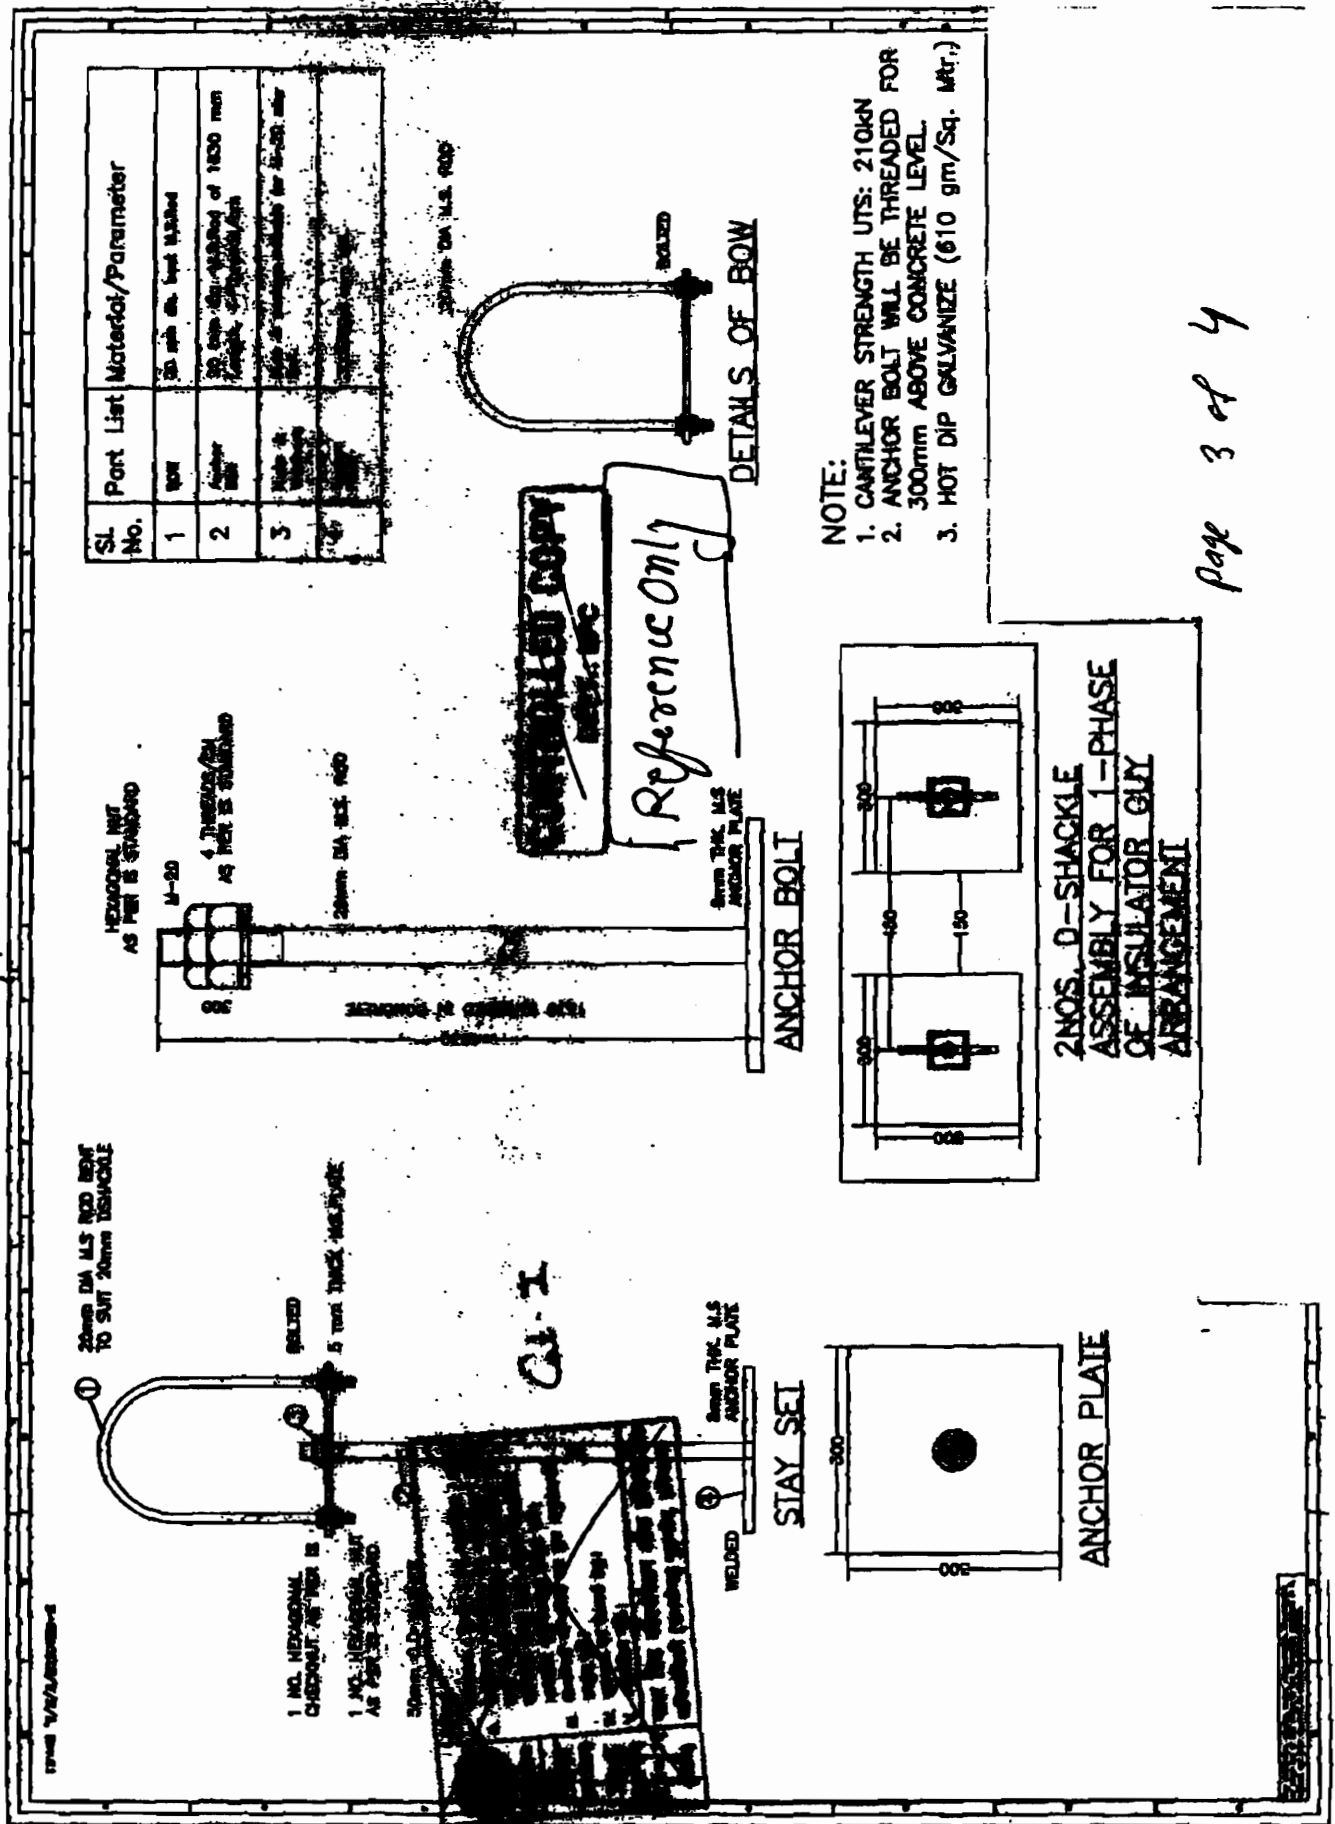

Annexure-B

General Notes
1. FOR DETAILS OF FDM BOLTS REFER APPROVED STRUCTURE DRAWING.
2. IN THIS DRAWING, 'GUY' ARRANGEMENT STEEL CONFORMING TO IS:1786 - 1985 OF GRADE Fe 500
3. LAP LENGTH SHALL BE 47 TIMES DIA OF BAR.
4. PROVIDE CLEAR COVER TO REIN. AS UNDER.
• 50mm FOR BOTTOM, TOP & SIDE REINFORCEMENT OF RAFT.
• 50mm FOR COLUMN.
5. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE NOTED.
6. DO NOT SCALE THE DRAWING. ONLY WRITTEN DIMENSIONS SHALL BE FOLLOWED.
7. UNLESS OTHERWISE NOTED ALL CONCRETE SHALL BE OF GRADE M-25.
8. FOR ORIENTATION OF FOUNDATION REFER APPROVED FDM LAYOUT.
9. FINAL EXCAVATION LEVEL SHALL BE MIN. 500mm BELOW MGL.
10. IF EXPANSIVE SOIL IS ENCOUNTERED AT FOUNDING LVL., IT SHALL BE REMOVED TO A DEPTH OF 300mm AND REPLACED WITH C&S MATERIAL OR LOCALLY AVAILABLE GOOD EARTH IN 3 FOUND LAYERS.
11. THIS DRAWING IS APPLICABLE FOR S.B.C. OF 87/2mm OR ABOVE.
REF. DRAWING : C/ONG/STD/GUY ARR. 2 SHEETS, TILED 'GUY' ARRANGEMENT 765 KV RECO FORM ENCL. 5/5 MCE NEW DTD. 12.03.16

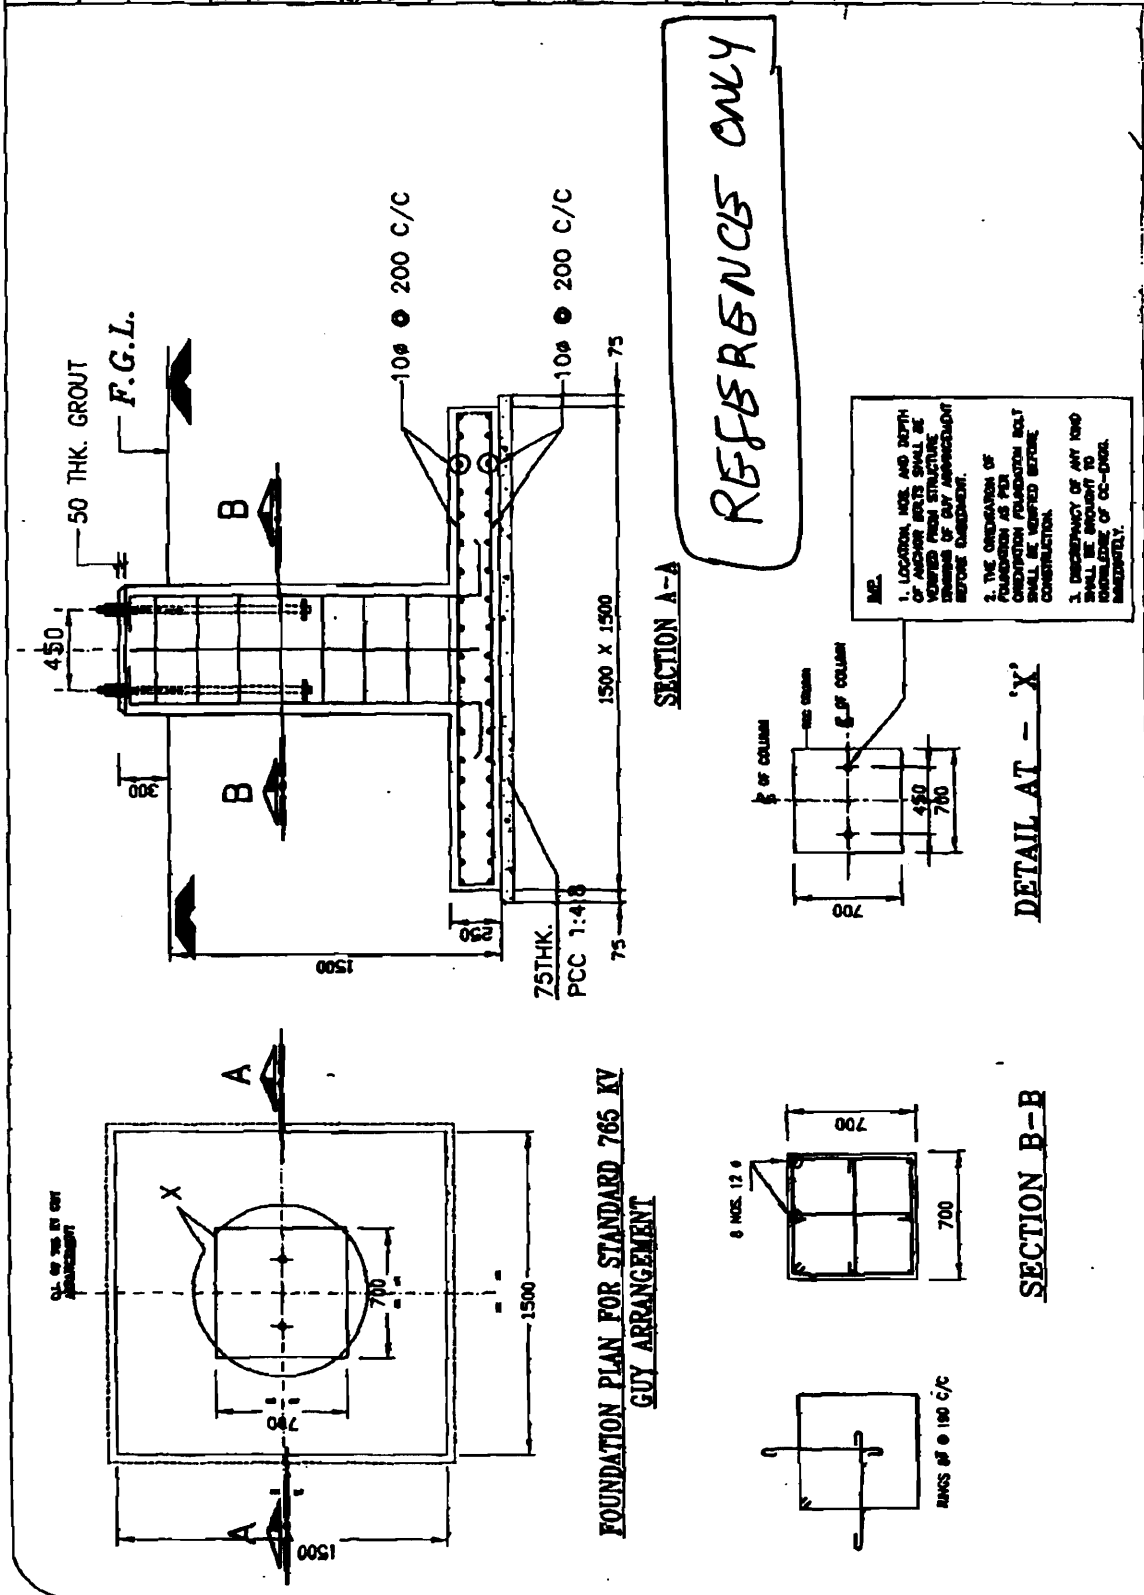

SECTION-3

PROJECT DETAILS & GENERAL SPECIFICATION

SITE INFORMATION

	Particular	Details
a)	Owner	POWERGRID
b)	Customer	POWERGRID
c)	Project Title	Substation Package – Substation Package -SS01 for Construction of 765/400/220kV Bhuj Pool (New) S/S and Extension of 765kV Banaskantha S/S under Green Energy Corridors: Inter-State Transmission Scheme (ISTS) – Part C.
d)	Location	Bhuj, Gujrat Banaskantha , Gujrat
e)	Transport Facilities	ROAD/TRAIN, For Bhuj Nearest Rail Head: Bhuj ROAD/TRAIN, For Banaskantha Nearest Rail Head: Palanpur
SITE CONDITIONS		
a)	Max. ambient air temp.	50°C
b)	Min. ambient air temp.	0°C
c)	Max. design ambient temp.	50°C
d)	Design reference temp.	50°C
e)	Average Humidity	Max. 100%
f)	Special corrosion conditions	No
g)	Solar Radiation	1.2kW/sqmtr
h)	Atmospheric UV radiation	High
i)	Altitude above sea level	Less than 1000meter
j)	Pollution Severity	High Pollution level (31mm/kV) For BHUJ High Polution (25mm/kV) for Banaskantha
k)	Seismic Zone	As per the seismic zone defined in the relevant BIS / IEC-62271-300 but not less than 0.3g horrrizontal
WIND DATA		
	Wind velocity	As per IS

	Average No. of thunderstorm days per annum	As per IS
	Main Electrical Parameters:	
	Fault Levels:	765kV: 50kA for 1 sec 400kV: 63kA for 1 sec 220kV: 40kA for 1 sec
	Creepage Distance	31mm/kV for 765kV/400kV/220kV BHUJ S/S 25mm/kV for Extn. of 765kV Banaskantha S/S

Remark – (1.) All switchgear/equipment's, insulator strings, bushings (including bushings for 400/220kV Autotransformers & 420kV Reactor), bus post insulators at **Bhuj Pool substation shall be designed for minimum creepage distance of 31mm/kV instead of 25mm/kV mentioned elsewhere in other sections of technical specification.** For Banaskantha substation, minimum creepage distance shall be 25mm/kV.

1.0 GENERAL

This Chapter covers Technical Requirements and requirements of auxiliary items.

- Equipment furnished shall be complete in every respect with all mountings, fittings, fixtures and standard accessories normally provided with such equipment and/or needed for erection, completion and safe operation of the equipment as required by applicable codes unless included in the list of exclusions.
- Material and components not specifically stated in this specification but which are necessary for satisfactory operation of the equipment and accessories specified in this specification shall be deemed to be included unless specifically excluded and shall be supplied at no extra cost.
- Whenever a material or article is specified or described by the name of a particular brand, manufacturer or vendor, the specific name mentioned shall be understood as establishing type, function and quality and not as limiting competition.
- In case any Deviation Schedule, Bid Proposal Sheet, Schedule of Data Requirements (DRS), test reports or any other document/information are not furnished along-with the bid, the bid is liable to be rejected. Unless brought out clearly, the Bid will be deemed to conform to the specification scrupulously. All deviations from the specification shall be clearly brought out in the respective deviation schedule.
- The Bidder shall clearly indicate in the bid, the specific standards in accordance with which the works will be carried out.

- g) The equipment must be new, of highest grade, the best quality of their kind, to best engineering practice and latest state of art, and in accordance with purpose for which they are intended and ensure satisfactory performance throughout the service life.
- h) All similar parts of the equipment shall be made to gauge and shall be interchangeable with and shall be made of same materials and workmanship as the corresponding parts of the equipment. Where feasible, common components, units shall be employed in different pieces of equipment in order to optimize the spare part stock-up and utilization.
- i) The requirement regarding external RIV as specified for equipment shall include the terminal fittings and the equipment shall have been tested preferably with fittings, if any.

2.0 SERVICES TO BE PERFORMED BY THE EQUIPMENT BEING FURNISHED

- a) The equipment furnished under this specification shall perform all its functions and operate satisfactorily without showing undue strain, restrike etc.
- b) The equipment shall be able to withstand forces due to wind load, short circuit, system over voltages, fluctuations, frequency variations etc., all forces considered together.

3.0 SUPPORT STRUCTURES (If in the scope of Bidder)

- a) The support structures should be hot dip galvanised with minimum **610 gm/sq-m** net of zinc.
- b) **Zinc coating for galvanized lattice and pipe structures (excluding foundation bolts & fasteners) at Bhuj Pool substation shall not be less than 900 gm/sq-m irrespective of other values mentioned elsewhere in technical specification/ drawings.**
- b) The design calculations taking into account the environmental conditions of the substations shall be furnished for sizing of the structures.

4.0 STANDARDS

- a) The equipment to be furnished under this specification shall conform to latest issue with all amendments of standard specified under respective Chapters of this Specification. The Bidder shall note that standards mentioned in the specification are not mutually exclusive or complete in themselves, but intended to compliment each other. The bidder shall also note that list of standards presented in this specification is not complete. Whenever necessary the list of standards shall be considered in conjunction with specific IS/IEC. When the specific requirements stipulated in the specifications exceed or differ than those required by the applicable standards, the stipulation of the specification shall take precedence.
- b) Other internationally accepted standards which ensure equivalent or better performance than that specified in the standards referred shall also be accepted.
- c) In case governing standards for the equipment is different from IS or IEC, the

salient points of difference shall be clearly brought out in additional information schedule alongwith English language version of standard or relevant extract of the same. The equipment conforming to standards other than IS/IEC shall be subject to POWERGRID's approval.

5.0 ENGINEERING DATA AND DRAWINGS

5.1 The list of drawings/documents which are to be submitted to the Purchaser shall be discussed and finalised by the Purchaser at the time of award. The supplier shall necessarily submit all the drawings/ documents unless anything is waived.

5.2 The Contractor shall submit 4 (four) sets of drawings/ design documents /data / detailed bill of quantity and 1 (one) set of test reports for the approval of the Purchaser. The contractor shall also submit the softcopy of the above documents in addition to hardcopy.

5.3 Drawings

5.3.1 All drawings submitted by the Contractor shall be in sufficient detail to indicate the type, size, arrangement, material description, Bill of Materials, weight of each component, break-up for packing and shipment, dimensions, internal & the external connections, fixing arrangement required and any other information specifically requested in the specifications.

5.3.2 Drawings submitted by the Contractor shall be clearly marked with the name of the Purchaser, the unit designation, the specifications title, the specification number and the name of the Project. POWERGRID has standardized a large number of drawings/documents of various make including type test reports which can be used for all projects having similar requirements and in such cases no project specific approval (except for list of applicable drawings alongwith type test reports) is required. However, distribution copies of standard drawings/documents shall be submitted as per provision of the contract. All titles, noting, markings and writings on the drawing shall be in English. All the dimensions should be in SI units.

5.3.3 The review of these data by the Purchaser will cover only general conformance of the data to the specifications and documents, interfaces with the equipment provided under the specifications, external connections and of the dimensions which might affect substation layout. This review by the Purchaser may not indicate a thorough review of all dimensions, quantities and details of the equipment, materials, any devices or items indicated or the accuracy of the information submitted. This review and/or approval by the Purchaser shall not be considered by the Contractor, as limiting any of his responsibilities and liabilities for mistakes and deviations from the requirements, specified under these specifications and documents.

5.4 All manufacturing and fabrication work in connection with the equipment prior to the approval of the drawings shall be at the Contractor's risk. The Contractor may make any changes in the design which are necessary to make the equipment conform to the provisions and intent of the Contract and such changes will again be subject to approval by the Purchaser. Approval of Contractor's drawing or work by the Purchaser shall not relieve the contractor of any of his responsibilities and liabilities under the Contract.

5.5 All engineering data submitted by the Contractor after final process including

review and approval by the Purchaser shall form part of the Contract Document and the entire works performed under these specifications shall be performed in strict conformity, unless otherwise expressly requested by the Purchaser in Writing.

5.7 Approval Procedure

The scheduled dates for the submission of the drawings as well as for, any data/information to be furnished by the Purchaser would be discussed and finalised at the time of award. The following schedule shall be followed generally for approval and for providing final documentation.

- | | | |
|-------|--|---|
| i) | Approval/comments/
Purchaser on initial | As per agreed by
schedule submission |
| ii) | Resubmission
(whenever
required) | Within 3 (three) weeks
from date of comments |
| iii) | Approval or comments | Within 3 (three) weeks of
receipt of resubmission. |
| iv) | Furnishing of distribution
copies (5 hard copies per
substation and one scanned
copy (pdf format) for Corporate
Centre) | 2 weeks from the date
of approval |
| v) | Furnishing of distribution copies of test reports | |
| (a) | Type test reports
(one scanned softcopy in
pdf format per substation plus one for corporate centre
& one hardcopy per substation) | 2 weeks from the date
of final approval |
| (b) | Routine Test Reports
(one copy for each substation) | -do- |
| vi) | Furnishing of instruction/
manuals (2 copies
per substation and one softcopy
(pdf format) for corporate centre
& per substation) | As per agreed schedule operation |
| (vii) | As built drawings (two sets of
hardcopy per substation & one
softcopy (pdf format) for
corporate centre & per substation) | On completion of entire works |

NOTE :

- (1) The supplier may please note that all resubmissions must incorporate all comments given in the earlier submission by BHEL/POWERGRID or adequate justification for not incorporating the same must be submitted failing which the submission of documents is likely to be returned.
- (2) All drawings should be submitted in softcopy form, however substation design drawings like SLD, GA, all layouts etc. shall also be submitted in AutoCAD Version. SLD, GA & layout drawings shall be submitted for the entire substation in case of substation extension also.

- (3) The instruction Manuals shall contain full details of drawings of all equipment being supplied under this contract, their exploded diagrams with complete instructions for storage, handling, erection, commissioning, testing, operation, trouble shooting, servicing and overhauling procedures.
- (4) If after the commissioning and initial operation of the substation, the instruction manuals require any modifications/ additions/changes, the same shall be incorporated and the updated final instruction manuals shall be submitted by the supplier to BHEL/POWERGRID.
- (5) The manufacturer shall furnish to the Purchaser catalogues of spare parts.
- (6) All As-built drawings/documents shall be certified by site indicating the changes before final submission.

6.0 MATERIAL WORKMANSHIP

6.1 General Requirement

- 6.1.1 Where the specification does not contain references to workmanship, equipment, materials and components of the covered equipment, it is essential that the same must be new, of highest grade of the best quality of their kind, conforming to best engineering practice and suitable for the purpose for which they are intended.
- 6.1.2 In case where the equipment, materials or components are indicated in the specification as "similar" to any special standard, the Purchaser shall decide upon the question of similarity. When required by the specification or when required by the Purchaser the Contractor shall submit, for approval, all the information concerning the materials or components to be used in manufacture. Machinery, equipment, materials and components supplied, installed or used without such approval shall run the risk of subsequent rejection, it being understood that the cost as well as the time delay associated with the rejection shall be borne by the supplier.
- 6.1.3 The design of the Works shall be such that installation, future expansions, replacements and general maintenance may be undertaken with a minimum of time and expenses. Each component shall be designed to be consistent with its duty and suitable factors of safety, subject to mutual agreements. All joints and fastenings shall be devised, constructed and documented so that the component parts shall be accurately positioned and restrained to fulfill their required function. In general, screw threads shall be standard metric threads.
The use of other thread forms will only be permitted when prior approval has been obtained from the BHEL/POWERGRID.
- 6.1.4 Whenever possible, all similar part of the Works shall be made to gauge and shall also be made interchangeable with similar parts. All spare parts shall also be interchangeable and shall be made of the same materials and workmanship as the corresponding parts of the Equipment supplied under the Specification. Where feasible, common component units shall be employed in different pieces of equipment in order to minimize spare parts stocking requirements. All equipment of the same type and rating shall be physically and electrically interchangeable.
- 6.1.5 All materials and equipment shall be installed in strict accordance with the manufacturer's recommendation(s). Only first-class work in accordance with the best modern practices will be accepted. Installation shall be considered as being the erection of equipment at its permanent location. This, unless

otherwise specified, shall include unpacking, cleaning and lifting into position, grouting, levelling, aligning, coupling of or bolting down to previously installed equipment bases/foundations, performing the alignment check and final adjustment prior to initial operation, testing and commissioning in accordance with the manufacturer's tolerances, instructions and the Specification. All factory assembled rotating machinery shall be checked for alignment and adjustments made as necessary to re-establish the manufacturer's limits suitable guards shall be provided for the protection of personnel on all exposed rotating and / or moving machine parts and shall be designed for easy installation and removal for maintenance purposes. The spare equipment(s) shall be installed at designated locations and tested for healthiness.

- 6.1.6 The supplier shall apply oil and grease of the proper specification to suit the machinery, as is necessary for the installation of the equipment. Lubricants used for installation purposes shall be drained out and the system flushed through where necessary for applying the lubricant required for operation. The supplier shall apply all operational lubricants to the equipment installed by him.
- 6.1.7 All oil, grease and other consumables used in the Works/ Equipment shall be purchased in India unless the Contractor has any special requirement for the specific application of a type of oil or grease not available in India. In such is the case he shall declare in the proposal, where such oil or grease is available. He shall help POWERGRID in establishing equivalent Indian make and Indian Contractor. The same shall be applicable to other consumables too.
- 6.1.8 Corona and radio interference voltage test and seismic withstand test (for 132kV and above voltage level) procedures for equipments shall be in line with the procedure given at Annexure-A and B respectively.

6.2 Provisions For Exposure to Hot and Humid climate

Outdoor equipment supplied under the specification shall be suitable for service and storage under tropical conditions of high temperature, high humidity, heavy rainfall and environment favourable to the growth of fungi and mildew. The indoor equipments located in non-air conditioned areas shall also be of same type.

6.2.1 Space Heaters

- 6.2.1.1 The heaters shall be suitable for continuous operation at 240V as supply voltage. On-off switch and fuse shall be provided.
- 6.2.1.2 One or more adequately rated thermostatically connected heaters shall be supplied to prevent condensation in any compartment. The heaters shall be installed in the compartment and electrical connections shall be made sufficiently away from below the heaters to minimize deterioration of supply wire insulation. The heaters shall be suitable to maintain the compartment temperature to prevent condensation.
- 6.2.1.3 Suitable anti condensation heaters with the provision of thermostat shall be provided.

6.2.2 FUNGI STATIC VARNISH

Besides the space heaters, special moisture and fungus resistant varnish shall be applied on parts which may be subjected or predisposed to the formation of fungi due to the presence or deposit of nutrient substances. The varnish shall not be applied to any surface of part where the treatment will interfere with the

operation or performance of the equipment. Such surfaces or parts shall be protected against the application of the varnish.

6.2.3 Ventilation opening

Wherever ventilation is provided, the compartments shall have ventilation openings with fine wire mesh of brass to prevent the entry of insects and to reduce to a minimum the entry of dirt and dust. Outdoor compartment openings shall be provided with shutter type blinds and suitable provision shall be made so as to avoid any communication of air / dust with any part in the enclosures of the Control Cabinets, Junction boxes and Marshalling Boxes, panels etc.

6.2.4 Degree of Protection

The enclosures of the Control Cabinets, Junction boxes and Marshalling Boxes, panels etc. to be installed shall provide degree of protection as detailed here under:

- a) Installed out door: IP- 55
- b) Installed indoor in air conditioned area: IP-31
- c) Installed in covered area: IP-52
- d) Installed indoor in non air conditioned area where possibility of entry of water is limited: IP-41.
- e) For LT Switchgear (AC & DC distribution Boards) : IP-52

The degree of protection shall be in accordance with IS:13947 (Part-I) / IEC-60947(Part-I) / IS 12063 / IEC-60529. Type test report for degree of protection test, shall be submitted for approval.

6.3 RATING PLATES, NAME PLATES AND LABELS

Each main and auxiliary item of substation is to have permanently attached to it in a conspicuous position a rating plate of non-corrosive material upon which is to be engraved manufacturer's name, year of manufacture, equipment name, type or serial number together with details of the loading conditions under which the item of substation in question has been designed to operate, and such diagram plates as may be required by the Purchaser. The rating plate of each equipment shall be according to IEC requirement.

All such nameplates, instruction plates, rating plates of transformers, reactors, CB, CT, CVT, SA, Isolators, C & R panels and PLCC equipments shall be bilingual with Hindi inscription first followed by English. Alternatively two separate plates one with Hindi and the other with English inscriptions may be provided.

6.4 FIRST FILL OF CONSUMABLES, OIL AND LUBRICANTS

All the first fill of consumables such as oils, lubricants, filling compounds, touch up paints, soldering/brazing material for all copper piping of circuit breakers and essential chemicals etc. which will be required to put the equipment covered under the scope of the specifications, into successful Operation, shall be furnished by the supplier unless specifically excluded under the exclusions in these specifications and documents.

7.0 DESIGN IMPROVEMENTS / COORDINATION

- 7.1 The bidder shall note that the equipment offered by him in the bid only shall be accepted for supply. However, the Purchaser or the Contractor

may propose changes in the specification of the equipment or quality thereof and if the Purchaser & contractor agree upon any such changes, the specification shall be modified accordingly.

- 7.2 If any such agreed upon change is such that it affects the price and schedule of completion, the parties shall agree in writing as to the extent of any change in the price and/or schedule of completion before the Contractor proceeds with the change. Following such agreement, the provision thereof, shall be deemed to have been amended accordingly.
- 7.3 The supplier shall be responsible for the selection and design of appropriate equipments to provide the best co-ordinated performance of the entire system. The basic design requirements are detailed out in this Specification. The design of various components, sub-assemblies and assemblies shall be so done that it facilitates easy field assembly and maintenance.
- 7.4 The supplier has to coordinate designs and terminations with the agencies (if any) who are Consultants/Contractor for the Purchaser. The names of agencies shall be intimated to the successful bidders.
- 7.5 The supplier will be called upon to attend design co-ordination meetings with the Engineer, other Contractor's and the Consultants of the Purchaser (if any) during the period of Contract. The Contractor shall attend such meetings at his own cost at POWERGRID Corporate Centre, Gurgaon (Haryana) or at mutually agreed venue as and when required and fully cooperate with such persons and agencies involved during those discussions.

8.0 QUALITY ASSURANCE PROGRAMME

- 8.1 To ensure that the equipment and services under the scope of this Contract whether manufactured or performed within the supplier's Works or at his Sub- contractor's premises or at the Purchaser's site or at any other place of Work are in accordance with the specifications, the supplier shall adopt suitable quality assurance programme to control such activities at all points necessary. The detailed programme shall be submitted by the contractor after the award for reference. A quality assurance programme of the supplier shall generally cover the following:
- (a) His organisation structure for the management and implementation of the proposed quality assurance programme;
 - (b) Documentation control system;
 - (c) Qualification data for bidder's key personnel;
 - (d) The procedure for purchases of materials, parts components and selection of sub-Contractor's services including vendor analysis, source inspection, incoming raw material inspection, verification of material purchases etc.
 - (e) System for shop manufacturing and site erection controls including process controls and fabrication and assembly control;
 - (f) Control of non-conforming items and system for corrective actions;
 - (g) Inspection and test procedure both for manufacture and field activities.
 - (h) Control of calibration and testing of measuring instruments and field activities;

- (i) System for indication and appraisal of inspection status;
- (j) System for quality audits;
- (k) System for authorising release of manufactured product to the Purchaser.
- (l) System for maintenance of records;
- (m) System for handling storage and delivery; and
- (n) A quality plan detailing out the specific quality control measures and procedures adopted for controlling the quality characteristics relevant to each item of equipment furnished and/or services rendered.

POWERGRID/BHEL or his duly authorised representative reserves the right to carry out quality audit and quality surveillance of the system and procedure of the supplier/his vendor's quality management and control activities.

8.2 Quality Assurance Documents

The supplier would be required to submit all the Quality Assurance Documents as stipulated in the Quality Plan at the time of POWERGRID/BHEL inspection of equipment/material

9.0 TYPE TESTING, INSPECTION, TESTING & INSPECTION CERTIFICATE

9.1 All equipment being supplied shall conform to type tests as per technical specification and shall be subject to routine tests in accordance with requirements stipulated under respective sections.

9.2 The reports for all type tests as per technical specification shall be furnished by the supplier alongwith equipment / material drawings. However, type test reports of similar equipments/ material already accepted in POWERGRID shall be applicable for all project with similar requirement. The type tests conducted earlier should have either been conducted in accredited laboratory (accredited based on ISO / IEC Guide 25 / 17025 or EN 45001 by the national accreditation body of the country where laboratory is located) or witnessed by POWERGRID or representative authorized by POWERGRID or Utility or representative of accredited test lab or reputed consultant.

The test reports submitted shall be of the tests conducted within last 10 (ten) years prior to the date of bid opening i.e. 26.08.11. In case the test reports are of the test conducted earlier than 10 (ten) years prior to the date of bid opening, the contractor shall repeat these test(s) at no extra cost to BHEL.

However, in case of instrument transformers, the following type tests should have been conducted within 5 (five) years prior to the date of bid opening.

- i) Lightning Impulse Test
- ii) Switching Impulse Test
- iii) Multiple Chopped Impulse Test (For CT)
- iv) Chopped Impulse Test (For CVT)

In case the test reports are of these tests (for instrument transformers) as mentioned above are conducted earlier than 5 (five) years prior to the date of bid opening i.e. 26.08.11, the contractor shall repeat these test(s) at no extra cost to the purchaser.

Further, in the event of any discrepancy in the test reports i.e. any test report not acceptable due to any design/manufacturing changes (including substitution of components) or due to non-compliance with the requirement stipulated in the Technical Specification or any/all type tests not carried out, same shall be carried out without any additional cost implication to the Purchaser.

The supplier shall intimate the BHEL/POWERGRID the detailed program about the tests atleast two (2) weeks in advance in case of domestic supplies & six (6) weeks in advance in case of foreign supplies.

Further, in case type tests are required to be conducted/repeated and the deputation of Inspector/Purchaser's representative is required, then all the expenses shall be borne by the supplier.

- 9.3 The Purchaser intends to repeat the type tests on Power Transformer and Shunt Reactor except Dynamic short circuit tests on transformers, for which test charges shall be payable as per provision of contract. The price of conducting type tests shall be included in Bid price and break up of these shall be given in the relevant schedule of Bid Proposal Sheets. These Type test charges would be considered in bid evaluation. In case Bidder does not indicate charges for any of the type tests or does not mention the name of any test in the price schedules, it will be presumed that the particular test has been offered free of charge. Further, in case any Bidder indicates that he shall not carry out a particular test, his offer shall be considered incomplete and shall be liable to be rejected. BHEL/POWERGRID reserves the right to witness any or all the type tests. The BHEL/POWERGRID also reserves the right to waive the repeating of type tests partly or fully and in case of waiver, test charges for the same shall not be payable.

The Purchaser shall bear all expenses for deputation of purchaser's representative(s) for witnessing the type tests under this clause except in the case of re-deputation if any, necessitated due to no fault of the purchaser.

For outdoor receptacles, trefoil clamps, diesel engine, alternator, motors, cable glands, lighting fixtures, ACSR/AAC conductor, IPS aluminum tube and junction boxes, type test reports are not required to be submitted for the makes indicated at Annexure-E /POWERGRID approved list of subvendors. For the new makes(other than those indicated at Annexure-E / POWERGRID approved list of subvendors), type test reports as per relevant standard shall be submitted for POWERGRID's approval.

- 9.4 The Purchaser, his duly authorised representative and/or outside inspection agency acting on behalf of the Purchaser shall have at all reasonable times free access to the Contractor's/sub-vendors premises or Works and shall have the power at all reasonable times to inspect and examine the materials and workmanship of the Works during its manufacture or erection if part of the Works is being manufactured or assembled at other premises or works, the Contractor shall obtain for the Engineer and for his duly authorised representative permission to inspect as if the works were manufactured or assembled on the Contractor's own premises or works. Inspection may be made at any stage of manufacture, despatch or at site at the option of the Purchaser and the equipment if found unsatisfactory due to bad workmanship or quality, material is liable to be rejected.

- 9.5 The supplier shall give the Purchaser /Inspector fifteen (15) days written notice for on-shore and six (6) weeks notice for off-shore material being ready for joint testing including contractor and POWERGRID. Such tests shall be to the Contractor's account except for the expenses of the Inspector. The Purchaser/inspector, unless witnessing of the tests is virtually waived, will attend such tests within fifteen (15) days of the date of which the equipment is notified as being ready for test/inspection, failing which the Contractor may proceed alone with the test which shall be deemed to have been made in the Inspector's presence and he shall forthwith forward to the Inspector duly certified copies of tests in triplicate.
- 9.6 The Purchaser or Inspector shall, within fifteen (15) days from the date of inspection as defined herein give notice in writing to the Contractor, of any objection to any drawings and all or any equipment and workmanship which in his opinion is not in accordance with the Contract. The Contractor shall give due consideration to such objections and shall either make the modifications that may be necessary to meet the said objections or shall confirm in writing to the Purchaser /Inspector giving reasons therein, that no modifications are necessary to comply with the Contract.
- 9.7 When the factory tests have been completed at the Contractor's or Sub- Contractor's works, the Purchaser/inspector shall issue a certificate to this effect within fifteen (15) days after completion of tests but if the tests are not witnessed by the Purchaser /Inspector, the certificate shall be issued within fifteen (15) days of receipt of the Contractor's Test certificate by the Engineer/Inspector. Failure of the Purchaser /Inspector to issue such a certificate shall not prevent the Contractor from proceeding with the Works. The completion of these tests or the issue of the certificate shall not bind the Purchaser to accept the equipment should, it, on further tests after erection, be found not to comply with the Contract. The equipment shall be dispatched to site only after approval of test reports and issuance of CIP by the Purchaser.
- 9.8 In all cases where the Contract provides for tests whether at the premises or at the works of the Contractor or of any Sub-Contractor, the Contractor except where otherwise specified shall provide free of charge such items as labour, materials, electricity, fuel, water, stores, apparatus and instruments as may be reasonably demanded by the Purchaser /Inspector or his authorised representative to carry out effectively such tests of the equipment in accordance with the Contract and shall give facilities to the Purchaser /Inspector or to his authorised representative to accomplish testing.
- 9.9 The inspection by Purchaser and issue of Inspection Certificate thereon shall in no way limit the liabilities and responsibilities of the Contractor in respect of the agreed quality assurance programme forming a part of the Contract.
- 9.10 The Purchaser will have the right of having at his own expenses any other test(s) of reasonable nature carried out at Contractor's premises or at site or in any other place in addition of aforesaid type and routine tests, to satisfy that the material comply with the specification.
- 9.11 The Purchaser reserves the right for getting any field tests not specified in respective sections of the technical specification conducted on the completely assembled equipment at site. The testing equipments for these

tests shall be provided by the Purchaser.

10.0 TESTS

10.1 Pre-commissioning Tests

On completion of erection of the equipment and before charging, each item of the equipment shall be thoroughly cleaned and then inspected jointly by the Purchaser and the Contractor for correctness and completeness of installation and acceptability for charging, leading to initial pre-commissioning tests at Site. The list of pre-commissioning tests to be performed are given in respective chapters and shall be included in the Contractor's quality assurance programme.

10.2 Commissioning Tests

10.2.1 The available instrumentation and control equipment will to be used during such tests and the Purchaser will calibrate, all such measuring equipment and devices as far as practicable.

10.2.2 Any special equipment, tools and tackles required for the successful completion of the Commissioning Tests shall be provided by the Contractor, free of cost.

10.2.3 The specific tests requirement on equipment have been brought out in the respective chapters of the technical specification.

10.3 The Contractor shall be responsible for obtaining statutory clearances from the concerned authorities for commissioning the equipment and the switchyard. However necessary fee shall be reimbursed by POWERGRID on production of requisite documents.

11.0 PACKAGING & PROTECTION

11.1 All the equipments shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at Site till the time of erection. On request of the Purchaser, the Contractor shall also submit packing details/associated drawing for any equipment/material under his scope of supply, to facilitate the Purchaser to repack any equipment/material at a later date, in case the need arises. While packing all the materials, the limitation from the point of view of availability of Railway wagon sizes in India should be taken into account. The Contractor shall be responsible for any loss or damage during transportation, handling and storage due to improper packing. Any demurrage, wharfage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor. Purchaser takes no responsibility of the availability of the wagons.

11.2 All coated surfaces shall be protected against abrasion, impact, discolouration and any other damages. All exposed threaded portions shall be suitably protected with either a metallic or a non-metallic protecting device. All ends of all valves and pipings and conduit equipment connections shall be properly sealed with suitable devices to protect them from damage.

12.0 FINISHING OF METAL SURFACES

12.1 All metal surfaces shall be subjected to treatment for anti-corrosion protection. All ferrous surfaces for external use unless otherwise stated elsewhere in the specification or specifically agreed, shall be hot-dip galvanized after fabrication. High tensile steel nuts & bolts and spring washers shall be electro galvanized to service condition 4. All steel conductors including those used for

earthing/grounding (above ground level) shall also be galvanized according to IS:2629.

12.2 HOT DIP GALVANISING

12.2.1 The minimum weight of the zinc coating shall be 610 gm/sq.m and minimum average thickness of coating shall be 86 microns for all items having thickness 6mm and above. For items lower than 6mm thickness requirement of coating thickness shall be as per relevant ASTM. For surface which shall be embedded in concrete, the zinc coating shall be 610 gm/sq. m minimum.

12.2.2 The galvanized surfaces shall consist of a continuous and uniform thick coating of zinc, firmly adhering to the surface of steel. The finished surface shall be clean and smooth and shall be free from defects like discoloured patches, bare spots, unevenness of coating, spelter which is loosely attached to the steel globules, spiky deposits, blistered surface, flaking or peeling off, etc. The presence of any of these defects noticed on visual or microscopic inspection shall render the material liable to rejection.

12.2.3 After galvanizing, no drilling or welding shall be performed on the galvanized parts of the equipment excepting that nuts may be threaded after galvanizing. Sodium dichromate treatment shall be provided to avoid formation of white rust after hot dip galvanization.

12.2.4 The galvanized steel shall be subjected to six one minute dips in copper sulphate solution as per IS-2633.

12.2.5 Sharp edges with radii less than 2.5 mm shall be able to withstand four immersions of the Standard Preece test. All other coatings shall withstand six immersions. The following galvanizing tests should essentially be performed as per relevant Indian Standards.

- Coating thickness
- Uniformity of zinc
- Adhesion test
- Mass of zinc coating

12.2.6 Galvanised material must be transported properly to ensure that galvanised surfaces are not damaged during transit. Application of zinc rich paint at site shall not be allowed.

12.3 PAINTING

12.3.1 All sheet steel work shall be degreased, pickled, phosphated in accordance with the IS-6005 "Code of practice for phosphating iron and sheet". All surfaces, which will not be easily accessible after shop assembly, shall beforehand be treated and protected for the life of the equipment. The surfaces, which are to be finished painted after installation or require corrosion protection until installation, shall be shop painted with at least two coats of primer. Oil, grease, dirt and swarf shall be thoroughly removed by emulsion cleaning. Rust and scale shall be removed by pickling with dilute acid followed by washing with running water, rinsing with slightly alkaline hot water and drying.

12.3.2 After phosphating, thorough rinsing shall be carried out with clean water followed by final rinsing with dilute dichromate solution and oven drying. The phosphate coating shall be sealed with application of two coats of ready

mixed, stoving type zinc chromate primer. The first coat may be “flash dried” while the second coat shall be stoved.

12.3.3 After application of the primer, two coats of finishing synthetic enamel paint shall be applied, each coat followed by stoving. The second finishing coat shall be applied after inspection of first coat of painting.

12.3.4 The exterior and interior colour of the paint in case of new substations shall preferably be RAL 7032 for all equipment, marshalling boxes, junction boxes, control cabinets, panels etc. unless specifically mentioned under respective sections of the equipments. Glossy white colour inside the equipments /boards/panels/junction boxes is also acceptable. The exterior colour for panels shall bematching with the existing panels in case of extension of a substation. Each coatof primer and finishing paint shall be of slightly different shade to enable inspection of the painting. A small quantity of finishing paint shall be supplied for minor touching up required at site after installation of the equipments.

12.3.5 In case the Bidder proposes to follow his own standard surface finish and protection procedures or any other established painting procedures, like electrostatic painting etc., the procedure shall be submitted alongwith the Bids for Purchaser's review & approval.

12.3.6 The colour scheme as given below shall be followed for Fire Protection and Air Conditioning systems

S.No.	PIPE LINE	Base colour	Band colour
Fire Protection System			
1	Hydrant and Emulsifier system pipeline	FIRE RED	-
2	Emulsifier system detection line – water	FIRE RED	Sea Green
3	Emulsifier system detection line – Air	FIRE RED	Sky Blue
4	Pylon support pipes	FIRE RED	
Air Conditioning System			
5	Refrigerant gas pipeline – at compressor suction	Canary Yellow	-
6	Refrigerant gas pipeline – at compressor discharge	Canary Yellow	Red
7	Refrigerant liquid pipeline	Dark Admiralty Green	-
8	Chilled water pipeline	Sea Green	-
9	Condenser water pipeline	Sea Green	Dark Blue

12.3.7 For aluminium casted surfaces, the surface shall be with smooth finish. Further, in case of aluminium enclosures the surface shall be coated with powder (coating thickness of 60 microns) after surface preparation for painting.

13.0 HANDLING, STORING AND INSTALLATION

13.1 In accordance with the specific installation instructions as shown on manufacturer's drawings or as directed by the Purchaser or his representative,

the Contractor shall unload, store, erect, install, wire, test and place into commercial use all the equipment included in the contract. Equipment shall be installed in a neat, workmanlike manner so that it is level, plumb, square and properly aligned and oriented. Commercial use of switchyard equipment means completion of all site tests specified and energisation at rated voltage.

- 13.2 Contractor may engage manufacturer's Engineers to supervise the unloading, transportation to site, storing, testing and commissioning of the various equipment being procured by them separately. Contractor shall unload, transport, store, erect, test and commission the equipment as per instructions of the manufacturer's supervisory Engineer(s) and shall extend full cooperation to them.
- 13.3 The contractor shall have to ensure that the hard and flat indoor and outdoor storage areas are in place prior to commencement of delivery of material at site. Contractor shall also ensure availability of proper unloading and material handling equipment like cranes etc. and polyester/nylon ropes of suitable capacity to avoid damage during unloading and handling of material at site. All indoor equipments shall be stored indoors. Outdoor equipment may be stored outdoors but on a hard and flat raised area properly covered with waterproof and dustproof covers to protect them from water seepage and moisture ingress. However, all associated control panels, marshalling boxes operating boxes etc. of outdoor equipments are to be stored indoors only. Storage of equipment on top of another one is not permitted if the wooden packing is used. Material opened for joint inspection shall be repacked properly as per manufacturer's recommendations. During storage of material regular periodic monitoring of important parameters like oil level / leakage, SF6 / Nitrogen pressure etc. shall be ensured by the contractor.
- 13.4 In case of any doubt/misunderstanding as to the correct interpretation of manufacturer's drawings or instructions, necessary clarifications shall be obtained from the Purchaser. Contractor shall be held responsible for any damage to the equipment consequent to not following manufacturer's drawings/instructions correctly.
- 13.5 Where assemblies are supplied in more than one section, Contractor shall make all necessary mechanical and electrical connections between sections including the connection between buses. Contractor shall also do necessary adjustments/alignments necessary for proper operation of circuit breakers, isolators and their operating mechanisms. All components shall be protected against damage during unloading, transportation, storage, installation, testing and commissioning. Any equipment damaged due to negligence or carelessness or otherwise shall be replaced by the Contractor at his own expense.
- 13.6 Supplier shall be responsible for examining all the shipment and notify the Purchaser immediately of any damage, shortage, discrepancy etc. for the purpose of Purchaser's information only. The Contractor shall submit to the Purchaser every week a report detailing all the receipts during the weeks. However, the Contractor shall be solely responsible for any shortages or damages in transit, handling and/or in storage and erection of the equipment at Site. Any demurrage, wharfage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor.

- 13.7 The supplier shall be fully responsible for the equipment/material until the same is handed over to the Purchaser in an operating condition after commissioning. Contractor shall be responsible for the maintenance of the equipment/material while in storage as well as after erection until taken over by Purchaser, as well as protection of the same against theft, element of nature, corrosion, damages etc.
- 13.8 Where material / equipment is unloaded by Purchaser before the Contractor arrives at site or even when he is at site, Purchaser by right can hand over the same to Contractor and there upon it will be the responsibility of Contractor to store the material in an orderly and proper manner.
- 13.9 The Contractor shall be responsible for making suitable indoor storage facilities, to store all equipment which requires indoor storage.
- 13.10 The words 'erection' and 'installation' used in the specification are synonymous.
- 13.11 Exposed live parts shall be placed high enough above ground to meet the requirements of electrical and other statutory safety codes.

13.12 Equipment Bases

A cast iron or welded steel base plate shall be provided for all rotating equipment which is to be installed on a concrete base unless otherwise agreed to by the Purchaser. Each base plate shall support the unit and its drive assembly, shall be of a neat design with pads for anchoring the units, shall have a raised lip all around, and shall have threaded drain connections.

14.0 TOOLS AND TACKLES

The Contractor shall supply with the equipment one complete set of all special tools and tackles for the erection, assembly, dis-assembly and maintenance of the equipment. However, these tools and tackles shall be separately, packed and brought on to Site.

15.0 AUXILIARY SUPPLY

- 15.1 The sub-station auxiliary supply is normally met through a system indicated under section "Electrical & Mechanical Auxiliaries" having the following parameters. The auxiliary power for station supply, including the equipment drive, cooling system of any equipment, air-conditioning, lighting etc shall be designed for the specified Parameters as under. The DC supply for the instrumentation and PLCC system shall also conform the parameters as indicated in the following.

Normal Voltage	Variation in Voltage	Frequency in HZ	Phase/Wire	Neutral connection
415V	± 10%	50 ± 5%	3/4 Wire	Solidly Earthed.
240V	± 10%	50 ± 5%	1/2 Wire	Solidly Earthed.
220V	190V to 240V	DC	-	Isolated 2 wire System
48V	—	DC	—	2 wire system (+) earthed

Combined variation of voltage and frequency shall be limited to ± 10%.

16.0 SUPPORT STRUCTURE (If in the scope of supplier)

16.1 The equipment support structures shall be suitable for equipment connections at the first level i.e 14.0 meter, 8.0 meter and 5.9 meter from plinth level for 765 kV, 420 kV and 245 kV substations respectively. All equipment support structures shall be supplied alongwith brackets, angles, stools etc. for attaching the operating mechanism, control cabinets & marshalling box (wherever applicable) etc.

16.2 Support structure shall meet the following mandatory requirements:

16.2.1 The minimum vertical distance from the bottom of the lowest porcelain part of the bushing, porcelain enclosures or supporting insulators to the bottom of the equipment base, where it rests on the foundation pad shall be 2.55 metres.

17.0 CLAMPS AND CONNECTORS INCLUDING TERMINAL CONNECTORS

17.1 All power clamps and connectors shall conform to IS:5561 & NEMA CC1 and shall be made of materials listed below :

- | | | |
|----|--|--|
| a) | For connecting
ACSR conductors | Aluminum alloy casting,
conforming to designation A6
of IS:617 and all test shall
conform to IS:617 |
| b) | For connecting
equipment ter-
minals made of
copper with
ACSR conductors | Bimetallic connectors made
from aluminum alloy casting,
conforming to designation A6
of IS:617 with 2mm thick
bimetallic liner and all test
shall conform to IS:617 |
| c) | For connecting G.I | Galvanised mild steel shield |
| d) | i) Bolts, nuts &
Plain, washers | i) Electrogalvanised for sizes
below M12, for others hot dip
galvanised. |
| | ii) Spring washers
items
'a' to 'c' | ii) Electro-galvanised mild for
steel suitable for atleast
service condition-3 as per
IS:1573 |

17.2 Necessary clamps and connectors shall be supplied for all equipment and connections. The requirement regarding external corona and RIV as specified for any equipment shall include its terminal fittings. If corona rings are required to meet these requirements they shall be considered as part of that equipment and included in the scope of work.

17.3 Where copper to aluminum connections are required, bi-metallic clamps shall be used, which shall be properly designed to ensure that any deterioration of the connection is kept to a minimum and restricted to parts which are not current carrying or subjected to stress.

17.4 Low voltage connectors, grounding connectors and accessories for grounding equipment as specified in each particular case, are also included in the scope of Work.

17.5 No current carrying part of any clamp shall be less than 10 mm thick. All ferrous parts shall be hot dip galvanised. Copper alloy liner of minimum 2 mm thickness shall be cast integral with aluminum body or 2 mm thick bi-

metallic strips shall be provided for Bi-metallic clamps.

- 17.6 All casting shall be free from blow holes, surface blisters, cracks and cavities. All sharp edges and corners shall be blurred and rounded off.
- 17.7 Flexible connectors, braids or laminated straps made for the terminal clamps for bus posts shall be suitable for both expansion or through (fixed/sliding) type connection of 4" IPS AL. tube as required. In both the cases the clamp height (top of the mounting pad to centre line of the tube) should be same.
- 17.8 Clamp shall be designed to carry the same current as the conductor and the temperature rise shall be equal or less than that of the conductor at the specified ambient temperature. The rated current for which the clamp/connector is designed with respect to the specified reference ambient temperature, shall also be indelibly marked on each component of the clamp/connector, except on the hardware.
- 17.9 All current carrying parts shall be designed and manufactured to have minimum contact resistance.
- 17.10 Clamps and connectors shall be designed to be corona controlled.
- 17.11 **Tests**
 - 17.11.1 Clamps and connectors should be type tested as per IS:5561 and shall also be subjected to routine tests as per IS:5561. Following type test reports shall be submitted for approval as per clause 9.2 above except for sl. no.(ii) & (iii) for which type test once conducted shall be applicable (i.e. the requirement of test conducted within last ten years shall not be applicable).
 - i) Temperature rise test (maximum temperature rise allowed is 35°C over 50°C ambient)
 - ii) Short time current test
 - iii) Corona (dry) and RIV (dry) test (for 220 KV and above voltage level clamps)
 - iv) Resistance test and tensile test

18.0 CONTROL CABINETS, JUNCTION BOXES, TERMINAL BOXES & MARSHALLING BOXES FOR OUTDOOR EQUIPMENT

- 18.1 All types of boxes, cabinets etc. shall generally conform to & be tested in accordance with IS-5039/IS-8623, IEC-60439, as applicable, and the clauses given below:
- 18.2 Control cabinets, junction boxes, Marshalling boxes & terminal boxes shall be made of sheet steel or aluminum enclosure and shall be dust, water and vermin proof. Sheet steel used shall be atleast 2.0 mm thick cold rolled or 2.5 mm hot rolled or alternately 1.6 mm thick stainless steel can also be used. The box shall be properly braced to prevent wobbling. There shall be sufficient reinforcement to provide level surfaces, resistance to vibrations and rigidity during transportation and installation. In case of aluminum enclosed box the thickness of aluminum shall be such that it provides adequate rigidity and long life as comparable with sheet steel of specified thickness.

- 18.3 A canopy and sealing arrangements for operating rods shall be provided in marshalling boxes / Control cabinets to prevent ingress of rain water.
- 18.4 Cabinet/boxes shall be provided with double hinged doors with padlocking arrangements. The distance between two hinges shall be adequate to ensure uniform sealing pressure against atmosphere. The quality of the gasket shall be such that it does not get damaged/cracked during the operation of the equipment.
- 18.5 All doors, removable covers and plates shall be gasketed all around with suitably profiled EPDM/Neoprene gaskets. The gasket shall be tested in accordance with approved quality plan, IS:11149 and IS:3400. Ventilating Louvers, if provided, shall have screen and filters. The screen shall be fine wire mesh made of brass.
- 18.6 All boxes/cabinets shall be designed for the entry of cables from bottom by means of weather proof and dust-proof connections. Boxes and cabinets shall be designed with generous clearances to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the box or cabinet. Suitable cable gland plate above the base of the marshalling kiosk/box shall be provided for this purpose along with the proper blanking plates. Necessary number of cable glands shall be supplied and fitted on this gland plate. Gland plate shall have provision for some future glands to be provided later, if required. The Nickel plated glands shall be dust proof, screw on & double compression type and made of brass. The gland shall have provision for securing armour of the cable separately and shall be provided with earthing tag. The glands shall conform to BS:6121.
- 18.7 A 240V, single phase, 50 Hz, 15 amp AC plug and socket shall be provided in the cabinet with ON-OFF switch for connection of hand lamps. Plug and socket shall be of industrial grade.
- 18.8 For illumination, a fluorescent tube or CFL of approximately 9 to 15 watts shall be provided. The switching of the fittings shall be controlled by the door switch. .
For junction boxes of smaller sizes such as lighting junction box, manual operated earth switch mechanism box etc., plug socket, heater and illumination is not required to be provided.
- 18.9 All control switches shall be of MCB/rotary switch type and Toggle/piano switches shall not be accepted.
- 18.10 Positive earthing of the cabinet shall be ensured by providing two separate earthing pads. The earth wire shall be terminated on to the earthing pad and secured by the use of self etching washer. Earthing of hinged door shall be done by using a separate earth wire.
- 18.11 The bay marshalling kiosks shall be provided with danger plate and a diagram showing the numbering/connection/wiring by pasting the same on the inside of the door.
- 18.12 a) The following routine tests along with the routine tests as per IS:5039 shall also be conducted:
i) Check for wiring
ii) Visual and dimension check
b) The enclosure of bay marshalling kiosk, junction box, terminal box shall conform to IP-55 as per IS:13947 including application of, 2.5 KV rms for 1

(one) minute, insulation resistance and functional test after IP-55 test.

19.0 Deleted.

20.0 TERMINAL BLOCKS AND WIRING

- 20.1 Control and instrument leads from the switchboards or from other equipment will be brought to terminal boxes or control cabinets in conduits. All interphase and external connections to equipment or to control cubicles will be made through terminal blocks.
- 20.2 Terminal blocks shall be 650V grade and have continuous rating to carry the maximum expected current on the terminals and non breakable type. These shall be of moulded piece, complete with insulated barriers, stud type terminals, washers, nuts and lock nuts. Screw clamp, overall insulated, insertion type, rail mounted terminals can be used in place of stud type terminals. But preferably the terminal blocks shall be non-disconnecting stud type of Elmex or Phoenix or Wago or equivalent make.
- 20.3 Terminal blocks for current transformer and voltage transformer secondary leads shall be provided with test links and isolating facilities. The current transformer secondary leads shall also be provided with short circuiting and earthing facilities.
- 20.4 The terminal shall be such that maximum contact area is achieved when a cable is terminated. The terminal shall have a locking characteristic to prevent cable from escaping from the terminal clamp unless it is done intentionally.
- 20.5 The conducting part in contact with cable shall preferably be tinned or silver plated however Nickel plated copper or zinc plated steel shall also be acceptable.
- 20.6 The terminal blocks shall be of extensible design.
- 20.7 The terminal blocks shall have locking arrangement to prevent its escape from the mounting rails.
- 20.8 The terminal blocks shall be fully enclosed with removable covers of transparent, non-deteriorating type plastic material. Insulating barriers shall be provided between the terminal blocks. These barriers shall not hinder the operator from carrying out the wiring without removing the barriers.
- 20.9 Unless otherwise specified terminal blocks shall be suitable for connecting the following conductors on each side.
- | | |
|---------------------------------------|--|
| a) All circuits except CT/PT circuits | Minimum of two of 2.5 sq copper flexible. |
| b) All CT/PT circuits | Minimum of 4 nos. of 2.5 sq copper flexible. |
- 20.10 The arrangements shall be in such a manner so that it is possible to safely connect or disconnect terminals on live circuits and replace fuse links when the cabinet is live.
- 20.11 Atleast 20 % spare terminals shall be provided on each panel/cubicle/box and these spare terminals shall be uniformly distributed on all terminals rows.
- 20.12 There shall be a minimum clearance of 250 mm between the First/bottom row of terminal block and the associated cable gland plate for outdoor ground mounted marshalling box and the clearance between two rows of terminal blocks shall be a minimum of 150 mm.
- 20.13 The supplier shall furnish all wire, conduits and terminals for the necessary interphase electrical connections (where applicable) as well as

between phases and common terminal boxes or control cabinets. For equipments rated for 400 kV and above the wiring required in these items shall be run in metallic ducts or shielded cables in order to avoid surge overvoltages either transferred through the equipment or due to transients induced from the EHV circuits.

- 20.14 All input and output terminals of each control cubicle shall be tested for surge withstand capability in accordance with the relevant IEC Publications, in both longitudinal and transverse modes. The Contractor shall also provide all necessary filtering, surge protection, interface relays and any other measures necessary to achieve an impulse withstand level at the cable interfaces of the equipment.

21.0 LAMPS & SOCKETS

21.1 Sockets

All sockets (convenience outlets) shall be suitable to accept both 5 Amp & 15 Amp pin round Standard Indian plugs. They shall be switched sockets with shutters.

21.2 Hand Lamp:

A 240 Volts, single Phase, 50 Hz AC plug point shall be provided in the interior of each cubicle with ON-OFF Switch for connection of hand lamps.

21.3 Switches and Fuses:

- 21.3.1 Each panel shall be provided with necessary arrangements for receiving, distributing, isolating and fusing of DC and AC supplies for various control, signalling, lighting and space heater circuits. The incoming and sub-circuits shall be separately provided with miniature circuit breaker / switchfuse units. Selection of the main and Sub-circuit fuse ratings shall be such as to ensure selective clearance of sub-circuit faults. Potential circuits for relaying and metering shall be protected by HRC fuses.

- 21.3.2 All fuses shall be of HRC cartridge type conforming to IS:9228 mounted on plug-in type fuse bases. Miniature circuit breakers with thermal protection and alarm contacts will also be accepted. All accessible live connection to fuse bases shall be adequately shrouded. Fuses shall have operation indicators for indicating blown fuse condition. Fuse carrier base shall have imprints of the fuse rating and voltage.

22.0 Bushings, Hollow Column Insulators, Support Insulators:

- 22.1 Bushings shall be manufactured and tested in accordance with IS:2099 & IEC- 60137 while hollow column insulators shall be manufactured and tested in accordance with IEC-62155/IS:5621. The support insulators shall be manufactured and tested as per IS:2544/IEC-60168 and IEC-60273. The insulators shall also conform to IEC-60815 as applicable. The bidder may also offer composite hollow insulators, conforming to IEC-61462.
- 22.2 Support insulators, bushings and hollow column insulators shall be manufactured from high quality porcelain. Porcelain used shall be homogeneous, free from laminations, cavities and other flaws or imperfections that might affect the mechanical or dielectric quality and shall be thoroughly vitrified tough and impervious to moisture.
- 22.3 Glazing of the porcelain shall be uniform brown in colour, free from blisters, burrs and similar other defects.
- 22.4 Support insulators/bushings/hollow column insulators shall be designed to

have ample insulation, mechanical strength and rigidity for the conditions under which they will be used.

22.5 When operating at normal rated voltage there shall be no electric discharge between the conductors and bushing which would cause corrosion or injury to conductors, insulators or supports by the formation of substances produced by chemical action. No radio interference shall be caused by the insulators/bushings when operating at the normal rated voltage.

22.6 Bushing porcelain shall be robust and capable of withstanding the internal pressures likely to occur in service. The design and location of clamps and the shape and the strength of the porcelain flange securing the bushing to the tank shall be such that there is no risk of fracture. All portions of the assembled porcelain enclosures and supports other than gaskets, which may in any way be exposed to the atmosphere shall be composed of completely non hygroscopic material such as metal or glazed porcelain.

22.7 All iron parts shall be hot dip galvanised and all joints shall be air tight. Surface of joints shall be trued up porcelain parts by grinding and metal parts by machining. Insulator/bushing design shall be such as to ensure a uniform compressive pressure on the joints.

22.8 Tests

In bushing, hollow column insulators and support insulators shall conform to type tests and shall be subjected to routine tests in accordance with IS: 2099 & IS:2544 & IS : 5621.

23.0 MOTORS

Motors shall be "Squirrel Cage" three phase induction motors of sufficient size capable of satisfactory operation for the application and duty as required for the driven equipment and shall be subjected to routine tests as per applicable standards. The motors shall be of approved make.

23.1 Enclosures

- a) Motors to be installed outdoor without enclosure shall have hose proof enclosure equivalent to IP-55 as per IS: 4691. For motors to be installed indoor i.e. inside a box, the motor enclosure, shall be dust proof equivalent to IP-44 as per IS: 4691.
- b) Two independent earthing points shall be provided on opposite sides of the motor for bolted connection of earthing conductor.
- c) Motors shall have drain plugs so located that they will drain water resulting from condensation or other causes from all pockets in the motor casing.
- d) Motors weighing more than 25 Kg. shall be provided with eyebolts, lugs or other means to facilitate lifting.

23.2 Operational Features

- a) Continuous motor rating (name plate rating) shall be at least ten (10) percent above the maximum load demand of the driven equipment at design duty point and the motor shall not be over loaded at any operating point of driven equipment that will rise in service.
- b) Motor shall be capable at giving rated output without reduction in the expected life span when operated continuously in the system

having the particulars as given in Clause 15.0 of this Section.

23.3 Starting Requirements:

- a) All induction motors shall be suitable for full voltage direct-on-line starting. These shall be capable of starting and accelerating to the rated speed alongwith the driven equipment without exceeding the acceptable winding temperature even when the supply voltage drops down to 80% of the rated voltage.
- b) Motors shall be capable of withstanding the electrodynamic stresses and heating imposed if it is started at a voltage of 110% of the rated value.
- c) The locked rotor current shall not exceed six (6) times the rated full load current for all motors, subject to tolerance as given in IS:325.
- d) Motors when started with the driven equipment imposing full starting torque under the supply voltage conditions specified under Clause 15.0 shall be capable of withstanding atleast two successive starts from cold condition at room temperature and one start from hot condition without injurious heating of winding. The motors shall also be suitable for three equally spread starts per hour under the above referred supply condition.
- e) The locked rotor withstand time under hot condition at 110% of rated voltage shall be more than starting time with the driven equipment of minimum permissible voltage by at least two seconds or 15% of the accelerating time whichever is greater. In case it is not possible to meet the above requirement, the Bidder shall offer centrifugal type speed switch mounted on the motor shaft which shall remain closed for speed lower than 20% and open for speeds above 20% of the rated speed. The speed switch shall be capable of withstanding 120% of the rated speed in either direction of rotation.

23.4 Running Requirements:

- a) The maximum permissible temperature rise over the ambient temperature of 50 degree C shall be within the limits specified in IS:325 (for 3 - phase induction motors) after adjustment due to increased ambient temperature specified.
- b) The double amplitude of motor vibration shall be within the limits specified in IS: 4729. Vibration shall also be within the limits specified by the relevant standard for the driven equipment when measured at the motor bearings.
- c) All the induction motors shall be capable of running at 80% of rated voltage for a period of 5 minutes with rated load commencing from hot condition.

23.5 TESTING AND COMMISSIONING

An indicative list of tests is given below. Contractor shall perform any additional test based on specialities of the items as per the field Q.P./Instructions of the equipment Contractor or Purchaser without any extra cost to the Purchaser. The Contractor shall arrange all instruments required for conducting these tests alongwith calibration certificates and shall furnish the list of instruments to the Purchaser for approval.

- (a) Insulation resistance.

- (b) Phase sequence and proper direction of rotation.
- (c) Any motor operating incorrectly shall be checked to determine the cause and the conditions corrected.

ANNEXURE-A

CORONA AND RADIO INTERFERENCE VOLTAGE (RIV) TEST

1. General

Unless otherwise stipulated, all equipment together with its associated connectors, where applicable, shall be tested for external corona (for 400kV & above) both by observing the voltage level for the extinction of visible corona under falling power frequency voltage and by measurement of radio interference voltage (RIV) for 132kV and above.

2. Test Levels:

The test voltage levels for measurement of external RIV and for corona extinction voltage are listed under the relevant clauses of the specification.

3. Test Methods for RIV:

- 3.1 RIV tests shall be made according to measuring circuit as per International Special-Committee on Radio Interference (CISPR) Publication 16-1(1993) Part -1. The measuring circuit shall preferably be tuned to frequency with 10% of 0.5 Mhz but other frequencies in the range of 0.5 MHz to 2 MHz may be used, the measuring frequency being recorded. The results shall be in microvolts.
- 3.2 Alternatively, RIV tests shall be in accordance with NEMA standard Publication No. 107-1964, except otherwise noted herein.
- 3.3 In measurement of, RIV, temporary additional external corona shielding may be provided. In measurements of RIV only standard fittings of identical type supplied with the equipment and a simulation of the connections as used in the actual installation will be permitted in the vicinity within 3.5 meters of terminals.
- 3.4 Ambient noise shall be measured before and after each series of tests to ensure that there is no variation in ambient noise level. If variation is present, the lowest ambient noise level will form basis for the measurements. RIV levels shall be measured at increasing and decreasing voltages of 85%, 100%, and 110% of the specified RIV test voltage for all equipment unless otherwise specified. The specified RIV test voltage for 765kV, 400 kV, 220 KV is listed in the detailed specification together with maximum permissible RIV level in microvolts.
- 3.5 The metering instruments shall be as per CISPR recommendation or equivalent device so long as it has been used by other testing authorities.

- 3.6 The RIV measurement may be made with a noise meter. A calibration procedure of the frequency to which noise meter shall be tuned shall establish the ratio of voltage at the high voltage terminal to voltage read by noise meter.

4. Test Methods for Visible Corona

The purpose of this test is to determine the corona extinction voltage of apparatus, connectors etc. The test shall be carried out in the same manner as RIV test described above with the exception that RIV measurements are not required during test and a search technique shall be used near the onset and extinction voltage, when the test voltage is raised and lowered to determine their precise values. The test voltage shall be raised to 110% of specified corona extinction voltage and maintained there for five minutes. In case corona inception does not take place at 110%, test shall be stopped, otherwise test shall be continued and the voltage will then be decreased slowly until all visible corona disappears. The procedure shall be repeated at least 4 times with corona inception and extinction voltage recorded each time. The corona extinction voltage for purposes of determining compliance with the specification shall be the lowest of the four values at which visible corona (negative or positive polarity) disappears. Photographs with laboratory in complete darkness shall be taken under test conditions, at all voltage steps i.e. 85%, 100%, and 110%. Additional photographs shall be taken at corona inception and extinction voltages. At least two views shall be photographed in each case using Panchromatic film with an ASA daylight rating of 400 with an exposure of two minutes at a lens aperture of f/5.6 or equivalent. The photographic process shall be such that prints are available for inspection and comparison with conditions as determined from direct observation. Photographs shall be taken from above and below the level of connector so as to show corona on bushing, insulators and all parts of energised connectors. The photographs shall be framed such that test object essentially, fills the frame with no cut-off.

For recording purpose, modern devices utilizing UV recording methods such as image intensifier may also be used.

- 4.1 The test shall be recorded on each photograph. Additional photograph shall be taken from each camera position with lights on to show the relative position of test object to facilitate precise corona location from the photographic evidence.
- 4.2 In addition to photographs of the test object preferably four photographs shall be taken of the complete test assembly showing relative positions of all the test equipment and test objects. These four photographs shall be taken from four points equally spaced around the test arrangement to show its features from all sides. Drawings of the laboratory and test set up locations shall be provided to indicate camera positions and angles. The precise location of camera shall be approved by Purchaser's inspector, after determining the best camera locations by trial energisation of test object at a voltage which results in corona.
- 4.3 The test to determine the visible corona extinction voltage need not be carried out simultaneously with test to determine RIV levels.

- 4.4 However, both test shall be carried out with the same test set up and as little time duration between tests as possible. No modification on treatment of the sample between tests will be allowed. Simultaneous RIV and visible corona extinction voltage testing may be permitted at the discretion of Purchaser's inspector if, in his opinion, it will not prejudice other test.

5. Test Records:

In addition to the information previously mentioned and the requirements specified as per CISPR or NEMA 107-1964 the following data shall be included in test report:

- a) Background noise before and after test.
- b) Detailed procedure of application of test voltage.
- c) Measurements of RIV levels expressed in micro volts at each level.
- d) Results and observations with regard to location and type of interference sources detected at each step.
- e) Test voltage shall be recorded when measured RIV passes through 100microvolts in each direction.
- f) Onset and extinction of visual corona for each of the four tests required shall be recorded.

ANNEXURE-B

SEISMIC WITHSTAND TEST PROCEDURE

The seismic withstanding test on the complete equipment (for 132kV and above) shall be carried out along with supporting structure.

The Bidder shall arrange to transport the structure from his Contractor's premises/POWERGRID sites for the purpose of seismic withstand test only. The seismic level specified shall be applied at the base of the structure. The accelerometers shall be provided at the Terminal Pad of the equipment and any other point as agreed by the Purchaser. The seismic test shall be carried out in all possible combinations of the equipment. The seismic test procedure shall be furnished for approval of the POWERGRID.

SECTION-4				
S No.	PARTICULARS	765 KV	Yes/No	Remarks
1	Max. System Voltage (kV)	800kV		
2	Lightning Impulse withstand voltage of string with corona control rings (dry) (kVp)	± 2100		
3	Switching surge withstand voltage of string with corona control ring (wet) (kVp)	± 1550		
4	Power frequency withstand voltage of the complete string with corona control rings (wet (kVrms)	870		
5	Minimum total creepage distance of the insulator string (mm)	24800 (31mm/kV)		
6	Max. Radio Interference voltage in micro volts of string with corona control rings across 300 Ohms resistor at 1 Mhz	1000(Max.) at 508kV		
7	Minimum Corona Extinction Voltage level of string with corona control rings (dry (kV rms)	508		
8	Ball and sockets designation of the Insulator string in mm	24		
9	Hot dip galvanizing	As per IS 2633/2629		
10	Electro mechanical strength of composite long rod insulator unit in (kN)	210		
11	All applicable accessories of guy wire arrangement as per note sl. No. 3 of cl. No. 1.3 of section -1 included in bidder scope			
12	Powergrid standard approved valid drawings are available			
13	Valid Powergrid standard type test approval of 765kV composite long rod polymer insulators string with hardware fittings (Yes /No)			
14	If Powergrid Approval is not available, . Bidder shall submit valid type test reports and if Type test reports are not accepted bidder shall conduct typ test free of cost. (free of cost/ Chargeable)			
15	Powergrid approved valid standard quality Plan (Please enclose SMQP) (mention date of validity)			
16	Documentary proof documents for qualifying requirements of 765kV composite long rod polymer Insulator string as per cl. No. 1.6 of section -1 attached (yes/No)			

Signature of Authorised signatory with company seal

ANNEXURE - A
SCHEDULE OF TECHNICAL DEVIATIONS

Bidder shall list below all technical deviation clause wise w.r.t. tender specifications:

S.No.	Page No.	Clause No.	Deviation	Reason / Justification
-------	----------	------------	-----------	------------------------

Any deviation not specifically brought out in this section shall not be admissible for any commercial implication at later stage. Except to the technical deviations listed in this schedule, bidder's offer shall be considered in full compliance to the tender specifications irrespective of any such deviation indicated / taken elsewhere in the submitted offer.

Date:

Tenderer's Stamp & Signature