



BHARAT HEAVY ELECTRICALS LIMITED
TRANSMISSION BUSINESS ENGINEERING MANAGEMENT
NEW DELHI

DOCUMENT No.	TB-394-510-130A	Rev	00	Prepared	Checked	Approved
CUSTOMER Doc. No.		NAME	RD	RD	VK	
TYPE OF DOC.	TECHNICAL SPECIFICATION	SIGN				
TITLE	MARSHALLING KIOSK	DATE	12/11/12		18/11/12	
	(AC JUNCTION BOX & DC INTERLOCK BOX)	GROUP		TBEM		
		W.O. No		86009		
CUSTOMER	Tamilnadu Transmission Corporation Limited (TANTRANSCO)					
PROJECT	765/400kV AIS S/S Ariyalur					

List of Contents	No. of Pages
Cover Sheet	01
Section 1 Scope, Specific technical Requirements & Quantities	03
Section 2 Equipment Specification	04
Section 3 General Technical Requirement	16
Section 4 Guaranteed Technical Particulars	01
Section 5 Check List	05

Rev.	Date	Altered	Checked	Approved	REVISION DETAILS
Distribution				CUSTOMER	TBMM O/C
				-	

COPYRIGHT & CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF BHARAT HEAVY ELECTRICALS LIMITED
THIS MUST NOT BE USED DIRECTLY OR INDIRECTLY IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY

SECTION – 1

SCOPE, SPECIFIC TECHNICAL REQUIREMENT AND QUANTITIES

1. SCOPE

This technical specification covers the requirements of design, manufacture, testing at works, packing and dispatch of **AC Junction Box (AC Power distribution Box) and DC Inter-lock Box.**

The offered equipment shall also comply with the General Technical Requirements for the project as detailed under section-3 of this specification. For environmental conditions, refer Section-3 carefully.

The specification comprise of following sections:

Section-1: Scope, Specific Technical Requirements & Bill of Quantities.

Section-2: Equipment Specifications

Section-3: General Technical Requirements

Section-4: Guaranteed Technical Particulars

Section-5: Check List

In case of any conflict between various sections, order of precedence shall be in the same order as listed above.

Note: The term 'Owner' appearing in this specification shall refer to TANTRANSCO, the term 'Purchaser' shall refer to BHEL and the term 'Contractor' shall refer to the successful Bidder.

The equipment is required for the following project:

Name of Customer: Tamilnadu Transmission Corporation Limited (TANTRANSCO)

Name of the Project: 765/400kV AIS S/S Ariyalur

Refer Section - 3 for Project Details and General Specifications.

2. SPECIFIC TECHNICAL REQUIREMENTS

For detailed equipment specification of AC Junction Box and DC Inter-lock Box, refer to Section -2 of the document.

AC Junction Box and DC Inter-lock Box shall be made of FRP material duly painted and fitted with necessary hardware.

Constructional Features:

1. Construction Details:-

(a) All sheet thickness along with canopy:	Minimum 3 mm thk FRP material
(b) Mounting Plate Thickness:	2.00 mm thk. CRCA sheet
2. Protection Class:	IP56 with Canopy
3. Painting (Smooth Finish):	
External:	IS-5: 697
Internal:	Glossy white
4. Installation:	Outdoor
5. Cable Entry:	Bottom

3. BILL OF QUANTITIES

S. No	DETAILS	Unit	Quantity
1.	AC Junction Box (FRP) (FRP Type AC Power Distribution Box for Outdoor Switchyard Equipments as per Specification given in section-1 and 2)	Nos.	32
2.	DC Inter-Lock Box (FRP) (FRP type with 200 way TBs)	Nos.	32

Note:

1. Fixing Hardware (Nuts, Bolts and Washers) for mounting JB's and Interlock Boxes are deemed to be included in the equipment price.
2. Base frames are to be provided for all the Boxes for mounting on the trenches.
3. The above quantities are subject to change by $\pm 30\%$ at tender stage and $\pm 10\%$ at contract stage.

4. TYPE TESTING

All the tests as per relevant IS/IEC shall be carried out and reports to be submitted.

The Type Test for offered equipments/materials used for this project should have been conducted in any approved Government/Govt. recognized laboratories conforming to latest IS/IEC. The above type test certificates should accompany the drawings of the materials equipments, duly signed under seal by the Institution, who have issued the type test certificate.

The above type test should have been conducted not earlier than 5 (five) years prior to 30.09.2016.

The original type test certificates shall be furnished for verification.

Non furnishing of type test certificates by the tenderers, will be liable for rejection.

In case type test reports are more than five years old (from **30.09.2016**) or the reports of type tests are found to be technically unacceptable to end customer, the type test shall be conducted by the vendor without cost and delivery implication to BHEL.

5. TECHNICAL QUALIFYING REQUIREMENT

The manufacturer should have manufactured, Type tested and supplied Junction Boxes of same or higher size to any of the 420KV, 245kV or 132 kV Switchyards of Electricity Boards/Power Utilities in India during the last five years from the date of bid opening.

6. QUALITY PLAN

Bidder to follow valid TANTRANSCO approved Quality Plan as per TANTRANSCO procedure. In case the bidder doesn't have approved QP, it will be the bidder's responsibility to get its QP approved directly from the ultimate customer.

Project: 765/400kV Ariyalur Substation

Customer: TANTRANSCO

Technical Specification: AC JUNCTION BOX & DC INTERLOCK BOX

Bharat Heavy Electricals Limited

Doc. No. TB-394-510-130A

SECTION – 2

EQUIPMENT SPECIFICATION

As per TAN TRANSCO SPECIFICATION ENCLOSED HERE IN

~~ANNEXURE-I (SECTION-2)~~
~~SECTION-18~~

AC & DC JUNCTION BOX (FRP)

INTERLOCK JUNCTION BOX

1.0 Fibre reinforced plastic junction boxes to be supplied with the following provisions. One no. of bay marshalling kiosk shall be provided for each bay, Tie breaker for AC supply to Isolators and Breaker etc.,

1.1 AC JUNCTION BOX : (At each Kiosk)

i) To receive incoming 415V, 3 phase, 63 Amps, AC supply with MCB unit and distribute minimum six numbers 32 Amps 3ph and 16 Nos 16 A 1ph AC supplies controlled by MCB. The MCB's provided shall have additional aux contacts in order to have alarm report in SAS in the event of tripping.

ii) Bus arrangement for Supply Distribution

iii) Lighting arrangement for the Kiosk

iv) Aux supply for fire alarm system

v) 1 No 15A Single phase Socket.

vi) The degree of protection should be IP56.

220 V DC JUNCTION BOX : (At each Kiosk) N.A.

i) Two separate junction boxes for 220 V DC I and DC II to be fed from two different 220V DC Battery sources with MCB units and distribute minimum 14 Nos. 16 A supplies controlled by MCB from each distribution box.

ii) The MCB's provided shall have additional aux contacts in order to have alarm in SAS in the event of tripping.

48 V DC JUNCTION BOX : (At each Kiosk) N.A.

To receive 48V DC incoming with MCB and distribute minimum six nos 16A supplies controlled by MCB.

1.2

DC INTER-LOCK BOX

One number for each feeder, Tie breaker

i) 200 nos. terminal blocks in vertical formation for interlocking facilities to be wired using 2.5 Sq.mm multistrand copper wire and terminated using suitable lugs. Identification ferrules and bus trunking to be provided where ever necessary.


(4 NOS. TB STRIPS TO BE PROVIDED)

Lighting arrangement for the Kiosk

2.0

All the materials should be of reputed make. The box should be wired neatly using 2.5 Sq.mm copper wire. Terminal blocks with stud type to be provided for termination incoming and out going lines.

- a) The contractor shall supply and install junction boxes complete with terminals as required. The brackets, bolts, nuts, screws etc. required for erection are also included in the scope of the contractor.
- b) Junction boxes having volume less than 1600 cubic centimeters may be installed without any support other than that resulting from connecting conduits where two or more rigid metallic conduits enter and accurately position the box. Boxes shall be installed so that they are level, plumb and properly aligned to present a pleasing appearance.
- c) Boxes with volumes equal to or greater than 1600 cubic cm, and smaller boxes terminating on less than rigid metallic conduits or for other reasons not rigidly held, shall be adequately supported by auxiliary steel of standard steel shapes or plates to be fabricated and installed. The contractor shall perform all drilling, cutting, welding, shimming and bolting required for attachment of supports.
- d) For both front and rear door Hinges with locking arrangements to be provided.
- e) The degree of protection should be IP56.

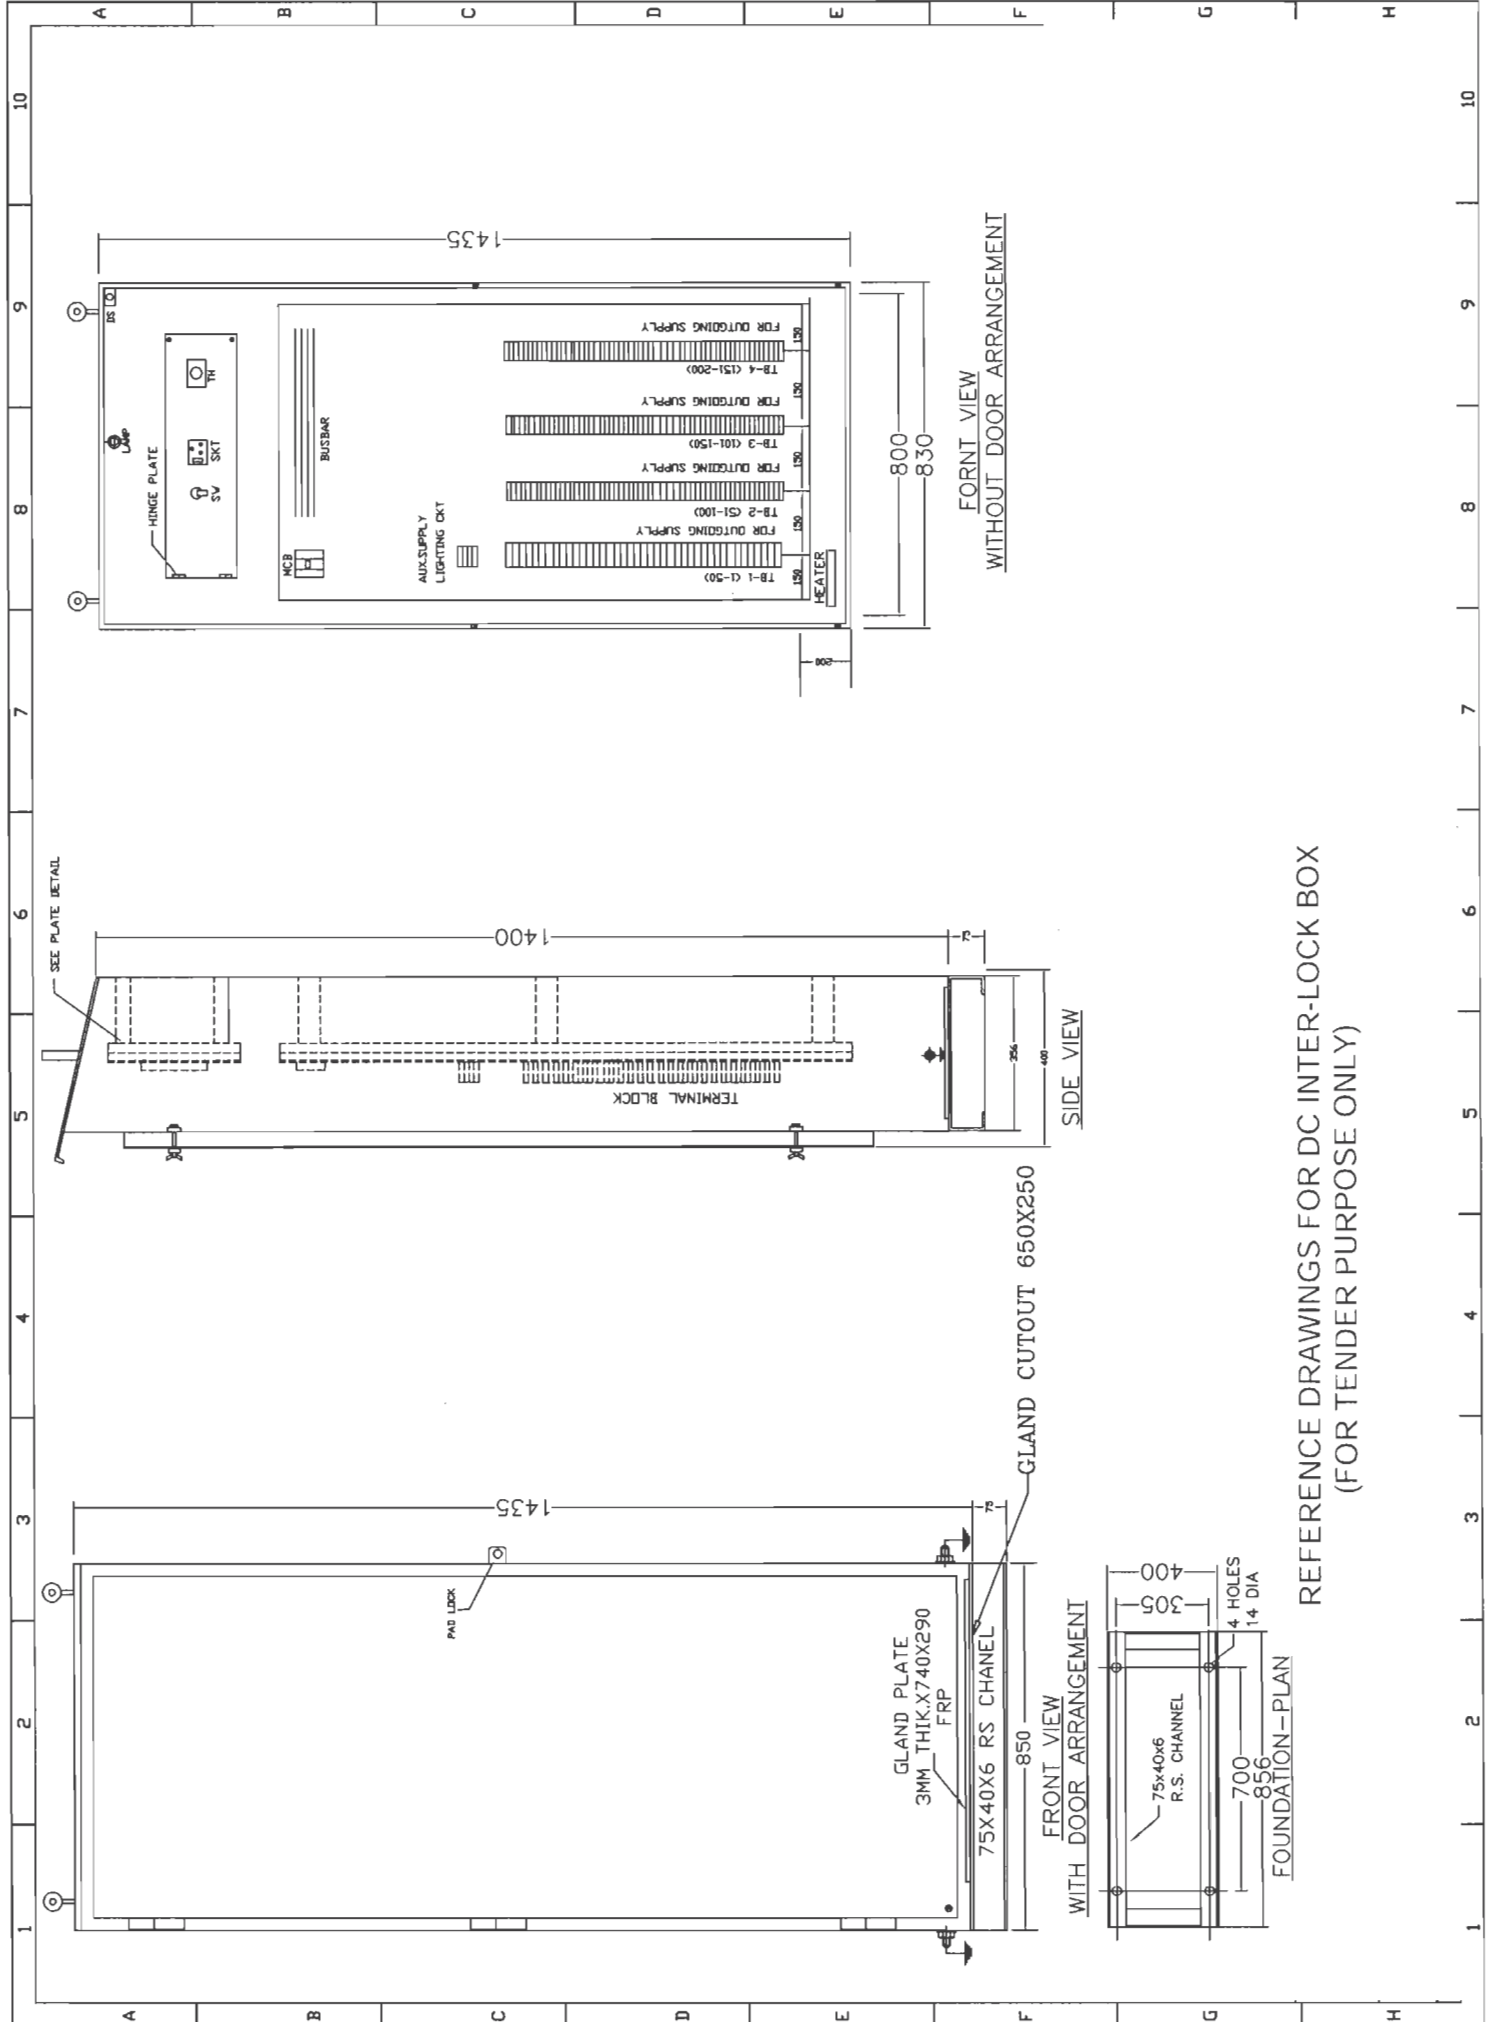

REFERENCE DRAWINGS FOR DC INTER-LOCK BOX
(FOR TENDER PURPOSE ONLY)

SECTION – 3

GENERAL TECHNICAL REQUIREMENTS

3.0 FOREWORD

The provisions under this section are intended to supplement general requirements for the materials, equipment's and services covered under other sections.

3.1 PROJECT INFORMATION AND SYSTEM PARAMETERS

- a) Customer : M/s Tamil Nadu Transmission Corporation Limited
- b) Project Title : 765/400KV AIS SUB STATION AT ARIYALUR
- c) Transport facilities : Road/Rail

Physical and other parameters:

3.1.1 Location of the substation

- 3.1.2 Nearest Railway station : Tindivanam
Railway : Southern Railway

3.1.3 Meteorological data

- (i) Atmosphere : Polluted
- (ii) Maximum ambient temperature : 50°C
- (iii) Minimum ambient temperature : 20°C
- (iv) Maximum daily average ambient air temperature : 45° C
- (v) Maximum yearly average ambient air temperature : 32° C
- (vi) Maximum Humidity (%) : 100%
- (vii) Average thunder storm days per annum : 50
- (viii) Average rainy days per annum : 65
- (ix) Average annual rainfall (mm) : 750 mm
- (x) No. of months during which tropical monsoon condition prevail : 3
- (xi) Maximum wind pressure : 150 Kgf/Sqmm
- (xii) Altitude above MSL : <1000M

(xiii) Basic Wind Speed

: 47 m/s (Zone -4)

However for design purpose, ambient temperature should be considered as 50° C and relative humidity as 100%.

3.1.4 System Parameter

SL No	Description of parameters	765kV System	400 kV System
1.	System operating Voltage	765kV	400k V
2.	Maximum operating voltage of the system(rms)	800kV	420k V
3.	Rated Frequency	50HZ	50H
4.	Number of Phases	3	3
5.	Rated Insulation Levels (i)Full wave impulse withstand voltage.(1.2 to 50 micro sec) (ii)Switching impulse withstand voltage(250/2500 micro sec) dry and wet. (iii) One minute power frequency dry withstand voltage (rms)frequency dry withstand voltage (rms)	2100kVp 1550kVp 830kV	1550kVp 1050kVp 630kV
6.	Corona extinction voltage	508kV	320kV
7.	Max. radio interference voltage for frequency between 0.5 MHz and 2 MHz at 508 kV rms for 765kV, and 266kV rms for 400kV system	2500 microvolts	1000 microvolts
8.	Minimum creepage distance (25mm/kV)	20000 mm	10500 mm
9.	Rated short circuit current for 1 sec. Duration	50kA	63kA
10.	System neutral earthing	Effectively earthed	Effectively earthed
11.	Seismic acceleration	0.3g horizontal	0.3g horizontal
12.	Plinth level of switchyard	500mm above FGL	500mm above FGL

3.1.5 AUXILIARY POWER SUPPLY:

Auxiliary electrical equipment's maintenance equipment's etc., shall be suitable for operation on the following supply system.

3 phase AC Supply	415V, 3 phase 4 wire 50 Hz, neutral grounded AC supply -10% to +10%, frequency +/- 5%
1 phase AC supply	240V, single phase, 50 Hz neutral grounded AC supply
DC supply	220, 2 wire DC supply + 10% to -15%, Ungrounded 48V, 2 wire DC supply , Positively earthed

3.2 GENERAL REQUIREMENT

3.2.0 ALL THE EQUIPMENTS / MATERIALS TO BE SUPPLIED SHOULD BE IN ACCORDANCE WITH RELEVANT LATEST / AMENDED IS/IEC, WHETHER IT HAS BEEN SPECIFICALLY MENTIONED IN THE SPECIFICATION OR NOT.

3.2.1 The bidder shall also furnish drawings for the following:

All EQUIPMENTS and type of clamps, fittings hardware's, insulators, bus bar. These designs / drawing shall be got approved by the purchaser before commencing the manufacture / construction / erection and are to be as per latest IS /IEC.

3.2.2 GENERAL:

The bidder shall be fully responsible for providing all equipment, materials system and services specified or otherwise which are required to complete the construction and successful commissioning of the substation in all respects.

Any other items not specifically mentioned in the specification but which are required for erection of materials/equipment under the scope of work, testing and commissioning are deemed to be included in the scope of the specification unless specifically excluded.

All items shall be supplied as per schedule and as specified in the relevant Indian standard of latest revision. The Technical specification of the main materials/equipment is furnished. The Technical specification contained herein for the materials are for the guidance of the tenderer.

The bidders are requested to procure the equipment's/materials/component only from reputed /qualified manufacturer as per Technical requirement stipulated in Section - I of Technical specifications. Approval of make of item shall be taken up by vendor from TANTRANSCO himself.

3.3 SPECIFIC REQUIREMENT

The bidder shall furnish make/manufacturer, catalogues, engineering data, technical information, design documents, drawings etc., fully in conformity with the technical specification and get approval from competent authority before commencement of any work.

All steel materials, other than materials for earthing should be of galvanized if not specified.

3.4 STANDARD:

The works covered by the specification shall be designed, engineered, manufactured, built, tested and commissioned in accordance with the Acts, Rules, Laws and Regulations of India.

The equipment to be furnished under this specification shall conform to latest issue with all amendments (as on the date of bid opening) of standards specified in each section.

The Bidder shall note that standards mentioned in the specification are not mutually exclusive or complete in themselves, but intended to compliment each other.

The Bidder shall also note that list of standards presented in this specification is not complete. Whenever necessary the list of standards shall be considered in conjunction with specific IS/IEC. When the specific requirements stipulated in the specifications exceed or differ than those required by the applicable standards, the stipulation of the Specification shall take precedence.

3.5 TYPE TEST:

The Type Test for all the equipments/materials used for this project should have been conducted in any approved Government/Govt. recognized laboratories conforming to latest IS/IEC. The above type test certificates should accompany the drawings of the materials equipments, duly signed under seal by the Institution, who have issued the type test certificate. ~~The above type test should have been conducted not earlier than Ten years, subject to no change in design as on the originally scheduled date of technical bid opening i.e. 30.09.2016~~

~~In case the type tests were conducted earlier than 10 (ten) years prior to the originally scheduled date of bid opening, the contractor shall repeat these test (s) at no extra cost to the purchaser.~~

~~However, in case of instrument transformers, the following type tests should have been conducted within 5 (five) years prior to the originally scheduled date of bid opening.~~

- ~~i) Lightning Impulse Test~~
- ~~ii) Switching Impulse Test~~
- ~~iii) Multiple Chopped Impulse Test (For CT)~~
- ~~iv) Chopped Impulse Test (For CVT)~~

~~In case the test reports are of these tests (for instrument transformers) as mentioned above are conducted earlier than 5 (five) years prior to the originally scheduled date of bid opening, the contractor shall repeat these test(s) at no extra cost to the BHEL. The original type test certificates shall be furnished for verification on request.~~

~~TANTRANSCO/BHEL reserves the right to demand repetition of some or all the type tests in the presence of purchaser's representative at no extra cost.~~

~~Non furnishing of type test certificates by the tenderers, will be liable for rejection.~~

3.6 MATERIALS AND WORKMANSHIP:

All the materials shall be of the best class and capable of satisfactory operation in the tropics with humid atmosphere conditions. Unless otherwise specified, they shall conform to the requirements of the appropriate ISS/IEC. The workmanship shall be of the best grade and the entire construction in accordance with the best modern practice.

The equipment shall be designed to facilitate inspection and repairs and to ensure satisfactory operation under atmosphere condition prevailing at site and under such sudden variation of load and voltage as may be met with under working conditions in the system including those due to faulty synchronizing and short circuit within the rating of the apparatus.

The design shall incorporate every reasonable precaution and provision for the safety of all those concerned in the operation and maintenance of the equipment.

All the equipment's should operate without undue vibration and with the least practicable amount of noise.

3.7 INSPECTION :

The inspection may be carried out by the TANTRANSCO/BHEL at any stage of manufacture. The supplier shall grant free access to TANTRANSCO's/BHEL representative at a reasonable time when the work is in progress. The TANTRANSCO/BHEL shall have access at all times to the works and all other places of manufacture/fabrication, where the equipments are being manufactured/fabricated and the bidder shall provide TANTRANSCO's/BHEL representative all facilities for unrestricted inspection of the works, raw materials, manufacture of all the accessories and for conducting necessary tests.

Inspection and acceptance of any equipment under this specification by the TANTRANSCO/BHEL shall not relieve the supplier of his obligation of furnishing equipment in accordance with the specification and shall not prevent subsequent rejection if the equipment is found to be defective. The supplier shall keep the TANTRANSCO/BHEL informed in advance, about the manufacturing programme so that arrangement can be made for inspection.

The TANTRANSCO/BHEL, reserves the right to insist for witnessing the acceptance/routine testing of the bought out items. No material shall be dispatched from its point of manufacture unless the material has been satisfactorily inspected and tested.

The correct grade and quality of steel shall be used by the supplier. To ascertain quality of steel, the TANTRANSCO/BHEL may at his discretion get the material tested at an approved laboratory.

The bidder shall take an account the fabrication wastage while quoting the rates. The Employer will not accept any liability in connection with the wastage of steel during fabrication or otherwise. Steel shall be procured exclusively from the main producers. However, sections not rolled by main produces can be procured from reroller, provided rerolling of structural steel section is done from billets/ingots of tested quality. Rerolled sections are duly tested as per relevant standards. Supplier should obtain approval of list of primary producers of Steel and Zinc before Proto assembly.

The BHEL/TANTRANSCO or his representative shall have the right to inspect and/or test the goods /works to confirm their conformity to the supplier. BHEL/TANTRANSCO shall notify the supplier in writing of the identity of any representatives authorized for these purposes.

The inspections and tests may be conducted on the premises of the supplier or his Sub vendor at the point of delivery and /or at the goods' final destination. Where tests are conducted in the premises of Supplier, all reasonable facility and assistance including access to drawings and production data shall be furnished at no charge to the BHEL.

Should any inspected or tested goods fail to conform to specifications, the BHEL/TANTRANSCO may reject them and the supplier shall either replace the rejected goods or make all alterations necessary to meet specification requirements free of cost to the BHEL/TANTRANSCO within one week of intimation.

The BHEL/TANTRANSCO's right to inspect, test and where necessary reject the goods after the goods; arrival at the site, shall in no way be limited or waived by reason of the goods having been previously inspected. Tested and passed by the BHEL/TANTRANSCO or his representative prior to the goods dispatch.

Not less than 15 (Fifteen) days advance intimation shall be given about the quantity of materials that will be ready for inspection by the officers of TANTRANSCO/ BHEL/Third agency authorized by the Corporation. The materials should not be dispatched without instruction from the Corporation.

3.8 GUARANTEE:

The supplier shall guarantee that the goods under the Contract are new, unused of the most recent or current models and incorporated all recent improvements in design and materials unless provided otherwise in the Contract. The supplier shall further guarantee that the goods supplied under this Contract shall have no defects arising from design, materials or workmanship, installation and erection, if that may develop under normal use of the supplied goods. The supplier shall also guarantee the performance of the works executed by him including the performance of all the materials/goods supplied by him.

BHEL shall promptly notify supplier in writing of any claims arising under guarantee in respect of goods. Upon receipt of such notice, the supplier shall, with all reasonable speed, repair or replace the defective works or parts thereof, free of cost at site. All the expenses towards transportation of defective parts to supplier's works and of repaired/replaced parts to site shall be borne by the Supplier.

If the Supplier, having been notified, fails to remedy the defects within 14 days, the BHEL will proceed to take such remedial action as may be necessary, at the supplier's risk and expenses. All expenses in this regard will be recovered from Supplier.

3.9 PRE COMMISSIONING TESTING (if applicable) :-

On completion of erection of equipment's and before charging each item of equipment's shall be thoroughly cleaned and inspected jointly by the TANTRANSCO and the BHEL for correctness and completeness of installation and acceptability for charging leading to initial pre commissioning test. The pre commissioning testing to be carried all equipment's in the presence of BHEL/ TANTRANSCO. Necessary tools, testing kits to be arranged by the Supplier.

3.10 DOCUMENTATION : All drawings shall conform to relevant international standards Organization (ISO) specification. All drawings shall be in ink and suitable for micro filming. All dimensions and data shall be in S.I. units.

3.11 PAINTING, GALVANISING:

All interiors and exteriors of all metal parts shall be thoroughly cleaned to remove all rust, scales, corrosion, greases or other adhering foreign matter and the surfaces treated by phosphating (e.g. seven tank phosphating sequences).

All metal surfaces exposed to atmosphere shall be given, in addition to the treatment, two primer coats of zinc chromate and two coats of epoxy paint with epoxy base thinner. All metal parts not accessible for painting shall be made of corrosion resisting material. All machine finished or bright surfaces shall be coated with a suitable preventive compound and suitably wrapped or otherwise protected. All paints shall be carefully selected to withstand tropical heat and extremes of weather within the limits specified. The paint shall not scale off or wrinkle or be removed by abrasion due to normal handling. All external paintings shall be as per shade **No.697/631 of IS-5**.

Paint inside the metallic housing shall be of anti condensation type and the paint on outside surfaces shall be suitable for outdoor installation.

All components shall be given adequate treatment of climate proofing as per **IS: 3202** so as to withstand corrosive and several service conditions.

All ferrous parts including all sizes of nuts, bolts, support channel structures, etc. as also the mechanism housing shall be hot dip galvanized conforming to latest version of IS : 2629 or epoxy painted. Spring washers shall be electro-galvanised.

All members of the structure members shall be hot dipped galvanised with a zinc coating of **610 gms. per square metre** . Galvanising shall be done after a work is completed, except that the nuts may be tapped or rerun after galvanization. The zinc coating shall be smooth, clean, of uniform thickness and free from defects. The preparation for galvanising itself shall not adversely affect the mechanical properties of the coated materials. The employer shall be at liberty to have the samples of zinc used, test checked in any laboratory at his own cost and reject the particular supply if it is below standard.

All galvanised material shall withstand test as per IS 2633-1972 or any other equivalent standard. The zinc used for galvanising fabricated material shall be of high grade Electrolytic zinc of 99.99% purity.

All nuts and pins shall be adequately locked. Nuts, bolts and pins used inside the transformer and tap-changer compartment where gaskets are not used shall be provided with spring washers or locknuts. Where galvanizing is specified, it shall be applied by the hot dipped process or by electro-galvanizing process and for all parts, other than steel wires, shall consist of a thickness of zinc coating equivalent to not less than 610gm of zinc per square meter of surface. The zinc coating shall be smooth, of uniform thickness and free from defects.

3.12 SURFACE FINISH

All interiors and exteriors of tanks, control cubicles and other metal parts shall be thoroughly cleaned to remove all rust, scales, corrosion, greases or other adhering foreign matter. All steel surfaces in contact with insulating oil as far as accessible, shall be painted with not less than two coats of heat resistant, oil insoluble, insulating paints.

All metal surfaces exposed to atmosphere shall be given two primer coats of zinc chromate and two coats of epoxy paint with epoxy base thinner. All metal parts not accessible for painting shall be made of corrosion resisting material. All machine finished or bright surfaces shall be coated with a suitable preventive compound and suitably wrapped or otherwise protected. All paints shall be carefully selected to withstand tropical heat and extremes of weather within the limit specified. The paint shall not scale off or wrinkle or be removed by abrasion due to normal handling.

3.13 PROTECTION

All coated surfaces shall be protected against abrasion, impact, discoloration and any other damages. All exposed threaded portions shall be suitably protected with either a metallic or a non-metallic protecting device. All ends of all valves, pipings and conduit equipment connections shall be properly sealed with suitable devices to protect them from damage.

All equipment accessories and wiring shall have fungus protection, involving special treatment of insulation and metal against fungus, insects and corrosion. The parts which are likely to get rusted, due to exposure to weather should also be properly treated and protected in a suitable manner. Screens of corrosion resistant material shall be furnished on all ventilating louvers to prevent entry of insects.

3.14 FUNGI-STATIC VARNISH

Besides the space heaters, special moisture and fungus resistant varnish shall be applied on the parts, which may be subjected or predisposed to the formation of fungi due to the presence or deposit of nutrient substances. The varnish shall not be applied to any surface of part where the treatment will interface with the operation or performance of the equipment. Such surfaces or parts shall be protected against the application to the varnish.

3.15 DEGREE OF PROTECTION

The supplier shall propose following Degree of protection for those equipment/Items for which the degree of protection has not been specified in the specification for the approval of BHEL/TANTRANSCO. The decision of BHEL/TANTRANSCO shall be final. The enclosures of the Control Cabinets, Junction boxes and Marshalling boxes panels etc to be installed shall be provided with degree of protection as detailed here under:

- a) Installed outdoor: IP-55
- b) Installed indoor in air conditioned area: IP-42
- c) Installed in covered area IP:52
- d) For LT switchgear (AC & DC distribution Boards): IP-54

The degree of protection shall be in accordance with IS:13947, (Part-1)/IEC-947(Part-1). Type test report/or degree of protection test on each type of the box shall be submitted for approval.

3.16 RATING PLATES, NAME PLATES AND LABELS:-

The equipment's shall be provided with a rating plate or plates marked with but not limited to following data whatever needs to that particular equipment's.

- (a) Manufacturer's name or trade mark.
- (b) Serial number and type design making it possible to get all relevant information from the manufacturer.
- (c) Year of manufacture.
- (d) Rated voltage
- (e) Rated insulation level.
- (f) Rated frequency
- (g) Rated Normal current.
- (h) Rated short circuit breaking current
- (i) First pole to clear factor
- (j) Rated duration of short circuit
- (k) Rated auxiliary D.C. supply voltage of closing and opening devices.
- (l) Rated pressure of SF6 gas for operation and interruption.
- (m) Rated out of phase breaking current.
- (n) Rated supply voltage of auxiliary circuit.
- (o) Rated supply frequency of auxiliary circuits.
- (p) Purchase Order Number and Date.

The rating plate shall be visible in position of normal service and installation.

The rating plate shall be weather proof and corrosion proof.

Type or serial number together with details of the loading conditions under which the item of the substation in question has designed to operate and such diagram plates as may be required by the BHEL/TANTRANSCO. The rating plate for each equipment shall be according to IEC requirements.

Alternately two separate plates one with Hindi and other with English inscriptions may be provided. During approvals drawings of Rating/name plates/labels shall also be submitted.

3.17 EARTHING:

The operating mechanism housing, control cabinets, support structure etc. shall be provided with two separate earthing terminals suitable for bolted connection to 50x8mm mild steel flat to be provided for connection to station earth mat.

Circuit breakers, LA, Isolator, CVT, CT, BPI shall be provided with two grounding pads suitable for connection to galvanized steel flat of Size 75X12 mm. Control panels, Relay panel, outdoor marshalling boxes, Junction boxes, Lighting panels and distribution board shall be provided with two grounding pads, for connection to galvanized steel flat. The two pads shall be provided, one each at the middle of the two opposite sides of the bottom frame of the equipment. Earthing of hinged door shall be done by using a separate earth wire.

3.18 TERMINAL BLOCKS AND WIRING

Control and instrument leads from the switchboards or from other equipment will be brought to terminal boxes or control cabinets in conduits. All Inter-phase and external connections to equipment or to control cubicles will be made through terminal blocks.

Terminal blocks shall be 1100 V grade and have continuous rating to carry the maximum expected current on the terminals. Those shall be of moulded piece complete with insulated barriers stud type terminals, washers, nuts and lock nuts. Screw clamp, overall insulated, insertion type, rail mounted terminals can be used in place of stud type terminals. But preferably the terminal blocks shall be non-disconnecting stud type equivalent to Elmex type CATM4, Phoenix cage clamp type of Wedge or equivalent. The Insulating material of terminal block shall be nylon 6.6 which shall be free of halogens, fluorocarbons etc.

Terminal block for current transformer and voltage transformer secondary leads shall be provided with test links and isolating facilities. The current transformer secondary leads shall also be provided with short circuiting and earthing facilities.

The terminal shall be that maximum contact area is achieved when a cable is terminated. The terminal shall have a locking characteristic to prevent cable from escaping from the terminal clamp unless it is done intentionally. The conducting part in contact with cable shall preferably be tinned or silver plated however Nickel plated copper or zinc plated steel shall also be acceptable. The terminal blocks shall be of extensible design. The terminal blocks shall have locking arrangement to prevent its escape from the mounting rails.

The terminal blocks shall be fully enclosed with removable covers of transparent, non-deteriorating type plastic material. Insulating barriers shall be provided between the terminal blocks. These barriers shall not hinder the operator from carrying out the wiring without removing the barriers.

Unless otherwise specified terminal blocks shall be suitable for connecting the following conductors on

each side.

All circuits except CT circuits :	Minimum of 2 nos. of 2.5 sq.mm.copper flexible.
All CT circuits :	Minimum of 4 nos. of 2.5 sq.mm, copper flexible.

The arrangements shall be in such a manner so that it is possible to safely connect or disconnect terminals on live circuits and replace fuse links when the cabinet is live. At least 20 % spare terminals shall be provided on each panel/cubicle/box and these spare terminals shall be uniformly distributed on all terminals rows.

There shall be a minimum clearance of 250mm between the first bottom row of terminal block and the associated cable gland plate. Also the clearance between two rows of terminal blocks shall be a minimum of 150 mm. The Supplier shall furnish all wire, conduits and terminals for the necessary inter-phase electrical connection (where applicable) as well as between phases and common terminal boxes or control cabinets.

All input and output terminals of each control cubicle shall be tested for surge withstand capability in accordance with the relevant IEC Publications, in both longitudinal and transverse modes. The supplier shall also provide all necessary filtering, surge protection, interface relays and any other measures necessary to achieve an impulse withstand level at the cable interfaces of the equipment.

TB sizes for incoming power supply shall be informed/confirmed during drawing approval stage.

3.19 CONTROL CABINETS, JUNCTION BOXES, TERMINALS BOXES AND MARSHALLING BOXES FOR OUTDOOR EQUIPMENTS

All types of boxes, cabinets etc. shall generally conform to and be tested in accordance with IS-5039, IS-8623 or IEC-439, as applicable and the clause given below.

Control cabinet, Junction boxes, Marshalling boxes & Terminal boxes shall be made of sheet steel. Sheet steel used shall be at least 2.0 mm thick cold rolled or 2.5 mm hot rolled. The box shall be properly braced to prevent wobbling. There shall be sufficient reinforcement to provide level surfaces, resistance to vibrations and rigidity during transportation and installation. Cabinet/boxes shall be free standing floor mounting type, wall mounting type or pedestal mounting type as per requirements.

Cabinet /boxes shall be provided with double hinged doors with padlocking arrangements. The distance between two hinges shall be adequate to ensure uniform sealing pressure against atmosphere. The quality of gaskets shall be such that it does not get damaged/cracked during the operation of the equipment.

All door, removable covers and plates shall be gasketed all around with suitably profiled Neoprene /EPDM gaskets. The gasket shall be tested in accordance with approved quality plan. The quality of gasket shall be such that it does not get damaged /cracked during the years of the equipment or its major overhaul whichever is earlier. All gasketed surfaces shall be smooth, straight and reinforced if necessary

to minimize distortion and to make a tight seal. Ventilating Louvers, if provided, shall have screen and filters. The screen shall be fine wire mesh made of brass.

All boxes/cabinets shall be designed for the entry of cables from bottom by means of weather proof and dust-proof connections. Boxes and cabinets shall be designed with generous clearances to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the box or cabinet. Suitable cable gland plate projecting at least 150 mm above from the base of the Marshalling Kiosk/box shall be provided for this purpose along with the proper blanking plates. Necessary number of cable glands shall be supplied and fitted on this gland. The gland shall project at least 25mm above gland plate to prevent entry of moisture in cable crutch. Gland plate shall have provision for some future glands to be provided later, if required.

3.20 SPACE HEATERS

The heater shall be suitable for continuous operation at 240 V AC supply voltage and shall be provided with on – off switch and fuse shall be provided for heater.

One or more adequately rated, thermostatically connected heaters shall be supplied to prevent condensation in any compartment.

3.21 DELIVERY OF GOODS AND DOCUMENTS RELATED THERETO:

Delivery of goods shall be made by the supplier in accordance with the terms specified by the BHEL in its schedule of requirements.

3.22 INCIDENTAL SERVICES:

The Supplier is required to provide any or all the services broadly outlined in the Technical specification. Any other minor incidental service related to the scope of work like providing necessary assistance whether specifically mentioned or not must be carried out by the Supplier at his own cost. All tools, Tackles Plant etc., required for completion of above works shall be brought by the Supplier.

3.23 DISCREPANCIES BETWEEN DRAWING AND SPECIFICATION:

Should there be any discrepancy between the specifications and/or schedule of prices and/or drawings or any inconsistency, error or omission in either of them, reference must be made to the BHEL/TANTRANSCO for an explanation and the Supplier will be held responsible for any errors that may occur in the work through neglect of this precaution. The explanation of the BHEL/TANTRANSCO shall be final and binding on the Supplier.

3.24 LIST OF DRAWINGS AND DOCUMENTS :

The drawings for the equipments provided by the TANTRANSCO shall be followed strictly by the bidder while designing. For the rest of the equipments, the design is in the scope of the bidder and the same got approved by the TANTRANSCO.

TAMIL NADU TRANSMISSION CORPORATION LIMITED
BHARAT HEAVY ELECTRICALS LIMITED (TBG)
765/400KV AIS SUB STATION ARIYALUR

The bidder shall furnish One sets of relevant descriptive and illustrative published literature pamphlets and the following drawings/documents for preliminary study along with the offer.

- (i) General outline drawings showing dimensions and shipping weights, quantity of insulating media, etc.
- (ii) Sectional views showing the general constructional features of the circuit breaker including operating mechanism, arcing chambers, contacts with lifting dimensions for maintenance.
- (iii) Schematic diagrams of breaker offered for control supervision and re- closing.
- (iv) Structural drawing, design calculations and loading data for support structures.
- (v) Foundation drilling plan and loading data for foundation design.
- (vi) The Type Test Reports
- (vii) Bill of materials shall be furnished along with drawings.

The supplier shall, within 1 weeks of placement of order submit six sets of final version of all the above drawings for BHEL/TANTRANSCO's approval. The TANTRANSCO shall communicate its comments/approval on the drawings to the supplier within reasonable period. The Supplier shall, if necessary, modify the drawings and resubmit four copies of the modified drawings for TANTRANSCO's approval within two weeks from the date of comments.. However the drawing approval does not absolve the supplier from complying with the terms of the specification.

The following should be supplied to each consignee circle along with the initial supply of equipment's ordered.

- 1) Five copies of printed and bound volumes of operation, maintenance and erection manual in English along with the copies of approved drawings and type test reports etc.
- 2) Three sets of manuals detailed in item (1) shall be supplied to the TANTRANSCO/BHEL within one week from the date of approval of drawings.
- 3) The spares for the Equipment's ordered under the scope of the Contract should also be supplied to the consignee circle along with initial supply of the breakers.
- 4) It should be noted that if the above conditions are not fulfilled the initial payment will not be released.

3.25 QUALITY ASSURANCE PLAN:

The bidder shall invariably furnish following information along with his offer. (i) Statement giving list of important raw materials including but not limited to:

- (a) Contact material
- (b) Insulation
- (c) Porcelain
- (d) Sealing material
- (e) Contactor, limit switches, etc. in control cabinet.

Name of sub-supplier for the raw materials, list of standards according to which the raw materials are tested, list of test normally carried out on raw materials in presence of bidder's representative, copies of test certificates.

TAMIL NADU TRANSMISSION CORPORATION LIMITED
BHARAT HEAVY ELECTRICALS LIMITED (TBG)
765/400KV AIS SUB STATION ARIYALUR

- (ii) Information and copies of test certificates as in
- (i) above in respect of bought out accessories.
- (iii) List of areas in manufacturing process, where such inspections are normally carried out for quality control and details of such tests and inspections.
- (iv) Special features provided in the equipment to make it maintenance free.
- (v) List of testing equipment available with the Bidder for final testing of breakers vis-à-vis, the type, special, acceptance and routine tests specified in the relevant standards. These limitations shall be very clearly brought out in the relevant schedule i.e. schedule of deviations from specified test requirements.

The supplier shall submit following information to the TANTRANSCO.

- 1) List of raw materials as well bought out accessories and the names of sub-suppliers selected from those furnished along with offer.
- 2) Type test certificates of the raw material and bought out accessories.
- 3) Quality assurance plan (QAP) withhold points for TANTRANSCO inspection. The quality assurance plan and hold point shall be discussed between the employer and supplier before the QAP is finalized.

The supplier shall submit the routine test certificates of bought out items and raw material, at the time of routine testing of the fully assembled breaker.

3.26 TEMPERATURE RISE :

The maximum temperature attained by any part of the equipment when in service at site under continuous full load conditions and exposed to the direct rays of the sun shall not exceed 30 deg. Cover an ambient of 50 deg. C limits specified in relevant IEC. When the standard specify the limit of temperature rise these shall be exceeded when corrected for the difference between ambient temperature at site and that specified in the approved specifications. No material shall be dispatched from its point of manufacture unless the material has been satisfactorily inspected and tested.

3.27 FITTINGS AND ACCESSORIES :

Following is a partial list of some of the major fittings and accessories to be furnished by contractor as an integral part of the equipment.

Operation mechanism housing complete with:

- (a) Locking arrangement.
- (b) Heaters equipped with automatic thermostatic control and control switch.
- (c) Cable glands.
- (d) Local/Remote change over switch.
- (e) Operation Counter.
- (f) Terminal Blocks.
- (g) Control switches to cut off control power supply.
- (h) MCCBs/MCBs are required with permanent identification marks for protection of D.C. circuits and A.C. circuits.
- (i) Two earthing terminals.

3.28 PACKING AND FORWARDING:

The equipment shall be packed in crates suitable for vertical/horizontal Transport, as the case may be and suitable to withstand handling transport and outdoor storage during transit. The supplier shall be responsible for any damage to the equipment during transit due to improper and inadequate packing and handling. The easily damageable material shall be carefully packed and marked with the appropriate caution symbols. Wherever necessary, proper arrangement for lifting, such as lifting hooks etc., shall be provided. Any material found short inside the packing cases shall be supplied by supplier without any extra cost.

The supplier shall provide such packing of the goods as is required to prevent their damage or deterioration during transit to their final destination as indicated in the Contract. The packing shall be sufficient to withstand, without limitation, rough handling during transit to their final destination as indicated in the Contract and exposure to extreme temperatures, salt and precipitation etc., during transport and open storage. Packing case size and weights shall be taken into consideration wherever appropriate, the remoteness of the 'goods' final destination and absence of heavy mechanized handling facilities, at all points in transit.

The packing, marking and documentation within and outside the package shall comply strictly with such special requirements as shall be expressly provided for in the Contract or in any subsequent instructions issued by BHEL.

3.29 SPECIFICATION FOR NITRYL BUTYL RUBBER

The gaskets are to be used in tanks exposed to Transformer mineral oil/SF6 at about 110° C.

1. Hardness should be Shore A 70 ± 5 .
2. Tensile Strength should be min. 10.8N/sq.mm (Minimum)
3. Elongation strength should be 270% (Minimum)

3.30 APPROVAL PROCEDURE

The scheduled dates for the submission of drawings as well as for, any data/information to be furnished by the Employer would be as per the following schedule. The supplier shall also submit required no. of copies as mentioned in this specification of all drawings/design documents/test reports for approval by the BHEL/TANTRANSCO. The following schedule shall be followed generally for approval.

i.	First Submission	7 days after LOI/PO
ii.	Approval/comments/by employer on Initial submission	Reasonable time
iii.	Resubmission	Within 7 days (whenever from date of comments required) Including both ways postal time.
iv.	Approval or comments	Within 2 weeks of receipt of resubmission.
v.	Furnishing of distribution copies	2 weeks from the date of last approval.

TAMIL NADU TRANSMISSION CORPORATION LIMITED
BHARAT HEAVY ELECTRICALS LIMITED (TBG)
765/400KV AIS SUB STATION ARIYALUR

Note: The supplier may please note that all resubmissions must incorporate, all comments given in the submission by the BHEL/TANTRANSCO failing which the submission of documents is likely to be returned. Every revision shall be a revision number, date and subject, in a revision block provided in the drawing, clearly marking the changes incorporated.

The title block of drawings shall contain the following information incorporated in all contract drawings. Please refer below mention Title block for Submission of Documents.

Title Block

Customer	M/s Tamil Nadu Transmission Corporation Limited
Project:	765/400KV Air Insulated substation Ariyalur
Contractor	BHEL

3.31 DOCUMENTS TO BE SUBMITTED ALONGWITH OFFER

Drawings, GTP, Type Test Reports and List of Past Supplies. **Drawings & Documents**

submitted at the time of offer shall be subject to review at contract stage.

3.31 DOCUMENTATION SCHEDULE

Following Documentation schedule to be followed per project.

S. No.	DESCRIPTION	TENDER STAGE	CONTRACT STAGE FOR APPROVAL	FINAL DOCUMENTATION	
			Prints	Prints	CDs
1	Drawings and Data Sheets	1	7	10	5
2	Drawings "As Built "	-	-	10	
3	Type Test Reports	1	7	10	
4	Erection Manuals	-	7	10	
5	Operation and Maintenance Manuals	-	7	10	
6	Manufacturing Quality Plan	-	7	10	
7	Field Quality Plan	-	7	10	
8	Inspection Test Reports	-	7	10	

Note: Drawings will also be submitted in CD/DVD in Latest AUTOCAD-2004 or Later version or any other CAD package along with conversion files for all major items. Final Documentation shall be submitted in bound volumes with details of Customer & Project etc. written on top.

SECTION – 4**GUARANTEED TECHNICAL PARTICULARS**

(Applicable for both AC Junction Box and DC Interlock Box)

- | | | | |
|----|---|----|-------------------|
| 1 | Manufacturer's name and country. | | |
| 2 | Indoor/ Outdoor applicable. | | |
| 3 | Design Ambient air temperature. | °C | |
| 4 | Thickness of Sheet (FRP Material) | mm | 3 (Min.) |
| 5 | Degree of Protection provided | - | IP 56 with Canopy |
| 6 | Bill of Material for all the equipment mounted in the Boxes giving details | - | |
| | a) Make & Type | | |
| | b) Applicable Standards | | |
| | c) Voltage Rating | | |
| | d) Current Rating | | |
| | e) Duty Class, if applicable | | |
| | f) Manufacturer's Catalogue No. | | |
| 7 | Control Wiring | | |
| | a) Size of Conductor (sq. mm.) | | |
| | i) For CT Circuits | | |
| | ii) For other circuits | | |
| | b) Conductor solid/ stranded | | |
| 8 | Space Heater Rating | W | |
| 9 | Drawing enclosed showing the following | | |
| | a) Outline Dimensions, floor opening, fixing arrangement, weight, etc. | | |
| | b) Front view and inside view showing the mounting arrangement of various equipment | | |
| 10 | Schematic/ wiring diagram enclosed | | |
| 11 | Interconnection drawing showing external cable connections to the Box | | |
| 12 | Type Test Report to verify degree of protection | | |
| 13 | Terminal Block | | |
| | a) Make, type & Cat No. | | |
| | b) Current Rating | | |
| | i) Power Terminals | A | |
| | ii) Other Terminals | A | |
| 14 | PAINTING | | |
| | a) Type/designation/brand name | | |
| | b) Shade | | |
| | c) No. of coats Fabricated Steel Structures | | |
| | d) Whether descriptive pamphlet enclosed | | |

SECTION-5**I. APPLICABLE FOR AC JUNCTION BOX****CHECK LIST FOR INFORMATION TO BE FURNISHED WITH OFFER
RETURN THIS CHECKLIST AS PART OF THE OFFER DULY SIGNED**

The offer may not be considered if the following information and this Checklist are not enclosed with the Offer.

BHEL ENQUIRY. NO:

BIDDER: OFFER REFERENCE:

A)

(1) S.No.	(2) Parameters	(3) Data	(4) Yes / No	(5) Remarks in case reply in Col (4) is NO
1.	Applicable Standard	Latest IS -5039,IS-8623 or IEC-60439, IS-13947		
2.	Type			
3.0	Construction feature			
3.1	Thickness of Sheet	Min. 3.0 mm thk FRP Material		
3.2	Thickness of Mounting Plate	2.0 mm thk CRCA Sheet		
3.3	Degree of protection	IP 56 with Canopy as per IS:13947		
3.4	Control Wiring	2.5 mm ² , Stranded copper		
3.5	Space Heater / Lamp for illumination /Socket	Provided		
3.6	Distinct compartments for aux. Power circuits, interlocking circuit (if applicable), receptacle (if applicable), CT& VT circuit (if applicable)	Provided		
4.0	Power circuit Incoming			
4.1	No. of AC Incomer feeders	Two		
4.2	Rating of Incomer feeders	63amp, 3-Phase, 4 -wire to be controlled by TPN MCB		
4.3	Changeover between incomers	Automatic		
4.4	Terminal blocks of Incomer	CBT 170 of Elmex / Eq. For making loop-in loop- out connection of 4C x 25 sq.mm connected cable. Additional TBs to be provided with a shorting link to extend the incoming supply to one more AC Junction Box.		

(1) S.No.	(2) Parameters	(3) Data				(4) Yes / No	(5) Remarks in case reply in Col (4) is NO
5.0	Power circuit – Outgoing						
5.1	No. of 3-phase AC outgoing feeders (Indenter to tick)	4	5	6	8		
5.2	Rating of 3 -phase AC outgoing feeder	32 amp, 3-phase, 4 -wire controlled by TP/ 4-pole MCB					
5.3	Type of terminal blocks for 3-phase outgoing feeders	CBT M5 of Elmex / Eq.					
5.4	No. of 1- phase, AC outgoing feeders (Indenter to tick)	5	16	10			
5.5	Rating of 1- phase AC outgoing feeders	16 amp, 1-phase, 2 -wire controlled by SP/ DP MCB					
5.6	Type of terminal blocks for 1-phase outgoing feeders	CBT M5 of Elmex / Eq.					
5.7	Provision of spare TBs of each type for power circuit	20 %					
6.0	Clearance between TBs						
6.1	Clearance between two rows of terminal blocks (End to End)	150 mm minimum					
6.2	Clearance between first/bottom row of terminal blocks and associated cable gland plate	250 mm minimum					
7	Feeder names with purpose shall be indicated in drawings	Yes					
8	Name plate details, type etc. shall be mentioned in notes of drawings	Yes					
9	Door handle with integral lock & master key	Provided					
10	TBs fully enclosed with removable covers of transparent, non- deteriorating type plastic material	Provided					

(1) S.No.	(2) Parameters	(3) Data	(4) Yes / No	(5) Remarks in case reply in Col (4) is NO
11	Fixing Hardware (Nuts, Bolts and Washers) for mounting Box	Provided		
12	Base Frame for Box	Provided		
13	Auxiliary Contacts (1 NO+1 NC) for each MCB	Provided		

B) TYPE TESTS

i) Whether type test reports of the following test conducted earlier on identical or similar material are available (test reports are of the test conducted not earlier than **5 (five) years prior to 30.09.2016.** (YES)

ii) If type test reports are not acceptable to BHEL/Customer then above tests shall be conducted by the bidder free of cost. (YES)

C)

S.No.	Description	Confirmation of Supplier
1.	Bidder to confirm that all standard approved drawings / data sheets/QP/ valid type tests reports/ all relevant information shall be submitted to BHEL for organising approval extension from ultimate customer.	
2.	Bidder to confirm that it will offer approved Make of the components and fitments at contract stage. In case the offered make is not approved by the customer, then alternate make shall be supplied without any commercial implications to BHEL.	

Date:

Signature of the authorized representative of Bidder

Company Seal

II. APPLICABLE FOR DC INTERLOCK BOX**CHECK LIST FOR INFORMATION TO BE FURNISHED WITH OFFER****RETURN THIS CHECKLIST AS PART OF THE OFFER DULY SIGNED**

The offer may not be considered if the following information and this Checklist are not enclosed with the Offer.

BHEL ENQUIRY. NO:

BIDDER: OFFER REFERENCE:

A)

(1)	(2)	(3)	(4)	(5)
S. No.	Parameters	Data	Yes / No	Remarks in case reply in Col (4) is NO
1.	Applicable Standard	Latest IS -5039,IS-8623 or IEC-60439, IS-13947		
2.	Type			
3.0	Construction feature			
3.1	Thickness of Sheet	Min. 3.0 mm thk FRP Material		
3.2	Thickness of Mounting Plate	2.0 mm thk CRCA Sheet		
3.3	Degree of protection	IP 56 with Canopy as per IS:13947		
3.4	Control Wiring	2.5 mm ² , Stranded copper		
3.5	Space Heater / Lamp for illumination /Socket	Provided		
3.6	Distinct compartments for aux. Power circuits, interlocking circuit, receptacle (if applicable), CT& VT circuit (if applicable)	Provided		
4.0	Interlocking circuit			
4.1	No. of Interlocking terminal block (Indenter to tick)	120 180 200 300 NH		
4.2	Type of Interlocking terminal block	Non - disconnecting stud type CAT M4 of Elmex /Eq.		
5.0	Clearance between TBs			
5.1	Clearance between two rows of terminal blocks (End to End)	150 mm minimum		
5.2	Clearance between first/bottom row of terminal blocks and associated cable gland plate	250 mm minimum		
6	Feeder names with purpose shall be indicated in drawings	Yes		

(1) S. No.	(2) Parameters	(3) Data	(4) Yes / No	(5) Remarks in case reply in Col (4) is NO
7	Name plate details, type etc. shall be mentioned in notes of drawings	Yes		
8	Door handle with integral lock & master key	Provided		
9	TBs fully enclosed with removable covers of transparent, non-deteriorating type plastic material	Provided		
10	Fixing Hardware (Nuts, Bolts and Washers) for mounting Box	Provided		
11	Base Frame for Box	Provided		

B) TYPE TESTS

i) Whether type test reports of the following test conducted earlier on identical or similar material are available (test reports are of the test conducted not earlier than **5 (five) years prior to 30.09.2016.** (YES)

ii) If type test reports are not acceptable to BHEL/Customer then above tests shall be conducted by the bidder free of cost. (YES)

C)

S. No.	Description	Confirmation of Supplier
1.	Bidder to confirm that all standard approved drawings / data sheets/QP/ valid type tests reports/ all relevant information shall be submitted to BHEL for organizing approval extension from ultimate customer.	
2.	Bidder to confirm that it will offer approved Make of the components and fitments at contract stage. In case the offered make is not approved by the customer, then alternate make shall be supplied without any commercial implications to BHEL.	

Date:

Signature of the authorized representative of Bidder

Company Seal