

**TENDER SPECIFICATION  
BHEL PSSR SCT 2036**

**FOR**


**Carrying out excavation work of Emergency Reclaim Hopper and tunnel using Contiguous pile system at 2 x 660 MW, Ennore SEZ Supercritical Thermal Power Project (Unit-1 & 2) at Ash Dyke of NCTPS, Tamil Nadu. Telangana state**

**PRICE BID  
VOLUME –II**



**BHARAT HEAVY ELECTRICALS LIMITED**  
(A Government of India Undertaking)  
Power Sector – Southern Region  
690, Anna Salai, Nandanam, Chennai – 600 035

**TENDER SPECIFICATION CONSISTS OF**

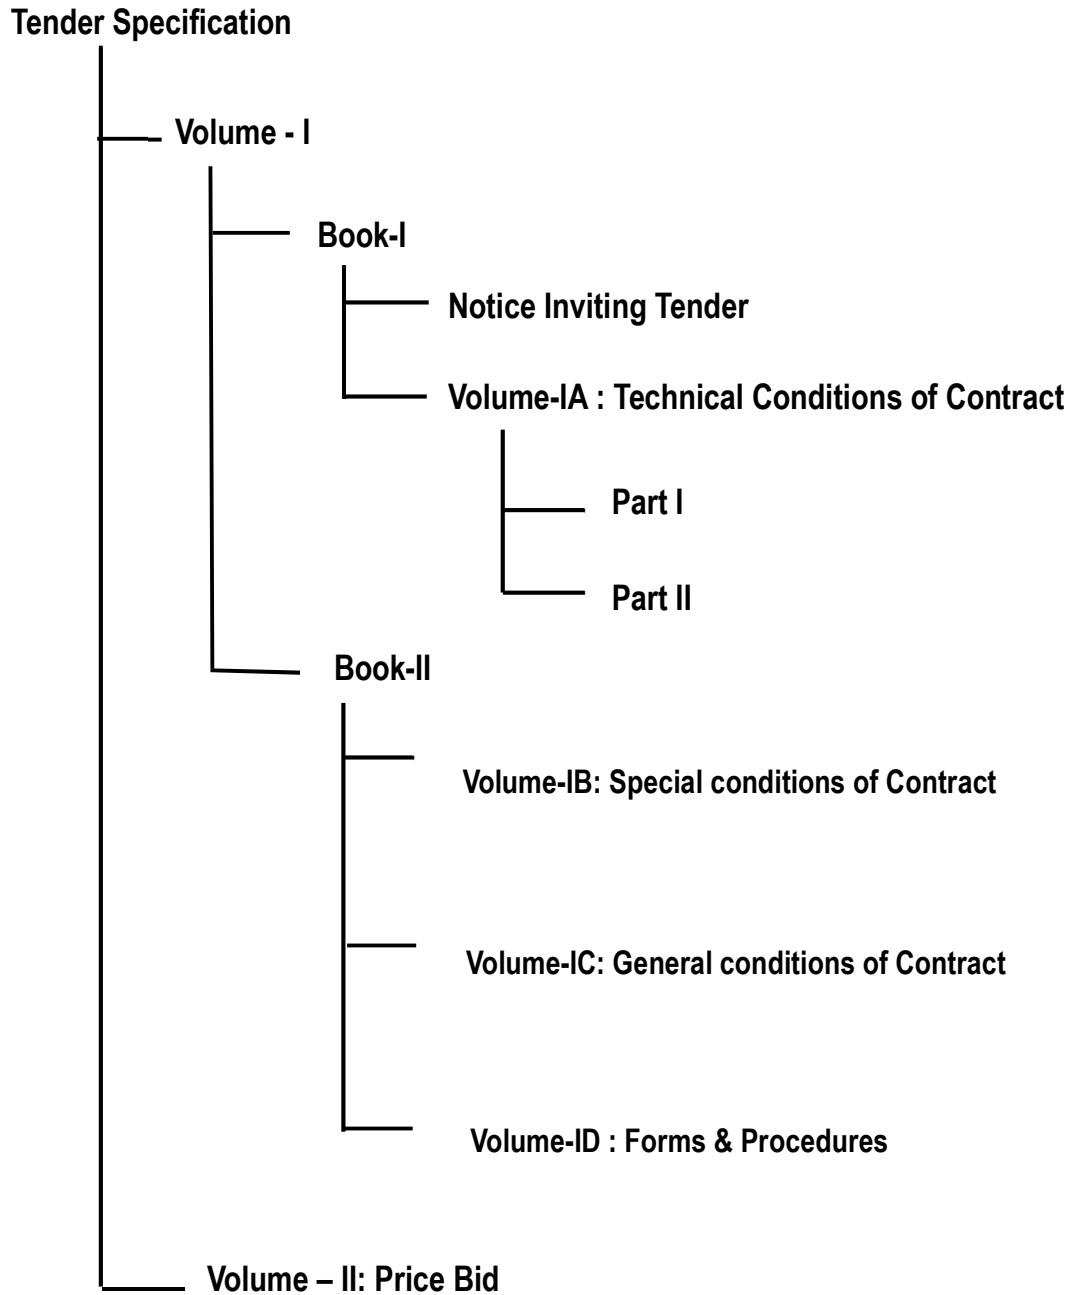

## PRICE BID

---

CONTENTS	
Description	No. of pages
Part A : Instructions to the Bidders	01
Part B : Format for total amount (Enclosed as a separate Excel File in BHEL NIC e-Procurement portal for the subject tender)	(Separate Excel File)
Part C: Bill of quantities with weightage for amount of each items with respect to the total quoted price	8

## PRICE BID

---

### **PART A**

#### **Instruction to Bidders:**

1. The quantity indicated in the BOQ / Price bid (Part C) is approximate only and is liable for variation. Payment will be as per actual quantity executed as certified by BHEL Engineer.
2. Tenderers are requested to affix their company seal and authorized signature in all pages.
3. Bidders shall quote 'Total Amount' in the format enclosed as a separate Excel File in BHEL NIC e-Procurement portal for the subject tender and upload the same under 'Packet details - > Tender covers -> Finance '(Cover Type Description – Price Bid)'' and same shall be taken into account for evaluation and awarding and hence, shall be complete in all respect for the full scope of work defined in specification and in accordance with terms & conditions of the tender. Any other entry elsewhere in the price bid shall be treated as Null and Void. Quoting of rates in any other form/ formats will not be entertained.
4. The above mentioned 'Total amount' is for the entire Bill of Quantity (BOQ) given in Part -C of the Price Bid.
5. BHEL has pre-fixed the weightages for the amount of individual items of Bill of Quantity with respect to the 'Total Amount' in Part-C.
6. Based on the pre-fixed weightages, the amount for the individual items of the Bill of Quantity shall be arrived at. This amount shall be rounded off to the nearest rupee.
7. Based on the quantities of individual item and the amount arrived in SI No: 6 above, unit rate of individual items shall be derived. This unit rate shall be rounded off to four decimal places.
8. Bidders to note that this is an item rate contract. Payment shall be made for the actual quantities of work executed at the unit rate arrived at as per SI No.7 above.

**Part C : Bill of Quantities**

**Tender Specification BHEL:PSSR:SCT:2036 for Carrying out excavation work of ERH and tunnel using Contiguous pile system**

**at 2 X 660 MW Ennore SEZ Supercritical Thermal Power Project at Ash Dyke of NCTPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
100.0	EARTH WORK: Earth work In excavation, backfilling and disposal including all labour, equipments etc complete as per specification, drawing and as directed by engineer- in-charge for the following.	--		
101.0	Earth work in excavation in all types of soil including ash which can be excavated by any means including setting out, levelling, dewatering (but excluding special type of dewatering viz. well point method), shoring & strutting (wherever required), dressing the sides & bottom, all lifts, ramming/compacting the excavated bottom, stacking, disposal of surplus excavated materials within a lead upto 1Km, spreading/levelling of disposed materials etc all complete for following depths below ground level.	--		
a	Depth from ground level but not exceeding 2 m	CUM	12,090	.0216765
b	Depth exceeding 2 m but not exceeding 4 m	CUM	8,577	.0192765
c	Depth exceeding 4 m but not exceeding 6 m	CUM	2,918	.0082161
d	Depth exceeding 6 m but not exceeding 8 m	CUM	2,749	.009684
e	Depth exceeding 8 m but not exceeding 10 m	CUM	2,537	.010731
f	Depth exceeding 10 m but not exceeding 15 m	CUM	4,166	.0202513
108.0	Earthwork in Back filling upto any depth below ground level around foundations, plinths, trenches, drains etc to proper grade and level in layers not exceeding 250 mm thickness using/with selected materials directly from excavation within a lead upto 1Km and compacted as specified including re-excavation of stacked earth, watering, ramming/compaction by manual/mechanical means, dressing etc all complete.for the following.	--		
b	Each layer compacted so as to achieve at least 95% maximum dry density as per IS-2720 (Part-VII)	CUM	23,324	.0138412
109.0	Extra over ST No. 101 and 108 for carriage of material/earth for every 500m or part thereof beyond an initial lead of 1km.	--		

**Part C : Bill of Quantities**

**Tender Specification BHEL:PSSR:SCT:2036 for Carrying out excavation work of ERH and tunnel using Contiguous pile system**

**at 2 X 660 MW Ennore SEZ Supercritical Thermal Power Project at Ash Dyke of NCTPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
a	Carriage for stacking/ backfilling of serviceable material/ earth	CUM	200	.0000278
b	Carriage for disposal of serviceable/unserviceable material/ earth	CUM	200	.0000278
200.0	CONCRETE WORK: Providing and placing concrete work including cost of labour, materials (unless otherwise specified in BOQ/contract specification) and equipment for handling, transportation, batching, mixing, placing, vibrating and curing (excluding cost of centering, shuttering and reinforcement) with mechanised equipments like batching plant, transit mixer, concrete pump etc. complete as per drawing, specifications and as per direction of engineer in charge for the following.	--		
205.0	Providing and laying Design Mix cement concrete conforming to IS:456 & IS 10262-2009 for reinforced concrete works with coarse sand and graded hard stone aggregate of 20mm nominal size in foundations/substructure, grade slab, paving, drains, under floors etc at all level below finished floor level, any shape, position or thickness etc complete including use of plasticizer/ superplasticizer conforming to IS:9103 (latest) to achieve required slump in concrete all complete as per specification & drawing for the following.	--		
b	M 30 Grade	CUM	210	.0227155
A224	GUNITING/SHOTCRETING: Shotcreting (Guniting) specified concrete surfaces as per the following specifications including all materials. Labour, tools and plants, scaffolding etc all complete as per the directions of Engineer in charge, :	--		
--	i.Fixing wire fabric conforming to IS;1566 as reinforcement with 4mm diameter spaced at 100mm c/c both ways electrically cross welded by maintaining 100mm overlap for adjacent sheets	--		

**Part C : Bill of Quantities**

**Tender Specification BHEL:PSSR:SCT:2036 for Carrying out excavation work of ERH and tunnel using Contiguous pile system**

**at 2 X 660 MW Ennore SEZ Supercritical Thermal Power Project at Ash Dyke of NCTPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
--	ii.Fine aggregate shall consist of natural sand or crushed stone from a known source and shall be strong, hard, coarse, sharp, chemically inert, clean and free from any coating. It shall be free from clay, coal or coal residue, organic or any other impurities that may impair the strength or durability of the concrete and shall conform to IS: 383. The fineness modulus shall be preferably between 2.5 and 3.3. Any other value can be used, with prior approval of the Engineer. Fine aggregate (Sand) shall be well graded and particles shall range in size within limits. The Engineer may approve the use of any other grading as per requirement or as per IS: 9012.	--		
--	iii.The surface after the placement of reinforcement and / or welded mesh and not more than six hours prior to the application of concrete, shall be thoroughly cleaned of all loose materials and dirt. The Contractor shall properly prepare the surfaces, reinforcement and / or welded mesh to receive the shotcrete. Cleaned surfaces shall be wetted not more than hour prior to shotcreting.	--		
--	v.The mix as placed on surface shall be one part cement to three parts approved sand by mass. Cement and sand shall be dry mixed; no water shall be added after mixing and before using in the gun. The quantity of water when added shall be only that which is sufficient to hydrate the cement. For average atmospheric conditions, the water cement ratio for shotcrete in place shall be between 0.35 and 0.5 by mass. Suitable admixture shall be used wherever required.	--		
--	vi.A uniform pressure of not less than 25 Kgf / cm <sup>2</sup> at the nozzle shall be maintained. Necessary adjustments shall be made to ensure this pressure, taking into account the length of hose and height of the place to be shotcreted, above location of the machine.	--		
--	vii.The application shall proceed in an upward direction. Beams, stiffeners and intermediate walls, if any, shall be wrapped with wire fabric and completely covered with shotcreting. All rebound shall be removed from the area of application as the work progresses and such rebound material shall not be reused.	--		

**Part C : Bill of Quantities**

**Tender Specification BHEL:PSSR:SCT:2036 for Carrying out excavation work of ERH and tunnel using Contiguous pile system**

**at 2 X 660 MW Ennore SEZ Supercritical Thermal Power Project at Ash Dyke of NCTPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
--	viii.As soon as the freshly shotcreted surface shows the first dry patches, a fine spray of water shall be applied to keep too moist. After the surface has hardened, it shall be kept continuously moist for minimum seven days. If there is extreme heat, especially when accompanied by hot winds, the shotcreted surface, immediately upon completion, shall be covered with burlap or similar covering, which must be kept continuously moist for 14 days after shotcreting. The temperature of the lining shall not be permitted to exceed 38oC during placing and curing. (Supply of cement is in Contractor's scope unless otherwise specified in BOQ).	--		
b)	Shotcreting for thickness 75mm and above of with welded wire mesh as specified	SQM	2,150	.0402026
300.0	FORMWORK: Providing, fixing and removing formwork at all elevations for all structures, as per specifications and including all labour, material, scaffoldings and centering etc. complete as per drawing, specifications and as per direction of engineer in charge for the following.	--		
301.0	Fairface form work with good quality water proof ply wood of minimum 12mm thickness and smooth surface below finished ground floor level for foundations, footings, base of columns, walls, columns, pilasters, beams, mass concrete, trenches etc.including chamfering of edges as per drawing, specification and instruction of engineer in charge..	SQM	300	.0025606
400.0	REINFORCEMENT WORK : Reinforcement work including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling etc at all level as per specification, drawings and as directed by engineer - in - charge.	--		
403.0	Transportation, straightening, cutting, bending, placing in position at all level, binding in position of steel reinforcements of TMT steel of grade Fe-500D or 500EQR confirming to IS:1786 including cost of binding wire, labour, scaffolding, transportation to & from stores etc complete all as per specifications, drawings and as directed by Engineer.(Reinforcement steel shall be supplied by BHEL as a free supply)	MT	295	.0567315

**Part C : Bill of Quantities**

**Tender Specification BHEL:PSSR:SCT:2036 for Carrying out excavation work of ERH and tunnel using Contiguous pile system**

**at 2 X 660 MW Ennore SEZ Supercritical Thermal Power Project at Ash Dyke of NCTPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
S403	Supply including delivery at site, steel reinforcements of TMT steel of grade Fe-500, Fe-500D or 500EQR as applicable conforming to IS:1786 complete all as per specifications, drawings and as directed by Engineer. Note - This item shall be operated if required, at the discretion of BHEL.	MT	20	.017926
700.0	MS EMBEDMENTS: Embedments including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		
701.0	Supply, fabricating and fixing of mild steel embedments, inserts, pipe sleeves, angle pieces, rungs of various diameters, plates of dimensions as required etc. including welding, bolting, cutting, drilling, scaffolding, setting etc. all complete.	MT	5	.0069477
704.0	Supplying, fabricating, erecting and installing following items in concrete/brickwall for all kind of works, including setting material in concrete, layout, scaffolding, cutting, forming, grinding, drilling, bolting, welding, jointing, testing etc. all complete.	--		
e	Expansion fasteners (mechanical galvanised) of HILTI make or equivalent of safe tensile capacity as specified below for concrete work with expansion sleeve of stainless steel:	--		
v	HST M20	Nos	450	.0082784
2300.0	STRUCTURAL WORKS: Structural steel works including all labour, material (unless otherwise specified in BOQ/contract specification), equipments unless otherwise specified, transportation, handling etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		

**Part C : Bill of Quantities**

**Tender Specification BHEL:PSSR:SCT:2036 for Carrying out excavation work of ERH and tunnel using Contiguous pile system**

**at 2 X 660 MW Ennore SEZ Supercritical Thermal Power Project at Ash Dyke of NCTPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
2301.0	Fabrication, erection and alignment of structural steel with mild steel rolled section / built up section / combination of both conforming to IS:2062, pipes conforming to IS:1161/ IS:1239 in waler beams, strut, support bracket etc. including connection design & preparation of fabrication drgs, collection of steel from stores, fabrication, straightening, cutting, bending, rolling, grinding, machining, drilling, welding, electrodes and other consumables, alignment, erection bolts & nuts (weight of erection bolts, nuts and welds not payable), assembly, edge preparation, preheating (min preheat and interpass temperature of 20o C for welding over 20 mm and upto 40 mm & 66o C for welding over 40 mm and upto 63 mm & 110o C for thickness over 63 mm & use of low hydrogen/ radiogenic electrodes), post heating, testing of welders, inspection of welds, visual inspection, non destructive and special testing, rectification and correction of defective welding works, production test plate, inspection and testing, erection scheme, protection against damage in transit, stability of structures, installation of temporary structures, setting column bases, surface preparation by means of manual or mechanical power tools as per IS:1477 part 1, rectification, dismantling and removal of all temporary structures (weight of temporary structures not payable), return of surplus / waste steel materials to store etc. all complete. Including appointment of a seperate agency, approved by BHEL, for preparation of fabrication drawing and obtaining BHEL's approval on fabrication drgs, in consultation with BHEL. Structural steel shall be supplied by BHEL free of cost for incorporation in permanent work.	MT	175	.0649133
S2301	Supply including delivery at site, structural steel with mild steel rolled sections, conforming to IS:2062, pipes conforming to IS:1161/ IS:1239, chequered plate conforming to IS: 3052 complete all as per specifications, drawings and as directed by Engineer, from the Customer approved agencies. Note - This item shall be operated if required, at the discretion of BHEL.	MT	20	.0185788
2302.0	Extra over ST NO. 2301 for blast cleaning of steel structures to near white metal surface(Sa 2 1/2 ) and applying 2 coats of red oxide zinc-chromate primer (one coat at shop and one coat after erection), including touch-up painting etc all complete.	MT	175	.015065

**Part C : Bill of Quantities**

**Tender Specification BHEL:PSSR:SCT:2036 for Carrying out excavation work of ERH and tunnel using Contiguous pile system**

**at 2 X 660 MW Ennore SEZ Supercritical Thermal Power Project at Ash Dyke of NCTPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
2313.0	Dismantling of steel structure, lowering/lifting of material and carriage of the dismantled material up to field fabrication shop / projects storage including temporary dismantling, cutting, re-welding, supporting, and restoring to correct position all temporarily dismantled members, re-alignment of all adjacent connected members to their correct positions ( weight of such adjacent members and temporarily dismantled members not payable), scaffolding, staging, tools & tackles, gas cutting, welding, consumables etc all complete.	MT	175	.0227831
2500.0	PILING WORK: Piling works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. as per specification, drawings and as directed by engineer - in - charge.	--		
2501.0	Mobilisation of hydraulic rotary piling rigs and accessories capable of pile boring/drilling in all types of strata/ash etc., installing various size of bored cast in situ RCC piles to project site and demobilisation of the same after completion of piling works etc all complete.	NOS	2	.0292845
2504.0	Installation of Bored cast-in-situ RCC vertical pile as per IS 2911 (Part 1 Sec 2) with diameter and length as specified (length to be measured from pile cut-off level to the bottom of pile) using cement concrete grade M30 conforming to IS:456 with 20 mm nominal size stone aggregates with a minimum cement content of 400Kg per cum of concrete including providing all materials (but excluding reinforcement steel for which measurement/payment shall be made separately), boring/drilling in all types of soil, providing bentonite slurry and/or casing for stabilization of pile bore, flushing of pile bore, cleaning, providing plasticizer wherever required, breaking pile head to cut off level and exposing pile reinforcement for embedment in pile cap etc including empty boring from ground level to pile cutoff level etc all complete as per specification, drawing and as directed by the engineer-in-charge for the following.	--		
f	Pile with 900 mm diameter and 20 m length below cut off level	Each	210	.52415
2506.0	Rebate on ST.No.2504 for pile length less than the specified length of 20m below cut off level for the following.	--		

**Part C : Bill of Quantities**

**Tender Specification BHEL:PSSR:SCT:2036 for Carrying out excavation work of ERH and tunnel using Contiguous pile system**

**at 2 X 660 MW Ennore SEZ Supercritical Thermal Power Project at Ash Dyke of NCTPS**

<b>Ref.No.</b>	<b>Description</b>	<b>Unit of Measurement</b>	<b>Qty.</b>	<b>Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount</b>
f	For 900 mm diameter pile	Rm	1,020	-.1403398
--	DEWATERING	--		
D	Design, supply and installation of adequate dewatering/drainage arrangement/pumps as per the geotechnical report and carrying out dewatering for the entire period of excavation and other associated civil works to keep the work area dry & workable including deployment of redundant capacity DG set(refer TCC clause 3.4.7).	--		
D.1	Installation of suitable dewatering system including installation of electricity measuring system and deployment of DG set.	LOT	1	.0386097
D.2	Operation & maintenance of dewatering system inclusive of operator, labour, consumables, power/fuel consumption charges etc.	per month	10	.1678609
<b>TOTAL Weightage</b>				1.0