


ENLARGED VIEW 'A'

Physical appearance of the finished bushing	Should have smooth surface, free of voids ,cracks and chipping. No patch work of refilling of voids or any hairline cracks allowed on the finished product.
---	---

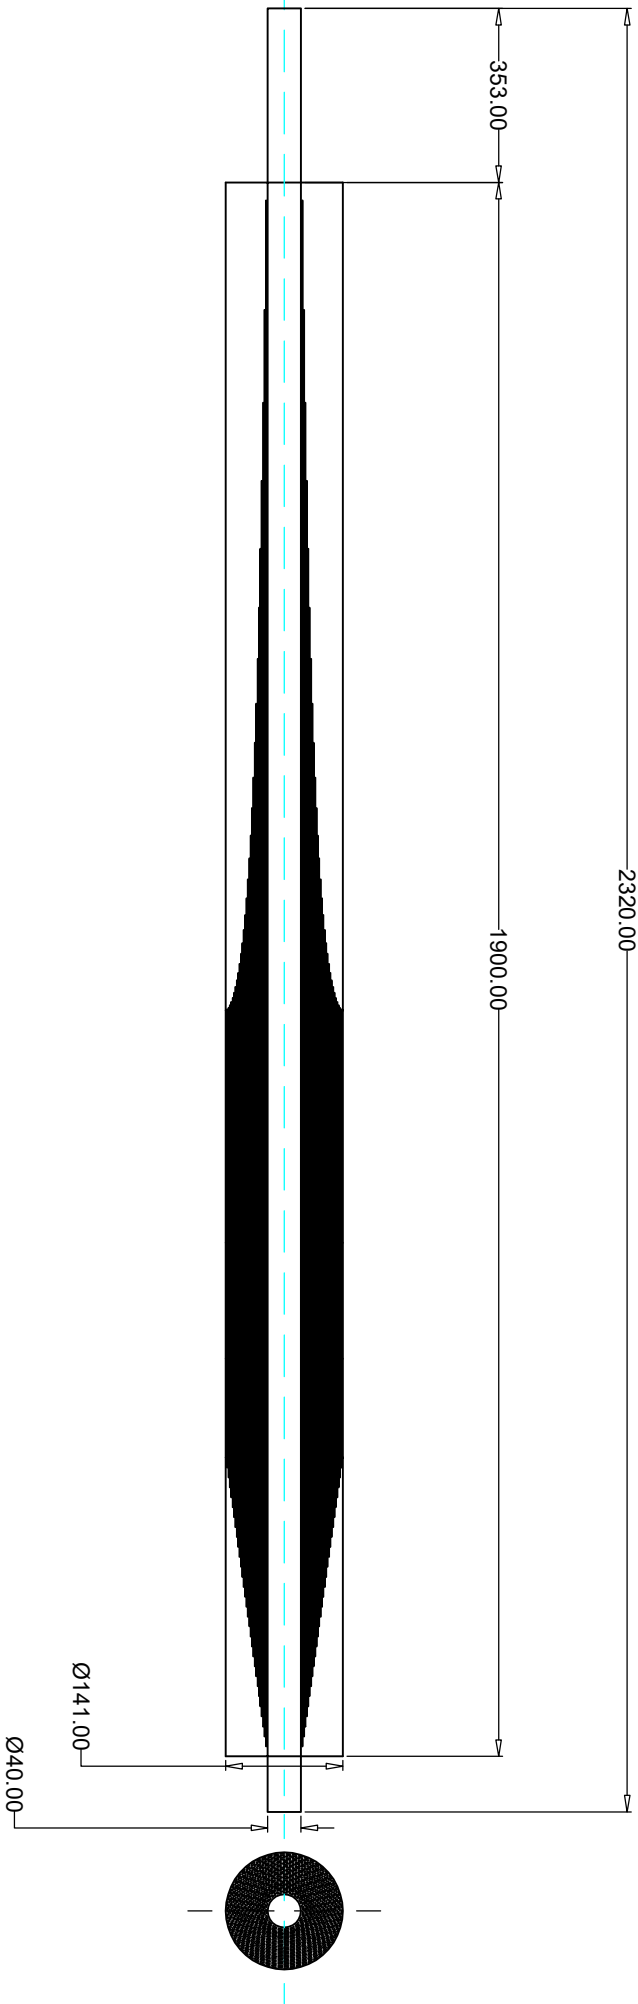

01	LT INSERT	NO DOG 426 113 1000	HE-30	01	
VAR 00	REMARKS	VAR ITEM NO	DESCRIPTION	STD	DRAWING NO.
		VAR	TTNO	MATL CODE	MATL SPECN
			UNIT	QTY	25%

NAME OF CUSTOMER

145KV RIP

DRN	NAME	SIGN.	DATE	NO. OF VAR.
CXO	Steeriyasu G		20.11.20	
Appn	MM Rao		20.11.20	01

REV.	DATE	ALTERED	DATE	ALTERED	SCALE	WEIGHT(GS)	REF. TO	ITEM NO.	NO. OF SHEETS
ZONE	CHECKED	ZONE	CHECKED	DEPT.	GRADE OF TOL. DIM. C/M/P	NTS	DRAWING NO.	REV.	
							RD DG 4 26 1133 8000	00	
							RD DG 4 26 1133 8000	00	