


INVENTORY NO.

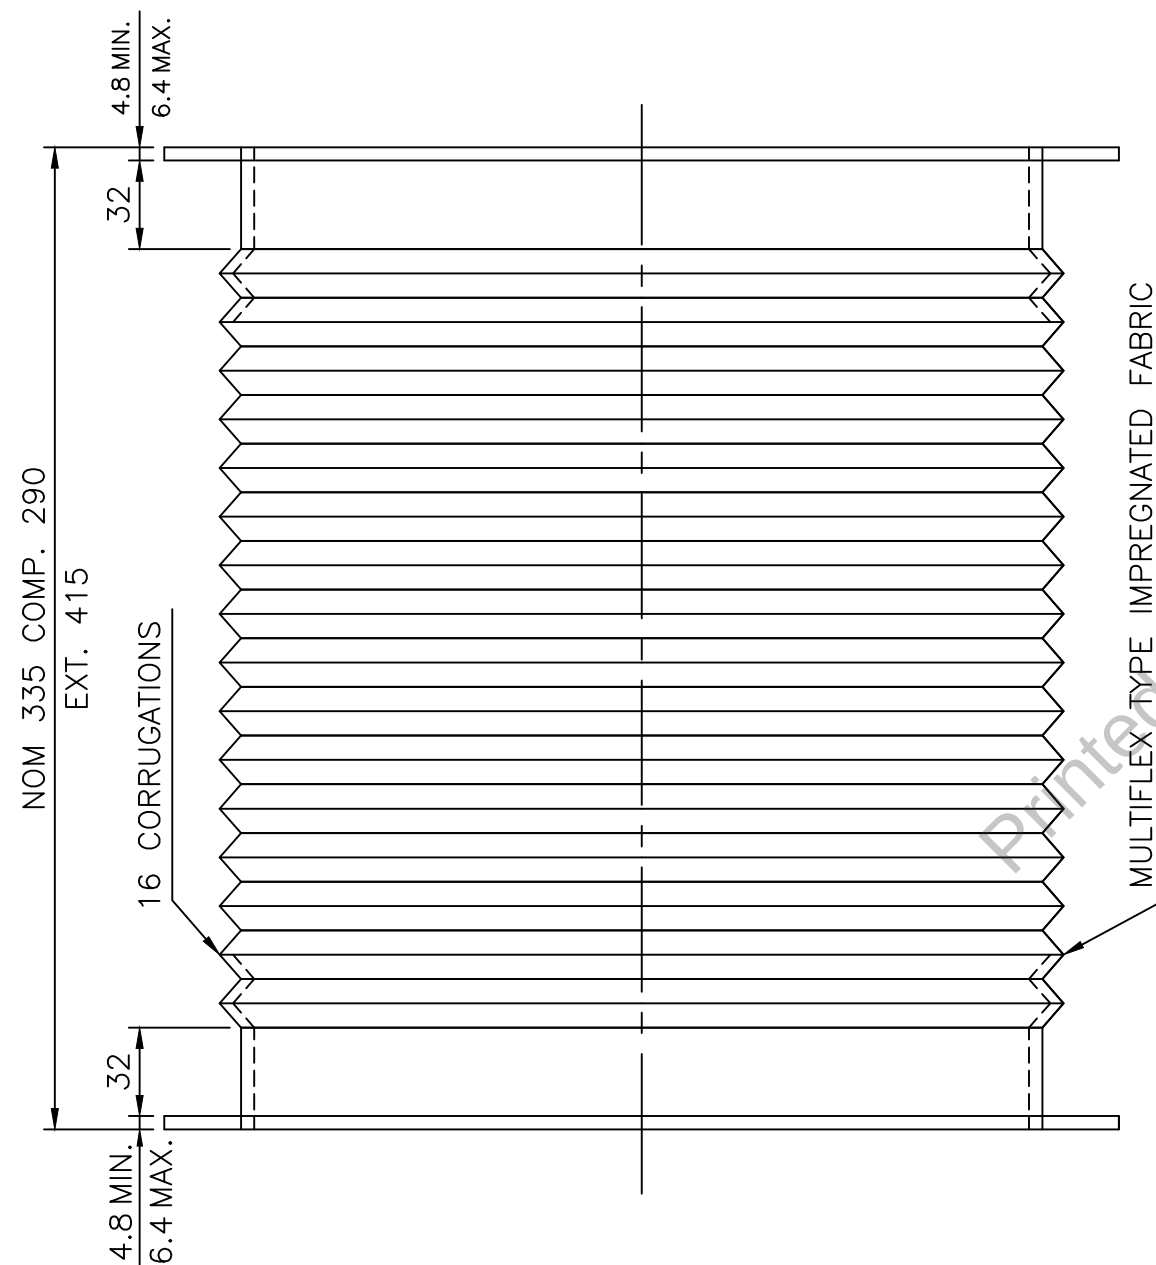

1.6 MIN.  
2.4 MAX.

1. RUBBER TO BE OIL RESISTANT.
2. MINIMUM OVERLAP ON FABRIC JOINTS 1/2 (TO BE MAINTAINED)
3. JOINT LINE OF FABRIC TO BE DIAGONAL THE MANUFACTURE SHOULD SUBMIT A COPY OF THE DRAWING SHOWING THE CENTER LINE OF THE FABRIC JOINT, MINIMUM OVERLAP THE DEVELOPED LENGTH AND THE EXPANDED LENGTH OF THE BOOT.
4. THICKNESS TO BE UNIFORM THROUGH THE BELLOWS & NECK.
5. RUBBER SHOULD NOT TEAR WEN STRETCHED OR TWISTED.
6. BOOT SHALL BE LEAKPROOF & SHALL WITH STAND AN INTERNAL PRESSURE OF 5R.S.L.G.
7. THE EDGES SHALL BE IN THE SAME PLANE OVER THE CORRUGATIONS.
8. FABRIC LAMINATIONS TO BE CONTINUOUS THROUGH THE FLANGE NECK, BELLOWS AND SHOULD NOT BE CUT AWAY AT THE FOLDS.

SIZE A2