



PRE-QUALIFICATION REQUIREMENTS FOR DISTRIBUTION BOARDS

ITEMS : LDBs/ WDBs/ Lighting Panels	
SCOPE: Supply YES. Erection & Commissioning: NO.	
1	Vendor should be designer & manufacturer of LDBs/ WDBs.
2 (a)	Availability of temperature rise and degree of protection test certificates conducted at independent lab or witnessed by third party for LDBs/ WDBs
2 (b)	Availability of test reports (witnessed by third party) to establish in-house capability to carry out all Functional tests, HV test, IR measurement as per relevant IS for LDBs/ WDBs.
3	Option -1. One(1) no. performance certificate for min. two (2) years of trouble free operation for LDBs/ WDBs and lighting panel. Performance certificate should be from end user only. Performance certificates should not be more than ten (10) years old from the date of techno- commercial bid opening. OR Option-2 : Repeat orders received from One(1) purchasers/end users for LDBs/WDBs and lighting panel during last ten (10) years provided the gap between award of two PO's is minimum two (2) years.
4	Capacity of manufacturing 3 nos. LDBs/WDBs, 10 nos. Lighting Panels per month.
5	Manufactured and supplied at least 10 nos. LDB's/ WDBs, 30 nos. lighting panels in one or more orders.
6	(Minimum 2 nos. purchase orders for the LDBs/WDBs) OR (1 no. purchase order for the LDBs/WDBs & 1 no. purchase order for the lighting panel) shall be submitted which should not be more than five (5) years old from the date of techno- commercial bid opening for establishing continuity in business.

Notes:-

1. The credentials for LDB/ WDB's should pertain to min. 100A rating and for LP's to min 63A incomer rating.
2. In place of LDBs/ WDBs, documents submitted for LT switchgear panels shall also be considered.
3. In place of Lighting Panels, documents submitted for wall mounted electrical JB's & feeder pillars etc. (with min. rating 63A) shall also be considered.
4. Consideration of offer shall be subject to customer's approval of bidders, if applicable.

PREPARED BY <i>M.S.S. Rajpal</i> M S S RAJPAL DEVENDRA SINGH (MANAGER/ DY MANAGER)	CHECKED BY <i>Megha Gupta</i> MEGHA KAVITA GUPTA (MANAGER/ SR MANAGER)	REVIEWED BY <i>Ayan Saha</i> AYAN SAHA/ HEMA KUSHWAHA (DGM/SR. MANAGER)	APPROVED BY <i>Sandeep Lodhi</i> SANDEEP LODHI/ PRAVEEN DUTTA (Sr. DGM/AGM)	APPROVED BY <i>Debasish Rath</i> DEBASISH RATH AGM (DH-ELECT)
---	---	---	---	--


1553236/2023/PS-PEM-EL






2 X 500 MW NTPC SIPAT FGD System Package &
4X210 MW + 3 X 500 MW NTPC KAHALGAON-FGD
PRE-QUALIFICATION REQUIREMENTS FOR
DISTRIBUTION BOARDS



PE-PQ-481/491-558-E005
REVISION NO 00 DATE 03/04/2023
SHEET NO 2 OF 2

- 5. Bidder to submit all supporting documents in English. If documents submitted by bidder are in language other than English, a self-attested English translated document should also be submitted.
- 6. Notwithstanding anything stated above, BHEL reserves the right to assess the capabilities and capacity of the bidder/collaborators to perform the contract, should the circumstances warrant such assessment in the overall interest of BHEL.
- 7. After satisfactory fulfillment of all the above criteria/ requirement, offer shall be considered for further evaluation as per NIT and all the other terms of the tender.

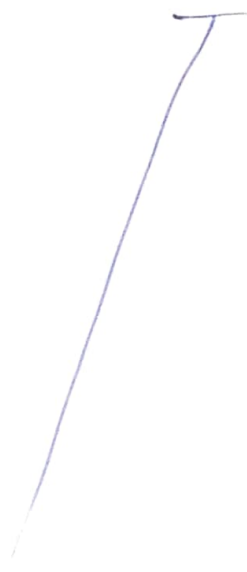

PREPARED BY	CHECKED BY	REVIEWED BY	APPROVED BY
 M S S RAJPAL DEVENDRA SINGH (MANAGER/ DY. MANAGER)	 MEGHA KAVITA GUPTA (MANAGER/ SR. MANAGER)	 AYAN SAHA HEMA KUSHWAHA (DGM/SR. MANAGER)  SANDEEP LODH PRAVEEN DUTTA (Sr. DGM/AGM)	 DEBASISA RATH AGM (DH-ELECT)

**4X210 MW + 3 X 500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD System**

VOLUME – II

**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO: PE-TS-481/491-558-E002, REV-0



**BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT
NOIDA, UTTAR PRADESH, INDIA – 201301**

1553236/2023/PS-PEM-EL



TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

CONTENTS SHEET

4X210 MW +3 X 500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM

REV. 0

DATE: 23.06.2023

SHEET 1 OF 1

CONTENTS

<u>S. NO.</u>	<u>DESCRIPTION</u>	<u>NO. OF SHEETS</u>
01	SECTION - I	
	COMPLIANCE CERTIFICATE	1
	SPECIFIC TECHNICAL REQUIREMENT	6
	DATA SHEET-A	9
	SUB-VENDOR LIST	12
02	SECTION - II	
	GENERAL TECHNICAL REQUIRMENTS	22
	QUALITY PLAN	3
	PACKING SPECIFICATION	2

TOTAL NUMBER OF SHEETS (INCLUDING COVER & SEPARATOR SHEETS): 57

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 1 OF 17

SECTION – I
SPECIFIC TECHNICAL REQUIREMENTS

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 2 OF 17

COMPLIANCE CERTIFICATE

The bidder shall confirm compliance to the following by signing/ stamping this compliance certificate and furnishing same with the offer.

1. The scope of supply, technical details, construction features, design parameters etc. shall be as per technical specification & there are no exclusion/ deviation with regard to same.
2. There are no deviation with respect to specification other than those furnished in the 'schedule of deviations'.
3. Only those technical submittals which are specifically asked for in NIT to be submitted at tender stage shall be considered as part of offer. Any other submission, even if made, shall not be considered as part of offer.
4. Any comments/ clarifications on technical/ inspection requirements furnished as part of bidder's covering letter shall not be considered by BHEL, and bidder's offer shall be construed to be in conformance with the specification.
5. Any changes made by the bidder in the price schedule with respect to the description/ quantities from those given in BOQ-Cum-Price schedule of the specification shall not be considered (i.e. technical description & quantities as per specification shall prevail).

BIDDER'S STAMP & SIGNATURE

1553236/2023/PS-PEM-EL



**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 3 OF 17

1.0 SCOPE OF SUPPLY

- 1.1 Design, manufacture, assembly, inspection & testing at vendor's/ sub-vendor's works, proper packing and delivery to site of LIGHTING DB/ WELDING DB & LIGHTING PANELS as mentioned in different sections of this specification, complete with all accessories for efficient and trouble-free operation.
- 1.2 Standard technical requirements of LIGHTING DBs/ WELDING DBs & LIGHTING PANELS are indicated in Section-II. Project specific requirements/changes are listed in Section-I.
- 1.3 The stipulations of Section-I, followed by those of Data Sheet-A shall prevail and govern in case of conflict between the corresponding requirements of Section-I and Section-II.
- 1.4 Review of sub-vendor's documents by the vendor shall not relieve the vendor from the responsibility of design & supply as per contract / relevant standards.
- 1.5 The documents shall be in English language and MKS system of units.
- 1.6 Make of all equipment's and components shall be as per attached Sub-Vendor list enclosed as per Annexure-1 to section-I.
- 1.7 Line items of data sheet A which are marked in RED to be filled up by supplier and submitted to BHEL after placement of order

2.0 BILL OF QUANTITIES:

- 2.1 Quantity requirements shall be as per BOQ-cum-price schedule as part of NIT.
- 2.2 Vendor shall submit the drawing/document submission/resubmission schedule after approval of documents.
- 2.3 In BOM each of the item to be uniquely identified with item code no. or item SI. No. Supplier to ensure that all the items which will find separate mention in the packing list are covered in detailed BOM.
- 2.4 Supplier to also give the following undertaking in the BOM: "The BoM provided herewith completes the scope (in content and intent) of material supply under PO No. -----, dated -----. Any additional material which may become necessary for the intended application of the supplied item(s)/package will be supplied free of cost in most reasonable time."

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01


DATE: 23.06.2023

SHEET 4 OF 17

3.0 SPECIFIC TECHNICAL REQUIREMENTS


S.no	Reference clause no of section-II (if any)	Specific requirement / change
1	Clause 3.1.1	Following clause is added: Interlock required to be provided between two incomer & bus coupler of LDB/WDBs. WDB shall have one incomer.
2	Clause 10.2	Clause 10.2 shall be read as: Erection & commissioning spares are included in the bidder's scope of supply. Bidder to furnish list of E&C spares(if applicable).
3	Clause no 3.2.1 : General requirements of lighting panel	With ref. to the requirement furnished in clause 3.2.1 of Section II, Bidder to consider the following: 1. All LP shall be provided with provision of manual override. 2. Bus bars of DBs shall be sized to carry continuously the total running load of the system plus a 20% margin. 3. (a) Lighting panels shall be constructed out of 2 mm thick CRCA sheet steel. The door shall be hinged and the panel shall be gasketed to achieve specified degree of protection. Lighting panels shall be powder coated with color shade RAL9002. Lighting panels shall have min. IP55 degree of protection. (b) All MCBs/isolators/Switches/Contactors etc. shall be mounted inside the panel and a fibre glass sheet shall be provided inside the main door such that the operating knobs of MCBs etc., shall project out of it for safe operation against accidental contact. (c) Terminal blocks shall be 1100 V grade, clip-on stud type, made up of polyamide 6.6 or better suitable for terminating multicore 35 or 70 Sq. mm. stranded aluminium conductor incoming cable and 10 Sq. mm. stranded aluminium conductor for each outgoing circuits voltage. All terminals shall be shrouded, numbered and provided with identification strip for the feeders. (d) MCB's shall be current limiting type with magnetic and thermal release suitable for manual closing and automatic tripping under fault condition. MCB's shall have short circuit interrupting capacity of 10 KA rms. MCB knob shall be marked with ON/OFF indication. A trip free release shall be provided to ensure tripping on fault even if the knob is held in ON position. MCB terminal shall be shrouded to avoid accidental contact. (e) DC switches shall be rotary type, 2 pole, continuous duty, load break type, quick make quick break, suitable for 220 V

1553236/2023/PS-PEM-EL

	TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS	SPECIFICATION NO. PE-TS-481/491-558-E002	
		VOLUME II	
		SECTION – I	
	4X210 MW+3X500 MW NTPC KAHALGAON-FGD 2x500 MW NTPC SIPAT FGD SYSTEM	REV. 01	DATE: 23.06.2023
SHEET 5 OF 17			

		<p>DC, 2 wire system. Switch knob shall be provided with ON/OFF indication.</p> <p>(f) Programmable Digital Timer shall be Electronic Astronomical Almanac Time switch with battery back-up of min. TEN years, 4 Digit LED display, 24 hours range, manual override facility, 10 Amp 3 relay output, with NO/NC Contacts suitable for operation on 240V single phase AC supply.</p> <p>(g) Impedance of lighting / Welding transformer shall be so selected that the fault level of lighting /Welding system shall be reduced to 3 to 5 KA.</p>
4	Clause 8.1	<p>Clause 8.1 shall be read as: Standard Quality Plan is enclosed. Inspection shall be carried out as per Quality Plan (0000-999-QOE-S-034) without any implication on cost and delivery. At contract stage, the successful bidder shall submit the same QP for BHEL/ ultimate customer's approval. There shall be no commercial implication to BHEL on account of any changes in QP during contract stage.</p>
5	Clause 8.0	<p>In addition to Clause 8.0, bidder to consider the following: All equipment to be supplied shall be of type tested design. During detail engineering, the contractor shall submit for Owner's approval the reports of all the type tests as listed in this specification and carried out within last ten years from date of bid opening: 04.10.2019. These reports should be for the test conducted on the equipment similar to those proposed to be supplied under this contract and the test(s) should have been either conducted at an independent laboratory or should have been witnessed by a client.</p> <p>However, if the contractor is not able to submit report of the type test(s) conducted within last ten years from the date of bid opening, or in the case of type test report(s) are not found to be meeting the specification requirements, the contractor shall conduct all such tests under this contract at no additional cost to the owner either at third party lab or in presence of client/owners representative and submit the reports for approval.</p> <p>All acceptance and routine tests as per the specification and relevant standards shall be carried out. Charges for these shall be deemed to be included in the equipment price. Selection of samples for type test, acceptance test & routine test and acceptance criteria for all the items shall be as per relevant IS</p>

1553236/2023/PS-PEM-EL

	TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS	SPECIFICATION NO. PE-TS-481/491-558-E002	
		VOLUME II	
		SECTION – I	
	4X210 MW+3X500 MW NTPC KAHALGAON-FGD 2x500 MW NTPC SIPAT FGD SYSTEM	REV. 01	DATE: 23.06.2023
SHEET 6 OF 17			

4.0 DOCUMENTATION

- 4.1 Documents required along with the technical offer: -
- Signed & Stamped copy of Compliance certificate.
 - “Deviation Schedule” with “NO Deviations” and bidder’s signature and company stamp.
 - Signed & stamped copy of unpriced price schedule with “quoted” word indicated against all items.
 - List of E&C Spares (If applicable).
 - All PQR related documents.
- 4.2 Documents required after award of LOI/PO shall be as below (to be submitted by successful bidder).

Drawing No	Drawing Title	Vendor Sub (Days) *	Bhel comment (Days)	Vendor Sub (Days)#	Bhel and Customer comment/approval (Days)
------------	---------------	------------------------	---------------------	--------------------	---

PRIMARY DOCS.

PE-V0-481/491-558-E501	DATA SHEET, GA & SCHEME DRAWING OF LIGHTING DISTRIBUTION BOARDS	11	8	8	18
PE-V0-481/491-558-E902	QUALITY PLAN OF LIGHTING DISTRIBUTION BOARDS	11	8	8	18
PE-V0-481/491-558-E504	DATA SHEET GA & SCHEME DRAWING OF LIGHTING PANEL	11	8	8	18
PE-V0-481/491-558-E904	QUALITY PLAN OF LIGHTING PANEL	11	8	8	18
PE-V0-481/491-558-E507	GA DRAWING OF LIGHTING TRANSFORMER	11	8	8	18
PE-V0-481/491-558-E903	QUALITY PLAN OF LIGHTING TRANSFORMER	11	8	8	18

SECONDARY DOCS.

PE-V0-481/491-558-E508	TYPE TEST REPORTS FOR LIGHTING DISTRIBUTION BOARDS	Submission schedule shall be same as for primary documents.			
PE-V0-481/491-558-E509	TYPE TEST REPORTS FOR LIGHTING PANELS				
PE-V0-481/491-558-E510	TYPE TEST REPORTS FOR LIGHTING TRANSFORMER				
PE-V0-481/491-558-E107	BILL OF MATERIAL				

1553236/2023/PS-PEM-EL



**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION - I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 7 OF 17

NOTE:

* - 1st Submission within indicated days from date of purchase order.

- Submission (within indicated days) after incorporating all BHEL comments.

1. Primary documents shall be considered for delay analysis.
2. Successful bidder to submit 2 sets of above documents. i.e. one for job no. 481- 4X210 MW+3X500 MW NTPC KAHALGAON-FGD & another for job no. 491 - 2x500 MW NTPC SIPAT FGD SYSTEM.


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**
SPECIFICATION NO. PE-TS-481/491-558-E002
VOLUME II
SECTION - I
**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**
REV. 01
DATE: 23.06.2023
SHEET 8 OF 17
DATA SHEET -A

S. No.	Description	Unit	Value
1.0	SYSTEM DESIGN DATA		
1.1	Design ambient	°C	50
1.2	AC Supply		
a)	Rated voltage	V	415
b)	Rated frequency	Hz	50
c)	Voltage variation (permissible)	%	+10% to -10%
d)	Frequency variation (permissible)	%	+5% to -5%
e)	Combined voltage & frequency variation (sum of absolutes permissible)	%	10%
f)	System fault level & duration	kA, sec.	50kA for 1 sec.
1.3	DC Supply		
a)	Rated voltage	V	220
b)	Voltage variation (permissible)	%	+10% to -15%
c)	System fault level and duration	kA, Sec	20kA for 1 sec.
2.0	APPLICABLE STANDARDS		
	IS 60947	Low voltage switchgear and controlgear	
	IS 11171	Dry type transformers	
	IS 13703	Low voltage fuses for voltages not exceeding 1000V AC or 1500 V	
	IS 10118	Code of practice for selection, installation and maintenance of switchgear and controlgear	
	IS 60898	Electrical Accessories - circuit breakers for over protection for household and similar installations	
	IS 1901	Visual indicator lamps	
	IS 60079	Explosive atmospheres	
	IS 5572	Classification of hazardous areas (other than mines) having flammable gases and vapours for electrical installation	
	IS:2551	Danger notice plates	

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**
**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

REV. 01

DATE: 23.06.2023

SHEET 9 OF 17

3.0 LIGHTING/ WELDING DISTRIBUTION BOARDS			
3.1	Operational Front		Single Front
3.2	Type of execution of modules (functional unit)		<input checked="" type="checkbox"/> Fixed <input type="checkbox"/> Draw out
3.3	Type of sheet steel		CRCA
3.4	Sheet metal thickness (minimum)		
a)	Non-load bearing covers	mm	2.0 mm
b)	Non-load bearing partitions	mm	2.0 mm
c)	Load bearing members	mm	2.0 mm
d)	Frames	mm	2.0 mm
e)	Door	mm	2.0 mm
f)	Withdrawable unit (if applicable)	mm	2.0 mm
3.5	Cable alley width (minimum)	mm	250mm (Cable terminations located in cable alley shall be designed to meet the Form IVb Type 7 (as per IEC 61439) for safety purpose)
3.6	Bus bar material		<input checked="" type="checkbox"/> Aluminium grade E 91E
3.7	Earth bus bar material		<input checked="" type="checkbox"/> GI Strip <input type="checkbox"/> Aluminium <input type="checkbox"/> Copper
3.8	Degree of Protection		
a)	Main Panel		IP-54
b)	Transformer cubicle		IP-42 , IP-52 for transformer terminal box.
3.9	Gland plate thickness	mm	3.0
3.10	AC LDB/ WDB		
a)	No. of Incomers		<input type="checkbox"/> One <input checked="" type="checkbox"/> Two *(One incomer for WDB)
b)	Bus coupler required		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
c)	Incomer and Bus coupler rating	A	As per transformer rating
d)	Type of Incomer and Bus coupler		<input type="checkbox"/> TPN SFU <input checked="" type="checkbox"/> TPN MCCB
e)	Type of Outgoing Feeders		<input checked="" type="checkbox"/> TPN SFU <input type="checkbox"/> TPN MCCB


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**
SPECIFICATION NO. PE-TS-481/491-558-E002
VOLUME II
SECTION – I
**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**
REV. 01
DATE: 23.06.2023
SHEET 10 OF 17

f)	Outgoing feeders rating	A	63
g)	Cable entry		<input checked="" type="checkbox"/> Bottom <input type="checkbox"/> Top
3.11	Lighting Transformer		
a)	Rating	kVA	50/ 100
b)	Type of cooling		Air natural
c)	Voltage ratio	V	415/433
d)	Rated frequency	Hz	50
e)	No. of phases		3
f)	Vector group		Dyn1
g)	Off circuit taps		
	Tap range, steps	%	+5% to -5% in steps of 2.5%
	Voltage of each tap	V	As per manufacturer's data
h)	Impedance at rated current, frequency at 75 °C	%	As per IS
i)	Rated current		
	Primary	A	As per manufacturer's data
	Secondary	A	As per manufacturer's data
j)	Transformer type		<input checked="" type="checkbox"/> Cast resin <input type="checkbox"/> Encapsulated <input checked="" type="checkbox"/> Non-Encapsulated
k)	Transformer winding insulation		Class-B or better
l)	Transformer winding insulation temperature rise limit		As per applicable standard
n)	Type of ventilation arrangement provided for transformer enclosure		As per manufacturer's data
o)	Winding conductor material		Copper
p)	Iron loss at 50 Hz and 100% rated voltage	kW	As per manufacturer's data
q)	Copper loss at rated load at 75 °C	kW	As per manufacturer's data
r)	Regulation at full load at 75 °C and 0.8 p.f. lagging		As per manufacturer's data

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 11 OF 17

s)	Weight	kg	As per manufacturer's data
3.12	DC LDB		
a)	No of incomers		<input checked="" type="checkbox"/> One <input type="checkbox"/> Two
b)	DC incomer type		DP Switch fuse unit with contactor
c)	DC incomer rating	A	63
d)	AC incomer type		NA
e)	AC incomer rating		NA
f)	Buscoupler required		<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
g)	Incomer and bus coupler rating	A	63
h)	Type of bus coupler		<input type="checkbox"/> SFU <input type="checkbox"/> DP MCCB
i)	Type of outgoing feeders		<input checked="" type="checkbox"/> DP SFU <input type="checkbox"/> MCCB <input type="checkbox"/> DP MCB
j)	Outgoing feeders rating	A	32
k)	Changeover required in DC LDB		<input type="checkbox"/> Yes (Converter for Conversion of AC to DC) <input checked="" type="checkbox"/> No
l)	Cable entry		<input checked="" type="checkbox"/> Bottom <input type="checkbox"/> Top
4.0	LIGHTING PANELS		
4.1	Application		<input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor <input checked="" type="checkbox"/> Both
4.2	Type of sheet steel		CRCA
4.3	Sheet metal thickness (minimum)		2.0
3.4	Degree of Protection		
a)	Indoor panel		IP-55
b)	Outdoor panel		IP-55, Weatherproof
c)	Canopy in outdoor panel		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
4.5	Bus bar material		<input checked="" type="checkbox"/> Aluminium <input type="checkbox"/> Copper
4.6	Earth bus bar required		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
4.7	Earth bus bar material (if applicable)		<input checked="" type="checkbox"/> GI Strip <input type="checkbox"/> Aluminium <input type="checkbox"/> Copper
4.8	Gland Plate	mm	3.0

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 12 OF 17

4.9	Earthing studs required		<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
4.10	Hinged door with locking facility		<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
4.11	AC Lighting Panel			
a)	Incomer rating	A		63A
b)	Type of Incomer		<input checked="" type="checkbox"/> TPN SFU	<input type="checkbox"/> TPN MCCB
c)	Earth Leakage Circuit Breaker (ELCB) in incomer required		<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
d)	Type of Outgoing Feeders (non-flameproof panel)		<input checked="" type="checkbox"/> SPN MCB	<input type="checkbox"/> TPN MCB *TPN MCB for street lighting panels
e)	Timer required for indoor panel		<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
f)	Timer required for outdoor panel		<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
g)	Outgoing feeders rating	A		20
4.12	DC Lighting panel			
a)	Incomer rating	A		32
b)	Type of incomer		<input checked="" type="checkbox"/> DP SFU	<input type="checkbox"/> DP MCCB
c)	Type of outgoing feeders (non- flameproof panel)			<input checked="" type="checkbox"/> DP MCB
d)	Type of outgoing feeders (flameproof panel)		NOT APPLICABLE	
e)	Outgoing feeders rating	A		20
5.0	COMPONENTS OF LIGHTING SYSTEM EQUIPMENT			
5.1	Moulded Case Circuit Breaker (MCCB)			
a)	Rated voltage	V		415
b)	Number of poles			Refer Sr. No. 3 & 4
c)	Rated short circuit duty	kA		50
d)	Rated breaking capacity (rms)	kA		50
e)	Rated making current (peak)	kA		105
f)	Release with short circuit		<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
g)	Release with overload		<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
h)	Release with under voltage		<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
i)	Auxiliary contacts			

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 13 OF 17

	Numbers	NO+NC	2NO + 2NC
	Rating	A	As per manufacturer data
5.2	Switch-Fuse Unit		
a)	Utilisation category for main contacts		DC23
b)	Number of poles		Double Pole
5.3	Miniature Circuit Breaker		
a)	SPN MCB rating (min)	A	Refer Sl. No. 3 & 4
b)	DP MCB rating (min)	A	Refer Sl. No. 3 & 4
c)	TPN MCB rating (min)	A	Refer Sl. No. 3 & 4
d)	Short time rating	kA	10
e)	Magnetic short circuit protection required		<input checked="" type="checkbox"/> Yes [] No
f)	Thermal overload protection required		<input checked="" type="checkbox"/> Yes [] No
5.4	Current Transformer		
a)	Type		Cast resin
b)	Secondary current rating	A	<input checked="" type="checkbox"/> 1 [] 5
c)	Burden	VA	10
d)	Accuracy class		1.0
e)	Instrument Safety Factor		<5
5.5	Voltage Transformer		
a)	Type		Cast resin
b)	Secondary terminal voltage (phase-phase)	V	110 V
c)	Burden	VA	10
d)	Accuracy class		1.0
e)	Winding configuration		Star/ Star
f)	System grounding		<input checked="" type="checkbox"/> Effective [] Non-effective
5.6	Indicating Meters		
5.6.1	Ammeter		


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 14 OF 17

a)	Type		Analog
b)	Shape		Square
c)	Size		96mm x 96mm
d)	Accuracy		1.0
e)	Current coil rating	A	1
f)	Angle of deflection	deg	90
5.6.2	Voltmeter		
a)	Type		Analog
b)	Shape		Square
c)	Size		96mm x 96mm
d)	Accuracy		1.0
e)	AC voltage coil rating	V	0-500
f)	DC voltage coil rating	V	0-250
g)	Angle of deflection	deg	90
5.7	Power Contactors		
a)	Coil voltage (nominal)		
	AC contactors	V	240
	DC contactors	V	220
b)	Current rating of contacts		
	Power	A	As per manufacturer data
	Control	A	As per manufacturer data
5.8	Under voltage relay		
a)	Type		<input checked="" type="checkbox"/> Electromagnetic <input type="checkbox"/> Static
b)	Coil voltage rating	V	110
c)	Means for in-built testing provided		As per manufacturer data
5.9	Timer		
5.9.1	Time switch		

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 15 OF 17

a)	Type		Digital synchronous
b)	Range	hr	0-24
c)	Coil voltage rating	V	240
5.10	Selector switch		
a)	Type of selector switch		<input checked="" type="checkbox"/> Stay put <input type="checkbox"/> Wing knob
b)	Lockable		<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
5.11	Push Button		
a)	Voltage grade	V	500
b)	Potential free contacts		2NO+2NC
5.12	Indicating Lamps		
a)	Lens Colour		
	ON condition		Red
	OFF condition		Green
b)	Circuit voltage	V	240V
5.13	Cable Glands		By vendor for all incoming and outgoing cables [Cable sizes shall be informed during detail engineering]
a)	Type		<input checked="" type="checkbox"/> Double compression <input type="checkbox"/> Single compression
b)	Material		Heavy duty brass machine finished
c)	Nickel Plating provided		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
d)	Flameproof glands with flameproof equipment		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
5.14	Cable Lugs		By vendor for all incoming and outgoing cables [Cable sizes shall be informed during detail engineering]
a)	Type		Crimping type/ ring type
b)	Material		Tinned copper
6.0	PAINTING		
6.1	Paint shade		
a)	LDBs		Two coats of Red oxide primer followed by two coats of Powder coated, colour shade 9002
b)	LPs		Two coats of Red oxide primer followed by two

1553236/2023/PS-PEM-EL


**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION – I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 16 OF 17

			coats of Powder coated, colour shade 9002
6.2	Paint Finish		
a)	Interior		<input type="checkbox"/> Matt <input checked="" type="checkbox"/> Semi-glossy
b)	Exterior		<input checked="" type="checkbox"/> Semi-glossy <input type="checkbox"/> Full-glossy
6.3	Paint Thickness	Microns	50 (minimum)

Note:

MCCB shall be provided with Microprocessor based releases.

1553236/2023/PS-PEM-EL

**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-TS-481/491-558-E002

VOLUME II

SECTION - I

**4X210 MW+3X500 MW NTPC KAHALGAON-FGD
2x500 MW NTPC SIPAT FGD SYSTEM**

REV. 01

DATE: 23.06.2023

SHEET 17 OF 17

ANNEXURE-1**SUB-VENDOR LIST**

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
ES1	AC CONTACTORS	1	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	AC CONTACTORS	2	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	AC CONTACTORS	3	E1144	TELEMECHANIQUE/SCHNEIDER	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	TAKEN OVER BY SCHNEIDER
	AC CONTACTORS	4	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	AC CONTACTORS	5	B04	BCH	20/4, MATHURA ROAD, FARIDABAD, HARYANA-121006	0129-4293000	
ES2	AC LOAD BREAK SWITCH	1	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	AC LOAD BREAK SWITCH	2	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	AC LOAD BREAK SWITCH	3	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	AC LOAD BREAK SWITCH	4	E1076	KAYCEE	KAYCEE INDUSTRIES LTD., C/O-CMS COMPUTERS LTD., 35A, REAR BLDG., KILOKARI, NEW DELHI-110014	Rajiv Sharma-9312004687	
	AC LOAD BREAK SWITCH	5	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011-3088 7520-29	
ES3	AC MCCB	1	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011-3088 7520-29	
	AC MCCB	2	S03	SCHNEIDER	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	AC MCCB	3	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	AC MCCB	4	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	AC MCCB	5	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	AC MCCB	6	C02	CROMPTON GREAVES	RAIL TRANSPORTATION SYSTEMS, VANDANA BUILDING, 11, TOLSTOY MARG, TOLSTOY MARG, NEW DELHI, DL 110001	011 3041 6300	
ES7	AUXILIARY RELAYS	1	A24	ABB	14, MATHURA ROAD, FARIDABAD, HARYANA-121003	0129-2567580, 09871799449	
	AUXILIARY RELAYS	2	G01	ALSTOM LTD	A-7, SEC-65, NOIDA	0120-479 0000	
	AUXILIARY RELAYS	3	E1075	JYOTI LTD.	JYOTI LIMITED, E&CS DIVISION, 3/15, BIDC, GORWA, VADODARA - 390 016, E-MAIL ID: ECS@JYOTI.COM	Ph. No.: +91-265-2281214 , Fax No.: +91-265-2281214	
	AUXILIARY RELAYS	4	E1099	OEN INDIA LTD	29/1479, VYTILLA, COCHIN - 682 019 KERALA, INDIA	Phone : +91 484 2301132, 2303709 Fax : +91 484 2302287, 2302221 sales@oenindia.com	
	AUXILIARY RELAYS	5	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	BIMETAL RELAYS	1	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
ES8	BIMETAL RELAYS	2	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	BIMETAL RELAYS	3	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	BIMETAL RELAYS	4	E1144	TELEMECHANIQUE/SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	TAKEN OVER BY SCHNEIDER
ES11	CABLE GLANDS	1	E1201	ALLIED TRADERS & EXPORTERS	C-124 A, SECTOR-2, NOIDA -201 301, UTTAR PRADESH, INDIA	Mr. Vijay Mohan Sood +(91)-(120)-2525694 +(91)-(120)-3052594 +(91)-(11)-23287156	
	CABLE GLANDS	2	E1017	ARUP ENGG & FOUNDRY WORKS	391/119, PRINCE ANWAR SHAH ROAD, CALCUTTA-700068	033 2473 0850	
	CABLE GLANDS	3	E1206	BALIGA LIGHTING EQPT.PVT.LTD.	63A, CP RAMASWAMY ROAD, ALWARPET, P. B.No 6910, CHENNAI-600018	44-24995505, 22680990-4	
	CABLE GLANDS	4	E1036	COMMET BRASS PRODUCTS	NUTAN CHEMICAL COMPOUND, WALBHAT ROAD, GOREGAON, MUMBAI 400063	91-022-26852961/62/63 comet@vsnl.net	
	CABLE GLANDS	5	DW08	DOWELLS	M/S. DOWELLS ELECTRICALS 47/47A, SATGURU INDUSTRIAL ESTATE. OFF AAREY ROAD, GOREGOAN (EAST). MUMBAI 400 063.	CEO : Mr. Jayantibhai S. Patel TEL: 022-32504770, /022-29270876/ 022-29270878.	
	CABLE GLANDS	6	E1044	ELECTROMAC INDUSTRIES	27/28AF NEW EMPIRE IND. ESTT., R.KRISHNA MANDIR RD.JB NGR ,ANDHERI(E),MUMBAI-400059	91-22-28324829 / 66919034 devang@electromacglands.com	
	CABLE GLANDS	7	I01	INCAB	HARE STREET, KOLKATA, WEST BENGAL-700001	91-33-2480161/62/63/64 : 91-33-2485766	Fax
ES12	CABLE LUGS	1	E1040	DOWELLS	M/S. DOWELLS ELECTRICALS 47/47A, SATGURU INDUSTRIAL ESTATE. OFF AAREY ROAD, GOREGOAN (EAST). MUMBAI 400 063.	CEO : Mr. Jayantibhai S. Patel TEL: 022-32504770, /022-29270876/ 022-29270878.	
	CABLE LUGS	2	E1149	UNIVERSAL MACHINES LTD.	4, B. B. D. BAG (EAST) 90, STEPHEN HOUSE, 5TH FLR CALCUTTA-700001	033 2282 2540	
ES13	D.C. MCCB	1	C02	CROMPTON GREAVES	RAIL TRANSPORTATION SYSTEMS, VANDANA BUILDING, 11, TOLSTOY MARG, TOLSTOY MARG, NEW DELHI, DL 110001	011 3041 6300	
	D.C. MCCB	2	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	D.C. MCCB	3	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	D.C. MCCB	4	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
ES14	EARTH LEAKAGE CB	1	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	EARTH LEAKAGE CB	2	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	EARTH LEAKAGE CB	3	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	EARTH LEAKAGE CB	4	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	EARTH LEAKAGE CB	5	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011-3088 7520-29	
	EARTH LEAKAGE CB	6	A24	ABB	14, MATHURA ROAD, FARIDABAD, HARYANA-121003	0129-2567580, 09871799449	

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
	EARTH LEAKAGE CB	7	E1068	INDO ASIAN	B-24, PHASE - II , NOIDA - 201305, U.P.	120-3042222	
	EARTH LEAKAGE CB	8	E1088	MDS SWITCHGEAR LTD	314-3175 SHAH NAHAR ESTATE	011 - 25793021	
	EARTH LEAKAGE CB	9	E1120	S&S POWER SWITCHGEAR LTD,	NEW NO. 67, OLD NO. 19, DR. RANGA ROAD, MYLAPORE, CHENNAI - 600004	044 - 24988056, 044 - 24988058	
ES20	DC CONTACTORS	1	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	DC CONTACTORS	2	E1030	BHEL (BHOPAL)	HEAVY ELECTRICAL PLANT		
	DC CONTACTORS	3	E1044	ELECTROMAC INDUSTRIES	27/28AF NEW EMPIRE IND.ESTT., R.KRISHNA MANDIR RD.JB NGR ANDHERI(E),MUMBAI-400059	91-22-28324829 / 66919034 devang@electromacglands.com	
	DC CONTACTORS	4	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	DC CONTACTORS	5	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	DC CONTACTORS	6	E1144	TELEMECHANIQUE/ SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	TAKEN OVER BY SCHNEIDER
	DC CONTACTORS	7	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
ES21	CONTROL SWITCHES/ SELECTOR SWITCH	1	E1076	KAYCEE	KAYCEE INDUSTRIES LTD., C/O-CMS COMPUTERS LTD., 35A, REAR BLDG., KILOKARI, NEW DELHI-110014	Rajiv Sharma-9312004687	
	CONTROL SWITCHES/ SELECTOR SWITCH	2	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	CONTROL SWITCHES/ SELECTOR SWITCH	3	G01	ALSTOM LTD	A-7, SEC-65, NOIDA	0120-479000	
	CONTROL SWITCHES/ SELECTOR SWITCH	4	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	CONTROL SWITCHES/ SELECTOR SWITCH	5	SRC01	M/s Shrenik & Co.	39A/3, PANCHRATNA INDUSTRIAL ESTATE, SARKHEJ-BAVLA ROAD, CHANGODAR, AHMEDABAD - 382 213		
	CONTROL SWITCHES/ SELECTOR SWITCH	6	RE05	RECOM PVT. LTD.	M/S RECOM PVT. LTD.,16A , 2ND FLOOR A, WING RAJ INDUSTRIAL COMPLEX, MILITARY ROAD , MAROL ANDHERI (EAST),MUMBAI ,MAHARASHTRA STATE	Mr. Chandrashekar Kamath (MD) : 09820249503	
ES23	LT- CURRENT TRANSFORMER	1	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	LT- CURRENT TRANSFORMER	2	E1009	AUTOMATIC ELECTRIC LTD.	96 AB LONAVLA INDUSTRIAL ESTATE NANGARGAON, LONAVLA-410401	Phone : +91 2114323665 Fax : +91 2114273482	
	LT- CURRENT TRANSFORMER	3	E1066	INDCOIL	PLOT NO. A- 150/ 151, 23RD U ROAD, WAGLE ESTATE, THANE WEST, CST RD, FRIENDS COLONY, HALLOW PUL, KURLA WEST, MUMBAI, MAHARASHTRA	Phone:022 2583 8305	
	LT- CURRENT TRANSFORMER	4	K18	KAPPA ELECTRICALS	KAPPA ELECTRICALS, KAPPA CONSOLIDATED PVT. LTD., SOUTHERN ELECTRIKS 14, CART TRACK ROAD,	PHONE: +91 - 44 - 22454709, 22454516, 22450794, 22450795 FAX: +91 - 44 - 22351662, 22451693 E-MAIL: mira@kappaelectricals.com	
	LT- CURRENT TRANSFORMER	5	E1104	PRAGATI ELECTRICALS	280/3,II POKHRAN RD	5341779,5427041	
	LT- CURRENT TRANSFORMER	6	E1106	PRECISE ELECTRICALS	47A-49A,CHAKALA ROAD ANDHERI(E),MUMBAI-99 MUMBAI, MAHARASHTRA, INDIA PIN-400 099	022-8323402 / 022-8216433	

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
	LT- CURRENT TRANSFORMER	7	E1128	SILKAANS ELECT.MFG.CO.PVT. LTD	PLOT NO: R-247, T.T.C. INDUSTRIAL AREA, M.I.D.C , RABALE, NAVI MUMBAI- 400 701 INDIA	+91-22- 27607787 / 27607927 +91-22- 27607997	
	LT- CURRENT TRANSFORMER	8	E1111	PRAYOG ELECTRICALS PVT. LTD.	GROUND FLOOR, THAKORE INDUSTRIAL COMPUND, STATION ROAD, VIDYA VIHAR (W), NATHANI ROAD , OPP. AMIBIKA TEMPLE,MUMBAI Mumbai -	91-22-25164288/25133146 Mr. P. U. PATWARDHAN (MANAGING DIRECTOR)	
	LT- CURRENT TRANSFORMER	9	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011-3088 7520-29	
	LT- CURRENT TRANSFORMER	10	NK09	M/s Newtek Electricals	M-90, M.I.D.C, Waluj, Aurangabad 431136, Maharashtra, India	Tel/Fax: +91 240 2551555 E-mail: mkt.north@newtekelectricals.com, sales@newtekelectricals.com	
ES24	LT- POTENTIAL TRANSFORMER	1	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	LT- POTENTIAL TRANSFORMER	2	E1009	AUTOMATIC ELECTRIC LTD.	96 AB LONAVLA INDUSTRIAL ESTATE NANGARGAON, LONAVLA-410401	Phone : +91 2114323665 Fax : +91 2114273482	
	LT- POTENTIAL TRANSFORMER	3	E1066	INDCOIL	PLOT NO. A- 150/ 151, 23RD U ROAD, WAGLE ESTATE, THANE WEST, CST RD, FRIENDS COLONY, HALLOW PUL, KURLA WEST, MUMBAI, MAHARASHTRA	Phone:022 2583 8305	
	LT- POTENTIAL TRANSFORMER	4	K18	KAPPA ELECTRICALS	KAPPA ELECTRICALS, KAPPA CONSOLIDATED PVT. LTD., SOUTHERN ELETRIKS 14, CART TRACK ROAD,	PHONE: +91 - 44 - 22454709, 22454516, 22450794, 22450795 FAX: +91 - 44 - 22351662, 22451693 E-MAIL: mira@kappaelectricals.com	
	LT- POTENTIAL TRANSFORMER	5	E1104	PRAGATI ELECTRICALS	280/3,II POKHRAN RD	5341779,5427041	
	LT- POTENTIAL TRANSFORMER	6	E1106	PRECISE ELECTRICALS	47A-49A,CHAKALA ROAD ANDHERI(E),MUMBAI-99 MUMBAI, MAHARASHTRA, INDIA PIN-400 099	022-8323402 / 022-8216433	
	LT- POTENTIAL TRANSFORMER	7	E1128	SILKAANS ELECT.MFG.CO.PVT. LTD	PLOT NO: R-247, T.T.C. INDUSTRIAL AREA, M.I.D.C , RABALE, NAVI MUMBAI- 400 701 INDIA	+91-22- 27607787 / 27607927 +91-22- 27607997	
	LT- POTENTIAL TRANSFORMER	8	E1111	PRAYOG ELECTRICALS PVT. LTD.	GROUND FLOOR, THAKORE INDUSTRIAL COMPUND, STATION ROAD, VIDYA VIHAR (W), NATHANI ROAD , OPP. AMIBIKA TEMPLE,MUMBAI Mumbai -	91-22-25164288/25133146 Mr. P. U. PATWARDHAN (MANAGING DIRECTOR)	
	LT- POTENTIAL TRANSFORMER	9	NK09	M/s Newtek Electricals	M-90, M.I.D.C, Waluj, Aurangabad 431136, Maharashtra, India	Tel/Fax: +91 240 2551555 E-mail: mkt.north@newtekelectricals.com, sales@newtekelectricals.com	
ES25	DC SWITCH	1	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	DC SWITCH	2	E1076	KAYCEE	KAYCEE INDUSTRIES LTD., C/O-CMS COMPUTERS LTD., 35A, REAR BLDG., KILOKARI, NEW DELHI-110014	Rajiv Sharma-9312004687	
	DC SWITCH	3	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
ES26	DISTRIBUTION BOX	1	SRC01	M/S SHRENIK & CO.	39A/3, PANCHRATNA INDUSTRIAL ESTATE, SARKHEJ-BAVLA ROAD, CHANGODAR, AHMEDABAD – 382 213		
ES28	FUSE BASE	1	E1068	INDO ASIAN	B-24, PHASE - II , NOIDA - 201305, U.P.	120-3042222	
	FUSE BASE	2	G01	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	FUSE BASE	3	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	FUSE BASE	4	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011-3088 7520-29	
	FUSE BASE	5	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 ,amit.bhadauria@siemens.com	
	FUSE BASE	6	A24	ABB	14, MATHURA ROAD, FARIDABAD, HARYANA-121003	0129-2567580, 09871799449	

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
	FUSE BASE	7	S02	SPACEAGE SWITCHGEARS LTD.	68 & 13-A INDUSTRIAL DEVELOPMENT COLONY, MEHRAULI ROAD GURGAON, HARYANA-122001	0124-2302711, 4085091	
	FUSE BASE	8	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	FUSE BASE	9	G01	ALSTOM LTD	A-7, SEC-65, NOIDA	0120-479 0000	
	FUSE BASE	10	E1050	ESSEN DEINKI	FLAT NO. 502, SKYLINE HOUSE 85, NEHRU PLACE NEW DELHI	011-26217060	
ES29	HRC FUSES	1	E1068	INDO ASIAN	B-24, PHASE - II , NOIDA - 201305, U.P.	120-3042222	
	HRC FUSES	2	G01	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	HRC FUSES	3	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	HRC FUSES	4	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011-3088 7520-29	
	HRC FUSES	5	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 ;amit.bhadauria@siemens.com	
	HRC FUSES	6	A24	ABB	14, MATHURA ROAD, FARIDABAD, HARYANA-121003	0129-2567580, 09871799449	
	HRC FUSES	7	S02	SPACEAGE SWITCHGEARS LTD.	68 & 13-A INDUSTRIAL DEVELOPMENT COLONY, MEHRAULI ROAD GURGAON, HARYANA-122001	0124-2302711, 4085091	
	HRC FUSES	8	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	HRC FUSES	9	G01	ALSTOM LTD	A-7, SEC-65, NOIDA	0120-479 0000	
	HRC FUSES	10	E1050	ESSEN DEINKI	FLAT NO. 502, SKYLINE HOUSE 85, NEHRU PLACE NEW DELHI	011-26217060	
ES31	GI WIRE & FLAT	1	I039	INDUSTRIAL PERFORATION (I) PVT.LTD.	MR. A. K. SAHA 327, R.N.GUHA ROAD, DUM DUM KOLKATA-West Bengal-India Phone- 9830241788 Pincode : 700028 Email : ipipl@cal2.vsnl.net.in	011 2737 3579	
	GI WIRE & FLAT	2	I070	INDIA ELECTRICALS SYNDICATE	Mr. Suresh Kumar Agarwal 55, Ezra Street, Kolkata-West Bengal-India Phone- 033-22354047 Pincode : 700001 Email : cabletray@vsnl.com	022-28511704	
	GI WIRE & FLAT	3	I072	INDMARK FORMTECH PVT. LTD.	Mr. Narendra R. Meher J Block, Plot No. 375, MIDC BHOSARI PUNE-MAHARASHTRA-INDIA Phone- 020-27130546 Pincode : 411026 Email : indmarkformtech@vsnl.net		
	GI WIRE & FLAT	4	P039	PREMIER POWER PRODUCTS (CAL) PVT. LTD.	Chatterjee International Centre, 33A, Jawaharlal Nehru Road, 6th Floor, Suit No. - 11A, Kolkata, -West Bengal-India Phone- 9331008739 Pincode : 700071 Email : hemantdaga@dagaventures.com		
	GI WIRE & FLAT	5	P050	PATNY SYSTEMS (P) LTD	PATNY PLAZA 160 , SARDAR PATEL ROAD SEUNDRABAD SECUNDRABAD-TELANGANA-INDIA Phone- 040-27902451 Pincode : 500003 Email : mr.mkt@patnysystems.com		
	GI WIRE & FLAT	6	P079	PASSIVE INFRA PROJECTS PVT. LTD.	MR. VARUN AGRAWAL 182, VAISHALI, PITAMPURA Delhi-DELHI-INDIA Phone- 9871183059 Pincode : 110088 Email : ATANU.SAHA@PASSIVEINFRA.COM		
	GI WIRE & FLAT	7	R036	RUKMANI ELECTRICAL & COMPONENTS PVT LTD	11A , MAHARISHI DEBENDRA ROAD 1ST FL , ROOM NO.4 KOLKATA-WEST BENGAL-INDIA Phone- Pincode : 700007 Email : maruthikabra@gmail.com		

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
	GI WIRE & FLAT	8	R037	RATAN PROJECTS & ENGINEERING CO. PVT.LTD.	MR. G.D. SINGHEE/MR. MAHESH SINGHEE 26, P.K. TAGORE STREET, MAIN BUILDING KOLKATA-WEST BENGAL-INDIA Phone- 9830177331 Pincode : 700006 Email : mahesh@ratans.com		
	GI WIRE & FLAT	9	R041	RABI ENGINEERING WORKS PVT. LTD.	MR. TAPAN KUMAR SEN/MR. SIDDHARTHA 327, R.N. GUHA ROAD, DUM DUM, KOLKATA-WEST BENGAL-INDIA Phone- 9748753002 Pincode : 700028 Email : rabiengineering@gmail.com		
	GI WIRE & FLAT	10	R200	RAJASTHAN METAL SMELTING CO.	Mr. R. K. Tibrewala D-80, Road No. 7, V.K.I.A., Jaipur-Rajasthan-India Phone-0141-2332269 Pincode : 302013 Email : info@rmscoindia.com		
	GI WIRE & FLAT	11	S210	SARAL INDUSTRIES	Mr. Y.K. Gupta L-1, L-2, Industrial Area-1 Sultanpur Road Rae Bareilly-Uttar Pradesh-India Phone- 0535-2702474 Pincode : 229010 Email : saralindustries@gmail.com		
	GI WIRE & FLAT	12		PARCO Engineers Pvt. Ltd.	401, skyline Epitom Building ,Near to Jolly Gym Khana, Kirol Road , Vidhyavihar, MH 400086 India		
	GI WIRE & FLAT	13	U019	UNITECH FABRICATORS and ENGINEERS PVT LTD	INDRAPRASHTHA APARTMENT 24 , M.B.RAOD , BIRATI KALABAGAN KOLKATA KOLKATA-WEST BENGAL-INDIA Phone- Pincode : 700051 Email : ufepl@vsnl.net; ufepl@rediffmail.com	022 - 26230814	
ES33	IND. POWER & WLDG SOCKETS	1	C02	CROMPTON GREAVES	3RD FLOOR, EXPRESS BUILDING,9-10, BAHADUR SHAH ZAFAR MARG, NEAR ITO CROSSING,NEW DELHI-110002, INDIA	91 11 23460700 - 999 'Sunil.Das@cgglobal.com	
	IND. POWER & WLDG SOCKETS	2	E1207	CYCLO ELECTRIC DEVICE & SERV.CO.	: A-3, NEAR ANTHEM BIOSCIENCE, KSSIDC INDUSTRIAL AREA, BOMMASANDRA, BOMMASANDRA INDUSTRIAL AREA, BANGALORE,	Mr. H.Jaishanker +919845039081, 080 - 27833102 , 080 - 27833103 : +91 80 41460985 'cycloelectric@gmail.com	
	IND. POWER & WLDG SOCKETS	3	B04	BCH	20/4, MATHURA ROAD, FARIDABAD - 121006, HARYANA, INDIA	0(129)-4063000, 9015800189(Ramesh Giri) 'ramesh.giri@bchindia.com	
	IND. POWER & WLDG SOCKETS	4	B02	BEST & CROMPTON	Best & Crompton Engineering Ltd 28C, Ambattur Industrial Estate (North) Ambattur, Chennai - 600 098	Ph : +91 44 4551 4724 , MRKT DGM Mr. VI Raj:- 9840593411 'bestcromptonviraj@gmail.com	BEST & CROMPTON ENGINEERING LTD 28C, AMBATTUR
	IND. POWER & WLDG SOCKETS	5	A03	AJMERA INDUSTRIES & ENGG. WORKS	AJMERA INDL. AND ENGG. WORKS. AJMERA HOUSE, A-61 / KHAIRANE MIDC. , TTC INDL. AREA, NAVI MUMBAI - 400705.	Tel : 022 27620299 / 97 / 96 'mail@ajmera.net	
ES34	INTERPOSING RELAY	1	A24	ABB	14, MATHURA ROAD, FARIDABAD, HARYANA-121003	0129-2567580, 09871799449	
	INTERPOSING RELAY	2	G01	ALSTOM LTD	A-7, SEC-65, NOIDA	0120-479 0000	
	INTERPOSING RELAY	3	E1075	JYOTI LTD.	JYOTI LIMITED, E&CS DIVISION,3/15, BIDC, GORWA,VADODARA - 390 016, E-MAIL ID: ECS@JYOTI.COM	Ph. No.:+91-265-2281214 , Fax No.:+91-265-2281214	
	INTERPOSING RELAY	4	E1099	OEN INDIA LTD	29/1479, VYTILLA, COCHIN - 682 019 KERALA, INDIA	Phone : +91 484 2301132, 2303709 Fax : +91 484 2302287, 2302221 sales@oenindia.com	
	INTERPOSING RELAY	5	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	INDICATING LAMPS	1	B04	BCH	20/4, MATHURA ROAD, FARIDABAD, HARYANA-121006	0129-4293000	
	INDICATING LAMPS	2	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	6832259,6918834-37	
	INDICATING LAMPS	3	E1050	ESSEN DEINKI	FLAT NO. 502, SKYLINE HOUSE 85, NEHRU PLACE NEW DELHI	011-26217060	

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
ES35	INDICATING LAMPS	4	E1153	VAISHNO(HOTLINE SWGR.& CONTROL)	G-19, SECTOR - 11, NOIDA - 201301, UTTAR PRADESH, INDIA	8377805157 9818338922	
	INDICATING LAMPS	5	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	9818338922	
	INDICATING LAMPS	6	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	INDICATING LAMPS	7	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
ES45	LIGHTING SWITCH , SOCKET & S/F UNIT	1	F04	ELEXPLO ELECTRICALS PVT/ LTD.	C 1/27 & 37 GIDC KABILPORE NAVSARI-396424	02637-265140, Mr. Jssk kumar	
	LIGHTING SWITCH , SOCKET & S/F UNIT	2	E1012	ANCHOR	STEEL HOUSE, B WING, PLOT NO. 24, MAHAL INDUSTRIAL ESTATE, MAHAKALI CAVES ROAD, NEAR PAPER BOX, ANDHERI (E), MUMBAI,	022-30418888.	
	LIGHTING SWITCH , SOCKET & S/F UNIT	3	E1076	KAYCEE	KAYCEE INDUSTRIES LTD., C/O-CMS COMPUTERS LTD., 35A, REAR BLDG., KILOKARI, NEW DELHI-110014	Rajiv Sharma-9312004687	
	LIGHTING SWITCH , SOCKET & S/F UNIT	4	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	LIGHTING SWITCH , SOCKET & S/F UNIT	5	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	LIGHTING SWITCH , SOCKET & S/F UNIT	6	E1068	INDO ASIAN	B-24, PHASE - II , NOIDA - 201305, U.P.	120-3042222	
ES46	LIGHTING TRANSFORMER	1	E1021	AUTOMATIC ELECTRIC LTD.	ADDRESS : 96 AB LONAVLA INDUSTRIAL ESTATE NANGARGAON, LONAVLA-410401	Phone : +91 2114323665 Fax : +91 2114273482	
	LIGHTING TRANSFORMER	2	E1066	INDCOIL	PLOT NO. A- 150/ 151, 23RD U ROAD, WAGLE ESTATE, THANE WEST, CST RD, FRIENDS COLONY, HALLOW PUL, KURLA WEST, MUMBAI, MAHARASHTRA	Phone:022 2583 8305	
	LIGHTING TRANSFORMER	3	E1103	POWER PACK ENTERPRISES	POWER PACK ENTERPRISES MR. NEHAL SHAH / MR. SHARAD SHAH (PARTNER) NO. 3, JAYSHREE SADAN, 1ST FLOOR,	Call Us:08447573761 Mobile: +(91)-9821787821 +(91)-9821035604	
	LIGHTING TRANSFORMER	4	E1155	VIJAY ELECTRICALS LTD.	6-3-648/1&2, OFF RAJ BHAVAN ROAD, SOMAJIGUDA, HYDERABAD - 500 082. ANDHRA PRADESH, INDIA.	Vijay Electricals Mr. Bharat Giri / Ajay Giri (CEO) B 79, Gali No. 60, Sanjay Colony,	
	LIGHTING TRANSFORMER	5	E1057	GILBERT & MAXWELL	WORKS PLOT G-28 , M.I.D.C., AMBAD NASHIK - 422010, MAHARASHTRA, INDIA	Mr. Sanjeev Kulkarni, (Marketing Manager) Cell: 9822586724 sanjeevkulkarni@gilbert-maxwell.in Phone : + 91 - 253 - 238 25 51	
	LIGHTING TRANSFORMER	6	K18	KAPPA ELECTRICALS	KAPPA ELECTRICALS, KAPPA CONSOLIDATED PVT. LTD., SOUTHERN ELECTRIKS 14, CART TRACK ROAD,	PHONE: +91 - 44 - 22454709, 22454516, 22450794, 22450795 FAX: +91 - 44 - 22351662, 22451693 E-MAIL: mira@kappaelectricals.com	
	LIGHTING TRANSFORMER	7	AIE01	Ames Impex Electricals Pvt. Ltd	C-1B/1207, PHASE IV, GIDC NARODA, AHMEDABAD, GUJARAT 382330	Phone:079 2282 1648	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	8	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	9	E1019	ASIATIC	A-58 NARAINA IND. AREA, PHASE-I , NEW DELHI 110028	011 - 25796330, 25796617	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	10	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011 - 25793021	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	11	E1051	EVERGREEN ENGG. CO.	EVERGREEN ENGG COMPANY WORKS-5, PLOT NO. 9,10,11,12, SURVEY NO. 242, CHINCH PADA, VASAI EAST-401208	(0250) 6458250	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	12	E1143	TECKNIC CONTROLS	703, MADHAVA, BANDRA, KURLA COMPLEX, BANDRA EAST, MUMBAI, MAHARASHTRA 400051	022-42532507/00 022-24451648	

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
ES47	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	13	E1053	EX-PROTECTA LIGHTING EQUIPMENT	305-306, GIDC ESTATE, VITHAL UDYOGNAGAR - 388121 DIST. ANAND, GUJARAT 388121 INDIA	02692-237823	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	14	E1206	BALUGA ELECTRICALS	63A,CP RAMASWAMY ROAD, PB NO 6910, CHENNAI-600018	44-24995505,22680990-4	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	15	E1210	ENPRO ENGG.	NO.995P, DIAMOND PLAZA, 2ND FLOOR, 12TH MAIN ROAD, ANNA NAGAR, CHENNAI-40	044 - 42611526 / 42170338 / 26262716 enproengg@enproengineering.com	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	16	E1132	STERLING SWGR CONTROL PVT.LTD.	P.O. BOX NO. 17023, SORAB HOUSE, 2ND FLOOR, 555, S.B. MARG, DADAR, MUMBAI - 400028, MAHARASHTRA, INDIA	91-22-24222297/24222298/24224236	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	17	F04	ELEXPRO ELECTRICALS PVT/ LTD.	C 1/27 & 37 GIDC KABILPORE NAVSARI-396424	02637-265140, Mr. Jssk kumar	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	18	E1153	VAISHNO(HOTLINE SWGR & CONTROL)	G-19, SECTOR - 11, NOIDA - 201301, UTTAR PRADESH, INDIA	8377805157 9818338922	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	19	J01	JASPER ENGINEERS PVT. LTD.	A-23, SECTOR - 8, NOIDA-201301	0120-4033520/533	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	20	KM1	KMG ATOZ SYSTEMS	C-49, SECTOR-81-NOIDA-201305	120-4207920, 08527897328	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	21	E05	UNILEC ENGINEERS PVT. LTD.	BEHRAMPUR INDUSTRIAL AREA, BEGAMPUR KHATOLA ROAD, GURGAON-122001	0124-4030247,248, 4559700, 9911087173	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	22	B04	BCH	20/4, MATHURA ROAD, FARIDABAD, HARYANA-121006	0129-4293000	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	23	E1035	CANDS	1/202, ANSA INDUSTRIAL ESTATE, SAKI VIHAR ROAD, SAKINAKA, ANDHERI (EAST), MUMBAI-72	022-28570858	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	24	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	25	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	26	E1143	TECKNIC CONTROLS	703, MADHAVA, BANDRA, KURLA COMPLEX, BANDRA EAST, MUMBAI, MAHARASHTRA 400051	022-42532507/00 022-24451648	
	LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	27	E1148	UNITED ELECTRIC	97 UDYOG VIHAR PHASE-I, GURGAON 122015, HARYANA	124 4002970 72	
LOCAL PUSH BUTTON STATION (NON FLAME PROOF)	28	SRC01	M/s Shrenik & Co.	39A/3, PANCHRATNA INDUSTRIAL ESTATE, SARKHEJ-BAVLA ROAD, CHANGODAR, AHMEDABAD - 382 213			
ES51	MCB	1	E1088	MDS SWITCHGEAR LTD	314-317SHAH NAHAR ESTATE	011 - 25793021	
	MCB	2	E1068	INDO ASIAN	B-24, PHASE - II , NOIDA - 201305, U.P.	120-3042222	
	MCB	3	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	MCB	4	E1120	S&S POWER SWITCHGEAR LTD,	NEW NO. 67, OLD NO. 19, DR. RANGA ROAD, MYLAPORE, CHENNAI - 600004	044 - 24988056, 044 - 24988057, 044 24988058	
ES52	MCC (FIXED TYPE)	1	S02	SPACEAGE SWITCHGEARS LTD.	68 & 13-A INDUSTRIAL DEVELOPMENT COLONY, MEHRAULI ROAD GURGAON, HARYANA-122001	0124-2302711, 4085091	
	MCC (FIXED TYPE)	2	A01	ASSOCIATED SWGR & PROJ.LTD.	C-10, UPSIDC, INDUSTRIAL AREA, SITE-IV, KASNA ROAD, GREATER NOIDA-201306	0120-4294618,19,20 Asplho@gmail.com	
	MCC (FIXED TYPE)	3	B04	BCH	20/4, MATHURA ROAD, FARIDABAD, HARYANA-121006	0129-4293000	

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
ES61	SWITCH BOX	1	E1012	ANCHOR	STEEL HOUSE, B WING, PLOT NO. 24, MAHAL INDUSTRIAL ESTATE, MAHAKALI CAVES ROAD, NEAR PAPER BOX, ANDHERI (E), MUMBAI, MAHARASHTRA.- 400093	022-30418888.	
	SWITCH BOX	2	F04	ELEXPLO ELECTRICALS PVT/ LTD.	C 1/27 & 37 GIDC KABILPORE NAVSARI-396424	02637-265140, Mr. Jssk kumar	
	SWITCH BOX	3	B05	BAJAJ ELECTRICALS	BAJAJ ELECTRICALS LTD. ENGINEERING & PROJECTS BU (NORTH) 3rd FLOOR, GULMOHARHOUSE, COMMUNITY CENTRE 161/B-4, GAUTAM NAGAR, YUSUF SARAI NEW DELHI -- 110049	CONTACT PERSON : Mr. S. SREEMANY. SR. MANAGER (PROJECTS) CONTACT DETAILS : (+91) 9871025705. MAIL ID : srbans@bajajelectricals.com;	
	SWITCH BOX	4	A03	AJMERA INDUSTRIES & ENGG. WORKS	AJMERA INDL. AND ENGG. WORKS. AJMERA HOUSE, A-61 / KHAIRANE MIDC. , TTC INDL. AREA, NAVI MUMBAI -- 400705.	Tel : 022 27620299 / 97 / 96 'mail@ajmera.net	
	SWITCH BOX	5	S802	S.B. ELECTRICAL ENGINEERING CORPORATION	03, SARDAR GRIHA BUILDING, LOHAR CHAWAL, MUMBAI-400002	022- 22069831; 022-66637259	
ES62	TERMINAL BLOCKS	1	C01	WAGO-CONTROLS	C 27, GREATER NOIDA, SECTOR 58, C BLOCK, SECTOR 58, NOIDA, UTTAR PRADESH 201307	0120-2580409/10	
	TERMINAL BLOCKS	2	E1038	CONNECT WELL	309A/4, 3RD FLOOR, KALKAJI, OKHLA IND AREA PH-2, GOVINDPURI, NEW DELHI, DL 110019	9811881085 09871419996 011-65908877	
	TERMINAL BLOCKS	3	E1047	ELMEX CONTROLS PVT. LTD.	12,G.I.D.C.ESTATE,MUKARPURA ROAD,VADODARA-390010	9374631074	
	TERMINAL BLOCKS	4	E1050	ESSEN DEINKI	FLAT NO. 502, SKYLINE HOUSE 85, NEHRU PLACE NEW DELHI	011-26217060	
	TERMINAL BLOCKS	5	E1142	TECHNOPLAST	OPP.I.M.INTER COLLEGE, BEGUM SARAI KHURD ROAD, AMROHA - 244221, U.P.	PH:- 05922 264006 CELL NO:- 9012676000, 9319520799, 9319582467	
	TERMINAL BLOCKS	6	PME-01	M/s PHOENIX MECANO LTD.,	388 BHARE, TALUKA MULSHI, POST GHOTAWADE, PIRANGOOT, INDUSTRIAL AREA, PUNE-412115	TEL - +912066745000 Awasthi(09971119006) Tel: ++91 20 6674 5103, Mobile: +91 90499 95985, Fax: ++91 20 6674 5126 contact person : Vishwa bandhu E-mail:d.gupta@pmipl-online.com ;admin@pmipl-online.com	
	TERMINAL BLOCKS	7	E1050	ESSEN DEINKI	FLAT NO. 502, SKYLINE HOUSE 85, NEHRU PLACE NEW DELHI	011-26217060	
ES63	TIMERS - PNEUMATIC	1	B04	BCH	20/4, MATHURA ROAD, FARIDABAD, HARYANA-121006	0129-4293000	
	TIMERS - PNEUMATIC	2	G01	ALSTOM LTD	A-7, SEC-65, NOIDA	0120-479 0000	
	TIMERS - PNEUMATIC	3	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	TIMERS - PNEUMATIC	4	E1144	TELEMECHANIQUE/ SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	TAKEN OVER BY SCHNEIDER
	TIMERS - PNEUMATIC	5	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	TIMERS - PNEUMATIC	6	E01	ELECTRONIC AUTOMATION PVT. LTD.	20, KHB INDUSTRIAL AREA YELAHANKA BANGLORE-560064	080 -28567561 / 080 -28567562 / 080 -42802345	
ES64	TIMERS - ELECTRONIC	1	E1050	ESSEN DEINKI	FLAT NO. 502, SKYLINE HOUSE 85, NEHRU PLACE NEW DELHI	011-26217060	
ES65	TRANSDUCERS	1	E1021	AUTOMATIC ELECTRIC LTD.	ADDRESS : 96 AB LONAVLA INDUSTRIAL ESTATE NANGARGAON, LONAVLA-410401	Phone : +91 2114323665 Fax : +91 2114273482	
	TRANSDUCERS	2	E1202	SOUTHERN TRANSDUCERS	INTERTECH B-83, FLATTED FACTORY COMPLEX, NEAR MODI MILLS, OKHLA, NEW DELHI-110020	Mr. Gurmohit Singh 011-41020365 / 9891402128	
	WINDING TEMP INDICATOR	1	E1101	PERFECT CONTROLS	OFFICE ADDRESS: 7, NORTH ROAD,WEST C.I.T. NAGAR,CHENNAI - 600035, INDIA.	Phone: (91-44) 24341043, 24330387, 42867651;Fax: (91-44) 24345075	

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS
ES66	WINDING TEMP INDICATOR	2	E1105	PRECIMEASURE	M/S. PRECIMEASURE CONTROLS PVT. LTD. 168/C, INDUSTRIAL SUBURB, PEENYA 3RD PHASE, BANGALORE - 560058. KARNATAKA, INDIA	Phone EPABX: +91-80-42602702. Fax: +91-80-41552205 E-mail: info@precimeasure.com	
ES72	ENERGY METER (ANALO	1	B07	BHEL (EDN)	MYSORE ROAD,BANGALORE-560026	080-26998500	
	ENERGY METER (ANALO	2	E1129	SIMCO ENGG. LTD	NO. 126, K ROAD, TIRUCHIRAPPALLI - 620001, TAMIL NADU	Mr. Madaswamy Muthu +(91)-(431)-4046223 +(91)-(431)-4046210 +(91)-9786600915	
	ENERGY METER (ANALO	3	R01	RISHABH INST.PVT LTD	RISHABH INSTRUMENTS PVT. LTD. F-31, MIDC, SATPUR NASHIK - 422007 MAHARASHTRA INDIA	marketing@rishabh.co.in 91-253 2202202/203 Fax: 91 253 2351064	
	ENERGY METER (ANALO	4	E1009	AUTOMATIC ELECTRIC LTD.	96 AB LONAVLA INDUSTRIAL ESTATE NANGARGAON, LONAVLA-410401	Phone : +91 2114323665 Fax : +91 2114273482	
	ENERGY METER (ANALO	5	CON1	CONZERVE SYSTEMS PVT. LTD.(SCHNEIDER)	87, 1ST FLOOR INDUSTRIAL DEVELOPMENT COLONY (IDC) MEHRAULI ROAD, UGURGAON 122001 HARYANA, INDIA.	4268899, 9910695701	
ES73	ENERGY METER (DIGITAL)	1	CON1	CONZERVE SYSTEMS PVT. LTD.(SCHNEIDER)	87, 1ST FLOOR INDUSTRIAL DEVELOPMENT COLONY (IDC) MEHRAULI ROAD, UGURGAON 122001 HARYANA, INDIA.	4268899, 9910695701	
	ENERGY METER (DIGITAL)	2	NK09	M/s Newtek Electricals	M-90, M.I.D.C, Waluj, Aurangabad 431136, Maharashtra, India	Tel/Fax: +91 240 2551555 E-mail: mkt.north@newtekelectricals.com, sales@newtekelectricals.com Mr Sanjeev Aggarwal (9958897890)	
ES74	AMMETER	1	E1009	AUTOMATIC ELECTRIC LTD.	96 AB LONAVLA INDUSTRIAL ESTATE NANGARGAON, LONAVLA-410401	Phone : +91 2114323665 Fax : +91 2114273482	
	AMMETER	2	R01	RISHABH INST.PVT LTD	RISHABH INSTRUMENTS PVT. LTD. F-31, MIDC, SATPUR NASHIK - 422007 MAHARASHTRA INDIA	marketing@rishabh.co.in 91-253 2202202/203 Fax: 91 253 2351064	
	AMMETER	3	NK09	M/s Newtek Electricals	M-90, M.I.D.C, Waluj, Aurangabad 431136, Maharashtra, India	Tel/Fax: +91 240 2551555 E-mail: mkt.north@newtekelectricals.com, sales@newtekelectricals.com Mr Sanjeev Aggarwal (9958897890)	
ES75	VOLTMETER	1	E1009	AUTOMATIC ELECTRIC LTD.	96 AB LONAVLA INDUSTRIAL ESTATE NANGARGAON, LONAVLA-410401	Phone : +91 2114323665 Fax : +91 2114273482	
		2	R01	RISHABH INST.PVT LTD	RISHABH INSTRUMENTS PVT. LTD. F-31, MIDC, SATPUR NASHIK - 422007 MAHARASHTRA INDIA	marketing@rishabh.co.in 91-253 2202202/203 Fax: 91 253 2351064	
	VOLTMETER	3	NK09	M/s Newtek Electricals	M-90, M.I.D.C, Waluj, Aurangabad 431136, Maharashtra, India	Tel/Fax: +91 240 2551555 E-mail: mkt.north@newtekelectricals.com, sales@newtekelectricals.com Mr Sanjeev Aggarwal (9958897890)	
ES76	MPCB	1	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	MPCB	2	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59	
	MPCB	3	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com	
	MPCB	4	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447	
	MPCB	5	S03	SCHNEIDER ELECTRIC INDIA PVT. LTD.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-122002	0124-3940400	
	MPCB	6	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011-3088 7520-29	
	MULTIFUNCTION METER	1	CON1	CONZERVE SYSTEMS PVT. LTD./ SCHNEIDER ELECTRIC INDIA PVT.	87, 1ST FLOOR INDUSTRIAL DEVELOPMENT COLONY (IDC) MEHRAULI ROAD, GURGAON 122001 HARYANA, INDIA.	4268899, 9910695701	TAKEN OVER BY SCHNEIDER

1553236/2023/PS-PEM-EL

ITEM CODE	ITEM/SERVICE DESCRIPTION	SL NO.	VENDOR CODE	VENDOR NAME	ADDRESS	PHONE	REMARKS	
ES78	MULTIFUNCTION METER	2	NK09	M/s Newtek Electricals	M-90, M.I.D.C, Waluj, Aurangabad 431136, Maharashtra, India	Tel/Fax: +91 240 2551555 E-mail: mkt.north@newtekelectricals.com, sales@newtekelectricals.com Mr Sanjeev Aggarwal (9958897890)		
ES79	RCCB	1	C01	C&S ELECTRIC LTD.	222, OKHLA IND. ESTATE, PH-III, NEW DELHI-110020	011-3088 7520-29		
	RCCB	2	S03	SCHNEIDER ELECTRIC INDIA PVT.	9TH FLOOR, BLDG. NO. 10, TOWER-C, DLF CYBER CITY, PH-II, GURGAON-	0124-3940400		
	RCCB	3	S01	SIEMENS	RC-IN I S NR DEL AREA, JIL BUILDING, TOWER-B, PLOT NO. 78, SECTOR 18, GURGAON-122015, INDIA	0124-2842000, 9873424331 amit.bhadauria@siemens.com		
	RCCB	4	A35	GE-POWER	KAMAK TOWER, 3RD FLOOR, PLOT NO. 12-A, TVK INDUSTRIAL ESTATE, EKKADUTHANGAL, GUINDY, CHENNAI-600032	044-49681447		
	RCCB	5	L01	L&T	32, SHIVAJI MARG, P.O. BOX- 6223, NEW DELHI-110015	011-41419554/59		
	RCCB	6	C02	CROMPTON GREAVES	RAIL TRANSPORTATION SYSTEMS,VANDANA BUILDING, 11, TOLSTOY MARG, TOLSTOY MARG, NEW DELHI, DL 110001	011 3041 6300		
ES80	PVC WIRES	BIS APPROVED MAKE						
ES86	PHOTOELECTRIC SWITCH	REPUTED MAKE						

1553236/2023/PS-PEM-EL

**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 1 OF 22

SECTION – II**STANDARD TECHNICAL REQUIREMENTS**



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 2 OF 22

1.0 INTENT OF SPECIFICATION

- 1.1 The requirements given in specification shall be fully complied with.
- 1.2 The “design” shall broadly cover the selection of components, materials, sizes etc. for the equipment of supply in vendor’s scope. Complete responsibility of establishing the correctness of equipment design rests with the vendor.
- 1.3 It is not the intent to specify herein all the details of design and manufacture. However, the equipment shall conform in all respects to high standards of design, engineering and workmanship, and shall be capable of performing required function in a manner acceptable to Purchaser, who will interpret the meaning of drawings and specifications and shall be entitled to reject any work or material, which in his judgement is not in full accordance herewith.
- 1.4 Make of all equipment and components shall be to the approval of Purchaser.

2.0 CODES & STANDARDS

- 2.1 The material shall comply with all currently applicable safety codes and statutory regulations of India as well as of the locality where the material is to be installed.
- 2.2 The material, construction, manufacture, inspection and testing shall conform to the latest revisions of standards as specified in Data Sheet A.
- 2.3 In case of conflict between the applicable reference standard and this specification, stringent requirement shall govern.

3.0 DESIGN REQUIREMENTS

3.1 LIGHTING DISTRIBUTION BOARD (LDB) / WELDING DISTRIBUTION BOARD (WDB)

3.1.1 General Requirements of LDBs/ WDBs

- a) LDB/WDB shall be totally enclosed, modular in construction, indoor type and suitable for electrical system data as specified in Data Sheet-A. The LDB/ WDB shall be free standing type suitable for installation on cable trenches / floor.
- b) LDB/ WDB shall consist of dust and vermin proof cubicles without the use of louvers (except the transformer compartment, where applicable).
- c) Good quality synthetic rubber / neoprene gaskets shall be put around the door, cover edges and cut-out edges for push button, lamps etc. for protection against dust. The door when closed, shall compress the gasket uniformly.
- d) Cut-out edges for instruments, relays etc. shall have sufficient overlap surface to minimize the dust entry. The arrangement for the front mounting of switch



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 3 OF 22

handles shall render the LDB/ WDB reasonably dust free such that the normal operations are not affected.

- e) The LDB/ WDB shall be designed to prevent contact with live parts both within the modules and in the cable alley.
- f) The bidder shall be responsible to check and coordinate the MCB characteristic with back up fuses etc. provided.
- g) All equipment shall be constructed of non-hygroscopic and non-inflammable materials.
- h) All components mounted in the LDB/ WDB shall be accessible and shall not impede access to wiring or terminals. All faults except busbar fault which may occur within any individual unit shall be confined within that unit only and shall not cause shutdown of any section of the board other than the affected unit itself. Maintenance and inspection shall be possible in any individual unit without affecting other units.
- i) Incoming unit shall comprise of either switch-fuse/ composite switch-fuse unit or MCCB as per Data Sheet A. Outgoing units shall be either switch-fuse/ composite switch-fuse unit or MCCB as per data Sheet A.
- j) Interlock between compartment door and modules shall be provided such that the door cannot be opened without switching off the power supply to the module.
- k) Defeat interlock shall be provided for the units comprising of switch or moulded case circuit breaker as a means of isolation device, such that it is possible to open the door with device ON. It shall not be possible to close the door till the interlock has been reinstated.
- l) Each LDB/ WDB shall be fitted with base frame made of angle or channel.
- m) All fixing nuts and bolts together with grounding bolts shall be provided.
- n) Lifting lugs shall be provided for each shipping section of LDB/ WDB. Removal of such lugs or hooks shall leave no opening in the LDB/ WDB.

3.1.2 LDB/ WDB with transformers (Additional Features)

- a) The LDB/ WDB shall be arranged in two adjacent but separate compartments, one compartment for the lighting transformer and the other for the incoming & outgoing feeders etc.
- b) The transformer shall be mounted on the base channel and it shall be possible to easily remove the transformer from the cubicle after opening the door. Necessary portable ramp made of mild steel shall be supplied along with each LDB/ WDB.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 4 OF 22

- c) Independent gasket hinged door with operating handle shall be provided for access to transformer & its taps. Operating handle shall have built-in key locking arrangement.
- d) Suitable ventilation arrangement for the transformer compartment to dissipate the heat of the transformer shall be provided. The arrangement shall be in the form of louvers and the same shall be provided with galvanised wire mesh with dust catchers on the inside.
- e) Connections between transformer secondary terminals and the busbars shall be made by using PVC insulated flexible copper cables or busbars.
- f) Warning plate shall be provided on transformer enclosure. The inscription of warning plate shall be as given below:
 - DO NOT OPEN DOORS WHEN ENERGISED
 - KEEP TAPS AT SAME POSITION FOR ALL PHASES
- g) Transformer enclosure shall be provided with a danger plate.

3.1.3 Lighting Transformer/ Welding Transformer

- a) Transformer, where specified, shall form an integral part of LDB/ WDB.
- b) Lighting transformer shall be dry type, natural air cooled and suitable for mounting inside the lighting distribution board. Transformer particulars shall be as specified in Data Sheet A.
- c) Rating of transformer shall be as per BOQ.
- d) Winding shall be of copper material and maximum winding temperature at full load and under site conditions shall not exceed 120 °C.
- e) Transformer shall be suitable for cable connections on the primary side and flexible cable or busbar connection on the secondary side.
- f) The secondary neutral of the transformer shall be brought out for getting a grounded 4 wire supply system.
- g) The transformer neutral shall be brought outside the LDB/ WDB for earthing. The neutral bus bar shall be insulated from the LDB/ WDB enclosure.
- h) Transformers shall be provided with the rollers, pulling holes, lifting lugs, jacking positions etc.

3.1.4 Busbars, Connections and Joints

- a) Busbars shall be supported on non-hygroscopic and non-inflammable insulators of material such as glass reinforced moulded plastic material, epoxy cast resin



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 5 OF 22

etc. Separate supports shall be provided for each phase of the busbars. Insulation level of neutral busbar shall be same as that of phase busbars.

- b) Busbars shall be contained in a separate vermin-proof compartment within the LDB/ WDB and shall have bolted sheet steel covers for providing suitable access.
- c) Busbar clearances in the air shall be as per applicable standard for 415V, 3 phase system.
- d) Temperature for busbars, droppers and connections shall not exceed 90 deg.C for an ambient of 50 deg.C while carrying maximum continuous current.
- e) The busbar, busbar connections and supports shall have sufficient strength to withstand thermal and electromechanical stresses produced by the specified short circuit level of the system.
- f) Busbars (including neutral busbar) shall be capable of carrying the short-time current specified in Data Sheet A. The duration of short-time current shall be 1 sec unless mentioned otherwise in Data Sheet A. For the specified current and duration, there shall be no damage to the equipment.
- g) The neutral bus shall be rated same as phase bus.
- h) Main busbars and connections shall be prominently marked and displaced for standard sequence counting from rear to front, top to bottom, or left to right as viewed from the switching device operating mechanism side.
- i) Busbars and connections shall be provided with colour coded PVC sleeves. All live parts shall be properly shrouded with insulating material.
- j) Earth busbar shall be provided separately.
- k) Busbar Joints
 - Busbar and tap off joints shall be bolted type.
 - Busbars shall be thoroughly cleaned before jointing. Suitable contact grease shall be applied to remove oxide film just before jointing.
 - For copper busbars, the connecting portion shall be tinned or silver plated.

3.1.5 Wiring and Terminals

- a) All internal wiring for connections to remote equipment shall be brought to terminal boards. Spare contacts of devices shall also be wired upto terminal board as per schemes. Wires shall not be jointed or teed-off except at terminal points.
- b) Wiring shall be made by 1100 volt grade three / seven strand PVC insulated copper wire having a cross-sectional area of not less than 1.5 sq.mm. All



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 6 OF 22

connections from CT leads upto instruments, terminals shall be made by copper wires of minimum 2.5 sq.mm size.

- c) All wiring shall be made with the Colour Codes specified below :
- i) 3 phase AC Connections

Phase 1 (R)	Red
Phase 2 (Y)	Yellow
Phase 3 (B)	Blue
Neutral	Black
 - ii) 1 phase AC Connections

Phase	Red / Yellow / Blue (as per associated circuit)
Neutral	Black
 - iii) DC Connections

Positive	White
Negative	Grey
 - iv) Earth Connection Green
- d) Where wiring passes from one compartment to another, the aperture shall be 'Bushed' to prevent damage to wires against sheet metal edges. Bushes may comprise of good quality rubber / PVC grommets.
- e) Every wire end shall be fitted with numbered ferrules of white or yellow colour having glossy finish with identification number engraved in black. Ferrules shall be made of moisture and oil resisting insulating material. Ferrules shall be of interlocked type or tight fitting type. Ferrules shall be so fitted that they will not get detached, when the wire is removed from the terminal.
- f) System of marking of wiring shall be as per applicable standard.
- g) All wires used internally shall have crimped on tinned copper lugs for terminations.
- h) Terminal boards shall be stud type with insulating barriers of adequate height.
- i) Terminal boards shall have separate terminals for incoming and outgoing wires with not more than two wires connected to any one terminal.
- j) Terminal boards shall be mounted vertically or in the horizontal rows and properly spaced to have clean wiring arrangement, adequate access for putting ferrules, making terminations etc. It shall be possible to read the ferrule numbers when the wiring is complete. Where terminals may be live when the equipment is isolated from the main supply, these shall be clearly marked near the terminal boards.

3.1.6 Cable Terminations



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 7 OF 22

- a) All cables, either incoming or outgoing to the LDB/ WDB, shall be terminated in a cable chamber. For each panel, there shall be a cable chamber on the side. The door of cable chamber should open or be locked with the help of a tool. Unless stated otherwise in Data Sheet A, all cables shall enter from the bottom.
- b) Removable undrilled gland plates of sheet steel shall be provided in the cable chamber for entry of cables. Minimum thickness of gland plate shall be as per Data Sheet-A. The gland plate shall be of adequate size for connecting requisite number of cable glands for power and control cables.
- c) Heavy duty bolt-on termination tinned copper lugs of compression type shall be used for power cable termination. The tinned copper cable lugs for all incoming and outgoing power cables shall be supplied by the vendor.
- d) For supporting and clamping of cable cores at regular interval in cable alleys, suitable slotted angle upto the respective terminal blocks shall be provided.

3.1.7 Earthing

- a) An earth busbar of adequate size of shall be provided at the bottom for the entire length of the LDB/ WDB. Material of earth busbar shall be GI unless mentioned otherwise in Data Sheet A.
- b) Every metal part other than those forming parts of an electrical circuit shall be connected to the earth bus by means of high conductivity copper wire of size not less than 2.5 sq. mm. cross-sectional area.
- c) Doors shall have a flexible copper wire for earth connection to fixed unit.
- d) Each LDB/ WDB shall be fitted with two earthing studs located in accessible position on sides for connection of internal earth busbar to the external earthing connection.
- e) Earth busbar shall be brought outside LDB/ WDB for making external connections.

3.1.8 Types of LDB/ WDB

- a) The LDB/ WDB shall be of following type:
 - LDB/ WDB-H (n) - AC LDB/ WDB with 100 kVA transformer
 - LDB/ WDB-F (n) - AC LDB/ WDB with 50 kVA transformer
 - LDB/ WDB-N (n) - AC LDB/ WDB with no transformer
 - LDB-D (n) - DC LDB

NOTE: (n) indicates number of outgoing feeders.

- b) AC LDB/ WDB (LDB/ WDB-H, LDB/ WDB-F, LDB/ WDB-N)



**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS**

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 8 OF 22

Each LDB/ WDB shall comprise of the following and comply with Data Sheet A:

- i. One lighting/welding transformer (LDB/WDB-H & LDB/WDB-F).
- ii. Incomer(s) of TP / TPN switch-fuse unit or MCCB / MCCB with neutral link as per Data Sheet A. It shall be provided on the primary side of transformer for LDB/WDB type LDB/WDB-H & LDB/WDB-F.
- iii. Set of busbars with 3 phase and neutral.
- iv. TPN switchfuse units or MCBs for each outgoing circuit.
- v. Three indicating lamps with fuses for indicating bus supply ON.
- vi. CT operated ammeter with selector switch.
- vii. VT operated voltmeter with selector switch.
- viii. Power & control terminals, earth-stud, earth busbar, designation labels, internal wiring, power cable lugs, glands etc. shall be provided to complete the LDB/ WDB in all respects.

c) DC LDB (LDB-D)

Each LDB shall comprise of following and comply with enclosed Data Sheet A:

- i. Incomer & Outgoing feeders shall be as per Datasheet-A.
- ii. Two pole DC contactor on the incoming circuit for changeover to DC in case of AC normal supply failure.
- iii. One under voltage relay of suitable range, if required.
- iv. One ON delay timer.
- v. One test push button.
- vi. Set of bus bars for positive and negative.
- vii. Two indicating lamps with fuses for indicating bus supply ON.
- viii. Power & control terminals, earth-stud, earth busbar, designation labels, internal wiring, power cable lugs, glands etc. shall be provided to complete the LDB in all respects.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 9 OF 22

3.2 LIGHTING PANELS (LPs)

3.2.1 General Requirements of Lighting Panels

- a) LPs shall be totally enclosed, suitable for electrical system data as specified in Data Sheet A. The LP shall be suitable for mounting on wall / column / structure.
- b) Panels shall be suitable for indoor / outdoor application as per Data Sheet A.
- c) All components of the LP shall be fully mounted inside the panel. LPs shall have only one operational front. Door shall be provided to give full access to all the components. Door shall have padlocking arrangement.
- d) LPs shall consist of dust and vermin proof cubicles without the use of louvers.
- e) Good quality synthetic rubber / neoprene gaskets shall be put around the door. The door when closed, shall compress the gasket uniformly.
- f) The LPs shall be designed to prevent contact with live parts when the front door is open.
- g) All busbars (phase, neutral, positive, negative as applicable) within a panel shall be of the same size.
- h) All control wiring inside the panels shall be carried out with 1100 V grade, PVC insulated flexible copper wire of 2.5 sq. mm size.
- i) The rated continuous current of the equipment and components shall be as given in Datasheet-A. These ratings shall be obtained with the components mounted in their housing as in service without exceeding the permissible temperature rise.
- j) Each LP shall be fitted with M.S. mounting brackets.
- k) Panel shall be suitable for top / bottom cable / conduit entries. However, outdoor LPs shall have bottom cable / conduit entry. Removable undrilled gland plate of sheet steel shall be provided for entry of cables. Minimum thickness of gland plate shall be as per Data Sheet-A. The gland plate shall be of adequate size having knock-outs for requisite number cable connections. Gland plate shall be provided with gasket.
- l) The lighting panel shall be complete with copper busbars, and shall incorporate incomer and outgoing circuits as per Data Sheet-A. Number of outgoing circuits shall be as per BOQ.
- m) Each lighting panel shall be fitted with two GI earth studs located in accessible position on the outside of the panel on opposite sides.
- n) All metal parts of the panel except current carrying parts shall be bonded together electrically to the earthing stud.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 10 OF 22

- o) Each panel shall be fitted with phase barriers of fireproof insulating material in such a manner that it is not readily possible for personnel to touch the phase busbars. Insulating sheet shall be fitted around the MCBs such that only the surface and toggle of the MCBs are available on the front.
- p) The supply of cable lugs for power and control cable connections forms part of the supply of equipment.
- q) Each panel shall be provided with a circuit directory plate with inscriptions neatly typed and laminated, fitted on the inside of door.

3.2.2 Type of Lighting Panels

- a) LP-A (n) - AC Lighting Panel
- b) LP-D (n) - DC Lighting Panel
- c) LP-F (n) - Fancy Lighting Panel (Decorative)
- d) LP-S (n) - Street Lighting Panel

NOTE: (n) indicates number of outgoing circuits.

3.2.3 AC Lighting Panel (LP-A)

- a) LPs shall be provided with incomer and requisite number of outgoing circuits as per Data Sheet-A. Number of outgoing circuits shall be as per BOQ.
- b) Separate neutral shall be available at terminal block for each outgoing circuit.
- c) Construction of AC Normal and AC Emergency panels shall be same.

3.2.4 DC Lighting Panels (LP-D)

- a) LPs shall be provided with incomer and requisite number of outgoing circuits as per Data Sheet-A. Number of outgoing circuits shall be as per BOQ.

3.2.5 Decorative Type Lighting Panels (LP-A)

- a) Decorative lighting panels shall be designed for use in areas like administrative building, service building, canteen, residential premises etc.
- b) Thickness of sheet steel shall be as per manufacturer's practice.
- c) LPs shall be of tone colour with elegant finish.
- d) LPs shall be provided with incomer and requisite number of outgoing circuits as per Data Sheet-A. Number of outgoing circuits shall be as per BOQ.
- e) LPs shall be suitable for either surface or flush mounting. Flush mounted panels shall have the collared door suitable for matching with the wall.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 11 OF 22

- f) Lighting Panels may be provided with transparent acrylic cover for operation of MCBs.
- g) LPs shall be provided with knockouts on the top, bottom and sides.

3.2.6 Street Lighting Panel (LP-S)

- a) Street Lighting Panels shall be provided for feeding power supply to luminaires of street light poles, flood lighting poles, lighting masts, watch towers etc.
- b) Each Street Lighting Panel shall comprise of the following :
 - i. One TPN door interlocked switch-fuse unit incomer. Interlock defeat feature shall also be provided.
 - ii. Three pole AC Contactor
 - iii. 0 - 24 hrs timer and/or photo-electric switch for automatic switching of contactor
 - iv. Three phase & neutral busbars
 - v. Single pole or three pole MCBs for each outgoing circuit as per Data Sheet A
 - vi. Two lamps for bus supply ON & OFF indications
 - vii. Complete wiring arrangement as per control scheme.
 - viii. Auto-Manual selector switch
 - ix. ON push button
 - x. OFF push button
- c) Switching ON and switching OFF shall be through both 0 - 24 hrs timer and light sensor in automatic mode.
- d) One number light sensor in weather proof enclosure having IP:55 degree of protection shall be supplied loose along with each SLP.
- e) Internal power wiring shall be done with PVC insulated Cu wire of suitable size. All control wiring inside the panel shall be carried out with 1100 V grade, PVC insulated flexible copper wires.
- f) Two nos. outgoing circuit in each panel shall be tapped before contactor for watch tower supply.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 12 OF 22

4.0 COMPONENTS OF LDB/WDB AND LIGHTING PANEL

4.1 MOULDED CASE CIRCUIT BREAKERS

- a) Moulded case circuit breakers (MCCBs) shall be provided when called for in Data Sheet A for use in lieu of switch fuse. MCCB shall meet the requirements stipulated in Data Sheet A.
- b) MCCBs in AC circuits shall be of single throw, air break, heavy duty type triple pole construction arranged for simultaneous three pole manual closing and opening and for automatic tripping at short circuit and overload. Neutral link shall be provided for LDB/ WDB without transformers.
- c) Operating mechanism shall be quick make, quick break and trip free type.
- d) The ON, OFF & TRIP positions of the MCCB shall be clearly indicated so as to be visible to the operator when mounted as in service. Operating handle shall be provided on front of the LDB/ WDB.
- e) MCCBs shall be capable of withstanding the thermal stresses caused by overloads and short circuits. The maximum tripping time under short circuit shall not exceed 20 milli-seconds.
- f) MCCB terminals shall be shrouded and designed to receive cable lugs for cable sizes relevant to circuit ratings.
- g) Under voltage releases and other releases shall be provided as specified in data Sheet-A.

4.2 SWITCH-FUSE UNITS

- a) These units shall preferably comprise of switches having integral fuses, called composite units. Alternatively, combination units of separate switch and fuse may also be acceptable.
- b) These units shall be provided for general purpose i.e. incoming or outgoing units.
- c) The units shall be of the air break air insulated type and designed to ensure safety to operating personnel.
- d) Composite units shall have integral fuses i.e. fuse carrier with fuse link (fuse link forming the moving contact). The design shall ensure that the moving contact is not live when switch is open i.e. in OFF position, so as to facilitate removal of fuse.
- e) The switch shall be capable making and carrying the system prospective fault current, but limited in magnitude and duration by the cut off characteristics of the largest HRC fuse link that may be fitted to that unit.
- f) The fixed contact shall be so shrouded that maintenance of the unit can be carried out in safety with the busbars live.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 13 OF 22

- g) Where one isolating switch is used as the incoming device, the incoming side fixed contacts shall be shrouded to ensure that maintenance can be carried out with the remote fuse and switch closed.
- h) Composite switch-fuse or the combination of switch and fuse shall meet the requirements of its components as follows:

Isolating Switch

- i. Switches shall be air-break, quick make, and quick break heavy duty type conforming to applicable standard.
- ii. All switches shall have visible ON / OFF position indication and shall be padlockable in any (ON / OFF) position.
- iii. Switches shall be door interlocked such that it shall not be possible to gain access to inside the unit unless the isolating switch is in OFF position.
- iv. The switches shall be suitable for independent manual operation.
- v. The switch contacts shall be of silver alloy or silver plated copper and springs of non-corrosive material.
- vi. Inter-phase barriers shall be provided to prevent possibilities of phase to phase fault in the switch. The switch shall also be shrouded from all sides to prevent access to live parts on the switch after opening the unit door. The barriers and shrouding shall extend upto the height of switch to fully enclose both side terminals of the device. The arrangement shall permit easy maintenance.

High Rupturing Capacity (HRC) Fuses

- i. The fuse serving as the short-circuit protective device in isolating fuse-switch units shall be of HRC cartridge, current limiting and plug-in non-deteriorating type.
- ii. The fuse carriers shall be easily withdrawable for replacement of fuse. Insulated fuse pullers shall be provided where fuses are not mounted in insulating carriers to remove and replace fuses in live conditions.
- iii. Fuses shall preferably be fitted with a device to indicate operation (i.e. when the fuse has blown).
- iv. Live terminals of fuse bases shall be shrouded to prevent contact with personnel where fuse links are not mounted in carriers and are directly plugged into the fuse base. Inter-phase barriers extending throughout the length of the fuse base shall be provided to prevent inter-phase short circuit. They shall be shrouded from all sides to prevent accidental contact.
- v. Fuse carriers and bases shall be of good quality moulded insulating material. Porcelain fuse bases and carriers will not be accepted.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 14 OF 22

vi. The rating and characteristics of fuse links shall be chosen appropriately for short circuit protection of circuits downstream.

4.3 MINIATURE CIRCUIT BREAKERS

- a) The use of miniature circuit breakers (MCBs) combining thermal overload and magnetic short circuit protection shall be application for the outgoing circuits of Lighting Panels.
- b) MCBs shall have suitable rating as specified in Data Sheet A.
- c) MCBs shall be suitable for housing in the lighting panel and for connection of copper link bus bar at the incoming and copper lugs at the outgoing ends.
- d) The terminals of MCB and ON/OFF positions shall be clearly and indelibly marked.

4.4 CURRENT TRANSFORMERS

- a) CTs shall be air insulated having insulation class E or better, cast resin type and shall be capable to withstand the thermal and mechanical stresses resulting from maximum short circuit.
- b) The short time current duration for CTs shall be one second.
- c) CT primary current shall not be less than the full load thermal rating of the associated circuit. CT secondary current shall be as specified in Data Sheet A. Polarity shall be marked in a suitable manner. The ratings shall be adequate to cater for the burden of connected instruments.
- d) CTs shall be of bar primary / wound primary / ring type capable of carrying the rated primary current.

4.5 VOLTAGE TRANSFORMER

- a) Voltage transformers (VT) shall be dry, cast resin type comprising of single phase or three phase units. They shall have their primary windings protected by current limiting fuses with interrupting capacity corresponding to that of the lighting board / panel.
- b) VT secondary windings shall be earthed in LDB/ WDB / LP through link, which can be removed for insulation testing.
- c) Three phase voltage transformers shall be as per Data Sheet A.

Single phase VTs shall have voltage rating of (Nominal System Voltage / $\sqrt{3}$) V / (110 / $\sqrt{3}$) V so that secondary voltage shall be 110 volts phase to phase when the secondary winding is star connected.

- d) VTs shall have an output rating adequate to cater to the burden connected to them.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 15 OF 22

4.6 INDICATING METERS

- a) Meters shall be panel mounted, flush type and suitable for rear terminal connection.
- b) Meters and instruments shall be enclosed in dust proof, moisture resistant black finished cases and shall be suitable for tropical use. Instruments shall be suitable for operation from the secondary windings of CTs and VTs.
- c) All instruments shall be calibrated to enable direct reading of primary quantities. Instruments shall be adjusted and calibrated at manufacturer's works and shall have means of calibration, checking and zero adjustment at site.
- d) All the divisions and the quantity to be measured shall be clearly marked. Instruments shall conform to applicable standard having black numerals and lettering on white anti-parallax dial with knife edge pointer. Indicating instruments shall be of moving iron type for AC and moving coil type for DC circuits.
- e) Instruments having metallic cases shall be fitted with earthing terminals.

4.7 CONTACTORS

- a) Contactors shall be of the air break type, electromagnetic type fitted with arc shields.
- b) The operating coil shall be suitable for satisfactory operation in the range of 85% - 110% of nominal voltage specified under the Data Sheet A. The coil shall be tropicalized having insulation not less than class 'E'.
- c) Electrically independent auxiliary contacts not less than 2NO + 2NC for interlocking and indication shall be fitted to individual power contactor.
- d) All springs shall be made out of a corrosion proof material.

4.8 RELAYS

- a) Relays shall be provided on the various circuits as per schemes. Relays shall be flush mounted on front of the board. Relay case shall be painted with dull black or egg shell black enamel and with back connected terminals. Metal cases and frames of relay shall be earthed.
- b) All relays shall be of withdrawable type with built-in testing facilities, with provision for inspection, maintenance and replacement. Where built-in test facility is not provided for a particular relay, separate suitable test block shall be provided on the board for this purpose.
- c) Relay performance shall not alter due to mechanical shock or vibration or external magnetic field which may be present at the place of mounting.
- d) Each relay shall not have less than two independent pairs of contacts.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 16 OF 22

4.9 TIMERS

4.9.1 Time Switch

- a) Time switch shall be suitable for automatic switching ON and OFF of street lighting / flood lighting circuits.
- b) Time switch have 00 - 24 hrs clock base.
- c) Time switch shall indicate actual time and shall permit accurate time setting.
- d) Time switch shall be rugged, independent of normal fluctuations of voltage / frequency and free from maintenance.
- e) Contact rating, clock accuracy, rated voltage rating and frequency rating of timer shall be suitable to its application.
- f) Time switch shall be provided with Ni-Cd battery.
- g) Time switch shall be suitable for mounting inside the panel.

4.9.2 On/Off Delay Timer

- a) On delay timer shall be required for continuation of DC supply for a limited duration when the AC Emergency supply has been restored and DG set is under stabilisation.
- b) Timer shall be fully static and suitable for operation on normal frequency and system voltage.
- c) Timer shall have high setting accuracy, high repeat accuracy, low reset time and low power consumption.
- d) Timer shall have the time setting range as mentioned in Data Sheet A.
- e) Timer shall be suitable for mounting inside the panel.

4.10 SELECTOR SWITCHES

- a) The rating and other features of the switches shall be suitable for the application. The number of positions and the number of contacts required for each switch shall be as indicated in the schemes
- b) Selector switches shall be stay put type, provided with properly designated escutcheon plates clearly marked to show operating position.
- c) Terminals carrying potential above 120 Volts shall be shrouded to prevent accidental contact with personnel.
- d) Ammeter selector switches shall have make before break contacts.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 17 OF 22

- e) The switches shall be suitable for semi-flush mounting with the front plate and operating handle projecting out. All connection to the switches shall be from the back.
- f) The arrangement for front mounting of these devices shall be such as to make them reasonably dust free so as not to interfere with normal operation.

4.11 PUSH BUTTONS

- a) Push button shall be heavy duty, flush mounted suitable for the application.
- b) Push button shall be provided with integral escutcheon plates marked with its function identified as per schemes.
- c) Colour shall be appropriate to the function.
- d) Minimum number of contacts shall be 2 NO + 2 NC or as per the requirements of control scheme.

4.12 INDICATION LAMPS

- a) Indication lamps shall be complete with lens covers and holders.
- b) Each lamp shall be fitted with a durable resistance integrally wired in series with the lamp. Alternatively, lamps with built in transformers are acceptable.
- c) The lamp cover (lens) shall be translucent of appropriate colour.
- d) Bulbs and covers shall be interchangeable, easily replaceable from the front without the need for any special means.
- e) Terminals having potential above 120V shall be shrouded to prevent contact with personnel.
- f) Terminals shall be suitable for ring type copper cable lugs of size depending upon the circuit rating.

4.13 CABLE GLANDS

- a) Whether specifically mentioned or not, cable glands of suitable sizes shall be supplied along with each equipment for power and control cables.
- b) Rubber components used in the gland shall be of neoprene.
- c) Name / trade name of manufacturer, type no. and applicable range of outer diameter of cable shall be engraved / indelibly printed on the cable gland.

4.14 CABLE LUGS

- a) All equipment shall be supplied with the power and control cable lugs of suitable size, whether specifically mentioned or not.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 18 OF 22

- b) Name / trade name and size of lug shall be engraved/ indelibly printed on each cable lug.

4.15 TERMINALS

- a) Terminals shall be stud type of copper material.
- b) Terminals shall be provided with transparent cover(s).
- c) Separate terminals shall be available for each termination of loop-in and loop-out power connections.

5.0 LABELING

- 5.1 Labels to identify all the Main assemblies, Sub-assemblies and components of the LDB/ WDB and LPs shall be provided.
- 5.2 Name and rating plate / marking shall be provided as required by relevant standard applicable to each component / assembly to be identified.
- 5.3 Labels shall be of two colour, three layer plastic material with matt or semi matt finish or of the anodised aluminium sheet.
- 5.4 All labels other than "Danger" or "Warning" labels shall have black lettering on a white background. Danger labels shall be as per applicable standard and shall not be affixed on to removable parts.
- 5.5 All labels shall be securely fixed on to the equipment by means of self tapping screws or other approved means.
- 5.6 Stick-on type labels of good quality and permanent mounting shall be acceptable for internally mounted components only.
- 5.7 A list of all such items to be labeled and text and type of labels to be provided is given below:

a) BOARD DESIGNATION (MAIN EQUIPMENT LABEL)

- i. **Inscription :**
Designation & LDB/ WDB number for LDB/ WDB.
Designation and LP number for LPs.
- ii. **Location :**
Top centre in the front of the LDB/ WDB.
Top centre in the front of the LP.
- iii. **Material :**
3 Layer plastic material, fixation by self tapping, non-rusting screws, black inscription on white back ground.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 19 OF 22

b) OUTGOING - FEEDER DESIGNATION

- i. **Inscription** : Module number, LP number / purpose.
- ii. **Material** :
Black engraving on white anodised aluminium plate of thickness 1.6 mm or more. Plate to be secured with screws.

c) COMPONENT DESIGNATION

- i. **Inscription** : Letter symbol / Legend as assigned in schemes.
- ii. **Location** : Near or on the component
- iii. **Material** : Stick-on type

5.8 CIRCUIT DIAGRAM / DIRECTORY PLATE

- a) A diagram is to be prepared for fixing to the inside cover of every lighting panel giving details of the points controlled by each circuit.
- b) The circuit list shall be typed or printed stating the location of the equipment served, rating of the protective unit and the circuit loadings.
- c) The list shall be mounted on the inside of the cover door and shall be protected by an acrylic sheet cover to be easily removable to permit circuit modifications.

6.0 SURFACE TREATMENT

- 6.1 All metal parts and the surfaces (exterior & interior) of equipment, unless stated otherwise in case of reflectors, shall be degreased by dipping in hot alkaline solution and rubbed with wire brush to remove oil & scale from them & then rinsed in water. Alternatively, they may be shot / sand blasted.
- 6.2 Parts shall be pickled by dipping in hydrochloric acid tank to remove the rust from the surfaces formed during storage of sheets & then rinsed to remove traces of the acid. The cleaning and pretreatment of all metal parts shall be as per applicable standard.
- 6.3 The surfaces to be painted shall then be prepared by phosphatizing to protect them from further rusting & to create a good bond with the paint. The pretreatment shall conform to the applicable standard.
- 6.4 All parts shall then be subjected to a coat of red oxide primer paint.
- 6.5 All inside and outside surfaces of panel shall be spray painted with synthetic enamel of the shade and minimum thickness as per Data Sheet A.
- 6.6 Electrostatic or powder painting shall be acceptable subject to purchaser's approval.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 20 OF 22

6.7 Wherever possible, finished parts shall be coated with peelable compound by spraying method to protect the finished product from scratches, grease, dirty and oily spots during handling and transportation.

7.0 PACKING

7.1 Packing procedure shall conform to the following :

- a) The equipment shall be properly packed before dispatch. The packing shall prevent damage to the contents while handling and lengthy period of outdoor storage.
- b) The equipment shall be wrapped in weather proof packing using polythene sheets/ air bubble sheets/ thermocol sheets and then secured in wooden packing cases. Wood for wooden packing cases/ crates shall be chemically treated to prevent deterioration due to fungi and attack by termites, borers, and any other kind of infection.
- c) The equipment shall be secured by fixing base plate/ frame with the help of bolt and nuts etc. to bottom frame of the wooden packing cases/ crates. Suitable cushioning material like rubberised coir (min. 50 mm thick & 100 mm wide) shall be provided on the bottom support. Gap between the panel and casing shall be filled with rubberised coir with distance between consecutive supports less than 500mm.

7.2 Specification for the sea worthy packing, if enclosed, for the export jobs shall form part of the specification.

8.0 INSPECTION & TESTING

8.1 Bidder shall confirm compliance with the BHEL Standard Quality Plan (PE-QP-999-558-E005) without any deviations. At contract stage, the successful bidder shall submit the same QP for BHEL/ ultimate customer's approval. In case bidder has reference QP agreed with ultimate customer, same can be submitted for specific project after award of contract for BHEL/ ultimate customer's approval. There shall be no commercial implication to BHEL on account of any changes in QP during contract stage.

8.2 All the components and completely assembled equipment shall be tested as per the latest edition of standards. Charges for these tests shall be deemed to be included in equipment price.

8.3 All the specified type and routine tests shall be carried out to verify the rating and performance of the equipment. Where valid type test certificates in evidence of equipment performance claimed are available & approved by purchaser, the requirements for conducting type tests may be waived. The general arrangement of object under test shall be to purchaser's approval.



TECHNICAL SPECIFICATION FOR DISTRIBUTION BOARDS

SPECIFICATION NO. PE-SS-999-558-E005

VOLUME II

SECTION II

REVISION: 0

DATE: 22.08.2016

SHEET 21 OF 22

- 8.4 Functional testing shall be carried out for Lighting/Welding Distribution Boards/ Lighting Panels.
- 8.5 All manufacturing processes viz. machining, sheet forming, electroplating, wire routing, cleating & crimping, assembly, surface preparation shall conform to good manufacturing practices.
- 8.6 Inspection for dimensional & visual checks especially of the following, with respect to contract drawings, documents & standards shall be conducted:
- General sturdiness & rigidity of equipment.
 - Surface finishing.
 - Gasketting.
 - Inter-changeability.
 - Constructional features viz. location, accessibility & marking of components, segregation, accessibility to live parts (shrouding) etc.
 - Completeness of scope.
- 8.7 Safety interlocking verification shall be done.
- 8.8 Each lighting transformer shall be routine tested and one transformer of each rating shall be type tested in accordance with relevant standard in case type test certificates of similar transformers are not available / not acceptable to the purchaser.
- 8.9 Equipment shall be liable for rejection if tolerances on the values of dimensions, power consumption, impedances, temperature rise etc. exceed the specified values by purchaser and / or standards.

9.0 TOOLS AND TACKLE

- 9.1 Tools & tackle which are essential to facilitate assembly, adjustments, erection, maintenance & dismantling of equipment shall be provided as part of equipment supplied.
- 9.2 The above tools shall be supplied along with the initial consignment of equipment so as to be available prior to erection but may not be used for erection purposes.
- 9.3 Vendor shall also submit a list of recommended tools and tackle. Acceptance of these tools and tackle shall not be a binding on the purchaser.
- 9.4 Schedule of tools & tackle shall be filled up by bidder.

10.0 SPARES

- 10.1 Mandatory spares (if applicable) are indicated in BOQ-cum-price schedule.

1553236/2023/PS-PEM-EL

**TECHNICAL SPECIFICATION FOR
DISTRIBUTION BOARDS****SPECIFICATION NO. PE-SS-999-558-E005****VOLUME II****SECTION II****REVISION: 0****DATE: 22.08.2016****SHEET 22 OF 22**

10.2 Erection & commissioning spares are included in the bidder's scope of supply. Bidder to furnish list of E&C spares in the relevant schedules of the Bid Form and Price Schedules.

1553236/2023/PS-DEM-EL



ITEM : (MATERIAL, CLASS, GRADE, RATING, SIZE ETC.):
LIGHTING PANEL & LIGHTING DISTRIBUTION BOARDS

STANDARD QUALITY PLAN

Q.P. No. : 0000-999-QOE-S-034
 REV. : 01 DTD: 15/03/04
 PAGE 1 OF 3
 VALID UPTO :14.03.07

REVIEWED BY: S.D. SINGH
 O.P. NIRANJAN
 I. J. SINGH
 APPROVED BY: ANIL GUPTA

SL. NO.	COMPONENT & OPERATIONS	CHARACTERISTICS	CLASS	TYPE OF CHECK	QUANTUM OF CHECK		REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS	
					M	C/N				M	C	N		
1	2	3	4	5	6		7	8	9	D*	**	10	11	
1	Lighting Panels & Lighting Distribution Boards Final Inspection and Testing	a) Overall Dimensions	MA	Meas.	100%	One Panel/ Type/lot	NTPC/Main supplier Appd. Drg / data sheet	NTPC/Main supplier Appd. Drg / data sheet	Inspt. Report		P	W	W	
		b) Thickness of sheet	MA	Meas.	100%	--DO--	--DO--	--DO--	--DO--		P	W	W	
		c) Paint shade	MA	Visual	100%	--DO--	--DO--	--DO--	--DO--		P	W	W	
		d) Thickness of paint	MA	Meas	100% of items	Min. 5 points/ Panel	--DO--	--DO--	--DO--		P	W	W	
		e) Surface finish	MA	Visual	100%	--DO--	Smooth, without lump	Smooth, without lump	--DO--		P	W	W	
		f) Adhesion Test	MA	Mech.	One sample/ lot/size	One sample lot	Should not peel off	Should not peel off	--DO--		P	W	W	
		g) Name Plate	MA	Visual	100%	10% of each type	NTPC/Main supplier Appd drg/ data sheet	NTPC/Main supplier Appd drg/ data sheet	--DO--		P	W	W	
		h) Tightness of bus bar bolts	MA	Mech	100%	One Panel/ Type/lot	Manufacturer Std.	Manufacturer Std.	--DO-		P	W	W	
		i) Bus Bar Clearance	MA	Meas.	100%	--DO--	NTPC/Main supplier Appd drg /data sheet	NTPC/Main supplier Appd drg /data sheet	--DO--		P	W	W	

LEGEND: RECORDS IDENTIFIED WITH "TICK" SHALL BE ESSENTIALLY INCLUDED BY THE CONTRACTOR IN QA DOCUMENTATION

** M: MANUFACTURER/SUB-SUPPLIER, C:CONTRACTOR/NOMINATED INSPECTION AGENCY(SUBJECT TO PRIOR APPROVAL OF NTPC). N: NTPC. INDICATE "P" PERFORM "W" WITNESS AND "V" VERIFICATION AS APPROPRIATE

"CHP" BY NTPC SHALL BE IDENTIFIED IN COLUMN "N" AS "W".

SL. NO.		COMPONENT & OPERATIONS	CHARACTERISTICS	CLASS	TYPE OF CHECK	QUANTUM OF CHECK		REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS
						M	C/N				M	C	N	
1	2	3	4	5	6		7	8	9	D*	**	10		11
		j) GA& Bill of material	CR	Phy.	100%		10% of each type	--DO--	--DO--	--DO--		P	W	W
		k) Identification of Component lay out	MA	Visual	100%		One Panel/ type/lot	--DO--	--DO--	--DO--		P	W	W
		l) Completeness of												
		i) Wiring	MA	Elect.	100%		--DO--	--DO--	--DO--	--DO--		P	W	W
		ii) Ferruling	MA	Visual	100%		--DO--	--DO--	--DO--	--DO--		P	W	W
		m) Size of wires	MA	Meas.	100%		--DO--	--DO--	--DO--	--DO--		P	W	W
		n) Colour coding of bus bar	MA	Visual	100%		--DO--	--DO--	--DO--	--DO--		P	W	W
		o) Spare terminals	MA	Meas.	100%		--DO--	--DO--	--DO--	--DO--		P	W	W
		p) Shrouding of live parts	MA	Visual	100%		--DO--	--DO--	--DO--	--DO--		P	W	W
		q) Door earthing	MA	Megger	100%		--DO--	--DO--	--DO--	--DO--		P	W	W
		r) Functional Tests including HV, IR & continuity	CR	Elec.	100%		10%	--DO--	--DO--	--DO--		P	W	W
		s) Degree of protection (Paper insertion method)	CR	Phy.	100%		One Panel/ type/lot	NTPC/Main supplier Appd drg./data sheet	NTPC/Main supplier Appd drg./data sheet	--DO--		P	W	W





ITEM : (MATERIAL, CLASS, GRADE, RATING, SIZE ETC.):
LIGHTING PANEL & LIGHTING DISTRIBUTION BOARDS

STANDARD QUALITY PLAN

Q.P. No. : 0000-999-QOE-S-034
 REV. : 01 DTD: 15/03/04
 PAGE 2 OF 3
 VALID UPTO :14.03.07

REVIEWED BY: S.D. SINGH, O.P. NIRANJAN, I. J. SINGH
 APPROVED BY: [Signature]
 QUALITY ASSURANCE
 APPROVED
 NTPC, NOIDA

LEGEND: RECORDS IDENTIFIED WITH "TICK" SHALL BE ESSENTIALLY INCLUDED BY THE CONTRACTOR IN QA DOCUMENTATION
 **M: MANUFACTURER/SUB-SUPPLIER, C:CONTRACTOR/NOMINATED INSPECTION AGENCY(SUBJECT TO PRIOR APPROVAL OF NTPC), N: NTPC. INDICATE "P" PERFORM "W" WITNESS AND "V" VERIFICATION AS APPROPRIATE
 "CHP" BY NTPC SHALL BE IDENTIFIED IN COLUMN "N" AS "W".
 FORMAT -QS-01-QAL-P-10/F2-R0

	ITEM : (MATERIAL, CLASS, GRADE, RATING, SIZE ETC.): LIGHTING PANEL & LIGHTING DISTRIBUTION BOARDS	STANDARD QUALITY PLAN	Q.P. No. : 0000-999-QOE-S-034 REV. : 01 DTD: 15/03/04 PAGE 3 OF 3 VALID UPTO :14.03.07	REVIEWED BY S.D. SINGH O.P. NIRANJAN I. J. SINGH	APPROVED BY  ANIL GUPTA
ANNEXURE 1 TO SQP NO. 0000 - 999 - QOE - S - 034 REV 01					
Sl. No	Item	Make	NOTE : Makes of major BOIs will be subject to NTPC approval / acceptance		
1 2 3 4 5 6 7 8 9 10 11 12 13	Indicating Meters Indicating lamp Current Transformer Potential Transformer Dry Type Transformer Timer MCB On-Off Switch Fuse Push Button Contactor Terminal Block Wires				
LEGEND: RECORDS IDENTIFIED IDENTIFIED WITH "TICK" SHALL BE ESSENTIALLY INCLUDED BY THE CONTRACTOR IN QA DOCUMENTATION					
** M: MANUFACTURER/SUB-SUPPLIER, C:CONTRACTOR/NOMINATED INSPECTION AGENCY. (SUBJECT TO PRIOR APPROVAL OF NTPC) N: NTPC. INDICATE "P" PERFORM "W" WITNESS AND "V"					
"CHP" BY NTPC SHALL BE IDENTIFIED IN COLUMN "N" AS "W".					

Note: Packing shall be witnessed as per Annexure - I to Quality Plan.

**PACKING SPECIFICATION FOR DISTRIBUTION BOARDS PACKAGE (LIGHTING
DISTRIBUTION BOARDS AND LIGHTING PANELS)**

ANNEXURE - I

DISTRIBUTION BOARDS (LDB & LP) shall be despatched in “Crate Packing” using wood.

1.0 PREPARATION OF PACKING CASES:

1.1 **DIMENSIONS:**

- 1.1.1 Minimum number of planks shall be used for a shook.
- 1.1.2 Thickness of planks for Front, rear, top and bottom sides and binding, jointing battens shall be 25/20mm +2/-3 mm
- 1.1.3 Horizontal, vertical, diagonal planks shall be given for binding
- 1.1.4 Width of binding planks shall be minimum 100mm
- 1.1.5 Distance between any 2 binding planks shall be less than 750mm
- 1.1.6 Diagonal planks shall be used in between vertical binding planks when distance between inner to inner of vertical planks is more than 750mm
- 1.1.7 Distance of the outer edges of these planks from the edge of case shall be less than 250mm.
- 1.1.8 Diagonal planks are not required for top planks and width side, if the width of pallet is less than 750mm.

1.2 JOINTING OF PLANKS:

Single length planks shall be used for cubicles whose overall length is less than 2400 mm. For cubicles of length more than 2400 mm, jointing is permitted. The jointing shall be done with one single or maximum of 2 planks of wood same as other planks of width 250 mm (minimum) with two rows of nails on either side of the joint in zigzag manner. From the joint along height side, it shall be of lap joint with overlap of at least the width of plank.

1.3 PERMISSIBLE DEFECTS

Wood shall be free from knots, bows, visible sign of infection and any kind of decay caused by insects, fungus, etc.

End splits: Longest end splits at each end shall be measured and lengths added together. The added length shall not exceed 60mm per meter run of shook's. Wood pins shall be used to prevent further development of split.

Surface cracks: Surface cracks with a maximum depth of 3mm are permissible. A continuous crack of any depth all along the length is not allowed.

1.4 OTHER MATERIALS

1.5.1 NAILS

Nils of suitable dia and length shall be used for joining the planks.

1.5.2 BLUE NAILS

If applicable, these shall be used for nailing bituminized Kraft paper/hessian cloth to the planks.

1.5.3 HOOP IRON STRIPS

These are used for strapping the boxes. The material shall be free from rust. If sufficient nailing is done for bigger boxes, strapping need not be done.

**PACKING SPECIFICATION FOR DISTRIBUTION BOARDS PACKAGE (LIGHTING
DISTRIBUTION BOARDS AND LIGHTING PANELS)**

1.5.4 CLIPS

These shall be used for strapping the hoop iron strips on the boxes.

1.5.5 BRACKETS

Brackets of suitable dimension shall be used for nailing to the corners of cubicle boxes. The brackets shall be of mild steel of suitable thickness. The brackets shall be of "L" shape. Two holes shall be provided towards the end of each side for screwing /nailing.

1.5.6 MULTI LAYERED CROSS LAMINATED POLYTHELENE FILM

Multi Layered Cross Laminated Polyethylene Film shall be used to make covers to the jobs individually. The cross lamination gives qualities of extra toughness, together with flexibility and lightness coupled with good weather resistance to ultra violet rays.

1.5.6 RUBBERISED COIR:

The rubberized coir is used as cushioning material. For the packing of loose items, items are to be arrested by using rubberized coir.

1.5.7 FASTENERS

Bolts, double nuts, spring washers will have to be used to hold the job to the bottom plank of the box so that there shall be no jerk on the DISTRIBUTION BOARDS (LDB & LP) during transit.

1.5.8 PACKING SLIP:

Packing slip kept in the polyethylene bag shall be placed in the box at appropriate place. In addition, one more packing slip covered in polyethylene cover and packing slip holder shall be nailed to front / rear of case.

1.5.9 MARKING PLATE:

Marking on the packing case shall be done as per the manufacturer standard.

4X210 MW + 3 X 500 MW NTPC KAHALGAON-FGD
BOQ CUM PRICE SCHEDULE OF DISTRIBUTION BOARDS (MAIN SUPPLY)

SL NO.	ITEM CODE	DESCRIPTION	UNIT	ORDERED QUANTITY
1.0		Lighting Distribution Board (LDB)		
1.1		AC LDB Type LDB-H (12)		
1.1.1	558-13002-A	AC LDB Type LDB-H (12) without transformer (including cubicle suitable for 2 no. 100 KVA transformer)	Nos.	4
1.1.2	558-13003-A	AC WDB Type WDB-H (12) without transformer (including cubicle suitable for 1 no. 100 KVA transformer)		3
1.1.3	558-13017-A	100 KVA transformer for housing in 1.1.1 & 1.1.2	Nos.	11
1.2		AC LDB Type LDB-F (8)		
1.2.1	558-13001-A	AC LDB Type LDB-F (8) without transformer (including cubicle suitable for 2 no. 50 KVA transformer)	Nos.	4
1.2.2	558-13018-A	50 KVA transformer for housing in 1.2.1	Nos.	8
1.3	558-13004-A	DC LDB Type LDB-D (12)	Nos.	2
2.0		Lighting Panels (LP)		
2.1	558-13009-A	AC Normal / Emergency indoor Type LP-A(12) [with timer]	Nos.	12
2.2	558-13010-A	AC Normal / Emergency Indoor Type LP-A (18) [with timer]	Nos.	12
2.3	558-13012-A	AC Normal / Emergency outdoor Type LP-A(12) [with timer]	Nos.	1
2.6	558-13006-A	AC Normal (Decorative) Type LP-A (12)	Nos.	2
2.7	558-13008-A	AC Normal (Decorative) Type LP-A (18)	Nos.	1
2.8	558-13019-A	DC Indoor Type LP-D (6)	Nos.	2
2.9	558-13016-A	Street Lighting Type LP-S (6)	Nos.	2

Notes :

1	Subsequent lots shall be cleared for manufacturing based on project requirements. Delivery completion of supply of each lot from the date of clearance of the quantities shall be as per NIT.
2	The total quantity variation shall be limited to (+) 25% of the total contract value derived on the basis of the ordered quantities.
3	The unit price quoted by bidder shall be binding for quantity variation (as per sl. No.3 above) which is at discretion of purchaser.
4	Design engineering charges are considered to be included in main equipment supply price. No separate charges shall be applicable.
5	Prices shall remain firm during contract execution.

2 X 500 MW NTPC SIPAT FGD System Package

BOQ CUM UNPRICE SCHEDULE FOR LIGHTING DISTRIBUTION BOARD

Item No.	DESCRIPTION	UNIT	ORDERED QTY.
	MAIN SUPPLY ITEMS		
1.0	Lighting Distribution Board (LDB)		
1.1	AC LDB Type LDB-H (12)		
1.1.1	AC LDB Type LDB-H (12) without transformer (including cubicle suitable for 2 nos. 100 kVA transformer)	Nos.	1
1.1.2	100kVA transformer for housing in 1.1.1 - Normal encapsulated type	Nos.	2
1.2	AC LDB Type LDB-F (8)		
1.2.1	AC LDB Type LDB-F (8) without transformer (including cubicle suitable for 2 nos. 50 kVA transformer)	Nos.	2
1.2.2	50kVA transformer for housing in 1.2.1 - Normal encapsulated type	Nos.	4
1.3	AC WDB Type WDB-H (12)		
1.3.1	AC WDB Type WDB-H (12) without transformer (including cubicle suitable for 1 no. 100 kVA transformer)	Nos.	1
1.3.2	100kVA transformer for housing in AC WDB	Nos.	1
1.4	DCLDB Type LDB-D (12)	Nos.	1
2.0	Lighting Panels (LP)		
2.1	LP – A (12) [with timer] Indoor type	Nos.	4
2.2	LP – A (18) [with timer] Indoor type	Nos.	2
2.3	Type LP – A (12) [with timer] (Decorative)	Nos.	1
2.4	LP – A (18) [with timer] Outdoor type	Nos.	7
2.5	DC indoor Type LP – D (6)	Nos.	2

	MANDATORY SPARES	UNIT	ORDER QUANTITY
1	Lighting Panels: Timer 24 hrs	NOS.	5

NOTES:			
1	Manufacturing of above quantities shall be done after the approval of technical & quality documentation, and supply of the same shall be completed as per NIT.		

- Subsequent lot shall be cleared for manufacture based on project requirement. Delivery completion of supply of each lot from the date of clearance of the quantities shall be as per NIT.
- 2

Delivery terms - DISTRIBUTION BOARDS

1. Delivery Schedule

- a. **Main Supply including quantity variation:** Delivery completion for Main supply shall be **... 195 ...** days from the PO date.
- b. **Mandatory Spares/Electrolyte/BHMS etc., (if applicable):** **..90..** days from BHEL clearance.

Notes:

- a. Supplier to start manufacturing/supply only after getting the applicable engineering Drgs. /docs approved from BHEL/End Customer.
- b. Drawings /documents submission/re-submission schedule shall be as indicated in technical specification which shall be used for progress monitoring purpose and required course correction, if any.
- c. The delivery date specified is for completion of the deliveries. Deliveries to start progressively so as to meet the completion schedule.
- d. The delivery conditions specified are for contractual purposes. However, to meet project requirement, BHEL may ask for early deliveries without any compensation thereof.

2. **Validity of contract (PO rates, terms and conditions):** Vendor has to make supply of goods/services as per the delivery time mentioned above. However, due to unavoidable circumstances if delay happens in providing inputs/ clearances (inputs, Engineering approvals, deputing inspector for inspection, issuance of MDCC and any hold imposed owing to site issues etc.) for which delivery time extension is admissible as per point no.3, in such situation it shall be obligatory at vendor part to execute the contract at PO rates, terms and conditions where inputs/ clearances has been accorded within validity of contract. Validity period for various activities shall be as defined below or as mentioned in the NIT.

2.1. Validity of the contract for main supply including quantity variation.

- Contract shall be valid for **...365..** days from the PO date. However, delay at vendor's end (if any) shall be added to the validity period and contract validity shall get extended by the delay period at vendor's end.

For example: Original Delivery period for main supply: A (in days)
Delay at vendor's end: B (in days beyond "A" days)
Contract validity: C+B (in days)

2.2. Validity of the contract for supply of mandatory spares/ Electrolyte/BHMS/ services (other than PG test) applicable in the contract:

- Validity of contract for supply of mandatory spares/ Electrolyte/BHMS/ services applicable in the contract shall be one year over and above contractual validity period for main supply including quantity variation as specified at point no. 2.1 above.

2.3. Validity of contract for Performance Guarantee (PG) test:

- Validity of contract for PG test shall be till completion of the PG Test.

Notes:

- a. B is the Vendor delay days beyond original contractual delivery period for main supply /extended delivery period owing to time taken by BHEL at point no. 2 above.
- b. Main supply including quantity variation, mandatory spares/ Electrolyte/BHMS/ services applicable in the contract released/ cleared for manufacturing within contractual validity period, to be supplied by vendor/supplier at PO rates, terms and conditions.
- c. Execution of the contract quantities released beyond contract validity period shall be decided on mutual consent basis at PO rates, terms and conditions.

3. Delivery Extension: Extension of contractual delivery time:

Delivery time mentioned in the NIT includes Engineering completion time (time for drawing/document submission/resubmission by the vendor and review/approval of the same by the BHEL/End customer), manufacturing, inspection, Packing and dispatch time. Due diligence is to be observed by the vendor to ensure timely completion of engineering and supply.

During the execution of the contract, time loss occurred owing to the reason attributable to BHEL besides force majeure shall be considered for delivery time extension to the vendor as given below: -

- i. Any Delay in providing comments/ approval on Primary drawing/documents beyond the stipulated time as specified in NIT.
- ii. Time Loss in approval of the drawing/document as a result of increase in the iteration not attributable to the vendor (i.e. resubmission owing to end customer comments) as certified by BHEL. Time extension equivalent to the resubmission time noted in the tech. spec and consequential increase in the approval time in lieu of increase in iteration shall be applicable. However, for incomplete re- submission time loss shall be in vendor account.
- iii. Delay in providing engineering input/material by BHEL.
- iv. Delay in deputing inspector for inspection and delay in release of MDCC in line with GCC/ GEM ATC terms.
- v. Any hold put by BHEL for whatever reasons during execution of contract (within contract validity period), time extension equivalent to hold period shall be admissible. However, in the event hold period continues for more than 30 days then, an additional fifteen days for the purposes of mobilization and demobilization of resources shall also be admissible.

Note: Extension in delivery period if any with or without imposition of LD shall be considered after detailed delay analysis based on provisions given above. However, no delay analysis will be applicable if supply is completed within delivery schedule as specified in Purchase order.

ANNEXURE II TO RISK & COST

1. In case of delays (beyond the maximum late delivery period as per LD clause) in supplies, or if there be defective supplies or non-fulfilment of any other terms and conditions of the Contract as enumerated subsequently in this clause, then, without prejudice to its right to recover any expenses, losses or damages to which the Buyer may be put in or sustain by reason of the Seller/Contractor's default or breach of Order/Contract or to suspend business dealings with the Seller/Contractor in terms of the Buyers' Guidelines for Suspension of Business Dealings as applicable from time to time, the Buyer shall also be entitled to cancel the Order/Contract either in whole or portion thereof without compensation to Seller. On the occurrence of any of the acts/omissions mentioned below, the Buyer may if it so desires, procure upon such terms and in such manner as deemed appropriate, plant/equipment/ stores not so delivered or others of similar description where plant/ equipment/ stores exactly complying with particulars are not, in the opinion of the Buyer (which shall be final), readily procurable, at the risk and cost of the Seller.

The Seller shall be liable to the Buyer for any excess costs incurred thereof and the Seller shall continue the performance of the Order/Contract to the extent not cancelled under the provisions of this clause. The Seller shall on no account be entitled to any gain on such repurchases. If the Bidder does not agree to this Risk Purchase clause, BHEL reserves the right to reject the bid/offer of the Bidder. The order/contract may be cancelled in whole or part thereof and Risk & Cost Clause in line with terms and conditions of PO/Contract may be invoked by the Buyer in any of the following cases:

- i. If the Seller/Contractor fails to deliver the goods or materials or any instalment thereof within the period(s) fixed for such delivery or the Seller's poor progress of the supply/services vis-à-vis delivery/execution timeline as stipulated in the contract, backlog attributable to the Seller including unexecuted portion of supply does not appear to be executable within balance period available;
- ii. delivering goods or materials not of the contracted quality and failing to adhere to the contract specifications/execution methodology;
- iii. withdrawal from or repudiation/abandonment of the supply/services by the Seller before completion as per contract or if the Seller refuses or is unable to supply goods or materials covered by the order/Contract either in whole or in part or otherwise fails to perform the Order/Contract.
- iv. Non supply by the Seller within scheduled completion/delivery period as per contract or as extended from time to time for reasons attributable to the Seller;
- v. Termination of Contract on account of any other reason(s) attributable to the Seller.
- vi. Assignment, transfer, sub-letting of Contract without BHEL's written permission resulting in termination of Contract or part thereof by BHEL.
- vii. If the Seller be an individual or a Sole Proprietorship, in the event of death or insanity of the Seller.
- viii. If the Seller/Contractor being an individual or if a partnership firm thereof, shall at any time be adjudged insolvent or shall have a receiving order for administration of his estate made against him or shall take any proceeding for composition under any Insolvency Act for the time being in force or make any assignment of the order/Contract or enter into any arrangement or composition with his creditors or suspend payment or if the firm dissolved under the Partnership Act;
- ix. If the Seller/Contractor being a Company is wound up voluntarily or by order of a Court or a Receiver, Liquidator or Manager on behalf of the debenture holders and creditors is appointed or circumstances have arisen which entitles the Court of debenture holder and creditors to appoint a receiver, liquidator or manager
- x. Non- Compliance to any contractual condition or any other default attributable to the Seller.

Such defaulting vendor/Seller shall not be eligible to participate in re-tendering conducted on account of risk purchase made due to fault of such vendor/Seller.

1425470/2023/PS-PEM-PGIII

2. BHEL's right to go for Risk and Cost, Calculation of Risk and Cost amount & L D, recovery options to BHEL are given as under: -

2.1 BHEL reserves the right to terminate the contract or withdraw portion of work and get it done through other agency, at the risk and cost of the contractor *after due notice of a period of 14 days' by BHEL* in any of the following cases:

- i) If the Seller/Contractor fails to deliver the goods or materials or any instalment thereof within the period(s) fixed for such delivery or the Seller's poor progress of the supply/ services vis-a-vis delivery/execution timeline as stipulated in the Contract, backlog attributable to seller including unexecuted portion of supply does not appear to be executable within balance available period;
- ii) Delivering goods or materials not of the contracted quality and failing to adhere to the contract specifications;
- iii) Withdrawal from or repudiation/ abandonment of the supply/ services by Seller before completion as per contract or if the Seller refuses or is unable to supply goods or materials covered by the Order/Contract either in whole or in part or otherwise fails to perform the Order/Contract;
- iv) Non-supply by the Seller within scheduled completion/delivery period as per Contract or as extended from time to time, for the reasons attributable to the Seller;
- v) Termination of Contract on account of any other reason (s) attributable to Seller.
- vi) Assignment, transfer, subletting of Contract without BHEL's written permission resulting in termination of Contract or part thereof by BHEL.
- vii) If the Seller be an individual or a sole proprietorship Firm, in the event of the death or insanity of the Seller;
- viii) If the Seller/Contractor being an individual or if a firm on a partnership thereof, shall at any time, be adjudged insolvent or shall have a receiving order for administration of his estate made against him or shall take any proceeding for composition under any Insolvency Act for the time being in force or make any assignment of the Order/Contract or enter into any arrangement or composition with his creditors or suspend payment or if the firm dissolved under the Partnership Act;
- ix) If the Seller/Contractor being a company is wound up voluntarily or by order of a Court or a Receiver, Liquidator or Manager on behalf of the debenture holders and creditors is appointed or circumstances shall have arisen which entitles the Court of debenture holder and creditors to appoint a receiver, liquidator or manager;
- x) Non-compliance to any contractual condition or any other default attributable to Seller.

2.1.1 Risk & Cost Amount against Balance Work:

Risk & Cost amount against balance work shall be calculated as follows:

$$\text{Risk \& Cost Amount} = [(A-B) + (A \times H/100)]$$

Where,

A= Value of Balance scope of Work (*) as per rates of new contract

B= Value of Balance scope of Work (*) as per rates of old contract being paid to the contractor at the time of termination of contract i.e. inclusive of PVC & ORC, if any.

H = Overhead Factor to be taken as 5

In case (A-B) is less than 0 (zero), value of (A-B) shall be taken as 0 (zero).

2.1.2 Balance scope of work (in case of termination of contract):

Difference of Contract Quantities and Executed Quantities as on the date of issue of Letter for 'Termination of Contract', shall be taken as balance scope of Work for calculating risk & cost amount.

Contract quantities are the quantities as per original contract. If, Contract has been amended, quantities as per amended Contract shall be considered as Contract Quantities.

Items for which total quantities to be executed have exceeded the Contract Quantities based on drawings issued to contractor from time to time till issue of Termination letter, then for these items total Quantities as per issued drawings would be deemed to be contract quantities.

Substitute/ extra items whose rates have already been approved would form part of contract quantities for this purpose.

Substitute/ extra items which have been executed but rates have not been approved, would also form part of contract quantities for this purpose and rates of such items shall be determined in line with contractual provisions.

However, increase in quantities on account of additional scope in new tender shall not be considered for this purpose.

NOTE: In case portion of work is being withdrawn at risk & cost of contractor instead of termination of contract, contract quantities pertaining to portion of work withdrawn shall be considered as 'Balance scope of work' for calculating Risk & Cost amount.

2.1.3 LD against delay in executed work in case of Termination of Contract:

LD against delay in executed work shall be calculated in line NIT terms & conditions, for the delay attributable to contractor. For limiting the maximum value of LD, contract value shall be taken as Executed Value of work till termination of contract.

Method for calculation of LD against delay in executed work in case of termination of contract" is given below:

- i. Let the time period from scheduled date of start of work till termination of contract excluding the period of Hold (if any) not attributable to contractor = T1
- ii. Let the value of executed work till the time of termination of contract = X
- iii. Let the Total Executable Value of work for which inputs/fronts were made available to contractor and were planned for execution till termination of contract = Y
- iv. Delay in executed work attributable to contractor i.e. $T2 = [1 - (X/Y)] \times T1$
- v. LD shall be calculated in line with LD clause (clause 16) of the Contract for the delay attributable to contractor taking "X" as Contract Value and "T2" as period of delay attributable to contractor.

2.2 Recoveries arising out of Risk & Cost and LD or any other recoveries due from Contractor:

Without prejudice to the other means of recovery of such dues from the Seller recoveries from the Seller on whom risk

& cost has been invoked shall be made from the following:

- a) Dues available in the form of Bills payable to seller, SD, BGs against the same contract.
- b) Dues payable to seller against other contracts in the same Region/Unit/ Division of BHEL.
- c) Dues payable to seller against other contracts in the different Region/Unit/ division of BHEL.

In-case recoveries are not possible with any of the above available options, Legal action shall be initiated for recovery against contractor.

एनटीपीसी NTPC	CORPORATE QUALITY ASSURANCE/ कॉरपोरेट गुणवत्ता आश्वासन SUB-VENDOR QUESTIONNAIRE/ सब-वेंडर प्रश्नावली
--------------------------	---

i.	Item/Scope of Sub-contracting उप-संविदा(अनुबंध) का मद/ दायरा	
ii.	Address of the registered office पंजीकृत कार्यालय का पता	Details of Contact Person संपर्क व्यक्ति का विवरण (Name, Designation, Mobile, Email) (नाम, पदनाम, मोबाइल, ईमेल)
iii.	Name and Address of the proposed Sub-vendor's works where item is being manufactured प्रस्तावित उप-विक्रेता के कार्यों का नाम और पता, जहां मद का निर्माण किया जा रहा है	Details of Contact Person: संपर्क व्यक्ति का विवरण (Name, Designation, Mobile, Email) (नाम, पदनाम, मोबाइल, ईमेल)
iv.	Annual Production Capacity for proposed item/scope of sub-contracting उप-संविदा(अनुबंध) के प्रस्तावित मद / दायरे के लिए वार्षिक उत्पादन क्षमता	
v.	Annual production for last 3 years for proposed Item/scope of sub-contracting उप-संविदा(अनुबंध) के प्रस्तावित मद / दायरे के लिए पिछले 3 वर्षों का वार्षिक उत्पादन	
vi.	Details of proposed works प्रस्तावित कार्यों का विवरण	
1.	Year of establishment of present works वर्तमान फैक्टरी की स्थापना का वर्ष	
2.	Year of commencement of manufacturing at above works उपरोक्त फैक्टरी में निर्माण कार्य शुरू होने का वर्ष	
3.	Details of change in Works address in past (if any पूर्व में फैक्टरी स्थल में परिवर्तन का विवरण (यदि कोई हो))	
4.	Total Area कुल क्षेत्र Covered Area शामिल क्षेत्र	
5.	Factory Registration Certificate फैक्टरी पंजीकरण प्रमाण पत्र	Details attached at Annexure – F2.1 विवरण अनुलग्नक- एफ 2.1 पर संलग्न है
6.	Design/ Research & development set-up डिजाइन / अनुसंधान और विकास सेटअप (No. of manpower, their qualification, machines & tools employed etc.) (श्रमिकों की संख्या, उनकी योग्यता, मशीन और उपलब्ध उपकरण आदि)	Applicable / Not applicable if manufacturing is as per Main Contractor/purchaser design) Details attached at Annexure – F2.2 (if applicable) लागू / लागू नहीं, अगर विनिर्माण मुख्य संविदाकार / खरीददार के डिजाइन के अनुसार है) विवरण अनुलग्नक –एफ 2.2 पर संलग्न है। (यदि लागू हो)
7.	Overall organization Chart with Manpower Details (Design/Manufacturing/Quality etc) मैनपावर विवरण के साथ समग्र संगठन का चार्ट(डिजाइन / विनिर्माण / गुणवत्ता आदि)	Details attached at Annexure – F2.3 विवरण अनुलग्नक – F2.3 में संलग्न है।



CORPORATE QUALITY ASSURANCE/ कॉरपोरेट गुणवत्ता आश्वासन
SUB-VENDOR QUESTIONNAIRE/ सब-वेंडर प्रश्नावली

8.	<i>After sales service set up in India, in case of foreign sub-vendor(Location, Contact Person, Contact details etc.)</i> भारत में विक्री सेवा की स्थापना के बाद, विदेशी उप-विक्रेता के मामले में (स्थल, संपर्क व्यक्ति, संपर्क विवरण आदि)	<i>Applicable / Not applicable</i> लागू / लागू नहीं <i>Details attached at Annexure – F2.4</i> विवरण अनुलग्नक -2.4 पर संलग्न है।			
9.	<i>Manufacturing process execution plan with flow chart indicating various stages of manufacturing from raw material to finished product including outsourced process, if any</i> फ्लोचार्ट सहित विनिर्माण प्रक्रिया निष्पादन योजना, जिसमें आउटसोर्स प्रक्रिया, यदि कोई हो, सहित कच्चे माल से तैयार उत्पाद तक विनिर्माण के विभिन्न चरणों को दर्शाया गया हो,	<i>Details attached at Annexure – F2.5</i> विवरण अनुलग्नक - F2.5में संलग्न है।			
10.	<i>Sources of Raw Material/Major Bought Out Item</i> कच्चे माल के स्रोत / खरीदे हुए मुख्य मद	<i>Details attached at Annexure – F2.6</i> विवरण अनुलग्नक - F2.6में संलग्न है।			
11.	<i>Quality Control exercised during receipt of raw material/BOI, in-process , Final Testing, packing</i> कच्चे माल / खरीदे हुए मद, प्रक्रियाबद्ध, अंतिम परीक्षण, पैकिंग करते समय गुणवत्ता नियंत्रण	<i>Details attached at Annexure – F2.7</i> विवरण अनुलग्नक - F2.7 पर संलग्न है।			
12.	<i>Manufacturing facilities (List of machines, special process facilities, material handling etc.)</i> विनिर्माण सुविधा (मशीनों की सूची, विशेष प्रक्रिया सुविधाएं, सामग्री रख-रखाव आदि)	<i>Details attached at Annexure – F2.8</i> विवरण अनुलग्नक - F2.8में संलग्न है।			
13.	<i>Testing facilities (List of testing equipment)</i> परीक्षण सुविधाएं (परीक्षण उपकरण की सूची)	<i>Details attached at Annexure – F2.9</i> विवरण अनुलग्नक - F2.9 में संलग्न है।			
14.	<i>If manufacturing process involves fabrication then-</i> यदि निर्माण प्रक्रिया में फेब्रिकेशन की गई है तो- <i>List of qualified Welders</i> पात्र वेल्डर की सूची <i>List of qualified NDT personnel with area of specialization</i> विशेषज्ञता के क्षेत्र सहित पात्र एनडीटी कार्मिकों की सूची	<i>Applicable / Not applicable</i> लागू / लागू नहीं <i>Details attached at Annexure – F2.10</i> विवरण अनुलग्नक - F2.10में संलग्न है। <i>(If applicable)</i> लागू / लागू नहीं			
15.	<i>List of out-sourced manufacturing processes with Sub-Vendors' names & addresses</i> सब-वेंडर द्वारा बाह्य स्रोतों (उनके नाम और पते सहित)से करवाएं गए निर्माण प्रक्रियाओं की सूची	<i>Applicable / Not applicable</i> लागू / लागू नहीं <i>Details attached at Annexure. –F2.11</i> विवरण अनुलग्नक - F2.10में संलग्न है। <i>(If applicable)</i> (यदि लागू हो)			
16.	<i>Supply reference list including recent supplies</i> नवीनतम आपूर्ति सहित आपूर्ति संदर्भ सूची	<i>Details attached at Annexure – F2.12</i> विवरण अनुलग्नक - F2.12 में संलग्न है। <i>(as per format given below)</i> (नीचे दिए गए प्रारूप के अनुसार)			
<i>Project/ package</i> परियोजना / पैकेज	<i>Customer Name</i> ग्राहक का नाम	<i>Supplied Item (Type/Rating/Model /Capacity/Size etc)</i> आपूर्ति की गई वस्तु (प्रकार / रेटिंग / मॉडल / क्षमता / आकार आदि)	<i>PO ref no/date</i> पीओ संदर्भ सं. / तिथि	<i>Supplied Quantity</i> आपूर्ति की मात्रा	<i>Date of Supply</i> आपूर्ति की तारीख
17.	<i>Product satisfactory performance feedback letter/certificates/End User Feedback</i> उत्पाद के संतोषजनक प्रदर्शन संबंधी फीडबैक पत्र / प्रमाण पत्र / अंतिम उपयोगकर्ता फीडबैक	<i>Attached at annexure - F2.13</i> अनुलग्नक F2. 3पर संलग्न है			



CORPORATE QUALITY ASSURANCE/ कॉरपोरेट गुणवत्ता आश्वासन
SUB-VENDOR QUESTIONNAIRE/ सब-वेंडर प्रश्नावली

18.	Summary of Type Test Report (Type Test Details, Report No, Agency, Date of testing) for the proposed product (similar or higher rating) प्रस्तावित उत्पाद (एक समान या उच्च रेटिंग वाले) के लिए टाइप टेस्ट रिपोर्ट (टाइप टेस्ट विवरण, रिपोर्ट संख्या, एजेंसी, जांच की तारीख) का सारांश नोट: - रिपोर्ट प्रस्तुत करने की आवश्यकता नहीं है Note:- Reports need not to be submitted	Applicable / Not applicable लागू / लागू नहीं Details attached at Annexure – F2.14 विवरण अनुलग्नक - F2.1 4में संलग्न है (if applicable) (यदि लागू हो)			
19.	Statutory / mandatory certification for the proposed product प्रस्तावित उत्पाद के लिए वैधानिक / अनिवार्य प्रमाणीकरण	Applicable / Not applicable लागू / लागू नहीं Details attached at Annexure – F2.15 (if applicable) (यदि लागू हो)			
20.	Copy of ISO 9001 certificate आईएसओ 9001 प्रमाण पत्र की प्रति (if available) (यदि उपलब्ध हो)	Attached at Annexure – F2.16 अनुलग्नक में संलग्न - F2.1 6 है			
21.	Product technical catalogues for proposed item (if available) प्रस्तावित मद के लिए उत्पाद तकनीकी कैटलॉग (यदि उपलब्ध हो)	Details attached at Annexure – F2.17 विवरण अनुलग्नक - F2.1 7 में संलग्न है			
Name: नाम:			Desig: पद:	Sign: हस्ता क्षर:	Date: तिथि:

Company's Seal/Stamp:- कंपनी की मुहर / मोहर: -