
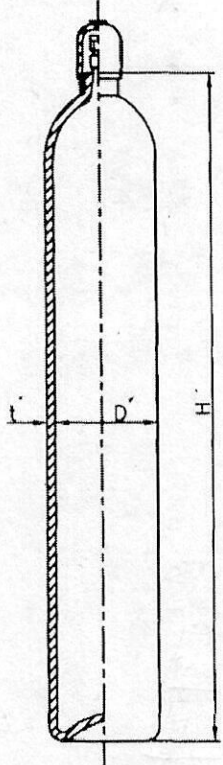


REF.	Comp. Dig.	 Form No. 2038	उत्पाद मानक परिणामित्र शाप/अभि.निर्देश	PRODUCT STANDARD TRANSFORMER SHOP / ENGG. INSTRUCTIONS	TR20169C																															
			1 पृष्ठों में 1	PAGE 1 OF 1																																
TITLE: SPECIFICATION FOR DRY AIR AND DRY AIR CYLINDER																																				
A. DRY AIR CYLINDER			Material code- BP9096059549																																	
<table border="1"> <tr> <td>Water capacity (Liters)</td> <td>46.7</td> </tr> <tr> <td>Gas Capacity (m³)</td> <td>7 at min. pressure of 135 kg/cm²</td> </tr> <tr> <td>Maximum working pressure (kg/cm² at 15°C)</td> <td>150</td> </tr> <tr> <td>Hydraulic Test Pressure (kg/cm²)</td> <td>250</td> </tr> <tr> <td rowspan="6">Nominal Dia.(approx.)</td> <td rowspan="2">Inside (d)</td> <td>221</td> </tr> <tr> <td>Spun Type</td> </tr> <tr> <td rowspan="4">Outside (D)</td> <td>218.0</td> </tr> <tr> <td>Solid Drawn</td> </tr> <tr> <td>232</td> </tr> <tr> <td>Spun type</td> </tr> <tr> <td rowspan="2">Minimum wall thickness : t (mm)</td> <td>230</td> </tr> <tr> <td>Solid Drawn</td> </tr> <tr> <td rowspan="3">Total length approx. (H) mm. without valve & cap</td> <td>5.5</td> </tr> <tr> <td>Spun type</td> </tr> <tr> <td>6.0</td> </tr> <tr> <td rowspan="3">Tare weight excluding valve & cap approx. (kg.)</td> <td>Solid Drawn</td> </tr> <tr> <td>1370</td> </tr> <tr> <td>Spun type</td> </tr> <tr> <td></td> <td>1405</td> </tr> <tr> <td></td> <td>Solid Drawn</td> </tr> </table>			Water capacity (Liters)	46.7	Gas Capacity (m ³)	7 at min. pressure of 135 kg/cm ²	Maximum working pressure (kg/cm ² at 15°C)	150	Hydraulic Test Pressure (kg/cm ²)	250	Nominal Dia.(approx.)	Inside (d)	221	Spun Type	Outside (D)	218.0	Solid Drawn	232	Spun type	Minimum wall thickness : t (mm)	230	Solid Drawn	Total length approx. (H) mm. without valve & cap	5.5	Spun type	6.0	Tare weight excluding valve & cap approx. (kg.)	Solid Drawn	1370	Spun type		1405		Solid Drawn		
Water capacity (Liters)	46.7																																			
Gas Capacity (m ³)	7 at min. pressure of 135 kg/cm ²																																			
Maximum working pressure (kg/cm ² at 15°C)	150																																			
Hydraulic Test Pressure (kg/cm ²)	250																																			
Nominal Dia.(approx.)	Inside (d)	221																																		
		Spun Type																																		
	Outside (D)	218.0																																		
		Solid Drawn																																		
		232																																		
		Spun type																																		
Minimum wall thickness : t (mm)	230																																			
	Solid Drawn																																			
Total length approx. (H) mm. without valve & cap	5.5																																			
	Spun type																																			
	6.0																																			
Tare weight excluding valve & cap approx. (kg.)	Solid Drawn																																			
	1370																																			
	Spun type																																			
	1405																																			
	Solid Drawn																																			
B. DRY AIR			Material code- BP9096059557																																	
<table border="1"> <tr> <td>O₂</td> <td>21.5+/-2 ppmv</td> </tr> <tr> <td>N₂</td> <td>78.5+/-2 ppmv</td> </tr> <tr> <td>Purity</td> <td>95.95% minimum</td> </tr> <tr> <td colspan="2">Acceptable Impurity level: H₂O ≤4ppmv, CO₂ ≤ 2ppmv, THC ≤ 2 ppmv</td> </tr> <tr> <td>Dew Point Temperature (minimum)</td> <td>-60 °C</td> </tr> </table>			O ₂	21.5+/-2 ppmv	N ₂	78.5+/-2 ppmv	Purity	95.95% minimum	Acceptable Impurity level: H ₂ O ≤4ppmv, CO ₂ ≤ 2ppmv, THC ≤ 2 ppmv		Dew Point Temperature (minimum)	-60 °C																								
O ₂	21.5+/-2 ppmv																																			
N ₂	78.5+/-2 ppmv																																			
Purity	95.95% minimum																																			
Acceptable Impurity level: H ₂ O ≤4ppmv, CO ₂ ≤ 2ppmv, THC ≤ 2 ppmv																																				
Dew Point Temperature (minimum)	-60 °C																																			
NOTES: <ol style="list-style-type: none"> Cylinder shall be generally as per IS:7285. Cylinder shall be fitted with valve to IS:3224. T.C. for each cylinder and approval letter from chief controller of explosives Nagpur shall be furnished. 																																				
पुनः Rev. 01 Dt. 22.04.19	Style Number added. NKM AMULYA	वितरण DISTRIBUTION. TRE/TRM/FTM/ TRX/TTG /QC-TCB/QA-TCB /JHANSI	सं. स्वीकृत किया : APPROVED : sd/ A. DEOTA जारी किया ISSUED टीआरई मानक /TRE/STD तैयार किया:-PREPD. NM	दिनांक: DATE: 23.01.19																																