



भारत हेवी इलेक्ट्रिकल्स लिमिटेड

(भारत सरकार का उपक्रम)

BHARAT HEAVY ELECTRICALS LIMITED

(A Govt. of India Undertaking)

Ref: PSER:SCT:RGN-S2098:8476

Date: 20-02-2021

NOTICE INVITING TENDER

NOTE: INTENDING BIDDER TO PARTICIPATE MAY DOWNLOAD FROM WEB SITES

Sealed offers in two part bid system are invited from reputed & experienced bidders meeting PRE QUALIFICATION CRITERIA as mentioned in Annexure-1 through E-Procurement Portal <https://eprocurebhel.co.in> only, for the subject job by the undersigned on the behalf of BHARAT HEAVY ELECTRICALS LIMITED as per the tender document. Issue/ forwarding intimation regarding tender to any bidder shall not construe that the bidder is considered to be qualified. Following points relevant to the tender may please be noted and complied with.

1.0 Salient Features of NIT

SL NO	ISSUE	DESCRIPTION
i	TENDER NUMBER	PSER:SCT:RGN-S2098:21.
ii	Broad Scope of job	Receipt, unloading, storage, Material Handling, Dismantling, material movement, New Material Erection, Re-Erection of Old Items, Modification of existing Items, Restoration, Commissioning, Testing & PG Test etc. of Combustion modification system for NOx mitigation of DVC Raghunathpur TPS(2x600 MW) U#1,2, PURULIA, West Bengal.
iii	DETAILS OF TENDER DOCUMENT	
a	Volume-IA	General conditions of contract (Supply) Not Applicable.
b	Volume-IB	General conditions of contract (Service) Applicable.
c	Volume-IC	Special conditions of contract (Supply) Not Applicable.
d	Volume-ID	Special conditions of contract (Service) Applicable.
e	Volume-IE	Forms and Procedures etc. Applicable.
f	Volume-IF	Technical Conditions of Contract (TCC) Applicable.
g	Volume-III	Price Schedule (Absolute value) – Rev-00 Applicable.
iv	ISSUE OF TENDER DOCUMENTS	This is an E-tender floated online through our E-Procurement Site https://eprocurebhel.co.in . Start date of the tender: 20-02-2021 Applicable.
v	DUE DATE & TIME OF OFFER SUBMISSION	Date: 02-03-2021, Time: 13-00 Hrs. IST The bidder should respond by submitting their offer online in our e-Procurement platform at https://eprocurebhel.co.in only. Offers are invited in two-parts only. Hard copy bid or bids through email/fax shall not be accepted. Applicable.
vi	OPENING OF TENDER	Date: 02-03-2021 4 hours after the latest due date and time of Offer submission Notes: (1) In case the due date of opening of tender becomes a non-working day, tenders shall be opened on next working day at the same time. (2) Bidder may depute representative to witness the opening of tender. Applicable.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

vii	EMD AMOUNT	--	Not Applicable.
viii	COST OF TENDER	--	Not Applicable.
ix	LAST DATE FOR SEEKING CLARIFICATION	Date: 24-02-2021. Along with soft version also, addressing to undersigned & to others as per contact address given below	Applicable.
x	SCHEDULE OF Pre Bid Discussion (PBD)	Date: 24-02-2021; Time: 14=00 Hrs Venue: BHEL-PSER-HQ-KOLKATA OFFICE	Applicable
xi	INTEGRITY PACT & DETAILS OF INDEPENDENT EXTERNAL MONITOR (IEM)	--	Not Applicable.
xii	Latest updates	Latest updates on the important dates, Amendments, Correspondences, Corrigenda, Clarifications, Changes, Errata, Modifications, Revisions, etc to Tender Specifications will be hosted in BHEL webpage (www.bhel.com) ; CPP portal & E-Procurement Site https://eprocurebhel.co.in only. Bidders to keep themselves updated with all such information.	Shall be intimated to bidder.
xiii	Evaluation Currency	Indian Rupees (INR)	

- 2.0 The offer shall be submitted as per the instructions of tender document and as detailed in this NIT. Bidders to note specifically that all pages of tender document, including these NIT pages of this particular tender together with subsequent correspondences shall be submitted by them, duly digitally signed & stamped on each page, as part of offer. Rates/Price including discounts/rebates, if any, mentioned anywhere/ in any form in the techno-commercial offer other than the Price Bid, shall not be entertained.
- 3.0 Unless specifically stated otherwise, bidder shall remit cost of tender (non-refundable) and courier charges if applicable, in the form of Demand Draft drawn in favour of Bharat Heavy Electricals Ltd, payable at Kolkata, issuing the Tender, along with techno-commercial offer.
- 4.0 Unless specifically stated otherwise, bidder shall have to deposit EMD through Demand Draft/Pay Order in favour of Bharat Heavy Electricals Ltd, payable at Kolkata. For Electronic Fund Transfer, please refer RTGS details of BHEL available in Volume-IE.
For other details please refer General Conditions of Contract.
Bidders may please be noted that "OEMD" provision stands deleted. Hence, bidders who have deposited Rs. 2 Lakh as OEMD are also requested to submit fresh EMD as mentioned in sl no vii under clause no 1.0 of NIT.
- 5.0 Procedure for Submission of Tenders: The Tenderers must submit their Tenders as detailed below:

DOCUMENTS TO BE UPLOADED & MODALITY OF UPLOADING

Sl no	Description	Remarks
PART-I A	(TECHNO COMMERCIAL BID)	
	CONTAINING THE FOLLOWING:-	
i.	Covering letter/Offer forwarding letter of Tenderer. (To be attached in relevant Attachment section)	
ii.	Duly filled-in 'No Deviation Certificate' as per prescribed format. (To be attached in relevant Attachment section) <u>Note:</u> a. In case of any deviation, the same should be submitted separately for technical & commercial parts, indicating respective clauses of tender against which deviation is taken	

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

	by bidder. The list of such deviation shall be attached in relevant attachment section of the e –procurement portal. It shall be specifically noted that deviation recorded elsewhere shall not be entertained. b. BHEL reserves the right to accept/reject the deviations without assigning any reasons, and BHEL decision is final and binding. i). In case of acceptance of the deviations, appropriate loading shall be done by BHEL ii). In case of unacceptable deviations, BHEL reserves the right to reject the tender	
iii.	Supporting documents/ annexures / schedules/ drawing etc as required in line with Pre-Qualification criteria. It shall be specifically noted that all documents as per above shall be attached in relevant attachment section and credential certificates issued by clients shall distinctly bear the name of organization, contact ph no, FAX no, etc.	
iv.	All Amendments/Correspondences/Corrigenda/Clarifications/Changes/ Errata etc pertinent to this NIT. (To be attached in relevant Attachment section)	
v.	Integrity Pact Agreement (Duly signed by the authorized signatory)	Not Applicable
vi.	Duly filled-in annexures, formats etc as required under this Tender Specification/NIT (To be attached in relevant Attachment section)	
vii.	Notice inviting Tender (NIT) (To be attached in relevant Attachment section)	
viii.	Volume – I F: Technical Conditions of Contract (TCC) (To be attached in relevant Attachment section)	
ix.	Volume – I D: Special Conditions of Contract (SCC)-Service (To be attached in relevant Attachment section)	
x.	Volume – I B: General Conditions of Contract (GCC)-Service (To be attached in relevant Attachment section)	
xii.	Volume – I E: Forms & Procedures etc. (To be attached in relevant Attachment section)	
xiii.	Volume–III - (UNPRICED – without disclosing rates/price, but mentioning only 'QUOTED' or 'UNQUOTED' against each item. (To be attached in Unpriced Bid Attachment section)	
xiv.	Any other details preferred by bidder with proper indexing. (To be attached in relevant Attachment section)	

PART-I B	EMD/ COST OF TENDER – (To be submitted offline within due date of offer submission)- Not Applicable for this tender.	
	CONTAINING THE FOLLOWING:-	
i.	1. Earnest Money Deposit (EMD) in the form as indicated in this Tender 2. Cost of Tender (Demand Draft or copy of Cash Receipt as the case may be)	

PART-II	PRICE BID (TO BE ATTACHED IN PRICE BID ATTACHMENT SECTION)	
	CONTAINING THE FOLLOWING:-	

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

i	Covering letter/Offer forwarding letter of Tenderer enclosed in Part-I	
ii	Volume III – PRICE BID (Duly Filled in Schedule of Rates – rate/price to be entered in words as well as figures) Any other document uploaded in the price bid, apart from above tender format, shall not be taken into cognizance for evaluation of offer.	

SPECIAL NOTE:

- A) Your offer & documents submitted along with offer shall be digitally signed & stamped in each page by your authorised representative. No overwriting/ correction in tender documents by bidders shall be allowed. However, if correction is unavoidable, the same may be signed by authorized signatory.
- B) The credentials/ documents submitted towards compliance of Pre-qualification requirement shall be physically signed by the authorized signatory & stamped before uploading/submission with the offer in the e-procurement portal.
- C) All documents/ annexures submitted with the offer shall be properly attached in the respective sections. BHEL shall not be responsible for any missing documents.
- 6.0 No Deviation with respect to tender clauses and no additional clauses/ suggestions/ in Techno-commercial bid/ Price bid shall normally be considered by BHEL. Bidders are requested to positively comply with the same.
- 7.0 BHEL reserves the right to accept or reject any or all Offers without assigning any reasons thereof. BHEL also reserves the right to cancel the Tender wholly or partly without assigning any reason thereof. Also BHEL shall not entertain any correspondence from bidders in this matter (except for the refund of EMD).
- 8.0 Assessment of Capacity of Bidders: NOT APPLICABLE.
- 9.0 Since the job shall be executed at site, bidders must visit site/ work area and study the job content, facilities available, availability of materials, prevailing site conditions including law & order situation, applicable wage structure, wage rules, etc before quoting for this tender. They may also consult this office before submitting their offers, for any clarifications regarding scope of work, facilities available at sites or on terms and conditions.
- 10.0 For any clarification on the tender document, the bidder may seek the same in writing, through e-mail or through E-Procurement Site <https://eprocurebhel.co.in>, as per specified format, within the scheduled date for seeking clarification, from the office of the undersigned. BHEL shall not be responsible for receipt of queries after due date of seeking clarification due to any delay. Any clarification / query received after last date for seeking clarification may not be normally entertained by BHEL and no time extension will be given.
- 11.0 BHEL may decide holding of pre-bid discussion [PBD] with all intending bidders as per date indicated in the NIT. The bidder shall ensure participation for the same at the appointed time, date and place as may be decided by BHEL. Bidders shall plan their visit accordingly. The outcome of pre-bid discussion (PBD) shall also form part of tender.
- 12.0 In the event of any conflict between requirement of any clause of this specification/ documents/drawings/data sheets etc or requirements of different codes/standards specified, the same to be brought to the knowledge of BHEL in writing for clarification before due date of seeking clarification (whichever is applicable), otherwise, interpretation by BHEL shall prevail. Any typing error/missing pages/ other clerical errors in the tender documents, noticed must be pointed out before pre-bid meeting/submission of offer else BHEL's interpretation shall prevail.
- 13.0 Unless specifically mentioned otherwise, bidder's quoted price shall deemed to be in compliance with tender including PBD.
- 14.0 Bidders shall submit Integrity Pact Agreement (Duly signed by authorized signatory who signs in the offer), if applicable, along with techno - commercial bid. This pact shall be considered as a preliminary qualification

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

for further participation. The names and other details of Independent External Monitor (IEM) for the subject tender is as given at point (xi) of 1 above.

- 15.0 The Bidder has to satisfy the Pre Qualifying Requirements stipulated for this Tender in order to be qualified. The Price Bids of only those bidders will be opened who will be qualified for the subject job on the basis of satisfying the Pre Qualification Criteria specified in this NIT as per Annexure-1 (as applicable), past performance etc. and date of opening of price bids shall be intimated to only such bidders. BHEL reserves the right not to consider offers of parties under HOLD.
- 16.0 In case BHEL decides on a 'Public Opening', the date & time of opening of the PRICE BID shall be intimated to the qualified bidders and in such a case, price bid (Volume-III) uploaded in E-procurement Site <https://eprocurebhel.co.in> will be opened.
- 17.0 Validity of the offer shall be for six months from the latest due date of offer submission (including extension, if any) unless specified otherwise.
- 18.0 BHEL shall be resorting to Reverse Auction (RA) (Guidelines as available on www.bhel.com) for this tender. RA shall be conducted among all the techno-commercially qualified bidders.
- Price bids of all techno-commercially qualified bidders shall be opened and same shall be considered as initial bids of bidders in RA. In case any bidder(s) do(es) not participate in online Reverse Auction, their sealed envelope price bid along with applicable loading, if any, shall be considered for ranking.
- 19.0 On submission of offer, further consideration will be subject to compliance to tender & qualifying requirement and customer's acceptance, as applicable.
- 20.0 In case the bidder is an "Indian Agent of Foreign Principals", 'Agency agreement has to be submitted along with Bid, detailing the role of the agent along with the terms of payment for agency commission in INR, along with supporting documents.
- 21.0 The bidders shall not enter into any undisclosed M.O.U. or any understanding amongst themselves with respect to tender.
- 22.0 Consortium Bidding (or Technical Tie up) shall be allowed only if specified in Pre Qualifying Requirement (PQR) criteria, and in such a case the details to be complied with is enclosed herewith as per Annexure-5 UNLESS SPECIFIED OTHERWISE IN PQR.
- 23.0 The bidder shall submit documents in support of possession of 'Qualifying Requirements' duly self certified and stamped/ digitally signed (as applicable) by the authorized signatory, indexed and properly linked in the format for PQR. In case BHEL requires any other documents/proofs, these shall be submitted immediately.
- 24.0 The bidder may have to produce original document for verification if so decided by BHEL.
- 25.0 The offers of the bidders who are on the banned list as also the offer of the bidders, who engage the services of the banned firms, shall be rejected. The list of banned firms is available on BHEL Website (www.bhel.com).

I) Integrity commitment, performance of the contract and punitive action thereof:

a) Commitment by BHEL:

BHEL commits to take all measures necessary to prevent corruption in connection with the tender process and execution of the contract. BHEL will during the tender process treat all Bidder(s) in a transparent and fair manner, and with equity.

b) Commitment by Bidder/ Supplier/ Contractor:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

b.i) The bidder/ supplier/ contractor commit to take all measures to prevent corruption and will not directly or indirectly influence any decision or benefit which he is not legally entitled to nor will act or omit in any manner which tantamount to an offence punishable under any provision of the Indian Penal Code, 1860 or any other law in force in India.

b.ii) The bidder/ supplier/ contractor will, when presenting his bid, disclose any and all payments he has made, and is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract and shall adhere to relevant guidelines issued from time to time by Govt. of India/ BHEL.

b.iii) The bidder/ supplier/ contractor will perform/ execute the contract as per the contract terms & conditions and will not default without any reasonable cause, which causes loss of business/ money/ reputation, to BHEL.

If any bidder/ supplier/ contractor during pre-tendering/ tendering/ post tendering/ award/ execution/ post-execution stage includes in mal-practices, cheating, bribery, fraud or and other misconduct or formation of cartel so as to influence the bidding process or influence the price or acts or omits in any manner which tantamount to an offence punishable under any provision of the Indian Penal code, 1860 or any other law in force in India, then, action may be taken against such bidder/ supplier/ contractor as per extant guidelines of the company available on www.bhel.com and/ or under applicable legal provisions.

- 26.0 Guidelines/rules in respect of Suspension of Business dealings, Vendor evaluation format, Quality, Safety & HSE guidelines, Experience Certificate, etc. may undergo change from time to time and the latest one shall be followed. The abridged version of extant 'Guidelines for suspension of business dealings with suppliers/ contractors' is available on www.bhel.com on "supplier registration page".
- 27.0 VOID.
- 28.0 The bidder along with its associates/collaborators/sub-contractors/sub-vendors/consultants/service providers shall strictly adhere to BHEL Fraud Prevention Policy displayed on BHEL website www.bhel.com and shall immediately bring to the notice of BHEL Management about any fraud or suspected fraud as soon as it comes to their notice.
- 29.0 Annexure-A -Amendment to GCC/SCC shall be read in conjunction with GCC-Volume-IB & SCC-Volume-ID. This Annexure-A (Amendment to GCC/SCC) of NIT shall not be considered as part of the NIT but addendum/corrigendum to the GCC/SCC only.
- 30.0 Annexure-B - Terms & conditions of Reverse Auction is enclosed herewith.
- 31.0 Annexure-D – Specific Clause w.r.t. BOCW Act & Cess Act is enclosed herewith.
- 32.0 Annexure-E- Statewise GST Registration nos. is enclosed herewith.
- 33.0 Duly filled & signed Annexure- CPP-GST/I to be submitted by bidders along with their techno-commercial offer.
- 34.0 Integrity Pact (IP) – NOT APPLICABLE FOR THIS TENDER.

(a) IP is a tool to ensure that activities and transactions between the Company and its Bidders/ Contractors are handled in a fair, transparent and corruption free manner. Following Independent External Monitors (IEMs) on the present panel have been appointed by BHEL with the approval of CVC to oversee implementation of IP in BHEL.

SI	IEM	Address	Email
1.	NOT APPLICABLE FOR THIS TENDER.		
2.			

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- (b) The IP as enclosed with the tender is to be submitted (duly signed by authorized signatory) along with techno-commercial bid (Part-I, in case of two/three part bid). Only those bidders who have entered into such an IP with BHEL would be competent to participate in the bidding. In other words, entering into this Pact would be a preliminary qualification.
- (c) Please refer Section-8 of IP for Role and Responsibilities of IEMs. In case of any complaint arising out of the tendering process, the matter may be referred to any of the above IEM(s). All correspondence with the IEMs shall be done through email only.

Note:

No routine correspondence shall be addressed to the IEM (phone/ post/ email) regarding the clarifications, time extensions or any other administrative queries, etc. on the tender issued. All such clarification/ issues shall be addressed directly to the tender issuing (procurement) department's officials whose contact details are provided below:

Details of contact person(s):

Name	Anish kumar/ Anupriya Mundu	Sandipan Biswas
Dept	SCT Dept, BHEL PSER, Kolkata	SCT Dept, BHEL PSER, Kolkata
Address	DJ-9/1, Sector – II, Salt Lake, Kolkata – 700091	DJ-9/1, Sector – II, Salt Lake, Kolkata – 700091
Phone	033-2339 8235/ 8236	033-2339 8226
Email	k.anish@bhel.in anupriya.mundu@bhel.in	bsandipan@bhel.in
FAX	033-2321 1960	033-2321 1960

- 35.0 For this procurement, the local content to categorize a supplier as a Class-I local supplier/ Class-II local supplier/ Non-Local supplier and purchase preference to Class-I local supplier, is as defined in Public Procurement (Preference to Make in India), Order 2017 dated 04-06-2020 issued by DPIIT. In case of subsequent orders issued by the Nodal Ministry, changing the definition of local content for the items of the NIT, the same shall be applicable even if issued after issue of this NIT, but before opening of Part-II bids against this NIT.

Duly filled & signed Form-1 (Format for local content), as applicable, to be submitted by bidders along with their techno-commercial offer.

- 36.0 Bidders are requested to submit their best price as per latest price schedule of the tender.
- 37.0 The consultant / firm (and any of its affiliates) shall not be eligible to participate in tender(s) for the related works or services for the same project, if they were engaged for the consultancy services.
- 38.0 It may please be noted that Bid should be free from correction, overwriting, using corrective fluid, etc. Any interlineation, cutting, erasure or overwriting shall be valid only if they are attested under full signature(s) of person(s) signing the bid, else bid shall be liable for rejection. All overwriting/ cutting, etc will be numbered by bid opening officials and announced during bid opening.
- 39.0 Compliance to Restrictions under Rule 144 (xi) of GFR 2017
- Any bidder from a country which shares a land border with India will be eligible to bid in this tender only if the bidder is registered with the Competent Authority. The Competent Authority for the purpose of this Clause shall be the Registration Committee constituted by the Department for Promotion of Industry and Internal Trade (DPIIT).
 - "Bidder" (including the term 'tenderer', 'consultant' or 'service provider' in certain contexts) means any person or firm or company, including any member of a consortium or joint venture (that is an association of several

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

persons, or firms or companies), every artificial juridical person not falling in any of the descriptions of bidders stated hereinbefore, including any agency branch or office controlled by such person, participating in a procurement process.

- III. "Bidder from a country which shares a land border with India" for the purpose of this Clause means: -
- An entity incorporated established or registered in such a country; or
 - A subsidiary of an entity incorporated established or registered in such a country; or
 - An entity substantially controlled through entities incorporated, established or registered in such a country; or
 - An entity whose beneficial owner is situated in such a country; or
 - An Indian (or other) agent of such an entity; or
 - A natural person who is a citizen of such a country; or
 - A consortium or joint venture where any member of the consortium or joint venture falls under any of the above
- IV. The beneficial owner for the purpose of (III) above will be as under:
- In case of a company or Limited Liability Partnership, the beneficial owner is the natural person(s), who, whether acting alone or together or through one or more juridical person, has a controlling ownership interest or who exercises control through other means.
- Explanation
- "Controlling ownership interest" means ownership of or entitlement to more than twenty-five per cent of shares or capital or profits of the company.
 - "Control" shall include the right to appoint majority of the directors or to control the management or policy decisions including by virtue of their shareholding or management rights or shareholders agreements or voting agreements.
- In case of a partnership firm, the beneficial owner is the natural person(s) who, whether acting alone or together, or through one or more juridical person, has ownership of entitlement to more than fifteen percent of capital or profits of the partnership.
 - In case of an unincorporated association or body of individuals, the beneficial owner is the natural person(s), who, whether acting alone or together, or through one or more juridical person has ownership of or entitlement to more than fifteen percent of the property or capital or profits of the such association or body of individuals.
 - Where no natural person is identified under (1) or (2) or (3) above, the beneficial owner is the relevant natural person who holds the position of senior managing official;
 - In case of a trust, the identification of beneficial owner(s) shall include identification of the author of the trust, the trustee, the beneficiaries with fifteen percent or more interest in the trust and any other natural person exercising ultimate effective control over the trust through a chain of control or ownership.
- V. An Agent is a person employed to do any act for another, or to represent another in dealings with third person.
- VI. The successful bidder shall not be allowed to sub-contract works to any contractor from a country which shares a land border with India unless such contractor is registered with the Competent Authority.

Note:

- The bidder shall provide undertaking for their compliance to this Clause, in the Format provided in Form-3.
- Registration of the bidder with Competent Authority should be valid at the time of submission as well as acceptance of the bids.

- 40.0 In the course of evaluation, if more than one bidder happens to occupy L-1 status, effective L-1 will be decided by soliciting discounts from the respective L-1 bidders.

In case more than one bidder happens to occupy the L-1 status even after soliciting discounts, the L-1 bidder shall be decided by a toss/ draw of lots, in the presence of the respective L-1 bidder(s) or their representative(s).

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Ranking will be done accordingly. BHEL's decision in such situations shall be final and binding.

41.0 GeMAR and PTS ID: GEM/GARPTS/10022021/EHZA4R9G5W74.

42.0 The Bidder declares that they will not enter into any illegal or undisclosed agreement or understanding, whether formal or informal with other Bidder(s). This applies in particular to prices, specifications, certifications, subsidiary contracts, submission or non-submission of bids or any other actions to restrict competitiveness or to introduce cartelization in the bidding process.

In case, the Bidder is found having indulged in above activities, suitable action shall be taken by BHEL as per extant policies/ guidelines.

Format attached (Annexure-6-Declaration reg. Related Firms & their areas of Activities).

43.0 Order of Precedence

In the event of any ambiguity or conflict between the Tender Documents, the order of precedence shall be in the order below:

- Amendments/Clarifications/Corrigenda/Errata etc issued in respect of the tender documents by BHEL
- Notice Inviting Tender (NIT)
- Price Bid-Volume-III
- Technical Conditions of Contract (TCC) -- Volume-IF
- Special Conditions of Contract (SCC) —Volume-ID
- General Conditions of Contract (GCC) —Volume-IB
- Forms and Procedures —Volume-IE

It may please be noted that guidelines/ circulars/ amendments/ govt. directives issued from time to time shall also be applicable.

for BHARAT HEAVY ELECTRICALS LTD

Dy Mgr (SCT)

Agency	Contact details	
BHEL, PSER, Kolkata	Address	DJ-9/1, Sector – II, Salt Lake, Kolkata – 700 091
	Phone no	033-2339 8235/ 8235/ 8000
	FAX no	033-23211960
	E-mail	k.anish@bhel.in / anupriya.mundu@bhel.in / bsandipan@bhel.in

Enclosure

- Annexure-1: Pre Qualification Criteria.
- Format-1 & Format-2/PQ Explanatory Note
- Annexure-2: Format for No Deviation Certificate.
- Annexure-3: Format for seeking clarification.
- Annexure-4: Check List.
- Annexure-5: Conditions for consortium/tie up.
- Annexure-6-Declaration reg. Related Firms & their areas of Activities
- Annexure –A- Amendment to GCC/SCC.
- Annexure -B- Terms & conditions of Reverse Auction.
- Annexure –C- CA certificate Format.
- Annexure-D – Specific Clause w.r.t. BOCW Act & Cess Act.
- Annexure-E- Statewise GST Registration nos.
- Annexure-F- Bankruptcy/ Liquidation Undertaking
- Annexure– CPP-GST/I.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

15. Form-2 (Format for local content)
16. Form-3
17. Other Tender documents as per this NIT.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE-1PRE QUALIFICATION CRITERIA

JOB	Receipt, unloading, storage, Material Handling, Dismantling, material movement, New Material Erection, Re-Erection of Old Items, Modification of existing Items, Restoration, Commissioning, Testing & PG Test etc. of Combustion modification system for NOx mitigation of DVC Raghunathpur TPS(2x600 MW) U#1,2, PURULIA, West Bengal.
TENDER NO	PSER:SCT:RGN-S2098:21.

SL NO	CRITERIA
	FINANCIAL
1.0(a)	BIDDER SHOULD HAVE AVERAGE ANNUAL TURNOVER OF MINIMUM Rs 57.70 LAKHS DURING THREE CONSECUTIVE FINANCIAL YEARS 2017-18, 2018-19 AND 2019-20 AND SHOULD HAVE POSITIVE NET WORTH AS ON LATEST AUDITED ACCOUNTS AS SUBMITTED FOR PARA 1(c).
(b)	BIDDER MUST HAVE EARNED PROFIT IN ANY ONE OF THE THREE CONSECUTIVE FINANCIAL YEARS 2017-18, 2018-19 AND 2019-20. AUDITED BALANCE SHEET AND PROFIT & LOSS ACCOUNT OF THE COMPANY FOR THE ABOVE MENTIONED FINANCIAL YEARS, NEED TO BE SUBMITTED IN SUPPORT OF ABOVE.
(c)	IN CASE AUDITED BALANCE SHEET AND PROFIT & LOSS ACCOUNT HAS NOT BEEN SUBMITTED FOR ALL THREE YEARS INDICATED ABOVE THEN APPLICABLE FINANCIAL AUDITED STATEMENTS SUBMITTED BY THE BIDDER AGAINST THE REQUISITE THREE YEARS WILL BE AVERAGED FOR THREE YEARS.
(d)	IF FINANCIAL STATEMENTS ARE NOT REQUIRED TO BE AUDITED STATUTORILY, THEN INSTEAD OF AUDITED FINANCIAL STATEMENTS, FINANCIAL STATEMENTS ARE REQUIRED TO BE CERTIFIED BY CHARTERED ACCOUNTANT.
	TECHNICAL
2.0	BIDDER SHOULD HAVE EXECUTED FOLLOWING WORKS DURING LAST 7 (SEVEN) YEARS, ENDING ON LATEST DUE DATE OF OFFER SUBMISSION. RELEVANT SUPPORTING DOCUMENT SHALL BE SUBMITTED.
2.1	ERECTION & COMMISSIONING OF AT LEAST ONE BOILER (CONSISTING OF "PRESSURE PARTS" / "STRUCTURE") OF AN UNIT OF RATING ≥ 190 MW
	OR
2.2	RENOVATION & MODERNIZATION OF AT LEAST ONE BOILER (CONSISTING OF PRESSURE PARTS) OF AN UNIT OF RATING ≥ 190 MW
	OR
2.3	ONE OVERHAULING JOB OF (BOILER PRESSURE PARTS AND 'STRUCTURE/NON PRESSURE PARTS/ESP/ROTARY MACHINES/INSULATION/ PIPING/AUXILIARIES/DUCTING / ANY COMBINATION OF THESE PARTS') OF AN UNIT OF RATING ≥ 190 MW
	NOTE FOR SL NO 2.0 ABOVE
	THE WORD EXECUTED MEANS: THE WORK SHALL HAVE BEEN COMPLETED UPTO LIGHT UP OF BOILER EVEN IF THE CONTRACT HAS NOT BEEN COMPLETED OR CLOSED.
3.0	BIDDER SHOULD HAVE "VALID CERTIFICATE OF RECOGNITION AS BOILER REPAIRER / ERECTOR WITH PRESSURE RATING CATEGORY CLASS-I OR ABOVE" FROM THE DIRECTOR OF BOILERS. RELEVANT SUPPORTING DOCUMENT SHALL BE SUBMITTED.
4.0	BIDDER SHOULD HAVE VALID PAN RELEVANT SUPPORTING DOCUMENTS SHALL BE SUBMITTED.
5.0	NO CONSORTIUM / JV BIDDING IS ALLOWED FOR THIS TENDER.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

NOTE	
A	BIDDER SHALL SUBMIT ABOVE PRE-QUALIFICATION CRITERIA FORMAT, DULY FILLED-IN, SPECIFYING RESPECTIVE ANNEXURE NUMBER AGAINST EACH CRITERIA AND FURNISH RELEVANT DOCUMENT IN THE RESPECTIVE ANNEXURES IN THEIR OFFER.
B	ONE MW IS EQUIVALENT TO 3.5 TPH WHERE EVER RATING OF BOILER IS MENTIONED IN TPH, FOR THE PURPOSE OF EVALUATION OF PQR.
C	BIDDER MUST NOT BE UNDER BANKRUPTCY CODE PROCEEDINGS (IBC) BY NCLT OR UNDER LIQUIDATION / BIFR, WHICH WILL RENDER HIM INELIGIBLE FOR PARTICIPATION IN THIS TENDER, AND SHALL SUBMIT UNDERTAKING TO THIS EFFECT.
D	CONSIDERATION OF OFFER WILL BE SUBJECT TO CUSTOMER'S APPROVAL OF BIDDER.
E	AFTER SATISFACTORY FULFILLMENT OF ALL THE ABOVE CRITERIA, OFFER SHALL BE CONSIDERED FOR FURTHER EVALUATION AS PER NIT AND ALL OTHER TERMS OF THE TENDER.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Explanatory Notes for the PQR (unless otherwise specified in the PQR):

1. Bidder to submit Audited Balance Sheet and Profit and Loss Account for the respective years as indicated along with all annexures.
2. In case audited Financial statements have not been submitted for all the three years as indicated, then the applicable audited statements submitted by the bidders against the requisite three years, will be averaged for three years i.e total divided by three.
3. Net Worth (Only in case of companies) of the bidder should be positive. Net worth shall be calculated based on the latest Audited Accounts as furnished. Net worth = Paid up share capital + Reserves.
4. PROFIT shall be PBT earned during any one year of last three financial years.
5. 'Additional' Criteria in respect of 'Technical' criteria of PQR for Civil, Electrical, CI, unless otherwise specified:
 - i) 'Similar' work means
 - a. Piling or Civil or Structure or 'Civil and Structural works' or RCC Chimney or RCC Cooling Tower or RCC Silo or Mill Bunker or any combination of these shall be considered similar works for all packages mentioned under 'CIVIL WORKS'
 - b. Electrical or C&I or 'Electrical and C&I' shall be considered similar works for all packages mentioned under 'ELECTRICAL AND C&I WORKS'
6. For evaluation of PQR of Civil, Electrical and C&I packages, in case Bidder alone does not meet the 'Additional' pre-qualifying technical criteria, bidder may utilize the experience of its Parent/ Subsidiary Company along with its own experience, subject to following:
 - a. The parent company shall have a controlling stake of $\geq 50\%$ in the subsidiary company (as per Format-1).
 - b. The Parent Company/ Subsidiary Company of which experience is being utilized for bidding shall submit Security Deposit(SD) equivalent to 1% of the total contract value.
 - c. The parent/ subsidiary company and bidder shall provide an undertaking that they are jointly or severally responsible for successful performance of the contract (as per Format-2).
 - d. In case Bidder is submitting bid as a Consortium Partner, option of utilizing experience of parent/subsidiary Company can be availed by Prime Bidder only.
 - e. Parent Company/ Subsidiary Company of which experience is being used for bidding, cannot participate as a 'Standalone Bidder' or as a 'Consortium bidder'.
7. Completion date for achievement of the technical criteria specified in the Common QR should be in the last 7 years ending on the 'latest date of Bid Submission' of Tender irrespective of date of the start of work.
8. 'EXECUTED' means the bidder should have achieved the criteria specified in the Technical criteria of PQR even if the Contract has not been completed or closed
9. In case the Experience/PO/WO certificate enclosed by bidders do not have separate break up of prices for the E&C portion for Electrical and C&I works (i.e. the certificates enclosed are for composite order for supply and erection of Electrical and C&I and other works if any), then value of Erection & Commissioning for the Electrical and C&I portion shall be considered as 15% of the price for supply & erection of Electrical and C&I.
10. Unless otherwise specified, for the purpose of "Technical Criteria" of PQR, the word 'EXECUTED' means achievement of milestones as defined below -
 - "ACHIEVEMENT OF PHYSICAL QUANTITIES" as per PQRs.
 - "READINESS FOR COAL FILLING" of at least one Bunker, in respect of Mill Bunker Structure.
 - "CHARGING" in respect of Power Transformers/ Bus Ducts/ "HT/LT Switchgears" / "HT/LT Cabling".
 - For C&I works: "SYNCHRONISATION" in case of power project / "WORK EXECUTION" of the value as defined in PQR in case of industry.
 - "BOILER LIGHT UP" in respect of Boiler / CFBC / ESP.
 - "CHARGING OF ATLEAST ONE PASS" in respect of ESP(R&M)
 - "GAS IN" in respect of HRSG.
 - "STEAM BLOWING" in respect of Power Cycle Piping.
 - "HYDRAULIC TEST"/ ANY OTHER EQUIVALENT TEST LIKE "100% RT/UT OF WELDED JOINTS" of the system in respect of Pressure parts/ LP Piping/CW Piping.
 - "FULL LOAD OPERATION OF THE UNIT" in respect of Insulation work.
 - "SYNCHRONISATION" in respect of STG / GTG.
 - "SPINNING" in respect of HTG.
 - "GAS IN" in respect of FGD
11. Boiler means HRSG or WHRB or any other types of Steam Generator

12. Power Cycle piping means Main Steam, Hot Reheat, Cold Reheat, HP Bypass
13. For the purpose of evaluation of the PQR, one MW shall be considered equivalent to 3.5 TPH where ever rating of HRSG/BOILER is mentioned in MW. Similarly, where ever rating of Gas Turbine is mentioned in terms of Frame size, ISO rating of the same in terms of MW shall be considered for evaluation.
14. Value of work is to be updated with indices for "All India Avg. Consumer Price index for industrial workers" and "Monthly Whole Sale Price Index for All Commodities" with base month as per last month of work execution and indexed up to three (3) months prior to the month of latest due date of bid submission as per following formula-

$$P = R + 0.425 \times R \times \frac{(X_N - X_0)}{X_0} + 0.425 \times R \times \frac{(Y_N - Y_0)}{Y_0}$$

Where

P = Updated value of work

R = Value of executed work

X_N = All India Avg. Consumer Price index for industrial workers for three months prior to the month of latest due date of bid submission (e.g. If latest bid submission date is 02-Mar-17, then bid submission month shall be reckoned as March'17 and index for Dec'2016 shall be considered).

X_0 = All India Avg. Consumer Price index for industrial workers for last month of work execution

Y_N = Monthly Whole Sale Price Index for All Commodities for three months prior to the month of latest due date of bid submission (e.g. If latest bid submission date is 02-Mar-17, then bid submission month shall be reckoned as March'17 and index for Dec'2016 shall be considered).

Y_0 = Monthly Whole Sale Price Index for All Commodities for last month of work execution

15. Bidder must not be under Bankruptcy Code Proceedings (IBC) by NCLT or under Liquidation / BIFR, which will render him ineligible for participation in this tender, and shall submit undertaking to this effect.
16. Credentials submitted by the bidder against "PRE QUALIFYING CRITERIAS" shall be verified for its authenticity. In case, any credential (s) is/are found unauthentic, offer of the bidder is liable to the rejection. BHEL reserves the right to initiate any further action as per extant guidelines for Suspension of Business Dealings.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Format-1 /PQ Explanatory Note

Certificate for relationship between Parent Company / Subsidiary Company and the bidder

To,

.....

.....

Dear Sir,

Sub: Bid for NIT No dated..... for “.....” (name of the tender).

We hereby certify that M/s..... is Parent Company/ Subsidiary Company of M/s(the bidder) and details of equity holding of the Parent Company in Subsidiary Company as on(not earlier than seven days prior to the Bid Submission Date) are given as below:

Name of Parent Company	Name of Subsidiary Company	Percentage of Equity Holding of Parent Company in Subsidiary Company

(Insert Name and Signature of Statutory Auditor or practicing Company Secretary of the Bidder)

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Format-2 /PQ Explanatory Note

Undertaking from the Parent Company/ Subsidiary Company of the bidder
(On the Letter Head of Parent Company/ Subsidiary Company, as applicable)

From,
Name:
Full Address:

Telephone No.:
E-mail address:
Fax/No.:

To,
.....
.....

Dear Sir,

We refer to the NIT No dated..... for “.....” (name of the Tender).

“We have carefully read and examined in detail the NIT/Tender Terms and Conditions, including in particular, Clause of the NIT/Tender, regarding submission of an Undertaking, as per the prescribed Format 1 of the NIT/ Tender.

We confirm that M/s..... (the Bidder) has been authorized by us to use our Technical capability for meeting the Technical Criteria as specified in Clause.....of the PQR of the NIT/Tender referred above.

We agree to submit the Security Deposit equivalent to 1% of the total contract value in addition to Security Deposit to be submitted by Bidder as per Clause.....of the NIT/Tender for fulfillment of all obligations in terms of provisions of the contract, in the event of(the Bidder) being selected as the Successful Bidder.

We confirm that we along with M/s.....(the bidder), are jointly or severally responsible for successful performance of the contract.

We confirm that our company shall not participate in the above tender as a ‘Standalone Bidder’ or as a ‘Consortium bidder’ and also shall not authorize any other bidder to use our Technical capability for the above tender.

All the terms used herein but not defined, shall have the meaning as ascribed to the said terms under the referred NIT/Tender.

Signature of Managing Director/Authorized signatory of Parent/ Subsidiary Company

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE - 2**FORMAT FOR NO DEVIATION CERTIFICATE**
(To be submitted in the bidder's letter head)

BHARAT HEAVY ELECTRICALS LIMITED,
Power Sector - Eastern Region,
Plot no 9/1, DJ Block, Sector – II, Salt Lake City,
Kolkata – 700 091

Sub	No Deviation Certificate.	
Job	Receipt, unloading, storage, Material Handling, Dismantling, material movement, New Material Erection, Re-Erection of Old Items, Modification of existing Items, Restoration, Commissioning, Testing & PG Test etc. of Combustion modification system for NOx mitigation of DVC Raghunathpur TPS(2x600 MW) U#1,2, PURULIA, West Bengal.	
Ref	1.0	Tender no PSER:SCT:RGN-S2098:21.
	2.0	BHEL's NIT, vide reference no PSER:SCT:RGN-S2098:8476 Date: 20-02-2021.
	3.0	All other pertinent issues till date.

Dear Sirs,

With reference to above, this is to confirm that as per tender conditions, we have visited site before submission of our offer and noted the job content & site conditions etc. We also confirm that we have not changed/ modified the tender documents as appeared in the website/ issued by you and in case of such observance at any stage, it shall be treated as null and void.

We hereby confirm that we have not taken any deviation from tender clauses together with other references as enumerated in the above referred NIT. We hereby confirm our unqualified acceptance to all terms & conditions, unqualified compliance to technical specification, integrity pact (if applicable) and acceptance to reverse auctioning process.

In the event of observance of any deviation in any part of our offer at a later date whether implicit or explicit, the deviations shall stand null & void.

We confirm to have submitted/uploaded offer/documents in accordance with tender instructions with acceptance of the terms & conditions of the tender by us and as per aforesaid references.

Thanking you,

Yours faithfully,

(Signature, date & seal of authorized
representative of the bidder)

ANNEXURE - 3**FORMAT FOR SEEKING CLARIFICATION**

JOB	Receipt, unloading, storage, Material Handling, Dismantling, material movement, New Material Erection, Re-Erection of Old Items, Modification of existing Items, Restoration, Commissioning, Testing & PG Test etc. of Combustion modification system for NOx mitigation of DVC Raghunathpur TPS(2x600 MW) U#1,2, PURULIA, West Bengal.
TENDER NO	PSER:SCT:RGN-S2098:21

Sl no	Reference clause of tender document	Existing provision	Bidder's query	BHEL's clarification

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE - 4**CHECK LIST**

NOTE:- Tenderers are required to fill in the following details and no column should be left blank

1	Name and Address of the Tenderer		
2	Details about type of the Firm/Company		
3.a	Details of Contact person for this Tender	Name : Mr/Ms Designation: Telephone No: Mobile No: Email ID: Fax No:	
3.b	Details of alternate Contact person for this Tender	Name : Mr/Ms Designation: Telephone No: Mobile No: Email ID: Fax No:	
4	EMD DETAILS	DD No: Date : Bank : Amount: Please tick (√) whichever applicable:- ONE TIME EMD / ONLY FOR THIS TENDER	
5	Validity of Offer	TO BE VALID FOR SIX MONTHS FROM DUE DATE	
		APPLICABILITY(BY BHEL)	ENCLOSED BY BIDDER
6	Whether the format for compliance with PRE QUALIFICATION CRITERIA (ANNEXURE-I) is understood and filled with proper supporting documents referenced in the specified format	Applicable	YES / NO
7	Audited profit and Loss Account for the last three years	Applicable/Not Applicable	YES/NO
8	Copy of PAN Card	Applicable/Not Applicable	YES/NO
9	Whether all pages of the Tender documents including annexures, appendices etc are read understood and signed	Applicable/Not Applicable	YES/NO
10	Integrity Pact	Applicable/Not Applicable	YES/NO
11	Declaration by Authorised Signatory	Applicable/Not Applicable	YES/NO
12	No Deviation Certificate	Applicable/Not Applicable	YES/NO
13	Declaration confirming knowledge about Site Conditions	Applicable/Not Applicable	YES/NO
14	Declaration for relation in BHEL	Applicable/Not Applicable	YES/NO
15	Non Disclosure Certificate	Applicable/Not Applicable	YES/NO
16	Bank Account Details for E-Payment	Applicable/Not Applicable	YES/NO
17	Capacity Evaluation of Bidder for current Tender	Applicable/Not Applicable	YES/NO
18	Tie Ups/Consortium Agreement are submitted as per format	Applicable/Not Applicable	YES/NO
19	Power of Attorney for Submission of Tender/Signing Contract Agreement	Applicable/Not Applicable	YES/NO
20	Analysis of Unit rates	Applicable/Not Applicable	YES/NO

NOTE: STRIKE OFF 'YES' OR 'NO', AS APPLICABLE. TENDER NOT ACCOMPANIED BY THE PRESCRIBED ABOVE APPLICABLE DOCUMENTS ARE LIABLE TO BE SUMMARILY REJECTED.

DATE :

AUTHORISED SIGNATORY
(With Name, Designation and Company seal)

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE-5CONDITIONS TO BE COMPLIED WITH FOR CONSORTIUM BIDDING (TECHNICAL TIE UP)

- 1 Prime Bidder and Consortium Partner or partners are required to enter into a consortium agreement with a validity period of six months initially. In case the consortium is awarded the contract, then the Consortium Agreement between the Prime Bidder and Consortium Partner or partners shall be extended till contractual completion period including extension periods if any applicable. The Prime Bidder and Consortium Partner(s) shall certify to BHEL regarding existence and validity of their consortium agreement on six monthly basis.
- 2 Standalone' bidder cannot become a 'Prime Bidder' or a 'Consortium bidder' or 'Technical Tie up bidder' in a consortium (or Technical Tie up) bidding. Prime bidder shall neither be a consortium partner to other prime bidder nor take any other consortium partners. However, consortium partner may enter into consortium agreement with other prime bidders. In case of non compliance, consortium bids of such Prime bidders will be rejected.
- 3 Number of partners for a consortium Bidding (or Technical Tie up) shall be as specified in the PQR.
- 4 Prime Bidder shall be as specified in the Pre Qualification Requirement, else the bidder who has the major share of work.
- 5 In order to be qualified for the tender, Prime Bidder and Consortium partner or partners shall satisfy (i) the Technical 'Pre Qualifying Requirements' specified for the respective package, (ii) "Assessment of Capacity of Bidder" as specified in clause 8.0
- 6 Prime Bidder shall comply with additional 'Technical' criteria of PQR as defined in 'Explanatory Notes for the PQR'
- 7 Prime Bidder shall comply with all other Pre Qualifying criteria for the Tender unless otherwise specified
- 8 In case customer approval is required, then Prime Bidder and Consortium Partner or partners shall have to be individually approved by Customer for being considered for the tender.
- 9 Prime Bidder shall be responsible for the overall execution of the contract
- 10 In case of award of job, Performance shall be evaluated for Prime Bidder and Consortium Partner or partners for their respective scope of work(s) as per prescribed formats.
- 11 In case the Consortium partner or partners back out, their SDs shall be encashed by BHEL. In such a case, other consortium partner or partners meeting the PQR have to be engaged by the Prime Bidder, and if not, the respective work will be withdrawn and executed on risk and cost basis of the Prime Bidder. The new consortium partner or partners shall submit fresh SDs as applicable.
- 12 In case the prime Bidder withdraws, the whole contract shall be considered cancelled and short closed.
- 13 After successful execution of one work with a consortium partner under direct orders of BHEL, the Prime Bidder shall be eligible for becoming a 'standalone' bidder for works similar to that for which consortium partner was engaged, for subsequent tenders.
- 14 The consortium partner shall submit SD equivalent to 1% of the total contract value in addition to the SD to be submitted by the prime Bidder for the total contract value. In case there are two consortium partners, then each partner shall submit SD equivalent to 0.5% of the total contract value in addition to the SD to be submitted by the prime Bidder for the total contract value.
- 15 In case of a Technical Tie up, all the clauses applicable for the Consortium partner shall be applicable for the Technical Tie up partner also.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE-6**DECLARATION**

Date: _____

To: _____
Address: BHEL, _____

email: _____

Sub: Details of related firms and their area of activities

Dear Sir/ Madam,

Please find below details of firms owned by our family members that are doing business/ registered for same item with BHEL, _____ (NA, if not applicable)

1	Material Category/ Work Description	
	Name of Firm	
	Address of Firm	
	Nature of Business	
	Name of Family Member	
	Relationship	
2	Material Category/ Work Description	
	Name of Firm	
	Address of Firm	
	Nature of Business	
	Name of Family Member	
	Relationship	
...		

Note: I certify that the above information is true and I agree for penal action from BHEL in case any of the above information furnished is found to be false.

Regards,

(_____)

From: M/s _____
 Supplier Code: _____
 Address: _____

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure - AAmendment to GCC/SCC

1. Introduction of Clause No 1.15.13 in GCC as below:

Clause No 1.15.13: Additional security deposit (SD) has to be submitted by the successful bidder with value as follows:

“If the final price of successful bidder is lesser by ‘more than 20%’ of BHEL’s estimate - ‘Additional Security Deposit’ will be required to be submitted by the successful bidder with value as follows:

Additional Security Deposit = 30 % of (A-B) limited to a maximum of 10% of the ‘Total Price/Contract Value’, where,

A = 80% of BHEL estimate

B = The final offered price of successful bidder through RA (In case of RA)

OR

Sealed paper price bid of successful bidder (in case of paper bid)

This ‘Additional Security Deposit’ shall have the same validity as that of the ‘Security Deposit’ and shall be revalidated/released in the manner as spelt out for the ‘Security Deposit’ as per relevant clause of GCC.

The BHEL’s estimated value shall be disclosed to the successful bidder (on their request) at appropriate juncture in case ‘Additional Security Deposit’ is applicable.”

2. Clause no. 1.9.1(ii) of GCC shall be read as below:

The EMD may be accepted only in the following forms:

(a) Cash deposit as permissible under the extant Income Tax Act (before tender opening)

(b) Electronic Fund Transfer credited in BHEL account (before tender opening)

(c) Banker’s cheque/ Pay order/ Demand draft, in favour of BHEL (along with offer)

(d) Fixed Deposit Receipt (FDR) issued by Scheduled Banks/ Public Financial Institutions as defined in the Companies Act (FDR should be in the name of the Contractor, a/c BHEL).

In addition to above, the EMD amount in excess of Rs. 2 Lakh may also be accepted in the form of Bank Guarantee from scheduled bank. The Bank Guarantee in such cases shall be valid for at least six months. EMD of successful tenderer will be retained as part of Security Deposit.

Clause no. 1.9.1(iv) & (v) of GCC stands deleted.

3. Clause no. 1.10.1 of GCC shall be read as below:

The total amount of Security Deposit will be 5% of the contract value. EMD of the successful tenderer shall be converted and adjusted towards the required amount of Security Deposit.

4. Clause no. 1.10.2 of GCC shall be read as below:

At least 50% of the required Security Deposit, including the EMD, should be furnished before start of the work. Balance of the Security Deposit can be deposited by deducting 10% of the gross amount progressively

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

from each of the running bills of the Contractor till the total amount of the required Security Deposit is collected.

The recoveries made from running bills (cash deduction towards balance SD amount) can be released against submission of equivalent Bank Guarantee in acceptable form, but only once, before completion of work, with the approval of competent authorities.

5. Clause no. 1.10.3 of GCC shall be read as below:

The balance amount to make up the required Security Deposit of 5% of the contract value may be accepted in the following forms:

- a) Cash (as permissible under the extant Income Tax Act)
- b) Local cheques of Scheduled Banks (subject to realization)/ Pay Order/ Demand Draft/ Electronic Fund Transfer in favour of BHEL
- c) Bank Guarantee from Scheduled Banks/ Public Financial Institutions as defined in the Companies Act. The Bank Guarantee format should have the approval of BHEL
- d) Fixed Deposit Receipt issued by Scheduled Banks/ Public Financial Institutions as defined in the Companies Act (FDR should be in the name of the Contractor, a/c BHEL)
- e) Securities available from Indian Post offices such as National Savings Certificates, Kisan Vikas Patras etc. (held in the name of Contractor furnishing the security and duly endorsed/ hypothecated/ pledged, as applicable, in favour of BHEL)

(Note: BHEL will not be liable or responsible in any manner for the collection of interest or renewal of the documents or in any other matter connected therewith)

6. Introduction of Clause No. 1.10.8 in GCC as below:

Clause No 1.10.8: SDBG to be furnished by the vendor before start of work. No payment will be released till SDBG is submitted by the vendor.

If requested by the vendor, cash recovery equivalent to SDBG value to be made from bills submitted by the vendor.

Also recovery of interest calculated @SBI PLR +2% on amount equivalent to SDBG / PBG value to be made for the gap period (difference between date of start of work and date of submission of BG / cash recovery).

In case of delay in extension of SDBG, in case of validity expiry, SDBG shall be invoked. However if the vendor submits a new BG after invocation of the previous BG then, it shall be refunded and recovery for the gap period, i.e. the duration for which BG is not available shall be made as stated above.

7. Clause no. 1.11 of GCC shall be read as below:

Security Deposit shall be refunded/Bank Guarantee(s) released to the Contractor along with the 'Final Bill' after deducting all expenses / other amounts due to BHEL under the contract / other contracts entered into with them by BHEL upon fulfilment of contractual obligations as per terms of the contract.

8. Introduction of the following paragraph in clause no. 2.7.1 under clause no. 2.7 "Rights of BHEL" of GCC:

"In case of inadequate manpower deployed by the contractor, BHEL reserves the right to deploy additional manpower through any other agency for expediting activities in the interest of the project. Supplied manpower shall be put on job by the contractor and payments and other statutory compliances related to manpower shall be the contractor's responsibility. In case of contractor's failure to fulfill his obligations in respect of such manpower, BHEL reserves the right to take necessary action as per contract conditions."

9. Clause no. 2.8.3, 2.8.4 and 2.8.5 of GCC shall be read as below:

Clause no. 2.8.3: The contractor shall comply with all applicable State and Central Laws, Statutory Rules, Regulations, Notifications, etc. such as Payment of Wages Act, Minimum Wages Act,

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Workmen Compensation Act, Employer's Liability Act, Industrial Disputes Act, Employers Provident Act, Employees State Insurance Scheme, Contract Labour (Regulation and Abolition) Act, 1970, Payment of Bonus & Gratuity Act, Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996, The Building and Other Construction Workers' Welfare Cess Act, 1996 and other Acts, Rules, and Regulations for labour/workers as applicable and as may be enacted by the State Government and Central Govt. during the tenure of the Contract and having force or jurisdiction at Site. The Contractor shall also comply with provisions of and give all such notices to the local Governing Body, Police and other relevant Authorities as may be required by the Law.

Clause no. 2.8.4: The Contractor shall obtain independent License under the Contract Labour (Regulations and Abolition) Act, 1970 for engaging contract labour as required from the concerned Authorities based on the certificate (Form- V) issued by the Principal Employer/Customer.

Clause no. 2.8.5: The contractor shall pay and bear all taxes, fees, license charges, Cess, duties, deposits, tolls, royalties, commission or other charges which may be leviable on account of his operations in executing the contract.

10. Clause 2.12 of GCC (Overrun Compensation)

2.12 OVERRUN COMPENSATION (ORC)

2.12.1 ORC during original contract period: No ORC shall be applicable during the original contract period.

2.12.2 ORC during extended period for the reasons solely attributable to contractor: No ORC shall be applicable during the extended period granted for the reasons solely attributable to contractor and work executed during this period shall be paid as per original contract rates.

2.12.3 ORC during extended period for the reasons not attributable to contractor: ORC shall be payable as per following procedure:

2.12.3.1 For initial period of twelve months of extended period, ORC rate applicable over executed value shall be 5%. For every subsequent period of twelve months, ORC rate shall be further increased by 5% over the previous rate. For example, ORC rates applicable for initial period of 12 months and subsequent period of 12 months are given below.

Sl. No.	Extended Period for the reasons attributable to BHEL	ORC rate applicable over executed value
1	First 12 months	5%
2	13th-24th month and so on	10.25% $\{[(1.05 \times 1.05) - 1] \times 100\}$

This process of increasing ORC rate for each subsequent period of 12 months shall continue till applicability of ORC.

2.12.3.2 On completion of original contract period as well as on completion of each subsequent period of twelve months i.e. at the time of change in applicable ORC rate, Delay Analysis shall be carried out and percentage shortfall attributable to both BHEL & Contractor shall be calculated.

2.12.3.3 For the purpose of calculation of ORC, executed value of work in the month shall be divided in Part-1 and Part-2 in proportion of percentage shortfall attributable to BHEL and contractor respectively, based on the last delay analysis as worked out in 2.12.3.2.

ORC shall be payable only on Part-1 and no ORC shall be payable on Part-2.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Value of Part-1 shall be further limited to the value of actual inputs provided by BHEL i.e. "Plan - Shortfall attributable to BHEL" for the month, as per Form-14 for calculation of ORC.

2.12.3.4 Payment of ORC amount shall be further regulated as follows:

- (i) 50% of the ORC is allocated for deployment of matching resources (with weightages) agreed as per the joint programme drawn vide 2.11.4. ORC Payment against resources shall be calculated in proportion to percentage of resources actually deployed w.r.t. planned resources, as per Form-14.
- (ii) 50% of ORC is allocated for achieving of planned progress agreed as per the joint programme drawn vide 2.11.4. ORC Payment shall be reduced in proportion to percentage shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month, as per Form-14.

2.12.3.5 The maximum amount of ORC payable for the month shall be limited to Rs. 5,00,000/-.

2.12.3.6 In case, there is no shortfall attributable to contractor for the month and also contractor has deployed the resources as agreed in Form-14 but ORC amount payable for the month worked out as per procedure mentioned in clause 2.12.3.3, 2.12.3.4 and 2.12.3.5, is less than Rs.1,00,000/-, then ORC amount payable for the month shall be Rs.1,00,000/- otherwise ORC amount payable for the month shall remain same.

2.12.3.7 In case execution is on HOLD (Other than Force Majeure), ORC shall be payable as per following:

- i). Contractor has not been permitted by BHEL to de-mobilize
 - a) ORC amount of Rs. 1,00,000/- per month shall be applicable during the period of HOLD provided resources as planned are deployed (not demobilised) during the period of hold.
 - b) Subsequent to lifting of HOLD, Period of HOLD shall not be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.
- ii). Contractor has been permitted to demobilize and to remobilize after lifting of HOLD
 - a) No ORC shall be payable to contractor for the period of HOLD.
 - b) Subsequent to lifting of HOLD, Period of HOLD shall not be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.

2.12.3.8 In case Force Majeure is invoked:

- (i) No ORC shall be applicable during the period of Force Majeure.
- (ii) Subsequent to revocation of Force Majeure, period of Force Majeure shall be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.

2.12.4 Applicability of ORC: ORC shall not be applicable for following activities.

- (i) Area cleaning, removal of temporary structures and return of scrap.
- (ii) Punch list points / pending points liquidation pending due to reasons attributable to contractor
- (iii) Submission of "As built Drawing"
- (iv) Material Reconciliation
- (v) Completion of Contract Closure formalities like HR Clearance/ No dues from various dept./ Statutory Authorities etc.

2.12.5 Total Over Run Compensation shall be limited to 10% of the cumulatively executed contract value till the month (excluding Taxes and Duties if payable extra). For this purpose, executed contract value excludes PVC, ORC and Extra/Supplementary Works.

11. Clause 2.14 of GCC (Quantity Variation)

a) Existing Clause 2.14.1 of GCC stands revised as follows:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

"The quantities given in the contract are tentative and may change to any extent (both in plus side and minus side). The quoted rates for individual items shall remain firm irrespective of any variations in the individual quantities. No compensation becomes payable in case the variation of the final executed contract value is within the limit of Minus (-) 15% of awarded contract value"

b) Existing Clause 2.14.2 ii). of GCC stands revised as follows:

"In case the finally executed contract value increases above the awarded Contract Value due to quantity variation, there will be no upward revision in the rates for the individual items and also contractor is not eligible for any compensation."

12. Clause 2.17 of GCC (Price Variation Compensation) stands revised as follows:

2.17 PRICE VARIATION COMPENSATION

2.17.1 In order to take care of variation in cost of execution of work on either side, due to variation in the index of LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS, Price Variation Formula as described herein shall be applicable (only for works executed during extended period, if any, subject to other conditions as described in this section)

2.17.2 85% component of Contract Value shall be considered for PVC calculations and remaining 15% shall be treated as fixed component. The basis for calculation of price variation in each category, their component, Base Index shall be as under:

SL NO	CATEGORY	BASE INDEX	PERCENTAGE COMPONENT ('K')				
			CIVIL PACKAGES (See Note AB/C)			MECHANICAL PACKAGES	Electrical, C&I Material Management/Handling and other labour oriented packages
			A	B	C		
i)	LABOUR (ALL CATEGORIES)	'MONTHLY ALL-INDIA AVERAGE CONSUMER PRICE INDEX NUMBERS FOR INDUSTRIAL WORKERS' published by Labour Bureau, Ministry of Labour and Employment, Government of India. (Website: labourbureau.nic.in)	40	25	30	65	80
ii)	HIGH SPEED DIESEL OIL	Name of Commodity: HSD Commodity Code: 1202000005 (See Note E)	5	3	5	5	5
iii)	WELDING ROD	Name of Commodity: MANUFACTURE OF BASIC METALS Commodity Code: 1314000000 (See Note E)				15	
iv)	CEMENT	Name of Commodity: ORDINARY PORTLAND CEMENT Commodity Code: 1313050003 (See Note E)		20	30		
v)	STEEL (Structural and Reinforcement Steel)	Name of Commodity: MILD STEEL: LONG PRODUCTS Commodity Code: 1314040000 (See Note E)		25			
vi)	ALL OTHER MATERIALS (Other than Cement & Steel)	Name of Commodity: ALL COMMODITIES Commodity Code: 1000000000 (See Note E)	40	12	20		

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Note: A) Cement & Steel:Free Issue (BHEL Scope)
 B) Cement & Steel :In Contractor Scope
 C) Cement in Contractor Scope, and Steel is Free Issue (BHEL Scope)
 D) For Composite packages (i.e. Civil+Mechanical+Electrical and/or CI or Civil+Mechanical or Mechanical+Electrical and/or CI), the COMPONENT ('K') for various categories shall be as per respective packages as above.
 E) As per the 'MONTHLY WHOLE SALE PRICE INDEX' for the respective Commodity and Type, published by Office of Economic Adviser, Ministry of Commerce and Industry, Government of India. (Website: <http://eaindustry.nic.in/home.asp>). Revisions in the index or commodity will be re adjusted accordingly.

2.17.3 #

2.17.4 Payment/recovery due to variation in index shall be determined on the basis of the following notional formula in respect of the identified COMPONENT ('K') viz LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS.

$$P = K \times R \times \frac{(X_N - X_0)}{X_0}$$

Where

P =Amount to be paid/recovered due to variation in the Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

K = Percentage COMPONENT ('K') applicable for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

R=Value of work done for the billing month (Excluding Taxes and Duties if payable extra)

X_N = Revised Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials for the billing month under consideration

X₀ = Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials as on the Base date

2.17.5 Base date shall be the calendar month of the schedule completion date (i.e. Actual start date+ Scheduled Contractual completion period as per Letter of Intent/award and/or work order).

2.17.6 PVC shall not be payable for the ORC amount, Supplementary/Additional Items, Extra works.

However, PVC will be payable for items executed under quantity variation of BOQ items under originally awarded contract.

2.17.7 The contractor shall furnish necessary monthly bulletins in support of the requisite indices from the relevant websites along with his Bills.

2.17.8 The contractor will be required to raise the bills for price variation payments on a monthly basis along with the running bills irrespective of the fact whether any increase/decrease in the index for relevant categories has taken place or not. In case there is delay in publication of bulletins (final figure), the provisional values as published can be considered for payments and arrears shall be paid/recovered on getting the final values.

2.17.9 PVC shall be applicable only, during the extended period of contract (if any) after the scheduled completion period and for the portion of work delayed / backlog for the reasons not attributable to the Contractor.

However total quantum of Price Variation amount payable/recoverable shall be regulated as follows:

- i. For the portion of shortfall / backlog not attributable to contractor, PVC shall be worked out on the basis of indices applicable for the respective month in which work is done. Base index shall be applicable as defined in clause 2.17.5
- ii. In case of Force majeure, PVC shall be regulated as per (a) or (b) below:
 - a) Force majeure is invoked before "base date"/ "revised base date" (as explained below) OR immediately after "base date"/ "revised base date" in continuation (i.e. during the period when PVC is not applicable):

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

1. Base date shall be revised: Revised base date =Previous base date+ duration of Force majeure.
No PVC will be applicable for the work done till revised base date.
2. PVC will be applicable for the work done after "base date"/ "revised base date" as the case may be (during extended period when delay is not attributable to contractor). PVC shall be worked out on the basis of indices applicable for the respective month in which work is done with base index as on "base date"/"revised base date" as the case may be.

b) Force majeure is invoked after "base date"/ "revised base date" as the case may be (during extended period when delay is not attributable to contractor) -

1. PVC shall be applicable for the work done after revocation of force majeure.
2. PVC for the work done after revocation of force majeure shall be worked out on the basis of indices applicable for the respective month in which work is done excluding the effect of change in indices during total period of Force majeure(s) invoked after "base date"/ "revised base date" as the case may be. Base index shall be taken as on "base date"/ "revised base date" as the case may be.

iii. The total amount of PVC shall not exceed 15% of the cumulatively executed contract value. Executed contract value for this purpose is exclusive of PVC, ORC, Supplementary/Additional Items and Extra works except extra items due to quantity variation.

13. Clause 2.2 of GCC (Law governing the contract and court jurisdiction) stands revised as follows:

"The contract shall be governed by the Law for the time being in force in the Republic of India. Subject to Clause 2.21.1 or 2.21.2 of this Contract, the Civil Court having original Civil Jurisdiction at Delhi for PSNR, at Kolkata for PSER, at Nagpur for PSWR and at Chennai for PSSR, shall alone have exclusive jurisdiction in regard to all matters in respect of the Contract."

14. Existing Clause 2.21 "ARBITRATION" of GCC has been amended as follows:

2.21 ARBITRATION & CONCILIATION

2.21.1 ARBITRATION:

2.21.1.1 Except as provided elsewhere in this Contract, in case Parties are unable to reach amicable settlement (whether by Conciliation to be conducted as provided in Clause 2.21.2 herein below or otherwise) in respect of any dispute or difference; arising out of the formation, breach, termination, validity or execution of the Contract; or, the respective rights and liabilities of the Parties; or, in relation to interpretation of any provision of the Contract; or, in any manner touching upon the Contract (hereinafter referred to as the 'Dispute'), then, either Party may, commence arbitration in respect of such Dispute by issuance of a notice in terms of section 21 of the Arbitration & Conciliation Act, 1996 (hereinafter referred to as the 'Notice'). The Notice shall contain the particulars of all claims to be referred to arbitration in sufficient detail and shall also indicate the monetary amount of such claim. The arbitration shall be conducted by a sole arbitrator to be appointed by the Head of the BHEL Power Sector Region issuing the Contract within 60 days of receipt of the complete Notice. The language of arbitration shall be English.

The Arbitrator shall pass a reasoned award.

Subject as aforesaid, the provisions of Arbitration and Conciliation Act 1996 (India) or statutory modifications or re-enactments thereof and the rules made thereunder as in force from time to time shall apply to the arbitration proceedings under this clause. The seat of arbitration shall be Kolkata (the place from where the contract is Issued). The Contract shall be governed by and be construed as per provisions of the laws of India. Subject to this provision 2.21.1.1 regarding ARBITRATION, the

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

principal civil court exercising ordinary civil jurisdiction over the area where the seat of arbitration is located shall have exclusive jurisdiction over any DISPUTE to the exclusion of any other court.

- 2.21.1.2 In case of Contract with Public Sector Enterprise (PSE) or a Government Department, the following shall be applicable:

In the event of any dispute or difference relating to the interpretation and application of the provisions of commercial contract(s) between Central Public Sector Enterprises (CPSEs)/ Port Trusts inter se and also between CPSEs and Government Departments/Organizations (excluding disputes concerning Railways, Income Tax, Customs & Excise Departments), such dispute or difference shall be taken up by either party for resolution through AMRCD (Administrative Mechanism for Resolution of CPSEs Disputes) as mentioned in DPE OM No. 4(1)/2013-DPE(GM)/FTS-1835 dated 22-05-2018 as amended from time to time.

- 2.21.1.3 The cost of arbitration shall initially be borne equally by the Parties subject to the final allocation thereof as per the award/order passed by the Arbitrator.

- 2.21.1.4 Notwithstanding the existence of any dispute or differences and/or reference for the arbitration, the Contractor shall proceed with and continue without hindrance the performance of its obligations under this Contract with due diligence and expedition in a professional manner unless the dispute inter-alia relates to cancellation, termination or short-closure of the Contract by BHEL.

2.21.2 CONCILIATION:

If at any time (whether before, during or after the arbitral or judicial proceedings), any Disputes (which term shall mean and include any dispute, difference, question or disagreement arising in connection with construction, meaning, operation, effect, interpretation or breach of the agreement, contract), which the Parties are unable to settle mutually, arise inter-se the Parties, the same may, be referred by either party to Conciliation to be conducted through Independent Experts Committee (IEC) to be appointed by competent authority of BHEL from the BHEL Panel of Conciliators.

Notes:

1. No serving or a retired employee of BHEL/Administrative Ministry of BHEL shall be included in the BHEL Panel of Conciliators.
2. Any other person(s) can be appointed as Conciliator(s) who is/are mutually agreeable to both the parties from outside the BHEL Panel of Conciliators.

The proceedings of Conciliation shall broadly be governed by Part-III of the Arbitration and Conciliation Act 1996 or any statutory modification thereof and as provided in Procedure 2.3 to this GCC. The Procedure 2.3 together with its Formats will be treated as if the same is part and parcel hereof and shall be as effectual as if set out herein in this GCC.

The Contractor hereby agrees that BHEL may make any amendments or modifications to the provisions stipulated in the Procedure 2.3 to this GCC from time to time and confirms that it shall be bound by such amended or modified provisions of the Procedure 2.3 with effect from the date as intimated by BHEL to it.

2.21.3 No Interest payable to Contractor

Notwithstanding anything to the contrary contained in any other document comprising in the Contract, no interest shall be payable by BHEL to Contractor on any moneys or balances including but not limited to the Security Deposit, EMD, Retention Money, RA Bills or the Final Bill, or any amount withheld and/or appropriated by BHEL etc., which becomes or as the case may be, is adjudged to be due from BHEL to Contractor whether under the Contract or otherwise.

15. Clause no. 2.7.2 and 2.7.3 of Volume-IB-GCC shall be revised as follows:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

2.7.2.1 To terminate the contract or withdraw portion of work and get it done through other agency, at the risk and cost of the contractor after due notice of a period of 14 days' by BHEL in any of the following cases:

- i). Contractor's poor progress of the work vis-à-vis execution timeline as stipulated in the Contract, backlog attributable to contractor including unexecuted portion of work does not appear to be executable within balance available period considering its performance of execution.
- ii). Withdrawal from or abandonment of the work by contractor before completion of the work as per contract.
- iii). Non-completion of work by the Contractor within scheduled completion period as per Contract or as extended from time to time, for the reasons attributable to the contractor.
- iv). Termination of Contract on account of any other reason (s) attributable to Contractor.
- v). Assignment, transfer, subletting of Contract without BHEL's written permission.
- vi). Non-compliance to any contractual condition or any other default attributable to Contractor.

Risk & Cost Amount against Balance Work:

Risk & Cost amount against balance work shall be calculated as follows: Risk & Cost Amount= [(A-B) + (A x H/100)]

Where,

A= Value of Balance scope of Work (*) as per rates of new contract

B= Value of Balance scope of Work (*) as per rates of old contract being paid to the contractor at the time of termination of contract i.e. inclusive of PVC & ORC, if any.

H = Overhead Factor to be taken as 5

In case (A-B) is less than 0 (zero), value of (A-B) shall be taken as 0 (zero).

* Balance scope of work (in case of termination of contract):

Difference of Contract Quantities and Executed Quantities as on the date of issue of Letter for 'Termination of Contract', shall be taken as balance scope of Work for calculating risk & cost amount. Contract quantities are the quantities as per original contract. If, Contract has been amended, quantities as per amended Contract shall be considered as Contract Quantities.

Items for which total quantities to be executed have exceeded the Contract Quantities based on drawings issued to contractor from time to time till issue of Termination letter, then for these items total Quantities as per issued drawings would be deemed to be contract quantities.

Substitute/ extra items whose rates have already been approved would form part of contract quantities for this purpose. Substitute/ extra items which have been executed but rates have not been approved, would also form part of contract quantities for this purpose and rates of such items shall be determined in line with contractual provisions.

However, increase in quantities on account of additional scope in new tender shall not be considered for this purpose.

NOTE: In case portion of work is being withdrawn at risk & cost of contractor instead of termination of contract, contract quantities pertaining to portion of work withdrawn shall be considered as 'Balance scope of work' for calculating Risk & Cost amount.

LD against delay in executed work in case of Termination of Contract:

LD against delay in executed work shall be calculated in line with LD clause no. 2.7.9 of GCC, for the delay attributable to contractor. For limiting the maximum value of LD, contract value shall be taken as Executed Value of work till termination of contract.

Method for calculation of "LD against delay in executed work in case of termination of contract" is given below.

- i). Let the time period from scheduled date of start of work till termination of contract excluding the period of Hold (if any) not attributable to contractor = T1

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- ii) Let the value of executed work till the time of termination of contract= X
- iii) Let the Total Executable Value of work for which inputs/fronTS were made available to contractor and were planned for execution till termination of contract = Y
- iv) Delay in executed work attributable to contractor i.e. $T2 = [1 - (X/Y)] \times T1$
- v) LD shall be calculated in line with LD clause (clause 2.7.9) of the Contract for the delay attributable to contractor taking "X" as Contract Value and "T2" as period of delay attributable to contractor.

2.7.2.2 In case Contractor fails to deploy the resources as per requirement, BHEL can deploy own/hired/otherwise arranged resources at the risk and cost of the contractor and recover the expenses incurred from the dues payable to contractor. Recoveries shall be actual expenses incurred plus 5% overheads or as defined in TCC.

2.7.3 Recoveries arising out of Risk & Cost and LD or any other recoveries due from Contractor

Following sequence shall be applicable for recoveries from contractor:

- a) Dues available in the form of Bills payable to contractor, SD, BGs against the same contract.
- b) Demand notice for deposit of balance recovery amount shall be sent to contractor, if funds are insufficient to effect complete recovery against dues indicated in (a) above.
- c) If contractor fails to deposit the balance amount to be recovered within the period as prescribed in demand notice, following action shall be taken for balance recovery:
 - i) Dues payable to contractor against other contracts in the same Region shall be considered for recovery.
 - ii) If recovery cannot be made out of dues payable to the contractor as above, balance amount to be recovered, shall be informed to other Regions/Units for making recovery from the Unpaid Bills/Running Bills/SD/BGs/Final Bills of contractor.
 - iii) In-case recoveries are not possible with any of the above available options, Legal action shall be initiated for recovery against contractor.

16. Clause 2.24 of GCC (Performance Guarantee for Workmanship)

Term "Special Conditions of Contract" appearing in 3rd line of the current clause 2.24.1, is replaced by "Technical Conditions of Contract"

17. Clause 4.2.1.7 of Special Condition of Contract (SCC)

At the end of Clause 4.2.1.7 (i.e. after the line "Decision of BHEL shall be final and binding on the contractor") following para is to be added

"It is not obligatory on the part of BHEL to provide any tools and tackles or other materials other than those specifically agreed to do so by BHEL. However, depending upon the availability, BHEL /BHEL's Customer handling equipment and other plants may be made available to the contractor on payment of hire charges as fixed, subject to the conditions laid down by BHEL/Customer from time to time. Unless paid in advance, such hire charges, if applicable, shall be recovered from contractor's bill / security deposit or any other due payment in one installment."

18. Clause 9.61 of SCC (NON-COMPLIANCE)

Under NON-COMPLIANCE, at the end of Clause 9.61 (i.e. after the line "Also the amount will be spent for purchasing the safety appliances and supporting the safety activity at site.") following para is to be added:

"In case of any financial deduction made by Customer for lapses of safety other than what is provided above or elsewhere in the contract, the same shall be charged on back-to-back basis on the defaulting contractor without prejudice to any other right spelt anywhere in the tender / contract"

19. Clause 2.15 of GCC (EXTRA WORKS)

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Existing Clause 2.15.5 of GCC stands revised as follows:

“After eligibility of extra works is established and finally accepted by BHEL engineer/designer, payment will be released on competent authority's approval at the following rate.

MAN-HOUR RATE FOR ELIGIBLE EXTRA WORKS: Single composite average labour man-hour rate, including overtime if any, supervision, use of tools and tackles and other site expenses and incidentals, consumables for carrying out any major rework/ repairs/ rectification/ modification/ fabrication as certified by site as may arise during the course of erection, testing, commissioning or extra works arising out of transit, storage and erection damages, payment, if found due will be at Rs 108/- per man hour.”

20. Clause 9.1 & 9.2 to 9.62 of SCC (HSE & OHSAS Obligations)

Cl. no. 9.0	No change
Cl. no. 9.1	HSE (Health, safety & Environment): Contractor will comply with HSE (Health, safety & Environment) requirements of BHEL as per “HSE Plan for Site Operations by Sub-contractors” (Document no. HSEP:14 (Latest Revision) attached with this tender.
Cl. no. 9.2 to 9.62	Deleted

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure -BTerms & Conditions of Reverse Auction

Against this enquiry for the subject item/ system with detailed scope of supply/service as per tender specifications, BHEL shall be resorting to "REVERSE AUCTION PROCEDURE" i.e., ON LINE BIDDING (THROUGH A SERVICE PROVIDER). The philosophy followed for reverse auction shall be English Reverse (No ties).

1. For the proposed reverse auction, technically and commercially acceptable bidders only shall be eligible to participate.
2. Price bids of all techno-commercially qualified bidders shall be opened and same shall be considered as initial bids of bidders in RA.
3. BHEL will engage the services of a service provider who will provide all necessary training and assistance before commencement of on line bidding on internet.
4. In case of reverse auction, BHEL will inform the bidders the details of Service Provider to enable them to contact & get trained for participation in the reverse auction.
5. Business rules like event date, time, bid decrement, extension etc. also will be communicated through service provider for compliance.
6. Bidders have to fax /e-mail the Compliance form (annexure III) before start of Reverse auction. Without this, the bidder will not be eligible to participate in the event.
7. In line with the NIT terms, BHEL will provide the calculation sheet (e.g., EXCEL sheet) which will help to arrive at "Total Cost to BHEL" which is inclusive of all cost elements in line with terms & conditions of the tender for each of the bidder to enable them to fill-in the price and keep it ready for keying in during the Auction.
8. Reverse auction will be conducted on scheduled date & time.
9. At the end of Reverse Auction event, the lowest bidder value will be known on auction portal.
10. The lowest bidder has to fax/e-mail the duly signed and filled-in prescribed format for price breakup including that of line items, if required, (Annexure IV) as provided on case-to-case basis to Service provider within two working days of Auction without fail.
11. Bidders shall be required to read the "Terms and Conditions" section of the auctions site of Service provider, using the Login IDs and passwords given to them by the service provider before reverse auction event. Bidders should acquaint themselves of the "Business Rules of Reverse Auction", which will be communicated before the Reverse Auction.
12. If the Bidder or any of his representatives are found to be involved in Price manipulation/ cartel formation of any kind, directly or indirectly by communicating with other bidders, action as per extant BHEL guidelines, shall be initiated by BHEL and the results of the RA scrapped/ aborted.
13. The Bidder shall not divulge either his Bids or any other exclusive details of BHEL to any other party.
14. In case of more than four techno commercially qualified bidders, H1 bidder (whose quote is highest in sealed envelope price bid) shall not be allowed to participate in RA. However, there will be no H1 removal in case H1 happens to be MSE or qualifying under PPP-MII, Order 2017 irrespective of the number of bidders qualifying techno-commercially. In case of multiple H1 bidders, all H1 bidders (excluding MSEs and bidders qualifying under PPP-MII, Order 2017) shall be removed provided minimum three bidders remain in fray, else no H1 removal.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure -C**Certificate by Chartered Accountant on letter head**(applicable upto 31st March'2021 in line with MSME notification no. S.O. 2119 (E), dated 26th June'2020)

This is to Certify that M/S ,
 (hereinafter referred to as 'company') having its registered office at
 is registered under MSMED Act 2006, (Entrepreneur
 Memorandum No (Part—II)/ Udyam Registration Certificate No.
 dtd:
 Category:(Micro/Small/Medium)). (Copy enclosed).

Further verified from the Books of Accounts that the investment of the company as per the latest audited financial year..... as per MSMED Act 2006 is as follows:

1. For Manufacturing Enterprises: Investment in plant and machinery (i.e. original cost excluding land and building and the items specified by the Ministry of Small Scale Industries vide its notification No. S.O.1722(E) dated October 5, 2006:
Rs Lacs
2. For Service Enterprises: Investment in equipment (original cost excluding land and building and furniture, fittings and other items not directly related to the service rendered or as may be notified under the MSMED Act, 2006:
Rs Lacs
3. For Enterprises (having EM-II Certificate/ valid NSIC Certificate or Udyog Aadhar Memorandum): Investment in plant and machinery or equipment is Rs..... Lacs and turnover is Rs. Lacs (as notified in MSME notification no. S.O. 2119 (E) dated 26.06.2020)
4. For Enterprises (having EM-II Certificate/ valid NSIC Certificate or Udyog Aadhar Memorandum): Investment in plant and machinery or equipment is Rs..... Lacs and turnover is Rs. Lacs (as notified in MSME notification no. S.O. 2119 (E) dated 26.06.2020)

(Strike off whichever is not applicable)

The above investment of Rs.....Lacs is within permissible limit of Rs.....Lacs for Micro / Small/ Medium (*Strike off which is not applicable*) Category under MSMED Act 2006.

Or

The enterprise has been graduated upward from its original category (micro/small/medium) (*strike off which is not applicable*), the enterprise shall maintain its prevailing status till expiry of one year from the close of year of registration, as notified vide S.O. No. 2119 (E) dated 26.06.2020 published in the gazette notification dated 26.06.2020 by Ministry of MSME.

Or

The enterprise has been reverse-graduated from its original category (micro/small/medium) (*strike off which is not applicable*), the enterprise will continue in its present category till the closure of the financial year and it will be given the benefit of the changed status only with effect from 1st April of the financial year following the year in which such change took place, as notified vide S.O. No. 2119 (E) dated 26.06.2020 published in the gazette notification dated 26.06.2020 by Ministry of MSME.

Date:

(Signature)

Name:

Membership Number:

Seal of the Chartered Accountant

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure –D**Specific Clause w.r.t. BOCW Act & Cess Act**

1. It shall be the sole responsibility of the contractor as employer to ensure compliance of all the statutory obligations under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.
2. It shall be sole responsibility of the contractor engaging Building Workers in connection with the building or other construction works in the capacity of employer to apply and obtain registration certificate specifying the scope of work under the relevant provisions of the Building and Other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 from the appropriate Authorities.
3. It shall be responsibility of the contractor to furnish a copy of such Registration Certificate within a period of one month from the date of commencement of Work.
4. It is responsibility of the contractor to register under the Building and other Construction Workers' Welfare Cess Act, 1996 and deposit the required Cess for the purposes of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 at such rate as the Central Government may , by notification in the Official Gazette, from time to time specify. However, before registering and deposit of Cess under the Building and other Construction Workers' Welfare Cess Act, 1996, the contractor will seek written prior approval from the Construction Manager.
5. In case where the contractor has been accorded written approval by the Construction Manager and the contractor is required to furnish information in Form I and deposit the Cess under the Building and other Construction Workers' Welfare Cess Act, 1996, fails to do so, BHEL reserves right to impose penalty at the rate of 30% of Cess Amount.
6. It shall be sole responsibility of the contractor as employer to get registered every Building Worker, who is between the age of 18 to 60 years of age and who has been engaged in any building or other construction work for not less than ninety days during the preceding twelve months as Beneficiary under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996.
7. It shall be sole responsibility of the contractor as employer to maintain all the registers, records, notices and submit returns under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.
8. It shall be sole responsibility of the contractor as employer to provide notice of poisoning or occupation notifiable diseases, to report of accident and dangerous occurrences to the concerned authorities under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the rules made thereunder and to make payment of all statutory payments & compensation under the Employees' Compensation Act, 1923.
9. It shall be responsibility of the Contractor to furnish BHEL on monthly basis, Receipts/ Challans towards Deposit of the Cess under the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder along with following statistics :
 - (i) Number of Building Workers employed during preceding one month.
 - (ii) Number of Building workers registered as Beneficiary during preceding one month.
 - (iii) Disbursement of Wages made to the Building Workers for preceding wage month.
 - (iv) Remittance of Contribution of Beneficiaries made during the preceding month
10. BHEL shall reimburse the contractor the Cess amount deposited for the purposes of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 under the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder. However, BHEL shall not reimburse the Fee paid towards the registration of establishment, fees paid towards registration of Beneficiaries and Contribution of Beneficiaries remitted.
11. It shall be responsibility of the Building Worker engaged by the Contractor and registered as a beneficiary under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 to contribute to the Fund at such rate per mensem as may be specified by the State government

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

by notification in the Official Gazette. Where such beneficiary authorizes the contractor being his employer to deduct his contribution from his monthly wages and to remit the same, the contractor shall remit such contribution to the Building and other construction Workers' Welfare Board in such manner as may be directed by the Board, within the fifteen days from such deduction.

12. If any point of time during the contract period, non-compliance of the provisions of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder is observed, BHEL reserves the right to withhold a reasonable amount from the payables to discharge any obligations on behalf of Contractors. The reasonable amount shall be decided by the Construction Manager in consultation with Resident Accounts Officer & Head HR and shall be final.
13. The contractor shall declare to undertake any liability or claim arising out of employment of building workers and shall indemnify BHEL from all consequences / liabilities / penalties in case of non compliance of the provisions of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.

ANNEXURE-E**Statewise GST Registration nos.**

Sl. No.	State / UT	GST Reg. No.
1	Andhra Pradesh	37AAACB4146P7Z8
2	Assam	18AAACB4146P1ZE
3	Bihar	10AAACB4146P1ZU
4	Chandigarh	04AAACB4146P1ZN
5	Chattishgarh	22AAACB4146P1ZP
6	Daman & Diu	25AAACB4146P1ZJ
7	Delhi	07AAACB4146P1ZH
8	Gujarat	24AAACB4146P1ZL
9	Haryana	06AAACB4146P1ZJ
10	HP	02AAACB4146P1ZR
11	Jharkhand	20AAACB4146P5ZP
12	Karnataka	29AAACB4146P1ZB
13	Kerala	32AAACB4146P1ZO
14	Maharashtra	27AAACB4146P1ZF
15	MP	23AAACB4146P1ZN
16	Punjab	03AAACB4146P2ZO
17	Rajasthan	08AAACB4146P1ZF
18	Tamil Nadu	33AAACB4146P2ZL
19	Telangana	36AAACB4146P1ZG
20	Tripura	16AAACB4146P1ZI
21	UP	09AAACB4146P2ZC
22	Uttarakhand	05AAACB4146P1ZL
23	West Bangal	19AAACB4146P1ZC
24	Mizoram	15AAACB4146P1ZK
25	Orissa	21AAACB4146P1ZR
26	Arunachal Pradesh	12AAACB4146P1ZQ

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE-F**UNDERTAKING**

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir/Madam,

Sub: DECLARATION REGARDING INSOLVENCY/ LIQUIDATION/ BANKRUPTCY PROCEEDINGS

Ref: NIT/Tender Specification No:

I/We, _____

declare that, I/We am/are not under insolvency resolution process or liquidation or Bankruptcy Code Proceedings (IBC) as on date, by NCLT or any adjudicating authority/authorities, which will render us ineligible for participation in this tender.

Sign. of the AUTHORISED SIGNATORY
(With Name, Designation and Company seal)

Place:

Date:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure- CPP-GST/II**Please arrange to submit this filled-up format along with Tender**

Name of the Company	
Address of Company*	
Company Registration Number*	
Name of Partners / Directors	
ALL THE STATES WHERE BIDDER HAS A PLACE OF BUSINESS*	
ALL ADDRESS OF VENDOR MENTIONING THEIR PIN AS PER THE LATEST GST REGISTRATION*	
GSTN OF ALL THE ABOVE NOTED PLACES OF VENDOR*	
Bidder Type: Indian/ Foreign*	
City*	
State*	
Country*	
Postal Code*	
PAN/TAN Number*	
Company's Establishment Year	
Company's Nature of Business*	
Company's Legal Status* {limited /undertaking/joint venture/partnership/other}	
Company Category* {micro unit as per MSME/small unit as per MSME/medium unit as per MSME/ UAN as per Udyog Aadhaar Memorandum/ Udyam Registration Certificate / Ancillary unit/project affected person of this company/ssi/ other} Relevant documents to be submitted as applicable.	
Enter Company's Contact Person Details	
Title(Mr. / Mrs. / Ms. / Dr. / Shri)*	
Contact Name*	
Date Of Birth*	
Correspondence Email*	
(Correspondence Email ID can be same as your Login ID. All the mail correspondence will be sent only to the Correspondence Email ID.)	
Designation	
Phone*	
Fax*	
Mobile*	

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Form-1 (Format for local content)

DECLARATION REGARDING MINIMUM LOCAL CONTENT IN LINE WITH
REVISED PUBLIC PROCUREMENT (PREFERENCE TO MAKE IN INDIA), ORDER 2017 DATED 04TH JUNE, 2020
AND SUBSEQUENT ORDER(S)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub: Declaration reg. minimum local content in line with Public Procurement (Preference to Make in India), Order 2017-Revision, dated 04th June, 2020 and subsequent order(s).

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

We hereby certify that the items/works/services offered by..... (specify the name of the organization here) has a local content of _____ % and this meets the local content requirement for 'Class-I local supplier' / 'Class II local supplier' ** as defined in Public Procurement (Preference to Make in India), Order 2017-Revision dated 04.06.2020 issued by DPIIT and subsequent order(s).

The details of the location(s) at which the local value addition is made are as follows:

1. _____	2. _____
3. _____	4. _____

...

...

...

Thanking you,
Yours faithfully,

(Signature, Date & Seal of Authorized Signatory of the bidder)

** - Strike out whichever is not applicable.

Note:

1. Bidders to note that above format Duly filled & signed by authorized signatory, shall be submitted along with the techno-commercial offer.
2. In the event of false declaration, actions as per the above order and as per BHEL Guidelines shall be initiated against the bidder.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

FORM – 3DECLARATION REGARDING COMPLIANCE TO RESTRICTIONS UNDER RULE 144 (xi) OF GFR 2017
(To be submitted in the bidder's letter head)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub: Declaration regarding compliance to Restrictions under Rule 144 (xi) of GFR 2017

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

I have read the clause regarding restrictions on procurement from a bidder of a country which shares a land border with India and on sub-contracting to contractors from such countries. I certify that _____ (specify the name of the organization here), is not from such a country / has been registered with the Competent Authority (attach valid registration by the Competent Authority, i.e., the Registration Committee constituted by the Dept. for Promotion of Industry and Internal Trade (DPIIT)); and will not sub-contract any work to a contractor from such countries unless such contractor is registered with the Competent Authority. (attach relevant valid registration, if applicable)

I hereby certify that we fulfil all requirements in this regard and is eligible to be considered.

Thanking you,
Yours faithfully,

(Signature, Date & Seal of
Authorized Signatory of the Bidder)

Note: Bidders to note that in case above certification given by a bidder, whose bid is accepted, is found to be false, then this would be a ground for immediate termination and for taking further action in accordance with law and as per BHEL guidelines.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Bharat Heavy Electricals Limited		
Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 1 OF 30

TABLE OF CONTENTS

1. Chapter-1 : General Instructions to Tenderers

- 1.1. Despatch Instructions
- 1.2. Submission of Tenders
- 1.3. Language
- 1.4. Price Discrepancy
- 1.5. Qualification of Tenderers
- 1.6. Evaluation of Bids
- 1.7. Data to be enclosed
- 1.8. Authorisation and Attestation
- 1.9. Earnest Money Deposit
- 1.10. Security Deposit
- 1.11. Return of Security Deposit
- 1.12. Bank Guarantee
- 1.13. Validity of offer
- 1.14. Execution of Contract Agreement
- 1.15. Rejection of Tender and other Conditions

2. Chapter-2

- 2.1. Definitions
- 2.2. Law Governing Contract and Court Jurisdiction
- 2.3. Issue of Notice
- 2.4. Use of land
- 2.5. Commencement of Work

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 2 OF 30

- 2.6. Measurement of Work and Mode of Payment
- 2.7. Rights of BHEL
- 2.8. Responsibilities of Contractor in respect of Local Laws, Employment of Workers etc
- 2.9. Progress Monitoring, Monthly Review and Performance Evaluation
- 2.10. Time of Completion
- 2.11. Extension of Time for Completion
- 2.12. Over Run Compensation
- 2.13. Interest Bearing Recoverable Advances
- 2.14. Quantity Variation
- 2.15. Extra Works
- 2.16. Supplementary Items
- 2.17. Price Variation Clause
- 2.18. Insurance
- 2.19. Strikes & Lockout
- 2.20. Force Majeure
- 2.21. Arbitration and Reconciliation
- 2.22. Retention Amount
- 2.23. Payments
- 2.24. Performance Guarantee for Workmanship
- 2.25. Closing of Contracts
- 2.26. Reverse Auction
- 2.27. Suspension of Business Dealings
- 2.28. Other Issues

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 3 OF 30

CHAPTER -1

1. GENERAL INSTRUCTION TO TENDERERS

1.1. DESPATCH INSTRUCTION

- i) The General Conditions of Contract form part of the Tender specifications. All pages of the tender documents shall be duly signed, stamped and submitted along with the offer in token of complete acceptance thereof. The information furnished shall be complete by itself. The tenderer is required to furnish all the details and other documents as required in the following pages
- ii) Tenderers are advised to study all the tender documents carefully. Any submission of tender by the tenderer shall be deemed to have been done after careful study and examination of the tender documents and with the full understanding of the implications thereof. Should the tenderers have any doubt about the meaning of any portion of the Tender Specification or find discrepancies or omissions in the drawings or the tender documents issued are incomplete or shall require clarification on any of the technical aspect, the scope of work etc., he shall at once, contact the authority inviting the tender well in time (so as not to affect last date of submission) for clarification before the submission of the tender. Tenderer's request for clarifications shall be with reference to Sections and Clause numbers given in the tender documents. The specifications and terms and conditions shall be deemed to have been accepted by the tenderer in his offer. Non compliance with any of the requirements and instructions of the tender enquiry may result in the rejection of the tender.
- iii) Integrity pact (IP) shall be applicable for all tenders / contracts if indicated in NIT. This integrity pact shall be issued as part of the Tender documents and shall be returned by the bidder along with Techno-commercial bid duly filled, signed and stamped by the authorized signatory who signs the bid. Only those vendors / bidders who have entered into such an IP with BHEL shall be considered qualified to participate in the bidding. Entering into this pact shall be a preliminary qualification.

1.2. SUBMISSION OF TENDERS

- 1.2.1 The tenderers must submit their tenders to Officer inviting tender as per instructions in the NIT
- 1.2.2 Tenders submitted by post shall be sent by 'REGISTERED POST ACKNOWLEDGEMENT DUE / by COURIER' and shall be posted with due allowance for any postal/courier delays. BHEL takes no responsibility for delay, loss or non-receipt of tenders sent by post/courier. The tenders received after the specified time of their submission are treated as 'Late Tenders' and shall not be considered under any circumstances. Offers received by Fax/Email/Internet shall be considered as per terms of NIT.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 4 OF 30

1.2.3 Tenders shall be opened by authorised Officer of BHEL at his office at the time and date as specified in the NIT, in the presence of such of those tenderers or their authorised representatives who may be present

1.2.4 Tenderers whose bids are found techno commercially qualified shall be informed the date and time of opening of the Price Bids and such Tenderers may depute their representatives to witness the opening of the price bids. BHEL's decision in this regard shall be final and binding.

1.2.5 Before submission of Offer, the tenderers are advised to inspect the site of work and the environments and be well acquainted with the actual working and other prevalent conditions, facilities available, position of material and labour, means of transport and access to Site, accommodation, etc. No claim will be entertained later on the grounds of lack of knowledge of any of these conditions.

1.3. LANGUAGE

1.3.1 The tenderer shall quote the rates in English language and international numerals. These rates shall be entered in figures as well as in words. For the purpose of the tenders, the metric system of units shall be used.

1.3.2 All entries in the tender shall either be typed or written legibly in ink. Erasing and over-writing is not permitted and may render such tenders liable for rejection. All cancellations and insertions shall be duly attested by the tenderer.

1.4 PRICE DISCREPANCY:

1.4.1 Conventional (Manual) Price Bid opening : In the case of price bid opening without resorting to Reverse Auction, if there are differences between the rates given by the tenderer in words and figures or in amount worked out by him, the following procedure for evaluation and award shall be followed:

- i) When there is a difference between the rates in figures and in words, the rates which corresponds to the amounts worked out by the contractor, shall be taken as correct
- ii) When the amount of an item is not worked out by the contractor or it does not correspond with the rate written either in figure or in words, then the rate quoted by the contractor in words shall be taken as correct
- iii) When the rate quoted by the contractor in figures and words tallies but the amount is not worked out correctly, the rate quoted by the contractor shall be taken as correct and not the amount.
- iv) In case of lumpsum price, if there is any difference between the amount in figures and in words, the amount quoted by the bidder in words shall be taken as correct.
- v) In case of omission in quoting any rate for one or more items, the evaluation shall be done considering the highest quoted rate obtained against the respective items by other tenderers for the subject tender. If the tenderer becomes L-1, the notional rates for the omission items shall be the lowest rates quoted for the respective items by the other tenderers against the respective omission items for the subject job and the 'Total quoted price (loaded for omissions)' shall be arrived at. However the overall price remaining the same as quoted originally, the rates for all the items in the 'Total quoted price (loaded for omissions)' shall be reduced item wise in proportion to the ratio of 'Original' total price and the 'Total quoted price (loaded for omissions)'.
- vi) The 'Final Total Amount' shall be arrived at after considering the amounts worked out in line with 'i' to 'iv' above.

1.4.2 Reverse Auction: In case of Reverse Auction, the successful bidder shall undertake to execute

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 5 OF 30

the work as per overall price offered by him during the Reverse Auction process. In case of omission of rates, the procedure shall be as per 'Guidelines for Reverse Auction' enclosed.

1.5. QUALIFICATION OF TENDERERS

- i) Only tenderers who have previous experience in the work of the nature and description detailed in the Notice Inviting Tender and/or tender specification are expected to quote for this work duly detailing their experience along with offer.
- ii) Offers from tenderers who do not have proven and established experience in the field shall not be considered
- iii) .Offers from tenderers who are under suspension (banned) by any Unit/Region/Division of BHEL shall not be considered.
- iv) Offers from tenderers who do not comply with the latest guidelines of Ministry/Commissions of Govt of India shall not be considered.

1.6. EVALUATION OF BIDS

- i) Technical Bids submitted by the tenderer will be opened first and evaluated for fulfilling the Pre Qualification criteria and other conditions in NIT/Tender documents, based on documentary evidences submitted along with the offer
- ii) In case the same qualifying experience is claimed by more than one agency, then the agency who has executed the work as per documentary evidence submitted shall only be qualified. Scope of qualifying work should be totally with the agency who has executed and in case it is only labour+consumables without T&P, then the responsibility of execution is assigned to the first agency and not to the agency who has executed only as labour supply contractor. Further, BHEL reserves the right to ask for further proofs including submission of TDS certificates for the said job
- iii) In case the qualifying experience is claimed by private organizations based on Work Order and completion certificates from another private organization, BHEL reserves the right to ask for further proofs including submission of TDS certificates for the said job
- iv) Assessing Bidder Capacity for executing the current tender shall be as per Notice Inviting Tender
- v) Price Bids of shortlisted bidders shall only be opened either through the conventional price bid opening or through electronic Reverse Auction, at the discretion of BHEL
- vi) Price Bids of unqualified bidders shall not be opened. Reasons for rejection shall be intimated in due course after issue of LOI/LOA to successful bidder and receipt of unqualified acceptance from the successful bidder
- vii) Bidders are advised to also refer to clause no 2.9.4 regarding evaluation of their performance in ongoing projects for the current tender

1.7. DATA TO BE ENCLOSED

Full information shall be given by the tenderer in respect of the following. Non-submission of this information may lead to rejection of the offer.

- i) **INCOME TAX PERMANENT ACCOUNT NUMBER**
Certified copies of Permanent Account Numbers as allotted by Income Tax Department for the Company/Firm/Individual Partners, etc. shall be furnished along with tender.
- ii) **ORGANIZATION CHART**
The organization chart of the tenderer's organization, including the names, addresses and contact

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 6 OF 30

information of the Directors/Partners shall be furnished along with the offer.

- iii) An attested copy of the Power of Attorney, in case the tender is signed by an individual other than the sole proprietor
- iv) IN CASE OF INDIVIDUAL TENDERER:
His / her full name, address and place & nature of business.
- v) IN CASE OF PARTNERSHIP FIRM
The names of all the partners and their addresses, A copy of the partnership deed/instrument of partnership duly certified by the Notary Public shall be enclosed.
- vi) IN CASE OF COMPANIES:
 - a. Date and place of registration including date of commencement certificate in case of Public Companies (certified copies of Memorandum and articles of Association are also to be furnished).
 - b. Nature of business carried on by the Company and the provisions of the Memorandum relating thereof.

1.8 AUTHORISATION AND ATTESTATION

Tenders shall be signed by a person duly authorized/empowered to do so. An attested copy of the Power of Attorney, in case the tender is signed by an individual other than the sole proprietor shall be submitted along with the tenders

1.9 EARNEST MONEY DEPOSIT

1.9.1 Every tender must be accompanied by the prescribed amount of Earnest Money Deposit (EMD) in the manner described herein.

- i) EMD shall be furnished along with the offer in full as per the amount indicated in the Special Conditions of Contract / NIT
- ii) EMD is to be paid in cash (as permissible under Income Tax Act), Pay order or Demand Draft in favour of 'Bharat Heavy Electricals Limited' and payable at Regional HQ issuing the tender.
- iii) No other form of EMD remittance shall be acceptable to BHEL
- iv) Bidder may opt to deposit "One Time EMD" of Rs. 2.0 lakhs (Rupees Two lakhs only) with BHEL:Power Sector Region HQ issuing the tender, which will enable them to participate in all the future tender enquiries in respect of Erection and Commissioning services issued from the respective office. Interested bidders may clearly send their consent for converting the present EMD into a "One Time EMD" in their offer.
 - Note : The 'One Time EMD' cannot be withdrawn by the tenderers within 3 years from the date of deposit, under any circumstances. The Tenderer who wishes to withdraw after three years will not be allowed to submit 'One Time EMD' again.
- v) Bidders who have already deposited such "One Time EMD" of Rs. 2.00 lakh are exempted from submission of EMD for this tender. However a copy of 'One Time EMD' certificate issued by BHEL Regional HQ issuing the tender shall be enclosed along with the offer.

1.9.2 EMD by the bidder will be forfeited as per Tender Documents if

- i) After opening the tender, the bidder revokes his tender within the validity period or increases his

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 7 OF 30

earlier quoted rates.

- ii) The bidder does not commence the work within the period as per LOI/Contract. In case the LOI / contract is silent in this regard then within 15 days after award of contract.

1.9.3 EMD shall not carry any interest.

1.9.4 In the case of unsuccessful bidders, the Earnest Money will be refunded to them within a reasonable time after acceptance of award by successful tenderer.

1.10 SECURITY DEPOSIT

1.10.1 Upon acceptance of Tender, the successful Tenderer should deposit the required amount of Security Deposit for satisfactory completion of work, as per the rates given below:

SN	Contract Value	Security Deposit Amount
1	Up to Rs. 10 lakhs	10% of Contract Value
2	Above Rs. 10 lakhs upto Rs.50 lakhs	1 lakh + 7.5% of the Contract Value exceeding Rs. 10 lakhs.
3	Above Rs. 50 lakhs	Rs 4 lakhs + 5% of the Contract Value exceeding Rs. 50 lakhs.

1.10.2 The security Deposit should be furnished before start of the work by the contractor.

1.10.3 Security Deposit may be furnished in any one of the following forms

- i) Cash (as permissible under the Income Tax Act)
- ii) Pay Order / Demand Draft in favour of BHEL.
- iii) Local cheques of scheduled banks, subject to realization.
- iv) Securities available from Post Offices such as National Savings Certificates, Kisan Vikas Patras etc. (Certificates should be held in the name of Contractor furnishing the security and duly pledged in favour of BHEL and discharged on the back).
- v) Bank Guarantee from Scheduled Banks / Public Financial Institutions as defined in the Companies Act. The Bank Guarantee format for Security Deposit shall be in the prescribed formats
- vi) Fixed Deposit Receipt issued by Scheduled Banks / Public Financial Institutions as defined in the Companies Act. The FDR should be in the name of the contractor, A/C BHEL, duly discharged on the back.
- vii) Security deposit can also be recovered at the rate of 10% from the running bills. However in such cases at least 50% of the Security Deposit should be deposited in any form as prescribed before start of the work and the balance 50% may be recovered from the running bills.
- viii) EMD of the successful bidder can be converted and adjusted against the cash portion of Security Deposit excepting for such bidders who have remitted One Time EMD.

NOTE: Acceptance of Security Deposit against Sl. No. (iv) and (vi) above will be subject to hypothecation or endorsement on the documents in favour of BHEL. However, BHEL will not be liable or responsible in any manner for the collection of interest or renewal of the documents or in any other matter connected therewith.

1.10.4 The Security Deposit shall not carry any interest.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 8 OF 30

1.10.5 In case the value of work exceeds / reduces from the awarded / accepted value, the Security Deposit shall be correspondingly enhanced / reduced as given below:

- i) The enhanced part of the Security Deposit shall be immediately deposited by the Contractor or adjusted against payments due to the Contractor.
- ii) There will be no reduction in Security Deposit value in case of variation in contract value upto the lower limit specified in Quantity variation clause. In case of reduction of contract value beyond the lower limit specified in Quantity Variation clause, then the Security Deposit shall be re adjusted in proportion.
- iii) In case of reduction, the reduced Contract value shall be certified by BHEL Construction Manager after ascertaining / freezing of BOQ / Drawings from the Design / Engineering Centre. The reduced Security Deposit value can only be considered after taking into account the adequacy of the securities held by BHEL to meet the liabilities of the contractor for the contract, and the performance of the contract in general. In such cases, the revised value of Security Deposit shall be worked out only after execution of not less than the lower limit of the revised scope of work/contract value as per quantity variation clause, and as certified by Construction Manager. This reduction in value of Security Deposit shall not entitle the contractor to any amendment of Contract and shall be operated at the discretion of BHEL
- iv) Contract value for the purpose of operating the reduced/increased value of Security Deposit due to Quantity Variation, shall be exclusive of Price Variation Clause, Over Run Compensation and Extra works done on manday rates.

1.10.6 The validity of Bank Guarantees towards Security Deposit shall be initially upto the completion period as stipulated in the Letter of Intent/Award + 3 months, and the same shall be kept valid by proper renewal till the acceptance of Final Bills of the Contractor, by BHEL

1.10.7 BHEL reserves the right of forfeiture of Security Deposit in addition to other claims and penalties in the event of the Contractor's failure to fulfill any of the contractual obligations or in the event of termination of contract as per terms and conditions of contract. BHEL reserves the right to set off the Security Deposit against any claims of other contracts with BHEL.

1.11 RETURN OF SECURITY DEPOSIT

Security Deposit shall be refunded/Bank Guarantee(s) released to the Contractor along with the 'Final Bill' after deducting all expenses / other amounts due to BHEL under the contract / other contracts entered into with them by BHEL.

1.12 BANK GUARANTEES

Where ever Bank Guarantees are to be furnished/submitted by the contractor, the following shall be complied with

- i) Bank Guarantees shall be from Scheduled Banks / Public Financial Institutions as defined in the Companies Act.
- ii) The Bank Guarantees shall be as per prescribed formats.
- iii) It is the responsibility of the bidder to get the Bank Guarantees revalidated/extended for the required period (subject to a minimum period of six months), as per the advice of BHEL Site Engineer / Construction Manager. BHEL shall not be liable for issue of any reminders regarding expiry of the

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 9 OF 30

Bank Guarantees.

- iv) In case extension/further extensions of any Bank Guarantees are not required, the bidders shall ensure that the same is explicitly endorsed by the Construction Manager and submitted to the Regional HQ issuing the LOI/LOA.
- v) In case the Bank Guarantees are not extended before the expiry date, BHEL reserves the right to invoke the same by informing the concerned Bank in writing, without any advance notice/communication to the concerned bidder.
- vi) Bidders to note that any corrections to Bank Guarantees shall be done by the issuing Bank, only through an amendment in an appropriate non judicial stamp paper.
- vii) The Original Bank Guarantee shall be sent directly by the Bank to BHEL under Registered Post (Acknowledgement Due), addressed to the Subcontracting Department of the respective Region.

1.13 VALIDITY OF OFFER

The rates in the Tender shall be kept open for acceptance for a minimum period of SIX MONTHS from latest due date of offer submission (including extension, if any) . In case BHEL (Bharat Heavy Electricals Ltd) calls for negotiations, such negotiations shall not amount to cancellation or withdrawal of the original offer which shall be binding on the tenderers.

1.14 EXECUTION OF CONTRACT AGREEMENT

The successful tenderer's responsibility under this contract commences from the date of issue of the Letter of Intent by Bharat Heavy Electricals Limited. The Tenderer shall submit an unqualified acceptance to the Letter of Intent/Award within the period stipulated therein.

The successful tenderer shall be required to execute an agreement in the prescribed form, with BHEL, within a reasonable time after the acceptance of the Letter of Intent/Award, and in any case before releasing the first running bill. The contract agreement shall be signed by a person duly authorized/empowered by the tenderer. The expenses for preparation of agreement document shall be borne by BHEL.

1.15 REJECTION OF TENDER AND OTHER CONDITIONS

1.15.1 The acceptance of tender will rest with BHEL which does not bind itself to accept the lowest tender or any tender and reserves to itself full rights for the following without assigning any reasons whatsoever:-

- a. To reject any or all of the tenders.
- b. To split up the work amongst two or more tenderers as per NIT
- c. To award the work in part if specified in NIT
- d. In case of either of the contingencies stated in (b) and (c) above, the time for completion as stipulated in the tender shall be applicable.

1.15.2 Conditional tenders, unsolicited tenders, tenders which are incomplete or not in the form specified or defective or have been materially altered or not in accordance with the tender

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 10 OF 30

conditions, specifications etc., are liable to be rejected.

- 1.15.3 Tenders are liable to be rejected in case of unsatisfactory performance of the tenderer with BHEL, or tenderer under suspension (hold/banning /delisted) by any unit / region / division of BHEL or tenderers who do not comply with the latest guidelines of Ministry/Commissions of Govt of India. BHEL reserves the right to reject a bidder in case it is observed that they are overloaded and may not be in a position to execute this job as per the required schedule in line with clause no. 9.0 of the 'NIT'. The decision of BHEL will be final in this regard.
- 1.15.4 If a tenderer who is a proprietor expires after the submission of his tender or after the acceptance of his tender, BHEL may at their discretion, cancel such tender. If a partner of a firm expires after the submission of tender or after the acceptance of the tender, BHEL may then cancel such tender at their discretion, unless the firm retains its character.
- 1.15.5 BHEL will not be bound by any Power of Attorney granted by changes in the composition of the firm made subsequent to the execution of the contract. They may, however, recognise such power of Attorney and changes after obtaining proper legal advice, the cost of which will be chargeable to the contractor concerned.
- 1.15.6 If the tenderer deliberately gives wrong information in his tender, BHEL reserves the right to reject such tender at any stage or to cancel the contract if awarded and forfeit the Earnest Money/Security Deposit/any other money due.
- 1.15.7 Canvassing in any form in connection with the tenders submitted by the Tenderer shall make his offer liable to rejection.
- 1.15.8 In case the Proprietor, Partner or Director of the Company/Firm submitting the Tender, has any relative or relation employed in BHEL, the authority inviting the Tender shall be informed of the fact as per specified format, along with the Offer. Failing to do so, BHEL may, at its sole discretion, reject the tender or cancel the contract and forfeit the Earnest Money/Security Deposit.
- 1.15.9 The successful tenderer should not sub-contract part or complete work detailed in the tender specification undertaken by him without written permission of BHEL's Construction Manager/Site Incharge. The tenderer is solely responsible to BHEL for the work awarded to him.
- 1.15.10 The Tender submitted by a techno commercially qualified tenderer shall become the property of BHEL who shall be under no obligation to return the same to the bidder. However unopened price bids and late tenders shall be returned to the bidders
- 1.15.11 Unsolicited discount received after the due date and time of Bid Submission shall not be considered for evaluation. However, if the party who has submitted the unsolicited discount/rebate becomes the L-I party, then the awarded price i.e contract value shall be worked out after considering the discount so offered.
- 1.15.12 BHEL shall not be liable for any expenses incurred by the bidder in the preparation of the tender irrespective of whether the tender is accepted or not.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 11 OF 30

CHAPTER-2

2.1 DEFINITION: The following terms shall have the meaning hereby assigned to them except where the context otherwise requires

i)	BHEL shall mean Bharat Heavy Electricals Limited (of the respective Power Sector Region inviting the Tender), a company registered under Indian Companies Act 1956, with its Registered Office at BHEL HOUSE, SIRI FORT, NEW DELHI – 110 049, or its Power Sector Regional Offices or its Authorised Officers or its Site Engineers or other employees authorised to deal with any matters with which these persons are concerned on its behalf.
ii)	“EXECUTIVE DIRECTOR” or ‘GROUP GENERAL MANAGER’ or “GENERAL MANAGER (Incharge)” or “GENERAL MANAGER” shall mean the Officer in Administrative charge of the respective Power Sector Region.
iii)	“COMPETENT AUTHORITY” shall mean Executive Director or Group General Manager or General Manager (Incharge) or General Manager or BHEL Officers who are empowered to act on behalf of the Executive Director or General Manager (Incharge) or General Manager of BHEL.
iv)	“ENGINEER” or “ENGINEER IN CHARGE” shall mean an Officer of BHEL as may be duly appointed and authorized by BHEL to act as “Engineer” on his behalf for the purpose of the Contract, to perform the duty set forth in this General Conditions of Contract and other Contract documents. The term also includes ‘CONSTRUCTION MANAGER’ or ‘SITE INCHARGE’ as well as Officers at Site or at the Headquarters of the respective Power Sector Regions.
v)	“SITE” shall mean the places or place at which the plants/equipments are to be erected and services are to be performed as per the specification of this Tender.
vi)	“CLIENT OF BHEL” or “CUSTOMER” shall mean the project authorities with whom BHEL has entered into a contract for supply of equipments or provision of services.
vii)	“CONTRACTOR” shall mean the successful Bidder/Tenderer who is awarded the Contract and shall include the Contractor’s successors, heirs, executors, administrators and permitted assigns.
viii)	“CONTRACT” or “CONTRACT DOCUMENT” shall mean and include the Agreement of Work Order, the accepted appendices of Rates, Schedules, Quantities if any, General Conditions of Contract, Special Conditions of Contract, Instructions to the Tenderers, Drawings, Technical Specifications, the Special Specifications if any, the Tender documents, subsequent amendments mutually agreed upon and the Letter of Intent/Acceptance issued by BHEL. Any conditions or terms stipulated by the contractor in the tender documents or subsequent letters shall not form part of the contract unless, specifically accepted in writing by BHEL in the Letter of Intent/Award and incorporated in the agreement.
ix)	“GENERAL CONDITIONS OF CONTRACT” shall mean the ‘Instructions to Tenderers’ and ‘General Conditions of Contract’ pertaining to the work for which above tenders have been called for.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 12 OF 30

x)	“TENDER SPECIFICATION” or “TENDER” or “TENDER DOCUMENTS” shall mean General Conditions, Common Conditions, Special Conditions, Price Bid, Rate Schedule, Technical Specifications, Appendices, Annexures, Corrigendums, Amendments, Forms, procedures, Site information, etc and drawings/documents pertaining to the work for which the tenderers are required to submit their offers. Individual specification number will be assigned to each Tender Specification.
xi)	“LETTER OF INTENT” shall mean the intimation by a Letter/Fax/email to the tenderer that the tender has been accepted in accordance with provisions contained in the letter. The responsibility of the contractor commences from the date of issue of this letter and all terms and conditions of the contract are applicable from this date.
xii)	“COMPLETION TIME” shall mean the period by ‘date/month’ specified in the ‘Letter of Intent/Award’ or date mutually agreed upon for handing over of the intended scope of work, the erected equipment/plant which are found acceptable by the Engineer, being of required standard and conforming to the specifications of the Contract.
xiii)	“PLANT” shall mean and connote the entire assembly of the plant and equipments covered by the contract.
xiv)	“EQUIPMENT” shall mean equipment, machineries, materials, structural, electricals and other components of the plant covered by the contract.
xv)	“TESTS” shall mean and include such test or tests to be carried out on the part of the contractor as are prescribed in the contract or considered necessary by BHEL, in order to ascertain the quality, workmanship, performance and efficiency of the contractor or part thereof.
xvi)	“APPROVED”, “DIRECTED” or “INSTRUCTED” shall mean approved, directed or instructed by BHEL.
xvii)	“WORK or CONTRACT WORK” shall mean and include supply of all categories of labour, specified consumables, tools and tackles and Plants required for complete and satisfactory site transportation, handling, stacking, storing, erecting, testing and commissioning of the equipments to the entire satisfaction of BHEL.
xviii)	“SINGULAR AND PLURALS ETC” words carrying singular number shall also include plural and vice versa, where the context so requires. Words imparting the masculine Gender shall be taken to include the feminine Gender and words imparting persons shall include any Company or Associations or Body of Individuals, whether incorporated or not.
xix)	“HEADING” – The heading in these General Conditions are solely for the purpose of facilitating reference and shall not be deemed to be part thereof or be taken as instructions thereof or of the contract.
xx)	“MONTH” shall mean calendar month unless otherwise specified in the Tender.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 13 OF 30

xxi)	Day' or 'Days' unless herein otherwise expressly defined shall mean calendar day or days of twenty four (24) hours each. A week shall mean continuous period of seven (7) days.
xxii)	"COMMISSIONING" shall mean the synchronisation testing and achieving functional operation of the Equipment with associated system after all initial adjustments, trials, cleaning, re-assembly required at site if any, have been completed and Equipment with associated system is ready for taking into service.
xxiii)	"WRITING" shall include any manuscript type written or hand written or printed statement or electronically transmitted messages, under the signature or seal or transmittal of BHEL.
xxiv)	"TEMPORARY WORK" shall mean all temporary works for every kind required in or for the execution, completion, maintenance of the work.
xxv)	'CONTRACT PRICE' or 'CONTRACT VALUE' shall mean the sum mentioned in the LOI/LOA/Contract Agreement subject to such additions thereto or deductions there from as may be made under provisions hereinafter contained
xxvi)	"COMMENCEMENT DATE" or "START DATE" shall mean the commencement/start of work at Site as per terms defined in the Tenderl
xxvii)	"SHORT CLOSING" or "FORE CLOSING" of Contract shall mean the premature closing of Contract, for reasons not attributable to the contractor and mutually agreed between BHEL and the contractor
xxviii)	"TERMINATION" of Contract shall mean the pre mature closing of contract due to reasons as mentioned in the contract
xxix)	"DE MOBILISATION" shall mean the temporary winding up of Site establishment by Contractor leading to suspension of works temporarily for reasons not attributable to the contractor
xxx)	"RE MOBILISATION" shall mean the resumption of work with all resources required for the work after demobilization.
2.2	LAW GOVERNING THE CONTRACT AND COURT JURISDICTION The contract shall be governed by the Law for the time being in force in the Republic of India. The Civil Court having original Civil Jurisdiction at Delhi for PSNR, at Kolkata for PSER, at Nagpur for PSWR and at Chennai for PSSR, shall alone have exclusive jurisdiction in regard to all claims in respect of the Contract. No other Civil Court shall have jurisdiction in case of any dispute, under this contract
2.3	ISSUE OF NOTICE 2.3.1 <u>Service of notice on contractor</u> Any notice to be given to the Contractor under the terms of the contract shall be served by sending the same by Registered Post / Speed Post to or leaving the same at the Contractor's last known address of the principal place of business (or in the event of the contractor being a company, to or at its Registered Office). In case of change of address, the notice shall be served at changed address as notified in writing by the Contractor to BHEL. Such posting or leaving of the notice shall be deemed to be good service of such notice and the time mentioned to the condition for doing any act after notice shall be reckoned from the date so mentioned in such notice.
2.3.2	<u>Service of notice on BHEL</u>

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 14 OF 30

Any notice to be given to BHEL in-charge/Region under the terms of the Contract shall be served by sending the same by post to or leaving the same at BHEL address or changed address as notified in writing by BHEL to the Contractor.		
2.4	USE OF LAND No land belonging to BHEL or their Customer under temporary possession of BHEL shall be occupied by the contractor without written permission of BHEL.	
2.5	COMMENCEMENT OF WORK	
2.5.1	The contractor shall commence the work as per the time indicated in the Letter of Intent from BHEL and shall proceed with the same with due expedition without delay.	
2.5.2	If the contractor fails to start the work within stipulated time as per LOI or as intimated by BHEL, then BHEL at its sole discretion will have the right to cancel the contract. The Earnest Money and/or Security Deposit with BHEL will stand forfeited without any further reference to him without prejudice to any and all of BHEL's other rights and remedies in this regard.	
2.5.3	All the work shall be carried out under the direction and to the satisfaction of BHEL.	
2.6	MEASUREMENT OF WORK AND MODE OF PAYMENT:	
2.6.1	All payments due to the contractors shall be made by e mode only, unless otherwise found operationally difficult for reasons to be recorded in writing	
2.6.2	For progress running bill payments: - The Contractor shall present detailed measurement sheets in triplicate, duly indicating all relevant details based on technical documents and connected drawings for work done during the month/period under various categories in line with terms of payment as per contract. The basis of arriving at the quantities, weights shall be relevant documents and drawings released by BHEL. These measurement sheets shall be prepared jointly with BHEL Engineers and signed by both the parties.	
2.6.3	These measurement sheets will be checked by BHEL Engineer and quantities and percentage eligible for payment under various groups shall be decided by BHEL Engineer. The abstract of quantities and percentage so arrived at based on the terms of payment shall be entered in Measurement Book and signed by both the parties.	
2.6.4	Based on the above quantities, contractor shall prepare the bills in prescribed format and work out the financial value. These will be entered in Measurement Book and signed by both the parties. Payment shall be made by BHEL after effecting the recoveries due from the contractor.	
2.6.5	All recoveries due from the contractor for the month/period shall be effected in full from the corresponding running bills unless specific approval from the competent authorities is obtained to the contrary.	
2.6.6	Measurement shall be restricted to that portion of work for which it is required to ascertain the financial liability of BHEL under this contract.	

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 15 OF 30

- 2.6.7 The measurement shall be taken jointly by persons duly authorized on the part of BHEL and by the Contractor.
- 2.6.8 The Contractor shall bear the expenditure involved if any, in making the measurements and testing of materials to be used/used in the work. The contractor shall, without extra charges, provide all the assistance with appliances and other things necessary for measurement.
- 2.6.9 If at any time due to any reason whatsoever, it becomes necessary to re-measure the work done in full or in part, the expenses towards such re measurements shall be borne by the contractor unless such re measurements are warranted solely for reasons not attributable to contractor.
- 2.6.10 Passing of bills covered by such measurements does not amount to acceptance of the completion of the work measured. Any left out work has to be completed, if pointed out at a later date by BHEL.
- 2.6.11 Final measurement bill shall be prepared in the final bill format prescribed for the purpose based on the certificate issued by BHEL Engineer that entire works as stipulated in tender specification has been completed in all respects to the entire satisfaction of BHEL. Contractor shall give unqualified "No Claim" Certificate. All the tools and tackles loaned to him should be returned in satisfactory condition to BHEL. The abstract of final quantities and financial values shall also be entered in the Measurement Books and signed by both parties to the contract. The Final Bill shall be prepared and paid within a reasonable time after completion of work.
- 2.7 **RIGHTS OF BHEL**
BHEL reserves the following rights in respect of this contract during the original contract period or its extensions if any, as per the provisions of the contract, without entitling the contractor for any compensation.
- 2.7.1 To withdraw any portion of work and/or to restrict/alter quantum of work as indicated in the contract during the progress of work and get it done through other agencies to suit BHEL's commitment to its customer or in case BHEL decides to advance the date of completion due to other emergent reasons/ BHEL's obligation to its customer.
- 2.7.2 To terminate the contract or get any part of the work done through other agency or deploy BHEL's own/hired/otherwise arranged resources , at the risk and cost of the contractor after due notice of a period of two weeks by BHEL, in the event of:-
- i) Contractor's continued poor progress
 - ii) Withdrawal from or abandonment of the work before completion of the work
 - iii) Contractor's inability to progress the work for completion as stipulated in the contract
 - iv) Poor quality of work
 - v) Corrupt act of Contractor
 - vi) Insolvency of the Contractor
 - vii) Persistent disregard to the instructions of BHEL
 - viii) Assignment, transfer, sub-letting of contract without BHEL's written permission
 - ix) Non fulfillment of any contractual obligations
 - x) In the opinion of BHEL, the contractor is overloaded and is not in a position to execute the job as per required schedule

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 16 OF 30

- 2.7.3 To meet the expenses including BHEL overheads on the differential cost at 5%, over and above the Liquidated damages/penalties arising out of "Risk & Cost" as explained above under Sl.No. 2.7.2. BHEL shall recover the amount from any money due from Contractor, or from any money due to the Contractor including Security Deposit, or by forfeiting any T&P or material of the contractor under this contract or any other contract of BHEL or by any other means or any combination thereof
- 2.7.4 To terminate the contract or to restrict the quantum of work and pay for the portion of work executed in case BHEL's contract with their customer are terminated for any reason, as per mutual agreement.
- 2.7.5 To effect recovery from any amounts due to the contractor under this or any other contract or in any other form, the moneys BHEL is statutorily forced to pay to anybody, due to contractor's failure to fulfill any of his obligations. BHEL shall levy overheads of 5% on all such payments along with interest as defined elsewhere in the GCC.
- 2.7.6 While every endeavour will be made by BHEL to this end, they cannot guarantee uninterrupted work due to conditions beyond their control. The Contractor will not be normally entitled for any compensation/extra payment on this account unless otherwise specified elsewhere in the contract.
- 2.7.7 In case the execution of works comes to a complete halt or reaches a stage wherein worthwhile works cannot be executed and there is no possibility of commencement of work for a period of not less than two months, due to reasons not attributable to the contractor and other than Force Majeure conditions, BHEL may consider permitting the contractor to de mobilize forthwith and re mobilize at an agreed future date. Cost of such demobilization/remobilization shall be mutually agreed. ORC in such cases shall not be applicable for the period between the period of demobilization and re mobilisation. The duration of contract/time extension shall accordingly get modified suitably. In case of any conflict, BHEL decision in this regard shall be final and binding on the contractor.
- 2.7.8 In the unforeseen event of inordinate delay in receipt of materials, drawings, fronts, etc, due to which inordinate discontinuity of work is anticipated, BHEL at its discretion may consider contractor's request to short close the contract in following cases:
- The balance works (including but not limited to Trial Operation, PG Test, etc) are minor vis a vis the scope of work envisaged as per the contract.
 - There has been no significant work in past 6 months OR no significant work is expected in next 6 months (example in Hydro projects or in projects where work has stopped due to reasons beyond the control of BHEL)
 - The balance works cannot be done within a reasonable period of time as they are dependent on unit shutdown or on other facilities of customer or any other reasons not attributable to the contractor

At the point of requesting for short closure, contractor shall establish that he has completed all works possible of completion and he is not able to proceed with the balance works due to constraints beyond his control. In such a case, the estimated value of the unexecuted portion of work (or estimated value of services to be provided for carrying out milestone/stage payments like

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 17 OF 30

	Trial Operation/PG Test, etc) as mutually agreed, shall however be reduced from the final contract value. 2.7.9 LIQUIDATED DAMAGES/PENALTY If the contractor fails to maintain the required progress of work which results in delay in the completion of the work as per the contractual completion period, BHEL shall have the right to impose Liquidated Damage/Penalty at the rate of 0. 5% of the contract value, per week of delay or part thereof subject to a maximum of 10% of the contract value. For this purpose, the period of delay shall be the delay attributable to the Contractor for the completion of work as per contract. Contract Value for this purpose, shall be the final executed value exclusive of ORC, Extra Works executed on Manday rate basis, Supplementary/Additional Items and PVC.
2.8	RESPONSIBILITIES OF THE CONTRACTOR IN RESPECT OF LOCAL LAWS, EMPLOYMENT OF WORKERS ETC. The following are the responsibilities of the contractor in respect of observance of local laws, employment of personnel, payment of taxes etc. The subcontractor shall fully indemnify BHEL against any claims of whatsoever nature arising due to the failure of the contractor in discharging any of his responsibilities hereunder: 2.8.1 As far as possible, Unskilled Workers shall be engaged from the local areas in which the work is being executed. 2.8.2 The contractor at all times during the continuance of this contract shall, in all his dealings with local labour for the time being employed on or in connection with the work, have due regard to all local festivals and religious and other customs. 2.8.3 The contractor shall comply with all applicable State and Central Laws, Statutory Rules, Regulations etc. such as Payment of Wages Act, Minimum Wages Act, Workmen Compensation Act, Employer's Liability Act, Industrial Disputes Act, Employers Provident Act, Employees State Insurance Scheme, Contract Labour (Regulation and Abolition) Act 1970, Payment of Bonus & Gratuity Act and other Acts, Rules and Regulations for labour as may be enacted by the Government during the tenure of the Contract and having force or jurisdiction at Site. The Contractor shall also give to the local Governing Body, Police and other relevant Authorities all such notices as may be required by the Law. 2.8.4 The contractor shall obtain independent License under the Contract Labour (Regulations and Abolition Act, 1970)as required from the concerned Authorities based on the certificate (Form-V) issued by the Principal Employer/Customer 2.8.5 The contractor shall pay all taxes, fees, license charges, deposits, duties, tolls, royalties, commission or other charges which may be leviable on account of his operations in executing the contract. 2.8.6 While BHEL would pay the inspection fees and Registration fees of Boiler/Electrical Inspectorate,

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 18 OF 30

	all other arrangements for site visits periodically by the Inspectorate to site, Inspection certificate etc. will have to be made by contractor. However, BHEL will not make any payment to the Inspectorate in connection with contractor's Welders/Electricians qualification tests etc.
2.8.7	Contractor shall be responsible for provision of Health and Sanitary arrangements (more particularly described in Contract Labour Regulation & Abolition Act), Safety precautions etc. as may be required for safe and satisfactory execution of contract.
2.8.8	The contractor shall be responsible for proper accommodation including adequate medical facilities for personnel employed by him.
2.8.9	The contractor shall be responsible for the proper behavior and observance of all regulations by the staff employed by him.
2.8.10	The contractor shall ensure that no damage is caused to any person/property of other parties working at site. If any such damage is caused, it is responsibility of the contractor to make good the losses or compensate for the same.
2.8.11	All the properties/equipments/components of BHEL/their Client loaned with or without deposit to the contractor in connection with the contract shall remain properties of BHEL/their Client.
2.8.12	The contractor shall use such properties for the purpose of execution of this contract. All such properties/equipments/components shall be deemed to be in good condition when received by the contractor unless he notifies within 48 hours to the contrary. The contractor shall return them in good condition as and when required by BHEL/their Client. In case of non-return, loss, damage, repairs etc, the cost thereof as may be fixed by BHEL Engineer will be recovered from the contractor
2.8.13	In case the contractor is required to undertake any work outside the scope of this contract, the rates payable shall be those mutually agreed upon if the item rates are not mentioned in existing contract
2.8.14	Any delay in completion of works/or non achievement of periodical targets due to the reasons attributable to the contractor, the same may have to be compensated by the contractor either by increasing manpower and resources or by working extra hours and/or by working more than one shift. All these are to be carried out by the contractor at no extra cost.
2.8.15	The contractor shall arrange, coordinate his work in such a manner as to cause no hindrance to other agencies working in the same premises.
2.8.16	All safety rules and codes applied by the Client/BHEL at site shall be observed by the contractor without exception. The contractor shall be responsible for the safety of the equipment/material and works to be performed by him and shall maintain all light, fencing guards, slings etc. or other protection necessary for the purpose. Contractor shall also take such additional precautions as may be indicated from time to time by the Engineer with a view to prevent pilferage, accidents, fire hazards. Due precautions shall be taken against fire hazards and atmospheric conditions. Suitable number of Clerical staff, watch and ward, store keepers to take care of equipment/materials and construction tools and tackles shall be posted at site by the contractor till the completion of work

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 19 OF 30

under this contract.

The contractor shall arrange for such safety devices as are necessary for such type of work and carry out the requisite site tests of handling equipment, lifting tools, tackles etc. as per prescribed standards and practices.

Contractor has to ensure the implementation of Health, Safety and Environment (HSE) requirements as per directions given by BHEL/Customer. The contractor has to assist in HSE audit by BHEL/Customer and submit compliance Report. The contractor has to generate and submit record/reports as per HSE plan/activities as per instruction of BHEL/Customer

- 2.8.17 The contractor will be directly responsible for payment of wages to his workmen. A pay roll sheet giving all the payments given to the workers and duly signed by the contractor's representative should be furnished to BHEL site for record purpose, if so called for.
- 2.8.18 In case of any class of work for which there is no such specification as laid down in the contract, such work shall be carried out in accordance with the instructions and requirements of the Engineer.
- 2.8.19 Also, no idle charges will be admissible in the event of any stoppage caused in the work resulting in contractor's labour and Tools & Plants being rendered idle due to any reason at any time.
- 2.8.20 The contractor shall take all reasonable care to protect the materials and work till such time the plant/equipment has been taken over by BHEL or their Client whichever is earlier.
- 2.8.21 The contractor shall not stop the work or abandon the site for whatsoever reason of dispute, excepting force majeure conditions. All such problems/disputes shall be separately discussed and settled without affecting the progress of work. Such stoppage or abandonment shall be treated as breach of contract and dealt with accordingly
- 2.8.22 The contractor shall keep the area of work clean and shall remove the debris etc. while executing day-to-day work. Upon completion of work, the contractor shall remove from the vicinity of work, all scrap, packing materials, rubbish, unused and other materials and deposit them in places specified by the Engineer. The contractor will also demolish all the hutments, sheds, offices, etc. constructed and used by him and shall clean the debris. In the event of his failure to do so, the same will be arranged to be done by the Engineer and the expenses recovered from the contractor.
- 2.8.23 The contractor shall execute the work in the most substantial and workman like manner in the stipulated time. Accuracy of work and timely execution shall be the essence of this contract. The contractor shall be responsible to ensure that the quality, assembly and workmanship conform to the dimensions and clearance given in the drawings and/ or as per the instructions of the Engineer.
- 2.8.24 The Contractor to note that some of BHEL's T&Ps/MMDs may not be insured. The Contractor will take necessary precautions and due care to protect the same while in his custody from any damage/ loss till the same is handed over back to BHEL. In case the damage / loss is due to carelessness/ negligence on the part of the contractor, the Contractor is liable to get them repair/

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 20 OF 30

replaced immediately and in case of his failure to do so within a reasonable time, BHEL will reserve the right to recover the loss from the contractor.	
2.9	PROGRESS MONITORING, MONTHLY REVIEW AND PERFORMANCE EVALUATION
2.9.1	A detailed plan/programme for completion of the contractual scope of work as per the time schedule given in the contract shall be jointly agreed between BHEL and Contractor, before commencement of work . The above programme shall be supported by monthwise deployment of resources viz Manpower, T&P, Consumables, etc. Progress will be reviewed periodically (Daily/Weekly/Monthly) vis a vis this jointly agreed programme. The Contractor shall submit periodical progress reports (Daily/Weekly/Monthly) and other reports/information including manpower, consumables, T&P mobilization etc as desired by BHEL.
2.9.2	Monthly progress review between BHEL and Contractor shall be based on the agreed programme as above, availability of inputs/fronts etc, and constraints if any, as per prescribed formats. Manpower, T&P and consumable reports as per prescribed formats shall be submitted by contractor every month. Release of RA Bills shall be contingent upon certification by BHEL Site Engineer of the availability of the above prescribed formats duly filled in and signed.
2.9.3	The burden of proof that the causes leading to any shortfall is not due to any reasons attributable to the contractor is on the contractor himself. The monthly progress review shall record shortfalls attributable to (i) Contractor, (ii) Force Majeure Conditions, and (iii) BHEL
2.9.4	Performance of the Contractor shall be assessed as per prescribed formats and shall form the basis for 'Annual/Overall Performance Evaluation' of the Contractor and also for 'Assessment of Capacity of Bidder' for Tenders where the Contractor is a bidder. BHEL reserves the right to revise the evaluation formats during the course of execution of the works
2.10	TIME OF COMPLETION
2.10.1	The time schedule shall be as prescribed in the Contract. The time for completion shall be reckoned from the date of commencement of work at Site as certified by BHEL Engineers
2.10.2	The entire work shall be completed by the contractor within the time schedule or within such extended periods of time as may be allowed by BHEL under clause 2.11
2.11	EXTENSION OF TIME FOR COMPLETION
2.11.1	If the completion of work as detailed in the scope of work gets delayed beyond the contract period, the contractor shall request for an extension of the contract and BHEL at its discretion may extend the Contract.
2.11.2	Based on the monthly reviews jointly signed, the works balance at the end of original contract period less the backlog attributable to the contractor shall be quantified, and the number of months of 'Time extension' required for completion of the same shall be jointly worked out. Within this period of 'Time extension', the contractor is bound to complete the portion of backlog attributable to the contractor. Any further 'Time extension' or 'Time extensions' at the end of the previous extension shall be worked out similarly.
2.11.3	However if any 'Time extension' is granted to the contractor to facilitate continuation of work and completion of contract, due to backlog attributable to the contractor alone, then it shall be without prejudice to the rights of BHEL to impose penalty/LD for the delays attributable to the contractor, in addition to any other actions BHEL may wish to take at the risk and cost of contractor.
2.11.4	A joint programme shall be drawn for the balance amount of work to be completed during the period of 'Time Extension', along with matching resources (with weightages) to be deployed by the contractor as per specified format. Review of the programme and record of shortfall shall be done

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 21 OF 30

every month of the 'Time extension' period in the same manner as is done for the regular contract period.	
2.11.5	During the period of 'Time extension', contractor shall maintain their resources as per mutually agreed program
2.11.6	At the end of total work completion as certified by BHEL Engineer, and upon analysis of the total delay, the portion of time extensions attributable to (i) Contractor, (ii) Force majeure conditions, and (iii) BHEL, shall be worked out and shall be considered to be exhausted in the same order. The total period of time extensions shall be the sum of (i), (ii) and (iii) above and shall be equal to period between the scheduled date of completion and the actual date of completion of contract. LD shall be imposed/levied for the portion of time extensions attributable to contractor and recoverable from the dues payable to the contractor.
2.12	OVERRUN COMPENSATION
2.12.1	Over Run Compensation (ORC) is payable for works done during the extension period, by way of rate revisions for periods beyond original contract period subject to the following terms and conditions.
2.12.2	Rates shall be increased by 10% for the first twelve months of one or more extensions beyond original contract period. For the next twelve months of further extensions if any, rates shall be increased as above by 10% over the previous twelve months, and similarly for each subsequent twelve months extension.
2.12.3	The amount of increase payable per month due to rate revisions is subject to a minimum of Rs 1,00,000/- per month and a maximum of Rs 10,00,000/- per month.
2.12.4	Should there be any 'Time extension' for reasons attributable only to the contractor, then the work shall be executed by the contractor at the rates applicable for the period the work was planned
2.12.5	Payment of ORC shall be regulated as follows: i) Contractor is entitled to Over Run Compensation (ORC) only for the portion of backlog attributable to BHEL. ii) 50% of the compensation as per clause 2.12.3 is allocated for deployment of resources agreed as per the joint programme drawn vide 2.11.4. Payment shall however be based on the actual deployment of resources for the month as certified by BHEL, as per weightages assigned therein iii) 50% of the compensation as per clause 2.12.3, is allocated for achieving of planned progress agreed as per the joint programme drawn vide 2.11.4. Payment shall be on pro rata basis for actual achieved quantities iv) Total Over Run Compensation shall be limited to 10% of the executed contract value as certified in Final Bill. For this purpose executed contract value excludes PVC, ORC, Supplementary/Additional Items and Extra Works done on Manday rate basis
2.12.6	Contractor shall not be entitled for any Over Run Compensation (ORC) for the portion of backlog attributable to the contractor. Such works shall be executed at the rates applicable for the period the work was planned
2.13	INTEREST BEARING RECOVERABLE ADVANCES
2.13.1	Normally no advance is payable to the contractor. However, advance payment in exceptional circumstances shall be interest bearing and secured through a Bank Guarantee and shall be limited to a maximum of 5% of contract value. This 'Interest Bearing Recoverable Advance' shall be

Bharat Heavy Electricals Limited		
Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 22 OF 30

payable in not less than two installments with any of the installment not exceeding 60% of the total eligible advance.	
2.13.2	In exceptional circumstances, with due justification, Competent Authority of BHEL is empowered to approve proposals for payment of additional interim interest bearing advance against Bank Guarantee, for resource augmentation towards expediting work for project implementation.
2.13.3	Bank Guarantee towards 'Interest Bearing Recoverable Advance' shall be atleast 110% of the advance so as to enable recovery of not only principle amount but also the interest portion, if so required.
2.13.4	Contractor shall establish the utilization of advance drawn before the release of next installment.
2.13.5	Payment and recovery of Interest Bearing Recoverable advance shall be at the sole discretion of BHEL and shall not be a subject matter of arbitration.
2.13.6	The rate of interest applicable for the above advances shall be the prime lending rate of State Bank of India prevailing at the time of disbursement of the advance + 2%, and such rate will remain fixed till the total advance amount is recovered
2.13.7	Unadjusted amount of advances paid shall not exceed 5% of the total contract value at any point of time. Recovery of advances shall be made progressively from each Running Bill such that the advance amounts paid along with the interest is fully recovered by the time the contractor's billing reaches 80% of contract value.
2.13.8	Recovery rate per month shall be the sum of: a. Not less than 10% of Running Bill amount b. Simple interest up to the date of RA Bill on the outstanding Principle amount/amounts
2.13.9	Contractor to submit Bank Guarantee as per prescribed formats for each of the advance and shall be valid for at least one year or the recovery duration or the balance contract period which ever is later. In case the recovery of dues does not get completed within the aforesaid BG period, the contractor shall renew the BG or submit fresh BG for the outstanding amount and the remaining recovery period.
2.13.10	BHEL is entitled to make recovery of the entire outstanding amount in case the contractor fails to comply with the BG requirement
2.14	QUANTITY VARIATION
2.14.1	The quoted rates shall remain firm irrespective of any variations in the individual quantities. No compensation becomes payable in case the variation of the final executed contract value is within the limits of Plus (+) or Minus (-) 15% of awarded contract value
2.14.2	Compensation due to variation of final executed value in excess of the limits defined in clause above, shall be as follows: i) In case the finally executed contract value reduces below the lower limit of Contract Value due to quantity variation specified above, the contractor will be eligible for compensation @ 15% of the difference between the lower limit of the contract value and the actual executed value. ii) In case the finally executed contract value increases above the upper limit of Contract Value

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 23 OF 30

due to quantity variation specified above, there will be no revision in the rates within the contract period.

2.15 EXTRA WORKS

- 2.15.1 All rectifications/modifications, revamping, and reworks required for any reasons not due to the fault of the contractor, or needed due to any change in deviation from drawings and design of equipments, operation/maintenance requirements, mismatching, or due to damages in transit, storage and erection/commissioning, and other allied works which are not very specifically indicated in the drawings, but are found essential for satisfactory completion of the work, will be considered as extra works.
- 2.15.2 Extra works arising on account of the contractor's fault, irrespective of time consumed in rectification of the damage/loss, will have to be carried out by the contractor free of cost. Under such circumstances, any material and consumable required for this purpose will also have to be arranged by the contractor at his cost.
- 2.15.3 All the extra work should be carried out by a separately identifiable gang, without affecting routine activities. Daily log sheets in the pro-forma prescribed by BHEL should be maintained and shall be signed by the contractor's representative and BHEL engineer. No claim for extra work will be considered/entertained in the absence of the said supporting documents i.e. daily log sheets. Signing of log sheets by BHEL engineer does not necessarily mean the acceptance of such works as extra works.
- 2.15.4 BHEL retains the right to award or not to award any of the major repair/rework/modification/rectification/fabrication works to the contractor, at their discretion without assigning any reason for the same
- 2.15.5 After eligibility of extra works is established and finally accepted by BHEL engineer/designer, payment will be released on competent authority's approval at the following rate.
- MAN-HOUR RATE FOR ELIGIBLE EXTRA WORKS:** Single composite average labour man-hour rate, including overtime if any, supervision, use of tools and tackles and other site expenses and incidentals, consumables for carrying out any major rework/repairs/rectification/modification/fabrication as certified by site as may arise during the course of erection, testing, commissioning or extra works arising out of transit, storage and erection damages, payment, if found due will be at Rs 60/- per man hour.
- 2.15.6 The above composite labour man hour rate towards extra works shall remain firm and not subject to any variation during execution of the work. PVC will not be applicable for extra works. Rate revision, Over Run Charges/compensation etc will not be applicable due to extra works.
- 2.15.7 **Extra Works for Civil Packages** shall be regulated as follows
- i) **Rates for Extra Works arising due to (1) non availability of BOQ (Rate Schedule), OR (2) change in Specifications of materials/works (3) rectification/modification/dismantling & re erecting etc due to no fault of Contractor, shall be in the order of the following:**

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 24 OF 30

a) Item rates are to be derived from similar nature of items in the BOQ (Rate Schedule) with applicable escalation derived from All India Consumer Price Index for Whole Sale Commodities. b) As per CPWD-DSR-2007 (or latest edition) with applicable escalation derived from All India Consumer price Index for Whole Sale Commodities, OR, Notification issued by the office of CPWD for 'Cost Index' in that Region where the project is being executed, whichever is less c) Item rates are to be worked out on the basis of prevailing market rates mutually agreed between BHEL and Contractor, plus 15% towards Contractor's overheads and profit. ii) PVC and ORC will not applicable be for (i) above.

2.16 SUPPLEMENTARY ITEMS 2.16.1 For NON Civil Works Supplementary items are items/works required for completion of entire work but not specified in the scope of work. Subject to certification of such items/works as supplementary items by BHEL Engineer, rates shall be derived on the basis of any one of the following on mutual agreement: i) Based on percentage breakup/rates indicated for similar/nearby items ii) In case (i) above does not exist, then BHEL/site may derive the percentage breakup/rates to suit the type of work 2.16.2 For Civil Works i) <u>Rates for Supplementary Works/Additional Works arising out due to additions/alterations in the original scope of works as per contract subject to certification of BHEL Engineer shall be worked out as under:</u> a) Item rates which are available in existing BOQ (Rate Schedule) shall be operated with applicable escalation derived from All India Consumer Price Index for Whole Sale Commodities b) Items of works which are not available in existing BOQ shall be operated as an 'Extra Works' and rate shall be derived as per clause no 2.15.7 ii) Execution of Supplementary Works/Additional Works through the Contractor shall be at the sole discretion of BHEL, and shall be considered as part of executed contract value for the purpose of Quantity Variation as per clause 2.14 iii) BHEL Engineer's decision regarding fixing the rate as above is final and binding on the contractor. iv) PVC and ORC will not be applicable for (i) above.

2.17 PRICE VARIATION COMPENSATION

2.17.1 In order to take care of variation in cost of execution of work on either side, due to variation in the index of LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS, Price Variation Formula as described herein shall be applicable

2.17.2 85% component of Contract Value shall be permitted to be adjusted for variation in various relevant indices during execution of work. The remaining 15% shall be treated as fixed component

2.17.3 The basis for calculation of price variation in each category, their component, Base Index, shall be as under:

SL NO.	CATEGORY	BASE INDEX	COMPONENT ('K')		
			CIVIL PACKAGES (See Note A/B/C)	MECHANICAL PACKAGES	LABOUR ORIENTED

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 25 OF 30

			A	B**	C		PACKAGES (See Note D)
i)	LABOUR (ALL CATEGORIES)	'MONTHLY ALL-INDIA AVERAGE CONSUMER PRICE INDEX NUMBERS FOR INDUSTRIAL WORKERS' published by Labour Bureau, Ministry of Labour and Employment, Government of India. (Website: labourbureau.nic.in)	40	25	30	65	80
ii)	HIGH SPEED DIESEL OIL	Name of Commodity : HSD OIL. Type : INDIVIDUAL COMMODITY (See Note F)	5	3	5	5	5
iii)	WELDING ROD	Name of Commodity : WELDING ROD Type: INDIVIDUAL COMMODITY (See Note F)				15	
iv)	CEMENT	Name of Commodity : GREY CEMENT Type: INDIVIDUAL COMMODITY (See Note F)		20	30		
v)	STEEL (Structural and Reinforcement Steel)	Name of Commodity : a1. IRON & SEMIS Type: GROUP ITEM (See Note F)		25			
vi)	MATERIALS (Other than Cement & Steel)	Name of Commodity: ALL COMMODITIES Type: GROUP ITEM (See Note F)	40	12	20		

Note: A) Cement & Steel : Free Issue (BHEL Scope)

B) Cement & Steel : In Contractor Scope {**: unless otherwise specified in Special Conditions of Contract (SCC) }

C) Cement in Contractor Scope, and Steel is Free Issue (BHEL Scope)

D) Predominantly 'Labour Oriented' packages including Material Handling & Management, Insulation, Painting, Electrical and CI or a combination thereof, which are separately tendered and awarded

E) For Composite packages (i.e. Civil+Mechanical+Electrical/CI or Civil+Mechanical or Mechanical+Electrical/CI), the components for various categories shall be as per respective packages

F) As per the 'MONTHLY WHOLE SALE PRICE INDEX' for the respective Commodity and Type, published by Office of Economic Adviser, Ministry of Commerce and Industry, Government of India. (Website : www.eaindustry.nic.in). Revisions in the index or commodity will be re adjusted accordingly.

2.17.4 Payment/recovery due to variation in index shall be determined on the basis of the following notional formula without any initial absorption, in respect of the identified components viz LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS

$$P = K \times R \times \frac{(X_N - X_0)}{X_0}$$

Where

P = Amount to be paid/recovered due to variation in the Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

K = Percentage component applicable for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

R = Value of work done for the billing month (Excluding Taxes and Duties if payable extra)

XN = Revised Index No for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials for the billing month under consideration

Xo = Index no for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials as on the Base date.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 26 OF 30

2.17.5 Base date shall be calendar month of the latest date of submission of Tender.

2.17.6 PVC shall not be payable for the ORC amount, Supplementary/Additional Items, Extra works.

2.17.7 The contractor shall furnish necessary monthly bulletins for the necessary indices from the relevant websites along with his Bills.

2.17.8 The contractor will be required to raise the bills for price variation payments on a monthly basis along with the running bills irrespective of the fact whether any increase/decrease in the index for relevant categories has taken place or not. In case there is delay in publication of bulletins (final figure), the provisional values as published can be considered for payments and arrears shall be paid/recovered on getting the final values.

2.17.9 PVC shall be applicable for the entire original contract period plus the extended period. However the Total Quantum of Price Variation amount payable/recoverable shall be regulated as follows:

- i) For the portion of backlog attributable to the contractor, the PVC will be based on the average of the indices for the period of the original contract period.
- ii) For the period of Force Majeure, the PVC will be limited to the indices applicable at the beginning of the force majeure period.
- iii) For the portion of backlog attributable to BHEL, the PVC will be as per the indices applicable for the respective months
- iv) The total amount of PVC shall not exceed 20% of the cumulatively executed contract value. Executed contract value for this purpose is exclusive of PVC, ORC, Supplementary/Additional Items and Extra works.

2.18 INSURANCE

2.18.1 BHEL/their customer shall arrange for insuring the materials/properties of BHEL/customer covering the risks during transit, storage, erection and commissioning.

2.18.2 It is the sole responsibility of the contractor to insure his materials, equipments, workmen, etc. against accidents and injury while at work and to pay compensation, if any, to workmen as per Workmen's compensation Act. The work will be carried out in a protected area and all the rules and regulations of the client /BHEL in the area of project which are in force from time to time will have to be followed by the contractor.

2.18.3 If due to negligence and or non-observation of safety and other precautions by the contractors, any accident/injury occurs to the property / manpower belong to third party, the contractor shall have to pay necessary compensation and other expense, if so decided by the appropriate authorities.

2.18.4 The contractor will take necessary precautions and due care to protect the material, while in his custody from any damage/ loss due to theft or otherwise till the same is taken over by BHEL or customer. For lodging / processing of insurance claim the contractor will submit necessary documents. BHEL will recover the loss including the deductible franchise from the contractor, in case the damage / loss is due to carelessness / negligence on the part of the contractor. In case of any theft of material under contractor's custody, matter shall be reported to police by the contractor immediately and copy of FIR and subsequently police investigation report shall be submitted to BHEL for taking up with insurance. However this will not relieve the contractor of his

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 27 OF 30

contractual obligation for the material in his custody.	
2.19	STRIKES & LOCKOUT 2.19.1 The contractor will be fully responsible for all disputes and other issues connected with his labour. In the event of the contractor's labour resorting to strike or the Contractor resorting to lockout and if the strike or lockout declared is not settled within a period of one month, BHEL shall have the right to get the work executed through any other agencies and the cost so incurred by BHEL shall be deducted from the Contractor's bills. 2.19.2 For all purposes whatsoever, the employees of the contractor shall not be deemed to be in the employment of BHEL
2.20	FORCE MAJEURE The following shall amount to Force Majeure:- 2.20.1 Acts of God, act of any Government, War, Sabotage, Riots, Civil commotion, Police action, Revolution, Flood, Fire, Cyclones, Earth quake and Epidemic and other similar causes over which the contractor has no control. 2.20.2 If the contractor suffers delay in the due execution of the contractual obligation due to delays caused by force majeure as defined above, the agreed time of completion of the job covered by this contract or the obligations of the contractor shall be extended by a period of time equal to period of delay, provided that on the occurrence of any such contingency, the contractor immediately reports to BHEL in writing the causes of delay and the contractor shall not be eligible for any compensation.
2.21	ARBITRATION & RECONCILIATION 2.21.1 In case amicable settlement is not reached in the event of any dispute or difference arising out of the execution of the Contract or the respective rights and liabilities of the parties or in relation to interpretation of any provision by the Contractor in any manner touching upon the Contract, such dispute or difference shall (except as to any matters, the decision of which is specifically provided for therein) be referred to the sole arbitration of the arbitrator appointed by BHEL/In charge(Region). The award of the Arbitrator shall be binding upon the parties to the dispute Subject as aforesaid, the provisions of Arbitration and Reconciliation Act 1996 (India) or statutory modifications or re enactments thereof and the rules made there under and for the time being in force shall apply to the arbitration proceedings under this clause. The venue of the arbitration shall be the place from which the contract is issued or such other place as the Arbitrator at his discretion may determine 2.21.2 In case of Contract with Public Sector Enterprise (PSE) or a Government Department, the following shall be applicable :

Bharat Heavy Electricals Limited		
Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 28 OF 30

In the event of any dispute or difference relating to the interpretation and application of the provisions of the Contract, such dispute or difference shall be referred to by either party to the arbitration of one of the arbitrators in the department of public enterprises. The award of the arbitrator shall be binding upon the parties to the dispute, provided, however, any party aggrieved by such award may make further reference for setting aside or revision of the award to the Law Secretary, Department of Legal Affairs, Ministry of Law and Justice, Government of India. Upon such reference the dispute shall be decided by the Law Secretary or the Special Secretary or Additional Secretary when so authorized by the Law Secretary, whose decision shall bind the parties hereto finally and conclusively.

2.21.3 The cost of arbitration shall be borne equally by the parties.

2.21.4 Work under the contract shall be continued during the arbitration proceedings

2.22 RETENTION AMOUNT

2.22.1 Retention Amount shall be 5% of executed contract value and shall be recovered at the rate of 5% from each Running Bill admitted, including PVC Bills.

2.22.2 Refund of Retention Amount shall be as follows:

- i) 50% of retention amount along with 'Final Bill'
- ii) Balance 50% of retention amount shall be retained towards 'Performance Guarantee for Workmanship' and shall become refundable after expiry of Guarantee period, provided all the defects noticed during the guarantee period have been rectified to the satisfaction of BHEL Site Engineer/BHEL Construction Manager, and after deducting all expenses/other amounts due to BHEL under the contract/other contracts entered into by BHEL with them. This portion of the retention amount can be released on commencement of the Guarantee period, on submission of equivalent Bank Guarantee.

2.23 PAYMENTS

Payments to Contractors are made in any one of the following forms

2.23.1 Running Account Bills (RA Bills)

- i) These are for interim payments when the contracts are in progress. The bills for such interim payments are to be prepared by Contractor in prescribed formats (RA Bill forms).
- ii) Payments shall be made according to the extent of work done as per measurements taken up to the end of the calendar month and in line with the terms of payments described in the Tender documents
- iii) Recoveries on account of electricity, water, statutory deductions, etc are made as per terms of contract
- iv) Full rates for the work done shall be allowed only if the quantum of work has been done as per the specifications stipulated in the contract. If the work is not executed as per the stipulated specifications, BHEL may ask the contractor to re do the work according to the required specifications, without any extra cost. However, where this is not considered necessary 'OR' where the part work is done due to factors like non-availability of material to be supplied by BHEL 'OR' non availability of fronts 'OR' non availability of drawings, fraction payment against full rate, as is considered reasonable, may be allowed with due regard for the work remaining to be done. BHEL decision in this regard will be final and

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 29 OF 30

binding on the contractor. v) In order to facilitate part payment, BHEL Site Engineer at his discretion may further split the contracted rates/percentages to suit site conditions, cash flow requirements according to the progress of work 2.23.2 Final Bill Final Bill' is used for final payment on closing of Running Account for works or for single payment after completion of works. 'Final Bill' shall be submitted as per prescribed format after completion of works as per scope and upon material reconciliation, along with the following. i) 'No Claim Certificate' by contractor ii) Clearance certificates where ever applicable viz Clearance Certificates from Customer, various Statutory Authorities like Labour department, PF Authorities, Commercial Tax Department, etc iii) Indemnity bond as per prescribed format BHEL shall settle the final bills after deducting all liabilities of Contractor to BHEL		
2.24	PERFORMANCE GUARANTEE FOR WORKMANSHIP	
2.24.1	Even though the work will be carried out under the supervision of BHEL Engineers the Contractor will be responsible for the quality of the workmanship and shall guarantee the work done for a period of twelve months from the date of commencement of guarantee period as defined in Special Conditions of Contract, for good workmanship and shall rectify free of cost all defects due to faulty erection detected during the guarantee period. In the event of the Contractor failing to repair the defective works within the time specified by the Engineer, BHEL may proceed to undertake the repairs of such defective works at the Contractor's risk and cost, without prejudice to any other rights and recover the same from the Guarantee money.	
2.24.2	BHEL shall release the guarantee money subject to the following i) Contractor has submitted 'Final Bill' ii) Guarantee period as per contract has expired iii) Contractor has furnished 'No Claim Certificate' in specified format iv) BHEL Site Engineer/Construction Manager has furnished the 'No Demand Certificate' in specified format v) Contractor has carried out the works required to be carried out by him during the period of Guarantee and all expenses incurred by BHEL on carrying out such works is included for adjustment from the Guarantee money refundable.	
2.25	CLOSING OF CONTRACTS The Contract shall be considered completed and closed upon completion of all contractual obligations and settlement of Final Bill or completion of Guarantee period whichever is later. Upon closing of Contract, BHEL shall issue a completion certificate as per standard format, based on specific request of Contractor.	
2.26	REVERSE AUCTION: BHEL reserves the right to go for Reverse Auction for Price Bid Opening by BHEL appointed service provider, instead of opening the submitted sealed price bid in the conventional way. The Business Rules for Reverse Auction shall be as per BHEL guidelines issued from time to time.	
2.27	SUSPENSION OF BUSINESS DEALINGS BHEL reserves the right to take action against Contractors who either fail to perform or Tenderers/Contractor who indulge in malpractices, by suspending business dealings with them in	

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 30 OF 30

line with BHEL guidelines issued from time to time.	
2.28	OTHER ISSUES
2.28.1	Value of Non judicial Stamp Paper for Bank Guarantees and for Contract Agreement shall be not less than Rs 100/- unless otherwise required under relevant statutes.
2.28.2	In case of any conflict between the General Conditions of Contract and Special Conditions of Contract, provisions contained in the Special Conditions of Contract shall prevail.
2.28.3	Unless otherwise specified in NIT, offers from consortium/JVs shall not be considered.
2.28.4	BHEL may not insist for signing of Contract Agreements in respect of low value and short time period contracts like providing services for Hot water flushing, Chemical Cleaning, Transportation, etc

Bharat Heavy Electricals Limited Power Sector – Eastern Region, Kolkata		
TENDER NO. PSER:SCT:RGN-S2098:21		
VOLUME-ID	SPECIAL CONDITIONS OF CONTRACT (SERVICE)	PAGE1OF47

CONTENTS

SN	DESCRIPTION	Chapter	No. OF PAGES
1	General Intent of the Specifications	Chapter-I	
2	General Services to be rendered by the Bidder	Chapter-II	
3	General Technical Requirements (Codes and Standards)	Chapter-III	
4	Obligations of Contractor (In respect of Tools, Tackles, Consumables, etc employment of supervisory staff and workmen)	Chapter-IV	
5	Responsibilities of Contractor (In respect of employment of Labour, Supervisory staff, etc)	Chapter-V	
6	Material Handling, Storage, Preservation, etc	Chapter-VI	
7	Drawings and Documents	Chapter-VII	
8	Inspection and Quality	Chapter-VIII	
9	HSE & OHSAS Obligations	Chapter-IX	
10	RA Bill Payment	Chapter-X	
11	Performance Monitoring	Chapter-XI	
12	Suspension of Business Dealings	Chapter-XII	

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - I : General Intent of Specifications

1.0	INTENT OF THE SPECIFICATION
1.1	The intent of this erection specification is to provide services for execution of the project according to most modern and proven techniques and codes. The omission of specific reference to any method, equipment or material necessary for the proper and efficient services towards installation of the plant shall not relieve the contractor of the responsibility of providing such services / facilities to complete the work or portion of work awarded to him. The quoted / accepted rates / price shall deem to be inclusive of all such contingencies.
1.2	The work shall conform to dimensions and tolerances given in various drawings and documents that will be provided during erection. If any portion of works is found to be defective in workmanship and not conforming to drawings / documents or other stipulations, the contractor shall dismantle and re-do the work duly replacing the defective materials at their own cost, failing which recoveries, as determined by BHEL, shall be effected from contractor's bills.
1.3	It is not the intent of this specification to specify herein all the details of erection and commissioning. However, the system shall conform in all respects to high standards of quality and workmanship for performing the required duties in a manner acceptable to purchaser who will interpret the meaning of drawings and specifications and shall be entitled to reject any work or material, which in his judgments is not in full accordance herewith.
1.4	The omission of specific reference to any fabrication / erection or other method, equipment or material necessary for proper and efficient working of the plant shall not relieve the tenderer of the responsibility of providing such facilities to complete the work at quoted rates. Any mismatch/ defect found due to mistake in fabrication / erection shall have to be rectified by the vendor free of cost. Inspection by BHEL/Customer does not relieve vendor of his responsibility of executing quality erection.
1.5	The work covered under this specification is of highly sophisticated nature, requiring the best quality workmanship, supervision, engineering and construction management. The contractor should ensure proper planning and successful and timely completion of the work to meet the overall project schedule. The contractor must deploy adequate quantity of tools & plants, modern / latest construction aids etc. He must also deploy adequate trained, qualified and experienced supervisory staff and skilled personnel.

Bharat Heavy Electricals Limited Power Sector – Eastern Region, Kolkata		
VOLUME-ID	TENDER NO. PSER:SCT:RGN-S2098:21	PAGE2OF47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - I : General Intent of Specifications

1.6	Contractor shall erect and commission all the equipments and auxiliaries as per the sequence & methodology prescribed by BHEL depending upon the technical requirements. Availability of materials and fronts will decide this. BHEL Engineer's decision regarding correctness of the work and method of working shall be final and binding on the contractor. No claims for extra payment from the contractor will be entertained on the ground of deviation from the methods / sequence adopted in erection of similar sets elsewhere.
1.7	Following shall be the minimum responsibility of contractor and have to be provided within finally accepted rates / prices:
1.7.1	Provision as required of all types of labour, supervisors, engineers, watch and ward, tools & tackles, calibrated MMEs (Monitoring and Measuring Equipment) as specified and otherwise required for the work, consumables for erection, testing and commissioning including material handling
1.7.2	Achieving Proper out-turn / Turn-over as per BHEL plan and commitment.
1.7.3	Completion of work as per BHEL Schedule
1.7.4	Good quality and accurate workmanship for proper performance of the equipment
1.7.5	Repair and rectification
1.7.6	Preservation / Re-conservation of all components during storage / erection / commissioning till handing over.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - II : General Services to be rendered by the Bidder

2.0	GENERAL SERVICES TO BE RENDERED BY THE BIDDER
2.1	Services for construction, fabrication, equipment erection testing as well as trial run & commissioning of various equipment and accessories under the contract shall include but not be limited to the following:
2.2	Issuing materials from store/open yard from time to time for erection as per the construction programme. The Contractor shall be the custodian of all the materials issued till the plant/equipment is officially taken over by the owner / BHEL after complete erection any successful trial run & commissioning.
2.3	Transport of material to their respective places of erection and erection of the complete plant & equipment as supplied under this specification.
2.4	Trial run and commissioning of individual equipment / sub-systems to the satisfaction of Owner/BHEL.
2.5	Deployment of all skilled and unskilled manpower required for erection, supervision of erection, watch & ward, commissioning and other services to be rendered under this specification.
2.6	Deployment of all erection tools & tackle, construction machinery, transportation vehicles and all other implements in adequate number and size, appropriate for the erection work to be handled under scope of this specification except otherwise specified.
2.7	Supply of all consumables, eg welding electrodes, cleaning agents, diesel oil, lubricant etc as well as materials required for temporary supports, scaffolding etc as necessary for such erection work, unless specified other wise.
2.8	Providing support services for the contractor's erection staff eg construction of site offices, temporary stores, residential accommodation and transport to work site for erection personnel, watch and ward for security and safety of the materials under the Contractor's custody etc. as required.
2.9	Maintaining proper documentation of all the site activities undertaken by the Contractor as per the proforma mutually agreed with BHEL, Submission of monthly progress reports and any such document as and when desired by BHEL/owner, taking approval of all statutory authorities i.e Boiler Inspector, Factory Inspector, Inspector of Explosives etc , as applicable for respective portions of work fall under the jurisdiction of such statutes of laws.
2.10	Any other service, although not specifically called for but required for a contract of the size and nature indicated in the specification.

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter - III : General Technical Requirements (Codes and Standards)

3.0	GENERAL TECHNICAL REQUIREMENTS (CODES AND STANDARDS)
3.1	Except where otherwise specified, the plant/equipment shall comply with the appropriate Indian Standard or an agreed internationally accepted Standard Specification as mentioned elsewhere in contract specifications, each incorporating the latest revisions at the time of tendering. Where no internationally accepted standard is applicable, the Bidder shall give all particulars and details as necessary, to enable BHEL to identify all of the plant/equipment in the same detail as would be possible had there been a Standard Specification.
3.2	Where the Bidder proposes alternative codes or standards he shall include in his tender one copy (in English) of each Standard Specification to which materials offered shall comply. In such case, the adopted alternative standard shall be equivalent or superior to the standards mentioned in the specification.
3.3	In the event of any conflict between the codes and standards referred above, and the requirements of this specification, the requirements which are more stringent shall govern.
3.4	Tools used during erection and commissioning shall not be accepted except with the specific approval of the Engineer.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

4.0	OBLIGATIONS OF CONTRACTOR
4.1	CONSUMABLES & OTHER ITEMS
4.1.1	The contractor shall provide within finally accepted price / rates, all consumables (excepting those indicated in BHEL scope) like welding electrodes (including alloy steel and stainless steel), filler wires, TIG filler wires (over & above as supplied by the unit along with the plant materials, which will be given free of cost to bidder), gases (inert, welding, cutting), soldering material, dye penetrants, radiography films, etc. Other erection consumables such as tapes, jointing compound, grease, mobile oil, M-seal, Araldite, petrol, CTC / other cleaning agents, grinding and cutting wheels are to be provided by the contractor. Steel, packers, shims, wooden planks, scaffolding materials hardware items etc required for temporary works such as supports, scaffoldings are to be arranged by the contractor. Sealing compounds, gaskets, gland packing, wooden/concrete sleepers, for temporary work, required for completion of work except those which are specifically supplied by manufacturing unit are also to be arranged by the contractor.
4.1.2	All the shims, gaskets and packing, which go finally as part of plant equipment, shall be supplied by BHEL free of cost.
4.1.3	It shall be the responsibility of the contractor to plan the activities and store sufficient quantity of consumables. Non-availability of any consumable materials or equivalent suggested by BHEL cannot be considered as reason for not attaining the required progress or for additional claim.
4.1.4	<u>TIG Filler wire for Boiler and Filler wires for Electrodes for P91/T91 piping:</u> These shall be supplied by BHEL free of cost as supplied by BHEL Manufacturing Units as part of regular supply. Required quantity as arrived at by calculation / standards will only be supplied. It would be the contractors' responsibility to account for the consumption of these filler wires. Additional consumption beyond standard / calculated quantity will be at cost recovery basis only unless and otherwise accounted for. Surplus quantity of TIG filler wire, if any, shall be properly stored and returned to BHEL stores.
4.1.5	It shall be the responsibility of the contractor to obtain prior approval of BHEL, regarding suppliers, type of electrodes etc before procurement of welding electrodes. On receipt of electrodes at site these shall be subjected to inspection and approval by BHEL. The contractor shall inform BHEL details regarding type of electrodes, batch number, date of expiry etc and produce test certificate for each lot / batch with correlation of batch / lot number with respective test certificate. No

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	electrode without a valid test certificate will to be used.
4.1.6	BHEL reserves the right to reject the use of any consumable including electrodes, gases, lubricants / special consumables if it is not found to be of the required standard / make / purity or when shelf life has expired. Contractor shall ensure display of shelf life on consumable wherever required and records maintained.
4.1.7	Storage of all consumables including welding electrodes shall be done as per requirement / instruction of the Engineer by the contractor at his cost.
4.1.8	In case of improper arrangement for procurement of any consumable, BHEL reserves the right to procure the same from any source and recover the cost from the Contractor's first subsequent bill at market value plus the departmental charges of BHEL from time to time. Postponement of such recovery is normally not permitted. The decision of Engineer in this regard shall be final and binding on the Contractor.
4.1.9	All lubricants and chemicals required for pre-commissioning, commissioning, testing, preservation and lubricants for trial runs of the equipment shall be supplied by BHEL / BHEL's client. All services including labour and T&P will be provided by the contractor for handling, filling, emptying, refilling etc. The consumption of lubricants / chemicals shall be properly accounted for. Surplus material if any shall be properly stacked/tagged and returned to BHEL/ CUSTOMER stores at no extra cost to BHEL. BHEL reserves the right to recover costs for wastage by the contractor.
4.1.10	Transportation of oil drums, from stores, filling of oil for flushing, first filling, subsequent changeover if any, topping/making up till the unit is fully commissioned and handed over to customer is included in scope of this contract. The contractor shall have to return all the empty drums to BHEL / BHEL's client store at no extra cost. Any loss / damage to above drums shall be to contractor's account.
4.1.11	All charges on account of Octroi, terminal or sales tax and other duties on materials obtained from any source for carrying out the works in the scope of the contractor shall be borne by the contractor.
4.2	TOOLS AND PLANTS / MONITORING AND MEASURING EQUIPMENT (MMEs)
4.2.1	T&Ps and MMEs to be provided by Contractor
4.2.1.1	All T&Ps and MMEs excepting those specifically indicated in BHEL scope are to be provided by the Contractor. Contractor has to make his own arrangement at his cost for completing the formalities (including arrangement of Road permits, if any) if required with Sales Tax/VAT authorities, for bringing their materials, plants and

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	equipments at site for the execution of work under this contract.
4.2.1.2	All suitable cranes, lifting and transport equipments for material handling at stores/yard/siding of BHEL/Customer are included in scope. BHEL's cranes will not be available for this purpose unless otherwise specifically permitted as per contract conditions
4.2.1.3	All T&Ps to be deployed by the contractor shall have the approval of BHEL Engineer with regard to brand, quality and specification.
4.2.1.4	Indicative list of Major T&Ps in the scope of Contractor are given in the Technical Conditions of Contract. Bidders to note that these are only indicative and as such all other T&P necessary for timely and satisfactory completion of work in scope shall be mobilized by Contractor
4.2.1.5	Timely deployment of adequate T&Ps is the responsibility of the contractor. The contractor shall be prepared to augment the T&P at short notice to match the planned programme and to achieve the milestones.
4.2.1.6	Contractor shall maintain and operate his tools and plants in such a way that major breakdowns are avoided. In the event of major breakdown, contractor shall make alternative arrangements expeditiously so that the progress of work is not hampered.
4.2.1.7	In the event of contractor failing to arrange the required tools, plants, machinery, equipment, material or non-availability of the same owing to breakdown, BHEL will make alternative arrangement at the risk and cost of the contractor. Decision of BHEL shall be final and binding on the contractor
4.2.1.8	The T&P to be arranged by the contractor shall be in proper working condition and their operation shall not lead to unsafe condition. The movements of cranes, and other equipment should be such that no damage / breakage occurs to foundations, other equipments, material, property and men. All arrangements for the movement of the T&P etc shall be the contractor's responsibility.
4.2.1.9	Use of welding generators/ rectifiers only shall be permitted for welding. Use of welding transformers will be subject to specific approval of BHEL engineer.
4.2.1.10	The contractor at his cost shall carry out periodical testing of his construction equipments. Test certificates shall be furnished to BHEL.
4.2.1.11	Contractor shall ensure deployment of serviced and healthy T&Ps including cranes, lifting tackles, wire ropes, manila ropes, winches and slings etc. History card and maintenance records for major T&Ps will be maintained by the contractor and will be made available to BHEL Engineer for inspection as and when required.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	Fitness certificate / Test Certificates of T&P shall have to be submitted before it is put in use. Identification for such T&Ps will be done as per BHEL Engineer's advice. BHEL reserves the right to permit only new slings up to 20 mm and lifting tackles up to 3 MT capacities.
4.2.1.12	Contractor shall ensure deployment of reliable and calibrated MMEs (Inspection measuring and Monitoring equipment). The MMEs shall have test / calibration certificates from authorized / Government approved / accredited agencies traceable to National / International standards. Each MME shall have a label indicating calibration status i.e. date of calibration, calibration agency and due date for calibration. A list of such instruments deployed by contractor at site with its calibration status is to be submitted to BHEL Engineer for control.
4.2.1.13	Re-testing / re-calibration shall also be arranged at regular intervals during the period of use as advised by BHEL Engineer within the contract price. The contractor will also have alternate arrangements for such MME so that work does not suffer when the particular instrument is sent for calibration. If any MMEs not found fit for use, BHEL shall have the right to stop the use of such item. It will be necessary for the contractor to deploy proper item. Any readings taken by the defective instrument will be recalled and repeat the readings taken by that instrument with a proper one. In case he fails to do so, BHEL may deploy MMEs and retake the readings at contractor's cost.
4.2.1.14	BHEL shall have lien on all T&P, MMEs and other equipment of the contractor brought to the site for the purpose of erection, testing and commissioning. BHEL shall continue to hold the lien on all such items throughout the period of contract / extended period. The contractor and / or his sub-contractors, without the prior written approval of the Engineer, shall remove no material brought to the site.
4.2.1.15	The month wise T&P deployment plan to execute the work is to be submitted as per relevant format as per the instruction of BHEL. It shall be the contractor's responsibility to deploy the required T&P, for timely and successful completion of the job, to any extent.
4.2.2	Obligations in respect of T&Ps and MMEs provided by BHEL
4.2.2.1	T&P / MMEs being provided by BHEL to sub-contractor free of hire charges shall be shared by other subcontractors working for BHEL at site and the allotment done by BHEL Engineer shall be final and binding.
4.2.2.2	BHEL T&P will be issued in basic assembled condition. Additional loose components / sub-assemblies / attachments as and when necessary, will be

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	issued by BHEL. Assembly of such additional loose components/sub-assemblies/ attachments is in contractor's scope.
4.2.2.3	In case of non-availability of the T&Ps to be provided by BHEL due to breakdown, major overhauls, distribution pattern or any other reason, the contractor shall plan / amend / alter his activities to meet erection / commissioning targets in consultation with BHEL.
4.2.2.4	void
4.2.2.5	The contractor shall engage trained and experienced operators for the operation of BHEL's T&Ps. Their skill / performance will be checked by BHEL Engineer before they are allowed to operate the same. However checking of skills by BHEL does not absolve the contractor of his responsibilities for proper and safe handling of equipment, consistent good performance of operators and regular performance evaluation of operators.
4.2.2.6	The day to day operation and maintenance of BHEL's T&Ps (Other than cranes) shall be carried out by contractor as per manufacturer's / BHEL's maintenance schedule at his cost. The contractor shall arrange, at his own cost, trained operators, fuel and other consumables for their operation. BHEL shall arrange all spares needed for upkeep of major T&Ps provided like Huck Bolting Machine*, DG Set, Induction Machine and Hydraulic Test pumps. The contractor has to arrange for fixing of the spares; supervision in specialized cases will be provided by BHEL. For upkeep of all other T&Ps supplied by BHEL, spares shall be arranged by the Contractor. BHEL supplied T&Ps shall be maintained in good working condition during the entire period of use. T&Ps in defective / damaged condition shall be rectified promptly to the full satisfaction of BHEL engineer. Contractor shall maintain records for maintenance of major T&Ps. These shall be made available for Inspection whenever required. In case of any lapses on the part of the contractor, BHEL at its own discretion shall get the servicing / repair of equipment done at the risk and cost of the contractor along with BHEL overheads. Further, if there are breakdowns / damages due to negligence of the contractor, the complete service / repair charges and cost of all the spares damaged with BHEL overheads shall be recovered from contractor's RA bills. *: for operation and maintenance of ESP Huck bolting machine, BHEL shall provide the basic power rig and hose. Balance toolingsie Guns, chuck jaws etc are to be arranged by contractor.
4.2.2.7	void

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

4.2.2.8	Increasing / shortening of the crane boom to suit work requirements shall have to be arranged by the indenting contractor at his cost including restoration to a state as directed by BHEL. All necessary manpower tools, support, consumables, illumination etc. will have to be arranged by contractor at his cost. If required, contractor has to return the crane with original boom.
4.2.2.9	The area and infrastructure development of the area to be carried out by the customer. However in construction projects of this magnitude it is possible that all the areas / approaches may not be ready. In such cases backfilling of approaches where ever necessary, consolidation of ground and arrangement of sleepers / sand bag filling etc for safe operation / movement of equipment including cranes / trailers etc shall be the responsibility of the contractor at his cost. No compensation on this account shall be payable.
4.2.2.10	In the event of contractor not using and maintaining BHEL T&Ps according to BHEL's instructions. BHEL will have the right to withdraw such item without any notice and no claim in this regard shall be entertained and contractor shall be responsible for delay in execution on this account.
4.2.2.11	The contractor shall furnish regular utilization report of the BHEL T&Ps, as per requirement of BHEL.
4.2.2.12	Any loss / damage to any part of BHEL T&Ps and MMEs shall be to the contractor's account and any expenditure on these accounts by BHEL will be recovered from the contractor's bill in case the contractor fails to make good the loss.
4.2.2.13	It shall be responsibility of the contractor to take delivery of T&Ps and MMEs from stores or place of use by other contractor at project site, transport the same to site and return the same to BHEL store / place as intimated by Engineer in project site in good working conditions after use.
4.2.2.14	The contractor shall return BHEL T&Ps and MMEs issued to him in good working condition as and when desired by BHEL (on completion or reduction of workload). If contractor delays return of T&P and MME, hire charges as applicable shall be levied by BHEL from time, it was requisitioned till the time of actual return. T&Ps and MMEs returned in damaged / unserviceable condition shall be got repaired by BHEL at its own discretion and entire cost of repair with BHEL overheads shall be recovered from the contractor.
4.2.2.15	Replacement cost including BHEL overheads in respect of irreparable / completely damaged / non return of T&Ps and MMEs shall be recovered from the

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	contractor's running / final bills
4.2.2.16	Obligations in respect of Cranes provided by BHEL
a)	BHEL will make available the cranes (as per Technical Conditions of Contract) free of charge to the contractor on sharing basis mainly for the purposes enumerated/indicated therein. BHEL cranes have to be shared with other agencies / contractors of BHEL. The allocation of cranes shall be the discretion of BHEL engineer, which shall be binding on the contractor.
b)	BHEL Cranes may be initially issued in basic assembled condition. Any alteration/addition like boom reduction / extension, assembly of components/sub-assemblies needed for modulating the capacity/reach/other features of cranes and restoration to the state as directed by BHEL shall be the contractor's responsibility.
c)	In case the BHEL cranes are not covered under AMC of BHEL, then the day-to-day upkeep and running maintenance like filling / topping up of lubricants, changing filters, etc including repair of self starter and dynamo of these cranes shall be the responsibility of the contractor. If on checking it is found that the same is not followed, BHEL will exercise its right to get the job/works done at the risk and cost of contractor. In case BHEL cranes are covered under AMC awarded by BHEL, then the day-to-day upkeep and running maintenance as described above are excluded from scope. However any additional helpers if any required during Preventive/Breakdown Maintenance, Assembly/disassembly shall be provided by contractor at no extra cost. BHEL may also provide cranes through crane hiring agencies in which case the day-to-day upkeep and running maintenance shall be excluded from scope of contractor.
d)	Minor consumables like cotton cloth, cotton waste, etc is to be supplied by Contractor. All spares and lubricants/grease is excluded from scope. Contractor to give the requirements of these items well in advance in case the cranes provided by BHEL are BHEL owned cranes.
e)	Unless otherwise specified, trained operators for BHEL owned cranes shall be provided by the contractor. These operators should possess valid license for heavy vehicle.
f)	BHEL cranes will be withdrawn for regular and capital maintenance as per the respective schedule of maintenance. As far as possible such schedules will be intimated to the contractor in advance and may be adjusted depending on the work

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	requirements at site. However no claim whatsoever will be entertained on account of non-availability of cranes.
g)	Where the services of the cranes provided by BHEL are to be shared by other agencies/ contractors of BHEL, the contractor's responsibilities defined above will also be apportioned accordingly to the beneficiary agency. Working arrangements in this regard will be done at site by BHEL engineer and in any case his decision shall be final and binding.
h)	Major breakdowns will be attended to by BHEL. However, in case of breakdowns or damages due to negligence of the contractor, the complete service/repair charges including cost of spares shall be to the account of the contractor, along with BHEL overheads.
4.2.2.17	Obligations in respect of Construction Lift/Elevators provided by BHEL
a)	The total erection including commissioning, maintenance, statutory clearances shall be included in scope of work. Supervision by the original equipment supplier or their authorized agency shall be arranged for by BHEL, in case found necessary.
b)	All day to day and routine maintenance and checking is to be carried out by the contractor as per the recommendations of the supplier. He should periodically check the brakes and carry out the all works to ensure the safety of all those using the lift/elevator. BHEL shall arrange spares required for upkeep of Construction lift/elevator
c)	The construction lift/elevator should never be overloaded as this can lead to serious accidents. Ensuring all safety aspects in operation of the lift shall be the responsibility of the contractor. Erection of all the required number of landing platforms is included in scope. Landing platforms are to be provided with proper barricades and hand railings.
d)	After completion of contractual scope of work or as per BHEL advice, the temporary elevator/lift shall be dismantled and handed over to BHEL neatly identified/tagged. Temporary structures/platforms etc erected for the elevators/lifts are also to be dismantled and materials to be returned to stores as applicable. The construction and dismantling of the foundations required for the construction/elevator lifts is included in the scope of the contractor.

SPECIAL CONDITIONS OF CONTRACT (SCC)
**Chapter – V : Responsibilities of Contractor in respect of Labour,
Supervisory Staff, etc.**

5.0	RESPONSIBILITIES OF CONTRACTOR IN RESPECT OF LABOUR, SUPERVISORY STAFF, ETC.
5.1	Refer relevant clauses of General Conditions of Contract (GCC) also in this regard
5.2	The contractor shall deploy all the necessary skilled/semiskilled/ unskilled labour including highly skilled workmen etc. These workmen should have previous experience on similar job. They shall hold valid certificates wherever necessary. BHEL reserves the right to insist on removal of any employee of the contractor at any time if he is found to be unsuitable and the contractor shall forthwith remove him.
5.3	Contractor shall also comply with the requirements of local authorities/ project authorities calling for police verification of antecedents of the workmen, staff etc.
5.4	It is the responsibility of the contractor to engage his workmen in shifts and or on overtime basis for achieving the targets set by BHEL. This target may be set to suit BHEL's commitments to its customer or to advance date of completion of events or due to other reasons. The decision of BHEL in regard to setting the erection and commissioning targets will be final and binding on the contractor.
5.5	Contractor shall provide at different elevation suitable arrangement for urinal and drinking water facility with necessary plumbing & disposal arrangement including construction of septic tank. These installations shall be maintained in hygienic condition at all times.
5.6	The Contractor in the event of engaging 20 or more workmen, shall obtain Independent license under the Contract labour (Regulation and Abolition) Act 1970 from the concerned authorities based on Form-V issued by the Principal Employer/Customer. In order to issue Form-V by Customer, Contractor shall fulfill all Statutory requirements like Insurance Policy, PF Code/PF Account number etc as per the requirement of BHEL/Customer
5.7	Contractor shall deduct the necessary amount towards Provident Fund and contribute equal amount as per Government of India laws. This amount will be deposited regularly to the provident Fund Commissioner. BHEL/Customer may insist for submission of the account code duly certified by PF Commissioner
5.8	Contractor may also be required to comply with provisions of ESI Act in vogue if applicable and submit evidence to BHEL.
5.9	BHEL / customer may insist for witnessing the regular payment to the labour. They may also like to verify the relevant records for compliance with statutory

SPECIAL CONDITIONS OF CONTRACT (SCC)
**Chapter – V : Responsibilities of Contractor in respect of Labour,
Supervisory Staff, etc.**

	requirements. Contractor shall enable such facilities to BHEL / Customer.
5.10	Contractor shall deploy only qualified and experienced engineers/ supervisors. They shall have professional approach in executing the work.
5.11	The contractor's supervisory staff shall execute the work in the most professional manner in the stipulated time. Accuracy of work and aesthetic finish are essential part of this contract. They shall be responsible to ensure that the assembly and workmanship conform to dimensions and tolerances given in the drawings/instructions given by BHEL engineer from time to time.
5.12	The supervisory staff employed by the contractor shall ensure proper outturn of work and discipline on the part of the labour put on the job by the contractor. Also in general they should see that the works are carried out in a safe and proper manner and in coordination with other labour and staff employed directly by BHEL or other contractors of BHEL or BHEL's client.
5.13	It is the responsibility of the contractor to arrange gate pass for all his employees, T&P etc for entering the project premises. Necessary coordination with customer officials is the responsibility of the contractor. Contractor to follow all the procedures laid down by the customer for making gate passes. Where permitted, by customer / BHEL, to work beyond normal working hours, the contractor shall arrange necessary work permits for working beyond normal working hours.
5.14	The actual deployment will of Labour and Engineer/supervision staff shall be so as to satisfy the erection and commissioning targets set by BHEL. If at any time, it is found that the contractor is not in a position to deploy the required engineers/supervisors/workmen due to any reason, BHEL shall have the option to make alternate arrangements at the contractor's risk and cost. The expenditure incurred along with BHEL overheads thereon shall be recovered from the contractor
5.15	Contractor shall not deploy women labour at night.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

6.0	MATERIAL HANDLING, STORAGE AND PRESERVATION ETC
6.1	MATERIAL HANDLING AND STORAGE
6.1.1	All the equipments/materials furnished under this contract shall be received from the project stores, sheds / storage yards and transported to pre assembly area / erection site and stored in the storage spaces in a manner so that they are easily retrievable till the contractor erects them. While drawing/lifting material from BHEL / customer stores, the contractor shall ensure that the balance / other materials are stacked back immediately. No claim is admissible on this account
6.1.2	While BHEL will endeavor to store / stack / identify materials properly in their open / close / semi closed / tarpaulins covered storage yard / shed, it shall be contractor's responsibility to assist BHEL in identifying materials well in time for erection. They should take the delivery of the same, following the procedure indicated by BHEL, and transport the material safely to pre-assembly yard / erection site in time, according to program.
6.1.3	The contractor shall take delivery of components, equipment / consumables from storage area after getting the approval of BHEL Engineer on standard indent forms.
6.1.4	The contractor shall identify and deploy necessary Engineers / supervisors / workmen for the above work in sufficient number as may be needed by BHEL, for areas covering their scope.
6.1.5	All the equipment shall be handled very carefully to prevent any damage or loss. No untested wire ropes / slings etc. shall be used for unloading / handling. The equipment shall be properly protected to prevent damage either to the equipment or to the floor where they are stored. The equipment from the stores shall be moved to the actual location at the appropriate time so as to avoid damage of such equipment at site.
6.1.6	Contractor shall ensure that while lifting slings shall be put over the points indicated on the equipment or as indicated in the manufacturer's drawings. Slings / shackles of proper size shall be used for all lifting and rigging purposes. All care shall be taken to safe guard the equipment against any damage. Dragging of piping / valves should be avoided. In case of any damage the cost shall be covered from the contractor.
6.1.7	Approach road conditions from the stores / yards to the erection site may not

Bharat Heavy Electricals Limited Power Sector – Eastern Region, Kolkata		
VOLUME-ID	TENDER NO. PSER:SCT:RGN-S2098:21	PAGE16OF47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

	be equipped and ideal for smooth transportation of the equipment. Contractor may have to be adequately prepared to transport the materials under the above circumstances without any extra cost. . The contractor may familiar himself with soil conditions at site.
6.1.8	Contractor shall be responsible for examining all the plant and materials issued to him and notify the Engineer immediately of any damage, shortage, discrepancy etc before they are moved out of the stores / storage area. The contractor shall be solely responsible for any shortages or damages in transit, handling, storage and erection of the equipment once received by him. As the erection work will be spread in different areas / locations of the project, contractor has to arrange sufficient number of watch / ward personal to avoid any pilferage of material
6.1.9	The contractor shall maintain an accurate and exhaustive record-detailing out the list of all equipment received by him for the purpose of erection and keep such record open for the inspection of the engineer at any time.
6.1.10	All the material in the custody of contractor and stored in the open or dusty locations must be covered with suitable weather proof / fire retardant covering material wherever applicable and shall be blocked up on raised level above ground. All covering materials including blocks and sleeper shall be arranged by the contractor at his cost.
6.1.11	If the material belonging to the contractor are stored in area other than those earmarked for his operation the engineer will have the right to get it moved to the area earmarked for the contractor at the contractors risk and cost.
6.1.12	The contractor shall be responsible for making suitable indoor storage facilities to store all equipment (drawn by the contractor from BHEL / customer stores), which require indoor storage till the time of their installation. The Engineer will direct the contractor in this regard, which item in his opinion will require indoor storage, and the contractor shall comply with Engineer's decision.
6.1.13	The contractor shall ensure that all surplus / damaged / scrap / unused material, packing wood / containers/ special transporting frames etc are returned to BHEL at a place in project area identified by the Engineer. The contractor will maintain an account for all items received and returned to BHEL. Any shortage in returning such items shall be chargeable to the contractor except allowable wastage for packing wood only.
6.1.14	The contractor shall hand over all parts / materials remaining extra over the normal requirement with proper identification tags to the stores as directed by

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

	the concerned BHEL engineer.
6.1.15	The contractor shall ensure that all the packing materials and protective devices installed on equipment during transit and storage are removed before installation.
6.1.16	It shall be the responsibility of the contractor to keep the work / storage areas in neat, tidy and working conditions. All surplus/unusable packing and other materials shall be removed and deposited at location(s) specified by BHEL within the project premises. If required weighing of the same within the project premises will have to be carried out.
6.2	PRESERVATION OF COMPONENTS
6.2.1	After taking delivery from BHEL / customer's stores, plant materials storage shall be subjected to the following protection besides other provisions indicated in these specifications elsewhere.
6.2.1.1	Items stored outdoors shall be stacked up at least six inches (6") off the ground. Items should not be stored in a low lying area where water logging is a possibility. Contractor should have sufficient numbers of wooden / concrete / steel sleepers for the job.
6.2.1.2	Motors, valves, electrical equipment, control equipment and instruments, and special or precision items requiring special care, etc shall be stored indoors. Motor windings shall be kept dry by use of external heat or space heaters.
6.2.1.3	Bearings and other wearing surfaces of plant materials shall be protected against corrosion and kept clean and should be regularly monitored.
6.2.1.4	Insulation materials shall be stored indoors or otherwise protected against getting wet/ damaged, using suitable measures and should be protected from direct rain.
6.2.2	It shall be the responsibility of the contractor to apply preservatives / touch up paints (primer) on equipment handled and erected by him till such time of final painting. It shall be contractor's responsibility to arrange for required paints (primer), thinners, labour, scaffolding materials, cleaning materials like wire brush, emery sheets, etc, cleaning of surface and provide one coat of preservatives / paints (primer) from time to time as decided by BHEL engineer. The accepted rate shall include this work also. It is to be noted that such painting may have to be done as and when required till such time the final painting is carried out.
6.2.3	The contractor shall effectively protect the finished work from action of weather

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter – VI: Material Handling, Storage & preservation

	and from damage or defacement and shall cover the finished parts then and there for their protection.
6.2.4	Any failure on the part of contractor to carry out works according to above clauses will entail BHEL to carry out the job from any other party and recover the cost from contractor.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VII: Drawings and documents

7.0	DRAWINGS AND DOCUMENTS
7.1	The detailed drawings, specifications available with BHEL engineers will be made available to the contractor during execution of work at site. The contractor will also ensure availability of all drawings / documents at work place.
7.2	Necessary drawings to carry out the erection work will be furnished to the contractor by BHEL on loan, which shall be returned to BHEL Engineer at site after completion of work. Contractor shall ensure safe storage and quick retrieval of these documents.
7.3	The contractor shall maintain a record of all drawings and documents available with him in a register as per format given by BHEL Engineer. Contractor shall ensure use of pertinent drawings / data / documents and removal of obsolete ones from work place and returning to BHEL.
7.4	The data furnished in various annexure enclosed with this tender specification are only approximate and for guidance. However, the change in the design and in the quantity may occur as is usual in any such large scale of work. The contractors quoted rates shall be inclusive of the above factor
7.5	Should any error or ambiguity be discovered in the specification or information the contractor shall forthwith bring the same to the notice of BHEL before commencement of work. BHEL's interpretation in such cases shall be final and binding on the contractor.
7.6	Deviation from design dimensions should not exceed permissible limit. The contractor shall not correct or alter any dimension / details, without specific approval of BHEL.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

8.0	INSPECTION AND QUALITY
8.1	Inspection, Quality Assurance, Quality Control
8.1.1	Preparation of quality assurance log sheets and protocols with customer/ consultants/statutory authority, welding logs, NDE records, testing & calibration records and other quality control and quality assurance documentation as per BHEL engineer's instructions, is within the scope of work/specification. These records shall be submitted to BHEL/customer for approval from time to time.
8.1.2	The protocols between contractor and customer/ BHEL shall be made prior to installation for correctness of foundations, materials, procedures, at each stage of installation, generally as per the requirement of customer/ BHEL. This is necessary to ensure elimination of errors or keeping them within tolerable limits and to avoid accumulation and multiplication of errors.
8.1.3	A daily log book should be maintained by every supervisor/engineer of contractor on the job in duplicate (one for BHEL and one for contractor) for detailing and incorporating alignment/clearance / centering / leveling readings and inspection details of various equipments etc. High pressure welding details like serial number of weld joints, welders name, date of welding, details of repair, heat treatment etc. will be documented in welding log as per BHEL Engineer's instructions. Record of radiography containing details like serial number of weld joints, date of radiography, repairs, if any, re-shots etc shall also be maintained as per BHEL Engineer's instructions. Record of heat treatments performed shall be maintained as prescribed by BHEL
8.1.4	The performance of welders will be reviewed from time to time as per the BHEL standards. Welders' performance record shall be furnished periodically furnished for scrutiny of BHEL's Engineer. Corrective action as informed by BHEL shall be taken in respect of those welders not conforming to these standards. This may include removal/ discontinuance of concerned welder(s). Contractor shall arrange for the alternate welders immediately
8.1.5	All the welders shall carry identity cards as per the proforma prescribed by BHEL/Customer/Consultant. Only welders duly authorized by

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	BHEL/customer/consultant shall be engaged on the work.
8.1.6	Contractor shall provide all the Measuring Monitoring Equipments (MMEs) required for completion of the work satisfactorily. These MMEs shall be of brand, quality and accuracy specified by BHEL Engineer and should have necessary calibration and other certificates as per the requirement of BHEL Engineer. Decision of BHEL Engineer regarding acceptance or otherwise of the measuring instruments/gauges/tools for the work under this specification, is final and binding on the contractor. BHEL may give an indicative list of MMEs required for this work and to be made available by the contractor. The list will be reviewed by BHEL and the contractor shall meet any augmentation needed wherever required.
8.1.7	It is the responsibility of the contractor to prove the accuracy of the testing/measuring/calibrating equipments brought by him based on the periodicity of calibration as called for in the BHEL's quality assurance standards/BHEL Engineer's instructions.
8.1.8	Any re-laying or re-termination of cables/re-erection of instruments/recalibration of instruments etc. required due to contractor's mistake or design requirement and found at any stage inspection, shall be carried out by the contractor at no extra cost.
8.1.9	BHEL, Power Sector Regions (PSNR/PSER/PSWR/PSSR) have already been accredited with ISO 9001 certification and as such this work is subject to various audits to meet ISO 9001 requirements. One particular aspect which needs special mention is about arrangement of calibration of instruments by the contractor. Contractor shall ensure deployment of reliable and calibrated MMEs (Measuring and Monitoring Equipments). The MMEs shall have test / calibration certificates from authorised / Government approved / Accredited agencies traceable to National / International Standards. Re-testing / re-calibration shall also be arranged at regular intervals during the period of use as advised by BHEL Engineer within the contract price. The contractor will also have alternate arrangements for such MMEs so that work does not suffer when the particular equipment / instrument is sent for calibration. Also if any MMEs not found fit for use, BHEL shall have the right to stop the use of such item and instruct the contractor to deploy proper item and recall ie repeat the readings taken by that instrument, failing which BHEL may deploy MME and retake the readings at Contractor's cost.
8.1.10	Re-work necessitated on account of use of invalid MMEs shall be entirely to the

Bharat Heavy Electricals Limited

Power Sector – Eastern Region, Kolkata

VOLUME-ID

TENDER NO. PSER:SCT:RGN-S2098:21

PAGE 22 OF 47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	contractor's account. He shall be responsible to take all corrective actions, including resource augmentation if any, as specified by BHEL to make-up for the loss of time.
8.1.11	In the courses of erection, it may become necessary to carry repeated checks of the work with instruments recently calibrated, re-calibrated. BHEL may counter/ finally check the measurements with their own MMEs. Contractor shall render all assistance in conduct of such counter/final measurements.
8.1.12	Total Quality is the watchword of the work and Contractor shall strive to achieve the Quality Standards, procedures laid down by BHEL. He shall follow all the instructions as per BHEL drawings and Quality Standards.
8.2	Stage Inspection By FES/QA Engineers
8.2.1	Apart from day-to-day inspection by BHEL Engineers stationed at Site and Customer's Engineers, stage inspection of equipments under erection and commissioning at various stages shall also be conducted by teams of Engineers from Field Engineering Services of BHEL's Manufacturing Units, Quality Assurance teams from Field Quality Assurance, Unit/Factory Quality Assurance and Commissioning Engineers from Technical Services etc. Contractor shall arrange all labour, tools and tackles etc.along with proper access for such stage inspections free of cost.
8.2.2	Any modifications suggested by BHEL FES and QA Engineers' team shall be carried out. Claims of contractor, if any, shall be dealt as per Section 13, and provided such modifications have not arisen for reasons attributable to the contractor.
8.3	Statutory Inspection of Work
8.3.1	The work to be executed under these specifications has to be offered for inspection, at appropriate stages of work completion, to various statutory authorities for compliance with applicable regulations. The work related statutory inspections, though not limited to, are as under: 1) Inspectorate of Steam Boilers and Smoke Nuisance 2) Electrical Inspector 3) Factory Inspector, Labour Commissioner, PF Commissioner and other authority connected to this project work

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	The scope includes getting the approvals from the statutory authorities, which includes arranging for inspection visits of statutory authority periodically as per BHEL Engineer's instructions, arranging materials for ground inspection, taking rub outs for the pressure parts to be offered for inspection, submitting co-related inspection reports, documents, radiographs etc and following up the matter with them. Contractor shall also make all arrangements for offering the Products / Systems for inspection at location, as applicable, to the concerned authority.
8.3.2	Contractor should be qualified to execute pressure parts & piping work coming under the purview of IBR, for which he should register himself with CIB of state concerned. contractor also should be aware of the latest IBR regulations and Electricity Act, including the amendments thereof.
8.3.3	Contractor shall comply with 'Qualification Tests for welders engaged in welding of Boilers and Steam Pipes under Construction, Erection and Fabrication at Site in India and in repairing Boilers and steam pipes by welding' in line with Chapter XIII of Indian Boiler Regulations-1950, for testing his welders / men / workers, including all associated fees, procedures, required instruments and equipments and their calibration there of. It shall be contractor's responsibility to obtain approval of Statutory Authorities, wherever applicable, for the conducting of any work which comes under the purview of these authorities, at his cost.
8.3.4	The following fees shall be excluded from scope of Contractor: 1. Registration Fee as per Regulation 385 of Chapter IX of Indian Boiler Regulations-1950 2. Fees for inspection of Boiler at the site of Construction as per Regulation 395 A, sl no 4 of Chapter IX of Indian Boiler Regulations-1950 However all other fees like visit fees charged by the Boiler Inspector and other arrangements for his visit or visits till satisfactory completion of work, shall be included in scope of Contractor
8.4	The Quality Management System of BHEL, Power Sector Regions (PSNR/PSER/PSWR/PSSR) have already been certified and accredited under ISO 9002 standards in this regard. The basic philosophy of the Quality Management System is to define the organizational responsibility, work as per

Bharat Heavy Electricals Limited

Power Sector – Eastern Region, Kolkata

VOLUME-ID

TENDER NO. PSER:SCT:RGN-S2098:21

PAGE24OF47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	documented procedures, verify the output with respect to acceptance norms, identify the non-conforming product/ procedure and take corrective action for removal of non-conformance specifying the steps for avoiding recurrence of such non-conformities, & maintain the relevant quality records. The nonconformities are to be identified through the conduct of periodical audit of implementation of quality systems at various locations/stages of work. Suppliers/vendors of various products/services contributing in the work are also considered as part of the quality management system. .as such the contractor is expected not only to conform to the quality management system of BHEL but also it is desirable that they themselves are accredited under any quality management system standard.
8.5	Field Quality Assurance
8.5.1	Contractor shall carry out all activities conforming to the approved Field Quality Plan (FQP) as revised from time to time. Total quality shall be the watchword of the work and contractor shall strive to achieve the quality standards, procedures laid down by BHEL. He shall follow all the instructions as per BHEL drawings and quality standards. Contractor shall provide the services of quality assurance engineer as per the relevant clauses.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.0	OCCUPATIONAL HEALTH, SAFETY & ENVIRONMENT MANAGEMENT/ QUALITY ASSURANCE PROGRAMME: BHEL, Power Sector Regions (PSNR/ER/WR/SR) are each certified for ISO 9001. Quality of work to customer's satisfaction and fulfillment of system requirements are the essence of ISO 9001 certification. BHEL, PS Regions have HSE certification (ISO 14001 & OHSAS 18001) and therefore Contractor also shall organise/ plan/ perform all their activities to meet with the applicable requirements of these standards.
9.1	HSE (Health, safety & Environment): Contractor will comply with HSE (Health, safety & Environment) requirements of BHEL. HSE requirements in brief, are given below :-
9.1.1	Contractor will nominate one of their qualified and experienced employees as Safety Officer, who will be responsible for all HSE related issues of contractors work area. Safety Officer will have authority to stop any activity, in case he observes that the activity is not being carried out in safe manner. He will conduct surprise inspection as well as periodic inspection/drill (at least once in a month) and submit such reports to BHEL. He will conduct periodic meetings with supervisors of different working groups and explain HSE issues and use of PPEs to them. Reports of such meetings will be submitted to BHEL. Contractor will develop suitable work procedures based upon HSE guidelines and OCPs and implement it. Such work procedures will consist of Area of work, T&P Details, Work Procedure, PPE requirements etc. Please refer Schedule VIII of BOCW Rules for number of safety officers, qualification, duties etc. Contractor should highlight the requirement of safety to staff and labour through daily tool box meeting before start of the days job. Contractor to also submit monthly safety reports as per the format/procedure of BHEL.
9.1.2	The contractor shall arrange induction and regular health check of their employees as per schedule VII of BOCW rules by aregistered medical practitioner. The contractor shall take special care of the employees affected with occupational diseases under rule 230 and schedule II of BOCW Rules. The employees not meeting the fitness requirement should not be engaged for such job
9.1.3	Following personnel protective equipments (PPEs), in adequate numbers, will

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	be made available at site & their regular use by all concerned will be ensured :-
	- HELMET
	- SAFETY GOGGLES & WELDING FACE SHIELDS
	- SAFETY BELTS AND PROTECTIVE NET FOR WORKING AT HEIGHT
	- SAFETY SHOES
	- EAR PLUG
	- ANY OTHER SAFETY EQUIPMENT REQUIRED FOR SAFE COMPLETION OF THE WORK
	Contractor to also submit monthly reports on above as per the format/procedure of BHEL.
9.1.4	Providing appropriate First Aid facilities for prompt treatment of injuries and illness at work place. Arranging training to contractor workmen/ employees for giving first aid.
9.1.5	Arranging ambulance in case of any emergency situation .
9.1.6	Identification of nearest hospital and health check-up of workmen/employees
9.1.7	Providing filtered drinking water at work place in cool container.
9.1.8	Providing Canteen, Rest Room, Washing facilities to the contracted employees as per provisions of Contract Labour Regulation Act 1970 (Chapter V).
9.1.9	Providing appropriate fire fighting equipment at designated work place and nominate a fire officer/warden adequately trained for his job.
9.1.10	Identification of nearest fire station and display contact telephone nos. / person's name around work places for cases of emergencies .
9.1.11	Providing adequate no. of 24 V sources and ensure that no hand lamps are operating at voltage level above 24 Volts.
9.1.12	Fulfilling safety requirements at all power tapping points.
9.1.13	Red & White caution tape of proper width(1.5 to 2 inch) to be used for cordoning unsafe area such as open trench, excavation area etc.
9.1.14	Providing contractors company logo on cloths /uniform/ proper identity cards with photographs, for correct identification of people working at project site .
9.1.15	High/ Low pressure welders to be identified with separate colourclothings. No welders will be deployed without passing appropriate tests and holding valid welding certificates. Approved welding procedure should be displayed at work place.
9.1.16	Displaying safe handling procedures for all chemicals such as lube oil, acid, alkali, sealing compounds etc , at work place .

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.1.17	All scaffolding/ platforms should be made from materials of appropriate quality/grade so that these are safe for use. It should be certified/declared safe for use by an experienced contractor person, before any scaffolding/platform is used. Please refer IS:3696 part 1&2 and 4014 part 1 & 2
9.1.18	All T&Ps/ MMEs should be of reputed brand/appropriate quality & must have valid test/calibration certificates bearing endorsement from competent authority of BHEL.. Contractor to also submit monthly reports of T&Ps deployed and validity test certificates to BHEL safety Officer as per the format/procedure of BHEL.
9.1.19	Ensure that the regulatory requirement of excessive weight limit (to carry/lift/ move weights beyond prescribed limits) for male and female workers are complied with.
9.1.20	Safety slogan, Safety/ Caution boards , wherever required to be displayed in consultation with BHEL.
9.1.21	Take suitable measures for waste management and environment related laws/legislation as a part of normal construction activities. Compliance with the legal requirements on storage/ disposal of paint drums (including the empty ones), Lubricant containers, Chemical Containers, and transportation and storage of hazardous chemicals will be strictly maintained. Ensure proper cleanliness of work place, housekeeping and waste management (including proper waste disposal) on daily basis.
9.1.22	It is imperative on the part of the contractor to join and effectively contribute in joint measures such as tree plantation, environment protection, contributing towards social upliftment, conversion of packing woods to school furniture, keeping good relation with local populace etc.
9.1.23	The contractor shall carry out periodic air and water quality check and illumination level checking in his area of work place and take suitable control measure.
9.1.24	The Contractor is required to provide proper safety net systems (IS-11057) where ever the hazard of fall from height is present as per instruction of BHEL Engineer. The safety nets shall be fire resistant, duly tested and shall be of ISI Mark and the nets shall be located as per site requirements to arrest or to reduce the consequences of a possible fall of persons working at different heights.
9.1.25	All applicable OCPs (Operational control procedures) will be followed by contractor as per BHEL instructions. This will be done as part of normal scope of work. List of such OCPs is given below . In case any other OCP is found to

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	be applicable during the execution of work at site, then contractor will follow this as well, within quoted rate. These OCPs (applicable ones) will be made available to contractor during work execution at site. However for reference purpose, these are kept with Safety Officer of BHEL at the Power Sector Regional HQ, or available in downloadable format in the website, which may be refereed by contractor, if they so desire.
■	OCP for safe handling of chemicals
■	OCP for Electrical safety
■	OCP for energy conservation
■	OCP for safe welding and gas cutting operation
■	OCP for fire safety
■	OCP for safety in use of hand tools
■	OCP for first aid
■	OCP for food safety at canteen
■	OCP for safety in use of cranes
■	OCP for storage and handing of gas cylinders
■	OCP for manual arc welding
■	OCP for safe use of helmets
■	OCP for good house keeping
■	OCP for working at height
■	OCP for safe excavation
■	OCP for safe filling of Hydrogen in cylinder
■	OCP for illumination
■	OCP for handling and erection of heavy metals
■	OCP for safe acid cleaning
■	OCP for safe alkali boil out
■	OCP for safe oil flushing
■	OCP for steam blowing
■	OCP for safe working in confined area
■	OCP for safe operation of passenger lift, material hoists & cages
■	OCP for Vehicle maintenance
■	OCP for safe radiography
■	OCP for waste disposal
■	OCP for working at night
■	OCP for blasting
■	OCP for DG Set
■	OCP for handling & storage of mineral wool

Bharat Heavy Electricals Limited Power Sector – Eastern Region, Kolkata		
VOLUME-ID	TENDER NO. PSER:SCT:RGN-S2098:21	PAGE29OF47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	■ OCP for drilling, reaming and grinding(machining) etc.
	■ OCP for hydraulic test
	■ OCP for spray insulation
	■ OCP for trial run of rotary equipment
	■ OCP for stress relieving
	■ OCP for material preservation
	■ OCP for cable laying/tray work
	■ OCP for electrical maintenance
	■ OCP for transformer charging
	■ OCP for safe handling of battery system
	■ OCP for computer operation
	■ OCP for storage in open yard
	■ OCP for sanitary maintenance
	■ OCP for batching
	■ OCP for piling rig operation
	■ OCP for gas distribution test
	■ OCP for cleaning of hotwell / deaerator
	■ OCP for electro-resistance heating
	■ OCP for compressor operation
	■ OCP for O&M of control of AC plant & system
	■ OCP for air compressor
	■ OCP for passivation
	■ OCP for Safe EDTA Cleaning
	■ OCP for Safe Chemical cleaning of Pre boiler system
	■ OCP for Safe Boiler Light up
	■ OCP for Safe Rolling and Synchronisation
	■ OCP for Safe Loading of Unit
9.2	SAFETY AND CLEANLINESS : The contractor shall take all necessary safety precautions and arrange for appropriate appliances as per discretion of BHEL or its authorised officials (Site Construction Manager) to prevent loss of human lives, injuries, to personnel engaged and damage to property. Before commencing the work, the contractor shall submit a "Safety Plan" to the above authorised BHEL official and obtain approval on the same. The safety plan shall indicate in detail the measures that would be taken by the contractor to ensure safety of men, equipment, materials and environment during execution of the work. This will also include an organization structure, role and responsibilities of the concerned key

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	personnel, the safety practices that will be followed, PPEs deployed, plan for handling critical activities and emergencies.
9.3	If the contractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instructions issued by the authorised BHEL official, BHEL shall have the right to take corrective steps at the risk and cost of the contractor.
9.4	During the course of construction, alternation or repairs, scrap with protruding nail, sharp edge etc and all other debris shall be kept clean from working areas, passage, ways and stairs in and around site.
9.5	Combustible scrap and debris shall be removed at regular intervals during the course of execution. Safe means shall be provided to facilitate such removal. The combustible scrap should be stored in safe place away from the plant materials to avoid fire accidents. The area shall be chosen in consultation with the Engineer and to be cordoned off.
9.6	Rigging equipment for materials handling shall be inspected prior to use in each shift and as necessary during its use to ensure that it is safe. Defective rigging equipment will be removed from service.
9.7	Rigging equipment shall not be loaded in excess of its recommended safe working load. Rigging equipment, when not in use, shall be removed from the original work area so as not to present a hazard to employees.
9.8	Contractor shall notify the engineer, of his intention to bring on to site any equipment or any container, with liquid or gaseous fuel or other substance which may create a hazard. The Engineer shall have the right to prescribe the condition under which such equipment or container may be handled and used during the performance of the works and the contractor shall strictly adhere to such instructions. The Engineer shall have the right to inspect any construction tool and to forbid its use, if in his opinion it is unsafe. No claim due to such prohibition will be entertained.
9.9	Where it is necessary to provide and/or store petroleum products or petroleum mixture & explosives, the contractor shall be responsible for carrying out such provision / storage in accordance with the rules & regulations laid down in the relevant petroleum act, explosive act and petroleum and carbide of calcium manual, published by the chief inspector of explosives of India. All such storage shall have prior approval if necessary from the chief inspector of explosives or any other statutory authority. The contractor shall be responsible for obtaining

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	the same.
9.10	Cylinders shall be moved by tilting and rolling them on their bottom edges. They shall not be intentionally dragged, struck or permitted to strike each other violently.
9.11	When cylinders are transported by powered vehicle they shall be secured in a vertical position.
9.12	All workmen of the contractor working on construction area shall wear safety shoes, hand gloves, safety helmets and safety belt as applicable. The contractor shall provide to its workforce and ensure the use of following personnel protective equipment as found necessary and as directed by BHEL.
9.12.1	Safety Helmets conforming to IS-2925 : 1984
9.12.2	Safety Belts conforming to IS-3521:1983
9.12.3	Safety Shoes conforming to IS-1989 : 1978
9.12.4	Eye and face protection devices conforming to IS – 1179:1967, IS 5983:1980, IS 8521 Part 1:1977, IS 8521 Part 2: 1994.
9.12.5	Hand and body protection devices conforming to IS 4770:1991 and IS- 6994 : Part 1: 1973, IS – 8619 : 1977
9.12.6	Ear protection IS-9167:1979
9.12.7	Respiratory Protective Devices as per IS-9473:2002, i4746:1999 and 14166:1994
9.13	The contractor shall insure his workmen against all accidents and the policy shall be presented to BHEL Engineer on demand. Other wise, BHEL will arrange the same and the expenditure towards this will be debited to the contractor. In case of a fatal or disabling injury accident to any person at construction site due to lapses by the contractor, the victim and/or his/her dependants shall be compensated by the contractor as per statutory requirements. However, if considered necessary BHEL shall have the right to impose appropriate financial penalty on contractor and recover the same from payments due to the contractor for suitably compensating the victim and/or his/her dependence before imposing any such penalty. Appropriate enquiry shall be held by BHEL giving opportunity to the contractor for presenting his case. Above safety conditions are not exhaustive but gives an idea for the contractor and contractor shall adhere to all safety precaution given by the

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	Engineer at site.
9.14	The contractor shall arrange at his cost adequate lighting facilities e.g. flood lighting, hand lamps, area lighting etc. at various levels for safe and proper working operations during night hours at the work spot as well as at the pre-assembly area.
9.15	The contractor shall be responsible for provision of all the safety notices and safety equipment as enjoined on him by the application of relevant statutory regulation / provisions and/or as called upon by BHEL from time to time. He shall be held responsible for any violation of statutory regulations (local, state or central) and BHEL instruction that may endanger safety of men, equipment and material.
9.16	The contractor shall provide temporary fencing wherever required as a safety measure against accident and damage to properties. Suitable caution notices shall be displayed where access to any part is found to be unsafe and hazardous.
9.17	Contractor shall ensure safety of all the workmen, material and equipment either belonging to him or to others working at site. He shall observe safety rules and codes applied by BHEL without exception.
9.18	It will be the responsibility of the contractor to ensure safe lifting of the equipment, taking due precaution to avoid any accident and damage to other equipment and personnel. All requisite tests and inspection of handling equipment, tools & tackle shall be periodically done by the contractor by engaging only the COMPETENT PERSONS as per law. Defective equipment or uncertified shall be removed from service. Any equipment shall not be loaded in excess of its recommended safe working load.
9.19	The contractor shall provide necessary first aid facilities as per schedule III. In addition, ambulance facilities, OHC and CMO as per schedule IV, V, X and XI of BOCW Rules as applicable for all his employees, representatives and workmen at site and BHEL shall have no obligation in this regard. The first aid boxes should be placed at various elevations so as to make them available within the reach and at the quickest possible time. The contractor should conduct periodical first –aid classes to keep his supervisor and Engineers properly trained for attending to any emergency.
9.20	Training

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.20.1	The contractor shall arrange induction safety training for all employees before assigning work. In addition, awareness programme, mock drill at regular intervals and daily tool box meetings shall be arranged. Monthly report of the above to be given to BHEL safety Officer as per prescribed BHEL formats
9.20.2	All the contractor's supervisory personnel and sufficient number of workers shall be trained for fire protection systems. Enough number of such trained personnel must be available during the tenure of contract. Contractor should nominate his supervisor to coordinate and implement the safety measures.
9.21	Contractor shall provide enough fire protecting equipment of the types and numbers at his office, stores, temporary structure in labour colony etc. Such fire protection equipment shall be easy and kept open at all times. The fire extinguishers shall be properly refilled and kept ready which should be certified at periodic intervals. The date of changing should be marked on the Cylinders. All other fire safety measures as laid down in the "codes for fire safety at construction site" issued by safety coordinator of BHEL shall be followed. Non-compliance of the above requirement under fire protection shall in no way relieve the contractor of any of his responsibility and liabilities to fire accident occurring either to his materials or equipment or those of others. Emergency contacts nos must be displayed at prominent locations
9.22	The contractor shall at his cost, remove from vicinity of work at least once each day all combustible waste, scrap, painting materials, rubbish, unused or other materials and deposit them in places specified by BHEL to keep the work site clear and tidy. Use of undercoated canvas paper, corrugated paper, fabricated carton, plastic or other flammable materials shall be restricted to the minimum and promptly removed.
9.23	The contractor shall not use any hand lamp energized by Electric power with supply voltage of more than 24 volts in confined spaces like inside water boxes, turbine casings, condensers etc.
9.24	All portable electric tools used by the contractor shall have safe plugging system to source of power and be appropriately earthed. Only electricians licensed by appropriate statutory authority shall be employed by the contractor to carry out all types of electrical works. Details of earth resource and their test date to be given to BHEL safety officer as per the prescribed formats of BHEL
9.25	In case of any delay in completion of a job due to mishaps attributable to lapses by the contractor, BHEL shall have the right to recover cost of such delay from

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	the payments due to the contractor, after notifying the contractor suitably.
9.26	Valve protection caps shall be kept in place and secured.
9.27	The contractor shall be responsible for the safe storage and handling of his radio-active sources as per BARC rules and regulations.
9.28	Tarpaulin being inflammable should not be used (instead, only non infusible covering materials shall be used) as protective cover while preheating, welding, stress relieving etc. at site.
9.29	If the contractor fails to improve the standards of safety in its operation to the satisfaction of BHEL after being given reasonable opportunity to do so and/or if the contractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instruction regarding safety issued by BHEL, BHEL shall have the right to take corrective steps at the risk and cost of the contractor after giving a notice of not less than 7 days indicating the steps that would be taken by BHEL.
9.30	If the contractor succeeds in carrying out its job in time with out any fatal or disabling injury accident and without any damage to property BHEL may, at its sole discretion, favorably consider to reward the contractor suitably for the performance.
9.31	The contractor shall carefully follow the safety requirement of BHEL/ the purchaser with the regard to voltages used in critical areas.
9.32	The contractor shall use only properly insulated and armored cables which conform to the requirement of Indian Electricity Act and Rules for all wiring, electrical applications at site. BHEL reserves the right to replace any unsafe electrical installations, wiring, cabling etc. at the cost of the contractor. All electrical appliances used in the work shall be in good working condition and shall be properly earthed. No maintenance work shall be carried out on live equipment. The contractor shall maintain adequate number of qualified electricians to maintain his temporary electrical installations. Area wise Electrical safety inspection is to be carried out on monthly basis as per "Electrical Safety Inspection checklist" and the report is to be submitted to BHEL safety officer
9.33	The contractor shall arrange adequate number of persons specifically for clearing any debris and for house keeping of the erection area including restacking of components in the erection areas. Housekeeping to be carried out

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	as per BHEL's checklist and report is to be submitted to BHEL safety officer
9.34	In case of any damage to property due to lapses by the contractor, BHEL shall have the right to recover the cost of such damages from the contractor after holding an appropriate enquiry.
9.35	The contractor shall submit report of all accidents, fires and property damage etc to the Engineer immediately after such occurrence, but in any case not later than 24 hours of the occurrence. Such reports shall be furnished in the manner prescribed by BHEL. In addition periodic reports on safety shall also be submitted by the contractor to BHEL from time to time as prescribed by the Engineer. Compiled monthly reports of all kinds of accidents, fires and property damage to be submitted to BHEL safety officer as per prescribed formats
9.36	Before commencing the work, the contractor shall appoint/nominate a responsible person to supervise implementation of all safety measures and liaison with his counterpart of BHEL.
9.37	Suitable scaffolds shall be provided for workman for all works that cannot safely be done from the ground, or from solid construction except in the case of short duration of work which can be done safely from ladders. When a ladder is used, it shall be of rigid construction made of steel. The steps shall have a minimum width of 45 cm and a maximum rise of 30 cm. Suitable handholds of good quality wood or steel shall be provided and the ladder shall be given an inclination not steeper than $\frac{1}{4}$ horizontal and 1 vertical.
9.38	Scaffolding or staging more than 3.6 m above the ground floor, swung or suspended from an overhead support or erected with stationery support shall have a guard rail properly bolted, braced or otherwise secured, at least 90 cm above the floor or platform of such scaffolding or staging and extending along the entire length of the out side and ends thereof with only such openings as may be necessary for the delivery of materials. Such scaffolding or staging shall be so fastened as to prevent it from savor, from swaying, from the building or structure.
9.39	Working platforms, gangways and stairways shall be so constructed that they do not sag unduly or unequally and if the height of the platform gangways provided is more than 3.6 m above ground level or floor level, they shall be closely boarded and shall have adequate width which shall not be less than 750 mm and be suitably fenced as described above.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.40	Every opening in the floor or a building or in a working platform shall be provided with suitable means to prevent the fall of persons or materials by providing suitable fencing or railing whose minimum height shall be 90 cm.
9.41	Wherever there are open excavation in ground, they shall be fenced off by suitable railing and danger signals installed at night so as to prevent persons slipping into the excavations.
9.42	Safe means of access shall be provided to all working places. Every ladder shall be securely fixed. No portable single ladder shall be over 9 m in the length while the width between side rails in rung ladder shall in no case be less than app. 29.2 cm for ladder upto and including 3 m in length. For longer ladders this width shall be increased at least ¼" for each additional foot of length.
9.43	A sketch of the ladders and scaffolds proposed to be used shall be prepared and approval of the Engineer obtained prior to Construction.
9.44	All personnel of the Contactor working within the plant site shall be provided with safety helmets. All welders shall wear welding goggles while doing welding work and all metal worker shall be provided with safety gloves. Persons employed on metal cutting and grinding shall wear safety glasses.
9.45	Adequate precautions shall be taken to prevent danger for electrical equipment. No materials on any of the sites of work shall be so stacked or placed as to cause danger or inconvenience to any person or the public.
9.46	All trenches, four feet or more in depth, shall at all times be supplied with at least one ladder for each 30 m in length or fraction thereof. The ladder shall be extended from bottom of the trench to at least 90 cm above the surface of the ground. Sides of the trenches which are 1.50 m or more in depth shall be stepped back to give suitable slope or securely held by timer bracing, so as to avoid the danger of sides collapsing. The excavated materials shall not be placed within 1.5 m of the edges of the trench or half of the depth of the trench whichever is more. Cutting shall be done from top to bottom. Under no circumstances undermining or undercutting shall be done.
9.47.1	The contractor shall take permission of BHEL prior to risky jobs such as working at height, hot work, liftig activities, etc through permits. No job should be started without permits.
9.47.2	The Contactor shall take all measures at the sites of the work to protect all persons from accidents and shall be bound to bear the expenses of defense of

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	every suit, action or other proceeding at law that may be brought by any persons for injury sustained or death owing to neglect of the above precautions and to pay any such persons such compensation or which may with the consent of the Contractor be paid to compromise any claim by any such person should such claim proceeding be filed against BHEL, the Contractor hereby agrees to indemnify BHEL against the same.
9.48	Before any demolition work is commenced and also during the process of the work the following shall be ensured:
9.48.1	All roads and open areas adjacent to the work site shall either be closed or suitably protected.
9.48.2	No electric cable or apparatus which is liable to be a source of danger nor a cable or an apparatus used by the operator shall remain electrically charged.
9.48.3	All practical steps shall be taken to prevent danger to persons employed from the risks of fire or explosion or flooding. No floor, roof or other part of the building shall be so overloaded with debris or materials as to render them unsafe.
9.49	All necessary personnel safety equipment as considered adequate by the Engineer should be kept available for the use of the persons employed in the Site and maintained in a condition suitable for immediate use and the Contractor should take adequate steps to ensure proper use of equipment by those concerned.
9.49.1	Workers employed on mixing asphalted materials, cement and lime mortars shall be provided with protective foot wear and protective goggles.
9.49.2	Those engaged in white washing and mixing or stacking of cement bags or any materials which is injurious to the eyes shall be provided with protective goggles.
9.49.3	Those engaged in welding works shall be provided with welder's protective eyesight lids.
9.49.4	Stone breakers shall be provided with protective goggles and protective clothing and seated sufficient to safe intervals.
9.49.5	Where workers are employed in sewers and manholes, which are in use, the Contractor shall ensure that the manhole covers are opened and ventilated at least for an hour before the workers are allowed to get into manhole, and the manholes so opened shall be cordoned off with suitable railing and provided

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	with warning signals or boards to prevent accident to the public.
9.49.6	The Contractor shall not employ men below the age of 18 years and women on the work of painting with products containing lead in any form. Wherever men above the age of 18 are employed on the work of lead painting, the following precautions should be taken.
9.49.6.1	No paint containing lead or lead products shall be used except in the form of paste or ready made paint.
9.49.6.2	Suitably face masks should be supplied for use by the workers where paints are applied in the form of spray or a surface having lead paint dry rubbed and scrapped.
9.49.6.3	Overalls shall be supplied by the Contractor to the workmen and adequate facilities shall be provided to enable the working painters to wash during the cessation of work.
9.50	When the work is being done near any place where there is risk of drowning all necessary equipment should be provided and kept ready for use and all necessary steps taken for prompt rescue of any person in danger and adequate provision should be made for prompt first aid treatment of all injuries likely to be sustained during the course of the work.
9.51	Motors, gearing, transmission, electric wiring and other dangerous parts of hoisting appliances should be provided with efficient safe guards. Hoisting appliance should be provided with such means as will reduce to the minimum the risk of any part of a suspended load becoming accidentally displaced. When workers employed on electrical installations which are already energized, insulting mats, wearing apparel, such as gloves, sleeves and boots as may be necessary should be provided. The worker should not wear any rings, watches and carry keys or other materials which are good conductor of electricity.
9.52	All scaffolds, ladders and other safety devices mentioned or described herein shall be maintained in safe condition and no scaffold, ladder or equipment shall be altered or removed while it is in use. Adequate washing facilities should be provided at or near the places of work.
9.53	The contractor shall maintain and ensure necessary safety measures as required for inspection and tests HV test, Pneumatic test, Hydraulic test, Spring test, Bend test etc as applicable, to enable inspection Agency for performing Inspection. If any test equipment is found not complying with proper safety

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	requirements then the Inspection Agency may withhold inspection, till such time the desired safety requirements are met.
9.54	The Contractor shall notify BHEL of his intention to bring to site any equipment or material which may create hazard. BHEL shall have the right to prescribe the conditions under which such equipment or materials may be handled and the contractor shall adhere to such instructions. BHEL may prohibit the use of any construction machinery, which according to him is unsafe. No claim for compensation due to such prohibition will be entertained by BHEL.
9.55	All safety precautions shall be taken for welding and cutting operations as per IS-818. All safety precautions shall be taken for foundation and other excavation marks as per IS-3764.
9.56	.All gas cylinders shall be stored in upright position. Suitable trolley shall be used. There shall be flash-back arrestors conforming to IS-11006 at both cylinder and burner ends. Damaged tube and regulators must be immediately replaced. No of cylinders shall not exceed the specified quantity as per OCP
9.57	These safety provisions should be brought to the notice of all concerned by display on a notice board at a prominent, place at work spot. The persons responsible for compliance of the safety code shall be named therein by the Contractor
9.58	To ensure effective enforcement of the rules and regulations relating to safety precautions the arrangement made by the contract shall be open to inspection by the Engineer of the Engineer's Representative.
9.59	Keeping the work area clean/ free from debris, removed scaffoldings, scraps, insulation/sheeting wastage /cut pieces, temporary structures, packing woods etc. will be in the scope of the contractor. Such cleanings has to be done by contractor within quoted rate, on daily basis by an identified group. If such activity is not carried out by contractor / BHEL is not satisfied, then BHEL may get it done by other agency and actual cost alongwith BHEL overheads will be deducted from contractor's bill. Such decisions of BHEL shall be binding on the contractor.
9.60	Notwithstanding the above clauses there is nothing to exit the Contractor from the operations of any other Act or Rule in force in area of work in this respect. Provided always that all safety measures apart from those specifically provided in this agreement which are brought to the notice of the Contractor from time to time by the Engineer shall be complied by the Contractor. Provided further that

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	all consequences, damages, or losses arising by reason of any safety code shall be met with by the Contractor.																																																																
9.61	<u>NON COMPLIANCE:-</u> NONCONFORMITY OF SAFETY RULES AND SAFETY APPLIANCES WILL BE VIEWED SERIOUSLY AND BHEL HAS RIGHT TO IMPOSE FINES ON THE CONTRACTOR AS UNDER <u>for every instance of violation noticed:</u> <table border="1"> <thead> <tr> <th>SN</th><th>Violation of Safety Norms</th><th>Fine (in Rs)</th></tr> </thead> <tbody> <tr><td>01</td><td>Not Wearing Safety Helmet</td><td>50/- *</td></tr> <tr><td>02.</td><td>Not wearing Safety Belt or not anchoring life line</td><td>100/-*</td></tr> <tr><td>03</td><td>Not wearing safety shoe</td><td>100/-*</td></tr> <tr><td>04</td><td>Not keeping gas cylinders vertically</td><td>100/-</td></tr> <tr><td>05</td><td>Not using flash back arrestors</td><td>50/-</td></tr> <tr><td>06</td><td>Not wearing gloves</td><td>50/- *</td></tr> <tr><td>07.</td><td>Grinding Without Goggles</td><td>50/- *</td></tr> <tr><td>08.</td><td>Not using 24 V Supply For Internal Work</td><td>500/-</td></tr> <tr><td>09.</td><td>Electrical Plugs Not used for hand Machine</td><td>100/-</td></tr> <tr><td>10.</td><td>Not Sliding property</td><td>200/-</td></tr> <tr><td>11.</td><td>Using Damaged Sling</td><td>200/-</td></tr> <tr><td>12.</td><td>Lifting Cylinders Without Cage</td><td>500/-</td></tr> <tr><td>13.</td><td>Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.</td><td>200/-</td></tr> <tr><td>14.</td><td>Not Removing Small Scrap From Platforms</td><td>200/-</td></tr> <tr><td>15.</td><td>Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting</td><td>200/-</td></tr> <tr><td>16.</td><td>Not Maintaining Electric Winches Which are Operated Dangerously</td><td>500/-</td></tr> <tr><td>17.</td><td>Improper Earthing Of Electrical T&P</td><td>500/-</td></tr> <tr><td>18</td><td>No or improper barricading</td><td>500/-</td></tr> <tr><td>19.</td><td>Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)</td><td>1000/-</td></tr> <tr><td>20.</td><td>Accident Resulting in Partial Loss in Earning Capacity</td><td>25,000/- per victim</td></tr> </tbody> </table>		SN	Violation of Safety Norms	Fine (in Rs)	01	Not Wearing Safety Helmet	50/- *	02.	Not wearing Safety Belt or not anchoring life line	100/-*	03	Not wearing safety shoe	100/-*	04	Not keeping gas cylinders vertically	100/-	05	Not using flash back arrestors	50/-	06	Not wearing gloves	50/- *	07.	Grinding Without Goggles	50/- *	08.	Not using 24 V Supply For Internal Work	500/-	09.	Electrical Plugs Not used for hand Machine	100/-	10.	Not Sliding property	200/-	11.	Using Damaged Sling	200/-	12.	Lifting Cylinders Without Cage	500/-	13.	Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.	200/-	14.	Not Removing Small Scrap From Platforms	200/-	15.	Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting	200/-	16.	Not Maintaining Electric Winches Which are Operated Dangerously	500/-	17.	Improper Earthing Of Electrical T&P	500/-	18	No or improper barricading	500/-	19.	Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)	1000/-	20.	Accident Resulting in Partial Loss in Earning Capacity	25,000/- per victim
SN	Violation of Safety Norms	Fine (in Rs)																																																															
01	Not Wearing Safety Helmet	50/- *																																																															
02.	Not wearing Safety Belt or not anchoring life line	100/-*																																																															
03	Not wearing safety shoe	100/-*																																																															
04	Not keeping gas cylinders vertically	100/-																																																															
05	Not using flash back arrestors	50/-																																																															
06	Not wearing gloves	50/- *																																																															
07.	Grinding Without Goggles	50/- *																																																															
08.	Not using 24 V Supply For Internal Work	500/-																																																															
09.	Electrical Plugs Not used for hand Machine	100/-																																																															
10.	Not Sliding property	200/-																																																															
11.	Using Damaged Sling	200/-																																																															
12.	Lifting Cylinders Without Cage	500/-																																																															
13.	Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.	200/-																																																															
14.	Not Removing Small Scrap From Platforms	200/-																																																															
15.	Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting	200/-																																																															
16.	Not Maintaining Electric Winches Which are Operated Dangerously	500/-																																																															
17.	Improper Earthing Of Electrical T&P	500/-																																																															
18	No or improper barricading	500/-																																																															
19.	Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)	1000/-																																																															
20.	Accident Resulting in Partial Loss in Earning Capacity	25,000/- per victim																																																															

Bharat Heavy Electricals Limited

Power Sector – Eastern Region, Kolkata

VOLUME-ID	TENDER NO. PSER:SCT:RGN-S2098:21	PAGE41OF47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	21.	Fatal Accident/Accidents Resulting in total loss in Earning Capacity	1,00,000/- per victim #
	Legend:-*: per head, #: or as deducted by Customer whichever is higher Any other non-conformity noticed not listed above will also be fined as deemed fit by BHEL. The decision of BHEL engineer is final on the above. The amount will be deducted from running bills of the contractor. The amount collected above will be utilized for giving award to the employees who could avoid accident by following safety rules. Also the amount will be spent for purchasing the safety appliances and supporting the safety activity at site.		
9.61	CITATION:-If safety record of the contractor in execution of the awarded job is to the satisfaction of safety department of BHEL, issue of an appropriate certificate to recognize the safety performance of the contractor may be considered by BHEL after completion of the job		
9.62	MEMORANDUM OF UNDERSTANDING After Award Of Work, Contractors Are Required To Enter Into A Memorandum Of Understanding As Given Below: <u>Memorandum of Understanding</u> ➤ BHEL, Power Sector _____ Region is committed to Health, Safety and Environment Policy (EHS Policy). ➤ M/s _____ do hereby also commit to the same EHS Policy while executing the Contract Number _____ ➤ M/s _____ shall ensure that safe work practices not limited to the above are followed by all construction workers and supervisors. Spirit and content therein shall be reached to all workers and supervisors for compliance. ➤ BHEL will be carrying out EHS audits twice a year and M/s _____ shall ensure to close any non-conformity observed/reported within fifteen days. Signed by authorized representative of M/s -----		

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter - IX: HSE & OHSAS

	Name : Place & Date:

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-X: RA Bill Payments

10.0	RA Bill Payments
10.1	The contractor shall submit his monthly RA bills with all the details required by BHEL on specified date every month covering progress of work in all respects and areas for the previous calendar month.
10.2	Mode of payment and measurement of work completed shall be as per relevant clauses of General Conditions of Contract
10.3	Release of payment in each running bill including PVC Bills where ever applicable will be restricted to 95% of the value of work admitted as per stages of progressive pro rata payments.
10.4	The 5% thus remaining shall be treated as 'Retention Amount' and shall be released as per terms specified in the General Conditions of Contract.
10.5	The payment for running bills will normally be released within 30 days of submission of running bill complete in all respects with all documents. It is the responsibility of the contractor to make his own arrangements for making timely payments towards labour wages, statutory payments, outstanding dues etc and other dues in the meanwhile. In case of Civil works, 60% of RA Bills complete and correct in all respects and certified by BHEL Engineer, shall be paid within 15 days of receipt. Balance payment shall be within 30 days.
10.6	BHEL shall release payment through Electronic Fund Transfer (EFT)/RTGS. In order to implement this system, Contractor to furnish details pertaining to his Bank Accounts where proceeds will be transferred through BHEL's banker, as per prescribed formats: Note: BHEL may also choose to release payment by other alternative modes as applicable
10.7	Paying Authority shall be the Construction Manager of the Site. Any change in the paying Authority shall be intimated to the Contactor accordingly.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-XI : Performance Monitoring

11.0	Performance Monitoring
11.1	Performance of the contractor is monitored through various reports/reviews and shall be jointly evaluated every month for unit wise identified packages as per prescribed formats. Based on the net weighted scores obtained, Contractors shall be rated 'Good' or 'Satisfactory' or 'Unsatisfactory'
11.2	In case of any dispute on performance rating and the contractor refuses to sign on the performance rating given by BHEL package Incharge, the same shall be reviewed by BHEL site Incharge/Construction Manager and his decision shall be final.
11.3	Release of RA Bills will be contingent upon joint evaluation of performance
11.4	Performance of the contractor will be taken into consideration for assessing the capacity of the bidder to execute future jobs under tender, as detailed in the Notice Inviting Tender. Risk of non evaluation or non availability of the Monthly performance evaluation reports is to be borne by the Bidder.
11.5	In case of 'Unsatisfactory performance' for a continuous period of three or more months for a package or packages, BHEL has the right to get the balance works executed at the risk and cost of the contractor.
11.6	In case of 'Unsatisfactory performance' in a financial year, BHEL reserves the right to put on hold such Contractors for a period of six months for similar package or similar packages

SPECIAL CONDITIONS OF CONTRACT (SCC)


Chapter-XII: Suspension of Business Dealings

12.0	Suspension of Business dealings
12.1	BHEL reserves the right to take action against contractors who fail to perform or indulge in malpractices, by suspending business dealings with them.
12.2	Suspension could be in the form of 'Hold', 'De-listing' or 'Banning' a contractor.
12.3	A bidder may be put on HOLD for a period of 6 months, for future tenders for specific works on the basis of one or more of the following reasons: a) Bidder does not honour his own offer or any of its conditions within the validity period. b) Bidder fails to respond against three consecutive enquires of BHEL. c) After placement of order, Bidder fails to execute a contract. d) Bidder fails to settle sundry debt account, for which he is legitimately liable, within one year of its occurrence. e) Bidder's performance rating falls below 60% in specific category (more fully described in chapter 'Performance Monitoring') f) Bidder works are under strike/ lockout for a long period.
12.4	A Bidder may be de-listed from the list of registered Bidders of the region for a period of 1 year on the basis of one or more of the following reasons:- a) Bidder tampers with tendering procedure affecting ordering process or commits any misconduct which is contrary to business ethics. b) Bidder has substituted, damaged, failed to return, short returned or unauthorizedly disposed off materials/ documents/ drawings/ tools etc of BHEL. c) Bidder no longer has the technical staff, equipment, financial resources etc. required to execute the orders/ contracts.
12.5	A Bidder can be banned from doing any business with all Units of BHEL for a period of 3 years on the basis of one or more of the following reasons: a) Bidder is found to be responsible for submitting fake/ false/ forged documents, certificates, or information prejudicial to BHEL's interest. b) In spite of warnings, the Bidder persistently violates or circumvents the provisions of labour laws/ regulations/ rules and other statutory requirements. c) Bidder is found to be involved in cartel formation

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-XII: Suspension of Business Dealings

	d) The Bidder has indulged in malpractices or misconduct such as bribery, corruption and fraud, pilferage etc which are contrary to business ethics. e) The Bidder is found guilty by any court of law for criminal activity/ offences involving moral turpitude in relation to business dealings. f) The Bidder is declared bankrupt, insolvent, has wound up or been dissolved; i.e ceases to exist for all practical purposes. g) Bidder is found to have obtained Official Company information/ documentation by questionable means. h) Communication is received from the administrative Ministry of BHEL to ban the Bidder from business dealings.
12.6	Contracts already entered with a contractor before the date of issue of order of 'HOLD' or 'DE-LISTING' shall not be affected.
12.7	All existing contracts with a 'BANNED' contractor shall normally be short closed
12.8	Once the order for suspension is passed, existing offers/new offers of the contractor shall not be entertained
12.9	The above guidelines are not exhaustive but enunciate broad principles governing action against contractors

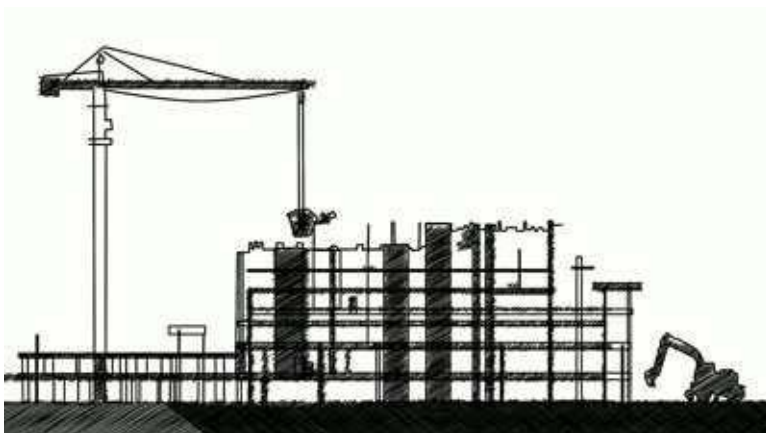

HEALTH, SAFETY and ENVIRONMENT PLAN

For

SITE OPERATIONS

By

SUB-CONTRACTORS

POWER SECTOR- EASTERN REGION

 PS-ER	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER
		Rev.: 01
		Date: 08.05.20
		Page 2 of 170

DOCUMENT ISSUE SHEET

	PREPARED BY	APPROVED BY
NAME	Saswajeet Rout	Bishwanath Tirkey
DESIGNATION	Senior Engineer (HSE), PSER-HQ, Kolkata	Addl. GM (HSE), PSER-HQ, Kolkata
SIGNATURE		
ISSUED BY: Saswajeet Rout, Sr. Engineer (HSE), PSER-HQ, Kolkata		
ISSUED TO: All sites of BHEL-PSER		
COPY NO: E-Copy		
DATE OF ISSUE: 08.05.2020		

THIS PLAN SUPERSEDES THE STANDARD HSE PLAN

HSE PLAN FOR SITE OPERATIONS BY BHEL'S SUBCONTRACTORS AT A GLANCE

BEFORE START	SIGNING OF MOU	
	Agree to comply to HSE requirement- Statutory and BHEL's	Agree to accept BHEL's decision on release of 1.5% (as specified in the contract) of Gross bill Amount or part thereof or otherwise (non-release), based on our HSE performance as evaluated by BHEL during the execution period
PLAN	HSE ORGANISATION	
	Manpower 1 (one) safety officer for every 300 workers or part thereof 1(one) safety-supervisor for every 150 workers 1(one) safety-steward/ supervisor for every 50 workers As per Cl. 7.1	HSE Roles and responsibilities - All employees as per 7.2.1 - Site In-charge & Package In-charges- As per clause 7.2.2 - Safety officer- As per clause 7.2.3
	HSE Planning for Man, Machinery / Equipment/ Tools & Tackles	
PROVIDE	HSE INFRASTRUCTURE	
	- PPEs - Drinking Water - Washing Facilities - Latrines and Urinals - Provision of shelter for rest - Medical facilities	- Canteen facilities - Labor Colony - Emergency Vehicle - Pest Control - Scrapyard - Illumination - Crèches (if required)
TRAIN	HSE TRAINING , AWARENESS & PROMOTION	
	Training - Induction training - Height work and other critical areas - Tool Box talk & Pep Talk - Job Specific Training	Awareness & Promotion - Posters & Signage - Emergency Contact/Information Display - Banner - Competition & Awards
COMMUNICATE	HSE COMMUNICATION	
	Incident Reporting - Accident- Fatal, Major & Minor - Property damage - Near Miss Safety Performance Reporting	Event Reporting - Celebrations - Training - Medical camp - Motivational Activities

EXECUTE SAFELY	SAFETY DURING WORK EXECUTION	
	PERMIT TO WORK Height work (above 2 meters), Hot Work, Heavy Lifting, Confined Space, Radiography, Excavation (More than 1.22 meters), Lockout / Tag out	
	OPERATIONAL CONTROL	
	• Welding, Gas Cutting Grinding • Rigging, Signaling • Cylinder- Storage & Movement • Demolition work • T&Ps • Chemical Handling • Electrical works • Painting	• Fire • Scaffolding • Height work • Working Platform • Excavation / Civil Work • Ladder • Lifting • Hoisting appliance • Hard Barricading
	HOUSE KEEPING WASTE MANGEMENT TRAFFIC MANAGEMENT ENVIRONMENTAL CONTROL EMERGENCY PREPAREDNESS AND RESPONSE PLANNING	
CHECKS	HSE AUDITS & INSPECTION	
	• Daily Checks • Inspection of Height work • Inspection of PPEs • Inspection of T & Ps	• Inspection of Cranes & Winches • Inspection of Welding and Gas cutting • Inspection of elevators etc.
NON CONFORMANCE	HSE PERFORMANCE EVALUATION PARAMETERS	
	PENALTY for NON CONFORMANCE Refer Clause 16 Incremental penalty For repeated violation by the same person, the penalty would be double of the previous penalty For repeated fatal incident in the same contract / package, incremental penalty to be imposed. The subcontractor will pay 2 times the penalty compared to the previously paid in case there are repeated cases of fatal incidents under the same subcontractor for the same package in the same unit.	
	COMPENSATION TO ACCIDENT VICTIMS Refer Clause 17 Employee Compensation Act, 1922 Other Acts and Guidelines relevant to employee compensation	

ORGANIZATION OF THIS DOCUMENT

- **GENERAL SECTION**
- **SECTION A:**
MAIN REQUIREMENTS APPLICABLE IN FULL
- **SECTION B:**
SPECIAL REQUIREMENTS
- **ANNEXES**

CONTENTS

S. No.	Description	Page No.
GENERAL		
1	PURPOSE	9
2	SCOPE	9
3	OBJECTIVES AND TARGETS	10
4	REFERENCES	11
5	HEALTH, SAFETY & ENVIRONMENT POLICY	12
	MEMORANDUM OF UNDERSTANDING	13
6	TERMS & DEFINITIONS	14
SECTION-A		
7	HSE ORGANIZATION	17
7.1	DEPLOYMENT (NUMBERS, QUALIFICATIONS & EXPERIENCE)	17
7.2	HSE RESPONSIBILITIES	19
8	PLANNING BY SUBCONTRACTOR	23
8.1	MOBILISATIONOF MACHINERY/EQUIPMENT/TOOLS	23
8.2	MOBILISATION OF MANPOWER BY SUBCONTRACTOR	24
8.3	PROVISION OF PPEs	25
8.4	ARRANGEMENT OF INFRASTRUCTURE	26
9	HSE TRAINING & AWARENESS	32
10	HSE PROMOTION – SIGNAGE,POSTERS, COMPETITIONS, AWARDS ETC	34
11	HSE COMMUNICATION & PARTICIPATION	35
12	INCIDENT INVESTIGATION & CORRECTIVE ACTION	36
13	SAFETY DURING WORK EXECUTION	37
13.1	HSE SYSTEMS & PROCEDURES	37
13.2	WORK PERMIT SYSTEM	39
13.3	ACTIVITY SPECIFIC SAFETY REQUIREMENTS	40
13.4	ENVIRONMENTAL CONTROL	46
13.5	HOUSEKEEPING	47

S. No.	Description	Page No.
13.6	WASTE MANAGEMENT	47
13.7	TRAFFIC MANAGEMENT	48
13.8	EMERGENCY PREPAREDNESS & RESPONSE	50
13.9	CONTROL OF DOCUMENTS	50
13.10	CONTROL OF RECORDS	50
14	HSE INSPECTION	51
15	HSE PERFORMANCE	54
16	HSE PENALTIES FOR NON-COMPLIANCE	55
17	OTHER REQUIREMENTS	56
18	INTERNAL & EXTERNAL HSE AUDITS	56
19	HSE REVIEW	57
20	FORMATS USE	58
	<i>FORMATS</i>	
SECTION B		
	ESTABLISHMENT OF COMMON FACILITIES / INFRASTRUCTURE	
	SHARED FACILITIES	
ANNEXES		
	ANNEXURE-1	
	ANNEXURE-2	
	ANNEXURE-3	
	ANNEXURE-A: ACTIVITY SPECIFIC REQUIREMENTS FOR SAFETY	
	ANNEXURE-B: HSE PRECAUTIONS FOR ADVERSE CLIMATES & WEATHER CONDITIONS	
	ANNEXURE-C: FIRE EXTINGUISHER REQUIREMENTS	
	ANNEXURE-D: SPECIFICATIONS	
	RECORD OF REVISIONS	

GENERAL

1. PURPOSE

- 1.0** The purpose of this HSE Plan is to provide for the systematic identification, evaluation, prevention and control of general workplace hazards, specific job hazards, potential hazards and environmental impacts that may arise from foreseeable conditions during installation and servicing of industrial projects and power plants.
- 1.1** This document shall be followed by BHEL's Sub-Contractors at all installation and servicing sites. In case BHEL has contractual HSE obligations towards customer, this document will be followed in conjunction with (BHEL's) customer specific requirements, ensuring that applicable systems, controls and checks of both are implemented in letter and spirit.
- 1.2** In case the customer has any specific requirement, the same is to be fulfilled but may not include financial inclusion.
- 1.3** This document shall be followed unless otherwise mentioned in TCC (technical condition of contract) or elsewhere in NIT or contract documents. This supersedes all HSE clauses in GCC.
- 1.4** Although every effort has been made to make the procedures and guidelines in line with statutory requirements, in case of any discrepancy relevant statutory guidelines must be followed.

2. SCOPE

The document is applicable on all activities and assets including managerial, supervisory, professional, technical, clerical and other workers including contract laborers; and equipment operating under the control of BHEL's Subcontractors at all installation / servicing activities of BHEL Power Sector as per the relevant contractual obligations.

3. OBJECTIVES

The HSE Plan reflects that BHEL places high priority upon the Occupational Health, Safety and Environment at workplaces. The Sub-contractor shall:

Health & Safety

- Prevent injury and ill health of all persons at site ('Persons' refers to all personnel including managerial, supervisory, professional, technical, clerical and other workers including contract laborers)

Environment

- Prevent pollution to environment and ensure protection of environment taking into account interested party concern and conservation of resources and reduction of wastage

Legal Requirements

- Comply at all times with the relevant statutory and contractual HSE requirements.

Planning & Resources

- Ensure that all work planning takes into account all persons that may be affected by the work.
- Ensure timely provision of resources to facilitate effective implementation of HSE requirements.

Competency, Training & Awareness

- Provide trained, experienced and competent personnel. Ensure medically fit personnel only are engaged at work.
- Provide all personnel with adequate information, instruction, training and supervision on the safety aspect of their work.

Maintenance of Equipment

- Ensure fitness testing of all T&Ps. Lifting appliances like cranes, chain pulley blocks etc. are certified by competent authority.

Safety during Operations

- Provide and maintain plant, places and systems of work that are safe and without risk to health and the environment.
- Effectively control, co-ordinate and monitor the activities of all personnel on the Project sites including subcontractors in respects of HSE.
- Establish effective communication on HSE matters with all relevant parties involved in the Project works.

HSE Improvement

- Capture the data of all incidents including near misses, process deviation etc. Investigate and analyze the same to find out the root cause
- Ensure timely implementation of correction, corrective action.
- Ensure continual improvement in HSE performance

GOALS AND TARGETS

- ❖ **To achieve “Zero Incident at Site” (LTI)**
- ❖ **100% compliance of all legal/statutory requirements related to HSE.**
- ❖ **100% Health, Safety and Environmental Induction training attendance for all workers.**
- ❖ **100% High Risk activities to be carried out only after approved Method Statement, HIRA / Aspect-Impact / JSA / OCP and Permit to Work are implemented.**
- ❖ **100% PPEs compliance in high and medium risk activities.**
- ❖ **100% monitoring of all Work Areas**
- ❖ **100% detection of non-conformities in work area and 100% closure within specified time**
- ❖ **100% incident (near miss, minor, major, other) reporting, recording and reviewing for corrective actions.**
- ❖ **Regular Safety Reviews to assess HSE program compliance and 100% closure of any recognized gaps to continually improve safety management and incident prevention.**

4. REFERENCES

1. ALL CONTRACTUAL HSE REQUIREMENTS INCLUDING THIS DOCUMENT
2. ALL APPLICABLE ACTS, RULES & REGULATIONS
3. BHEL POWER SECTOR HSE MANAGEMENT SYSTEM
 - I. HSE PROCEDURES (13.1.1)
 - II. WORK PERMITS (See Clause 13.1.2)
 - III. OPERATIONAL CONTROL PROCEDURES (See Clause 13.1.3)
 - IV. FORMATS (See Clause 21)
4. BHEL CORPORATE STANDARD PPE GUIDELINES
5. RELEVANT INDIAN STANDARDS FOR SAFETY (See Annexure 02)

(Note: Wherever, the date or revision number of a document is not mentioned, latest revision is implied)

5. **BHEL HEALTH, SAFETY & ENVIRONMENT POLICY:**

In BHEL, Health, Safety and Environment (HSE) responsibilities are driven by our commitment to protect our employees and people we work with, community and environment. BHEL believes in zero tolerance for unsafe work/non-conformance to safety and in minimizing environmental footprint associated with all its business activities. We commit to continually improve our HSE performance by:

- Developing safety and sustainability culture through active leadership and by ensuring availability of required resources.
- Ensuring compliance with applicable legislation, regulations and BHEL systems.
- Taking up activities for conservation of resources and adopting sound waste management by following Reduce/Recycle/Reuse approach.
- Continually identifying, assessing and managing environmental impacts and Occupational Health & Safety risks of all activities, products and services adopting approach based on elimination/substitution/reduction/control.
- Incorporating appropriate Occupational Health, Safety and Environment criteria into business decisions, design of products & systems and for selection of plants, technologies and services.
- Imparting appropriate structured training to all persons at workplace and promoting awareness amongst customers, contractors and suppliers on HSE issues.
- Reviewing periodically this policy and HSE Management Systems to ensure its relevance, appropriateness and effectiveness.
- Communicating this policy within BHEL and making it available to interested parties.



Atul Sobti
Chairman & Managing Director

6. TERMS AND DEFINITIONS

6.0 INCIDENT

Work- related or natural event(s) in which an injury or ill health (regardless of severity) or fatality, damage to property/environment occurred, or could have occurred.

6.1 NEAR MISS

An incident where no ill health, injury, damage or other loss occurs, but it had a potential to cause, is referred to as "Near-Miss incident".

6.2 MAN-HOURS WORKED

The total number of employee hours worked by all employees including subcontractors working in the premises.

It includes managerial, supervisory, professional, technical, clerical and other workers including contract laborers.

Man-hours worked shall be calculated from the payroll or time clock recorded including overtime. When this is not feasible, the same shall be estimated by multiplying the total man-days worked for the period covered by the number of hours worked per day. The total number of workday for a period is the sum of the number of men at work on each day of period. If the daily hours vary from department to department separate estimate shall be made for each department and the result added together.

6.3 FIRST AID CASES (FAC)

First aid cases include:

1. Visit to a physician or a licensed health care professional solely for observation or counselling
2. Conduct of diagnostic procedures like X rays, blood test including the prescription medications used solely for diagnostic purposes (e.g. eye drops to dilate eyes)
3. Using a non-prescription medicine at non-prescription strength (for medication available in both prescription and non-prescription form as recommendation by a physician or other licensed health care professional to use a non-prescription medication at prescription strength is considered medical treatment for record keeping purposes);
4. Administering tetanus immunizations (other immunizations, such as Hepatitis B vaccine or rabies vaccine, are considered medical treatment);
5. Cleaning, flushing or soaking wounds on the surface of the skin;
6. Using wound coverings such as bandages, Band-Aids TM, gauze pads, etc.; or using butterfly bandages or Steri-Strips TM (other wound closing devices such as sutures, staples, etc., are considered medical treatment);
7. Using hot or cold therapy;
8. Using any non-rigid means of support, such as elastic bandages, wraps, non-rigid back belts, etc. (devices with rigid stays or other systems designed to immobilize parts of the body are considered medical treatment for record-keeping purposes);

9. Using temporary immobilization devices while transporting an accident victim (e.g., splints, slings, neck collars, back boards, etc.).
 10. Drilling of a fingernail or toenail to relieve pressure, or draining fluid from a blister;
 11. Using eye patches;
 12. Removing foreign bodies from the eye using only irrigation or a cotton swab;
 13. Removing splinters or foreign material from areas other than the eye by irrigation, tweezers, cotton swabs or other simple means;
 14. Using finger guards;
 15. Using massages (physical therapy or chiropractic treatment are considered medical treatment for recordkeeping purposes); or
 16. Drinking fluids for relief of heat stress.
- No other treatments are considered first aid.

6.4 MEDICAL TREATMENT CASES (MTC)

An incident involved with an injury or illness that needs medical attention beyond First-aid as per 6.3 above.

6.5 **Dangerous Occurrence** is defined as:

- (1) Collapse or failure of lifting appliances or hoist or conveyors or other similar equipment/machine;
- (2) Collapse or failure of a crane, derrick, winch, hoist or other appliance used in raising or lowering persons or goods or any part thereof, or the overturning of a crane;
- (3) Explosion or fire causing damage to the structure of any room or place in which persons are employed, or to any machine or plant, resulting in the complete suspension of ordinary work;
- (4) Electrical short circuit or failure of electrical machinery, plant or apparatus, attended by explosion or fire, causing structural damage involving its stoppage or disuse;
- (5) Explosion of a receiver or container used for the storage at a pressure greater than atmospheric pressure of any gas or gases (including air) or any liquid or solid resulting from the compression of gas;
- (6) Collapse in whole or part from any cause whatsoever of any roof, wall, floor, Structure or foundation forming part of the construction site in which persons are employed;
- (7) Total or partial collapse of any overburden, face, tip or embankment on the Construction site;
- (8) The overturning of, or collision with any object by any bulldozer, dumper, excavator, grader, lorry or shovel loader, or any mobile machine used for the handling of any substance on the construction site.

6.6 **Fire:** Except Dangerous occurrence, any incident involving fire.

6.7 **Property Damage:** Except Dangerous Occurrences and Fire, any incident of property (materials, building, equipment etc) getting damaged.

6.8 TYPE OF INCIDENT / ACCIDENT & THEIR REPORTING:

The categories of Incident / accident are as follows:

Non-Reportable Cases or NON-LTI: (Including First-aid cases as per 6.3 and MTC as per 6.4)

Minor: In this case the injured person resumes duty within 48 hours of incident.

Reportable Cases (LTI or Loss Time Injury Cases):

Major: In this case the injured person is disable for 48 hours or more and is not able to perform his duty. (as per IS 3786). It includes fatality.

All incidents must be reported orally immediately and in writing within 24 hours of time of incident. However, in case of fatality, it shall be reported to the statutory authority within prescribed timeline through proper channel. Internal reporting shall be done within 6 hours of time of the incident

6.9 TOTAL REPORTABLE FREQUENCY RATE

Frequency rate is the number of Reportable Lost Time Injury (LTI) per one Million Man hours worked. Mathematically, the formula read as:

$$\frac{\text{Number of Reportable LTI}}{\text{Total Man Hours Worked}} \times 1,000,000$$

6.10 SEVERITY RATE

Severity rate is the Number of days lost due to Lost Time Injury (LTI) per one Million Man hours worked. Mathematically, the formula reads as:

$$\frac{\text{Days lost due to LTI}}{\text{Total Man Hours Worked}} \times 1,000,000$$

6.11 FREQUENCY SEVERITY INDEX (FSI)

Frequency Severity Index, $FSI = \sqrt{FR * SR / 1000}$

6.12 INCIDENCE RATE

Incidence Rate is the Number of LTI per one thousand manpower deployed. Mathematically, the formula reads as:

$$\frac{\text{Number of LTI} \times 1000}{\text{Average number of manpower deployed}}$$

6.13 JOB SAFETY ANALYSIS

A job safety analysis (JSA) is a procedure which helps integrate accepted safety and health principles and practices into a particular task or job operation. In a JSA, each basic step of the job is to identify potential hazards and to recommend the safest way to do the job. Other terms used to describe this procedure are job hazard analysis (JHA) and job hazard breakdown.

6.14 SAFETY WALK

It's a walk (conducted periodically) by an official through a portion or whole of a site as an HSE officer, noting down HSE observations, speaking to concerned workmen and supervisor on observation, recording and reporting to in charges of agencies, getting the same rectified with personal follow up - to send out a strong message on Management's commitment to safety.

6.15 HEAVY & COMPLEX LIFTING

A heavy and complex lifting activity includes:

1. Lifting above 50 Tons
 2. Tandem Lifting using multiple cranes
 3. Total load exceeding 75% of capacity of crane
 4. Lift of unusual difficulty or geometry or rigging
 5. Lift over operating units
 6. Any other lift as decided by site HSE / Erection
- In any case, Job Safety Analysis to be carried out for any lift above 5 Tons.

6.16 SAFETY COMMITTEE

As per the BOCW, Safety Committee shall be constituted if there are more than five hundred or more construction workers are employed at any site. As per the Factories Act, 1948 it is for 250 workers. It shall be represented by equal number of representatives of employer and construction workers.

6.17 NIGHT WORK

Work conducted after sunset when only a fraction of total manpower is available

Section-A

Main Requirements

(Applicable in Full)

7. HSE ORGANISATION

7.1 DEPLOYMENT

7.1.1 Minimum Number (Availability per contract / package per Working Shift)

7.1.1.1 HSE Officer	7.1.1.2 HSE Supervisor	7.1.1.3 HSE Steward / Observer
1 per 300 workers or part thereof as a minimum or as mandated by applicable legal requirements, whichever more stringent	1 per 150 workers or part thereof	1 per 50 workers or part thereof

7.1.1.4 The safety officers shall be engaged directly by the sub-contractor, whereas safety supervisors and safety stewards may be from the agencies engaged by the sub-contractor.

7.1.1.5 Deployment Plan:

- 7.1.1.5.1 These shall be minimum one HSE officer along with HSE supervisor and HSE steward in the aforesaid ratio for every shift for each unit of Boiler/ESP/Power House & TG/ Chimney/ Whole of Cooling Tower.
- 7.1.1.5.2 For Civil works and other BOP items, deployment shall be broadly as specified in the above table. But BHEL shall finally approve the deployment based on nature and volume of jobs, Risks and hazards associated etc.
- 7.1.1.5.3 The deployment plan of Safety manpower at various locations shall be submitted to BHEL for approval by subcontractor

BHEL reserves the right to demand more safety personnel than what is stipulated here and change the deployment pattern

7.1.2 QUALIFICATION & EXPERIENCE

All Degrees/ Diplomas shall be recognized by State Council for Technical Education & Vocational Training (SCTE & VT) / All India Council for Technical Education (AICTE) / University

7.1.2.1 HSE Officer	7.1.2.2 HSE Supervisor	7.1.2.3 HSE Steward / Observer
A. i. Recognized degree in any branch of Engg. or Tech. or Architecture with practical experience of working in a building or other construction work in supervisory capacity for a period of not less than two years, or Recognized diploma in any branch of Engg. or Tech with practical experience of working in a building or other construction work in supervisory capacity for a period of not less than five years. ii. Recognized degree or diploma in Industrial safety ii. (Preferably) have adequate knowledge of the language spoken by majority of the workers at the construction site. Alternatively: B. Graduation Degree in Science with Physics & Chemistry and degree or diploma in Industrial Safety (from any Indian institutes recognized by AICTE or State Council of Tech. Education of any Indian State) with practical experience of working in a building, plant or other construction works (as Safety Officer, in line with Indian Factories Act, 1958) for a period of not less than five years.	As a minimum, (s)he shall possess: A recognized graduation Degree in Science (with Physics & Chemistry) or a recognized diploma in Engg. or Tech. with: a. Minimum Two years of practical experience in construction work environment and b. Should possess requisite skills to deal with construction safety & fire related day-to-day issues.	As a minimum, (s)he shall possess: 1. Class XII pass certificate and 2. Trained in fire-fighting as well as in safety / occupational health related subjects, with: a. Minimum two year of practical experience in construction work environment and b. Should have adequate knowledge of the local language spoken by majority of the workers at the construction site.

7.1.3 HSE IN-CHARGE

In case there are more than one HSE Officers with any subcontractor, one of them, who is senior most by experience (in HSE discipline), may be designated as HSE In-Charge. Duties & responsibilities of such person shall be commensurate with that of relevant statute and primarily to coordinate with top management of Client and subcontractors.

7.1.4 AVAILABILITY AND PENALTY FOR NON-DEPLOYMENT:

Subcontractor shall ensure physical availability of safety personnel at the place of specific work location including where Height Work Permit is required/granted. No work shall be started in any area until above safety personnel & concerned Site Engineer of subcontractor are physically deployed at site.

The Subcontractor shall prepare an organization chart identifying the areas of operations, responsibilities and reporting structure of all safety personnel and submit the same to BHEL.

The subcontractor shall deploy sufficient safety officers, supervisors and safety-stewards, as per numbers & qualifications mandated in this Section since mobilization of first batch of manpower and add more in proportion to the added strength in work force. Any delay in deployment will attract a penalty at following rates:

Non-deployment of HSE Officer	–	Rs 50000 per man-month
Non-deployment of HSE Supervisor	–	Rs 30000 per man-month
Non-deployment of HSE Steward	–	Rs 20000 per man-month

Penalty shall be collected for the period of non-availability of safety personnel after allowing a grace period of 15 days for finding a replacement.

7.1.5 QUALIFICATION OF CRANE & WINCH OPERATORS, DRIVERS etc.:

The Crane and Winch Operators, Drivers, Riggers and other professionals deployed shall be qualified and experienced, and have valid license for the class of vehicle / machinery as applicable. The subcontractor shall certify competence of these persons in writing as and when they join.

Crane/Winch operator should have certificate on subject course or owner experience certificate in letterhead.

7.1.6 In case the statutory requirements i.e. State or Central Acts and / or Rules as applicable like the Building and Other Construction Workers' Regulation of Employment and Conditions of Service- Act,1996 or State Rules (wherever notified), the Factories Act, 1948 or Rules (wherever notified), etc. are more stringent than above clarifications, the same shall be followed.

7.1.7 **BILLING:** Deployment of Safety manpower as per this clause **shall be** a billable item.

7.1.8 The Subcontractor shall verify & authenticate credentials of the HSE personnel detailed in this Section and furnish Bio-Data/Resume / Curriculum Vitae of the safety personnel as above for BHEL / Owner's approval, at least 1 month before the mobilization. The Subcontractor, whenever required, shall arrange submission of original testimonials / certificates of their Safety personnel, to BHEL / Owner (for verification/scrutiny, etc.)

7.1.9 Prior approval of CVs by BHEL for Safety Officer and Safety Supervisor is mandatory, however BHEL has right to check suitability of Safety Stewards as well.

7.2 HSE RESPONSIBILITIES

The subcontractors shall communicate the HSE responsibilities as indicated in this section to relevant employees in written Form and ensure awareness of the same

7.2.1 ALL EMPLOYEES

1. To be aware of, get involved in and ensure implementation of all HSE related Systems and Procedures including but not limited to:
 - a) BHEL HSE Management System including HSE Procedures and OCPs
 - b) Work Permit System
 - c) Emergency Preparedness Response Plans
 - d) Contractual HSE requirements
 - e) Legal Requirements
 - f) Penalty System
 - g) Training requirements
2. To ensure that the persons engaged in respective area follow the safety rules like using appropriate PPEs.
3. To keep track of repetitive minor or major incident observation/ report and submit to BHEL.
4. To prepare HIRA / JSA as required and submit to BHEL for verification.
5. To record all incidents including near miss and report to BHEL.
6. To adopt safe working practices at all times and act as role model for Safety
7. To take immediate corrective action actions in case any non-conformity is observed on product / process / system with respect to Occupational Health, Safety and Environment.
8. In case any particular activity / work has extremely high consequential risk or high environmental impact, same shall be brought to the notice of BHEL Package In-charge before starting the work.
9. To interfere/ stop work as & when identified unsafe.
10. To maintain & promote improved level of house-keeping all the time at site.
11. To support/co-operate with audit team members as & when safety audits are carried out.
12. To involve in investigation, if any incident occurs in his work area.
13. To participate in safety promotional programmes.
14. To attend the safety committee meeting, if member/ invitee
15. To ensure that only fit T&Ps and qualified persons are engaged for all activities.
16. Shall ensure that person working above 2.0 meter should use Safety Harness tied to a life line/stable structure.
17. Shall ensure that materials are not thrown from height. Cautions to be exercised to

prevent fall of material from height.

18. Shall ensure that all T&Ps engaged are tested for fitness and have valid certificates from competent authorities.

7.2.2 SITE IN –CHARGE & PACKAGE IN-CHARGES OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. **Shall ensure fulfillment of HSE requirements of BHEL contract as given in this document.**
3. Shall engage qualified safety manpower as per this document at all times.
4. Shall adhere to the rules and regulations mentioned in this document, practice very strictly in his area of work in consultation with his concerned engineer and the safety coordinator.
5. Shall screen all workmen for health and competence requirement before engaging for the job and periodically thereafter as required.
6. Shall ensure that all the workers are engaged after undergoing induction training.
7. Shall arrange for all necessary PPEs like safety helmets, belts, full body harness, shoes, face shield, hand gloves etc. before starting the job. Shall ensure that no working men /women carry excessive weight more than stipulated in Factory Rule Regulation R57.
8. Shall ensure that provisions stipulated in contract Labor Regulation Act 1970, Chapter V C.9, canteen, rest rooms/washing facilities to contracted employees at site.
9. Shall report all incidents (Fatal/Major/Minor/Near Miss) to the Site engineer /HSE officer of BHEL.
10. Shall conduct Safety Walks and safety inspections, and act as a role model for Safety.
11. Shall ensure that Horseplay is strictly forbidden.
12. Shall ensure that adequate illumination is arranged during night work.
13. Shall ensure that all personnel working under subcontractor are working safely and do not create any Hazard to self and to others.
14. Shall ensure display of adequate signage/posters on HSE.
15. Shall ensure that mobile phone is not used by workers while working.
16. Shall ensure conductance of HSE audit, mock drill, medical camps, induction training and training on HSE at site.
17. Shall ensure full co-operation during Client/External /Customer HSE audits.
18. Shall ensure submission of look-ahead plan for procurement of HSE equipment's and PPEs as per work schedule.
19. Shall ensure adequate valid fire extinguishers are provided at the work site.
20. Shall ensure availability of sufficient number of toilets /restrooms and adequate drinking water at work site and labor colony.
21. Shall ensure adequate emergency preparedness
22. Site In-charge also involve in the induction training so as to share knowledge of some incident and guide the worker to perform work safely.
23. Shall ensure power source for hand lamps shall be maximum of 24 v.
24. Shall ensure temporary fencing should be done for open edges if Hand – railings and Toe-

guards are not available.

25. Shall be responsible for the periodic testing of T&Ps (winches / crane /hydra/tools/equipment so on.) and Pressure Vessels as per applicable codes and submit report to BHEL
26. Shall be member of site HSE committee and attend all meetings of the committee

7.2.3 HSE OFFICER OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. Carry out safety inspection of Work Area, Work Method, Men, Machine & Material, P&M and other tools and tackles.
3. Facilitate HIRA and Aspect/Impact Study in the area and ensure control measures.
4. Highlight the requirements of safety through Tool-box / other meetings.
5. Help concerned HOS to prepare Job Specific instructions for critical jobs.
6. Maintain record and conduct investigation of all incident/dangerous occurrences & recommend appropriate safety measures.
7. Advice & co-ordinate for implementation of HSE permit systems, OCPs & MPs.
8. Convene HSE meeting & minute the proceeding for circulation & follow-up action.
9. Plan procurement of PPE & Safety devices and inspect their healthiness.
10. Report to BHEL on all matters pertaining to status of safety and promotional programmes at site level.
11. Encourage raising Near Miss Report on safety along with, improvement initiatives on safety.
12. Facilitate administration of First Aid
13. Facilitate screening of workmen and safety induction.
14. Conduct fire Drill and facilitate emergency preparedness
15. Design campaigns, competitions & other special programs to promote safety in the workplace.
16. Notify non-conformance to safety norms observed during site visits / site inspections.
17. Recommend to Site In-charge, immediate discontinuance of work until rectification, of such situations warranting immediate action in view of imminent danger to life or property or environment.
18. To decline acceptance of such PPE / safety equipment that do not conform to specified requirements.

7.2.4 HSE SUPERVISOR OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. To assist Safety officer

7.2.5 HSE STEWARD / OBSERVER OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. To monitor allotted area for Safety violations, take required action and inform the concerned Safety Supervisor / Officer

3. To assist Safety Officer and Safety Supervisor

7.2.6 HSE DOCUMENTS, SYSTEMS & PROCEDURES:

BHEL shall provide the subcontractor soft copies of all applicable HSE Procedures, Work Permits, Operational Control Procedures, Formats and any other instructions required for the implementation of HSE Management System before commencing operations at site. Subcontractor shall ensure the availability of the same.

7.2.7 IMPORTANT SITE EHS RULES RESULTING IN POSSIBLE EXPULSION FROM SITE

- ❖ Pre-employment Medical fitness is compulsory for all workers.
- ❖ EHS induction is mandatory for all new workers, supervisor and engineers, subcontractor managers etc.
- ❖ No visitors are allowed for site visit without safety induction.
- ❖ **Mandatory PPEs are**
 - ✓ Safety helmet,
 - ✓ Hard toe safety shoes,
 - ✓ Safety glasses
 - ✓ Reflective vest
 - ✓ Full/half sleeve (at least 4-inch-long) shirt
 - ✓ Full length pant/trousers for male and preferably Salwar Kameez for female
- ❖ **Zero Tolerance Safety Rules**
 - Violation of Fall protection / not anchoring & wearing safety harness above 6 feet,
 - Work without PTW
 - Child labor at site
- ❖ Restricted Use of cell phone in the working zone, operating vehicle/crane and at height. Encourage the people not to bring mobile phones inside the project premises.
- ❖ All vehicle being used at site to be in good condition in all respect.
- ❖ All electrical installations should have individual 30 mA ELCBs
- ❖ **Fighting:** Fighting anywhere on the Project site, including in parking areas, is strictly forbidden; violators will be barred from site and possibly subjected to legal action by local authorities.
- ❖ **Horseplay:** Running, pushing, practical jokes, and other horseplay are forbidden on the project site, including in parking areas.
- ❖ **Gambling:** Gambling on the Project site is not permitted
- ❖ **Alcohol & Drugs:** Intoxication or possession of alcohol or illegal drugs is strictly forbidden.
- ❖ **Weapons:** Possession of weapons on the Project site is strictly prohibited
- ❖ **Asbestos Material:** No asbestos material is allowed to use in Project Site
- ❖ **Hair:** Anyone working on site property with scalp hair longer than the top of his/her shoulders must tie-up and restrains the hair within the hard hat or coveralls, shirt or jacket collar.
- ❖ **Jewelry:** Loose necklaces, dangling earrings and bracelets shall not be worn when working on the Project site.

- ❖ **Contact Lens:** While the site does not prohibit the wearing of contact lens, BHEL Project does not recommend their use.
- ❖ **Use of Empty Drums:** Use of empty drums to climb up and work is banned. Proper stool/ ladder/ stage required to be used if intended to work at height.
- ❖ Projects must comply in full with all applicable EHS local and national legislation. In circumstances where there is a conflict between local or national legislation and client requirements, the higher (more protective) requirement must prevail.
- ❖ All persons working on suspended scaffolds/cradles/gondolas must wear and use appropriate fall prevention equipment so as to protect them effectively at all times when they are at risk from any failure of any part of the scaffold/cradle/gondola, including its suspension system
- ❖ **Construction Trucks/Vehicles**
 - ✓ Vehicles must be equipped with proper seat belts for driver and passengers. All persons riding in vehicles must be advised of the requirement that seat belts are to be used whenever the vehicles are being operated.
 - ✓ The subcontractor is responsible for assuring the overall safe condition of vehicles assigned to its projects.
 - ✓ The speed limit on the project site is a maximum of 20 Km/hr.
 - ✓ Any person found operating or driving in a reckless or careless manner without regard for the safety of other employees or the general public will be immediately removed for the equipment they were operating and permanently prohibited from operating or driving any equipment on the project.
 - ✓ Any mobile equipment found to be unsafe or defective must be immediately removed from service and sent for repair or replacement. The subcontractor must ensure that the proper repairs have been made prior to putting the equipment back into service.
- ❖ **Construction Material Handling Heavy Equipment**
 - ✓ No equipment may be modified without equipment manufacturer's authorization.
 - ✓ Rollover Protective Structures must be provided for all equipment as required.
 - ✓ Seat belts must be provided and used by operators of all equipment that has a Rollover Protective Structure.
 - ✓ All bi-directional equipment must be equipped with an operable horn that must be used as needed when the machinery is moving in either direction.
 - ✓ All bi-directional equipment must also have an operable alarm in addition to the horn.
 - ✓ All equipment must be provided with a multi-purpose (class A, B, and C) fire extinguisher mounted in an easily accessible location.
 - ✓ Braking systems, controls, safety devices must be maintained in effective operating condition.
 - ✓ The operator must inspect the equipment at the beginning of the shift and test for acceptable

- ✓ operation as per the equipment's manufacturer's instructions. Inspections must be documented and filed.
- ✓ Only qualified personnel must be allowed to operate equipment. Qualification must be documented and filed.

In case any worker violates any of the EHS rules identified by BHEL as above, following punitive action shall be taken:

First Offence	Second Offence	Third Offence	Fourth Offence
<i>Oral warning</i>	<i>Gate Pass Punched</i>	<i>Gate pass punched (second)</i>	<i>Gate Pass Punched(third) and person sent out of the gate</i> <i>Photo of concerned worker to be displayed on Notice boards and prominent locations.</i>

BHEL has the right to send out such person even earlier than fourth offence after considering the severity of the offence and/or the persons track record related to following general/EHS rules.

BHEL reserves right to expel even concerned supervisor or engineer as well in case of repeat of such cases of indiscipline.

Note:

The appellate authority in this case shall be the BHEL Site In-charge whose decision shall be final on the matter and binding on all parties.

8. PLANNING FOR HSE

A. Identifying Hazards / Risks & Aspects / Impacts and implementing control measures

1. Subcontractor shall identify all OHS Hazards and Risks applicable to all activities in scope as per *HSEP01: HSE Procedure for OHS Hazards and Risks*, and plan & implement the required control measures.
2. Subcontractor shall identify all Environmental Aspects and Impacts applicable to all activities in scope as per *HSEP02: HSE Procedure for Environmental Aspects and Impacts*, and plan & implement the control measures.

B. Register of Regulations:

Subcontractor shall prepare a register of applicable rules and regulations in the scope as per

HSEP03: HSE Procedure for Register of Regulations and plan to ensure compliance.

The detailed plans and registers in A and B to be submitted to BHEL for review and approval within 60 days of start of work at site.

Note: The plans above are dynamic and shall be periodically reviewed as per BHEL requirement.

8.1 MOBILISATION OF MACHINERY / EQUIPMENT / TOOLS

1. Subcontractor shall furnish to BHEL, the Test Certificates issued by the jurisdictional competent persons of machinery, equipment and other T&Ps to be deployed at site, before deployment. BHEL reserves the right to disallow the same if found non-conforming to HSE / legal requirements
2. As a further measure to ensure that machinery, equipment and tools being mobilized to the construction site are fit for purpose and are maintained in safe operating condition and comply with legislative and owner requirement, inspection shall be arranged by in-house expert / competent authority (preferable) for acceptance. **(Report Format: HSEP:14-F15)**
3. **The equipment considered for this purpose shall include all those in the T&P list in the tender document. Conventional Hydra crane with carriage in front shall not be permitted. Other models like FX or TRX series of Escorts or equivalent shall be permitted.**
4. In the course of work, the subcontractor shall notify the BHEL Engineer, of his intention to bring on to site any equipment or any container, with liquid or gaseous fuel or other substance which may create a hazard.
5. The Engineer shall have the right to prescribe the condition under which such equipment or container may be handled and used during the performance of the works and the subcontractor shall strictly adhere to such instructions.
6. The Engineer shall have the right to inspect any construction tool and to forbid its use, if in his opinion it is unsafe. No claim due to such prohibition will be entertained.
7. Following items should be only ISO certified and not more than 2 yr. of purchase
 - i. Chain pulley block
 - ii. Wire rope slings
 - iii. Grinding machine and wheel and buffing wheel
 - iv. Gas cutting equipment
8. Following equipment should not be more than 5 Yr. old
 1. Welding machine
 2. Vibrator Machine
 3. Concrete cutter
 4. DB/Electrical panel
9. **Office Infrastructure** - subcontractor shall arrange a computer / Laptop with Network

connection, chair and table for HSE Staff to facilitate HSE reporting and recordkeeping.

8.2 MOBILISATION OF MANPOWER

1. As a measure to ensure that manpower being mobilized to the construction site is fit and competent for safe working, screening arrangement shall be made by the sub-contractor to ensure fulfillment of contractual as well as legislative requirement by:
 - i. Ensuring the required qualification/ training/ certification/ license and experience for the job as per Section 7 of this document & applicable legal requirements
 - ii. **Medical Checkup:** Examination of medical fitness shall be conducted through qualified medical professional for all workers to be deployed. (Record: Format No. HSEP14:F02). For height workers, height phobia test to be carried out as qualification criteria.
 - iii. **Induction Training:** Induction training of all workers to be ensured as per clause 9.1 and HSEP04: *HSE Procedure for Training & Awareness* (Record: Format No. HSEP14:F03)

Only on successfully meeting above criteria, permanent gate passes to be issued.

2. The subcontractor shall strictly adhere to the maximum daily working hours and other requirements as per applicable laws and shall not engage any employee below 18 years of age.
3. The subcontractor shall take special care of the employees affected with occupational diseases under rule 230 and schedule II of BOCW Rules. The employees not meeting the fitness requirement should not be engaged for such job.
4. Ensure that the regulatory requirements of excessive weight limit (to carry / lift / move weights beyond prescribed limits) for male and female workers are complied with.
5. System for Issue of Gate Passes to authorized personnel only shall be ensured at site
6. The subcontractor shall keep accurate and updated records of all manpower preferably in soft form
7. The subcontractor shall ensure appropriate infrastructure for workers as per Clause 8.4.

8.3 PROVISION OF PPEs

1. Adequate numbers of Personnel Protective Equipment (PPEs), will be made available at site & their effectiveness and regular use by all will be ensured
2. The PPEs shall conform to the relevant standards as listed in Annexure 02, and bear ISI mark.
3. The following matrix recommends usage of minimum PPEs against the respective job. For details, the respective OCPs to be referred.

Sl. No	Type of work	Suggested PPEs
1	Work at height	Double lanyard full body harness with rope grab (as applicable), retractable Fall arrestor (specific cases), Safety nets (single / double)
2	Concrete and asphalt mixing	Nose mask, hand glove, apron, gum boot, goggles
3	Welders/ Grinders/ Gas cutters	Welding/face screen, apron, hand gloves, nose mask and ear muffs if noise level exceeds 90dB. Helmet fitted with welding shield is preferred for welders, safety goggles
4	Stone/ concrete breakers	Ear muffs, safety goggles, hand gloves
5	Electrical Work	Rubber hand glove, Electrical Resistance shoes, Arc-flash resistant suit.
6	Insulation Work	Respiratory mask, Hand gloves, safety goggles
7	Grit/Sand blasting	Blast suit, blast helmet, respirator, leather gloves, safety goggles
8	Painting	Plastic gloves, Respirators (particularly for Spray painting)
9	Radiography	As per BARC guidelines
10	General	Helmets, Safety Shoes Reflective vests, ear plugs, nose masks, safety goggles

4. The exact PPEs required for a particular task shall be chosen to ensure there are multiple lines of defense against accident or injury. All applicable safety precautions for a job shall be ensured notwithstanding the duration or perceived importance of the task.
5. Additionally, the BHEL safety officer may demand additional PPEs based on specific requirement
6. The applicability of PPEs shall be as per the concept of Hierarchy of controls, i.e.: Elimination->Substitution->EngineeringControls->AdministrativeControls-PPEs
7. Relying solely on PPEs without other applicable controls to be strictly avoided.
8. The issuing agency shall maintain register for issue and receipt of PPEs (Format No. HSEP: 14-F06A). All the PPEs shall be checked for quality before issue and the shall be periodically re-checked. The users shall be advised to check the PPEs themselves for any defect before putting on. The defective ones shall be replaced.
9. The body harnesses shall be serial numbered.
10. All worker should wear reflecting Jacket during both shift Day/Night.
11. Where workers are employed in sewers and manholes, which are in use, the subcontractor shall ensure that the manhole covers are opened and ventilated at least for an hour before the workers are allowed to get into manhole, and the manholes so opened shall be cordoned off with suitable railing and provided with warning signals or boards to prevent incident to the public
12. Besides the PPEs mentioned above, the persons shall use helmet, safety shoe and reflective vest at all times. The visitors shall use Helmet and any other PPEs as

deemed appropriate for the area of work.

13. Following color scheme for Helmets to be maintained:

- a. Workmen: Yellow
- b. Safety staff: Green or white with green band
- c. Electrician: Red
- d. Others including visitors: White

14. The Helmets shall have logo or name (abbreviation of agency name permitted) affixed or printed on the front along with the person's gate pass no. & blood group. An awarded worker shall have reflective logo

8.4 ARRANGEMENT OF INFRASTRUCTURE

The subcontractor is responsible for ensuring and maintaining the required HSE infrastructure at site as described in this Section

8.4.1 DRINKING WATER

1. Drinking Water Storage Tanks shall be provided and maintained at suitable places at different elevations / locations to ensure easy accessibility. The tank/container shall be kept on a platform at an elevation of at least 2 feet and should be covered:



2. **Construction and Quantity:** The design of Drinking Water Storage Tank (DWST) shall be submitted to BHEL for approval prior to initiating construction. Provision of 5 liter water daily for each worker to be maintained.
3. **Labelling:** DWST should be labeled as "Drinking Water". Date of last cleaning, next due date shall be indicated on the container besides Date of source testing as per IS 10500.
4. Cleaning of the DWST shall be ensured at least once in a week. Mild cleaning detergents as used for cleaning vessels shall be applied and scrubbers (3M or equivalent) shall be used for removing scales and deposits on the inside surface. The tank shall be thoroughly cleaned with potable water only before it is refilled.
5. Suitability of the water source should be tested as per IS10500.
6. For all tanks containing water unsuitable for drinking, prominent "Do Not Drink" signage shall be pasted in English, Hindi and local language.
7. In Hot Work and other critical areas, drinking water shall be made available near the activity
8. Provision of supplying drinking water to height workers and those working in difficult to reach

areas shall be made available through dedicated personnel.

- 8.4.2 **PROVISION OF LATRINES AND URINALS AT SITE** (Ref: Interstate Migrant Workmen (Regulation & Employment and Act, 1979) read with The Inter-State Migrant Workmen (Regulation of employment and conditions of service) central rules, 1980 (PI refer rule no. 42)

LATRINES

1. Latrines shall be provided in every establishment on the following scale, namely: -
 - a. Where females are employed, there shall be at least one latrine for every 25 females;
 - b. Where males are employed, there shall be at least one latrine for every 25 males:

Provided that where the number of males or females exceeds 190, it shall be sufficient if there is one latrine for 25 males or females, as the case may be, up to the first 100, and one for every 30 thereafter
2. Every latrine shall be under cover and so partitioned off as to secure privacy, and shall have a proper door and fastenings.
3. Where workers of both sexes are employed there shall be displayed outside each block of latrine and urinal a notice in the language understood by the majority of the workers '**For Men Only**', or '**For Women Only**', as the case may be.
4. The notice shall also bear the figure of a man or of a woman, as the case may be.

URINALS

5. There shall be at least one urinal for male workers up to fifty and one for female up to fifty employed at a time:
6. Provided that where the number of male or female workmen, as the case may be, exceeds 500 it shall be sufficient if there is one urinal for every fifty females up to the first 500 and one for every 100 or part thereof thereafter.
7. The urinals shall be designed and located so as to ensure privacy.
8. In case a structure encompasses multiple floors, urinals shall be provided suitably for quick access
9. The latrines and urinals shall be conveniently situated and accessible to workers at all times at the establishment.
10. The latrines and urinals shall be adequately lighted and shall be maintained in a clean and sanitary condition at all times.
11. Latrines and urinals other than those connected with a flush sewage system shall comply with the requirements of the public health authorities.
12. Water shall be provided by the means of tap or otherwise so as to be conveniently accessible in or near the latrines and urinals.

8.4.3 WASHING FACILITIES

1. In every workplace, adequate and suitable facilities for washing shall be provided and maintained.
2. Separate and adequate cleaning facilities shall be provided for the use of male and female workers. Such facilities shall be conveniently accessible and shall be kept in clean and hygienic

condition and dully illuminated for night use.

3. Overalls shall be supplied by the subcontractor to the workmen and adequate facilities shall be provided to enable the painters and other workers to wash during the cessation of work.

8.4.4 PROVISION OF REST SHELTER FOR WOKERS

Proper Sheds & Shelters big enough to accommodate all possible workers shall be provided for workers to rest during break. Taking rest at height, in activity area and other hazardous locations shall not be allowed.

The drawing of such sheds shall be submitted to BHEL for approval before construction.

8.4.5 MEDICAL FACILITIES

Refer Section B for applicability of requirements pertaining to Clause 8.4.5.1

8.4.5.1 MEDICAL CUM FIRST-AID CENTER

- a) A medical center shall be setup at site with basic facilities for handling medical emergencies. The medical center shall be developed independently by BHEL/an agency as specified in the contract and run jointly by all agencies on proportionate sharing basis as stipulated in the contract.
- b) A qualified medical professional, not less than MBBS, shall be deployed at medical center as stipulated in the contract.(Part-time or full time as decided at the site).
- c) There shall be a full-time trained first aider and a nurse. Depending upon the working hours at the site, First-aider shall be deployed accordingly.
- d) The center shall have all articles as per Schedule IV of BOCW(Central) Rules'1998. In addition,, one Stokes basket stretcher shall be available.
- e) An ambulance shall be deployed for every 1000 persons along with trained driver and accessories as per schedule V of Central BOCW Rules'1998. Depending upon the working hours at the site, First-aider shall be deployed accordingly.
- f) The center shall be adequately equipped for Resuscitation, Immobilisation, Dressing, dealing with poisoning cases including snake and insect-bites and sufficient stock of emergency medicines as prescribed by the qualified medical professional as per point (b)

8.4.5.2 IMPORTANT

- g) If there is no specific mention of responsibility of deployment or setting up of any of the above facilities and operating expenses thereof, BHEL site management shall have the liberty to give this responsibility to any of the contractors on cost sharing basis.
- h) Medical waste shall be disposed as per prevailing legislation (Bio-Medical Waste –Management and Handling Rules, 1998)
- i) Every injury shall be treated, recorded and reported.
- j) All First Aid injuries shall be recorded as per Format No. HSEP:14-F17
- k) List of qualified first aiders and their contact numbers to be displayed at conspicuous places.

8.4.5.3 FIRST AID

A. In addition to 8.4.5.1 &2, The subcontractor with Boiler&ESP, TG, Civil shall:

1. Provide necessary first aid facilities for every work place.
2. Ensure availability of qualified First-aider throughout the working hours.
3. Every injury shall be treated, recorded and reported.
4. Refresher course on first aid shall be conducted as necessary.
5. List of qualified first aiders and their contact numbers to be displayed at conspicuous places.
6. All First Aid injuries shall be recorded as per Format No. HSEP:14-F17

B. FIRST AID BOX

1. The first aid box shall be maintained by first aider who shall always be readily available during the working hours of the work place.

2. Details of First Aid Box:

- a) Details of contents of first aid box is given in **Annexure 03**. A slip of contents shall be pasted on the First Aid Box with following details:

Name, Quantity, Expiry Date, Checked by...

- b) First Aider's name and contact no to be displayed on the box.
- c) The first aid box shall be distinctly marked with a Green Cross on white background.
- d) The box shall be properly secured with lock & key to avoid misuse
7. The first aid boxes should be placed at various locations so as to make them available within easy reach of hazardous activities and at the quickest possible time.
8. The subcontractor shall ensure that the Supervisors and Engineers are adequately trained for attending to any emergency.
9. Monthly inspection of First Aid Box to be conducted by the subcontractor as per Format no. HSEP:14-F01

8.4.5.4 HEALTH CHECK UP

The persons engaged at the site shall undergo health checkup as per the **Format no. HSEP:14-F02** before induction. The persons engaged in the following works shall additionally undergo regular health checkup using same Format at least once in a year:

Height workers	Drivers/crane operators/riggers	Confined space workers
Shot/sand blaster	Welding and NDE personnel	Any person referred by BHEL

8.4.5.4.1 HEIGHT PHOBIA TEST

1. The persons engaged in working at heights (above 2 meters) to be assessed for Height Phobia and associated conditions.
2. Such workers are to be allowed only on successful completion of this test, otherwise they shall be allocated ground based jobs. IDs / Height passes shall be issued to such workers.

8.4.6 PROVISION OF CANTEEN FACILITY

Minimum or better facilities to be ensured as per BOCW (Rule 244) / Factories Act, specially taking care of the following:

1. Canteen facilities shall be provided for the workmen of the subcontractor inside the project site.
2. Proper cleaning and hygienic condition shall be maintained.
3. Proper care should be taken to prevent biological contamination.
4. Adequate drinking water should be available at canteen.
5. Fire extinguisher shall be provided inside canteen.
6. Regular health check-up and medication to the canteen workers shall be ensured.
7. Canteen waste to be disposed of in compliance with law
8. Domestic LPG cylinder shall not be used
9. Canteen should be periodically inspected using standard checklist finalized along with BHEL

8.4.7 PROVISION OF ACCOMMODATION / LABOR COLONY

1. The subcontractor shall provide to every workman (within fifteen days of the commencement of the employment of migrant workmen):
 - a) In case he is accompanied by any other member of his family, a suitable barrack so as to accommodate one room having at least a floor area of 10 square meters, a verandah and adequate additional covered space for cooking food as well as one common sanitary latrine, one common bathroom for every three such quarters; and
 - b) In case he is unaccompanied by any other member of his family, a suitable barrack so as to accommodate not more than ten such migrant workmen, having at least a floor area of not less than 6.5 square meters for each such migrant workman making use of the barrack, a verandah and adequate additional covered space for cooking food as well as one common sanitary latrine and one common bathroom for every ten such migrant workmen
2. Every quarter and the barrack shall be so constructed as to afford adequate ventilation, protection against heat, wind, rain and shall have smooth, hard and impervious floor surface.
3. The quarters or the barracks, as the case may be, shall be at a convenient distance from the establishment and shall have adequate supply of wholesome drinking water.
4. The area in which the quarters and/or barracks are located as well as the latrines and bathrooms provided therein shall be kept in a clean and sanitary condition at all times.
5. Regular housekeeping of the labor colony shall be ensured.
6. Availability of Bathing/ washing bay to be ensured

7. Room ventilation and safe electrification to be ensured
8. MSDS of LPG shall be put up prominently and shall be included in the induction training also.
9. The labor colony shall be secure so that only authorized persons have access to it.
10. Availability of local market to be ensured by the Sub-contractor
11. A "Suggestion Register" shall be made available at the labor colony for workers. The feedback shall be reviewed on weekly basis and acted upon.
12. Labor colony shall be inspected fortnightly by Subcontractor Safety Officer & HR executive, and report submitted to BHEL as per Format No. HSEP:4-F16
13. **Facility of Crèches** – to be provided wherein more than fifty female workers are deployed
14. Provisions of Clause 8.4.1, 8.4.2 and 8.4.3 shall be applicable on labor colony as well

8.4.8 PROVISION OF EMERGENCY VEHICLE

Dedicated emergency vehicle shall be made available at workplace by subcontractor for evacuation of victim from site.

However, Ambulance shall be used exclusively for transporting victim to hospital

8.4.9 PEST CONTROL

Regular pest control should be carried out at all offices, mainly laboratories, canteen, labor colony and stores by the subcontractor.

8.4.10 SCRAPYARD

1. Scrapyard shall be developed by subcontractor to store metal scrap, wooden scrap, waste, hazardous waste.
2. Scrap/Waste shall be segregated as Bio-degradable and non-bio-degradable and stored separately.

8.4.11 ILLUMINATION

1. The subcontractor shall provide adequate lighting facilities e.g. flood lighting, hand lamps, area lights etc. to ensure adequate lighting at all work places & their approaches including passage ways as per IS: 3646 (Part-II) at all times. Indicative recommended values are given below:

S. No.	Location	Lux Level
A.	Construction Site	
1	Outdoor areas like store yards, entrance and exit roads	20
2	Platforms	50
3	Entrances, corridors and stairs	100
4	General illumination of work area	150
5	Rough work like fabrication, assembly of major items	150

6	Medium work like assembly of small machined parts	300
7	Fine work like precision assembly, precision measurements etc.	700
8	Sheet metal works	200
9	Electrical and instrument labs	450
B.	Office	
1	Outdoor area like entrance and exit roads	20
2	Entrance halls	150
3	Corridors and lift cars	70
4	Lift landing	150
5	Stairs	100
6	Office rooms, conference rooms, library reading tables	300
7	Drawing table	450
8	Manual telephone exchange	200

In case any area is not mentioned above, the applicable illumination for the same shall be specified by BHEL based on applicable standards and international norms

1. Level of illumination shall be checked periodically using a calibrated lux meter and recorded for each work area on minimum weekly basis as per Format No. HSEP:14-F21
2. Lamp (hand held) shall not be powered by mains supply but either by 24V or dry cells.
3. Lamps shall be protected by suitable guards where necessary to prevent danger, in case of breakage of lamp.
4. Emergency lighting provision for night work shall be made to minimize danger in case of main supply failure.

9. HSE TRAINING & AWARENESS

9.1 HSE INDUCTION TRAINING

1. All persons entering into project site shall be given HSE induction training before being assigned to work, which shall be imparted through audio-visual medium and shall be of minimum 2-hour duration.
2. Any single trainee batch size should not exceed 40.
3. Proper safety wear & gear must be issued to all the workers being registered for the induction (i.e., Shoes/Helmets/Goggles/Leg guard/Apron etc.)
 - i. They must arrive fully dressed in safety wear & gear to attend the induction.
 - ii. Any one failing to conform to this safety wear& gear requirement shall not qualify to attend.
4. In-house induction training subjects shall include but not limited to:

- i. Briefing of the Project details and importance of employee for the project and for the nation.
 - ii. Safety related cardinal rules, objectives and targets.
 - iii. Site HSE rules.
 - iv. Site HSE hazards and aspects.
 - v. First aid facility.
 - vi. Emergency Contact No. and procedures
 - vii. Details of Fire prevention and emergency response systems & procedures at site.
 - viii. Requirement of incident / near miss reporting by all.
 - ix. Accident case studies
 - x. Rules to be followed in the labor colony (if applicable)
5. Evaluation to be carried out after training and induction training to be repeated in case of failure of participant in evaluation
 6. On completing subcontractor's in-house HSE induction, each employee shall sign an induction training form (format no. HSEP: 14-F03) to declare that he had understood the content and shall abide to follow and comply with safe work practices. They may only then be qualified to be issued with a personal I.D. card, for access to the work site (provided Health Checkup is over).

9.2 HSE TOOLBOX TALK

1. HSE Tool Box talk shall be conducted by frontline foreman/supervisor of subcontractor to specific work groups daily prior to the start of work. The agenda shall consist of the following:
 - i. Visual checkup of workers regarding health, any signs of fatigue, intoxication etc.
 - ii. Details of the job being intended for immediate execution.
 - iii. The relevant hazards and risks involved in executing the job and their control measures.
 - iv. Specific site condition to be considered while executing the job like high temperature, humidity, unfavorable weather etc.
 - v. Recent non-compliances observed.
 - vi. Appreciation of good work and warning for any unsafe acts done by any person.
 - vii. Any doubt clearing session at the end
2. Record of Tool box talk shall be maintained as per Format no. HSEP:14-F04

9.3 TRAINING ON HEIGHT WORK

Due to the large percentage of fall from height in incidents, training of minimum 2-hour duration on height work shall be imparted to all height workers by in- house / external faculty for every batch of new inductees. The training shall include following topics:

1. Inspection of work area, access and egress w.r.t height hazards
2. Use of PPEs; use of fall arrester, retractable fall arrester, life line, safety nets etc.
3. Safe climbing through monkey ladders.
4. Inspection of PPEs.
5. Medical fitness requirements.
6. Mock drill on rescue at height.
7. Dos & Don'ts during height work.

8. Accident case studies

In case, above is organized by BHEL, proportionate cost shall be borne by subcontractors

9.4 HSE TRAINING DURING PROJECT EXECUTION

1. HSE training shall be arranged by subcontractor as per the need of the project execution and recommendation of BHEL.
2. The topics of the HSE training shall be as follows but not limited to:
 - i. Hazards identification and risk analysis & Identification of Environmental Aspects / Impacts
 - ii. Work Permit System
 - iii. Learning from past incidents
 - iv. First aid, Firefighting & Fire-warden training
 - v. EMS and OHSMS
 - vi. T & Ps fitness and operation
 - vii. Electrical & Chemical safety
 - viii. Welding, NDE & Radiological safety
 - ix. Material handling.
3. Safety awareness and on-the-job training programmes shall be carried out at site for all workers periodically. Periodicity to be decided by BHEL but shall be minimum once in six months
4. Penalty Training – In case of any incident, the involved person, group or agency shall undergo a penalty HSE training for a minimum period of 2 hrs or as decided by BHEL.
5. In case it is not possible to provide training to all workers at once, same shall be imparted in Batch-wise manner so as to cover all workers with specified periodicity.
6. An up-to-date record to be maintained with attendance of participants and trainers preferably in soft copy as per Format No. HSEP:14-F03.
7. Every employee of agency should be provided at least 2 hr. safety training in every month.

In case, above is organized by BHEL, proportionate cost shall be borne by subcontractors

10. HSE PROMOTION: SIGNAGE, POSTERS, COMPETITION, AWARDS ETC

10.1 DISPLAY OF HSE POSTERS AND BANNERS

Site shall arrange appropriate posters, banners, slogans in local/Hindi/English languages at work place.

10.2 DISPLAY OF HSE SIGNAGE

Appropriate HSE signage shall be displayed at the work area to enhance awareness of HSE workmen and passersby about the work going on and do's and don'ts to be followed.

10.3 COMPETITIONS ON HSE, AWARDS & REWARDS

1. Subcontractor shall arrange competitions (slogan, poster, essay etc.) on HSE for workers and employees from time to time (Safety day, World Environment Day etc. minimum one such function each month) and winners will be suitably awarded during the functions.
2. Subcontractor shall identify workers following good HSE practices and reward them from time to time as encouragement to follow good HSE practices.
3. Alternatively, if a common monthly function is organized at site, subcontractor shall participate in the same so that a minimum frequency of one such function per month is maintained.

10.4 HSE AWARENESS PROGRAMMES

Subcontractor shall arrange HSE awareness programmes periodically on different topics including medical awareness for all personnel working at site from time to time including officials involved in execution.

11. HSE COMMUNICATION AND PARTICIPATION

11.1 MONTHLY HSE REPORTING

1. HSE activities shall be reported to BHEL monthly as per Format no. HSEP: 14-F05. The reporting medium can be hard/soft as per BHEL requirement.
2. The period of reporting shall be 25th of the preceding month to 24th of the present month and report shall be submitted by the end of the calendar month or as conveyed by BHEL.
3. BHEL can modify the reporting requirements as per requirement

11.2 HSE EVENT REPORTING

1. Important HSE events like HSE Training, Mock / Fire/Rescue Drills, Medical camp etc. organized by subcontractor shall be reported to BHEL in detail with photographs
2. Celebration of important days like National Safety Day, World Environment Day etc. shall also be reported likewise.

11.3 HSE INCIDENT REPORTING

All incidents (near misses, property damage, first-aid cases, minor, major and fatal incidents) shall be reported to BHEL as they happen through SMS and Hard/Soft copy as per Format No. HSEP: 14-F22

11.4 HSE SUGGESTIONS

All workers and employees to be encouraged to provide suggestions for improvement in

Health, Safety & Environment at site. The suggestions to be recorded in a "Suggestions Register". Suggestions to be reviewed and those having potential of significant beneficial effects are to be implemented, and recognition / award to be given to the individual.

11.5 CLIENT COMMUNICATON

All HSE related communication from BHEL, customer / external statutory and regulatory agencies to be handled on priority. The relevant issues to be resolved in expeditious manner

11.6 RECORDS OF COMMUNICATON

Records of all communication and their responses as detailed above shall be maintained by subcontractor in hard / soft copy and produced when required.

12. INCIDENT REPORTING, INVESTIGATION & CORRECTIVE ACTION

1. A conducive environment for reporting of near misses and other incidents shall be developed at site through system of rewards etc.
2. Priority to be given to ensure medical treatment of the victim. Victim to be given immediate First Aid and transported to Medical Facility in a well-equipped Ambulance
3. All incidents, as they happen, shall be reported to BHEL immediately over phone/SMS/Whatsapp/mail and then in Format No. HSEP:14-F22 within 24 hrs. of occurrence. Immediate SMS shall be sent to concerned Package In-charge with following Details:

- a. Project & Customer Name:
- b. Subcontractor Name & Scope:
- c. Incident Area:
- d. Number of Injured / Fatalities:
- e. Date & Time of Accident:
- f. Incident Description in few lines:

No incident shall be hidden

4. Records of all incidents shall be maintained in hard / soft copy as per Format No. HSEP:14-F23.
5. For all incidents:
 - a. The incident area, equipment / tools involved, documents & records etc. shall be maintained as-it-is pending investigation
 - b. Root Cause Analysis (RCA) to be conducted and corresponding Corrective / Preventive Action (CAPA) ensured
 - c. Responsibility shall be assigned and action to be taken against the erring individual
 - d. In case presence of manufacturer of the equipment involved is required, subcontractor will arrange the same

- e. All expenses pertaining to the RCA / CAPA shall be borne by the subcontractor
- 6. RCA and CAPA reports of all near misses and minor injuries shall be identified and report submitted to BHEL within 7 days of occurrence.
- 7. For incidents, where worker does not resume duty within 48 hours of occurrence, Joint investigation along with BHEL shall be conducted within 7 days, and CAPA ensured.
- 8. Corrective action shall be immediately implemented at the work place. Work shall be put on hold in the area till corrective actions are verified by BHEL
- 9. All incidents, their Root Cause Analyses and Corrective actions shall be recorded, and analyzed so as to identify weak areas and actions to be taken to reduce the incident trend.

13. SAFETY DURING WORK EXECUTION

13.1 HSE SYSTEMS AND PROCEDURES

BHEL Power Sector HSE Management System (HSEMS) shall be referred for controlling hazards, aspects, and carrying out HSE activities at site. Subcontractor shall get familiar with and follow the HSEMS documents provided by BHEL which include the follows:

13.1.1 HSE PROCEDURES:

All HSE Procedures defined in HSEMS, as referred in various sub-clauses of this Section as given in Annexure 01

13.1.2 PERMIT TO WORK (PTW) SYSTEM

1. The following activities shall be carried out by the subcontractor strictly after obtaining Permit to Work (PTW) from BHEL
 - i. General Work Permit (**Format No. HSEP14-FP01**)
 - ii. Height working (**Format No. HSEP14-FP02**)
 - iii. Hot working (**Format No. HSEP14-FP03**)
 - iv. Confined space Work (**Format No. HSEP14-FP04**)
 - v. Excavation more than 2-meter depth (**Format No. HSEP14-FP05**)
 - vi. Radiography / Radiation Work (**Format No. HSEP14-FP06**)
 - vii. Heavy / Complex / Critical Lifting Activity (**Format No. HSEP14-FP07**)
 - viii. Night / Holiday Work (**Format No. HSEP14-FP08**)
 - ix. Material Loading / Unloading Permit (**Format No. HSEP14-FP09**)
 - x. Grating / Safety Net / Safety Facility Removal Permit (**Format No. HSEP14-FP10**)
 - xi. Live Electrical Maintenance etc. - Lockout / Tag (**Format No. HSEP14-FP07**)

2. The above list is not exhaustive. BHEL reserves right to introduce additional Permits or modify requirements for usage of existing Permits. The conditions for using the Permit are specified in the Format (General Requirements).
3. Where customer is having separate Work Permit System the same shall be followed in conjunction to ensure all activities and checks are covered in all systems.
4. Permit applicant shall apply for work permit of particular work activity at particular location before starting of the work along with Job Hazard Analysis.
5. All Permit signatories shall physically visit the work area and check that all the safety control measures necessary for the activity are in place. Only then the permit shall be issued.
 - a. Signatory shall physically visit the area of work and ensure all required safeguards before signing the Permit
 - b. Signatory shall periodically visit the area to confirm the availability of required safeguards throughout the currency of the permit
 - c. In case any Permit requirement is not available, work will be stopped till it is made available
6. Permit holder shall implement and maintain all control measures during the period of permit. The permit will be closed after completion of the work and submitted to BHEL.

13.1.3 Operational Control Procedures

1. All applicable OCPs (Operational Control Procedures) as identified from outcomes of HIRA, Aspect / Impact studies and BHEL inputs will be followed by subcontractor. This will be done as part of normal scope of work.
2. Illustrative list of such OCPs is given in Table 13.1 and same will be made available to subcontractor by BHEL during work execution at site.
3. In case any other OCPs are required or existing ones need to be modified in order to control the risks / impacts associated with any activity during the execution of work subcontractor shall prepare / update and follow the same with information to BHEL.

Table 13.1 - LIST of Reference OCPs

No.	Topic	No.	Topic	No.	Topic
0	General Safety	22	Steam blowing	44	Material preservation
1	Handling of chemicals	23	Working in confined area	45	Electro-resistance heating
2	Electrical safety	24	Operation of passenger lift, material hoists & cages	46	Blasting
3	Energy conservation	25	Vehicle/ Crane maintenance	47	Transformer charging
4	Welding and gas cutting operation	26	Radiography	48	Handling of battery system
5	Fire safety	27	Waste disposal	49	DG set
6	Use of hand tools	28	Handling & storage of mineral wool	50	Sanitary maintenance
7	First aid	29	Working at night	51	Piling rig operation

8	Food safety at canteen	30	Computer operation	52	Passivation
9	Use of cranes	31	Storage in open yard	53	EDTA Cleaning
10	Storage and handling of gas cylinders	32	Drilling, reaming and grinding(machining)	54	Chemical cleaning of Pre boiler system
11	Manual arc welding	33	Stress relieving	55	Boiler Light up
12	Use of helmets	34	Hydraulic test	56	Rolling and Synchronization
13	Good house keeping	35	Trial run of rotary equipment	57	Loading of Unit
14	Safe excavation	36	Batching	58	Air compressor
15	Working at height	37	Cable laying/tray work	59	Hydra Operation
16	Filling of hydrogen in cylinder	38	Spray insulation	60	Duct/ Structure Preassembly
17	Illumination	39	Compressor operation	61	Resumption of construction activities after lockdown and prevention of coronavirus infection during site operation
18	Handling and erection of heavy metals	40	Gas distribution test	61A	Prevention of Covid-19 infection in labour colony
19	Acid cleaning	41	Cleaning of Hotwell / Deaerator	62	Truss/ Structure fit-up & alignment
20	Oil flushing	42	Electrical maintenance		
21	Alkali boil out	43	O&M of control of AC plant & system		

13.2 ACTIVITY SPECIFIC REQUIREMENTS FOR SAFETY:

All Work shall be commenced only after taking the respective Work Permits (as applicable) and precautions as per relevant codes, systems and OCPs in order to ensure safe conditions throughout the duration of work. Additionally, activity specific safeguards as per this section shall be followed.

13.2.1 WORK AT HEIGHT:

1. All work at height above 2 meter above ground level without complete platforms, handrails and other related fall protection shall require a work permit in the prescribed form. This shall require approval by the competent authority. The HSE officer of sub-contractors shall follow the checklist religiously by physically verifying the condition of the work area before recommending for approval.
2. Prior to the start of work at elevation, the HSE Officer involved with the work must meet the work supervisor to review the scope of work, and must review all the possible fall hazards and effective safety responses. The evaluation / analysis must be documented and kept on file and on site by the HSE Officer.

3. Whenever a fall hazard or other exposure exists for working at heights more than 2.0m/6ft, the nature and scope of work will be evaluated for conditions and environmental factors before selecting the appropriate fall protection system (active, passive or a combination of measures, as appropriate).
4. All Engineering and Administrative Controls including barricading, safe platform, Safety Nets etc. shall be made available at work location. Under no circumstances, there shall be total reliance on PPEs only

5. Safety Nets

- a. Contractor shall maintain sufficient stock of Safety Nets for deployment
- b. Safety Nets as per IS: 11057:1984 should be used extensively for prevention / arrest men and materials falling from height.
- c. The safety nets shall be fire resistant, duly tested and shall be of ISI marked.
- d. Safety Nets shall be deployed below all platforms where height work is envisaged. Duration of work, delay shall be no excuses for non-installation of Safety Net
6. Reaching beyond barricaded area without lifeline support, moving with support of bracings, walking on beams without support, jumping from one level to another, throwing objects and taking shortcut must be discouraged.
7. Monkey Ladder shall be fitted with cages. Rope ladder should be discouraged.
8. In case of pipe-rack, persons should not walk on pipes and walk on platforms only.
9. In case of roof work, walking ladder/ platform should be provided along with lifeline and/ or fall arrestor.
10. For chimney or structure painting, both hanging platform and men should be anchored separately to a firm structure along with separate fall arrestor.
11. The procedures for the safety response to identified fall hazards developed and rescue plans must be reviewed with all individuals exposed to the hazards.
12. The HSE Officer must establish an inspection process of fall protection systems. Some equipment requires documented inspections by its manufacture on a regular schedule. Such equipment must have evidence of the inspection and re-certification process on it. This information must be reviewed before the equipment is actually used. Individuals must visually inspect the fall protection equipment before each use. Failure to complete this inspection process could result in serious injury or death.
13. Immediately remove from service any fall protection equipment that is identified as defective, damaged, or has been subjected to an impact. Damaged fall protective equipment must be destroyed to prevent re-use and not be discarded into trash containers, as the worn or

damaged equipment could be unintentionally re-used.

14. Aerial lifting devices, excluding scissor lifts require the use of full body harnesses and lanyards in any elevated position.

13.2.1.1 Personnel fall protection system must include:

a. Safety Harness

All height workers must use Safety harness with double lanyards. The primary lanyard is never unhooked until the secondary lanyard is secure. The design of the working platform should be such that **under no circumstances, worker should have both lanyards unhooked while at height.**

b. Lanyard

- i. The type of work and the environment conditions determine lanyard and lifeline selection. If welding, chemical cleaning that may damage lanyards, connectors or lifelines, sandblasting, etc., either protect the components or use more appropriate type of system.
- ii. Lanyards and lifelines must incorporate, or be used with, an appropriate deceleration (shock absorbing) device. Deceleration devices include rope grabs, rip-stitch lanyards, specially woven lanyards, tearing, or deforming lanyards, automatic self-retracting lifelines and lanyards which dissipate or limit the energy imposed on the employee during fall arrest.
- iii. Once in use, the system's effectiveness is to be monitored. In some cases, a program for cleaning and maintaining the system may be necessary. Lanyard and lifelines must use locking snap hooks only and under no circumstances must two lanyard snap hooks be connected.

c. Lifeline

All lifelines in general are to be made of min 8mm dia steel rope (plastic coated) and tied to columns with 3 clamps at each end. Wherever columns are not available to tie the lifelines, the vertical posts as per the design below are to be provided after carrying out drop load test initially. A load of 240kg to be dropped off the mid-point of lifeline in this test.

d. Lifeline Post

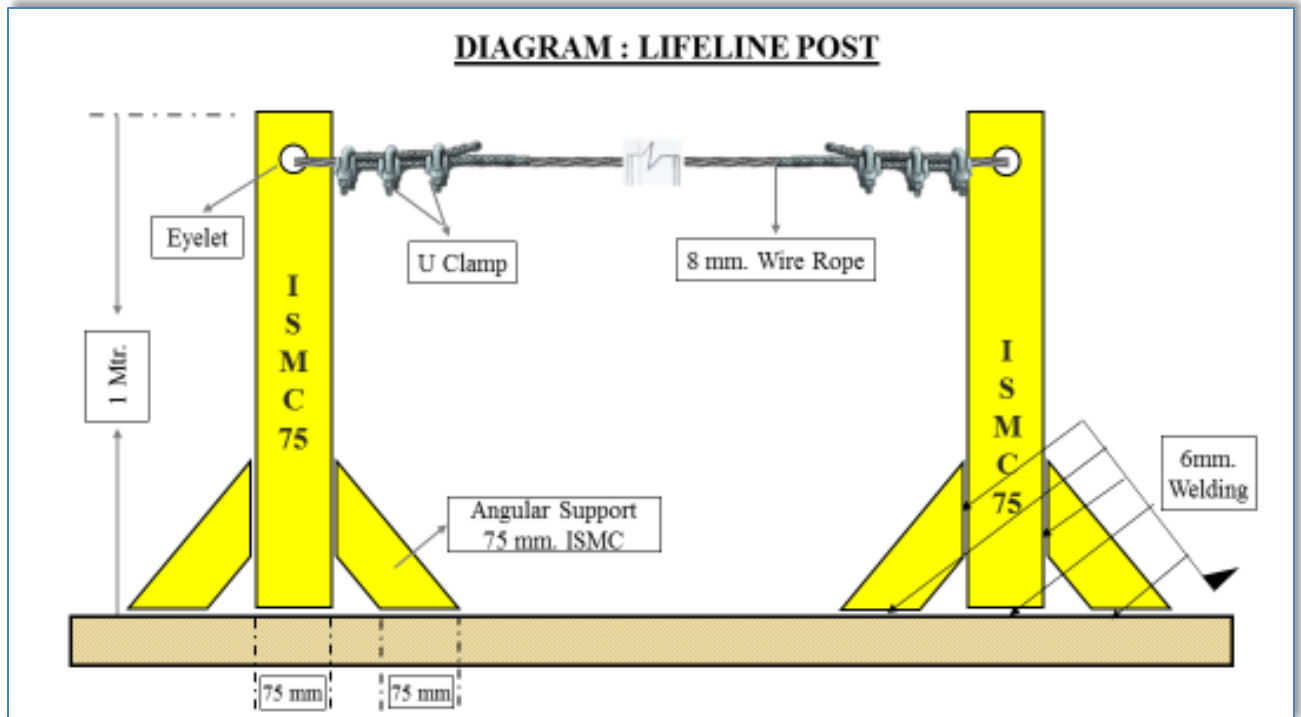


Fig. 13.2.1.1 Lifeline Post

- i. The support at vertical post shall be fixed at end-to-end. The maximum length of one end to another end shall be 18 meters
- ii. If the length of a lifeline is more than 18 meters, then intermediate vertical post(s) are to be used. Such intermediate post(s) will act as supports and the lifeline rope should simply pass through the eyelets (holes) of such supports without being anchored
- iii. The lifeline need not be wrapped / clamped to any intermediate post
- iv. Such intermediate posts must be used at an interval of every 18 meters
- v. The post(s) in which the original lifeline is to be installed should be capable of sustaining a tensile stress of 2268 Kgs
- vi. In a horizontal lifeline installation, maximum allowable sagging is 500-600 mm
- vii. For a single spun lifeline, no more than 2 persons are allowed to work; for more than two workers, another lifeline should be installed
- viii. Horizontal lifeline should be so installed that it does not impede safe movement of workers
- ix. All the installation work must be carried out by competent person with adequate knowledge

13.2.1.2 Working Platform

1. Working platforms, gangways and stairways shall be so constructed that they do not sag unduly or unequally and if the height of the platform gangways provided is more than 3.6 m above ground level or floor level, they shall be closely boarded and shall have adequate width, which shall not be less than 750 mm and be suitably fenced.

2. Precautions against the fall of Materials, Persons and Collapse of Structures

- i. Every opening in the floor or a building or in a working platform shall be suitably barricaded to prevent the fall of persons by providing suitable fencing or railing whose minimum height shall be 90 cm.
- ii. Adequate precautions should be taken such as the provision of fencing, or barriers to protect any person who might be injured by the fall of materials, or tools or equipment being raised or lowered. Cradle may be used for lifting materials - however this shall be made of MS angles and flats only and duly certified by the HSE officer. Operators may also use designed containers for lifting small tools.
- iii. Guardrails (including scaffolding) erected over/adjacent working areas must have the guardrails screened (opening < 0.5), to prevent material from falling outside the platform/decking.
- iv. Guardrails must be able to withstand a 200-pound force exerted in any one direction.
- v. Where necessary to prevent danger, guys, stays or supports should be used or other effective precautions should be taken to prevent the collapse of structures or parts of structures that are being erected, maintained, repaired, dismantled or demolished.
- vi. All openings through which workers are liable to fall should be kept effectively covered or fenced and indicated in the most appropriate manner.
- vii. Guardrails and toe-board/barricades and sound platform conforming to IS: 4912-1978 and other Indian laws and regulations as depicted below should be provided.

Guardrail system

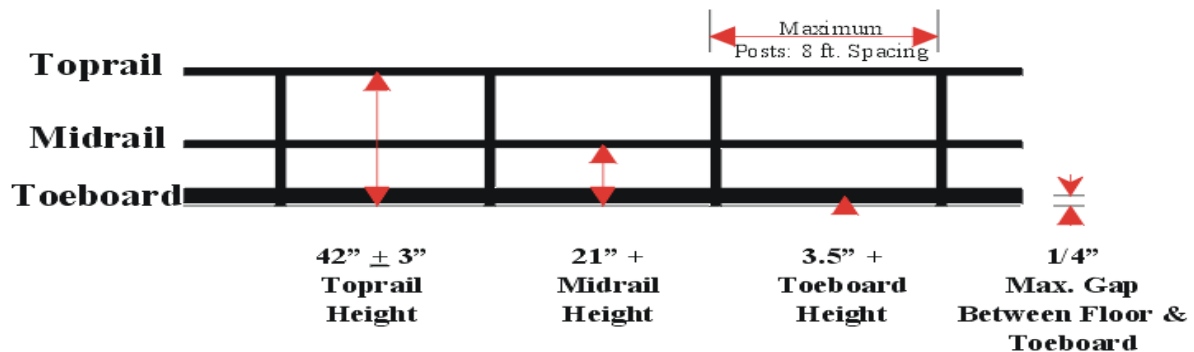


Fig. 13.2.1.2 Guard Rail System

- viii. Guardrails shall be provided to protect workers from falling from elevated work places. The rails are generally made of MS pipes of suitable dia. Rebar shall not be used for any handrails, ladder or cover purpose. Wherever the guard-rails and toe-boards cannot be provided:
 - a. adequate safety nets or safety sheets shall be erected and maintained; or
 - b. adequate safety harnesses shall be provided and used and / or
 - c. adequate fall arrestor shall be provided and used.

As mentioned under PPE clause, all these PPEs shall be defect free and regularly inspected for any defect. The full body safety harness shall have double lanyard only with max 1.8m length.

- ix. The monkey ladders shall have sufficient fall arrestors. Adequate lifelines of 8mm steel wire

rope shall be provided across the work area.

- x. The HSE officer shall recommend appropriate PPEs after analyzing hazards and risks involved.

13.2.1.3 Scaffolding

All scaffolds shall be conformant to the relevant standards including IS 3696 and IS 4014 as applicable. A sketch of the scaffolds proposed to be used shall be prepared and approval of the BHEL Engineer obtained prior to construction / use.

General

1. The scaffolding work must be carried out by a competent person, who shall train the scaffold users on safety aspects
2. All scaffolds shall be erected / dismantled by scaffolding crew under direct supervision of competent scaffolding supervisors.
3. All scaffolds shall be capable of supporting 4 times maximum intended load and erected on sound, rigid footing, capable of carrying the maximum intended load without settling or displacement. Bamboo scaffolding is not permitted for use on site.
4. Each employee on the scaffold shall use an approved safety harness attached to an independent lifeline. The lifeline is to be securely attached to substantial members of the structure (not the scaffold itself) or to securely rigged lines, which shall safely suspend a worker in event of a fall.
5. Guard rails and toe boards shall be installed on all open sides and ends of platforms more than (2) meters above ground or floor
6. Scaffold planks must be at least 5 cm x 25 cm (2" x 10") full thickness lumber scaffold grade or better.
7. Scaffold planks shall not span distances greater than 2.5 meters (8 feet).
8. Scaffold planks shall extend over end supports not less than 6 inches nor more than 12 inches and be secured to the scaffold. Scaffolding and accessories with defective parts shall be immediately repaired or replaced.
9. All scaffolding must be a minimum of two planks wide. No one may work from a single plank.
10. Scaffold planks must be inspected before use. Planks that have been damaged must be removed from the site.
11. Access ladders must be provided for each scaffold. Climbing the end frames is prohibited unless the design incorporates an approved ladder.
12. Adequate mudsills or other rigid footing capable of withstanding the maximum intended load must be provided.
13. Scaffolds more the 6 meters (20 feet) in height must be tied to the building or structure at intervals which do not exceed 4 meters (13 feet) vertically and 6 meters (20 feet) horizontally.
14. Do not overload scaffolds. Material should be brought up as needed. Scaffolding must not be loaded in excess of its rated capacity.
15. Barrels, boxes, kegs, blocks or similar unstable object must never be used as work platforms or to support scaffold.
16. Where persons must work under or pass under a scaffold then a 18 gauge wire mesh screen must be installed between the toe board and guard rail.
17. Employees exposed to overhead hazards while working on a scaffold will be protected by 5 cm (2") thick planks.
18. Wooden/bamboo ladders shall not be allowed at any cost. Ladder's rungs shall be fitted /welded properly. Before every use the rungs should be checked for safe use.

19. Wooden scaffolds shall not be used in areas where fire / fire products are expected
20. Ropes made of jute / Plastic and other fire prone material shall not be used to tie up scaffolding components together
21. The platform should have permanent hand rail and mid rail with Toe board without fail.
22. All platforms are to be tightly planked for the full width of the scaffold, except as may be necessary for entrance openings. Platforms shall be secured in place.
23. On suspension scaffolds designed for a working load of 500 pounds, no more than two workers are permitted to work on the scaffold simultaneously. On suspension scaffolds with a working load of 750 pounds, no more than three workers are permitted on the scaffold simultaneously.

24. Requirements for different types of Scaffolds:

A. Suspended Scaffold

- i. Suspended scaffolds are platforms suspended by ropes, or other non-rigid means, from an overhead structure.
- ii. Requirements for use are to be preapproved by HSE Head, under a specific Permit to Work.

B. Rolling Scaffolds

- i. The height of rolling scaffolds shall not exceed three times the minimum base dimension.
- ii. The minimum base dimension of rolling scaffold will be 1.25 meters (4 feet).
- iii. Adequate help must be provided when moving a rolling scaffold.
- iv. Secure or remove all loose materials, equipment and tools before moving a rolling scaffold.
- v. No one is permitted to ride a rolling scaffold when it is being moved. Castor brakes must be locked-on when the scaffold is not being moved.

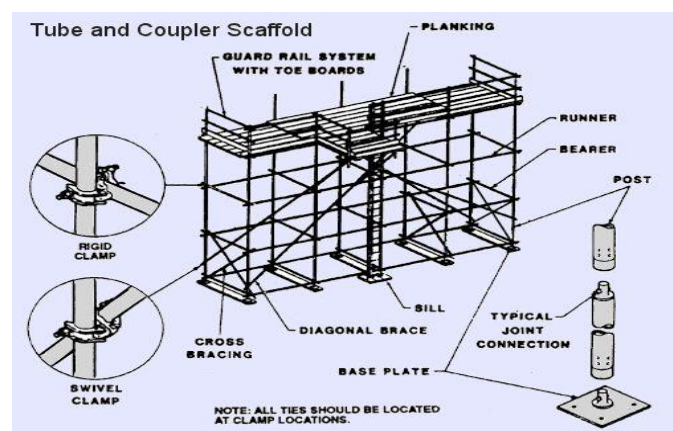
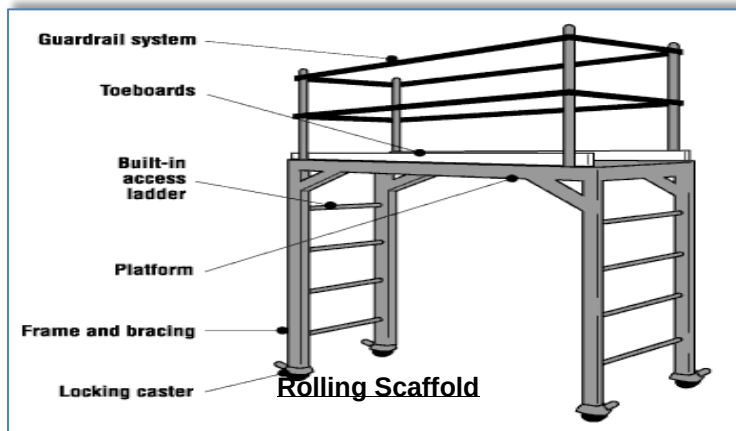


Fig. 13.2.1.3 Types of Scaffolds

25. Scaffold Tagging

Scaffolds being erected, modified or dismantled must be tagged as suitable for use. The scaffolds can only be accessed by those involved with the process.

GREEN scaffold tag- shall be fixed when scaffold is complete and safe for use, signed and dated by

the scaffolding competent person daily.

RED scaffold tag – to be fixed if scaffold is in some way defective and cannot be used or is still under erection.

Examples of scaffold tags:



Fig. 13.2.1.4 Scaffold Tagging

13.2.1.4 Ladder Safety

A sketch of the ladders proposed to be used shall be prepared and approval of the BHEL Engineer obtained prior to construction / use

Safe Use of Ladders:

1. Fall protection is required when working on a ladder above 2 meters and when climbing above nearby guardrails.
2. Ladders must be inspected prior to use and by a competent person quarterly, with documentation.
3. Use portable ladders for height up to 4 M only
4. Provide fixed ladders for height above 4 M
5. Place the ladder at an angle of 75 degrees (approx.) from the horizontal (1:4)
6. Extend ladder at least 1 M above the top landing
7. Secure top and bottom of the ladder firmly to prevent displacement- anti skid lining at the bottom
8. Ensure that the width of the ladder is not less than 300 mm and distance between rungs is not more than 300 mm
9. Provide landings of minimum size 600 x 600 mm at intervals not more than 6 M for fixed ladders. Check the ladders daily for any defects
10. Ensure that the areas around base and top of the ladder are clear. Getting on and off the ladder is more hazardous than using it. Use a mudsill if the ladder is to rest on soft, loose or rough soil
11. Do not use ladders of conducting material near power lines, and only use ladders near power line or other energize system with exposed parts if they are confirmed locked-out and de-

energized.

12. Stand no higher than the fourth rung from the top for carrying out any job standing on a ladder.
13. Never reach out from a ladder to perform work where your belt buckle protrudes past the ladder rung.
14. Always face the ladder while climbing up or down
15. Maintain three-point contact while climbing up or down a ladder i.e. two hands and one foot or two feet and one hand on the ladder at all the times.
16. Avoid climbing up or down a ladder while carrying anything in hands. Lift tools, equipment and materials with a rope.
17. Work from portable and extension ladders near guardrail where fall expose exists over the guardrail regardless of height, and above 2.0 mtr. heights from the working/walking surface will require the use of personal fall arrest equipment

13.2.2 EXCAVATION & CIVIL WORKS

All safety precautions shall be taken for foundation and other excavation marks as per IS-3764.

13.2.2.1 Excavation

The following safety measures are to be ensured before and during excavation:

1. All Excavation activities more than with depth of 1.22 meter or more shall require and Excavation Work Permit
2. Check for underground utilities like electrical / telephone cables, sewage, water lines and proper care has to be exercised to protect and prevent damage to it
3. Proper and adequate slope is maintained while excavating
4. Adequate shoring or sheeting is done wherever require to prevent soil sliding
5. Safe access through ladder or steps for exit & entry to excavation
6. No material /excavated soil is kept within one meter from the edge
7. Safe way is planned and provided for movement of HEM /transport equipment near excavation
8. Safety helmet and shoes/gum boots are provided and worn by the workmen at excavation works
9. Dewatering arrangement is made where water seepage is prevailed.
10. Stop blocks are provided to avoid vehicles reversing into the excavated trenches
11. Danger signs /Caution boards are displayed at work spot
12. Barricading is provided at excavated pits

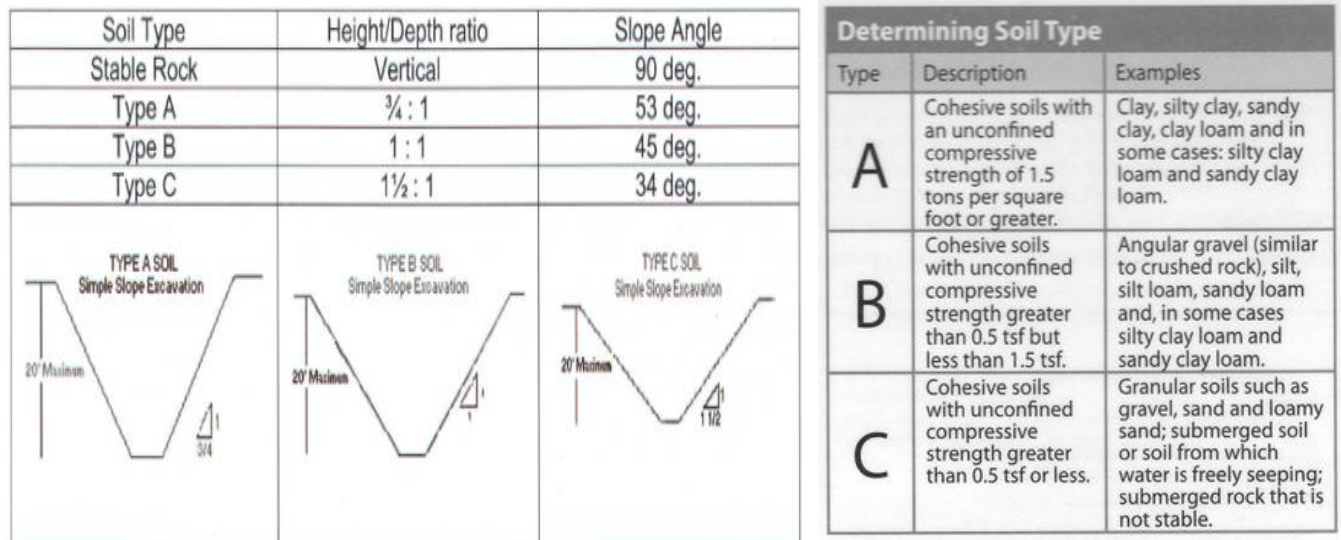


Fig. 13.2.2.1 Excavation Reference

13.2.2.2 Piling

Ensure the following precautionary measures before starting piling works:

1. Inspection of piling equipment by responsible person for its condition before initiating piling operation.
2. Checklist and OCP for piling to be prepared using manufacturer's instructions and used
3. Testing and its certification wire ropes, slings, D-shackles, chain pulley blocks using in the process of piling work by competent person
4. Adequate support and secured foundation of the piling equipment to avoid toppling
5. Hoses should be lashed and adequately secured
6. Proper work platform is to be provided on piling frame
7. Safe work procedures and close supervision to prevent unsafe acts of operators/any unsafe conditions that may arise
8. Only experienced and trained operators are engaged for the piling operation
9. Provision of Personal Protective Equipment (PPE) like safety shoes/gumshoes/safety helmet/safety belt etc. and its use by their workmen.
10. Special care and precautions If work is near electrical live cables/ electrical equipment
11. Cordoning of work area to prevent un authorized entry
12. Guarding of revolving parts
13. Specific measures to prevent over turning of pile driver/missing of hammer/ hammer movement out of range

13.2.2.3 Batching

Following Safety considerations for batching plant are to be ensured:

1. Modern type batching plant should be used in which all the moving parts are protected and

emergency and safety features are incorporated.

2. Installation of external Electric moto-vibrators in the feeding hopper of all batching plants to reduce human intervention.
3. Installation of safety devices like pull-chord on both the sides of conveyor for stopping the conveyor in emergency
4. Workers carrying cement / sand to be given appropriate PPEs like respiratory masks & gloves.
5. Conveyor belt/rotating parts must be guarded properly.
6. Safety awareness shall be inculcated in workmen about the risk involved in rotating parts.
7. The agency shall ensure to erect the batching plant as per drawing including installation of all safety devices as provided by manufacturer and witnessed by BHEL Engineer in charge before starting of machine in future.
8. Safety audit to also focus on Batching plant.
9. The site shall impose penalty on the agency who has violated the safety norms as per contract.

13.2.2.4 Mobile Plant

Mobile plant includes tractors, trailers, dumpers, excavators, bulldozers, road rollers etc. for earthmoving purpose and concrete mixers, concrete transit mixtures, concrete pumps etc for concreting purpose. Due to the very nature of their function and movement in difficult terrains, congested areas, working in tandem with manual work and other operations the danger is inherent. Reverse horn is compulsory for all earth moving machineries.

Following Safety measures to be ensured for Mobile Plant:

1. Where movement around site is involved, routes should be planned, obstruction free and well maintained
2. Observe specified speed limits
3. Operating personnel should be aware of associated risks and its preventive measures
4. Only experienced, trained and authorized persons with valid license (wherever applicable) should operate the mobile equipment/vehicles
5. Provide and use Warning lights and reverse horn for cautioning the people around
6. Operation should be on level and stable ground with adequate working clearance.
7. Loading of out riggers/stabilizers should be well within safe ground bearing capacity
8. No person should be on equipment or vehicle during loading and unloading of material
9. Operators should be protected by warning barriers or switching off power when working in close proximity of overhead power lines
10. The equipment /vehicles should be well maintained and provided with effective brake system and other safety devices (wherever require)
11. Rotating parts of equipment should be adequately guarded
12. Provide necessary personal protective appliances and ensure its use by the operating personnel
Ensure effective measures at source to control harmful emissions, dust, fumes contaminating atmosphere and cause health hazards to the operators and people in the vicinity.
13. No overloading/over stressing of vehicles/plant is allowed
14. Hoses, pipes, receivers, gauges and valves involved in carrying out hydraulic fluid/ compressed air should be checked for leaks and tested prior to operation.
15. Adequate safe clearance for swing and movement is to be judged during operation of Concrete mixer

16. Setting of machine on firm and level ground with wheel locked to prevent movement of machine
17. Proper instructions and Special precautions are to be ensured to prevent entry in to the danger zone of projectile of bucket while dropping bucket
18. Operator leaving work spot should ensure that the equipment/vehicle is kept in neutral position and place on firm and level ground.
19. The hand brake should be kept in position and block road wheels as additional safety measure
20. Blades/buckets should be kept low while moving
21. The dozer blades should not be used as brakes except in emergency
22. The ground should be examined for its bearing capacity and general safety especially when operating road roller at the edges of slopes, embankments.
23. The roller should not be moved downhill with the engine out of gear
24. If operating near excavations the following precautionary measures are to be ensured
25. Barricading, edge protection to prevent fall of persons/vehicles over running while reversing etc.
26. Suitable support system and adequate allowance to avoid the danger of side collapsing
27. Experienced signaler /attendant should be always accompanied with operator/driver for proper direction /signal and also to caution others in the working Zone during operation of mobile plant

13.2.2.5 Concrete Vibrators

1. Revolving parts/belt drives should be adequately guarded and Vibrating unit shall be completely enclosed and have suitable overload relays and effectively earthed
2. Ensure sufficient length of cable to the Vibrator.
3. Ensure electric starters and other accessories are firmly fixed adequately supported
4. Ensure locking of needle load while inserting needle in to the vibrator,
5. Ensure periodical lubrication and maintenance

13.2.2.6 Concrete Mixers

1. Setting of machine on firm and level ground with wheel locked to prevent movement of machine
2. Proper instructions and Special precautions are to be ensured to prevent entry in to the danger zone of projectile of bucket while dropping bucket

13.2.3 WELDING & GAS CUTTING SAFETY (HOT WORK)

1. All Hot Work shall require a Hot Work Permit
2. There shall be flash-back arrestors conforming to IS-11006 at both cylinder and burner ends. Damaged tube and regulators must be immediately replaced.
3. All safety precautions shall be taken for welding and cutting operations as per IS-818.
4. When possible, items to be welded, cut, heated, etc. shall be moved to a safe location free of combustible or flammable material. If this is not possible, then all combustibles/ flammables that can be removed from the area shall be removed within a 35-foot circumference and a positive means of confining arcs and sparks generated by the process shall be ensured and additional person(s) shall be stationed as fire-watch for the area(s) still exposed, along with obtaining the Hot Work Permit as applicable.
5. Appropriate fire-fighting equipment is to be available in close proximity of any welding and gas cutting operations at all times suitable for the type of Fire.
6. Drums, tanks, and similar containers that have contained flammable or toxic material shall not be welded, cut, or heated until they have been made safe by water filling, thorough cleansing or similar accepted practices. The container shall also be ventilated during the welding, cutting, or heating process.

7. Proper ventilation is required for any welding or torch operations performed in a confined space.
8. Any welding or gas cutting operations performed on metals of toxic compounds or coating such as zinc, stainless steel, lead, cadmium, chromium, and beryllium shall be properly ventilated and/or proper respiratory protection shall be worn by any person that could be exposed to fumes, vapors, and gasses created by the welding and gas cutting processes.
9. Wherever it is practical, all arc welding operations shall be shielded to prevent direct light rays or sparks from contacting persons in the vicinity or from reaching areas normally used to travel through or into the vicinity. Where this is not practical, persons who shall be in the area are to use proper eye and skin protection. Other persons who are not participating in the welding or gas cutting operations are not to be allowed into the hazard zone.
10. Welders and other employees who are exposed to arc welding radiation shall wear suitable clothing and protective apparel to prevent burns and other types of ultraviolet radiation damage to the skin.
11. Arc welding machines shall be shut down when being moved or when they are not in continuous use. Electrode holders left unattended shall have electrodes removed and shall not be left where they might contact employees or conducting objects.
12. Arc welding power supply cable shall be of proper rating and material, e.g. copper.
13. Welders shall guard against allowing materials adjacent to or behind them to reflect radiation back toward them or towards others in the area. Reflected radiation can cause skin burns and eye flash burns.
14. Valve caps shall be in place when cylinders are not in use. Valve caps shall never be used for lifting the cylinder vertically.
15. Torches shall only be lit by approved strikers; never with matches, cigarette lighters, or hot-work.
16. **Splatter / Slag Collector**

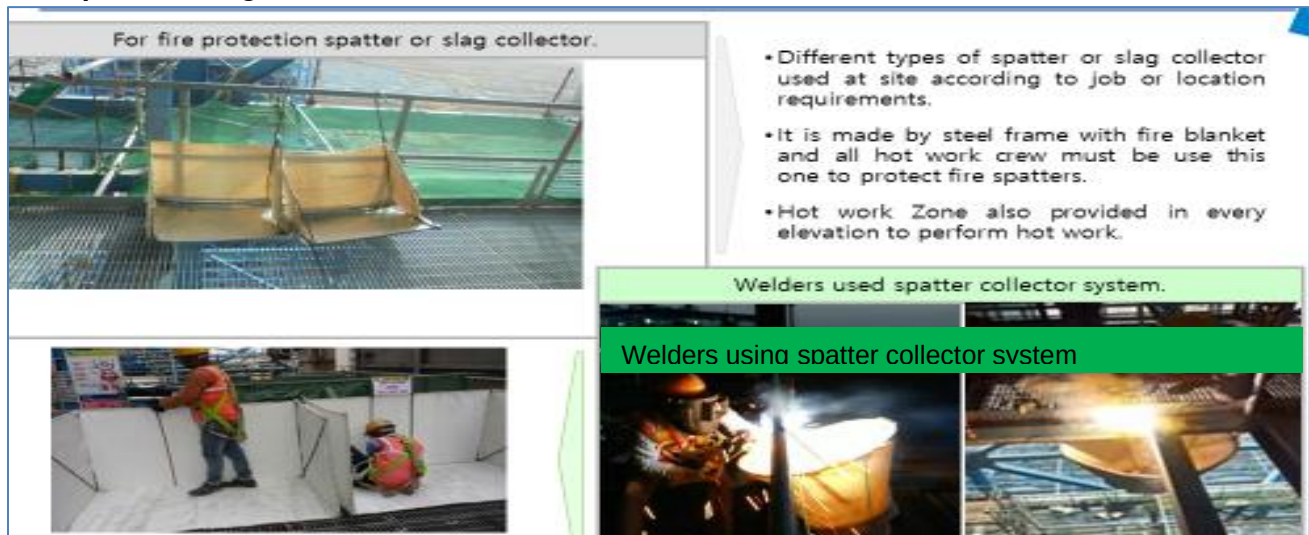


Fig. 13.2.3.1 Splatter / Slag Collector

While carrying out job at height, the sparks or molten slag shall be prevented from falling down by putting a fire-resistant (non-asbestos) sheet or patten/ slag collector or even MS Sheet. The passage of falling sparks or molten slag shall be barricaded till ground floor and any cable/ tubes/ any other objects interfering in the passages hall either be removed or covered with Fire-resistant sheet or MS Sheet.

13.2.3.1 COMPRESSED GAS

1. All cylinder valves shall be closed when any work is finished and when any Cylinders are empty or being moved. Valve protection caps shall be placed and secured properly before gas cylinders are transported, moved or stored.
1. Compressed gas cylinders shall be secured in an upright position with chain or appropriate means during storage & use. However, a trolley shall be used for transportation.
2. Compressed gas cylinders shall always be secured from tipping or falling, whether in use, in storage or in transit. The cylinders shall always be secured upright, except during times when actually being hoisted or carried.
3. When cylinders are transported by powered vehicle they shall be secured in a vertical position.
4. Regulators shall be removed when cylinders are not in use or are in transit, unless the cylinder is firmly secured on a special carrier designed for this purpose.
5. Gas cylinders are not allowed to be used in man-basket when occupied.
6. Cylinders containing oxygen or fuel gasses shall not be taken into confined spaces.
7. Oxygen cylinders shall be stored a minimum of 6 meters from fuel gas cylinders or shall have an approved firewall between them.
2. All cylinders shall be kept at a safe distance from welding or cutting operations or shielded from arc/ sparks / slag.
3. All cylinders shall be placed where they cannot become part of the electrical circuit.
4. Oxygen and acetylene shall not be stored together. Oxygen must be separated from acetylene (or ANY fuel gas) or combustible material by at least 20ft or a barrier with a 30 minute fire resistance rating.
5. All Cylinders should be stored upright in a designated area with labels for the type of gas. All applicable precautions to be ensured during storage
6. Oxygen and fuel gas regulators, hoses and associated equipment shall not be altered and shall be in proper working order while in use.
7. Compressed air can be extremely dangerous if allowed to penetrate the skin. As such, the use of compressed air to clean off yourself or other workers shall be strictly prohibited.
8. All gas cylinders shall be stored in upright position. Suitable trolley shall be used for cylinder movement, the design of which shall be submitted to BHEL Engineer for approval.
9. No of cylinders shall not exceed the specified quantity as per OCP
10. Cylinders shall be moved by tilting and rolling them on their bottom edges. They shall not be intentionally dragged, struck or permitted to strike each other violently.
11. All cylinder should be kept only in cylinder trolley.
12. Cylinder shall be transported in upright vertical position by suitable mean.

13.2.4 LIFTING & RIGGING SAFETY

1. All Heavy / Complex Lifting operations as defined in Clause 6.12 shall require a Lifting Work Permit.
2. All the cranes and lifting tools & tackles shall be inspected on daily / weekly basis as well as

monthly by expert as per applicable formats.

3. In addition, inspection / certification as mandated by law shall be carried out wherein these shall be tested and certificates of fitness shall be obtained from 3rd party State Govt. approved competent agency before deploying at site and later periodically. BHEL shall be given advance intimation of any such inspections
4. The last date of Third Party Inspection and the next Due date shall be conspicuously displayed on all cranes. A copy of certificate shall be pasted on operator's cabin of all the lifting equipment.
5. Following requirements shall be mandatorily followed, wherever applicable:
 - a. The manufacturer's instruction for maintenance shall also be followed. All safety measures shall be followed.
 - b. All tools tackles, lifting appliances; material-handling equipment etc. used by the subcontractor shall be of safe design and construction.
 - c. The operators, slingers and signalers shall be qualified as per IS 13367 (part-1):2003 "Safe use of cranes- code of practices".
 - d. There shall be a person responsible for co-ordination among cranes where multiple cranes are used, and lifting over 75% of the crane capacity to be avoided.
 - e. Mobile phone should be banned for crane operator and lifting operation. Only walki talki shall be allowed in rigging/Lifting purpose.

13.2.4.1 Personnel Lifts (Man-Basket / Jhoola):

The design of personnel man basket shall be submitted to BHEL Engineer for approval before use. Relevant permit (Height work & others as applicable) shall be completed prior to lifting any people, along with a rigging plan.

- a. A separate Lifeline / Fall arrestor anchored to a fixed structure outside of Jhoola shall be provided for the workers inside the basket. All occupants of the basket shall have Safety Harnesses equipped with rope grabs, which are to be hooked to the vertical lifeline.
- b. Man-basket shall be used where access through ladders or scaffolding is not feasible.
- c. Man-baskets shall be designed and engineered by a manufacturer (job made man-baskets are not allowed, unless designed and tested by a certified engineer), and built robust with MS Angles and flats or plates or channels only.
- d. Guard rails top and mid, must be in place and screened-in to avoid material from falling out of basket. The factor of safety shall be 200%.
 - e. It shall have a door with double latches and shall open inside. Anchor points shall be identified within the man-basket.
- f. The man-basket shall be thoroughly inspected and load tested and a trial run performed without personnel before being put to job.
- g. It shall be treated as a lifting tool (T&P Item) and shall undergo same certification cycle and inspection as other lifting equipment.
- h. An additional sling of required lifting capacity shall be fixed the man-basket main lifting point and attached to the crane above the ball or block.

- i. While lifting man-basket, the crane shall maintain a uniform speed of lift without any swing.
- j. Once man-basket reaches the destination, the lift brakes shall be locked as long as the basket remains at that point. The same care shall be taken in its descent.
- k. As for hanging man-basket, the same shall be hung off a rigid structure with help U-shaped handle welded to man-basket. This shall be tested once in a year by a competent person.
- l. Use of Rebar steel for making and monkey-ladder must be avoided.

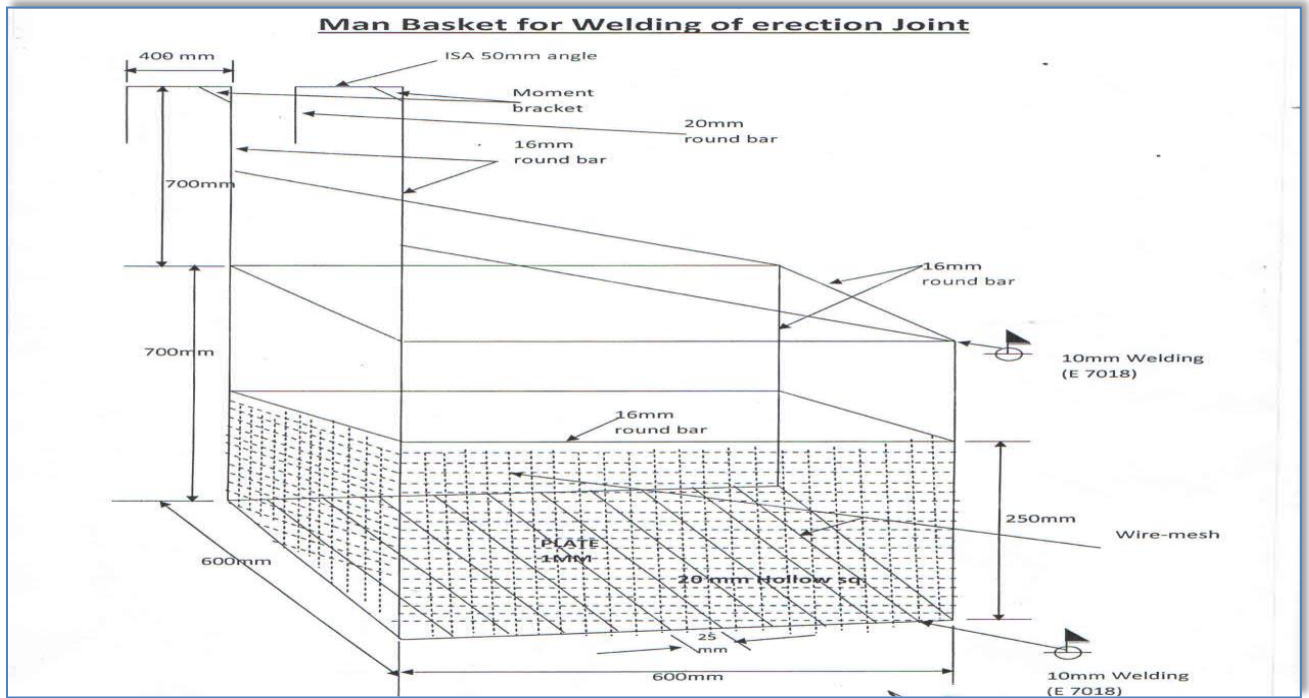


Fig. 13.2.4.1 Man Basket for Welding Erection Joint

13.2.4.2 Cranes & Hoisting Equipment:

This section provides the guidelines to ensure proper rigging and lifting activities are accomplished safely and in accordance with applicable specifications, codes, and regulations.

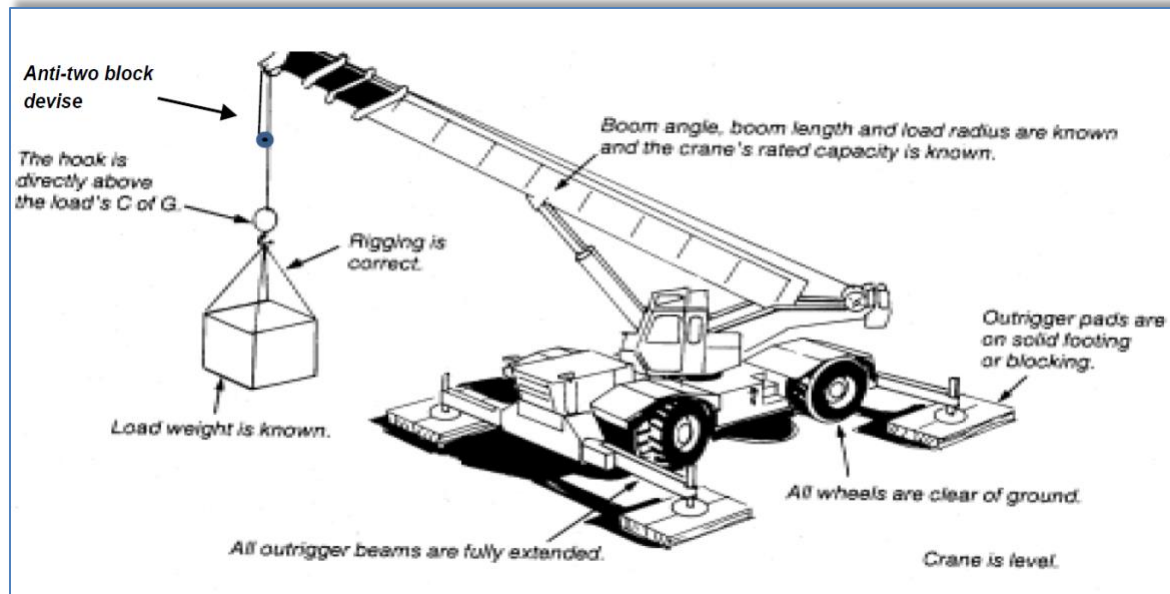


Fig. 13.2.4.2 Proper Crane Setup

- a. On every crane or piece of hoisting equipment notices of all rated load capacities, recommended operating speeds, and any hazard warnings or special instructions shall be conspicuously posted. All instructions and warning shall be visible from the equipment operator 's station.
- b. Cranes shall have an Anti-Two-block safety device installed
- c. All mobile cranes shall have overload and backup alarms, load angle indicators and limit switches
- d. All areas within swing radius of cranes that are potentially accessible by pedestrian, vehicular, or equipment movement shall be barricaded to prevent anyone or any vehicle or equipment from being struck by the crane or hoisting equipment, or its load(s).
- e. No part of the lifting equipment or its load shall be within the distance as specified in the Indian Electricity Act from an energized power line
- f. Cranes shall have annual certified third party inspection and be inspected before use by the operator. Any defects shall be corrected before use. Logs of crane inspection shall be kept with the crane.
- g. Make certain that the rigging personnel, material, and equipment have the necessary capabilities for the job and are in safe condition.
- h. Communicate with person(s) directly responsible for accomplishing the work and / or work area to establish requirements/responsibilities and make certain that all preparatory work is complete.
- i. Mats/Pads must be used on all lifting equipment, equipped with out riggers.
- j. Pick and carry must have the load secured to the rig in front.
- k. Only BHEL Approved Plate Lifting Spreader Beam configuration shall be used (Sample in Fig. 13.2.4.2)

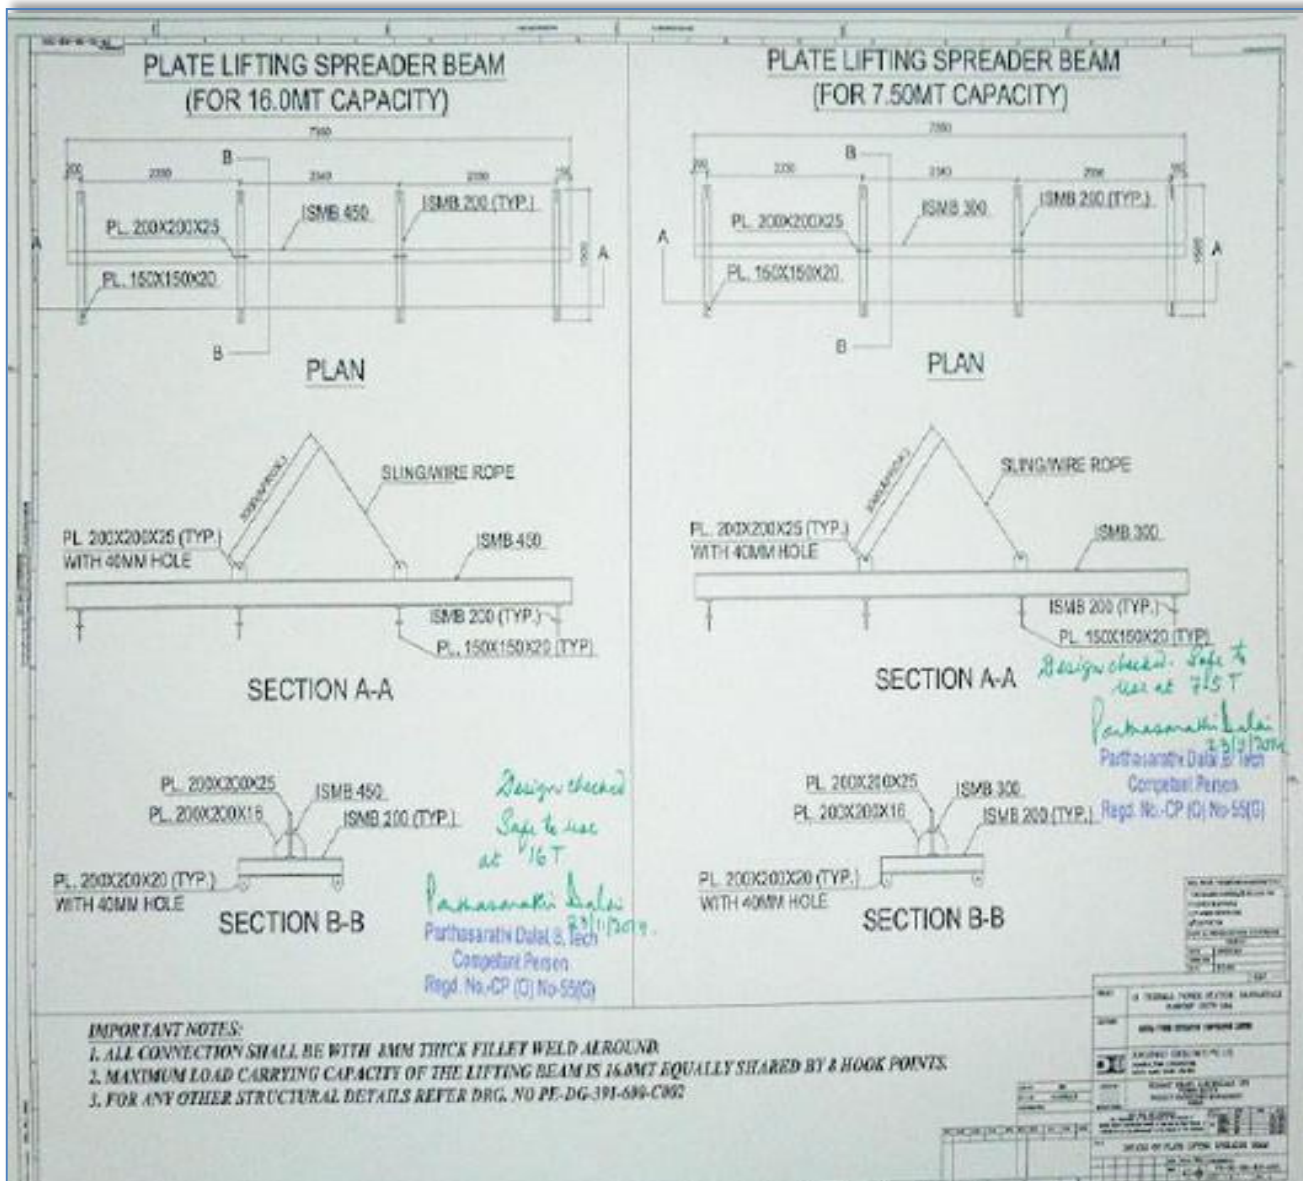


Fig. 13.2.4.3 Typical Plate Lifting Spreader Beam Configuration for 7.5 MT and 15 MT Loads

I. Crane operators must follow the following:

1. Pass an annual Operator's Physical examination
2. Carry a valid training certification card at all time while operating issued by the Govt. or other recognized institute.

13.2.4.3 SAFE RIGGING PRACTICES

13.2.4.4

- a. Review the planned operation and requirements with the operator and rigging crew.
- b. Ensure a pre-lift meeting is conducted with crane operator, tagline operator, signal personnel, and Safety Manager.
- c. Designate a qualified person from the rigging crew to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means.
- d. Clear the lift area of all unnecessary personnel.
- e. Hydras shall only be allowed for loading & unloading works & shall not be allowed to move with load

13.2.4.4.1 RULES FOR SAFE RIGGING

1. Use loops, thimbles and corner pads to prevent damage to slings when used around corners or on cutting edges.
2. Never allow wire rope to lie on the ground for any length of time or on rusty steel or near solvents, chemicals or corrosive substances.
3. Slings must not be pulled from between or under loads with load resting on the sling.
4. Keep all rope away from flame cutting or welding operations.
5. Never use rope as sling material.
6. Never wrap a wire rope completely around a hook.
7. Do not bend wire rope near any attached fitting.
8. The sling must be selected to suit the most heavily loaded leg rather than the total weight when using multi-legged sling to lift loads in which one end is heavier than the other.
9. When using 3 and 4 legged sling configurations, any two legs must be capable of supporting the entire load.
10. Where possible, wire rope choker hitches must include a shackle with the eye around the shackle pin to prevent breaking wires of the choke. The choker hitch must be "snugged down" prior to lifting, not after tension is applied.
11. Unless authorized by the hook manufacturer when more than two rope eyes are placed over a hook, install a shackle, pin resting in the hook, and place the rope eyes in the bowl of the shackle.
12. Properly rig all loads to prevent dislodgment of any part.
13. Use guide ropes or tag lines to prevent the rotation or uncontrolled motion of the load when necessary.
14. Loads must be safely landed and properly blocked before being unhooked and unslung. Tag lines must not be used in situations that jeopardize the safety of the lift.
15. Lifting beams must be plainly marked with their weight and designed working load and must only be used in the manner for which they were designed.

16. The hoist rope or chain must never be wrapped around the load. The load must be attached to the hook by slings or other rigging devices that are adequate for the load being lifted.
17. Multiple part lines must not be twisted around each other.
18. The hook must be brought over the center of gravity of load before the lift is started.
19. If there has been a slack rope condition, determine that the rope is properly seated on the drum and in the sheaves prior to lifting.
20. Keep hands away from pinch points as the slack is being taken up.
21. Leather gloves are recommended when handling wire rope.
22. Avoid impact loading caused by sudden jerking when lifting or lowering. Lift the load gradually until the slack is eliminated.
23. Never ride on a load that is suspended.
24. Avoid allowing the load to be carried over the heads of any personnel.
25. Never work under a suspended load until the load has been adequately supported from the floor and all conditions have been approved by the supervisor in charge of the operation.
26. Never leave a load suspended unless emergency evacuation is required.
27. Never make temporary repairs to sling.
28. The capacity of a sling is determined by its angle, construction, type of hitch and size.
29. Never lift loads with one leg of a multi-leg sling until the unused legs are made secure.
30. Never point load a hook unless it is especially designed and rated for such use.
31. Make certain that the load is broken free before lifting and that all legs are taking the load.
32. When using two or more slings on a load make certain all slings are made from the same materials.
33. Lower the loads on to adequate blocking to prevent damage to the slings.
34. Materials and equipment being hoisted must be loaded and secured to prevent any movement which could create a hazard in transit.
35. The weight of the hook, load block and any material handling devices must be included when determining crane capacity.
36. Calculated weights cannot exceed 75% of the chart without written approval.
37. Personnel must be completely clear of loads being picked up or set down by crane. Tag lines will be used to control the loads. Loads must not be touched by hand while placing/ moving.

13.2.4.4.2 SLINGS

a. Synthetic Slings

The following are rules for safe use of synthetic slings:

- i. Synthetic slings must be marked to show the rated capacity for each type of hitch and type of web material.
- ii. Nylon web slings must not be used where fumes, vapors, sprays or mists or liquids of acids or phenolic are present. Web slings with aluminum fittings must apply in this category.
- iii. **Synthetic web slings must be removed from service and destroyed if any of the following conditions are present:**

- a. Acid or caustic burns
- b. Melting or charring of any part of the sling surface
- c. Snags, punctures, tears or cuts
- d. Broken stitches
- e. Distortion of fittings
- f. Synthetic web slings of polyester or nylon must not be used at or come in contact with temperatures in excess of 82°C
- g. Polypropylene web slings must not be used at or come in contact with temperatures in excess of 93°C
- h. Insulated hooks must be tested yearly to insure insulation integrity to at least manufacturer's specifications.

iv. Wire Rope Slings must be removed from service and destroyed if any of the following conditions are present:

- a. In (10) randomly distributed wires broken in one (1) rope lay, or five (5) broken wires in one (1) strand in one (1) rope lay.
- b. Wear or scraping of one-third the original diameter of outside wires.
- c. Kinking, crushing, bird caging or any other damage resulting in distortion of the wire rope structure such as:
- d. Evidence of heat damage.
- e. End attachments that are cracked, deformed worn.
- f. Corrosion of the rope or end attachments.

v. Metal mesh slings must be immediately removed from service if any of the following conditions are present:

- a. A broken weld or broken brazed joint along the sling edge.
- b. Reduction in wire diameter of 25 percent due to abrasion or 15 percent due to corrosion.
- c. Lack of flexibility due to distortion or corrosion.

vi. Synthetic web slings must be removed from service and destroyed if any of the following conditions are present:

- a. Acid or caustic burns
- b. Melting or charring of any part of the sling service
- c. Snags, punctures, tears or cuts
- d. Broken stitches
- e. Distortion of fittings

vii. Requirements of Plate Clamps:


- 1. The rated load of the plate clamp must be marked on the main structure.
- 2. Care must be taken to make certain the load is correctly distributed for the plate clamp being used.
- 3. Do not allow load or plate clamp to come into contact with any obstruction.
- 4. The plate clamp must not be used for side pulls or sliding the load.
- 5. When lifting stainless steel or special alloys, ensure plate clamp is designed for use on

the specific metal.

13.2.4.4.3 SIGNALING PRACTICES:

- The "slinger" is responsible for attaching and detaching the load to and from the crane. He shall:
 - have received appropriate training on general safe lifting operations;
 - be capable of selecting lifting gears suitable for the loads;
 - liaise with the operator and direct the movement of the crane safely.
- The "signaller" is responsible for relaying the signal from the slinger to the crane operator. He shall:
 - have received appropriate training on general safe lifting operations;
 - be able to direct the movement of the crane and loads.

Suggested hand signals

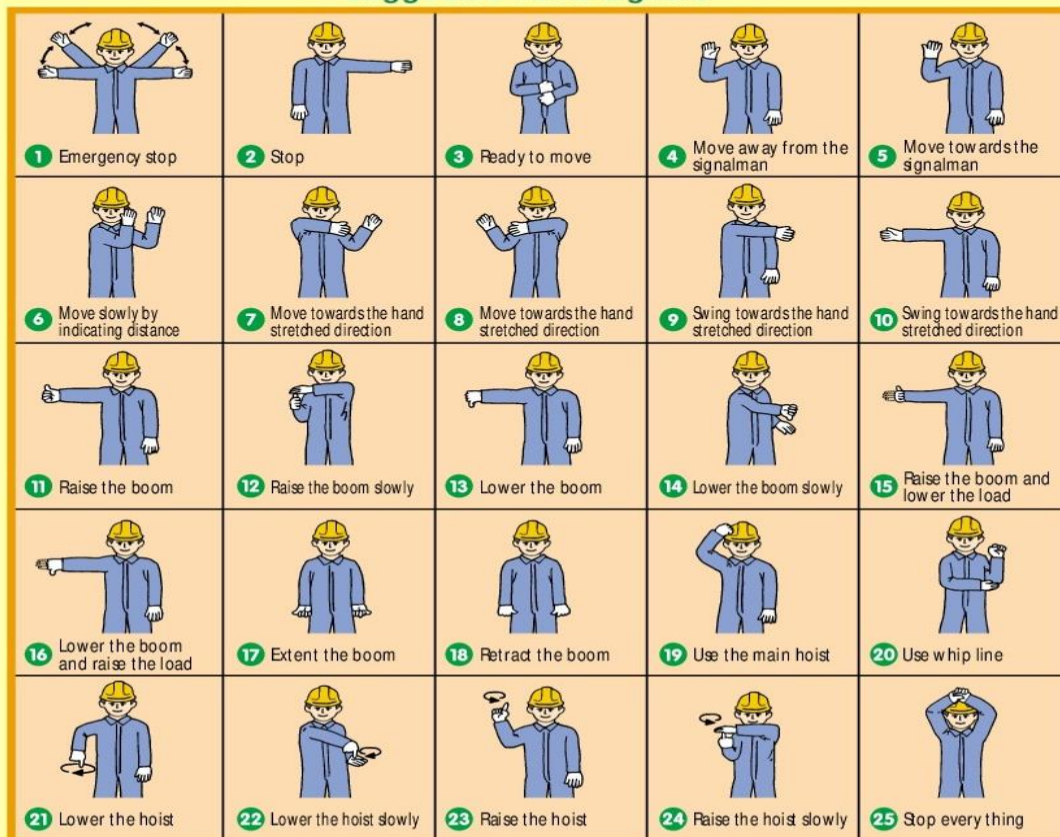

Note: During the lifting operation, either the slinger or signaller shall communicate with the operator. Other communication methods (e.g., wireless walkie-talkies, telephones, etc.) may also be used.

Fig. 13.2.4.4 Recommended Signalling Practices

13.2.5 DEMOLITION WORK

Before any demolition work is commenced and also during the process of the work the following shall be ensured, besides using the Work Permit:

1. All roads and open areas adjacent to the work site shall either be closed, suitably protected or restricted for movement
2. No electric cable or apparatus which is liable to be a source of danger nor a cable or an apparatus used by the operator shall remain electrically charged.
3. All practical steps shall be taken to prevent danger to persons employed from the risks of fire or explosion or flooding. No floor, roof or other part of the building shall be so overloaded with debris or materials as to render them unsafe.

13.2.6 T&Ps General

1. All T&Ps/ MMEs should be of reputed brand/appropriate quality & must have valid test /calibration certificates bearing endorsement from competent authority of BHEL.
2. Subcontractor to also submit monthly reports of T&Ps deployed and validity test certificates to BHEL safety Officer as per the format/procedure of BHEL.
3. Tagging and punching in all lifting tool is compulsory with SWL, sr. no. and due date.
4. All T&Ps shall be inspected by authorized Third Party agency as per applicable frequency. BHEL shall be kept informed of any such scheduled inspection
5. All T&Ps shall be internally inspected in each quarter and colour coded as below.

13.2.6.1 T&P Color Coding Procedure:

Inspections and tests shall be documented by means of color coding which shall verify that inspections or testing are current and that all receptacles, portable Power tools, Lifting Tools & Tackles have been inspected and tested as required. The color codes used on the project shall be:

GREEN	BLUE	YELLOW	RED
January February March	April May June	July August September	October November December

Table. 13.2.6.1 T&P Color Coding Procedure

- i. The cycle of colors shall be Quarterly as a minimum or as decided by BHEL. The color code tape / Sticker shall be clearly visible to designate the period for which the inspections and tests were conducted.

- ii. Following the initial inspection, the equipment must be color-coded quarterly as per color-coding instructions that will be issued by the subcontractor.
- iii. Fire extinguisher with the current month color-coding inspection sticker must be provided and secured in the platform.
- iv. All slings shall be regularly inspected in accordance with the requirement of the project for frequent and periodic inspections and discard immediately if they fail to meet the minimum requirements of the project.
- v. The Subcontractor's Safety Officer shall ensure that all PPE is inspected prior to its issue. He is to ensure all subcontractor personnel are using safe and proper PPE equipment. Regular inspections on the PPE shall be carried out and personnel not adhering to those inspections shall be removed immediately from the site.
- vi. A five (10) day interval period shall be given into each monthly color code change. During this five (10) day period either color shall be acceptable.

13.2.7 CHEMICAL HANDLING

- 1. Displaying safe handling procedures & MSDS for all chemicals such as lube oil, acid, alkali, sealing compounds etc, at work place.
- 2. Where it is necessary to provide and/or store petroleum products or petroleum mixture & explosives, the subcontractor shall be responsible for carrying out such provision / storage in accordance with the rules & regulations laid down in the relevant petroleum act, explosive act and petroleum and carbide of calcium manual, published by the chief inspector of explosives of India. All such storage shall have prior approval if necessary from the chief inspector of explosives or any other statutory authority. The subcontractor shall be responsible for obtaining the same.
- 3. The used containers of chemicals shall be segregated and disposed off suitably
- 4. In case the used containers need to be re-used, all traces of the chemical to be removed by thorough cleaning with detergents etc. under trained supervision

13.2.8 ELECTRICAL SAFETY

- 1. Only electricians licensed by appropriate statutory authority shall be employed by the subcontractor to carry out all types of electrical works. The subcontractor shall maintain adequate number of qualified electricians to maintain his temporary electrical installations.
- 2. Power supply to all equipment at site to be routed through MCBs of appropriate rating. A 'Power Supply Distribution Plan' shall be prepared and submitted to BHEL Engineer for approval

3. All power supplies through cables shall be underground or overhead with height > 3mtrs.
4. All distribution boxes shall be locked and the key controlled by site management of concerned subcontractor.
5. All individual equipment & tools at site shall be powered through Earth Leakage Circuit Breakers of 30 mA sensitivity.
6. These MCBs and ELCBs shall be regularly tested as per Clause 14
7. All fuses and fuse wires shall be of standard size and rating.
8. All electrical appliances used in the work shall be in good working condition and shall be properly double earthed other than armour earthing.
9. All extension boards shall have separate switches for all sockets / connections
10. All portable electric tools used by the subcontractor shall have safe plugging system to source of power and be appropriately earthed.
11. Providing adequate no. of 24 V sources and ensure that no hand lamps are operating at voltage level above 24 Volts especially in confined spaces like inside water boxes, turbine casings, condensers etc.
12. Electrical appliance shall have proper earthing and for appliances equal to & more than 415V shall have two separate earthing (as per IS-3043-1987)
13. Details of earth resource and their test date to be given to BHEL safety officer as per the prescribed formats of BHEL
14. The subcontractor shall use only properly insulated and armoured cables and conform to the requirement of Indian Electricity Act and Rules for all wiring, electrical applications at site.
15. BHEL reserves the right to replace any unsafe electrical installations, wiring, cabling etc. at the risk & cost of the subcontractor.
16. No maintenance work shall be carried out on live equipment
17. Adequate precautions shall be taken to prevent danger for electrical equipment. No materials on any of the sites of work shall be so stacked or placed as to cause danger or inconvenience to any person or the public
18. The subcontractor shall carefully follow the safety requirement of BHEL/ the purchaser with the regard to voltages used in critical areas.
19. Wiring and Branch Circuits Must be protected by a proper amperage over-current device such as a HRC fuse or circuit breaker. Such installations must be located so as to prevent physical damage to the wire conductors & panels.

20. Portable Electric Lights

- a. Portable electric lights used in wet or potentially wet locations must be either low voltage type (24 volts or less) or protected by a GFI (ground fault interrupter).
- b. They must be visually checked before each use and periodically while in use to assure their original integrity is maintained.
- c. Cords with cuts, breaks, deep abrasions, etc. shall be taken out of service immediately.
- d. Repairs to extension cords shall only be performed by qualified/ licensed electricians.
- e. Must not be allowed to lie in wet or potentially wet areas.

21. Underground Cables:

- a. Every electric line or cable of unknown origin that is discovered or exposed during a digging, drilling, probing, or similar operation is to be considered as energized and life threatening.
 - b. The senior company employee on the site will ensure that all necessary safety precautions are taken in order to isolate the line from all workers and the public.
 - c. Such precautions may include halting the operation if appropriate.
 - d. The senior company employee on the site is to then contact the proper authorities to have the line identified and either confirmed to be abandoned and/or made safe for continuing the work.
 - e. Any and all underground lines that are discovered or become severed must be considered energized on both sides, and be treated accordingly.
22. In general, equipment or machinery being moved or transported must maintain minimum clearances of 25 ft. to all power lines.
 23. TAG IN/ TAG OUT must be in force in Switch Room and all Distribution Boxes for live power line. The authorized person's name and contact no shall be displayed
 24. Ensure "double insulated" three - core cables and three pin connectors are used and are properly ground "all insulated" types, all electrical tools and appliances must be manufactured for industrial use.
 25. All connections shall be electrically and mechanically sound and properly insulated. Taped joints are not permitted. Connections to socket outlets must be made with proper plugs.
 26. Splices in electrical cords are not permitted. Repairs must be made at the socket connection and retain the same mechanical and dielectric condition of the original connection.
 27. Damaged or defective electric tools, equipment and extension cords, etc. must not be used and shall be tagged out of service, removed from the work area and taken back to stores.
 28. Only licensed electricians are authorized to repair and work on electrical equipment. Tampering with electric tools or equipment by others could result in termination.
 29. Temporary electric cabling should be elevated 2.2 meters above the floor/ground or covered for protection. It must be kept clear of walkways and other locations where it may be exposed to damage or create a tripping hazard.
 30. Energized wiring in junction boxes, circuit breaker panels and similar places must be covered and locked at all times.
 31. Areas with live high voltage wires or terminals must be barricaded against entry and warning signs posted Danger – High Voltage and Authorized Personnel Only.
 32. Personnel should never work on energized equipment, de-energizing (lockout/tag out) the equipment is always the first requirement.
 33. The lockout and tag out procedure will be used when testing or working on, or around, energized installation.
 34. Working around energized equipment should never be done alone. A second electrician must always be available for assistance.

35. If lockout/tag out of the work is infeasible (must be demonstrated), work on energized electrical circuits must be approved by the Site In-charge. All safety precautions necessary must be taken, PPE use must be evaluated per the exposure and used, i.e high/low voltage gloves, insulated shoes, overcoats/aprons, face shields, and other protective equipment like insulated tools, blankets, mats, etc. must be used.
36. The welding machines earth leads shall be properly fixed without loose contacts. The earth cable only has to be used. No steel members shall be used as earth leads.
37. Electrical crews must be qualified for the equipment and tools they work on, including being trained in Cardio-Pulmonary Resuscitation (CPR) methods and First Aid for rendering help in the event of electric shock.

38. Qualified Persons for Electrical Works

One who is trained and wiremen licensed to Govt of State and familiar with the construction, operation and safety hazards of the equipment upon which they are permitted to work.

- i. Qualified persons are intended to be only those who are well acquainted/experienced with and thoroughly conversant in the electric equipment and electrical hazards involved with work being performed.
- ii. Only qualified persons may be permitted to work on or near exposed energized parts. Such persons are required to have been trained in three specific areas:
- iii. Qualified persons must be capable of working safely on energized circuits;
- iv. Must be familiar with the proper use of special precautionary techniques and procedures based on equipment and exposure; and
- v. Must be familiar with required personal protective equipment, insulating and shielding materials, and insulated tools.
- vi. Qualified persons are expected to be able to evaluate unknown situations and adjust their activities in such a way that only safe work practices are used. Such behavior is the responsibility of the qualified person.
- vii. It is possible and likely for an individual to be 'qualified' with regard to certain equipment in the work place, and unqualified on other equipment they must know their limitation and stop work if not qualified on what equipment they were to work on.
- viii. An employee who is undergoing on-the-job training, who, in the course of such training, has demonstrated an ability to perform duties safely at his or her level of training, and who is under the direct supervision of a qualified person is considered to be a qualified person for the performance of those duties. The process must be documented as proof.

13.2.9 USE OF HAND TOOLS AND POWER-OPERATED TOOLS

13.2.9.1 General Provisions

- a. All hands and power tools and similar equipment, shall be maintained in safe condition.
- b. When power operated tools are designed to accommodate guards, they shall be equipped
- c. with such guards, when in use;
- d. Belts, gears, shafts, pulleys, sprockets, spindles, drums, fly wheels, chains and other reciprocating, rotating or moving parts of the equipment shall be similarly guarded;
- e. Personnel using hand and power tools and exposed to the hazard of falling, flying, abrasive, and splashing objects, or exposed to harmful dusts, fumes, mists, vapors, or gases shall be

provided with the particular personal protective equipment necessary to protect them from the hazards;

- f. All hand-held powered platen sanders, grinders, grinders with wheels of 5 cm or less, routers, planers, laminate trimmers, nibblers, shears, scroll saws and jigsaws with blade shanks of 0.5 cm wide or less shall be equipped with only a positive on-off control.
- g. All hand-held powered drills, tappers, fastener drivers, horizontal, vertical or angle grinders with wheels greater than 5 cm in diameter, disc sanders, belt sanders, reciprocating saws, saber saws and other operating powered tools shall be equipped with a momentary contact on control provided that turnoff can be accomplished by a single motion of the same finger or fingers that turn it on.

13.2.9.2 Hand Tools

- a. The subcontractor shall not issue or permit the use of unsafe hand tools;
- b. Wrenches including adjustable pipe end and socket wrenches shall not be used when saws are sprung to the point that slippage occurs;
- c. Impact tools such as drift pins, wedges and chisels shall be kept free of mushroomed heads;
- d. The wooden handles of tools shall be kept free of splinters or cracks and shall be kept tight on the tools.

13.2.9.3 Power Operated Tools

- a. Electric power operated tools shall be either of the approved double-insulated type or shall be grounded;
- b. The use of electric cords for hoisting or lowering loads shall not be permitted;
- c. Pneumatic power tools shall be secured to the hose or whip by some positive means to prevent the tool from becoming incidentally disconnected;
- d. Safety clips or retainers shall be securely installed or maintained on pneumatic impact (percussion) tools to prevent attachments from being incidentally expelled;
- e. All pneumatically riveting machine staplers and other similar equipment provided with automatic fastener feed, which operate at more than 7 kg/cm² pressure at the tool a safety device on the muzzle to prevent the tool from ejecting the fasteners unless the muzzle is in contact with the work surface;
- f. Compressed air shall not be used for cleaning purposes except when the pressure is reduced to less than 2 kg/cm² and that too with effective chip guarding. The 2 kg/cm² pressure requirement does not apply to concrete form, mill scale and similar cleaning purposes;
- g. The manufacturer's safe operating for hoses, pipes, valves, filters and other fittings shall not be exceeded;
- h. Only personnel who has been trained in the operation of the particular tool shall be allowed to operate power-actuated tools;
- i. The tool shall be tested each day before loading to see that the safety devices are in proper working condition. The method of testing shall be accordance with the manufacturer's

recommended procedure;

- j. Any tool found not in proper working order, or that which develops a defect during use, shall be immediately removed from service and not used until properly repaired;
- k. Tools shall not be loaded until just prior to the intended firing time. Neither loaded nor empty tools are to be pointed at any other person. Hands shall be kept clear of the open barrel end;
- l. Loaded tools shall not be left unattended;
- m. Fasteners shall not be driven into very hard or brittle materials including, but not limited to, cast iron, glazed tiles, surface hardened steel, glass block, live rock, face brick or hollow tiles;
- n. Driving into materials that can be easily penetrated shall be avoided unless backed by a
- o. substance that will prevent the pin or fastener from passing completely through and creating a flying missile hazard on the other side;
- p. No fastener shall be driven into a palled area caused by an unsatisfactory fastening;
- q. Only non-sparking tools shall be used in an explosive or flammable atmosphere;
- r. All tools shall be used with the correct shield, guard or attachment as recommended by the manufacturer.

13.2.9.4 Abrasive Wheels and Tools

- a. All grinding wheel must be ISO certified only.
- b. All grinding machines shall be supplied with sufficient power to maintain the spindle speed at safe levels under all conditions of normal operation;
- c. Grinding machines shall be equipped with suitable safety guards;
- d. The maximum angular exposure of the grinding wheel periphery and sides shall not be more than 900, except that when the work requires contact with the wheel below the horizontal plane of the spindle, the angular exposure shall not exceed 1200. In either case, the exposure shall begin not more than 8.650 above the horizontal plane of the spindle. Safety guards shall be strong enough to withstand the bursting of the wheel;
- e. Floor and bench-mounted grinders shall be work-rests, which shall be rigidly supported and readily adjustable. Such work-rests shall be kept at a distance not to exceed 5 mm from the surface of the wheel;
- f. Cup type wheels used for external grinding shall be protected by either revolving cup guard or a band type guard;
- g. When safety guards are required, they shall be mounted as to maintain proper alignment with the wheel and the guard and the guard and its fastening shall be adequate strength to retain the fragments of the wheel in case of incidental breakage. The maximum angular exposure of the grinding wheel periphery and sides shall not exceed 1800;
- h. Portable abrasive wheel used for internal grinding shall be provided with suitable safety flanges;
- i. When safety flanges are required, they shall be used only with wheels designed to fit the flanges. Only safety flanges, of a type and design and properly assembled so as to ensure that the pieces of the wheel will be retained in case of incidental breakage, shall be used;
- j. All abrasive wheels shall be closely inspected and ring tested before mounting to ensure that

they are free from cracks or defects;

- k. Grinding wheels shall fit freely on the spindle and shall not be forced on. The spindle nut shall be tightened only enough to hold the wheel in place;
- l. All employees using abrasive wheels shall be protected by suitable eye protection equipment.

13.2.9.5 Wood Working Tools

- a. All fixed power driven woodworking tools shall be provided with a disconnect switch that can either be locked or tagged in the off-position;
- b. The operating speed shall be attached or otherwise permanently marked on all circular saws over 0.5 m in diameter or operating at over 3000 peripheral rpm. Any saw so marked shall not be operated at a speed other than that marked on the blade. When a marked saw is re-tensioned for a different speed, the marking shall be corrected to show the new speed;
- c. Automatic feeding devices shall be installed on machines wherever the nature of the work will permit. Feeder attachments shall have the feed rolls or other moving parts covered or guarded so as to protect the operator from hazardous points;
- d. All portable power driven circular saws shall be equipped with guards above and below the base plate or shoe. The upper guard shall cover the saw to the depth of the teeth, except for the minimum arc required to permit the base to be tilted for bevel cuts. The lower guard shall cover the saw to the depth of the teeth, except for the minimum arc required to allow proper retraction and contact with the work. When the tool is withdrawn from the work, the lower guard shall automatically and instantly return to the covering position.

13.2.10 START UP, COMMISSIONING AND TESTING:

There are various activities involved prior to commissioning- the major ones are -Hydraulic Test, Steam Blowing, Transformers Charging, Boiler Light Up, Rolling and Synchronisation and Full loading of unit.

- a. These activities shall be personally supervised by the site executive along with the commissioning engineer.
- b. Appropriate Work Permits shall be taken as applicable
- c. The readiness of upstream and downstream system shall be ensured before taking up.
- d. These shall be handled strictly by the authorized persons only and the team shall be suitably briefed about the activity including hazards & risks involved and control plan by the concerned executive-in-charge before start.
- e. Entry of persons to the area of activity shall be suitably restricted and the emergency functions like Ambulance, first aid center and Fire station shall be intimated about the plan well in advance.
- f. Tag-in/ Tag-out shall be in place while charging transformer and whenever necessary.
- g. Electricians with valid wiremen license only shall be permitted to work on power lines.
- h. The area and the passage shall be adequately illuminated.

13.2.11 FIRE SAFETY

Numbers and types of Fire Extinguishers shall be ensured as follows:

Sl. No	Type of Fire Risk (Class of Fire)	Extinguishing Medium & Relevant Indian Standard		Scale of Equipment (Minimum recommended)
1.	CLASS 'A' Fires involving ordinary combustible materials like wood, paper, textiles, rubber etc. (Ordinary hazard or low fire load)	WATER Soda acid type, water type (gas pressure) and water type (constant air pressure) IS: 934 -1976; IS: 940 -1976; IS: 6234 -1971		For every 600 square meter floor area or part, one 9-litre capacity. Minimum 4 numbers per floor or room; should not be required to travel more than 15 meter to reach any extinguisher.
2.	CLASS 'A' (Extra hazard & high fire load)	-do		-do – (Also, consult local fire authority).
3.	CLASS 'A' (Special hazards)	-do	-do – Extra provision For every 100 square meter floor area or part, one 4.5 Kg. CO ₂ ; minimum 2 numbers per room; should not be required to travel more than 10 meter to reach any extinguisher.	
4.	CLASS 'B' (Fires in flammable liquids like oils, solvents, petroleum, products, varnishes, paints, etc. where blanketing effect is essential) (Storage and handling in small quantities)	FOAM / CARBON DIOXIDE / DRY CHEMICAL POWDER IS: 933 -1976; IS: 2878 1976; IS: 2171 1976; IS: 4308 -1982		For every 50 square meter floor area or part, 2 numbers 9 -liters foam or 5 kg dry powder; should not be required to travel more than 10 m in the area of storage to reach any extinguisher.
5.	CLASS 'B' (Bulk storage other than in tank form)	-do -		-do- (but minimum 3 numbers per room)
6.	CLASS 'C' (Fires involving gaseous substances under pressure where it is necessary to dilute the burning gas at a very fast rate with an inert gas or powder) (locations of storage and handling of gas cylinders)	CARBON DIOXIDE / DRY CHEM. POWDER. The best way to extinguish such fire is by stopping the flow of fuel gas to the fire. Container is kept cool with water spray. IS: 2878 1976; IS: 2171 -1976; IS: 4308 -1982		For every 100 square meter floor area or part; 2 numbers, 10 kg powder extinguisher or 6 kg CO ₂ ; minimum 3 nos. per room; should not be required to travel more than 10 meter to reach any extinguisher.
7.	CLASS 'D' Fires involving metals like magnesium, aluminum, zinc, potassium etc. where the burning metal is reactive to water and which require special extinguishing media or technique	SPECIAL DAY POWDER IS: 2171 -1976 IS: 4861 -1968		For every 50 square meter floor area or part, 2 nos. 5 kg special dry powder; minimum 3 nos. per room; should not be required to travel more than 10 meter to reach any extinguisher.
8.	MIXED OCCUPANCY (electrical); Generators; Transformers; etc.	CARBON DIOXIDE DRY POWDER, IS: 2878 -1976; IS: 2171 -1976		For every 100 square meter floor area or part one 10 kg CO ₂ . Minimum 2 numbers for every location should not be required to travel more than 10 meter to reach an extinguisher.

Note: Due to peculiarities of the power plant construction sites, there would be locations in the construction areas of Boiler, Turbine, Generator, Transformer, etc. where different types of fire risk (classes of fire) may co-exist. Special

care shall be taken while selecting and installing portable fire extinguishers for such locations so that all types of fire risk that may co-exist, are adequately covered. Similar special care shall be taken for storage areas.

1. All Electrical welding booths shall be equipped with appropriate Fire Extinguisher
2. Appropriate Fire Extinguishers shall be made within easy reach of all welding operations
3. Fire extinguishers shall be regularly tested and last checked date to be indicated on each.
4. Providing appropriate firefighting equipment at designated work place and nominate a fire officer/warden adequately trained for his job.
5. Subcontractor shall provide enough fire protecting equipment of the types and numbers at his office, stores, temporary structure in labour colony etc. Such fire protection equipment shall be easy and kept open at all times.
6. The fire extinguishers shall be properly refilled and kept ready which should be certified at periodic intervals. The date of changing should be marked on the Cylinders.
7. All other fire safety measures as laid down in the “codes for fire safety at construction site” issued by safety coordinator of BHEL shall be followed.
8. Non-compliance of the above requirement under fire protection shall in no way relieve the subcontractor of any of his responsibility and liabilities to fire incident occurring either to his materials or equipment or those of others.
9. Emergency contacts nos. must be displayed at prominent locations
10. Tarpaulin being inflammable should not be used (instead, only non-infusible covering materials shall be used) as protective cover while preheating, welding, stress relieving etc. at site.

13.2.12 HSE PREPAREDNESS FOR ADVERSE CLIMATES AND WEATHER

Subcontractor to remain updated on possible adverse weather conditions through reliable sources and all precautions taken accordingly.

13.2.12.1 SUMMER

1. The Working Time and Lunch Hour will be as per instruction of Statutory Authorities (no work between 11am to 3:30pm). However, in case temp comes down due to rain/cloudy weather work will continue as per normal routine.
2. During long lunch break, worker will be allowed to go back home for rest. Those who will like to stay back will avail at the facility of rest shed or other designed area.
3. They will be allowed to take small break during work as per their need.
4. Water sprinkling will be done on roads to reduce dust concentration.
5. Workers will be provided with adequate cool drinking water and Butter milk/Lemon water etc.
6. Adequate ORS stock will be made available at the work location in the First-Aid Box for use as needed and at First-aid Center for emergency need.
7. Fire prevention shall be on high alert, with removal of dry grass and bushes, etc, inside and outside the surrounding work areas. No smoking, and control of open flame/sparks shall be maintained and monitored.
8. Worker will be informed about the Do's and Don'ts to be followed during summer in the Pre Job Brief.

Do's & Don'ts

9. Drink plenty of cool water and other non-alcoholic fluid and keep body well hydrated.
10. Eat salt in food to replenish loss of salt through sweating.
11. Avoid over physical exercise.
12. Have adequate sleep at night.
13. Eat light and less spicy food
14. Avoid eating food which was cooked long time ago.
15. Nobody should use small water bodies such as pits, running rain water through crevices etc. for drinking and cleaning purpose as it may be unhygienic.

Emergency Handling

In case of emergency due to heat disorder:

16. Rescue the victim from workplace and place under shed.
17. If to be rescued from height, use stoke basket or rescue kit.
18. Inform Ambulance immediately.
19. If nearby any air conditioned room/shed is available, place him inside the room/shed.
20. Administer First aid by trained First aider for Heat Disorder
21. If conscious, give him ORS solution to drink.
22. If required send the victim hospital immediately.

13.2.12.2 Monsoon**A. Height Work & Structural Safety:**

1. Ensure that all height work platforms are barricaded and avoid any highly hazardous
2. height work.
3. Ensure that all personnel have good quality and intact safety shoes
4. Stop all dangerous height work during rain
5. Explain Do's and Don'ts to workers during Tool Box Meetings
6. Ensure that there are no weak structures, boards etc. that can fall during high winds
7. Do not allow any loose material (e.g. GI sheet, Ply board, empty cement bag, aluminum foil, foam sheets etc.) on roof sheds or top of structures.
8. Do not permit any one to ride up or come down scaffolds frame work during heavy wind or rain.
9. Provide "anchor" of adequate strength to scaffolds and other high-rise structures.
10. All rest sheds and GI sheds will be anchored into the round and wall and roof panels will be secured with J hook to prevent shed from blowing over or parts/pieces becoming airborne. Proper earthing per IS standard is also to be installed.
11. Do not go alone nor permit anyone to stay at tower-tops, roof-tops, high structures or on electrical poles during the course of stormy weather or heavy rain.

B. Electrical:

1. All electrical connections / loads have to be routed through ELCB / RCCB (residual current circuit breaker) whose rating should be 30mA.
2. RCCB operational checks need to be done DAILY / WEEKLY during monsoon season.
3. Avoid joints on power cables which need to be laid over-head or under-ground, better not to have any joint at all. In case joints become essential, such cables must be housed rigidly and insulation must be provided as per approved standard. The joint shall be suitable for outdoor use.
4. All electrical distribution board shall be properly covered at top and sides to protect from rain water. Extension boards shall be protected from rain water.
5. Ensure proper "earthing" for each and every electrical appliance.
6. Double earthing need to be provided for 3-phase power supply and for voltage more than 220V.
7. Provide lightening arrestors at the top of Boiler 3 and boiler 4 and rest sheds which are not covered by existing lightening arrestor of other installation.

C. Others:

1. Maintain smooth flow on open drains. i.e. no obstruction or blockade shall be made on storm water drains. If required, make temporary drains.
2. Arrange back-filling of excavated pits on war-footing basis.
3. Arrange bringing down booms of all cranes, hydra machines during stormy weather (wind speed 40-50 kmph)
4. Confirm that all gantry cranes are effectively choked to prevent rolling and toppling.
5. Do not forget to deep ready a dew battery operated lights at site-offices during rainy season.
6. Avoid using wet damp clothes.
7. Barricade excavated zone filled with water.
8. Engage diesel operated water pump to dewater work area. For electrically operated water pump, the starter shall be protected from rain water. All rotating parts shall be guarded. Ensure availability of sufficient water pumps.

D. Health and hygiene:

1. Monsoon reduces the immunity of our body and makes us vulnerable to many diseases which are commonly associated with this season. It is time for us to keep our body challenging against disease by boosting our immunity and taking safety measures against these diseases.

2. The diseases associated with monsoon are Malaria, Jaundice, Gastro-intestinal infections, like typhoid, cholera etc. apart from these viral infections like cold and cough also make their presence felt. Majority of above said diseases are on account of:
3. Puddle of water formed due to rain become breeding grounds for mosquitoes which spread disease like, malaria and dengue fever. As a precautionary measure against mosquito-bite disease one can use mosquito net around the bed which is better choice to mosquito repellants like mats and coils.
4. Pollution of drinking water during monsoon is very common. It is very necessary to drink clean and pure water when water-borne monsoon diseases like diarrhea and gastro-intestinal infections threaten us.
5. Walking in dirty water during rainy season leads to numerous fungal infection which affect toes and nails. Diabetic patients have to take special care about their feet. Keeping feet always dry and clean is very necessary. Avoid walking in dirty water. Keep shoes socks and raincoats dry and clean.

E. Workmen will be made aware of following Do's and Don'ts:

1. Do not sleep in daytime.
2. Avoid over physical exertion.
3. During lightning and thunder storm, do not take shelter under tree. Take shelter inside rest shed or store room.
4. Wash vegetables with clean water and steam them well to kill germs.
5. Avoid eating un-cooked foods and salads should be washed properly before consumption.
6. Drink plenty of water and keep body well-hydrated.
7. Always keep the surrounding area dry and clean. Don't allow to get water accumulated around.
8. Keep body warm as viruses attack immediately when body temperature goes down.
9. Do not enter air conditioned room with wet hair and damp cloths.
10. Dry your feet and webs with soft dry cloth whenever they are wet.
11. Eat light and less spicy food.
12. Avoid eating food which was cooked long time ago.
13. Eat salt in food to replenish loss of salt through sweating.

13.2.12.3 Emergency Weather Conditions

A. Cyclone/Severe thunder storm

In the event of Cyclone/Severe thunder storm, alert will be issued by subcontractor on notification received by Govt. authorities/Metrological departments Customer or BHEL.

The actions required during cyclone/rough weather:

1. Check and advise subcontractors to cleanup work area. Pick up all loose and unused material of respective supervisor's area.
2. Tie to secure all gas cylinders to avoid displacement and unsafe conditions which could be due to wind pressure.

3. Secure portable electricity generating sets and other equipment, pumps, hoses etc.
4. Make preparation for removal of water logging.
5. Take review of work activity and make preparation for removal of equipment and material from vulnerable areas.
6. Isolate/turn off all electrical power from the main panel/switches. Secure and anchor panels properly.
7. Recheck anchorage/tie of all temporary structures/sheds, tall objects, cranes, rigs, scaffolds etc. to avoid toppling due to wind force.
8. Cranes boom shall be secured, either locked or lowered the booms as reasonably and practicably possible and rigs to safe position for the safety point of view.
9. Group up all trash barrels, wooden pallets, forms; wooden decks etc. and anchor properly.
10. Welding machines, air compressors and such equipment are to be grouped together and secured to the stable objects. Welding leads, electrical cables, hoses are to be rolled up and secured properly.
11. Set on site vehicles on high ground in the site area with brakes set firmly.
12. Anchor all tanks, vessels, gas cylinders that may be moved by high wind and water.
13. Evacuate job site.

Personnel Evacuation:

14. Personnel Evacuation will be required if predicted wind speed and storm surge heights are beyond acceptable limits as per the instructions from Govt. Authorities/ Metrological departments or Customer.
15. Once the warning is received for personnel evacuation, an emergency response team shall be formed. The team will work with local authorities and other agencies formed/deployed to evacuate and transport all personnel involved in the project to the cyclone shelter.
16. Cyclone may be followed by the calm "EYE", be aware of it. If the wind suddenly drops, don't assume the cyclone is over. Violent wind may resume from the opposite side direction. Wait for the official "All clear Signal".
17. After the cyclone, do not go outside until officially communicated about safe situation outside. Use recommended routes for returning. Do not panic or rush while returning.
18. Checking of gas leaks and well being of electrical appliances is essential before leaving the site.
19. Follow local communications for official warning and advice. The construction Manager shall also obtain updates from customer/metrological departments and communicate to the personnel on project site.

13.2.12.4 Preparedness for Other Adverse Climates and Weather Conditions

All Preventive and Precautionary measures to ensure Health & Safety of workers in all possible adverse weather conditions based on the analysis of the local area conditions to be taken by the subcontractor

13.3 ENVIRONMENTAL CONTROL

1. Environment protection has always been given prime importance by BHEL. Environmental

damage is a major concern of the principal subcontractor and every effort shall be made, to have effective control measures in place to avoid pollution of Air, Water and Land and associated life.

2. Subcontractor shall list out all applicable environmental aspects and impacts, and ensure control measures to manage the same.
3. Chlorofluorocarbons such as carbon tetrachloride and trichloroethylene shall not be used.
4. Waste disposal shall be done in accordance with the guidelines laid down in the project specification.
5. Any chemical including solvents and paints, required for construction shall be stored in designated bonded areas around the site as per MSDS.
6. In the event of any spillage, the principle is to recover as much material as possible before it enters drainage system and to take all possible action to prevent spilled materials from running off the site. Subcontractor shall use appropriate MSDS for clean-up technique. Subcontractor shall be responsible for the cleanliness of their own areas.
7. Subcontractor shall ensure that noise levels generated by plant or machinery are as low as reasonably practicable. Where the subcontractor anticipates the generation of excessive noise levels from his operations the subcontractor shall inform BHEL accordingly so that reasonable & practicable precautions can be taken to protect other persons who may be affected.
8. It is imperative on the part of the subcontractor to join and effectively contribute to environmental protection measures such as tree plantation and towards social causes and maintaining good relations with local populace.
9. The subcontractor shall carry out periodic air and water quality check and illumination level checking in respective area of work place and take suitable control measure to maintain the same as per applicable laws / standards

13.3.1 WASTE MANAGEMENT

1. Subcontractor shall take suitable measures for waste management and fulfilling requirements of environment related laws/legislation as a part of normal construction activities.
2. Compliance with the legal requirements on storage/ disposal of paint drums (including the empty ones), Lubricant containers, Chemical Containers, and transportation and storage of hazardous chemicals will be strictly maintained.
3. Details of E-Waste, Hazardous Waste, shall be submitted to BHEL as per Format No. HSEP: 14-F18 and HSEP: 14-F19 respectively

13.3.1.1 BINS AT WORK PLACE

1. Sufficient rubbish bins shall be provided close to workplaces.
2. Bins should be painted yellow and numbered.
3. Sufficient nos. of drip trays shall be provided to collect oil and grease.
4. Sufficient qty. of broomsticks with handle shall be provided.
5. Adequate strength of employees should be deployed to ensure daily monitoring and service for waste management.

13.3.1.2 STORAGE AND COLLECTION

1. Different types of rubbish/waste should be collected and stored separately.

2. Paper, oily rags, smoking material, flammable, metal pieces should be collected in separate bins with close fitting lids.
3. Rubbish should not be left or allowed to accumulate on construction and other work places.
4. Do not burn construction rubbish near working site.

13.3.1.3 SEGREGATION

1. Earmark the scrap area for different types of waste.
2. Store wastes away from building.
3. Oil spill absorbed by non-combustible absorbent should be kept in separate bin.
4. Clinical and first aid waste stored and incinerated separately.

13.3.1.4 DISPOSAL

1. Sufficient containers and scrap disposal area should be allocated.
2. All scrap bin and containers should be conveniently located.
3. Provide self-closing containers for flammable/spontaneously combustible material.
4. Keep drainage channels free from choking.
5. Make schedule for collection and disposal of waste.

13.3.1.5 WARNING AND SIGNS

1. Appropriate signage to be displayed at scrap storage area
2. No toxic, corrosive or flammable substance to be discarded into public sewage system.
3. Waste disposal shall be in accordance with best practice.
4. Comply with all the requirements of Pollution Control Board (PCB) for storage and disposal of hazardous waste.

13.4 HOUSEKEEPING

1. Keeping the work area clean/ free from debris, removing unused scaffoldings, scraps, insulation/ sheeting wastage /cut pieces temporary structures, packing woods etc. will be in the scope of the subcontractor.
2. Such cleaning has to be done by subcontractor within quoted rate, on daily basis by dedicated identified groups equipped with all require PPEs and training. The details of housekeeping group shall be provided to BHEL.
3. If such activity is not carried out by subcontractor / BHEL is not satisfied, then BHEL may get it done by other agency and actual cost along with BHEL overheads will be deducted from subcontractor's bill. Such decisions of BHEL shall be binding on the subcontractor.
4. Pests, such as beehives etc. shall be periodically removed in a humane fashion
- 5. Following are to be taken care of on daily basis.**
 - i. All surplus earth and debris are removed/disposed of from the working areas to identified locations.
 - ii. Unused/Surplus cables, steel items and steel scrap lying scattered at different places /elevation within the working areas are removed to identify locations.
 - iii. All wooden scrap, empty wooden cable drums and other combustible packing materials, shall

be removed from workplace to identified locations. Sufficient waste bins shall be provided at different work places for easy collection of scrap/waste. Scrap chute shall be installed to remove scrap from high locations

- iv. Access and egress (stair case, gangways, ladders etc.) path should be free from all scrap and other hindrances.
- v. Workmen shall be educated through tool box talk about the importance of housekeeping and encourage not to litter.
- vi. Labor camp area shall be kept clear and materials like pipes, steel, sand, concrete, chips and bricks, etc. shall not be allowed in the camp to obstruct free movement of men and machineries.
- vii. Fabricated steel structures, pipes & piping materials shall be stacked properly.
- viii. No parking of trucks/trolleys, cranes and trailers etc. shall be allowed in the camp, which may obstruct the traffic movement as well as below LT/HT power line.
- ix. Utmost care shall be taken to ensure over all cleanliness and proper upkeep of the working areas

13.5 TRAFFIC MANAGEMENT

13.5.1 SAFE WORKPLACE TRANSPORT SYSTEM

- 1. Traffic routes in a work place shall be suitable for the persons or vehicles using them.
- 2. Traffic routes for pedestrians and vehicles shall be clearly demarcated and indicated
- 3. Traffic routes shall never intersect the area of work and shall not endanger the site personnel
- 4. For internal traffic, lines marked on roads / access routes and between buildings shall clearly indicate where vehicles are to pass.
- 5. Temporary obstacles shall be brought to the attention of drivers by warning signs / hazard cones.
- 6. Power cables shall be maintained at a minimum height above ground as specified in Indian Electricity Act & Rules.
- 7. Sensible speed limits shall set and clearly displayed. Painted Speed ramps preceded by a warning signs or marker are necessary for stretches of roads exceeding 50 meters.
- 8. The traffic route should be wide enough to allow vehicles to pass and re-pass oncoming or parked traffic and it may be advisable to introduce on-way system or parking restrictions.
- 9. Safest route shall be provided between places where vehicles have to call or deliver.
- 10. Avoid vulnerable areas/items such as fuel or chemicals tanks or pipes, open or unprotected edges and structures likely to collapse
- 11. Safe areas shall be provided for loading and unloading of material. Loading / Unloading Permit shall be taken from BHEL prior to any significant loading / unloading activity
- 12. Avoid sharp or blind bends. If this is not possible hazards should be indicated e.g. blind corner.
- 13. Ensure road crossings are minimum and clearly signed.
- 14. Entrance and gateways shall be wide enough to accommodate a second vehicle without causing obstruction.
- 15. Forklift trucks shall not pass over road hump unless of a type capable of doing so.

16. Overhead electric cable, pipes containing flammable hazardous chemical shall be shielded by using goal posts height gauge posts or barriers.
17. The height of Power cables above areas of movement shall conform to Indian Electricity Rules
18. Road traffic signs shall be provided on prominent locations for prevention of accidents and hazards and for quick guidance and warning to employees and public.
19. Safety signs shall be displayed as per the project working requirement and guideline of the state in which project is done.
20. Vehicles hired or used shall not be parked within the 15m radius of any working area. Any vehicle, that is required to be at the immediate/near the vicinity, shall be approved by the person in-charge of the site.

13.5.2 TRAFFIC ROUTE FOR PEDESTRIANS

1. Where traffic routes are used by both pedestrians and vehicles road shall be wide enough to allow vehicles and pedestrians safely.
2. Separate routes shall be provided for pedestrians to keep them away from vehicles. Provide suitable barriers/guard at entrances/exit and the corners of buildings.
3. Where pedestrian and vehicle routes cross, appropriate crossing shall be provided.
4. Where crowd is likely to use roadway e.g. at the end of shift, stop vehicles from using them at such times.
5. Provide high visibility clothing for people permitted in delivery area.

13.5.3 WORK VEHICLES

Work vehicles shall be as safe stable efficient and roadworthy as private vehicles on public roads. Subcontractors shall ensure that drivers are suitably trained and have valid license and experience for the designated class of vehicle. All vehicle e.g. heavy motor vehicle forklift trucks dump trucks mobile cranes shall ensure that the work equipment conforms to the following:

1. A high level of stability.
2. A safe means of access/egress.
3. Suitable and effective service and parking brakes.
4. Windscreens with wipers and external mirrors giving optimum all round visibility.
5. Provision of horn, vehicle lights, reflectors, reversing lights, reversing alarms.
6. Provision of seat belts.
7. Guards on dangerous parts.
8. Driver protection - to prevent injury from overturning and from falling objects/materials.
9. Driver protection from adverse weather.
10. No vehicle shall be parked below HT/LT power lines in conformance to Indian Electricity Act & Rules.
11. Valid Pollution Under Control certification for all vehicles

13.5.4 DAILY CHECKS BY DRIVER

There should also be daily safety checks containing below mentioned points by the driver before the vehicle is used. Subcontractors should ensure that drivers carry out these checks as a minimum.

Brakes	Mirrors	Warning signals
Tires	Windscreen waters	Specific safety system i.e. control interlocks
Steering	Wipers	

13.5.5 TRANSPORTATION OF PERSONNEL AND MATERIALS BY VEHICLES

1. All drivers shall hold a valid driving License for the class of vehicle to be driven and be registered as an authorized BHEL driver with the Administration Department.
2. Securing of the load shall be by established and approved methods, i.e. chains with patented tightening equipment for steel/heavy loads. Sharp corners on loads shall be avoided when employing ropes for securing.
3. All overhangs shall be made clearly visible and restricted to acceptable limits
4. Load shall be checked before moving off and after traveling a suitable distance.
5. On no account is construction site to be blocked by parked vehicles Drivers of vehicles shall only stop or park in the areas designate by the stringing foreman.
6. Warning signs shall be displayed during transportation of material.
7. All vehicles used by Subcontractor shall be in worthy condition and in conformance to the Land Transport requirement

13.5.6 MAINTENANCE

All Vehicles used for transportation of man and material shall undergo scheduled inspections on frequent intervals to secure safe operation. Such inspections shall be conducted in particular for steering, brakes, lights, horn, doors etc. Site management shall ensure that work equipment is maintained in an efficient, working order and in good repair. Inspections and services carried out at regular intervals of time and or mileage. No maintenance shall be carried below HT/LT power lines.

13.6 EMERGENCY PREPAREDNESS AND RESPONSE

1. Subcontractor shall develop Emergency preparedness and response capability and Emergency Response Team as per [HSEP06: HSE Procedure for Emergency Preparedness and Response](#)
2. Availability of adequate number of first aiders and fire warden shall be ensured
3. All the subcontractor's supervisory personnel and sufficient number of workers shall be trained for fire protection systems. Enough number of such trained personnel must be available during the tenure of contract. Subcontractor should nominate his supervisor to coordinate and implement the safety measures and communicate the same to BHEL.
4. Assembly point shall be earmarked and access to the same from different location shall be shown
5. Fire exit shall be identified and pathway shall be clear for emergency escape.
6. Appropriate type and number of fire extinguisher shall be deployed as per Clause No. 13.2.11 and validity shall be ensured periodically through inspection
7. Adequate number of first aid boxes shall be strategically placed at different work places to cater

- to all emergency needs. Holder of the first aid box shall be identified on the box itself who will have the responsibility to maintain the same.
8. First aid center shall be developed at site with trained medical personnel and ambulance
 9. Emergency contact numbers of the site shall be displayed at prominent locations.
 10. Tie up with fire brigade shall be done in case customer is not having fire station.
 11. Tie up with hospital shall be ensured in order to ensure the availability of following services to victims quickly without wasting precious time:
 - a. Intensive Care Unit with Ventilator and other necessary life support systems
 - b. Facility of specialized Orthopedic Surgery – in case of fracture / amputation
 - c. Facility of specialized brain / neuro surgery – in case of head trauma
 - d. Facility of specialized burn unit / ward – in case of Fire / burn injury
 - e. and other facilities as per requirement at site location

In case tie up with multiple hospitals is required to cover all possible accidents, same shall be done. The list of facilities to be regularly checked and updated.
 12. A detailed emergency services (Fire / Medical etc.) tie up plan shall be submitted to BHEL in monthly report Format No. HSEP:14-F05
 13. Mock drill shall be conducted on different emergencies periodically to find out gaps in emergency preparedness and taking necessary corrective action

14 HSE INSPECTION

Inspection on HSE for different activities being carried out at site shall be done to ensure compliance to HSEMS requirements. The subcontractor shall maintain necessary safety equipment as applicable, to enable inspection personnel/agency perform Inspection. If any test equipment is found not complying with proper safety requirements then the Inspection Agency may withhold inspection, till such time the desired safety requirements are met.

The requirements of respective work permits are to be ensured by respective supervisors, safety personnel and area in-charges. In addition, the formats & checklists as per Clause 21 of this document provided by BHEL shall be used for inspection by Safety personnel (as a minimum), and records of inspection to be maintained. BHEL shall reserve the right to modify any Format in this document or introduce additional checklists / formats to ensure regular inspection of all equipment as per requirement.

14.1 DAILY HSE CHECKS

Both the Site Supervisors and HSE Supervisors are to conduct daily site Safety inspection around work activities and premises to ensure that work methods and the sites are maintained to an acceptable standard. The following are to form the common subjects of a daily safety inspection:

1. Height Work:

- a. Safe, barricaded platform
- b. PPEs
- c. Proper method
- d. Awareness
2. Personal Safety wears & gear compliance.
3. Complying with site safety rules and permit-to-work (PTW).
4. Positions and postures of workers.
5. Use of tools and equipment etc. by the workers.
6. The inspection shall be carried out just when work starts in beginning of the day, during peak activities period of the day and just before the day's work ends.

14.2 INSPECTION OF HEIGHT WORKING

1. Any kind of height work (above 2 meters) shall not be carried out without active physical supervision by concerned supervisor or safety personnel. All non-conformances related to height work shall be handled on priority and closed immediately after halting the work.
2. A roster of personnel deployed for inspection of height work and other critical activities shall be prepared and submitted to BHEL in monthly report Format No. HSEP:14-F05, in order to ensure effective supervision at all times
3. Inspection on height working shall be conducted **daily** by supervisors before start of work to ensure safe working condition including provision of:

a. Fall arrestor	d. Fencing and barricading	g. Proper scaffolding with valid
b. Lifelines	e. Warning signage	Tags, access and egress.
c. Safety nets	f. Covering of opening	h. Illumination

4. Inspection on height working shall be conducted once in a week by HSE officer as per
5. Format no. HSEP: 14-F10.
6. Medical fitness, including vertigo test of height worker shall be ensured.
7. Height working shall not be allowed during adverse weather.

14.3 INSPECTION OF PPE

PPEs shall be inspected by HSE officer at random once in a week as per Format no. HSEP: 14-F06 for compliance to standard and provisions and any adverse observation shall be recorded in the PPE register.

14.4 INSPECTION OF T&Ps

1. All T& Ps being used at site shall be inspected by HSE officer once in a month as per specific Formats in this document, or (if not available) general Format no. HSEP: 14-F07 for its healthiness and maintenance.
2. A master list of T&Ps and validity of their inspection certificates shall be maintained by each agency and details shall be submitted to BHEL in monthly format no. HSEP:14-F05.
3. The T&Ps which require third party inspection shall be checked for its validity during inspection.

The third party test certificate should be accompanied with a copy of the concerned competent person's valid qualification record. BHEL shall be given advance intimation of Third Party Inspection. BHEL shall associate with Inspection as per discretion.

14.5 INSPECTION OF CRANES AND WINCHES

1. Cranes and winches shall be inspected by the operator through a daily checklist for its safe condition (as provided by the equipment manufacturer) before first use of the day.
2. Cranes and Winches shall be inspected by HSE officer once in a month as per Format no. HSEP: 14-F08 & F09 for healthiness, maintenance and validity of third party inspection.
3. The date of third party inspection and next due date shall be painted on cranes and winches.
4. The operators/drivers shall be authorized by sub-contractor based on their competency and experience and shall carry the I-card.
5. The operator should be above 18 years of age and should be in possession of driving license of HMV man & goods), vision test certificate and should have minimum qualification so that he can read the instructions and check list.

14.6 INSPECTION ON WELDING AND GAS CUTTING OPERATION

1. Supervisor shall ensure that no flammable items are available in near vicinity during welding and gas cutting activity.
2. Gas cylinders shall be kept upright.
3. Use of Flash back arrestor shall be ensured at both ends.
4. Inspection during welding and gas cutting operations shall be carried out by HSE officer once a month as per Format no. HSEP: 14-F11.
5. Use of fire blanket to be ensured to avoid falling of splatters during welding or gas cutting operation at height.
6. Availability of fire extinguisher in vicinity shall be ensured.

14.7 INSPECTION ON ELECTRICAL INSTALLATION / APPLIANCES

1. Ensure proper earthing in electrical installation
2. Use of ELCB at electrical booth
3. Electrical installation shall be properly covered at top where required
4. Use appropriate PPEs while working
5. Use portable electrical light < 24 V in confined space and potentially wet area.
6. Monthly inspection shall be carried out as per Format no. HSEP: 14-F12.

14.8 INSPECTION OF ELEVATOR

1. Elevators shall be inspected by concerned supervisors once in a week as per Format no. HSEP: 14-F13.
2. All elevators shall be inspected by competent person and validity shall be ensured.
3. The date of third party inspection and next due date shall be painted on elevator.

14.9 MONTHLY SITE INSPECTION

Subcontractor shall carry out monthly HSE inspection of all work areas as per Format No. HSEP:14-F20 and submit to BHEL

14.10 NON-CONFORMITY HANDLING:

Any serious non-conformances identified during inspection observed shall be addressed immediately.

In case immediate closure of non-conformities is not possible:

- a. work to be halted in the area
 - b. Non-conformance to be generated and submitted to responsible person and BHEL
 - c. non-conformance to be resolved through responsible agency / person
- Only after closure of serious non-conformances, work to be allowed to resume.

All non-conformances & safety violations to be recorded and closed in a time bound manner.

15 HSE PERFORMANCE

HSE performance of subcontractor shall be monitored as per BHEL criteria, based on which, marks will be awarded. Marks can be used to evaluate and rate the contractor as per BHEL internal systems. Format for vendor HSE performance evaluation is attached in annexure (Format No. HSEP:14-F33)

Subcontractor shall make available all data required for evaluation to BHEL as and when demanded.

1. If safety record of the subcontractor in execution of the awarded job is to the satisfaction of safety department of BHEL, issue of an appropriate certificate to recognize the safety performance of the subcontractor may be considered by BHEL after completion of the job.
2. 1.5% of running bill shall be cleared subject to certification of desired safety performance by BHEL

16 HSE PENALTIES FOR NON-COMPLIANCE

1. Nonconformity of safety rules and safety appliances will be viewed seriously and BHEL has right to impose fines on the subcontractor for every instance of violation noticed.
2. The applicable penalties for HSE violations are given in Format No. HSEP14-F14 of this document

3. The list of non-compliances given in above format is not exhaustive. The BHEL site in-charge has liberty to impose a penalty for any other non-compliance and incidents of any nature.
4. If principal customer or statutory and regulatory bodies impose penalty on ground of statutory non-compliance or non-compliance of HSE rules by the subcontractor or any incident of any nature including fatality or permanent disability, the same shall be passed on to the subcontractor with appropriate overhead
5. The penalty amount shall be recovered from subcontractors from the RA Bill, otherwise Final bill.

17 COMPENSATION TO ACCIDENT VICTIMS

1. BHEL shall recover the amount of compensation paid to victim(s) by BHEL towards loss of life / permanent disability due to an accident which is attributable to the negligence of contractor, agency or firm or any of its employees as detailed below.
 - b. **Victim:** Any person who suffers permanent disablement or dies in an accident as defined below.
 - c. **Accident:** Any death or permanent disability resulting solely and directly from any unintended and unforeseen injurious occurrence caused during the manufacturing/ operation and works incidental thereto at BHEL factories/ offices and precincts thereof, project execution, erection and commissioning, services, repairs and maintenance, trouble shooting, serving, overhaul, renovation and retrofitting, trial operation, performance guarantee testing undertaken by the company or during any works / during working at BHEL Units/ Offices/ townships and premises! Project Sites.
 - d. **Compensation in respect of each of the victims:**
 - i. In the event of death or permanent disability resulting from Loss of both limbs: Rs. 10,00,000/- (Rs. Ten Lakh)
 - ii. (ii) In the event of other permanent disability: Rs. 7,00,000/- (Rs. Seven Lakh)
 - e. **Permanent Disability:** A disablement that is classified as a permanent total disablement under the proviso to Section 2 (I) of the Employee's Compensation Act, 1923. "
2. In addition to above, contractor shall provide appropriate compensation to victims of major and fatal incidents as per Employee Compensation Act, 1923, ESIC Act, 1948 or as per any existing Acts and guidelines

18 INTERNAL & EXTERNAL HSE AUDITS

1. Subcontractor shall extend full co-operation and maintain necessary documents & records as required by Internal & External HSE Audit carried out by BHEL. / Third Party
2. All non-conformities and observations on HSE shall be disposed of-by subcontractor in a time bound manner as detailed in Audit Report.
3. All required corrective actions shall be taken by the subcontractor in order to avoid recurrence

19 OTHER REQUIREMENTS

1. In case of any delay in completion of a job due to mishaps attributable to lapses by the subcontractor, BHEL shall have the right to recover cost of such delay from the payments due to the subcontractor, after holding an appropriate enquiry and notifying the subcontractor suitably.

2. RISK & COST:

If the subcontractor fails to improve the standards of safety in its operation to the satisfaction of BHEL after being given reasonable opportunity to do so and/or if the subcontractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instruction regarding safety as per contractual requirements, BHEL shall have the right to take corrective steps at the risk and cost of the subcontractor after giving a notice of not less than 7 days indicating the steps that would be taken by BHEL.

3. If the subcontractor succeeds in carrying out its job in time without any fatal or disabling injury incident and without any damage to property BHEL may, at its sole discretion, favourably consider to reward the subcontractor suitably for the performance.
4. The subcontractor shall take all measures at all the sites of work to protect all persons from incidents and shall be bound to bear the expenses of every suit, action or other proceeding of law that may be brought by any persons for injury sustained, death or damage to environment

owing to neglect of the HSE precautions by the subcontractor; and shall be liable to pay any such persons such compensation, should such claim proceeding be filed against BHEL.

The subcontractor hereby agrees to indemnify BHEL against the same.

20 HSE REVIEW

BHEL shall hold HSE review meeting every month or as per requirement in order to discuss and resolve HSE issues of site and improve HSE performance. It will also discuss the incidents occurred since previous meeting, its root cause and Corrective action. The indicative agenda is given below:

1. Implementation of earlier MOM
2. HSE performance review
3. HSE inspection review w.r.t non-conformances observed and their status
4. HSE audit and CAPA
5. HSE training conducted and requirement
6. Health check-up camp
7. HSE planning for the erection and commissioning and installation activities in the coming month
8. HSE reward and promotional activities
9. HSE data analysis and improvement – Data analyzed will include non-conformances closed and pending, incident data, training data etc.

Subcontractor shall ensure presence of site in-charge, all package in-charges and safety officers, as communicated by BHEL in the meeting.

Subcontractor shall take requisite actions as per record notes and as decided in the meeting, in a time bound manner and submit compliance report to BHEL.

21 FORMATS USED

This is minimum list of Formats to be used for reporting by the subcontractor. Other Formats are indicated in respective HSE Procedures, Work Permits, OCPs or as specified by BHEL. The medium of reporting can be hard / soft as indicated by BHEL.

BHEL can modify these Formats or introduce new Formats to the extent necessary to get the desired performance data of all HSE activities.

SN	Format Name	Format No.	Frequency of check	Rev
1	Work at Height Permit	HSEP:14-FP01	Before start of work and regularly thereafter as per Permit conditions	00
2	Hot Work Permit	HSEP:14-FP02		00
3	Confined Space Work Permit	HSEP:14-FP03		00
4	Excavation Work Permit	HSEP:14-FP04		00
5	Radiation Work Permit	HSEP:14-FP05		00
6	Lifting Activity Work Permit	HSEP:14-FP06		00
7	Lockout-Tagout Work Permit	HSEP:14-FP07		00
8	Inspection of First Aid Box	HSEP:14-F01	Weekly	00
9	Health Check Up	HSEP:14-F02	With new Induction & as per requirement thereafter	00
10	HSE Induction / Regular / On-the-Job Training	HSEP:14-F03	With new Induction & as per requirement thereafter	00
11	Tool Box Talk	HSEP:14-F04	Daily before job start	00
12	Site HSE Report	HSEP:14-F05	Monthly	00
13	PPE Inspection	HSEP:14-F06	Weekly	00
14	PPE Issue and Receipt	HSEP:14-F06A	With new Induction	
15	Inspection of T&Ps (General)	HSEP:14-F07	Monthly / As per requirement	00
16	Inspection of Cranes	HSEP:14-F08	Monthly / As per requirement	00
17	Inspection of Winches	HSEP:14-F09	Monthly / As per requirement	00
18	Inspection of Height Working	HSEP:14-F10	Daily / As per requirement	00
19	Inspection on Welding & Gas Cutting	HSEP:14-F11	Weekly / As per requirement	00
20	Inspection on Electrical Installation	HSEP:14-F12	Weekly / As per requirement	00
21	Inspection on Elevator	HSEP:14-F13	Weekly / As per requirement	00
22	HSE Penalty	HSEP:14-F14	-	00
23	Initial Verification of PPE's & Lifting Tools & Tackles	HSEP:14-F15	As and when new PPEs and T&Ps are received	00
24	Inspection of Labor Colony	HSEP:14-F16	Monthly / as per requirement	00
25	Recording of First Aid Injuries	HSEP:14-F17	As and when such injuries occur	00
26	E-waste Handled / Generated	HSEP:14-F18	Half Yearly	00
27	Hazardous Waste at the Facility	HSEP:14-F19	Half Yearly	00
28	HSE Checklist-cum-Compliance Report	HSEP:14-F20	As per Audit Calendar	00
29	Illumination Levels	HSEP:14-F21	Weekly / As per requirement	00
30	Incident Reporting	HSEP:14-F22	-	00
31	Incident Recording	HSEP:14-F23	-	00
32	Monthly HSE Planning & Review	HSEP:14-F30	Monthly	00
33	Daily HSE Reporting	HSEP:14-F31A	Daily	00
34	Job Safety Analysis	HSEP:14-F32B	Before starting new job	00
35	Evaluation of HSE Performance	HSEP:14-F33	Monthly	00



HSEP:14-FP01

WORK AT HEIGHT PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1	All workers on job are competent and medically fit (No Height Phobia) for working at height		
2	Hazards in the vicinity are identified, controlled and communicated to the worker.		
3	Scaffolding soundness inspected is available for use with valid tag		
4	Work platform is not made of bamboo or weak material. Barricading is available with Top, Mid Rails and Toe Guard.		
5	Working platform is clean without any unwanted material. Floor openings are covered.		
6	Access and exit to workplace are safe, marked and without obstruction.		
7	Adequate lighting provided (for dark hours) as per applicable lux standards (Refer HSEP:13)		
8	Safety nets are provided below working area.		
9	Area below the working platform has been cleared of all activity		
10	Ladders have been secured, inspected and provided as per BHEL standard/contract.		
11	Horizontal life lines are provided to cater to design specification of 2300 kg per person.		
12	Safety harness with life line support/ fall arrester are checked and available in working condition		
13	Safety shoes (non-slip), Helmet with chin strip available with employees		
14	Visible Signboards provided on working platforms in workers' understandable language		
15	All lifting / tightening tools, hand tools/equipment checked and in good condition		
16	ELCB provided for Electrical connections individually. Electrical cable, welding Hose/Compressed air hose properly secured and laid down without obstruction. Earth resistance is OK.		
17	Crane / Winch / Hydra operator is qualified and experienced		
18	Emergency response team & Medical Facilities available. Work area is cordoned off.		
19	Job Safety Analysis Submitted		
20	Additional Permits to be taken (Please specify & attach):		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	
Signature:	
Name:	Designation:

Site Safety Officer (Sub-Contractor):	
Signature:	
Name:	Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	
Signature:	
Name:	Designation:

Site Safety Officer (BHEL):	
Signature:	
Name:	Designation:

Package-in-charge (BHEL):	
Signature:	
Name:	Designation:

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for working at height of 2 mtr. and above or above excavation of 2 mtr or deeper.
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day only after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work at height, height phobia needs to be ascertained and proper fitness certificate to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP02

HOT WORK PERMIT

HID-001-S2098:21

Permit No. & Date

Project & Unit:

Emergency Contact Nos:

BHEL Sub-contractor:

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Welder is trained and qualified with good attendance in on-the-job training		
2.	Area ensured safe and free from all hazards (explosives etc.) with barricading and safe inlet / exit		
3.	Proper ventilation and lighting provided (in case of dark hours).		
4.	Gas hoses are in good condition and not cut / leaking		
5.	Pressure gauges/Flash back arrestor (at both ends) provided and in working condition.		
6.	Gas pressure in cylinder is within limits and hydraulic test certificate is available		
7.	Gas cylinders are stacked vertically and not below the welding / cutting area. Regulator key is available with cylinder. Gas cylinders covered with shields to prevent falling splinters.		
8.	Power supply to welding machine is through ELCB of 30 mA rating, which is tested and found ok; Earthing is tested and found OK		
9.	Welding machine input/output cables, welding holder and weld return clamp (Holder) are insulated and in good condition.		
10.	In case of welding in enclosed / confined spaces, the integrity of the structure and supports are ensured, Gas Testing done and evacuation system ensured in place		
11.	Emergency STOP buttons are in working condition. Welder /Helper knows how to operate it.		
12.	Welder & Fitter trained to connect ground/work return clamps (Holder) to work place prior to energization of welding machine.		
13.	Personal Protective equipment Minimum applicable: safety helmet, safety goggles, welding helmet, safety (rubber) shoes, leather gloves, long sleeve and nose mask -provided		
14.	In case of pits, water removed from the pit and wood/rubber insulation provided.		
15.	Safety signboards / cautions are in place.		
16.	Adequate and Suitable nos. of applicable firefighting extinguisher provided.		
17.	Nearby combustible material removed. Housekeeping done.		
18.	All workers explained about the hazards		
19.	First aid in attendance.		
20.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):
Signature:
Name: _____ Designation: _____

Site Safety Officer (Sub-Contractor):
Signature:
Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):
Signature:
Name: _____ Designation: _____

Site Safety Officer (BHEL):
Signature:
Name: _____ Designation: _____

Package-in-charge (BHEL):
Signature:
Name: _____ Designation: _____

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all kinds of Hot Work eg. Welding, cutting etc..
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day only after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP03

CONFINED SPACE WORK PERMIT**Project & Unit:****BHEL Sub-contractor:****Permit No. & Date****Emergency Contact Nos:**

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Has the equipment been Isolated from Power/Steam/Air?		
2.	Has the equipment been Isolated from liquid or gases?		
3.	Has the equipment been de-pressurized &/or drained?		
4.	Has the equipment been Blanked/blinded or disconnected?		
5.	Has the equipment been water flushed &/or steamed?		
6.	Whether man ways open and ventilated?		
7.	Whether constant Inert gas flow arranged?		
8.	Whether mechanically ventilated and adequately cooled?		
9.	Whether 24 V lighting provided inside the confined space?		
10.	Whether Radiation sources removed?		
11.	Whether training on confined space provided to the individual / group?		
12.	Whether required PPEs (hand gloves, goggles, face shield, ear plug/muff, protective clothing etc.) used?		
13.	Whether Safety harness and Lifeline used?		
14.	Whether Dust/Gas/Air Line mask used?		
15.	Whether attendant with SCBA/Air mask available?		
16.	Whether grounded air Exhaust/Blower/ AC provided?		
17.	Whether Personal Gas alarm provided?		
18.	Whether communication Equipment Provided?		
19.	Whether rescue equipment/team available?		
20.	Whether firefighting arrangement done		
21.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):
Signature: _____
Name: _____ Designation: _____

Site Safety Officer (Sub-Contractor):
Signature: _____
Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):
Signature: _____
Name: _____ Designation: _____

Site Safety Officer (BHEL):
Signature: _____
Name: _____ Designation: _____

Package-in-charge (BHEL):
Signature: _____
Name: _____ Designation: _____

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all confined space tasks, where injury can happen due to lack of oxygen, or chances of fire are there due to gas accumulation.
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP04

EXCAVATION WORK PERMIT

Permit No. & Date

Project & Unit:

Emergency Contact Nos:

BHEL Sub-contractor:

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1	Precautions taken for Underground Electrical Cable		
2	Precautions taken for Under / Above ground sewer/Drinking Water Line		
3	Precautions taken for Underground Telecommunication Line		
4	Precautions taken for Underground Product/Utility Line		
5	Precautions taken for Underground Fire Water Line		
6	Shoring / Shuttering / Sheet piling done to prevent collapse of excavation walls. Strength of Excavation wall ensured at all times		
7	Hard Barricading & Edge Protection provided		
8	Separate Safe Access for Man and Vehicle		
9	Lighting arrangement		
10	Banks Man Provided		
11	Required basic PPEs provided		
12	Slope Cutting/Benching Maintained		
13	Excavated soil / Construction Material / equipment kept away from the edge.		
14	First aid in attendance.		
15	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	
Signature:	
Name:	Designation:

Site Safety Officer (Sub-Contractor):	
Signature:	
Name:	Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	
Signature:	
Name:	Designation:

Site Safety Officer (BHEL):	
Signature:	
Name:	Designation:

Package-in-charge (BHEL):	
Signature:	
Name:	Designation:

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all excavation tasks 1.22 mtr or deeper
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP05

RADIATION WORK PERMIT

TENDER NO PSER:SCT:FKK-S2079:20

Project & Unit:**BHEL Sub-contractor:****Permit No. & Date****Emergency Contact Nos:**

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	All the persons at the site informed/removed from the area.		
2.	Area around the source of radiation cordoned off with the rope/chord.		
3.	Radiation warning symbol/boards displayed around radiography work on rope/chord.		
4.	Radiographer worn radiation badges during testing and is within safe limits.		
5.	Radiography camera and carrying case box having radiation symbol.		
6.	Radiation Survey Meter is in working condition, calibrated & within validity period.		
7.	Radiographer has valid certificate from BARC.		
8.	Blinking light provided on road during radiography (in dark hours).		
9.	Proper required Illumination provided		
10.	Safe access and working platform provided to conduct RT work		
11.	All the persons involved in Radiography work are aware of the hazard of radiation		
12.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):
Signature: _____
Name: _____ Designation: _____

Site Safety Officer (Sub-Contractor):
Signature: _____
Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):
Signature: _____
Name: _____ Designation: _____

Site Safety Officer (BHEL):
Signature: _____
Name: _____ Designation: _____

Package-in-charge (BHEL):
Signature: _____
Name: _____ Designation: _____

Verified by Customer Representative (if applicable), Name: _____	Sign: _____	Date: _____	Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all activities in which there is danger of exposure to harmful radiation
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP06

LIFTING ACTIVITY WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Crane used for lifting activity TPI tested, certified and approved for rated lifting		
2.	All lifting tackles, gears/appliances are tested and certified for lifting works.		
3.	Crane operator is trained and competent for lifting operation.		
4.	Lifting sling/ belt is protected against sharp edge of the jobs to be lifted.		
5.	Lifting hook is properly latched to prevent material falling over		
6.	Access and exit marked and without obstruction.		
7.	In case of lifting multiple materials at once, same are tied up with strong rope / material		
8.	Area below lifting activity barricaded to prevent movement		
9.	Minimum 2 guidelines have been provided for balancing and guiding jobs to be lifted.		
10.	Periphery area of crane booms as well as lifting job is barricaded and unauthorized/no-entry sign board posted.		
11.	Rigger and signal man is trained and competent for lifting work. Signal is clearly visible to the operator and understood		
12.	No lifting activity to be carried out during lightening, heavy wind/rain. No forecast of these conditions during work period		
13.	If scaffolding to be used during lift, scaffolding with valid tag available for use.		
14.	Add drawing /procedure etc. relevant for the lifting.		
15.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	Site Safety Officer (Sub-Contractor):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	Site Safety Officer (BHEL):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____
Package-in-charge (BHEL):	
Signature:	
Name: _____ Designation: _____	

Verified by Customer Representative (if applicable), Name:	Sign:	Date:	Time:

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

TENDER NO.PSER-SCT-EKK-S2079:20

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all Heavy Lifting Activities that are either / all of the following: 1. Above 50 Tons; 2. Tandem Lifting; 3. Total Load exceeding 75% of capacity of crane; 4. Lift of unusual difficulty or geometry or rigging; 5. Lift over operating Units; 6. Any other Lift as decided by Site HSE / Erection
2	Job Safety Analysis (JSA) to be created for every Lift above 5 Tons.
3	This permit must be available at the work site all the times of the work.
4	Location and description of the work, and terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy: Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.



HSEP:14-FP07

**LOCKOUT/TAGOUT (LIVE ELECTRICAL
MAINTENANCE) WORK PERMIT**

Permit No. & Date

Project & Unit:

Emergency Contact Nos:

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

Tag No.	Device to be Tagged / Locked I.D. No.	Device Location	Device Position OPEN / CLOSED - ON/OFF	Lock No.	Tag Lock Placed by Name/Sign - Date/Time	Tag / Lock Removed by Name/Sign - Date/Time

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):
Signature:
Name: _____ Designation: _____

Site Safety Officer (Sub-Contractor):
Signature:
Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):
Signature:
Name: _____ Designation: _____

Site Safety Officer (BHEL):
Signature:
Name: _____ Designation: _____

Package-in-charge (BHEL):
Signature:
Name: _____ Designation: _____

Verified by Customer Representative (if applicable), Name: _____	Sign: _____	Date: _____	Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all maintenance and erection activities with danger of electrocution from Live Electric Power
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work, and terms applicable must be clearly indicated by the permittee.
4	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
5	Permit shall be issued for not more than 7 days including the issue date.
6	Permit shall be returned to the HSE Department of BHEL after completion of the job.
7	Before engaging anybody to work, competency and fitness to be ensured.
8	All safety precautions to be taken as per work site HSE plan.
9	Distribution of copy: Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.

**POWER SECTOR****Inspection of First Aid Box**FORMAT NO: **HSEP:14-F01**

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site:	
Name of Sub-Contractor:	
Inspected by:	
Date of Inspection:	

Number of employees in the site: - _____

Sl. No.	Item	No. Available	Remarks
1	No. of small sterilized dressings		
2	No of medium sized sterilized dressings		
3	No of large sized sterilized dressings.		
4	No of large sized sterilized burn dressings		
5	No of (15 grams) packets sterilized cotton wool		
6	No of pieces of sterilized eye pads in separate sealed packets.		
7	No of roller bandages 10 cm wide.		
8	No of roller bandages 5 cm wide.		
9	Whether tourniquet available		
10	Whether supply of suitable splints available.		
11	No of packets of safety pins.		
12	Whether kidney tray available		
13	Whether sufficient number of eye wash bottles, filled with distilled water or suitable liquid, clearly indicated by a distinctive sign which shall be visible at all times, available.		
14	Whether 4%-xylocaine eye drops, and boric acid eye drops and soda by carbonate eye drops available.		
15	Whether (60ml) bottle containing a two percent alcoholic solution of iodine available		
16	Whether (two hundred ml) bottle of mercurochrome (2 per cent) solution in water available.		
17	Whether 120ml bottle containing Sal volatile having the dose and mode of administration indicated on the label,		
18	Whether roll of adhesive plaster (6 cm X 1 meter) available		

**POWER SECTOR****Inspection of First Aid Box**FORMAT NO: **HSEP:14-F01**

REV NO.: 00

PAGE NO. 01 OF 02

Sl. No.	Item	No. Available	Remarks
19	No of rolls of adhesive plaster (2 cm X 1 meter)		
20	Whether snake bite lancet available.		
21	Whether (30 grams) bottle of potassium permanganate crystals available.		
22	Whether a pair scissors available		
23	Whether copy of the First-Aid leaflet issued by the Director-General, Factory Advice service and labor Institutes, Government of India available.		
24	Whether bottle containing 100 tablets (each of 5 grains) of aspirin available		
25	Whether Ointment for burns available		
26	Whether bottle of a suitable surgical anti-septic solution available		
27	Whether List of Contents pasted on First Aid Box along with respective expiry dates		

Signature of Subcontractor's Site I/C

Date:

	POWER SECTOR	FORMAT NO: HSEP:14-F02 REV NO.: 00 PAGE NO. 01 OF 02
	Health Check-Up	

Name of Site:	
Name of Sub-Contractor:	
Name of Employee:	
Age:	

History Of Past Illness	H/O Epilepsy:	
	H/O Drug Allergy:	
	H/O Diabetics/ Hypertension:	
	H/O Unconsciousness:	
Personal History		

EXAMINATION		OBSERVATION	
General Physical Examination			
Height			
Weight			
BMI			
Built And nourishment			
Pallor			
Temperature			
Chest Expansion	Inspiration	Expansion	
Lymph Node Enlargement			
Upper Limbs Strength & Function			
Lower Limbs Strength & function			
Spine Adequately flexible for the job concerned (Yes/No)			
Mental alertness and stability with good eye, hand and foot co-ordination.			
Ear, Nose, Throat			
Ear / Hearing			
Nose			
Throat			
Vision			
Left Eye	Right Eye		

**POWER SECTOR****Health Check-Up**FORMAT NO: **HSEP:14-F02**

REV NO.: 00

PAGE NO. 02 OF 02

EXAMINATION		OBSERVATION	
<u>Cardiovascular System Examination</u>			
Inspection			
Palpation	Pulse	BP	
Auscultation (Heart Sounds)			
<u>Respiratory System</u>			
Inspection	Respiratory Rate		
Palpation:			
Percussion			
Auscultation (Breath Sounds)			
<u>Examination of Abdomen</u>			
Inspection			
Palpation			
Auscultation (Bowel Sounds)			
Any Other			
Clinical Impression			

Signature of the examining doctor

Date:

HSE Induction / Regular / On-the-Job Training Records

PAGE NO. 01 OF 01

Name of Site:					
Name of Sub-Contractor:					
Date of Training (dd/mm/yyyy):		Duration (Hrs)			
		From		To	
Name & Details of Trainer:					
Subject of Training	Induction		On-The-Job Training (Give details)		
Name of Training Co-ordinator:					

[illegible]

Signature of Training Coordinator

TENDER NO PSER:SCT:FKK-S2079:20



POWER SECTOR

Toolbox Talk

FORMAT NO: HSEP:14-F04

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Sub-Contractors Name :	
Date :	

Topic	Name of person delivered Tool Box Talk	No. of Participants attended	Remarks

Signature of Site I/C of Subcontractor

Date:

	POWER SECTOR	FORMAT NO: HSEP:14-F05 REV NO.: 00 Page 01 of 6
	Monthly Site HSE Report	

Name of subcontractor:	Report Month:

A) Accidents/Incidents Details: -

a	Lost time in Accidents	No. of incidents	Man Hours Lost	No. of People Involved	No. of person reported to Govt.	
	For the Month					
	Cumulative					
b	Minor Injuries					
	For the Month					
	Cumulative					
c	Fires	No. of Near-Misses	No. of First- Aid cases	No. of persons injured	No. of equipment damaged	No. of Fire reported Outside
	For the Month					
	Cumulative					
d	Other mishaps not covered in a, b, c.	No. of Near-Misses	No. of First- Aid cases	No. of persons injured	No. of equipment damaged	Total near misses and First-Aid
	For the Month					
	Cumulative					

B) Data for Man-hours worked:

Details	Value	Remarks if any
No. of people		
Man Hours worked		
O.T. Hours		
Total Man Hours		
Grand Total of man hours worked during the month(A+B)		
Cumulative man-hours (from _____ to _____): (Since commencing of operations)		

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

	POWER SECTOR	FORMAT NO: HSEP:14-F05 REV NO.: 00 Page 02 of 6
	Monthly Site HSE Report	

C) Status of Deployment of Work force, Safety Officers/Supervisors & Construction Medical Officer(s) & Electricians:

Description	Name	Qualification & Experience
Safety Officers		
Safety Supervisors		
Construction Medical Officer		
Nursing Staff.		
Electricians		
Scaffolding Inspectors		
T&P Inspectors		

D) Status of deployment of manpower for critical HSE activities:

(All height work and other hazardous activities to be actively supervised by trained personnel. Area to be divided in manageable sections to ensure effective supervision at all times. For example, multiple elevations in a structure can be divided among multiple supervisors)

Activity	Location	Shift Timings	Personnel deployed	Remarks
Height Work	Boiler Unit- (Level 1-3)			
	Boiler Unit- (Level 4-6)			
	ESP			
Housekeeping	Boiler Unit-			
	ESP Unit			
Others				

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 03 of 6

E) Lifting Tools, Tackles, Equipment and Pressure Vessels:

Item	Nos. Deployed	Nos. Tested by competent person	Identification Nos. (Comma separated) (A)	Validities of Test Certificates (Comma separated – corresponding to column A)	Whether internal testing using Color Coding or similar system done
Winches					
Chain Blocks					
Wire Rope Slings					
Man Cages					
D-Shackles					
Air Compressors					
Crawler Cranes					
Mobile Cranes					
Hydra Cranes					
Hydraulic Jack					
Others					

F) Reverse Horns in Construction Vehicles:

Item	Nos. Deployed with serial numbers (Comma separated) (A)	Nos. Having Functional reverse horns	Inspection Dates (Comma separated corresponding to column A)
Transit Mixers			
Hydra Cranes			
Dumpers/Trippers			
Backhoes			
Other Vehicles			

G) ELCBs:

No. Of ELCBs provided with Serial Nos. (Comma separated) (A)	Nos. Functional	When They were last Tested (Comma separated corresponding to column A)

H) Electrical Earthing:

No. Of Earth resources with serial numbers and locations (Comma separated) (A)	Whether Double Earthing provided to all equipment	When they were last tested (Comma separated corresponding to column A)

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

	POWER SECTOR	FORMAT NO: HSEP:14-F05 REV NO.: 00 Page 04 of 6
	Monthly Site HSE Report	

I) Fire Extinguishers

Name & designation of person responsible for maintenance of Extinguishers at different locations : (Individual subcontractor's Safety Officers).

A. FIRE EXTINGUISHERS AT ERECTION SITE:

Type (Add more rows if required)	Sizes	Qty + Serial numbers (Comma separated) (A)	Healthiness – Last checked dates (Comma separated corresponding to column A)	Locations (Comma separated corresponding to column A)
FOAM TYPE				
SODA TYPE				
DRY TYPE (DCP)				
CO2 TYPE				

B. FIRE EXTINGUISHERS AT SITE OFFICES & STORES:

Type	Size (Add more rows if required)	Qty + Serial numbers (Comma separated) (A)	Healthiness – Last checked dates (Comma separated corresponding to column A)	Locations (Comma separated corresponding to column A)
FOAM TYPE				
SODA TYPE				
DRY TYPE (DCP)				
CO2 TYPE				

J) Tie-Ups with Emergency Services

Service (Add more rows if required)	Name, location & distance from site	Emergency contact details	Remarks
Hospital with ICU and facilities for orthopedic, neurological etc. trauma			
Fire services			
Others:			

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

	POWER SECTOR	FORMAT NO: HSEP:14-F05 REV NO.: 00 Page 05 of 6
	Monthly Site HSE Report	

K) Implementation of Checklist, Work Permits:

Item	Numbers During the Month	Major Deviations

Note:- Please attach photocopies of all filled Checklists & Work permits for that month.

L) Personal Protective Equipment Issued (Extend table for each subcontractor):

Item	Issued this Month	Nos. Issued up to the Month	Percentage of usage at Site (as per physical verification)
Name of subcontractor:			
Safety Helmet			
Safety Shoes			
Full Body Harness			
Fall Arrestor			
Safety Nets			
Hand Gloves			
Face shield			
Welder shield			
Nose Mask			
Reflective Jacket			
Other PPEs.			

M) Safety Observations by Subcontractor Executives- Observations package wise:

Topic	Date Of Programme	No. Of Participants	Level Of Participants

• Tool-Box talks on Safety:

Date	Tool Box Talk - No of Participants	Topic	Remarks

• Safety Induction Trainings:

Date	Safety Induction No. of Participants	Topic	Remarks

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

	POWER SECTOR	FORMAT NO: HSEP:14-F05 REV NO.: 00 Page 06 of 6
	Monthly Site HSE Report	

N) Progress of Management Programmes at Site

SL	Description Of MPs	Annual Plan	Achievement In This Month	Cumulative Achievement
A. Environment Improvement Programme				
1	Plantation of Trees			
2	Installation of Scrap Bins			
3	Chemical Storage & Handling system			
B. Improvement of Working Environment				
4	Increasing LTI free days			
5	Air Quality Monitoring			
6	Water Quality Monitoring			
7	Illumination level Monitoring			

O) HR Information:

Designation	Total No. Inducted	Total no. of Induction Balance	Total no. of Gate Pass Issued	Total no. of Gate Pass Balance	Total no. of Gate Pass Cancelled	Medical Checkup Completed	Medical Checkup Balance

P) Rewards on Account of Good Safety Performance

Serial Number	Reward Issued to	Details of Reward Issued (Amount etc.)	Brief Reason

Note: Photos of Reward Functions to be attached

Q) Other Safety initiatives / Safety Activities conducted (with photos, if any):

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Personal Protective Equipment Inspection**

FORMAT NO: HSEP:14-F06

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Item	Total Checked	Numbers Found in Order	Remarks
Safety Helmet			
Safety Shoes			
Full Body Harness			
Fall Arrestor			
Safety Nets			
Hand Gloves			
Face shield			
Welder shield			
Nose Mask			
Reflective Jacket			
Other PPEs (Specify)			

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Format for Register of Issue and Receipt of PPEs**

FORMAT NO: HSEP:14-F06

REV NO.: 00

PAGE NO. 01 OF 1

Site:**Subcontractor:**

S.N	Name of Person	Details of PPE(s) Issued (with Serial Numbers)	Date Issued	Receiver's Signature	Issuer's Name & Designation	PPE's verified OK / Remarks	Issuer's Signature

	POWER SECTOR	FORMAT NO: HSEP:14-F07 REV NO.: 00 PAGE NO. 01 OF 01
	Inspection Of T&Ps	

Name of Site :	
Name of Sub-Contractor :	
Date of Inspection :	

Sl.No.	Description	Remarks
1.0	Name of equipment	
2.0	Basic Information of equipment	
2.1	Specification	
2.2	Sr. No. of equipment	
2.3	Make	
2.4	Year of manufacture	
3.0	Major repairs / overhauls(Furnish details of work carried out)	Date(s) of major repair/overhaul
3.1		
3.2		
3.3	Repairs carried out at site	
4.0	Any performance test conducted	Yes/No
5.0	Document Submitted	Yes/No
6.0	Manufacturer's test / guarantee certificate	Available/ Not available
7.0	Performance test	Done/ Not Done
8.0	Acceptance Norms	
9.0	Committee Observations	
10.0	Date of next review (if accepted)	
Signature-Subcontractor HSE Officer		Signature-Subcontractor Site In-charge



POWER SECTOR

Inspection Of Cranes

FORMAT NO: HSEP:14-F08

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :

Name of Sub-Contractor :

Inspected by :

Date of Inspection:

Crane Reg. No (Make/Model)

Name of Driver/Operator

Sl.no.	Description	Observation	Measures
1	Valid Driving license		
2	Hook & Hook Latch		
3	Over Hoist limit switch		
4	Boom limit switch		
5	Boom Angle Indicator		
6	Boom limit cutoff switch		
7	Condition of Boom		
8	Condition of ropes		
9	Number of load lines		
10	Size and condition of the slings		
11	Stability of the cranes		
12	Soil Condition		
13	Swing Break And Lock		
14	Proper Break And Lock		
15	Hoist Break And Lock		
16	Boom Break And Lock		
17	Main Clutch		
18	Leakage in Hydraulic Cylinders		
19	Out riggers fully extendable		
20	Tyre pressure		
21	Condition of Battery And Lamps		
22	Guards of moving and rotating parts		
23	Load chart provided		
24	Number and position of pedant ropes		
25	Reverse Horn		
26	Load Test Details		
27	Operator's fitness		
28	Pollution under control certificate		
29	Fire extinguisher of appropriate type.		
30	Training of the operator		

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection Of Winches**

FORMAT NO: HSEP:14-F09

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Winch Reg. No (Make/Model) _____

Name of Operator _____

Sl. No.	Description	YES	NO	NA	Remarks
1	Has the copy of Third Party Inspection certificate been provided in winch machine shed?				
2	Is safe operating instructions displayed near winch?				
3	Is winch machine operator experienced enough to operate the winch machine?				
4	Is the winch machine operated by someone other than the winch machine operator?				
5	Is there guard provided in all moving parts like wheel and motor's shaft?				
6	Will it protect against unforeseen operational contingencies?				
7	Are brakes, clutch and locking arrangement working properly?				
8	Has it been ensured that the guard does not constitute a hazard by itself?				
9	Are the cranks and the connecting rods protected by guardrails?				
10	Is there provision for fully covered shed with wooden plank roof?				
11	Is wire rope free from any kind of damage or wear and tear?				
12	Is split pin provided for the protection of clutch and brake locking arrangement?				
13	Is pulley inspected by competent person and certified before use?				
14	Is pulley free from any wear and tear visually?				
15	Is winch rope barricaded with clipsheet for the protection of rope and person?				
16	Is the wire rope lubricated by cardium oil?				
17	Is there any friction in wire rope which may damage the wire rope rather than the rolling parts?				
18	Is there any oil leakage in the hydraulic system of the winch machine?				
19	Has it been ensured that the guard will not cause discomfort or inconvenience to operator?				
Total NO					
Total NA					
		% Compliance			

Signature of Site I/C of Subcontractor: _____

Date: _____



POWER SECTOR

Inspection of Height Working

FORMAT NO: HSEP:14-F10

REV NO.: 00

PAGE NO. 01 OF 2

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Sl. No.	Descriptions	Observation (Yes/No)	Remarks
A. General			
1	All the workers have been explained safe work method?		
2	Adequate illumination has been ensured.		
3	Work area inspected prior to the start of the work.		
4	Is the work area barricaded to prevent fall and platforms are of adequate strength (bamboo, jute / plastic ropes not to be used).		
5	The temporary work platforms & structures for height work including those used in Boiler structures, water walls, ESP, Powerhouse are fully barricaded with railings (as per IS 3696)		
6	Fabricated makeshift arrangements are checked for quality and type of material welding, anchoring etc.		
7	Are floor gaps, permanently covered and barricaded		
8	Area below the work place barricaded, particularly below hot work.		
9	Workers provided with bags /box to carry bolts, nuts and hand tools		
10	Arrangement for fastening hand tools made.		
11	All work platforms ensured to be of adequate strength and ergonomically suitable.		
12	Work at more than one elevation at the same segment is restricted.		
13	An established communication system has been established and explained to the workers.		
B. Access/Egress			
1	Walkways provided with handrail, mid-rail and toe guard?		
2	All checkered plates, gratings properly welded/ bolted?		
3	Are ladders inspected and they are in good condition?		
4	Are ladders spliced?		
5	Are ladders properly secured to prevent slipping, sliding or falling?		
6	Stairs erected above and below 1 tier column for safe access?		
7	Do side rails extend 36" above top landing?		



POWER SECTOR

FORMAT NO: HSEP:14-F10

REV NO.: 00

PAGE NO. 02 OF 2

Inspection of Height Working

Sl. No.	Descriptions	Observation (Yes/No)	Remarks
8	Are built up ladders constructed of sound materials?		
9	Are rugs and cleats not over 12" on center?		
10	Metal ladders not used around electrical hazards.		
11	Proper maintenance and storage.		
12	Ladders placed at right slope.		
13	Ladders / staircases welded/ bolted properly.		
14	Any obstruction in the stairs.		
15	Are landing provided with handrails, knee rails, toe boards etc.?		
16	Whether ramp is provided with proper slope.		
17	Proper hand rails / guards provided in ramps.		
C. Housekeeping			
1	Walkways, aisles & all overhead workplaces cleared of loose material.		
2	Is any nut bolt/scrap left on beam/column?		
3	Flammable materials, if any, are cleared.		
4	All the de shuttering materials are removed after de shuttering is done.		
5	Platforms and walkways free from oil/grease or other slippery material.		
6	Collected scrap are brought down or lowered down and not dropped from height.		
D. PPE And Safety Devices			
1	Use of safety helmet, safety belts ensured for all workers		
2	Anchoring points provided at all places of work.		
3	Common lifeline provided wherever linear movement at height is required.		
4	Safety nets are use wherever required.		
5	Proper fall arrest system is deployed at critical workplaces.		
6	Crawler boards/Safety system or works on fragile roof are used.		
7	Is man-lift being used for personnel lifting?		
8	Does man basket / personnel lift system has an independent lifeline and all occupants safety harnesses connected to it with rope grab?		

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR**

FORMAT NO: HSEP:14-F11

REV NO.: 00

PAGE NO. 01 OF 02

Inspection of Welding and Gas Cutting

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Welding				
Sl.no.	Description	Y e s	N o	Remarks
1	Is electric connection given through 30 mA ELCB/RCCB to welding m/c?			
2	Is welding machine more than 10 years old?			
3	Is there provision of fuse and is it bypassed?			
4	Is electric cable fitted properly in junction box on m/c?			
5	Is electrical cable free from joints?			
6	Are the joints attached firmly & insulated with tape?			
7	Is double earthing given to body of m/c?			
8	Is the physical condition of the m/c good?			
9	Is ON/OFF switch connected to the m/c is working and in good condition?			
10	Are indication lamps on m/c working?			
11	Is the electrode holder in good condition?			
12	Are the cables of the welding m/c lugged & tight properly?			
13	Is cable to welding machine terminal joint loose / burnt / glowing?			
14	Are return lead connected properly (Rod, Angle, Channels shall not be used)			
	Total No of NO			
	Total No of YES			

Signature of Site I/C of Subcontractor:**Date:**

**POWER SECTOR****Inspection of Welding and Gas Cutting**FORMAT NO: **HSEP:14-F11**

REV NO.: 00

PAGE NO. 02 OF 02

Gas Cutting				
Sl.no	Description	Yes	No	Remarks
1	Are Cylinders kept on trolleys?			
2	Physical condition of Gas cylinders Good?			
3	Is there Oil/Grease on valve of the cylinder?			
4	Are pressure regulators in good condition?			
5	Condition of hose pipe OK?			
6	Are hose pipe clamped with hose clip?			
7	Is flash back arrestor & NRV fitted on torch both for O2 and LPG cylinder?			
8	Is nozzle of the torch cleaned?			
	Total Number of NO			
	Total No of YES			
	% Compliance			

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection Of Electrical Installation**

FORMAT NO: HSEP:14-F12

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Sr. No.	Contents	Yes/No	Remarks
A	Cable		
1.	Whether the condition of cable is checked?		
2.	Are cables received from other sites checked for insulation resistance before putting them into use?		
3.	Are all main cables taken either underground / overhead?		
4.	Are welding cables routed properly above the ground?		
5.	Are welding and electrical cables overlapping?		
6.	Is any improper joining of cables/wires prevailing at site?		
B	DBs/SDBs		
1.	Is earth conductor continued up to DB / SDB?		
2.	Whether DBs and extension boards are protected from rain / water?		
3.	Whether DB and extension board have separate MCB/ELCB		
4.	Is there any overloading of DBs / SDBs?		
5.	Are correct / proper fuses & CBs provided at main boards and sub-boards?		
6.	Is energized wiring in junction boxes, CB panels & similar places covered all times?		
C	ELCB		
1.	Whether the connections to all equipment are routed through individual ELCBs?		
2.	Is sensitivity of each ELCB maintained at 30 mA?		

**POWER SECTOR****INSPECTION OF ELECTRICAL INSTALLATION**

FORMAT NO: HSEP:14-F12

REV NO.: 00

PAGE NO. 02 OF 02

Sr. No.	Contents	Yes/No	Remarks
3.	Are the ELCB numbered and tested periodically & test results recorded in a logbook countersigned by a competent person?		
D	Grounding		
1.	Is natural earthing ensured at the source of power (main DB at Generator or Transformer)?		
2.	Whether the continuity and tightness of the earth conductor are checked?		
3.	Mention the gauge of the earth conductor used at the site.		
4.	Mention the value of Earth Resistance.		
E	Electrically operated Machines or Accessories.		
1.	Whether the plug top is provided everywhere.		
2.	Are all metal parts of electrical equipment and light fittings / accessories grounded / double earthed?		
3.	Is there any shed or cover for welding machines?		
4.	Are halogen lamps fixed at proper places?		
5.	Are portable power tools maintained as per norms?		
6.	Any other information:		

Signature of Site I/C of Subcontractor:

Date:

	POWER SECTOR	FORMAT NO: HSEP:14-F13 REV NO.: 00 PAGE NO. 01 OF 01
	Inspection of Elevator	

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Sr. No.	Description	Remarks
1.0	Name of equipment	
2.0	Basic Information of equipment	
2.1	Specification	
2.2	Sr. No. of equipment	
2.3	Make	
2.4	Year of manufacture	
3.0	Major repairs/overhauls(Furnish details of work carried out)	Date(s) of major repair/overhaul
3.1		
3.2		
3.3	Repairs carried out at site	
4.0	Any performance test conducted	Yes/No
5.0	Document Submitted	Yes/No
6.0	Manufacturer's test / guarantee certificate	Available/ Not available
7.0	Performance test	Done/ Not Done
8.0	Acceptance Norms	
9.0	Committee Observations	
10.0	Date of next review (if accepted)	

Signature-Subcontractor/ Subcontractor's Safety Officer

Signature-Site Safety Officer (BHEL)

	POWER SECTOR	FORMAT NO: HSEP:14-F14 REV NO.: 00 PAGE NO. 01 OF 2
	HSE Penalty Format	

Sub: MEMO for Penalty for non-compliances in Safety and Fabrication Quality requirement

Following lapse (tick marked) was observed and penalty is imposed as stated at the bottom of this memo. It is requested that such occurrences may please be avoided in future.

S. No	Nature of Non - Compliance	Penalty (in Rs.)	Remarks
A. PPEs			
1.	Not wearing safety helmet / wearing without chin straps	500	Per Person/ day
2.	Not Wearing safety shoes	500	Per Person/ day
3.	Not wearing gloves, nose masks where required	350	Per Person/ day
4.	Not using grinding goggles while doing grinding operations	500	Per Person/ day
B. Height Work			
1.	Not providing Lifelines for height work	1000	Per location per day
2.	Not ensuring barricading of working platforms	1000	Per location per day
3.	Not using temporary platform during work at height	1000	Per case per day
4.	Not wearing safety belt while working at height (> 2 meters) or not anchoring to lifeline	2000	Per Person/ day
5.	Not providing proper barricades (caution tape at 2 elevations)	500	Per location per day
	Use of mobile phones by Height worker / Crane / Hydra Operator	1000	Per case per day
C. Electrical			
1.	Not using 24 V supply for lighting in confined spaces	500	Per case per day
2.	Lack of Electrical Earthing	2000	Per case per day
3.	Improper earthing of welding & Other electrical Machines. Earth resistance not OK	500	Per Machine per incidence
4.	Electrical plug not used for connection/ hand machines	500	Per connection per incidence
5.	Unsafe electrical practice like not installing ELCB/ RCCB	500	Per case per day
6.	Using frayed/ broken welding cables	500	Per machine per week
D. Lifting			
1.	Use of lifting equipment without having valid Third Party Test certificate	5000	Per equipment per seven days
2.	Lifting hooks without latches	500	Per hook per day
3.	Using damaged slings or not slinging properly	2000	Per event Per T&P
4.	Lifting cylinders without cage or rolling of cylinders	500	Per Event per incidence
5.	Non removal of scrap from platforms	1000	Per Event Per location per 7 days
E. Hot Work / Cylinder Handling			
20.	Gas cutting without flash back arrestor	2000	Per machine per incidence
21.	Gas cutting at height without sheet below	500	Per event
22.	Not keeping gas cylinders vertically / in trolley on ground	500	Per event
23.	Gas cutting with damaged hose pipes	500	Per event
	Not covering welding cylinder with top cover	500	Per event
F. Construction Vehicles			
24.	Not having valid driving license for the type of vehicle/ T&P	2000	Per driver per event
25.	Two wheeler entry in construction area	500	Per vehicle
26.	Using Hydra for material movement at site in unsafe manner	1000	Per case
27.	Using Two Hydra in Tandem for material movement	2000	Per case
28.	Vehicles, Hydras, Cranes, Dumpers and Earth Movers not having automatic back horns linked to gear	1000	Per Equipment per day
29.	Not using guide rope while moving material using Hydra or Crane	1000	Per event
30.	Violating speed limit during vehicle movement	1000	Per event

	POWER SECTOR	FORMAT NO: HSEP:14-F14 REV NO.: 00 PAGE NO. 02 OF 2
	HSE Penalty Format	

	Nature of Non - Compliance	Penalty in Rs.)	Remarks
Engineering / Administrative Controls / General			
31.	Major Accident – Victim not reporting for work within 48 hours – resulting in partial loss in earning capacity & termination / demotion in employment	200000	
32.	Fatal Accident/Accidents Resulting in total Loss in Earning Capacity #	500000	Per victim#
33.	Unsafe Act in violation of standards / clauses of this document	500-5000	Per case
34.	Activity carried out without safety work permit where applicable	2000	Per person per event
35.	Using untrained / unqualified personnel for hazardous work	2000	Per event
36.	Not maintaining proper hygiene in canteen as per BOCW	1000	Per event

or as deducted by customer, whichever is higher.

For repeated **major and** fatal incidents under the same subcontractor for the same package in the same Unit, the subcontractor will pay 2 times the penalty compared to previously paid

Details (if any) related to non- compliance (Name of persons, Nature of deficiency, etc.)

Penalty imposed:

1, Rate as per above chart _____

2. No. of Persons/ machine/ event/ labor _____

3. Total Penalty= 1. X 2. = _____

BHEL Personnel:

Signatures:

Name _____

Attachments: Photographs & Documentary proof (if available) for violation

Distribution: 1 Copy: to Sub- contractor Site In-charge,
1 Copy to Site Construction Manager (BHEL)

	POWER SECTOR	FORMAT NO: HSEP:14-F15 REV NO.: 00 PAGE NO. 01 OF 1
	Format for Initial Verification of PPE's & Lifting Tools & Tackles	

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

S. No	Particulars (Serial Number, make, model of PPE, T&P)	Accepted / Rejected	Remarks
Checked (Name & Sign. Of Subcontractor HSE Officer)		Verified (Name & Sign. Of Subcontractor Site In-charge)	

**POWER SECTOR****Format for Inspection of Labor Colony**

FORMAT NO: HSEP:14-F16

REV NO.: 00

PAGE NO. 01 OF 1

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

S. No	Particulars	No	Yes	Comments
1	Sufficient living space ensured for each occupant with Kitchen area			
2	Area cleanliness ensured through regular cleaning			
3	Toilet facility sufficient for all occupants available, in order with adequate lighting, cleaned regularly and in hygienic condition			
4	Washing facilities available with adequate water supply			
5	Availability of sufficient drinking water in protected tanks with weekly tank cleaning and source tested annually as per IS10500 ensured			
6	Adequate drainage to remove waste and rain water, no flooding			
7	"Unsafe for Drinking" posted near accessible non-potable water and sources; posted in language of occupants or universal symbol			
8	Prevention of mosquitoes, flies, and rodents in immediate housing area through insecticide sprays if required			
9	Electricity provided & electrical connections safety ensured			
10	Fans, Coolers / Quilts, Heaters provided as required to cater to weather conditions along with adequate electricity supply			
11	Houses Walls and roof tight and solid; floors rigid and durable, with smooth, cleanable finish in good repair			
12	Availability of nominal rate ration / common use items shop within / nearby the colony			
13	Emergency medical plan developed: (A) Potential injuries determined (B) Local EMS response determined (C) Qualified first-aid person on site, if required			
14	Emergency plans posted where employees gather			
15	Transportation to nearest suitable facility			

Any other checks:

Remarks:		Name & Sign. Of Subcontractor HSE Officer		



TENDER NO P SER: SCT: RGN-SZ098:21

POWER SECTOR

FORMAT NO: HSEP:14-F17

REV NO.: 00

PAGE NO. 01 OF 1

Format for Recording of First Aid Injuries

Name of Site:

Name of Subcontractor:

[illegible]

**POWER SECTOR**
**Format for Maintaining Records of E-waste
Handled / Generated**

FORMAT NO: HSEP:14-F18

REV NO.: 00

PAGE NO. 01 OF 1

(Generated Quantity in Metric Tons (MT) per year)

Site		
Subcontractor		
Date		
Types & Quantity of e-waste handled/generated**	Category	Quantity
	Item Description	
Types & Quantity of e-waste stored	Category	Quantity
	Item Description	
Types & Quantity of e-waste sent to collection center authorized by producer/dismantler/recycler/refurbisher or authorized dismantler/ recycler or refurbisher **	Category	Quantity
	Item Description	
Types & Quantity of e-waste transported*	Category	Quantity
	Item Description	
Name, address and contact details of the destination		
Types & Quantity of e-waste refurbished*	Category	Quantity
	Item Description	
Name, address and contact details of the destination of refurbished materials		
Types & Quantity of e-waste dismantled*	Category	Quantity
Name, address and contact details of the destination		
Types & Quantity of e-waste recycled*	Category	Quantity
Types & Quantity of materials recovered	Item Description	
	Quantity	
Name, address and contact details of the destination		
Types & Quantity of e-waste sent to recyclers by dismantlers	Category	Quantity
	Item Description	
Name, address and contact details of the destination		
Types and Quantity of other waste sent to respective recyclers by dismantlers / recyclers of e-waste	Category	Quantity
	Item Description	
Types and Quantity of e-waste treated & disposed	Category	Quantity
	Item Description	
Name, address and contact details of the destination		

Signature of Subcontractor Site In-charge:

Date

**POWER SECTOR****Format for Maintaining Records of Hazardous Waste at the Facility**

FORMAT NO: HSEP:14-F19

REV NO.: 00

PAGE NO. 01 OF 1

1. Name of Site:
2. Name of the Subcontractor:
3. Date:
4. Description of hazardous waste:

Physical form with description	Chemical form	Total volume and weight (in kg.)

5. Description of storage and treatment of hazardous waste:

Date	Method of storage of hazardous wastes	Date	Method of treatment of hazardous wastes

6. Details of transportation of hazardous waste:

Name & address of consignee of package	Mode of packing/of the waste for transportation	Mode of transportation to site of disposal	Date of transportation

7. Details of disposal of hazardous waste:

Date of disposal	Concentration of hazardous material in the final waste form	Site of disposal (identify the location on the relevant layout drawing for reference)	Method of disposal	Persons involved in disposal

8. Data of environmental surveillance:

Date of measurement	Analysis of ground water			Analysis of soil samples			Analysis of air sampling			Analysis of any other samples (give details)
	Location of sampling	Depth of sampling	Data	Location of sampling	Depth of sampling	Data	Location of sampling	Data		

9. Details of the hazardous wastes reused and recycled:

Date	Total quantity of hazardous waste generated	Details of hazardous waste minimization activity	Material received	Final quantity of waste generated	Net reduction in waste generation quantity and percentage

Signature of Subcontractor Site In-charge:

Date:

**POWER SECTOR****HSE Audit / Inspection Checklist-cum-Compliance Report**

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 01 OF 3

PROJECT: _____

CONTRACTOR: _____

DATE: _____

OWNER : _____

INSPECTION BY: _____

Note : write 'NA' wherever the items is not applicable

Item	Y e s	N o	Remarks	Action
HOUSEKEEPING				
Waste containers provided and used				
Passageways and walkways clear				
General neatness of working area				
Other				
PERSONNEL PROTECTIVE EQUIPMENT				
Goggles; shields				
Face protection				
Hearing protection				
Respiratory masks etc.				
Safety belts				
Other				
EXCAVATIONS / OPENINGS				
Openings properly covered or barricaded				
Excavations shored				
Excavations barricaded				
Overnight lighting provided				
Other				
WELDING, CUTTING				
Gas cylinders chained upright				
Cable and hoses not obstructing				
Fire extinguisher (s) accessible				
Others				
SCAFFOLDING				
Fully decked platforms				
Guard and intermediate rails in place				
Toe boards in place				
Adequate shoring				
Adequate access				
Others				
LADDER				
Extension side rails 1 m above				
Top of landing				
Properly secured				
Angle + 70° from horizontal				
Other				

**POWER SECTOR****HSE Checklist-cum-Compliance Report**

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 02 OF 3

HOISTS, CRANES AND DERRICKS				
Condition of cables and sheaf OK				
Condition of slings, chains, hooks OK				
Inspection & maintenance log maintained				
Outriggers used				
Signals observed and understood				
Qualified operators				
Others				
MACHINERY, TOOLS & EQUIPMENT				
Proper instruction				
Safety devices				
Proper cords				
Inspection and maintenance				
Other				
VEHICLE AND TRAFFIC				
Rules and regulations observed				
Inspection and maintenance				
Licensed drivers				
Other				
TEMPORARY FACILITIES				
Emergency instructions posted				
Fire extinguishers provided				
Fire-aid equipment available				
General neatness				
Others				
FIRE PREVENTION				
Personnel instructed				
Fire extinguishers checked				
No smoking in prohibited areas.				
Hydrants				
Clearance				
Others				
ELECTRICAL				
Proper wiring				
ELCB's provided				
Ground fault circuit interrupters				
Protection against damage				
Prevention of tripping hazards				
Other				
HANDLING & STORAGE OF MATERIALS				
Properly stored or stacked				
Passageways clear				
Other				
FLAMMABLE GASES AND LIQUIDS				
Containers clearly identified				
Proper storage				
Fire extinguisher nearby				
Other				

**POWER SECTOR****HSE Checklist-cum-Compliance Report**

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 03 OF 3

WORKING AT HEIGHT				
Safety nets				
Safety belts				
Safety helmets				
Anchoring of safety belt to the life line rope				
ENVIRONMENT				
Lubricant waste/engine oils properly dispose.				
Waste from Canteen, offices, sanitation etc. disposed properly.				
Disposal of surplus earth, stripping materials, expired batteries, oily rags and combustible materials done properly.				
HEALTH CHECKS				
Hygienic conditions at labor camps O.K.				
Availability of first-aid facilities				
Proper sanitation at site, office & labor camps.				
Arrangement of medical facilities.				
Measures for dealing with illness.				
Availability of potable drinking water for workmen & staff.				
Provision of crèches for children.				

Signature of Subcontractor Site In-charge:

Date:

**POWER SECTOR****Format for Inspection of Illumination / Lux Levels**

FORMAT NO: HSEP:14-F21

REV NO.: 00

PAGE NO. 01 OF 1

Name of Site :					
Name of Sub-Contractor :					
Inspected by :					
Date of Inspection :					
Details of Lux Meter Used for Illumination Checking					
Serial Number		Last inspection Date		Inspection Due Date	

S. No	Location	Applicable Lux Value	Measured Lux Value	Comments
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				

Any other checks:

Remarks:		Name & Sign. Of Subcontractor HSE Officer		

	POWER SECTOR	FORMAT NO: HSEP:14-F22 REV NO.: 00 PAGE NO. 01 OF 2
	Format for Incident Reporting	

Type of incident: Fatal/Major//Fire/Property damage (Tick what is applicable)

1	Name Of Site		3	Activity Area	
2	Scope Of Work		4	Name Of Contractor	
			5	NAME & DESIGNATION OF BHEL ACTIVITY I/C	
6	Date & Time Of Accident		7	Date Resumed	
8	No. Of Work-Days Lost by Victim (If Duty Not Resumed, Give Estimated Figure)				
9	No. Of Man-hours Lost By Others				
10	Personal Details Of Injured and/or Details Of Materials/Equipment/ Property Damaged				
Name			Name Of Material / Equipment / Property		
Period Of Employment					
Age	Yrs.	Sex	Male/Female	Estimated Cost	Actual Cost
Marital Status		Single/ Married			
Occupation				Nature Of Damage	
Part Of Body Injured					
Nature Of Injury					
Agency (Object / Equipment / Substance) Most Responsible For Causing Accident / Injury / Damage					
12	Person (Name & Designation) With Most Control Over Agency (Object / Equipment / Substance) Causing Accident Injury / Damage				
13	Describe Clearly How the Accident Occurred (Use Additional Sheet, If Required)				

**POWER SECTOR****Format for Incident Reporting**

FORMAT NO: HSEP:14-F22

REV NO.: 00

PAGE NO. 02 OF 2

Analysis

14	What Acts and/or Conditions Contributed Most Directly to This Accident	
15	What Are the Basic Reason for The Existence of These Acts and/or Condition?	
16	What Corrective Actions Have Been Taken to Prevent Accident Recurrence?	
	Date:	Signature Of Site HSE Coordinator
17	Comments of Head/Sox	
	Date:	Signature Of Head/SOX

Format for Incident Recording

PAGE NO. 01 OF 1

[illegible]

	POWER SECTOR	TENDER NO PSER:SCT:RGN-S2098:21 FORMAT NO: HSEP:14-F30 REV NO.: 00 PAGE NO. 01 OF 3
	Format for Monthly HSE Planning & Review	

Note: This is a template and can be modified in consultation with BHEL			
Name of the Site		Name of the Subcontractor	
Scope of Work		Date	
PART- A: PLAN OF HSE ACTIVITIES FOR THE MONTH OF.....			PART-B: REVIEW ON
SN.	Description of HSE Activity & Formats	Plan & Targets for the month	Review
1	Availability of First Aid Box at Required Places and Inspection thereof as per Format: Fo1	Areas 1.	
2	Health check-up as per Format: Fo2	Health check-up for Nos 1. New inductees 2. Drivers & Operators 3. Workers in following high risk areas: a. ...	
3	Induction training of newly joined workers as per Format: Fo3	Minimum No. of workers:	
4	Toolbox talks (TBT) conducted before start of work as per Format: Fo4	Locations of TBTs & No. of workers 1. ...	
5	PPE usage and issue as per Format: Fo6		
6	Inspection of T&Ps as per Format: Fo7	List of T&Ps to be inspected 1.	
7	Identification & Inspection Status of T&Ps as per Format: Fo8		
8	Inspection of Cranes & Winches as per Format: Fo9	List of Cranes & Winches & Nos. 1. ...	
9	Inspection of Height Working as per Format: F10	Areas: 1. ...	
10	Inspection of Welding & Gas Cutting operations as per Format: F11	Areas: 1. ...	
11	Inspection of Electrical Installations as per Format: F12	Locations: 1. ...	
12	Inspection of Elevators (as applicable) as per Format: F13	Locations: 1. ...	
13	Inspection of Excavation as per Format: F13E	Locations: 1. ...	

	POWER SECTOR		FORMAT NO: HSEP:14-F30 REV NO.: 00 PAGE NO. 02 OF 3
	Format for Monthly HSE Planning & Review		

SN.	Description of HSE Activity & Formats	Plan & Targets for the month	Review
14	Job Safety Analysis as per Format F32B	Activities: 1. ...	
15	Regular Job Specific Training (Re-training) for workers involved in hazardous activities	Topics/ Hazards & No. of workers 1. ...	
16	Mass housekeeping (HK) drive in work areas	Areas 1. ...	
17	Vertigo Test of Height workers	Minimum No. of workers:	
18	Deployment of qualified HSE Officers as per contract	Location(s) & Nos. 1. ...	
19	Deployment of qualified HSE Stewards as per contract	Location(s) & Nos. 1. ...	
20	Deployment of Safety tools & Equipment (Safety Nets, Lifelines, Fall arrestors, Man-cages, flashback arrestors, scaffolding etc.)	Tool/ Equipment & Location 1. ...	
21	Safety Walks by site in charge of agency (4 -Weekly once)	Dates:	
22	Safety walks by departmental head (8-Weekly twice)	Dates:	
23	Availability/ deployment of Safety posters/ placards/ signage at strategic locations	Locations: Nos. 1. ...	
24	Provision of clean drinking water sources for workers	Locations: Nos. 1. ...	
25	Provision of toilets for workers (separate for male & female workers)	Locations: Nos. 1. ...	
26	Rest sheds for workers during lunchtime, rain, dust storm etc.	Locations: Nos. 1. ...	
27	Availability of following in Labor colony	1. Clean drinking water 2. Toilets 3. Cleanliness & Hygiene 4. Grass cutting, 5. Fogging 6. Electrical Inspection ...	

	TENDER NO PSER:SCT:RGN-S2098:21 POWER SECTOR	FORMAT NO: HSEP:14-F30 REV NO.: 00 PAGE NO. 03 OF 3
	Format for Monthly HSE Planning & Review	

SN.	Description of HSE Activity & Formats	Plan & Targets for the month	Review
28	Availability of dust/ waste bins at various locations	Locations: 1. ...	
29	Availability of Ambulance (individual/ joint) in each shift	Ambulance No.	
30	Availability of emergency vehicle in each shift	Emergency vehicle	
31	Deployment/ Availability of tested Fire Extinguishers	Locations & Nos. 1. ...	
32	Tree plantation	Locations & Nos. 1. ...	
33	Waste disposal & Scrap Bins	Locations 1. ...	
34	Illumination checks	Locations 1. ...	
35	Safety award function: 1. Display of good practices Award presentation	Minimum 1 per month	
36	Submission of Daily Reports as per Format No.F31A	Daily Reports (Night & Day Shifts)	

PLAN		REVIEW	
<u>Agency</u> Name: Sign: Date:	<u>BHEL</u> Name: Sign: Date:	<u>Agency</u> Name: Sign: Date:	<u>BHEL</u> Name: Sign: Date:

**POWER SECTOR****Format for Daily HSE Reporting**

FORMAT NO: HSEP:14-F31 A

REV NO.: 00

PAGE NO. 01 OF 1

Note: Following format to be submitted (preferably) in excel/ soft copy by subcontractor daily at the end of each shift. Any photographs/ records to be attached

Site												Subcontractor																		
Year									Month										Day											
Night	Day	SHIFT	Submitted By	Work Area(s)	Staff	Man-Power	Safety Officers	Safety Stewards	Tool Box (Topics and No. of Participants)	Induction Training (No. of Participants)	Vertigo Test (Numbers Tested)	On-the-Job Training (Topic & participants)	Work Permits	Job Safety Analyses conducted	Height Work Inspection	Other Hazardous Activities Inspection	T&P Inspection (Names & Nos. Inspected)	Safety Walk (Designation, Areas)	HSE Meeting	Safety Reward (Details)	Housekeeping/ Dust Suppression/ Tree Plantation Activities (Locations/ Details)	Lost time Accident	Restricted Work Case	Medical Treatment Case	First Aid Case	Near miss	Property Damage/ Fire	Non-Compliances Submitted by BHEL	Complied by Agency	Any other Remarks/ Inputs
																	NA		NA	NA	NA									

**POWER SECTOR****Job Safety Analysis Format**

FORMAT NO: HSEP:14-F32B

REV NO.: 00

PAGE NO. 01 OF 1

Name of the Site	
Name of the Subcontractor	
Activity, Area	

HAZARDS					PRECAUTIONS	

(Name)	Submitted By (Agency HSE)		Reviewed By (BHEL Execution)		Approved By (BHEL HSE)	
(Sign)						
(Date)						

**POWER SECTOR- HQ**

TENDER NO PSER:SCT:RGN-S2098:21

FORMAT NO: HSEP:14-F33

REV NO.: 00

PAGE NO. 01 OF 3

Checklist for Evaluation of HSE Performance

SL	Parameter for Measurement	M/ O	Wt	Supporting Documents
1a	Induction training for new workers conducted through audio-visual medium & documented ?	M	1	Induction Training Records
1b	Tool box talk conducted regularly as per plan, and documented?	M	1	Toolbox Talk Records
1c	Contractor in charge and safety in charge attended safety meetings?	M	2	Minutes of Meeting
1d	Whether observations in safety meetings are complied before next meeting?	M	2	-do-
1e	Preparation and submission of Monthly HSE report within stipulated time	M	1	Report submission date
1f	Preparation and submission of Incident/near-miss report and RCA Report (as applicable) within stipulated time	M	1	Incident/ Near Miss Records
1g	Carrying out Inspections and submission of Inspection reports within stipulated time	M	1	Inspection Records
1h	Regular Job Specific Training ensured for High Risk Workers (through audio-visual medium) as per plan	M	1	Training & Attendance Records
2a	Whether the contractor is registered under BOCW	M	2	BOCW Registration Certificate
2b	Availability of Qualified safety officer (1 for every 500 labour)	M	2	Safety Officer qualification & experience records
2c	Availability of Qualified safety supervisor (1 for every 100 labour)	M	2	Safety Officer qualification & experience records
2d	All the workers are provided and using safety helmets and safety shoes/gum boots	M	2	PPE Issue Records, Inspection/ non-conformity records
2e	Housekeeping done on regular basis and scrap removal at site	M	1	Housekeeping records, Inspection/ non-conformity records
2f	Usage of Goggles/Face shields and Hand gloves for gas cutter and grinders		1	PPE Issue Records, Inspection/ non-conformity records
2g	Wall openings & floor openings are guarded?		1	Inspection/ non-conformity records
2h	Adequate illumination provided in all working area?		1	Inspection/ non-conformity records
2i	Safety posters, sign boards and emergency contact numbers in all prominent location are displayed?		1	Inspection/ non-conformity records
2j	Availability of automatic reverse horns, Main horn, hook latches for Vehicles, mobile cranes, Hydras		1	Inspection/ non-conformity records
2k	Ban of carrying mobile phones to work place is implemented for workers		1	Inspection/ non-conformity records
2l	Availability of Tags & Inspection Certificates for Cranes of all capacities		1	Master T&P List with internal & external test details
2l.2	Availability of Tags & Inspection Certificates for Winches of all capacities		1	Master T&P List with internal & external test details
2l.3	Availability of Tags & Inspection Certificates, color coding for Chain pulley blocks		1	Master T&P List with internal & external test details
2l.4	Availability of Tags & Inspection Certificates for Vehicles - Trailers, Dozers, Dumpers, Excavators. Mixers etc.		1	Master T&P List with internal & external test details
2l.5	Availability of Tags & Inspection Certificates for Welding machines, grinders, Drilling machines, etc.		1	Master T&P List with internal & external test details
2l.6	Availability of Tags & Inspection Certificates, colour coding for Wire rope slings etc.		1	Master T&P List with internal & external test details
2l.7	Availability of Tags & Inspection Certificates for Batching plants		1	Master T&P List with internal & external test details

TENDER NO PSER:SCT:FKK-S2079:20



POWER SECTOR- HQ

TENDER NO PSER:SCT:RGN-S2098:21

FORMAT NO: HSEP:14-F33

REV NO.: 00

PAGE NO. 02 OF 3

Checklist for Evaluation of HSE Performance

SL	Parameter for Measurement	M/ O	Wt	Supporting Documents
2m.1	Use of Lifting Permit as per requirement		1	Permit Records
2m.2	Use of Height Permit as per requirement		1	Permit Records
2m.3	Use of Hot Work Permit as per requirement		1	Permit Records
2m.4	Use of Excavation permit as per requirement		1	Permit Records
2m.5	Use of Confined space work permit as per requirement		1	Permit Records
2m.6	Use of Grating removal and safety net removal permit as per requirement		1	Permit Records
2m.7	Use of Lockout-Tag out permit as per requirement		1	Permit Records
2m.8	Use of Radiography permit as per requirement		1	Permit Records
2m.9	Use of Night/ Holiday Work Permit as per requirement		1	Permit Records
2m.10	Use of Any other Applicable Permit as per requirement		1	Permit Records
3a	Material safety data sheet(MSDS) available for all chemicals and displayed in usage and storage area?		1	Inspection/ non-conformity records
3b	Spillages of oil/concrete and other chemical is controlled and cleaned by proper method in case of spill?		1	Inspection/ non-conformity records
3c	Availability of adequate number of urinals in workplace and in elevations and maintained	M	1	
3d	Availability of rest rooms for workers at site	M	1	
3e	Availability of Drinking water facility at work spot		1	
3f	Hygienic Labour colony is provided for workers.		1	
4a	Is heavy/complex critical lifting permit obtained for heavy, complex materials before handling/erection activity?		1	Work Permit records
4b	Whether area below lifting activities barricaded		1	Inspection/ non-conformity records
4c	Availability of experienced rigging foreman		1	Experience details of rigging foreman
4d	Is agency is following proper storage and handling procedure as per manufacturer standard for all hazardous material?		1	Procedure for storage & handling
4e	Are oxygen and acetylene cylinders are transported to work place from storage area in trolleys		1	
5a	Whether all deep excavation has been protected by barrier		1	Inspection/ non-conformity records
5b	Sloping/benching & shoring provided for excavation as per requirement?		1	-do-
5c	Proper access and egress provided for excavations?		1	-do-
5d	Blasting is done in controlled manner?		2	-do-
6a	Whether Electrical booth is equipped with Co ₂ fire extinguishers and fire buckets filled with sand?		2	Inspection/ non-conformity records
6b	Availability of Illumination lamp in electric booth?		1	-do-
6c	whether Caution Boards have been displayed?		1	-do-
6d	Usage of Metal Plug top for all hand power tools ?		1	-do-
6e	Usage of Insulated welding cables.		1	-do-
6f	Electrical Booth/Distribution Board to be covered by proper Canopy.		1	-do-
6g	Availability of functional & individual 3oma ELCB / RCCB and MCB for protection and conducting periodical check-up?		1	-do-
6h	Double earthing for panel boards and all machinery & proper earth pit with regular inspection available?		1	-do-
6i	Whether Electrician is qualified and experienced		1	Qualification & Experience records of electrician
6j	Availability and usage of Rubber hand gloves by electrician?		1	Inspection/ non-conformity records

**POWER SECTOR- HQ**

TENDER NO PSER:SCT:RGN-S2098:21

FORMAT NO: HSEP:14-F33

REV NO.: 00

PAGE NO. 03 OF 3

Checklist for Evaluation of HSE Performance

SL	Parameter for Measurement	M/ O	Wt	Supporting Documents
7a	Whether Scaffolding pipes made with steel or aluminum, are being used and checked periodically by experienced/ certified scaffolder?		2	Inspection/ non-conformity records
7b	8mm Stainless Steel wire rope with plastic cladding is provided for life line (Vertical / Horizontal) during height work?		2	-do-
7c	Availability of emergency lighting in case of power failure		1	-do-
7d	Whether all the openings are covered with Safety Nets made of fire proof Nylon?		1	-do-
7e	Whether MS pipe rails around staircases & platforms in usage are provided with top, middle rails and toe guard ?		1	-do-
7f	Whether Ladder with vertical life line /Fall arrestor is available to climb?		1	-do-
7g	Whether all workers deployed for working at height have been issued height pass after undergoing vertigo test?		1	Height Pass records
7h	Whether all workers deployed for height work / climbing ladder are provided and using Double lanyard safety belt?		1	PPE Issue records, inspection/ non-conformity reports
7i	Is all hand tools/Small material used by height workers is tied firmly to prevent fall?		1	-do-
8a	Flash back arrestors for all gas cutting sets is available on Torch side and cylinder side		1	Inspection/ non-conformity records
8b	Oxygen/Acetylene/LPG cylinders not in use have caps in place and stored separately?		1	-do-
8c	Availability of Face screen, Hand gloves, and Apron, for welders		1	-do-
8d	Protection from falling hot molten metal during metal cutting / welding at height by providing GI sheet below the cutting area especially in fire prone areas		1	-do-
9a	Pre-employment medical check-up done for all workers and submitted?		1	Medical check records
9b	Availability of first aid center, with MBBS doctor(Own or Sharing basis)	M	2	Attendance records
9c	Availability of Ambulance facility 24 hours (Own or sharing basis)	M	2	-do-
9d	Is First aid trained personnel's are available and their names are displayed at site?	M	1	-do-
9e	Availability of Emergency vehicle at site		1	
9f	Periodical medical check-up is conducted for all the workers and submitted?		1	Medical check records
9g	Availability of sufficient number of first aid box as per standard list and maintaining record		1	Inspection records
10a	Availability of Fire extinguishers, buckets at all vulnerable points		2	Fire extinguisher records
10b	Periodic fire mock drill conducted?		1	Fire, Mock drill records
10c	Are all flammable materials are stored separately?		1	
10d	Periodic grass cutting is done in material storage area?		1	
10e	Availability of 24V DC lighting in confined space work area		1	
10f	Availability of exhaust fan in confined space work area		1	

Note:

- **M: Mandatory; O: Optional.** Points other than mandatory can be excluded with appropriate justification (scope etc.) by BHEL
- Additionally: 30 Marks for each Fatal Accident and 10 mark for each major accident shall be deducted.

SECTION-B

Special Requirements



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 01
Date: 08.05.20
Page 153 of 170

1. Establishment of Common Facilities for whole Project – cost to be borne in full by subcontractor.

Table 1.1

S. No.	Item	Details as per Clause No. of this Section	Applicable / Not Applicable with Remarks	Package
1	Construction of Medical Centre	a	Applicable	Civil
2	Construction of Worker Training Centre (A part of safety park)	b	Applicable	Civil
3	Construction of Vertigo Test Structure (A part of safety park)	c	Applicable	Civil
4	Deployment of Specialists	d	Applicable	By concerned agencies
5	HSE Equipment	e	Applicable	By concerned agencies
6	HSE measurement devices	f	Applicable	By concerned agencies
7	Urinals in under-construction structures	g	Applicable	By concerned agencies
8	Safety Park	h	Applicable	Civil

Note: Construction of Safety Park with allied infrastructure, is only applicable in those new projects of BHEL-PSER, where there is no established safety park.

a. MEDICAL CENTRE

- i. A medical center shall be setup at site with basic facilities for handling medical emergencies
- ii. Deployment of Medical Professional:
 1. **A qualified medical professional shall be deployed at site at all times.**
 2. **When total employee & worker strength at site crosses 500, medical professional with MBBS Degree from recognized institute shall necessarily be deployed**
- iii. Ambulance shall be deployed along with a trained driver and accessories as per Schedule V of BOCW Central Rules, 1998. Ambulance shall be utilized exclusively for transporting the accident victim. Ambulance drivers shall be regularly trained in First Aid.
- iv. Non deployment of Ambulance and First Aider as above shall invite a penalty of Rs. 30000 pm and Rs10000 PM respectively
- v. Medical waste shall be disposed as per prevailing legislation (Bio-Medical Waste – Management and Handling Rules, 1998).
- vi. Above are bare minimum requirements. Any legal requirements over and above these specifications shall supersede the above requirements



**POWER
SECTOR**

**HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)**

Doc. No.: HSEP:14-ER
Rev.: 01
Date: 08.05.20
Page 153 of 170

b. WORKER TRAINING CENTRE

- i. Indoor Worker Training Center to be developed at site with seating capacity of at least 50 trainees
- ii. Projector with following minimum specifications:

Native Resolution	XGA, 1024x768
Brightness (ANSI lumens)	3300
Contrast Ratio	13000:1
Display Color	30 Bits
Aspect Ratio	4:3

- iii. A Laptop or Desktop PC with following minimum specifications:

Processor	Intel Celeron Dual Core
Memory (RAM)	2 GB
Graphics Card	2GB Video Memory
Hard Disk Capacity	60 GB
Monitor Size	14 inches
Keyboard	
Mouse	

- iv. Stereo speakers with minimum 50W RMS sound output
- v. PA system for Addressing Workers
- vi. Seating arrangement

c. Development of Vertigo Test Structure:

Vertigo test Structure to be developed as per **Annexure 04**

d. Specialists:

Following specialists shall be deployed by the subcontractor, who shall cater to whole project as per BHEL requirements / instructions

- I. **Qualified T&P Inspector:** subcontractor shall engage one qualified T&P inspector having undergone a certification course in the discipline.
- II. **Qualified Scaffolding Erector and Inspector:** Subcontractor shall deploy one qualified Scaffolding Supervisor and Inspector having undergone a certification course in the discipline



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 01
Date: 08.05.20
Page 155 of 170

- e. **Tools & Equipment:** Following equipment conforming to relevant IS Codes for the job shall be ensured by subcontractor:

S. No.	Item
1	Lifelines
2	Retractable Fall Arrestors
3	Safety Nets (10m X 5m)
4	Sky Climbers
5	Fire Blanket
6	Honey Bee Removal Suit & Kit
7	Flashback Arrestors
8	Barricading Tape
9	Binoculars
10	Walkie-Talkies
11	LOTO kit
12	24-Volt light
13	Sand Buckets
14	Hard barricading planks
15	Standby Fire kits

S. No.	Item	Type of Job / Purpose	Remarks
1	Lifelines (Steel Rope) and posts	Height work	
2	Retractable Fall Arrestors	Height Work	
3	Safety Nets (for fall protection; railings also to be covered)	Height Work	
4	Sky Climbers	Height Work	
5	Fire Blanket, Spark/ slag collector	Hot Work	
6	Honey Bee Removal Suit & Kit	General	
7	Flashback Arrestors	Hot work	
8	Barricading –Hard (Scaffolding Pipes & Clamps or fabricated using structural/round	Height Work, Excavation, General Barricading	
9	Binoculars	HSE Inspection	
10	Walkie-Talkies	Lifting	
11	LOTO kit	Working on charged line	
12	24-Volt light	Confined Space/ temp work	
13	Sand and Water Buckets	Hot work/Electrical work	
15	Standby Fire kits Fire extinguisher stands	Hot work/Electrical work	



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 01
Date: 08.05.20
Page 156 of 170

Above equipment are bare minimum to be essentially maintained at all times. Additional numbers to be deployed as and when required in order to ensure fulfillment of all Safety requirements

f. HSE Measurement Equipment & Tools

S. No	Device
1	ELCB Tester
2	Multi meter (Light cables)
3	Earth Resistance Meter
4	Lux Meter
5	Decibel Meter
6	Anemometer
7	Breath Analyzer (Alcohol)
8	Multi-gas analyzer
9	Gas leakage detector / alarm
10	Gas monitor (confined space)
11	Radiation meter & Badges
12	Blood pressure monitor
13	Fire detectors
14	Dust Particle Detector

g. Urinals in Under-construction structures:

Urinals for in under-construction structures for easy access eg. In case of Boiler elevations etc.

2. Shared Facilities – where part of operating cost is borne by subcontractor in proportion to contract value

The subcontractor shall bear running expenses of above facilities on a 'proportional to contract value sharing basis as finalized by BHEL.

S. No.	Facility
1.	Operation of Ambulance, Nurses, Medical Consumables
2.	Construction, Maintenance & Upkeep of Latrines and Urinals in Common spaces
3.	Drinking Water Provision in Common Spaces
4.	Dust Control / Water Sprinkling, Pest Control, Fumigation at Site



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 01
Date: 08.05.20
Page 157 of 170

LIST OF REFERENCES

S. No	Code Name	Title
1	IS: 818-1888 (Reaffirmed 2003)	Code of Practice for Safety and Health requirements in Electric and Gas Welding and Cutting operations.
2	IS: 1179-1967 (Reaffirmed 2003)	Specification for Equipment for Eye & Face protection during welding.
3	IS: 1989 (Part 2):1986 (Reaffirmed 1997)	Specification for Leather Safety Boots & Shoes
4	IS:2925 – 1984 (Reaffirmed 2010)	Specification for Industrial Safety Helmets
5	IS:3521: 1999 (Reaffirmed 2002)	Industrial Safety Belts & Harnesses-Specification
6	IS:3646(Part II) – 1966(Reaffirmed 2003)	Code of Practice for Interior Illumination
7	IS:3696 (Part I) – 1987 (Reaffirmed 2002)	Safety Code for Scaffolds and Ladders
8	IS: 3696(Part 2) : 1991 (Reaffirmed 2002)	Scaffolds and Ladders-Code of Safety
9	IS: 3764:1992	Excavation Work – Code of Safety
10	IS:3786 – 1983 (Reaffirmed 2002)	Method for Computation of Frequency and Severity Rates for Industrial Injuries and Classification of Industrial Accidents
11	IS.4014.2.1967	Steel tubular Scaffolding
12	IS:4770: 1991 (Reaffirmed 2006)	Rubber Gloves Specification (Electricals Purposes)
13	IS:4912: 1978 (Reaffirmed 2002)	Safety Requirements for Floor and Wall Openings, Railings and Toe Boards
14	IS: 5557 – 1969	Industrial and Safety rubber knee boots.
15	IS: 5983 – 1980 (Reaffirmed 2002)	Specification for Eye-Protectors
16	IS:6519 – 1971 (Reaffirmed 1997)	Code of Practice for Selection, Care and Repair of Safety Footwear
17	IS.6549.1972	Glossary of terms used for Lifting tackles
18	IS:6994(Part I)-1973 (Re affirmed 1996)	Specification for Industrial Safety Gloves Leather and Cotton Gloves
19	IS.7215.1974	Steel Structure Fabrication
20	IS.7969.1975	Handling and storage of building material



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 01
Date: 08.05.20
Page 158 of 170

21	IS:8519 – 1977 (Reaffirmed 1983)	Guide for Selection of Industrial Safety Equipment for Body Protection.
22	IS:8520 – 1977 (Reaffirmed 2002)	Guide for Selection of Industrial Safety Equipment for Eye, Face and Ear Protection.
23	IS:9167:1979	Specification for Ear-Protectors
24	IS:9473:2002	Respiratory Protective Devices-Filtering Half Masks to protect against Particles-Specification.
25	IS: 9944:1992 (Reaffirmed 2003)	Natural and Man-made Fiber Rope Slings- Recommendations on Safe working loads.
26	IS 11006 : 2011	Flash Back(Flame) Arrestor Specification
27	IS: 11226 – 1985	Leather Safety footwear having direct molding sole.
28	IS:11057 – 1884 (Reaffirmed 2001)	Specification for Industrial Safety Nets
29	IS: 12254:1993 (Reaffirmed 2002)	Polyvinyl Chloride (PVC) Industrial Boots Specification
30	IS:13367(Part 1):1992 (Reaffirmed 2003)	Safe Use of Cranes-Code of Practice
31	IS: 14166:1994 (Reaffirmed 2002)	Respiratory Protective Devices-Full Face Masks Specification
32	IS:14746: 1999 (Reaffirmed 2003)	Respiratory Protective Devices-Half Masks and Quarter Masks - Specification
33	IS: 15397 :2003 (Reaffirmed 2008)	Portable Extinguisher Mechanical Foam Type(Stored Pressure)-Specification
34	IS: 19011:2002	Guidelines for Quality and/or Environmental Management Systems Auditing

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)	Doc. No.: HSEP:14 Rev.: 01 Date: Page 159 of 170

As per Contract Labor (Regulation & Abolition Act), Central Rules, 1971,

- (1) The first-aid box shall be distinctively marked with a Red Cross on a white background and shall contain the following items, namely:

(a) For establishments in which the number of contract laborers employed does not exceed fifty, each first aid box shall contain the following equipment:

(i)	6 small sterilized dressings
(ii)	3 medium size sterilized dressings
(iii)	3 large size sterilized dressings
(iv)	6 pieces of sterilized eye pads in separate sealed packets.
(v)	6 roller bandages 10 cm wide.
(vi)	6 roller bandages 5 cm wide.
(vii)	One tourniquet
(viii)	A supply of suitable splints
(ix)	Three packets of safety pins.
(x)	Kidney tray.
(xi)	3 large sterilized burn dressings.
(xii)	1 (30ml) bottle containing a two percent alcoholic solution of iodine
(xiii)	1 (30 ml) bottle containing Sal volatile having the dose and mode of administration indicated on the label
(xiv)	1 snake bite lancet
(xv)	1 (30gms) bottle of potassium permanganate crystals.
(xvi)	1 pair scissors
(xvii)	1 copy of the First-Aid leaflet issued by the Director General, Factory Advice Service and Labor Institutes, Government of India.
(xviii)	A bottle containing 100 tablets (each of 5 grains) of aspirin
(xix)	Ointment for burns
(xx)	A bottle of suitable surgical anti-septic solution

**HSEP:14 - ANNEXURE 03**

Details and Contents of First Aid Box

(b) For establishment in which the number of contract laborers exceeds fifty each first-aid box shall contain the following equipment:

(i)	12 small sterilized dressings
(ii)	6 medium size sterilized dressings
(iii)	6 large size sterilized dressings.
(iv)	6 large size sterilized burn dressings
(v)	6 (15 grams) packets sterilized cotton wool
(vi)	12 pieces of sterilized eye pads in separate sealed packets.
(vii)	12 roller bandages 10 cm wide.
(viii)	12 roller bandages 5 cm wide.
(ix)	One tourniquet.
(x)	A supply of suitable splints.
(xi)	Three packets of safety pins.
(xii)	Kidney tray.
(xiii)	Sufficient number of eye washes bottles filled with distilled water or suitable liquid clearly indicated by a distinctive sign which shall be visible at all times.
(xiv)	4 per cent Xylocaine eye drops, and boric acid eye drops and soda by carbonate eye drops.
(xv)	1 (60ml) bottle containing a two percent alcoholic solution of iodine
(xvi)	One (two hundred ml) bottle of mercurochrome (2 per cent) solution in water.
(xvii)	1 (120ml) bottle containing Sal volatile having the dose and mode of administration indicated on the label.
(xviii)	1 roll of adhesive plaster (6 cmX1 meter)
(xix)	2 rolls of adhesive plaster (2 cmX1 meter)
(xx)	A snake bite lancet.
(xxi)	1 (30 grams) bottle of potassium permanganate crystals.
(xxii)	1 pair scissors
(xxiii)	1 copy of the First-Aid leaflet issued by the Director-General, Factory Advice service and labor Institutes, Government of India.
(xxiv)	a bottle containing 100 tablets (each of 5 grains) of aspirin
(xxv)	Ointment for burns
(xxvi)	A bottle of a suitable surgical anti septic solution.

(2) Adequate arrangement shall be made for immediate recoupment of the equipment when necessary.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)

Doc. No.: HSEP:14


Rev.: 01

Date:

Page 161 of 170

Table 1

S. No.	Topic
1	Vertigo / Height working Test Structure Layout
2, 3	Structure Layout Sketch
3	Actual Photo of a typical structure
4	Bill of Materials
5	Guidelines for Conducting the Test

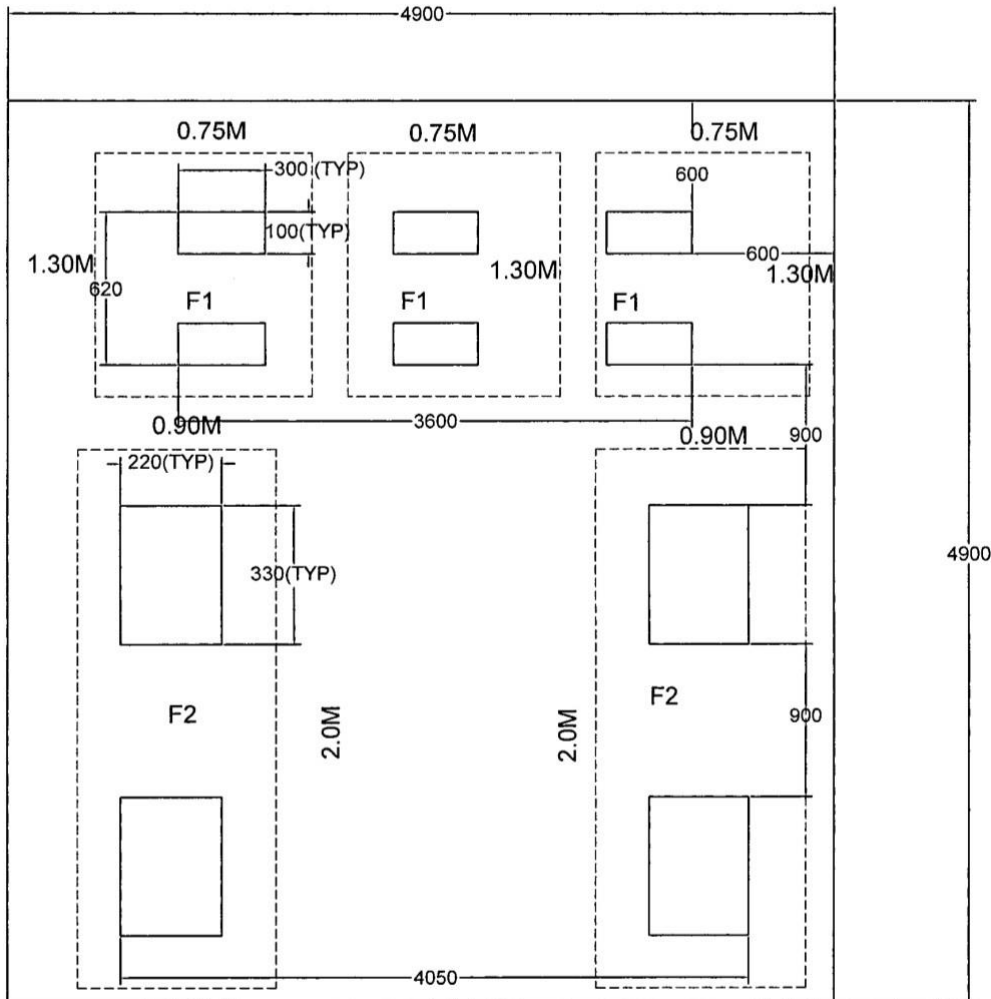

Note:

- All dimensions are in mm
- Drawing is not to scale
- Inside boundary area to be filled with sand to level with road (external)
- Details of F1 and F2 are shown below


Figure 1: Vertigo / Height Work Test Structure Layout



HSEP:14 - ANNEXURE 04

Vertigo Test Structure Specifications

Page 2 of 6

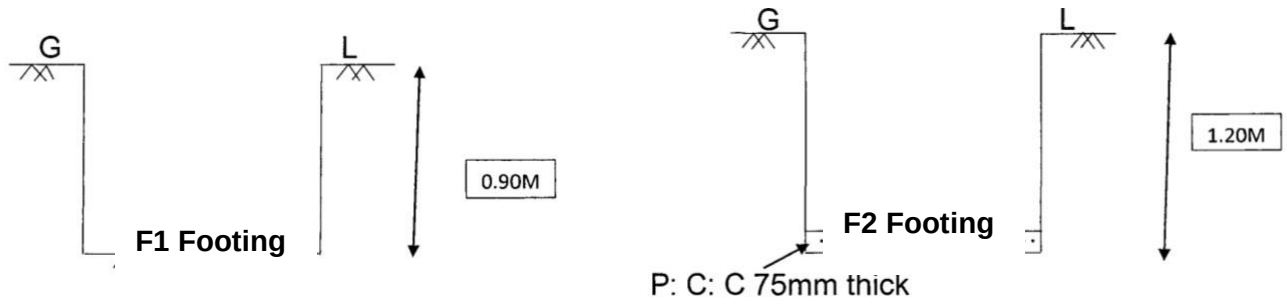

Note:

- Concrete Grade is M15
- Drawing is not to scale
- TOC is at Road Level
- G L refers to Ground Level

Figure 2

Vertigo Test Structure Specifications

Page 3 of 6


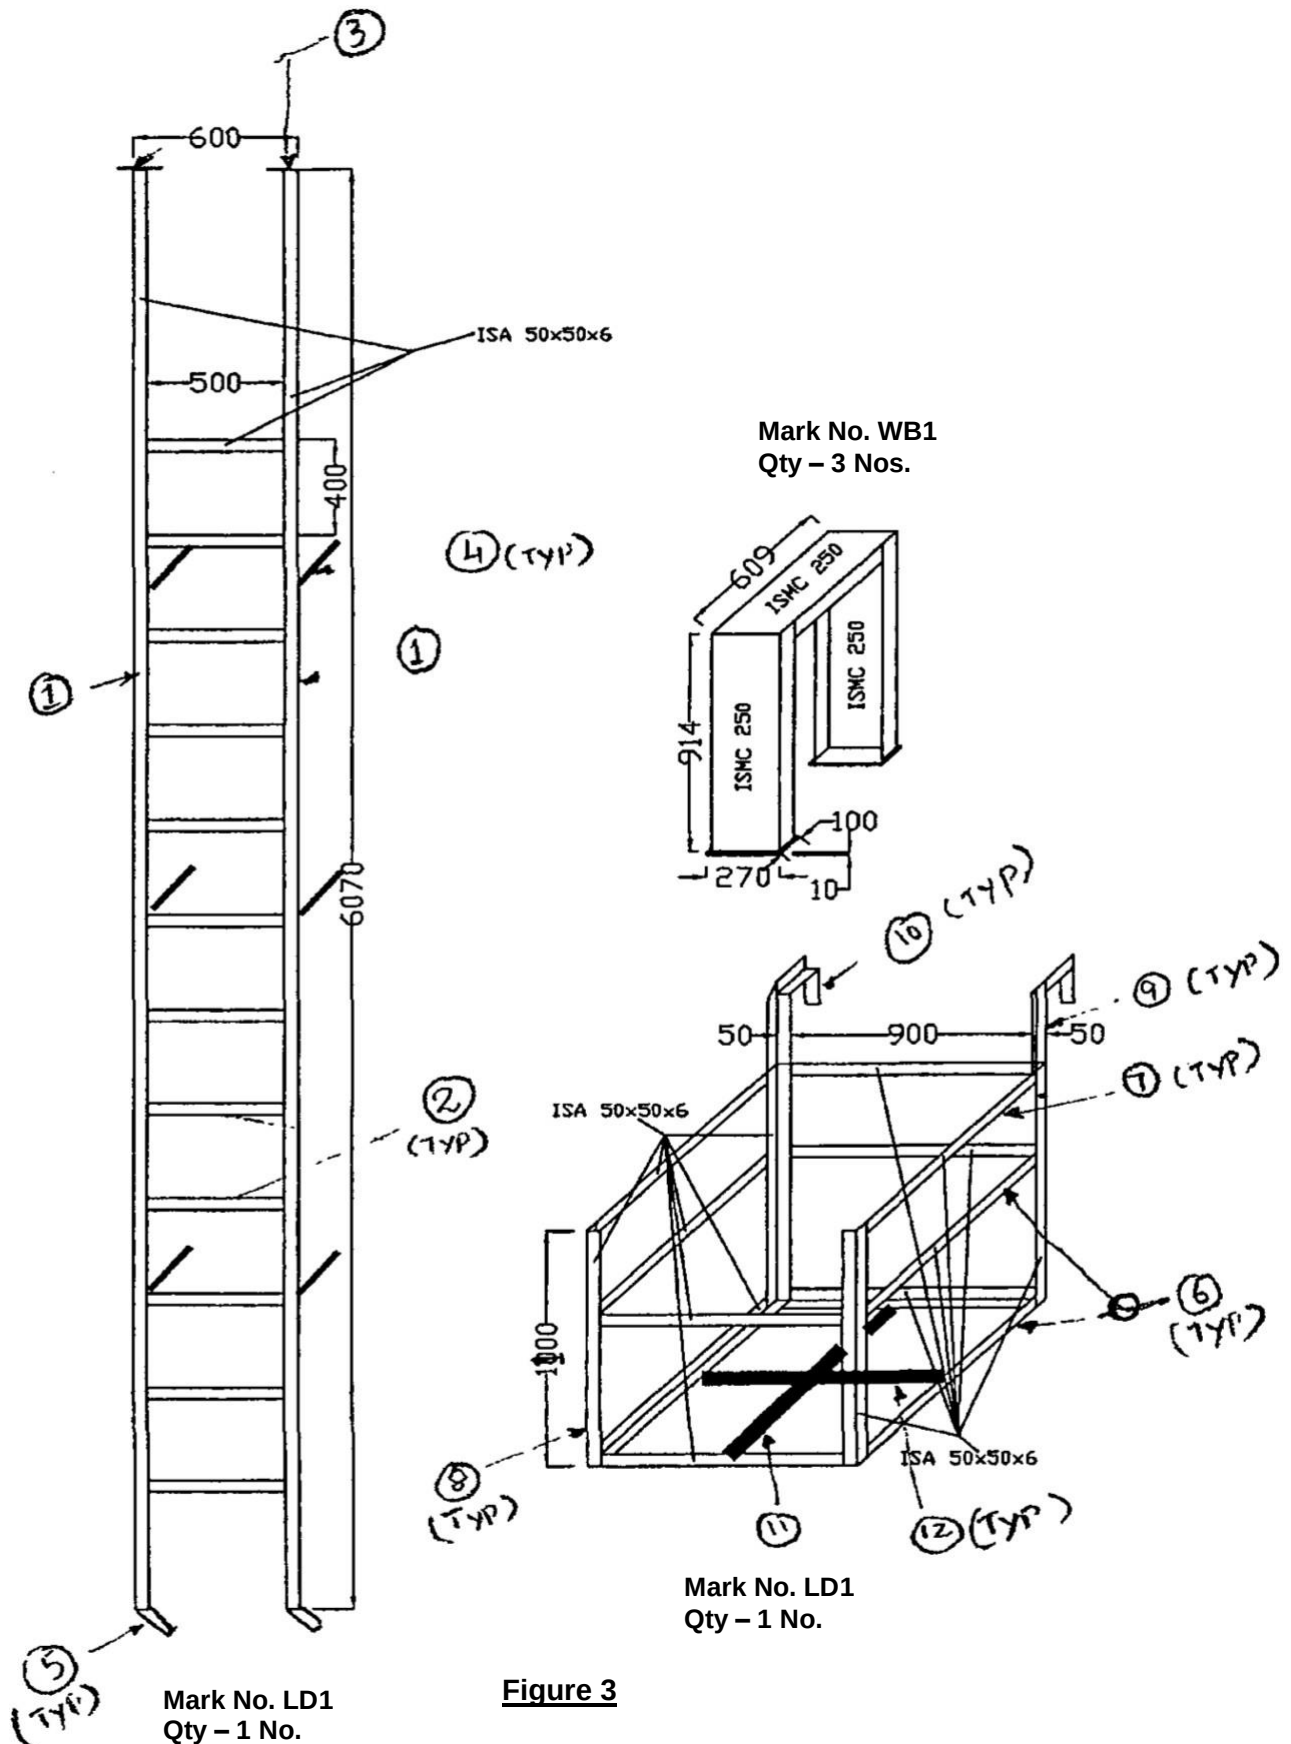


Figure 3

Vertigo Test Structure Specifications

Page 4 of 6

Figure 4

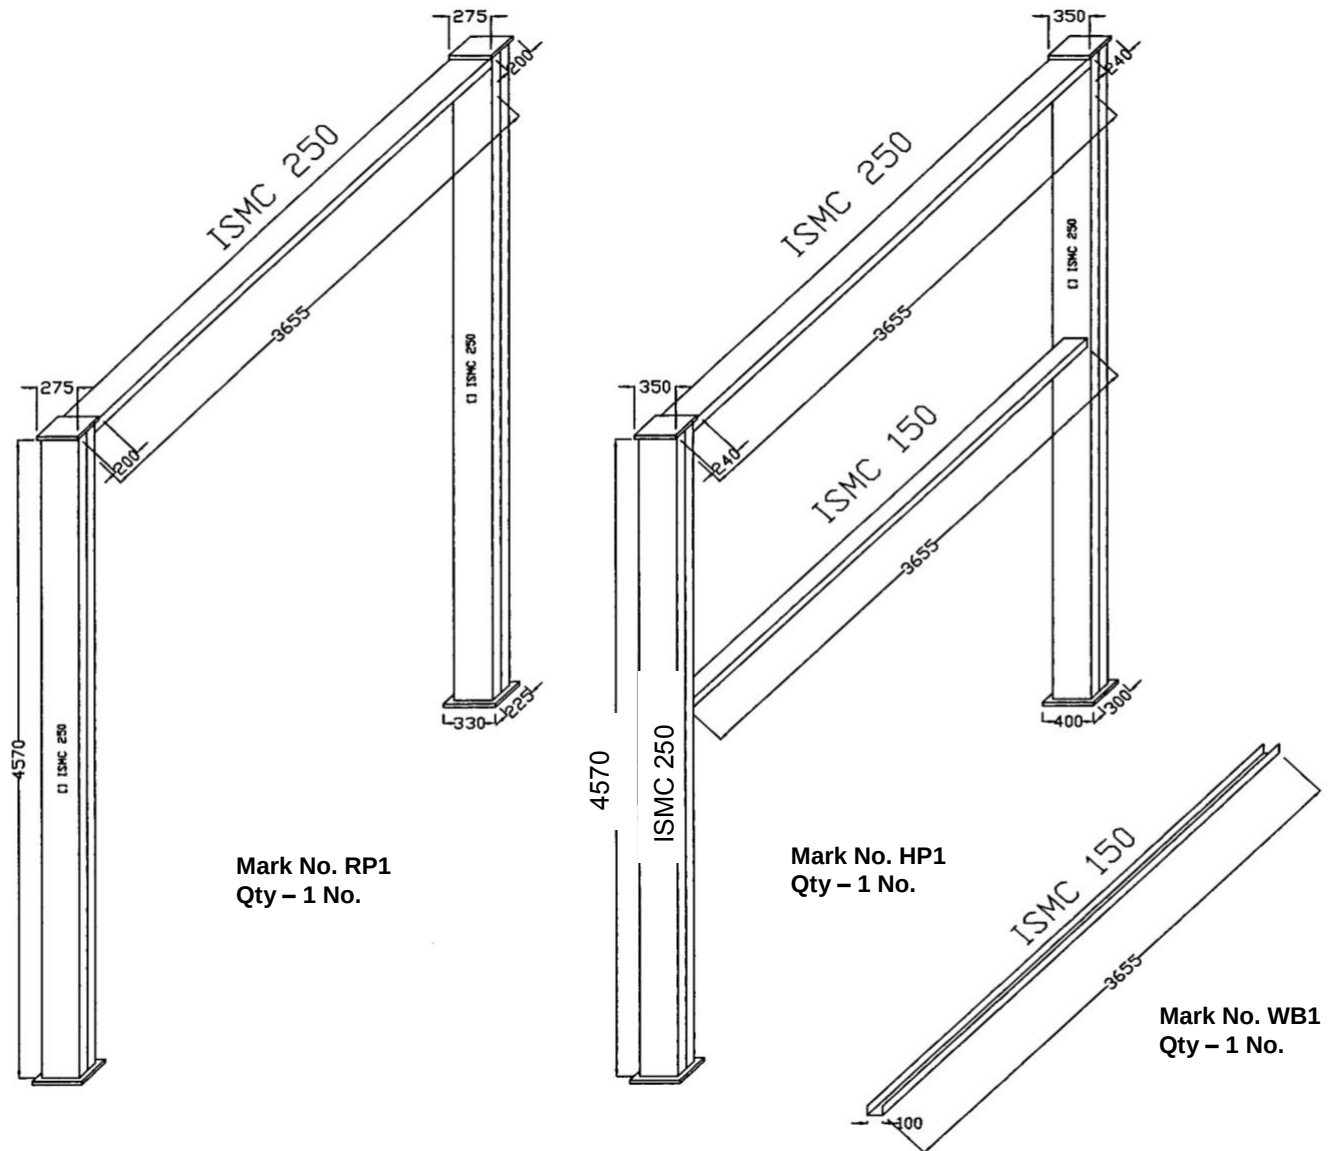

Pic-1: Actual Photo of a Typical Vertigo Test



Vertigo Test Structure Specifications

Table 2: BOM FOR HEIGHT WORK INDUCTION TRAINING MODULE

Sl. No.	Description	Width (mm)	Length (mm)	Qty (No's)	Unit Wt (Kgs)	Total Wt. (Kgs)
MKD NO. WB1						
1	ISMC250		609	3	34.20	62.483
2	ISMC250		914	6	34.20	187.553
3	ISMC100		3655	1	9.56	34.942
4	PL10	100	270	6	78.50	12.717
			Total Weight (Kgs)			297.695
MKD NO. RP1						
1	ISMC250		4570	4	34.20	625.176
2	ISMC250		3655	1	34.20	125.001
3	PL25	225	330	2	196.25	29.143
4	PL25	200	275	2	196.25	21.588
			Total Weight (Kgs)			800.908
MKD NO. HP1						
1	ISMC250		4570	4	34.20	625.176
2	ISMC250		3655	1	34.20	125.001
3	ISMC150		3655	1	16.80	61.404
4	PL25	300	400	2	196.25	47.100
5	PL25	240	350	2	196.25	32.970
			Total Weight (Kgs)			891.651
MKD NO. LD1						
1	ISA50X50X6		6070	2	4.50	54.630
2	ISA50X50X6		500	12	4.50	27.000
3	PL12	75	75	2	94.20	1.060
4	ISA50X50X6		300	6	4.50	8.100
5	ISA50X50X6		255	2	4.50	2.295
6	ISA50X50X6		1000	8	4.50	36.000
7	ISA50X50X6		910	3	4.50	12.285
8	ISA50X50X6		1100	4	4.50	19.800
9	ISA50X50X6		650	2	4.50	5.850
10	ISA50X50X6		350	2	4.50	3.150
11	PL8	75	900	1	62.80	4.239
12	PL8	75	410	2	62.80	3.862
			Weight (Kgs)			178.271
			Total Weight (Kgs)			2168.525



Vertigo Test Structure Specifications

Page 6 of 6

A. Test Procedure / Guidelines

Fear of height may be physiological or psychological. Therefore, to rule out any possibility of physiological factor, detailed medical check-up of workers is carried out before vertigo test. Medical check-up of workers includes the following:

history of past illnesses (like epilepsy, drug allergy, diabetics/ hypertension, unconsciousness etc.), general physical examination (like height, weight, BMI, build and nourishment etc.), measurement of pulse rate, Blood Pressure, respiratory rate.

After this check-up, those who are found suitable for height work by examining doctor, are allowed to undergo vertigo test.

During this health check-up, psychology of workers is also studied. If any worker finds it extremely difficult/ frightening to climb the monkey ladder & walk on the beam, during/after performing vertigo test or even before performing, then he is treated as disqualified.

As per standard, during vertigo test, worker is allowed to climb on a foundation through monkey ladder, walk on a beam, then steps down at the other end of beam, through monkey ladder. Height of the beam should be at least six feet from ground level. All necessary safety precautions are taken during this test. Worker has to wear full body harness with double lanyard. A horizontal lifeline is run parallel to the beam and worker has to put his lanyards into the lifeline. Additionally, a safety net is also put below the beam for rescue of the victim in case of a fall from beam.

Following activities are generally carried during testing:

1. Walking Bench Training:

- a. Person should walk over the channel. He should maintain balance & walk without much problem.
- b. If the person has problem to balances himself on repeated chances, he may be having flat foot or some other problem. So, he may not be fit for height work.

2. Rope Climb Training:

Person should be able to climb the rope up to the top channel for ensuring that in case of fall, a person hanging on the safety harness, will be able to safely climb back to the platform within minimum time period before the safety harness start breaking down under the load.

3. Height Work Training:

Person should walk freely on the middle channel while holding the top channel with the help of safety harness.

4. Ladder for Vertical fall arrestor Training:

Vertical fall arrestor rope is fixed from top to bottom of the ladder. It will ensure:

- Usage of vertical fall arrestor.
- Usage of two lanyards of a safety harness.
- Ensure 3-point contact on the ladder while climb.

5. Chair for work at height Training:

- Climb though vertical ladder with two lanyard ropes.
- Hooking of two lanyard ropes to life line. With this safe arrangement, he can walk to chair.
- Sits in the chair safely, comes out & walks back to the vertical ladder & come down from vertical ladder. After completion of vertigo test, blood pressure of worker is again measured. If it is not within acceptable limits for any worker, concerned worker is denied height pass.

Only those who pass the above training are fit for height work.

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)	Doc. No.: HSEP:14
		Rev.: 01
		Date:
		Page 167 of 170

Safety Park Requirements		
Sl. No.	Training room (capacity 40 persons)	Qty.
1	Class room chair	25
2	Office Table	3
3	Rolling chair	3
4	Almirah	1
5	Visitor chair	10
6	Drawer	2
7	Single bed	1
8	Mattress	1
9	Projector	1
10	Projector screen	1
11	Sound speakers	1
12	Desktop Computer	3
13	Printer	1
14	White Board	1
15	Marker	5
16	Duster	1
17	Door Mat	9
18	Dustbin (Small + BIG)	7+1
19	Mannequin	1
20	Helmet	1
21	Face Shield	1
22	Safety Goggle	1
23	Welding shield	1
24	Ear Muff	1
25	Ear Plug	1
26	Nose Mask	1
27	Breathing Apparatus	1
28	Hand Gloves (Cotton)	1
29	Hand Gloves for Electrician (Rubber)	1
30	Hand gloves Rubber	1
31	Hand Gloves Lather	1
32	Construction Safety Uniform (Boiler Suit)	1
33	Welding Apron	1
34	Safety Shoes	1
35	Leg Guard for Welder	1
36	Poster for Occupational Disease like Pneumoconosis, silicosis etc.	1

37	Gum Boot	1
38	Full Body Harness	1
39	8 MM Wire rope for life line. Length 20 Feet (FT).	1
40	Safety Net for man & materials. Size 15 FT X 15FT.	1
41	Monkey ladder 15 FT.	1
45	Fire Extinguisher All types(DCP,CO2 & Foam)	1
46	Bed Sheet	1
47	Pillow	1
48	Curtain	12
49	curtain fittings	12
50	AC (1.5 TON)	3
51	AC (2 TON)	2
52	Rope pully.	1
53	PP Rope for pully 20 MTR.	
54	Ladder Clamps	6
55	Aluminum ladder 6 MTR.	1
56	Carry Bag	
57	Scaffolding all Materials for 5 Mtr. Height like Scaffolding tubes, Sole plate, base plate, Right angle clamps, Swivel clamps, beam clamps, Joint box/joint pin, toe guard/board,	

RECORD OF REVISION

Clause No.	Rev. No.	Brief Description of Revision	Date
All	00	New Procedure Introduced	25.04.2019
All	01	OCPs-60, 61& 62 introduced, New formats introduced	08.05.2020



Health, Safety & Environment, Power Sector Headquarters

Bharat Heavy Electricals Limited

Regd. Office: BHEL House, Siri Fort, New Delhi – 110049, India

Website: www.bhel.com



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61A

Rev. No.: 00

Rev. Date: 27.04.2020

Page 1 of 3

OCP No. : 61A

Prevention of COVID-19 Infection in Labor Colony

Purpose	➤ To ensure necessary precautions in Labor Colony in order to prevent spread of Infectious diseases like COVID-19 among residents	Scope	PS Regions
Applicability	➤ This SOP applies to labor colonies at project sites.		
Responsibility	Concerned Site In-charge / Site HSE Head/Package Head		
Performance Criteria	Number of cases of violations from these guidelines. Violations must be recorded and compliances be done for the same immediately/ within a day		
References	➤ HSEOCP:61 and all References therein This OCP is an Annexure to HSEOCP 61)		

Procedures and Controls

S No	Activity	Responsibility
1	General a. Norms for social distancing, training/ awareness, face masks, disinfection, sanitization, gate entry, quarantine, medical, action in case of suspect COVID cases etc. as indicated in HSEOCP:61, Corporate HSE Circular BHEL:CO: SOP: COVID-19 : 01 and Govt. guidelines b. Each labor colony will be secured preferably by a boundary wall and gate, manned by a guard. Only workers with valid ID cards to be let inside c. New workers should not be allowed to enter colony without health checkup.	Agency, BHEL
2	Precautions for Living Rooms & Common Areas in Labor Colony a. Spacing of minimum 2 meters between living areas of workers inside a room may be maintained. Preferably, the living area of each worker may be partitioned using sheet of cloth, plastic etc. b. Rooms to be properly ventilated as far as possible c. Sanitation to be given prime importance and personal hygiene to be promoted d. Outside every common facility, eg. Toilet, washroom, food hall/ canteen etc., provision of washbasin with water (flowing water preferably) and soap (preferably liquid soap) to be ensured e. Round markers with chalk at 1-2 meter distance to prevent crowding at each common facility like toilet, washroom, drinking water point, washing area, mess/ canteen etc. f. Staggered shift planning – In case the capacity of infrastructure and facilities like toilets, washrooms, canteen etc. is not sufficient, workers can be assigned staggered shifts so as to not overwhelm the facilities. A group can depart before the next group starts to get ready. Detailed assessment and planning in this regard is to be carried out by each concerned agency g. Face masks shall be worn by everyone inside the colony premises (Refer 1(a)). h. Sanitisation/Disinfection of all areas to be carried out regularly (Refer 1(a)). i. Spitting of Pan. Gutkha etc. inside the colony and urinating etc. outside the toilets to be strictly avoided j. Regular visits by Doctors to the labor colony can be arranged on non-working day for check-up of all workers k. Banning animals from labor colony: As per recent reports, Coronavirus is also spreading among animals. Hence, all animals to preferably be expelled from labour colony. l. Necessary social distancing to be ensured during cooking and taking food. Separate water bottles, utensils etc to be preferably maintained by each worker to prevent infection. Common cooking to be preferably avoided. In case necessary, adequate care to be taken especially w.r.t. health and well-being of the cook and maintaining proper distance during serving food/ tea etc.	Agency/ BHEL



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61A

Rev. No.: 00

Rev. Date: 27.04.2020

Page 2 of 3

OCP No. : 61A

Prevention of COVID-19 Infection in Labor Colony

- m. Identification of “COVID Wardens” (CWs) by each agency for maintaining the following:
 - i. Keeping an eye on the health of workers and report any suspected cases of fever, coughing etc. to the management
 - ii. Keeping an eye on the social distancing measures in the labor colony and report any non-conformances to the management.
 - iii. Educate the workers about social distancing and COVID prevention measures.
- n. **Training/ Awareness regarding COVID-19**
 - i. Workers to be instructed to maintain social distancing of minimum 1 m at all time
 - ii. **Posters on COVID-19:** Sufficient Posters on COVID-19 to be ensured across the labor colony in languages understood by most workers.
 - iii. All workers to be instructed to inform any suspected cases of illness (individual or others) to an emergency contact number of CW, The emergency contact numbers and CW contact numbers to be displayed at prominent locations
- o. **Commute to/ from Labor Colony**
 - i. Social distancing precautions and masks to be strictly ensured during commute between labor colony and site. Govt. guidelines on occupancy of the vehicles to be followed.
 - ii. In case vehicles are used, concerned drivers to be instructed to keep a watch on the occupants following the necessary social distancing measures and wearing masks.
- p. **Inspection & Review**
 - i. Daily Inspection by concerned COVID Wardens and reporting to Agency
 - ii. Regular inspection by Agency & BHEL

Note:

1. Other precautions as deemed necessary by concerned sites may be ensured in order to prevent Coronavirus Infections. This OCP suggests minimum requirements. However, Sites may consider alternative actions based on feasibility and circumstances, while adhering to GOI/District Administration/Local Authority guidelines, issued from time to time for social distancing, sanitation, use of face masks, etc
2. Responsibility assignments are only indicative – to be decided at Site Level



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61A

Rev. No.: 00

Rev. Date: 27.04.2020

Page 3 of 3

OCP No. : 61A

Prevention of COVID-19 Infection in Labor Colony

Site to follow all the general safety precautions as per this OCP.

In addition, relevant records pertaining to actions taken to be prepared and kept.

Records:

Record Title	Record No.	Location	Responsibility	Retention Period

Verification, Corrective and Preventive Action:

HOD / Site In-charge shall ensure effective implementation of the above procedure. In case of any deviation, shall take suitable corrective and preventive action.

Revision History

Revision Date	Revision No.	Old Text	New Text	Reason	Revised by
27/04/2020	00	-	-	First Issue	PSHQ-HSE



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 1 of 13

OCP No. : 61


Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

Purpose	➤ To resume work in a safe manner after Lock down due to COVID-19 Outbreak ➤ To ensure health & safety of personnel and prevention of infection during operations ➤ To ensure HSE Management & Control during operations	Scope	PS Regions
Background	➤ The purpose of this procedure is to resume construction works at BHEL project sites in the event of 'Construction activities' being permitted by the Government/District Administration/Statutory Authorities. ➤ By following this OCP the chain of corona spread will largely be contained and works can be done safely. ➤ All precautionary measures are to be ensured at site and labor colonies so that the labor force feels safe and secure at work place and act in a productive manner. ➤ This OCP also lays down guidelines to handle cases of infection		
Applicability	➤ This OCP applies to all BHEL employees and its subcontractors working at project sites. ➤ It also covers guidelines for medical personnel, security personnel, visitors and others		
Responsibility	Concerned Site In-charge / Site HSE Head/Package Head		
Performance Criteria	Number of cases of violations from these guidelines. All violations must be recorded and compliance for the same immediately/ within day		
References	➤ Corporate HSE Circular BHEL:CO: SOP: COVID-19 : 01 ➤ Corporate Guidelines regarding disinfection for Prevention of COVID-19 in BHEL Offices, Townships, Hospitals, Factories and other common places (No. AA:HR:MR 1 (C) dated 20-03-2020) ➤ OHSAS : 18001 , ISO : 14001:2015, ISO 45001:2018 ➤ ICMR & WHO Guidelines for COVID 19 ➤ Govt. of India Guidelines being issued from time to time ➤ Guidelines issued by National Centre for Disease Control and other agencies of Govt. of India ➤ WHO Guidelines being issued from time to time		


Prepared by	Reviewed by	Approved By
Task Force: Rohit Kumar, SM/ PSHQ-HSE Nitesh K. Meena, DM/ PSNR-HSE Saswajeet Raut, SE/PSER-HSE Navin Sadh, SE/ PSWR-HSE Sandeep Dalal, SE/ PSSR-HSE	HSE Heads/ PS-Regions: S. C. Meena, AGM/ PSNR B Tirkey, AGM/ PSER R. O. Jadhao, AGM/ PSWR Mukesh Shrivastava, AGM/ PSSR	Head/ HSE, PSHQ: Santosh Nair, GM

General PPEs & Precautions

Maintain Social Distance of at least 1 meter **Minimum (more the better)**

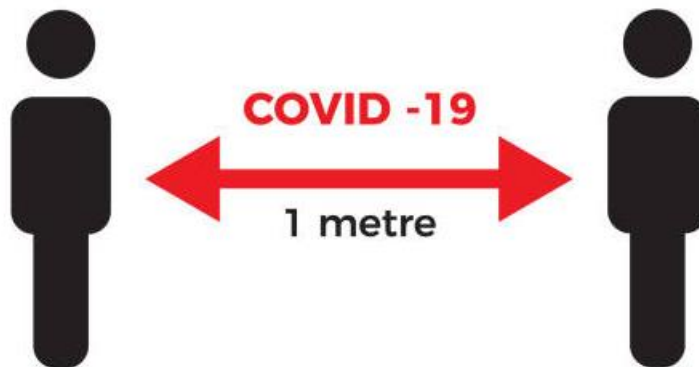

Precautions at all times is necessary. Even a single lapse can lead to infection

	Face shield/ mask must be worn by all at all times and disposed/ cleaned properly		Protective clothing must be worn		Protective gloves as identified in Safety Data Sheet
	Appropriate footwear with substantial uppers must be worn		Mandatory requirements are specified and must be followed. Report any accidents.		
	Spray to disinfect personal items/ areas		Spray to disinfect public places/ infrastructures/ tools etc.	Strictly No Shaking Hands	
	Hazmat suits and special PPEs for medical personnel and other officials with more probability of coming into contact with infected		Strict security & control at Gate to avoid entry into site/office premises of infected persons and persons without necessary PPEs, unauthorized personnel, animals etc.		



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 3 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

General

1. This procedure is applicable for all personnel working at Project Site, including staff, workers, officials, medical and security personnel, cleaners, housekeeping staff etc. It also includes visitors including drivers, cleaners, doctors, nurses, etc. entering the site premises
2. These are broad guidelines that may be followed in order to ensure the purpose of this OCP is met.
3. The procedure refers specifically to COVID-19 disease caused by SARS-CoV-2 Virus, but is applicable to similar highly infectious respiratory illnesses as well
4. This procedure is branches out of Corporate HSE Circular **BHEL: CO: SOP: COVID-19: 01 – ‘Standard Operation Procedure for Work Resumption after Lockdown’**. In case of any ambiguity & duplicity, Corporate HSE Circular & Guidelines and Govt. guidelines to be followed
5. This procedure is necessary to ensure continuation of business operations in order to avoid mandatory lockdown due to an infection. All precautions to be taken seriously due to the contagiousness and mortality rate of this disease. Even a slight lapse can lead to infections and shut down of site operations for the mandatory notified period
6. The physical distancing guidelines of minimum 1 m indicated in this document to be reviewed in line with latest Govt. guidelines and ensured appropriately

Detailed Procedures & Controls are given below

Procedures and Controls		
S No	Activity	Responsibility
1	<u>Deployment/ Nomination of COVID Marshall</u> a. BHEL and Agencies shall nominate COVID Marshalls, who will be responsible for monitoring the COVID prevention measures and apprising management on the same. b. Every agency shall nominate COVID Marshall, who shall report to BHEL COVID Marshall c. BHEL COVID Marshall shall be nominated by Site In-charge in consultation with Site HSE Head. d. BHEL COVID Marshall shall be the Nodal COVID Marshall for the site, and having overall responsibility.	Agency, BHEL
2	<u>Directions for Newly Joining Workers/ Officials</u> a. Mandatory health check-up for every worker/ official joining the site b. An undertaking to be submitted by every worker/ official which shall specify if he/she had been in contact with a Covid-19 positive case, and other health-related details (as per Format HSEOCP61-F01) c. All newly joining workers/ officials, shall follow the applicable procedures/ guidelines as laid out by Govt./ statutory authorities pertaining to quarantine, prior to joining work	Agency, BHEL
3	<u>Routine HSE Management Activities During COVID-19</u> a. Due to the stress on existing medical facilities due to COVID-19 pandemic, it is imperative to take utmost precautions and avoid any incidents during operations. b. All activities to be carried out in safest manner possible with all necessary precautions. c. All activities to be carried out using least amount of paperwork and physical proximity as far as possible. The methodology to issue Permit etc. can be decided by Site Management. All necessary precautions before starting activity to be ensured and regularly monitored by concerned execution and HSE Team.	Agency, BHEL



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 4 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

	d. As far as possible, meetings & classroom trainings to be avoided. Essential meetings can be carried out by following the relevant guidelines e. HSE Observer App to be used to monitor HSE Activities and follow up with agencies for closure of non-conformities. Follow up can also be carried out through Phone/ Video Call etc. f. Apart from monitoring of HSE requirements, monitoring of COVID-19 precautions by workers and BHEL and Agency Officials also to be carried out	
4	<u>Strict Control at Gates</u> a. Strict Control at the Gate/ Banning Entry to Anyone Not Wearing Masks i. Security personnel at the gate may erect a barricade preferably approx. 10 meters from the gate and only allow personnel who are wearing proper masks inside. ii. Public address system may be used to warn any non-compliant visitors iii. Near entry gate, round markers at minimum 1-meter distance to be ensured so that distancing is ensured iv. A hand-wash or hand sanitiser facility is preferable at the gate to allow entry after hand wash or hand sanitisation. These are also to be provided at key locations to enable hand wash / hand sanitisation before starting work, before eating, etc. v. Gutkha, Paan, tobacco etc. to be banned from the site. Spitting to be strictly prohibited. vi. Screening at Gate with Contactless Thermometer & Action on Suspected Cases 1) Security Personnel at the Gate to screen each person entering the premises using a non-contact infrared thermometer, which is duly serial numbered and calibrated. 2) In case any site worker/ official is found to have fever more than 99 Degrees Fahrenheit or found coughing/ sneezing, he/she may be advised rest till recovery and entry to be permitted after obtaining clearance from medical officer/assistance/attendants. b. Any parcel/courier person should be stopped at gate only. Parcel to be collected from gate by concerned person preferably with provision of Special Box (wood/metal/plastic or the like) that can be sanitized daily. A provision of drop box at front of BHEL site office may also be deployed for receiving document like letter/invoice, etc. Parcels to be properly sanitized prior to opening. c. Any construction material received at site, unless properly sanitized, to be kept undisturbed for at least 3 days and to be used only after that period. d. Don't allow any new vehicle without concerned BHEL engineer permission. e. Ensure that number of persons coming inside and going outside is matching, agency wise. f. Visitor entry in site office to be avoided as far as possible.	Security, Agency, BHEL
5	<u>Maintaining Strict Social Distancing during site/office activities – minimum 1 meter distance between any two personnel to be Enforced Strictly</u> a. During meetings, classroom training programmes like induction training and on-the job training, toolbox talks and other gatherings, following precautions may be ensured: i. Preferably, such meetings to be avoided and communication carried out through other means (email, phone, pamphlets etc.) ii. At door, hand sanitizer or soap and water to be ensured for sanitizing hands during entry & exit by each individual iii. Only limited number of personnel to be called in training/ meeting, so as to ensure distance of minimum 1 meters between two participants iv. Each participant to wear mask	Agency/ BHEL



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 5 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

- v. In case any individual is symptomatic/ coughing/ sneezing, he/ she may be taken to quarantine area by the medical/ first aid personnel, and medical assistance sought from specialized hospital, etc
- vi. Persons may be allowed to attend the induction training/ meeting only after temperature screening if felt necessary.
- b. **Social Distancing During Toolbox Talks**
During Toolbox Talks, minimum 1 meter distance between any two workers to be ensured
- c. **During site execution activities:**
 - i. For all site execution activities, social distancing is to be maintained. In case this is not possible due to nature of work, speciality of work, etc, ensure sensitisation of the labour/staff involved and use of appropriate PPEs, especially mandatory face mask. In any case, close working to be allowed only in special circumstances and ensuring these activities are preferably time staggered to the extent possible
 - ii. Ensure hand wash / hand sanitisation facility at key places and these are topped up regularly
- d. **In office premises:**
 - i. Sharing of items like pens, water bottles etc. in office premises to be avoided
 - ii. Seating arrangement to be ensured to ensure minimum 1 meter distance
 - iii. Doors preferably to be in open condition to avoid contact
 - iv. All common touch points to be regularly disinfected.

6

Mandatory Face Masks for Everyone at All Times

- a. Face masks, and other necessary PPEs to be provided to all workers as per guidelines of Govt/ statutory authorities
- b. Those responsible for sanitation and cleaning of areas to be given coveralls
- c. **The Govt of India advisory available at following link gives details on how to prepare, use and clean such masks.**
<https://www.mohfw.gov.in/pdf/Advisory&ManualonuseofHomemadeProtectiveCoverforFace&Mouth.pdf>
 - i. The workmen/staff may use home-made masks/ "gamchha" (गमछा) provided they are used effectively and constantly.
 - ii. All site personnel to wear masks as specified at all times except possibly while having lunch/ tea. During that period, a distance of minimum **2 meters** to be maintained between two persons.
 - iii. Minimum two masks to be ensured for each person – one can be used and other washed. Daily washing with detergent is mandatory
 - iv. Strict directions for usage, washing of mask to be given to workers and officials. Masks are not to be touched from outside, and are to be put in soap solution on reaching residential quarters.
 - v. There must not be a sharing of face covers and a face cover must be used by only one individual
 - vi. Regular awareness by way of posters or daily briefing to be provided regarding correct usage, handling, washing, disposal etc of face masks/gamchhas/cloth etc

Concerned Individual/ Supervisor



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 6 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

d. Types of Masks and Use case scenarios

i. Homemade/ Reusable Face Covers:

- 1) Such home/ self-made face covers may be preferably used by all personnel. In case they can arrange better masks, same may be allowed.
- 2) In any case, no person to be permitted in site premises without a mask.

ii. Triple Layer Surgical Masks

- 1) These are disposable masks to be given to visitors/ used by workers and officials as per requirement.

iii. N95 Masks

- 1) Medical, security, and other officials, who come into contact with large number of people during the course of the day to be given N95 Masks
- 2) In addition, infected personnel and who are suspected of infection to use specialized masks as indicated by doctor

e. Minimum two sets of masks to be ensured with everyone so that one can be used while other is washed

7

Mask cleaning/ disposal

The Govt of India guidelines in above link also give details on how to wash and dispose the masks. Same to be followed.

In addition,

- a. For re-usable masks, in labor colony, separate area for cleaning masks to be identified, wherein all workers to wash the masks using detergent and water
- b. Cleaning of masks and availability of backup to be ensured by officials as well.
- c. **Safe disposal of Masks, Infected clothing, items etc.**
 - i. Each location to have separate bin for collecting used disposable masks and possibly infected items.
 - ii. All these bins to be collected daily and disposed of by trained staff wearing proper PPEs

Concerned Individual, Agency, BHEL

8

Provision of Food & Refreshments

- a. **Workers:** Tea for workers may be avoided. In case necessary, strict social distancing to be ensured, besides hand washing. It is preferable to let the labour bring their own cups/glasses or else use of disposable paper based cups to be encouraged
 - i. Tea cups may be arranged by the server and picked by worker in contactless manner.
 - ii. Food for workers may be served in packets.
 - iii. **Preparation:** Common food preparation to be carried out under strict hygiene with cooks wearing gloves and masks. A guard specifically to monitor the health of the cooks may be deployed, who can warn the management regarding any possible health issues.
 - iv. At tea/ food distribution area, social distancing norms to be ensured
- b. **Officials:** As far as possible, home cooked food to be preferred. In case not possible, packed food to be delivered at each seat, prepared in hygienic fashion as above

Agency/ BHEL



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 7 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

9	<u>General Precautions in Site Areas</u> a. Workers to be instructed to maintain social distancing of minimum 1 m at all time (tool box meeting, tea time lunch time, gate entry time and drinking/service water area) b. Daily Tool Box Meeting to also include awareness about COVID 19 and precautionary measures to prevent spread. c. No other group meeting to be conducted preferably. d. Contractor to keep their working area clean and hygienic. Disinfectant spray/powders to be applied daily at common places (eating place, drinking water area, service water area and transport vehicles) e. All the workers during resting also, to maintain physical distance of at least 1 meter. Subcontractor has to disinfect the rest shelter at regular intervals. f. Subcontractor may keep sanitizer/hand wash in sufficient numbers at all common points. g. All hanging load must be inspected before starting work. A committee can be formed by each contractor to ensure all these pre start up inspections are done and submit the report to BHEL. h. Sanitizer may be kept at stair case entrance, lift entry point etc. Lifts to be avoided to the extent possible, and staircases preferred i. If any worker is found with COVID-19 symptom, he/she has to be sent to quarantine chamber immediately by medical personnel and medical assistance sought. Contractor to maintain extra room to keep person with symptom in quarantine. j. Workers may be advised to keep separate water bottles. Common water bottles/mugs/glasses to be preferably avoided. k. Contact Biometric attendance system is strictly prohibited till such advisory is in place. l. Regular disinfection of all Areas, Equipment and facilities i. Each agency to prepare the disinfecting plan and act accordingly. ii. A dedicated disinfectant gang to be identified for the task by each agency. The disinfectant gang to be provided full body suits for the task. iii. All areas (including office premises, site areas, chairs, tables, furniture etc.), tools & equipment to preferably be disinfected by dedicated gang every day before resumption of work. iv. Common touch points like handrails, lift buttons, door/window knobs or handles, vehicle door handles, taps, conference room & dining hall tables/chairs, common sofas/chairs, visitor sofa/chairs, files & folders, etc to preferably be disinfected regularly at frequent intervals every day. v. Pool vehicles, to be disinfected after every use. Social distancing to be maintained inside the common pool vehicles as per Govt./ statutory body guidelines. m. Provision of Disinfectant Spraying Machine and Disinfectant Chemical i. Provision of disinfectant machine may be deployed for faster disinfection of surfaces, premises, offices etc. The indicative composition of disinfectant chemicals is given in Corp HR Circular No. AA:HR:MR 1 (C) dated 20-03-2020 n. Disinfecting the operator/driver touch points of Vehicles/cranes, T&Ps etc. Disinfection to also be carried out for all Cranes, Vehicles, Equipment, consoles, T&Ps etc. which come into contact with operating personnel. o. Mandatory Disinfecting of all PPEs, Tools & Items on daily basis All PPEs, Tools & Items to be disinfected mandatorily before use/ issue and also those in stores	Agency/ BHEL



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 8 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

	p. Posters on COVID-19 q. Sufficient Posters on COVID-19 to be ensured across the site in languages understood by most workers. Contractor to display precautionary measures, 'Do's and Don'ts' at prominent places in languages spoken by their workers. r. Provision of Hand-Hygiene at Site 1) In order to ensure hand-hygiene at site, wash basins with sufficient flowing water (going to drain after washing – not re-usable) to be installed at various locations. Here flowing water means water flowing from any tap or poured from tanker/sump/tank etc. Dipping hands into water in buckets/tanks/sumps etc for the purpose of washing is strictly prohibited as it is counter-productive. 2) Brief guidelines for hand washing are as below: - Soap to be provided at each wash basin and replenished regularly. - Washing with soap for at least 20 seconds is recommended. - As a general guideline, for every 100 workers, 1 wash-basin may be provided at site areas. - Close queue to be avoided near wash-basins and 1-meter distance to be maintained. Round markers at 1-meter distance can be ensured as guidance s. Penalty - To ensure compliance penalty may be imposed in line with district administration norms or higher for not wearing mask or violating social distancing guidelines. - Concerned subcontractor may also be warned of stricter penalties in case of continued negligence	
10	<u>Labor Colony</u> Following guidelines for COVID Prevention in labor colony may be followed: - All relevant guidelines in Corporate HSE Circular BHEL:CO: SOP : COVID-19 : 01 to be followed - HSEOCP No. 61A for Labor Colony. - Any other guidelines issued by applicable Govt/ Statutory authorities	Agency/ BHEL
11	<u>Provision of Quarantine Chambers</u> - In labor colony/ near site, a temporary home quarantine/ isolation chamber may be set up to keep possible infected cases (with cough, cold, fever or other symptoms) until further medical help arrives. Quarantine chamber should be away from labor colony tenements. - Similar arrangement of quarantine chambers may be set up at Site premises. - Necessary arrangements for quarantine shall be as per Govt./ statutory body guidelines	Agency/ BHEL
12	<u>Action in case any individual is suspected of COVID infection or showing symptoms</u> In case any suspected COVID-19 case is found or an individual is showing symptoms like cough/ cold/ fever etc.: - Immediately alert BHEL HQ & Corporate office, Customer, Local authorities/ district administration, etc - Arrange to take the individual to the COVID testing or COVID care facility as per advise of local authorities/district administration - Sanitize and disinfect immediately all the areas where the person would have visited in the Project premises and labour colony etc.	Agency/ BHEL



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 9 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

	d. Co-operate with the local authorities in identifying and tracing individuals who might have come in close contact with the suspected person. Take immediate action as advised by the local authorities/ district administration, customer, etc including cordoning off or sealing of the area. e. Apprise BHEL offices and customer regularly.	
13	<u>Liaison with Specialty Hospitals for COVID-19</u> a. Liaison with specialty hospitals for COVID-19 test/treatment facility, for timely care to suspected individuals, and advice. b. Information regarding local authorities dealing with COVID to be maintained c. Addresses of COVID centers for possible scenarios to be maintained	BHEL
14	<u>Hazmat Suits and N95 Masks for Medical Personnel</u> Medical Personnel at site to be provided hazmat suits besides N95 masks	BHEL
15	<u>Training/ Awareness regarding COVID-19</u> All site personnel to be given inputs on COVID-19 regularly covering following broad topics: (Workers may be given Pep Talk once a month through Audio-Visual Medium and daily through toolbox talks and officials to be informed in internal meetings as and when they happen. Every meeting to begin with brief discussion on COVID-19 and need to ensure precautions like masks and social distancing). Suggested topics are given below: a. What is COVID-19 & How it spreads through coughing, sneezing and touching mucous membranes like mouth, eyes after touching infected surface b. What are the symptoms of COVID-19, namely coughing accompanied with fever and flu-like symptoms including running nose and sneezing c. The highly infectious spread, Number of infections and fatalities in the world from this disease d. Fatality rate from COVID-19 varies from 1-10% and individuals with preexisting conditions like heart diseases, diabetes, kidney & liver problems, smokers are more vulnerable to have serious effects from Coronavirus infection e. How COVID-19 infected individual can be asymptomatic, but can still infect friends and family members. Infected individual can be immune, but friends and family members can develop serious issues, so it is best to be protected to avoid problems for friends & family and especially elders f. According to studies, Coronavirus can stay on surfaces from few hours to few days, so touching of unknown surfaces to be avoided and hands washed/ sanitized frequently g. There is no cure/ vaccine for this disease so far h. Prevention is the only cure i. Best way to save oneself is to wear mask at all times and not to touch surfaces and protect oneself from infection from respiratory droplets	Agency/ BHEL
16	<u>Keeping Updated on COVID-19 in the Area/ Locality</u> Site to remain vigilant about any reported COVID-19 cases in the vicinity and take appropriate precautions/actions as advised by the local authorities/district administration	Agency/ BHEL



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 10 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

17	<u>Staggered Shifts to Avoid Contact during Commute</u> - Staggered deployment of labour/staff to be ensured to prevent accumulation of people in work areas as well as in common transport vehicles. Aim is to ensure distance of minimum 1 meter between two occupants - Drivers to also wear protective masks, preferably N95 - Proper air circulation and ventilation to be ensured in vehicles	Agency/ BHEL
18	<u>Air circulation, filtering and ventilation in Office Premises & Training Halls</u> - Air circulation to be ensured in closed areas - Well ventilated areas/rooms preferred to air conditioning, to the extent possible	Agency/ BHEL
19	<u>Guidelines to handle outside papers (eg. At Weigh bridge area, LR copies, gate passes, documents, etc.)</u> - All involved personnel to strictly maintain 1-meter distance and all social distancing and other guidelines - PPES like Face mask and gloves to be necessarily worn by the dealing person. - If required, papers to be handled using long forceps, ironed on both sides using hot iron, and then handled (with gloves) - The driver/ visitor must always wear mask and maintain distance	Agency/ BHEL
20	<u>General/ Other</u> - Shift roster should be followed, - Mass gathering meetings should not be conducted. Communications/meetings to be preferably through telephone, Mail, WhatsApp, Web-ex, etc. Face to face meetings to be preferably avoided. In case of unavoidable situations, social distancing to be maintained. - Canteen to remain closed preferably. - Committee may be formed to monitor implementation of COVID-19 prevention steps besides hygiene and fulfillment of essential needs at labor colony. - Office common areas may be sanitized daily (door handle, pantry, washrooms, common printers and other common areas) - Vehicle seats and door handle to be sanitized daily. - Vehicle arrangement to be made so as to maintain social distancing. Extra persons should not travel in the vehicle. As per Corporate HSE circular, not more than 3 personnel to travel in a single site vehicle (6 seater) at a time - After lock down period, on resumption of work, all office equipment such as PC, Printers, AC, etc. are to be disinfected and started one by one after checking for any wear & tear due to rodent acts during lockdown. Banning animals from site: As per recent reports, Coronavirus is also spreading to animals. Hence, all animals may preferably be expelled from site.	Agency/ BHEL

Note:

- Other precautions as deemed necessary by concerned sites may be ensured in order to ensure strict precautions to prevent even a single case of Coronavirus Infection
- Responsibilities are only indicative – to be decided at Site Level

	OPERATIONAL CONTROL PROCEDURE	Doc. No.: HSEOCP: 61 Rev. No.: 01 Rev. Date: 01.06.2020 Page 11 of 13
OCP No. : 61		Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

Some Useful Links

A. Internet links of Govt and other authoritative sources on COVID-19 and Coronavirus are listed below:

1. MyGov COVID-19-19 Page: <https://www.mygov.in/COVID-19/>
2. Preventive Measures (Advisory) : <https://www.mohfw.gov.in/pdf/PreventivemeasuresDOPT.pdf>
3. Guidelines for Home Quarantine: <https://www.mohfw.gov.in/pdf/Guidelinesforhomequarantine.pdf>
4. Guidelines for COVID-19 Quarantine Facilities: <https://ncdc.gov.in/WriteReadData/l892s/90542653311584546120.pdf>
5. Posters, Dos, Don'ts on COVID-19: <https://www.mohfw.gov.in/>
6. Miscellaneous guidelines and circulars: <https://www.nhp.gov.in/whatsnew>
7. Advisory for Ensuring Safe Drinking Water : <https://www.mohfw.gov.in/pdf/advisorydrinkingwaterpdf.pdf>

B. World Health Organization:

1. Infection Prevention & Control : <https://www.who.int/emergencies/diseases/novel-coronavirus-2019/technical-guidance/infection-prevention-and-control>
2. Advice for Public : <https://www.who.int/emergencies/diseases/novel-coronavirus-2019/advice-for-public>
3. Points of Entry & Mass Gatherings: <https://www.who.int/emergencies/diseases/novel-coronavirus-2019/technical-guidance/points-of-entry-and-mass-gatherings>

Coronavirus Self Declaration Form

- 1) Name:
- 2) Age:
- 3) Father's Name:
- 4) Agency:
- 5) Identification Number.....Identification Type.....
- 6) Arriving from:
- 7) Are you arriving from any COVID Hot Spots or Containment Zones? If Yes, please give details:

- 8) Have you come in contact in with relatives/ friends/ people infected, suspected or diagnosed with COVID-19 in last 21 days? If Yes, please provide your relationship with people and your last contact date with them:

- 9) Have you been advised quarantine/ isolation or undergone treatment w.r.t. COVID-19? If Yes, please provide details (date, duration, location, medical report etc.):

- 10) Please state if you have experienced/ are experiencing any of the following symptoms:

Symptom	Yes	No
i) Fever		
ii) Cough		
iii) Shortness of Breath		
iv) Persistent pain in the Chest		

I acknowledge that the information I have given is accurate and complete.

Date:

Place:

Signature:



OPERATIONAL CONTROL PROCEDURE

Doc. No.: HSEOCP: 61

Rev. No.: 01

Rev. Date: 01.06.2020

Page 13 of 13

OCP No. : 61

Resumption of Construction Activities After Lock Down and Prevention of Coronavirus Infection during Site Operations

Site to follow all the general safety precautions as per this OCP.

In addition, relevant records pertaining to actions taken to be prepared and kept.

Records:

Record Title	Record No.	Location	Responsibility	Retention Period

Verification, Corrective and Preventive Action:

HOD / Site In-charge shall ensure effective implementation of the above procedure. In case of any deviation, shall take suitable corrective and preventive action.

Revision History

Revision Date	Revision No.	Old Text	New Text	Reason	Revised by
18/04/2020	00	-	-	First Issue	As indicated on Page 1
01/06/2020	01	-	Besides general improvements/ corrections, modifications as below: Added (Other clauses shifted by 2): 1. Deployment of COVID Marshalls 2. Directions for newly Joining Workers/ Officials; Addition of Format F1 Edited: 4. Construction material, unless sanitized to be kept undisturbed for 3 days 6. Sanitization staff to be given coveralls 10. Reference to OCP 61A for COVID Prevention in labor colony added	New Govt. guidelines/ general improvements	PSHQ-HSE

FORMS & PROCEDURES

INDEX

SN	Description	Form No	Remarks
1.0	Forms		
1.1	Offer forwarding Letter/Submission of Tender	F-1 (Rev 00)	
1.2	Declaration by Authorised Signatory	F-2 (Rev 00)	
1.3	No Deviation Certificate	F-3 (Rev 00)	
1.4	Declaration confirming knowledge about Site Conditions	F-4 (Rev 00)	
1.5	Declaration for relation in BHEL	F-5 (Rev 00)	
1.6	Non Disclosure Certificate	F-6 (Rev 00)	
1.7	Bank Account Details for E-Payment	F-7 (Rev 00)	
1.8	Form for seeking clarifications	F-8 (Rev 00)	
1.9	Capacity Evaluation of Bidder for current Tender	F-9 (Rev 00)	
1.10	Contract Agreement	F-10 (Rev 00)	
1.11	Bank Guarantee for Security Deposit	F-11 (Rev 00)	
1.12	Bank Guarantee for ~~Interest Bearing Refundable~~ Advance	F-12 (Rev 00)	
1.13	Extension of Validity of Bank Guarantee	F-13 (Rev 00)	
1.14	Monthly Plan & Review with Contractors	F-14 (Rev 00)	
1.15	Monthly Performance Evaluation of Contractor	F-15 (Rev 01)	Revised
1.16	~~Evaluation of Contractor Performance (Quarterly)~~	~~F-16 (Rev 00)~~	Deleted
1.17	Evaluation of Contractor Performance (Annual)	F-17 (Rev 01)	Under revision ##
1.18	Evaluation of Contractor Performance for the Contract (Overall)	F-18 (Rev 01)	Under revision ##

FORMS & PROCEDURES

SN	Description	Form No	Remarks
1.19	Milestone Completion Certificate	F-19 (Rev 00)	
1.20	Completion Certificate	F-20 (Rev 01)	Revised
1.21	Indemnity Bond	F-21 (Rev 00)	
1.22	Consortium Agreement	F-22 (Rev 00)	
1.23	Refund of Security Deposit	F-23 (Rev 00)	
1.24	Refund of Guarantee Money	F-24 (WAM-11)	
1.25	Power of Attorney for Submission of Tender/Signing Contract Agreement	F-25 (Rev 00)	
1.26	Analysis of Unit Rates Quoted	F-26 (Rev 00)	
1.27	RA Bill Format	WAM-6	
1.28	Final Bill Submission format with No Claim Certificate and No Demand Certificate	WAM-7	
1.29	PROFORMA FOR PERFORMANCE BANK GUARANTEE		
1.30	BANK GUARANTEE FOR SD CUM PBG BOND		
2.0	Procedures		
2.1	Procedure and Business Rules for Reverse Auction	As per Company Policy	
2.2	Integrity Pact	As per Company Policy	
3.0	Customer specific procedures		
3.1			

- BANK GUARANTEE FORMATS FOR "RELEASE OF AMOUNTS WITHHELD/ LIQUIDATED DAMAGES AMOUNT", "SUPPLY FREE ISSUE MATERIAL" & "EARNEST MONEY" IS ALSO GIVEN.

: will be released later

FORMS & PROCEDURES

Form No: F-01 (Rev 00)

OFFER FORWARDING LETTER / TENDER SUBMISSION LETTER (To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

Offer Reference No:.....

Date:.....

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : Submission of Offer against Tender Specification No:

I/We hereby offer to carry out the work detailed in the Tender Specification issued by Bharat Heavy Electricals Limited, Power Sector-....., in accordance with the terms and conditions thereof.

I/We have carefully perused the following listed documents connected with the above work and agree to abide by the same.

1. Amendments/Clarifications/Corrigenda/Errata/etc issued in respect of the Tender documents by BHEL
2. Notice Inviting Tender (NIT)
3. Price Bid
4. Technical Conditions of Contract
5. Special Conditions of Contract
6. General Conditions of Contract
7. Forms and Procedures

Should our Offer be accepted by BHEL for Award, I/we further agree to furnish 'Security Deposit' for the work as provided for in the Tender Conditions within the stipulated time as may be indicated by BHEL.

I/We further agree to execute all the works referred to in the said Tender documents upon the terms and conditions contained or referred to therein and as detailed in the appendices annexed thereto.

I/We have deposited/depositing herewith the requisite Earnest Money Deposit (EMD) as per details furnished in the Check List.

Authorised Representative of Bidder

Signature :

Name :

Address :

Place:

Date:

FORMS & PROCEDURES

Form No: F-02 (Rev 00)

DECLARATION BY AUTHORISED SIGNATORY OF BIDDER

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration by Authorised Signatory**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

I/We, hereby certify that all the information and data furnished by me with regard to the above Tender Specification are true and complete to the best of my knowledge. I have gone through the specifications, conditions, stipulations and all other pertinent issues till date, and agree to comply with the requirements and Intent of the specification.

I further certify that I am authorised to represent on behalf of my Company/Firm for the above mentioned tender and a valid Power of Attorney to this effect is also enclosed.

Yours faithfully,

(Signature, Date & Seal of Authorized
Signatory of the Bidder)

Date:

Enclosed : Power of Attorney

FORMS & PROCEDURES

Form No: F-03 (Rev 00)

NO DEVIATION CERTIFICATE

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **No Deviation Certificate**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

We hereby confirm that we have not changed/ modified/materially altered any of the tender documents as downloaded from the website/ issued by BHEL and in case of such observance at any stage, it shall be treated as null and void.

We also hereby confirm that we have neither set any Terms and Conditions and nor have we taken any deviation from the Tender conditions together with other references applicable for the above referred NIT/Tender Specification.

We further confirm our unqualified acceptance to all Terms and Conditions, unqualified compliance to Tender Conditions, Integrity Pact (if applicable) and acceptance to Reverse Auctioning process.

We confirm to have submitted offer in accordance with tender instructions and as per aforesaid references.

Thanking you,

Yours faithfully,

(Signature, date & seal of authorized
representative of the bidder)

FORMS & PROCEDURES

Form No: F-04 (Rev 00)

DECLARATION CONFIRMING KNOWLEDGE ABOUT SITE CONDITIONS

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration confirming knowledge about Site conditions**

Ref : 1) NIT/Tender Specification No:,

2) All other pertinent issues till date

I/We, _____ hereby declare and confirm that we have visited the Project Site as referred in BHEL Tender Specifications and acquired full knowledge and information about the Site conditions including Wage structure, Industrial Climate, the Law & Order and other conditions prevalent at and around the Site. We further confirm that the above information is true and correct and we shall not raise any claim of any nature due to lack of knowledge of Site conditions.

I/We, hereby offer to carry out work as detailed in above mentioned Tender Specification, in accordance with Terms & Conditions thereof.

Yours faithfully,

(Signature, Date & Seal of Authorized
Representative of the Bidder)

Date :

Place:

FORMS & PROCEDURES

Form No: F-05 (Rev 00)

DECLARATION FOR RELATION IN BHEL

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder failing which the offer of Bidder is liable to be summarily rejected)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration for relation in BHEL**

Ref : 1) NIT/Tender Specification No:,

I/We hereby submit the following information pertaining to relation/relatives of Proprietor/Partner(s)/Director(s) employed in BHEL

Tick(✓) any one as applicable:

1. The Proprietor, Partner(s), Director(s) of our Company/Firm DO NOT have any relation or relatives employed in BHEL

OR

2. The Proprietor, Partner(s), or Director(s) of our Company/Firm HAVE relation/relatives employed in BHEL and their particulars are as below:

(i)

(ii)

Signature of the Authorised Signatory

Note:

1. Attach separate sheet, if necessary.
2. If BHEL Management comes to know at a later date that the information furnished by the Bidder is false, BHEL reserves the right to take suitable action against the Bidder/Contractor.

FORMS & PROCEDURES

Form No: F-06 (Rev 00)

NON DISCLOSURE CERTIFICATE

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

NON DISCLOSURE CERTIFICATE

I/We understand that BHEL PS __ is committed to Information Security Management System as per their Information Security Policy.

Hence, I/We M/s.....
who are submitting offer for providing services to BHEL PS __ against
Tender Specification No: _____,
hereby undertake to comply with the following in line with Information
Security Policy of BHEL PS __, _____

- To maintain confidentiality of documents & information which shall be used during the execution of the Contract.
- The documents & information shall not be revealed to or shared with third party which shall not be in the business interest of BHEL PS__.

(Signature, date & seal of Authorized
Signatory of the bidder)

Date:

FORMS & PROCEDURES

Form No: F-07 (Rev 00)

BANK ACCOUNT DETAILS FOR E-PAYMENT

(To be given on Letter head of the Company /Firm of Bidder, and **ENDORSED (SIGNED & STAMPED) BY THE BANK** to enable BHEL release payments through Electronic Fund Transfer (EFT/RTGS))

1. Beneficiary Name :
2. Beneficiary Account No. :
3. Bank Name & Branch :
4. City/Place :
5. 9 digit M ICR Code of Bank Branch :
6. IFSC Code of Bank Branch :
7. Beneficiary E-mail ID :
(for payment confirmation)

NOTE: In case Bank endorsed certificate regarding above has already been submitted earlier, Kindly submit photocopy of the same

FORMS & PROCEDURES

Form No: F-08 (Rev 00)

FORMAT FOR SEEKING CLARIFICATION

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Request for Clarification**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

Sl no	Reference clause of Tender Document	Existing provision	Bidder's query	BHEL's clarification
1				
2				
3				

Yours faithfully,

(Signature, date & seal of Authorized
Representative of the Bidder)

FORMS & PROCEDURES

FORMS & PROCEDURES

Form No: F-09 (Rev 00)

CAPACITY EVALUATION OF BIDDERS FOR CURRENT TENDER

SL NO.	DESCRIPTION OF WORK (Similar to Tendered Scope)	WORK ORDER REF & DATE	CONTRACT VALUE (Rs. LACS)	CUSTOMER NAME & ADDRESS	CURRENT STATUS OF THE JOB ALONG WITH LATEST MILE STONE COMPLETED	%AGE OF WORK COMPLETED	VALUE OF BALANCE WORK (Rs. Lacs)
1							
2							
3							
4							
5							

NOTES:

1. BIDDERS ARE REQUIRED TO FURNISH ALL THE JOBS OF SIMILAR NATURE WHICH THEY ARE EXECUTING (IN PROGRESS) AT THE TIME OF SUBMISSION OF TENDER, AS PER ABOVE FORMAT.

2. BIDDERS HEREBY UNDERTAKE THAT THEY HAVE FURNISHED THE DETAILS SOUGHT AS PER POINT NO. 1 IN TOTALITY AND THAT THE DETAILS FURNISHED IS COMPLETE IN ALL RESPECT.

3. BHEL WILL TAKE APPROPRIATE ACTION AS DEEMED FIT , IN CASE, IT IS FOUND AT A LATER DATE THAT THE CONTRACTOR HAD SUPPRESSED THE FACTS AND HAVE NOT FURNISHED THE CORRECT & COMPLETE INFORMATIONS.

Signature

DATE :

PLACE:

Name, Designation & Seal of Bidder

FORMS & PROCEDURES

CONTRACT AGREEMENT

Form No: F-10 (Rev 00)

BHARAT HEAVY ELECTRICALS LIMITED
(A Government of India Undertaking)
Power Sector – Region

CONTRACT AGREEMENT

AGREEMENT NO. _____

NAME OF WORK	
NAME OF THE CONTRACTOR WITH FULL ADDRESS	
VALUE OF WORK AWARDED	
LETTER OF INTENT NO.	
TIME ALLOTTED FOR COMPLETING THE WORK (DATE OF COMPLETION)	

SIGNATURE OF CONTRACTOR

(SIGNATURE OF BHEL OFFICER)

FORMS & PROCEDURES

CONTRACT AGREEMENT

THIS AGREEMENT MADE THIS _____ DAY OF _____ between BHARAT HEAVY ELECTRICALS LIMITED (A Government of India Enterprise) a Company incorporated under the Companies Act, 1956, having its Registered Office at BHEL House, Siri Fort New Delhi- 110049 (herein after called BHEL) of the ONE PART.

AND

M/S _____
_____ (hereinafter called the 'Contractor') of the SECOND PART.

WHEREAS M/s -----state that they have acquired and possess extensive experience in the field of -----

And Whereas in response to an Invitation to Tender No. ----- issued by BHEL for execution of ----- the contractor submitted their offer No.- -----dated -----And whereas BHEL has accepted the offer of the Contractor on terms and conditions specified in the Letter of Intent No.-----dated -----read with the references cited therein.

THIS AGREEMENT WITNESSES AND it is hereby agreed by and between the parties as follows:

1. That the contractor shall execute the work of -----and more particularly described in Tender Specification No -----including Drawings and Specifications (hereinafter called the said works) in accordance with and subject to terms and conditions contained in these presents, instructions to Tenderers, General Conditions of Contract, Special Conditions, Annexures, Letter of Intent dated -----and such other instructions, Drawings, Specifications given to him from time to time by BHEL.
2. The Contractor is required to furnish to BHEL Security deposit in the form of cash/ approved securities/ Bank Guarantee valid upto ----- for a sum of Rs.----- towards satisfactory performance and completion of the Contract.
3. The Contractor has furnished a Bank Guarantee bearing no.-----dated -----for a sum of Rs.-----executed by ----- in favour of BHEL towards Security Deposit valid upto -----

OR

The Contractor has furnished to BHEL an initial Security Deposit of Rs.-----in the form of cash / approved Securities/ B.G No.----- dated ----- for Rs.-----executed by ----- in favour of BHEL valid upto ----- and has agreed for recovery of the balance security deposit by BHEL @ 10% of the value of work done from each running bill till the entire Security Deposit is recovered.

OR

FORMS & PROCEDURES

The contractor has furnished to BHEL an initial Security Deposit of Rs.----- (Rs.----- vide Bank draft No.----- dated ----- and by adjusting EMD of Rs.----- submitted vide Bank draft No.----- dt.-----) and has agreed for recovery of balance Security Deposit by BHEL @ 10% of the value of work done from each running bill till the entire security deposit is recovered.

4. The Contractor hereby agrees to extend the validity of the Bank Guarantee for such further period or periods as may be required by BHEL and if the Contractor fails to obtain such extension(s) from the Bank, the Contractor, shall pay forthwith or accept recovery of Rs.----- from the bills in one installment and the contractor further agrees that failure to extend the validity of the Bank Guarantee or failure to pay the aforesaid amount in the manner specified above shall constitute breach of contract. In addition to above, BHEL shall be entitled to take such action as deemed fit and proper for recovering the said sum of Rs.-----

OR

In case the contractor furnishes the bank guarantee at a later date the contractor hereby agrees to extend the validity of bank guarantee for such further period or periods as may be required by BHEL and if the contractor fails to obtain such extension(s) from the bank, the contractor shall pay forthwith or accept recovery of the amount of bank guarantee given in lieu of security deposit from the bills in one installment and the contractor further agrees that failure to extend the validity of bank guarantee or failure to pay the aforesaid amount in the manner specified above shall constitute breach of contract. In addition to above, BHEL shall be entitled to take such action as deemed fit and proper for recovering the said sum.

5. That in consideration of the payments to be made to the Contractor by BHEL in accordance with this Agreement the Contractor hereby covenants and undertakes with BHEL that they shall execute, construct, complete the works in conformity, in all respects, with the terms and conditions specified in this Agreement and the documents governing the same.
6. That the Contractor shall be deemed to have carefully examined this Agreement and the documents governing the same and also to have satisfied himself as to the nature and character of the Works to be executed by him.
7. That the Contractor shall carry out and complete the execution of the said works to the entire satisfaction of the Engineer or such other officer authorised by BHEL, within the agreed time schedule, the time of completion being the essence of the Contract.
8. That BHEL shall, after proper scrutiny of the bills submitted by the Contractor, pay to him during the progress of the said works such sum as determined by BHEL in accordance with this Agreement.
9. That this Agreement shall be deemed to have come into force from ----- the date on which the letter of intent has been issued to the Contractor.

FORMS & PROCEDURES

10. That whenever under this contract or otherwise, any sum of money shall be recoverable from or payable by the Contractor, the same may be deducted in the manner as set out in the General Conditions of Contract or other conditions governing this Agreement.
11. That all charges on account of Octroi, Terminal and other taxes including sales tax or other duties on material obtained for execution of the said works shall be borne and paid by the Contractor.
12. That BHEL shall be entitled to deduct from the Contractor's running bills or otherwise Income Tax under Section 194 (C) of the Income Tax Act, 1961.
13. That BHEL shall be further entitled to recover from the running bills of the Contractor or otherwise such sum as may be determined by BHEL from time to time in respect of consumables supplied by BHEL, hire charges for tools and plants issued (Where applicable) and any other dues owed by the Contractor.
14. That it is hereby agreed by and between the parties that non-exercise, forbearance or omission of any of the powers conferred on BHEL and/or any of its authorities will not in any manner constitute waiver of the conditions hereto contained in these presents and the liability of the Contractor with respect to compensation payable to BHEL or Contractor's obligations shall remain unaffected.
15. It is clearly understood by and between the parties that in the event of any conflict between the Letter of Intent and other documents governing this Agreement, the provisions in the Letter of Intent shall prevail.

16. The following documents

1. Invitation to Tender No-----
and the documents specified therein.
2. Contractor's Offer No-----
dated-----.
3. _____
4. _____
5. _____
6. Letter of Intent No_____ dated_____.
7. _____

shall also form part of and govern this Agreement.

IN WITNESS HEREOF, the parties hereto have respectively set their signatures in the presence of

WITNESS

(CONT

RACTOR)

FORMS & PROCEDURES

1. (to be signed by a person holding
a valid Power of Attorney)

2.

WITNESS (For and on behalf of BHEL)

1.

2.

PROFORMA OF BANK GUARANTEE (in lieu of SECURITY DEPOSIT)

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having agreed to exempt (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ (hereinafter called the said Contractor which term includes supplier), from demand under the terms and conditions of the Contract reference No. _____² dated _____² valued at Rs. ² (Rupees -----)² for <Nature of the Work>³ (hereinafter called the said Contract) of Security Deposit for the due fulfilment by the said contractor of the terms and conditions contained in the said Contract, on production of a Bank Guarantee for Rs. _____⁴ (Rupees _____ only), we _____ (indicate the name and address of the Bank) having its Head Office at _____ (address of the head Office) (hereinafter referred to as the Bank) at the request of _____ [Name of Contractor(s)] do hereby undertake to pay to the Employer an amount not exceeding Rs. _____ in the event of any breach by the said Contractor(s) of any of the terms and conditions contained in the said Contract.

We, _____ (indicate the name of the Bank), do hereby undertake to pay the amounts due and payable under this guarantee without any demur, merely on a demand from the Employer. Any such demand made on the bank, shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor(s) in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this guarantee shall be a valid discharge of our liability for payment hereunder and the Contractor(s) shall have no claim against us for making such payment.

We, further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claim satisfied or discharged or till _____⁵ or till the office/Department/Division of Bharat Heavy Electricals Limited certifies that the terms and conditions of the said Contract have been fully and properly carried out by the said contractor(s) and also including the satisfactory performance of the equipment during guarantee period and accordingly discharges this guarantee. Unless a demand or claim under this guarantee is made on us in writing on or before the _____⁶, (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all the liability under this guarantee thereafter.

We, _____ (indicate the name of the Bank) _____ further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said contractor(s) from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said contractor(s) and to forbear or enforce any of the terms and conditions relating to the said Contract and we shall not be relieved from our liability by any reason of any such variation or extension being granted to the said contractor(s) or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said contractor(s) or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

This guarantee will not be discharged due to the change in the constitution of the Bank or the Contractor(s).

We,..... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before _____⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ (indicate the name of the Bank) _____ lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

Date _____ Day of _____
for _____ (indicate the name of the Bank) _____

(Signature of Authorised signatory)

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER .

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.
2. In Case of Bank Guarantees submitted by Foreign Vendors-
 - a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter-Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.

- b.2** In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
- b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
- b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

BANK GUARANTEE FOR ADVANCE

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ (hereinafter called "the Contractor" which expression shall include its successors and permitted assigns) a contract Ref No.....dated ²valued at Rs.....(Rupees -----) for <Nature of Work> ³(hereinafter called the 'Contract')

AND WHEREAS the Employer has agreed to advance to the Contractor, a sum of Rs..... (Rupees..... only), equivalent to _____% of the said value of the Contract (hereinafter called "the said Advance"), upon the condition, that the said Advance shall be secured by undertaking guarantee for Rs ----- (Rupees -----)⁴ from a Bank as hereinafter appearing.

We, ..., (hereinafter referred to as the Bank), having registered/Head office at and a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer without any demur, merely on your first demand any sum or sums upto a maximum amount but not exceeding Rs ----- (Rupees -----).

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Contractors/Supplier shall have no claim against us for making such payment.

We the Bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time on the request of the Employer for such period as may be desired by the Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms hereof. However, unless a demand or claim under this Guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this Guarantee.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank

We, ... Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Date.....

Place of Issue.....

¹ NAME OF VENDOR /CONTRACTOR / SUPPLIER

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.
2. In Case of Bank Guarantees submitted by Foreign Vendors-
 - a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2 **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3 The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4 The BG should clearly specify that the demand or other document can be presented in electronic form.

FORMS & PROCEDURES

Form No: F-13 (Rev 00)

FORM for EXTENSION OF VALIDITY OF BANK GUARANTEE

1. To be typed on non judicial Stamp Papers of value as applicable in the State of India from where the BG has been issued or the State of India where the BG shall be operated
2. The non judicial stamp papers shall be purchased in the name of the Party on whose behalf the BG is being issued or the BG issuing Bank

BANK GUARANTEE No:

Date:.....

To

(Write Designation and Address of Officer of BHEL inviting the Tender)

Dear Sir

Sub : Validity of Bank Guarantee No:..... Dated for
..... Rs in favour of yourself, expiry date, on
account of M/s in respect of Contract
Number....., (herein after called the Original bank Guarantee)

At the request of M/s....., we Bank, having its
branch Office at and having Head office at, do
hereby extend our liability under the above mentioned Bank Guarantee number..... dated
..... for a further period of Months/years from to expire on
.....

Except as provided above, all other terms and conditions of the Original Bank Guarantee No
..... Dated..... shall remain unaltered and binding on us.

Kindly treat this extension as an integral part of the original Bank Guarantee to which it would be attached.

Yours faithfully

Signature.....

Name & Designation.....

Power of Attorney/Signing Power No

Seal of Bank

MONTHLY PERFORMANCE EVALUATION OF CONTRACTOR

Form No.: F-15 (Rev 02)

Page 1 of 6

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#1.01	Cumulative number of days in the month, the nominated Quality Officer or his authorised nominee was not available	QUALITY	1.5		Quality Officer or his authorised nominee should be available for all the days of working at site	Daily Log Book entry/Incident Registers/letter references
#1.02	Number of instances of non- compliance wrt FQP, Standard Drawings, Specifications, E&C Manuals etc.	QUALITY	1.5		No deviation from FQP, Standard Drawings, Specifications, E&C Manuals etc. is allowed without BHEL Engineer's approval.	Daily Log Book entry/Incident Registers/letter references
#1.03	Percentage submission of test certificates for batches of welding electrodes, cement, sand, aggregate, consumable, Paints etc. as applicable for this month OR In case of MM & MH package, monthly checks for Storage/Preservation of material.	QUALITY	1		Submission of 100% Test certificates for materials as per FQP is mandatory. MM & MH package: Storage/Preservation as per manual/procedure.	Daily Log Book entry/Incident Registers/letter references
#1.04	Number of incidences of improper storage & preservation (not in accordance to the guidelines of BHEL MUs or approved FQP) of materials, consumables (viz. gases, welding electrodes & fluxes, fuel etc.) & bought-out items (paints, fasteners etc.) under the custody of the contractor	QUALITY	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#1.05	Rework/ Rejection instances in a month necessitated due to deviation from Standard Drawings /Specifications /Manuals /E&C procedures /FQPs or due to Poor Workmanship by contractor	QUALITY	2		Reworks/ Rejection should be as minimum as possible. Total number of reworks/ rejections due to reasons attributable to contractor.	Daily Log Book entry/Incident Registers/letter references
#1.06	Delay in preparation & submission of signed protocols / log sheets / site register / NDT test reports as per approved FQP/ Qualified Welder List along with photocopies of Welder ID cards / Welder Performance Evaluation records etc. in the month OR in case of MM / MH package reconciliation statement / verification report.	QUALITY	1		Within 2 days of measurements taken or within first 3 working days of next month, as advised by BHEL Engineer	Daily Log Book entry/Incident Registers/letter references
#1.07	Number of instances for Major equipment/product failure due to negligence/improper work/poor workmanship by contractor	QUALITY	1		No such event should happen	Daily Log Book entry/Incident Registers/letter references
#1.08	Total number of complaints received in the month on the quality of finish / aesthetics	QUALITY	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references

MONTHLY PERFORMANCE EVALUATION OF CONTRACTOR

Form No.: F-15 (Rev 02)

Page 2 of 6

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#2.01	Cumulative number of days of delay in submission of Plan FOR THE MONTH supported by deployment plan of Major T&Ps and Manpower (as per Form F-14) and relevant construction/layout drawings - like A4 plan / elevation views of plan status for structures / pressure parts/Civil Works, Piping isometrics for piping, Layout / PID / System reference sketch, Unloading / storage plans etc.as applicable.	PERFORMANCE	5		Number of days delayed from second working day of the month	Daily Log Book entry/Incident Registers/letter references
#2.02	Percentage of timely submission of Daily Reports for Progress of work, Resources, Consumables etc.	PERFORMANCE	1.5		Percentage of timely submission of daily reports/ Scheduled date is successive next day for each day	Daily Log Book entry/Incident Registers/letter references
#2.03	Number of days delayed for submission of FQP log sheets / protocols / Monthly Progress Reports for the work executed during the month under measurement	PERFORMANCE	1.5		Number of days delayed/Scheduled date is first 2 working days of next month	Daily Log Book entry/Incident Registers/letter references
#2.04	Percentage Shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month as per Form-14	PERFORMANCE	35		As per Part-A of Form-14	Progress review formats
#2.05	Number of days delayed in submission of Running bills with complete supporting documents (including updated reconciliation statement of BHEL issued material) for the month	PERFORMANCE	2		Number of days delayed / Scheduled date is 7th day of next month	Daily Log Book entry/Incident Registers/letter references
#2.06	Number of times the Top Management of contractor did not respond to critical issues of site, for the month	PERFORMANCE	1		Total number of instances	Daily Log Book entry/Incident Registers/letter references
#2.07	Cumulative number of days in the month the works were stopped / refused on interpretation of contract clauses/scope due to tendency of taking undue advantage by interpreting contract clauses in their favour	PERFORMANCE	2		Cumulative number of days lost	Daily Log Book entry/Incident Registers/letter references
#2.08	Number of times rework was refused by contractor	PERFORMANCE	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references

MONTHLY PERFORMANCE EVALUATION OF CONTRACTOR

Form No.: F-15 (Rev 02)

Page **3** of **6**

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#2.09	Cumulative number of days in the month recording / logging was not done in daily log / history register / hindrance register / soft form in a PC maintained at BHEL Site Office	PERFORMANCE	1		Cumulative number of days recording or logging was not done / all days of the month	Daily Log Book entry/Incident Registers/letter references
#3.01	Percentage of Manpower Deployed w.r.t. Plan for the month as per Form-14.	RESOURCES	7		As per Part-B2 of Form-14	Daily Log Book entry/Incident Registers/letter references
#3.02	Percentage of T&P Deployed w.r.t. Plan for the month as per Form-14.	RESOURCES	7		As per Part-B1 of Form-14	Daily Log Book entry/Incident Registers/letter references
#3.03	Cumulative number of major instances in the month hampering / affecting progress of work due to breakdown or non-availability of major T&P and MME for the work, under the scope of Contractor	RESOURCES	3		Cumulative number of instances	Daily Log Book entry/Incident Registers/letter references
#3.04	Cumulative number of major instances in the month hampering / affecting progress of work due to non-availability of Consumables/ use of improper consumables under the scope of contractor	RESOURCES	3		Cumulative number of instances	Daily Log Book entry/Incident Registers/letter references
#4.01	Number of non-compliances during the month for Statutory requirements like validity of Labour Licence, Insurance Policy, Labour Insurance, PF, BOCW Compliance etc. and any other applicable laws/ Regulation, Electrical Licence, T&P fitness certificate, Contractors' All Risk Policy etc. as applicable	SITE INFRASTRUCTURE & SERVICE	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#4.02	Cumulative number of days in a month poor illumination is reported at storage area, erection area, pre-assembly area and other designated areas by BHEL site.	SITE INFRASTRUCTURE & SERVICE	0.5		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references
#4.03	Cumulative number of days of non-availability of well-maintained toilets facilities for workers (separate for men and women) and non-availability of potable drinking water stations for workers in specified areas.	SITE INFRASTRUCTURE & SERVICE	1		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references

MONTHLY PERFORMANCE EVALUATION OF CONTRACTOR

Form No.: F-15 (Rev 02)

Page 4 of 6

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#4.04	Total number of instances in the month, Housekeeping NOT attended to in spite of instructions by BHEL -i.e. removal / disposal of surplus earth / debris / scrap / unused / surplus cable drums / other electrical items / surplus steel items / packing materials, thrown out scrap like weld butts, cotton waste etc. from the working area to identified locations	SITE INFRASTRUCTURE & SERVICE	2		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references
#4.05	Total number of instances in a month, Site Office with reasonably good facilities including enough nos. of computers and printers etc. for use by office and supporting staff was not made available/maintained.	SITE INFRASTRUCTURE & SERVICE	0.5		No discrepancy during regular or surprise visits	Photograph and report of the Engineer
#5.01	Number of days delayed in making labour payments for the last month	SITE FINANCE	2		Number of days delayed / Scheduled date is 7th day of next month	Daily Log Book entry/Incident Registers/letter references
#5.02	Number of complaints from labour/ sub supplier/ sub-contractor for non-receipt of payments from contractor	SITE FINANCE	1.5		Total number of complaints or reporting	Daily Log Book entry/Incident Registers/letter references
#5.03	Number of times the site operations were hampered for want of funds at the disposal of site-in-charge.	SITE FINANCE	1.5		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#6.01	Cumulative number of days in a month the nominated Safety Officer was not available	HSE & SA	1		Safety Officer should be available for all the days	Daily Log Book entry/Incident Registers/letter references
#6.02	Shortfall in number of weekly safety meetings in the month conducted or attended by the Safety Officer	HSE & SA	0.5		Safety meetings to be held every week	Copy of Minutes of meeting
#6.03	Level of compliance w.r.t decisions taken in previous Safety meetings	HSE & SA	0.5		Number of consolidated issues discussed in Safety meetings	Copy of Minutes of meeting, Non-compliance intimation documents from BHEL site
#6.04	Delay in submission of monthly report on safety (including electrical safety for equipment & personnel etc.) in the prescribed form	HSE & SA	1		Number of days delayed/Scheduled date is third working day of next month	Daily Log Book entry/Incident Registers/letter references
#6.05	Number of days taken for lodging FIRs from date of occurrence/notice of incident of theft / accident etc.	HSE & SA	0.5		Number of days delayed/Scheduled date is within 24 Hrs of occurrence/notice of incidence	Copy of FIR lodged by Contractor

MONTHLY PERFORMANCE EVALUATION OF CONTRACTOR

Form No.: F-15 (Rev 02)
Page 5 of 6

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#6.06	Number of times written(email, letters etc.) warning issued for non-availability/ use of improper Fall protection and rescue arrangement as lifeline, fall arrestors, safety net, hand-railings, covered floors, man-basket, rescue basket & kit etc. by the contractor	HSE & SA	2		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#6.07	Number of times punitive fines imposed for unsafe practices as per contract like non-availability/use of PPEs as safety shoes, helmets, goggles, gloves, lifeline, safety belts etc.	HSE & SA	1		Total number of non-compliances	Non-compliance intimation documents from BHEL site
#6.08	Percentage compliance to Emergency preparedness and response plan: Portable Fire-extinguishers, Buckets, Fire-wardens, display of emergency numbers, mock-drills, Hazard Identification and Risk Assessment(HIRA) etc.	HSE & SA	1		Compliance should be 100% as per HSE Plan or as finalized in Safety Meetings	Non-compliance intimation documents from BHEL site
#6.09	Number of times the agency has defaulted on display of safety posters / safety slogans / safety barriers/emergency numbers etc. in identified areas	HSE & SA	0.5		Total number of instances	Non-compliance intimation documents from BHEL site
#6.10	Non compliances observed during HSE and Safety Audit	HSE & SA	0.5		Total number of non-compliances	Non-compliance intimation documents from BHEL site, Audit Reports
#6.11	Cumulative number of days in the month, non-availability of First Aid Kit, First Aider & Emergency Vehicles/Ambulance.	HSE & SA	0.5		Cumulative number of days	Non-compliance intimation documents from BHEL site
#6.12	Number of days taken for submission of Root Cause analysis (RCA) for the accident from the cut-off date intimated by BHEL for submission of RCA	HSE & SA	0.5		Number of days delayed/Scheduled date is cut-off date intimated by BHEL	Daily Log Book entry/Incident Registers/letter references
#6.13	Non conductance of training (induction, job specific, height work etc.), tool box meeting and health check-up as per Contract requirements	HSE & SA	0.5		Number of incidences of non-conductance during the month	Daily Log Book entry/Incident Registers/letter references
Total			100			

MONTHLY PERFORMANCE EVALUATION OF CONTRACTOR

Form No.: F-15 (Rev 02)
Page 6 of 6

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
	Less Deduction in Score Due to Major Accidents (Fatal, Permanent Disability or bodily injury by which person injured is prevented to resume to work within 48 hours or more after accident,, Major Damage to Equipment etc.) attributable to the contractor @ 3 points/ accident					
	Less Deduction in Score Due to Minor Accidents attributable to the contractor @ 1 point/ accident					
	Less Deduction in Score Due to not Maintaining of Labour Colony (if applicable) as per BHEL HSE policy @2 points in a month on verification any day					
	Final Score					

Performance Score Summary for the Month	Total Score	Score Obtained
QUALITY	10	
PERFORMANCE	50	
RESOURCES	20	
SITE INFRASTRUCTURE & SERVICE	5	
SITE FINANCE	5	
HSE & SA	10	
OTHERS (deductions if any)	0	
TOTAL	100	

Note:

- 1) It is only indicative and shall be as per the online format issued by BHEL time to time.
- 2) No request will be entertained after specified date of current month w.r.t. changes requested in the scores of immediate previous month.

FORMS & PROCEDURES

Form No: F-19 (Rev 00)

MILESTONE COMPLETION CERTIFICATE **(issued by BHEL on the specific request of Contractor)**

Ref :

Date:

To,

(Name & address of Contractor)

Dear Sir,

References

1. Contract No:
2. Job Description:

This is to hereby confirm that the following Milestone Activity has been achieved in respect of the Contract /Job under reference

Sl No	Milestone Activity	Remarks

This certificate is issued as per your request vide letter no
without any prejudice to the rights of BHEL in line with the terms and conditions of the
above referred Contract

Yours faithfully,

For and on behalf of Bharat Heavy Electricals Limited

Construction Manager/Head (Subcontracts)

FORMS & PROCEDURES

Form No: F-20 (Rev 01)

CONTRACT COMPLETION CERTIFICATE (Issued by BHEL/HQ on the specific request of Contractor)

Ref :

Date:

To Whom so ever it may concern

1	DESCRIPTION OF WORK	
2	NAME AND ADDRESS OF THE CONTRACTOR	
3	CONTRACT NO	
4	CONTRACT VALUE	
5	LETTER OF INTENT NO & DATE	
6	CONTRACT PERIOD//CONTRACT DURATION	
7	DATE OF START/COMPLETION	
8	FINAL EXECUTED VALUE	
9	PERFORMANCE	GOOD SATISFACTORY UNSATISFACTORY

This certificate is issued as per your request vide letter no
without any prejudice to the rights of BHEL to use this certificate for evaluation of your offers for future
tenders

Yours faithfully,

For and on behalf of Bharat Heavy Electricals Limited

Head (Subcontracts)

FORMS & PROCEDURES

Form No: F-21 (Rev 00)

INDEMNITY BOND

(To be executed on a Non Judicial Stamp Paper of the requisite value as per Stamp Duty prevalent in the respective State)

This Indemnity Bond executed by <name of company> having their Registered Office at <xxxxxxxxxx> in favour of M/s Bharat Heavy Electricals Limited, a Company incorporated under the Companies Act, 1956, having its Registered Office at BH EL House, Siri Fort, Asiad, New Delhi - 110049 through its Unit at Power Sector _____ Region, _____, _____ State.
(Hereinafter referred to as the Company)

And whereas the Company has entered into a Contract with M/s xxxxxxxxx, the executants of this Deed (hereinafter referred to as the Contractor) as its contractor in respect of the work of "xxxxxxxxxxxxxxxxxxxxxxxxxxxx".

AND WHEREAS under the provisions of GCC further stipulates that the Contractor shall indemnify the Company against all claims of whatever nature arising during the course of execution of Contract including defects liability period of <xx Months> i.e till <xx xx xxxx>

Now this deed witnesses that in case the Company is made liable by any Authority including Court to pay any claim or compensation etc. in respect of all labourers or other matters at any stage under or relating to the Contract with the Contractor, the Contractor hereby covenants and agrees with the Company that they shall indemnify and reimburse the Company to the extent of such payments and for any fee, including litigation charges, lawyers' fees, etc, penalty or damages claimed against the Company by reason of the Contractor falling to comply with Central/States Laws, Rules etc, or his failure to comply with Contract (including all expenses and charges incurred by the Company).

The Contractor further indemnifies the Company for the amount which the Company may be liable to pay by way of penalty for not making deductions from the Bills of the Contractor towards such amount and depositing the same in the Government Treasury.

FORMS & PROCEDURES

The Contractor further agree that the Company shall be entitled to with hold and adjust the Security Deposit and/or with ho ld and adjust payment of Bills of Contractor pertaining to this Contract against any payme nt which the Company has made or is required to mak e for which the Contractor is liable under the Contract and that such amount can be withheld, adjusted by the Company till satisfactory and final settlement of all pending matters and the Contractor hereby gives his consent for the same.

The Contractor further agrees that the terms of indemnity shall s urvive the termination or completion of this contract.

The contractor further agrees that the liability of the contractor shall be extended on actual basis notwithstanding the limitations of liability clause, in respect of :

1. breach of terms of contract by the contractor
2. breach of laws by the contractor
3. breach of Intellectual property rights by the contractor
4. breach of confidentiality by the contractor

Nothing contained in this deed, shall be construed as absolving or limiting the liability of the Contractor under said Contract between the Company and the Contractor . That this Indemnity Bond is irrevocable and the condition of the bond is that the Contractor shall duly and punctually c omply with the terms and the conditions of this deed and contractu al provisions to the satisfaction of the Company.

In witness where of M/s xxxxxxxxxxxxxx these presents on the day, month and year first, above written at xxxxxxxx by the hand of its signatory Mr. xxxxxxxxxxxx.

Signed for and on behalf of
M/s xxxxxxxxxxxxxxxxxxxx

Witness:

1
2

FORMS & PROCEDURES

Form No: F-22 (Rev 00)

CONSORTIUM AGREEMENT

(To be executed on Rs. 50/- Non – Judicial Stamp Paper)

THIS AGREEMENT is made and executed on this _____ day of _____, by and between (1) M/s _____, (The First Party, i.e, the Bidder) a company incorporated under the Company's Act 1956, having its registered office at _____ (herein after called the "Bidder", which expression shall include its' successors, administrators, executors and permitted assigns) and (2) M/s _____, (The Second Party, i.e, the associates), a company incorporated under the Company's Act 1956, having its registered office at _____ (herein after called the " Associates", which expression shall include its' successors, administrators, executors and permitted assigns).

WHEAEAS the Owner, Bharat Heavy Electricals Ltd, a Government of India Undertaking, proposes to issue / issued an NIT (herein after referred to as the said NIT) inviting bids from the individual Bidders for undertaking the work _____ of _____ at _____ (herein after referred to as the said works).

WHEREAS the said NIT enables submission of a bid by a Consortium subject to fulfillment of the stipulations specified in the said NIT.

AND WHEREAS M/s _____ (The First Party, i.e, the Bidder) will submit its proposal in response to the aforesaid invitation to _____ bid by the Owner for _____ as detailed in the Bid doc. no. < TENDER REF----->

FORMS & PROCEDURES

AND WHEREAS M/s _____ (The First Party, i.e the Bidder) itself is meeting all the qualifying requirements except the qualifying requirements of _____ (as detailed in the NIT) and in order to fully meet the qualifying requirements of NIT, this tie-up agreement is _____ being entered into with M/s _____ (The Second Party, the Associates), who fully meet the balance part of the said work _____ (_____).

WHEREAS the First Party and the Second Party are contractors engaged in the business of carrying out various items of works. WHEREAS the two parties have agreed to constitute themselves into a consortium for the purpose of carrying out the said works, and that the consortium will be continued till the completion of the works in all respects.

WHEREAS the parties have agreed to certain terms and conditions in this regard:

NOW THEREFORE THIS AGREEMENT WITNESSETH AS FOLLOWS :

1. First and Second parties hereby constitute themselves into a Consortium for the purpose of bidding and undertaking the said works pursuant to the said NIT as hereinafter stated.
2. The First Party will be the leader (Lead Partner) and will be responsible for the entire works.

FORMS & PROCEDURES

CONSORTIUM AGREEMENT

3. The First Party shall undertake the following part(s) of work detailed in _____ the NIT namely

4. The Second Party shall undertake the following part(s) of work detailed _____ in the said NIT namely

5. The parties hereby declare and confirm that each of them will fulfill the required minimum qualifying requirements as prescribed in the said NIT for the works agreed to be undertaken by them as stated here-in-above.
6. It is also agreed between the parties hereto that all of them shall be individually and severally responsible for the completion of the said works as per the schedule. Further, if the Employer/Owner sustains any loss or damage on account of any breach of the Contracts, we the, Consortium partners individually and severally undertake to promptly indemnify and pay such losses / damages caused to the Employer/Owner on its written demand without any demur, reservation, contest or protest in any manner whatsoever.
7. The parties hereby agree and undertake that they shall provide adequate finances, suitable Tools, Plants, Tractors, Trailers, other transportation equipment, other Tools & Plants, Measuring & Monitoring Equipments (MMEs), Men and Machinery etc. for the proper and effective execution of the works to be undertaken by them as specified here-in-above.

FORMS & PROCEDURES

8. It is agreed interse between t he parties hereto that all the consequences liabilities etc., arising out of any default in the due execution of the said works shall be borne by the party in default, that is by party in whose area of works default has occurred, provided however, so far as M/s Bharat Hea vy Electricals Limited is concerned, all the parties shall be liable jointly and severally.

IN WITNESS HEREOF the parties above named have signed this agreement on the day month and year first above written at _____(Place) .

WITNESS

For

1. NAME (FIRST PARTY)

2. OFFICIAL ADDRESS

WITNESS

For

1. NAME (SECOND PARTY)

2. OFFICIAL ADDRESS

[The successful bidder shall have to execute the " JOINT DEED OF UNDERTAKING " in the format to be made available by BHEL at the time of awarding].

FORMS & PROCEDURES

Form No: F-23 (Rev 00)

REFUND OF SECURITY DEPOSIT

To,
The Construction Manager
BHEL Site Office

Dear Sir,

Sub : **Refund of Security Deposit**

Ref : Contract No:

Work:.....

I/We have submitted Final Bill in respect of the above Contract/Work vide our letter no:.....
dated In line with Tender conditions (GCC clause no 1.11), kindly arrange to
release/refund the Security Deposit along with Final Bill payments.

The details of Security Deposit are as below:

1. Cash Portion :
2. BG Portion :

Thanking You

Date: _____

Authorised representative of Contractor

To be filled up by BHEL

1. Security Deposit to be refunded:
 - a. Cash Portion:
 - b. BG Portion :
2. Less
 - a. Amount spent by BHEL on behalf of Contractor:
 - b. Payments made by BHEL on behalf of Contractor:
 - c. Other recoveries for Services etc
 - d. Any other recoveries
 - e. Total of 'a' to 'd':
3. Net Amount to be released (1-2) :
4. Certified that
 - a. The payment recommended for release is in order and there are no demands other than those included in the claim outstanding from the Contractor
 - b. Contract Guarantee period of Months commenced wef : _____
 - c. All objections raised so far have been settled
 - d. A note for refund of Security Deposit has been made in the Measurement Book

Signature of BHEL Engineer

Construction Manager

Date:-----

FORMS & PROCEDURES

Form No: F-24 (Rev 00)

REFUND OF GUARANTEE MONEY

BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR, _____ REGION

Ref No:

Date:

1. Name and Address of Contractor :
2. Contract Agreement/LOI No :
3. Date of Contract Agreement/LOI :
4. Name of the Work undertaken :
5. Date of commencement of the Work :
6. Date of Completion of the Work :
7. Period of Maintenance :
(Guarantee Period)
8. Date on which the Final Bill was paid :
9. Last date of making good the defect :
during Maintenance Period
10. Expenditure incurred by BHEL during :
Maintenance Period, if any, recoverable
11. Date on which Guarantee Money refund:
falls due as per Contract
12. Amount of Guarantee Money to be refunded:
13. Less Amounts recoverable (with details)
 - a. Amount spent by BHEL on maintenance :
 - b. Payments made by BHEL on behalf of Contractor:
 - c. Court dues/penalties/compensation :
 - d. Other recoveries for Services, etc :
 - e. Total of 'a' to 'd' :
14. Net Amount recommended for release (12-13) :

FORMS & PROCEDURES

Signature of BHEL Engineer

Date: _____

CERTIFICATE TO BE FURNISHED BY THE CONTRACTOR

I/We have no claim or demand outstanding against BHEL _____, for the work done or for labour or material supplied or any other account arising out of or connected with the Contract Agreement/LOI (No _____ dated _____) and the payment of this bill shall be in full and final settlement of all my/our claims and demands including the 'Deposits' of the Contract Agreement/LOI referred to.

Signature of Contractor

Date: _____

CERTIFICATE TO BE FURNISHED BY SENIOR ENGINEER/CONSTRUCTION MANAGER

1. Certified that

- a. The payment recommended for release is in order and there are no demands other than those included in the claim outstanding from the Contractor
- b. Maintenance period (Contract Guarantee period) is over and the Contractor has carried out the works required to be carried out by him during the period of maintenance (Guarantee) to our satisfaction, and all expenses incurred by the Company on carrying out such works have been included for adjustment
- c. All objections raised so far have been settled
- d. A note for refund of Guarantee Amount has been made in the Measurement Book and Contract Agreement/Work Order

Signature of BHEL Engineer

Construction Manager

Date:-----

FOR USE IN ACCOUNTS DEPARTMENT

Passed for Rs _____ (Rupees _____ only)

Accountant

Accounts Officer

ACKNOWLEDGE BY THE CONTRACTOR

Received Rs _____ in full and final settlement of my/our claim

Signature of Contractor

Date: _____

FORMS & PROCEDURES

Form No: F-25 (Rev 00)

POWER OF ATTORNEY for SUBMISSION OF TENDER/SIGNING CONTRACT AGREEMENT

(To be typed on non judicial Stamp Papers of appropriate value as applicable and Notarised)

KNOW ALL MEN BY THESE PRESENTS, that I/We do hereby make, nominate, constitute and appoint Mr, whose signature given below herewith to be true and lawful Attorney of M/s..... hereinafter called 'Company', for submitting Tender/entering into Contract and inter alia, sign, execute all papers and to do necessary lawful acts on behalf of Company with M/s Bharat Heavy Electricals Ltd, Power Sector _____ Region, _____, in connection with

.....
.....
..... vide Tender Specification No :
_____, dated _____.

And the Company do hereby agree to ratify and confirm all acts, deeds, things or proceedings as may be lawfully done by the said attorney and by or on behalf of the company and in the name of the company, by virtue of the powers conferred herein and the same shall be binding on the company and shall have full force and effect.

IN WITNESS WHEREOF the common seal of the company has been hereunto affixed in the manner hereinafter appearing on the document.

Dated at _____, this _____ day of _____

Director/CMD/Partner/Proprietor

Signature of Mr.....(Attorney)

Attested by: Director/CMD/Partner/Proprietor

Witness

Notary Public

FORMS & PROCEDURES

Form No: F-26 (Rev 00)

ANALYSIS OF UNIT RATES QUOTED

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

Offer Reference No:.....

Date:.....

To,
(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : Analysis of Unit Rates Quoted

Ref : Tender Specification No:

Analysis of Unit Rates quoted by us in respect of above Tender is as detailed

SN	DESCRIPTION	% OF QUOTED RATE	REMARKS
01	SITE FACILITIES VIZ., ELECTRICITY, WATER OTHER INFRASTRUCTURE.		
02	SALARY AND WAGES + RETRENCHMENT BENEFITS		
03	CONSUMABLES		
04	T&P DEPRECIATION & MAINTENANCE		
05	ESTABLISHMENT & ADMINISTRATIVE EXPENSES		
06	OVERHEADS		
07	PROFIT		
	TOTAL	100%	

Yours faithfully,

(Signature, Date & Seal of Authorized
Representative of the Bidder)

FORMS & PROCEDURES

Form WAM 6

BHARAT HEAVY ELECTRICALS LIMITED DIVISION.....

Running Account Bill

(Para 4.31.1 of Works Accounts Manual)

Name of the Contractor:
Name of the Work:
Sanctioned Estimate:
Code No:
Contract Agreement No :

Dated:

Departmental Bill no:
Division:
Date of written order to commence the work :
Date of commencement of the Work:
Due date of completion as per Agreement:

Date:
Sub-Division:

1. ACCOUNT OF WORK EXECUTED

On account payment for work not previously previously measured**			Item No of	Description of Work	Quantity as per agree- ment	Quantity executed up to date	Rate	Unit	Payment on the basis of actual measure- ment up to date	Quantity since last running account bill	Payment on the basis of actual measurement since last running account bill	Remarks	
Total As per Running Account bill Rs.	since last running account bill Rs.	Total up to date Rs.					Rs.	P.	Rs.	P.	Rs.	P.	
1	2	3	4	5	6	7	8	9	10	11	12	13	

- * *1. Whenever payment is made on 'on account' basis without actual measurements the amount in whole rupees should be entered in columns 1 to 3 only and not in columns 7 to 12.
2. whenever there is an entry in column 12 on the basis of actual measurement, the whole of the amount previously paid without detailed measurement should be adjusted by a minus entry in column 2 equivalent to the amount shown in column 1, so that the total up to date in column 4 may become nil.

FORMS & PROCEDURES

Form WAM 6 (contd...)

1	2	3	4	5	6	7	8	9	10	11	12	13

Total value of work done up to date (A) ...

Deduct value of work shown on the last
Running Account Bill (B) ...

Net value of work done since last (C) ...

Rupees (in words)

.....only.

FORMS & PROCEDURES

Form WAM 6 (contd...)

II.MEMORANDUM OF PAYMENTS

		Rs.	P.		I	II
					Rs. P. P.	Rs. P. P.
1.Total value of work actually measured as per Account No. I. Column 10	(A)					
2.Total up to date 'on account' payment for work covered by approximate Or plan measurements as per Account No. I, Column 3	(B)					
3.Total up to date secured advances on security of materials as per column 8 Of the enclosed Account (Form WAM 10)	(C)					
4.Total up to date payments [(A) + (B) + (C)]	(D)					
5.Total amount of payments already made as per Entry (D) of last Running Account Bill No..... Dated.....forwarde to the Accounts Office on	(E)					
6.Balance [(D)-(E)]						
7.Payments now to be made:						
a) by cash/cheque						
b) by deduction for value of materials supplied						
c) by BHEL vide Annexure A attached						
d) by deduction for hire of tools and plant vide						

FORMS & PROCEDURES

Annexure B attached		
e) by deduction for other charges vide Annexure C		
Attached		
f)by deduction on account of security deposit		
h) by deduction on account of Income Tax		

Note: Amounts relating to items 4 to 6 above should be entered in column II and those relating to item 7 in column I. The amount shown against item 6 and the total of item 7 should agree with each other.

III.CERTIFICATE OF THE ENGINEER IN CHARGE

Form WAM 6 (contd...)

1. The measurements on which the entries in column 7 to 12 of Part I of this Bill (Account of work executed) are based were made by.....and are recorded at pages.....of
(Name and Designation)

Measurement Book No

2. Certified that the methods of measurement are correct and the work has been carried out in accordance with the terms and conditions, schedules, specifications and drawings etc, forming part of the contract agreement, subject to deviations included in the deviation statement (Annexure D).
3. Certified that in addition to and quite apart from the quantities of work actually executed as shown in column 10 of Part I, some work has actually been done in connection with several items and the value of the such work is, in no case, less than 'on account' payments as per column 3 of Part I, made or proposed to be made, for the convenience of the contractor in anticipation of, and subject to the results of, detailed measurement which will be made as soon as possible.

Signature of Contractor

Signature of Engineer in charge

Date:

Designation:

Date:

FORMS & PROCEDURES

IV. CERTIFICATE OF THE SENIOR ENGINEER

1. Certified that measurements have been check measured to the prescribed extent by at site and also by the undersigned and the relevant entries have been intialled in the Measurement book. (vide pages.....)
(Name and Designation)
2. Certified that all the measurements recorded in the measurement book have been correctly billed for
3. Certified that all recoberable amounts in respect of materials tools and plant etc, and other charges have been correctly made vide Annexures A to C attached.
Certified for payment * of Rs.....(Rupees.....only)
To be paid in cash/by cheque in the presence of

ALLOCATION

The expenditure is chargeable as under and to be included in the accounts for.....20.....

Ledger Head	Debit (Gross amount)	Credit (Deductions)

Rs. P.

Rs. P.

Total

* Here specify the net amount payable.

Signature of Senior Engineer
Date:

Form WAM 6 (contd...)

V.ENTRIES TO BE MADE IN THE ACCOUNTS OFFICE

Accounts Bill No Dated.....
Entered in Journal Book vide entry No.....Dated.....
Passed for.....Rs.....
Less Deductions.....Rs.....
Net Amount Payable.....Rs.....
(Rupees.....only)
Payable to Shri/M/s.....by cheque/cash
Entered in Contractor's Ledger No.....Page.....

ALLOCATION

Estimate No:

Code no:

Name of the Work:

Ledger Head	Debit (Gross amount)	Credit (Deductions)
	Rs. P.	Rs. P.
-----	-----	-----
-----	-----	-----

FORMS & PROCEDURES

Assistant Date:	Accountant Date:	Account Officer Date:	Total	-----	-----

VI. Received Rs.....(Rupees.....only) as per
Memorandum of Payments on account of this work.

Signature of witness Address : Date:	Revenue	Stamp Signature of Contractor Date:

VII. ENTRIES TO BE MADE BY TREASURY SECTION

Cash Book entry No. and date:	Amount paid	Rs.....
	Amount unpaid	Rs.....
	Total	Rs.....
	Signature of Cashier	
	Date:	

Form WAM 6 (contd...)

ANNEXURE A

FORMS & PROCEDURES

Statement showing details of materials issued to the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No.	Stores issue Voucher No. and date	Issue voucher No. and date allotted by stores to the SIV	Description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Whether recoverable from the contractor or supplied free	If recoverable from the contractor				REMARKS
							Rate at which recoverable	Amount recoverable	Amount recovered up to previous bill	Balance now recovered	
							Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8	9	10	11	12
Total											

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE B

Statement showing tools and plant issued to the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No	Description of tools and plant issued	Period for which	Rate at which	Amount recover-	Amount recovered	Balance now	Remarks
		Issued	recovery	able	upto	recovered	
			Is to be		previous		
			Made		bill		
			Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8

Total

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE C

Statement showing details of other recoveries to be made from the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No	Particulars	Unit	Quantity	Rate	Amount recover- able	Amount recovered upto pre- vious bill	Amount now recovered	Remarks
				Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8	9

1. Water Charges
2. Electricity charges
3. Seignorage charges
4. Medical charges
5. Cost of empty gunny bags and
Empty containers not returned
- 6.
- 7.
- 8.
- 9.

FORMS & PROCEDURES

10.

Total

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE D

Name of the Contractor:
Name of the Work:

Contract Agreement No:
Date:

Sl. No.	Description of item	Unit	Quantity as per Agreement	Quantity as executed	Quantity further anticipated	Total quantity anticipated on completion	Rate as per agreement Rs. P.
1	2	3	4	5	6	7	8

Rate as the executed with any Rs. P.	Amount as per agreement Rs. P.	Amount as executed Rs. P.	Amount further anticipated Rs. P.	Total amount anticipated on completion Rs. P.	Difference Excess savings Rs. P. Rs. P.	Reason for deviation authority, if
9	10	11	12	13	14 15	16

Signature of Engineer in Charge
Date:

Signature of Senior Engineer
Date:

FORMS & PROCEDURES

[illegible]

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:RGN-S2098:21

[illegible]

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:RGN-S2098:21

II MEMORANDUM OF PAYMENT												
										Rs.	P	
1	Total Value of work actually measured as per Account no I column 10 (A)											
2	Deduct amount of paym,ents already made as per last running account bill No Dated..... Forwarded to the Accounts Office on (B)											
3	Payments now to be made { (A) - (B)} (C)											
4	Deduct ammounts recoverable from the contractor on account of :								Rs	P		
	a	Material suplied by BHEL vide annexure A attached										
	b	Hire of Tools & Plants vide Annexure B attached										
	c	Other charges vide Annexure C attached										
	d	Income Tax										
	Total deduction											
5	Balance											
6	Refund of 50% of security deposite on completion of work											
7	Net amount to be paid to the Contractor											
III. CERTIFICATE OF THE ENGINEER IN CHARGE												
1	The measurement on which the entries in coulms 7 to 12 of Part I of this bill (Account of work executed) are based were made by (Name and designation)											
2	A statement showing the quantities of stores issued to the contractor (whether free or on recovery basis) and their disposal is attached.											
	Date:								Signature of Engineer in charge			
									Designation			

[illegible]

V. ENTRIES TO BE MADE IN THE ACCOUNTS OFFICE																											
Account Bill no..... Dated Entered in Journal book vide entry No.....Dated..... Passed for.....Rs..... Less Deductions.....Rs..... (Rupees.....Only) Payable to Shri/M/s..... by cheque/cash Entered in contractors' Ledger no..... Page						<table style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="3" style="text-align: center; padding: 5px;">ALLOCATION</th> </tr> <tr> <td style="width: 60%; padding: 5px;"> Estimate No: Name of the Work </td> <td colspan="2" style="width: 40%; padding: 5px;"> Code No </td> </tr> <tr> <td style="padding: 5px;"> Ledger Head </td> <td style="padding: 5px;"> Debit (Gross Amount) Rs P </td> <td style="padding: 5px;"> Credit (Deduction) Rs </td> </tr> <tr> <td style="padding: 5px;"> </td> <td style="padding: 5px;"> </td> <td style="padding: 5px;"> </td> </tr> <tr> <td style="padding: 5px;"> Total </td> <td style="padding: 5px;"> </td> <td style="padding: 5px;"> </td> </tr> </table>							ALLOCATION			Estimate No: Name of the Work	Code No		Ledger Head	Debit (Gross Amount) Rs P	Credit (Deduction) Rs				Total		
ALLOCATION																											
Estimate No: Name of the Work	Code No																										
Ledger Head	Debit (Gross Amount) Rs P	Credit (Deduction) Rs																									
.....																											
Total																											
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; padding: 5px;">Assistant Date:</td> <td style="width: 33%; padding: 5px;">Accountant Date:</td> <td style="width: 33%; padding: 5px;">Accounts officer Date:</td> </tr> </table>						Assistant Date:	Accountant Date:	Accounts officer Date:																			
Assistant Date:	Accountant Date:	Accounts officer Date:																									
VI. Received Rs.....(Rupees.....Only) in full and final settlement of all moneys due under this contract and I / we have no further claims of this contract.																											
Signature of Witness Address																											
Revenue Stamp Signature of Contractor Date:																											
VII . ENTRIES TO BE MADE BY TREASURY SECTION <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px;">Cash book entry no and date :</td> <td style="width: 50%; padding: 5px;"> Amount Paid Rs..... Amount unpaid Rs..... Total Rs..... </td> </tr> </table> Signature of Cashier Date:													Cash book entry no and date :	Amount Paid Rs..... Amount unpaid Rs..... Total Rs.....													
Cash book entry no and date :	Amount Paid Rs..... Amount unpaid Rs..... Total Rs.....																										

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:RGN-S2098:21

BHARAT HEAVY ELECTRICALS LIMITED DIVISION..... And Final bill (Para 4.3.2 Of Works Accounts Manual)														
Name of Contractor							Departmental Bill no				Date			
Name of the Work							Division				Division			
Sanctioned Estimate							Date of written order to commence the work							
Contract Agreement/work Order No							Date of commencement of work							
							Due date of completion as per agreement							
							Date of actual completion of the work							
I. ACCOUNT OF WORK EXECUTED														
On Account payment for the work not previously measured **										Payment on the basis of actual measurement up to date Rs P	Quantity since last running account bill	Payment on the basis of actual measurement since last running account bill Rs P	Remarks	
Total as per last running account bill Rs.	Since last running account bill Rs	Total up to date Rs												
1	2	3	4	5	6	7	8	9	10	11	12	13		

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:RGN-S2098:21

1	2	3	4	5	6	7	8	9	10	11	12	13

Total Value of Work Done up to date (A)	
Deduct Value of work shown on the last running account bill (B)	
Net value of work done since last running account bill (C)	

Rupees (In Words).....Only

II MEMORANDUM OF PAYMENT

		Rs.	P
1	Total Value of work actually measured as per Account no I coloumn 10	(A)	
	Deduct amount of paym,ents already made as per last running account bill No Dated.....		
2	Forwarded to the Accounts Office on	(B)	
3	Payments now to be made { (A) - (B)}	(C)	
4	Deduct ammounts recoverable from the contractor on account of :	Rs	P
	a Material suplied by BHEL vide annexure A attached		
	b Hire of Tools & Plants vide Annexure B attached		
	c Other charges vide Annexure C attached		
	d Income Tax		
	Total deduction		
5	Balance		
6	Refund of 50% of security deposite on completion of work		
7	Net amount to be paid to the Contractor		

III. CERTIFICATE OF THE ENGINEER IN CHARGE

The measurement on which the entries in coulms 7 to 12 of Part I of this bill (Account of work executed) are based were made by

1	(Name and designation)
2	A statement showing the quantities of stores issued to the contractor (whether free or on recovery basis) and their disposal is attached.

Date:

Signature of Engineer in charge
Designation

IV CERTIFICATE OF THE SENIOR ENGINEER

- 1 Certified that I have personally inspected the work and that the work has been physically completed on the due date in accordance with the terms and
Cretified that the measurements have been check measured to the prescribed extent by
..... (Name & designation). And by the the undersigned at site and relevent entries have been initiated in the measurement book (vide
2 pages.....)
- 3 Certified that the methods of measurement are correct
- 4 Certified that the measurements have been technically checked with reference to contract drawings, deviations etc
- 5 Certified that all the measurements recorded in the measurement book have been correctly billed for at the contract rates or approved rates.
- 6 Certified that all the recoverable amounts in respect of stores, tools and pallant, elwater, electricity charges etc, have been correctly made vide Annexures A
- 7 Certified that the issues of all stores as per statement atytached (whether charged to the contractor or direct to the work) have been technically checked and

Certified for payment of * Rs (Rupees.....) (Only). To be paid in
cash/by cheque in the presence of

ALLOCATION

The expenditure as under and to be included in the accounts for 19

Ledger Head	Debit (Gross Amount)		Credit (Deduction)	
	Rs.	P	Rs.	P
.....				
Total				

* Here specify the net amount payable

Signature of Senior Engineer
Date

V. ENTRIES TO BE MADE IN THE ACCOUNTS OFFICE

Account Bill no..... Dated
Entered in Journal book vide entry No.....Dated.....
Passed for.....Rs.....
Less Deductions.....Rs.....
(Rupees.....Only)
Payable to Shri/M/s..... by cheque/cash
Entered in contractors' Ledger no..... Page

ALLOCATION		Code No
Estimate No:		
Name of the Work		
Ledger Head	Debit (Gross Amount) Rs P	Credit (Deduction) Rs
.....		
Total		

Assistant	Accountant	Accounts officer
Date:	Date:	Date:

VI. Received Rs.....(Rupees.....Only) in full and final settlement of all moneys due under this contract and I / we have no further claims of this contract.

Signature of Witness
Address

Revenue Stamp
Signature of Contractor
Date:

VII . ENTRIES TO BE MADE BY TREASURY SECTION

Cash book entry no and date :

Amount Paid Rs.....
Amount unpaid Rs.....
Total Rs.....

Signature of Cashier
Date:

ANNEXURE A

Part I

Statement showing details of material issued to the contractor Shri/M/s..... In respect of Contract

Agreement/Work Order No..... Dated

SI No	Stores Issue voucher No and date	Issue voucher No and date alloted by stores to the SIV	description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Whether recoverabl e from the contractor or supplied free	Rate at which recoverable		Amount Recoverabl e		Amount recoverable upto previous bill		Balance Now recovered		Remarks
							Rs	P	Rs	P	Rs	P	Rs	P	
1	2	3	4	5	6	7	8		9		10		11		12

Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE A

Part II

Statement showing details of material issued to the contractor Shri/M/s..... in respect of Contract Agreement/Work Order No..... Dated and not covered by the agreement

SI No	Stores Issue voucher No and date	Issue voucher No and date alloted by stores to the SIV	description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Issue Rate		Amount Recoverabl e		Amount recoverable upto previous bill		Balance Now recovered		Remarks
						Rs	P	Rs	P	Rs	P	Rs	P	
						7		8		9		10		
1	2	3	4	5	6	7		8		9		10		11

Total

Add Departmental Charges

Add Sales Tax (wherever applicable)

Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE B

Statement showing TOOLS & PLANTS issued to the contractor Shri/M/s..... in respect of Contract Agreement/Work Order No..... Dated and not covered by the agreement

SI No 1	Description of tools & plants issued 2	Period for which issued 3	Rate at which Recivry is to be made 4	Amount recoverabl e Rs P 5		Amount recoverable upto previous bill Rs P 6		Balance Now recovered Rs P 7		Remarks 8

Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE C

showing detail of other recoveries to be made from the contractor Shri/M/s.....
nent/Work Order No.....Dated.....

Sr.No	Particulars	Unit	Quantity	Rate Rs. P.	Amount recoverable Rs. P	Amount recovered upto previous bill Rs. P.	Amount now recovered Rs. P.	Remarks
1	2	3	4	5	6	7	8	9
	1 Water Charges							
	2 Electricity Charges							
	3 Seignorage Charges							
	4 Medical Charges							
	Cost of empty gunny bags and empty containers not 5 returned							
	6							
	7							
	8							
	9							
	10							
Total								
Signature of Contractor			Signature of Engineer Incharge			Signature of Sr. Engineer		
Date			Date			Date		

Form WAM 7 (Contd.)

**ANNEXURE D -
DEVIATION STATEMENT :**

Name of the Contractor :

Contract Agreement/Work Order No. :

Name of the Work :

Date :

Sl. No.	Description of item	Unit	Quantity as per agreement	Quantity as executed	Rate as per agreement Rs. P.	Rate as executed Rs. P.	Amount as per agreement Rs. P.	Amount as executed Rs. P.	Difference		Reason for the deviation with authority, if any
									Excess	Savings	
1	2	3	4	5	6	7	8	9	10	11	12

Signature of Engineer in Charge

Date :

Signature of Senior Engineer

Date :

ANNEXURE E

Statement showing the consumption of materials issued to the contractor Shri/M/s.....
in respect of Contract Agreement/Work Order No..... Dated.....

Name of the Work :

ON RECOVERY BASIS

Sl. No.	Description of material	Unit	Quantity actually issued	Quantity actually incorporated in the work	Balance	Particulars of disposal of balance	Quantity to be issued as per approved data for work actually done	Variation in consumption (Difference between column 5 and 8)		Rate chargeable for excess/short consumption, if any	Amount recoverable for excess/short consumption, including materials not returned	
								More	Less	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8	9	10	11	12	13
1.	Cement											
2.	Bricks											
3.	Wood.....											
4.	Asbestos Sheet											
5.	Iron Materials											
6.												
7.												
8.												
9.												
10.												

Signature of Contractor

Date :

Signature of Engineer in Charge

Date :

Signature of Senior Engineer

Date :

Note : 1. The quantities shown in columns 4 and 5 above should tally with those shown in columns 5 and 6 respectively of Annexure A (Part I and II).

2. Data statement of theoretical consumption should be attached in support of quantity specified in column 8.

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Name of the work :	
Name of the Contractor :	
Date of commencement of the work:	
Contract agreement/work ordered no. and date:	
Reference to supplementary agreement no,if any :	
Whether administrative approval and technical sanction has been accorded by the competent authority ? If so ,cite reference	
Whether sanction of the competent authority and financial concurrence of the Accounts Department for award of the work has been accorded ? If so,cite reference.	
Whether the work has been completed in time ? If not ,whether penalty has been levied or sanction of the competent authority for extension of time granted and communicated to the Accounts Department with reasons for grant of extension? (Due and actual date of completion of the work and reference to letter no. and date granting the extension of time should be given)	
(a) Whether the rates allowed in the bill have been checked with the contract agreement ? (b) Whether the rates for extra/supplemental items have been approved by the competent authority and the sanction communicated to the accounts Department together with rate analysis? If so,cite reference.	
Whether deviations have been approved by the competent authority? If yes, give reference to the approval; if not, give reasons.	
Whether the rates of recovery of stores issued to the contractor which are not provided for in the Contract Agreement have been settled in consultation with Finance?	
Whether discrepancies pointed out by the Accounts Department in the store statement have been reconciled and accepted by the Accounts Department?	

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Whether materials issued to the contractor in excess of the theoretical requirements have been returned to the Stores Department and the no. and date of such returned stores vouchers have been shown in stores statement? If not, whether the cost of such excess material has been recovered at the prescribed rate? Whether consumption statements in respect of materials chargeable to the work have been attached to the bill?	
Whether consumption of materials shown has been technically checked by Senior Engineer?	
Whether materials issued and used in the work is not less than that required for consumption in work according to our specification? If consumption is less, whether necessary recovery has been made in the bill?	
Whether measurements have been checked by the Engineer and Sr. Engineer to the extent required and certificates of check recorded in the measurement books?	
Whether contractor has signed the bill and the measurement books without reservations? If not, whether reasons have been intimated to the Accounts Department?	
Whether arithmetical calculations have been checked and certificate recorded in the measurement books by a person other than the one who calculated initially	
Whether any work was done at the risk and cost of the contractor and whether such cost has been recovered from him? Give particulars.	
Whether all advance payments on running Accounts have been recovered?	
Whether all the recoveries due to services given to the contractor like rent of accommodation, water charges, electricity charges etc. have been recovered and whether payments made by the company on behalf of the contractor have been adjusted?	
Whether the files containing abstracts from measurement books/ standard measurement books have been completed/ updated?	
Whether hire charges of tools and plant have been recovered and the statement of hire charges with full details attached?	

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Whether the certificate of workmanship and completion of work according to specifications, drawings etc. is recorded by Engineer/ Sr. Engineer and whether recoveries have been made for defective works, if any?	
Whether all corrections in the bill/measurement books etc. have been neatly made and attested and there are no overwriting?	
Whether final measurements have been taken as soon as possible after completion of work and the certificate of completion issued? If not, whether reasons for delay have been recorded and communicated to Accounts?	
In respect of Quantities reduced in the final bill as compared to the running payment, whether adequate reasons have been recorded and communicated to Accounts?	
Whether the Expenditure has been classified correctly according to heads of Account recorded in the sanctioned estimate?	
Whether the work has been completed within the estimated cost? If not, what is the percentage of excess over the sanctioned estimate/ administrative approval? In case the excess is beyond the competency of Sr. Engineer, what action has been taken for the obtaining the approval of the authority competent to sanction the excess?	
(a) If the contractor has furnished bank guarantee in lieu of cash security deposit towards proper execution of works and guarantee against defects during the maintenance period, whether the period of currency of the bank guarantee covers the entire maintenance period? (b) If not, whether security deposit has been proposed to be recovered from the final bill?	
Whether all the previous audit objections raised on running Account bills have been settled? If so, cite reference.	
Signature of Engineer in Charge	Signature of Engineer in Charge
Date:	Date:



PS-

Page 1 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

Date of Plan/ Review.....

SN.	Description of Work	Unit of Measurement	Unit Rate	Planned		Cumulative Shortfall attributable to contractor upto last month (Refer Note 1)		Achieved		Shortfall attributable to BHEL w.r.t Plan (as per Col. 3 of Part-D)		Cumulative Shortfall attributable to Contractor upto & including this month		REMARKS (Reasons for Shortfall attributable to Contractor. Supporting documents to be kept as record.)
				(QTY Planned for the month as per Part –C of last month)										
(a)	(b)	(c)	(d)	A		B		C		D		E=A+B-C-D		
				Phy.	Financial	Phy	Financial	Phy.	Financial	Phy.	Financial	Phy.	Financial	
	Value of Other Items not mentioned above but planned to be executed in this month													
Total					ΣA		ΣB		ΣC		ΣD		ΣE	

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 2 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART- A: Contd.....

Note 1: **In addition to the work planned as per Col. 'A', Contractor shall also make full efforts to minimize the 'Cumulative shortfall attributable to contractor upto the month' as mentioned in Col. 'B' by enhancing its resources, so as to achieve the completion of activities as per agreed schedule. In case contractor is not able to execute the entire shortfall, then BHEL 'Engineer in-charge', shall decide the priority of work to be executed and it shall be binding on the contractor.**

Note 2: Percentage Shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month = $[(\Sigma E - \Sigma B) / (\Sigma A - \Sigma D)] \times 100$
In case, $(\Sigma E - \Sigma B)$ is negative, then it shall be treated as zero percent."

Note 3: Form 14 should include all items being planned in the current month, and all items against which shortfall was attributable to contractor till previous month. However, for practical reason, if it is not possible to mention some of the items in Form-14 being planned to be executed in this month, then also value of such items shall necessarily be included in calculation of Total Value.

Note 4: In case reason for shortfall attributable to contractor is w.r.t. T&P and Manpower, it should be in conformity with Part B1 and B2.

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 3 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – B-1: PLAN/REVIEW OF DEPLOYMENT OF MAJOR T&Ps FOR THE MONTH OF

Date of Plan/ Review.....

CONTRACTOR'S SCOPE: -

SN.	PLAN				DEPLOYMENT STATUS			
	Major T&P to be deployed as per work planned for the month	QTY	Deployment Period (in days)	Weightage assigned to planned T&P (in fraction such that $\Sigma C = 1$)	Actual Deployed Quantity	Actual Deployment Period (in days)	Weighted T&P Deployed	REMARKS (Works affected due to non-deployment of T&Ps)
		A	B	C	D	E	$F = (C \times D \times E) / (A \times B)$	

Note: In case, $E > B$, it shall be considered as $E = B$. Similarly, in case $D > A$, it shall be considered as $D = A$.
Percentage of T&P Deployed = $\Sigma F \times 100$

BHEL SCOPE: -

SN.	PLAN				DEPLOYMENT STATUS		
	Major T&P to be deployed as per work planned for the month	QTY	Deployment Period (in days)	Actual Deployed Quantity	Actual Deployment Period (in days)	REMARKS (Works affected due to non-deployment of T&Ps)	

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 4 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – B-2: PLAN/ REVIEW OF DEPLOYMENT OF MANPOWER FOR THE MONTH OF

Date of Plan/ Review.....

CONTRACTOR'S SCOPE: -

SN.	Area of Work	Category of Labour	No. of Labour required as per category	Deployment Period (in days)	No. of Labour actually deployed	Actual Deployment Period (in days)	REMARKS (Works affected due to non-availability of labour)
			A	B	C	D	

Percentage of Manpower Deployed= $100 \times \frac{\sum(C \times D)}{\sum(A \times B)}$

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 5 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – C: PLAN(PHYSICAL) FOR THE NEXT MONTH i.e.

Date of Plan

SN.	Description of work	Original Planned Quantity	Planned Quantity (excluding shortfalls attributable to contractor till date)	Unit of Measurement	T&Ps Required				Manpower Required		REMARKS (Reasons for difference in Original Planned Quantity w.r.t. Planned quantity to be given)
					Contractor Scope		BHEL Scope		Category of Labour	No. of Labour required as per Category	
					Major T&P to be deployed as per work planned for the month	Quantity	Major T&P to be deployed as per work planned for the month	Quantity			

Note 1: Planned quantity should be based on available/ expected fronts/ inputs in the next month

Note 2: “Original Planned Quantity” shall be as per latest jointly agreed programme between BHEL and Contractor before commencement of work or at the time of latest Time Extension, as the case may be.

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 6 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – D: REASONS FOR SHORTFALL ATTRIBUTABLE TO BHEL IN RESPECT OF PLAN FOR THE MONTH.....

SN.	Description of Work (from Part-A)	Quantities Affected		Reasons for Shortfall attributable to BHEL	Agency responsible for reasons for Shortfall	Remarks (Supporting Documents in respect of agency responsible)
		(Physical Quantity)	Unit of Measu- rement			
1	2	3	4	5	6	7

Note1: Reasons for shortfall shall include non-availability of fronts/ drawings/ materials/ T&P (BHEL Scope)/ clearances etc. and other hindrances for which contractor is not responsible.

Note2: Agency responsible may be BHEL Site/ MUs/ Design Centre/ BHEL Customer/ other Contractors etc.

BHEL
(Sign with name, designation and date)

BANK GUARANTEE FOR PERFORMANCE SECURITY

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ hereinafter referred to as the 'Contractor/Supplier', which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref No.....dated ² valued at Rs.....² (Rupees -----)for <Nature of Work>³ (hereinafter called the 'Contract') and the Contractor having agreed to provide a Contract Performance Guarantee, equivalent to% (.... Percent) of the said value of the Contract to the Employer for the faithful performance of the Contract,

we, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby, irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount Rs ----- (Rupees -----)⁴ without any demur, immediately on a demand from the Employer, .

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment thereunder and the contractors/supplier shall have no claim against us for making such payment.

We the bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We BANK further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER.

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.

2. In Case of Bank Guarantees submitted by Foreign Vendors-

- a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.

- b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
- b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
- b.2** **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
- b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
- b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

**BANK GUARANTEE FOR SECURITY DEPOSIT CUM PERFORMANCE BANK GUARANTEE
BOND**

B.G. NO.

Date

This deed of Guarantee made this ----- day of -----two thousand ---- by <Name and Address of Bank> hereinafter called the "The Guarantor" (which expression shall unless repugnant to the context or meaning thereof be deemed to include its successors and assigns) in favour of M/s Bharat Heavy Electrical Limited (A Govt. of India Undertaking) a company incorporated under the Companies Act, 1956, having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its unit at <Address of Power Sector Region¹> hereinafter called "The Company" (which expression shall unless repugnant to the context or meaning thereof be deemed to include its successors and assigns)

WHEREAS < Contractor's Name and Address> (hereinafter referred to as the Contractor) have entered into a contract arising out of Letter of Intent no. < LOI REF & Date > (hereinafter referred to as "the contract") for < Name of Work > with the company.

AND WHEREAS the contract inter-alia provides that the contractor shall furnish to the company a sum of Rs.----- (Rupees-----) towards security deposit for due and faithful performance of the contract in the form and manner specified therein.

AND WHEREAS the contractor has approached the Guarantor and in consideration of the arrangement arrived at between the contractor and the Guarantor, the Guarantor has agreed to give the Guarantee as hereinafter mentioned in favour of the company.

The Guarantor do hereby guarantee to the company the due and faithful performance, observance or discharge of the Contract by the contractor and further unconditionally and irrevocably undertake to pay to the Company without demur and merely on a demand, to the extent of Rs.----- (Rupees-----) against any claim by the company on them for any loss, damage, costs, charges and expenses caused to or suffered by the company by reasons of the contractor making any default in the performance, observance or discharge of the terms, conditions, stipulations or undertakings or any of them as contained in the contract.

The decision of the company whether any default has occurred or has been committed by the contractor in the performance, observance or discharge of any of the terms, conditions, stipulations or undertakings or any one of them as contained in the contract and / or as to the extent of loss, damage, costs, charges and expenses caused to or suffered by the company by reason of the contractor making any default in the performance, observance or discharge of any of the terms, conditions, stipulations or undertakings or any one of them shall be conclusive and binding on the Guarantor irrespective of the fact whether the contractor admits or denies the default or questions the correctness of any demand made by the company in any Court, Tribunal or Arbitration proceedings or before any other Authority.

The company shall have the fullest liberty without affecting in any way the liability of the Guarantor under this Guarantee, from time to time to vary any of the terms and conditions of the contract or extend time of performance by the contractor or to postpone for any time and from time to time any of the powers exercisable by it against the contractor and either enforce or forebear from enforcing any of the terms and conditions governing the contract or securities available to the company and the Guarantor shall not be released from its liability under these presents by any exercise by the company of the liberty with reference to the matters aforesaid or by reasons of time being given to the contractor or any other forbearance, act or commission on the part of the company or any indulgence by the company to the contractor or any other matter or thing whatsoever which under the law relating to sureties would, but for this provision have the effect of so releasing the Guarantor from its liability under this guarantee.

The Guarantor further agrees that the Guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the contract and its claim satisfied or discharged and till the company certifies that the terms and conditions of the contract have been fully and properly carried out by the contractor and accordingly discharges this Guarantee, subject however, that the company shall have no claim under this Guarantee after ----- i.e. (3 months more than the present date of validity of Bank Guarantee unless the date of validity of this Bank Guarantee is further extended from time to time, as the case may be) unless a notice of the claim under this Guarantee has been served on the Guarantor before the expiry of the said period in which case the same shall be enforceable against the Guarantor notwithstanding the fact that the same is enforced after the expiry of the said period.

**BANK GUARANTEE FOR SECURITY DEPOSIT CUM PERFORMANCE BANK GUARANTEE
BOND**

The Guarantor undertakes not to revoke this Guarantee during the period it is in force except with the previous consent of the Company in writing and agrees that any liquidation or winding up or insolvency or dissolution or any change in the constitution of the contractor or the Guarantor shall not discharge the Guarantor's liability hereunder.

It shall not be necessary for the company to proceed against the contractor before proceeding against the Guarantor and the Guarantee herein contained shall be enforceable against them notwithstanding any security which the Company may have obtained or obtain from the Contractor shall at the time when proceedings are taken against the Guarantor hereunder be outstanding or unrealized.

Notwithstanding anything contained herein before, our liability under the Guarantee is restricted to Rs.-----
- (Rupees-----). Our guarantee shall remain in force until -----, i.e. (the present date of validity of Bank Guarantee unless the date of validity of this Bank Guarantee is further extended from time to time) unless a claim or demand under this guarantee is made against us on or before ----- (3 Months more than the validity date) we shall be discharged from our liabilities under this Guarantee thereafter.

Any claim or dispute arising under the terms of this documents shall only be enforced or settled in the courts of at < **Name of place²** > only.

The Guarantor hereby declares that it has power to execute this guarantee and the executant has full powers to do so on behalf of the Guarantor.

IN WITNESS whereof the ----- (Bank) has hereunto set and subscribed its hand the day, month and year first, above written.

(Name of the Bank)

Signed for and on behalf of the Bank
(Designation of the Authorized Person Signing the Guarantee)

(Signatory No.-----)

DATED:

SEAL

Notes :

1. **Address of Power Sector Regions (inviting the Tender)** is as below:
 - PSNR : Bharat Heavy Electricals Limited, Power Sector Northern Region, HRDI & PSNR Complex, Plot No 25, Sector 16-A, Noida – 201 301 (Uttar Pradesh)
 - PSER : Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700 091
 - PSWR: Bharat Heavy Electricals Limited, Power Sector Western Region, Shree Mohini Complex, 345 Kingsway, Nagpur 440 001
 - PSSR: Bharat Heavy Electricals Limited, Power Sector Southern Region, 690, Anna Salai, Nandanam, Chennai 600 035
2. **Name of place (for jurisdiction of Courts)** is as below:
 - PSNR : Delhi
 - PSER : Kolkata
 - PSWR: Nagpur
 - PSSR : Chennai
3. The BG shall be executed on non-judicial stamp papers of adequate value procured in the name of the Bank in the State where the Bank is located.
4. The BG is required to be sent by the executing Bank directly to BHEL at the address where tender is submitted / accepted under sealed cover.

BANK GUARANTEE FOR RELEASE OF AMOUNTS WITHHELD/LIQUIDATED DAMAGES AMOUNT

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited ¹(hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) incorporated under the having its registered office at _____ ¹(hereinafter referred to as the 'Contractor', which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref No.....dated ²valued at Rs.....(Rupees -----) for <Nature of Work>³(hereinafter called the 'Contract')

The Contractor as per Contract should have completed the work/ supplies under the contract by.....(date). As per terms and conditions of the Contract, the Employer is entitled to levy Liquidated Damages (LD) for delays and the Employer has withheld an amount of Rs by way of LD as per the Contract. Now, on the request of the Contractor, the Employer having agreed to release the amount of Rs.....withheld from the Contractor's invoices as Liquidated damages under the terms and conditions of the Contract on production of a Bank Guarantee for Rs. _____ (Rupees.....only) ⁴

We, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount of Rs ----- (Rupees -----) without any demur, merely on a demand from the Employer

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment thereunder and the contractors/supplier shall have no claim against us for making such payment.

We the bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We BANK further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's/ Supplier's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, ... Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER.

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ *DATE OF EXPIRY OF CLAIM PERIOD*

⁷ *BG AMOUNT IN FIGURES AND WORDS.*

⁸ *VALIDITY DATE*

⁹ *DATE OF EXPIRY OF CLAIM PERIOD*

Note:

- 1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.**
- 2. In Case of Bank Guarantees submitted by Foreign Vendors-**
 - a. From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2** In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

BANK GUARANTEE FOR SUPPLY FREE ISSUE MATERIAL.

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier).having its registered office at _____¹ (hereinafter referred to as the 'Contractor/Supplier/Fabricator' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref. No.....dated ² valued at Rs.....(Rupees -----) for <Nature of Work>³ (hereinafter called the 'Contract')

and, the Employer having agreed as per the terms and conditions of the Contract to supply free issue material costing Rs._____ for the manufacture/fabrication of the equipment at the Contractor's site on on furnishing a Bank Guarantee for Rs._____ (Rupees.....)⁴ in the manner hereinafter specified for the due safeguard of the free issue material,

we, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount of Rs ----- (Rupees -----) without any demur, merely on a demand from the Employer, .

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Contractors/Supplier shall have no claim against us for making such payment.

We the Bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor/Supplier/ Fabricator and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's/Supplier's/ Fabricator's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/ Supplier/ Fabricator but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER .

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.
2. In Case of Bank Guarantees submitted by Foreign Vendors-
 - a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2 **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3 The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4 The BG should clearly specify that the demand or other document can be presented in electronic form.

PROFORMA OF BANK GUARANTEE FOR EARNEST MONEY
(On non-Judicial paper of appropriate value)

Bank Guarantee No.....

Date.....

To

(Employer's Name and Address)

.....

Dear Sirs,

In accordance with the terms and conditions of your Invitation for Bids/Notice Inviting Tender No.....¹(Tender Conditions) M/s. having its registered office at ² (hereinafter referred to as the '**Tenderer**'), is submitting its bid for the work of..... for.....³. at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091.⁴(name of the Employer)

The Tender Conditions provide that the **Tenderer** shall pay a sum of Rs as Earnest Money Deposit in the form therein mentioned. The form of payment of Earnest Money Deposit includes Bank Guarantee executed by a Scheduled Bank.

In lieu of the stipulations contained in the aforesaid Tender Conditions that an irrevocable and unconditional Bank Guarantee against Earnest Money Deposit for an amount of ⁵ is required to be submitted by the Tenderer as a condition precedent for participation in the said Tender and the Tenderer having approached us for giving the said Guarantee,,

we, the[Name & address of the Bank] having our Head Office at(hereinafter referred to as the Bank) being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer without any demur, merely on your first demand any sum or sums of Rs. ⁵(*).....without any reservation, protest, and recourse and without the beneficiary needing to prove or demonstrate reasons for its such demand. Any such demand made by the 'Employer' shall be

conclusive and binding on us irrespective of any dispute or difference raised by the Tenderer.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Tenderer shall have no claim against us for making such payment.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Tender or to extend the time of submission of bids from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Tenderer and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Tendered or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Tenderer or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Tenderer and notwithstanding any security or other guarantee that the Employer may have in relation to the Tenderer's liabilities.

This Guarantee shall be irrevocable and shall remain in force upto and including.....⁶ and shall be extended from time to time for such period as may be desired by the Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Tenderer but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms hereof. However, unless a demand or claim under this Guarantee is made on us in writing on or before the ⁷ we shall be discharged from all liabilities under this Guarantee.

We, ... Bank lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....5.....
- b) This Guarantee shall be valid up to 6
- c) Unless the Bank is served a written claim or demand on or before _____⁷ all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

For and on behalf of

(Name of the Bank)

Date.....

Place of Issue.....

¹ *Details of the Invitation to Bid/Notice Inviting Tender*

² *Name and Address of the Tenderer*

³ *Details of the Work*

⁴ *Name and Address of BHEL Unit/Division/Region (Already filled up)*

⁵ *BG Amount in words and Figures*

⁶ *Validity Date*

⁷ *Date of Expiry of Claim Period*

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date. As per Works Policy, the Bank Guarantee shall be valid for at least six months.

2. In Case of Bank Guarantees submitted by Foreign Vendors-

- a. From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
- b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**

 - b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter-Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2** **In case, Foreign Vendors intend to provide BG from Overseas Branch** of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

RTGS DETAILS OF BHEL

Form for getting payment through RTGS (Real Time Gross Settlement)

01. Name of Vendor **BHARAT HEAVY ELECTRICALS LTD.**
02. Address **~~BHEL~~ BHEL HOUSE, SIRI FORT, N.DELHI**
03. Vendors Bank A/c Name **BHARAT HEAVY ELECTRICALS LTD.**
04. Vendors Bank A/c No. **11107800029**
05. Name of Bank **STATE BANK OF INDIA**
06. Name of Branch **COMMERCIAL BR., SALT LAKE, SECTOR-V**
KOLKATA
07. Branch Phone No. **033-23575666**
08. City **KOLKATA**
09. IFSC Code of the Branch **SBIN 0004289**

The charges if any for payment through RTGS may be recovered from the Bill submitted by us.

Signature of Authorised Representative of Vendor
के. के. कोआरी / K. K. Coari
उप महाप्रबंधक (वित्त) / Dy. General Manager (Fin)
बी. एच. ई. एल. : पी.एस.ई.आर. : कोलकाता - 700 091
BHEL: PSER / Kolkata-700 091

Confirmation by Banker
with office seal



Note : Incorrect information will create Accounting complications and payment will be delayed

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 1 OF 62

CONTENT

CLAUSE NO	DESCRIPTION
1.0	PROJECT SYNOPSIS AND GENERAL INFORMATION
2.0	SITE VISIT
3.0	NAME OF WORK
4.0	SCOPE OF WORK
5.0	GENERAL SCOPE OF WORK
6.0	GENERAL TECHNICAL REQUIREMENTS (CODES AND STANDARDS)
7.0	GENERAL SERVICES TO BE RENDERED BY THE BIDDER
8.0	GENERAL GUIDELINES FOR FIELD ACTIVITIES
9.0	DEVIATIONS/CLARIFICATIONS
10.0	DEWATERING
11.0	QUALITY CONTROL & QUALITY ASSURANCE
12.0	QUALITY ASSURANCE PROGRAMME
13.0	AREA REQUIREMENT
14.0	PROJECT MANAGEMENT/ CONSTRUCTION MANAGEMENT
15.0	LIQUIDATED DAMAGE
16.0	HEALTH SAFETY & ENVIRONMENT
17.0	SPECIFIC REQUIREMENTS FOR ISO 9002
18.0	LAND
19.0	WATER
20.0	ELECTRICITY
21.0	CONSTRUCTION OF TEMPORARY OFFICE, BIDDER'S OWN STORES ETC
22.0	CONSUMABLE
23.0	TEST CERTIFICATE FOR T&P
24.0	MMD
25.0	ISSUE OF T&P BY BHEL
26.0	TOOLS & PLANTS (TO BE PROVIDED BY CONTRACTOR)
27.0	FACILITIES TO BE PROVIDED BY THE SUCCESSFUL BIDDER
28.0	RESPONSIBILITIES WITH REGARD TO EMPLOYMENT OF LABOUR, ETC
29.0	RECONCILIATION OF BHEL ISSUED MATERIALS
30.0	INSURANCE
31.0	SECURITY DEPOSIT, PERFORMANCE BOND & FINAL BILL
32.0	COMPLETION PERIOD
33.0	CONSTRUCTION SCHEDULE
34.0	CERTIFICATE TOWARDS COMPLETION
35.0	EXTENSION OF TIME FOR COMPLETION
36.0	MOBILIZATION ADVANCE/ INTEREST BEARING RECOVERABLE ADVANCE
37.0	OVER RUN CHARGES
38.0	PRICE VARIATION COMPENSATION (PVC)/ ESCALATION
39.0	TAXES & DUTIES, ETC. (SUPPLY & SERVICE)
40.0	TERMS OF PAYMENTS
41.0	CONTRACT PRICE
42.0	GUARANTEE
43.0	DELETED
44.0	REVISION ON ACCEPTED CONTRACT RATE
45.0	EXTRA WORKS
46.0	OTHER TERMS
47.0	TERMINAL POINTS
48.0	ANNEXURE-I (TENTATIVE LIST OF ITEMS/WEIGHT OF MECHANICAL/ELECTRICAL/C&I TO BE DISMANTLED & RE-ERECTED FOR DE NOX PACKAGE AT DVC-RAGHUNATHPUR TPS U#1&2 (2X600MW).
49.0	ANNEXURE-II (TENTATIVE LIST OF MECHANICAL ITEMS/ WEIGHT FOR DE NOX PACKAGE AT DVC-RAGHUNATHPUR TPS U#1&2 (2X600MW).
50.0	ANNEXURE-III (TENTATIVE LIST OF C&I/ELECTRICAL ITEMS FOR DE NOX PACKAGE AT DVC-

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 2 OF 62

	RAGHUNATHPUR TPS U#1&2 (2X600MW)
51.0	ANNEXURE-IV (TENTATIVE WEIGHT OF ITEMS FOR MATERIAL HANDLING FOR DE NOX PACKAGE AT DVC-RAGHUNATHPUR TPS U#1&2 (2X600MW)
52.0	ANNEXURE-V (Tentative list of T&P to be provided by Contractor)
53.0	ANNEXURE-VI (Tentative list of Consumables to be provided by Contractor)
54.0	ANNEXURE-VII (SPECIFICATION OF PAINTING WORK)
55.0	ANNEXURE-VIII (TENTATIVE UNIT WISE COMPLETION SCHEDULE FOR FOR DE NOX PACKAGE AT DVC-RAGHUNATHPUR TPS U#1&2 (2X600MW)
56.0	ANNEXURE-IX (TENTATIVE UNIT WISE MANPOWER REQUIREMENT FOR DE NOX PACKAGE AT DVC-RAGHUNATHPUR TPS U#1&2 (2X600MW)

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 3 OF 62

These special conditions shall be construed as part of tender document and shall be read along with general conditions of contract (GCC) and other volumes of tender. In case of any conflict or inconsistency between GCC, other volumes and these Technical conditions contract (TCC), the same shall be brought out by the bidder in writing to BHEL for clarification with stipulated date & before due date of submission of offer, failing which most stringent interpretation/ clause in favour of BHEL shall be adopted and the same shall be binding to the bidder.

CL. NO	DESCRIPTION
1.0	PROJECT SYNOPSIS AND GENERAL INFORMATION Name of the Owner : DVC -RTPS Address : RAGHUNATHPUR THERMAL POWER STATION(RTPS),PH-I,U#1&2 (2X600 MW),DVC, DISTRICT-PURULIA, W.B, INDIA. Nearest Railway Station : Joychandi Pahar Railway Station is situated about 18km from the plant site. Nearest Road : Raghunathpur –Asansol; State Highway . Asansol ,the nearest major Town, is about 45-km from project site. Nearest Airport : The nearest airport is Kazi Nazrul Islam which is about 83 Km from site
2.0	SITE VISIT The bidder should visit project site and acquire full knowledge & information about the conditions prevailing at site and in & around the plant premises, together with all statutory, obligatory, mandatory requirements of various authorities before submission of offer. In line with the above, site visit confirmation will be required to be submitted by the bidder with nthe technical bid.
3.0	NAME OF WORK PROJ-III: Receipt, unloading, storage,material handling, material transportation(store/ yard to site),Dismantling, New Material Erection, Re-Erection of Old Items, Modification of existing Items, Restoration, Commissioning, Painting(supply & application)Testing & PG Test etc.of Combustion modification system for Nox mitigation of U#1&2 (2X600MW), AT DVC-RAGHUNATHPUR TPS

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 4 OF 62

4.0	SCOPE OF WORK
4.1	BROAD DETAILS
4.1.1	The job includes modification at <u>AT DVC-RAGHUNATHPUR TPS U#1&2 (2X600MW)</u> in the Burner fuel nozzles (coal / oil/ air/ cc-ofa), Laying of duct from Windbox to BOFA Panels (above burners) & its control instrumentation work. Modification in floors to carry out aforesaid work. Detailed scope is mentioned below, however it may be noted that below mentioned scope of work is only a guide line if any additional work which is not written below and required for carrying out for completion of work is to be done without any additional extra cost.
4.1.2	Bidders are strongly advised to inspect the site, examine and obtain all information required and satisfy himself regarding all matters. The price quoted by the bidder shall be based on his knowledge and judgement of the conditions and hazards involved. Ignorance of site conditions shall not be accepted as basis for any claim for compensation or will not be considered a reason under force majeure. This is a major and skilled job, it requires precision and timely preparation before the start of job. contractor is advised to completely mobilize the site at-least 01 month before official date of shutdown for pre shutdown jobs like Planning of job, fabrication of ducts, dismatling / erection of structural floors, arrangements of T&P, gate pass preparation, fixing of winch and chain pulley blocks, removal of fouling structure etc.
4.1.3	<u>MECHANICAL ITEMS</u> a) Modification of Wind Box with BOFA panel. • New/ modified Re-designed Wind box including new coal, oil and air nozzle tips for all four corners. • New /Re-designed Tilting Tangential Burner Assembly. • Burner Tilt Power cylinders (based on the assessment of actual condition vendor may reuse the existing items also • Modification in coal piping, coupling & its supports. • Strengthening/ modification of structure as required for carrying out combustion modification job (if required) • Burner Panel matching with frames (water wall panel for fitting new redesigned tangential tilting burner assemblies and windbox). • BOFA panel matching with frames (water wall panels for fitting in the new BOFA compartments). • SADC Pneumatic actuators with Positioners & Position transmitters. • BOFA Compartment with dampers and power operated actuators. • Wind box connecting duct along with Expansion bellows between wind box connecting duct and wind box. • Instrumentation Air piping for all pneumatic actuators and instruments being replaced, refurbished under this package. b) Dismantling/Modification of existing Wind box assembly, Platforms/floors/stairis, Ducts, Pr Parts, coal burner, Coal nozzle tip, coal piping, hangers etc. c) Preservation of Scanners and HEA Ignitor and critical equipment which can be reused again shall be cleaned and stored in proper shed and shall be reused/ re erected/restored. d) Necessary access, platforms, walkways, handrails, staircase, ladders and gratings etc. for proper approach shall be made by vendor for all equipments, instruments (for newly added items as per scope of supply of Combustion modification) including required during commissioning and testing and accessories. e) Necessary handling/lifting arrangement with monorail and hoist alongwith suitable platform & approach f) Insulation and Cladding. g) Repair / replacement/modification of water wall tubes for installation of Separated over fire air damper/panel (part of scope of combustion modification only), assistance for hydro test(hydro test is in Customer's Scope),attend failures during hydro test. h) Vendor need to take approval from Boiler Directorate/Bengal under Section 392 of IBR. Vendor has to co-ordinate with Boiler Directorate/Bengal for approval of Drawings for the subject work. Arrangement for inspections/approval through Boiler Directorate/West Bengal upto hydro test/completion of work.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 5 OF 62

	i) 100% RT of Pr Parts Weld Joints. j) All associated Structural works. k) Existing features where are interfering with the new arrangement of BOFA are to be suitably relocated at site to the extent required. l) Duct stiffners and insulation at existing items to be adjusted at site for required clearance. m)Dismantling of Mechanical Items like Floors/Platforms/stairs/Ducts/Pr Parts/Soot Blower/Buck stays/Insulation etc, Re-Erection/Re-use of old dismantled items/modification as per drawing/as instructed by Engr I/C.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 6 OF 62

4.1.4	Control & Instrumentation/Electrical: Contractor's scope shall include but not limited to the following: - • Dismantling of C&I/Electrical Items like Instruments/cables/cable trays/JB's/Light/Light Fittings/Soot Blower Connections etc & Preservation of same for re-use if required, • Erection, Testing & Commissioning of Pneumatic actuators with positioners and I/P converters for BOFA dampers • Erection, Testing & Commissioning of BOFA tilt power cylinders with positioners and shear pin failure indicator and alarm. • Erection, Testing & Commissioning of Air Filter Regulator and pressure switches/ transmitters in BOFA signal airline. • Erection, Testing & Commissioning of Flow elements (Aerofoil or as per the standard and proven practice of Contractor) with flow transmitter in BOFA secondary air duct • Erection, Testing & Commissioning of Solenoids and pneumatic tubing for auto purging of BOFA flow element. • Power/Control/Instrumentation cables Laying & termination for Powered-up,cable splicing, Control & interconnection/ integration of C&I instruments/equipment of system with existing unit DDCMIS. • Erection, Testing & Commissioning LIE/LIR, including Erection, Testing & Commissioning Instrument(s) related to the LIE/LIR with necessary erection hardware, impulse tubing/ piping,fitting, racks, enclosures, junction boxes etc. for C&I. • Erection of Branch cable trays up to field Junction boxes. • Erection of Instrument air piping from the existing instrument airline to existing and new equipment/instruments. • Erection, Testing & Commissioning of Instrument air distribution SS tubing, fittings for SADC /BOFA actuators, Corner Nozzle valves, HEA ignitors, Burner Tilt Power cylinders and BOFA Tilt Power cylinders. • Erection, Testing & Commissioning of Two (02) Sets of CO analyzers at Economizer outlets of each unit. Tapping points for CO analyzers, suitable for analyser mounting, shall be erected at Economizer outlet ducts. • Erection, Testing & Commissioning of Microprocessor based electronic positioners with all the pneumatic operated control valves/ dampers for burner-tilt application. Microprocessor based electronic positioners with remote positioner units shall be provided. However, pneumatic positioners along with I/P converters are also a part for SADC BOFA dampers. • Erection of required cable tray(s) along with supporting stuctures to be done. Cable trays may be different sizes & kind as per drawing. • Cable Laying, dressing, tagging, glanding, ferruling, terminating at both end,cable splicing, etc. as applicable including continuity checking & IR Value checking (if required) to be done towards commissioning of C&I & Electrical system/items realted to Nox mitigation system. • All associated Electrical, Control & Instrumentation works realted to Nox mitigation of U#1&2, (2X600MW) at DVC -RAGHUNATHPUR STPS to be carried-out under the scope of work. Note: - Dismantled HEA ignitors, Flame scanners, Burner tilt actuators & SADC actuators along with I/P converters, 1/4" Air Filter Regulator and pressure switches etc. shall be re-used as per the drawing / site engineer instruction.
4.2	DETAILS SCOPE OF WORK
4.2.A	Dismatling activities and items(MECHANICAL/ELECTRICAL/ C&I) to be retained properly & to be re-used/re-erected/alignment/modified/commissioned/painting(supply & application)/testing etc.
	The contractor shall carry out Dismantling, Removal, Shifting of any obstructing Pr Parts, structures, buck stay, pipe lines, cables & cable trays, boiler lighting arrangement,wall blowler system at BOFA panel elevation ,facilities etc. upkeepment of the items & shifting from store to site,for Re-Use/Re-Erection/Modification as per drawing/Instruction of Engr I/C.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 7 OF 62

A. Following Items to Be dismantled, preserved & to be re-used/ re-erected/ modified/ commissioned(as required):-

MECHANICAL ITEMS:

- Insulation cladding, wool, refractory etc as required.
- Structure components like Platform, hand rails, floor gratings, stair cases, ladders etc of Different Elevation as required.
- Existing Wind box assembly, coal burner, Coal nozzle tip, coal piping, hangers etc
- Misc structural items(channel, Angles, Beams etc.)
- Wall blower,soot blower, its piping as required.
- Any other piping as required.
- Duct, duct support, expansion below etc as required.
- Buckstay beams and its associated members like leveller guide, scalloped bar, pin etc.
- Water wall panels/tubes/ bends as required.
- Coal Burners.
- Burner Nozzles (air/coal/oil).
- Coal Pipe Bends/elbows as required.
- Removal / dismantling of FIE (Fuel Inlet Elbows = 36 Nos,it may vary , as per drawings) for all four corners at all elevation. Transporatation of FIE's to designated location as decided by BHEL/ Customer
- Removal of Oil Guns, Gun Guide Pipes, HEA Ignitor, its fittings & its guide pipes, Scanner & their guide pipes. Proper care shall be given while dismantling as these items shall be reused, Oil Gun Vice assy & Rack, Air Cooled Oil gun Assemblies, oil gun mainmtenance box, oil gun vice assy an rack.
- Burner station skid assemblies.
- Corner station piping, valves & fittings.
- Coal piping, coal pipe coouplings, supports etc(as required).
- Buckstays in the wind box and BOFA locations.
- Any other piping, supports, valves and fittings etc.
- Removal of all Coal Nozzles from coal compartment for all four corners.Replacement of Nozzle tips with new tips & inert back the nozzles to burners coal compartments.
- Instrument Air, Service Air Line as required.
- Any other mechanical items not mentioned above but required to be dismantled & re-erected/re-used/modified/Alignment/painting for completion of the sytem, same to be carried out by vendor as per instruction of Engr I/C without any extra cost

C&I & ELECTRICAL ITEMS :

- Approximately, 44 Nos. Flame Scanner Head assemblies, Cooling air piping, Scanner hoses etc. (Quantity may vary, as per erection drawings).
- Furnace flame viewing camera(s)/system.
- ASLD(s) etc.
- SADC(s) and Burner tilt power cylinder(s)/actuator(s).
- Dismantling of Cable trays and cables, which are required to be eatsblied the DE-NOX system duct panels etc.
- Existing Pressure gauge(s) in Corner skid for oil and atomizing medium.
- Wind box to Furnace DP Transmitter(s) and related impulse piping.
- Tapping point(s) for any Instrument in water wall.
- Field cables and Junction boxes in Boiler Operating Floor/Firing Floor/ air and flue gas path as required to be eatsblied the DE-NOX system.
- Existing SADC I/P converter(s), 1/4" Air Filter Regulator(s) in existing SADC(s) signal airline, Existing SADC signal air Line pressure switch(s).
- Illumination items.
- Existing secondary air flow measurement element(s) and transmitter(s) along with cable(s) & accssories.
- Existing corner oil skid(s), instruments in oil line(s), trip valve(s) and control valve(s) along with all

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 8 OF 62

	associated cable(s). ● Field JB(s) and related impulse piping. ● All existing cable(s) & Cable tray(s) associated with existing SADC actuator I/P(s), pressure switch(s) and SADC(s)/FSSS panel(s) (including field cable(s) till local JB(s)). ● All existing cables between existing corner oil skid, HEA ignitors, oil gun, LGM box and FSSS panel etc. (including field cables till local JB). ● All existing Power, Control & Instrumentation cables for Soot Blowers. ● Existing instruments in air and flue gas path, associated cabling, field JB's and Impulse piping. ● Erection, installation, cable tray erection, cable laying, cable splicing, cable dressing, cable glanding, cable termination, ferruling, tagging, applicable testing, commissioning of C&I & Electrical system/items. ● Any other C&I/Electrical items not mentioned above but required to be dismantled & re-erected/re-used/modified for completion of the system, same to be carried out by vendor without any extra cost as per drawing / instruction of Engr I/C. Note: - The above work includes Erection, Testing & Commissioning, Laying, dressing, tagging, glanding, ferruling, terminating at both end, etc. as applicable including continuity checking & IR Value checking (if required) to be done towards commissioning of C&I & Electrical system/items related to Nox mitigation system. The above item list are tentative only. B. Work to be done as under:- i) Dismantling, Removal, Shifting of any obstructing items (Mechanical, C&I, Electrical) as mentioned above for De-Nox system. ii) Upkeepment/preservation of the items for re-use, re-erection, modification, welding, alignment, laying, termination, splicing, commissioning, testing, PG Test as per instruction of Engr I/C/Drawing as reqd. iii) Relaying/re-erection of Instrument air, service air, other dismantled pipe lines, lighting system, cable(s), cable tray(s), termination, splicing, jb's etc. iv) Disposal of scrap to the scrap yard or as instructed by Engr I/C inside plant premises. v) Erection testing commissioning of Instrument air distribution SS tubing, fittings for SADC actuators, Corner Nozzle valves, HEA ignitors, Burner Tilt Power cylinders Power cylinders. vi) Dismantling/Modification of existing Wind box assembly, coal burner/nozzle, Coal nozzle tip, coal piping, hangers etc. vii) Preservation of Scanners and HEA Ignites and critical equipment which can be reused again shall be cleaned and stored in proper shed and shall be reused/ re erected/restored/commissioning/alignment/testing along with cabling, termination, splicing, testing etc as applicable. viii) Restoration/re-erection of all removed structure, floor grills, air lines, hand rails, Coal Burners/Nozzles, Re-erection of removed insulation and cladding with the help of hooks and retainer plates. Existing access openings/observation doors are to be retained. Restoring JB, cable, cable tray as and where applicable. Dismantling & Removal of scaffolding and other temporary structures & arrangements made for handling after completion of work & Transportation of removed material and other scraps generated during the work to disposal yard/handing over the same to DVC customer. Any other alteration which is done for modification is to be restored in original position without any extra charge. If any modification of floor/ bracing is required to successfully complete this BOFA modification job which is not mention here, same has to be carried out with out any extra cost. ix) Existing Floor at 10.20 Mtrs, to be extended suitably by 500 mm for CCTV camera approach. x) Existing Floor at 51.2 Mtrs, & other Elevations to be modified to clear BOFA assembly & Ducting. xi) Modification of Existing Floors as per drawing/guidance of Engr I/C. xii) Existing Buckstay at El 53.70 Mtrs to be modified at corners. xiii) Horizontal Bracings interfering with BOFA system to be modified to clear BOFA & Ducting. xiv) Duct Stiffeners & Insulation at existing items to be adjusted locally at site for clearance.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 9 OF 62

	xv) All the existing features which are interfering with the proposed arrangement of BOFA are to be suitably relocated at site to the extent required. xvi) Supply & application of paints for the re-erected/re-used/modified items. xvii) Fabrication of Floors/benches (where ever required) xviii) Vendor need to take approval from Boiler Directorate/West Bengal under Section 392 of IBR. Vendor has to co-ordinate with Boiler Directorate/BWest Bengal for approval of Drawings for the subject work. Arrangement for inspections/approval through Boiler Directorate/West Bengal upto hydro test/completion of work. xix) 100% RT of Pr Parts Weld Joints <u>Tentative quantity of work/Unit:</u> • Approx weight to be dismantled will be 60 MT/Unit. • Approx weight to be re-erected/re-used will be 40 MT/Unit. Note: Quantity mentioned above may vary to any extent, no extra payment shall be made for quantity variation to complete NOx modification job.
4.2.B	SHIFTING OF MATL FROM STORE TO SITE, ERECTION, ALIGNMENT, WELDING, NDT, PAINTING (SUPPLY&APPLICATION), TESTING, COMMISSIONING & PG TEST ETC.WORK OF NEWLY SUPPLIED MECHANICAL ITEMS.
	Tentative weight of new materials envisaged for erection is 254.484 MT per Unit (Refer Annexure –II of TCC). Quantity may be increase or decrease as per site requirement. Payment will be made on prorata rate basis as per actual quantity.
4.2.B1	TENTATIVE PRE SHUTDOWN / PREPARATORY WORKS
B1.1	All Necessary arrangements are to be made for handling, lifting, shifting, erection, placement, assembly, matching, alignment, supporting, welding, cutting, grinding, drilling, DPT, Radiography, Heat Treatment and other associated works etc. for the materials to be erected/dismantled. Including providing of all required Manpower, T&Ps, MMDs, Consumables and Other Materials.
B1.2	All necessary arrangements are to be made by the contractor for transportation of materials including providing of all required Manpower, Hydras, Trailers, Tractors and other means of transportation along with operators & fuel.
B1.3	Removal & replacement of structural floors, beams, bracings, cable trays buckstays or any other structure and system fouling with duct routing. BOFA Duct laying from Hot air duct (Left & Right) near windbox (El 37.30 Mtr tentatively) to BOFA assembly above Burner area (El 54.36 Mtr tentatively). Relocation of stairs.
B1.4	Suitable modification of fouling structural floors at Elevation (tentative) 51.20 Mtr & other elevations as per BHEL requirement.
B1.5	Modification of structural floor to accommodate New ducting (Hot air duct to BOFA Panels) system as per BHEL drawing/Instruction of Engr I/C.
B1.6	Placement, erection of structural beams, bracings, floor grills, hand rails, pipes etc. Erection, fitup & welding of structures & platforms. Self drilling screw for floor grills is in subcontractor scope.
B1.7	Erection & welding of structure as per BHEL standards & quality plan. LPI of all welded beams, bracings. Supply of all consumables including Welding electrodes is in subcontractor scope.
B1.8	Modification of Stair & Floor as per drawing/as required.
B1.9	Erection & Placement of Benches required for operation for all newly installed systems.
B1.10	Area cleaning for the placement of duct pieces before assembly. Pre assembly of Duct for BOFA system. Seal Welding of duct as per BHEL norms. Checking of dimensions as per quality plan.
B1.11	Erection of temporary platforms at boiler floors for duct assembly work.
B1.12	Routing & Erection of Duct from BOFA System to Hot secondary air duct (Left & Right side of furnace) to the extent possible before shutdown.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 10 OF 62

B1.13	Erection of duct supports, guides, hangers as per BHEL drawing & site requirement.
B1.14	Erection of Access doors & providing acces structural platforms as per drawing & site requirement.
B1.15	Erection of Junction Box (JB's) near the BOFA Panels. Erection of Cable trays & Laying of Cables to the extent possible during preshutdown.
B1.16	Arrangement of Scaffolding materials & erection of scaffolding for outside furnace area as required.
B1.17	Arrangement of sufficient Illumination for erection work to be arranged by vendor. Note: 24 V DC lights with transformer to be arranged by vendor for confined area work.
B1.18	Fabrication of Floor members (where ever required) by cutting standard size structural members without any extra cost.
B1.19	Fabrication of duct, duct struss (where rever required) from standard size duct plate, strucres etc without any extra cost.
4.2.B2	TENTATIVE SHUT DOWN WORKS
4.2.B2.a	SCAFFOLDING
B2.a.1	Arrangement of scaffolding materials & erection of same(whenever required) in outside boiler area is in vendor Scope. However, for inspection/Commissioning of new BOFA panel & existing Burner Nozzles from inside furnace, if any approach platform is required same has to be made by vendor within quoted price.
4.2.B2.b	Windbox / Burner
B2.b.1	Locking of Coal pipes before removal of Elbow / Gate valve from coal pipes.
B2.b.2	Installation of New or dismantled FIE (Fuel Inlet Elbow) as decided by BHEL. Replacement of coal pipe couplings /gaskets.
B2.b.3	Transporatation & handing over these items to BHEL / customer stores.
B2.b.4	Replacement of Oil / Air / End Air /CC-OFA nozzle tips for all four corner burners including modification in winbox compartment to suit new desgined nozzles. Reinstallation of Guidepipes of Oil/HEA/Scanner. Scaffolding required to complete job shall be in subcontractor scope.
B2.b.5	Modification in the windbox SADC dampers by welding of locking plates, shielding plates as per BHEL Drawing. After modification ensure free rotation of dampers in all compartments.
B2.b.6	Scanner Air header modification / Rerouting as per site requirement.
B2.b.7	if any modification required in new nozzle tips at site due to difficulty in reinstallation of guide pipe of OIL/HEA/Scanner same to be executed at site by agency without any cost impact
4.2.B2.c	DUCT (Hot Air to BOFA) , Buckstay,Insulation & Structures
B2.c.1	Routing & Erection of Duct from BOFA System to Hot secondary air duct (Left & Right side of furnace) as per drawing & site condition.
B2.c.2	Supporting of duct as per drawing & site requirement.
B2.c.3	Erection of duct expansion bellows & supporting as per drawing & site condition.
B2.c.4	Buckstay (front & rear) to be relocated with & modified to link with BOFA Assy (Tentative EL51000). Buckstay (Left & Right) at El 47075(Tentative) to be removed as per drawing.
B2.c.5	Relocation of Wall blowers at El 46050 (tentative) on left & right side (Approx.5 Nos Each side) to be lowered by 500(approximate) mm to clear BOFA ducting. Rerouting of wall blowers steam pipe header & its supports.
B2.c.6	Gas / Air tightness test of Duct as per BHEL procedure.
B2.c.7	Welding of insulation fixing components at ducts, fixing of mineral wool as per BHEL standards.
B2.c.8	Laying of Insulation, Refractory & Cladding as per BHEL norms. Application of castable & pourbale refractory for buckstay, wall blowers, peepholes, acces doors, burners ww transition tubes etc.
B2.c.9	Additional floors are to be added at EL (tentatively) 44850, 48350, 51850 & other Elevations as per Drawing/ Instruction of Engr I/C. Floor items wherever required to be fabricated from standard size structure materials, without any extra cost.
B2.c.10	Kersone test to be carried out for duct welding.
B2.c.11	Fabrication of duct, duct struss (whereever required) from standard size duct plate, strucres etc without

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 11 OF 62

	any extra cost.
4.2.B2.d	BOFA Panels/Pr Parts
B2.d.1	Transporataion of BOFA panels to site from stores.
B2.d.2	Cutting of Water wall above burner to accommodate new BOFA system. Fitup of WW tubes to BOFA Panel tubes. Welding of HP Joints by IBR welder.
B2.d.3	Vendor need to take approval from Boiler Directorate/Bengal under Section 392 of IBR. Vendor has to co-ordinate with Boiler Directorate/Bengal for approval of Drawings for the subject work. Arrangement for inspections/approval through Boiler Directorate/Bengal upto hydro test/completion of work.
B2.d.4	100% Radiography of the new HP Joints as per IBR including necessary, rectification of the defects observed during radiography. Pre Heat & PWHT (if required).
B2.d.5	Connection welding of BOFA system to newly erected duct. Supporting of BOFA system.
B2.d.6	Erection of power cylinders for New BOFA system at four elevation in all for corners. Stroke adustment / tuning of power cylinders. Adjustment / tuning of existing SADC power cylinders.
B2.d.7	Laying of Instrument air line from existing header to all newly installed power cylinders. & other installed systems as per site requirement.
B2.d.8	Approch Platform erection. Erection & placement of benches for operating the installed instruments / systems as per drawing and site requirement.
B2.d.9	Existing Flame viewing system (FVS) on left & right side wall to be relocated at El 51000 (Tentative). Cutting of water wall to accommodate FVS. Welding of spool ww piece. Erection of approach platform for FVS.
4.2.B2.e	Other Work
B2.e.1	Additional Floors to be added at El 10.2 Mtrs, El 40.2 Mtrs, El 44.80 Mtrs, El 51.20 Mtrs & El 55.6 Mtrs as per drawing/guidance of Engr I /C.
B2.e.2	Fabrication of Floors/benches/laders (where ever required as per drawings/site condition) without any extra cost.
B2.e.3	Modification of existing floors without any extra cost.
4.2.B2.f	SUPPLY & APPLICATION OF PAINTS
B2.f.1	The contractor's scope of work includes supply & application of paints of all equipment and structures which are supplied new & of those items which will be re-used as per the Employer's standard color coding scheme which shall be furnished to the Contractor. The painting of various components shall comply with the requirements stipulated in different part of this specification. However, for components where no specific requirement is stipulated, the painting conforming to the requirements stipulated below shall be provided. The quality and finish of paints shall be as per standards of BIS or equivalent. The surfaces which have surface temperature of 95 degree Celsius (with or without insulation) shall be applied with at least two coats of high temperature primer/ paint with total OFT not less than 40 micron.
B2.f.2	Red oxide paints to be applied on all weld joints.
4.2.B2.g	Insultaion & Refractory Work
B.2.g.1	Insulation to be applied in Pr Parts, Water Wall, Ducts as per drawing/Instruction of Engr I/C.
B.2.g.2	Refractory to be applied as per drawing/instruction of Engr I/C.
B.2.g.3	Self tapping screw for insulation to be supplied by vendor.
B.2.g.4	Cutting of cladding sheets as per the profile of the equipment and painting on inner surface two coats of bituminous paint. Black Bituminous Paint will be supplied by Contractor
4.2.B2.h	Commissioning Activities
B.2.h.1	"Contractor shall provide qualified manpower with necessary T&P for testing and commissioning of system for conducting Hydro test, air tightness test, commissioing of SADC system & BOFA system etc. Attending any defects / deficiency observed during the commissioing activity."
4.2.B.3	Post Shutdwon Commissioning activities/fine tuning & Performance Guarantee test
B.3.1	Contractor shall provide qualified manpower with necessary T&P for post shutdown testing, commissioning & fine tuning of the system.Full necessary assistance for conducting performance

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 12 OF 62

	guarantee (PG) test etc as required to complete the system. Attending any defects / deficiency observed during this period for successful completion of PG Test.
4.2.C	SHIFTING OF MATERIAL FROM STORE/YARD TO SITE,ERECTION,TESTING,COMMISSIOING,CABLE & CABLE TRAY LAYING ,TERMINATION/SPLICING ,TAGGING, FERRRULING ,DRESSING OF NEWLY SUPPLIED C&I & ELECTRICAL ITEMS (Refer Annex-III of this TCC for tentative list of New C&I & Electrical Items) and including PG test etc.of the system.
C.1	Control instrumentation for New BOFA power cylinders, erection of I/P converters, pressure switches, flow transmitters, LIE / LIR, hook ups, BOFA air flow pitot tube. Including laying of cables to Junction box. Erection of New Junction Boxes. C&I of all other work required to complete given scope of work.
C.2	Pneumatic actuators with positioners and I/P converters for BOFA dampers, BOFA tilt power cylinders with positioners and shear pin failure indicator and alarm. Air Filter Regulator and pressure switches/ transmitters in BOFA signal airline.
C.3	Flow elements (Aerofoil or as per the standard and proven practice of Contractor) with flow transmitter in BOFA secondary air duct. • Solenoids and pneumatic tubing for auto purging of BOFA flow element
C.4	Instrumentation and control cables, power supply distribution cables, special cables (such as Scanner pig tail cable) along with accessories for interconnection/ integration of C&I instruments/equipment of system with existing unit DDCMI, Instrument hook up material, erection hardware, impulse tubing/ piping,fitting, racks, enclosures, junction boxes etc. for C&I:
C.5	Branch cable trays up to field Junction boxes, Instrument air piping from the existing instrument airline to existing and new equipment/instruments, Instrument air distribution SS tubing, fittings for SADC /BOFA actuators, Corner Nozzle valves, HEA ignitors, Burner Tilt Power cylinders and BOFA Tilt Power cylinders
C.6	Two (02 nos.) of CO analyzers at Economizer outlets of each unit. Tapping points for CO analyzers, suitable for analyser mounting, shall be erected at Economizer outlet ducts
C.7	Microprocessor based electronic positioners with all the pneumatic operated control valves/ dampers being erected and commissioned. For burner-tilt application, Microprocessor based electronic positioners with remote positioner units shall be provided. However, pneumatic positioners along with I/P converters are also a part for SADC BOFA dampers
C.8	All associated Electrical, Control & Instrumentation works
C.9	Erection & Commissioning of CO analysers at ECO Outlet duct. Erection of approach platform & benches for CO analyser. 4 nos CCTV are to be erected and commissioned at bottom ash hopper.
C.10	Erection, installation,cable tray erection, cable laying, cable termination in both ends,cable splicing,ferruling, tagging,cable dressing, applicable testing, commissioning of all newly supplied C&I & Electrical system/items.
C.11	Installation of all pneumatic actuators including pneumatic cylinders, solenoid valves, and pneumatic accessories limit switches etc.
C.12	Laying of instrument air pipes to various valves and instruments form the terminal points onward as required.
C.13	Laying of cables, cable trays, JB's, cable termination with instruments,splicing, ferruling, tagging, testing, commissioning & PG test.
C.14	Branch cable trays up to field Junction boxes for the newly supplied cables.
C.15	Instrumentation and control cables, power supply distribution cables, special cables (such as Scanner pig tail cable) along with accessories for interconnection/ integration of C&I instruments/equipment of system being renovated/upgraded with existing unit DDCMIS
C.16	Instrument air piping from the existing instrument airline to existing and new equipment/instruments
C.17	Installation of Two (02) nos. of CCTV cameras (High Definition (HD) fixed type) outside the furnace (one on left and right side) at about 10.5 M elevation. Installation of Seal Boxes fitted with sight glass in each side of boiler water walls
C.18	Installation of Two (02) nos. of CCTV cameras (High Definition (HD) fixed type) outside the bottom ash hopper at about 8 M elevations.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 13 OF 62

C.19	E&C of Burner Tilt shear pin failure system, Flame scanner pigtail cable, Furnace bottom ash viewing CCTV cameras.
C.20	Instrumentation and control cables, power supply distribution cables, special cables (such as Scanner pig tail cable) along with accessories for interconnection/Integration of C&I instruments/equipment of system being renovated/upgraded with Existing unit DDCMIS.
C.21	Supply and application of paints wherever required.
C.22	Quantity & Size of C&I & Electrical Works/Items may vary to any extent. No extra payment shall be made for quantity/size variation to complete NOx modification work.
4.2.D	MATERIAL HANDLING JOB: RECEIPT, UNLOADING, TRANSPORTATION, STORAGE, WATCH & WARD ETC.OF MATERIALS TILL THE COMMISSIONING OF THE UNIT & RECONCILIATION OF THE MATERIALS.
4.2.D.1	NEW MATERIALS SUPPLIED BY BHEL MANUFACTURING UNIT / BHEL VENDOR
D1.1	Material for combustion modification system shall be supplied by BHEL manufacturing unit / BHEL vendor. All the materials are to be unloaded and stored at BHEL / DVC stores/ open yard by the contractor. Location of unloading will be intimated by BHEL site engineer. Unloading is to be done as per instruction of BHEL site engineer.
D.1.2	Unloading, stacking, reloading the materials/ equipment received, wherever/whenever required, to trucks/ trailers etc. & transportation to stores/ storage yard/ work site at subject project, unloading and stacking at site stores/storage yard/ work site in line with BHEL storage manual and as per the instruction of BHEL engineer.
D.1.3	Material Receipt/unloading/stacking/storage/upkeepment /verification /record keeping / issue / assistance for insurance /reconciliation/ watch & ward. All records are to be kept/entered in computer as well as in registrar.
D1.4	The contractor shall maintain computerised records as well as in Registrar for receipt of materials, issued to BHEL's vendors and return by BHEL's vendors in BHEL standard format/ BHEL Computerised system like (ISCMS/E-store etc). Monthly report shall be produced by contractor and Suitable soft & hard copy be maintained as a back up. Vendor need to keep record of all received items, its location of unloading, issue details etc. After completion of job vendor will have to provide reconciliation of materials.
D.1.5	The contractor shall assist for raising insurance claim in case of damage, short supply, theft or any other cause in consultation with BHEL engineers and assist during survey work by the surveyor of insurance company. For theft of materials, contractor shall raise FIR with local police
D.1.6	Complete manpower, T&P, crane/ hydra & its operator & consumables etc. required for convenient unloading, transportation to store & store to erection site of material is to be provided/ arranged by contractor.
D.1.7	Services for watch & ward of BHEL Material, it may be its own store/BHEL store/ DVC store/open yard. Agency have to arrange suitable watch and ward facility on round the clock basis along with store supervisor.
D.1.8	Preliminary verification of materials at the time of unloading reporting discrepancies like damages and storages, raising insurance, coordination with insurance agency if noticed. The contractor shall raise insurance claim in case of damage, short supply, theft or any other cause in consultation with BHEL engineers and assist during survey work by the surveyor of insurance company. Insurance is under BHEL- scope.
D.1.9	The contractor shall raise MDR & monthly MIR pertaining to material management in Consultation with BHEL engineers.
D.1.10	Contractor is advised to keep ready his T&P, hydra etc. for unloading the material at site/stores and should report to site immediately for unloading of such item when ever asked for. Contractor will be intimated timely to mobilize for such activity.
D.1.11	Stacking and storing of materials at Customer open storage yard or covered stores or semi-closed sheds as per BHEL site engineer instructions. Storage & Preservation of materials received inside the project premises up to erection of same shall be in accordance with BHEL's preservation manual or as per BHEL's instructions. Submission of stacking/storing records. All arrangements like Wooden

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 14 OF 62

	sleepers / concrete blocks / steel frames and tarpaulins, preservatives, paints etc for this purpose wherever deemed necessary shall be made by sub-contractor.
D.1.12	Detailed verification of materials within 07 days with reference to packing list and loading advice slip after unpacking of boxes; repacking after detailed verification; preparation of receipt inspection reports.
D.1.13	Issue of materials for execution of work at site. Identification of Materials at Stores & their transportation from stores to site including Necessary shifting/removal of other materials stacked on the identified material, un packing of the materials, removal of any obstructions & hindrances etc
D.1.14	Maintenance of area where the material will be kept by means of proper lighting, cleaning in and around storage yards and sheds. General cleaning, controlling vegetation growth and upkeep of storage yard, covered and semi-closed /stores sheds.
D.1.15	Supply of material is expected to commence from March' 2021. Approximate weight of material to be unloaded at site is around 265 MT/Unit. Final weight for unloading may be increased / decreased as per actual shipment from BHEL Manufacturing units. Refer annex-II for New Mechanical Item List & Annex-III for C&I/Electrical Item list. Payment will be made on prorata rate basis as per actual quantity. If the consignment is not unloaded in time and BHEL had to pay any detention/ demurrage then the amount of such charges + 05% over head in each case shall be deducted from from contractor's R.A. bill or any other dues.
4.2.D.2	EXISTING OLD MATERAILS
D.2.1	SHIFTING/RE-STACKING of existing old materials kept in covered Stores/semi covered store/open yard to create storage space for new material.
D.2.2	Approx weight of existing/old materials shifting/re stacking inside cover store/semi covered store/material yard is 10 MT/Unit. Payment will be made on prorata rate basis as per actual quantity.
5.0	GENERAL SCOPE OF WORK
5.1	Vendor need to take approval from Boiler Directorate/Jharkhand under Section 392 of IBR. Vendor has to co-ordinate with Boiler Directorate/Jharkhand for approval of Drawings for the subject work. Arrangement for inspections/approval through Boiler Directorate/Jharkahand upto hydro test/completion of work.
5.2	The Sub-contractor has to obtain all statutory clearances and permissions from concerned authorities as required for the work and they must observe and strictly adhere to all labor & industrial laws, and other statutory laws, acts & regulations as applicable for the contract.
5.3	The Sub-contractor has to provide all required skilled & semi-skilled labors & technicians, experienced engineers & supervisors, qualified Electrician, qualified Quality & Safety Engineer/supervisor and other Manpower.
5.4	The Sub-contractor has to provide all required Tools & Plants (T&Ps) in sufficient quantities including Trucks/Tractors/Trailers, Hydra cranes, Winch Machines, Multi Sheave Pulley Blocks, Chain Pulley Blocks, Pulls & Lifts, Slings, Eye Bolts, D-Shackles, Turn Buckles, Hoists, Hydraulic Jacks, Manual Jacks, Torque Wrenches (up to 750 KG – M), Alignment Clamps, Pipe Clamps, Welding Machines. Gas Cutting Sets, Arc Welding Sets, Spanners (up to 90 mm), TIG set,Files, Grinders, Drill Machines, Taps & Dies, Tube Bending Machine, Tongue tester, meggar, Water Washing Hose Pipes and Attachments and all other types of Tools & Plants. Tentative Requirement shall be as per Annexure- V
5.5	The Sub-contractor has to provide all required Measuring & Monitoring Devices (MMDs) in sufficient quantity including Master Level (0.02 mm/m), Spirit Level, Straight Edge, Water Level, Dumpy Level, DPT Kit, Piano Wire, Plumb Line, Measuring TapeScale, Vernier Calipers, Column Alignment Checking Instruments, Tri Square and all other types of Measuring & Monitoring Devices (MMDs). Tentative Requirement shall be as per Annexure-V
5.6	The Sub-contractor has to provide all required Consumables including Welding Electrodes & Filler Wires (BHEL approved only), D.A., Oxygen, Argon, Nitrogen and other Industrial Gases, DPT & MPI Consumables, Blue Paste, Diesel, Petrol, Kerosene and other oil, Rust Remover Compound, Sealing & Jointing Compounds, Cloths, Emery Paper, Coir Rope and all other types of Consumables as per site requirement as per Annexure – VI
5.7	Vendor has to arrange following items like tarpaulin, plastic sheets, wire brushes and all other types of

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 15 OF 62

	other materials & resources required for completion of work
5.8	The Sub-contractor has to provide following items like all lugs of size 2.5 sq mm & below, all ferules etc. asbestos ropes for manhole doors (if required).
5.9	Proper Arrangement of House Keeping, strict compliance of Health Safety & Environment norms of BHEL, Day to Day cleaning of the entire working area and final area cleaning on completion of work including arrangement of water washing equipments and accessories is included in the Scope of Work of the Sub-contractor.
5.10	Electrical power connection at one point only and supply for execution of job shall be on chargeable basis & contractor has to arrange for distribution to various work place at site. Vendor has to arrange power cable, junction box, MCB's ELCB's etc as required power power intake. Supply used for stores and office shall be on chargeable basis. For this the sub-contractor shall apply to DVC for electrical connection to concerned distribution agency of DVC after completing all formalities. Bills for electricity consumed for office and stores will be settled by the sub-contractor. All necessary arrangements i.e. extension switch boards with MCBs of required capacity for tapping power shall be arranged by sub-contractor.
5.11	Space for Office and Stores shall be provided to the sub-contractor and the Sub-contractor has to build and furnish office & stores at their own cost. The sub-contractor shall arrange for sufficient nos. of flood lights and other arrangement for ensuring round the clock work. Necessary co ordination with stores and other agencies shall be in the scope of the sub-contractor.
5.12	The sub-contractor shall submit daily progress report and attend review meeting with BHEL on day to day basis.
5.13	The sub-contractor shall arrange accommodation, transport, medical, sanitary, safety and other arrangements for all Manpower at their own cost.
5.14	The sub-contractor must maintain proper system of documentation for Quality, Safety, HSE and other aspects so as to fulfill the requirement of ISO, OHSAS, 5S, SA 8000 and other National/International Standards
5.15	All necessary arrangements are to be made by the sub-contractor for transportation of materials including providing of all required Manpower and Cranes, Hydras, Trucks, Trailers, Tractors and other means of transportation
5.16	All Necessary arrangements are to be made for handling, lifting, shifting, erection, placement, assembly, matching, alignment, supporting, welding, cutting, grinding, drilling, DPT, RT, SR and other associated works etc. for the materials to be erected/dismantled. Including providing of all required Manpower, T&Ps, MMDs, Consumables and Other Materials.
5.17	The sub-contractor shall carry out Dismantling, Removal, shifting of any obstructing structures, pipe lines, cables & cable trays, facilities etc. as required including restoration of the same on completion of work. Any re routing of pipelines, cables and cable trays, equipments facilities etc, if required, shall be carried out by subcontractor free of cost and shall be done in the pre-shutdown period up to the extent possible.
5.18	All Necessary Preparation, Development, Barricading and Marking of the Area has to be made by the sub-contractor for Storage, Fabrication, and Pre Assembly & Erection of the Materials.
5.19	The sub-contractor has to carry out Erection of Scaffolding, Platforms, Approaches as required including arrangement of scaffolding materials for otherl areas. Dismantling of the same on completion of work.
5.20	Identification & Receipt of Materials at Stores & their transportation from stores to site including Necessary shifting/removal of other materials stacked on the identified material, un packing of the materials, removal of any obstructions & hindrances etc.
5.21	Transportation of dismantled components, scraps & debris generated and other materials removed to disposal yard/stores on day to day basis. After completion of work, cleaning & shifting of all type of scrap from site to scrap yard and Transportation balance/surplus materials to store.
5.22	RT, SR, DPT of Pr Parts weld joints and other components as per BHEL norms.
5.23	Fabrication of duct, support frame, Platform members etc to be carried out from standard size plates,

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 16 OF 62

	structures without any extra work wherever required..
5.24	Laying of Insulation, Refractory & Cladding as per BHEL norms including curing of the refractory.
5.25	Laying of instrument air, service air for different equipments wherever required in Boiler.
5.26	All temp, pressure, flow sensing devices, pg test points, and tapping points (Up to root valve) for air /gas /water required for the Boiler shall be covered under the scope of work.
5.27	The erection/fabrication of platforms wherever required for approaching to the different types of instruments, pneumatic actuator and electrical actuator etc shall be covered under the scope of work.
5.28	Supply & application of Painting of the structures, piping, equipments & other components as per BHEL norms including supply of paints The codes and standards applicable, preparation of surfaces, primer paint, finish paint, shall be as per enclosed Annexure – VII.
5.29	Testing and commissioning of all equipments & systems including installation of testing equipments, tapping points etc. and rectification of defects observed including replacement/re erection/rectification of components as required.
5.30	Trial operations of all equipments & systems and rectification of defects observed including replacement/re erection/rectification of components as required.
5.31	Insulation of expansion joints, dampers, etc shall be carried out after NDT / gas tightness test is completed.
5.32	Necessary assistance for other Tests of Equipments & Systems and other pre commissioning & commissioning activities and rectification of defects observed including replacement/re erection/rectification of components as required.
5.33	Necessary assistance for Performance Guarantee Test including installation of testing equipments, tapping points etc. and necessary adjustments/rectification as required.
5.34	Necessary assistance for Hydro test, commissioning of the unit upto full load and rectification of defects observed including replacement/re erection/rectification of components as required.
5.35	All works are to be carried out as per drawings and as per instruction of BHEL Engineer and all necessary adjustments, setting, alignment, testing and other associated works shall be carried out as per drawings and as per instruction of BHEL Engineer
5.36	For completion of work, the contractor will have to work in round the clock basis. He will not be eligible for any extra charges on account of this.
5.37	All the contractor's employees shall carry identification cards/gate passes while working at site.
5.38	Vendor has to arrange following items like tarpaulin, plastic sheets, wire brushes and all other types of other materials & resources required for completion of work
6.0	GENERAL TECHNICAL REQUIREMENTS (CODES AND STANDARDS)
6.1	Unless otherwise specified, the plant/ equipment shall comply with appropriate Indian Standard or an agreed internationally accepted Standard Specification as mentioned elsewhere in tender, each incorporating the latest revisions at the time of tendering. Where no internationally accepted standard is applicable, the bidder shall give all particulars and details as necessary; to enable BHEL to identify all of the plant/ equipment in the same detail as would be possible had there been a standard specification.
6.2	Where the bidder propose alternative codes or standards, they shall include in their offer one copy (in English) of each standard specification to which materials/ process offered shall comply. In such case, the adopted alternative standard shall be equivalent or superior to the standards mentioned in the specification.
6.3	In the event of any conflict between the codes & standards referred above, and requirements of the tender, requirements which are more stringent shall govern.
6.4	Tools used during erection & commissioning/ completion shall not be accepted except with the specific approval of the engineer.
6.5	Wherever specified or required the plant/ equipment shall conform to various statutory regulations such as Indian Boiler Regulation, Indian Electricity Rules, Indian Explosive Act, Factories Act, etc, wherever required, obtaining approval for plant/ equipment supplied under the specification from statutory authorities shall be the responsibility of the successful bidder.
7.0	GENERAL SERVICES TO BE RENDERED BY THE BIDDER

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 17 OF 62

7.1	Services for construction, fabrication, equipment erection, testing as well as trial run & commissioning of various equipment and accessories under the contract shall include but not be limited to the following.
7.2	Issuing materials from store/ storage yard from time to time for erection as per the construction program. The successful bidder shall be the custodian of all the materials issued till the plant/ equipment is officially taken over by the owner/ BHEL after complete erection any successful trial run & commissioning.
7.3	Transport of material to their respective places of erection and erection of complete plant & equipment as supplied under this tender.
7.4	Trial run, commissioning of individual equipment/ sub-systems to the satisfaction of BHEL/ customer.
7.5	Deployment of all skilled & unskilled manpower required for erection, supervision of erection, watch & ward, commissioning and other services to the rendered under this tender.
7.6	Deployment of all erection tools & tackle, construction machinery, transportation vehicles, all other implements in adequate number & size, appropriate for erection work to be handled under scope of this tender, unless otherwise specified.
7.7	Supply of all consumables, eg welding electrodes, cleaning agents, diesel oil, lubricant, etc as well as materials required for temporary supports, etc as necessary for such erection work, unless specified otherwise.
7.8	Providing support services for successful bidder's erection staff, eg, construction of site offices, temporary stores, residential accommodation and transport to work site for erection personnel, watch & ward for security & safety of materials under the successful bidder's custody, etc, as required.
7.9	Maintaining proper documentation of all site activities undertaken by successful bidder as per the proforma mutually agreed with BHEL, submitting monthly progress reports as also any such document as & when desired by BHEL/ owner, taking approval of all statutory authorities, ie Boiler Inspector, Factory Inspector, Inspector of Explosives etc, as applicable, for respective portions of work under the jurisdiction of such statutes of laws.
7.10	All the materials issued to the bidder by BHEL shall be reconciled by the bidder and the unused materials have to be returned back to BHEL stores/ yard or any other place as specified by BHEL.
7.11	After completion of commissioning activity of equipment/ systems, the successful bidder shall prepare test reports which shall include all relevant information related to various commissioning checks, tests carried out, any deviations/ commissioning noticed wrt intended design requirements, sequence of various commissioning activities as actually adopted vis-à-vis as recommended in the procedures, programme schedule achieved and any other such information as required .These test reports shall be submitted in requisite number of copies to BHEL/ Alstom/ owner during the commissioning activities.
8.0	GENERAL GUIDELINES FOR FIELD ACTIVITIES
8.1	The successful bidder shall execute the works in a professional manner so as to achieve the target schedule without any sacrifice on quality and maintaining highest standards of safety and cleanliness.
8.2	The successful bidder shall co-operate with owner/ BHEL and other successful bidders working in site and arrange to perform his work in a manner so as to minimise interference with other successful bidder's works. BHEL's engineer shall be notified promptly of any defect in other successful bidders' works that could affect the successful bidder's work. If rescheduling of successful bidder's work is requested by the owner's/ BHEL's engineer in the interest of overall site activities, the same shall be complied with by the successful bidder. In all cases of controversy, the decision of BHEL shall be final and binding on the successful bidder without any commercial implication.
8.3	The engineer shall hold daily meeting with the successful bidder working at site at a time and a place to be designated by the engineer. The successful bidder shall attend such meetings and take notes of discussions during the meeting and the decisions of the engineer and shall strictly adhere to those decisions in performing this work. In addition to the above weekly meeting, engineer may call for other meetings either with individual successful bidders or with selected number of successful bidders and in such a case the successful bidder, if called will also attend such meetings.
8.4	Time is the essence of the contract and the successful bidder shall be responsible for performance of his work in accordance with the specified construction schedule. If at any time the successful bidder is falling behind the schedule, he shall take necessary action to make good of such delays by increasing

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 18 OF 62

	his work to comply with the schedule and shall communicate such action in writing to the engineer, satisfying that his action will compensate for the delay. The successful bidder shall not be allowed any extra compensation for such action.
8.5	The engineer shall however not be responsible for provision of additional labour and or materials or supply of any other services to the successful bidder except for the co-ordination work between various successful bidders as set out earlier.
8.6	The works under execution shall be open to inspection & supervision by BHEL/ customer engineer at all times. The successful bidder shall give reasonable notice to BHEL before covering up or otherwise placing beyond the reach of inspection any work, in order that same may be verified, if so desired by owner/ BHEL.
8.7	Every effort shall be made to maintain the highest quality of workmanship by stringent supervision & inspection at every stage of execution. Manufacturer's instruction manual & guidelines on sequence of erection and precautions shall be strictly followed. Should any error or ambiguity be discovered in such documents, the same shall be brought to the notice of BHEL's engineer. Manufacturer's interpretation in such cases shall be binding on successful bidder.
8.8	Successful bidder shall comply with all the rules & regulations of local authorities, all statutory laws including Minimum Wages, Workmen Compensation etc. All registration and statutory inspection fees, if any, in respect of the work executed by the successful bidder shall be to his account.
8.9	All the works such as cleaning, checking, levelling, blue matching, aligning, assembling, temporary erection for alignment, opening, dismantling of certain equipment for checking and cleaning, surface preparation, edge preparation, fabrication of tubes and pipes as per general engineering practice at site, cutting, grinding, straightening, chamfering, filling, chipping, drilling, reaming, scrapping, shaping, fitting-up, bolting/ welding, etc, as may be applicable in such erection and necessary to complete the work satisfactorily, are to be treated as incidental and the same shall be carried out by the successful bidder as part of the work.
8.10	It is the responsibility of successful bidder to do alignment, etc if necessary, repeatedly to satisfy engineer, with all necessary tools & tackles, manpower, etc. The alignment will be complete only when jointly certified so, by the successful bidder's engineer and BHEL. Also, successful bidder should ensure that the alignment is not disturbed afterwards.E
8.11	Equipment & material, in case wrongly installed, shall be removed & reinstalled to comply with the design requirement at the successful bidder expense, to the satisfaction of BHEL/ owner.
8.12	After identification of erection materials by BHEL at BHEL's store/ storage yard, it shall be the responsibility of successful bidder to take delivery of materials from BHEL's store/ storage yard by successful bidder's own manpower and re-stack the leftover materials as per erection sequence at BHEL store at their own cost. The entire activities are to be carried out under supervision of BHEL's engineer.
9.0	DEVIATIONS/CLARIFICATIONS
	The bidder is required to submit with his offer in the relevant schedule/ format without any ambiguity. Any assumptions, presumptions, deviations etc indicated or implied anywhere by the bidder except those indicated in the deviation schedule/ format will not be recognized and will not form a part of consideration/ offer. In the absence of such filled-up schedule/ format it will be understood and agreed that the bidder's offer is based on strict conformance to the specification and no negotiation would be allowed in this regard. BHEL reserve the right not to recognize any/ all deviations submitted after opening of the bid.
10.0	DEWATERING
10.1	Vendor will have to arrange pumps, pipes etc in case dewatering is required.
11.0	QUALITY CONTROL & QUALITY ASSURANCE
	Contractor's engineers & supervisors shall be adequately qualified and also inclined to do a quality job. The quality assurance engineer shall co-ordinate all aspects of quality control, inspection, implementation of quality assurance procedures laid down in Quality Plan and technical specification by BHEL. He shall fill up quality assurance log sheets/ formats and submit to BHEL for joint inspection & acceptance. The contractor shall fill up, maintain & preserve the quality records in computerized media. BHEL's/ customer's authorized representative shall be given free access at all time to such

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 19 OF 62

	quality related records etc for inspection, review etc.
12.0	QUALITY ASSURANCE PROGRAMME
12.1	The contractor shall arrange for suitable quality assurance programme to control all activities pertaining to the scope of work, as necessary. Such programs shall be outlined by the contractor and shall be finally accepted by BHEL. A quality assurance programme of the contractor shall generally cover the following.
12.2	The organisation structure & qualification data of key personnel for management and implementation of the proposed quality assurance program.
12.3	System for site erection control including process controls and fabrication and assembly controls.
12.4	Control of non-conforming items and system for corrective actions.
12.5	Inspection and test procedure for all site related works.
12.6	Control of calibration and testing of measuring and testing equipment.
12.7	System for quality audit.
12.8	System for indication and appraisal of inspection status.
12.9	System for maintenance of records.
12.10	General requirements – quality assurance
12.11	All materials, components and equipment covered under the specification shall be procured, manufactured, erected, commissioned & tested, as applicable, at all stages as per comprehensive quality assurance program. An indicative program for inspection/ test, to be carried out by the successful bidder, for some of the major items is given in the respective volume of tender.
12.12	Field quality plan will detail out the quality practices and procedures etc to be followed by the successful bidder's site quality control organization, during various stages of site activities from receipt of material/ equipment at site.
12.13	BHEL reserve the right to carry out quality audit & quality surveillance of the systems & procedures of successful bidder's quality management. Successful bidder shall provide necessary assistance to enable BHEL to carry out such audit.
12.14	Quality audit/ approval of the results of test & inspection will not prejudice the right of BHEL to reject an equipment service not giving desired performance and shall not in no way limit the liabilities and responsibilities of the successful bidder in earning satisfactory performances of equipment/ service as per specification.
12.15	Repair/rectification procedure to be adopted to make any job acceptable shall be subject to the approval of BHEL.
12.16	All the latest relevant IS codes as per technical specification should be available with the successful bidder at site within 45 days from the date of placement of LOI or otherwise specified by Construction Manager/ Project Manager, BHEL.
13.0	AREA REQUIREMENT
	The contractor shall furnish the estimated area required for the construction of his office etc separately (based on BHEL's customer's design), in their technical bid. The same will be reviewed by BHEL and allotted to the extent available/ considered necessary, depending upon the area availability. Contractor shall also have to arrange the watch and ward of its office within the quoted price.
14.0	PROJECT MANAGEMENT/ CONSTRUCTION MANAGEMENT
	To meet the need of construction management at site, successful bidder shall provide the following services within accepted rates.
14.1	PLANNING & MONITORING
14.1.1	Within 15 days of placement of order/ LOI by BHEL, successful bidder shall interact with BHEL site for kick-off meeting to discuss & firm up item-wise/ activity-wise schedule of erection, testing, commissioning so as to complete the entire job within the stipulated completion period, matching with project schedule.
14.1.2	Based on the discussion of the kick-off meeting or otherwise, a master schedule shall be drawn and successful bidder shall submit the same within 7 days of kick-off meeting, for review & acceptance/

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 20 OF 62

	approval of BHEL. Successful bidder shall interact with BHEL to ensure acceptance/ approval of the master schedule within 7 days of submission.
14.1.3	On the basis of accepted/ approved master schedule, on every month, the successful bidder shall submit to Construction Manager, BHEL schedule-wise plan vs actual status of erection, testing, commissioning, along with action plan to make-up delay, if any.
14.1.4	The project schedule might undergo revision/ modification periodically, for which the successful bidder may have to prepare/ modify schedule periodically in consultation with BHEL, so as to match with revised project milestones.
14.1.5	The successful bidder shall ensure monitoring of these activities at least on fortnight basis or at other frequency as mutually agreed with BHEL.
14.1.6	Successful bidder shall submit daily work program based on above schedule. Deferment of above schedule is not acceptable. Successful bidder will adhere to schedule & augment resources to ensure completion as per schedule.
14.1.7	Progress reviews on entire activities will be held periodically as per direction of BHEL, at site/ Kolkata. These meetings will be used as a forum for discussing all areas where progress needs to be expedited. The successful bidder shall be further responsible for ensuring that suitable steps are taken to meet various targets decided upon such meetings.
14.1.8	Successful bidder shall prepare progress report indicating progress on key activities, management summary for critical activities, list of actions require BHEL's attention. The schedule shall preferably be made in Primavera/ MS Projects, so that the same is compatible with BHEL's project management software.
14.2	INFRASTRUCTURE
14.2.1	The successful bidder shall install 1 no all in one PC (multimedia PC work station Core-i5, 2.1 GHz or above, 500 GB HDD, 4 GB RAM, 100/ 1000 MBPS LAN card) of HP/ Compaq/ Lenevo or equivalent make with window 8 or 7 O/S and required software like MS Office 2010 Professional, AutoCAD 2009 or higher, PageMaker (7.0, etc), ADOBE PDF CREATOR with one no laser jet printer compatible for A3 size printing (ink/ cartridge for which to be supplied as & when required), one no laser jet printer compatible for A4 size printing (ink/ cartridge for which to be supplied as & when required) with power backup at places, 01 no dongle/ broad band connection for internet(every month the dongle should be recharged by vendor for un-interrepted internet service) as per instruction of BHEL for exclusive use of BHEL. These computers/ printers shall remain successful bidder's property and they will be allowed to take out the same after completion of original contract period. The successful bidder shall provide data/ information, etc in prescribed formats for periodical updating of progress reports, material management reports, updating of network pertaining to the successful bidder's scope of work, etc. The successful bidder shall also provide 1 no computer operator and 1 number service staff for miscellaneous service for BHEL's use at site for reconciliation, progress review & day-to-day planning purpose, documentation, etc. These facilities are to be provided within 10 days from date of Intimation of BHEL. Computer operator to be provided for 4 months/Unit (tentatively during pre shutdown, shut down & Post Shutdwon Commng period), including extension, if the reason for extension is attributable to successful bidder. If case successful bidder fail to provide computer/ printer or personnel as per requirement, for a continuous period of fifteen days or more, BHEL shall have the right to deduct as per following rates on prorata basis, from successful bidder's RA bill or any other dues.
14.2.1.1	@ Rs 15,000/- (Fifteen thousand) per month for computer operator or at actual rate +05%, whichever is lower.
14.2.1.2	@ Rs 10,000 (Ten thousand) per month for computer with printer or at actual rate +05%, whichever is lower.
14.2.1.3	@ Rs 12,000/- (Twelve thousand) per month for service staff or at actual rate +05%, whichever is lower.
14.2.2	In case BHEL extends the service of computer with printer, computer operator or service staff beyond the aforesaid mandatory period, the successful bidder shall extend the service to BHEL, for which BHEL will reimburse following rates.
14.2.2.1	@ Rs 11,000/- (Eleven thousand) per month for each computer operator or at actual rate +05%, whichever is lower.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 21 OF 62

14.2.2.2	@ Rs 8,000 (Eight thousand) per month for each computer with printer or at actual rate +05%, whichever is lower.
14.2.2.3	@ Rs 9,000/- (Nine thousand) per month for each service staff or at actual rate +05%, whichever is lower.
14.2.3	The successful bidder's site office must have facilities of communications like Fax, E-mail, and telephone with STD facility within a month from LOI.
14.2.4	Within the quoted price, the bidder has to provide mess facility by arranging new set of utensils (cooking & serving), stoves ,gas cylinders / gas oven , electric heaters , chairs , tables etc. including cooks / helpers for preparation of food for 6 to 7 nos. BHEL persons (tentatively during pre shutdown, shut down & Post Shutdwon Commng period). Bidder has to provide foods for the cook and helper.
14.2.5	Successful bidder has to arrange 6 copies of overhauling reports which will include various protocols with necessary data / MOMs / important correspondences / log sheets etc. and the books shall be spiral bound with thick acetate papers in front and back along with BHEL logo printed suitably on thick art paper at the front
14.3	PROGRESS REPORTING
14.3.1	The bidder shall submit daily, weekly and monthly progress reports for work force, materials reports, consumables (gases/electrodes) report and other reports as per pro-forma considered necessary by BHEL. In case of any failure on successful bidder's part to comply with this, BHEL may at its discretion, consider to withhold part payment against their RA bills.
14.3.2	The progress report shall indicate the progress achieved against planned with reasons indicating delays, if any, and shall give the remedial actions which the successful bidder intends to take to make good the slippage or lost time, so that further works again proceed as per the original program and the slippages do not accumulate and effect the overall program.
14.3.3	The daily work force reports shall clearly indicate the work force deployed, category-wise specifying also the activities in which they are engaged.
14.3.4	Weekly progress review meetings will be held at site during which actual progress during the week vis-à-vis scheduled program shall be discussed or actions to be taken for achieving targets. For discussions, the successful bidder shall present program of subsequent week. The successful bidder shall constantly update/ revise his work program to meet the overall requirement.
14.3.5	Periodic progress reviews on the entire activities of execution in respect of supply and works in scope of successful bidder will be held once in a month at site/ Kolkata. These meetings will be attended by reasonably higher officials of the successful bidder and will be used as a forum for discussing all areas where progress needs to be speeded up. The successful bidder shall be further responsible for ensuring that suitable steps are taken to meet various targets decided upon such meetings.
14.3.6	During construction successful bidder shall take adequate digital photograph/ slides (indicating date) each month (not less than nine per week) of the works during progress and submit the soft/hard copy to BHEL office.
14.3.7	Successful bidder has to provide for electronic/ computerized storing and re-production/ printing/ plotting of various data, log sheets, protocols, measurements etc. These may be stored in CD (as per requirement) and handed over to BHEL as per requirement.
14.4	SITE ORGANIZATION
14.4.1	Successful bidder shall maintain a site organization of adequate strength in respect of manpower, construction machinery and other implements at all time for smooth execution of the contract headed by a competent Site In-charge (SIC) for site operations with sufficient level of authority to take site decisions. The successful bidder will submit organization chart (showing the name of SIC) with individual bio-data indicating various levels of experts to be posted for supervision in the fields of supervision & execution, quality, material management, planning, safety, etc. The organization shall be reinforced from time to time, as required to make up slippage (if any) from schedule without any commercial implication to BHEL. The organization chart is to be submitted within 10 days from date of LOI.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 22 OF 62

14.4.2	Following (minimum) engineering manpower with power plant construction background to be deployed at site by the successful bidder for their day to day supervision, etc, within specified days from start of work or otherwise decided jointly with Construction Manager, BHEL. Regarding qualification & experience of each of following categories of manpower, successful bidder shall take prior approval of Construction Manager, BHEL, whose decision shall be final & binding regarding acceptance of any person. Details refer to annexure-IX.	
	Area	Quantity, deployment schedule Unit Wise
14.4.2.1	Site Incharge	1 no, (To be deputed from the date of site mobilization.)
14.4.2.2	Qualified safety officer (Graduate + Diploma in Industrial Safety).	1 nos. (Minimum)
14.4.2.3	Site engineer/Supervisor (Mechanical)	3 nos. (Minimum)
14.4.2.4	Experts of boiler area(pr parts & Burner) to be deployed by the contractor for complete duration of contract till the completion of e&c of combustion modification system	1 No for 35 days in each unit. (Expert to be deputed as per intimation of BHEL)
14.4.2.5	Site engineer/Supervisor (Electrical/C&I)	1 no.(Minimum)
14.4.2.6	Quality engineer /Supervisor	1 no. (Minimum)
14.4.2.7	Material Management Supervisor	1 no.
14.4.3	Engineer/ supervisor for other functions like store & purchase, material management, planning, FIN, administration etc are to be provided as per site requirement and not referred above.	
14.4.4	In the event of failure of the successful bidder to provide necessary manpower indicated above as per requirement, BHEL reserve the right to deduct Rs 50,000 per man-month for engineer/safety officer and Rs30,000 per man-month for the supervisor/ quality officer/electrician from the date of start of work as indicated as above from RA bills. Further induction of manpower regarding site supervisor & site engineer will be decided at site as per requirement. Further induction of manpower regarding site supervisor & site engineer will be decided at site as per requirement.	
14.4.6	In the event of failure of the successful bidder to provide necessary manpower indicated above as per requirement for a continuous period of 3 days or more, BHEL reserve the right to recover at the following rates.In the event of non-deputation of engineer/ supervisor by successful bidder, BHEL reserve the right to deduct Rs 50000 for Engr/Safety Officer & Rs 30,000 per man-month for supervisor/electrician, from the date of deputation as indicated as above from RA bills.	
14.4.7	In the event of failure of the successful bidder to depute 1 no Expert for Boiler Pr Parts & Burner area for period of 35 days in each unit duly vetted by BHEL Site Engineer In charge,an amount of Rs 7000/- per man day will be deducted from RA bills.	
14.4.8	BHEL reserve the right to reject or approve the list of personnel proposed by successful bidder. The persons whose bio-data have been approved by BHEL will have to be posted at site and deviation in this regard will not be permitted unless specific & reasonable justification is made.	
14.4.9	In addition to above, a well experienced qualified engineer to be designated, as 'Project Coordinator', shall be deployed by successful bidder. Such engineer shall have adequate exposure on the job and shall remain fully involved in all planning activities, guidance, etc. to successful bidder's own team during complete execution period of contract.	
14.4.10	Successful bidder should also submit to BHEL for approval a list of T&Ps along with their fitness certificates. The tools & tackles shall not be removed from site without written permission of BHEL.	
14.4.11	Successful bidder should also submit network programs for the erection of various items. These networks shall show owner/ BHEL hold points, which have to be cleared by BHEL/ customer, or their authorized representatives before further erection can take place. These programs for the erection would clearly identify responsibilities of successful bidder & BHEL/ customer. It is the responsibility of successful bidder to get the Networks approved by BHEL within four weeks of the date of finalization of award of work/ placement of LOI.	
14.5	CONSTRUCTION MANAGEMENT	

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 23 OF 62

14.5.1	Based on approved program, successful bidder shall submit program of construction/ erection/ commissioning for implementation. These programs would be amplified showing start of erection & subsequent activities and shall form the basis for site execution & detail monitoring. Daily rolling program with first month's program being tentative based on the site condition would be prepared based on these programs. The successful bidder shall also be involved along with owner/ BHEL to tie up detailed resources mobilization plan over the period of the contract matching with the performance targets.
14.5.2	The program would be jointly finalized by the site in-charge of successful bidder with BHEL/ customer's project coordinator as well as site-planning representative. Erection program will also identify sequential events matching financial turnover.
14.5.3	Successful bidder is liable to furnish all documentary evidences towards payment of Works Contract Tax as and when required by BHEL.
14.6	PROGRESS REPORTING
14.6.1	The bidder shall submit daily, weekly and monthly progress reports for work force, materials reports, consumables (gases/ electrodes) report and other reports as per pro-forma considered necessary by the BHEL. In case of any failure on contractor's part to comply with this, BHEL may at its discretion, consider to withhold part payment against their RA bills.
14.6.2	The progress report shall be in line with project L2 schedule and indicate the items to be erected and actual erected as per BHEL agreed format. A sample format is attached for your reference, however, it may be finalised at site.
14.6.3	The daily work force reports shall clearly indicate the work force deployed, category-wise specifying also the activities in which they are engaged.
14.6.4	Weekly progress review meetings will be held at site during which actual progress during the week vis-à-vis scheduled program shall be discussed or actions to be taken for achieving targets. For discussions, the contractor shall present program of subsequent week. The contractor shall constantly update/revise his work program to meet the overall requirement.
14.6.5	Periodic progress reviews on the entire activities of execution in respect of supply and works in scope of bidder will be held once in a month at Kolkata/site. These meetings will be attended by reasonably higher officials of the contractor and will be used as a forum for discussing all areas where progress needs to be speeded up. The contractor shall be further responsible for ensuring that suitable steps are taken to meet various targets decided upon such meetings.
15.0	LIQUIDATED DAMAGE
15.1	If the successful bidder fails to achieve successful Completion of Facilities within schedule period, for reasons attributable to them, BHEL shall have the right to recover as liquidated damages (LD), One half of the one percent (1/2%) of the contract value of each unit per week of delay in successfully achieving the "completion of facilities" of that unit under the package as per the scope of work & work schedule defined in the contract, or part thereof of delay.
15.2	If the successful bidder fail to complete the stipulated work within shutdown period, for reasons attributable to them, BHEL shall have the right to recover as liquidated damages (LD) a sum INR 94,820/- for each day of extension in Shut Down for each unit.
15.3	The total liquidated damages (LD) for delay in completion of facilities and extension in shutdown period combined together will be subject to a maximum of five percent (5%) of the total Contract Price(including taxes, duties, etc.). Contract price for this purpose, shall be the final executed value exclusive of ORC, extra work executed, supplementary/ additional items and PVC.
15.4	The delay period, if any, attributable to the contractor, in the case of calculation of LD for extension of Unit Shutdownperiod as per sl no.15.2 above, shall not be considered simultaneously for calculation of LD against "completion of facilities" under sl no 15.1 above.
15.5	BHEL shall deduct aforesaid amounts from any money due or which may become due to the successful bidder and/ or recover from the bank guarantees/ security deposit of the successful bidder. To be entitled to impose such compensation/ penalty/ recovery, BHEL will not be required to prove that they have incurred such amount as actual damage.
15.6	BHEL reserve the right to complete the job through other resource at the risk & cost of successful bidder as per tender provision, with/without cancelling the order/ contract.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 24 OF 62

15.7	BHEL reserve the right to cancel the order/ contract or a portion thereof for the work not so completed at the risk & cost of the successful bidder and the successful bidder shall be liable to BHEL for any excess costs thereof.
15.8	The successful bidder shall continue with performance of the order/ contract under all circumstances, to the extent not cancelled.
15.9	Where action is taken as per above, the successful bidder shall be liable for any loss, which BHEL may sustain on that account. The successful bidder shall not be entitled to any gain on such action and the manner & the method of such purchase shall be at the discretion of BHEL. It shall not be obligatory on the part of BHEL to serve a notice of such completion, through other resource, on successful bidder.
15.10	In case of LD recovery, the applicable GST shall also be recovered from vendor. Other provision shall be as per the GCC.
16.0	HEALTH, SAFETY & ENVIRONMENT
16.1	As per BHEL HSE Plan doc no. HSEP:14-ER,Rev.01 dtd. 08/05/20, HSE OCP:61, Rev 01, dtd. 01/06/20 & HSE OCP:61A, dtd.27/04/20.
17.0	SPECIFIC REQUIREMENTS FOR ISO 9002
17.1	Bidders shall ensure that all their staff/ employees are exposed to periodical training programmes conducted by qualified agencies/ personnel on ISO-9002 Standards.
17.2	Bidder shall ensure that the quality is maintained in all the works connected with this contract at all stages of the requirement of BHEL.
17.3	Bidder shall ensure that all Inspection, measuring and testing equipment that are used, whether owned by bidders or used on loan, are calibrated by the authorized agencies and valid calibration certificate will be available with them for verification by BHEL. A list of such instruments possessed by bidder at site with its calibration status is to be submitted to BHEL engineer for control.
17.4	Bidder shall ensure that fitness certificate of the tools & plants, that are in use, whether owned by bidder or issued on loan, are tested by authorised agency & valid fitness certificate are available for verification by BHEL.
17.5	Bidders shall arrange for the inspection of the works at various stages as required by BHEL. Bidders shall take immediate corrective action for the non-conformances if any, observed and pointed out by BHEL.
18.0	LAND
18.1	Land will be provided free of cost by BHEL to the extent available/ considered necessary by BHEL to the successful bidder for their office, store, within plant premises. Availability of land within plant boundary is very limited and successful bidder have to plan & use existing land considering use of land by other civil/ mechanical/ electrical successful bidders and storage of plant machineries & materials. The existing land shall be shared by all agencies.
18.2	The successful bidder shall arrange at his own cost cleaning and grading of area allotted, construction of their temporary office, stores, godown, fabrication yards etc. and also the watch & ward, etc.
18.3	On completion of work, all the temporary buildings, structures, pipelines, cables, etc. shall be dismantled & leveled and debris shall be removed as per instruction of BHEL by the successful bidder at their cost. In the event of failure to do so, the same will be removed and expenditure thereof will be recovered from successful bidder. Decision of BHEL in this regard shall be final & binding. However, the scope of dismantling & leveling the area is limited only to the successful bidder's site office, yard and other spaces occupied by successful bidder.
18.4	The bidder, however, may make a note that only limited space is available at site and it shall be amicably used by all the vendors available at site.
19.0	WATER
19.1	BHEL will provide single point supply for construction water inside the project premises for office free of cost.
19.2	Further necessary network for construction water system shall be done by the bidder at his own cost.
19.3	Contractor should arrange for water for labour colony of their own.
19.4	BHEL shall not be responsible for any inconvenience or delay caused due to any interruption of water supply and the contractor shall claim no compensation for delay in work for such interruption.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 25 OF 62

	Contractor may make standby arrangement for water at their own cost.
19.5	Contractor will have to arrange for storage of water to meet the day-to-day requirement.
19.6	The availability of water (construction) may be limited. Contractor shall ensure that no water is wasted. In this regard the contractor shall take all necessary measure towards preservation of water.
19.7	Contractor to arrange drinking water at its own cost.
20.0	ELECTRICITY
20.1	To meet the construction power requirement of the Combustion Modification package, the Employer shall provide Two Number 415V feeders in LT switchgears. The Contractor shall extend supply from these Construction power feeders to meet the construction power requirements at the various locations included in the Contractor's scope through suitably rated Isolation Transformers along with LT distribution boards as per requirement. LT Packaged Sub-stations with Isolation transformers may also be used for this purpose. Suitable metering arrangement along with associated Instrument transformers and Metering Cubicles meeting the DISCOM requirements shall be provided by the Contractor at each Construction power feeder, for the measurement of actual energy consumed by the Contractor. The charges only for the actual energy consumed by the Contractor shall be recovered by the Employer based on prevalent rate of DISCOM. All necessary statutory requirements for charging construction power of Contractor's network shall be in the Contractor's scope. Construction power supply network is a temporary arrangement which shall be used during the project construction phase. To meet this requirement, the equipments may be arranged by Contractor either by shifting their existing equipments at other installation or by fresh procurement, which may be taken back after commissioning of the project.
20.2	The bidder shall have to provide earth leakage circuit breaker at each point wherever human operated electrical drives/ T&Ps are deployed.
20.3	The power supply will be from the available grid. BHEL shall not be responsible for any inconvenience or delay caused due to any interruption of power supply/ variation in voltage level and no compensation for delay in work can be claimed by the contractor due to such non-supply on the grounds of idle labour, machinery or any other grounds.
20.4	Bidder will have to arrange sufficient illumination at their own work areas.
20.5	The contractor should ensure that the work in critical areas is not held up in the event of power breakdown. In the event of breakdown in the electric supply, if the progress of work is hampered, it will be the responsibility of the contractor to step up the progress of work after restoration of electric supply so that overall progress of work is not affected.
20.6	The contractor shall have to make arrangement at their own cost for illumination that will be required in the working area for execution of the work & safety of workmen.
20.7	Contractor shall make arrangement of electricity of their own for labour colony. If the same is provided by customer, it will be chargeable.
21.0	CONSTRUCTION OF TEMPORARY OFFICE, BIDDER'S OWN STORES ETC
	The contractor shall arrange at their own cost -cleaning of area allotted, construction of his temporary office, his own stores, etc and also the watch & ward of all the above. Materials required for the same shall be arranged by contractor at their own cost.
22.0	CONSUMABLE
22.1	All consumables, like gas, electrodes, chemicals, lubricants etc required for the scope of work, shall be arranged by the contractor at his cost unless otherwise specifically mentioned in the contract.
22.2	All consumables to be used for the job shall have to be approved by BHEL/ customer prior to use.
22.3	In the event of failure of contractor to bring necessary and sufficient consumables, BHEL may arrange for the same at the risk & cost of the contractor. The entire cost towards this along-with overhead shall be paid by the contractor or deducted from the contractor's bills.
23.0	TEST CERTIFICATE FOR T&P
	All T&P, lifting tackles and pulling devices to be deployed by the contractor must bear valid/ latest test certificates for their suitability, and the documents shall be preserved at site & copy to be submitted to BHEL.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 26 OF 62

24.0	MMD The contractor shall ensure deployment of reliable & calibrated instrument, measuring and test equipment (MMD). The MMD shall have test calibration certificate from authorized/ Govt approved agencies. The contractor shall also keep provision of alternate engagement for such MMD so that the work does not suffer when a particular MMD is sent for calibration. Re-testing/ re-calibration shall also be arranged by the contractor at their own cost at regular interval during the period of use as advised by BHEL. Refer Annex-V of TCC for Tentative list of MMD..
25.0	ISSUE OF T&P BY BHEL
25.1	NIL
26.0	TOOLS & PLANTS (TO BE PROVIDED BY CONTRACTOR)
26.1	Tentative list of tools & plants to be deployed by bidder is furnished in the tender. It may be noted that the list is not exhaustive and is only for general guidance. The contractor is required to provide all necessary T&P measuring (calibrated) instruments & handling equipments for timely completion of total work as per contract. In case of project requirement, some activities may have to pre-pone. In such cases the contractor may have to deploy additional T&P. Quoted rate shall be inclusive of such requirements. Refer Annex-V of TCC for tentative list of T&P.
26.2	In the event of any failure of the part of contractor, BHEL may at his discretion also terminate the contract on this ground and take out any or whole amount of the contract from the scope of contractor. In the event of failure of contractor to deploy necessary and sufficient T&P/ MMDs, BHEL will be at liberty to arrange the same at the risk & cost of contractor including transportation cost of same from any of BHEL site/ other agency & charges as applicable shall be deducted from contractor's RA bill. Decision of BHEL in this regard will be final & binding on contractor.
26.3	T&P shown in the list of tender are minimum requirement. Further requirement will be reviewed time to time at site and vendors will provide additional T&P/ equipments to ensure completion of entire work within schedule time without any financial implication to BHEL. Contractor will give advance intimation & certification regarding capacity etc prior to dispatch of heavy equipment.
26.4	For balance T&P as per above list and any other Item required for carrying out the job, no separate payment shall be made and deployment of same will be within quoted rate.
26.5	In case of non-deployment within the period indicated, BHEL reserves the right to arrange the same at the vendor's risk & cost or suitable recoveries will be made from RA bills at site.
26.6	All T&P and all MMDs, which are required for successful and timely execution of the work covered within the scope of this tender, shall be arranged and provided by the contractor at his own cost in working condition.
26.7	In the event of non mobilisation of any T&P by the successful bidder and as a result progress of work is suffered, BHEL reserve the right to deduct suitable amount from the dues of contractor. BHEL's decision in this regard shall be final & binding on contractor.
26.8	It is not obligatory on the part of BHEL to provide any tools and tackles or other materials other than those specifically agreed to do so by BHEL. However, depending upon the availability, BHE's handling equipment and other plants may be made available to the contractor free of cost, subject to the conditions laid down by BHEL from time to time. Unless paid in advance, such hire charges, if applicable shall be recovered from contractor's bill /security deposit or any other payment in one installment.
27.0	FACILITIES TO BE PROVIDED BY THE SUCCESSFUL BIDDER
27.1	All tools and tackles, machinery, equipment, instruments required for the work have to be arranged by the successful bidder including its transportation before and after work and including storage, insurance etc.
27.2	The successful bidder shall provide all required tools and plants, inspection, measuring and test equipment and handling & transportation equipment for the scope of work covered under these specifications. Some of the major T&Ps to be necessarily provided by the successful bidder is listed in relevant appendix of this tender. BHEL will provide the services of their T&Ps listed vide appendix-II, free of charge, on sharing basis.
27.3	All tools and tackles to be deployed by the successful bidder for the work shall have the prior approval of BHEL engineer with regard to brand, quality and specification.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 27 OF 62

27.4	Successful bidder shall provide all the necessary scaffolding materials, temporary structures, as may be required and necessary safety devices etc.
27.5	Successful bidder's responsibilities with regard to operator, fuel, lubricants and daily upkeep of T & Ps provided by BHEL is further detailed in relevant section.
27.6	Timely deployment of adequate quantity of T&P is the responsibility of the successful bidder. The successful bidder shall be prepared to augment the T & P at short notice to match the planned program and to achieve the milestones.
27.7	Successful bidder shall maintain and operate his tools and plants in such a way that major breakdowns are avoided. In the event of major breakdown, successful bidder shall make alternative arrangements expeditiously so that the progress of work is not hampered.
27.8	Vendor shall maintain one hindrance register & keep records daily basis. Hindrance register shall be kept at BHEL site office.
28.0	RESPONSIBILITIES WITH REGARD TO EMPLOYMENT OF LABOUR, ETC
28.1	Successful bidder shall also comply with the requirements of local authorities/ project authorities calling for police verification of antecedents of the workmen, staff, etc.
28.2	BHEL/ customer may insist for witnessing the regular payment to the labour. They may also like to verify the relevant records for compliance with statutory requirements. Successful bidder shall enable such facilities to BHEL / Customer.
28.3	It is the responsibility of the successful bidder to arrange gate pass for all his employees, T & P etc. for entering the project premises. Necessary coordination with customer officials is the responsibility of the successful bidder. Successful bidder to follow all the procedures laid down by the customer for making gate passes. Where permitted, by customer/ BHEL, to work beyond normal working hours, the successful bidder shall arrange necessary work permits for working beyond normal working hours.
28.4	If at any time during the execution of work, it is noticed that the work is suffering on account of non-availability/shortfall in provision of resources from the successful bidder's side BHEL will make suitable alternate arrangements at the risk and cost of successful bidder. The expenditure incurred with overheads thereby shall be recovered from the successful bidder.
28.5	The successful bidder shall deploy all the skilled/semiskilled/ unskilled labour including highly skilled workmen etc. These workmen should have previous experience on similar job. They shall hold valid certificates wherever necessary. BHEL reserves the right to insist on removal of any employee of the successful bidder at any time if he is found to be unsuitable and the successful bidder shall forthwith remove him. Successful bidder should furnish a tentative deployment plan of his manpower as required in GCC. Also the actual deployment will be so as to satisfy the erection and commissioning targets set by BHEL.
28.6	It is the responsibility of the successful bidder to engage his workmen in shifts and or on overtime basis for achieving the targets set by BHEL. This target may be set to suit BHEL's commitments to its customer or to advance date of completion of events or due to other reasons. The decision of BHEL in regard to set the erection and commissioning targets will be final and binding on the successful bidder.
28.7	Successful bidder shall deploy only qualified and experienced engineers/ supervisors. They shall have professional approach in executing the work.
28.8	The successful bidder's supervisory staff shall execute the work in the most professional manner in the stipulated time. Accuracy of work and aesthetic finish are essential part of this contract. They shall be responsible to ensure that the assembly and workmanship conform to dimensions and tolerances given in the drawings/instructions given by BHEL engineer from time to time.
28.9	The supervisory staff employed by the successful bidder shall ensure proper outturn of work and discipline on the part of the labour put on the job by the successful bidder. Also in general they should see that the works are carried out in a safe and proper manner and in coordination with other labour and staff employed directly by BHEL or other successful bidders of BHEL or BHEL's client.
28.10	If at any time, it is found that the successful bidder is not in a position to deploy the required engineers/supervisors/workmen due to any reason, BHEL shall have the option to make alternate arrangements at the successful bidder's risk and cost.
29.0	RECONCILIATION OF BHEL ISSUED MATERIALS
29.1	Successful bidder shall submit a reconciliation statement of material s issued to them, once in two

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 28 OF 62

	months. The same may be submitted along with RA bill.
29.2	Successful bidder shall properly account for the material issued to them as specified herein to the satisfaction of BHEL certifying that the balance material are available with successful bidder's custody at site.
30.0	INSURANCE
30.1	It is the entire responsibility of successful bidder to insure their workmen against accident & injury while at work, as required by relevant rules and to pay compensation, if any, to their workmen as per workmen's compensation act. The successful bidder shall also insure their staff against accident/ injury.
30.2	The successful bidder shall take insurance cover for all materials, tools & plants, etc, required to be provided & deployed for the job by them.
30.3	The insurance coverage have to be taken prior to start of work and successful bidder shall make the policy available to Construction Manager, BHEL for necessary verification before start of work. However, irrespective of such verification/ acceptance, sole responsibility to maintain adequate insurance cover at all times during the period of contract shall lie with successful bidder. Regarding aforesaid insurance cover, successful bidder shall directly deal with the insurance company for all matters regarding the insurance in their scope.
30.4	BHEL/ customer shall arrange comprehensive insurance policy for total supply & services for main equipment/ system covering transit risks & loss, destruction or damage during handling at site, storage, civil work, erection, testing, commissioning, etc up to trial operation/ completion of unit(s) including theft, sabotage, fire, lightning and other natural calamities.
30.5	Successful bidder shall timely intimate discrepancy during contract operation, to the underwriter. Name of the underwriter and Policy No shall be intimated in due course of time.
30.6	Successful bidder shall be responsible for timely submission of loss/ damage/ theft for the materials under vendors custody to the underwriter, assistance in lodging & settlement of claim for losses/ damages/ theft/ lodging of FIR with police. Any consequential loss arising out of non-compliance of this stipulation will be borne by successful bidder.
30.7	Successful bidder will take necessary precautions/ due care to protect the material at project site, while in their custody from any damage/ loss till the same is handed over to BHEL/ customer at project site. For lodging/ processing of insurance claim, the successful bidder will submit necessary documents. BHEL reserve the right to recover the loss from the successful bidder in case the damage/ loss is due to negligence/ carelessness on the part of the successful bidder. In case of theft of material under successful bidder's custody, erected & commiioned items upto handing over to customer, the same shall be reported to police by the successful bidder immediately and copy of FIR and subsequently police investigation report shall be submitted to BHEL/ customer for taking up with insurance. However this will not relieve the successful bidder of their contractual obligation for the materials in their custody.
30.8	In case the damage/ loss/ theft of materials are attributable to negligence/ failure in discharging the duties and obligations of the successful bidder, the expenses incurred for repair/ replacement of such components in excess of the amount realized from the underwriters, limited to Normal Excess (Deductible Franchise) shall be recovered from the successful bidder.
30.9	In case the claim is summarily rejected by the underwriters due to WILFUL NEGLIGENCE of successful bidder, the entire cost of repair/replacement will be recovered from successful bidder.
30.10	It will be responsibility of successful bidder to replenish the items lost/ damaged in time without hampering the schedule of work and without waiting for settlement of insurance claim. Amount received from the underwriters on settlement of insurance claim shall be passed on to successful bidder as and when available.
30.11	Other conditions of Insurance shall be as per relevant clause of GCC.
31.0	SECURITY DEPOSIT & PERFORMANCE BOND AND FINAL BILL.
31.1	Security deposit shall be applicable as per relevant clause of GCC (Volume-IB).
31.2	Performance bond is not applicable for the tender.
31.3	RELEASE OF SD BG AND FINAL BILL
	In addition to other provisions of tender regarding release of SD and final bill, following provisions shall

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 29 OF 62

	also be governing to this tender.
31.3.1	For SD BG- further extension beyond date of acceptance of final bill will not be enforced if the following is fulfilled.
31.3.1.1	Successful bidder discharges their responsibility in r/o of submission of final bill along with absolute 'No Demand Certificate' and other documents as detailed below to the satisfaction of BHEL
31.3.1.2	Joint protocol of set of documents as submitted as detailed in below is certified by site & successful bidder's representative.
31.3.1.3	There is no negative value of the final bill (after release of SD BG) - site to certify the same before release of SD BG.
31.3.1.4	Successful bidder has returned the property belonging to BHEL - site to certify the same before release of SD BG.
31.3.1.5	Successful bidder has submitted joint protocol against 'Delay analysis', if applicable for delayed execution of job.
31.3.2	List of documents to be submitted & jointly protocolled indicating acceptance of final bill by BHEL.
31.3.2.1	Final bill.
31.3.2.2	Measurement for final bill signed, jointly signed by BHEL & successful bidder's representative.
31.3.2.3	Statement having cumulative joint measurement for the contract, jointly signed by BHEL & successful bidder's representative.
31.3.2.4	Claim by successful bidder for refund of security deposit.
31.3.2.5	Jointly signed material reconciliation statement.
31.3.2.6	Statement of payment received from BHEL – Bill wise (Including RA/ PVC/ ORC/ rate revision/ extra work).
31.3.2.7	No claim certificate by successful bidder.
31.3.2.8	Clearance certificates wherever applicable, viz clearance certificates from customer, various statutory authorities, like Labour Department, PF Authorities, Commercial Department, etc.
31.3.2.9	Notarized Indemnity Bond as per prescribed format.
32.0	COMPLETION PERIOD
32.1	The entire work of Erection, Testing and Commissioning, Material Handling up to handing over shall be completed within a period of 12 months (Twelve months) from the date of start of work as certified by Construction Manager BHEL.
32.2	The successful bidder shall arrange to mobilize within 15 days from the date of written notice/intimation by BHEL.
32.3	Material supply at site is expected from Jan'2021.
32.4	Dismantling, Erection, Re-erection, Modification and Commissioning of combustion modification work Pre shut down period is tentatively 25 Days, Shutdown Period of 35 Days, Testing /Commissioning Period of 60 Days. Tentative Shutdown schedule ref Annexure- VIII. It is expected that shutdown for U#1 & U#2 will be given separately & work shall be carried out during different periods for two units. In such case following may be noted: This may require contractor to mobilize & demobilize the site more than once. (If done, no additional charges for mob de-mob shall be paid). In such case after completion of the work for one unit, contractor shall complete all contractual obligations viz, material reconciliation, HR clearances, Labor clearances, other statutory clearance & submit the final bill etc., w.r.t. the completed unit.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 30 OF 62

32.5	The actual date of contractual start of work will be certified by Construction Manager, BHEL after adequate mobilization of manpower, T&P by successful bidder. This certificate date will be deemed as start of work at site for purpose of the contract time schedule.
32.6	The work under the scope of contract will be deemed to be completed in all respects only when all the components are erected and trial runs, testing and commissioning of all individual equipment including trial operations with full load are conducted and handed over. The decision of BHEL shall be final and binding on the successful bidder.
33.0	CONSTRUCTION SCHEDULE
33.1	Entire work shall be carried out in accordance with the broad schedule of this package as furnished below, within the stipulated completion period. This schedule will undergo review and based on progress vis-à-vis project requirement, successful bidder may have to submit revised schedule for approval of BHEL.
33.2	Total completion schedule for this work in all respect is tentatively 12 Months from start of work. For detail schedule refer Annexure- VIII
33.3	Periodic progress reviews on the entire activities of execution in respect of supply & works in scope of successful bidder will be held once in a month at Kolkata/ site. These meetings will be attended by reasonably higher officials of the successful bidder and will be used as a forum for discussing all areas where progress needs to be speeded up. The successful bidder shall be further responsible for ensuring that suitable steps are taken to meet various targets decided upon such meetings.
34.0	CERTIFICATE TOWARDS COMPLETION
	The work under the scope of the successful bidder shall be deemed to have been completed in all respects only when so certified by BHEL/ owner. The decision of BHEL in this regard shall be final and binding on the successful bidder.
35.0	EXTENSION OF TIME FOR COMPLETION
35.1	If the completion of work as detailed in the scope of work gets delayed beyond the contract/ completion period, the successful bidder shall request for an extension of the contract and BHEL at its discretion may extend the contract.
35.2	Based on the reviews jointly signed, the works balance at the end of original contract period less the backlog attributable to the successful bidder shall be quantified, and the number of months of 'Time extension' required for completion of the same shall be jointly worked out. Within this period of 'Time extension', the successful bidder is bound to complete the portion of backlog attributable to the successful bidder. Any further 'Time extension' or 'Time extensions' at the end of the previous extension shall be worked out similarly.
35.3	However, if any 'Time extension' is granted to successful bidder to facilitate continuation of work & completion of contract, due to backlog attributable to successful bidder alone, then it shall be without prejudice to the rights of BHEL to impose penalty/ LD for the delays attributable to successful bidder, in addition to any other actions BHEL may take at the risk and cost of successful bidder.
35.4	A joint programme shall be drawn for the balance amount of work to be completed during the period of 'Time Extension', along with matching resources to be deployed by the successful bidder as per specified format. Review of the programme and record of shortfall shall be done.
35.5	During the period of 'Time extension', successful bidder shall maintain their resources as per mutually agreed program
35.6	At the end of total work completion as certified by BHEL engineer, and upon analysis of the total delay, the portion of time extensions attributable to (i) Successful bidder, (ii) Force majeure conditions, and (iii) BHEL, shall be worked out and shall be considered to be exhausted in the same order. The total period of time extensions shall be the sum of (i), (ii) and (iii) above and shall be equal to period between the scheduled date of completion and the actual date of completion of contract. LD shall be imposed/ levied for the portion of time extensions attributable to successful bidder and recoverable from the dues payable to the successful bidder.
36.0	MOBILIZATION ADVANCE/ INTEREST BEARING RECOVERABLE ADVANCE
	Not applicable for this tender.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 31 OF 62

37.0	OVER RUN CHARGES
	Not applicable for this tender
38.0	PRICE VARIATION COMPENSATION (PVC)/ ESCALATION
	PVC Applicable as per relevant provision of GCC.
39.0	TAXES & DUTIES, ETC.
39.1	All taxes excluding GST with applicable cess & BOCW Cess (mentioned elsewhere in the Tender) but including, Charges, Royalties, , any State or Central Levy and other Taxes for materials if any obtained for the work and for the execution of the contract shall be borne by the bidder and shall not be payable extra by BHEL.
39.2	Any increase in the above at any stage during execution including extension of the contract, if any, shall have to be borne by the contractor. Quoted/ accepted rates/ price shall be inclusive of all such requirements.
39.3	GST with applicable Cess, legally leviable & payable by the successful bidder as per GST Law, shall be paid extra by BHEL. Hence, Bidder shall not include GST with applicable Cess in their quoted price.
39.4	The successful bidder shall furnish proof of GST registration with GSTN Portal covering the services under this contract. Registration should also bear endorsement for the premises from where the billing shall be done by the successful bidder on BHEL for this project/ work.
39.5	Since GST on output will be paid by BHEL separately as enumerated above, bidder's quoted rates/ price should be after considering the Input Credit under GST law at their end.
39.6	TDS under Income Tax shall be deducted at prevailing rates on gross invoice value from the running bills unless exemption certificate from the appropriate authority/ authorities is furnished.
39.7	TDS under GST shall be deducted at applicable rates on gross invoice value from the running bills.
39.8	Bidder shall note that the GST Tax Invoice complying with GST Invoice Rules (Section 31 of GST Act & Rules referred there under) wherein the 'Bill To' details shall be as per following. BHEL GSTN – 19AAACB4146P1ZC NAME - BHARAT HEAVY ELECTRICALS LIMITED ADDRESS – BHEL SITE OFFICE(DNOx MODIFICATION SYSTEM), RAGHUNATHPUR THERMAL POWER STATION(RTPS),PH-I,U#1&2 (2X600 MW),DVC, DISTRICT-PURULIA, W.B, INDIA.
39.9	Bidder to intimate immediately on the day of removal of Goods(in case of any supply of goods) to BHEL along with all relevant details and a scanned copy of Tax Invoice through following communication mode for enabling BHEL to meet its GST related compliances Portal Address – Shall be intimated later. And Email Address – Shall be intimated later. In case of delay in submission of the abovementioned documents on the date of dispatch, BHEL may incur penalty /interest for not adhering to Invoicing Rules under GST Law. The same will be liable to be recovered from the successful bidder, if such delay is attributable to the bidder.
39.10	In case of raising any Supplementary Tax Invoice (Debit / Credit Note) Bidder shall issue the same containing all the details as referred to in Section 34 read with Section 31 of GST Act & Rules referred there under.
39.11	Bidder shall Comply with the Time limit prescribed under the GST Law and rules thereof for raising of the tax invoice. If any supply of goods is applicable, Bidder shall also ensure prompt delivery of Goods after dispatch.
39.12	Bidder shall note that in case GST credit is delayed/ denied to BHEL due to delayed / non receipt of

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 32 OF 62

	goods and /or tax invoice or expiry of the timeline prescribed in GST Law for availing such ITC, or any other reasons attributable to the bidder, GST amount shall be recoverable from the bidder along with interest levied / leviable on BHEL, as the case may be.	
39.13	Bidder shall upload the Invoices raised on BHEL in GSTR-1 within the prescribed time as given in the GST Act. Bidder shall note that in case of delay in declaring such invoice in your return and GST credit availed by BHEL is denied or reversed subsequently as per GST Law , GST amount paid by BHEL towards such ITC reversal as per GST law shall be recoverable from the bidder along with interest levied / leviable on BHEL.	
39.14	Way Bill: Successful Bidder shall arrange way bill / e-waybill for any transfer of goods for the execution of the contract. The Bidder has to make their own arrangement at their cost for completing the formalities, if required, with Issuing Authorities, for bringing materials, plants & machinery at site for execution of the works under this contract, Road Permit/ Way Bill, if required, shall be arranged by the contractor and BHEL will not supply any Road Permit/ Way Bill for this purpose.	
39.15	Any new taxes & duties, if imposed subsequent to the due date of offer submission as per NIT & TCN, by statutory authority during contract period (including extensions for which delay is not attributable to the bidder), shall be reimbursed by BHEL on production of relevant supporting document to the satisfaction of BHEL. However, bidder shall obtain prior approval from BHEL before depositing any such new taxes and duties. Benefits and/or abolition of all existing taxes must be passed on to BHEL against new taxes, if any, introduced at a later date.	
40.0	TERMS OF PAYMENTS (The quoted / awarded amount shall be released progressively on pro-rata basis as per the following for each unit)	
	STAGES OF PAYMENT	PAYMENT BREAK UP IN %
40.1	PAYMENT BREAK UP FOR SL NO.A OF PRICE SCHEDULE (VOL-III, SCH-2)	
40.1.1	On pro rata basis progressively for Dismantling of Mechanical, Electrical & C&I items of each unit.e.g Pr Parts, Structure, Instruments, Electrical/C&I items and disposal of scraps of each unit, Up keepment/storage of items which will be re-used & Re-Erection/re-use/modification, alignment, welding & commissioning of old dismantled items	41%
40.1.2	On pro rata basis progressively for disposal of Scrap Items & Upkeepment of Items to be re-used	10%
40.1.3	On pro rata basis progressively for Re-Erection/Re-use/Modification of Mechanical, Electrical & C&I items of each unit	41%
40.1.4	Supply & Application of Paints for re-erected/re-used/modified items	3%
40.1.5	On pro rata basis unitwise for System Commissioning & Assistance for PG Test	5%
	SUB TOTAL	100%
40.2	PAYMENT BREAK UP FOR SL NO.B OF PRICE SCHEDULE (VOL-III, SCH-2)	
40.2.1	Pre-Assy & Erection	44%
40.2.2	Alignment & welding,application of insulation	35%
40.2.3	Hydro Test of Pr Parts	4%
40.2.4	Air Leak Test	5%
40.2.4	Supply & Application of Paints	3%
40.2.5	System Commissioning & Assistance for PG Test	5%
40.2.6	House Keeping, Scrap Disposal	1%
40.2.7	Submission of as Built Drawing	1%
40.2.8	Punch Point Liquidation	1%
40.2.9	Material Reconciliation	1%

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 33 OF 62

	SUB TOTAL	100%
40.3	PAYMENT BREAK-UP FOR SL NO.C OF PRICE SCHEDULE (VOL-III, SCH-2)	
40.3.1	On pro-rata basis progressively as & when erection work/ cable laying/cable dressing/Cable tagging/termination/splicing/Instrument fixing/cable tray/ferruling/testing/ house keeping/diposal of scrap is complete as per BHEL drawing & instructions	90%
40.3.2	Successful commissioning of Instruments/system	10%
	SUB TOTAL	100%
40.4	PAYMENT BREAK-UP FOR SL NO.D.1 OF PRICE SCHEDULE (VOL-III, SCH-2)	
40.4.1	Receipt/ taking delivery of material at plant, unloading from truck/ trailer, re-loading/ shifting to site store/ storage yard/ work site, verification, stacking, storage, etc, including providing material management service and arrange suitable watch and ward facility round the clock basis along with store supervisor as per tender & as directed by BHEL engineer, for various item/ material).	40%
40.4.2	Updation of store documents (both hard & soft) of above.	10%
40.4.3	Proper stacking, as per direction of BHEL	20%
40.4.4	Verification, as required, as per direction of BHEL	20%
40.4.5	Material Re-conciliation	10%
	SUB TOTAL	100%
40.5	PAYMENT BREAK-UP FOR SL NO.D.2 OF PRICE SCHEDULE (VOL-III, SCH-2).	
40.5.1	existing/old materials shifting/re stacking inside cover store/semi covered store/material yard	100%
i	Payment shall be made on the basis of progress of work on pro-rata basis as certified by BHEL-Engineer as per above break up	
ii	All payments shall be subject to statutory deduction as per rule.	
iii	Necessary documents as specified in GCC shall be submitted with bill.	
iii	All payment shall be made by Electronic Fund Transfer and necessary Bank Details shall be furnished by the sub-contractor.	
iv	Successful bidder shall submit RA bill once in a month at the end of each month as per billing break-up of the tender. The measurement will be taken by BHEL engineer as per relevant clause of GCC and certify regarding the actual work executed in the measurement book and bills for work.	
v	Progressive payment shall be made by BHEL against successful bidder's RA bill, complete & correct in all respects accompanied by BHEL engineer's certified/ measurement sheet, jointly signed; requisite statutory certificates, certified by BHEL; within 60 days of submission of the bill. The bill shall also accompany monthly progress report as per clause no. 14.6 of this TCC.	
vi	The RA bill, complete in all respects accompanied by BHEL engineer's certificate/ jointly signed measurement sheet will be paid, as indicated elsewhere, subject to its completeness & correctness in all respects. The measurement will be taken by BHEL engineer as per relevant clause of GCC and certify regarding the actual work executed in the measurement book and bills for work. All admissible recoveries/ adjustments etc shall be made from the interim payable amount of each RA bill on completion of item of work. Contractor shall make his own arrangement for making payment of impending labour wages and other dues in the meanwhile.	
vii.a.	Out of above break up for payment, 5% will be retained from each bill which will be released on completion of guarantee period and after confirmation of full GST credit to BHEL However, this 5 %, retained from each RA bill, may be released against submission of a separate bank guarantee as per Performance Bank Guarantee format, to be kept valid till guarantee period, subject to (i) Receipt of certificate that all works are completed in all respects; (ii) Reconciliation of materials/ T&P/ MMD; (iii)	

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 34 OF 62

	Completion of final bill formalities and (iv) Handing over to BHEL/ customer. The submission of bank guarantee towards above is separate and the bank guarantee towards security deposit cannot be utilized for this purpose. The security deposit / Retention amount will be refunded as per GCC.
vii.b.	Out of above break up for payment, 2.5 % of gross bill amount shall be paid in the following manner on certification by BHEL engineer after compliance of each of following activity in each month. In case of non-fulfillment of respective activity by successful bidder in each month, no payment shall be made by BHEL against corresponding activity and no claim of successful bidder, at a later date, whatsoever, in this regard will be entertained by BHEL.
vii.c	0.5 % shall be paid on compliance of house-keeping of successful bidder's working area and store/ office areas.
vii.d	0.5 % shall be paid on compliance of general illumination of successful bidder's working area and stores, office area.
vii.e	0.5 % shall be paid on compliance of applicable OHSAS requirement as per guidelines of BHEL and as specified in the tender.
vii.f	0.75 % shall be paid on compliance of applicable safety requirement as per guidelines of BHEL and as specified in the tender.
vii.g	0.25 % shall be paid on compliance of applicable security requirement as per guidelines of BHEL.
viii.	Each RA bill shall accompany with latest agreed & jointly signed L-3/ construction schedule, as enumerated in this tender.
ix.	All admissible recovery/ adjustment, etc. shall be made from interim payable amount.
x	GST shall be released to the vendor upon compliance of following: -
x.a	Vendor declaring such Invoice in his GSTR-1
x.b	Material Receipt Certificate (MRC) / Engineering Protocol by BHEL
x.c	Confirmation of payment of GST thereon by vendor on GSTN Portal
x.d	Above is subject to receipt of goods / service and tax invoice thereof along with vendor declaring invoice in his return and paying GST within timeline prescribed for availing ITC by BHEL.
x.e	Last percentage payment, will be released after confirmation of full GST Credit to BHEL. Any Interest if levied thereon, for reasons elaborated in tax & duties clause of the tender and attributable to the bidder, will be recovered from the Final Payment / Retention amount.
41.0	CONTRACT PRICE
41.1	The bidder shall quote their rates in compliance with specification and terms & conditions of tender and strictly in accordance with prescribed Price Schedule, Volume-III (Latest Revision).
41.2	The quantities of the various items mentioned in the BOQ cum rate schedules of items of Volume-III are approximate, based on very preliminary information and may vary to any extent or to be deleted altogether. The quoted rates of each item will remain firm throughout the period of execution including extension, for reasons whatsoever, as long as variation in the total value of the work executed under any part of the this contract including extra items, if any, but excluding any price variation, remains within +/- 15 % (plus/minus fifteen percent) of the awarded price as per LOI / WO.
41.3	All other provisions of GCC on quantity variation shall be applicable for this tender.
42.0	GUARANTEE/ WARRANTY PERIOD/DEFECT LIABILITY
42.1	Even though the work will be carried out under supervision of BHEL, the successful bidder will be responsible for the quality of workmanship, quality of materials/ items and design for which the successful bidder is responsible.
42.2	The successful bidder shall guarantee the work executed under the scope of the contract for a period of eighteen (18) months from the date of successful Completion of the Facilities (or any part thereof) or twelve (12) months from the date of Operational Acceptance of the Facilities (or any part thereof), whichever occurs first Unit wise. The date of start of guarantee period is considered as certified by the engineer (i.e. on completion of total work under scope of work and/ or handing over to BHEL/ owner) and shall rectify free of cost all defects due to faulty work done, supply (if applicable) within the guarantee/warranty/defect liability period. In case the successful bidder fails to repair/ replace the defective works within the time specified by the engineer, BHEL may proceed to undertake the repairs/ replace such defective works at successful bidder's risk & cost without prejudice to any other rights

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 35 OF 62

	and recover the same from security deposit/ other dues.
42.3	Other provision shall be as per the GCC.
43.0	DELETED
44.0	REVISION ON ACCEPTED CONTRACT RATE
	Rate revision is not applicable for this tender.
45.0	EXTRA WORKS
	As per GCC
46.0	OTHER TERMS
46.1	All other term & conditions of this specification, not mentioned above shall be governed by the pertinent provisions of GCC, Volume-IB.
47.0	Terminal Points:-
47.1	Instrument and service air:- at one point in Boiler area (4-6 Ksc) • Marshalling panel of DVC DDCMIS. • 230V Single phase AC UPS and 24 DC power supply feeder from DVC ACDB and DCDB in CER. • Marshaling cabinet of DVC DDCMIS in CER for input/output signals

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 36 OF 62

48.0

ANNEXURE-I
[REF. PRICE SCHEDULE, VOL-III, SCH-2, SL. NO.A]

**TENTATIVE WEIGHT OF ITEMS (Mechanical/ C&I/ Electrical) TO BE DISMANTLED & RE-USED/RE
ERECTED/MODIFIED/COMMISSIONED ETC.IS MENTIONED BELOW. HOWEVER ACTUAL QTY OF
ITEMS TO BE DECIDED AS PER SITE CONDITION/ENGINEER I/C.**

The contractor shall carry out Dismantling, Removal, Shifting of any obstructing Pr Parts, structures, buck stay, pipe lines, cables & cable trays, boiler lighting arrangement, wall blower system at BOFA panel elevation, facilities etc. upkeement of the items & shifting from store to site, for Re-Use/Re-Erection/Modification as per drawing/Instruction of Engr I/C.

A. Following Items to Be dismantled, preserved & to be re-used/ re-erected/ modified/ commissioned:-

MECHANICAL ITEMS:

- Insulation cladding, wool, refractory etc as required.
- Structure components like Platform, hand rails, floor gratings, stair cases, ladders etc of Different Elevation as required.
- Existing Wind box assembly, coal burner, Coal nozzle tip, coal piping, hangers etc
- Misc structural items(channel, Angles, Beams etc.)
- Wall blower, soot blower, its piping as required.
- Duct, duct support, expansion below etc as required.
- Buckstay beams and its associated members like leveller guide, scalloped bar, pin etc.
- Water wall panels/tubes/ bends as required.
- Coal Burners/Nozzles.
- Burner Nozzles (air/coal/oil).
- Coal Pipe Bends/elbows as required.
- Removal / dismantling of FIE (Fuel Inlet Elbows = 36 Nos, it may vary, as per drawings) for all four corners at all elevation. Transportation of FIE's to designated location as decided by BHEL/ Customer
- Removal of Oil Guns, Gun Guide Pipes, HEA Ignitor, its fittings & its guide pipes, Scanner & their guide pipes. Proper care shall be given while dismantling as these items shall be reused, Oil Gun Vice assy & Rack, Air Cooled Oil gun Assemblies, oil gun mainmtenance box, oil gun vice assy an rack.
- Burner station skid assemblies.
- Corner station piping, valves & fittings.
- Coal piping, coal pipe couplings, supports etc(as required).
- Buckstays in the wind box and BOFA locations.
- Any other piping, supports, valves and fittings etc.
- Removal of all Coal Nozzles from coal compartment for all four corners. Replacement of Nozzle tips with new tips & inert back the nozzles to burners coal compartments.
- Instrument Air, Service Air Line as required.
- Any other mechanical items not mentioned above but required to be dismantled & re-erected/re-used/modified/Alignment/painting for completion of the sytem, same to be carried out by vendor as per instruction of Engr I/C without any extra cost

C&I & ELECTRICAL ITEMS :

- Approximately, 44 Nos. Flame Scanner Head assemblies, Cooling air piping, Scanner hoses etc. (Quantity may vary, as per erection drawings).
- Furnace flame viewing camera(s)/system.
- ASLD(s) etc.
- SADC(s) and Burner tilt power cylinder(s)/actuator(s).
- Dismantling of Cable trays and cables, which are required to be eatsblid the DE-NOX system duct panels etc.
- Existing Pressure gauge(s) in Corner skid for oil and atomizing medium.
- Wind box to Furnace DP Transmitter(s) and related impulse piping.
- Tapping point(s) for any Instrument in water wall.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 37 OF 62

- Field cables and Junction boxes in Boiler Operating Floor/Firing Floor/ air and flue gas path as required to be established the DE-NOX system.
- Existing SADC I/P converter(s), 1/4" Air Filter Regulator(s) in existing SADC(s) signal airline, Existing SADC signal air Line pressure switch(s).
- Illumination items.
- Existing secondary air flow measurement element(s) and transmitter(s) along with cable(s) & accessories.
- Existing corner oil skid(s), instruments in oil line(s), trip valve(s) and control valve(s) along with all associated cable(s).
- Field JB(s) and related impulse piping.
- All existing cable(s) & Cable tray(s) associated with existing SADC actuator I/P(s), pressure switch(s) and SADC(s)/FSSS panel(s) (including field cable(s) till local JB(s)).
- All existing cables between existing corner oil skid, HEA ignitors, oil gun, LGM box and FSSS panel etc. (including field cables till local JB).
- All existing Power, Control & Instrumentation cables for Soot Blowers.
- Existing instruments in air and flue gas path, associated cabling, field JB's and Impulse piping.
- Erection, installation, cable tray erection, cable laying, cable splicing, cable dressing, cable glanding, cable termination, ferruling, splicing, tagging, applicable testing, commissioning of C&I & Electrical system/items.
- Any other C&I/Electrical items not mentioned above but required to be dismantled & re-erected/re-used/modified for completion of the system, same to be carried out by vendor without any extra cost as per drawing / instruction of Engr I/C.

Note: - The above work includes Erection, Testing & Commissioning, Laying, dressing, tagging, glanding, ferruling, terminating at both end, etc. as applicable including continuity checking & IR Value checking (if required) to be done towards commissioning of C&I & Electrical system/items related to Nox mitigation system. The above item list are tentative only.

B. Work to be done as under:-

- i) Dismantling, Removal, Shifting of any obstructing items (Mechanical, C&I, Electrical) as mentioned above for De-Nox system.
- ii) Upkeepment/preservation of the items for re-use, re-erection, modification, welding, alignment, laying, termination, splicing, commissioning, testing, PG Test as per instruction of Engr I/C/Drawing as reqd.
- iii) Relaying/re-erection of Instrument air, service air, other dismantled pipe lines, lighting system, cable(s), cable tray(s), termination, splicing, jb's etc.
- iv) Disposal of scrap to the scrap yard or as instructed by Engr I/C inside plant premises.
- v) Erection testing commissioning of Instrument air distribution SS tubing, fittings for SADC actuators, Corner Nozzle valves, HEA ignitors, Burner Tilt Power cylinders Power cylinders.
- vi) Dismantling/Modification of existing Wind box assembly, coal burner/nozzle, Coal nozzle tip, coal piping, hangers etc.
- vii) Preservation of Scanners and HEA Ignites and critical equipment which can be reused again shall be cleaned and stored in proper shed and shall be reused/ re erected/restored/commissioning/alignment/testing along with cabling, termination, splicing, testing etc as applicable.
- viii) Restoration/re-erection of all removed structure, floor grills, air lines, hand rails, Coal burner/nozzles, Re-erection of removed insulation and cladding with the help of hooks and retainer plates. Existing access openings/observation doors are to be retained. Restoring JB, cable, cable tray as and where applicable. Dismantling & Removal of scaffolding and other temporary structures & arrangements made for handling after completion of work & Transportation of removed material and other scraps generated during the work to disposal yard/handing over the same to DVC customer. Any other alteration which is done for modification is to be restored in original position without any extra charge. If any modification of floor/ bracing is required to successfully complete this BOFA modification job which is not mention here, same has to be carried out with out any extra cost.
- ix) Existing Floor at 10.20 Mtrs, to be extended suitably by 500 mm for CCTV camera approach.
- x) Existing Floor at 51.2 Mtrs, & other Elevations to be modified to clear BOFA assembly & Ducting.
- xi) Modification of Existing Floors as per drawing/guidance of Engr I/C.
- xii) Existing Buckstay at EI 53.70 Mtrs to be modified at corners.
- xiii) Horizontal Bracings interfering with BOFA system to be modified to clear BOFA & Ducting
- xiv) Duct Stiffeners & Insulation at existing items to be adjusted locally at site for clearance.
- xv) All the existing features which are interfering with the proposed arrangement of BOFA are to be suitably relocated at

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 38 OF 62

site to the extent required.

xvi) Supply & application of paints for the re-erected/re-used/modified items.

xvii) Fabrication of Floors/benches (where ever required)

xviii) Vendor need to take approval from Boiler Directorate/Bengal under Section 392 of IBR. Vendor has to co-ordinate with Boiler Directorate/Bengal for approval of Drawings for the subject work. Arrangement for inspections/approval through Boiler Directorate/West Bengal upto hydro test/completion of work.

xix) 100% RT of Pr Parts Weld Joints

Tentative quantity of work/Unit:

- Approx weight to be dismantled will be 60 MT/Unit.
- Approx weight to be re-erected/re-used will be 40 MT/Unit.

Note: Qunatity mentioned above may vary to any extent, no extra paymnet shall be made for quantity variation to complete NOx modification job.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 39 OF 62

49.0

ANNEXURE-II

[REF. PRICE SCHEDULE, VOL-III, SCH-2, SL. NO.B]

TENTATIVE LIST OF NEWLY SUPPLIED MECHANICAL ITEMS/UNIT FOR SHIFTING OF MATERIAL FROM STORE/YARD TO SITE,ERECTION, ALIGNMENT,WELDING,PAINTING(SUPPLY & APPLICATION), NDT,TESTING, COMMISSIONING & PG TEST ETC. FOR DE-NOX SYSTEM OF BOILER U#1&2 AT DVC –RTPS(2X600MW)

A) NEWLY SUPPLIED ITEMS(ITEMS ARE GIVEN IN PER UNIT)

DU	PGMA	DU Desc	Unit	DU Qty	DU Wt in kgs/Unit
A. PRESSURE PARTS					
F4254106500001	06-500	BOFA PANEL (OFA-1 &OFA-3)	NO	2.000	3,259.500
F4254106500002	06-500	BOFA PANEL (OFA-2 &OFA-4)	NO	2.000	3,268.400
F4254106500003	06-500	ERECTION MATERIALS	NO	1.000	213.120
F4254106655001	06-655	BENT TUBE D51X7.1	NO	4.000	26.080
F4254106655002	06-655	PLATE 6 THK.	NO	4.000	1.160
F4254106655003	06-655	ROD D6	NO	2.000	0.340
F4254106655004	06-655	SEAL BOX	NO	2.000	32.200
F4254106655005	06-655	SCALLOPED BAR	NO	2.000	4.460
F4254106655006	06-655	SCALLOPED BAR	NO	2.000	2.880
F4254106655007	06-655	PLATE 6 THK.	NO	2.000	1.580
F4254108006001	08-006	LINK	NO	4.000	18.720
F4254108006002	08-006	PIN	NO	16.000	24.640
F4254108006003	08-006	WASHER	NO	64.000	25.600
F4254108006004	08-006	T-PLATE	NO	8.000	96.080
F4254108006005	08-006	PLATE	NO	8.000	81.600
F4254108006006	08-006	PLATE 20	NO	4.000	3.760
F4254108006007	08-006	LINK	NO	4.000	25.520
F4254108006008	08-006	LINK	NO	4.000	18.440
F4254108006009	08-006	LINK	NO	4.000	31.400
F4254108006010	08-006	LINK	NO	16.000	94.720
F4254108006011	08-006	PLATE 36	NO	8.000	13.600
F4254108006012	08-006	PIN	NO	16.000	29.440
F4254108006013	08-006	BOLT-M20X70 -4.6-IS1363P1	NO	32.000	7.456
F4254108006014	08-006	NUT HEX GR C M20	NO	32.000	2.240
F4254108006015	08-006	WASHER PNCHD A20	NO	32.000	0.544
F4254108006016	08-006	PLATE 25	NO	1.000	196.250
F4254108006017	08-006	PLATE 20	NO	1.000	157.000
F4254108006018	08-006	PLATE	NO	16.000	30.720
F4254106500001	06-500	BOFA PANEL (OFA-1 &OFA-3)	NO	2.000	3,259.500
F4254106500002	06-500	BOFA PANEL (OFA-2 &OFA-4)	NO	2.000	3,268.400
F4254106500003	06-500	ERECTION MATERIALS	NO	1.000	213.120
F4254106655001	06-655	BENT TUBE D51X7.1	NO	4.000	26.080
F4254106655002	06-655	PLATE 6 THK.	NO	4.000	1.160

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 40 OF 62

F4254106655003	06-655	ROD D6	NO	2.000	0.340
F4254106655004	06-655	SEAL BOX	NO	2.000	32.200
F4254106655005	06-655	SCALLOPED BAR	NO	2.000	4.460
F4254106655006	06-655	SCALLOPED BAR	NO	2.000	2.880
F4254106655007	06-655	PLATE 6 THK.	NO	2.000	1.580
F4254108006001	08-006	LINK	NO	4.000	18.720
F4254108006002	08-006	PIN	NO	16.000	24.640
SUB-TOTAL WEIGHT OF PR PARTS ITEMS IN KGS					7,667.45
B. INSULATION ITEMS					
F4254132310001	32-310	PLATE - 5	NO	2.000	24.492
F4254132310002	32-310	PLATE - 5	NO	4.000	11.020
F4254132310003	32-310	PLATE - 5	NO	4.000	5.652
F4254132310004	32-310	PLATE - 5	NO	4.000	4.900
F4254132310005	32-310	PLATE - 5	NO	4.000	2.512
F4254132310006	32-310	OUTER PIPE	NO	2.000	1.928
F4254132310007	32-310	NON ASB COMP.FIBRE JOINT-2MM- OD111/ID105	NO	4.000	0.188
F4254132310008	32-310	HR GLASS DIA109MM X 5MM THK	NO	4.000	0.800
F4254132310009	32-310	PIPE CAP DIA 130	NO	2.000	9.184
F4254132310010	32-310	INNER PIPE	NO	2.000	4.284
F4254132310011	32-310	ERW TUBE NB25 MEDIUM	NO	2.000	0.714
F4254132310012	32-310	FLEX HOSE 25MM BORE RAYON BRAIDED	NO	2.000	10.000
F4254132310013	32-310	HEX HD SCRU-M12X50 -4.6-IS1363P2	NO	44.000	2.596
F4254132310014	32-310	NUT -M12 -CL4-IS1363P3	NO	44.000	0.880
F4254132310015	32-310	PUN WASHER-M12 -IS2016-A	NO	44.000	0.440
F4254132310016	32-310	MILL BOARD 25 MM - TP 23296	KG	5.000	5.000
F4254132310017	32-310	FIXING PIN L - 195	NO	9,500.000	408.500
F4254132310018	32-310	RETAINER TYPE-A	NO	9,500.000	589.000
F4254132310019	32-310	AL CASING SUPPORT 03-650L	NO	3,150.000	472.500
F4254132310020	32-310	TAPSCREW-ST 4.2X13C	NO	57,000.000	57.000
F4254132310021	32-310	WIRE DIA 0.914 MM - GI - IS280	KG	135.000	135.000
F4254132310022	32-310	PLAINALUMINI SH 1.6 MM THK IS737/19000H2	M2	1,450.000	6,264.000
F4254132310023	32-310	NUT -M10 -CL4-IS1363P3	NO	230.000	2.300
F4254132310024	32-310	SHEET 1.6 MM	NO	20.000	55.020
F4254132310025	32-310	SHEET:3.15	NO	8.000	296.736
F4254132310026	32-310	WELD STUD M10	NO	230.000	49.910
F4254132310027	32-310	WASHER A11	NO	260.000	10.400
F4254132310028	32-310	BENT SHEET	NO	230.000	381.800
F4254132310029	32-310	BRACKET	NO	230.000	99.590
F4254132310030	32-310	SUPPORT SHEET	NO	45.000	9.630
F4254132310031	32-310	CASING SUPPORT	NO	15.000	90.675
F4254132310032	32-310	CASING SUPPORT	NO	15.000	140.550
F4254132310033	32-310	SHEET 2	NO	15.000	188.400
F4254132310034	32-310	ROD D 6.0 MM-IS2062GRA SAE1010/SAE1018	NO	40.000	53.280

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 41 OF 62

F4254132310035	32-310	RETAINER TYPE 'C'	NO	800.000	33.600
F4254132310036	32-310	WELD MESH 50 X 50 WIRE DIA 3MM - IS 1566	M2	160.000	355.040
F4254132310037	32-310	OMEGA STRIP	NO	16.000	92.320
F4254132310038	32-310	CASING SUPPORT	NO	48.000	62.592
F4254132310039	32-310	HEX HD SCRU-M10X20 -4.6-IS1363P2	NO	48.000	1.104
F4254132310040	32-310	NUT -M10 -CL4-IS1363P3	NO	48.000	0.480
F4254132310041	32-310	PUN WASHER-M10 -IS2016-A	NO	48.000	0.480
F4254133212001	33-212	CASTABLEREFRRACTORY GR A	KG	9,000.000	9,000.000
F4254133230001	33-230	POURABLE INSULATION	KG	1,000.000	1,000.000
F4254133321001	33-321	WOOL-100KG/CU.M-50MM ONE SIDE GI WIRENET	M2	3,800.000	20,900.000
SUB-TOTAL WEIGHT OF INSULATION ITEMS IN KGS					47,584.50
C. NON PRESSURE PARTS					
F4254136321001	36-321	FB321-101 ISMB400	NO	1.000	121.049
F4254136321002	36-321	FB321-102 ISMB400	NO	1.000	120.984
F4254136321003	36-321	FB321-103 ISMB125	NO	12.000	191.388
F4254136321004	36-321	FB321-104 ISMB200	NO	2.000	126.466
F4254136321005	36-321	FB321-105 ISMB250	NO	2.000	290.156
F4254136321006	36-321	FB321-106 ISMB250	NO	4.000	550.324
F4254136321007	36-321	FB321-107 ISMB125	NO	2.000	26.590
F4254136321008	36-321	FB321-108 ISMB125	NO	4.000	53.148
F4254136321009	36-321	FB321-109 ISMB200	NO	2.000	60.464
F4254136321010	36-321	FB321-110 ISMB300	NO	2.000	936.386
F4254136321011	36-321	FB321-111 ISMB200	NO	2.000	187.426
F4254136321012	36-321	FB321-112 ISMB125	NO	4.000	63.844
F4254136321013	36-321	FB321-113 ISMB400	NO	2.000	184.494
F4254136321014	36-321	FB321-114 ISMB125	NO	2.000	35.972
F4254136321015	36-321	FB321-115 ISMB125	NO	1.000	19.862
F4254136321016	36-321	FB321-116 ISMB200	NO	1.000	37.649
F4254136321017	36-321	FB321-117 ISMB300	NO	3.000	532.008
F4254136321018	36-321	FB321-118 ISMB300	NO	2.000	355.516
F4254136321019	36-321	FB321-119 ISMB125	NO	1.000	15.356
F4254136321020	36-321	FB321-120 ISMB125	NO	1.000	15.373
F4254136321021	36-321	FB321-121 ISMB125	NO	1.000	13.490
F4254136321022	36-321	FB321-122 ISMB200	NO	1.000	25.552
F4254136321023	36-321	FB321-123 ISMB125	NO	1.000	18.157
F4254136321024	36-321	FB321-124 ISMB200	NO	2.000	68.770
F4254136321025	36-321	FB321-125 ISMB200	NO	1.000	34.404
F4254136321026	36-321	FB321-126 WB600X250-32/16	NO	4.000	5,751.772
F4254136321027	36-321	FB321-127 ISMB125	NO	12.000	191.436
F4254136321028	36-321	FB321-128 ISMB250	NO	3.000	579.867
F4254136321029	36-321	FB321-129 ISMB400	NO	4.000	1,319.416
F4254136321030	36-321	FB321-130 ISMB200	NO	1.000	131.623
F4254136321031	36-321	FB321-131 ISMB125	NO	1.000	15.948
F4254136321032	36-321	FB321-132 ISMB125	NO	1.000	15.940
F4254136321033	36-321	FB321-134 ISMB200	NO	3.000	176.022
F4254136321034	36-321	FB321-135 ISMB300	NO	2.000	227.988

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 42 OF 62

F4254136321035	36-321	FB321-136 ISMB250	NO	1.000	86.163
F4254136321036	36-321	FB321-137 ISMB250	NO	2.000	357.334
F4254136321037	36-321	FB321-138 ISMB125	NO	6.000	79.680
F4254136321038	36-321	FB321-139 ISMB250	NO	2.000	476.694
F4254136321039	36-321	FB321-140 ISMB250	NO	2.000	342.340
F4254136321040	36-321	FB321-141 ISMB200	NO	2.000	126.418
F4254136321041	36-321	FB321-142 ISMB125	NO	2.000	31.870
F4254136321042	36-321	FB321-144 ISMB125	NO	7.000	111.111
F4254136321043	36-321	FB321-146 ISMB125	NO	1.000	15.881
F4254136321044	36-321	FB321-147 WB700X300-32/20	NO	1.000	2,917.842
F4254136321045	36-321	HBR321-101 DBA130X130X12	NO	1.000	252.187
F4254136321046	36-321	HBR321-102 DBA130X130X12	NO	1.000	252.187
F4254136321047	36-321	HBR321-103 DBA100X100X10	NO	2.000	212.372
F4254136321048	36-321	HBR321-104 DBA100X100X10	NO	2.000	241.690
F4254136321049	36-321	HBR321-105 DBA130X130X12	NO	1.000	202.481
F4254136321050	36-321	HBR321-106 DBA130X130X12	NO	1.000	202.478
F4254136321051	36-321	BEAM 125	NO	8.000	106.448
F4254136321052	36-321	BEAM 125	NO	8.000	93.584
F4254136321053	36-321	BEAM 125 X 70	NO	12.000	1,608.000
F4254136321054	36-321	BEAM 150 X 75	NO	4.000	600.000
F4254136321055	36-321	BEAM 200 X 100	NO	3.000	762.000
F4254136321056	36-321	CHANNEL 200 X 75	NO	3.000	669.000
F4254136321057	36-321	BEAM 600 X 210	NO	5.000	7,380.000
F4254136321058	36-321	PLATE 10	NO	2.000	1,177.500
F4254136321059	36-321	PLATE 16	NO	3.000	2,826.000
F4254136321060	36-321	ANGLE 150 X 150 X 12	NO	2.000	546.000
F4254136321061	36-321	CHANNEL 150 X 75	NO	2.000	336.000
F4254136321062	36-321	BEAM 300 X 140	NO	2.000	920.000
F4254136321063	36-321	BEAM 450 X 150	NO	1.000	724.000
F4254136322001	36-322	FB322-201 ISMB600	NO	4.000	3,814.216
F4254136322002	36-322	FB322-202 ISMB600	NO	8.000	7,628.432
F4254136322003	36-322	FB322-203 ISMB125	NO	6.000	46.110
F4254136322004	36-322	FB322-204 ISMB600	NO	4.000	5,794.908
F4254136322005	36-322	FB322-205 ISMB600	NO	4.000	5,807.208
F4254136322006	36-322	FB322-206 ISMB125	NO	2.000	31.870
F4254136322007	36-322	FB322-207 ISMB300	NO	10.000	1,931.400
F4254136322008	36-322	FB322-208 ISMB600	NO	2.000	1,081.778
F4254136322009	36-322	FB322-209 ISMB200	NO	2.000	204.774
F4254136322010	36-322	FB322-210 ISMB250	NO	4.000	535.816
F4254136322011	36-322	FB322-211 ISMB250	NO	4.000	192.700
F4254136322012	36-322	FB322-212 ISMB300	NO	3.000	277.935
F4254136322013	36-322	FB322-213 ISMB250	NO	4.000	295.168
F4254136322014	36-322	FB322-214 ISMB300	NO	1.000	96.192
F4254136322015	36-322	HBR322-101 DBA130X130X12	NO	1.000	273.042
F4254136322016	36-322	HBR322-102 DBA130X130X12	NO	1.000	273.042
F4254136322017	36-322	HBR322-103 DBA80X80X8	NO	1.000	51.398
F4254136322018	36-322	HBR322-104 DBA80X80X8	NO	1.000	65.605

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 43 OF 62

F4254136322019	36-322	HBR322-105 DBA80X80X8	NO	1.000	50.716
F4254136322020	36-322	HBR322-106 DBA80X80X8	NO	1.000	65.595
F4254136322021	36-322	HBR322-107 DBA130X130X12	NO	1.000	220.402
F4254136322022	36-322	HBR322-108 DBA130X130X12	NO	1.000	219.720
F4254136322023	36-322	PLATE 16	NO	3.000	4,710.000
F4254136322024	36-322	BEAM 125 X 70	NO	2.000	268.000
F4254136322025	36-322	BEAM 250 X 125	NO	2.000	746.000
F4254136322026	36-322	BEAM 300 X 140	NO	1.000	460.000
F4254136810001	36-810	LSEFFGG 32 X305X6000	NO	10.000	892.880
F4254136810002	36-810	LSEFFGG 32 X515X6000	NO	22.000	3,219.040
F4254136810003	36-810	LSEFFGG 32 X995X6000	NO	15.000	4,149.600
F4254136810004	36-810	CADMIUM PLATED CLIPS	NO	564.000	33.276
F4254136810005	36-810	PLATE 5.00 MM-IS2062E250A	NO	20.000	75.360
F4254136820001	36-820	VERTICAL LADDER	NO	18.000	456.066
F4254136820002	36-820	SHIP LADDER	NO	2.000	788.476
F4254136820003	36-820	STAIR	NO	4.000	436.168
F4254136820004	36-820	PLATE 10	NO	5.000	1,177.500
F4254136850001	36-850	HANDRAIL FOR PLATFORM-3M ASSY	NO	61.000	2,107.245
F4254136850002	36-850	HANDRAIL FOR PLATFORM-4.5M ASSY	NO	21.000	1,136.898
F4254136850003	36-850	HANDRAIL FOR PLATFORM-6M ASSY	NO	16.000	1,179.680
F4254136850004	36-850	HAND RAIL POST FOR PLATFORM	NO	265.000	860.720
F4254136850005	36-850	MIDDLE HANDRAIL FOR PLATFORM	NO	485.000	2,250.400
F4254136850006	36-850	90 DEGREE BEND	NO	225.000	318.150
F4254136850007	36-850	135 DEGREE BEND	NO	16.000	18.752
F4254136850008	36-850	ERW TUBE DIA. 42.4 X 3.2	NO	10.000	185.580
F4254136850009	36-850	ISA 65X65X6	M	10.000	58.000
F4254136850010	36-850	GUARD PLATE 6	NO	10.000	117.750
F4254136850011	36-850	SPL.BEND	NO	6.000	14.658
F4254136850012	36-850	ERW TUBE DIA 42.4X3.2;1071	NO	8.000	26.480
F4254136850013	36-850	ERW TUBE DIA 42.4X3.2;1500	NO	16.000	74.240
F4254137810001	37-810	CORRU.ALU.SHEET 1.6X920X1200-QTY-86 NOS	KG	539.208	539.208
F4254137810002	37-810	CORRU.ALU.SHEET 1.6X920X1500-QTY-44 NOS	KG	344.842	344.842
F4254137810003	37-810	CORRU.ALU.SHEET 1.6X920X1600-QTY-44 NOS	KG	367.832	367.832
F4254145200001	45-200	SADC POWER CYLINER 4" X 4" (UPWARD MTG)	NO	8.000	120.000
F4254145200002	45-200	SADC POWER CYLINER 4" X 4"(DOWNWARD MTG)	NO	8.000	120.000
F4254145200003	45-200	BURNER TILT POWER CYLINDER	NO	4.000	800.000
F4254145220001	45-220	FLAT 50 X 6; L=130	NO	24.000	7.200
F4254145220002	45-220	FLAT 50X6; L=17	NO	8.000	0.320
F4254145220003	45-220	PIPE CLAMP FL 50X6; L=97	NO	20.000	4.560
F4254145220004	45-220	TUBE NB25 D33.4 X 3.38	M	15.000	37.500
F4254145220005	45-220	TUBE NB 40 D48.3 X 3.68	M	10.000	40.500
F4254145320001	45-320	ANGLE FOR COAL COMPT. ISA 50X50X6-1215L	NO	32.000	174.976

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 44 OF 62

F4254145321001	45-321	WING ASSLY. CORNERS 1&3	NO	2.000	247.074
F4254145321002	45-321	WING ASSLY. CORNERS 1&3	NO	2.000	208.598
F4254145321003	45-321	WING ASSLY. CORNERS 2&4	NO	2.000	251.994
F4254145321004	45-321	WING ASSLY. CORNERS 2&4	NO	2.000	208.920
F4254145321005	45-321	SLOTTED PL(COR 1&3) PLATE 25X200X335	NO	2.000	23.632
F4254145321006	45-321	SLOTTED PL(COR 2&4) PL 25X200X350	NO	2.000	24.726
F4254145321007	45-321	SLOTTED PLATE(COR 2&4) PL.25X200X450	NO	2.000	32.384
F4254145321008	45-321	SLOTTED PLATE(COR 2&4) PL.25X200X450	NO	2.000	32.372
F4254145321009	45-321	SHIM PL.10X400X150	NO	8.000	14.000
F4254145321010	45-321	SHEAR PIN D 25;69	NO	4.000	1.096
F4254145321011	45-321	SUPPORT PLATE PL 6X75X200	NO	32.000	15.040
F4254145321012	45-321	TUBE D42.4X3.20 L=230	NO	16.000	11.360
F4254145321013	45-321	ANCHOR PIVOT PIN D 33 ; 244	NO	16.000	17.600
F4254145321014	45-321	SPLIT PIN 4X56MM	NO	16.000	0.128
F4254145321015	45-321	SHIM PL 10X150X150	NO	16.000	28.000
F4254145321016	45-321	FRAME	NO	8.000	311.528
F4254145321017	45-321	PLATE PL.6X175X2614	NO	8.000	172.200
F4254145321018	45-321	PLATE PL.6X150X1187	NO	8.000	67.072
F4254145321019	45-321	SH.2.5X272X1187	NO	8.000	50.712
F4254145321020	45-321	SUPPORT CLIP FL 50X6:233	NO	96.000	52.704
F4254145321021	45-321	CERAMIC CLOTH SH.3X 80;10MR	NO	4.000	7.680
F4254145321022	45-321	HEX HD BOLT M24X65 CL:10.9	NO	184.000	62.560
F4254145321023	45-321	HEX NUT M24-10	NO	184.000	20.240
F4254145321024	45-321	MACHINED WASHER 25	NO	40.000	1.280
F4254145321025	45-321	BURNER FRAME WASHER	NO	144.000	10.080
F4254145321026	45-321	PEDESTAL	NO	4.000	56.400
F4254145321027	45-321	BOLT HEX M16X60	NO	16.000	1.968
F4254145321028	45-321	HEX NUT M16	NO	16.000	0.480
F4254145321029	45-321	PLAIN WASHER A16	NO	16.000	0.608
F4254145321030	45-321	YAW MECHANISM CNR 2&CNR 2&4	NO	8.000	380.192
F4254145321031	45-321	YAW MECHANISM CCOFA CNR 1&3	NO	8.000	380.192
F4254145321032	45-321	YAW MECHANISM AUX AIR CNR 1&2	NO	2.000	87.644
F4254145321033	45-321	YAW MECHANISM AUX AIR CNR 3&4	NO	2.000	87.644
F4254145321034	45-321	INNER/OUTER PANEL PL 6X1300X2700	NO	4.000	661.284
F4254145321035	45-321	PACKING CLOTH SH 3X40X40 MR	NO	4.000	15.360
F4254145321036	45-321	HIGH TEMP LUBRICANT	NO	2.000	1.000
F4254145321037	45-321	ANTI SIEZE COMPOUNT T	KG	2.000	2.000
F4254145321038	45-321	PLATE 12X420X32	NO	42.000	53.172
F4254145321039	45-321	SHEET 2X288X371	NO	20.000	23.500
F4254145321040	45-321	HEX NUT M8	NO	160.000	0.480
F4254145321041	45-321	HEX HD SCRU-M8X16	NO	160.000	1.760
F4254145321042	45-321	FIXING PIN FOR INSULATION DIA-6, L-105	NO	80.000	1.840
F4254145325001	45-325	BOTTOM END AIR NOZZLE TIP	NO	2.000	149.200
F4254145325002	45-325	COAL NOZZLE TIP ASSLY -	NO	16.000	2,909.376

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 45 OF 62

F4254145325003	45-325	OIL NOZZLE TIP	NO	12.000	1,328.040
F4254145325004	45-325	AUX AIR NOZZLE TIP W/YAW ASSY - CNRS1&3	NO	2.000	273.366
F4254145325005	45-325	TOP END AIR NOZZLE TIP	NO	2.000	124.898
F4254145325006	45-325	CCOFA AIR NOZZLE TIPW/ YAW ASSY- CNRS1&3	NO	8.000	856.856
F4254145325007	45-325	SEAL PLATE FOR COAL TIP	NO	16.000	245.760
F4254145325008	45-325	TILT PIN - COAL COMPARTMENT	NO	16.000	2.048
F4254145325009	45-325	TILT PIN - OTHER COMPARTMENTS	NO	26.000	2.678
F4254145325010	45-325	PIVOT PIN FOR COAL TIP (D=23.5)	NO	32.000	10.176
F4254145325011	45-325	HIGH TEMP (750F & ABOVE) SPRAY LUBRICANT	NO	2.000	1.000
F4254145325012	45-325	ANTI SIEZE THREAD LUBRICANT	KG	1.000	1.000
F4254145325013	45-325	ANGLE 75X75X6;L=810	NO	36.000	198.288
F4254145325014	45-325	ANGLE 50 X 50 X 6 -IS2062E250A	NO	16.000	58.320
F4254145325015	45-325	PL 6X180X300	NO	28.000	73.220
F4254145325016	45-325	BOTTOM END AIR NOZZLE TIP	NO	2.000	149.200
F4254145325017	45-325	COAL NOZZLE TIP ASSLY	NO	16.000	2,909.376
F4254145325018	45-325	OIL NOZZLE TIP	NO	12.000	1,328.040
F4254145325019	45-325	AUX AIR NOZZLE TIP W/ YAW ASSY CNRS2&4	NO	2.000	273.366
F4254145325020	45-325	TOP END AIR NOZZLE TIP	NO	2.000	124.898
F4254145325021	45-325	CCOFA AIR NOZZLE TIPW/ YAW ASSY- CNRS2&4	NO	8.000	856.856
F4254145325022	45-325	SEAL PLATE FOR COAL TIP	NO	16.000	245.760
F4254145325023	45-325	TILT PIN - COAL COMPARTMENT	NO	16.000	2.048
F4254145325024	45-325	TILT PIN - OTHER COMPARTMENTS	NO	26.000	2.678
F4254145325025	45-325	PIVOT PIN FOR COAL TIP (D=23.5)	NO	32.000	10.176
F4254145325026	45-325	HIGH TEMP (750F & ABOVE) SPRAY LUBRICANT	NO	2.000	1.000
F4254145325027	45-325	ANTI SIEZE THREAD LUBRICANT	KG	1.000	1.000
F4254145325028	45-325	ANGLE 75X75X6;L=810	NO	36.000	198.288
F4254145325029	45-325	ANGLE 50 X 50 X 6 -IS2062E250A	NO	16.000	58.320
F4254145325030	45-325	PL 6X180X300	NO	28.000	73.220
F4254145804001	45-804	BOFA ASSY COR 1 & 3	NO	2.000	8,708.136
F4254145804002	45-804	BOFA ASSY COR 2 & 4	NO	2.000	8,715.200
F4254148207001	48-207	HOLLOW SQUARE PITOTTUBE	NO	2.000	1,395.006
F4254148262001	48-262	STRAIGHT DUCT WALL	NO	4.000	1,237.848
F4254148262002	48-262	STRAIGHT DUCT WALL	NO	4.000	1,158.448
F4254148262003	48-262	TRUSS	NO	8.000	129.824
F4254148262004	48-262	STRAIGHT DUCT WALL	NO	4.000	362.076
F4254148262005	48-262	STRAIGHT DUCT WALL	NO	4.000	329.400
F4254148262006	48-262	STRAIGHT DUCT WALL	NO	4.000	537.624
F4254148262007	48-262	STRAIGHT DUCT WALL	NO	4.000	484.248
F4254148262008	48-262	TRUSS	NO	8.000	129.824
F4254148262009	48-262	STRAIGHT DUCT WALL	NO	4.000	1,535.128
F4254148262010	48-262	STRAIGHT DUCT WALL	NO	4.000	1,503.620
F4254148262011	48-262	STRAIGHT DUCT WALL	NO	4.000	1,418.784

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 46 OF 62

F4254148262012	48-262	STRAIGHT DUCT WALL	NO	4.000	1,822.968
F4254148262013	48-262	STRAIGHT DUCT WALL	NO	4.000	945.996
F4254148262014	48-262	STRAIGHT DUCT WALL	NO	4.000	1,370.444
F4254148262015	48-262	TRUSS	NO	24.000	389.472
F4254148262016	48-262	TRANSITION DUCT WALL	NO	2.000	520.656
F4254148262017	48-262	TRANSITION DUCT WALL	NO	2.000	520.628
F4254148262018	48-262	TRANSITION DUCT WALL	NO	2.000	731.762
F4254148262019	48-262	TRANSITION DUCT WALL	NO	2.000	731.752
F4254148262020	48-262	TRANSITION DUCT WALL	NO	2.000	575.992
F4254148262021	48-262	TRANSITION DUCT WALL	NO	2.000	671.252
F4254148262022	48-262	TRANSITION DUCT WALL	NO	2.000	716.130
F4254148262023	48-262	TRANSITION DUCT WALL	NO	2.000	810.816
F4254148262024	48-262	TRUSS	NO	8.000	129.824
F4254148262025	48-262	TRUSS	NO	8.000	143.384
F4254148262026	48-262	T-DUCT WALL	NO	2.000	769.906
F4254148262027	48-262	T-DUCT WALL	NO	2.000	779.438
F4254148262028	48-262	T-DUCT WALL	NO	4.000	971.952
F4254148262029	48-262	"ISA75X75X6,2160"	NO	4.000	58.720
F4254148262030	48-262	T-DUCT WALL	NO	2.000	1,095.240
F4254148262031	48-262	T-DUCT WALL	NO	2.000	1,095.240
F4254148262032	48-262	T-DUCT WALL	NO	2.000	1,123.966
F4254148262033	48-262	T-DUCT WALL	NO	2.000	1,123.754
F4254148262034	48-262	"ISA75X75X6,2160"	NO	4.000	58.720
F4254148262035	48-262	TRUSS	NO	12.000	149.556
F4254148262036	48-262	TRUSS	NO	8.000	153.056
F4254148262037	48-262	TRUSS	NO	6.000	71.508
F4254148262038	48-262	TRUSS	NO	2.000	26.506
F4254148262039	48-262	BEND DUCT WALL	NO	2.000	529.696
F4254148262040	48-262	BEND DUCT WALL	NO	2.000	562.860
F4254148262041	48-262	BEND DUCT WALL	NO	2.000	300.186
F4254148262042	48-262	BEND DUCT WALL	NO	2.000	300.186
F4254148262043	48-262	BEND DUCT WALL	NO	2.000	474.934
F4254148262044	48-262	BEND DUCT WALL	NO	2.000	445.580
F4254148262045	48-262	BEND DUCT WALL	NO	2.000	445.580
F4254148262046	48-262	TRUSS	NO	16.000	199.408
F4254148262047	48-262	BEND DUCT WALL	NO	4.000	6.636
F4254148262048	48-262	STRAIGHT DUCT WALL	NO	2.000	781.246
F4254148262049	48-262	STRAIGHT DUCT WALL	NO	2.000	866.300
F4254148262050	48-262	TRUSS	NO	8.000	99.704
F4254148262051	48-262	STRAIGHT DUCT WALL	NO	2.000	756.064
F4254148262052	48-262	STRAIGHT DUCT WALL	NO	2.000	837.314
F4254148262053	48-262	TRUSS	NO	8.000	99.704
F4254148262054	48-262	BEND DUCT WALL	NO	1.000	139.762
F4254148262055	48-262	BEND DUCT WALL	NO	1.000	189.156
F4254148262056	48-262	BEND DUCT WALL	NO	1.000	383.695
F4254148262057	48-262	BEND DUCT WALL	NO	1.000	291.166
F4254148262058	48-262	BEND DUCT WALL	NO	1.000	158.371

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 47 OF 62

F4254148262059	48-262	BEND DUCT WALL	NO	1.000	158.371
F4254148262060	48-262	BEND DUCT WALL	NO	1.000	296.566
F4254148262061	48-262	BEND DUCT WALL	NO	1.000	296.566
F4254148262062	48-262	TRUSS	NO	8.000	99.704
F4254148262063	48-262	BEND DUCT WALL	NO	2.000	15.794
F4254148262064	48-262	BEND DUCT WALL	NO	1.000	154.257
F4254148262065	48-262	BEND DUCT WALL	NO	1.000	189.156
F4254148262066	48-262	BEND DUCT WALL	NO	1.000	398.189
F4254148262067	48-262	BEND DUCT WALL	NO	1.000	291.166
F4254148262068	48-262	BEND DUCT WALL	NO	1.000	170.962
F4254148262069	48-262	BEND DUCT WALL	NO	1.000	170.962
F4254148262070	48-262	BEND DUCT WALL	NO	1.000	296.566
F4254148262071	48-262	BEND DUCT WALL	NO	1.000	296.566
F4254148262072	48-262	TRUSS	NO	8.000	99.704
F4254148262073	48-262	BEND DUCT WALL	NO	2.000	15.794
F4254148262074	48-262	TRANSITION DUCT WAL L	NO	2.000	618.454
F4254148262075	48-262	TRANSITION DUCT WALL	NO	2.000	635.456
F4254148262076	48-262	TRANSITION DUCT WAL L	NO	2.000	427.216
F4254148262077	48-262	TRANSITION DUCT WALL	NO	2.000	436.564
F4254148262078	48-262	TRUSS	NO	2.000	40.978
F4254148262079	48-262	TRUSS	NO	2.000	40.980
F4254148262080	48-262	TRUSS	NO	4.000	29.060
F4254148262081	48-262	BEND DUCT WALL	NO	2.000	306.154
F4254148262082	48-262	BEND DUCT WALL	NO	2.000	331.750
F4254148262083	48-262	BEND DUCT WALL	NO	2.000	371.942
F4254148262084	48-262	BEND DUCT WALL	NO	2.000	208.886
F4254148262085	48-262	BEND DUCT WALL	NO	2.000	208.886
F4254148262086	48-262	STRAIGHT DUCT WALL	NO	4.000	875.664
F4254148262087	48-262	STRAIGHT DUCT WALL	NO	4.000	776.636
F4254148262088	48-262	TRUSS	NO	8.000	99.704
F4254148262089	48-262	TRANSITION DUCT WALL	NO	2.000	539.540
F4254148262090	48-262	TRANSITION DUCT WAL L	NO	2.000	524.196
F4254148262091	48-262	TRANSITION DUCT WALL	NO	2.000	368.428
F4254148262092	48-262	TRANSITION DUCT WALL	NO	2.000	358.148
F4254148262093	48-262	TRUSS	NO	4.000	81.964
F4254148262094	48-262	TRUSS	NO	4.000	29.064
F4254148262095	48-262	BEND DUCT WALL	NO	2.000	271.046
F4254148262096	48-262	BEND DUCT WALL	NO	2.000	700.072
F4254148262097	48-262	BEND DUCT WALL	NO	2.000	215.148
F4254148262098	48-262	BEND DUCT WALL	NO	2.000	215.148
F4254148264001	48-264	EXPJT FULL SIZE 2900X2900XSTYLE 2	NO	12.000	4,059.708
F4254148264002	48-264	EXPJT FULL SIZE 2050X2050XSTYLE 4	NO	2.000	1,602.584
F4254148264003	48-264	EXPJT FULL SIZE 2654X1506XSTYLE 4	NO	2.000	1,595.752
F4254148264004	48-264	EXPJT FULL SIZE 2050X2050XSTYLE 4	NO	2.000	1,602.584
F4254148264005	48-264	EXPJT FULL SIZE 2654X1566XSTYLE 4	NO	2.000	1,602.552
F4254148265001	48-265	RESTRAINT-1	NO	32.000	360.288
F4254148265002	48-265	RESTRAINT-2	NO	16.000	179.696

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 48 OF 62

F4254148265003	48-265	RESTRAINT-3	NO	12.000	404.304
F4254148265004	48-265	RESTRAINT-4	NO	4.000	115.240
F4254148265005	48-265	RESTRAINT-5	NO	8.000	270.432
F4254148265006	48-265	CHANNEL BOX-1	NO	4.000	793.960
F4254148265007	48-265	CHANNEL BOX-2	NO	4.000	715.384
F4254148265008	48-265	CHANNEL BOX-3	NO	4.000	659.584
F4254148265009	48-265	RESTRAINT-6	NO	4.000	129.888
F4254148265010	48-265	RESTRAINT-7	NO	4.000	153.852
F4254148265011	48-265	PLT 16;300X250	NO	8.000	75.360
F4254148265012	48-265	PLT 16;250X154	NO	16.000	77.376
F4254148265013	48-265	PLT 16;300X300	NO	24.000	271.296
F4254148265014	48-265	CHANNEL BOX-4	NO	8.000	872.816
F4254148265015	48-265	CHANNEL BOX-5	NO	12.000	1,153.152
F4254148265016	48-265	RESTRAINT-8	NO	16.000	228.528
F4254148265017	48-265	SUPPORT BEAM-1	NO	4.000	215.748
F4254148265018	48-265	ISMB150;2010	NO	4.000	120.600
F4254148265019	48-265	PLT 16;250X180	NO	4.000	22.608
F4254148265020	48-265	PLT 16;624X125	NO	2.000	19.594
F4254148265021	48-265	PLT 16;250X250	NO	4.000	31.400
F4254148265022	48-265	PLT 16;684X250	NO	4.000	85.912
F4254148265023	48-265	STIFF CHANNEL-1	NO	2.000	18.190
F4254148265024	48-265	STIFF CHANNEL-2	NO	2.000	18.190
F4254148265025	48-265	STIFF CHANNEL-3	NO	4.000	45.452
F4254148265026	48-265	STIFF CHANNEL-4	NO	4.000	45.452
F4254148265027	48-265	RESTRAINT-9	NO	2.000	65.062
F4254148265028	48-265	CHANNEL BOX-6	NO	4.000	469.884
F4254148265029	48-265	CHANNEL BOX-7	NO	1.000	117.471
F4254148265030	48-265	CHANNEL BOX-8	NO	2.000	234.942
F4254148265031	48-265	CHANNEL BOX-9	NO	1.000	117.471
F4254148265032	48-265	CHANNEL BOX-10	NO	8.000	540.288
F4254148265033	48-265	STOPPER	NO	12.000	20.724
F4254148265034	48-265	PIN TIE	NO	4.000	163.156
F4254148915001	48-915	MAN HOLE DOOR 450X450 - CS	NO	6.000	346.296
F4254148993001	48-993	PLATE 5	M2	30.000	1,177.500
F4254148993002	48-993	ISA 75X75X6; 15 RM	M	15.000	102.000
F4254148993003	48-993	ISM 125; 15 RM	M	15.000	196.500
F4254148993004	48-993	ISM 150; 15 RM	M	15.000	252.000
F4254148993005	48-993	ISM 200; 10 RM	M	10.000	223.000
F4254148993006	48-993	PIPE DIA76X3.6 15RM	M	15.000	96.300
F4254148993007	48-993	PLATE 10 MM	M2	5.000	392.500
F4254148993008	48-993	PLATE 16	M2	5.000	628.000
F4254148993009	48-993	ISM 150; 5 M	M	5.000	75.000
F4254148993010	48-993	SLIDE BEARING PLATE(ASBESTOS FREE)	NO	30.000	136.110
F4254148993011	48-993	GRAB BAR-1	NO	6.000	20.400
F4254148993012	48-993	GRAB BAR-2	NO	6.000	51.840

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 49 OF 62

F4254136321001	36-321	FB321-101 ISMB400	NO	1.000	121.049
F4254136321002	36-321	FB321-102 ISMB400	NO	1.000	120.984
F4254136321003	36-321	FB321-103 ISMB125	NO	12.000	191.388
F4254136321004	36-321	FB321-104 ISMB200	NO	2.000	126.466
F4254136321005	36-321	FB321-105 ISMB250	NO	2.000	290.156
F4254136321006	36-321	FB321-106 ISMB250	NO	4.000	550.324
F4254136321007	36-321	FB321-107 ISMB125	NO	2.000	26.590
F4254136321008	36-321	FB321-108 ISMB125	NO	4.000	53.148
F4254136321009	36-321	FB321-109 ISMB200	NO	2.000	60.464
F4254136321010	36-321	FB321-110 ISMB300	NO	2.000	936.386
F4254136321011	36-321	FB321-111 ISMB200	NO	2.000	187.426
F4254136321012	36-321	FB321-112 ISMB125	NO	4.000	63.844
F4254136321013	36-321	FB321-113 ISMB400	NO	2.000	184.494
F4254136321014	36-321	FB321-114 ISMB125	NO	2.000	35.972
F4254136321015	36-321	FB321-115 ISMB125	NO	1.000	19.862
F4254136321016	36-321	FB321-116 ISMB200	NO	1.000	37.649
F4254136321017	36-321	FB321-117 ISMB300	NO	3.000	532.008
F4254136321018	36-321	FB321-118 ISMB300	NO	2.000	355.516
F4254136321019	36-321	FB321-119 ISMB125	NO	1.000	15.356
F4254136321020	36-321	FB321-120 ISMB125	NO	1.000	15.373
F4254136321021	36-321	FB321-121 ISMB125	NO	1.000	13.490
F4254136321022	36-321	FB321-122 ISMB200	NO	1.000	25.552
F4254136321023	36-321	FB321-123 ISMB125	NO	1.000	18.157
F4254136321024	36-321	FB321-124 ISMB200	NO	2.000	68.770
F4254136321025	36-321	FB321-125 ISMB200	NO	1.000	34.404
F4254136321026	36-321	FB321-126 WB600X250-32/16	NO	4.000	5,751.772
F4254136321027	36-321	FB321-127 ISMB125	NO	12.000	191.436
F4254136321028	36-321	FB321-128 ISMB250	NO	3.000	579.867
F4254136321029	36-321	FB321-129 ISMB400	NO	4.000	1,319.416
F4254136321030	36-321	FB321-130 ISMB200	NO	1.000	131.623
F4254136321031	36-321	FB321-131 ISMB125	NO	1.000	15.948
F4254136321032	36-321	FB321-132 ISMB125	NO	1.000	15.940
F4254136321033	36-321	FB321-134 ISMB200	NO	3.000	176.022
F4254136321034	36-321	FB321-135 ISMB300	NO	2.000	227.988
F4254136321035	36-321	FB321-136 ISMB250	NO	1.000	86.163
F4254136321036	36-321	FB321-137 ISMB250	NO	2.000	357.334
F4254136321037	36-321	FB321-138 ISMB125	NO	6.000	79.680
F4254136321038	36-321	FB321-139 ISMB250	NO	2.000	476.694
F4254136321039	36-321	FB321-140 ISMB250	NO	2.000	342.340
F4254136321040	36-321	FB321-141 ISMB200	NO	2.000	126.418
F4254136321041	36-321	FB321-142 ISMB125	NO	2.000	31.870
F4254136321042	36-321	FB321-144 ISMB125	NO	7.000	111.111
F4254136321043	36-321	FB321-146 ISMB125	NO	1.000	15.881
F4254136321044	36-321	FB321-147 WB700X300-32/20	NO	1.000	2,917.842
F4254136321045	36-321	HBR321-101 DBA130X130X12	NO	1.000	252.187
F4254136321046	36-321	HBR321-102 DBA130X130X12	NO	1.000	252.187
F4254136321047	36-321	HBR321-103 DBA100X100X10	NO	2.000	212.372

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 50 OF 62

F4254136321048	36-321	HBR321-104 DBA100X100X10	NO	2.000	241.690
F4254136321049	36-321	HBR321-105 DBA130X130X12	NO	1.000	202.481
F4254136321050	36-321	HBR321-106 DBA130X130X12	NO	1.000	202.478
F4254136321051	36-321	BEAM 125	NO	8.000	106.448
F4254136321052	36-321	BEAM 125	NO	8.000	93.584
F4254136321053	36-321	BEAM 125 X 70	NO	12.000	1,608.000
F4254136321054	36-321	BEAM 150 X 75	NO	4.000	600.000
F4254136321055	36-321	BEAM 200 X 100	NO	3.000	762.000
F4254136321056	36-321	CHANNEL 200 X 75	NO	3.000	669.000
F4254136321057	36-321	BEAM 600 X 210	NO	5.000	7,380.000
F4254136321058	36-321	PLATE 10	NO	2.000	1,177.500
F4254136321059	36-321	PLATE 16	NO	3.000	2,826.000
F4254136321060	36-321	ANGLE 150 X 150 X 12	NO	2.000	546.000
F4254136321061	36-321	CHANNEL 150 X 75	NO	2.000	336.000
F4254136321062	36-321	BEAM 300 X 140	NO	2.000	920.000
F4254136321063	36-321	BEAM 450 X 150	NO	1.000	724.000
F4254136322001	36-322	FB322-201 ISMB600	NO	4.000	3,814.216
F4254136322002	36-322	FB322-202 ISMB600	NO	8.000	7,628.432
F4254136322003	36-322	FB322-203 ISMB125	NO	6.000	46.110
F4254136322004	36-322	FB322-204 ISMB600	NO	4.000	5,794.908
F4254136322005	36-322	FB322-205 ISMB600	NO	4.000	5,807.208
F4254136322006	36-322	FB322-206 ISMB125	NO	2.000	31.870
F4254136322007	36-322	FB322-207 ISMB300	NO	10.000	1,931.400
F4254136322008	36-322	FB322-208 ISMB600	NO	2.000	1,081.778
F4254136322009	36-322	FB322-209 ISMB200	NO	2.000	204.774
F4254136322010	36-322	FB322-210 ISMB250	NO	4.000	535.816
F4254136322011	36-322	FB322-211 ISMB250	NO	4.000	192.700
F4254136322012	36-322	FB322-212 ISMB300	NO	3.000	277.935
F4254136322013	36-322	FB322-213 ISMB250	NO	4.000	295.168
F4254136322014	36-322	FB322-214 ISMB300	NO	1.000	96.192
F4254136322015	36-322	HBR322-101 DBA130X130X12	NO	1.000	273.042
F4254136322016	36-322	HBR322-102 DBA130X130X12	NO	1.000	273.042
F4254136322017	36-322	HBR322-103 DBA80X80X8	NO	1.000	51.398
F4254136322018	36-322	HBR322-104 DBA80X80X8	NO	1.000	65.605
F4254136322019	36-322	HBR322-105 DBA80X80X8	NO	1.000	50.716
F4254136322020	36-322	HBR322-106 DBA80X80X8	NO	1.000	65.595
F4254136322021	36-322	HBR322-107 DBA130X130X12	NO	1.000	220.402
F4254136322022	36-322	HBR322-108 DBA130X130X12	NO	1.000	219.720
F4254136322023	36-322	PLATE 16	NO	3.000	4,710.000
F4254136322024	36-322	BEAM 125 X 70	NO	2.000	268.000
F4254136322025	36-322	BEAM 250 X 125	NO	2.000	746.000
F4254136322026	36-322	BEAM 300 X 140	NO	1.000	460.000
F4254136810001	36-810	LSEFFGG 32 X305X6000	NO	10.000	892.880
F4254136810002	36-810	LSEFFGG 32 X515X6000	NO	22.000	3,219.040
F4254136810003	36-810	LSEFFGG 32 X995X6000	NO	15.000	4,149.600
F4254136810004	36-810	CADMIUM PLATED CLIPS	NO	564.000	33.276
F4254136810005	36-810	PLATE 5.00 MM-IS2062E250A	NO	20.000	75.360

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 51 OF 62

F4254136820001	36-820	VERTICAL LADDER	NO	18.000	456.066
F4254136820002	36-820	SHIP LADDER	NO	2.000	788.476
F4254136820003	36-820	STAIR	NO	4.000	436.168
F4254136820004	36-820	PLATE 10	NO	5.000	1,177.500
F4254136850001	36-850	HANDRAIL FOR PLATFORM-3M ASSY	NO	61.000	2,107.245
F4254136850002	36-850	HANDRAIL FOR PLATFORM-4.5M ASSY	NO	21.000	1,136.898
F4254136850003	36-850	HANDRAIL FOR PLATFORM-6M ASSY	NO	16.000	1,179.680
F4254136850004	36-850	HAND RAIL POST FOR PLATFORM	NO	265.000	860.720
F4254136850005	36-850	MIDDLE HANDRAIL FOR PLATFORM	NO	485.000	2,250.400
F4254136850006	36-850	90 DEGREE BEND	NO	225.000	318.150
F4254136850007	36-850	135 DEGREE BEND	NO	16.000	18.752
F4254136850008	36-850	ERW TUBE DIA. 42.4 X 3.2	NO	10.000	185.580
F4254136850009	36-850	ISA 65X65X6	M	10.000	58.000
F4254136850010	36-850	GUARD PLATE 6	NO	10.000	117.750
F4254136850011	36-850	SPL.BEND	NO	6.000	14.658
F4254136850012	36-850	ERW TUBE DIA 42.4X3.2;1071	NO	8.000	26.480
F4254136850013	36-850	ERW TUBE DIA 42.4X3.2;1500	NO	16.000	74.240
F4254137810001	37-810	CORRU.ALU.SHEET 1.6X920X1200-QTY-86 NOS	KG	539.208	539.208
F4254137810002	37-810	CORRU.ALU.SHEET 1.6X920X1500-QTY-44 NOS	KG	344.842	344.842
F4254137810003	37-810	CORRU.ALU.SHEET 1.6X920X1600-QTY-44 NOS	KG	367.832	367.832
F4254145200001	45-200	SADC POWER CYLINER 4" X 4" (UPWARD MTG)	NO	8.000	120.000
F4254145200002	45-200	SADC POWER CYLINER 4" X 4"(DOWNWARD MTG)	NO	8.000	120.000
F4254145200003	45-200	BURNER TILT POWER CYLINDER	NO	4.000	800.000
F4254145220001	45-220	FLAT 50 X 6; L=130	NO	24.000	7.200
F4254145220002	45-220	FLAT 50X6; L=17	NO	8.000	0.320
F4254145220003	45-220	PIPE CLAMP FL 50X6; L=97	NO	20.000	4.560
F4254145220004	45-220	TUBE NB25 D33.4 X 3.38	M	15.000	37.500
F4254145220005	45-220	TUBE NB 40 D48.3 X 3.68	M	10.000	40.500
F4254145320001	45-320	ANGLE FOR COAL COMPT. ISA 50X50X6-1215L	NO	32.000	174.976
F4254145321001	45-321	WING ASSLY. CORNERS 1&3	NO	2.000	247.074
SUB TOTAL WEIGHT OF NON PRESSURE PARTS IN KGS					1,97,231.63
TOTAL WEIGHT(PP+INS+NPP) IN KGS /UNIT					2,52,483.57
TOTAL WEIGHT (PP+INS+NPP) IN MT //UNIT				252.484 MT	
TOTAL WEIGHT OF ITEMS FOR TWO UNITS				504.968 MT	

Note: Quantity variation as per GCC shall be applicable.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 52 OF 62

50.0

ANNEXURE-III

[REF. PRICE SCHEDULE, VOL-III, SCH-2, SL. NO.C]

TENTATIVE LIST OF NEWLY SUPPLIED C&I & ELECTRICAL ITEMS DETAIL FOR SHIFTING OF MATERIALS FROM STORE/YARD TO SITE,ERECTION,ALIGNMENT , CABLE TRAY ERECTION,CABLE LAYING, CABLE DRESSING AND TAGGING, GLANDING, FERRULING & CABLE /SPLICING,PRE-COMMISSIONING & TESTING,COMMISSIONING ,CHARGING & PG TEST ETC. FOR DE-NOX SYSTEM OF BOILER U#1&2 AT DVC RTPS(2X600MW)

A. NEWLY SUPPLIED ITEMS(PER UNIT)

PGMA	Description	Unit	Qty/Unit
96-485	240V AC UPS DIST. BOARD (WALL MOUNTED)	NO	1.000
97-282	NORMALLY CLOSED SOLENOID VALVE	NO	4.000
97-282	NORMALLY OPEN SOLENOID VALVE	NO	4.000
97-591	BURNER TILT SHEAR PIN FAILURE INDI. BOX a) Junction Box for Shear pin failure indication-4 Nos b)Limit switch for shear pin failure indication-20 Nos	Set	1.000
97-591	HEAVY DUTY LIMIT SWITCH	NO	4.000
97-592	CONNECTOR,1/2" NPT(F) X 1/4" OD, SS	NO	40.000
97-592	CONNECTOR,1/2" NPT(F) X 3/8" OD, SS	NO	5.000
97-592	CONNECTOR,1/4" NPT(M) X 1/4" OD, SS	NO	70.000
97-592	CONNECTOR,3/8" NPT(M) X 3/8" OD, SS	NO	10.000
97-592	EQUAL TEE UNION, 1/4", SS	NO	30.000
97-592	EQUAL TEE UNION, 3/8", SS	NO	5.000
97-592	STRAIGHT CONNECTOR,1/4" OD, SS	NO	60.000
97-592	BULKHEAD CONNECTOR,1/4" BSP(M) X 1/4" OD	NO	60.000
97-592	ELBOW,1/4" BSP(M) X 1/4" BSP(F), SS	NO	60.000
97-592	TAPE, 1/2" -10 METERS, TEFLON	NO	50.000
97-592	FERRULES, 1/4", SS	NO	100.000
97-592	NUTS, 1/4", SS	NO	100.000
97-592	ALUMINIUM STRIPS - 300 MM X 25 MM X 3 MM	NO	250.000
97-592	1/4" OD SS TUBE	M	680.000
97-592	3/8" OD SS TUBE	M	20.000
97-592	1/4" TEFLON HOSE- 2 METER PER PIECE	NO	30.000
95-088	FSSS FLAME SCANNERS items	Set	1
	Flame Scanner Pigtail Cable	No	9
97596	ASSISTANCE FOR E&C OF FIXED HD CCTV CAMERA FOR HOPPER VIEWING	Nos	4
97596	ASSISTANCE FOR E&C ACCESSORIES FOR FIXED HD CAMERA	Set	1

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 53 OF 62

	SYSTEM		
	INSTRUMENTATION CABLES(F TYPE): a) 2PX0.5 Sq mm: 750 mtrs/Unit b) 4PX0.5 Sq mm: 4425 mtrs/Unit c) 8PX0.5 Sq mm: 1250 mtrs/Unit	Set	1
	POWER CABLES/CONTROL CABLES: a) 2CX2.5 Sq mm control cable:Qty1050 Mtrs/Unit b) 3CX2.5 Sq mm control cable:Qty 1050 Mtrs/Unit c) 10CX2.5 Sq mm power cable:Qty 1200 Mtrs/Unit d) 3CX10 Sq mm power cable: Qty 550 Mtrs/Unit	Set	1
	CABLE TRAYS a) Height 25 mm, Width 50 mm, Qty 125 Mtrs/Unit b) Height 40 mm, Width 100 mm, With Cover: Qty 415 Mtrs/Unit c) Height 40 mm, Width 150 mm, With Cover: Qty 50 Mtrs/Unit	Set	1
	JUNCTION BOX a) 24 Way JB: Qty 4 Nos b) 48 Way JB: Qty 2 Nos	Set	1
	CO Analyser & Panel	Sets	2
	Electronic Transmitters	Nos	2
	Local Instrument Enclosure	Nos	3
	SOCKET WELD FITTINGS a) COUPLING A105 : 3/4" NB-SW 3000: 30 Nos/ Unit b) REDUCER A105 1" X 3/4" 3000: 4 Nos/Unit c) EQUAL TEE A105 :3/4" NB-SW 3000: 4 Nos/Unit	Set	1
	Airfilter Regulator	Nos	4
	Pr switch	Nos	4
	I/p Converter	Nos	4
	LIE/LIR	Sets	2
	Impulse Pipe, ASTM A106 GR C 3/4" NB SCH 80	Mtrs	120
	Cable glands and lugs	set	1
	GI PIPE-1/2" NB "GI pipe-1/2" NB Heavy grade / as per IS1239 threaded ends (1/2" NPT) to be protected Running length 6 Meters"	Mtrs	50
	MS Channel 100x50x5 mm Web thick as per IS 2062 Grade A,	Mtrs	200
	MS Angle 50x50x6 mm Web thick as per IS 2062 Grade A	Mtrs	400
	MS Plate 10mm thick IS2062	Kgs	100
	HR Sheet 2.5mm thick as per IS 1079	Kgs	100
	NIPPLE MAT: ASTM A106 Gr.B SIZE: 1" PLAIN SCH 40 LENGTH = 100 mm	Nos	2
	NIPPLE MAT: ASTM A106 Gr.B SIZE: 3/4" NB SCH 80 / LENGTH = 100 mm ONE END -3/4" NTPM ,OTHER END : PLAINCAP/ ASTM A 105 -SIZE - 3/4" NPTF	Nos	4
	Flexible Hose SS Braided 1/2" OD x 1 Meter with clamps.One end with adopter of 1/2" NPTM and other end with Bras adopter of 1/2" NPTF Rating10 KG/CM2	Set	1
	"Isolation valve Ball type body a 105 &	Nos	2

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 54 OF 62

	Trim=SS 316. Size:1/2"NPTF Pr.Testing:900PSI"		
	COUPLING, MAT spec: ASTM A105 GALVANISED TO 10/15 MICRONS SIZE: 1/2" NPTF/ PR. TESTING: 800 PSI	Nos	35
	ELBOW, MAT Spec: ASTM A105 GALVANISED TO 10/15 MICRONS SIZE: 1/2" NPTF/ PR. TESTING: 800 PSI	Nos	10
	EQUAL TEE, MAT Spec: ASTM A105 GALVANISED TO 10/15 MICRONS SIZE: 1/2" NPTF/ PR. TESTING: 800 PSI	Nos	10
	THREE PIECE UNION, MATL: ASTM A105 GALVANISED TO 10/15 MICRONS, SIZE: 1/2" NPTF, PRESSURE RATING: 800 PSI.	Nos	8
	U CLAMP - TO SUIT 3/4" NB PIPE WITH NUTS AND WASHERS CS GALVANISED TO 10/15 MICRONS	Nos	500

Note: Quantity & Size of C&I & Electrical Works/Items as mentioned above may vary to any extent. No extra paymnet shall be made for quantity/size variation to complet the NOx modification package.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 55 OF 62

51.0

ANNEXURE-IV
[REF. PRICE SCHEDULE, VOL-III, SCH-2, SL. NO.D]

TENTATIVE WEIGHT OF ITEMS (Mechanical/Electrical/C&I) FOR MATERIAL HANDLING IS MENTIONED BELOW. HOWEVER, ACTUAL QTY OF ITEMS TO BE DISMANTLED TO BE DECIDED AS PER ENGINEER I/C.

Approximate weight of Items (Mechanical/Electrical/C&I) for Material Handling/Material Management is 265 MTt/Unit (Refer Annex-II & III for list of items), i.e Total 530 MT for two units.

Shifting/re-stacking of Existing Materials inside covered store/semi covered store/matl yard for is 10 MT/Unit, i.e total 20 MT for two units.

Note: Quantity variation as per GCC shall be applicable.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 56 OF 62

52.0

ANNEXURE-V

TENTATIVE LIST OF T&P & MMD TO BE PROVIDED FOR DE-NOX SYSTEM OF U#1&2 AT DVC RTPS(2X600MW)

SL NO	DESCRIPTION OF EQUIPMENT	CAPACITY	TENTATIVE QUANTITY /Unit
A	T&P		
01	Tyre mounted mobile crane/hydra	12/ 14 T	01 No /Adequate Qty as reqd
02	Tyre mounted mobile crane/hydra	12/ 14 T	01 No minimum for Material Management for total Project
03	Trailer (45-50 ft)	28 T, flat bed	As Required
04	Truck/ tractor trolley	9T/ 12T capacity	01 No /Adequate Qty as reqd
05	Welding Generator / transformer (with welding cables)	As required	As Required
06	Heating torch along with regulator & hoses	As per requirement	As Required
07	TIG set with Argon regulator	As required	As Required
08	Tube Cutting Machine-As reqd	As required	As Required
09	Pre Heat, PWHT/Stress relieving Equipment & accessories	As required	As Required
10	Radiography Equipment	As required	As Required
11	3 phase distribution board with complete set up for drawl of construction power.	400 amp	As Required
12	Winches (electric) (winches also includes wire ropes) Winches (Hand operated)	10 T 05 T 3 T 2 T 1T	10 T-02 Nos Minimum Others, as required
13	Electric cable for drawl & distribution of construction power	As per requirement	As Required
14	Semi-automatic welding m/c	As per requirement	As Required
15	Baking oven and holding oven with thermostat and temperature gauge for baking coated welding electrodes	As per requirement	As Required
16	Portable oven for coated welding electrodes	As per requirement	As Required
17	Hydraulic jacks	As per requirement	As Required
18	Slings, pulleys and de-shakles (from 1T to 10 T)	From 1T to 10 T capacity	As Required
19	Scaffolding pipes	As per requirement	As Required
20	Digital coat meter	As per requirement	As Required
21	LPI kit	As per requirement	As Required
22	All Ring & D.E. Spanners upto 36mm	As per requirement	As Required

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC- (R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 57 OF 62

23	Slogging spanners from 36mm to 100 mm	As per requirement	As Required
24	Adjustable Spanners	As per requirement	As Required
25	Allen key set upto (17 mm)	As per requirement	As Required
26	Hammer upto (05 Kg.)	As per requirement	As Required
27	Screw Driver all sizes	As per requirement	As Required
28	Hack – saw Frame	As per requirement	As Required
29	Files (smooth, rough) round, half round	As per requirement	As Required
30	Inside & Outside Circlip pliers	As per requirement	As Required
31	Wire rope (sling) 8mm, 12mm & 16mm (duly tested) Inappropriate length	As per requirement	As Required
32	D. Shackle 2T, 3T, 5T (duly tested)	As per requirement	As Required
33	Cutting torch along with regulator & hoses	As per requirement	As Required
34	Straight grinder	As per requirement	As Required
35	Chain Pulley block (2T, 3T) (duly tested)	As per requirement	As Required
36	Chain Pulley block (5T) (duly tested)	As per requirement	As Required
37	Angle Grinder	As per requirement	As Required
38	FF2 Grinder	As per requirement	As Required
39	Chisel 5", 12"	As per requirement	As Required
40	Try Square	As per requirement	As Required
41	Portable Electrode Heating oven	As per requirement	As Required
42	Vernier caliper	As per requirement	As Required
43	Measuring Tape (5 M)	As per requirement	As Required
44	Measuring Tape (10 M, 15 M)	As per requirement	As Required
45	Torch	As per requirement	As Required
46	24 V lamps and transformers	As per requirement	As Required
47	Lighting/ Extension Boards with ELCB, industrial plugs 5 point (Upto 15 Amp)	As per requirement	As Required
48	Multipoint Welding Transformer	As per requirement	As Required
49	Phase Sequence Indicator	As per requirement	As Required
50	Tong tester (Up-to 400A Range)	As per requirement	As Required
51	Leakage Tester (DC/AC) - mA Range	As per requirement	As Required
52	Voltmeter (mV – 750V Range)	As per requirement	As Required
53	Insulation Resistance Tester (Megger)	As per requirement	As Required
54	mV/mA Calibrator	As per requirement	As Required
55	Cable Continuity Tester	As per requirement	As Required
56	Micro ohm meter	As per requirement	As Required
57	Special cable (FO/UTP/Ethernet etc) termination kit	As per requirement	As Required
58	3-Phase/ 1-Phase Variac	As per requirement	As Required
59	Winding resistance measuring meter	As per requirement	As Required
60	Digital Multi-meters	As per requirement	As Required
61	LT cable termination kit	As per requirement	As Required
62	2.5 & below lugs.	As per requirement	As Required
63	PVC tape	As per requirement	As Required
64	Ferrule Typing machine	As per requirement	As Required
65	Drill Machine	As per requirement	As Required
66	Cable crimping tools	As per requirement	As Required
67	Electric blower (Normal/Hot)	As per requirement	As Required
68	Bevel Protector/Angle Protector	As per requirement	As Required
69	Other MMD's		

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 58 OF 62

	straight edge, master level, square level, inside & outside micrometer, taper gauge, filler gauge, dial gauge,tape, etc	As per requirement	As per requirement

NOTE	
1.0	Bidder shall note that, this list is not exhaustive and they may be required to provide additional T&Ps not stated in the list for proper execution of job, at no extra cost to BHEL.
2.0	MMD and T&P shall be mobilized and deployed by successful bidder, as required at site for successful execution of the job. Deployment plan of T&P, MMD shall be jointly finalised based on project requirement prior to start of work. The plan might undergo revision depending on project requirement. Depending upon the jointly agreed deployment program, any additional T&P, MMD, if required, for proper completion of job, shall have to be deployed by successful bidder. Similarly, if any of the aforesaid items is not required for the job as per jointly agreed program, successful bidder need not have to deploy the same.
3.0	Apart from above, in case successful bidder fail to deploy other T&Ps as per jointly agreed schedule, BHEL reserve the right to deploy the same at the risk & cost of successful bidder or levy penalty at a rate, to be rationally derived by BHEL. Decision of BHEL shall be final & binding on successful bidder.
4.0	The contractor shall ensure deployment of reliable & calibrated instrument, measuring and test equipment (MMD). The MMD shall have test calibration certificate from authorized/ Govt approved agencies. The contractor shall also keep provision of alternate engagement for such MMD so that the work does not suffer when a particular MMD is sent for calibration. Re-testing/ re-calibration shall also be arranged by the contractor at their own cost at regular interval during the period of use as advised by BHEL.
5.0	Sufficient measures shall be taken by the successful bidder to minimise the radiography test at site and maximise the use of Ultrasonic testing wherever applicable.
6.0	The above major T&P list is indicative only. Additional T&Ps, if required have to be mobilized by the successful bidder within the accepted rate.
7.0	In addition to the above necessary lifting tackles like slings, D-shackles, chain pulley blocks, tripods etc. are to be arranged by bidder. T&P shown in the above mentioned list are minimum requirement. Further requirement will be reviewed time to time at site and vendors will provide additional T&P/ equipments to ensure completion of entire work within schedule time without any financial implication to BHEL. Vendor will give advance intimation & certification regarding capacity etc prior to dispatch of heavy equipment.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 59 OF 62

53.0

ANNEXURE-VI

TENTATIVE LIST OF CONSUMABLES /PROTECTIVE MATERIAL AS REQUIRED TO BE PROVIDED BY THE CONTRACTOR AT NO ADDITIONAL COST

SL NO	DESCRIPTION OF ITEMS
01	Electrodes & Filler Wire for CS, SS, AS – As required except for the special electrodes supplied by BHEL manufacturing units.
02	Different gases like O2, CO2, Nitrogen, Argon, D/A, etc.
03	CTC, petrol, diesel, kerosene, Rustolene.
04	Lapping pastes.
05	NDE consumables.
06	Hoses and clamps of different sizes.
07	Touch-up paints, preservatives and other consumables.
08	Cotton wastes, jutes etc.
09	Primer and finish paint (To be sourced from BHEL approved manufacturer).
10	Grouting cement as applicable.
11	Other consumables to complete the job.
12	All materials including cement, reinforcement steel, structural steel, AC sheeting, Windows, doors, MS/ Aluminum fittings, plastering, painting, flooring, roofing, etc, complete as per drawings, specification, etc, as required for construction of the pit.

NOTE	
1.0	Bidder shall note that this list is not exhaustive and they may be required to provide additional consumables not stated in list for proper execution of job, at no extra cost to BHEL. Successful bidder may have to provide nut, bolt, washer, etc. as referred in exceptional cases in case of any shortage of supply from BHEL's end. Accordingly, total implication in this regard is insignificant in comparison to total magnitude of work and bidder may work out implication of these items base on their previous exposure.
2.0	Deployment plan of major consumables shall be jointly finalised based on project requirement prior to start of work. The plan might undergo revision depending on project requirement. Depending upon the jointly agreed deployment program, any additional consumables, if required for proper completion of job, shall have to be deployed by the successful bidder. Similarly, if any of the aforesaid items is not required for the job as per jointly agreed program, the successful bidder need not have to deploy the same.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 60 OF 62

54.0

ANNEXURE-VII

SPECIFICATION OF PAINTING WORK

1.0	The following Indian Standards may be referred to for carrying out the painting job: IS - 1303, 2379, 1477, 2524, 2395, 2338, 6278, 3140, 158, 2074, 104, and 2932.
2.0	All surfaces to be painted shall be thoroughly cleaned of all grease, oil, loose mill scale, dust, rust and any other foreign matter by mechanical cleaning with power tool, scrapping with steel wire brushes, and sand scrapping with wire brush/emery paper as per requirement. Cleaning with solvents shall be adopted only after approval of the customer.
3.0	After the surface is prepared, one coat of Zinc Phosphate primer conforming to IS: 2074 shall be applied. After first coat is dried up completely, second coat of red oxide primer shall be applied by brushing to ensure continuous film. The dry film thickness of each coat shall be minimum 25 microns.
4.0	Synthetic enamel paint conforming to IS: 2932 shall be used for finish coats. The color/ shade shall be as approved by the customer. After cleaning the dust on the dried up primer, first coat of synthetic enamel shall be applied. After this first coat dries up hard, the surface should be wet scrubbed cutting down to smooth finish and ensuring that at no place the first coat is completely removed. After applying second coat, allowing the water to get evaporated completely, third finish coat of painting shall be applied.
5.0	For all electrical equipment, powder coating shall be done as per the relevant standard.
6.0	Painting and Marking/Labeling of the materials erected. Supply of paints is included in the Scope of Work of the Sub-contractor.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 61 OF 62

55.0

Annexure-VIII

TENTATIVE UNIT WISE COMPLETION SCHEDULE (IN DAYS) FOR DE-NOX SYSTEM OF U#1&2 AT DVC RTPS(2X600MW)

SI No	Description of area/major milestones	RTPS, U#1		RTPS, U#2	
		Start	Finish	Start	Finish
1.	Material Handling	March '2021 to till commissioning of Unit & reconciliation of Material			
2.	Pre Shutdown Activities (25 Days/Unit)	11/06/21	05/07/21	27/03/21	21/04/21
3.	Shutdown/Renovation activities of Boiler De-Nox System (35 Days/Unit)	06/07/21	11/08/21	22/04/21	21/05/21
4.	Post Shutdown Commissioning Activities/Completion of All facilities (60 Days/Unit)	12/08/21	11/10/21	22/9/21	21/11/21

Note:

1. The above schedule is tentative only. The shutdown month/date, Unit number may get pre-ponnd/post pond, vendor will have to arrange full mobilization as per intimation of BHEL site I/C.
2. "Finish" means last day of completion of the period of particular activity.
3. Agency has to deploy resources to carry out parallel work in all units (if needed).
4. Agency should also be geared up to take up shut down works in both units/multiple units simultaneously, if such need arises.

TENDER NO – PSER:SCT:RGN-S2098:21		
VOLUME – IF, TCC-(R-0)	TECHNICAL CONDITION OF CONTRACT, SCOPE, ETC	PAGE 62 OF 62

56.0

Annexure -IX

Receipt, unloading, storage,material transportation (store/yard to site)Dismantling, New Material Erection, Re-Erection of Old Items, Modification of existing Items, Rstoration, Commissioning,Testing & PG Test of Combustion modification system for Nox mitigation at U#1&2 at DVC -RTPS (2x600 MW).			
List of tentative manpower required for the job is mentioned below. Contractor is to depute sufficient manpower to ensure round the clock working			
MANPOWER	CATEGORY	MINIMUM NO. OF MANPOWER PER UNIT	
		DURING SHUTDOWN	DURING PRE-SHUTDOWN
Site Incharge	Highly Skilled	1	1
Safety Engr	Highly Skilled	1	1
Quality Engr/Quality Supervisor	Skilled	1	1
Engineer/Supervisor(Mechnaical)	Skilled	3	1
Engineer/Supervisor(C&I)	Skilled	1	1
Storekeeper	Semi Skilled	1	1
HP Welder(IBR)	Highly Skilled	3	1
Welder(Non-IBR)	Skilled	4	1
Structural welder	Skilled	2	2
fitter(Pressure parts)	Highly Skilled	2	1
fitter(Ducts)	Skilled	2	2
fitter(Structures)	Skilled	2	1
Gas cutter	Skilled	4	2
Sarang	Skilled	2	2
Electrician	Skilled	4	1
Jr. Fitter	Semi-Skilled	4	2
Electricial & C&I Technician	Skilled	6	2
Grinder	Semi-Skilled	4	2
Rigger	Un-skilled	21	8
Helper	Un-skilled	30	8
Expert for Boiler Pr Parts&Burner	Expert	1	0
Material -supervisor	skilled	1	1
	Total	100	42

Note: 1) The above list is for tentative minimum required manpower for the subject job. During execution, as per requirement vendor has to mobilize sufficient manpower to complete the job as per shutdown schedule.In case vendor failed to mobilize sufficient manpower, BHEL shall arrange the same at the risk & cost of the vendor with applicable Overhead.

2) Time is the essence of this contract. Hence contractor must mobilize site with adequate manpower for round the clock 12 hours shifts work during the entire duration.

VOLUME-III PRICE SCHEDULE, REV-00	
JOB: Receipt, unloading, storage,Material Handling, Dismantling, material movement,New Material Erection, Re-Erection of Old Items, Modification of existing Items, Restoration, Commissioning, Testing & PG Test etc.of Combustion modification system for Nox mitigation of DVC Raghunathpur TPS(2x600 MW) U#1,2, PURULIA,West bengal.	
TENDER NO PSER:SCT:RGN-S2098:21	
PREAMBLE	
SL NO	DESCRIPTION
1	This preamble forms part of tender document and schedule of items. The tenderer should read this preamble carefully before filling in rates for various items. Clauses under this preamble shall be read in conjunction with various volumes of tender and other tender sections as applicable and shall have precedence over any contrary statement mentioned any where in this document.
2	The work shall be carried out strictly as per specifications, description of the items in these schedule and / or engineer's instructions. Drawings enclosed with the tender are only preliminary and for guidance/tender purposes giving some idea of the work involved. The work is to be executed as per terms & conditions of the tender and actual drawings/documents, which shall be furnished during execution.
3	Items of work provided in this schedule but not covered in this specification shall be executed strictly as per instruction of the engineer.
4	Unless specifically mentioned otherwise in the tender document, the tenderer shall quote for the finished items and shall provide for the complete cost towards power, fuel, tools, tackles, equipment, constructional plants, temporary works, labour, dismantling of all temporary piping, structures, valves, pumps, tanks & other misc. equipment, strengthening of roads/culverts/bridges etc. including arranging all clearances etc. required for carrying out different activities & tests, materials, levies, transport, layout, repairs, rectification, maintenance till handing over, supervisions, colonies, shops, establishments, overheads, profits and all incidental items not specifically mentioned but reasonably implied and necessary to complete the work according to the complete tender document and this schedule.
5	The quantities of the various items mentioned in this schedule of items are approximate, based on very preliminary information and may vary to any extent or be deleted altogether. The quoted rates of each item will remain firm throughout the period of execution including extension, for reasons whatsoever, as long as variation in the total value of work executed under any part of this contract including extra items, if any but excluding any price variation remains, within plus minus fifteen percent ($\pm 15\%$) of the awarded price as per LOI.
6	Prior written approval of BHEL shall be sought by the contractor in case quantity variation of any item crosses +50% (plus fifty percent) limit during execution and approval to be obtained before execution of further quantity for this item.
7	In case Sealed /Paper Price Bids are opened for finalisation of the tender, for any Item Rate/BOQ based service contract, possibility of variation of quantity/ addition/deletion of items can not be ruled out. Under such circumstances, after execution of work, if it is observed that standing as L-1 is changed based on actual quantity executed, the bidder shall give suitable rebate to maintain your standing as L-1. Since this aspect can be assessed at the end of execution, necessary adjustment will be effected at the end of execution in final bill.This condition shall not be applicable where the tender is finalised through Reverse Auction.
8	BHEL reserve the right to rationalize the rates, quoted by L-1 bidder against unit rate items and/ or other optional items with respect to item-wise lowest rates (amongst the participating bidders), before placement of order. The rates of unit rate/optional items shall remain valid till execution of the order, if the job/work is awarded to the bidder.
9	The rates quoted shall be inclusive of cleaning of site of any vegetation, dressing, clearing of old structures and leveling etc. including fixing of grid pillars, benchmarks etc. required for commencement of site activities. No separate payment will be made towards the same.However, if separate rate for such item is available in the rate schedule, the same shall be considered.
10	Rates shall be quoted in figures and in words in clear legible writing. No overwriting is allowed. All scoring and cancellations should be countersigned and in case of illegibility the interpretation of engineer shall be final. All entries shall be in English language.
11	All works item wise shall be measured upon completion and paid for at the rates quoted and accepted as per BHEL approved payment schedule/billing break-up.
12	The tender shall be deemed to have visited site and made himself aware of all the site conditions, studied the specifications and details of work to be done within the time schedule attached and to have acquainted himself of the conditions prevailing at site before submission of his bid/offer. No claim whatsoever due to lack of knowledge of site conditions shall be entertained after award of the work.
13	No splitting of the job is envisaged unless the same is specifically indicated in the TCC/Vol-1F. Decision of BHEL in this regard shall be final and binding to the bidders.
14	Bidders are not allowed to alter the Price Schedule format including item description,quantity etc. and the offer is liable for rejection if the bidders submit their prices in Price Schedules modified by them.BHEL reserves the right to reject the offers of bidders who submit offers in Price Formats which are modified/altered by them. Also putting any comments instead of rates/price in the designated column of the rate schedule shall make the offer liable for rejection.
15	Bidders to note that for Civil &/Structural packages, against a particular item against a ST No. appearing in more than one schedule of the BOQ, same rate must be quoted in all schedules for that particular items with same descriptions. If by error, different rates are quoted in different schedules for same ST No.(i.e. item with same description), then the higher of the rates shall be considered for evaluation but awarding shall be done with the lower rate, if the bidder becomes L-1. The same modality shall be applicable for other item rate service contracts where item with same description is repeated in different schedules.
16	For Lumpsum Service Contract : The items/components indicated in the tender is indicative and may vary to any extent. No compensation shall be payable in case of any variation in the items/components listed in the bill of quantities if the executed weight remains within the variation limit. However, in case of deletion of any item or addition of new items over and above the items listed or variation of existing quantity beyond variation limit specified, adjustment (i.e. Payment or recovery as the case may be) shall be done on pro-rata basis based on the Rate per MT worked out from the quoted lump-sum Price and the total weight of components listed /indicated in price schedule plus 15% weight variation limit.
17	Engineer's decision shall be final and binding on the contractor regarding clarification of items in the schedule with respect to the other sections/volumes of the contract.
18	In case of tender for Civil and/or Structural works, if the Non-schedule items are not quoted by the bidder, it will be treated at par with rate of corresponding item of CPWD/PWD/DSR schedule as prescribed in the tender/BOQ cum Rate Schedule. PVC/escalation is not payable for these Non-scheduled items.
19	No interest, whatsoever, shall be payable by BHEL on the security deposit, any bank guarantee submitted or any amount due to successful bidder/contractor. No idling charge whatsoever (either for labour or any other resources) is payable by BHEL for any reason whatsoever.
20	Size and weights of various items are mentioned in the attached BOQ cum rate/price schedule for reference purpose only & these shall not be taken into consideration for quoting/calculating amount in the rate schedule. These shall be utilised as per relevant sections of tender. Bidders shall quote for each item in the rate column, taking unit as mentioned in the quantity column. Rates shall be filled in both figures and words. Amount shall be calculated based upon these rates multiplied by the mentioned quantity for the respective items.
21	Bidder's Total price shall be considered for evaluation unless stated otherwise.
22	In case of BOP packages, if Bidder does not quote/indicate the price for freight charges against indicated rate schedule, the same shall be considered as 2% of basic price and adjusted with the total quoted price against each item keeping the total quoted price unaltered.

VOLUME-III
PRICE SCHEDULE, REV-00

JOB: Receipt, unloading, storage,Material Handling, Dismantling, material movement,New Material Erection, Re-Erection of Old Items, Modification of existing Items, Restoration, Commissioning, Testing & PG Test etc.of Combustion modification system for Nox mitigation of DVC Raghunathpur TPS(2x600 MW) U#1,2, PURULIA,West bengal.

TENDER NO PSER:SCT:RGN-S2098:21

SCH-1 -TOTAL PRICE Raghunathpur TPS(2x600MW) U#1&2.

SL. NO.	DESCRIPTION OF EQUIPMENT/ ITEM	PRICE SCHEDULE REF	TOTAL PRICE (INR) (IN FIGURE AND WORDS)
1.0	Total price for Receipt, Unloading, Storage of materials, Material Handling,Dismantling (certain areas as per site requirement/scope of work) & Upkeepment of materials for re-use/re-erection/modification of Mechanical,Electrical & C&I system, supply & application of paints, handling/transportation of equipments / materials from storage yard to site, pre-assembly, erection,cable laying, cable termination,cable glanding, testing, commissioning of new materials, re-erection/re-use/modification/commissioning of old dismatled items ,handing over & PG Test etc. of total Mechanical, Electrical and C&I system for Combustion modification system for Nox mitigation at DVC Raghunathpur TPS(2x600mw) U#1,2 as detailed in the tender document.	SCH 2 - BREAK UP OF TOTAL PRICE	

NOTE:-

- i. Bidder shall quote total price for total price of SCH-1- Part only at SI No. 1 above. All other amounts / rates of each item of works in respective schedules / parts will be derived based on allocated percentages. As such, any uncalled figure/ amount noted at any other place / schedule of Volume-III will not be reckoned & will stand null & void. Price for each unit will be derived as total quoted price for TWO UNIT OF BOILER / 2. Payment shall be realised unitwise on completion milestone scheduleof each unit mentioned in TCC.
- ii. Bidder to note that total price at SI No. 1 above shall be considered for evaluation & awarding. As such grand total price should be complete in all respect for the full scope defined and considering all terms and conditions.
- iii. Based on the itemwise percentage allocations, the amount for the individual items of the Bill of Quantity shall be arrived at. The rates of individual items shall be derived from the amount against each items after roundeding off .
- iv. Price format shall not be changed by bidder in any case and it may lead to cancellation of their offer.

PAGE 2 OF 3

VOLUME-III,

TENDER NO PSER:SCT:RGN-S2098:21

PRICE SCHEDULE, REV-00

SIGNATURE WITH SEAL OF BIDDER

VOLUME-III
PRICE SCHEDULE, REV-0

JOB: Receipt, unloading, storage,Material Handling, Dismantling, material movement,New Material Erection, Re-Erection of Old Items, Modification of existing Items, Restoration, Commissioning, Testing & PG Test etc.of Combustion modification system for Nox mitigation of DVC Raghunathpur TPS(2x600 MW) U#1,2, PURULIA,West bengal.

TENDER NO PSER:SCT:RGN-S2098:21

SCH-2 - BREAK UP OF TOTAL PRICE Raghunathpur TPS (2x600 MW) U# 1 & 2.

SL. NO.	DESCRIPTION OF EQUIPMENT/ ITEM	Quantity For TWO Units	Weightage for total price of each item on total price
A	Dismantling of Boiler items as per scope of work & Re-Erection/re-use/modification, alignment, welding & commissioning etc.of old dismantled items (for details, refer annexure-I & scope of work of TCC) a.1 Approx weight to be dismantled: 60 MT/Unit x2=120 MT a.2 Approx weight of Old dismantled Items to be retained/re-erected, rectified,aligned, welded, commissioned is 40 MTX2=80 MT. For details, Refer annexure-I & scope of work of TCC. Note: Qunatity for Dismantling work & old dismantled items to be re-erected/re-used/modified, commissioned may vary to any extent. No extra paymnet shall be made for quantity variation for a.1 & a.2 mentioned above.	1 lot	0.13509099
B	Erection of new items: Approx weight of new items to be erected, aligned, commissioned including shifting of material from store/yard to site, Erection & arrangement of Scaffloding etc. for Boiler: 252.484 MT(Pr Parts:7.667+Insulation:47.585+Non Pr Parts:197.232)/Unit x2= 504.968 MT. For details,Refer annex-II & scope of work of TCC. Note: Payment shall be made on proarata basis as per acutal qunatity.	504.968 MT	0.7625195
C	C&I & Electrical work: For details,refer Annex-III & scope of work of TCC. Note: Quantity & Size of C&I & Electrical Works/Items may vary to any aextent. No extra paymnet shall be made for quantity/size variation.	1 Lot	0.04816569
D.1	Material Handling work for 265 MT/UnitX2=530 MT(for details, refer Annex-IV & scope of work of TCC). Payment shall be made on proarata basis as per acutal qunatity.	530 MT	0.05339431
D.2	Approx weight of existing/old materials shifting/re stacking inside cover store/semi covered store/material yard is 10 MT/Unit (for details,refer Annex IV & scope of work of TCC). Payment shall be made on proarata basis as per acutal qunatity.	20 MT	0.00082951
	TOTAL		1.00000000