


UNSPECIFIED RADIUS = 4mm
WT. APPROX. = 8.4 Kg.

1. CASTING SHOULD BE SOUND AND FREE FROM DEFECTS SUCH AS SHRINKAGE, CRACKS, POROSITY ETC.
2. CASTING SHOULD BE REASONABLY SMOOTH AND ROUGH SPOT SHOULD BE DRESSED BY GRINDING
3. ALL CORNERS TO HAVE 5 RADIUS UNLESS OTHERWISE SPECIFIED.
4. EACH MOUNTING PLATE SHALL BE CLEANED & PACKED IN POLYETHYLENE/ POLYESTER BAG SO THAT THEY ARE NOT DAMAGED IN TRANSIT AND KEPT CLEAN DURING STORAGE.

FINISH :- NATURAL

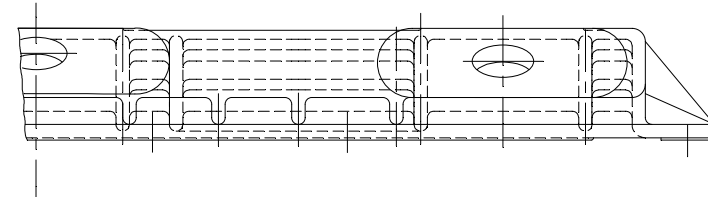

MOUNTING PLATE

ST943200		001		AL. ALLOY LM 6M SAND CASTING						AA19950		8.4			
VARNO		REMARKS		DESCRIPTION		DRAWING NO.		INSTR.		MATH. CIDE		UNIT WT.		QTY.	
CARD TYPE-2		CARD TYPE-1		CARD TYPE-1		CARD TYPE-2		CARD TYPE-2		CARD TYPE-2		CARD TYPE-2		CARD TYPE-2	
ADDITIONAL INFORMATION						V.C.B.									
STATUS OF DRAWING						mārikn dī -dkj : k sk- gokh fskuk d uke sk- gokh fskuk d uke NAME OF CUSTOMER/PROJECT									
DISTRIBUTION OF PRINTS						HAKY gosh byedvdiit fye/fen									
O.C. -1 SWM -3						BPHAR HEAVY ELECTRICALS LTD. BPHAL									
TCX -1						TSE Sd/-						2312.82			
						M/ZG Sd/-						2312.82			
						BPN/RKG Sd/-						81.83			
REV. DATE		ALTERED		BY		DATE		BY		DATE		BY		DATE	
56/-		56/-		56/-		56/-		56/-		56/-		56/-		56/-	
101.8.23		101.8.23		101.8.23		101.8.23		101.8.23		101.8.23		101.8.23		101.8.23	
TOOL NO. 149873 AND 149874						MOUNTING PLATE									
ADDED, NOTE-1 TO 3 ADDED.						0 521 10 01503									