

10082516372 .ON .GRD

2

3

4

5

6


7

8

STYLE LIST		
VAR.NO.	DESCRIPTION	ST.NO.
00	MULTIPLE BONDED SANDWICH MOUNTING	BP9094716951

SPECIFICATION.

SYNTHETIC RUBBER COATING		CHLOROPRENE RUBBER PAINT COATED TWICE
THICKNESS		175±1.8 MM
SPRING CONSTANT <COMPRESSION>		5 (4600 KGF)-5(2800 KGF) =7.9±0.8MM
TENSILE TEST	TENSION ELONGATION.	MINIMUM. 150KGF/CM <sup>2</sup> MINIMUM. 400%.
PERMANENT SET, <25% COMPRESSION>		MAXIMUM 25%.
ALLOWABLE SHEARING STRAIN.		MAXIMUM 20%.

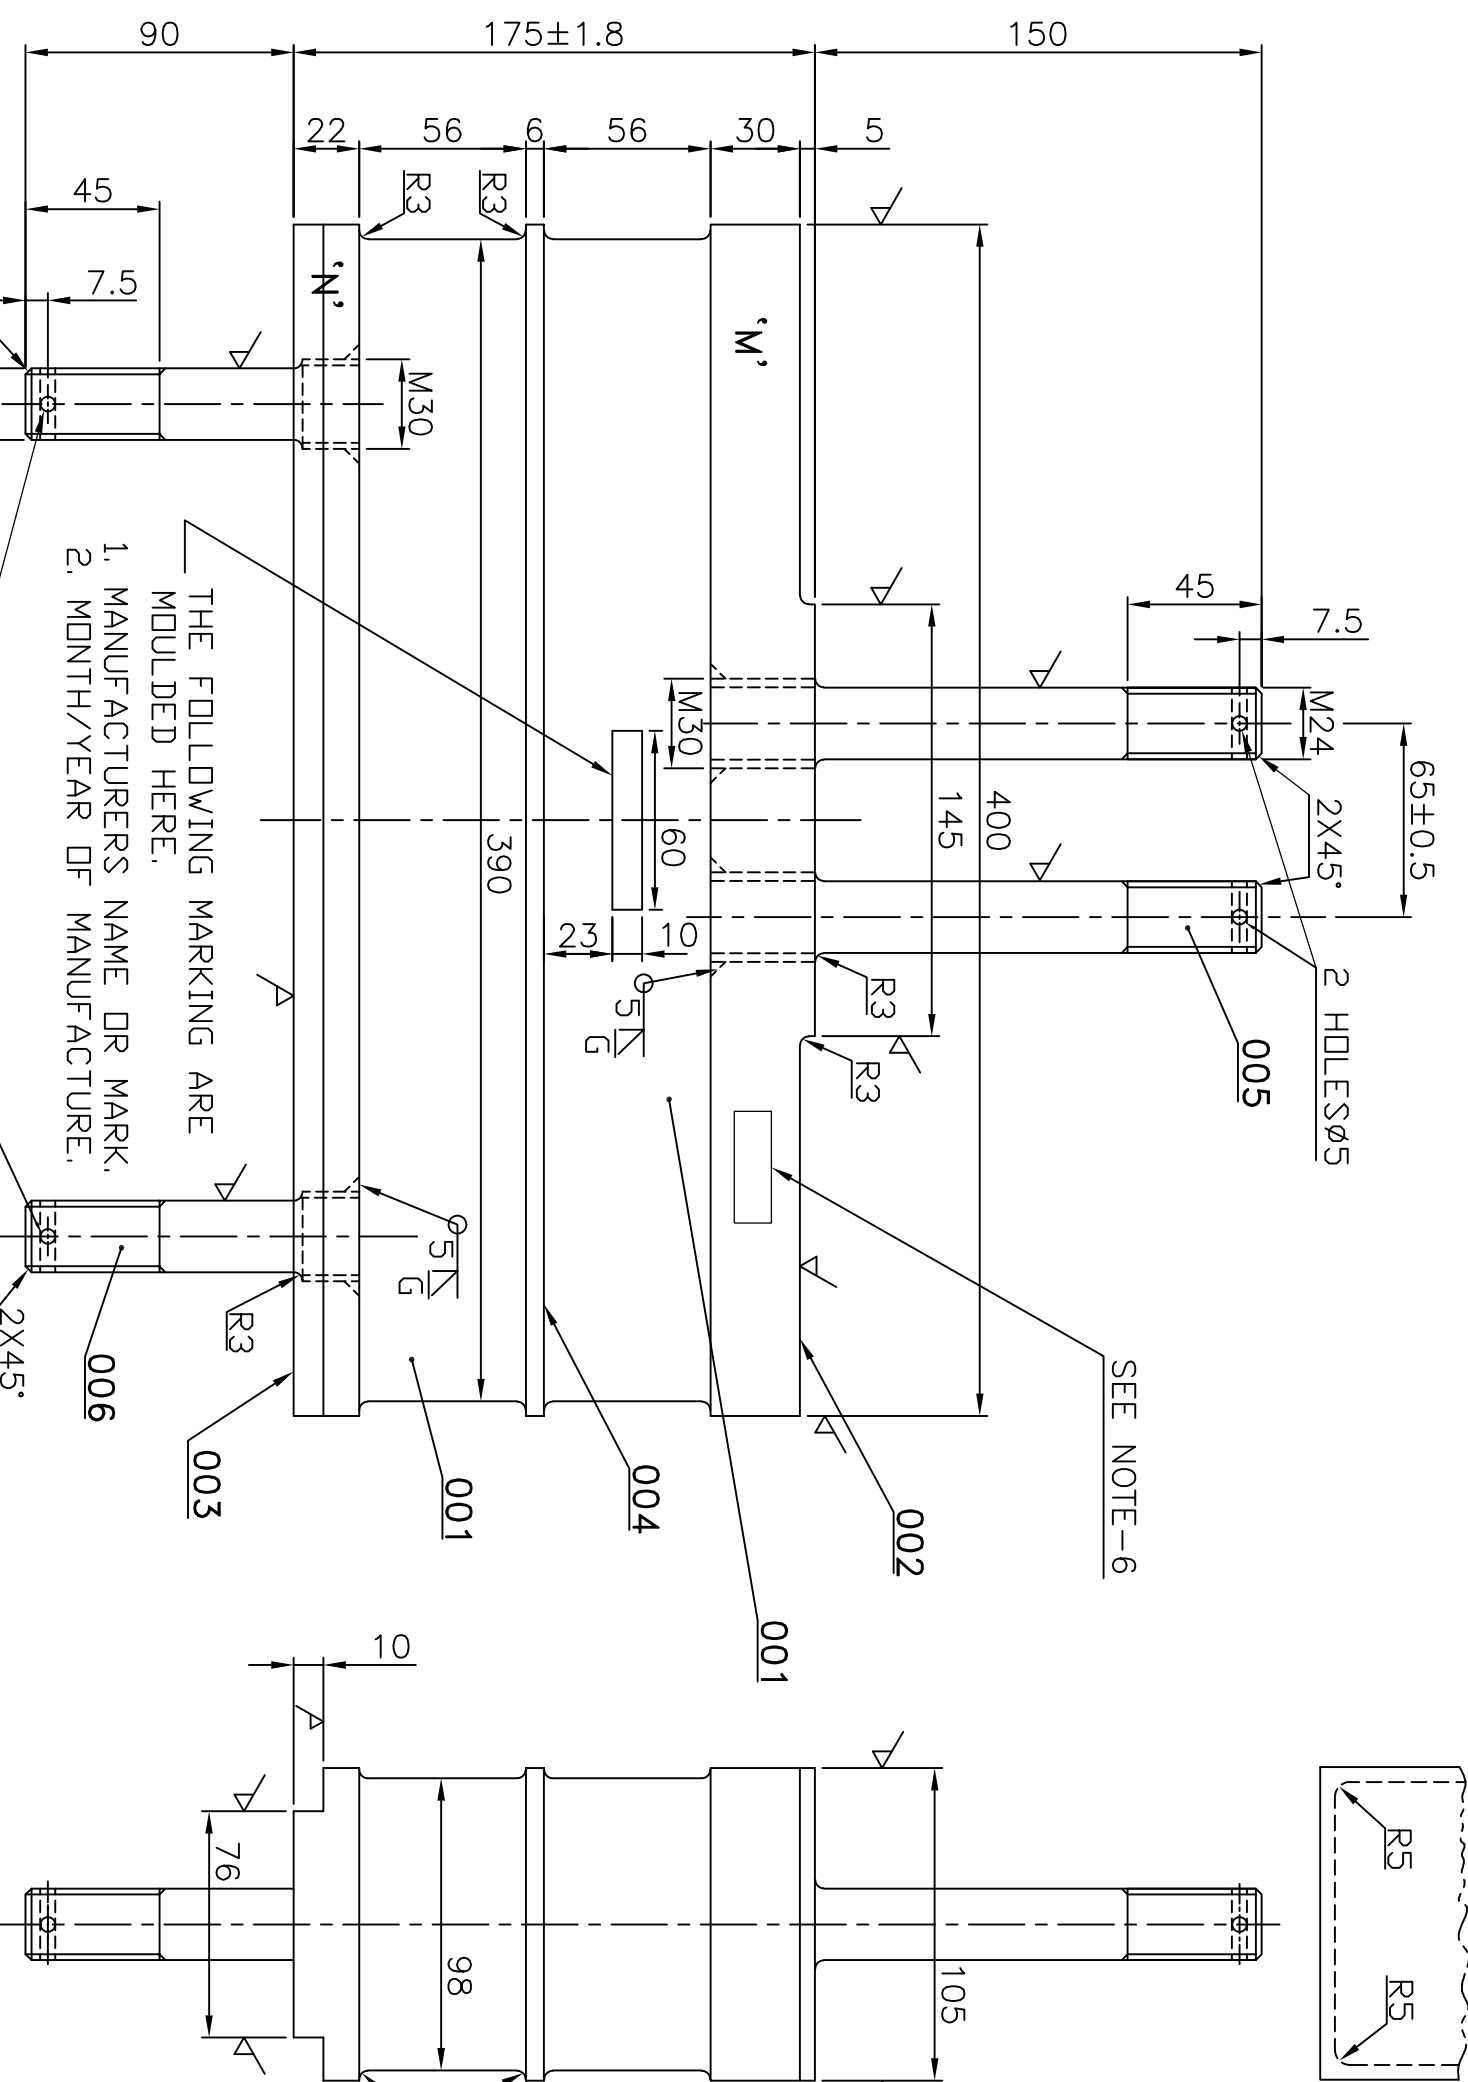

- NOTES:-
- VARIATION OF TOLERANCE = 175±1.8 MM (MEAN) (175±0.9 MM)
  - IT. 001 TO 004 TO BE BONDED TOGETHER.
  - BOND/SHEAR TEST:- CLAMP STEEL END PLATE 'N' IN A FIXTURE VERTICALLY. APPLY VERTICAL LOAD ON THE TOP 'M'. DEFLECT THE MOUNTING LATERALLY BY 70 MM THREE TIMES AT ROOM TEMPERATURE. RUBBER DAMPER SHOULD NOT SHOW PEELING OFF OR ANY OTHER DEFECT AND NO FAILURE OF BOND SHOULD BE VISIBLE.
  - APPLY RUST PREVENTIVE ON SPECIAL BOLTS, IT. 005 & 006. ALSO PROTECT THESE ITEMS WITH A SUITABLE PLASTIC SLEEVE TO AVOID DAMAGE OF THREADS DURING TRANSPORT.
  - PAINTING COLOR: BLACK
  - 'TM4303' TO BE PUNCHED AT THE LOCATION SHOWN

VAR. NO.	ITEM NO.	DESCRIPTION	DRAWING NO.	UNIT	WT.	QTY.	ZONE
002	006	SPL. BOLT, Ø40x112		KG	0.5		
002	005	SPL. BOLT, Ø40x185		KG	0.9		
001	004	INSERT, 6TK.x105x 400		KG	2.0		
001	003	END PLATE, 22TK.x 105x400		KG	7.78		
001	002	END PLATE, 36TK.x 105x400		KG	12.7		
002	001	RUBBER, 56TK.x105x 390		KG	1.2		
59	64	75	78	79	25	27	29
VAR. 00	REMARKS	VAR. NO.	VAR. ITEM NO.	DESCRIPTION	DRAWING NO.	UNIT	WT.
59	64	75	78	79	25	27	29
VAR. 00	REMARKS	VAR. NO.	VAR. ITEM NO.	DESCRIPTION	DRAWING NO.	UNIT	WT.

28 - CARD TYPE-3

28 - CARD TYPE-1

28 - CARD TYPE-2

ADDITIONAL INFORMATION

TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT

TM4303 AZ,BY,DY 25KV. BG. AC. EMU.

STATUS OF DRAWING

DISTRIBUTION OF PRINTS

TME-1 TXM-3 TNX-1

VIEW FOR BOND/SHEAR TEST UPDATED.

NOTE 1 TO 5 ADDED & VIEW FOR BOND/SHEAR TEST UPDATED.

NOTE-6 ADDED.

IN ITS 005 & 006 2 HOLES Ø5 VIEW CORRECTED.

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3

NOTE-6

SEE NOTE-6

NOTE-3

SEE NOTE-3



# CORPORATE PURCHASING SPECIFICATION

AA10501

Rev No. 14

PAGE 1 of 4

## 1.5% NICKEL-CHROMIUM-MOLYBDENUM HOT ROLLED/FORGED STEEL BARS- H & T

### 1.0 GENERAL:

This specification governs the quality requirements of 1.5% Nickel-Chromium-Molybdenum Hot rolled/forged Steel Bars, Gr: 40Ni6Cr4Mo3 in Hardened and Tempered condition.

### 2.0 APPLICATION:

For the manufacture of bolts, studs and various components of machines.

### 3.0 CONDITION OF DELIVERY:

Hot Rolled / Forged; Hardened and tempered.

**Note:** Sizes up to 100mm in hot rolled  
>100 to 180mm in hot rolled or forged  
above 180mm in forged

The ends of bars shall be reasonably square and true.

The bars shall be supplied in straight lengths without twists and bends.

### 4.0 COMPILANCE WITH NATIONAL STANDARDS:

The material shall comply with the requirements of the following National standard and also meet the requirements of this specification.

IS: 5517 – 1993 Gr: 40Ni6Cr4Mo3, Type: J  
Hardened & Tempered

Steels for Hardening and Tempering -  
Specification

### 5.0 DIMENSIONS AND TOLERANCES:

#### 5.1 Sizes: Bars shall be supplied to the dimensions specified on the order.

##### 5.1.1 Length: Unless otherwise specified, hot rolled bars shall be supplied in 3 to 6 metres length or in multiples with maximum 10%, shorts down to 1 metre.

Forged bars shall be supplied in lengths of 1.5 to 3.0 metres

#### Revisions:

Revised as per email dt 18.12.08 from Shri Gopal Bhatt from Bhopal.

#### APPROVED:

INTERPLANT MATERIAL RATIONALISATION  
COMMITTEE – MRC(S&GPS)

Rev No.14

Amd No.

Reaffirmed

Prepared

Issued

Dt. of 1<sup>st</sup> Issue

Dt:18-12-2008

Dt:

Year:2020

6 HEP, Bhopal

Corp.R&amp;D

April, 1977

AA10501

Rev No. 14

PAGE 2 of 4

# CORPORATE PURCHASING SPECIFICATION



## 5.2 Tolerance:

**5.2.1 Hot rolled bars:** The bars shall not vary from specified diameter or distance across flats by more than  $\pm 2\frac{1}{2}$  %.

**5.2.2 Forged bars:** The tolerance on the forged bars shall be as follows.

<u>Diameter, mm</u>	<u>Tolerance, mm</u>
50 mm to 175 mm	+ 8.0 mm
Above 175 mm	+ 12.5 mm

**Note:** (Hot rolled & forged bars).

Insignificant surface defects in the form of dent and ripple marks are permissible provided their depth does not exceed half the tolerance on each size.

## 6.0 MANUFACTURE:

Material shall be manufactured from fully killed steel.

## 7.0 HEAT TREATMENT:

The recommended heat treatment is as follows:

Harden in oil / water from a temperature of 830 – 850°C.

Temper at a suitable temperature between 550 – 660°C.


## 8.0 FREEDOM FROM DEFECTS:

The bars shall be sound, straight and free from internal and surface defects, such as seams, laps, cracks or any other defects which may impair the end use.

## 9.0 CHEMICAL COMPOSITION:

The melt analysis of steel and the permissible variation in the composition of the finished product from the melt analysis shall be follows:

Element	Melt analysis percent		Permissible variation, percent, in product analysis
	Min.	Max.	
Carbon	0.35	0.45	$\pm 0.02$
Silicon	0.10	0.35	$\pm 0.03$
Manganese	0.40	0.70	$\pm 0.04$
Nickel	1.25	1.75	$\pm 0.05$
Chromium	0.90	1.30	$\pm 0.05$
Molybdenum	0.20	0.35	$\pm 0.03$
Sulphur	---	0.035	+ 0.005
Phosphorus	---	0.035	+ 0.005

	<h1 style="margin: 0;">CORPORATE PURCHASING SPECIFICATION</h1>	AA10501 Rev No.14 PAGE 3 of 4
---	--	-------------------------------------

**10.0 TEST SAMPLES:**

**10.1** One sample shall be taken from each melt for chemical analysis.

**10.2** One sample shall be taken from each heat treatment batch for testing of mechanical properties. Test pieces for mechanical tests shall be taken in the longitudinal direction of the piece.

For ruling section up to & including 40mm, the test piece shall be machined coaxially from the test bars. For ruling section above 40mm the longitudinal axis shall be at least 12.5 mm from surface of the test bars.

Test methods for determining mechanical properties shall be as per IS: 1598 (For IZOD impact test)/IS: 1757 (For impact test in ISO-V Charpy) and IS: 1608 (For tensile test) or any other reputed International Standard.

**10.3** For ruling section above 200mm, tensile test samples can be taken in tangential or transverse direction.

**11.0 MECHANICAL PROPERTIES (In Hardened and Tempered Condition):**

Ruling section, mm	Tensile strength, N/mm <sup>2</sup>	0.2%/PS/YS N/mm <sup>2</sup> min	%E $5.65\sqrt{S_0}$ min	* IZOD impact J, min	Hardness ** BHN
up to 30	1200, min	1000	10	30 (25)	360 – 420
> 30 to = 63	1100 – 1250	880	11	41 (35)	330 – 390
> 63 to = 100	1000 – 1150	800	13	48 (42)	300 – 350
>100 to = 150	900 – 1050	700	15	55 (50)	270 – 300
>150	800 – 950	600	16	55 (50)	240 – 285

\* Average of 3 samples applicable for sizes above 16 mm ruling section only. Values in bracket are in ISO - V Charpy.

\*\* Hardness shall be reported for information only.

**12.0 ULTRASONIC TEST:**

**12.1** Each bar above 100 mm shall be tested ultrasonically in accordance with BHEL standard AA0850118 to ensure freedom from internal defects.

The norms of acceptance shall be as per category 2 of the above standard.

**12.2 Optional tests:** If specified on order, each bar > 40 to 100 mm shall be tested ultrasonically in accordance with BHEL standard AA0850118 to ensure freedom from internal defects and the norms of acceptance shall be as per category 2.

AA10501	<div style="text-align: center;"> <b>CORPORATE PURCHASING SPECIFICATION</b> </div>	
Rev No. 14		
PAGE 4 of 4		

### 13.0 TEST CERTIFICATES:

Three copies of test certificates shall be supplied, unless otherwise stated on the order. In addition, the supplier shall ensure to enclose one copy of the test certificate along with their dispatch documents to facilitate quick clearance of the material.

The test certificate shall bear the following information:

**BHEL References:**

AA10501, Rev.No.14: 1.5% Nickel-Chromium-Molybdenum Hot Rolled/Forged Steel Bars- H&T  
BHEL order No,

**Supplier's References:**

Name:

Identification No:

Melt No:

Details of heat treatment:

**Result of Tests:**

Dimensional inspection.

Results of chemical analysis, mechanical and & Ultrasonic tests.

### 14.0 PACKING AND MARKING

The bars shall be suitably packed in bundles to prevent corrosion and damage during transit.

Each bar equal to or greater than 50 mm in diameter or of equivalent cross sectional area shall be stamped with 'AA10501' and melt number on the side near the end or on the face.

Bars below 50 mm shall be bundled together and tied with wire at 3 to 4 places along the length of the bars.

A metal label shall be securely attached to each bundle and shall bear the following information:

AA10501: 1.5% Nickel-Chromium-Molybdenum Hot Rolled/Forged Steel Bars- H & T.

BHEL Order No.:

Consignment/Identification No.:

Melt No.:

Size and Weight:

Supplier's Name:

### 15.0 REFERRED STANDARDS (Latest Publications Including Amendments):


1. IS: 1598


2. IS: 1608

3. IS: 1757

4. IS: 5517

5. AA0850118

	<h1 style="margin: 0;">CORPORATE PURCHASING SPECIFICATION</h1>	<div style="border-bottom: 1px solid black; padding: 2px;">AA10108</div> <div style="border-bottom: 1px solid black; padding: 2px;">Rev No. 11</div> <div style="padding: 2px;">PAGE 1 of 2</div>			
<h2 style="margin: 0;">STRUCTURAL STEEL-STANDARD QUALITY</h2> <h3 style="margin: 0;">(PLATES, SECTIONS, STRIPS, FLATS &amp; BARS)</h3> <h3 style="margin: 0;">(ORDERING DESCRIPTION)</h3>					
<p><b>1.0 GENERAL:</b></p> <p>This specification governs the quality requirements of structural steel plates, strips, flats, bars and sections such as angles, beams, channels and tees etc. of IS: 2062 – 2011, Gr: E250, Quality A</p> <p><b>2.0 APPLICATION:</b></p> <p>For general engineering purpose.</p> <p><b>3.0 CONDITION OF DELIVERY:</b></p> <p>Plates, Bars &amp; Sections: Hot rolled in straight lengths without twists &amp; Bends</p> <p><b>4.0 COMPLIANCE WITH NATIONAL STANDARDS:</b></p> <p>Material shall comply with the requirements of IS: 2062 – 2011, Gr: E250, Quality A</p> <p>Material offered to EN 10025-2:2004 Gr. S275JR is also acceptable. The tolerance on dimensions for plates shall comply with EN 10029.</p> <p><b>5.0 DIMENSIONS AND TOLERANCES:</b></p> <p><b>5.1 DIMENSIONS:</b></p> <p><b>5.1.1 Sizes</b></p> <p>Material shall be supplied to the dimensions specified on BHEL Order.</p> <p><b>5.1.2 Length</b></p> <p>Unless otherwise specified, hot rolled bars and sections shall be supplied in 3 to 6 metres length.</p> <p><b>5.2 Tolerances:</b></p> <p><b>5.2.1</b> The tolerances on hot rolled material shall comply with IS: 1852. However, no plate shall be under the specified thickness at any point.</p>					
Revisions: As per Cl. No. 38.1 of MOM of MRC-S&GPS		<b>APPROVED:</b> INTERPLANT MATERIAL RATIONALISATION COMMITTEE – MRC(S&GPS)			
Rev No.11	Amd No.	Reaffirmed	Prepared	Issued	Dt. of 1 <sup>st</sup> Issue
Dt:22-02-2014	Dt:	Year:	10/05/2026 HEPEP, Hyderabad	Corp.R&D	July, 1976

AA10108	<b>CORPORATE PURCHASING SPECIFICATION</b>	
Rev No. 11		
PAGE 2 of 2		

**5.2.2 Straight for hot rolled bars:**

Unless otherwise specified, the permissible deviation in straightness shall not exceed 5 mm in any 1000 mm length.

**6.0 HARDNESS (BRINELL):**

When tested in accordance with IS: 1500, the material shall show a brinell hardness in the range of 120-156 HB.

Note: Hardness test shall be conducted only when tensile test cannot be performed.

**7.0 TEST CERTIFICATES:**

Unless otherwise specified, three copies of test certificates shall be supplied.

In addition, the supplier shall ensure to enclose one copy of the test certificate along with their dispatch documents to facilitate quick clearance of the material.

The test certificate shall bear the following information.

AA10108 Rev.11 / IS:2062 Grade: E250 Quality A / EN 10025-2 Gr. S275JR,

BHEL order no., Melt no. Size, Results of chemical analysis and Mechanical tests, Supplier's name, Identification no. TC no., Signature of competent authority etc.

**8.0 PACKING AND MARKING:**

Plates shall be transported suitably to avoid damage during transit.

For plates below 10 mm thick, each pile (preferably of 16 plates) and each plate 10 mm thick & over shall be marked with melt no. AA10108, BHEL order no., Supplier's name, Identification no., Size & weight on any one corner and encircled with paint preferably of white colour.

**9.0 REFERRED STANDARDS (Latest publications including amendments):**

1) IS: 1500                      2) IS: 1852                      3) EN 10029