


FIRST ANGLE PROJECTION

(ALL DIMENSIONS ARE IN mm)

DRG. NO.	3	430	20	76	201
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					
51					
52					
53					
54					
55					
56					
57					
58					
59					
60					
61					
62					
63					
64					
65					
66					
67					
68					
69					
70					
71					
72					
73					
74					
75					
76					
77					
78					
79					
80					
81					
82					
83					
84					
85					
86					
87					
88					
89					
90					
91					
92					
93					
94					
95					
96					
97					
98					
99					
100					

THE INFORMATION ON THIS DOCUMENT IS THE PROPERTY OF BHARAT HEAVY ELECTRICALS LIMITED. IT MUST NOT BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO THE INTEREST OF THE COMPANY

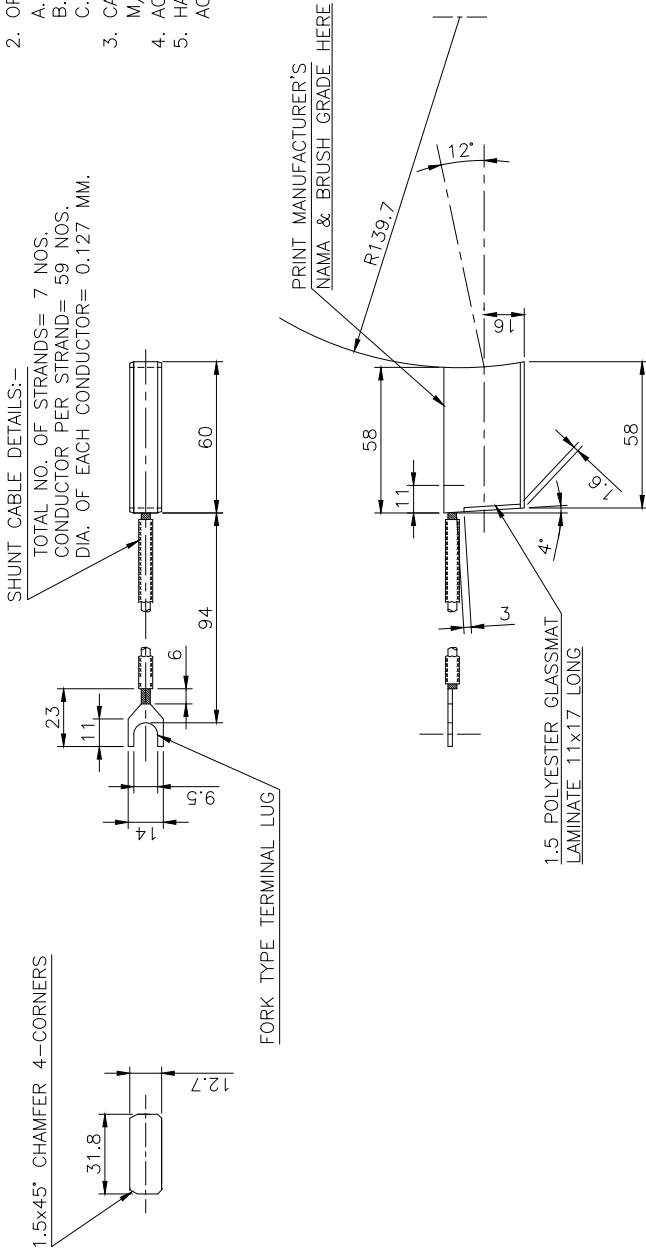

NOTES:—

1. BRUSH MUST BE CODE DATED AS PER NEMA STANDARDS.
2. OPERATING CONDITIONS:
 - A. CURRENT DENSITY OF BRUSH:15 AMP./CM.²
 - B. PERIPHERAL SPEED:13.2 M/Sec.
 - C. CARBON BRUSH SHOULD BE OF METAL GRAPHITE.
3. CARBON BRUSH GRADE SHALL BE MC80Z3 OF M/S MERSEN INDIA OR M15E OF M/S ASSAM CARBON.
4. ACCEPTANCE TEST TO BE DONE AS PER CLAUSE 16.2 OF IS:13466.
5. HARDNESS TEST SHALL BE AS PER CLAUSE 7.2 OF SPEC. IS:13584. ACCEPTABLE VALUE OF HARDNESS IS 10 SHORE (NOMINAL).

[illegible][illegible]