

BHARAT HEAVY ELECTRICALS LIMITED, BHOPAL

TRANSFORMER ENGINEERING DEPARTMENT

FORM NO: TRE-2003A

Sht 1 of 1 sheets



ANNEXURE TO INDENT-CUM-ENQUIRY	: 240634102	DTD.:
DESCRIPTION OF EQUIPMENT	: DIFFERENTIAL PRESSURE GAUGE FOR 200 MVA, 400 KV, 1-PH, GENERATOR TRANSFORMER	
WORK ORDER NO.	: 62203-A-512-01	
CUSTOMER	: M/S CSPGCL, Chandrapur	

SPECIFICATION OF DIFFERENTIAL PRESSURE GAUGE

1. The differential pressure gauge shall generally conform to BHEL standard specification TR-20052P Rev.06 (Available with supplier).
2. QUANTITY: As specified in indent.

NOTES: -

- a. Drawing showing mounting details, description, leaflets and test reports (including type tests) should be furnished with the offer for approval.
- b. Bidder to furnish QAP for approval.

REV	DATE	ALT CKD	REV	DATE	ALT CKD	REV 00	NAME	SIGN	DATE
						PREP	KAMLESH		8/7/23
						CKD	PAWAN		8/7/23
DWI/TCB/TRE/010									

1713008/20052P TRE40607



Form No. 2038

उत्पाद मानक

परिणामित्र

शाप/आ.का.निर्देश

PRODUCT STANDARD TRANSFORMER

SHOP / DO. INSTRUCTION

TR20052P

2 पृष्ठों में 1

PAGE 1 OF 2



REF. TR20052 P - 205

Comp. drg.


COPYRIGHT AND CONFIDENTIAL

The Information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED. It must not be used directly or indirectly in any way detrimental to the interest of the Company.

शीर्षक TITLE: DIFFERENTIAL PRESSURE GAUGE (ST604787)

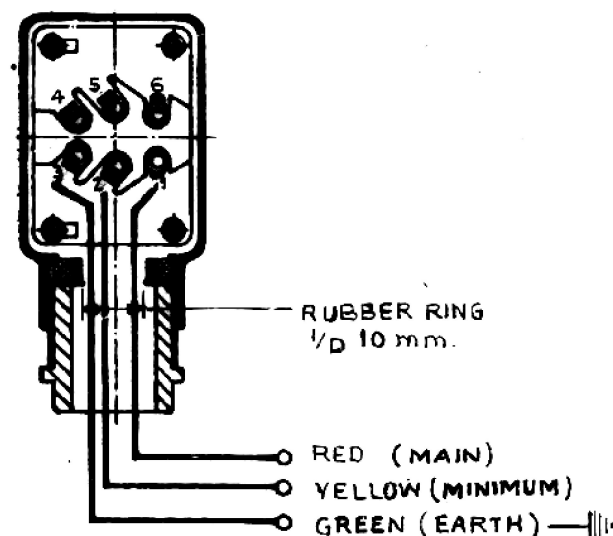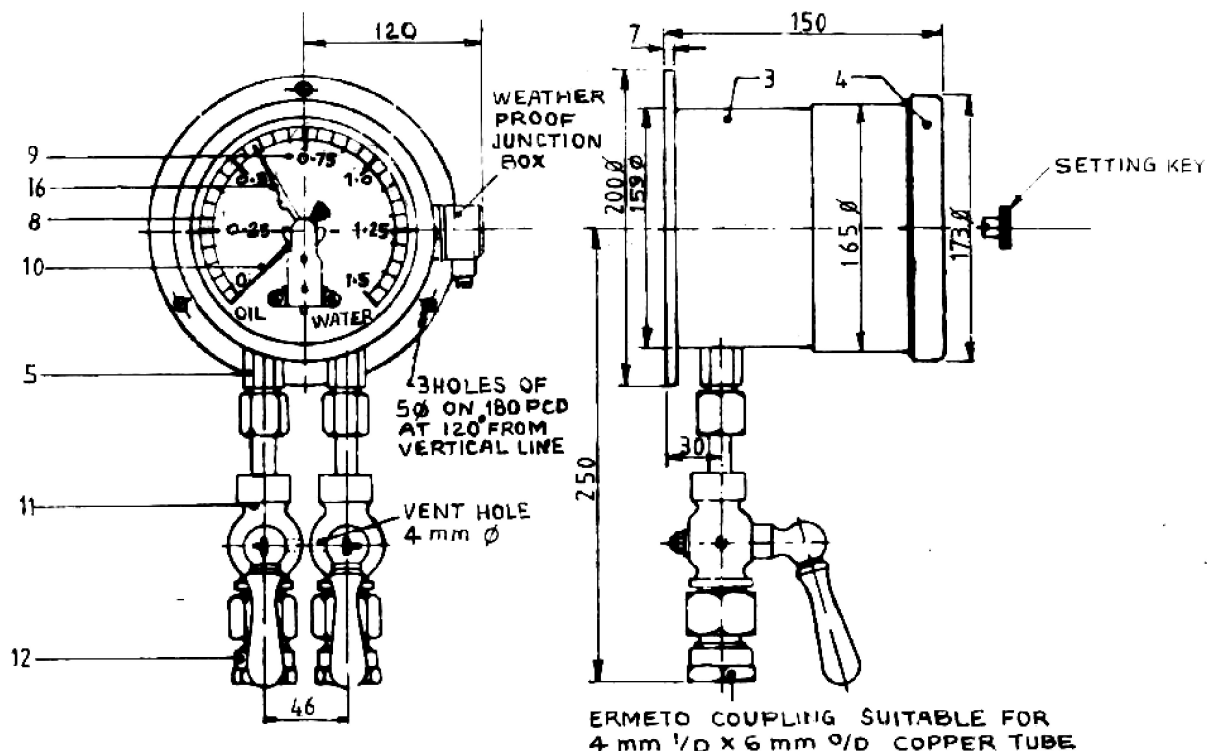

WIRING CONNECTION OF WEATHER PROOF
JUNCTION BOX.

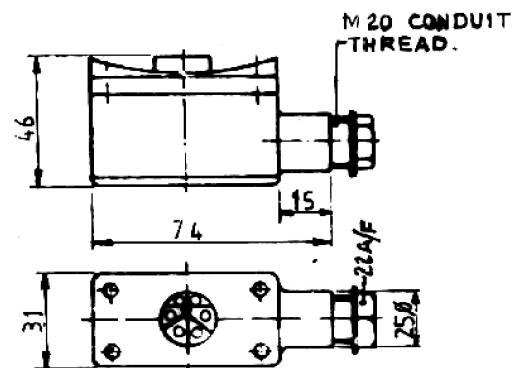

WEATHER-PROOF JUNCTION BOX.

TR20052P

PAGE 1 OF 2

पुनःRev.
06
दि. Dt.
02/07/20

SHEET REAFFIRMED & DIGITIZED.

Rashmi Nitin NKM

पुनःRev.
05
दि. Dt.
14/01/13

SHEET REAFFIRMED.

AKD

वितरण

DISTRIBUTION.

TRE/TRM/FBM
TCX(TR)/TTX/
TTG/QC/QA/
TSD/JHANSI


सं

स्वीकृत किया : S.N.A.
APPROVED :

तैयार किया PREPD.
A.K.SINHA ROY.

जारी किया ISSUED
टीआरई/मानक TRE/STD.

दिनांक DATE
1.3.87

1713008/20052 REF. TR20052 P - 205 Comp. drg.	 Form No. 2038	उत्पाद मानक परिणामित्र शाप/आ.का.निर्देश PRODUCT STANDARD TRANSFORMER SHOP / DO. INSTRUCTION	TR20052P 2 पृष्ठों में 2 PAGE 2 OF 2																																																																						
शीर्षक TITLE: DIFFERENTIAL PRESSURE GAUGE (ST604787)																																																																									
<table border="0"> <tr> <td>1. APPLICATION</td> <td>:</td> <td>OUTDOOR SUITABLE FOR INDICATING DIFFERENCE OF TRANSFORMER OIL AND WATER CIRCUIT PRESSURE. MAX. WORKING PRESSURE 2 Kg/cm²</td> </tr> <tr> <td>2. SIZE</td> <td>:</td> <td>150 mm. (DIAL SIZE)</td> </tr> <tr> <td>3. CASE</td> <td>:</td> <td>CAST ALUMINIUM</td> </tr> <tr> <td>4. BAZEL</td> <td>:</td> <td>CAST ALUMINIUM</td> </tr> <tr> <td>5. SOCKET</td> <td>:</td> <td>BRASS</td> </tr> <tr> <td>6. MOVEMENT</td> <td>:</td> <td>BRASS</td> </tr> <tr> <td>7. BOURDON TUBE</td> <td>:</td> <td>P. BRONZE</td> </tr> <tr> <td>8. DIAL</td> <td>:</td> <td>ANODISED ALUMINIUM OF 150 mm DIA WITH WHITE BACKGROUND AND BLACK MARKING, GRADUATED FROM 0-1.5 Kg/cm² DIFFERENTIAL PRESSURE SPREADOVER TO 270° WITH MINIMUM READABLE PRESSURE OF 0.05 Kg/cm² DIAL TO BE MARKED 'DIFFERENTIAL PRESSURE AND ALSO 'OIL' AND 'WATER' FOR HP AND LP CONNECTION.</td> </tr> <tr> <td>9. WINDOW</td> <td>:</td> <td>ACRYLIC</td> </tr> <tr> <td>10. POINTER</td> <td>:</td> <td>SPRING STEEL</td> </tr> <tr> <td>11. COCKS</td> <td>:</td> <td>G.M.</td> </tr> <tr> <td>12. ERMETO COUPLING</td> <td>:</td> <td>BRASS.</td> </tr> <tr> <td>13. MOUNTING</td> <td>:</td> <td>SURFACE</td> </tr> <tr> <td>14. CONNECTION</td> <td>:</td> <td>BOTTOM</td> </tr> <tr> <td>15. ACCURACY</td> <td>:</td> <td>± 1% OF F.S.D.</td> </tr> <tr> <td>16. CONTACT</td> <td>:</td> <td>SINGLE ELECTRIC CONTACT.</td> </tr> <tr> <td>17. CONTACT ARRGT.</td> <td>:</td> <td>NORMALLY OPEN AND CLOSE ON FALLING DIFFERENTIAL PRESSURE WHEN OIL PRESSURE DOES NOT EXCEED WATER PRESSURE BY 0.15 kg/cm²</td> </tr> <tr> <td>18. SINGLE SCALE</td> <td>:</td> <td>0 - 1.5 kg/cm²</td> </tr> <tr> <td>19. OVER RANGE -PROTECTION</td> <td>:</td> <td>110 % RANGE</td> </tr> <tr> <td>20. CONTACT RATING</td> <td>:</td> <td>(TO BE TESTED FOR 2 Kv)</td> </tr> <tr> <td> a) VOLTAGE</td> <td>:</td> <td>50 ≤ VOLTS 380 " AC / DC</td> </tr> <tr> <td> b) SWITCHING CAPACITY</td> <td>:</td> <td>18 VA / 10 WATTS FOR NON MAGNETIC. 50 VA / 30 WATTS FOR MAGNETIC.</td> </tr> <tr> <td> c) MAX. CURRENT</td> <td>:</td> <td>≤ 1 AMP.</td> </tr> </table>					1. APPLICATION	:	OUTDOOR SUITABLE FOR INDICATING DIFFERENCE OF TRANSFORMER OIL AND WATER CIRCUIT PRESSURE. MAX. WORKING PRESSURE 2 Kg/cm ²	2. SIZE	:	150 mm. (DIAL SIZE)	3. CASE	:	CAST ALUMINIUM	4. BAZEL	:	CAST ALUMINIUM	5. SOCKET	:	BRASS	6. MOVEMENT	:	BRASS	7. BOURDON TUBE	:	P. BRONZE	8. DIAL	:	ANODISED ALUMINIUM OF 150 mm DIA WITH WHITE BACKGROUND AND BLACK MARKING, GRADUATED FROM 0-1.5 Kg/cm ² DIFFERENTIAL PRESSURE SPREADOVER TO 270° WITH MINIMUM READABLE PRESSURE OF 0.05 Kg/cm ² DIAL TO BE MARKED 'DIFFERENTIAL PRESSURE AND ALSO 'OIL' AND 'WATER' FOR HP AND LP CONNECTION.	9. WINDOW	:	ACRYLIC	10. POINTER	:	SPRING STEEL	11. COCKS	:	G.M.	12. ERMETO COUPLING	:	BRASS.	13. MOUNTING	:	SURFACE	14. CONNECTION	:	BOTTOM	15. ACCURACY	:	± 1% OF F.S.D.	16. CONTACT	:	SINGLE ELECTRIC CONTACT.	17. CONTACT ARRGT.	:	NORMALLY OPEN AND CLOSE ON FALLING DIFFERENTIAL PRESSURE WHEN OIL PRESSURE DOES NOT EXCEED WATER PRESSURE BY 0.15 kg/cm ²	18. SINGLE SCALE	:	0 - 1.5 kg/cm ²	19. OVER RANGE -PROTECTION	:	110 % RANGE	20. CONTACT RATING	:	(TO BE TESTED FOR 2 Kv)	a) VOLTAGE	:	50 ≤ VOLTS 380 " AC / DC	b) SWITCHING CAPACITY	:	18 VA / 10 WATTS FOR NON MAGNETIC. 50 VA / 30 WATTS FOR MAGNETIC.	c) MAX. CURRENT	:	≤ 1 AMP.
1. APPLICATION	:	OUTDOOR SUITABLE FOR INDICATING DIFFERENCE OF TRANSFORMER OIL AND WATER CIRCUIT PRESSURE. MAX. WORKING PRESSURE 2 Kg/cm ²																																																																							
2. SIZE	:	150 mm. (DIAL SIZE)																																																																							
3. CASE	:	CAST ALUMINIUM																																																																							
4. BAZEL	:	CAST ALUMINIUM																																																																							
5. SOCKET	:	BRASS																																																																							
6. MOVEMENT	:	BRASS																																																																							
7. BOURDON TUBE	:	P. BRONZE																																																																							
8. DIAL	:	ANODISED ALUMINIUM OF 150 mm DIA WITH WHITE BACKGROUND AND BLACK MARKING, GRADUATED FROM 0-1.5 Kg/cm ² DIFFERENTIAL PRESSURE SPREADOVER TO 270° WITH MINIMUM READABLE PRESSURE OF 0.05 Kg/cm ² DIAL TO BE MARKED 'DIFFERENTIAL PRESSURE AND ALSO 'OIL' AND 'WATER' FOR HP AND LP CONNECTION.																																																																							
9. WINDOW	:	ACRYLIC																																																																							
10. POINTER	:	SPRING STEEL																																																																							
11. COCKS	:	G.M.																																																																							
12. ERMETO COUPLING	:	BRASS.																																																																							
13. MOUNTING	:	SURFACE																																																																							
14. CONNECTION	:	BOTTOM																																																																							
15. ACCURACY	:	± 1% OF F.S.D.																																																																							
16. CONTACT	:	SINGLE ELECTRIC CONTACT.																																																																							
17. CONTACT ARRGT.	:	NORMALLY OPEN AND CLOSE ON FALLING DIFFERENTIAL PRESSURE WHEN OIL PRESSURE DOES NOT EXCEED WATER PRESSURE BY 0.15 kg/cm ²																																																																							
18. SINGLE SCALE	:	0 - 1.5 kg/cm ²																																																																							
19. OVER RANGE -PROTECTION	:	110 % RANGE																																																																							
20. CONTACT RATING	:	(TO BE TESTED FOR 2 Kv)																																																																							
a) VOLTAGE	:	50 ≤ VOLTS 380 " AC / DC																																																																							
b) SWITCHING CAPACITY	:	18 VA / 10 WATTS FOR NON MAGNETIC. 50 VA / 30 WATTS FOR MAGNETIC.																																																																							
c) MAX. CURRENT	:	≤ 1 AMP.																																																																							
TESTING :- EACH GAUGE SHALL BE SERIAL NUMBERED AND TC ISSUED FOR THE FOLLOWING TESTS. i) CALIBRATION TEST RESULTS, CALIBRATION TO BE CHECKED FIRST BY PRESSURISING OIL SIDE AND THEN BOTH OIL AND WATER SIDE. ii) 2 kv TEST. iii) PRESSURE TEST ON COUPLINGS AND COCKS AT 2.5 kg/cm ² FOR 15 MINUTES. iv) SWITCH OPERATION TEST ON FALLING DIFFERENTIAL.																																																																									
TR20052P PAGE 2 OF 2	पुन:Rev. 06 दि. Dt. 02/07/20 RASHMI NITIN NKM SHEET REAFFIRMED.	वितरण DISTRIBUTION. TRE/TRM/FBM TCX(TR)/TTX/ TTG/QC/QA/ TSD/JHANSI	सं स्वीकृत किया : S.N.A. APPROVED : तैयार किया PREPD. जारी किया ISSUED दिनांक DATE A.K.SINHA ROY. टीआरई/मानक TRE/STD. 1.3.87																																																																						
	पुन:Rev. 05 दि. Dt. 14/01/13 AKD																																																																								