

## **Bharat Heavy Electricals Limited**

(High Pressure Boiler Plant)
Tiruchirappalli – 620014, TAMIL NADU, INDIA
CAPITAL EQUIPMENT / MATERIALS MANAGEMENT

#### **ENQUIRY**

Phone: +91 431 257 79 38

Fax : +91 431 252 07 19 Email : tvenkat@bheltry.co.in

Web : www.bhel.com

#### **NOTICE INVITING TENDER**

TWO PART BID

Enquiry Number:

Due date for submission of quotation:

2620900213 29.09.2009 05.11.2009

You are requested to quote the Enquiry number date and due date in all your correspondences. This is only a request for quotation and not an order

Please note that under any circumstances both **delayed offer** and **late offers** will not be considered. Hence vendors are requested to ensure that the offer is reaching physically our office before 14.00 hrs on the date of tender opening.

Item	Description	Quantity
10	<b>3 Ton Semi Gantry Crane</b> as per the technical specification & commercial conditions applicable (to be downloaded from web site <a href="www.bhel.com">www.bhel.com</a> or <a href="http://tenders.gov.in">http://tenders.gov.in</a> )	3 Nos.

#### Important points to be taken care during submission of offer:

- 1. Delivery required 10 months from the date of purchase order.
- 2. Grace period of 2 months beyond the above delivery period will be considered.
- 3. Check-list to be filled and enclosed along with the offer failing which, the offer will not be considered for evaluation.
- 4. Vendors are requested to submit their price bids along with technical bid individually for all the four sizes (Span x Lift x CT) indicated in Part B Technical Specifications.
- 5. The Quantity of Tender is Firm (ie.3 Nos). However the size wise quantity may vary according to final requirement. This confirmed size wise (Span x Lift) quantity will be communicated to vendors before Price Bid opening / Conduct of Reverse Auction.

BHEL's General guidelines / instructions including bank guarantee formats and list of consortium banks, Commercial terms check-list can be downloaded from BHEL web site <a href="http://www.bhel.com">http://www.bhel.com</a> or from the Government tender website <a href="http://tenders.gov.in">http://tenders.gov.in</a> (public sector units > Bharat Heavy Electricals Limited page) under Enquiry reference "2620900213".

Tenders should reach us before 14:00 hours on the due date Tenders will be opened at 14:30 hours on the due date Tenders would be opened in presence of the tenderers who have submitted their offers and who may like to be present

Yours faithfully,
For BHARAT HEAVY ELECTRICALS LIMITED

Manager / Capital Equipment / MM

#### PART A

### **SECTION-I: -QUALIFING CRITERIA**

#### The BIDDER/VENDOR (OEM) has to compulsorily meet the following requirements to get qualified for consideration of the technical offer for the SUPPLY OF SEMI GANTRY CRANE

S. No.	PARTICULARS	VENDOR'S RESPONSE
1.0	Only those Bidder/vendor (OEM), who have supplied and commissioned at least ONE 3Ton capacity Gantry or Semi Gantry crane class-3 with minimum span of 10 Mtr or higher and should have supplied frequency converter drive for similar capacity crane in the past five years and such crane is presently working satisfactorily for more than one year after commissioning (on the date of opening of Tender), should quote.  However, if such crane has been supplied to BHEL, then it should be presently working satisfactorily for more than six months after its commissioning and acceptance (on the date of opening of Tender) in BHEL.  Performance certificate from the customers (minimum 2) regarding satisfactory performance of machine supplied to them in attached format should be enclosed along with technical offer.	
2.0	BHEL reserves the right to verify the information provided by vendor. In case the information provided by vendor is found to be false/ incorrect, the offer shall be rejected.	
3.0	The bidding FIRM should have 'in-house' or 'selfowned' facility for FABRICATION and TESTING at 125 % of the rated capacity	
4.0	The vendor should have minimum 10 years experience in design, fabrication and supply of cranes.	
5.0	<b>DELIVERY</b> - The bidder shall quote the best possible delivery. However the delivery shall not exceed 10 months with an additional grace period of 2 months. The additional grace period will attract a penalty which is explained in the commercial terms of the enquiry. The delivery period shall be reckoned from date of purchase order to despatch from the vendor works.	

# $\underline{SECTION-II}$

The vendors are requested to provide the following details

S. No.	PARTICULARS	VENDOR'S RESPONSE
6.0	Number of Years of Experience of the BIDDER/ VENDOR (OEM) in the field of design, manufacture, supply, erection & commissioning of cranes	
7.0	Number of cranes supplied, installed and commissioned till date	
8.0	Number of cranes supplied, installed and commissioned till date in the QUOTED MODEL	
9.0	Number of cranes supplied, installed and commissioned till date for the following category of CUSTOMERS  a) Power Utility Boiler Manufacturer b) Equipment Supplier for Process Industries [Heavy Engineering Companies] c) Research Establishments	
10.0	Details on SERVICE-AFTER-SALES Set-Up in India including the Addresses of Agents / Service Centre in India and Asia	
11.0	Any Additional Data to supplement the manufacturing capability of the BIDDER for the subject equipment.	

R.F.P S.A R.R S.N A.V S.M Page | 2 of 4

## SECTION - III

Bidder / Vendor (OEM) to note the following

S.No.	REQUIREMENTS	VENDOR'S RESPONSE
12.0	The BIDDER / VENDOR shall submit the offer in TWO PARTS - Technical [with PART A & PART B] & Commercial and Price Bid.	
13.0	The Offer shall contain a comparative statement of Technical Specifications given by BHEL and the Offer Details submitted by the Bidder, against each clause. Where details are required, a mere 'CONFIRMED' or 'COMPLIES' or 'YES' or 'NO-DEVIATION' or similar words in the technical comparative statement may lead to disqualification of the Technical Offer.	
14.0	The Technical Offer shall be supported by Product Catalogue and Data Sheets in ORIGINAL and complete technical details of 'Bought-Out-Items' with copies of Product Catalogue and Selection Criteria	
15.0	The Commercial Offer (given with the Technical Offer) shall contain the Scope of Supply and the Un-Priced Part of the Price-Bid, for confirmation	
16.0	BIDDER has to indicate the Country of Origin for the supply of equipment.	

R.F.P S.A R.R S.N A.V S.M Page | 3 of 4

# PERFORMANCE CERTIFICATE (On Customer's Letter Head)

1. Supplier of the Equipment	:
2. Make & Model of the Equipment	:
3. Month & Year of Commissioning	:
4. Application	:
5. a) Crane Type:	
b) Crane Capacity (Metric Tonnes):	
c) Crane span :	
d) Mechanism class :	
6. Performance of the Equipment : (Strike off whichever is not applicable)	Satisfactory / Good / Average / Not Satisfactory
7. Any other remarks:	
Date:	Signature & Seal of the Authority Issuing the Performance Certificate

# PART B.

#### TECHNICAL SPECIFICATIONS FOR 3 T SEMI GANTRY CRANES WITH DOUBLE GIRDERS

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
1.0.0	APPLICATION	<ul> <li>a. The subject crane is meant for the purpose of handling small to medium (within the lifting capacity of the crane) components, in a heavy and large steel fabrication shop floor.</li> <li>b. The crane will be put to use for continuous duty with CT, LT and Hoist movements, which may occur simultaneously (within the operating parameters specified under Clause Nos. – 3.1.0, 3.4.0 and 3.5.0).</li> <li>c. The shop floor environment will be dust prone, humid, welding fume filled and ambient temperature going up to 45 ° C, due to pre-heating of jobs.</li> </ul>	
2.0.0	SCOPE OF SUPPLY	<ul> <li>a. Design as per Tender Specifications</li> <li>b. Detailed Design, Manufacture,</li></ul>	
3.0.0	TECHNICAL SPECIF	ICATIONS	
3.1.0	CAPACITY	Lifting Capacity	
3.1.1	Main Hoist	3 Metric Tonnes	
3.1.2	Auxiliary Hoist	NO AUX HOIST	

R.F.P S.A R.R S.N A.V S.M **1**|Page11

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
3.2.0	SPAN	Wheel Centre to Wheel Centre Dimensions	
3.2.1	Long Travel (LT) & Height of Lift	1. 14000mm / 5600mm 2. 14000mm / 3500mm 3. 11000mm / 5600mm 4. 11000mm / 3500mm	Rate may be quoted for each item separately.
3.2.2	Cross Travel (CT)	1,600 mm	
3.3.0	Height of Lift		
3.3.1	Height of Lift	As above	
3.3.2	Rail to Rail Height	1. 5600 mm 2. 3500 mm (Rail on the Floor to Rail on Side Bracket)	
3.4.0	DUTY CYCLE	Related to Drive Motor & Mechanisms	
3.4.1	Hoists	40 % CDF	
3.4.2	Long Travel	40 % CDF	
3.4.1	Cross Travel	40 % CDF	
3.5.0	SPEED	Operating / Working Speed [Maximum]	
3.5.1	Main Hoist	5.0 mtrs./minute.	
3.5.2	Cross Travel (CT)	15.0 mtrs./minute.	
3.5.3	Long Travel (LT)	30.0 mtrs./minute.	
3.6.0	MOTOR RATINGS	Electric Motor Ratings & Frame Sizes shall be as per IS-325 and IS-1231 and also suitable for 300 starts per hour.	
3.6.1	Main Hoist	Min 4.9 kW – Frame size - 132 M/6 Pole	
3.6.2	Cross Travel (CT)	Min 2.0 kW - Frame size - 112 M/6 Pole	
3.6.3	Long Travel (LT)	Min 2.6 kW x 2 - Frame size - 132 M/6 Pole	
3.7.0	GEAR BOX	Gear Box Size	
3.7.1	Main Hoist	HR 450 mm	
3.7.2	Cross Travel (CT)	VR 270 mm	
3.7.3	Long Travel (LT)	VR 400 mm	

R.F.P S.A R.R S.N A.V S.M **2** | Page 11

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
3.8.0	ACCELERATION		
3.8.1	Cross Travel (CT)	300 mm / sec.sq.	
3.8.2	Long Travel (LT)	300 mm / sec. sq.	
3.9.0	HOIST ROPE	Size and Number of Falls of Rope	
	DETAILS		
3.9.1	Main Hoist	Dia. 10 mm; Falls - 4	
3.10.0	CONTROL	Cabin Control only	
3.11.0	Type of Control	Master Control	
3.12.0	Control Voltage	110 V AC	
3.13.0	Input Power Supply	415 V with $\pm$ 10% fluctuation , 50HZ with $\pm$	
		3% fluctuation, 3 Phase- AC	
3.14.0	Duty Class	Class – 3 [Indoor Service]	
3.15.0	Mechanism Group	M 6	
	Classification		
3.16.0	DESIGN STANDARD	IS – 807 & 3177 / 2006	
3.17.0	Runway Rail Size		
3.17.1	Cross Travel (CT)	ISR 60 Lbs./Yard	
3.17.2	Long Travel (LT)	CR 80	
3.18.0	Wheel Size		
3.18.1	Cross Travel (CT)	250 mm	
3.18.2	Long Travel (LT)	400 mm	
3.19.0	Brake Drum Size	Hoist Brake Drum Sizes	
3.19.1	Main Hoist	200 mm	
3.19.2	Cross Travel (CT)	100 mm	
3.19.3	Long Travel (LT)	160 mm	
4.0.0	MAIN FEATURES	Crane Operational Features	
4.1.0	Control System	Frequency Converter type for all motions	
4.2.0	Crane Operation	From Cabin with Push Button operation	
5.0.0	STRUCTURAL FABRICATION	Crane Structure Constructional Details	
5.1.0	Bridge / Leg/ End Carriage/ Bogie	PLATE FORMED Box type Construction	

R.F.P S.A R.R S.N A.V S.M **3**|Page11

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
5.2.0	Raw Material	IS: 2062 Only steel plates tested and	
		certified for quality by reputed inspection	
		authorities, shall be used. Test Certificates to	
		be produced for BHEL verification and form	
		part of the documentation.	
5.3.0	Welded Joints	To be followed for Bridge/leg Fabrication	
5.3.1	Number of Joints	For Span upto 23 mtrs Two joints	
	allowed	For Span 23 mtrs. to 32 mtrs Three joints	
5.3.2	Welding Electrodes	a. For all Horizontal Welding E 7018 /	
		ER70S-6 (MIG) Electrode only should be	
		used.	
		b. For all Vertical Welding E 7048 / ER70S-6	
		(MIG) Electrode only should be used.	
5.3.3	Welded Joint Testing	All Butt Welded Joints (both compression /	
		tension and flanges / web joints) shall be	
		subjected to 100% X-Ray Testing and X-Ray	
		Films to be produced for BHEL verification	
		and form part of the documentation.	
5.4.0	Splice Joints	NO SPLICE JOINT IS ALLOWED IN GIRDER	
		FABRICATION [Girder has to be of SINGLE	
		PIECE only].	
5.5.0	Platform on Girders	The Platforms provided on both the Girders	
		shall be fixed through BOLTED JOINTS using	
		fit bolt only.	
5.6.0	Wheel Assembly	The Wheel Assembly coming for Cross Travel	
		(CT) & Long Travel (LT) shall be of LIVE AXLE	
		SYSTEM with L-Type Bearings. [Refer to BHEL	
		Drawing No. <b>3-M-02R-0011993</b> . Drawing is	
		enclosed and given as <b>ANNEXURE -1</b> ].	

R.F.P S.A R.R S.N A.V S.M **4**| Page 11

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
5.7.0	Heat Treatment &	The Trolley shall be Stress Relieved if	
	NDT Examination	required after welding and NDT examinations.	
		All weldings shall be tested by NDT means	
5.8.0	Machining Operation	[MPI, LPI & RT].	
5.8.0	Machining Operation	All mechanical mating surfaces and wheel seating areas are to be machined to the	
		required finish and protected	
5.9.0	Surface Cleaning	Both the Girders, legs, end-carriages and the	
3.7.0	Juriace orearing	Trolley are to be thoroughly cleaned after	
		completion of all operations but prior to	
		painting.	
5.10.0	Painting	The crane parts are to be painted as follows:	
		a. One coat of Primer with 25 microns of DFT	
		(Dry Film Thickness) and 48 hours of	
		compulsory curing after painting.	
		b. Two coats of Enamel Paint (Colour -	
		Golden yellow) each with a DFT of 25	
		microns and intermittent curing of	
		minimum 16 hours.	
6.0.0	MECHANICAL ELEM	•	
6.1.0	Gears	Gears in all the Stages shall be helical in	
		design and to be of machined, lapped/ground	
6.2.0	Gear Box Casing	and hardened.  Shall be of fabricated type and stress relived	
6.2.0	Gear Box Casing	by thermal heat-treatment process, prior to	
		machining.	
6.3.0	Gear & thruster oil	Required grade oil should be supplied	
6.4.0	Rope Drum	Shall be of fabricated type and stress	
· · · <del>-</del>		relieved. The circumferential weld joints shall	
		be tested by 100 % X-Ray for quality	
		assurance. Or seamless pipe to suit the	
		requirement	

R.F.P S.A R.R S.N A.V S.M **5**|Page11

CABS-3-61N-3 T Semi Gantry Crane- Part-B

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
6.5.0	Type of Coupling	Only GEARED COUPLING to be used	
		a. between Electric Motor and Gear Box	
		b. between Gear Box and Rope Drum	
		c. between Gear Box and Trolley Wheels	
6.6.0	Wheels	The Wheels shall be of Forged and Wheel	
		Tread hardened to 300/350 BHN. Wheels	
		shall be fitted with L-Type Bearings	
6.7.0	Mechanical Joints	Fit Bolts as per IS 3640-1982 for all joints	
		coming in main members and platform with	
		reamed holes	
6.8.0	Pulley Dimension	Rope Pulley diameter shall be 23 times that	
		of Rope diameter	
6.9.0	Hook	Hook latch shall be provided for both hooks	
6.10.0	Tools	The following tools of makes acceptable to	
		BHEL shall be supplied along with each crane	
		(Vendor to clearly specify the makes of each	
		items in the offer)	
		1 Double end spanner -one set	
		2 Ring spanner -one set	
		3 Hammer 2lbs -one no	
6.10.1	List of Tools	4 Screw driver -one set	
0		5 Screw spanner -one set	
		6 Cutting pliers -one set	
		7 line tester -one no	
		8 Grease gun -one no	
7.0.0	ELECTRICAL ELEME		
7.1.0	Operational Controls	The Crane shall be provided with the	
		Cabin Control [Master Control]	
		- Push Button Type]	
7.2.0	Control Voltage	110 V AC	
7.3.0	Type of Brakes	a. Main Hoist - DCEM Brake	
		b. Cross Travel - Thruster Brake	
		c. Long Travel - Thruster Brake	

R.F.P S.A R.R S.N A.V S.M **6**|Page11

CABS-3-61N-3 T Semi Gantry Crane- Part-B

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
7.4.0	Protection	All Panels, Limit-Switches and Motors shall	
		have IP 54 protection. (Outdoor Service)	
7.5.0	Electric Contactors	All Panels shall have only SIEMENS / L&T	
		Contactors and shall be suitable for AC3 Duty	
		Class.	
7.6.0	Contactors Rating	The rating of all Contactors shall be atleast	
		50% higher than the respective electric	
		motor full load current, at the specified duty	
		cycle.	
7.7.0	Long Travel Motion	A Dual Drive Mechanism shall be provided for	
		LT (Long Travel) Motion.	
7.8.0	Controller Steps	4-Step 40amps master Controller with two	
		neutral inter lock has to be provided for	
		a. Main Hoist	
		b. Long Travel	
		c. Cross Travel	
7.9.0	Crab Wiring	The CRAB shall be fully wired without	
		junction box.	
8.0.0	SELECTION of BOI	The makes of Components or Bought-Out-Item	is shall be strictly as per the list given
	and COMPONENTS	below.	
8.1.0	Hoist Hooks	HERMAN MOHTTA / HERCULES / SILPA	
		UDYOG / SMRITI FORGINGS /	
		KARACHIWALA	
8.2.0	Wire Rope	USHA MARTIN / FORT WILLIAM / RA WIRE	
		ROPE	
8.3.0	Electric Motors	GEC / BHARAT BIJLEE / SIEMENS / KEC/	
		ALSTHOM	
8.4.0	Thruster Brake Unit	ELECTROMAG / SPEED-O-CONTROL / OMEGA	
8.5.0	Limit Switch	SIEMENS / INDUSTRIAL SYNDICATE /	
	(Gravity Type)	BCH / SKC / SOC	
8.6.0	Contactors	SIEMENS / L&T	
8.7.0	Over-Load-Relay	SIEMENS / L&T (THERMAL TYPE)	
8.8.0	HRC Fuses	GE / L&T /SIEMENS	

R.F.P S.A R.R S.N A.V S.M **7** | Page 11

CABS-3-61N-3 T Semi Gantry Crane- Part-B

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
8.9.0	Rotary limit switch	SIEMENS / OMEGA / SOC /	
		INDUSTRIAL SYNDICATE	
8.10.0	Switch fuse unit	L&T / SIEMENS / GEC	
8.11.0	Moulded case CB	SIEMENS / L&T	
8.12.0	Pneumatic Time	Only BCH make	
	Delay		
8.13.0	Push - Buttons	SIEMENS / L&T /AIRON	
8.14.0	Connectors	ELMAX make or reputed make with IS	
		approved with acceptable BHEL	
8.15.0	Couplings	WMI / FENNER / ALFEX/REPUTED	
8.16.0	Bearings	SKF / NBC / ZKL	
8.17.0	Cables	Reputed Makes & ISI Approved acceptable by	
		BHEL.	
8.18.0	Resistance box	OHMARK / BCH	
8.19.0	VVVF Drives	ABB / SIEMENS / L&T	
8.20.0	DCEM Brakes	BCH only	
9.0.0	DOCUMENTS/	The following documents and details are to	
	DETAILS for	be submitted for BHEL Approval, prior to	
	APPROVAL	taking up the manufacture of the crane.	
9.1.0	Drawings and	Set I:	
	Documents	a. Calculations for Selection of Electric	
		Motors, Gear Reducers, Brakes, Couplings,	
		etc.	
		b. Calculations for Bridge Girder, Legs, Crab,	
		End - Carriage and their connections.	
		c. GA Drawing of the Crane.	
		d. GA Drawing of Trolley	
		e. GA Drawing of Individual Mechanisms.	

R.F.P S.A R.R S.N A.V S.M **8** | Page 11

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
9.1.0	Drawings and Documents	<ul> <li>Set II:</li> <li>a. Drawings of Bridge, Legs, End-Carriage bogies and their connection.</li> <li>b. Sub-Assembly Drawing for Wheels, Hook Blocks, Gear Boxes, Hoist rope drums and all brake Drums.</li> <li>c. Wiring Diagram with Logic Circuits.</li> <li>d. Cable Selection based on Current Rating.</li> </ul>	
		Initially Set I drawings to be submitted in one lot and approval to be obtained from BHEL. Based on this, set II drawings to be submitted for approval.	
9.2.0	Technical Details	<ul> <li>a. Total Weight of the Crane including all Electrical Equipment</li> <li>b. Total Weight of Trolley including all Electrical Equipment</li> <li>c. Weight of each Bridge assembled and ready for erection with and without Mechanical and Electrical Equipment.</li> <li>d. Weight of End-carriage assembled and ready for erection</li> <li>e. Total Weight of Structural, Mechanical and electrical Equipment and indicated separately also.</li> <li>f. Weight of Operator's Cabin together with all Equipment mounted in it.</li> </ul>	
10.0.0	INSPECTION	The following Schedule of Stage Inspections is to be strictly adhered to, prior to dispatch from the Supplier's Works	

R.F.P S.A R.R S.N A.V S.M **9**| Page 11


S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
10.1.0	STAGE – I	<ul> <li>a. Verification of Test Certificate for Raw Materials used for Girders, legs, End-Carriages, Trolley, Gear Box Casings, etc.</li> <li>b. Verification of X-Ray Report of Butt-Joints coming in the Girders and Random Testing on the Welds, by physical examination.</li> <li>c. Box Girder setting before closing of the Bottom Flanges – for inspecting the quality of welding and presence of waviness</li> <li>d. Trolley Frame Fabrication before setting the Mechanisms</li> <li>e. End-Carriage Fabrication before closing</li> </ul>	
10.2.0	STAGE – II [Final Inspection]	<ul> <li>of the Bottom Flanges</li> <li>a. Inspection of Bridges, legs, End–Carriages and platform fabrication.</li> <li>b. Verification of Span &amp; Diagonal Dimensions, Checking of Wheel Alignment, Mechanical Assemblies and Total Alignment.</li> <li>c. Free running of all the Mechanisms.</li> <li>d. Measurement of CAMBER in the Bridges.</li> <li>e. Full / Rated Load Test for bridges and trolley and Deflection Test</li> <li>f. Deflection and Permanent Set Measurement.</li> <li>g. 25% OVER-LOAD Lifting Ability Check.</li> </ul>	
11.0.0	<b>CRANE ERECTION 8</b>		
11.1.0	Mechanical Erection	Erection of the Crane will be done by BHEL, as per the guidelines furnished in the Erection Manual given by the supplier.	

R.F.P S.A R.R S.N A.V S.M **10** | Page 11

S.No.	PARTICULARS	BHEL SPECIFICATIONS	VENDOR'S OFFER
11.2.0	Crane Commissioning	Commissioning of the Crane and Performance Prove –Out for 125% of Crane's Capacity and Smooth Functioning of the Crane (at BHEL Works) shall be the RESPONSIBILITY of the supplier.	
12.0.0	O & M MANUALS	Each Crane shall be provided with THREE Copies of Erection, Operation & Maintenance Manual hard copy as well as soft copy in CD, containing the following technical details	
12.1.0	Drawings & Details	<ul> <li>a. Crane GA Drawing</li> <li>b. Crab Assembly Drawing</li> <li>c. Total Crane Wiring Schematics</li> <li>d. Detailed Wiring Diagrams for Sub-Systems / Panels</li> <li>e. Wheel Assembly Drawings</li> <li>f. Bottom Block Assembly Drawing</li> <li>g. Gear Box Assembly Drawings</li> <li>h. Coupling Drawing and Details</li> <li>i. Specifications/Ratings of All Bought-Out-Items</li> <li>j. Warranty / Guarantee Card for all Bought-Out-Items</li> <li>k. Trouble Shooting Chart for Main and all Sub-Systems</li> </ul>	
13.0.0	PERFORMANCE GUARANTEE	The Performance of the Total Crane and/or the Components / Sub-Assemblies / Bought-Out-Items shall be guaranteed for a minimum period of twelve months from the date of performance acceptance at BHEL Works or 18 months from the date of supply whichever is earlier.	

R.F.P S.A R.R S.N A.V S.M **11** | Page 11

⊴16	000 (050	CR-100 CR-120	190	450	80	210	150	152	140	130	212	255	32	32x18x130	687	588	20	150	80	107	22330 150x320x108	870.00 845.00
15	800/850	CR-80	168	420	80	180	110	152	125	110	212	255	32	28x16x115	687	588	20	150	· 80	106	22330 150x320x108	796.00 775.00
14		CR-100 CR-120	190	450	80	210	150	152	140	130	212	255	32	32x18x130	642	588	20	150	80	107	2 <b>2330</b> 150x320x108	808.00 784.00
13	710/750	CR100 CR-120	180	420	71	210	150	132	125	110	180	224	32	28x16x115	607	517	20	130	80	106	22326 130x280x93	728.50 711.50
12		CR-80	180	400	71	180	110	132	125	110	180	224	32	28x16x115	607	517	20	130	80	106	22326 130x280x93	653.00 636.00
11	630/680	CR80/CR-100 & CR-120	180	420	71	210	150	132	125	110	180	224	32	28x16x115	567	517	20	130	80	106	22326 130x280x93	629.00 611.50
10	630/660	90-105 Lbs/Yd CR-80	150	365	60	180	105	111	110	90	160	190.	26	25x14x100	547	462	20	120	60	105	22322 110x240x80	448.00 434.50
9		CR-80 CR-100	160	375	60	180	125	111	110	90	160	190	26	22x14x100	482	462	20	120	60	105	22322 110x240x80	253.00 245.50
8	500/550	CR-80	150	360	50	180	125	91	105	80	125	160	26	22x14x90	445	395	20	100	50	104	22318 90x190x64	389.00 378.00
7		60/75/90 & 105 Lbs/Yd	150	360	50	180	105	91	105	80	125	160	26	22x14x90	445	395	20	100	50	104	22318 90x190x64	301.00 294.00
6	400/450	CR-80 CR-100	150	360	50	180	125	91	105	80	125	160	26	22x14x90	395	395	20	100	50	104	22318 ) 90x190x64	253.00 245.50
5	400/430	90 Lb9/Yd 105 Lb3/Yd	145	315	40	180	105	76	85	70	112	140	22	20x12x75	375	345	16	90	50	103	22315 75x160x55	197.00 192.00
4	700 /770	75 / 90 & 105 Lba/Yd CR-80	145	315	40	180	105	76	85	70	112	140	22	20x12x75	345	345	16	90	50	103	22315 75x160x55	162.00 157.00
3	320/370	50 SQ.BAR 60 Lba/Yd 75 Lba/Yd	112.5	260	40	125	85	61	65	55	85	11,2	17 .	16x10x55	312	287	16	80	50	102	22312 60x130x46	118.50 118.00
2	250/280	50 SQ.BAR 50 / 90 ½ 105 (63/Yd	105	250	32	125	85	61	65	55	76	100	17	16x10x55	254	249	12	60	40	102	22212 60x110x28	66.00 63.00
1	200/ <b>23</b>	. 50 €5a/Yd	95	220	32	100	67	46	55	40	71	95	17	12x8x45	239	232	12	65	40	101	22309 45x100x36	51.00 50.00
SL.	10.0.	RAIL.	Α	В	D	E	F	øG	Н	ØJ	K	L	ød	M (KEY)	N	Р	Q	S	<sup>∰</sup> R	COUPLING	SKF BRG No. &	TOTAL WEIGHT IN Kg.
No.	(WHEEL DIA)	SIZE	i									DIMEN	ISIONS		<i>}</i>		<u>.</u>			No.	BRG. SIZE	FOR DRIVE & IDLE

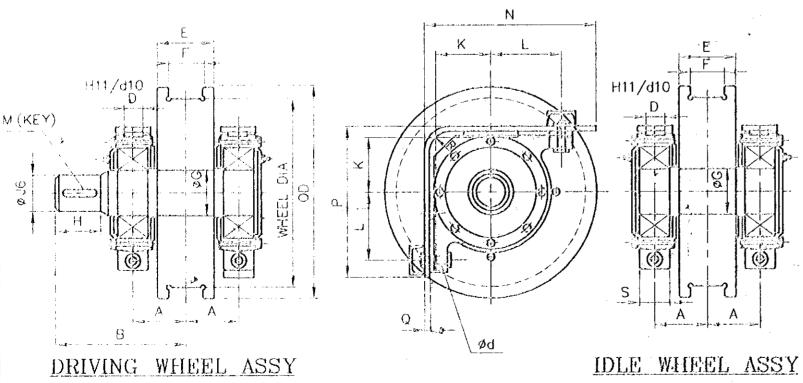

MATERIAL :-

SHAFT - 45CB/IS:7283.

WHEEL - 55CB/IS:55IT.

FORGED.

THEAD PORTION WHEEL HARDNESS 500 TO 550 (BHN)

									٠		٠ س	
X								•				
No.of Pleces		DE:	SCRIPTION	MATERIAL	STANDARI	0 N	ALTW,T3	I KGS.		DRAVINO	. No،	ITEM No.
REFER	ENCE:		4 P 4 4 4 - 4 - 4 - 4 - 4 - 4 - 4 -	r-160	COUE: 29			EQU	MPHENT	CODE	00,	
	:		. ^	W	ALTERATION	NSı		DCN. R	EF	DATE	SIGN	INDEX
SCALE	DRAWN		Blw.							· .	4	
\	CHECKE	D	R. Ramamortis							Ì		
	APPRO\	/ED	Muster					/		11		
	DATE.		20-10-2000								1 2	
		MAC	HINE CRANE WHE	EL AŞSY		TYPE	. GENE	RAL			4	
(iii	(J,I)	TIT	STAND	YDD)	DRAVING NO			i .	(0.0)			REV.
17.1					3-M-02R-119					93		
		C	RANE WHE	EL ASS	Y	O M OWI				TIO		
						No.of	Sheats			Sheet No		