

Attachment to Enquiry No. C3A1Z45811				
Special Conditions of Contract (SCC)_NIC				
Sl.No	Clause No	Clause	BHEL Requirements	Bidder response
1	NA	Technical Requirements	Description of Material: 1) 5,28,000 Kgs of UN-INSL CRNGO STEEL SHEET 0.5 X 570 X COIL as per BHEL specification : AA10907, Rev:06 Note : UN-INSULATED CRNGO STEEL WITH RUST PREVENTIVE COATING BOTH SIDES SIZE:0.5X570XCOIL. Material shall be supplied as per specification, Drawing, quantity and given size.	
2	3	Mode of Submission	NIC Portal	
3	5	Type of Bid	Two Part	
4	6	Indigenous purchase - Destination	BHEL, RCPuram, Hyderabad	
5	9	Offer validity	90 DAYS FROM TECHNICAL BID OPENING	
6		Delivery	Quoted price shall be "FOR-BHEL Hyderabad stores Basis" including Freight & Insurance charges.	
7	8	Delivery Period	1. Quantity 48,000 Kgs - To be delivered by 08.12.2026. 2. Quantity 2,40,000(60,000 X 4) Kgs - To be delivered by 03.01.2027. 3.Quantity 2,40,000(60,000 X 4) Kgs - To be delivered by 03.02.2027.	
8	18	Evaluation basis	Total	
9	Others	Quantity Split	MSE and MII purchase preference applicable	
10	12	Payments Terms	AS PER ITB 18	
11	13	Max Penalty applicable on	AS PER ITB 18 ON DELAYED VALUE	
12	16	Guarantee / Warranty Period	AS PER ITB 18	
13		Drawing approval	NA	
14		QAP approval	APPLICABLE	
15	11	Taxes	As per ITB 18	
16	36	Inspection by	BHEL TPI Agency	
17	NA	<u>Quantity tolerance:</u>	+5% on weight and order value is acceptable	
18	NA	Reverse Auction	NA	



TECHNICAL PRE-QUALIFICATION REQUIREMENT (PQR) FOR PROCUREMENT OF CRNGO

PQR/EME/2022/006

REV NO: 00 DTD 13.01.2022

PAGE: 1 OF 2

S.No	Description of Pre-Qualification Required	Vendor's Response Compiled (Yes/No)	Supporting Documents required to accept compliance
1	Complete compliance to specification/drawing as per BHEL enquiry.		Clause by clause acceptance or signed & stamped copies of specification/drawing mentioned in BHEL enquiry.
2	The OEM must have adequate manufacturing facilities at their works/in-house for manufacturing these materials.		1. List of plant & machinery available for manufacturing the tendered item, at manufacturers' works to be provided. 2. Pictures of manufacturing facility to be submitted.
3	Testing facilities required to conduct all the tests as per specification/drawing mentioned in BHEL enquiry must be available with the firm. List of outsourced facilities, if any, to be submitted. Outsourced labs/firms should be Govt/NABL accredited.		1. Details of testing facilities available with the firm required for testing of said item along with list of outsourced facilities (if used) to be provided. Documentary evidence of Govt/NABL accreditation of outsourced labs to be submitted. 2. Pictures of in-house test facility to be submitted.
4	Source of Raw material – Raw materials to be sourced from reputed national/international brands.		Source of raw materials to be disclosed.
5	a) Vendor to furnish QAP that shall be followed during manufacturing. b) Vendor to furnish their organization chart		QAP & Organization chart duly signed and stamped.
6	a) The bidder should have supply experience of supplying this material in the last 5 years before the enquiry due date. b) The supply experience submitted should be for high voltage (11KV and above) rotating machines (> 1500rpm) to reputed Generator/Motor manufacturers.		a) Copies of unpriced POs and corresponding invoices. b) Documentary evidence. Also, list of major customers to be submitted.



TECHNICAL PRE-QUALIFICATION REQUIREMENT (PQR) FOR PROCUREMENT OF CRNGO

PQR/EME/2022/006

REV NO: 00 DTD 13.01.2022

PAGE: 1 OF 2

- 7 Vendors who have not supplied this material to BHEL shall comply the following.
- a) Vendors has to supply free samples meeting technical requirements as per mentioned specification/drawing.
 - b) The samples shall be tested at BHEL Hyderabad for technical suitability and usability.
 - c) Test Certificates (comprising of all tests as per mentioned specification) shall be submitted along with the samples within 15days of enquiry due date. If the sample is not submitted within stipulated time, the offer is liable to be rejected. Test Certificate shall be from NABL accredited LABs.
 - d) If the vendor does not qualify in any of the points 1 to 6 of this PQR, sample evaluation will not be done.

Confirmation to be provided.

Annexure-I			
Major Activity timelines shall be considered for indigenous purchases			
S No	Activity	Agency	Timeline
1	PO acknowledgement	Vendor	_____ days from PO
2	Submission of Drawings and QP	Vendor	_____ days from PO
3	Approval of Drawings and QP	BHEL/Customer	_____ days from PO
4	Raising of Inspection Call	Vendor	_____ days from PO
5	Inspection completion	Self/BHEL/Third party inspection agency	_____ days from inspection call date
6	Despatch Instructions	BHEL	_____ days from inspection report
7	Reciept of Material	Vendor	_____ days from Despatch instructions

Above is illustrative only. Purchase department can add more activities depending on nature of prodcut/contracts

However absence of this annexure in NIT will entail non processing of delivery extention cases in case of delay in supplies of goods owing to reason attributable to BHEL.

Annexure - III

Proforma for self-certification by Supplier for minimum local content on their letter head for tender value less than Rs 10 Crore

"We _____ (Name of Manufacturer) undertake that we meet the mandatory minimum Local Content (LC) requirement i.e. _____ (to be filled as notified in the policy) for claiming Purchase Preference linked with Local Contents under the Govt. policy against tender no. _____."



ANNEXURE IV

Proforma for self-certification by Supplier for Compliance to below Clause

Clause: Any Bidder from a country which shares a land border with India will be eligible to bid in this tender only if the bidder is registered with competent authority. <https://www.mea.gov.in/> to be referred for latest details of competent authority and exemptions.

I have read the clause regarding restrictions on procurement from a bidder of a country which shares a land border with India and I certify that M/s _____ **(Name of firm)**

(Tick the Appropriate)

☐ **Is not from such a country**

☐ **Is from such a country and has been duly registered with the Competent**

authority. (If, Yes Please enclose the Approval obtained from Competent Authority)

I hereby certify M/s _____ **(Name of firm)** fulfills all requirements in this regard and is eligible to be considered (where applicable, valid registration by the competent authority shall be attached)

Sd/-
Authorized Signatory with Stamp

**CORPORATE PURCHASING SPECIFICATION**

AA 109 07

Rev. No. 06

PREFACE SHEET**COLD ROLLED NON-GRAIN ORIENTED SHEET STEEL - Gr : 310****FOR INTERNAL USE ONLY****REMOVE THIS PREFACE SHEET BEFORE ISSUE TO SUPPLIERS****Comparable Standards:**

- | | | |
|------------------|---|--|
| 1. GERMAN | : | DIN EN 10106 - 1996
Gr : M 310-50 A |
| 2. INTERNATIONAL | : | IEC-404-8-4 - 1986
Gr : 310-50-A5 |

Suggested/Probable Suppliers And Grades:

- | | | |
|--|---|--------------|
| 1. M/s John Lysaght, Australia | : | Ly-Core130 |
| 2. M/s Kawasaki Steel Corp., Japan | : | RM-10 |
| 3. M/s Nippon Steel Corp., Japan | : | H-10 |
| 4. M/s Electroblechaus Bochum - Germany | : | M 310 - 50 A |
| 5. M/s Preussag Handel GNBH Export Germany | : | M 310 - 50 A |
| 6. M/s Sura Hammer, Sweden | : | CK 31 |

User Plant References:

- | | | |
|-------------------|---|---------|
| 1. BHOPAL | : | — |
| 2. HARDWAR - HEEP | : | — |
| 3. HYDERABAD | : | TADS 80 |

Revisions :

Cl.23.7.67 of MOM

APPROVED : Interplant Material**Rationalisation Committee-MRC (S&GPS)**

Rev. No. 06	Amd.No.	Reaffirmed	Prepared	Issued	Dt. of 1 st Issue
Dt. : 15-11-99	Dt :	Year :	HYDERABAD	Corp. R&D	Feb. '76



CORPORATE PURCHASING SPECIFICATION

AA 109 07

Rev. No. 06

PAGE : 1 OF 9

COLD ROLLED NON-GRAIN ORIENTED SHEET STEEL - Gr : 310

1.0 GENERAL:

This specification governs the quality requirements of Un-Insulated & Insulated (double side), unpigmented type, cold rolled, non-grain oriented magnetic steel sheet or coil in finally annealed condition in 0.50 mm thick.

2.0 APPLICATION:

Laminations of Electrical Machines.

3.0 CONDITION OF DELIVERY:

3.1 Cold Rolled, Finally Annealed.

3.2 The material shall be supplied in straight lengths (sheet form) or in coils, to the ordered thickness as specified in BHEL order.

3.3 Magnetic steel sheets or coils shall be supplied with or without insulation coating, as detailed below, and as called for on BHEL order.

a) 0.50 mm / Thick - Insulated: *

Double side insulated (unpigmented type) with 3 to 6 micron thickness coating on each side. The insulation coating shall comply with clause 3.4 & 8.6 of this specification.

b) 0.50 mm/Thick - Uninsulated: *

Un-insulated, protected on both sides by rust preventive coating of thickness 2 ± 1 microns.

*Note:

- (i) The supplier shall furnish the details of such coatings alongwith the quotation.
- (ii) The surface finish of the insulation coating shall be such as to allow subsequent uniform coating without any problem.

3.4 Type Of Insulation Coating:

The insulation coating used for the insulated steel sheets referred in clause 3.3 (a) above shall be an uniformly applied, tightly adherent, phenolic based insulation coating on both sides, complying to AISI C3 quality of unpigmented type (Organic enamel/varnish coating) and shall meet the requirements detailed in Clause 8.6.

Revisions :

Ref. CL23.7.67 of MOM

**APPROVED : Interplant Material
Rationalisation Committee-MRC (S&GPS)**

Rev. No. 06	Amd.No.	Reaffirmed	Prepared	Issued	Dt. of 1 st Issue
Dt. : 15-11-99	Dt :	Year :	HYDERABAD	Corp. R&D	Feb. '76

4.0 COMPLIANCE WITH NATIONAL STANDARDS:

Material shall comply with the requirements of DIN EN 10106-1996, Gr:M310-50A.

5.0 DIMENSIONS AND TOLERANCES:

5.1 Sizes:

Magnetic steel sheet shall be supplied to the dimensions and coating specified on BHEL order.

5.2 Tolerances:

5.2.1 Thickness:

The permissible deviation in nominal thickness shall be $\pm 8\%$. The variation in thickness in a direction parallel to the direction of rolling shall not exceed $\pm 8\%$ of the nominal thickness.

The variation in thickness in a direction perpendicular to the direction of rolling shall be ± 0.020 mm. The measuring points should be at least 40 mm away from the edges of the sheets.

5.2.2 Width:

The tolerance for width of material supplied with trimmed edges shall be as follows:


Width, mm		Tolerance, mm	
Over	Upto & incld.	Plus	Minus
-	150	0.3	0
150	500	0.5	0
500	1250	1.5	0

5.2.3 Length:

When supplied in sheet form the tolerance on length shall be $+ 1\%$, but shall not exceed $+ 10$ mm, $- 0$.

**5.2.4 Straightness/Edge Camber:**


The straightness tolerances for the longitudinal edge (edge camber) over a gauge length of 2000 mm shall not exceed 4 mm for width upto and including 150 mm and 2 mm for widths exceeding 150 mm.

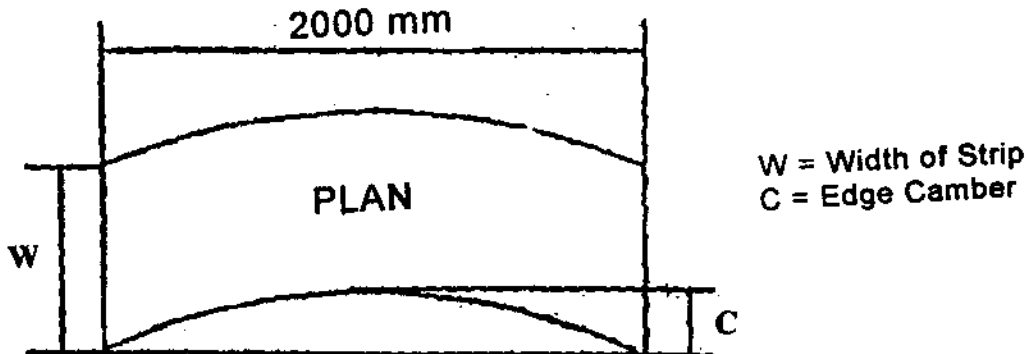**5.2.5 Edge Burr:**

The height of edge burr shall not exceed 50 microns.

5.2.6 Bowing - Coils:

The material when unwound from a coil shall be placed flat on a level smooth surface (surface plate) such that it has a radius not less than 3000 mm. The specimen shall be stood upright and free from constraint with one longitudinal edge on the surface of the plate. A straight edge with a length of 500 mm, when placed against the specimen and when measuring the greatest distance 'h' between the straight edge and the product should not be more than 10 mm as detailed below:

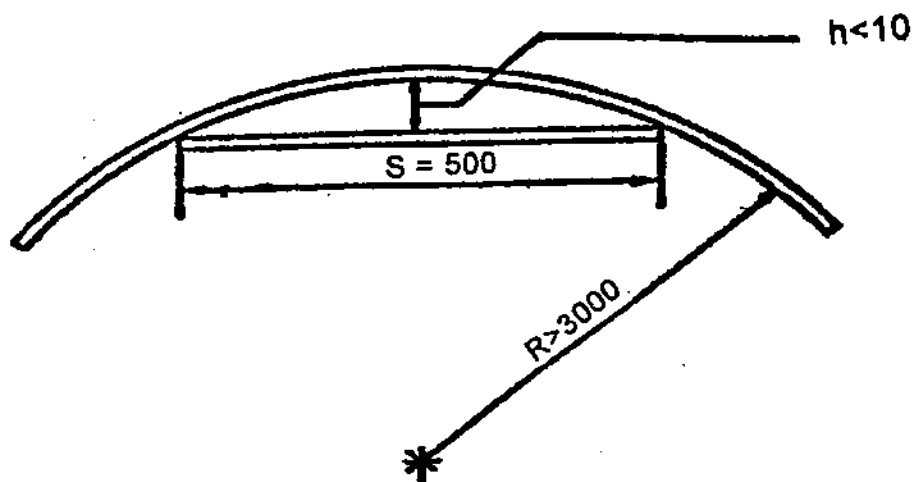

**5.2.7 Waviness/Flatness**

The Waviness/Flatness shall not exceed 1.5% (i.e the relation of the wave height to wave length).

6.0 FINISH:

The material shall have a smooth surface and shall be free from loose scale, buckle or dents, waviness and internal stresses.

7.0 TEST SAMPLES:

The test samples of the same heat/melt and thickness shall be selected from the consignment as follows:

Upto 30 tonnes	: 1 sample
Above 30 to 60 tonnes	: 2 samples
Above 60 tonnes	: 3 samples

The test samples shall be of sufficient size to provide the necessary test pieces.

8.0 PROPERTIES (AS RECEIVED):**8.1 Bend Test:**

A test piece of 30 mm width x 60 mm long taken in rolling direction in the ordered thickness shall withstand a minimum of 2 bends without fracture, through 180 deg. over a 5 mm radius jaws when tested to IS : 649/DIN EN 10106.

8.2 Stacking Factor:

The surface quality of the sheets when measured in terms of stacking factor as per IS:649 (on a minimum of 16 samples under a pressure of 35 N/cm²) shall be as follows:

0.50mm thick-Double side coating : 95.5%, minimum

0.50mm thick-Uninsulated : 96%, minimum.

8.3 Total Specific Loss:

The specific total loss on aged specimens (a specimen which has been heated for 24 hours at 225 ± 3 deg.C) shall be as follows, when tested as per IS:649/DIN 50462 at a frequency of 50 Hz for the specified flux density.

3.10 Watts/kg, Maximum - At 1.5 Tesla

8.4 AC Magnetisation:

When tested to IS:649/DIN 50462, the AC magnetic field (H) in Ampere/metre (Peak), shall show the following minimum corresponding values of magnetic induction (B) in Tesla (Peak).

AC Magnetic Field Strength 'H' A/m (Peak)	Magnetic Induction Min.(B) Tesla (Peak)
2500	1.49
5000	1.60
10000	1.70

**8.5 Anisotropy of Losses:**

When tested to IS:649/DIN EN 10106 as detailed below, the Anisotropy losses shall not exceed $\pm 14\%$.

To determine the loss ANISOTROPY the specific total losses should be measured separately on specimens taken parallel and perpendicular to the rolling direction. The loss Anisotropy, in percent, is found from the following expression:

$$\frac{P_q - P_l}{P_q + P_l} \times 100 \text{ where,}$$

P_q denotes specific total losses perpendicular to the rolling direction.

P_l denotes the specific total losses parallel to the rolling direction.

8.6 Testing Of Insulation Coating:

The insulation coating when tested as detailed below shall show the following properties.

8.6.1 Selection Of Test Samples For Insulation Coating:

The outermost and innermost turn of coil or the top-most and bottom-most of a stack of sheets, shall be considered as wrapping and not representing the properties of the remaining material and hence shall not be considered for test specimen.

In case of coils, the test specimens shall preferably be taken from the first external turn excluding the wrapping turn and in the case of sheet, it shall be from the upper part of the stack. In special case, it can be taken from any other part also.

The test specimen shall extend over the entire sheet width and can be about 350 ± 2 mm long. In case of sheet width, below 400 mm, the specimen shall be 500 ± 2 mm long.

The surface of the strip shall be free from contaminations and damages and shall be cut without deformation and as far as possible, without burrs. Any cleaning done shall not damage the insulation coating.

8.6.2 Coating Layer Thickness:

Both sides of the sheet shall be coated and shall have a thickness of 3 to 6 microns on each side.

At least 15 readings shall be taken on each side at equal intervals. 95% of the readings shall lie between the above specified value. The thickness of any pre-coating shall not be accounted for.

Thickness shall be measured using a thickness gauge conforming to IS : 6012.

8.6.3 Surface Insulation Resistivity:

When tested as per ASTM, A 717 - Franklin's Method, at a pressure of 2 N/mm^2 , at room temperature the minimum average of 10 non-overlapping resistance measurements (5 on each side) shall be 30 Ohm-cm^2 with a minimum allowable individual value of 10 Ohm-cm^2 .

AA 109 07	CORPORATE PURCHASING SPECIFICATION	
Rev. No. 06		
Page : 6 of 9		

8.6.4 Type Tests*:

8.6.4.1 Adherence Test:

The surface coating shall be sufficiently adherent so that it does not get detached during insulation and shearing. In the reverse bending test with a bending radius of 5 mm, the surface coating shall not be detached after bending through 90 deg.

8.6.4.2 Thermal Effect On Coating:

Twelve specimens of the coated strip shall be clamped together under a pressure of 1 N/mm² approximately and heated in a laboratory oven at a temperature of 150±3°C for a period of seven days. After cooling to the room temperature, the surface insulation resistivity values of the middle ten specimens shall not be less than the minimum specified values mentioned in Cl.8.6.3.

8.6.4.3 Resistance To Solvents, Oils:

The specimens shall be kept in a container filled with any of the following solvents/oil and boiled for 5 minutes. After removal and cooling to the room temperature, the coating shall not get soft enough so that it can be wiped off.

The insulation film shall be resistant to conventional organic solvents like trichloroethylene, methylated spirit, acetone, benzene, etc. and oil. In special cases and when specified on BHEL order, the insulating film shall be resistant to ammonia also.

***Note:**

'Type tests', shall be carried out when, 'Type Approval', to a supplier is given and repeated once in two years for the approved supplier.

9.0 TEST CERTIFICATES:

Three copies of Test Certificate shall be supplied unless otherwise agreed to. The supplier shall ensure to enclose one copy of the Test Certificate alongwith the despatch documents to facilitate quick clearance of the material.

The test certificate shall bear the following information:

AA 109 07 : Rev.06/DIN EN 10106 Gr: M310-50A, BHEL Order No, Suppliers Name & Grade, Identification No, Melt No, Size & Weight, Packet/Bundle No, Test Results of Dimensions & Properties as per the concerned National Standard & Insulation /Rust Preventive Coating, as above.


10.0 PACKING AND MARKING:

10.1 Material Supplied In Straight Length:

Magnetic steel sheets shall be supplied in bundles. The packing shall be sea-worthy and shall protect the material from damage in transit. A typical packing which would be suitable is shown below.

Each sheet shall be marked with supplier's grade/references.

These markings shall be along the rolling direction.

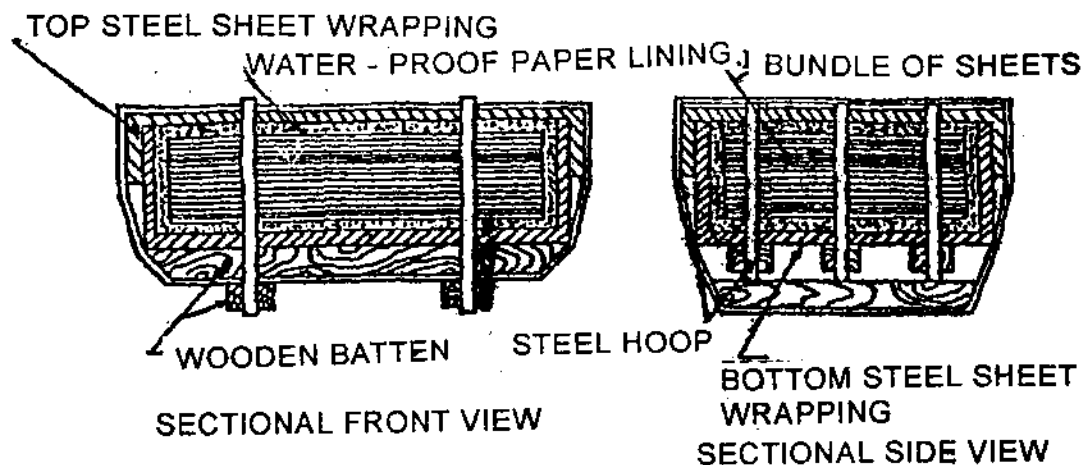

DETAILS OF PACKING FOR MAGNETIC STEEL SHEET

Note:

- Water proof paper lining shall be preferably Volatile Corrosion Inhibitor (V.C.I.) Coated Paper with an additional polythene (100 micron) enveloped
- Approximate weight of each bundle shall be 2 to 3 metric tonnes. Bundle weighing 2 metric tonnes is however preferred.
- The packing should ensure that there is no seepage of moisture and the sheets reach BHEL in completely rust free condition. It shall be strong enough to withstand handling at the docks, at sea and on the road.

10.2 Material Supplied In Continuous Coil:

The nominal weight of each coil shall be 1800 - 2000 kg.

The nominal internal diameter of coil shall be 508 mm.


Packing shall be sea-worthy and shall protect the coils from damage and rusting during transit.

The supplier's grade/reference shall be marked at every one metre intervals throughout the coil length. Coils shall be vertically packed according to the instructions and drawing given below.

- An annular protection board shall be placed at either end of the coil.
- The coil shall then be wrapped with waterproof anti-rust proof paper by lapping axially all around the circumference.
- The coil shall then be covered by polythylene sheet or anti-rust waterproof paper and the ends sealed properly.
- A galvanised sheet shall be wrapped on the outside of the coil and the top and bottom of the coils. Care shall be taken to ensure that the ends of the top and bottom of the coils extend sufficiently over the inside diameter of the coil.



- e) A galvanised sheet shall be wrapped on the inside of the coil. Care shall be taken that it overlaps sufficiently over the ends of the sheet mentioned in (d) above.
- f) Steel ring made from thick angle sheets shall be placed on the rim of the inner diameter at both ends of the coil. The rings shall be held at either ends at four points by steel bands.
- g) The coil shall then be mounted on wooden skids held together by steel bands. Wooden skids must have cutouts to house the steel bands for tight fit and to avoid slippage.
- h) The packing shall ensure that there is no seepage of moisture and the coils reach BHEL in completely rust free condition. It shall be strong enough to withstand handling at the docks, at sea and on the road.
- i) Coils shall be sufficiently tight-wound to prevent collapse to an extent that would preclude their being mounted on a mandrel appropriate to the ordered internal diameter.
- j) Each package should indicate the , Sling Position, for lifting without damage. It is preferable to fix a suitable size of, 'Sheet Steel Angle', at the position where the Sling Rope is to be fitted to avoid slippage/damage/breakage of the wooden skid at four places.

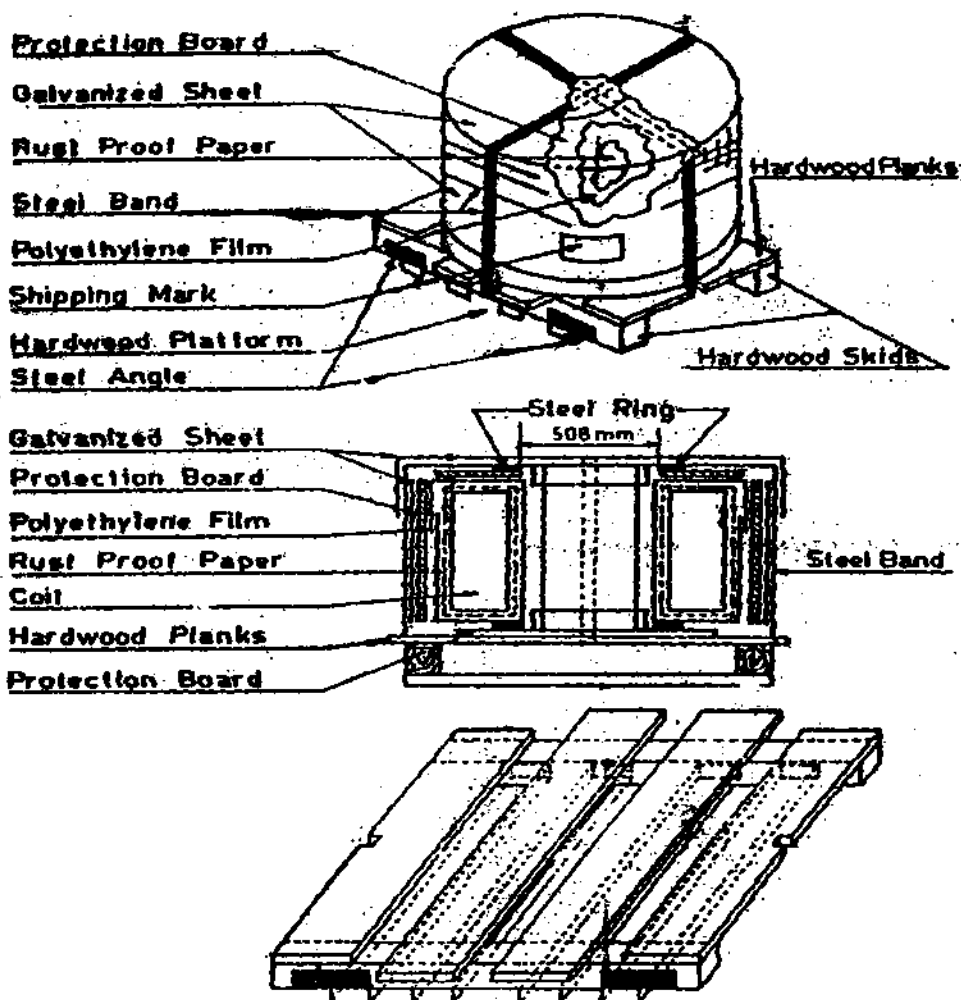



CORPORATE PURCHASING SPECIFICATION

AA 109 07

Rev. No. 06

Page : 9 of 9

10.3 Marking:

A metal label shall be securely attached to each bundle and shall be marked with the following:

AA 109 07, BHEL Order No, Supplier's Name & Grade, Identification No, Size & Weight, Melt No, Packet/Bundle No.

11.0 REFERRED STANDARDS (Latest Publications Including Amendments) :

- | | | |
|--------------|-----------------|--------------|
| 1. IS : 649 | 3. DIN EN 10106 | 5. ASTM A717 |
| 2. IS : 6012 | 4. DIN 50462 | |

GENERAL INFORMATION FOR CALCULATION (NOT TO FORM ACCEPTANCE CRITERION)

- | | | |
|------------------------------------|---|-------------------------|
| - Density | | 7.60 kg/dm ³ |
| - Magnetic Induction (B) | } | |
| at 30,000 A/m (Peak) AC | } | 1.89 Tesla, Min. |
| Magnetic Field Strength (H) (Peak) | } | |
| - Total Specific Loss at 1.0 Tesla | } | 1.25 Watts/kg, Max. |

Mechanical Properties (Typical)

- | | | |
|------------------------------------|---|-----------------------|
| - Tensile strength | } | 510 N/mm ² |
| - Yield strength | } | 380 N/mm ² |
| - Elayation (5.65 $\sqrt{S_0}$ GL) | } | 20% |