

**2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG  
2 X 660 MW NTPC MOUDA STPP STAGE II – SG PKG**

**VOLUME –IIB**

**TECHNICAL SPECIFICATION  
FOR  
PLATE HEAT EXCHANGERS**

**Specification No. : PE-TS-385/387-179-N001 (Rev 0)**



**BHARAT HEAVY ELECTRICALS LIMITED  
POWER SECTOR  
PROJECT ENGINEERING MANAGEMENT  
NOIDA-201301**



**TITLE :**  
**TECHNICAL SPECIFICATION FOR**  
**PLATE HEAT EXCHANGERS**  
**PREAMBLE**

**SPEC. NO.:** PE-TS-385/387-179-N001

**VOLUME** II B

**SECTION**

**REV. NO.** 0

**DATE** 07/09/13

The tender document contains three (3) volumes. The bidder shall meet the requirements of all the three volumes.

**1.1 Volume -I CONDITIONS OF CONTRACT**

This consists of four parts as below:

Volume - I A: This part contains instructions to bidders for making bids to BHEL.

Volume - I B: This part contains general commercial conditions of the tender and includes provision that vendor shall be responsible for the quality of item supplied by their sub-vendors.

Volume - I C: This part contains special conditions of contract.

Volume - I D: This part contains commercial conditions for erection and commissioning site work, as applicable.

**1.2 Volume - II TECHNICAL SPECIFICATIONS** Technical requirements are stipulated in Volume II which comprises of :

Volume - II A: General Technical Conditions

Volume - II B: Technical specification including drawings, if any.

**1.2.1 Volume - II B :** This volume is sub-divided into following sections:

Section – A: This section outlines the scope of enquiry.

Section – B: This section provides “Project Information”

Section – C: This section indicates technical requirements specific to the contract, not covered in Section-D.

Section – D: This section comprises of technical specifications of equipments complete with data sheet A, B & C.

Data sheet-A specifies data and other requirements pertaining to the equipment.

Data sheet - B specifies data to be filled by the bidder (Data Sheet B is contained in Volume - III)

Data sheet - C indicates data documents to be furnished after the award of contract as per agreed schedule by the vendor (as applicable).

**1.2.2 Volume - III: TECHNICAL SCHEDULES -** This volume contains technical schedules and Data Sheets - B, which are to be duly filled by the bidder and the same shall be furnished with the technical bid as per instructions given in Volume-III.

**2.0** The requirements mentioned in Section C/Data Sheets-A of Section-D shall prevail and govern in case of conflict between the same and the corresponding requirements mentioned in the descriptive portion in Section -D



**TITLE :**  
**TECHNICAL SPECIFICATION FOR  
PLATE HEAT EXCHANGERS**

**SPECIFICATION NO. PE-TS-385/387-179-N001**

**VOLUME II B**

**SECTION : -**

**REV. NO. 0**

**DATE : 07.09.13**

**CONTENTS**

<b>SECTION</b>	<b>TITLE</b>
A	SCOPE OF ENQUIRY
B	PROJECT INFORMATION <ul style="list-style-type: none"><li>▪ 2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG</li><li>▪ 2 X 660 MW NTPC MOUDA STPP STAGE II – SG PKG</li></ul>
C	SPECIFIC TECHNICAL REQUIREMENTS
D	STANDARD TECHNICAL SPECIFICATIONS OF PHE'S ALONGWITH <ul style="list-style-type: none"><li>▪ DATA SHEET – A</li><li>▪ DATA SHEET - C</li><li>▪ QUALITY PLAN</li></ul>



TITLE :  
**TECHNICAL SPECIFICATION FOR  
PLATE HEAT EXCHANGERS**

SPECIFICATION NO. PE-TS-385/387-179-N001

VOLUME II B

SECTION A

REV. NO. 0 DATE 07.09.13

SHEET 1 OF 1

1.00.00 **SCOPE**

This enquiry covers the design, manufacture, assembly, inspection and testing at manufacturer's and/ or his sub-contractors works, painting, proper packing & delivery of the item namely **PLATE HEAT EXCHANGERS** complete with all accessories, commissioning spares (if any), counter flanges with nuts, bolts, gaskets and coatings (wherever necessary), including special tools & tackles (if any), including site PG test as mentioned in this specification for the following projects.

2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG  
2 X 660 MW NTPC MOUDA STPP STAGE II – SG PKG

2.00.00 **GENERAL TECHNICAL INSTRUCTIONS**

2.01.00 It is not the intent to specify herein all the details of design and manufacture. However the equipment shall conform in all respects to high standards of design, engineering and workmanship, and shall be capable of performing the required duties in a manner acceptable to Engineer/ Owner, who will interpret the meaning of drawing and specifications, and shall be entitled to reject any component or material, which in his judgement is not in full accordance herewith.

2.02.00 The omission of specific reference to any component/ accessories necessary for the proper performance of Plate Heat Exchangers shall not relieve the bidder of the responsibility of providing such facilities to complete the supply of heat exchangers at quoted prices.

2.03.00 Design/ drawings/ data sheets etc. shall be subject to approval of BHEL as per specification, in the event of order.

2.04.00 BHEL's / customer's representative shall be given access to the shop in which the equipment are being manufactured or tested and all test records shall be made available to him.

2.05.00 The equipment covered under this specification shall not be despatched unless the same have been finally inspected, accepted and shipping release issued by BHEL.



**TITLE :**  
**TECHNICAL SPECIFICATION FOR**  
**PLATE HEAT EXCHANGERS**

**SPECIFICATION NO. PE-TS-385/387-179-N001**


**VOLUME II B**


**SECTION C**


**REV. NO. 0**

**DATE 07.09.13**


**SECTION B**  
**PROJECT INFORMATION**


CLAUSE NO.	PROJECT INFORMATION STG AND SG PKG			
1.00.00	<p><b>BACKGROUND</b></p> <p>Mouda STPP Stage-I comprising of two units of 500 MW each is presently under implementation. Now in view the huge power generation capacity requirement and future capacity addition plans, it is proposed to enhanced capacity of Mouda STPP. The present proposal is to install additional two units of 660 MW in Stage-II this making the ultimate capacity of the project to 2320 MW.</p>			
1.01.00	<p><b>LOCATION AND APPROACH</b></p> <p>The plant site is located in Mouda Tehsil, district Nagpur of Maharashtra Stage, having latitude and longitude of 20° 10'50" N and 79° 23'52" E respectively. The site is bounded by villages Kumbhari on North, Lapka &amp; Mouda on South, Koradi on East &amp; Rahli on West and is at a distance of about 4 Kms. From Mouda town and approachable from NH-6. Nearest railway station is Chacker 8 Kms away from site on Nagpur – Kolkata Broad Gauge (BG) section of South Eastern Railway (main line). The nearest commercial airport is at Nagpur located at a distance of approximately 42 Kms form the project site.</p> <p>Vicinity Plan is enclosed as <b>Annexure – I</b></p> <p>For further information apart from given in this sub-section and Bidders are also advised to visit the project site and collect data regarding local site conditions.</p>			
1.02.00	<p><b>LAND</b></p> <p>For Stage-I of Mouda project, about 1580 acres of land required for the project is acquired/under acquisition.</p> <p>About 125 acres of additional land for plant and 50 acres for Township required. The same has been identified contiguous to existing plant and township areas. The township is to be located in North West of the plant area and on Mouda – Ramtek road, 6 kms away from Mouda town. No major problem anticipated in acquisition as per site visit and discussions with State Govt. officials.</p> <p>About 550 acres of land is required for ash disposal. Alternatives suggested by Mouda site visited on 09.07.09 and the land near Kirnapur &amp; Kpra villages have been finalized. In principle land availability for Mouda Stage-II has been obtained from Office of the Collector, Nagpur vide letter ref. No. Desk-17/Resettlement/T-1/w.s. 323/09 dated 27.08.09.</p>			
1.03.00	<p><b>WATER</b></p> <p>Make up water requirement for Stage-II of this project would be about <b>4800 m<sup>3</sup>/hr.</b> Water requirement for the project will be met from pondage created on river Wain Ganga/ Kanhan by construction of dam near Gosikhurd by Govt. of Maharashtra. Make-up water shall be drawn from above mentioned source and shall be pumped to the raw water reservoir located about 24 Kms from intake well.</p> <p>Maharashtra Government has approved the reservation of 100 MCM water including the evaporation losses for NTPC in Goshikhurd Project for the ultimate stage of the project (Stage-I 2x500 MW) + Stage-II (2x660 MW). Ministry of Industries, Energy and Labour Department, Government of Maharashtra vide letter dated 10.12.2002 has given in principle consent for making available the required water for the Mouda project.</p>			
MOUDA SUPER THERMAL POWER PROJECT STAGE-II (2X660 MW) STEAM GENERATOR PACKAGE STEAM TURBINE GENERATOR PKG.		TECHNICAL SPECIFICATION SECTION-VI BID DOC. NO. : CS-9575/9571/0360/0370/9586-102-2	PART-A SUB SECTION-II PROJECT INFORMATION	PAGE 1 OF 17

CLAUSE NO.	PROJECT INFORMATION										
1.04.00	<p><b>Railway Siding</b></p> <p>Employer intends to construct the railway siding to project site from the nearest existing railway line. However the same may not be available to the bidder for his use to transport equipment and material.</p> <p>Bidder may visit the site and acquaint themselves with the facilities available.</p>										
1.05.00	<p><b>COAL AVAILABILITY AND TRANSPORTATION</b></p> <p><b>Coal Availability</b></p> <p>Raw coal is proposed as fuel. The annual coal requirement would be about of 7.5 MTPA for 2X660 MW of Mouda STPP Stage-II.</p> <p>Likely coal source for the expansion project is similar to Mouda TPP Stage-I. The matter has been taken up with Ministry of Coal, Govt. of India for Long Term Coal Linkage.</p> <p><b>Coal Transportation</b></p> <p>Coal is proposed to be transported through Indian Railways network.</p>										
1.06.00	<p><b>Coal Quality Parameters / Fuel Oil Characteristics</b></p> <p>The coal quality parameters and Fuel oil Characteristics are attached at SUB-SECTION-V, PART-A.</p>										
1.07.00	<p><b>Capacity</b></p> <table border="0"> <tr> <td>Stage-I</td> <td>:</td> <td>2x500 MW</td> <td>Under Construction / Implementation</td> </tr> <tr> <td>Stage-II</td> <td>:</td> <td>2x660 MW</td> <td>Present proposal</td> </tr> </table>	Stage-I	:	2x500 MW	Under Construction / Implementation	Stage-II	:	2x660 MW	Present proposal		
Stage-I	:	2x500 MW	Under Construction / Implementation								
Stage-II	:	2x660 MW	Present proposal								
1.08.00	<p><b>Construction Power</b></p> <p>The requirements of the construction power supply for the project would be met from the existing 11 kV Miscellaneous Switchgear located near 132 KV switchyard. Necessary 11 kV ring main/LT sub-stations shall be provided for the required power plant area.</p>										
1.09.00	<p><b>Metrological Data</b></p> <p>The metrological data from nearest observatory is placed at <b>Annexure-II</b>.</p>										
1.10.00	<p><b>Plant Water Scheme</b></p> <p>The Plant water scheme is described below.</p>										
1.10.01	<p><b>Condenser Cooling (CW) Water System</b></p> <p>It is proposed to provide recirculating type CW system with induced draft type cooling towers. For the recirculating type CW system it is proposed to supply clarified water as make up. Raw water from the make-up water pump house shall be pumped to a Water Pretreatment Plant (PT - CW system). The treated clarified water shall be led to the cold water channel of CW system. CW system shall be operated at a C.O.C of about 4 . Chemical treatment programme (using acid dosing and scale cum corrosion inhibitors dosing) may be employed in addition to blow down of CW water to control the CW system chemistry in case CW system is required to be operated beyond 4COC. The expected circulating water analysis is</p>										
MOUDA SUPER THERMAL POWER PROJECT STAGE-II (2X660 MW) STEAM GENERATOR PACKAGE STEAM TURBINE GENERATOR PKG.		TECHNICAL SPECIFICATION SECTION-VI BID DOC. NO. : CS-9575/9571/0360/0370/9586-102-2	PART-A SUB SECTION-II PROJECT INFORMATION PAGE 2 OF 17								

CLAUSE NO.	PROJECT INFORMATION 		
1.10.02	<p>given in this sub-section <b>Annexure-III</b>. CW blow down shall be drawn from the discharge of CW pumps and the same shall be led to a Service water Tank. For carrying circulating water from CW pump house to TG-area and from TG area to cooling tower, steel lined concrete encased duct would be provided. For interconnecting CW duct with CW pump, condenser and cooling towers, steel pipes would be used. Cooled water from cooling tower will be led to CW pump house through the cold water channel by gravity.</p> <p><b>Equipment Cooling Water (ECW) System (Unit Auxiliaries)</b></p> <p>The plant auxiliaries of Steam Generator and Turbine Generator shall be cooled by Demineralized (DM) water in a closed circuit. The primary circuit DM water shall be cooled through plate type heat exchangers by Circulating Water tapped from CW system in a closed secondary circuit. The hot secondary circuit cooling water shall be cooled in the cooling towers and shall be returned back to the system. It is proposed to provide independent primary cooling water circuit for Steam Generator &amp; auxiliaries and TG &amp; its auxiliaries.</p>		
1.10.03	<p><b>Station Auxiliaries Cooling Water System</b></p> <p>The station auxiliaries such as Air compressors, Compressors of ash handling plant, Cooling water circuit of Air Conditioning system, compressor of mill reject system etc. shall be cooled by separate cooling water System using separate set of pumps and cooling towers.</p>		
1.10.04	<p><b>Ash Water System</b></p> <p>Gland sealing are provided in necessary LP &amp; HP water pumps, flushing water pumps &amp; seal water pumps for slurry disposal pump .</p>		
1.10.05	<p><b>Other Miscellaneous Water Systems</b></p>		
	<p>a) CW system blow down water shall be used for the plant service water requirement, dust suppression system of coal handling plant, ash slurry pumps sealing, sealing of Vacuum pumps (if applicable) of Ash Handling plant, make-up to fire water storage tanks and cooling water requirement of hydrogen generation plant. The service (wash water) water collected from various areas shall be treated using oil water separators, tube settlers, coal settling pits etc. as per requirement and treated water from liquid effluent treatment plant shall be recycled back to the service water system for re-use. The excess service water shall be led to central monitoring basin for disposal.</p> <p>b) Separate water Pre-treatment plants are proposed for Circulating Water (PT-CW) system, Demineralization Plant (PT-DM) plant.</p> <p>c) The drinking water requirement of the plant and colony shall be provided from the above mentioned Water (PT- CW) pretreatment plant.</p> <p>d) Steam Cycle make-up water, makeup to the primary circuit of ECW (unit auxiliaries) system, boiler fill water and makeup to the hydrogen generation plant shall be provided from Dematerializing plant.</p> <p>e) The quality of cooling water &amp; DM water is given in this sub-section as <b>Annexure-III &amp; IV</b> respectively.</p>		
1.11.00	<p><b>Criteria for Earthquake Resistant Design of Structures and Equipment</b></p> <p>All power plant structures and equipment, including plant auxiliary structures and equipment shall be designed for seismic forces as given in this sub-section as <b>Annexure-V</b>.</p>		
MOUDA SUPER THERMAL POWER PROJECT STAGE-II (2X660 MW) STEAM GENERATOR PACKAGE STEAM TURBINE GENERATOR PKG.		TECHNICAL SPECIFICATION SECTION-VI BID DOC. NO. : CS-9575/9571/0360/0370/9586-102-2	PART-A SUB SECTION-II PROJECT INFORMATION PAGE 3 OF 17



CLAUSE NO.	PROJECT INFORMATION			
1.12.00	<p><b>Criteria for Wind Resistant Design of Structures and Equipment</b></p> <p>All structures and equipment of the power plant, including plant auxiliary structures and equipment, shall be designed for wind forces as given as given in this sub-section as <b>Annexure-VI</b>.</p>			
MOUDA SUPER THERMAL POWER PROJECT STAGE-II (2X660 MW) STEAM GENERATOR PACKAGE STEAM TURBINE GENERATOR PKG.		TECHNICAL SPECIFICATION SECTION-VI BID DOC. NO. : CS-9575/9571/0360/0370/9586-102-2	PART-A SUB SECTION-II PROJECT INFORMATION	PAGE 4 OF 17

CLAUSE NO.	PROJECT INFORMATION	<div>एन टी सी NTPC</div>	
	ANNEXURE-I		
			
MOUDA SUPER THERMAL POWER PROJECT STAGE-II (2X660 MW) STEAM GENERATOR PACKAGE STEAM TURBINE GENERATOR PKG.	TECHNICAL SPECIFICATION SECTION-VI BID DOC. NO. : CS-9575/9571/0360/0370/9586-102-2	PART-A SUB SECTION-II ANNEXURE-I	PAGE 5 OF 17



CLAUSE NO.

PROJECT INFORMATION



Annexure-II

जलवायवी सारणी CLIMATOLOGICAL TABLE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
स्टेशन : नागपुर (सोनेगाव) STATION : Nagpur (Sonegaon)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
अक्षांश LAT 21°06' N																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
देशांतर LONG 79°03' E																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
समुद्री तल मम से ऊँचाई HEIGHT ABOVE M.S.L.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
310 METRES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
मंदर																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
1951 से 1980 तक के प्रेक्षणों पर आधारित BASED ON OBSERVATIONS FROM 1951 TO 1980																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
माह	स्टेशन का स्तर याव	रूक बल	नम बल	दैनिक अधिकतम	दैनिक न्यूनतम	माह में उच्चतम	माह में निम्नतम	दिनांक और वर्ष	दिनांक और वर्ष	सापेक्ष आर्द्रता	आर्द्रता	वायु दाब	समुद्र तल से ऊँचाई	वर्ष के सबसे कम शुष्कता माहों का माहों का सबसे पारी वर्ष																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
															वायु तापमान																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
															AIR TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
MONTH	STATION LEVEL PRESSURE	DRY BULB	WET BULB	DAILY MAX	DAILY MIN	HIGHEST IN THE MONTH	LOWEST IN THE MONTH	DATE AND YEAR	DATE AND YEAR	RELATIVE HUMIDITY	VAPOUR PRESSURE	HUMIDITY	CLOUD AMOUNT	TOTAL IN MONTH WITH YEAR																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
															सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.	सं. फो. प.

CLAUSE NO.


PROJECT INFORMATION



जलवायु की सारणी  
CLIMATOLOGICAL TABLE

स्टेशन नागपुर (सोनेगांव)  
STATION : Nagpur (Sonegaon)

सैलम जलपट्टा		धन		भेष		दूरवा	
के साथ दिनों की संख्या		पवन की गति के साथ दिनों की संख्या (कि.मी. प. घं.)		पवन की दिशा के दिनों की संख्या का प्रतिशत		दिन खरी देव नखा सहित दिनों की संख्या - अनुपस्थिति	
वर्ष	दिनांक	वर्ष	दिनांक	वर्ष	दिनांक	वर्ष	दिनांक
62	20-1-19	62	20-1-19	62	20-1-19	62	20-1-19
63	20-1-19	63	20-1-19	63	20-1-19	63	20-1-19
64	20-1-19	64	20-1-19	64	20-1-19	64	20-1-19
65	20-1-19	65	20-1-19	65	20-1-19	65	20-1-19
66	20-1-19	66	20-1-19	66	20-1-19	66	20-1-19
67	20-1-19	67	20-1-19	67	20-1-19	67	20-1-19
68	20-1-19	68	20-1-19	68	20-1-19	68	20-1-19
69	20-1-19	69	20-1-19	69	20-1-19	69	20-1-19
70	20-1-19	70	20-1-19	70	20-1-19	70	20-1-19
71	20-1-19	71	20-1-19	71	20-1-19	71	20-1-19
72	20-1-19	72	20-1-19	72	20-1-19	72	20-1-19
73	20-1-19	73	20-1-19	73	20-1-19	73	20-1-19
74	20-1-19	74	20-1-19	74	20-1-19	74	20-1-19
75	20-1-19	75	20-1-19	75	20-1-19	75	20-1-19
76	20-1-19	76	20-1-19	76	20-1-19	76	20-1-19
77	20-1-19	77	20-1-19	77	20-1-19	77	20-1-19
78	20-1-19	78	20-1-19	78	20-1-19	78	20-1-19
79	20-1-19	79	20-1-19	79	20-1-19	79	20-1-19
80	20-1-19	80	20-1-19	80	20-1-19	80	20-1-19
81	20-1-19	81	20-1-19	81	20-1-19	81	20-1-19
82	20-1-19	82	20-1-19	82	20-1-19	82	20-1-19
83	20-1-19	83	20-1-19	83	20-1-19	83	20-1-19
84	20-1-19	84	20-1-19	84	20-1-19	84	20-1-19
85	20-1-19	85	20-1-19	85	20-1-19	85	20-1-19
86	20-1-19	86	20-1-19	86	20-1-19	86	20-1-19
87	20-1-19	87	20-1-19	87	20-1-19	87	20-1-19
88	20-1-19	88	20-1-19	88	20-1-19	88	20-1-19
89	20-1-19	89	20-1-19	89	20-1-19	89	20-1-19
90	20-1-19	90	20-1-19	90	20-1-19	90	20-1-19
91	20-1-19	91	20-1-19	91	20-1-19	91	20-1-19
92	20-1-19	92	20-1-19	92	20-1-19	92	20-1-19
93	20-1-19	93	20-1-19	93	20-1-19	93	20-1-19
94	20-1-19	94	20-1-19	94	20-1-19	94	20-1-19
95	20-1-19	95	20-1-19	95	20-1-19	95	20-1-19
96	20-1-19	96	20-1-19	96	20-1-19	96	20-1-19
97	20-1-19	97	20-1-19	97	20-1-19	97	20-1-19
98	20-1-19	98	20-1-19	98	20-1-19	98	20-1-19
99	20-1-19	99	20-1-19	99	20-1-19	99	20-1-19
100	20-1-19	100	20-1-19	100	20-1-19	100	20-1-19

CLAUSE NO.	PROJECT INFORMATION																																										
	<div>Annexure – III</div> <div>COOLING WATER ANALYSIS</div> <table><thead><tr><th>Constituent</th><th>as</th><th>mg per litre</th></tr></thead><tbody><tr><td>Calcium</td><td>CaCO<sub>3</sub></td><td>407</td></tr><tr><td>Magnesium</td><td>CaCO<sub>3</sub></td><td>250</td></tr><tr><td>Sodium &amp; Potassium</td><td>CaCO<sub>3</sub></td><td>175</td></tr><tr><td>Cations</td><td>CaCo3</td><td>832</td></tr><tr><td>Bicarbonates</td><td>CaCO<sub>3</sub></td><td>516</td></tr><tr><td>Chloride</td><td>CaCO<sub>3</sub></td><td>162</td></tr><tr><td>Sulphate</td><td>CaCO<sub>3</sub></td><td>154</td></tr><tr><td>Anions</td><td>CaCO<sub>3</sub></td><td>832</td></tr><tr><td>Silica</td><td>SiO<sub>2</sub></td><td>50</td></tr><tr><td>Iron</td><td>Fe</td><td>&lt; 0.8</td></tr><tr><td>pH Value</td><td>-</td><td>8.4</td></tr><tr><td>TSS</td><td>mg/l</td><td>&lt; 25</td></tr></tbody></table> <p><b>Note :</b> The C.W system is expected to operate at about 4.0 Cycles of Concentration.</p>				Constituent	as	mg per litre	Calcium	CaCO <sub>3</sub>	407	Magnesium	CaCO <sub>3</sub>	250	Sodium & Potassium	CaCO <sub>3</sub>	175	Cations	CaCo3	832	Bicarbonates	CaCO <sub>3</sub>	516	Chloride	CaCO <sub>3</sub>	162	Sulphate	CaCO <sub>3</sub>	154	Anions	CaCO <sub>3</sub>	832	Silica	SiO <sub>2</sub>	50	Iron	Fe	< 0.8	pH Value	-	8.4	TSS	mg/l	< 25
Constituent	as	mg per litre																																									
Calcium	CaCO <sub>3</sub>	407																																									
Magnesium	CaCO <sub>3</sub>	250																																									
Sodium & Potassium	CaCO <sub>3</sub>	175																																									
Cations	CaCo3	832																																									
Bicarbonates	CaCO <sub>3</sub>	516																																									
Chloride	CaCO <sub>3</sub>	162																																									
Sulphate	CaCO <sub>3</sub>	154																																									
Anions	CaCO <sub>3</sub>	832																																									
Silica	SiO <sub>2</sub>	50																																									
Iron	Fe	< 0.8																																									
pH Value	-	8.4																																									
TSS	mg/l	< 25																																									
MOUDA SUPER THERMAL POWER PROJECT STAGE-II (2X660 MW) STEAM GENERATOR PACKAGE STEAM TURBINE GENERATOR PKG.		TECHNICAL SPECIFICATION SECTION-VI BID DOC. NO. : CS-9575/9571/0360/0370/9586-102-2	PART-A SUB SECTION-II ANNEXURE-III	PAGE 8 OF 17																																							



**TITLE :**  
**TECHNICAL SPECIFICATION FOR**  
**PLATE HEAT EXCHANGERS**

**SPECIFICATION NO. PE-TS-385/387-179-N001**

**VOLUME II B**

**SECTION C**

**REV. NO. 0**

**DATE 07.09.13**

**SECTION C**  
**SPECIFIC TECHNICAL REQUIREMENTS**



**TITLE :**  
**TECHNICAL SPECIFICATION FOR**  
**PLATE HEAT EXCHANGERS**

**SPECIFICATION NO. PE-TS-385/387-179-N001**

**VOLUME II B**

**SECTION C**

**REV. NO. 0**

**DATE 07.09.13**

**1.0 GENERAL :**

The Plate heat Exchangers complete with all accessories including special tools and tackles (if any) shall conform to the standard technical specifications and Data Sheet-A of Section-D. In addition, the requirements of this Section C shall also be complied with. However, wherever the details given in Section-D and Data Sheet-A are different, the requirements of Data Sheet - A shall prevail. Similarly in the event of contradictions between Section - C & Section - D/ Data Sheet-A, Section-C shall prevail.

Number of Plate Heat Exchangers to be supplied shall be as under:

- Total Six (6) nos. PHE for 2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG  
Viz. 3 nos [2W + 1S] per Unit
- Total Four (4) nos. PHE for 2 X 660 MW NTPC MOUDA STPP STAGE II – SG PKG  
viz. 2 nos [1W + 1S] per Unit

**2.0 SYSTEM DESCRIPTION :**

**2.1** The Plate Heat Exchanger are intended to be used in closed circuit DM cooling water circuit for Cooling Hot passivated DM Water by Auxiliary Cooling Water (Clarified Water) in case of following Projects:

1. 2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG
2. 2 X 660 MW NTPC MOUDA STPP STAGE II – SG PKG

**2.2** Passivated DM Water is circulated through various auxiliary coolers of TG & Boiler, in closed loop by means of pumps. This DM water picks up heat from different cooling equipment's. Heat from DM water is transferred to auxiliary cooling water (Secondary side) thru' the Plate Heat Exchangers covered under this specification.

**2.3** The analysis of DM Water, Clarified Water (Auxiliary cooling water) to be handled by the Plate Heat Exchangers are given in Data Sheet-A.

**2.4** A strainer of 2 mm size at ACW inlet lines of PHE is provided and backwashing of PHE's is not envisaged.

**3.0 SCOPE OF SUPPLY :**

**3.1** Number of Plate Heat Exchangers to be supplied shall be as under. For design parameters etc. refer Data Sheet-A enclosed herewith.

**3.1.1** For 2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG  
Total Six (6) nos . PHE Viz. 3 nos [2W + 1S] per Unit

**3.1.2** For 2 X 660 MW NTPC MOUDA STPP STAGE II – SG PKG  
Total Four (4) nos.PHE viz. 2 nos [1W + 1S] per Unit

**3.2** Each Plate Heat Exchanger (quantity and other details specified in Data Sheet-A) shall be complete with the following accessories and auxiliaries.

- (i) Suitable drain and vent connections for both primary (DMCW) and Secondary Water (Clarified Water) streams complete with isolation valves.





**TITLE :**  
**SPECIFIC TECHNICAL REQUIREMENTS**  
**FOR**  
**PLATE HEAT EXCHANGERS**

**SPECIFICATION NO. PE-TS-385/387-179-N001**

**VOLUME II B**

**SECTION C**

**REV. NO. 0** | **DATE 07.09.13**

- (ii) Supporting arrangement complete with foundation plate channels, anchor bolts, nuts, sleeves, inserts etc.
- (iii) Lifting arrangement i.e., lifting lugs, eye bolts etc.
- (iv) Matching counter flanges with necessary bolts, nuts, and gaskets for all flanged terminal points, including for DMCW and ACW inlet/outlet nozzles.
- (v) Other accessories as required to make PHE's complete in all respects.
- (vi) Commissioning spares, if any.
- (vii) One Ratchet spanner per PHE is included in bidder's scope of supply .
- (viii) Matching piece (Reducer/Expander), with coatings (as required), to match the PHE nozzle connection with connecting pipe size as indicated in Data Sheet.
- (ix) Mandatory spares as applicable for each project as per data sheet A.

**3.3** Finish paints for touch-up painting of equipment after erection at site in sealed containers.

**3.4** Various drawings, datasheets, test reports/ certificates, instruction manuals for erection, operation and maintenance etc., as specified in Data Sheet-C.

**3.5** Based on the layout requirement, the nozzle orientation shall be for parallel flow viz. The inlet and outlet of DMCW flow shall be on the same side (vertically). And also the inlet and outlet of ACW flow shall be on same side (vertically).

#### **4.0 INSPECTION REQUIREMENTS**

**4.1** Inspection for "pressing of plates to form whole corrugation of the heat transfer plate" shall be from third party like TUV/Lloyd and certificate shall be submitted for review of BHEL.

For 2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG the pressing of plates to form whole corrugation of the heat transfer plate shall be carried out in one operation.

**4.2** DP Test shall be conducted for 10% of HT plates.

BHEL envisage witness of D.P. Test as follows:

- a. 1% witness by Customer.
- b. 2% witness by BHEL.

However during Contract Stage above percentage may vary from 1% to 10% for Customer & from 2% to 10% for BHEL without any commercial implication. However, in case of defect, entire lot shall be tested & only defect free plates shall be accepted.

**4.3** 10% of Light Box test or equivalent test (Vacuum test / Air Chamber test ) shall be witnessed by BHEL/Customer/Third party (TUV/Lloyd or equivalent). However during Contract stage above percentage may vary from 10 to 100 % for BHEL/Customer without any cost implication to BHEL.

**4.4** Minimum requirement for quality Plan shall be as per quality plan attached in the Section D of the Vol. IIB. Manufacturing Quality Plan for PHE shall be subject to approval during detail engineering. No price implication shall be admissible to QP approval by BHEL/Customer.

**4.5** Hydraulic test for PHE's shall be performed at 1.5 times the design pressure with 30 minutes holding time for each side as per quality plan attached in the Section D of the Vol. IIB.

**4.6** 100% PMI Inspection for material grade of PHE Heat Transfer plates shall be from third party like TUV/Lloyd & certificate shall be submitted for review of BHEL.

**4.7** BHEL reserves the right to conduct random & independent PMI inspection on PHE's Heat Transfer plates to ascertain the plate material.





**TITLE :**  
**SPECIFIC TECHNICAL REQUIREMENTS  
FOR  
PLATE HEAT EXCHANGERS**

**SPECIFICATION NO. PE-TS-385/387-179-N001**

**VOLUME II B**

**SECTION C**

**REV. NO. 0 DATE 07.09.13**

- 4.8** Heat transfer area for the PHE as offered by bidder with technical offer shall be measured by White light scanning method during contract stage to ascertain the correctness of heat transfer area as offered by bidder.

Inspection of plate area measurement for one heat transfer plate per PHE by White Light Scanning shall be from third party like TUV/Lloyd , same shall also be witnessed by BHEL. No type test certificates are acceptable to BHEL for same.

Bidder shall furnish the procedure for White Light Scanning method during detailed engineering viz. after award of contract which shall be subjected to BHEL/Customer approval. The Minimum requirement for White Light Scanning procedure is as per the Annexure-A of the quality plan attached in the Section D of the Vol. IIB.

Bidder to note that Heat Transfer Area measured by White Light Scanning during contract stage should not have negative tolerance more than 3% w.r.t to the heat transfer area indicated by bidder against the offered model of PHE. However in the case of negative tolerance (limited to maximum 3 percent) , bidder has to provide additional plates proportionately, as free issue, assembled into all the applicable PHE's before the Final inspection and "As built Certificate" shall be issued by the bidder accordingly. Bidder to note that negative tolerance beyond three percent shall not be accepted, however no credit shall be given to the bidder for positive tolerance of the plate area measurement.

**5.0 PERFORMANCE GUARANTEE AND TESTING:**

- 5.1** The PHE shall be guaranteed to meet the performance requirements specified in Section-D and also for trouble free operation after commissioning. Schedule of performance guarantees (enclosed in Volume-III) duly filled and signed shall be furnished with the bid.
- 5.2** After commissioning of PHE's at site, performance test of all PHE's for each unit individually will be conducted by bidder at project site to ensure that the PHE's meet the specified requirements. In case of any deficiency, the vendor shall rectify the same at site with no additional cost to BHEL. All duly calibrated instruments required for PG testing including for flow measurements shall be arranged by the bidder and taken back after the Test. The computation of flow by characteristics curve of Pumps for PG Testing of PHE's shall not be permitted.
- 5.3** It is clarified that pressure gauges and temperature gauges are provided at each PHE inlet / outlet on both primary / secondary sides and bidder can install their calibrated instruments on these locations. It is further clarified that due to layout constraints flow measuring instruments installation on pipe is not feasible. Bidder shall arrange the Ultra-sonic flow meter / similar type of instrument for PG testing.
- 5.4** At the time of performance testing, cleaning of the plates (if required) and instruments like pressure gauges, temp. gauges, flow measuring instruments etc. shall be arranged by the bidder and no instruments shall be provided by BHEL for performance testing.



**TITLE :**  
**SPECIFIC TECHNICAL REQUIREMENTS**  
**FOR**  
**PLATE HEAT EXCHANGERS**

**SPECIFICATION NO. PE-TS-385/387-179-N001**

**VOLUME II B**

**SECTION C**

**REV. NO. 0** **DATE 07.09.13**

**6.0 SPARES :**

**6.1 Mandatory Spares:** Shall be as per data sheet A,

**7.0 DOCUMENTS TO BE SUBMITTED ALONG WITH OFFER:**

No document other than the following is required to be submitted by bidder with the offer unless bidder considers it absolutely necessary.


- a) Compliance certificate as enclosed in Volume III
- b) Schedule of Deviations if any.
- c) Guarantee Schedule.
- d) Schedules of Price & Unit Price for each project.
- e) GA Drg. of PHE indicating all-important details for Layout purpose, withdrawal space required for plates, weight of assembly, nozzle & matching piece details etc.
- f) Confirmation of plate area of the offered model, duly endorsed from the Head of Engg./R&D of Principal supplier of the plate.
- g) Schedule of declaration.

**7.1** Other Drawings/ documents as per Data Sheet-C, etc shall be submitted by successful bidder after the award of contract as per the distribution schedule

**8.0 EXCLUSIONS :**

The following are excluded from the bidder's scope:

- 8.1** Civil foundation works required for installation of the heat exchangers.
- 8.2** Piping, valves etc., on the external circuit of both primary and secondary water streams.
- 8.3** Erection & Commissioning of equipment at site.



**TITLE:**

**STANDARD TECHNICAL  
SPECIFICATION FOR PLATE HEAT  
EXCHANGERS**

**SPECIFICATION NO. PE-TS-385/387-179-N001**

**VOLUME: II B**


**SECTION: D**

**REV: 04**

**DATE: 07.09.13**

**SHEET: 1 OF 8**

**SECTION - D  
PLATE HEAT EXCHANGER  
STANDARD TECHNICAL SPECIFICATION  
DATA SHEET A & C  
STANDARD QUALITY PLAN**

	<b>TITLE :</b>	<b>SPECIFICATION NO.</b> PE-TS-MOU-179-N001
	<b>TECHNICAL SPECIFICATION</b>	<b>VOLUME :</b> II B
	<b>FOR PLATE HEAT EXCHANGERS</b>	<b>SECTION :</b>
	<b>(FOR MEMORANDUM OF</b>	<b>REV. NO.</b> 0 <b>DATE :</b> 15.06.12
	<b>UNDERSTANDING PURPOSE)</b>	<b>SHEET</b> Page 2 of 8

## 1.00.01 GENERAL

This specification covers the Design, Performance requirements, Constructional Features, Materials requirements, manufacture, assembly, Inspection and Testing at Manufacturer's and/ or his subcontractor's works and Painting requirements for delivery of Plate Heat Exchanger complete with all accessories as specified herein-after.

## 2.00.00 CODES AND STANDARDS:

2.01.00 The design, manufacture and testing of the plate heat exchanger complete with all accessories, shall generally conform to the latest editions of the following appropriate standards.

2.01.01 IS/BS/DIN/US Standards regarding pressure vessels, pressure piping, pipes, valves, flanges and other as necessary.

2.01.02 IS/ BS/ DIN/ ASTM for material specification and testing procedures.


2.02.00 In case of any conflict between the above codes/ standards and this specification, the latter shall prevail and in case of any further conflict in the matter, the interpretation of the specification by the Engineer shall be final and binding

## 3.00.00 DESIGN AND CONSTRUCTION:

### 3.01.00 General Requirements:

3.01.01 Unless otherwise necessary, manufacture's standard and proven models of the plate heat exchanger shall be supplied.

3.01.02 The equipment shall be capable of safe, proper and continuous operation at all heat loads and water from up to those corresponding to the operating conditions mentioned in Data Sheet – A furnished a/w project enquiry. Vibration, noise, mechanical and thermal stresses shall be kept

	TITLE :	SPECIFICATION NO. PE-TS-MOU-179-N001
	TECHNICAL SPECIFICATION	VOLUME : II B
	FOR PLATE HEAT EXCHANGERS	SECTION :
	(FOR MEMORANDUM OF	REV. NO. 0 DATE : 15.06.12
	UNDERSTANDING PURPOSE)	SHEET Page 3 of 8

within allowable units specified by relevant codes/ standards in design. Due attention shall be given to *case of maintenance, repair and cleaning*.

3.01.03 Suitable corrosion allowance shall be provided wherever necessary. The corrosion allowance for the heat exchanger parts such as pressure plates (support plates), nozzles, sliding channels and frame shall be 1.6 mm (minimum).

3.01.04 Each heat exchanger shall be capable of passing a flow of at least 1.1 times the design flow rate on both primary and secondary water sides. Bidder shall indicate maximum pressure drop through the heat exchanger under this condition.

3.01.05 For the purpose of calculating dirty overall heat transfer coefficient, a total fouling factor as given in Data Sheet-A furnished a/w project enquiry shall be assumed. It is expected that the cleaning frequency shall be once in a year with the above fouling factor.

3.01.06 No back wash for the heat exchangers is envisaged.

### 3.02.00 Performance Requirements:

3.02.01 The pressure drop across plate heat exchanger from inlet to outlet in fouled conditions for primary and secondary sides, shall not be more than those specified in Data Sheet-A furnished a/w project enquiry, for the specified flow rates.

3.02.02 For the specified flow rate and inlet temperature, the primary side (hot fluid) outlet temperature shall not be more than that specified in Data Sheet-A furnished a/w project enquiry.

3.02.03 In the event of failure to meet the above stipulated performance requirements, the equipment will be out rightly rejected.

### 3.03.00 Construction of Heat Exchanger:

3.03.01 Heat transfer plates shall be packed in a frame consisting of fixed frame plate and movable pressure plate and aligned at top and bottom of carrying bars. Design shall be such that cleaning is possible without dismantling the piping.

	<b>TITLE :</b>	<b>SPECIFICATION NO.</b> PE-TS-MOU-179-N001
	<b>TECHNICAL SPECIFICATION</b>	<b>VOLUME :</b> II B
	<b>FOR PLATE HEAT EXCHANGERS</b>	<b>SECTION :</b>
	<b>(FOR MEMORANDUM OF</b>	<b>REV. NO.</b> 0 <b>DATE :</b> 15.06.12
	<b>UNDERSTANDING PURPOSE)</b>	<b>SHEET</b> Page 4 of 8

3.03.02 Heat transfer plates shall be sealed at their outer edges and around the ports by gaskets in order to prevent leakage and inter-mixing of fluids.

Double sealing arrangement shall be provided at outer edge and around ports. The inter space between the seals shall be vented to atmosphere in order to avoid inter-mixing of liquids in case of gaskets failure.

The gasket arrangement shall be such that it receives continuous support to ensure a long gasket life. The gasket should be able to retain their properties and shape over a life period of 10 years.

3.03.03 Heat transfer plates shall be provided with sufficient thickness in order to impart sufficient rigidity to the plates particularly from handling considerations. Plates shall have contact points in order to provide inter-plate supports. The recesses on the plates are suitably strengthened by a reinforcement plate.


Plate thickness shall be adequate to withstand all operating conditions as specified in data sheet A furnished a/w project enquiry.. Flanges shall be as per ANSI 16.5 or equivalent. Thickness of pressure and frame plates shall be as per ASME Sect. VIII div.1.25% extra capacity for additional plates shall be provided in frame.

Each Plate shall be numbered in sequence. The number shall be marked by indelible ink on the plate to permit easy reassembly. The plates shall be pressed from one piece. They shall be pressed in single/ progressive manner.

The corrugation shall be smooth, uniform and identical for every plate. The PHE bottom frame plate and support should have fixing lugs and cleats to keep provision for enabling to fit trough with outlet nozzle fitted underneath to collect and drain out water in the event of leakages.

3.03.04 Frame for each heat exchanger shall have extra capacity to accommodate the additional plates, if required in future because of any reason whatsoever. The extra capacity to be provided is indicated in Data Sheet-A furnished a/w project enquiry.

The upper carrying bar and lower guide bar shall be rigid in construction

	<b>TITLE :</b>	<b>SPECIFICATION NO.</b> PE-TS-MOU-179-N001
	<b>TECHNICAL SPECIFICATION</b>	<b>VOLUME :</b> II B
	<b>FOR PLATE HEAT EXCHANGERS</b>	<b>SECTION :</b>
	<b>(FOR MEMORANDUM OF</b>	<b>REV. NO.</b> 0 <b>DATE :</b> 15.06.12
	<b>UNDERSTANDING PURPOSE)</b>	<b>SHEET</b> Page 5 of 8

without any risk of sagging or buckling, and shall facilitate easy guiding of the plates.

3.03.05 All inlet, outlet and other nozzles shall be flanged type and shall be as specified in Data Sheet-A. Counter flanges complete with gaskets, bolts, nuts and coatings (wherever necessary) shall be supplied for the nozzle connections. The nozzle sizes of primary/ secondary streams of PHE's shall be of adequate size within acceptable range of velocity. The size selection shall be subject to approval in the event of order.

3.03.06 If necessary, relief valves shall be provided on both the streams.

#### 3.04.00 **Materials of construction:**

Material of the heat transfer plates and gaskets shall be consistent with the fluid handled. However, material specification for various parts shall be equal or superior to those specified in Data Sheet - A furnished a/w project enquiry.

#### 4.00.00 **FOUNDATION AND LIFTING ARRANGEMENTS:**

4.01.00 Plate heat exchanger shall be supplied with necessary foundation plates, anchor bolts, sleeves, nuts, inserts etc.


4.02.00 Plate heat exchanger shall be equipped with suitable lifting lugs/ eyebolts to facilitate handling during erection and maintenance.

#### 5.00.00 **PAINTING:**

5.01.00 The surface preparation of all exterior and interior surfaces of plate heat exchanger shall include the following:

- a) Removal of oil, grease, dirt and swarf etc
- b) Removal of rust and scale etc.,
- c) Sand blasting/ shot blasting.

5.02.00 All exterior surfaces of PHE's shall be sand/ shot blasted, painted with

	<b>TITLE :</b>	<b>SPECIFICATION NO.</b> PE-TS-MOU-179-N001
	<b>TECHNICAL SPECIFICATION</b>	<b>VOLUME :</b> II B
	<b>FOR PLATE HEAT EXCHANGERS</b>	<b>SECTION :</b>
	<b>(FOR MEMORANDUM OF</b>	<b>REV. NO.</b> 0 <b>DATE :</b> 15.06.12
	<b>UNDERSTANDING PURPOSE)</b>	<b>SHEET</b> Page 6 of 8

primer and finish coated with coal tar based epoxy coating of min. 250 microns thickness. Color shade etc. shall be subject to BHEL/ Customer approval.

#### 6.00.00 **SHOP INSPECTION AND TESTS:**

##### 6.01.00 **General:**

6.01.01 Manufacturer shall conduct all tests and stage inspections as per the approved quality plan to ensure that the plate heat exchanger shall conform to the requirements of this specification and of the applicable codes/ standards.

6.01.02 All materials used for manufacture/ fabrication of the plate heat exchanger components shall be of tested quality. Relevant test certificates for chemical analysis, mechanical tests and heat treatment shall be made available before the final shop inspection. In case the relevant test certificates are not available, the manufacturer shall arrange to carry out the necessary tests required as per approved quality plan and applicable codes at his cost, for which samples shall be identified by BHEL's representative.

6.01.03 All shop tests shall be conducted in the presence of BHEL's representative and test certificates for the same shall be furnished to BHEL for approval.


6.01.04 Qualification of welding procedures and welders shall be as per ASME B&PV Code, Section-IX/applicable code.

##### 6.02.00 **Heat Transfer Plates:**


6.02.01 Plate material used for pressing shall be furnished with mill test report showing chemical and physical properties and heat treatment records. Suitable correlating mark shall be available, so that BHEL's inspector can identify the material with test certificates before pressing the plates.

6.02.02 After pressing visual and dimensional checks on the plates shall be made in the presence of BHEL's inspector, on sampling basis.



	<b>TITLE :</b>	<b>SPECIFICATION NO.</b> PE-TS-MOU-179-N001
	<b>TECHNICAL SPECIFICATION</b>	<b>VOLUME :</b> II B
	<b>FOR PLATE HEAT EXCHANGERS</b>	<b>SECTION :</b>
	<b>(FOR MEMORANDUM OF</b>	<b>REV. NO.</b> 0 <b>DATE :</b> 15.06.12
	<b>UNDERSTANDING PURPOSE)</b>	<b>SHEET</b> Page 7 of 8

- 6.02.03 The heat transfer plates from each lot of the plates shall be tested by liquid/ dye penetrant test in order to check for cracks and other surface defects in presence of BHEL/customer's representative/Third party (Llyods, TUV or equivalent). If any defect is detected in any of these plates, the whole lot shall be tested and plates without defects only shall be accepted. Plate cleaning agent, liquid penetrant and developer shall not contain any halogen .Procedure for light box test and DP test shall be submitted to purchaser's approval. For Quantum of check , Refer Section C.
- 6.02.04 The heat transfer plates shall be tested by light box test in order to check for cracks and other surface defects in presence of BHEL/customer's representative/Third party (Lloyds', TUV or equivalent). The plates without defects only shall be accepted. For Quantum of check , Refer Section C.
- 6.03.00 **Gaskets:**
- 6.03.01 Certificate on Chemical composition of the gasket material shall be furnished to prove the quality. Sample testing in presence of BHEL's inspector shall also be conducted, if desired.
- 6.03.02 Shore hardness test shall be conducted on the gasket and certificate shall be furnished. Sample tests shall also be done in presence of BHEL's inspector.
- 6.03.03 Visual and dimensional check on a sampling basis shall be done. Plates and gaskets assembled together will be inspected for proper assembly.
- 6.04.00 **Frame Assembly:**
- 6.04.01 All materials for various components of frame assembly viz. frame plate, pressure plate, carrying bar, guide bar, tightening/ clamping bolts and nuts etc., shall be of tested quality and test certificates for chemical composition and physical properties shall be furnished.
- 6.04.02 If the thickness of the plates used for frame and pressure plates is 40 mm or more the same shall be checked ultrasonically to demonstrate the absence of lamination and lack of fusion etc.
- 6.05.00 All weld joints used for Fabrication of Heat exchangers shall be subjected to suitable non destructive examination. This shall include 100 % magnetic particle examination or other suitable NDT of all welds.


	TITLE :	SPECIFICATION NO. PE-TS-MOU-179-N001
	TECHNICAL SPECIFICATION	VOLUME : II B
	FOR PLATE HEAT EXCHANGERS	SECTION :
	(FOR MEMORANDUM OF	REV. NO. 0 DATE : 15.06.12
	UNDERSTANDING PURPOSE)	SHEET Page 8 of 8

7.00.00 **Document submission:**

7.01.00 The tenderer shall submit during contract stage a curve showing expected DM Water (Primary side) temperature at heat exchanger outlet for each one degree centigrade variation in ACW (Secondary side) temperature, all other parameters remaining unchanged. Similar curve for expected DM Water outlet temperature for variation of ACW flow rate with ACW inlet temperature remaining unaltered shall also be furnished. The bidder shall also furnish various curves to enable, apply corrections during site PG testing in the event of any data variation from the stipulated design parameters.


7.02.00 Bidder shall also furnish thermal design calculations at contract stage to justify the no. of plates offered.

DMS (BHEL-PEM)  
3062937-2013/09/09

	TECHNICAL SPECIFICATION FOR		Technical specification no	PE-TS-385/387-179-N001 (REV 0)
	PLATE HEAT EXCHANGER		Vol/Section	IIB/D
	DATASHEET - A		Rev	0
			date	07.09.13
	PROJECT		2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG	
1.0	General		(TG AUX.)	
1.1	Number of Plate Heat Exchanger	Nos	Total Six (6) nos [ 2W+1S Per Unit ]	
1.2	Arrangement		3 x 50% per unit	
1.3	Location		Indoor	
1.4	Primary side (Hot) Fluid		Passivated DM water (Refer enclosed water analysis)	
1.5	Secondary side (Cold) fluid		Cooling Water (Refer enclosed water analysis )	
1.6	Connecting Pipe size	(Primary Side)	NB	450
		(Secondary Side)	NB	450
2.0	Design			
2.1	Design Pressure	Kg/cm <sup>2</sup> (g)	10	
2.2	Operating Pressure	(Primary Side)	Kg/cm <sup>2</sup> (g)	About 7 Kg/sq. cm
		(Secondary Side)	Kg/cm <sup>2</sup> (g)	About 3.2 Kg/sq. cm
2.3	Mechanical Design Temp.	°C	60	
2.3	Heat Transfer per Sq.Mtr. Of Heat Transfer Plate	Kcal/Hr./m <sup>2</sup>	6500 (Max.)	
2.4	Minimum Heat Transfer Area	Sq. M.	-	
2.5	Specific Heat of Fluid	(Primary Side)	Cal/gmDeg.C	1.0
		(Secondary Side)	Cal/gmDeg.C	1.0
2.6	Density of Fluid	(Primary Side)	gm/cc	1.0
		(Secondary Side)	gm/cc	1.0
3.0	Guaranteed Performance Requirements for each Heat Exchangers in fouled condition:			
3.1	Flow rate	(DMCW Side)	M <sup>3</sup> /hr	1100
		(ACW Side)	M <sup>3</sup> /hr	1100
3.2	Inlet temperature	(DMCW Side)	°C	45.5
		(ACW Side)	°C	36
3.3	Outlet temp	(DMCW Side)	°C	38
		(ACW Side)	°C	43.5
3.4	* Allowable pressure drop across heat exchanger from inlet to outlet in fouled conditions at design flow	(DMCW Side)	MWC	7
		(ACW Side)	MWC	7
* High pressure drop than the specified figure will not be accepted, no credit shall be, however, given for lower pressure drop in bid evaluation. Pressure drop mentioned shall be calculated against flow mentioned at S. No 3.1				
4.0	Additional HT plates on Design Plates	%	NIL	
5.0	Heat Transfer Coefficient/Margin			
5.1	Overall fouling resistance	Hr m <sup>2</sup> deg C/Kcal	0.00008	
5.2	Minimum corrosion allowance (refer note 1)	mm	1.6	
6.0	Material of Construction :			
6.1	Heat Transfer Plates (Minimum acceptable plate thickness 0.6 mm). Refer Note no. 3		SS-AISI-316	
6.2	Plate Gasket		Nitrile Rubber	

	<b>TECHNICAL SPECIFICATION FOR</b>		<b>Technical specification no</b>	PE-TS-385/387-179-N001 (REV 0)
	<b>PLATE HEAT EXCHANGER</b>		<b>Vol/Section</b>	<b>IIB/D</b>
	<b>DATASHEET - A</b>		<b>Rev</b>	<b>0</b>
			<b>date</b>	07.09.13
	<b>PROJECT</b>		<b>2 X 660 MW NTPC MOUDA STPP STAGE II – STG PKG</b>	
6.3	Compression/ Pressure plates		Carbon steel to IS-2062 Gr. B, Epoxy painted	
6.4	Guide Rails/ bar		Carbon steel to IS-2062 Gr. B, Epoxy painted with stainless steel cladding	
6.5	Support Beam/ column		Carbon steel to IS-2062 Gr. B, Epoxy painted	
6.6	Nozzle		Carbon steel to IS-2062 Gr. B	
6.7	Nozzle flanges		Carbon steel to IS-2062 Gr. B	
6.8	Flange/ Counter flanges		Carbon Steel as per IS 2062 Gr. B (Confirming to ANSI B 16.5 class, Min.-150 lb	
6.9	Tie Bolts & Nuts		IS-1367 Gr 8.8 or equivalent	
6.10	Nozzle flange bolt and nut		SA 193 B7/ SA 194 2H	
6.11	Nozzle flange gasket		3mm wire inserted Red Rubber	
6.12	Name Plate		SS- AISI-316	
6.13	Painting			
	<b>External Surface</b>			
	a.) Surface Preparation		All surface other than stainless steels shall be painted. The steel surface to be applied with painting shall be thoroughly cleaned before applying painting by shotblasting etc shall be subjected to BHEL/NTPC approval.	
	b.) Primer		For all the steel surfaces inside the (indoor installation) building, a coat of red oxide primer of minimum thickness of 50 microns followed up with undercoat of synthetic enamel paint of minimum thickness of 50 microns shall be applied. The top coat shall consist of two coats each: of minimum thickness of 50 microns of synthetic enamel paint and thus total thickness shall be minimum 200 microns.	
	c.) Final Paint			
7.0	Extra Carrying capacity to be provided on frame assembly.	%	25	
8.0	Mandatory Spares			
8.1	Plates		20 % of each type and class	
8.2	Gaskets		20 % of each type and class	
8.3	Fasteners		20 % of each type and class	
8.4	Valve		NIL	
8.5	Definitions Regarding %	-	Quantity shall be calculated for % of total population of item in the project (if in fraction, round-off to next higher whole no.)	
9.0	Available space (L x W x H)	mm	----- Bidder to indicate -----	
10.0	Weight of Assembly	Kg	----- Bidder to indicate -----	
11.0	Performance Testing		All supplied PHE to be tested by vendor at site to demonstrate guaranteed performance.	
12.0	Performance curves and figures to be furnished during contact stage			
12.1	Primary side water outlet temperature vs. Secondary side water inlet temperature.			
12.2	Primary side water flow (80% to 115%) vs. Pressure drop and outlet temperature (Secondary side flow – 100%)			
12.3	Secondary side water flow (80% to 115%) vs. Secondary side pressure drop and primary side outlet temp (Primary side flow – 100%)			
12.4	Primary side water outlet temperature vs. Primary side inlet temp.			
12.5	Film heat transfer coefficient curve			
12.6	Correction Curves.			
Note:	1 Minimum Corrosion allowance on thickness (as per ASME Sec. VIII Div. I)			
	2 Metallurgy shall be suitable for type of water handled for various plates.			
	3 Minimum plate thickness of 0.6 mm is without any negative tolerance.			



	TECHNICAL SPECIFICATION FOR		Technical specification No.	PE-TS-385/387-179-N001 (REV 0)
	PLATE HEAT EXCHANGER		Vol/Section	IIB/D
	DATASHEET - A		Rev	0
			date	07.09.13
SL. NO.	DESCRIPTION		UNIT	
	PROJECT			2 X 660 MW NTPC MOUDA STPP STAGE II – SG PKG
1.0	General			
1.1	Number of Plate Heat Exchanger		Nos	Total Four (4) nos [ 1W+1S Per Unit ]
1.2	Arrangement			2X100% per unit
1.3	Location			Indoor
1.4	Primary side (Hot) Fluid			Passivated DM water (Ref enclosed water analysis)
1.5	Secondary side (Cold) fluid			Cooling Water (Ref enclosed water analysis )
1.6	Connecting Pipe size	(Primary Side)	NB	250
		(Secondary Side)	NB	350
2.0	Design			
2.1	Design Pressure		Kg/cm <sup>2</sup> (g)	12
2.2	Operating Pressure	(Primary Side)	Kg/cm <sup>2</sup> (g)	About 8.8 Kg/sq. cm
		(Secondary Side)	Kg/cm <sup>2</sup> (g)	About 3.2 Kg/sq cm
2.3	Mechanical Design Temp.		°C	60
2.3	Heat Transfer per Sq.Mtr. Of Heat Transfer Plate		Kcal/Hr./m <sup>2</sup>	6500 (Max.)
2.4	Minimum Heat Transfer Area		Sq. M.	-
2.5	Specific Heat of Fluid	(Primary Side)	Cal/gm.Deg.C	1.0
		(Secondary Side)	Cal/gm.Deg.C	1.0
2.6	Density of Fluid	(Primary Side)	gm/cc	1.0
		(Secondary Side)	gm/cc	1.0
3.0	Guaranteed Performance Requirements for each Heat Exchangers in fouled condition:			
3.1	Flow rate	(DMCW Side)	M <sup>3</sup> /hr	460
		(ACW Side)	M <sup>3</sup> /hr	750
3.2	Inlet temperature	(DMCW Side)	°C	44.5
		(ACW Side)	°C	36
3.3	Outlet temp	(DMCW Side)	°C	38
		(ACW Side)	°C	40.0
3.4	* Allowable pressure drop across heat exchanger from inlet to outlet in fouled conditions at design flow	(DMCW Side)	MWC	7
		(ACW Side)	MWC	7
* High pressure drop than the specified figure will not be accepted, no credit shall be, however, given for lower pressure drop in bid evaluation. Pressure drop mentioned shall be calculated against flow mentioned at S. No 3.1				
4.0	Additional HT plates on Design Plates		%	NIL
5.0	Heat Transfer Coefficient/Margin			
5.1	Overall fouling resistance	Hr m <sup>2</sup> deg C/Kcal		0.00008
5.2	Minimum corrosion allowance (refer note 1)		mm	1.6
6.0	Material of Construction :			
6.1	Heat Transfer Plates (Minimum acceptable plate thickness 0.6 mm). Refer Note no. 3			SS-AISI-316
6.2	Plate Gasket			Nitrile Rubber
6.3	Compression/ Pressure plates			Carbon steel to IS-2062 Gr. B, Epoxy painted
6.4	Guide Rails/ bar			Carbon steel to IS-2062 Gr. B, Epoxy painted with stainless steel cladding
6.5	Support Beam/ column			Carbon steel to IS-2062 Gr. B, Epoxy painted
6.6	Nozzle			Carbon steel to IS-2062 Gr. B
6.7	Nozzle flanges			Carbon steel to IS-2062 Gr. B

TECHNICAL SPECIFICATION FOR		Technical specification No.	PE-TS-385/387-179-N001 (REV 0)
PLATE HEAT EXCHANGER		Vol/Section	IIB/D
DATASHEET - A		Rev	0
		date	07.09.13
SL. NO.	DESCRIPTION	UNIT	
	PROJECT		2 X 660 MW NTPC MOUDA STPP STAGE II – SG PKG
6.8	Flange/ Counter flanges		Steel as per IS 2062 Gr. B (Confirming to ANSI B 16.5 class, Min
6.9	Tie Bolts & Nuts		IS-1367 Gr 8.8 or equivalent
6.10	Nozzle flange bolt and nut		SA 193 B7/ SA 194 2H
6.11	Nozzle flange gasket		3mm wire inserted Red Rubber
6.12	Name Plate		SS- AISI-316
6.13	Painting		
	External Surface		
	a.) Surface Preparation		All surface other than stainless steels shall be painted. The steel surface to be applied with painting shall be thoroughly cleaned before applying painting by shotblasting etc shall be subjected to BHEL/NTPC approval.
	b.) Primer		For all the steel surfaces inside the (indoor installation) building, a coat of red oxide primer of minimum thickness of 50 microns followed up with undercoat of synthetic enamel paint of minimum thickness of 50 microns shall be applied. The top coat shall consist of two coats each: of minimum thickness of 50 microns of synthetic enamel paint and thus total thickness shall be minimum 200 microns.
	c.) Final Paint		
7.0	Extra Carrying capacity to be provided on frame assembly.	%	25
8.0	Mandatory Spares		
8.1	Plates		2 % of each type
8.2	Gaskets		30% of total requirement
8.3	Fasteners		NIL
8.4	Valve		NIL
8.5	Definitions Regarding %		Quantity shall be calculated for % of total population of item in the project (if in fraction, round-off to next higher whole no.)
9.0	Available space (L x W x H)	mm	----- Bidder to indicate -----
10.0	Weight of Assembly	Kg	----- Bidder to indicate -----
11.0	Performance Testing		All supplied PHE to be tested by vendor at site to demonstrate guaranteed performance.
12.0	Performance curves and figures to be furnished during contact stage		
12.1	Primary side water outlet temperature vs. Secondary side water inlet temperature.		
12.2	Primary side water flow (80% to 115%) vs. Pressure drop and outlet temperature (Secondary side flow – 100%)		
12.3	Secondary side water flow (80% to 115%) vs. Secondary side pressure drop and primary side outlet temp (Primary side flow – 100%)		
12.4	Primary side water outlet temperature vs. Primary side inlet temp.		
12.5	Film heat transfer coefficient curve		
12.6	Correction Curves.		
Note: 1	Minimum Corrosion allowance on thickness (as per ASME Sec. VIII Div. I)		
2	Metallurgy shall be suitable for type of water handled for various plates.		
3	Minimum plate thickness of 0.6 mm is without any negative tolerance.		

### COOLING WATER ANALYSIS

Constituent	as	mg per litre
Calcium	CaCO <sub>3</sub>	407
Magnesium	CaCO <sub>3</sub>	250
Sodium & Potassium	CaCO <sub>3</sub>	175
Cations	CaCO <sub>3</sub>	832
Bicarbonates	CaCO <sub>3</sub>	516
Chloride	CaCO <sub>3</sub>	162
Sulphate	CaCO <sub>3</sub>	154
Anions	CaCO <sub>3</sub>	832
Silica	SiO <sub>2</sub>	50
Iron	Fe	< 0.8
pH Value	-	8.4
TSS	mg/l	< 25

**Note :** The C.W system is expected to operate at about 4.0 Cycles of Concentration.

**ANALYSIS OF DM WATER TO BE USED FOR  
MAKE-UP WATER TO CONDENSER**

S.No.	Characteristics		Value
i)	Silica (Max.)	-	0.02 ppm as SiO <sub>2</sub>
ii)	Iron as Fe	-	Nil
iii)	Total hardness	-	Nil
iv)	pH value	-	6.8 to 7.2
v)	Conductivity	-	Not more than 0.1 excluding the effects of free CO <sub>2</sub>

Note: For Passivated DM water pH shall be from 8.5 to 9.5





**TITLE :**  
**TECHNICAL SPECIFICATION FOR**  
**PLATE HEAT EXCHANGERS**

**SPECIFICATION NO.** PE-TS-385/387-179-N001

**VOLUME** II B

**SECTION** D

**REV. NO.** 0

**DATE** 07.09.13

**SHEET** 1 OF 1

**DATA Sheet-C**

Drawings / documents distribution schedule to be followed by successful bidder:

1.0 Within 2 weeks from the date of LOI, the successful bidder shall submit following drawings/ documents.

- a) Data Sheet-B duly filed in along with heat transfer calculations.
- b) G.A./ installation drawings, indicating principal dimensions and heights of equipment being supplied, size and location of various nozzles, connection supporting arrangement, withdrawal space & scope of supply etc.
- c) Foundation arrangement drawings, showing load data on supports, size and location of anchor bolts etc.
- d) Quality Plan.
- e) Area & Heat Load Calculations.
- f) Various performance curves as listed in our specification.
- g) Cross-Sectional drawing indicating bill of quantities and materials of construction.
- h) Performance test procedure.

2.0 Within the stipulated time period as per vendor's drawings/ documents schedule, the following shall be submitted but not later than one month before 1<sup>st</sup> dispatch.

- a) Drawings of components & details as deemed necessary.
- b) Instruction manual for erection, operation & maintenance.
- c) Storage instruction.

3.0 Before despatch of the equipment the bidder shall furnish the following.

- a) Material test certificates.
- b) Shop test reports & certificates.

4.0 Distribution of drawings / documents for all projects:

The successful bidder, after the award of the contract shall furnish the drawings/ documents as per the following distribution schedule.

Sl. No.	Type of Document	No of Hard copies	No. of Soft copies
1	Documents submitted for Approval	18 Nos.	2 Nos.
2	Final Distribution(Approved Documents)	18 Nos.	2 Nos.
3	O&M Manuals	18 Nos.	2 Nos.
4	As built drawings	18 Nos.	2 Nos.

<div><div></div><div>STANDARD QUALITY PLAN</div><div>SHEET OF</div></div>		CUSTOMER: PROJECT TITLE: SPECIFICATION NO. :													
		BIDDER/VENDOR: QUALITY PLAN NO.:PE-QP-999-179-N005		SPECIFICATION TITLE :											
		SYSTEM: ITEM: PLATE HEAT EXCHANGER		SECTION :											
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS			
					2/3 1				P W V						
1.	2.	3.	4.	5.	6.	7.	8.	9.	D*	**	10.	11.			
1.0 RAW MATERIAL INSPECTION															
1.1	Frame Plates & Pressure Plates, Counter Flanges, Connection Lining Material.Top And Bottom Carrying Bar.	Physical Properties	MA	Physical Test	1/ Heat/He -at Batch	1/ Heat/He -at Batch	App. Drg / Data Sheet	Relevant material spec.	Mill TC Or Lab Test Report	✓	2,3 -	1	If co-related mill TCS are not available then check testing carried out by reputed lab.		
		Chemical Properties	MA	Chemical Analysis	1/ Heat/He -at Batch	1/ Heat/He -at Batch	-do-	-do-	-do-	✓	2,3 -	1		-do-	
		Dimensions	MA	Measurement	100%	100%	Approved Drawings			Inspection Reports	✓	2,3 -		-	
		Workmanship And Finish	MA	Visual	100%	100%	-do-	-do-	-do-	Inspection Reports		2,3 -		-	
		Lamination (Applicable For Frame And Pressure Plate Only)	CR	Ultrasonic Test	100%	100%	SA 435	SA 435	-do-	✓	2,3 -	1		Applicable for plate thickness more than 25 mm only	
1.2	Heat Transfer Plates	Physical Properties	MA	Physical Test	1/ Heat	1/ Heat	App. Drg. / Data Sheet	App. Drg. / Data Sheet	Mill TC Or Lab Test Report	✓	2,3 -	1	Co-related mill TCS to be provided See Remark 1		
1.3	Gaskets	Chemical Properties	MA	Chemical Analysis	1/ Heat	1/ Heat	-do-	-do-	-do-	✓	2,3 -	1	-do-		
		Dimensions (including thickness)	MA	Measurement	100%	Sample	Approved Drawings/ Datasheets		Inspection Reports	✓	2,3 -	1			
		Dimensions	MA	Measurement	100%	Sample	Approved Drawings/ Datasheets		Inspection Reports		2,3 -	1			
		Workmanship And Finish	MA	Visual	-do-	-do-	No damage, No Surface defects.		-do-		2,3 -	1	Co-related mill TCS to be provided See Remark 1		
		Contour	MA	Visual	-do-	-do-	Mfg. Drgs / specification		-do-		2,3 -	1			
		Hardness	CR	Measurement	-do-	-do-	Approved Drawings		-do-	✓	2,3 -	1			
				LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.				DOC. NO.:		REV. CAT.-.					
MANUFACTURER/ SUB-SUPPLIER		MAIN-SUPPLIER		** 1: BHEL 2: VENDOR, 3: SUB VENDOR				Cust. Logo							
SIGNATURE		P: PERFORM W: WITNESS AND V: VERIFICATION. CHP: CUSTOMER HOLD POINT				FOR CUST. USE		REVIEWED BY		APPROVED BY		APPROVAL SEAL			
FORMAT NO.: QS-01-QAI-P-09/F1-R1				1 / 5				ENGG. DIV./QA&I							

<div><div></div><div>STANDARD QUALITY PLAN</div><div>SHEET OF</div></div>		CUSTOMER:		PROJECT TITLE:			SPECIFICATION NO. :							
		BIDDER/VENDOR:		QUALITY PLAN NO.:PE-QP-999-179-N005			SPECIFICATION TITLE :							
		SYSTEM:		ITEM: PLATE HEAT EXCHANGER			SECTION :							
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS		
1.	2.	3.	4.	5.	6.	7.	8.	9.	D*	P	W	V	11.	
1.4	Tightening Bolts & Nuts. (Tie Rod)	Physical Properties	MA	Physical Test	1/ Heat	1/ Heat	Relevant Material Spec.	Mill Tc Or Lab Test Report	✓	2,3	-	1	Manufacturer test certificate will be submitted for review.	
		Chemical Properties	MA	Chemical Analysis	1/ Heat	1/ Heat	-do-	-do-	-do-	✓	2,3	-	1	-do-
		Dimensions	MA	Measurement	100%	100%	Approved Drawings	-do-	IR	✓	2,3	-	1	
		Workmanship and Finish	MA	Visual	100%	100%	-do-	-do-	-do-		2,3	-	-	
		Internal Soundness (For diameter >= 40 mm)	CR	UT	100%	100%	ASTM A 388	See Remark - 3	-do-	✓	2,3	-	1	UT will be carried on raw material stage.
2.0	IN PROCESS INSPECTION													
	HEAT TRANSFER PLATES	Area Measurement	MA	White Light Scanning	1 per Type	1 per Type	Approved drawing/ data sheet	Approved drawing/ data sheet	TC	✓	2,3	-	1	See Remark 4
		Physical Properties	MA	Physical Test	1 Sample per Heat	1 Sample per Heat	Approved drawing/ data sheet	Relevant Material Spec.	Mill TC or Lab Test Report	✓	2,3	-	1	Manufacturing test certificates will be submitted for review.
		Chemical Properties	MA	Chemical Analysis	1 Sample per Heat	1 Sample per Heat	Approved/ drawing/ data sheet	Relevant Material Spec.	Mill TC or Lab Test Report	✓	2,3	-	1	Manufacturing test certificates will be submitted for review.
		Dimension (including thickness)	MA	Measurement	1 Sample per Heat	1 Sample per Heat	Approved drawing/ data sheet	Approved drawing/ data sheet	Inspection Report	✓	2,3	-	1	
		Workmanship And Finish	MA	Visual	100%	100%	Approved drawing/ data sheet	No scratches, cracks etc.	-do-		2,3	-	1	
				LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION. ** 1: BHEL 2: VENDOR, 3: SUB VENDOR P: PERFORM W: WITNESS AND V: VERIFICATION. CHP: CUSTOMER HOLD POINT				DOC. NO.:		REV.		CAT.-		
MANUFACTURER/ SUB-SUPPLIER		MAIN-SUPPLIER						Cust. Logo						
SIGNATURE						FOR CUST. USE		REVIEWED BY		APPROVED BY		APPROVAL SEAL		
FORMAT NO.: QS-01-QAI-P-09/F1-R1		2 / 5				ENGG. DIV./QA&I								

<div></div> <div>STANDARD QUALITY PLAN</div> <div>SHEET OF</div>		CUSTOMER: PROJECT TITLE: SPECIFICATION NO. :				SPECIFICATION TITLE : SECTION :						
		BIDDER/VENDOR: QUALITY PLAN NO.: PE-QP-999-179-N005		ITEM: PLATE HEAT EXCHANGER								
		SYSTEM:										
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS
					2/3 1			9.	P W V			
1.	2.	3.	4.	5.	6.	7.	8.	D*	** 10.			11.
					Refer Sect. C , Clause No. 4.2	Manufacturer's DP test procedure (to be reviewed and approved by BHEL/Customer during contract stage)		DPT Report	2,3	1	-	See Remark 2
		Surface Defects And Cracks	CR	DP test	100%	2%	Manufacturer's Light Box/Vacuum test procedure (to be reviewed and approved by BHEL/Customer during contract stage)	Vacuum Test Report	2,3	1	-	See Remark 2
2.1	Welding Procedures Specification (WPS)	Correctness	MA	Verification	100%	100%	ASME SEC-IX.	QW 482 ASME SEC-IX	2,3	-	1	Customer /BHEL/ TPI (NPCIL, EIL, LLYODS & BVIS) approved WPS shall be used for welding.
2.2	Procedure Qualification Records (PQR)	Suitability	MA	Visual & Mechanical Test	100%	100%	-do-	QW 483 ASME SEC-IX.	2,3	-	1	
2.3	Welders Performance Qualification	Welder's Performance Soundness Of Welds	MA	Visual / RT & Mechanical	100%	100%	-do-	QW 484 ASME SEC-IX	2,3	-	1	Customer / BHEL/ TPI (NPCIL, EIL, LLYODS & BVIS) approved welder shall be engaged for welding.
2.4	Weld joint of expander/reducer.	Welding Of Outer Flange To Reducer/Expander	MA	Visual	100%	100%	Approved Drawings	Inspection Report	2,3	-	1	
2.5	PHE Structure	Workmanship and finish	MA	DPT	100%	100%	Manufacturer's DP test procedure (to be reviewed and approved by BHEL/Customer during contract stage)	DPT Report	2,3	1	-	
2.6	Plate Gaskets	Presence Of Gasket	MA	Measurement & Visual	100%	100%	Approved Drawings	Inspection Report	-	2	1	
				Visual	100%	100%	Mfg. Spec.	-do-	2	1	-	
		LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.					Cust. Logo		DOC. NO.:		REV. CAT.-.	
		** 1: BHEL 2: VENDOR, 3: SUB VENDOR					FOR CUST. USE					
MANUFACTURER/ SUB-SUPPLIER		P: PERFORM W: WITNESS AND V: VERIFICATION. CHP: CUSTOMER HOLD POINT							REVIEWED BY		APPROVED BY	
SIGNATURE									ENG. DIV./QA&I		APPROVAL SEAL	
FORMAT NO.: QS-01-QAI-P-09/F1-R1		3 / 5										



<div style="background-color: black; width: 50px; height: 50px; margin: 0 auto;"></div>		<b>STANDARD QUALITY PLAN</b> SHEET OF		CUSTOMER: PROJECT TITLE: SPECIFICATION NO. :				SPECIFICATION TITLE :			
				BIDDER/VENDOR:		QUALITY PLAN NO.:PE-QP-999-179-N005		ITEM: PLATE HEAT EXCHANGER		SECTION :	
				SYSTEM:							
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK 2/3 1	REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY P W V		REMARKS
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.		11.
3.5	Painting and packing	Dry film thickness, shade, soundness & completeness	MA	Measurement & visual	100%	100%	Approved Drawings/ Data sheets	-do-	✓	2	1
<b>REMARKS:-</b>											
1.	Mill TC's for HT Plates & Gaskets shall be submitted for review of BHEL.										
2.	As per Sect. C , Clause No. 4.2, random witness by BHEL/ NTPC at Bidder's works, in case any defect is found in any of selected % of plates, the whole lot shall be tested in presence of BHEL & Customer. H.T. Plates without defect only shall only be accepted.										
3.	Ultrasonic test of tie rods shall be carried out using 10 mm / 20 mm size Normal Beam Probe of frequency 2 MHz. Using this probe the back wall echo in the sound area of bar shall be adjusted to 100% of full Screen Height (FSH). The whole bar shall be scanned under this sensitivity setting. In this sensitivity setting any defect echo indication having height greater than 20% of FSH is not acceptable. More than 20% loss in back wall echo at any stage is also not acceptable.										
4.	Inspection of Heat Transfer Plate Area Measurement shall be by White Light Scanning Method from Third Party like TUV/ Lloyd and certificate shall be submitted for review of BHEL.										

MANUFACTURER/ SUB-SUPPLIER		MAIN-SUPPLIER		<b>LEGEND:</b> * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION. ** 1: BHEL 2: VENDOR, 3: SUB VENDOR P: PERFORM W: WITNESS AND V: VERIFICATION. CHP: CUSTOMER HOLD POINT		Cust. Logo	DOC. NO.:		REV.		CAT.-		
SIGNATURE		SIGNATURE		5 / 5		ENG. DIV./QA&I		REVIEWED BY		APPROVED BY		APPROVAL SEAL	

**PROCEDURE FOR MEASUREMENT OF HEAT TRANSFER SURFACE AREA OF THE  
PHE PLATES**

**Definition of Heat transfer area:**

The Heat transfer area of the PHE plate is the area of the plate participating in the heat transfer process viz. the wetted surface area inside the gasketed groove of the plate as the Annexure 1.

**Steps to Measure the Area:**

- 1) The surface area of the plate shall be cleaned thoroughly.
- 2) Apply the developer (as used in Dye Penetrant test) over the entire surface of the plate.
- 3) Fix the reference stickers at several appropriate locations on the plate.
- 4) White light (CFL) is projected on the plate.
- 5) The entire surface area including all the geometrical features of the plate (corrugations) is captured by the 3D camera.
- 6) The 3D image of the plate is then converted into CAD format.
- 7) The surface area can be measured from the 3D- CAD drawing.



### ANNEXURE -1

Heat transfer area to be measured – Shown in Hatched portion below

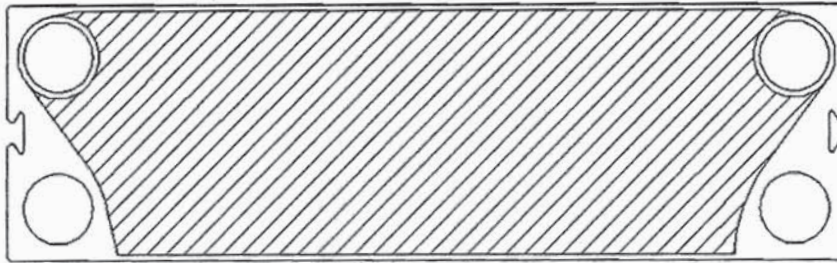


Fig. 1: Wetted Surface Area for Parallel Connection

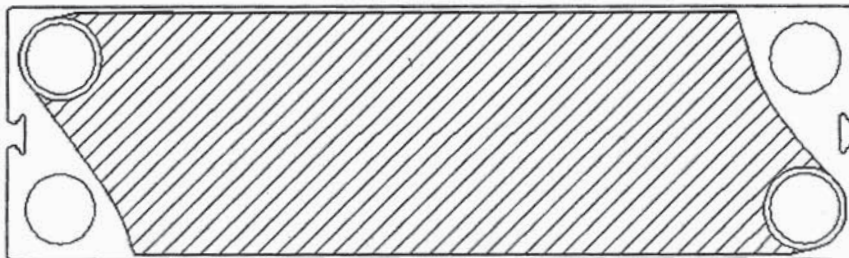


Fig. 2: Wetted Surface Area for Diagonal Connection