



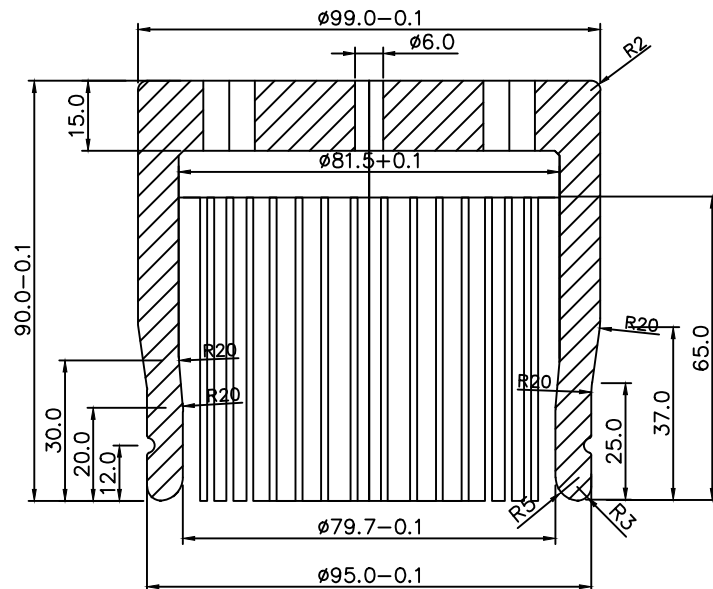

1. Component Shall be Silver plated of 10–12 micron thickness.
2. All the sharp edges shall be finished on 0.4X45°.

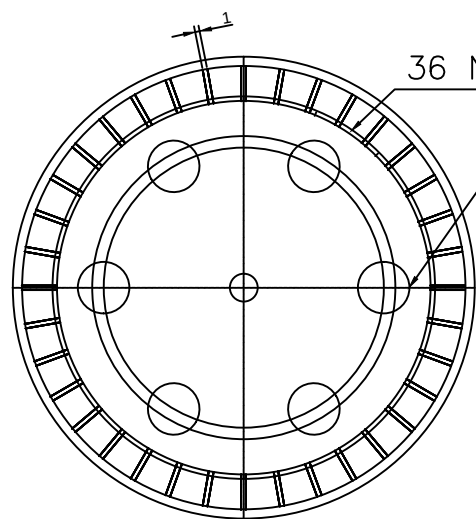

36 Nos. of slits, 1mm Wide x 65 mm long

6 Nos of $\phi 11.0$, 15 mm deep Clear holes @PCD60.0

VAR.00	REMARKS	VAR. NO.	ITEM NO.	01	BLOCK	STD.	DRAWING NO.	IT.NO.	MATL. CODE	A	C	UNIT	UNIT WT.	GS	ZONE
								VAR	MATL. SPECN.				QTY.		

FINAL ON 20/06/14

REV.	DATE	ALTERED	REV.	DATE	ALTERED	DEPT.	GRADE OF TOL. DIM. C/M/F	SCALE	01	WEIGHT(KG)	REF. TO	ITEM NO.	NO. OF ITEMS
		CHECKED			CHECKED	CODE		NTS			RD DG 4 35 0517 0001	1	
ZONE		01	ZONE			TITLE				CARD CODE	DRAWING NO.		REV.
						Finger Contact					RD DG 4 35 0517 0034		
											SHEET NO.	NO. OF SHEETS	

TYPE OF PRODUCT						NAME OF CUSTOMER					
GSM 245											
BHARAT HEAVY ELECTRICALS LTD.						BHO PAL					
DRN	NAME	SIGN.	DATE	NO. OF		DRN	NAME	SIGN.	DATE	NO. OF	
CKD	SA		20.06.14	VAR.		CKD	SA		20.06.14	VAR.	
APPD	MMRAO		20.06.14			APPD	MMRAO		20.06.14		