

# REQUEST FOR QUOTATION



MMI:PU:RF:003

BHARAT HEAVY ELECTRICALS LIMITED  
Electronics Division  
PB No. 2606, Mysore Road Bangalore - 560026  
INDIA

RFQ NUMBER:  
AKSPROP129

(address for communication) :

(for all correspondence)  
Purchase Executive : ABHISHEK  
Phone : 26998102  
Fax : 00918026989215  
E-mail: singh.abhishek@bhel.in

This RFQ is for entering into Rate contract (RC) with BHEL for the tendered item. Validity of the RC will be 1 year from the award of rate contract. Firm orders will be placed during the tenure of rate contract. Prices will remain firm till the validity of RC or till the completion of supplies against the Purchase Orders placed against this rate contract whichever is later. Please note that these quantities are projections based on the current business scenario and expected orders from customers. In the eventuality of business not coming through, BHEL is not obligated to exhaust the ordering of RC quantities.

Sl No.	Description	Qty	Unit	Delivery qty	Delivery Date
1	TI0668103604 CAPACITOR 154UF +/-10% 440V 40A * HSN/SAC : 9032 [REDACTED] [REDACTED] [REDACTED] CAPACITOR 154UF +/-10% 440V 40A conforming to spec PS4452653 As per Specification PS/445/2653 Rev00	2,700	NO	2,700	10.04.2026

Total Number of Items - 1

- 1.
- 2.

<p>NOTES:</p> <ol style="list-style-type: none"> <li>1. This RFQ is governed by:</li> </ol> <p>a) INSTRUCTIONS TO BIDDERS/SELLERS and GENERAL CONDITIONS OF CONTRACT FOR PURCHASE available at <a href="http://edn.bhel.com">http://edn.bhel.com</a> (RFQ-PO Terms &amp; Conditions)</p> <p>b) Any other specific Terms and Conditions mentioned.</p> <p>[REDACTED]</p> <p>[REDACTED]</p> <p>* The HSN/SAC no mentioned against the line items in the RFQ are indicative only.</p>	<p>For and On behalf of BHEL.</p> <p style="text-align: right;">ABHISHEK Control Equipment</p> <p style="text-align: right;">1 OF 1</p>
--	---

## 1. SCOPE

The Pre-Qualification Requirement document specifies the requirements to be met by the vendors (hereafter called Bidder) who wish to participate in the tender for supply of **154µF Sinewave Filter Capacitor for rolling stock applications**.

This PQR should be read in conjunction with the Purchase Technical Specification **PS4452653 R00 dtd 21.06.2019**.

## 2. CREDENTIAL

- a) The Bidder should be Manufacturer or authorized dealer / supplier of - **154µF Sinewave Filter Capacitor** used in Rolling Stock applications. Documentary proof like relevant POs / invoice copies, valid authorization certificate etc shall be provided along with the offer.
- b) The Rolling Stock Applications under consideration shall include Locomotive, EMU, MEMU, Metro Trains, High Speed Trains, Train sets, Inspection Cars and Special Track Machines.
- c) For the vendors outside India, documentary proof for usage of the product in rolling stock applications shall be submitted. Acceptance of such certification shall be at BHEL's discretion.
- d) The Bidder should not be under the category of "hold" or "blacklisted" by any of the BHEL units/ any Govt of India PSU/ Govt of India/ statutory bodies of any state Govt as on date of bid submission. A declaration to this effect shall be submitted along with the offer.

## 3. QUALITY SYSTEM

- a) The manufacturer should have valid ISO 9001:2015 or latest certification covering the manufacturing and testing of the subject item
- b) The manufacturer should possess a clearly laid down quality Assurance Plan for the product covering the following aspects  
Organization Chart, clearly indication the quality control set up  
Qualification of key personnel and officials deployed in the quality control cell.
- c) Process Flow Chart indicating process of manufacture for an individual product or for a family of products, if the process is same.
- d) Quality Assurance System – Inspection and Testing plan to cover
  - Incoming material
  - Process control
  - Product control
  - System control
  - Testing facility
- e) Stage inspection details shall include the inspection procedure, inspection parameters, method of testing/ test procedure, sample sizes for destructive & non-destructive testing etc.
- f) Calibration scheme and status of calibration of test equipment  
The process, testing and measuring equipment shall be duly calibrated by approved agency and the validity of calibration should be current.

#### **4. GENERAL REQUIREMENTS**

- a) It is preferred that the bidder is the manufacturer of this item. If the bidder is importing some portion of the components, then minimum value addition in India shall be 20%. Bidder to confirm this in the offer. Value addition less than 20% is not acceptable. A declaration to this effect shall be submitted along with the offer.
- b) The technical bid of bidders, which qualify technically but are not approved for the subject item by the Customer Approving Authority, shall be referred by BHEL to the customer Approving Authority for approval with intimation to the bidder. Consequent to the decision of Customer Approving Authority, the bidder shall be added to the vendor list of the subject item for future tenders. Concurrently BHEL shall consider placing developmental order on the bidder after accessing the capability of the bidder to manufacture / develop the subject item. However, BHEL shall treat the offer as "Not meeting" Pre-Qualification Criteria for the subject tender.
- c) The Customer Approving Authority shall be RDSO/CLW/BLW/PLW/ICF/RCF/MCF or any other agency as designated by the Customer.
- d) The bidder should possess a valid type test report, not older than five years, as per relevant standards mentioned in the specification with respect to time during the bid submission in case of catalog items. In case of custom made items, a bidder can submit the type test report of an item of similar or higher rating with a declaration for conducting the type test in case of award of order or developmental order. The bidder can also submit the test reports conducted in their own facility with the document of their lab accreditation. However, BHEL reserve it's right to insist on conducting the Type test again in a laboratory of it's choice.
- e) For the bid of vendors already qualified and appearing in BHEL's source list, the requirement of type test report and proof of supply shall not be applicable.

#### **5. DOCUMENTATION TO BE SUBMITTED ALONG WITH OFFER**

- a) Documentary proof for experience as per clause 2.a
- b) Clause by Clause compliance to the technical specification
- c) Declaration regarding status as per clause 2.d
- d) Declaration on MII (Make in India) as per clause 3.a
- e) Declaration for conducting Type Test as per clause 3.d



A4 - 12

**PURCHASE SPECIFICATION FOR  
154 $\mu$ F SINEWAVE FILTER CAPACITOR  
GROUP: TRACTION ENGINEERING**

P.S NO. : PS4452653

REV. NO : 00

PAGE : 01 OF 08

**COPYRIGHT AND CONFIDENTIAL**  
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED.  
It must not be used directly or indirectly in anyway detrimental to the interest of the company.

**REVISION HISTORY SHEET**

REV. NO	DATE	NATURE OF CHANGE	REASONS	PREPARED BY	APPROVED BY
00	21.06.2019	FIRST ISSUE	--	VVNSSRM KRISHNA V	SHEKAR R

THIS DOCUMENT IS A SPECIFICATION CUM DATA SHEET. VENDOR TO GIVE CONFIRMATIONS AND DATA AS REQUIRED AND SUBMIT THE SAME TO BHEL / EDN, BANGALORE. ANY DEVIATIONS TO THIS DOCUMENT TO BE BROUGHT OUT CLEARLY BY VENDOR.

REVISIONS	00	DT: 21.06.2019	APPROVED BY:	R.SHEKAR	
		PREPARED BY: VVNSSRM KRISHNA V		ISSUED BY TRACTION ENGG	DATE 21.06.2019



A4 - 12

**PURCHASE SPECIFICATION FOR  
154 $\mu$ F SINEWAVE FILTER CAPACITOR  
GROUP: TRACTION ENGINEERING**

P.S NO. : PS4452653

REV. NO : 00


PAGE : 02 OF 08

**SPECIFICATION FOR 154 $\mu$ F SINEWAVE FILTER CAPACITOR**

**Brief description**

The capacitor in this specification is used in sine wave filter application

COPYRIGHT AND CONFIDENTIAL  
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED.  
It must not be used directly or indirectly in anyway detrimental to the interest of the company.

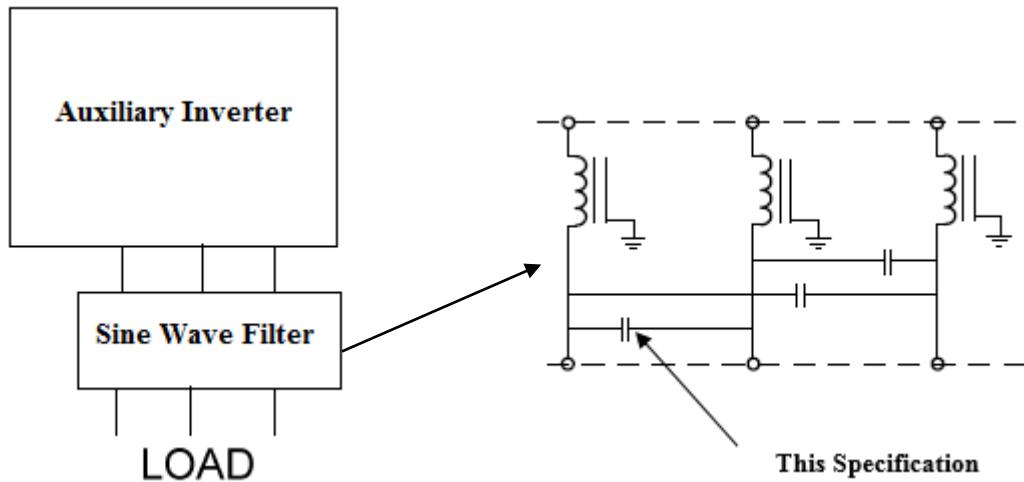

**Figure 1: Simplified main power scheme**

		 A4 - 12	<b>PURCHASE SPECIFICATION FOR 154μF SINEWAVE FILTER CAPACITOR GROUP: TRACTION ENGINEERING</b>	P.S NO. : PS4452653 REV. NO : 00 PAGE : 03 OF 08
<b>1. Detailed Specification</b>				
<b>1. Electrical Parameters</b>				
1. Capacitance : <b>154μF +/-10%</b> 2. Rated Voltage : <b>440V RMS</b> 3. Maximum Terminal current : <b>40A</b> 4. Non Recurrent Surge Voltage : <b>1300V</b> 5. Test Voltage b/w terminals and case : <b>AC 2500V RMS/50Hz/10sec</b> 6. Test Voltage b/w terminals : <b>AC 950V RMS/50Hz/10sec</b> 7. Series resistance : <b>&lt;1.45mΩ</b> 8. Tangent of Loss Angle : <b><math>2*10^{-4}</math></b> 9. Self-Inductance : <b>&lt;160nH</b> 10. Maximum Peak Current : <b>&gt;2.8KA</b> 11. Maximum Surge Current : <b>&gt;5.6KA</b> 12. Cooling : <b>Natural Convection</b>				
<b>2. Mechanical Requirements</b>				
1. Height : <b>Refer to Fig-2</b> 2. Width : <b>Refer to Fig-2</b> 3. Depth : <b>Refer to Fig-2</b> 4. Terminal height : <b>Refer to Fig-2</b> 5. Power Terminals : <b>Screw Terminals M10</b> 6. Weight : <b>&lt; 2.5 +/-10% Kg</b>				
<small>COPYRIGHT AND CONFIDENTIAL The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED. It must not be used directly or indirectly in anyway detrimental to the interest of the company.</small>				



A4 - 12

**PURCHASE SPECIFICATION FOR  
154 $\mu$ F SINEWAVE FILTER CAPACITOR  
GROUP: TRACTION ENGINEERING**

P.S NO. : PS4452653

REV.NO : 00

PAGE : 04 OF 08

**7. Materials**

- a) Type : Dry type, Resin Filled, Self-healing
- b) Case : Aluminium
- c) Fixing : Stud M12\*16mm
- d) Terminals : Copper, tin Plated

**8. Rating Plate/Marking** : As Per Specification Clause 8

**9. Shock Resistance** : As per IEC 61373

**10. Vibration** : As per IEC 61373

**2. Standards**

Standard	Description
IEC61376	Creepage and clearance
IEC61373	Shock and vibration test
IEC61881-1	Rolling stock equipment – capacitors for power electronics

**3. Functional requirements**

Description	Value	Unit
Operating hours	8640	hours/year
Typical load	continuous operation	
Surge current	1	times/year

COPYRIGHT AND CONFIDENTIAL  
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED.  
It must not be used directly or indirectly in anyway detrimental to the interest of the company.

		 A4 - 12	<b>PURCHASE SPECIFICATION FOR 154μF SINEWAVE FILTER CAPACITOR GROUP: TRACTION ENGINEERING</b>	P.S NO. : PS4452653 REV. NO : 00 PAGE : 05 OF 08																																																												
		<b>4. Ambient conditions / operating conditions</b>																																																														
		<table border="1"> <thead> <tr> <th>Description</th><th>Value</th><th>Unit</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Operation</td><td>-25..+70</td><td>°C</td><td></td></tr> <tr> <td>Temperature distribution over the year</td><td>+70 +65 +55 +40 &lt; +40</td><td>°C</td><td>10 days/year 20 days/year 90 days/year 100 days/year 130 days/year</td></tr> <tr> <td>Storage</td><td>-25..+70</td><td>°C</td><td></td></tr> <tr> <td>Average year temperature</td><td>+ 40</td><td>°C</td><td></td></tr> <tr> <td>Relative humidity</td><td>&lt; 95</td><td>%</td><td>During app 3 - 4 months (rainy season) per year frequent condensation can occur</td></tr> <tr> <td>Altitude</td><td>&lt;1200</td><td>m</td><td></td></tr> <tr> <td>Pollution levels</td><td></td><td></td><td></td></tr> <tr> <td>Operation in coastal areas</td><td></td><td></td><td></td></tr> <tr> <td>  Maximum PH</td><td>8.5</td><td></td><td>of water damp</td></tr> <tr> <td>  Max. concentration of sulphate</td><td>7</td><td>mg/liter</td><td>of water damp</td></tr> <tr> <td>  Max. concentration of chlorine</td><td>6</td><td>mg/liter</td><td>of water damp</td></tr> <tr> <td>  Maximum conductivity</td><td>130</td><td>μS/cm</td><td>of water damp</td></tr> <tr> <td>Operation in desert terrain</td><td></td><td></td><td></td></tr> <tr> <td>  Dust content in air</td><td>1.6</td><td>mg/m3</td><td></td></tr> </tbody> </table>			Description	Value	Unit	Notes	Operation	-25..+70	°C		Temperature distribution over the year	+70 +65 +55 +40 < +40	°C	10 days/year 20 days/year 90 days/year 100 days/year 130 days/year	Storage	-25..+70	°C		Average year temperature	+ 40	°C		Relative humidity	< 95	%	During app 3 - 4 months (rainy season) per year frequent condensation can occur	Altitude	<1200	m		Pollution levels				Operation in coastal areas				Maximum PH	8.5		of water damp	Max. concentration of sulphate	7	mg/liter	of water damp	Max. concentration of chlorine	6	mg/liter	of water damp	Maximum conductivity	130	μS/cm	of water damp	Operation in desert terrain				Dust content in air	1.6	mg/m3	
Description	Value	Unit	Notes																																																													
Operation	-25..+70	°C																																																														
Temperature distribution over the year	+70 +65 +55 +40 < +40	°C	10 days/year 20 days/year 90 days/year 100 days/year 130 days/year																																																													
Storage	-25..+70	°C																																																														
Average year temperature	+ 40	°C																																																														
Relative humidity	< 95	%	During app 3 - 4 months (rainy season) per year frequent condensation can occur																																																													
Altitude	<1200	m																																																														
Pollution levels																																																																
Operation in coastal areas																																																																
Maximum PH	8.5		of water damp																																																													
Max. concentration of sulphate	7	mg/liter	of water damp																																																													
Max. concentration of chlorine	6	mg/liter	of water damp																																																													
Maximum conductivity	130	μS/cm	of water damp																																																													
Operation in desert terrain																																																																
Dust content in air	1.6	mg/m3																																																														
		<b>5. Reliability, availability, maintainability and safety</b>																																																														
		<table border="1"> <thead> <tr> <th>Description</th><th>Value</th><th>Unit</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Design life</td><td>30</td><td>years</td><td>Expected lifetime: 30 x 8640 = 260000 hours</td></tr> <tr> <td>Failure rate</td><td>100</td><td>FIT</td><td></td></tr> <tr> <td>Maintenance</td><td></td><td></td><td>To be defined by supplier</td></tr> <tr> <td>Safety</td><td></td><td></td><td>The risk of explosion due to over voltage, ageing, loss or other reasons should be minimized</td></tr> </tbody> </table>				Description	Value	Unit	Notes	Design life	30	years	Expected lifetime: 30 x 8640 = 260000 hours	Failure rate	100	FIT		Maintenance			To be defined by supplier	Safety			The risk of explosion due to over voltage, ageing, loss or other reasons should be minimized																																							
Description	Value	Unit	Notes																																																													
Design life	30	years	Expected lifetime: 30 x 8640 = 260000 hours																																																													
Failure rate	100	FIT																																																														
Maintenance			To be defined by supplier																																																													
Safety			The risk of explosion due to over voltage, ageing, loss or other reasons should be minimized																																																													

COPYRIGHT AND CONFIDENTIAL  
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED.  
It must not be used directly or indirectly in anyway detrimental to the interest of the company.



A4 - 12


**PURCHASE SPECIFICATION FOR  
154 $\mu$ F SINEWAVE FILTER CAPACITOR  
GROUP: TRACTION ENGINEERING**

P.S NO. : PS4452653

REV. NO : 00

PAGE : 06 OF 08

### 6. Dimensional details

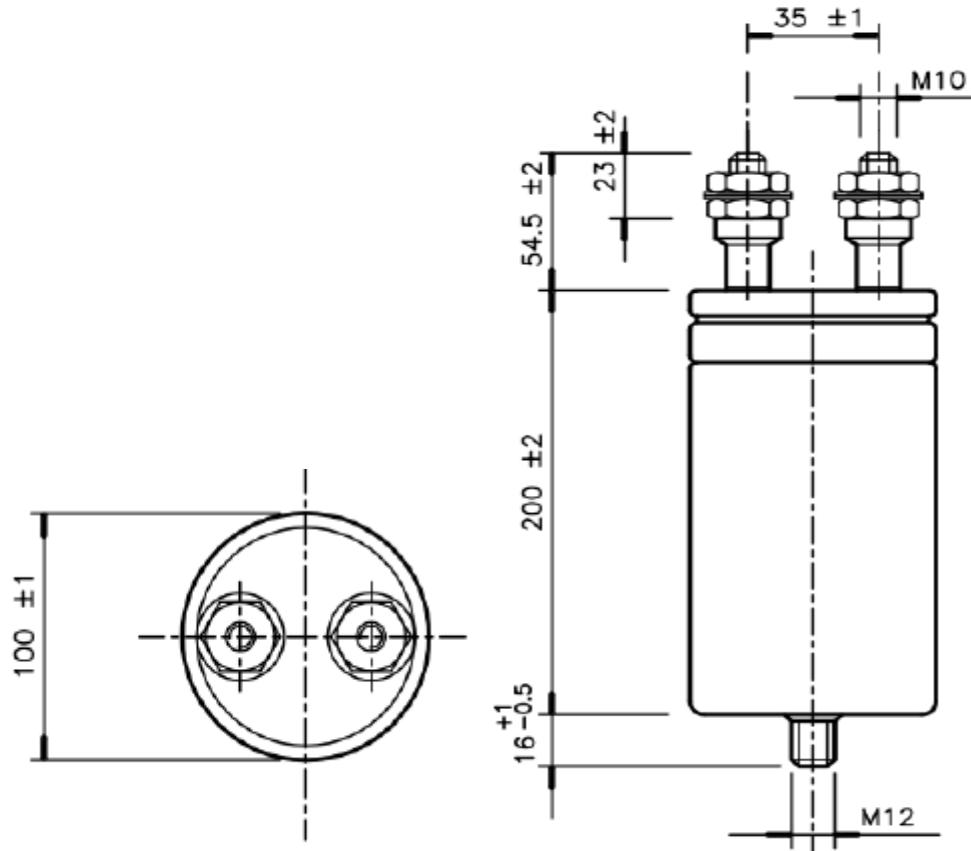

**Fig 2: Typical Dimensional Drawing**

COPYRIGHT AND CONFIDENTIAL

The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED.  
It must not be used directly or indirectly in anyway detrimental to the interest of the company.



A4 - 12

**PURCHASE SPECIFICATION FOR  
154 $\mu$ F SINEWAVE FILTER CAPACITOR  
GROUP: TRACTION ENGINEERING**

P.S NO. : PS4452653

REV. NO : 00

PAGE : 07 OF 08

## 7. Testing

List of tests to be performed on prototype as per IEC 61881 are as follows

Sl No	Test	Acceptance criteria	Type/Routine Test
1	Capacitance and Tan $\delta$ measurement	Measurements should be within the tolerances specified by the manufacturer	Type/Routine
2	Dimensional check	Dimensions to comply with the drawing	Type/Routine
3	Voltage test between terminals and case	During the test neither flashover nor puncture should occur.	Type/Routine
4	Voltage test between terminals	During the test neither flashover nor puncture should occur. Capacitance measured after the test should be within the range specified	Type/Routine
5	Surge discharge test	After conducting the test capacitance to be measured and the change should be < +/- 1%	Type
6	Thermal stability test and loss angle tangent measurement test	No breakdown of the capacitor should occur during the test. The capacitor losses should be measured after the test and should be within the tolerances specified by the manufacturer	Type
7	Self-healing test	Change of capacitance after the test should be < +/- 0.5%	Type
8	Resonance frequency measurement	The self-inductance measured should be within the tolerances specified by the manufacturer	Type
9	Environmental Test 1. Damp heat test 2. Change of temperature	Change of capacitance after the test should be < +/- 2%	Type
10	Mechanical tests 1. Mechanical tests of terminals 2. External inspection 3. Vibration and shocks	No mechanical damage should occur after the test.	Type
11	Endurance test	Change of capacitance after the test should be < +/- 3%	Type

COPYRIGHT AND CONFIDENTIAL  
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED.  
It must not be used directly or indirectly in anyway detrimental to the interest of the company.

		 A4 – 12	<b>PURCHASE SPECIFICATION FOR</b> <b>154<math>\mu</math>F SINEWAVE FILTER CAPACITOR</b> <b>GROUP: TRACTION ENGINEERING</b>	P.S NO : PS4452653  REV. NO : 00  PAGE : 08 OF 08
		<p><b>8. Rating plate</b></p> <p>The following information shall be given on the rating plate of each capacitor unit:</p> <ol style="list-style-type: none"> <li>1. Manufacturer</li> <li>2. Identification number and manufacturing date</li> <li>3. <math>C = \mu F</math></li> <li>4. Tol = %</li> <li>5. Rated Volatge = V</li> <li>6. <math>\theta_{\min} = {}^{\circ}C</math></li> <li>7. <math>\theta_{\max} = {}^{\circ}C</math></li> </ol> <p><b>9. Documentation</b></p> <ol style="list-style-type: none"> <li>1. Datasheet and Dimensional Drawing</li> <li>2. Type test Procedure, Type test Report</li> <li>3. Routine test Procedure, Routine test Report</li> </ol> <p><b>10. Acceptance</b></p> <ol style="list-style-type: none"> <li>1. Routine test report to be submitted along with each delivery</li> <li>2. Equipment shall be packed in a manner suitable for delivery and storage at the appointed delivery address. Transport packaging will provide adequate protection against accidental damage during normal handling. Terminals, leads, mounting brackets will be protected from mechanical damage</li> </ol> <p><small>COPYRIGHT AND CONFIDENTIAL The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED. It must not be used directly or indirectly in anyway detrimental to the interest of the company.</small></p>		