

REQUEST FOR QUOTATION



MMI:PU:RF:003

BHARAT HEAVY ELECTRICALS LIMITED
 Electronics Division
 PB No. 2606, Mysore Road Bangalore - 560026
 INDIA

RFQ NUMBER:

AKSPROP134

Due Date/Day: 02.02.2026 MON

Time : 13:00 HRS

RFQ DATE :
 21.01.2026

(address for communication) :

(for all correspondence)
 Purchase Executive : ABHISHEK
 Phone : 26998102
 Fax : 00918026989215
 E-mail: singh.abhishek@bhel.in

This RFQ is for entering into Rate contract (RC) with BHEL for the tendered item. Validity of the RC will be 1 year from the award of rate contract. Firm orders will be placed during the tenure of rate contract. Prices will remain firm till the validity of RC or till the completion of supplies against the Purchase Orders placed against this rate contract whichever is later. Please note that these quantities are projections based on the current business scenario and expected orders from customers. In the eventuality of business not coming through, BHEL is not obligated to exhaust the ordering of RC quantities.

Sl No.	Description	Qty	Unit	Delivery qty	Delivery Date
1	TI0668103531 HIGH VOLTAGE INDICATOR 48-4300VAC/DC * HSN/SAC : 3921 HIGH VOLTAGE INDICATOR 48-4300VAC/DC, CABLE 2.35 MT as per Specification No: PS4452541 rev 00, [REDACTED] As per Specification PS4452541 Rev No 00	900	NO	900	10.04.2026

Total Number of Items - 1

- 1.
- 2.

NOTES: For and On behalf of BHEL.

1. This RFQ is governed by:
 - a) INSTRUCTIONS TO BIDDERS/SELLERS and GENERAL CONDITIONS OF CONTRACT FOR PURCHASE available at <http://edn.bhel.com> (RFQ-PO Terms & Conditions)
 - b) Any other specific Terms and Conditions mentioned.

ABHISHEK
 Control Equipment

1 OF 1

* The HSN/SAC no mentioned against the line items in the RFQ are indicative only.

1. SCOPE

The Pre-Qualification Requirement document specifies the requirements to be met by the vendors (hereafter called Bidder) who wish to participate in the tender for supply of **High Voltage Indicator for rolling stock applications**.

This PQR should be read in conjunction with the Purchase Technical Specification **PS4452541 R00 dtd 21.12.2015**.

2. CREDENTIAL

- a) The Bidder should be Manufacturer or authorized dealer / supplier of – **High voltage Indicator** used in Rolling Stock applications. Documentary proof like relevant POs / invoice copies, valid authorization certificate etc shall be provided along with the offer.
- b) The Rolling Stock Applications under consideration shall include Locomotive, EMU, MEMU, Metro Trains, High Speed Trains, Train sets, Inspection Cars and Special Track Machines.
- c) For the vendors outside India, documentary proof for usage of the product in rolling stock applications shall be submitted. Acceptance of such certification shall be at BHEL's discretion.
- d) The Bidder should not be under the category of "hold" or "blacklisted" by any of the BHEL units/ any Govt of India PSU/ Govt of India/ statutory bodies of any state Govt as on date of bid submission. A declaration to this effect shall be submitted along with the offer.

3. QUALITY SYSTEM

- a) The manufacturer should have valid ISO 9001:2015 or latest certification covering the manufacturing and testing of the subject item
- b) The manufacturer should possess a clearly laid down quality Assurance Plan for the product covering the following aspects
Organization Chart, clearly indication the quality control set up
Qualification of key personnel and officials deployed in the quality control cell.
- c) Process Flow Chart indicating process of manufacture for an individual product or for a family of products, if the process is same.
- d) Quality Assurance System – Inspection and Testing plan to cover
 - Incoming material
 - Process control
 - Product control
 - System control
 - Testing facility
- e) Stage inspection details shall include the inspection procedure, inspection parameters, method of testing/ test procedure, sample sizes for destructive & non-destructive testing etc.
- f) Calibration scheme and status of calibration of test equipment
The process, testing and measuring equipment shall be duly calibrated by approved agency and the validity of calibration should be current.

4. GENERAL REQUIREMENTS

- a) It is preferred that the bidder is the manufacturer of this item. If the bidder is importing some portion of the components, then minimum value addition in India shall be 20%. Bidder to confirm this in the offer. Value addition less than 20% is not acceptable. A declaration to this effect shall be submitted along with the offer.
- b) The technical bid of bidders, which qualify technically but are not approved for the subject item by the Customer Approving Authority, shall be referred by BHEL to the customer Approving Authority for approval with intimation to the bidder. Consequent to the decision of Customer Approving Authority, the bidder shall be added to the vendor list of the subject item for future tenders. Concurrently BHEL shall consider placing developmental order on the bidder after accessing the capability of the bidder to manufacture / develop the subject item. However, BHEL shall treat the offer as "Not meeting" Pre-Qualification Criteria for the subject tender.
- c) The Customer Approving Authority shall be RDSO/CLW/BLW/PLW/ICF/RCF/MCF or any other agency as designated by the Customer.
- d) The bidder should possess a valid type test report, not older than five years, as per relevant standards mentioned in the specification with respect to time during the bid submission in case of catalog items. In case of custom made items, a bidder can submit the type test report of an item of similar or higher rating with a declaration for conducting the type test in case of award of order or developmental order. The bidder can also submit the test reports conducted in their own facility with the document of their lab accreditation. However, BHEL reserve it's right to insist on conducting the Type test again in a laboratory of it's choice.
- e) For the bid of vendors already qualified and appearing in BHEL's source list, the requirement of type test report and proof of supply shall not be applicable.

5. DOCUMENTATION TO BE SUBMITTED ALONG WITH OFFER

- a) Documentary proof for experience as per clause 2.a
- b) Clause by Clause compliance to the technical specification
- c) Declaration regarding status as per clause 2.d
- d) Declaration on MII (Make in India) as per clause 3.a
- e) Declaration for conducting Type Test as per clause 3.d



A4 - 12

PURCHASE SPECIFICATION
GROUP: TRACTION ENGINEERING

P.S NO. : PS4452541

REV. NO: 00

PAGE 01 OF 06

SPECIFICATION FOR HIGH VOLTAGE INDICATOR



Code No. TI0668103531

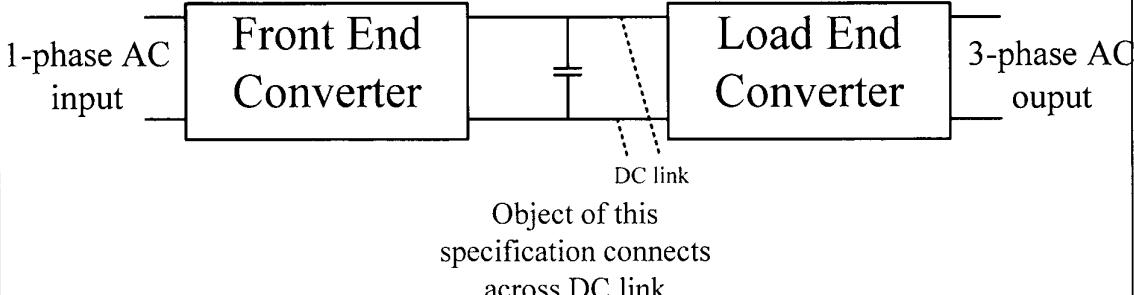


REVISION HISTORY SHEET

REV. NO.	DATE	NATURE OF CHANGE	REASONS	PREPARED BY	APPROVED BY
00	21.12.2015	FIRST ISSUE	—	B. Haribhushan	Shekar R.

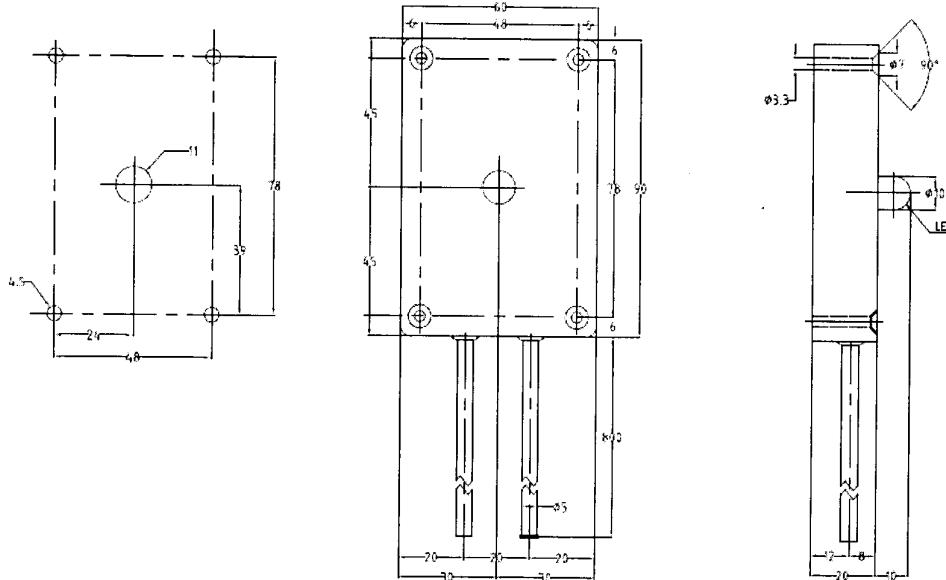

COPYRIGHT AND CONFIDENTIAL
 The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED.
 It must not be used directly or indirectly in anyway detrimental to the interest of the company.



REVISIONS	00	APPROVED BY		
		PREPARED BY	ISSUED BY	DATE




 B. Haribhushan
 TRACTION ENGG. 21.12.2015

 A4 - 10	PURCHASE SPECIFICATION GROUP: TRACTION ENGINEERING	P.S NO. : PS4452541 REV. NO: 00 PAGE 02 OF 06			
SPECIFICATION FOR HIGH VOLTAGE INDICATOR					
COPYRIGHT AND CONFIDENTIAL The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED. It must not be used directly or indirectly in anyway detrimental to the interest of the company.	1.0 Functional requirements: <p>This document covers specification of a High voltage indicator, to be used at the DC link of an IGBT based converter. The indicator will be mounted in a cabinet/enclosure and will be used in traction applications for on board mounting. The block diagram is shown below.</p> <div style="text-align: center; margin-top: 20px;">  <p>Object of this specification connects across DC link</p> </div>				
	2.0 APPLICATION : Indicating the DC voltage presence in traction equipment 3.0 TYPE : Dry Type, Air natural cooling 4.0 REFERENCE STANDARDS: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">IEC 60571</td> <td>Railway applications – Electronic equipment used on rolling stock</td> </tr> <tr> <td>IEC 62498-1</td> <td>Railway applications – Environmental conditions for equipment – Part 1: Equipment on board rolling stock</td> </tr> </table>		IEC 60571	Railway applications – Electronic equipment used on rolling stock	IEC 62498-1
IEC 60571	Railway applications – Electronic equipment used on rolling stock				
IEC 62498-1	Railway applications – Environmental conditions for equipment – Part 1: Equipment on board rolling stock				
REVISIONS 00	APPROVED BY  PREPARED BY 				
	ISSUED BY TRACTION ENGG.	DATE 21.12.2015			

 A4 - 11	PURCHASE SPECIFICATION GROUP: TRACTION ENGINEERING	P.S NO. : PS4452541	
		REV. NO: 00	
		PAGE 03 OF 06	
SPECIFICATION FOR HIGH VOLTAGE INDICATOR			
5.0 ENVIRONMENTAL CONDITIONS:			
COPYRIGHT AND CONFIDENTIAL The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED. It must not be used directly or indirectly in anyway detrimental to the interest of the company.	5.1 Ambient Temperature	: 55°C	
	5.2 Maximum Temperature	: 70°C (when locomotive standing dead under sun) 55°C (when locomotive working) 47°C Nominal	
	5.3 Relative Humidity	: Up to 95% relative humidity, any moisture condensation during operation shall not lead any damage or failure Yearly average \leq 75% Relative Humidity	
	5.4 Altitude	: Up to 1200 m above mean sea level	
	5.5 Atmosphere during hot weather:	Extremely dusty and desert terrain in certain areas. The dust concentration in air may reach a high value of 1.6mg/cub meter.	
	5.6 Air Pollution	: The equipment shall be designed to work in coastal area in humidity and salt laden corrosive atmosphere. The maximum values will be as follows (a) Maximum pH Value : 8.5 (b) Sulphate : 7mg/litre (c) Maximum concentrate of chlorine:6mg/liter (d) Maximum conductivity:230 μ Siemens/m	
	5.7 Climate	: Tropical, Hot and humid Climate	
6.0 ELECTRICAL REQUIREMENTS			
	6.1 Input voltage range	: 40 V to 4000 V DC or 40 V _{rms} to 4000 V _{rms}	
	6.2 Flashing frequency at 1 – 4 kV	: 2Hz +/- 10%	
	6.3 Input current	: < 5mA	
	6.4 Operating temperature	: -50°C to +70°C	
REVISIONS 00	APPROVED BY <i>[Signature]</i>		
	PREPARED BY <i>[Signature]</i>	ISSUED BY TRACTION ENGG.	DATE 21.12.2015

		 A4 - 11	PURCHASE SPECIFICATION GROUP: TRACTION ENGINEERING	P.S NO. : PS4452541 REV. NO: 00 PAGE 04 OF 06
SPECIFICATION FOR HIGH VOLTAGE INDICATOR				
7.0 CONSTRUCTION				
7.1 Housing: The PCB should be encapsulated in an housing made of Polyamide 6 with Glass reinforced material confirming to flame class V-0, as per the mechanical dimensions specified				
7.2 Termination: Termination should be done with electron beam irradiated cable of 3.6 kV class with 2.35 meter cable length (ex. Huber+Suhner AG Radox 9 GKW-AX)				
8.0 MECHANICAL DIMENSION LIMITATION The High voltage indicator dimensions (overall & mounting) shall not exceed the dimensions indicated in the below sketch. This sketch is given for guidance only for limiting dimensions				
				
Supplier to prepare detailed drawing & submit to BHEL for approval before commencing manufacturing process				
REVISIONS 00		APPROVED BY 		
		PREPARED BY 	ISSUED BY TRACTION ENGG.	DATE 21.12.2015

		 A4 - 11	PURCHASE SPECIFICATION GROUP: TRACTION ENGINEERING	P.S NO. : PS4452541 REV. NO: 00 PAGE 05 OF 06																					
SPECIFICATION FOR HIGH VOLTAGE INDICATOR																									
9.0 TESTS TO BE CONDUCTED AT SUPPLIER'S WORKSPACE																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3" style="text-align: center;">High Voltage Indicator</th> </tr> <tr> <th style="text-align: left;">Name of the test</th> <th style="text-align: center;">Type test</th> <th style="text-align: center;">Routine test</th> </tr> </thead> <tbody> <tr> <td>Visual Inspection</td> <td style="text-align: center;">Yes</td> <td style="text-align: center;">Yes</td> </tr> <tr> <td>Performance test</td> <td style="text-align: center;">Yes</td> <td style="text-align: center;">Yes</td> </tr> <tr> <td>Hot operation test</td> <td style="text-align: center;">Yes</td> <td style="text-align: center;">No</td> </tr> <tr> <td>Dielectric test</td> <td style="text-align: center;">Yes</td> <td style="text-align: center;">Yes</td> </tr> <tr> <td>Electrical endurance test</td> <td style="text-align: center;">Yes</td> <td style="text-align: center;">No</td> </tr> </tbody> </table>					High Voltage Indicator			Name of the test	Type test	Routine test	Visual Inspection	Yes	Yes	Performance test	Yes	Yes	Hot operation test	Yes	No	Dielectric test	Yes	Yes	Electrical endurance test	Yes	No
High Voltage Indicator																									
Name of the test	Type test	Routine test																							
Visual Inspection	Yes	Yes																							
Performance test	Yes	Yes																							
Hot operation test	Yes	No																							
Dielectric test	Yes	Yes																							
Electrical endurance test	Yes	No																							
<p>9.1 Visual Inspection Check of dimensions as per drawing.</p> <p>9.2 Performance test The Visual LED Indicator shall be checked at the minimum and maximum rated voltages (AC & DC) and the frequency of flashes noted to be within the specified limits.</p> <p>9.3 Hot operation test The test 9.2 shall be repeated at the maximum ambient temperature.</p> <p>9.4 Dielectric test A test voltage of 2 kV rms at power frequency for 1 minute shall be applied between the input terminals shorted and earth.</p> <p>9.5 Electrical endurance test The Visual LED Indicator shall be subject to the maximum rated voltage and kept on for 168 hours and test 9.2 shall be repeated at the end</p>																									
<p>10.0 TEST PROTOCOL Supplier shall submit test protocol for Routine & Type tests along with techno-commercial offer. List of tests are as per clause 5.0 of this specification.</p>																									
		REVISIONS 00	APPROVED BY 																						
		PREPARED BY 	ISSUED BY TRACTION ENGG.	DATE 21.12.2015																					

		 A4 - 11	PURCHASE SPECIFICATION GROUP: TRACTION ENGINEERING	P.S NO. : PS4452541 REV. NO: 00 PAGE 06 OF 06
SPECIFICATION FOR HIGH VOLTAGE INDICATOR				
11.0 DOCUMENTATION				
<p>11.1 Information required along with techno commercial offer without which offer is liable for rejection.</p> <p>11.2 Supplier shall furnish clause wise confirmation/comments to the technical specification in the typical format given below. Deviation, if any, shall be clearly brought out indicating the clause number, original specification, deviation sought with proper technical backup (catalogue, technical brochure, international standards, calculations etc. If no deviations required, then supplier shall furnish certificate indicating "NO DEVIATION REQUESTED" and we comply fully with all the technical requirements of this specification no.</p> <p>11.3 Supplier shall take a copy of this specification and sign on each page and submit the signed copy along with offer.</p> <p>11.4 Supplier shall furnish winding material, winding resistance, winding cross section.</p> <p>11.5 Supplier shall furnish the type of core used along with technical details of core.</p> <p>11.6 Information required after the placement of order</p> <p>11.7 Detailed dimensional drawing for BHEL approval</p> <p>11.8 Test protocol for BHEL approval.</p> <p>11.9 Information required along with material supply.</p> <p>11.10 Two sets of Test certificates.</p> <p>11.11 BHEL engineer witnessed Pre inspection report.</p>				
12.0 ACCEPTANCE				
<p>12.1 Dimensions as per approved drawing</p> <p>12.2 Routine test certificate</p> <p>12.3 Type test certificate</p>				
13.0 PRE-SHIPMENT INSPECTION				
<p>Pre-shipment inspection will be carried out by BHEL engineer as per the approved test protocol. BHEL engineers will witness Routine & Type tests before dispatch.</p>				
14.0 RATING PLATE DETAILS				
<p>14.1 BHEL Specification No.</p> <p>14.2 Input voltage range</p> <p>14.3 Serial number</p> <p>14.4 Month & Year of Manufacture</p> <p>14.5 Manufacturer Name</p>				
REVISIONS 00 APPROVED BY  PREPARED BY  ISSUED BY TRACTION ENGG DATE 21.12.2015				