TENDER SPECIFICATION

BHEL PSSR SCT 2146 for

Renovation of BHEL Guest House at Ashok Nagar, Chennai.


VOLUME -II PRICE BID



BHARAT HEAVY ELECTRICALS LIMITED

(A Government of India Undertaking)
Power Sector – Southern Region
BHEL Integrated Office Complex,
TNEB Road, Pallikaranai,
Chennai - 600100

TENDER SPECIFICATION CONSISTS OF

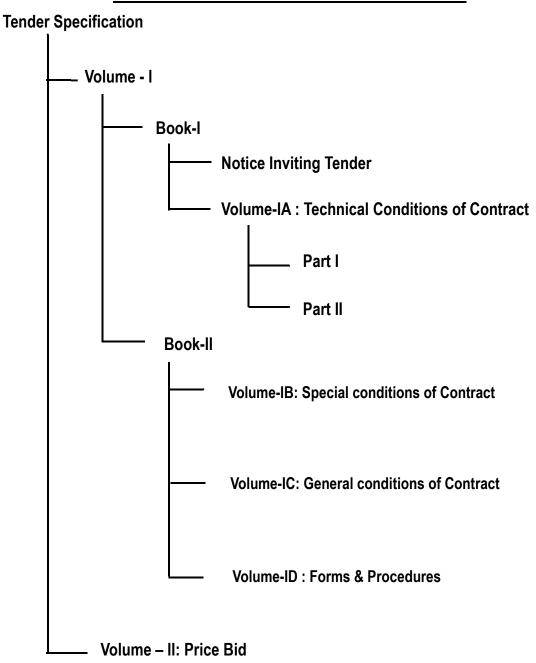

PRICE BID

CONTENTS				
Description	No. of pages			
Part A of Price Bid: Instructions to the Bidders	01			
Part B: Format for total amount (Enclosed as a separate Excel File in BHEL NIC e-Procurement portal for the subject tender)	(Separate Excel File)			
Part C: Bill of quantities with weightage for amount of each items with respect to the total quoted price	15			

PART A

Instruction to Bidders:

- 1. The quantity indicated in the BOQ in Part C of Price Bid is approximate only and is liable for variation. Payment will be as per actual quantity executed and as certified by BHEL Engineer.
- 2. Tenderers are requested to affix their company seal and authorized signature in all pages.
- 3. Bidders shall quote 'Total Amount' in the format enclosed as a separate Excel File in BHEL NIC e-Procurement portal for the subject tender and upload the same under 'Packet details > Tender covers -> Finance '(Cover Type Description Price Bid)' and same shall be taken into account for evaluation and awarding and hence, shall be complete in all respect for the full scope of work defined in specification and in accordance with terms & conditions of the tender. Any other entry elsewhere in the price bid shall be treated as Null and Void. Quoting of rates in any other form/formats will not be entertained.
- 4. The above mentioned 'Total amount' is for the entire Bill of Quantity (BOQ) given in Part -C of the Price Bid.
- 5. BHEL has pre-fixed the weightages for the amount of individual items of Bill of Quantity with respect to the 'Total Amount' in Part C of Price Bid.
- 6. Based on the pre-fixed weightages, the amount for the individual items of the Bill of Quantity shall be arrived at. This amount shall be rounded off to the nearest rupee.
- 7. Based on the quantities of individual item and the amount arrived in Sl. No: 6 above, unit rate of individual items shall be derived. This unit rate shall be rounded off to four decimal places.
- 8. Bidders to note that this is an item rate contract. Payment shall be made for the actual quantities of work executed as certified by BHEL Engineer.

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
1.0	Dismantling, clearing away and carefully stacking materials useful for re-use: Floor finish and dadooing walls in cement mortar with mosaic tiles / glazed tiles / cuddapah slabs		175	.0101032
2.0	Dismantling, clearing away and carefully stacking materials useful for re-use: Doors & windows including removal of frames, hinges and fastenings etc.	Sqm	17	.0016533
3.0	Dismantling RCC clearing away and carefully stacking materials	Cum	0.5	.0003085
4.0	Dismantling Brick / stone masonry in Cement mortar walls under 3m high clearing away and carefully stacking materials	Cum	2	.000569
5.0	Dismantling, clearing away and carefully stacking materials Pressed tiles & weathering course	Sqm	360	.022525
6.0	Cleaning the surface thoroughly and removing all the impurities and loose plaster of flacks and fungus etc. by suitable mechanical means like scrapping and or wire brushing and subsequently wash with adequate water. All the tiles joints groves will be refilled with pidicrete URP co polymer and acrylic polymer mixed with cement and fine sand mix 1:2:4 fill the surface cracks and apply one coat of acrylic polymer oil prime seal. Later then applying fitting with fiber glass mesh impregnated with 1ton GSM over that apply 2 coats of ROOF hyguard as finish FRP lining complete as directed by the Engineer Incharge.		410	.0381528
7.0	Weathering course in brick jelly lime concrete using broken brick jelly of size 20mm uniform gauge in pure slaked lime (no crushed stone sand to be used) to the proportion of brick jelly to lime being 32:12.5 by volume and laid over the RCC roof slab in a single layer of required slope and finished by beating the concrete with wooden beaters of approved pattern, keeping the surface constantly wet by sprinkling lime jaggery water, etc., complete as per standard specification and as directed by the departmental officers.		57	.0841672

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
8.0	Finishing the top of roof with one course of machine pressed tiles of size 230mm x 230mm x 20mm of approved quality set in Cement Mortar 1:3 (One Cement and Three Crushed stone Sand) 12mm thick mixed with water proofing compound conforming to ISS at 2% by weight of cement used and the joints pointed neatly to full depth of tiles with the same cement mortar mixed with red oxide and water proofing compound including curing etc., complete complying with standard specification and as directed by the Engineer Incharge	•	380	.1099806
9.0	Flooring with following ceramic tiles of size 305 x 305 x 6 mm laid over 20 mm thick cement mortar 1:3 (One Cement and Three Sand) base mortar over the existing slab / floor including cutting the tiles to the required size with special cutter wherever necessary, laying in position and pointing with white cement mixed with colouring pigment at the rate of 0.3 Kg. / sq.m. etc., complete complying with standard specification.	-	14	.0034687
10.0	Dadooing the wall with best approved first quality ceramic tiles of size 300x450x8mm set in CM1:2,10mm thick & pointed with white cement mixed with colouring pigments at the rate of 0.40kgper sqm finishing neatly & curing in all floors etc. complete as per std specifications	-	83	.0232998
11.0	Providing and Fixing of PVC Trims (Corner beeding) at the outer corner profiles of the tiles including cost of material, labour and handling etc. as directed by Engineer Incharge and as per standard specification.		50	.001043
12.0	Paving the floor with best quality Vertified Tiles of size 600 x 600 x 8mm of approved colour, shade and quality laid in cement mortar 1:3 (one cement and three crushed stone sand) 20mm thick in all floors and the top pointed with the white cement mixed same colour pigments etc., complete complying with standard specification.	•	90	.0256673
13.0	Solid PVC door shutters using 19 Gauge 19mm MS square tubes for styles and outer frames. 15mm MS square tubes for top, lock and bottom rails. The steel tubes shall be covered with 5mm thick solid PVC sheets. Shutter using 5mm thick solid PVC sheets for panelling shall rigidly fixed in position including necessary furniture and fittings. The over all size of styles shall be 50mm x 30mm. The over all size of top rail, Lock rail and bottom rail shall be 75mm x 30mm. The over all size of frames shall be 50mm x 45mm, with suitable rabate for housing the shutter.	-	8 SIGNATURE	.0040762 OF BIDDER WITH SEAL

	at DifeD 1 55K, TEK TOWERS, 110:11, Old Manabanpuram Koad, Ok			
Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
14.0	UPVC Ventilator Specification: Supplying and fixing UPVC (Un-Plasticized Polyvinyl Chloride) Louvered Ventilators of from the profile the size of outer frame 60mm x 58mm and shutter profile size of 60 x 78mm both profiles are reinforced with GI/1mm 125GSM and 100% corrosion free, the profile are multi chambered sections with wall thick of 2mm. The EPDM rubber (black colour) covered with all over the edges of frame and shutter. The corners and joints should be welded and cleaned. Radiations pin headed glass 4mm thick should be provided in the louvers. The window should be fixed to the wall with 100% packing with screws and silicon packing all round the frames.	•	2.2	.0018218
15.0	UPVC Window Specification: Supplying and fixing UPVC (Un-Plasticized Polyvinyl Chloride) Windows of casement type (open) from the profile the size of outer frame 60mm x 58mm and shutter profile are reinforcement with GI/1mm 125GSM and 100% corrosion free, the profiles are multi chambered sections with wall thick of 2mm. The EPDM rubber (black colour) covered with over all the edges of frame and shutter the shutter will be provided with Espag multi power point locks and also it operates as handle. The corners and joints should be welded and cleaned. Radiations free pin headed plain or brown colour glass 4mm thick should be provided to the shutter.	•	4	.0030159
16.0	Manufacturing supplying and fixing mosquito Fly proof mesh in a required shape and size fitting over the aluminium frame of powder coated size 2.5x1.5 inches with metal screw size of 2 inch drilled over this aluminium frame and aluminium powder coated door frame of size $3/4x1/2$ of equal leaves shudders fitted in the exsisting window and fitted with inches and handles for door opening and locking system as directed by Engineer Incharge.	_	2.2	.001217
17.0	Supplying and fixing of MS grill of approved desgin for grill gate grill works to doors and windows opening ramp etc using necessary mild steel for inner and outer members which should be fixed on edges including priming coat of best approved quality red oxide primer etc.complete		5.5	.0001906
18.0	Cement Concrete 1:5:10 (One Cement, Five crushed stone sand and Ten hard broken stone jelly) using 40 mm gauge hard broken granite stone jelly for foundation including dewatering wherever necessary and laid in layers of not more than 15 cm thick well rammed, consolidated and curing etc. complete complying with standard specification		1	.000991

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
19.0	Supplying and erecting centering for sides and soffits including necessary supports and strutting upto 3.29 M height for plane surfaces as detailed below in all floors with all cross bracings using Mild Steel sheets of size 90 x 60 cm and 10 BG stiffened with welded Mild Steel angle of size 25mm x 25mm x 3 mm for boarding laid over silver oak joists of size 10cm x 6.50 cm spaced at abote 90 cm centre to centre and supported by casurina props of 10cm to 13 cm dia spaced at not more than 75 cm centre to centre etc. complete complying with the standard specificaiton. (Payment for centering shall be given after the concrete is laid)			
a	For plane surfaces such as RCC floor slab, roof slab, beams, lintels, bed blocks, landing slab, waist slab, portico slabs and beams, etc.	Sqm	15	.0030698
20.0	Cement Concrete 1:2:4 (One Cement, Two crushed stone sand and Four hard broken stone jelly) using 20 mm gauge hard broken granite stone jelly for all RCC items of works excluding cost of reinforcement grill and fabricating charges, centering and shuttering but including laying, vibrating with mechanical vibrators, finishing, curing, etc. and providing fixtures like fan clamps in the RCC floor / roof slabs wherever necessary and bearing surfaces of walls, beams etc. shall be finished smooth with Cement Mortar 1:3 (One Cement and Three Sand) and kraft paper laid over it without claiming extra, etc., complete complying with standard specification and as directed by the Engineer Incharge			
a	Foundation & Basement	Cum	0.7	.0011458
b	Ground Floor	Cum	7	.0113111
21.0	Supplying, fabricating and placing in position Mild Steel / Ribbed Tor Steel grills for all RCC works as per design given including cost of steel and G.I. binding wire in all floors etc. complete complying with standard specification. (Contractor has to make his own arrangements for the supply of steel and binding wire)		1.8	.0311751
22.0	Brick work in following Cement Mortar using best quality II class Ground moulded chamber burnt bricks of size 9	Cum	11	.0143661

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
23.0	Plastering with Cement Mortar 1:5 (One cement and Five sand), 12mm thick in all floors including curing etc. complete complying with standard specification and as directed by the Engineer Incharge.		50	.0039923
24.0	Special ceiling plastering and finishing the exposed surface of all RCC items of work such as slabs, beams, sunshades, facia, canopy slab, staircase waist slab, landing slab etc., with Cement Mortar 1:3 (One Cement and Three Sand) 10mm thick including hacking the surfaces, providing cement mortar nosing, beading for sunshades, staircases, steps, landing slabs and curing, etc., in all floors complying with standard specification and as directed by the Engineer Incharge	_	5	.0004879
25.0	Supplying and laying of Interlocking Paver Block Stone 60mm thk. Over a base layer of crushed stone sandfilling incl. Cost of materials laying and Labour charges etc.,	Sqm	50	.0133018
26.0	Painting two coats of wall surface with ready mixed Interior plastic emulsion paint of first class quality and of approved colour including thorough scrapping, clean removal of dirt, and wherever required etc., complete complying with standard specification.		810	.0358403
27.0	Painting wood work with two finishing coats of synthetic enamel ready mixed paint of approved quality and colour over one coat priming coat in all floors including the cost of primer etc., complete complying with standard specification.	Sqm	1	.0000444
28.0	Supplying and fixing in position first quality and approved PVC Water tank 10000Ltr complete complying with standard specifications.	Nos	1	.0220081
29.0	Supplying and fixing in position best quality and approved make Indian made white / colour glazed earthernware wash hand basin of size 550 x 400mm (with pedestal / without pedestal) with a pair of cast iron brackets, including cost 15mm dia brass CP pillar tap, 32mm dia		29	.0246801
30.0	Supplying and fixing in position white / colour glazed European Water Closet of best quality and approved make with 100 mm	Nos	3	.006196
31.0	Supplying and fixing in position white / colour Wall Mounted Closet of best quality and approved make with 100 mm	Nos	15	.0403339
32.0	Supplying and fixing in position white / colour Floor Mounted Closet of best quality and approved make with 100 mm	Nos	2	.0053779

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
33.0	Supplying and fixing in position best quality PVC soil / waste pipes of various dia having 6 kg / sq.cm. pressure BIS mark and providing leak proof joints using PVC adhesives including fixing to the wall with special PVC / MS clamp, teak wood plugs, brass screws, etc., and making connection to all sanitary fittings, dismantling masonry / RCC works wherever found necessary and making the good dismantled portion to the original condition, including testing for any leakages, etc., complete complying with standard specifications. The rate for earth work excavation will be measured and paid separately in the cases where the pipe lines are proposed to laid below ground level			
a	75mm dia PVC Pipe	Nos	102	.0378068
b	110mm dia PVC Pipe	Nos	102	.0483431
34.0	Supplying and fixing in position PVC specials of the following dia and types of approved quality confirming to BIS and providing leak proof joints including fixing to the walls and giving connection to the PVC soil stacks, dismantling the masonry or RCC works and re-doing the dismantled portion to original condition etc., complete complying with standard specifications.			
a	75mm dia PVC Elbow	Nos	12	.0004999
b	75mm dia PVC Door Elbow	Nos	20	.0009026
С	110mm dia PVC Elbow	Nos	10	.000513
d	110mm dia PVC Door Elbow	Nos	20	.0011814
35.0	Supplying, laying and jointing UPVC pipes (having working pressure 10 kg. / sq.cm) of approved quality and best variety conforming to BIS of the following dia including cutting, threading and fixing UPVC specials using UPVC adhesives (but excluding cost of such specials) and fixing into wall with teak wood plugs, PVC clamps and screws making holes on the wall (or) drilling holes in the roof and making good the dismantled portion to original condition with necessary brick work / cement concrete and plastering neatly wherever necessary with necessary scaffolding charges upto 4 metre height above ground level, etc., complete complying with standard specifications.		SIGNATURE	OF BIDDER WITH SEAL

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
a	25mm dia UPVC Pipe	Rm	150	.0052477
b	40mm dia UPVC Pipe	Rm	120	.0066415
36.0	Supplying UPVC Specials (with working pressure 10 kg. / sq.cm.) in water supply arrangements (both in internal and external water supply arrangements			
a	25mm dia UPVC Coupler	Nos	30	.0003985
b	25mm dia UPVC Elbow	Nos	50	.0007281
С	25mm dia UPVC Tee	Nos	12	.0002148
d	40mm dia UPVC Coupler	Nos	25	.0006873
e	40mm dia UPVC Elbow	Nos	12	.000403
f	40mm dia UPVC Tee	Nos	8	.0003085
37.0	Plain Cement Concrete 1:2:4 (one cement, two sand and four hard broken stone jelly) using 20mm jelly for wearing coat including laying, compacting, finishing and curing, etc., complete as per standard specificatins and as directed by the Engineer Incharge.		15	.0177789
38.0	Supplying and fixing in position first quality and approved variety of Gun metal Gate Valve / Wheel Valve with BIS make of the following dia including cost of shellac, thread balls, etc., complete complying with standard specifications (for both internal and external water supply arrangements).			
a	25mm dia Gate Valve	Nos	34	.0058466
b	40mm dia Gate Valve	Nos	6	.0014227
39.0	Supplying and fixing in position 15mm dia brass CP screw down tap / Pillar tap (heavy duty) of approved make conforming to BIS specifications and quality including cost of shellac, thread, etc., complete complying with standard specification and including cutting and threading wherever necessary.		35	.0101417

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
40.0	Supplying and fixing in position CP shower rose with CP stop cock arrangement of size 15mm dia inlet and 100mm outlet to the pipe line with necessary cutting, threading and jointing using shellac etc., complete complying with standard specification and as directed by the Engineer Incharge.		27	.0073077
41.0	Supplying and fixing in position Indian make bevelled edge mirror of approved quality and brand PVC / Fibre Glass framed 600 x 450 x 5.5mm thick mirror, shelf type with hard board backing of approved colour fixed with brass screws, rawl plug, etc., complete complying with standard specification.		38	.009166
42.0	Supplying and fixing approved best quality brass CP towel rail 600mm long and 20mm dia with brackets of same materials including cost of teak wood plugs and CP screws, etc., complete complying with standard specifications.		44	.0081896
43.0	Supplying and fixing best approved best quality brass CP soap tray of size 150 x 150mm including cost of teak wood plugs, brass screws, etc., complete complying with standard specifications.		27	.002009
44.0	Supplying and fixing best approved best quality Wall Mixer including cost of teak wood plugs, brass screws, etc., complete complying with standard specifications.	Nos	20	.0158366
45.0	Supplying and fixing best approved best quality Stainless Steel Health Faucet including cost of teak wood plugs, brass screws, etc., complete complying with standard specifications.	Nos	27	.006295
46.0	Supplying and fixing best approved best quality SS Heavy Duty Long Body Tap 15mm including cost of teak wood plugs, brass screws, etc., complete complying with standard specifications.	Nos	27	.0058881
47.0	Supplying and fixing best approved best quality CP Angle Cock Tap including cost of teak wood plugs, brass screws, etc., complete complying with standard specifications.	Nos	85	.0119131
48.0	Supplying and fixing best approved best quality Toilet Tissue Roll Holder including cost of teak wood plugs, brass screws, etc., complete complying with standard specifications.		21	.0025115

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
49.0	Supplying and fixing position CI Nahani Trap / Floor Trap of the following sizes with best stainless steel gratings of approved brand and quality, fixed over a bed of brick jelly lime concrete 1:2:5 (One part of lime, two part of crushed stone sandand five part of 40mm gauge brick jelly) and finished with Cement Mortar 1:3 (One Cement, Three sand) including dismantling masonry works wherever found necessary and making good the dismantled portions to the original condition and giving connection to the CI / PVC pipes, etc., complete complying with standard specification.		71	.0114305
50.0	Providing and fixing stainless steel (Grade 304) railing made of Hollow tubes, channels, plates etc., including welding, grinding, buffing, polishing and making curvature (wherever required) and fitting the same with necessary stainless steel nuts and bolts complete, i/c fixing the railing with necessary accessories & stainless steel dash fasteners, stainless steel bolts etc., of required size, on the top of the floor or the side of waist slab with suitable arrangement as per approval of Engineer-in-charge, (for payment purpose only weight of stainless steel members shall be considered excluding fixing accessories such as nuts, bolts, fasteners etc.,		45	.0042009
51.0	MINERAL FIBRE BOARD Providing and fixing of Armstrong Dune/ Equivalent Microlook Mineral Fibre Ceiling Tiles in true horizontal level false ceiling grid of SILHOUTTE system manufacture by M/s. Armstrong world industries, US / UK using hot dipped galvanized steel section, exposed surface chemically cleaned capping prefinished in backed polyester paint main Tee of size 15 x 38 x 0.33mm at every 1200mm c/c max and rotary stitched cross tee of size 15 x 38 x 0.33mm at every 1200 c/c max and 15 x 22 x 0.457mm wall angle alround the wall to form grid size of 600mm x 600mm and suspending the grid using 2mm Gl rod and 6mm Nylon Rawl plug at every 1200mm intervals at the main tee and laying Armstrong Prima Fine Fissured Microlook Mineral Fibre Acoustic Ceiling tiles of size 600mm x 600mm x 15mm over the formed grid, manufactured by M/s. Armstrong World Industries US / UK. The false ceiling has to be carried out to the shape lines and levels as given in the drawing. The rate to include all the above. The False ceiling is to be erected in any shape in levels as shown in drawing. No extra cost is payable for difference in shape and levels. The measurement will be taken in flat / horizontal / linear alignment.		37	.0067064

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
52.0	Supply and Fixing flush doors (soild core) hardwood frame of size 100mm x 75mm Confirming to relevant IS Standard with flush shutter 32mm thick with internal lipping and manufactured in an approved make and approved by the Architect. The Flush Door will be resin bonded and formaldehyde, treated chemically against dampness, termite and other fungus. The rate to include cost of iron oxidised hinges 3nos 125mm long, Aluminium anodised tower bolt 3nos and 1 no door lock, etc. The internal surfaces should be painted with synthetic enamel paint of approved shade and other side is finished with 1mm thick laminate of approved shade and make as directed by the Engineer-in-charge.	-	21	.03112
53.0	WIRING INSIDE ROOM			
a	Rewiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable and 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable as earth wire in exisiting surface/recessed steel/PVC conduit inlcuding dismantling as required. (One Point one way) - (length upto 5 mtrs)		35	.0030169
b	Rewiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable and 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable as earth wire in exisiting surface/recessed steel/PVC conduit inlcuding dismantling as required. (One Point one way) - (length upto 10 mtrs)		25	.0023914
С	Rewiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable and 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable as earth wire in exisiting surface/recessed steel/PVC conduit inlcuding dismantling as required. (One Point one way) - (length upto 12 mtrs)		15	.0020138
d	Wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface/recessed medium class PVC Conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable etc as required. (One Point one way) - (length upto 5 mtrs)		5	.0007455

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
e	Wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface/recessed medium class PVC Conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable etc as required. (One Point one way) - (length upto 10 mtrs)	Nos.	3	.0005225
f	Wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface/recessed medium class PVC Conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable etc as required. (One Point one way) - (length upto 15 mtrs)	Nos.	3	.0006508
g	Wiring for twin control light point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, 2 way modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable etc as required. (Two point two way for staircase)		5	.0010939
54.0	CIRCUIT WIRING FOR AC/GEYER/REFRIGERATOR/OVEN/INDUCTION STOVE			
a	Wiring for AC/GEYER/REFRIGERATOR/OVEN/INDUCTION STOVE wiring alongwith earth wire with 2 X 6 sq. mm + 1 X 6 sq. mm of FRLS PVC insulated copper conductor, single core cable in surface/recessed medium class PVC conduit as required		75	.0066338
b	Rewiring for AC/GEYER/REFRIGERATOR/OVEN/INDUCTION STOVE point with 2 X 6 sq. mm + 1 X 6 sq. mm of FRLS PVC insulated copper conductor, in exisiting surface/recessed steel/PVC conduit inleuding dismantling existing conductor as required.		250	.0221126
55.0	CIRCUIT WIRING FOR 5A POWER SOCKET			
a	Wiring for 5A Power socket along with earth wire with 2 X 2 sq. mm + 1 X 2 sq. mm of FRLS PVC insulated copper conductor iin surface/recessed medium class PVC conduit as required	Mtrs.	250	.0138531

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
b	Rewiring for 5A Power socket along with earth wire with 2 X 2 sq. mm + 1 X 2 sq. mm of FRLS PVC insulated copper conductor in exisiting surface/recessed steel/PVC conduit inleuding dismantling existing conductor as required.	Mtrs.	500	.0277062
56.0	MODULES			
a	Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. (3 Module (100mmX75mm)) - for 5/6A & 15/16A switches & sockets	Nos.	25	.0012277
b	Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. (4 Module (125mmX75mm)) - 5/6A & 15/16A switches & sockets	Nos.	8	.0004119
c	Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. (6 Module (200mmX75mm)) - 5/6A & 15/16A switches & sockets	Nos.	18	.0010865
d	Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. (8 Module (125mmX125mm)) 5/6A & 15/16A switches & sockets		15	.0010226
57.0	SWITCHES			
a	Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. (5/6 amps switch)		150	.0010045
b	Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. (15/16 amp switch)		10	.0001458
С	Supplying and fixing following modular bell push switch on the existing modular plate & switch box including connections but excluding modular plate etc. as required.	Nos.	3	.0000365
d	Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. (3 pin 5/6 amp socket outlet)		60	.0007445

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
e	Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. (6 pin 5/15 amp socket outlet)		12	.0002482
f	Supplying and fixing following Telephone socket outlet modular type on the existing modular plate & switch box including connections but excluding modular plate etc. as required.	Nos.	8	.000107
g	Supplying and fixing following TV socket outlet modular type on the existing modular plate & switch box including connections but excluding modular plate etc. as required.	Nos.	3	.0000401
h	Supplying and fixing of two module stepped type electronic fan regulator on the existing modular plate & switch box including connections but excluding modular plate etc. as required	Nos.	15	.0008312
i	Supplying and fixing of modular blanking plate on the existing modular plate & switch box including connections but excluding modular plate etc. as required	Nos.	20	.0001201
58.0	CONDUITS			
a	Supplying and fixing of 20 mm medium class PVC conduit along with accessories in recess including cutting the wall and making good the same in case of recessed conduit as required.		70	.0013455
b	Supplying and fixing of 25 mm medium class PVC conduit along with accessories in recess including cutting the wall and making good the same in case of recessed conduit as required.		30	.0006532
С	Supplying and fixing of 32 mm medium class PVC conduit along with accessories in recess including cutting the wall and making good the same in case of recessed conduit as required.		30	.0008288
59.0	LIGHT FIXTURES			
a	Supplying and installing of 220V, 36W ceiling surface mounted type LED luminaire of Bajaj make BZSSQL 36L LED WH GX MT or equivalent.	Nos.	20	.0239777
b	Supplying and installing of 220V, 24W ceiling surface mounted type LED luminaire of Bajaj make BPSLR Surface 24W LED WH RD SD or equivalent. Page 13	Nos.	5	.0013702

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
c	Supplying and installing of 220V, 18W wall/ceiling surface mounted type LED luminaire of Bajaj make BGSLO Sleek Surface 18W WH SQ LED or equivalent.		7	.0019782
d	Supplying and installing of 220V, 4W wall mounted type LED luminaire of Havells make 1 N x 4 W T32 LED Filament Lamp or equivalent.	Nos.	7	.0059944
60.0	CIRCUIT BREAKER			
a	Supplying and fixing 5 amps to 32 amps rating, 240/415 volts,	Nos.	30	.0011532
b	Supplying and fixing 80A, Four pole, (Three phase and neutral), 415 volts, residual current circuit breaker (RCCB), having a sensitivity current upto 300 milliamperes in the existing MCB DB complete with connections, testing and commissioning etc. as required.		1	.0004313
С	Supplying and fixing 20A, Two pole, (single phase and neutral), 240 volts, residual current circuit breaker (RCCB), having a sensitivity current upto 300 milliamperes in the existing modular plate complete with connections, testing and commissioning etc. as required for Split AC.		7	.0021318
61.0	CLOSED CIRCUIT TELEVISION SYSTEM			
a	Supplying and installing Wall or ceiling mounted indoor type Fixed Dome IP Camera with 1/2.8 inch 2MP PS CMOS Image Sensor 2MP@25/30fps (1920x 1080), IR Range of 30 Mtrs,. The items inclluding necessary fixing accessories.	Nos	11	.0113038
b	Supplying and installing Wall mounted outdoor Bullet type IP Camera with with 1/3 inch 2MP PS CMOS Image Sensor 2MP @25/30fps (2560 x 1440), IR Range of 30 Mtrs, The items including junction box, front cover and all necessary fixing accessories.		3	.0031856
С	Supply, fixing and termination of high quality rack mounted type patch panel with one number of 24 port POE network switch, fixing frames, links and interconnections, necessary accessories etc., all complete as per specifications, drawings and / or as directed by the Engineer.		1	.0071505

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
d	Supplying and installing of 16 Channel Network Video Recorder with Max 320Mbps incoming bandwidth Smart H.265+/H.265/ Smart H.264+/H.264/MJPEG Up to 12MP resolution preview and playback Support 8 SATA HDDs up to 10TB Each, 4 USB (2 USB3.0, 2USB2.0) 2 HDMI / 2 VGA simultaneous video output Support Multi-brand network cameras Support RAID 0/1/5/10 Mobile Software: iCMOB, gCMOB CMS Software: KVMS Pro. The items including supply of 6TB hard disk, connectors, pins, Power Supply Unit and providing complete configuration etc.		1	.0219884
e	Supplying and installing of 43	Nos	1	.0064192
f	Online UPS Power supply 2 KVA with external batteries of capacity 5000 VAH or above to give minimum 2 Hrs. backup for entire load (with battery stand), Input Voltage: 160 V to 270V AC, Output Voltage: 230 V AC +/-1% Single Phase, Sine Wave, 50 Hz Short circuit protection, Over load prot		1	.0139687
62.0	SUPPLY OF MISC ITEMS			
a	Supply and installation of call bell of reputed make	Nos.	3	.0001182
b	Supply and installation of 2HP motor starter box of reputed make	Nos.	2	.0010067
TOTAL Weightage				0.9999942