

TENDER SPECIFICATION

BHEL: PSSR: SCT: 1996

FOR

Balance Civil & architectural works of the Coal Handling Plant area for Unit 1 & 2 (Package 1) including other miscellaneous works at 2X660 MW Udangudi Super Critical Thermal Power Project, Tuticorin District, Tamilnadu, India

VOLUME-II

PRICE BID



BHARAT HEAVY ELECTRICALS LIMITED

(A Government of India Undertaking)


Power Sector – Southern Region

Tek Towers, No. 11, Old Mahabalipuram Road
Okkiyam Thoraipakkam, Chennai - 600097

PRICE BID

TENDER SPECIFICATION CONSISTS OF

Techno-Commercial Bid

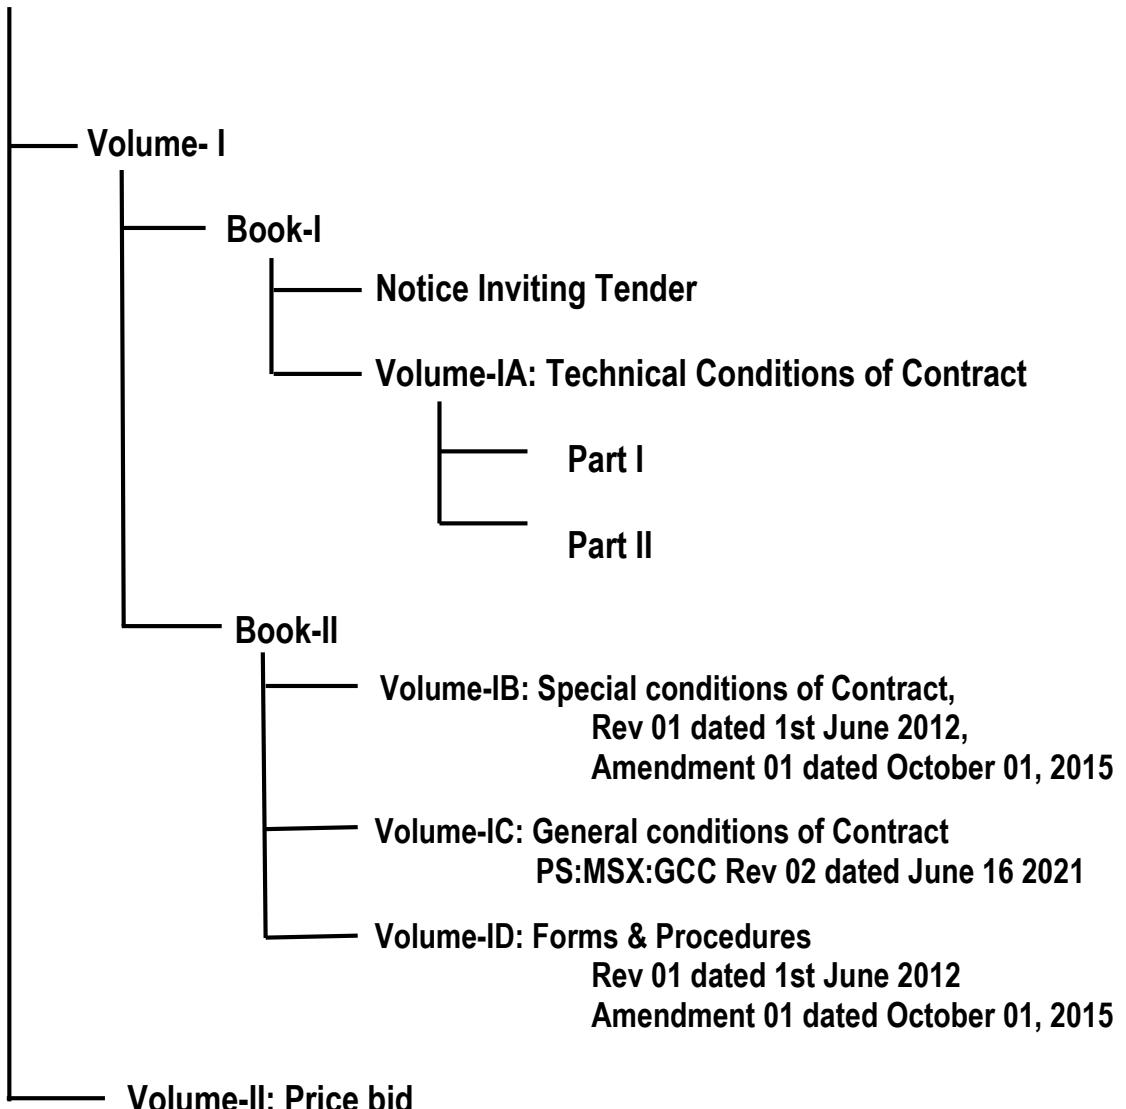

PRICE BID

| CONTENTS | |
|--|-----------------------|
| Description | No. of pages |
| Part A: Instructions to the Bidders | 1 |
| Part B: Format to quote total amount (Enclosed as a separate Excel File in BHEL NIC e-Procurement portal for the subject tender) | (Separate Excel File) |
| Part C: Bill of quantities with weightage for amount of each items w.r.t. the total quoted price | 52 |

PRICE BID

PART-A-INSTRUCTIONS TO BIDDERS:

1. The quantity indicated in the BOQ in Part C of Price Bid is approximate only and is liable for variation. Payment will be as per actual quantity executed and as certified by BHEL Engineer.
2. Tenderers are requested to affix their company seal and authorized signature in all pages.
3. Bidders shall quote 'Total Amount' in the format enclosed as a separate Excel File in BHEL NIC e-Procurement portal for the subject tender and upload the same under 'Packet details - > Tender covers -> Finance '(Cover Type Description – Price Bid)" and same shall be taken into account for evaluation and awarding and hence, shall be complete in all respect for the full scope of work defined in specification and in accordance with terms & conditions of the tender. Any other entry elsewhere in the price bid shall be treated as Null and Void. Quoting of rates in any other form/ formats will not be entertained.
4. The above mentioned 'Total amount' is for the entire Bill of Quantity (BOQ) given in Part -C of the Price Bid.
5. BHEL has pre-fixed the weightages for the amount of individual items of Bill of Quantity with respect to the 'Total Amount' in Part-C.
6. Based on the pre-fixed weightages, the amount for the individual items of the Bill of Quantity shall be arrived at. This amount shall be rounded off to the nearest rupee.
7. Based on the quantities of individual item and the amount arrived in SI No: 6 above, unit rate of individual items shall be derived. This unit rate shall be rounded off to four decimal places.
8. Bidders to note that this is an item rate contract. Payment shall be made for the actual quantities of work executed at the unit rate arrived at as per SI No.7 above.
9. The quantities given in the contract are tentative and may change to any extent (both in plus side and minus side). The derived item rates (as mentioned above) for individual items shall remain firm irrespective of any variations in the individual quantities. No compensation becomes payable in case the variation of the final executed contract value is within the limit of Minus (-) 30% of awarded contract value

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 100.0 | EARTH WORK: Earth work In excavation, backfilling and disposal including all labour, equipments etc complete as per specification, drawing and as directed by engineer- in-charge for the following. | -- | | |
| 101.0 | Earth work in excavation in all types of soil including ash which can be excavated by any means including setting out, levelling, dewatering (but excluding special type of dewatering viz. well point method), shoring & strutting (wherever required), dressing the sides & bottom, all lifts, ramming/compacting the excavated bottom, stacking, disposal of surplus excavated materials within a lead upto 500m, spreading/levelling of disposed materials etc all complete for following depths below ground level. | -- | | |
| a | Depth from ground level but not exceeding 2 m | CUM | 82,268 | .0089284 |
| b | Depth exceeding 2 m but not exceeding 4 m | CUM | 63,329 | .0086311 |
| c | Depth exceeding 4 m but not exceeding 6 m | CUM | 27,461 | .0046784 |
| d | Depth exceeding 6 m but not exceeding 8 m | CUM | 1,119 | .0002387 |
| e | Depth exceeding 8 m but not exceeding 10 m | CUM | 500 | .0001281 |
| f | Depth exceeding 10 m but not exceeding 15 m | CUM | 100 | .0000294 |
| 102.0 | Extra over ST No. 101 for dewatering of ground water by well point method as per IS 9759. | CUM | 95,000 | .0068194 |

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at
2x660MW Udangudi STPP**

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 103.0 | Earth work in excavation in soft rock (rock without any recovery of excavated materials in the form of hard stone/boulder) including weathered rock which can be excavated by means of crow bar, pick axe, pneumatic rock breaker attachment with excavator machine etc but does not require chiselling or blasting including setting out, levelling, dewatering (wherever required), shoring & strutting (wherever required), dressing the sides & bottom, all lifts, ramming/compacting the excavated bottom, stacking, disposal of surplus excavated materials within a lead upto 500 m, spreading / levelling of disposed materials etc all complete for following depths below ground level. | -- | | |
| a | Depth from ground level but not exceeding 2 m | CUM | 1,030 | .0001663 |
| b | Depth exceeding 2 m but not exceeding 4 m | CUM | 1,030 | .0001997 |
| c | Depth exceeding 4 m but not exceeding 6 m | CUM | 3,690 | .0008583 |
| d | Depth exceeding 6 m but not exceeding 8 m | CUM | 2,644 | .000738 |
| e | Depth exceeding 8 m but not exceeding 10 m | CUM | 10 | .0000032 |
| f | Depth exceeding 10 m but not exceeding 15 m | CUM | 10 | .0000036 |
| 104.0 | Earth work in excavation in hard rock requiring blasting (but excluding controlled blasting) including wedging, line drilling, pre shearing etc as required, setting out, levelling, dewatering (wherever required), dressing the sides & bottom, all lifts, necessary licenses/statuatory clearances for blasting, supply, storage & handling of blasting materials, stacking/disposal of surplus excavated material within a lead upto 500m, spreading / levelling of disposed materials etc all complete for following depths below ground level. | -- | | |
| c | Depth exceeding 4 m but not exceeding 6 m | CUM | 230 | .0001059 |
| d | Depth exceeding 6 m but not exceeding 8 m | CUM | 5 | .0000027 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| e | Depth exceeding 8 m but not exceeding 10 m | CUM | 5 | .0000031 |
| f | Depth exceeding 10 m but not exceeding 15 m | CUM | 5 | .0000035 |
| 105.0 | Earth work in excavation in hard rock requiring controlled blasting including wedging, line drilling, pre shearing etc as required, setting out, levelling, dewatering (wherever required), shoring & strutting (wherever required), dressing the sides & bottom, all lifts, necessary licenses/statutory clearances for blasting, supply, storage & handling of blasting materials, stacking/disposal of surplus excavated material within a lead upto 1 Km, spreading / levelling of disposed materials etc all complete for following depths below ground level. | -- | | |
| a | Depth from ground level but not exceeding 2 m | CUM | 10 | .0000033 |
| b | Depth exceeding 2 m but not exceeding 4 m | CUM | 10 | .000004 |
| c | Depth exceeding 4 m but not exceeding 6 m | CUM | 213 | .0001021 |
| d | Depth exceeding 6 m but not exceeding 8 m | CUM | 10 | .0000057 |
| e | Depth exceeding 8 m but not exceeding 10 m | CUM | 10 | .0000066 |
| f | Depth exceeding 10 m but not exceeding 15 m | CUM | 10 | .0000073 |
| 106.0 | Earth work in excavation upto any depth below ground level in hard rock requiring chiselling including wedging, line drilling, pre shearing etc as required for grading, setting out, levelling, dewatering (wherever required), dressing the sides & bottom, all lifts, stacking/disposal of surplus excavated material within a lead upto 1 Km, spreading / levelling of disposed materials etc all complete as per specification, drawing and as directed by the engineer-in-charge. | -- | | |
| d | Depth exceeding 6 m but not exceeding 8 m | CUM | 5 | .0000151 |
| e | Depth exceeding 8 m but not exceeding 10 m | CUM | 5 | .0000174 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| f | Depth exceeding 10 m but not exceeding 15 m | CUM | 5 | .0000191 |
| 107.0 | Earthwork in Back filling upto any depth below ground level around foundations, plinths, trenches, drains etc to proper grade and level in layers not exceeding 250 mm thickness using/with selected materials from compulsorily excavated earth available within a lead upto 500m and compacted as specified including re-excavation of stacked earth, watering, ramming/compaction by manual/mechanical means, dressing etc all complete for the following. | -- | | |
| Aa | Each layer compacted so as to achieve at least 98% maximum dry density as per IS-2720 (Part-VII) | CUM | 226,095 | .0239669 |
| 109.0 | Extra over ST No. 101 and 103 to 108 for carriage of material/earth for every 500m or part thereof beyond an initial lead of 500m. | -- | | |
| a | Carriage for stacking/ backfilling of serviceable material/ earth (TO BE STACKED & USED FOR GRADING & LEVELING OF THIS PKG FROM NGL TO FGL) | CUM | 4,775 | .0000482 |
| b | Carriage for disposal of serviceable/unserviceable material/ earth (TO BE STACKED & USED FOR GRADING & LEVELING OF GREEN BELT AREA FROM NGL TO FGL) | CUM | 22,872 | .0002309 |
| 111.0 | Supplying and filling sand upto any depth under floors, around foundations, plinths etc. in layers not exceeding 250 mm thickness and compacted so as to achieve at least 80% relative density as per IS-2720 (Part-XIV) including spreading, watering, ramming/compaction by manual / mechanical means, dressing, royalty (if any) etc. all complete. | CUM | 175 | .0003317 |
| 200.0 | Providing and placing concrete work including cost of labour, materials and equipment for handling, transportation, batching, mixing, placing, vibrating and curing, (excluding cost of centering, shuttering and reinforcement) with mechanised equipments like batching plant, transit mixer, concrete pump etc. complete as per drawing, specifications and as per direction of engineer in charge for the following. Cement will be supplied by BHEL as a free issue | -- | | |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 201.0 | Concrete of grade M7.5 (1 part cement, 4 part sand, 8 parts of 40 mm graded aggregate by volume) as mass filling course, lean concrete, levelling course, mud mat under and around foundations/floors, at any depth below finished floor level etc. | CUM | 5,928 | .0186722 |
| 202.0 | Concrete of grade M10 (1 part cement, 3 part sand, 6 parts of 40 mm graded aggregate by volume) as lean concrete, levelling course, mud mat under and around foundations/floors at any depth below finished floor level etc | CUM | 1 | .0000031 |
| 203.0 | Concrete of grade M15 (1 part cement, 2 part sand, 4 parts of 40 mm graded aggregate by volume) as lean concrete, levelling course, mud mat under and around foundations/floors at any depth below finished floor level etc | CUM | 1 | .0000031 |
| 204.0 | Concrete under floors, paving, plinth protection, pipe encasing etc complete with 20 mm nominal size graded aggregate at any depth below finished floor level for the following grades. | -- | | |
| b | M20 Grade | CUM | 11,401 | .0351342 |
| 205.0 | Providing and laying Design Mix cement concrete conforming to IS:456 & IS 10262-2009 for reinforced concrete works with coarse sand and graded hard stone aggregate of 20mm nominal size in foundations/substructure, grade slab, paving, drains, under floors etc at all level below finished floor level, any shape, position or thickness etc complete including use of plasticizer/ superplasticizer conforming to IS:9103 (latest) to achieve required slump in concrete all complete as per specification & drawing for the following. | -- | | |
| a | M 25 Grade | CUM | 3,000 | .0106269 |
| b | M 30 Grade | CUM | 18,906 | .0669705 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 206.0 | Providing and laying Design Mix cement concrete of grade conforming to IS:456 & IS 10262-2009 for reinforced concrete works with coarse sand and graded hard stone aggregate of 20mm nominal size in superstructure at all level above finished floor level, any shape, position or thickness etc complete including use of plasticizer/superplasticizer conforming to IS:9103 (latest) to achieve required slump in concrete all complete as per specification & drawing for the following. | -- | | |
| b | M 30 Grade | CUM | 10,890 | .0383694 |
| A206 | Providing and laying Design Mix cement concrete of grade conforming to IS:456 & IS 10262-2009 for reinforced concrete works with coarse sand and graded hard stone aggregate of 20mm nominal size in superstructure at all level above finished floor level, any shape, position or thickness etc complete including use of plasticizer/superplasticizer conforming to IS:9103 (latest) to achieve required slump in concrete all complete as per specification & drawing for the following. | -- | | |
| a | M 20 Grade | CUM | 10 | .0000308 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 208.0 | Providing and laying Design Mix cement concrete as per IS:456 & IS 10262-2009 of grades mentioned below for reinforced concrete works using graded aggregate in top decks of all machine foundations supported on vibration isolation system (excluding supply and installation of vibration system) and top deck of TG foundation at all levels including addition of suitable plasticizers conforming to IS9103 to achieve a slump more than 125 mm in concrete as per manufacturers recommendation, preparation of scheme for concreting, getting it approved by engineer, labour, materials, equipment, handling, batching, transporting, mixing, pumping, placing, leveling, vibrating, compacting, curing, testing, cleaning and rendering the exposed surface with cement sand mortar to give a smooth and even surface, maintaining and submitting records of concreting, petrographic examination and potential reactivity of aggregate etc. all complete as per specification, drawing and instructions of engineer, including UPV testing as directed by engineer in charge, rectification of the defects in concreting observed by ultra-sonic pulse velocity (UPV) testing by cement/epoxy grout etc, but excluding formwork, staging, reinforcement, embedments and temperature control of concrete. Payment terms - a) After casting 75% ; b) After receipt of ultrasonic test report - 25%. | -- | | |
| b | M 35 Grade | CUM | 150 | .0008142 |
| 209.0 | Extra over St. No. 205 to 208 for controlling of temperature of fresh concrete to less than 23 degree centigrade using ice, including all related arrangements for providing, storing and mixing of ice with water, cooling of aggregates etc. All complete as per specification, drawing and instruction of engineer in charge. | CUM | 150 | .0001569 |
| 211.0 | Providing and encasing of structural steel member with concrete using nominal aggregate size of 12.5mm down. Encased member shall be wrapped with welded wire mesh/chicken wire mesh with proper lap etc. complete as per specification for the following grades. (cost to include welded wire mesh, chicken wire mesh also). | -- | | |
| a | M 20 | CUM | 34 | .0001071 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 212.0 | Screed concrete conforming to IS 456 with coarse sand and graded hard stone aggregate 12.5mm/6 mm nominal size on the roof at all level or thickness, drains etc complete as per following. | -- | | |
| a | 1:2:4 grade | CUM | 80 | .000252 |
| b | 1:1:2 grade | CUM | 50 | .0001756 |
| 213.0 | Providing and laying Design Mix cement concrete as per IS:456 & IS 10262-2009 for reinforced concrete works using graded aggregate for Concrete in precast works like roof slabs/trench covers, fins, lintels, chajas, beams, columns, wall panels, facias etc. at all levels in all kinds of work including formwork/moulds, curing, rendering the top exposed surface with cement sand mortar (1:3), handling, storing, transpoting, all leads, erection without damage, setting in position with cement sand mortar (1:3), filling the gaps between adjacent precast units with M30 grade concrete or cement sand mortar (1:3) and including making of holes for bolts for fixing, welding etc. complete with graded aggregate (20/12.5/10 mm) and as per specification and drawing for following grades. | -- | | |
| a | M25 | CUM | 254 | .0015395 |
| 214.0 | Providing and laying Design Mix cement concrete as per IS:456, IS 3370 & IS 10262-2009 for reinforced concrete works using graded aggregate for Concrete in water retaining/conveying structures including addition of suitable plastisizer cum waterproofing cement additives confirming to IS 9103 latest to achieve a slump more than 125 mm in concrete as per manufacturers recommendation and conforming to limits of permeability as per IS 2545 and specification with 20 mm nominal size graded aggregate for following grades. Watertightness is to be ensured including structural grouting if required. | -- | | |
| b | M30 | CUM | 20 | .0001 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 215.0 | Dismantling concrete work for all types of structures at all levels including stacking of servicable material to a lead of 500 m and disposal of unservicable material upto a lead of 2 km, cutting of reinforcement, labour, equipment, safety precautions etc all complete as per drawings, specification and instructions of engineer in charge. | -- | | |
| a | Plain cement concrete of all grades | CUM | 2 | .0000018 |
| b | Reinforced cement concrete of all grades | CUM | 2 | .0000026 |
| 216.0 | Chipping of concrete in reinforced concrete work, cutting pockets, making openings at all levels and according to shapes, disposal of waste materials upto a lead of 2 km as directed by engineer including equipment, safety precautions, making good the broken surface etc all complete as per specification, drawing, instructions of engineer in charge but excluding cutting of reinforcement . | CUDM | 2 | .0000002 |
| 217.0 | Extra over and above St No 216 for cutting of reinforcement, all sizes and types including labour, equipment, return of cut reinforcement to store etc all complete as per specification, drawings and instructions of engineer in charge. Measurement shall be on the cross sectional area of reinforcement cut. | SQCM | 2 | .000000011 |
| 218.0 | Cutting Reinforced concrete with mechanised tools like Core drilling machine etc. for cutting pockets, holes, cores in slab, beam, column or foundation as per direction of engineer in charge. | CUDM | 2 | .0000005 |
| 223.0 | Cutting of existing concrete/ RCC slab (total thickness upto 250mm including floor finsih & deck sheet if any) inside control room/ pump house or anywhere inside boundary using power tools of (DD2E of HILTI/ BOSCH make or equivalent) with low noise and dust including cutting reinforcements, removing the rubbish within a lead of 1 km, including making good the broken edges/ surface with cement mortar, painting, finishing to match with existing finishing, scaffolding/ supporting at all level, all complete and as directed by Engineer (measurements shall be taken as per cutting surface area). | SQM | 43 | .0001077 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 300.0 | FORMWORK: Providing, fixing and removing formwork at all elevations for all structures, as per specifications and including all labour, material, scaffoldings and centereing etc. complete as per drawing, specifications and as per direction of engineer in charge for the following. | -- | | |
| 301.0 | Fairface form work with good quality water proof ply wood of minimum 12mm thickness and smooth surface below finished ground floor level for foundations, footings, base of columns, walls, columns, pilasters, beams, mass concrete, trenches etc.including chamfering of edges as per drawing, specification and instruction of engineer in charge.. | SQM | 37,370 | .0220705 |
| 302.0 | Fairface form work with good quality water proof ply wood of minimum 12mm thickness and smooth surface above finished ground floor level for columns, beams, suspended floors, roofs, lintels, cantilevers, staircases, landings, balconies, etc. including chamfering of edges as per drawing.for all heights as per specification, drawing and instruction of engineer in charge. | SQM | 26,449 | .0188248 |
| 304.0 | Providing, fixing and removing formwork in block-outs/pockets and openings (below 0.1 sqm plan area) at all elevations including cutting, formation of all shapes and all other operations required for making the required shape and size all complete as per specification, drawing and instruction of engineer in charge. | -- | | |
| a | Upto 150 mm depth | Each | 489 | .0001252 |
| b | Pockets of depths more than 150mm and upto 300 mm depth | Each | 187 | .0000831 |
| c | Pockets of depths more than 300mm and upto 600 mm depth | Each | 210 | .0001707 |
| d | Pockets of depths more than 600mm and upto 1000 mm depth | Each | 195 | .0002517 |
| e | Pockets of depths more than 1000mm and upto 1500 mm depth | Each | 180 | .0003385 |
| f | Pockets of depths more than 1500mm and upto 2000 mm depth | Each | 175 | .0004353 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| A305 | Extra over item no.301 and 302 for curved form work for foundations, footings, beams, columns, walls, trenches, domes, arches etc as per specification. | -- | | |
| -- | Extra for Curve Shuttering for Item No. 301 | SQM | 10 | .0000012 |
| 400.0 | REINFORCEMENT WORK : Reinforcement work including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling etc at all level as per specification, drawings and as directed by engineer - in - charge. | -- | | |
| 403a | Transportation, straightening, cutting, bending, placing in position at all level, binding in position of steel reinforcements of corrosion resistant steel of grade Fe-500D or 500EQR confirming to IS:1786 including cost of binding wire, labour, scaffolding, transportation to & from stores etc complete all as per specifications, drawings and as directed by Engineer.(BHEL to supply steel free of cost) | MT | 3,915 | .0512333 |
| 500.0 | Roof Treatment works: Roof treatment works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, curing, sampling, testing etc at all level as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 501.0 | Providing and laying underbed grading plaster with cement mortar 1:4 (1 cement : 4 sand) and average thickness of 25 mm including preparation of surface, batching, mixing, leveling etc. all complete. | SQM | 100 | .0000126 |
| 506.0 | Providing and applying PU based water proofing treatment with one coat of polyurethane or any other equivalent material based primer with an application rate of minimum 6 sq.m per litre and two successive liquid coatings of high solids content urethane pre-polymers or equivalent material based finish coats as per relevant IS/ASTM standards to form an elastomeric membrane with overall dry film thickness 1.5 mm subject to minimum 500 gm/sqm/coat application rate. Item includes surface preparation, polyscrim cloth /fabric, polymerised mortar base preparation, etc all complete as per specifications and directions of engineer in charge. | SQM | 600 | .0005527 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 508.0 | Providing and laying wearing course consisting of 40mm thick plain cement concrete of grade M15 (1:2:4) with graded aggregate of 12.5mm size cast in panels of maximum size 1.2mx1.2m and reinforced with 0.56 mm dia. galvanised chicken wire mesh and sealing of joints (in grooves of 6mm X 6mm) using silicon /elastomeric compound etc all complete. | SQM | 600 | .0002847 |
| 509.0 | Providing and laying wearing course consisting of 25mm thick plain cement concrete of proportion M20 (1:1.5:3) with graded aggregate of 12.5mm size cast in panels of maximum size 1.5mx1.5m and reinforced with 0.56 mm dia. galvanised chicken wire mesh and sealing of joints (in grooves of 6mm X 6mm) using silicon /elastomeric compound etc all complete. | SQM | 60 | .0000255 |
| 510.0 | Providing and laying cement concrete chequered flooring tiles of 22 mm thickness and size 300x300 mm conforming to IS 13801 with 8 mm thick 1:4 cement mortar over the top most layer of roofing treatment in pathway or entire area with fine joints including sealing of joints (silicon/elastomeric sealant) and providing expansion gap in both directions including underbed(as per drawings) filled up with (silicon/elastomeric) joint sealant etc all complete. (Water proofing paid elsewhere)(including cost of cement for tiles making) | SQM | 10 | .0000056 |
| 511.0 | Providing & applying two coats of bitumen grade 85/25 as per IS 702 (@ 1.7 kg/sqm) with 1% antistripping compound conforming to IS 6241 in foundation, wall, column etc. on concrete surfaces exposed to soil/ash including surface preparation etc. all complete. | SQM | 57,000 | .0104462 |
| 513.0 | Providing and mixing water proofing compound conforming to IS:2645 in concrete or cement mortar all complete. | KG | 1 | .0000001 |
| 514.0 | Providing and applying concrete structures two coats of ERPB (Epoxy resin based anticorrosive and chemical resistant paint) over a coat of CPC1 (concrete penetrating bipolar corrosion inhibitor) with 300 to 325 micron DFT for protection of concrete against carbonation and chloride penetration in saline/marine environment all complete of approved make and as per manufacturer's recommendation | SQM | 5 | .0000009 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 517.0 | Providing and laying foam concrete blocks in the toilets/sunken slab etc. complete as directed by engineer in charge. | cum | 5 | .0000122 |
| A516 | Provideing and applying Heay duty water proofing as per IS 1346 of approved make and as per manufacturers recommendation. | SQM | 3,075 | .0008033 |
| 600.0 | JOINTS AND FILLERS: Joints & fillers including all labour, material, equipment, transportation, handling etc at all level as per specification, drawings and as directed by engineer - in - charge. | -- | | |
| 601.0 | Supplying & installation of bitumen impregnated fibre board confirming to IS 1838 as joint filler at joints in concrete including nailing, coating of both faces with coal tar pitch/bitumin etc. all complete. | -- | | |
| c | 25 mm wide joints | SQM | 213 | .0001795 |
| d | 50 mm wide joints | SQM | 113 | .0001165 |
| 603.0 | Providing and applying polysulphide based sealant conforming to IS:12118 in joints in concrete including cleaning of joints, raking out groove, application of primer, scaffolding etc. all complete for following size grooves: | -- | | |
| c | 25mmX25mm | RM | 213 | .00015 |
| d | 50mmX25mm | RM | 118 | .0001591 |
| 604.0 | Supplying and filling in position hot applied bitumin sealing compund (Grade A) confirming to IS 1834 including cleaning, mixing, heating, pouring/injecting sealing compound in gaps in joints including application of primer etc. all complete. | -- | | |
| a | 10mm X 40mm | RM | 18 | .0000009 |
| b | 12mm X 25mm | RM | 18 | .0000008 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 606.0 | Providing and installing PVC joint sealing strips of minimum 3mm thickness and minimum width 100 mm at the construction, expansion and isolation joints from reputed manufacturers as a continuous diaphragm to contain the filler material and/ or to exclude passage of water or any other material into or out of the structure, without any longitudinal joint; and shall be procured and installed in largest practicable lengths having a minimum number of transverse joints with jointing procedure as per the manufacturer's recommendations including the material and tools required for jointing, testing, protection, etc all complete. The joints in rubber seals shall be vulcanised as needed. | RM | 18 | .000002 |
| 607.0 | Providing and installing strong and tough alkathene sheet or equivalent of about 1 mm in thickness in isolation joints and shall be fixed by an approved adhesive compound on the cleaned surface of the already set concrete as per the manufacturer's recommendations, to cover it fully including the material and tools required for jointing, testing, protection, etc all complete. | SQM | 18 | .0000017 |
| 608.0 | Supplying and filling in position hot applied bitumin sealing compound (Grade B) confirming to IS 1834 including cleaning, mixing, heating, pouring/injecting sealing compound in gaps in joints including application of primer etc. all complete. | -- | | |
| b | 12mm X 25mm | RM | 13 | .0000007 |
| c | 20mmX25mm | RM | 13 | .0000011 |
| 610.0 | Providing and fixing PVC water stops in joints conforming to IS 12200 & IS 15058 all complete for the following: (Bulb or Kicker type) | -- | | |
| b | 230 mm wide and 8 mm thick | RM | 5 | .0000014 |
| d | 230 mm wide and 6 mm thick | RM | 5 | .0000021 |
| 611.0 | Providing and fixing copper water stops in joints of deep underground structure all complete for the following: | -- | | |
| b | 230 mm wide and 8 mm thick | RM | 5 | .0000061 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 613.0 | Providing and fixing G.I strips minimum 1.5mm thk and 150mm wide including fixing accessories etc. all complete. | Kg | 18 | .0000024 |
| 614.0 | Providing and fixing aluminium strips minimum 18 SWG thk and 300mm wide over expansion joints with minimum lap of 50mm length including brass / aluminium screws, rawl plugs etc. all complete. | Kg | 18 | .000007 |
| 615.0 | Providing and fixing 300 mm wide Stainless steel strips over expansion joints with minimum lap of 50mm length including stainless steel screws, rawl plugs etc. all complete. | Kg | 18 | .0000075 |
| 700.0 | MS EMBEDMENTS: Embedments including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling etc. at all level as per specification, drawings and as directed by engineer - in - charge. | -- | | |
| 701.0 | Supply, fabricating and fixing of mild steel embedments, inserts, pipe sleeves, angle pieces, rungs of various diameters, plates of dimensions as required etc. including welding, bolting, cutting, drilling, scaffolding, setting etc. all complete. | MT | 2 | .0001533 |
| 702.0 | Supply, Fabrication, transportation, delivery at site and erection, installation and alignment of mild steel foundation bolt assembly conforming to IS:2062 and grade 1 of IS:432 in concrete along with nuts, lock nuts (as per IS:1363, 1364 and IS:3138), washers, anchor plates, stiffner plates, protective tape, pipe sleeves, templates etc. including welding, cutting, grinding, threading, drilling etc. all complete. | MT | 34 | .0031729 |
| 703.0 | Same as above items 701 with BHEL supplied material (scrap) free of cost including Fabrication, loading, transportation, unloading and Erection etc. all complete from BHEL store to plant site. | -- | | |
| a | Mild steel embedments, inserts, pipe sleeves, angle pieces, rungs of various diameters, plates of dimensions as required etc. | MT | 90 | .0022354 |
| B | Mild steel foundation bolt assembly conforming to IS:2062 and grade 1 of IS:432 in concrete along with nuts, lock nuts (as per IS:1363, 1364 and IS:3138), washers, anchor plates, stiffner plates, protective tape, pipe sleeves, templates etc. | MT | 29 | .0006202 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 704.0 | Supplying, fabricating, erecting and installing following items in concrete/brickwall for all kind of works, including setting material in concrete, layout, scaffolding, cutting, forming, grinding, drilling, bolting, welding, jointing, testing etc. all complete. | -- | | |
| a | MS pipes of all diameters | kg | 17 | .0000013 |
| b | PVC pipes / conduits of all diameters | kg | 17 | .000007 |
| c | UPVC pipes / conduits of all diameters | kg | 5 | .0000022 |
| d | Expansion anchor fasteners (galvanised) of HILTI make(HUD-1 Universal Fastners) or equivalent of safe tensile capacity as specified below for brick work with expansion sleeve of A6 polyamide: | -- | | |
| i | 8mm Dia | Nos | 29 | .0000018 |
| ii | 10mm Dia | Nos | 29 | .0000022 |
| iii | 12mm Dia | Nos | 29 | .0000024 |
| iv | 14mm Dia | Nos | 29 | .0000031 |
| e | Expansion fasteners (mechanical galvanised) of HILTI make or equivalent of safe tensile capacity as specified below for concrete work with expansion sleeve of stainless steel: | -- | | |
| i | HST M8 | Nos | 5 | .0000007 |
| ii | HST M10 | Nos | 5 | .0000011 |
| iii | HST M12 | Nos | 5 | .0000017 |
| iv | HST M16 | Nos | 5 | .0000031 |
| v | HST M20 | Nos | 5 | .0000061 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| vi | HST M24 | Nos | 2 | .0000033 |
| f | Chemical Expansion fasteners (galvanised) of HILTI make or equivalent of safe tensile capacity as specified below for concrete work with anchoring rod, nuts, washers, chemicals all complete, etc: | -- | | |
| i | HAS-E5.8 M8 | Nos | 29 | .0000099 |
| ii | HAS-E5.8 M10 | Nos | 29 | .0000119 |
| iii | HAS-E5.8 M12 | Nos | 29 | .0000149 |
| iv | HAS-E5.8 M16 | Nos | 29 | .0000234 |
| v | HAS-E5.8 M20 | Nos | 29 | .0000386 |
| vi | HAS-E5.8 M24 | Nos | 26 | .000047 |
| 705.0 | Placing, locking and releasing of Vibration Isolation spring modules over the foundation at all elevations including providing all assistance under the supervision of the supplier, transportation from BHEL store, necessary staging, platforms, leveling, alignment etc. all complete. | Nos | 10 | .0000146 |
| 707.0 | Providing, laying and fixing rails(52kg/rm) and guide rails in concrete for transformer, rail track including cutting of rails, joining of rails, anchoring lugs etc all complete. | MT | 5 | .0003441 |
| 800.0 | GROUTING: Grouting including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, roughening surface, cleaning, ramming, curing etc. at all level, drawings and as directed by engineer - in - charge. (OPC Cement will be supplied by BHEL free of cost.) | -- | | |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 801.0 | Providing & grouting with cement slurry mix of approved ratio using pressure pump for water retaining concrete structures as per approved procedure including cost of nipples/ nozzles, cement, admixture, curing, pressure pumps, slurry agitator etc. all complete. Cost shall include fixing of nipples at maximum 500 mm centre to centre spacing, cutting of nipples after completing of grouting, making good of the nipple hole with appropriate non-shrink cement paste, water tightness test etc. all complete wherever specified in the drawing. | SQM | 200 | .0001176 |
| 805.0 | Providing & grouting of pocket holes, pipe sleeves and under base plates of structural steel work/ machinery/ pipe supporting structures including roughening of surface, cleaning, ramming, curing, etc. all complete with Combextra GP-2 or equivalent as per specification, drawing and direction of engineer-in-charge.(Cost of all material and cleaning of the pockets by compressed air shall be in the scope of the contractor). | CUM | 17 | .0015545 |
| 806.0 | Providing Chemical (epoxy) injection grouting with pressure pump for water retaining concrete structures conforming to IS:6494, including fixing nozzles, cost of approved chemical, admixture, curing etc. all complete . Payment shall be made as per the consumption of chemical grout. | Kg | 95 | .0002024 |
| 900.0 | DOORS & WINDOWS: Doors, windows, ventilators, louvers, roof ventilators, rolling shutters, partitions including all labour, material (unless otherwise specified in BOQ/contract specification), equipments, transportation, handling, preparation of working drawings etc. at all level as per specification, drawings and as directed by engineer - in - charge. | -- | | |
| 904.0 | Providing and fixing single or double steel door shutters with 45mm thk flush design shutter comprising of two outer sheets of 18 gauge steel sheets rigidly connected and reinforced inside with continuous vertical 20 gauge stiffeners, spot welded in position at not more than 150mm on centres including void filled with mineral wool (density as per specification), all fittings, Godrej or equivalent make mortice lock with handle on both sides, shop and final painting etc all complete. | SQM | 80 | .0004837 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 906.0 | Providing and fixing anodized extruded aluminium doors (single or double shutter) conforming to IS:1948, IS:1949 fabricated from extruded sections of HINDALCO/JINDAL or equivalent make having minimum 3mm wall thickness as per IS:1285, IS:733 and anodized and electro color coating of required shade as per IS 1868 (minimum anodized coating of grade AC15). fixed with rawl plugs, expansion fasteners,SS screws / fixing clips necessary filling of gaps at Junctions, at top, bottom & sides with required PVC / neoprene felt for bi-metallic protection etc. Glazing shall be clear float glass of 6mm thickness including snap fit type beading, concealed screws, fixtures, Godrej or equivalent make Mortice lock with handle on both sides, etc all complete. Aluminium section shall be smooth, free of stains, straight, mitred & jointed mechanically wherever required. (Glazing shall be paid separately) | KG | 200 | .0001096 |
| 908.0 | Providing and fixing steel windows/ventilator with steel sections as per IS:1038, IS:1361 & IS:7452 latest revision including all fittings, metal beadings, hold fasts, shop and final painting ,glazing etc. all complete. (Glazing shall be paid separately) | -- | | |
| a | Openable type | SQM | 1,770 | .0039536 |
| b | fixed type | SQM | 253 | .0003668 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 909.0 | Providing and fixing anodised aluminium work of Jindal, Hindalco or other equivalent approved make for door frames, windows, ventilators, partitions, railing etc with extruded standard tubular and other sections including all fittings & fixtures and accessories of approved make conforming to IS733 and IS1285, anodised and electro color dyed to required shade according to IS 1868 (minimum anodic coating of grade AC15), fixed with rawl plugs, expansion fasteners, SS screws or with fixing clips, including necessary filling of gaps at junctions, at top, bottom and sides with required PVC/neoprene felt for bi-metallic protection etc. including preparation of working drawings, aluminium cleat angle, aluminium snap-on-beading for glazing/panelling, stair case tread nosing, with all fittings and fixtures (like tower bolts, handles, door stopper with rubber shoes, 'L' drops, stays, floor springs, hydraulic door closures etc.), CP brass/stainless steel screws, providing and fixing hinges/pivots, and making provision for fixing of fitting wherever required including cost of PVC/neoprene gasket, all complete as per drawing, specification and instructions of engineer in charge (Glazing and panelling shall be paid separately). Weight of aluminium section only shall be measured. | Kg | 150 | .0000761 |
| 910.0 | Providing and fixing of aluminium composite panel(ACP) of following thickness with PVDF or polyester coating for interior partition of approved shade ,color etc all complete as per specification. | -- | | |
| c | 5mm | SQM | 1 | .0000042 |
| 911.0 | Providing and fixing of door closers as per specification ,of approved make & quality all complete of following type : | -- | | |
| a | Over head hydraulic door closures as per IS 3564 | Each | 1 | .0000016 |
| b | Floor mounted Hydraulic door closers as per IS 6315 | Each | 1 | .0000028 |
| 912.0 | Providing and fixing pressed steel frames fabricated from 16 gauge M.S sheet mortised, reinforced drilled and tapped for hinges and locks bolts strikes, hold fasts adjustable floor anchors, floor tiles/weather bars ,paintings etc all complete as per specifications. | Kg | 1,200 | .0001741 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 913.0 | Providing and fixing in position rolling shutter of hot rolled double dipped galvanised steel lath section of 18 SWG tested mild steel strips at 75mm rolling centres interlocked together through their entire length and jointed together at the end by end locks mounted on specially designed pipe shaft with brackets, side guides and arrangements for inside and outside locking with push and pull operation including wire springs, top cover, primer & shop coats of approved enamel paint etc, all complete as per IS 6248 and specification of approved make of following types: The bottom lath shall be coupled to a lock plate fabricated from 3mm thick galvanised steel plate and securely riveted with stiffening angles.(partly coiled and lath/full lath). | -- | | |
| a | Hand Operated | SQM | 5 | .0000129 |
| b | Mechanically Operated | SQM | 5 | .0000168 |
| c | Electrically operated | SQM | 108 | .0003907 |
| 914.0 | Providing and fixing PVC doors (25 thk double skin) of sintex or equivalent make including all fitting & fixtures as per specification, drawing and instructions of engineer in charge. | SQM | 5 | .0000153 |
| 915.0 | Providing, fixing and fitting of glazing of first grade class in steel/aluminium/wooden frames, where ever required, cleaning after fixing including hardware, gaskets, clips, beadings etc. all complete. | -- | | |
| d | 6 mm thick wired glass | SQM | 1,754 | .002831 |
| i | Two nos. 6 mm thick clear toughened float glass hermetically sealed and separated by 12 mm thick air gap for thermal insulation (only single elevation area to be measured) | SQM | 1 | .0000039 |
| j | Two nos. 6 mm thick tinted toughened float glass hermetically sealed and separated by 12 mm thick air gap for thermal insulation (only single elevation area to be measured) | SQM | 5 | .0000196 |
| k | One outer 6mm thick tinted heat-reflecting type float glass and one inner 6mm thick plain float glass hermetically sealed and separated by 12 mm thick gap for thermal insulation (only single elevation area to be measured). | SQM | 15 | .0000637 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|---------|---|---------------------|-------|--|
| 915a | Providing, fixing and fitting of glazing of first grade class in steel/aluminium/wooden frames, where ever required, cleaning after fixing including hardware, gaskets, clips, beadings etc. all complete. | -- | | |
| a | 6 mm thick float glass | SQM | 50 | .0001013 |
| 917.0 | Providing and fixing 12 mm thick BWP particle board, decorative veneer (prelaminated) on both sides, as panels in aluminium framed door shutter, fixed with necessary snap-on-beading etc. all complete (excluding aluminium works). | SQM | 5 | .0000086 |
| 918.0 | Providing and fixing steel louvered window with ISMC 100 frame all round including verticals with 18G pressed steel louvers, painting etc. all complete. | SQM | 55 | .0001674 |
| 919.0 | Providing and fixing 1 mm thk. MS sheet sliding shutters with frame and diagonal braces of 50X50X6 angle iron, 3 mm MS gusset plates at junction and corners, 25 mm dia pulley, 50X50X6 angle and T-iron guide at the top and bottom respectively including painting etc. all complete. | SQM | 160 | .0006999 |
| A921 | Extra over item 908 Providing and fixing 1.6mm thick wire as per IS 4948 and 12MM X30MM mesh for windows size including all fittings, fixtures etc all complete as per the directions of the Engineer in charge | SQM | 1,150 | .0002703 |
| 1000.0 | BRICKWORK: Brickwork masonry including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, scaffolding etc. at all levels as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 1001.0 | Providing brick work in cement mortar 1:6 (1 part cement 6 parts coarse sand) in walls, chambers etc. in thickness varying from 230mm to 460mm at all depths, places and positions below plinth including raking out joints, curing, scaffolding etc. complete excluding plastering and painting. | -- | | |
| a | Using fly ash lime bricks confirming to IS 12894 with crushing strength of 75 kg/cm ² (including cost of cement for brick making) | CUM | 20 | .0001436 |
| b | Using fly ash lime bricks confirming to IS 12894 with crushing strength of 50 kg/cm ² (including cost of cement for brick making) | CUM | 2 | .0000114 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 1002.0 | Providing brick work in cement mortar 1:6 (1 cement 6 coarse sand) in walls, chambers etc. in thickness 230mm at all heights, places and position above plinth including raking out joints, curing, scaffolding etc complete excluding plastering and painting. | -- | | |
| a | Using fly ash lime bricks confirming to IS 12894 with crushing strength of 75 kg/cm ² (including cost of cement for brick making) | CUM | 440 | .003718 |
| 1003.0 | Providing brick work in cement mortar 1:4 (1 cement 4 coarse sand) in partition walls, chambers etc. in thickness 115mm at all heights, places and position above or below plinth/graded level including providing two nos. 6 mm diameter MS bars at every third layer, raking out joints, curing, scaffolding etc complete excluding plastering and painting as per specification. | -- | | |
| a | Using fly ash lime bricks confirming to IS 12894 with crushing strength of 75 kg/cm ² (including cost of cement for brick making) | SQM | 50 | .0000514 |
| 1004.0 | Providing brick soling including spreading of earth, ramming, watering including 25mm thick cushion of sand complete but excluding excavation and disposal of surplus earth (excavation and disposal of surplus earth shall be measured under applicable item). Using brick on edge. | -- | | |
| d | Using burnt clay bricks of class designation 5.0 of nominal dimension | SQM | 11 | .0000073 |
| 1005.0 | Breaking of existing brick work at all levels including plastering, removing the rubbish up to a distance of 500 m including transportation, loading, unloading etc. all complete as directed by the engineer. | CUM | 11 | .0000185 |
| 1010.0 | Filling existing brick wall/ partition wall opening at all level including making good the broken edges/surface with cement mortar 1:6, painting, finishing to match with existing finishing, scaffolding/supporting at all level, removal of debris upto a lead of 1 km including loading, unloading, transportation etc. all complete. | SQM | 11 | .0000104 |
| 1011.0 | Providing and filling brick bats in soak pits all complete. | CUM | 10 | .0000119 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 1100.0 | DAMP PROOF COURSE: Damp proof course including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, shuttering, centering, curing etc at all level as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 1101.0 | Providing Damp Proof Course of following thickness with 1:1.5:3 concrete (10mm and down graded aggregate) with 2% of approved admixture of water proofing compound all complete. Two layers of hot bitumen coating 85/25 grade as per IS:702 @ 1.7Kg./sqm shall be applied one before & one after the DPC. | -- | | |
| b | 50mm thick | SQM | 20 | .0000061 |
| 1102.0 | Providing Damp Proof Course 50mm thick 1:1.5:3 concrete (6 mm and down graded stone chips) with 1% of approved admixture of water proofing compound all complete. Then hot bitumen (residual petroleum bitumen of penetration 80/100 of approved quality) shall be applied over the prepared surface in two coats at the rate of 1.7kg per sq. meter per coat and dry sand spread over it | -- | | |
| a | 40mm thick | SQM | 10 | .0000025 |
| b | 50mm thick | SQM | 110 | .0000317 |
| 1200.0 | PLASTERING: Cement mortar plaster including making grooves wherever required including all labour, material (unless otherwise specified in BOQ/contract specification), scaffolding, curing etc at all level as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| A1201 | Providing 20mm thick plaster in two layers outside the building/boundary wall with an under layer 12 mm thick in CM 1:5 and top 8 mm thick layer in CM 1:3 (Sand faced) with approved water proofing compound on walls, finished to a smooth finish with a paste of neat cement @ 1kg/sqm and rubbed smooth with trowel over plastered surface (Aldeck smooth finish) including providing 3mmx3mm size grooves at junctions of two dissimilar materials etc all complete. | SQM | 5,038 | .0015449 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 1202.0 | Providing 12mm thick plaster inside the building/boundary wall in cement mortar 1:6 on walls finished to a smooth finish as per specification all complete. | SQM | 303 | .0000612 |
| A1202 | Providing 12mm thick plaster inside the building/boundary wall in cement mortar 1:4 on even side of walls finished to a smooth finish with approved water proofing compound on walls, finished to a smooth finish with a paste of neat cement @ 1kg/sqm and rubbed smooth with trowel over plastered surface (Aldeck smooth finish) as per specification all complete. | SQM | 4,905 | .0009904 |
| A1204 | Providing 6mm thick plaster on ceiling in cement mortar 1:3 finished to a smooth all complete. | SQM | 400 | .0000787 |
| 1207.0 | Forming groove of uniform size from 12X12 mm upto 25X15 mm in plastered surface as per approved pattern, using wooden battens nailed to the under layer, including removal of wooden battons, repair of the edges of plaster panel and finishing the groove etc. complete as per specification, drawing and the instructions of engineer in charge. | RM | 24 | .0000008 |
| 1300.0 | FINISHES TO CONCRETE / PLASTERED SURFACES: Finishes, painting to concrete, plastered surfaces including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, surface preparation, scaffolding etc. at all level as per specification, drawings and as directed by engineer - in - charge. | -- | | |
| 1301.0 | Two or more coats of white wash/ colour wash as per IS 627 of approved brand and manufacture to give an even shade including a priming coat as per specifications. | SQM | 24 | .0000009 |
| 1304.0 | Two or more coats of acrylic distemper of approved brand and manufacture to give an even shade including a priming coat with distemper primer complete. | SQM | 2,525 | .000202 |
| 1305.0 | Providing and applying two or more coats of acrylic emulsion paint as per IS 5411 of approved brand, shade and manufacture to give smooth, hard, durable & glossy finish over a coat of primer over prepared plaster surface as per manufacturers guideline. | SQM | 2,380 | .0002718 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 1306.0 | Providing and applying 2 or more coats of acid/alkali resistant paint of approved brand and colour to floors, walls and ceiling including preparation of surface to receive paint, providing and applying bitumen primer confirming to IS 158 complete all as per manufacturer's recommendations and as approved by engineer, at all heights above or below grade level, complete as per specifications. | SQM | 84 | .0000293 |
| 1308.0 | Providing and applying 2 or more coats of Chlorinated Rubber paint of approved brand and colour to floors, walls and ceiling including preparation of surface to receive paint, providing and applying chlorinated rubber zinc phosphate primer confirming to IS 158 complete all as per manufacturer's recommendations and as approved by engineer, at all heights above or below grade level, inclusive of intermediate coat of Titanium dioxide / micaceous iron oxide complete as per specifications. | SQM | 7 | .0000013 |
| 1310.0 | Two or more coats of black anti-corrosive bitumastic painting of approved brand and manufacture to give an even shade complete. | SQM | 5 | .0000003 |
| 1312.0 | Providing and applying 3 coats of water proof cement paint of approved make and color on exterior surface at all heights including material, labour, scaffolding, curing etc including primer coat complete as per specification. | SQM | 4,935 | .0004135 |
| 1316.0 | Providing and applying 2 mm thick plaster of paris punning on walls including preparation of surface, staging, etc. to achieve a smooth even surface all complete as per specification and as directed by Engineer. | SQM | 100 | .0000089 |
| 1317.0 | Providing and applying 2 mm thick white cement punning on walls including preparation of surface, staging, etc to achieve a smooth even surface all complete as per specification and as directed by engineer. | SQM | 10 | .0000008 |
| 1320.0 | Providing and applying acid alkali and oil resistant high build, solvent free, self smoothing, seamless epoxy based amine cured floor finish 150 microns over primer on C.C. flooring | SQM | 10 | .0000035 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 1400.0 | FLOORING AND SKIRTING: Flooring and skirting at all level including base layer, labour, material (unless otherwise specified in BOQ/contract specification), equipments, transportation, handling, curing, polishing etc. at all level as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| A1401 | Providing and laying 50 mm thick heavy duty cement concrete in flooring with non-metallic hardener pigmented topping 12mm thick in flooring. Under layer of 38mm thick cement concrete mix 1:2:4 (1 cement: 2 sand : 4 stone aggregates 12.5mm well graded) and top layer of 12mm thick non-metallic concrete of mix 1:2 (1 cement hardner mix with approved quality non-metallic hardening compound :2 stone aggregate 6mm nominal size) by volume including cement slurry, rounding off edges, aluminium strips etc. all complete for following (Quoted item rate shall be inclusive of providing glass joint strips) | SQM | 16,303 | .00825 |
| 1403.0 | Providing and laying precast polished heavy duty cement concrete tiles (Carborundum topping pigment content is 3.5 kg per 50 Kg of Cement) of size 300X300X25 thick of approved shade as per IS 1237, including minimum 20mm cement mortar bedding of 1:3 (1 cement : 3 sand) jointed with neat cement slurry@4.4 kg/sqm,labour,materials, etc. all complete with pigment to match the shade of the tiles including rubbing, curing, grinding and polishing complete with laying as per IS 1443 etc.(inclusive of cost of cement for tiles manufacturing) all complete for following: | -- | | |
| a | Laid in floors | SQM | 1 | .0000012 |
| b | Laid in skirting | SQM | 1 | .0000015 |
| A1403 | Providing and laying precast polished heavy duty cement concrete tiles (Carborundum) of size 300X300X22 mm thick of approved shade using colouring pigments and hard chips like carborundum, quartz etc.as per IS 1237 and laid as per IS 1443 over concrete under bed 1:3 (1 cement : 3 sand) jointed with neat cement slurry etc. all complete including rubbing, curing, grindig and polishing complete with laying to result in over all thickness of 50 mm all complete for following: | -- | | |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| a | Laid in floors | SQM | 1 | .0000012 |
| b | Laid in skirting | SQM | 1 | .0000015 |
| A1405 | Providing and laying 50 mm thick floor finish with 250X250X20mm thick Terrazo Tiles including cement mortar bedding of 1:3 (1 cement : 3 sand) with neat cement slurry etc. all complete. | SQM | 2 | .0000019 |
| B1405 | Providing and laying 25 mm thick cast-in-situ Terrazo in flooring/skirting as per IS: 2114 using white cement or cement with colouring pigment including cement mortar bedding of 1:3 (1 cement : 3 sand) with neat cement slurry etc. all complete. | SQM | 2 | .0000019 |
| 1406.0 | Providing and laying polished Kota stone 18mm to 20mm thk in flooring. Under bed shall average 30mm thk of 1 cement : 2 sand : 4 stone aggregates by volume and brought to proper level. The kota stone slabs/tiles laid over under bed, pressed and tapped down with wooden mallet to the proper level, lifted and pressed again with thick cement slurry @4.4kg/sqm spread over the surface with fine joint finished including pigments, curing, grinding, granite polishing etc. all complete. | SQM | 2 | .0000028 |
| 1407.0 | Providing and laying polished Kota stone 14mm to 16mm thk in flooring. Under bed shall average 35mm thk of 1 cement : 2 sand : 4 stone aggregates by volume and brought to proper level. The kota stone slabs/tiles laid over under bed, pressed and tapped down with wooden mallet to the proper level, lifted and pressed again with thick cement slurry @4.4kg/sqm spread over the surface with fine joint finished including pigments, curing, grinding, granite polishing etc. all complete. | SQM | 1 | .0000013 |
| 1408.0 | Providing polished Kota stone 18mm to 20mm thk in skirting projecting 6mm from adjacent plaster minimum 12 mm thick cement mortar bedding of 1:3 (1 cement : 3 sand) with thick cement slurry @4.4kg/sqm spread over the surface with fine joint finished including cutting brickwall upto the required depth, edging, finishing etc. all complete. | SQM | 1 | .0000015 |

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at
2x660MW Udangudi STPP**

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 1410.0 | Marble stone Flooring laid in 50mm overall thickness with 18-20mm thick marble slabs (grade -1) with minimum 30mm thick underbed of 1 cement : 2 sand : 4 stone aggregate by volume and brought to proper level. The marble slabs/tiles laid over underbed with mortar 1:3, pressed and tapped down with wooden mallet to the proper level, lifted and pressed again with thick cement slurry @4.4kg/sqm spread over the surface with fine joint finished including pigments, curing, grinding, granite polishing etc. all complete. | SQM | 45 | .0000875 |
| A1416 | Providing and laying glazed vitrified ceramic tiles of size 600x600mm from reputed / approved manufacturer including underbed of cement mortar 1:3 with neat cement slurry etc. all complete for following. | -- | | |
| b | 10mm thick tiles In flooring | SQM | 150 | .0002086 |
| c | 7mm thick tiles In skirting and dado upto specific height | SQM | 5 | .0000062 |
| d | 10mm thick tiles In skirting and dado upto specific height | SQM | 10 | .0000144 |
| 1420.0 | Providing and laying Heavy Duty dust pressed Ceramic Tiles of 7mm thick of reputed manufacturer of approved finish shade and colour including 20mm underbed of cement mortar 1:3 with neat cement slurry @3.3kg/sqm etc. all complete. | -- | | |
| a | 300X300 mm | SQM | 50 | .0000387 |
| b | 600X600 mm | SQM | 10 | .0000077 |
| A1422 | Providing & fixing Acid / Alkali resistant (Chemical resistant) tiles confirming to IS:4457 in flooring/Dado and shall be laid over bitumastic lining of min 12mm thick (to be laid in layers of 6mm each). The tiles shall be applied with 6mm thick Potassium Silicate bedding mortar as per IS:4441, 4443 & 4832 and including preparation of surface, application of bitumen primer, curing etc. all complete for following thicknesses. The tiles should be abrasion resistant & durable. | -- | | |
| a | 25mm thick | SQM | 20 | .0000602 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 1424.0 | Providing & fixing chemical resistant (AR)(Acid / Alkali) bricks (75mm thick) conforming to IS:4860 in the floor of neutralization pit. Surface on which lining to be applied shall be prepared in accordance with IS:2395. Bitumen primer as per IS:158 followed by 18mm thick bituminastic followed by 6mm thick potassium silicate mortar bedding shall be provided before laying AR bricks. The joints between AR bricks shall be filled with resin type of mortar conforming to IS:4832, part II, seal coat of readymade epoxy paint shall be provided on joints to cover up any porosity that may be left in mortar. End sealing shall be done with bituminastic AR bricks shall be laid with 6mm wide & 50mm deep pointing (epoxy / furnace / CNSL) & acid curing shall be done all complete as per specification. | SQM | 20 | .0000577 |
| 1426.0 | Providing and laying marble skirting /dado (Aranga white or approved shade/color /design) equivalent of minimum 20mm thickness projecting 6mm from adjacent plaster all complete including underbed 20mm cement mortar 1:3, with thick cement slurry 3.3kg/sqm spread over the surface scaffolding etc. all complete. | SQM | 2 | .000004 |
| 1427.0 | Providing and fixing glazed ceramic tiles of approved color and design of size 200x300mm / 300x300mm in dado of approved size, projecting 6mm uniformly from adjacent plaster or wall finish. The mix for 20mm thick underbed plaster shall consist of 1part cement and 3 parts sand by weight. fairly moist but firm, tiles shall be pressed over under bed by applying cement slurry @ 3.3kg/sqm including pigments, curing etc all complete for following thicknesses: | -- | | |
| 1428.0 | Providing and laying 3mm thick antistatic PVC flooring / skirting of approved shade, as per IS:3462 and laying as per IS:5318 all complete. | SQM | 11 | .0000034 |
| 1429.0 | Providing and fixing removable type flooring system consisting of fire resistant particle board of size 600X600X35 mm with 0.05 mm thick aluminium foil lining at bottom and with 2 mm thick anti static PVC topping including proprietary floor supporting system complete as per specification. | SQM | 10 | .0000348 |
| 1430.0 | Providing and fixing dividing strips in joints of cast in situ floorings at various elevations, finishing, all labour, material etc. complete as per drawing, specification and instructions of engineer in charge. | -- | | |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| a | Glass strips 40 mm wide and minimum 6 mm thick. | RM | 600 | .000028 |
| 1500.0 | ROOFING / SIDE CLADDING: Roofing / side cladding work including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, scaffolding, laps, hooks, washers, corner pieces etc. at all level as per specification, drawings and as directed by engineer - in - charge. | -- | | |
| 1501.0 | Designing, providing, erection and fixing permanently color coated galvanised MS troughed metal sheet decking plate of approved colour and conforming to class3 of IS 14246 over roof purlins for cast-in-situ roof slab as per relevant IS code and specification. Bare metal thickness of deck plate shall be minimum 0.7mm with minimum trough depth of 44 mm having minimum yield strength of 250 MPa and shall serve as permanent shuttering to the roof slab 100mm thick measured over crest of metal decking & shall have adequate strength to support weight of green concrete and imposed loads of min 150 kg/sqm during construction between purlins as per manufacturer's recommendations/ calculations/ test certificates for approval including fixing of plates to purlins, side lapping, end lapping etc. all complete for below mentioned spans. The sheet shall be permanently coated with silicon modified polyester paint of minimum 20 micron DFT on exposed surface (facing operating floor) and minimum 7 micron on other face over epoxy primer applied over hot dipped galvanising @ 275 gm/sqm including fixing of sheet to purlin with self drilling white zinc plated heat treated carbon steel screws of minimum 5.6 mm dia @ 260mm c/c in the trough and stich screws between two adjacent sheets and sealing with epoxy sealant. Measurement of profile sheeting shall be of the plan area of roof covered by MS trough metal decking. | -- | | |
| a | Span Upto 1800mm | SQM | 10,793 | .0149005 |
| -- | -- | -- | | |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 1504.0 | Designing, providing and fixing External sheet of Permanent colour coated metal cladding with troughed M.S. sheets of 0.6mm bare metal thickness having minimum yield strength 250 MPa and zinc-aluminium alloy coating not less than 150 gm/sqm total on both sides including fixing to supports / rails by concealed fixing system, corrosion resistant self tapping / self drilling type fasteners with suitable cap, flashing etc. all complete. The exposed face of the sheet shall be permanently colour coated with Polyfluro Vinyl Coating (PVF2) of minimum dry film thickness (DFT) 20 microns over suitable primer. Inner face of the sheet shall be provided with suitable pre-coating of minimum DFT 7 microns over suitable primer. The permanent colour coated sheet shall meet the general requirements of IS : 14246 and shall conform to class 3 for the durability. | SQM | 29,004 | .0291348 |
| A1504 | Designing, providing and fixing External Roof sheet of Permanent colour coated metal cladding with troughed M.S. sheets of 0.8mm bare metal thickness having minimum yield strength 250 MPa and zinc-aluminium alloy coating not less than 275 gm/sqm total on both sides including fixing to supports / rails by concealed fixing system, corrosion resistant self tapping / self drilling type fasteners with suitable cap, flashing etc. all complete. The exposed face of the sheet shall be permanently colour coated with Polyfluro Vinyl Coating (PVF2) of minimum dry film thickness (DFT) 20 microns over suitable primer. Inner face of the sheet shall be provided with suitable pre-coating of minimum DFT 7 microns over suitable primer. The permanent colour coated sheet shall meet the general requirements of IS : 14246 and shall conform to class 3 for the durability. | SQM | 14,017 | .0187736 |
| 1511.0 | Providing and fixing insulation of resin bonded mineral wool of 50 mm nominal thickness conforming to IS 8183 having a density of 32 kg/cum glass wool or 48 kg/cum for rock wool, for cladding/under deck insulation including application of glue and tying with lacing wire, for glass/rock wool as per manufacturer's recommendations. | -- | | |
| a) | For insulation in Sandwitch Cladding | SQM | 200 | .0001201 |
| b) | For underdeck insulation below RCC slabs | SQM | 20 | .0000138 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 1519.0 | Supply, Transportation & erection of 2mm thick Perspex sheet including Fasteners, scaffolding, staging, tools & tackles, gas cutting, welding, consumables etc all complete. | SQM | 1,640 | .0008278 |
| 1600.0 | FALSE CEILING: False ceiling including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, suspension system etc at all level as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 1603.0 | Providing and fixing permanently colour coated aluminium false ceiling of approved colour and Luxalon 84 C or approved equivalent with corrosion resistant aluminium alloy panels of minimum thickness 0.5mm including 50mm thick mineral wool insulation(density 48 kg/cum) conforming to IS:8183 bound in polythene bags on top of panels. Additional hangers and height adjustment clips shall be provided for return air grills, light fixtures, A.C. ducts etc all complete. Suitable M.S. channel grid with minimum MC 75 shall also be provided above the false ceiling level for movement of personnel to facilitate maintenance of lighting fixtures, AC ducts etc. (Materials for structural platform grid made up of MS Channels/ Beams / Angles shall be supplied by BHEL and shall be paid under ST No 2301) | SQM | 10 | .0000216 |
| 1604.0 | Providing, fixing and laying permanently colour coated aluminium false ceiling of approved colour with stove enamel finish of approved make in LINEAR and SQUARE type with corrosion resistance aluminium alloys panels of minimum thickness 0.5mm including 50mm thick mineral wool insulation (as per IS:8183) bound in polythene bags on top of panels. Additional hangers and height adjustment clips shall be provided for return air grills, light fixtures etc. Suitable M.S. channel (minimum MC 75) grid 1200 mm C/C maximum shall also be provided above the false ceiling level for movement of personnel to facilitate maintenance of lighting fixtures, AC ducts etc. The work to be complete as per specifications, drawings and direction of engineer. (Structural steel works for platform for movement is separately payable under relevant items of BOQ) | SQM | 100 | .0002031 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 1605.0 | Providing, fixing and laying anodised natural colour matt finished aluminium false ceiling of Jindal/Hindalco make with corrosion resistance aluminium alloys panels of minimum thickness 0.5mm including 50mm thick mineral wool (density 48kg/cum insulation (as per IS:8183) bound in polythene bags on top of panels. Additional hangers and height adjustment clips shall be provided for return air grills, light fixtures etc. Suitable M.S. channel (minimum MC 75) grid 1200 mm C/C maximum shall also be provided above the false ceiling level for movement of personnel to facilitate maintenance of lighting fixtures, AC ducts etc. The work to be complete as per specifications, drawings and direction of engineer. (Structural steel works for platform for movement is separately payable under relevant items of BOQ) | SQM | 20 | .000038 |
| 1607.0 | Providing and Fixing 12mm thick Gypsum board plain/ mineral fibre based acoustic ceiling board in plan or elevation with aluminium grid, metal suspension system, anchor fastener adjustable hangers etc. including two or more coats of acrylic emulsion paint of approved colour to give an even shade with smooth finish all complete as per architectural design and detail. Metal suspension system as per ASTM C-635 shall be hot dipped M.S.galvanized (grade 180 as per is :277) and nominal size of T-section shall be 24 x 38 mm or 24 x 25 mm cross runners. 24mm wide exposed flange surface shall be permanently color coated. Suspension system shall be as per manufacturer's specification. Movement platform of structural steel shall be provided if required for the movement of personnel to facilitate maintenance of lighting fixtures, AC ducts etc. (Structural steel works for platform for movement is separately payable under relevant items of BOQ). Work shall include 25mm thick resin bonded mineral wool insulation (as per IS:8183) bound in polythene bags on top of ceiling. The work to be complete as per specifications, drawings and direction of engineer. Payment terms - a) On receipt of Gypsum board false ceiling at site - 50%; b) On completion of erection & fixing - 50%. | SQM | 10 | .0000146 |
| 1700.0 | RAIN WATER DOWN TAKE PIPES: Rain water down take pipes at all level including all labour, material (unless otherwise specified in BOQ/contract specification), transportation, 2 coats of approved paint over one primary coat, fixtures, accessories etc as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 1709.0 | Providing and fixing HDPE down take pipes conforming to IS:4984 as per specification of following diameters. | -- | | |
| a | 110 mm Dia | RM | 110 | .0000541 |
| b | 160 mm Dia | RM | 2,520 | .0018826 |
| 1711.0 | Supplying and fixing galvanized gutter of required size as per specification and direction of engineer in charge. | MT | 1 | .0000998 |
| 1800.0 | MISCELLANEOUS: Miscellaneous works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. at all level unless otherwise specified as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 1801.0 | Providing and Filling in trenches, plinths, area paving and other underground structures with graded stone aggregate of size range 63 mm to 45 mm in layers not exceeding 230 mm in thickness including breaking of stone boulders to required sizes, filling the interstices with selected sand and compacting to 85 % of original volume of stone stack for all lifts etc. all complete. Payment shall be made for the measurement of the volume of the compacted fill. | CUM | 1,377 | .0021287 |
| 1802.0 | Supply and laying approved quality Stone aggregate 40mm size in transformer yards. | CUM | 10 | .0000251 |
| 1804.0 | Providing and fixing weep holes in Retaining wall, drains, etc consisting of 100 mm dia HDPE pipe sleeves with single side covering for the pipe mouth with galvanised welded wire fabric of 20 mm sq. opening all complete. | EACH | 400 | .0000782 |
| 1805.0 | Providing and mixing approved Bipolar Concrete penetrating Corrosion inhibiting admixture phenolic base (krishna conchem or equivalent) in concrete as per detail specification of manufacturer etc. all complete. Payment shall be made per cum of concrete. | CUM | 20,000 | .0179576 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 1806.0 | Providing and mixing approved sodium nitrate based Concrete penetrating Corrosion inhibiting admixture of 'Hindcon' or equivalent in concrete as per detail specification of manufacturer etc. all complete. (For Payment, CUM quantity of concrete shall be measured) | cum | 120 | .0000216 |
| 1807.0 | Anti termite chemical treatment of soil with Chlorpyriphos/Lindane E.C. 20% with 1% concentration conforming to IS:8944 and as per IS 6313 all complete. (Plinth area of building at ground floor only shall be measured for payment). | SQM | 25 | .0000039 |
| 1808.0 | Laying of earthing mats/rods including risers, transportation from yard stores, loading, unloading, cutting to length, welding, protective painting of joints etc. all complete. (Excavation & Back filling shall be paid separately under respective item of earth work. Earthing mats/rods shall be supplied by BHEL free of cost) | MT | 1 | .0000116 |
| 1813.0 | Providing Earthing pit as per drawing with charcoal & salt, GI pipes, GI earth electrodes, GI wire, GI strips, brick chamber with covers including associated earthwork etc. all complete. | EACH | 1 | .0000261 |
| 1823.0 | Providing and laying cinder filling in the toilets, roads, etc complete as directed by engineer in charge. | CUM | 1 | .0000023 |
| 1824.0 | Disposal of scrap steel, scrap wood, broken packing crates, cable scrap, debris and other civil waste, electrical waste materials etc. from project site to a designated place within 5 KM range, with all manpower T & P etc. including loading and unloading as and when directed by BHEL. | -- | | |
| a) | Steel scrap / metal scrap | MT | 3 | .0000021 |
| b) | Debris & Other waste materials. | CUM | 3 | .0000004 |
| 1825.0 | Providing & Laying 20micron thick polythene sheet below the concrete base including materials, labour etc. complete as per drawing / direction of engineer. | SQM | 3 | .0000002 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 1832.0 | Providing and fixing sliding layer of bitumen paper or craft paper over the screed layer for water retaining structures to destroy the bond between the screed and the base slab concrete of the water retaining structure etc all complete. | SQM | 2 | .000000038 |
| 1833.0 | Supplying, stacking and laying 150 mm thick sand filter of approved quality behind retaining wall including screening, washing (wherever required), watering, compaction, dressing, necessary trimming if any including all leads and lifts etc all complete as per specification and as directed by the engineer-in-charge. | CUM | 2 | .0000065 |
| 1834.0 | Supplying, stacking and laying 150 mm thick gravel filter of approved quality behind retaining wall including screening, washing (wherever required), watering, compaction, dressing, necessary trimming if any including all leads and lifts etc all complete as per specification and as directed by the engineer-in-charge. | CUM | 2 | .0000038 |
| 2000.0 | FENCING AND GATES: Fencing and gates including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc at all level as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 2003.0 | Supplying and erecting in position 2.4 m high PVC coated galvanised chain linked fencing of minimum 8 gauge (including PVC coating) of mesh size 75mm x 75mm. The diameter of the hot dip galvanised steel wire for chain link fencing excluding PVC coating shall not be less than 12 gauge. Concertina of height of 600 mm at top of chain link fencing shall be provided with all accessories. Concertinal shall be from tensile serrated galvanised wire (HTSW) made with wire diameter of 2.5 mm which will be stretched to 6m and attached on two strands of galvanised HTSSW (high tensile spring steel wire) of 2.5mm dia by means of clips at 1m interval. These two HTSSW strands will be attached to the fence posts/ angles with 12 mm security fasteners. Cost to include for GI hook bolts, rings & washers, hot dip galvanised tension wires, 25X6 mm GI flat stretcher bar at end posts etc. all complete. (Structural post shall be paid separately under ST No. 2007) | RM | 10 | .0000203 |

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at
2x660MW Udangudi STPP**

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 2005.0 | Supplying and fixing 600mm high G.I. barbed wire fencing on top of boundary wall consisting of min. 6 nos. strands of barbed wire hot dip galvanised wire of 12G comprising of 2 ply with barbs of 16G spaced at 100mm including GI clips, anchors, accessories etc. all complete. (Structural post shall be paid separately under ST No. 2007/ 2008 as the case may be) Measurement shall be for per running meter of fencing. | RM | 10 | .0000007 |
| 2006.0 | Supplying and fixing 600mm high concertina on top of boundary wall including GI tension wires, clips, anchors, accessories etc. all complete. Concertinal shall be from tensile serrated galvanised wire (HTSW) made with wire diameter of 2.5 mm which will be stretched to 6m and attached on two strands of galvanised HTSSW (high tensile spring steel wire) of 2.5mm dia by means of clips at 1m interval. These two HTSSW strands will be attached to the fence posts/ angles with 12 mm security fasteners. (Structural post shall be separately under ST No. 2007) | RM | 50 | .0000145 |
| 2007.0 | Supply and fixing of hot dip galvanised mild steel posts for fencing. Rate of zinc coating shall not be less than 710 g/m ² on steel posts. | MT | 1 | .0000844 |
| 2009.0 | Supply, fabrication and installing in position and testing galvanised MS Gates out of channels, joists, angles, flats, plates, pipes, welded steel wire mesh & sheets including stiffeners, bracings, fabricated hinges, MS Aldrops with locking arrangement, tempered steel pivot, guide track of MS Tee, bronze aluminium ball bearing arrangements, castor wheels, paintings etc. all complete. | MT | 1 | .0000938 |
| 2100.0 | WATER SUPPLY: Water supply work including men, material (unless otherwise specified in BOQ/contract specification), equipment etc. at all level as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 2101.0 | Providing and fixing in position tested heavy duty type chromium plated (CP) brass long neck bib cocks including sockets, union, nuts etc all complete - 15mm nominal bore. | NOS | 2 | .0000017 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 2102.0 | Providing and fixing in position heavy duty brass stop cock of approved quality including all specials etc all complete - 15mm nominal bore. | NOS | 2 | .0000006 |
| 2103.0 | Providing and fixing in position heavy duty brass full way valve with wheel of approved quality including all specials etc all complete for following sizes: | -- | | |
| a | 25mm nominal bore. | NOS | 2 | .0000009 |
| b | 50mm nominal bore. | NOS | 2 | .0000017 |
| 2104.0 | Providing and fixing GI pipes class B medium class conforming to IS:1239 pipes shall be concealed and painted with anticorrsive paint, complete for internal works with GI sockets, unions, elbows, tees, nipples etc and clamps including cutting and making good the walls etc all complete for following sizes: | -- | | |
| a | 15 mm nominal bore. | RM | 5 | .000002 |
| b | 20 mm nominal bore. | RM | 10 | .0000046 |
| c | 25 mm nominal bore. | RM | 10 | .0000055 |
| d | 50 mm nominal bore. | RM | 10 | .0000086 |
| 2105.0 | Providing and fixing GI pipes class B complete for external work with GI sockets, unions, elbows, tees, nipples etc including trenching & refilling, anti-corrosive paint etc all complete for following sizes: | -- | | |
| a | 15 mm nominal bore. | RM | 5 | .0000016 |
| b | 20 mm nominal bore. | RM | 5 | .0000018 |
| c | 25 mm nominal bore. | RM | 5 | .0000022 |
| d | 50 mm nominal bore. | RM | 5 | .0000038 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 2106.0 | Providing and fixing 610mmx453mmx6mm thk mirror from reputed mirror manufacturer. Mirror shall be mounted with glass adjustable revolving CP brackets with CP screws etc all complete. | NOS | 1 | .0000009 |
| 2107.0 | Providing and fixing 610mmx127mmx6mm thk clear glass with C.P Guard rails and mounted on C.P. brackets etc all complete. | NOS | 1 | .0000007 |
| 2108.0 | Providing and fixing 25 mm diameter stainless steel towel rails (600mm X 25mm) with C.P. mounting brackets all complete. | NOS | 1 | .0000007 |
| 2109.0 | Providing and fixing 20mm dia chromium plated M.S. pipes wall mounted towel rod with C.P. Brackets etc all complete. | NOS | 1 | .0000006 |
| 2110.0 | Providing and fixing C.P. Soap holder mounted with C.P. screws etc all complete. | NOS | 1 | .0000005 |
| 2111.0 | Providing and fixing stainless steel / C.P. liquid soap dispenser. Dispenser shall be round and easily revolving with removable threaded nozzle and mounted on C.P. brackets etc all complete. | NOS | 1 | .0000007 |
| 2112.0 | Providing and fixing glazed vitreous wall mounted paper holder with suitable cover cum cutter fitted with CP screws etc. sll complete. | NOS | 1 | .0000004 |
| 2113.0 | Providing and fixing chromium plated brass shower rose 100mm dia with 15 or 20 mm inlet dia all complete. | NOS | 1 | .0000001 |
| A2114 | Providing & fixing in position polyethylene (P.V.C.) water tank conforming as per IS12701 of Syntex or approved equivalent including making all necessary inlet & outlet pipes, fixture, ball cocks, valves etc all complete for following capacities. GI pipes shall be paid separately under ST No. 2105. | -- | | |
| a | 500 litres capacity | NOS | 1 | .0000035 |
| b | 1000 litres capacity | NOS | 2 | .0000139 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| c | 2000 litres capacity | NOS | 2 | .0000278 |
| 2200.0 | SANITARY: Sanitary work including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. at all level as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 2201.0 | Supply and fixing glazed vitreous china Wash Basin of approved make conforming to IS:2556 part 4 of oval shape with R.S. or C.I. brackets painted white, 15mm chromium plated brass hot & cold faucets with nylon washers, chromium plated brass chain with rubber plug, 32mm chromium plated brass bottle trap and waste of standard pattern, 32mm dia chromium plated brass trap unions, plastic connection pipe with chromium plated nuts, fittings, cutting and making good the walls where required etc all complete. | -- | | |
| a | White | EACH | 2 | .0000075 |
| b | Colored | EACH | 2 | .000008 |
| 2202.0 | Providing and fixing approved vitreous china laboratory sink of size 600x400x200mm conforming to IS:2556 (part-5) with R.S. or C.I. brackets, chromium plated brass chain with rubber plug 40mm, 40mm CP brass waste and 40mm CP brass trap with necessary union complete including painting the fittings, cutting and making good the wall where required etc. all complete. | EACH | 2 | .0000057 |
| 2203.0 | Providing and fixing stainless steel kitchen sink of size 610x510x200mm conforming to IS: 13983 including all fittings etc. all complete. | EACH | 2 | .0000103 |
| 2204.0 | Providing and fixing colour glazed vitreous china European type water closet conforming to IS:2556 with siphon, open front solid plastic seat and plastic cover, low level 12.5 litre PVC flushing cistern (same colour as WC) with valveless fittings, necessary C.P connections etc all complete. | -- | | |
| a | Floor mounted | EACH | 2 | .0000104 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| b | Wall mounted | EACH | 2 | .0000202 |
| 2205.0 | Providing and fixing colour glazed vitreous indian type Orissa pattern (580x440mm) water closet conforming to IS:2556 part 3 with all fittings including foot rests, low level 12.5 litre PVC flushing cistern with valveless fittings, necessary C.P connections etc all complete. | EACH | 1 | .0000053 |
| 2206.0 | Providing and fixing white flat back glazed vitreous china urinals of size 440x265x355 mm with photo voltaic control flushing system as per IS:2556 (part 6, section 1) with flush pipes, lead pipes, gratings, traps and necessary C.P. fittings etc. all complete. | EACH | 1 | .0000064 |
| 2207.0 | Supply, laying and jointing UPVC pipes of class 3 as per IS:4985 including bends, branches and all other necessary fittings, M.S holder bats/clamps, cutting and making good the walls and floors, jointing, testing etc all complete for following. | -- | | |
| a | 75mm dia pipes | RM | 2 | .0000006 |
| b | 110mm dia pipes | RM | 2 | .0000007 |
| c | 160mm dia pipes | RM | 2 | .000001 |
| d | 200mm dia pipes | RM | 2 | .0000012 |
| 2208.0 | Providing, laying light duty non pressure NP3 class RCC pipes with collars jointed with stiff mixture of cement mortar 1:2 including testing of joints etc all complete for following. | -- | | |
| a | 200mm dia | RM | 17 | .0000099 |
| b | 300mm dia | RM | 66 | .0000493 |
| c | 450mm dia | RM | 91 | .0001996 |
| d | 600mm dia | RM | 116 | .0003275 |

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at
2x660MW Udangudi STPP**

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| e | 900mm dia | RM | 116 | .0005125 |
| 2211.0 | Providing and fixing C.I Manhole heavy duty cover of size 600mmx450mm including frame from reputed manufacture etc. all complete. | EACH | 2 | .0000061 |
| 2212.0 | Providing and fixing circular heavy duty C.I. manhole cover of 600 mm dia with frame etc. all complete. | EACH | 2 | .0000053 |
| 2213.0 | Providing and fixing square mouth S.W Gully trap grade 'A' complete with CI grating, brick masonry chamber(Clay Brickwork in 1:6 mortar, 12mm plaster in 1:6 mortar & 1:2:4 Cement Concrete) and water tight CI cover with 300x300mm (inside). The weight of cover to be not less than 4.53 Kg and frame to be not less than 2.72 Kg etc all complete for following sizes: | -- | | |
| a | 100x100mm P or S Type. | EACH | 2 | .0000029 |
| b | 150x100mm P or S Type. | EACH | 2 | .000003 |
| c | 150x150mm P or S Type. | EACH | 2 | .0000032 |
| 2214.0 | Providing and fixing C.I. floor traps size 100 mm Inlet and 100 mm Outlet Sand Cast Iron S&S as per IS: 1729 with C.P jalli all complete. | EACH | 2 | .0000024 |
| 2215.0 | Providing and fixing 100mm heavy duty UPVC floor traps with 100 mm inlet and 100 mm outlet & C.P jalli all complete. | EACH | 2 | .0000023 |
| 2216.0 | Providing and installing approved brand single tap water cooler of 80 L cooling capacity all complete. | EACH | 2 | .0000708 |
| 2217.0 | Providing and installing approved brand single tap water cooler of 150 L cooling capacity all complete. | EACH | 2 | .0000882 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 2218.0 | Providing and fixing white vitreous urinal partitions of size 675x325x85mm all complete. | EACH | 2 | .0000028 |
| 2219.0 | Providing and fixing eye and face drinking water fountain (combined unit with receptacle conforming to IS: 10592) all complete as per specification. | EACH | 2 | .0000516 |
| 2220.0 | Providing and fixing heavy duty cast iron pipes for above and below ground sanitary works with water tight lead joint, fixing clamps, excavation, filling, disposal etc. all complete for the following. | -- | | |
| a | 75mm dia pipes | RM | 2 | .000003 |
| b | 100mm dia pipes | RM | 2 | .0000038 |
| c | 150mm dia pipes | RM | 2 | .0000053 |
| d | 200mm dia pipes | RM | 2 | .0000082 |
| e | 250mm dia pipes | RM | 2 | .0000104 |
| 2221.0 | Providing, laying spun CI pipes with conforming to IS 1536 complete for following.(Excavation,backfilling,concrete to be paid separately) | -- | | |
| a | 75mm dia | RM | 1 | .0000017 |
| b | 100mm dia | RM | 1 | .0000025 |
| c | 150mm dia | RM | 1 | .0000036 |
| d | 200mm dia | RM | 1 | .0000056 |
| e | 250mm dia | RM | 1 | .0000067 |
| f | 300mm dia | RM | 1 | .0000085 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 2222.0 | Providing and fixing HDPE pipes in concrete/ brick work of following sizes including cutting, fixing and levelling in position etc. all complete. | -- | | |
| a | Upto 75 mm dia | RM | 2 | .0000002 |
| b | 100 mm dia | RM | 2 | .0000006 |
| c | 150 mm dia | RM | 2 | .0000012 |
| d | 200 mm dia | RM | 2 | .0000018 |
| 2300.0 | STRUCTURAL WORKS: Structural steel works including all labour, material (unless otherwise specified in BOQ/contract specification), equipments unless otherwise specified, transportation, handling etc. at all level as per specification, drawings and as directed by engineer - in - charge. | -- | | |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| A2301 | Collection of materials from BHEL stores, Transportation, Fabrication, erection and alignment of structural steel with mild steel rolled section / built up section / combination of both conforming to IS:2062, pipes conforming to IS:1161/ IS:1239, chequered plate conforming to IS: 3052, mild steel rounds, monorails, stays, safety chains, ladders, MS grating etc. in columns, beams, gantry girders, bunkers, silos, hoppers, roof trusses, portals, laced purlins, space frames, hangers, struts, monorails, galleries, stiffeners, wall beams, sheeting runners, brackets, stub columns, bracings, cleats, trestles, base plates, splice plates, chequered plate flooring, decking and seal plates, steel frame grid over false ceiling, walkway platforms, ladders, stairs, stringers, treads, landings, hand-rails etc including 2 coats of zinc-silicate primer (one coat at shop and one coat after erection, Dry film thickness of each primer coat shall be 50 microns.), connection design & preparation of fabrication drgs, collection of steel from stores, fabrication, straightening, cutting, bending, rolling, grinding, machining, drilling, welding, electrodes and other consumables, alignment, erection bolts & nuts (weight of erection bolts, nuts and welds not payable), assembly, edge preparation, preheating (min preheat and interpass temperature of 200 C for welding over 20 mm and upto 40 mm & 660 C for welding over 40 mm and upto 63 mm & 1100 C for thickness over 63 mm & use of low hydrogen/ radiogenic electrodes), post heating, testing of welders, inspection of welds, visual inspection, non destructive and special testing, rectification and correction of defective welding works, production test plate, inspection and testing, erection scheme, protection against damage in transit, stability of structures, installation of temporary structures, setting column bases, surface preparation by means of manual or mechanical power tools as per IS:1477 part 1, touch-up painting, rectification, dismantling and removal of all temporary structures (weight of temporary structures not payable), return of surplus / waste steel materials to store etc all complete. Including appointment of a separate agency, approved by BHEL, for review and approval of fabrication drgs, in consultation with BHEL (BHEL to supply steel free of cost). | MT | 25 | .0006666 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| A2302 | Extra over ST NO. 2301 for blast cleaning by shot / metal blasting of steel structures to near white metal surface(Sa 2 1/2) as per SIS05-5900 and applying 2 coats of zinc silicate primer (one coat at shop and one coat after erection) instead of primer coat of red oxide zinc-chromate, including touch-up painting etc all complete as per specification. | MT | 25 | .0001447 |
| A2305 | Providing and applying two coats of High built epoxy finish paint of approved brand over steel sections already having primer coats. Dry film thickness of each finish coat shall be 90 microns. The undercoat and finish coat shall be of different tint to distinguish the same from finish paint. The total dry film thickness with primer shall not be less than 300 microns. The item includes protection, cleaning, scaffolding, touch-up painting etc. all complete as per specification. | MT | 25 | .0001199 |
| 2322.0 | Supply, fabrication and fixing of GI pipe hand railing (900 mm high) of 32 mm/40 mm dia (Medium Grade) including transportation, loading/unloading, painting etc. all complete.. | MT | 68 | .0078001 |
| 2336.0 | Supply and erection of Hand Rail including galvanization at rate of 610 gm/sqm for with Elbows all complete as per specification. Pipes shall conform to IS: 1161 . | MT | 19 | .0021795 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 2337.0 | Coal Storage Shed; Design, Supplying, providing, fabricating, welding, Painting, short Blasting (if required), handling, assembling and fixing in position, erecting at site at all heights tubular space frame structure system to support roof and consisting of electric resistance welded tubes/pipes confirming to IS: 1161/1239 and forged/machined mild steel cones/ props/ tube end connectors, solid forged spherical node connectors, high tensile bolts, support system, stubs and mild steel base plate and other structural members conforming to IS: 2062 like runners, purlins , mild steel base plate, other accessories etc., for Coal stock piles as per the technical specification, approved drawings & datasheet by BHEL/TANGEDCO and including transportation, cutting, threading, machining, leads and lifts up to all heights, tools and plants and necessary scaffolding etc. required for all operations involved. The structure shall be covered with Colour coated Galvalume sheet with total coated thickness (TCT) of 0.80 mm with galvanization rate of 275gm/sqm. Sky light shall be provided as per the functional requirement. The outer side(exposed face) shall be permanently colour coated with Polyfluro Vinyl Coating (PVF2) of Dry FilmThickness (DFT) 20 microns (min) over primer. Inner side of external sheet shall be provided with suitable pre-coating of minimum 7 microns. (The Supplier for Covered shed shall be approved by Customer/BHEL) (Supply of sheeting material and steel structure in vendor scope). Since, part of the coal shed is in the scope of this package, Bidder to note that the design of coal shed should be matching with the other part of the coal shed and to be executed as per the instructions of BHEL Engineer in charge at site. | MT | 1,100 | .155472 |
| 2400.0 | ROAD WORKS: Road works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. as per specification, drawings and as directed by engineer - in - charge. Cement will be supplied by BHEL as a free issue | -- | | |
| 2401.0 | Preparation of sub grade by excavating earth to required depth for all types of soil/ rock, dressing to camber and consolidating the base including making good the undulation etc and disposal of surplus earth within a lead upto 1 km etc. all complete. | CUM | 12,500 | .0007887 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| 2402.0 | Supplying and filling with selected good earth of approved quality in layers not exceeding 300 mm loose thickness using borrowed soil (borrowed soil to be arranged by the bidder) and compacted so as to achieve at least 95 % maximum dry density as per IS-2720 (Part-VII) including royalty/seignorage fee (if any), sorting, spreading, breaking clods, watering, ramming/compaction by manual/mechanical means, dressing, finishing to required lines, grades and slopes, tesing etc all complete. | CUM | 30,000 | .013629 |
| 2403.0 | Providing, stacking & laying granular morrum for shoulder including watering, compaction with road roller to required camber etc all complete. | CUM | 500 | .0004101 |
| 2404.0 | Providing & laying water bound macadam sub base course in layers of required thickness with crushed stone aggregates 90 to 40 mm down size (IRC 19 - grading -1), stone screening & blinding material including screening, sorting, spreading to template & consolidation with road roller including carriage, spreading & consolidation of blinding material moorum etc all complete. | CUM | 2,500 | .0044326 |
| 2405.0 | Providing & laying water bound macadam base course in layers of required thickness with stone aggregate 63mm to 40mm size(IRC 19 - grading -1), stone screening and blinding material including screening sorting, spreading to template and consolidation with road roller including carriage, spreading and consolidation of blinding material moorum etc all complete. | CUM | 2,250 | .0038502 |
| 2413.0 | Supplying and laying 400mmx150mmx350mm deep precast concrete kerb stone of grade M-20 with 20 mm nominal size stone aggregate and of shape as per detailed drawing including fixing with cement mortar (1:2) in 13mm thick joints, finishing of joints with neat cement paste, making drainage opening where required etc all complete. | RM | 2,000 | .000952 |
| 2415.0 | Supply and laying 150mm dia R.C.C NP-2 type Hume pipe in raised shoulders as rain water drains as per detailed drawing including fixing with cement mortar (1:3) in 13mm thick joints, finishing of joints with neat cement paste etc all complete. Payment terms - a) On receipt of materials at site - 50%; b) On completion of erection & fixing - 50%. | RM | 200 | .0000813 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|---|----------------------------|-------------|---|
| 2418.0 | Concrete of grade M10 (1 part cement, 3 part sand, 6 parts of 40 mm graded aggregate by volume) as lean concrete, levelling course, mud mat under and around foundations/floors at any depth below finished floor level etc. | CUM | 500 | .0014613 |
| 2419.0 | Providing and laying cement concrete of grade M30 using 20 mm nominal size stone aggregate with approved admixture (if required), provision for necessary joints including compaction, finishing to lines and grades, curing and providing & fixing forwork etc. all complete. (Excluding the cost of reinforcement and dowel bar) | CUM | 1,500 | .0053134 |
| 2420.0 | Supplying and filling sand for preparation of read sub-base/ sub-grade in layers not exceeding 250 mm thickness and compacted so as to achieve at least 80% relative density as per IS-2720 (Part-XIV) including spreading, watering, ramming/ compaction by manual/ mechanical means, dressing, royalty (if any) etc all complete. | CUM | 50 | .0000904 |
| 2421.0 | Providing & laying dry lean cement concrete of grade M15 with 20 mm nominal size graded stone aggregate over a prepared sub-grade including compaction, finishing, curing etc all complete. | CUM | 6,425 | .0202376 |
| -- | REINFORCEMENT | -- | | |
| A 2422 | Supplying and laying impermeable plastic sheeting of 125 microns thick laid flat without creases between concrete pavement slab and the sub base all complete as per specification and direction of engineer-in-charge. | SQM | 2,400 | .000212 |
| A 2423 | Fixing in position MS dowel bar reinforcement including surface painted with bitumen and greasing, dowel end caps with cotton fills etc all complete as per specification, drawing and as directed by Engineer. | MT | 1 | .0000131 |
| -- | MISCELLANEOUS | -- | | |
| A2425 | Providing & installation of bitumen impregnated fibre board of specified thickness confirming to IS 1838 as joint filler including nailing, coating of both faces with coal tar pitch/bitumin etc. all complete as per specification, drawing and as directed by engineer. | RM | 250 | .0002108 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|----------------|--|----------------------------|-------------|---|
| A2426 | Providing and filling in position hot applied bitumen sealing compound (Grade A) of specified thick confirming to IS 1834 including cleaning, mixing, heating, pouring/injecting sealing compound in gaps in joints, sealant primer etc all complete as per specification, drawing and as directed by Engineer. | RM | 250 | .000011 |
| 2427.0 | Providing & laying 80 mm thick precast interlocking concrete pavers of approved colour and pattern as per specification and recommendation of manufacturer. | SQM | 250 | .0002041 |
| 2428.0 | Providing and laying 100mm thick sand layer below concrete pavers including compaction etc all complete as per specification, drawing and as directed by Engineer. | SQM | 250 | .0000474 |
| 2429.0 | Providing and laying Inverted Choke with 25 mm course of screenings (Grading-B) over prepared subgrade including compaction etc all complete as per specification, drawing and as directed by Engineer. | CUM | 100 | .0000092 |
| 2600.0 | LEVELING & GRADING: Levelling & grading works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. as per specification, drawings and as directed by engineer - in - charge. | -- | | |
| 2601.0 | Cutting of trees having girth more than 300 mm measured at a height of 1m above ground level including removal of roots, stacking the serviceable material like trunks,branches etc at specified area within the plant boundary and disposal of unserviceable parts/materials within a lead upto 1km etc all complete. | -- | | |
| a | 300 mm upto 600 mm girth. | Nos | 75 | .0000293 |
| b | 601 mm upto 1200 mm girth. | Nos | 65 | .0001139 |
| c | 1200mm and above. | Nos | 10 | .0000815 |

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1996 for Balance Civil & Architectural works of Coal Handling Plant - Package-1 at 2x660MW Udangudi STPP

at Udangudi Thermal Power Station

| Ref.No. | Description | Unit of Measurement | Qty. | Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount |
|------------------------|---|----------------------------|-------------|---|
| A2602 | Earth work in stripping of top soil upto a maximum depth of 0.20m below ground level so as to exclude all debris, grass, vegetation, bushes, trees having girth upto 300 mm including roots and organic materials etc for leveling and grading including dressing to specified levels & grades and compacting the graded/stripped surface by manual/mechanical means, disposal of stripped materials within a lead upto 1km etc all complete as per specification, drawing and as directed by the engineer-in-charge. | SQM | 455,000 | .0109095 |
| 2610.0 | Extra over ST No. 2601 to 2609 for carriage of unserviceable material/earth for every 500m or part thereof beyond an initial lead of 1km. | -- | | |
| a | Carriage for stacking/ backfilling of serviceable material/ earth | CUM | 22,500 | .0002272 |
| b | Carriage for disposal of serviceable/unserviceable material/ earth | CUM | 37,500 | .0003786 |
| A2611 | Earth work in filling upto any depth below ground level for grading to proper grade and level in layers not exceeding 300 mm loose thickness so as to achieve at least 95% maximum dry density as per IS-2720 (Part-VIII) with approved borrowed soil (borrowed soil to be arranged by the bidder) and compacted as specified including supplying boorowed soil, royalty/seignorage fee (if any), sorting, spreading, breaking clods, watering, ramming/compaction by manual/mechanical means, dressing, finishing to required lines, grades and slopes, tesing, all lead and lifts etc all complete as per specification, drawing and as directed by the engineer-in-charge. | CUM | 350,000 | .3091943 |
| 2613.0 | Providing and laying 300mm thick good quality dry stone pitching on the slopes of earth fill/cut with approved quality of rock fragments including materials, testing, necessary excavations if any, compaction etc all complete as per specification, drawing and as directed by the engineer. | CUM | 1,000 | .00211 |
| TOTAL Weightage | | | | 1.0 |