
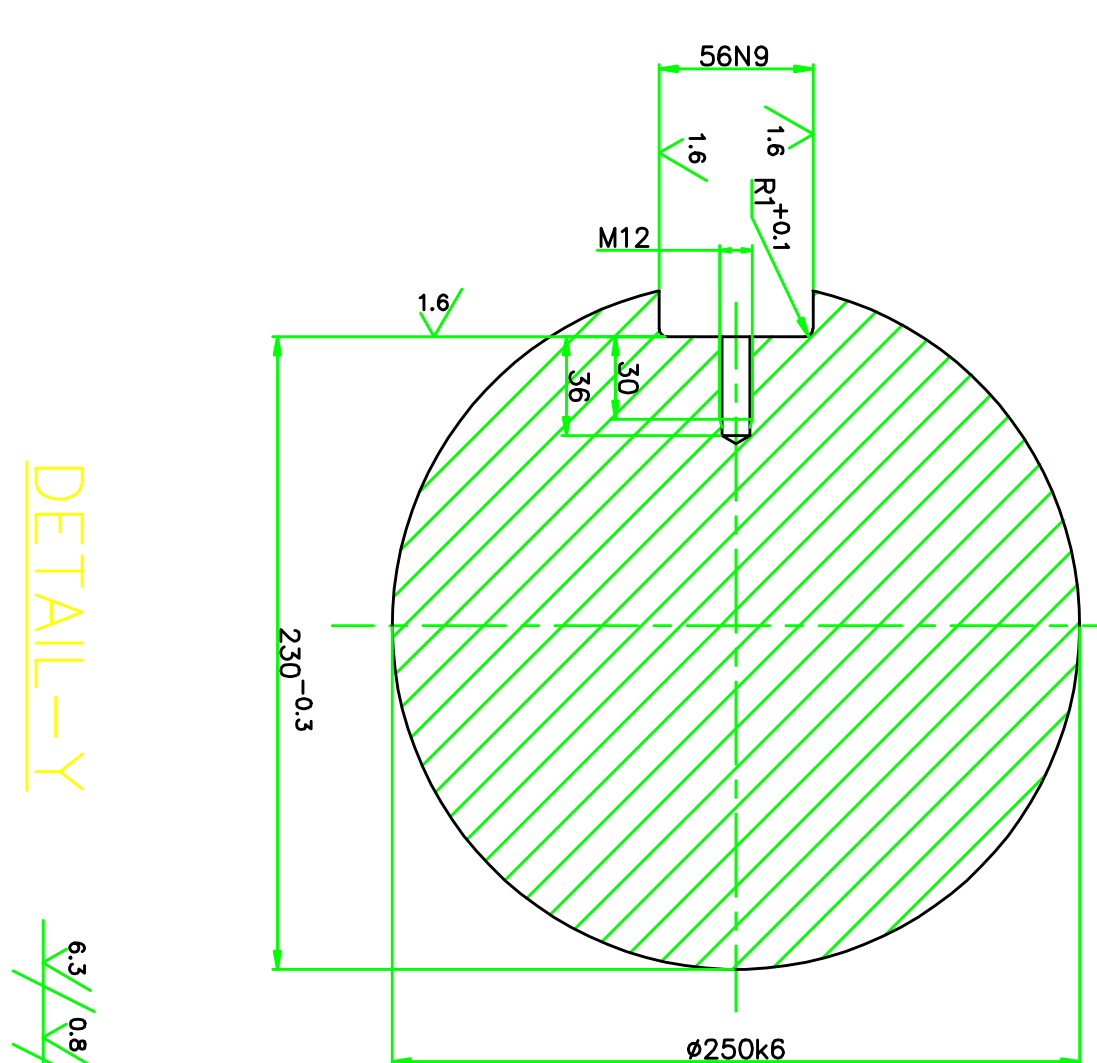
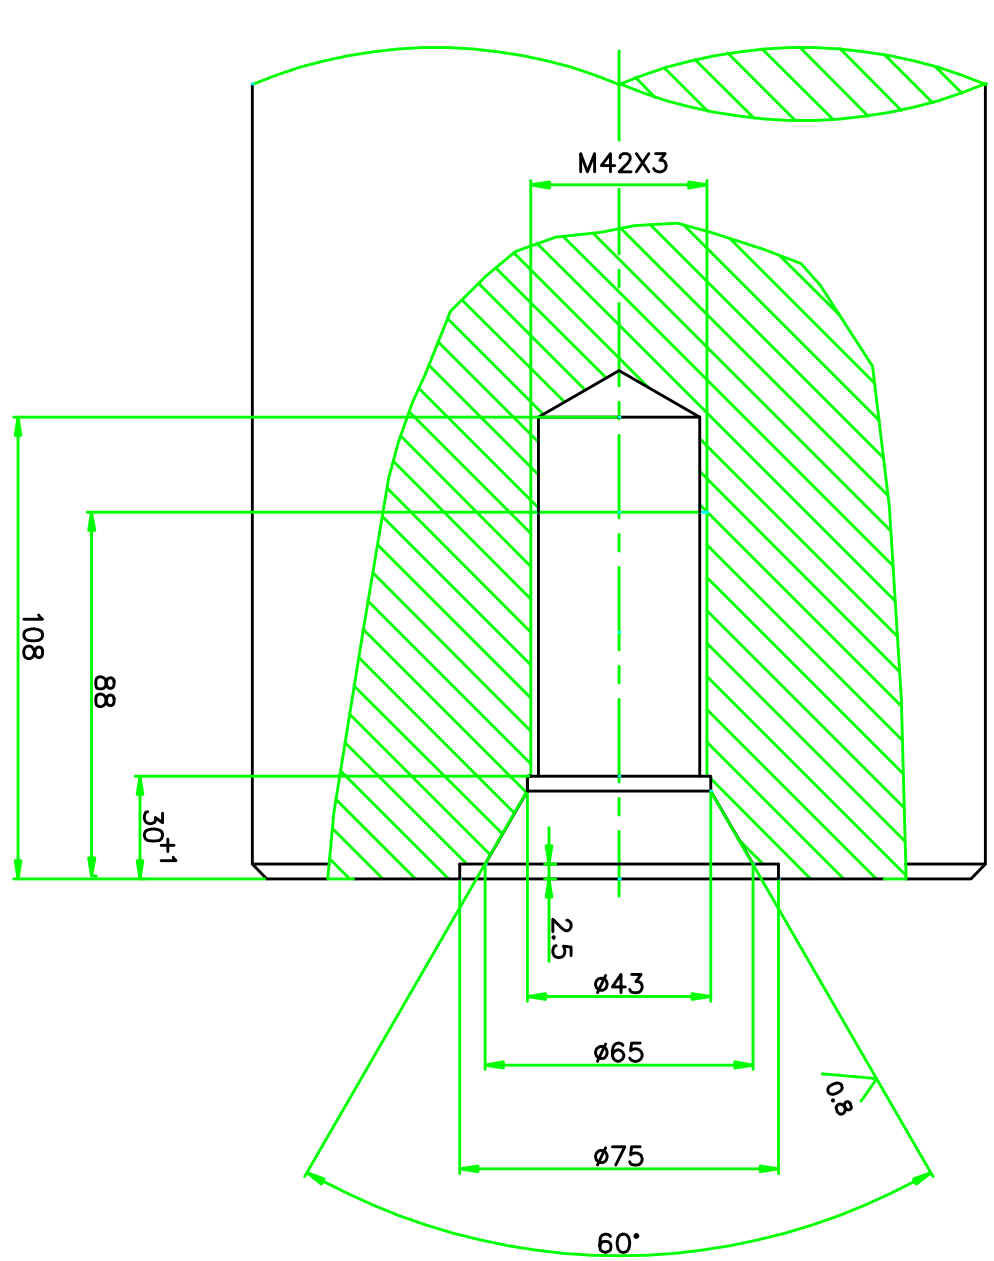




01. THREADED HOLES TO BE COUNTERSUNK BY 0.5X120°
02. BRACKETED DIMENSIONS ARE NOT FOR MANUFACTURE

07	RING			15.960	
08	PL 4002682/0721		P355 NH 2.3	2	
09	PL 4002682/0721			0.000	
06	SCREW M12x45			2	
05	PR KEY 565324x40		ASTM A105	6.000	
04	DBR 400		456.000	1	
04	PL 5501510/0725		P355 NH 2.3	1	
03	START PIN		1.375.000	1	
03	(FREE END)		ST 1550	1	
02	(FIXED END)		1650.000	1	
01	START TUBE		ST 1550	1	
				6.402.000	

1:10 9921.000

01. THREADED HOLES TO BE COUNTERSUNK BY 0.5X120°
02. BRACKETED DIMENSIONS ARE NOT FOR MANUFACTURE