



PREQUALIFICATION CRITERIA FOR
TRAIN SET (SLEEPER) 80 SETS PROJECT

PQC/PS4452979/CRU &
ERCU

Revision No. 00

Page 01 of 01

1.0 Pre-Qualification Criteria:

1.1 The bidder should be a manufacturer/supplier of the product for Rolling stock application of Railways for 3 phase IGBT based Train sets/RRTS/Semi high speed trains/AC EMU/MEMU/Metros in India or any railway systems in the world.

1.2 For supplies made in India, bidder should be approved vendor of Indian Railways /Metro/RRTS.

OR

For supplies made to any railway systems in the world, bidder shall provide approval, authenticated by country's recognized railway organization. Acceptance of such approvals will be at BHEL's discretion.

1.3 The product should have valid type test certificates complying to relevant latest IEC and other standards mentioned in the Reference Technical Specification for rolling stock application on the date of submission of the tender. The bidder shall fully comply with the type and routine test & inspection clause of the technical specification. The bidder shall conduct/ repeat type tests (as mentioned in Technical specification clause 2.6) either partially or fully **for the offered product** without any price implication to BHEL. Decision to conduct type test shall be at BHEL's discretion.

OR

The bidder shall provide valid type test certificate/ reports complying to relevant latest IEC and other standards for **similar product** supplied as per clause 1.1. Acceptance of such type test certificate/ reports will be at BHEL's discretion. In such case, bidder will be considered for technical evaluation. The bidder shall conduct type tests fully **for the offered product**, without any price implication to BHEL.

1.4 Those bidder(s) who are registered with BHEL/BHEL's customer (as the case may be) shall be considered for technical evaluation, subject to meeting above PQC clauses. Bidders who are not registered with BHEL/BHEL's customer (as the case may be) can also quote in the tender. However, their credentials will be assessed for consideration in the tender, before price bid opening, subject to meeting above PQC clauses.

2.0 Documents to be submitted:

All the relevant documents proof for points referred in 1.0 shall be submitted along with the tender.

COPYRIGHT AND CONFIDENTIAL
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED.
It must not be used directly or indirectly in anyway detrimental to the interest of the company.

Rev. 00

Approved:

S P Singh

Prepared: Raj
Kumar Pradhan

Checked: David J

Date:
09.05.2024

Bill of Material for Current Return Unit (CRU) and Earth Return Current Unit (ERCU) (Vande Bharat - Train for 32 Sets)					
Sl. No.	Material Code	Item Description	Qty per Rake (set)	Total qty. required for 32 Rakes (Set)	Remarks
1	PR2900000289	Earth Return Current Unit (ERCU) & Current Return Unit (CRU) assembly together as one set.	40	1,280	

Note -

All vendor must quote as per the quantities mentioned in this table and the quantities mentioned in the specification are for reference purpose only

ANNEXURE-1

Bharat Heavy Electricals Limited Electronics Division, Mysore Road, Bengaluru

Purchase Specification no -

Item - Current Return Unit (CRU) and Earth Current Return Unit (ERCU)

Vendor name - M/s

Price Format for Vande Bharat Train Sets

Sl. No.	Material Code	Item Description	Qty [A1]	Unit Rate in INR [A2]	Total Cost [A3=A1*A2]	Total Qty [A4]	Total Cost [A5=A2*A4]	Remarks
1	-	Equipment cost	Per rake	Per item	Per rake	For 32 rakes	For 32 rakes	
1.1	PR2900000289	Basic Price for Current Return Unit (CRU) and Earth Current Return Unit (ERCU)	40			1,280		
2		Commissioning & Supervision of Erection						
2.1		Commissioning & Supervision of Erection of Prototype Rake	2			2		
Total of sl no 1& 2								

Note -

- Any item required for functional integrity and commissioning of the item/system and not considered above shall be provided by the bidder without any cost implication to BHEL.
- Bidder shall quote as per the quantities mentioned in this table only. Quantities mentioned in the specification are for reference purpose.
- Tender evaluation shall be done on the total of sl. no. 1 & 2.
- Each rake consists of 16 coaches.

Checklist - Documents to be submitted by Bidder

Sl. No.	Particulars	Acceptable documentation	Submitted with Tender	Document/s submitted by bidder	Remarks by Bidder
1	PQC qualification documentation	<ul style="list-style-type: none"> RDSO/Indian Railways approval for Indian bidders Relevant PO copies Performance statements/certificate 	YES / NO		
2	Type test reports & protocol	<ul style="list-style-type: none"> Recent type test reports from NABL-accredited laboratory and/or protocol for Indian bidders Recent type test reports from international accreditation agencies for international bidders and/or protocol 	YES / NO		
3	Routine test protocol	<ul style="list-style-type: none"> Routine test protocol 	YES / NO		
4	QAP [Quality Action Plan]	<ul style="list-style-type: none"> QAP [Quality Action Plan] 	YES / NO		
5	Clause-by-clause compliance - duly signed & stamped	<ul style="list-style-type: none"> Signed & stamped copy of complete specification Bidder's document tabling each specification clause and indicating the compliance against each clause 	YES / NO		
6	No deviation format - duly signed & stamped	<ul style="list-style-type: none"> No deviation format, duly filled-in & signed/stamped 	YES / NO		
7	Drawings & datasheets if applicable	<ul style="list-style-type: none"> Drawing with all required data & BoM Datasheet with all required parameters mentioned & BoM Catalogue for standard product with all technical & dimensional details mentioned 	YES / NO		
8	HL3 compliance	<ul style="list-style-type: none"> Certificate from NABL approved lab or any International accreditation agency 	YES / NO		
9	Bill of Materials	<ul style="list-style-type: none"> Unpriced copy of price format indicating "Quoted" against each line item 	YES / NO		
10	Spares for 35 years' maintenance requirement	<ul style="list-style-type: none"> Preventive & Corrective Maintenance Schedule with list of spares, in line with Chapter-5 of Technical Specification. Unpriced list of above spares with yearly consumption including replacements. 	YES / NO		
11	Checklist	<ul style="list-style-type: none"> This checklist duly filled-in 	YES / NO		
12	Contact details for correspondence	<ul style="list-style-type: none"> Email & contact details of representative to contact for technical & commercial queries 	YES / NO		
13	Authorization for bid signing	<ul style="list-style-type: none"> Notarized/suitable valued bond paper stating authorization for bid signing 	YES / NO		
14	Formats in tech spec	<ul style="list-style-type: none"> All formats to be filled which are part of the technical documentation . 	YES / NO		
15	RAMS Documentation	<ul style="list-style-type: none"> Sample documents on RAMS compliance (as applicable) as per Chapter-4 of Technical Specification. 	YES / NO		

Note to bidder -

1	Bidder shall necessarily fill this checklist and upload it as a part of the documentation towards this tender. Incomplete documentation may make your offer liable for rejection
2	Bidder shall upload the documents in a logical sequence & include a table of content clearly indicating the page numbers
3	This list is not exhaustive & BHEL may ask for additional documentation from bidders in the course of evaluation of the offers



BHARAT HEAVY ELECTRICALS LIMITED
ELECTRONICS DIVISION
 Mysore Road, Bangalore

DOC. NO: PS4452979-part A
REV. NO: 01
Page 1 of 36




COPYRIGHT AND CONFIDENTIALITY
 The information on this document is the property of
BHARAT HEAVY ELECTRICALS LTD.
 It must not be used directly or indirectly in anyway detrimental to the interest of the company

CUSTOMER/ USER	BHEL/INDIAN RAILWAYS
PROJECT	Manufacturing cum Maintenance of Vande Bharat Trainsets

TECHNICAL SPECIFICATION

Current Return Unit (CRU) and Earth Return Current Unit (ERCU)

01	09.05.2024	RK Pradhan	David J	SP Singh	List of Test added at Clause No. 2.6)
Rev No.	Date	Altered	Checked	Approved	Revision Details

Issued by: Traction Engg. Dept., BHEL-EDN	APPROVED  S P Singh		
	PREPARED  Raj Kumar Pradhan	CHECKED  David J	DATE 09.05.2024



	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	


Table of Contents:

SECTION – 1	4
SCOPE, QUANTITIES & ELIGIBILITY.....	4
1.1 SCOPE	4
1.2 BILL OF MATERIAL:	4
1.3 ELIGIBILITY CRITERIA.....	5
1.4 CLAUSE BY CLAUSE COMPLIANCE	5
SECTION – 2	6
TECHNICAL SPECIFICATION	6
2.1 GENERAL:.....	6
2.2 FUNCTION OF THE GROUNDING CONTACT OF CRU & ERCU	6
2.3 TECHNICAL REQUIREMENTS OF CRU & ERCU:	7
2.4 APPLICABLE STANDARDS:.....	8
2.6 EQUIPMENT TESTING	8
2.7 DESIGN REQUIREMENTS TO BE PROVIDED BY SUPPLIER:	10
SECTION – 3	11
PROJECT DETAILS AND GENERAL SPECIFICATIONS.....	11
3.1 GENERAL.....	11
3.2 INSTRUCTION TO BIDDERS	11
3.3 GENERAL DESIGN REQUIREMENTS.....	11
3.4 INGRESS PROTECTION	14
3.5 AMBIENT CONDITIONS / OPERATING CONDITIONS.....	15
3.6 STANDARDS	16
3.7 ENGINEERING DATA	17
3.8 MARKING OF EQUIPMENT & RATING PLATE.....	18
3.9 INFRINGEMENT OF PATENT RIGHTS.....	18
3.10 DOCUMENT SUBMISSIONS.....	19
3.11 QUALITY ASSURANCE PROGRAMME	19
3.12 QUALITY ASSURANCE DOCUMENTS	20
3.13 TYPE AND ROUTINE TESTING & INSPECTION	20
3.14 MATERIALS AND WORKMANSHIP	22
3.15 PACKING, STORAGE AND HANDLING INSTRUCTIONS	22
3.16 FIRE PREVENTION	23
SECTION – 4	24
RELIABILITY, AVAILABILITY, MAINTAINABILITY AND SAFETY (RAMS)	24
4.1 KEY PERFORMANCE INDICATORS	24
4.2 RELIABILITY AVAILABILITY MAINTAINABILITY AND SAFETY (RAMS).....	24

	<p align="center">TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)</p> <p>DOC. No.: PS4452979, PART-A, REV No. 01</p>	<p align="center">PROJECT- ICF Trainsets</p>
--	---	---

4.3 RAMS DOCUMENTATION	25
4.4 SERVICE LIFE OF EQUIPMENT/SYSTEM.....	25
4.5 TRAIN MAINTENANCE SCHEDULE (TENTATIVE)	27
SECTION -5	28
SPARES AND CONSUMABLES FOR MAINTENANCE	28
5.1 SPARES AND CONSUMABLES	28
5.2 SCHEDULED MAINTENANCE	28
5.3 UNSCHEDULED MAINTENANCE	29
5.4 EPIDEMIC DEFECT WARRANTY	29
5.5 OPERATION AND MAINTENANCE MANUAL	29
5.6 OBSOLESCENCE MANAGEMENT.....	31
Annexure-B	32
PERFORMA FOR PERFORMANCE STATEMENT	35
REVISION HISTORY	36

CONFIDENTIAL

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

SECTION – 1

SCOPE, QUANTITIES & ELIGIBILITY

1.1 SCOPE

This technical specification covers the requirements of design, manufacture, testing at works, packing and dispatch of Current Return Unit (CRU) & Earth Return Current Unit (ERCU).

The equipment is required for the following project.

Name of the customer : BHEL/INDIAN RAILWAYS
Name of the Project : Manufacturing cum Maintenance of Vande Bharat Trainsets


The scope shall also include the followings:

The supply of complete documentation for approval of design, relevant drawings and calculations to the satisfaction of purchaser and RDSO and support documentation associated with the operation and maintenance of the equipment supplied.

The supplier shall submit list of equipment and facilities required for maintenance and overhaul of equipment offered.

1.2 BILL OF MATERIAL:

Sl. No.	Description	Quantity per Rake (16 car)	Remarks
1.	Current Return Unit (CRU) & Earth Return Current Unit (ERCU) assembly together as one set.	40 set	Typical Picture are given in Annexure-B for reference
2.	Mounting hardware (Cables support clamp, Nuts, bolts, Washer, Top Cover / Cover cap, End plate which connect with Rail axle, Brushes, Brush Holder, sealing plat, insulating spacer, clamping plate, slip disc etc. Complete set of hardware's required to fixing CRU & ERCU with Rail axles is in vendor scope.)	40 set	All mounting hardware shall be Stainless steel A2-70/304. Mounting details to be finalized during design stage in consultation with ICF/RDSO/Indian Railways.
3.	Other Accessories Required For Mounting and Electrical Connections including end plate	As reqd.	

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU) DOC. No.: PS4452979, PART-A, REV No. 01	PROJECT- ICF Trainsets
--	--	-----------------------------------


1.3 ELIGIBILITY CRITERIA

The Bidder should be a regular supplier to Indian Railway Projects and should have supplied the offered equipment for Indian Railways projects of 3 phase IGBT Based AC EMU / MEMU / Metros / Trainsets / Locomotives operating in India.

1.4 CLAUSE BY CLAUSE COMPLIANCE

Vendor to submit clause by clause compliance to complete technical specification along with the technical bid.

CONFIDENTIAL

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

SECTION – 2

TECHNICAL SPECIFICATION

2.1 GENERAL:

- (a) The CRU and ERCU is an axial operating sliding contact for the return operating currents of the main Transformer primary current and for the earthing of the Trainset vehicle. Electrically insulated for the protection of the roller ends the ERCU closes the electrical circuit to the rotating wheel set shaft.
- (b) The grounding cable carries the reverse current from the coach body pivoted bogie via a sliding contact to the wheel set shaft, from where it can flow into the rail via the wheel. The critical point in the reverse current flow is the roller bearing or the wheel set roller bearing is bypassed in a controlled manner.
- (c) The CRU & ERCU is attached on the wheel set. The brush holder is insulated to the wheel set end cover. A contact disc which is used as contact surface is mounted on the pressure cap of the wheel set. The CRU & ERCU has a connection point on the brush holder for the grounding line.
- (d) Pressure device shall always be engaged with required pressure to the Brush Guide to ensure proper contact all the operating time.

2.2 FUNCTION OF THE GROUNDING CONTACT OF CRU & ERCU

Grounding Contacts are playing important role in CRU & ERCU assembly:

Grounding Contact serve as low resistance to transmit current from stationary vehicle parts to rotating vehicle parts.

The main functions of the grounding contact are:


- Transmission of operating current
- Transmission of signal current
- Vehicle grounding and / or protective grounding.

The grounding contact is responsible for producing a safe electrical connection to a defined current path in all operating situations of the vehicle.

The operational and functional safety is only given if the grounding contact is undamaged and the contact area is free of grease, oil and moisture.

2.2.1 Transmission of Operating Current

The operating current for Trains set / Electrical locomotive take from overhead single phase line. These current passes via. Main Transformer primary winding to running rail via. axle shafts and wheels and make return path to circuit.

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

Current is transmitted from stationary part of Train set to vehicle running rotating axles and wheels via. special arrangement called Grounding Contacts and total Set of this unit called as “Current return Unit (CRU)”.

2.2.2 Transmission of Signal Current

Unlike operating current these current are low value current in the form of various alarm and signalling system need also to be grounded via. same Grounding Contact with high reliability in all operating condition.

Material combination of Grounding Contact Brush shall provide very low resistance path in all operating condition and should have long life.

2.2.3 Vehicle Grounding and/ or Protective Grounding

Grounding of each HV, MV, LV Electrical Equipment’s, Electronic Components and providing potential free contacts at all the time to the person traveling inside the Train for safety point of view is also to be done through same Grounding Contacts named as “Earth return current unit (ERCU)”.

It shall also pass all the Leakage current, Surge current & Short circuit current if occur in the Train through CRU & ERCU to the rotating Rail axles and wheels without damaging any Part of Electrical equipment’s of the Train and without harming any Person travelling by Train.

2.3 TECHNICAL REQUIREMENTS OF CRU & ERCU:


2.3.1 Technical Details

Dimension Details	
Mounting	Axial

Technical Data	
Rated Current	≥ 400 A
Short time withstand current	≥ 600 A for 1 Hr ≥ 6 kA rms for 100 ms
Number of carbon brushes	2 No. (refer clause 2.3.2)

2.3.2 The assembly CRU & ERCU shall consist of three slot for Carbon brush each 200 A, the 3rd slot shall be free for additional 3rd Carbon Brush of 200 A accommodation for future requirement.

2.3.3 CRU & ERCU shall be made of a steel cover with a zinc-nickel treatment or Aluminium Alloy. It shall be a Three (3) stainless steel spring system with Tinned connections for 3 brushes, made of a mix of copper and carbon powders compressed under high pressure.

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

2.4 APPLICABLE STANDARDS:

Standard	Description
EN 50110-1	Operation of electrical installations
EN 50153	Railway applications - Rolling stock - Protective provisions relating to electrical hazards
IEC 60529	Degrees of protection provided by enclosures (IP - Code)
EN 45545-1: 2013	Railway applications-Fire protection on railway vehicles
IEC 61373: 2010	Railway applications – Rolling stock equipment – Shock and vibration tests: The vibration levels at some intermittent points on the track may be higher than those specified by the relevant IEC 61373 publication. The suspension system and the mounting arrangements shall be so designed that the equipment’s performance is not adversely affected due to such high vibrations and shocks.

2.5 In addition to the above mentioned technical requirements, the offered equipment must comply to relevant IECs/other applicable standards.

2.6 EQUIPMENT TESTING

(1) Valid Type test report is to be submitted for the equipment along with offer as per the list of tests mentioned below & as per clause 2.4) for this equipment along with offer, if the equipment is already type tested. In case, ultimate customer insists to repeat the type tests due to any reason, the type test shall be conducted again by the supplier, for which test procedure shall also be submitted by the supplier for approval before conducting the Type test. In case ultimate customer desires to witness the Type tests, the supplier shall have no objection. The cost of such type test if any shall be on the account of the supplier and supplier shall include the cost in the price offer of the equipment.

Sl. No.	List of Type Test	Required Criteria
A)	Visual Test	
i)	<u>Appearance</u>	No mechanical damages, scratches, signs of corrosion or any other visible
ii)	<u>Dimensional check</u>	All dimensions should be within the tolerance
ii)	<u>Quality Requirement: The total mass of the grounding contact + contact disc</u>	Near to 5 Kg
B)	Functional checks	
i)	<u>Brush Pressure</u>	Brush pressure should be near 300 cN/cm ² with a tolerance of +15 % / - 30 %.




**TECHNICAL SPECIFICATION FOR
Current Return Unit (CRU) & Earth Return
Current Unit (ERCU)**

**PROJECT- ICF
Trainsets**

DOC. No.: PS4452979, PART-A, REV No. 01


ii)	<u>Movement of the Brush in the Brush guide</u>	The brush must be able to move freely in the brush guide
iii)	<u>Movement of Brush Cable</u>	The brush needs to be moved as specified without being hindered by the brush cable. The brush cable must not scrape on the sharp edges of the constant spring.
iv)	<u>Brush Wear Test</u>	The wear rate near to the 3 mm / 100000 Km.
C) Electrical checks		
i)	<u>Insulation Test:</u> (DIN IEC 60167 VDE 0303 / IEC 62631-3-3)	The insulation resistance must be > 20 MΩ.
ii)	<u>Contact Resistance Test</u>	≤ 20 mΩ per complete Grounding Contact system
iii)	<u>Rated Current Test:</u> The test will be simulated with a vehicle speed of near to 160 km/h and different current loads for the whole current load test	The voltage drop of the grounding contact must not be more than 1.2 V.
	<u>Current Load Test:</u> Test Rig shall be of speed near to 250 Km/h, For 2 Carbon Brush for continuous current load 400A are supplied and to verify the overload current 600 A. For 3 Carbon Brush for continuous current load 600A are supplied and to verify the overload current 900 A.	≤ 90°C, The contact cell must not be damaged and has to be fully functional.
	<u>Surge Current Test / Short Circuit Test</u>	≥ 600 A for 1 Hr ≥ 6 kA rms for 100 ms
D) Mechanical checks		
	<u>Shock and Vibration Test:</u> (IEC 61373)	Category - 3
E)	Protection degree test: (DIN EN 60529 / IEC 60529)	IP 65
F)	Fire and Smoke Analysis: (EN 45545-1)	HL3

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

- (2) Supplier to submit Routine test certificates and inspection certificate of equipment as per QAP along with equipment.
- (3) Type and routine test will also confirm to clause 3.13 of section 3 of technical specification.

2.7 DESIGN REQUIREMENTS TO BE PROVIDED BY SUPPLIER:

<ul style="list-style-type: none"> • Write-up/ description of each equipment 	To be provided by Supplier
<ul style="list-style-type: none"> • Datasheet of the equipment 	To be provided by Supplier.
<ul style="list-style-type: none"> • Circuit diagram, connection & wiring diagram, equipment drawing with mounting details, weights, center of gravity, etc. and any other relevant drawings. 	To be provided by Supplier
<ul style="list-style-type: none"> • Type test protocol & procedure/ Type test reports 	Supplier to submit the complete reports of type test already conducted on the proposed/offered equipment. In case type test is required to be done, supplier to submit the detailed test procedures for approval.
<ul style="list-style-type: none"> • Routine test protocol & procedure/ Routine test reports 	Supplier to submit Routine test certificates and inspection certificate of equipment as per QAP along with equipment
<ul style="list-style-type: none"> • Details of proven design 	To be provided by Supplier
<ul style="list-style-type: none"> • Performance statement 	To be provided by Supplier in the attached format.
<ul style="list-style-type: none"> • Performance certificate 	To be provided by Supplier in the attached format.
<ul style="list-style-type: none"> • RDSO Approval letter (conforming to the latest RDSO spec as applicable) 	To be provided by Supplier
<ul style="list-style-type: none"> • Project specific AUTO CAD drawing-2D and 3D model 	To be provided by Supplier after order placement
<ul style="list-style-type: none"> • Project Specific Drawings in A3 size 	To be provided by Supplier
<ul style="list-style-type: none"> • Technical Manual 	To be provided by Supplier
<ul style="list-style-type: none"> • Installation, Operational and Maintenance Manual 	To be provided by Supplier
<ul style="list-style-type: none"> • MTBF/MDBF Values along with the method of calculation 	To be provided by supplier
<ul style="list-style-type: none"> • Quality assurance plan (QAP) 	To be provided by supplier

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

SECTION – 3

PROJECT DETAILS AND GENERAL SPECIFICATIONS

3.1 GENERAL

This section stipulates the General Technical Requirements under the contract and forms an integral part of the Technical Specification. The provisions under this section are intended to supplement general requirements for the materials, equipment and services covered under other sections and are not exclusive.

However, in case of conflict between the requirements specified in this section and requirements specified under other sections, the requirements specified under respective sections shall hold good.

The Train shall be Distributed Power type which shall have Driving Cabs on its both ends and shall be capable of running in either direction without the requirement for any change in its composition. Configuration of 16-car rake shall be two End Basic Units and two Middle Basic Units.

The configuration of Vande Bharat express (Trainsets) is as under (for reference):

DTC-MC-TC-MC-MC-TC-MC-NDTC-NDTC-MC-TC-MC-MC-TC-MC-DTC

Where,

DTC: Driving Trailer Coach

MC: Motor Coach

NDTC: Non-Driving Trailer Coach

TC: Trailer Coach

3.2 INSTRUCTION TO BIDDERS


The bidders shall submit the technical requirements, data and information as per the technical specification, provided in Section-2.

The bidders shall furnish catalogues, engineering data, technical information, design documents, drawings etc. in English language, fully in conformity with the technical specification.


Whenever required, the bidder shall depute his technical experts to RDSO / nominated agency for design discussions and approval.

3.3 GENERAL DESIGN REQUIREMENTS


- i) The stock fitted with the supplied equipment shall meet the operating, service conditions and performance requirements of this specification and shall be suitable for operating conditions on IR.

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

- ii) All equipment shall be vandal proof and incorporate necessary anti-pilferage features without compromising aesthetics / maintainability.
- iii) Notwithstanding the contents of this specification, the Supplier shall ensure that the equipment supplied by them is complete in all respect so as to achieve the efficient operation & optimum performance of the Train set.
- iv) The equipment design shall incorporate all essential features necessary to yield high traffic use, low maintenance requirements, easy maintainability, high regeneration, high efficiency, light in weight, user & environment friendly and high reliability in train operation. The design shall also facilitate easy erection, inspection, maintenance and replacement of the sub-units/ assemblies of all the equipment.
- v) The entire equipment shall be designed to ensure satisfactory and safe operation under the running conditions mentioned in this specification duly taking care of sudden variations in load, voltage etc. under abnormal working conditions due to faulty operation, short circuits & earth faults etc.
- vi) Wherever applicable: Airflow inlet/ arrangement for forced cooled equipment shall be designed in such a way that cloth, polythene, papers etc., which may get sucked, either do not block the airflow or get removed during halts. Moreover, filter should be easily cleanable.
- vii) All working parts of the control and auxiliary circuit specifically electronics and PCBs, shall be suitably covered to keep them free from moisture, mold growth and dust. The protection level shall be furnished by the Supplier during design approval.
- viii) All the electrical equipment shall comply with the latest edition of governing IEC specifications unless otherwise specified. The temperature rise shall be measured according to the procedure stipulated by IEC and shall comply with the limits specified and the ambient conditions defined in the Specification.
- ix) All equipment shall be adequately earthed, insulated, screened or enclosed. They shall be provided with essential interlocks & keys as may be adequate to ensure the protection of the equipment and the safety of those concerned with its operation and maintenance.
- x) Wherever applicable: Supplier shall to the extent feasible employ the currently available lubricants/cooling oils in India. Full lubrication scheme and schedule for the equipment shall be submitted. If use of imported lubricants or cooling oil is inevitable, supplier shall furnish details of equivalent Indian lubricants/oil.
- xi) Supplier shall submit 3D models of offered equipment including associated sub-assemblies, etc. in. stp formats.

	<p align="center">TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)</p> <p>DOC. No.: PS4452979, PART-A, REV No. 01</p>	<p align="center">PROJECT- ICF Trainsets</p>
--	---	---

- xii) The design of the equipment shall be based on sound, proven and reliable engineering practices. The equipment used in different sub systems shall be of proven technology and design. The supplier shall submit the supportive document for each of the assembly/sub-assembly for its proven performance under the environmental conditions prevalent in India.
- xiii) The supplier shall design the mounting arrangements suitable for coaches. The accessories for mounting the equipment shall be part of the scope of supply. The hardware for mounting, safety links for underslung equipment, the termination hardware also will be in the scope of supply for all equipment.
- xiv) SOFTWARE (WHEREVER APPLICABLE)
- a. Software shall be written in a structured manner and fully documented during all stages of its design and development. This shall meet the requirements of EN 50126-2: The specification and Demonstration of Reliability, Availability, Maintainability and Safety (RAMS) - Part 2, EN 50128: Railway Applications: Software for Railway Control and Protection Systems, and EN 50129: Safety-related Electronic Railway Control and Protection Systems.
 - b. The Supplier shall submit the values of parameters, list of fault messages, their environmental data, hierarchy of fault display, fault categorization, trouble shooting of each fault by way of Changes in parameters shall be demonstrated with their effect on the results.
 - c. Parametric changes shall be possible in the software in order to meet the future requirements. While listing out the values of various parameters, the Supplier must provide a range within which any change can be made without jeopardizing the functionality of the system. Supplier shall submit the licensed software to the purchaser.
 - d. Software shall be fine-tuned through simulations & real life working conditions based on the extensive trials, associating BHEL / user Railways before putting the rake in commercial services. As it requires, instrumentation and expertise of Software Design Professionals, software expert(s) of Supplier shall be based at the work place along with commissioning engineers so that all software related issues are expeditiously resolved before putting the rake into commercial service.
 - e. Quality and efficacy of trouble shooting manual, software tools and software documentation shall be validated during extensive field trials. Final version of these documents shall include the changes required based on the service trials, commercial service operation, experience of operating Railways.


	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

- f. All the changes, thereafter, in software shall be approved by RDSO / nominated agency in consultation with user Railways before actual implementation and the Supplier must give software release, which shall include brief description of the problem, earlier as well as modified logic, explanation, parametric changes etc. to the satisfaction of RDSO / nominated agency.
- g. The Supplier shall submit Software Quality Plan for review before work commences on software design. The software quality plan shall clearly state the controls and practices used in the software life cycle from specification through to in-service operation.
- h. Internal independent review, verification & testing, using real & synthetic data, shall be performed at the software module and system level. RDSO/ nominated agency / BHEL / user Railway may audit the Supplier against the **Software Quality Plan** at any stage during the Contract. The Supplier shall ensure that all software is fully de- bugged prior to the final review by RDSO/user Railway.
- i. Sufficient software documentation shall be provided to give the full understanding of the software function, logics, parameters and operation. Documentation shall be complete, clear and concise, and include all modifications up to the final acceptance. Documentation shall clearly explain the software logics, associated parameters, include software block diagram showing signal flow, logic and hardware interfaces etc. A top level flow diagram and description of detailed operation shall be provided.
- xv) Notwithstanding the contents of this specification, the supplier shall ensure that the equipment supplied by them is complete in all respect so as to enable the desired operation of the Train fitted with their equipment.
- xvi) Supplier shall deliver the executable files of all developed software along with necessity tools to upload / download and carry out fault analysis.

3.4 INGRESS PROTECTION

- i) All equipment shall be suitably protected from dust and water. As a minimum, equipment shall be sealed to the standards stated below:

Under frame & externally mounted equipment (other than traction/ auxiliary converter/Traction Motor)	IP65
Battery Box and Brake Chopper	IP20
Equipment mounted inside the Car body	IP54

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

- ii) It may be necessary to protect some equipment to IP 67 in order to meet the requirements of Clause 3.4 of this Specification.

3.5 AMBIENT CONDITIONS / OPERATING CONDITIONS

The equipment shall be designed to work satisfactorily under following environmental conditions: -

Atmospheric temperature	Maximum temperature: 50 degrees Celsius Maximum touch temperature of metallic surface under the Sun: 75 degrees Celsius and in shade: 55 degrees Celsius Minimum temperature: - 10 degree Celsius
Humidity	100% saturation during rainy season
Solar radiation	1 kW/m ²
Altitude	1000 meter above mean sea level
Rain fall	Very heavy and continuous rainfall in certain areas (up to 2500 mm during rainy season)
Atmospheric conditions	Extremely dusty and desert terrain in certain areas. The dust concentration in air may reach a high value of 1.6 mg/m ³ . In many iron ore and coal mine areas, the dust concentration is very high affecting the filter and air ventilation system
Coastal area	Humid and salt laden atmosphere. The equipment shall function in accordance with this Specification when subjected continuously to a humid and salt laden atmosphere with maximum pH value as per IEC 60571, sulphate content of 7 mg per litre, maximum concentration of chlorine 6 mg per litres and maximum conductivity of 130 micro Siemens / cm.
Vibration	The vibration and shock levels recorded on various Sub-systems in existing Trains of IR are generally more than the limits given in IEC 61373 particularly at axle box, and traction motor. Accelerations over 50g have been recorded at axle box levels during run. Vibrations during wheel slips are of even higher magnitude. High level of vibrations above 30g have been measured at traction motor on IR's Trains, which increase up to 50g with worn gear- pinion.
Wind speed	High wind speed in certain areas, with wind pressure reaching 216 kg/m ² as per IS:875 Part 3(2015)



**TECHNICAL SPECIFICATION FOR
Current Return Unit (CRU) & Earth Return
Current Unit (ERCU)**


**PROJECT- ICF
Trainsets**

DOC. No.: PS4452979, PART-A, REV No. 01

Flood level	<p>The Train shall function in accordance with these Specifications and Standards in the event of flooding up to 203 mm above Rail Level as follows:</p> <ul style="list-style-type: none">• In the event of flooding at any level below Rail Level, the Train shall operate in full compliance with these Specifications and Standards.• In the event of flooding at a height between Rail Level and 203 mm above Rail Level, the Train shall operate in full compliance with these Specifications and Standards with the exception that it is permissible to restrict the operation of the Train to a maximum of 8 km/h. <p>Allowance is to be made in addition for increase in the height of water level due to the “bow wave” effect of the Train passing through the water.</p>
Flood Proofing of the under slung Equipment	<p>Waterproofing test will be conducted on Traction and Auxiliary Converter by dipping them up to a height equivalent to 650 mm from rail level (under fully wheel worn condition) in stationary water for 12 hours. There should be no water ingress and Converters shall function normal after the test. Traction Motor with gearbox shall be tested for waterproofing as defined in clause 3.4.6.10.1 of specification ICF MD SPEC-398, issue status-01, rev 01. Other underslung equipment shall have IP protection as mentioned in clause 3.3. However, even in case of flood levels more than the mentioned above, the equipment shall not get damaged and it should be possible to rejuvenate the equipment with minor attention without any adverse effect on their performance. Axle box shall be adequately flood proof.</p>

3.6 STANDARDS

- (a) The standards applicable and relevant to the complete Train and to the various Sub-systems and systems shall be:
- (i) IEC publications;
 - (ii) EN;
 - (iii) UIC;
 - (iv) AAR;
 - (v) IEEE;
 - (vi) BS;
 - (vii) RDSO specifications;
 - (viii) ICF/RCF specifications;
 - (ix) NF-F;
 - (x) ORE;
 - (xi) VDE;

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

- (xii) UL;
- (xiii) JIS
- (xiv) IS; and
- (xv) Any other standards referred to in this Schedule.

(b) In the event of any contradiction in the aforesaid standards, the following standards shall have priority in the order listed:

- (i) Standards mentioned in these Specifications and Standards set forth herein;
- (ii) EN/IEC/UIC/AAR and
- (iii) IS.


(c) For avoidance of any doubt, in case of any conflict between the requirements of these standards, the stipulations of Specifications and Standards in this Schedule shall have precedence.

(d) The temperature rise shall be measured according to the procedure stipulated by IEC and shall comply with the limits specified and the ambient conditions defined in the Specification. Specified temperature rise of equipment shall be calculated after taking into account at least 25% choking of air filters and radiator fins etc.

3.7 ENGINEERING DATA

- (a) The contactor shall necessarily submit all the drawings/ documents unless anything is waived. The contactor shall submit drawings/ design documents/ data/ test reports as may be required for the approval of the purchaser. All drawings submitted by the Manufacturer including those submitted at the time of bid shall be in sufficient detail to indicate the type, size, arrangement, material description, Bill of Materials, weight of each component, break-up for packing and shipment, the external connections, fixing arrangement required, dimensions required for installation and interconnections with other equipment and materials, clearances and spaces required for installation and interconnections between various portions of equipment and any other information specifically requested in the specifications.
- (b) Each drawing submitted by the Manufacturer shall be clearly marked with the name of the Customer and Project, the unit designation, the specifications title, the specification number, date of revision (if any), duly signed by the concerned technical person. If standard catalogue pages are submitted, the applicable items shall be indicated therein and should be made project specific. All titles, noting, markings and writings on the drawing shall be in English. All the dimensions should be in metric units.
- (c) The title block of drawings shall contain the following information incorporated in all contract drawings

1. Customer : BHEL /Indian Railways
--

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

2. Project: Manufacturing cum Maintenance of Vande Bharat Trainsets
3.Contract No./LOA No./ Ref no.: 2022/RS(WTA)-527/Vande Bharat Trains/874/1 dated 14/06/23
4. Main Contractor : Bharat Heavy Electricals Limited

3.7.1 SIZE OF DRAWINGS

The drawings of the following parts shall be to the sizes indicated below

- I. Equipment details – full size or half size
- II. Motor Assemblies – 1:5
- III. General Assemblies- 1:10

Further, the scaling of drawings should be as per applicable standards.

3.7.2 METHOD OF FILING OF DRAWINGS

To facilitate filing of drawings, it is essential that each drawing submitted for approval is marked so that it can be identified. The supplier is, therefore, required to ensure that all prints are marked legibly at the right hand bottom corner. The following information is required in respect of each drawing:


- I. Supplier's drawing number.
- II. Supplier's name and date of submission.
- III. Contract no. given by the purchaser.
- IV. Description of drawings.
- V. Relevant Specifications

3.8 MARKING OF EQUIPMENT & RATING PLATE

- (a) All main assemblies of the equipment shall bear serial number, year of manufacture and symbol/ identification of the purchaser. Where the sub- assemblies/components of the main assemblies are not inter-changeable, the sub-assemblies shall also be marked with the serial nos. of the main assembly of which they form a part.
- (b) All equipment/cubicles shall contain non-detachable rating plates of anodized aluminium with embossed letters and fitted in a visible position. The rating plate will give detailed rating specification and identification of equipment.

3.9 INFRINGEMENT OF PATENT RIGHTS

BHEL and Indian Railway shall not be responsible for infringement of patent rights arising due to similarity in design, manufacturing process, components used in design, development and manufacturing of propulsion system & other equipment and any other

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

factor which may be a cause such dispute. The responsibility to settle any issue lies with the manufacturer.

3.10 DOCUMENT SUBMISSIONS

The scheduled dates for the submission of these as well as for, any data/information to be furnished by the Purchaser would be discussed and finalized at the time of award. The following schedule shall be followed generally for approval:


Sl.no.	No. of copies	Schedule
i)	Initial Submission Drawings, Data sheets, Type test Reports	At the time of submission of offer.
ii)	Furnishing of drawings in hard / soft copy format	Approx 2 to 3 weeks from the date of award of contract.
iii)	Furnishing of type test reports in hard / soft copy format	Hard / soft copy to be submitted immediately after the completion of the test.
iv)	Furnishing of routine test reports	Hard / soft copy to be submitted immediately after the completion of the test.
v)	All documents including Installation, Operation & Maintenance manuals.	Approx 2 to 3 weeks from the date of award of contract.

3.11 QUALITY ASSURANCE PROGRAMME

(a) To ensure that the equipment and services under the scope of this Contract, whether manufactured or performed within the Manufacturer's Works or at his Sub-manufacturer's premises or at the Purchaser's site or at any other place of Work, are in accordance with the specifications, the Manufacturer shall adopt a suitable quality assurance program to control such activities at all points, as necessary. Such program shall be outlined by the Manufacturer and shall be finally accepted by the Purchaser

(b) A quality assurance program of the manufacturer shall generally cover the following:

- I. Manufacturer's organization structure for the management and implementation of the proposed quality assurance program:
- II. Documentation control system;
- III. Qualification data of bidder's key personnel;
- IV. The procedure for purchases of materials, parts components and selection of sub-Manufacturer's services including vendor analysis, source inspection, incoming raw material inspection, verification of material purchases etc.

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

- V. System for shop manufacturing and site erection controls including process controls and fabrication and assembly control;
- VI. Control of non-conforming items and system for corrective actions;
- VII. Inspection and test procedure both for manufacture and field activities;
- VIII. Control of calibration and testing of measuring instruments and field activities;
- IX. System for indication and appraisal of inspection status;
- X. System for quality audits;
- XI. System for authorizing release of manufactured product to the Purchaser
- XII. System for maintenance of records;
- XIII. System for handling storage and delivery; and
- XIV. A quality plan detailing out the specific quality control measures and Procedures adopted for controlling the quality characteristics relevant to each item of equipment furnished and/or services rendered.


(c) The Purchaser or his duly authorized representative reserves the right to carry out quality audit and quality surveillance of the system and procedure of the Manufacturer/his vendor's quality management and control activities.

3.12 QUALITY ASSURANCE DOCUMENTS


The Manufacturer shall be required to submit the Quality Assurance Documents as stipulated in the quality plan at the time of purchaser's inspection of equipment/material.

3.13 TYPE AND ROUTINE TESTING & INSPECTION

1. The individual prototype equipment, systems and sub- systems shall be type and routine tested in accordance with the relevant IEC/ UIC/ EN publications.
2. All type tests mentioned in clause 2.6 shall be conducted by Supplier or such other agency or person agreed by RDSO / Nominated Agency at the Supplier's cost where ever performed in presence of and to the satisfaction of RDSO/ Nominated Agency, who reserves the right to witness any or all of the tests. All tests set forth in this specification shall be conducted by the Supplier or other agency or competent person as agreed by the purchaser/ RDSO/ Nominated Agency.
3. RDSO / Nominated Agency may waive some of these tests in case of equipment/ sub-assemblies where the manufacturer can establish to the satisfaction of RDSO that such tests have already been carried out earlier. In such a case, manufacturer shall submit complete test reports along with necessary certification.

	<p align="center">TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)</p> <p>DOC. No.: PS4452979, PART-A, REV No. 01</p>	<p align="center">PROJECT- ICF Trainsets</p>
--	---	---

4. Wherever any equipment, system, sub system is not specifically covered by an international recognized specification or test procedure, the tests which are acceptable to both to Supplier and to the IR's representative shall be devised.
5. Without prejudice to any provisions of the contract, the purchaser reserves the right to witness any or all of the type tests mentioned in clause 2.6 and to require submission of any or all test specification and reports.
6. The price of conducting all tests and additional type tests is deemed to be included in Bid price. In case any bidder indicates that he shall not carry out a particular test, his offer shall be considered incomplete and shall be liable to be rejected.
7. The Purchaser, his duly authorized representative and/or outside inspection agency acting on behalf of the Purchaser shall have at all reasonable times free access to the Contractors premises or Works and shall have the power, at all reasonable times to inspect and examine the materials and workmanship of the works during its manufacture or erection if part of the Works is being manufactured or assembled at other premises or works, the Manufacturer shall obtain for the Engineer and for his duly authorized representative permission to inspect as if the works were manufactured or assembled on the Manufacturer's own premises or works. Inspection may be made at any stage of manufacture, dispatch or at site as the option of the Purchaser and the equipment if found unsatisfactory due to bad workmanship or quality, material is liable to be rejected.
8. Supplier to depute qualified person for supervision of installation and commissioning of the equipment in the prototype rake. During the prototype tests/trials of train, if a technical problem arises with the equipment, qualified supplier representative should be deputed to attend the same.
9. In all cases where the Contract provides for tests whether at the premises or at the works of the Manufacturer or of any Sub-Contractor, the Manufacturer except where otherwise specified, shall provide free of charge items such as labor, materials, electricity, fuel, water, stores, apparatus and instruments as may be reasonably demanded by the Purchaser /Inspector or his authorized representative to carry out effectively such tests of the equipment in accordance with the Contract and shall give facilities to the Purchaser Inspector or to his authorized representative to accomplish testing.
10. The inspection by Purchaser and issue of Inspection Certificate thereon shall in no way limit the liabilities and responsibilities of the Manufacturer in respect of the agreed quality assurance program forming a part of the Contract.

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	


11. The Purchaser reserves the right for getting any field tests not specified in respective sections of the technical specification conducted on the completely assembled equipment at site.
12. During the prototype tests/trials or service of train, if any problems arise or feedback information is obtained, which warrants a re-check of the design/manufacture/quality of the equipment and components, action will be taken as may be necessary by the Supplier to carry out the required investigations and to incorporate the improvements considered most appropriate to reach compliance with the specification without any extra costs to the Purchaser and in a manner approved by the RDSO/ Nominated Agency on equipment/ components already supplied as well as those to be supplied later.
13. The prototype rakes fitted with the supplied equipment, shall be subjected to pre-revenue service trials. Service trials are intended to prove the satisfactory running performance of the supplied Train set equipment and evaluate their reliability in service, ease of maintenance and operations. The performance of the equipment shall be assessed based on the experience gained during the service trials. Necessary modification as required and also as desired by the RDSO/ Nominated Agency / Indian Railway shall be implemented in the series production without any extra costs to the Purchaser.
14. Before carrying out any modification, as found necessary on the basis of tests and trials, the drawings and execution plan shall be got approved from the RDSO.
15. **Type tests on electronic equipment and control electronics**
The electronic equipment and Control Electronics shall be tested as per IEC 60571/EN50155, IEC 60068, EN 50121, IEC 60721-2-5 and IEC 61373 including both compulsory and optional tests. Dry heat test, as specified in IEC 60571, shall be conducted for testing power and control electronic equipment at 80 degrees Celsius. LCD display units shall be tested at 70°C.

3.14 MATERIALS AND WORKMANSHIP

Equipment materials and components shall be new, of high grade and good quality and be to the latest engineering practice. The material and workmanship throughout shall be in accordance with the purpose for which they are intended. Each component shall be designed to be consistent with its duty.

3.15 PACKING, STORAGE AND HANDLING INSTRUCTIONS

All the equipment shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at site till the time of erection. The manufacturer shall also submit packing details/ associated drawing for any equipment/ material before equipment dispatch.


	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

All coated surfaces shall be protected against abrasions, impact, discoloration and any other damages. All exposed threaded portions shall be suitably protected with either a metallic or a non-metallic protecting device.

Storage requirements shall be clearly defined by the supplier. Packing shall be such that if required, long time storage at site should not deteriorate the performance of the equipment.

3.16 FIRE PREVENTION

- i) The design of equipment shall incorporate all measures to prevent fire, and will be such that should any fire take place, the effects shall be minimized and no spread of fire should take place. Materials that are not fire retardant shall not be used.
- ii) Materials used in the manufacture of equipment shall be selected to reduce the heat load, rate of heat release, propensity to ignite, rate of flame spread, smoke emission and toxicity of combustion gases.
- iii) The fire protection on Train shall be designed and constructed in accordance with EN 45545. The applicable Hazard level will be HL3.
- iv) Contractor shall furnish the relevant data, fire load calculations, certifications etc. of the items considered in fire load calculations separately for Above & Below the floor level. The calculations and validation shall conform to the standard adopted by the contractor for fire strategy.
- v) Relevant provisions stipulated in Central Electricity Authority (Measures related to Safety and Electric Supply) Regulations, 2010, shall be followed in the interest of safety of passenger/staff as well as for equipment / instruments provided in the coaches.

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

SECTION – 4

RELIABILITY, AVAILABILITY, MAINTAINABILITY AND SAFETY (RAMS)

4.1 KEY PERFORMANCE INDICATORS

Performance indicators comprises of Availability, Reliability and upkeep of Cars. The bidder must ensure RAMS parameters for the offered equipment and its sub-assemblies supplied to at least maintain the overall fleet availability and reliability targets given below. In case, fleet reliability drops on account of poor reliability of subassemblies supplied, the supplier will be required to improve the quality of subassemblies to match the availability & reliability targets.

a) Availability

Sum of Available Hours as a proportion of the total hours (Available Hours + Non-Available Hours) in the Fleet in any Accounting Year, shall be considered as “Availability”. Guaranteed Availability in every Accounting Year shall be at least 95%.

b) Reliability

Average Mean distance travelled between two Failures for the fleet in any Accounting Year shall be considered as “Reliability”. Guaranteed Reliability shall not be less than 200,000 km.

c) Upkeep


For the offered equipment, there shall be no such conditions during the operation of trains that affects the reliability, safety and passenger amenities. Any maintenance shall be conterminous with the train maintenance schedules as given in CI 4.5 of this section.

List of Conditions affecting Upkeep (As applicable) is enclosed as Annexure-A of this section.

4.2 RELIABILITY AVAILABILITY MAINTAINABILITY AND SAFETY (RAMS)

a) The supplier shall ensure that, Guaranteed Reliability, Guaranteed Availability and High Degree of Safety in order to provide a dependable service, forms an integral element of the offered products.

b) The plan for Reliability, Availability, Maintainability and Safety shall conform to EN 50126/ IEC 61709/ IEC 62278. Reliability of electronic components shall conform to IEC 61709.

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

c) The supplier shall develop and provide RAMS targets (MTBF/MDBF/MTBSF) for the offered equipment both for the complete system and for the major Sub-systems at ambient temperature up to 50°C.

d) After rectification of any failure / fault, the concerned equipment / system should resume its original performance / function.

e) Components critical for safety shall fall into safe operating mode in case of malfunctioning. The system safety plan shall identify and list safety critical components and this list shall be updated periodically and intimate to the purchaser.

f) Supplier shall submit the basic maintenance schedules of the proposed equipment. Minimum interval between two maintenance schedules in the depot for the equipment supplied should not be less than 90 days except for activities which can be done outside the base depot (such as cleaning of filters mounted in the under-frame, for which the periodicity shall not be less than 15 days) and 3 years for major works in workshop/major depot. Average running distance of a rake may be considered as 2000 kilometer per day. Please refer CI 4.5 below in respective planning of maintenance schedule for the supplied equipment.

g) All systems, components and structural areas serviced as part of inspection or periodic preventive maintenance shall be conveniently accessible for service and inspection.


4.3 RAMS DOCUMENTATION

Vendor shall agree to submit following documents pertaining to RAMS analysis:

- Functional breakdown + inherent failure analysis
- Mission critical failures Analysis (Fault Tree Analysis)
- FMECA (Failure Mode Effects and Criticality Analysis)
- System/Sub-Systems Hazard Analysis
- Hazard Log + SIL data (if applicable)
- List of critical components
- Preventive Maintenance Analysis
- Corrective Maintenance Analysis

4.4 SERVICE LIFE OF EQUIPMENT/SYSTEM

Vendor shall specify the service life of the offered equipment / system based on life cycle calculations after which the equipment / system shall call for complete replacement to maintain the required reliability & availability of fleet.

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

Annexure-A

List of Conditions affecting Upkeep of Trains.

S.No.	System name	Condition
1	Windscreen Wiper and Washer System	- Rainy weather, defective wiper in any cab.
2	Couplers (any type)	- Any mechanical/electrical/pneumatic fault and/or any dimensional misalignment and/or any damage to any part which does not allow the coupler to guarantee the fulfilment to its assigned mission, in accordance to the technical requirements, performance and safety set out in this specification.
3	Suspension	- Any defect in primary / secondary suspension resulting in passenger safety, comfort or performance.
4	Wheel	- If wheel flat is > 40 mm or as finalised in design. - Any abnormal hammering as reported by the TO.
5	Pantograph	- Isolation of any pantograph
6	Transformer	- Isolation of any one main transformer.
7	Battery charger	- Battery Charger of one unit isolated.
8	Mechanical drive system	- Any defect resulting in high temperature / isolation
9	Traction Motors	- Isolation of more than 25%motors.
10	Traction converters	- As per the consequential effect as defined in Item 10 above.
11	Main compressor unit	- Isolation of any Main Compressor Unit
12	Auxiliary converter-inverter	- Isolation of any Auxiliary Converter-Inverter unit.
13	Brake system (mechanical)	- If isolation of an additional bogie (mechanical) leads to speed restriction.
14	Exterior lights	- Failure of any head light / marker/tail light.
15	Driver's desk	- If master controller prevents the train from moving. - Any defect in master controller even if no delays are reported. - Any defective cab switch leading to unsafe operation.



**TECHNICAL SPECIFICATION FOR
Current Return Unit (CRU) & Earth Return
Current Unit (ERCU)**

**PROJECT- ICF
Trainsets**


DOC. No.: PS4452979, PART-A, REV No. 01

16	TCMS & Vehicle circuits	<ul style="list-style-type: none"> - If HMI display fails & functionality is not transferred to redundant HMI. - Any failure in TCMS component / equipment /circuit element / software/communication system etc. resulting in loss of intended function. - Further cases will be included based on TCMS redundancy and configuration.
17	PIS & CCTV	<ul style="list-style-type: none"> - If both automatic and manual announcements fail - If announcements in Car is not audible - if ≥ 1 unit exterior side view CCTV not working - If >1 PEA in any car is defective - One saloon CCTV, including its backup if any, is isolated. - If ≥ 1 unit for rear cab and front cab camera, cameras on the roof
18	Passenger doors	<ul style="list-style-type: none"> - If ≥ 1 (one) door per train side is isolated.
19	HVAC (passenger area)	<ul style="list-style-type: none"> - Failure of any one HVAC in any car leading to increase in inside temperature $\geq 28^{\circ}\text{C}$ - Failure of two HVAC's in one car. - Noisy Air Conditioner: Interior Noise $>+2\text{dB}$ than the one recorded and validated during the type test at standstill)
20	Ground fault in DC Circuit	<ul style="list-style-type: none"> - Train to be withdrawn in case of single ground fault if it leads to unsafe operation as per the design.
21	A failure or symptom which may endanger safe and/or normal operation of train	<ul style="list-style-type: none"> - Failure in safety interlock or protection circuit such as door loop - Abnormal noise in underframe - Wheel flat - Arcing in pantograph - Failure of emergency equipment - Failure which may disable train's push out duty. - Train which that requires more than 2 instances of reset within 30 minutes - Jerky movement (The details shall be finalized in design stage). - Others to be decided during design stage

Note: The above list shall be further reviewed and updated during design stage.

4.5 TRAIN MAINTENANCE SCHEDULE (TENTATIVE)

Sl. No.	Schedule	Place of maintenance	Permissible time per schedule	Periodicity
1	Minor maintenance	Light maintenance at Depot	8 hours	3 months
2	AOH	Light maintenance at Depot	7 days	18 months
3	IOH	Heavy maintenance at Depot	10 days	36 months
4	POH	Heavy maintenance at Depot	20 days	72 months

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

SECTION -5

SPARES AND CONSUMABLES FOR MAINTENANCE


5.1 SPARES AND CONSUMABLES

- i) Supplier shall provide complete list of items/materials which get consumed during normal course of operation of the Train as applicable for the equipment/system (the “Consumables”).
- ii) Supplier shall provide complete list of parts or equipment/system ensuring fleet availability of 95% or better, which would be necessary for efficient operation and maintenance of the (the “Spares”).
- iii) Supplier shall provide detailed spare parts catalogue / data-sheet listing all components manufactured or purchased by the supplier along with their rating, source, type / model no., schematic, position, etc.
- iv) Price for above spares and consumables to be shared separately as part of commercial offer.

5.2 SCHEDULED MAINTENANCE

- a) Scheduled (Preventive) maintenance consists of operations to maintain an assembly/subassembly or components in its specific operating conditions by performing:
 - i) periodical inspection and diagnostic tests for prevention of malfunctioning.
 - ii) scheduled replacement of components.
 - iii) checks to be performed at specified time intervals, whose outcome determines whether or not replacements will be required.
 - iv) routine operations, such as filling, topping up, change oil, greasing, adjustments, etc.
 - v) general overhaul of systems and subsystems.
- b) The preventive maintenance schedules required to keep the supplied system in good fettle with requisite reliability and availability would be coterminous with the train maintenance schedules and it should be possible to comfortably complete such maintenance during the time provided for respective train maintenance schedule and in the facility provided (refer Chapter Reliability, Availability, Maintainability and Safety).
- c) Details of Schedule of Periodic / preventive maintenance (the “Scheduled maintenance”) shall be submitted in following sample format:

Nature of inspection / maintenance	Periodicity / Interval	Items to be replaced

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

--	--	--

- d) Scheduled Maintenance shall ordinarily not be required before a travel of 40,000 km (forty thousand kilometres).
- e) Supplier shall provide plan / activities for periodical inspection and diagnostic test for prevention of malfunctioning
- f) List of facilities including tools & tackles required for carrying out all scheduled maintenance activities to be provided by vendor.
- g) All systems, components and structural areas serviced as part of inspection or periodic preventive maintenance shall be conveniently accessible for service and inspection.

5.3 UNSCHEDULED MAINTENANCE

Unscheduled (Corrective) maintenance consists of maintenance operation which is not scheduled (part of preventive maintenance) as a result of an in-service failure.

The supplier shall be required to provide repair & maintenance instructions to put back the equipment / system back in service.

List of facilities including tools & tackles required for carrying out all unscheduled maintenance activities to be provided by vendor.


5.4 EPIDEMIC DEFECT WARRANTY

(a) If any identical defect or deficiency affecting Safety, Reliability and Availability of the trains on more than 20% (twenty per cent) of equipment or parts in any rolling period of 36 (thirty-six) months commencing from the second Year of the Supply Period, such defect or deficiency shall be deemed to be an epidemic defect (the "Epidemic Defect") and the supplier shall cover such Epidemic Defect under an epidemic defect warranty.


(b) In case, the Government (Railways) notifies an Epidemic Defect on account of the supplied assembly, the supplier shall remedy such Epidemic Defect on all such Trains where equipment or parts of that particular design or lot are provided, subject to limitation of period elapsed since commissioning as mentioned above in this para.

5.5 OPERATION AND MAINTENANCE MANUAL

- i) Supplier shall provide an operation manual (the "Operation Manual") for the offered equipment / system in soft copy format in English and Hindi language. The Operation Manual shall include (but not limited to):
 - a) Instructions for troubleshooting;
 - b) Rating and layout of equipment;
 - c) Operating limits of installed systems;
 - d) Control and safety features of the Equipment/System;
 - e) Instructions to Loco Pilots for operation of the Train (if applicable);

	TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)	PROJECT- ICF Trainsets
	DOC. No.: PS4452979, PART-A, REV No. 01	

- f) Do's and don'ts for Loco Pilots (if applicable);
- g) Safety precautions to be taken by the Loco Pilots (if applicable);
- ii) The Maintenance Manual to be provided by supplier shall include:
 - (a) All maintenance activities and their periodicities that are required to keep the Train safe and ensure that the prescribed tolerances of systems and components are not exceeded at any time, including any systems relevant to the maximum moving dimensions;
 - (b) The inspection program for regularly checking that the Train is safe to continuing in service;
 - (c) Assembly & disassembly sequences for the supplies with pictorial playbook guide
 - (d) The engineering facilities (such as pit facilities, special tools etc.) necessary for the mandated maintenance;
 - (e) Minimum competencies required by staff for the maintenance activities.
- iii) The Maintenance Manual shall ensure that safety critical systems and components on the Train are identified specifically and the minimum testing requirements that must be invoked in the event of their disturbance at examination or repair are defined.
- iv) Preparation of the Maintenance Manual shall give consideration to inspections, tests and maintenance of the following that have a bearing on safety:
 - (a) inter-vehicular couplers.
 - (b) fire prevention system including safe working of pantry/ sub pantry equipment.
 - (c) Auxiliary electrical machines: Integrity and security, earthing condition and integrity, condition of safety labelling.
 - (d) Passenger Information System
 - (e) Cleaning: Ventilation ducts, filters, bogies and underframe equipment
 - (f) Power systems (including protection systems): Integrity and security earthing condition and integrity, condition of safety labelling.
 - (g) Pantographs: Integrity and security - dimensions and condition of pantograph head, over-height protection, earthing condition and integrity, condition of safety labelling.
 - (h) Train structures and underframes: Integrity and condition of all load bearing members or panels, integrity, operation and security of doors, openable and removable panels, integrity and security of all body mounted equipment, alignment, gangway.
 - (i) Safety systems (e.g. Vigilance control device): Functional tests;
 - (j) Hydraulic and pneumatic systems: Condition and integrity of hoses, pipework, valves, etc.
 - (k) Fire protection systems: Integrity and condition.
 - (l) Lighting Systems & Visibility: Headlight, flasher and marker lights, adjustment, intensity
 - (m) Speedometers; headlights and marker lights; horn; doors; cattle guard; and bio-vacuum toilets

	<p align="center">TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)</p> <p>DOC. No.: PS4452979, PART-A, REV No. 01</p>	<p align="center">PROJECT- ICF Trainsets</p>
--	---	---

- (v) The instructions within the Maintenance Manuals shall be such as to protect staff working on the Trains, with particular reference to safety precautions and implementing a specified safety condition of the Train prior to starting work.

5.6 OBSOLESCENCE MANAGEMENT

Supplier is required to manage obsolescence of all equipment, spares and consumables to enable the trains to continue in service for 35 years. This obsolescence management service must include:

- i) Timely identification of any obsolete items of equipment;
- ii) Development of mitigation strategies to minimize the impact of the imminent obsolescence of any item within the offered equipment / system including:
 - Establishing alternative supply paths;
 - Provision of equivalent or interchange parts or equipment
 - Development of replacement products or design modifications to accept market available alternatives.




**TECHNICAL SPECIFICATION FOR
Current Return Unit (CRU) & Earth Return
Current Unit (ERCU)**

**PROJECT- ICF
Trainsets**


DOC. No.: PS4452979, PART-A, REV No. 01

Annexure-B

Tentative Picture: Current Return Unit (CRU) & Earth Return Current Unit (ERCU) on Bogie

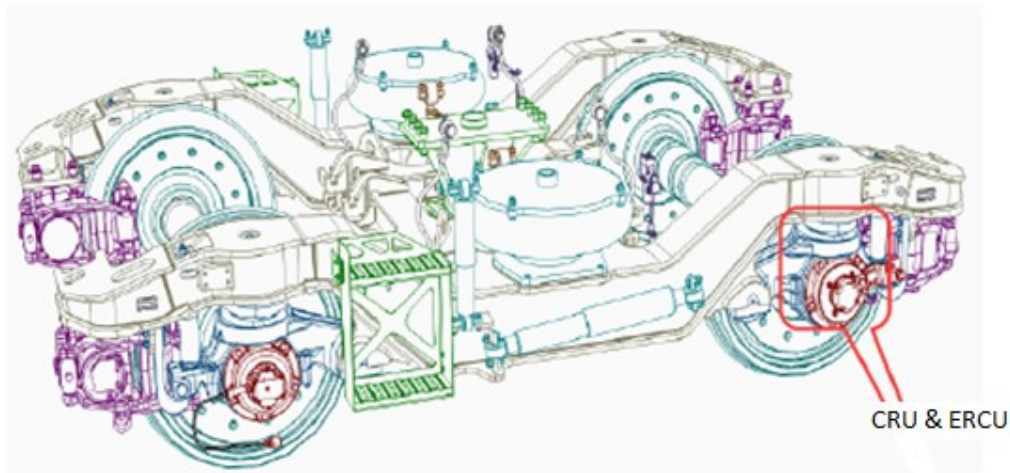

Tentative Picture: Current Return Unit (CRU) & Earth Return Current Unit (ERCU)

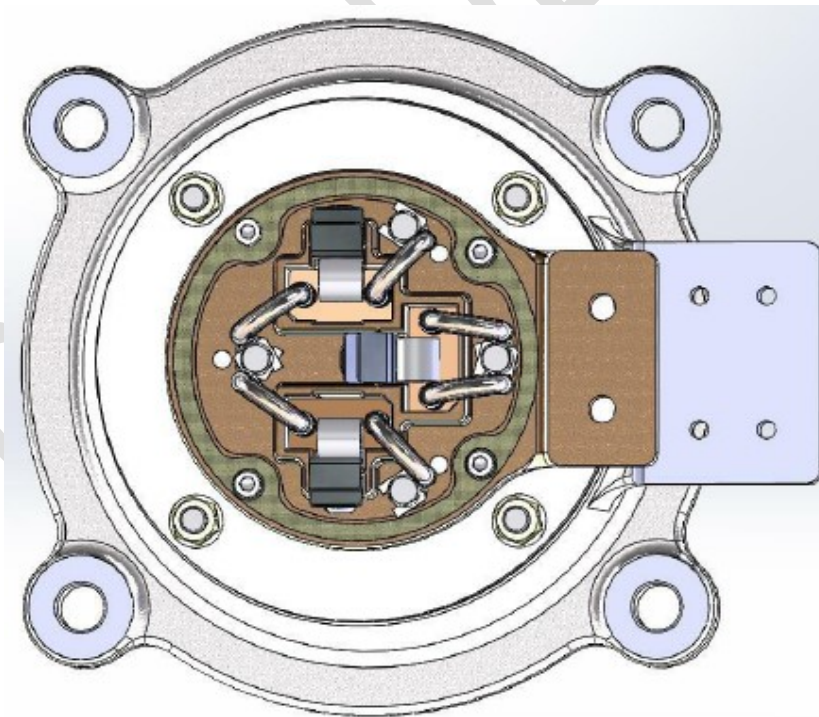





**TECHNICAL SPECIFICATION FOR
Current Return Unit (CRU) & Earth Return
Current Unit (ERCU)**

**PROJECT- ICF
Trainsets**

DOC. No.: PS4452979, PART-A, REV No. 01

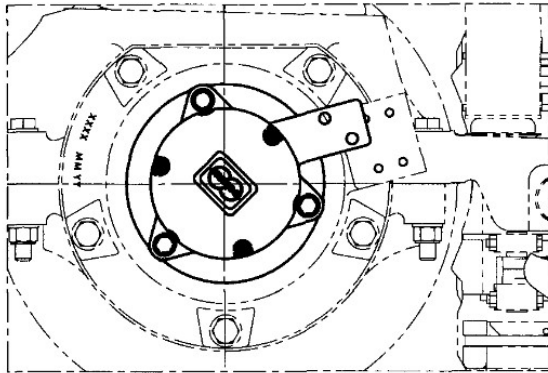


DETAIL A

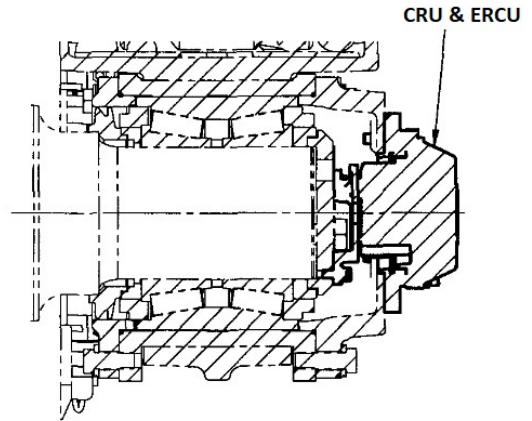

SECTION D-D

CONFIDENTIAL

	<p align="center">TECHNICAL SPECIFICATION FOR Current Return Unit (CRU) & Earth Return Current Unit (ERCU)</p>	<p align="center">PROJECT- ICF Trainsets</p>
<p>DOC. No.: PS4452979, PART-A, REV No. 01</p>		

PERFORMA FOR PERFORMANCE CERTIFICATE

Name of firm:

TO WHOMSOEVER IT MAY CONCERN

Sub : Confirmation letter for service performance

Dear Sir,

We hereby confirm that We have manufactured _____ number of sets of(Name of Equipment with Model No.) for 3 Phase IGBT based EMUs/MEMUs/Metros/trainsets/LOCOs.

We further confirm that number of sets of(Name of Equipment with Model No.) for 3 Phase IGBT based EMUs/ MEMUs/Metros/trainsets/Locos are in satisfactory operation for railway rolling stock application.

Proforma for performance statement confirming above is also attached.

Yours faithfully

For (Name of Firm)

CONFIDENTIAL



**TECHNICAL SPECIFICATION FOR
Current Return Unit (CRU) & Earth Return
Current Unit (ERCU)**

**PROJECT- ICF
Trainsets**

DOC. No.: PS4452979, PART-A, REV No. 01

REVISION HISTORY

Rev No.	Date	Description/Update

CONFIDENTIAL



BHARAT HEAVY ELECTRICALS LIMITED
ELECTRONICS DIVISION
Mysore Road, Bangalore

Doc. No : PS4452979

Rev. No : 01

Page : 1 of 3

**CUSTOMER/
USER**

BHEL/INDIAN RAILWAYS

PROJECT

MANUFACTURING CUM MAINTENANCE OF VANDE
BHARAT TRAINSETS




COPYRIGHT AND CONFIDENTIALITY
The information on this document is the property of
BHARAT HEAVY ELECTRICALS LTD.
It must not be used directly or indirectly in anyway detrimental to the interest
of the company


Purchase Specification

for

Current Return Unit (CRU) and Earth Return Current Unit (ERCU)

Rev No.	Date	Altered	Checked	Approved	Revision Details
--------------------	-------------	----------------	----------------	-----------------	-------------------------

Issued by: Traction Engg. Dept., BHEL-EDN	Approve  S P Singh				
		Prepared  Raj Kumar Pradhan	Checked  David J	Date 09.05.2024	

	Purchase Specification for Current Return Unit (CRU) and Earth Return Current Unit (ERCU)	Project – Vande Bharat – 32 sets
	Doc. No.: PS4452979	Rev. No.001

1.1 Technical Specification

1.1.1 For the technical requirement, bidder to refer to **PS4452979** – Part A, Rev.-01.

2.1 Bill of Quantities

2.1.1 Bill of Materials in the technical specification (Part A) is for information only.

Bidder to consider & quote for the items as per the quantity mentioned in the RFQ


3.1 Packing Instructions

3.1.1 Successful bidder to mandatorily follow the packing instructions given in Part A

3.1.2 Stack-ability of the packaged boxes & storage worthiness/durability to be ensured

3.1.3 Successful bidder shall ensure that set-wise Packing List be pasted on each Box

(Typical format enclosed with this document)

	Purchase Specification for Current Return Unit (CRU) and Earth Return Current Unit (ERCU)	Project – Vande Bharat – 32 sets
	Doc. No.: PS4452979	

Set wise Packing List to be pasted on each Box

Supplier shall furnish the packing list as per the format given below:

BHEL PO No.	
BHEL Material Code	
Material Description	
Quantity (Set)	
Box No (per set)	

Bill of Materials (Supplier shall list down all the items including loose items and respective quantities):

Main Item:

Sl. No.	Item description	Quantity per Set	Total Sets packed in the Box (applicable in case of multiple sets in one Box)

Loose Items (if any):

Sl. No.	Item description	Quantity per Set	Total Sets packed in the Box (applicable in case of multiple sets in one Box)

Supplier details:

Notes for suppliers:

- 1) Suppliers shall pack items, set wise in one box. In case of multiple boxes for one set, supplier shall identify box numbers (Set 1/ Box1, Set 1/ Box2 etc.)
- 2) Packing list shall be pasted on each box, as per actual contents inside the box. This list will be in addition to the supplier's standard packing list.
- 3) Box wise Packing list shall be shared with BHEL MM and same will be mandatory for dispatch clearance.

	Vande Bharat Project
	RAMS TEMPLATES
	CONTENTS
1	Breakdown + Inherent Failure Reliability Prediction
2	Critical failures analysis
3	Failure Mode Effects and Criticality Analysis (FMECA)
4	System/Sub-Systems Hazard Analysis (SHA)
5	Hazard Log + SIL
	Note All table are in accordance to the EN 50126-1-2-3 used as guideline. Refer to above standard for definition and meaning of contents. Minor differences may exist due to application of specific requirement from Railway Administration or final User

Failure Mode Effects and Criticality Analysis (FMECA)

Project:														Document No/Rev:				
System:														System Supplier:		Issue date:		
Sub-System:																		
Drawing no:																		
Position No	Part/LRU Code	Description	P/N	Coach type	Function	Phase	Failure mode		Cause of Failure Mode	Failure rate (FPMH)	Failure effect			Criticality		Failure identification /detection	Preventive and compensating measures	Remarks
							Fail. Mode index	Failure Mode			Local	System	Train	Service	Safety			

System/Sub-Systems Hazard Analysis (SHA)

:	Document No/Rev:
:	Issue date:
stem:	
g no:	

Main System ID	Hazard Category	Hazard description (general)	Hazard Identification (detailed)	Hazard description (detailed)	Sequential Numbering	Phase / Operation mode	System / Sub-System / Component	Causes	Consequence Potential accident/ damage	Severity Level	Probability	Risk Category	Preventive/compensating actions (Design, Maintenance, Operational Safeguards)	Target risk category	Remarks / Documents reference	Comments
Code that univocally identifies the system object of SHA	Numbering for each hazard of the corresponding "hazard type category"	Hazard category in accoding with Hazard List	Numbering for each hazard of the corresponding "hazard type"	Specific description of the generic hazard	Progressive number associated to previous column	- Running / Normal operation - Running / Degraded operation - Running / Multiple operation - Running / Emergency operation - Standstill / Parking - Standstill / Stabling - Standstill /Driver cab change - Depot / Manoeuvre - Depot / Maintenance	System/ subsystem /component from which the hazard originates	Description of the cause that originate the corresponding hazard	Description of the consequences that could occur in case of the corresponding hazard. The subject of the consequences shall be identified.	Severity level category	Estimated Frequency of Hazard	Risk category and acceptance criteria	The preventive and mitigation measures identified in order to reach the Target risk Objective.All the useful Design, Maintenance, Operational safeguards shall be taken into account, and where available, a reference to applicable standards or regulation shall be reported.	Desired risk category and acceptance criteria	Reference to drawings or specification or documents	Any useful comments for a better understanding. For example it shall be highlighted If an hazard needs to be exported to the vehicle builder / train operator

Corrective Maintenance Analysis

Doc. No		Rev No.	00
Date:			
Project	Vande Bharat Project		
Equipment:			
Supplier:			
Compiled by:			

			REMARKS
Manpower cost		Rs/hrs	
Yearly distance run	3,50,000	km	
LCC period	35	Years	
Fleet (nr. of trains)	80	Trains	

Preventive Maintenance Analysis

Doc. No		Rev No.	
Date:			
Project	Vande Bharat Project		
Equipment:			
Supplier:			
Compiled by:			

			REMARKS
Conversion speed		km/hrs	
Manpower cost		Rs/hrs	
Yearly distance run	3,50,000	km	
Running days per year		days	
LCC considered period	35	years	
Basic maintenance frequency		km	
Distance covered in the considered period	1,22,50,000	km	
Train-sets number in the fleet	80	Trains	

