



RUS26126-KS

Linear recirculating roller bearing unit

Linear roller bearings with spacer elements,
with end face lubrication connectors RUS..

Technical information



Your current product variant

Suffix	KS	With end face lubrication connectors
Size code	26126	

Main Dimensions & Performance Data


L _{tot}	138.1 mm	Total length
B	40 mm	Width
H	26 mm	Height
C	122,000 N	Basic dynamic load rating
C ₀	209,000 N	Basic static load rating
≈m	0.81 kg	Weight



View product details on medias

04.09.2026, 16:49:14 IST

SCHAEFFLER

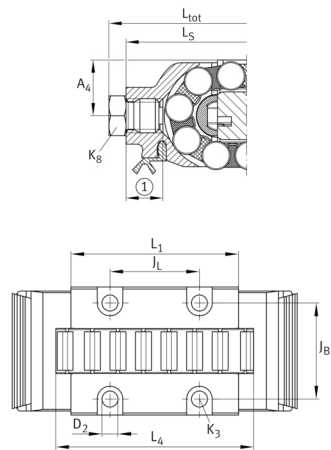

Mounting dimensions

L 1	93 mm	Mounting dimension
J B	30 mm	Mounting dimension
Tol J B	± 0.1 mm	Tolerance
J L	68 mm	
Tol J L	± 0.1 mm	Tolerance
H 1	0.2 mm	
L 4	103 mm	Minimum support length
L W	14 mm	
H 4	21 mm	
T 5	10.2 mm	
G 1	M6	Fixing screws top (DIN ISO 4762-12.9)
G1 M A	17 Nm	Tightening torque fixing screws
K 3	M4	Fixing screws below (DIN ISO 4762-12.9)
K3 M A max	5 Nm	Tightening torque fixing screws
D 2	4.9 mm	
L S	132.1 mm	
A 4	13.2 mm	
	M6	Lubrication connection DIN3405-A
	6 mm	

Related products

VUS26126-A	Adjustment gib
UG9741, UGN9741-A, UZ9741, UZN9741-A, UFK4710, UFB6412	Suitable Guide rail

PRE QUALIFYING CRITERIA

PI NO 830460016

1	Only OEM or authorized agent/dealer/channel partner of the OEM for the items i.e. -BEARINGS FOR MACHINE NO-5A2127 and 5A2142 RUS26126-KS-GR3/-10-15 -MAKE-INA ONLY- LINEAR RECIRCULATING ROLLER BEARING UNIT DESIGNED FOR HEAVY-DUTY LINEAR GUIDANCE SYSTEMS, CNC MACHINE TOOLS, AND PRECISION SLIDING MECHANISMS- QTY=8 NO'S APART FROM OEM, PARTY TO SUBMIT VALID AUTHORISATION CERTIFICATE ISSUED FROM OEM
---	---