

# HEEP

B.H.E.LTD.HARDWAR

STD

PLANT STANDARD

## SEALING STRIPS

0614.941

BASED ON NH 350-57


REVISION

SHEET NO 1

TOTAL SHEETS 1

1 THE PRESENT STANDARD DEALS WITH SEALING STRIPS FOR OIL GAURD RINGS OF TURBINE BEARINGS.

1 A

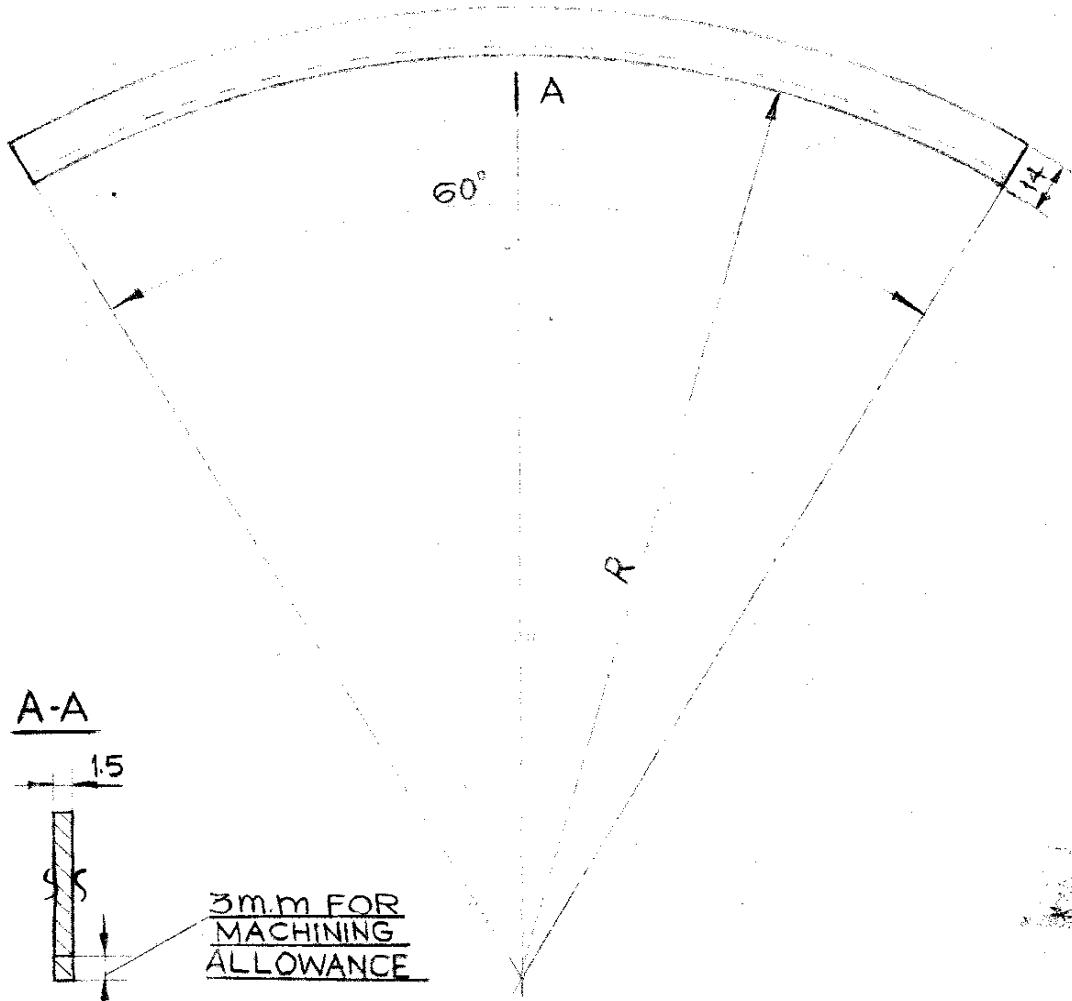

2 IN AN ASSEMBLY/SUB ASSEMBLY DRAWING, AS AN EXAMPLE, FOR A SEALING STRIP OF RADIUS  $R=500$  MM, THE FOLLOWING SHOULD BE WRITTEN:-

IN THE COLUMN DESIGNATION:-

IN THE COLUMN DESCRIPTION:- SEALING STRIP  $R=500$  AS PER

3 MATERIAL:- ~~BS 6316:410-59~~ <sup>①</sup> BRASS CuZn37, 15:410-67. STANDARD-0614.941

4 RADIUS AND WEIGHT OF THE SEALING STRIP ARE GIVEN AND WRITTEN IN THE ASSEMBLY DRAWING AND GROUP SPECIFICATION BY THE DESIGNER FOR EACH INDIVIDUAL STRIP.

5 FOR ELEMENTS OF DIAPHRAGM SEALINGS, SEALING RINGS AND OIL-GAURD RINGS SEE CHMT 100-57

INVENTORY NO SIGN & DATE SIGN & DATE CO-ORDINATING DEPT SUPERSEDED INVENTORY NO SIGN & DATE INVENTORY NO DUPLICATE INVENTORY NO

WORKED BY	P. SINGH								
CHECKED BY									
SUPERVISED	JNKARAM	466	APPROVED	INFORCE FROM	a	1	TS-70-12	RPH-914870	
STD. CONTROL	S.L. NARVA	466			CHG	NOS	DOCU. NO	SIGN	DATE
DRAWN BY	AK. SINGH								