


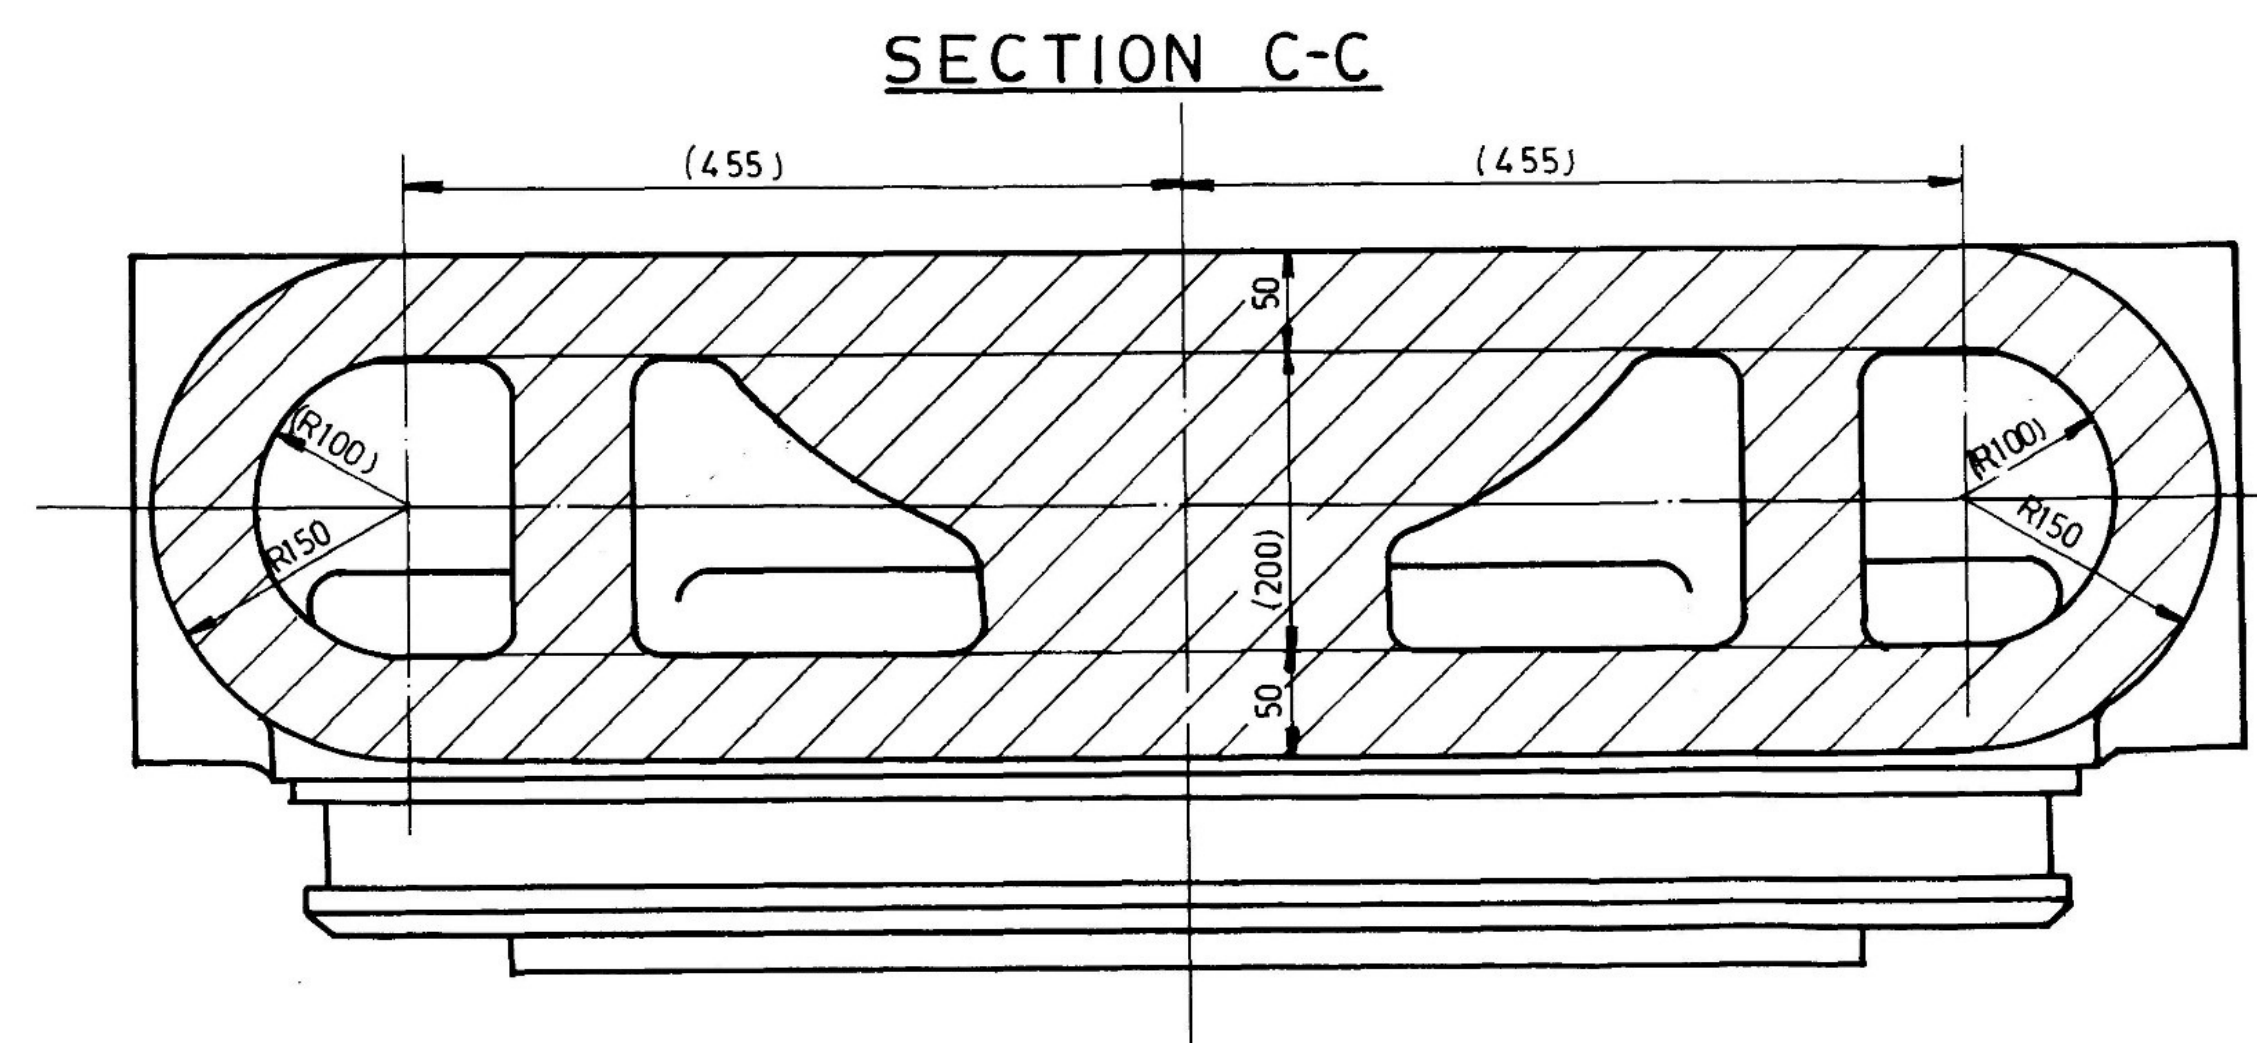
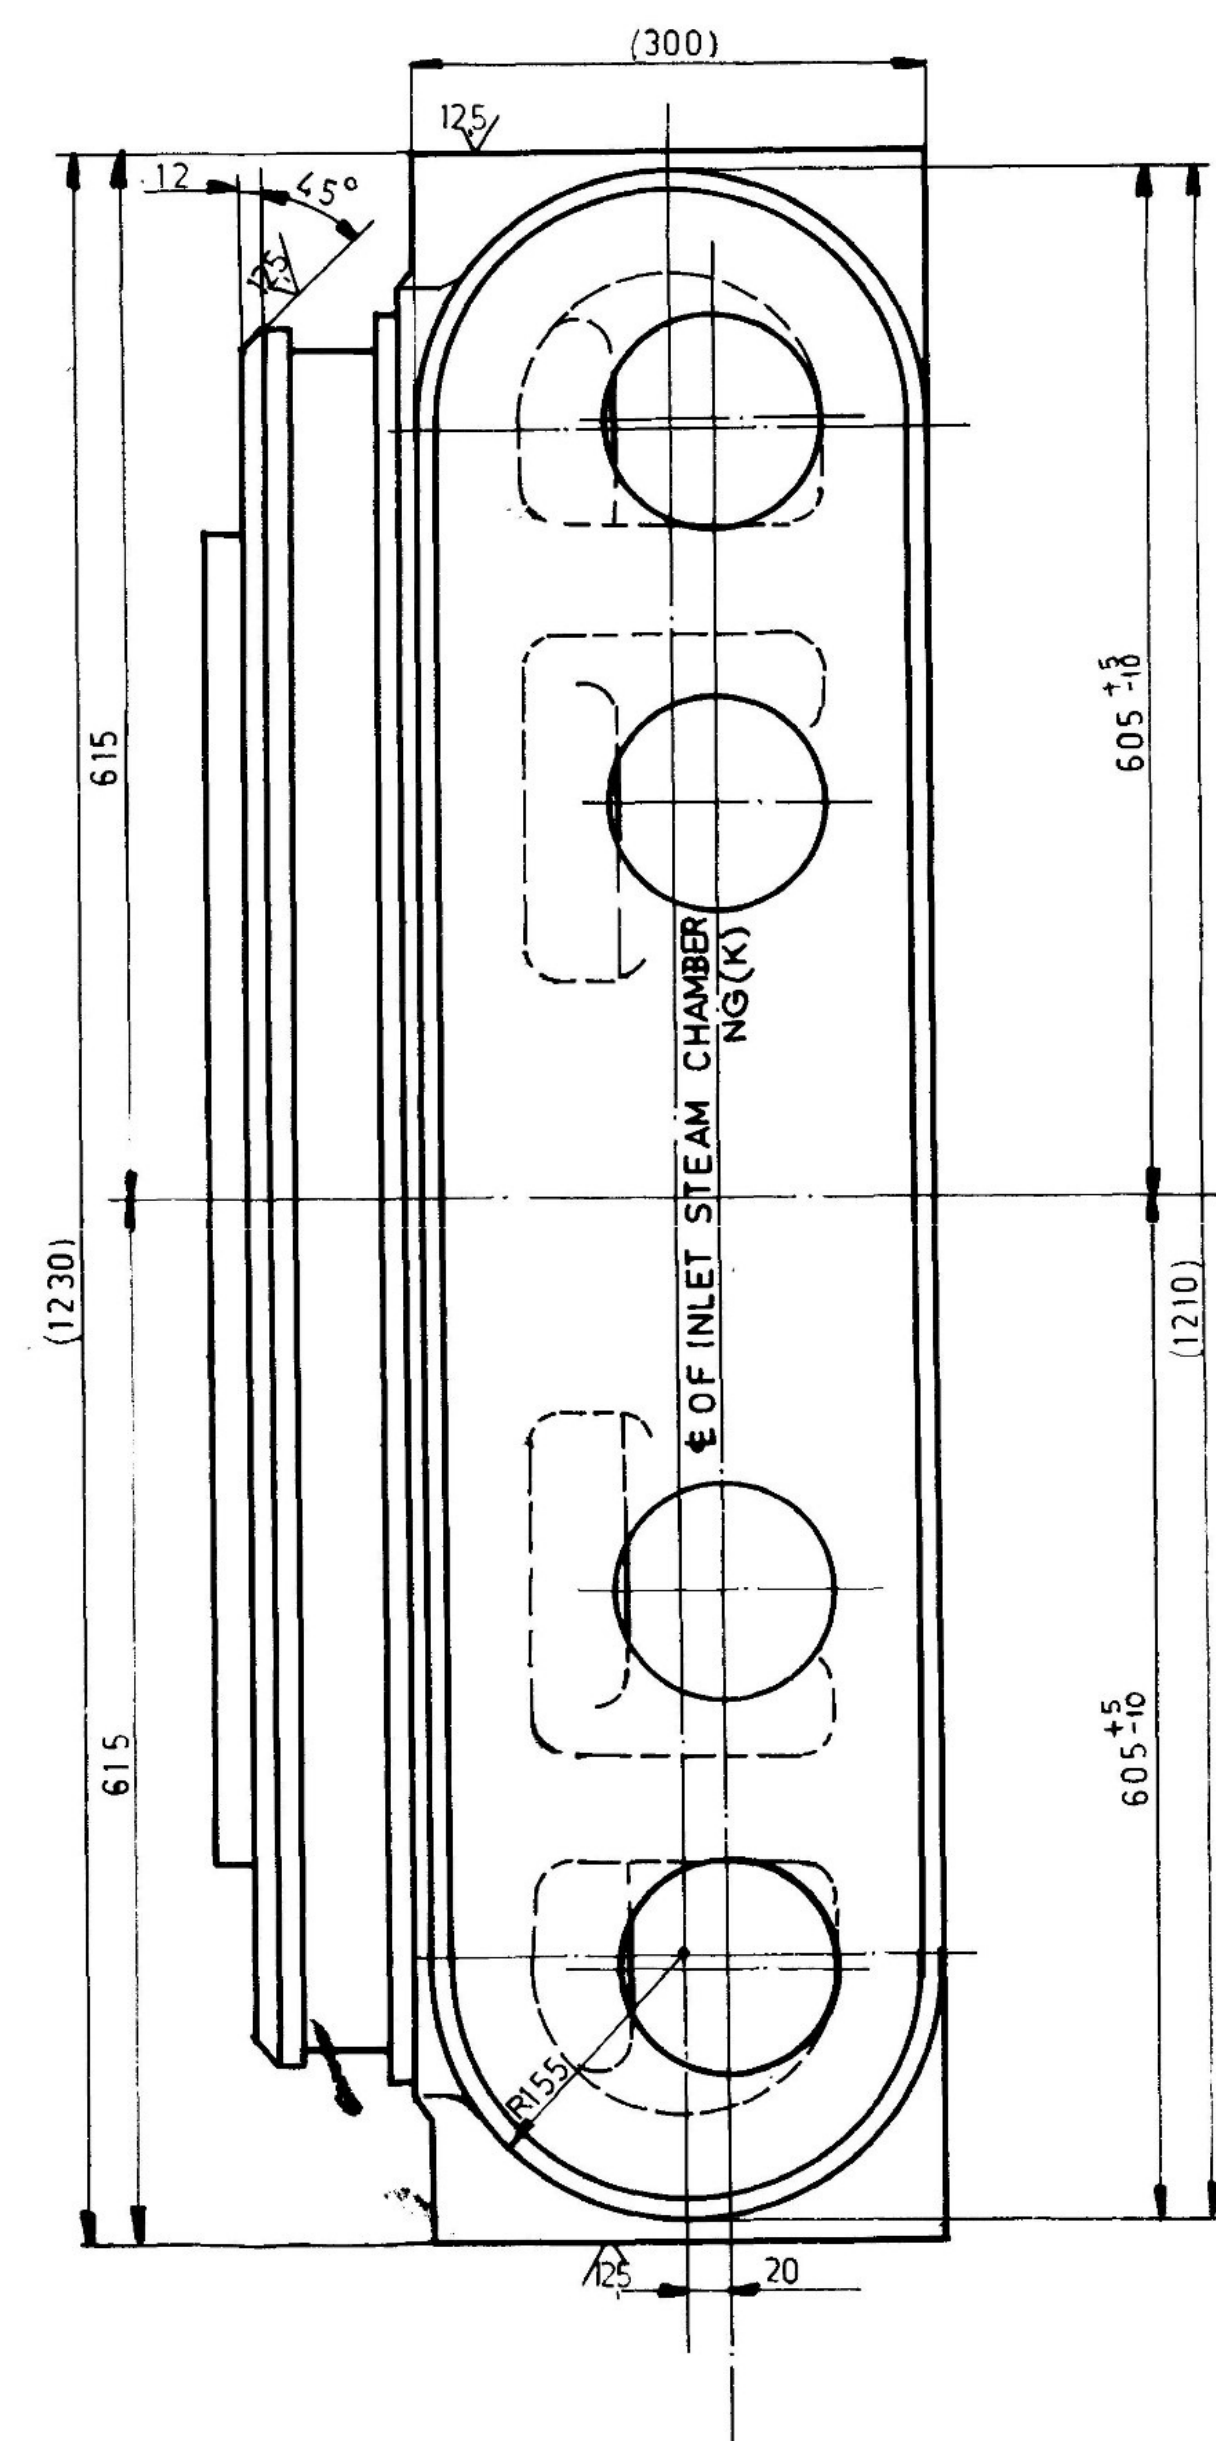
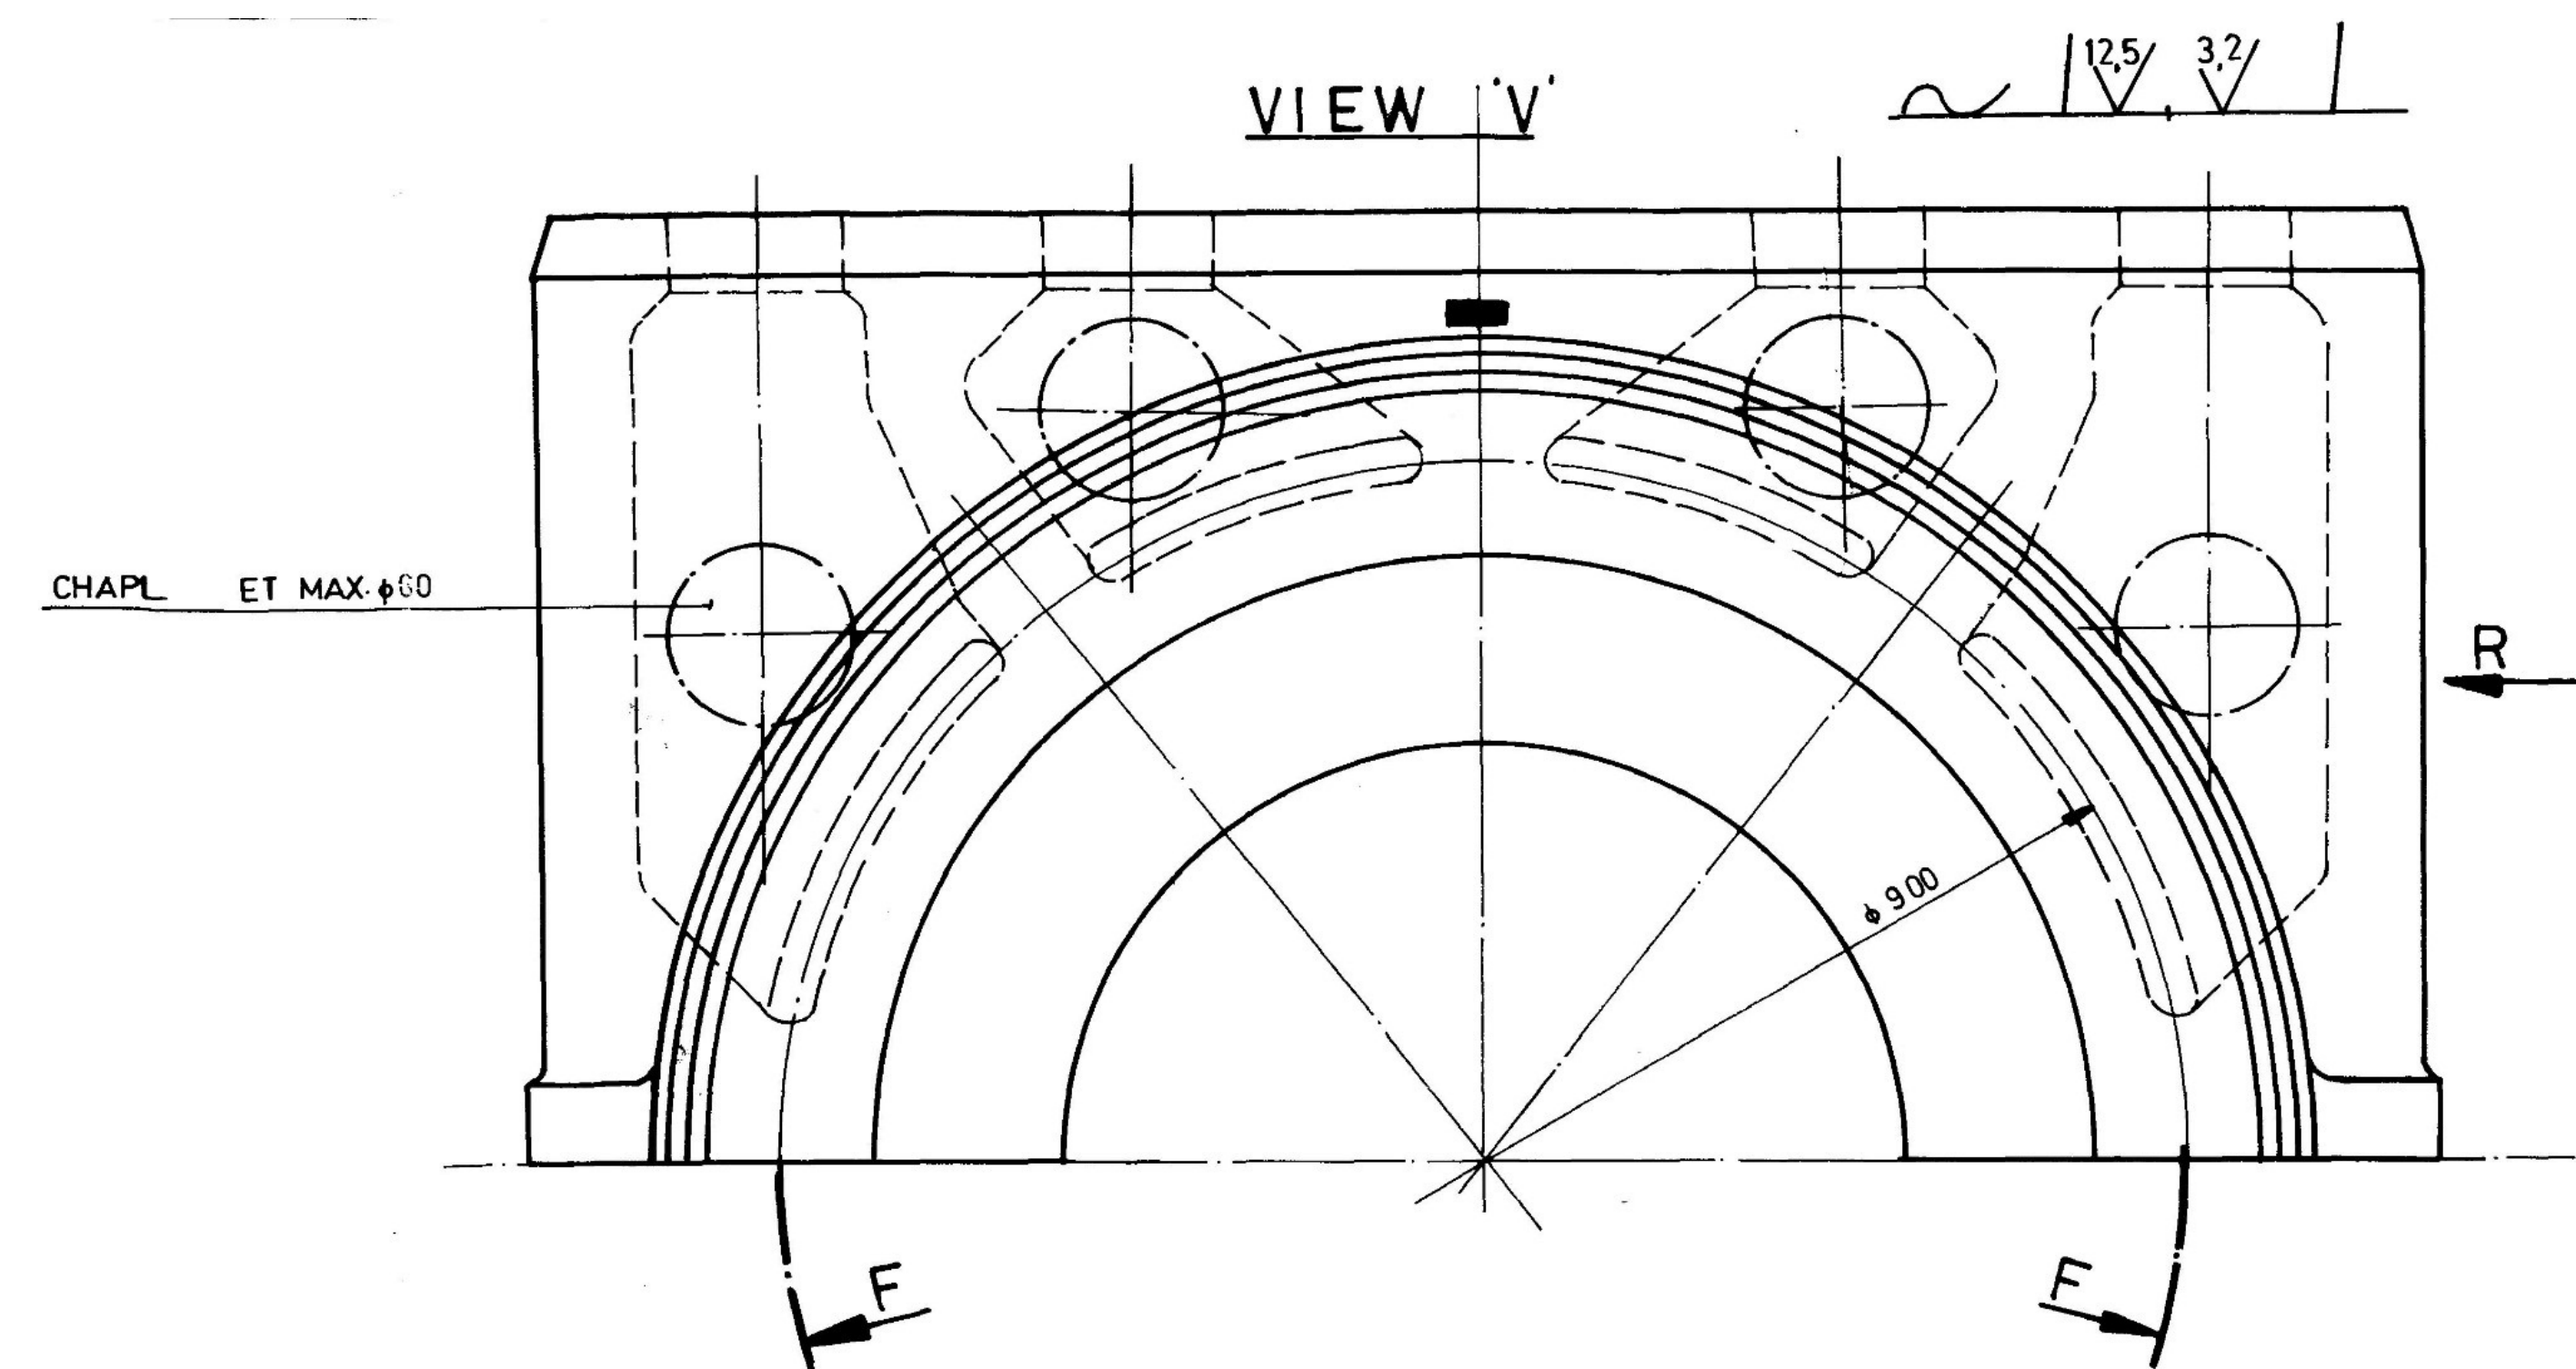
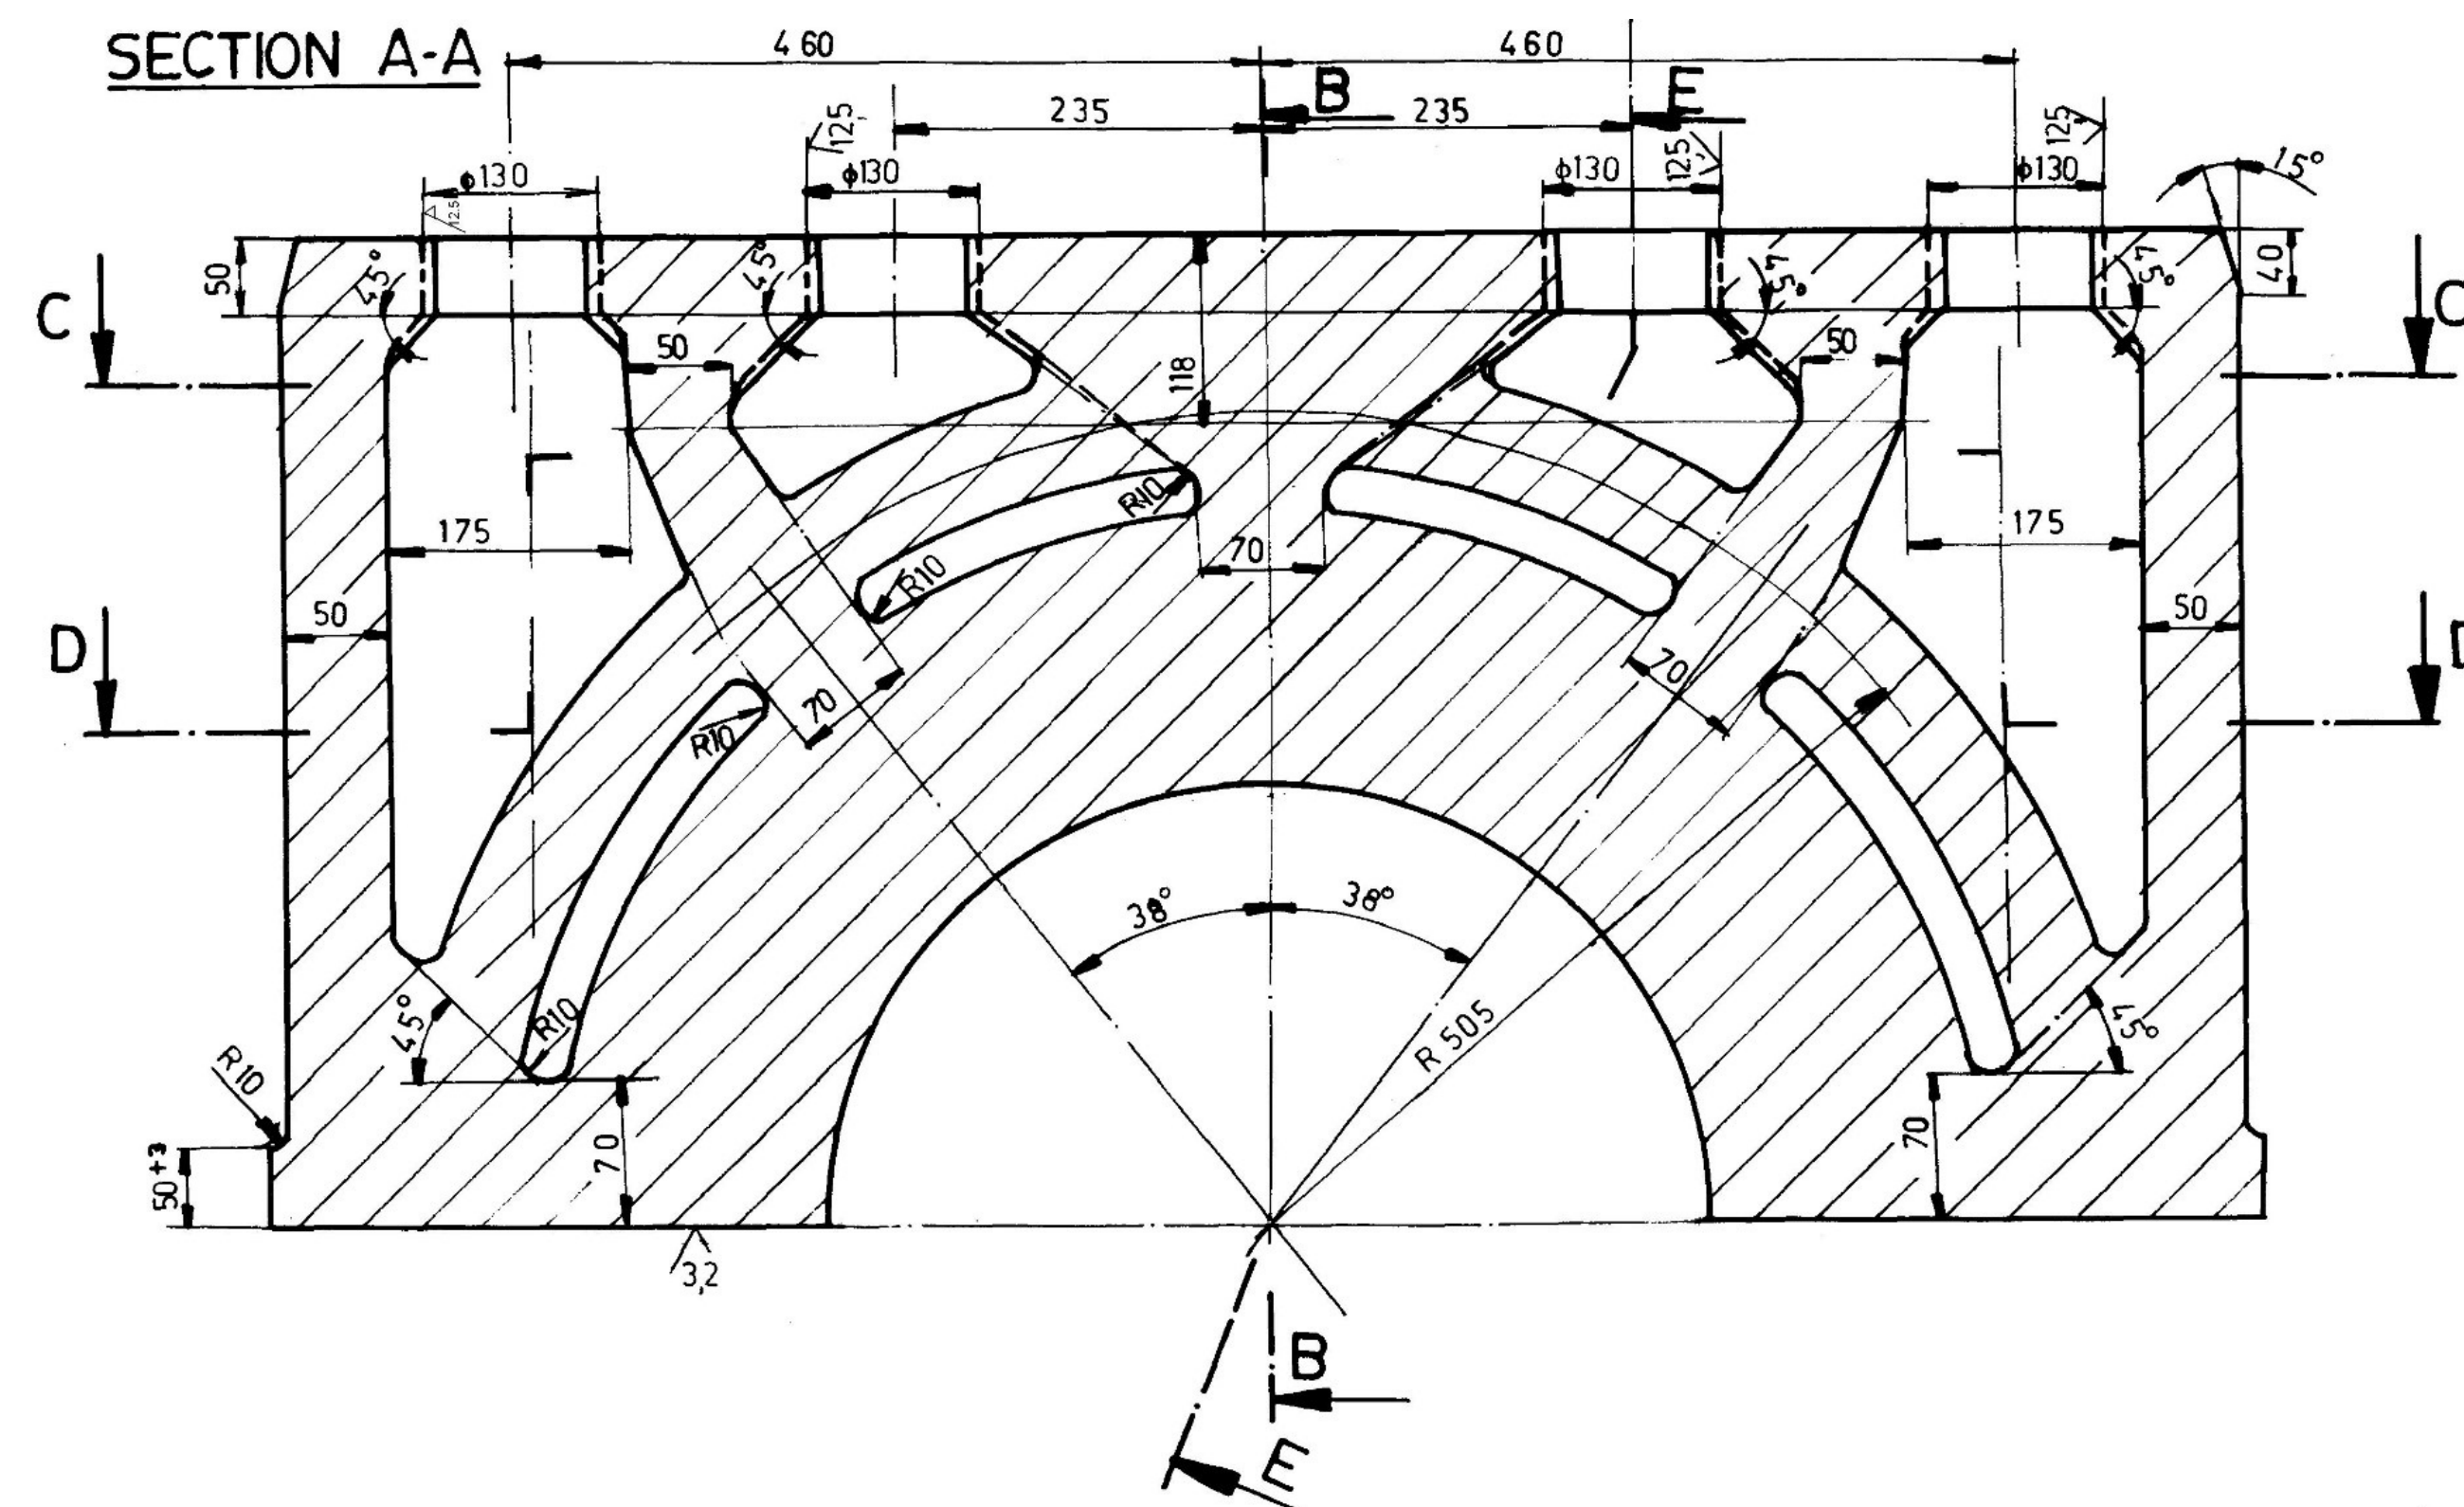
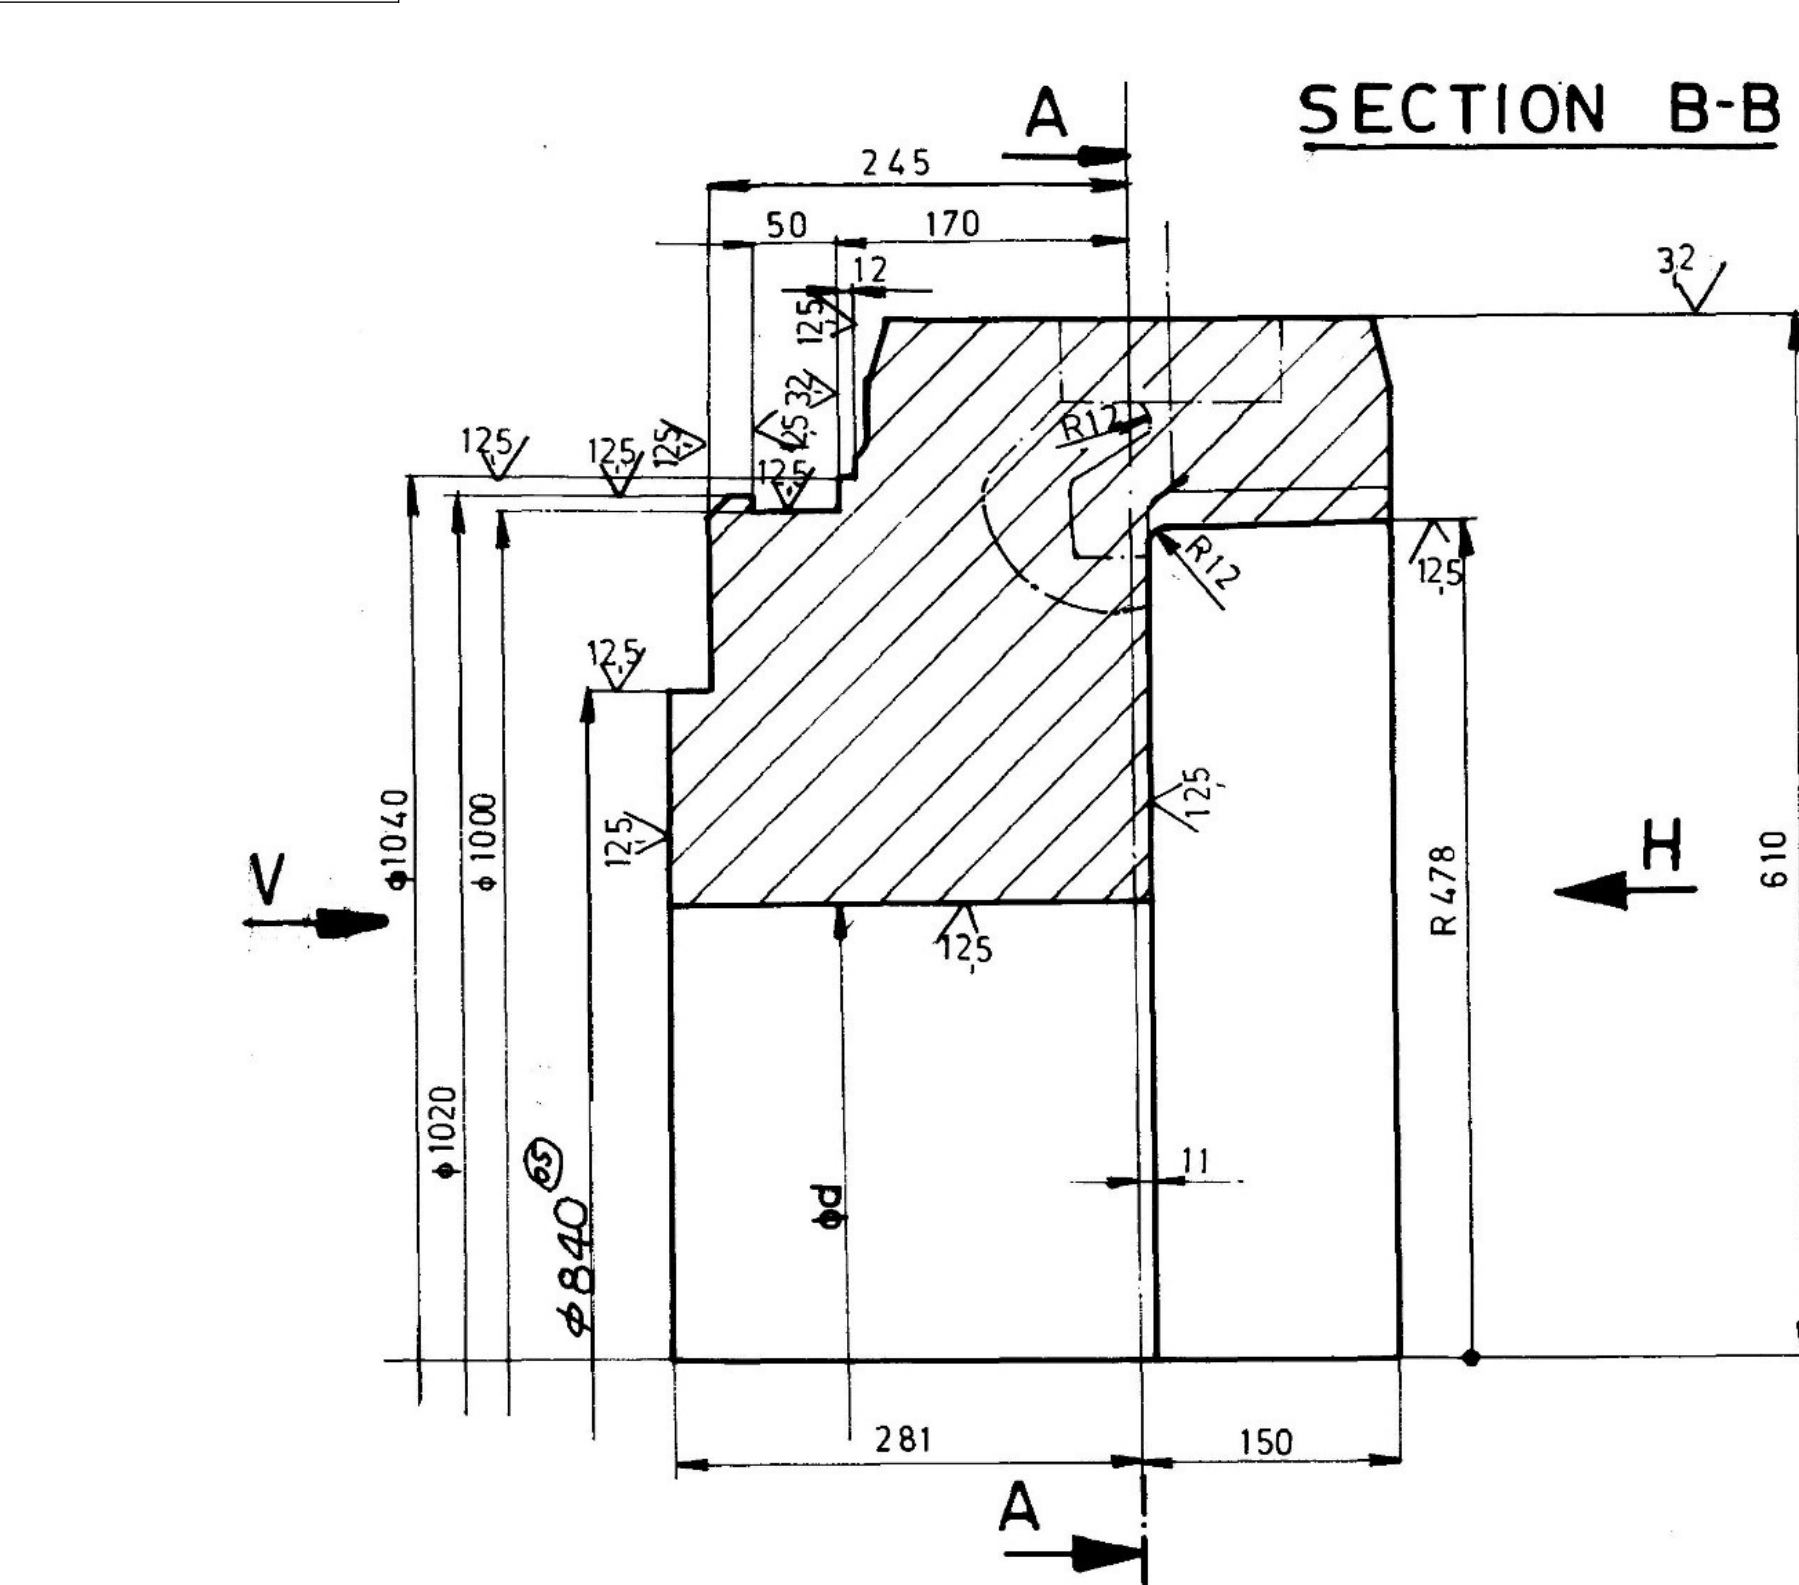


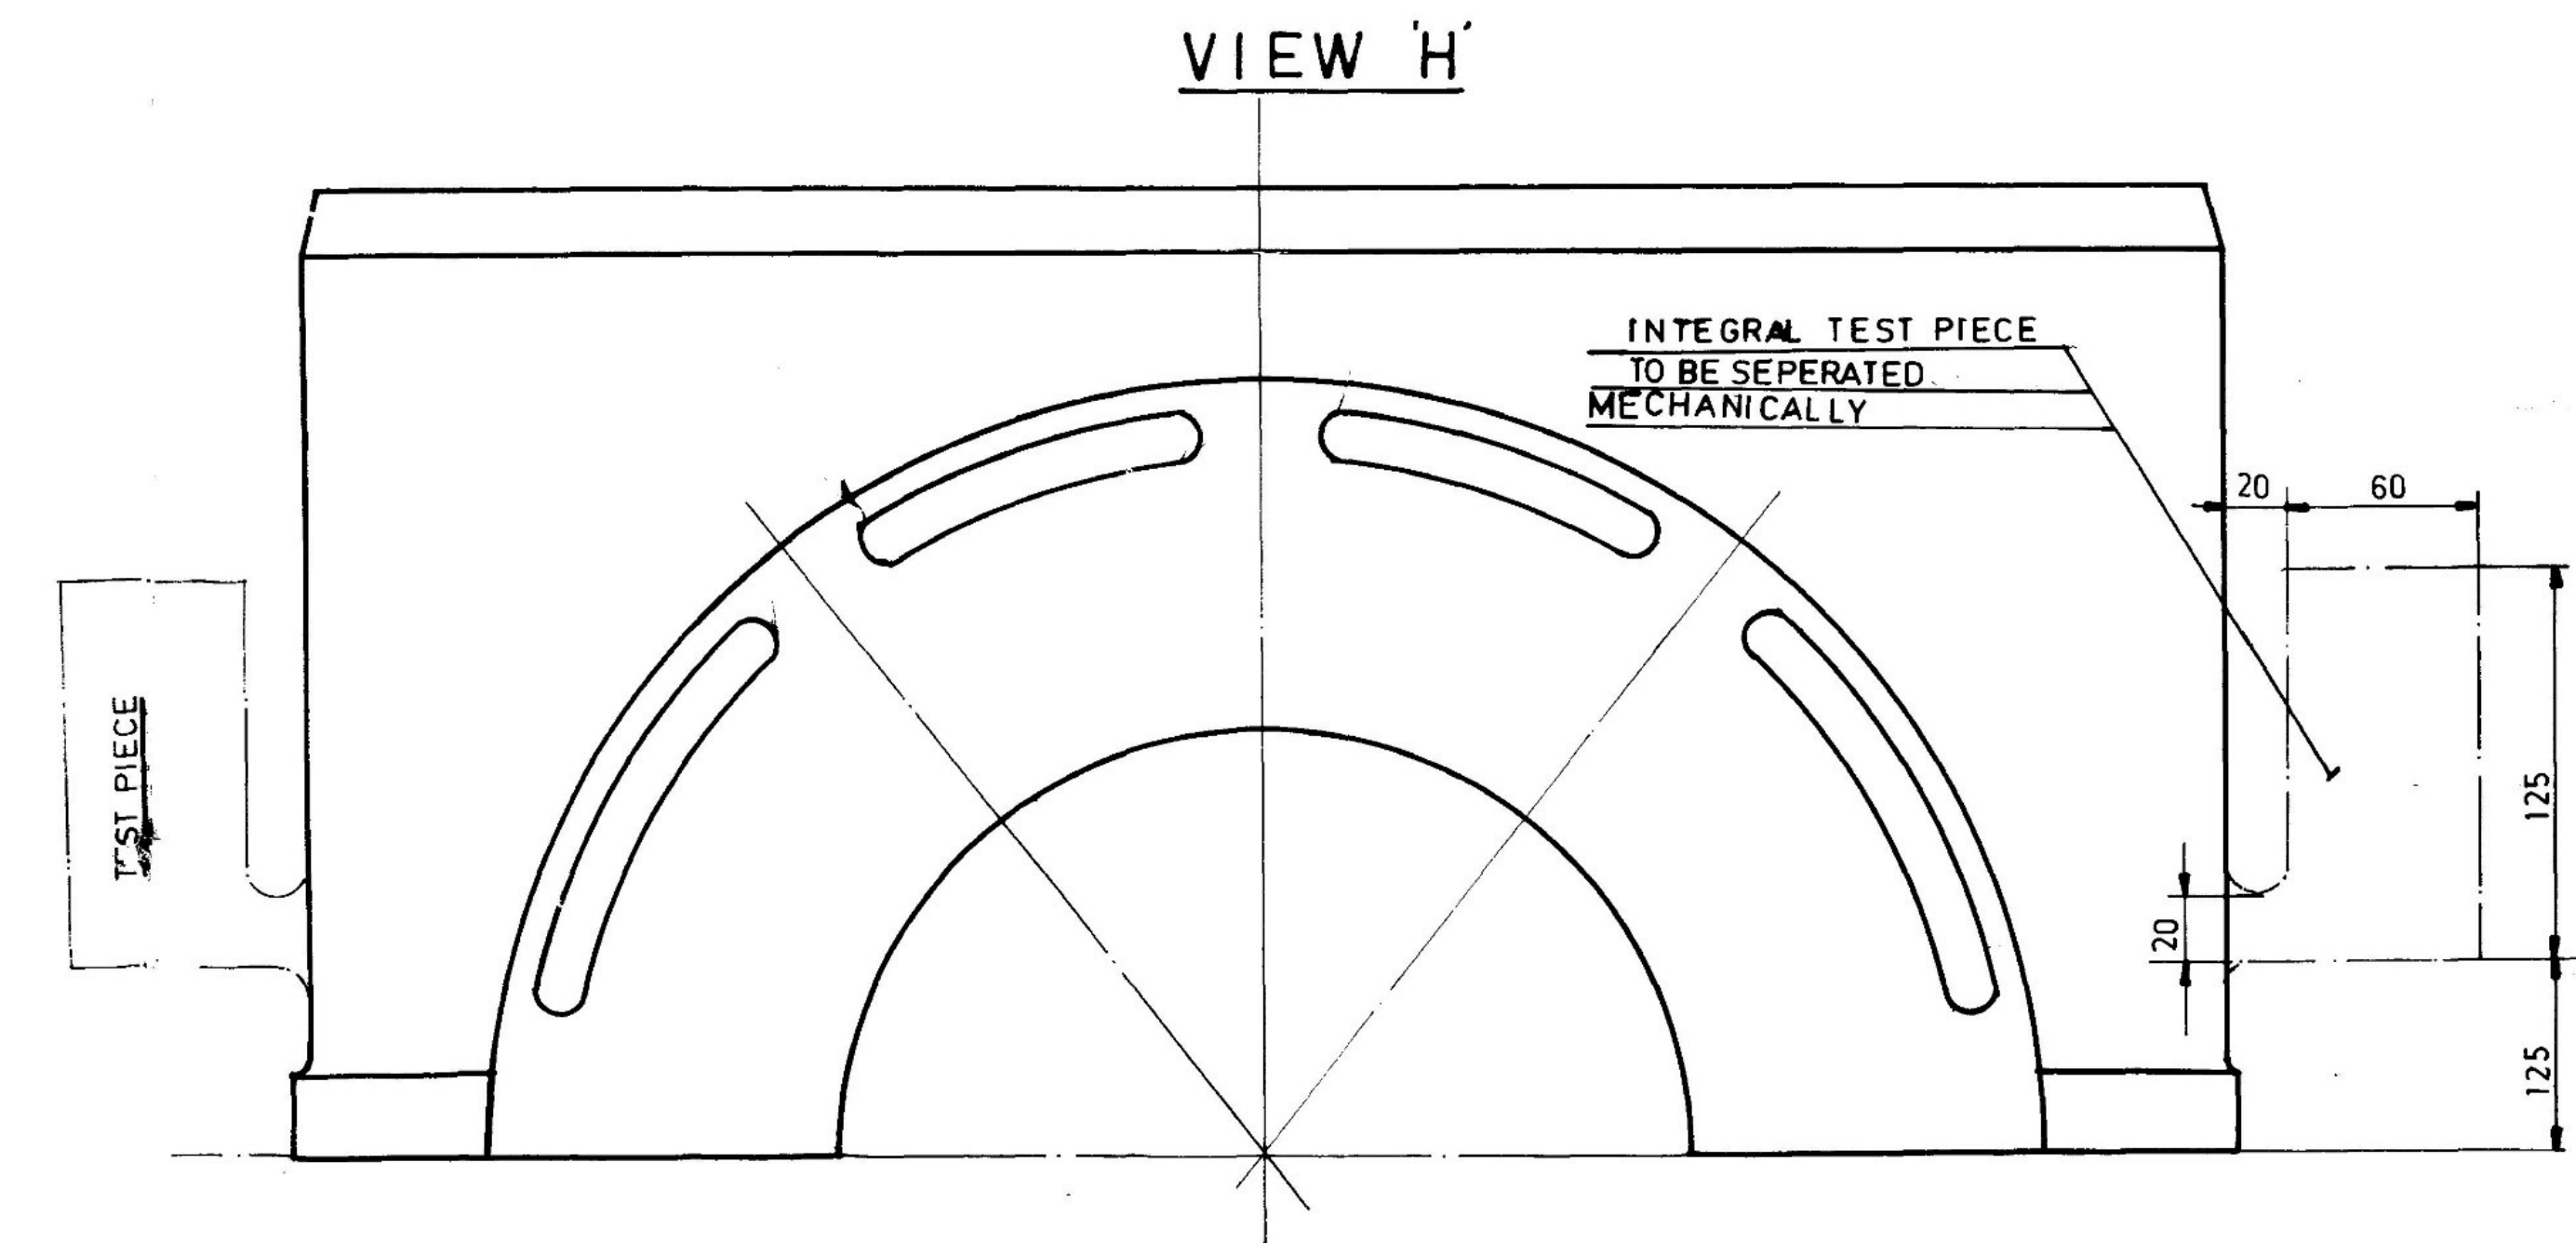

DEVELOPMENT OF SECTION F-F ON MEAN DIA. 900

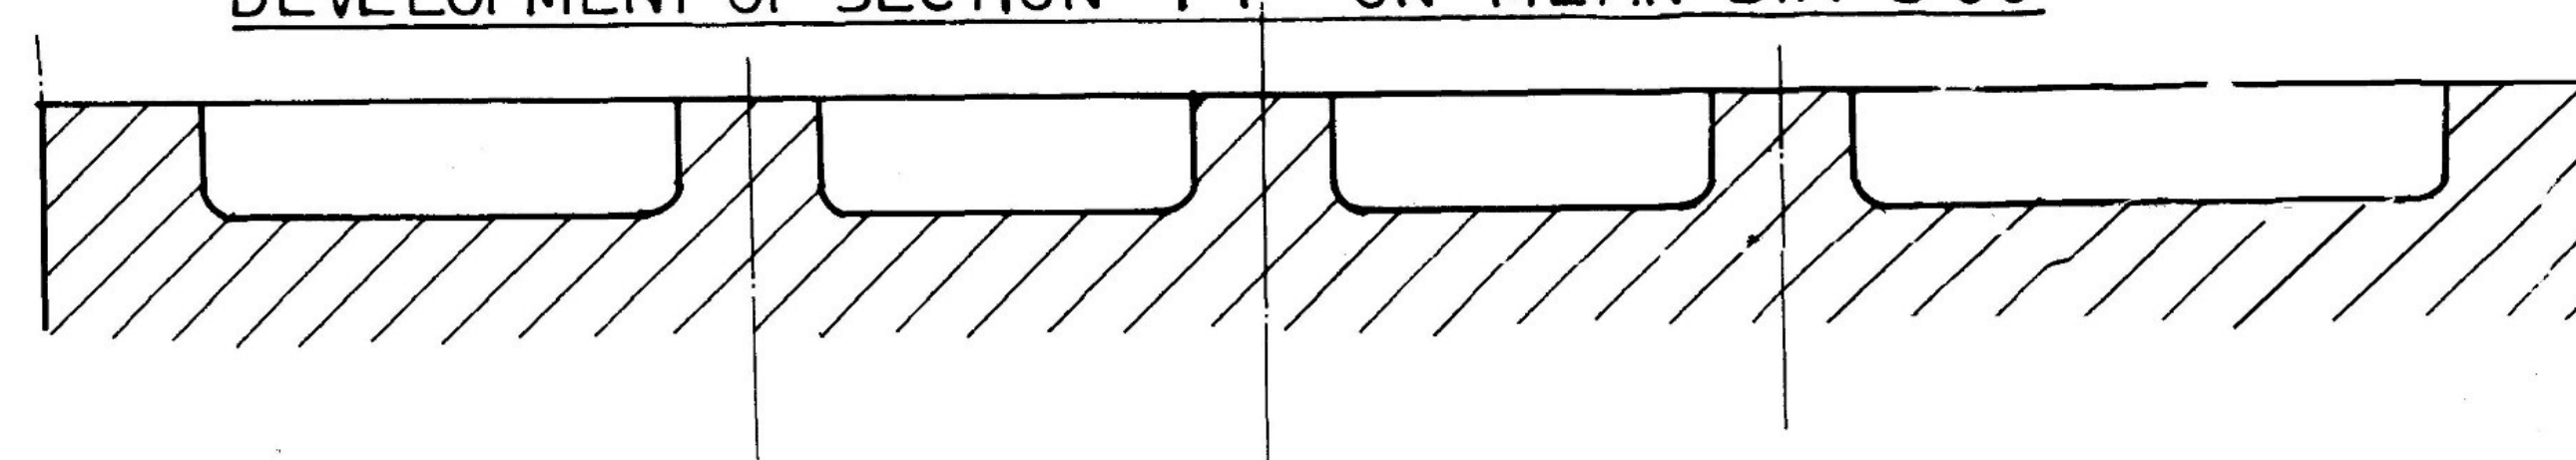


SECTION D-D

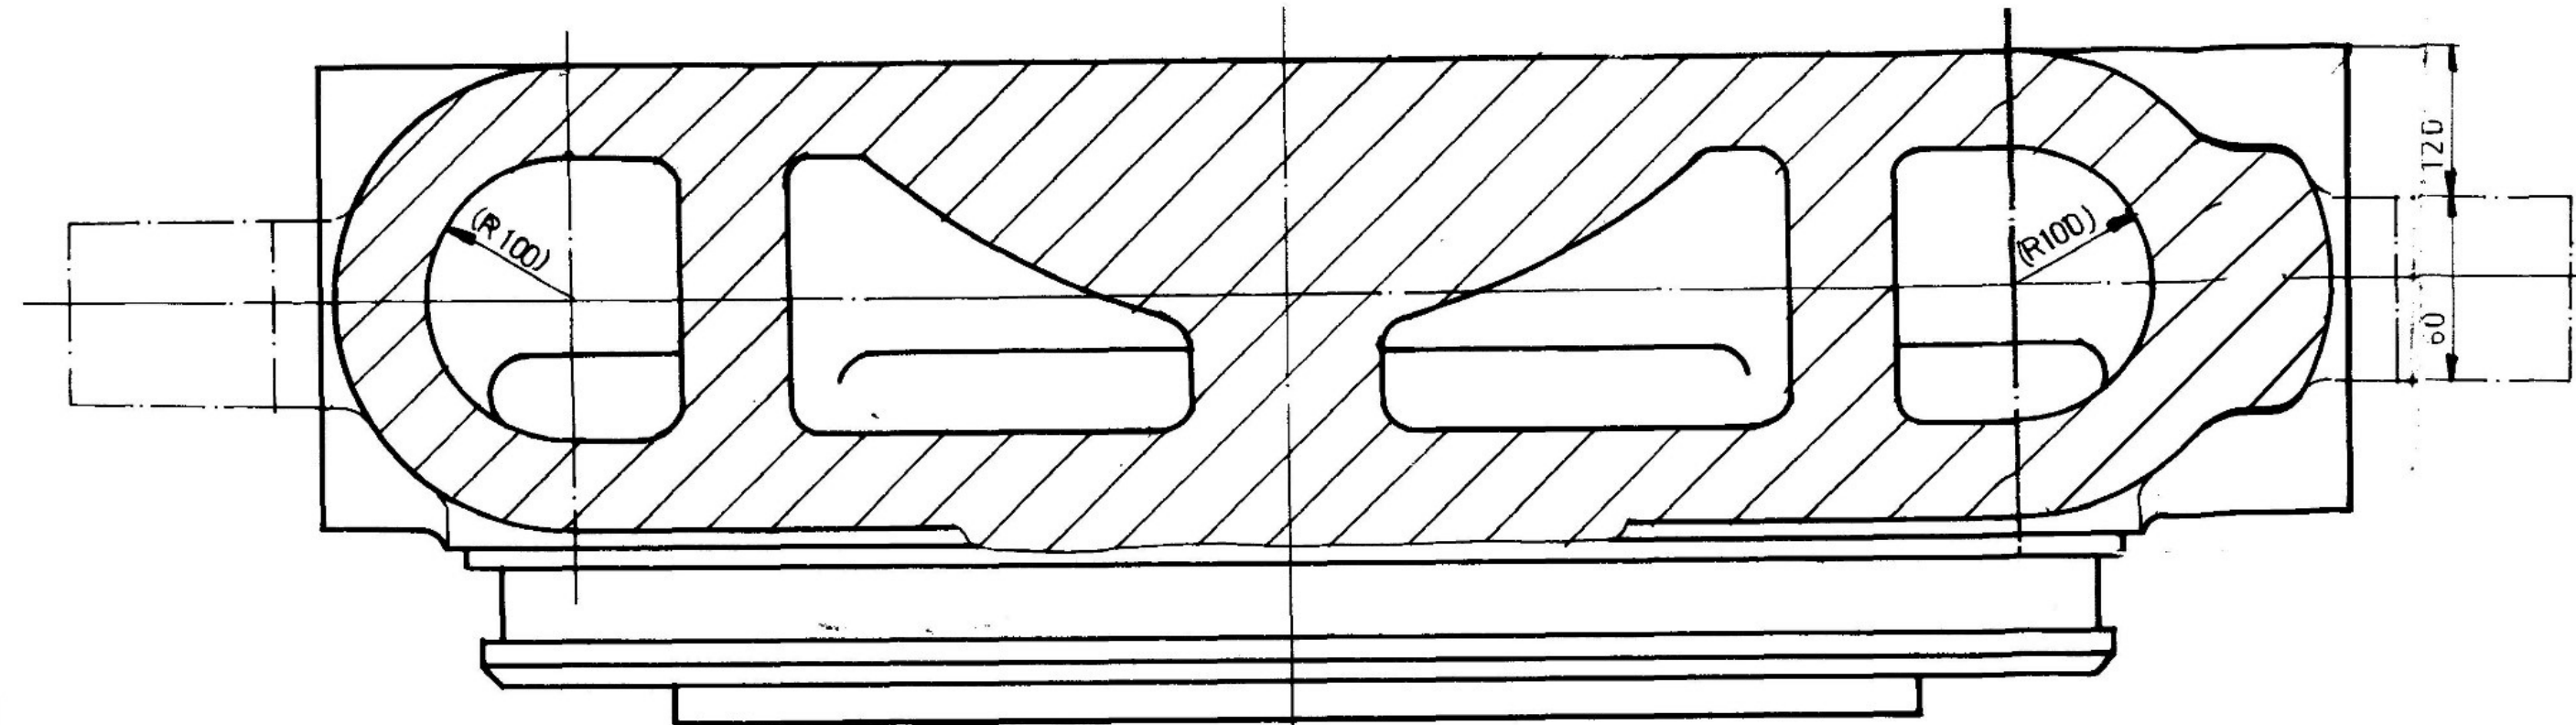

NOTES:-

1. CASTING TO BE SUPPLIED AS PER PLANT PURCHASE SPECIFICATION, AS MENTIONED IN THE VARIANT TABLE.
2. TWO INTEGRAL KEEL BLOCKS ARE TO BE PROVIDED ON EACH CASTING AT APPROPRIATE PLACES.
3. THE CASTING SHOULD NOT CONTAIN ANY CHAPLETS AND CHILLS.
4. WELDED ON COREPRINTS TO BE MARKED WITH CENTRE PUNCH FOR IDENTIFICATION.
5. MARKINGS AS PER PLANT PURCHASE SPECIFICATION TO BE MADE AS PLACES SHOWN THUS
6. MARKINGS SHOWN THUS REPRESENT PATTERN PARTITION.
7. UNMENTIONED RADII R = 20 mm.

TC	REV	DATE	HY	GP	GH	WT	VAR.
TC9217008222	660		HY19570	GP 240 GH	1175	13	
TC9217008206	660		HY19570	GP 240 GH	1175	12	
	680			GS - C25	1210	-11	
TC 9217107530	680		HY 195 71	GS - 22Mo4	1210	-10	
	680			GS - 17CrMo55	1210	-09	
	680			GS - 17CrMo55	1210	-08	
	680			GS - C25	1500	-07	
TC 9217107778	680		HY 195 71	GS - 22Mo4	1300	-06	
	680			GS - 17CrMo55	1300	-05	
	680			GS - 17CrMo55	1300	-04	
	680			GS - C25	1080	-03	
	680			GS - 22Mo4	1080	-02	
	680			GS - 17CrMo55	1080	-01	
	680			GS - 17CrMo55	1080	-00	
MATERIAL CODE	680		PLANT PURCHASE SPECIFICATION	MATERIAL (OLD)	WT (g)	VAR.	



BHARAT HEAVY ELECTRICALS. LTD.
CENTRAL FOUNDRY FORGE PLANT
RANIPUR HARDWAR

DEPT. TECH.

FD. TECH.

SCALE

WEIGHT

NAME

SIGN

DATE

TITLE

STEAM CHAMBER

UPPER HALF (BZ)











PROJECT AND CUSTOMER NAME

TECHNOLOGY NO.

DRAWING NO.

SHEET NO.


NO. OFF SHEETS

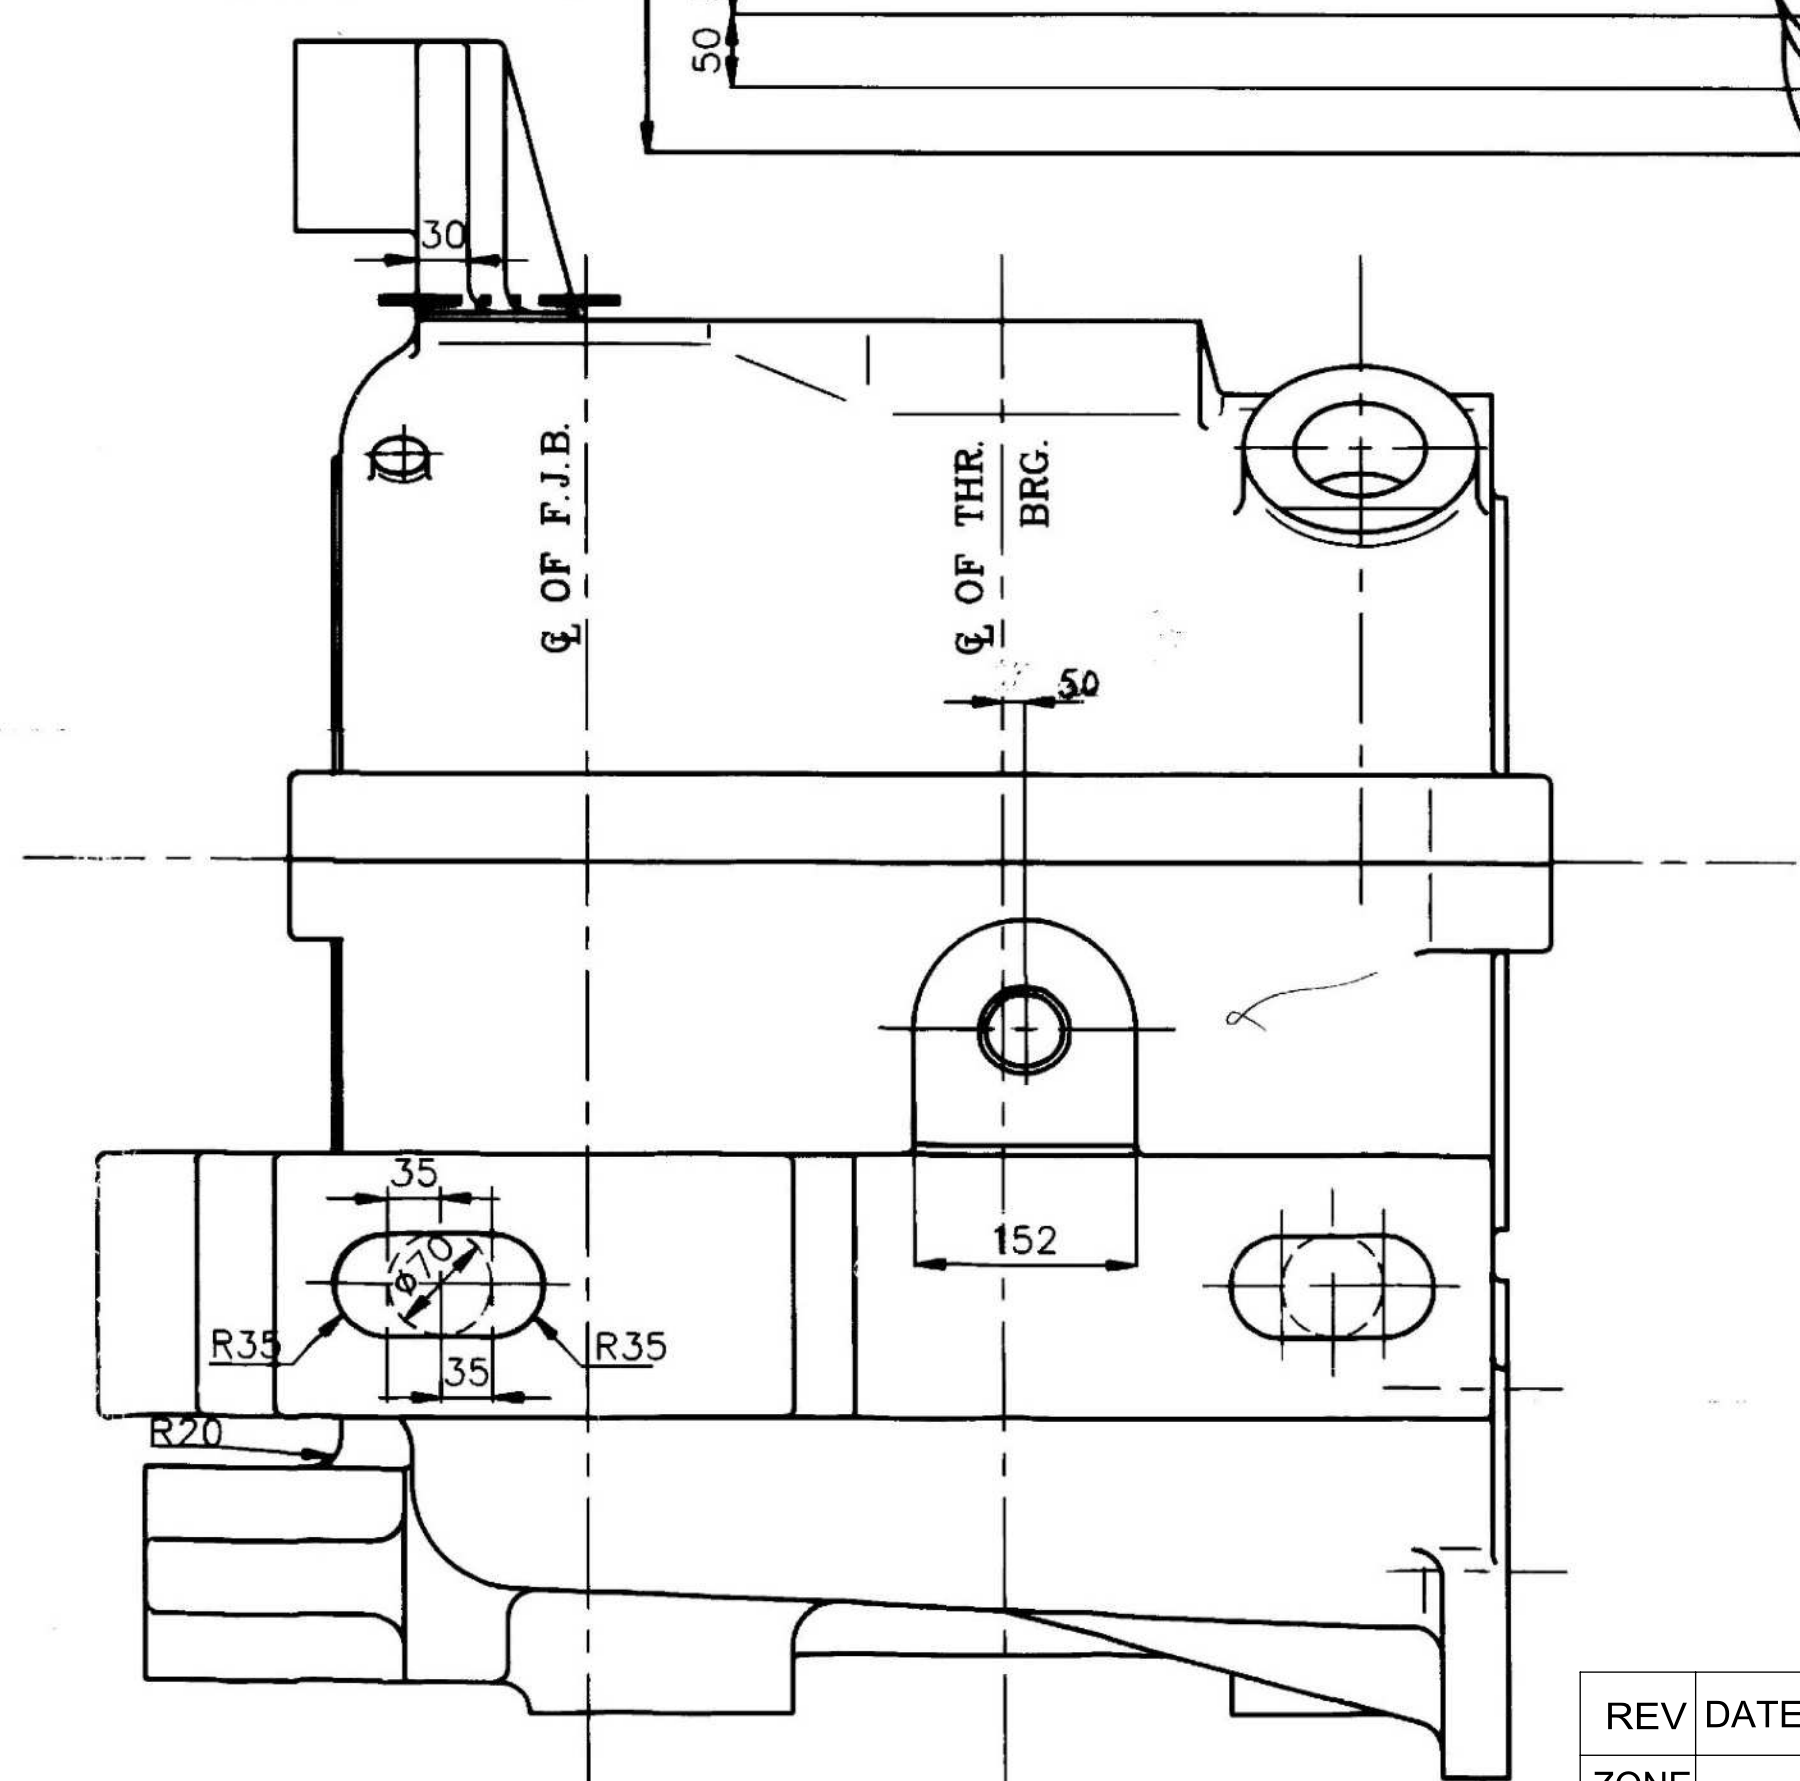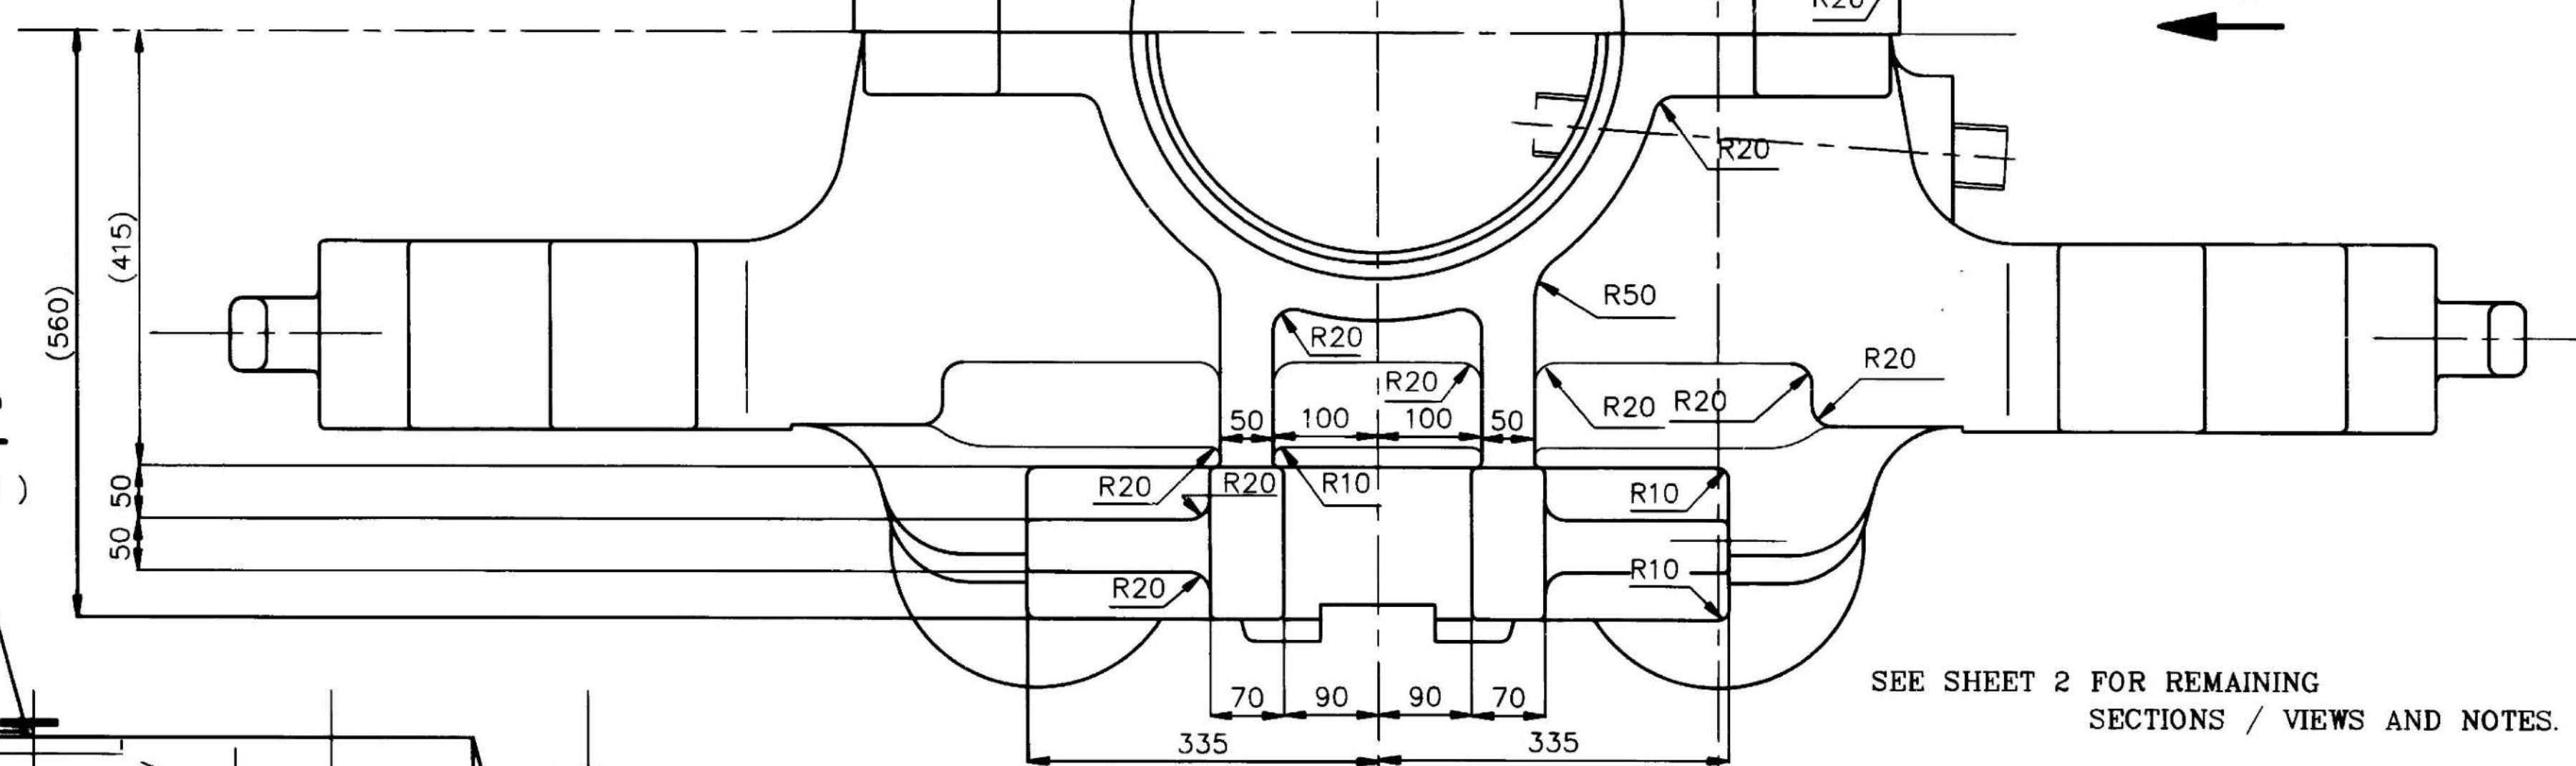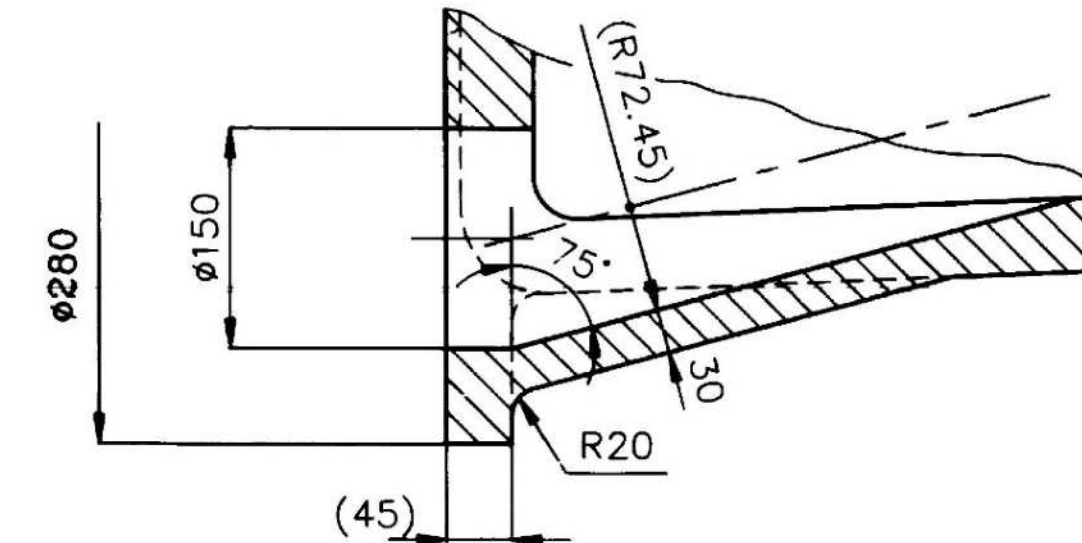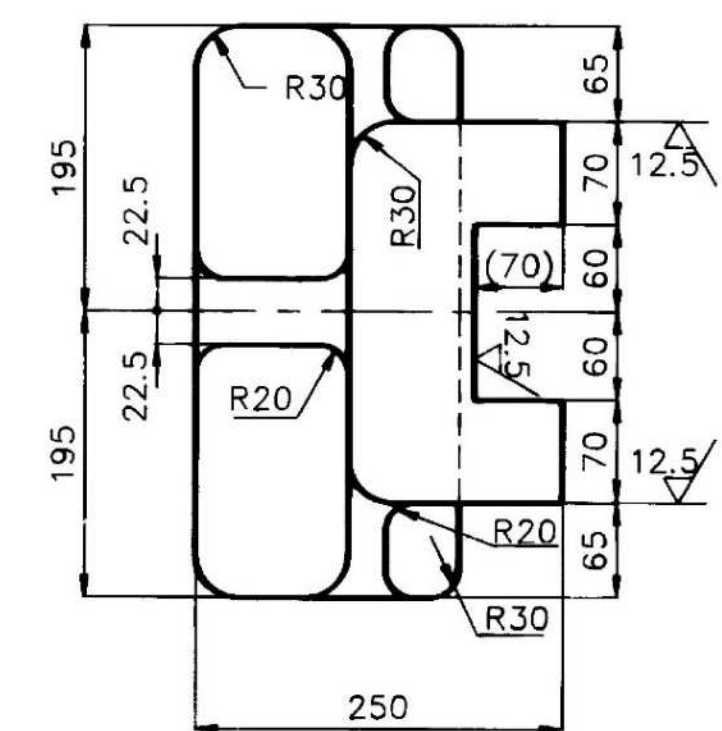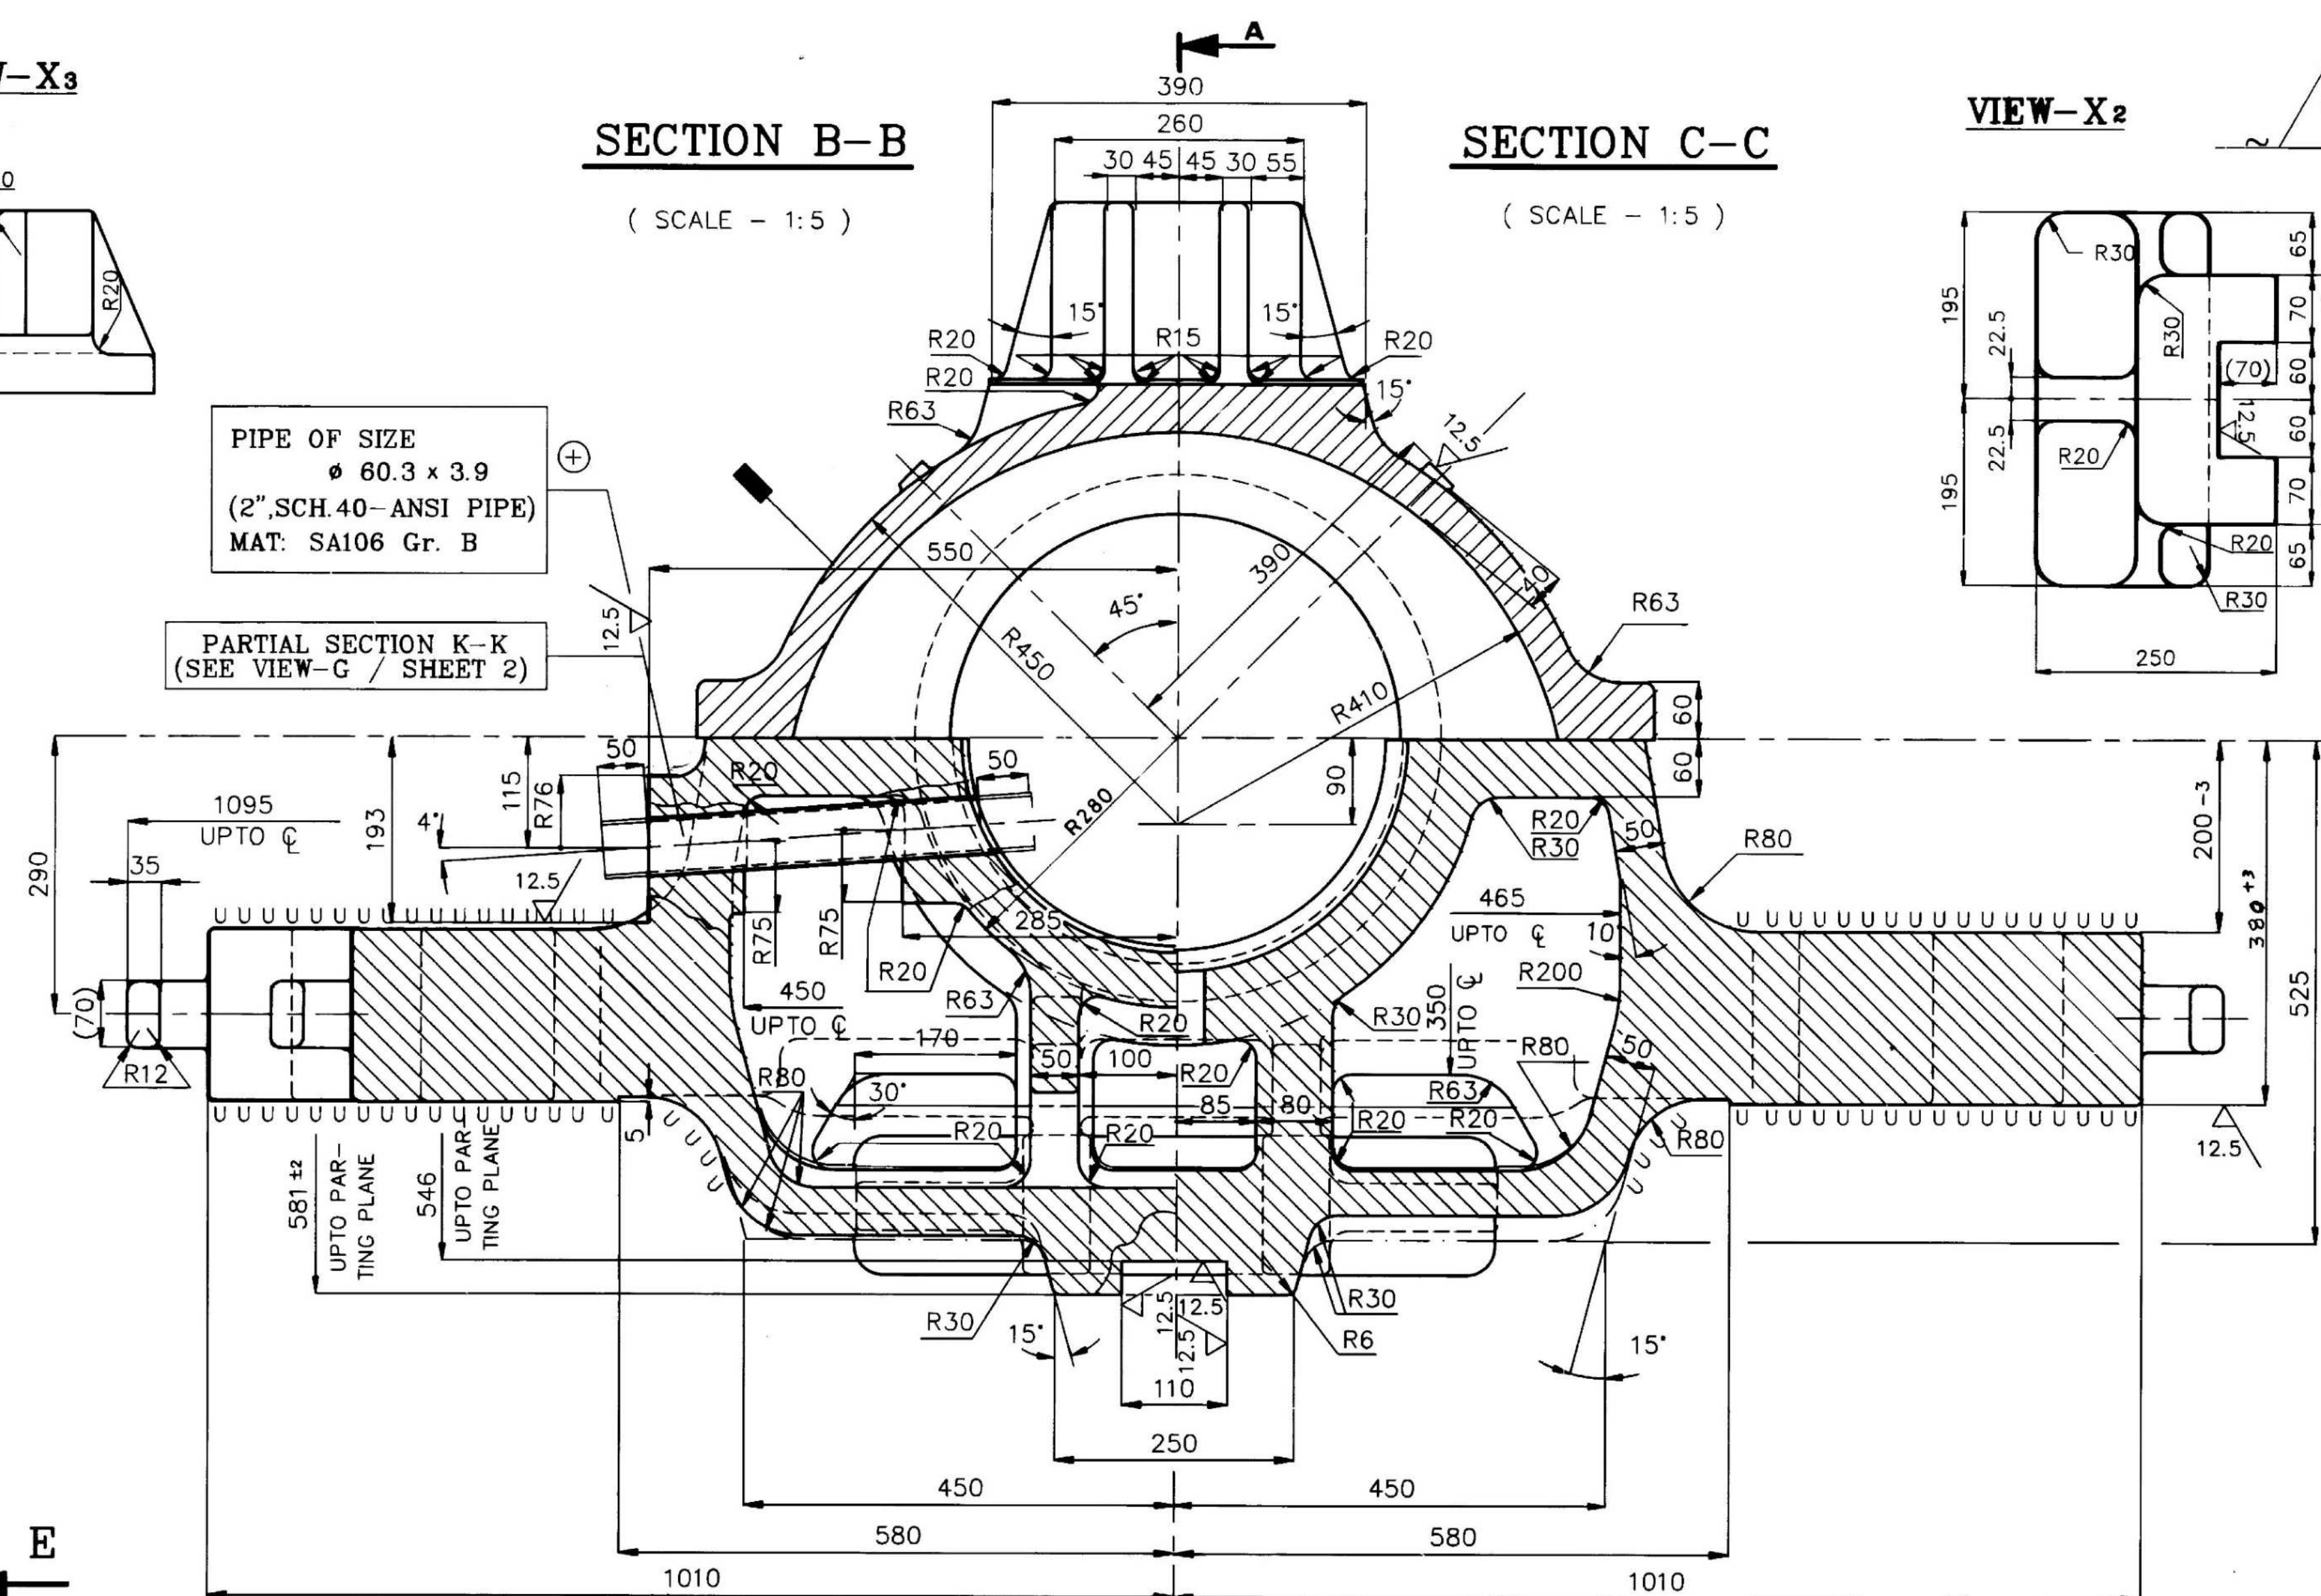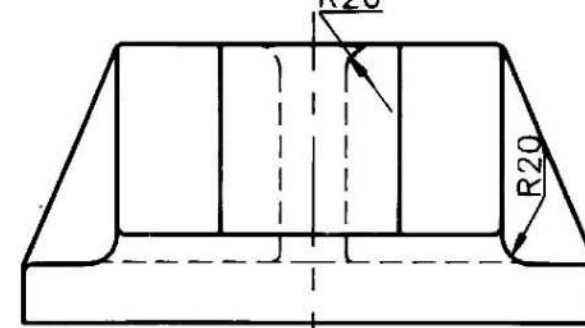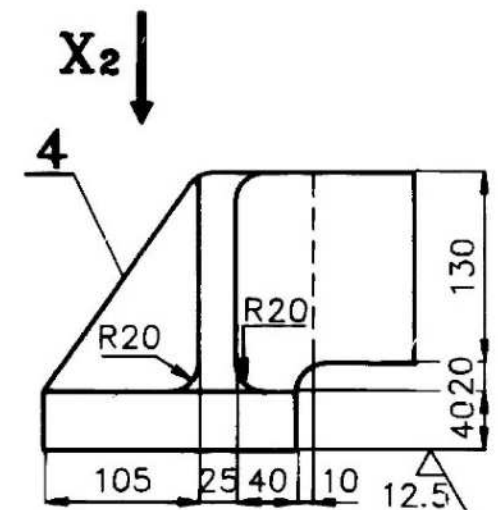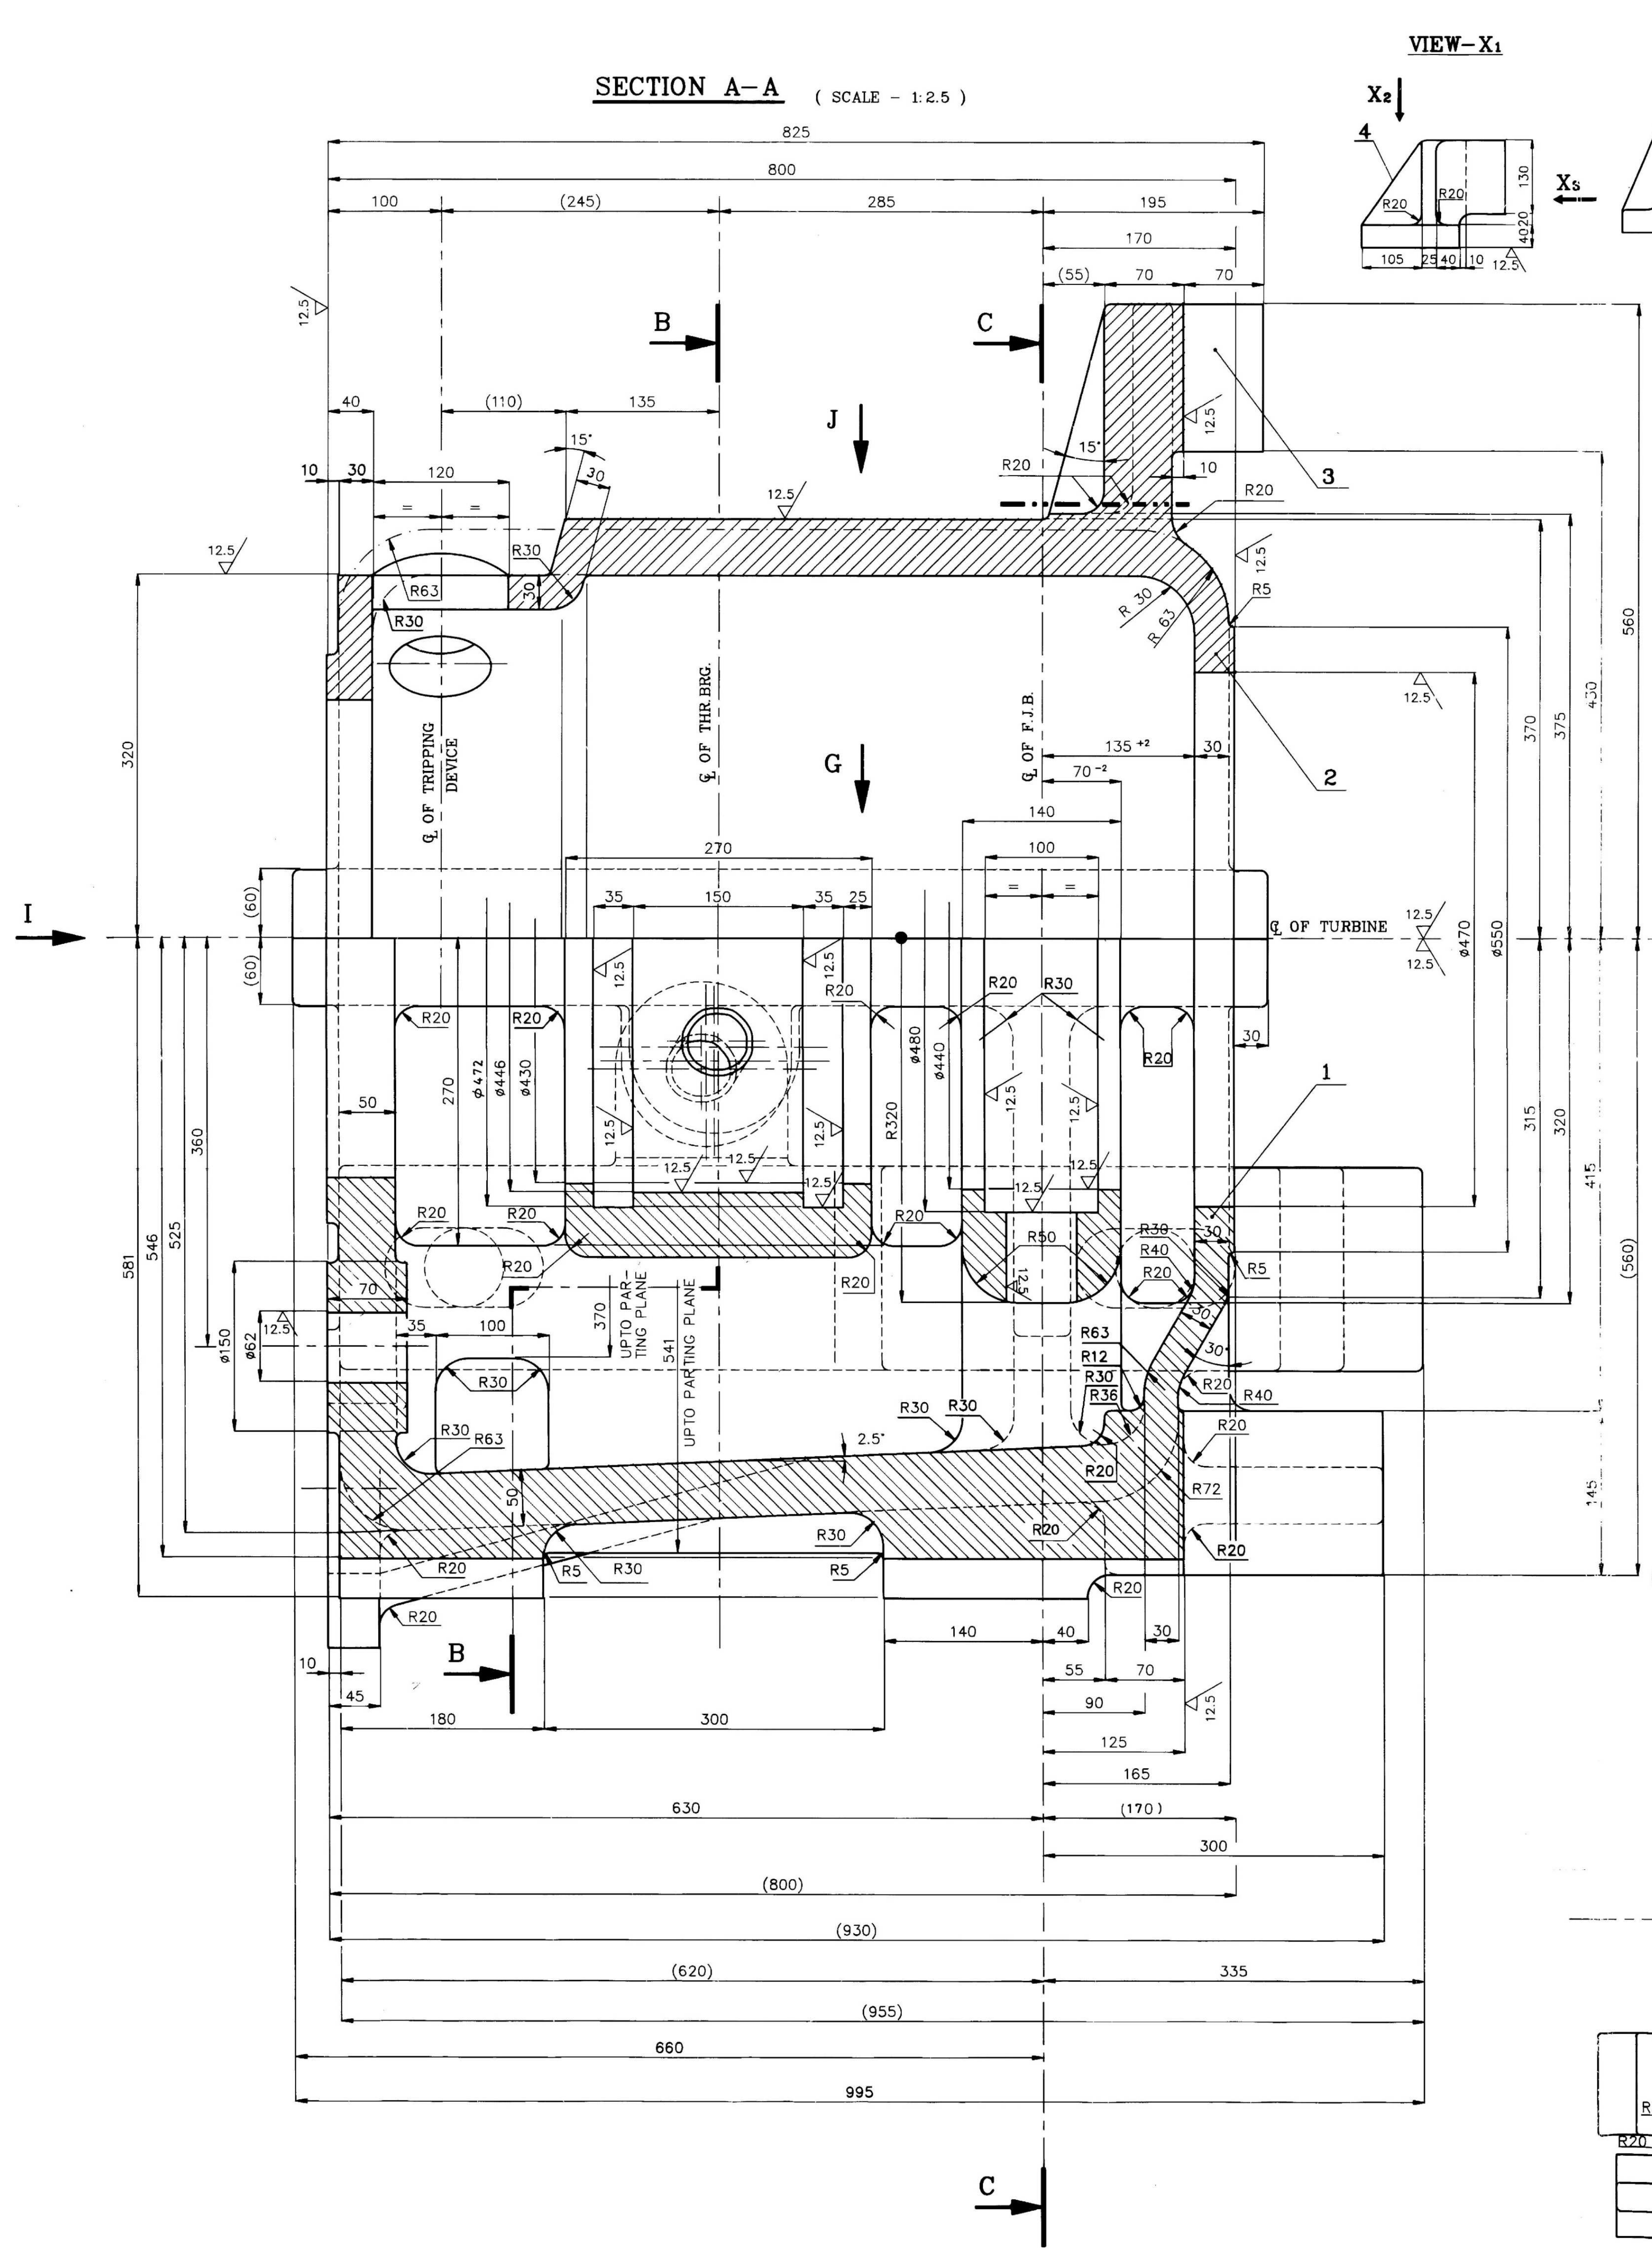



4	45
3	35
2	325
1	1900
SUB POS. NO.	WEIGHT (K.G)

50	45	TC9216946180	4	M-11- 850-03	GS-C25 HY19569	GUIDE	03
50	325	TC9216946156	2	M-11- 846-02	GS-C25 HY19569		
63	360	TC9216946164	2,3	M-11- 846-01	GS-C25 HY19569	U.P.	01
50,63	1900	TC9216946172	1	M-11- 849-00	GS-C25 HY19569	L.P.	00
APPLICABLE OUTER CASING FRONT PORTION SIZE	WEIGHT (K.G.)	MATERIAL CODE	VALID SUB POSITIONS	PATTERN NO.	MATERIAL	PART DESCRIP- TION	VAR
					PLANT PURCH- ASE SPEC		

REV	DATE	ALTERED CHECKED	REV	DATE	ALTERED CHECKED	REV	DATE	ALTERED CHECKED
ZONE			ZONE			ZONE		
6			5			4		

		BHARAT HEAVY ELECTRICALS. LTD. CENTRAL FOUNDRY FORCE PLANT RANIPUR HARDWAR			
DEPT. FDY.TECH.		SCALE N.T.S.	WEIGHT	NAME	SIGN DATE
TITLE FRONT BEARING PEDESTAL S-2-63			DRN W/D CHD APPD	NAVEEN R. LAKRA T. DAVE	
PROJECT AND CUSTOMER NAME		TECHNOLOGY NO		DRAWING NO. 0-302-01-10018/S -- NO. OF SHEETS: --	

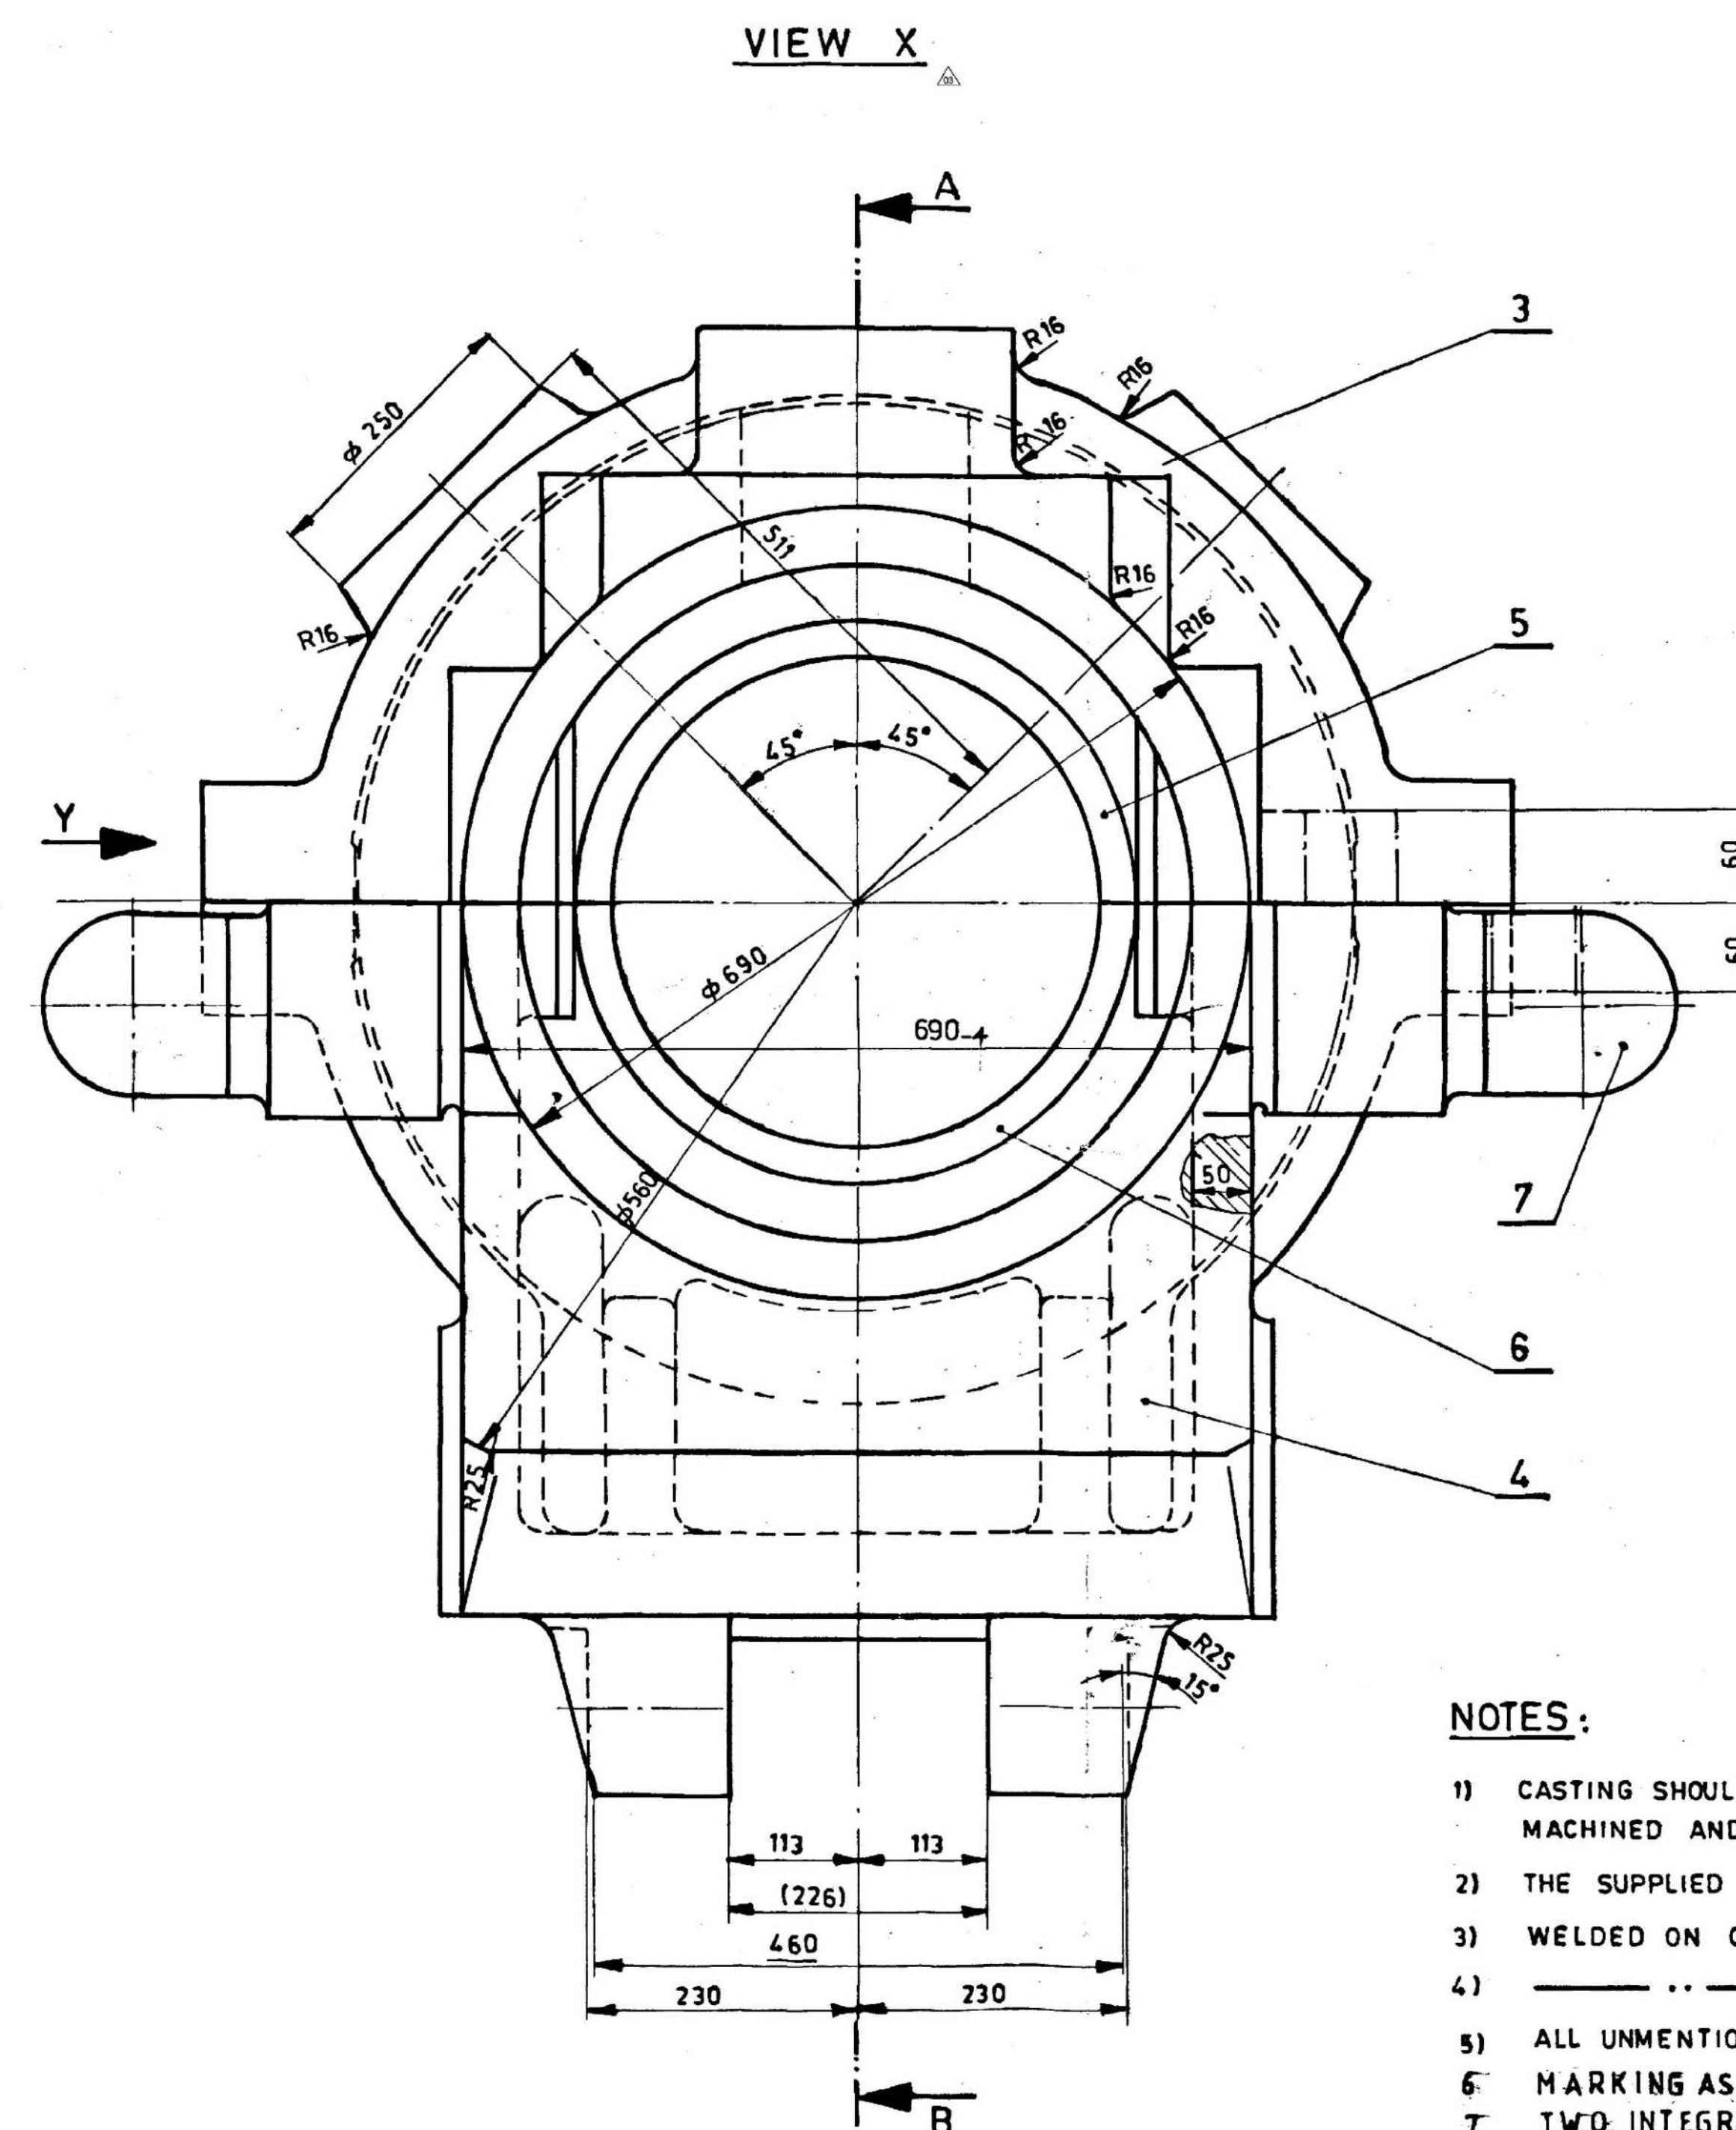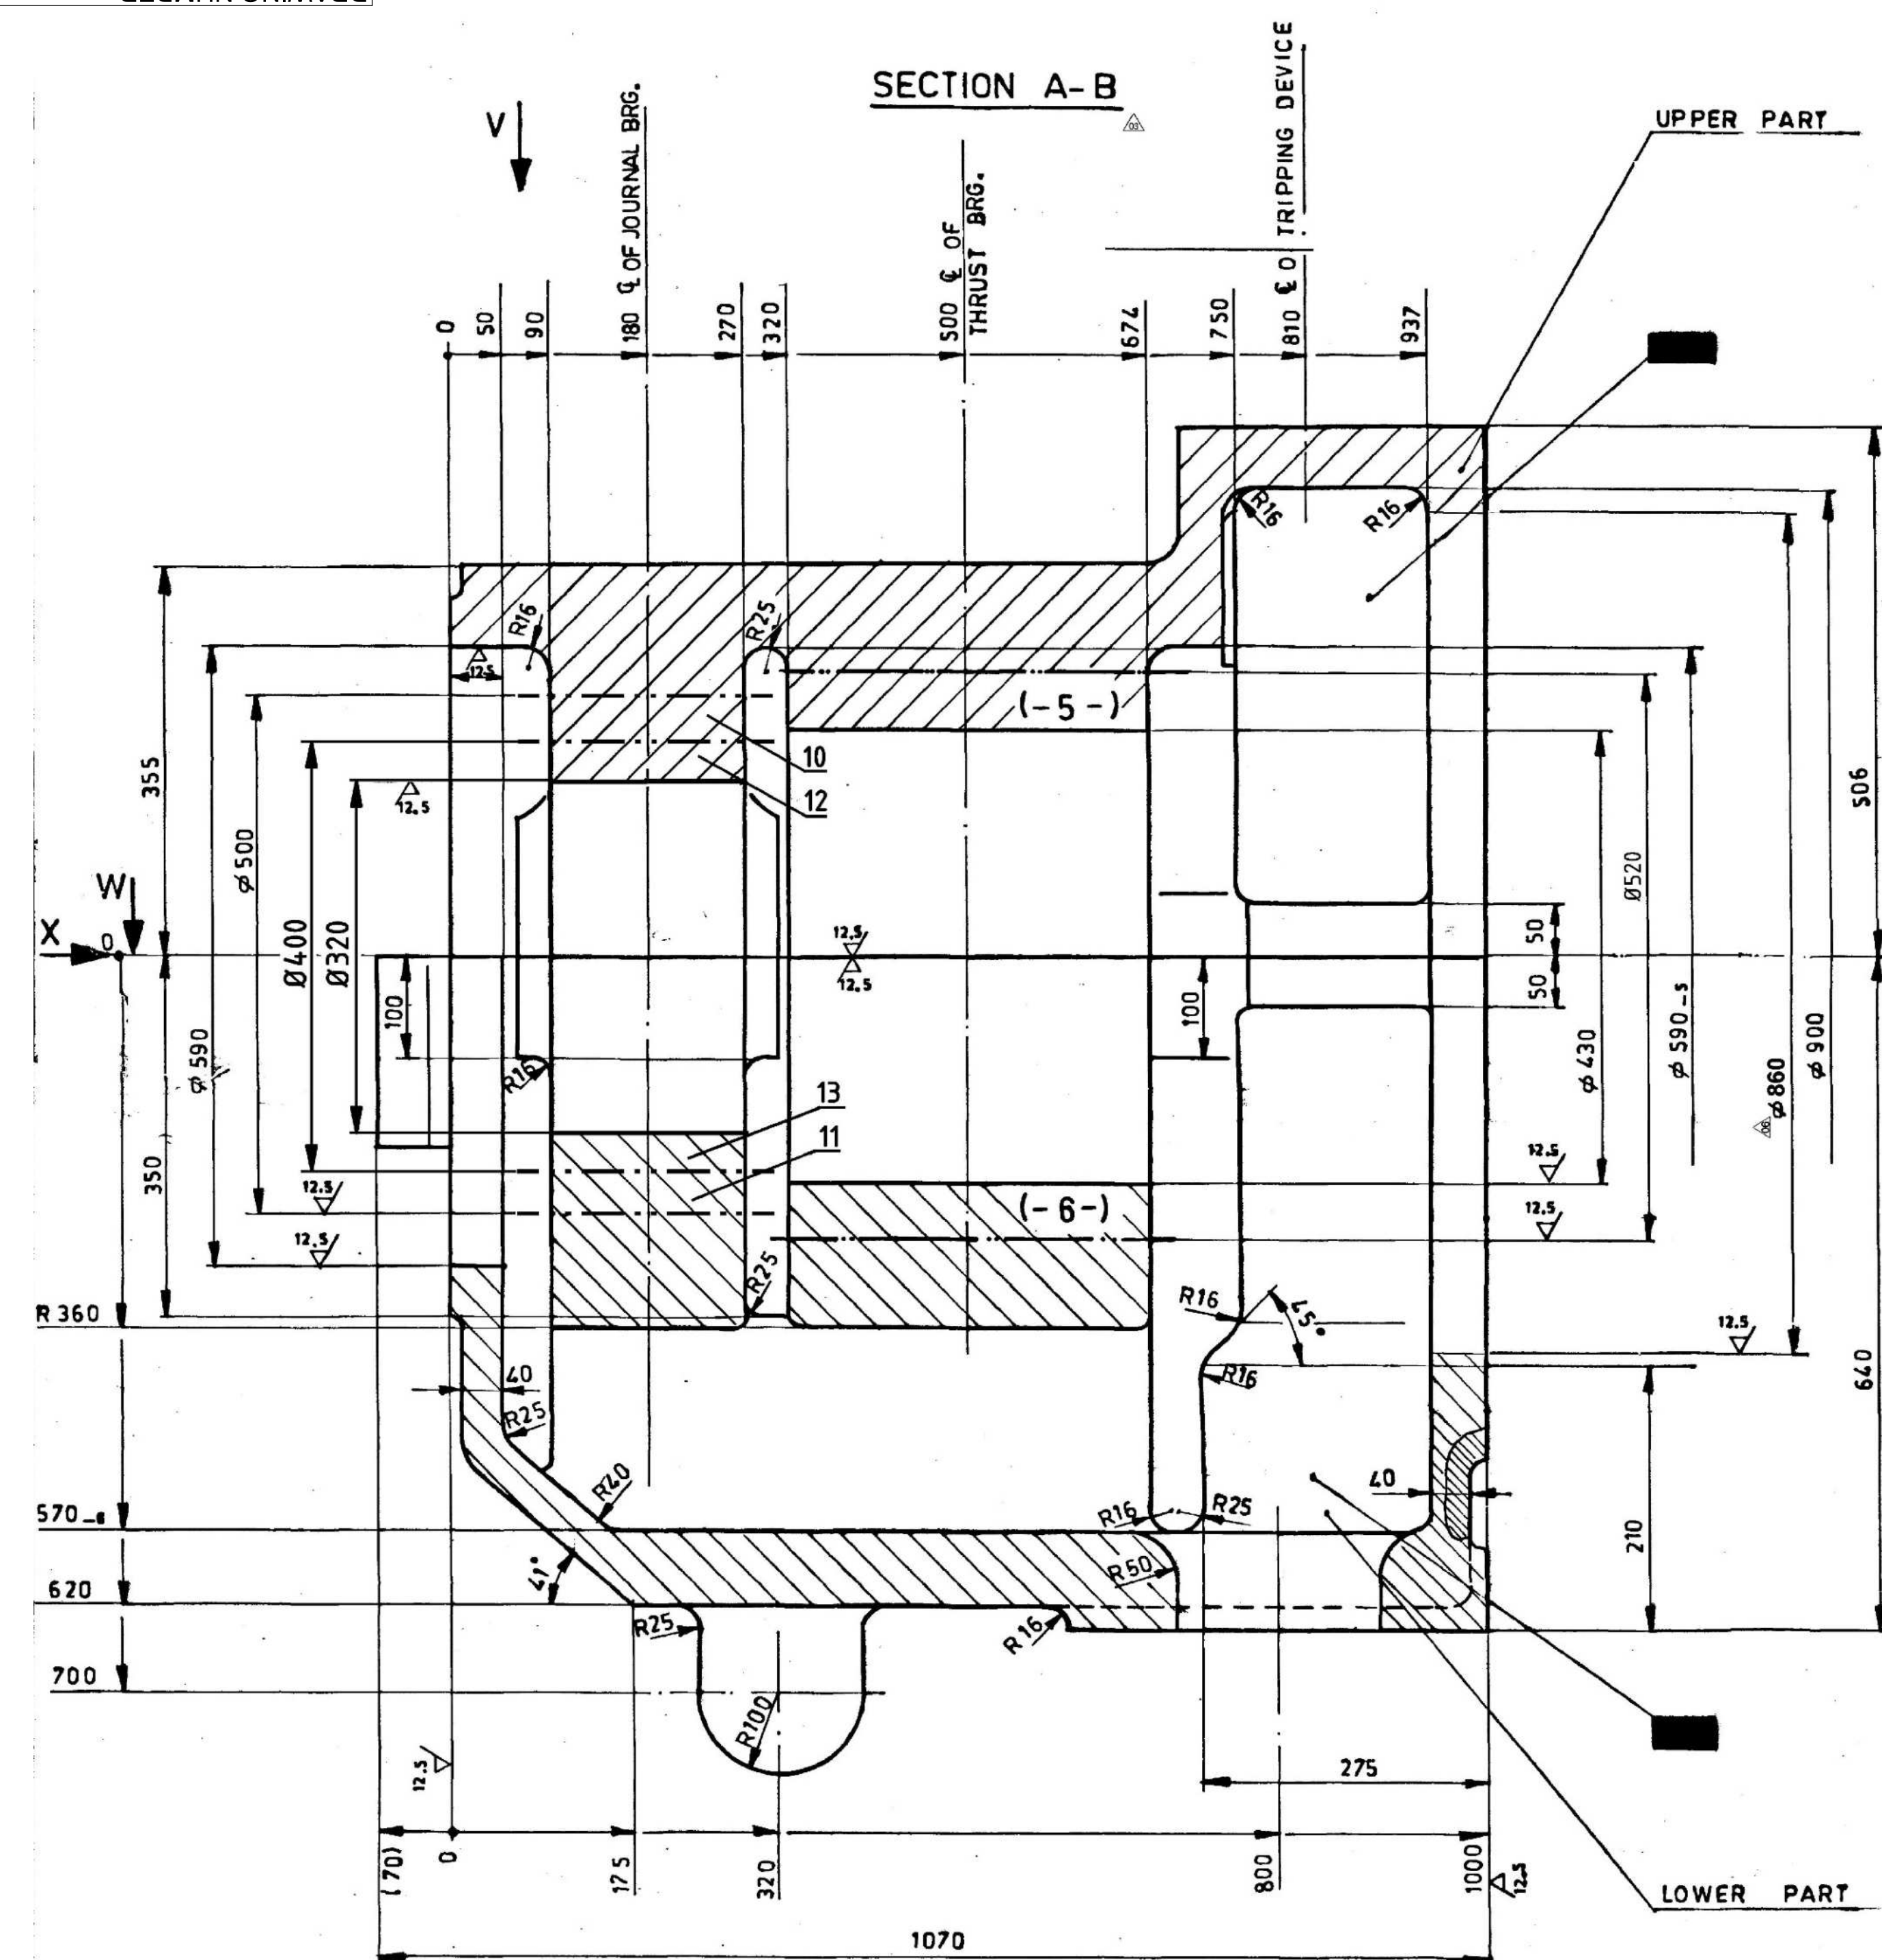

- NOTES :

1) CASTING SHOULD BE SUPPLIED IN COMPLETELY ROUGH
MACHINED AND HEAT TREATED CONDITION AS PER PLANT PURCHASE SPECIFICATION MENTIONED IN VARIANT TABLE

2) THE SUPPLIED CASTING SHOULD NOT CONTAIN ANY CHAPLETS OR CHILLS.






3) WELDED ON CORE PRINTS ARE TO BE MARKED WITH CENTRE PUNCH.

4) _____ .. _____ LOOSE PATTERN PIECES

5) ALL UNMENTIONED RADII $R = 4$


6) MARKING AS PER PLANT PURCHASE SPECIFICATION TO BE MADE AT PLACES SHOWN THUS _____

7) TWO INTEGRAL KEEL BLOCKS ARE TO BE PROVIDED ON THIS CASTING AT APPROPRIATE PLACES

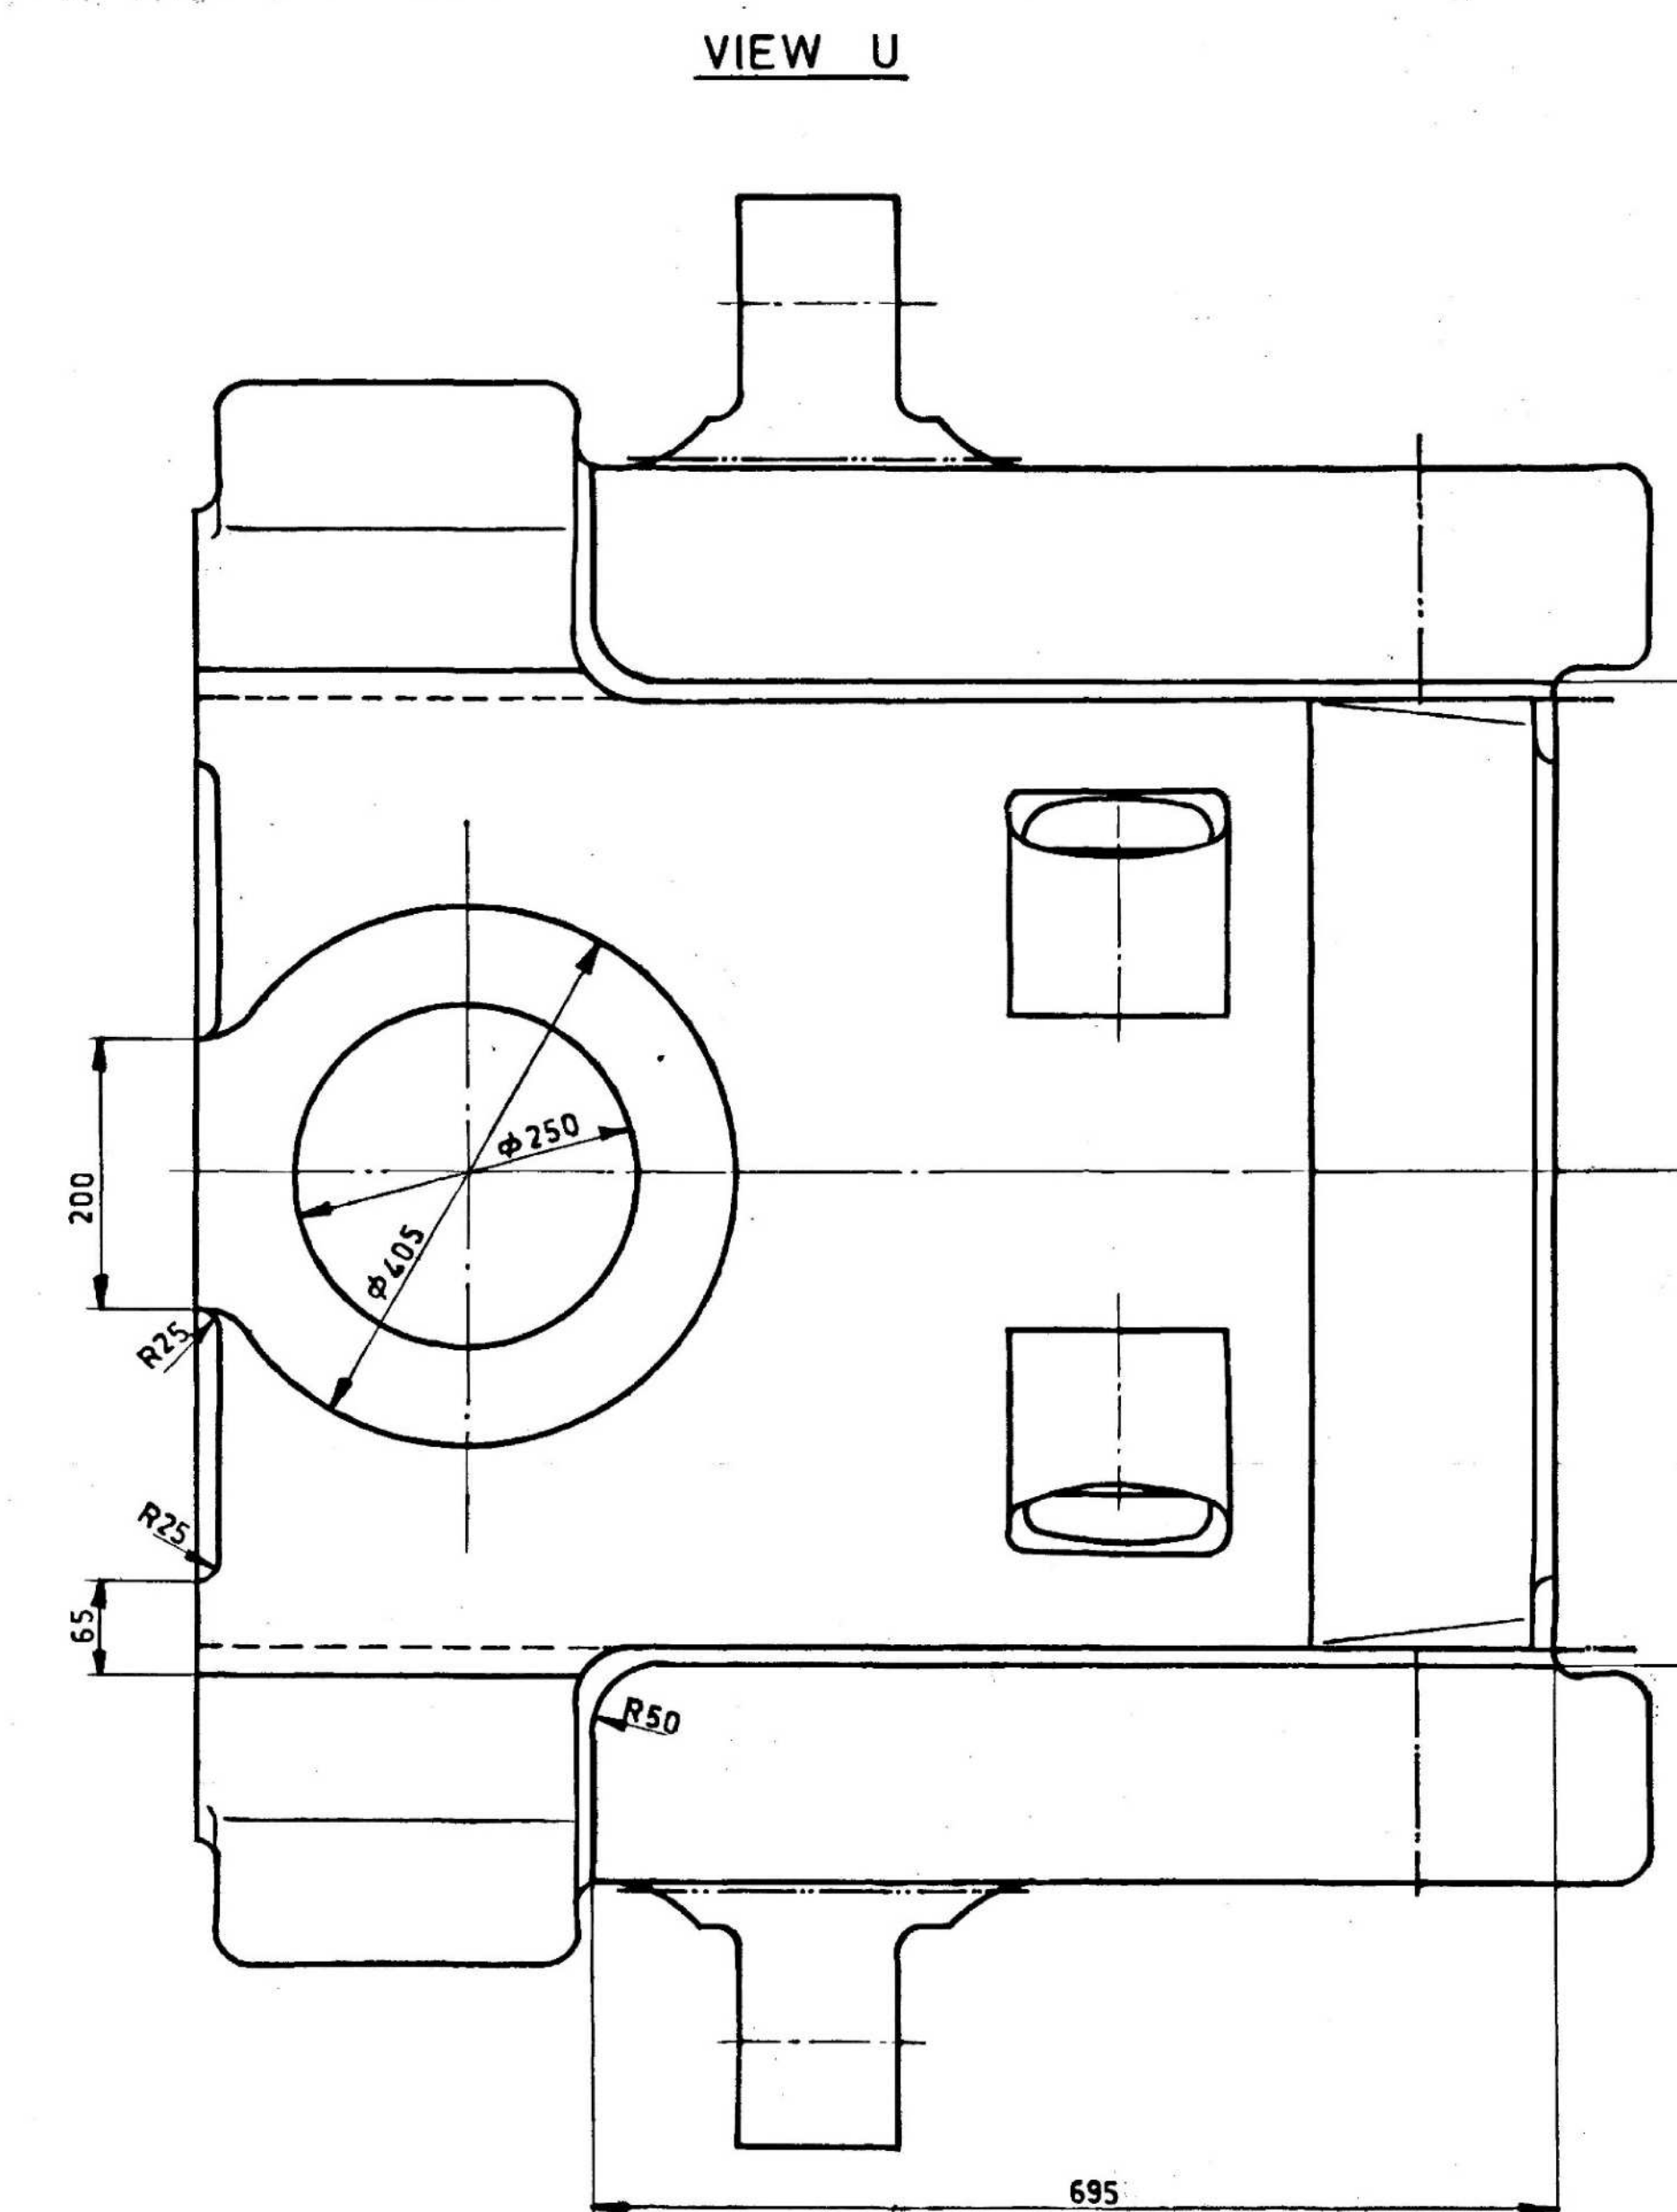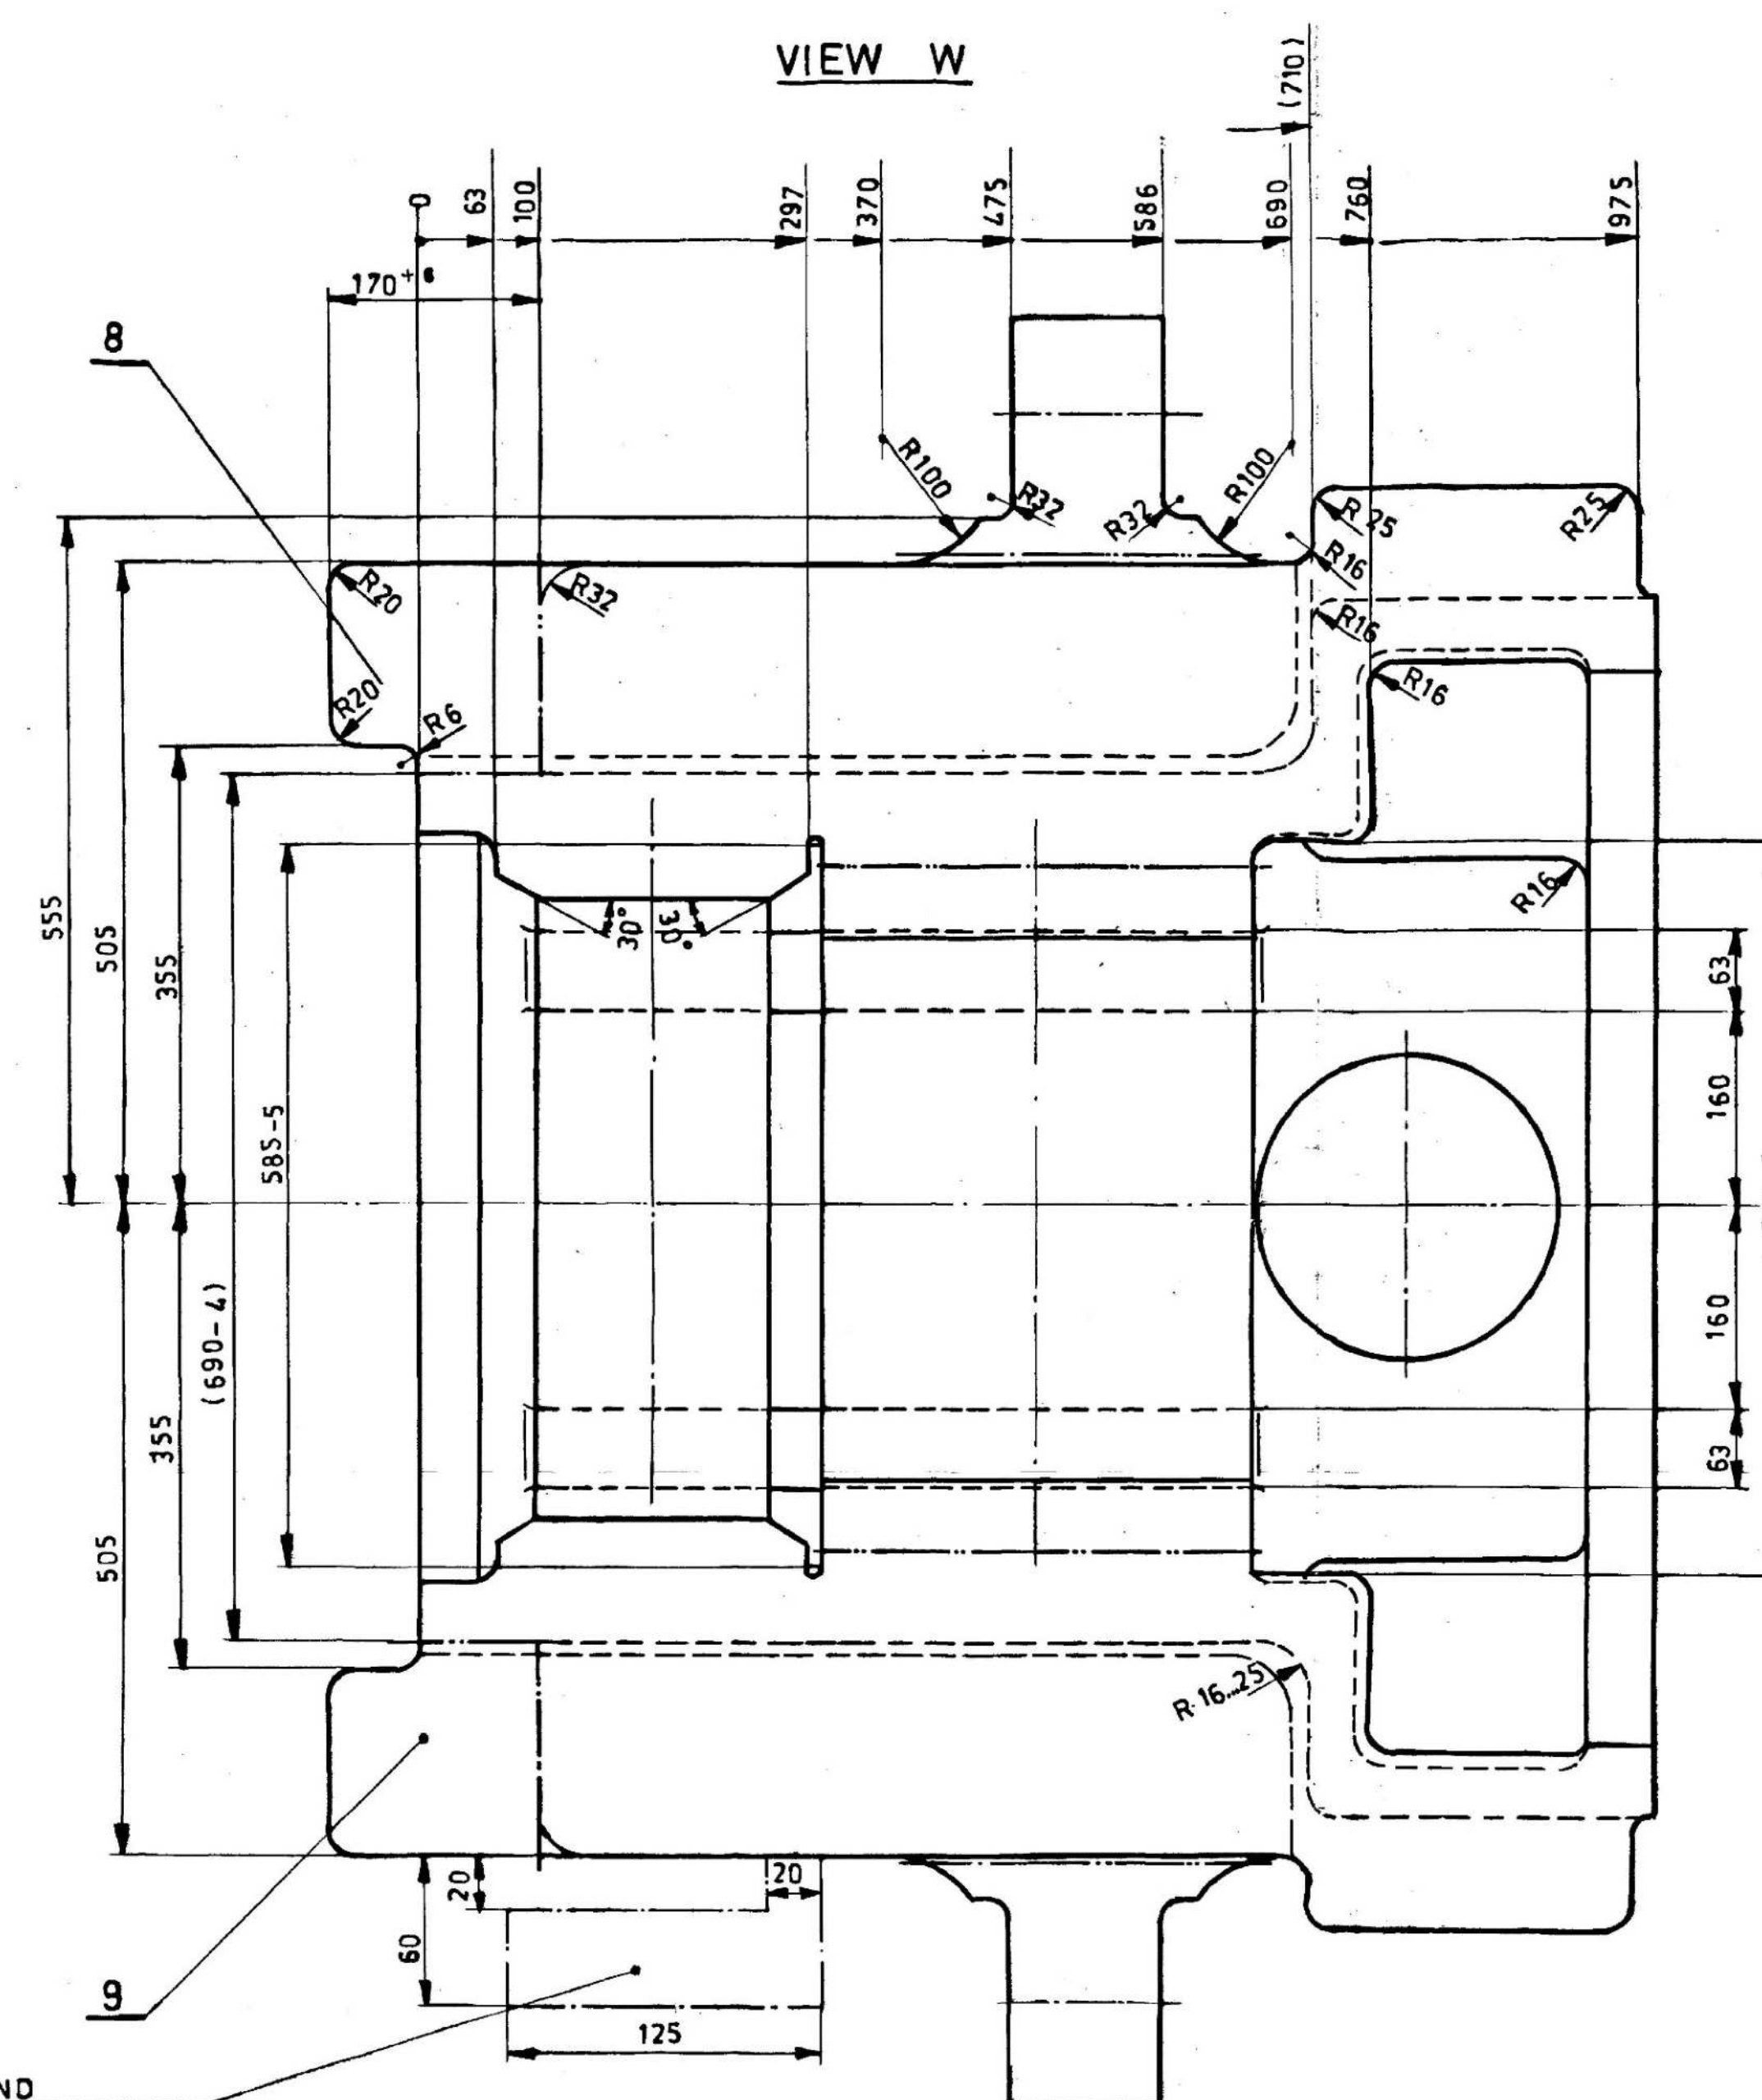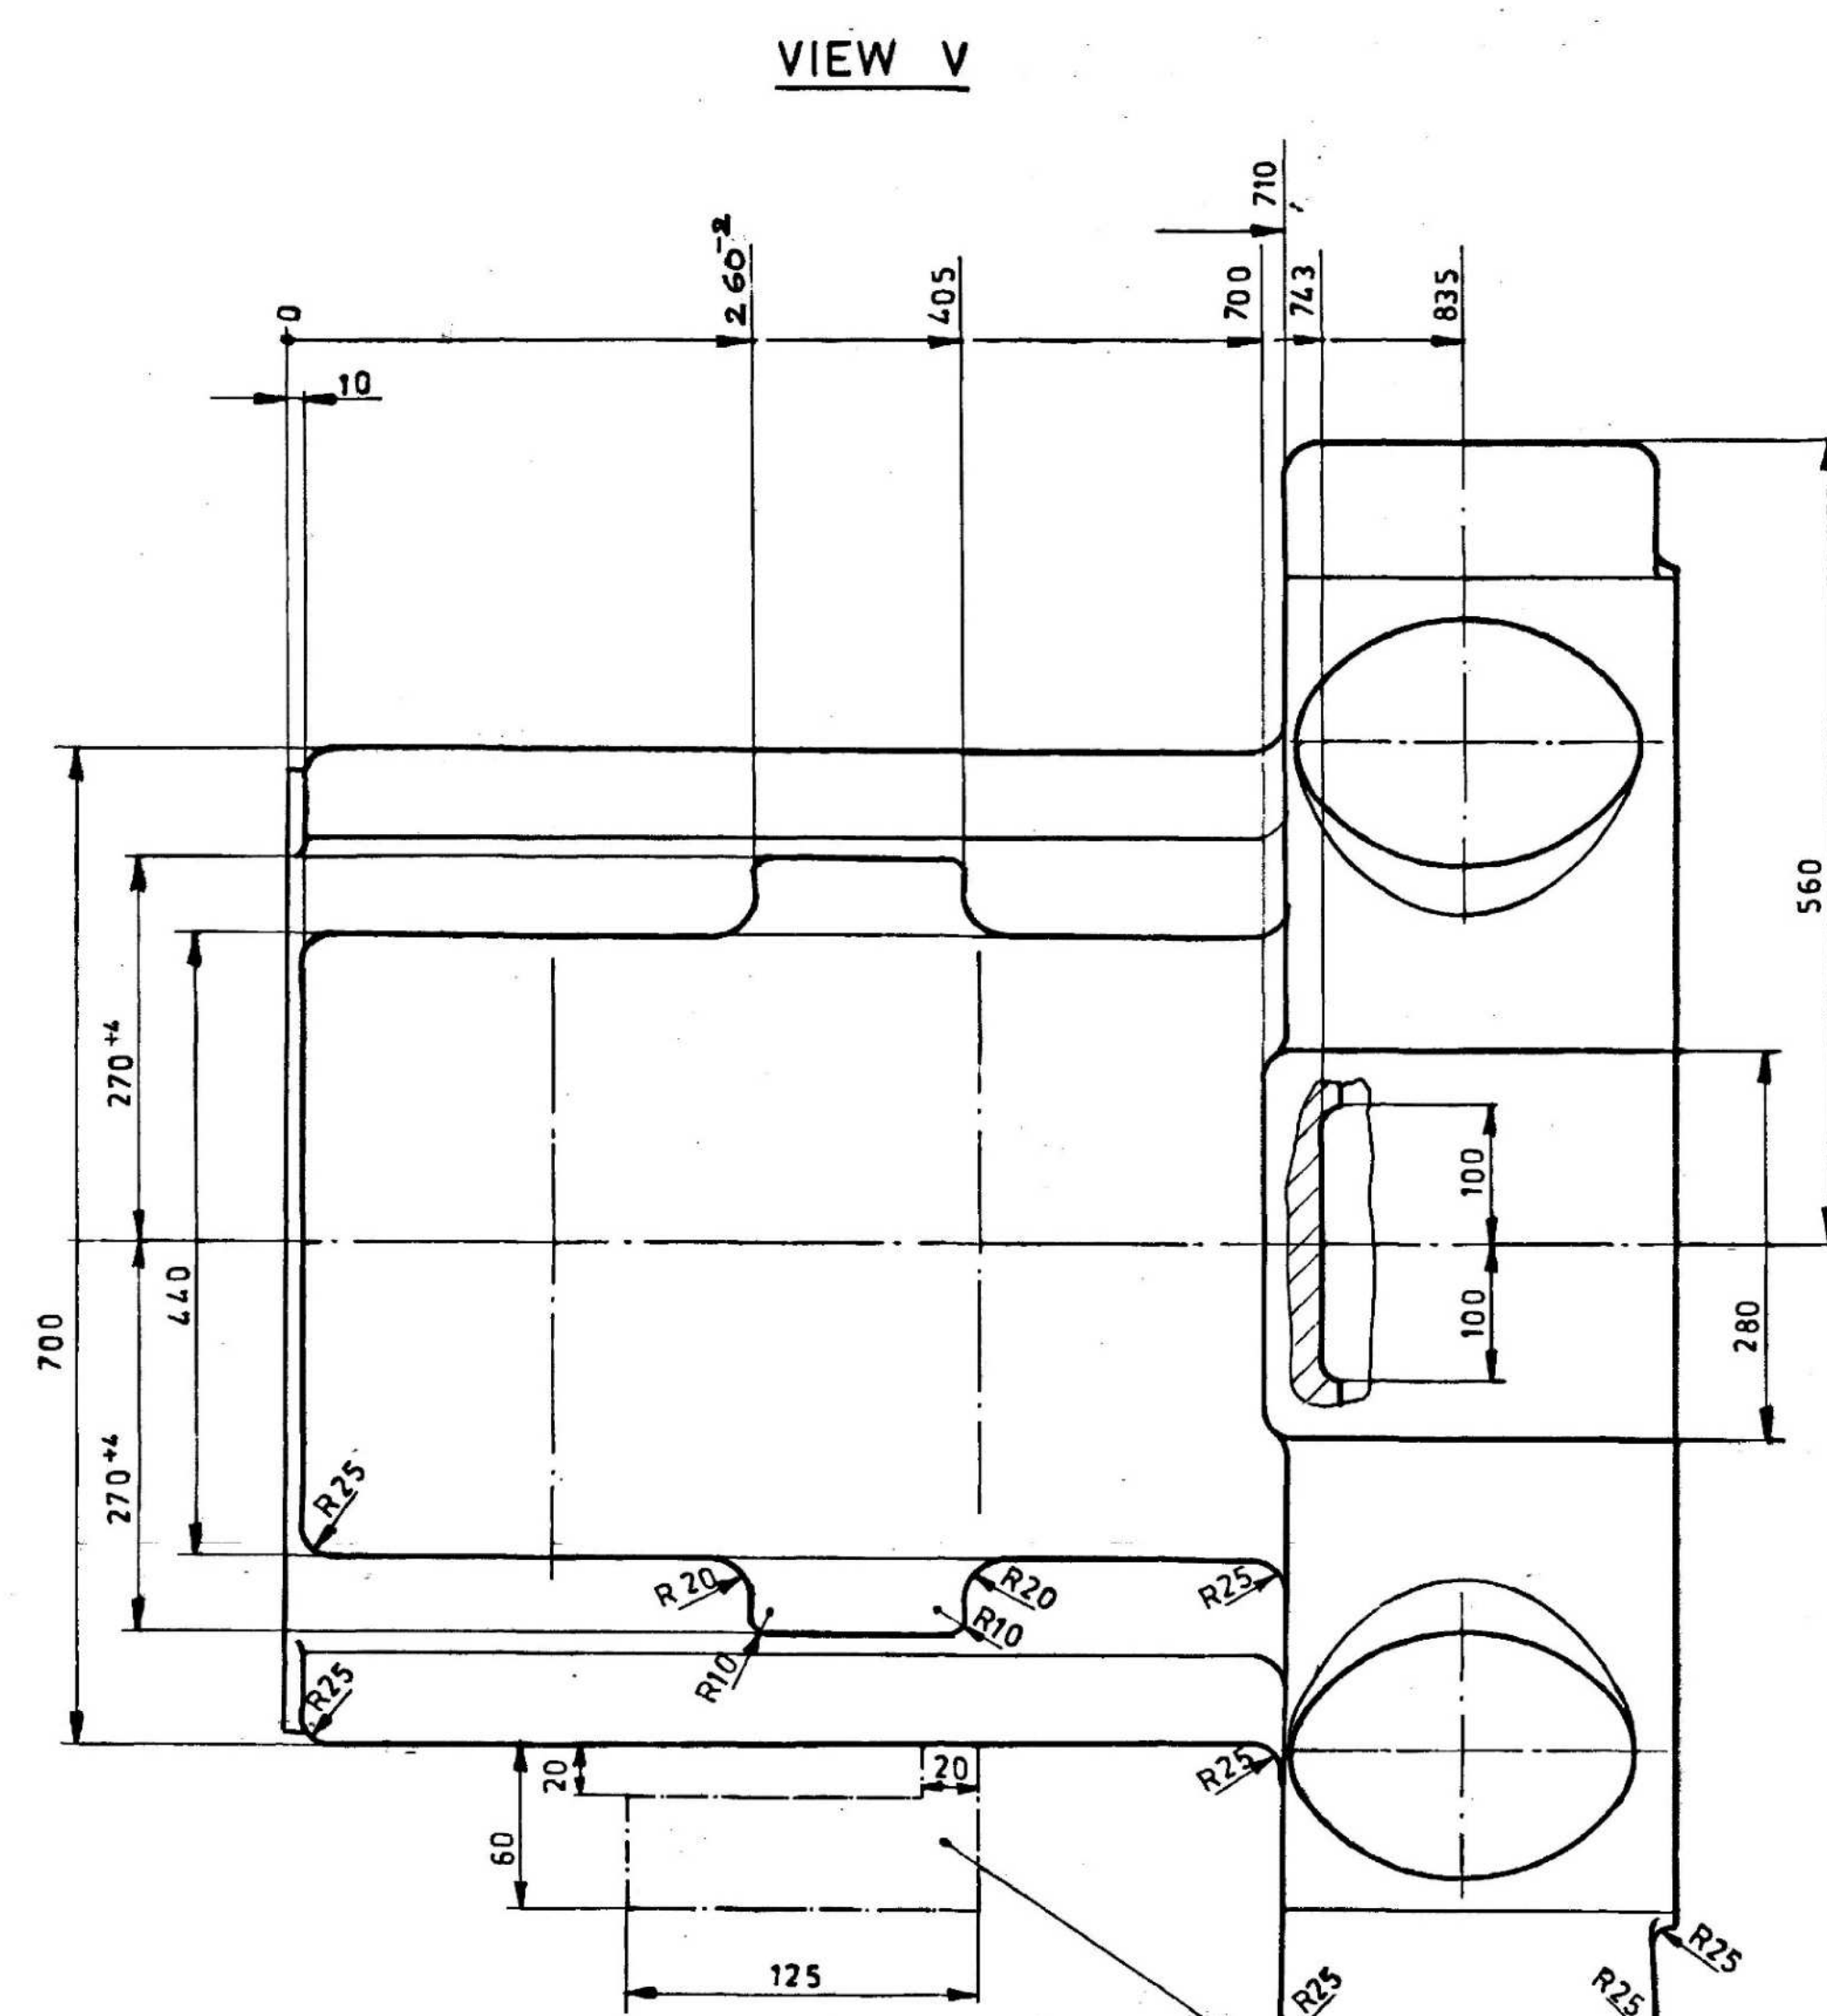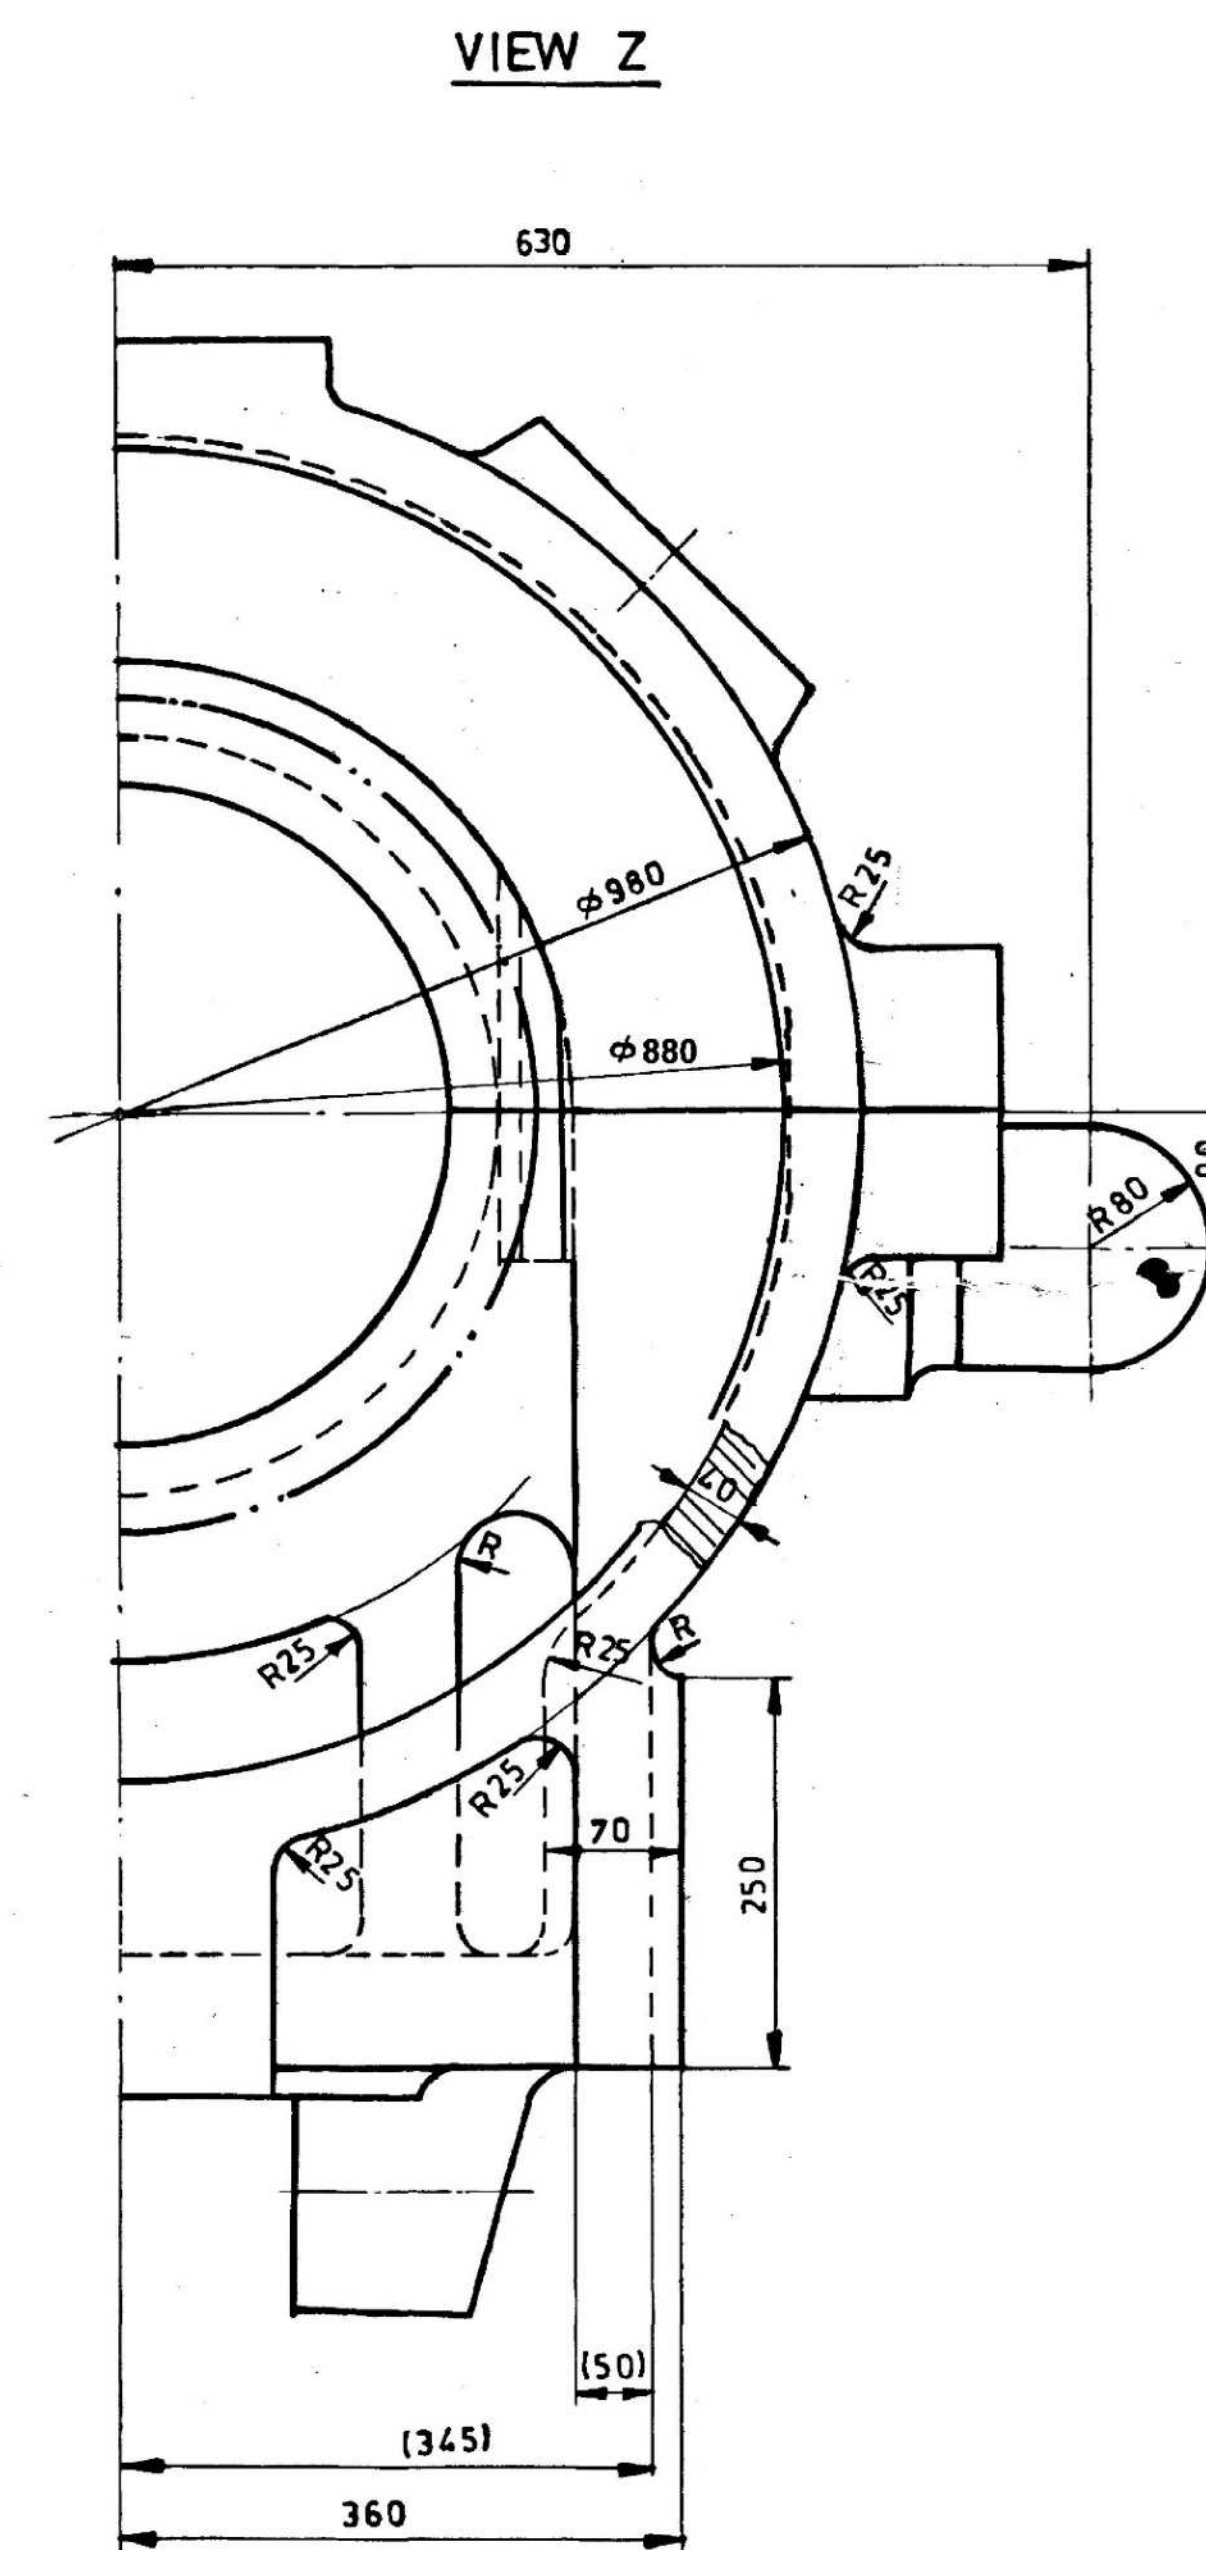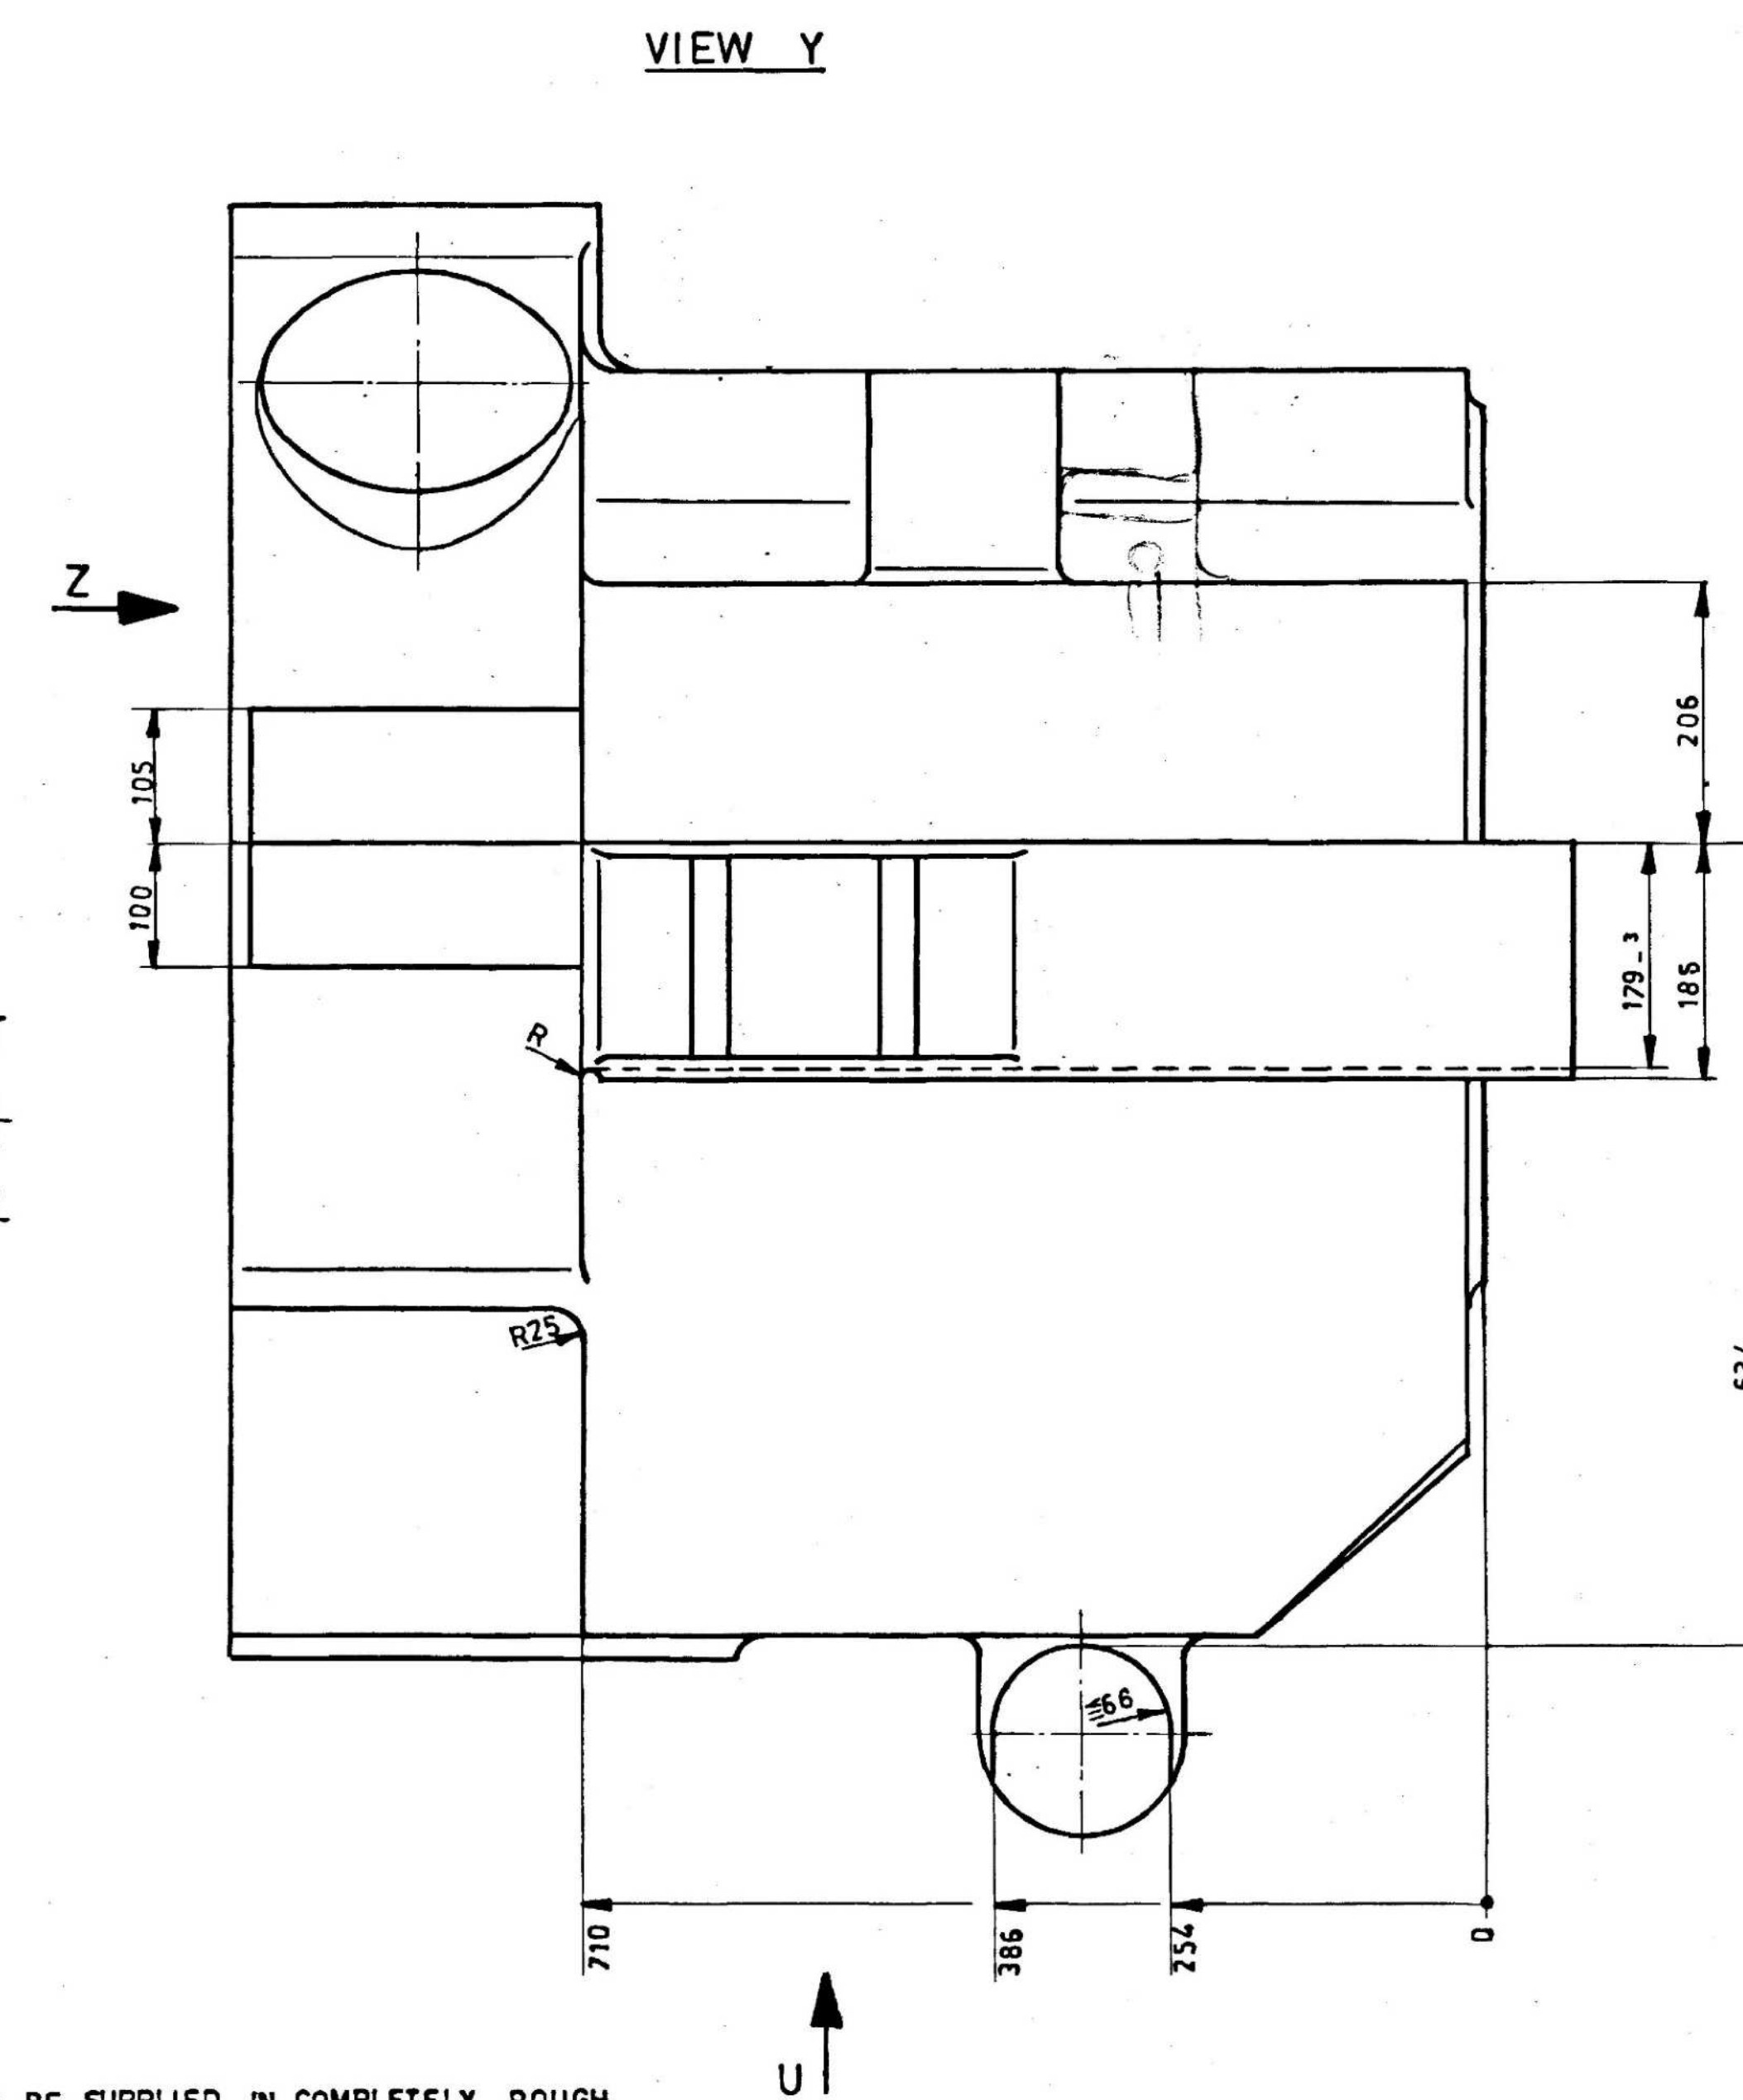


LP	4, 11, 13	TC9216921757	1472	HY19569	-13
UP	3, 10, 12	TC9216921749	982		-12
LP	4, 6				-11
UP	3, 5				-10
LP	4, 6, 8, 9				-09
UP	3, 5				-08
LP	4, 6, 7, 8, 9				-07
UP	3, 5				-06
LP	4	TC9214921498	1390	GS - C 25	-05
UP	3	TC9214921480	900	GS - C 25	-04
LP	4, 8, 9				-03
UP	3				-02
LP	4, 7, 8, 9		14 00		-01
UP	3		90		-00
POSITION	CONSISTS OF	CODE	WT / X	MATERIAL	VARIATION


REV	DATE	ALTERED CHECKED	REV	DATE	ALTERED CHECKED	REV	DATE	ALTERED CHECKED
ZONE			ZONE			ZONE		

		BHARAT HEAVY ELECTRICALS. LTD. CENTRAL FOUNDRY FORCE PLANT RANIPUR HARDWARE					
DEPTT.	FDY. TECH.	 	SCALE	U.T.S.	WEIGHT	NAME	SIGN
BEARING HOUSING 80 BZ					DRN		
					WRO	LAVIN	
					CHD	S. L. LAKRA	
					APPD	T. DAVE	
PROJECT AND CUSTOMER NAME		TECHNOLOGY NO.		DRAWING NO - 0302-05 10003/S NO OFF SHEET			


SECTION A-A S:1:16

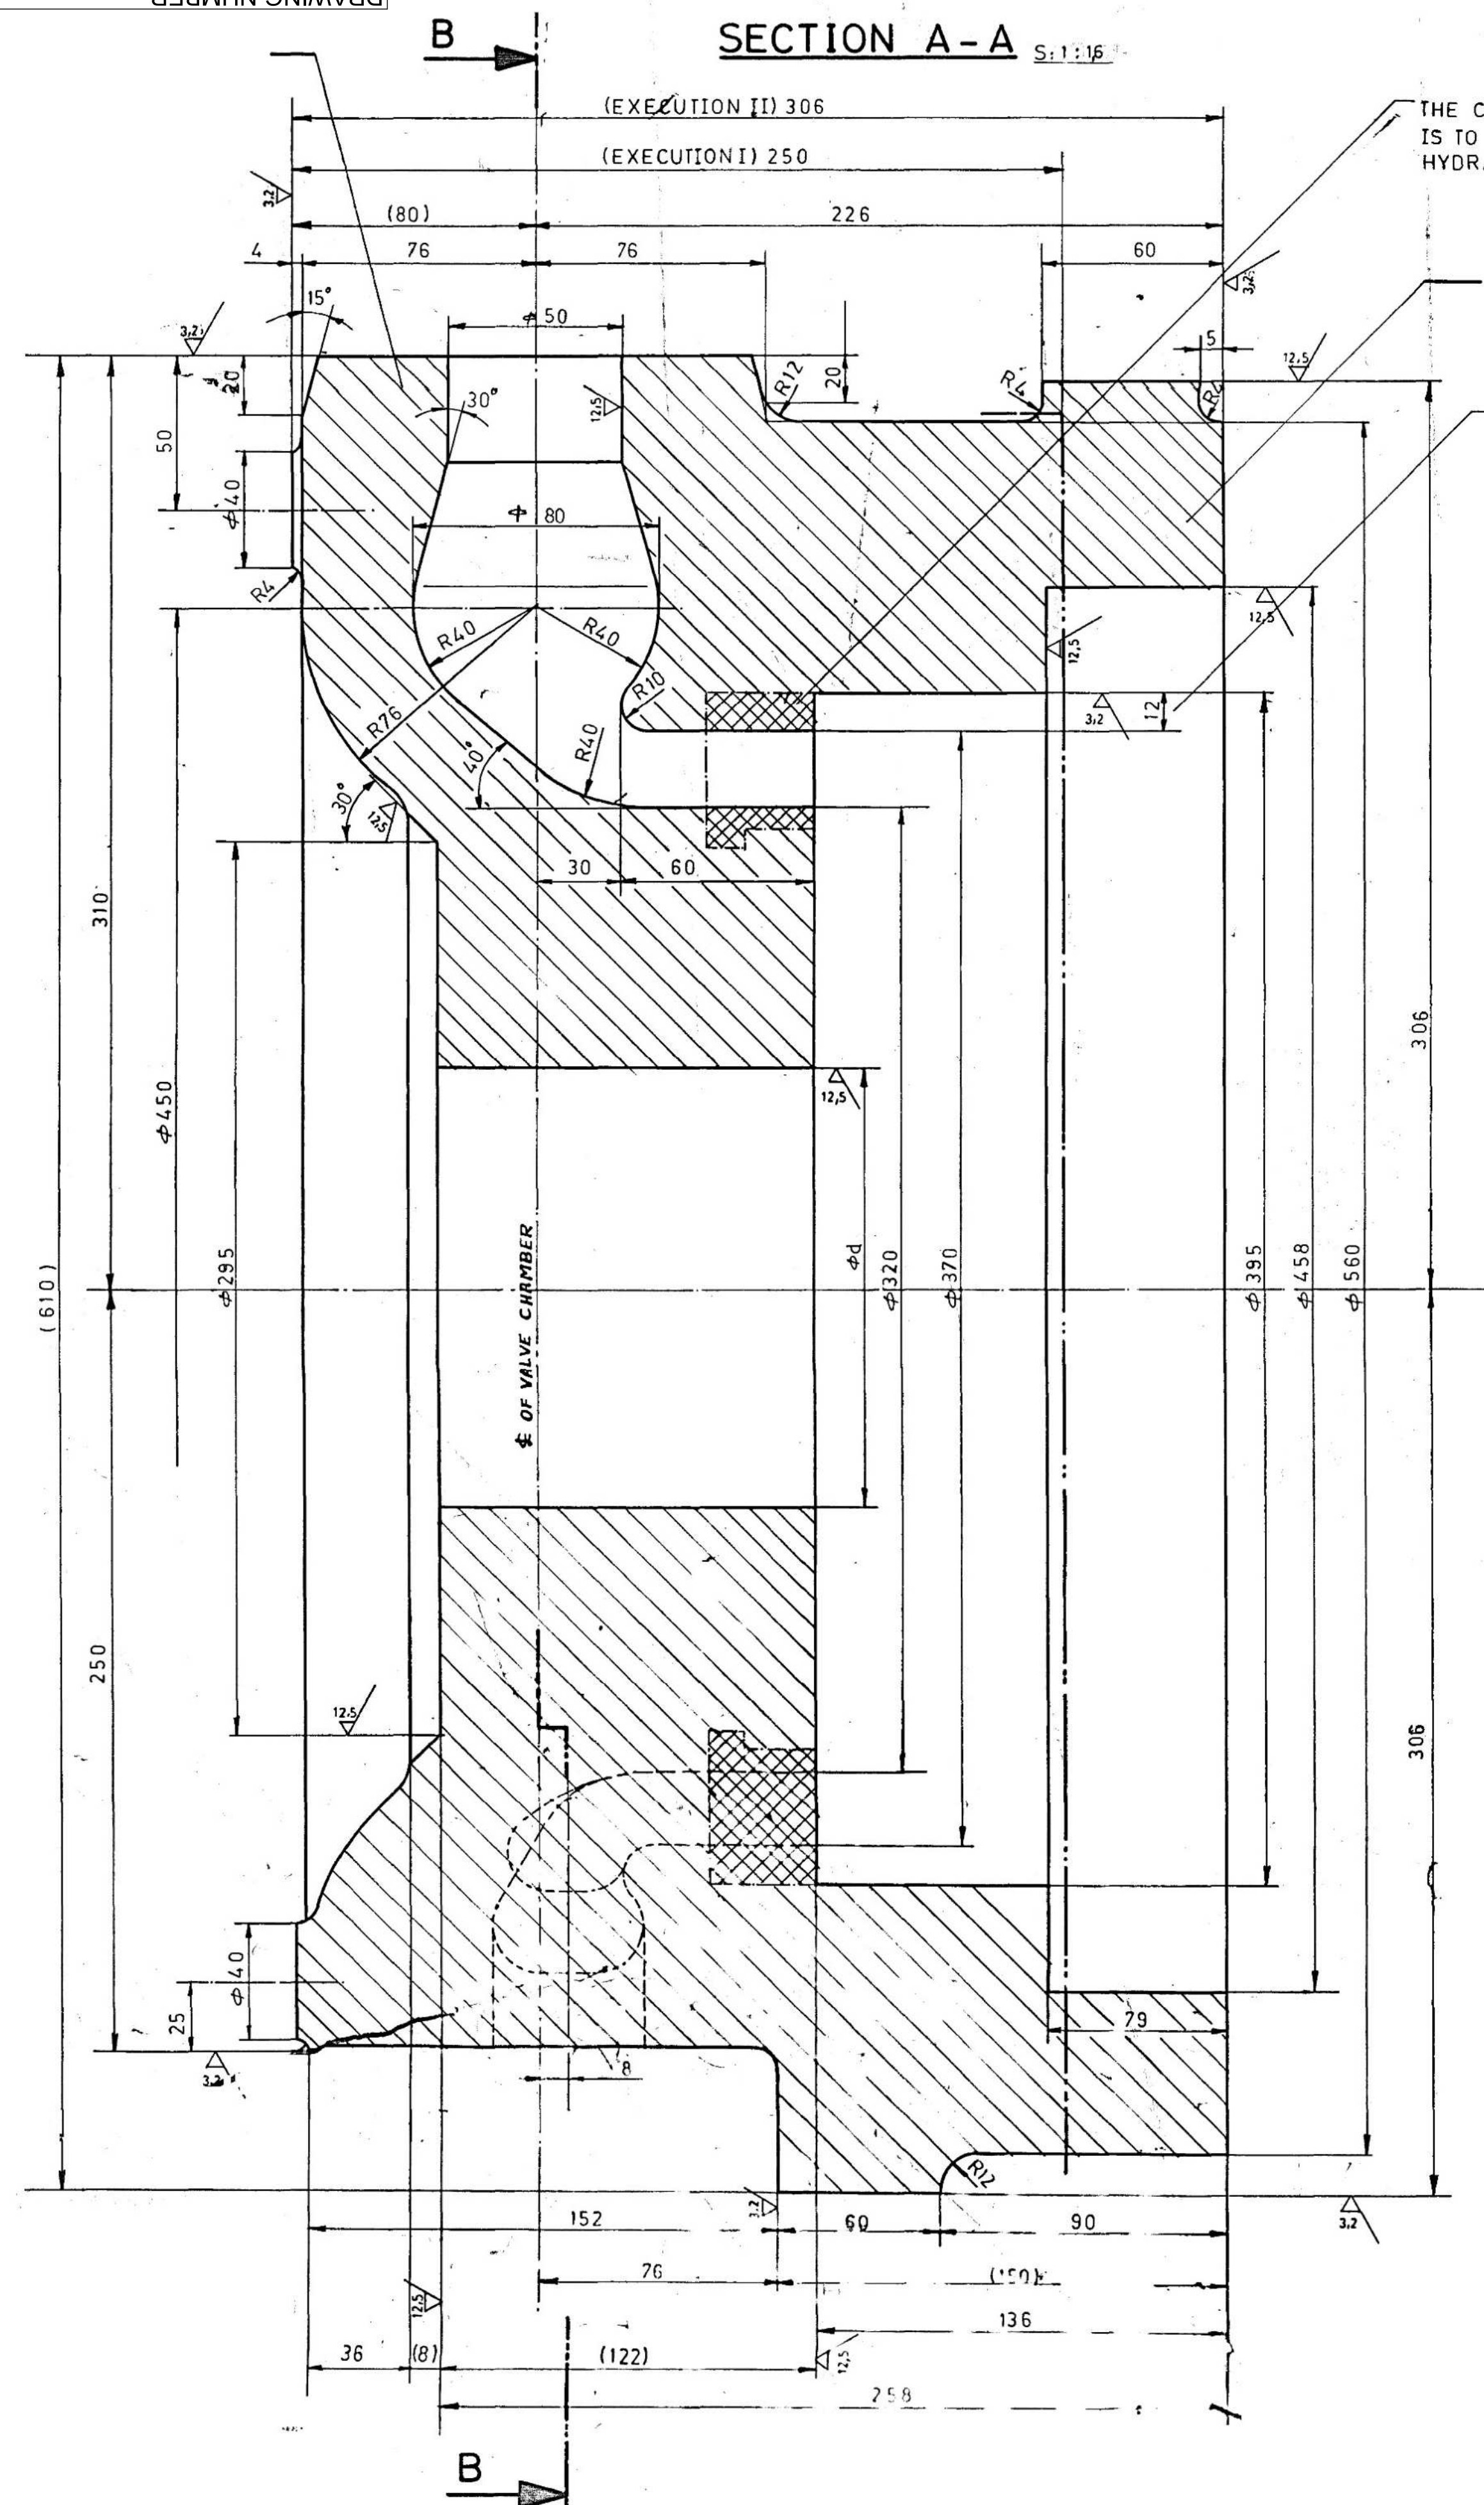


SECTION B-B S:1:16

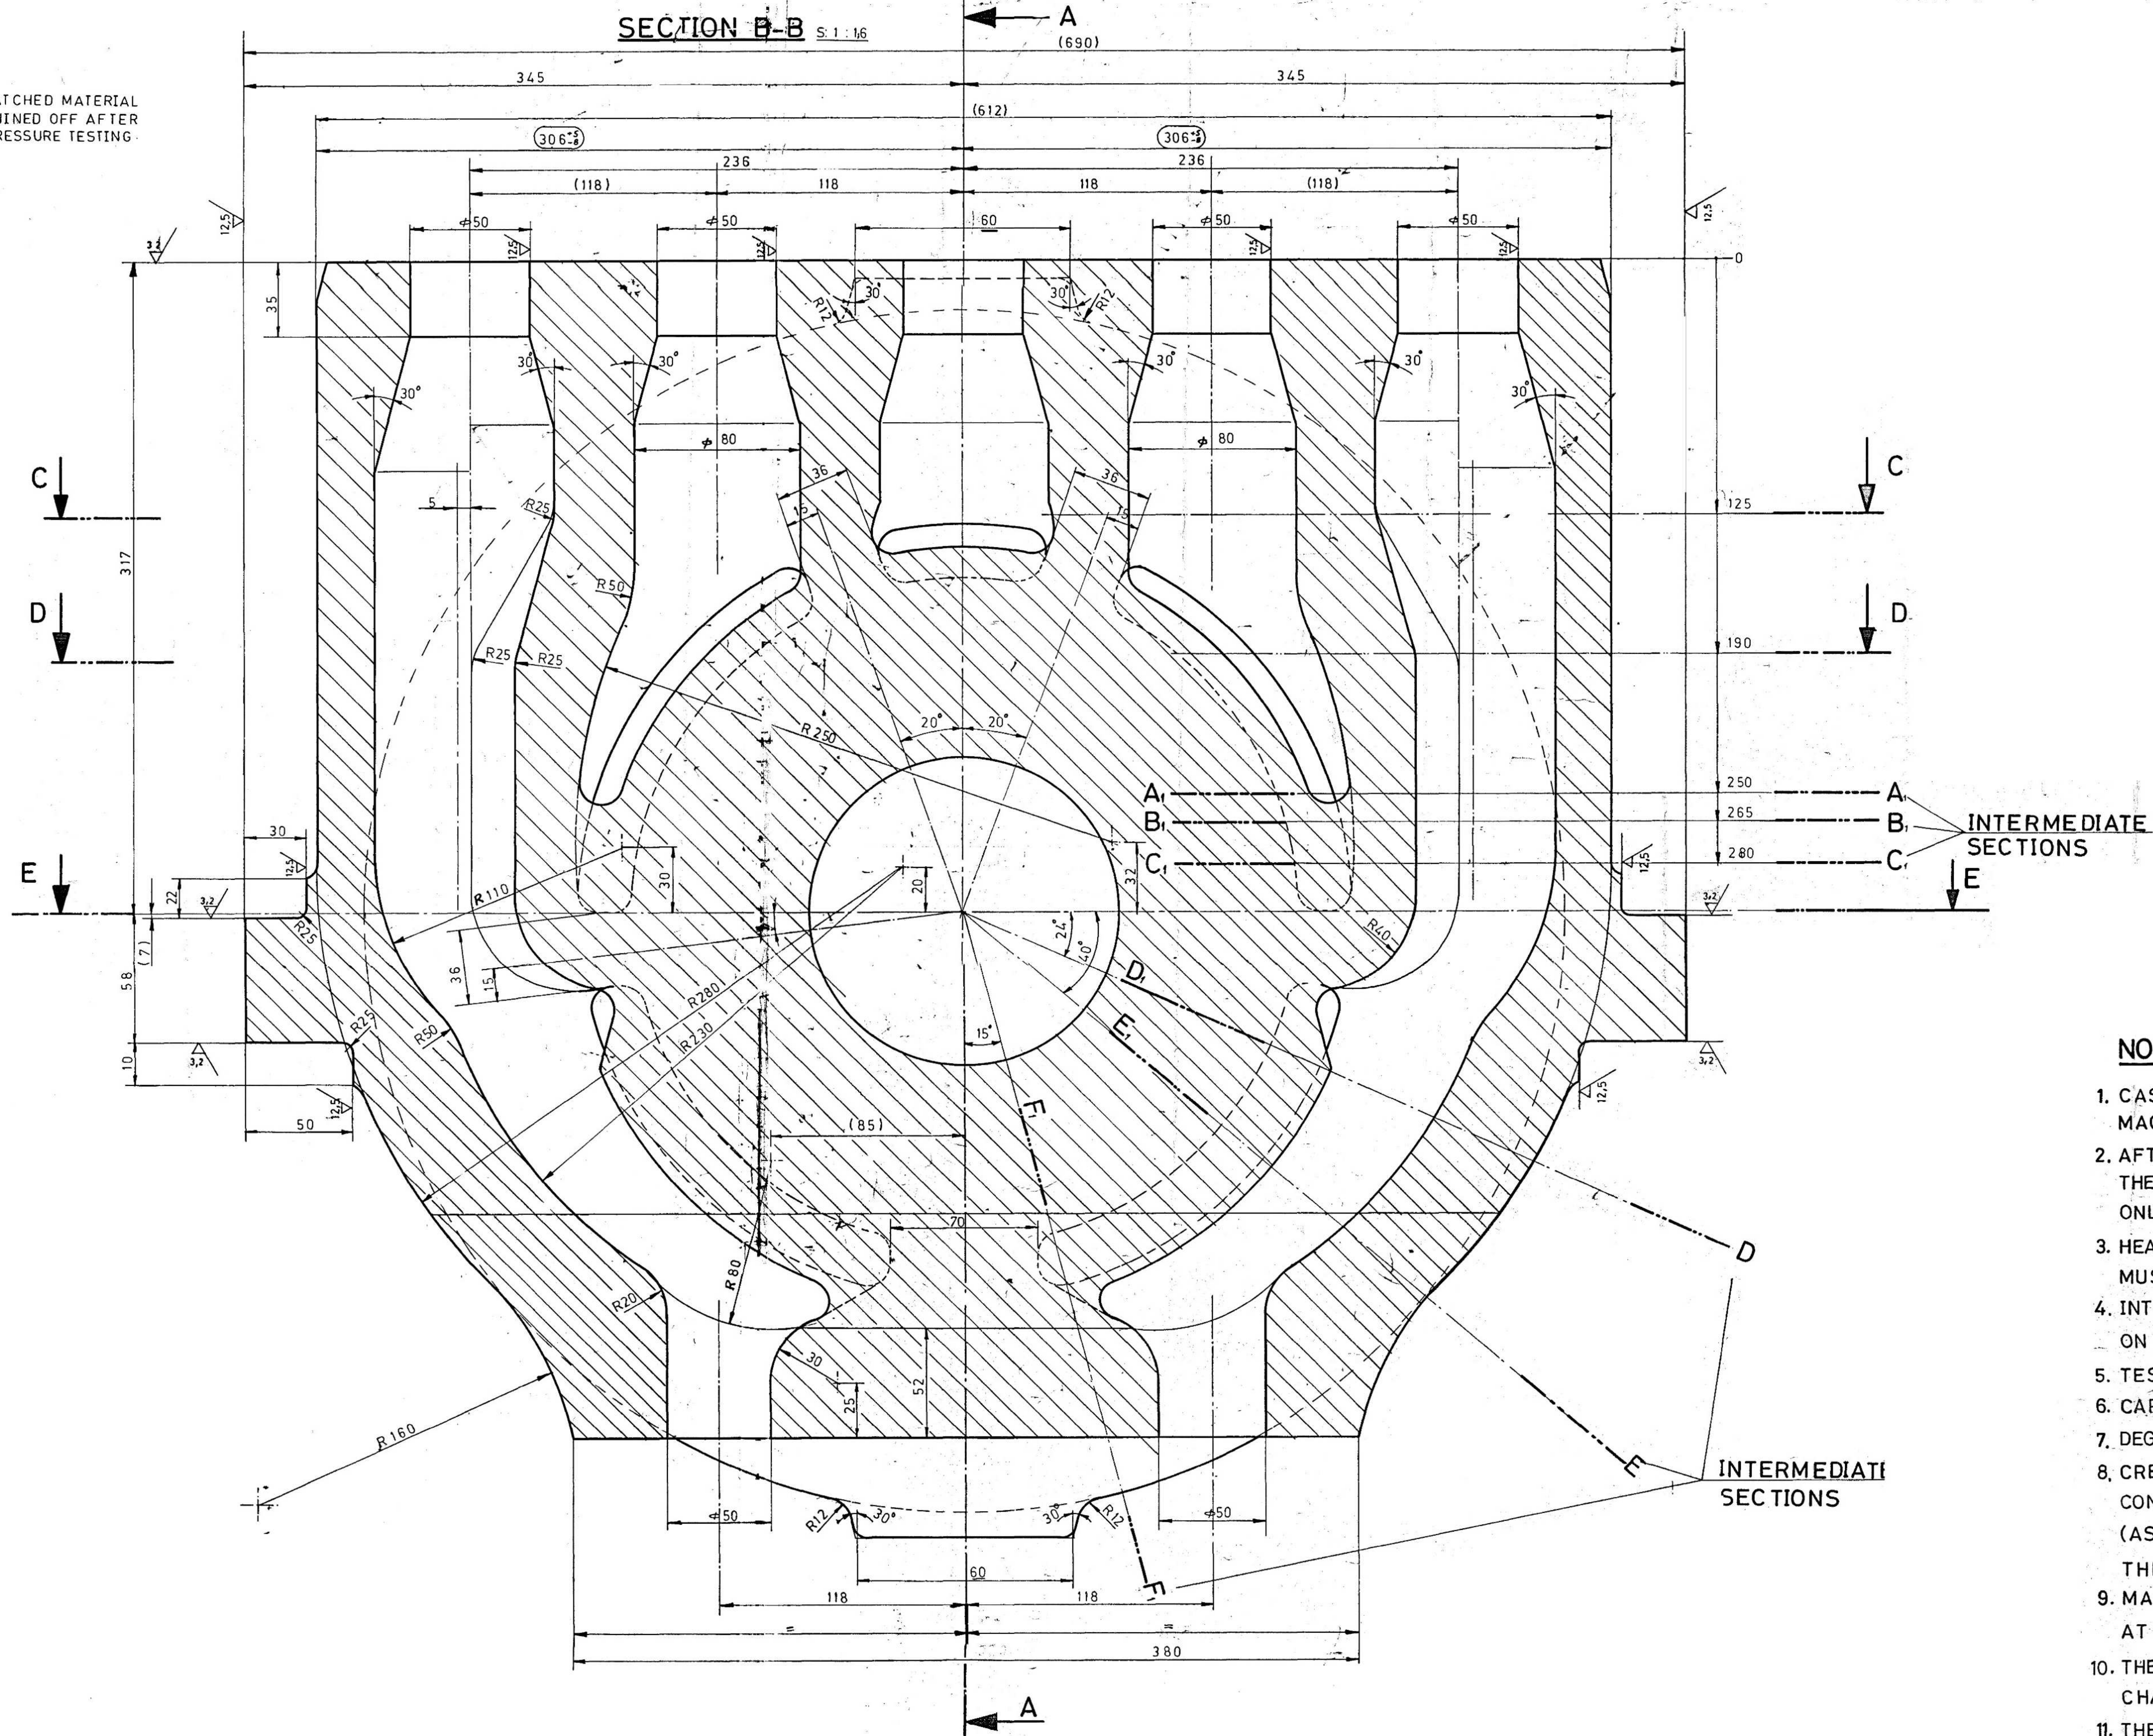

SECTION D-D

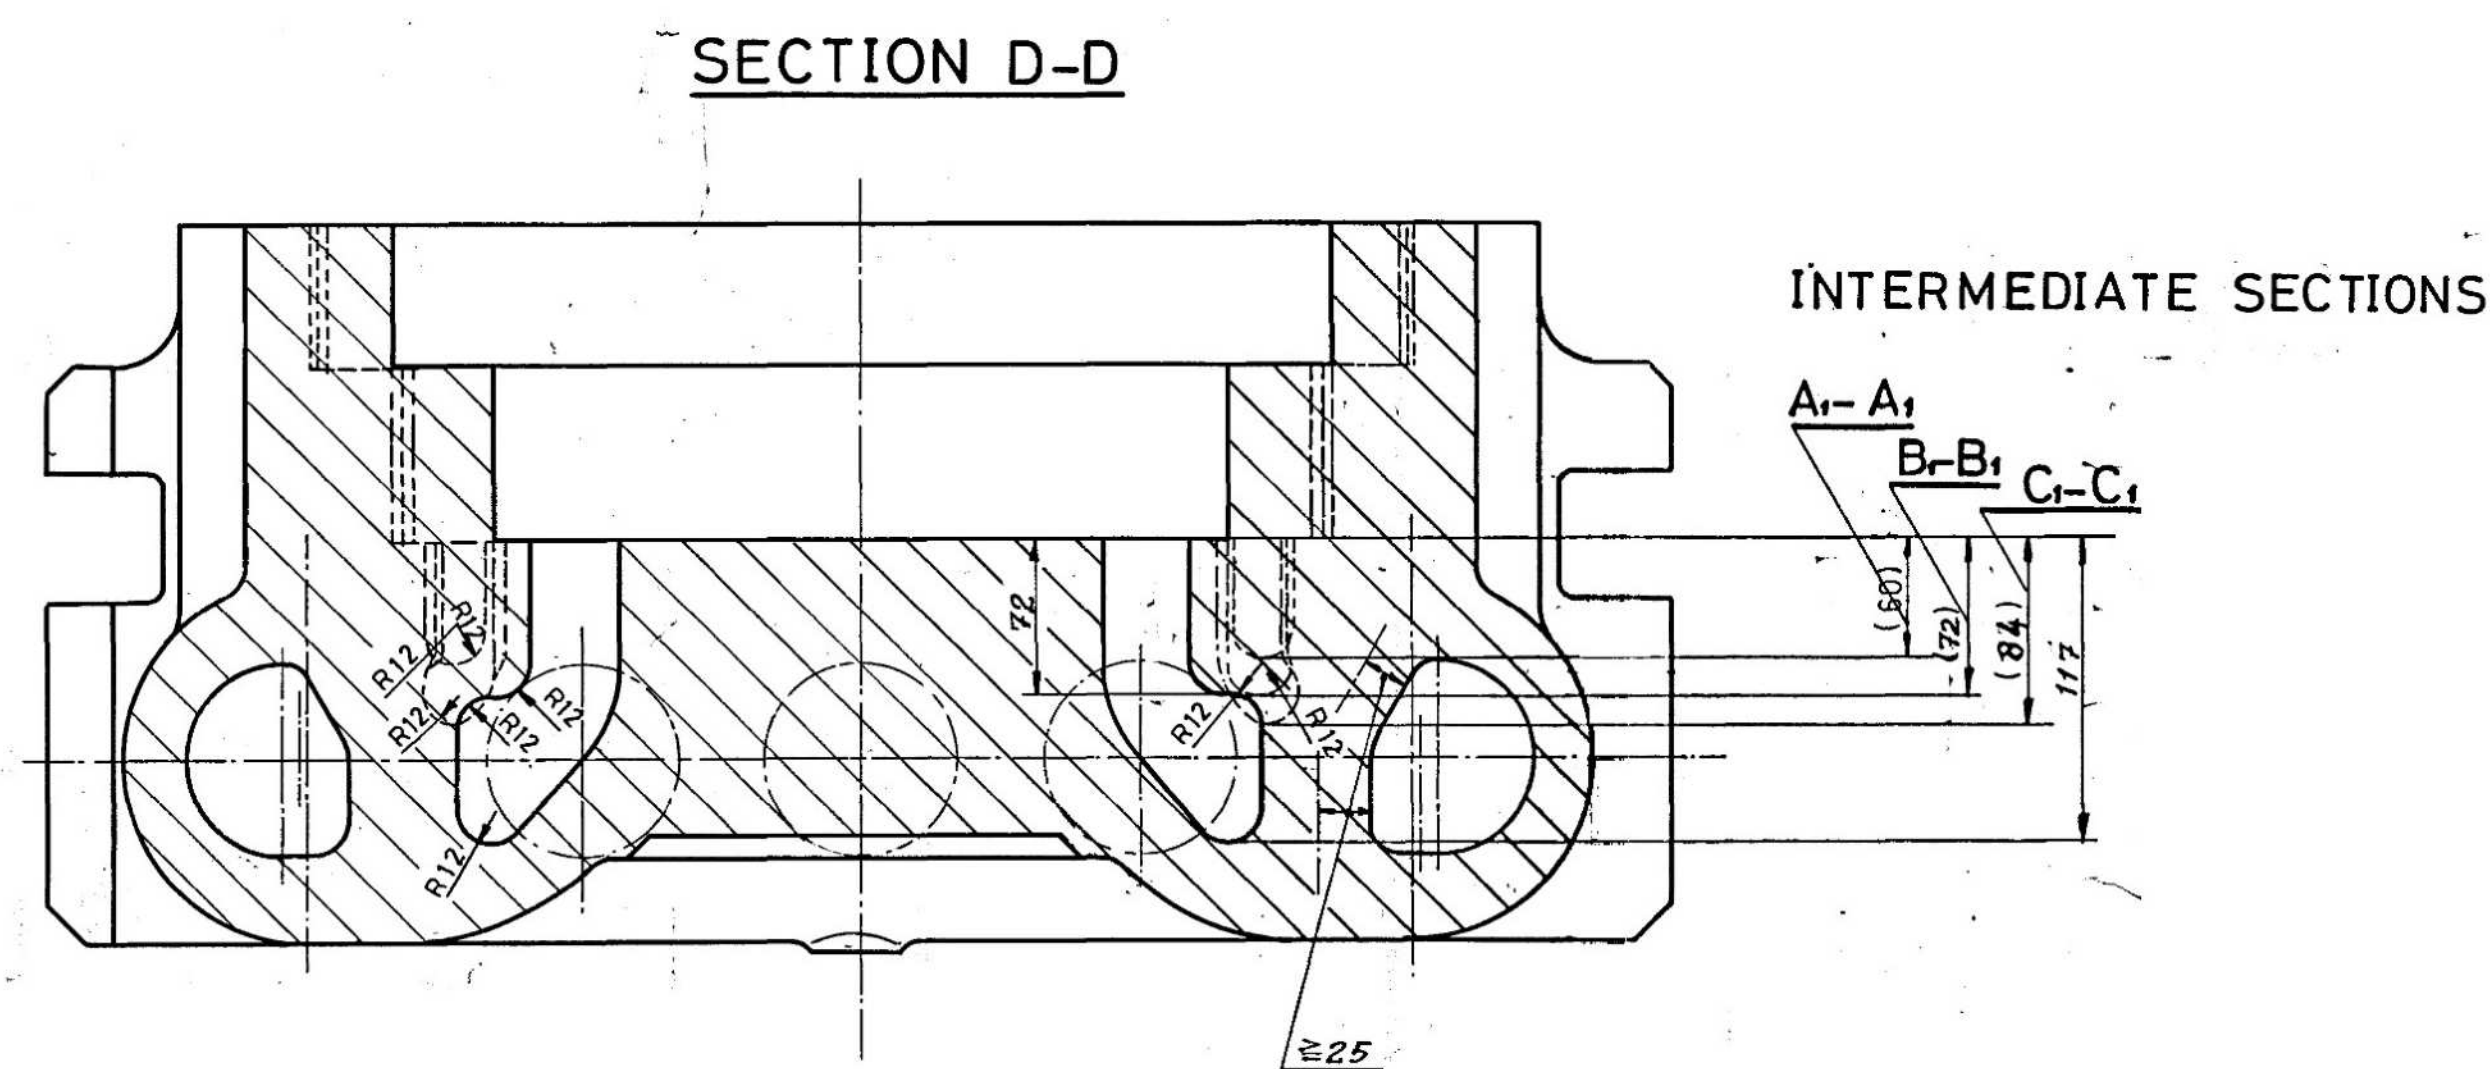

SECTION E-E

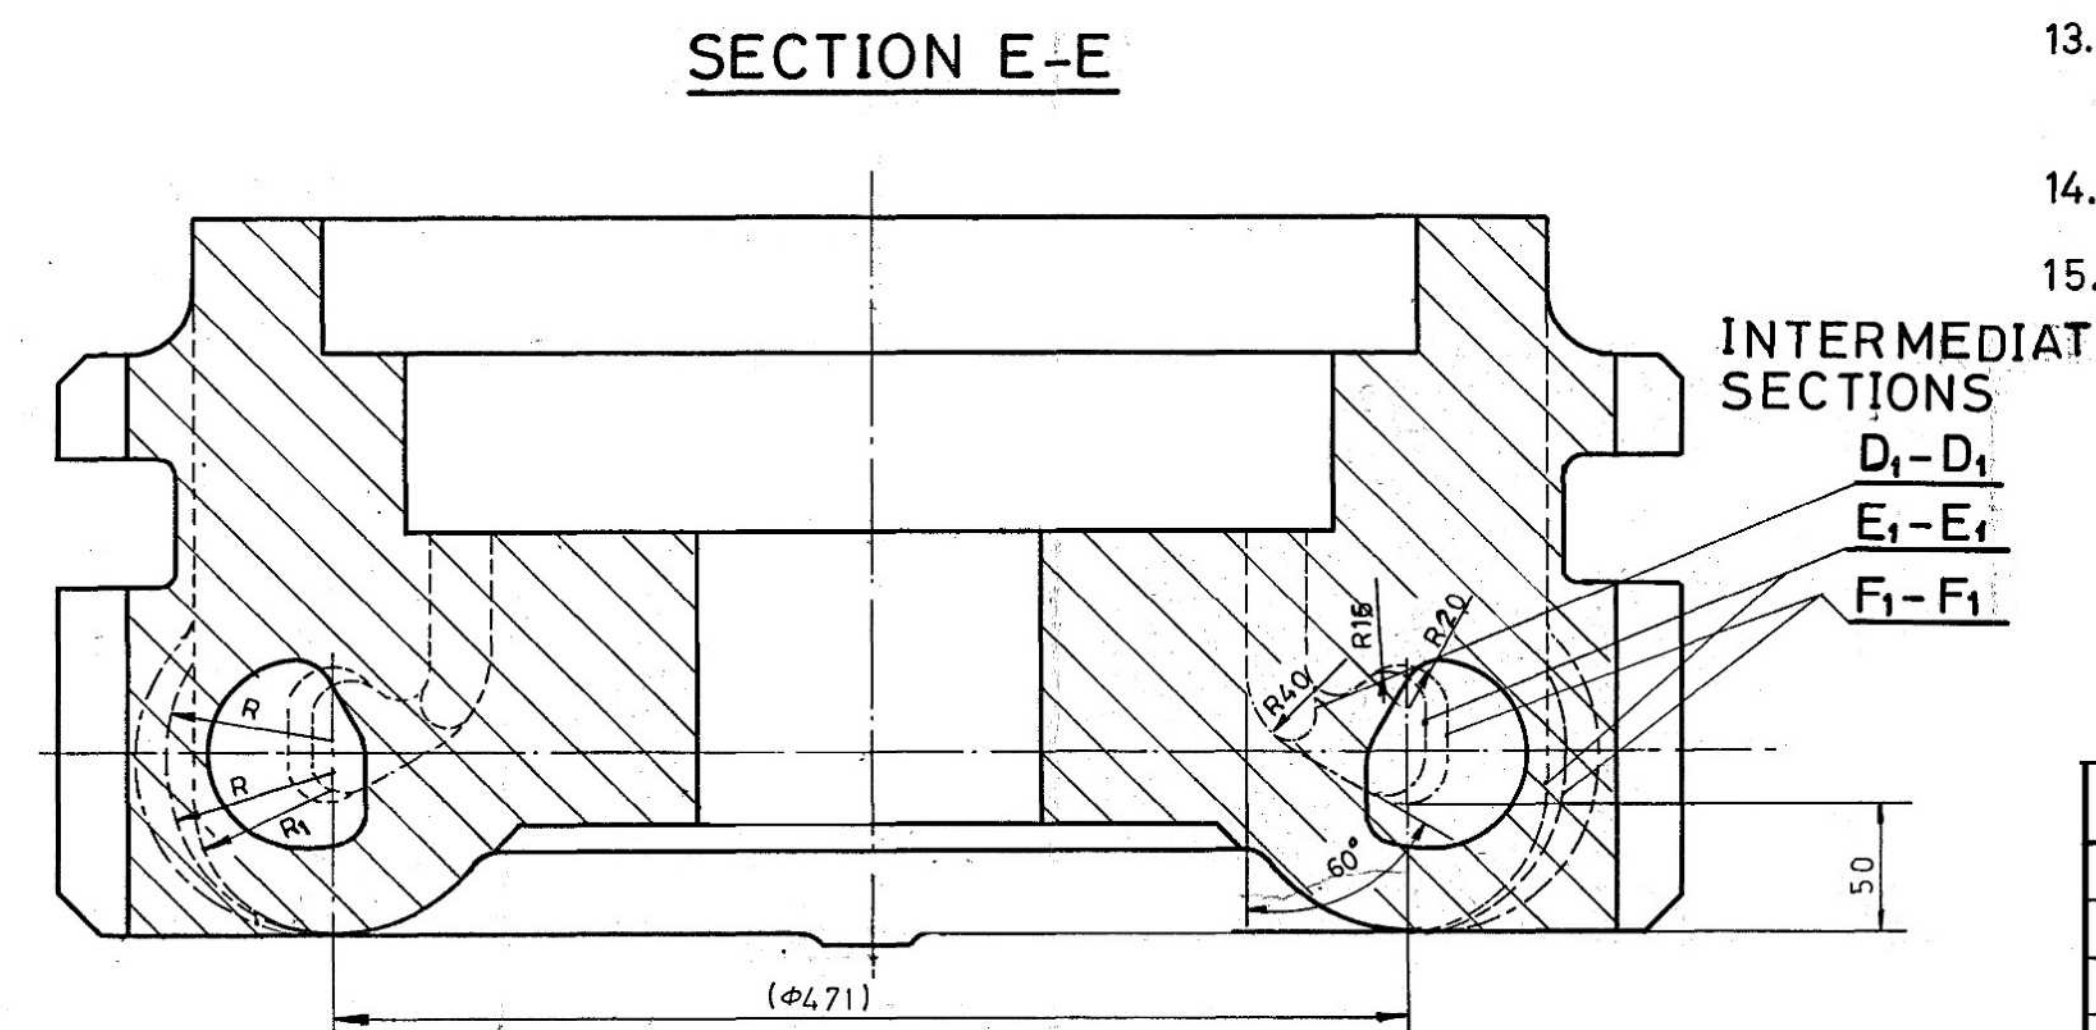

NOTES:-

1. CASTING TO BE SUPPLIED IN COMPLETELY ROUGH MACHINED CONDITION AS PER TDC-0100/75
2. AFTER ROUGH MACHINING AND HEAT-TREATMENT THE CASTING SHOULD BE COMPLETELY FREE FROM ONLY RESIDUAL INTERNAL STRESSES.
3. HEAT TREATMENT PROCESS ACTUALLY FOLLOWED MUST BE SUBMITTED WITH DIAGRAM.
4. INTEGRAL KEEL BLOCKS ARE TO BE PROVIDED ON ON THE CASTING AS SHOWN.
5. TESTS ARE TO BE CARRIED OUT AS PER TDC-0100/75
6. CARRYOUT X RAY TEST AS PER TDC-0100/75.
7. DEGREE OF ACCURACY OF CASTING AS PER DIN1683/B
8. CREEP PROPERTIES FOR THE CASTING MATERIAL CONFORMING TO DIN MATERIAL SPECIFICATION (AS PER ORDER) SHOULD BE GUARANTEED BY THE SUPPLIER.
9. MARKINGS AS PER TDC 0100/75 TO BE MADE AT AT PLACES SHOWN THUS.....
10. THE SUPPLIED CASTING SHOULD NOT CONTAIN ANY CHAPLETS AND CHILLS.
11. THE GIVEN DIMENSIONS ARE WITHOUT ANY MACHINING ALLOWANCE.
12. ALLOWANCE FOR ROUGH MACHINING FOR DIMENSIONS UP TO 500mm = 3 ± 1 OVER 500mm = 4 ± 2 .
13. DIMENSIONS MARKED THUS ARE TO BE MAINTAINED BY MACHINING IF NECESSARY.
14. ADDITIONAL LOOSE PATTERN PIECES.
15. UNMENTIONED RADII R = 10mm.

PATTERN No. FOR POS. 1. 5-8934-0024-00
PATTERN No. FOR POS. 2. 5-8934-0025-00

I	1	210	HY19573	06
I	1	140	HY19573	-05
II	1.2	180		-04
II	1.2	245		-03
II	1.2	140		-02
I	1	245		-01
I	1	140		-00
EXECUTION	Pos.	Ø d	MATERIAL	VAR.

QTY	NO.	UNIT	DESCRIPTION	ITEM	DRAWING NO.	ITEM	MATERIAL CODE	ITEM	MATERIAL SPEC.	QTY	UNIT
VAR.	ANT	QTY	QTY	QTY	QTY	QTY	QTY	QTY	QTY	QTY	QTY

DEPT.	SCALE	WEIGHT	NAME	SIGN	DATE
DEPT. TECH.	N.T.S.				

TITLE	INNER CASING (BZ)
PROJECT AND CUSTOMER NAME	TECHNOLOGY NO. 00000

DRAWING NO. 0-301-02-10008/S
SHEET NO. 1 OF 2

REV	DATE	ALTERED	REV	DATE	ALTERED	REV	DATE	ALTERED
ZONE		CHECKED	ZONE		CHECKED	ZONE		CHECKED

Q OF VALVE CHAMBER

SECTION - GG


- 1 CASTING TO BE SUPPLIED IN COMPLETELY ROUGH MACHINED CONDITION AS PER TDC -0100/75.
2. AFTER ROUGH MACHINING AND HEAT-TREATMENT THE CASTING SHOULD BE COMPLETELY FREE FROM ANY RESIDUAL INTERNAL STRESSES.
3. HEAT-TREATMENT PROCESS ACTUALLY FOLLOWED MUST BE SUBMITTED WITH DIAGRAM.
4. INTEGRAL KEEL BLOCKS ARE TO BE PROVIDED ON THE CASTING AS SHOWN.
5. TESTS ARE TO BE CARRIED OUT AS PER TDC - 0100/75.
6. CARRYOUT X-RAY TEST AS PER TDC - 0100/75.
7. DEGREE OF ACCURACY OF CASTING AS PER DIN 1683/B.
8. CREEP PROPERTIES FOR THE CASTING MATERIAL CONFORMING TO DIN MATERIAL SPECIFICATION (AS PER ORDER) SHOULD BE GUARANTEED BY THE SUPPLIER.
9. MARKINGS AS PER TDC 0100/75 TO BE MADE AT PLACES SHOWN THUS.... 
10. TO BE HYDRAULICALLY PRESSURE TESTED AT BHEL WORKS.
TEST PRESSURE=467 ATG

VIEW V


VIEW 0

UG 64 62 63		31		22		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100		101		102		103		104		105		106		107		108		109		110		111		112		113		114		115		116		117		118		119		120		121		122		123		124		125		126		127		128		129		130		131		132		133		134		135		136		137		138		139		140		141		142		143		144		145		146		147		148		149		150		151		152		153		154		155		156		157		158		159		160		161		162		163		164		165		166		167		168		169		170		171		172		173		174		175		176		177		178		179		180		181		182		183		184		185		186		187		188		189		190		191		192		193		194		195		196		197		198		199		200		201		202		203		204		205		206		207		208		209		210		211		212		213		214		215		216		217		218		219		220		221		222		223		224		225		226		227		228		229		230		231		232		233		234		235		236		237		238		239		240		241		242		243		244		245		246		247		248		249		250		251		252		253		254		255		256		257		258		259		260		261		262		263		264		265		266		267		268		269		270		271		272		273		274		275		276		277		278		279		280		281		282		283		284		285		286		287		288		289		290		291		292		293		294		295		296		297		298		299		300		301		302		303		304		305		306		307		308		309		310		311		312		313		314		315		316		317		318		319		320		321		322		323		324		325		326		327		328		329		330		331		332		333		334		335		336		337		338		339		340		341		342		343		344		345		346		347		348		349		350		351		352		353		354		355		356		357		358		359		360		361		362		363		364		365		366		367		368		369		370		371		372		373		374		375		376		377		378		379		380		381		382		383		384		385		386		387		388		389		390		391		392		393		394		395		396		397		398		399		400		401		402		403		404		405		406		407		408		409		410		411		412		413		414		415		416		417		418		419		420		421		422		423		424		425		426		427		428		429		430		431		432		433		434		435		436		437		438		439		440		441		442		443		444		445		446		447		448		449		450		451		452		453		454		455		456		457		458		459		460		461		462		463		464		465		466		467		468		469		470		471		472		473		474		475		476		477		478		479		480		481		482		483		484		485		486		487		488		489		490		491		492		493		494		495		496		497		498		499		500		501		502		503		504		505		506		507		508		509		510		511		512		513		514		515		516		517		518		519		520		521		522		523		524		525		526		527		528		529		530		531		532		533		534		535		536		537		538		539		540		541		542		543		544		545		546		547		548		549		550		551		552		553		554		555		556		557		558		559		560		561		562		563		564		565		566		567		568		569		570		571		572		573		574		575		576		577		578		579		580		581		582		583		584		585		586		587		588		589		590		591		592		593		594		595		596		597		598		599		600		601		602		603		604		605		606		607		608		609		610		611		612		613		614		615		616		617		618		619		620		621		622		623		624		625		626		627		628		629		630		631		632		633		634		635		636		637		638		639		640		641		642		643		644		645		646		647		648		649		650		651		652		653		654		655		656		657		658		659		660		661		662		663		664		665		666		667		668		669		670		671		672		673		674		675		676		677		678		679		680		681		682		683		684		685		686		687		688		689		690		691		692		693		694		695		696		697		698		699		700		701		702		703		704		705		706		707		708		709		710		711		712		713		714		715		716		717		718		719		720		721		722		723		724		725		726		727		728		729		730		731		732		733		734		735		736		737		738		739		740		741		742		743		744		745		746		747		748		749		750		751		752		753		754		755		756		757		758		759		760		761		762		763		764		765		766		767		768		769		770		771		772		773		774		775		776		777		778		779		780		781		782		783		784		785		786		787		788		789		790		791		792		793		794		795		796		797		798		799		800		801		802		803		804		805		806		807		808		809		810		811		812		813		814		815		816		817		818		819		820		821		822		823		824		825		826		827		828		829		830		831		832		833		834		835		836		837		838		839		840		841		842		843		844		845		846		847		848		849		850		851		852		853		854		855		856		857		858		859		860		861		862		863		864		865		866		867		868		869		870		871		872		873		874		875		876		877		878		879		880		881		882		883		884		885		886		887		888		889		890		891		892		893		894		895		896		897		898		899		900		901		902		903		904		905		906		907		908		909		910		911		912		913		914		915		916		917		918		919		920		921		922		923		924		925		926		927		928		929		930		931		932		933		934		935		936		937		938		939		940		941		942		943		944		945		946		947		948		949		950		951		952		953		954		955		956		957		958		959		960		961		962		963		964		965		966		967		968		969		970		971		972		973		974		975		976		977		978		979		980		981		982		983		984		985		986		987		988		989		990		991		992		993		994		995		996		997		998		999		1000		1001		1002		1003		1004		1005		1006		1007		1008		1009		1010		1011		1012		1013		1014		1015		1016		1017		1018		1019		1020		1021		1022		1023		1024		1025		1026		1027		1028		1029		1030		1031		1032		1033		1034		1035		1036		1037		1038		1039		1040		1041		1042		1043		1044		1045		1046		1047		1048		1049		1050		1051		1052		1053		1054		1055		1056		1057		1058		1059		1060		1061		1062		1063		1064		1065		1066		1067		1068		1069		1070		1071		1072		1073		1074		1075		1076		1077		1078		1079		1080		1081		1082		1083		1084		1085		1086		1087		1088		1089		1090		1091		1092		1093		1094		1095		1096		1097		1098		1099		1100		1101		1102		1103		1104		1105		1106		1107		1108		1109		1110		1111		1112		1113		1114		1115		1116		1117		1118		1119		1120		1121		1122		1123		1124		1125		1126		1127		1128		1129		1130		1131		1132		1133		1134		1135		1136		1137		1138		1139		1140		1141		1142		1143		1144		1145		1146</	
-------------	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	--------	--



SECTION-B-B

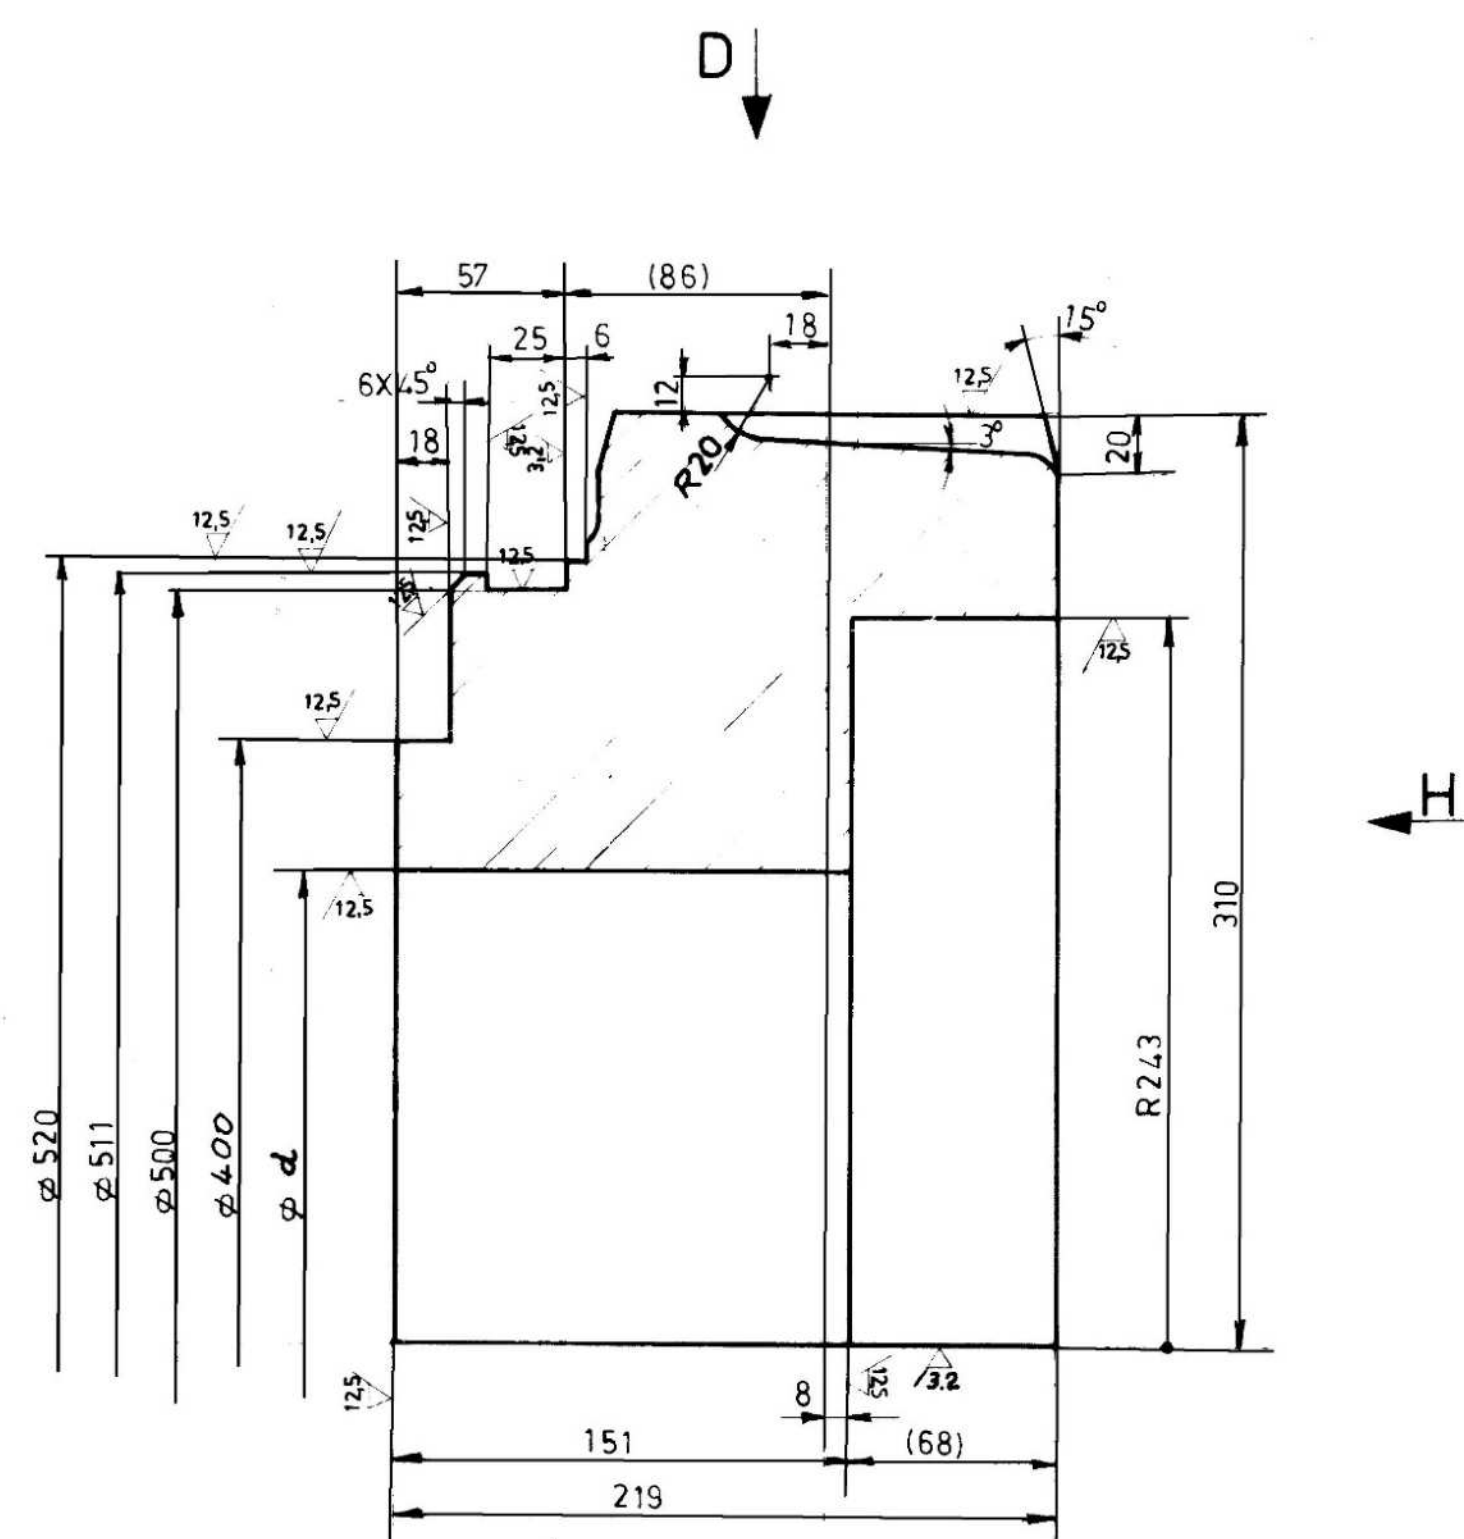

SECTION C-C

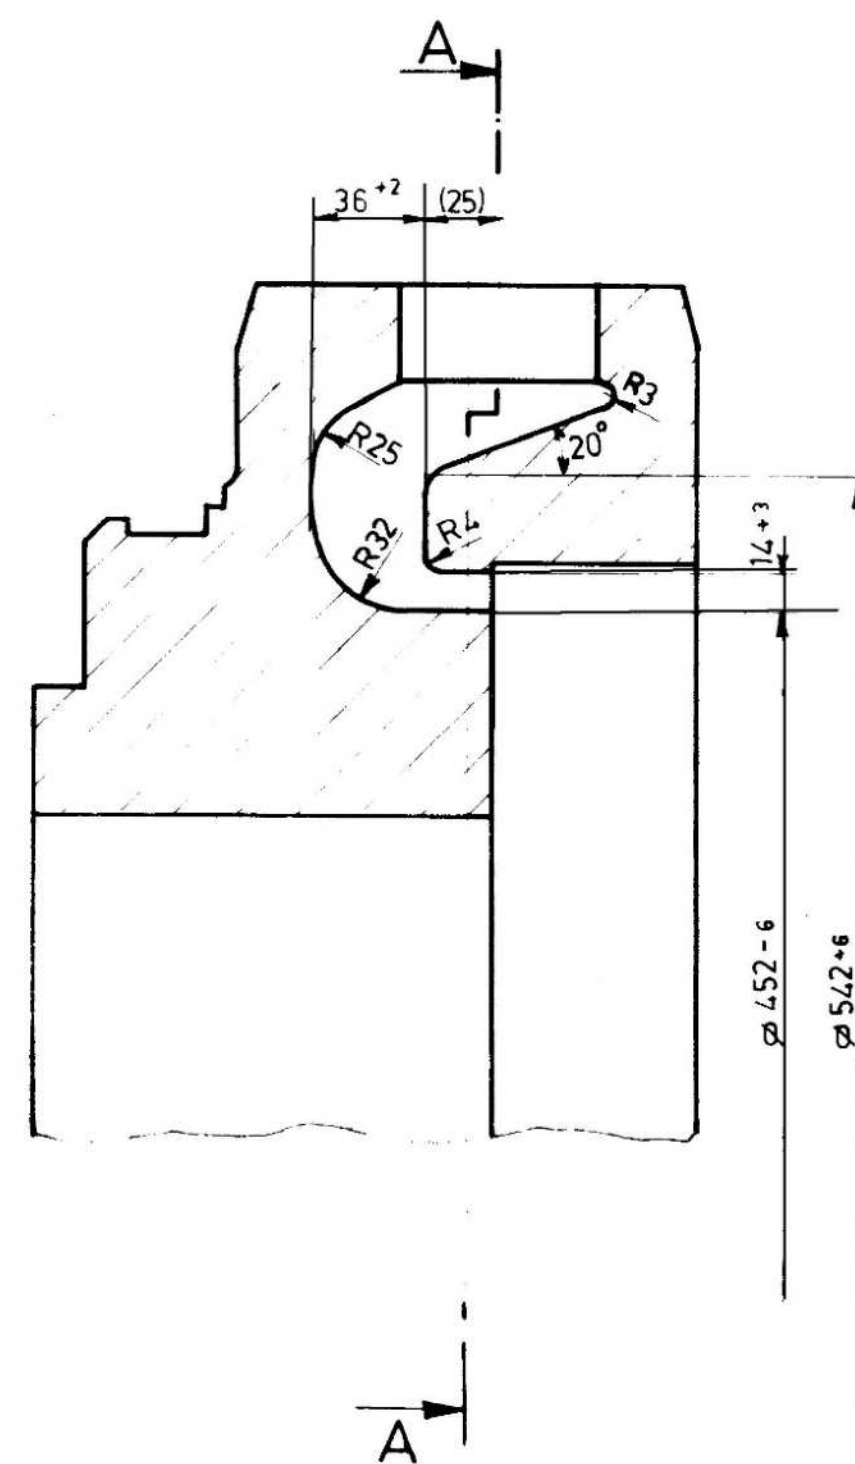


SECTION A-A

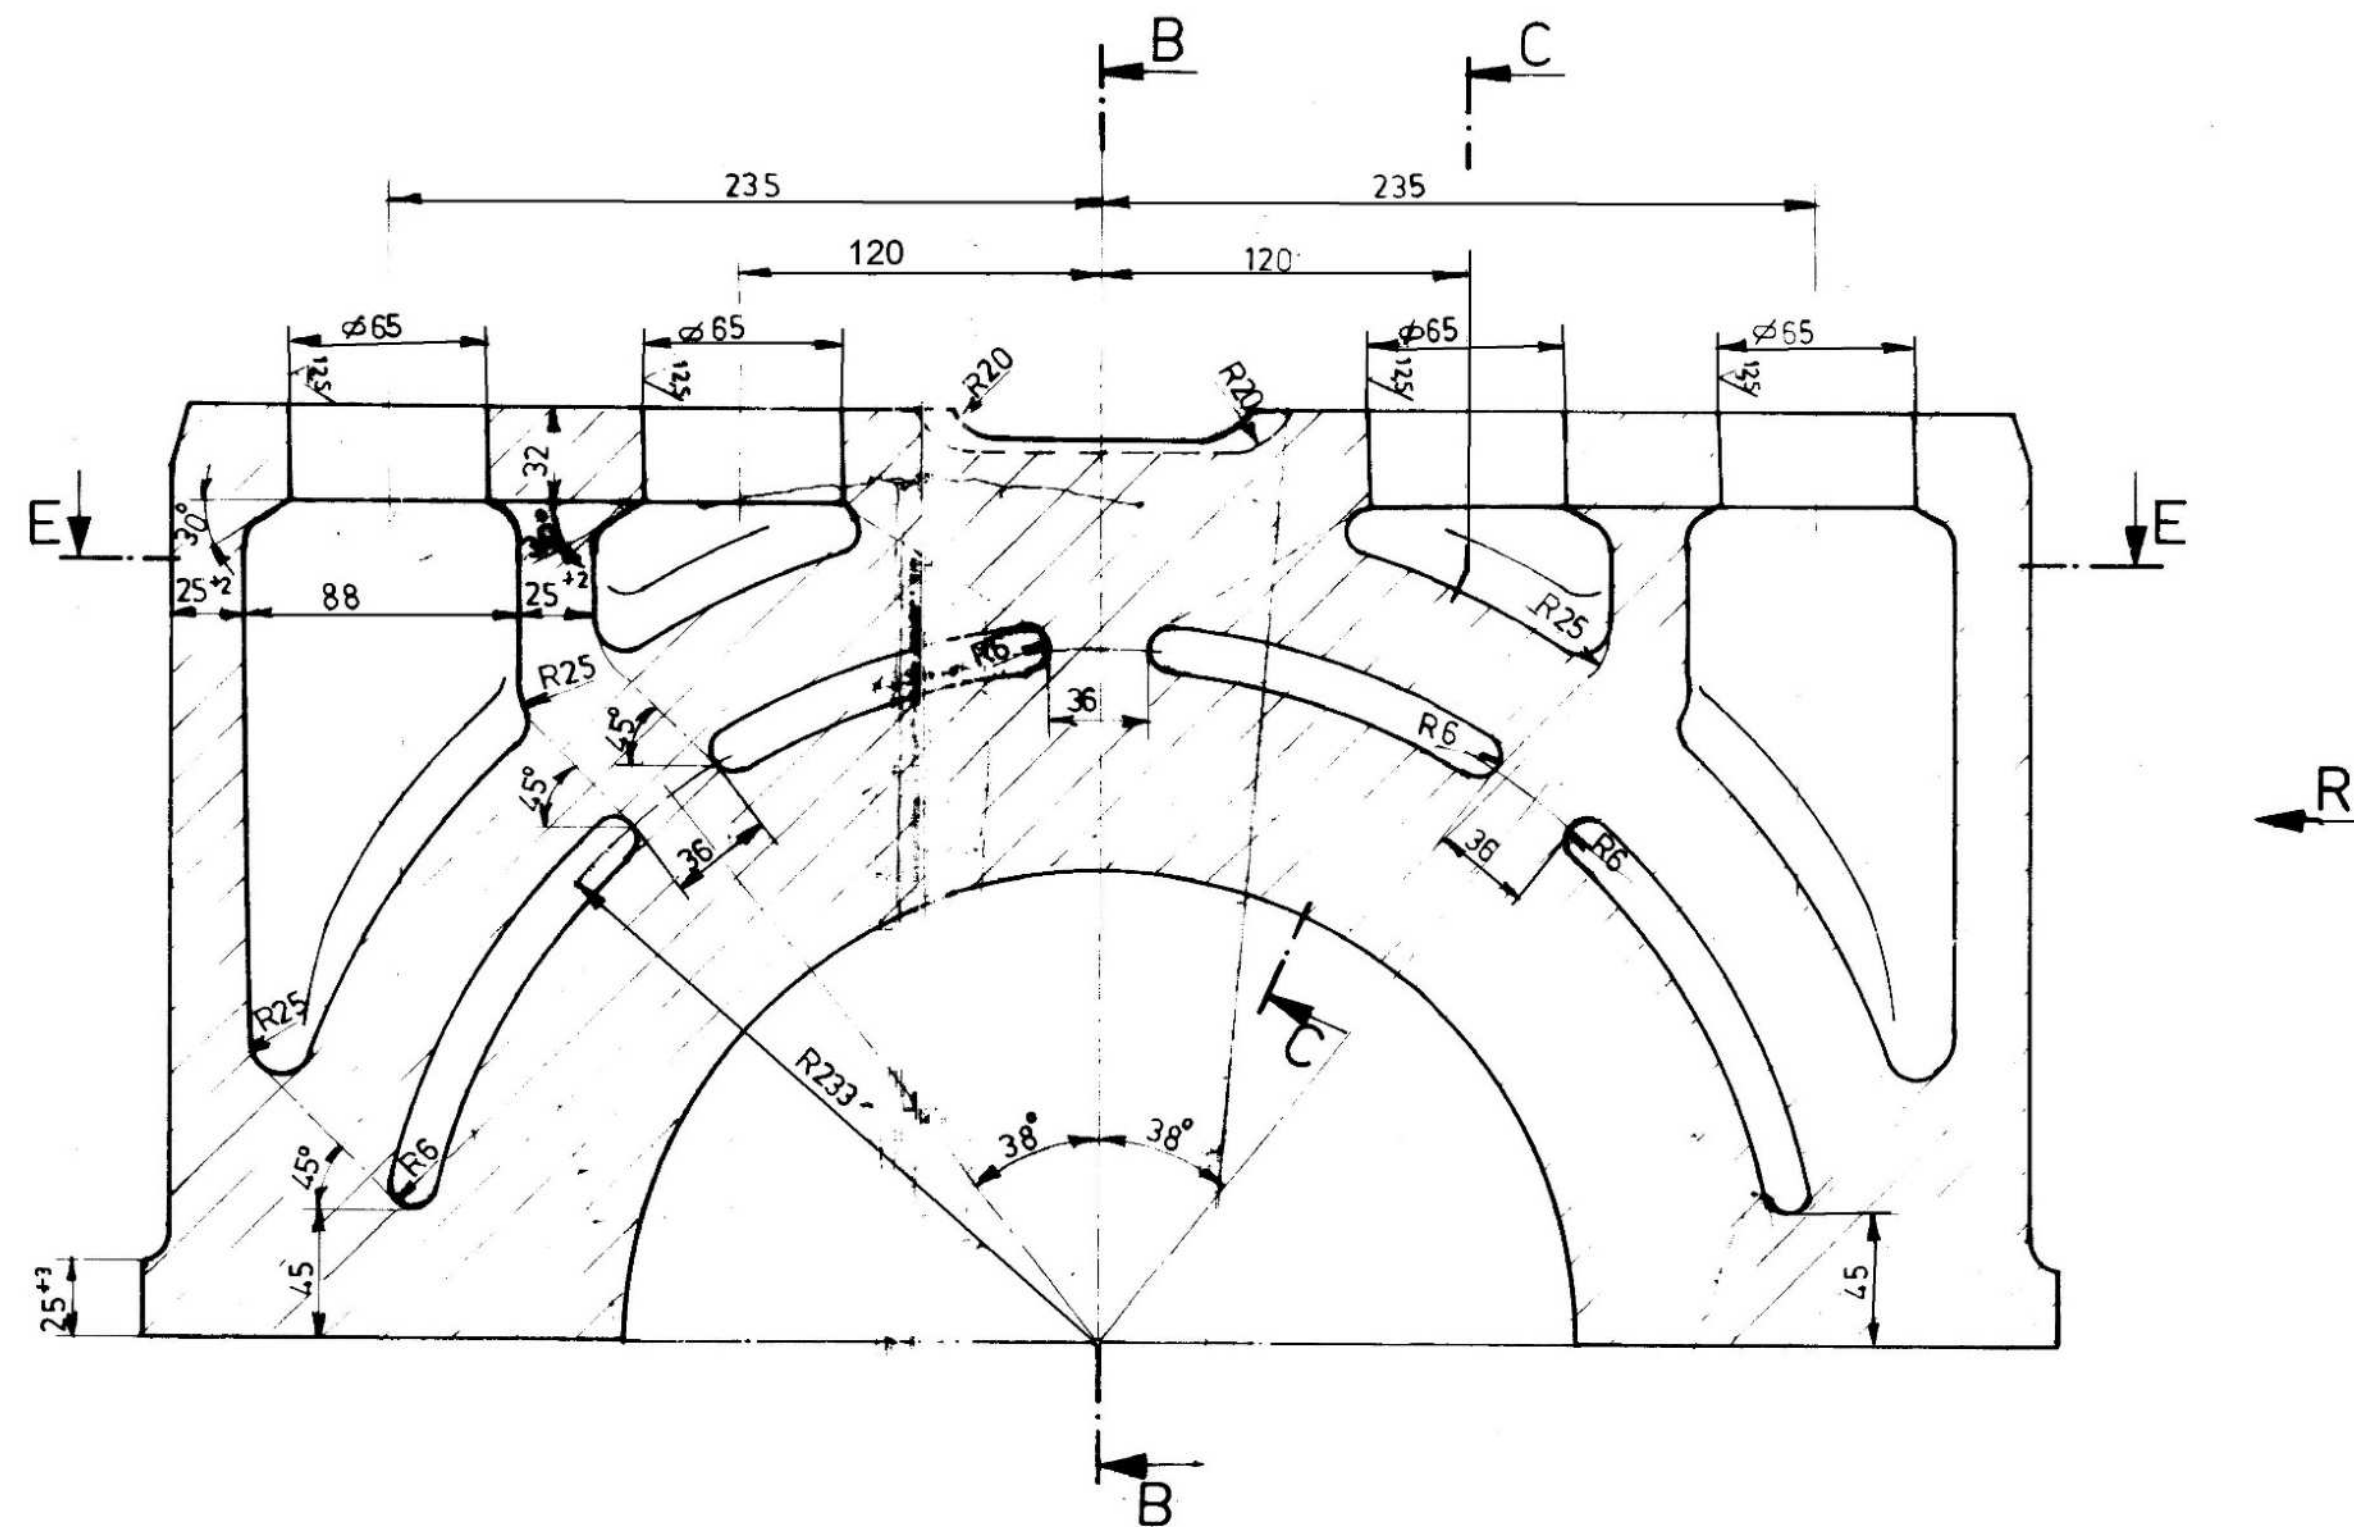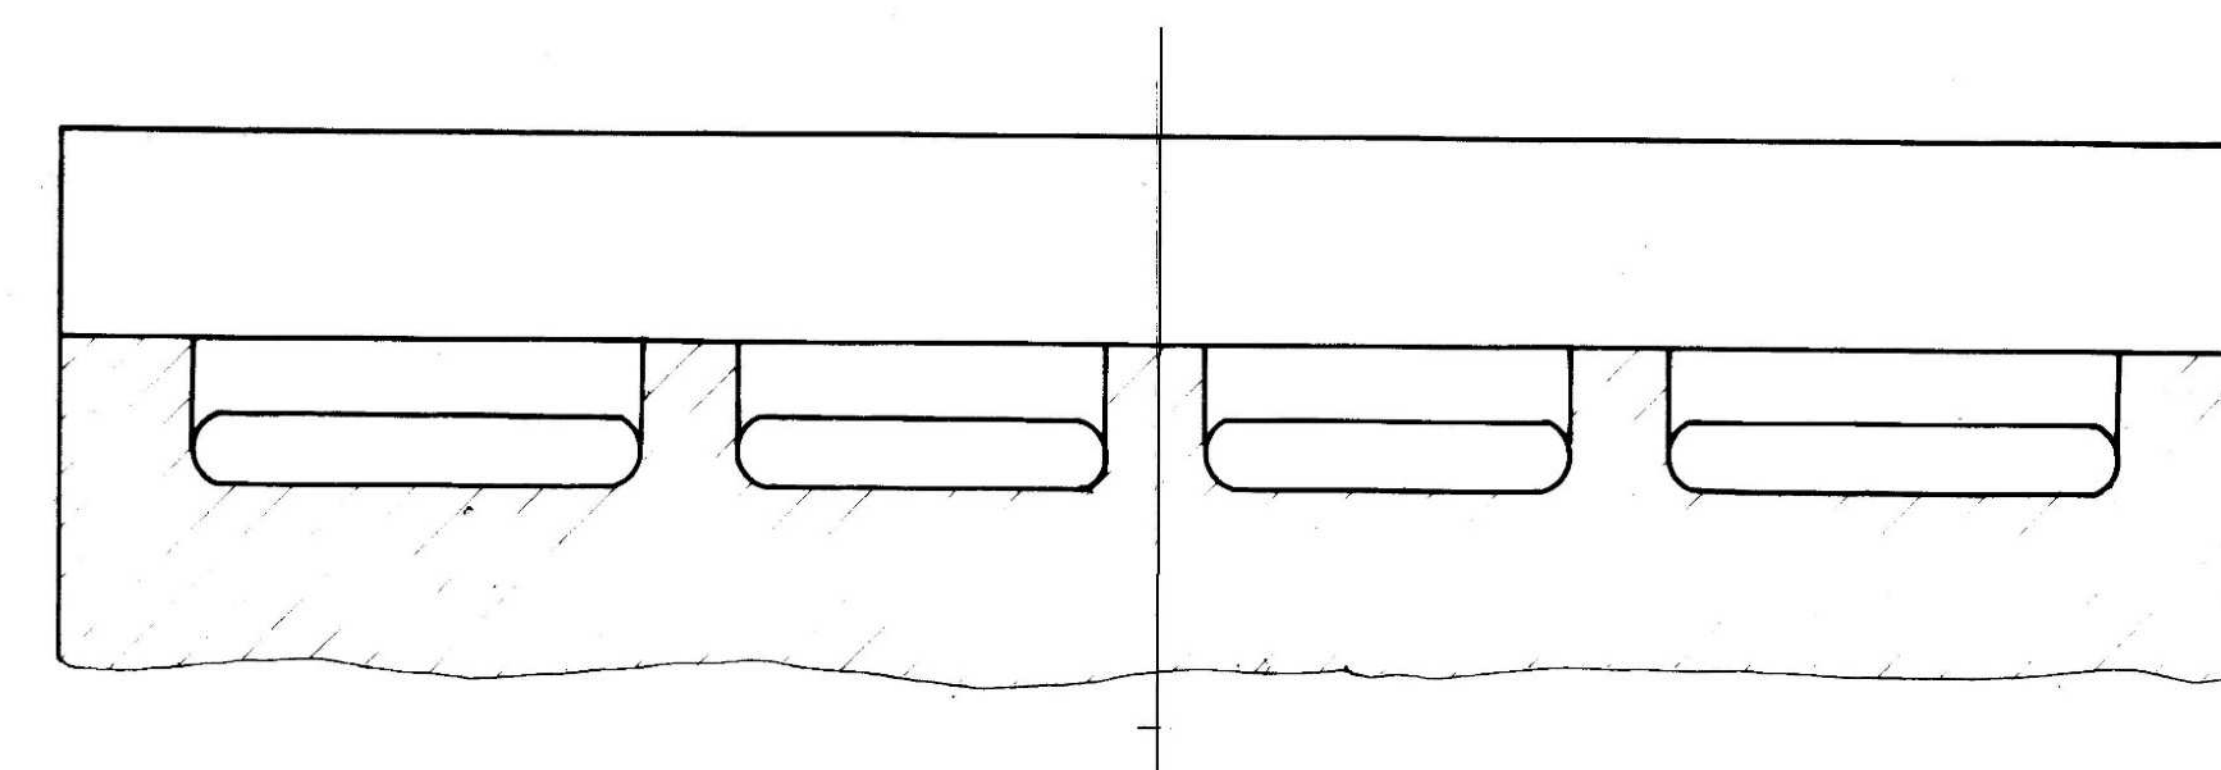
SECTION F-F
(DEVELOPMENT ON P. 260)

125 / 3.2


VIEW - D

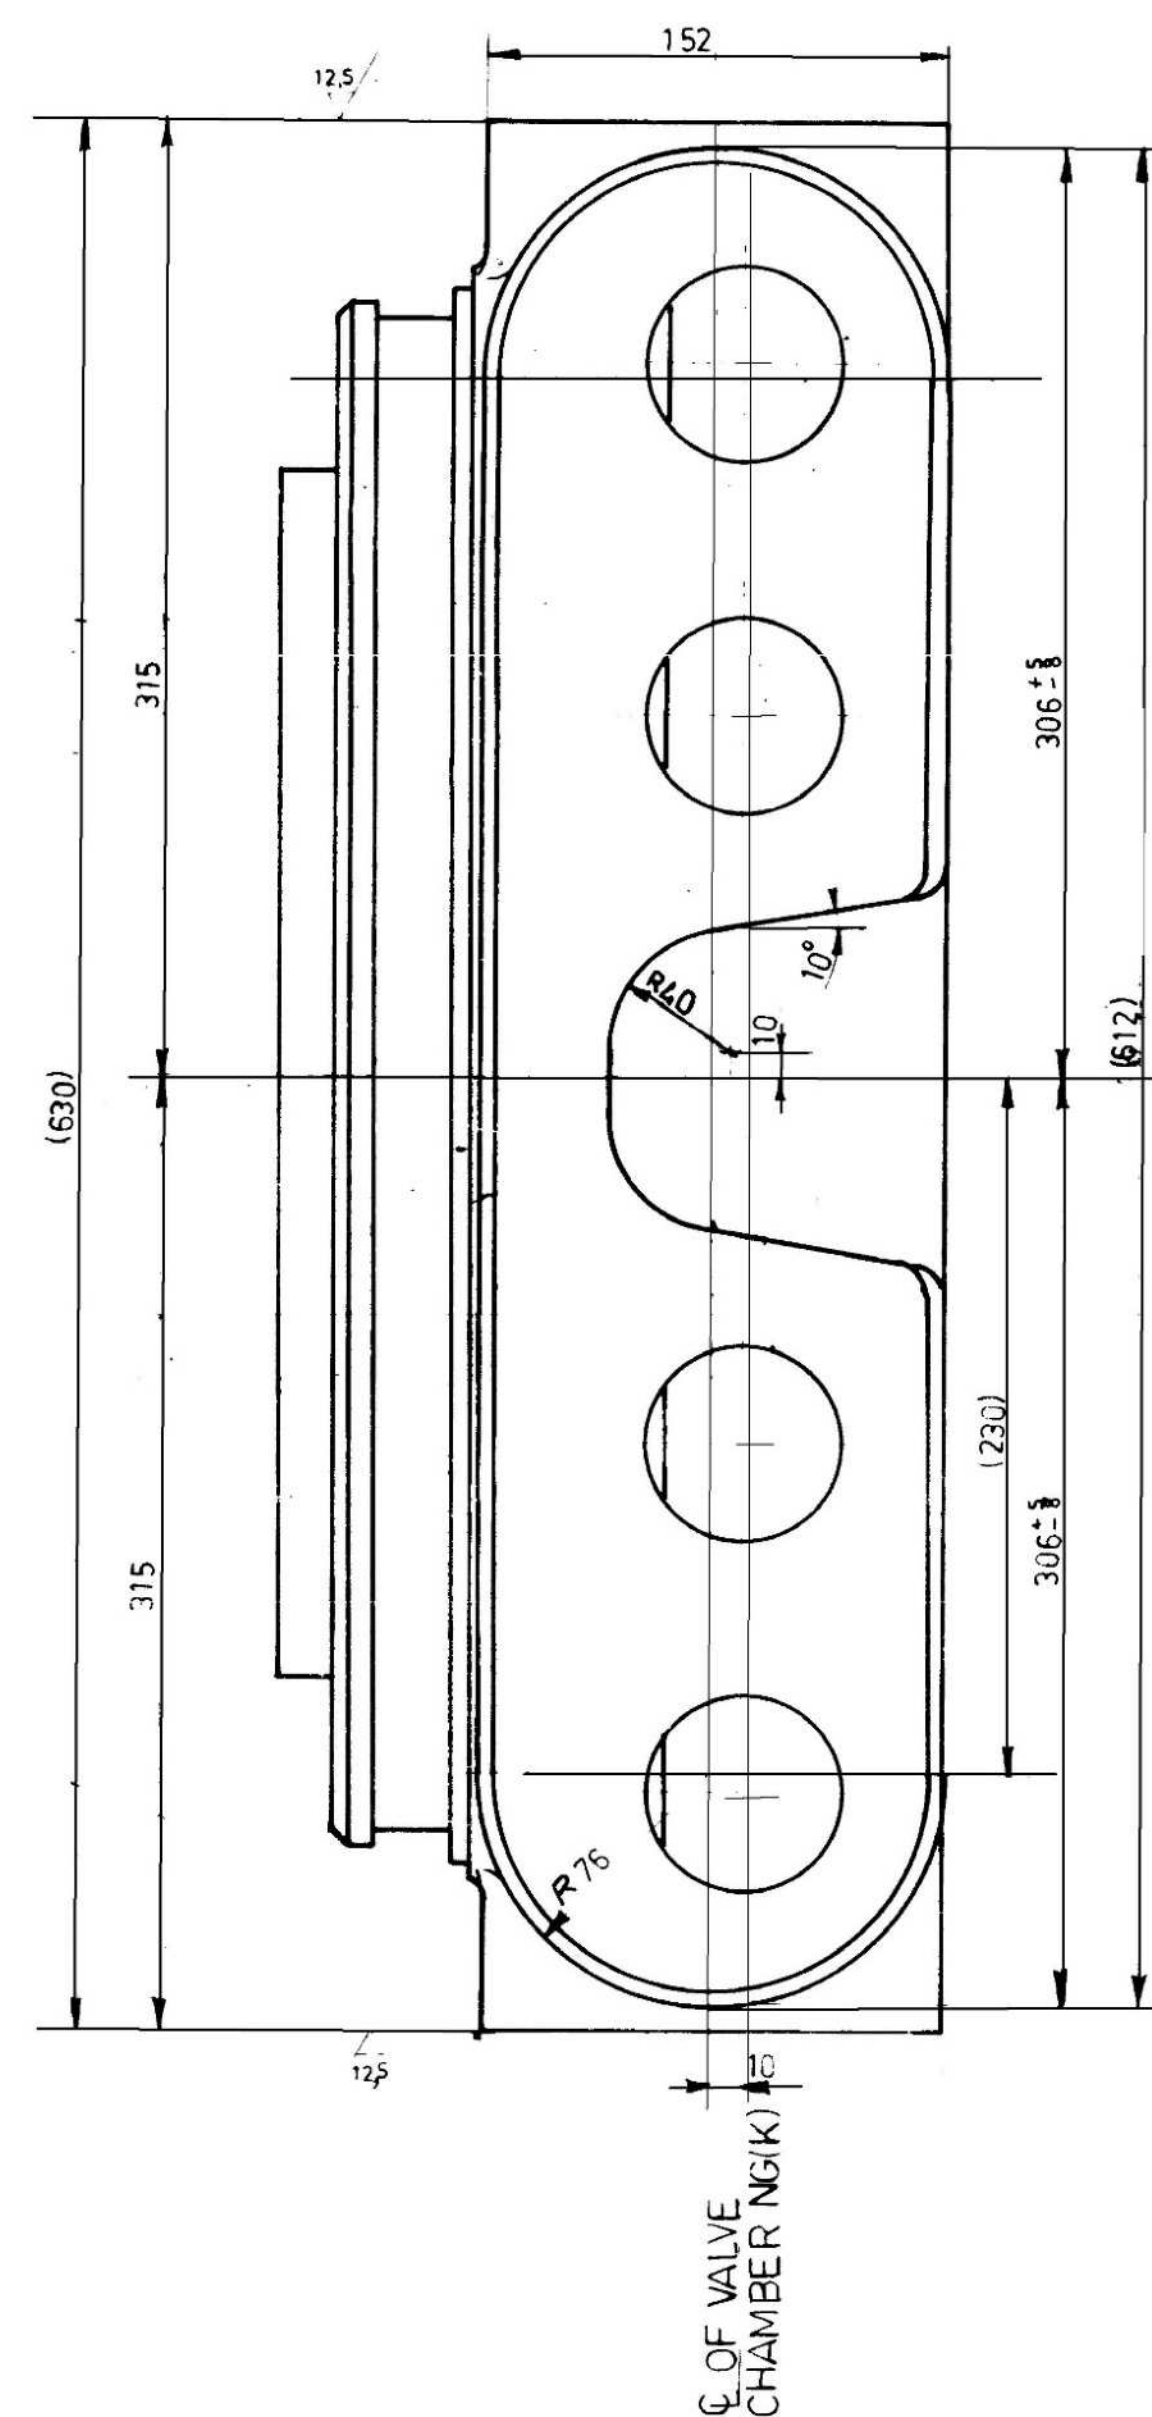


VIEW-R

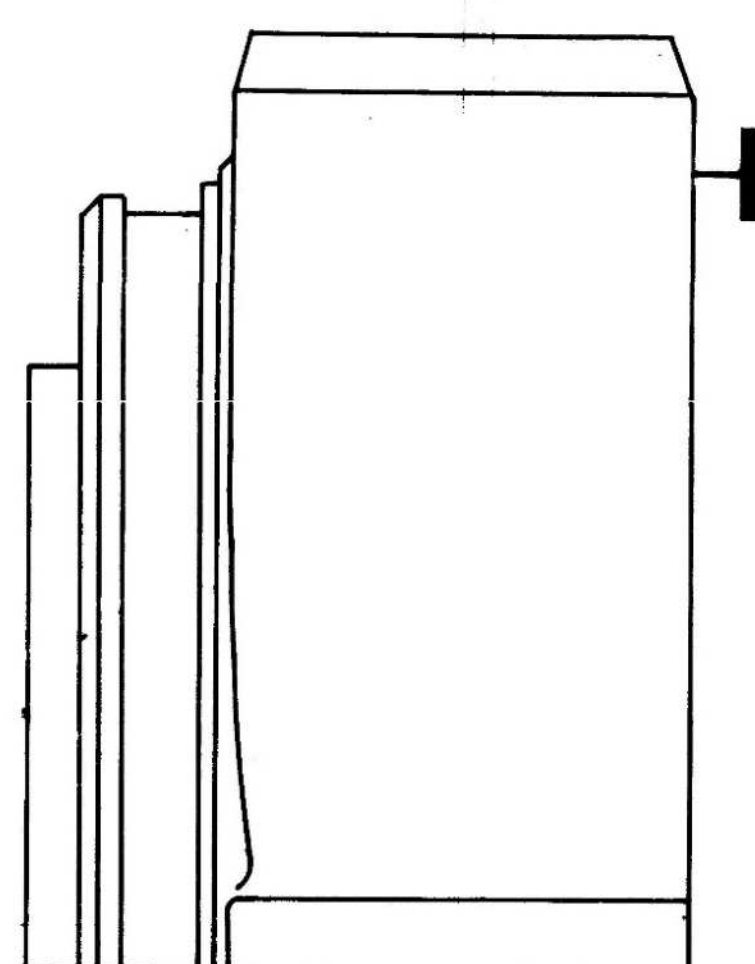

SECTION E-E

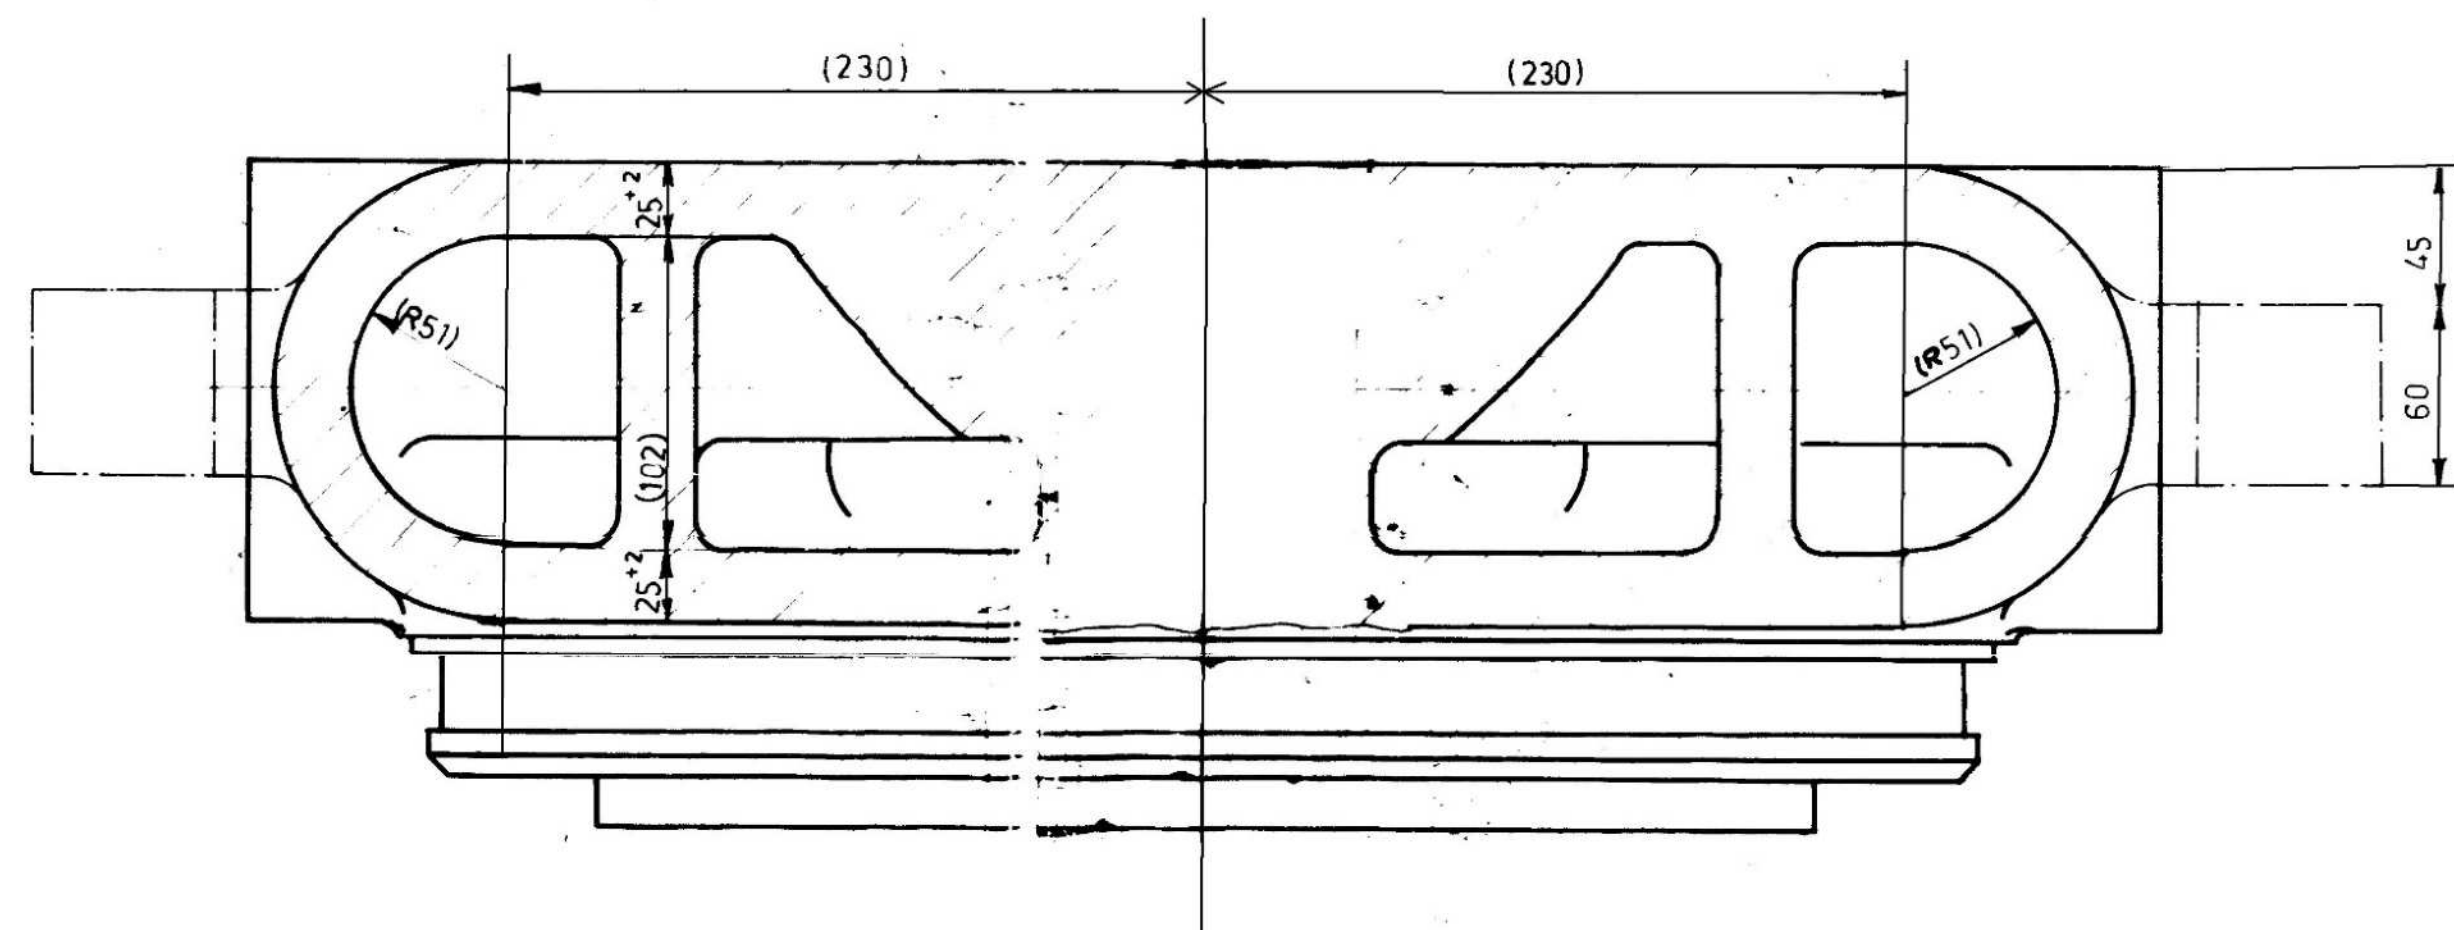




VIEW-H

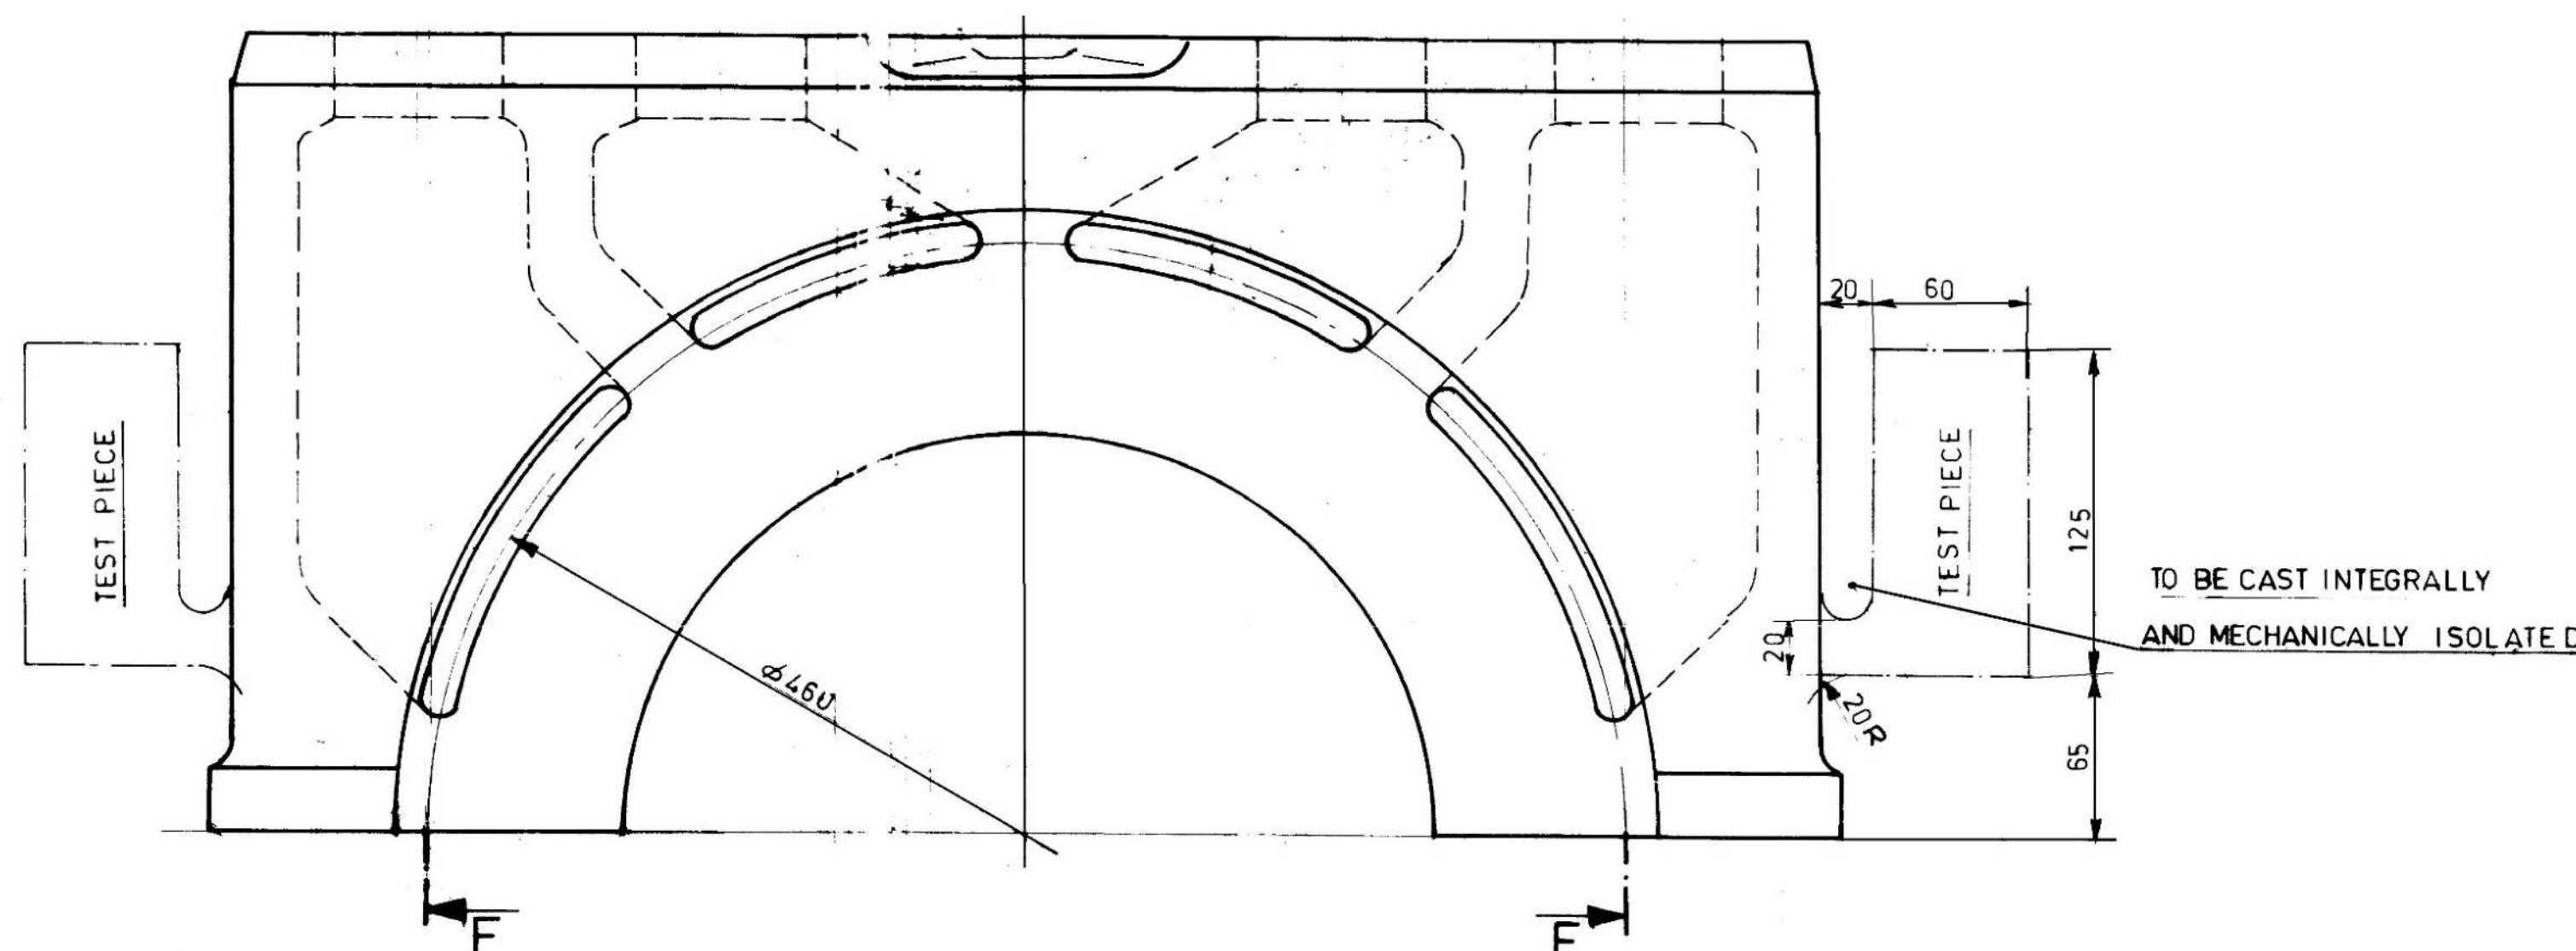**NOTE:**

1. CASTING TO BE SUPPLIED IN: **ROUGH MACHINED** & **HEAT TREATED** CONDITION AS PER **PLANT PURCHASE SPECIFICATION**
2. THE SUPPLIED CASTING SHOULD NOT CONTAIN ANY CHILLS AND CHAPLETS.
3. WELDED ON CORE PRINTS TO BE MARKED WITH CENTRE PUNCH.
4. UNDIMENSIONED RADIUS R = 8mm.
5. TEST PIECE TO BE SUPPLIED AS PER **PLANT PURCHASE SPECIFICATION**
6. MARKING AS PER **PLANT PUR. SPEC.** TO BE MADE AT PLACES SHOWN THUS: **■**
7. SEE ALSO DRAWING **I-30134-10002** FOR LOWER PART.

HY19570	184	270	GS - C25	14
HY19572	165	330	GS-17CrMoV55	13
HY19570	150	350	GS - C25	12
HY19571	160	320	GS-22Mo4	11
HY19573	165	330	GS-17CrMoV511	10
HY19571	165	330	GS-22Mo4	09
HY19570	165	310	GS - C25	08
HY19570	162	375	GS - C25	07
HY19571	184	270	GS 22Mo4	06
— II —	190	245	GS-22Mo4	05
HY19570	190	245	GS-C25	04
— II —	175	305	GS C25	-03
HY19571	175	305	GS 22Mo4	-02
HY19574	175	305	GS 17CrMo55	-01
HY19573	175	305	GS 17CrMoV511	-00
PLANT PURCHASE SPECIFICATION	wt.	d	MATERIAL	Variant

TO BE CAST INTEGRALLY
AND MECHANICALLY ISOLATE D.

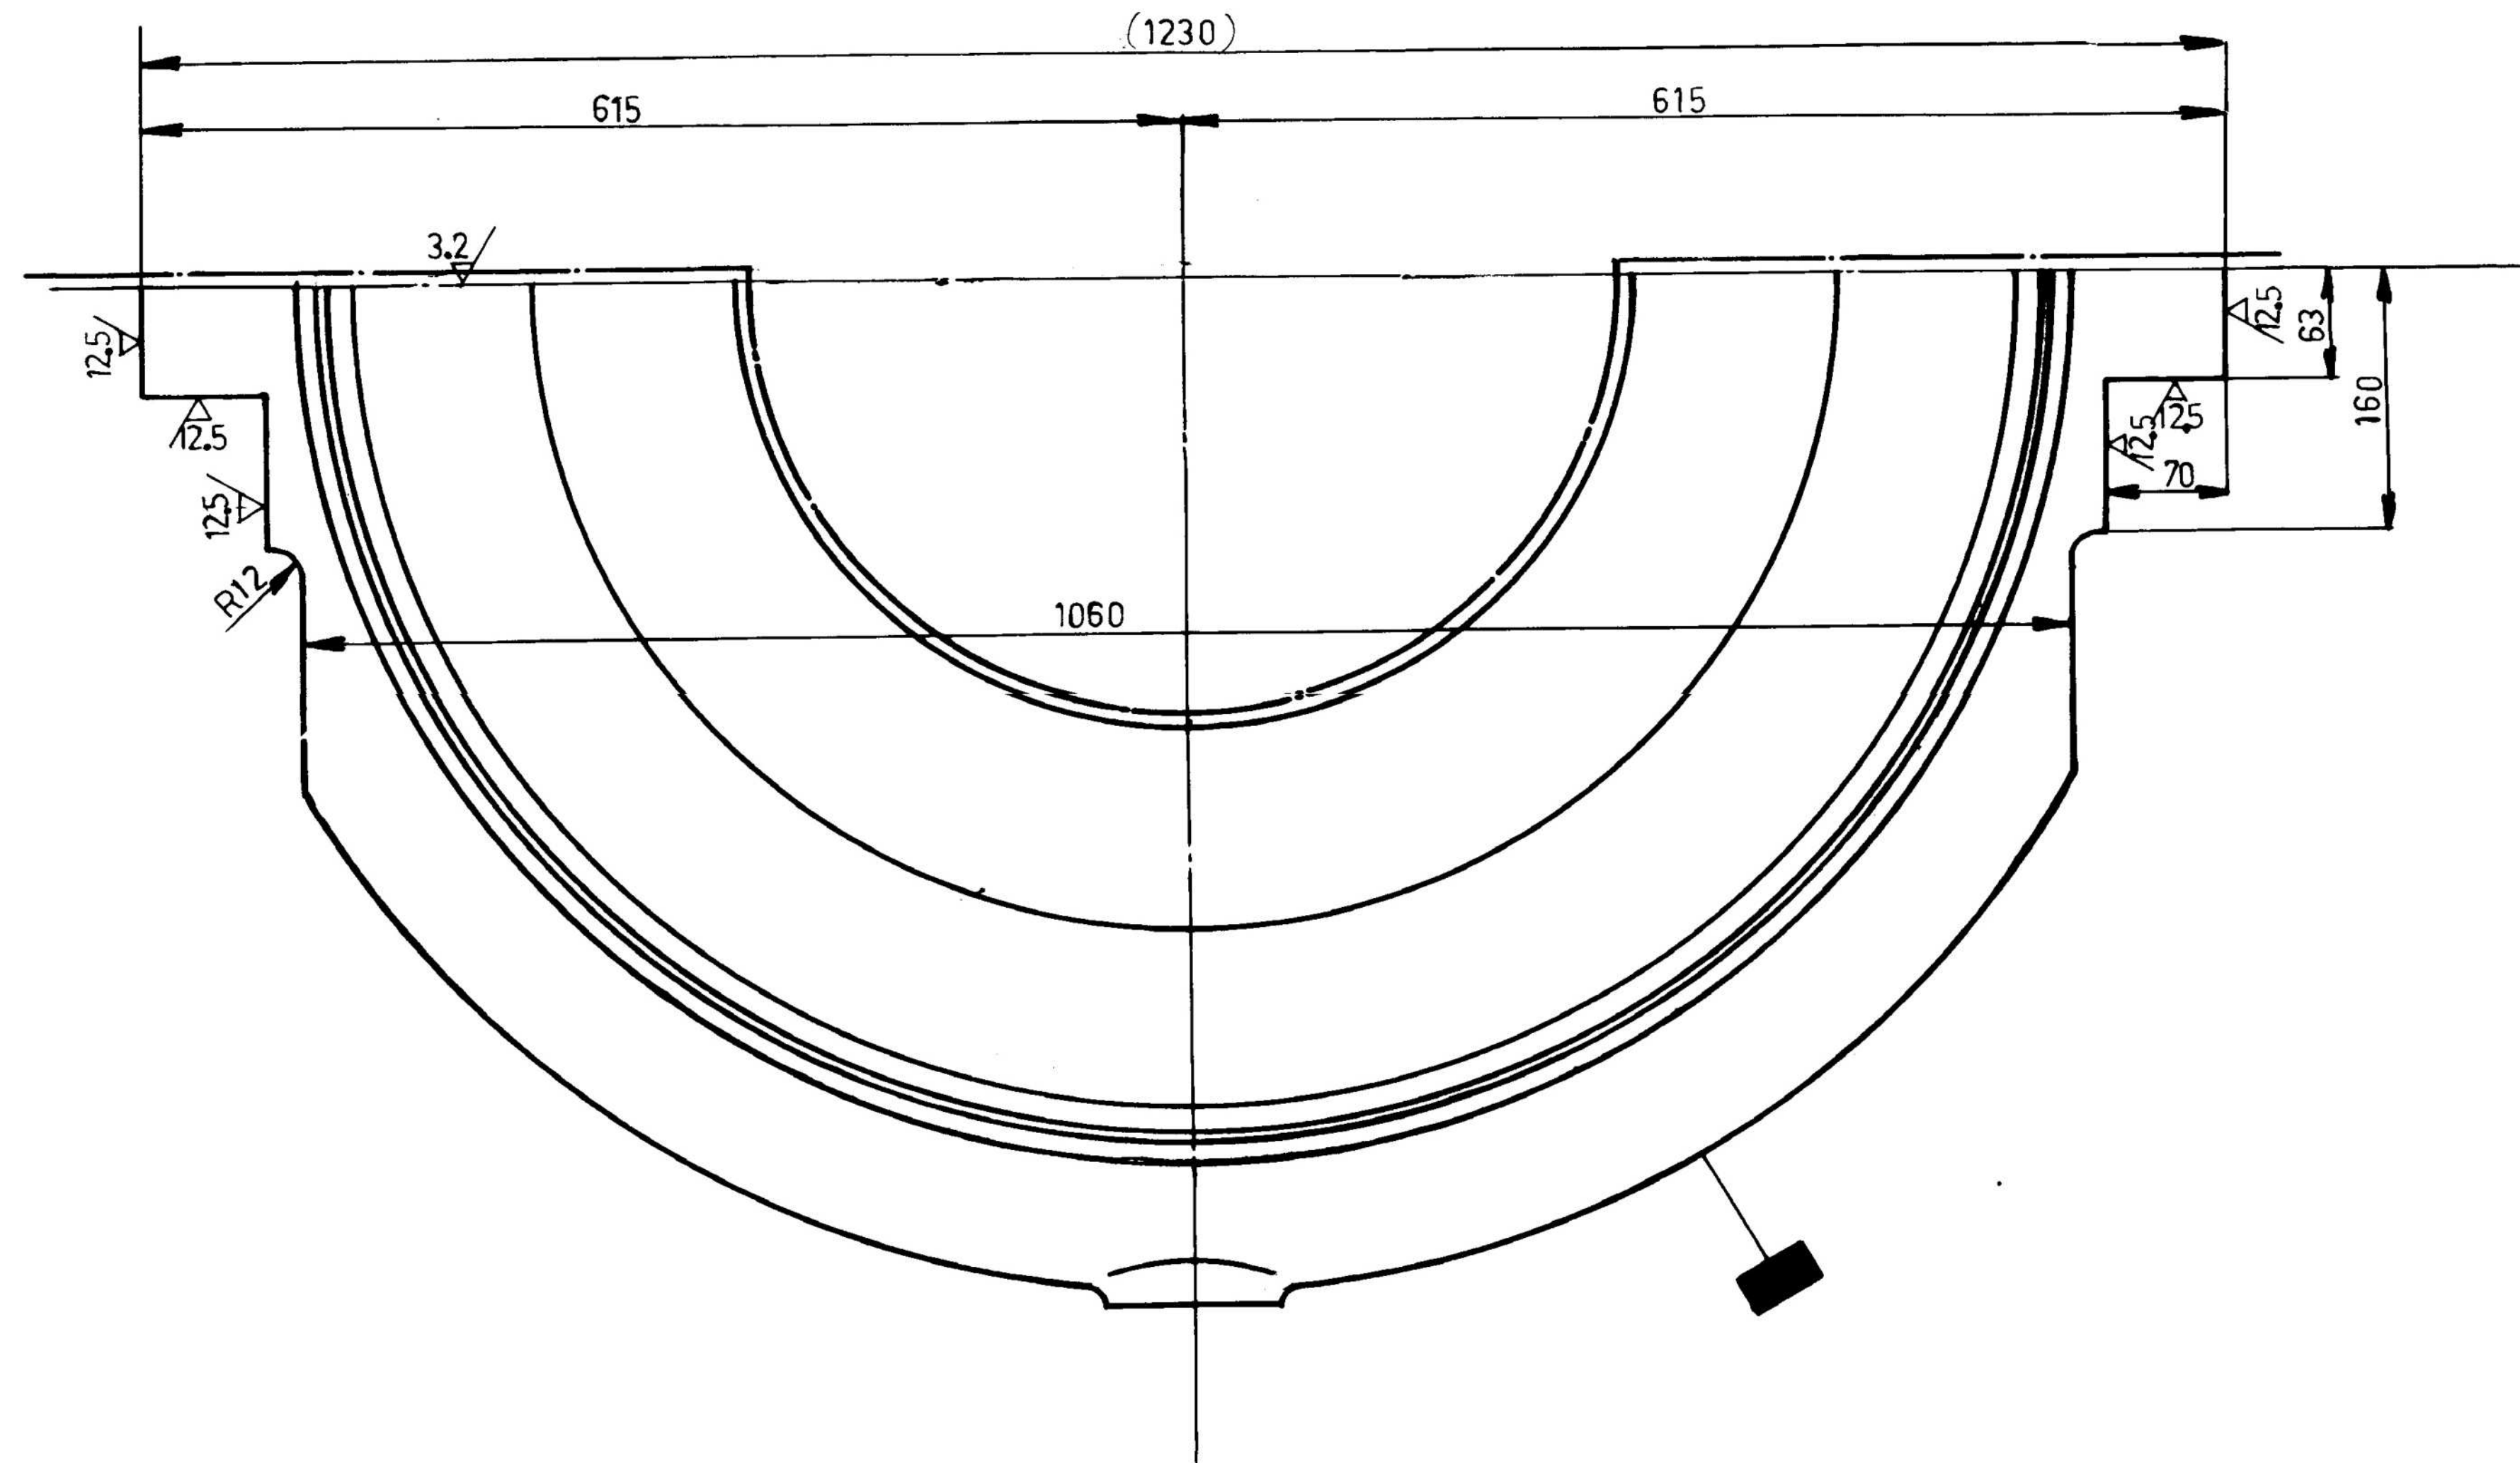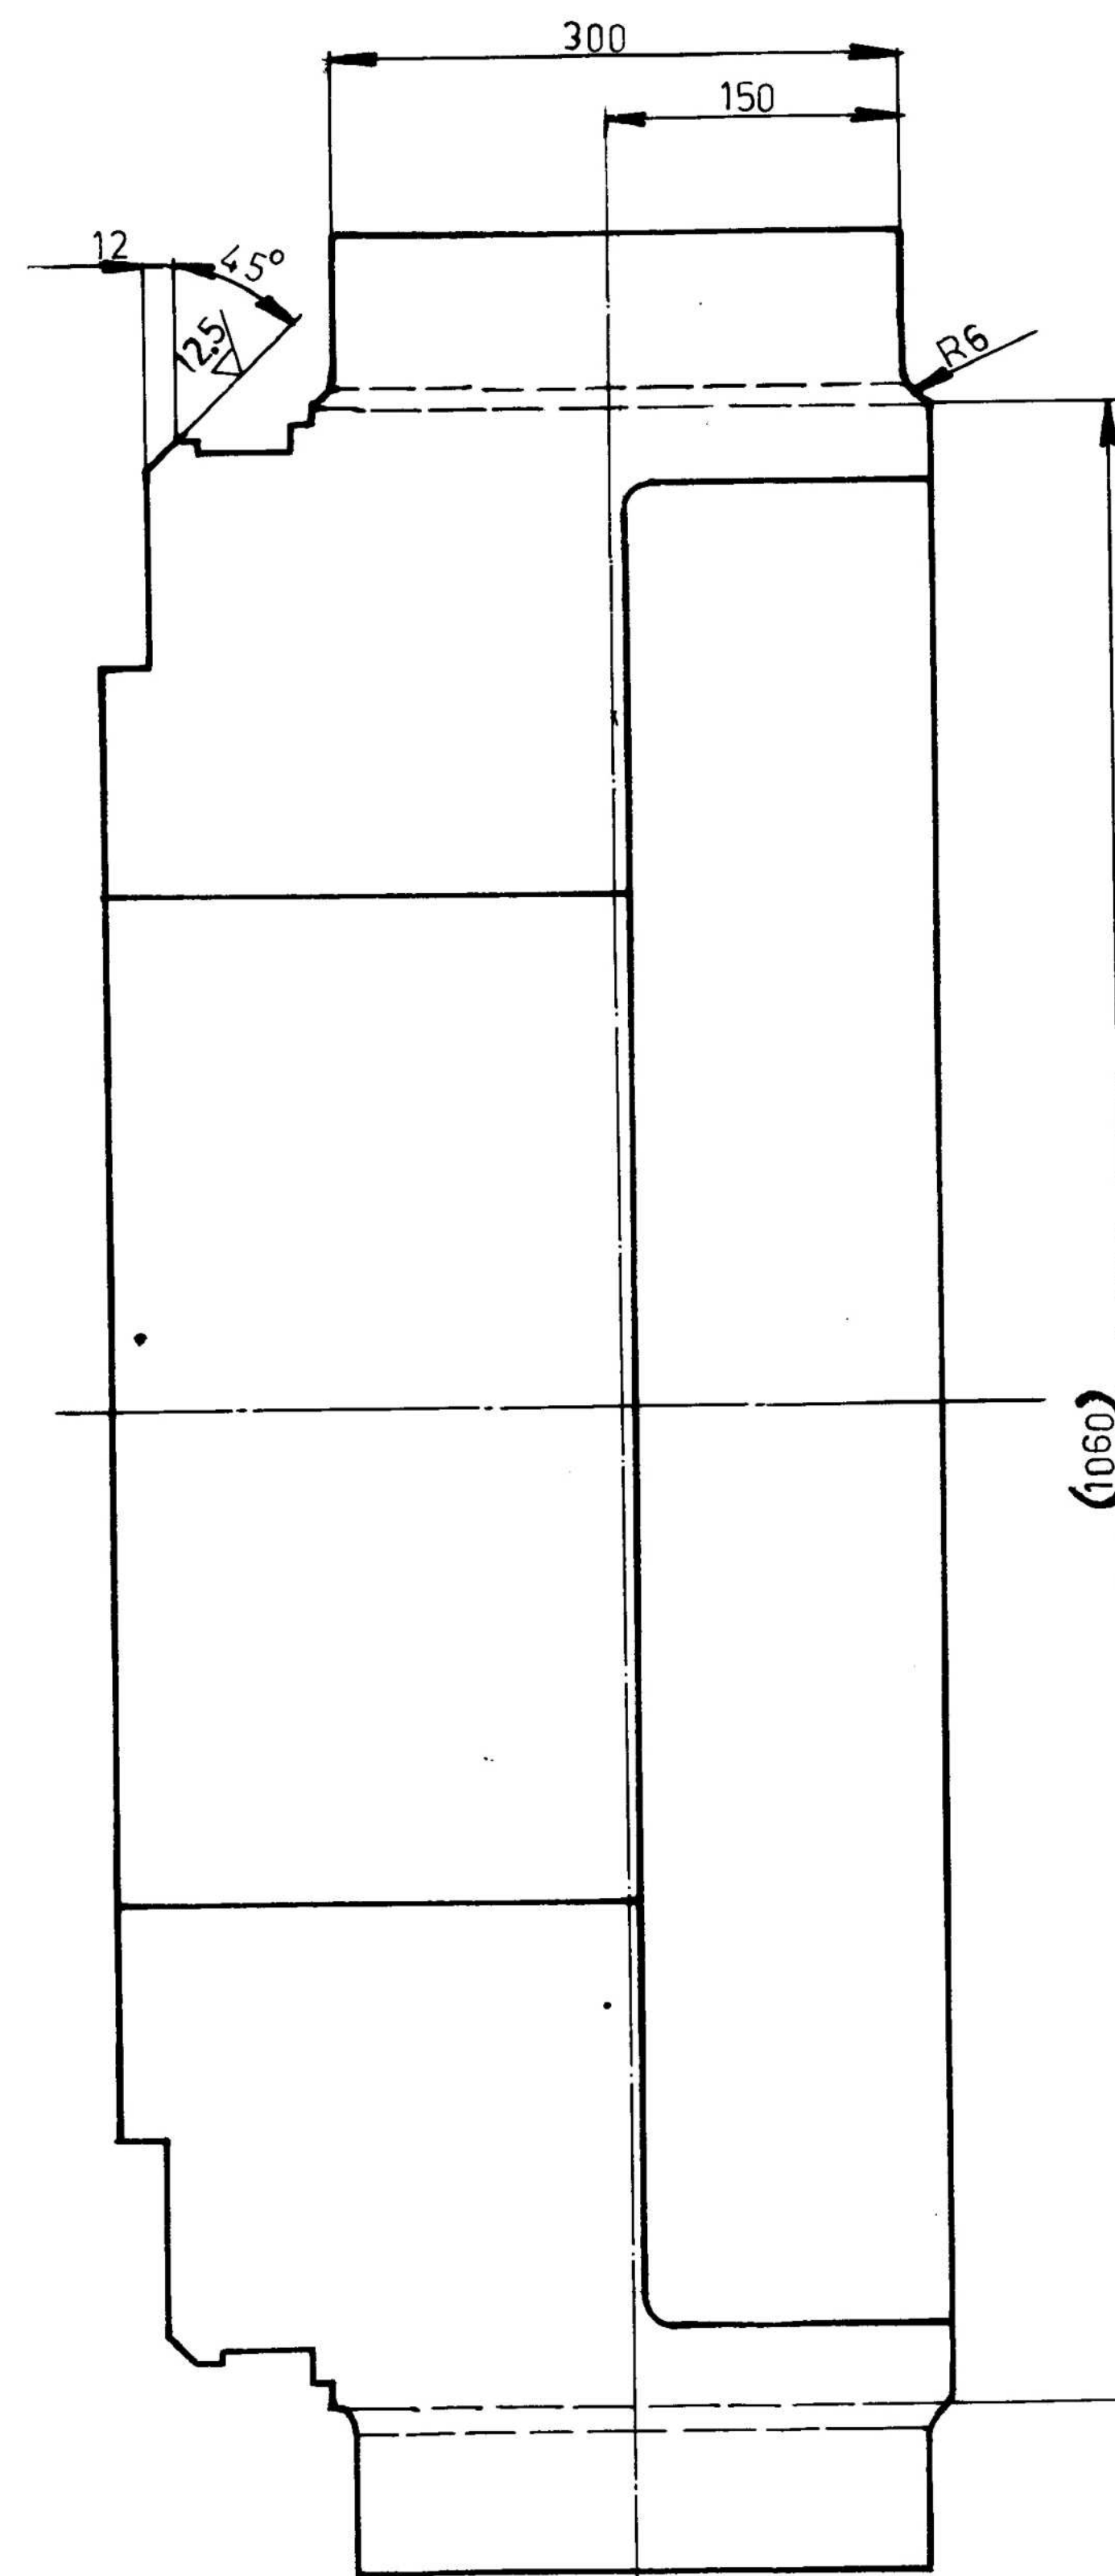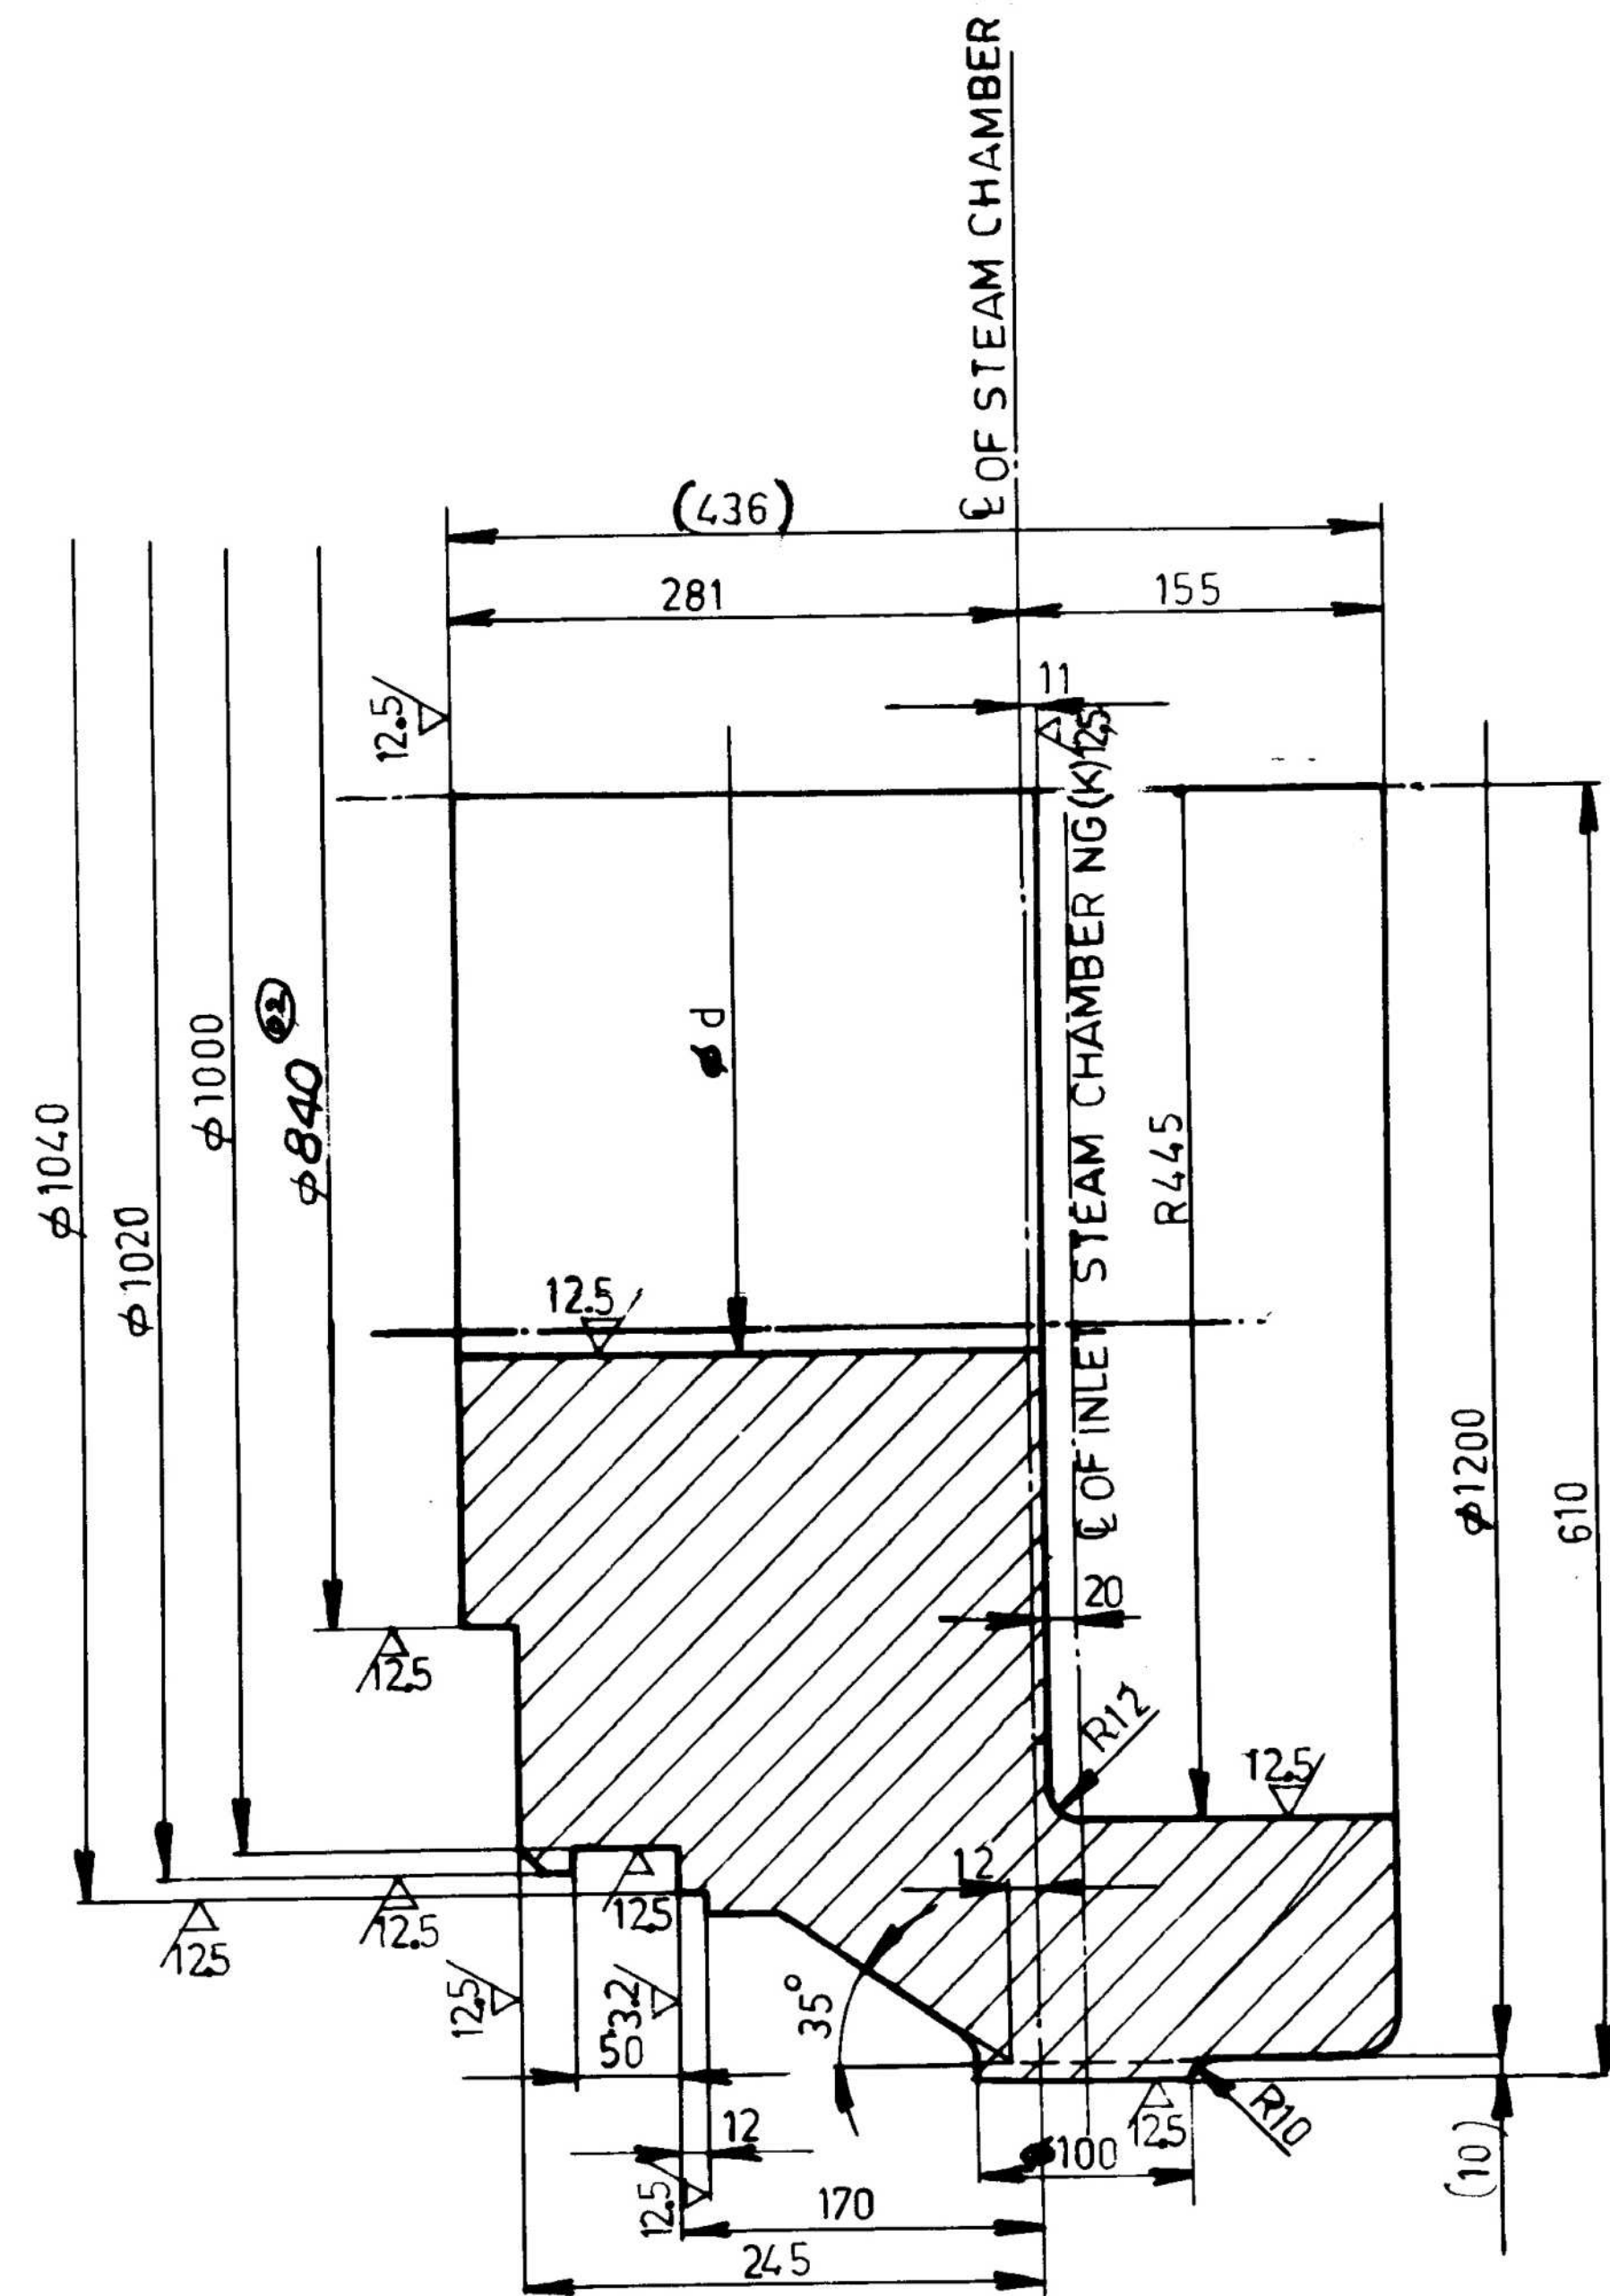


NOTES AS PER DRAWING
NO. 0 - 30134 - 10001-XX

TC9217008230	660	HY19570	GP 240 GH	835	17
TC9217008214	660	HY19570	GP 240 GH	835	16
	640		GS C25	910	15
	640		GS 22Mo4	910	14
	640		GS 17CrMo 55	910	13
	640		GS 17CrMoV 511	910	12
	620		GS C25	870	11
TC92171075 22	620	HY19571	GS 22Mo4	870	10
	620		GS 17CrMo 55	870	09
	620		GS 17CrMoV 511	870	08
	530		GS C25	960	07
TC 921 71 07 778	530	HY19571	GS 22Mo4	960	06
	530		GS 17CrMo 55	960	05
	530		GS 17CrMoV 511	960	04
	730		GS C25	740	03
	730		GS 22Mo4	740	02
	730		GS 17CrMo 55	740	01
	730		GS 17CrMoV 511	740	00
MATERIAL CODE	Ø d	PLANT PURCHASE SPECIFICATION	MATERIAL (OLD)	Wt. Kg	VAR: xx

BHARAT HEAVY ELECTRICALS. LTD.
CENTRAL FOUNDRY FORGE PLANT
RANIPUR HARDWAR

DEPT. TECH.	SCALE	WEIGHT	NAME	SIGN	DATE
TITLE	STEAM CHAMBER N63	DRN	WKO	NK GAURAV	
PROJECT AND CUSTOMER NAME	LOWER HALF (BZ)	CHD	R. LAKRA		
TECHNOLOGY NO	1-301-34-10001/S	APPD	T. DAVE		
DRAWING NO.	1-301-34-10001/S	SHEET NO.	NO. OFF SHEETS		

REV	DATE	ALTERED	REV	DATE	ALTERED	REV	DATE	ALTERED
ZONE		CHECKED	ZONE		CHECKED	ZONE		CHECKED

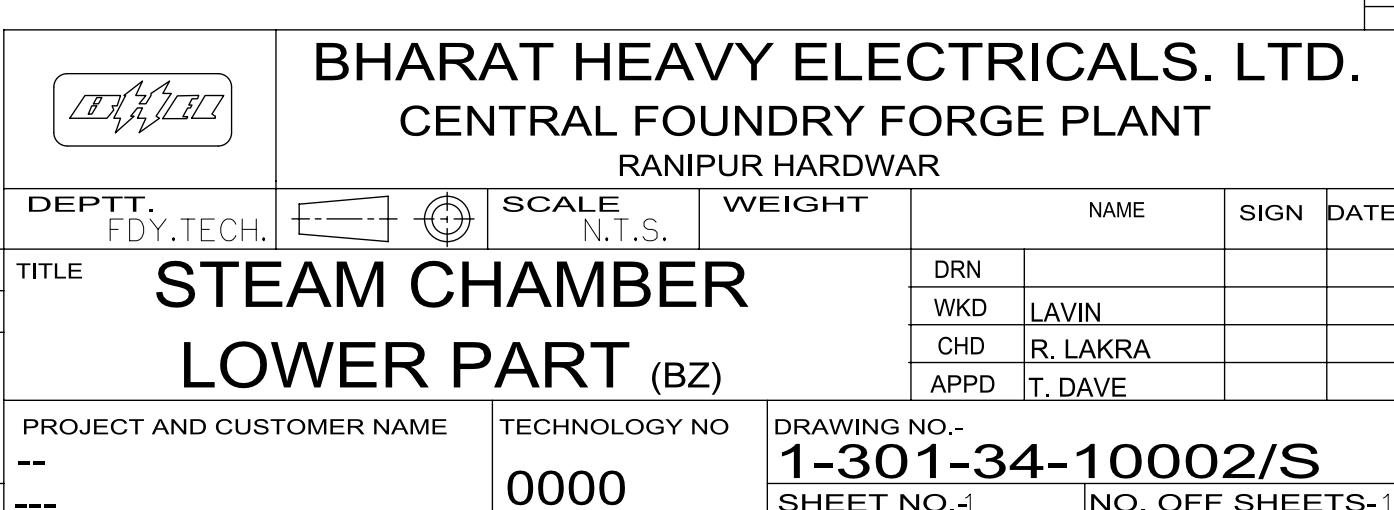



CORPORATE STANDARD

AA 085 01 07

Rev. No. 00

PAGE 1 OF 22

Ultrasonic Testing of Steel Castings

List of Contents

Page

1	Scope of Application	2
2	Referenced Documents	2
3	Inspection Purpose	2
4	Point of Time and Scope of Inspection	2
4.1	First Testing after Quality Heat Treatment	2
4.2	Testing after last Heat Treatment	2
5	Testing Personnel	2
6	Inspection Surfaces	2
7	Ultrasonic Test Equipment	2
8	Transducers	3
9	Coupling Media	3
10	Calibration of Sound Path Distance	3
11	Sensitivity Calibration	3
12	Evaluation and Recording of UT-Indications	5
13	Test Procedure	6
13.1	First Examination after Quality Heat Treatment	6
13.2	Examination after the last Heat Treatment	7
13.3	Selection of Test Frequency	9
13.4	Determination of the Sizes of Discontinuities	9
13.4.1	Determination of the Sizes of Discontinuities mainly parallel to the Surface	9
13.4.2	Determination of the Sizes of Discontinuities perpendicular to the Surface	9
14	Acceptability Limits for Discontinuities	10
15	Tandem Testing	15
16	Documentation	19
	Annexure-1	21
	Annexure-2	22

Revisions :

Cl. 33.1.0 of MOM of FC&F+HTM

APPROVED :

INTERPLANT MATERIAL RATIONALISATION
COMMITTEE-MRC (FCF+HTM)

Rev. No. 00

Amd.No.

Reaffirmed:

Prepared

Issued

Dt. of 1st. Issue

Dt:

Dt :

Year :

HARIDWAR

Corp. R&D

FEB. 2008

AA 085 01 07	CORPORATE STANDARD	
Rev. No. 00		
PAGE 2 OF 22		

1. Scope of Application

This instruction applies to the Ultrasonic testing of steel casting components including production welding, e.g. barrel type casings, inner casings, outer casings, valves, guide blade (vane) carriers, half rings, valve inserts, valve covers, etc. This specification applies also for design welding between two cast components and between casting and forging components.

2. Referenced Documents

EN 473, SNT TC 1A, EN 1370, EN 27963, EN 12223, pr EN12680-2, AVS D 58 A/000

3. Inspection Purpose

Examination of surface and volume discontinuities caused by manufacturing

4. Point of Time and Scope of Inspection

4.1 First Testing after Quality Heat Treatment

The castings shall be tested to 100 % after quality heat treatment. Detailed sketches with description of the applied casting technology (gatings, feedings, risers, chills) shall be made available upon request during acceptance inspection by the Quality Department. In case of non-availability of such documents the procedure corresponding to clause 13.1 is to be applied.

4.2 Testing after last Heat Treatment

Cross sections, radii, production welding and design welding are to be tested after last heat treatment. A detailed description of the test procedure is shown under clause 13.2.

5. Testing Personnel

Testing personnel with certification according to EN 473 (level 1 according to SNT TC 1A or an equivalent standard) can be employed, if there is any supervisory personnel with certification level 2 according to EN 473 (level 2 according to SNT TC 1A or an equivalent standard). The personnel must be able to apply DGS method.

An actual list of the operators with the required certification is to be sent to the customer and must be kept up to date.

6. Inspection Surfaces

The inspection surface must be free from dust, scaling, residual molding material and shot-blast material. The surface condition in the testing areas must meet the minimum requirements 3S1 (for shot-blast areas) and 3S2 (for ground areas) of BNIF 359 according to EN 1370. In case of design welding the root pass and the final pass must be ground evenly or must be machined. In any case, a satisfactory coupling of the transducer must be ensured.

7. Ultrasonic Test Equipment

USD15, USN52 (digital), USIP11, USM3-S, USL31 and other equivalent instruments.



CORPORATE STANDARD

AA 085 01 07

Rev. No. 00

PAGE 3 OF 22

8. Transducers

The transducers must be used according to the tables 3 and 4. Equivalent transducers are permitted.

To match the casting shape, fit the probe shoes always when applying shear wave probes, especially twin-crystal shear wave probes.

9. Coupling Medium

Paste, glycerin, oil or other equivalent couplant.

10. Calibration of Sound Path Distance

• Straight Beam Probes

A steel cast reference block is to be used for calibration of sound path distance (e.g. a stepped wedge) or the calibration can be done on the casting itself.

• Angle Beam Probes

The calibration block No. 1 with radius 100 mm according to EN 12223 or the calibration block No. 2 with radius 25 mm according to EN 27963 is to be used for calibration of sound path distance (see supporting data sheet).

11. Sensitivity Calibration

• Straight beam probe

The sensitivity calibration will be carried out by reflecting sound off the opposite face of the casting (parallel back-wall). An area without indications must be used for the calibration. The sensitivity for scanning must be calibrated in such a way that the amplitude of the flat-bottomed holes with diameters according to table 1 shall be at least about one fifth of the screen height at the end of the test range. Especially useful for scanning are DGS curves fed into the UT device or DGS scales attached to the screen. For the latter case the 6mm DGS-curve is to be used for the 3 mm DGS-reference line (gain surcharge of 12 dB).

Table 1: Requirements of ultrasonic testability (valid for 2 and 4 MHz)

wall thickness (mm)	flat-bottomed-hole (FBH) diameter to be detected (minimum detectability) (mm)
≤ 100	2
> 100 to ≤ 300	3
> 300 to ≤ 600	4
Areas with severity level 1 like weld preparation ends and sealing faces	1.5
design welding	1.5 (for radial direction of scanning)



If, in the search of discontinuities, an increased noise level, accumulation of indications or other observations imply that the reduction of back-wall echo exceeds the permissible level (see table 2), the testing shall be done locally with reduced sensitivity. In this case, the reduction of back-wall echo indications shall be measured quantitatively.

- **Angle beam probes**

The calibration block No. 1 with radius 100 mm according to EN 12223 or the calibration block No. 2 with radius 25 mm according to EN 27963 is to be used for the sensitivity calibration (see corresponding data sheet).

The sensitivity of the testing system must be adjusted such that the echo levels for general casting volumes and production welding gain about 5 % of screen height. However a testing sensitivity of 1.5mm disc reflector is to be aimed at.

- **Twin Crystal Angle Beam Probes**

The sensitivity and the testing system for twin-crystal angle beam probes are checked by watching the dynamic characteristic at an as cast rough surface standing perpendicular to the incident surface. For this method the echo height shall be about 80 % screen height at sound path distance of 20 mm.

When all surfaces of the casting are machined the sensitivity can be adjusted at a 1.5mm side drill hole. In this case the echo height shall adjust to 80 % screen height and give a gain surcharge of 8 dB.

- **Testing of Design Weldings**

For the testing of design weldings, one of the following methods shall be applied:

Method 1: The reference line is a distance amplitude correction curve (DAC) of a 0.75mm side drill hole (SDH). A 0.75 mm diameter side drill hole (SDH) can be represented by a 3mm diameter SDH, if the distance amplitude correction curve (DAC) of a 3mm diameter SDH is reduced by 50%.

Method 2: The reference line of 1.5mm disc reflector is to be produced on the screen for each probe for testing of design welding. A sound attenuation of 8 dB/m must be considered for the test frequency of 2 MHz and 20 dB/m for 4 MHz.

The applicable method shall be recorded in the test report

Remark

The notable amplification values in the various wall thickness areas shall be documented for straight beam and angle beam probes with reference to table 6.

If this minimum testing sensitivity is not possible to adjust, the smallest disc reflector (minimum detectable size) which can be detected is to be recorded in the test report. Additionally corrective measures shall be agreed with BHEL.



CORPORATE STANDARD

AA 085 01 07

Rev. No. 00

PAGE 5 OF 22

The minimum detectable flaw size has to be determined as follows:

- Adjusting the back wall echo to 40 % screen height.
- The amplification has to be increased until the noise level reaches in average 20 % screen height.
- Determination of equivalent flaw size from the DGS diagram in consideration of the corresponding maximum sound path.

12. Evaluation and Recording of Indications

• Straight Beam Probes

All back-wall echo reductions or echo indications as shown in table 2 are to be evaluated if they are not dependent upon casting shape or coupling. They shall be documented according to table 7, if their recordable limits meet those in figures 3 and 4 (from draft of EN 12680-2).

Table 2: Ultrasonic Signals to be evaluated (Valid for a Frequency of 2 and 4 MHz)

section thickness in discontinuity area mm	reduction of back-wall echo dB	flat bottomed hole diameter mm
≤ 100	> 12	2
> 100 to ≤ 300	> 12	3
> 300 to ≤ 600	> 12	4
areas with severity level 1 like weld preparation ends and sealing faces	-	1.5 ¹⁾
design welding	-	2 ²⁾
1.) Acceptability limits see table 5		
2.) Acceptability limits see figure 5		

• Angle Beam Probes and Twin Crystal Angle Beam Probes

In all casting areas (except design welding) all echo indications with an amplitude height of 6 dB above noise level are to be evaluated according to figure 2 (draft EN 12680-2), if they point at a length and/or depth extension.

Single indications must be evaluated only in quality class 1 areas (acceptability limits see table 5, pr EN 12680-2).

All indications in design welding which reach the reference line must be considered, if they point at a length and/or depth extension. They must be evaluated according to figure 5. Indications without measurable extension can be accepted with maximum 6 mm disc reflector (decision level; compare also clause 15 - tandem testing).



13. Test Procedure

13.1 First Testing after Quality Heat Treatment (Minimum Scope of Inspection)

Table 3: Selection of Transducer for First Testing

Testing areas	Transducer	Scope of Inspection
general casting areas	B2S or MB4S	100 %
section thickness up to 60 mm or at one-sided accessible areas additionally	twin crystal straight beam probe	100 %
severity level 1 – areas like weld preparation ends and sealing faces	TMAPF-60 *or TS-60* twin crystal straight beam probe	100 % in four directions 100 %
severity level 1 – areas section thickness > 60 mm and/ or with one-sided accessibility additionally	MWB45-4 transducer according to figure 1	100 % in four directions 100 % in two circumference directions
Accessible only from outside surface cylindrical areas	TMAPF-60 or TS-60 MWB45-4 transducer according to figure 1	100 % in four directions 100 % in two circumference directions
areas, which cause planar defects e.g. risers, iron chills, radii (concave and convex), cross sections	TMAPF-60 or TS-60 MWB45-4 or MWB60-4 at long sound path distance	100 % in four directions

Remark

If the testing personnel have not detailed description about the casting technology, the castings must be tested - as far as possible - to 100 per cent with the transducer TMAPF-60 or TS-60.

- * TMAPF-60: Twin crystal 60 degree angle probe
 * TS-60 : Single crystal 60 degree angle probe



CORPORATE STANDARD

AA 085 01 07

Rev. No. 00

PAGE 7 OF 22

13.2 Testing after last Heat Treatment (Minimum Scope in Delivery Condition)

Table 4: Selection of Transducer after the last Heat Treatment


Testing areas	Transducer	Scope of Inspection	
accessible radii	TMAPF-60 */ TS-60 *	100 % in four directions	
production welding depth > 30 mm additionally	twin crystal straight beam probe	100 %	
	TMAPF-60 or TS-60	100 % in four directions	
	MWB45-4	100 % in four directions	
evaluation of recordable indications	according to first testing	100 %	
design welding ¹⁾		accessible only from outside surface ²⁾	Accessible from inside and outside surface ³⁾
SECTION THICKNESS ≤ 30 MM	twin crystal straight beam probe	100 %	100 % from outside surface
	TMAPF-60 or TS-60	100 % in four directions	100 % from outside surface
section thickness > 30 mm	TMAPF-60 or TS-60	100 % in four directions	every surface 100 % in four directions
	MWB45-4 and/or WB45-2	100 % in four directions	100 % in four directions
	MWB60-4 and/or WB60-2	100 % in four directions	100 % in four directions
	transducer according figure 1	100 % in two circumference directions	-
	B2S or MB4S	100 %	100 % from one surface
section thickness ≥ 100 mm additionally tandem testing ⁴⁾	MWB45-2; MWB45-2 WB45-2 (10X20); WB45-2	100 % in one direction	100 % in one direction

- 1) For angle transducers all tests are always performed at half skip distance. If the design welding are only accessible from the outside surface the complete testing must be performed in skip distance.
- 2) Select probe for transverse testing eventually according to fig.1
- 3) If welding is accessible from inner and outer surface, test areas can be chosen in such a way that 60% of each of the cross section can be covered.
- 4) The root volume can be exceptionally radiographed after consultation with the customer. In this case the acceptance limits of **Annexure-1** table 2 are valid

* Equivalent transducers are permitted.



Figure 1: Diagram for Determination of Incidence Angle ε as Function of curvature Geometry for Evidence of Cracks at the Opposite Surface

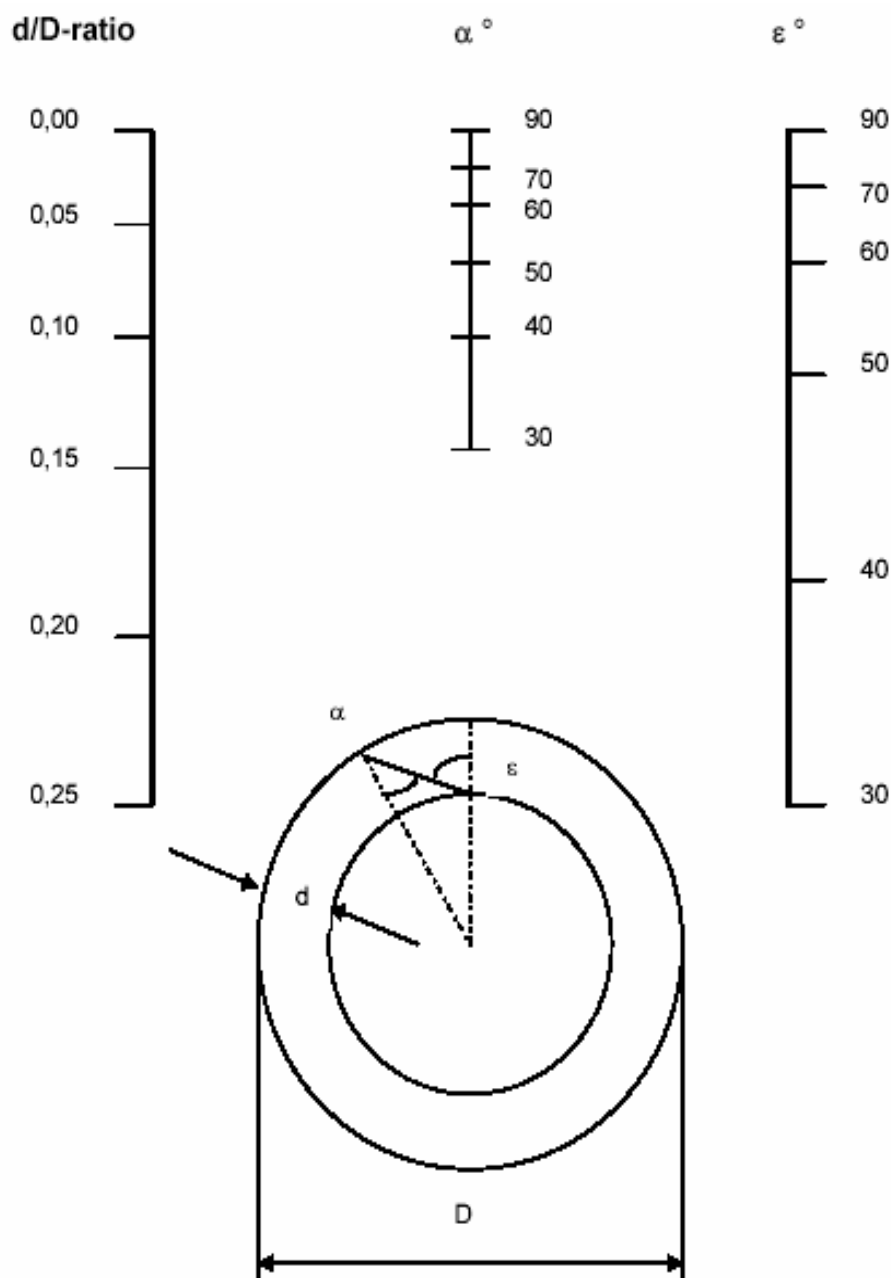

Remark

The incidence angle ε shall range between 35° and 70° , resp., for the evidence of cracks. If this cannot be realized (e.g. thick walled castings), the beam angle of incidence can be chosen exceptionally such way that the centre beam of the sound fields meets the inner surface tangentially (touching entry).



13.3 Selection of Test Frequency

Transducers according to table 3 are to be applied. Transducers with a frequency of 2 MHz are to be used preferably for straight direction of scanning. Transducers with a frequency of 4 MHz are to be used preferably for scanning with angle beam probes and twin crystal angle beam probes.

13.4 Determination of the Sizes of Discontinuities

Further transducers can be used for the evaluation of discontinuities.

Discontinuity dimensions shall be determined with probes with the smallest possible sound beam diameter at the discontinuity location.

Reflectors have only a measured length or depth extension, if their dimension is bigger than the sound beam diameter at the reflector location.

The sound beam diameters of the single transducers depending on path length according to draft EN 12680-2 is shown in **Annexure-2**.

13.4.1 Determination of Discontinuities Sizes mainly parallel to the Surface

The boundaries of discontinuities which meet or exceed the limits according to table 2 are to be identified by moving transducer over the test surface to those positions where the echo height decreases to 6 dB below the last recordable maximum for the discontinuities. The determination of the depth extension is performed as far as possible from opposite sides.

13.4.2 Determination of the Sizes of Discontinuities Perpendicular to the Surface

The determination of depth extensions with twin crystal testing occurs by means of the so-called "tenth value method" (20 dB drop). The depth extension of discontinuities can be determined after examination of the indications normally under consideration of sound path distances by transducer movement where the echo heights reach 100 % and at both sides 10 % (20 dB-drop). This value gives the discontinuity dimension in through-wall direction. The path distances are to be cut in half when 60°-beam direction is applied. The discontinuity length is to be measured according to the half-value method (6 dB drop).

Remark

The measured dimensions in through-wall direction reflect the reality only largely, if there are planar defects, i.e. a "clear" finding can only occur out of two directions.




14. Acceptability Limits

Table 5: Acceptability Limits for Discontinuities without Measurable Dimensions for Example in Weld on Ends and Sealing Faces (Severity class 1) Detected with Normal and Angle Probes

Quality Class	Smallest comparison reflector size to be considered		Acceptability limits ⁴⁾	
	Flat-Bottomed-Hole mm	Side Drilled-Hole mm	Number max.	Distance mm min.
1 ¹⁾	1.5	0.75 ^{2) 3)}	6	12
1) Severity level 1 applies to the complete wall thickness of weld on ends. Indications with measurable dimensions are not permissible for severity level 1. 2) Applicable to angle probes with the frequency of 4 MHz 3) A 0.75 mm diameter side drill hole (SDH) can be represented by a 3 mm diameter SDH, if the distance amplitude correction curve (DAC) of a 3 mm diameter SDH is reduced by 50 % 4) Indications are acceptable irrespective of their number if they are more than 15 mm apart from each other.				



Figure 2: Acceptance Limits for Planar Indications mainly Orientated perpendicular to the Surface Detected with Angle Probes

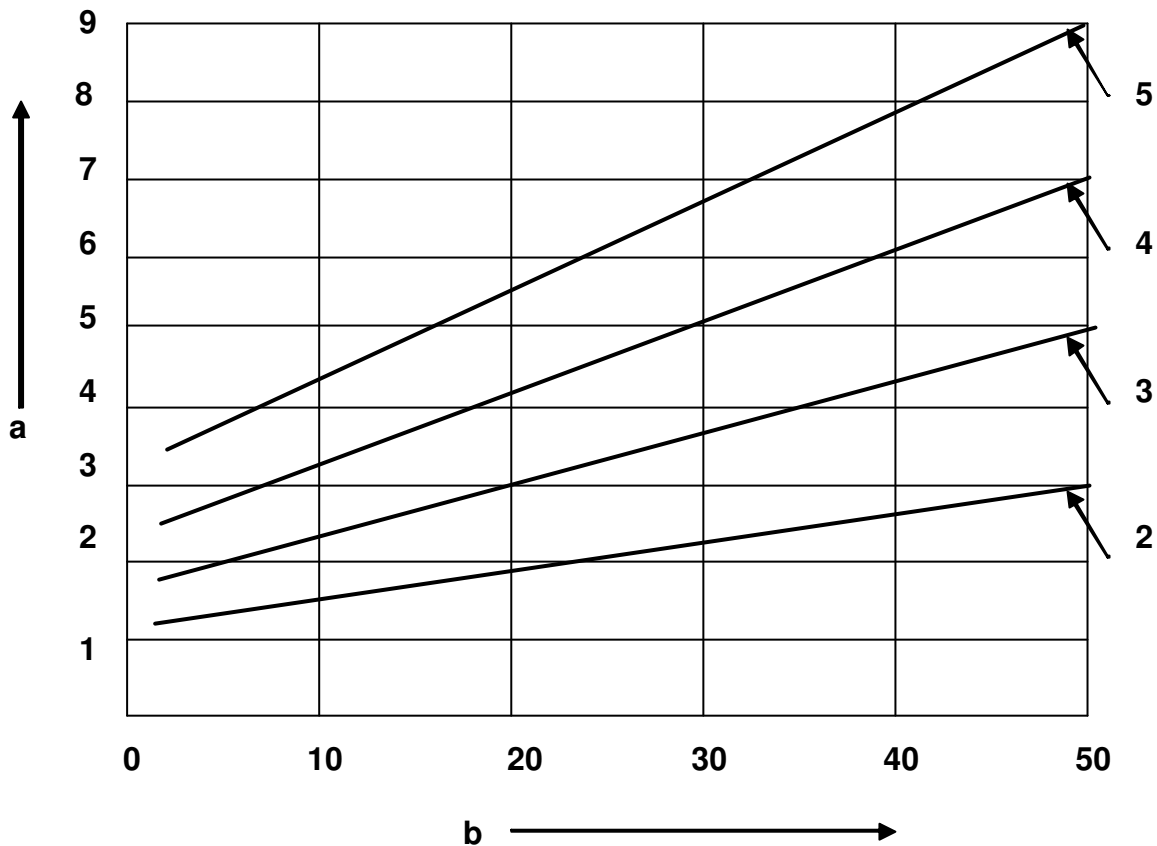

Legend

a: Largest acceptable individual indication area in cm²

b: Distance from test surface in mm

2: Severity level 2

3: Severity level 3

4: Severity level 4

5: Severity level 5

Remark


The maximum depth extension shall not exceed 10 % of the wall thickness, except indications with measurable length ≤ 10 mm. Such indications shall not exceed a depth extension of 25 % of the wall thickness or 20mm, whichever is less. The area A of an indication with measurable length but non-measurable depth extension shall be estimated as follows:

$A = 0.3 \text{ cm} \times \text{measured length in cm [cm]}; \text{ but the maximum acceptable length is 75 mm}$

The minimum distance between indications as criterion for evaluation as an individual indication (or indication area) perpendicular or lateral to the surface shall be 10 mm.



Figure 3: Recording and Acceptance Limits for Non-planar Indications with Measurable Dimensions in the Rim Zone Detected with Normal Probes. (The Rim Zones are defined as 1/3 of Nominal Section Thickness or maximum 30 mm)

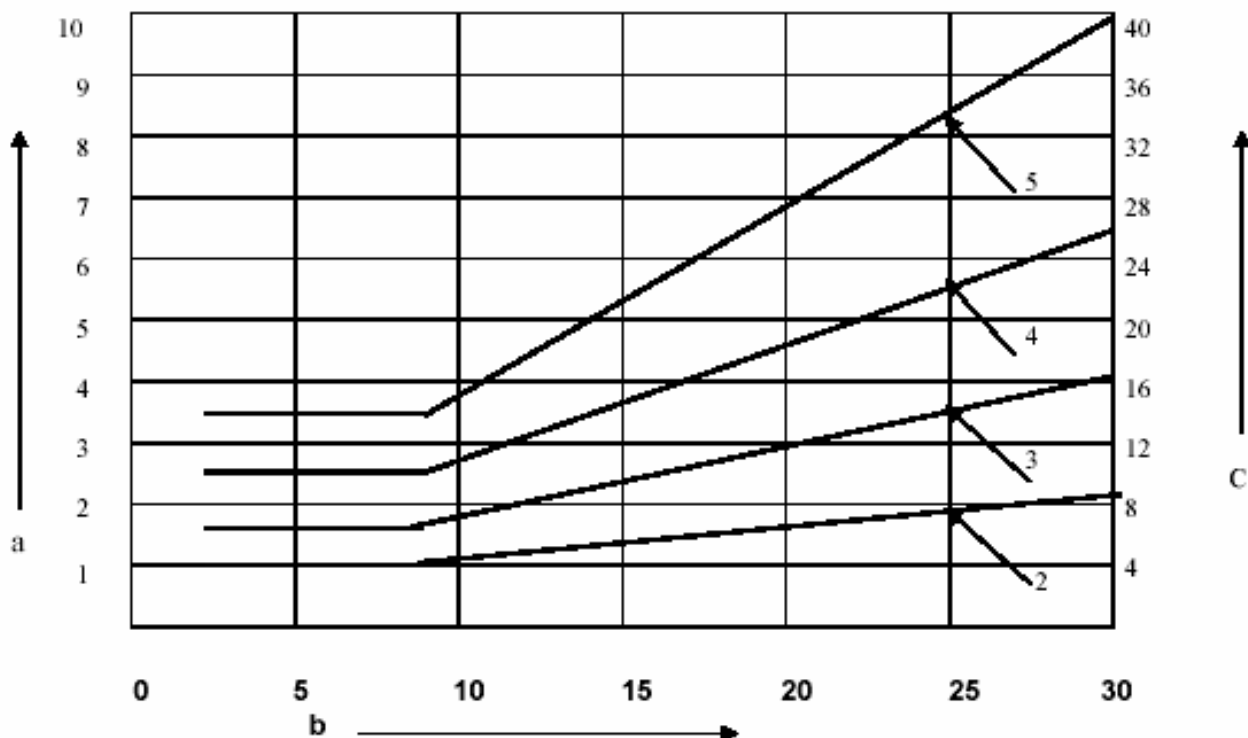

Legends

- a: Smallest indication area to be recorded in cm²
b: Shortest distance from test surface or back wall in mm
c: Largest acceptable individual indication area in cm²
2: Severity level 2 3: Severity level 3
4: Severity level 4 5: Severity level 5

Remark

Special rim zones (severity level 2) are marked in the order drawing; these can be thicker than 30 mm. The maximum acceptable single indication in these areas is 8 cm².

The maximum acceptable depth extension of discontinuities or indication areas shall not exceed 15 % of the rim zone thickness.

The area A of an indication with measurable length but non-measurable depth extension shall be calculated as follow:


A = 0.3 cm x measured length in cm [cm²]; but the maximum acceptable length is 75 mm

The minimum distance between indications as criterion for evaluation as an individual indication or indication area perpendicular or lateral to the surface shall be 10 mm.

If the indication is in the mid zone, which does not exceed 10 % of the section thickness and is classified as a mid zone shrinkage, then, in case of severity level 2 to 4, 50 % higher values than those in the diagram are permitted; **or** unacceptable indications by UT - clearly positioned in the core zone - can be radiographed according to DIN 54111-2. The severity level for RT can be one grade lower as for UT (e.g. level 3 instead of level 2, compare as per **Annexure-1**, table 1).



Figure 5: Acceptance Limits for Indications in Design Weldings Detected with Normal and Angle Probes

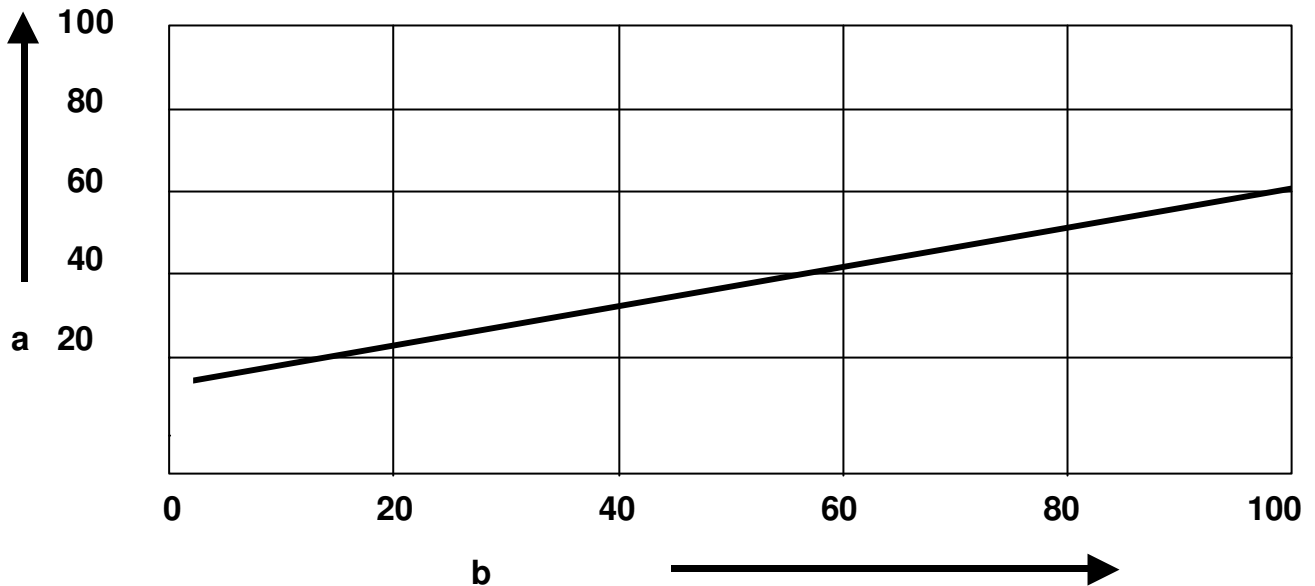

Legend

- a: maximum acceptable reflector length in mm
b: minimum distance from surface in mm

Remark

The maximum acceptable indication length is 60 mm for severity level 2 in design welding with nominal wall thickness > 200 mm.

Every indication which infer to measurable depth extensions as e.g. cracks or binding defects are generally **not** acceptable.

The minimum distance between indications as criterion for evaluation as an individual indication or indication area perpendicular to or lateral to the surface, shall be 20 mm.

Defect lengths (cumulative) are only acceptable up to maximum 3 x a per meter joint weld.

Unacceptable indications by UT can be radiographed according to EN 1435 in comparison to the Ultrasonic test. The evaluation shall be performed according

Annexure-1, table 2.



15. Tandem Testing

- **Distance Calibration**

The probes are arranged at the component to be tested in such a way that the V through sonic echo signal of the component is placed in the center of the UT device screen. This indication corresponds with the distance indication for a reflector in the center of the test zone in question which is perpendicular oriented to the incidence surface. It is to be assured when adjusting the screen signal spreading that a sound path difference of at least 80 mm (640 of through sonic echo) can be evaluated.

- **Sensitivity Calibration**

The sensitivity calibration is done by V through sonic echo at the component. The transfer inconsistency is to be considered for guarantee of the registration limit. For that purpose the V through sonic level in dB is to be determined at least at five representative locations within the test area with constant probe distance.

$$\text{mean value} = \frac{\text{sum of single values}}{\text{number of single values}}$$

The adjusted test sensitivity is the result of the dB value of the basic sensitivity completed with the $\Delta V_{DGS=6\text{ mm}}$ amplification according to the zone classification tables.

All echo indications to be evaluated must be clearly visible on the screen (minimum 2/5 screen height).

- **Probe Distances**

The distances of the probes for the V through sonic echo are defined by the distance Y_v of the sound penetration points at which the through sound indication gain it's maximum echo height. The distances of the probes result for various zone depths when moving both probes until the sound penetration points have reached the distance Y_m .

- **Test Performance**

The manual tandem testing must be performed separately for every depth zone. The coupling of the both probes is to be supervised by watching the noise level.

- **Determination of Reportable Length of Indications**

The reportable length of an indication is defined by the parallel shifting of the probe system until the echo decreases by 12 dB on both sides.

- **Registration of Indications**

For registration of indications the echo height which exceeds the registration limit of 6mm DGS by 6 dB and the corresponding depth position of the zone must be reported about.

Further details for documentation see clause 16.



Zone Classification for the Probes MWB45-2

wall thick- ness	zone	b_o [mm]	b_m [mm]	b_u [mm]	y_m [mm]	$\Delta V_{KSR=6mm}$ [dB]	S_{ges} [mm]
100	1	15	28	37	144	13.5	283
	2	37	55	62	90	16.5	283
	3	62	75	85	50	17	283
110	1	15	31	41	158	12	311
	2	41	61	68	98	16.5	311
	3	68	82	93	56	17.5	311
120	1	15	33	40	174	11.5	340
	2	40	63	73	114	15.5	340
	3	73	90	105	60	18	340
130	1	15	36	43	188	12	368
	2	43	68	79	124	16.5	368
	3	79	97	115	66	18.5	368
140	1	15	39	47	202	14	396
	2	47	80	93	120	20	396
	3	93	111	125	58	21	396
150	1	15	42	50	216	14.5	425
	2	50	86	100	128	21	425
	3	100	119	135	62	22	425

b_o = distance from the test surface to the upper zone boundary in [mm]

b_m = distance from the test surface to the zone center in [mm]

b_u = distance from the test surface to the lower zone boundary in [mm]

y_m = distance of sound penetration points at parallel surfaces in [mm]

$\Delta V_{KSR6 mm}$ = add on to basic sensitivity in [dB]

S_{ges} = total sound path between sender and receiver in [mm]



CORPORATE STANDARD

AA 085 01 07

Rev. No. 00

PAGE 17 OF 22

Zone Classification for the Probes MWB45-2

wall thick- ness	zone	b_o [mm]	b_m [mm]	b_u [mm]	y_m [mm]	$\Delta V_{KSR=6mm}$ [dB]	S_{ges} [mm]
160	1	15	27	42	266	21.5	452
	2	42	56	68	208	21.5	452
	3	68	81	94	158	23	452
	4	94	107	120	106	24	452
	5	120	131	145	58	24.5	452
170	1	15	29	45	282	22	481
	2	45	59	72	222	22	481
	3	72	86	100	168	23.5	481
	4	100	114	127	162	24.5	481
	5	127	139	155	62	25	481
180	1	15	31	48	298	22.5	509
	2	48	62	76	236	22.5	509
	3	76	91	106	178	24	509
	4	106	121	134	118	25	509
	5	134	147	165	66	25.5	509
190	1	15	33	51	314	23	537
	2	51	65	80	250	23	537
	3	80	96	112	188	24.5	537
	4	112	128	141	124	25.5	537
	5	141	155	175	70	26	537
200	1	15	27	37	346	19.5	566
	2	37	52	63	296	20.5	566
	3	63	79	93	242	23.5	566
	4	93	109	124	182	24.5	566
	5	124	139	154	122	25	566
	6	154	169	185	62	25.5	566

b_o = distance from the test surface to the upper zone boundary in [mm]

b_m = distance from the test surface to the zone center in [mm]

b_u = distance from the test surface to the lower zone boundary in [mm]

y_m = distance of sound penetration points at parallel surfaces in [mm]

$\Delta V_{KSR6\text{ mm}}$ = add on to basic sensitivity in [dB]

S_{ges} = total sound path between sender and receiver in [mm]



Zone Classification for the Probes MWB45-2
(transducer size 10X20; 20X22)

wall thick- ness	zone	b_o [mm]	b_m [mm]	b_u [mm]	y_m [mm]	$\Delta V_{KSR=6mm}$ [dB]	S_{ges} [mm]
210	1	15	28	39	364	19.5	594
	2	39	55	66	310	21	594
	3	66	83	98	254	24	594
	4	98	114	130	192	25	594
	5	130	146	162	128	25.5	594
	6	162	177	195	66	26.5	594
220	1	15	29	41	382	19.5	622
	2	41	58	69	324	21	622
	3	69	87	103	266	24	622
	4	103	119	136	202	25.5	622
	5	136	153	170	134	26.5	622
	6	170	185	205	70	27.5	622
230	1	15	31	43	398	20	650
	2	43	61	72	338	21.5	650
	3	72	91	108	278	24.5	650
	4	108	124	142	212	26	650
	5	142	160	178	124	27	650
	6	178	193	215	74	28	650
240	1	15	32	49	416	22.5	679
	2	49	67	80	346	22	679
	3	80	101	117	278	25.5	679
	4	117	135	153	210	27	679
	5	153	170	188	140	28	679
	6	188	204	225	72	28.5	679
250	1	15	33	51	434	22.5	707
	2	51	70	83	360	22.5	707
	3	83	105	122	290	26	707
	4	122	141	159	218	28	707
	5	159	177	196	146	28.5	707
	6	196	212	235	76	28.5	707

b_o = distance from the test surface to the upper zone boundary in [mm]

b_m = distance from the test surface to the zone center in [mm]

b_u = distance from the test surface to the lower zone boundary in [mm]

y_m = distance of sound penetration points at parallel surfaces in [mm]

$\Delta V_{KSR6 \text{ mm}}$ = add on to basic sensitivity in [dB]

S_{ges} = total sound path between sender and receiver in [mm]



CORPORATE STANDARD

AA 085 01 07

Rev. No. 00

PAGE 19 OF 22

16. Documentation

The test report must contain the following information:

- supplier's name
- Identification of the test component on every page
- Condition of casting at the time of examination
- Material
- Surface conditions
- Ultrasonic test device, identification of the applied transducers (type, frequency, angle)
- Sound velocities, minimum detectable flaw size if necessary
- Values of sound path distance and sensitivity calibration according to table 6
- Name, certification and signature of the supervisor
- Recordable indications must be documented according to table 7 and must be documented in sketches which show the positions at the casting and the size of their indication
- Indications beyond acceptance level must be documented in sketches (to scale) to allow proper evaluation and when possible clearance for special acceptance.



CORPORATE STANDARD

AA 085 01 07

Rev. No. 00

PAGE 21 OF 22

Table 1: Maximum Permissible Discontinuities of Radiographic Testing in comparison to the Ultrasonic Testing from the Basic Material of the Casting

Defect				Maximum permissible defect for Quality class	
Type	Code letter as in ASTM ¹⁾	For section thickness in mm	Assessment as in ASTM ¹⁾	2	3
Blowholes	A	up to 50 over 50 up to 115 over 115 up to 300	E446 E186 E280	A3 A3 A3	A4 A4 A4
Non-metallic inclusions	B	up to 50 over 50 up to 115 over 115 up to 300	E446 E186 E280	B3 B3 B3	B4 B4 B4
Shrinkage	C	up to 50 over 50 up to 115 over 115 up to 300	E446 E186 E280	Ca3, Cb3, Cc3, Cd3 Ca3, Cb3, Cc3 Ca3, Cb3, Cc3	Ca4, Cb4, Cc4, Cd4 Ca4, Cb4, Cc4 Ca4, Cb4, Cc4


1) ASTM-E 446 Standard reference radiographs for steel castings up to 2 in. (51 mm) in thickness
 ASTM-E 186 Standard reference radiographs for heavy walled 2 to 4 ½ in. (51 to 114 mm) steel castings
 ASTM-E 280 Standard reference radiographs for heavy walled 4 ½ to 12 in. (114 to 305 mm) steel castings

Table 2: Acceptance Limits for Discontinuities in Design Welding of Radiographic Testing in Comparison to the Ultrasonic Testing

Section thickness t mm	Maximum length of indications mm
≤ 10	7
> 10 to ≤ 75	1/2 t
> 75 to ≤ 200	1/3 t



ANNEXURE-2

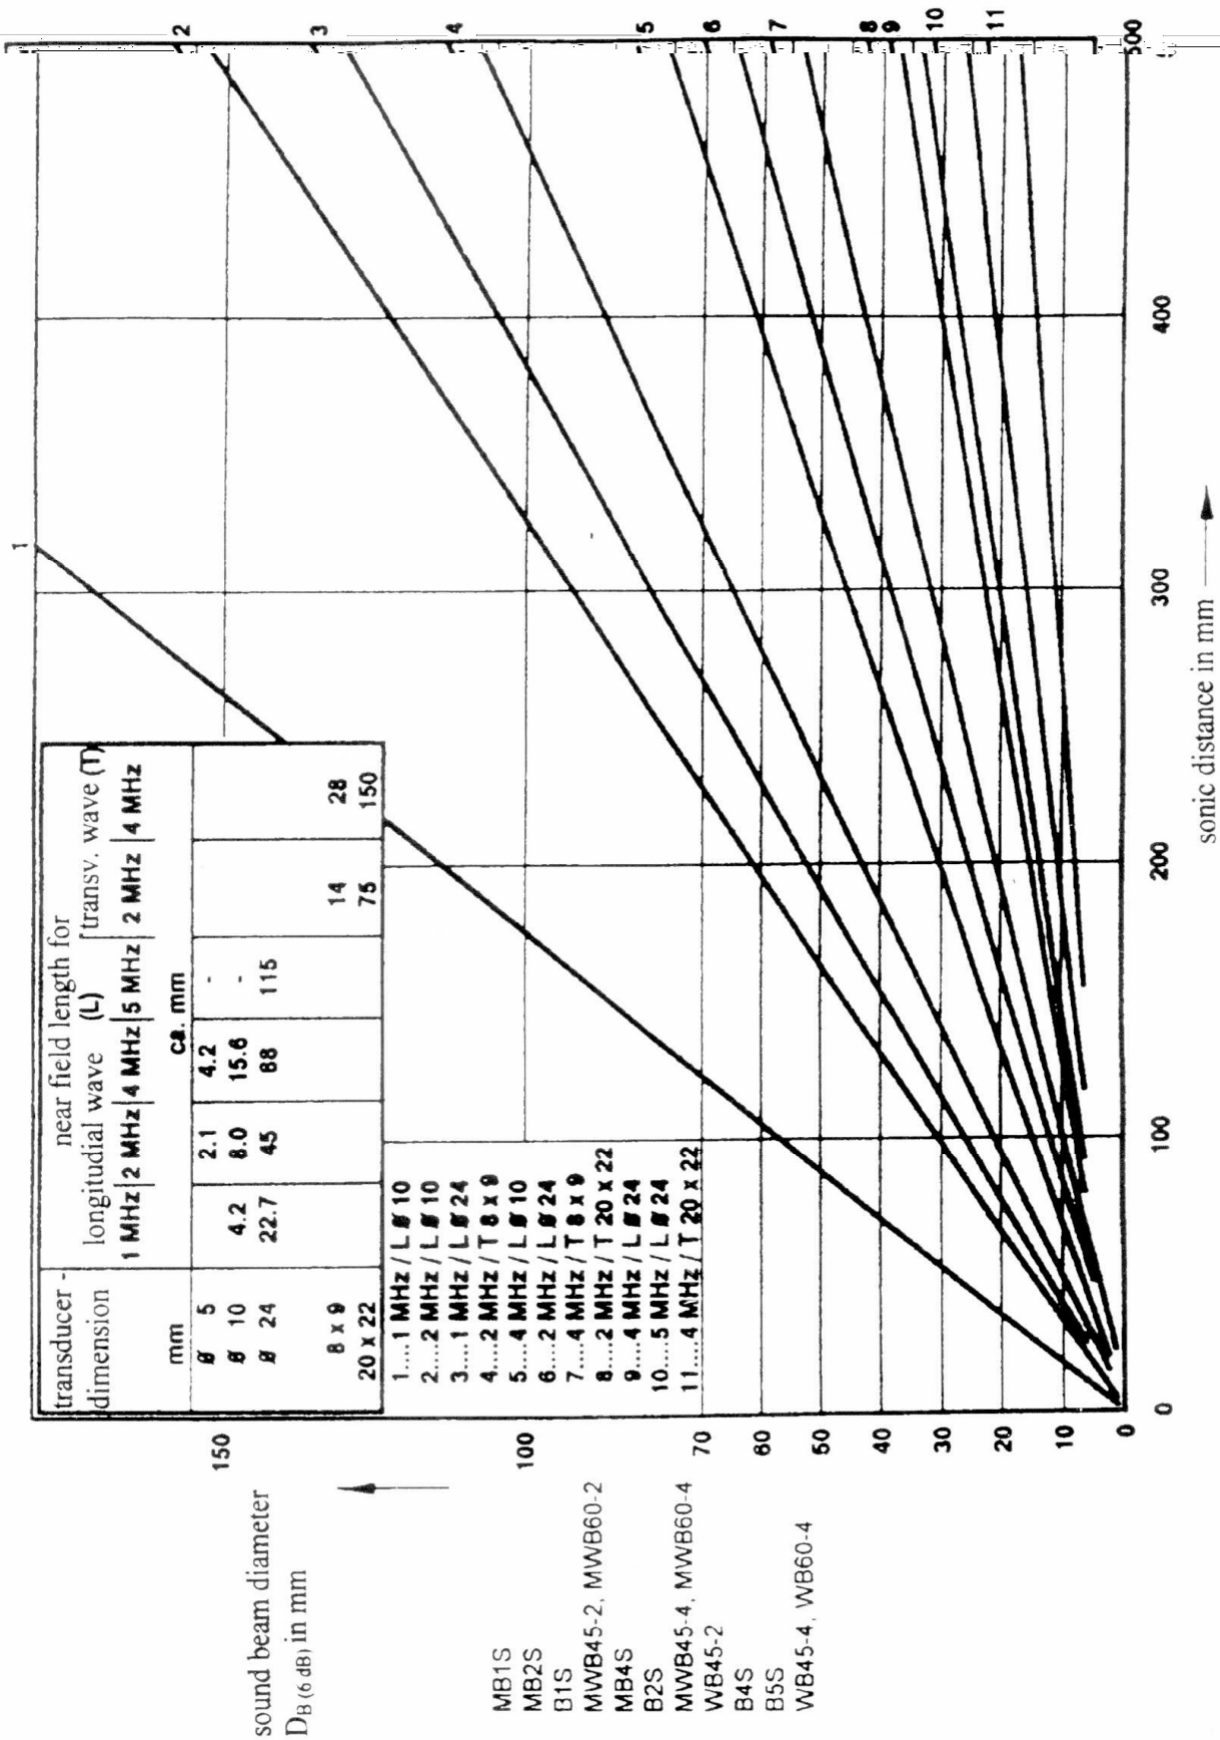

Approximation value of the near field length and the sound beam diameter (-6 dB) in the far field of usual transducers in dependence of the sonic distance.



CORPORATE STANDARD

AA 085 01 08

Rev.No. 00

PAGE 1 OF 11

Surface Crack Testing of Steel Castings and Nodular Iron Casting

	List of Contents	Page
1	Scope of Application	2
2	Referenced Documents	2
3	Inspection Purpose	2
4	Date and Scope of Inspection	2
5	Testing Personnel	2
6	Inspection Surfaces	3
7	Test Requirements	3
8	Test Media	3
9	Test Equipments & Control Equipments	3
10	Viewing Conditions	3
11	Test Procedure	4
11.1	Magnetic Particle Test	4
11.2	Liquid Penetrant Test	5
12	Definition of Indication	
13	Classification of the indications and interpretation of results	5
14	Acceptability Limits for Magnetic Particle Test	6
15	Acceptability Limits for Liquid Penetrant Test	7
16	Documentation	8
	Annexure 1	9
	Annexure 2	10

Revisions:

Cl. 33.1.0 of MOM of FC&F+HTM

APPROVED:

INTERPLANT MATERIAL RATIONALISATION
COMMITTEE-MRC (FCF+HTM)

Rev. No. 00	Amd.No.	Reaffirmed:	Prepared	Issued	Dt. of 1st. Issue
Dt:	Dt :	Year :	HARIDWAR	Corp. R&D	FEB. 2008

AA 085 01 08	CORPORATE STANDARD	
Rev. No. 00		
PAGE 2 OF 11		

1. Scope of Application

This instruction applies to the surface crack testing (MT, PT) of nodular iron components and steel casting components including production welding e.g. as barrel type casings, inner casings, outer casings, valves, guide blade (vane) carriers, etc. This specification also covers design welding between two cast components and between casting and forging components.

2. Referenced Documents

EN 473, SNT TC 1A, EN 571-1, EN 1289, EN 1290, EN 1291, EN 1369, EN 1370, EN 1371-1, pr EN 1956, EN ISO 3452-3

3. Inspection Purpose

Examination of surface discontinuities caused by manufacturing

4. Stage and Scope of Inspection

Steel Castings

A **fluorescent** magnetic particle examination at

- all inside and outside surfaces after quality heat treatment
- all excavations after removing of unacceptable indications
- all inside and outside surfaces after the last heat treatment in delivery conditions

The quality department has to prepare detailed sketches with the applied clip technique adjusted to the casting to be checked when using stationary magnetic particle test equipment (magnetization of the complete casting or sections of it). These sketches shall be available for the inspection.

Nodular Iron Castings

A **fluorescent** or “**black and white**”magnetic particle examination shall be performed in the double hatched areas (areas with higher requirements; severity level 3 and better) in delivery conditions i.e. in as cast condition or, if carried out, after ferritic heat treatment.

In case of excess material in the testing areas which will be machined off in the final shape, the surface crack testing can be omitted.

Remark for Steel Castings and Nodular Iron Castings

A liquid-penetration test according to EN 571-1 may be applied:

- in areas, which are not accessible for a magnetic particle test
- in areas, which cannot be magnetized sufficiently due to geometry or accessibility
- in case of not interpretable magnetic particle indications
- at non magnetic build-up welding e.g. stellited areas

A detailed description of the test procedure is shown under clause 11.

5. Testing Personnel

The testing shall be carried out with test personnel having certification according to EN 473, according to SNT-TC-1A, or according to any other equivalent international standard for the used method. Following certification levels are prescribed:

- Operator: minimum level 1 for the used method
- Supervisor: minimum level 2 for the used method



CORPORATE STANDARD

AA 085 01 08

Rev. No. 00

PAGE 3 OF 11

An actual list of the operators with the required certifications is to be sent to the customer and must be kept up to date.

6. Inspection Surfaces

The inspection surface must be free from dust, scaling, residual molding material and shot-blast material.

• Steel Castings

Unless otherwise specified in the material specification, the surface condition in the tested areas must meet the minimum requirements 4S1 (for shot-blast areas) and 4S2 (for ground areas) of BNIF 359 according to EN 1370.

In case of design welding, the root area and the final pass must be ground smoothly or must be machined.

• Nodular Iron Castings

Unless otherwise specified in the material specification, the surface condition in the tested areas (severity level 3 and better) must meet the minimum requirements 4S1 (for shot-blast areas) and 4S2 (for ground areas) of BNIF 359 according to EN 1370.

7. Test Requirements

The testing shall be carried out with naked eye.

8. Test Media

• Magnetic Particle Test

Water soluble fluorescent test suspension with rust protection (grain size < 5 µm)

• Liquid Penetration Test

Colour liquid penetration medium, water or cleaner, wet developer. The test media must be compatible to each other.

9. Test Equipment and Control Equipment (Equivalents are also permitted)

• Magnetic Particle Test

- magnetic particle equipment
- MTU comparison piece
- Castrol indicators, indicator A3 (ASTM E 709), or device for tangential field strength
- UV-lamp

• Liquid Penetration Test

- calibration block 2 according to EN ISO 3452-3 for checking the system power when using other means than spray cans.



10. Viewing Conditions

• Magnetic Particle Test

The UV-A radiation must be higher than 10 W/m^2 on the test surface of the casting. The lighting strength of the white light must be higher than 20 lx on the test surface of the casting. The foundries must ensure the above mentioned values in the testing areas. This can be done with darkening means, e.g. tents or black tent cloths.

• Liquid Penetration Test

The test is to be performed under natural or artificial illuminating conditions. The test area shall be illuminated steadily. Blinding must be avoided. The lighting strength of the white light on the test surface must be higher than 500 lx.

11. Test Procedure

The severity levels in the different casting areas are shown in the order drawings. All indications, which exceed the acceptability limits of clause 13 and 14 shall be excavated to a flawless base material. A severity level 1 shall be reached for a production welding. The production welding shall be performed according the instruction for the specification of a production welding on castings. Any production welding on nodular iron castings are only allowed with the approval of the customer.

11.1 Magnetic Particle Test

- check the test suspension before testing and when changing the test suspension
- check for sufficient magnetization with Castrol indicators, indicator A3 (ASTM E 709) or measurement of the tangential field strength (reference value 20 – 64 A/cm)
- check of residual magnetization ($< 8 \text{ A/cm}$) at the end of the testing; a demagnetization shall be done for residual field strength $> 8 \text{ A/cm}$

• Steel Castings

- Application of direct current or half wave rectified alternating current; the application of yokes shall be used exceptionally.
- magnetization of an area (about 25 cm x 25 cm) by magnetic flux linkage technique shall be done in two perpendicular directions when applying consumable electrodes or magnetization by magnetic flux linkage technique when applying stationary magnetic particle test equipment (magnetization of the complete casting or sections of it). In this case detailed sketches with the applied clip technique must be prepared for the pattern Nos.
- time of magnetization by wetting $> 3 \text{ sec}$
When applying stationary magnetic particle test equipment (magnetization of the complete casting or sections of it) the wetting must be ensured during the complete magnetization.
- subsequent time for magnetization $> 3 \text{ sec}$

• Nodular Iron Castings

- application of alternating current
- magnetization of an area with yokes or consumable electrodes in two perpendicular directions
- time of magnetization by wetting $> 3 \text{ sec}$
- subsequent time for magnetization $> 5 \text{ sec}$



CORPORATE STANDARD

AA 085 01 08

Rev. No. 00

PAGE 5 OF 11

Remark for Steel Castings and Nodular Iron Castings

The checking of the surfaces with UV-lamp shall be done under simultaneous magnetization when using yokes or consumable electrodes. Therefore, if the casting is magnetized and checked in sections, indications with length > 3 mm or diffuse shining indications must be checked once more accurately. When using this procedure, care must be taken also for those areas, which have been already tested. They shall not be again flown over with test suspension.

Arc spots (not to mix up with contact points) shall not result on the casting when using consumable electrodes. Arc spots are not acceptable. They must be removed and rechecked.

11.2 Liquid Penetration Test

The procedure of the test sequence is fixed as follows:

- If necessary, the pre-cleaning shall be done with chemical cleaning media
- complete drying so that neither water nor solvent remains in the surface defects.
- The dye penetration medium can be applied by spray, brush or dip. It is to be assured that the test area will be kept wet during the complete penetration period.
The casting temperature shall be 5° C – 50° C.
The penetration time shall be 10 – 15 minutes.
- The excess material of the dye penetrant shall be removed by a suitable procedure.
(spraying or wiping with a cloth which do not fluff)
- The drying of the test area must be done quickly after removal of the excess dye penetration material. Therefore cloth which is clean, dry and do not fluff or compressed air are suitable; compressed air must be free from water and oil
- The developer must be put on steadily by spraying, so that the test area is even humid and yield a thin steady film.
- The developing time shall be 10 – 15 minutes.
- The first inspection shall be done immediately after the application of the developer. The final inspection shall be done after the developing time.

Remark

If a new test is necessary, e.g. a definite evaluation of the indications was not possible, the entire process of the liquid penetration test must be performed again beginning with the pre-cleaning. The use of other dye penetration or of a similar one from another supplier is not at all allowed.

12. Definition of Indications

On BHEL ordering drawing, quality level of the casting is indicated as 1, 2 or 3. For example, quality level 3 for magnetic particle test means that acceptability limit shall meet the characteristics SM3, LM3 and AM3 according to tables 1 and 2.

• **Non Linear Indications (SM), (SP) or (CP)**

The indications are considered to be non-linear when the length L is smaller than three times the width W.

?



- **Linear Indications (LM), (LP)**

The indications are considered to be linear when the length L is larger than or equal to $3W$.

- **Aligned Indications (AM), (AP)**

Indications are considered to be aligned in the following cases:

- non-linear : the distance between indications is less than 2 mm and at least three indications are noted
- linear : the distance between two indications is smaller than the length L of the longest discontinuity in the alignment

Indications arranged such in a line are considered to be one common indication. Its length is equal to the overall length L of this alignment.

Description of abbreviations

SM: S for surface and M for magnetic particle ;

SP: isolated indications at liquid penetration test

CP: area of multiple indications; The distance between the indications cannot be measured (they seem to form only one indication)

LM: L for linear and M for magnetic particle;

LP: L for linear and P for liquid penetration test

AM: A for aligned and M for magnetic particle;

AP: A for aligned and P for liquid penetration test

13. Classification of the indications and interpretation of results

13.1 General

In order to classify a discontinuity indication, it is necessary to place a 105mmX148mm frame in the most unfavourable location, i.e. showing the greatest severity for discontinuities.

13.2 Non linear Indications

Only those indications with a length greater than L_1 shall be taken into account (see tables 1 and 4). The sum of the surface areas of these indications shall be calculated. The length of these indications shall be measured.

13.3 Linear and Aligned Indications

The length L of the isolated indications greater than the minimum length taken into account, defined by the required severity levels, shall be measured. The sum of the indications included in the 105mmX148mm frame shall be calculated.



CORPORATE STANDARD

AA 085 01 08

Rev. No. 00

PAGE 7 OF 11

14. Acceptability Limit for the Magnetic Particle Test

Table-1: Acceptability Limits for Non-Linear Indications(SM)

Characteristic		Severity Levels			
		SM 1	SM 2	SM 3	SM 4
Length L ₁ of the smallest indication to be considered in mm		1.5	2	3	4
Non-linear indications (SM)	maximum total surface area allowed in mm ²	10	35	70	200
	maximum individual length L ₂ allowed in mm	2 ¹⁾	4 ¹⁾	6 ¹⁾	10 ¹⁾

1) A maximum number of 2 indications of the designated maximum dimension are permitted.

Table 2: Acceptability Limits for Linear Indications (LM) and Aligned Indications (AM)

Characteristic		Severity Levels							
		LM 1 AM 1		LM 2 AM 2		LM 3 AM 3		LM 4 AM 4	
Length L ₁ of the smallest indication to be considered in mm		1.5		2		3		4	
Arrangement of indications ¹⁾ isolated (I) or cumulative (C)		I	C	I	C	I	C	I	C
Maximum length L ₂ of linear (LM) and aligned (AM) indications allowed depending on the section thickness t, in mm	Section thickness t ≤ 16 mm	2	4	4	6	6	10	10	18
	Section thickness 16 mm < t ≤ 50 mm	3	6	6	12	9	18	18	27
	Section thickness t > 50 mm	5	10	10	20	15	30	30	45

1) The linear and aligned indications shall be taken into consideration for the calculation of the cumulative length.

Table 3: Acceptability Limits for Indications in Design Welding

Characteristic	
Linear indications l length of indications in mm	1.5
Non-linear indications d greatest diameter in mm	3

Groups of acceptable individual indications shall be considered unallowable when they exceed the following limits:

$\Sigma l/s$ for L = min. (12s; 150 mm)

In words this means:

Depending on which value is smaller, over a weld length of 150 mm or the length corresponding to twelve times the wall thickness, the cumulative length of several adjacent indications may not exceed the wall thickness. This however only applies to indications which are otherwise acceptable owing to their distance from each other and their individual lengths.

15. Acceptability Limits for the Liquid Penetration Test

Table 4: Acceptability Limits for Non Linear Indications, Isolated (SP) or Clustered (CP)

Characteristic	Severity Levels			
	SP 1 CP 1	SP 2 CP 2	SP 3 CP 3	SP 4 CP 4
Length L_1 of the smallest indication to be considered in mm	1.5	2	3	5
Maximum number of non-linear indications allowed	8	8	12	20
Maximum size of discontinuity indication allowed in mm				
- isolated indications (SP)	3	6	9	14
- clustered indications (CP)	10	16	25	-

Table 5: Acceptability Limits for Linear Indications (LP) and Align Indications (AP)

Characteristic		Severity Levels							
		LP 1 AP 1		LP 2 AP 2		LP 3 AP 3		LP 4 AP 4	
Length L_1 of the smallest indication to be considered in mm		1.5		2		3		4	
Arrangement of indications ¹⁾ isolated (I) or cumulative (C)		I	C	I	C	I	C	I	C
Maximum length L_2 of linear (LP) and aligned (AP) indications allowed depending on the section thickness t , in mm	Section thickness $t \leq 16$ mm	2	4	4	6	6	10	10	18
	Section thickness $16 \text{ mm} < t \leq 50$ mm	3	6	6	12	9	18	18	27
	Section thickness $t > 50$ mm	5	10	10	20	15	30	30	45
1) The linear and aligned indications shall be taken into consideration for the calculation of the cumulative length.									

Table 6: Acceptability Limits for Indications in Design Welding

Characteristic	
Linear indications l length of indications in mm	2
Non-linear indications d greatest diameter in mm	6

Groups of acceptable individual indications shall be considered unallowable when they exceed the following limits:

$$\Sigma l \geq s \text{ for } L = \min. (12s; 150 \text{ mm})$$

In words this means:

Depending on which value is smaller, over a weld length of 150 mm or the length corresponding to twelve times the wall thickness, the cumulative length of several adjacent indications may not exceed the wall thickness. This however only applies to indications that are otherwise acceptable on the basis of their distance from each other and their individual lengths.



CORPORATE STANDARD

AA 085 01 08

Rev. No. 00

PAGE 9 OF 11

15. Documentation

The test report must contain the following information:

- supplier's name
- Identification of the component on every page
- Condition of casting at time of examination
- Material
- Surface conditions
- Place, date, signature of the operator
- Name, certification and signature of the supervisor

Magnetic Particle Test

- test method, designation of applied equipment
- mode of magnetization
 - Yoke magnetization (J)
 - magnetization by current flowed through conductor (L)
 - magnetization by fixed coils (LS)
 - magnetization by movable conductor (LK)
 - magnetic flux linkage technique (S)
 - self magnetic flux linkage technique (SS)
 - induction magnetic flux linkage technique (SI)
- test media

The magnetic particle inspection document shall be furnished according to **Annexure-1**.

Liquid Penetration Test

Description of the used liquid penetration system with manufacturer's trademark, product explanation and the batch-No. of the test media.

The liquid penetration inspection document shall be furnished according to **Annexure-2**.



Annexure-1

Model of a Magnetic Particle Inspection Document according to EN 1369

Company	Magnetic Particle Inspection Document		No.	
			Page	
			According to	
Customer	Order No.			
Specification	Material		Heat No.	
Identification	Quantity	Casting designation	Lot No.	Drawing No.
area examined 100% testing scheme cavity root				
Stage after heat treatment before stress relieving				
testing conditions				
apparatus				
magnetic particle reference				
surface condition shot blasted ground machined				
magnetization method				
testing material				
rod spacing		mm		
magnetizing current		A		
type of current alternating direct				
tangential field strength		A/mm		
field indicator				
testing results				
according to				
non-conformable note				
continuation sheet				
inspection authority				
quality assurance section				
date/place				
signature of operators				
signature of QA manager				

If applicable, tick the relevant box.



CORPORATE STANDARD

AA 085 01 08

Rev. No. 00

PAGE 11 OF 11

Annexure-2

Model of a Liquid Penetration Inspection Document according to EN 1371-1

Company	Liquid Penetration Inspection Document		No.	
			Page	
			According to	
Customer	Order No.			
Specification	Material		Heat No.	
Identification	Quantity	Casting designation	Lot No.	Drawing No.
area examined 100% testing scheme cavity root				
Stage after heat treatment before stress relieving				
Dye penetrant Trade mark Batch no.				
Excess penetrant remover Trade Mark Batch no.				
Developer Trade mark Batch no.				
testing conditions				
surface condition: shot blasted / ground / machined				
Casting Temperature : 58C to 148C / 158C to 358C / 368C to 558C				
Pre-cleaning yes / no				
Penetrant application: brush / spray / dip				
Penetration time minutes				
Penetration removal cleaning with water / solvent				
Drying time minutes				
Drying temperature 8C				
developer application: brush / spray / wet / dry				
developing time minutes				
illumination: Natural / artificial				
testing results				
according to				
non-conformable note				
continuation sheet				
inspection authority				
quality assurance section				
date/place				
signature of operator				
signature of QA manager				

if applicable, tick the relevant box.



PLANT PURCHASING SPECIFICATION HYDERABAD

HY19569

Rev. No. 05

Page 1 of 7

CARBON STEEL CASTINGS FOR GENERAL PURPOSE GRADE : GP 240 GH

1.0 GENERAL :

This specification governs the quality requirements of carbon steel castings of grade GP 240-GH.

2.0 APPLICATION :

These castings are required for various components of steam turbines, turbo-generators and pumps etc.

3.0 CONDITION OF DELIVERY :

Unless otherwise specified in the purchase order or ordering drawing, the castings shall be supplied in normalised or normalised and tempered or quenched & tempered, rough machined, stress relieved and shot blasted condition.

4.0 COMPLIANCE WITH NATIONAL STANDARDS :

This specification complies in general with DIN EN 10213-2008-01, Gr: GP240 GH.

5.0 DIMENSIONS AND TOLERANCES :

5.1 Dimensions:

The enclosed drawings are finish machined ones (unless otherwise specified). Unless otherwise specified, the castings shall be supplied in rough machined condition with an allowance of 3 to 5 mm on the surfaces where machining symbols have been shown on the drawing. Small grooves, steps etc., up to 50 mm (width or size), need not be rough machined.

5.2 Tolerances:

If not specified in the purchasing documents, the general tolerances according to DIN 1683, Grade GTB 19 are applicable.

6.0 MANUFACTURE:

General requirements:

The steel shall be manufactured by an electric melting process or by any other process involving secondary refining. Surface finish of the machined surface shall be as per ordering drawing.

Revisions: Revised Cl. 3.0, 7.0, 8.0, 17.0 and added Cl. 11.1, 12.1 and 15.0

Issued By:
STANDARDS ENGINEERING & IPR COORDINATION
DEPARTMENT

Rev. No. 05

Amd. No.

Reaffirmed:

Prepared:

Approved:

Date of 1st issue:

Dt. April. 2014

Dt.

Year:

Matls. Engg.

GM (Engg.)

DEC. 1983

PLANT PURCHASING SPECIFICATION HYDERABAD



7.0 HEAT TREATMENT:

The heat treatment shall be carried out at suitable temperatures to achieve the desired properties. Reference may be taken from DIN EN 10213-2008-01, Gr: GP240 GH

The actual heat treatment cycles followed shall be reported in the test certificate.

8.0 FREEDOM FROM DEFECTS:

8.1 Supplier shall ensure that the casting is free of defects like porosity, shrinkage, cracks etc., in the areas which will be subsequently machined at BHEL.

8.2 In case where pressure tightness is called for (though the test may be conducted at BHEL) the required quality shall be ensured to guarantee the same.

8.3 As cast surfaces shall be free from harmful foundry defects like slag inclusions, sand spots, cold shuts, shrinkage, scabs etc.

8.4 Cracks are not permitted on any surface of the castings.

9.0 CHEMICAL COMPOSITION :

The heat analysis of steel shall conform to the following in weight %:

Element		C	Si	Mn	Cr	Ni	S	P	Mo	Cu	V
Melt analysis	Min	0.18	-	0.50	-	-	-	-	-	-	-
	Max.	0.23	0.60	1.20	0.30	0.40	0.020	0.030	0.12	0.30	0.03
Permissible variation		±0.02	+0.10	-0.06 +0.10	-	-	+0.005	+0.005	-	-	-

Note:

1) The total content of specified residual elements (Ni, Cr, Mo, Cu and V) shall be 1.00% maximum. These residual elements shall be reported in test certificate.

10.0 TEST SAMPLES:

10.1 When integral piece is called for in the drawing/ purchase order (for castings weighing less than 500Kgs), the test coupon shall be cast at a place of maximum section thickness or any position where casting quality is not affected. Otherwise, separate test coupons shall be cast from the same melt from which the castings are poured.

However, integral keel blocks shall necessarily be provided for each casting weighing 500 kg or more.



PLANT PURCHASING SPECIFICATION HYDERABAD

HY19569

Rev. No. 05

Page 3 of 7

- 10.2** The number of keel blocks to be integrally cast with each casting shall be sufficient to test the various properties, both at the supplier's ends and at BHEL to carry out repeat tests if required. Sufficient material in the form of integrally cast keel block or separately cast test coupon duly identified and stamped by BHEL representative shall be sent to BHEL for re-testing at BHEL works.
- 10.3** The integrally cast test coupons shall not be removed prior to complete heat treatment and they shall be suitably stamped and identified by BHEL representative.
- 10.4** Separate test coupons shall be heat treated along with the casting they represent during each subsequent heat treatment of the castings and they shall be properly stamped and identified.
- 10.5** Testing shall be done per melt and per heat treatment batch in case of separate cast test coupons and individual casting shall be tested where integral test pieces are called for.

11.0 MECHANICAL PROPERTIES:

The following mechanical properties shall be achieved in delivery condition of the casting.

0.2% yield strength N/mm ² (min)	Tensile strength, N/mm ²	Elongation (l=5d)% (min)	Charpy Impact strength, J (min.)
240	420-600	22	27 (Average of three specimens)

Note:

- (1) The tensile test shall be performed as per IS: 1608 or any reputed National standard.
- (2) The impact test shall be conducted on specimen of size 10mmX10mmX55mm with a 2mm ISO V-notch, as per IS: 1757 (or any other reputed National standard).
- (3) The minimum Impact value shown above is the average of three samples at the same location. Only one value can be less than the minimum average value specified above, but in no case less than 2/3rd of the same. All the three values shall be reported in the test certificate

11.1 Hardness check –

All castings (weighing less than or equal to 500 kg, for which separate keel block is casted for mechanical testing) shall be subjected to hardness check on three far off locations on the casting and also on separately casted keel block after heat treatment (in final despatch condition of the casting before carrying out mechanical testing on the keel blocks) . The hardness values thus obtained shall not vary by more than 35 BHN.

12.0 NON-DESTRUCTIVE TESTS:

The following non-destructive examinations shall be conducted in final dispatch condition of the casting:

- 12.1 Visual Examination:** The entire casting shall be visually examined for freedom from surface defects as mentioned in Cl. 8.0. Additionally, surface finish as per drawing requirements, cleaning of internal surfaces, cleaning of holes, opening, etc. shall be ensured.

HY19569	PLANT PURCHASING SPECIFICATION HYDERABAD	
Rev. No. 05		
Page 4 of 7		

12.2 Ultrasonic Examination:

Unless otherwise specified in the drawing/order, 100% volume of the castings shall be tested ultrasonically. The acceptance norm shall be severity level ‘V1’ for weld ends and ‘V2’ for all other areas, as per BHEL standard DIN: 1690 part 2.

12.3 Magnetic Particle Examination:

Unless otherwise specified in the drawing/order, 100% area of the castings shall be tested by magnetic particle examination. Acceptance norm shall be severity level ‘S1’ for weld ends and ‘S2’ for all other surfaces as per DIN: 1690 part 2.

Note: All the areas/ volumes which are not accessible for NDT as required above, casting manufacturers shall ensure that the required quality is achieved in those areas by suitable foundry processes so that the intended application of the casting is not affected.

13.0 ADDITIONAL TESTS:

13.1 Any other tests as mentioned in drawing and order

13.2 Irrespective of the drawing requirements, all bearing pedestals and bearing housing castings of steam turbines shall be subjected to ‘Kerosene leak test’ as per HY08501173.

14.0 REPAIR WELDING:

The major defects in the castings shall be reported to BHEL by sending defectogram. Any major repair by welding shall be done as per DIN EN 10213 only with the prior approval of BHEL.

15.0 QUALITY PLAN :

15.1 The supplier shall follow the quality plan Ref. BHEL/QP/HY 19569 Rev.05 as per annexure A, unless the conditions stipulated in cl. 15.2 & 15.3 are applicable.

15.2 In case customer/project related additional requirements are applicable in the enquiry/tender, vendor may be asked to submit a separate QP including such requirements.

15.3 In case of new vendors or first time supplies according to drawings mentioned in BHEL enquiry, QP shall be submitted for approval by BHEL.

16.0 INSPECTION AT SUPPLIER’S WORKS:

16.1 BHEL Inspector/BHEL authorized third party inspection agency will identify and mark the test pieces. Tests and inspection are to be conducted in presence of BHEL representative. Castings shall be dispatched only after his approval.

16.2 The BHEL Inspector/BHEL authorized third party inspection agency shall have free access at all times while the work on the contract is being performed, to all parts of the manufacturer’s works. The supplier shall offer him all reasonable facilities without charge to satisfy the latter that the material is being furnished in accordance with this specification



PLANT PURCHASING SPECIFICATION HYDERABAD

HY19569

Rev. No. 05

Page 5 of 7

17.0 TEST CERTIFICATE:

Three sets of the original test certificates (in English) shall be furnished to BHEL with the following details.

- (a) Heat no. and order no. on every page.
- (b) Material specification HY 19569 Rev.05
- (c) Heat analysis and melting method.
- (d) Heat treatment charts / cycles actually followed.
- (e) Information about the size of the separately cast sample or the attached sample.
- (f) Mechanical test results for each casting or heat treatment batch, as applicable.
- (g) Hardness test result on keel block and casting
- (h) Photos or sketches with all recordable areas prepared for welding.
- (i) Weld report with the information of PQR, the welders and the used electrodes and copy of written approval for welding by BHEL (in case of major repairs).
- (j) Confirmation of the quality ordered.
- (k) Records / Reports for NDE.
- (l) Dimensional inspection report.
- (m) Kerosene Leak test report (if applicable)

18.0 MARKING:

For castings' the pattern and heat numbers shall be used as identification markings. The pattern number may be applied by casting or with numeral punches depending on the item size. The heat number shall be applied with numeral punches.

In addition to above following information shall also be provided on the castings.

- (a) Supplier's Name
- (b) HY 19569 Rev. 05.
- (c) Melt No. /Heat treatment batch No./ Serial No. of the casting
- (d) Drawing Number and Purchase Order Number.
- (e) BHEL appointed inspectors' stamp.

19.0 PACKING, PRESERVATION AND TRANSPORTATION :

The castings shall be properly protected from damage and corrosion during transport. The entire surface of the castings shall be applied with suitable non-greasy anticorrosive coating. Painting is not permitted on any surface.

20.0 REJECTION AND REPLACEMENT :

The final decision regarding acceptance or rejection rests with BHEL, if the casting is not found as per this specification at any time during further operation on the casting.

The supplier shall replace the rejected casting at this own cost and the rejected castings shall be returned after all commercial terms and conditions are satisfied.

Vendor's Name & Address		QUALITY PLAN				BHEL Spec. HY19569REV.05				Page: 6 of 7	
		Customer:				QP No. BHEL/ HY19569/QAP Rev.00 Page: 1 of 2					
		Project:				BHEL ENQ. NO.					
		Product:									
Sl. No.	Inspection Stage	Type of Check	Quantum	Reference Document	Acceptance Norms	Format of records	D	AGENCY			Remarks
								P	W	V	
1.	Pattern inspection	Visual and Dimensions	Each pattern	BHEL Drg.	BHEL Drg.	Internal records		2	-	1	
2.	Melting & Pouring	Chemical composition	Every Melt	HY19569 Rev.05	HY19569 Rev.05	TC, log sheets	√	2	-	1	
3.	Heat treatment	HT cycles review	Each Cycle	HY19569 Rev.05	HY19569 Rev.05	H.T Records HT Charts, TC	√	2	-	1	TPIA shall verify HT charts, furnace temperature uniformity survey records & calibration of measuring instruments used
4.	Keel block identification	Physical	Each casting	Each casting	HY19569 Rev.05 & drg.	Identification report	√	2	1	-	Refer Cl.10.1
5.	Repair welding, if any (Based on internal NDT)	Record review	Each casting	Each casting	HY19569 Rev.05	Defectogram, Inspection Report, Welder qualification Records	√	2	-	1	Defectogram (along with WPS/PQR) shall be submitted for written permission to BHEL before any major weld repair.
6.	Welder qualification	Record view	Each welder	--	HY19569 Rev.05	Welding records		2	-	1	Review of welder qualification records
7.	Stress relieving followed by shot blasting (after rough machining)	Record view	Each casting	HY19569 Rev.05 & Drg	HY19569 Rev.05 & Drg.	HT Charts, TC	√	2	-	1	
8.	Mech. Properties (In final dispatch condition of the casting)	Mechanical tests & hardness	Each casting	Spec. & Drg.	Spec. & Drg.	TC	√	2	1	-	

Legend:

- P Perform; W Witness; V Verification;
- Indicate 1 for BHEL or BHEL nominated Inspection agency & 2 for vendor/sub vendor as appropriate against each component /characteristic under P, W & V columns.
- * For items marked √ (tick) in column D, test certificates shall be submitted to BHEL for records.

Prepared by

Manoj Kumar

Signature and Stamp

MANOJ KUMAR

अभियंता / समग्र अभियांत्रिकी एवं लेब्स
Engineer / ME & Labs
बीएचईएल, हैद / BHEL, Hyd - 502 032

Approved by

Sirisha

Signature and Stamp

V. SIRISHA

सी.ई.बी. बी. श्रीरिषा
BHEL-QA Signature Assurance
अभियंता / Quality Assurance
Engineer / Quality Assurance
बीएचईएल, हैद / BHEL, Hyd - 502 032

Vendor's confirmation

Signature and Stamp

Vendor's Name & Address		QUALITY PLAN				BHEL Spec. HY19569REV.05				Page 7 of 7	
		Customer:				QP No. BHEL/QAP/HY19569/Rev.00 Page 2 of 2					
		Project:				BHEL ENQ. NO.					
		Product:									
Sl. No.	Characteristics	Type of Check	Quantum	Reference Document	Acceptance Norms	Format of records	D	AGENCY			Remarks
								P	W	V	
9.	Dimensional Inspection	Visual	Each Casting	Spec. & Drg.	Spec. & Drg.	TC	√	2	1	-	
10.a	Non Destructive Examination	Visual examination	Each Casting	Spec. & Drg.	Spec. & Drg.	TC	√	2	1	-	Surface finish, Cleaning of internal surfaces, Cleaning of holes, opening, etc.
10.b		MPI	100% area of the casting	Spec. & Drg.	Spec. & Drg.	TC	√	2	1	-	
10.c		UT	100% volume of the casting	Spec. & Drg.	Spec. & Drg.	TC	√	2	1	-	
11.	Additional Tests (If specified in Drawing / order)	--	Each casting	Spec & Drg	Spec. & Drg.	TC	√	2	1	-	
12.	Kerosene Leak Test	Visual check	Each Casting	Spec.	Spec.	TC	√	2	1	-	1. All bearing pedestal and bearing housing castings of steam turbines 2. Any other, if applicable
13.	Marking and punching	Markings	Each casting	Spec. & Drg.	Spec. & Drg.			2	1	-	
14.	Preservation & Dispatch	Visual	Each casting	Spec. & Drg.	Spec. & Drg.	Records	√	2	-	1	
15.	Documentation & certification	Verification	Each casting	Spec. & Drg.	Spec. & Drg.	TC	√	2	-	1	TPIA shall certify all documents required as per specification & drawing.

Note: 1. This QAP is not applicable for 1st time supplies.

2. Any other additional requirement related to the drawing, BHEL customer or purchase order will also be applicable.

3. Vendor shall submit signed and stamped copy of this QAP along with their technical offer

Legend:	Prepared by	Approved by	Vendor's confirmation
• P Perform; W Witness; V Verification; • Indicate 1 for BHEL or BHEL nominated Inspection agency & 2 for vendor/sub vendor as appropriate against each component /characteristic under P, W & V columns. • * For items marked V (tick) in column D, test certificates shall be submitted to BHEL for records.	MANOJ KUMAR अभियंता / समायोक्त अभियंता की एवं लेब्स Engineer / ME & Labs हीराचरमन, हैद / BHEL, Hyd - 502 032	CH.B.V. SIRISHA अभियंता / समायोक्त अभियंता की एवं लेब्स Engineer / ME & Labs हीराचरमन, हैद / BHEL, Hyd - 502 032	Signature and Stamp

	PLANT PURCHASING SPECIFICATION HYDERABAD	HY19570 Rev. No. 08 Page 1 of 8			
CARBON STEEL CASTINGS FOR STEAM TURBINES GRADE: GP 240 GH					
1.0 GENARAL : This specification governs the quality requirements of carbon steel castings of material grade GP240 GH. 2.0 APPLICATION : These castings are required for steam turbine casings, valve bodies, guide blade carriers, inserts etc. 3.0 CONDITION OF DELIVERY : The castings shall be supplied in normalized or normalized & tempered, rough machined; stress relieved and shot blasted condition. Cleaning of internal surface shall be ensured. The surface condition of the casting shall be suitable for the applicable NDT. The castings shall not be painted. 4.0 COMPLIANCE WITH NATIONAL STANDARDS : This specification complies, in general, with EN 10213, Gr.GP 240 GH. 5.0 DIMENSIONS AND TOLERANCES : 5.1 Dimensions: The enclosed drawings are finish machined ones (unless otherwise specified). The castings shall be supplied in rough machined condition with an allowance of 4 to 6mm on the surfaces where machining symbols have been shown on the drawing. Small grooves, steps etc., up to 50 mm (width or size), need not be rough machined. 5.2 Tolerances: If not specified in the purchasing documents, the general tolerances according to DIN 1683-1, Grade GTB 18 are applicable.					
Revisions: Modified quality plan (Annexure A)		Issued : STANDARDS ENGINEERING & IPR COORDINATION DEPARTMENT			
Rev. No. 08	Amd. No.	Reaffirmed:	Prepared:	Approved:	Date of 1 st issue:
Dt.DEC. 2013	Dt.	Year:	Matls. Engg.	GM (Engg.)	AUG. 1983

HY19570	PLANT PURCHASING SPECIFICATION HYDERABAD	
Rev. No. 08		
Page 2 of 8		

6.0 MANUFACTURE:

6.1 General requirements :

The steel shall be manufactured by an electric melting process or by any other process involving secondary refining. Surface finish of the machined surface shall be as per ordering drawing.

- 6.2 Welding:** Welding shall be performed on heat treated castings only according to the successful welding procedure approval record (WPAR). Area to be welded shall be ground down to the flawless base metal & design welds shall be prepared accordingly. This shall be checked by surface crack inspection. In this case quality level S1 according to AA0850108 shall be achieved. In case of design welding, the weld ends have to fulfill severity level 1 as per AA0850107 over a length of 50 mm.

Before welding of all major defects, the supplier shall hand over to BHEL a documentation of the areas to be prepared for welding & the welding procedure specification (WPS).

Major defects are classified as:-

1. Excavations ready for welding with a length ≥ 150 mm.
2. Excavations with a depth $\geq 40\%$ of the wall thickness or ≥ 25 mm.
3. Any build-up welding greater than 100 cm^2 .
4. Unusual large production welding (e.g. weight of filler metal $\geq 3\%$ of the total casting weight) and/or welding situated in high stress of the casting.

These shall be documented by a sketch or photograph noting the appropriate positions and dimensions so that their traceability is assured.

Note: 1. A written permission from BHEL shall be obtained before starting weld repair of any defects.

2. Production welds without post weld heat treatment are not acceptable.

- 6.3** Weld hardness shall be checked random wise and documented accordingly. The values of 320 HV maximum are allowed.
- 6.4** Welding filler material shall be covered electrodes E 425B42H5 according to EN 499 or E 7018-1 H4R according to AWS A 5.1-91. The use of other welding filler material is allowed only after written permission from BHEL.

7.0 HEAT TREATMENT :

According to EN 10213.

Normalizing: Heating in the range of 900-980°C, holding time corresponding to wall thickness. If required, tempering in the range of 600 - 700°C, followed by air cooling can be done, to achieve the desired properties.



**PLANT PURCHASING
SPECIFICATION
HYDERABAD**

HY19570

Rev. No. 08

Page 3 of 8

Stress relieving: The casting shall be stress relieved after rough machining at supplier works. The stress relieving shall be carried out in the range of 600-650°C. However, the actual stress relieving temperature shall be 30 °C below the tempering temperature (incase tempering process is followed). The stress relieving after rough machining can be dropped, if production welding followed by stress relieving is carried out after rough machining of the casting.

The actual heat treatment cycles followed shall be reported in the test certificate.

8.0 FREEDOM FROM DEFECTS:

- 8.1** Supplier shall ensure that the casting is free of defects like porosity, shrinkage, cracks etc., in the areas which will be subsequently machined at BHEL.
- 8.2** In case where pressure tightness is called for (though the test may be conducted at BHEL) the required quality shall be ensured to guarantee the same.
- 8.3** As cast surfaces shall be free from harmful foundry defects like slag inclusions, sand spots, cold shuts, shrinkage, scabs etc.
- 8.4** Cracks are not permitted on any surface of the castings.

9.0 CHEMICAL COMPOSITION :

The heat analysis of steel shall conform to the following according to EN 10213 in weight %.

Element	Melt analysis	
	Minimum	Maximum
C	0.18	0.23
Si	-	0.60
Mn	0.50	1.20
S	-	0.020
P	-	0.030

The contents of tramp elements shall be as follows:

Element	Minimum	Maximum
Cr	-	0.30
Mo	-	0.12
Ni	-	0.40
V	-	0.03
Cu	-	0.30
Al	-	0.025
As	-	0.020
Sb	-	0.010
Sn	-	0.025

Note: 1) Cr+Mo+Ni+V+Cu ≤1.00%

PLANT PURCHASING SPECIFICATION HYDERABAD



10.0 MECHANICAL PROPERTIES :

10.1 Test samples – The mechanical properties shall be determined on one separately cast test coupon for each heat and heat treatment batch (if the casting weight is less than or equal to 500 kg) or on one integral test coupon (castings having weight more than 500 kg) for each casting. The size of the test coupon shall be selected as appropriate to the thickness of the actual castings and the extent of testing. After casting, the test coupons shall receive a stamp indicating the heat number. It is mandatory to keep the test coupon along with the castings from same heat during each subsequent heat treatment.

10.2 Supply of keel blocks to BHEL (only applicable for Outer casing, Inner casing and Steam chambers) – Another integral keel block similar to the size of the keel block already used for testing at suppliers works shall also be casted along with the casting. It shall be stamped with Heat No./P.O. No./HY19570 and also third party stamp and supplied to BHEL after detaching from the casting but tack welded at a suitable location where its removal is easy at BHEL. This test block will be utilized for any retests required at BHEL.

10.3 Mechanical properties – the following mechanical properties shall be achieved at room temperature in the delivery condition of the casting.

0.2% yield strength N/mm ² . (min)	Tensile strength, N/mm ² (min)	Elongation(1 =5d)% (min)	Reduction in area %, (min)	Impact energy, J (See Note (1)) (min.)
240	420-600	22	40	27

Note (1) Average of 3 charpy (2mm V-notch) specimens, where the smallest value shall be at least 21 J.

10.4 Hardness check –

1. All welded zones shall be checked for hardness at random and the hardness shall be 320 HV maximum.
2. All castings (weighing less than or equal to 500 kg, for which separate keel block is casted for mechanical testing) shall be subjected to hardness check on three far off locations on the casting. The hardness values of the casting shall be within ± 20 BHN of the average of three hardness values tested on the keel block after final heat treatment.

11.0 OUTER AND INNER QUALITY / NDE :

The following non-destructive examinations shall be conducted:



**PLANT PURCHASING
SPECIFICATION
HYDERABAD**

HY19570

Rev. No. 08

Page 5 of 8

11.1 Ultrasonic Examination:- Unless otherwise specified in the drawing/order, 100% area of the casting shall be tested by ultrasonic examination . Acceptance norms shall be severity level 1 for weld ends and 2 for all other areas, as per AA0850107. Wherever ultrasonic examination is not technically feasible, radiography examination shall be made. In case both are not possible, the same shall be referred to BHEL for clarification and approval.

11.2 Magnetic Particle Examination:- Unless otherwise specified in the drawing/order, 100% area of the castings (technically feasible) shall be tested by magnetic particle examination. Acceptance norms shall be severity level 1 for weld ends and 2 for all other surfaces as per AA0850108.

11.3 Radiographic examination: Unless otherwise specified in the order, all areas marked on the drawings, high defect level areas as indicated in ultrasonic examination and also the areas which are not feasible to be examined by UT shall be examined by radiographic examination. Acceptance norms shall be severity level 1 for weld ends and 2 for all other areas, as per EN 12681.

12.0 QUALITY PLAN :

12.1 The supplier shall follow the quality plan Ref. BHEL/QP/HY 19570 Rev.08 as per annexure A, unless the conditions stipulated in cl. 12.2 & 12.3 are applicable.

12.2 In case customer/project related additional requirements are applicable in the enquiry/tender, vendor may be asked to submit a separate QP including such requirements.

12.3 In case of new vendors or first time supplies according to drawings mentioned in BHEL enquiry, QP shall be submitted for approval by BHEL.

13.0 TEST CERTIFICATE:

Three sets of the original test certificates (in English) shall be furnished to BHEL with the following details.

- (a) Heat no. and order no. on every page.
- (b) Material specification HY 19570 Rev.08 and material grade GP 240 GH.
- (c) Heat analysis and melting method.
- (d) Information about the size of the separately cast sample or the attached sample.
- (e) Mechanical test results for each casting or heat treatment load, as applicable.
- (f) Hardness test results

PLANT PURCHASING SPECIFICATION HYDERABAD



- (g) Heat treatment charts / cycles actually followed.
- (h) Photos or sketches with all recordable areas prepared for welding.
- (i) Weld report with the information of PQR, the welders and the used electrodes and copy of written approval for welding by BHEL
- (j) Confirmation of the quality ordered.
- (k) Records / Reports for NDE.
- (l) Dimensional inspection report.

Deviation: Any deviation from this delivery specification has to be reported to BHEL immediately. Any deviation is generally accepted only if this has been approved by BHEL in a written form.

14.0 MARKING:

For castings' the pattern and heat numbers shall be used as identification markings. The pattern number may be applied by casting or with numeral punches depending on the item size. The heat number shall be applied with numeral punches.

In addition to above following information shall also be provided on the castings.

- (a) HY 19570 Rev. 08.
- (b) Drawing Number and Purchase Order Number.
- (c) BHEL appointed inspectors' stamp.

15.0 PACKING, PRESERVATION AND TRANSPORTATION :

The casting shall be suitably packed in a condition to withstand for indefinite time exposure to all climatic conditions without developing any external and internal defects.

The castings shall be properly protected from damage and corrosion during transport. The entire surface of the castings shall be applied with suitable non-greasy anticorrosive coating. Painting is not permitted on any surface. Supplier may use anticorrosive paint HE 1707 (produced by central insulation technology, BHEL, Bhopal) or petrolatum (produced by Bharat petroleum). The overseas supplier may use Tectyle 506 produced by Volvoline, Germany.

16.0 REJECTION AND REPLACEMENT :

The final decision regarding acceptance or rejection rests with BHEL, if the casting is not found as per this specification at any time during further operation on the casting. The supplier shall replace the rejected casting at this own cost and the rejected castings shall be returned after all commercial terms and conditions are satisfied.

ANNEXURE A (as per clause 12.0)								HY19570REV.08 PAGE 7 OF 8			
Vendor's Name & Address		Customer:			BHEL ENQ. NO.			QP No. BHEL/HY19570REV.08			
		Project:			Date:			Page: 1 of 2			
		Product:			BHEL Spec. HY19570REV.08						
Sl. No.	Characteristics	Type of Check	Quantum	Reference Document	Acceptance Norms	Format of records	Documents to be submitted to BHEL	AGENCY			Remarks
								M	C	I	
1.	Pattern	Dimensions	Each pattern	Internal	BHEL Drg.	Internal records	-	P		V	
2.	Chemical composition	Chemical	Every Melt	HY19570 Rev.08	HY19570 Rev.08	TC	TC	P		V	
3.	Heat treatment	HT cycles review	100%	-do-	-do-	H.T Records	HT Charts, TC	P		V	Final verification of documents.
4.	Keel block identification	Physical	Each casting	Each casting	HY19570 Rev.08	HY19570 Rev.08	Identification report	P		W	If casting weight is more than 500 kg. Refer Cl.10.1
5.	Mech. properties (In final dispatch condition of the casting)	Mechanical tests	-do-	-do-	-do-	-do-	TC	P		W	Tests shall be conducted on samples selected / identified by BHEL nominated inspection agency.
		Hardness	Weld repaired areas & casting/test coupon	HY19570 Rev.08	HY19570 Rev.08	TC	TC	P		W	Refer clause 10.4
6.(a)	WPS/PQR for repair welding, if any (Based on internal NDT)	Record review	100%	-do- Cl. 6.2	-do-	Welding records, Defectogram	Inspection Report, Welder qualification Re-cords	P		V	Defectogram shall be submitted to BHEL for written permission for weld repair.
6.(b)	Welder qualification	Record view	100%	100%	HY19570 Rev.08	HY19570 Rev.08	Welding records	P		V	Review of welder qualification
7.	Stress relieving followed by shot blasting	Record view	100%	HY19570 Rev.08	HY19570 Rev.08	H.T Records	HT Charts, TC	P		V	Refer clause 7.0
8.	Dimensional Inspection (after rough machining)	Visual	Each Casting	Spec. & Drg.	Spec. & Drg.		TC	P		W	See Note 1 (applicable only to Outer casing, Inner casing and steam chamber)
9.	Surface quality	MPI	100% technically feasible areas	-do-	-do-	-do-	TC	P		W	

Signature of the Manufacturer with Company Stamp
(To be submitted along with the technical offer)

ANNEXURE A (as per clause 12.0)								HY19570REV.08PAGE 8 OF 8			
Vendor's Name & Address		Customer:			BHEL ENQ. NO.			QP No. BHEL/HY19570REV.08			
		Project:			Date:			Page: 2 of 2			
		Product:			BHEL Spec. HY19570REV.08						
Sl. No.	Characteristics	Type of Check	Quantum	Reference Document	Acceptance Norms	Format of records	Documents to be submitted to BHEL	AGENCY			Remarks
								M	C	I	
10.	Soundness of material	UT	-do-	-do-	-do-	-do-	TC	P		W	RT films to be reviewed.
		RT	At areas marked in Drg and any other area where UT & MPI are not possible	-do-	-do-	-do-	TC	P		V	
11.	Matching of upper & lower half of casting	Visual	100%	Drg	Drg	TC	Dimensional Inspection Report, TC	P		W	Casting shall be allowed to dispatch as a set only (if ordered as a set).
12.	Marking and punching	Markings	Each casting	Spec. & Drg.	Spec. & Drg.			P		W	
13.	Visual Inspection	Visual check 1) surface finish 2)cleaning of internal surfaces 3)Cleaning of holes, opening etc	Each Casting	Spec. & Drg.	Spec. & Drg.		TC	P		W	
14.	Preservation & Dispatch	Visual	Each casting	Spec. & Drg.	Spec. & Drg.	Records	Records	P		V	Both U/P & L/P castings shall be dispatched as a set only after machining (if ordered as a set).
15.	Documentation & certification		Each casting	Spec. & Drg.	Spec. & Drg.	TC	TC	P		V	TPIA shall certify all documents required as per specification & drawing.

LEGENDS: P PERFORM ;W WITNESS ;V VERIFICATION ; M:MANUFACTURE/SUB-SUPPLIER; C: CUSTOMER (BHEL); I: NOMINATED INSPECTION AGENCY

Note 1: All the reference planes, axes and dimensions of major features (like length, diameters, groves, steps etc.) shall be hard punched on the casting itself. Same shall be highlighted by painting two parallel lines on either side of the punches.

Signature of the Manufacturer with Company Stamp
(To be submitted along with the technical offer)



**PLANT PURCHASING
SPECIFICATION
HYDERABAD**

HY19573

Rev. No. 08

Page 1 of 8

**ALLOY STEEL CASTINGS FOR STEAM TURBINES
FOR HIGH TEMPERATURE SERVICE**

GRADE: G 17 Cr Mo V 510

1.0 GENERAL :

This specification governs the quality requirements of carbon steel castings of material grade G 17 Cr Mo V 510.

2.0 APPLICATION :

These castings are required for steam turbine casings, valve bodies, guide blade carriers, inserts etc.

3.0 CONDITION OF DELIVERY :

The castings shall be supplied in hardened & tempered, rough machined; stress relieved and shot blasted condition. Cleaning of internal surface shall be ensured. The surface condition of the casting shall be suitable for the applicable NDT. The castings shall not be painted.

4.0 COMPLIANCE WITH NATIONAL STANDARDS :

This specification complies, in general, with EN 10213, Gr. G 17 Cr Mo V 510.

5.0 DIMENSIONS AND TOLERANCES :

5.1 Dimensions:

The enclosed drawings are finish machined ones (unless otherwise specified). The castings shall be supplied in rough machined condition with an allowance of 4 to 6mm on the surfaces where machining symbols have been shown on the drawing. Small grooves, steps etc., up to 50 mm (width or size), need not be rough machined.

5.2 Tolerances:

If not specified in the purchasing documents, the general tolerances according to DIN 1683-1, Grade GTB 18 are applicable.

Revisions:

Modified Annexure A (QAP).

Issued :

**STANDARDS ENGINEERING & IPR
COORDINATION DEPARTMENT**

Rev. No. 08	Amd. No.	Reaffirmed:	Prepared:	Approved:	Date of 1st issue:
Dt. DEC. 2013	Dt.	Year:	Mtls. Engg.	GM (Engg.)	AUG. 1983

PLANT PURCHASING SPECIFICATION HYDERABAD



6.0 MANUFACTURE:

6.1 General requirements :

The steel shall be manufactured by an electric melting process or by any other process involving secondary refining. Surface finish of the machined surface shall be as per ordering drawing.

- 6.2 Welding:** Welding shall be performed on heat treated castings only according to the successful welding procedure approval record (WPAR). Area to be welded shall be ground down to the flawless base metal & design welds shall be prepared accordingly. This shall be checked by surface crack inspection. In this case quality level S1 according to AA0850108 shall be achieved. In case of design welding, the weld ends have to fulfill severity level 1 as per AA0850107 over a length of 50 mm.

Before welding of all major defects, the supplier shall hand over to BHEL a documentation of the areas to be prepared for welding & the welding procedure specification (WPS).

Major defects are classified as:-

1. Excavations ready for welding with a length ≥ 150 mm.
2. Excavations with a depth $\geq 40\%$ of the wall thickness or ≥ 25 mm.
3. Any build-up welding greater than 100 cm^2 .
4. Unusual large production welding (e.g. weight of filler metal $\geq 3\%$ of the total casting weight) and/or welding situated in high stress of the casting.

These shall be documented by a sketch or photograph noting the appropriate positions and dimensions so that their traceability is assured.

- Note:** 1. A written permission from BHEL shall be obtained before starting weld repair of any defects
2. Production welds without post weld heat treatment are not acceptable.

- 6.3** Weld hardness shall be checked random wise and documented accordingly. The values of 320 HV or 304 BHN maximum are allowed.

- 6.4** The welding filler material shall be in according to the WPR and with following analysis (%).

C	Si	Mn	Cr	Mo	V	Ni
0.10 - 0.15	0.50 max	1.0 max	1.00 - 1.50	0.90 - 1.30	0.20 - 0.30	0.40 max

The use of any other welding filler material is allowed only after written permission from BHEL, Hyderabad.

7.0 HEAT TREATMENT :

According to EN 10213.

Hardening: At temperature $920 - 960^\circ\text{C}$, holding time corresponding to the wall thickness. Depending on the wall thickness, cooling to be done in oil or an adequate liquid or circulated air.



**PLANT PURCHASING
SPECIFICATION
HYDERABAD**

HY19573

Rev. No. 08

Page 3 of 8

Tempering: At temperature 680 - 740°C, holding time corresponding to the wall thickness. Cooling at calm air or cooling in furnace down to 300°C, then calm air. With respect to optimum long - term properties a microstructure transformation in the upper bainite range is to be achieved.

Stress relieving: After rough machining in the foundry, stress relieving treatment is necessary before delivery of the casting. The stress relieving temperature should not be more than the actually applied tempering temperature. The cooling rate for the stress relieving should be $\leq 30^\circ\text{C/hr}$ down to $\leq 300^\circ\text{C}$. The stress relieving after rough machining can be dropped, if production welding followed by stress relieving is carried out after rough machining of the casting.

The actual heat treatment cycles followed shall be reported in the test certificate.

8.0 FREEDOM FROM DEFECTS:

8.1 Supplier shall ensure that the casting is free of defects like porosity, shrinkage, cracks etc., in the areas which will be subsequently machined at BHEL.

8.2 In case where pressure tightness is called for (though the test may be conducted at BHEL) the required quality shall be ensured to guarantee the same.

8.3 As cast surfaces shall be free from harmful foundry defects like slag inclusions, sand spots, cold shuts, shrinkage, scabs etc.

8.4 Cracks are not permitted on any surface of the castings.

9.0 CHEMICAL COMPOSITION :

The heat analysis of steel shall conform to the following according to EN 10213 in weight %.

Element	Melt analysis	
	Minimum	Maximum
C	0.15	0.20
Si	-	0.60
Mn	0.50	0.90
S	-	0.015
P	-	0.020
Mo	0.90	1.10
Cr	1.20	1.50
Ni	-	0.70
V	0.20	0.30
Cu	-	0.30
Al	-	0.040
Ti	-	0.025
Sb	-	0.010
Sn	-	0.025

PLANT PURCHASING SPECIFICATION HYDERABAD



10.0 MECHANICAL PROPERTIES :

10.1 Test samples – The mechanical properties shall be determined on one separately cast test coupon for each heat and heat treatment batch (if the casting weight is less than or equal to 500 kg) or on one integral test coupon (castings having weight more than 500 kg) for each casting. The size of the test coupon shall be selected as appropriate to the thickness of the actual castings and the extent of testing. After casting, the test coupons shall receive a stamp indicating the heat number. It is mandatory to keep the test coupon along with the castings from same heat during each subsequent heat treatment.

10.2 Supply of keel blocks to BHEL (only applicable for Outer casing, Inner casing and Steam chambers) – Another integral keel block similar to the size of the keel block already used for testing at suppliers works shall also be casted along with the casting. It shall be stamped with Heat No./P.O. No./HY19573 and also third party stamp and supplied to BHEL after detaching from the casting but tack welded at a suitable location where its removal is easy at BHEL. This test block will be utilized for any retests required at BHEL.

10.3 Mechanical properties – the following mechanical properties shall be achieved at room temperature in the delivery condition of the casting.

0.2% yield strength N/mm ² . (min)	Tensile strength, N/mm ² (min)	Elongation(l =5d)% (min)	Reduction in area %, (min)	Impact energy, J (See Note (1)) (min.)
440	590-780	15	40	27

Note (1) Average of 3 charpy (2mm V-notch) specimens, where the smallest value shall be at least 21 J.

10.4 Hardness check –

1. All welded zones shall be checked for hardness at random and the hardness shall be 320 HV or 304 BHN maximum.
2. All castings (weighing less than or equal to 500 kg, for which separate keel block is casted for mechanical testing) shall be subjected to hardness check on three far off locations on the casting. The hardness values of the castings shall be within ± 20 BHN of the average of three hardness values tested on the keel block after heat treatment.

11.0 OUTER AND INNER QUALITY / NDE :

The following non-destructive examinations shall be conducted:



**PLANT PURCHASING
SPECIFICATION
HYDERABAD**

HY19573

Rev. No. 08

Page 5 of 8

Copyright and Confidential
The information on this document is the property of BHARATI HEAVY ELECTRICALS LIMITED
It must not be used directly or indirectly in any way detrimental to the interest of the company.

11.1 Ultrasonic Examination:- Unless otherwise specified in the drawing/order, 100% area of the casting shall be tested by ultrasonic examination. Acceptance norms shall be severity level 1 weld ends and 2 for all other areas, as per AA0850107. Wherever ultrasonic examination is not technically feasible, radiography examination shall be made. In case both are not possible, the same shall be referred to BHEL for clarification and approval.

11.2 Magnetic Particle Examination:- Unless otherwise specified in the drawing/order, 100% area of the castings (technically feasible) shall be tested by magnetic particle examination. Acceptance norms shall be severity level 1 for weld ends and 2 for all other surfaces as per AA0850108.

11.3 Radiographic examination: Unless otherwise specified in the order, all areas marked on the drawings, high defect level areas as indicated in ultrasonic examination and also the areas which are not feasible to be examined by UT shall be examined by radiographic examination. Acceptance norms shall be severity level 1 for weld ends and 2 for all other areas, as per EN 12681.

12.0 QUALITY PLAN :

12.1 The supplier shall follow the quality plan Ref. BHEL/QP/HY 19573 Rev.08 as per annexure A, unless the conditions stipulated in cl. 12.2 & 12.3 are applicable.

12.2 In case customer/project related additional requirements are applicable in the enquiry/tender, vendor may be asked to submit a separate QP including such requirements.

12.3 In case of new vendors or first time supplies according to drawings mentioned in BHEL enquiry, QP shall be submitted for approval by BHEL.

13.0 TEST CERTIFICATE:

Three sets of the original test certificates (in English) shall be furnished to BHEL with the following details.

- (a) Heat no. and order no. on every page.
- (b) Material specification HY 19573 Rev.08 and material grade G 17 Cr Mo V 510.
- (c) Heat analysis and melting method.
- (d) Information about the size of the separately cast sample or the attached sample.
- (e) Mechanical test results for each casting or heat treatment load, as applicable.
- (f) Hardness test results

**PLANT PURCHASING
SPECIFICATION
HYDERABAD**



- (g) Heat treatment charts / cycles actually followed.
- (h) Photos or sketches with all recordable areas prepared for welding.
- (i) Weld report with the information of PQR, the welders and the used electrodes and copy of written approval for welding by BHEL
- (j) Confirmation of the quality ordered.
- (k) Records / Reports for NDE.
- (l) Dimensional inspection report.

Deviation: Any deviation from this delivery specification has to be reported to BHEL immediately. Any deviation is generally accepted only if this has been approved by BHEL in a written form.

14.0 MARKING:

For castings' the pattern and heat numbers shall be used as identification markings. The pattern number may be applied by casting or with numeral punches depending on the item size. The heat number shall be applied with numeral punches.

In addition to above following information shall also be provided on the castings.

- (a) HY 19573 Rev. 08.
- (b) Drawing Number and Purchase Order Number.
- (c) BHEL appointed inspectors' stamp.

15.0 PACKING, PRESERVATION AND TRANSPORTATION :

The casting shall be suitably packed in a condition to withstand for indefinite time exposure to all climatic conditions without developing any external and internal defects.

The castings shall be properly protected from damage and corrosion during transport. The entire surface of the castings shall be applied with suitable non-greasy anticorrosive coating. Painting is not permitted on any surface. Supplier may use anticorrosive paint HE 1707 (produced by central insulation technology, BHEL, Bhopal) or petrolatum (produced by Bharat petroleum). The overseas supplier may use Tectyle 506 produced by Volvoline, Germany.

16.0 REJECTION AND REPLACEMENT :

The final decision regarding acceptance or rejection rests with BHEL, if the casting is not found as per this specification at any time during further operation on the casting. The supplier shall replace the rejected casting at this own cost and the rejected castings shall be returned after all commercial terms and conditions are satisfied.

ANNEXURE A (as per clause 12.0)											
Vendor's Name & Address		Customer:		BHEL ENQ. NO.		HY19573REV.08 PAGE 7 OF 8					
		Project:		Date:		QP No. BHEL/HY19573REV.08					
		Product:		BHEL Spec. HY19573REV.08		Page: 1 of 2					
Sl. No.	Characteristics	Type of Check	Quantum	Reference Document	Acceptance Norms	Format of records	Documents to be submitted to BHEL	AGENCY		Remarks	
								M	C	I	
1.	Pattern	Dimensions	Each pattern	Internal	BHEL Drg.	Internal records	-	P		V	
2.	Chemical composition	Chemical	Every Melt	HY19573 Rev.08	HY19573 Rev.08	TC	TC	P		V	
3.	Heat treatment	HT cycles review	100%	-do-	-do-	H.T Records	HT Charts, TC	P		V	Final verification of documents.
4.	Keel block identification	Physical	Each casting	Each casting	HY19573 Rev.08	HY19573 Rev.08	Identification report	P		W	If casting weight is more than 500 kg. Refer Cl.10.1
5.	Mech. properties (in final delivery condition)	Mechanical tests	-do-	-do-	-do-	-do-	TC	P		W	Tests shall be conducted on samples selected / identified by BHEL nominated inspection agency.
6.(a)	WPS/PQR for repair welding, if any (Based on internal NDT)	Hardness	Weld repaired areas & casting/test coupon	HY19573 Rev.08	HY19573 Rev.08	TC	TC	P		W	Refer clause 10.4
		Record review	100%	-do- Cl. 6.2	-do-	Welding records, Defectogram	Inspection Report, Welder qualification Records	P		V	Defectogram shall be submitted to BHEL for written permission for weld repair.
6.(b)	Welder qualification	Record view	100%	100%	HY19573 Rev.08	HY19573 Rev.08	Welding records	P		V	Review of welder qualification
7.	Stress relieving followed by shot blasting	Record view	100%	HY19573 Rev.08	HY19573 Rev.08	H.T Records	HT Charts, TC	P		V	Refer clause 7.0
8.	Dimensional Inspection (after rough machining)	Visual	Each Casting	Spec. & Drg.	Spec. & Drg.						See Note 1 (applicable only to Outer casing, Inner casing and steam chamber)
9.	Surface quality	MPI	100% technically feasible areas	-do-	-do-	-do-	TC	P		W	

ANNEXURE A (as per clause 12.0)												
Vendor's Name & Address			Customer:		BHEL ENQ. NO.		HY19573REV.08PAGE 8 OF 8					
			Project:		Date:		QP No. BHEL/HY19573REV.08					
			Product:		BHEL Spec. HY19573REV.08		Page: 2 of 2					
Sl. No.	Characteristics	Type of Check	Quantum	Reference Document	Acceptance Norms	Format of records	Documents to be submitted to BHEL	AGENCY			Remarks	
								M	C	I		
10.	Soundness of material	UT	-do-	-do-	-do-	-do-	TC	P			W	RT films to be reviewed.
		RT	At areas marked in Drg and any other area where UT & MPI are not possible	-do-	-do-	-do-	TC	P			V	
11.	Matching of upper & lower half of casting	Visual	100%	Drg	Drg	TC	Dimensional Inspection Report, TC	P			W	Casting shall be allowed to dispatch as a set only (if ordered as a set).
12.	Marking and punching	Markings	Each casting	Spec. & Drg.	Spec. & Drg.			P			W	
13.	Visual Inspection	Visual check 1) surface finish 2)cleaning of internal surfaces 3)Cleaning of holes, opening etc	Each Casting	Spec. & Drg.	Spec. & Drg.		TC	P			W	
14.	Preservation & Dispatch	Visual	Each casting	Spec. & Drg.	Spec. & Drg.	Records	Records	P			V	Both U/P & L/P castings shall be dispatched as a set only after machining (if ordered as a set).
15.	Documentation & certification		Each casting	Spec. & Drg.	Spec. & Drg.	TC	TC	P			V	TPIA shall certify all documents required as per specification & drawing.

LEGENDS: P PERFORM ; W WITNESS ; V VERIFICATION ; M MANUFACTURE / SUB-SUPPLIER ; C CUSTOMER (BHEL) ; I: NOMINATED INSPECTION AGENCY

Note 1: All the reference planes, axes and dimensions of major features (like length, diameters, groves, steps etc.) shall be hard punched on the casting itself. Same shall be highlighted by painting two parallel lines on either side of the punches.

Signature of the Manufacturer with Company Stamp
(To be submitted along with the technical offer)