



भारत हेवी इलेक्ट्रिकल्स लिमिटेड

(भारत सरकार का उपक्रम)

BHARAT HEAVY ELECTRICALS LIMITED

(A Govt. of India Undertaking)

Ref: PSER:SCT:NKP-C1999:7686

Date: 06-12-2019

NOTICE INVITING TENDER

NOTE: INTENDING BIDDER TO PARTICIPATE MAY DOWNLOAD FROM WEB SITES

Sealed offers in two part bid system are invited from reputed & experienced bidders meeting **PRE QUALIFICATION CRITERIA** as mentioned in Annexure-1 **through E-Procurement Portal <https://bhel.abcprocure.com> only**, for the subject job by the undersigned on the behalf of BHARAT HEAVY ELECTRICALS LIMITED as per the tender document. Issue/ forwarding intimation regarding tender to any bidder shall not construe that the bidder is considered to be qualified. Consideration of their offer is subject to compliance of loading criteria as per clause no. 8.0 of NIT etc. specified below. Following points relevant to the tender may please be noted and complied with.

1.0 Salient Features of NIT

SL NO	ISSUE	DESCRIPTION
i	TENDER NUMBER	PSER:SCT:NKP-C1999:19
ii	Broad Scope of job	Balance Civil and Architectural works etc. of BTG area for Unit # 1 & 3 of 3x660 MW North Karanpura STPP, Jharkhand.
iii	DETAILS OF TENDER DOCUMENT	
a	Volume-IA	General conditions of contract (Supply) Not Applicable.
b	Volume-IB	General conditions of contract (Service) Applicable.
c	Volume-IC	Special conditions of contract (Supply) Not Applicable.
d	Volume-ID	Special conditions of contract (Service) Applicable.
e	Volume-IE	Forms and Procedures etc. Applicable.
f	Volume-IF	Technical Conditions of Contract (TCC) (CML, TS, DWG) Applicable.
g	Volume-III	Price Schedule (Absolute value) – Rev-00 Applicable.
iv	ISSUE OF TENDER DOCUMENTS	This is an E-tender floated online through our E-Procurement Site https://bhel.abcprocure.com . Start date of the tender: 06-12-2019 Applicable.
v	DUE DATE & TIME OF OFFER SUBMISSION	Date: 16-12-2019, Time: 15-00 Hrs. The bidder should respond by submitting their offer online in our e-Procurement platform at https://bhel.abcprocure.com only. Offers are invited in two-parts only. Hard copy bid or bids through email/fax shall not be accepted. Applicable.
vi	OPENING OF TENDER	Date: 16-12-2019 1 hour after the latest due date and time of Offer submission Notes: (1) In case the due date of opening of tender becomes a non-working day, tenders shall be opened on next working day at the same time. (2) Bidder may depute representative to witness the opening of tender. Applicable.
vii	EMD AMOUNT	Rs 13,04,380/- Applicable.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

viii	COST OF TENDER	Rs. 5,000/-.	Applicable.
ix	LAST DATE FOR SEEKING CLARIFICATION	Date: 11-12-2019 Along with soft version also, addressing to undersigned & to others as per contact address given below	Applicable.
x	SCHEDULE OF Pre Bid Discussion (PBD)	--	Not Applicable (In case BHEL decides to conduct PBD, date, time & venue of PBD will be intimated suitably thru TCN.)
xi	INTEGRITY PACT & DETAILS OF INDEPENDENT EXTERNAL MONITOR (IEM)	IEM DETAILS: Refer Clause No 34.0 below.	Applicable.
xii	Latest updates	Latest updates on the important dates, Amendments, Correspondences, Corrigenda, Clarifications, Changes, Errata, Modifications, Revisions, etc to Tender Specifications will be hosted in BHEL webpage (www.bhel.com) ; CPP portal & E-Procurement Site https://bhel.abcpocure.com only. Bidders to keep themselves updated with all such information.	Shall be intimated to bidder.

2.0 The offer shall be submitted as per the instructions of tender document and as detailed in this NIT. Bidders to note specifically that all pages of tender document, including these NIT pages of this particular tender together with subsequent correspondences shall be submitted by them, duly digitally signed & stamped on each page, as part of offer. Rates/Price including discounts/rebates, if any, mentioned anywhere/ in any form in the techno-commercial offer other than the Price Bid, shall not be entertained.

3.0 Unless specifically stated otherwise, bidder shall remit cost of tender (non-refundable) and courier charges if applicable, in the form of Demand Draft drawn in favour of Bharat Heavy Electricals Ltd, payable at Kolkata, issuing the Tender, along with techno-commercial offer.

4.0 Unless specifically stated otherwise, bidder shall have to deposit EMD through Demand Draft/Pay Order in favour of Bharat Heavy Electricals Ltd, payable at Kolkata. For other details please refer General Conditions of Contract.

Bidders may please be noted that "OEMD" provision stands deleted. Hence, bidders who have deposited Rs. 2 Lakh as OEMD are also requested to submit fresh EMD as mentioned in sl no vii under clause no 1.0 of NIT.

5.0 Procedure for Submission of Tenders: The Tenderers must submit their Tenders as detailed below:

DOCUMENTS TO BE UPLOADED & MODALITY OF UPLOADING

Sl no	Description	Remarks
PART-I A	(TECHNO COMMERCIAL BID)	
	CONTAINING THE FOLLOWING:-	
i.	Covering letter/Offer forwarding letter of Tenderer. (To be attached in relevant Attachment section)	
ii.	Duly filled-in 'No Deviation Certificate' as per prescribed format. (To be attached in relevant Attachment section)	

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

	Note: a. In case of any deviation, the same should be submitted separately for technical & commercial parts, indicating respective clauses of tender against which deviation is taken by bidder. The list of such deviation shall be attached in relevant attachment section of the e –procurement portal. It shall be specifically noted that deviation recorded elsewhere shall not be entertained. b. BHEL reserves the right to accept/reject the deviations without assigning any reasons, and BHEL decision is final and binding. i). In case of acceptance of the deviations, appropriate loading shall be done by BHEL ii). In case of unacceptable deviations, BHEL reserves the right to reject the tender	
iii.	Supporting documents/ annexures / schedules/ drawing etc as required in line with Pre-Qualification criteria.	
	It shall be specifically noted that all documents as per above shall be attached in relevant attachment section and credential certificates issued by clients shall distinctly bear the name of organization, contact ph no, FAX no, etc.	
iv.	All Amendments/Correspondences/Corrigenda/Clarifications/Changes/ Errata etc pertinent to this NIT. (To be attached in relevant Attachment section)	
v.	Integrity Pact Agreement (Duly signed by the authorized signatory)	Applicable.
vi.	Duly filled-in annexures, formats etc as required under this Tender Specification/NIT (To be attached in relevant Attachment section)	
vii.	Notice inviting Tender (NIT) (To be attached in relevant Attachment section)	
viii.	Volume – I F: Technical Conditions of Contract (TCC) (To be attached in relevant Attachment section)	
ix.	Volume – I D: Special Conditions of Contract (SCC)-Service (To be attached in relevant Attachment section)	
x.	Volume – I B : General Conditions of Contract (GCC)-Service (To be attached in relevant Attachment section)	
xii.	Volume – I E: Forms & Procedures etc. (To be attached in relevant Attachment section)	
xiii.	Volume–III - (UNPRICED – without disclosing rates/price, but mentioning only 'QUOTED' or 'UNQUOTED' against each item. (To be attached in Unpriced Bid Attachment section)	
xiv.	Any other details preferred by bidder with proper indexing. (To be attached in relevant Attachment section)	

PART-I B	EMD/ COST OF TENDER (To be submitted offline within due date of offer submission)	
	CONTAINING THE FOLLOWING:-	
i.	1. Earnest Money Deposit (EMD) in the form as indicated in this Tender 2. Cost of Tender (Demand Draft or copy of Cash Receipt as the case may be)	

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

PART-II	PRICE BID (TO BE ATTACHED IN PRICE BID ATTACHMENT SECTION)	
	CONTAINING THE FOLLOWING:-	
i	Covering letter/Offer forwarding letter of Tenderer enclosed in Part-I	
ii	Volume III – PRICE BID (Duly Filled in Schedule of Rates – rate/price to be entered in words as well as figures) Any other document uploaded in the price bid, apart from above tender format, shall not be taken into cognizance for evaluation of offer.	

SPECIAL NOTE:

- A) Your offer & documents submitted along with offer shall be digitally signed & stamped in each page by your authorised representative. No overwriting/ correction in tender documents by bidders shall be allowed. However, if correction is unavoidable, the same may be signed by authorized signatory.
- B) The credentials/ documents submitted towards compliance of Pre-qualification requirement shall be physically signed by the authorized signatory & stamped before uploading/submission with the offer in the e-procurement portal.
- C) All documents/ annexures submitted with the offer shall be properly attached in the respective sections. BHEL shall not be responsible for any missing documents.

6.0 No Deviation with respect to tender clauses and no additional clauses/ suggestions/ in Techno-commercial bid/ Price bid shall normally be considered by BHEL. Bidders are requested to positively comply with the same.

7.0 BHEL reserves the right to accept or reject any or all Offers without assigning any reasons thereof. BHEL also reserves the right to cancel the Tender wholly or partly without assigning any reason thereof. Also BHEL shall not entertain any correspondence from bidders in this matter (except for the refund of EMD).

8.0 Assessment of Capacity of Bidders:

Bidder's capacity for executing the job under tender shall be assessed 'LOAD' wise and 'PERFORMANCE' wise as per the following:

- I. **LOAD:** Load takes into consideration ALL the contracts of the Bidder under execution with BHEL Regions, irrespective of whether they are similar to the tendered scope or not. The cut off month for reckoning 'Load' shall be the 3rd Month preceding the month corresponding to the 'latest date of bid submission', in the following manner -
(Note: For example, if latest bid submission is in Jan 2017, then the 'load' shall be calculated up to and inclusive of Oct 2016)

Total number of Packages in hand = Load (P)

Where 'P' is the sum of all unit wise identified packages (refer table-1) under execution with BHEL Regions as on the cut off month defined above, including packages yet to be commenced, excepting packages which are on Long Hold.

- II. **PERFORMANCE:** Here 'Monthly Performance' of the bidder for all the packages (under execution/ executed during the 'Period of Assessment' in all Power Sector Regions of BHEL) SIMILAR to the packages covered under the tendered scope, excepting packages not commenced shall be taken into consideration. The 'Period of Assessment' shall be 6 months preceding and including the cut off month. The cut off month for reckoning 'Period of Assessment' shall be the 3rd Month preceding the month corresponding to 'latest date of bid submission', in the following manner:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

(Note: For example, if 'latest date of bid submission' is in Jan 2017, then the 'performance' shall be assessed for a 6 months' period up to and inclusive of Oct 2016 (i.e. from May 2016 to Oct 2016), for all the unit wise identified packages (refer Table I))

i). Calculation of Overall 'Performance Rating' for 'Similar Package/Packages' for the tendered scope under execution at Power Sector Regions for the 'Period of Assessment':

This shall be obtained by summing up the 'Monthly Performance Evaluation' scores obtained by the bidder in all Regions for all the similar Package/packages', divided by the total number of Package months for which evaluation should have been done, as per procedure below:

- $P_1, P_2, P_3, P_4, P_5, \dots, P_N$ etc. be the packages (under execution/ executed during the 'Period of Assessment' in all Regions of BHEL) SIMILAR to the packages covered under the tendered scope, excepting packages not commenced. Total number of similar packages for all Regions = P_T (i.e. $P_T = P_1 + P_2 + P_3 + P_4 + \dots + P_N$)
- Number of Months ' T_1 ' for which 'Monthly Performance Evaluation' as per relevant formats, should have been done in the 'Period of Assessment' for the corresponding similar package P_1 . Similarly T_2 for package P_2, T_3 for package P_3 , etc. for the tendered scope. Now calculate cumulative total months ' T_T ' for total similar Packages ' P_T ' for all Regions (i.e. $T_T = T_1 + T_2 + T_3 + T_4 + \dots + T_N$)
- Sum ' S_1 ' of 'Monthly Performance Evaluation' Scores ($S_{1-1}, S_{1-2}, S_{1-3}, S_{1-4}, S_{1-5}, \dots, S_{1-T_1}$) for similar package P_1 , for the 'period of assessment' ' T_1 ' (i.e. $S_1 = S_{1-1} + S_{1-2} + S_{1-3} + S_{1-4} + S_{1-5} + \dots + S_{1-T_1}$). Similarly, S_2 for package P_2 for period T_2 , S_3 for package P_3 for period T_3 etc. for the tendered scope for all Regions. Now calculate cumulative sum ' S_T ' of 'Monthly Performance Evaluation' Scores for total similar Packages ' P_T ' for all Regions (i.e. ' $S_T = S_1 + S_2 + S_3 + S_4 + S_5 + \dots + S_N$ ')
- Overall Performance Rating ' R_{BHEL} ' for the Similar Package/Packages (under execution/ executed during the 'Period of Assessment') in all the Power Sector Regions of BHEL

$$= \frac{\text{Aggregate of Performance scores for all similar packages in all the Regions}}{\text{Aggregate of months for each of the similar packages for which performance should have been evaluated in all the Regions}}$$

$$= \frac{S_T}{T_T}$$

- Bidders to note that the risk of non-evaluation or non-availability of the 'Monthly Performance Evaluation' reports as per relevant formats is to be borne by the Bidder.
- Table showing methodology for calculating 'a', 'b' and 'c' above

Sl. No.	Item Description	Details for all Regions							Total
(i)	(ii)	(iii)	(iv)	(v)	(vi)	(vii)	(viii)	(ix)	(x)
1	Similar Packages for all Regions → (under execution/ executed during period of assessment)	P_1	P_2	P_3	P_4	P_5	...	P_N	Total No. of similar packages for all Regions = P_T i.e. Sum (Σ) of columns (iii) to (ix)

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Sl. No.	Item Description	Details for all Regions							Total
(i)	(ii)	(iii)	(iv)	(v)	(vi)	(vii)	(viii)	(ix)	(x)
2	Number of Months for which 'Monthly Performance Evaluation' as per relevant formats should have been done in the 'period of assessment' for corresponding Similar Packages (as in row 1)	T ₁	T ₂	T ₃	T ₄	T ₅	...	T _N	Sum (Σ) of columns (iii) to (ix) = T _T
3	Monthly performance scores for the corresponding period (as in Row 2)	S ₁₋₁ , S ₁₋₂ , S ₁₋₃ , S ₁₋₄ , ... S _{1-T1}	S ₂₋₁ , S ₂₋₂ , S ₂₋₃ , S ₂₋₄ , ... S _{2-T2}	S ₃₋₁ , S ₃₋₂ , S ₃₋₃ , S ₃₋₄ , ... S _{3-T3}	S ₄₋₁ , S ₄₋₂ , S ₄₋₃ , S ₄₋₄ , ... S _{4-T4}	S ₅₋₁ , S ₅₋₂ , S ₅₋₃ , S ₅₋₄ , ... S _{5-T5}		S _{N-1} , S _{N-2} , S _{N-3} , S _{N-4} , ... S _{N-TN}	-----
4	Sum of Monthly Performance scores of the corresponding Package for the corresponding period (as in row-3)	S ₁	S ₂	S ₃	S ₄	S ₅	...	S _N	Sum (Σ) of columns (iii) to (ix) = S _T

- ii). Calculation of Overall 'Performance Rating' (R_{BHEL}) in case at least 6 evaluation scores for 'similar Package/Packages' for the tendered scope ARE NOT AVAILABLE, during the 'Period of Assessment':

This shall be obtained by summing up the 'Monthly Performance Evaluation' scores obtained by the bidder in all Regions for ALL the packages, divided by the total number of Package months for which evaluation should have been done. 'R_{BHEL}' shall be calculated subject to availability of 'performance scores' for at least 6 'package months' in the order of precedence below:

- 'Period of Assessment' i.e. 6 months preceding and including the cut-off month
- 12 months preceding and including the cut-off month
- 24 months preceding and including the cut-off month

In case, R_{BHEL} cannot be calculated as above, then Bidder shall be treated as 'NEW VENDOR'. Further eligibility and qualification of this bidder shall be as per definition of 'NEW VENDOR' described in 'Explanatory Notes'.

- iii). Factor "L" assigned based on Overall Performance Rating (R_{BHEL}) at Power Sector Regions:

Sl. no.	Overall Performance Rating (R _{BHEL})	Corresponding value of 'L'
1	=60	NA
2	> 60 and ≤ 65	0.4
3	> 65 and ≤ 70	0.35
4	> 70 and ≤ 75	0.25
5	> 75 and < 80	0.2
6	≥ 80	NA

III. 'Assessment of Capacity of Bidder':

'Assessment of Capacity of Bidder' is based on the Maximum number of packages for which a vendor is eligible, considering the performance scores of similar packages, as below:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Max number of packages $P_{Max} = (R_{BHEL} - 60)$ divided by corresponding value of 'L', i.e. $(R_{BHEL} - 60)/L$

Note:

- i). In case the value of P_{Max} results in a fraction, the value of P_{Max} is to be rounded off to next whole number
- ii). For $R_{BHEL} = 60$, $P_{Max} = '1'$
- iii). For $R_{BHEL} \geq 80$, there will be no upper limit on P_{Max}

The Bidder shall be considered 'Qualified' as per 'Assessment of Capacity of Bidder' for the subject Tender if $P \leq P_{Max}$

(Where P is calculated as per clause 'I' above)

Note: For the transition period of 1 year (i.e. for all the NITs floated between 11th May 2019 to 10th May 2020), in addition to above, 'Assessment of Capacity of Bidder' shall also be calculated considering 'performance scores' till 36 months as per Sl. no II ii).

Higher of the results obtained out of both shall be considered for 'Assessment of Capacity of Bidder'.

IV. Explanatory note:

- i). Similar package means Boiler or ESP or Piping or Turbine or Civil or Structure or Electrical or C&I etc. at the individual level irrespective of rating of Plant and irrespective of whether the subject tender is a single package or as part of combined/composite packages. Normally Boiler, ESP, Piping, Turbine, Electrical, C&I, Civil, Structure etc. is considered individual level of package. For example, in case the tendered scope is a Boiler Vertical Package comprising of Boiler, ESP and Power Cycle Piping (i.e. the 'identified packages as per Table-1 below), the 'PERFORMANCE' part against sl.no. II above, needs to be evaluated considering all the identified packages (i.e. Boiler, ESP and Power Cycle Piping) and finally the Bidder's capacity to execute the tendered scope is assessed in line with III above.

ii). Identified Packages (Unit wise)

Table-1

Civil	Electrical and C&I	Mechanical
i). Enabling works	i). Electrical	i). Boiler & Aux (All types including CW Piping if applicable)
ii). Pile and Pile Caps	ii). C&I	ii). Power Cycle Piping/Critical Piping
iii). Civil Works including foundations	iii). Others (Elect. and C&I)	iii). ESP
iv). Structural Steel Fabrication & Erection		iv). LP Piping
v). Chimney		v). Steam Turbine Generator set & Aux
vi). Cooling Tower		vi). Gas Turbine Generator set & Aux
vii). Others (Civil)		vii). Hydro Turbine Generator set & Aux
		viii). Turbo Blower (including Steam Turbine)
		ix). Material Management
		x). Others (Mechanical)

- iii). Bidders who have not been evaluated for at least six package months in the last 24 months preceding and including the Cut-off month in the online BHEL system for contractor performance evaluation in BHEL PS Regions, shall be considered "NEW VENDOR".

A 'NEW VENDOR' shall be considered qualified subject to satisfying all other tender conditions.

A 'NEW VENDOR' if awarded a job (of package/packages identified under this clause) shall be tagged as "FIRST TIMER" on the date of first LOI from BHEL.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

The "FIRST TIMER" tag shall remain till completion of all the contracts against which vendor has been tagged as First Timer or availability of 6 evaluation scores within last 24 months preceding and including the Cut-off month in the online BHEL system for contractor performance evaluation in BHEL PS Regions.

A Bidder shall not be eligible for the next job as long as the Bidder is tagged as "FIRST TIMER" excepting for the Tenders which have been opened on or before the date of the bidder being tagged as 'FIRST TIMER'.

After removal of 'FIRST TIMER' tag, the Bidder shall be considered 'QUALIFIED' for the future tenders subject to satisfying all other tender conditions including 'Assessment of Capacity of Bidders'.

- iv). Consequent upon applying the criteria of 'Assessment of Capacity of Bidders' detailed above on all the bidders qualified against Technical and Financial Qualification criteria, if the number of qualified bidders reduces to less than four, then for further processing of the Tender, BHEL at its discretion reserves the right to also consider the bidders who are "not qualified" as per criteria of 'Assessment of Capacity of Bidders' and for this, procedure described in following three options shall be followed:
- All the bidders having Overall Performance Rating ('R_{BHEL}') ≥ 60 shall be considered qualified against criteria of 'Assessment of Capacity of Bidders'.
 - If even after using option "a", the number of qualified bidders remains less than four, then in addition to bidders considered as per option "a", "First timer" bidders having average of available performance scores ≥ 60 upto and including the Cut Off month shall also be considered qualified against criteria of 'Assessment of Capacity of Bidders'.
 - If even after using option "a" and "b", the number of qualified bidders remains less than four, then in addition to bidders considered as per option "a" and "b", "First timer" bidders for whom no performance score is available in the system upto and including the Cut Off month, shall also be considered qualified against criteria of 'Assessment of Capacity of Bidders'.

Note:- In case, the number of bidders qualified against Technical and Financial Qualification criteria itself is less than four, then all bidders (a)- having Overall Performance Rating ('R_{BHEL}') ≥ 60 , (b)- First timer" bidders having average of available performance scores ≥ 60 upto and including the Cut Off month, (c)- "First timer" bidders for whom no performance score is available in the system upto and including the Cut Off month, shall be considered qualified against criteria of 'Assessment of Capacity of Bidders' for further processing of tender.

- v). 'Under execution' shall mean works in progress as per the following:
- Up to execution of 90% of anticipated Contract Value in case of Civil, MM, Structural and Turbo Blower Packages
 - Up to Steam Blowing in case of Boiler/ESP/Piping Packages
 - Up to Synchronization in all Balance Packages

Note: BHEL at its discretion can extend (or reduce in exceptional cases in line with Contract conditions) the period defined against (a), (b) and (c) above, depending upon the balance scope of work to be completed.

- vi). Contractor shall provide the latest contact details i.e. mail-ID and Correspondence Address to SCT Department, so that same can be entered in the Contractor Performance Evaluation System, and in case of any change/discrepancy same shall be informed immediately. Login Details for viewing scores in Contractor Performance Evaluation System shall be provided to the Contractor by SCT Department.
- vii). Performance Evaluation for Activity Month shall be completed in Evaluation Month (i.e. month next to Activity Month) or in rare cases in Post Evaluation Month (i.e. month next to Evaluation Month) after approval from Competent Authority. In case scores are not acceptable, Contractor can submit Review Request to GM Site/ GM Project latest by 25th of Evaluation Month or 3 days after approval of score, whichever is later. However, acceptance/rejection of 'Review Request' solely depends on the discretion

of GM Site/GM Project. After acceptance of Review Request, evaluation score shall be reviewed at site and the score after completion of review process shall be acceptable and binding on the contractor.

viii). Project on Hold due to reasons not attributable to bidder -

a. Short hold: Evaluation shall not be applicable for this period, however Loading will be considered.

b. Long hold: Short hold for continuous six months and beyond or hold on account of Force Majeure shall be considered as Long Hold. Evaluation as well as Loading shall not be considered for this period.

ix). Performance evaluation in CL 8 above is applicable to Prime bidder and Consortium partner (or Technical tie up partner) for their respective scope of work.

- 9.0 Since the job shall be executed at site, bidders must visit site/ work area and study the job content, facilities available, availability of materials, prevailing site conditions including law & order situation, applicable wage structure, wage rules, etc before quoting for this tender. They may also consult this office before submitting their offers, for any clarifications regarding scope of work, facilities available at sites or on terms and conditions.
- 10.0 For any clarification on the tender document, the bidder may seek the same in writing, through e-mail or through E-Procurement Site <https://bhel.abcprocure.com>, as per specified format, within the scheduled date for seeking clarification, from the office of the undersigned. BHEL shall not be responsible for receipt of queries after due date of seeking clarification due to any delay. Any clarification / query received after last date for seeking clarification may not be normally entertained by BHEL and no time extension will be given.
- 11.0 BHEL may decide holding of pre-bid discussion [PBD] with all intending bidders as per date indicated in the NIT. The bidder shall ensure participation for the same at the appointed time, date and place as may be decided by BHEL. Bidders shall plan their visit accordingly. The outcome of pre-bid discussion (PBD) shall also form part of tender.
- 12.0 In the event of any conflict between requirement of any clause of this specification/ documents/drawings/data sheets etc or requirements of different codes/standards specified, the same to be brought to the knowledge of BHEL in writing for clarification before due date of seeking clarification (whichever is applicable), otherwise, interpretation by BHEL shall prevail. Any typing error/missing pages/ other clerical errors in the tender documents, noticed must be pointed out before pre-bid meeting/submission of offer else BHEL's interpretation shall prevail.
- 13.0 Unless specifically mentioned otherwise, bidder's quoted price shall deemed to be in compliance with tender including PBD.
- 14.0 Bidders shall submit Integrity Pact Agreement (Duly signed by authorized signatory who signs in the offer), along with techno - commercial bid. This pact shall be considered as a preliminary qualification for further participation. The names and other details of Independent External Monitor (IEM) for the subject tender is as given at point (xi) of 1 above.
- 15.0 The Bidder has to satisfy the Pre Qualifying Requirements stipulated for this Tender in order to be qualified. The Price Bids of only those bidders will be opened who will be qualified for the subject job on the basis of satisfying the Pre Qualification Criteria specified in this NIT as per Annexure-1 (as applicable), past performance etc. and date of opening of price bids shall be intimated to only such bidders. BHEL reserves the right not to consider offers of parties under HOLD.
- 16.0 In case BHEL decides on a 'Public Opening', the date & time of opening of the PRICE BID shall be intimated to the qualified bidders and in such as case, price bid (Volume-III) uploaded in E-procurement Site <https://bhel.abcprocure.com> will be opened.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- 17.0 Validity of the offer shall be for six months from the latest due date of offer submission (including extension, if any) unless specified otherwise.
- 18.0 BHEL reserves the right to go for Reverse Auction (RA) (Guidelines as available on www.bhel.com) instead of opening the sealed envelope price bid, submitted by the bidder. This will be decided after techno-commercial evaluation. Bidders to give their acceptance with the offer for participation in RA. Non-acceptance to participate in RA may result in non-consideration of their bids, in case BHEL decides to go for RA.

However, if reverse auction process is not adopted or is unsuccessful for whatsoever reason, absolute value price bid (Volume-III) uploaded in E-Procurement Site <https://bhel.abcpurchase.com> will be opened for deciding the successful bidder. BHEL's decision in this regard will be final & binding on bidder.

Those bidders who have given their acceptance to participate in Reverse Auction will have to necessarily submit 'Process compliance form' (to the designated service provider) as well as 'Online sealed bid' in the Reverse Auction. Non-submission of 'Process compliance form' or 'Online sealed bid' by the agreed bidder(s) will be considered as tampering of the tender process and will invite action by BHEL as per extant guidelines for suspension of business dealings with suppliers/ contractors (as available on www.bhel.com).

The bidders have to necessarily submit online sealed bid less than or equal to their envelope sealed price bid already submitted to BHEL along with the offer. The envelope sealed price bid of successful L 1 bidder in RA, if conducted, shall also be opened after RA and the order will be placed on lower of the two bids (RA closing price & envelope sealed price) thus obtained. The bidder having submitted this offer specifically agrees to this condition and undertakes to execute the contract on thus awarded rates.

If it is found that L 1 bidder has quoted higher in online seal bid in comparison to envelope sealed bid for any item(s), the bidder will be issued a warning letter to this effect. However, if the same bidder again defaults on this count in any subsequent tender in the unit, it will be considered as fraud and will invite action by BHEL as per extant guidelines for suspension of business dealings with suppliers/ contractors (as available on www.bhel.com).

As a reminder to the bidders, system will flash following message (in Red Color) during the course of 'online sealed bid':

"Bidders to submit online sealed bid less than or equal to their envelope sealed bid already submitted to BHEL"

In case BHEL decides to go for reverse auction, the H1 bidder (whose quote is highest in online sealed bid) may not be allowed to participate in further RA process.

- 19.0 On submission of offer, further consideration will be subject to compliance to tender & qualifying requirement and customer's acceptance, as applicable.
- 20.0 In case the bidder is an "Indian Agent of Foreign Principals", 'Agency agreement has to be submitted along with Bid, detailing the role of the agent along with the terms of payment for agency commission in INR, along with supporting documents.
- 21.0 The bidders shall not enter into any undisclosed M.O.U. or any understanding amongst themselves with respect to tender.
- 22.0 Consortium Bidding (or Technical Tie up) shall be allowed only if specified in Pre Qualifying Requirement (PQR) criteria, and in such a case the details to be complied with is enclosed herewith as per Annexure-5 UNLESS SPECIFIED OTHERWISE IN PQR.
- 23.0 The bidder shall submit documents in support of possession of 'Qualifying Requirements' duly self certified and stamped/ digitally signed (as applicable) by the authorized signatory, indexed and properly linked in the format for PQR. In case BHEL requires any other documents/proofs, these shall be submitted immediately.

- 24.0 The bidder may have to produce original document for verification if so decided by BHEL.
- 25.0 The offers of the bidders who are on the banned list as also the offer of the bidders, who engage the services of the banned firms, shall be rejected. The list of banned firms is available on BHEL Website (www.bhel.com).

I) Integrity commitment, performance of the contract and punitive action thereof:

a) Commitment by BHEL:

BHEL commits to take all measures necessary to prevent corruption in connection with the tender process and execution of the contract. BHEL will during the tender process treat all Bidder(s) in a transparent and fair manner, and with equity.

b) Commitment by Bidder/ Supplier/ Contractor:

b.i) The bidder/ supplier/ contractor commit to take all measures to prevent corruption and will not directly or indirectly influence any decision or benefit which he is not legally entitled to nor will act or omit in any manner which tantamount to an offence punishable under any provision of the Indian Penal Code, 1860 or any other law in force in India.

b.ii) The bidder/ supplier/ contractor will, when presenting his bid, disclose any and all payments he has made, and is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract and shall adhere to relevant guidelines issued from time to time by Govt. of India/ BHEL.

b.iii) The bidder/ supplier/ contractor will perform/ execute the contract as per the contract terms & conditions and will not default without any reasonable cause, which causes loss of business/ money/ reputation, to BHEL.

If any bidder/ supplier/ contractor during pre-tendering/ tendering/ post tendering/ award/ execution/ post-execution stage includes in mal-practices, cheating, bribery, fraud or and other misconduct or formation of cartel so as to influence the bidding process or influence the price or acts or omits in any manner which tantamount to an offence punishable under any provision of the Indian Penal code, 1860 or any other law in force in India, then, action may be taken against such bidder/ supplier/ contractor as per extant guidelines of the company available on www.bhel.com and/ or under applicable legal provisions.

- 26.0 It may please be noted that Guidelines/Rules in respect of Suspension of business dealings (Hold- 12 to 24 Months/ Banning – 3 years etc), Vendor Evaluation formats, quality, safety and HSE guidelines , standard T&P hire charges of BHEL etc may undergo change from time to time and the latest one shall be followed. Latest “Guidelines for Vendor Evaluation” is web based, quality, safety & HSE”; standard T&P hire charges shall be available at site and shall be given to the successful vendors/ subcontractors during execution.
- 27.0 MSE suppliers can avail the intended benefits in respect of the procurements related to the Goods and Services only (Definition of Goods and Services as enumerated by Govt. of India vide Office Memorandum F. No. 21(8)/2011-MA dtd. 09/11/2016 office of AS & DC, MSME) if they submit along with the offer, attested copies of either EM II certificate having deemed validity (five years from the date of issue of acknowledgement in EM II) or valid NSIC certificate or Udyog Aadhar Memorandum (UAM) & Acknowledgement or EM II certificate along with attested copy of a CA certificate (Format enclosed at Annexure – C where deemed validity of EM II certificate of five years has expired) applicable for the relevant financial year (latest audited). Date to be reckoned for determining the deemed validity will be the date of bid opening (Part 1 in case of two part bid). Non submission of such documents will lead to consideration of their bid at par with other bidders. No benefit shall be applicable for this enquiry if any deficiency in the above required documents are not submitted before price bid opening. If the tender is to be submitted through e-procurement portal, then the above required documents are to be uploaded on the portal. Documents should be notarized or attested by a Gazetted officer.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Any Bidder falling under MSME category, shall furnish the following details & submit documentary evidence/Govt. Certificate etc. in support of the same along with their techno-commercial offer: -

Type under MSME	SC/ST owned	Women owned	Others
Micro			
Small			
Medium			

Note: - If the bidder does not furnish the above, offer shall be processed construing that the bidder is not falling under MSME category.

- 28.0 The bidder along with its associates/collaborators/sub-contractors/sub-vendors/consultants/service providers shall strictly adhere to BHEL Fraud Prevention Policy displayed on BHEL website www.bhel.com and shall immediately bring to the notice of BHEL Management about any fraud or suspected fraud as soon as it comes to their notice.
- 29.0 Annexure-A -Amendment to GCC/SCC shall be read in conjunction with GCC-Volume-IB & SCC-Volume-ID. This Annexure-A (Amendment to GCC/SCC) of NIT shall not be considered as part of the NIT but addendum/corrigendum to the GCC/SCC only.
- 30.0 Annexure-B - Terms & conditions of Reverse Auction is enclosed herewith.
- 31.0 Annexure-D – Specific Clause w.r.t. BOCW Act & Cess Act is enclosed herewith.
- 32.0 Annexure-E- Statewise GST Registration nos. is enclosed herewith.
- 33.0 Duly filled & signed Annexure- CPP-GST/I to be submitted by bidders along with their techno-commercial offer.
- 34.0 Integrity Pact (IP) –

(a) IP is a tool to ensure that activities and transactions between the Company and its Bidders/ Contractors are handled in a fair, transparent and corruption free manner. Following Independent External Monitors (IEMs) on the present panel have been appointed by BHEL with the approval of CVC to oversee implementation of IP in BHEL.

SI	IEM	Address	Email
1.	Shri Arun Chandra Verma, IPS (Retd.)	Flat No. C -1204, C Tower, Amrapali, Platinum Complex, Sector 119, Noida (U.P.)	acverma1@gmail.com
2.	Shri Virendra Bahadur Singh, IPS (Retd.)	H. No. B-5/64, Vineet Khand, Gomti Nagar, Lucknow - 226010	vbsinghips@gmail.com

- (b) The IP as enclosed with the tender is to be submitted (duly signed by authorized signatory) along with techno-commercial bid (Part-I, in case of two/three part bid). Only those bidders who have entered into such an IP with BHEL would be competent to participate in the bidding. In other words, entering into this Pact would be a preliminary qualification.
- (c) Please refer Section-8 of IP for Role and Responsibilities of IEMs. In case of any complaint arising out of the tendering process, the matter may be referred to any of the above IEM(s). All correspondence with the IEMs shall be done through email only.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Note:

No routine correspondence shall be addressed to the IEM (phone/ post/ email) regarding the clarifications, time extensions or any other administrative queries, etc. on the tender issued. All such clarification/ issues shall be addressed directly to the tender issuing (procurement) department's officials whose contact details are provided below:

Details of contact person(s):

Name	Papori Boro/ Anupriya Mundu	Subrata Sen
Dept	SCT Dept, BHEL PSER, Kolkata	SCT Dept, BHEL PSER, Kolkata
Address	DJ-9/1, Sector – II, Salt Lake, Kolkata – 700091	DJ-9/1, Sector – II, Salt Lake, Kolkata – 700091
Phone	033-2339 8231/8236	033-2339 8226
Email	papori@bhel.in/ anupriya.mundu@bhel.in	subrata.sen@bhel.in
FAX	033-2321 1960	033-2321 1960

35.0 For this procurement, Public Procurement (Preference to Make in India), Order 2017 dated 15.06.2017 & 28.05.2018 and subsequent Orders issued by the respective Nodal Ministry shall be applicable even if issued after issue of this NIT but before finalization of contract/ PO/ WO against this NIT.
In the event of any Nodal Ministry prescribing higher or lower percentage of purchase preference and/ or local content in respect of this procurement, same shall be applicable.

36.0 Bidders are requested to submit their best price as per latest price schedule of the tender.

37.0 It may please be noted that Bid should be free from correction, overwriting, using corrective fluid, etc. Any interlineation, cutting, erasure or overwriting shall be valid only if they are attested under full signature(s) of person(s) signing the bid, else bid shall be liable for rejection.

All overwriting/ cutting, etc will be numbered by bid opening officials and announced during bid opening.

38.0 Order of Precedence

In the event of any ambiguity or conflict between the Tender Documents, the order of precedence shall be in the order below:

- Amendments/Clarifications/Corrigenda/Errata etc issued in respect of the tender documents by BHEL
- Notice Inviting Tender (NIT)
- Price Bid-Volume-III
- Technical Conditions of Contract (TCC) -- Volume-IF
- Special Conditions of Contract (SCC) —Volume-ID
- General Conditions of Contract (GCC) —Volume-IB
- Forms and Procedures —Volume-IE

for BHARAT HEAVY ELECTRICALS LTD

Sr. Engr (SCT)

Agency	Contact details
BHEL, PSER, Kolkata	Address DJ-9/1, Sector – II, Salt Lake, Kolkata – 700 091
	Phone no 033-2339 8231/ 8236/ 8000
	FAX no 033-23211960
	E-mail papori@bhel.in / anupriya.mundu@bhel.in / subrata.sen@bhel.in

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Enclosure

01. Annexure-1: Pre Qualification Criteria.
02. Annexure-2: Format for No deviation Certificate.
03. Annexure-3: Format for seeking clarification.
04. Annexure-4: Check List.
05. Annexure-5: Conditions for consortium/tie up.
06. Annexure –A- Amendment to GCC/SCC.
07. Annexure -B- Terms & conditions of Reverse Auction.
08. Annexure –C- CA certificate Format.
09. Annexure-D – Specific Clause w.r.t. BOCW Act & Cess Act.
10. Annexure-E- Statewise GST Registration nos.
11. Annexure– CPP-GST/I.
12. Integrity Pact Agreement Format (Separate).
13. Other Tender documents as per this NIT.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE-1PRE QUALIFICATION CRITERIA

JOB	BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARPURA STPP, JHARKHAND.
TENDER NO	PSER:SCT:NKP-C1999:19

SL. NO.	CRITERIA
1.0	BIDDERS SHOULD HAVE AVERAGE ANNUAL TURNOVER OF MINIMUM RS 1.96 CRORES DURING THE LAST 3 (THREE) FINANCIAL YEARS, ENDING ON 31-03-2019 AND SHOULD HAVE POSITIVE NET WORTH AS ON 31-03-2019 BIDDER MUST HAVE EARNED PROFIT IN ANY ONE OF THE LAST THREE FINANCIAL YEARS ENDING ON 31-03-2019. AUDITED BALANCE SHEET AND PROFIT & LOSS ACCOUNT OF THE COMPANY FOR LAST 3 (THREE) FINANCIAL YEARS, ENDING ON 31-03-2019 NEED TO BE SUBMITTED IN SUPPORT OF ABOVE. IN CASE AUDITED BALANCE SHEET AND PROFIT AND LOSS ACCOUNT HAS NOT BEEN SUBMITTED FOR ALL THREE YEARS INDICATED ABOVE THEN THE APPLICABLE FINANCIAL AUDITED STATEMENTS SUBMITTED BY THE BIDDERS AGAINST THE REQUISITE THREE YEARS WILL BE AVERAGED FOR THREE YEARS. IF FINANCIAL STATEMENTS ARE NOT REQUIRED TO BE AUDITED STATUTORILY, THEN INSTEAD OF AUDITED FINANCIAL STATEMENTS, FINANCIAL STATEMENTS ARE REQUIRED TO BE CERTIFIED BY THE CHARTERED ACCOUNTANT.
2.1	BIDDER SHOULD HAVE EXECUTED CIVIL RCC WORKS IN ANY INDUSTRIAL/ POWER PROJECT DURING THE LAST 7 (SEVEN) YEARS, ENDING ON THE LATEST DATE OF BID SUBMISSION, VALUE OF WHICH SHOULD NOT BE LESS THAN EITHER OF THE FOLLOWING : A) 1 (SINGLE) WORK OF VALUE NOT LESS THAN Rs. 5.22 CRORE OR B) 2 (TWO) WORKS OF VALUE NOT LESS THAN Rs. 3.26 CRORE EACH OR C) 3 (THREE) WORKS OF VALUE NOT LESS THAN Rs. 2.61 CRORE EACH RELEVANT DOCUMENT IN SUPPORT OF ABOVE SHALL BE SUBMITTED.
2.2	BIDDER SHOULD HAVE EXECUTED THE FOLLOWING JOB IN ANY POWER/ INDUSTRIAL PROJECT(S) DURING LAST 7 (SEVEN) YEARS, ENDING ON THE LATEST DUE DATE OF SUBMISSION OF OFFER. RELEVANT DOCUMENT IN SUPPORT OF ABOVE SHALL BE SUBMITTED.
2.2.1	ATLEAST 1295 CUBIC MTR RCC QUANTITIES WITHIN A PERIOD OF TWELVE CONSECUTIVE MONTHS IN CUMULATIVE OF TWO COMPLETED/RUNNING CONTRACTS. OR ATLEAST 863 CUBIC MTR RCC QUANTITIES WITHIN A PERIOD OF TWELVE CONSECUTIVE MONTHS IN ONE COMPLETED/RUNNING CONTRACT.
3.0	BIDDER SHOULD HAVE VALID PAN. RELEVANT DOCUMENT IN SUPPORT OF ABOVE SHALL BE SUBMITTED.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

4.0	CONSORTIUM/ JV BIDDING IS NOT ALLOWED

GENERAL REQUIREMENT AND EXPLANATORY NOTE:

(BIDDER SHALL SPECIFICALLY NOTE FOLLOWING POINTS WHICH ALSO FORM MANDATORY REQUIREMENT FOR CONSIDERATION / PROCESSING OF OFFER)

A.	EXECUTED MEANS BIDDER SHOULD HAVE ACHIEVED THE CRITERIA SPECIFIED IN THE PRE-QUALIFICATION CRITERIA EVEN IF THE CONTRACT HAS NOT BEEN COMPLETED OR CLOSED
B.	AFTER SATISFACTORY FULFILLMENT OF ALL THE ABOVE CRITERIA, OFFER SHALL BE CONSIDERED FOR FURTHER EVALUATION AS PER NIT AND ALL OTHER TERMS OF THE TENDER.
C.	BIDDER SHOULD FURNISH INFORMATION REGARDING PROJECTS IN HAND, CURRENT LITIGATION, ORDERS REGARDING EXCLUSION/EXPULSION OR BLACK LISTING.
D.	BIDDER SHALL SUBMIT ABOVE PRE-QUALIFICATION CRITERIA FORMAT, DULY FILLED-IN, SPECIFYING RESPECTIVE ANNEXURE NUMBER AGAINST EACH CRITERIA AND FURNISH RELEVANT DOCUMENT IN THE RESPECTIVE ANNEXURES IN THEIR OFFER.
E.	BIDDER MUST NOT BE UNDER BANKRUPTCY CODE PROCEEDINGS (IBC) BY NCLT OR UNDER LIQUIDATION /BIFR, WHICH WILL RENDER HIM INELIGIBLE FOR PARTICIPATION IN THIS TENDER AND SHALL SUBMIT UNDERTAKING TO THIS EFFECT.
F.	EXISTING VENDOR / CONTRACTOR DEPLOYED BY BHEL AGAINST TENDER No: PSER:SCT:NKP-C1629:4090 DATED 25.11.14 FOR THE JOB OF CIVIL PACKAGE-A (CIVIL, STRUCTURAL & ARCHITECTURAL WORKS ETC OF BTG AREA FOR UNIT # 1 & 3 FOR 3X660 MW NORTH KARANPURA STPP, JHARKHAND) SHALL NOT BE ALLOWED TO PARTICIPATE IN THE SUBJECT TENDER. EXISTING CONTRACTOR WILL INCLUDE: - IN CASE EXISTING CONTRACTOR IS THE SOLE PROPRIETORSHIP FIRM, ANY SOLE PROPRIETORSHIP FIRM OWNED BY SAME SOLE PROPRIETOR. - IN CASE EXISTING CONTRACTOR IS THE PARTNERSHIP FIRM, ANY FIRM COMPRISING OF SAME PARTNERS / SOME OF THE SAME PARTNERS (BUT NOT INCLUDING ANY NEW PARTNER) OR SOLE PROPRIETORSHIP FIRM OWNED BY ANY PARTNER(S) AS A SOLE PROPRIETOR.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Explanatory Notes for the PQR (unless otherwise specified in the PQR):

1. Bidder to submit Audited Balance Sheet and Profit and Loss Account for the respective years as indicated along with all annexures.
2. In case audited Financial statements have not been submitted for all the three years as indicated, then the applicable audited statements submitted by the bidders against the requisite three years, will be averaged for three years i.e total divided by three.
3. NETWORTH : Shall be calculated based on the latest Audited Accounts as furnished. Net worth = Paid up share capital + Reserves. (Net worth is required to be evaluated in case of companies)
4. PROFIT : shall be NET profit (PAT + Non cash expenditure viz depreciation) earned during any one of the three financial years.
5. 'Additional' Criteria in respect of 'Technical' criteria of PQR for Civil, Electrical, CI, unless otherwise specified:
 - i) 'Similar' work means
 - a. Piling or Civil or Structure or 'Civil and Structural works' or RCC Chimney or RCC Cooling Tower or RCC Silo or Mill Bunker or any combination of these shall be considered similar works for all packages mentioned under 'CIVIL WORKS'
 - b. Electrical or C&I or 'Electrical and C&I' shall be considered similar works for all packages mentioned under 'ELECTRICAL AND C&I WORKS'
6. Completion date for achievement of the 'Technical' criteria of PQR will be the last 7 years ending on the 'latest date of Bid submission' of Tender irrespective of date of the start of work
7. 'EXECUTED' means the bidder should have achieved the criteria specified in the Technical criteria of PQR even if the Contract has not been completed or closed
8. Unless otherwise specified, for the purpose of 'Technical' criteria of PQR, the word 'EXECUTED' means achievement of milestones as defined below:
 - a. "ACHIEVEMENT OF PHYSICAL QUANTITIES" as per respective PQRs.
 - b. "READINESS FOR COAL FILLING" in respect of Mill Bunker.
 - c. "CHARGING" in respect of Power Transformers / Bus Ducts / "HT/LT Switchgears" / "HT / LT Cabling".
 - d. For C&I works: "SYNCHRONISATION" in case of power project and "WORK COMPLETION of the value as defined in PQR" in case of industry.
 - e. "BOILER LIGHT UP" in respect of Boiler / CFBC / ESP.
 - f. "GAS IN" in respect of HRSG.
 - g. "STEAM BLOWING COMPLETION" in respect of Power Cycle Piping.
 - h. "HYDRAULIC TEST" of the system in respect of Pressure parts / LP Piping / CW Piping.
 - i. "FULL LOAD OPERATION OF THE UNIT" in respect of Insulation work.
 - j. "SYNCHRONISATION" in respect of STG / GTG.
 - k. "SPINNING" in respect of HTG.
 - l. "COMPLETION AND HANDING OVER FOR MECHANICAL ERECTION" in respect of STG Deck and Machine/Equipment foundation.
9. Boiler means HRSG or WHRB or any other types of Steam Generator
10. Power Cycle piping means Main Steam, Hot Reheat, Cold Reheat, HP Bypass
11. For the purpose of evaluation of the PQR, one MW shall be considered equivalent to 3.5TPH where ever rating of HRSG/BOILER is mentioned in MW. Similarly, where ever rating of Gas Turbine is mentioned in terms of Frame size, ISO rating in terms of MW shall be considered for evaluation.
12. In case the experience/PO/WO certificate enclosed by bidders do not have separate break up prices for the E&C portion of Electrical and CI Works, (i.e. the certificates enclosed are for composite order for supply and erection of Electrical & CI and other works if any), then value of Erection and Commissioning for the Electrical & CI portion shall be considered as 15% of the supply & erection of Electrical & CI, unless otherwise specifically indicated in the PQR.
13. Scope for capital overhaul of STG shall cover Bearing Inspection work and overhauling of all cylinders of the Turbine.
14. In case the tendered scope is not a Pulverised Fuel Boiler, experience of Oil/Gas Fired Boilers also can be considered.
15. Value of work is to be updated with indices for "All India Avg. Consumer Price index for industrial workers" and "Monthly Whole Sale Price Index for All Commodities" with base month as per last month of work execution and indexed up to three (3) months prior to the month of latest due date of bid submission as per following formula-

$$P = R + 0.425 \times R \times \frac{(X_N - X_0)}{X_0} + 0.425 \times R \times \frac{(Y_N - Y_0)}{Y_0}$$

Where

P = Updated value of work

R = Value of executed work

X_N = All India Avg. Consumer Price index for industrial workers for three months prior to the month of latest due date of bid submission (e.g. If latest bid submission date is 02-Mar-17, then bid submission month shall be reckoned as March'17 and index for Dec'2016 shall be considered).

X_0 = All India Avg. Consumer Price index for industrial workers for last month of work execution

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Y_N = Monthly Whole Sale Price Index for All Commodities for three months prior to the month of latest due date of bid submission (e.g. If latest bid submission date is 02-Mar-17, then bid submission month shall be reckoned as March'17 and index for Dec'2016 shall be considered).

Y_0 = Monthly Whole Sale Price Index for All Commodities for last month of work execution

16. PROFIT shall be PBT earned during any one year of last three financial years as mentioned in PQR.
17. For evaluation of PQR, the credentials of the Bidder alone, and not that of the Group Company shall be considered.
18. "Executed" means the bidder should have achieved the criteria specified in the PQR even if the Contract has not been completed or closed.
19. Bidder must not be under Bankruptcy Code Proceedings (IBC) by NCLT or under Liquidation / BIFR, which will render him ineligible for participation in this tender, and shall submit undertaking to this effect.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE - 2**FORMAT FOR NO DEVIATION CERTIFICATE**
(To be submitted in the bidder's letter head)

BHARAT HEAVY ELECTRICALS LIMITED,
Power Sector - Eastern Region,
Plot no 9/1, DJ Block, Sector – II, Salt Lake City,
Kolkata – 700 091

Sub	No Deviation Certificate.	
Job	Balance Civil and Architectural works etc. of BTG area for Unit # 1 & 3 of 3x660 MW North Karanpura STPP, Jharkhand.	
Ref	1.0	Tender no PSER:SCT:NKP-C1999:19
	2.0	BHEL's NIT, vide reference no PSER:SCT:NKP-C1999:7686 Date: 06-12-2019.
	3.0	All other pertinent issues till date.

Dear Sirs,

With reference to above, this is to confirm that as per tender conditions, we have visited site before submission of our offer and noted the job content & site conditions etc. We also confirm that we have not changed/ modified the tender documents as appeared in the website/ issued by you and in case of such observance at any stage, it shall be treated as null and void.

We hereby confirm that we have not taken any deviation from tender clauses together with other references as enumerated in the above referred NIT. We hereby confirm our unqualified acceptance to all terms & conditions, unqualified compliance to technical specification, integrity pact (if applicable) and acceptance to reverse auctioning process.

In the event of observance of any deviation in any part of our offer at a later date whether implicit or explicit, the deviations shall stand null & void.

We confirm to have submitted/uploaded offer/documents in accordance with tender instructions with acceptance of the terms & conditions of the tender by us and as per aforesaid references.

Thanking you,

Yours faithfully,

(Signature, date & seal of authorized
representative of the bidder)

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE - 3**FORMAT FOR SEEKING CLARIFICATION**

JOB	Balance Civil and Architectural works etc. of BTG area for Unit # 1 & 3 of 3x660 MW North Karanpura STPP, Jharkhand.
TENDER NO	PSER:SCT:NKP-C1999:19

Sl no	Reference clause of tender document	Existing provision	Bidder's query	BHEL's clarification

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE - 4**CHECK LIST**

NOTE:- Tenderers are required to fill in the following details and no column should be left blank

1	Name and Address of the Tenderer		
2	Details about type of the Firm/Company		
3.a	Details of Contact person for this Tender	Name : Mr/Ms Designation: Telephone No: Mobile No: Email ID: Fax No:	
3.b	Details of alternate Contact person for this Tender	Name : Mr/Ms Designation: Telephone No: Mobile No: Email ID: Fax No:	
4	EMD DETAILS	DD No: Date : Bank : Amount: <u>Please tick (✓) whichever applicable:-</u> ONE TIME EMD / ONLY FOR THIS TENDER	
5	Validity of Offer	TO BE VALID FOR SIX MONTHS FROM DUE DATE	
		APPLICABILITY(BY BHEL)	ENCLOSED BY BIDDER
6	Whether the format for compliance with PRE QUALIFICATION CRITERIA (ANNEXURE-I) is understood and filled with proper supporting documents referenced in the specified format	Applicable	YES / NO
7	Audited profit and Loss Account for the last three years	Applicable/Not Applicable	YES/NO
8	Copy of PAN Card	Applicable/Not Applicable	YES/NO
9	Whether all pages of the Tender documents including annexures, appendices etc are read understood and signed	Applicable/Not Applicable	YES/NO
10	Integrity Pact	Applicable/Not Applicable	YES/NO
11	Declaration by Authorised Signatory	Applicable/Not Applicable	YES/NO
12	No Deviation Certificate	Applicable/Not Applicable	YES/NO
13	Declaration confirming knowledge about Site Conditions	Applicable/Not Applicable	YES/NO
14	Declaration for relation in BHEL	Applicable/Not Applicable	YES/NO
15	Non Disclosure Certificate	Applicable/Not Applicable	YES/NO
16	Bank Account Details for E-Payment	Applicable/Not Applicable	YES/NO
17	Capacity Evaluation of Bidder for current Tender	Applicable/Not Applicable	YES/NO
18	Tie Ups/Consortium Agreement are submitted as per format	Applicable/Not Applicable	YES/NO
19	Power of Attorney for Submission of Tender/Signing Contract Agreement	Applicable/Not Applicable	YES/NO
20	Analysis of Unit rates	Applicable/Not Applicable	YES/NO
21	Bankruptcy Code Proceedings (IBC) by NCLT or under Liquidation / BIFR (Undertaking to be enclosed if not applicable)	Applicable/Not Applicable	YES/NO

NOTE: STRIKE OFF 'YES' OR 'NO', AS APPLICABLE. TENDER NOT ACCOMPANIED BY THE PRESCRIBED ABOVE APPLICABLE DOCUMENTS ARE LIABLE TO BE SUMMARILY REJECTED.

DATE :

AUTHORISED SIGNATORY
(With Name, Designation and Company seal)

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE-5CONDITIONS TO BE COMPLIED WITH FOR CONSORTIUM BIDDING (TECHNICAL TIE UP)

- 1 Prime Bidder and Consortium Partner or partners are required to enter into a consortium agreement with a validity period of six months initially. In case the consortium is awarded the contract, then the Consortium Agreement between the Prime Bidder and Consortium Partner or partners shall be extended till contractual completion period including extension periods if any applicable. The Prime Bidder and Consortium Partner(s) shall certify to BHEL regarding existence and validity of their consortium agreement on six monthly basis.
- 2 Standalone' bidder cannot become a 'Prime Bidder' or a 'Consortium bidder' or 'Technical Tie up bidder' in a consortium (or Technical Tie up) bidding. Prime bidder shall neither be a consortium partner to other prime bidder nor take any other consortium partners. However, consortium partner may enter into consortium agreement with other prime bidders. In case of non compliance, consortium bids of such Prime bidders will be rejected.
- 3 Number of partners for a consortium Bidding (or Technical Tie up) shall be as specified in the PQR.
- 4 Prime Bidder shall be as specified in the Pre Qualification Requirement, else the bidder who has the major share of work.
- 5 In order to be qualified for the tender, Prime Bidder and Consortium partner or partners shall satisfy (i) the Technical 'Pre Qualifying Requirements' specified for the respective package, (ii) "Assessment of Capacity of Bidder" as specified in clause 8.0
- 6 Prime Bidder shall comply with additional 'Technical' criteria of PQR as defined in 'Explanatory Notes for the PQR'
- 7 Prime Bidder shall comply with all other Pre Qualifying criteria for the Tender unless otherwise specified
- 8 In case customer approval is required, then Prime Bidder and Consortium Partner or partners shall have to be individually approved by Customer for being considered for the tender.
- 9 Prime Bidder shall be responsible for the overall execution of the contract
- 10 In case of award of job, Performance shall be evaluated for Prime Bidder and Consortium Partner or partners for their respective scope of work(s) as per prescribed formats.
- 11 In case the Consortium partner or partners back out, their SDs shall be encashed by BHEL. In such a case, other consortium partner or partners meeting the PQR have to be engaged by the Prime Bidder, and if not, the respective work will be withdrawn and executed on risk and cost basis of the Prime Bidder. The new consortium partner or partners shall submit fresh SDs as applicable.
- 12 In case the prime Bidder withdraws, the whole contract shall be considered cancelled and short closed.
- 13 After successful execution of one work with a consortium partner under direct orders of BHEL, the Prime Bidder shall be eligible for becoming a 'standalone' bidder for works similar to that for which consortium partner was engaged, for subsequent tenders.
- 14 The consortium partner shall submit SD equivalent to 1% of the total contract value in addition to the SD to be submitted by the prime Bidder for the total contract value. In case there are two consortium partners, then each partner shall submit SD equivalent to 0.5% of the total contract value in addition to the SD to be submitted by the prime Bidder for the total contract value.
- 15 In case of a Technical Tie up, all the clauses applicable for the Consortium partner shall be applicable for the Technical Tie up partner also.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure - AAmendment to GCC/SCC

1. Introduction of Clause No 1.15.13 in GCC as below:

Clause No 1.15.13: Additional security deposit (SD) has to be submitted by the successful bidder with value as follows:

"If the final price of successful bidder is lesser by 'more than 20%' of BHEL's estimate - 'Additional Security Deposit' will be required to be submitted by the successful bidder with value as follows:

Additional Security Deposit = 30 % of (A-B) limited to a maximum of 10% of the 'Total Price/Contract Value', where,

A = 80% of BHEL estimate

B = The final offered price of successful bidder through RA (In case of RA)

OR

Sealed paper price bid of successful bidder (in case of paper bid)

This 'Additional Security Deposit' shall have the same validity as that of the 'Security Deposit' and shall be revalidated/released in the manner as spelt out for the 'Security Deposit' as per relevant clause of GCC.

The BHEL's estimated value shall be disclosed to the successful bidder (on their request) at appropriate juncture in case 'Additional Security Deposit' is applicable."

2. Clause no. 1.9.1(ii) of GCC shall be read as below:

The EMD may be accepted only in the following forms:

(a) Cash deposit as permissible under the extant Income Tax Act (before tender opening)

(b) Electronic Fund Transfer credited in BHEL account (before tender opening)

(c) Banker's cheque/ Pay order/ Demand draft, in favour of BHEL (along with offer)

(d) Fixed Deposit Receipt (FDR) issued by Scheduled Banks/ Public Financial Institutions as defined in the Companies Act (FDR should be in the name of the Contractor, a/c BHEL).

In addition to above, the EMD amount in excess of Rs. 2 Lakh may also be accepted in the form of Bank Guarantee from scheduled bank. The Bank Guarantee in such cases shall be valid for atleast six months. EMD of successful tenderer will be retained as part of Security Deposit.

Clause no. 1.9.1(iv) & (v) of GCC stands deleted.

3. Clause no. 1.10.1 of GCC shall be read as below:

The total amount of Security Deposit will be 5% of the contract value. EMD of the successful tenderer shall be converted and adjusted towards the required amount of Security Deposit.

4. Clause no. 1.10.2 of GCC shall be read as below:

At least 50% of the required Security Deposit, including the EMD, should be furnished before start of the work. Balance of the Security Deposit can be deposited by deducting 10% of the gross amount progressively from each of the running bills of the Contractor till the total amount of the required Security Deposit is collected.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

The recoveries made from running bills (cash deduction towards balance SD amount) can be released against submission of equivalent Bank Guarantee in acceptable form, but only once, before completion of work, with the approval of competent authorities.

5. Clause no. 1.10.3 of GCC shall be read as below:

The balance amount to make up the required Security Deposit of 5% of the contract value may be accepted in the following forms:

- a) Cash (as permissible under the extant Income Tax Act)
- b) Local cheques of Scheduled Banks (subject to realization)/ Pay Order/ Demand Draft/ Electronic Fund Transfer in favour of BHEL
- c) Bank Guarantee from Scheduled Banks/ Public Financial Institutions as defined in the Companies Act. The Bank Guarantee format should have the approval of BHEL
- d) Fixed Deposit Receipt issued by Scheduled Banks/ Public Financial Institutions as defined in the Companies Act (FDR should be in the name of the Contractor, a/c BHEL)
- e) Securities available from Indian Post offices such as National Savings Certificates, Kisan Vikas Patras etc. (held in the name of Contractor furnishing the security and duly endorsed/ hypothecated/ pledged, as applicable, in favour of BHEL)

(Note: BHEL will not be liable or responsible in any manner for the collection of interest or renewal of the documents or in any other matter connected therewith)

6. Introduction of Clause No. 1.10.8 in GCC as below:

Clause No 1.10.8: SDBG to be furnished by the vendor before start of work. No payment will be released till SDBG is submitted by the vendor.

If requested by the vendor, cash recovery equivalent to SDBG value to be made from bills submitted by the vendor.

Also recovery of interest calculated @SBI PLR +2% on amount equivalent to SDBG / PBG value to be made for the gap period (difference between date of start of work and date of submission of BG / cash recovery).

In case of delay in extension of SDBG, in case of validity expiry, SDBG shall be invoked. However if the vendor submits a new BG after invocation of the previous BG then, it shall be refunded and recovery for the gap period, i.e. the duration for which BG is not available shall be made as stated above.

7. Clause no. 1.11 of GCC shall be read as below:

Security Deposit shall be refunded/Bank Guarantee(s) released to the Contractor along with the 'Final Bill' after deducting all expenses / other amounts due to BHEL under the contract / other contracts entered into with them by BHEL upon fulfilment of contractual obligations as per terms of the contract.

8. Clause no. 2.8.3, 2.8.4 and 2.8.5 of GCC shall be read as below:

Clause no. 2.8.3: The contractor shall comply with all applicable State and Central Laws, Statutory Rules, Regulations, Notifications, etc. such as Payment of Wages Act, Minimum Wages Act, Workmen Compensation Act, Employer's Liability Act, Industrial Disputes Act, Employers Provident Act, Employees State Insurance Scheme, Contract Labour (Regulation and Abolition) Act, 1970, Payment of Bonus & Gratuity Act, Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996, The Building and Other Construction Workers' Welfare Cess Act, 1996 and other Acts, Rules, and Regulations for labour/workers as applicable and as may be enacted by the State Government and Central Govt. during the tenure of the Contract and having force or jurisdiction at Site. The Contractor shall also comply with provisions of and give all such notices to the local Governing Body, Police and other relevant Authorities as may be required by the Law.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Clause no. 2.8.4: The Contractor shall obtain independent License under the Contract Labour (Regulations and Abolition) Act, 1970 for engaging contract labour as required from the concerned Authorities based on the certificate (Form- V) issued by the Principal Employer/Customer.

Clause no. 2.8.5: The contractor shall pay and bear all taxes, fees, license charges, Cess, duties, deposits, tolls, royalties, commission or other charges which may be leviable on account of his operations in executing the contract.

9. Clause 2.12 of GCC (Overrun Compensation)

2.12 OVERRUN COMPENSATION (ORC)

2.12.1 ORC during original contract period: No ORC shall be applicable during the original contract period.

2.12.2 ORC during extended period for the reasons solely attributable to contractor: No ORC shall be applicable during the extended period granted for the reasons solely attributable to contractor and work executed during this period shall be paid as per original contract rates.

2.12.3 ORC during extended period for the reasons not attributable to contractor: ORC shall be payable as per following procedure:

2.12.3.1 For initial period of twelve months of extended period, ORC rate applicable over executed value shall be 5%. For every subsequent period of twelve months, ORC rate shall be further increased by 5% over the previous rate. For example, ORC rates applicable for initial period of 12 months and subsequent period of 12 months are given below.

Sl. No.	Extended Period for the reasons attributable to BHEL	ORC rate applicable over executed value
1	First 12 months	5%
2	13th-24th month and so on	10.25% $\{[(1.05 \times 1.05) - 1] \times 100\}$

This process of increasing ORC rate for each subsequent period of 12 months shall continue till applicability of ORC.

2.12.3.2 On completion of original contract period as well as on completion of each subsequent period of twelve months i.e. at the time of change in applicable ORC rate, Delay Analysis shall be carried out and percentage shortfall attributable to both BHEL & Contractor shall be calculated.

2.12.3.3 For the purpose of calculation of ORC, executed value of work in the month shall be divided in Part-1 and Part-2 in proportion of percentage shortfall attributable to BHEL and contractor respectively, based on the last delay analysis as worked out in 2.12.3.2.
ORC shall be payable only on Part-1 and no ORC shall be payable on Part-2.

Value of Part-1 shall be further limited to the value of actual inputs provided by BHEL i.e. "Plan - Shortfall attributable to BHEL" for the month, as per Form-14 for calculation of ORC.

2.12.3.4 Payment of ORC amount shall be further regulated as follows:

- (i) 50% of the ORC is allocated for deployment of matching resources (with weightages) agreed as per the joint programme drawn vide 2.11.4. ORC Payment against resources shall be calculated in proportion to percentage of resources actually deployed w.r.t. planned resources, as per Form-14.
- (ii) 50% of ORC is allocated for achieving of planned progress agreed as per the joint programme drawn vide 2.11.4. ORC Payment shall be reduced in proportion to percentage

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month, as per Form-14.

2.12.3.5 The maximum amount of ORC payable for the month shall be limited to Rs. 5,00,000/-.

2.12.3.6 In case, there is no shortfall attributable to contractor for the month and also contractor has deployed the resources as agreed in Form-14 but ORC amount payable for the month worked out as per procedure mentioned in clause 2.12.3.3, 2.12.3.4 and 2.12.3.5, is less than Rs.1,00,000/-, then ORC amount payable for the month shall be Rs.1,00,000/- otherwise ORC amount payable for the month shall remain same.

2.12.3.7 In case execution is on HOLD (Other than Force Majeure), ORC shall be payable as per following:

- i). Contractor has not been permitted by BHEL to de-mobilize
 - a) ORC amount of Rs. 1,00,000/- per month shall be applicable during the period of HOLD provided resources as planned are deployed (not demobilised) during the period of hold.
 - b) Subsequent to lifting of HOLD, Period of HOLD shall not be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.
- ii). Contractor has been permitted to demobilize and to remobilize after lifting of HOLD
 - a) No ORC shall be payable to contractor for the period of HOLD.
 - b) Subsequent to lifting of HOLD, Period of HOLD shall not be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.

2.12.3.8 In case Force Majeure is invoked:

- (i) No ORC shall be applicable during the period of Force Majeure.
- (ii) Subsequent to revocation of Force Majeure, period of Force Majeure shall be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.

2.12.4 Applicability of ORC: ORC shall not be applicable for following activities.

- (i) Area cleaning, removal of temporary structures and return of scrap.
- (ii) Punch list points / pending points liquidation pending due to reasons attributable to contractor
- (iii) Submission of "As built Drawing"
- (iv) Material Reconciliation
- (v) Completion of Contract Closure formalities like HR Clearance/ No dues from various dept./ Statutory Authorities etc.

2.12.5 Total Over Run Compensation shall be limited to 10% of the cumulatively executed contract value till the month (excluding Taxes and Duties if payable extra). For this purpose, executed contract value excludes PVC, ORC and Extra/Supplementary Works.

10. Clause 2.14 of GCC (Quantity Variation)

a) Existing Clause 2.14.1 of GCC stands revised as follows:

"The quantities given in the contract are tentative and may change to any extent (both in plus side and minus side). The quoted rates for individual items shall remain firm irrespective of any variations in the individual quantities No compensation becomes payable in case the variation of the final executed contract value is within the limit of Minus (-) 15% of awarded contract value"

b) Existing Clause 2.14.2 ii). of GCC stands revised as follows:

"In case the finally executed contract value increases above the awarded Contract Value due to quantity variation, there will be no upward revision in the rates for the individual items and also contractor is not eligible for any compensation."

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

11. Clause 2.17 of GCC (Price Variation Compensation) stands revised as follows:

2.17 PRICE VARIATION COMPENSATION

2.17.1 In order to take care of variation in cost of execution of work on either side, due to variation in the index of LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS, Price Variation Formula as described herein shall be applicable (only for works executed during extended period, if any, subject to other conditions as described in this section)

2.17.2 85% component of Contract Value shall be considered for PVC calculations and remaining 15% shall be treated as fixed component. The basis for calculation of price variation in each category, their component, Base Index shall be as under:

SL NO	CATEGORY	BASE INDEX	PERCENTAGE COMPONENT ('K')				
			CIVIL PACKAGES (See Note AB/C)			MECHANICAL PACKAGES	Electrical, C&I Material Management/Handling and other labour oriented packages
			A	B	C		
i)	LABOUR (ALL CATEGORIES)	'MONTHLY ALL-INDIA AVERAGE CONSUMER PRICE INDEX NUMBERS FOR INDUSTRIAL WORKERS' published by Labour Bureau, Ministry of Labour and Employment, Government of India. (Website: labourbureau.nic.in)	40	25	30	65	80
ii)	HIGH SPEED DIESEL OIL	Name of Commodity: HSD Commodity Code: 1202000005 (See Note E)	5	3	5	5	5
iii)	WELDING ROD	Name of Commodity: MANUFACTURE OF BASIC METALS Commodity Code: 1314000000 (See Note E)				15	
iv)	CEMENT	Name of Commodity: ORDINARY PORTLAND CEMENT Commodity Code: 1313050003 (See Note E)		20	30		
v)	STEEL (Structural and Reinforcement Steel)	Name of Commodity: MILD STEEL: LONG PRODUCTS Commodity Code: 1314040000 (See Note E)		25			
vi)	ALL OTHER MATERIALS (Other than Cement & Steel)	Name of Commodity: ALL COMMODITIES Commodity Code: 1000000000 (See Note E)	40	12	20		

Note: A) Cement & Steel: Free Issue (BHEL Scope)
 B) Cement & Steel : In Contractor Scope
 C) Cement in Contractor Scope, and Steel is Free Issue (BHEL Scope)
 D) For Composite packages (i.e. Civil+Mechanical+Electrical and/or CI or Civil+Mechanical or Mechanical+Electrical and/or CI), the COMPONENT ('K') for various categories shall be as per respective packages as above.
 E) As per the 'MONTHLY WHOLE SALE PRICE INDEX' for the respective Commodity and Type, published by Office of Economic Adviser, Ministry of Commerce and Industry, Government of India. (Website: <http://eaindustry.nic.in/home.asp>). Revisions in the index or commodity will be re adjusted accordingly.

2.17.3 #

2.17.4 Payment/recovery due to variation in index shall be determined on the basis of the following notional formula in respect of the identified COMPONENT ('K') viz LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS.

$$P = K \times R \times \frac{(X_N - X_o)}{X_o}$$

Where

P = Amount to be paid/recovered due to variation in the Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

K = Percentage COMPONENT ('K') applicable for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

R=Value of work done for the billing month (Excluding Taxes and Duties if payable extra)

X_N = Revised Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials for the billing month under consideration

X_o = Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials as on the Base date

2.17.5 Base date shall be the calendar month of the schedule completion date (i.e. Actual start date+ Scheduled Contractual completion period as per Letter of Intent/award and/or work order).

2.17.6 PVC shall not be payable for the ORC amount, Supplementary/Additional Items, Extra works.

However, PVC will be payable for items executed under quantity variation of BOQ items under originally awarded contract.

2.17.7 The contractor shall furnish necessary monthly bulletins in support of the requisite indices from the relevant websites along with his Bills.

2.17.8 The contractor will be required to raise the bills for price variation payments on a monthly basis along with the running bills irrespective of the fact whether any increase/decrease in the index for relevant categories has taken place or not. In case there is delay in publication of bulletins (final figure), the provisional values as published can be considered for payments and arrears shall be paid/recovered on getting the final values.

2.17.9 PVC shall be applicable only, during the extended period of contract (if any) after the scheduled completion period and for the portion of work delayed / backlog for the reasons not attributable to the Contractor.

However total quantum of Price Variation amount payable/recoverable shall be regulated as follows:

- i. For the portion of shortfall / backlog not attributable to contractor, PVC shall be worked out on the basis of indices applicable for the respective month in which work is done. Base index shall be applicable as defined in clause 2.17.5
- ii. In case of Force majeure, PVC shall be regulated as per (a) or (b) below:
 - a) Force majeure is invoked before "base date"/ "revised base date" (as explained below) OR immediately after "base date"/ "revised base date" in continuation (i.e. during the period when PVC is not applicable):
 1. Base date shall be revised: Revised base date =Previous base date+ duration of Force majeure.
No PVC will be applicable for the work done till revised base date.
 2. PVC will be applicable for the work done after "base date"/ "revised base date" as the case may be (during extended period when delay is not attributable to contractor). PVC shall be worked out on the basis of indices applicable for the respective month in which work is done with base index as on "base date"/"revised base date" as the case may be.
 - b) Force majeure is invoked after "base date"/ "revised base date" as the case may be (during extended period when delay is not attributable to contractor) -
 1. PVC shall be applicable for the work done after revocation of force majeure.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

2. PVC for the work done after revocation of force majeure shall be worked out on the basis of indices applicable for the respective month in which work is done excluding the effect of change in indices during total period of Force majeure(s) invoked after "base date"/ "revised base date" as the case may be. Base index shall be taken as on "base date"/ "revised base date" as the case may be.

- iii. The total amount of PVC shall not exceed 15% of the cumulatively executed contract value. Executed contract value for this purpose is exclusive of PVC, ORC, Supplementary/Additional Items and Extra works except extra items due to quantity variation.

12. Clause 2.2 of GCC (Law governing the contract and court jurisdiction) stands revised as follows:

"The contract shall be governed by the Law for the time being in force in the Republic of India. Subject to Clause 2.21.1 or 2.21.2 of this Contract, the Civil Court having original Civil Jurisdiction at Delhi for PSNR, at Kolkata for PSER, at Nagpur for PSWR and at Chennai for PSSR, shall alone have exclusive jurisdiction in regard to all matters in respect of the Contract."

13. Existing Clause 2.21 "ARBITRATION" of GCC has been amended as follows:

2.21 ARBITRATION & CONCILIATION

2.21.1 ARBITRATION:

2.21.1.1 Except as provided elsewhere in this Contract, in case Parties are unable to reach amicable settlement (whether by Conciliation to be conducted as provided in Clause 2.21.2 herein below or otherwise) in respect of any dispute or difference; arising out of the formation, breach, termination, validity or execution of the Contract; or, the respective rights and liabilities of the Parties; or, in relation to interpretation of any provision of the Contract; or, in any manner touching upon the Contract (hereinafter referred to as the 'Dispute'), then, either Party may, commence arbitration in respect of such Dispute by issuance of a notice in terms of section 21 of the Arbitration & Conciliation Act, 1996 (hereinafter referred to as the 'Notice'). The Notice shall contain the particulars of all claims to be referred to arbitration in sufficient detail and shall also indicate the monetary amount of such claim. The arbitration shall be conducted by a sole arbitrator to be appointed by the Head of the BHEL Power Sector Region issuing the Contract within 60 days of receipt of the complete Notice. The language of arbitration shall be English.

The Arbitrator shall pass a reasoned award.

Subject as aforesaid, the provisions of Arbitration and Conciliation Act 1996 (India) or statutory modifications or re-enactments thereof and the rules made thereunder as in force from time to time shall apply to the arbitration proceedings under this clause. The seat of arbitration shall be Kolkata (the place from where the contract is Issued). The Contract shall be governed by and be construed as per provisions of the laws of India. Subject to this provision 2.21.1.1 regarding ARBITRATION, the principal civil court exercising ordinary civil jurisdiction over the area where the seat of arbitration is located shall have exclusive jurisdiction over any DISPUTE to the exclusion of any other court.

2.21.1.2 In case of Contract with Public Sector Enterprise (PSE) or a Government Department, the following shall be applicable:

In the event of any dispute or difference relating to the interpretation and application of the provisions of commercial contract(s) between Central Public Sector Enterprises (CPSEs)/ Port Trusts inter se and also between CPSEs and Government Departments/Organizations (excluding disputes concerning Railways, Income Tax, Customs & Excise Departments), such dispute or difference shall be taken up by either party for resolution through AMRCD (Administrative Mechanism for Resolution of CPSEs Disputes) as mentioned in DPE OM No. 4(1)/2013-DPE(GM)/FTS-1835 dated 22-05-2018 as amended from time to time.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

2.21.1.3 The cost of arbitration shall initially be borne equally by the Parties subject to the final allocation thereof as per the award/order passed by the Arbitrator.

2.21.1.4 Notwithstanding the existence of any dispute or differences and/or reference for the arbitration, the Contractor shall proceed with and continue without hindrance the performance of its obligations under this Contract with due diligence and expedition in a professional manner unless the dispute inter-alia relates to cancellation, termination or short-closure of the Contract by BHEL.

2.21.2 CONCILIATION:

If at any time (whether before, during or after the arbitral or judicial proceedings), any Disputes (which term shall mean and include any dispute, difference, question or disagreement arising in connection with construction, meaning, operation, effect, interpretation or breach of the agreement, contract), which the Parties are unable to settle mutually, arise inter-se the Parties, the same may, be referred by either party to Conciliation to be conducted through Independent Experts Committee (IEC) to be appointed by competent authority of BHEL from the BHEL Panel of Conciliators.

Notes:

1. No serving or a retired employee of BHEL/Administrative Ministry of BHEL shall be included in the BHEL Panel of Conciliators.
2. Any other person(s) can be appointed as Conciliator(s) who is/are mutually agreeable to both the parties from outside the BHEL Panel of Conciliators.

The proceedings of Conciliation shall broadly be governed by Part-III of the Arbitration and Conciliation Act 1996 or any statutory modification thereof and as provided in Procedure 2.3 to this GCC. The Procedure 2.3 together with its Formats will be treated as if the same is part and parcel hereof and shall be as effectual as if set out herein in this GCC.

The Contractor hereby agrees that BHEL may make any amendments or modifications to the provisions stipulated in the Procedure 2.3 to this GCC from time to time and confirms that it shall be bound by such amended or modified provisions of the Procedure 2.3 with effect from the date as intimated by BHEL to it.

2.21.3 No Interest payable to Contractor

Notwithstanding anything to the contrary contained in any other document comprising in the Contract, no interest shall be payable by BHEL to Contractor on any moneys or balances including but not limited to the Security Deposit, EMD, Retention Money, RA Bills or the Final Bill, or any amount withheld and/or appropriated by BHEL etc., which becomes or as the case may be, is adjudged to be due from BHEL to Contractor whether under the Contract or otherwise.

14. Clause no. 2.7.2 and 2.7.3 of Volume-IB-GCC shall be revised as follows:

2.7.2.1 To terminate the contract or withdraw portion of work and get it done through other agency, at the risk and cost of the contractor after due notice of a period of 14 days' by BHEL in any of the following cases:

- i). Contractor's poor progress of the work vis-à-vis execution timeline as stipulated in the Contract, backlog attributable to contractor including unexecuted portion of work does not appear to be executable within balance available period considering its performance of execution.
- ii). Withdrawal from or abandonment of the work by contractor before completion of the work as per contract.
- iii). Non-completion of work by the Contractor within scheduled completion period as per Contract or as extended from time to time, for the reasons attributable to the contractor.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- iv). Termination of Contract on account of any other reason (s) attributable to Contractor.
- v). Assignment, transfer, subletting of Contract without BHEL's written permission.
- vi). Non-compliance to any contractual condition or any other default attributable to Contractor.

Risk & Cost Amount against Balance Work:

Risk & Cost amount against balance work shall be calculated as follows: Risk

$$\& \text{ Cost Amount} = [(A-B) + (A \times H/100)]$$

Where,

A= Value of Balance scope of Work (*) as per rates of new contract

B= Value of Balance scope of Work (*) as per rates of old contract being paid to the contractor at the time of termination of contract i.e. inclusive of PVC & ORC, if any.

H = Overhead Factor to be taken as 5

In case (A-B) is less than 0 (zero), value of (A-B) shall be taken as 0 (zero).

* Balance scope of work (in case of termination of contract):

Difference of Contract Quantities and Executed Quantities as on the date of issue of Letter for 'Termination of Contract', shall be taken as balance scope of Work for calculating risk & cost amount. Contract quantities are the quantities as per original contract. If, Contract has been amended, quantities as per amended Contract shall be considered as Contract Quantities.

Items for which total quantities to be executed have exceeded the Contract Quantities based on drawings issued to contractor from time to time till issue of Termination letter, then for these items total Quantities as per issued drawings would be deemed to be contract quantities.

Substitute/ extra items whose rates have already been approved would form part of contract quantities for this purpose. Substitute/ extra items which have been executed but rates have not been approved, would also form part of contract quantities for this purpose and rates of such items shall be determined in line with contractual provisions.

However, increase in quantities on account of additional scope in new tender shall not be considered for this purpose.

NOTE: Incase portion of work is being withdrawn at risk & cost of contractor instead of termination of contract, contract quantities pertaining to portion of work withdrawn shall be considered as 'Balance scope of work' for calculating Risk & Cost amount.

LD against delay in executed work in case of Termination of Contract:

LD against delay in executed work shall be calculated in line with LD clause no. 2.7.9 of GCC, for the delay attributable to contractor. For limiting the maximum value of LD, contract value shall be taken as Executed Value of work till termination of contract.

Method for calculation of "LD against delay in executed work in case of termination of contract" is given below.

- i). Let the time period from scheduled date of start of work till termination of contract excluding the period of Hold (if any) not attributable to contractor = T1
- ii) Let the value of executed work till the time of termination of contract= X
- iii) Let the Total Executable Value of work for which inputs/fronts were made available to contractor and were planned for execution till termination of contract = Y
- iv) Delay in executed work attributable to contractor i.e. $T2 = [1 - (X/Y)] \times T1$
- v) LD shall be calculated in line with LD clause (clause 2.7.9) of the Contract for the delay attributable to contractor taking "X" as Contract Value and "T2" as period of delay attributable to contractor.

2.7.2.2 In case Contractor fails to deploy the resources as per requirement, BHEL can deploy own/hired/otherwise arranged resources at the risk and cost of the contractor and recover the expenses incurred from the dues payable to contractor. Recoveries shall be actual expenses incurred plus 5% overheads or as defined in TCC.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

2.7.3 Recoveries arising out of Risk & Cost and LD or any other recoveries due from Contractor

Following sequence shall be applicable for recoveries from contractor:

- a) Dues available in the form of Bills payable to contractor, SD, BGs against the same contract.
- b) Demand notice for deposit of balance recovery amount shall be sent to contractor, if funds are insufficient to effect complete recovery against dues indicated in (a) above.
- c) If contractor fails to deposit the balance amount to be recovered within the period as prescribed in demand notice, following action shall be taken for balance recovery:
 - i) Dues payable to contractor against other contracts in the same Region shall be considered for recovery.
 - ii) If recovery cannot be made out of dues payable to the contractor as above, balance amount to be recovered, shall be informed to other Regions/Units for making recovery from the Unpaid Bills/Running Bills/SD/BGs/Final Bills of contractor.
 - iii) In-case recoveries are not possible with any of the above available options, Legal action shall be initiated for recovery against contractor.

15. Clause 2.24 of GCC (Performance Guarantee for Workmanship)

Term "Special Conditions of Contract" appearing in 3rd line of the current clause 2.24.1, is replaced by "Technical Conditions of Contract"

16. Clause 4.2.1.7 of Special Condition of Contract (SCC)

At the end of Clause 4.2.1.7 (i.e. after the line "Decision of BHEL shall be final and binding on the contractor") following para is to be added

"It is not obligatory on the part of BHEL to provide any tools and tackles or other materials other than those specifically agreed to do so by BHEL. However, depending upon the availability, BHEL /BHEL's Customer handling equipment and other plants may be made available to the contractor on payment of hire charges as fixed, subject to the conditions laid down by BHEL/Customer from time to time. Unless paid in advance, such hire charges, if applicable, shall be recovered from contractor's bill / security deposit or any other due payment in one installment."

17. Clause 9.61 of SCC (NON-COMPLIANCE)

Under NON-COMPLIANCE, at the end of Clause 9.61 (i.e. after the line "Also the amount will be spent for purchasing the safety appliances and supporting the safety activity at site.") following para is to be added:

"In case of any financial deduction made by Customer for lapses of safety other than what is provided above or elsewhere in the contract, the same shall be charged on back-to-back basis on the defaulting contractor without prejudice to any other right spelt anywhere in the tender / contract"

18. Clause 2.15 of GCC (EXTRA WORKS)

Existing Clause 2.15.5 of GCC stands revised as follows:

"After eligibility of extra works is established and finally accepted by BHEL engineer/designer, payment will be released on competent authority's approval at the following rate.

MAN-HOUR RATE FOR ELIGIBLE EXTRA WORKS: Single composite average labour man-hour rate, including overtime if any, supervision, use of tools and tackles and other site expenses and incidentals, consumables for carrying out any major rework/ repairs/ rectification/ modification/ fabrication as certified

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

by site as may arise during the course of erection, testing, commissioning or extra works arising out of transit, storage and erection damages, payment, if found due will be at Rs 108/- per man hour."

19. Clause 9.1 & 9.2 to 9.62 of SCC (HSE & OHSAS Obligations)

Cl. no. 9.0	No change
Cl. no. 9.1	HSE (Health, safety & Environment): Contractor will comply with HSE (Health, safety & Environment) requirements of BHEL as per "HSE Plan for Site Operations by Sub-contractors" (Document no. HSEP:14, Rev.00) attached with this tender.
Cl. no. 9.2 to 9.62	Deleted

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure -BTerms & Conditions of Reverse Auction

Against this enquiry for the subject item/ system with detailed scope of supply/service as per tender specifications, BHEL may resort to "REVERSE AUCTION PROCEDURE" i.e., ON LINE BIDDING (THROUGH A SERVICE PROVIDER). The philosophy followed for reverse auction shall be English Reverse (No ties).

1. For the proposed reverse auction, technically and commercially acceptable bidders only shall be eligible to participate.
2. Those bidders who have given their acceptance for Reverse Auction (quoted against this tender enquiry) will have to necessarily submit "online sealed bid" in the Reverse Auction. Non-submission of "online sealed bid" by the bidder for any of the eligible items for which techno- commercially qualified, will be considered as tampering of the tender process and will invite action by BHEL as per extant guidelines in vogue.
3. BHEL will engage the services of a service provider who will provide all necessary training and assistance before commencement of on line bidding on internet.
4. In case of reverse auction, BHEL will inform the bidders the details of Service Provider to enable them to contact & get trained for participation in the reverse auction.
5. Business rules like event date, time, bid decrement, extension etc. also will be communicated through service provider for compliance.
6. Bidders have to fax the Compliance form (annexure III) before start of Reverse auction. Without this, the bidder will not be eligible to participate in the event.
7. In line with the NIT terms, BHEL will provide the calculation sheet (e.g., EXCEL sheet) which will help to arrive at "Total Cost to BHEL" which is inclusive of all cost elements in line with terms & conditions of the tender for each of the bidder to enable them to fill-in the price and keep it ready for keying in during the Auction.
8. Reverse auction will be conducted on scheduled date & time.
9. At the end of Reverse Auction event, the lowest bidder value will be known on auction portal.
10. The lowest bidder has to fax/e-mail the duly signed and filled-in prescribed format for price breakup including that of line items, if required, (Annexure IV) as provided on case-to-case basis to Service provider within two working days of Auction without fail.
11. In case BHEL decides not to go for Reverse Auction procedure for this tender enquiry, the Price bids and price impacts, if any, already submitted and available with BHEL shall be opened as per BHEL's standard practice.
12. Bidders shall be required to read the "Terms and Conditions" section of the auctions site of Service provider, using the Login IDs and passwords given to them by the service provider before reverse auction event. Bidders should acquaint themselves of the "Business Rules of Reverse Auction", which will be communicated before the Reverse Auction.
13. If the Bidder or any of his representatives are found to be involved in Price manipulation/ cartel formation of any kind, directly or indirectly by communicating with other bidders, action as *per extant BHEL guidelines*, shall be initiated by BHEL and the results of the RA scrapped/ aborted.
14. The Bidder shall not divulge either his Bids or any other exclusive details of BHEL to any other party.
15. In case BHEL decides to go for reverse auction, the H1 bidder (whose quote is highest in online sealed bid) will not be allowed to participate in further RA process provided minimum three bidders are left after removal of H1 bidder. In case of tie for H1 bid (identical online sealed bids), 15 minutes' additional time shall be provided and all the participating bidders shall be informed by mail/message on bidding screen to enable bidders submit revised online sealed bids so as to break the tie.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure -C**Certificate by Chartered Accountant on letter head**

This is to to Certify that M/S
 (hereinafter referred to as 'company') having its registered office at
 is registered under MSMED Act 2006, (Entrepreneur
 Memorandum No (Part-II) dtd:.....,
 Category:..... (Micro/Small)). (Copy enclosed).

Further verified from the Books of Accounts that the investment of the company as per the latest audited financial year as per MSMED Act 2006 is as follows:

1. **For Manufacturing Enterprises:** Investment in plant and machinery (i.e. original cost excluding land and building and the items specified by the Ministry of Small Scale Industries vide its notification No.S.O.1722(E) dated October 5, 2006 :
Rs.....Lacs
2. **For Service Enterprises:** Investment in equipment (original cost excluding land and building and furniture, fittings and other items not directly related to the service rendered or as may be notified under the MSMED Act, 2006:
Rs.....Lacs

(Strike off whichever is not applicable)

The above investment of Rs.....Lacs is within permissible limit of Rs.....Lacs for Micro / Small (Strike off which is not applicable) Category under MSMED Act 2006.

Or

The company has been graduated from its original category {Micro/ Small} (Strike off which is not applicable) and the date of graduation of such enterprise from its original category is (dd/mm/yyyy) which is within the period of 3 years from the date of graduation of such enterprise from its original category as notified vide S.O. No. 3322(E) dated 01.11.2013 published in the gazette notification dated 04.11.2013 by Ministry of MSME.

Date:

(Signature)

Name-

Membership number-

Seal of Chartered Accountant

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure –D**Specific Clause w.r.t. BOCW Act & Cess Act**

1. It shall be the sole responsibility of the contractor as employer to ensure compliance of all the statutory obligations under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.
2. It shall be sole responsibility of the contractor engaging Building Workers in connection with the building or other construction works in the capacity of employer to apply and obtain registration certificate specifying the scope of work under the relevant provisions of the Building and Other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 from the appropriate Authorities.
3. It shall be responsibility of the contractor to furnish a copy of such Registration Certificate within a period of one month from the date of commencement of Work.
4. It is responsibility of the contractor to register under the Building and other Construction Workers' Welfare Cess Act, 1996 and deposit the required Cess for the purposes of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 at such rate as the Central Government may, by notification in the Official Gazette, from time to time specify. However, before registering and deposit of Cess under the Building and other Construction Workers' Welfare Cess Act, 1996, the contractor will seek written prior approval from the Construction Manager.
5. In case where the contractor has been accorded written approval by the Construction Manager and the contractor is required to furnish information in Form I and deposit the Cess under the Building and other Construction Workers' Welfare Cess Act, 1996, fails to do so, BHEL reserves right to impose penalty at the rate of 30% of Cess Amount.
6. It shall be sole responsibility of the contractor as employer to get registered every Building Worker, who is between the age of 18 to 60 years of age and who has been engaged in any building or other construction work for not less than ninety days during the preceding twelve months as Beneficiary under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996.
7. It shall be sole responsibility of the contractor as employer to maintain all the registers, records, notices and submit returns under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.
8. It shall be sole responsibility of the contractor as employer to provide notice of poisoning or occupation notifiable diseases, to report of accident and dangerous occurrences to the concerned authorities under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the rules made thereunder and to make payment of all statutory payments & compensation under the Employees' Compensation Act, 1923.
9. It shall be responsibility of the Contractor to furnish BHEL on monthly basis, Receipts/ Challans towards Deposit of the Cess under the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder along with following statistics :
 - (i) Number of Building Workers employed during preceding one month.
 - (ii) Number of Building workers registered as Beneficiary during preceding one month.
 - (iii) Disbursement of Wages made to the Building Workers for preceding wage month.
 - (iv) Remittance of Contribution of Beneficiaries made during the preceding month
10. BHEL shall reimburse the contractor the Cess amount deposited for the purposes of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 under the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder. However, BHEL shall not reimburse the Fee paid towards the registration of establishment, fees paid towards registration of Beneficiaries and Contribution of Beneficiaries remitted.
11. It shall be responsibility of the Building Worker engaged by the Contractor and registered as a beneficiary under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 to contribute to the Fund at such rate per mensem as may be specified by the State government

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

by notification in the Official Gazette. Where such beneficiary authorizes the contractor being his employer to deduct his contribution from his monthly wages and to remit the same, the contractor shall remit such contribution to the Building and other construction Workers' Welfare Board in such manner as may be directed by the Board, within the fifteen days from such deduction.

12. If any point of time during the contract period, non-compliance of the provisions of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder is observed, BHEL reserves the right to withhold a reasonable amount from the payables to discharge any obligations on behalf of Contractors. The reasonable amount shall be decided by the Construction Manager in consultation with Resident Accounts Officer & Head HR and shall be final.
13. The contractor shall declare to undertake any liability or claim arising out of employment of building workers and shall indemnify BHEL from all consequences / liabilities / penalties in case of non compliance of the provisions of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.

ANNEXURE-E**Statewise GST Registration nos.**

Sl. No.	State / UT	GST Reg. No.
1	Andhra Pradesh	37AAACB4146P7Z8
2	Assam	18AAACB4146P1ZE
3	Bihar	10AAACB4146P1ZU
4	Chandigarh	04AAACB4146P1ZN
5	Chattishgarh	22AAACB4146P1ZP
6	Daman & Diu	25AAACB4146P1ZJ
7	Delhi	07AAACB4146P1ZH
8	Gujarat	24AAACB4146P1ZL
9	Haryana	06AAACB4146P1ZJ
10	HP	02AAACB4146P1ZR
11	Jharkhand	20AAACB4146P5ZP
12	Karnataka	29AAACB4146P1ZB
13	Kerala	32AAACB4146P1ZO
14	Maharashtra	27AAACB4146P1ZF
15	MP	23AAACB4146P1ZN
16	Punjab	03AAACB4146P2ZO
17	Rajasthan	08AAACB4146P1ZF
18	Tamil Nadu	33AAACB4146P2ZL
19	Telangana	36AAACB4146P1ZG
20	Tripura	16AAACB4146P1ZI
21	UP	09AAACB4146P2ZC
22	Uttarakhand	05AAACB4146P1ZL
23	West Bangal	19AAACB4146P1ZC
24	Mizoram	15AAACB4146P1ZK
25	Orissa	21AAACB4146P1ZR
26	Arunachal Pradesh	12AAACB4146P1ZQ

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure- CPP-GST/II**Please arrange to submit this filled-up format along with Tender**

Name of the Company	
Address of Company*	
Company Registration Number*	
Name of Partners / Directors	
ALL THE STATES WHERE BIDDER HAS A PLACE OF BUSINESS*	
ALL ADDRESS OF VENDOR MENTIONING THEIR PIN AS PER THE LATEST GST REGISTRATION*	
GSTN OF ALL THE ABOVE NOTED PLACES OF VENDOR*	
Bidder Type: Indian/ Foreign*	
City*	
State*	
Country*	
Postal Code*	
PAN/TAN Number*	
Company's Establishment Year	
Company's Nature of Business*	
Company's Legal Status* {limited /undertaking/joint venture/partnership/other}	
Company Category* {micro unit as per MSME/small unit as per MSME/medium unit as per MSME/ UAN as per Udyog Aadhaar Memorandum/ Ancillary unit/project affected person of this company/ssi/ other}	
Relevant documents to be submitted as applicable.	
Enter Company's Contact Person Details	
Title(Mr. / Mrs. / Ms. / Dr. / Shri)*	
Contact Name*	
Date Of Birth*	
Correspondence Email*	
(Correspondence Email ID can be same as your Login ID. All the mail correspondence will be sent only to the Correspondence Email ID.)	
Designation	
Phone*	
Fax*	
Mobile*	

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

BHEL-IP

AA:SSP:IP:R02 dtd 10.07.2018

INTEGRITY PACT**Between**

Bharat Heavy Electricals Ltd. (BHEL), a company registered under the Companies Act 1956 and having its registered office at "BHEL House", Siri Fort, New Delhi - 110049 (India) hereinafter referred to as "The Principal", which expression unless repugnant to the context or meaning hereof shall include its successors or assigns of the ONE PART

and

_____, (description of the party along with address), hereinafter referred to as "The Bidder/ Contractor" which expression unless repugnant to the context or meaning hereof shall include its successors or assigns of the OTHER PART

Preamble

The Principal intends to award, under laid-down organizational procedures, contract/s for

_____. The Principal values full compliance with all relevant laws of the land, rules and regulations, and the principles of economic use of resources, and of fairness and transparency in its relations with its Bidder(s)/ Contractor(s).

In order to achieve these goals, the Principal will appoint Independent External Monitor(s), who will monitor the tender process and the execution of the contract for compliance with the principles mentioned above.

Section 1- Commitments of the Principal

1.1 The Principal commits itself to take all measures necessary to prevent corruption and to observe the following principles:-

1.1.1 No employee of the Principal, personally or through family members, will in connection with the tender for, or the execution of a contract, demand, take a promise for or accept, for self or third person, any material or immaterial benefit which the person is not legally entitled to.

1.1.2 The Principal will, during the tender process treat all Bidder(s) with equity and reason. The Principal will in particular, before and during the tender process, provide to all Bidder(s) the same information and will not provide to any Bidder(s) confidential/ additional information through which the Bidder(s) could obtain an advantage in relation to the tender process or the contract execution.

1.1.3 The Principal will exclude from the process all known prejudiced persons.

1.2 If the Principal obtains information on the conduct of any of its employees which is a penal offence under the Indian Penal Code 1860 and Prevention of Corruption Act 1988 or any other statutory penal enactment, or if there be a substantive suspicion in this regard, the Principal will inform its Vigilance Office and in addition can initiate disciplinary actions:

BHEL-IP

AA:SSP:IP:R02 dtd 10.07.2018

Section 2 - Commitments of the Bidder(s)/ Contractor(s)

- 2.1 The Bidder(s)/ Contractor(s) commit himself to take all measures necessary to prevent corruption. He commits himself to observe the following principles during his participation in the tender process and during the contract execution.
- 2.1.1 The Bidder(s)/ Contractor(s) will not, directly or through any other person or firm, offer, promise or give to the Principal or to any of the Principal's employees involved in the tender process or the execution of the contract or to any third person any material, immaterial or any other benefit which he/ she is not legally entitled to, in order to obtain in exchange any advantage of any kind whatsoever during the tender process or during the execution of the contract.
- 2.1.2 The Bidder(s)/ Contractor(s) will not enter with other Bidder(s) into any illegal or undisclosed agreement or understanding, whether formal or informal. This applies in particular to prices, specifications, certifications, subsidiary contracts, submission or non-submission of bids or any other actions to restrict competitiveness or to introduce cartelization in the bidding process.
- 2.1.3 The Bidder(s)/ Contractor(s) will not commit any penal offence under the relevant Indian Penal Code (IPC) and Prevention of Corruption Act; further the Bidder(s)/ Contractor(s) will not use improperly, for purposes of competition or personal gain, or pass on to others, any information or document provided by the Principal as part of the business relationship, regarding plans, technical proposals and business details, including information contained or transmitted electronically.
- 2.1.4 Foreign Bidder(s)/ Contractor(s) shall disclose the name and address of agents and representatives in India and Indian Bidder(s)/ Contractor(s) to disclose their foreign principals or associates. The Bidder(s)/ Contractor(s) will, when presenting his bid, disclose any and all payments he has made, and is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract.
- 2.2 The Bidder(s)/ Contractor(s) will not instigate third persons to commit offences outlined above or be an accessory to such offences.
- 2.3 The Bidder(s)/ Contractor(s) shall not approach the Courts while representing the matters to IEMs and will await their decision in the matter.

Section 3 - Disqualification from tender process and exclusion from future contracts

If the Bidder(s)/ Contractor(s), before award or during execution has committed a transgression through a violation of Section 2 above, or acts in any other manner such as to put his reliability or credibility in question, the Principal is entitled to disqualify the Bidder(s)/ Contractor(s) from the tender process or take action as per the separate "Guidelines on Banning of Business dealings with Suppliers/ Contractors", framed by the Principal.

Section 4 - Compensation for Damages

- 4.1 If the Principal has disqualified the Bidder from the tender process prior to the award according to Section 3, the Principal is entitled to demand and recover the damages equivalent Earnest Money Deposit/ Bid Security.
- 4.2 If the Principal has terminated the contract according to Section 3, or if the Principal is entitled to terminate the contract according to section 3, the Principal shall be entitled to

BHEL-IP

AA:SSP:IP:R02 dtd 10.07.2018

demand and recover from the Contractor liquidated damages equivalent to 5% of the contract value or the amount equivalent to Security Deposit/ Performance Bank Guarantee, whichever is higher.

Section 5 - Previous Transgression

- 5.1 The Bidder declares that no previous transgressions occurred in the last 3 years with any other company in any country conforming to the anti-corruption approach or with any other Public Sector Enterprise in India that could justify his exclusion from the tender process.
- 5.2 If the Bidder makes incorrect statement on this subject, he can be disqualified from the tender process or the contract, if already awarded, can be terminated for such reason.

Section 6 - Equal treatment of all Bidders/ Contractors / Sub-contractors

- 6.1 The Principal will enter into agreements with identical conditions as this one with all Bidders and Contractors. In case of sub-contracting, the Principal contractor shall be responsible for the adoption of IP by his sub-contractors and shall continue to remain responsible for any default by his sub-contractors.
- 6.2 The Principal will disqualify from the tender process all bidders who do not sign this pact or violate its provisions.

Section 7 - Criminal Charges against violating Bidders/ Contractors /Subcontractors

If the Principal obtains knowledge of conduct of a Bidder, Contractor or Subcontractor, or of an employee or a representative or an associate of a Bidder, Contractor or Subcontractor which constitutes corruption, or if the Principal has substantive suspicion in this regard, the Principal will inform the Vigilance Office.

Section 8 - Independent External Monitor(s)

- 8.1 The Principal appoints competent and credible Independent External Monitor for this Pact. The task of the Monitor is to review independently and objectively, whether and to what extent the parties comply with the obligations under this agreement.
- 8.2 The Monitor is not subject to instructions by the representatives of the parties and performs his functions neutrally and independently. He reports to the CMD, BHEL.
- 8.3 The Bidder(s)/ Contractor(s) accepts that the Monitor has the right to access without restriction to all contract documentation of the Principal including that provided by the Bidder(s)/ Contractor(s). The Bidder(s)/ Contractor(s) will grant the monitor, upon his request and demonstration of a valid interest, unrestricted and unconditional access to his contract documentation. The same is applicable to Sub-contractor(s). The Monitor is under contractual obligation to treat the information and documents of the Bidder(s)/ Contractor(s) / Sub-contractor(s) with confidentiality in line with Non- disclosure agreement.
- 8.4 The Principal will provide to the Monitor sufficient information about all meetings among the parties related to the contract provided such meetings could have an impact on the contractual relations between the Principal and the Contractor. The parties offer to the Monitor the option to participate in such meetings.

BHEL-IP

AA:SSP:IP:R02 dtd 10.07.2018

- 8.5 The role of IEMs is advisory, would not be legally binding and it is restricted to resolving issues raised by an intending bidder regarding any aspect of the tender which allegedly restricts competition or bias towards some bidders. At the same time, it must be understood that IEMs are not consultants to the Management. Their role is independent in nature and the advice once tendered would not be subject to review at the request of the organization.
- 8.6 For ensuring the desired transparency and objectivity in dealing with the complaints arising out of any tendering process, the matter should be examined by the full panel of IEMs jointly as far as possible, who would look into the records, conduct an investigation, and submit their joint recommendations to the Management.
- 8.7 The IEMs would examine all complaints received by them and give their recommendations/ views to CMD, BHEL, at the earliest. They may also send their report directly to the CVO and the Commission, in case of suspicion of serious irregularities requiring legal/ administrative action. IEMs will tender their advice on the complaints within 10 days as far as possible.
- 8.8 The CMD, BHEL shall decide the compensation to be paid to the Monitor and its terms and conditions.
- 8.9 IEM should examine the process integrity, they are not expected to concern themselves with fixing of responsibility of officers. Complaints alleging mala fide on the part of any officer of the organization should be looked into by the CVO of the concerned organisation.
- 8.10 If the Monitor has reported to the CMD, BHEL, a substantiated suspicion of an offence under relevant Indian Penal Code/ Prevention of Corruption Act, and the CMD, BHEL has not, within reasonable time, taken visible action to proceed against such offence or reported it to the Vigilance Office, the Monitor may also transmit this information directly to the Central Vigilance Commissioner, Government of India.
- 8.11 The number of Independent External Monitor(s) shall be decided by the CMD, BHEL.
- 8.12 The word 'Monitor' would include both singular and plural.

Section 9 - Pact Duration

- 9.1 This Pact shall be operative from the date IP is signed by both the parties till the final completion of contract for successful bidder and for all other bidders 6 months after the contract has been awarded. Issues like warranty / guarantee etc. should be outside the purview of IEMs.
- 9.2 If any claim is made/ lodged during currency of IP, the same shall be binding and continue to be valid despite the lapse of this pact as specified above, unless it is discharged/ determined by the CMD, BHEL.

Section 10 - Other Provisions

- 10.1 This agreement is subject to Indian Laws and jurisdiction shall be registered office of the Principal, i.e. New Delhi.

- 10.2 Changes and supplements as well as termination notices need to be made in writing. Side agreements have not been made.
- 10.3 If the Contractor is a partnership or a consortium, this agreement must be signed by all partners or consortium members.
- 10.4 Should one or several provisions of this agreement turn out to be invalid, the remainder of this agreement remains valid. In this case, the parties will strive to come to an agreement to their original intentions.
- 10.5 Only those bidders / contractors who have entered into this agreement with the Principal would be competent to participate in the bidding. In other words, entering into this agreement would be a preliminary qualification.

For & On behalf of the Principal

(Office Seal)

Place-----

Date-----

Witness:_____

(Name & Address) _____

For & On behalf of the Bidder/
Contractor

(Office Seal)

Witness:_____

(Name & Address) _____

TENDER NO: PSER:SCT:NKP-C1999:19

VOLUME -IB

GENERAL CONDITIONS OF CONTRACT
(SERVICE)

FOR

BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF
3X660 MW NORTH KARANPURA STPP, JHARKHAND.

BHARAT HEAVY ELECTRICALS LIMITED

(A GOVT. OF INDIA UNDERTAKING)

POWER SECTOR – EASTERN REGION

PLOT NO. – 9 / 1, DJ – BLOCK,

SECTOR – II, KARUNAMOYEE,

SALT LAKE CITY,

KOLKATA – 700091.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 1 OF 30

TABLE OF CONTENTS

1. Chapter-1 : General Instructions to Tenderers

- 1.1. Despatch Instructions
- 1.2. Submission of Tenders
- 1.3. Language
- 1.4. Price Discrepancy
- 1.5. Qualification of Tenderers
- 1.6. Evaluation of Bids
- 1.7. Data to be enclosed
- 1.8. Authorisation and Attestation
- 1.9. Earnest Money Deposit
- 1.10. Security Deposit
- 1.11. Return of Security Deposit
- 1.12. Bank Guarantee
- 1.13. Validity of offer
- 1.14. Execution of Contract Agreement
- 1.15. Rejection of Tender and other Conditions

2. Chapter-2

- 2.1. Definitions
- 2.2. Law Governing Contract and Court Jurisdiction
- 2.3. Issue of Notice
- 2.4. Use of land
- 2.5. Commencement of Work

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 2 OF 30

- 2.6. Measurement of Work and Mode of Payment
- 2.7. Rights of BHEL
- 2.8. Responsibilities of Contractor in respect of Local Laws, Employment of Workers etc
- 2.9. Progress Monitoring, Monthly Review and Performance Evaluation
- 2.10. Time of Completion
- 2.11. Extension of Time for Completion
- 2.12. Over Run Compensation
- 2.13. Interest Bearing Recoverable Advances
- 2.14. Quantity Variation
- 2.15. Extra Works
- 2.16. Supplementary Items
- 2.17. Price Variation Clause
- 2.18. Insurance
- 2.19. Strikes & Lockout
- 2.20. Force Majeure
- 2.21. Arbitration and Reconciliation
- 2.22. Retention Amount
- 2.23. Payments
- 2.24. Performance Guarantee for Workmanship
- 2.25. Closing of Contracts
- 2.26. Reverse Auction
- 2.27. Suspension of Business Dealings
- 2.28. Other Issues

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 3 OF 30

CHAPTER -1

1. GENERAL INSTRUCTION TO TENDERERS

1.1. DESPATCH INSTRUCTION

- i) The General Conditions of Contract form part of the Tender specifications. All pages of the tender documents shall be duly signed, stamped and submitted along with the offer in token of complete acceptance thereof. The information furnished shall be complete by itself. The tenderer is required to furnish all the details and other documents as required in the following pages
- ii) Tenderers are advised to study all the tender documents carefully. Any submission of tender by the tenderer shall be deemed to have been done after careful study and examination of the tender documents and with the full understanding of the implications thereof. Should the tenderers have any doubt about the meaning of any portion of the Tender Specification or find discrepancies or omissions in the drawings or the tender documents issued are incomplete or shall require clarification on any of the technical aspect, the scope of work etc., he shall at once, contact the authority inviting the tender well in time (so as not to affect last date of submission) for clarification before the submission of the tender. Tenderer's request for clarifications shall be with reference to Sections and Clause numbers given in the tender documents. The specifications and terms and conditions shall be deemed to have been accepted by the tenderer in his offer. Non compliance with any of the requirements and instructions of the tender enquiry may result in the rejection of the tender.
- iii) Integrity pact (IP) shall be applicable for all tenders / contracts if indicated in NIT. This integrity pact shall be issued as part of the Tender documents and shall be returned by the bidder along with Techno-commercial bid duly filled, signed and stamped by the authorized signatory who signs the bid. Only those vendors / bidders who have entered into such an IP with BHEL shall be considered qualified to participate in the bidding. Entering into this pact shall be a preliminary qualification.

1.2. SUBMISSION OF TENDERS

- 1.2.1 The tenderers must submit their tenders to Officer inviting tender as per instructions in the NIT
- 1.2.2 Tenders submitted by post shall be sent by 'REGISTERED POST ACKNOWLEDGEMENT DUE / by COURIER' and shall be posted with due allowance for any postal/courier delays. BHEL takes no responsibility for delay, loss or non-receipt of tenders sent by post/courier. The tenders received after the specified time of their submission are treated as 'Late Tenders' and shall not be considered under any circumstances. Offers received by Fax/Email/Internet shall be considered as per terms of NIT.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 4 OF 30

1.2.3 Tenders shall be opened by authorised Officer of BHEL at his office at the time and date as specified in the NIT, in the presence of such of those tenderers or their authorised representatives who may be present

1.2.4 Tenderers whose bids are found techno commercially qualified shall be informed the date and time of opening of the Price Bids and such Tenderers may depute their representatives to witness the opening of the price bids. BHEL's decision in this regard shall be final and binding.

1.2.5 Before submission of Offer, the tenderers are advised to inspect the site of work and the environments and be well acquainted with the actual working and other prevalent conditions, facilities available, position of material and labour, means of transport and access to Site, accommodation, etc. No claim will be entertained later on the grounds of lack of knowledge of any of these conditions.

1.3. LANGUAGE

1.3.1 The tenderer shall quote the rates in English language and international numerals. These rates shall be entered in figures as well as in words. For the purpose of the tenders, the metric system of units shall be used.

1.3.2 All entries in the tender shall either be typed or written legibly in ink. Erasing and over-writing is not permitted and may render such tenders liable for rejection. All cancellations and insertions shall be duly attested by the tenderer.

1.4 PRICE DISCREPANCY:

1.4.1 Conventional (Manual) Price Bid opening : In the case of price bid opening without resorting to Reverse Auction, if there are differences between the rates given by the tenderer in words and figures or in amount worked out by him, the following procedure for evaluation and award shall be followed:

- i) When there is a difference between the rates in figures and in words, the rates which corresponds to the amounts worked out by the contractor, shall be taken as correct
- ii) When the amount of an item is not worked out by the contractor or it does not correspond with the rate written either in figure or in words, then the rate quoted by the contractor in words shall be taken as correct
- iii) When the rate quoted by the contractor in figures and words tallies but the amount is not worked out correctly, the rate quoted by the contractor shall be taken as correct and not the amount.
- iv) In case of lumpsum price, if there is any difference between the amount in figures and in words, the amount quoted by the bidder in words shall be taken as correct.
- v) In case of omission in quoting any rate for one or more items, the evaluation shall be done considering the highest quoted rate obtained against the respective items by other tenderers for the subject tender. If the tenderer becomes L-1, the notional rates for the omission items shall be the lowest rates quoted for the respective items by the other tenderers against the respective omission items for the subject job and the 'Total quoted price (loaded for omissions)' shall be arrived at. However the overall price remaining the same as quoted originally, the rates for all the items in the 'Total quoted price (loaded for omissions)' shall be reduced item wise in proportion to the ratio of 'Original' total price and the 'Total quoted price (loaded for omissions)'.
- vi) The 'Final Total Amount' shall be arrived at after considering the amounts worked out in line with 'i' to 'iv' above.

1.4.2 Reverse Auction: In case of Reverse Auction, the successful bidder shall undertake to execute

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 5 OF 30

the work as per overall price offered by him during the Reverse Auction process. In case of omission of rates, the procedure shall be as per 'Guidelines for Reverse Auction' enclosed.

1.5. QUALIFICATION OF TENDERERS

- i) Only tenderers who have previous experience in the work of the nature and description detailed in the Notice Inviting Tender and/or tender specification are expected to quote for this work duly detailing their experience along with offer.
- ii) Offers from tenderers who do not have proven and established experience in the field shall not be considered
- iii) .Offers from tenderers who are under suspension (banned) by any Unit/Region/Division of BHEL shall not be considered.
- iv) Offers from tenderers who do not comply with the latest guidelines of Ministry/Commissions of Govt of India shall not be considered.

1.6. EVALUATION OF BIDS

- i) Technical Bids submitted by the tenderer will be opened first and evaluated for fulfilling the Pre Qualification criteria and other conditions in NIT/Tender documents, based on documentary evidences submitted along with the offer
- ii) In case the same qualifying experience is claimed by more than one agency, then the agency who has executed the work as per documentary evidence submitted shall only be qualified. Scope of qualifying work should be totally with the agency who has executed and in case it is only labour+consumables without T&P, then the responsibility of execution is assigned to the first agency and not to the agency who has executed only as labour supply contractor. Further, BHEL reserves the right to ask for further proofs including submission of TDS certificates for the said job
- iii) In case the qualifying experience is claimed by private organizations based on Work Order and completion certificates from another private organization, BHEL reserves the right to ask for further proofs including submission of TDS certificates for the said job
- iv) Assessing Bidder Capacity for executing the current tender shall be as per Notice Inviting Tender
- v) Price Bids of shortlisted bidders shall only be opened either through the conventional price bid opening or through electronic Reverse Auction, at the discretion of BHEL
- vi) Price Bids of unqualified bidders shall not be opened. Reasons for rejection shall be intimated in due course after issue of LOI/LOA to successful bidder and receipt of unqualified acceptance from the successful bidder
- vii) Bidders are advised to also refer to clause no 2.9.4 regarding evaluation of their performance in ongoing projects for the current tender

1.7. DATA TO BE ENCLOSED

Full information shall be given by the tenderer in respect of the following. Non-submission of this information may lead to rejection of the offer.

- i) **INCOME TAX PERMANENT ACCOUNT NUMBER**
Certified copies of Permanent Account Numbers as allotted by Income Tax Department for the Company/Firm/Individual Partners, etc. shall be furnished along with tender.
- ii) **ORGANIZATION CHART**
The organization chart of the tenderer's organization, including the names, addresses and contact

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 6 OF 30

information of the Directors/Partners shall be furnished along with the offer.

- iii) An attested copy of the Power of Attorney, in case the tender is signed by an individual other than the sole proprietor
- iv) IN CASE OF INDIVIDUAL TENDERER:
His / her full name, address and place & nature of business.
- v) IN CASE OF PARTNERSHIP FIRM
The names of all the partners and their addresses, A copy of the partnership deed/instrument of partnership duly certified by the Notary Public shall be enclosed.
- vi) IN CASE OF COMPANIES:
 - a. Date and place of registration including date of commencement certificate in case of Public Companies (certified copies of Memorandum and articles of Association are also to be furnished).
 - b. Nature of business carried on by the Company and the provisions of the Memorandum relating thereof.

1.8 AUTHORISATION AND ATTESTATION

Tenders shall be signed by a person duly authorized/empowered to do so. An attested copy of the Power of Attorney, in case the tender is signed by an individual other than the sole proprietor shall be submitted along with the tenders

1.9 EARNEST MONEY DEPOSIT

1.9.1 Every tender must be accompanied by the prescribed amount of Earnest Money Deposit (EMD) in the manner described herein.

- i) EMD shall be furnished along with the offer in full as per the amount indicated in the Special Conditions of Contract / NIT
- ii) EMD is to be paid in cash (as permissible under Income Tax Act), Pay order or Demand Draft in favour of 'Bharat Heavy Electricals Limited' and payable at Regional HQ issuing the tender.
- iii) No other form of EMD remittance shall be acceptable to BHEL
- iv) Bidder may opt to deposit "One Time EMD" of Rs. 2.0 lakhs (Rupees Two lakhs only) with BHEL:Power Sector Region HQ issuing the tender, which will enable them to participate in all the future tender enquiries in respect of Erection and Commissioning services issued from the respective office. Interested bidders may clearly send their consent for converting the present EMD into a "One Time EMD" in their offer.
 - Note : The 'One Time EMD' cannot be withdrawn by the tenderers within 3 years from the date of deposit, under any circumstances. The Tenderer who wishes to withdraw after three years will not be allowed to submit 'One Time EMD' again.
- v) Bidders who have already deposited such "One Time EMD" of Rs. 2.00 lakh are exempted from submission of EMD for this tender. However a copy of 'One Time EMD' certificate issued by BHEL Regional HQ issuing the tender shall be enclosed along with the offer.

1.9.2 EMD by the bidder will be forfeited as per Tender Documents if

- i) After opening the tender, the bidder revokes his tender within the validity period or increases his

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 7 OF 30

earlier quoted rates.

- ii) The bidder does not commence the work within the period as per LOI/Contract. In case the LOI / contract is silent in this regard then within 15 days after award of contract.

1.9.3 EMD shall not carry any interest.

1.9.4 In the case of unsuccessful bidders, the Earnest Money will be refunded to them within a reasonable time after acceptance of award by successful tenderer.

1.10 SECURITY DEPOSIT

1.10.1 Upon acceptance of Tender, the successful Tenderer should deposit the required amount of Security Deposit for satisfactory completion of work, as per the rates given below:

SN	Contract Value	Security Deposit Amount
1	Up to Rs. 10 lakhs	10% of Contract Value
2	Above Rs. 10 lakhs upto Rs.50 lakhs	1 lakh + 7.5% of the Contract Value exceeding Rs. 10 lakhs.
3	Above Rs. 50 lakhs	Rs 4 lakhs + 5% of the Contract Value exceeding Rs. 50 lakhs.

1.10.2 The security Deposit should be furnished before start of the work by the contractor.

1.10.3 Security Deposit may be furnished in any one of the following forms

- i) Cash (as permissible under the Income Tax Act)
- ii) Pay Order / Demand Draft in favour of BHEL.
- iii) Local cheques of scheduled banks, subject to realization.
- iv) Securities available from Post Offices such as National Savings Certificates, Kisan Vikas Patras etc. (Certificates should be held in the name of Contractor furnishing the security and duly pledged in favour of BHEL and discharged on the back).
- v) Bank Guarantee from Scheduled Banks / Public Financial Institutions as defined in the Companies Act. The Bank Guarantee format for Security Deposit shall be in the prescribed formats
- vi) Fixed Deposit Receipt issued by Scheduled Banks / Public Financial Institutions as defined in the Companies Act. The FDR should be in the name of the contractor, A/C BHEL, duly discharged on the back.
- vii) Security deposit can also be recovered at the rate of 10% from the running bills. However in such cases at least 50% of the Security Deposit should be deposited in any form as prescribed before start of the work and the balance 50% may be recovered from the running bills.
- viii) EMD of the successful bidder can be converted and adjusted against the cash portion of Security Deposit excepting for such bidders who have remitted One Time EMD.

NOTE: Acceptance of Security Deposit against Sl. No. (iv) and (vi) above will be subject to hypothecation or endorsement on the documents in favour of BHEL. However, BHEL will not be liable or responsible in any manner for the collection of interest or renewal of the documents or in any other matter connected therewith.

1.10.4 The Security Deposit shall not carry any interest.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 8 OF 30

1.10.5 In case the value of work exceeds / reduces from the awarded / accepted value, the Security Deposit shall be correspondingly enhanced / reduced as given below:

- i) The enhanced part of the Security Deposit shall be immediately deposited by the Contractor or adjusted against payments due to the Contractor.
- ii) There will be no reduction in Security Deposit value in case of variation in contract value upto the lower limit specified in Quantity variation clause. In case of reduction of contract value beyond the lower limit specified in Quantity Variation clause, then the Security Deposit shall be re adjusted in proportion.
- iii) In case of reduction, the reduced Contract value shall be certified by BHEL Construction Manager after ascertaining / freezing of BOQ / Drawings from the Design / Engineering Centre. The reduced Security Deposit value can only be considered after taking into account the adequacy of the securities held by BHEL to meet the liabilities of the contractor for the contract, and the performance of the contract in general. In such cases, the revised value of Security Deposit shall be worked out only after execution of not less than the lower limit of the revised scope of work/contract value as per quantity variation clause, and as certified by Construction Manager. This reduction in value of Security Deposit shall not entitle the contractor to any amendment of Contract and shall be operated at the discretion of BHEL
- iv) Contract value for the purpose of operating the reduced/increased value of Security Deposit due to Quantity Variation, shall be exclusive of Price Variation Clause, Over Run Compensation and Extra works done on manday rates.

1.10.6 The validity of Bank Guarantees towards Security Deposit shall be initially upto the completion period as stipulated in the Letter of Intent/Award + 3 months, and the same shall be kept valid by proper renewal till the acceptance of Final Bills of the Contractor, by BHEL

1.10.7 BHEL reserves the right of forfeiture of Security Deposit in addition to other claims and penalties in the event of the Contractor's failure to fulfill any of the contractual obligations or in the event of termination of contract as per terms and conditions of contract. BHEL reserves the right to set off the Security Deposit against any claims of other contracts with BHEL.

1.11 RETURN OF SECURITY DEPOSIT

Security Deposit shall be refunded/Bank Guarantee(s) released to the Contractor along with the 'Final Bill' after deducting all expenses / other amounts due to BHEL under the contract / other contracts entered into with them by BHEL.

1.12 BANK GUARANTEES

Where ever Bank Guarantees are to be furnished/submitted by the contractor, the following shall be complied with

- i) Bank Guarantees shall be from Scheduled Banks / Public Financial Institutions as defined in the Companies Act.
- ii) The Bank Guarantees shall be as per prescribed formats.
- iii) It is the responsibility of the bidder to get the Bank Guarantees revalidated/extended for the required period (subject to a minimum period of six months), as per the advice of BHEL Site Engineer / Construction Manager. BHEL shall not be liable for issue of any reminders regarding expiry of the

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 9 OF 30

Bank Guarantees.

- iv) In case extension/further extensions of any Bank Guarantees are not required, the bidders shall ensure that the same is explicitly endorsed by the Construction Manager and submitted to the Regional HQ issuing the LOI/LOA.
- v) In case the Bank Guarantees are not extended before the expiry date, BHEL reserves the right to invoke the same by informing the concerned Bank in writing, without any advance notice/communication to the concerned bidder.
- vi) Bidders to note that any corrections to Bank Guarantees shall be done by the issuing Bank, only through an amendment in an appropriate non judicial stamp paper.
- vii) The Original Bank Guarantee shall be sent directly by the Bank to BHEL under Registered Post (Acknowledgement Due), addressed to the Subcontracting Department of the respective Region.

1.13 VALIDITY OF OFFER

The rates in the Tender shall be kept open for acceptance for a minimum period of SIX MONTHS from latest due date of offer submission (including extension, if any) . In case BHEL (Bharat Heavy Electricals Ltd) calls for negotiations, such negotiations shall not amount to cancellation or withdrawal of the original offer which shall be binding on the tenderers.

1.14 EXECUTION OF CONTRACT AGREEMENT

The successful tenderer's responsibility under this contract commences from the date of issue of the Letter of Intent by Bharat Heavy Electricals Limited. The Tenderer shall submit an unqualified acceptance to the Letter of Intent/Award within the period stipulated therein.

The successful tenderer shall be required to execute an agreement in the prescribed form, with BHEL, within a reasonable time after the acceptance of the Letter of Intent/Award, and in any case before releasing the first running bill. The contract agreement shall be signed by a person duly authorized/empowered by the tenderer. The expenses for preparation of agreement document shall be borne by BHEL

1.15 REJECTION OF TENDER AND OTHER CONDITIONS

1.15.1 The acceptance of tender will rest with BHEL which does not bind itself to accept the lowest tender or any tender and reserves to itself full rights for the following without assigning any reasons whatsoever:-

- a. To reject any or all of the tenders.
- b. To split up the work amongst two or more tenderers as per NIT
- c. To award the work in part if specified in NIT
- d. In case of either of the contingencies stated in (b) and (c) above, the time for completion as stipulated in the tender shall be applicable.

1.15.2 Conditional tenders, unsolicited tenders, tenders which are incomplete or not in the form specified or defective or have been materially altered or not in accordance with the tender

Bharat Heavy Electricals Limited		
Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 10 OF 30

conditions, specifications etc., are liable to be rejected.

- 1.15.3 Tenders are liable to be rejected in case of unsatisfactory performance of the tenderer with BHEL, or tenderer under suspension (hold/banning /delisted) by any unit / region / division of BHEL or tenderers who do not comply with the latest guidelines of Ministry/Commissions of Govt of India. BHEL reserves the right to reject a bidder in case it is observed that they are overloaded and may not be in a position to execute this job as per the required schedule in line with clause no. 9.0 of the 'NIT'. The decision of BHEL will be final in this regard.
- 1.15.4 If a tenderer who is a proprietor expires after the submission of his tender or after the acceptance of his tender, BHEL may at their discretion, cancel such tender. If a partner of a firm expires after the submission of tender or after the acceptance of the tender, BHEL may then cancel such tender at their discretion, unless the firm retains its character.
- 1.15.5 BHEL will not be bound by any Power of Attorney granted by changes in the composition of the firm made subsequent to the execution of the contract. They may, however, recognise such power of Attorney and changes after obtaining proper legal advice, the cost of which will be chargeable to the contractor concerned.
- 1.15.6 If the tenderer deliberately gives wrong information in his tender, BHEL reserves the right to reject such tender at any stage or to cancel the contract if awarded and forfeit the Earnest Money/Security Deposit/any other money due.
- 1.15.7 Canvassing in any form in connection with the tenders submitted by the Tenderer shall make his offer liable to rejection.
- 1.15.8 In case the Proprietor, Partner or Director of the Company/Firm submitting the Tender, has any relative or relation employed in BHEL, the authority inviting the Tender shall be informed of the fact as per specified format, along with the Offer. Failing to do so, BHEL may, at its sole discretion, reject the tender or cancel the contract and forfeit the Earnest Money/Security Deposit.
- 1.15.9 The successful tenderer should not sub-contract part or complete work detailed in the tender specification undertaken by him without written permission of BHEL's Construction Manager/Site Incharge. The tenderer is solely responsible to BHEL for the work awarded to him.
- 1.15.10 The Tender submitted by a techno commercially qualified tenderer shall become the property of BHEL who shall be under no obligation to return the same to the bidder. However unopened price bids and late tenders shall be returned to the bidders
- 1.15.11 Unsolicited discount received after the due date and time of Bid Submission shall not be considered for evaluation. However, if the party who has submitted the unsolicited discount/rebate becomes the L-I party, then the awarded price i.e contract value shall be worked out after considering the discount so offered.
- 1.15.12 BHEL shall not be liable for any expenses incurred by the bidder in the preparation of the tender irrespective of whether the tender is accepted or not.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 11 OF 30

CHAPTER-2

2.1 **DEFINITION:** The following terms shall have the meaning hereby assigned to them except where the context otherwise requires

i)	BHEL shall mean Bharat Heavy Electricals Limited (of the respective Power Sector Region inviting the Tender), a company registered under Indian Companies Act 1956, with its Registered Office at BHEL HOUSE, SIRI FORT, NEW DELHI – 110 049, or its Power Sector Regional Offices or its Authorised Officers or its Site Engineers or other employees authorised to deal with any matters with which these persons are concerned on its behalf.
ii)	“EXECUTIVE DIRECTOR” or ‘GROUP GENERAL MANAGER’ or “GENERAL MANAGER (Incharge)” or “GENERAL MANAGER” shall mean the Officer in Administrative charge of the respective Power Sector Region.
iii)	“COMPETENT AUTHORITY” shall mean Executive Director or Group General Manager or General Manager (Incharge) or General Manager or BHEL Officers who are empowered to act on behalf of the Executive Director or General Manager (Incharge) or General Manager of BHEL.
iv)	“ENGINEER” or “ENGINEER IN CHARGE” shall mean an Officer of BHEL as may be duly appointed and authorized by BHEL to act as “Engineer” on his behalf for the purpose of the Contract, to perform the duty set forth in this General Conditions of Contract and other Contract documents. The term also includes ‘CONSTRUCTION MANAGER’ or ‘SITE INCHARGE’ as well as Officers at Site or at the Headquarters of the respective Power Sector Regions.
v)	“SITE” shall mean the places or place at which the plants/equipments are to be erected and services are to be performed as per the specification of this Tender.
vi)	“CLIENT OF BHEL” or “CUSTOMER” shall mean the project authorities with whom BHEL has entered into a contract for supply of equipments or provision of services.
vii)	“CONTRACTOR” shall mean the successful Bidder/Tenderer who is awarded the Contract and shall include the Contractor’s successors, heirs, executors, administrators and permitted assigns.
viii)	“CONTRACT” or “CONTRACT DOCUMENT” shall mean and include the Agreement of Work Order, the accepted appendices of Rates, Schedules, Quantities if any, General Conditions of Contract, Special Conditions of Contract, Instructions to the Tenderers, Drawings, Technical Specifications, the Special Specifications if any, the Tender documents, subsequent amendments mutually agreed upon and the Letter of Intent/Acceptance issued by BHEL. Any conditions or terms stipulated by the contractor in the tender documents or subsequent letters shall not form part of the contract unless, specifically accepted in writing by BHEL in the Letter of Intent/Award and incorporated in the agreement.
ix)	“GENERAL CONDITIONS OF CONTRACT” shall mean the ‘Instructions to Tenderers’ and ‘General Conditions of Contract’ pertaining to the work for which above tenders have been called for.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 12 OF 30

x)	“TENDER SPECIFICATION” or “TENDER” or “TENDER DOCUMENTS” shall mean General Conditions, Common Conditions, Special Conditions, Price Bid, Rate Schedule, Technical Specifications, Appendices, Annexures, Corrigendums, Amendments, Forms, procedures, Site information, etc and drawings/documents pertaining to the work for which the tenderers are required to submit their offers. Individual specification number will be assigned to each Tender Specification.
xi)	“LETTER OF INTENT” shall mean the intimation by a Letter/Fax/email to the tenderer that the tender has been accepted in accordance with provisions contained in the letter. The responsibility of the contractor commences from the date of issue of this letter and all terms and conditions of the contract are applicable from this date.
xii)	“COMPLETION TIME” shall mean the period by ‘date/month’ specified in the ‘Letter of Intent/Award’ or date mutually agreed upon for handing over of the intended scope of work, the erected equipment/plant which are found acceptable by the Engineer, being of required standard and conforming to the specifications of the Contract.
xiii)	“PLANT” shall mean and connote the entire assembly of the plant and equipments covered by the contract.
xiv)	“EQUIPMENT” shall mean equipment, machineries, materials, structural, electricals and other components of the plant covered by the contract.
xv)	“TESTS” shall mean and include such test or tests to be carried out on the part of the contractor as are prescribed in the contract or considered necessary by BHEL, in order to ascertain the quality, workmanship, performance and efficiency of the contractor or part thereof.
xvi)	“APPROVED”, “DIRECTED” or “INSTRUCTED” shall mean approved, directed or instructed by BHEL.
xvii)	“WORK or CONTRACT WORK” shall mean and include supply of all categories of labour, specified consumables, tools and tackles and Plants required for complete and satisfactory site transportation, handling, stacking, storing, erecting, testing and commissioning of the equipments to the entire satisfaction of BHEL.
xviii)	“SINGULAR AND PLURALS ETC” words carrying singular number shall also include plural and vice versa, where the context so requires. Words imparting the masculine Gender shall be taken to include the feminine Gender and words imparting persons shall include any Company or Associations or Body of Individuals, whether incorporated or not.
xix)	“HEADING” – The heading in these General Conditions are solely for the purpose of facilitating reference and shall not be deemed to be part thereof or be taken as instructions thereof or of the contract.
xx)	“MONTH” shall mean calendar month unless otherwise specified in the Tender.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 13 OF 30

xxi)	Day' or 'Days' unless herein otherwise expressly defined shall mean calendar day or days of twenty four (24) hours each. A week shall mean continuous period of seven (7) days.
xxii)	"COMMISSIONING" shall mean the synchronisation testing and achieving functional operation of the Equipment with associated system after all initial adjustments, trials, cleaning, re-assembly required at site if any, have been completed and Equipment with associated system is ready for taking into service.
xxiii)	"WRITING" shall include any manuscript type written or hand written or printed statement or electronically transmitted messages, under the signature or seal or transmittal of BHEL.
xxiv)	"TEMPORARY WORK" shall mean all temporary works for every kind required in or for the execution, completion, maintenance of the work.
xxv)	'CONTRACT PRICE' or 'CONTRACT VALUE' shall mean the sum mentioned in the LOI/LOA/Contract Agreement subject to such additions thereto or deductions there from as may be made under provisions hereinafter contained
xxvi)	"COMMENCEMENT DATE" or "START DATE" shall mean the commencement/start of work at Site as per terms defined in the Tenderl
xxvii)	"SHORT CLOSING" or "FORE CLOSING" of Contract shall mean the premature closing of Contract, for reasons not attributable to the contractor and mutually agreed between BHEL and the contractor
xxviii)	"TERMINATION" of Contract shall mean the pre mature closing of contract due to reasons as mentioned in the contract
xxix)	"DE MOBILISATION" shall mean the temporary winding up of Site establishment by Contractor leading to suspension of works temporarily for reasons not attributable to the contractor
xxx)	"RE MOBILISATION" shall mean the resumption of work with all resources required for the work after demobilization.
2.2	LAW GOVERNING THE CONTRACT AND COURT JURISDICTION The contract shall be governed by the Law for the time being in force in the Republic of India. The Civil Court having original Civil Jurisdiction at Delhi for PSNR, at Kolkata for PSER, at Nagpur for PSWR and at Chennai for PSSR, shall alone have exclusive jurisdiction in regard to all claims in respect of the Contract. No other Civil Court shall have jurisdiction in case of any dispute, under this contract
2.3	ISSUE OF NOTICE 2.3.1 <u>Service of notice on contractor</u> Any notice to be given to the Contractor under the terms of the contract shall be served by sending the same by Registered Post / Speed Post to or leaving the same at the Contractor's last known address of the principal place of business (or in the event of the contractor being a company, to or at its Registered Office). In case of change of address, the notice shall be served at changed address as notified in writing by the Contractor to BHEL. Such posting or leaving of the notice shall be deemed to be good service of such notice and the time mentioned to the condition for doing any act after notice shall be reckoned from the date so mentioned in such notice.
2.3.2	<u>Service of notice on BHEL</u>

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 14 OF 30

Any notice to be given to BHEL in-charge/Region under the terms of the Contract shall be served by sending the same by post to or leaving the same at BHEL address or changed address as notified in writing by BHEL to the Contractor.	
2.4	USE OF LAND No land belonging to BHEL or their Customer under temporary possession of BHEL shall be occupied by the contractor without written permission of BHEL.
2.5	COMMENCEMENT OF WORK
2.5.1	The contractor shall commence the work as per the time indicated in the Letter of Intent from BHEL and shall proceed with the same with due expedition without delay.
2.5.2	If the contractor fails to start the work within stipulated time as per LOI or as intimated by BHEL, then BHEL at its sole discretion will have the right to cancel the contract. The Earnest Money and/or Security Deposit with BHEL will stand forfeited without any further reference to him without prejudice to any and all of BHEL's other rights and remedies in this regard.
2.5.3	All the work shall be carried out under the direction and to the satisfaction of BHEL.
2.6	MEASUREMENT OF WORK AND MODE OF PAYMENT:
2.6.1	All payments due to the contractors shall be made by e mode only, unless otherwise found operationally difficult for reasons to be recorded in writing
2.6.2	For progress running bill payments: - The Contractor shall present detailed measurement sheets in triplicate, duly indicating all relevant details based on technical documents and connected drawings for work done during the month/period under various categories in line with terms of payment as per contract. The basis of arriving at the quantities, weights shall be relevant documents and drawings released by BHEL. These measurement sheets shall be prepared jointly with BHEL Engineers and signed by both the parties.
2.6.3	These measurement sheets will be checked by BHEL Engineer and quantities and percentage eligible for payment under various groups shall be decided by BHEL Engineer. The abstract of quantities and percentage so arrived at based on the terms of payment shall be entered in Measurement Book and signed by both the parties.
2.6.4	Based on the above quantities, contractor shall prepare the bills in prescribed format and work out the financial value. These will be entered in Measurement Book and signed by both the parties. Payment shall be made by BHEL after effecting the recoveries due from the contractor.
2.6.5	All recoveries due from the contractor for the month/period shall be effected in full from the corresponding running bills unless specific approval from the competent authorities is obtained to the contrary.
2.6.6	Measurement shall be restricted to that portion of work for which it is required to ascertain the financial liability of BHEL under this contract.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 15 OF 30

- 2.6.7 The measurement shall be taken jointly by persons duly authorized on the part of BHEL and by the Contractor.
- 2.6.8 The Contractor shall bear the expenditure involved if any, in making the measurements and testing of materials to be used/used in the work. The contractor shall, without extra charges, provide all the assistance with appliances and other things necessary for measurement.
- 2.6.9 If at any time due to any reason whatsoever, it becomes necessary to re-measure the work done in full or in part, the expenses towards such re measurements shall be borne by the contractor unless such re measurements are warranted solely for reasons not attributable to contractor.
- 2.6.10 Passing of bills covered by such measurements does not amount to acceptance of the completion of the work measured. Any left out work has to be completed, if pointed out at a later date by BHEL.
- 2.6.11 Final measurement bill shall be prepared in the final bill format prescribed for the purpose based on the certificate issued by BHEL Engineer that entire works as stipulated in tender specification has been completed in all respects to the entire satisfaction of BHEL. Contractor shall give unqualified "No Claim" Certificate. All the tools and tackles loaned to him should be returned in satisfactory condition to BHEL. The abstract of final quantities and financial values shall also be entered in the Measurement Books and signed by both parties to the contract. The Final Bill shall be prepared and paid within a reasonable time after completion of work.
- 2.7 **RIGHTS OF BHEL**
BHEL reserves the following rights in respect of this contract during the original contract period or its extensions if any, as per the provisions of the contract, without entitling the contractor for any compensation.
- 2.7.1 To withdraw any portion of work and/or to restrict/alter quantum of work as indicated in the contract during the progress of work and get it done through other agencies to suit BHEL's commitment to its customer or in case BHEL decides to advance the date of completion due to other emergent reasons/ BHEL's obligation to its customer.
- 2.7.2 To terminate the contract or get any part of the work done through other agency or deploy BHEL's own/hired/otherwise arranged resources , at the risk and cost of the contractor after due notice of a period of two weeks by BHEL, in the event of:-
- i) Contractor's continued poor progress
 - ii) Withdrawal from or abandonment of the work before completion of the work
 - iii) Contractor's inability to progress the work for completion as stipulated in the contract
 - iv) Poor quality of work
 - v) Corrupt act of Contractor
 - vi) Insolvency of the Contractor
 - vii) Persistent disregard to the instructions of BHEL
 - viii) Assignment, transfer, sub-letting of contract without BHEL's written permission
 - ix) Non fulfillment of any contractual obligations
 - x) In the opinion of BHEL, the contractor is overloaded and is not in a position to execute the job as per required schedule

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 16 OF 30

- 2.7.3 To meet the expenses including BHEL overheads on the differential cost at 5%, over and above the Liquidated damages/penalties arising out of "Risk & Cost" as explained above under Sl.No. 2.7.2. BHEL shall recover the amount from any money due from Contractor, or from any money due to the Contractor including Security Deposit, or by forfeiting any T&P or material of the contractor under this contract or any other contract of BHEL or by any other means or any combination thereof
- 2.7.4 To terminate the contract or to restrict the quantum of work and pay for the portion of work executed in case BHEL's contract with their customer are terminated for any reason, as per mutual agreement.
- 2.7.5 To effect recovery from any amounts due to the contractor under this or any other contract or in any other form, the moneys BHEL is statutorily forced to pay to anybody, due to contractor's failure to fulfill any of his obligations. BHEL shall levy overheads of 5% on all such payments along with interest as defined elsewhere in the GCC.
- 2.7.6 While every endeavour will be made by BHEL to this end, they cannot guarantee uninterrupted work due to conditions beyond their control. The Contractor will not be normally entitled for any compensation/extra payment on this account unless otherwise specified elsewhere in the contract.
- 2.7.7 In case the execution of works comes to a complete halt or reaches a stage wherein worthwhile works cannot be executed and there is no possibility of commencement of work for a period of not less than two months, due to reasons not attributable to the contractor and other than Force Majeure conditions, BHEL may consider permitting the contractor to de mobilize forthwith and re mobilize at an agreed future date. Cost of such demobilization/remobilization shall be mutually agreed. ORC in such cases shall not be applicable for the period between the period of demobilization and re mobilisation. The duration of contract/time extension shall accordingly get modified suitably. In case of any conflict, BHEL decision in this regard shall be final and binding on the contractor.
- 2.7.8 In the unforeseen event of inordinate delay in receipt of materials, drawings, fronts, etc, due to which inordinate discontinuity of work is anticipated, BHEL at its discretion may consider contractor's request to short close the contract in following cases:
- a) The balance works (including but not limited to Trial Operation, PG Test, etc) are minor vis a vis the scope of work envisaged as per the contract.
 - b) There has been no significant work in past 6 months OR no significant work is expected in next 6 months (example in Hydro projects or in projects where work has stopped due to reasons beyond the control of BHEL)
 - c) The balance works cannot be done within a reasonable period of time as they are dependent on unit shutdown or on other facilities of customer or any other reasons not attributable to the contractor

At the point of requesting for short closure, contractor shall establish that he has completed all works possible of completion and he is not able to proceed with the balance works due to constraints beyond his control. In such a case, the estimated value of the unexecuted portion of work (or estimated value of services to be provided for carrying out milestone/stage payments like

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 17 OF 30

	Trial Operation/PG Test, etc) as mutually agreed, shall however be reduced from the final contract value. 2.7.9 LIQUIDATED DAMAGES/PENALTY If the contractor fails to maintain the required progress of work which results in delay in the completion of the work as per the contractual completion period, BHEL shall have the right to impose Liquidated Damage/Penalty at the rate of 0. 5% of the contract value, per week of delay or part thereof subject to a maximum of 10% of the contract value. For this purpose, the period of delay shall be the delay attributable to the Contractor for the completion of work as per contract. Contract Value for this purpose, shall be the final executed value exclusive of ORC, Extra Works executed on Manday rate basis, Supplementary/Additional Items and PVC.
2.8	RESPONSIBILITIES OF THE CONTRACTOR IN RESPECT OF LOCAL LAWS, EMPLOYMENT OF WORKERS ETC. The following are the responsibilities of the contractor in respect of observance of local laws, employment of personnel, payment of taxes etc. The subcontractor shall fully indemnify BHEL against any claims of whatsoever nature arising due to the failure of the contractor in discharging any of his responsibilities hereunder: 2.8.1 As far as possible, Unskilled Workers shall be engaged from the local areas in which the work is being executed. 2.8.2 The contractor at all times during the continuance of this contract shall, in all his dealings with local labour for the time being employed on or in connection with the work, have due regard to all local festivals and religious and other customs. 2.8.3 The contractor shall comply with all applicable State and Central Laws, Statutory Rules, Regulations etc. such as Payment of Wages Act, Minimum Wages Act, Workmen Compensation Act, Employer's Liability Act, Industrial Disputes Act, Employers Provident Act, Employees State Insurance Scheme, Contract Labour (Regulation and Abolition) Act 1970, Payment of Bonus & Gratuity Act and other Acts, Rules and Regulations for labour as may be enacted by the Government during the tenure of the Contract and having force or jurisdiction at Site. The Contractor shall also give to the local Governing Body, Police and other relevant Authorities all such notices as may be required by the Law. 2.8.4 The contractor shall obtain independent License under the Contract Labour (Regulations and Abolition Act, 1970)as required from the concerned Authorities based on the certificate (Form-V) issued by the Principal Employer/Customer 2.8.5 The contractor shall pay all taxes, fees, license charges, deposits, duties, tolls, royalties, commission or other charges which may be leviable on account of his operations in executing the contract. 2.8.6 While BHEL would pay the inspection fees and Registration fees of Boiler/Electrical Inspectorate,

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 18 OF 30

	all other arrangements for site visits periodically by the Inspectorate to site, Inspection certificate etc. will have to be made by contractor. However, BHEL will not make any payment to the Inspectorate in connection with contractor's Welders/Electricians qualification tests etc.
2.8.7	Contractor shall be responsible for provision of Health and Sanitary arrangements (more particularly described in Contract Labour Regulation & Abolition Act), Safety precautions etc. as may be required for safe and satisfactory execution of contract.
2.8.8	The contractor shall be responsible for proper accommodation including adequate medical facilities for personnel employed by him.
2.8.9	The contractor shall be responsible for the proper behavior and observance of all regulations by the staff employed by him.
2.8.10	The contractor shall ensure that no damage is caused to any person/property of other parties working at site. If any such damage is caused, it is responsibility of the contractor to make good the losses or compensate for the same.
2.8.11	All the properties/equipments/components of BHEL/their Client loaned with or without deposit to the contractor in connection with the contract shall remain properties of BHEL/their Client.
2.8.12	The contractor shall use such properties for the purpose of execution of this contract. All such properties/equipments/components shall be deemed to be in good condition when received by the contractor unless he notifies within 48 hours to the contrary. The contractor shall return them in good condition as and when required by BHEL/their Client. In case of non-return, loss, damage, repairs etc, the cost thereof as may be fixed by BHEL Engineer will be recovered from the contractor
2.8.13	In case the contractor is required to undertake any work outside the scope of this contract, the rates payable shall be those mutually agreed upon if the item rates are not mentioned in existing contract
2.8.14	Any delay in completion of works/or non achievement of periodical targets due to the reasons attributable to the contractor, the same may have to be compensated by the contractor either by increasing manpower and resources or by working extra hours and/or by working more than one shift. All these are to be carried out by the contractor at no extra cost.
2.8.15	The contractor shall arrange, coordinate his work in such a manner as to cause no hindrance to other agencies working in the same premises.
2.8.16	All safety rules and codes applied by the Client/BHEL at site shall be observed by the contractor without exception. The contractor shall be responsible for the safety of the equipment/material and works to be performed by him and shall maintain all light, fencing guards, slings etc. or other protection necessary for the purpose. Contractor shall also take such additional precautions as may be indicated from time to time by the Engineer with a view to prevent pilferage, accidents, fire hazards. Due precautions shall be taken against fire hazards and atmospheric conditions. Suitable number of Clerical staff, watch and ward, store keepers to take care of equipment/materials and construction tools and tackles shall be posted at site by the contractor till the completion of work

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 19 OF 30

under this contract.

The contractor shall arrange for such safety devices as are necessary for such type of work and carry out the requisite site tests of handling equipment, lifting tools, tackles etc. as per prescribed standards and practices.

Contractor has to ensure the implementation of Health, Safety and Environment (HSE) requirements as per directions given by BHEL/Customer. The contractor has to assist in HSE audit by BHEL/Customer and submit compliance Report. The contractor has to generate and submit record/reports as per HSE plan/activities as per instruction of BHEL/Customer

- 2.8.17 The contractor will be directly responsible for payment of wages to his workmen. A pay roll sheet giving all the payments given to the workers and duly signed by the contractor's representative should be furnished to BHEL site for record purpose, if so called for.
- 2.8.18 In case of any class of work for which there is no such specification as laid down in the contract, such work shall be carried out in accordance with the instructions and requirements of the Engineer.
- 2.8.19 Also, no idle charges will be admissible in the event of any stoppage caused in the work resulting in contractor's labour and Tools & Plants being rendered idle due to any reason at any time.
- 2.8.20 The contractor shall take all reasonable care to protect the materials and work till such time the plant/equipment has been taken over by BHEL or their Client whichever is earlier.
- 2.8.21 The contractor shall not stop the work or abandon the site for whatsoever reason of dispute, excepting force majeure conditions. All such problems/disputes shall be separately discussed and settled without affecting the progress of work. Such stoppage or abandonment shall be treated as breach of contract and dealt with accordingly
- 2.8.22 The contractor shall keep the area of work clean and shall remove the debris etc. while executing day-to-day work. Upon completion of work, the contractor shall remove from the vicinity of work, all scrap, packing materials, rubbish, unused and other materials and deposit them in places specified by the Engineer. The contractor will also demolish all the hutments, sheds, offices, etc. constructed and used by him and shall clean the debris. In the event of his failure to do so, the same will be arranged to be done by the Engineer and the expenses recovered from the contractor.
- 2.8.23 The contractor shall execute the work in the most substantial and workman like manner in the stipulated time. Accuracy of work and timely execution shall be the essence of this contract. The contractor shall be responsible to ensure that the quality, assembly and workmanship conform to the dimensions and clearance given in the drawings and/ or as per the instructions of the Engineer.
- 2.8.24 The Contractor to note that some of BHEL's T&Ps/MMDs may not be insured. The Contractor will take necessary precautions and due care to protect the same while in his custody from any damage/ loss till the same is handed over back to BHEL. In case the damage / loss is due to carelessness/ negligence on the part of the contractor, the Contractor is liable to get them repair/

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 20 OF 30

replaced immediately and in case of his failure to do so within a reasonable time, BHEL will reserve the right to recover the loss from the contractor.	
2.9	PROGRESS MONITORING, MONTHLY REVIEW AND PERFORMANCE EVALUATION
2.9.1	A detailed plan/programme for completion of the contractual scope of work as per the time schedule given in the contract shall be jointly agreed between BHEL and Contractor, before commencement of work . The above programme shall be supported by monthwise deployment of resources viz Manpower, T&P, Consumables, etc. Progress will be reviewed periodically (Daily/Weekly/Monthly) vis a vis this jointly agreed programme. The Contractor shall submit periodical progress reports (Daily/Weekly/Monthly) and other reports/information including manpower, consumables, T&P mobilization etc as desired by BHEL.
2.9.2	Monthly progress review between BHEL and Contractor shall be based on the agreed programme as above, availability of inputs/fronts etc, and constraints if any, as per prescribed formats. Manpower, T&P and consumable reports as per prescribed formats shall be submitted by contractor every month. Release of RA Bills shall be contingent upon certification by BHEL Site Engineer of the availability of the above prescribed formats duly filled in and signed.
2.9.3	The burden of proof that the causes leading to any shortfall is not due to any reasons attributable to the contractor is on the contractor himself. The monthly progress review shall record shortfalls attributable to (i) Contractor, (ii) Force Majeure Conditions, and (iii) BHEL
2.9.4	Performance of the Contractor shall be assessed as per prescribed formats and shall form the basis for 'Annual/Overall Performance Evaluation' of the Contractor and also for 'Assessment of Capacity of Bidder' for Tenders where the Contractor is a bidder. BHEL reserves the right to revise the evaluation formats during the course of execution of the works
2.10	TIME OF COMPLETION
2.10.1	The time schedule shall be as prescribed in the Contract. The time for completion shall be reckoned from the date of commencement of work at Site as certified by BHEL Engineers
2.10.2	The entire work shall be completed by the contractor within the time schedule or within such extended periods of time as may be allowed by BHEL under clause 2.11
2.11	EXTENSION OF TIME FOR COMPLETION
2.11.1	If the completion of work as detailed in the scope of work gets delayed beyond the contract period, the contractor shall request for an extension of the contract and BHEL at its discretion may extend the Contract.
2.11.2	Based on the monthly reviews jointly signed, the works balance at the end of original contract period less the backlog attributable to the contractor shall be quantified, and the number of months of 'Time extension' required for completion of the same shall be jointly worked out. Within this period of 'Time extension', the contractor is bound to complete the portion of backlog attributable to the contractor. Any further 'Time extension' or 'Time extensions' at the end of the previous extension shall be worked out similarly.
2.11.3	However if any 'Time extension' is granted to the contractor to facilitate continuation of work and completion of contract, due to backlog attributable to the contractor alone, then it shall be without prejudice to the rights of BHEL to impose penalty/LD for the delays attributable to the contractor, in addition to any other actions BHEL may wish to take at the risk and cost of contractor.
2.11.4	A joint programme shall be drawn for the balance amount of work to be completed during the period of 'Time Extension', along with matching resources (with weightages) to be deployed by the contractor as per specified format. Review of the programme and record of shortfall shall be done

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 21 OF 30

every month of the 'Time extension' period in the same manner as is done for the regular contract period. 2.11.5 During the period of 'Time extension', contractor shall maintain their resources as per mutually agreed program 2.11.6 At the end of total work completion as certified by BHEL Engineer, and upon analysis of the total delay, the portion of time extensions attributable to (i) Contractor, (ii) Force majeure conditions, and (iii) BHEL, shall be worked out and shall be considered to be exhausted in the same order. The total period of time extensions shall be the sum of (i), (ii) and (iii) above and shall be equal to period between the scheduled date of completion and the actual date of completion of contract. LD shall be imposed/levied for the portion of time extensions attributable to contractor and recoverable from the dues payable to the contractor.	
2.12	OVERRUN COMPENSATION
2.12.1	Over Run Compensation (ORC) is payable for works done during the extension period, by way of rate revisions for periods beyond original contract period subject to the following terms and conditions.
2.12.2	Rates shall be increased by 10% for the first twelve months of one or more extensions beyond original contract period. For the next twelve months of further extensions if any, rates shall be increased as above by 10% over the previous twelve months, and similarly for each subsequent twelve months extension.
2.12.3	The amount of increase payable per month due to rate revisions is subject to a minimum of Rs 1,00,000/- per month and a maximum of Rs 10,00,000/- per month.
2.12.4	Should there be any 'Time extension' for reasons attributable only to the contractor, then the work shall be executed by the contractor at the rates applicable for the period the work was planned
2.12.5	Payment of ORC shall be regulated as follows: i) Contractor is entitled to Over Run Compensation (ORC) only for the portion of backlog attributable to BHEL. ii) 50% of the compensation as per clause 2.12.3 is allocated for deployment of resources agreed as per the joint programme drawn vide 2.11.4. Payment shall however be based on the actual deployment of resources for the month as certified by BHEL, as per weightages assigned therein iii) 50% of the compensation as per clause 2.12.3, is allocated for achieving of planned progress agreed as per the joint programme drawn vide 2.11.4. Payment shall be on pro rata basis for actual achieved quantities iv) Total Over Run Compensation shall be limited to 10% of the executed contract value as certified in Final Bill. For this purpose executed contract value excludes PVC, ORC, Supplementary/Additional Items and Extra Works done on Manday rate basis
2.12.6	Contractor shall not be entitled for any Over Run Compensation (ORC) for the portion of backlog attributable to the contractor. Such works shall be executed at the rates applicable for the period the work was planned
2.13	INTEREST BEARING RECOVERABLE ADVANCES
2.13.1	Normally no advance is payable to the contractor. However, advance payment in exceptional circumstances shall be interest bearing and secured through a Bank Guarantee and shall be limited to a maximum of 5% of contract value. This 'Interest Bearing Recoverable Advance' shall be

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 22 OF 30

payable in not less than two installments with any of the installment not exceeding 60% of the total eligible advance.	
2.13.2	In exceptional circumstances, with due justification, Competent Authority of BHEL is empowered to approve proposals for payment of additional interim interest bearing advance against Bank Guarantee, for resource augmentation towards expediting work for project implementation.
2.13.3	Bank Guarantee towards 'Interest Bearing Recoverable Advance' shall be atleast 110% of the advance so as to enable recovery of not only principle amount but also the interest portion, if so required.
2.13.4	Contractor shall establish the utilization of advance drawn before the release of next installment.
2.13.5	Payment and recovery of Interest Bearing Recoverable advance shall be at the sole discretion of BHEL and shall not be a subject matter of arbitration.
2.13.6	The rate of interest applicable for the above advances shall be the prime lending rate of State Bank of India prevailing at the time of disbursement of the advance + 2%, and such rate will remain fixed till the total advance amount is recovered
2.13.7	Unadjusted amount of advances paid shall not exceed 5% of the total contract value at any point of time. Recovery of advances shall be made progressively from each Running Bill such that the advance amounts paid along with the interest is fully recovered by the time the contractor's billing reaches 80% of contract value.
2.13.8	Recovery rate per month shall be the sum of: a. Not less than 10% of Running Bill amount b. Simple interest up to the date of RA Bill on the outstanding Principle amount/amounts
2.13.9	Contractor to submit Bank Guarantee as per prescribed formats for each of the advance and shall be valid for at least one year or the recovery duration or the balance contract period which ever is later. In case the recovery of dues does not get completed within the aforesaid BG period, the contractor shall renew the BG or submit fresh BG for the outstanding amount and the remaining recovery period.
2.13.10	BHEL is entitled to make recovery of the entire outstanding amount in case the contractor fails to comply with the BG requirement
2.14	QUANTITY VARIATION
2.14.1	The quoted rates shall remain firm irrespective of any variations in the individual quantities. No compensation becomes payable in case the variation of the final executed contract value is within the limits of Plus (+) or Minus (-) 15% of awarded contract value
2.14.2	Compensation due to variation of final executed value in excess of the limits defined in clause above, shall be as follows: i) In case the finally executed contract value reduces below the lower limit of Contract Value due to quantity variation specified above, the contractor will be eligible for compensation @ 15% of the difference between the lower limit of the contract value and the actual executed value. ii) In case the finally executed contract value increases above the upper limit of Contract Value

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 23 OF 30

due to quantity variation specified above, there will be no revision in the rates within the contract period.

2.15 EXTRA WORKS

- 2.15.1 All rectifications/modifications, revamping, and reworks required for any reasons not due to the fault of the contractor, or needed due to any change in deviation from drawings and design of equipments, operation/maintenance requirements, mismatching, or due to damages in transit, storage and erection/commissioning, and other allied works which are not very specifically indicated in the drawings, but are found essential for satisfactory completion of the work, will be considered as extra works.
- 2.15.2 Extra works arising on account of the contractor's fault, irrespective of time consumed in rectification of the damage/loss, will have to be carried out by the contractor free of cost. Under such circumstances, any material and consumable required for this purpose will also have to be arranged by the contractor at his cost.
- 2.15.3 All the extra work should be carried out by a separately identifiable gang, without affecting routine activities. Daily log sheets in the pro-forma prescribed by BHEL should be maintained and shall be signed by the contractor's representative and BHEL engineer. No claim for extra work will be considered/entertained in the absence of the said supporting documents i.e. daily log sheets. Signing of log sheets by BHEL engineer does not necessarily mean the acceptance of such works as extra works.
- 2.15.4 BHEL retains the right to award or not to award any of the major repair/rework/modification/rectification/fabrication works to the contractor, at their discretion without assigning any reason for the same
- 2.15.5 After eligibility of extra works is established and finally accepted by BHEL engineer/designer, payment will be released on competent authority's approval at the following rate.
- MAN-HOUR RATE FOR ELIGIBLE EXTRA WORKS:** Single composite average labour man-hour rate, including overtime if any, supervision, use of tools and tackles and other site expenses and incidentals, consumables for carrying out any major rework/repairs/rectification/modification/fabrication as certified by site as may arise during the course of erection, testing, commissioning or extra works arising out of transit, storage and erection damages, payment, if found due will be at Rs 60/- per man hour.
- 2.15.6 The above composite labour man hour rate towards extra works shall remain firm and not subject to any variation during execution of the work. PVC will not be applicable for extra works. Rate revision, Over Run Charges/compensation etc will not be applicable due to extra works.
- 2.15.7 **Extra Works for Civil Packages** shall be regulated as follows
- i) Rates for Extra Works arising due to (1) non availability of BOQ (Rate Schedule), OR (2) change in Specifications of materials/works (3) rectification/modification/dismantling & re erecting etc due to no fault of Contractor, shall be in the order of the following:

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 24 OF 30

a) Item rates are to be derived from similar nature of items in the BOQ (Rate Schedule) with applicable escalation derived from All India Consumer Price Index for Whole Sale Commodities. b) As per CPWD-DSR-2007 (or latest edition) with applicable escalation derived from All India Consumer price Index for Whole Sale Commodities, OR, Notification issued by the office of CPWD for 'Cost Index' in that Region where the project is being executed, whichever is less c) Item rates are to be worked out on the basis of prevailing market rates mutually agreed between BHEL and Contractor, plus 15% towards Contractor's overheads and profit. ii) PVC and ORC will not applicable be for (i) above.

2.16 SUPPLEMENTARY ITEMS 2.16.1 For NON Civil Works Supplementary items are items/works required for completion of entire work but not specified in the scope of work. Subject to certification of such items/works as supplementary items by BHEL Engineer, rates shall be derived on the basis of any one of the following on mutual agreement: i) Based on percentage breakup/rates indicated for similar/nearby items ii) In case (i) above does not exist, then BHEL/site may derive the percentage breakup/rates to suit the type of work 2.16.2 For Civil Works i) <u>Rates for Supplementary Works/Additional Works arising out due to additions/alterations in the original scope of works as per contract subject to certification of BHEL Engineer shall be worked out as under:</u> a) Item rates which are available in existing BOQ (Rate Schedule) shall be operated with applicable escalation derived from All India Consumer Price Index for Whole Sale Commodities b) Items of works which are not available in existing BOQ shall be operated as an 'Extra Works' and rate shall be derived as per clause no 2.15.7 ii) Execution of Supplementary Works/Additional Works through the Contractor shall be at the sole discretion of BHEL, and shall be considered as part of executed contract value for the purpose of Quantity Variation as per clause 2.14 iii) BHEL Engineer's decision regarding fixing the rate as above is final and binding on the contractor. iv) PVC and ORC will not be applicable for (i) above.

2.17 **PRICE VARIATION COMPENSATION**

2.17.1 In order to take care of variation in cost of execution of work on either side, due to variation in the index of LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS, Price Variation Formula as described herein shall be applicable

2.17.2 85% component of Contract Value shall be permitted to be adjusted for variation in various relevant indices during execution of work. The remaining 15% shall be treated as fixed component

2.17.3 The basis for calculation of price variation in each category, their component, Base Index, shall be as under:

SL NO.	CATEGORY	BASE INDEX	COMPONENT ('K')		
			CIVIL PACKAGES (See Note A/B/C)	MECHANICAL PACKAGES	LABOUR ORIENTED

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 25 OF 30

			A	B**	C		PACKAGES (See Note D)
i)	LABOUR (ALL CATEGORIES)	'MONTHLY ALL-INDIA AVERAGE CONSUMER PRICE INDEX NUMBERS FOR INDUSTRIAL WORKERS' published by Labour Bureau, Ministry of Labour and Employment, Government of India. (Website: labourbureau.nic.in)	40	25	30	65	80
ii)	HIGH SPEED DIESEL OIL	Name of Commodity : HSD OIL. Type : INDIVIDUAL COMMODITY (See Note F)	5	3	5	5	5
iii)	WELDING ROD	Name of Commodity : WELDING ROD Type: INDIVIDUAL COMMODITY (See Note F)				15	
iv)	CEMENT	Name of Commodity : GREY CEMENT Type: INDIVIDUAL COMMODITY (See Note F)		20	30		
v)	STEEL (Structural and Reinforcement Steel)	Name of Commodity : a1. IRON & SEMIS Type: GROUP ITEM (See Note F)		25			
vi)	MATERIALS (Other than Cement & Steel)	Name of Commodity: ALL COMMODITIES Type: GROUP ITEM (See Note F)	40	12	20		

Note: A) Cement & Steel : Free Issue (BHEL Scope)

B) Cement & Steel : In Contractor Scope {**: unless otherwise specified in Special Conditions of Contract (SCC) }

C) Cement in Contractor Scope, and Steel is Free Issue (BHEL Scope)

D) Predominantly 'Labour Oriented' packages including Material Handling & Management, Insulation, Painting, Electrical and CI or a combination thereof, which are separately tendered and awarded

E) For Composite packages (i.e. Civil+Mechanical+Electrical/CI or Civil+Mechanical or Mechanical+Electrical/CI), the components for various categories shall be as per respective packages

F) As per the 'MONTHLY WHOLE SALE PRICE INDEX' for the respective Commodity and Type, published by Office of Economic Adviser, Ministry of Commerce and Industry, Government of India. (Website : www.eaindustry.nic.in). Revisions in the index or commodity will be re adjusted accordingly.

2.17.4 Payment/recovery due to variation in index shall be determined on the basis of the following notional formula without any initial absorption, in respect of the identified components viz LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS

$$P = K \times R \times \frac{(X_N - X_0)}{X_0}$$

Where

P = Amount to be paid/recovered due to variation in the Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

K = Percentage component applicable for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

R = Value of work done for the billing month (Excluding Taxes and Duties if payable extra)

XN = Revised Index No for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials for the billing month under consideration

Xo = Index no for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials as on the Base date.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 26 OF 30

2.17.5 Base date shall be calendar month of the latest date of submission of Tender.

2.17.6 PVC shall not be payable for the ORC amount, Supplementary/Additional Items, Extra works.

2.17.7 The contractor shall furnish necessary monthly bulletins for the necessary indices from the relevant websites along with his Bills.

2.17.8 The contractor will be required to raise the bills for price variation payments on a monthly basis along with the running bills irrespective of the fact whether any increase/decrease in the index for relevant categories has taken place or not. In case there is delay in publication of bulletins (final figure), the provisional values as published can be considered for payments and arrears shall be paid/recovered on getting the final values.

2.17.9 PVC shall be applicable for the entire original contract period plus the extended period. However the Total Quantum of Price Variation amount payable/recoverable shall be regulated as follows:

- i) For the portion of backlog attributable to the contractor, the PVC will be based on the average of the indices for the period of the original contract period.
- ii) For the period of Force Majeure, the PVC will be limited to the indices applicable at the beginning of the force majeure period.
- iii) For the portion of backlog attributable to BHEL, the PVC will be as per the indices applicable for the respective months
- iv) The total amount of PVC shall not exceed 20% of the cumulatively executed contract value. Executed contract value for this purpose is exclusive of PVC, ORC, Supplementary/Additional Items and Extra works.

2.18 INSURANCE

2.18.1 BHEL/their customer shall arrange for insuring the materials/properties of BHEL/customer covering the risks during transit, storage, erection and commissioning.

2.18.2 It is the sole responsibility of the contractor to insure his materials, equipments, workmen, etc. against accidents and injury while at work and to pay compensation, if any, to workmen as per Workmen's compensation Act. The work will be carried out in a protected area and all the rules and regulations of the client /BHEL in the area of project which are in force from time to time will have to be followed by the contractor.

2.18.3 If due to negligence and or non-observation of safety and other precautions by the contractors, any accident/injury occurs to the property / manpower belong to third party, the contractor shall have to pay necessary compensation and other expense, if so decided by the appropriate authorities.

2.18.4 The contractor will take necessary precautions and due care to protect the material, while in his custody from any damage/ loss due to theft or otherwise till the same is taken over by BHEL or customer. For lodging / processing of insurance claim the contractor will submit necessary documents. BHEL will recover the loss including the deductible franchise from the contractor, in case the damage / loss is due to carelessness / negligence on the part of the contractor. In case of any theft of material under contractor's custody, matter shall be reported to police by the contractor immediately and copy of FIR and subsequently police investigation report shall be submitted to BHEL for taking up with insurance. However this will not relieve the contractor of his

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 27 OF 30

contractual obligation for the material in his custody.	
2.19	STRIKES & LOCKOUT 2.19.1 The contractor will be fully responsible for all disputes and other issues connected with his labour. In the event of the contractor's labour resorting to strike or the Contractor resorting to lockout and if the strike or lockout declared is not settled within a period of one month, BHEL shall have the right to get the work executed through any other agencies and the cost so incurred by BHEL shall be deducted from the Contractor's bills. 2.19.2 For all purposes whatsoever, the employees of the contractor shall not be deemed to be in the employment of BHEL
2.20	FORCE MAJEURE The following shall amount to Force Majeure:- 2.20.1 Acts of God, act of any Government, War, Sabotage, Riots, Civil commotion, Police action, Revolution, Flood, Fire, Cyclones, Earth quake and Epidemic and other similar causes over which the contractor has no control. 2.20.2 If the contractor suffers delay in the due execution of the contractual obligation due to delays caused by force majeure as defined above, the agreed time of completion of the job covered by this contract or the obligations of the contractor shall be extended by a period of time equal to period of delay, provided that on the occurrence of any such contingency, the contractor immediately reports to BHEL in writing the causes of delay and the contractor shall not be eligible for any compensation.
2.21	ARBITRATION & RECONCILIATION 2.21.1 In case amicable settlement is not reached in the event of any dispute or difference arising out of the execution of the Contract or the respective rights and liabilities of the parties or in relation to interpretation of any provision by the Contractor in any manner touching upon the Contract, such dispute or difference shall (except as to any matters, the decision of which is specifically provided for therein) be referred to the sole arbitration of the arbitrator appointed by BHEL/In charge(Region). The award of the Arbitrator shall be binding upon the parties to the dispute Subject as aforesaid, the provisions of Arbitration and Reconciliation Act 1996 (India) or statutory modifications or re enactments thereof and the rules made there under and for the time being in force shall apply to the arbitration proceedings under this clause. The venue of the arbitration shall be the place from which the contract is issued or such other place as the Arbitrator at his discretion may determine 2.21.2 In case of Contract with Public Sector Enterprise (PSE) or a Government Department, the following shall be applicable :

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 28 OF 30

In the event of any dispute or difference relating to the interpretation and application of the provisions of the Contract, such dispute or difference shall be referred to by either party to the arbitration of one of the arbitrators in the department of public enterprises. The award of the arbitrator shall be binding upon the parties to the dispute, provided, however, any party aggrieved by such award may make further reference for setting aside or revision of the award to the Law Secretary, Department of Legal Affairs, Ministry of Law and Justice, Government of India. Upon such reference the dispute shall be decided by the Law Secretary or the Special Secretary or Additional Secretary when so authorized by the Law Secretary, whose decision shall bind the parties hereto finally and conclusively.

2.21.3 The cost of arbitration shall be borne equally by the parties.

2.21.4 Work under the contract shall be continued during the arbitration proceedings

2.22 RETENTION AMOUNT

2.22.1 Retention Amount shall be 5% of executed contract value and shall be recovered at the rate of 5% from each Running Bill admitted, including PVC Bills.

2.22.2 Refund of Retention Amount shall be as follows:

- i) 50% of retention amount along with 'Final Bill'
- ii) Balance 50% of retention amount shall be retained towards 'Performance Guarantee for Workmanship' and shall become refundable after expiry of Guarantee period, provided all the defects noticed during the guarantee period have been rectified to the satisfaction of BHEL Site Engineer/BHEL Construction Manager, and after deducting all expenses/other amounts due to BHEL under the contract/other contracts entered into by BHEL with them. This portion of the retention amount can be released on commencement of the Guarantee period, on submission of equivalent Bank Guarantee.

2.23 PAYMENTS

Payments to Contractors are made in any one of the following forms

2.23.1 Running Account Bills (RA Bills)

- i) These are for interim payments when the contracts are in progress. The bills for such interim payments are to be prepared by Contractor in prescribed formats (RA Bill forms).
- ii) Payments shall be made according to the extent of work done as per measurements taken up to the end of the calendar month and in line with the terms of payments described in the Tender documents
- iii) Recoveries on account of electricity, water, statutory deductions, etc are made as per terms of contract
- iv) Full rates for the work done shall be allowed only if the quantum of work has been done as per the specifications stipulated in the contract. If the work is not executed as per the stipulated specifications, BHEL may ask the contractor to re do the work according to the required specifications, without any extra cost. However, where this is not considered necessary 'OR' where the part work is done due to factors like non-availability of material to be supplied by BHEL 'OR' non availability of fronts 'OR' non availability of drawings, fraction payment against full rate, as is considered reasonable, may be allowed with due regard for the work remaining to be done. BHEL decision in this regard will be final and

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 29 OF 30

binding on the contractor. v) In order to facilitate part payment, BHEL Site Engineer at his discretion may further split the contracted rates/percentages to suit site conditions, cash flow requirements according to the progress of work 2.23.2 Final Bill Final Bill' is used for final payment on closing of Running Account for works or for single payment after completion of works. 'Final Bill' shall be submitted as per prescribed format after completion of works as per scope and upon material reconciliation, along with the following. i) 'No Claim Certificate' by contractor ii) Clearance certificates where ever applicable viz Clearance Certificates from Customer, various Statutory Authorities like Labour department, PF Authorities, Commercial Tax Department, etc iii) Indemnity bond as per prescribed format BHEL shall settle the final bills after deducting all liabilities of Contractor to BHEL		
2.24	PERFORMANCE GUARANTEE FOR WORKMANSHIP	
2.24.1	Even though the work will be carried out under the supervision of BHEL Engineers the Contractor will be responsible for the quality of the workmanship and shall guarantee the work done for a period of twelve months from the date of commencement of guarantee period as defined in Special Conditions of Contract, for good workmanship and shall rectify free of cost all defects due to faulty erection detected during the guarantee period. In the event of the Contractor failing to repair the defective works within the time specified by the Engineer, BHEL may proceed to undertake the repairs of such defective works at the Contractor's risk and cost, without prejudice to any other rights and recover the same from the Guarantee money.	
2.24.2	BHEL shall release the guarantee money subject to the following i) Contractor has submitted 'Final Bill' ii) Guarantee period as per contract has expired iii) Contractor has furnished 'No Claim Certificate' in specified format iv) BHEL Site Engineer/Construction Manager has furnished the 'No Demand Certificate' in specified format v) Contractor has carried out the works required to be carried out by him during the period of Guarantee and all expenses incurred by BHEL on carrying out such works is included for adjustment from the Guarantee money refundable.	
2.25	CLOSING OF CONTRACTS The Contract shall be considered completed and closed upon completion of all contractual obligations and settlement of Final Bill or completion of Guarantee period whichever is later. Upon closing of Contract, BHEL shall issue a completion certificate as per standard format, based on specific request of Contractor.	
2.26	REVERSE AUCTION: BHEL reserves the right to go for Reverse Auction for Price Bid Opening by BHEL appointed service provider, instead of opening the submitted sealed price bid in the conventional way. The Business Rules for Reverse Auction shall be as per BHEL guidelines issued from time to time.	
2.27	SUSPENSION OF BUSINESS DEALINGS BHEL reserves the right to take action against Contractors who either fail to perform or Tenderers/Contractor who indulge in malpractices, by suspending business dealings with them in	

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 30 OF 30

line with BHEL guidelines issued from time to time.	
2.28	OTHER ISSUES
2.28.1	Value of Non judicial Stamp Paper for Bank Guarantees and for Contract Agreement shall be not less than Rs 100/- unless otherwise required under relevant statutes.
2.28.2	In case of any conflict between the General Conditions of Contract and Special Conditions of Contract, provisions contained in the Special Conditions of Contract shall prevail.
2.28.3	Unless otherwise specified in NIT, offers from consortium/JVs shall not be considered.
2.28.4	BHEL may not insist for signing of Contract Agreements in respect of low value and short time period contracts like providing services for Hot water flushing, Chemical Cleaning, Transportation, etc

TENDER NO: PSER:SCT:NKP-C1999:19

VOLUME -ID

SPECIAL CONDITIONS OF CONTRACT

FOR

**BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF
3X660 MW NORTH KARANPURA STPP, JHARKHAND.**

BHARAT HEAVY ELECTRICALS LIMITED

(A GOVT. OF INDIA UNDERTAKING)

POWER SECTOR – EASTERN REGION

PLOT NO. – 9 / 1, DJ – BLOCK,

SECTOR – II, KARUNAMOYEE,

SALT LAKE CITY,

KOLKATA – 700091.

Bharat Heavy Electricals Limited Power Sector – Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NKP-C1999:19		
VOLUME-ID	SPECIAL CONDITIONS OF CONTRACT (SERVICE)	PAGE1OF47

CONTENTS

SN	DESCRIPTION	Chapter	No. OF PAGES
1	General Intent of the Specifications	Chapter-I	
2	General Services to be rendered by the Bidder	Chapter-II	
3	General Technical Requirements (Codes and Standards)	Chapter-III	
4	Obligations of Contractor (In respect of Tools, Tackles, Consumables, etc employment of supervisory staff and workmen)	Chapter-IV	
5	Responsibilities of Contractor (In respect of employment of Labour, Supervisory staff, etc)	Chapter-V	
6	Material Handling, Storage, Preservation, etc	Chapter-VI	
7	Drawings and Documents	Chapter-VII	
8	Inspection and Quality	Chapter-VIII	
9	HSE & OHSAS Obligations	Chapter-IX	
10	RA Bill Payment	Chapter-X	
11	Performance Monitoring	Chapter-XI	
12	Suspension of Business Dealings	Chapter-XII	

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - I : General Intent of Specifications

1.0	INTENT OF THE SPECIFICATION
1.1	The intent of this erection specification is to provide services for execution of the project according to most modern and proven techniques and codes. The omission of specific reference to any method, equipment or material necessary for the proper and efficient services towards installation of the plant shall not relieve the contractor of the responsibility of providing such services / facilities to complete the work or portion of work awarded to him. The quoted / accepted rates / price shall deem to be inclusive of all such contingencies.
1.2	The work shall conform to dimensions and tolerances given in various drawings and documents that will be provided during erection. If any portion of works is found to be defective in workmanship and not conforming to drawings / documents or other stipulations, the contractor shall dismantle and re-do the work duly replacing the defective materials at their own cost, failing which recoveries, as determined by BHEL, shall be effected from contractor's bills.
1.3	It is not the intent of this specification to specify herein all the details of erection and commissioning. However, the system shall conform in all respects to high standards of quality and workmanship for performing the required duties in a manner acceptable to purchaser who will interpret the meaning of drawings and specifications and shall be entitled to reject any work or material, which in his judgments is not in full accordance herewith.
1.4	The omission of specific reference to any fabrication / erection or other method, equipment or material necessary for proper and efficient working of the plant shall not relieve the tenderer of the responsibility of providing such facilities to complete the work at quoted rates. Any mismatch/ defect found due to mistake in fabrication / erection shall have to be rectified by the vendor free of cost. Inspection by BHEL/Customer does not relieve vendor of his responsibility of executing quality erection.
1.5	The work covered under this specification is of highly sophisticated nature, requiring the best quality workmanship, supervision, engineering and construction management. The contractor should ensure proper planning and successful and timely completion of the work to meet the overall project schedule. The contractor must deploy adequate quantity of tools & plants, modern / latest construction aids etc. He must also deploy adequate trained, qualified and experienced supervisory staff and skilled personnel.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - I : General Intent of Specifications

1.6	Contractor shall erect and commission all the equipments and auxiliaries as per the sequence & methodology prescribed by BHEL depending upon the technical requirements. Availability of materials and fronts will decide this. BHEL Engineer's decision regarding correctness of the work and method of working shall be final and binding on the contractor. No claims for extra payment from the contractor will be entertained on the ground of deviation from the methods / sequence adopted in erection of similar sets elsewhere.
1.7	Following shall be the minimum responsibility of contractor and have to be provided within finally accepted rates / prices:
1.7.1	Provision as required of all types of labour, supervisors, engineers, watch and ward, tools & tackles, calibrated MMEs (Monitoring and Measuring Equipment) as specified and otherwise required for the work, consumables for erection, testing and commissioning including material handling
1.7.2	Achieving Proper out-turn / Turn-over as per BHEL plan and commitment.
1.7.3	Completion of work as per BHEL Schedule
1.7.4	Good quality and accurate workmanship for proper performance of the equipment
1.7.5	Repair and rectification
1.7.6	Preservation / Re-conservation of all components during storage / erection / commissioning till handing over.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - II : General Services to be rendered by the Bidder

2.0	GENERAL SERVICES TO BE RENDERED BY THE BIDDER
2.1	Services for construction, fabrication, equipment erection testing as well as trial run & commissioning of various equipment and accessories under the contract shall include but not be limited to the following:
2.2	Issuing materials from store/open yard from time to time for erection as per the construction programme. The Contractor shall be the custodian of all the materials issued till the plant/equipment is officially taken over by the owner / BHEL after complete erection any successful trial run & commissioning.
2.3	Transport of material to their respective places of erection and erection of the complete plant & equipment as supplied under this specification.
2.4	Trial run and commissioning of individual equipment / sub-systems to the satisfaction of Owner/BHEL.
2.5	Deployment of all skilled and unskilled manpower required for erection, supervision of erection, watch & ward, commissioning and other services to be rendered under this specification.
2.6	Deployment of all erection tools & tackle, construction machinery, transportation vehicles and all other implements in adequate number and size, appropriate for the erection work to be handled under scope of this specification except otherwise specified.
2.7	Supply of all consumables, eg welding electrodes, cleaning agents, diesel oil, lubricant etc as well as materials required for temporary supports, scaffolding etc as necessary for such erection work, unless specified other wise.
2.8	Providing support services for the contractor's erection staff eg construction of site offices, temporary stores, residential accommodation and transport to work site for erection personnel, watch and ward for security and safety of the materials under the Contractor's custody etc. as required.
2.9	Maintaining proper documentation of all the site activities undertaken by the Contractor as per the proforma mutually agreed with BHEL, Submission of monthly progress reports and any such document as and when desired by BHEL/owner, taking approval of all statutory authorities i.e Boiler Inspector, Factory Inspector, Inspector of Explosives etc , as applicable for respective portions of work fall under the jurisdiction of such statutes of laws.
2.10	Any other service, although not specifically called for but required for a contract of the size and nature indicated in the specification.

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter - III : General Technical Requirements (Codes and Standards)

3.0	GENERAL TECHNICAL REQUIREMENTS (CODES AND STANDARDS)
3.1	Except where otherwise specified, the plant/equipment shall comply with the appropriate Indian Standard or an agreed internationally accepted Standard Specification as mentioned elsewhere in contract specifications, each incorporating the latest revisions at the time of tendering. Where no internationally accepted standard is applicable, the Bidder shall give all particulars and details as necessary, to enable BHEL to identify all of the plant/equipment in the same detail as would be possible had there been a Standard Specification.
3.2	Where the Bidder proposes alternative codes or standards he shall include in his tender one copy (in English) of each Standard Specification to which materials offered shall comply. In such case, the adopted alternative standard shall be equivalent or superior to the standards mentioned in the specification.
3.3	In the event of any conflict between the codes and standards referred above, and the requirements of this specification, the requirements which are more stringent shall govern.
3.4	Tools used during erection and commissioning shall not be accepted except with the specific approval of the Engineer.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

4.0	OBLIGATIONS OF CONTRACTOR
4.1	CONSUMABLES & OTHER ITEMS
4.1.1	The contractor shall provide within finally accepted price / rates, all consumables (excepting those indicated in BHEL scope) like welding electrodes (including alloy steel and stainless steel), filler wires, TIG filler wires (over & above as supplied by the unit along with the plant materials, which will be given free of cost to bidder), gases (inert, welding, cutting), soldering material, dye penetrants, radiography films, etc. Other erection consumables such as tapes, jointing compound, grease, mobile oil, M-seal, Araldite, petrol, CTC / other cleaning agents, grinding and cutting wheels are to be provided by the contractor. Steel, packers, shims, wooden planks, scaffolding materials hardware items etc required for temporary works such as supports, scaffoldings are to be arranged by the contractor. Sealing compounds, gaskets, gland packing, wooden/concrete sleepers, for temporary work, required for completion of work except those which are specifically supplied by manufacturing unit are also to be arranged by the contractor.
4.1.2	All the shims, gaskets and packing, which go finally as part of plant equipment, shall be supplied by BHEL free of cost.
4.1.3	It shall be the responsibility of the contractor to plan the activities and store sufficient quantity of consumables. Non-availability of any consumable materials or equivalent suggested by BHEL cannot be considered as reason for not attaining the required progress or for additional claim.
4.1.4	<u>TIG Filler wire for Boiler and Filler wires for Electrodes for P91/T91 piping:</u> These shall be supplied by BHEL free of cost as supplied by BHEL Manufacturing Units as part of regular supply. Required quantity as arrived at by calculation / standards will only be supplied. It would be the contractors' responsibility to account for the consumption of these filler wires. Additional consumption beyond standard / calculated quantity will be at cost recovery basis only unless and otherwise accounted for. Surplus quantity of TIG filler wire, if any, shall be properly stored and returned to BHEL stores.
4.1.5	It shall be the responsibility of the contractor to obtain prior approval of BHEL, regarding suppliers, type of electrodes etc before procurement of welding electrodes. On receipt of electrodes at site these shall be subjected to inspection and approval by BHEL. The contractor shall inform BHEL details regarding type of electrodes, batch number, date of expiry etc and produce test certificate for each lot / batch with correlation of batch / lot number with respective test certificate. No

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	electrode without a valid test certificate will to be used.
4.1.6	BHEL reserves the right to reject the use of any consumable including electrodes, gases, lubricants / special consumables if it is not found to be of the required standard / make / purity or when shelf life has expired. Contractor shall ensure display of shelf life on consumable wherever required and records maintained.
4.1.7	Storage of all consumables including welding electrodes shall be done as per requirement / instruction of the Engineer by the contractor at his cost.
4.1.8	In case of improper arrangement for procurement of any consumable, BHEL reserves the right to procure the same from any source and recover the cost from the Contractor's first subsequent bill at market value plus the departmental charges of BHEL from time to time. Postponement of such recovery is normally not permitted. The decision of Engineer in this regard shall be final and binding on the Contractor.
4.1.9	All lubricants and chemicals required for pre-commissioning, commissioning, testing, preservation and lubricants for trial runs of the equipment shall be supplied by BHEL / BHEL's client. All services including labour and T&P will be provided by the contractor for handling, filling, emptying, refilling etc. The consumption of lubricants / chemicals shall be properly accounted for. Surplus material if any shall be properly stacked/tagged and returned to BHEL/ CUSTOMER stores at no extra cost to BHEL. BHEL reserves the right to recover costs for wastage by the contractor.
4.1.10	Transportation of oil drums, from stores, filling of oil for flushing, first filling, subsequent changeover if any, topping/making up till the unit is fully commissioned and handed over to customer is included in scope of this contract. The contractor shall have to return all the empty drums to BHEL / BHEL's client store at no extra cost. Any loss / damage to above drums shall be to contractor's account.
4.1.11	All charges on account of Octroi, terminal or sales tax and other duties on materials obtained from any source for carrying out the works in the scope of the contractor shall be borne by the contractor.
4.2	TOOLS AND PLANTS / MONITORING AND MEASURING EQUIPMENT (MMEs)
4.2.1	T&Ps and MMEs to be provided by Contractor
4.2.1.1	All T&Ps and MMEs excepting those specifically indicated in BHEL scope are to be provided by the Contractor. Contractor has to make his own arrangement at his cost for completing the formalities (including arrangement of Road permits, if any) if required with Sales Tax/VAT authorities, for bringing their materials, plants and

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	equipments at site for the execution of work under this contract.
4.2.1.2	All suitable cranes, lifting and transport equipments for material handling at stores/yard/siding of BHEL/Customer are included in scope. BHEL's cranes will not be available for this purpose unless otherwise specifically permitted as per contract conditions
4.2.1.3	All T&Ps to be deployed by the contractor shall have the approval of BHEL Engineer with regard to brand, quality and specification.
4.2.1.4	Indicative list of Major T&Ps in the scope of Contractor are given in the Technical Conditions of Contract. Bidders to note that these are only indicative and as such all other T&P necessary for timely and satisfactory completion of work in scope shall be mobilized by Contractor
4.2.1.5	Timely deployment of adequate T&Ps is the responsibility of the contractor. The contractor shall be prepared to augment the T&P at short notice to match the planned programme and to achieve the milestones.
4.2.1.6	Contractor shall maintain and operate his tools and plants in such a way that major breakdowns are avoided. In the event of major breakdown, contractor shall make alternative arrangements expeditiously so that the progress of work is not hampered.
4.2.1.7	In the event of contractor failing to arrange the required tools, plants, machinery, equipment, material or non-availability of the same owing to breakdown, BHEL will make alternative arrangement at the risk and cost of the contractor. Decision of BHEL shall be final and binding on the contractor
4.2.1.8	The T&P to be arranged by the contractor shall be in proper working condition and their operation shall not lead to unsafe condition. The movements of cranes, and other equipment should be such that no damage / breakage occurs to foundations, other equipments, material, property and men. All arrangements for the movement of the T&P etc shall be the contractor's responsibility.
4.2.1.9	Use of welding generators/ rectifiers only shall be permitted for welding. Use of welding transformers will be subject to specific approval of BHEL engineer.
4.2.1.10	The contractor at his cost shall carry out periodical testing of his construction equipments. Test certificates shall be furnished to BHEL.
4.2.1.11	Contractor shall ensure deployment of serviced and healthy T&Ps including cranes, lifting tackles, wire ropes, manila ropes, winches and slings etc. History card and maintenance records for major T&Ps will be maintained by the contractor and will be made available to BHEL Engineer for inspection as and when required.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	Fitness certificate / Test Certificates of T&P shall have to be submitted before it is put in use. Identification for such T&Ps will be done as per BHEL Engineer's advice. BHEL reserves the right to permit only new slings up to 20 mm and lifting tackles up to 3 MT capacities.
4.2.1.12	Contractor shall ensure deployment of reliable and calibrated MMEs (Inspection measuring and Monitoring equipment). The MMEs shall have test / calibration certificates from authorized / Government approved / accredited agencies traceable to National / International standards. Each MME shall have a label indicating calibration status i.e. date of calibration, calibration agency and due date for calibration. A list of such instruments deployed by contractor at site with its calibration status is to be submitted to BHEL Engineer for control.
4.2.1.13	Re-testing / re-calibration shall also be arranged at regular intervals during the period of use as advised by BHEL Engineer within the contract price. The contractor will also have alternate arrangements for such MME so that work does not suffer when the particular instrument is sent for calibration. If any MMEs not found fit for use, BHEL shall have the right to stop the use of such item. It will be necessary for the contractor to deploy proper item. Any readings taken by the defective instrument will be recalled and repeat the readings taken by that instrument with a proper one. In case he fails to do so, BHEL may deploy MMEs and retake the readings at contractor's cost.
4.2.1.14	BHEL shall have lien on all T&P, MMEs and other equipment of the contractor brought to the site for the purpose of erection, testing and commissioning. BHEL shall continue to hold the lien on all such items throughout the period of contract / extended period. The contractor and / or his sub-contractors, without the prior written approval of the Engineer, shall remove no material brought to the site.
4.2.1.15	The month wise T&P deployment plan to execute the work is to be submitted as per relevant format as per the instruction of BHEL. It shall be the contractor's responsibility to deploy the required T&P, for timely and successful completion of the job, to any extent.
4.2.2	Obligations in respect of T&Ps and MMEs provided by BHEL
4.2.2.1	T&P / MMEs being provided by BHEL to sub-contractor free of hire charges shall be shared by other subcontractors working for BHEL at site and the allotment done by BHEL Engineer shall be final and binding.
4.2.2.2	BHEL T&P will be issued in basic assembled condition. Additional loose components / sub-assemblies / attachments as and when necessary, will be

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	issued by BHEL. Assembly of such additional loose components/sub-assemblies/ attachments is in contractor's scope.
4.2.2.3	In case of non-availability of the T&Ps to be provided by BHEL due to breakdown, major overhauls, distribution pattern or any other reason, the contractor shall plan / amend / alter his activities to meet erection / commissioning targets in consultation with BHEL.
4.2.2.4	void
4.2.2.5	The contractor shall engage trained and experienced operators for the operation of BHEL's T&Ps. Their skill / performance will be checked by BHEL Engineer before they are allowed to operate the same. However checking of skills by BHEL does not absolve the contractor of his responsibilities for proper and safe handling of equipment, consistent good performance of operators and regular performance evaluation of operators.
4.2.2.6	The day to day operation and maintenance of BHEL's T&Ps (Other than cranes) shall be carried out by contractor as per manufacturer's / BHEL's maintenance schedule at his cost. The contractor shall arrange, at his own cost, trained operators, fuel and other consumables for their operation. BHEL shall arrange all spares needed for upkeep of major T&Ps provided like Huck Bolting Machine*, DG Set, Induction Machine and Hydraulic Test pumps. The contractor has to arrange for fixing of the spares; supervision in specialized cases will be provided by BHEL. For upkeep of all other T&Ps supplied by BHEL, spares shall be arranged by the Contractor. BHEL supplied T&Ps shall be maintained in good working condition during the entire period of use. T&Ps in defective / damaged condition shall be rectified promptly to the full satisfaction of BHEL engineer. Contractor shall maintain records for maintenance of major T&Ps. These shall be made available for Inspection whenever required. In case of any lapses on the part of the contractor, BHEL at its own discretion shall get the servicing / repair of equipment done at the risk and cost of the contractor along with BHEL overheads. Further, if there are breakdowns / damages due to negligence of the contractor, the complete service / repair charges and cost of all the spares damaged with BHEL overheads shall be recovered from contractor's RA bills. *: for operation and maintenance of ESP Huck bolting machine, BHEL shall provide the basic power rig and hose. Balance toolingsie Guns, chuck jaws etc are to be arranged by contractor.
4.2.2.7	void

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

4.2.2.8	Increasing / shortening of the crane boom to suit work requirements shall have to be arranged by the indenting contractor at his cost including restoration to a state as directed by BHEL. All necessary manpower tools, support, consumables, illumination etc. will have to be arranged by contractor at his cost. If required, contractor has to return the crane with original boom.
4.2.2.9	The area and infrastructure development of the area to be carried out by the customer. However in construction projects of this magnitude it is possible that all the areas / approaches may not be ready. In such cases backfilling of approaches where ever necessary, consolidation of ground and arrangement of sleepers / sand bag filling etc for safe operation / movement of equipment including cranes / trailers etc shall be the responsibility of the contractor at his cost. No compensation on this account shall be payable.
4.2.2.10	In the event of contractor not using and maintaining BHEL T&Ps according to BHEL's instructions. BHEL will have the right to withdraw such item without any notice and no claim in this regard shall be entertained and contractor shall be responsible for delay in execution on this account.
4.2.2.11	The contractor shall furnish regular utilization report of the BHEL T&Ps, as per requirement of BHEL.
4.2.2.12	Any loss / damage to any part of BHEL T&Ps and MMEs shall be to the contractor's account and any expenditure on these accounts by BHEL will be recovered from the contractor's bill in case the contractor fails to make good the loss.
4.2.2.13	It shall be responsibility of the contractor to take delivery of T&Ps and MMEs from stores or place of use by other contractor at project site, transport the same to site and return the same to BHEL store / place as intimated by Engineer in project site in good working conditions after use.
4.2.2.14	The contractor shall return BHEL T&Ps and MMEs issued to him in good working condition as and when desired by BHEL (on completion or reduction of workload). If contractor delays return of T&P and MME, hire charges as applicable shall be levied by BHEL from time, it was requisitioned till the time of actual return. T&Ps and MMEs returned in damaged / unserviceable condition shall be got repaired by BHEL at its own discretion and entire cost of repair with BHEL overheads shall be recovered from the contractor.
4.2.2.15	Replacement cost including BHEL overheads in respect of irreparable / completely damaged / non return of T&Ps and MMEs shall be recovered from the

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	contractor's running / final bills
4.2.2.16	Obligations in respect of Cranes provided by BHEL
a)	BHEL will make available the cranes (as per Technical Conditions of Contract) free of charge to the contractor on sharing basis mainly for the purposes enumerated/indicated therein. BHEL cranes have to be shared with other agencies / contractors of BHEL. The allocation of cranes shall be the discretion of BHEL engineer, which shall be binding on the contractor.
b)	BHEL Cranes may be initially issued in basic assembled condition. Any alteration/addition like boom reduction / extension, assembly of components/sub-assemblies needed for modulating the capacity/reach/other features of cranes and restoration to the state as directed by BHEL shall be the contractor's responsibility.
c)	In case the BHEL cranes are not covered under AMC of BHEL, then the day-to-day upkeep and running maintenance like filling / topping up of lubricants, changing filters, etc including repair of self starter and dynamo of these cranes shall be the responsibility of the contractor. If on checking it is found that the same is not followed, BHEL will exercise its right to get the job/works done at the risk and cost of contractor. In case BHEL cranes are covered under AMC awarded by BHEL, then the day-to-day upkeep and running maintenance as described above are excluded from scope. However any additional helpers if any required during Preventive/Breakdown Maintenance, Assembly/disassembly shall be provided by contractor at no extra cost. BHEL may also provide cranes through crane hiring agencies in which case the day-to-day upkeep and running maintenance shall be excluded from scope of contractor.
d)	Minor consumables like cotton cloth, cotton waste, etc is to be supplied by Contractor. All spares and lubricants/grease is excluded from scope. Contractor to give the requirements of these items well in advance in case the cranes provided by BHEL are BHEL owned cranes.
e)	Unless otherwise specified, trained operators for BHEL owned cranes shall be provided by the contractor. These operators should possess valid license for heavy vehicle.
f)	BHEL cranes will be withdrawn for regular and capital maintenance as per the respective schedule of maintenance. As far as possible such schedules will be intimated to the contractor in advance and may be adjusted depending on the work

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	requirements at site. However no claim whatsoever will be entertained on account of non-availability of cranes.
g)	Where the services of the cranes provided by BHEL are to be shared by other agencies/ contractors of BHEL, the contractor's responsibilities defined above will also be apportioned accordingly to the beneficiary agency. Working arrangements in this regard will be done at site by BHEL engineer and in any case his decision shall be final and binding.
h)	Major breakdowns will be attended to by BHEL. However, in case of breakdowns or damages due to negligence of the contractor, the complete service/repair charges including cost of spares shall be to the account of the contractor, along with BHEL overheads.
4.2.2.17	Obligations in respect of Construction Lift/Elevators provided by BHEL
a)	The total erection including commissioning, maintenance, statutory clearances shall be included in scope of work. Supervision by the original equipment supplier or their authorized agency shall be arranged for by BHEL, in case found necessary.
b)	All day to day and routine maintenance and checking is to be carried out by the contractor as per the recommendations of the supplier. He should periodically check the brakes and carry out the all works to ensure the safety of all those using the lift/elevator. BHEL shall arrange spares required for upkeep of Construction lift/elevator
c)	The construction lift/elevator should never be overloaded as this can lead to serious accidents. Ensuring all safety aspects in operation of the lift shall be the responsibility of the contractor. Erection of all the required number of landing platforms is included in scope. Landing platforms are to be provided with proper barricades and hand railings.
d)	After completion of contractual scope of work or as per BHEL advice, the temporary elevator/lift shall be dismantled and handed over to BHEL neatly identified/tagged. Temporary structures/platforms etc erected for the elevators/lifts are also to be dismantled and materials to be returned to stores as applicable. The construction and dismantling of the foundations required for the construction/elevator lifts is included in the scope of the contractor.

SPECIAL CONDITIONS OF CONTRACT (SCC)
**Chapter – V : Responsibilities of Contractor in respect of Labour,
Supervisory Staff, etc.**

5.0	RESPONSIBILITIES OF CONTRACTOR IN RESPECT OF LABOUR, SUPERVISORY STAFF, ETC.
5.1	Refer relevant clauses of General Conditions of Contract (GCC) also in this regard
5.2	The contractor shall deploy all the necessary skilled/semiskilled/ unskilled labour including highly skilled workmen etc. These workmen should have previous experience on similar job. They shall hold valid certificates wherever necessary. BHEL reserves the right to insist on removal of any employee of the contractor at any time if he is found to be unsuitable and the contractor shall forthwith remove him.
5.3	Contractor shall also comply with the requirements of local authorities/ project authorities calling for police verification of antecedents of the workmen, staff etc.
5.4	It is the responsibility of the contractor to engage his workmen in shifts and or on overtime basis for achieving the targets set by BHEL. This target may be set to suit BHEL's commitments to its customer or to advance date of completion of events or due to other reasons. The decision of BHEL in regard to setting the erection and commissioning targets will be final and binding on the contractor.
5.5	Contractor shall provide at different elevation suitable arrangement for urinal and drinking water facility with necessary plumbing & disposal arrangement including construction of septic tank. These installations shall be maintained in hygienic condition at all times.
5.6	The Contractor in the event of engaging 20 or more workmen, shall obtain Independent license under the Contract labour (Regulation and Abolition) Act 1970 from the concerned authorities based on Form-V issued by the Principal Employer/Customer. In order to issue Form-V by Customer, Contractor shall fulfill all Statutory requirements like Insurance Policy, PF Code/PF Account number etc as per the requirement of BHEL/Customer
5.7	Contractor shall deduct the necessary amount towards Provident Fund and contribute equal amount as per Government of India laws. This amount will be deposited regularly to the provident Fund Commissioner. BHEL/Customer may insist for submission of the account code duly certified by PF Commissioner
5.8	Contractor may also be required to comply with provisions of ESI Act in vogue if applicable and submit evidence to BHEL.
5.9	BHEL / customer may insist for witnessing the regular payment to the labour. They may also like to verify the relevant records for compliance with statutory

SPECIAL CONDITIONS OF CONTRACT (SCC)
**Chapter – V : Responsibilities of Contractor in respect of Labour,
Supervisory Staff, etc.**

	requirements. Contractor shall enable such facilities to BHEL / Customer.
5.10	Contractor shall deploy only qualified and experienced engineers/ supervisors. They shall have professional approach in executing the work.
5.11	The contractor's supervisory staff shall execute the work in the most professional manner in the stipulated time. Accuracy of work and aesthetic finish are essential part of this contract. They shall be responsible to ensure that the assembly and workmanship conform to dimensions and tolerances given in the drawings/instructions given by BHEL engineer from time to time.
5.12	The supervisory staff employed by the contractor shall ensure proper outturn of work and discipline on the part of the labour put on the job by the contractor. Also in general they should see that the works are carried out in a safe and proper manner and in coordination with other labour and staff employed directly by BHEL or other contractors of BHEL or BHEL's client.
5.13	It is the responsibility of the contractor to arrange gate pass for all his employees, T&P etc for entering the project premises. Necessary coordination with customer officials is the responsibility of the contractor. Contractor to follow all the procedures laid down by the customer for making gate passes. Where permitted, by customer / BHEL, to work beyond normal working hours, the contractor shall arrange necessary work permits for working beyond normal working hours.
5.14	The actual deployment will of Labour and Engineer/supervision staff shall be so as to satisfy the erection and commissioning targets set by BHEL. If at any time, it is found that the contractor is not in a position to deploy the required engineers/supervisors/workmen due to any reason, BHEL shall have the option to make alternate arrangements at the contractor's risk and cost. The expenditure incurred along with BHEL overheads thereon shall be recovered from the contractor
5.15	Contractor shall not deploy women labour at night.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

6.0	MATERIAL HANDLING, STORAGE AND PRESERVATION ETC
6.1	MATERIAL HANDLING AND STORAGE
6.1.1	All the equipments/materials furnished under this contract shall be received from the project stores, sheds / storage yards and transported to pre assembly area / erection site and stored in the storage spaces in a manner so that they are easily retrievable till the contractor erects them. While drawing/lifting material from BHEL / customer stores, the contractor shall ensure that the balance / other materials are stacked back immediately. No claim is admissible on this account
6.1.2	While BHEL will endeavor to store / stack / identify materials properly in their open / close / semi closed / tarpaulins covered storage yard / shed, it shall be contractor's responsibility to assist BHEL in identifying materials well in time for erection. They should take the delivery of the same, following the procedure indicated by BHEL, and transport the material safely to pre-assembly yard / erection site in time, according to program.
6.1.3	The contractor shall take delivery of components, equipment / consumables from storage area after getting the approval of BHEL Engineer on standard indent forms.
6.1.4	The contractor shall identify and deploy necessary Engineers / supervisors / workmen for the above work in sufficient number as may be needed by BHEL, for areas covering their scope.
6.1.5	All the equipment shall be handled very carefully to prevent any damage or loss. No untested wire ropes / slings etc. shall be used for unloading / handling. The equipment shall be properly protected to prevent damage either to the equipment or to the floor where they are stored. The equipment from the stores shall be moved to the actual location at the appropriate time so as to avoid damage of such equipment at site.
6.1.6	Contractor shall ensure that while lifting slings shall be put over the points indicated on the equipment or as indicated in the manufacturer's drawings. Slings / shackles of proper size shall be used for all lifting and rigging purposes. All care shall be taken to safe guard the equipment against any damage. Dragging of piping / valves should be avoided. In case of any damage the cost shall be covered from the contractor.
6.1.7	Approach road conditions from the stores / yards to the erection site may not

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

	be equipped and ideal for smooth transportation of the equipment. Contractor may have to be adequately prepared to transport the materials under the above circumstances without any extra cost. . The contractor may familiar himself with soil conditions at site.
6.1.8	Contractor shall be responsible for examining all the plant and materials issued to him and notify the Engineer immediately of any damage, shortage, discrepancy etc before they are moved out of the stores / storage area. The contractor shall be solely responsible for any shortages or damages in transit, handling, storage and erection of the equipment once received by him. As the erection work will be spread in different areas / locations of the project, contractor has to arrange sufficient number of watch / ward personal to avoid any pilferage of material
6.1.9	The contractor shall maintain an accurate and exhaustive record-detailing out the list of all equipment received by him for the purpose of erection and keep such record open for the inspection of the engineer at any time.
6.1.10	All the material in the custody of contractor and stored in the open or dusty locations must be covered with suitable weather proof / fire retardant covering material wherever applicable and shall be blocked up on raised level above ground. All covering materials including blocks and sleeper shall be arranged by the contractor at his cost.
6.1.11	If the material belonging to the contractor are stored in area other than those earmarked for his operation the engineer will have the right to get it moved to the area earmarked for the contractor at the contractors risk and cost.
6.1.12	The contractor shall be responsible for making suitable indoor storage facilities to store all equipment (drawn by the contractor from BHEL / customer stores), which require indoor storage till the time of their installation. The Engineer will direct the contractor in this regard, which item in his opinion will require indoor storage, and the contractor shall comply with Engineer's decision.
6.1.13	The contractor shall ensure that all surplus / damaged / scrap / unused material, packing wood / containers/ special transporting frames etc are returned to BHEL at a place in project area identified by the Engineer. The contractor will maintain an account for all items received and returned to BHEL. Any shortage in returning such items shall be chargeable to the contractor except allowable wastage for packing wood only.
6.1.14	The contractor shall hand over all parts / materials remaining extra over the normal requirement with proper identification tags to the stores as directed by

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

	the concerned BHEL engineer.
6.1.15	The contractor shall ensure that all the packing materials and protective devices installed on equipment during transit and storage are removed before installation.
6.1.16	It shall be the responsibility of the contractor to keep the work / storage areas in neat, tidy and working conditions. All surplus/unusable packing and other materials shall be removed and deposited at location(s) specified by BHEL within the project premises. If required weighing of the same within the project premises will have to be carried out.
6.2	PRESERVATION OF COMPONENTS
6.2.1	After taking delivery from BHEL / customer's stores, plant materials storage shall be subjected to the following protection besides other provisions indicated in these specifications elsewhere.
6.2.1.1	Items stored outdoors shall be stacked up at least six inches (6") off the ground. Items should not be stored in a low lying area where water logging is a possibility. Contractor should have sufficient numbers of wooden / concrete / steel sleepers for the job.
6.2.1.2	Motors, valves, electrical equipment, control equipment and instruments, and special or precision items requiring special care, etc shall be stored indoors. Motor windings shall be kept dry by use of external heat or space heaters.
6.2.1.3	Bearings and other wearing surfaces of plant materials shall be protected against corrosion and kept clean and should be regularly monitored.
6.2.1.4	Insulation materials shall be stored indoors or otherwise protected against getting wet/ damaged, using suitable measures and should be protected from direct rain.
6.2.2	It shall be the responsibility of the contractor to apply preservatives / touch up paints (primer) on equipment handled and erected by him till such time of final painting. It shall be contractor's responsibility to arrange for required paints (primer), thinners, labour, scaffolding materials, cleaning materials like wire brush, emery sheets, etc, cleaning of surface and provide one coat of preservatives / paints (primer) from time to time as decided by BHEL engineer. The accepted rate shall include this work also. It is to be noted that such painting may have to be done as and when required till such time the final painting is carried out.
6.2.3	The contractor shall effectively protect the finished work from action of weather

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter – VI: Material Handling, Storage & preservation

	and from damage or defacement and shall cover the finished parts then and there for their protection.
6.2.4	Any failure on the part of contractor to carry out works according to above clauses will entail BHEL to carry out the job from any other party and recover the cost from contractor.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VII: Drawings and documents

7.0	DRAWINGS AND DOCUMENTS
7.1	The detailed drawings, specifications available with BHEL engineers will be made available to the contractor during execution of work at site. The contractor will also ensure availability of all drawings / documents at work place.
7.2	Necessary drawings to carry out the erection work will be furnished to the contractor by BHEL on loan, which shall be returned to BHEL Engineer at site after completion of work. Contractor shall ensure safe storage and quick retrieval of these documents.
7.3	The contractor shall maintain a record of all drawings and documents available with him in a register as per format given by BHEL Engineer. Contractor shall ensure use of pertinent drawings / data / documents and removal of obsolete ones from work place and returning to BHEL.
7.4	The data furnished in various annexure enclosed with this tender specification are only approximate and for guidance. However, the change in the design and in the quantity may occur as is usual in any such large scale of work. The contractors quoted rates shall be inclusive of the above factor
7.5	Should any error or ambiguity be discovered in the specification or information the contractor shall forthwith bring the same to the notice of BHEL before commencement of work. BHEL's interpretation in such cases shall be final and binding on the contractor.
7.6	Deviation from design dimensions should not exceed permissible limit. The contractor shall not correct or alter any dimension / details, without specific approval of BHEL.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

8.0	INSPECTION AND QUALITY
8.1	Inspection, Quality Assurance, Quality Control
8.1.1	Preparation of quality assurance log sheets and protocols with customer/ consultants/statutory authority, welding logs, NDE records, testing & calibration records and other quality control and quality assurance documentation as per BHEL engineer's instructions, is within the scope of work/specification. These records shall be submitted to BHEL/customer for approval from time to time.
8.1.2	The protocols between contractor and customer/ BHEL shall be made prior to installation for correctness of foundations, materials, procedures, at each stage of installation, generally as per the requirement of customer/ BHEL. This is necessary to ensure elimination of errors or keeping them within tolerable limits and to avoid accumulation and multiplication of errors.
8.1.3	A daily log book should be maintained by every supervisor/engineer of contractor on the job in duplicate (one for BHEL and one for contractor) for detailing and incorporating alignment/clearance / centering / leveling readings and inspection details of various equipments etc. High pressure welding details like serial number of weld joints, welders name, date of welding, details of repair, heat treatment etc. will be documented in welding log as per BHEL Engineer's instructions. Record of radiography containing details like serial number of weld joints, date of radiography, repairs, if any, re-shots etc shall also be maintained as per BHEL Engineer's instructions. Record of heat treatments performed shall be maintained as prescribed by BHEL
8.1.4	The performance of welders will be reviewed from time to time as per the BHEL standards. Welders' performance record shall be furnished periodically furnished for scrutiny of BHEL's Engineer. Corrective action as informed by BHEL shall be taken in respect of those welders not conforming to these standards. This may include removal/ discontinuance of concerned welder(s). Contractor shall arrange for the alternate welders immediately
8.1.5	All the welders shall carry identity cards as per the proforma prescribed by BHEL/Customer/Consultant. Only welders duly authorized by

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	BHEL/customer/consultant shall be engaged on the work.
8.1.6	Contractor shall provide all the Measuring Monitoring Equipments (MMEs) required for completion of the work satisfactorily. These MMEs shall be of brand, quality and accuracy specified by BHEL Engineer and should have necessary calibration and other certificates as per the requirement of BHEL Engineer. Decision of BHEL Engineer regarding acceptance or otherwise of the measuring instruments/gauges/tools for the work under this specification, is final and binding on the contractor. BHEL may give an indicative list of MMEs required for this work and to be made available by the contractor. The list will be reviewed by BHEL and the contractor shall meet any augmentation needed wherever required.
8.1.7	It is the responsibility of the contractor to prove the accuracy of the testing/measuring/calibrating equipments brought by him based on the periodicity of calibration as called for in the BHEL's quality assurance standards/BHEL Engineer's instructions.
8.1.8	Any re-laying or re-termination of cables/re-erection of instruments/recalibration of instruments etc. required due to contractor's mistake or design requirement and found at any stage inspection, shall be carried out by the contractor at no extra cost.
8.1.9	BHEL, Power Sector Regions (PSNR/PSER/PSWR/PSSR) have already been accredited with ISO 9001 certification and as such this work is subject to various audits to meet ISO 9001 requirements. One particular aspect which needs special mention is about arrangement of calibration of instruments by the contractor. Contractor shall ensure deployment of reliable and calibrated MMEs (Measuring and Monitoring Equipments). The MMEs shall have test / calibration certificates from authorised / Government approved / Accredited agencies traceable to National / International Standards. Re-testing / re-calibration shall also be arranged at regular intervals during the period of use as advised by BHEL Engineer within the contract price. The contractor will also have alternate arrangements for such MMEs so that work does not suffer when the particular equipment / instrument is sent for calibration. Also if any MMEs not found fit for use, BHEL shall have the right to stop the use of such item and instruct the contractor to deploy proper item and recall ie repeat the readings taken by that instrument, failing which BHEL may deploy MME and retake the readings at Contractor's cost.
8.1.10	Re-work necessitated on account of use of invalid MMEs shall be entirely to the

Bharat Heavy Electricals Limited

Power Sector – Eastern Region, Kolkata

VOLUME-ID

TENDER NO. PSER:SCT:NKP-C1999:19

PAGE 22 OF 47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	contractor's account. He shall be responsible to take all corrective actions, including resource augmentation if any, as specified by BHEL to make-up for the loss of time.
8.1.11	In the courses of erection, it may become necessary to carry repeated checks of the work with instruments recently calibrated, re-calibrated. BHEL may counter/ finally check the measurements with their own MMEs. Contractor shall render all assistance in conduct of such counter/final measurements.
8.1.12	Total Quality is the watchword of the work and Contractor shall strive to achieve the Quality Standards, procedures laid down by BHEL. He shall follow all the instructions as per BHEL drawings and Quality Standards.
8.2	Stage Inspection By FES/QA Engineers
8.2.1	Apart from day-to-day inspection by BHEL Engineers stationed at Site and Customer's Engineers, stage inspection of equipments under erection and commissioning at various stages shall also be conducted by teams of Engineers from Field Engineering Services of BHEL's Manufacturing Units, Quality Assurance teams from Field Quality Assurance, Unit/Factory Quality Assurance and Commissioning Engineers from Technical Services etc. Contractor shall arrange all labour, tools and tackles etc along with proper access for such stage inspections free of cost.
8.2.2	Any modifications suggested by BHEL FES and QA Engineers' team shall be carried out. Claims of contractor, if any, shall be dealt as per Section 13, and provided such modifications have not arisen for reasons attributable to the contractor.
8.3	Statutory Inspection of Work
8.3.1	The work to be executed under these specifications has to be offered for inspection, at appropriate stages of work completion, to various statutory authorities for compliance with applicable regulations. The work related statutory inspections, though not limited to, are as under: 1) Inspectorate of Steam Boilers and Smoke Nuisance 2) Electrical Inspector 3) Factory Inspector, Labour Commissioner, PF Commissioner and other authority connected to this project work

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	The scope includes getting the approvals from the statutory authorities, which includes arranging for inspection visits of statutory authority periodically as per BHEL Engineer's instructions, arranging materials for ground inspection, taking rub outs for the pressure parts to be offered for inspection, submitting co-related inspection reports, documents, radiographs etc and following up the matter with them. Contractor shall also make all arrangements for offering the Products / Systems for inspection at location, as applicable, to the concerned authority.
8.3.2	Contractor should be qualified to execute pressure parts & piping work coming under the purview of IBR, for which he should register himself with CIB of state concerned. contractor also should be aware of the latest IBR regulations and Electricity Act, including the amendments thereof.
8.3.3	Contractor shall comply with 'Qualification Tests for welders engaged in welding of Boilers and Steam Pipes under Construction, Erection and Fabrication at Site in India and in repairing Boilers and steam pipes by welding' in line with Chapter XIII of Indian Boiler Regulations-1950, for testing his welders / men / workers, including all associated fees, procedures, required instruments and equipments and their calibration there of. It shall be contractor's responsibility to obtain approval of Statutory Authorities, wherever applicable, for the conducting of any work which comes under the purview of these authorities, at his cost.
8.3.4	The following fees shall be excluded from scope of Contractor: 1. Registration Fee as per Regulation 385 of Chapter IX of Indian Boiler Regulations-1950 2. Fees for inspection of Boiler at the site of Construction as per Regulation 395 A, sl no 4 of Chapter IX of Indian Boiler Regulations-1950 However all other fees like visit fees charged by the Boiler Inspector and other arrangements for his visit or visits till satisfactory completion of work, shall be included in scope of Contractor
8.4	The Quality Management System of BHEL, Power Sector Regions (PSNR/PSER/PSWR/PSSR) have already been certified and accredited under ISO 9002 standards in this regard. The basic philosophy of the Quality Management System is to define the organizational responsibility, work as per

Bharat Heavy Electricals Limited Power Sector – Eastern Region, Kolkata		
VOLUME-ID	TENDER NO. PSER:SCT:NKP-C1999:19	PAGE24OF47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	documented procedures, verify the output with respect to acceptance norms, identify the non-conforming product/ procedure and take corrective action for removal of non-conformance specifying the steps for avoiding recurrence of such non-conformities, & maintain the relevant quality records. The nonconformities are to be identified through the conduct of periodical audit of implementation of quality systems at various locations/stages of work. Suppliers/vendors of various products/services contributing in the work are also considered as part of the quality management system. .as such the contractor is expected not only to conform to the quality management system of BHEL but also it is desirable that they themselves are accredited under any quality management system standard.
8.5	Field Quality Assurance
8.5.1	Contractor shall carry out all activities conforming to the approved Field Quality Plan (FQP) as revised from time to time. Total quality shall be the watchword of the work and contractor shall strive to achieve the quality standards, procedures laid down by BHEL. He shall follow all the instructions as per BHEL drawings and quality standards. Contractor shall provide the services of quality assurance engineer as per the relevant clauses.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.0	OCCUPATIONAL HEALTH, SAFETY & ENVIRONMENT MANAGEMENT/ QUALITY ASSURANCE PROGRAMME: BHEL, Power Sector Regions (PSNR/ER/WR/SR) are each certified for ISO 9001. Quality of work to customer's satisfaction and fulfillment of system requirements are the essence of ISO 9001 certification. BHEL, PS Regions have HSE certification (ISO 14001 & OHSAS 18001) and therefore Contractor also shall organise/ plan/ perform all their activities to meet with the applicable requirements of these standards.
9.1	HSE (Health, safety & Environment): Contractor will comply with HSE (Health, safety & Environment) requirements of BHEL. HSE requirements in brief, are given below :-
9.1.1	Contractor will nominate one of their qualified and experienced employees as Safety Officer, who will be responsible for all HSE related issues of contractors work area. Safety Officer will have authority to stop any activity, in case he observes that the activity is not being carried out in safe manner. He will conduct surprise inspection as well as periodic inspection/drill (at least once in a month) and submit such reports to BHEL. He will conduct periodic meetings with supervisors of different working groups and explain HSE issues and use of PPEs to them. Reports of such meetings will be submitted to BHEL. Contractor will develop suitable work procedures based upon HSE guidelines and OCPs and implement it. Such work procedures will consist of Area of work, T&P Details, Work Procedure, PPE requirements etc. Please refer Schedule VIII of BOCW Rules for number of safety officers, qualification, duties etc. Contractor should highlight the requirement of safety to staff and labour through daily tool box meeting before start of the days job. Contractor to also submit monthly safety reports as per the format/procedure of BHEL.
9.1.2	The contractor shall arrange induction and regular health check of their employees as per schedule VII of BOCW rules by aregistered medical practitioner. The contractor shall take special care of the employees affected with occupational diseases under rule 230 and schedule II of BOCW Rules. The employees not meeting the fitness requirement should not be engaged for such job
9.1.3	Following personnel protective equipments (PPEs), in adequate numbers, will

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	be made available at site & their regular use by all concerned will be ensured :-
	- HELMET
	- SAFETY GOGGLES & WELDING FACE SHIELDS
	- SAFETY BELTS AND PROTECTIVE NET FOR WORKING AT HEIGHT
	- SAFETY SHOES
	- EAR PLUG
	- ANY OTHER SAFETY EQUIPMENT REQUIRED FOR SAFE COMPLETION OF THE WORK
	Contractor to also submit monthly reports on above as per the format/procedure of BHEL.
9.1.4	Providing appropriate First Aid facilities for prompt treatment of injuries and illness at work place. Arranging training to contractor workmen/ employees for giving first aid.
9.1.5	Arranging ambulance in case of any emergency situation .
9.1.6	Identification of nearest hospital and health check-up of workmen/employees
9.1.7	Providing filtered drinking water at work place in cool container.
9.1.8	Providing Canteen, Rest Room, Washing facilities to the contracted employees as per provisions of Contract Labour Regulation Act 1970 (Chapter V).
9.1.9	Providing appropriate fire fighting equipment at designated work place and nominate a fire officer/warden adequately trained for his job.
9.1.10	Identification of nearest fire station and display contact telephone nos. / person's name around work places for cases of emergencies .
9.1.11	Providing adequate no. of 24 V sources and ensure that no hand lamps are operating at voltage level above 24 Volts.
9.1.12	Fulfilling safety requirements at all power tapping points.
9.1.13	Red & White caution tape of proper width(1.5 to 2 inch) to be used for cordoning unsafe area such as open trench, excavation area etc.
9.1.14	Providing contractors company logo on cloths /uniform/ proper identity cards with photographs, for correct identification of people working at project site .
9.1.15	High/ Low pressure welders to be identified with separate colourclothings. No welders will be deployed without passing appropriate tests and holding valid welding certificates. Approved welding procedure should be displayed at work place.
9.1.16	Displaying safe handling procedures for all chemicals such as lube oil, acid, alkali, sealing compounds etc , at work place .

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.1.17	All scaffolding/ platforms should be made from materials of appropriate quality/grade so that these are safe for use. It should be certified/declared safe for use by an experienced contractor person, before any scaffolding/platform is used. Please refer IS:3696 part 1&2 and 4014 part 1 & 2
9.1.18	All T&Ps/ MMEs should be of reputed brand/appropriate quality & must have valid test/calibration certificates bearing endorsement from competent authority of BHEL.. Contractor to also submit monthly reports of T&Ps deployed and validity test certificates to BHEL safety Officer as per the format/procedure of BHEL.
9.1.19	Ensure that the regulatory requirement of excessive weight limit (to carry/lift/ move weights beyond prescribed limits) for male and female workers are complied with.
9.1.20	Safety slogan, Safety/ Caution boards , wherever required to be displayed in consultation with BHEL.
9.1.21	Take suitable measures for waste management and environment related laws/legislation as a part of normal construction activities. Compliance with the legal requirements on storage/ disposal of paint drums (including the empty ones), Lubricant containers, Chemical Containers, and transportation and storage of hazardous chemicals will be strictly maintained. Ensure proper cleanliness of work place, housekeeping and waste management (including proper waste disposal) on daily basis.
9.1.22	It is imperative on the part of the contractor to join and effectively contribute in joint measures such as tree plantation, environment protection, contributing towards social upliftment, conversion of packing woods to school furniture, keeping good relation with local populace etc.
9.1.23	The contractor shall carry out periodic air and water quality check and illumination level checking in his area of work place and take suitable control measure.
9.1.24	The Contractor is required to provide proper safety net systems (IS-11057) where ever the hazard of fall from height is present as per instruction of BHEL Engineer. The safety nets shall be fire resistant, duly tested and shall be of ISI Mark and the nets shall be located as per site requirements to arrest or to reduce the consequences of a possible fall of persons working at different heights.
9.1.25	All applicable OCPs (Operational control procedures) will be followed by contractor as per BHEL instructions. This will be done as part of normal scope of work. List of such OCPs is given below . In case any other OCP is found to

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	be applicable during the execution of work at site, then contractor will follow this as well, within quoted rate. These OCPs (applicable ones) will be made available to contractor during work execution at site. However for reference purpose, these are kept with Safety Officer of BHEL at the Power Sector Regional HQ, or available in downloadable format in the website, which may be refereed by contractor, if they so desire.
■	OCP for safe handling of chemicals
■	OCP for Electrical safety
■	OCP for energy conservation
■	OCP for safe welding and gas cutting operation
■	OCP for fire safety
■	OCP for safety in use of hand tools
■	OCP for first aid
■	OCP for food safety at canteen
■	OCP for safety in use of cranes
■	OCP for storage and handing of gas cylinders
■	OCP for manual arc welding
■	OCP for safe use of helmets
■	OCP for good house keeping
■	OCP for working at height
■	OCP for safe excavation
■	OCP for safe filling of Hydrogen in cylinder
■	OCP for illumination
■	OCP for handling and erection of heavy metals
■	OCP for safe acid cleaning
■	OCP for safe alkali boil out
■	OCP for safe oil flushing
■	OCP for steam blowing
■	OCP for safe working in confined area
■	OCP for safe operation of passenger lift, material hoists & cages
■	OCP for Vehicle maintenance
■	OCP for safe radiography
■	OCP for waste disposal
■	OCP for working at night
■	OCP for blasting
■	OCP for DG Set
■	OCP for handling & storage of mineral wool

Bharat Heavy Electricals Limited Power Sector – Eastern Region, Kolkata		
VOLUME-ID	TENDER NO. PSER:SCT:NKP-C1999:19	PAGE29OF47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	■ OCP for drilling, reaming and grinding(machining) etc. ■ OCP for hydraulic test ■ OCP for spray insulation ■ OCP for trial run of rotary equipment ■ OCP for stress relieving ■ OCP for material preservation ■ OCP for cable laying/tray work ■ OCP for electrical maintenance ■ OCP for transformer charging ■ OCP for safe handling of battery system ■ OCP for computer operation ■ OCP for storage in open yard ■ OCP for sanitary maintenance ■ OCP for batching ■ OCP for piling rig operation ■ OCP for gas distribution test ■ OCP for cleaning of hotwell / deaerator ■ OCP for electro-resistance heating ■ OCP for compressor operation ■ OCP for O&M of control of AC plant & system ■ OCP for air compressor ■ OCP for passivation ■ OCP for Safe EDTA Cleaning ■ OCP for Safe Chemical cleaning of Pre boiler system ■ OCP for Safe Boiler Light up ■ OCP for Safe Rolling and Synchronisation ■ OCP for Safe Loading of Unit
9.2	SAFETY AND CLEANLINESS : The contractor shall take all necessary safety precautions and arrange for appropriate appliances as per discretion of BHEL or its authorised officials (Site Construction Manager) to prevent loss of human lives, injuries, to personnel engaged and damage to property. Before commencing the work, the contractor shall submit a "Safety Plan" to the above authorised BHEL official and obtain approval on the same. The safety plan shall indicate in detail the measures that would be taken by the contractor to ensure safety of men, equipment, materials and environment during execution of the work. This will also include an organization structure, role and responsibilities of the concerned key

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	personnel, the safety practices that will be followed, PPEs deployed, plan for handling critical activities and emergencies.
9.3	If the contractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instructions issued by the authorised BHEL official, BHEL shall have the right to take corrective steps at the risk and cost of the contractor.
9.4	During the course of construction, alternation or repairs, scrap with protruding nail, sharp edge etc and all other debris shall be kept clean from working areas, passage, ways and stairs in and around site.
9.5	Combustible scrap and debris shall be removed at regular intervals during the course of execution. Safe means shall be provided to facilitate such removal. The combustible scrap should be stored in safe place away from the plant materials to avoid fire accidents. The area shall be chosen in consultation with the Engineer and to be cordoned off.
9.6	Rigging equipment for materials handling shall be inspected prior to use in each shift and as necessary during its use to ensure that it is safe. Defective rigging equipment will be removed from service.
9.7	Rigging equipment shall not be loaded in excess of its recommended safe working load. Rigging equipment, when not in use, shall be removed from the original work area so as not to present a hazard to employees.
9.8	Contractor shall notify the engineer, of his intention to bring on to site any equipment or any container, with liquid or gaseous fuel or other substance which may create a hazard. The Engineer shall have the right to prescribe the condition under which such equipment or container may be handled and used during the performance of the works and the contractor shall strictly adhere to such instructions. The Engineer shall have the right to inspect any construction tool and to forbid its use, if in his opinion it is unsafe. No claim due to such prohibition will be entertained.
9.9	Where it is necessary to provide and/or store petroleum products or petroleum mixture & explosives, the contractor shall be responsible for carrying out such provision / storage in accordance with the rules & regulations laid down in the relevant petroleum act, explosive act and petroleum and carbide of calcium manual, published by the chief inspector of explosives of India. All such storage shall have prior approval if necessary from the chief inspector of explosives or any other statutory authority. The contractor shall be responsible for obtaining

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	the same.
9.10	Cylinders shall be moved by tilting and rolling them on their bottom edges. They shall not be intentionally dragged, struck or permitted to strike each other violently.
9.11	When cylinders are transported by powered vehicle they shall be secured in a vertical position.
9.12	All workmen of the contractor working on construction area shall wear safety shoes, hand gloves, safety helmets and safety belt as applicable. The contractor shall provide to its workforce and ensure the use of following personnel protective equipment as found necessary and as directed by BHEL.
9.12.1	Safety Helmets conforming to IS-2925 : 1984
9.12.2	Safety Belts conforming to IS-3521:1983
9.12.3	Safety Shoes conforming to IS-1989 : 1978
9.12.4	Eye and face protection devices conforming to IS – 1179:1967, IS 5983:1980, IS 8521 Part 1:1977, IS 8521 Part 2: 1994.
9.12.5	Hand and body protection devices conforming to IS 4770:1991 and IS- 6994 : Part 1: 1973, IS – 8619 : 1977
9.12.6	Ear protection IS-9167:1979
9.12.7	Respiratory Protective Devices as per IS-9473:2002, i4746:1999 and 14166:1994
9.13	The contractor shall insure his workmen against all accidents and the policy shall be presented to BHEL Engineer on demand. Other wise, BHEL will arrange the same and the expenditure towards this will be debited to the contractor. In case of a fatal or disabling injury accident to any person at construction site due to lapses by the contractor, the victim and/or his/her dependants shall be compensated by the contractor as per statutory requirements. However, if considered necessary BHEL shall have the right to impose appropriate financial penalty on contractor and recover the same from payments due to the contractor for suitably compensating the victim and/or his/her dependence before imposing any such penalty. Appropriate enquiry shall be held by BHEL giving opportunity to the contractor for presenting his case. Above safety conditions are not exhaustive but gives an idea for the contractor and contractor shall adhere to all safety precaution given by the

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	Engineer at site.
9.14	The contractor shall arrange at his cost adequate lighting facilities e.g. flood lighting, hand lamps, area lighting etc. at various levels for safe and proper working operations during night hours at the work spot as well as at the pre-assembly area.
9.15	The contractor shall be responsible for provision of all the safety notices and safety equipment as enjoined on him by the application of relevant statutory regulation / provisions and/or as called upon by BHEL from time to time. He shall be held responsible for any violation of statutory regulations (local, state or central) and BHEL instruction that may endanger safety of men, equipment and material.
9.16	The contractor shall provide temporary fencing wherever required as a safety measure against accident and damage to properties. Suitable caution notices shall be displayed where access to any part is found to be unsafe and hazardous.
9.17	Contractor shall ensure safety of all the workmen, material and equipment either belonging to him or to others working at site. He shall observe safety rules and codes applied by BHEL without exception.
9.18	It will be the responsibility of the contractor to ensure safe lifting of the equipment, taking due precaution to avoid any accident and damage to other equipment and personnel. All requisite tests and inspection of handling equipment, tools & tackle shall be periodically done by the contractor by engaging only the COMPETENT PERSONS as per law. Defective equipment or uncertified shall be removed from service. Any equipment shall not be loaded in excess of its recommended safe working load.
9.19	The contractor shall provide necessary first aid facilities as per schedule III. In addition, ambulance facilities, OHC and CMO as per schedule IV, V, X and XI of BOCW Rules as applicable for all his employees, representatives and workmen at site and BHEL shall have no obligation in this regard. The first aid boxes should be placed at various elevations so as to make them available within the reach and at the quickest possible time. The contractor should conduct periodical first –aid classes to keep his supervisor and Engineers properly trained for attending to any emergency.
9.20	Training

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.20.1	The contractor shall arrange induction safety training for all employees before assigning work. In addition, awareness programme, mock drill at regular intervals and daily tool box meetings shall be arranged. Monthly report of the above to be given to BHEL safety Officer as per prescribed BHEL formats
9.20.2	All the contractor's supervisory personnel and sufficient number of workers shall be trained for fire protection systems. Enough number of such trained personnel must be available during the tenure of contract. Contractor should nominate his supervisor to coordinate and implement the safety measures.
9.21	Contractor shall provide enough fire protecting equipment of the types and numbers at his office, stores, temporary structure in labour colony etc. Such fire protection equipment shall be easy and kept open at all times. The fire extinguishers shall be properly refilled and kept ready which should be certified at periodic intervals. The date of changing should be marked on the Cylinders. All other fire safety measures as laid down in the "codes for fire safety at construction site" issued by safety coordinator of BHEL shall be followed. Non-compliance of the above requirement under fire protection shall in no way relieve the contractor of any of his responsibility and liabilities to fire accident occurring either to his materials or equipment or those of others. Emergency contacts nos must be displayed at prominent locations
9.22	The contractor shall at his cost, remove from vicinity of work at least once each day all combustible waste, scrap, painting materials, rubbish, unused or other materials and deposit them in places specified by BHEL to keep the work site clear and tidy. Use of undercoated canvas paper, corrugated paper, fabricated carton, plastic or other flammable materials shall be restricted to the minimum and promptly removed.
9.23	The contractor shall not use any hand lamp energized by Electric power with supply voltage of more than 24 volts in confined spaces like inside water boxes, turbine casings, condensers etc.
9.24	All portable electric tools used by the contractor shall have safe plugging system to source of power and be appropriately earthed. Only electricians licensed by appropriate statutory authority shall be employed by the contractor to carry out all types of electrical works. Details of earth resource and their test date to be given to BHEL safety officer as per the prescribed formats of BHEL
9.25	In case of any delay in completion of a job due to mishaps attributable to lapses by the contractor, BHEL shall have the right to recover cost of such delay from

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	the payments due to the contractor, after notifying the contractor suitably.
9.26	Valve protection caps shall be kept in place and secured.
9.27	The contractor shall be responsible for the safe storage and handling of his radio-active sources as per BARC rules and regulations.
9.28	Tarpaulin being inflammable should not be used (instead, only non infusible covering materials shall be used) as protective cover while preheating, welding, stress relieving etc. at site.
9.29	If the contractor fails to improve the standards of safety in its operation to the satisfaction of BHEL after being given reasonable opportunity to do so and/or if the contractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instruction regarding safety issued by BHEL, BHEL shall have the right to take corrective steps at the risk and cost of the contractor after giving a notice of not less than 7 days indicating the steps that would be taken by BHEL.
9.30	If the contractor succeeds in carrying out its job in time with out any fatal or disabling injury accident and without any damage to property BHEL may, at its sole discretion, favorably consider to reward the contractor suitably for the performance.
9.31	The contractor shall carefully follow the safety requirement of BHEL/ the purchaser with the regard to voltages used in critical areas.
9.32	The contractor shall use only properly insulated and armored cables which conform to the requirement of Indian Electricity Act and Rules for all wiring, electrical applications at site. BHEL reserves the right to replace any unsafe electrical installations, wiring, cabling etc. at the cost of the contractor. All electrical appliances used in the work shall be in good working condition and shall be properly earthed. No maintenance work shall be carried out on live equipment. The contractor shall maintain adequate number of qualified electricians to maintain his temporary electrical installations. Area wise Electrical safety inspection is to be carried out on monthly basis as per "Electrical Safety Inspection checklist" and the report is to be submitted to BHEL safety officer
9.33	The contractor shall arrange adequate number of persons specifically for clearing any debris and for house keeping of the erection area including restacking of components in the erection areas. Housekeeping to be carried out

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	as per BHEL's checklist and report is to be submitted to BHEL safety officer
9.34	In case of any damage to property due to lapses by the contractor, BHEL shall have the right to recover the cost of such damages from the contractor after holding an appropriate enquiry.
9.35	The contractor shall submit report of all accidents, fires and property damage etc to the Engineer immediately after such occurrence, but in any case not later than 24 hours of the occurrence. Such reports shall be furnished in the manner prescribed by BHEL. In addition periodic reports on safety shall also be submitted by the contractor to BHEL from time to time as prescribed by the Engineer. Compiled monthly reports of all kinds of accidents, fires and property damage to be submitted to BHEL safety officer as per prescribed formats
9.36	Before commencing the work, the contractor shall appoint/nominate a responsible person to supervise implementation of all safety measures and liaison with his counterpart of BHEL.
9.37	Suitable scaffolds shall be provided for workman for all works that cannot safely be done from the ground, or from solid construction except in the case of short duration of work which can be done safely from ladders. When a ladder is used, it shall be of rigid construction made of steel. The steps shall have a minimum width of 45 cm and a maximum rise of 30 cm. Suitable handholds of good quality wood or steel shall be provided and the ladder shall be given an inclination not steeper than $\frac{1}{4}$ horizontal and 1 vertical.
9.38	Scaffolding or staging more than 3.6 m above the ground floor, swung or suspended from an overhead support or erected with stationery support shall have a guard rail properly bolted, braced or otherwise secured, at least 90 cm above the floor or platform of such scaffolding or staging and extending along the entire length of the out side and ends thereof with only such openings as may be necessary for the delivery of materials. Such scaffolding or staging shall be so fastened as to prevent it from savor, from swaying, from the building or structure.
9.39	Working platforms, gangways and stairways shall be so constructed that they do not sag unduly or unequally and if the height of the platform gangways provided is more than 3.6 m above ground level or floor level, they shall be closely boarded and shall have adequate width which shall not be less than 750 mm and be suitably fenced as described above.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.40	Every opening in the floor or a building or in a working platform shall be provided with suitable means to prevent the fall of persons or materials by providing suitable fencing or railing whose minimum height shall be 90 cm.
9.41	Wherever there are open excavation in ground, they shall be fenced off by suitable railing and danger signals installed at night so as to prevent persons slipping into the excavations.
9.42	Safe means of access shall be provided to all working places. Every ladder shall be securely fixed. No portable single ladder shall be over 9 m in the length while the width between side rails in rung ladder shall in no case be less than app. 29.2 cm for ladder upto and including 3 m in length. For longer ladders this width shall be increased at least $\frac{1}{4}$ " for each additional foot of length.
9.43	A sketch of the ladders and scaffolds proposed to be used shall be prepared and approval of the Engineer obtained prior to Construction.
9.44	All personnel of the Contactor working within the plant site shall be provided with safety helmets. All welders shall wear welding goggles while doing welding work and all metal worker shall be provided with safety gloves. Persons employed on metal cutting and grinding shall wear safety glasses.
9.45	Adequate precautions shall be taken to prevent danger for electrical equipment. No materials on any of the sites of work shall be so stacked or placed as to cause danger or inconvenience to any person or the public.
9.46	All trenches, four feet or more in depth, shall at all times be supplied with at least one ladder for each 30 m in length or fraction thereof. The ladder shall be extended from bottom of the trench to at least 90 cm above the surface of the ground. Sides of the trenches which are 1.50 m or more in depth shall be stepped back to give suitable slope or securely held by timer bracing, so as to avoid the danger of sides collapsing. The excavated materials shall not be placed within 1.5 m of the edges of the trench or half of the depth of the trench whichever is more. Cutting shall be done from top to bottom. Under no circumstances undermining or undercutting shall be done.
9.47.1	The contractor shall take permission of BHEL prior to risky jobs such as working at height, hot work, liftig activities, etc through permits. No job should be started without permits.
9.47.2	The Contactor shall take all measures at the sites of the work to protect all persons from accidents and shall be bound to bear the expenses of defense of

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	every suit, action or other proceeding at law that may be brought by any persons for injury sustained or death owing to neglect of the above precautions and to pay any such persons such compensation or which may with the consent of the Contractor be paid to compromise any claim by any such person should such claim proceeding be filed against BHEL, the Contractor hereby agrees to indemnify BHEL against the same.
9.48	Before any demolition work is commenced and also during the process of the work the following shall be ensured:
9.48.1	All roads and open areas adjacent to the work site shall either be closed or suitably protected.
9.48.2	No electric cable or apparatus which is liable to be a source of danger nor a cable or an apparatus used by the operator shall remain electrically charged.
9.48.3	All practical steps shall be taken to prevent danger to persons employed from the risks of fire or explosion or flooding. No floor, roof or other part of the building shall be so overloaded with debris or materials as to render them unsafe.
9.49	All necessary personnel safety equipment as considered adequate by the Engineer should be kept available for the use of the persons employed in the Site and maintained in a condition suitable for immediate use and the Contractor should take adequate steps to ensure proper use of equipment by those concerned.
9.49.1	Workers employed on mixing asphalted materials, cement and lime mortars shall be provided with protective foot wear and protective goggles.
9.49.2	Those engaged in white washing and mixing or stacking of cement bags or any materials which is injurious to the eyes shall be provided with protective goggles.
9.49.3	Those engaged in welding works shall be provided with welder's protective eyesight lids.
9.49.4	Stone breakers shall be provided with protective goggles and protective clothing and seated sufficient to safe intervals.
9.49.5	Where workers are employed in sewers and manholes, which are in use, the Contractor shall ensure that the manhole covers are opened and ventilated at least for an hour before the workers are allowed to get into manhole, and the manholes so opened shall be cordoned off with suitable railing and provided

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	with warning signals or boards to prevent accident to the public.
9.49.6	The Contractor shall not employ men below the age of 18 years and women on the work of painting with products containing lead in any form. Wherever men above the age of 18 are employed on the work of lead painting, the following precautions should be taken.
9.49.6.1	No paint containing lead or lead products shall be used except in the form of paste or ready made paint.
9.49.6.2	Suitably face masks should be supplied for use by the workers where paints are applied in the form of spray or a surface having lead paint dry rubbed and scrapped.
9.49.6.3	Overalls shall be supplied by the Contractor to the workmen and adequate facilities shall be provided to enable the working painters to wash during the cessation of work.
9.50	When the work is being done near any place where there is risk of drowning all necessary equipment should be provided and kept ready for use and all necessary steps taken for prompt rescue of any person in danger and adequate provision should be made for prompt first aid treatment of all injuries likely to be sustained during the course of the work.
9.51	Motors, gearing, transmission, electric wiring and other dangerous parts of hoisting appliances should be provided with efficient safe guards. Hoisting appliance should be provided with such means as will reduce to the minimum the risk of any part of a suspended load becoming accidentally displaced. When workers employed on electrical installations which are already energized, insulting mats, wearing apparel, such as gloves, sleeves and boots as may be necessary should be provided. The worker should not wear any rings, watches and carry keys or other materials which are good conductor of electricity.
9.52	All scaffolds, ladders and other safety devices mentioned or described herein shall be maintained in safe condition and no scaffold, ladder or equipment shall be altered or removed while it is in use. Adequate washing facilities should be provided at or near the places of work.
9.53	The contractor shall maintain and ensure necessary safety measures as required for inspection and tests HV test, Pneumatic test, Hydraulic test, Spring test, Bend test etc as applicable, to enable inspection Agency for performing Inspection. If any test equipment is found not complying with proper safety

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	requirements then the Inspection Agency may withhold inspection, till such time the desired safety requirements are met.
9.54	The Contractor shall notify BHEL of his intention to bring to site any equipment or material which may create hazard. BHEL shall have the right to prescribe the conditions under which such equipment or materials may be handled and the contractor shall adhere to such instructions. BHEL may prohibit the use of any construction machinery, which according to him is unsafe. No claim for compensation due to such prohibition will be entertained by BHEL.
9.55	All safety precautions shall be taken for welding and cutting operations as per IS-818. All safety precautions shall be taken for foundation and other excavation marks as per IS-3764.
9.56	.All gas cylinders shall be stored in upright position. Suitable trolley shall be used. There shall be flash-back arrestors conforming to IS-11006 at both cylinder and burner ends. Damaged tube and regulators must be immediately replaced. No of cylinders shall not exceed the specified quantity as per OCP
9.57	These safety provisions should be brought to the notice of all concerned by display on a notice board at a prominent, place at work spot. The persons responsible for compliance of the safety code shall be named therein by the Contractor
9.58	To ensure effective enforcement of the rules and regulations relating to safety precautions the arrangement made by the contract shall be open to inspection by the Engineer of the Engineer's Representative.
9.59	Keeping the work area clean/ free from debris, removed scaffoldings, scraps, insulation/sheeting wastage /cut pieces, temporary structures, packing woods etc. will be in the scope of the contractor. Such cleanings has to be done by contractor within quoted rate, on daily basis by an identified group. If such activity is not carried out by contractor / BHEL is not satisfied, then BHEL may get it done by other agency and actual cost alongwith BHEL overheads will be deducted from contractor's bill. Such decisions of BHEL shall be binding on the contractor.
9.60	Notwithstanding the above clauses there is nothing to exit the Contractor from the operations of any other Act or Rule in force in area of work in this respect. Provided always that all safety measures apart from those specifically provided in this agreement which are brought to the notice of the Contractor from time to time by the Engineer shall be complied by the Contractor. Provided further that

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	all consequences, damages, or losses arising by reason of any safety code shall be met with by the Contractor.																																																																
9.61	<u>NON COMPLIANCE:-</u> NONCONFORMITY OF SAFETY RULES AND SAFETY APPLIANCES WILL BE VIEWED SERIOUSLY AND BHEL HAS RIGHT TO IMPOSE FINES ON THE CONTRACTOR AS UNDER <u>for every instance of violation noticed:</u> <table border="1"> <thead> <tr> <th>SN</th><th>Violation of Safety Norms</th><th>Fine (in Rs)</th></tr> </thead> <tbody> <tr><td>01</td><td>Not Wearing Safety Helmet</td><td>50/- *</td></tr> <tr><td>02.</td><td>Not wearing Safety Belt or not anchoring life line</td><td>100/-*</td></tr> <tr><td>03</td><td>Not wearing safety shoe</td><td>100/-*</td></tr> <tr><td>04</td><td>Not keeping gas cylinders vertically</td><td>100/-</td></tr> <tr><td>05</td><td>Not using flash back arrestors</td><td>50/-</td></tr> <tr><td>06</td><td>Not wearing gloves</td><td>50/- *</td></tr> <tr><td>07.</td><td>Grinding Without Goggles</td><td>50/- *</td></tr> <tr><td>08.</td><td>Not using 24 V Supply For Internal Work</td><td>500/-</td></tr> <tr><td>09.</td><td>Electrical Plugs Not used for hand Machine</td><td>100/-</td></tr> <tr><td>10.</td><td>Not Sliding property</td><td>200/-</td></tr> <tr><td>11.</td><td>Using Damaged Sling</td><td>200/-</td></tr> <tr><td>12.</td><td>Lifting Cylinders Without Cage</td><td>500/-</td></tr> <tr><td>13.</td><td>Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.</td><td>200/-</td></tr> <tr><td>14.</td><td>Not Removing Small Scrap From Platforms</td><td>200/-</td></tr> <tr><td>15.</td><td>Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting</td><td>200/-</td></tr> <tr><td>16.</td><td>Not Maintaining Electric Winches Which are Operated Dangerously</td><td>500/-</td></tr> <tr><td>17.</td><td>Improper Earthing Of Electrical T&P</td><td>500/-</td></tr> <tr><td>18</td><td>No or improper barricading</td><td>500/-</td></tr> <tr><td>19.</td><td>Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)</td><td>1000/-</td></tr> <tr><td>20.</td><td>Accident Resulting in Partial Loss in Earning Capacity</td><td>25,000/- per victim</td></tr> </tbody> </table>		SN	Violation of Safety Norms	Fine (in Rs)	01	Not Wearing Safety Helmet	50/- *	02.	Not wearing Safety Belt or not anchoring life line	100/-*	03	Not wearing safety shoe	100/-*	04	Not keeping gas cylinders vertically	100/-	05	Not using flash back arrestors	50/-	06	Not wearing gloves	50/- *	07.	Grinding Without Goggles	50/- *	08.	Not using 24 V Supply For Internal Work	500/-	09.	Electrical Plugs Not used for hand Machine	100/-	10.	Not Sliding property	200/-	11.	Using Damaged Sling	200/-	12.	Lifting Cylinders Without Cage	500/-	13.	Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.	200/-	14.	Not Removing Small Scrap From Platforms	200/-	15.	Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting	200/-	16.	Not Maintaining Electric Winches Which are Operated Dangerously	500/-	17.	Improper Earthing Of Electrical T&P	500/-	18	No or improper barricading	500/-	19.	Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)	1000/-	20.	Accident Resulting in Partial Loss in Earning Capacity	25,000/- per victim
SN	Violation of Safety Norms	Fine (in Rs)																																																															
01	Not Wearing Safety Helmet	50/- *																																																															
02.	Not wearing Safety Belt or not anchoring life line	100/-*																																																															
03	Not wearing safety shoe	100/-*																																																															
04	Not keeping gas cylinders vertically	100/-																																																															
05	Not using flash back arrestors	50/-																																																															
06	Not wearing gloves	50/- *																																																															
07.	Grinding Without Goggles	50/- *																																																															
08.	Not using 24 V Supply For Internal Work	500/-																																																															
09.	Electrical Plugs Not used for hand Machine	100/-																																																															
10.	Not Sliding property	200/-																																																															
11.	Using Damaged Sling	200/-																																																															
12.	Lifting Cylinders Without Cage	500/-																																																															
13.	Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.	200/-																																																															
14.	Not Removing Small Scrap From Platforms	200/-																																																															
15.	Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting	200/-																																																															
16.	Not Maintaining Electric Winches Which are Operated Dangerously	500/-																																																															
17.	Improper Earthing Of Electrical T&P	500/-																																																															
18	No or improper barricading	500/-																																																															
19.	Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)	1000/-																																																															
20.	Accident Resulting in Partial Loss in Earning Capacity	25,000/- per victim																																																															

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	<table><tr><td>21.</td><td>Fatal Accident/Accidents Resulting in total loss in Earning Capacity</td><td>1,00,000/- per victim #</td></tr></table>	21.	Fatal Accident/Accidents Resulting in total loss in Earning Capacity	1,00,000/- per victim #
21.	Fatal Accident/Accidents Resulting in total loss in Earning Capacity	1,00,000/- per victim #		
	Legend:-*: per head, #: or as deducted by Customer whichever is higher Any other non-conformity noticed not listed above will also be fined as deemed fit by BHEL. The decision of BHEL engineer is final on the above. The amount will be deducted from running bills of the contractor. The amount collected above will be utilized for giving award to the employees who could avoid accident by following safety rules. Also the amount will be spent for purchasing the safety appliances and supporting the safety activity at site.			
9.61	<u>CITATION:-</u>If safety record of the contractor in execution of the awarded job is to the satisfaction of safety department of BHEL, issue of an appropriate certificate to recognize the safety performance of the contractor may be considered by BHEL after completion of the job			
9.62	<u>MEMORANDUM OF UNDERSTANDING</u> After Award Of Work, Contractors Are Required To Enter Into A Memorandum Of Understanding As Given Below: <u>Memorandum of Understanding</u> ➤ BHEL, Power Sector _____ Region is committed to Health, Safety and Environment Policy (EHS Policy). ➤ M/s _____ do hereby also commit to the same EHS Policy while executing the Contract Number _____ ➤ M/s _____ shall ensure that safe work practices not limited to the above are followed by all construction workers and supervisors. Spirit and content therein shall be reached to all workers and supervisors for compliance. ➤ BHEL will be carrying out EHS audits twice a year and M/s _____ shall ensure to close any non-conformity observed/reported within fifteen days. Signed by authorized representative of M/s -----			

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter - IX: HSE & OHSAS

	Name : Place & Date:

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-X: RA Bill Payments

10.0	RA Bill Payments
10.1	The contractor shall submit his monthly RA bills with all the details required by BHEL on specified date every month covering progress of work in all respects and areas for the previous calendar month.
10.2	Mode of payment and measurement of work completed shall be as per relevant clauses of General Conditions of Contract
10.3	Release of payment in each running bill including PVC Bills where ever applicable will be restricted to 95% of the value of work admitted as per stages of progressive pro rata payments.
10.4	The 5% thus remaining shall be treated as 'Retention Amount' and shall be released as per terms specified in the General Conditions of Contract.
10.5	The payment for running bills will normally be released within 30 days of submission of running bill complete in all respects with all documents. It is the responsibility of the contractor to make his own arrangements for making timely payments towards labour wages, statutory payments, outstanding dues etc and other dues in the meanwhile. In case of Civil works, 60% of RA Bills complete and correct in all respects and certified by BHEL Engineer, shall be paid within 15 days of receipt. Balance payment shall be within 30 days.
10.6	BHEL shall release payment through Electronic Fund Transfer (EFT)/RTGS. In order to implement this system, Contractor to furnish details pertaining to his Bank Accounts where proceeds will be transferred through BHEL's banker, as per prescribed formats: Note: BHEL may also choose to release payment by other alternative modes as applicable
10.7	Paying Authority shall be the Construction Manager of the Site. Any change in the paying Authority shall be intimated to the Contactor accordingly.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-XI : Performance Monitoring

11.0	Performance Monitoring
11.1	Performance of the contractor is monitored through various reports/reviews and shall be jointly evaluated every month for unit wise identified packages as per prescribed formats. Based on the net weighted scores obtained, Contractors shall be rated 'Good' or 'Satisfactory' or 'Unsatisfactory'
11.2	In case of any dispute on performance rating and the contractor refuses to sign on the performance rating given by BHEL package Incharge, the same shall be reviewed by BHEL site Incharge/Construction Manager and his decision shall be final.
11.3	Release of RA Bills will be contingent upon joint evaluation of performance
11.4	Performance of the contractor will be taken into consideration for assessing the capacity of the bidder to execute future jobs under tender, as detailed in the Notice Inviting Tender. Risk of non evaluation or non availability of the Monthly performance evaluation reports is to be borne by the Bidder.
11.5	In case of 'Unsatisfactory performance' for a continuous period of three or more months for a package or packages, BHEL has the right to get the balance works executed at the risk and cost of the contractor.
11.6	In case of 'Unsatisfactory performance' in a financial year, BHEL reserves the right to put on hold such Contractors for a period of six months for similar package or similar packages

SPECIAL CONDITIONS OF CONTRACT (SCC)


Chapter-XII: Suspension of Business Dealings

12.0	Suspension of Business dealings
12.1	BHEL reserves the right to take action against contractors who fail to perform or indulge in malpractices, by suspending business dealings with them.
12.2	Suspension could be in the form of 'Hold', 'De-listing' or 'Banning' a contractor.
12.3	A bidder may be put on HOLD for a period of 6 months, for future tenders for specific works on the basis of one or more of the following reasons: a) Bidder does not honour his own offer or any of its conditions within the validity period. b) Bidder fails to respond against three consecutive enquires of BHEL. c) After placement of order, Bidder fails to execute a contract. d) Bidder fails to settle sundry debt account, for which he is legitimately liable, within one year of its occurrence. e) Bidder's performance rating falls below 60% in specific category (more fully described in chapter 'Performance Monitoring') f) Bidder works are under strike/ lockout for a long period.
12.4	A Bidder may be de-listed from the list of registered Bidders of the region for a period of 1 year on the basis of one or more of the following reasons:- a) Bidder tampers with tendering procedure affecting ordering process or commits any misconduct which is contrary to business ethics. b) Bidder has substituted, damaged, failed to return, short returned or unauthorizedly disposed off materials/ documents/ drawings/ tools etc of BHEL. c) Bidder no longer has the technical staff, equipment, financial resources etc. required to execute the orders/ contracts.
12.5	A Bidder can be banned from doing any business with all Units of BHEL for a period of 3 years on the basis of one or more of the following reasons: a) Bidder is found to be responsible for submitting fake/ false/ forged documents, certificates, or information prejudicial to BHEL's interest. b) In spite of warnings, the Bidder persistently violates or circumvents the provisions of labour laws/ regulations/ rules and other statutory requirements. c) Bidder is found to be involved in cartel formation

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-XII: Suspension of Business Dealings

	d) The Bidder has indulged in malpractices or misconduct such as bribery, corruption and fraud, pilferage etc which are contrary to business ethics. e) The Bidder is found guilty by any court of law for criminal activity/ offences involving moral turpitude in relation to business dealings. f) The Bidder is declared bankrupt, insolvent, has wound up or been dissolved; i.e ceases to exist for all practical purposes. g) Bidder is found to have obtained Official Company information/ documentation by questionable means. h) Communication is received from the administrative Ministry of BHEL to ban the Bidder from business dealings.
12.6	Contracts already entered with a contractor before the date of issue of order of 'HOLD' or 'DE-LISTING' shall not be affected.
12.7	All existing contracts with a 'BANNED' contractor shall normally be short closed
12.8	Once the order for suspension is passed, existing offers/new offers of the contractor shall not be entertained
12.9	The above guidelines are not exhaustive but enunciate broad principles governing action against contractors

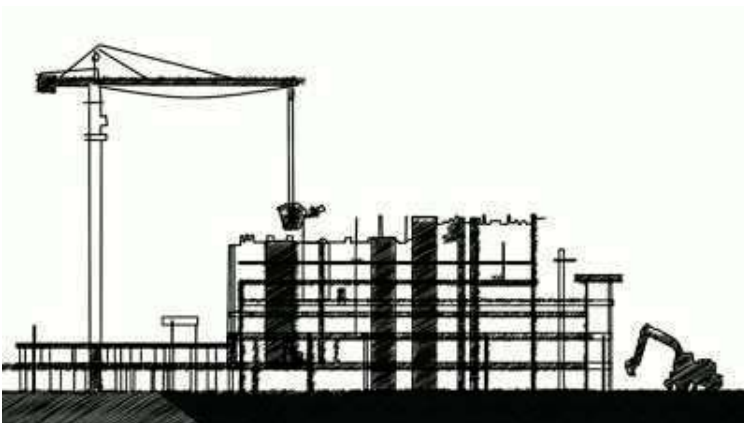

HEALTH, SAFETY and ENVIRONMENT PLAN

For

SITE OPERATIONS

By

SUB-CONTRACTORS

POWER SECTOR- EASTERN REGION

 PS-ER	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER
		Rev.: 00
		Date: 25.04.19
		Page 2 of 162

DOCUMENT ISSUE SHEET

	PREPARED BY	APPROVED BY
NAME	Saswajeet Rout	
DESIGNATION		
SIGNATURE		Pradip Ghosh Digitally signed by Pradip Ghosh DN: cn=Pradip Ghosh, o=BHEL, ou=HSE-PSER, email=pradipg@bhelpser.co.in, c=IN Date: 2019.06.15 13:02:14 +05'30'
ISSUED BY:		
ISSUED TO:		
COPY NO:		
DATE OF ISSUE:		

THIS PLAN SUPERSEDES THE STANDARD HSE PLAN

 PS-ER	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER
		Rev.: 00
		Date: 25.04.19
		Page 3 of 162

HSE PLAN FOR SITE OPERATIONS BY BHEL'S SUBCONTRACTORS AT A GLANCE

BEFORE START	SIGNING OF MOU	
	Agree to comply to HSE requirement- Statutory and BHEL's	Agree to accept BHEL's decision on release of 1.5% (as specified in the contract) of Gross bill Amount or part thereof or otherwise (non-release), based on our HSE performance as evaluated by BHEL during the execution period
	HSE ORGANISATION	
PLAN	Manpower 1 (one) safety officer for every 300 workers or part thereof 1(one) safety-supervisor for every 150 workers 1(one) safety-steward/ supervisor for every 50 workers As per Cl. 7.1	HSE Roles and responsibilities - All employees as per 7.2.1 - Site In-charge & Package In-charges- As per clause 7.2.2 - Safety officer- As per clause 7.2.3
	HSE Planning for Man, Machinery / Equipment/ Tools & Tackles	
PROVIDE	HSE INFRASTRUCTURE	
	- PPEs - Drinking Water - Washing Facilities - Latrines and Urinals - Provision of shelter for rest - Medical facilities	- Canteen facilities - Labor Colony - Emergency Vehicle - Pest Control - Scrapyard - Illumination - Crèches (if required)
TRAIN	HSE TRAINING , AWARENESS & PROMOTION	
	Training - Induction training - Height work and other critical areas - Tool Box talk & Pep Talk - Job Specific Training	Awareness & Promotion - Posters & Signage - Emergency Contact/Information Display - Banner - Competition & Awards
COMMUNICATE	HSE COMMUNICATION	
	Incident Reporting - Accident- Fatal, Major & Minor - Property damage - Near Miss Safety Performance Reporting	Event Reporting - Celebrations - Training - Medical camp - Motivational Activities



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 4 of 162

EXECUTE SAFELY

SAFETY DURING WORK EXECUTION

PERMIT TO WORK

Height work (above 2 meters), Hot Work, Heavy Lifting, Confined Space, Radiography, Excavation (More than 1.22 meters), Lockout / Tag out

OPERATIONAL CONTROL

- Welding, Gas Cutting Grinding - Rigging, Signaling - Cylinder- Storage & Movement - Demolition work - T&Ps - Chemical Handling - Electrical works - Painting	- Fire - Scaffolding - Height work - Working Platform - Excavation / Civil Work - Ladder - Lifting - Hoisting appliance - Hard Barricading

HOUSE KEEPING

WASTE MANGEMENT

TRAFFIC MANAGEMENT

ENVIRONMENTAL CONTROL

EMERGENCY PREPAREDNESS AND RESPONSE PLANNING

CHECKS

HSE AUDITS & INSPECTION

- Daily Checks - Inspection of Height work - Inspection of PPEs - Inspection of T & Ps	- Inspection of Cranes & Winches - Inspection of Welding and Gas cutting - Inspection of elevators etc.

HSE PERFORMANCE EVALUATION PARAMETERS

NON CONFORMANCE

PENALTY for NON CONFORMANCE

Refer Clause 16 Incremental
penalty

For repeated violation by the same person, the penalty would be double of the previous penalty

For repeated fatal incident in the same contract / package, incremental penalty to be imposed. The subcontractor will pay 2 times the penalty compared to the previously paid in case there are repeated cases of fatal incidents under the same subcontractor for the same package in the same unit.

COMPENSATION TO ACCIDENT VICTIMS

Refer Clause 17

Employee Compensation Act, 1922

Other Acts and Guidelines relevant to employee compensation



HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SUB-CONTRACTORS
(GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 5 of 162

ORGANIZATION OF THIS DOCUMENT

- **GENERAL SECTION**
- **SECTION A:**
MAIN REQUIREMENTS APPLICABLE IN FULL
- **SECTION B:**
SPECIAL REQUIREMENTS
- **ANNEXES**



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 6 of 162

CONTENTS

S. No.	Description	Page No.
GENERAL		
1	PURPOSE	9
2	SCOPE	9
3	OBJECTIVES AND TARGETS	10
4	REFERENCES	11
5	HEALTH, SAFETY & ENVIRONMENT POLICY	12
	MEMORANDUM OF UNDERSTANDING	13
6	TERMS & DEFINITIONS	14
SECTION-A		
7	HSE ORGANIZATION	17
7.1	DEPLOYMENT (NUMBERS, QUALIFICATIONS & EXPERIENCE)	17
7.2	HSE RESPONSIBILITIES	19
8	PLANNING BY SUBCONTRACTOR	23
8.1	MOBILISATION OF MACHINERY/EQUIPMENT/TOOLS	23
8.2	MOBILISATION OF MANPOWER BY SUBCONTRACTOR	24
8.3	PROVISION OF PPEs	25
8.4	ARRANGEMENT OF INFRASTRUCTURE	26
9	HSE TRAINING & AWARENESS	32
10	HSE PROMOTION – SIGNAGE, POSTERS, COMPETITIONS, AWARDS ETC	34
11	HSE COMMUNICATION & PARTICIPATION	35
12	INCIDENT INVESTIGATION & CORRECTIVE ACTION	36
13	SAFETY DURING WORK EXECUTION	37
13.1	HSE SYSTEMS & PROCEDURES	37
13.2	WORK PERMIT SYSTEM	39
13.3	ACTIVITY SPECIFIC SAFETY REQUIREMENTS	40
13.4	ENVIRONMENTAL CONTROL	46
13.5	HOUSEKEEPING	47



HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SUB-CONTRACTORS
(GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 7 of 162

S. No.	Description	Page No.
13.6	WASTE MANAGEMENT	47
13.7	TRAFFIC MANAGEMENT	48
13.8	EMERGENCY PREPAREDNESS & RESPONSE	50
13.9	CONTROL OF DOCUMENTS	50
13.10	CONTROL OF RECORDS	50
14	HSE INSPECTION	51
15	HSE PERFORMANCE	54
16	HSE PENALTIES FOR NON-COMPLIANCE	55
17	OTHER REQUIREMENTS	56
18	INTERNAL & EXTERNAL HSE AUDITS	56
19	HSE REVIEW	57
20	FORMATS USE	58
	FORMATS	
SECTION B		
	ESTABLISHMENT OF COMMON FACILITIES / INFRASTRUCTURE	
	SHARED FACILITIES	
ANNEXES		
	ANNEXURE-1	
	ANNEXURE-2	
	ANNEXURE-3	
	ANNEXURE-A: ACTIVITY SPECIFIC REQUIREMENTS FOR SAFETY	
	ANNEXURE-B: HSE PRECAUTIONS FOR ADVERSE CLIMATES & WEATHER CONDITIONS	
	ANNEXURE-C: FIRE EXTINGUISHER REQUIREMENTS	
	ANNEXURE-D: SPECIFICATIONS	
	RECORD OF REVISIONS	

GENERAL

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER Rev.: 00 Date: 25.04.19 Page 9 of 162

1. PURPOSE

- 1.0** The purpose of this HSE Plan is to provide for the systematic identification, evaluation, prevention and control of general workplace hazards, specific job hazards, potential hazards and environmental impacts that may arise from foreseeable conditions during installation and servicing of industrial projects and power plants.
- 1.1** This document shall be followed by BHEL's Sub-Contractors at all installation and servicing sites. In case BHEL has contractual HSE obligations towards customer, this document will be followed in conjunction with (BHEL's) customer specific requirements, ensuring that applicable systems, controls and checks of both are implemented in letter and spirit.
- 1.2** In case the customer has any specific requirement, the same is to be fulfilled but may not include financial inclusion.
- 1.3** This document shall be followed unless otherwise mentioned in TCC (technical condition of contract) or elsewhere in NIT or contract documents. This supersedes all HSE clauses in GCC.
- 1.4** Although every effort has been made to make the procedures and guidelines in line with statutory requirements, in case of any discrepancy relevant statutory guidelines must be followed.

2. SCOPE

The document is applicable on all activities and assets including managerial, supervisory, professional, technical, clerical and other workers including contract laborers; and equipment operating under the control of BHEL's Subcontractors at all installation / servicing activities of BHEL Power Sector as per the relevant contractual obligations.

3. OBJECTIVES

The HSE Plan reflects that BHEL places high priority upon the Occupational Health, Safety and Environment at workplaces. The Sub-contractor shall:

Health & Safety

- Prevent injury and ill health of all persons at site ('Persons' refers to all personnel including managerial, supervisory, professional, technical, clerical and other workers including contract laborers)

Environment

- Prevent pollution to environment and ensure protection of environment taking into account interested party concern and conservation of resources and reduction of wastage

Legal Requirements

- Comply at all times with the relevant statutory and contractual HSE requirements.

Planning & Resources

- Ensure that all work planning takes into account all persons that may be affected by the work.
- Ensure timely provision of resources to facilitate effective implementation of HSE requirements.

Competency, Training & Awareness

- Provide trained, experienced and competent personnel. Ensure medically fit personnel only are engaged at work.
- Provide all personnel with adequate information, instruction, training and supervision on the safety aspect of their work.

Maintenance of Equipment

- Ensure fitness testing of all T&Ps. Lifting appliances like cranes, chain pulley blocks etc. are certified by competent authority.

Safety during Operations

- Provide and maintain plant, places and systems of work that are safe and without risk to health and the environment.
- Effectively control, co-ordinate and monitor the activities of all personnel on the Project sites including subcontractors in respects of HSE.
- Establish effective communication on HSE matters with all relevant parties involved in the Project works.

HSE Improvement

- Capture the data of all incidents including near misses, process deviation etc. Investigate and analyze the same to find out the root cause
- Ensure timely implementation of correction, corrective action.
- Ensure continual improvement in HSE performance



POWER SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SUB-CONTRACTORS
(GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 11 of 162

GOALS AND TARGETS

- ❖ To achieve “Zero Incident at Site” (LTI)
- ❖ 100% compliance of all legal/statutory requirements related to HSE.
- ❖ 100% Health, Safety and Environmental Induction training attendance for all workers.
- ❖ 100% High Risk activities to be carried out only after approved Method Statement, HIRA / Aspect-Impact / JSA / OCP and Permit to Work are implemented.
- ❖ 100% PPEs compliance in high and medium risk activities.
- ❖ 100% monitoring of all Work Areas
- ❖ 100% detection of non-conformities in work area and 100% closure within specified time
- ❖ 100% incident (near miss, minor, major, other) reporting, recording and reviewing for corrective actions.
- ❖ Regular Safety Reviews to assess HSE program compliance and 100% closure of any recognized gaps to continually improve safety management and incident prevention.

4. REFERENCES

1. ALL CONTRACTUAL HSE REQUIREMENTS INCLUDING THIS DOCUMENT
2. ALL APPLICABLE ACTS, RULES & REGULATIONS
3. BHEL POWER SECTOR HSE MANAGEMENT SYSTEM
 - I. HSE PROCEDURES (13.1.1)
 - II. WORK PERMITS (See Clause 13.1.2)
 - III. OPERATIONAL CONTROL PROCEDURES (See Clause 13.1.3)
 - IV. FORMATS (See Clause 21)
4. BHEL CORPORATE STANDARD PPE GUIDELINES
5. RELEVANT INDIAN STANDARDS FOR SAFETY (See Annexure 02)

(Note: Wherever, the date or revision number of a document is not mentioned, latest revision is implied)

5. ***BHEL HEALTH, SAFETY & ENVIRONMENT POLICY:***

In BHEL, Health, Safety and Environment (HSE) responsibilities are driven by our commitment to protect our employees and people we work with, community and environment. BHEL believes in zero tolerance for unsafe work/non-conformance to safety and in minimizing environmental footprint associated with all its business activities. We commit to continually improve our HSE performance by:

- Developing safety and sustainability culture through active leadership and by ensuring availability of required resources.
- Ensuring compliance with applicable legislation, regulations and BHEL systems.
- Taking up activities for conservation of resources and adopting sound waste management by following Reduce/Recycle/Reuse approach.
- Continually identifying, assessing and managing environmental impacts and Occupational Health & Safety risks of all activities, products and services adopting approach based on elimination/substitution/reduction/control.
- Incorporating appropriate Occupational Health, Safety and Environment criteria into business decisions, design of products & systems and for selection of plants, technologies and services.
- Imparting appropriate structured training to all persons at workplace and promoting awareness amongst customers, contractors and suppliers on HSE issues.
- Reviewing periodically this policy and HSE Management Systems to ensure its relevance, appropriateness and effectiveness.
- Communicating this policy within BHEL and making it available to interested parties.



Atul Sobti
Chairman & Managing Director

6. TERMS AND DEFINITIONS

6.0 INCIDENT

Work- related or natural event(s) in which an injury or ill health (regardless of severity) or fatality, damage to property/environment occurred, or could have occurred.

6.1 NEAR MISS

An incident where no ill health, injury, damage or other loss occurs, but it had a potential to cause, is referred to as “Near-Miss incident”.

6.2 MAN-HOURS WORKED

The total number of employee hours worked by all employees including subcontractors working in the premises.

It includes managerial, supervisory, professional, technical, clerical and other workers including contract laborers.

Man-hours worked shall be calculated from the payroll or time clock recorded including overtime. When this is not feasible, the same shall be estimated by multiplying the total man-days worked for the period covered by the number of hours worked per day. The total number of workday for a period is the sum of the number of men at work on each day of period. If the daily hours vary from department to department separate estimate shall be made for each department and the result added together.

6.3 FIRST AID CASES (FAC)

First aid cases include:

1. Visit to a physician or a licensed health care professional solely for observation or counselling
2. Conduct of diagnostic procedures like X rays, blood test including the prescription medications used solely for diagnostic purposes (e.g. eye drops to dilate eyes)
3. Using a non-prescription medicine at non-prescription strength (for medication available in both prescription and non-prescription form as recommendation by a physician or other licensed health care professional to use a non-prescription medication at prescription strength is considered medical treatment for record keeping purposes);
4. Administering tetanus immunizations (other immunizations, such as Hepatitis B vaccine or rabies vaccine, are considered medical treatment);
5. Cleaning, flushing or soaking wounds on the surface of the skin;
6. Using wound coverings such as bandages, Band-Aids TM, gauze pads, etc.; or using butterfly bandages or Steri-Strips TM (other wound closing devices such as sutures, staples, etc., are considered medical treatment);
7. Using hot or cold therapy;
8. Using any non-rigid means of support, such as elastic bandages, wraps, non-rigid back belts, etc. (devices with rigid stays or other systems designed to immobilize parts of the body are considered medical treatment for record-keeping purposes);

9. Using temporary immobilization devices while transporting an accident victim (e.g., splints, slings, neck collars, back boards, etc.).
 10. Drilling of a fingernail or toenail to relieve pressure, or draining fluid from a blister;
 11. Using eye patches;
 12. Removing foreign bodies from the eye using only irrigation or a cotton swab;
 13. Removing splinters or foreign material from areas other than the eye by irrigation, tweezers, cotton swabs or other simple means;
 14. Using finger guards;
 15. Using massages (physical therapy or chiropractic treatment are considered medical treatment for recordkeeping purposes); or
 16. Drinking fluids for relief of heat stress.
- No other treatments are considered first aid.

6.4 MEDICAL TREATMENT CASES (MTC)

An incident involved with an injury or illness that needs medical attention beyond First-aid as per 6.3 above.

6.5 Dangerous Occurrence is defined as:

- (1) Collapse or failure of lifting appliances or hoist or conveyors or other similar equipment/machine;
- (2) Collapse or failure of a crane, derrick, winch, hoist or other appliance used in raising or lowering persons or goods or any part thereof, or the overturning of a crane;
- (3) Explosion or fire causing damage to the structure of any room or place in which persons are employed, or to any machine or plant, resulting in the complete suspension of ordinary work;
- (4) Electrical short circuit or failure of electrical machinery, plant or apparatus, attended by explosion or fire, causing structural damage involving its stoppage or disuse;
- (5) Explosion of a receiver or container used for the storage at a pressure greater than atmospheric pressure of any gas or gases (including air) or any liquid or solid resulting from the compression of gas;
- (6) Collapse in whole or part from any cause whatsoever of any roof, wall, floor, Structure or foundation forming part of the construction site in which persons are employed;
- (7) Total or partial collapse of any overburden, face, tip or embankment on the Construction site;
- (8) The overturning of, or collision with any object by any bulldozer, dumper, excavator, grader, lorry or shovel loader, or any mobile machine used for the handling of any substance on the construction site.

6.6 **Fire:** Except Dangerous occurrence, any incident involving fire.

6.7 **Property Damage:** Except Dangerous Occurrences and Fire, any incident of property (materials, building, equipment etc) getting damaged.

6.8 TYPE OF INCIDENT / ACCIDENT & THEIR REPORTING:

The categories of Incident / accident are as follows:

Non-Reportable Cases or NON-LTI: (Including First-aid cases as per 6.3 and MTC as per 6.4)

Minor: In this case the injured person resumes duty within 48 hours of incident.



POWER SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SUB-CONTRACTORS
(GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 15 of 162

Reportable Cases (LTI or Loss Time Injury Cases):

Major: In this case the injured person is disable for 48 hours or more and is not able to perform his duty. (as per IS 3786). It includes fatality.

All incidents must be reported orally immediately and in writing within 24 hours of time of incident. However, in case of fatality, it shall be reported to the statutory authority within prescribed timeline through proper channel. Internal reporting shall be done within 6 hours of time of the incident

6.9 TOTAL REPORTABLE FREQUENCY RATE

Frequency rate is the number of Reportable Lost Time Injury (LTI) per one Million Man hours worked. Mathematically, the formula read as:

$$\frac{\text{Number of Reportable LTI}}{\text{Total Man Hours Worked}} \times 1,000,000$$

6.10 SEVERITY RATE

Severity rate is the Number of days lost due to Lost Time Injury (LTI) per one Million Man hours worked. Mathematically, the formula reads as:

$$\frac{\text{Days lost due to LTI}}{\text{Total Man Hours Worked}} \times 1,000,000$$

6.11 FREQUENCY SEVERITY INDEX (FSI)

$$\text{Frequency Severity Index, FSI} = \sqrt{\text{FR} \times \text{SR} / 1000}$$

6.12 INCIDENCE RATE

Incidence Rate is the Number of LTI per one thousand manpower deployed. Mathematically, the formula reads as:

$$\frac{\text{Number of LTI} \times 1000}{\text{Average number of manpower deployed}}$$

6.13 JOB SAFETY ANALYSIS

A job safety analysis (JSA) is a procedure which helps integrate accepted safety and health principles and practices into a particular task or job operation. In a JSA, each basic step of the job is to identify potential hazards and to recommend the safest way to do the job. Other terms used to describe this procedure are job hazard analysis (JHA) and job hazard breakdown.

6.14 SAFETY WALK

It's a walk (conducted periodically) by an official through a portion or whole of a site as an HSE officer, noting down HSE observations, speaking to concerned workmen and supervisor on observation, recording and reporting to in charges of agencies, getting the same rectified with personal follow up - to send out a strong message on Management's commitment to safety.

6.15 HEAVY & COMPLEX LIFTING

A heavy and complex lifting activity includes:

1. Lifting above 50 Tons
 2. Tandem Lifting using multiple cranes
 3. Total load exceeding 75% of capacity of crane
 4. Lift of unusual difficulty or geometry or rigging
 5. Lift over operating units
 6. Any other lift as decided by site HSE / Erection
- In any case, Job Safety Analysis to be carried out for any lift above 5 Tons.

6.16 SAFETY COMMITTEE

As per the BOCW, Safety Committee shall be constituted if there are more than five hundred or more construction workers are employed at any site. As per the Factories Act, 1948 it is for 250 workers. It shall be represented by equal number of representatives of employer and construction workers.

6.17 NIGHT WORK

Work conducted after sunset when only a fraction of total manpower is available

Section-A

Main Requirements

(Applicable in Full)



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date: 25.04.19
Page **18** of **58**

7. HSE ORGANISATION

7.1 DEPLOYMENT

7.1.1 Minimum Number (Availability per contract / package per Working Shift)

7.1.1.1 HSE Officer	7.1.1.2 HSE Supervisor	7.1.1.3 HSE Steward / Observer
1 per 300 workers or part thereof as a minimum or as mandated by applicable legal requirements, whichever more stringent	1 per 150 workers or part thereof	1 per 50 workers or part thereof

7.1.1.4 The safety officers shall be engaged directly by the sub-contractor, whereas safety supervisors and safety stewards may be from the agencies engaged by the sub-contractor.

7.1.1.5 Deployment Plan:

- 7.1.1.5.1 These shall be minimum one HSE officer along with HSE supervisor and HSE steward in the aforesaid ratio for every shift for each unit of Boiler/ESP/Power House & TG/ Chimney/ Whole of Cooling Tower.
- 7.1.1.5.2 For Civil works and other BOP items, deployment shall be broadly as specified in the above table. But BHEL shall finally approve the deployment based on nature and volume of jobs, Risks and hazards associated etc.
- 7.1.1.5.3 The deployment plan of Safety manpower at various locations shall be submitted to BHEL for approval by subcontractor

BHEL reserves the right to demand more safety personnel than what is stipulated here and change the deployment pattern

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)		Doc. No.: HSEP:14-ER Rev.: 00 Date: Page 19 of 58

7.1.2 QUALIFICATION & EXPERIENCE

All Degrees/ Diplomas shall be recognized by State Council for Technical Education & Vocational Training (SCTE & VT) / All India Council for Technical Education (AICTE) / University

7.1.2.1 HSE Officer	7.1.2.2 HSE Supervisor	7.1.2.3 HSE Steward / Observer
A. i. Recognized degree in any branch of Engg. or Tech. or Architecture with practical experience of working in a building or other construction work in supervisory capacity for a period of not less than two years, or Recognized diploma in any branch of Engg. or Tech with practical experience of working in a building or other construction work in supervisory capacity for a period of not less than five years. ii. Recognized degree or diploma in Industrial safety iii. (Preferably) have adequate knowledge of the language spoken by majority of the workers at the construction site. Alternatively: B. Graduation Degree in Science with Physics & Chemistry and degree or diploma in Industrial Safety (from any Indian institutes recognized by AICTE or State Council of Tech. Education of any Indian State) with practical experience of working in a building, plant or other construction works (as Safety Officer, in line with Indian Factories Act, 1958) for a period of not less than five years.	As a minimum, (s)he shall possess: A recognized graduation Degree in Science (with Physics & Chemistry) or a recognized diploma in Engg. or Tech. with: a. Minimum Two years of practical experience in construction work environment and b. Should possess requisite skills to deal with construction safety & fire related day-to-day issues.	As a minimum, (s)he shall possess: 1. Class XII pass certificate and 2. Trained in fire-fighting as well as in safety / occupational health related subjects, with: a. Minimum two year of practical experience in construction work environment and b. Should have adequate knowledge of the local language spoken by majority of the workers at the construction site.

7.1.3 HSE IN-CHARGE

In case there are more than one HSE Officers with any subcontractor, one of them, who is senior most by experience (in HSE discipline), may be designated as HSE In-Charge. Duties & responsibilities of such person shall be commensurate with that of relevant statute and primarily to coordinate with top management of Client and subcontractors.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 20 of 162

7.1.4 AVAILABILITY AND PENALTY FOR NON-DEPLOYMENT:

Subcontractor shall ensure physical availability of safety personnel at the place of specific work location including where Height Work Permit is required/granted. No work shall be started in any area until above safety personnel & concerned Site Engineer of subcontractor are physically deployed at site.

The Subcontractor shall prepare an organization chart identifying the areas of operations, responsibilities and reporting structure of all safety personnel and submit the same to BHEL.

The subcontractor shall deploy sufficient safety officers, supervisors and safety-stewards, as per numbers & qualifications mandated in this Section since mobilization of first batch of manpower and add more in proportion to the added strength in work force. Any delay in deployment will attract a penalty at following rates:

Non-deployment of HSE Officer	–	Rs 50000 per man-month
Non-deployment of HSE Supervisor	–	Rs 30000 per man-month
Non-deployment of HSE Steward	–	Rs 20000 per man-month

Penalty shall be collected for the period of non-availability of safety personnel after allowing a grace period of 15 days for finding a replacement.

7.1.5 QUALIFICATION OF CRANE & WINCH OPERATORS, DRIVERS etc.:

The Crane and Winch Operators, Drivers, Riggers and other professionals deployed shall be qualified and experienced, and have valid license for the class of vehicle / machinery as applicable. The subcontractor shall certify competence of these persons in writing as and when they join.

Crane/Winch operator should have certificate on subject course or owner experience certificate in letterhead.

7.1.6 In case the statutory requirements i.e. State or Central Acts and / or Rules as applicable like the Building and Other Construction Workers' Regulation of Employment and Conditions of Service- Act,1996 or State Rules (wherever notified), the Factories Act, 1948 or Rules (wherever notified), etc. are more stringent than above clarifications, the same shall be followed.

7.1.7 **BILLING:** Deployment of Safety manpower as per this clause **shall be** a billable item.

7.1.8 The Subcontractor shall verify & authenticate credentials of the HSE personnel detailed in this Section and furnish Bio-Data/Resume / Curriculum Vitae of the safety personnel as above for BHEL / Owner's approval, at least 1 month before the mobilization. The Subcontractor, whenever required, shall arrange submission of original testimonials / certificates of their Safety personnel, to BHEL / Owner (for verification/scrutiny, etc.)

7.1.9 Prior approval of CVs by BHEL for Safety Officer and Safety Supervisor is mandatory, however BHEL has right to check suitability of Safety Stewards as well.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 21 of 162

7.2 HSE RESPONSIBILITIES

The subcontractors shall communicate the HSE responsibilities as indicated in this section to relevant employees in written Form and ensure awareness of the same

7.2.1 ALL EMPLOYEES

1. To be aware of, get involved in and ensure implementation of all HSE related Systems and Procedures including but not limited to:
 - a) BHEL HSE Management System including HSE Procedures and OCPs
 - b) Work Permit System
 - c) Emergency Preparedness Response Plans
 - d) Contractual HSE requirements
 - e) Legal Requirements
 - f) Penalty System
 - g) Training requirements
2. To ensure that the persons engaged in respective area follow the safety rules like using appropriate PPEs.
3. To keep track of repetitive minor or major incident observation/ report and submit to BHEL.
4. To prepare HIRA / JSA as required and submit to BHEL for verification.
5. To record all incidents including near miss and report to BHEL.
6. To adopt safe working practices at all times and act as role model for Safety
7. To take immediate corrective action actions in case any non-conformity is observed on product / process / system with respect to Occupational Health, Safety and Environment.
8. In case any particular activity / work has extremely high consequential risk or high environmental impact, same shall be brought to the notice of BHEL Package In-charge before starting the work.
9. To interfere/ stop work as & when identified unsafe.
10. To maintain & promote improved level of house-keeping all the time at site.
11. To support/co-operate with audit team members as & when safety audits are carried out.
12. To involve in investigation, if any incident occurs in his work area.
13. To participate in safety promotional programmes.
14. To attend the safety committee meeting, if member/ invitee
15. To ensure that only fit T&Ps and qualified persons are engaged for all activities.
16. Shall ensure that person working above 2.0 meter should use Safety Harness tied to a life line/stable structure.
17. Shall ensure that materials are not thrown from height. Cautions to be exercised to



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 22 of 162

prevent fall of material from height.

18. Shall ensure that all T&Ps engaged are tested for fitness and have valid certificates from competent authorities.

7.2.2 SITE IN –CHARGE & PACKAGE IN-CHARGES OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. **Shall ensure fulfillment of HSE requirements of BHEL contract as given in this document.**
3. Shall engage qualified safety manpower as per this document at all times.
4. Shall adhere to the rules and regulations mentioned in this document, practice very strictly in his area of work in consultation with his concerned engineer and the safety coordinator.
5. Shall screen all workmen for health and competence requirement before engaging for the job and periodically thereafter as required.
6. Shall ensure that all the workers are engaged after undergoing induction training.
7. Shall arrange for all necessary PPEs like safety helmets, belts, full body harness, shoes, face shield, hand gloves etc. before starting the job. Shall ensure that no working men /women carry excessive weight more than stipulated in Factory Rule Regulation R57.
8. Shall ensure that provisions stipulated in contract Labor Regulation Act 1970, Chapter V C.9, canteen, rest rooms/washing facilities to contracted employees at site.
9. Shall report all incidents (Fatal/Major/Minor/Near Miss) to the Site engineer /HSE officer of BHEL.
10. Shall conduct Safety Walks and safety inspections, and act as a role model for Safety.
11. Shall ensure that Horseplay is strictly forbidden.
12. Shall ensure that adequate illumination is arranged during night work.
13. Shall ensure that all personnel working under subcontractor are working safely and do not create any Hazard to self and to others.
14. Shall ensure display of adequate signage/posters on HSE.
15. Shall ensure that mobile phone is not used by workers while working.
16. Shall ensure conductance of HSE audit, mock drill, medical camps, induction training and training on HSE at site.
17. Shall ensure full co-operation during Client/External /Customer HSE audits.
18. Shall ensure submission of look-ahead plan for procurement of HSE equipment's and PPEs as per work schedule.
19. Shall ensure adequate valid fire extinguishers are provided at the work site.
20. Shall ensure availability of sufficient number of toilets /restrooms and adequate drinking water at work site and labor colony.
21. Shall ensure adequate emergency preparedness
22. Site In-charge also involve in the induction training so as to share knowledge of some incident and guide the worker to perform work safely.
23. Shall ensure power source for hand lamps shall be maximum of 24 v.
24. Shall ensure temporary fencing should be done for open edges if Hand – railings and Toe-



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 23 of 162

guards are not available.

25. Shall be responsible for the periodic testing of T&Ps (winches / crane /hydra/tools/equipment so on.) and Pressure Vessels as per applicable codes and submit report to BHEL
26. Shall be member of site HSE committee and attend all meetings of the committee

7.2.3 HSE OFFICER OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. Carry out safety inspection of Work Area, Work Method, Men, Machine & Material, P&M and other tools and tackles.
3. Facilitate HIRA and Aspect/Impact Study in the area and ensure control measures.
4. Highlight the requirements of safety through Tool-box / other meetings.
5. Help concerned HOS to prepare Job Specific instructions for critical jobs.
6. Maintain record and conduct investigation of all incident/dangerous occurrences & recommend appropriate safety measures.
7. Advice & co-ordinate for implementation of HSE permit systems, OCPs & MPs.
8. Convene HSE meeting & minute the proceeding for circulation & follow-up action.
9. Plan procurement of PPE & Safety devices and inspect their healthiness.
10. Report to BHEL on all matters pertaining to status of safety and promotional programmes at site level.
11. Encourage raising Near Miss Report on safety along with, improvement initiatives on safety.
12. Facilitate administration of First Aid
13. Facilitate screening of workmen and safety induction.
14. Conduct fire Drill and facilitate emergency preparedness
15. Design campaigns, competitions & other special programs to promote safety in the workplace.
16. Notify non-conformance to safety norms observed during site visits / site inspections.
17. Recommend to Site In-charge, immediate discontinuance of work until rectification, of such situations warranting immediate action in view of imminent danger to life or property or environment.
18. To decline acceptance of such PPE / safety equipment that do not conform to specified requirements.

7.2.4 HSE SUPERVISOR OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. To assist Safety officer

7.2.5 HSE STEWARD / OBSERVER OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. To monitor allotted area for Safety violations, take required action and inform the concerned Safety Supervisor / Officer



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 24 of 162

3. To assist Safety Officer and Safety Supervisor

7.2.6 HSE DOCUMENTS, SYSTEMS & PROCEDURES:

BHEL shall provide the subcontractor soft copies of all applicable HSE Procedures, Work Permits, Operational Control Procedures, Formats and any other instructions required for the implementation of HSE Management System before commencing operations at site. Subcontractor shall ensure the availability of the same.

7.2.7 IMPORTANT SITE EHS RULES RESULTING IN POSSIBLE EXPULSION FROM SITE

- ❖ Pre-employment Medical fitness is compulsory for all workers.
- ❖ EHS induction is mandatory for all new workers, supervisor and engineers, subcontractor managers etc.
- ❖ No visitors are allowed for site visit without safety induction.
- ❖ **Mandatory PPEs are**
 - ✓ Safety helmet,
 - ✓ Hard toe safety shoes,
 - ✓ Safety glasses
 - ✓ Reflective vest
 - ✓ Full/half sleeve (at least 4-inch-long) shirt
 - ✓ Full length pant/trousers for male and preferably Salwar Kameez for female
- ❖ **Zero Tolerance Safety Rules**
 - Violation of Fall protection / not anchoring & wearing safety harness above 6 feet,
 - Work without PTW
 - Child labor at site
- ❖ Restricted Use of cell phone in the working zone, operating vehicle/crane and at height. Encourage the people not to bring mobile phones inside the project premises.
- ❖ All vehicle being used at site to be in good condition in all respect.
- ❖ All electrical installations should have individual 30 mA ELCBs
- ❖ **Fighting:** Fighting anywhere on the Project site, including in parking areas, is strictly forbidden; violators will be barred from site and possibly subjected to legal action by local authorities.
- ❖ **Horseplay:** Running, pushing, practical jokes, and other horseplay are forbidden on the project site, including in parking areas.
- ❖ **Gambling:** Gambling on the Project site is not permitted
- ❖ **Alcohol & Drugs:** Intoxication or possession of alcohol or illegal drugs is strictly forbidden.
- ❖ **Weapons:** Possession of weapons on the Project site is strictly prohibited
- ❖ **Asbestos Material:** No asbestos material is allowed to use in Project Site
- ❖ **Hair:** Anyone working on site property with scalp hair longer than the top of his/her shoulders must tie-up and restrains the hair within the hard hat or coveralls, shirt or jacket collar.
- ❖ **Jewelry:** Loose necklaces, dangling earrings and bracelets shall not be worn when working on the Project site.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 25 of 162

- ❖ **Contact Lens:** While the site does not prohibit the wearing of contact lens, BHEL Project does not recommend their use.
- ❖ **Use of Empty Drums:** Use of empty drums to climb up and work is banned. Proper stool/ ladder/ stage required to be used if intended to work at height.
- ❖ Projects must comply in full with all applicable EHS local and national legislation. In circumstances where there is a conflict between local or national legislation and client requirements, the higher (more protective) requirement must prevail.
- ❖ All persons working on suspended scaffolds/cradles/gondolas must wear and use appropriate fall prevention equipment so as to protect them effectively at all times when they are at risk from any failure of any part of the scaffold/cradle/gondola, including its suspension system
- ❖ **Construction Trucks/Vehicles**
 - ✓ Vehicles must be equipped with proper seat belts for driver and passengers. All persons riding in vehicles must be advised of the requirement that seat belts are to be used whenever the vehicles are being operated.
 - ✓ The subcontractor is responsible for assuring the overall safe condition of vehicles assigned to its projects.
 - ✓ The speed limit on the project site is a maximum of 20 Km/hr.
 - ✓ Any person found operating or driving in a reckless or careless manner without regard for the safety of other employees or the general public will be immediately removed for the equipment they were operating and permanently prohibited from operating or driving any equipment on the project.
 - ✓ Any mobile equipment found to be unsafe or defective must be immediately removed from service and sent for repair or replacement. The subcontractor must ensure that the proper repairs have been made prior to putting the equipment back into service.
- ❖ **Construction Material Handling Heavy Equipment**
 - ✓ No equipment may be modified without equipment manufacturer's authorization.
 - ✓ Rollover Protective Structures must be provided for all equipment as required.
 - ✓ Seat belts must be provided and used by operators of all equipment that has a Rollover Protective Structure.
 - ✓ All bi-directional equipment must be equipped with an operable horn that must be used as needed when the machinery is moving in either direction.
 - ✓ All bi-directional equipment must also have an operable alarm in addition to the horn.
 - ✓ All equipment must be provided with a multi-purpose (class A, B, and C) fire extinguisher mounted in an easily accessible location.
 - ✓ Braking systems, controls, safety devices must be maintained in effective operating condition.
 - ✓ The operator must inspect the equipment at the beginning of the shift and test for acceptable



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 26 of 162

- ✓ operation as per the equipment's manufacturer's instructions. Inspections must be documented and filed.
- ✓ Only qualified personnel must be allowed to operate equipment. Qualification must be documented and filed.

In case any worker violates any of the EHS rules identified by BHEL as above, following punitive action shall be taken:

First Offence	Second Offence	Third Offence	Fourth Offence
Oral warning	Gate Pass Punched	Gate pass punched (second)	Gate Pass Punched(third) and person sent out of the gate Photo of concerned worker to be displayed on Notice boards and prominent locations.

BHEL has the right to send out such person even earlier than fourth offence after considering the severity of the offence and/or the persons track record related to following general/EHS rules.

BHEL reserves right to expel even concerned supervisor or engineer as well in case of repeat of such cases of indiscipline.

Note:

The appellate authority in this case shall be the BHEL Site In-charge whose decision shall be final on the matter and binding on all parties.

8. PLANNING FOR HSE

A. Identifying Hazards / Risks & Aspects / Impacts and implementing control measures

- Subcontractor shall identify all OHS Hazards and Risks applicable to all activities in scope as per HSEP01: HSE Procedure for OHS Hazards and Risks, and plan & implement the required control measures.
- Subcontractor shall identify all Environmental Aspects and Impacts applicable to all activities in scope as per HSEP02: HSE Procedure for Environmental Aspects and Impacts, and plan & implement the control measures.

B. Register of Regulations:

Subcontractor shall prepare a register of applicable rules and regulations in the scope as per



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 27 of 162

HSEP03: HSE Procedure for Register of Regulations and plan to ensure compliance.

The detailed plans and registers in A and B to be submitted to BHEL for review and approval within 60 days of start of work at site.

Note: The plans above are dynamic and shall be periodically reviewed as per BHEL requirement.

8.1 MOBILISATION OF MACHINERY / EQUIPMENT / TOOLS

1. Subcontractor shall furnish to BHEL, the Test Certificates issued by the jurisdictional competent persons of machinery, equipment and other T&Ps to be deployed at site, before deployment. BHEL reserves the right to disallow the same if found non-conforming to HSE / legal requirements
2. As a further measure to ensure that machinery, equipment and tools being mobilized to the construction site are fit for purpose and are maintained in safe operating condition and comply with legislative and owner requirement, inspection shall be arranged by in-house expert / competent authority (preferable) for acceptance. **(Report Format: HSEP:14-F15)**
3. **The equipment considered for this purpose shall include all those in the T&P list in the tender document. Conventional Hydra crane with carriage in front shall not be permitted. Other models like FX or TRX series of Escorts or equivalent shall be permitted.**
4. In the course of work, the subcontractor shall notify the BHEL Engineer, of his intention to bring on to site any equipment or any container, with liquid or gaseous fuel or other substance which may create a hazard.
5. The Engineer shall have the right to prescribe the condition under which such equipment or container may be handled and used during the performance of the works and the subcontractor shall strictly adhere to such instructions.
6. The Engineer shall have the right to inspect any construction tool and to forbid its use, if in his opinion it is unsafe. No claim due to such prohibition will be entertained.
7. Following items should be only ISO certified and not more than 2 yr. of purchase
 - i. Chain pulley block
 - ii. Wire rope slings
 - iii. Grinding machine and wheel and buffing wheel
 - iv. Gas cutting equipment
8. Following equipment should not be more than 5 Yr. old
 1. Welding machine
 2. Vibrator Machine
 3. Concrete cutter
 4. DB/Electrical panel
9. **Office Infrastructure** - subcontractor shall arrange a computer / Laptop with Network



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 28 of 162

connection, chair and table for HSE Staff to facilitate HSE reporting and recordkeeping.

8.2 MOBILISATION OF MANPOWER

1. As a measure to ensure that manpower being mobilized to the construction site is fit and competent for safe working, screening arrangement shall be made by the sub-contractor to ensure fulfillment of contractual as well as legislative requirement by:
 - i. Ensuring the required qualification/ training/ certification/ license and experience for the job as per Section 7 of this document & applicable legal requirements
 - ii. **Medical Checkup:** Examination of medical fitness shall be conducted through qualified medical professional for all workers to be deployed. (Record: Format No. HSEP14:F02). For height workers, height phobia test to be carried out as qualification criteria.
 - iii. **Induction Training:** Induction training of all workers to be ensured as per clause 9.1 and HSEP04: *HSE Procedure for Training & Awareness* (Record: Format No. HSEP14:F03)

Only on successfully meeting above criteria, permanent gate passes to be issued.

2. The subcontractor shall strictly adhere to the maximum daily working hours and other requirements as per applicable laws and shall not engage any employee below 18 years of age.
3. The subcontractor shall take special care of the employees affected with occupational diseases under rule 230 and schedule II of BOCW Rules. The employees not meeting the fitness requirement should not be engaged for such job.
4. Ensure that the regulatory requirements of excessive weight limit (to carry / lift / move weights beyond prescribed limits) for male and female workers are complied with.
5. System for Issue of Gate Passes to authorized personnel only shall be ensured at site
6. The subcontractor shall keep accurate and updated records of all manpower preferably in soft form
7. The subcontractor shall ensure appropriate infrastructure for workers as per Clause 8.4.

8.3 PROVISION OF PPEs

1. Adequate numbers of Personnel Protective Equipment (PPEs), will be made available at site & their effectiveness and regular use by all will be ensured
2. The PPEs shall conform to the relevant standards as listed in Annexure 02, and bear ISI mark.
3. The following matrix recommends usage of minimum PPEs against the respective job. For details, the respective OCPs to be referred.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 29 of 162

Sl. No	Type of work	Suggested PPEs
1	Work at height	Double lanyard full body harness with rope grab (as applicable), retractable Fall arrestor (specific cases), Safety nets (single / double)
2	Concrete and asphalt mixing	Nose mask, hand glove, apron, gum boot, goggles
3	Welders/ Grinders/ Gas cutters	Welding/face screen, apron, hand gloves, nose mask and ear muffs if noise level exceeds 90dB. Helmet fitted with welding shield is preferred for welders, safety goggles
4	Stone/ concrete breakers	Ear muffs, safety goggles, hand gloves
5	Electrical Work	Rubber hand glove, Electrical Resistance shoes, Arc-flash resistant suit.
6	Insulation Work	Respiratory mask, Hand gloves, safety goggles
7	Grit/Sand blasting	Blast suit, blast helmet, respirator, leather gloves, safety goggles
8	Painting	Plastic gloves, Respirators (particularly for Spray painting)
9	Radiography	As per BARC guidelines
10	General	Helmets, Safety Shoes Reflective vests, ear plugs, nose masks, safety goggles

- The exact PPEs required for a particular task shall be chosen to ensure there are multiple lines of defense against accident or injury. All applicable safety precautions for a job shall be ensured notwithstanding the duration or perceived importance of the task.
- Additionally, the BHEL safety officer may demand additional PPEs based on specific requirement
- The applicability of PPEs shall be as per the concept of Hierarchy of controls, i.e.: Elimination->Substitution->Engineering Controls->Administrative Controls-PPEs
- Relying solely on PPEs without other applicable controls to be strictly avoided.
- The issuing agency shall maintain register for issue and receipt of PPEs (Format No. HSEP: 14-F06A). All the PPEs shall be checked for quality before issue and the shall be periodically re-checked. The users shall be advised to check the PPEs themselves for any defect before putting on. The defective ones shall be replaced.
- The body harnesses shall be serial numbered.
- All worker should wear reflecting Jacket during both shift Day/Night.
- Where workers are employed in sewers and manholes, which are in use, the subcontractor shall ensure that the manhole covers are opened and ventilated at least for an hour before the workers are allowed to get into manhole, and the manholes so opened shall be cordoned off with suitable railing and provided with warning signals or boards to prevent incident to the public
- Besides the PPEs mentioned above, the persons shall use helmet, safety shoe and reflective vest at all times. The visitors shall use Helmet and any other PPEs as



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date: 25.04.19

Page 30 of 162

deemed appropriate for the area of work.

13. Following color scheme for Helmets to be maintained:

- Workmen: Yellow
- Safety staff: Green or white with green band
- Electrician: Red
- Others including visitors: White

14. The Helmets shall have logo or name (abbreviation of agency name permitted) affixed or printed on the front along with the person's gate pass no. & blood group. An awarded worker shall have reflective logo

8.4 ARRANGEMENT OF INFRASTRUCTURE

The subcontractor is responsible for ensuring and maintaining the required HSE infrastructure at site as described in this Section

8.4.1 DRINKING WATER

- Drinking Water Storage Tanks shall be provided and maintained at suitable places at different elevations / locations to ensure easy accessibility. The tank/container shall be kept on a platform at an elevation of at least 2 feet and should be covered:



- Construction and Quantity:** The design of Drinking Water Storage Tank (DWST) shall be submitted to BHEL for approval prior to initiating construction. Provision of 5 liter water daily for each worker to be maintained.
- Labelling:** DWST should be labeled as "Drinking Water". Date of last cleaning, next due date shall be indicated on the container besides Date of source testing as per IS 10500.
- Cleaning of the DWST shall be ensured at least once in a week. Mild cleaning detergents as used for cleaning vessels shall be applied and scrubbers (3M or equivalent) shall be used for removing scales and deposits on the inside surface. The tank shall be thoroughly cleaned with potable water only before it is refilled.
- Suitability of the water source should be tested as per IS10500.
- For all tanks containing water unsuitable for drinking, prominent "Do Not Drink" signage shall be pasted in English, Hindi and local language.
- In Hot Work and other critical areas, drinking water shall be made available near the activity
- Provision of supplying drinking water to height workers and those working in difficult to reach



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 31 of 162

areas shall be made available through dedicated personnel.

- 8.4.2 **PROVISION OF LATRINES AND URINALS AT SITE** (Ref: Interstate Migrant Workmen (Regulation & Employment and Act, 1979) read with The Inter-State Migrant Workmen (Regulation of employment and conditions of service) central rules, 1980 (PI refer rule no. 42)

LATRINES

1. Latrines shall be provided in every establishment on the following scale, namely: -
 - a. Where females are employed, there shall be at least one latrine for every 25 females;
 - b. Where males are employed, there shall be at least one latrine for every 25 males:

Provided that where the number of males or females exceeds 190, it shall be sufficient if there is one latrine for 25 males or females, as the case may be, up to the first 100, and one for every 30 thereafter
2. Every latrine shall be under cover and so partitioned off as to secure privacy, and shall have a proper door and fastenings.
3. Where workers of both sexes are employed there shall be displayed outside each block of latrine and urinal a notice in the language understood by the majority of the workers '**For Men Only**', or '**For Women Only**', as the case may be.
4. The notice shall also bear the figure of a man or of a woman, as the case may be.

URINALS

5. There shall be at least one urinal for male workers up to fifty and one for female up to fifty employed at a time:
6. Provided that where the number of male or female workmen, as the case may be, exceeds 500 it shall be sufficient if there is one urinal for every fifty females up to the first 500 and one for every 100 or part thereof thereafter.
7. The urinals shall be designed and located so as to ensure privacy.
8. In case a structure encompasses multiple floors, urinals shall be provided suitably for quick access
9. The latrines and urinals shall be conveniently situated and accessible to workers at all times at the establishment.
10. The latrines and urinals shall be adequately lighted and shall be maintained in a clean and sanitary condition at all times.
11. Latrines and urinals other than those connected with a flush sewage system shall comply with the requirements of the public health authorities.
12. Water shall be provided by the means of tap or otherwise so as to be conveniently accessible in or near the latrines and urinals.

8.4.3 WASHING FACILITIES

1. In every workplace, adequate and suitable facilities for washing shall be provided and maintained.
2. Separate and adequate cleaning facilities shall be provided for the use of male and female workers. Such facilities shall be conveniently accessible and shall be kept in clean and hygienic



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 32 of 162

condition and dully illuminated for night use.

3. Overalls shall be supplied by the subcontractor to the workmen and adequate facilities shall be provided to enable the painters and other workers to wash during the cessation of work.

8.4.4 PROVISION OF REST SHELTER FOR WOKERS

Proper Sheds & Shelters big enough to accommodate all possible workers shall be provided for workers to rest during break. Taking rest at height, in activity area and other hazardous locations shall not be allowed.

The drawing of such sheds shall be submitted to BHEL for approval before construction.

8.4.5 MEDICAL FACILITIES

Refer Section B for applicability of requirements pertaining to Clause 8.4.5.1

8.4.5.1 MEDICAL CUM FIRST-AID CENTER

- a) A medical center shall be setup at site with basic facilities for handling medical emergencies. The medical center shall be developed independently by BHEL/an agency as specified in the contract and run jointly by all agencies on proportionate sharing basis as stipulated in the contract.
- b) A qualified medical professional, not less than MBBS, shall be deployed at medical center as stipulated in the contract.(Part-time or full time as decided at the site).
- c) There shall be a full-time trained first aider and a nurse. Depending upon the working hours at the site, First-aider shall be deployed accordingly.
- d) The center shall have all articles as per Schedule IV of BOCW(Central) Rules'1998. In addition,, one Stokes basket stretcher shall be available.
- e) An ambulance shall be deployed for every 1000 persons along with trained driver and accessories as per schedule V of Central BOCW Rules'1998. Depending upon the working hours at the site, First-aider shall be deployed accordingly.
- f) The center shall be adequately equipped for Resuscitation, Immobilisation, Dressing, dealing with poisoning cases including snake and insect-bites and sufficient stock of emergency medicines as prescribed by the qualified medical professional as per point (b)

8.4.5.2 IMPORTANT

- g) If there is no specific mention of responsibility of deployment or setting up of any of the above facilities and operating expenses thereof, BHEL site management shall have the liberty to give this responsibility to any of the contractors on cost sharing basis.
- h) Medical waste shall be disposed as per prevailing legislation (Bio-Medical Waste –Management and Handling Rules, 1998)
- i) Every injury shall be treated, recorded and reported.
- j) All First Aid injuries shall be recorded as per Format No. HSEP:14-F17
- k) List of qualified first aiders and their contact numbers to be displayed at conspicuous places.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 33 of 162

8.4.5.3 FIRST AID

A. In addition to 8.4.5.1 &2, The subcontractor with Boiler&ESP, TG, Civil shall:

1. Provide necessary first aid facilities for every work place.
2. Ensure availability of qualified First-aiders throughout the working hours.
3. Every injury shall be treated, recorded and reported.
4. Refresher course on first aid shall be conducted as necessary.
5. List of qualified first aiders and their contact numbers to be displayed at conspicuous places.
6. All First Aid injuries shall be recorded as per Format No. HSEP:14-F17

B. FIRST AID BOX

1. The first aid box shall be maintained by first aider who shall always be readily available during the working hours of the work place.
2. **Details of First Aid Box:**
 - a) Details of contents of first aid box is given in **Annexure 03**. A slip of contents shall be pasted on the First Aid Box with following details:

Name, Quantity, Expiry Date, Checked by...

- b) First Aider's name and contact no to be displayed on the box.
 - c) The first aid box shall be distinctly marked with a Green Cross on white background.
 - d) The box shall be properly secured with lock & key to avoid misuse
7. The first aid boxes should be placed at various locations so as to make them available within easy reach of hazardous activities and at the quickest possible time.
 8. The subcontractor shall ensure that the Supervisors and Engineers are adequately trained for attending to any emergency.
 9. Monthly inspection of First Aid Box to be conducted by the subcontractor as per Format no. HSEP:14-F01

8.4.5.4 HEALTH CHECK UP

The persons engaged at the site shall undergo health checkup as per the **Format no. HSEP:14-F02** before induction. The persons engaged in the following works shall additionally undergo regular health checkup using same Format at least once in a year:

Height workers	Drivers/crane operators/riggers	Confined space workers
Shot/sand blaster	Welding and NDE personnel	Any person referred by BHEL

8.4.5.4.1 HEIGHT PHOBIA TEST

1. The persons engaged in working at heights (above 2 meters) to be assessed for Height Phobia and associated conditions.
2. Such workers are to be allowed only on successful completion of this test, otherwise they shall be allocated ground based jobs. IDs / Height passes shall be issued to such workers.

8.4.6 PROVISION OF CANTEEN FACILITY



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 34 of 162

Minimum or better facilities to be ensured as per BOCW (Rule 244) / Factories Act, specially taking care of the following:

1. Canteen facilities shall be provided for the workmen of the subcontractor inside the project site.
2. Proper cleaning and hygienic condition shall be maintained.
3. Proper care should be taken to prevent biological contamination.
4. Adequate drinking water should be available at canteen.
5. Fire extinguisher shall be provided inside canteen.
6. Regular health check-up and medication to the canteen workers shall be ensured.
7. Canteen waste to be disposed of in compliance with law
8. Domestic LPG cylinder shall not be used
9. Canteen should be periodically inspected using standard checklist finalized along with BHEL

8.4.7 PROVISION OF ACCOMMODATION / LABOR COLONY

1. The subcontractor shall provide to every workman (within fifteen days of the commencement of the employment of migrant workmen):
 - a) In case he is accompanied by any other member of his family, a suitable barrack so as to accommodate one room having at least a floor area of 10 square meters, a verandah and adequate additional covered space for cooking food as well as one common sanitary latrine, one common bathroom for every three such quarters; and
 - b) In case he is unaccompanied by any other member of his family, a suitable barrack so as to accommodate not more than ten such migrant workmen, having at least a floor area of not less than 6.5 square meters for each such migrant workman making use of the barrack, a verandah and adequate additional covered space for cooking food as well as one common sanitary latrine and one common bathroom for every ten such migrant workmen
2. Every quarter and the barrack shall be so constructed as to afford adequate ventilation, protection against heat, wind, rain and shall have smooth, hard and impervious floor surface.
3. The quarters or the barracks, as the case may be, shall be at a convenient distance from the establishment and shall have adequate supply of wholesome drinking water.
4. The area in which the quarters and/or barracks are located as well as the latrines and bathrooms provided therein shall be kept in a clean and sanitary condition at all times.
5. Regular housekeeping of the labor colony shall be ensured.
6. Availability of Bathing/ washing bay to be ensured



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 35 of 162

7. Room ventilation and safe electrification to be ensured
8. MSDS of LPG shall be put up prominently and shall be included in the induction training also.
9. The labor colony shall be secure so that only authorized persons have access to it.
10. Availability of local market to be ensured by the Sub-contractor
11. A "Suggestion Register" shall be made available at the labor colony for workers. The feedback shall be reviewed on weekly basis and acted upon.
12. Labor colony shall be inspected fortnightly by Subcontractor Safety Officer & HR executive, and report submitted to BHEL as per Format No. HSEP:4-F16
13. **Facility of Crèches** – to be provided wherein more than fifty female workers are deployed
14. Provisions of Clause 8.4.1, 8.4.2 and 8.4.3 shall be applicable on labor colony as well

8.4.8 PROVISION OF EMERGENCY VEHICLE

Dedicated emergency vehicle shall be made available at workplace by subcontractor for evacuation of victim from site.

However, Ambulance shall be used exclusively for transporting victim to hospital

8.4.9 PEST CONTROL

Regular pest control should be carried out at all offices, mainly laboratories, canteen, labor colony and stores by the subcontractor.

8.4.10 SCRAPYARD

1. Scrapyard shall be developed by subcontractor to store metal scrap, wooden scrap, waste, hazardous waste.
2. Scrap/Waste shall be segregated as Bio-degradable and non-bio-degradable and stored separately.

8.4.11 ILLUMINATION

1. The subcontractor shall provide adequate lighting facilities e.g. flood lighting, hand lamps, area lights etc. to ensure adequate lighting at all work places & their approaches including passage ways as per IS: 3646 (Part-II) at all times. Indicative recommended values are given below:

S. No.	Location	Lux Level
A.	Construction Site	
1	Outdoor areas like store yards, entrance and exit roads	20
2	Platforms	50
3	Entrances, corridors and stairs	100
4	General illumination of work area	150
5	Rough work like fabrication, assembly of major items	150



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 36 of 162

6	Medium work like assembly of small machined parts	300
7	Fine work like precision assembly, precision measurements etc.	700
8	Sheet metal works	200
9	Electrical and instrument labs	450
B.	Office	
1	Outdoor area like entrance and exit roads	20
2	Entrance halls	150
3	Corridors and lift cars	70
4	Lift landing	150
5	Stairs	100
6	Office rooms, conference rooms, library reading tables	300
7	Drawing table	450
8	Manual telephone exchange	200

In case any area is not mentioned above, the applicable illumination for the same shall be specified by BHEL based on applicable standards and international norms

1. Level of illumination shall be checked periodically using a calibrated lux meter and recorded for each work area on minimum weekly basis as per Format No. HSEP:14-F21
2. Lamp (hand held) shall not be powered by mains supply but either by 24V or dry cells.
3. Lamps shall be protected by suitable guards where necessary to prevent danger, in case of breakage of lamp.
4. Emergency lighting provision for night work shall be made to minimize danger in case of main supply failure.

9. HSE TRAINING & AWARENESS

9.1 HSE INDUCTION TRAINING

1. All persons entering into project site shall be given HSE induction training before being assigned to work, which shall be imparted through audio-visual medium and shall be of minimum 2-hour duration.
2. Any single trainee batch size should not exceed 40.
3. Proper safety wear & gear must be issued to all the workers being registered for the induction (i.e., Shoes/Helmets/Goggles/Leg guard/Apron etc.)
 - i. They must arrive fully dressed in safety wear & gear to attend the induction.
 - ii. Any one failing to conform to this safety wear& gear requirement shall not qualify to attend.
4. In-house induction training subjects shall include but not limited to:



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 37 of 162

- i. Briefing of the Project details and importance of employee for the project and for the nation.
 - ii. Safety related cardinal rules, objectives and targets.
 - iii. Site HSE rules.
 - iv. Site HSE hazards and aspects.
 - v. First aid facility.
 - vi. Emergency Contact No. and procedures
 - vii. Details of Fire prevention and emergency response systems & procedures at site.
 - viii. Requirement of incident / near miss reporting by all.
 - ix. Accident case studies
 - x. Rules to be followed in the labor colony (if applicable)
5. Evaluation to be carried out after training and induction training to be repeated in case of failure of participant in evaluation
6. On completing subcontractor's in-house HSE induction, each employee shall sign an induction training form (format no. HSEP: 14-F03) to declare that he had understood the content and shall abide to follow and comply with safe work practices. They may only then be qualified to be issued with a personal I.D. card, for access to the work site (provided Health Checkup is over).

9.2 HSE TOOLBOX TALK

1. HSE Tool Box talk shall be conducted by frontline foreman/supervisor of subcontractor to specific work groups daily prior to the start of work. The agenda shall consist of the following:
 - i. Visual checkup of workers regarding health, any signs of fatigue, intoxication etc.
 - ii. Details of the job being intended for immediate execution.
 - iii. The relevant hazards and risks involved in executing the job and their control measures.
 - iv. Specific site condition to be considered while executing the job like high temperature, humidity, unfavorable weather etc.
 - v. Recent non-compliances observed.
 - vi. Appreciation of good work and warning for any unsafe acts done by any person.
 - vii. Any doubt clearing session at the end
2. Record of Tool box talk shall be maintained as per Format no. HSEP:14-F04

9.3 TRAINING ON HEIGHT WORK

Due to the large percentage of fall from height in incidents, training of minimum 2-hour duration on height work shall be imparted to all height workers by in- house / external faculty for every batch of new inductees. The training shall include following topics:

1. Inspection of work area, access and egress w.r.t height hazards
2. Use of PPEs; use of fall arrester, retractable fall arrester, life line, safety nets etc.
3. Safe climbing through monkey ladders.
4. Inspection of PPEs.
5. Medical fitness requirements.
6. Mock drill on rescue at height.
7. Dos & Don'ts during height work.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 38 of 162

8. Accident case studies

In case, above is organized by BHEL, proportionate cost shall be borne by subcontractors

9.4 HSE TRAINING DURING PROJECT EXECUTION

1. HSE training shall be arranged by subcontractor as per the need of the project execution and recommendation of BHEL.
2. The topics of the HSE training shall be as follows but not limited to:
 - i. Hazards identification and risk analysis & Identification of Environmental Aspects / Impacts
 - ii. Work Permit System
 - iii. Learning from past incidents
 - iv. First aid, Firefighting & Fire-warden training
 - v. EMS and OHSMS
 - vi. T & Ps fitness and operation
 - vii. Electrical & Chemical safety
 - viii. Welding, NDE & Radiological safety
 - ix. Material handling.
3. Safety awareness and on-the-job training programmes shall be carried out at site for all workers periodically. Periodicity to be decided by BHEL but shall be minimum once in six months
4. Penalty Training – In case of any incident, the involved person, group or agency shall undergo a penalty HSE training for a minimum period of 2 hrs or as decided by BHEL.
5. In case it is not possible to provide training to all workers at once, same shall be imparted in Batch-wise manner so as to cover all workers with specified periodicity.
6. An up-to-date record to be maintained with attendance of participants and trainers preferably in soft copy as per Format No. HSEP:14-F03.
7. Every employee of agency should be provided at least 2 hr. safety training in every month.

In case, above is organized by BHEL, proportionate cost shall be borne by subcontractors

10. HSE PROMOTION: SIGNAGE, POSTERS, COMPETITION, AWARDS ETC

10.1 DISPLAY OF HSE POSTERS AND BANNERS

Site shall arrange appropriate posters, banners, slogans in local/Hindi/English languages at work place.

10.2 DISPLAY OF HSE SIGNAGE

Appropriate HSE signage shall be displayed at the work area to enhance awareness of HSE workmen and passersby about the work going on and do's and don'ts to be followed.

10.3 COMPETITIONS ON HSE, AWARDS & REWARDS



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 39 of 162

1. Subcontractor shall arrange competitions (slogan, poster, essay etc.) on HSE for workers and employees from time to time (Safety day, World Environment Day etc. minimum one such function each month) and winners will be suitably awarded during the functions.
2. Subcontractor shall identify workers following good HSE practices and reward them from time to time as encouragement to follow good HSE practices.
3. Alternatively, if a common monthly function is organized at site, subcontractor shall participate in the same so that a minimum frequency of one such function per month is maintained.

10.4 HSE AWARENESS PROGRAMMES

Subcontractor shall arrange HSE awareness programmes periodically on different topics including medical awareness for all personnel working at site from time to time including officials involved in execution.

11. HSE COMMUNICATION AND PARTICIPATION

11.1 MONTHLY HSE REPORTING

1. HSE activities shall be reported to BHEL monthly as per Format no. HSEP: 14-F05. The reporting medium can be hard/soft as per BHEL requirement.
2. The period of reporting shall be 25th of the preceding month to 24th of the present month and report shall be submitted by the end of the calendar month or as conveyed by BHEL.
3. BHEL can modify the reporting requirements as per requirement

11.2 HSE EVENT REPORTING

1. Important HSE events like HSE Training, Mock / Fire/Rescue Drills, Medical camp etc. organized by subcontractor shall be reported to BHEL in detail with photographs
2. Celebration of important days like National Safety Day, World Environment Day etc. shall also be reported likewise.

11.3 HSE INCIDENT REPORTING

All incidents (near misses, property damage, first-aid cases, minor, major and fatal incidents) shall be reported to BHEL as they happen through SMS and Hard/Soft copy as per Format No. HSEP: 14-F22

11.4 HSE SUGGESTIONS

All workers and employees to be encouraged to provide suggestions for improvement in



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 40 of 162

Health, Safety & Environment at site. The suggestions to be recorded in a "Suggestions Register". Suggestions to be reviewed and those having potential of significant beneficial effects are to be implemented, and recognition / award to be given to the individual.

11.5 CLIENT COMMUNICATON

All HSE related communication from BHEL, customer / external statutory and regulatory agencies to be handled on priority. The relevant issues to be resolved in expeditious manner

11.6 RECORDS OF COMMUNICATON

Records of all communication and their responses as detailed above shall be maintained by subcontractor in hard / soft copy and produced when required.

12. INCIDENT REPORTING, INVESTIGATION & CORRECTIVE ACTION

1. A conducive environment for reporting of near misses and other incidents shall be developed at site through system of rewards etc.
2. Priority to be given to ensure medical treatment of the victim. Victim to be given immediate First Aid and transported to Medical Facility in a well-equipped Ambulance
3. All incidents, as they happen, shall be reported to BHEL immediately over phone/SMS/Whatsapp/mail and then in Format No. HSEP:14-F22 within 24 hrs. of occurrence. Immediate SMS shall be sent to concerned Package In-charge with following Details:

- a. Project & Customer Name:
- b. Subcontractor Name & Scope:
- c. Incident Area:
- d. Number of Injured / Fatalities:
- e. Date & Time of Accident:
- f. Incident Description in few lines:

No incident shall be hidden

4. Records of all incidents shall be maintained in hard / soft copy as per Format No. HSEP:14-F23.
5. For all incidents:
 - a. The incident area, equipment / tools involved, documents & records etc. shall be maintained as-it-is pending investigation
 - b. Root Cause Analysis (RCA) to be conducted and corresponding Corrective / Preventive Action (CAPA) ensured
 - c. Responsibility shall be assigned and action to be taken against the erring individual
 - d. In case presence of manufacturer of the equipment involved is required, subcontractor will arrange the same



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 41 of 162

- e. All expenses pertaining to the RCA / CAPA shall be borne by the subcontractor
6. RCA and CAPA reports of all near misses and minor injuries shall be identified and report submitted to BHEL within 7 days of occurrence.
7. For incidents, where worker does not resume duty within 48 hours of occurrence, Joint investigation along with BHEL shall be conducted within 7 days, and CAPA ensured.
8. Corrective action shall be immediately implemented at the work place. Work shall be put on hold in the area till corrective actions are verified by BHEL
9. All incidents, their Root Cause Analyses and Corrective actions shall be recorded, and analyzed so as to identify weak areas and actions to be taken to reduce the incident trend.

13. SAFETY DURING WORK EXECUTION

13.1 HSE SYSTEMS AND PROCEDURES

BHEL Power Sector HSE Management System (HSEMS) shall be referred for controlling hazards, aspects, and carrying out HSE activities at site. Subcontractor shall get familiar with and follow the HSEMS documents provided by BHEL which include the follows:

13.1.1 HSE PROCEDURES:

All HSE Procedures defined in HSEMS, as referred in various sub-clauses of this Section as given in Annexure 01

13.1.2 PERMIT TO WORK (PTW) SYSTEM

1. The following activities shall be carried out by the subcontractor strictly after obtaining Permit to Work (PTW) from BHEL
 - i. General Work Permit (**Format No. HSEP14-FP01**)
 - ii. Height working (**Format No. HSEP14-FP02**)
 - iii. Hot working (**Format No. HSEP14-FP03**)
 - iv. Confined space Work (**Format No. HSEP14-FP04**)
 - v. Excavation more than 2-meter depth (**Format No. HSEP14-FP05**)
 - vi. Radiography / Radiation Work (**Format No. HSEP14-FP06**)
 - vii. Heavy / Complex / Critical Lifting Activity (**Format No. HSEP14-FP07**)
 - viii. Night / Holiday Work (**Format No. HSEP14-FP08**)
 - ix. Material Loading / Unloading Permit (**Format No. HSEP14-FP09**)
 - x. Grating / Safety Net / Safety Facility Removal Permit (**Format No. HSEP14-FP10**)
 - xi. Live Electrical Maintenance etc. - Lockout / Tag (**Format No. HSEP14-FP07**)



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 42 of 162

2. The above list is not exhaustive. BHEL reserves right to introduce additional Permits or modify requirements for usage of existing Permits. The conditions for using the Permit are specified in the Format (General Requirements).
3. Where customer is having separate Work Permit System the same shall be followed in conjunction to ensure all activities and checks are covered in all systems.
4. Permit applicant shall apply for work permit of particular work activity at particular location before starting of the work along with Job Hazard Analysis.
5. All Permit signatories shall physically visit the work area and check that all the safety control measures necessary for the activity are in place. Only then the permit shall be issued.
 - a. Signatory shall physically visit the area of work and ensure all required safeguards before signing the Permit
 - b. Signatory shall periodically visit the area to confirm the availability of required safeguards throughout the currency of the permit
 - c. In case any Permit requirement is not available, work will be stopped till it is made available
6. Permit holder shall implement and maintain all control measures during the period of permit. The permit will be closed after completion of the work and submitted to BHEL.

13.1.3 Operational Control Procedures

1. All applicable OCPs (Operational Control Procedures) as identified from outcomes of HIRA, Aspect / Impact studies and BHEL inputs will be followed by subcontractor. This will be done as part of normal scope of work.
2. Illustrative list of such OCPs is given in Table 13.1 and same will be made available to subcontractor by BHEL during work execution at site.
3. In case any other OCPs are required or existing ones need to be modified in order to control the risks / impacts associated with any activity during the execution of work subcontractor shall prepare / update and follow the same with information to BHEL.

Table 13.1 - LIST of Reference OCPs

No.	Topic	No.	Topic	No.	Topic
0	General Safety	20	Oil flushing	40	Gas distribution test
1	Handling of chemicals	21	Alkali boil out	41	Cleaning of Hotwell / Deaerator
2	Electrical safety	22	Steam blowing	42	Electrical maintenance
3	Energy conservation	23	Working in confined area	43	O&M of control of AC plant & system
4	Welding and gas cutting operation	24	Operation of passenger lift, material hoists & cages	44	Material preservation
5	Fire safety	25	Vehicle/ Crane maintenance	45	Electro-resistance heating
6	Use of hand tools	26	Radiography	46	Blasting
7	First aid	27	Waste disposal	47	Transformer charging



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 43 of 162

8	Food safety at canteen	28	Handling & storage of mineral wool	48	Handling of battery system
9	Use of cranes	29	Working at night	49	DG set
10	Storage and handling of gas cylinders	30	Computer operation	50	Sanitary maintenance
11	Manual arc welding	31	Storage in open yard	51	Piling rig operation
12	Use of helmets	32	Drilling, reaming and grinding(machining)	52	Passivation
13	Good house keeping	33	Stress relieving	53	EDTA Cleaning
14	Safe excavation	34	Hydraulic test	54	Chemical cleaning of Pre boiler system
15	Working at height	35	Trial run of rotary equipment	55	Boiler Light up
16	Filling of hydrogen in cylinder	36	Batching	56	Rolling and Synchronization
17	Illumination	37	Cable laying/tray work	57	Loading of Unit
18	Handling and erection of heavy metals	38	Spray insulation	58	Air compressor
19	Acid cleaning	39	Compressor operation	59	Hydra Operation

13.2 ACTIVITY SPECIFIC REQUIREMENTS FOR SAFETY:

All Work shall be commenced only after taking the respective Work Permits (as applicable) and precautions as per relevant codes, systems and OCPs in order to ensure safe conditions throughout the duration of work. Additionally, activity specific safeguards as per this section shall be followed.

13.2.1 WORK AT HEIGHT:

1. All work at height above 2 meter above ground level without complete platforms, handrails and other related fall protection shall require a work permit in the prescribed form. This shall require approval by the competent authority. The HSE officer of sub-contractors shall follow the checklist religiously by physically verifying the condition of the work area before recommending for approval.
2. Prior to the start of work at elevation, the HSE Officer involved with the work must meet the work supervisor to review the scope of work, and must review all the possible fall hazards and effective safety responses. The evaluation / analysis must be documented and kept on file and on site by the HSE Officer.
3. Whenever a fall hazard or other exposure exists for working at heights more than 2.0m/6ft, the nature and scope of work will be evaluated for conditions and environmental factors before selecting the appropriate fall protection system (active, passive or a combination of measures, as appropriate).



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 44 of 162

4. All Engineering and Administrative Controls including barricading, safe platform, Safety Nets etc. shall be made available at work location. Under no circumstances, there shall be total reliance on PPEs only

5. Safety Nets

- a. Contractor shall maintain sufficient stock of Safety Nets for deployment
- b. Safety Nets as per IS: 11057:1984 should be used extensively for prevention / arrest men and materials falling from height.
- c. The safety nets shall be fire resistant, duly tested and shall be of ISI marked.
- d. Safety Nets shall be deployed below all platforms where height work is envisaged. Duration of work, delay shall be no excuses for non-installation of Safety Net
6. Reaching beyond barricaded area without lifeline support, moving with support of bracings, walking on beams without support, jumping from one level to another, throwing objects and taking shortcut must be discouraged.
7. Monkey Ladder shall be fitted with cages. Rope ladder should be discouraged.
8. In case of pipe-rack, persons should not walk on pipes and walk on platforms only.
9. In case of roof work, walking ladder/ platform should be provided along with lifeline and/ or fall arrestor.
10. For chimney or structure painting, both hanging platform and men should be anchored separately to a firm structure along with separate fall arrestor.
11. The procedures for the safety response to identified fall hazards developed and rescue plans must be reviewed with all individuals exposed to the hazards.
12. The HSE Officer must establish an inspection process of fall protection systems. Some equipment requires documented inspections by its manufacture on a regular schedule. Such equipment must have evidence of the inspection and re-certification process on it. This information must be reviewed before the equipment is actually used. Individuals must visually inspect the fall protection equipment before each use. Failure to complete this inspection process could result in serious injury or death.
13. Immediately remove from service any fall protection equipment that is identified as defective, damaged, or has been subjected to an impact. Damaged fall protective equipment must be destroyed to prevent re-use and not be discarded into trash containers, as the worn or damaged equipment could be unintentionally re-used.
14. Aerial lifting devices, excluding scissor lifts require the use of full body harnesses and lanyards in any elevated position.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 45 of 162

13.2.1.1 Personnel fall protection system must include:

a. Safety Harness

All height workers must use Safety harness with double lanyards. The primary lanyard is never unhooked until the secondary lanyard is secure. The design of the working platform should be such that **under no circumstances, worker should have both lanyards unhooked while at height.**

b. Lanyard

- i. The type of work and the environment conditions determine lanyard and lifeline selection. If welding, chemical cleaning that may damage lanyards, connectors or lifelines, sandblasting, etc., either protect the components or use more appropriate type of system.
- ii. Lanyards and lifelines must incorporate, or be used with, an appropriate deceleration (shock absorbing) device. Deceleration devices include rope grabs, rip-stitch lanyards, specially woven lanyards, tearing, or deforming lanyards, automatic self-retracting lifelines and lanyards which dissipate or limit the energy imposed on the employee during fall arrest.
- iii. Once in use, the system's effectiveness is to be monitored. In some cases, a program for cleaning and maintaining the system may be necessary. Lanyard and lifelines must use locking snap hooks only and under no circumstances must two lanyard snap hooks be connected.

c. Lifeline

All lifelines in general are to be made of min 8mm dia steel rope (plastic coated) and tied to columns with 3 clamps at each end. Wherever columns are not available to tie the lifelines, the vertical posts as per the design below are to be provided after carrying out drop load test initially. A load of 240kg to be dropped off the mid-point of lifeline in this test.

d. Lifeline Post

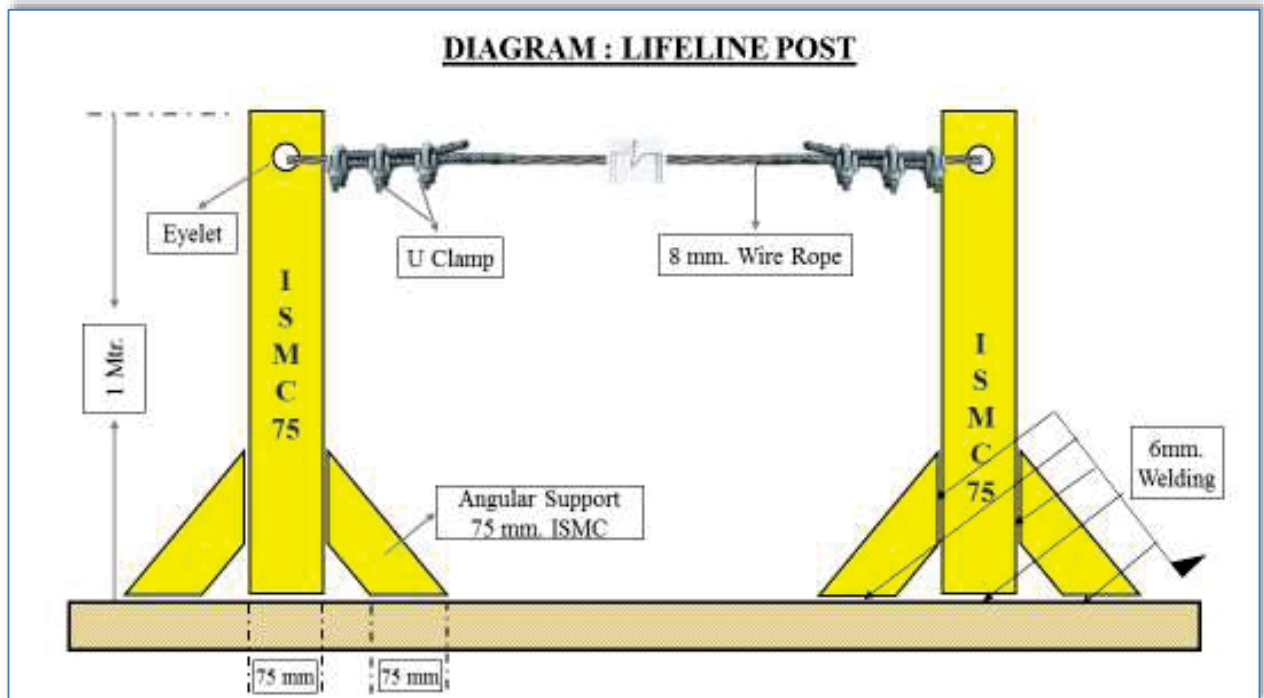


Fig. 13.2.1.1 Lifeline Post

- i. The support at vertical post shall be fixed at end-to-end. The maximum length of one end to another end shall be 18 meters
- ii. If the length of a lifeline is more than 18 meters, then intermediate vertical post(s) are to be used. Such intermediate post(s) will act as supports and the lifeline rope should simply pass through the eyelets (holes) of such supports without being anchored
- iii. The lifeline need not be wrapped / clamped to any intermediate post
- iv. Such intermediate posts must be used at an interval of every 18 meters
- v. The post(s) in which the original lifeline is to be installed should be capable of sustaining a tensile stress of 2268 Kgs
- vi. In a horizontal lifeline installation, maximum allowable sagging is 500-600 mm
- vii. For a single spun lifeline, no more than 2 persons are allowed to work; for more than two workers, another lifeline should be installed
- viii. Horizontal lifeline should be so installed that it does not impede safe movement of workers
- ix. All the installation work must be carried out by competent person with adequate knowledge

13.2.1.2 Working Platform

1. Working platforms, gangways and stairways shall be so constructed that they do not sag unduly or unequally and if the height of the platform gangways provided is more than 3.6 m above ground level or floor level, they shall be closely boarded and shall have adequate width, which shall not be less than 750 mm and be suitably fenced.

2. Precautions against the fall of Materials, Persons and Collapse of Structures



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 47 of 162

- i. Every opening in the floor or a building or in a working platform shall be suitably barricaded to prevent the fall of persons by providing suitable fencing or railing whose minimum height shall be 90 cm.
- ii. Adequate precautions should be taken such as the provision of fencing, or barriers to protect any person who might be injured by the fall of materials, or tools or equipment being raised or lowered. Cradle may be used for lifting materials - however this shall be made of MS angles and flats only and duly certified by the HSE officer. Operators may also use designed containers for lifting small tools.
- iii. Guardrails (including scaffolding) erected over/adjacent working areas must have the guardrails screened (opening < 0.5), to prevent material from falling outside the platform/decking.
- iv. Guardrails must be able to withstand a 200-pound force exerted in any one direction.
- v. Where necessary to prevent danger, guys, stays or supports should be used or other effective precautions should be taken to prevent the collapse of structures or parts of structures that are being erected, maintained, repaired, dismantled or demolished.
- vi. All openings through which workers are liable to fall should be kept effectively covered or fenced and indicated in the most appropriate manner.
- vii. Guardrails and toe-board/barricades and sound platform conforming to IS: 4912-1978 and other Indian laws and regulations as depicted below should be provided.

Guardrail system

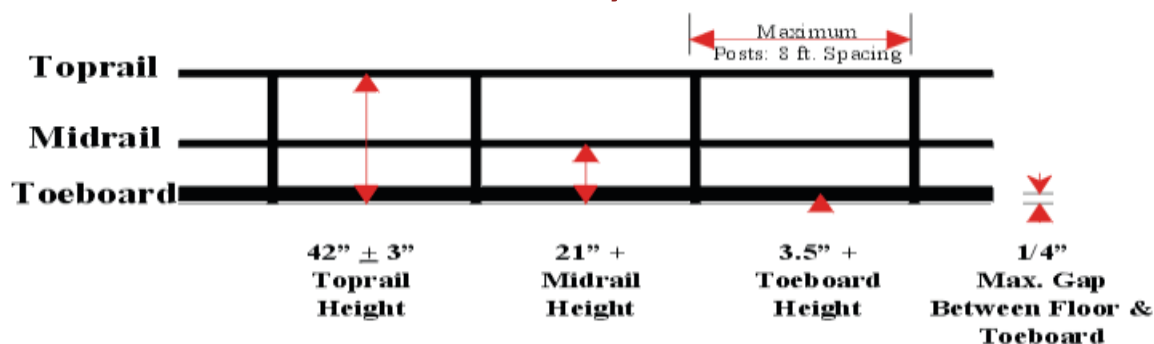


Fig. 13.2.1.2 Guard Rail System

- viii. Guardrails shall be provided to protect workers from falling from elevated work places. The rails are generally made of MS pipes of suitable dia. Rebar shall not be used for any handrails, ladder or cover purpose. Wherever the guard-rails and toe-boards cannot be provided:
 - a. adequate safety nets or safety sheets shall be erected and maintained; or
 - b. adequate safety harnesses shall be provided and used and / or
 - c. adequate fall arrestor shall be provided and used.

As mentioned under PPE clause, all these PPEs shall be defect free and regularly inspected for any defect. The full body safety harness shall have double lanyard only with max 1.8m length.

- ix. The monkey ladders shall have sufficient fall arrestors. Adequate lifelines of 8mm steel wire



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 48 of 162

rope shall be provided across the work area.

- x. The HSE officer shall recommend appropriate PPEs after analyzing hazards and risks involved.

13.2.1.3 Scaffolding

All scaffolds shall be conformant to the relevant standards including IS 3696 and IS 4014 as applicable. A sketch of the scaffolds proposed to be used shall be prepared and approval of the BHEL Engineer obtained prior to construction / use.

General

1. The scaffolding work must be carried out by a competent person, who shall train the scaffold users on safety aspects
2. All scaffolds shall be erected / dismantled by scaffolding crew under direct supervision of competent scaffolding supervisors.
3. All scaffolds shall be capable of supporting 4 times maximum intended load and erected on sound, rigid footing, capable of carrying the maximum intended load without settling or displacement. Bamboo scaffolding is not permitted for use on site.
4. Each employee on the scaffold shall use an approved safety harness attached to an independent lifeline. The lifeline is to be securely attached to substantial members of the structure (not the scaffold itself) or to securely rigged lines, which shall safely suspend a worker in event of a fall.
5. Guard rails and toe boards shall be installed on all open sides and ends of platforms more than (2) meters above ground or floor
6. Scaffold planks must be at least 5 cm x 25 cm (2" x 10") full thickness lumber scaffold grade or better.
7. Scaffold planks shall not span distances greater than 2.5 meters (8 feet).
8. Scaffold planks shall extend over end supports not less than 6 inches nor more than 12 inches and be secured to the scaffold. Scaffolding and accessories with defective parts shall be immediately repaired or replaced.
9. All scaffolding must be a minimum of two planks wide. No one may work from a single plank.
10. Scaffold planks must be inspected before use. Planks that have been damaged must be removed from the site.
11. Access ladders must be provided for each scaffold. Climbing the end frames is prohibited unless the design incorporates an approved ladder.
12. Adequate mudsills or other rigid footing capable of withstanding the maximum intended load must be provided.
13. Scaffolds more the 6 meters (20 feet) in height must be tied to the building or structure at intervals which do not exceed 4 meters (13 feet) vertically and 6 meters (20 feet) horizontally.
14. Do not overload scaffolds. Material should be brought up as needed. Scaffolding must not be loaded in excess of its rated capacity.
15. Barrels, boxes, kegs, blocks or similar unstable object must never be used as work platforms or to support scaffold.
16. Where persons must work under or pass under a scaffold then a 18 gauge wire mesh screen must be installed between the toe board and guard rail.
17. Employees exposed to overhead hazards while working on a scaffold will be protected by 5 cm (2") thick planks.
18. Wooden/bamboo ladders shall not be allowed at any cost. Ladder's rungs shall be fitted /welded properly. Before every use the rungs should be checked for safe use.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-

ER
Rev.: 00

Date:25.04.19

Page 49 of 162

19. Wooden scaffolds shall not be used in areas where fire / fire products are expected
20. Ropes made of jute / Plastic and other fire prone material shall not be used to tie up scaffolding components together
21. The platform should have permanent hand rail and mid rail with Toe board without fail.
22. All platforms are to be tightly planked for the full width of the scaffold, except as may be necessary for entrance openings. Platforms shall be secured in place.
23. On suspension scaffolds designed for a working load of 500 pounds, no more than two workers are permitted to work on the scaffold simultaneously. On suspension scaffolds with a working load of 750 pounds, no more than three workers are permitted on the scaffold simultaneously.

24. Requirements for different types of Scaffolds:

A. Suspended Scaffold

- i. Suspended scaffolds are platforms suspended by ropes, or other non-rigid means, from an overhead structure.
- ii. Requirements for use are to be preapproved by HSE Head, under a specific Permit to Work.

B. Rolling Scaffolds

- i. The height of rolling scaffolds shall not exceed three times the minimum base dimension.
- ii. The minimum base dimension of rolling scaffold will be 1.25 meters (4 feet).
- iii. Adequate help must be provided when moving a rolling scaffold.
- iv. Secure or remove all loose materials, equipment and tools before moving a rolling scaffold.
- v. No one is permitted to ride a rolling scaffold when it is being moved. Castor brakes must be locked-on when the scaffold is not being moved.


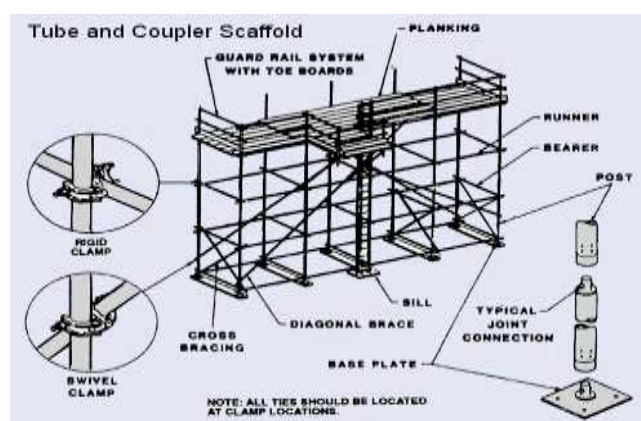


Fig. 13.2.1.3 Types of Scaffolds

25. Scaffold Tagging

Scaffolds being erected, modified or dismantled must be tagged as suitable for use. The scaffolds can only be accessed by those involved with the process.

GREEN scaffold tag- shall be fixed when scaffold is complete and safe for use, signed and dated by

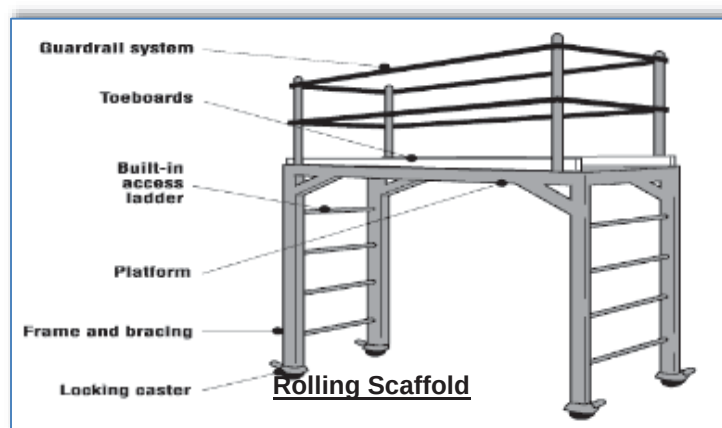

**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-

ER
Rev.: 00

Date:25.04.19

Page 50 of 162

the scaffolding competent person daily.

RED scaffold tag – to be fixed if scaffold is in some way defective and cannot be used or is still under erection.

Examples of scaffold tags:



Fig. 13.2.1.4 Scaffold Tagging

13.2.1.4 Ladder Safety

A sketch of the ladders proposed to be used shall be prepared and approval of the BHEL Engineer obtained prior to construction / use

Safe Use of Ladders:

1. Fall protection is required when working on a ladder above 2 meters and when climbing above nearby guardrails.
2. Ladders must be inspected prior to use and by a competent person quarterly, with documentation.
3. Use portable ladders for height up to 4 M only
4. Provide fixed ladders for height above 4 M
5. Place the ladder at an angle of 75 degrees (approx.) from the horizontal (1:4)
6. Extend ladder at least 1 M above the top landing
7. Secure top and bottom of the ladder firmly to prevent displacement- anti skid lining at the bottom
8. Ensure that the width of the ladder is not less than 300 mm and distance between rungs is not more than 300 mm
9. Provide landings of minimum size 600 x 600 mm at intervals not more than 6 M for fixed ladders. Check the ladders daily for any defects
10. Ensure that the areas around base and top of the ladder are clear. Getting on and off the ladder is more hazardous than using it. Use a mudsill if the ladder is to rest on soft, loose or rough soil
11. Do not use ladders of conducting material near power lines, and only use ladders near power line or other energize system with exposed parts if they are confirmed locked-out and de-



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date: 25.04.19

Page 51 of 162

energized.

12. Stand no higher than the fourth rung from the top for carrying out any job standing on a ladder.
13. Never reach out from a ladder to perform work where your belt buckle protrudes past the ladder rung.
14. Always face the ladder while climbing up or down
15. Maintain three-point contact while climbing up or down a ladder i.e. two hands and one foot or two feet and one hand on the ladder at all the times.
16. Avoid climbing up or down a ladder while carrying anything in hands. Lift tools, equipment and materials with a rope.
17. Work from portable and extension ladders near guardrail where fall expose exists over the guardrail regardless of height, and above 2.0 mtr. heights from the working/walking surface will require the use of personal fall arrest equipment

13.2.2 EXCAVATION & CIVIL WORKS

All safety precautions shall be taken for foundation and other excavation marks as per IS-3764.

13.2.2.1 Excavation

The following safety measures are to be ensured before and during excavation:

1. All Excavation activities more than with depth of 1.22 meter or more shall require and Excavation Work Permit
2. Check for underground utilities like electrical / telephone cables, sewage, water lines and proper care has to be exercised to protect and prevent damage to it
3. Proper and adequate slope is maintained while excavating
4. Adequate shoring or sheeting is done wherever require to prevent soil sliding
5. Safe access through ladder or steps for exit & entry to excavation
6. No material /excavated soil is kept within one meter from the edge
7. Safe way is planned and provided for movement of HEM /transport equipment near excavation
8. Safety helmet and shoes/gum boots are provided and worn by the workmen at excavation works
9. Dewatering arrangement is made where water seepage is prevailed.
10. Stop blocks are provided to avoid vehicles reversing into the excavated trenches
11. Danger signs /Caution boards are displayed at work spot
12. Barricading is provided at excavated pits



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-

ER
Rev.: 00

Date:25.04.19

Page 52 of 162

Soil Type	Height/Depth ratio	Slope Angle
Stable Rock	Vertical	90 deg.
Type A	$\frac{3}{4} : 1$	53 deg.
Type B	1 : 1	45 deg.
Type C	$1\frac{1}{2} : 1$	34 deg.

Determining Soil Type		
Type	Description	Examples
A	Cohesive soils with an unconfined compressive strength of 1.5 tons per square foot or greater.	Clay, silty clay, sandy clay, clay loam and in some cases; silty clay loam and sandy clay loam.
B	Cohesive soils with unconfined compressive strength greater than 0.5 tsf but less than 1.5 tsf.	Angular gravel (similar to crushed rock), silt, silt loam, sandy loam and, in some cases silty clay loam and sandy clay loam.
C	Cohesive soils with unconfined compressive strength greater than 0.5 tsf or less.	Granular soils such as gravel, sand and loamy sand; submerged soil or soil from which water is freely seeping; submerged rock that is not stable.

Fig. 13.2.2.1 Excavation Reference

13.2.2.2 Piling

Ensure the following precautionary measures before starting piling works:

1. Inspection of piling equipment by responsible person for its condition before initiating piling operation.
2. Checklist and OCP for piling to be prepared using manufacturer's instructions and used
3. Testing and its certification wire ropes, slings, D-shackles, chain pulley blocks using in the process of piling work by competent person
4. Adequate support and secured foundation of the piling equipment to avoid toppling
5. Hoses should be lashed and adequately secured
6. Proper work platform is to be provided on piling frame
7. Safe work procedures and close supervision to prevent unsafe acts of operators/any unsafe conditions that may arise
8. Only experienced and trained operators are engaged for the piling operation
9. Provision of Personal Protective Equipment (PPE) like safety shoes/gumshoes/safety helmet/safety belt etc. and its use by their workmen.
10. Special care and precautions If work is near electrical live cables/ electrical equipment
11. Cordoning of work area to prevent un authorized entry
12. Guarding of revolving parts
13. Specific measures to prevent over turning of pile driver/missing of hammer/ hammer movement out of range

13.2.2.3 Batching

Following Safety considerations for batching plant are to be ensured:

1. Modern type batching plant should be used in which all the moving parts are protected and



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 53 of 162

emergency and safety features are incorporated.

2. Installation of external Electric moto-vibrators in the feeding hopper of all batching plants to reduce human intervention.
3. Installation of safety devices like pull-chord on both the sides of conveyor for stopping the conveyor in emergency
4. Workers carrying cement / sand to be given appropriate PPEs like respiratory masks & gloves.
5. Conveyor belt/rotating parts must be guarded properly.
6. Safety awareness shall be inculcated in workmen about the risk involved in rotating parts.
7. The agency shall ensure to erect the batching plant as per drawing including installation of all safety devices as provided by manufacturer and witnessed by BHEL Engineer in charge before starting of machine in future.
8. Safety audit to also focus on Batching plant.
9. The site shall impose penalty on the agency who has violated the safety norms as per contract.

13.2.2.4 Mobile Plant

Mobile plant includes tractors, trailers, dumpers, excavators, bulldozers, road rollers etc. for earthmoving purpose and concrete mixers, concrete transit mixtures, concrete pumps etc for concreting purpose. Due to the very nature of their function and movement in difficult terrains, congested areas, working in tandem with manual work and other operations the danger is inherent. Reverse horn is compulsory for all earth moving machineries.

Following Safety measures to be ensured for Mobile Plant:

1. Where movement around site is involved, routes should be planned, obstruction free and well maintained
2. Observe specified speed limits
3. Operating personnel should be aware of associated risks and its preventive measures
4. Only experienced, trained and authorized persons with valid license (wherever applicable) should operate the mobile equipment/vehicles
5. Provide and use Warning lights and reverse horn for cautioning the people around
6. Operation should be on level and stable ground with adequate working clearance.
7. Loading of out riggers/stabilizers should be well within safe ground bearing capacity
8. No person should be on equipment or vehicle during loading and unloading of material
9. Operators should be protected by warning barriers or switching off power when working in close proximity of overhead power lines
10. The equipment /vehicles should be well maintained and provided with effective brake system and other safety devices (wherever require)
11. Rotating parts of equipment should be adequately guarded
12. Provide necessary personal protective appliances and ensure its use by the operating personnel
Ensure effective measures at source to control harmful emissions, dust, fumes contaminating atmosphere and cause health hazards to the operators and people in the vicinity.
13. No overloading/over stressing of vehicles/plant is allowed
14. Hoses, pipes, receivers, gauges and valves involved in carrying out hydraulic fluid/ compressed air should be checked for leaks and tested prior to operation.
15. Adequate safe clearance for swing and movement is to be judged during operation of Concrete mixer



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 54 of 162

16. Setting of machine on firm and level ground with wheel locked to prevent movement of machine
17. Proper instructions and Special precautions are to be ensured to prevent entry in to the danger zone of projectile of bucket while dropping bucket
18. Operator leaving work spot should ensure that the equipment/vehicle is kept in neutral position and place on firm and level ground.
19. The hand brake should be kept in position and block road wheels as additional safety measure
20. Blades/buckets should be kept low while moving
21. The dozer blades should not be used as brakes except in emergency
22. The ground should be examined for its bearing capacity and general safety especially when operating road roller at the edges of slopes, embankments.
23. The roller should not be moved downhill with the engine out of gear
24. If operating near excavations the following precautionary measures are to be ensured
25. Barricading, edge protection to prevent fall of persons/vehicles over running while reversing etc.
26. Suitable support system and adequate allowance to avoid the danger of side collapsing
27. Experienced signaler /attendant should be always accompanied with operator/driver for proper direction /signal and also to caution others in the working Zone during operation of mobile plant

13.2.2.5 Concrete Vibrators

1. Revolving parts/belt drives should be adequately guarded and Vibrating unit shall be completely enclosed and have suitable overload relays and effectively earthed
2. Ensure sufficient length of cable to the Vibrator.
3. Ensure electric starters and other accessories are firmly fixed adequately supported
4. Ensure locking of needle load while inserting needle in to the vibrator,
5. Ensure periodical lubrication and maintenance

13.2.2.6 Concrete Mixers

1. Setting of machine on firm and level ground with wheel locked to prevent movement of machine
2. Proper instructions and Special precautions are to be ensured to prevent entry in to the danger zone of projectile of bucket while dropping bucket

13.2.3 WELDING & GAS CUTTING SAFETY (HOT WORK)

1. All Hot Work shall require a Hot Work Permit
2. There shall be flash-back arrestors conforming to IS-11006 at both cylinder and burner ends. Damaged tube and regulators must be immediately replaced.
3. All safety precautions shall be taken for welding and cutting operations as per IS-818.
4. When possible, items to be welded, cut, heated, etc. shall be moved to a safe location free of combustible or flammable material. If this is not possible, then all combustibles/ flammables that can be removed from the area shall be removed within a 35-foot circumference and a positive means of confining arcs and sparks generated by the process shall be ensured and additional person(s) shall be stationed as fire-watch for the area(s) still exposed, along with obtaining the Hot Work Permit as applicable.
5. Appropriate fire-fighting equipment is to be available in close proximity of any welding and gas cutting operations at all times suitable for the type of Fire.
6. Drums, tanks, and similar containers that have contained flammable or toxic material shall not be welded, cut, or heated until they have been made safe by water filling, thorough cleansing or similar accepted practices. The container shall also be ventilated during the welding, cutting, or heating process.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 55 of 162

7. Proper ventilation is required for any welding or torch operations performed in a confined space.
8. Any welding or gas cutting operations performed on metals of toxic compounds or coating such as zinc, stainless steel, lead, cadmium, chromium, and beryllium shall be properly ventilated and/or proper respiratory protection shall be worn by any person that could be exposed to fumes, vapors, and gasses created by the welding and gas cutting processes.
9. Wherever it is practical, all arc welding operations shall be shielded to prevent direct light rays or sparks from contacting persons in the vicinity or from reaching areas normally used to travel through or into the vicinity. Where this is not practical, persons who shall be in the area are to use proper eye and skin protection. Other persons who are not participating in the welding or gas cutting operations are not to be allowed into the hazard zone.
10. Welders and other employees who are exposed to arc welding radiation shall wear suitable clothing and protective apparel to prevent burns and other types of ultraviolet radiation damage to the skin.
11. Arc welding machines shall be shut down when being moved or when they are not in continuous use. Electrode holders left unattended shall have electrodes removed and shall not be left where they might contact employees or conducting objects.
12. Arc welding power supply cable shall be of proper rating and material, e.g. copper.
13. Welders shall guard against allowing materials adjacent to or behind them to reflect radiation back toward them or towards others in the area. Reflected radiation can cause skin burns and eye flash burns.
14. Valve caps shall be in place when cylinders are not in use. Valve caps shall never be used for lifting the cylinder vertically.
15. Torches shall only be lit by approved strikers; never with matches, cigarette lighters, or hot-work.
16. **Splatter / Slag Collector**

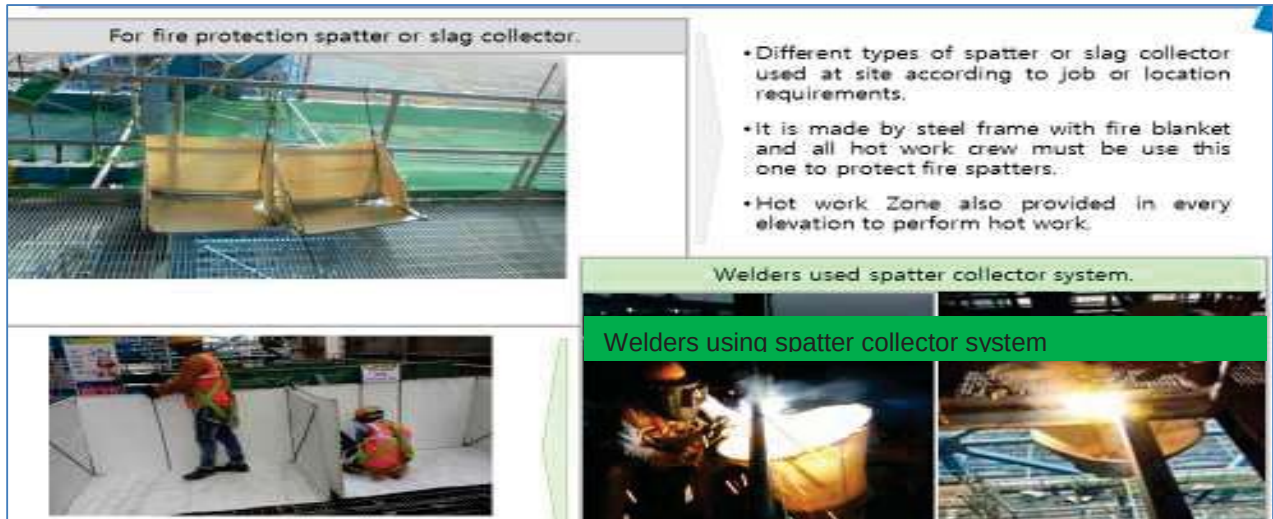


Fig. 13.2.3.1 Splatter / Slag Collector

While carrying out job at height, the sparks or molten slag shall be prevented from falling down by putting a fire-resistant (non-asbestos) sheet or patter/ slag collector or even MS Sheet. The passage of falling sparks or molten slag shall be barricaded till ground floor and any cable/ tubes/ any other objects interfering in the passages hall either be removed or covered with Fire-resistant sheet or MS Sheet.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 56 of 162

13.2.3.1 COMPRESSED GAS

1. All cylinder valves shall be closed when any work is finished and when any Cylinders are empty or being moved. Valve protection caps shall be placed and secured properly before gas cylinders are transported, moved or stored.
1. Compressed gas cylinders shall be secured in an upright position with chain or appropriate means during storage & use. However, a trolley shall be used for transportation.
2. Compressed gas cylinders shall always be secured from tipping or falling, whether in use, in storage or in transit. The cylinders shall always be secured upright, except during times when actually being hoisted or carried.
3. When cylinders are transported by powered vehicle they shall be secured in a vertical position.
4. Regulators shall be removed when cylinders are not in use or are in transit, unless the cylinder is firmly secured on a special carrier designed for this purpose.
5. Gas cylinders are not allowed to be used in man-basket when occupied.
6. Cylinders containing oxygen or fuel gasses shall not be taken into confined spaces.
7. Oxygen cylinders shall be stored a minimum of 6 meters from fuel gas cylinders or shall have an approved firewall between them.
2. All cylinders shall be kept at a safe distance from welding or cutting operations or shielded from arc/ sparks / slag.
3. All cylinders shall be placed where they cannot become part of the electrical circuit.
4. Oxygen and acetylene shall not be stored together. Oxygen must be separated from acetylene (or ANY fuel gas) or combustible material by at least 20ft or a barrier with a 30 minute fire resistance rating.
5. All Cylinders should be stored upright in a designated area with labels for the type of gas. All applicable precautions to be ensured during storage
6. Oxygen and fuel gas regulators, hoses and associated equipment shall not be altered and shall be in proper working order while in use.
7. Compressed air can be extremely dangerous if allowed to penetrate the skin. As such, the use of compressed air to clean off yourself or other workers shall be strictly prohibited.
8. All gas cylinders shall be stored in upright position. Suitable trolley shall be used for cylinder movement, the design of which shall be submitted to BHEL Engineer for approval.
9. No of cylinders shall not exceed the specified quantity as per OCP
10. Cylinders shall be moved by tilting and rolling them on their bottom edges. They shall not be intentionally dragged, struck or permitted to strike each other violently.
11. All cylinder should be kept only in cylinder trolley.
12. Cylinder shall be transported in upright vertical position by suitable mean.

13.2.4 LIFTING & RIGGING SAFETY

1. All Heavy / Complex Lifting operations as defined in Clause 6.12 shall require a Lifting Work Permit.
2. All the cranes and lifting tools & tackles shall be inspected on daily / weekly basis as well as



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 57 of 162

monthly by expert as per applicable formats.

3. In addition, inspection / certification as mandated by law shall be carried out wherein these shall be tested and certificates of fitness shall be obtained from 3rd party State Govt. approved competent agency before deploying at site and later periodically. BHEL shall be given advance intimation of any such inspections
4. The last date of Third Party Inspection and the next Due date shall be conspicuously displayed on all cranes. A copy of certificate shall be pasted on operator's cabin of all the lifting equipment.
5. Following requirements shall be mandatorily followed, wherever applicable:
 - a. The manufacturer's instruction for maintenance shall also be followed. All safety measures shall be followed.
 - b. All tools tackles, lifting appliances; material-handling equipment etc. used by the subcontractor shall be of safe design and construction.
 - c. The operators, slingers and signalers shall be qualified as per IS 13367 (part-1):2003 "Safe use of cranes- code of practices".
 - d. There shall be a person responsible for co-ordination among cranes where multiple cranes are used, and lifting over 75% of the crane capacity to be avoided.
 - e. Mobile phone should be banned for crane operator and lifting operation. Only walki talki shall be allowed in rigging/Lifting purpose.

13.2.4.1 Personnel Lifts (Man-Basket / Jhoola):

The design of personnel man basket shall be submitted to BHEL Engineer for approval before use. Relevant permit (Height work & others as applicable) shall be completed prior to lifting any people, along with a rigging plan.

- a. A separate Lifeline / Fall arrestor anchored to a fixed structure outside of Jhoola shall be provided for the workers inside the basket. All occupants of the basket shall have Safety Harnesses equipped with rope grabs, which are to be hooked to the vertical lifeline.
- b. Man-basket shall be used where access through ladders or scaffolding is not feasible.
- c. Man-baskets shall be designed and engineered by a manufacturer (job made man-baskets are not allowed, unless designed and tested by a certified engineer), and built robust with MS Angles and flats or plates or channels only.
- d. Guard rails top and mid, must be in place and screened-in to avoid material from falling out of basket. The factor of safety shall be 200%.
 - e. It shall have a door with double latches and shall open inside. Anchor points shall be identified within the man-basket.
- f. The man-basket shall be thoroughly inspected and load tested and a trial run performed without personnel before being put to job.
- g. It shall be treated as a lifting tool (T&P Item) and shall undergo same certification cycle and inspection as other lifting equipment.
- h. An additional sling of required lifting capacity shall be fixed the man-basket main lifting point and attached to the crane above the ball or block.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 58 of 162

- i. While lifting man-basket, the crane shall maintain a uniform speed of lift without any swing.
- j. Once man-basket reaches the destination, the lift brakes shall be locked as long as the basket remains at that point. The same care shall be taken in its descent.
- k. As for hanging man-basket, the same shall be hung off a rigid structure with help U-shaped handle welded to man-basket. This shall be tested once in a year by a competent person.
- l. Use of Rebar steel for making and monkey-ladder must be avoided.

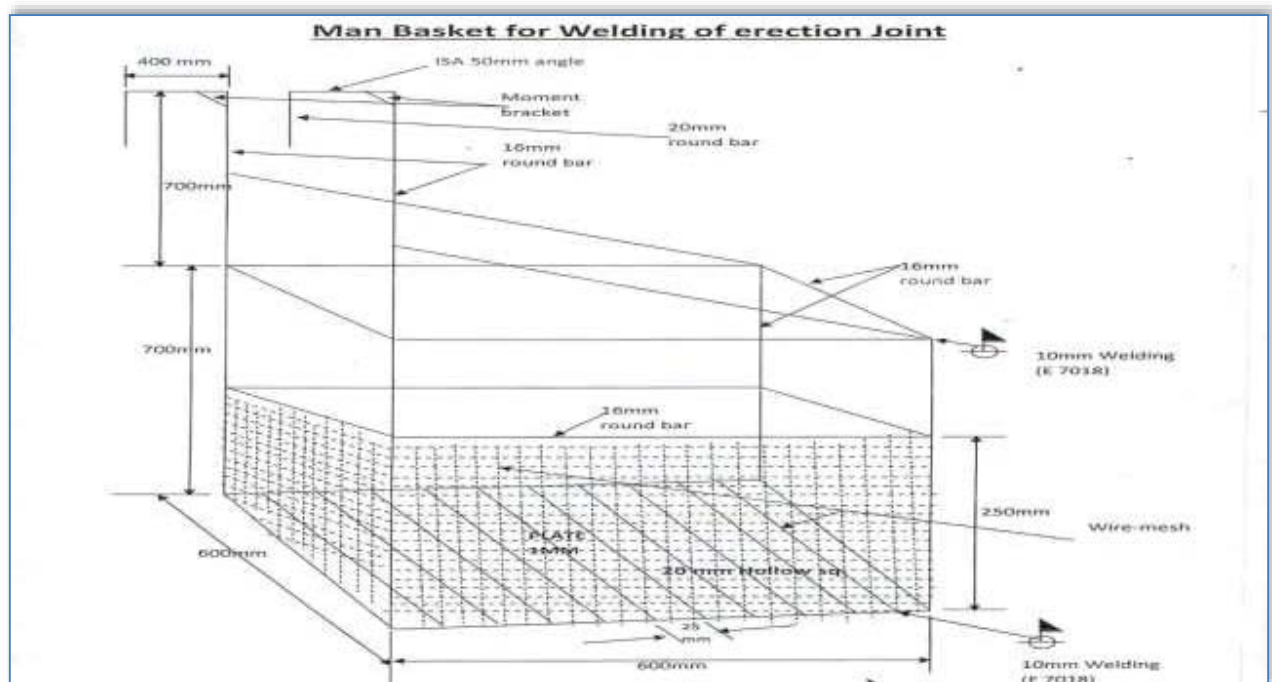


Fig. 13.2.4.1 Man Basket for Welding Erection Joint

13.2.4.2 Cranes & Hoisting Equipment:

This section provides the guidelines to ensure proper rigging and lifting activities are accomplished safely and in accordance with applicable specifications, codes, and regulations.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-

ER
Rev.: 00

Date:25.04.19

Page 59 of 162

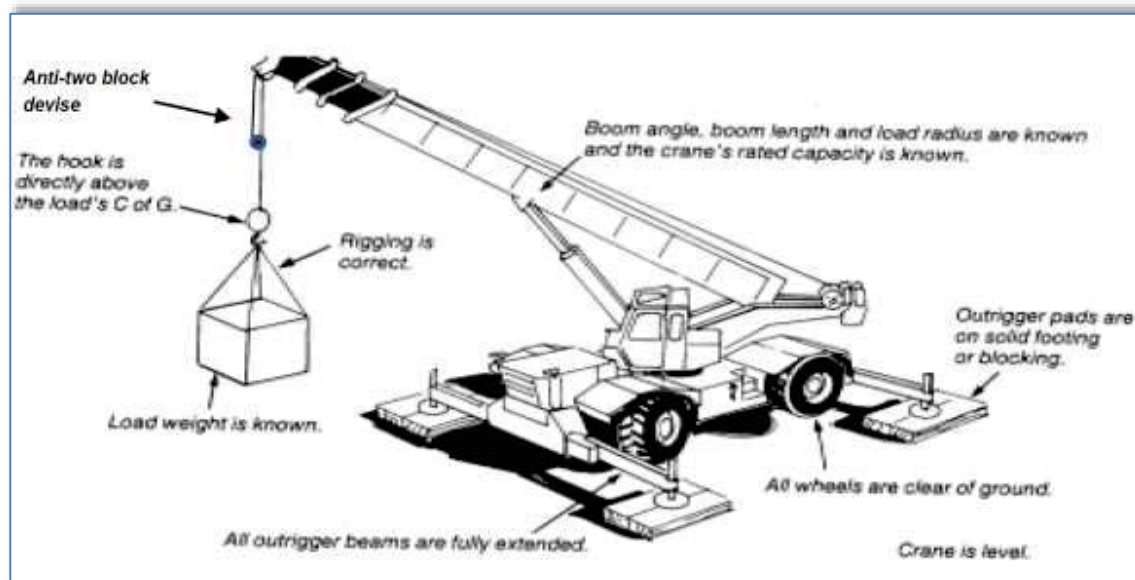


Fig. 13.2.4.2 Proper Crane Setup

- a. On every crane or piece of hoisting equipment notices of all rated load capacities, recommended operating speeds, and any hazard warnings or special instructions shall be conspicuously posted. All instructions and warning shall be visible from the equipment operator 's station.
- b. Cranes shall have an Anti-Two-block safety device installed
- c. All mobile cranes shall have overload and backup alarms, load angle indicators and limit switches
- d. All areas within swing radius of cranes that are potentially accessible by pedestrian, vehicular, or equipment movement shall be barricaded to prevent anyone or any vehicle or equipment from being struck by the crane or hoisting equipment, or its load(s).
- e. No part of the lifting equipment or its load shall be within the distance as specified in the Indian Electricity Act from an energized power line
- f. Cranes shall have annual certified third party inspection and be inspected before use by the operator. Any defects shall be corrected before use. Logs of crane inspection shall be kept with the crane.
- g. Make certain that the rigging personnel, material, and equipment have the necessary capabilities for the job and are in safe condition.
- h. Communicate with person(s) directly responsible for accomplishing the work and / or work area to establish requirements/responsibilities and make certain that all preparatory work is complete.
- i. Mats/Pads must be used on all lifting equipment, equipped with out riggers.
- j. Pick and carry must have the load secured to the rig in front.
- k. Only BHEL Approved Plate Lifting Spreader Beam configuration shall be used (Sample in Fig. 13.2.4.2)



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-

ER
Rev.: 00

Date:25.04.19

Page 60 of 162

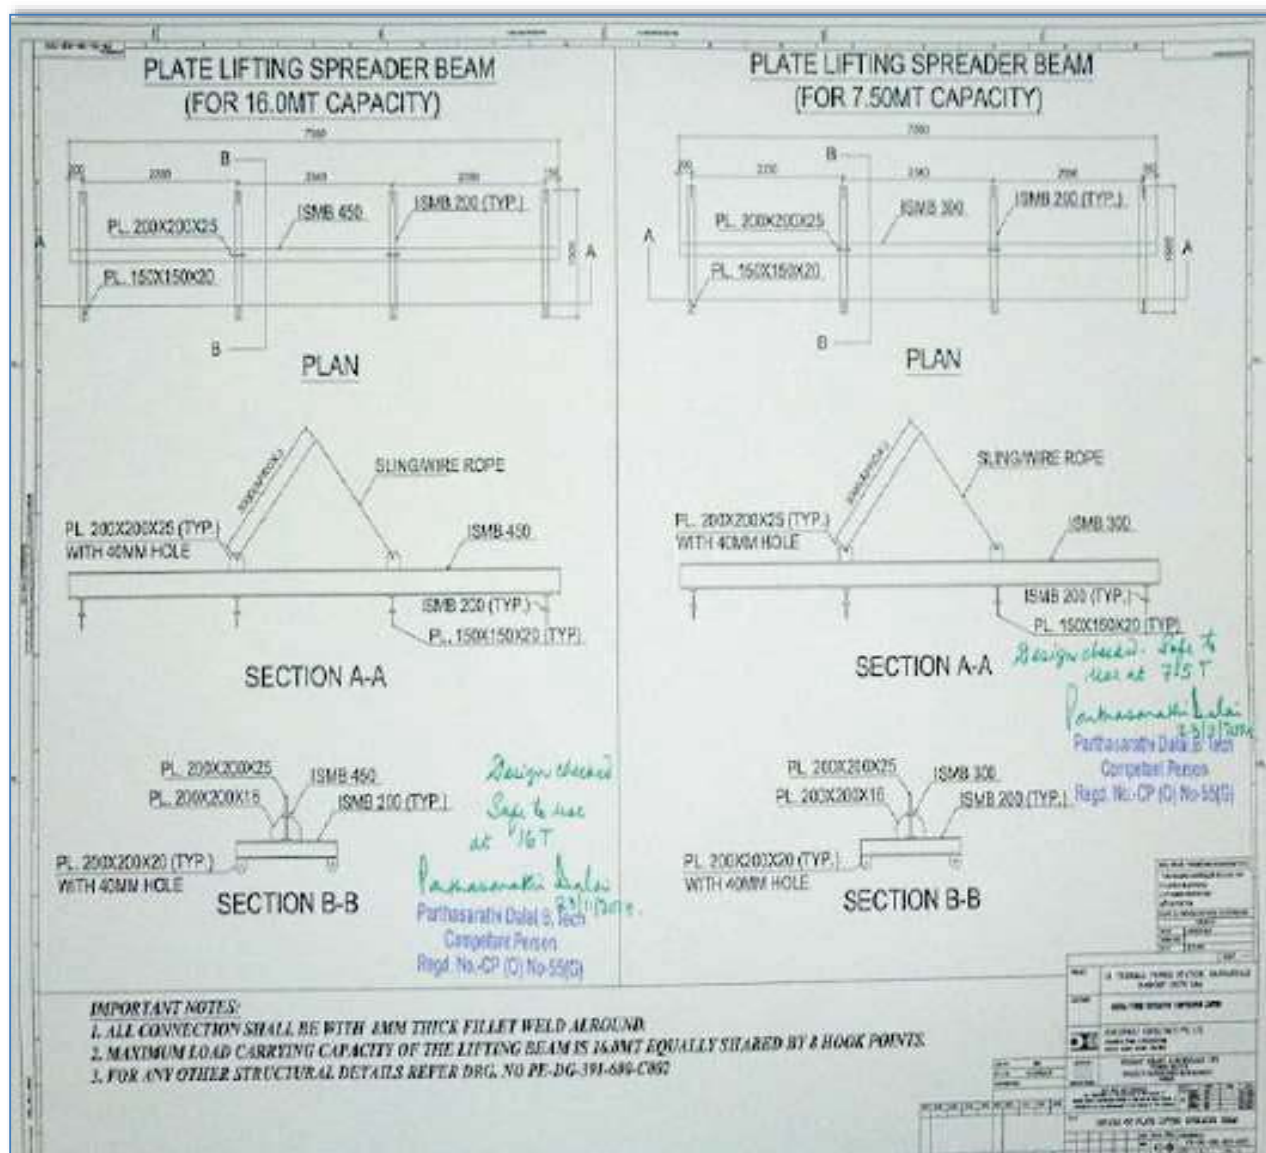


Fig. 13.2.4.3 Typical Plate Lifting Spreader Beam Configuration for 7.5 MT and 15 MT Loads

I. Crane operators must follow the following:

1. Pass an annual Operator's Physical examination
2. Carry a valid training certification card at all time while operating issued by the Govt. or other recognized institute.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date: 25.04.19

Page 61 of 162

13.2.4.3 SAFE RIGGING PRACTICES

13.2.4.4

- a. Review the planned operation and requirements with the operator and rigging crew.
- b. Ensure a pre-lift meeting is conducted with crane operator, tagline operator, signal personnel, and Safety Manager.
- c. Designate a qualified person from the rigging crew to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means.
- d. Clear the lift area of all unnecessary personnel.
- e. Hydras shall only be allowed for loading & unloading works & shall not be allowed to move with load

13.2.4.4.1 RULES FOR SAFE RIGGING

1. Use loops, thimbles and corner pads to prevent damage to slings when used around corners or on cutting edges.
2. Never allow wire rope to lie on the ground for any length of time or on rusty steel or near solvents, chemicals or corrosive substances.
3. Slings must not be pulled from between or under loads with load resting on the sling.
4. Keep all rope away from flame cutting or welding operations.
5. Never use rope as sling material.
6. Never wrap a wire rope completely around a hook.
7. Do not bend wire rope near any attached fitting.
8. The sling must be selected to suit the most heavily loaded leg rather than the total weight when using multi-legged sling to lift loads in which one end is heavier than the other.
9. When using 3 and 4 legged sling configurations, any two legs must be capable of supporting the entire load.
10. Where possible, wire rope choker hitches must include a shackle with the eye around the shackle pin to prevent breaking wires of the choke. The choker hitch must be "snugged down" prior to lifting, not after tension is applied.
11. Unless authorized by the hook manufacturer when more than two rope eyes are placed over a hook, install a shackle, pin resting in the hook, and place the rope eyes in the bowl of the shackle.
12. Properly rig all loads to prevent dislodgment of any part.
13. Use guide ropes or tag lines to prevent the rotation or uncontrolled motion of the load when necessary.
14. Loads must be safely landed and properly blocked before being unhooked and unslung. Tag lines must not be used in situations that jeopardize the safety of the lift.
15. Lifting beams must be plainly marked with their weight and designed working load and must only be used in the manner for which they were designed.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 62 of 162

16. The hoist rope or chain must never be wrapped around the load. The load must be attached to the hook by slings or other rigging devices that are adequate for the load being lifted.
17. Multiple part lines must not be twisted around each other.
18. The hook must be brought over the center of gravity of load before the lift is started.
19. If there has been a slack rope condition, determine that the rope is properly seated on the drum and in the sheaves prior to lifting.
20. Keep hands away from pinch points as the slack is being taken up.
21. Leather gloves are recommended when handling wire rope.
22. Avoid impact loading caused by sudden jerking when lifting or lowering. Lift the load gradually until the slack is eliminated.
23. Never ride on a load that is suspended.
24. Avoid allowing the load to be carried over the heads of any personnel.
25. Never work under a suspended load until the load has been adequately supported from the floor and all conditions have been approved by the supervisor in charge of the operation.
26. Never leave a load suspended unless emergency evacuation is required.
27. Never make temporary repairs to sling.
28. The capacity of a sling is determined by its angle, construction, type of hitch and size.
29. Never lift loads with one leg of a multi-leg sling until the unused legs are made secure.
30. Never point load a hook unless it is especially designed and rated for such use.
31. Make certain that the load is broken free before lifting and that all legs are taking the load.
32. When using two or more slings on a load make certain all slings are made from the same materials.
33. Lower the loads on to adequate blocking to prevent damage to the slings.
34. Materials and equipment being hoisted must be loaded and secured to prevent any movement which could create a hazard in transit.
35. The weight of the hook, load block and any material handling devices must be included when determining crane capacity.
36. Calculated weights cannot exceed 75% of the chart without written approval.
37. Personnel must be completely clear of loads being picked up or set down by crane. Tag lines will be used to control the loads. Loads must not be touched by hand while placing/ moving.

13.2.4.4.2 SLINGS

a. Synthetic Slings

The following are rules for safe use of synthetic slings:

- i. Synthetic slings must be marked to show the rated capacity for each type of hitch and type of web material.
- ii. Nylon web slings must not be used where fumes, vapors, sprays or mists or liquids of acids or phenolic are present. Web slings with aluminum fittings must apply in this category.
- iii. **Synthetic web slings must be removed from service and destroyed if any of the following conditions are present:**



**POWER
SECTOR**

**HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)**

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 63 of 162

- a. Acid or caustic burns
- b. Melting or charring of any part of the sling surface
- c. Snags, punctures, tears or cuts
- d. Broken stitches
- e. Distortion of fittings
- f. Synthetic web slings of polyester or nylon must not be used at or come in contact with temperatures in excess of 82°C
- g. Polypropylene web slings must not be used at or come in contact with temperatures in excess of 93°C
- h. Insulated hooks must be tested yearly to insure insulation integrity to at least manufacturer's specifications.

iv. Wire Rope Slings must be removed from service and destroyed if any of the following conditions are present:

- a. In (10) randomly distributed wires broken in one (1) rope lay, or five (5) broken wires in one (1) strand in one (1) rope lay.
- b. Wear or scraping of one-third the original diameter of outside wires.
- c. Kinking, crushing, bird caging or any other damage resulting in distortion of the wire rope structure such as:
- d. Evidence of heat damage.
- e. End attachments that are cracked, deformed worn.
- f. Corrosion of the rope or end attachments.

v. Metal mesh slings must be immediately removed from service if any of the following conditions are present:

- a. A broken weld or broken brazed joint along the sling edge.
- b. Reduction in wire diameter of 25 percent due to abrasion or 15 percent due to corrosion.
- c. Lack of flexibility due to distortion or corrosion.

vi. Synthetic web slings must be removed from service and destroyed if any of the following conditions are present:

- a. Acid or caustic burns
- b. Melting or charring of any part of the sling service
- c. Snags, punctures, tears or cuts
- d. Broken stitches
- e. Distortion of fittings

vii. Requirements of Plate Clamps:

- 1. The rated load of the plate clamp must be marked on the main structure.
- 2. Care must be taken to make certain the load is correctly distributed for the plate clamp being used.
- 3. Do not allow load or plate clamp to come into contact with any obstruction.
- 4. The plate clamp must not be used for side pulls or sliding the load.
- 5. When lifting stainless steel or special alloys, ensure plate clamp is designed for use on



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-

ER
Rev.: 00

Date:25.04.19

Page 64 of 162

the specific metal.

13.2.4.4.3 SIGNALING PRACTICES:

- The "slinger" is responsible for attaching and detaching the load to and from the crane. He shall:
 - have received appropriate training on general safe lifting operations;
 - be capable of selecting lifting gears suitable for the loads;
 - liaise with the operator and direct the movement of the crane safely.
- The "signaller" is responsible for relaying the signal from the slinger to the crane operator. He shall:
 - have received appropriate training on general safe lifting operations;
 - be able to direct the movement of the crane and loads.

Suggested hand signals



Note: During the lifting operation, either the slinger or signaller shall communicate with the operator. Other communication methods (e.g., wireless walkie-talkies, telephones, etc.) may also be used.

Fig. 13.2.4.4 Recommended Signalling Practices



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 65 of 162

13.2.5 DEMOLITION WORK

Before any demolition work is commenced and also during the process of the work the following shall be ensured, besides using the Work Permit:

1. All roads and open areas adjacent to the work site shall either be closed, suitably protected or restricted for movement
2. No electric cable or apparatus which is liable to be a source of danger nor a cable or an apparatus used by the operator shall remain electrically charged.
3. All practical steps shall be taken to prevent danger to persons employed from the risks of fire or explosion or flooding. No floor, roof or other part of the building shall be so overloaded with debris or materials as to render them unsafe.

13.2.6 T&Ps General

1. All T&Ps/ MMEs should be of reputed brand/appropriate quality & must have valid test /calibration certificates bearing endorsement from competent authority of BHEL.
2. Subcontractor to also submit monthly reports of T&Ps deployed and validity test certificates to BHEL safety Officer as per the format/procedure of BHEL.
3. Tagging and punching in all lifting tool is compulsory with SWL, sr. no. and due date.
4. All T&Ps shall be inspected by authorized Third Party agency as per applicable frequency. BHEL shall be kept informed of any such scheduled inspection
5. All T&Ps shall be internally inspected in each quarter and colour coded as below.

13.2.6.1 T&P Color Coding Procedure:

Inspections and tests shall be documented by means of color coding which shall verify that inspections or testing are current and that all receptacles, portable Power tools, Lifting Tools & Tackles have been inspected and tested as required. The color codes used on the project shall be:

GREEN	BLUE	YELLOW	RED
January February March	April May June	July August September	October November December

Table. 13.2.6.1 T&P Color Coding Procedure

- i. The cycle of colors shall be Quarterly as a minimum or as decided by BHEL. The color code tape / Sticker shall be clearly visible to designate the period for which the inspections and tests were conducted.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 66 of 162

- ii. Following the initial inspection, the equipment must be color-coded quarterly as per color-coding instructions that will be issued by the subcontractor.
- iii. Fire extinguisher with the current month color-coding inspection sticker must be provided and secured in the platform.
- iv. All slings shall be regularly inspected in accordance with the requirement of the project for frequent and periodic inspections and discard immediately if they fail to meet the minimum requirements of the project.
- v. The Subcontractor's Safety Officer shall ensure that all PPE is inspected prior to its issue. He is to ensure all subcontractor personnel are using safe and proper PPE equipment. Regular inspections on the PPE shall be carried out and personnel not adhering to those inspections shall be removed immediately from the site.
- vi. A five (10) day interval period shall be given into each monthly color code change. During this five (10) day period either color shall be acceptable.

13.2.7 CHEMICAL HANDLING

1. Displaying safe handling procedures & MSDS for all chemicals such as lube oil, acid, alkali, sealing compounds etc, at work place.
2. Where it is necessary to provide and/or store petroleum products or petroleum mixture & explosives, the subcontractor shall be responsible for carrying out such provision / storage in accordance with the rules & regulations laid down in the relevant petroleum act, explosive act and petroleum and carbide of calcium manual, published by the chief inspector of explosives of India. All such storage shall have prior approval if necessary from the chief inspector of explosives or any other statutory authority. The subcontractor shall be responsible for obtaining the same.
3. The used containers of chemicals shall be segregated and disposed off suitably
4. In case the used containers need to be re-used, all traces of the chemical to be removed by thorough cleaning with detergents etc. under trained supervision

13.2.8 ELECTRICAL SAFETY

1. Only electricians licensed by appropriate statutory authority shall be employed by the subcontractor to carry out all types of electrical works. The subcontractor shall maintain adequate number of qualified electricians to maintain his temporary electrical installations.
2. Power supply to all equipment at site to be routed through MCBs of appropriate rating. A 'Power Supply Distribution Plan' shall be prepared and submitted to BHEL Engineer for approval



**POWER
SECTOR**

**HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)**

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 67 of 162

3. All power supplies through cables shall be underground or overhead with height > 3mtrs.
4. All distribution boxes shall be locked and the key controlled by site management of concerned subcontractor.
5. All individual equipment & tools at site shall be powered through Earth Leakage Circuit Breakers of 30 mA sensitivity.
6. These MCBs and ELCBs shall be regularly tested as per Clause 14
7. All fuses and fuse wires shall be of standard size and rating.
8. All electrical appliances used in the work shall be in good working condition and shall be properly double earthed other than armour earthing.
9. All extension boards shall have separate switches for all sockets / connections
10. All portable electric tools used by the subcontractor shall have safe plugging system to source of power and be appropriately earthed.
11. Providing adequate no. of 24 V sources and ensure that no hand lamps are operating at voltage level above 24 Volts especially in confined spaces like inside water boxes, turbine casings, condensers etc.
12. Electrical appliance shall have proper earthing and for appliances equal to & more than 415V shall have two separate earthing (as per IS-3043-1987)
13. Details of earth resource and their test date to be given to BHEL safety officer as per the prescribed formats of BHEL
14. The subcontractor shall use only properly insulated and armoured cables and conform to the requirement of Indian Electricity Act and Rules for all wiring, electrical applications at site.
15. BHEL reserves the right to replace any unsafe electrical installations, wiring, cabling etc. at the risk & cost of the subcontractor.
16. No maintenance work shall be carried out on live equipment
17. Adequate precautions shall be taken to prevent danger for electrical equipment. No materials on any of the sites of work shall be so stacked or placed as to cause danger or inconvenience to any person or the public
18. The subcontractor shall carefully follow the safety requirement of BHEL/ the purchaser with the regard to voltages used in critical areas.
19. Wiring and Branch Circuits Must be protected by a proper amperage over-current device such as a HRC fuse or circuit breaker. Such installations must be located so as to prevent physical damage to the wire conductors & panels.

20. Portable Electric Lights

- a. Portable electric lights used in wet or potentially wet locations must be either low voltage type (24 volts or less) or protected by a GFI (ground fault interrupter).
- b. They must be visually checked before each use and periodically while in use to assure their original integrity is maintained.
- c. Cords with cuts, breaks, deep abrasions, etc. shall be taken out of service immediately.
- d. Repairs to extension cords shall only be performed by qualified/ licensed electricians.
- e. Must not be allowed to lie in wet or potentially wet areas.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 68 of 162

21. Underground Cables:

- a. Every electric line or cable of unknown origin that is discovered or exposed during a digging, drilling, probing, or similar operation is to be considered as energized and life threatening.
 - b. The senior company employee on the site will ensure that all necessary safety precautions are taken in order to isolate the line from all workers and the public.
 - c. Such precautions may include halting the operation if appropriate.
 - d. The senior company employee on the site is to then contact the proper authorities to have the line identified and either confirmed to be abandoned and/or made safe for continuing the work.
 - e. Any and all underground lines that are discovered or become severed must be considered energized on both sides, and be treated accordingly.
22. In general, equipment or machinery being moved or transported must maintain minimum clearances of 25 ft. to all power lines.
23. TAG IN/ TAG OUT must be in force in Switch Room and all Distribution Boxes for live power line. The authorized person's name and contact no shall be displayed
24. Ensure "double insulated" three - core cables and three pin connectors are used and are properly ground "all insulated" types, all electrical tools and appliances must be manufactured for industrial use.
25. All connections shall be electrically and mechanically sound and properly insulated. Taped joints are not permitted. Connections to socket outlets must be made with proper plugs.
26. Splices in electrical cords are not permitted. Repairs must be made at the socket connection and retain the same mechanical and dielectric condition of the original connection.
27. Damaged or defective electric tools, equipment and extension cords, etc. must not be used and shall be tagged out of service, removed from the work area and taken back to stores.
28. Only licensed electricians are authorized to repair and work on electrical equipment. Tampering with electric tools or equipment by others could result in termination.
29. Temporary electric cabling should be elevated 2.2 meters above the floor/ground or covered for protection. It must be kept clear of walkways and other locations where it may be exposed to damage or create a tripping hazard.
30. Energized wiring in junction boxes, circuit breaker panels and similar places must be covered and locked at all times.
31. Areas with live high voltage wires or terminals must be barricaded against entry and warning signs posted Danger – High Voltage and Authorized Personnel Only.
32. Personnel should never work on energized equipment, de-energizing (lockout/tag out) the equipment is always the first requirement.
33. The lockout and tag out procedure will be used when testing or working on, or around, energized installation.
34. Working around energized equipment should never be done alone. A second electrician must always be available for assistance.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date: 25.04.19
Page 69 of 162

35. If lockout/tag out of the work is infeasible (must be demonstrated), work on energized electrical circuits must be approved by the Site In-charge. All safety precautions necessary must be taken, PPE use must be evaluated per the exposure and used, i.e. high/low voltage gloves, insulated shoes, overcoats/aprons, face shields, and other protective equipment like insulated tools, blankets, mats, etc. must be used.
36. The welding machines earth leads shall be properly fixed without loose contacts. The earth cable only has to be used. No steel members shall be used as earth leads.
37. Electrical crews must be qualified for the equipment and tools they work on, including being trained in Cardio-Pulmonary Resuscitation (CPR) methods and First Aid for rendering help in the event of electric shock.

38. Qualified Persons for Electrical Works

One who is trained and wiremen licensed to Govt of State and familiar with the construction, operation and safety hazards of the equipment upon which they are permitted to work.

- i. Qualified persons are intended to be only those who are well acquainted/experienced with and thoroughly conversant in the electric equipment and electrical hazards involved with work being performed.
- ii. Only qualified persons may be permitted to work on or near exposed energized parts. Such persons are required to have been trained in three specific areas:
- iii. Qualified persons must be capable of working safely on energized circuits;
- iv. Must be familiar with the proper use of special precautionary techniques and procedures based on equipment and exposure; and
- v. Must be familiar with required personal protective equipment, insulating and shielding materials, and insulated tools.
- vi. Qualified persons are expected to be able to evaluate unknown situations and adjust their activities in such a way that only safe work practices are used. Such behavior is the responsibility of the qualified person.
- vii. It is possible and likely for an individual to be 'qualified' with regard to certain equipment in the work place, and unqualified on other equipment they must know their limitation and stop work if not qualified on what equipment they were to work on.
- viii. An employee who is undergoing on-the-job training, who, in the course of such training, has demonstrated an ability to perform duties safely at his or her level of training, and who is under the direct supervision of a qualified person is considered to be a qualified person for the performance of those duties. The process must be documented as proof.

13.2.9 USE OF HAND TOOLS AND POWER-OPERATED TOOLS

13.2.9.1 General Provisions

- a. All hand and power tools and similar equipment, shall be maintained in safe condition.
- b. When power operated tools are designed to accommodate guards, they shall be equipped
- c. with such guards, when in use;
- d. Belts, gears, shafts, pulleys, sprockets, spindles, drums, fly wheels, chains and other reciprocating, rotating or moving parts of the equipment shall be similarly guarded;
- e. Personnel using hand and power tools and exposed to the hazard of falling, flying, abrasive, and splashing objects, or exposed to harmful dusts, fumes, mists, vapors, or gases shall be



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 70 of 162

provided with the particular personal protective equipment necessary to protect them from the hazards;

- f. All hand-held powered platen sanders, grinders, grinders with wheels of 5 cm or less, routers, planers, laminate trimmers, nibblers, shears, scroll saws and jigsaws with blade shanks of 0.5 cm wide or less shall be equipped with only a positive on-off control.
- g. All hand-held powered drills, tappers, fastener drivers, horizontal, vertical or angle grinders with wheels greater than 5 cm in diameter, disc sanders, belt sanders, reciprocating saws, saber saws and other operating powered tools shall be equipped with a momentary contact on control provided that turnoff can be accomplished by a single motion of the same finger or fingers that turn it on.

13.2.9.2 Hand Tools

- a. The subcontractor shall not issue or permit the use of unsafe hand tools;
- b. Wrenches including adjustable pipe end and socket wrenches shall not be used when saws are sprung to the point that slippage occurs;
- c. Impact tools such as drift pins, wedges and chisels shall be kept free of mushroomed heads;
- d. The wooden handles of tools shall be kept free of splinters or cracks and shall be kept tight on the tools.

13.2.9.3 Power Operated Tools

- a. Electric power operated tools shall be either of the approved double-insulated type or shall be grounded;
- b. The use of electric cords for hoisting or lowering loads shall not be permitted;
- c. Pneumatic power tools shall be secured to the hose or whip by some positive means to prevent the tool from becoming incidentally disconnected;
- d. Safety clips or retainers shall be securely installed or maintained on pneumatic impact (percussion) tools to prevent attachments from being incidentally expelled;
- e. All pneumatically riveting machine staplers and other similar equipment provided with automatic fastener feed, which operate at more than 7 kg/cm² pressure at the tool a safety device on the muzzle to prevent the tool from ejecting the fasteners unless the muzzle is in contact with the work surface;
- f. Compressed air shall not be used for cleaning purposes except when the pressure is reduced to less than 2 kg/cm² and that too with effective chip guarding. The 2 kg/cm² pressure requirement does not apply to concrete form, mill scale and similar cleaning purposes;
- g. The manufacturer's safe operating for hoses, pipes, valves, filters and other fittings shall not be exceeded;
- h. Only personnel who has been trained in the operation of the particular tool shall be allowed to operate power-actuated tools;
- i. The tool shall be tested each day before loading to see that the safety devices are in proper working condition. The method of testing shall be accordance with the manufacturer's



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 71 of 162

recommended procedure;

- j. Any tool found not in proper working order, or that which develops a defect during use, shall be immediately removed from service and not used until properly repaired;
- k. Tools shall not be loaded until just prior to the intended firing time. Neither loaded nor empty tools are to be pointed at any other person. Hands shall be kept clear of the open barrel end;
- l. Loaded tools shall not be left unattended;
- m. Fasteners shall not be driven into very hard or brittle materials including, but not limited to, cast iron, glazed tiles, surface hardened steel, glass block, live rock, face brick or hollow tiles;
- n. Driving into materials that can be easily penetrated shall be avoided unless backed by a
- o. substance that will prevent the pin or fastener from passing completely through and creating a flying missile hazard on the other side;
- p. No fastener shall be driven into a palled area caused by an unsatisfactory fastening;
- q. Only non-sparking tools shall be used in an explosive or flammable atmosphere;
- r. All tools shall be used with the correct shield, guard or attachment as recommended by the manufacturer.

13.2.9.4 Abrasive Wheels and Tools

- a. All grinding wheel must be ISO certified only.
- b. All grinding machines shall be supplied with sufficient power to maintain the spindle speed at safe levels under all conditions of normal operation;
- c. Grinding machines shall be equipped with suitable safety guards;
- d. The maximum angular exposure of the grinding wheel periphery and sides shall not be more than 900, except that when the work requires contact with the wheel below the horizontal plane of the spindle, the angular exposure shall not exceed 1200. In either case, the exposure shall begin not more than 8.650 above the horizontal plane of the spindle. Safety guards shall be strong enough to withstand the bursting of the wheel;
- e. Floor and bench-mounted grinders shall be work-rests, which shall be rigidly supported and readily adjustable. Such work-rests shall be kept at a distance not to exceed 5 mm from the surface of the wheel;
- f. Cup type wheels used for external grinding shall be protected by either revolving cup guard or a band type guard;
- g. When safety guards are required, they shall be mounted as to maintain proper alignment with the wheel and the guard and the guard and its fastening shall be adequate strength to retain the fragments of the wheel in case of incidental breakage. The maximum angular exposure of the grinding wheel periphery and sides shall not exceed 1800;
- h. Portable abrasive wheel used for internal grinding shall be provided with suitable safety flanges;
- i. When safety flanges are required, they shall be used only with wheels designed to fit the flanges. Only safety flanges, of a type and design and properly assembled so as to ensure that the pieces of the wheel will be retained in case of incidental breakage, shall be used;
- j. All abrasive wheels shall be closely inspected and ring tested before mounting to ensure that



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 72 of 162

they are free from cracks or defects;

- k. Grinding wheels shall fit freely on the spindle and shall not be forced on. The spindle nut shall be tightened only enough to hold the wheel in place;
- l. All employees using abrasive wheels shall be protected by suitable eye protection equipment.

13.2.9.5 Wood Working Tools

- a. All fixed power driven woodworking tools shall be provided with a disconnect switch that can either be locked or tagged in the off-position;
- b. The operating speed shall be attached or otherwise permanently marked on all circular saws over 0.5 m in diameter or operating at over 3000 peripheral rpm. Any saw so marked shall not be operated at a speed other than that marked on the blade. When a marked saw is re-tensioned for a different speed, the marking shall be corrected to show the new speed;
- c. Automatic feeding devices shall be installed on machines wherever the nature of the work will permit. Feeder attachments shall have the feed rolls or other moving parts covered or guarded so as to protect the operator from hazardous points;
- d. All portable power driven circular saws shall be equipped with guards above and below the base plate or shoe. The upper guard shall cover the saw to the depth of the teeth, except for the minimum arc required to permit the base to be tilted for bevel cuts. The lower guard shall cover the saw to the depth of the teeth, except for the minimum arc required to allow proper retraction and contact with the work. When the tool is withdrawn from the work, the lower guard shall automatically and instantly return to the covering position.

13.2.10 START UP, COMMISSIONING AND TESTING:

There are various activities involved prior to commissioning- the major ones are -Hydraulic Test, Steam Blowing, Transformers Charging, Boiler Light Up, Rolling and Synchronisation and Full loading of unit.

- a. These activities shall be personally supervised by the site executive along with the commissioning engineer.
- b. Appropriate Work Permits shall be taken as applicable
- c. The readiness of upstream and downstream system shall be ensured before taking up.
- d. These shall be handled strictly by the authorized persons only and the team shall be suitably briefed about the activity including hazards & risks involved and control plan by the concerned executive-in-charge before start.
- e. Entry of persons to the area of activity shall be suitably restricted and the emergency functions like Ambulance, first aid center and Fire station shall be intimated about the plan well in advance.
- f. Tag-in/ Tag-out shall be in place while charging transformer and whenever necessary.
- g. Electricians with valid wiremen license only shall be permitted to work on power lines.
- h. The area and the passage shall be adequately illuminated.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date: 25.04.19
Page 73 of 162

13.2.11 FIRE SAFETY

Numbers and types of Fire Extinguishers shall be ensured as follows:

Sl. No	Type of Fire Risk (Class of Fire)	Extinguishing Medium & Relevant Indian Standard	Scale of Equipment (Minimum recommended)
1.	CLASS 'A' Fires involving ordinary combustible materials like wood, paper, textiles, rubber etc. (Ordinary hazard or low fire load)	WATER Soda acid type, water type (gas pressure) and water type (constant air pressure) IS: 934 -1976; IS: 940 -1976; IS: 6234 -1971	For every 600 square meter floor area or part, one 9-litre capacity. Minimum 4 numbers per floor or room; should not be required to travel more than 15 meter to reach any extinguisher.
2.	CLASS 'A' (Extra hazard & high fire load)	-do	-do – (Also, consult local fire authority).
3.	CLASS 'A' (Special hazards)	-do	-do – Extra provision For every 100 square meter floor area or part, one 4.5 Kg. CO ₂ ; minimum 2 numbers per room; should not be required to travel more than 10 meter to reach any extinguisher.
4.	CLASS 'B' (Fires in flammable liquids like oils, solvents, petroleum, products, varnishes, paints, etc. where blanketing effect is essential) (Storage and handling in small quantities)	FOAM / CARBON DIOXIDE / DRY CHEMICAL POWDER IS: 933 -1976; IS: 2878 1976; IS: 2171 1976; IS: 4308 -1982	For every 50 square meter floor area or part, 2 numbers 9 -liters foam or 5 kg dry powder; should not be required to travel more than 10 m in the area of storage to reach any extinguisher.
5.	CLASS 'B' (Bulk storage other than in tank form)	-do -	-do- (but minimum 3 numbers per room)
6.	CLASS 'C' (Fires involving gaseous substances under pressure where it is necessary to dilute the burning gas at a very fast rate with an inert gas or powder) (locations of storage and handling of gas cylinders)	CARBON DIOXIDE / DRY CHEM. POWDER. The best way to extinguish such fire is by stopping the flow of fuel gas to the fire. Container is kept cool with water spray. IS: 2878 1976; IS: 2171 -1976; IS: 4308 -1982	For every 100 square meter floor area or part; 2 numbers, 10 kg powder extinguisher or 6 kg CO ₂ ; minimum 3 nos. per room; should not be required to travel more than 10 meter to reach any extinguisher.
7.	CLASS 'D' Fires involving metals like magnesium, aluminum, zinc, potassium etc. where the burning metal is reactive to water and which require special extinguishing media or technique	SPECIAL DAY POWDER IS: 2171 -1976 IS: 4861 -1968	For every 50 square meter floor area or part, 2 nos. 5 kg special dry powder; minimum 3 nos. per room; should not be required to travel more than 10 meter to reach any extinguisher.
8.	MIXED OCCUPANCY (electrical); Generators; Transformers; etc.	CARBON DIOXIDE DRY POWDER, IS: 2878 -1976; IS: 2171 -1976	For every 100 square meter floor area or part one 10 kg CO ₂ . Minimum 2 numbers for every location should not be required to travel more than 10 meter to reach an extinguisher.

Note: Due to peculiarities of the power plant construction sites, there would be locations in the construction areas of Boiler, Turbine, Generator, Transformer, etc. where different types of fire risk (classes of fire) may co-exist. Special



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 74 of 162

care shall be taken while selecting and installing portable fire extinguishers for such locations so that all types of fire risk that may co-exist, are adequately covered. Similar special care shall be taken for storage areas.

1. All Electrical welding booths shall be equipped with appropriate Fire Extinguisher
2. Appropriate Fire Extinguishers shall be made within easy reach of all welding operations
3. Fire extinguishers shall be regularly tested and last checked date to be indicated on each.
4. Providing appropriate firefighting equipment at designated work place and nominate a fire officer/warden adequately trained for his job.
5. Subcontractor shall provide enough fire protecting equipment of the types and numbers at his office, stores, temporary structure in labour colony etc. Such fire protection equipment shall be easy and kept open at all times.
6. The fire extinguishers shall be properly refilled and kept ready which should be certified at periodic intervals. The date of changing should be marked on the Cylinders.
7. All other fire safety measures as laid down in the "codes for fire safety at construction site" issued by safety coordinator of BHEL shall be followed.
8. Non-compliance of the above requirement under fire protection shall in no way relieve the subcontractor of any of his responsibility and liabilities to fire incident occurring either to his materials or equipment or those of others.
9. Emergency contacts nos. must be displayed at prominent locations
10. Tarpaulin being inflammable should not be used (instead, only non-infusible covering materials shall be used) as protective cover while preheating, welding, stress relieving etc. at site.

13.2.12 HSE PREPAREDNESS FOR ADVERSE CLIMATES AND WEATHER

Subcontractor to remain updated on possible adverse weather conditions through reliable sources and all precautions taken accordingly.

13.2.12.1 SUMMER

1. The Working Time and Lunch Hour will be as per instruction of Statutory Authorities (no work between 11am to 3:30pm). However, in case temp comes down due to rain/cloudy weather work will continue as per normal routine.
2. During long lunch break, worker will be allowed to go back home for rest. Those who will like to stay back will avail at the facility of rest shed or other designed area.
3. They will be allowed to take small break during work as per their need.
4. Water sprinkling will be done on roads to reduce dust concentration.
5. Workers will be provided with adequate cool drinking water and Butter milk/Lemon water etc.
6. Adequate ORS stock will be made available at the work location in the First-Aid Box for use as needed and at First-aid Center for emergency need.
7. Fire prevention shall be on high alert, with removal of dry grass and bushes, etc, inside and outside the surrounding work areas. No smoking, and control of open flame/sparks shall be maintained and monitored.
8. Worker will be informed about the Do's and Don'ts to be followed during summer in the Pre Job Brief.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 75 of 162

Do's & Don'ts

9. Drink plenty of cool water and other non-alcoholic fluid and keep body well hydrated.
10. Eat salt in food to replenish loss of salt through sweating.
11. Avoid over physical exercise.
12. Have adequate sleep at night.
13. Eat light and less spicy food
14. Avoid eating food which was cooked long time ago.
15. Nobody should use small water bodies such as pits, running rain water through crevices etc. for drinking and cleaning purpose as it may be unhygienic.

Emergency Handling

In case of emergency due to heat disorder:

16. Rescue the victim from workplace and place under shed.
17. If to be rescued from height, use stoke basket or rescue kit.
18. Inform Ambulance immediately.
19. If nearby any air conditioned room/shed is available, place him inside the room/shed.
20. Administer First aid by trained First aider for Heat Disorder
21. If conscious, give him ORS solution to drink.
22. If required send the victim hospital immediately.

13.2.12.2 Monsoon

A. Height Work & Structural Safety:

1. Ensure that all height work platforms are barricaded and avoid any highly hazardous
2. height work.
3. Ensure that all personnel have good quality and intact safety shoes
4. Stop all dangerous height work during rain
5. Explain Do's and Don'ts to workers during Tool Box Meetings
6. Ensure that there are no weak structures, boards etc. that can fall during high winds
7. Do not allow any loose material (e.g. GI sheet, Ply board, empty cement bag, aluminum foil, foam sheets etc.) on roof sheds or top of structures.
8. Do not permit any one to ride up or come down scaffolds frame work during heavy wind or rain.
9. Provide "anchor" of adequate strength to scaffolds and other high-rise structures.
10. All rest sheds and GI sheds will be anchored into the round and wall and roof panels will be secured with J hook to prevent shed from blowing over or parts/pieces becoming airborne. Proper earthing per IS standard is also to be installed.
11. Do not go alone nor permit anyone to stay at tower-tops, roof-tops, high structures or on electrical poles during the course of stormy weather or heavy rain.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 76 of 162

B. Electrical:

1. All electrical connections / loads have to be routed through ELCB / RCCB (residual current circuit breaker) whose rating should be 30mA.
2. RCCB operational checks need to be done DAILY / WEEKLY during monsoon season.
3. Avoid joints on power cables which need to be laid over-head or under-ground, better not to have any joint at all. In case joints become essential, such cables must be housed rigidly and insulation must be provided as per approved standard. The joint shall be suitable for outdoor use.
4. All electrical distribution board shall be properly covered at top and sides to protect from rain water. Extension boards shall be protected from rain water.
5. Ensure proper "earthing" for each and every electrical appliance.
6. Double earthing need to be provided for 3-phase power supply and for voltage more than 220V.
7. Provide lightening arrestors at the top of Boiler 3 and boiler 4 and rest sheds which are not covered by existing lightening arrestor of other installation.

C. Others:

1. Maintain smooth flow on open drains. i.e. no obstruction or blockade shall be made on storm water drains. If required, make temporary drains.
2. Arrange back-filling of excavated pits on war-footing basis.
3. Arrange bringing down booms of all cranes, hydra machines during stormy weather (wind speed 40-50 kmph)
4. Confirm that all gantry cranes are effectively choked to prevent rolling and toppling.
5. Do not forget to deep ready a dew battery operated lights at site-offices during rainy season.
6. Avoid using wet damp clothes.
7. Barricade excavated zone filled with water.
8. Engage diesel operated water pump to dewater work area. For electrically operated water pump, the starter shall be protected from rain water. All rotating parts shall be guarded. Ensure availability of sufficient water pumps.

D. Health and hygiene:

1. Monsoon reduces the immunity of our body and makes us vulnerable to many diseases which are commonly associated with this season. It is time for us to keep our body challenging against disease by boosting our immunity and taking safety measures against these diseases.



**POWER
SECTOR**

**HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)**

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 77 of 162

2. The diseases associated with monsoon are Malaria, Jaundice, Gastro-intestinal infections, like typhoid, cholera etc. apart from these viral infections like cold and cough also make their presence felt. Majority of above said diseases are on account of:
3. Puddle of water formed due to rain become breeding grounds for mosquitoes which spread disease like, malaria and dengue fever. As a precautionary measure against mosquito-bite disease one can use mosquito net around the end which is better choice to mosquito repellants like mats and coils.
4. Pollution of drinking water during monsoon is very common. It is very necessary to drink clean and pure water when water-borne monsoon diseases like diarrhea and gastro-intestinal infections threaten us.
5. Walking in dirty water during rainy season leads of numerous fungal infection which affect toes and nails. Diabetic patients have to take a special care about their feet. Keeping feet always dry and clean is very necessary. Avoid walking in dirty water. Keep shoes socks and raincoats dry and clean.

E. Workmen will be made aware of following Do's and Don'ts:

1. Do not sleep in daytime.
2. Avoid over physical exertion.
3. During lightning and thunder storm, do not take shelter under tree. Take shelter inside rest shed or store room.
4. Wash vegetables with clean water and steam them well to kill germs.
5. Avoid eating un-cooked foods and salads should be washed properly before consumption.
6. Drink plenty of water and keep body well-hydrated.
7. Always keep the surrounding area dry and clean. Don't allow to get water accumulated around.
8. Keep body warm as viruses attack immediately when body temperature goes down.
9. Do not enter air conditioned room with wet hair and damp cloths.
10. Dry your feet and webs with soft dry cloth whenever they are wet.
11. Eat light and less spicy food.
12. Avoid eating food which was cooked long time ago.
13. Eat salt in food to replenish loss of salt through sweating.

13.2.12.3 Emergency Weather Conditions

A. Cyclone/Severe thunder storm

In the event of Cyclone/Severe thunder storm, alert will be issued by subcontractor on notification received by Govt. authorities/Metrological departments Customer or BHEL.

The actions required during cyclone/rough weather:

1. Check and advice subcontractors to cleanup work area. Pick up all loose and unused material of respective supervisor's area.
2. Tie to secure all gas cylinders to avoid displacement and unsafe conditions which could be due to wind pressure.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 78 of 162

3. Secure portable electricity generating sets and other equipment, pumps, hoses etc.
4. Make preparation for removal of water logging.
5. Take review of work activity and make preparation for removal of equipment and material from vulnerable areas.
6. Isolate/turn off all electrical power from the main panel/switches. Secure and anchor panels properly.
7. Recheck anchorage/tie of all temporary structures/sheds, tall objects, cranes, rigs, scaffolds etc. to avoid toppling due to wind force.
8. Cranes boom shall be secured, either locked or lowered the booms as reasonably and practicably possible and rigs to safe position for the safety point of view.
9. Group up all trash barrels, wooden pallets, forms; wooden decks etc. and anchor properly.
10. Welding machines, air compressors and such equipment are to be grouped together and secured to the stable objects. Welding leads, electrical cables, hoses are to be rolled up and secured properly.
11. Set on site vehicles on high ground in the site area with brakes set firmly.
12. Anchor all tanks, vessels, gas cylinders that may be moved by high wind and water.
13. Evacuate job site.

Personnel Evacuation:

14. Personnel Evacuation will be required if predicted wind speed and storm surge heights are beyond acceptable limits as per the instructions from Govt. Authorities/ Metrological departments or Customer.
15. Once the warning is received for personnel evacuation, an emergency response team shall be formed. The team will work with local authorities and other agencies formed/deployed to evacuate and transport all personnel involved in the project to the cyclone shelter.
16. Cyclone may be followed by the calm "EYE", be aware of it. If the wind suddenly drops, don't assume the cyclone is over. Violent wind may resume from the opposite side direction. Wait for the official "All clear Signal".
17. After the cyclone, do not go outside until officially communicated about safe situation outside. Use recommended routes for returning. Do not panic or rush while returning.
18. Checking of gas leaks and well being of electrical appliances is essential before leaving the site.
19. Follow local communications for official warning and advice. The construction Manager shall also obtain updates from customer/metrological departments and communicate to the personnel on project site.

13.2.12.4 Preparedness for Other Adverse Climates and Weather Conditions

All Preventive and Precautionary measures to ensure Health & Safety of workers in all possible adverse weather conditions based on the analysis of the local area conditions to be taken by the subcontractor

13.3 ENVIRONMENTAL CONTROL

1. Environment protection has always been given prime importance by BHEL. Environmental



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 79 of 162

- damage is a major concern of the principal subcontractor and every effort shall be made, to have effective control measures in place to avoid pollution of Air, Water and Land and associated life.
2. Subcontractor shall list out all applicable environmental aspects and impacts, and ensure control measures to manage the same.
 3. Chlorofluorocarbons such as carbon tetrachloride and trichloroethylene shall not be used.
 4. Waste disposal shall be done in accordance with the guidelines laid down in the project specification.
 5. Any chemical including solvents and paints, required for construction shall be stored in designated bonded areas around the site as per MSDS.
 6. In the event of any spillage, the principle is to recover as much material as possible before it enters drainage system and to take all possible action to prevent spilled materials from running off the site. Subcontractor shall use appropriate MSDS for clean-up technique. Subcontractor shall be responsible for the cleanliness of their own areas.
 7. Subcontractor shall ensure that noise levels generated by plant or machinery are as low as reasonably practicable. Where the subcontractor anticipates the generation of excessive noise levels from his operations the subcontractor shall inform BHEL accordingly so that reasonable & practicable precautions can be taken to protect other persons who may be affected.
 8. It is imperative on the part of the subcontractor to join and effectively contribute to environmental protection measures such as tree plantation and towards social causes and maintaining good relations with local populace.
 9. The subcontractor shall carry out periodic air and water quality check and illumination level checking in respective area of work place and take suitable control measure to maintain the same as per applicable laws / standards

13.3.1 WASTE MANAGEMENT

1. Subcontractor shall take suitable measures for waste management and fulfilling requirements of environment related laws/legislation as a part of normal construction activities.
2. Compliance with the legal requirements on storage/ disposal of paint drums (including the empty ones), Lubricant containers, Chemical Containers, and transportation and storage of hazardous chemicals will be strictly maintained.
3. Details of E-Waste, Hazardous Waste, shall be submitted to BHEL as per Format No. HSEP: 14-F18 and HSEP: 14-F19 respectively

13.3.1.1 BINS AT WORK PLACE

1. Sufficient rubbish bins shall be provided close to workplaces.
2. Bins should be painted yellow and numbered.
3. Sufficient nos. of drip trays shall be provided to collect oil and grease.
4. Sufficient qty. of broomsticks with handle shall be provided.
5. Adequate strength of employees should be deployed to ensure daily monitoring and service for waste management.

13.3.1.2 STORAGE AND COLLECTION

1. Different types of rubbish/waste should be collected and stored separately.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 80 of 162

2. Paper, oily rags, smoking material, flammable, metal pieces should be collected in separate bins with close fitting lids.
3. Rubbish should not be left or allowed to accumulate on construction and other work places.
4. Do not burn construction rubbish near working site.

13.3.1.3 SEGREGATION

1. Earmark the scrap area for different types of waste.
2. Store wastes away from building.
3. Oil spill absorbed by non-combustible absorbent should be kept in separate bin.
4. Clinical and first aid waste stored and incinerated separately.

13.3.1.4 DISPOSAL

1. Sufficient containers and scrap disposal area should be allocated.
2. All scrap bin and containers should be conveniently located.
3. Provide self-closing containers for flammable/spontaneously combustible material.
4. Keep drainage channels free from choking.
5. Make schedule for collection and disposal of waste.

13.3.1.5 WARNING AND SIGNS

1. Appropriate signage to be displayed at scrap storage area
2. No toxic, corrosive or flammable substance to be discarded into public sewage system.
3. Waste disposal shall be in accordance with best practice.
4. Comply with all the requirements of Pollution Control Board (PCB) for storage and disposal of hazardous waste.

13.4 HOUSEKEEPING

1. Keeping the work area clean/ free from debris, removing unused scaffoldings, scraps, insulation/ sheeting wastage /cut pieces temporary structures, packing woods etc. will be in the scope of the subcontractor.
2. Such cleaning has to be done by subcontractor within quoted rate, on daily basis by dedicated identified groups equipped with all require PPEs and training. The details of housekeeping group shall be provided to BHEL.
3. If such activity is not carried out by subcontractor / BHEL is not satisfied, then BHEL may get it done by other agency and actual cost along with BHEL overheads will be deducted from subcontractor's bill. Such decisions of BHEL shall be binding on the subcontractor.
4. Pests, such as beehives etc. shall be periodically removed in a humane fashion
5. **Following are to be taken care of on daily basis.**
 - i. All surplus earth and debris are removed/disposed of from the working areas to identified locations.
 - ii. Unused/Surplus cables, steel items and steel scrap lying scattered at different places /elevation within the working areas are removed to identify locations.
 - iii. All wooden scrap, empty wooden cable drums and other combustible packing materials, shall



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 81 of 162

be removed from workplace to identified locations. Sufficient waste bins shall be provided at different work places for easy collection of scrap/waste. Scrap chute shall be installed to remove scrap from high locations

- iv. Access and egress (stair case, gangways, ladders etc.) path should be free from all scrap and other hindrances.
- v. Workmen shall be educated through tool box talk about the importance of housekeeping and encourage not to litter.
- vi. Labor camp area shall be kept clear and materials like pipes, steel, sand, concrete, chips and bricks, etc. shall not be allowed in the camp to obstruct free movement of men and machineries.
- vii. Fabricated steel structures, pipes & piping materials shall be stacked properly.
- viii. No parking of trucks/trolleys, cranes and trailers etc. shall be allowed in the camp, which may obstruct the traffic movement as well as below LT/HT power line.
- ix. Utmost care shall be taken to ensure over all cleanliness and proper upkeep of the working areas

13.5 TRAFFIC MANAGEMENT

13.5.1 SAFE WORKPLACE TRANSPORT SYSTEM

- 1. Traffic routes in a work place shall be suitable for the persons or vehicles using them.
- 2. Traffic routes for pedestrians and vehicles shall be clearly demarcated and indicated
- 3. Traffic routes shall never intersect the area of work and shall not endanger the site personnel
- 4. For internal traffic, lines marked on roads / access routes and between buildings shall clearly indicate where vehicles are to pass.
- 5. Temporary obstacles shall be brought to the attention of drivers by warning signs / hazard cones.
- 6. Power cables shall be maintained at a minimum height above ground as specified in Indian Electricity Act & Rules.
- 7. Sensible speed limits shall set and clearly displayed. Painted Speed ramps preceded by a warning signs or marker are necessary for stretches of roads exceeding 50 meters.
- 8. The traffic route should be wide enough to allow vehicles to pass and re-pass oncoming or parked traffic and it may be advisable to introduce on-way system or parking restrictions.
- 9. Safest route shall be provided between places where vehicles have to call or deliver.
- 10. Avoid vulnerable areas/items such as fuel or chemicals tanks or pipes, open or unprotected edges and structures likely to collapse
- 11. Safe areas shall be provided for loading and unloading of material. Loading / Unloading Permit shall be taken from BHEL prior to any significant loading / unloading activity
- 12. Avoid sharp or blind bends. If this is not possible hazards should be indicated e.g. blind corner.
- 13. Ensure road crossings are minimum and clearly signed.
- 14. Entrance and gateways shall be wide enough to accommodate a second vehicle without causing obstruction.
- 15. Forklift trucks shall not pass over road hump unless of a type capable of doing so.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 82 of 162

16. Overhead electric cable, pipes containing flammable hazardous chemical shall be shielded by using goal posts height gauge posts or barriers.
17. The height of Power cables above areas of movement shall conform to Indian Electricity Rules
18. Road traffic signs shall be provided on prominent locations for prevention of accidents and hazards and for quick guidance and warning to employees and public.
19. Safety signs shall be displayed as per the project working requirement and guideline of the state in which project is done.
20. Vehicles hired or used shall not be parked within the 15m radius of any working area. Any vehicle, that is required to be at the immediate/near the vicinity, shall be approved by the person in-charge of the site.

13.5.2 TRAFFIC ROUTE FOR PEDESTRIANS

1. Where traffic routes are used by both pedestrians and vehicles road shall be wide enough to allow vehicles and pedestrians safely.
2. Separate routes shall be provided for pedestrians to keep them away from vehicles. Provide suitable barriers/guard at entrances/exit and the corners or buildings.
3. Where pedestrian and vehicle routes cross, appropriate crossing shall be provided.
4. Where crowd is likely to use roadway e.g. at the end of shift, stop vehicles from using them at such times.
5. Provide high visibility clothing for people permitted in delivery area.

13.5.3 WORK VEHICLES

Work vehicles shall be as safe stable efficient and roadworthy as private vehicles on public roads. Subcontractors shall ensure that drivers are suitably trained and have valid license and experience for the designated class of vehicle. All vehicle e.g. heavy motor vehicle forklift trucks dump trucks mobile cranes shall ensure that the work equipment conforms to the following:

1. A high level of stability.
2. A safe means of access/egress.
3. Suitable and effective service and parking brakes.
4. Windscreens with wipers and external mirrors giving optimum all round visibility.
5. Provision of horn, vehicle lights, reflectors, reversing lights, reversing alarms.
6. Provision of seat belts.
7. Guards on dangerous parts.
8. Driver protection - to prevent injury from overturning and from falling objects/materials.
9. Driver protection from adverse weather.
10. No vehicle shall be parked below HT/LT power lines in conformance to Indian Electricity Act & Rules.
11. Valid Pollution Under Control certification for all vehicles



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 83 of 162

13.5.4 DAILY CHECKS BY DRIVER

There should also be daily safety checks containing below mentioned points by the driver before the vehicle is used. Subcontractors should ensure that drivers carry out these checks as a minimum.

Brakes	Mirrors	Warning signals
Tires	Windscreen waters	Specific safety system i.e. control interlocks
Steering	Wipers	

13.5.5 TRANSPORTATION OF PERSONNEL AND MATERIALS BY VEHICLES

1. All drivers shall hold a valid driving License for the class of vehicle to be driven and be registered as an authorized BHEL driver with the Administration Department.
2. Securing of the load shall be by established and approved methods, i.e. chains with patented tightening equipment for steel/heavy loads. Sharp corners on loads shall be avoided when employing ropes for securing.
3. All overhangs shall be made clearly visible and restricted to acceptable limits
4. Load shall be checked before moving off and after traveling a suitable distance.
5. On no account is construction site to be blocked by parked vehicles Drivers of vehicles shall only stop or park in the areas designate by the stringing foreman.
6. Warning signs shall be displayed during transportation of material.
7. All vehicles used by Subcontractor shall be in worthy condition and in conformance to the Land Transport requirement

13.5.6 MAINTENANCE

All Vehicles used for transportation of man and material shall undergo scheduled inspections on frequent intervals to secure safe operation. Such inspections shall be conducted in particular for steering, brakes, lights, horn, doors etc. Site management shall ensure that work equipment is maintained in an efficient, working order and in good repair. Inspections and services carried out at regular intervals of time and or mileage. No maintenance shall be carried below HT/LT power lines.

13.6 EMERGENCY PREPAREDNESS AND RESPONSE

1. Subcontractor shall develop Emergency preparedness and response capability and Emergency Response Team as per [HSEP06: HSE Procedure for Emergency Preparedness and Response](#)
2. Availability of adequate number of first aiders and fire warden shall be ensured
3. All the subcontractor's supervisory personnel and sufficient number of workers shall be trained for fire protection systems. Enough number of such trained personnel must be available during the tenure of contract. Subcontractor should nominate his supervisor to coordinate and implement the safety measures and communicate the same to BHEL.
4. Assembly point shall be earmarked and access to the same from different location shall be shown
5. Fire exit shall be identified and pathway shall be clear for emergency escape.
6. Appropriate type and number of fire extinguisher shall be deployed as per Clause No. 13.2.11 and validity shall be ensured periodically through inspection
7. Adequate number of first aid boxes shall be strategically placed at different work places to cater



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 84 of 162

- to all emergency needs. Holder of the first aid box shall be identified on the box itself who will have the responsibility to maintain the same.
8. First aid center shall be developed at site with trained medical personnel and ambulance
 9. Emergency contact numbers of the site shall be displayed at prominent locations.
 10. Tie up with fire brigade shall be done in case customer is not having fire station.
 11. Tie up with hospital shall be ensured in order to ensure the availability of following services to victims quickly without wasting precious time:
 - a. Intensive Care Unit with Ventilator and other necessary life support systems
 - b. Facility of specialized Orthopedic Surgery – in case of fracture / amputation
 - c. Facility of specialized brain / neuro surgery – in case of head trauma
 - d. Facility of specialized burn unit / ward – in case of Fire / burn injury
 - e. and other facilities as per requirement at site location
- In case tie up with multiple hospitals is required to cover all possible accidents, same shall be done. The list of facilities to be regularly checked and updated.
12. A detailed emergency services (Fire / Medical etc.) tie up plan shall be submitted to BHEL in monthly report Format No. HSEP:14-F05
 13. Mock drill shall be conducted on different emergencies periodically to find out gaps in emergency preparedness and taking necessary corrective action

14 HSE INSPECTION

Inspection on HSE for different activities being carried out at site shall be done to ensure compliance to HSEMS requirements. The subcontractor shall maintain necessary safety equipment as applicable, to enable inspection personnel/agency perform Inspection. If any test equipment is found not complying with proper safety requirements then the Inspection Agency may withhold inspection, till such time the desired safety requirements are met.

The requirements of respective work permits are to be ensured by respective supervisors, safety personnel and area in-charges. In addition, the formats & checklists as per Clause 21 of this document provided by BHEL shall be used for inspection by Safety personnel (as a minimum), and records of inspection to be maintained. BHEL shall reserve the right to modify any Format in this document or introduce additional checklists / formats to ensure regular inspection of all equipment as per requirement.

14.1 DAILY HSE CHECKS

Both the Site Supervisors and HSE Supervisors are to conduct daily site Safety inspection around work activities and premises to ensure that work methods and the sites are maintained to an acceptable standard. The following are to form the common subjects of a daily safety inspection:



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 85 of 162

1. Height Work:

- Safe, barricaded platform
 - PPEs
 - Proper method
 - Awareness
- Personal Safety wears & gear compliance.
 - Complying with site safety rules and permit-to-work (PTW).
 - Positions and postures of workers.
 - Use of tools and equipment etc. by the workers.
 - The inspection shall be carried out just when work starts in beginning of the day, during peak activities period of the day and just before the day's work ends.

14.2 INSPECTION OF HEIGHT WORKING

- Any kind of height work (above 2 meters) shall not be carried out without active physical supervision by concerned supervisor or safety personnel. All non-conformances related to height work shall be handled on priority and closed immediately after halting the work.
- A roster of personnel deployed for inspection of height work and other critical activities shall be prepared and submitted to BHEL in monthly report Format No. HSEP:14-F05, in order to ensure effective supervision at all times
- Inspection on height working shall be conducted **daily** by supervisors before start of work to ensure safe working condition including provision of:

a. Fall arrestor	d. Fencing and barricading	g. Proper scaffolding with valid
b. Lifelines	e. Warning signage	Tags, access and egress.
c. Safety nets	f. Covering of opening	h. Illumination

- Inspection on height working shall be conducted once in a week by HSE officer as per
- Format no. HSEP: 14-F10.
- Medical fitness, including vertigo test of height worker shall be ensured.
- Height working shall not be allowed during adverse weather.

14.3 INSPECTION OF PPE

PPEs shall be inspected by HSE officer at random once in a week as per Format no. HSEP: 14-F06 for compliance to standard and provisions and any adverse observation shall be recorded in the PPE register.

14.4 INSPECTION OF T&Ps

- All T& Ps being used at site shall be inspected by HSE officer once in a month as per specific Formats in this document, or (if not available) general Format no. HSEP: 14-F07 for its healthiness and maintenance.
- A master list of T&Ps and validity of their inspection certificates shall be maintained by each agency and details shall be submitted to BHEL in monthly format no. HSEP:14-F05.
- The T&Ps which require third party inspection shall be checked for its validity during inspection.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 86 of 162

The third party test certificate should be accompanied with a copy of the concerned competent person's valid qualification record. BHEL shall be given advance intimation of Third Party Inspection. BHEL shall associate with Inspection as per discretion.

14.5 INSPECTION OF CRANES AND WINCHES

1. Cranes and winches shall be inspected by the operator through a daily checklist for its safe condition (as provided by the equipment manufacturer) before first use of the day.
2. Cranes and Winches shall be inspected by HSE officer once in a month as per Format no. HSEP: 14-F08 & F09 for healthiness, maintenance and validity of third party inspection.
3. The date of third party inspection and next due date shall be painted on cranes and winches.
4. The operators/drivers shall be authorized by sub-contractor based on their competency and experience and shall carry the I-card.
5. The operator should be above 18 years of age and should be in possession of driving license of HMV man & goods), vision test certificate and should have minimum qualification so that he can read the instructions and check list.

14.6 INSPECTION ON WELDING AND GAS CUTTING OPERATION

1. Supervisor shall ensure that no flammable items are available in near vicinity during welding and gas cutting activity.
2. Gas cylinders shall be kept upright.
3. Use of Flash back arrestor shall be ensured at both ends.
4. Inspection during welding and gas cutting operations shall be carried out by HSE officer once a month as per Format no. HSEP: 14-F11.
5. Use of fire blanket to be ensured to avoid falling of splatters during welding or gas cutting operation at height.
6. Availability of fire extinguisher in vicinity shall be ensured.

14.7 INSPECTION ON ELECTRICAL INSTALLATION / APPLIANCES

1. Ensure proper earthing in electrical installation
2. Use of ELCB at electrical booth
3. Electrical installation shall be properly covered at top where required
4. Use appropriate PPEs while working
5. Use portable electrical light < 24 V in confined space and potentially wet area.
6. Monthly inspection shall be carried out as per Format no. HSEP: 14-F12.

14.8 INSPECTION OF ELEVATOR

1. Elevators shall be inspected by concerned supervisors once in a week as per Format no. HSEP: 14-F13.
2. All elevators shall be inspected by competent person and validity shall be ensured.
3. The date of third party inspection and next due date shall be painted on elevator.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 87 of 162

14.9 MONTHLY SITE INSPECTION

Subcontractor shall carry out monthly HSE inspection of all work areas as per Format No. HSEP:14-F20 and submit to BHEL

14.10 NON-CONFORMITY HANDLING:

Any serious non-conformances identified during inspection observed shall be addressed immediately.

In case immediate closure of non-conformities is not possible:

- work to be halted in the area
 - Non-conformance to be generated and submitted to responsible person and BHEL
 - non-conformance to be resolved through responsible agency / person
- Only after closure of serious non-conformances, work to be allowed to resume.

All non-conformances & safety violations to be recorded and closed in a time bound manner.

15 HSE PERFORMANCE

HSE performance of subcontractor shall be monitored as per BHEL criteria, based on which, marks will be awarded. Marks can be used to evaluate and rate the contractor as per BHEL internal systems

HSE performance of the subcontractor shall be monitored as per the following parameters: (For each contract-wise package). **Periodicity:** RA Bill period

Sl. No.	Parameters of measurement	Ref Clauses	Weightage	Actual
1	Availability of safety officers at site – absence up to 15% permissible. Score proportionately gets reduced with higher rate of absence. Availability to be reckoned from start date of manpower mobilization	7.1	10	
2	Attendance by the safety officer and site CM (as applicable) in the meeting convened by BHEL	20	5	
3	Level of compliance w.r.t decisions taken in previous meetings/audit/inspection/as reported.	-do-	5	
4	Timely submission of monthly report on safety in the prescribed format	11	3	
5	Timely reporting any incident including near-miss to BHEL /Customer/statutory authority (if required) and submission of investigation report of all LTIs/	12	10	



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 88 of 162

	Major Property Loss incident and HSE events			
6	Degree of PPE compliance, Fall protection arrangements and safety net coverage	8.3, 14	15	
7	Level of compliance w.r.t safety rules	13,14	25	
8	Availability of proper first-aid facility , ambulance, hygienic labor colony and other adequate labor welfare initiatives, conducting of health check-up as per BOCW requirements	8	6	
9	Conducting induction training, skill training, tool box meeting, mock-drills, HSE Promotion, Emergency Preparedness and Response. Participation in BHEL training also counted	9.0	6	
10	Level of House-keeping, Environmental Control	13.3, 13.5	10	
11	Level of general illumination	8.4.11	5	
A	TOTAL Obtained		100	

Penalty score:

- i. For each fatality: -10
- ii. For each Major Incident: -07

NET TOTAL score will be arrived after deducting penalty score from Total score.

Subcontractor shall make available all data required for evaluation to BHEL as and when demanded.

- If safety record of the subcontractor in execution of the awarded job is to the satisfaction of safety department of BHEL, issue of an appropriate certificate to recognize the safety performance of the subcontractor may be considered by BHEL after completion of the job.
- 1.5% of running bill shall be cleared subject to certification of desired safety performance by BHEL

16 HSE PENALTIES FOR NON-COMPLIANCE

- Nonconformity of safety rules and safety appliances will be viewed seriously and BHEL has right to impose fines on the subcontractor for every instance of violation noticed.
- The applicable penalties for HSE violations are given in Format No. HSEP14-F14 of this document



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 89 of 162

3. The list of non-compliances given in above format is not exhaustive. The BHEL site in-charge has liberty to impose a penalty for any other non-compliance and incidents of any nature.
4. If principal customer or statutory and regulatory bodies impose penalty on ground of statutory non-compliance or non-compliance of HSE rules by the subcontractor or any incident of any nature including fatality or permanent disability, the same shall be passed on to the subcontractor with appropriate overhead
5. The penalty amount shall be recovered from subcontractors from the RA Bill, otherwise Final bill.

17 COMPENSATION TO ACCIDENT VICTIMS

1. BHEL shall recover the amount of compensation paid to victim(s) by BHEL towards loss of life / permanent disability due to an accident which is attributable to the negligence of contractor, agency or firm or any of its employees as detailed below.
 - b. **Victim:** Any person who suffers permanent disablement or dies in an accident as defined below.
 - c. **Accident:** Any death or permanent disability resulting solely and directly from any unintended and unforeseen injurious occurrence caused during the manufacturing/ operation and works incidental thereto at BHEL factories/ offices and precincts thereof, project execution, erection and commissioning, services, repairs and maintenance, trouble shooting, serving, overhaul, renovation and retrofitting, trial operation, performance guarantee testing undertaken by the company or during any works / during working at BHEL Units/ Offices/ townships and premises! Project Sites.
 - d. **Compensation in respect of each of the victims:**
 - i. In the event of death or permanent disability resulting from Loss of both limbs: Rs. 10,00,000/- (Rs. Ten Lakh)
 - ii. (ii) In the event of other permanent disability: Rs. 7,00,000/- (Rs. Seven Lakh)
 - e. **Permanent Disability:** A disablement that is classified as a permanent total disablement under the proviso to Section 2 (I) of the Employee's Compensation Act, 1923. "
2. In addition to above, contractor shall provide appropriate compensation to victims of major and fatal incidents as per Employee Compensation Act, 1923, ESIC Act, 1948 or as per any existing Acts and guidelines



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 90 of 162

18 INTERNAL & EXTERNAL HSE AUDITS

1. Subcontractor shall extend full co-operation and maintain necessary documents & records as required by Internal & External HSE Audit carried out by BHEL. / Third Party
2. All non-conformities and observations on HSE shall be disposed of-by subcontractor in a time bound manner as detailed in Audit Report.
3. All required corrective actions shall be taken by the subcontractor in order to avoid recurrence

19 OTHER REQUIREMENTS

1. In case of any delay in completion of a job due to mishaps attributable to lapses by the subcontractor, BHEL shall have the right to recover cost of such delay from the payments due to the subcontractor, after holding an appropriate enquiry and notifying the subcontractor suitably.

2. RISK & COST:

If the subcontractor fails to improve the standards of safety in its operation to the satisfaction of BHEL after being given reasonable opportunity to do so and/or if the subcontractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instruction regarding safety as per contractual requirements, BHEL shall have the right to take corrective steps at the risk and cost of the subcontractor after giving a notice of not less than 7 days indicating the steps that would be taken by BHEL.

3. If the subcontractor succeeds in carrying out its job in time without any fatal or disabling injury incident and without any damage to property BHEL may, at its sole discretion, favourably consider to reward the subcontractor suitably for the performance.
4. The subcontractor shall take all measures at all the sites of work to protect all persons from incidents and shall be bound to bear the expenses of every suit, action or other proceeding of law that may be brought by any persons for injury sustained, death or damage to environment



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 91 of 162

owing to neglect of the HSE precautions by the subcontractor; and shall be liable to pay any such persons such compensation, should such claim proceeding be filed against BHEL.

The subcontractor hereby agrees to indemnify BHEL against the same.

20 HSE REVIEW

BHEL shall hold HSE review meeting every month or as per requirement in order to discuss and resolve HSE issues of site and improve HSE performance. It will also discuss the incidents occurred since previous meeting, its root cause and Corrective action. The indicative agenda is given below:

1. Implementation of earlier MOM
2. HSE performance review
3. HSE inspection review w.r.t non-conformances observed and their status
4. HSE audit and CAPA
5. HSE training conducted and requirement
6. Health check-up camp
7. HSE planning for the erection and commissioning and installation activities in the coming month
8. HSE reward and promotional activities
9. HSE data analysis and improvement – Data analyzed will include non-conformances closed and pending, incident data, training data etc.

Subcontractor shall ensure presence of site in-charge, all package in-charges and safety officers, as communicated by BHEL in the meeting.

Subcontractor shall take requisite actions as per record notes and as decided in the meeting, in a time bound manner and submit compliance report to BHEL.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-ER

Rev.: 00

Date:25.04.19

Page 92 of 162

21 FORMATS USED

This is minimum list of Formats to be used for reporting by the subcontractor. Other Formats are indicated in respective HSE Procedures, Work Permits, OCPs or as specified by BHEL. The medium of reporting can be hard / soft as indicated by BHEL.

BHEL can modify these Formats or introduce new Formats to the extent necessary to get the desired performance data of all HSE activities.

SN	Format Name	Format No.	Frequency of check	Rev
1	Work at Height Permit	HSEP:14-FP01	Before start of work and regularly thereafter as per Permit conditions	00
2	Hot Work Permit	HSEP:14-FP02		00
3	Confined Space Work Permit	HSEP:14-FP03		00
4	Excavation Work Permit	HSEP:14-FP04		00
5	Radiation Work Permit	HSEP:14-FP05		00
6	Lifting Activity Work Permit	HSEP:14-FP06		00
7	Lockout-Tagout Work Permit	HSEP:14-FP07		00
8	Inspection of First Aid Box	HSEP:14-F01	Weekly	00
9	Health Check Up	HSEP:14-F02	With new Induction & as per requirement thereafter	00
10	HSE Induction / Regular / On-the-Job Training	HSEP:14-F03	With new Induction & as per requirement thereafter	00
11	Tool Box Talk	HSEP:14-F04	Daily before job start	00
12	Site HSE Report	HSEP:14-F05	Monthly	00
13	PPE Inspection	HSEP:14-F06	Weekly	00
14	PPE Issue and Receipt	HSEP:14-F06A	With new Induction	
15	Inspection of T&Ps (General)	HSEP:14-F07	Monthly / As per requirement	00
16	Inspection of Cranes	HSEP:14-F08	Monthly / As per requirement	00
17	Inspection of Winches	HSEP:14-F09	Monthly / As per requirement	00
18	Inspection of Height Working	HSEP:14-F10	Daily / As per requirement	00
19	Inspection on Welding & Gas Cutting	HSEP:14-F11	Weekly / As per requirement	00
20	Inspection on Electrical Installation	HSEP:14-F12	Weekly / As per requirement	00
21	Inspection on Elevator	HSEP:14-F13	Weekly / As per requirement	00
22	HSE Penalty	HSEP:14-F14	-	00
23	Initial Verification of PPE's & Lifting Tools & Tackles	HSEP:14-F15	As and when new PPEs and T&Ps are received	00
24	Inspection of Labor Colony	HSEP:14-F16	Monthly / as per requirement	00
25	Recording of First Aid Injuries	HSEP:14-F17	As and when such injuries occur	00
26	E-waste Handled / Generated	HSEP:14-F18	Half Yearly	00
27	Hazardous Waste at the Facility	HSEP:14-F19	Half Yearly	00
28	HSE Checklist-cum-Compliance Report	HSEP:14-F20	As per Audit Calendar	00
29	Illumination Levels	HSEP:14-F21	Weekly / As per requirement	00
30	Incident Reporting	HSEP:14-F22	-	00
31	Incident Recording	HSEP:14-F23	-	00



HSEP:14-FP01

WORK AT HEIGHT PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1	All workers on job are competent and medically fit (No Height Phobia) for working at height		
2	Hazards in the vicinity are identified, controlled and communicated to the worker.		
3	Scaffolding soundness inspected is available for use with valid tag		
4	Work platform is not made of bamboo or weak material. Barricading is available with Top, Mid Rails and Toe Guard.		
5	Working platform is clean without any unwanted material. Floor openings are covered.		
6	Access and exit to workplace are safe, marked and without obstruction.		
7	Adequate lighting provided (for dark hours) as per applicable lux standards (Refer HSEP:13)		
8	Safety nets are provided below working area.		
9	Area below the working platform has been cleared of all activity		
10	Ladders have been secured, inspected and provided as per BHEL standard/contract.		
11	Horizontal life lines are provided to cater to design specification of 2300 kg per person.		
12	Safety harness with life line support/ fall arrester are checked and available in working condition		
13	Safety shoes (non-slip), Helmet with chin strip available with employees		
14	Visible Signboards provided on working platforms in workers' understandable language		
15	All lifting / tightening tools, hand tools/equipment checked and in good condition		
16	ELCB provided for Electrical connections individually. Electrical cable, welding Hose/Compressed air hose properly secured and laid down without obstruction. Earth resistance is OK.		
17	Crane / Winch / Hydra operator is qualified and experienced		
18	Emergency response team & Medical Facilities available. Work area is cordoned off.		
19	Job Safety Analysis Submitted		
20	Additional Permits to be taken (Please specify & attach):		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):
Signature:
Name: Designation:

Site Safety Officer (Sub-Contractor):
Signature:
Name: Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):
Signature:
Name: Designation:

Site Safety Officer (BHEL):
Signature:
Name: Designation:

Package-in-charge (BHEL):
Signature:
Name: Designation:

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Work at Height Permit No. & Date: _____

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL	Site HSE Engineer, BHEL
Signature:	Signature:
Name:	Name:

General Instructions:

1	This Permit is required for working at height of 2 mtr. and above or above excavation of 2 mtr or deeper.
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day only after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work at height, height phobia needs to be ascertained and proper fitness certificate to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP02

HOT WORK PERMIT

Permit No. & Date

Project & Unit:

Emergency Contact Nos:

BHEL Sub-contractor:

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Welder is trained and qualified with good attendance in on-the-job training		
2.	Area ensured safe and free from all hazards (explosives etc.) with barricading and safe inlet / exit		
3.	Proper ventilation and lighting provided (in case of dark hours).		
4.	Gas hoses are in good condition and not cut / leaking		
5.	Pressure gauges/Flash back arrestor (at both ends) provided and in working condition.		
6.	Gas pressure in cylinder is within limits and hydraulic test certificate is available		
7.	Gas cylinders are stacked vertically and not below the welding / cutting area. Regulator key is available with cylinder. Gas cylinders covered with shields to prevent falling splinters.		
8.	Power supply to welding machine is through ELCB of 30 mA rating, which is tested and found ok; Earthing is tested and found OK		
9.	Welding machine input/output cables, welding holder and weld return clamp (Holder) are insulated and in good condition.		
10.	In case of welding in enclosed / confined spaces, the integrity of the structure and supports are ensured, Gas Testing done and evacuation system ensured in place		
11.	Emergency STOP buttons are in working condition. Welder /Helper knows how to operate it.		
12.	Welder & Fitter trained to connect ground/work return clamps (Holder) to work place prior to energization of welding machine.		
13.	Personal Protective equipment Minimum applicable: safety helmet, safety goggles, welding helmet, safety (rubber) shoes, leather gloves, long sleeve and nose mask -provided		
14.	In case of pits, water removed from the pit and wood/rubber insulation provided.		
15.	Safety signboards / cautions are in place.		
16.	Adequate and Suitable nos. of applicable firefighting extinguisher provided.		
17.	Nearby combustible material removed. Housekeeping done.		
18.	All workers explained about the hazards		
19.	First aid in attendance.		
20.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):
Signature:
Name: Designation:

Site Safety Officer (Sub-Contractor):
Signature:
Name: Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):
Signature:
Name: Designation:

Site Safety Officer (BHEL):
Signature:
Name: Designation:

Package-in-charge (BHEL):
Signature:
Name: Designation:

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Hot Work Permit No. & Date: _____

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all kinds of Hot Work eg. Welding, cutting etc..
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day only after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP03

CONFINED SPACE WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Has the equipment been Isolated from Power/Steam/Air?		
2.	Has the equipment been Isolated from liquid or gases?		
3.	Has the equipment been de-pressurized &/or drained?		
4.	Has the equipment been Blanked/blinded or disconnected?		
5.	Has the equipment been water flushed &/or steamed?		
6.	Whether man ways open and ventilated?		
7.	Whether constant Inert gas flow arranged?		
8.	Whether mechanically ventilated and adequately cooled?		
9.	Whether 24 V lighting provided inside the confined space?		
10.	Whether Radiation sources removed?		
11.	Whether training on confined space provided to the individual / group?		
12.	Whether required PPEs (hand gloves, goggles, face shield, ear plug/muff, protective clothing etc.) used?		
13.	Whether Safety harness and Lifeline used?		
14.	Whether Dust/Gas/Air Line mask used?		
15.	Whether attendant with SCBA/Air mask available?		
16.	Whether grounded air Exhaust/Blower/ AC provided?		
17.	Whether Personal Gas alarm provided?		
18.	Whether communication Equipment Provided?		
19.	Whether rescue equipment/team available?		
20.	Whether firefighting arrangement done		
21.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: *All the points mentioned in the above checklist have been checked and found OK***Permit Receiver:**

Site Engineer (Sub- Contractor):	Site Safety Officer (Sub-Contractor):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	Site Safety Officer (BHEL):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____
Package-in-charge (BHEL):	
Signature:	
Name: _____ Designation: _____	

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Confined Space Work Permit No. & Date: _____

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all confined space tasks, where injury can happen due to lack of oxygen, or chances of fire are there due to gas accumulation.
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP04

EXCAVATION WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1	Precautions taken for Underground Electrical Cable		
2	Precautions taken for Under / Above ground sewer/Drinking Water Line		
3	Precautions taken for Underground Telecommunication Line		
4	Precautions taken for Underground Product/Utility Line		
5	Precautions taken for Underground Fire Water Line		
6	Shoring / Shuttering / Sheet piling done to prevent collapse of excavation walls. Strength of Excavation wall ensured at all times		
7	Hard Barricading & Edge Protection provided		
8	Separate Safe Access for Man and Vehicle		
9	Lighting arrangement		
10	Banks Man Provided		
11	Required basic PPEs provided		
12	Slope Cutting/Benching Maintained		
13	Excavated soil / Construction Material / equipment kept away from the edge.		
14	First aid in attendance.		
15	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	
Signature:	
Name:	Designation:

Site Safety Officer (Sub-Contractor):	
Signature:	
Name:	Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	
Signature:	
Name:	Designation:

Site Safety Officer (BHEL):	
Signature:	
Name:	Designation:

Package-in-charge (BHEL):	
Signature:	
Name:	Designation:

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Excavation Work Permit No. & Date: _____

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all excavation tasks 1.22 mtr or deeper
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP05

RADIATION WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	All the persons at the site informed/removed from the area.		
2.	Area around the source of radiation cordoned off with the rope/chord.		
3.	Radiation warning symbol/boards displayed around radiography work on rope/chord.		
4.	Radiographer worn radiation badges during testing and is within safe limits.		
5.	Radiography camera and carrying case box having radiation symbol.		
6.	Radiation Survey Meter is in working condition, calibrated & within validity period.		
7.	Radiographer has valid certificate from BARC.		
8.	Blinking light provided on road during radiography (in dark hours).		
9.	Proper required Illumination provided		
10.	Safe access and working platform provided to conduct RT work		
11.	All the persons involved in Radiography work are aware of the hazard of radiation		
12.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	
Signature:	
Name:	Designation:

Site Safety Officer (Sub-Contractor):	
Signature:	
Name:	Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	
Signature:	
Name:	Designation:

Site Safety Officer (BHEL):	
Signature:	
Name:	Designation:

Package-in-charge (BHEL):	
Signature:	
Name:	Designation:

Verified by Customer Representative (if applicable), Name:	Sign:	Date:	Time:

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Radiation Work Permit No. & Date:

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all activities in which there is danger of exposure to harmful radiation
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP06

LIFTING ACTIVITY WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Crane used for lifting activity TPI tested, certified and approved for rated lifting		
2.	All lifting tackles, gears/appliances are tested and certified for lifting works.		
3.	Crane operator is trained and competent for lifting operation.		
4.	Lifting sling/ belt is protected against sharp edge of the jobs to be lifted.		
5.	Lifting hook is properly latched to prevent material falling over		
6.	Access and exit marked and without obstruction.		
7.	In case of lifting multiple materials at once, same are tied up with strong rope / material		
8.	Area below lifting activity barricaded to prevent movement		
9.	Minimum 2 guidelines have been provided for balancing and guiding jobs to be lifted.		
10.	Periphery area of crane booms as well as lifting job is barricaded and unauthorized/no-entry sign board posted.		
11.	Rigger and signal man is trained and competent for lifting work. Signal is clearly visible to the operator and understood		
12.	No lifting activity to be carried out during lightening, heavy wind/rain. No forecast of these conditions during work period		
13.	If scaffolding to be used during lift, scaffolding with valid tag available for use.		
14.	Add drawing /procedure etc. relevant for the lifting.		
15.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	Site Safety Officer (Sub-Contractor):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	Site Safety Officer (BHEL):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____
Package-in-charge (BHEL):	
Signature:	
Name: _____ Designation: _____	

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Lifting Activity Work Permit No. & Date: _____

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL	Site HSE Engineer, BHEL
Signature:	Signature:
Name:	Name:

General Instructions:

1	This Permit is required for all Heavy Lifting Activities that are either / all of the following: 1. Above 50 Tons; 2. Tandem Lifting; 3. Total Load exceeding 75% of capacity of crane; 4. Lift of unusual difficulty or geometry or rigging; 5. Lift over operating Units; 6. Any other Lift as decided by Site HSE / Erection
2	Job Safety Analysis (JSA) to be created for every Lift above 5 Tons.
3	This permit must be available at the work site all the times of the work.
4	Location and description of the work, and terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy: Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.



HSEP:14-FP07

LOCKOUT/TAGOUT (LIVE ELECTRICAL MAINTENANCE) WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

Tag No.	Device to be Tagged / Locked I.D. No.	Device Location	Device Position OPEN / CLOSED - ON/OFF	Lock No.	Tag Lock Placed by Name/Sign - Date/Time	Tag / Lock Removed by Name/Sign - Date/Time

Declaration: *All the points mentioned in the above checklist have been checked and found OK***Permit Receiver:**

Site Engineer (Sub- Contractor):	Site Safety Officer (Sub-Contractor):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	Site Safety Officer (BHEL):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____
Package-in-charge (BHEL):	
Signature:	
Name: _____ Designation: _____	

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Lockout/Tagout Work Permit No. & Date: _____

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all maintenance and erection activities with danger of electrocution from Live Electric Power
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work, and terms applicable must be clearly indicated by the permittee.
4	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
5	Permit shall be issued for not more than 7 days including the issue date.
6	Permit shall be returned to the HSE Department of BHEL after completion of the job.
7	Before engaging anybody to work, competency and fitness to be ensured.
8	All safety precautions to be taken as per work site HSE plan.
9	Distribution of copy: Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.

**POWER SECTOR****Inspection of First Aid Box**

FORMAT NO: HSEP:14-F01

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site :	
Name of Sub-Contractor:	
Inspected by :	
Date of Inspection:	

Number of employees in the site: - _____

Sl. No.	Item	No. Available	Remarks
1	No. of small sterilized dressings		
2	No of medium sized sterilized dressings		
3	No of large sized sterilized dressings.		
4	No of large sized sterilized burn dressings		
5	No of (15 grams) packets sterilized cotton wool		
6	No of pieces of sterilized eye pads in separate sealed packets.		
7	No of roller bandages 10 cm wide.		
8	No of roller bandages 5 cm wide.		
9	Whether tourniquet available		
10	Whether supply of suitable splints available.		
11	No of packets of safety pins.		
12	Whether kidney tray available		
13	Whether sufficient number of eye wash bottles, filled with distilled water or suitable liquid, clearly indicated by a distinctive sign which shall be visible at all times, available.		
14	Whether 4%-xylocaine eye drops, and boric acid eye drops and soda by carbonate eye drops available.		
15	Whether (60ml) bottle containing a two percent alcoholic solution of iodine available		
16	Whether (two hundred ml) bottle of mercurochrome (2 per cent) solution in water available.		
17	Whether 120ml bottle containing Sal volatile having the dose and mode of administration indicated on the label,		
18	Whether roll of adhesive plaster (6 cm X 1 meter) available		

**POWER SECTOR****Inspection of First Aid Box**

FORMAT NO: HSEP:14-F01

REV NO.: 00

PAGE NO. 01 OF 02

Sl. No.	Item	No. Available	Remarks
19	No of rolls of adhesive plaster (2 cm X 1 meter)		
20	Whether snake bite lancet available.		
21	Whether (30 grams) bottle of potassium permanganate crystals available.		
22	Whether a pair scissors available		
23	Whether copy of the First-Aid leaflet issued by the Director-General, Factory Advice service and labor Institutes, Government of India available.		
24	Whether bottle containing 100 tablets (each of 5 grains) of aspirin available		
25	Whether Ointment for burns available		
26	Whether bottle of a suitable surgical anti-septic solution available		
27	Whether List of Contents pasted on First Aid Box along with respective expiry dates		

Signature of Subcontractor's Site I/C

Date:

**POWER SECTOR****Health Check-Up**

FORMAT NO: HSEP:14-F02

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site :	
Name of Sub-Contractor:	
Name of Employee :	
Age:	

History Of Past Illness	H/O Epilepsy:
	H/O Drug Allergy:
	H/O Diabetics/ Hypertension:
	H/O Unconsciousness:
Personal History	

EXAMINATION**OBSERVATION****General Physical Examination**

Height		
Weight		
BMI		
Built And nourishment		
Pallor		
Temperature		
Chest Expansion	Inspiration	Expansion
Lymph Node Enlargement		
Upper Limbs Strength & Function		
Lower Limbs Strength & function		
Spine Adequately flexible for the job concerned (Yes/No)		
Mental alertness and stability with good eye, hand and foot co-ordination.		

Ear, Nose, Throat

Ear / Hearing	
Nose	
Throat	
<u>Vision</u>	
Left Eye	Right Eye

**POWER SECTOR****Health Check-Up**

FORMAT NO: HSEP:14-F02

REV NO.: 00

PAGE NO. 02 OF 02

EXAMINATION		OBSERVATION	
<u>Cardiovascular System Examination</u>			
Inspection			
Palpation	Pulse	BP	
Auscultation (Heart Sounds)			
<u>Respiratory System</u>			
Inspection	Respiratory Rate		
Palpation:			
Percussion			
Auscultation (Breath Sounds)			
<u>Examination of Abdomen</u>			
Inspection			
Palpation			
Auscultation (Bowel Sounds)			
Any Other			
Clinical Impression			

Signature of the examining doctor

Date:

**POWER SECTOR****HSE Induction / Regular / On-the-Job
Training Records**FORMAT NO: HSEP:14-F03
REV NO.: 02
PAGE NO. 01 OF 01

Name of Site :					
Name of Sub-Contractor :					
Date of Training (dd/mm/yyyy) :		Duration (Hrs)			
		From		To	
Name & Details of Trainer:					
Subject of Training	Induction		On-The-Job Training (Give details)		
Name of Training Co-ordinator:					

Sl. No.	Name	Designation	Organization	Signature

I certify that Training has been carried out as per HSEP04: HSE Procedure for Training & Awareness

Signature of Training Coordinator

Date:

**POWER SECTOR****Toolbox Talk**

FORMAT NO: HSEP:14-F04

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Sub-Contractors Name :	
Date :	

Topic	Name of person delivered Tool Box Talk	No. of Participants attended	Remarks

Signature of Site I/C of Subcontractor

Date:

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 01 of 6

Name of subcontractor:	Report Month:

A) Accidents/Incidents Details: -

a	Lost time in Accidents	No. of incidents	Man Hours Lost	No. of People Involved	No. of person reported to Govt.	
	For the Month					
	Cumulative					
b	Minor Injuries					
	For the Month					
	Cumulative					
c	Fires	No. of Near-Misses	No. of First- Aid cases	No. of persons injured	No. of equipment damaged	No. of Fire reported Outside
	For the Month					
	Cumulative					
d	Other mishaps not covered in a, b, c.	No. of Near-Misses	No. of First- Aid cases	No. of persons injured	No. of equipment damaged	Total near misses and First-Aid
	For the Month					
	Cumulative					

B) Data for Man-hours worked:

Details	Value	Remarks if any
No. of people		
Man Hours worked		
O.T. Hours		
Total Man Hours		
Grand Total of man hours worked during the month(A+B)		
Cumulative man-hours (from _____ to _____): (Since commencing of operations)		

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 02 of 6

C) Status of Deployment of Work force, Safety Officers/Supervisors & Construction Medical Officer(s) & Electricians:

Description	Name	Qualification & Experience
Safety Officers		
Safety Supervisors		
Construction Medical Officer		
Nursing Staff.		
Electricians		
Scaffolding Inspectors		
T&P Inspectors		

D) Status of deployment of manpower for critical HSE activities:

(All height work and other hazardous activities to be actively supervised by trained personnel. Area to be divided in manageable sections to ensure effective supervision at all times. For example, multiple elevations in a structure can be divided among multiple supervisors)

Activity	Location	Shift Timings	Personnel deployed	Remarks
Height Work	Boiler Unit- (Level 1-3)			
	Boiler Unit- (Level 4-6)			
	ESP			
Housekeeping	Boiler Unit-			
	ESP Unit			
Others				

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 03 of 6

E) Lifting Tools, Tackles, Equipment and Pressure Vessels:

Item	Nos. Deployed	Nos. Tested by competent person	Identification Nos. (Comma separated) (A)	Validities of Test Certificates (Comma separated – corresponding to column A)	Whether internal testing using Color Coding or similar system done
Winches					
Chain Blocks					
Wire Rope Slings					
Man Cages					
D-Shackles					
Air Compressors					
Crawler Cranes					
Mobile Cranes					
Hydra Cranes					
Hydraulic Jack					
Others					

F) Reverse Horns in Construction Vehicles:

Item	Nos. Deployed with serial numbers (Comma separated) (A)	Nos. Having Functional reverse horns	Inspection Dates (Comma separated corresponding to column A)
Transit Mixers			
Hydra Cranes			
Dumpers/Trippers			
Backhoes			
Other Vehicles			

G) ELCBs:

No. Of ELCBs provided with Serial Nos. (Comma separated) (A)	Nos. Functional	When They were last Tested (Comma separated corresponding to column A)

H) Electrical Earthing:

No. Of Earth resources with serial numbers and locations (Comma separated) (A)	Whether Double Earthing provided to all equipment	When they were last tested (Comma separated corresponding to column A)

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 04 of 6

I) Fire Extinguishers

Name & designation of person responsible for maintenance of Extinguishers at different locations : (Individual subcontractor's Safety Officers).

A. FIRE EXTINGUISHERS AT ERECTION SITE:

Type (Add more rows if required)	Sizes	Qty + Serial numbers (Comma separated) (A)	Healthiness – Last checked dates (Comma separated corresponding to column A)	Locations (Comma separated corresponding to column A)
FOAM TYPE				
SODA TYPE				
DRY TYPE (DCP)				
C02 TYPE				

B. FIRE EXTINGUISHERS AT SITE OFFICES & STORES:

Type	Size (Add more rows if required)	Qty + Serial numbers (Comma separated) (A)	Healthiness – Last checked dates (Comma separated corresponding to column A)	Locations (Comma separated corresponding to column A)
FOAM TYPE				
SODA TYPE				
DRY TYPE (DCP)				
C02 TYPE				

J) Tie-Ups with Emergency Services

Service (Add more rows if required)	Name, location & distance from site	Emergency contact details	Remarks
Hospital with ICU and facilities for orthopedic, neurological etc. trauma			
Fire services			
Others:			

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**FORMAT NO: HSEP:14-F05
REV NO.: 00
Page 05 of 6**K) Implementation of Checklist, Work Permits:**

Item	Numbers During the Month	Major Deviations

Note:- Please attach photocopies of all filled Checklists & Work permits for that month.

L) Personal Protective Equipment Issued (Extend table for each subcontractor):

Item	Issued this Month	Nos. Issued up to the Month	Percentage of usage at Site (as per physical verification)
Name of subcontractor:			
Safety Helmet			
Safety Shoes			
Full Body Harness			
Fall Arrestor			
Safety Nets			
Hand Gloves			
Face shield			
Welder shield			
Nose Mask			
Reflective Jacket			
Other PPEs.			

M) Safety Observations by Subcontractor Executives- Observations package wise:

Topic	Date Of Programme	No. Of Participants	Level Of Participants

• Tool-Box talks on Safety:

Date	Tool Box Talk - No of Participants	Topic	Remarks

• Safety Induction Trainings:

Date	Safety Induction No. of Participants	Topic	Remarks

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 06 of 6

N) Progress of Management Programmes at Site

SL	Description Of MPs	Annual Plan	Achievement In This Month	Cumulative Achievement
A. Environment Improvement Programme				
1	Plantation of Trees			
2	Installation of Scrap Bins			
3	Chemical Storage & Handling system			
B. Improvement of Working Environment				
4	Increasing LTI free days			
5	Air Quality Monitoring			
6	Water Quality Monitoring			
7	Illumination level Monitoring			

O) HR Information:

Designation	Total No. Inducted	Total no. of Induction Balance	Total no. of Gate Pass Issued	Total no. of Gate Pass Balance	Total no. of Gate Pass Cancelled	Medical Checkup Completed	Medical Checkup Balance

P) Rewards on Account of Good Safety Performance

Serial Number	Reward Issued to	Details of Reward Issued (Amount etc.)	Brief Reason

Note: Photos of Reward Functions to be attached**Q) Other Safety initiatives / Safety Activities conducted (with photos, if any):**

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Personal Protective Equipment Inspection**

FORMAT NO: HSEP:14-F06

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Item	Total Checked	Numbers Found in Order	Remarks
Safety Helmet			
Safety Shoes			
Full Body Harness			
Fall Arrestor			
Safety Nets			
Hand Gloves			
Face shield			
Welder shield			
Nose Mask			
Reflective Jacket			
Other PPEs (Specify)			

Signature of Site I/C of Subcontractor:

Date:



POWER SECTOR

Format for Register of Issue and Receipt of PPEs

Site:

Subcontractor:

[illegible]

**POWER SECTOR****Inspection Of T&Ps**FORMAT NO: **HSEP:14-F07**

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Date of Inspection :	

Sl.No.	Description	Remarks
1.0	Name of equipment	
2.0	Basic Information of equipment	
2.1	Specification	
2.2	Sr. No. of equipment	
2.3	Make	
2.4	Year of manufacture	
3.0	Major repairs / overhauls(Furnish details of work carried out)	Date(s) of major repair/overhaul
3.1		
3.2		
3.3	Repairs carried out at site	
4.0	Any performance test conducted	Yes/No
5.0	Document Submitted	Yes/No
6.0	Manufacturer's test / guarantee certificate	Available/ Not available
7.0	Performance test	Done/ Not Done
8.0	Acceptance Norms	
9.0	Committee Observations	
10.0	Date of next review (if accepted)	
Signature-Subcontractor HSE Officer		Signature-Subcontractor Site In-charge

**POWER SECTOR****Inspection Of Cranes**

FORMAT NO: HSEP:14-F08
REV NO.: 00
PAGE NO. 01 OF 01

Name of Site :**Name of Sub-Contractor :****Inspected by :****Date of Inspection:****Crane Reg. No (Make/Model)****Name of Driver/Operator**

Sl.no.	Description	Observation	Measures
1	Valid Driving license		
2	Hook & Hook Latch		
3	Over Hoist limit switch		
4	Boom limit switch		
5	Boom Angle Indicator		
6	Boom limit cutoff switch		
7	Condition of Boom		
8	Condition of ropes		
9	Number of load lines		
10	Size and condition of the slings		
11	Stability of the cranes		
12	Soil Condition		
13	Swing Break And Lock		
14	Proper Break And Lock		
15	Hoist Break And Lock		
16	Boom Break And Lock		
17	Main Clutch		
18	Leakage in Hydraulic Cylinders		
19	Out riggers fully extendable		
20	Tyre pressure		
21	Condition of Battery And Lamps		
22	Guards of moving and rotating parts		
23	Load chart provided		
24	Number and position of pedant ropes		
25	Reverse Horn		
26	Load Test Details		
27	Operator's fitness		
28	Pollution under control certificate		
29	Fire extinguisher of appropriate type.		
30	Training of the operator		

Signature of Site I/C of Subcontractor:**Date:**

**POWER SECTOR****Inspection Of Winches**FORMAT NO: HSEP:14-F09
REV NO.: 00
PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Winch Reg. No (Make/Model) _____

Name of Operator _____

Sl. No.	Description	YES	NO	NA	Remarks
1	Has the copy of Third Party Inspection certificate been provided in winch machine shed?				
2	Is safe operating instructions displayed near winch?				
3	Is winch machine operator experienced enough to operate the winch machine?				
4	Is the winch machine operated by someone other than the winch machine operator?				
5	Is there guard provided in all moving parts like wheel and motor's shaft?				
6	Will it protect against unforeseen operational contingencies?				
7	Are brakes, clutch and locking arrangement working properly?				
8	Has it been ensured that the guard does not constitute a hazard by itself?				
9	Are the cranks and the connecting rods protected by guardrails?				
10	Is there provision for fully covered shed with wooden plank roof?				
11	Is wire rope free from any kind of damage or wear and tear?				
12	Is split pin provided for the protection of clutch and brake locking arrangement?				
13	Is pulley inspected by competent person and certified before use?				
14	Is pulley free from any wear and tear visually?				
15	Is winch rope barricaded with clipsheet for the protection of rope and person?				
16	Is the wire rope lubricated by cardium oil?				
17	Is there any friction in wire rope which may damage the wire rope rather than the rolling parts?				
18	Is there any oil leakage in the hydraulic system of the winch machine?				
19	Has it been ensured that the guard will not cause discomfort or inconvenience to operator?				
Total NO		Total NA		% Compliance	

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection of Height Working**

FORMAT NO: HSEP:14-F10

REV NO.: 00

PAGE NO. 01 OF 2

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Sl. No.	Descriptions	Observation (Yes/No)	Remarks
A. General			
1	All the workers have been explained safe work method?		
2	Adequate illumination has been ensured.		
3	Work area inspected prior to the start of the work.		
4	Is the work area barricaded to prevent fall and platforms are of adequate strength (bamboo, jute / plastic ropes not to be used).		
5	The temporary work platforms & structures for height work including those used in Boiler structures, water walls, ESP, Powerhouse are fully barricaded with railings (as per IS 3696)		
6	Fabricated makeshift arrangements are checked for quality and type of material welding, anchoring etc.		
7	Are floor gaps, permanently covered and barricaded		
8	Area below the work place barricaded, particularly below hot work.		
9	Workers provided with bags /box to carry bolts, nuts and hand tools		
10	Arrangement for fastening hand tools made.		
11	All work platforms ensured to be of adequate strength and ergonomically suitable.		
12	Work at more than one elevation at the same segment is restricted.		
13	An established communication system has been established and explained to the workers.		
B. Access/Egress			
1	Walkways provided with handrail, mid-rail and toe guard?		
2	All checkered plates, gratings properly welded/ bolted?		
3	Are ladders inspected and they are in good condition?		
4	Are ladders spliced?		
5	Are ladders properly secured to prevent slipping, sliding or falling?		
6	Stairs erected above and below 1 tier column for safe access?		
7	Do side rails extend 36" above top landing?		

**POWER SECTOR****Inspection of Height Working**

FORMAT NO: HSEP:14-F10

REV NO.: 00

PAGE NO. 02 OF 2

Sl. No.	Descriptions	Observation (Yes/No)	Remarks
8	Are built up ladders constructed of sound materials?		
9	Are rugs and cleats not over 12" on center?		
10	Metal ladders not used around electrical hazards.		
11	Proper maintenance and storage.		
12	Ladders placed at right slope.		
13	Ladders / staircases welded/ bolted properly.		
14	Any obstruction in the stairs.		
15	Are landing provided with handrails, knee rails, toe boards etc.?		
16	Whether ramp is provided with proper slope.		
17	Proper hand rails / guards provided in ramps.		
C. Housekeeping			
1	Walkways, aisles & all overhead workplaces cleared of loose material.		
2	Is any nut bolt/scrap left on beam/column?		
3	Flammable materials, if any, are cleared.		
4	All the de shuttering materials are removed after de shuttering is done.		
5	Platforms and walkways free from oil/grease or other slippery material.		
6	Collected scrap are brought down or lowered down and not dropped from height.		
D. PPE And Safety Devices			
1	Use of safety helmet, safety belts ensured for all workers		
2	Anchoring points provided at all places of work.		
3	Common lifeline provided wherever linear movement at height is required.		
4	Safety nets are use wherever required.		
5	Proper fall arrest system is deployed at critical workplaces.		
6	Crawler boards/Safety system or works on fragile roof are used.		
7	Is man-lift being used for personnel lifting?		
8	Does man basket / personnel lift system has an independent lifeline and all occupants safety harnesses connected to it with rope grab?		

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection of Welding and Gas Cutting**

FORMAT NO: HSEP:14-F11

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Welding				
Sl.no.	Description	Y e s	N o	Remarks
1	Is electric connection given through 30 mA ELCB/RCCB to welding m/c?			
2	Is welding machine more than 10 years old?			
3	Is there provision of fuse and is it bypassed?			
4	Is electric cable fitted properly in junction box on m/c?			
5	Is electrical cable free from joints?			
6	Are the joints attached firmly & insulated with tape?			
7	Is double earthing given to body of m/c?			
8	Is the physical condition of the m/c good?			
9	Is ON/OFF switch connected to the m/c is working and in good condition?			
10	Are indication lamps on m/c working?			
11	Is the electrode holder in good condition?			
12	Are the cables of the welding m/c lugged & tight properly?			
13	Is cable to welding machine terminal joint loose / burnt / glowing?			
14	Are return lead connected properly (Rod, Angle, Channels shall not be used)			
	Total No of NO			
	Total No of YES			

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection of Welding and Gas Cutting**

FORMAT NO: HSEP:14-F11
REV NO.: 00
PAGE NO. 02 OF 02

Gas Cutting				
Sl.no	Description	Yes	No	Remarks
1	Are Cylinders kept on trolleys?			
2	Physical condition of Gas cylinders Good?			
3	Is there Oil/Grease on valve of the cylinder?			
4	Are pressure regulators in good condition?			
5	Condition of hose pipe OK?			
6	Are hose pipe clamped with hose clip?			
7	Is flash back arrestor & NRV fitted on torch both for O2 and LPG cylinder?			
8	Is nozzle of the torch cleaned?			
	Total Number of NO			
	Total No of YES			
	% Compliance			

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection Of Electrical Installation**

FORMAT NO: HSEP:14-F12

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Sr. No.	Contents	Yes/No	Remarks
A	Cable		
1.	Whether the condition of cable is checked?		
2.	Are cables received from other sites checked for insulation resistance before putting them into use?		
3.	Are all main cables taken either underground / overhead?		
4.	Are welding cables routed properly above the ground?		
5.	Are welding and electrical cables overlapping?		
6.	Is any improper joining of cables/wires prevailing at site?		
B	DBs/SDBs		
1.	Is earth conductor continued up to DB / SDB?		
2.	Whether DBs and extension boards are protected from rain / water?		
3.	Whether DB and extension board have separate MCB/ELCB		
4.	Is there any overloading of DBs / SDBs?		
5.	Are correct / proper fuses & CBs provided at main boards and sub-boards?		
6.	Is energized wiring in junction boxes, CB panels & similar places covered all times?		
C	ELCB		
1.	Whether the connections to all equipment are routed through individual ELCBs?		
2.	Is sensitivity of each ELCB maintained at 30 mA?		

**POWER SECTOR****INSPECTION OF ELECTRICAL INSTALLATION**

FORMAT NO: HSEP:14-F12

REV NO.: 00

PAGE NO. 02 OF 02

Sr. No.	Contents	Yes/No	Remarks
3.	Are the ELCB numbered and tested periodically & test results recorded in a logbook countersigned by a competent person?		
D	Grounding		
1.	Is natural earthing ensured at the source of power (main DB at Generator or Transformer)?		
2.	Whether the continuity and tightness of the earth conductor are checked?		
3.	Mention the gauge of the earth conductor used at the site.		
4.	Mention the value of Earth Resistance.		
E	Electrically operated Machines or Accessories.		
1.	Whether the plug top is provided everywhere.		
2.	Are all metal parts of electrical equipment and light fittings / accessories grounded / double earthed?		
3.	Is there any shed or cover for welding machines?		
4.	Are halogen lamps fixed at proper places?		
5.	Are portable power tools maintained as per norms?		
6.	Any other information:		

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection of Elevator**

FORMAT NO: HSEP:14-F13

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Sr. No.	Description	Remarks
1.0	Name of equipment	
2.0	Basic Information of equipment	
2.1	Specification	
2.2	Sr. No. of equipment	
2.3	Make	
2.4	Year of manufacture	
3.0	Major repairs/overhauls(Furnish details of work carried out)	Date(s) of major repair/overhaul
3.1		
3.2		
3.3	Repairs carried out at site	
4.0	Any performance test conducted	Yes/No
5.0	Document Submitted	Yes/No
6.0	Manufacturer's test / guarantee certificate	Available/ Not available
7.0	Performance test	Done/ Not Done
8.0	Acceptance Norms	
9.0	Committee Observations	
10.0	Date of next review (if accepted)	

Signature-Subcontractor/ Subcontractor's Safety Officer

Signature-Site Safety Officer (BHEL)



POWER SECTOR
HSE Penalty Format

FORMAT NO: HSEP:14-F14
REV NO.: 00
PAGE NO. 01 OF 2

Sub: MEMO for Penalty for non-compliances in Safety and Fabrication Quality requirement

Following lapse (tick marked) was observed and penalty is imposed as stated at the bottom of this memo. It is requested that such occurrences may please be avoided in future.

S. No	Nature of Non - Compliance	Penalty (in Rs.)	Remarks
A. PPEs			
1.	Not wearing safety helmet / wearing without chin straps	500	Per Person/ day
2.	Not Wearing safety shoes	500	Per Person/ day
3.	Not wearing gloves, nose masks where required	350	Per Person/ day
4.	Not using grinding goggles while doing grinding operations	500	Per Person/ day
B. Height Work			
1.	Not providing Lifelines for height work	1000	Per location per day
2.	Not ensuring barricading of working platforms	1000	Per location per day
3.	Not using temporary platform during work at height	1000	Per case per day
4.	Not wearing safety belt while working at height (> 2 meters) or not anchoring to lifeline	2000	Per Person/ day
5.	Not providing proper barricades (caution tape at 2 elevations)	500	Per location per day
	Use of mobile phones by Height worker / Crane / Hydra Operator	1000	Per case per day
C. Electrical			
1.	Not using 24 V supply for lighting in confined spaces	500	Per case per day
2.	Lack of Electrical Earthing	2000	Per case per day
3.	Improper earthing of welding & Other electrical Machines. Earth resistance not OK	500	Per Machine per incidence
4.	Electrical plug not used for connection/ hand machines	500	Per connection per incidence
5.	Unsafe electrical practice like not installing ELCB/ RCCB	500	Per case per day
6.	Using frayed/ broken welding cables	500	Per machine per week
D. Lifting			
1.	Use of lifting equipment without having valid Third Party Test certificate	5000	Per equipment per seven days
2.	Lifting hooks without latches	500	Per hook per day
3.	Using damaged slings or not slinging properly	2000	Per event Per T&P
4.	Lifting cylinders without cage or rolling of cylinders	500	Per Event per incidence
5.	Non removal of scrap from platforms	1000	Per Event Per location per 7 days
E. Hot Work / Cylinder Handling			
20.	Gas cutting without flash back arrestor	2000	Per machine per incidence
21.	Gas cutting at height without sheet below	500	Per event
22.	Not keeping gas cylinders vertically / in trolley on ground	500	Per event
23.	Gas cutting with damaged hose pipes	500	Per event
	Not covering welding cylinder with top cover	500	Per event
F. Construction Vehicles			
24.	Not having valid driving license for the type of vehicle/ T&P	2000	Per driver per event
25.	Two wheeler entry in construction area	500	Per vehicle
26.	Using Hydra for material movement at site in unsafe manner	1000	Per case
27.	Using Two Hydra in Tandem for material movement	2000	Per case
28.	Vehicles, Hydras, Cranes, Dumpers and Earth Movers not having automatic back horns linked to gear	1000	Per Equipment per day
29.	Not using guide rope while moving material using Hydra or Crane	1000	Per event
30.	Violating speed limit during vehicle movement	1000	Per event

	POWER SECTOR	FORMAT NO: HSEP:14-F14 REV NO.: 00 PAGE NO. 02 OF 2
	HSE Penalty Format	

	Nature of Non - Compliance	Penalty in Rs.)	Remarks
Engineering / Administrative Controls / General			
31.	Major Accident – Victim not reporting for work within 48 hours – resulting in partial loss in earning capacity & termination / demotion in employment	200000	
32.	Fatal Accident/Accidents Resulting in total Loss in Earning Capacity #	500000	Per victim#
33.	Unsafe Act in violation of standards / clauses of this document	500-5000	Per case
34.	Activity carried out without safety work permit where applicable	2000	Per person per event
35.	Using untrained / unqualified personnel for hazardous work	2000	Per event
36.	Not maintaining proper hygiene in canteen as per BOCW	1000	Per event

or as deducted by customer, whichever is higher.

For repeated **major and** fatal incidents under the same subcontractor for the same package in the same Unit, the subcontractor will pay 2 times the penalty compared to previously paid

Details (if any) related to non- compliance (Name of persons, Nature of deficiency, etc.)

Penalty imposed:

1, Rate as per above chart_____

2. No. of Persons/ machine/ event/ labor_____

3. Total Penalty= 1. X 2. =_____

BHEL Personnel:

Signatures:

Name_____

Attachments: Photographs & Documentary proof (if available) for violation

Distribution: 1 Copy: to Sub- contractor Site In-charge,
1 Copy to Site Construction Manager (BHEL)

POWER SECTOR

**POWER SECTOR****Format for Inspection of Labor Colony**

FORMAT NO: HSEP:14-F16

REV NO.: 00

PAGE NO. 01 OF 1

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

S. No	Particulars	No	Yes	Comments
1	Sufficient living space ensured for each occupant with Kitchen area			
2	Area cleanliness ensured through regular cleaning			
3	Toilet facility sufficient for all occupants available, in order with adequate lighting, cleaned regularly and in hygienic condition			
4	Washing facilities available with adequate water supply			
5	Availability of sufficient drinking water in protected tanks with weekly tank cleaning and source tested annually as per IS10500 ensured			
6	Adequate drainage to remove waste and rain water, no flooding			
7	"Unsafe for Drinking" posted near accessible non-potable water and sources; posted in language of occupants or universal symbol			
8	Prevention of mosquitoes, flies, and rodents in immediate housing area through insecticide sprays if required			
9	Electricity provided & electrical connections safety ensured			
10	Fans, Coolers / Quilts, Heaters provided as required to cater to weather conditions along with adequate electricity supply			
11	Houses Walls and roof tight and solid; floors rigid and durable, with smooth, cleanable finish in good repair			
12	Availability of nominal rate ration / common use items shop within / nearby the colony			
13	Emergency medical plan developed: (A) Potential injuries determined (B) Local EMS response determined (C) Qualified first-aid person on site, if required			
14	Emergency plans posted where employees gather			
15	Transportation to nearest suitable facility			

Any other checks:

Remarks:	Name & Sign. Of Subcontractor HSE Officer			



POWER SECTOR

Format for Recording of First Aid Injuries

FORMAT NO: HSEP-14-F17
REV NO.: 00
PAGE NO. 01 OF 1

Name of Site:	Name of Subcontractor:

[illegible]

**POWER SECTOR****Format for Maintaining Records of E-waste
Handled / Generated**

FORMAT NO: HSEP:14-F18

REV NO.: 00

PAGE NO. 01 OF 1

(Generated Quantity in Metric Tons (MT) per year)

Site		
Subcontractor		
Date		
Types & Quantity of e-waste handled/generated**	Category	Quantity
	Item Description	
Types & Quantity of e-waste stored	Category	Quantity
	Item Description	
Types & Quantity of e-waste sent to collection center authorized by producer/dismantler/recycler/refurbisher or authorized dismantler/ recycler or refurbisher **	Category	Quantity
	Item Description	
Types & Quantity of e-waste transported*	Category	Quantity
	Item Description	
Name, address and contact details of the destination		
Types & Quantity of e-waste refurbished*	Category	Quantity
	Item Description	
Name, address and contact details of the destination of refurbished materials		
Types & Quantity of e-waste dismantled*	Category	Quantity
	Item Description	
Types & Quantity of e-waste recycled*	Category	Quantity
	Item Description	
Types & Quantity of materials recovered	Quantity	
Name, address and contact details of the destination		
Types & Quantity of e-waste sent to recyclers by dismantlers	Category	Quantity
	Item Description	
Name, address and contact details of the destination		
Types and Quantity of other waste sent to respective recyclers by dismantlers / recyclers of e-waste	Category	Quantity
	Item Description	
Types and Quantity of e-waste treated & disposed	Category	Quantity
	Item Description	
Name, address and contact details of the destination		

Signature of Subcontractor Site In-charge:

Date

**POWER SECTOR****Format for Maintaining Records of Hazardous Waste at the Facility**

FORMAT NO: HSEP:14-F19

REV NO.: 00

PAGE NO. 01 OF 1

1. Name of Site:
2. Name of the Subcontractor:
3. Date:
4. Description of hazardous waste:

Physical form with description	Chemical form	Total volume and weight (in kg.)

5. Description of storage and treatment of hazardous waste:

Date	Method of storage of hazardous wastes	Date	Method of treatment of hazardous wastes

6. Details of transportation of hazardous waste:

Name & address of consignee of package	Mode of packing/of the waste for transportation	Mode of transportation to site of disposal	Date of transportation

7. Details of disposal of hazardous waste:

Date of disposal	Concentration of hazardous material in the final waste form	Site of disposal (identify the location on the relevant layout drawing for reference)	Method of disposal	Persons involved in disposal

8. Data of environmental surveillance:

Date of measurement	Analysis of ground water			Analysis of soil samples			Analysis of air sampling			Analysis of any other samples (give details)
	Location of sampling	Depth of sampling	Data	Location of sampling	Depth of sampling	Data	Location of sampling	Data		

9. Details of the hazardous wastes reused and recycled:

Date	Total quantity of hazardous waste generated	Details of hazardous waste minimization activity	Material received	Final quantity of waste generated	Net reduction in waste generation quantity and percentage

Signature of Subcontractor Site In-charge:

Date:

**POWER SECTOR****HSE Audit / Inspection Checklist-cum-Compliance Report**

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 01 OF 3

PROJECT: _____

CONTRACTOR: _____

DATE: _____

OWNER : _____

INSPECTION BY: _____

Note : write 'NA' wherever the items is not applicable

Item	Y e s	N o	Remarks	Action
HOUSEKEEPING				
Waste containers provided and used				
Passageways and walkways clear				
General neatness of working area				
Other				
PERSONNEL PROTECTIVE EQUIPMENT				
Goggles; shields				
Face protection				
Hearing protection				
Respiratory masks etc.				
Safety belts				
Other				
EXCAVATIONS / OPENINGS				
Openings properly covered or barricaded				
Excavations shored				
Excavations barricaded				
Overnight lighting provided				
Other				
WELDING, CUTTING				
Gas cylinders chained upright				
Cable and hoses not obstructing				
Fire extinguisher (s) accessible				
Others				
SCAFFOLDING				
Fully decked platforms				
Guard and intermediate rails in place				
Toe boards in place				
Adequate shoring				
Adequate access				
Others				
LADDER				
Extension side rails 1 m above				
Top of landing				
Properly secured				
Angle + 70° from horizontal				
Other				



POWER SECTOR

HSE Checklist-cum-Compliance Report

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 02 OF 3

HOISTS, CRANES AND DERRICKS				
Condition of cables and sheaf OK				
Condition of slings, chains, hooks OK				
Inspection & maintenance log maintained				
Outriggers used				
Signals observed and understood				
Qualified operators				
Others				
MACHINERY, TOOLS & EQUIPMENT				
Proper instruction				
Safety devices				
Proper cords				
Inspection and maintenance				
Other				
VEHICLE AND TRAFFIC				
Rules and regulations observed				
Inspection and maintenance				
Licensed drivers				
Other				
TEMPORARY FACILITIES				
Emergency instructions posted				
Fire extinguishers provided				
Fire-aid equipment available				
General neatness				
Others				
FIRE PREVENTION				
Personnel instructed				
Fire extinguishers checked				
No smoking in prohibited areas.				
Hydrants				
Clearance				
Others				
ELECTRICAL				
Proper wiring				
ELCB's provided				
Ground fault circuit interrupters				
Protection against damage				
Prevention of tripping hazards				
Other				
HANDLING & STORAGE OF MATERIALS				
Properly stored or stacked				
Passageways clear				
Other				
FLAMMABLE GASES AND LIQUIDS				
Containers clearly identified				
Proper storage				
Fire extinguisher nearby				
Other				

**POWER SECTOR****HSE Checklist-cum-Compliance Report**

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 03 OF 3

WORKING AT HEIGHT				
Safety nets				
Safety belts				
Safety helmets				
Anchoring of safety belt to the life line rope				
ENVIRONMENT				
Lubricant waste/engine oils properly dispose.				
Waste from Canteen, offices, sanitation etc. disposed properly.				
Disposal of surplus earth, stripping materials, expired batteries, oily rags and combustible materials done properly.				
HEALTH CHECKS				
Hygienic conditions at labor camps O.K.				
Availability of first-aid facilities				
Proper sanitation at site, office & labor camps.				
Arrangement of medical facilities.				
Measures for dealing with illness.				
Availability of potable drinking water for workmen & staff.				
Provision of crèches for children.				

Signature of Subcontractor Site In-charge:

Date:

**POWER SECTOR****Format for Inspection of Illumination / Lux Levels**

FORMAT NO: HSEP:14-F21

REV NO.: 00

PAGE NO. 01 OF 1

Name of Site :

Name of Sub-Contractor :

Inspected by :

Date of Inspection :

Details of Lux Meter Used for Illumination Checking

Serial Number

Last inspection Date

Inspection Due Date

S. No	Location	Applicable Lux Value	Measured Lux Value	Comments
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				

Any other checks:

Remarks:

Name & Sign. Of Subcontractor HSE Officer

**POWER SECTOR****Format for Incident Reporting**

FORMAT NO: HSEP:14-F22

REV NO.: 00

PAGE NO. 01 OF 2

Type of incident: Fatal/Major//Fire/Property damage (Tick what is applicable)

1	Name Of Site		3	Activity Area	
2	Scope Of Work		4	Name Of Contractor	
			5	NAME & DESIGNATION OF BHEL ACTIVITY I/C	
6	Date & Time Of Accident		7	Date Resumed	
8	No. Of Work-Days Lost by Victim (If Duty Not Resumed, Give Estimated Figure)				
9	No. Of Man-hours Lost By Others				
10	Personal Details Of Injured and/or Details Of Materials/Equipment/ Property Damaged				
Name			Name Of Material / Equipment / Property		
Period Of Employment					
Age	Yrs.	Sex	Male/Female	Estimated Cost	Actual Cost
Marital Status		Single/ Married			
Occupation		Nature Of Damage			
Part Of Body Injured					
Nature Of Injury					
Agency (Object / Equipment / Substance) Most Responsible For Causing Accident / Injury / Damage					
12	Person (Name & Designation) With Most Control Over Agency (Object / Equipment / Substance) Causing Accident Injury / Damage				
13	Describe Clearly How the Accident Occurred (Use Additional Sheet, If Required)				

**POWER SECTOR****Format for Incident Reporting**

FORMAT NO: HSEP:14-F22

REV NO.: 00

PAGE NO. 02 OF 2

Analysis

14	What Acts and/or Conditions Contributed Most Directly to This Accident	
15	What Are the Basic Reason for The Existence of These Acts and/or Condition?	
16	What Corrective Actions Have Been Taken to Prevent Accident Recurrence?	
	Date:	Signature Of Site HSE Coordinator
17	Comments of Head/Sox	
	Date:	Signature Of Head/SOX



POWER SECTOR

Format for Incident Recording

FORMAT NO: HSEP:14-F23
REV NO.: 00
PAGE NO. 01 OF 1

[illegible]

SECTION-B

Special Requirements

(Applicable to this Contract Only)



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 00

Date: 25.04.19

Page 1 of 162

1. Establishment of Common Facilities for whole Project – cost to be borne in full by subcontractor.

Table 1.1

S. No.	Item	Details as per Clause No. of this Section	Applicable / Not Applicable with Remarks	Package
1	Construction of Medical Centre	a	Applicable	Civil
2	Construction of Worker Training Centre (A part of safety park)	b	Applicable	Civil
3	Construction of Vertigo Test Structure (A part of safety park)	c	Applicable	Civil
4	Deployment of Specialists	d	Applicable	By concerned agencies
5	HSE Equipment	e	Applicable	By concerned agencies
6	HSE measurement devices	f	Applicable	By concerned agencies
7	Urinals in under-construction structures	g	Applicable	By concerned agencies
8	Safety Park	h	Applicable	Civil

a. MEDICAL CENTRE

- i. A medical center shall be setup at site with basic facilities for handling medical emergencies
- ii. Deployment of Medical Professional:
 1. **A qualified medical professional shall be deployed at site at all times.**
 2. **When total employee & worker strength at site crosses 500, medical professional with MBBS Degree from recognized institute shall necessarily be deployed**
- iii. Ambulance shall be deployed along with a trained driver and accessories as per Schedule V of BOCW Central Rules, 1998. Ambulance shall be utilized exclusively for transporting the accident victim. Ambulance drivers shall be regularly trained in First Aid.
- iv. Non deployment of Ambulance and First Aider as above shall invite a penalty of Rs. 30000 pm and Rs10000 PM respectively
- v. Medical waste shall be disposed as per prevailing legislation (Bio-Medical Waste – Management and Handling Rules, 1998).
- vi. Above are bare minimum requirements. Any legal requirements over and above these specifications shall supersede the above requirements



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 00

Date: 25.04.19

Page 2 of 162

b. WORKER TRAINING CENTRE

- i. Indoor Worker Training Center to be developed at site with seating capacity of at least 50 trainees
- ii. Projector with following minimum specifications:

Native Resolution	XGA, 1024x768
Brightness (ANSI lumens)	3300
Contrast Ratio	13000:1
Display Color	30 Bits
Aspect Ratio	4:3

- iii. A Laptop or Desktop PC with following minimum specifications:

Processor	Intel Celeron Dual Core
Memory (RAM)	2 GB
Graphics Card	2GB Video Memory
Hard Disk Capacity	60 GB
Monitor Size	14 inches
Keyboard	
Mouse	

- iv. Stereo speakers with minimum 50W RMS sound output
- v. PA system for Addressing Workers
- vi. Seating arrangement

c. Development of Vertigo Test Structure:

Vertigo test Structure to be developed as per **Annexure 04**

d. Specialists:

Following specialists shall be deployed by the subcontractor, who shall cater to whole project as per BHEL requirements / instructions

- I. **Qualified T&P Inspector:** subcontractor shall engage one qualified T&P inspector having undergone a certification course in the discipline.
- II. **Qualified Scaffolding Erector and Inspector:** Subcontractor shall deploy one qualified Scaffolding Supervisor and Inspector having undergone a certification course in the discipline



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 00

Date: 25.04.19

Page 3 of 162

- e. **Tools & Equipment:** Following equipment conforming to relevant IS Codes for the job shall be ensured by subcontractor:

S. No.	Item
1	Lifelines
2	Retractable Fall Arrestors
3	Safety Nets (10m X 5m)
4	Sky Climbers
5	Fire Blanket
6	Honey Bee Removal Suit & Kit
7	Flashback Arrestors
8	Barricading Tape
9	Binoculars
10	Walkie-Talkies
11	LOTO kit
12	24-Volt light
13	Sand Buckets
14	Hard barricading planks
15	Standby Fire kits

S. No.	Item	Type of Job / Purpose	Remarks
1	Lifelines (Steel Rope) and posts	Height work	
2	Retractable Fall Arrestors	Height Work	
3	Safety Nets (for fall protection; railings also to be covered)	Height Work	
4	Sky Climbers	Height Work	
5	Fire Blanket, Spark/ slag collector	Hot Work	
6	Honey Bee Removal Suit & Kit	General	
7	Flashback Arrestors	Hot work	
8	Barricading –Hard (Scaffolding Pipes & Clamps or fabricated using structural/round	Height Work, Excavation, General Barricading	
9	Binoculars	HSE Inspection	
10	Walkie-Talkies	Lifting	
11	LOTO kit	Working on charged line	
12	24-Volt light	Confined Space/ temp work	
13	Sand and Water Buckets	Hot work/Electrical work	
15	Standby Fire kits Fire extinguisher stands	Hot work/Electrical work	



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 00

Date: 25.04.19

Page 4 of 162

Above equipment are bare minimum to be essentially maintained at all times. Additional numbers to be deployed as and when required in order to ensure fulfillment of all Safety requirements

f. HSE Measurement Equipment & Tools

S. No	Device
1	ELCB Tester
2	Multi meter (Light cables)
3	Earth Resistance Meter
4	Lux Meter
5	Decibel Meter
6	Anemometer
7	Breath Analyzer (Alcohol)
8	Multi-gas analyzer
9	Gas leakage detector / alarm
10	Gas monitor (confined space)
11	Radiation meter & Badges
12	Blood pressure monitor
13	Fire detectors
14	Dust Particle Detector

g. Urinals in Under-construction structures:

Urinals for in under-construction structures for easy access eg. In case of Boiler elevations etc.

2. Shared Facilities – where part of operating cost is borne by subcontractor in proportion to contract value

The subcontractor shall bear running expenses of above facilities on a 'proportional to contract value sharing basis as finalized by BHEL.

S. No.	Facility
1.	Operation of Ambulance, Nurses, Medical Consumables
2.	Construction, Maintenance & Upkeep of Latrines and Urinals in Common spaces
3.	Drinking Water Provision in Common Spaces
4.	Dust Control / Water Sprinkling, Pest Control, Fumigation at Site



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 00

Date: 25.04.19

Page 5 of 162

LIST OF REFERENCES

S. No	Code Name	Title
1	IS: 818-1888 (Reaffirmed 2003)	Code of Practice for Safety and Health requirements in Electric and Gas Welding and Cutting operations.
2	IS: 1179-1967 (Reaffirmed 2003)	Specification for Equipment for Eye & Face protection during welding.
3	IS: 1989 (Part 2):1986 (Reaffirmed 1997)	Specification for Leather Safety Boots & Shoes
4	IS:2925 – 1984 (Reaffirmed 2010)	Specification for Industrial Safety Helmets
5	IS:3521: 1999 (Reaffirmed 2002)	Industrial Safety Belts & Harnesses-Specification
6	IS:3646(Part II) – 1966(Reaffirmed 2003)	Code of Practice for Interior Illumination
7	IS:3696 (Part I) – 1987 (Reaffirmed 2002)	Safety Code for Scaffolds and Ladders
8	IS: 3696(Part 2) : 1991 (Reaffirmed 2002)	Scaffolds and Ladders-Code of Safety
9	IS: 3764:1992	Excavation Work – Code of Safety
10	IS:3786 – 1983 (Reaffirmed 2002)	Method for Computation of Frequency and Severity Rates for Industrial Injuries and Classification of Industrial Accidents
11	IS.4014.2.1967	Steel tubular Scaffolding
12	IS:4770: 1991 (Reaffirmed 2006)	Rubber Gloves Specification (Electricals Purposes)
13	IS:4912: 1978 (Reaffirmed 2002)	Safety Requirements for Floor and Wall Openings, Railings and Toe Boards
14	IS: 5557 – 1969	Industrial and Safety rubber knee boots.
15	IS: 5983 – 1980 (Reaffirmed 2002)	Specification for Eye-Protectors
16	IS:6519 – 1971 (Reaffirmed 1997)	Code of Practice for Selection, Care and Repair of Safety Footwear
17	IS.6549.1972	Glossary of terms used for Lifting tackles
18	IS:6994(Part I)-1973 (Re affirmed 1996)	Specification for Industrial Safety Gloves Leather and Cotton Gloves
19	IS.7215.1974	Steel Structure Fabrication
20	IS.7969.1975	Handling and storage of building material



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER
Rev.: 00

Date: 25.04.19

Page 6 of 162

21	IS:8519 – 1977 (Reaffirmed 1983)	Guide for Selection of Industrial Safety Equipment for Body Protection.
22	IS:8520 – 1977 (Reaffirmed 2002)	Guide for Selection of Industrial Safety Equipment for Eye, Face and Ear Protection.
23	IS:9167:1979	Specification for Ear-Protectors
24	IS:9473:2002	Respiratory Protective Devices-Filtering Half Masks to protect against Particles-Specification.
25	IS: 9944:1992 (Reaffirmed 2003)	Natural and Man-made Fiber Rope Slings- Recommendations on Safe working loads.
26	IS 11006 : 2011	Flash Back(Flame) Arrestor Specification
27	IS: 11226 – 1985	Leather Safety footwear having direct molding sole.
28	IS:11057 – 1884 (Reaffirmed 2001)	Specification for Industrial Safety Nets
29	IS: 12254:1993 (Reaffirmed 2002)	Polyvinyl Chloride (PVC) Industrial Boots Specification
30	IS:13367(Part 1):1992 (Reaffirmed 20030)	Safe Use of Cranes-Code of Practice
31	IS: 14166:1994 (Reaffirmed 2002)	Respiratory Protective Devices-Full Face Masks Specification
32	IS:14746: 1999 (Reaffirmed 2003)	Respiratory Protective Devices-Half Masks and Quarter Masks - Specification
33	IS: 15397 :2003 (Reaffirmed 2008)	Portable Extinguisher Mechanical Foam Type(Stored Pressure)-Specification
34	IS: 19011:2002	Guidelines for Quality and/or Environmental Management Systems Auditing

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)	Doc. No.: HSEP:14 Rev.: 01 Date: Page 1 of 162

As per Contract Labor (Regulation & Abolition Act), Central Rules, 1971,

- (1) The first-aid box shall be distinctively marked with a Red Cross on a white background and shall contain the following items, namely:

(a) For establishments in which the number of contract laborers employed does not exceed fifty, each first aid box shall contain the following equipment:

(i)	6 small sterilized dressings
(ii)	3 medium size sterilized dressings
(iii)	3 large size sterilized dressings
(iv)	6 pieces of sterilized eye pads in separate sealed packets.
(v)	6 roller bandages 10 cm wide.
(vi)	6 roller bandages 5 cm wide.
(vii)	One tourniquet
(viii)	A supply of suitable splints
(ix)	Three packets of safety pins.
(x)	Kidney tray.
(xi)	3 large sterilized burn dressings.
(xii)	1 (30ml) bottle containing a two percent alcoholic solution of iodine
(xiii)	1 (30 ml) bottle containing Sal volatile having the dose and mode of administration indicated on the label
(xiv)	1 snake bite lancet
(xv)	1 (30gms) bottle of potassium permanganate crystals.
(xvi)	1 pair scissors
(xvii)	1 copy of the First-Aid leaflet issued by the Director General, Factory Advice Service and Labor Institutes, Government of India.
(xviii)	A bottle containing 100 tablets (each of 5 grains) of aspirin
(xix)	Ointment for burns
(xx)	A bottle of suitable surgical anti-septic solution



HSEP:14 - ANNEXURE 03

Page 2 of 2

Details and Contents of First Aid Box

(b) For establishment in which the number of contract laborers exceeds fifty each first-aid box shall contain the following equipment:

(i)	12 small sterilized dressings
(ii)	6 medium size sterilized dressings
(iii)	6 large size sterilized dressings.
(iv)	6 large size sterilized burn dressings
(v)	6 (15 grams) packets sterilized cotton wool
(vi)	12 pieces of sterilized eye pads in separate sealed packets.
(vii)	12 roller bandages 10 cm wide.
(viii)	12 roller bandages 5 cm wide.
(ix)	One tourniquet.
(x)	A supply of suitable splints.
(xi)	Three packets of safety pins.
(xii)	Kidney tray.
(xiii)	Sufficient number of eye washes bottles filled with distilled water or suitable liquid clearly indicated by a distinctive sign which shall be visible at all times.
(xiv)	4 per cent Xylocaine eye drops, and boric acid eye drops and soda by carbonate eye drops.
(xv)	1 (60ml) bottle containing a two percent alcoholic solution of iodine
(xvi)	One (two hundred ml) bottle of mercurochrome (2 per cent) solution in water.
(xvii)	1 (120ml) bottle containing Sal volatile having the dose and mode of administration indicated on the label.
(xviii)	1 roll of adhesive plaster (6 cmX1 meter)
(xix)	2 rolls of adhesive plaster (2 cmX1 meter)
(xx)	A snake bite lancet.
(xxi)	1 (30 grams) bottle of potassium permanganate crystals.
(xxii)	1 pair scissors
(xxiii)	1 copy of the First-Aid leaflet issued by the Director-General, Factory Advice service and labor Institutes, Government of India.
(xxiv)	a bottle containing 100 tablets (each of 5 grains) of aspirin
(xxv)	Ointment for burns
(xxvi)	A bottle of a suitable surgical anti septic solution.

(2) Adequate arrangement shall be made for immediate recoupment of the equipment when necessary.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)

Doc. No.: HSEP:14


Rev.: 01

Date:

Page 1 of 162

Table 1

S. No.	Topic
1	Vertigo / Height working Test Structure Layout
2, 3	Structure Layout Sketch
3	Actual Photo of a typical structure
4	Bill of Materials
5	Guidelines for Conducting the Test

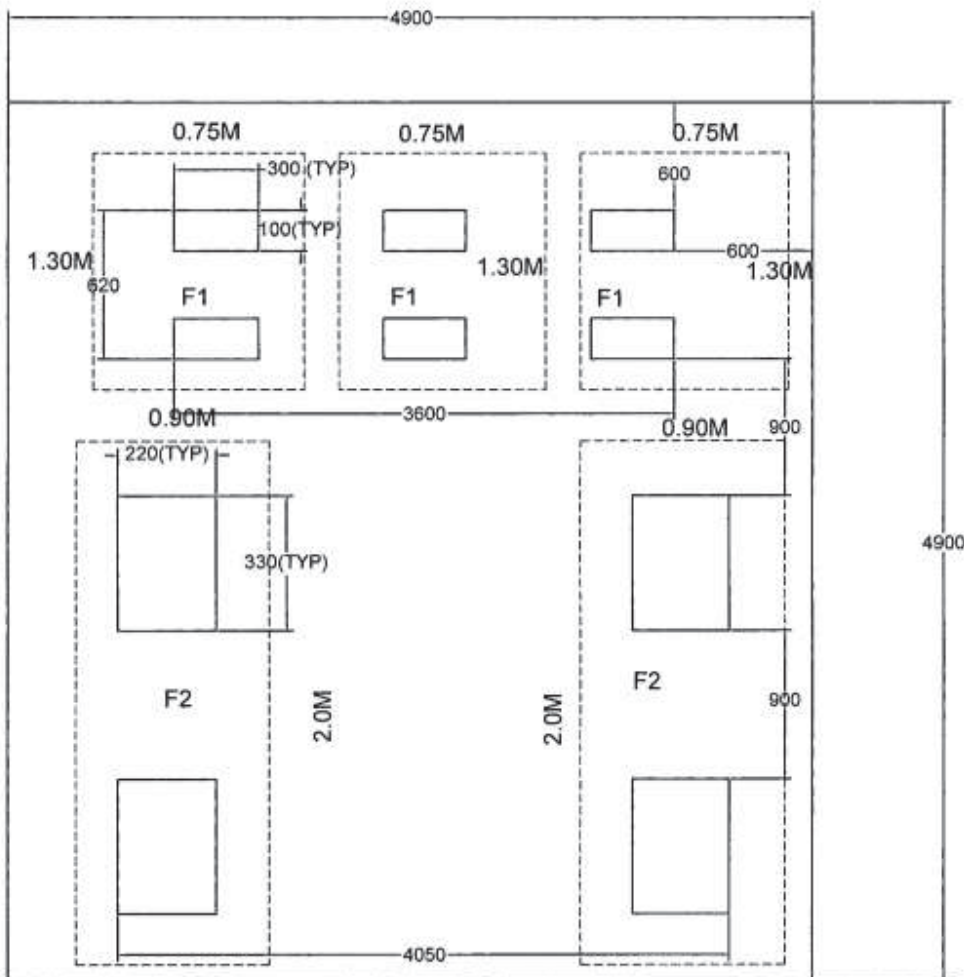


Note:

- All dimensions are in mm
- Drawing is not to scale
- Inside boundary area to be filled with sand to level with road (external)
- Details of F1 and F2 are shown below

Figure 1: Vertigo / Height Work Test Structure Layout



Vertigo Test Structure Specifications

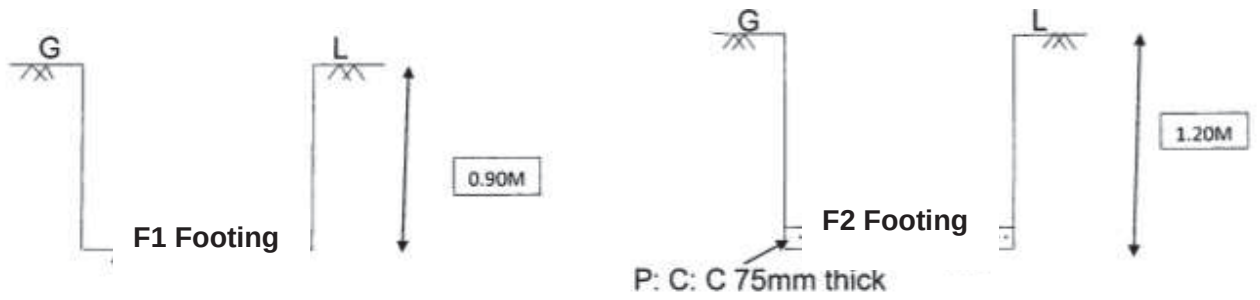

Note:

- Concrete Grade is M15
- Drawing is not to scale
- TOC is at Road Level
- G L refers to Ground Level

Figure 2

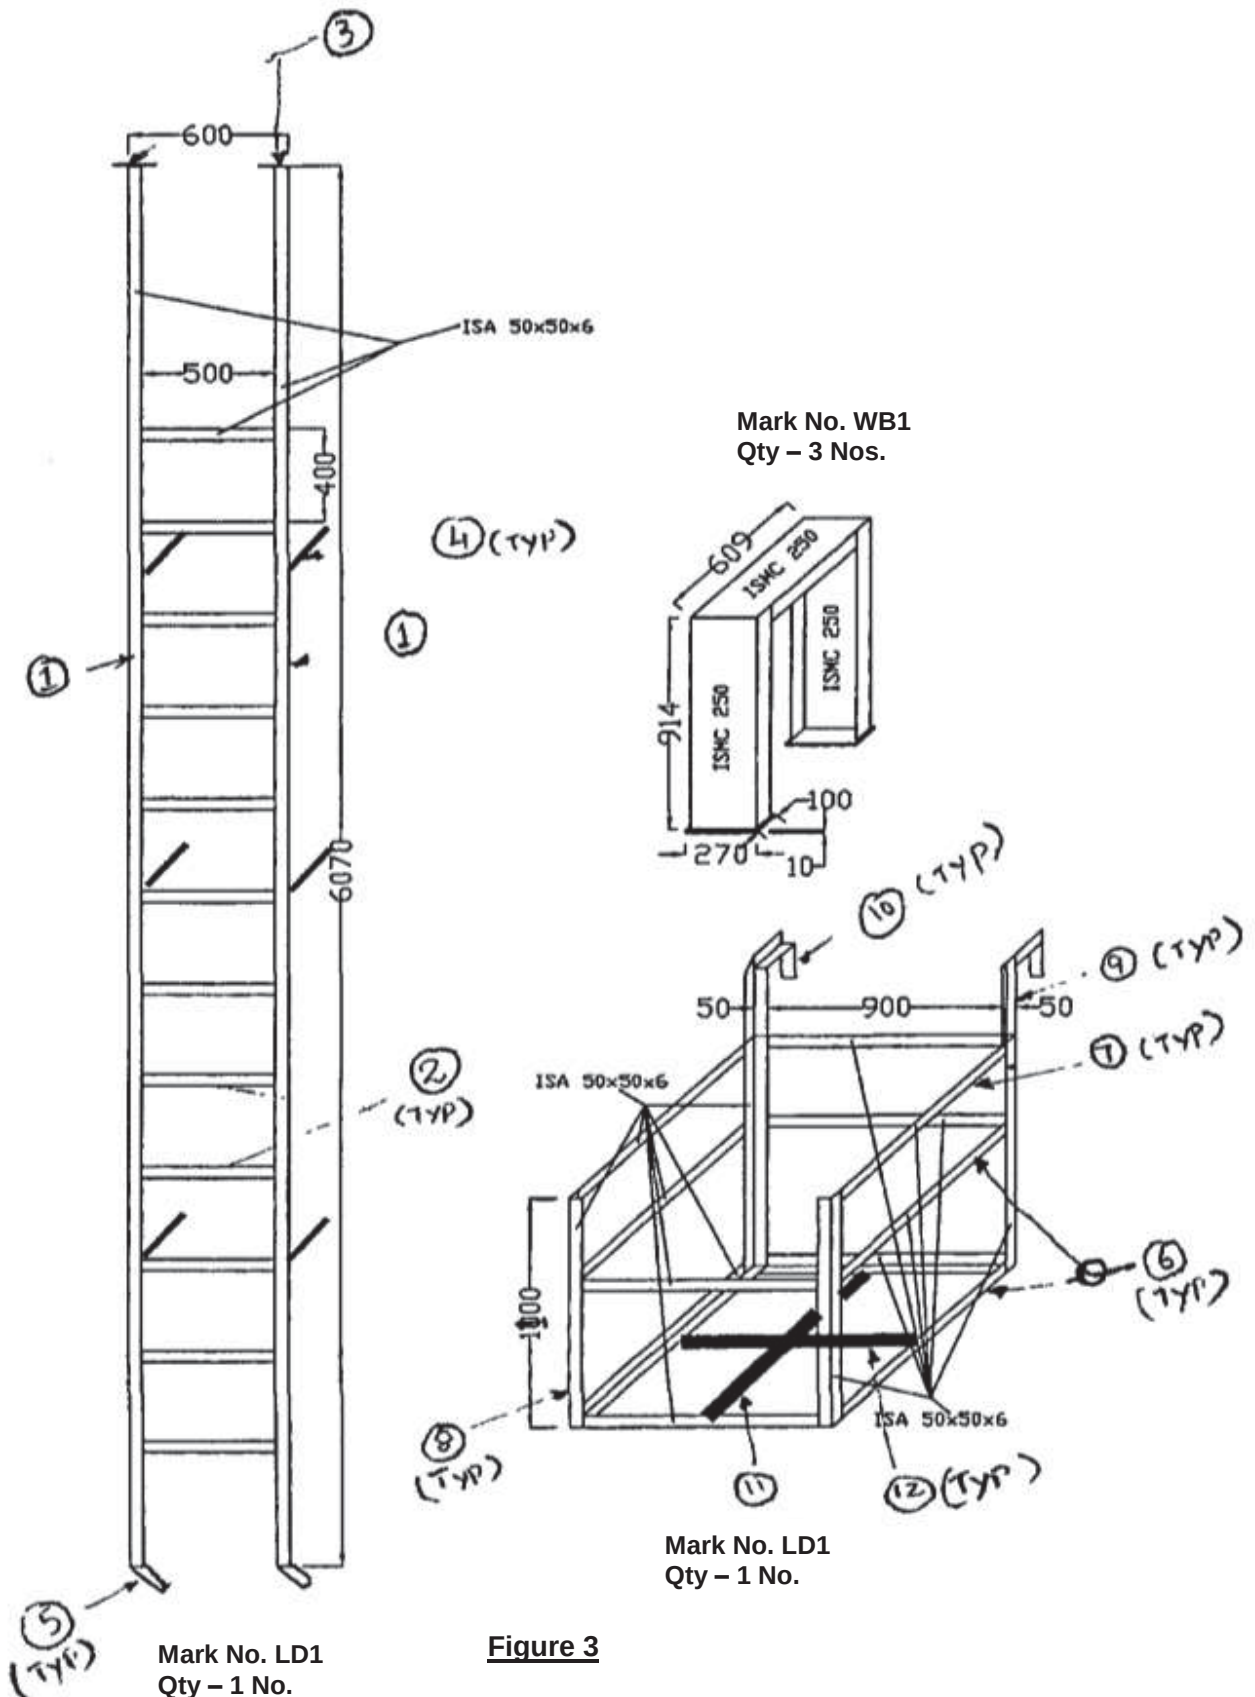


Figure 3

Figure 4

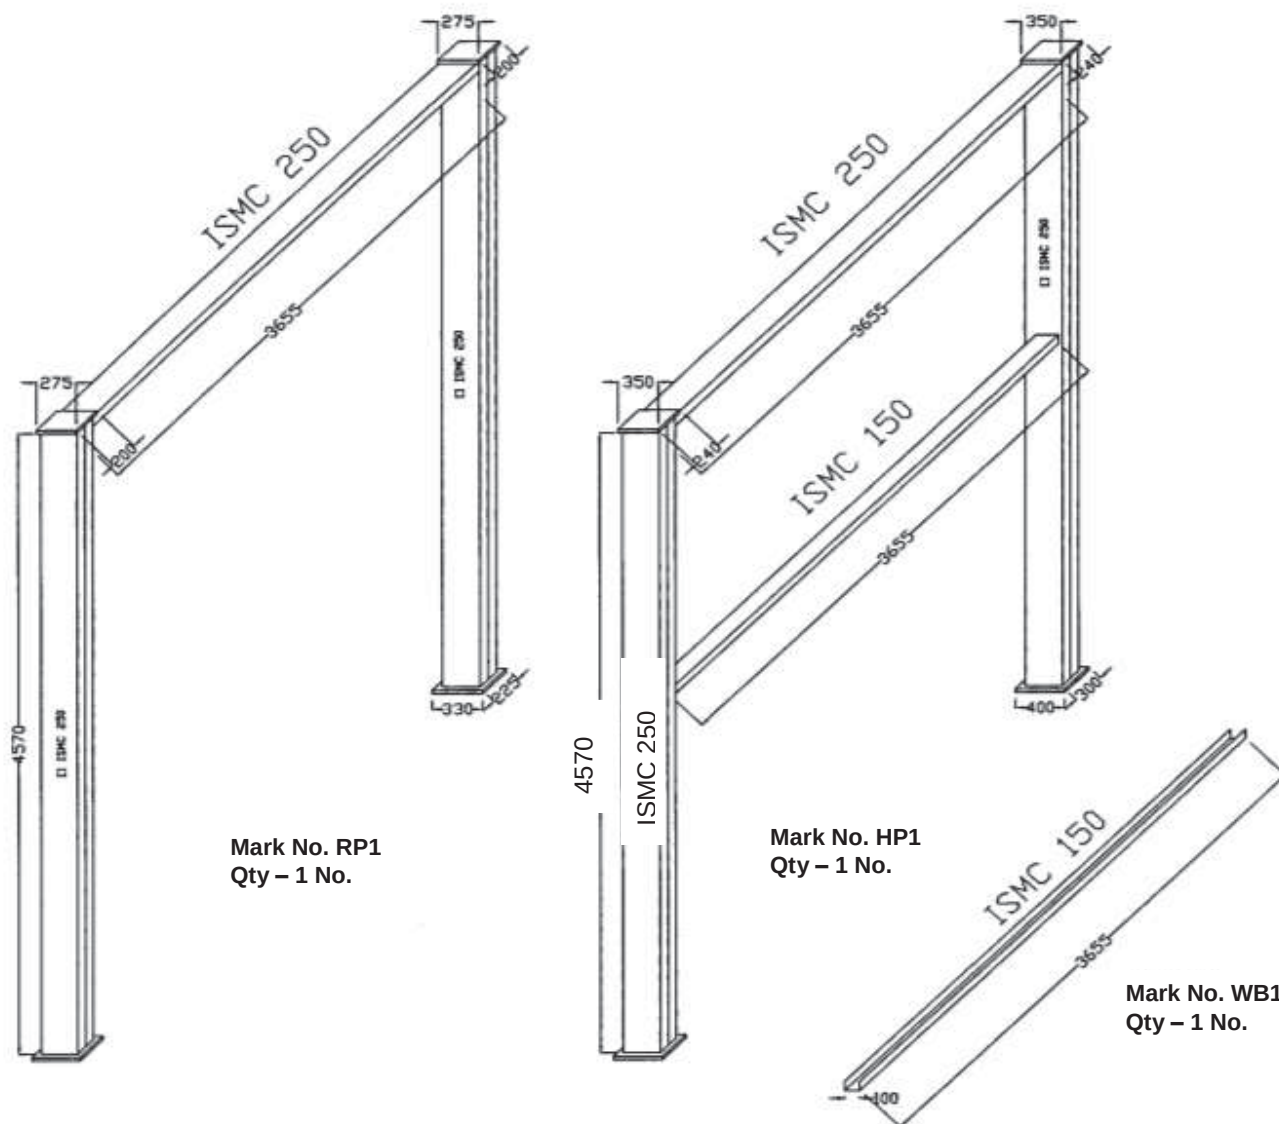




Table 2: BOM FOR HEIGHT WORK INDUCTION TRAINING MODULE

Sl. No.	Description	Width (mm)	Length (mm)	Qty (No's)	Unit Wt (Kgs)	Total Wt. (Kgs)
MKD NO. WB1						
1	ISMC250		609	3	34.20	62.483
2	ISMC250		914	6	34.20	187.553
3	ISMC100		3655	1	9.56	34.942
4	PL10	100	270	6	78.50	12.717
			Total Weight (Kgs)			297.695
MKD NO. RP1						
1	ISMC250		4570	4	34.20	625.176
2	ISMC250		3655	1	34.20	125.001
3	PL25	225	330	2	196.25	29.143
4	PL25	200	275	2	196.25	21.588
			Total Weight (Kgs)			800.908
MKD NO. HP1						
1	ISMC250		4570	4	34.20	625.176
2	ISMC250		3655	1	34.20	125.001
3	ISMC150		3655	1	16.80	61.404
4	PL25	300	400	2	196.25	47.100
5	PL25	240	350	2	196.25	32.970
			Total Weight (Kgs)			891.651
MKD NO. LD1						
1	ISA50X50X6		6070	2	4.50	54.630
2	ISA50X50X6		500	12	4.50	27.000
3	PL12	75	75	2	94.20	1.060
4	ISA50X50X6		300	6	4.50	8.100
5	ISA50X50X6		255	2	4.50	2.295
6	ISA50X50X6		1000	8	4.50	36.000
7	ISA50X50X6		910	3	4.50	12.285
8	ISA50X50X6		1100	4	4.50	19.800
9	ISA50X50X6		650	2	4.50	5.850
10	ISA50X50X6		350	2	4.50	3.150
11	PL8	75	900	1	62.80	4.239
12	PL8	75	410	2	62.80	3.862
			Weight (Kgs)			178.271
			Total Weight (Kgs)			2168.525



A. Test Procedure / Guidelines

Fear of height may be physiological or psychological. Therefore, to rule out any possibility of physiological factor, detailed medical check-up of workers is carried out before vertigo test. Medical check-up of workers includes the following:

history of past illnesses (like epilepsy, drug allergy, diabetics/ hypertension, unconsciousness etc.), general physical examination (like height, weight, BMI, build and nourishment etc.), measurement of pulse rate, Blood Pressure, respiratory rate.

After this check-up, those who are found suitable for height work by examining doctor, are allowed to undergo vertigo test.

During this health check-up, psychology of workers is also studied. If any worker finds it extremely difficult/ frightening to climb the monkey ladder & walk on the beam, during/after performing vertigo test or even before performing, then he is treated as disqualified.

As per standard, during vertigo test, worker is allowed to climb on a foundation through monkey ladder, walk on a beam, then steps down at the other end of beam, through monkey ladder. Height of the beam should be at least six feet from ground level. All necessary safety precautions are taken during this test. Worker has to wear full body harness with double lanyard. A horizontal lifeline is run parallel to the beam and worker has to put his lanyards into the lifeline. Additionally, a safety net is also put below the beam for rescue of the victim in case of a fall from beam.

Following activities are generally carried during testing:

1. Walking Bench Training:

- a. Person should walk over the channel. He should maintain balance & walk without much problem.
- b. If the person has problem to balances himself on repeated chances, he may be having flat foot or some other problem. So, he may not be fit for height work.

2. Rope Climb Training:

Person should be able to climb the rope up to the top channel for ensuring that in case of fall, a person hanging on the safety harness, will be able to safely climb back to the platform within minimum time period before the safety harness start breaking down under the load.

3. Height Work Training:

Person should walk freely on the middle channel while holding the top channel with the help of safety harness.

4. Ladder for Vertical fall arrestor Training:

Vertical fall arrestor rope is fixed from top to bottom of the ladder. It will ensure:

- Usage of vertical fall arrestor.
- Usage of two lanyards of a safety harness.
- Ensure 3-point contact on the ladder while climb.

5. Chair for work at height Training:

- Climb though vertical ladder with two lanyard ropes.
- Hooking of two lanyard ropes to life line. With this safe arrangement, he can walk to chair.
- Sits in the chair safely, comes out & walks back to the vertical ladder & come down from vertical ladder. After completion of vertigo test, blood pressure of worker is again measured. If it is not within acceptable limits for any worker, concerned worker is denied height pass.

Only those who pass the above training are fit for height work.

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)	Doc. No.: HSEP:14
		Rev.: 01
		Date:
		Page 7 of 162

<u>Safety Park Requirements</u>		
S.No	Training room(capacity 40 persons)	Qty.
1	Class room chair	25
2	Office Table	3
3	Rolling chair	3
4	Almirah	1
5	Visitor chair	10
6	Drawer	2
7	Single bed	1
8	Mattress	1
9	Projector	1
10	Projector screen	1
11	Sound speakers	1
12	Desktop Computer	3
13	Printer	1
14	White Board	1
15	Marker	5
16	Duster	1
17	Door Mat	9
18	Dustbin(Smaal + BIG)	7+1
19	Mannequin	1
20	Helmet	1
21	Face Shield	1
22	Safety Goggle	1
23	Welding sheild	1
24	Ear Muff	1
25	Ear Plug	1
26	Nose Mask	1
27	Breathing Apparatus	1
28	Hand Gloves(Cotton)	1
29	Hand Gloves for Electrician (Rubber)	1
30	Hand gloves Rubber	1
31	Hand Gloves Lather	1
32	Construction Safety Uniform(Boiler Suit)	1
33	Welding Apron	1
34	Safety Shoes	1
35	Leg Guard For Welder	1
36	Poster for Occupational Disease like Pneumoconosis,silicosis etc.	1
37	Gum Boot	1

38	Full Body Harness	1
39	8 MM Wire rope for life line. Length 20 Feet(FT).	1
40	Sfety Net for man & materials.Size 15 FT X 15FT.	1
41	MonkEy ladder 15 FT.	1
45	Fire Extingusher All types(DCP,CO2 & Foam)	1
46	Bed Sheet	1
47	Pillow	1
48	Curtain	12
49	curtain fittings	12
50	AC (1.5 TON)	3
51	AC (2 TON)	2
52	Rope pully.	1
53	PP Rope for pully 20 MTR.	
54	Ladder Clamps	6
55	Allumuniam ladder 6 MTR.	1
56	Carry Bag	
57	Scaffolding all Materilas for 5 Mtr. Height like.Sacffolding tubes,Sole plate,base plate,Right angle clamps,Swielclamps,beam clamps,Joint box/joint pin,toe guard/board,	



Health, Safety & Environment, Power Sector Headquarters

Bharat Heavy Electricals Limited

Regd. Office: BHEL House, Siri Fort, New Delhi – 110049, India

Website: www.bhel.com

TENDER NO: PSER:SCT:NKP-C1999:19

VOLUME -IE

FORMS & PROCEDURES

FOR

**BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF
3X660 MW NORTH KARANPURA STPP, JHARKHAND.**

BHARAT HEAVY ELECTRICALS LIMITED

(A GOVT. OF INDIA UNDERTAKING)

POWER SECTOR – EASTERN REGION

PLOT NO. – 9 / 1, DJ – BLOCK,

SECTOR – II, KARUNAMOYEE,

SALT LAKE CITY,

KOLKATA – 700091.

FORMS & PROCEDURES

INDEX

SN	Description	Form No	Remarks
1.0	Forms		
1.1	Offer forwarding Letter/Submission of Tender	F-1 (Rev 00)	
1.2	Declaration by Authorised Signatory	F-2 (Rev 00)	
1.3	No Deviation Certificate	F-3 (Rev 00)	
1.4	Declaration confirming knowledge about Site Conditions	F-4 (Rev 00)	
1.5	Declaration for relation in BHEL	F-5 (Rev 00)	
1.6	Non Disclosure Certificate	F-6 (Rev 00)	
1.7	Bank Account Details for E-Payment	F-7 (Rev 00)	
1.8	Form for seeking clarifications	F-8 (Rev 00)	
1.9	Capacity Evaluation of Bidder for current Tender	F-9 (Rev 00)	
1.10	Contract Agreement	F-10 (Rev 00)	
1.11	Bank Guarantee for Security Deposit	F-11 (Rev 00)	
1.12	Bank Guarantee for ~~Interest Bearing Refundable~~ Advance	F-12 (Rev 00)	
1.13	Extension of Validity of Bank Guarantee	F-13 (Rev 00)	
1.14	Monthly Plan & Review with Contractors	F-14 (Rev 00)	
1.15	Monthly Performance Evaluation of Contractor	F-15 (Rev 01)	Revised
1.16	~~Evaluation of Contractor Performance (Quarterly)~~	~~F-16 (Rev 00)~~	Deleted
1.17	Evaluation of Contractor Performance (Annual)	F-17 (Rev 01)	Under revision ##
1.18	Evaluation of Contractor Performance for the Contract (Overall)	F-18 (Rev 01)	Under revision ##

FORMS & PROCEDURES

SN	Description	Form No	Remarks
1.19	Milestone Completion Certificate	F-19 (Rev 00)	
1.20	Completion Certificate	F-20 (Rev 01)	Revised
1.21	Indemnity Bond	F-21 (Rev 00)	
1.22	Consortium Agreement	F-22 (Rev 00)	
1.23	Refund of Security Deposit	F-23 (Rev 00)	
1.24	Refund of Guarantee Money	F-24 (WAM-11)	
1.25	Power of Attorney for Submission of Tender/Signing Contract Agreement	F-25 (Rev 00)	
1.26	Analysis of Unit Rates Quoted	F-26 (Rev 00)	
1.27	RA Bill Format	WAM-6	
1.28	Final Bill Submission format with No Claim Certificate and No Demand Certificate	WAM-7	
1.29	PROFORMA FOR PERFORMANCE BANK GUARANTEE		
1.30	BANK GUARANTEE FOR SD CUM PBG BOND		
2.0	Procedures		
2.1	Procedure and Business Rules for Reverse Auction	As per Company Policy	
2.2	Integrity Pact	As per Company Policy	
3.0	Customer specific procedures		
3.1			

- BANK GUARANTEE FORMATS FOR "RELEASE OF AMOUNTS WITHED/ LIQUIDATED DAMAGES AMOUNT", "SUPPLY FREE ISSUE MATERIAL" & "EARNEST MONEY" IS ALSO GIVEN.

: will be released later

FORMS & PROCEDURES

Form No: F-01 (Rev 00)

OFFER FORWARDING LETTER / TENDER SUBMISSION LETTER (To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

Offer Reference No:.....

Date:.....

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : Submission of Offer against Tender Specification No:

I/We hereby offer to carry out the work detailed in the Tender Specification issued by Bharat Heavy Electricals Limited, Power Sector-....., in accordance with the terms and conditions thereof.

I/We have carefully perused the following listed documents connected with the above work and agree to abide by the same.

1. Amendments/Clarifications/Corrigenda/Errata/etc issued in respect of the Tender documents by BHEL
2. Notice Inviting Tender (NIT)
3. Price Bid
4. Technical Conditions of Contract
5. Special Conditions of Contract
6. General Conditions of Contract
7. Forms and Procedures

Should our Offer be accepted by BHEL for Award, I/we further agree to furnish 'Security Deposit' for the work as provided for in the Tender Conditions within the stipulated time as may be indicated by BHEL.

I/We further agree to execute all the works referred to in the said Tender documents upon the terms and conditions contained or referred to therein and as detailed in the appendices annexed thereto.

I/We have deposited/depositing herewith the requisite Earnest Money Deposit (EMD) as per details furnished in the Check List.

Authorised Representative of Bidder

Signature :

Name :

Address :

Place:

Date:

FORMS & PROCEDURES

Form No: F-02 (Rev 00)

DECLARATION BY AUTHORISED SIGNATORY OF BIDDER

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration by Authorised Signatory**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

I/We, hereby certify that all the information and data furnished by me with regard to the above Tender Specification are true and complete to the best of my knowledge. I have gone through the specifications, conditions, stipulations and all other pertinent issues till date, and agree to comply with the requirements and Intent of the specification.

I further certify that I am authorised to represent on behalf of my Company/Firm for the above mentioned tender and a valid Power of Attorney to this effect is also enclosed.

Yours faithfully,

(Signature, Date & Seal of Authorized
Signatory of the Bidder)

Date:

Enclosed : Power of Attorney

FORMS & PROCEDURES

Form No: F-03 (Rev 00)

NO DEVIATION CERTIFICATE

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **No Deviation Certificate**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

We hereby confirm that we have not changed/ modified/materially altered any of the tender documents as downloaded from the website/ issued by BHEL and in case of such observance at any stage, it shall be treated as null and void.

We also hereby confirm that we have neither set any Terms and Conditions and nor have we taken any deviation from the Tender conditions together with other references applicable for the above referred NIT/Tender Specification.

We further confirm our unqualified acceptance to all Terms and Conditions, unqualified compliance to Tender Conditions, Integrity Pact (if applicable) and acceptance to Reverse Auctioning process.

We confirm to have submitted offer in accordance with tender instructions and as per aforesaid references.

Thanking you,

Yours faithfully,

(Signature, date & seal of authorized
representative of the bidder)

FORMS & PROCEDURES

Form No: F-04 (Rev 00)

DECLARATION CONFIRMING KNOWLEDGE ABOUT SITE CONDITIONS

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration confirming knowledge about Site conditions**

Ref : 1) NIT/Tender Specification No:,

2) All other pertinent issues till date

I/We, _____ hereby declare and confirm that we have visited the Project Site as referred in BHEL Tender Specifications and acquired full knowledge and information about the Site conditions including Wage structure, Industrial Climate, the Law & Order and other conditions prevalent at and around the Site. We further confirm that the above information is true and correct and we shall not raise any claim of any nature due to lack of knowledge of Site conditions.

I/We, hereby offer to carry out work as detailed in above mentioned Tender Specification, in accordance with Terms & Conditions thereof.

Yours faithfully,

(Signature, Date & Seal of Authorized
Representative of the Bidder)

Date :

Place:

FORMS & PROCEDURES

Form No: F-05 (Rev 00)

DECLARATION FOR RELATION IN BHEL

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder failing which the offer of Bidder is liable to be summarily rejected)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration for relation in BHEL**

Ref : 1) NIT/Tender Specification No:,

I/We hereby submit the following information pertaining to relation/relatives of Proprietor/Partner(s)/Director(s) employed in BHEL

Tick(✓) any one as applicable:

1. The Proprietor, Partner(s), Director(s) of our Company/Firm DO NOT have any relation or relatives employed in BHEL

OR

2. The Proprietor, Partner(s), or Director(s) of our Company/Firm HAVE relation/relatives employed in BHEL and their particulars are as below:

(i)

(ii)

Signature of the Authorised Signatory

Note:

1. Attach separate sheet, if necessary.
2. If BHEL Management comes to know at a later date that the information furnished by the Bidder is false, BHEL reserves the right to take suitable action against the Bidder/Contractor.

FORMS & PROCEDURES

Form No: F-06 (Rev 00)

NON DISCLOSURE CERTIFICATE

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

NON DISCLOSURE CERTIFICATE

I/We understand that BHEL PS __ is committed to Information Security Management System as per their Information Security Policy.

Hence, I/We M/s.....
who are submitting offer for providing services to BHEL PS __ against
Tender Specification No: _____,
hereby undertake to comply with the following in line with Information
Security Policy of BHEL PS __, _____

- To maintain confidentiality of documents & information which shall be used during the execution of the Contract.
- The documents & information shall not be revealed to or shared with third party which shall not be in the business interest of BHEL PS__.

(Signature, date & seal of Authorized
Signatory of the bidder)

Date:

FORMS & PROCEDURES

Form No: F-07 (Rev 00)

BANK ACCOUNT DETAILS FOR E-PAYMENT

(To be given on Letter head of the Company /Firm of Bidder, and **ENDORSED (SIGNED & STAMPED) BY THE BANK** to enable BHEL release payments through Electronic Fund Transfer (EFT/RTGS))

1. Beneficiary Name :
2. Beneficiary Account No. :
3. Bank Name & Branch :
4. City/Place :
5. 9 digit MICR Code of Bank Branch :
6. IFSC Code of Bank Branch :
7. Beneficiary E-mail ID :
(for payment confirmation)

NOTE: In case Bank endorsed certificate regarding above has already been submitted earlier, Kindly submit photocopy of the same

FORMS & PROCEDURES

Form No: F-08 (Rev 00)

FORMAT FOR SEEKING CLARIFICATION

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Request for Clarification**

Ref : 1) NIT/Tender Specification No:,

2) All other pertinent issues till date

Sl no	Reference clause of Tender Document	Existing provision	Bidder's query	BHEL's clarification
1				
2				
3				

Yours faithfully,

(Signature, date & seal of Authorized
Representative of the Bidder)

FORMS & PROCEDURES

FORMS & PROCEDURES

Form No: F-09 (Rev 00)

CAPACITY EVALUATION OF BIDDERS FOR CURRENT TENDER

SL NO.	DESCRIPTION OF WORK (Similar to Tendered Scope)	WORK ORDER REF & DATE	CONTRACT VALUE (Rs. LACS)	CUSTOMER NAME & ADDRESS	CURRENT STATUS OF THE JOB ALONG WITH LATEST MILE STONE COMPLETED	%AGE OF WORK COMPLETED	VALUE OF BALANCE WORK (Rs. Lacs)
1							
2							
3							
4							
5							

NOTES:

1. BIDDERS ARE REQUIRED TO FURNISH ALL THE JOBS OF SIMILAR NATURE WHICH THEY ARE EXECUTING (IN PROGRESS) AT THE TIME OF SUBMISSION OF TENDER, AS PER ABOVE FORMAT.

2. BIDDERS HEREBY UNDERTAKE THAT THEY HAVE FURNISHED THE DETAILS SOUGHT AS PER POINT NO. 1 IN TOTALITY AND THAT THE DETAILS FURNISHED IS COMPLETE IN ALL RESPECT.

3. BHEL WILL TAKE APPROPRIATE ACTION AS DEEMED FIT , IN CASE, IT IS FOUND AT A LATER DATE THAT THE CONTRACTOR HAD SUPPRESSED THE FACTS AND HAVE NOT FURNISHED THE CORRECT & COMPLETE INFORMATIONS.

Signature

DATE :

PLACE:

Name, Designation & Seal of Bidder

FORMS & PROCEDURES

CONTRACT AGREEMENT

Form No: F-10 (Rev 00)

BHARAT HEAVY ELECTRICALS LIMITED
(A Government of India Undertaking)
Power Sector – Region

CONTRACT AGREEMENT

AGREEMENT NO. _____

NAME OF WORK	
NAME OF THE CONTRACTOR WITH FULL ADDRESS	
VALUE OF WORK AWARDED	
LETTER OF INTENT NO.	
TIME ALLOTTED FOR COMPLETING THE WORK (DATE OF COMPLETION)	

SIGNATURE OF CONTRACTOR

(SIGNATURE OF BHEL OFFICER)

FORMS & PROCEDURES

CONTRACT AGREEMENT

THIS AGREEMENT MADE THIS _____ DAY OF _____ between BHARAT HEAVY ELECTRICALS LIMITED (A Government of India Enterprise) a Company incorporated under the Companies Act, 1956, having its Registered Office at BHEL House, Siri Fort New Delhi- 110049 (herein after called BHEL) of the ONE PART.

AND

M/S _____
_____ (hereinafter called the 'Contractor') of the SECOND PART.

WHEREAS M/s -----state that they have acquired and possess extensive experience in the field of -----

And Whereas in response to an Invitation to Tender No. ----- issued by BHEL for execution of ----- the contractor submitted their offer No.- -----dated -----And whereas BHEL has accepted the offer of the Contractor on terms and conditions specified in the Letter of Intent No.----- dated -----read with the references cited therein.

THIS AGREEMENT WITNESSES AND it is hereby agreed by and between the parties as follows:

1. That the contractor shall execute the work of -----and more particularly described in Tender Specification No -----including Drawings and Specifications (hereinafter called the said works) in accordance with and subject to terms and conditions contained in these presents, instructions to Tenderers, General Conditions of Contract, Special Conditions, Annexures, Letter of Intent dated -----and such other instructions, Drawings, Specifications given to him from time to time by BHEL.
2. The Contractor is required to furnish to BHEL Security deposit in the form of cash/ approved securities/ Bank Guarantee valid upto ----- for a sum of Rs.----- towards satisfactory performance and completion of the Contract.
3. The Contractor has furnished a Bank Guarantee bearing no.-----dated -----for a sum of Rs.-----executed by ----- in favour of BHEL towards Security Deposit valid upto -----

OR

The Contractor has furnished to BHEL an initial Security Deposit of Rs.-----in the form of cash / approved Securities/ B.G No.----- dated ----- for Rs.-----executed by ----- in favour of BHEL valid upto ----- and has agreed for recovery of the balance security deposit by BHEL @ 10% of the value of work done from each running bill till the entire Security Deposit is recovered.

OR

FORMS & PROCEDURES

The contractor has furnished to BHEL an initial Security Deposit of Rs.----- (Rs.----- vide Bank draft No.----- dated ----- and by adjusting EMD of Rs.----- submitted vide Bank draft No.----- dt.-----) and has agreed for recovery of balance Security Deposit by BHEL @ 10% of the value of work done from each running bill till the entire security deposit is recovered.

4. The Contractor hereby agrees to extend the validity of the Bank Guarantee for such further period or periods as may be required by BHEL and if the Contractor fails to obtain such extension(s) from the Bank, the Contractor, shall pay forthwith or accept recovery of Rs.----- from the bills in one installment and the contractor further agrees that failure to extend the validity of the Bank Guarantee or failure to pay the aforesaid amount in the manner specified above shall constitute breach of contract. In addition to above, BHEL shall be entitled to take such action as deemed fit and proper for recovering the said sum of Rs.-----

OR

In case the contractor furnishes the bank guarantee at a later date the contractor hereby agrees to extend the validity of bank guarantee for such further period or periods as may be required by BHEL and if the contractor fails to obtain such extension(s) from the bank, the contractor shall pay forthwith or accept recovery of the amount of bank guarantee given in lieu of security deposit from the bills in one installment and the contractor further agrees that failure to extend the validity of bank guarantee or failure to pay the aforesaid amount in the manner specified above shall constitute breach of contract. In addition to above, BHEL shall be entitled to take such action as deemed fit and proper for recovering the said sum.

5. That in consideration of the payments to be made to the Contractor by BHEL in accordance with this Agreement the Contractor hereby covenants and undertakes with BHEL that they shall execute, construct, complete the works in conformity, in all respects, with the terms and conditions specified in this Agreement and the documents governing the same.
6. That the Contractor shall be deemed to have carefully examined this Agreement and the documents governing the same and also to have satisfied himself as to the nature and character of the Works to be executed by him.
7. That the Contractor shall carry out and complete the execution of the said works to the entire satisfaction of the Engineer or such other officer authorised by BHEL, within the agreed time schedule, the time of completion being the essence of the Contract.
8. That BHEL shall, after proper scrutiny of the bills submitted by the Contractor, pay to him during the progress of the said works such sum as determined by BHEL in accordance with this Agreement.
9. That this Agreement shall be deemed to have come into force from ----- the date on which the letter of intent has been issued to the Contractor.

FORMS & PROCEDURES

10. That whenever under this contract or otherwise, any sum of money shall be recoverable from or payable by the Contractor, the same may be deducted in the manner as set out in the General Conditions of Contract or other conditions governing this Agreement.
11. That all charges on account of Octroi, Terminal and other taxes including sales tax or other duties on material obtained for execution of the said works shall be borne and paid by the Contractor.
12. That BHEL shall be entitled to deduct from the Contractor's running bills or otherwise Income Tax under Section 194 (C) of the Income Tax Act, 1961.
13. That BHEL shall be further entitled to recover from the running bills of the Contractor or otherwise such sum as may be determined by BHEL from time to time in respect of consumables supplied by BHEL, hire charges for tools and plants issued (Where applicable) and any other dues owed by the Contractor.
14. That it is hereby agreed by and between the parties that non-exercise, forbearance or omission of any of the powers conferred on BHEL and/or any of its authorities will not in any manner constitute waiver of the conditions hereto contained in these presents and the liability of the Contractor with respect to compensation payable to BHEL or Contractor's obligations shall remain unaffected.
15. It is clearly understood by and between the parties that in the event of any conflict between the Letter of Intent and other documents governing this Agreement, the provisions in the Letter of Intent shall prevail.

16. The following documents

1. Invitation to Tender No-----
and the documents specified therein.
2. Contractor's Offer No-----
dated-----.
3. _____
4. _____
5. _____
6. Letter of Intent No_____ dated_____.
7. _____

shall also form part of and govern this Agreement.

IN WITNESS HEREOF, the parties hereto have respectively set their signatures in the presence of

WITNESS

(CONT

RACTOR)

FORMS & PROCEDURES

1. (to be signed by a person holding
a valid Power of Attorney)

2.

WITNESS (For and on behalf of BHEL)

1.

2.

PROFORMA OF BANK GUARANTEE (in lieu of SECURITY DEPOSIT)

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having agreed to exempt (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ (hereinafter called the said Contractor which term includes supplier), from demand under the terms and conditions of the Contract reference No. _____² dated _____² valued at Rs. ² (Rupees -----)² for <Nature of the Work>³ (hereinafter called the said Contract) of Security Deposit for the due fulfilment by the said contractor of the terms and conditions contained in the said Contract, on production of a Bank Guarantee for Rs. _____⁴ (Rupees _____ only), we _____ (indicate the name and address of the Bank) having its Head Office at _____ (address of the head Office) (hereinafter referred to as the Bank) at the request of _____ [Name of Contractor(s)] do hereby undertake to pay to the Employer an amount not exceeding Rs. _____ in the event of any breach by the said Contractor(s) of any of the terms and conditions contained in the said Contract.

We, _____ (indicate the name of the Bank), do hereby undertake to pay the amounts due and payable under this guarantee without any demur, merely on a demand from the Employer. Any such demand made on the bank, shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor(s) in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this guarantee shall be a valid discharge of our liability for payment hereunder and the Contractor(s) shall have no claim against us for making such payment.

We, further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claim satisfied or discharged or till _____⁵ or till the office/Department/Division of Bharat Heavy Electricals Limited certifies that the terms and conditions of the said Contract have been fully and properly carried out by the said contractor(s) and also including the satisfactory performance of the equipment during guarantee period and accordingly discharges this guarantee. Unless a demand or claim under this guarantee is made on us in writing on or before the _____⁶, (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all the liability under this guarantee thereafter.

We, _____ (indicate the name of the Bank) _____ further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said contractor(s) from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said contractor(s) and to forbear or enforce any of the terms and conditions relating to the said Contract and we shall not be relieved from our liability by any reason of any such variation or extension being granted to the said contractor(s) or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said contractor(s) or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

This guarantee will not be discharged due to the change in the constitution of the Bank or the Contractor(s).

We,..... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before _____⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ (indicate the name of the Bank) _____ lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

Date _____ Day of _____
for _____ (indicate the name of the Bank) _____

(Signature of Authorised signatory)

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER .

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.
2. In Case of Bank Guarantees submitted by Foreign Vendors-
 - a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter-Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.

- b.2** In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
- b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
- b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

BANK GUARANTEE FOR ADVANCE

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ (hereinafter called "the Contractor" which expression shall include its successors and permitted assigns) a contract Ref No.....dated ²valued at Rs.....(Rupees -----) for <Nature of Work> ³(hereinafter called the 'Contract')

AND WHEREAS the Employer has agreed to advance to the Contractor, a sum of Rs..... (Rupees..... only), equivalent to _____% of the said value of the Contract (hereinafter called "the said Advance"), upon the condition, that the said Advance shall be secured by undertaking guarantee for Rs ----- (Rupees -----)⁴ from a Bank as hereinafter appearing.

We, ..., (hereinafter referred to as the Bank), having registered/Head office at and a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer without any demur, merely on your first demand any sum or sums upto a maximum amount but not exceeding Rs ----- (Rupees -----).

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Contractors/Supplier shall have no claim against us for making such payment.

We the Bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time on the request of the Employer for such period as may be desired by the Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms hereof. However, unless a demand or claim under this Guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this Guarantee.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank

We, ... Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Date.....

Place of Issue.....

¹ NAME OF VENDOR /CONTRACTOR / SUPPLIER

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.
2. In Case of Bank Guarantees submitted by Foreign Vendors-
 - a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2 **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3 The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4 The BG should clearly specify that the demand or other document can be presented in electronic form.

FORMS & PROCEDURES

Form No: F-13 (Rev 00)

FORM for EXTENSION OF VALIDITY OF BANK GUARANTEE

1. To be typed on non judicial Stamp Papers of value as applicable in the State of India from where the BG has been issued or the State of India where the BG shall be operated
2. The non judicial stamp papers shall be purchased in the name of the Party on whose behalf the BG is being issued or the BG issuing Bank

BANK GUARANTEE No:

Date:.....

To

(Write Designation and Address of Officer of BHEL inviting the Tender)

Dear Sir

Sub : Validity of Bank Guarantee No:..... Dated for
..... Rs in favour of yourself, expiry date, on
account of M/s in respect of Contract
Number....., (herein after called the Original bank Guarantee)

At the request of M/s....., we Bank, having its
branch Office at and having Head office at, do
hereby extend our liability under the above mentioned Bank Guarantee number..... dated
..... for a further period of Months/years from to expire on
.....

Except as provided above, all other terms and conditions of the Original Bank Guarantee No
..... Dated..... shall remain unaltered and binding on us.

Kindly treat this extension as an integral part of the original Bank Guarantee to which it would be attached.

Yours faithfully

Signature.....

Name & Designation.....

Power of Attorney/Signing Power No

Seal of Bank

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#1.01	Cumulative number of days in the month, the nominated Quality Officer or his authorised nominee was not available	QUALITY	1.5		Quality Officer or his authorised nominee should be available for all the days of working at site	Daily Log Book entry/Incident Registers/letter references
#1.02	Number of instances of non- compliance wrt FQP, Standard Drawings, Specifications, E&C Manuals etc.	QUALITY	1.5		No deviation from FQP, Standard Drawings, Specifications, E&C Manuals etc. is allowed without BHEL Engineer's approval.	Daily Log Book entry/Incident Registers/letter references
#1.03	Percentage submission of test certificates for batches of welding electrodes, cement, sand, aggregate, consumable, Paints etc. as applicable for this month OR In case of MM & MH package, monthly checks for Storage/Preservation of material.	QUALITY	1		Submission of 100% Test certificates for materials as per FQP is mandatory. MM & MH package: Storage/Preservation as per manual/procedure.	Daily Log Book entry/Incident Registers/letter references
#1.04	Number of incidences of improper storage & preservation (not in accordance to the guidelines of BHEL MUs or approved FQP) of materials, consumables (viz. gases, welding electrodes & fluxes, fuel etc.) & bought-out items (paints, fasteners etc.) under the custody of the contractor	QUALITY	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#1.05	Rework/ Rejection instances in a month necessitated due to deviation from Standard Drawings /Specifications /Manuals /E&C procedures /FQPs or due to Poor Workmanship by contractor	QUALITY	2		Reworks/ Rejection should be as minimum as possible. Total number of reworks/ rejections due to reasons attributable to contractor.	Daily Log Book entry/Incident Registers/letter references
#1.06	Delay in preparation & submission of signed protocols / log sheets / site register / NDT test reports as per approved FQP/ Qualified Welder List along with photocopies of Welder ID cards / Welder Performance Evaluation records etc. in the month OR in case of MM / MH package reconciliation statement / verification report.	QUALITY	1		Within 2 days of measurements taken or within first 3 working days of next month, as advised by BHEL Engineer	Daily Log Book entry/Incident Registers/letter references
#1.07	Number of instances for Major equipment/product failure due to negligence/improper work/poor workmanship by contractor	QUALITY	1		No such event should happen	Daily Log Book entry/Incident Registers/letter references
#1.08	Total number of complaints received in the month on the quality of finish / aesthetics	QUALITY	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#2.01	Cumulative number of days of delay in submission of Plan FOR THE MONTH supported by deployment plan of Major T&Ps and Manpower (as per Form F-14) and relevant construction/layout drawings - like A4 plan / elevation views of plan status for structures / pressure parts/Civil Works, Piping isometrics for piping, Layout / PID / System reference sketch, Unloading / storage plans etc.as applicable.	PERFORMANCE	5		Number of days delayed from second working day of the month	Daily Log Book entry/Incident Registers/letter references
#2.02	Percentage of timely submission of Daily Reports for Progress of work, Resources, Consumables etc.	PERFORMANCE	1.5		Percentage of timely submission of daily reports/ Scheduled date is successive next day for each day	Daily Log Book entry/Incident Registers/letter references
#2.03	Number of days delayed for submission of FQP log sheets / protocols / Monthly Progress Reports for the work executed during the month under measurement	PERFORMANCE	1.5		Number of days delayed/Scheduled date is first 2 working days of next month	Daily Log Book entry/Incident Registers/letter references
#2.04	Percentage Shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month as per Form-14	PERFORMANCE	35		As per Part-A of Form-14	Progress review formats
#2.05	Number of days delayed in submission of Running bills with complete supporting documents (including updated reconciliation statement of BHEL issued material) for the month	PERFORMANCE	2		Number of days delayed / Scheduled date is 7th day of next month	Daily Log Book entry/Incident Registers/letter references
#2.06	Number of times the Top Management of contractor did not respond to critical issues of site, for the month	PERFORMANCE	1		Total number of instances	Daily Log Book entry/Incident Registers/letter references
#2.07	Cumulative number of days in the month the works were stopped / refused on interpretation of contract clauses/scope due to tendency of taking undue advantage by interpreting contract clauses in their favour	PERFORMANCE	2		Cumulative number of days lost	Daily Log Book entry/Incident Registers/letter references
#2.08	Number of times rework was refused by contractor	PERFORMANCE	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#2.09	Cumulative number of days in the month recording / logging was not done in daily log / history register / hindrance register / soft form in a PC maintained at BHEL Site Office	PERFORMANCE	1		Cumulative number of days recording or logging was not done / all days of the month	Daily Log Book entry/Incident Registers/letter references
#3.01	Percentage of Manpower Deployed w.r.t. Plan for the month as per Form-14.	RESOURCES	7		As per Part-B2 of Form-14	Daily Log Book entry/Incident Registers/letter references
#3.02	Percentage of T&P Deployed w.r.t. Plan for the month as per Form-14.	RESOURCES	7		As per Part-B1 of Form-14	Daily Log Book entry/Incident Registers/letter references
#3.03	Cumulative number of major instances in the month hampering / affecting progress of work due to breakdown or non-availability of major T&P and MME for the work, under the scope of Contractor	RESOURCES	3		Cumulative number of instances	Daily Log Book entry/Incident Registers/letter references
#3.04	Cumulative number of major instances in the month hampering / affecting progress of work due to non-availability of Consumables/ use of improper consumables under the scope of contractor	RESOURCES	3		Cumulative number of instances	Daily Log Book entry/Incident Registers/letter references
#4.01	Number of non-compliances during the month for Statutory requirements like validity of Labour Licence, Insurance Policy, Labour Insurance, PF, BOCW Compliance etc. and any other applicable laws/ Regulation, Electrical Licence, T&P fitness certificate, Contractors' All Risk Policy etc. as applicable	SITE INFRASTRUCTURE & SERVICE	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#4.02	Cumulative number of days in a month poor illumination is reported at storage area, erection area, pre-assembly area and other designated areas by BHEL site.	SITE INFRASTRUCTURE & SERVICE	0.5		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references
#4.03	Cumulative number of days of non-availability of well-maintained toilets facilities for workers (separate for men and women) and non-availability of potable drinking water stations for workers in specified areas.	SITE INFRASTRUCTURE & SERVICE	1		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#4.04	Total number of instances in the month, Housekeeping NOT attended to in spite of instructions by BHEL -i.e. removal / disposal of surplus earth / debris / scrap / unused / surplus cable drums / other electrical items / surplus steel items / packing materials, thrown out scrap like weld butts, cotton waste etc. from the working area to identified locations	SITE INFRASTRUCTURE & SERVICE	2		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references
#4.05	Total number of instances in a month, Site Office with reasonably good facilities including enough nos. of computers and printers etc. for use by office and supporting staff was not made available/maintained.	SITE INFRASTRUCTURE & SERVICE	0.5		No discrepancy during regular or surprise visits	Photograph and report of the Engineer
#5.01	Number of days delayed in making labour payments for the last month	SITE FINANCE	2		Number of days delayed / Scheduled date is 7th day of next month	Daily Log Book entry/Incident Registers/letter references
#5.02	Number of complaints from labour/ sub supplier/ sub-contractor for non-receipt of payments from contractor	SITE FINANCE	1.5		Total number of complaints or reporting	Daily Log Book entry/Incident Registers/letter references
#5.03	Number of times the site operations were hampered for want of funds at the disposal of site-in-charge.	SITE FINANCE	1.5		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#6.01	Cumulative number of days in a month the nominated Safety Officer was not available	HSE & SA	1		Safety Officer should be available for all the days	Daily Log Book entry/Incident Registers/letter references
#6.02	Shortfall in number of weekly safety meetings in the month conducted or attended by the Safety Officer	HSE & SA	0.5		Safety meetings to be held every week	Copy of Minutes of meeting
#6.03	Level of compliance w.r.t decisions taken in previous Safety meetings	HSE & SA	0.5		Number of consolidated issues discussed in Safety meetings	Copy of Minutes of meeting, Non-compliance intimation documents from BHEL site
#6.04	Delay in submission of monthly report on safety (including electrical safety for equipment & personnel etc.) in the prescribed form	HSE & SA	1		Number of days delayed/Scheduled date is third working day of next month	Daily Log Book entry/Incident Registers/letter references
#6.05	Number of days taken for lodging FIRs from date of occurrence/notice of incident of theft / accident etc.	HSE & SA	0.5		Number of days delayed/Scheduled date is within 24 Hrs of occurrence/notice of incidence	Copy of FIR lodged by Contractor

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#6.06	Number of times written(email, letters etc.) warning issued for non-availability/ use of improper Fall protection and rescue arrangement as lifeline, fall arrestors, safety net, hand-railings, covered floors, man-basket, rescue basket & kit etc. by the contractor	HSE & SA	2		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#6.07	Number of times punitive fines imposed for unsafe practices as per contract like non-availability/use of PPEs as safety shoes, helmets, goggles, gloves, lifeline, safety belts etc.	HSE & SA	1		Total number of non-compliances	Non-compliance intimation documents from BHEL site
#6.08	Percentage compliance to Emergency preparedness and response plan: Portable Fire-extinguishers, Buckets, Fire-wardens, display of emergency numbers, mock-drills, Hazard Identification and Risk Assessment(HIRA) etc.	HSE & SA	1		Compliance should be 100% as per HSE Plan or as finalized in Safety Meetings	Non-compliance intimation documents from BHEL site
#6.09	Number of times the agency has defaulted on display of safety posters / safety slogans / safety barriers/emergency numbers etc. in identified areas	HSE & SA	0.5		Total number of instances	Non-compliance intimation documents from BHEL site
#6.10	Non compliances observed during HSE and Safety Audit	HSE & SA	0.5		Total number of non-compliances	Non-compliance intimation documents from BHEL site, Audit Reports
#6.11	Cumulative number of days in the month, non-availability of First Aid Kit, First Aider & Emergency Vehicles/Ambulance.	HSE & SA	0.5		Cumulative number of days	Non-compliance intimation documents from BHEL site
#6.12	Number of days taken for submission of Root Cause analysis (RCA) for the accident from the cut-off date intimated by BHEL for submission of RCA	HSE & SA	0.5		Number of days delayed/Scheduled date is cut-off date intimated by BHEL	Daily Log Book entry/Incident Registers/letter references
#6.13	Non conductance of training (induction, job specific, height work etc.), tool box meeting and health check-up as per Contract requirements	HSE & SA	0.5		Number of incidences of non-conductance during the month	Daily Log Book entry/Incident Registers/letter references
Total			100			

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
	Less Deduction in Score Due to Major Accidents (Fatal, Permanent Disability or bodily injury by which person injured is prevented to resume to work within 48 hours or more after accident,, Major Damage to Equipment etc.) attributable to the contractor @ 3 points/ accident					
	Less Deduction in Score Due to Minor Accidents attributable to the contractor @ 1 point/ accident					
	Less Deduction in Score Due to not Maintaining of Labour Colony (if applicable) as per BHEL HSE policy @2 points in a month on verification any day					
	Final Score					

Performance Score Summary for the Month	Total Score	Score Obtained
QUALITY	10	
PERFORMANCE	50	
RESOURCES	20	
SITE INFRASTRUCTURE & SERVICE	5	
SITE FINANCE	5	
HSE & SA	10	
OTHERS (deductions if any)	0	
TOTAL	100	

Note:

- 1) It is only indicative and shall be as per the online format issued by BHEL time to time.
- 2) No request will be entertained after specified date of current month w.r.t. changes requested in the scores of immediate previous month.

FORMS & PROCEDURES

Form No: F-19 (Rev 00)

MILESTONE COMPLETION CERTIFICATE **(issued by BHEL on the specific request of Contractor)**

Ref :

Date:

To,

(Name & address of Contractor)

Dear Sir,

References

1. Contract No:
2. Job Description:

This is to hereby confirm that the following Milestone Activity has been achieved in respect of the Contract /Job under reference

Sl No	Milestone Activity	Remarks

This certificate is issued as per your request vide letter no
without any prejudice to the rights of BHEL in line with the terms and conditions of the
above referred Contract

Yours faithfully,

For and on behalf of Bharat Heavy Electricals Limited

Construction Manager/Head (Subcontracts)

FORMS & PROCEDURES

Form No: F-20 (Rev 01)

CONTRACT COMPLETION CERTIFICATE (Issued by BHEL/HQ on the specific request of Contractor)

Ref :

Date:

To Whom so ever it may concern

1	DESCRIPTION OF WORK	
2	NAME AND ADDRESS OF THE CONTRACTOR	
3	CONTRACT NO	
4	CONTRACT VALUE	
5	LETTER OF INTENT NO & DATE	
6	CONTRACT PERIOD//CONTRACT DURATION	
7	DATE OF START/COMPLETION	
8	FINAL EXECUTED VALUE	
9	PERFORMANCE	GOOD SATISFACTORY UNSATISFACTORY

This certificate is issued as per your request vide letter no
without any prejudice to the rights of BHEL to use this certificate for evaluation of your offers for future
tenders

Yours faithfully,

For and on behalf of Bharat Heavy Electricals Limited

Head (Subcontracts)

FORMS & PROCEDURES

Form No: F-21 (Rev 00)

INDEMNITY BOND

(To be executed on a Non Judicial Stamp Paper of the requisite value as per Stamp Duty prevalent in the respective State)

This Indemnity Bond executed by <name of company> having their Registered Office at <xxxxxxxxxxx> in favour of M/s Bharat Heavy Electricals Limited, a Company incorporated under the Companies Act, 1956, having its Registered Office at BH EL House, Siri Fort, Asiad, New Delhi - 110049 through its Unit at Power Sector _____ Region, _____, _____ State.
(Hereinafter referred to as the Company)

And whereas the Company has entered into a Contract with M/s xxxxxxxxxx, the executants of this Deed (hereinafter referred to as the Contractor) as its contractor in respect of the work of "xxxxxxxxxxxxxxxxxxxxxxxxxxxxxx".

AND WHEREAS under the provisions of G C C further stipulates that the Contractor shall indemnify the Company against all claims of whatever nature arising during the course of execution of Contract including defects liability period of <xx Months> i.e till <xx xx xxxx>

Now this deed witnesses that in case the Company is made liable by any Authority including Court to pay any claim or compensation etc. in respect of all labourers or other matters at any stage under or relating to the Contract with the Contractor, the Contractor hereby covenants and agrees with the Company that they shall indemnify and reimburse the Company to the extent of such payments and for any fee, including litigation charges, lawyers' fees, etc, penalty or damages claimed against the Company by reason of the Contractor falling to comply with Central/States Laws, Rules etc, or his failure to comply with Contract (including all expenses and charges incurred by the Company).

The Contractor further indemnifies the Company for the amount which the Company may be liable to pay by way of penalty for not making deductions from the Bills of the Contractor towards such amount and depositing the same in the Government Treasury.

FORMS & PROCEDURES

The Contractor further agree that the Company shall be entitled to with hold and adjust the Security Deposit and/or with ho ld and adjust payment of Bills of Contractor pertaining to this Contract against any payme nt which the Company has made or is required to mak e for which the Contractor is liable under the Contract and that such amount can be withheld, adjusted by the Company till satisfactory and final settlement of all pending matters and the Contractor hereby gives his consent for the same.

The Contractor further agrees that the terms of indemnity shall s urvive the termination or completion of this contract.

The contractor further agrees that the liability of the contractor shall be extended on actual basis notwithstanding the limitations of liability clause, in respect of :

1. breach of terms of contract by the contractor
2. breach of laws by the contractor
3. breach of Intellectual property rights by the contractor
4. breach of confidentiality by the contractor

Nothing contained in this deed, shall be construed as absolving or limiting the liability of the Contractor under said Contract between the Company and the Contractor . That this Indemnity Bond is irrevocable and the condition of the bond is that the Contractor shall duly and punctually c omply with the terms and the conditions of this deed and contractu al provisions to the satisfaction of the Company.

In witness where of M/s xxxxxxxxxxxxxx these presents on the day, month and year first, above written at xxxxxxxx by the hand of its signatory Mr. xxxxxxxxxxxx.

Signed for and on behalf of
M/s xxxxxxxxxxxxxxxxxxxx

Witness:

1
2

FORMS & PROCEDURES

Form No: F-22 (Rev 00)

CONSORTIUM AGREEMENT

(To be executed on Rs. 50/- Non – Judicial Stamp Paper)

THIS AGREEMENT is made and executed on this _____ day of _____, by and between (1) M/s _____, (The First Party, i.e, the Bidder) a company incorporated under the Company's Act 1956, having its registered office at _____ (herein after called the "Bidder", which expression shall include its' successors, administrators, executors and permitted assigns) and (2) M/s _____, (The Second Party, i.e, the associates), a company incorporated under the Company's Act 1956, having its registered office at _____ (herein after called the " Associates", which expression shall include its' successors, administrators, executors and permitted assigns).

WHEAEAS the Owner, Bharat Heavy Electricals Ltd, a Government of India Undertaking, proposes to issue / issued an NIT (herein after referred to as the said NIT) inviting bids from the individual Bidders for undertaking the work _____ of _____ at _____ (herein after referred to as the said works).

WHEREAS the said NIT enables submission of a bid by a Consortium subject to fulfillment of the stipulations specified in the said NIT.

AND WHEREAS M/s _____ (The First Party, i.e, the Bidder) will submit its proposal in response to the aforesaid invitation to _____ bid by the Owner for _____ as detailed in the Bid doc. no. < TENDER REF----->

FORMS & PROCEDURES

AND WHEREAS M/s _____ (The First Party, i.e the Bidder) itself is meeting all the qualifying requirements except the qualifying requirements of _____ (as detailed in the NIT) and in order to fully meet the qualifying requirements of NIT, this tie-up agreement is _____ being entered into with M/s _____ (The Second Party, the Associates), who fully meet the balance part of the said work _____ (_____).

WHEREAS the First Party and the Second Party are contractors engaged in the business of carrying out various items of works. WHEREAS the two parties have agreed to constitute themselves into a consortium for the purpose of carrying out the said works, and that the consortium will be continued till the completion of the works in all respects.

WHEREAS the parties have agreed to certain terms and conditions in this regard:

NOW THEREFORE THIS AGREEMENT WITNESSETH AS FOLLOWS :

1. First and Second parties hereby constitute themselves into a Consortium for the purpose of bidding and undertaking the said works pursuant to the said NIT as hereinafter stated.
2. The First Party will be the leader (Lead Partner) and will be responsible for the entire works.

FORMS & PROCEDURES

CONSORTIUM AGREEMENT

3. The First Party shall undertake the following part(s) of work detailed in _____ the NIT namely _____
4. The Second Party shall undertake the following part(s) of work detailed _____ in the said NIT namely _____
5. The parties hereby declare and confirm that each of them will fulfill the required minimum qualifying requirements as prescribed in the said NIT for the works agreed to be undertaken by them as stated here-in-above.
6. It is also agreed between the parties hereto that all of them shall be individually and severally responsible for the completion of the said works as per the schedule. Further, if the Employer/Owner sustains any loss or damage on account of any breach of the Contracts, we the, Consortium partners individually and severally undertake to promptly indemnify and pay such losses / damages caused to the Employer/Owner on its written demand without any demur, reservation, contest or protest in any manner whatsoever.
7. The parties hereby agree and undertake that they shall provide adequate finances, suitable Tools, Plants, Tractors, Trailers, other transportation equipment, other Tools & Plants, Measuring & Monitoring Equipments (MMEs), Men and Machinery etc. for the proper and effective execution of the works to be undertaken by them as specified here-in-above.

FORMS & PROCEDURES

8. It is agreed interse between t he parties hereto that all the consequences liabilities etc., arising out of any default in the due execution of the said works shall be borne by the party in default, that is by party in whose area of works default has occurred, provided however, so far as M/s Bharat Hea vy Electricals Limited is concerned, all the parties shall be liable jointly and severally.

IN WITNESS HEREOF the parties above named have signed this agreement on the day month and year first above written at _____(Place) .

WITNESS

For

1. NAME (FIRST PARTY)

2. OFFICIAL ADDRESS

WITNESS

For

1. NAME (SECOND PARTY)

2. OFFICIAL ADDRESS

[The successful bidder shall have to execute the " JOINT DEED OF UNDERTAKING " in the format to be made available by BHEL at the time of awarding].

FORMS & PROCEDURES

Form No: F-23 (Rev 00)

REFUND OF SECURITY DEPOSIT

To,
The Construction Manager
BHEL Site Office

Dear Sir,

Sub : **Refund of Security Deposit**

Ref : Contract No:

Work:.....

I/We have submitted Final Bill in respect of the above Contract/Work vide our letter no:.....
dated In line with Tender conditions (GCC clause no 1.11), kindly arrange to
release/refund the Security Deposit along with Final Bill payments.

The details of Security Deposit are as below:

1. Cash Portion :
2. BG Portion :

Thanking You

Date: _____

Authorised representative of Contractor

To be filled up by BHEL

1. Security Deposit to be refunded:
 - a. Cash Portion:
 - b. BG Portion :
2. Less
 - a. Amount spent by BHEL on behalf of Contractor:
 - b. Payments made by BHEL on behalf of Contractor:
 - c. Other recoveries for Services etc
 - d. Any other recoveries
 - e. Total of 'a' to 'd':
3. Net Amount to be released (1-2) :
4. Certified that
 - a. The payment recommended for release is in order and there are no demands other than those included in the claim outstanding from the Contractor
 - b. Contract Guarantee period of Months commenced wef : _____
 - c. All objections raised so far have been settled
 - d. A note for refund of Security Deposit has been made in the Measurement Book

Signature of BHEL Engineer

Construction Manager

Date:-----

FORMS & PROCEDURES

Form No: F-24 (Rev 00)

REFUND OF GUARANTEE MONEY

BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR, _____ REGION

Ref No:

Date:

1. Name and Address of Contractor :
2. Contract Agreement/LOI No :
3. Date of Contract Agreement/LOI :
4. Name of the Work undertaken :
5. Date of commencement of the Work :
6. Date of Completion of the Work :
7. Period of Maintenance :
(Guarantee Period)
8. Date on which the Final Bill was paid :
9. Last date of making good the defect :
during Maintenance Period
10. Expenditure incurred by BHEL during :
Maintenance Period, if any, recoverable
11. Date on which Guarantee Money refund:
falls due as per Contract
12. Amount of Guarantee Money to be refunded:
13. Less Amounts recoverable (with details)
 - a. Amount spent by BHEL on maintenance :
 - b. Payments made by BHEL on behalf of Contractor:
 - c. Court dues/penalties/compensation :
 - d. Other recoveries for Services, etc :
 - e. Total of 'a' to 'd' :
14. Net Amount recommended for release (12-13) :

FORMS & PROCEDURES

Signature of BHEL Engineer

Date: _____

CERTIFICATE TO BE FURNISHED BY THE CONTRACTOR

I/We have no claim or demand outstanding against BHEL _____, for the work done or for labour or material supplied or any other account arising out of or connected with the Contract Agreement/LOI (No _____ dated _____) and the payment of this bill shall be in full and final settlement of all my/our claims and demands including the 'Deposits' of the Contract Agreement/LOI referred to.

Signature of Contractor

Date: _____

CERTIFICATE TO BE FURNISHED BY SENIOR ENGINEER/CONSTRUCTION MANAGER

1. Certified that
 - a. The payment recommended for release is in order and there are no demands other than those included in the claim outstanding from the Contractor
 - b. Maintenance period (Contract Guarantee period) is over and the Contractor has carried out the works required to be carried out by him during the period of maintenance (Guarantee) to our satisfaction, and all expenses incurred by the Company on carrying out such works have been included for adjustment
 - c. All objections raised so far have been settled
 - d. A note for refund of Guarantee Amount has been made in the Measurement Book and Contract Agreement/Work Order

Signature of BHEL Engineer

Construction Manager

Date:-----

FOR USE IN ACCOUNTS DEPARTMENT

Passed for Rs _____ (Rupees _____ only)

Accountant

Accounts Officer

ACKNOWLEDGE BY THE CONTRACTOR

Received Rs _____ in full and final settlement of my/our claim

Signature of Contractor

Date: _____

FORMS & PROCEDURES

Form No: F-25 (Rev 00)

POWER OF ATTORNEY for SUBMISSION OF TENDER/SIGNING CONTRACT AGREEMENT

(To be typed on non judicial Stamp Papers of appropriate value as applicable and Notarised)

KNOW ALL MEN BY THESE PRESENTS, that I/We do hereby make, nominate, constitute and appoint Mr, whose signature given below herewith to be true and lawful Attorney of M/s..... hereinafter called 'Company', for submitting Tender/entering into Contract and inter alia, sign, execute all papers and to do necessary lawful acts on behalf of Company with M/s Bharat Heavy Electricals Ltd, Power Sector _____ Region, _____, in connection with

.....
.....
..... vide Tender Specification No :
_____, dated _____.

And the Company do hereby agree to ratify and confirm all acts, deeds, things or proceedings as may be lawfully done by the said attorney and by or on behalf of the company and in the name of the company, by virtue of the powers conferred herein and the same shall be binding on the company and shall have full force and effect.

IN WITNESS WHEREOF the common seal of the company has been hereunto affixed in the manner hereinafter appearing on the document.

Dated at _____, this _____ day of _____

Director/CMD/Partner/Proprietor

Signature of Mr.....(Attorney)

Attested by: Director/CMD/Partner/Proprietor

Witness

Notary Public

FORMS & PROCEDURES

Form No: F-26 (Rev 00)

ANALYSIS OF UNIT RATES QUOTED

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

Offer Reference No:.....

Date:.....

To,
(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : Analysis of Unit Rates Quoted

Ref : Tender Specification No:

Analysis of Unit Rates quoted by us in respect of above Tender is as detailed

SN	DESCRIPTION	% OF QUOTED RATE	REMARKS
01	SITE FACILITIES VIZ., ELECTRICITY, WATER OTHER INFRASTRUCTURE.		
02	SALARY AND WAGES + RETRENCHMENT BENEFITS		
03	CONSUMABLES		
04	T&P DEPRECIATION & MAINTENANCE		
05	ESTABLISHMENT & ADMINISTRATIVE EXPENSES		
06	OVERHEADS		
07	PROFIT		
	TOTAL	100%	

Yours faithfully,

(Signature, Date & Seal of Authorized
Representative of the Bidder)

FORMS & PROCEDURES

Form WAM 6

BHARAT HEAVY ELECTRICALS LIMITED DIVISION.....

Running Account Bill

(Para 4.31.1 of Works Accounts Manual)

Name of the Contractor:
Name of the Work:
Sanctioned Estimate:
Code No:
Contract Agreement No :

Dated:

Departmental Bill no:
Division:
Date of written order to commence the work :
Date of commencement of the Work:
Due date of completion as per Agreement:

Date:
Sub-Division:

1. ACCOUNT OF WORK EXECUTED

On account payment for work not previously previously measured**			Item No of	Description of Work	Quantity as per agree- ment	Quantity executed up to date	Rate	Unit	Payment on the basis of actual measure- ment up to date	Quantity since last running account bill	Payment on the basis of actual measurement since last running account bill	Remarks	
Total As per Running Account bill	since last running account bill	Total up to date											
Rs.	Rs.	Rs.					Rs.	P.	Rs.	P.	Rs.	P.	
1	2	3	4	5	6	7	8	9	10	11	12	13	

- * *1. Whenever payment is made on 'on account' basis without actual measurements the amount in whole rupees should be entered in columns 1 to 3 only and not in columns 7 to 12.
2. whenever there is an entry in column 12 on the basis of actual measurement, the whole of the amount previously paid without detailed measurement should be adjusted by a minus entry in column 2 equivalent to the amount shown in column 1, so that the total up to date in column 4 may become nil.

FORMS & PROCEDURES

Form WAM 6 (contd...)

1	2	3	4	5	6	7	8	9	10	11	12	13

Total value of work done up to date (A) ...

Deduct value of work shown on the last
Running Account Bill (B) ...

Net value of work done since last (C) ...

Rupees (in words)

.....only.

FORMS & PROCEDURES

Form WAM 6 (contd...)

II.MEMORANDUM OF PAYMENTS

		Rs.	P.		I	II
					Rs.	P.
1.Total value of work actually measured as per Account No. I. Column 10	(A)					
2.Total up to date 'on account' payment for work covered by approximate Or plan measurements as per Account No. I, Column 3	(B)					
3.Total up to date secured advances on security of materials as per column 8 Of the enclosed Account (Form WAM 10)	(C)					
4.Total up to date payments [(A) + (B) + (C)]	(D)					
5.Total amount of payments already made as per Entry (D) of last Running Account Bill No..... Dated.....forwarded to the Accounts Office on	(E)					
6.Balance [(D)-(E)]						
7.Payments now to be made:						
a) by cash/cheque						
b) by deduction for value of materials supplied						
c) by BHEL vide Annexure A attached						
d) by deduction for hire of tools and plant vide						

FORMS & PROCEDURES

Annexure B attached		
e) by deduction for other charges vide Annexure C		
Attached		
f)by deduction on account of security deposit		
h) by deduction on account of Income Tax		

Note: Amounts relating to items 4 to 6 above should be entered in column II and those relating to item 7 in column I. The amount shown against item 6 and the total of item 7 should agree with each other.

III.CERTIFICATE OF THE ENGINEER IN CHARGE

Form WAM 6 (contd...)

1. The measurements on which the entries in column 7 to 12 of Part I of this Bill (Account of work executed) are based were made by.....and are recorded at pages.....of
(Name and Designation)

Measurement Book No

2. Certified that the methods of measurement are correct and the work has been carried out in accordance with the terms and conditions, schedules, specifications and drawings etc, forming part of the contract agreement, subject to deviations included in the deviation statement (Annexure D).
3. Certified that in addition to and quite apart from the quantities of work actually executed as shown in column 10 of Part I, some work has actually been done in connection with several items and the value of the such work is, in no case, less than 'on account' payments as per column 3 of Part I, made or proposed to be made, for the convenience of the contractor in anticipation of, and subject to the results of, detailed measurement which will be made as soon as possible.

Signature of Contractor

Signature of Engineer in charge

Date:

Designation:

Date:

1. Certified that measurements have been check measured to the prescribed extent by at site and also by the undersigned and the relevant entries have been intialled in the Measurement book. (vide pages.....)
(Name and Designation)

2. Certified that all the measurements recorded in the measurement book have been correctly billed for

3. Certified that all recoberable amounts in respect of materials tools and plant etc, and other charges have been correctly made vide Annexures A to C attached.

Certified for payment * of Rs.....(Rupees.....only)

To be paid in cash/by cheque in the presence of

ALLOCATION		
The expenditure is chargeable as under and to be included in the accounts for.....	20.....	
Ledger Head	Debit (Gross amount)	Credit (Deductions)

	Rs.	P.		Rs.	P.
Total					

* Here specify the net amount payable.

Signature of Senior Engineer
Date:

Form WAM 6 (contd...)

Accounts Bill No Dated.....
Entered in Journal Book vide entry No..... Dated.....
Passed for.....Rs.....
Less Deductions.....Rs.....
Net Amount Payable.....Rs.....
(Rupees.....only)
Payable to Shri/M/s.....by cheque/cash
Entered in Contractor's Ledger No.....Page.....

ALLOCATION				
Estimate No: _____ Name of the Work: _____			Code no: _____	
	Debit		Credit	
Ledger Head	(Gross amount)		(Deductions)	
	Rs.	P.	Rs.	P.

FORMS & PROCEDURES

Assistant Date:	Accountant Date:	Account Officer Date:	Total	-----	-----

VI. Received Rs.....(Rupees.....only) as per
Memorandum of Payments on account of this work.

Signature of witness Address : Date:	Revenue	Stamp Signature of Contractor Date:

VII. ENTRIES TO BE MADE BY TREASURY SECTION

Cash Book entry No. and date:	Amount paid	Rs.....
	Amount unpaid	Rs.....
	Total	Rs.....
	Signature of Cashier	
	Date:	

Form WAM 6 (contd...)

ANNEXURE A

FORMS & PROCEDURES

Statement showing details of materials issued to the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No.	Stores issue Voucher No. and date	Issue voucher No. and date allotted by stores to the SIV	Description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Whether recoverable from the contractor or supplied free	If recoverable from the contractor				R E M A R K S
							Rate at which recoverable	Amount recoverable	Amount recovered up to previous bill	Balance now recovered	
							Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8	9	10	11	12
Total											

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE B

Statement showing tools and plant issued to the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No	Description of tools and plant issued	Period for which	Rate at which	Amount recover-	Amount recovered	Balance now	Remarks
		Issued	recovery	able	upto	recovered	
			Is to be		previous		
			Made		bill		
			Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8

Total

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE C

Statement showing details of other recoveries to be made from the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No	Particulars	Unit	Quantity	Rate	Amount recover- able	Amount recovered upto pre- vious bill	Amount now recovered	Remarks
				Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8	9

1. Water Charges
2. Electricity charges
3. Seignorage charges
4. Medical charges
5. Cost of empty gunny bags and
Empty containers not returned
- 6.
- 7.
- 8.
- 9.

FORMS & PROCEDURES

10.

Total

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE D

Name of the Contractor:
Name of the Work:

Contract Agreement No:
Date:

Sl. No.	Description of item	Unit	Quantity as per Agreement	Quantity as executed	Quantity further anticipated	Total quantity anticipated on completion	Rate as per agreement Rs. P.
1	2	3	4	5	6	7	8

Rate as the executed with any Rs. P.	Amount as per agreement Rs. P.	Amount as executed Rs. P.	Amount further anticipated Rs. P.	Total amount anticipated on completion Rs. P.	Difference Excess savings Rs. P. Rs. P.	Reason for deviation authority, if
9	10	11	12	13	14 15	16

Signature of Engineer in Charge
Date:

Signature of Senior Engineer
Date:

FORMS & PROCEDURES

[illegible]

[illegible]

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

II MEMORANDUM OF PAYMENT												
										Rs.	P	
1	Total Value of work actually measured as per Account no I column 10 (A)											
2	Deduct amount of paym,ents already made as per last running account bill No Dated..... Forwarded to the Accounts Office on (B)											
3	Payments now to be made { (A) - (B)} (C)											
4	Deduct ammounts recoverable from the contractor on account of :								Rs	P		
	a	Material suplied by BHEL vide annexure A attached										
	b	Hire of Tools & Plants vide Annexure B attached										
	c	Other charges vide Annexure C attached										
	d	Income Tax										
	Total deduction											
5	Balance											
6	Refund of 50% of security deposite on completion of work											
7	Net amount to be paid to the Contractor											
III. CERTIFICATE OF THE ENGINEER IN CHARGE												
1	The measurement on which the entries in coulms 7 to 12 of Part I of this bill (Account of work executed) are based were made by (Name and designation)											
2	A statement showing the quantities of stores issued to the contractor (whether free or on recovery basis) and their disposal is attached.											
	Date:							Signature of Engineer in charge				
								Designation				

[illegible]

V. ENTRIES TO BE MADE IN THE ACCOUNTS OFFICE																																								
Account Bill no..... Dated Entered in Journal book vide entry No.....Dated..... Passed for.....Rs..... Less Deductions.....Rs..... (Rupees.....Only) Payable to Shri/M/s..... by cheque/cash Entered in contractors' Ledger no..... Page						<table style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="4" style="text-align: center;">ALLOCATION</th> </tr> <tr> <td colspan="2" style="text-align: center;">Estimate No:</td> <td colspan="2" style="text-align: center;">Code No</td> </tr> <tr> <td colspan="4" style="text-align: center;">Name of the Work</td> </tr> <tr> <td style="text-align: center; width: 33%;">Ledger Head</td> <td style="text-align: center; width: 33%;">Debit (Gross Amount)</td> <td colspan="2" style="text-align: center;">Credit (Deduction)</td> </tr> <tr> <td></td> <td style="text-align: center;">Rs P</td> <td colspan="2" style="text-align: center;">Rs</td> </tr> <tr> <td style="text-align: center;">.....</td> <td style="text-align: center;">.....</td> <td colspan="2" style="text-align: center;">.....</td> </tr> <tr> <td style="text-align: center;">Total</td> <td style="text-align: center;">.....</td> <td colspan="2" style="text-align: center;">.....</td> </tr> </table>							ALLOCATION				Estimate No:		Code No		Name of the Work				Ledger Head	Debit (Gross Amount)	Credit (Deduction)			Rs P	Rs						Total			
ALLOCATION																																								
Estimate No:		Code No																																						
Name of the Work																																								
Ledger Head	Debit (Gross Amount)	Credit (Deduction)																																						
	Rs P	Rs																																						
.....																																								
Total																																								
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">Assistant Date:</td> <td style="width: 33%;">Accountant Date:</td> <td style="width: 33%;">Accounts officer Date:</td> </tr> </table>						Assistant Date:	Accountant Date:	Accounts officer Date:	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> </tr> </table>																															
Assistant Date:	Accountant Date:	Accounts officer Date:																																						
VI. Received Rs.....(Rupees.....Only) in full and final settlement of all moneys due under this contract and I / we have no further claims of this contract.																																								
Signature of Witness Address																																								
Revenue Stamp Signature of Contractor Date:																																								
VII . ENTRIES TO BE MADE BY TREASURY SECTION <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; vertical-align: top;"> Cash book entry no and date : </td> <td style="width: 50%; vertical-align: top;"> Amount Paid Rs..... Amount unpaid Rs..... Total Rs..... </td> </tr> </table> Signature of Cashier Date:													Cash book entry no and date :	Amount Paid Rs..... Amount unpaid Rs..... Total Rs.....																										
Cash book entry no and date :	Amount Paid Rs..... Amount unpaid Rs..... Total Rs.....																																							

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

BHARAT HEAVY ELECTRICALS LIMITED DIVISION..... And Final bill (Para 4.3.2 Of Works Accounts Manual)														
Name of Contractor							Departmental Bill no				Date			
Name of the Work							Division				Division			
Sanctioned Estimate							Date of written order to commence the work							
Contract Agreement/work Order No							Date of commencement of work							
							Due date of completion as per agreement							
							Date of actual completion of the work							
I. ACCOUNT OF WORK EXECUTED														
On Account payment for the work not previously measured **										Payment on the basis of actual measurement up to date Rs P	Quantity since last running account bill	Payment on the basis of actual measurement since last running account bill Rs P	Remarks	
Total as per last running account bill Rs.	Since last running account bill Rs	Total up to date Rs												
1	2	3	4	5	6	7	8	9	10	11	12	13		

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NKP-C1999:19

1	2	3	4	5	6	7	8	9	10	11	12	13

Total Value of Work Done up to date (A)	
Deduct Value of work shown on the last running account bill (B)	
Net value of work done since last running account bill (C)	

Rupees (In Words).....Only

II MEMORANDUM OF PAYMENT

		Rs.	P
1	Total Value of work actually measured as per Account no I coloumn 10	(A)	
	Deduct amount of paym,ents already made as per last running account bill No Dated.....		
2	Forwarded to the Accounts Office on	(B)	
3	Payments now to be made { (A) - (B)}	(C)	
4	Deduct ammounts recoverable from the contractor on account of :	Rs	P
	a Material suplied by BHEL vide annexure A attached		
	b Hire of Tools & Plants vide Annexure B attached		
	c Other charges vide Annexure C attached		
	d Income Tax		
	Total deduction		
5	Balance		
6	Refund of 50% of security deposite on completion of work		
7	Net amount to be paid to the Contractor		

III. CERTIFICATE OF THE ENGINEER IN CHARGE

The measurement on which the entries in coulums 7 to 12 of Part I of this bill (Account of work executed) are based were made by

1	(Name and designation)
2	A statement showing the quantities of stores issued to the contractor (whether free or on recovery basis) and their disposal is attached.

Date:

Signature of Engineer in charge
Designation

IV CERTIFICATE OF THE SENIOR ENGINEER

- 1 Certified that I have personally inspected the work and that the work has been physically completed on the due date in accordance with the terms and
Cretified that the measurements have been check measured to the prescribed extent by
..... (Name & designation). And by the the undersigned at site and relevent entries have been initiated in the measurement book (vide
2 pages.....)
- 3 Certified that the methods of measurement are correct
- 4 Certified that the measurements have been technically checked with reference to contract drawings, deviations etc
- 5 Certified that all the measurements recorded in the measurement book have been correctly billed for at the contract rates or approved rates.
- 6 Certified that all the recoverable amounts in respect of stores, tools and pallant, elwater, electricity charges etc, have been correctly made vide Annexures A
- 7 Certified that the issues of all stores as per statement atytached (whether charged to the contractor or direct to the work) have been technically checked and

Certified for payment of * Rs (Rupees.....) (Only). To be paid in
cash/by cheque in the presence of

ALLOCATION

The expenditure as under and to be included in the accounts for 19

Ledger Head	Debit (Gross Amount)		Credit (Deduction)	
	Rs.	P	Rs.	P
.....				
Total				

* Here specify the net amount payable

Signature of Senior Engineer
Date

V. ENTRIES TO BE MADE IN THE ACCOUNTS OFFICE

Account Bill no..... Dated
Entered in Journal book vide entry No.....Dated.....
Passed for.....Rs.....
Less Deductions.....Rs.....
(Rupees.....Only)
Payable to Shri/M/s..... by cheque/cash
Entered in contractors' Ledger no..... Page

ALLOCATION		Code No
Estimate No:		
Name of the Work		
Ledger Head	Debit (Gross Amount) Rs P	Credit (Deduction) Rs
.....		
Total		

Assistant	Accountant	Accounts officer
Date:	Date:	Date:

VI. Received Rs.....(Rupees.....Only) in full and final settlement of all moneys due under this contract and I / we have no further claims of this contract.

Signature of Witness
Address

Revenue Stamp
Signature of Contractor
Date:

VII . ENTRIES TO BE MADE BY TREASURY SECTION

Cash book entry no and date :

Amount Paid Rs.....
Amount unpaid Rs.....
Total Rs.....

Signature of Cashier
Date:

ANNEXURE A

Part I

Statement showing details of material issued to the contractor Shri/M/s..... In respect of Contract

Agreement/Work Order No..... Dated

SI No	Stores Issue voucher No and date	Issue voucher No and date alloted by stores to the SIV	description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Whether recoverabl e from the contractor or supplied free	Rate at which recoverable		Amount Recoverabl e		Amount recoverable upto previous bill		Balance Now recovered		Remarks
							Rs	P	Rs	P	Rs	P	Rs	P	
1	2	3	4	5	6	7	8		9		10		11		12

Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE A

Part II

Statement showing details of material issued to the contractor Shri/M/s..... in respect of Contract Agreement/Work Order No..... Dated and not covered by the agreement

SI No	Stores Issue voucher No and date	Issue voucher No and date alloted by stores to the SIV	description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Issue Rate		Amount Recoverabl e		Amount recoverable upto previous bill		Balance Now recovered		Remarks
						Rs	P	Rs	P	Rs	P	Rs	P	
1	2	3	4	5	6	7		8		9		10		11

Total

Add Departmental Charges

Add Sales Tax (wherever applicable)

Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE B

Statement showing TOOLS & PLANTS issued to the contractor Shri/M/s..... in respect of Contract Agreement/Work Order No..... Dated and not covered by the agreement

SI No 1	Description of tools & plants issued 2	Period for which issued 3	Rate at which Recivry is to be made 4	Amount recoverabl e		Amount recoverable upto previous bill		Balance Now recovered		Remarks 8
				Rs	P	Rs	P	Rs	P	
				5		6		7		

Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE C

showing detail of other recoveries to be made from the contractor Shri/M/s.....
nent/Work Order No.....Dated.....

Sr.No	Particulars	Unit	Quantity	Rate Rs. P.	Amount recoverable Rs. P	Amount recovered upto previous bill Rs. P.	Amount now recovered Rs. P.	Remarks
1	2	3	4	5	6	7	8	9
	1 Water Charges							
	2 Electricity Charges							
	3 Seignorage Charges							
	4 Medical Charges							
	Cost of empty gunny bags and empty containers not 5 returned							
	6							
	7							
	8							
	9							
	10							
Total								

Signature of Contractor
Date

Signature of Engineer Incharge
Date

Signature of Sr. Engineer
Date

Form WAM 7 (Contd.)

ANNEXURE D -
DEVIATION STATEMENT :

Name of the Contractor :

Contract Agreement/Work Order No. :

Name of the Work :

Date :

Sl. No.	Description of item	Unit	Quantity as per agreement	Quantity as executed	Rate as per agreement Rs. P.	Rate as executed Rs. P.	Amount as per agreement Rs. P.	Amount as executed Rs. P.	Difference		Reason for the deviation with authority, if any
									Excess	Savings	
1	2	3	4	5	6	7	8	9	10	11	12

Signature of Engineer in Charge

Date :

Signature of Senior Engineer

Date :

ANNEXURE E

Statement showing the consumption of materials issued to the contractor Shri/M/s.....
in respect of Contract Agreement/Work Order No..... Dated.....

Name of the Work :

ON RECOVERY BASIS

Sl. No.	Description of material	Unit	Quantity actually issued	Quantity actually incorporated in the work	Balance	Particulars of disposal of balance	Quantity to be issued as per approved data for work actually done	Variation in consumption (Difference between column 5 and 8)		Rate chargeable for excess/short consumption, if any	Amount recoverable for excess/short consumption, including materials not returned	
								More	Less	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8	9	10	11	12	13
1.	Cement											
2.	Bricks											
3.	Wood.....											
4.	Asbestos Sheet											
5.	Iron Materials											
6.												
7.												
8.												
9.												
10.												

Signature of Contractor

Date :

Signature of Engineer in Charge

Date :

Signature of Senior Engineer

Date :

Note : 1. The quantities shown in columns 4 and 5 above should tally with those shown in columns 5 and 6 respectively of Annexure A (Part I and II).

2. Data statement of theoretical consumption should be attached in support of quantity specified in column 8.

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Name of the work :	
Name of the Contractor :	
Date of commencement of the work:	
Contract agreement/work ordered no. and date:	
Reference to supplementary agreement no,if any :	
Whether administrative approval and technical sanction has been accorded by the competent authority ? If so ,cite reference	
Whether sanction of the competent authority and financial concurrence of the Accounts Department for award of the work has been accorded ? If so,cite reference.	
Whether the work has been completed in time ? If not ,whether penalty has been levied or sanction of the competent authority for extension of time granted and communicated to the Accounts Department with reasons for grant of extension? (Due and actual date of completion of the work and reference to letter no. and date granting the extension of time should be given)	
(a) Whether the rates allowed in the bill have been checked with the contract agreement ? (b) Whether the rates for extra/supplemental items have been approved by the competent authority and the sanction communicated to the accounts Department together with rate analysis? If so,cite reference.	
Whether deviations have been approved by the competent authority? If yes, give reference to the approval; if not, give reasons.	
Whether the rates of recovery of stores issued to the contractor which are not provided for in the Contract Agreement have been settled in consultation with Finance?	
Whether discrepancies pointed out by the Accounts Department in the store statement have been reconciled and accepted by the Accounts Department?	

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Whether materials issued to the contractor in excess of the theoretical requirements have been returned to the Stores Department and the no. and date of such returned stores vouchers have been shown in stores statement? If not, whether the cost of such excess material has been recovered at the prescribed rate? Whether consumption statements in respect of materials chargeable to the work have been attached to the bill?	
Whether consumption of materials shown has been technically checked by Senior Engineer?	
Whether materials issued and used in the work is not less than that required for consumption in work according to our specification? If consumption is less, whether necessary recovery has been made in the bill?	
Whether measurements have been checked by the Engineer and Sr. Engineer to the extent required and certificates of check recorded in the measurement books?	
Whether contractor has signed the bill and the measurement books without reservations? If not, whether reasons have been intimated to the Accounts Department?	
Whether arithmetical calculations have been checked and certificate recorded in the measurement books by a person other than the one who calculated initially	
Whether any work was done at the risk and cost of the contractor and whether such cost has been recovered from him? Give particulars.	
Whether all advance payments on running Accounts have been recovered?	
Whether all the recoveries due to services given to the contractor like rent of accommodation, water charges, electricity charges etc. have been recovered and whether payments made by the company on behalf of the contractor have been adjusted?	
Whether the files containing abstracts from measurement books/ standard measurement books have been completed/ updated?	
Whether hire charges of tools and plant have been recovered and the statement of hire charges with full details attached?	

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Whether the certificate of workmanship and completion of work according to specifications, drawings etc. is recorded by Engineer/ Sr. Engineer and whether recoveries have been made for defective works, if any?	
Whether all corrections in the bill/measurement books etc. have been neatly made and attested and there are no overwriting?	
Whether final measurements have been taken as soon as possible after completion of work and the certificate of completion issued? If not, whether reasons for delay have been recorded and communicated to Accounts?	
In respect of Quantities reduced in the final bill as compared to the running payment, whether adequate reasons have been recorded and communicated to Accounts?	
Whether the Expenditure has been classified correctly according to heads of Account recorded in the sanctioned estimate?	
Whether the work has been completed within the estimated cost? If not, what is the percentage of excess over the sanctioned estimate/ administrative approval? In case the excess is beyond the competency of Sr. Engineer, what action has been taken for the obtaining the approval of the authority competent to sanction the excess?	
(a) If the contractor has furnished bank guarantee in lieu of cash security deposit towards proper execution of works and guarantee against defects during the maintenance period, whether the period of currency of the bank guarantee covers the entire maintenance period? (b) If not, whether security deposit has been proposed to be recovered from the final bill?	
Whether all the previous audit objections raised on running Account bills have been settled? If so, cite reference.	
Signature of Engineer in Charge	Signature of Engineer in Charge
Date:	Date:



PS-

MONTHLY PLAN & REVIEW WITH CONTRACTOR

Page 1 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART- A: PLAN/ REVIEW OF WORK FOR THE MONTH OF Date of Plan/ Review.....

SN.	Description of Work	Unit of Measurement	Unit Rate	Planned		Cumulative Shortfall attributable to contractor upto last month (Refer Note 1)		Achieved		Shortfall attributable to BHEL w.r.t Plan (as per Col. 3 of Part-D)		Cumulative Shortfall attributable to Contractor upto & including this month		REMARKS (Reasons for Shortfall attributable to Contractor. Supporting documents to be kept as record.)
				(QTY Planned for the month as per Part –C of last month)										
(a)	(b)	(c)	(d)	A		B		C		D		E=A+B-C-D		
				Phy.	Financial	Phy	Financial	Phy.	Financial	Phy.	Financial	Phy.	Financial	
	Value of Other Items not mentioned above but planned to be executed in this month													
Total					ΣA		ΣB		ΣC		ΣD		ΣE	

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 2 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART- A: Contd.....

Note 1: In addition to the work planned as per Col. 'A', Contractor shall also make full efforts to minimize the 'Cumulative shortfall attributable to contractor upto the month' as mentioned in Col. 'B' by enhancing its resources, so as to achieve the completion of activities as per agreed schedule. In case contractor is not able to execute the entire shortfall, then BHEL 'Engineer in-charge', shall decide the priority of work to be executed and it shall be binding on the contractor.

Note 2: Percentage Shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month = $[(\Sigma E - \Sigma B) / (\Sigma A - \Sigma D)] \times 100$
In case, $(\Sigma E - \Sigma B)$ is negative, then it shall be treated as zero percent."

Note 3: Form 14 should include all items being planned in the current month, and all items against which shortfall was attributable to contractor till previous month. However, for practical reason, if it is not possible to mention some of the items in Form-14 being planned to be executed in this month, then also value of such items shall necessarily be included in calculation of Total Value.

Note 4: In case reason for shortfall attributable to contractor is w.r.t. T&P and Manpower, it should be in conformity with Part B1 and B2.

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 3 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – B-1: PLAN/REVIEW OF DEPLOYMENT OF MAJOR T&Ps FOR THE MONTH OF

Date of Plan/ Review.....

CONTRACTOR'S SCOPE: -

SN.	PLAN				DEPLOYMENT STATUS			
	Major T&P to be deployed as per work planned for the month	QTY	Deployment Period (in days)	Weightage assigned to planned T&P (in fraction such that $\Sigma C = 1$)	Actual Deployed Quantity	Actual Deployment Period (in days)	Weighted T&P Deployed	REMARKS (Works affected due to non-deployment of T&Ps)
		A	B	C	D	E	$F = (C \times D \times E) / (A \times B)$	

Note: In case, $E > B$, it shall be considered as $E = B$. Similarly, in case $D > A$, it shall be considered as $D = A$.
Percentage of T&P Deployed = $\Sigma F \times 100$

BHEL SCOPE: -

SN.	PLAN				DEPLOYMENT STATUS		
	Major T&P to be deployed as per work planned for the month	QTY	Deployment Period (in days)	Actual Deployed Quantity	Actual Deployment Period (in days)	REMARKS (Works affected due to non-deployment of T&Ps)	

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 4 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – B-2: PLAN/ REVIEW OF DEPLOYMENT OF MANPOWER FOR THE MONTH OF

Date of Plan/ Review.....

CONTRACTOR'S SCOPE: -

SN.	Area of Work	Category of Labour	No. of Labour required as per category	Deployment Period (in days)	No. of Labour actually deployed	Actual Deployment Period (in days)	REMARKS (Works affected due to non-availability of labour)
			A	B	C	D	

Percentage of Manpower Deployed= $100 \times \frac{\sum(C \times D)}{\sum(A \times B)}$

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 5 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – C: PLAN(PHYSICAL) FOR THE NEXT MONTH i.e.

Date of Plan

SN.	Description of work	Original Planned Quantity	Planned Quantity (excluding shortfalls attributable to contractor till date)	Unit of Measurement	T&Ps Required				Manpower Required		REMARKS (Reasons for difference in Original Planned Quantity w.r.t. Planned quantity to be given)
					Contractor Scope		BHEL Scope		Category of Labour	No. of Labour required as per Category	
					Major T&P to be deployed as per work planned for the month	Quantity	Major T&P to be deployed as per work planned for the month	Quantity			

Note 1: Planned quantity should be based on available/ expected fronts/ inputs in the next month

Note 2: “Original Planned Quantity” shall be as per latest jointly agreed programme between BHEL and Contractor before commencement of work or at the time of latest Time Extension, as the case may be.

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 6 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – D: REASONS FOR SHORTFALL ATTRIBUTABLE TO BHEL IN RESPECT OF PLAN FOR THE MONTH.....

SN.	Description of Work (from Part-A)	Quantities Affected		Reasons for Shortfall attributable to BHEL	Agency responsible for reasons for Shortfall	Remarks (Supporting Documents in respect of agency responsible)
		(Physical Quantity)	Unit of Measu- rement			
1	2	3	4	5	6	7

Note1: Reasons for shortfall shall include non-availability of fronts/ drawings/ materials/ T&P (BHEL Scope)/ clearances etc. and other hindrances for which contractor is not responsible.

Note2: Agency responsible may be BHEL Site/ MUs/ Design Centre/ BHEL Customer/ other Contractors etc.

BHEL
(Sign with name, designation and date)

BANK GUARANTEE FOR PERFORMANCE SECURITY

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ hereinafter referred to as the 'Contractor/Supplier', which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref No.....dated ² valued at Rs.....² (Rupees -----)for <Nature of Work>³ (hereinafter called the 'Contract') and the Contractor having agreed to provide a Contract Performance Guarantee, equivalent to% (.... Percent) of the said value of the Contract to the Employer for the faithful performance of the Contract,

we, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby, irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount Rs ----- (Rupees -----)⁴ without any demur, immediately on a demand from the Employer, .

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment thereunder and the contractors/supplier shall have no claim against us for making such payment.

We the bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We BANK further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER.

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.

2. In Case of Bank Guarantees submitted by Foreign Vendors-

- a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.

- b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
- b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
- b.2** **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
- b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
- b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

**BANK GUARANTEE FOR SECURITY DEPOSIT CUM PERFORMANCE BANK GUARANTEE
BOND**

B.G. NO.

Date

This deed of Guarantee made this ----- day of -----two thousand ---- by <Name and Address of Bank> hereinafter called the "The Guarantor" (which expression shall unless repugnant to the context or meaning thereof be deemed to include its successors and assigns) in favour of M/s Bharat Heavy Electrical Limited (A Govt. of India Undertaking) a company incorporated under the Companies Act, 1956, having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its unit at <Address of Power Sector Region¹> hereinafter called "The Company" (which expression shall unless repugnant to the context or meaning thereof be deemed to include its successors and assigns)

WHEREAS < Contractor's Name and Address> (hereinafter referred to as the Contractor) have entered into a contract arising out of Letter of Intent no. < LOI REF & Date > (hereinafter referred to as "the contract") for < Name of Work > with the company.

AND WHEREAS the contract inter-alia provides that the contractor shall furnish to the company a sum of Rs.----- (Rupees-----) towards security deposit for due and faithful performance of the contract in the form and manner specified therein.

AND WHEREAS the contractor has approached the Guarantor and in consideration of the arrangement arrived at between the contractor and the Guarantor, the Guarantor has agreed to give the Guarantee as hereinafter mentioned in favour of the company.

The Guarantor do hereby guarantee to the company the due and faithful performance, observance or discharge of the Contract by the contractor and further unconditionally and irrevocably undertake to pay to the Company without demur and merely on a demand, to the extent of Rs.----- (Rupees-----) against any claim by the company on them for any loss, damage, costs, charges and expenses caused to or suffered by the company by reasons of the contractor making any default in the performance, observance or discharge of the terms, conditions, stipulations or undertakings or any of them as contained in the contract.

The decision of the company whether any default has occurred or has been committed by the contractor in the performance, observance or discharge of any of the terms, conditions, stipulations or undertakings or any one of them as contained in the contract and / or as to the extent of loss, damage, costs, charges and expenses caused to or suffered by the company by reason of the contractor making any default in the performance, observance or discharge of any of the terms, conditions, stipulations or undertakings or any one of them shall be conclusive and binding on the Guarantor irrespective of the fact whether the contractor admits or denies the default or questions the correctness of any demand made by the company in any Court, Tribunal or Arbitration proceedings or before any other Authority.

The company shall have the fullest liberty without affecting in any way the liability of the Guarantor under this Guarantee, from time to time to vary any of the terms and conditions of the contract or extend time of performance by the contractor or to postpone for any time and from time to time any of the powers exercisable by it against the contractor and either enforce or forebear from enforcing any of the terms and conditions governing the contract or securities available to the company and the Guarantor shall not be released from its liability under these presents by any exercise by the company of the liberty with reference to the matters aforesaid or by reasons of time being given to the contractor or any other forbearance, act or commission on the part of the company or any indulgence by the company to the contractor or any other matter or thing whatsoever which under the law relating to sureties would, but for this provision have the effect of so releasing the Guarantor from its liability under this guarantee.

The Guarantor further agrees that the Guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the contract and its claim satisfied or discharged and till the company certifies that the terms and conditions of the contract have been fully and properly carried out by the contractor and accordingly discharges this Guarantee, subject however, that the company shall have no claim under this Guarantee after ----- i.e. (3 months more than the present date of validity of Bank Guarantee unless the date of validity of this Bank Guarantee is further extended from time to time, as the case may be) unless a notice of the claim under this Guarantee has been served on the Guarantor before the expiry of the said period in which case the same shall be enforceable against the Guarantor notwithstanding the fact that the same is enforced after the expiry of the said period.

**BANK GUARANTEE FOR SECURITY DEPOSIT CUM PERFORMANCE BANK GUARANTEE
BOND**

The Guarantor undertakes not to revoke this Guarantee during the period it is in force except with the previous consent of the Company in writing and agrees that any liquidation or winding up or insolvency or dissolution or any change in the constitution of the contractor or the Guarantor shall not discharge the Guarantor's liability hereunder.

It shall not be necessary for the company to proceed against the contractor before proceeding against the Guarantor and the Guarantee herein contained shall be enforceable against them notwithstanding any security which the Company may have obtained or obtain from the Contractor shall at the time when proceedings are taken against the Guarantor hereunder be outstanding or unrealized.

Notwithstanding anything contained herein before, our liability under the Guarantee is restricted to Rs.-----
- (Rupees-----). Our guarantee shall remain in force until -----, i.e. (the present date of validity of Bank Guarantee unless the date of validity of this Bank Guarantee is further extended from time to time) unless a claim or demand under this guarantee is made against us on or before ----- (3 Months more than the validity date) we shall be discharged from our liabilities under this Guarantee thereafter.

Any claim or dispute arising under the terms of this documents shall only be enforced or settled in the courts of at < **Name of place²** > only.

The Guarantor hereby declares that it has power to execute this guarantee and the executant has full powers to do so on behalf of the Guarantor.

IN WITNESS whereof the ----- (Bank) has hereunto set and subscribed its hand the day, month and year first, above written.

(Name of the Bank)

Signed for and on behalf of the Bank
(Designation of the Authorized Person Signing the Guarantee)

(Signatory No.-----)

DATED:

SEAL

Notes :

1. **Address of Power Sector Regions (inviting the Tender)** is as below:
 - PSNR : Bharat Heavy Electricals Limited, Power Sector Northern Region, HRDI & PSNR Complex, Plot No 25, Sector 16-A, Noida – 201 301 (Uttar Pradesh)
 - PSER : Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700 091
 - PSWR: Bharat Heavy Electricals Limited, Power Sector Western Region, Shree Mohini Complex, 345 Kingsway, Nagpur 440 001
 - PSSR: Bharat Heavy Electricals Limited, Power Sector Southern Region, 690, Anna Salai, Nandanam, Chennai 600 035
2. **Name of place (for jurisdiction of Courts)** is as below:
 - PSNR : Delhi
 - PSER : Kolkata
 - PSWR: Nagpur
 - PSSR : Chennai
3. The BG shall be executed on non-judicial stamp papers of adequate value procured in the name of the Bank in the State where the Bank is located.
4. The BG is required to be sent by the executing Bank directly to BHEL at the address where tender is submitted / accepted under sealed cover.

BANK GUARANTEE FOR RELEASE OF AMOUNTS WITHHELD/LIQUIDATED DAMAGES AMOUNT

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited ¹(hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) incorporated under the having its registered office at _____ ¹(hereinafter referred to as the 'Contractor', which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref No.....dated ²valued at Rs.....(Rupees -----) for <Nature of Work>³(hereinafter called the 'Contract')

The Contractor as per Contract should have completed the work/ supplies under the contract by.....(date). As per terms and conditions of the Contract, the Employer is entitled to levy Liquidated Damages (LD) for delays and the Employer has withheld an amount of Rs by way of LD as per the Contract. Now, on the request of the Contractor, the Employer having agreed to release the amount of Rs.....withheld from the Contractor's invoices as Liquidated damages under the terms and conditions of the Contract on production of a Bank Guarantee for Rs. _____ (Rupees.....only) ⁴

We, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount of Rs ----- (Rupees -----) without any demur, merely on a demand from the Employer

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment thereunder and the contractors/supplier shall have no claim against us for making such payment.

We the bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We BANK further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's/ Supplier's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, ... Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER.

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ *DATE OF EXPIRY OF CLAIM PERIOD*

⁷ *BG AMOUNT IN FIGURES AND WORDS.*

⁸ *VALIDITY DATE*

⁹ *DATE OF EXPIRY OF CLAIM PERIOD*

Note:

- 1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.**
- 2. In Case of Bank Guarantees submitted by Foreign Vendors-**
 - a. From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2** In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

BANK GUARANTEE FOR SUPPLY FREE ISSUE MATERIAL.

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier).having its registered office at _____¹ (hereinafter referred to as the 'Contractor/Supplier/Fabricator' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref. No.....dated ² valued at Rs.....(Rupees -----) for <Nature of Work>³ (hereinafter called the 'Contract')

and, the Employer having agreed as per the terms and conditions of the Contract to supply free issue material costing Rs._____ for the manufacture/fabrication of the equipment at the Contractor's site on on furnishing a Bank Guarantee for Rs._____ (Rupees.....)⁴ in the manner hereinafter specified for the due safeguard of the free issue material,

we, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount of Rs ----- (Rupees -----) without any demur, merely on a demand from the Employer, .

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Contractors/Supplier shall have no claim against us for making such payment.

We the Bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor/Supplier/ Fabricator and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's/Supplier's/ Fabricator's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/ Supplier/ Fabricator but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER .

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.
2. In Case of Bank Guarantees submitted by Foreign Vendors-
 - a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2 **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3 The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4 The BG should clearly specify that the demand or other document can be presented in electronic form.

PROFORMA OF BANK GUARANTEE FOR EARNEST MONEY
(On non-Judicial paper of appropriate value)

Bank Guarantee No.....

Date.....

To

(Employer's Name and Address)

.....

Dear Sirs,

In accordance with the terms and conditions of your Invitation for Bids/Notice Inviting Tender No.....¹(Tender Conditions) M/s. having its registered office at ² (hereinafter referred to as the '**Tenderer**'), is submitting its bid for the work of..... for.....³. at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091.⁴(name of the Employer)

The Tender Conditions provide that the **Tenderer** shall pay a sum of Rs as Earnest Money Deposit in the form therein mentioned. The form of payment of Earnest Money Deposit includes Bank Guarantee executed by a Scheduled Bank.

In lieu of the stipulations contained in the aforesaid Tender Conditions that an irrevocable and unconditional Bank Guarantee against Earnest Money Deposit for an amount of ⁵ is required to be submitted by the Tenderer as a condition precedent for participation in the said Tender and the Tenderer having approached us for giving the said Guarantee,,

we, the[Name & address of the Bank] having our Head Office at(hereinafter referred to as the Bank) being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer without any demur, merely on your first demand any sum or sums of Rs. ⁵(*).....without any reservation, protest, and recourse and without the beneficiary needing to prove or demonstrate reasons for its such demand. Any such demand made by the 'Employer' shall be

conclusive and binding on us irrespective of any dispute or difference raised by the Tenderer.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Tenderer shall have no claim against us for making such payment.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Tender or to extend the time of submission of bids from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Tenderer and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Tenderer or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Tenderer or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Tenderer and notwithstanding any security or other guarantee that the Employer may have in relation to the Tenderer's liabilities.

This Guarantee shall be irrevocable and shall remain in force upto and including.....⁶ and shall be extended from time to time for such period as may be desired by the Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Tenderer but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms hereof. However, unless a demand or claim under this Guarantee is made on us in writing on or before the ⁷ we shall be discharged from all liabilities under this Guarantee.

We, ... Bank lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....5.....
- b) This Guarantee shall be valid up to 6
- c) Unless the Bank is served a written claim or demand on or before _____⁷ all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

For and on behalf of

(Name of the Bank)

Date.....

Place of Issue.....

¹ *Details of the Invitation to Bid/Notice Inviting Tender*

² *Name and Address of the Tenderer*

³ *Details of the Work*

⁴ *Name and Address of BHEL Unit/Division/Region (Already filled up)*

⁵ *BG Amount in words and Figures*

⁶ *Validity Date*

⁷ *Date of Expiry of Claim Period*

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date. As per Works Policy, the Bank Guarantee shall be valid for at least six months.

2. In Case of Bank Guarantees submitted by Foreign Vendors-

- a. From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
- b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**

 - b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter-Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2** **In case, Foreign Vendors intend to provide BG from** Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

Form for getting payment through RTGS (Real Time Gross Settlement)

01. Name of Vendor **BHARAT HEAVY ELECTRICALS LTD.**
02. Address **~~BHEL~~ BHEL HOUSE, SIRI FORT, N. DELHI**
03. Vendors Bank A/c Name **BHARAT HEAVY ELECTRICALS LTD.**
04. Vendors Bank A/c No. **11107800029**
05. Name of Bank **STATE BANK OF INDIA**
06. Name of Branch **COMMERCIAL BR., SALT LAKE, SECTOR-V**
07. Branch Phone No. **KOLKATA**
08. City **033-23575666**
09. IFSC Code of the Branch **KOLKATA**
SBIN 0004289

The charges if any for payment through RTGS may be recovered from the Bill submitted by us.

Signature of Authorized Representative of Vendor
के. के. कोआरी / K. K. Coari
उप महाप्रबंधक (वित्त) / Dy. General Manager (Fin)
बी. एच. ई. एल. : पी.एस.ई.आर : कोलकाता - 700 091
BHEL: PSER / Kolkata-700 091

Confirmation by Banker
with office seal

Note : Incorrect information will create Accounting complications and payment will be delayed

TENDER NO: PSER:SCT:NKP-C1999:19

VOLUME -IF

TECHNICAL CONDITIONS OF CONTRACT
(TCC)

FOR

BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF
3X660 MW NORTH KARANPURA STPP, JHARKHAND.

BHARAT HEAVY ELECTRICALS LIMITED

(A GOVT. OF INDIA UNDERTAKING)

POWER SECTOR – EASTERN REGION

PLOT NO. – 9 / 1, DJ – BLOCK,

SECTOR – II, KARUNAMOYEE,

SALT LAKE CITY,

KOLKATA – 700091.

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 1 OF 29

CONTENT

CLAUSE NO	DESCRIPTION
1.0	PROJECT SYNOPSIS AND GENERAL INFORMATION
2.0	SITE VISIT
3.0	SCOPE OF WORK
4.0	DEVIATIONS/CLARIFICATIONS
5.0	DEWATERING
6.0	LAND
7.0	WATER
8.0	ELECTRICITY
9.0	CONSUMABLE
10.0	TEST CERTIFICATES
11.0	IMTE
12.0	QUALITY CONTROL & QUALITY ASSURANCE
13.0	DELETED
14.0	PROJECT MANAGEMENT/ CONSTRUCTION MANAGEMENT
15.0	TEST CERTIFICATE FOR T&P
16.0	T&P TO BE PROVIDED BY BHEL
17.0	MATERIAL HANDLING (BHEL ISSUED MATERIAL)
18.0	ISSUE OF MATERIALS
19.0	RETURN OF MATERIALS
20.0	CEMENT AND STEEL CONSUMPTION AND WASTAGE
21.0	RECONCILIATION OF BHEL ISSUED MATERIALS
22.0	RECOVERY OF MATERIAL
23.0	CONSTRUCTION OF TEMPORARY OFFICE, STORES ETC
24.0	TOOLS & PLANTS (TO BE PROVIDED BY CONTRACTOR)
25.0	CIVIL LABORATORY
26.0	CONSTRUCTION SCHEDULE
27.0	COMPLETION PERIOD
28.0	CERTIFICATE TOWARDS COMPLETION
29.0	EXTENSION OF TIME FOR COMPLETION
30.0	MOBILIZATION ADVANCE/ INTEREST BEARING RECOVERABLE ADVANCE
31.0	SECURITY DEPOSIT & PERFORMANCE BOND
32.0	REVISION ON ACCEPTED CONTRACT RATE
33.0	LIQUIDATED DAMAGE/PENALTY
34.0	CONTRACT PRICE
35.0	TAXES AND DUTIES
36.0	INTERIM PAYMENTS
37.0	PRICE VARIATION CLAUSE
38.0	OVER RUN CHARGES
39.0	METHOD OF MEASUREMENT
40.0	EXTRA/ ADDITIONAL ITEMS OF WORK
41.0	OTHER TERMS
42.0	DELETED
43.0	DELETED
44.0	INSURANCE
45.0	GUARANTEE
	ANNEXURE A
	Note: List of tentatively approved suppliers

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 2 OF 29

These Technical conditions shall be construed as part of tender document and shall be read along with General Conditions of Contract. In case of any conflict or inconsistency between the general and these special conditions, the same shall be brought out by the bidder in writing to BHEL for clarification during pre-bid discussions; failing which most stringent interpretation / clause in favour of BHEL shall be adopted and the same shall be binding to the contractor.

All the tender clauses are individually applicable for respective package unless specifically mentioned separately/differently, as applicable.

CLAUSE NO	DESCRIPTION
1.0	PROJECT SYNOPSIS AND GENERAL INFORMATION
	Name of the Owner : NTPC Capacity : 3 x 660 MW Nearest Railway Station : Khalari Railway Station on Ranchi Garhwa section of Eastern Railways (40 km from Project site) Nearest Town : Tandwa in Chatra District Nearest commercial airport : Ranchi (150 km from Project site) The site is located near Tandwa town having latitude and longitude of about 23° 50' N to 23° 52' N and 84° 59' E to 85° 2' E respectively. It is essential that the bidder visit site and acquaint with the conditions prevailing at site before submission of the bid. The information given herein is for general guidance and shall not be contractually binding on BHEL.
2.0	SITE VISIT
	Contractor should visit 3x660 MW North Karanpura Super Thermal Power Plant project site, to acquaint himself with the conditions prevailing at site and in and around the plant premises, together with all the statutory, obligatory, mandatory requirements of various authorities before submission of the bid.
3.0	SCOPE OF WORK
3.1	Balance works of Civil and Architectural works etc. of BTG area for unit # 1 & 3 {includes Power House, Boiler & Auxilliary Boiler, ACWPH, Mill-Bunker, ESP, Transformer Yard, BFP foundation, Fan Foundation, Mill Foundation, Duct Support Foundation, Paving, Pipe & Cable rack, ESP Control Room & DG Shed, Approach road to buildings, respectively for each unit} for 3x660 MW North Karanpura STPP, Jharkhand.
3.2	Mix design(M 15, M 20, M 25 ,M 30, M 35/M 40) for all concreting shall be carried out either at site or from a reputed institute, contractor has to ensure adding of admixture and minimizing of cement content in line with IS 456 as advised by BHEL time to time without any additional cost.
3.3	The work to be performed under this specification consists of providing all labour, materials, consumables, equipment, temporary works, temporary storage sheds for contractors own use, temporary colony for labour and staff, temporary site offices, constructional plant's transportation/handling and all incidental items not shown or specified but reasonably implied or necessary for the completion of subject scope, all in strict accordance with the specifications including revisions and amendments thereto as may be required during the execution of work.
3.4	The scope shall also include setting up by the bidder a testing laboratory (one AC lab size 4.5mtr x 6mtr and 1 non AC lab 4.5 mtr x 4.5 mtr.) in the field to carry out all relevant tests OR vendor may conduct all required test from any customer approved Laboratory established at site NKSTPP by others Civil Vendor considering accepted by our Customer.

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 3 OF 29

	Detail of laboratory equipments as per Annexure-A is to be arranged by the contractor within quoted rate in the case of establishment of Laboratory by his own.
3.5	All quality standards, tolerances, welding standards & other technical requirements shall be strictly adhered to. The Bidder shall fully apprise himself of the prevailing conditions at the proposed site, climatic conditions including monsoon pattern, soil conditions, local conditions and site specific parameters and shall include for all such conditions and contingent measures in the bid, including those which may not have been specifically brought out in the specifications.
3.6	All works under this specification, unless specified otherwise, shall conform to the latest revision and/or replacement of the following or any other Indian Standard Specifications and Codes of Practice. In case any particular aspect of work is not covered specifically by Indian Standard Specification, any other standard practice as may be specified by the Engineer shall be followed. Specific reference for pre cast – prestressed works may be taken from the following : • SP:7 National Building Code - Structural Design (Part 6/Sec.7) Prefabrication and system building and mixed / composite construction. • IS: 10297 Code of practice for design and construction of floors and roofs using precast reinforced/prestressed concrete ribbed or cored slab units.
3.7	The Contractor is to carry out the work as per the drawings issued to him and/or Contractor's drawings which are approved by the Engineer and/or the Engineer's instructions.
4.0	DEVIATIONS/CLARIFICATIONS The bidder is required to submit with his offer in the relevant schedule/ format without any ambiguity. Any assumptions, presumptions, deviations etc. indicated or implied anywhere by the bidder except those indicated in the deviation schedule/ format will not be recognized and will not form a part of consideration / offer. In the absence of such filled-up schedule/ format it will be understood and agreed that the bidder's offer is based on strict conformance to the specification and no negotiation would be allowed in this regard. BHEL reserve the right not to recognize any / all deviations submitted after opening of the bid.
5.0	DEWATERING Contractor shall ensure at all times that his work area & approach/ access roads are free from accumulation of water, so that the materials are safe and the erection/ progress schedule are not affected. No separate claim in this regard shall be admitted by BHEL. No separate payments for dewatering of subsoil, surface water or catchments water, if required, at any time during execution of the work including monsoon period shall be considered by BHEL.
6.0	LAND
6.1	The contractor has to plan and use the existing land inside the Project Premise considering the use of land by other Civil /mechanical/ electrical contractors and the storage of plant machineries and materials. The existing land shall be shared by all erections agencies. Land will be allocated with certain time frame and to the extent available/ considered necessary, and will be reviewed by BHEL depending upon the area availability.
6.2	Land for labour colony near Project Premise may be provided free of cost if the same is available from owner/customer. The contractor shall construct labour colony/ hutment as per his requirements after obtaining approval of formalities from statutory body. Further, contractor must ensure minimum HSE norms and hygienic sanitary conditions in his labour colony.
6.3	The contractor will be responsible for handing back all lands, as handed over to him by BHEL/NTPC.
6.4	Area within plant premises for fabrication, batching plant, office, storage area etc. for construction purpose shall be provided as per availability free of cost as per approval of customer.
7.0	WATER
7.1	BHEL will provide construction water at two points, within 500 m from given work premises, free of cost to the contractor.
7.2	Further necessary network for construction & drinking water system shall be done by the

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 4 OF 29

	bidder at his own cost.
7.3	Contractor should arrange on their own, drinking water in their labour colony.
7.4	BHEL shall not be responsible for any inconvenience or delay caused due to any interruption of water supply and the contractor shall claim no compensation for delay in work for such interruption. Contractor may make standby arrangement for water for which no separate payment shall be made by BHEL.
7.5	Contractor will have to arrange for storage of water to meet the day-to-day requirement. Bidder will ensure adequate supply of construction water to meet the requirement of water during major concreting.
7.6	The availability of water (construction as well as drinking) in North Karanpura project may be limited. Contractor shall ensure that no water is wasted. In this regard the contractor shall take all necessary measure towards preservation of water.
8.0	ELECTRICITY
8.1	CONSTRUCTION POWER & GENERAL ILLUMINATION NETWORK: - BHEL Shall Provide Construction Power free of charge at 415V level at two points (within 500 M from his workplace), bidder has to make his own distribution arrangement to draw electricity. The bidder will have to Procure & install illumination system during construction right from start of his work though BHEL has established general illumination system at project areas. Vendor has to make arrangement for temporary lights at different floors/working areas for execution of the work & safety of workmen till the permanent illumination system is established, within the quoted rate. The illumination should be such that minimum illumination requirement as specified by Indian standards for general illumination is maintained. GENERAL:- If any other voltage level (other than normally available) is required, the same shall be arranged by the contractor from power supply as above. Contractor will have to provide at his own cost necessary calibrated energy meters (tamper proof, suitably housed in a weather proof box with lock & key arrangement) at point of power supply along with calibration certificate from authorized / accredited agency for working out the power consumption. In case of recalibration required for any reason the necessary charges including replacement by calibrated meters is to be borne by the contractor. Supply of electricity shall be governed by Indian Electricity Act and Installation Rules and other Rules and Regulation as applicable. The contractor shall ensure usage of electricity in an efficient manner and the same may be audited by BHEL time to time. In case of any major deviation from normally accepted norms is observed, BHEL will reserve the right to impose penalty as deemed fit for such cases.
8.2	The bidder shall have to provide earth leakage circuit breaker at each point wherever human operated electrical drives/ T&Ps are deployed.
8.3	The power supply will be from the available grid. BHEL shall not be responsible for any inconvenience or delay caused due to any interruption of power supply/ variation in voltage level and no compensation for delay in work can be claimed by the contractor due to such non-supply on the grounds of idle labour, machinery or any other grounds.
8.4	Bidder will have to arrange sufficient illumination at their own work areas.
8.5	The contractor should ensure that the work in critical areas is not held up in the event of power breakdown. In the event of breakdown in the electric supply, if the progress of work is hampered, it will be the responsibility of the contractor to step up the progress of work after restoration of electric supply so that overall progress of work is not affected.
8.6	The contractor shall have to make arrangement at their own cost for illumination that will be required in the working area for execution of the work & safety of workmen.
8.7	The contractor shall have to make arrangement at their own cost for illumination etc in labor colony. However there may be provision of Chargeable Power for labor colony for which contractor has to install meters and necessary accessories

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 5 OF 29

9.0	CONSUMABLE
9.1	All consumables, like gas, electrodes, chemicals, lubricants etc. required for the scope of work, shall be arranged by the contractor at his cost from approved brand/make unless otherwise specifically mentioned in the contract.
9.2	All consumables to be used for the job shall have to be approved by NTPC/ BHEL prior to use.
9.3	In the event of failure of contractor to bring necessary and sufficient consumables, BHEL may arrange for the same at the risk and cost of the contractor. The entire cost towards this along-with overhead shall be paid by the contractor or deducted from the contractor's bills.
10.0	TEST CERTIFICATES
	Necessary test certificates of all materials supplied by contractor are to be produced to BHEL prior to use of those materials as mentioned in the approved FQP or customer requirement. Vendor should procure materials from BIS certified vendors if it is mentioned in the approved FQP otherwise the prior approval is to be required from our customer NTPC.
11.0	IMTE
	The contractor shall ensure deployment of reliable and calibrated instrument, measuring, and test Equipment (IMTE). The IMTE shall have test calibration certificate from authorized / Govt approved agencies. The contractor shall also keep provision of alternate engagement for such IMTE so that the work does not suffer when a particular IMTE is sent for calibration. Re-testing/ re-calibration shall also be arranged by the contractor at their own cost at regular interval during the period of use as advised by BHEL.
12.0	QUALITY CONTROL & QUALITY ASSURANCE
	Contractor's Engineers and supervisors shall be adequately qualified and also inclined to do a quality job. The quality assurance Engineer shall co-ordinate all aspects of quality control, inspection, implementation of quality assurance procedures laid down in Quality Plan and technical specification by BHEL. He shall fill up quality assurance log sheets / formats and submit to BHEL for joint inspection and acceptance. The contractor shall fill up, maintain & preserve the quality records in computerized media. NTPC/BHEL's authorized representative shall be given free access at all time to such quality related records etc. for inspection, review etc. Vendor should follow the approved FQP for execution of all activity. In case of no clarity in FQP, vendor should accept the joint decision of BHEL/NTPC.
13.0	DELETED
14.0	PROJECT MANAGEMENT/ CONSTRUCTION MANAGEMENT
	To meet the need of construction management at site, contractor shall provide the following services within quoted/ accepted rates.
14.1	PLANNING & MONITORING
14.1.1	The bidder shall prepare detail construction schedule (L-3) as per completion dates given in this document. This schedule must include all milestone and key activities for each subsystems/ components in the areas of engineering (wherever applicable), procurement, manufacture (wherever applicable), excavation/ construction/ erection. This network must conform to the overall project schedule. The bidder should also ensure monitoring of these activities at least weekly basis to start with and on daily basis whenever required by BHEL.
14.1.2	The bidder shall also prepare progress report indicating progress on key activities, management summary for critical activities, list of actions requiring attention of BHEL. This schedule is to be preferably made in PRIMAVERA/MS PROJECTS, so that the same is compatible with BHEL's project management software.
14.1.3	The bidder will have to install 01 No.PC (multimedia PC work station Pentium- core-i5-650, 3.2 GHZ or above, 320 GB HDD, 4 GB RAM, 100/1000 MBPS LAN card) of HCL/ COMPAQ/ ZENITH or equivalent make with window 7 (professional) 64 bit (with roll back to 32 bit O/S and required software like MS Office 2007 Professional or higher, PageMaker (7.0 etc), ADOBE PDF CREATOR with one no laser jet printer compatible for A3 size printing (ink/ cartridge for which to be supplied as and when required), one(1) no colour laser jet printer compatible for A4 size printing (ink/ cartridge for which to be supplied as and when required) with power backup at places, as per instruction of BHEL for exclusive use of BHEL.

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 6 OF 29

	These computer/ printers shall remain contractor's property and they will be allowed to take out the same after completion of work in all respect till submission of Final Bill to HQ Kolkata. The contractor shall provide data / information etc in prescribed formats for periodical updating of the progress reports, material management reports, updating of network pertaining to the contractor's scope of work etc. The bidder shall also provide One number computer operator and 02(two) numbers service staff for miscellaneous service for BHEL's use at site/ Kolkata for reconciliation, progress review & day-to-day planning purpose, documentation etc. These facilities are to be provided within 30 days from LOI date till completion of work in all respect with submission of Final Bill to HQ Kolkata. If contractor fails to provide computer / printer / personnel as per requirement, for a continuous period of fifteen days or more, BHEL shall have the right to deduct the amount as per following rates on prorata basis, from contractor's RA bill or any other dues.
14.1.3.1	@ Rs 15,000/- (Fifteen thousand)/ month for each computer operator. Or at actuals (rate +30%) if BHEL arranges this facility, whichever is lower.
14.1.3.2	@ Rs 15,000/- (Fifteen thousand) / month for each service staff. Or at actuals (rate +30%) if BHEL arranges this facility, whichever is lower.
14.1.3.3	@ Rs 15,000/- (Fifteen thousand)/ month for each set of computer & printer. Or at actuals (rate +30%) if BHEL arranges this facility, whichever is lower.
14.1.3.4	In the event of the contract period getting extended beyond the stipulated time for reasons not attributable to you, above services may either be withdrawn or retained as per instruction of BHEL. If services are retained, you will be reimbursed at the above mentioned rate or (actual +15%), whichever is lower, if the services of operator / service staff are being used by BHEL.
14.1.4	The contractor's site office must have facilities of communications like Fax, E-mail, and telephone with STD facility within a month from LOI.
14.2	PROGRESS REPORTING
14.2.1	The bidder shall submit daily, weekly and monthly progress reports for work force, materials reports, consumables (gases/electrodes) report and other reports as per pro-forma considered necessary by BHEL. In case of any failure on contractor's part to comply with this, BHEL may at its discretion, consider to withhold part payment against their RA bills.
14.2.2	The progress report shall indicate the progress achieved against planned with reasons indicating delays, if any, and shall give the remedial actions which the contractor intends to take to make good the slippage or lost time, so that further works again proceed as per the original program and the slippages do not accumulate and effect the overall program.
14.2.3	The daily work force reports shall clearly indicate the work force deployed, category-wise specifying also the activities in which they are engaged.
14.2.4	Weekly progress review meetings will be held at site during which actual progress during the week vis-à-vis scheduled program shall be discussed or actions to be taken for achieving targets. For discussions, the contractor shall present program of subsequent week. The contractor shall constantly update/revise his work program to meet the overall requirement.
14.2.5	Periodic progress reviews on the entire activities of execution in respect of supply and works in scope of bidder will be held once in a month at Calcutta/site. These meetings will be attended by reasonably higher officials of the contractor and will be used as a forum for discussing all areas where progress needs to be speeded up. The contractor shall be further responsible for ensuring that suitable steps are taken to meet various targets decided upon such meetings.
14.2.6	During construction contractor shall take an average forty colour digital photograph / slides each month (not less than nine per week) of the works during progress. In case of failure in providing such photograph in each month, an amount of Rs. 20,000/- per month shall be deducted from contractor's RA bill.
14.2.7	Successful bidder has to provide for electronic/ computerized storing and re-production/

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 7 OF 29

	printing/ plotting of various data, log sheets, protocols, measurements etc. These may be stored in CD (as per requirement) and handed over to BHEL as per requirement.	
14.3	SITE ORGANIZATION	
14.3.1	The contractor shall maintain a site organization of adequate strength in respect of manpower, construction machinery and other implements at all time for smooth execution of the contract headed by a competent construction manager for site operations with sufficient level of authority to take site decisions. The vendor will submit organization chart (showing the name of SITE-IN-CHARGE) with individual bio-data indicating various levels of experts to be posted for supervision in the fields of supervision and execution, quality, material management, planning, safety, etc. The organization shall be reinforced from time to time, as required to make up slippage (if any) from the schedule without any commercial implication to BHEL. The organization chart is to be submitted within 10 days from the date of LOI.	
14.3.2	Following (minimum) engineering manpower with power plant construction background to be deployed at site by the successful vendor for their day to day supervision etc.	
14.3.2.1.1	Qualified safety officers with assistant (exclusive for safety supervision for project jobs).	Officer – One no Assistant - One no
14.3.2.1.2	Engineer & Supervisors for quality inspection.	One No Engineer One supervisor
14.3.2.1.3	Site supervising engineer and supervisors for all type of works -area.	Two no Engineer Four no supervisors
14.3.2.1.4	Planning Engineer (exclusively for planning)	One no. Engineer
14.3.3	Deputation of above man-power shall be jointly decided at site in line with construction schedule.	
14.3.4	Engineer/ supervisor for other functions like store & purchase, material management, fin, admn etc are to be provided as per site requirement and not considered above.	
14.3.5	In the event of non deputation of engineer/ supervisor by the bidder as per above agreed schedule, BHEL shall reserve the right to deduct Rs 50,000.00 per man-month for engineer, Rs 35,000.00 per man-month for the supervisor/ safety officer/chemist and Rs. 30,000 per man-month for safety supervisor from RA bills. Further induction of manpower regarding site supervisor & site engineer will be decided at site as per requirement without any financial implication.	
14.3.6	BHEL reserves the right to reject or approve the list of personnel proposed by the contractor. The persons whose bio-data have been approved by BHEL will have to be posted at site and deviation in this regard will not be permitted unless specific & reasonable justification is made.	
14.3.7	In addition to above, a well experienced qualified engineer to be designated, as 'Project Co-coordinator', shall be deployed by the contractor. Such engineer shall have adequate exposure on the job and shall remain fully involved in all planning activities, guidance etc to contractor's own team during the complete execution period of contract.	
14.3.8	The contractor should also submit to BHEL for approval a list of T&Ps along with their fitness certificates. The tools & tackles shall not be removed from site without written permission of BHEL.	
14.3.9	The contractor should also submit network programs for the erection of various items. These networks shall show the NTPC/ BHEL hold points, which have to be cleared by NTPC/ BHEL, or their authorized representatives before further erection can take place. These programs for the erection would clearly identify responsibilities of the contractor and NTPC/ BHEL. It is the responsibility of the contractor to get the Networks approved by BHEL within four weeks of the date of finalization of award of work/ placement of LOI.	
14.4	CONSTRUCTION MANAGEMENT	
14.4.1	Based on the approved program, the contractor shall submit a program of construction/ erection/ commissioning for the implementation. These programs would be amplified showing start of erection and subsequent activities and shall form the basis for site execution and detail monitoring. The three monthly rolling program with the first month's program being tentative based on the site condition would be prepared based on these programs. The contractor shall also be involved along with NTPC / BHEL to tie up detailed	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 8 OF 29

	resources mobilization plan over the period of the contract matching with the performance targets.
14.4.2	The program would be jointly finalized by the site in-charge of the contractor with BHEL/ NTPC's project coordinator as well as the site-planning representative. The erection program will also identify sequential events matching financial turnover.
14.4.3	The contractor is liable to furnish all documentary evidences towards payment of Works Contract Tax as and when required by BHEL.
14.5	HEALTH SAFETY & ENVIRONMENT
14.5.1	Vendor has to follow HSE norms at project site during execution of entire contract period and the applicable HSE norms are noted in Tender Document for HSE norms having Document Title: Health, Safety and Environment Plan for Site Operation by Subcontractors
14.5.2	Round the clock experienced paramedical personnel with first aid facility at site to be arranged by the contractor at his own cost within 30 days of LOI or start of construction activity, whichever is earlier.
15.0	TEST CERTIFICATE FOR T&P
	All T&P, lifting tackles and pulling devices to be deployed by the contractor must bear valid / latest test certificates (issued by competent authority) for their suitability, and the documents shall be preserved at site.
16.0	T&P TO BE PROVIDED BY BHEL
16.1	In the event of BHEL issued T&P, measuring instruments etc. the contractor and BHEL shall maintain joint protocol about the condition of all T&P, instruments etc. taken from BHEL's custody and return to BHEL after use. The contractor shall not use this equipment for purposes other than the scope of work given in this tender document. It is the responsibility of contractor to keep these equipments always in working condition and ensure their safe return in working condition to BHEL's store subject to normal wear & tear.
16.2	After use of T&P items issued by BHEL the same shall be returned to BHEL in good working condition subject to normal wear & tear failing which recoveries at the book value of the item or the market rate prevailing at the time of returning the items, whichever is higher shall be made from the payments due to the contractor from BHEL from this contract or from any other contract.
16.3	For any other T&Ps except Free Issue as depending upon the availability, BHEL / BHEL's Customer handling equipment and other plants may be made available to the contractor on payment of higher charges as fixed, subject to the conditions laid down by BHEL/Customer from time to time. Unless paid in advance, such hire charges, if applicable shall be recovered from contractor's bill /security deposit or any other payment in one installment.
17.0	MATERIAL HANDLING (BHEL ISSUED MATERIAL)
17.1	Cement, reinforcement (TMT bar) earthing MS rod, structural steel (MS plate/ ISMB/ channel/ angle/ chequered plate/ stainless steel plate/liner) only will be issued free of cost by BHEL for use in the work covered in this contract. All other materials required for proper completion of job shall be provided by contractor and quoted rates shall be inclusive of this.
17.2	Consignment of cement & steel will be directly issued to the contractor as received by BHEL, on weighment basis from its supplier, as per delivery challan of supplier.
17.3	Handling of steel and cement of total project including its unloading will be in vendor's scope for which no separate payment will be given by BHEL.
17.4	It would be the responsibility of the contractor to keep in constant contact with BHEL/ site to find out the delivery status, arrival of the consignments and arrange for escort to accompany the truck/ trailer for transportation of above materials by BHEL'S supplier, as necessary. The lorry, truck way bill for the consignment as shall be received by BHEL would be handed over to the contractor immediately for unloading of materials including all arrangement for necessary gate passes etc. All arrangement for necessary gate passes etc shall be the responsibility of contractor.
17.5	Payment of all demurrages that may result due to contractor's fault/ delay would be the responsibility of the contractor. If BHEL have to make payment of demurrage together with freight, the amount so paid as demurrages for the reasons stated above, shall be recovered from the bills of the contractor. The decision of BHEL's engineer in this regard

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 9 OF 29

	will be final and binding on the contractor. However the contractor has to clear all such charges, if any in this regard and complete the job without waiting for BHEL's decision.
17.6	It would be the responsibility of the contractor to sign on the delivery book acknowledgement slip of supplier/ transport authorities etc.
17.7	Consignments coming on Sundays and holidays are also required to be handled/ unloaded by the contractor. Since the offices and stores will probably remain closed on such days, it will be the responsibility of the contractor to contact BHEL engineers at their residence and obtain instructions.
17.8	Since the consignments are expected to arrive during any time of the day or night, contractor shall have, his workmen round the clock at site as well as other places as required to unload the materials immediately on arrival.
17.9	Unloading of materials at the storage yard or at places designated by BHEL, stacking & restacking, shifting & reshifting, using contractor's own cranes, trailers and other equipments with the valid road permit for their operation, unloading and stacking etc shall be responsibility of the contractor under this contract. All materials/equipments shall be stacked, stored above ground level by use of concrete or wooden sleepers. No materials shall remain on ground at any time. All concrete sleepers required for stacking the materials shall be arranged by contractor (successful bidder of this package). All other material handling equipments like winches, d-shackles, slings of various sizes, max puller, pulley blocks, jacks, trucks, tailors etc required for such material handling of steel, cements etc shall be arranged by contractor within quoted/accepted rates.
17.10	It will be the responsibility of the contractor to submit computerized account of all such consignments of materials received by them, daily to BHEL.
17.11	BHEL reserve the right to recover from the contractor any loss arising out of damage/ theft or any other causes of the materials issued to him at any point.
17.12	Open land (very limited space) for storage shall be provided by BHEL on free of cost basis. You shall maintain one centralized fenced store cum bar bending yard (Area to be provided by BHEL). Hard surfacing of this yard and all round drain shall be carried out by you at your own cost within the accepted rate. Batching plant area shall be provided within plant premises and you shall make use of the area for installation and operation of the Batching Plant at your own cost. You may procure Ready-Mix concrete from existing agency from their approved Batching Plant with permission from BHEL/NTPC and relevant test report shall be produce to BHEL/NTPC satisfied by BHEL/NTPC engineer. You shall make complete arrangement of necessary security personnel, to safeguard all such materials in your custody. Materials issued will be used only for construction of permanent work. You shall take care of material issued by BHEL and shall protect the same from theft, damage and weathering. Contractor shall also remove grass, bushes, trees etc. wherever required off the land provided to him and shall make proper continuous up-keepment of the open yard/ land by removing grass, bushes trees etc and same is included under the scope of his work & no extra payment shall be made to the contractor in this regard.
17.13	The contractor shall construct waterproof cement store (capacity minimum 500 MT) for storing and stacking of cement, CGI/ asbestos roofing (slope) with brick masonry wall, PCC flooring. Materials required for the same shall be provided by contractor at his own cost. Cement has to be kept over wooden raised platform. Stacking of cement is to be done as per IS codes with proper illumination and locking arrangements.
17.14	The contractor shall in no case be entitled for any compensation or damages on account of any delay in supply or non-supply thereof for all or any such material.
17.15	Clotting of cement and excessive rusting of steel must be avoided. In case, due to any cause attributable to the contractor, such clotting of and/ or rusting of steel occur rendering the same unusable, then such quantity of cement/ steel shall be recovered from the interim payment at the penal rate specified in the tender.
17.16	No material shall be issued to the contractor except as those indicated above, i.e. cement

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 10 OF 29

	and steel unless otherwise expressly provided for in the contract. Contractor will have to make his own arrangement at his own cost for procurement of any other material as required for the works and of such quality as acceptable to BHEL.
17.17	The contractor shall maintain proper store account for all the BHEL issued materials and shall give three copies of monthly computerised reconciliation statement of such account to the BHEL.
17.18	Contractor shall carry out in complete association with BHEL, material management functions and execution like day to day update of materials, issued to contractor, accounting for surplus/ scrap material returned etc. These functions shall also be carried out through computerised system utilizing suitable software. Contractor shall provide experienced software personnel to associate on dedicated basis for efficient discharge of the same.
17.19	The contractor shall solely be responsible for the safety & quality of material after it is handed over and issued to contractor by BHEL.
17.20	BHEL issued materials shall not under any circumstances be taken out of the project site unless otherwise permitted by BHEL.
17.21	All the necessary lifting tackles, cranes, hydra, tools & plants including tractors, trailers, trucks, pulley blocks, jacks, winches, wire ropes etc, of suitable capacities and other equipments incidental to carry out this work shall have to be arranged by the contractor at his cost. BHEL engineer reserves the right to inspect lifting tackles and equipment before allowing their use. Such approval however shall not relieve the responsibility of the contractor to ensure safe handling of equipment taking the precautions to avoid any accident and damage to other equipment and personnel.
17.22	No separate rate will be applicable for the above job. The contractor will quote the rate for the items inclusive of all charges for the above job.
17.23	Bidder's scope of handling of steel under the scope of this tender includes stacking/ storing of materials over concrete sleepers. Bidder scope shall include provision of concrete sleepers for this purpose and no separate payment against the same will be made by BHEL. After completion of the job bidder shall take back the sleepers. Bidder's quoted rate/ price shall be in consideration to this.
18.0	ISSUE OF MATERIALS
18.1	ISSUE OF CEMENT
18.1.1	Cement as received from the manufacturer/ stockiest will be issued free of cost to the contractor. The theoretical weight of each bag of cement for issued purposes will be considered as 50 kg, the contractor shall be accountable for the cement issued to him on this notional weight only. No claim whatsoever will be entertained because of difference between theoretical and actual weight of the bags of cement.
18.1.2	The empty cement bags duly accounted for against issue shall be the property of the bidder and the same shall be disposed by the bidder as per statutory regulation prevailing in the project.
18.2	ISSUE OF STEEL
18.2.1	The steel shall be issued to the contractor free of cost on the following basis.
18.2.1.1	Structural steel (MS plate, angle, channel, ISMB, Stainless steel plate/Liner, chequered plate and EOT crane rails) – Weighment basis (unit – MT).
18.2.1.2	Reinforcement steel (TMT) and earthing rod (MS round) – Weighment basis (unit – MT).
18.2.2	All the steel (structural steel, reinforcement, earthing MS rod) issued by BHEL shall be properly accounted for. The total quantity of steel required for the work will be calculated from the approved Bar Bending schedule, fabrication drawings, approved laps, chairs and lugs. The measurement for payment as well as for accounting shall be based on the sectional weights as indicated in the following IS specifications. IS: 808-1989 - Beams, channels and angles IS: 1730-1961 - Plates Reinforcements - Fe-500 confirming to IS: 1786. or grade-1 of IS:432 (part-I)
18.2.3	In case any such sectional weights are not available in the above documents, the manufacturer recommendation shall be binding.
18.2.4	The steel issued to the contractor shall be mainly in standard length and sections as received from the supplier. However, the contractor shall be bound to accept the steel in length as available in the project stores no claims for extra payment because of issue of

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 11 OF 29

	non-standard length will be entertained.
18.2.5	In case MS flats as required in the fabrication of structures are not available, you shall cut such width out of the available MS plates to make flats at no extra cost till such material is available and procured by BHEL.
18.3	The contractor shall satisfy himself of the quality and quantity of the materials at the time of taking delivery from BHEL stores. No claims whatsoever will be entertained by BHEL because of quality or quantity after the materials are taken by contractor from BHEL stores.
18.4	Quarterly requirement of steel and cement must be positively submitted by the contractor at the last month of the previous quarter, However, The contractor shall submit to the engineer, a statement indicating estimated quantity of cement and steel required at least two months in advance . In addition, the contractor shall also furnish the estimated requirement of cement and steel during a month by the third week of the previous month indicating his requirement.
18.5	Bidders to ensure that no lamination materials are taken over by them from BHEL. Fabrication wastage, if any due to above, shall not be compensated by BHEL
18.6	Bidder to note that all fasteners like MS/ HT/ HSFG bolts/ nuts, lock nuts, washers etc shall be supplied by the contractor as per applicable item of Price Schedule.
18.7	Bidder to note that cement and steel required for his enabling job like store/ site office etc shall be arranged at his own cost. All TG staging material shall be arranged by contractor at his own cost. Bidder shall do the design for its structure immediately after receipt of TG deck drawing and obtain approval from BHEL.
19.0	RETURN OF MATERIALS
19.1	RETURN OF CEMENT
19.1.1	Sealed cement bags remaining unused and in perfectly good condition at the time of completion or termination of the contract shall be returned promptly, (within 15 days from assessment) if BHEL/ engineer is satisfied of the physical condition of the cement. Return of such cement to the project stores/ place as identified within the project area by engineer/ BHEL will not be entitled to handling and incidental charges. Surplus sealed and good conditioned cement bags will be taken back on weighment basis.
19.2	RETURN OF STEEL INCLUDING SCRAP
19.2.1	All surplus steel and all wastage materials will be taken back on weighment basis.
19.2.2	Surplus, unused and un-tampered steel shall be sorted section-wise and returned separately for a place directed by BHEL/ engineer within the project area. Return of such materials will not be entitled to any handling and incidental charges.
19.2.3	All wastage/ scrap (including wastage, unusable scrap) shall be returned to the stores on weighment basis and a receipt obtained for material accounting purposes. Return of such material will not be entitled to any additional cost due to handling and transportation and incidental charge.
19.2.4	Scrap for reinforcement steel and structural steel shall be returned separately
20.0	CEMENT AND STEEL CONSUMPTION AND WASTAGE
20.1	CEMENT CONSUMPTION
20.1.1	The theoretical consumption of cement shall be based on the following.
20.1.1.1	For design mix concrete as per approved design mix.
20.1.1.2	For nominal mix concrete work, as per minimum cement as specified or as approved by Engineer-in-charge.
20.1.2	For item of works, where volume mix is permitted in writing by the BHEL, for masonry works, plaster other miscellaneous items, the cement consumption shall be governed by the "Statement of Cement Consumption" attached to Delhi schedule of Rates of CPWD-DSR-2013 unless otherwise specified in the specifications or the drawing of contract or mutually agreed by Engineer-in-charge and contractor.
20.1.3	Actual consumption = Issue – Surplus/ unused quantity of cement returned in good condition by contractor to store. (No sweep cement will be taken back by BHEL).
20.2	CEMENT WASTAGE
20.2.1	Allowable wastage – One and half (+1.5%) of theoretical consumption of cement unless specified otherwise in the technical specification.
20.2.2	For any material issued by BHEL to the contractor free of cost, and which is not accounted for by the contractor to BHEL, then recovery for such material shall be affected

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 12 OF 29

	at penal rates.		
20.2.3	Sl no	Cement consumption	Basis of issue & penal recovery
	C-1	Theoretical consumption (without considering any wastage or loss).	Free
	C-2	Actual consumption being Limited to plus one and half percent (+1.5%) of aforesaid theoretical consumption towards allowable wastage.	Free
	C-3	Actual consumption beyond one and half percent (+1.5%) of above (C-1).	Penal rate
20.3	REINFORCEMENT STEEL & EARTHING MS ROUND CONSUMPTION		
20.3.1	The theoretical consumption of various diameters of reinforcement and earthing MS round shall be based on approved construction drawing and bar bending schedule. Weight shall be calculated considering the sectional weights as per Indian standards. No extra cost shall be payable to the contractor for any deviation in weights for the different procedures adopted for issue and calculation of the theoretical consumption including rolling tolerances.		
20.3.2	Actual consumption = Issue – Surplus.		
20.3.3	Surplus = Un-tampered and unused quantity of steel returned by the contractor to BHEL store along-with relevant documents. However, cutpieces of length greater than or equal to 5.0 m in good condition as per judgement of the engineer will also be treated as surplus steel.		
20.3.4	Wastage = Actual consumption – Theoretical consumption.		
20.4	REINFORCEMENT STEEL & EARTHING MS ROUND WASTAGE		
20.4.1	Allowable wastage – Three Percent (+3%) of the theoretical consumption shall be considered as allowable wastage.		
20.4.2	Wastage and scrap shall be as per actual weightment basis.		
20.4.3	Sl no	Reinforcement steel & earthing rod 40 mm ms round	Basis of issue & penal recovery
	R-1	Theoretical consumption (without considering wastage and scrap or loss)	Free
	R-2	Wastage limited to plus three percent (+3%) of aforesaid theoretical consumption (R-1) towards allowable wastage.	Free
	R-3	Wastage beyond three percent (+3%) of the theoretical consumption above (R-1).	Penal rate
20.5	STRUCTURAL STEEL CONSUMPTION		
20.5.1	The theoretical consumption of various sections shall be based on approved drawings. Weights shall be calculated considering the sectional weights as per Indian standard as mentioned in relevant clause. No extra shall be payable to the contractor for any deviation in weights for the two different procedures adopted for issue and calculation of the theoretical consumption including rolling tolerances.		
20.5.2	Actual consumption = Issue – Surplus.		
20.5.3	Surplus = Untempered, unused, uncut quantity of steel returned by the contractor to BHEL store.		
20.5.4	Wastage = Actual consumption – Theoretical consumption.		
20.6	STRUCTURAL STEEL WASTAGE		
20.6.1	Allowable wastage – 4 % (four percent) of the theoretical consumption shall be considered. Wastage is further classified as cut pieces and scrap measured as per actual weightment basis. Invisible wastage (loss of materials due to gas cutting, straightening of edges etc) shall be limited to 0.5 % (zero point five percent) of theoretical consumption and shall be considered for reconciliation purposes only. But this invisible wastage shall be considered to be included in allowable wastage (i.e. four percent).		
20.6.2	Sl no	Structural steel materials	Basis of issue & penal recovery
	S-1	Theoretical consumption (without considering any wastage, scrap or loss) as per specification & drg.	Free
	S-2	Wastage limited to plus four percent (+4%) of the aforesaid theoretical consumption (S-1) towards allowable wastage.	Free

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 13 OF 29

	S-3	Wastage beyond four percent (4%) of the aforesaid theoretical consumption (S-1).	Penal rate
20.7	All wastage reinforcement, MS round (for earthing), structural steel shall be returned to BHEL.		
21.0	RECONCILIATION OF BHEL ISSUED MATERIALS		
21.1	The contractor shall submit a reconciliation statement of cement and steel issued to him once in two months. The same may be submitted along with each RA bill.		
21.2	At the time of submission of bills, the contractor shall properly account for the material issued to him as specified herein to the satisfaction of BHEL certifying that the balance material are available with contractor's custody at site.		
21.3	If it is noticed by BHEL that the wastage is high and calls recovery at the penal rate, then BHEL will proceed for recovery for the excess wastage as per penal recovery rates as specified.		
21.4	The approved drawings/ bar bending schedules are to be considered for the purpose of reconciliation of materials.		
22.0	RECOVERY OF MATERIAL		
22.1	If wastage exceeds the specified limit, the recovery of excess wastage shall be made from monthly RA bill at the penal rate stipulated below.		
22.2	PENAL RATE OF MATERIALS		
	Item	Penal rate (Rs)	
22.2.1	Cement (OPC/ PPC/ PSC).	7,500/- per MT.	
22.2.2	Reinforcement steel and earthing rod etc.	58,000/- per MT.	
22.2.3	Stainless steel plate / Liner	6,00,000/- per MT	
22.2.4	Structural steel materials	70,000/- per MT.	
23.0	CONSTRUCTION OF TEMPORARY OFFICE, STORES ETC		
23.1	The contractor shall arrange at his own cost cleaning of area allotted, construction of his temporary office, stores, cement godown etc. and also the watch and ward of all the above. Materials required for the same shall be provided by contractor at his own cost.		
24.0	TOOLS & PLANTS (TO BE PROVIDED BY CONTRACTOR)		
24.1	Tentative list of T&P to be deployed by contractor for successful completion of work is detailed below.		
24.2	It may be noted that the list is not exhaustive and is only for general guidance. The contractor is required to provide all necessary T&P (other than those specified to be provided by BHEL, if any) measuring (calibrated) instruments & handing equipments to maintain work progress for timely completion of total work as per contract. In case of project requirement, some activities may have to pre-pone. In such cases the contractor may have to deploy additional T&P. Quoted rate shall be inclusive of such emerging requirements. However, contractor shall submit deployment plan of all T&P along with tender bid.		
24.3	In the event of any failure on the part of the contractor to deploy T & P to sustain desired work progress, BHEL may at his discretion also terminate the contract on this ground and take out any or whole amount of the contract from the scope of the contractor. In the event of failure of contractor to deploy necessary and sufficient T&P/ IMTEs to maintain work progress, BHEL will be at liberty to arrange the same at the risk & cost of contractor including transportation cost of same from any of BHEL site/ other agency & charges as applicable shall be deducted from contractor's RA bill. Decision of BHEL in this regard will be final & binding on contractor.		
24.4A	Following Major T&Ps to be arranged by contractor within the time schedule as indicated below-		
	Major T&P items	Broad Mobilizing time from date of start of work	
24.4A.1	01 no. hydra (10/ 12 T cap)	As per site requirement	
24.4A.2	1 nos. submerged arch welding machine	As per site requirement.	
24.4A.3	01 no. trailor – 15T	As per requirement	
24.4A.4	Sufficient quantity of steel ladders for approach up to the top of each erected column to be required during erection of columns.	As per site requirement.	
24.4A.5	1 No. jack hammers/pavement breakers.	As per site requirement	
24.4A.6	Power winch – 3T - 01 no.	As per requirement	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 14 OF 29

24.4A.7	1 No. hydraulic excavator / Poclain (one no. with rock breaker attachment)	As per requirement
24.4A.8	01 no. JCB / Pay Loader	As per requirement
24.4A.9	1 no. portable automatic concrete batching plant with printing facility (Output 30 cum/ hr)	As per requirement
24.4A.10	2 nos. transit mixer (4.5/5/6 M3 capacity)	As per requirement
24.4A.11	2 nos. concrete pump (20 cum/ hr min capacity & lift 70M)	1 st - Within 20 days 2 nd –As per requirement
24.4A.12	1 no. Concrete cutting power tools (DD2E of HILTI/BOSCH make)	As per site requirement
24.4A.13	1 no. Concrete core Cutting machine for drilling in concrete upto 300 mm dia alongwith diamond bits	As per site requirement.
24.4A.14	2 nos. self priming dewatering pump 5 HP (diesel/ electric)	Within 30 days.
24.4A.15	One no. 10 HP submersible mono-block electric pump (KOS-1040+ of Kirloskar or equivalent),	Within 60 days. As per requirement
24.4A.16	4 nos. self priming dewatering pump 2 HP (diesel/ electric)	Within 30 days. As per requirement
24.4A.17	2 nos. curing pump – 1.5 /2 HP (pump for curing at heights)	Within 30 days.
24.4A.18	1 no. dozer.	Within 25 days. As per requirement
24.4A.19	2 nos. dumper	5 nos. Within 20 days. Balance within 30 days As per requirement
24.4A.20	2 nos. reinforcement bending machine	Within 20 days.
24.4A.21	2 nos. reinforcement cutting machine	Within 20 days.
24.4A.22	1 nos. power driven earth rammer	Within 60 days.
24.4A.23	1 no. vibromax (earth compactor)	As per requirement
24.4A.24	1 nos. Vibro compactor/ plate compactor – drum width 750mm	Within 90 days
24.4A.25	1 no. compression testing machine (200 T cap)	As per requirement
24.4A.26	Civil laboratory equipments as per list attached in ANNEX `A`with temporary building one AC lab size 4.5mtrx6mtr and 1 non AC lab 4.5 mtrx4.5 mtr	As per requirement
24.4A.27	1 nos. electric winch with building hoist	As per requirement
24.4A.28	1 no total station with adequate arrangement for Surveyors.	Within 30 days.
24.4A.29	1 nos auto level & staff	Within 30 days.
24.4A.30	125 nos concrete cube moulds	Within 30 days.
24.4A.31	One nos drinking water tank – 5000 lit.	Within 30 days.
24.4A.32	1 nos truck mounted water tank (minimum 5000 lit) capacity with sprinkler arrangement.	As per requirement
24.4A.33	1 No. 125KVA Electric Generator	As per requirement
24.4A.34	5 Nos. Concrete vibrator with adequate needle (3Nos. diesel driven +7Nos. electric driven)	5 Nos (at least 2nos. diesel driven) within 30 Days.
24.4A.35	Portable fire extinguishers as below: Soda acid – 02 sets. Dry chemical powder – 02 sets CO2 – 02 sets. Water & sand bucket (4 buckets in one stand) -3 sets.	Within 45 days
24.5	T&P shown in the above mentioned list are tentative based on planned progress requirement. Actual Mobilisation schedule, based on front availability, drawings and material availability at site is to be reviewed and mutually agreed with BHEL site periodically from time to time for mobilisation of major T&Ps, and the same have to be adhered to. No change will be	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 15 OF 29

	permitted without written approval of BHEL site.	
	Further requirement will be reviewed time to time at site and contractor will provide additional T&P / equipments to ensure completion of entire work within schedule time without any financial implication to BHEL. All other T&Ps shall be provided by the contractor without any extra cost to BHEL. Vendor will give advance intimation & certification regarding capacity etc prior to dispatch of heavy equipments.	
24.6	All T&P and all IMTEs, which are required for successful and timely execution of the work covered within the scope of this tender, shall be arranged and provided by the contractor at his own cost in working condition.	
24.7	In the event of non mobilisation of any T&P by the successful bidder and as a result progress of work suffered, BHEL reserves the right to deduct suitable amount from the dues of the bidder, with assigning reasons thereof at the following rates	
	Major T&P items	Recovery rates
24.7.1	Power winch – 3T	Rs. 2000/- per week or part thereof
24.7.2	hydraulic excavator / Poclain	Rs. 50000/- per week or part thereof
24.7.3	JCB / Pay Loader	Rs. 50000/- per week or part thereof
24.7.4	portable automatic concrete batching plant (Output 15 cum/ hr)	Rs. 40000/- per week or part thereof
24.7.5	transit mixer (4.5/5/6 M3 capacity), peak period 4 nos. transit mixer	Rs. 7000/- per week or part thereof
24.7.6	concrete pump (20 cum/ hr min capacity & lift 70M)	Rs. 20000/- per week or part thereof
24.7.7	Concrete cutting power tools (DD2E of HILTI/BOSCH make)	Rs. 5000/- per week or part thereof
24.7.8	Concrete core Cutting machine for drilling in concrete upto 75mm dia alongwith diamond bits	Rs. 5000/- per week or part thereof
24.7.9	self priming dewatering pump 5 HP (diesel/ electric)	Rs. 2000/- per week or part thereof
24.7.10	self priming dewatering pump 2 HP (diesel/ electric)	Rs. 2000/- per week or part thereof
24.7.11	curing pump – 1.5 /2 HP (pump for curing at heights)	Rs. 2000/- per week or part thereof
24.7.12	Dozer	Rs. 40000/- per week or part thereof
24.7.13	Dumper	Rs. 5000/- per week or part thereof
24.7.14	Reinforcement bending machine	Rs. 5000/- per week or part thereof
24.7.15	Reinforcement cutting machine	Rs. 5000/- per week or part thereof
24.7.16	Power driven earth rammer	Rs. 500/- per week or part thereof
24.7.17	Vibromax (earth compacter)	Rs. 40000/- per week or part thereof
24.7.18	Vibro compactor/ plate compactor – drum width 750mm	Rs. 20000/- per week or part thereof
24.7.19	Compression testing machine (200 T cap)	Rs. 4000/- per week or part thereof
24.7.20	Civil laboratory equipments as per list attached in ANNEX `A`with temporary building one AC lab size 4.5mtrx6mtr and 1 non AC lab 4.5 mtrx4.5 mtr	Rs. 500/- per week or part thereof
24.7.21	Electric winch with building hoist	Rs. 2000/- per week or part thereof
24.7.22	Total station with adequate arrangement for Surveyors.	Rs. 5000/- per week or part thereof
24.7.23	Auto level & staff + 1 nos if required	Rs. 5000/- per week or part thereof
24.7.24	Drinking water tank – 5000 lit.	Rs. 5000/- per week or part thereof
24.7.25	Concrete vibrator with adequate needle (3 Nos. diesel driven + 6 Nos. electric driven)	Rs. 3000/- per week or part thereof
24.7.26	Any other instrument	As per discretion of the engineer
25.0	CIVIL LABORATORY	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 16 OF 29

	Contractor may establish and maintain civil laboratory with necessary equipment (as per Annexure-A) for conducting relevant tests at site, as required. Otherwise, you may conduct test at our approved existing Laboratory inside plant premises with permission from BHEL/NTPC. Relevant test report shall be produce to BHEL/NTPC and it shall be satisfied by BHEL/NTPC Engineer.
26.0	CONSTRUCTION SCHEDULE
26.1	Entire work shall be carried out in accordance with the broad construction schedule given below, within the stipulated completion period. Within 30 days of LOI, the contractor shall discuss with BHEL site engineer & furnish detail construction schedule (L-3/ L-4) indicating all milestones on the basis of major activities and get it approved from BHEL engineer. This schedule will undergo review and based on progress vis-à-vis project requirement, contractor shall have to submit revised schedule for approval of BHEL.
26.2	Overall completion schedule :- Civil & architectural works of Unit # 1 &3 within 6 months from the date of Start of work at site as certified by BHEL Site Construction Manager. Mobilisation period is 20 days from date of LOI by BHEL.
26.3	Contractor shall establish mix design for all concreting either by taking trial mix at site or from a reputed institution (As per BHEL's approval) or decided by BHEL/NTPC. Contractor shall ensure adding of admixture and minimizing of cement content in line with IS: 456.
26.4	The contractor shall plan his work in such a manner so as to meet the overall project schedule, in consultation with BHEL/ NTPC engineer.
26.5	Contractor shall submit daily progress report and weekly work program based on above construction schedule. Defferement of above schedule is not acceptable. Contractor will adhere to schedule and resource planning to be augmented to ensure completion as per schedule.
26.6	Periodic progress reviews on the entire activities of execution in respect of supply & works in scope of contractor will be held once in a month at Kolkata/ site. These meetings will be attended by reasonably higher officials of the contractor and will be used as a forum for discussing all areas where progress needs to be speeded up. The contractor shall be further responsible for ensuring that suitable steps are taken to meet various targets decided upon such meetings.
26.7	Above schedule is indicative. The contractor shall plan his work in such a manner so as to meet the overall project schedule, in consultation with BHEL/NTPC Engineer.
26.8	Contractor shall submit daily work program based on above construction schedule.
27.0	COMPLETION PERIOD
	Balance Civil & architectural works of Unit # 1 &3 is to be completed within 6 months from the date of Start of work certified by BHEL Site Construction Manager
28.0	CERTIFICATE TOWARDS COMPLETION
	The work under the scope of the contractor shall be deemed to have been completed in all respects only when so certified by BHEL/ NTPC. The decision of BHEL in this regard shall be final and binding on the contractor.
29.0	EXTENSION OF TIME FOR COMPLETION
29.1	If the completion of work as detailed in the scope of work gets delayed beyond the contract/ completion period, the contractor shall request for an extension of the contract and BHEL at its discretion may extend the contract.
29.2	Based on the reviews jointly signed, the works balance at the end of original contract period less the backlog attributable to the contractor shall be quantified, and the number of months of 'Time extension' required for completion of the same shall be jointly worked out. Within this period of 'Time extension', the contractor is bound to complete the portion of backlog attributable to the contractor. Any further 'Time extension' or 'Time extensions' at the end of the previous extension shall be worked out similarly. FORM-14 shall be submitted by vendor in the every month and it shall be verified by site execution team.
29.3	However if any 'Time extension' is granted to the contractor to facilitate continuation of work and completion of contract, due to backlog attributable to the contractor alone, then it shall be without prejudice to the rights of BHEL to impose penalty/ LD for the delays attributable to the contractor, in addition to any other actions BHEL may wish to take at the risk and cost of contractor.
29.4	A joint programme shall be drawn for the balance amount of work to be completed during

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 17 OF 29

	the period of 'Time Extension', along with matching resources to be deployed by the contractor as per specified format. Review of the programme and record of shortfall shall be done.
29.5	During the period of 'Time extension', contractor shall maintain their resources as per mutually agreed program.
29.6	At the end of total work completion as certified by BHEL engineer, and upon analysis of the total delay, the portion of time extensions attributable to (i) Contractor, (ii) Force majeure conditions, and (iii) BHEL, shall be worked out and shall be considered to be exhausted in the same order. The total period of time extensions shall be the sum of (i), (ii) and (iii) above and shall be equal to period between the scheduled date of completion and the actual date of completion of contract. LD shall be imposed/ levied for the portion of time extensions attributable to contractor and recoverable from the dues payable to the contractor.
30.0	MOBILIZATION ADVANCE/ INTEREST BEARING RECOVERABLE ADVANCE
	Not applicable for this tender.
31.0	SECURITY DEPOSIT & PERFORMANCE BOND
31.1	Security deposit shall be applicable as per relevant clause of GCC (Volume-IB).
31.2	Performance bond is not applicable for the tender.
32.0	REVISION ON ACCEPTED CONTRACT RATE
32.1	Not applicable in this tender.
33.0	LIQUIDATED DAMAGES/PENALTY
33.1	If the contractor fails to maintain the required progress of work which results in delay in the completion, as per the contractual completion period BHEL shall have the right to impose Liquidated Damage/Penalty at the rate of 0.25% of the contract value, per week of delay or part thereof subject to a maximum of ceiling specified below. For this purpose, the period of delay shall be the delay attributable to the Contractor for the completion of work as per contract. Contract Value for this purpose, shall be the final executed value exclusive of ORC, Extra Works executed, Supplementary/Additional Items and PVC.
33.2	If Completion of work goes beyond specified contract period, LD will be imposed with maximum LD amount – 5 % of total contract value.
33.3	In case of LD recovery, the applicable GST shall also be recovered from the contractor.
33.4	BHEL shall deduct the amount of such compensation from any money due or which may become due to the contractor and/or recover such compensation from the bank guarantees/ security deposit of the contractor. To be entitled to impose such compensation, BHEL will not be required to prove that he has incurred such amount as actual damage.
33.5	BHEL reserve the right to cancel the order/ contract or a portion thereof at the risk & cost of the contractor and the contractor shall be liable to BHEL for any excess costs thereof.
34.0	CONTRACT PRICE
34.1	The bidder shall quote their rates strictly in accordance with prescribed Price schedule of Volume-III
34.2	The quantities of the various items mentioned in the respective Price schedules, Volume-III are approximate, based on very preliminary information and may vary to any extent or to be deleted altogether. The quoted rates of each item will remain firm throughout the period of execution including extension, for reasons whatsoever, as long as variation in the total value of the work executed under any part of this contract including extra items, if any, but excluding any price variation, remains within +/- 15 % (plus/minus fifteen percent) of the awarded price (as per LOI / WO).
34.3	The unit rate quoted for various items of BOQ shall include all the stipulation mentioned in the tender documents and nothing extra over BOQ rates shall be payable.
35.0	TAXES AND DUTIES
35.1	All taxes excluding GST & BOCW Cess (as specified elsewhere in the tender) but including, Charges, Royalties, any State or Central Levy and other taxes for materials if any obtained for the work and for execution of the contract shall be borne by successful bidder and shall not be payable extra by BHEL. Any increase of above at any stage during execution of contract, including extension of the contract, shall have to be borne by successful bidder contractor. Bidder's quoted/ accepted rates/ price shall be inclusive of all such requirements.

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 18 OF 29

35.2	GST along with Cess (as applicable) legally leviable & payable by successful bidder as per GST Law shall be paid by BHEL, extra. Hence, bidder shall not include GST along with Cess (as applicable) in their quoted rates/ price.
35.3	Successful bidder shall furnish proof of GST registration with GSTN Portal covering the services under this contract. Registration should also bear endorsement for the premises from where the billing shall be done by successful bidder on BHEL for this project / work.
35.4	Since GST on output will be paid by BHEL separately as enumerated above, bidder's your quoted rates / price should be after considering the Input Credit under GST law at bidder's end.
35.5	TDS under Income Tax shall be deducted at prevailing rates on gross invoice value from the running bills (RA bills) unless exemption certificate from the appropriate authority / authorities is furnished.
35.6	TDS under GST (if / as & when applicable later) shall be deducted at applicable rates on gross invoice value from the running bills (RA bills). However, as on date no TDS under GST is applicable.
35.7	Bidder shall note that GST Tax Invoice complying with GST Invoice Rules (Section 31 of GST Act & Rules referred thereunder) wherein the 'Bill To' details shall encompass following. BHEL GSTN – Refer attached GSTN code table of BHEL. Name - BHARAT HEAVY ELECTRICALS LIMITED Address - Shall be intimated later. Specific details of BHEL GSTN, Name and Address as stated above, have been specified elsewhere in the tender.
35.8	Successful bidder to intimate immediately on the day of removal of goods (in case of any supply of goods) to BHEL along with all relevant details and send a scanned copy of Tax Invoice to BHEL through following communication mode for enabling BHEL to meet its GST related compliances. Portal address. and Email address – Shall be intimated later. Specific details of above shall be intimated to successful bidder by BHEL at appropriate juncture.
35.9	In case of delay in submission of above mentioned documents on the date of despatch, BHEL may incur penalty / interest for not adhering to Invoicing Rules under GST Law. The same will be liable to be recovered from successful bidder, in case such delay is not attributable to BHEL.
35.10	In case of raising any Supplementary Tax Invoice (Debit / Credit Note), successful bidder shall issue the same containing all the details as referred to in Section 34 read with Section 31 of GST Act & Rules referred there under.
35.11	Successful bidder shall comply with the Time Limit prescribed under the GST Law and rules thereof for raising of the Tax Invoice. If any supply of goods is applicable, successful bidder shall also ensure prompt delivery of goods after despatch.
35.12	Bidder shall note that in case GST credit is delayed / denied to BHEL due to delayed / non receipt of goods and / or Tax Invoice or expiry of the timeline prescribed in GST Law for availing such ITC, or any other reasons, not attributable to BHEL, GST amount shall be recoverable from successful bidder along with interest levied/ leviable on BHEL, as the case may be.
35.13	Successful bidder shall upload the invoices raised on BHEL in GSTR-1 within the prescribed time as given in the GST Act. Bidder shall note that in case of delay in declaring such invoice in your return and GST credit availed by BHEL is denied or reversed subsequently as per GST Law, GST amount paid by BHEL towards such ITC reversal as per GST law shall be recoverable from the successful bidder along with interest levied / leviable on BHEL.
35.14	Way Bill: Successful bidder to arrange for way bill / e-waybill for any transfer of goods for the execution of the contract. Successful bidder has to make their own arrangement at their cost for completing the formalities, if required, with Issuing Authorities, for bringing materials, plants & machinery at site for execution of the works under this contract, Road Permit / Way Bill, if required, shall be arranged by successful bidder and BHEL will not supply any Road Permit/ Way Bill for this purpose.
35.15	Any new taxes & duties, if imposed subsequent to due date of offer submission as per NIT & TCN, by statutory authority during contract period (including extension, if the same is not attributable to you), shall be reimbursed by BHEL on production of relevant supporting document to the satisfaction of BHEL. However, you shall obtain prior

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 19 OF 29

	approval from BHEL before depositing new taxes and duties.
35.16	Benefits and / or abolition of all existing taxes must be passed on to BHEL against new taxes, if any, proposed to be introduced at a later date
36.0	INTERIM PAYMENTS
36.1	For all items of works, as per the the Price schedule, Vol-III, billing shall be on item rate basis. However, Interim Payment shall be limited to 95% of gross bill amount.
36.2	All admissible recovered/ adjustments etc. shall be made from the interim payable amount.
36.3	Balance 5 % retained from each RA bill will be released on completion of guarantee period subject to confirmation of full GST Credit to BHEL. Any Interest if levied thereon, for reasons elaborated in tax & duties clause of the tender and attributable to you, will be recovered from the Final Payment/ Retention amount. However, this 5 % payment can be released against submission of bank guarantee valid for the guarantee period as stated above in Proforma / Format of performance bank guarantee, subject to receipt of certificate that all works are completed in all respects and confirmation of full GST Credit to BHEL. Submission of bank guarantee towards retention is separate and other bank guarantee(s) cannot be utilized for this purpose. This retention bank guarantee will be refunded after guarantee period.
36.4	1.5 % of gross bill amount shall be paid in the following manner on certification by BHEL engineer after compliance of each of following activity in each month. In case of non-fulfilment of respective activity by vendor in each month, no payment shall be made by BHEL against corresponding activity and no claim of bidder at a later date, whatsoever, in this regard shall be entertained by BHEL.
36.4.1	0.7 % shall be paid on compliance of housekeeping of vendor's working area and store/ office areas.
36.4.2	0.3 % shall be paid on compliance of general illumination of vendor's working area and stores, office area.
36.4.3	0.2 % shall be paid on compliance of applicable OHSAS requirement as per guidelines of BHEL/ PSER and as specified in the tender.
36.4.4	0.3 % shall be paid on compliance of applicable safety requirement as per guidelines of BHEL/ PSER and as specified in the tender.
36.5	Contractor's RA bill with all supporting documents, complete & correct in all respects, certified by BHEL engineer, shall be paid within 45 days – 60 days of receipt of bill.
36.6	BHEL site at its discretion, may further split up the above percentages of break up and effect payment to suit the site condition, cash flow requirement, according to the progress of work.
36.7	Such payment as above shall be effected only on certification by BHEL against completion of each stage.
36.8	Applicable GST, which can be claimed at any point, shall be released to you upon compliance of following:
36.8.1	You declaring such Invoice in your GSTR-1
36.8.2	Receipt of Goods / services and Tax Invoice by BHEL
36.8.3	Confirmation of payment of GST thereon by you on GSTN Portal
36.8.4	Above is subject to receipt of goods/ service and tax invoice thereof along with vendor declaring invoice in their return and paying GST within timeline prescribed for availing ITC by BHEL.
37.0	PRICE VARIATION CLAUSE(PVC)
37.1	Price variation (PVC) shall be applicable as per GCC
38.0	OVER RUN CHARGES(ORC)
	Not applicable for this tender.
39.0	METHOD OF MEASUREMENT
	Mode of measurement shall be as per relevant clauses of technical specification of this tender. In case the same is not available the relevant IS 1200 in conjunction of IS code 3385 shall be adopted. In case the same is also not available, the standard procedure adopted in CPWD (latest edition) shall be adopted. In case the same is also not available in CPWD, the measurement of the work done will be based on the mutual agreement between BHEL and contractor. In all the above cases, the interpretation of BHEL will be

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 20 OF 29

	final and binding to the contractor.
40.0	EXTRA/ ADDITIONAL ITEMS OF WORK
	It shall be as per relevant clause of GCC.
41.0	OTHER TERMS
41.1	Contractor shall provide temporary barricade all round the working area to avoid any untoward incident.
41.2	Any other non-conformity noticed not listed above will also be fined. The decision of BHEL engineer is final on the above. The amount will be deducted from bills of the contractor.
41.3	The contractor shall comply with all state and central laws, various labour laws, statutory rules and regulations, etc.
41.4	The payment of wages act, minimum wages act, workman compensation act, Employers Liability act, Industrial Dispute Act, Employees Provident Fund Scheme, Employees State Insurance, Contract Labour (Regulation and abolition) Act and other acts, rules & regulation for labour as may be enacted by the Government during the tenure of the contract and having force or jurisdiction at site. The contractor shall give to the local government body police and other relevant authorities all such notices as may be required by law.
41.5	All other term & conditions of this specification shall be governed by the pertinent provisions of GCC and other volumes of this tender, as applicable.
41.6	While bidder's scope include deployment of all resources, like T&P, materials, consumables, manpower including supervision etc for proper completion of the subject job and no sub-contracting for execution of the job is allowed by BHEL. Depending on project's requirement and on prior acceptance of BHEL, bidder may associate agencies for deployment of skilled/ unskilled manpower only for site execution. Bidder should arrange all resources, like T&P, materials, consumables, supervision etc directly for the subject job.
41.7	Drawing showing enough details for the construction as per the specification shall be furnished to the contractor in a phased manner as far as possible.
42.0	DELETED
43.0	DELETED
44.0	INSURANCE
44.1	BHEL shall arrange comprehensive MCE (marine cum erection) Insurance Policy for total project supply & services including balance of plant package covering transit risks & loss, destruction or damage during handling at site, storage, civil works, erection, testing and commissioning/ completion up to trial operation completion of each unit including theft, sabotage, fire, lightning and other natural calamities.
44.2	Contractor shall timely intimate despatches to the underwriter. The name of the underwriter and Policy No. shall be intimated in due course of time.
44.3	The contractor shall be responsible for timely submission of loss/damage/theft to the underwriter, assistance in lodging & settlement of claim for losses/ damages/ theft/ lodging of FIR with police. Any consequential loss arising out of non-compliance of this stipulation will be borne by contractor.
44.4	It is the entire responsibility of the contractor to insure his workmen against accident and injury while at work as required by the relevant rules and to pay compensation, if any, to their workmen as per workmen's compensation act. The contractor has also to insure his staff against accident/injury. The contractor has to take insurance cover for his tools and plants, assets etc.
44.5	These insurance covers have to be taken prior to start of work at project and he shall make available the policy to BHEL site-in-charge for necessary verification before commencement of work. However, irrespective of such verification/ acceptance, the sole responsibility to maintain adequate insurance cover for his workmen, T&P, assets etc at all times during the period of contract shall lie with the contractor. Regarding the aforesaid insurance cover, the contractor shall directly deal with the Insurance Company for all matters regarding the insurance in his scope.
44.6	The contractor will take necessary precautions/ due care to protect the material at Project site, while in his custody from any damage/loss till the same is handed over to BHEL/ NTPC at project site. For lodging/ processing of insurance claim the contractor will submit

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 21 OF 29

	necessary documents. BHEL will reserve the right to recover the loss from the contractor as detailed below in case the damage/loss is due to negligence/carelessness on the part of the contractor. In case of theft of material under contractor's custody, the same shall be reported to police by the contractor immediately and copy of FIR and subsequently police investigation report shall be submitted to BHEL/ NTPC for taking up with insurance. However this will not relieve the contractor of his contractual obligation for the materials in his custody.
44.7	It will be responsibility of the contractor to replenish the items lost/ damaged in time without hampering the schedule of work and without waiting for settlement of insurance claim. Amount received from the underwriters on settlement of insurance claim shall be passed on to the contractor as and when available.
44.8	In case the claim is summarily rejected by the underwriters due to WILFUL NEGLIGENCE of the contractor and contractor's failure to replenish the items lost/ damaged, the entire cost of repair/replacement will be recovered from the contractor.
44.9	Other conditions of Insurance shall be as per relevant clause of GCC.
45.0	GUARANTEE
45.1	Guarantee period shall be 12 months from the date start of guarantee period as per relevant clause of GCC. Commencement of guarantee period shall be from the date completion of work under the contract as certified by BHEL

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 22 OF 29

ANNEXURE- A
LIST OF EQUIPMENTS FOR CIVIL SITE LABORATORY

CONCRETE TESTING EQUIPMENT				
SL NO.	NAME OF TEST	NAME OF EQUIPMENT	SIZE OF EQUIPMENT	IS REF.
1	Initial & final setting time, Consistency of cement	Vicat Apparatus with desk pot	Standard	IS 5513
2	Shrinkage of cement, Auto Clave Test	Le Chatelier's apparatus Auto Clave Equipment	Standard	IS 5514
3	Abrasion value test	Los Angles Abrasion testing machine	Standard	IS 2386
4	Aggregate Impact value test	Aggregate Impact value testing machine with blow counter	Standard	IS 9377
5	Aggregate crushing value test	Crushing value apparatus	Standard	IS 2386
6	Flakiness index	Thickness gauge for measuring flakiness index	Standard	IS 2386
7	Elongation Index	Elongation guage	Standard	IS 2386
8	Bulk density, voids and bulking apparatus	Measuring cylinders	3, 5,10 & 15 liters cylinders	
9	Concrete Compressive test	Digital Compressive Testing Machine with 2000 KN capacity.	2000KN capacity	IS 2505
10	Cement motor cube casting	Mortor Cube mould	70.6 x 70.6 x 70.6 mm, minimum 06 sets desired.	IS 10086
11	Concrete Cube casting	Concrete Cube Mould	150x150x150mm, minimum 20 sets desired considering TG Raft major concreting activity.	IS 10086
12	Workability of concrete	Slump cone	Standard, atleast 04 nos	IS 456
13	Specific gravity of aggregates	Pycnometer	Standard, atleast 02 nos	IS 383
14	Cement mortor cube vibrating	Motorised vibration machine for cement testing	Standard	IS 4031
15	Course aggregate Sieve analysis (Concrete & Road Works)	Sieve set	450mm dia GI Frames Size: 125 mm, 90 mm, 75 mm, 63 mm, 53 mm, 40 mm, 20 mm, 16 mm, 12.5 mm, 10 mm, 4.75 mm, Pan and cover	IS 383
16	Fine aggregate sieve analysis	Sieve set	200 mm dia Brass sieves; Size 4.75 mm, 2.36 mm, 1.18 mm 600 micron, 300 micron, 150 micron, 75 micron, 75 micron, Pan and cover	IS 383
17	Seive Shaker	Motorised Sieve shaker	Mfg. Catalogue	
18	Silt content check	Sand silt content beaker	Standard	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 23 OF 29

19	Ultrasonic pulse velocity test	UPV appratus for concrete	Standard	

Soil Testing Equipment (Levelling & Grading)				
1	Liquid limit test	Liquid limit apparatus	Standard	IS 2720
2	Core Cutter test	core cutter apparatus	Rammer, 6 nos of std core cutter mould, dolly	IS 2720
3	Proctor density test	Std proctor Compaction apparatus	Standard	IS 2720
4	Moisture Content	Rapid moisture meter	Standard, atleast 04 nos	IS 2720

Process Control Accessories				
1	Hot air oven	Temperature range 50° C to 300° C	600x600x600mm (min.size)	
2	Electronic balance	3 nos	600gx0.01g, 10g and 50 kg	
3	Physical balance	5 kg capacity	Weights upto 5 kg	
4	Thermometer	Temperature range 0° C to 150° C	Digital	
5	Poker Thermometer (Concrete Road)	Temperature range 0° C to 50° C & 150° C	02 nos each required	
6	Measuring jars	2 nos set of each size	100ml, 200ml, 500ml & 1000 ml	
7	Gauging trowlers	4 nos	100mm & 200 mm with wooden handle	
8	Spatula	2 nos each size	100mm & 200 mm with long blade wooden handle	
9	Stainless steel scoop	2 nos each	2 kg and 5 kg	
10	Vernier calipers	2 nos each	12" and 6" Sizes	
11	Digital pH meter	01 nos	.01 mm least count	
12	Digital micrometer	01 nos	0.01 mm least count	
13	Digital paint thickness meter for steel	02 nos	500 micron Range	
14	GI tray	02 nos each	600x450x50mm, 450x300x40mm, 300x250x40mm	
15	Electric mortar mixer	01 nos	0.25 CUM capacity	
16	Rebound hammer test	01 nos	Digital Rebound hammer	IS 13311
17	Screw Gauge	02 nos	0.1 mm-10mm, Least count 0.05	
18	Digital paint thickness meter for masanory/concrete painting measurement	02 nos	150 micron range	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 24 OF 29

NOTE:

LIST OF TENTATIVELY APPROVED SUPPLIERS/DESIGNERS IS PROVIDED HEREUNDER. HOWEVER, IN CASE THE BIDDER PROPOSES TO PROCURE ITEMS FROM OTHER SUPPLIERS, SPECIFIC APPROVAL SHALL BE REQUIRED TO BE TAKEN FROM BHEL/NTPC AS PER APPROVED QP. FURTHER BIDDER MAY NOTE THAT LIST CONSISTS OF ONLY TENTATIVELY APPROVED VENDORS. SPECIFIC APPROVAL MUST BE TAKEN FROM BHEL/NTPC PRIOR TO EXECUTION AT SITE.

SL. NO.	ITEM	PROPOSED SUB SUPPLIER	PLACE OF MANUFACTURING	REMARKS
1	CONSTRUCTION CHEMICALS - ADMIXTURES, PLASTISIZERS, RETARDERS WATER PROOFING COMPOUNDS GROUTS	SIKA INDIA LTO	-	
		CICO TECHONOLOGIES LTD	-	
		FOSROC CHEMICALS (I) PVT LTD	-	
		BASF	-	
2.	FALSE CEILING- GLASS REINFORCED GYPSUM SYSTEM, MINERAL FIBRE BOARD SYSTEM,PREPAINTED COIL COATED STEEL SYSTEM	SAINT GOBAIN	NEW DELHI	
		HUNTER DOUGLOUS	MUMBAI	
		TIGER STEEL	PUNE/MUMBAI	
		INTERARCH	NOIDA	
		LLOYD INSULATION	-	
		MG INDUSTRIES	FARIDABAD	
		ARM STRONG	NEW DELHI	
3	PAINT AND PAINTING SYSTEM	BERGER	-	
		SHALIMAR PAINTS	-	
		JENSON AND NICHOLSON	-	
		KANSAI NEROLAC	-	
		AKZO NOBEL	-	
		ASIAN PAINTS	-	
4	COLOUR COATED SHEET (FOR COIL)	UNION STEEL	KOREA	
		DONGBU STEEL	KOREA	
		BHUSHAN STEEL AND STRIPS LTD.	RAIGAD	
		ESSAR STEEL LTD	PUNE	
		NATIONAL STEEL AND AGRO	DHAR	
		JSW STEEL COATED PRODUCTS LTD	KAMLESHWAR	Formerly JSW ISPAT Steel Ltd
		BHUSHAN STEEL LTD.	SAHIBABAD	
		JSW LTD	THANE	
		TATA BLUESCOPE STEEL LTD	JAMSHEDPUR	*AL-ZN COIL FOR CLADDING

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 25 OF 29

5	PROFILERS FOR DECKING SHEETS	UNIMET PROFILES LIMITED	DHARUHERA	
		MULTICOLOUR STEEL INDIA LIMITED	GURGAON	
		ISOLLOYD	SOLAN	
		NATIONAL STEEL AND AGRO	DHAR	
		ERA BUILD SYS	RUDRAPUR	
		TATA BLUE SCOPE	PUNE	HINJEWARI WORKS
		TATA BLUE SCOPE	BHIWADI	
		PENNAR INDUSTRIES	HYDERABAD	
		ALFA STEEL BUILDING SOLUTIONS	HOSUR	
6	PROFILERS FOR CLADDING SHEETS	MULTICOLOUR STEEL INDIA LIMITED	GURGAON	
		UNIMET PROFILES LIMITED	DHARUHERA-HARYANA	
		ERA BUILD SYS	RUDRAPUR	
		TATA BLUE SCOPE	PUNE	HINJEWARI WORKS
		TATA BLUE SCOPE	BHIWADI	
		PENNAR INDUSTRIES	HYDERABAD	
		ALFA STEEL BUILDING SOLUTIONS	HOSUR	
		ISOLLOYD	SOLAN	
		NATIONAL STEEL AND AGRO	DHAR	
7	ELECTROFORGED GRATING	INDIANA GRATING	PUNE	
		PREMIER POWER PRODUCTS (CALCUTTA) PVT LTD	HOWRAH	
		GREATWELD	PUNE	
		BHOLA RAM STEELS	PATNA	
		KANADE ANAND UDYOG	THANE	
		PINAX STEEL INDUSTRIES	PATNA	
8	GI PIPES	BIS APPROVED SOURCES HAVING VALID BIS LICENCE	-	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 26 OF 29

9	PVC WATER STOP	DURON POLYVINYL PVT. LTD	GURGAON	
		KANTA RUBBER	HYDERABAD	
		MARUTI RUBBER	NOIDA	
		JYOTI POLYVINYL	VADODARA	
		DEEP-JYOTI RUBBER PVT LTD	NOIDA	
10	BITUMEN ASPHALT	ALL GOVERNMENT REFINARIES	–	
11	PLASTIC, PVC PIPES	BIS APPROVED SOURCES HAVING VALID BIS LICENCE	-	
12	BITUMEN IMPREGNATED FIBER BOARD JOINT FILLER , BITUMEN SEALING COMPOUND	BIS APPROVED SOURCES HAVING VALID BIS LICENCE	-	
13	ALUMINUM COMPOSITE CLADDING	INDOMAX	ROORKEE	
		ALSTONE	DEHRADUN	
14	CERAMIC / VITRIFIED TILES	KAJARIA	-	
		SOMANY		
		SPARTEK INDIA	-	
		NITCO	-	
		ORIENT BELL	-	
		MARBITO		
		RESTILE	-	
		JOHNSON	.	
15.	ACID / ALKALI RESISTANCE TILES, AR BRICKS, ARCEMENT (POTASSIUM SILICATE BASED CEMENT MORTAR, PHENOLIC BASED RESIN CEMENT) AR BITUMASTIC	CARBORANDUM UNIVERSAL	CHENNAI	
		PELICAN	BHIWADI	
		CAMBRIAN	ALWAR	
		KERATECH	VADODARA	
		CHAMPION CERAMICS	CHAMPA	
		SUNSHINE CERAMICS	CHAMPA	
		MAHAKOSHAL POTTRIES	KATNI	
		PERFECT ACID WARE	JABALPUR	
		BABA BAIDNATH REFRACTORIES	PURULIA	
16.	FIRE PROOF DOORS	NAVAIR INTERNATIONAL LTD.	NEW DELHI	
		SHAKTI MET DOOR	HYDERABAD	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 27 OF 29

		SUPER STEEL	DELHI	FOR SINGLE LEAF ONLY
		SIGNUM FIRE PROTECTION	NAGPUR	
		RADIANT SAFE DOORS	AHMEDABAD	
17	PARTICLE BOARDS, PLYWOOD, MDF	NOVAPAN	-	
		ECOBORD	-	
		BHUTAN BOARD	-	
		KITPLY	-	
		CENTURY	-	
		GREEN PLY	-	
		DUROPLY	-	
		MERINO	-	\
18	ALUMINUM SECTIONS	HINDALCO	-	
		INDALCO		
		BALCO (VEDANTA)	-	
		NALCO	-	
		JINDAL	-	
19	HIGH SOLID CONTENT LIQUID APPLIED URETHANE BASED ELASTOMERIC MEMBRANE FOR WATER PROOFING	STP	-	
		IWL INDIA LTD	-	
		LLOYDS	-	
		CICO TECHONOLOGIES LTD		
		MK PETRO	-	
20	SANITARY ITEMS	PARRYWARE	-	
		HINDWARE	-	
		SEABIRD		
		ORIENT		
		HINDUSTAN		
		CERA		
21	CP BRASS TAP AND OTHER SANITARY FITTINGS	GEM	-	
		PARKO	-	
		JAQUAR	-	
		MARC	-	
22	POLYTHENE WATER STORAGE TANKS	BIS APPROVED SOURCES HAVING VALID BIS LICENCE	-	
23	NEOPRENE BELLOW STRAPS	CORI	CHENNAI	
		RESISTOFLEX	NOIDA	
		DWREN	KOLKATA	
24	RCC PIPES	BIS APPROVED SOURCES HAVING VALID BIS LICENCE	-	
25	POLYCARBONATE SHEETS	GE PLASTIC (SABIC)	-	
		BAYER (MAKROLON)	-	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 28 OF 29

26	ELECTRICALLY OPERATED HOIST (5T/2T)	CONSOLIDATED HOIST	SATARA	
		HERCULES HOIST	RA1GARH	
		GRIP ENGG	FARIDABAD	
		EDDY CRANE	PUNE	
		ARMSHEL	BANGLORE	
		CENTURY CRANE	PALWAL	
		ELECTROTHERAPY	HOWRAH	
		TRACTEL TRIFFER	PALWAL	
		ALFA CRANES	ALWAR	
		REVA HOIST	FARIDABAD	
27	STOP LOG GATES, TRASH RACK AND LIFTING BEAM	GENERAL MECHANICAL WORKS	BARODA	
		TRIVENI	NOIDA	
		MACMET	KOLKATA	
		PRADEEP STRUCTURES	HOWRAH	
		RED FAG	HYDERABAD	
		BSBK ENGG	NOIDA	
28	PTFE BEARING ELASTOMERIC BEARING	ALL CURRENT MORTH/RDSO APPROVED VENDORS		
29	FABRIC EXPANSION COMPENSATOR	KELD ELLENTOFT INDIA LTD	CHENNAI	
		EAGLE BURGMANN KE PRIVATE LTD	CHENNAI	
30	MINERAL WOOL FOR THERMAL INSULATION -	ROCKWOOL INDIA LTD.	HYDERABAD	Subject to. carrying out K- value test at CBRI Roorkee / NTPC approved lab.
		ROCKWOOL INDUSTRIES	BHILA1	
		LAP INUS	MALANPUR (MP)	
		M1NWOOL	RAJANANDGAON	
		LLOYD INSULATION	BHILAI	
		U.P. TWIGA	BULENDSHAHAR	
31	GEOTEXTILE	GARWARE WALL ROPES Ltd	PUNE	
		TENCATE GEOSYNTHETICS ASIA	MALAYSIA	NON WOVEN
32	GEOMEMBRANE (HDPE LINER)	D P WIRES PVT. LTD	RATLAM	
33	CI PIPES	BIS APPROVED SOURCES HAVING VALID BIS LICENCE		
34	COAL TAR ANTICORROSIVE	RUSTECH	KOLKATA	

TENDER NO – PSER:SCT:NKP-C1999:19		
VOLUME-IF-CML-REV-00	TECHNICAL CONDITIONS OF CONTRACT (TCC)	PAGE 29 OF 29

	COATING	PORWAL INDUSTRIES	RAIPUR	
		MP TAR	BHILAI	
		STP UMITED	JAMSHEDPUR	
35	ELASTOMERIC POLYURETHANE COATING	CIPY	PUNE	
		AMCHEM	NOIDA	
		E. WOOD. (APPLICATOR: PSL HOLDING, INDIA)	UK	
		CICO TECHONOLOGIES LTD	GURGAON	
36	HIGH PERFORMANCE MOISTURE COMPATIBLE CORROSION RESISTANT COATING SYSTEM	CECRI LICENSED SOURCES		
37	MS PIPES (IS:3589, WELDED PIPES)	BIS APPROVED SOURCES HAVING VALID BIS LICENCE		
38	PVC COATED CHAIN LINK FENCING & REINFORCED BARBED TAPE	SAUDAGAR MAC MAMMANLAL PVT LTD		
		MECAFERRI		

	TITLE: TECHNICAL SPECIFICATION FOR CIVIL, STRUCTURAL AND ARCHITECTURAL WORKS OF MAIN PLANT & BOP AREA AT 3X660 MW NORTH KARANPURA STPP	SPECIFICATION NO. PE-TS-405-C005	
		VOLUME II	
		SECTION "C"	
		REV. 0	DATE: 11/19/2014
		SHEET 1	OF 7

CIVIL WORKS

	TITLE: TECHNICAL SPECIFICATION FOR CIVIL, STRUCTURAL AND ARCHITECTURAL WORKS OF MAIN PLANT & BOP AREA AT 3X660 MW NORTH KARANPURA STPP	SPECIFICATION NO. PE-TS-405-C005	
		VOLUME II	
		SECTION "C"	
		REV. 0	DATE: 11/19/2014
		SHEET 2	OF 7

1. TECHNICAL SPECIFICATION:

The technical specification for civil, structural & architectural works consists of three parts.

1. Section-C : Section 'C' is special technical specification for design & construction.

2. Section-D : Section 'D' is General specification for design & construction.

Section-C is special technical specification for this project and NTPC specification included as "appendix-1" is a part of this document. In case there is any conflict between technical specification of Section D & Section C; requirements mentioned in Section-C shall prevail.

	TITLE: TECHNICAL SPECIFICATION FOR CIVIL, STRUCTURAL AND ARCHITECTURAL WORKS OF MAIN PLANT & BOP AREA AT 3X660 MW NORTH KARANPURA STPP	SPECIFICATION NO. PE-TS-405-C005	
		VOLUME II	
		SECTION "C"	
		REV. 0	DATE: 11/19/2014
		SHEET 3	OF 7

2. SCOPE OF WORK:

The scope of civil, structural and architectural works shall include construction of all civil, structural and architectural works including supply of all construction materials for all buildings, equipment and facilities for the project, except cement & reinforcement steel that shall be supplied free of cost by BHEL to the bidder at its store located inside plant area. Structural steel for fabrication works to be carried out at site shall be supplied by bidder from vendor(s) approved by BHEL/NTPC.

The nature of work generally involves earthwork in excavation, sheet piling wherever required, disposal of surplus earth, de-watering, backfilling around completed structures, plinth filling, piling, concreting including reinforcement and form work, masonry work, vibration isolation system consisting of springs & dampers for machine foundations if required, plastering, painting, uninsulated / sandwiched insulated metal wall cladding, roofing including permanent steel decking, flooring, false ceiling, under deck insulation, false flooring, acid and alkali resistant lining, fabrication of structures like coal bunker etc. at site, collection of pre-fabricated structural members from BHEL stores, assembly/erection of steel structures (with bolted field connections) and miscellaneous steel works (i.e. steel staircase, cable supports, pipe supports, ladders, walkways, railing, chequered plate/grating floors, inserts, anchor bolts etc.), painting of structures, paving, gravel filling, providing pre-cast covers, damp proofing, roof water proofing, anti-weed/ anti-termite treatment, roads, drainage, rain water harvesting, final grading and site clearance before handing over and any other items of work required for completion of all systems under the scope of work complete.

The scope of Bidder for civil, structural and architectural works as defined above shall include but not be limited to the following buildings/ areas/ systems along with their foundations, super structures and finishes complete. Major areas are listed below:

1. Infrastructure Works

a. Approach road to various buildings/facilities from main roads constructed by BHEL including drains and culverts wherever required.

b. Pipe culverts at road crossings, as directed by engineer in charge.

2. Foundations of various types for all buildings/ area/ systems including machine foundations as per requirements.

3. Civil, Structural, Architectural works for the following buildings/structures/facilities in Main plant Area:

- Main Power House building
- Mill Bunker building
- Mill Reject Silo & associated trenches
- Boiler structure
- ESP supporting Structure
- ESP control room building

	TITLE: TECHNICAL SPECIFICATION FOR CIVIL, STRUCTURAL AND ARCHITECTURAL WORKS OF MAIN PLANT & BOP AREA AT 3X660 MW NORTH KARANPURA STPP	SPECIFICATION NO. PE-TS-405-C005	
		VOLUME II	
		SECTION "C"	
		REV. 0	DATE: 11/19/2014
		SHEET 4	OF 7

- g. Compressor House
h. DELETED
i. TG foundation
j. TDBFP& MDBFP foundation
k. CEP pit
l. Fan foundations (PA/FD/ID Fans)
m. Coal Mill foundation
n. DG set foundation & Stack Foundation
o. Seal air Fan foundation
p. All other equipment foundations in Boiler-Turbine-Generator (BTG) area.
q. Area paving and miscellaneous foundations in Main Plant Block, Transformer Yard, Boiler area, ESP Area & Chimney area including, Heavy duty passages, drains, culverts, fire water trench, rail/ road crossing of fire water trench, drains.
r. Auxiliary Boiler Foundations & Switchgear cum Control Building
s. Transformer yard area foundations including Rail Track and facilities including condensate storage tank foundation, condensate transfer pump shed and oil-water separation pit.
4. **DELETED**
5. Fire protection system works including Fire station building
6. Outdoor transformer foundations
7. **DELETED**
8. Pipe /Cable / duct supporting structures, trenches, culverts, duct banks, pedestals, hume pipe culverts and thrust blocks etc. for all systems covered under the scope.
9. **DELETED**.
10. Civil, Structural, Architectural works for the following buildings/ structures/ facilities:
a. **DELETED**
b. **DELETED**
c. Gate Complex and Time Office cum CISF building including other gates along boundary wall
d. **DELETED**
e. Misc Switchgear building
f. **DELETED**
g. **DELETED**
h. Field Laboratory Complex Building
i. Weigh Bridge
j. Hydrogen Generation Plant
k. Fire Station Building.
11. Open Store Yard (20,000 Sq.M.) with RCC paving & chain link fence and gate
12. Landscaping
13. Earthing mats & riser for all buildings.
14. Facilities for rain water harvesting
15. Water supply & sanitation, plumbing works.
16. Boundary wall
List of scope is not exhaustive and bidder has to carry out all works required for system completion as per instructions of engineer in charge, even though, not

	TITLE: TECHNICAL SPECIFICATION FOR CIVIL, STRUCTURAL AND ARCHITECTURAL WORKS OF MAIN PLANT & BOP AREA AT 3X660 MW NORTH KARANPURA STPP		SPECIFICATION NO. PE-TS-405-C005	
			VOLUME II	
			SECTION "C"	
			REV. 0	DATE: 11/19/2014
			SHEET 5	OF 7

explicitly mentioned in above list of scope of works. No claim/additional claim shall be entertained by BHEL on account of works carried out by bidder as per instructions of engineer in charge but not covered in above list.

Most of the steel structures (excluding coal bunkers) shall be fabricated by BHEL in factory, and made available to bidder at site stores. The bidder shall collect the fabricated parts from BHEL office and shall assemble/erect the structures through bolted connections at site as per drawing/specification/instructions of engineer in charge.

Special structures like coal bunkers etc. shall be fabricated at site. Bidder shall arrange structural steel/Stainless steel for fabrications to be carried out at site. Bidder shall fabricate structures as per drawing and instructions of engineer in charge at an area allocated by BHEL at site. All necessary consumables for fabrication at site are in bidder's scope.

Most of the structures shall have bolted field connections. Site welding will be adopted (for components other than main framing members) only at specific places as a special case as per approved drawings/ directions of engineer in charge. Welded splicing as per drawing has to be done with suitable arrangement at ground before erection.

Civil, structural and architectural works though not explicitly mentioned in the above list but required for the completion of the various systems of the power plant shall also be in the scope of the bidder.

3. General Instructions:

The work to be performed under this specification consists of design, engineering, construction, erection and providing all labor, materials, consumables, equipment, temporary works, temporary storage sheds, temporary colony for labor and staff, temporary site offices, constructional plants, fuel supply, transportation and all incidental items not shown or specified but reasonably implied or necessary for the completion and proper functioning of the plant, all in strict accordance with the specifications including revisions and amendments thereto as may be required during the execution of work.

The scope shall also include setting up by the Bidder a complete testing laboratory in the field to carry out all relevant tests for structural steel, reinforcement steel & constituents of reinforced cement concrete (RCC) etc.

The work shall be carried out according to the design/drawings to be supplied by BHEL to the Bidder. In certain cases, however, detail construction drawings may have to be developed by bidder as required by BHEL.

The Bidder shall make the layout and levels of all structures from the general grid of the plot and the nearest GSI benchmark or other acceptable benchmark of Govt. deptt. as per the directions of the Engineer. The Bidder shall be solely responsible for the correctness of the layout and levels and shall also provide necessary instruments, materials, access to works, etc., to the Engineer for general checking of the correctness of the civil works.

	TITLE: TECHNICAL SPECIFICATION FOR CIVIL, STRUCTURAL AND ARCHITECTURAL WORKS OF MAIN PLANT & BOP AREA AT 3X660 MW NORTH KARANPURA STPP		SPECIFICATION NO. PE-TS-405-C005	
			VOLUME II	
			SECTION "C"	
			REV. 0	DATE: 11/19/2014
			SHEET 6	OF 7

All the quality standards, tolerances, welding standards and other technical requirements shall be strictly adhered to.

The Bidder shall fully apprise himself of the prevailing conditions at the proposed site, climatic conditions including monsoon pattern, soil conditions, local conditions and site specific parameters and shall include for all such conditions and contingent measures in the bid, including those which may not have been specifically brought out in the specifications.

In case of any conflict between stipulations in various portions of the specification, most stringent stipulation would be applicable for implementation by the Bidder without any extra cost to BHEL.

4. Exclusions:

- a. Leveling and grading (Bidder shall be provided with levelled and graded land. However, micro-grading shall be in bidder's scope of work).
- b. Roads (Main roads of plant are not included in bidder's scope. However, approach road to various buildings/facilities are in bidder's scope).
- c. Drains (Main drains of plant are not included in bidder's scope. However, Diversion drains in plant area, drains along approach road to various buildings/facilities, culverts on these drains and peripheral drains around buildings/ any other drains as instructed by engineer in charge are in bidder's scope).
- d. Design & Engineering.
- e. Owner's Construction office.
- f. Air cooled condenser.
- g. Service Building
- h. Administration Building
- i. Auditorium
- j. Canteen
- k. water treatment system
- l. Sewage treatment system (plumbing work in toilets and drinking water/sewage network is however included in scope of work)
- m. Fuel oil pump house and dyke area
- n. chimney

	TITLE: TECHNICAL SPECIFICATION FOR CIVIL, STRUCTURAL AND ARCHITECTURAL WORKS OF MAIN PLANT & BOP AREA AT 3X660 MW NORTH KARANPURA STPP		SPECIFICATION NO. PE-TS-405-C005	
			VOLUME II	
			SECTION "C"	
			REV. 0	DATE: 11/19/2014
			SHEET 7	OF 7

o. Township

5. Submissions: The documents listed below are to be submitted for approval of BHEL/NTPC unless specified otherwise. The list given below is not exhaustive but indicative only.

- Write-up on various statutory requirements and their compliance for various buildings, facilities, structures and systems, etc.
- Construction and erection procedure for all major structures such as Main Plant building including Control tower, Mill and Bunker building including coal bunkers, TG foundation and other machine foundations etc. covered under the Bidder's scope.
- Material test certificates.
- Wherever applicable, scheme for dewatering, shoring, strutting/sheet piling.

6. NTPC Specifications: Included as Appendix:1.

Enclosure: Appendix:1-NTPC Specification

NTPC Limited

(A Government of India Enterprise)



**NORTH KARANPURA SUPER THERMAL POWER
PROJECT (3x660MW)**

TECHNICAL SPECIFICATION

FOR

EPC PACKAGE

PART – B (CIVIL)

(BOOK 4 OF 5)

SECTION - VI

BIDDING DOCUMENT NO.: CS-4410-001-2

NTPC Limited

(A Government of India Enterprise)



NORTH KARANPURA SUPER THERMAL POWER PROJECT (3x660MW)

TECHNICAL SPECIFICATION

FOR

EPC PACKAGE

PART – B (CIVIL)

(BOOK 4 OF 5)

SECTION - VI

BIDDING DOCUMENT NO.: CS-4410-001-2

(This document is meant for the exclusive purpose of bidding against this Package and shall not be transferred, reproduced or otherwise used for purposes other than that for which it is specifically issued).

PART – B

CIVIL

**NORTH KARANPURA STPP
(3 X 660 MW)
EPC PACKAGE**

**TECHNICAL SPECIFICATION
SECTION-VI
BID DOC.NO.: CS-4410-001-2**

PART – B (CIVIL) (BOOK 4 OF 5)

D – 01

CIVIL WORKS

INDEX**1.00.00 GENERAL****2.00.00 SCOPE OF WORK****2.02.00 CONSTRUCTION FACILITIES****2.03.00 EXCLUSIONS****3.00.00 SUBMISSIONS****4.00.00 GENERAL LAYOUT PLAN**

4.02.00 ~~TECHNICAL SPECIFICATIONS FOR PLANT PRE-FAB. BOUNDARY WALL AND~~
~~WATCH TOWER~~

4.03.00 ~~SITE LEVELLING AND SLOPE PROTECTION WORK~~

5.00.00 SALIENT FEATURES & DESIGN CONCEPT OF MAIN PLANT BUILDINGS, CHIMNEY, COOLING TOWERS, CW SYSTEM & MAKE-UP WATER SYSTEM, DM PLANT, PT PLANT & CW TREATMENT CIVIL WORKS, BALANCE OF PLANT BUILDINGS, COAL HANDLING & ASH HANLING SYSTEMS, SWITCHYARD STRUCTURES, FACILITIES FOR RAILWAY SIDING, FUEL OIL HANDLING SYSTEM, OFFICE BUILDINGS, ROADS AND DRAINAGE

5.00.01 ARCHITECTURAL CONCEPTS & DESIGN

5.01.00 MAIN PLANT BUILDINGS/ STRUCTURES / MACHINE FOUNDATIONS

5.02.00 ~~CHIMNEY~~

5.03.00 ~~COOLING TOWERS~~

5.03.01 ~~INDUCED DRAUGHT COOLING TOWERS~~

5.03.02 SWITCH GEAR / CONTROL ROOM FOR COOLING TOWER

5.04.00 CW SYSTEM & MAKE-UP WATER SYSTEM

5.05.00 ~~DM PLANT, PT PLANT, ETP & CW CHEMICAL TREATMENT CIVIL WORKS &~~

~~CPU CIVIL WORKS~~

5.06.0 ~~SWITCHYARD CIVIL WORKS~~

NORTH KARANPURA STPP
(3 X 660 MW)
EPC PACKAGE

TECHNICAL SPECIFICATION
SECTION-VI, PART-B
BID DOC. NO.: CS-4410-001-2

5.07.0	~~COAL HANDLING PLANT (CHP) STRUCTURES~~
5.08.0	~~ASH HANDLING SYSTEM & ASH WATER RECIRCULATION SYSTEM~~
5.09.00	SEWERAGE SYSTEM
5.10.00	PLANT STORM WATER DRAINAGE SYSTEM
5.11.00	DIVERSION OF EXISTING DRAINAGE
5.12.00	ROADS
5.13.00	~~ADMINISTRATION BUILDING~~
5.14.00	~~PLANT AUDITORIUM~~
5.15.00	MAIN GATE COMPLEX & CISF BUILDING
5.16.00	~~PERMANENT STORE BUILDING~~
5.17.00	~~FACILITIES FOR RAILWAY SIDING AND CHP AREA~~
5.18.00	~~ASH DYKE~~
5.19.00	~~FIRE WATER PUMP HOUSE, FOAM PUMP HOUSE AND FIRE WATER BOOSTER PUMP HOUSE~~
5.20.00	~~RAW WATER RESERVOIR~~
5.21.00	~~FUEL OIL HANDLING SYSTEM~~
5.22.00	~~O&M WORKSHOP BUILDING~~
5.23.00	~~CANTEEN~~
5.24.00	~~FIRE STATION BUILDING~~
5.25.00	~~DOZER SHED~~
5.26.00	AREA PAVING IN MAIN PLANT BLOCK
5.33.00	~~OWNER'S CONSTRUCTION OFFICE~~
5.34.00	~~ASH DYKE MAINTENANCE BUILDING~~
5.35.00	~~SEWAGE TREATMENT PLANT~~
5.36.00	BALANCE BUILDINGS

~~6.00.00 DESIGN CRITERIA~~

- 6.01.00 GENERAL
- 6.02.00 LOADING
 - 6.02.01 DEAD LOADS
 - 6.02.02 IMPOSED LOADS
 - 6.02.03 EQUIPMENT, PIPING AND ASSOCIATED LOADS
 - 6.02.04 CRANE LOAD
 - 6.02.05 SEISMIC LOAD
 - 6.02.06 WIND LOAD
 - 6.02.07 TEMPERATURE LOAD
 - 6.02.08 DIFFERENTIAL SETTLEMENT LOADS
 - 6.02.09 ADDITIONAL LOADS
- 6.03.00 CIVIL DESIGN CONCEPTS
 - 6.03.11 DESIGN CRITERIA FOR ASH SILO
 - 6.03.21 DESIGN OF FOUNDATION FOR TG, TDBFP, MDBFP & FAN FOUNDATIONS
 - 6.03.30 BOILER/ ESP SUPPORT STRUCTURES
 - 6.03.38 DESIGN CRITERIA OF RCC FLOORS
 - 6.03.39 DESIGN CRITERIA OF RCC ROOFS:
 - 6.03.40 DESIGN CRITERIA FOR FOUNDATION
 - 6.03.41 COAL HANDLING PLANT STRUCTURES
- 6.04.00 CORROSION PROTECTION

~~7.00.0 FOUNDATION SYSTEM SOIL DATA AND GEOTECHNICAL INVESTIGATION~~

- 7.01.0 SOIL DATA
- 7.02.0 FOUNDATION SYSTEM
 - 7.02.01 GENERAL REQUIREMENTS

7.02.02	OPEN FOUNDATIONS
7.02.03	PILE FOUNDATIONS
7.03.0	SPECIAL REQUIREMENTS
7.04.0	EXCAVATION FILLING AND DEWATERING
7.05.0	SHEETING & SHORING
7.06.0	SPECIAL REQUIREMENTS FOR RIVER SIDE/ SUBMERGENCE FACILITIES
7.07.0	GEOTECHNICAL INVESTIGATION - ANNEXURE-I
7.08.0	APPENDIX A –BOREHOLES

8.00.00 GENERAL SPECIFICATION

8.01.01	JOINTS IN CONCRETE STRUCTURES
8.01.52	ACID/ ALKALI RESISTANT LINING
8.01.53	BITUMINOUS COATING
8.02.00	CONCRETE
8.03.00	FORMWORK
8.04.00	FENCING AND GATE
8.05.00	GRATING
8.06.00	FABRICATION
8.07.00	STEEL HELICAL SPRING AND VISCOUS DAMPERS

9.00.00 ARCHITECTURAL CONCEPTS AND DESIGN

9.02.00	GENERAL ARCHITECTURAL SPECIFICATIONS
9.03.00	WATER SUPPLY AND SANITATION
9.04.00	FLOORING
9.04.19	PAVING
9.05.00	ACID/ ALKALI RESISTANT LINING
9.06.00	ROOF

9.06.06	ROOF WATER PROOFING
9.07.00	WALLS
9.08.00	COLOUR COATED AND OTHER SHEETING WORK
9.09.00	PLASTERING
9.10.00	PAINTING & ALUMINIUM COMPOSITE PANEL CLADDING
9.11.00	DOORS & WINDOWS
9.12.00	GLAZING
9.13.00	FALSE CEILING
9.14.00	INTERIOR DESIGN
9.15.00	FINISHING SCHEDULE
	TABLE A -PROPOSED ACID /ALKALI RESISTANT TREATMENT
	TABLE B - INTERIOR FINISHING SCHEDULE
	TABLE C -EXTERIOR FINISHES SCHEDULE

10.00.00 MATERIAL SPECIFICATION

10.01.00	CEMENT
10.02.00	AGGREGATES
10.03.00	REINFORCEMENT STEEL
10.04.00	STRUCTURAL STEEL
10.05.00	BRICKS
10.06.00	FOUNDATION BOLTS
10.07.00	STAINLESS STEEL
10.08.00	WATER
10.09.00	STATUTORY REQUIREMENTS

11.00.00 INSPECTION, TESTING AND QUALITY CONTROL

12.00.00 ANNEXURES

- a) LIST OF CODES & STANDARDS
- b) CONSTRUCTION METHODOLOGY
- c) ~~BORE HOLE DATA~~
- d) ~~WIND DESIGN CRITERIA~~
- e) ~~SEISMIC DESIGN CRITERIA~~
- f) QA REQUIREMENT
- h) HIGH PERFORMANCE MOISTURE COMPATIBLE CORROSION RESISTANT COATING SYSTEM (for concrete surfaces of IDCT)
- (i) ~~LIST OF TENDER DRAWINGS~~



CLAUSE NO.

TECHNICAL REQUIREMENTS

5.00.00

SALIENT FEATURES & DESIGN CONCEPT OF MAIN PLANT BUILDINGS, ~~CHIMNEY~~, ~~COOLING TOWERS~~, ACW SYSTEM, ~~DM PLANT~~, ~~PT PLANT & CW TREATMENT~~ CIVIL WORKS, ~~BALANCE OF PLANT BUILDINGS~~, ~~INTERNAL COAL HANDLING & ASH HANLING SYSTEMS~~, ~~SWITCHYARD STRUCTURES~~, ~~FUEL OIL HANDLING SYSTEM~~, OFFICE BUILDINGS, ROADS and DRAINAGE



CLAUSE NO.

TECHNICAL REQUIREMENTS

THIS PAGE IS INTENTIONALLY LEFT BLANK

CLAUSE NO.	TECHNICAL REQUIREMENTS			एनटीपीसी NTPC
5.01.00	Main plant Buildings/ Structures shall comprise of: a) Main Power House b) Mill Bunker Building c) Machine Foundations in Main Plant d) Boiler Foundation e) Compressor House f) ESP Foundation g) ESP Control Building h) Miscellaneous Equipment Foundations & Pipe Cable Trenches/ and Pedestals below finished ground level. i) Pipe & Cable Gallery j) ~~Service Building~~ k) ~~Transfer Points , Conveyor Galleries & Trestles~~ ~~The Main Power house, Bunker building, transfer points, conveyor galleries and trestles, boiler supporting structure, ESP supporting structures including inlet and exhaust duct support structures, Pipe cable Galleries & trestles shall have structural steel framed super structure.~~ All other buildings may have either RCC or structural steel framework. Brief description of the above mentioned Main Plant Buildings is furnished herein:- a) Main Power House • Salient Features: Main Power House shall consist of the Turbine bay, adjacent Deaerator/ heaters Bay, electrical bay & Control room Building (as stipulated elsewhere in the specification). The Turbo – Generator (TG) foundation, MDBFP & TDBFP foundations shall be located inside the power house. The RCC floors shall comprise RCC slab over profiled metal deck sheets (to be used as permanent shuttering over structural steel beams and not to be considered for deign of RCC slab as composite slab). Shear anchor studs shall be provided with stud welding			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 11 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS	एनटीपीसी NTPC	
	through metal deck at regular interval on all top flange / flange plate of structural beams. However, steel gratings, chequered plate flooring as well as precast RCC covers shall be provided as per the functional requirements. All RCC pits & trenches below ground floor slab (including CW pit & CEP pit) shall be covered with minimum 40 mm thick MS grating supported on structural steel beams. The RCC pits shall also be provided with a sump at the corner for dewatering with pumps. Staircases & ladders shall be provided for access to these pits. EOT cranes shall be placed in the Turbine Bay with the Gantry Girders (supporting Crane Wheel Loads) supported on structural steel brackets on A & B row columns). Walkway with chequered plate shall be provided at crane girder level at both 'A' row & 'B' row side with caged ladder access from the operating floor. All columns & beams of Main Power House shall be of structural steel with base plate level of columns 1.20m below ground floor slab level in general except for CW pit and other pit areas where structural steel column shall be extended below upto a depth lower than the pit top surface such that the column base plate & stiffeners are concealed below the pit raft level. The roof system in Turbine bay shall comprise a structural steel girder (open web or solid web) for the entire bay width. The roof slab shall consist of 40mm thick (min.) RCC slab supported on profiled metal deck sheet (to be used as permanent shuttering). The metal deck sheet shall be supported on structural steel purlins. The purlins shall in turn be supported on turbine bay roof girder at regular interval. Additional waterproofing shall be provided above the roof RCC slab as per details mentioned elsewhere in this specification. 1 in 100 slope shall be provided for the turbine bay roof sloping downwards towards A-row (towards transformer yard). Minimum 150mm diameter galvanized mild steel pipes shall be used at A-row & C-row as Rainwater Down comers. Staircases in main power house shall be of structural steel. Treads & risers of each staircase shall be 40mmthick MS grating and handrail/ hand post shall be 32mm NB circular hollow sections unless specified otherwise in architectural section of the specification. All staircases in Turbine Bay and Deaerator Bay shall be enclosed with 230 thk brick masonry Wall with fireproof doors at all floor landing levels. Skylight structure on Turbine bay roof shall be provided at regular interval for natural lighting. The parapet wall of minimum 1 m height shall be provided all around roof of the main plant building. All edges of openings shall have edge protection angles (minimum ISA 75x75x6) and handrails with hand posts (Hand post spacing 1.50m maximum). The vertical cladding system for this completely covered Main Power House building shall comprise brick masonry/ Aerated Autoclaved Concrete (AAC) block masonry/ AAC panel wall & metal sheets as mentioned in the Architectural Features. ii. Design Concept: Main Power House shall be designed as moment resisting sway frame in the transverse direction and braced in the longitudinal direction. However, due to functional requirement , vertical bracings to the Control building column may not be possible at (&above) the operating floor level and in such case, control room frames shall be designed as moment resisting frames in both transverse and longitudinal directions. All beam column moment connections shall be designed for adequate ductility. The building shall have connectivity with walkways from Boiler & Service Building through PTFE bearings (sliding bearing) only. The connectivity with cable gallery shall be as specified in Pipe & cable gallery section of this chapter. Floor level acceleration spectra shall be generated during seismic analysis for design of equipment /pipe supports located at the elevated floors. Adequate number of thermal expansion gaps (minimum 1.50m between adjacent structural frames at expansion joint and minimum 50mm between RCC slabs at expansion joint) shall		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 12 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	be provided between the units and Control Building. In the RCC floor/ roof slabs, the spacing of shear anchor studs on structural beams shall be minimum of the spacing required for i) the restraintment of compression flanges of beams and ii) transfer of the horizontal shear at floor/roof to the supporting beams. The roof girder in Turbine Bay shall be provided with a camber to take care of deflection due to dead weight. Rolled sections/ I sections with additional flange plates shall not be acceptable for main columns & auxiliary columns. The roof girder to column connection shall be bolted connection using high strength bolts. The roof girder of Turbine Hall shall be adequately braced in plan using Tie Level and Rafter Level Bracings. The longitudinal bracing shall be designed detailed such that adequate restraint to the entire column cross- section is achieved. Minimum gusset plate thickness for bracings shall be 12mm. The base plates of Main Columns in A, B, & C rows shall be of grillage type of minimum depth 800mm and comprising bottom base plate, top cap plate & interconnecting vertical stiffeners. For all other design methodology, refer to Design Criteria specified elsewhere in this specification. Architectural Features This building shall be of Structural Steel Framed structure and shall be completely covered with external cladding and RCC roof. The external vertical face (herein stated as 'A' row) of Main Power House facing (& adjacent to) the transformer yard and also the two gable ends shall be completely covered with vertical cladding comprising 3.0m high brick wall (on Ground floor slab) and single skin profiled vertical metal sheet for the remaining height except for the vertical segment between operating floor & Gantry girder bracket level where double skin vertical metal sheet shall be provided. RCC fire barrier wall shall be provided in front of the transformers as per functional/statutory requirements in lieu of brick wall at A-row. The above mentioned RCC wall shall be covered with single skin metal sheet on external face. The 'A' row & Gable End columns projecting inside the turbine hall shall be concealed with single skin profiled metal deck sheet from operating floor level to crane girder bracket top level The external vertical face (herein stated as 'C' row) facing (& adjacent to) the Boiler area shall be completely covered for entire height of the building except for the portion where there is a functional requirement to keep uncladded. The vertical cladding on C row shall comprise of 3.0m high brick wall on Ground floor followed by either single skin metal sheeting with runners or brick walls covered with single skin metal sheeting on external face (for all floors requiring 2 hrs of fire rating e.g., switchgear room, Cable Spreader room, Ventilation/ Air Washer Room & AHU Rooms) Glazing for A Row, C Row & Gable end shall be reflective 6mm thick toughened glass with Aluminium frame. Fire rated glass / hermetically sealed double glazing shall be provided between A/C areas & non-A/C areas. Light Weight Aerated Concrete Panel with Single Skin Metal Panel cladding & insulation in between shall be provided in exterior of UPS Battery room area, Control Equipment Room and Control room area. Inside the main power house building, brick masonry wall with 2 hr fire rating (and fire proof doors) shall be provided for switchgear rooms, cable spreader rooms, switchgear rooms, AHU rooms, Air Washer rooms & Oil rooms and all other rooms where fire protection is envisaged.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 13 OF 234	

CLAUSE NO.	TECHNICAL REQUIREMENTS	एनडीपीसी NTPC	
	Cut-outs and opening shall be provided in floors and walls as per functional requirement. Sky light structure shall be provided in curved shape with 4mm embossed clear translucent polycarbonate IR sheet both side UV coated minimum 55% light transmission, solar control, approved make, texture and shade, fixed to powder coated Aluminium section with 60mm width top & bottom with EPDM gasket as per standard framing. The Control Room / Control Equipment Room shall have 120 minutes Fire Rated Fully Glazed non load bearing fixed partition with valid fire test certificate from national or international lab. The Partition Frame shall be manufactured from minimum 2.0mm galvanized steel sheet pressed to form a profile of nominal size 60mm x 70 mm & fixed to the supporting construction by means of M 10 X 120 or bigger steel bolts at 300mm from the edges & every 500mm c/c. False ceiling in Control Room / Control Equipment Room shall be of GI Metal Ceiling Clip in plain Bevelled edge global white colour tiles of size 600x600 and 0.5mm thick with 25mm height. All door, windows in air conditioned area and all windows glazing shall be provided with Aluminium frame-work Steel door and Fire Proof doors shall be provided as per requirements. Area of windows shall be minimum 10 % of floor area. Each unit shall have minimum 1 nos. of passenger lift of capacity 13 persons in BC way, Stairs in BC Bay and on A-Row shall be provided as per functional requirement and as per National Building Code and factories Act. All stairs in BC Bay lift lobby Area shall be in RCC. Stainless steel railing shall be provided at TG Floor level for all cut-outs/ openings and stairs & M.S. railing shall be provided for all other locations. For each unit, minimum one number Gent's toilet with adequate facilities including Drinking water space and Janitor's space shall be provided at each level of Power house Building, in addition one no Ladies toilet shall be provided in each unit at ground floor, mezzanine floor and operating floor level. Main Control Room façade on B-Row shall have Fire rated glass partitions up to false ceiling level and brick masonry wall above false ceiling up to floor slab above Control Room, finished with Decorative murals in Tiles & Aluminium Composite Panels. In Control room/ Control Equipment Room, Cat Walk Way above false ceiling shall be provided for service/ maintenance. Adequate partitioning as per functional requirement above false ceiling in control Room & CER shall be provided for Inert Gas zoning by brick wall /aerated concrete panel wall for inert gas partitioning. Internal steel columns in Air Conditioned Area of Main Power House Building shall be encased with Aluminium Composite Panelling up to false ceiling. Functionally the very heart of Power House Building is its Control Room. Special attention shall be given for conceptualisation of interior design of the Control Room. Metal Panel Cladding shall be composed of Different Colour shades to match with the surroundings. External finish of Masonry wall, shall be Resin Bounded Granular Texture finish.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 14 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
	b) Mill and Bunker building The mill bunker building shall house coal mills, feeders, Cylindrical Coal Bunker & Conical Hopper, Tripper Conveyor & its drive and monorails. All columns, main beams and secondary beams shall be made of structural steel. The RCC floor slabs (supporting the Feeder and Tripper Conveyors) shall comprise RCC slab supported on profiled metal deck sheet (to be used as permanent shuttering not to be considered for design of RCC slab as composite slab) and Shear anchor studs shall be provided with stud welding through metal deck at regular interval on all top flange / flange plate of structural beams which support the RCC slab. Structural steel platform (with MS grating and hand rails and cage ladder) shall be provided above the feeder floor for access to the bunker coal level monitoring strain gauges. The bottom level of base plates of columns shall be 1.20 M below the finished floor level of ground floor of Main Power House. The columns of Mill-Bunker building shall consist of built up structural steel I-sections. Rolled sections with additional cover plates on column flange shall not be acceptable for column sections. The base plate of main columns of the Mill bunker building shall be grillage type (minimum 800 depth) consisting of bottom base plate, top plate and vertical stiffeners. The cylindrical coal bunker and conical hopper shall be made of structural steel. The inside surface of hopper shall be lined with stainless steel plates the details of which are mentioned hereafter in this specification. Structural steel brackets with PTFE bearings shall be provided at the end columns to support the external gallery of the Tripper Conveyor. All walkway bridges connecting the Boiler with Mill Bunker building shall have PTFE bearings, in case the Mill-Bunker building is designed as structurally independent of the Boiler structure. The Mill-Bunker building shall be provided with insulated, sandwiched metal sheet roofing comprising of troughed profile permanently colour coated sheet on outside and plain permanently colour coated sheet on inside with 50mm thick mineral wool insulation in between the two sheets. A slope of 1 in 5 shall be provided for quick drainage of rain water. The RCC floor supporting the tripper conveyor shall be fully covered upto the roof level with single skin metal sheet fixed over structural steel runners. Bidder has the option to provide the Mill Bunker Building structurally independent of the Boiler supporting structure or integrate this building with the Boiler structure. i) Design Concept The Mill Bunker Building shall be conceptualized as moment resisting frames in transverse direction and as braced framed in longitudinal direction. In the transverse direction the bracings may be provided, wherever feasible, in order to meet the deflection requirement specified in clause 6.03.07 of this section. The bracings in the longitudinal direction shall be in 2 planes through a pair of longitudinal members laced (or battened) together. Each bracing member shall be connected to column flange plate through gusset plate (minimum 12mm thick).		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 15 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			एनटीपीसी NTPC
	Minimum thickness of structural steel Bunker plates shall be 12mm inclusive of 4mm corrosion allowance. Minimum wall thickness of Hopper shall be 8mm. Minimum thickness of stainless steel liners on the inner surface of hopper wall shall be 4mm conforming to grade SS304. To ensure smooth flow of coal, the hopper surface shall be provided with minimum angle of 73° with the horizontal plane. The top of the cylindrical bunker shall bear no load/ reaction from the tripper floor and accordingly neoprene bellow strap shall be provided at the interface between the two structures to allow free deflection of the tripper floor. Neoprene bellow strap shall be provided all-round the bunker to effectively seal the gap between top of bunker and sealing plate below bunker. For all other design methodology, refer to Design Criteria specified hereafter in this specification. Architectural Features: The Mill & Bunker Building shall be a structural steel framed structure having RCC floors and prefabricated insulated metal sandwiched sheet sloped roof. The tripper floor side cladding shall be Single skin Metal cladding with steel louvered windows and fixed windows with poly carbonate sheet glazing. Area of windows shall be minimum 10 % of floor area. Rainwater down comer shall be of galvanised MS pipes and shall be located at every column location.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 16 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
	THIS PAGE IS INTENTIONALLY LEFT BLANK		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 17 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
	d) Machine Foundations in Main Plant Area Turbo- Generator (TG) foundation: Alternative-1 The TG foundation shall comprise of RCC top deck supported on steel helical springs & viscous dampers (herein after called as the Vibration Isolation System – VIS) and shall be located in the Turbine bay of Main Power House. The VIS shall be placed on a group of RCC/ Structural Steel columns. These TG columns can be interconnected to the Main Power House Building frame either rigidly or connected through PTFE bearings on corbels/ brackets of the TG Columns. The general arrangement & details of VIS and supporting group of columns and beams shall be based on TG Equipment detail of the Bidder. Alternative-2 The TG foundation shall be conventional machine foundations comprising of RCC top deck directly supported on substructure comprising of columns and beams without any steel helical springs and viscous dampers. The columns shall be rigidly connected to the RCC deck at top and shall rest on open / pile supported foundation at bottom. The entire foundation system (including deck, columns and raft) shall be isolated from the main plant building structural system and no connection between the main plant structure and TG foundation is permitted. Bidder has the option to choose either Alternative -1 or Alternative-2 based on his design philosophy and practice. However in case Alternative-2 is adopted by bidder, then the bidder has to furnish extended warranty of five years for satisfactory static and dynamic performance of the foundation system. TDBFP & MDBFP foundations:		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 18 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
	Alternative-1 TDBFP&MDBFP foundations shall consist of RCC top deck supported on steel helical springs & viscous dampers inside Main Power House. In case the top deck is located at operating floor/mezzanine floor level, the springs/ viscous dampers shall be supported on a group of structural steel columns-beam grid which shall be rigidly integrated with the Main Power House Structural frame. Alternative-2 TDBFP&MDBFP foundations shall consist of RCC top deck directly supported on structural beams and columns without any steel helical springs & viscous dampers inside Main Power House. The structural columns and beams supporting the TDBFP / MDBFP shall be independent of the Main Power House Structural frame and shall also have independent foundation without any connection to other nearby foundations. Further each TDBFP / MDBFP shall have independent supporting structural arrangement without any interconnection among themselves. Bidder has the option to choose either Alternative-1 or Alternative-2 based on his design philosophy and practice. However in case Alternative-2 is adopted by bidder, then the bidder has to furnish extended warranty of five years for satisfactory static and dynamic performance of the foundation system. BFPs in ground floor In case the MDBFP/TDBFP foundation is envisaged to be located at ground floor of Main Power House, then these shall be designed as block foundations directly resting on soil / pile. Vertical facing of this block foundation shall be isolated from adjacent footings by providing minimum 100mm thick polystyrene board of type-1 conforming to IS:4671 with density 20 Kg/Cum sandwiched between the vertical face of block foundation and 230 thick brick wall all round. PA/ FD/ID Fan foundations: Alternative-1 These fan foundations shall consist of RCC top deck supported on steel helical springs & viscous dampers. The springs & viscous dampers shall be in turn supported on RCC sub-structure which shall be supported below Ground level. Alternative-2 These fan foundations shall consist of RCC top deck supported on RCC sub-structure which shall be supported below Ground level either with open or pile foundation. Bidder has the option to choose either Alternative -1 or Alternative-2 based on his design philosophy and practice. However in case Alternative-2 is adopted by bidder, then the bidder has to furnish extended warranty of five years for satisfactory static and dynamic performance of the foundation system. Coal Mill foundation: Coal Mill foundation shall be RCC block foundation directly resting on virgin soil below Ground level. The vertical faces of this block foundation shall be isolated from adjacent footings by providing minimum 100mm thick polystyrene board of type-1 conforming to		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 19 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	IS: 4671 with density 20 Kg/cum sandwiched between the vertical face of block foundation and 230 thick brick wall all round. General requirement for machine foundations: - The vibration isolation system (where ever applicable) supplied shall be of proven make and shall be in successful operation supporting machines like steam turbo-generators, ID/PA/FD Fans, BFP, etc., - Springs and dampers of the vibration isolation system shall be located minimum 300 mm above the finished floor level for ID/PA/FD fans. Basements/pits/trenches shall not be provided for these machine foundations. - Wherever alternative-2 is adopted by the bidder for TG or BFPs or FAN foundations, suitable provisions to be ensured by the bidder in their General Arrangement and design to prevent transmission of vibration from these machine foundations to other nearby structures / foundations. - The bidder or his consultant should have adequate prior experience in design of machine foundations for the respective alternative to be adopted by the bidder and the machines should be in successful operation for al least one year prior to the date of submission of bid. For detailed specification of steel helical springs and viscous dampers refer clause no 8.07.00. Design Criterion: Refer clause 6.03.21 for design criterion of machine foundations e) Boiler Structure (ONLY BOILER FOUNDATION IS IN BIDDER'S SCOPE.) The Boiler supporting structure shall be structural steel framed superstructure adequately braced in vertical planes in both the orthogonal directions. The general arrangement & details of structural steel columns, beams, bracings, ceiling girders etc shall be as per the Bidders Boiler Structure design and detailed engineering scheme. The bottom level of base plates of columns shall be 1.20 M below the finished floor level of ground floor of Main Power House. The RCC pedestals supporting the column base plates shall be extended in order to provide RCC encasement to the structural steel columns up to at least 350mm above the top of the paving RCC slab. The bidder shall have the option to design the Boiler structural steel superstructure as an isolated structure or structurally integrate it with the Mill-Bunker building superstructure based on Bidder’s design practice. (i) Design Concept: Boiler supporting super-structure shall be designed by the Bidder based on working stress method for structural steel as per IS 800 and as IS : 456 for RCC sub-structure (foundations).			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 20 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	f) Compressor House (i) Salient Features: The compressor house shall be a framed superstructure of either RCC or structural steel construction with a overhead crane of required capacity. The gantry girder for the crane shall have walkway with chequered plate on both rows and cage ladder access. The ground floor slab shall comprise of all RCC block foundations, cable trenches and pipe trenches. (ii) Design Concept: Framing arrangement shall be as specified in clause 6.01.03 iii) for steel structure and clause 6.01.03 iv) for concrete structure. Design shall also be based on the Design Criteria specified elsewhere in this specification. Architectural Features This building shall be clad with brick wall up to window sill height & Single Skin Metal cladding above it. Roof of the building shall be insulated sandwiched double skin metal sheeting. However, in case of RCC construction bidder shall have option to provide brick masonry cladding for full height of the building and RCC slab roof. Cut-outs and opening shall be provided in floors and walls as per requirements. Metal cladding shall be composed of different colour shades to match with the surroundings. External finish shall be of Premium Acrylic Smooth Paint. The size, height, door/window/rolling shutter details and building size shall be as per the approved equipment layout plan of the bidder. g) ESP structure: (ONLY ESP FOUNDATION IS IN BIDDER'S SCOPE.) (i) Salient Features The ESP structure shall be a structural steel superstructure with vertical bracings in the required vertical planes in both longitudinal and transverse directions, the details of which shall be as per the approved ESP equipment GA & details of the bidder. The bottom level of base plate of the structural columns shall be kept such that, the top of gusset plate / top of bolts shall be at least 200mm below the top of finished floor level. The gusset plate / base plate shall be encased in concrete upto the bottom of the floor slab. The RCC pedestals of the columns shall be extended upto at least 350mm above the ground floor slab for encasement of the columns. (ii) Design Concept: Design of ESP structure shall be based on Working stress method as per IS 800. It shall be an axially braced structure in both orthogonal directions. The ESP supporting columns shall be suitably strengthened about the minor axis for sliding movement of the base plate of ESP due to thermal movement.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 21 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			एनटीपीसी NTPC
	i) ESP Control Building (i) Salient Features ESP Control Building shall be a framed superstructure of either RCC or structural steel construction with RCC floors at ground floor level and upper levels. The RCC floors at upper levels shall be cast in situ RCC slabs supported on profiled metal deck incase of structural steel construction. Roof of the building shall be insulated sandwiched double skin metal sheeting. However, in case of RCC construction bidder shall have option to provide brick RCC slab roof. The rainwater down comers shall be as per specification and shall be suitably concealed. The external Transformer Yard of the building shall comprise the transformer foundations and cable slit below ground level. The building shall have Lift structure with lift pit below ground level and staircase at each gable end of the building. (ii) Design Concept Framing arrangement shall be as specified in clause 6.01.03 iii) for steel structure and clause 6.01.03 iv) for concrete structure. However, bracings in any internal axis may not be possible due to functional requirement and columns in that row shall be designed for biaxial bending. Design shall also be based on the Design Criteria specified elsewhere in this specification. Architectural Features: This building shall be framed structure & shall be completely covered with Autoclaved aerated concrete panels on all four sides except for the portion in front of the external Transformer Yard. Provision for glazed/ fire proof doors & windows shall be included. Minimum 345mm thk brick wall shall be provided for the external brick			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 22 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	wall facing the adjacent transformer yard and the brick wall height shall be 600mm above the highest point of the transformer. Inside the building, AHU rooms, UAF Room & Battery rooms shall have brick masonry of one brick thickness. Entire transformer yard, which shall be adjacent to the building, shall be provided with metal fencing with gates. The building shall accommodate cable vault, toilet, staircase, switchgear rooms, control rooms and AHU room. An auxiliary transformer yard with fencing and gate shall be provided adjoining to the building. Control room and VFD room shall be air-conditioned and shall have false ceiling. Windows& Ventilators all shall be provided with Aluminium sections. All doors, windows in air conditioned area shall be provided with hermetically sealed toughened glass glazing in Aluminium frame work Steel doors and Fire proof doors shall be provided as per requirements. Internal columns in Control Room shall be encased with Aluminium Composite Panel cladding/ Laminated Board Panelling Minimum 2 Nos. of stairs and 2 Nos. of Toilets shall be provided as per requirement. Cut-outs and opening shall be provided in floors and walls as per requirements. External finish shall be of Premium Acrylic Smooth Paint. j) Miscellaneous Equipment Foundations & Pipe Cable Trenches/ and Pedestals below finished ground level. Refer clause 7.02.01 for design criterion for Miscellaneous Equipment Foundations & Pipe Cable Trenches/ and Pedestals below finished ground level. k) Pipe & Cable Galleries (i) Salient Features: The Pipe & Cable Galleries shall be Structural Steel Superstructure. The steel galleries shall be supported on 2 legged/ 4 legged trestles, the arrangement of which shall be developed by the Bidder. The width of the Galleries shall vary depending on the functional requirement. A walkway as per requirement shall be provided along the Cable Trays supporting tier of the gallery. The walkway shall comprise MS grating and 1.0m high handrail made of 32NB MS pipes. Plan bracings shall be provided at all levels/tiers of the pipe & cable gallery girders. Minimum gusset plate thickness shall be 8mm for all connections. The level of the bottom of steel of the gallery shall be at least 3.0m above the finished paving level in general. However, at all road crossings, the level of bottom of steel of the gallery shall be at least 8.0m from the top of road surface. The Caged structural steel ladder shall be provided at an interval of 200m for access to the Pipe & Cable Gallery Walkway. Suitable expansion gap shall be provided in the gallery structure by providing twin two-legged trestles at the expansion gap. The expansion gap shall be provided at an interval of 100 to 120m. Expansion gap shall also be provided at location where changes in plan dimensions (gallery width) take place abruptly. At the inter-connection of Pipe/Cable gallery with Plant buildings, Pipe/Cable gallery shall be terminated at a maximum distance of 1.50m from the building. The			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 23 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
	foundation of the Pipe/Cable Trestle shall be constructed at a distance of 4.0M from center line of the plant building. Cantilever of 2.50m shall be taken from pipe-cable trestle structure. (ii) Design Concept: The pipe-cable structure shall be designed as a 3-dimensional space frame for all the relevant load cases mentioned in the design criteria chapter. The gallery being an unclad structure, wind load shall be evaluated based on the projected frontal area of the structural members and cable tray depth. The end portals shall be designed as rigid frames hinged (pinned support) at the base plate level (on top of the trestle column). Deflection of end portal due to wind shall be evaluated at the portal column-rafter joint. The gallery vertical girder shall be designed as simply supported girders on trestles and detailing of end portals shall be done accordingly. The foundation for Pipe-Cable gallery trestles shall comprise RCC pedestals and foundations. The foundations shall rest on virgin soil. In case virgin soil depth is high, the gap shall be filled with PCC (M10 grade). The grade of concrete for RCC footing & pedestals shall be M25. The structural trestles shall not be supported on paving RCC slab.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 24 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.07.12	Drainage & Water Supply Works			
5.07.12.01	Drainage System The drainage arrangements shall be so planned so as to ensure quick disposal of drainage water without stagnation and / or overflow. It is envisaged to clean the conveyor galleries, transfer points, crusher building, penthouse etc. with water periodically. Minimum 4 nos. down comers shall be provided in each transfer house / crusher house. In case of conveyor galleries, the down comer shall be provided at every trestle location. Drainage of the complete coal stock pile, area around stacker reclaimer rails etc. shall be discharged into the coal slurry settling pond. For Conveyors in Main plant area each down comer shall lead the water / coal slurry to RCC pit (of 2 Cu.M capacity) to allow settling of coal. The water from the pit shall overflow into R.C.C drain, which will lead the discharge finally into trunk drain routed alongside the nearby road. For Conveyors in stock pile area, each down comer shall lead the water / coal slurry to RCC pit (of 2 Cu.M capacity) to allow settling of coal. The water from the pit shall overflow into R.C.C drain, which will lead the discharge finally to the coal settling pond. For Crusher House, Pent Houses & TP's in stock pile area, each down comer shall lead the water / coal slurry into the peripheral drains (Brick drains with steel gratings provided around the building) which will lead the water / coal slurry to water / coal slurry to RCC pit (of 2 Cu.M capacity) to allow settling of coal. The water from the pit shall overflow into R.C.C drain, which will lead the discharge finally to the coal settling pond. For TP's in Main plant area, each down comer shall lead the water / coal slurry into the peripheral drains (Brick drains with steel gratings provided around the building) which will lead the water / coal slurry to RCC drain and finally into trunk drain routed alongside the nearby road. For reclaim hopper, peripheral drains (Brick drains with steel gratings provided around the building) shall lead the water / coal slurry to a local RCC pit (of 2 Cu. M. capacity) near each facility to allow settling of coal. The water from the pit shall overflow into R.C.C drain, which will lead the discharge finally to the coal settling pond. In case of Control rooms and M. C. C. buildings, Pump houses, etc, water / coal slurry coming from down comers shall discharge into peripheral drains (Brick drains with steel gratings provided around the building) which will lead the water / coal slurry into R.C.C drain,			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 54 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.07.12.02	which will lead the discharge finally into trunk drain routed alongside the nearby road/ coal settling pond.			
	Suitable kick plates/Curb beams shall be provided around the floor openings, stair case landings, in the transfer points, crusher house and other buildings.			
	Contractor's scope shall also include construction of necessary culverts under the rail lines / roads as per railway / I. R. C. standards and approval of Railway culverts from concern Railway authorities.			
	Internal and external water supply, drainage etc.:-			
	The scope for potable water supply includes all distribution systems, tanks, pipes, fittings etc. as required and as described here or elsewhere in these specifications.			
	The scope for service water supply and dust control water supply shall be as described elsewhere in these specifications.			
	For water supply, medium class galvanized mild steel pipes conforming to IS: 1239 shall be used.			
	The scope for drainage of surface water shall include design, layout and construction of drains for and from buildings and drains required for coal stockyard area, drainage up to main coal slurry settling tank including connection with the tank. Drainage system shall be designed for maximum intensity of rainfall as 75 mm/hr and 60 % runoff coefficient. All buildings (including transfer houses and crusher house) shall be provided with open surface brick drains of minimum size of 300 mm width and 300 mm depth all around the periphery. All drains excepting the peripheral drains around the transfer points, crusher house, control / M. C. C. buildings, pumps house etc., shall be of R. C. C. construction. All open drains shall have removable steel grating designed for loads as specified under loading clause. Minimum size of main bar of grating (Galvanised to 610 gm/m ²) shall be 12 mm x 3mm and cross bars 6mm. At all entry or road/rail crossing point's RCC box/pipe culvert shall be provided. The opening size of grating shall not be more than 90 mm x 35 mm. All drains as well as pre - cast covers shall be provided with edge protection angles and lifting hooks.			
	However, drains in coal stockyard area shall have pre cast R. C. C. covers. RCC pre - cast cover weight shall not be more than 65 Kgs. RCC pre-cast covers near entry or at road crossings shall be designed for 10 T wheel load at centre. RCC pre - cast covers shall be designed for central point load of 75 Kgs.			
	The scope for foul water from toilets shall include layout and laying of sewers up to the Employer's main sewer line for sewerage system together with all fittings and fixtures and inclusive of ancillary works such as connections, manholes and inspection chambers within the building and from the building to the Employer's sewer line.			
For rain water down comer and those to be used for conveying water / coal slurry generated from cleaning of walkway/floors, Galvanised MS pipes conforming to IS: 1239 (for 150 mm NB Medium grade pipes) with welded joints shall be used for MCC buildings, penthouse, control rooms and Galvanised steel ERW pipes (273mm OD, 4mm thk) of steel grade Fe330 conforming to IS: 3589 with welded joints shall be used for all TP's, Crusher house, and Conveyor galleries.				
Galvanising shall be as per IS: 4736. The minimum mass of zinc coating shall not be less than 360 gms/sq.m. as per IS:6745. The zinc coating shall be smooth and shall be subjected				
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 55 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS				
5.07.13	to testing as per IS: 2633, for uniformity of coating. The zinc coating shall be free from all defects as per IS: 2629.				
	All rain water down comers shall be provided with roof drain heads and complete with shoes bends, junctions, sockets, adapters, brackets and finished with anti corrosive painting over a coat or primer.				
	For design of building drainage system IS: 1742 shall be followed.				
	For sanitary / sewerage pipes above ground, sand cast iron pipes conforming to IS : 1729 with leak proof lead joints.				
	For underground drain pipes, minimum class NP - 2 pipes conforming to IS: 458. At road crossings, concrete pipes of class NP 3 conforming to IS: 458 and at rail crossing R.C.C. box culvert to be provided.				
	For sewerage below ground stoneware pipes conforming to IS: 651 with concrete bedding and haunch.				
	Roof Details				
	Roof slab shall be minimum 150 mm thick and shall have minimum 10 dia HYSD reinforcement bars placed at 200 mm center both ways at top and bottom.				
	900 mm high and minimum 100 mm thick R. C. C. parapet wall shall be provided over roofs. Parapet wall shall have suitable coping. External face of parapet wall of the buildings provided with metal cladding shall also be finished with metal cladding of design and colour as per approved architectural drawings.				
	Junction of roof and parapet shall be provided with 150 x 150 mm size concrete fillet.				
Drain level shall be provided with 45 x 45 cm size khurras having minimum thickness of 30 mm of M-15 concrete over PVC sheet of 1 m x 1m x 400 micron and finished with 12 mm 1 : 3 cement : sand plaster.					
Roofs of all M. C. C./control rooms, penthouse etc., shall have roof water proofing treatment. Roof water proofing treatment shall be as follows:					
1) Application of polymerised mastic over the RCC roof to achieve smooth surface as primer coat.					
2) Application of high solid content liquid applied urethane based elastomeric water proofing membrane, over the primer coat, to give uniform joint less dry film thickness of minimum 1.5 mm (as per ASTM C 836 and C 898).					
3) For efficient disposal of rain water, the run off gradient for the roof shall not be less than 1: 100. This gradient shall be provided by screed concrete M-15 (using 12.5 mm coarse aggregate) and / or cement mortar (1: 4) over the elastomeric water proofing membrane with 25mm thick cement mortar (1:4) topping.					
4) Wearing course at top, shall consist of 25 mm thick P. C. C. (M-15) cast in panels of maximum 1.2 x 1.2 m size and reinforced with 0.56 mm diameter galvanized chicken					
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS	PAGE 56 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.07.14	wire mesh and sealing of joints using sealing compound / elastomeric water proofing membrane. Pathways for handling of materials and movement of personnel shall be provided with 22 mm thick chequered cement concrete tiles as per IS : 13801 for a width of 1000 mm in place of P. C. C.			
	Roof of transfer points and crusher house shall be provided with troughed profile permanently colour coated sheet on outside and plain permanently colour coated sheet on inside with 50mm thick mineral wool insulation in between the two sheets. A slope of 1 in 5 shall be provided for quick drainage of rain water.			
	Floors and Grade level details			
	The floor slabs shall be minimum 150 mm thick and shall have minimum 10 dia HYSD reinforcement bars placed at 200 mm center both ways at top and bottom			
	Floors of transfer points shall have cross slope of not flatter than 1: 80, towards the floor washing drainage outlets, for efficient drainage. For ground conveyor & crusher house slope shall be 1:100.			
	Chequered plates (used for platforms, walkways etc.) shall be minimum 6 mm thick o/p or as indicated on drawings. The chequered plate pattern shall be approved by Employer / Engineer. Mild steel flats/angles of suitable size shall be welded to the bottom portion of chequered plates at a designed spacing to stiffen chequered plates to restrict deflection within span/200. Chequered plates shall be fixed by staggered welding of suitable size.			
	Toe guard of size 100 x 6 mm shall be provided at various openings provided in floors e.g. around stair case openings, chute openings and other similar cutouts. For conveyor walkways, angle runner to act as toe guard shall be provided.			
	All along the periphery of R. C. C. floors (where no brick masonry walls are provided) shall be provided with one brick thick 300 mm high brick wall and 700 mm high steel hand rails all around over this brick work.			
	The grade slab shall consists of 230 mm thick rubble soling (63 mm downgraded hard stone aggregate as per IRC specification, watering and compaction to minimum of 90% Standard Proctor density, including filling the interstices of stone aggregates with sand), over well compacted earth, overlaid by 75 mm thick P. C. C. M-7.5 and 100 mm thick R. C. C. of grade M-20 with minimum 8 mm dia bars placed at 200 mm C / C in either direction respectively. There will be minimum 50 mm thick metallic hardener finish over the R. C. C. slab.			
	All buildings (including reclaim hopper, penthouse, MCC rooms, pump houses, transfer houses and crusher house) and ground conveyors shall be provided with 750 mm wide plinth protection all around. It consists of 50 mm thick P.C.C. M-20 grade with 12 mm maximum size aggregate over 200 mm thick stone soling using 40 mm nominal size rammed, consolidated and grouted with fine sand.			
An area of 5 m width all round the reclaim hopper, around water tanks near pump house, transfer houses and crusher house shall be paved. This paving will be in addition to plinth protection. The paving construction shall be as per specifications for the grade slab at ground level. However, 50 mm thick metallic hardener finish is not required to be provided in paved area.				
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 57 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS														
5.07.15	Plinth level of all buildings shall be kept at least 500 mm above the finished grade / formation level.														
	Fencing Fencing with toe wall and steel gates shall be provided around the transformers. Fencing shall comprise of PVC coated GI chain link fencing of minimum 8G (including PVC coating) of mesh size 75 mm and of height 2.4 m above the toe wall. The diameter of the steel wire for chain link fence (excluding PVC coating) shall not be less than 12G. Fence posts shall be of pre – cast R. C. C. of minimum M20 grade. All corner posts will have two stay posts and every tenth post will have transverse stay post. Suitable R. C. C. foundation for the post and stays shall be provided based on prevailing soil conditions. Gates shall be sturdy with locking provisions. Toe walls of brick masonry shall be provided between fence posts all along the run of the fence with suitable foundation. Toe wall shall be minimum 200 mm above the formation level with 50 mm thick P. C. C. coping (1: 1. 5: 3) and shall extend minimum 300 mm below the formation level. Toe wall shall be plastered on both sides and painted with two coats of cement paint of approved colour and shade. Toe wall shall be provided with weep holes at suitable spacing.														
5.07.16	Loading For consideration of loads on structures IS : 875 - 'Code of practice for structural safety of buildings' shall be followed. In addition to the dead load, live load, equipment load (including impact / vibration). Temperature loads etc. various loading conditions arising due to operation and maintenance of equipment shall be considered in the design. The structure and equipment shall also be designed for seismic loads as per the "Criteria for Earthquake Resistant Design of Structures and equipment" and the "Criteria for Wind Resistant Design of Structures and equipment". whichever is governing. Wind and seismic forces shall not be considered to act simultaneously. The following minimum live loads shall be adopted for the design of various structures. If actual expected load is more than the specified load, then actual load is to be considered.														
	<table><tr><td>Roofs</td><td>150 Kgs. / Sq. M. for accessible roofs and 75 Kgs. / Sq. M. for non - accessible roofs. In addition to this coal dust load (Dead load) of 150 Kgs. / sq. m. on flat roofs & 75 Kgs. / sq. m. on inclined roofs shall also be considered.</td></tr><tr><td>R. C. C. floors</td><td>500 Kgs. / Sq. M.</td></tr><tr><td>Stair and balconies</td><td>500 Kgs. / Sq. M.</td></tr><tr><td>Toilet rooms</td><td>200 Kgs. / Sq. M.</td></tr><tr><td>Chequered plate floors</td><td>400 Kgs. / Sq. M.</td></tr><tr><td>Walkways (including walkways in conveyor/cable galleries)</td><td>300 Kgs. / Sq. M.</td></tr></table>				Roofs	150 Kgs. / Sq. M. for accessible roofs and 75 Kgs. / Sq. M. for non - accessible roofs. In addition to this coal dust load (Dead load) of 150 Kgs. / sq. m. on flat roofs & 75 Kgs. / sq. m. on inclined roofs shall also be considered.	R. C. C. floors	500 Kgs. / Sq. M.	Stair and balconies	500 Kgs. / Sq. M.	Toilet rooms	200 Kgs. / Sq. M.	Chequered plate floors	400 Kgs. / Sq. M.	Walkways (including walkways in conveyor/cable galleries)
Roofs	150 Kgs. / Sq. M. for accessible roofs and 75 Kgs. / Sq. M. for non - accessible roofs. In addition to this coal dust load (Dead load) of 150 Kgs. / sq. m. on flat roofs & 75 Kgs. / sq. m. on inclined roofs shall also be considered.														
R. C. C. floors	500 Kgs. / Sq. M.														
Stair and balconies	500 Kgs. / Sq. M.														
Toilet rooms	200 Kgs. / Sq. M.														
Chequered plate floors	400 Kgs. / Sq. M.														
Walkways (including walkways in conveyor/cable galleries)	300 Kgs. / Sq. M.														
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 58 OF 234											

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	Conveyor galleries Road Culverts and its allied structures including R. C. C. pipe crossing & road crossing of trenches. Channels / trenches Covers for trenches / channels Sumps and tanks and other underground basement type structures Unit weight of coal shall be taken as 1100 Kgs. / cum. for design purposes. If the erection load is higher than the specified live loads on any floor or part thereof, then the erection loads are to be considered for the design. Permissible increase in stresses of materials and bearing pressure of soil due to wind load or seismic load shall be as per relevant I. R. S. and I. S. code.	In addition to the live loads, loads due to cable trays, fire fighting / service water pipes shall also be considered @ 125 Kgs. / m (minimum) on each of the longitudinal girder. Roof-truss members are to be checked for supporting fire fighting pipes/ Service water pipes. Tentative locations and diameter for pipes are shown in Tender Drawing. For class 'AA' loading and checked for class A loading as per IRC standard. In addition to earth pressure and water pressure, etc. additional earth pressure due to surcharge of 2T / Sq. M. shall also be considered for design. Covers for channels & trenches, shall be designed for a live load of 0.4T Sq. M. and loading as mentioned under clause in trenches, whichever is critical. In addition to earth pressure with a surcharge of 2T / Sq. M. (or surcharge due to Railway loading whichever is critical for Railway load bearing structures etc.) and sub - soil water pressure etc. These are also to be designed for the following conditions : i) Water / liquid inside and no earth outside (applicable only to such structures which are liable to be filled up with water or any liquid). ii) Earth with surcharge outside and no water / liquid inside iii) For underground (basement) structures protection against buoyancy during execution and after execution shall be ensured without superimposed loadings with minimum factor of safety of 1.2 against buoyancy.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 59 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.07.17	Design Criteria			
	The loads for all railway load bearing structures and the analysis and the design of these structures (if any) shall be made strictly in accordance with the provisions of Indian Railway Bridge rules (latest edition), and Indian Railway Codes of practice (latest edition) with all amendments up to the date of opening of bids. The axle load for analysis and design shall be considered as “DFC loading (32.5t axle load)” of Heavy mineral loading as per Indian railway standard. The analysis, design and detailed drawing for tunnel, under ground transfer houses, culverts etc. coming directly below the railway track shall be got approved by the contractor from the concerned railway authorities before taking up construction. All necessary payment for the above work shall be made by the bidder to the railway authority.			
	The design of all R. C. C. structures shall be carried out as per ‘code of practice for plain and reinforced concrete for general building construction’, IS: 456 (latest).			
	The steel structures shall be designed and fabricated as per ‘code of practice for use of structural steel in general building construction’, IS : 800 and other relevant IS Standards. Minimum size of the angle section to be used as structural members shall be 50 X 50 X 6. Minimum weld size shall be 6 mm. The steel structures using tubular sections shall be designed and fabricated as per IS:806-“code of practice for use of steel tubes in general building construction.” And EN 1993-1-8:2005. Minimum grade of steel & thickness of Tubular/Hollow sections shall be Yst 240 Mpa & 4.0mm respectively.			
	The building shall conform to local bye - laws, rules and regulations for industrial buildings and also B. I. S. publications, SP 32 and 41.			
	Slotted holes shall not be assumed to act as expansion joint for relieving of stresses and suitable bearings shall be provided at the supports.			
	All gallery supporting trestles shall be so proportioned that the transverse deflection of gallery due to wind / seismic load should not exceed trestle height / 1000 as stipulated in IS: 11592. This deflection condition shall be strictly followed. Peak wind speed method shall be considered for checking the transverse deflection.			
	The crusher and transfer house structures shall be so designed that transverse deflection at places where conveyor galleries meet, should be equal to the respective transverse deflection of conveyor supporting trestles.			
	Stresses for all CHP structures shall be checked for the higher of the forces obtained from gust factor method and the peak wind speed method.			
	The permissible vertical deflection for beams supporting drive machinery shall be restricted to span / 500 and for other beams it shall be within span / 325.			
Horizontal bracing system shall be provided at floor levels around the openings.				
Shear force in steel columns shall be transferred to the pedestals / foundations exclusively either through foundation bolts or the shear key arrangement.				
For design of liquid retaining structures, IS : 3370 (Part - I to IV) (latest) shall be followed. Face of the structure in contact with liquid shall be designed as un - cracked section. For design of R. C. C. pipes for culverts, latest editions of IS: 458, IS: 783 should be followed.				
For design of all underground structures / foundations, ground water table shall be assumed at the formation level (i. e. the adjoining ground level).				
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 60 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.07.18	Design of Hopper walls shall be done for both Static & Dynamic flow condition using Walker's theory. Design of masonry walls shall be made as per IS : 1905. Civil task drawing indicating various equipment loading and supporting arrangement and floor loads to be submitted along with the design calculation. For metal roofing and side cladding, the spacing of purlins/runners shall be such that the deflection of metal sheet used is limited to span/250 under adverse loading condition. Minimum reinforcement shall be provided at the top face of the footing, even if, no reinforcements are required as per design.			
	CHEMICAL INJECTION GROUTING Minimum, 12 mm dia (NB) threaded nozzle of suitable length, shall be provided over the surface and along the construction joint line in a grid pattern at a spacing not exceeding 1.5 m c / c before concreting operation. Adequate precaution shall be taken to keep the nozzles plugged at both ends to prevent them from getting closed by concrete. For fixing of any nozzle in set concrete suitable size hole shall be drilled, preferably by using percussive hammer drill electrically operated, in grid pattern and grouting nozzle shall be fixed in these holes. After the nozzles are fully set, neat cement slurry admixed with water soluble non - shrink polymer / monomer based chemical shall be injected through the net - work of nozzles with low pressure grout pumps at a pressure of about 2.0 Kgs. / cm². Cement slurry shall be prepared by mixing cement with non-shrink polymer/monomer @ 500 gm/50 kg bag of cement and water, ensuring that Water: Cement ratio does not exceed 2 (by weight). Wetter the structure, lesser should be the water cement ratio. The property of the polymer/monomer should be such that when it is mixed with water @0.5% by weight of water, the viscosity of the resultant solution (water and polymer/monomer) should not be more than 1.2 centipoises. Plasticizing agent shall be added wherever required. The grouting shall be started at very low pressure and increased gradually to a required pressure. The grouting shall continue, till the hole refuses to take any further grout, even at an increased pressure. Applied pressure shall not be more than the designed strength of the concrete. After completion of grouting operation, the nozzles shall be sealed properly to the satisfaction of the Engineer.			
5.07.19	POLYMER MODIFIED CEMENTITIOUS COATING			
5.07.19.01	Materials Modified liquid polymer blend shall be a dispersion containing 100 % acrylic based polymer solids. Polymer shall be mixed in the ratio of 1 cement: 0.5 polymer (for minimum solid content of polymer 30%). Portland cement based dry powder. Clean, fine specially prepared quartz sand approximately 0.6 mm size.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 61 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.07.19.02	Mixing	The liquid polymer shall be stirred well and cement based powder shall then be added slowly to make a Slurry Mix. For preparation of Brush Topping Mix, quartz sand shall be added slowly and mixed well till a homogeneous mixture is obtained. The mix shall be used within half an hour of the preparation. Addition of quartz sand may not be necessary, in case dry power contains the same.		
5.07.19.03	Properties of Coating	It must adhere to wet surface. It should develop adequate bond strength, with the concrete surface, not less than 2 N / Sq. mm. Co - efficient of permeability shall be about 5x10 ⁻¹⁰ Cm / Sec. Water absorption after continuous soaking shall not be more than 1 %. The materials shall be permeable under water vapour. The material shall be resistant to acids and alkalies present in the soil and underground water with normal pH value between 4 and 14. The co - efficient of thermal expansion of the material shall be close to that of concrete.		
5.07.19.04	Application	The concrete surface shall be cleaned and made free from grease, oils or loosely adhered particles. The surface shall be damp without any free water. For exterior underground part, application (b) pertaining to Brush topping Mix shall be followed. (a) For Slurry Mix A minimum of 2 coats shall be applied on the surface. The first coat being applied, when the surface is still damp and left to harden for 4 to 6 hours. After 4 to 6 hours of the application of second coat, it shall be finished by rubbing down with a soft dry sponge. The coverage shall not be less than 1 : 1 Kgs. / m ² in the 2 coats. A lap of 75 mm shall be provided at the joints. The coating shall be air dried for 4 to 6 hours and, thereafter, cured for 7 days after the application of last coat. (b) For Brush Topping Mix This shall be applied in two coats. A primary coat of slurry mix can also be first applied on the surface as first coat. After the coating has dried up, a coat of Brush Topping Mix shall be applied over it with a push broom or any other similar brush. It		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 62 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.07.20	shall be left in broom finished condition. The nominal thickness shall be 1.5 mm and minimum thickness shall be 1.0 mm. A lap of 75 mm shall be provided at the joints. It shall be ensured that no pinhole exists and rebrushing shall be done to cover the pinholes, if any. The Coating shall be air dried for 4 to 6 hours and thereafter cured for 7 days after the application of last coat. Rate of application of coating shall be established to achieve the required thickness.			
	SHOTCRETING			
5.07.20.01	General Requirements Generally, shotcreting shall be done in accordance with IS : 9012. Reinforcement for shotcreting shall be as detailed below, unless specified otherwise. Reinforcement in one direction consisting of 6 mm M. S. bars at 750 mm c / c shall be connected to the lugs for fastening of the wire fabric. This shall be used in case of 50 mm or above thick shotcreting. Wire fabric conforming to IS : 1566 shall be used as reinforcement and shall consist of wire, 3 mm diameter, spaced 50 mm both ways and shall be electrically cross welded. Wire fabric shall be securely tied to 6 mm bars for 50 mm thickness. Adjacent sheet of wire fabric shall be lapped at least 100 mm and tied. Clear cover to reinforcement mesh shall not be less than 15 mm. Minimum thickness of shotcreting shall be 50 mm. for abrasion resistant work and 25 mm for ordinary surface protection work.			
5.07.20.02	Material Generally, the materials shall be in accordance with aggregates specification given hereunder. Fine aggregate shall consist of natural sand or crushed stone from a known source and shall be strong, hard, coarse, sharp, chemically inert, clean and free from any coating. It shall be			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 63 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 			
5.07.20.03	free from clay, coal or coal residue, organic or any other impurities that may impair the strength or durability of the concrete and shall conform to IS : 383. Fine aggregate (Sand) shall be well graded and particles shall range in size within the following limits. The Engineer, may approved the use of any other grading as per requirement or as per IS : 9012. The fineness modulus shall be preferably between 2.5 and 3.3. Any other value can be used, with prior approval of the Engineer. Application After the placement of reinforcement and / or welded mesh and not more than six hours prior to the application of shotcrete, the surface shall be thoroughly cleaned of all loose materials and dirt. The Contractor shall properly prepare the surfaces, reinforcement and / or welded mesh to receive the shotcrete. Cleaned surfaces shall be wetted not more than hour prior to shotcreting. The mix as placed on surface shall be one part cement to three parts approved sand by mass. Cement and sand shall be dry mixed; not water shall be added after mixing and before using in the gun. The quantity of water when added shall be only that which is sufficient to hydrate the cement. For average atmospheric conditions, the water cement ratio for shotcrete in place shall be between 0.35 and 0.5 by mass. Suitable admixture shall be used wherever required. A uniform pressure of not less than 3 Kg/cm² at the nozzle shall be maintained. Necessary adjustments shall be made to ensure this pressure, taking into account the length of hose and height of the place to be shotcreted, above location of the machine. The application shall proceed in an upward direction. Beams, stiffeners and intermediate walls, if any, shall be wrapped with wire fabric and completely covered with shotcreting. All rebound shall be removed from the area of application as the work progresses and such rebound material shall not be reused. As soon as the freshly shotcreted surface shows the first dry patches, a fine spray of water shall be applied to keep too moist. After the surface has hardened, it shall be kept continuously moist for minimum seven days. If there is extreme heat, especially when accompanied by hot winds, the shotcreted surface, immediately upon completion, shall be covered with burlap or similar covering, which must be kept continuously moist for 14 days after shotcreting. The temperature of the lining shall not be permitted to exceed 38oC during placing and curing.			
5.07.21	VIBRATION ISOLATION SYSTEM These specifications are meant for the design, supply and erection of vibration isolation system for supporting coal crushers (ring granulators).			
5.07.21.01	Supporting Arrangement The crushers shall be supported on vibration isolation system consisting of steel helical springs and viscous dampers. The supporting arrangement for each crusher shall consist of an R. C. C. deck supported on steel helical spring units and viscous damper units which in			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 64 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	turn shall be supported on girders. The girders shall be an integral part of the crusher house building. The part of the structure consisting of the R. C. C. deck, springs and viscous dampers shall hitherto be referred to as “spring supported foundation”. The part of the structure, which is below the spring shall hitherto be called “supporting structure”.			
5.07.21.02	The Contractor should do the Engineering / design, supply and erection of vibration isolation system consisting of steel helical spring units and viscous dampers supporting the top deck which in turn would support the coal crushers. The vibrations isolation system supplied shall be of a proven make. The Contractor or his sub - contractor who designs and supplies the system should have designed, supplied and installed such systems for not less than five machines of speeds and unbalance forces comparable to the machine proposed by the vendor. The vibration isolation systems installed by the contractor or his sub - contractor in such machines should have been working satisfactorily for atleast five years.			
5.07.21.03	Engineering Design of the vibration isolation system using steel helical springs and viscous dampers to support an R. C. C. top deck supporting the coal crusher. This includes the static and dynamic analysis of the vibration isolation system with the R. C. C. top deck and the coal crusher. Structural design of the R. C. C. top deck including preparation of General Arrangement drawings, detailed reinforcement drawings, bar - bending schedules etc. Calculation of loads on the structure supporting the springs and viscous dampers, their points of application and the stiffness requirements of the supporting structure. Drawings showing embedments and their locations and details on the R. C. C. top deck. Drawings showing blockouts, recesses etc. on the top deck.			
5.07.21.04	Design of the supporting structure, including preparation of detailed drawings and bill of materials. Supply including packing and transportation to site Steel helical spring units and viscous dampers, including associated auxiliaries for installation of the spring units and dampers like steel shims, adhesive pads etc. Frame (s) for pre-stressing of spring elements.			
5.07.21.05	Suitable hydraulic jacks system including electric pumps, high pressure tubes etc. required for the installation, alignment etc. of the spring units, two extra hydraulic jacks, one hand operated pump and spares for the hydraulic jack system as required. Erection and Commissioning Complete erection and commissioning of the vibration isolation system including : Pre-stressing of spring elements, placing of spring elements in position, checking clearances on the shuttering of the R. C. C. top deck, construction of the supporting structure and the R. C. C. top deck, releasing to pre-stress in spring elements and making final adjustments and alignments after machine installation etc.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 65 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.07.21.06	The scope of work shall be deemed to include all activities which may not have been explicitly mentioned but are reasonably implied for the successful completion of the work for which these specifications are intended.			
	This part of the specifications is for vibration isolation system. For the construction of the supporting structure for the crusher and the top deck, the relevant parts of the specification should be referred to.			
	Documentation			
	Submission of detailed design calculation, analysis (static and dynamic) and drawings for Employer's acceptance and approval.			
	Furnishing methodology of providing shuttering and its removal as well as concreting of deck slab, installation of springs and dampers and the sequence of operation.			
	Furnishing installation and maintenance manual indicating equipment, procedure etc., necessary for installation, maintenance of vibration isolation system.			
	Furnishing a check list for confirming the readiness of the civil fronts for the installation of vibration isolation system and equipment required at each stage installation.			
	Bill of materials of various elements such as springs, visco-dampers, with their rating, stiffness etc., included in supply.			
Detailed specifications of the vibration isolation system and various items included in the supply and the standard (local or international) to which they conform.				
Proposed erection strategy of the entire system.				

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.10	Plant Storm Water Drainage System & Rain Water Harvesting Plant storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc with a return period of 50 years. These values shall be based on the "Detailed Area Drainage Study" subject to minimum rainfall intensity of 75mm/hr. All RCC drains shall be either RCC Cast-in-Situ or RCC Pre-cast drains. The minimum grade of concrete shall be M25 for RCC Cast-In-Situ drains and M30 for RCC Pre-cast drains. The maximum velocity for RCC open drains shall be limited to 1.8 metre per second. However, minimum velocity of 0.6 metre per second for self - cleansing shall be ensured. Bed slope not milder than 1 in 1000 shall be provided. Open RCC rectangular section, unless required otherwise due to functioned requirement, shall be provided for all drains. The thickness of side walls and bottom slab of RCC drains shall be minimum 200 mm or as per design considerations whichever is higher. The drains shall be provided on both sides of the double lane roads and single lane roads. The drains shall be provided on one side of the patrol roads. These shall be designed to drain the road surface as well as all the free and covered areas, etc. Box culverts shall be provided at all rail, road and other crossings. RCC drains located within and along both sides of peripheral roads of the main plant shall be covered with perforated precast RCC slabs of minimum 50 mm thickness with provision of openable galvanized steel grating covers at about 4.0 metre intervals. Similarly all artillery drains and the drains along the periphery of all buildings shall also have perforated precast RCC cover of minimum 50 mm thickness with provision of openable galvanized steel grating covers at about 4.0 metre intervals. In areas where vehicular loads would be coming, precast RCC covers of suitable thickness without perforations and designed for the vehicular loading shall be provided. All drains in the main plant area shall be provided with heavy duty galvanized steel grating. All drains inside the building shall have minimum 40 mm thick grating covers. In areas where heavy equipment loads would be coming, precast RCC covers shall be provided in place of steel grating. The invert levels of the in-plant and plant peripheral drains shall be kept such that water can be discharged by gravity to the main / trunk drains under all conditions. The invert levels of the drains shall be decided in such a way that the water can easily be discharged to the natural water bodies above the high flood level.			
5.11	Diversion of Existing Drainage and Discharge Of Plant Drainage into Natural Drainage System All existing drains crossing the project / site shall be diverted suitably and shall be discharged into a natural drainage outside plant boundary. The controlled drainage from plant area and ash pond shall also be discharged at a single point. The final disposal point shall be same which is indicated for diverted drains. Bidder scope shall be upto an existing natural drain/ natural stream. All external discharge / diversion drains shall be in trapezoidal section lined with 150mm thick RCC in M20 grade concrete.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 73 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
5.12	The controlled drainage from plant area and ash pond including the discharge of all existing drains crossing project/site shall be discharge in natural drain / natural stream. Roads All roads shall be of rigid pavements unless otherwise specified. The design of rigid pavement shall be carried out as per IRC: 58. The effects of design wheel load, maximum tyre inflation pressures, tyre contact area for the vehicle, traffic loads, environmental factors such as temperature changes in the pavement, other factors, like impact, load repetitions, etc., are to be taken. Detailed plate load tests to determine the modulus of sub grade reaction “K” shall be carried out as per the procedure outlined in IS: 1888. The design traffic load shall be a minimum value of 4 million standard axles. The road shall be designed for 30 years of life and considering a minimum traffic growth rate of 1 per cent per annum. The concrete pavement for roads shall be minimum 250 mm thick slab. The road construction including its shoulders, base, sub base and concrete pavement shall be as per IRC standards. IRC: 58 shall be followed for the pavement design and IRC: 15 shall be followed for the construction of the concrete pavement. The road base shall be with minimum 150 mm thick dry lean concrete over granular sub base. Dry lean concrete shall be laid by a mechanical paver and compacted by vibratory rollers. Concrete pavement of the road shall be done with fully mechanized paver fitted with electronic sensors for construction techniques. Dry lean concrete shall be minimum M10 grade and concrete pavement slab shall be minimum M35 grade concrete. The finished top (crest) of all roads shall be 350 mm above the surrounding finished ground level. The sub grade under all roads and its shoulders shall be compacted to achieve 95 per cent or more of Standard Proctor’s Density MDD using mechanical means. Cutting / extending / rerouting / remaking of existing roads including associated works to maintain continuity of road system / network shall also be carried out. All culverts and RCC bridges at crossings of all roads / rail tracks / facilities with drains / nallahs / channels / roads / rail tracks / pipes / other facilities, etc. are to be designed and constructed. Unless otherwise specified, all roads (excluding access roads to all buildings / facilities / structures, patrol road along boundary wall and road inside the switchyard) shall be double lane roads. 5.12.01 Double lane roads: The double lane roads shall be (12 metres wide) with 7.5 metres wide concrete pavement and 2.25 metres wide raised shoulders on both sides of the roads. The raised shoulders (on both sides of the road) shall comprise of 75mm thick inter locking precast designer concrete blocks (M35 grade) at the top, over 20 mm thick sand layer. A 200mm diameter NP3 pipes shall carry the surface water from the road through a PCC drain trench (M20) on both sides of the roads to the drain. The pipes shall run over PCC (M 20) continuous cradle bedding. The pipes shall be laid at 10 metres centre to centre. A layer of 100 mm (average) thick PCC (M15) shall be laid over the pipes and below the sand layer. All roads shall be provided with edge protection on both sides of the road using pre - cast kerb		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 74 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS				
5.12.02	blocks (450 mm long x 250 mm wide x 500 mm deep) (M25) laid in 1 (cement) : 6 (coarse sand) cement mortar.				
	Single lane roads:				
	All access roads to all buildings / facilities / structures, road approaches / connections, access roads to liquid fuel storage areas and other equipment areas where access is necessary from inspection, operation and maintenance point of view and all roads inside the switchyard shall be single lane roads. These shall be single lane roads (6.75 metres wide) with 3.75 metres wide concrete pavement and 1.5 metres wide shoulders on both sides of the roads. The shoulders shall also have 150 mm thick dry lean concrete and 75 mm thick inter locking blocks over compacted granular sub base of two layers of 75mm thick WBM grade III 53-22.4mm. All roads shall be provided with edge protection on both sides of the road using PCC blocks (300 mm long x 250 mm wide x 150 mm deep) (M25) laid in 1 (cement) : 6 (coarse sand) cement mortar.				
	5.12.03				
	Patrol roads:				
5.13	All patrol roads along the boundary wall shall be single lane roads with 3.75 metres wide concrete pavement and 1.5 metres wide shoulders on one side of the road. The shoulders shall also have 150 mm thick dry lean concrete and 75 mm thick inter locking blocks over compacted granular sub base of two layers of 75mm thick WBM grade III 53-22.4mm. All roads shall be provided with edge protection on both sides of the road using PCC blocks (300 mm long x 250 mm wide x 150 mm deep) (M25) laid in 1 (cement) : 6 (coarse sand) cement mortar. The road shall slope towards the inner drain. The centre line of the black top of the road shall run at a distance not less than 2625 mm from the centre line of the boundary wall.				
	5.13.01				
	5.13.02				
	5.13.03				
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS	PAGE 75 OF 234

CLAUSE NO.

TECHNICAL REQUIREMENTS



THIS PAGE IS INTENTIONALLY LEFT BLANK.

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.15	Main Gate Complex & CISF Building The Gate Complex shall comprise two (2) mild steel vehicle entry gates of minimum 8.0m width and height 3.0m and shall be electrically operated. Minimum one room for security personnel shall be located at each end of the gates. Two (2) separate mild steel pedestrian gates minimum 3.0m high and 3.0m width shall be provided at the each end. The Central Industrial Security Force (CISF) Building shall be a two (2) storied RCC super structure with office complex in ground floor & first floor. The building shall be constructed with 230mm thick brick wall with provisions for doors, windows & ventilators. The first floor shall also have a viewing gallery. The floor area and architectural details shall be as per the Arch spec. mentioned hereafter in this Specification.			
5.15.01	Design Concept: The CISF building shall be designed as moment resisting sway frame in both orthogonal directions and shall be designed as per IS: 456, IS: 1893 and IS: 13920 (for seismic ductility requirement) and as per design criteria mentioned hereafter in this specification.			
5.15.02	Architectural Features The CISF Building shall be 2-storied building. It shall be of RCC Frame structure & Brick masonry. The floor area of this building shall be minimum 700 sq m The Gate Complex and CISF building shall have sufficient no: of guards rooms to regulate movement of men and material and overall security, using latest modern technology like turnstile type/ boom type access control with magnetic cards and close circuit TV sets, computerized time and security office, etc shall be made. For any other gate provided for entry or exit, provision for a suitable small security hut/shed shall be made. Space provision for CISF personal staff, time office including time machine, reception, lounge, Arms store, Detention Room, Conference room, Toilets and pantry shall be provided as per functional requirement including toilets for Ladies, Gents, Physically handicapped. In addition, provision for space for open parking (for trucks, cars, scooters, cycles) and covered parking for staff shall be provided. External finishing shall be of solvent based exterior paint & Aluminium Composite Panel combination.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 77 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
5.15.03	Gates along Boundary Wall: The gates shall be provided at the entry & exit points of ash bunker movement road, at the entry of railway line, at the entry of material access road to the plant, at the entry of plant from township. No. of gates in Bidder's Scope are as identified in General Layout Plan Drawing No.: 4410-999-POC-F-001. The gate shall comprise of two mild steel double panelled openable shutter of minimum 7.75 m clear width and minimum height of 3.0m from top of road. The gate shall be complete with fabricated hinges, MS aldrops with locking arrangement, tempered steel pivot, guide track of MS tee, bronze aluminum ball bearing, castor wheel etc. All gates shall be given anti-corrosive treatment in three coats. The structural steel shall confirm to IS: 2062 (latest) and all other relevant IS codes. Beside the each gate one room of size not less than 3m X 3m shall be provided for security guards. The room shall be made of brick/ RCC and with RCC roof. In addition to the room, one toilet block shall also be provided.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 78 OF 234



CLAUSE NO.

TECHNICAL REQUIREMENTS

5.24

Area Paving in Main Plant Block

RCC paving of minimum 150 mm thick with M25 grade concrete, over an underbed as specified herein shall be provided for areas mentioned below. RCC paving shall be designed as rigid reinforced concrete pavement for the crane/ vehicular/ equipment movement loads which the paving has to bear. The underbed for paving shall consist of

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	preparation and consolidation of sub-grade to the required level, laying of stone soling of 200mm compacted thickness for normal duty paving and 400mm compacted thickness for heavy duty paving with 63 mm and down aggregate with interstices filled with selected moorum followed by 75 mm thick PCC of M7.5 grade with 40 mm nominal size aggregate. Paving areas shall be provided with the metallic hardener floor finish as specified elsewhere in the specification. Entire main plant area from chimney to transformer yard as enclosed within the periphera roads of the main plant area shall be provided with paving (on chimney side, paving shall be upto the edge of the storm water drain by Bidder. Passages shall be provided inside the main plant block connecting to the outer periphery road to have access to the various facilities/buildings. The passage areas shall be provided with heavy duty paving for movement of heavy vehicles. The top surface of the passages shall be finished with 50 mm thick metallic hardener topping. Heavy duty paving shall be provided for the areas in the Mill bunker building, equipment lay down area in the TG hall and handling areas for PA/FD fans with 50 mm thick metallic hardener topping. The ground floor area in the boiler shall be provided with normal duty paving and shall be finished with 50 mm thick metallic hardener topping. Lightly loaded areas such as corridors below trestle and other areas in the main plant block where no heavy traffic movement is envisaged shall be provided with interlocking concrete block paving with RCC concrete blocks of minimum M 35 grade and minimum 80 mm thickness underlain by 200mm thick with 63 mm and down aggregate with interstices filled with selected moorum. All other area inside the main plant block shall be provided with normal duty paving. 2.5 m wide paving around periphery of all sumps and underground tanks without metallic hardener shall be provided. Suitable drains shall be provided to dispose off storm water as well as floor wash of the main plant block. The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain. Drains shall be provided to dispose the floor wash water of ESP to a sump of suitable size. Further, the overflow from the sump shall be drained to the nearest storm water drain. Sewer lines (Cast Iron), interconnected by sewer manholes (RCC) at regular intervals (not exceeding 30 meter centre to centre) shall be provided to dispose off sewage from ESP area, Main Plant Building, Control Room, CD bay & transformer yard area to sewage treatment plant.			
5.25	Hydrogen Generation Plant Building			
5.25.01	Architectural Features:			
	This building shall be RCC Frame structure with brick masonry. The area of the building shall be as per functional requirement. This building falls under hazardous building category. The entire building campus shall be properly fenced to prevent unauthorised access.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 84 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			एनटीपीसी NTPC
7.04	Excavation, Filling and Dewatering			
7.04.01	For excavation works, comprehensive dewatering with well point or deep wells arrangement, if required, shall be adopted. Scheme for dewatering and design with all computations and back up data for dewatering shall be submitted for the owner’s information. The water table shall be maintained at 0.5m below the founding depth .			
7.04.02	Excavation for shallow foundations shall be covered with PCC immediately after reaching the founding level. In case of any local loosening of soil or pockets are encountered at founding level during excavation the same shall be removed and compensated by PCC M 7.5. The final layer of about 300 mm thickness above the founding level shall be excavated by suitable means, so as to avoid disturbance to founding stratum.			
7.04.03	Backfilling around foundations, pipes, trenches, sumps, pits, plinths, etc. shall be carried out with approved material in layers not exceeding 300 mm compacted thickness (higher thickness of layers upto 500mm with heavy mechanical compacting equipment) and each layer shall be compacted to 90% of standard proctor density for cohesive soils and to 75% of relative density for non cohesive soils. In any case, black cotton soil shall not be used in back filling without providing cushion of 1m of non expansive cohesive soil / moorum around the footings. In case of roads in the area of black cotton soil, minimum 0.4m moorum shall be provided.			
7.04.04	The founding level for trenches/channels shall be decided as per functional requirement. The bottom of excavation shall be properly compacted prior to casting of bottom slab of trenches / channels.			
7.04.05	CBR tests for pavement/road design shall be carried out by the Contractor after earth filling (if applicable) has been completed upto the formation level.			
7.05	Sheeting & Shoring			
	The contractor shall ascertain for himself the nature of materials to be excavated and difficulties, if any, likely to be encountered in excavation, executing the work. Sheet piling, sheeting and shoring, bracing and maintaining suitable slopes, draining etc. shall be provided and installed by the Contractor, to the satisfaction of the Engineer.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 114 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.00.00	GENERAL SPECIFICATION			
8.01.01	Joints in Concrete Structures			
	Construction Joints			
	All horizontal construction joints shall be provided with a groove (shear key) for transfer of shear force.			
	Expansions Joints			
	In case of expansion joints, preformed bitumen impregnated fibre board conforming to IS:1838 shall be used as joint filler. The joints shall be sealed with bitumen sealing compound conforming to IS: 1834, however in case of liquid retaining/carrying structures, two parts polysulphide sealant conforming to IS:12118 or silicon sealing compound shall be used.			
	IS:3414 shall be followed for details of joints in buildings. 3 mm thick stainless steel strip in matt or buff finish shall be provided over building expansion joints.			
8.01.02	All steel sections and fabricated structures, which are required to be transported on sea, shall be provided with anti corrosive paint before shipment to take care of sea worthiness.			
8.01.03	A screed or concrete layer not less than 100 mm thick and of grade not weaker than M 10 conforming to IS: 456 shall be provided below all water retaining structures.			
8.01.04	Minimum 75mm thick lean concrete M-7.5 shall be provided below all other underground structures, foundations, trenches, etc., to provide a base for construction.			
8.01.05	Monorails, monorail girders and fixtures shall be provided, wherever required to facilitate erection / maintenance of equipment.			
8.01.06	Wherever possible all floor openings shall be provided with 100 mm thick 150 mm high RCC kerb all around.			
8.01.07	Angles 75 x 75 x 6 mm (minimum) with 8mm dia and 150mm long MS lugs @ 150 c/c shall be provided for edge protection all around cut outs/openings in floor slabs. Angles 50 x 50 x 6mm with effective anchor lugs shall be provided for edges of concrete drains supporting grating/covers, edges of RCC cable / pipe trenches supporting covers/chequered plates/ grating, edges of manholes supporting covers, supporting edges of precast RCC covers and any other place where breakage of corners of concrete is expected.			
8.01.08	Floor of switchgear room shall be provided with embedded M.S. channel suitable for easy movement of breaker panels.			
8.01.09	Anti termite chemical treatment shall be given to all vulnerable areas susceptible to termite including column pits, wall trenches, foundations of buildings, filling below the floors, etc., as per IS: 6313 and other relevant Indian Standards.			
8.01.10	Trenches located outside the buildings shall project at least 200mm above the finished formation level unless noted otherwise elsewhere in this specification so that no storm water shall enter the trench. The bottom of the trench shall be provided with a longitudinal slope of 1:500.The downstream end of cable trenches shall be connected through pipe drains to the nearby RCC manholes (to convey water from trenches) of storm water drainage system, but avoiding back flow of storm water. The precast covers shall not be more than 300 mm in width and shall not weigh more than 65 kg. Lifting hooks shall be provided in the precast covers. The trenches shall be given a slope of 1 in 250 in the direction perpendicular to the			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 120 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	run of the trenches. PVC water stops shall be provided at all expansion joints of all trenches. Trench covers near entry or at road crossings shall be designed for 10 T wheel load at centre. Pre - cast covers shall be designed for central point load of 75 Kgs. R. C. C. cable slits shall be filled with sand after erection of cables, up to top level and covered with pre - cast R. C. C. covers.			
8.01.11	All steel platforms above grade shall be provided with 100 x 6 thick kick plates at edge of platform.			
8.01.12	Duct banks consisting of PVC conduits conforming to IS:4998 for cables shall be provided with proper sealing arrangement consisting of fire retardant sealing compound.			
8.01.13	Independent network of lines for sewerage and drainage shall be provided.			
8.01.14	The sub-grade for the roads and embankment filling shall be compacted to minimum 95% of the Standard Proctor density at Optimum moisture content (OMC.)			
8.01.15	Detailed scheme for dewatering shall be prepared, wherever required, before starting of deep excavation work. IS: 9758 shall be followed as general guidance for dewatering.			
8.01.16	Structural steel column base plates and bolts, gussets, etc., shall not project above the floor level. These shall be encased by concrete cover upto floor level with concrete grade M 30.			
8.01.17	Non-shrink flowable grout shall be used for under-pinning work below base plate of columns. Nominal thickness of grout shall be 50 mm. Non-shrink cum plasticizer admixture shall be added in the grout. Crushing strength of the grout shall generally be one grade higher than that of the base concrete. Minimum grade of grout shall be M-30. However, for equipment foundations, high strength (minimum characteristic compressive strength of 60 N/mm ² at 28 days) ready mixed non-shrink, chloride free, cement based, free flowing, non-metallic grout as recommended by equipment manufacturer shall be used.			
8.01.18	Fencing for fuel oil area, switchyard, and transformer yard area shall be of the same type as specified, elsewhere in this specification.			
8.01.19	Plant effluent shall not be mixed with either storm water or sewage.			
8.01.20	Rail-track in transformer yard area shall be provided with rigid type RCC foundation. Rail weighing 52 kg/m shall be used.			
8.01.21	All building shall be design to take care of Rain Water harvesting & ground water recharging.			
8.01.22	Ground Floor Slab & Area / Pathway Paving: For Ground floor / Area paving or path - way having earthen sub-grade, the paving work shall consist of following parts i.e. 150 mm thick RCC M - 25 Grade base slab, 75 mm thick PCC M7.5 Grade 275 mm thick (compacted thickness) stone / rubble soling sub base with 63 mm down aggregate compacted to 85% of original volume and interstices filled with well graded selected sand on compacted and dressed sub - grade. Reinforcement of the RCC slab shall consists of minimum 8mm dia bars @ 200 mm c / c at top in both directions.			
8.01.23	As required suitable steel frames shall be provided around openings in the roof and external walls for mounting exhaust fans.			
8.01.24	All foundation embedments, inserts, blockouts required for mounting of equipments and supporting any other facility like pipes etc. shall be provided.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 121 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS	एनटीपीसी NTPC	
8.01.25	Grouting of all pockets, blockouts, sleeves and the openings around the embedment, inserts, bolts etc. and under pinning below the base / sole plate shall be with non - shrink flowable grout. Grade of grout shall be one grade higher than concrete. However minimum grade of grout shall be M - 30.		
8.01.26	All cable trenches shall be provided with suitable insert plates for fixing support angles of cable trays.		
8.01.27	All internal cable trenches shall have minimum 6mm thick (o / p) chequered plate covers while external cable trenches shall have pre - cast RCC covers. However, the portion of the cable trench behind and sides of control panel / MCC shall be provided with suitable chequered plate covers as directed by the Engineer.		
8.01.28	All foundations and surfaces of substructures coming in contact with earth shall be applied with three coats of hot applied industrial bitumen conforming to IS : 702 (latest), of Grade 85 / 25, at the rate 1.7 Kg / Sq.m / coat.		
8.01.29	All the liquid retaining structures shall be tested for water tightness with full water level in accordance with IS : 3370 (Part - I).		
8.01.30	All structures receiving acid / alkali resistant lining shall be tested for water tightness and made leak proof before lining work.		
8.01.31	Base slab of large tanks may be cast in number of panels viz. I, II, III etc. Starting with I, the slab panels shall be cast alternately in chess board fashion, with proper construction joints. Adjacent panels shall be cast with sufficient time interval, so that first cast concrete would have undergone most of its shrinking before the second cast concrete is poured against it. The construction joints shall be provided with chemical injection grouting treatment. The construction joints shall have continuity of reinforcement and shall be provided with suitably keys. The size of panels shall be as per IS : 3370 recommendations.		
8.01.32	For construction joint in concrete wall, the maximum height of any lift should not exceed 2 meters. However, the time interval between the successive lifts should be as small possible and the wall should be built to its full height in the least possible time.		
8.01.33	1000mm wide x 100 mm thick plinth protection in PCC (M-15) shall be provided around all buildings, pits / sumps, clarifiers, tanks, etc.		
8.01.34	All masonry walls shall be provided with Damp Proof Course at plinth level.		
8.01.35	Wherever required PVC coated chain - link fencing shall be provided as per specification.		
8.01.36	Expansion joints for all underground structures shall be made water tight by using ribbed PVC water stops with central bulb or of kicker type. The thickness and width of PVC water stops shall be as per the requirement of design. However, the minimum thickness and width shall be 6mm and 225mm respectively. Two - part polysulphide sealant conforming to IS: 12118 shall be used for sealing of joints. Preformed bitumen impregnated fibre board conforming to IS: 1838 shall be used as joint filler.		
8.01.37	All monorail openings in the walls shall be provided with double plate flush steel door shutters with suitable access platform and ladder as required.		
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS
			PAGE 122 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.01.38	a) All drains inside the building shall have minimum 40mm thick grating covers. In areas where heavy equipment loads would be coming, precast RCC covers shall be provided in place of steel grating. b) All drains outside building shall have perforated precast RCC covers of minimum 50mm thickness with provision of openable steel grating cover at about 4.0m interval. In areas where vehicular loads would be coming precast RCC covers of suitable thickness without perforations and designed for the vehicular loading shall be provided.			
8.01.39	Hand rail height , size and material to be adopted shall be as per general architectural specification.			
8.01.40	In all buildings, suitable arrangement for draining out water collected from equipment blowdowns, leakages, floor washings, fire fighting etc. shall be provided for each floor with suitable floor drains.			
8.01.41	All cable & pipe routing in outlying area shall be clubbed and shall run over ground on steel trestles or other supporting structures at a height specified elsewhere in this specification except in some localised area (as approved by Employer) where the same can run in trenches. In case cable route is not envisaged in the area, pipe shall be routed on ground over RCC pedestals at a height of not less than 500 mm. All trenches shall be of RCC with removable RCC covers.			
8.01.42	Water supply line & drainage of pump house shall be connected with the nearest Employer's water supply & drainage line.			
8.01.43	Unless specified all sand filling shall be compacted to minimum 75% of the relative density and backfilled earth shall be compacted to minimum 90% of the Standard proctor density at OMC. However, sub - grade for the roads shall be compacted to minimum 95% of the Standard Proctor density at Optimum moisture content (OMC).			
8.01.44	All liquid retaining structures shall be leak-proof. Water proofing of all liquid retaining structures shall be done by addition of plastciser cum water proofing admixture conforming to IS : 9103, in the concrete at the time of mixing and through external treatment by chemical injection grouting at all construction joints as described in the specification. Addition of admixture should not reduce the strength of the concrete below the specified strength in any case. In addition, limit on permeability as given in IS : 2645 shall also be met with. Further if required, chemical injection grouting treatment shall be applied to make the structure leak proof, if leakage is observed during hydro - test or otherwise, with no cost implication to the Employer.			
8.01.45	Plywood formwork shall be used for all water retaining/ conveying structures (only on the face having contact with water) and for all overground concrete works. It shall also be used for the inner face of sump of pump (i.e. faces of piers back walls, breast walls and baffle walls having contact with water. For all other areas steel/ plywood formwork shall be used.			
8.01.46	All buildings shall be provided with peripheral drains by the side of plinth protection for catering to the rain water from roofs and storm water from adjacent area.			
8.01.47	Under drainage arrangement for under ground structures shall be provided as applicable in line with relevant codal provisions.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 123 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.01.48	2.0m wide walkway with concrete paving shall be provided connecting all buildings and facilities. The top of walkway shall be minimum 200mm above FGL.			
8.01.49	For all buildings, finished floor level (FFL) shall be minimum 500mm above finished ground level (FGL).			
8.01.50	Acid/ Alkali Resistant Lining The acid / alkali resistant lining shall be provided broadly in the areas identified. The Bidder shall give a guarantee for satisfactory functioning of the lining for a period of 36 months from the date of completion of the work or date of handing over the site to the Engineer, whichever is later. The Bidder shall replace / rectify defects is any, observed in the lining to the satisfaction of the Engineer without any extra cost during this period.			
8.01.51	Bituminous Coating Bituminous coating shall be applied on the inside faces of the water retaining structures and also on that portion of water retaining structure which are in contact with ground water. Surface to be treated shall be absolutely dry, clean and dust free. The surface shall be sand papered, before applying the coating. The external surfaces of concrete which are in contact with ground water shall be applied with hot industrial bitumen conforming to IS : 702, of grade 85 / 25. The rate of application shall not be less than 1.70 Kg / sq.m / coat, in three coats and it should be heated to about 120°C before application. Anti stripping compound shall be added wherever necessary. After application of third coat and before it is dried up, sand shall be spread on the surface to cover it completely. Sufficient time shall be allowed after spreading sand, before back filling is done in order to allow the final coat to dry up completely. The internal surfaces of water retaining structure which are in contact with water shall be applied with one coat of suitable primer followed by minimum 3 coats of bitumen paint conforming to IS 9862 to achieve a DFT of 150 micron of bitument coat			
8.01.52	40mm Dia. MS rods as earthing mat, placed at a distance of 1.0M away and at depths between 0.60M and 1.00M shall be supplied and laid all around the periphery of buildings, structures, and out door equipment, as per approved drawings. Riser of 40mm Dia. MS rods and connecting to the above Earthing mat shall also be supplied and laid in position by the Contractor, as per the approved drawings. Raiser shall be laid up to a height of 300 mm above the local Ground level, at each of the columns of the buildings on the outside of the buildings, and minimum 2 (two) numbers of structures and equipment. The contractor also supply and lay necessary number of 3.0 M deep 40 mm Dia. MS rods Earthing electrodes and connecting them to the Earthing mat, as per the approved drawings and supplying and laying of 40 mm Dia. MS rods for connecting the Contractor's earthing mat with the Employer's earthing mat separately of two locations.			
8.02	Concrete General a) Concrete work shall be carried out as per IS:456. Mix design concrete shall be used for all areas other than lean concrete work and plain cement concrete where nominal/volume mix can be permitted. Design mix shall be carried out as per IS:10262. Specific approval of the Engineer shall be obtained regarding degree of quality control to be adopted for design mix.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 124 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS																					
	b) Minimum grade of reinforced cement concrete for all foundations including piling shall be M25 unless noted otherwise. Minimum grade of concrete for other structures/areas (other than machine foundations) shall be M25 for all superstructure and substructure unless noted otherwise elsewhere in this specification. c) The minimum grades of concrete for different machine foundations and some of other important structural members shall be as follows: <table><thead><tr><th>Sl. No.</th><th>Description</th><th>Minimum grade of concrete</th></tr></thead><tbody><tr><td>i)</td><td>TG Top Deck</td><td>M-35</td></tr><tr><td>ii)</td><td>ID, FD and PA fan Deck</td><td>M-30</td></tr><tr><td>iii)</td><td>Coal Mill foundation</td><td>M-30</td></tr><tr><td>iv)</td><td>Sub structure supporting top decks of TG, ID/FD/PA Fans, Mills including raft/ footings</td><td>M-30</td></tr><tr><td>v)</td><td>BFP foundations including deck</td><td>M-30</td></tr></tbody></table> d) Higher grade of concrete than specified above may be used at the discretion of the Bidder. e) Unless otherwise specified, 20mm and down aggregates shall be used for all structural concrete works. f) For thin concrete sections such as roof slab over profiled metal deck sheets, 12mm and down coarse aggregates shall be used for coarse aggregates. g) All underground concrete structures like trenches, substructures of pump houses, all water retaining / carrying structures , etc., shall have super-plasticizer cum water proofing cement additive conforming to IS:9103. In addition, limit on permeability as given in IS:2645 shall also be met with. h) Minimum grade of concrete for Plain Cement Concrete (PCC) has been specified in the preceeding section Special requirements for concreting of major equipment foundations shall be as given below. a) Coarse Aggregates Sound and durable crushed stone aggregates shall be used. All aggregates shall be tested for alkali aggregate reaction. Materials, which contain high percentage of reactive silica, shall not be used. In exceptional cases, high percentage of reactive silica content, aggregate may be allowed where low alkali content cement shall be used. Lime stone aggregate shall not generally be used for foundations which are subjected to high temperature and repeated temperature cycles (like in the case of all machine foundations). However, in case other types of suitable aggregate is not available, the Engineer may allow the use of lime stone aggregate provided the Bidder gets the sample tested from a reputed testing laboratory for satisfactory performance under high temperature and repeated temperature cycle. Unless otherwise specifically approved by the engineer, the tests shall be carried out for a temperature range from 10 °C to 65 °C and for 60 (sixty) temperature cycles.				Sl. No.	Description	Minimum grade of concrete	i)	TG Top Deck	M-35	ii)	ID, FD and PA fan Deck	M-30	iii)	Coal Mill foundation	M-30	iv)	Sub structure supporting top decks of TG, ID/FD/PA Fans, Mills including raft/ footings	M-30	v)	BFP foundations including deck	M-30
Sl. No.	Description	Minimum grade of concrete																				
i)	TG Top Deck	M-35																				
ii)	ID, FD and PA fan Deck	M-30																				
iii)	Coal Mill foundation	M-30																				
iv)	Sub structure supporting top decks of TG, ID/FD/PA Fans, Mills including raft/ footings	M-30																				
v)	BFP foundations including deck	M-30																				
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 125 OF 234																		

CLAUSE NO.	TECHNICAL REQUIREMENTS			एनटीपीसी NTPC
	b)	Temperature Control of Concrete The temperature of fresh concrete shall not exceed 25 deg C when placed. For maintaining the temperature of 25 deg C in the top decks of machine foundations, crushed ice (if required) shall be used in mixing water.		
	c)	Admixture Plasticizer /super plasticizer admixture shall generally be added to the concrete for promoting workability. In addition, plasticizer/super plasticizer-cum-ratarder shall be added to retard the setting time for mass concreting work as required. In case of pumping, suitable pumping additive shall also be added to avoid segregation and increase flowability. The slump shall generally be in the range given below: Top decks of TG, - 150 mm to 200 mm BFP, ID/PA/FD Fans, Mill deck - 100 mm to 150 mm Block foundation - 100 mm to 150 mm Column - 100 mm to 150 mm Piling (bored cast-in-situ) - 150 mm to 180 mm		
	d)	Form work Plywood with film face form work shall be used for the top decks of all machine foundations and also for columns of TG foundation.		
	e)	Placing of Concrete Base Raft and top deck of machine foundations shall be cast in a single pour.		
	f)	Ultrasonic Testing Ultrasonic pulse velocity test shall be carried out for the top decks of all machine foundations and TG substructure to ascertain the homogeneity and integrity of concrete. In addition, additional cubes (at the rate of one cube per 150 cu.m. of concrete subject to a minimum of six cubes) shall be taken to carry out Ultrasonic Pulse velocity (UPV) testing on the cubes, to serve as reference UPV values. Testing shall be done as per IS:13311 (Part-1). In case of any defect, the Bidder shall rectify the defects suitably using cement/epoxy grout, etc.,		
	g)	Scheme for Concreting Weigh Batching Plants, transit mixer, concrete pump shall be mobilised. Arrangements for standby Plant and Equipment shall also be made.		
	h)	Reinforcement Steel Reinforcement Steel shall be of grade Fe500 TMT conforming to IS1786. However minimum elongation shall be 14.5%.		
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 126 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.03.0	Formwork Formwork for building RCC Slabs/ Beams & Columns shall be of 2 different types. Type 1 Formwork: (For RCC slab of Structural Steel Framed Buildings Only) Troughed metal deck sheets shall be used as permanent shuttering. These profiled metal deck sheets shall be fixed to the structural steel secondary beams/ Purlins using Headed shear anchor studs. The metal deck sheet for turbine bay roof shall have permanent colour coating on bottom side of metal deck in addition to metallic coating as specified elsewhere in the specification. The detailed material property requirement of metal deck sheet is specified elsewhere in this specification. The shear anchor studs for fixing metal deck sheet to floor structural beams shall conform to Type-B studs specified in AWS D1.1/D1.1M or equivalent as shear connector of 19mm diameter and 100mm length manufactured from cold drawn round steel bars conforming to the requirement of ASTM A 29, of grade designation 1010 through 1020, of standard quality with either semi-killed or killed, welded by Drawn Arc Stud Welding through metal deck sheet. The shear anchor studs for fixing metal deck sheet to roof structural purlins shall conform to Type-B studs specified in AWS D1.1/D1.1M or equivalent as shear connector of 16mm diameter and 65mm length manufactured from cold drawn round steel bars conforming to the requirement of ASTM A 29, of grade designation 1010 through 1020, of standard quality with either semi-killed or killed, welded by Drawn Arc Stud Welding through metal deck sheet. Type 2 Formwork: (For RCC Buildings) Plywood with film face formwork shall be used for floor & roof slabs, Columns & Beams of all RCC buildings			
8.04.0	Fencing and Gate Fencing Fencing with gate shall be provided around transformer yard, switchyard area, fuel oil area and other areas wherever necessary due to security, safety, and statutory requirements as per following specifications. The fencing, with gate (unless specified otherwise) shall comprise of PVC coated G.I. welded wire mesh fencing of minimum 4 mm diameter (including PVC coating) of mesh size 75mmX75mm of height 2.4m above the toe wall with a 600mm high galvanised concertina at the top, such that total fence height of 3.0m above the toe wall is achieved. The diameter of the steel wire for chain link fence (excluding PVC coating) shall not be less than 2.5 mm. The PVC coated chain link will be stretched by the clips at 0.5m intervals to three strands of galvanised high tensile spring steel wire (HTSSW) of 2.5 mm diameter interwoven with chain link wire mesh and kept under tension which in turn are attached to the fence post with security nuts and bolts. On every fourth post a clamping strip will be threaded through the links of chain link and bolted to the fence post with the help of security nuts and bolts. Above the chain link a 600mm high tensile serrated galvanised wire (HTSW) concertina made with wire diameter of 2.5mm will be stretched to 6m and attached to two strands of galvanised HTSSW of 2.5 mm diameter by means of clips at 1m intervals. These two HTSSW strands will be attached to the fence posts with 12 mm security fasteners.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 127 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS				
8.05.0	All nuts, bolts, fasteners, clamping strips, clamps, clips, etc., shall be galvanised. All fence posts shall be of 75 x 75 x 6 MS angles spaced at 2.5m c/c distance. All corner posts will have two stay posts and every tenth post will have transverse stay post. Suitable R.C.C. foundations for the post and stays shall be provided based on the prevailing soil conditions. All posts of fencing shall be painted with chlorinated rubber paint over a suitable primer. Toe walls either of brick masonry with bricks of minimum 50 kg./sq.cm. crushing strength or of hollow concrete block masonry shall be provided between the fence posts all along the run of the fence with suitable foundation. Toe wall shall be minimum 200mm above the formation level with 50mm thick P.C.C. coping (1:2:4) and shall extend minimum 300mm below the formation level. Toe wall shall be plastered with cement sand mortar (1:6) on both sides and shall be painted with two coats of textured cement point (Sandtax Matt or equivalent) of approved colour and shade. Toe wall shall be provided with weep holes at appropriate spacings. Gate along fencing All gates shall be of structural steel of minimum 3.75 metres width for single lane access road and 8.00 m width for double lane access roads. The height of gate shall be same as that of the fence unless noted otherwise. Each gate shall have provision for wicket gate of size 1.0 m x 2.1 m. The gate frame and post shall be fabricated from medium class MS pipe of nominal diameter not less than 75 mm. The panel plate shall be of minimum thickness 2.5 mm conforming to IS:513. The gate shall be complete with fabricated hinges, MS aldrops with locking arrangement, tempered steel pivot, guide track of MS tee, bronze aluminum ball bearing arrangement, castor wheel, etc.				
	Grating All gratings shall be electroformed types. Minimum thickness of the grating shall be 40 mm. The opening size shall not be more than 30mmx100mm. The minimum thickness of the main bearing bar shall be 5 mm or as per design requirement whichever is higher. All gratings shall be hot dip galvanised at the rate of 610 g. per sq.m. after surface preparation by means of shot blasting / chemical cleaning.				
8.06.0	Fabrication The fabrication shall be done as per fabrication drawing which would clearly indicate various details of joints to be welded, type of weld, length and size of weld. Welding a) Welding of Structural steel shall be done by an electric arc process and shall conform generally to relevant acceptable standards viz. IS:816, IS:9595, IS:814, IS:2014, IS:4354 and Indian Standard Hand Book for metal arc welding, and other standards, codes of practice internationally accepted. For welding of any particular type of joint, Bidder shall give appropriate tests as described in any of the Indian Standards - IS: 817, IS: 7307 and international standards as relevant. b) Submerged arc-welding shall be used for welding longitudinal fillet welds (connecting flange with web) and longitudinal / transverse butt joints for fabrication of columns,				
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS	PAGE 128 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	framing beams and crane girders and all other built-up members, unless manual arc welding is specifically approved by the Engineer. Necessary jigs and fixtures and rotation of structures shall be so arranged that vertically down-hand position of welding becomes possible. 'Open-Arc-Welding' process employing coated electrodes shall be employed for fabrication of other welded connections and field welding. c) Wherever welding is done for assembling the components of structures, the job shall so positioned that down hand welding is possible. d) Any structural joint shall be welded only by those welders who are qualified for all welding procedures and positions in such type of joint that is welded. e) All records for entire welding operations such as welders identification marks, the joints welded by the each welder, the welding procedures adopted, welding machine employed, pre and post heating done and any non destructive test done and stress relieving /heat treatment performed on such joints shall be accessible to the Engineer for scrutiny. f) In a fabrication of plated columns/beams and built up members all shop splices in each component part shall be done before such component part is welded to other parts of the member. Wherever weld reinforcement interferes with proper fitting between components to be assembled by welding, these welds shall be ground flush prior to assembly. g) The members to be jointed by fillet welding shall be brought and held as close together as possible and in no event shall be separated locally by more than 3mm. If the local separation is 1.5mm or greater, the fillet weld size shall be increased by the amount of separation. Edge preparation for welding as per weld joint detail shall be prepared either by machines or by automatic gas cutting. All edges cut by flame shall be ground before they are welded. Electrodes a) The electrodes used for welding shall be of suitable type and size depending upon specification of the parent materials, the method of welding, the position of welding and quality of welds desired e.g. normal penetration welds or deep penetration welds. However, only low Hydrogen electrodes shall be used for plate thickness above 20 mm. b) All low hydrogen electrodes shall be baked and stored before use as per manufacturer recommendation. The electrodes shall be rebaked at 250⁰C - 300⁰ C for one hour and later on cooled in the same oven to 100⁰C. It shall be transferred to an holding oven maintained at 60⁰C - 70⁰C. The electrodes shall be drawn from this oven for use. c) Where coated electrodes are used they shall meet the requirements of IS:814 and relevant ASME-Sec. Covering shall be heavy to withstand normal conditions of handling and storage. d) Only those electrodes which give radiographic quality welds shall be used for welds which are subjected to radiographic testing e) Where bare electrodes are used, these shall correspond to specification of the parent material. The type of flux-wire combination for submerged arc welding shall			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 129 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			एनटीपीसी NTPC										
	conform to the requirements of F-60 Class of AWSA-5-17-69 and IS:3613. The electrodes shall be stored properly and the flux shall be baked before use in an oven in accordance with the manufacturer's requirements as stipulated. f) 308L and 309L electrodes / fillers shall be used for welding of stainless steel to stainless steel and stainless steel to mild steel respectively. g) Specific approval of the Engineer shall be taken by Bidder for the various electrodes proposed to be used on the work before any welding is started. Preheating inter-pass temperature and post weld heat treatment. a) Mild steel plates conforming to IS:2062 and thicker than 20mm, may require preheating of the parent plate prior to welding as mentioned in Table-I. However, higher preheat and interpass temperatures required due to joint restraint etc. and will be followed as per approved welding procedure. In welding materials of unequal thickness, the thicker part shall be taken for this purpose. c) Base metal shall be preheated, notwithstanding provisions of IS:9595, to the temperature given in Table-1 prior to welding or tack welding. Preheating shall bring the surface of the base metal to the specified preheat temperature and this temperature shall be maintained as minimum temperature while welding is in progress. TABLE – 1 MINIMUM PREHEAT and INTER PASS TEMPERATURE FOR WELDING <table><tr><th>Thickness of thicker part at point of Welding</th><th>Welding using Low hydrogen electrodes or Submerged arc welding</th></tr><tr><td>Upto and including 20mm</td><td>None</td></tr><tr><td>Over 20mm and upto and including 40m</td><td>20 °C</td></tr><tr><td>Over 40mm and upto and including 63mm</td><td>66 °C</td></tr><tr><td>Over 63mm</td><td>110 °C</td></tr></table> c) Preheating may be applied by external flame which is non-carbonising like LPG, by electric resistance or electric induction process such that uniform heating of the surface extending upto a distance of four times the thickness of the plate on either side of the welding joint is obtained. d) Thermo-chalk, thermo-couple or other approved methods, shall be used for measuring the plate temperature. e) All butt welds with plates thicker than 50mm and all site butts weld of main framing beam shall require post weld heat treatment as per procedure given in AWS D-1.1. Post heating shall be done upto 600 deg.C and rate of application shall be 200 deg.C per hour. The post heat temperature shall be maintained for 60 minutes per 2.5cm. thickness. For maintaining slow and uniform cooling, asbestos pads shall be used for covering the heated areas.				Thickness of thicker part at point of Welding	Welding using Low hydrogen electrodes or Submerged arc welding	Upto and including 20mm	None	Over 20mm and upto and including 40m	20 °C	Over 40mm and upto and including 63mm	66 °C	Over 63mm	110 °C
Thickness of thicker part at point of Welding	Welding using Low hydrogen electrodes or Submerged arc welding													
Upto and including 20mm	None													
Over 20mm and upto and including 40m	20 °C													
Over 40mm and upto and including 63mm	66 °C													
Over 63mm	110 °C													
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 130 OF 234										

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	Sequence of Welding			
	a) The sequence of welding shall be carefully chosen to ensure that the components assembled by welding are free from distortion and large residual stresses are not developed. The distortion should be effectively controlled either by a counter effect or by a counter distortion. The direction of welding should be away from the point of restraint and towards the point of maximum freedom. b) Each case shall be carefully studied before finally following a particular sequence of welding. c) Butt weld in flange plates and/or web plates shall be completed before the flanges and webs are welded together. d) The beam and column stiffeners shall preferably be welded to the webs before the web and flanges are assembled unless the web and flanges to the beam or column are assembled by automatic welding process. e) All welds shall be finished full and made with correct number of runs, the weld being kept free from slag and other inclusions, all adhering slag being removed. f) Current shall be appropriate for the type of electrode used. To ensure complete fusion, the weaving procedure should go proper and rate of arc advancement should not be so rapid as to leave the edges unmelted. g) Pudding shall be sufficient to enable the gases to escape from the molten metal before it solidifies. h) Non-uniform heating and cooling should be avoided to ensure that excessive stresses are not locked up resulting ultimately in cracks. i) The ends of butt welds shall have full throat thickness. This shall be obtained on all main butt welds by the use of run off and run on pieces adequately secured on either side of main plates. The width of these pieces shall not be less than the thickness of the thicker part joined. Additional metal remaining after the removal of extension pieces shall be removed by grinding or by other approval means and the ends and surface of the welds shall be smoothly finished. Where the abutting parts are thinner than 20mm the extension pieces may be omitted but the end be welded to provide the ends with the required reinforcement. j) The fusion faces shall be carefully aligned. Angle shrinkage shall be controlled by presetting. Correct gap and alignment shall be maintained during the welding operation. k) All main butt welds shall have complete penetration and back surface of the weld being gouged out clean before first run of the weld is given from the back. However, partial penetration butt weld shall be permitted, when specifically shown in the design drawings. l) Intermittent welds shall be permitted only when shown in the design drawings. m) The welding shrinkage shall be minimised by adopting the correct welding procedure and method. In long and slender member extra length should be provided at the time of fabrication for shrinkage.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 131 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	Testing of Welders			
	All the welders to be employed for the job shall have to qualify the appropriate tests laid down in IS: 817 and IS: 1181 and ASME IX/AWS D1.1. All the necessary arrangements required for the testing of welders are to be provided by the Bidder.			
	Inspection of Welds			
	a)	Visual Inspection		
	100 percent of the welds shall be inspected visually for external defects. Dimensions of welds shall be checked. The lengths and size of weld shall be as per fabrication drawings. It may be slightly oversized but should not be undersized. The profile of weld is affected by the position of the joint but it should be uniform. The welds should have regular height and width of beads. The height and spacing of ripples shall be uniform. The joints in the welds run shall as far as possible be smooth and should not show any humps or craters in the weld surface. Welds shall be free from unfilled craters on the surface, under-cuts, stages on the surface and visible cracks. Such inspection shall be done after cleaning the weld surface with steel wire brushes and chisel to remove the spatter metal, scales, slag, etc., If external defects mentioned above are noticed, there is every possibility of internal defects and further radiographic/ultrasonic examination shall be undertaken.			
b)	Production Test Plate			
Test plates shall be incorporated on either side of at least one main butt welds of each flange plate and web plate of every main frame columns and crane girder. The weld shall be continuous over the test plate. The test plate extensions of the main plates and shall be fixed so that metal lies in the same direction as that of the main plate. Test plates shall be prepared and tested in accordance with the accepted Standards, in the presence of the Engineer or his authorised representative. Should any of these tests fail, further radiographic examination of the welds shall be done. These tests for test plates and radiographic examination are additional to those contemplated under inspection and testing.				
c)	Non-destructive and special testing			
Radiographic / ultrasonic or other non-destructive examination shall be carried out. All tests of welds shall be carried out by the Bidder at his own cost. The cordoning of radiation zone, while Radiography testing is going on, shall be done. In case of failure of any of the tests, re-testing of the joints shall also be carried out after rectification is done.				
d)	Rectification of defective welding work			
Wherever defects like improper penetration, extensive presence of blow holes, undercuts, cracking, slag inclusion, etc., are noticed by visual inspection/other tests, the welds, in such location shall be removed by gouging process. The joints shall be prepared again by cleaning the burrs and residual matters with wire brushes and grinding, if necessary, and rewelded. The gouging shall as far as possible be done using gouging electrodes.				
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 132 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			एनडीपीसी NTPC
	Inspection and Testing a) Fillet Welds i) All fillet welds shall be checked for size and visual defects. ii) Macroetch examination on production test coupons for main fillet weld with minimum one joint per built up beam, column and crane girder, etc. iii) 25% weld length of tension members of crane girder shall be subjected to dye-penetration test. iv) On all other welds, dye-penetration test on 5% of weld length with minimum 300mm at each location shall be carried out. b) Butt Welds i) 100% visual examination. ii) Dye penetration test on all butt welds after back gouging shall be carried out. iii) Mechanical testing of production test coupons - minimum one joint/built up beam, column and crane girder. The engineer may reduce the frequency of the test, after getting consistently satisfactory results of initial 10 tests. iv) 100% radiography test on butt welds of tension flange (bottom flange) of crane girder and bunker supporting girders. All other butt welds shall be subjected to radiography test on 10% of weld length of each welder. c) Dimensional Tolerance and Acceptance Criteria of Welds i) Every first and further every 10th set of identical structure shall be checked for control assembly at shop before erection. ii) All structures, components/members shall be checked for dimensional tolerance during fabrication and erection as per IS:7215 and IS:12843 respectively. iii) Dry film thickness after painting shall be checked by using elchometer. iv) Acceptance criteria of NDTs on welds shall be as per AWS D-1.1 (Dynamically loaded structures - Tension welds). Correction of Defective Welds Correction of defective welds shall be carried out without damaging the parent metal. When a crack in the weld is removed magnetic particles inspection or any other equally positive means shall be used to ensure that the whole of the crack and material up to 25mm beyond each end of the crack has been removed. Erection of Structures All erection work shall be done with the help of cranes, use of derrick is not envisaged.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 133 OF 234	

CLAUSE NO.	TECHNICAL REQUIREMENTS				
	Erection Marks				
	a) Erection marks in accordance with fabrication drawing shall be clearly painted on the fabricated steelwork. Each piece shall be marked in at least on two places. Each piece shall also have its weight marked thereon.				
	d) The centre lines of all columns, elevations and girder bearings shall be marked on the sections to ensure proper alignment and assembly of the pieces at site.				
	Erection Scheme				
	a) The Erection Scheme for the erection of all major structures shall be furnished. The erectability of the structure shall be checked by the Bidder before commencement of fabrication work to avoid future modification. The erection scheme shall indicate the approximate weight of the structural members, position of lifting hook, crane boom length, crane capacity at different boom length and at different boom inclination, etc., Bidder shall take up the erection work only after he has obtained the approval of the erection scheme from the Engineer.				
	b) The erection scheme shall also give details of the method of handling, transport, hoisting, including false work/staging, temporary, bracing, guying, temporary strengthening, etc., It will also give the complete details of the number and capacity of the various erection equipment that will be used such as cranes, winches, etc., along with disposition at the time of erection of columns, trusses, etc.				
	c) The erection of columns, trusses, trestles, portals, etc., shall be carried out in one single piece as far as practicable. No column shall be fabricated and erected in more than 3 pieces. Galleries shall generally be erected as box i.e. the bottom chord and bracings, top chord and bracings, side vertical posts and bracings, end portals and roof-trusses shall be completely welded prior to erection and if required temporary strengthening during erection shall be made. The inside sheeting runners and roof sheeting purlins may be erected individually. When erection joints are provided in columns, their location shall generally be just above a floor level.				
	8.07.0	Steel Helical Springs And Viscous Dampers			
	8.07.01	General Requirement			
	This part of the specification covers the requirement for the manufacturing, testing, supply, transport to site, pre-stressing erection, supervision of erection by the vendor, release of pre-stress, alignment, commissioning, etc. of Steel helical springs and viscous dampers.				
The Steel helical springs and viscous dampers supplied should be of proven make.					
8.07.02	Codes and Standards				
Some of the relevant applicable Indian standards and codes, etc, applicable to this section of the specification are listed below:					
DIN : 4024 Machine foundations; Flexible supporting structures for machine with rotating masses.					
DIN : 2089 Helical compression springs out of round wire and rod : calculation & design.					
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS	
				PAGE 134 OF 234	

CLAUSE NO.	TECHNICAL REQUIREMENTS				
8.07.03	DIN : 2096 Helical compression springs out of round wire and rod; quality requirements for hot formed compression springs.				
	VDI : 2056 Criteria for assessing mechanical vibrations of machine.				
8.07.04	VDI : 2060 Criteria for assessing the state of balance of rotating rigid bodies.				
	Design & Supply of Material				
8.07.04	i) Supply				
	Steel helical springs and viscous dampers and associated auxiliaries shall consist of:				
8.07.04	(a) Steel helical spring units and viscous dampers along with viscous liquid including associated auxiliaries for installation of the spring units and dampers like steel shims, adhesive pads, etc.				
	(b) Frames for pre-stressing of spring elements.				
8.07.04	(c) Suitable hydraulic jack system including electric pumps, high pressure tubes etc. required for the erection, alignment etc., of the spring units. One set of extra hydraulic jacks, and hand operated pumps shall also be provided.				
	(d) Any other items which may be required for the pre-stressing, erection, release of pre-stress, alignment, and commissioning of the Steel helical springs and viscous dampers.				
8.07.04	ii) Design				
	The spring units should have stiffness in both vertical and horizontal directions with the horizontal stiffness not less than 50% of vertical stiffness. The stiffness should be such that the vertical natural frequency of any spring unit at its rated load carrying capacity is not more than 3 Hz. The damper units or spring-cum-damper units should be of viscous type offering velocity proportional damping. The damper units should be suitable for temperatures ranging from 0 to 50°C. The damping resistance of individual damper units should be such that the designed damping can be provided using reasonable number of Units.				
8.07.04	The Steel helical springs and viscous dampers shall be designed for a minimum operating life of 30 years.				
	Manufacturing & Testing				
8.07.04	Complete manufacturing and testing of the Steel helical springs and viscous dampers shall be done at the manufacturing shop of the approved sub vendor / supplier. For this purpose the contractor / sub vendor shall submit the detailed quality plan for approval of engineer and take up the manufacturing / testing after approval of such quality plan. The quality plan shall include				
	(a) Manufacturing schedule and quality check exercised during manufacturing.				
8.07.04	(b) Detail of test to be carried out at the manufacturing shop with their schedule.				
	(c) Special requirements, if any, regarding concreting of top deck.				
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS	PAGE 135 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	(d)	Complete step-by-step procedure covering the installation and commissioning of the spring system.		
	(e)	Manuals for erection, commissioning, testing and maintenance of the Steel helical springs and viscous dampers.		
	(f)	A checklist for confirming the readiness of the civil fronts for erection of Steel helical springs and viscous dampers.		
	(g)	Checklist for equipment required at each stage of erection.		
	(h)	Bill of materials and data sheet of various elements such as spring units, viscous dampers, with their rating, stiffness etc. included in the supply.		
	(i)	Bill of material and data sheet for frames for pre stressing, hydraulic jack including electric pump, high pressure tubes, hand operated pump etc., with their rating and umbers.		
	(j)	Any other details which may be necessary to facilitate design and construction of the foundations / structures.		
8.07.05	The Springs shall conform to codes DIN 2089 and DIN 2096. The quality assurance and inspection procedure shall be finalised on the basis of the above codes and the quality plans be drawn accordingly.			
8.07.06	Transportation			
	Steel helical springs and viscous dampers shall be suitably protected, coated, covered, boxed and crated to prevent damage or deterioration during transit, handling and storage at site till the time of erection.			
8.07.07	Erection and Commissioning			
	Complete erection and commissioning of the Steel helical springs and viscous dampers including pre-stressing of elements, placing of elements in position, checking clearances on the shuttering of the RCC top deck, releasing of pre-stress in spring elements, making final adjustments and alignments etc. shall be carried out by a specialist supervisor of vendor.			
	The contractor shall guarantee the performance of the Steel helical springs and viscous dampers for 24 months from the date of commissioning of each machine which shall be termed as Guarantee Period”.			
8.07.07	Supervision			
	The supervision of installation of Steel helical springs and viscous dampers including pre-stressing, placing, releasing and alignment of spring units shall be done by a specialist supervisor of sub vendor / supplier, trained for this purpose.			
8.07.08	Realignment of Spring System			
	If any realignment of the Steel helical springs and viscous dampers is required to be done for aligning the shaft or for any other reasons during the first one year of operation from the date of commissioning of the machine, the same shall be done by the contractor.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS
				PAGE 136 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.07.10	Acceptance Criteria Stiffness values shall be checked. The permissible deviations shall be as per DIN 2096. Following acceptance criteria shall be followed: General workmanship is being good as recommended by the manufacturer and approved by the Engineer. Tolerances are within the specified limit. Material test certificate (MTC) is in compliance with the applicable codes / standards. Bought out material is from the approved manufacturer / vendor. Bought out material is matching with the approved sample.			
8.08.0	SHEETING WORKS			
8.08.01	General Requirement			
	This part of the specification covers the technical requirements of colour-coated sheet and allied works for roofing, decking and cladding, with or without thermal insulation. Supply and installation of the profiled sheeting shall be done by same agency. During handling / stacking, if any damage is done to sheets like distortion of edges, formation of dents, scratches on sheet etc., then such damaged sheet shall stand rejected and shall be immediately replaced by the contractor.			
8.08.02	Material			
8.08.03	Metal Decking			
	(a) Troughed permanently colour coated metal decking sheet of steel for floor/roof decking shall conform to the requirements of Table-1. (b) Alternatively aluminium feed material of minimum 0.9 mm (bare metal thickness) thick colour coated aluminium alloy of series 31,000 and above as per IS 737 and IS 1254 can also be used for metal decking. (c) Steel/ aluminium alloy shall be colour coated with total coating thickness of 35 microns (nominal) dry film thickness (DFT) comprising of silicon modified polyester (SMP with silicon content 30% to 50%) paint or polyester paint, of 20 microns (nominal) SMP or polyester paint on one side (exposed side) on 5 micron (nominal) primer coat and 5 microns (nominal) SMP or polyester paint over 5 micron (nominal) primer coat on the other side. SMP and polyester paint systems shall conform to Product type 4 as per AS/ANZ 2728. (d) Sheet shall be of approved profile, sectional properties, colour and shade. (e) Chemical composition of troughed permanently colour coated metal decking sheets shall conform to the provisions of the same reference code to which the mechanical properties conform to. (f) Mechanical properties shall be confirmed by relevant tests			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 137 OF 234



CLAUSE NO.

TECHNICAL REQUIREMENTS

8.08.04

Metal Cladding

- (a) Troughed permanently colour coated metal sheets of steel for roofing and side cladding (internal and external) shall conform to the requirements of Table-2:
- (b) Alternatively aluminium feed material of minimum 0.7 mm (bare metal thickness) thick colour coated aluminium alloy of series 31,000 and above as per IS 737 and IS 1254 can also be used.
- (c) Steel/ aluminium alloy shall be colour coated with total coating thickness of 35 microns (nominal) dry film thickness (DFT) comprising of silicon modified polyester (SMP with silicon content of 30 % to 50%) paint or Polyester paint, of 20 microns (nominal) SMP or polyester paint on one side (exposed face) on 5 micron (nominal) primer coat and 5 microns (nominal) SMP or polyester paint over 5 micron (nominal) primer coat on other side. SMP and polyester paint systems shall conform to Product type 4 as per AS/ANZ 2728.
- (d) Sheet shall be of approved profile, sectional properties, colour and shade.
- (e) Chemical composition of Troughed permanently colour coated metal sheet for roofing and side cladding shall conform to the provisions of same reference code to which the mechanical properties conform to.
- (f) Mechanical properties shall be confirmed by relevant tests.

TABLE - 1

Group	Grade /Reference Code	Yield strength (minimum) MPa	Tensile strength (minimum) MPa	Elongation% (minimum) L0=50mm	Coating Class Designation L0=80mm	BMT mm	(+ve Tolerance mm	Upper limit of BMT mm	(-ve Tolerance mm	Lower Limit of BMT mm
I	G250/ AS 1397	250	320	25	22		.04		-0.04	
	SS255/ASTM A653M	255	360	18	Z275	0.8		0.84		0.76
	S250GD / EN 10326	250	330	19						
II	G350 / AS1397	350	420	15	14					
	SS340 Class 4 / ASTM A653M	340	410	12	Z275	0.60		0.64		0.56
	S350GD / EN 10326	350	420	16						
III	G550 /AS1397	550	2	2	Z275	0.6		0.64		0.56
	SS550 / class1									
	ASTM A653M	550	570	---						
	S550GD / EN 10326	550	560	--						



CLAUSE NO.

TECHNICAL REQUIREMENTS

Table - 2

Group	Grade /Reference Code	Yield strength (minimum) MPa	Tensile strength (minimum) MPa	Elongation% (minimum) L0=50mm	Coating Class Designation L0=80mm	BMT mm	(+)ve Tolerance mm	Upper limit of BMT mm	(-)ve Tolerance mm	Lower Limit of BMT mm
I	G250/AS1397	250	320	25	22		0.04		-0.04	
	SS255/ASTM A653M	255	360	18	Z275	0.6		0.64		0.56
	S250GD / EN 10326	250	330	19						
II	G350/AS 1397	350	420	15	14					
	SS340 Class 4/ ASTM A653M	340	410	12				0.54		0.46
	S350GD /EN 10326	350	420	16						
	G550/AS 1397	550	550	2	2					
III	SS340 Class 4/ ASTM A653M	550	570	--	Z150	0.4		0.44		0.36
	S350GD /EN 10326	550	560	--						

8.08.05

Plain permanently colour coated steel metal sheet for ridge and hips, flashings, trimmings, closure for vertical and horizontal joints, capping etc shall conform to the same requirements as those of troughed permanently colour coated metal sheet for roofing and side cladding.

8.08.06

- For metal decking the sectional modulus and moment of inertia of troughed profile per meter width shall be so as to limit the deflection of sheets to span/250 over a span of 1.7 m under total super imposed loading (DL +LL) of 450 kg per Sq.M. for two span condition. The sectional modulus and moment of inertia of troughed profile shall be computed as per the provisions of IS: 801 for satisfying the deflection and strength requirements. All structural calculations for checking the adequacy of the profiled sheet for strength & deflection criteria is to be done taking into consideration the maximum permissible negative tolerance over the specified BMT i.e. the lower limit of BMT is to be considered as per last column in Table -1.
- For metal roofing and side cladding, the sectional modulus and moment of inertia of troughed profile per metre width shall be such that the deflection of sheets is limited to span/250 over a span of 1.5 m under design wind pressure of 160 kg/sq.m. for two span condition. The sectional modulus and moment of inertia of troughed profile shall be computed as per the provisions of IS:801 for satisfying the deflection and strength requirements. No increase in allowable stress is permissible under wind load condition. All necessary structural calculations for checking the adequacy of the profiled sheet for strength & deflection criteria is to be done taking into consideration the maximum permissible negative tolerance over the BMT i.e. the lower limit of BMT is to be considered as per last column in Table - 2.
- In case, during the inspection, if it is observed that the BMT of sheet / coil is having (-)ve tolerance beyond 0.04mm i.e. if minimum BMT of sheet is found to be less than the "Lower Limit of BMT" as specified in last column of Table 1 or Table 2 as applicable, it will be rejected.

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.08.07	The maximum spacing of the fasteners shall be 390 mm c/c along the length of purlins / runners. However exact spacing shall be as per the design done by the bidder for the fasteners considering the wind load, self load and other associated loads. Minimum diameter of the fastener shall be 5.5 mm and at least 3 nos. of fasteners shall be used per sheet. Sealant used for cladding shall be butyl based, two parts poly sulphide or equivalent approved, non-staining material and be flexible enough not to interface with fit of the sheets. Filler blocks as a trough filler shall be used to seal cavities formed between the profiled sheet and the support or flashing. The filler blocks shall be manufactured from black synthetic rubber or any other material approved by the Engineer. For insulation of cladding and other areas, mineral wool conforming to IS: 8183 shall be used. The density shall be 32 or 48 kg. /Cu.M. for glass or rock wool respectively. The nominal thickness of insulation shall be 50mm. Special coated fasteners shall be used conforming to class 3 as per AS3566 and shall be tested to 1000 hours salt spray test. Data Sheet for Metal Decking and Metal Cladding shall be submitted as per the formats given in the Annexure-1 & 2.			
8.08.08	Installation and Fixing			
8.08.08.1	Metal Decking			
	a) The sheeting shall be fixed as per the working drawings. Sheets shall be supplied in required sizes (based on purlin spacing) according to the cutting schedule. Generally cutting of sheets to length shall not be permitted at site. Specific approval under exceptional circumstances shall be obtained before cutting of any sheet at site. Power tools shall be used for cutting. Cutting and trimming of small openings which were not finalised at the time of working drawings can be allowed at site. Wherever possible, site cut edges shall be concealed at laps or with flashings. Suitable steel members for stiffening shall be provided at the cut edges. No gas cutting shall be done on the sheet. If any sheet is found with gas cut mark, same shall stand rejected and shall be immediately replaced. b) Distorted, blemished or water stained sheets shall not be used. c) Before installing decking sheet, it shall be ensured that the purlins are in true planes, correctly placed and securely fixed. d) Side and end laps of the sheets shall be made weather proof by securing them with the fasteners not less than 4.0mm diameter with 2.0 mm thick neoprene washer. Maximum spacing of the fasteners should not exceed 500 mm. e) Precautions shall be taken during the erection of the sheets to ensure that partially erected decking sheets are protected during inclement weather and damage at all times. f) Side and end of decking sheet shall be located and positioned in such a manner as to provide the maximum weather protection taking into account the direction of the prevailing wind. g) Length of the sheet shall be such as to cover minimum 3 span purlin spacings.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 140 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.08.08.2	h)	The roof decking sheets shall be fixed to the purlins with the help of self drilling and tapping type fasteners and neoprene washers		
	i)	Sheets shall be laid over the supporting purlins with a minimum bearing of 50 mm and end projection of 75 mm at lap joints.		
	j)	End and side laps between the sheets shall be sufficiently large to ensure the weather tightness. In no case, the end laps shall be less than 150 mm and side laps less than one trough length with proper weather tight arrangement.		
	Roofing and cladding			
	a)	The sheeting shall be fixed as per the working drawings. Sheets shall be supplied in required sizes (based on purlin spacing) according to the cutting schedule. Generally cutting of sheets shall not be permitted at site. Specific approval under exceptional circumstances shall be obtained before cutting of any sheet at site. Power tools shall be used for cutting. Cutting and trimming of small openings which were not finalised at the time of working drawings can be allowed at site. Wherever possible, site cut edges shall be concealed at laps or with flashing. Suitable steel members for stiffening shall be provided at the cut edges. No gas cutting shall be done on the sheet. If any sheet is found with gas cut mark, same shall stand rejected and shall be immediately replaced.		
	b)	Distorted, blemished or water stained sheets shall not be used.		
	c)	Before installing roofing/cladding, it shall be ensured that the supporting structure i.e. purlins/runners are in true planes, correctly placed and securely fixed.		
	d)	Side and end laps of the sheets shall be made weather proof by securing them with the fasteners not less than 4.0mm diameter with 2.0 mm thick neoprene washer and cap of matching colour. Maximum spacing of the fasteners should not to exceed 500 mm.		
	e)	Precautions shall be taken during the erection of roofing/ cladding to ensure that partially erected roofing/cladding and insulation (pending placing of external cladding sheet) are protected during inclement weather to prevent the ingress of water and damage at all times.		
	f)	During erection of roofing/cladding, ladders shall not be leaned on any cladding without precautions being taken against damage.		
	g)	The fasteners shall be installed by means of power tools and provided with neoprene seal.		
	h)	Length of the sheet shall be such as to cover minimum 3 span purlin spacings.		
	i)	Expansion joints shall be provided to take care of movements due to temperature variations.		
j)	The sheets shall be laid on the steel purlins/runner or scantlings to a true plane with the lines of profiles truly parallel to or normal to other sides of the area to be covered, unless otherwise required as in special shape.			
k)	Cladding erection for each elevation shall commence at the bottom and proceed towards the top, in order to ensure tight fitting laps.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 141 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.08.09	l)	The sheets shall be laid with a minimum overlap of 15 cm at the ends and side laps shall be of one trough length subject to a minimum of 50 mm, having a proper water tight arrangement. The minimum lap of sheets with ridges, hips and valleys shall be 15 cm measured at right angles to the line of the ridge, hip and valley respectively.		
	m)	In case of insulated sheeting works, the insulation shall be provided.		
	n)	In case double skin cladding, inner sheet and outer sheet can be directly fixed to the opposite faces of the sheeting runner totally concealing the supporting steel structure.		
	o)	Crimping and curving wherever specified shall be provided over the profile sheet.		
	Flashing, trimming etc.			
	Flashings, cappings, trimming, closure for vertical/horizontal joints, ridge and hips etc. shall be provided with a minimum lap of 15 cm. The lapping of sheets shall provide the dust free, airtight enclosure. If required this may be achieved by using 2-parts polysulphide sealing compound or butyl tape.			
	Aprons, closures, flashings and other similar fittings shall be formed at works before delivery to site. Site forming or dressing of these items will be approved only in special locations.			
	The black synthetic rubber external trough fillers are to be secured by the mechanical fixings to the flashings or parapet capping.			
8.09.0	Pre-Fabricated Insulated Metal Sandwich Panel For Roofing			
8.09.01	Pre-Fabricated insulated metal sandwich panel for roofing shall consist of Troughed Permanently Coloured coated sheets of approved profile at top & bottom having minimum yield strength of 340 Mpa and 0.5 mm thickness (bare metal thickness i.e. metal thickness excluding thickness of coating & painting) and coated with Zinc Aluminium alloy (Zincalume) at the rate of 150gm per sq.m. conforming to AS: 1397/ class 4, ASTM A653M/ EN 10326. The outer exposed face of the sheets shall be permanently colour coated with total coating thickness of 25 micron (nominal) dry film thickness (DFT) comprising Silicon Modified Paint (SMP with silicon content of 30% to 50% paint) or super polyester paint of 20 micron (nominal) over 5 micron (nominal) primer coat, and the inner face of the sheets shall be colour coated with total coating thickness of 10 micron (nominal) dry film thickness (DFT) comprising of SMP, with silicon content of 30% to 50% or super polyester paint of 5 microns (nominal) over 5 mm micron (nominal) primer coat (SMP & super polyester paint shall confirm to product type 4 of AS/NZS2728).			
8.09.02	The insulation between the metal sheets shall be minimum 50mm thick Mineral Wool conforming to IS: 8183, of minimum density 32 kg / cu.m for glass wool or 48 kg / cu.m for rock wool.			
8.09.03	Sheets shall be of approved profile, sectional properties (suitable for specified loading / deflection and purlins / runners spacing), color & shade and the item shall include all labour , materials , equipments, handling, transportation, special coated self drill fasteners for sheet fixing, special coated Z spacers for insulation fixing & clip fixing, and special coated clips for clip lock system (special coating conforming to corrosion resistant class 3 of AS 3566 and tested for 1000 hour salt spray test).			
8.09.04	Roofing sheet panel shall be laid to specified slope.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 142 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.10.0	HEADED SHEAR STUDS			
8.10.01	General This part of specification covers the technical requirement of Headed shear studs. The studs shall be welded to steel beams either directly or through metal deck sheet whichever is applicable. In case metal deck sheet is used as permanent shuttering, it shall not be considered as structural element for slab design.			
8.10.02	Material (a) Studs shall be manufactured from cold drawn round bars conforming to the requirement of ASTM A 29 of grade designation 1010 through 1020 or equivalent, inclusive either semi-killed or killed (aluminium or silicon deoxidation). (b) Mechanical properties and other requirements of studs shall conform to requirement of Type-B studs specified in AWS D1.1/D1.1M or equivalent. (c) The diameter of stud shall be 16mm (5/8 inch.) for roof slab and 19 mm (3/4 inch.) for other slabs. (d) Before weld, length of 16mm (5/8 inch.) diameter stud shall be 65mm and that of 19mm (3/4 inch.) stud shall be 100mm.			
8.10.03	Installation and fixing (a) Headed shear studs shall be welded to top flange of floor beams either directly or through metal deck by Drawn Arc Stud Welding by stud gun with arc shields/ferrules. After welding, arc shields/ferrules shall be broken free from studs. (b) The distance between the edge of a stud and edge of steel beam flange shall not be less than 25mm. (c) In no case studs shall be welded through more than two plies of metal decking. (d) Stud welding procedure specification, procedure qualification record, operator/welder's qualification and acceptance norms shall conform to ASME IX.			
8.10.04	Workman ship (a) At the time of welding, the studs shall be free from rust, oil, moisture or other deleterious matter that would adversely affect the welding operation. (b) The studs shall not be painted, galvanized or cadmium-plated prior to welding. (c) The areas to which the studs to be welded shall be made free of scales, rust, moisture or other injurious material to the extent necessary to obtain satisfactory welds and prevent objectionable fumes. (d) The arc shields/ferrules shall be dry. Any shields/ferrule which shows signs of surface moisture from dew or rain shall be oven dried at 1200 C for two hours before use.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 143 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	(e) If there is any damage to the panting of steel members or metal deck sheet, same shall be repainted by the Bidder.			
8.11.0	AUTOCLAVE AERATED CONCRETE BLOCKS (AAC BLOCKS)			
8.11.01	General Requirements			
	Autoclave Aerated Concrete Blocks shall be used for external walls and internal partitions. They shall be factory made in the form of blocks.			
8.11.02	Codes and Standards			
	Some of the relevant Indian Standards are referred to here below:			
	IS-2185(III) - 1984	:	Aotuclaved Aerated Concrete Block.	
	IS-6041 - 1985	:	Construction of Autoclaved Aerated Concrete Block Masonary.	
	IS-6441 - 1972	:	Methods of Test for Autoclaved Cellular Concrete product.	
8.11.03	Material			
8.11.04	The blocks shall be made up of a mixture comprising of fine Fly Ash, quicklime, cement, gypsum as binding agents and water, aluminium powder as a foaming agent. The mixture shall be moulded into blocks of required shape and size and steam cured in high pressure Autoclaves.			
8.11.05	The general size of finished blocks shall have dimensions of 625mm x 250 mm, with thickness ranging from 100mm to 300 mm and shall conform to IS:2185 (part III), for dimension and tolerance.			
8.11.06	AAC blocks shall have the following physical properties :			
	- Density (over dry)	-	550-650 kg/cum	
	- Compressive Strength	-	Min. 30 kg / sq.cm	
	- Thermal Conductivity	-	0.162W/mk (avg)	
	- Resistant to fire	-	2-6 hrs depending upon thickness	
	- Drying shrinkage	-	0.02% (avg)	
	- Design gross density	-	800 kg/cum (approx)	
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS
PAGE 144 OF 234				

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.11.07	Installation & Laying Installation shall be done as per the working drawings. Laying of AAC Blocks masonry shall be in accordance with the recommendations of IS:6041 of 1985 and IS:1905 of 1987. This shall hold valid for other structural requirements like stiffening of masonry, joint reinforcements, etc. The jointing cement sand mortar in the composition of 1:6 (1 Cement : 6 sand) shall be used with suitable plasticizer. Sand having modules of fineness 1:1 shall be used. The horizontal & vertical joint thickness shall be approximately 10mm thick. In case of partition walls (100 mm / 125 mm) the joint reinforcement i.e. 1 number of 6-8 mm diameter bars shall be placed at every alternate course to be anchored properly with the main structure. Once the masonry erected, the curing shall be minimum, with more requirements at the joints. 5-6 courses shall be erected maximum in a day. Before plastering, cement slurry shall be applied on the walls and only leaner mix shall be applied. The thickness of the plaster shall be min. 12mm. The openings for doors, windows, ventilators, pipes, cables, ducts, fans, ACs etc. shall be created as required. Blocks shall be cut with a saw. Wherever chasing to be done in AAC Blocks, rotary cutters shall be used. The chases shall be refilled with lean mortar and chicken mesh applied on that area. While laying AAC blocks, safety precautions shall be taken for the safety of the requirement, structure and personnel located / working in the area.			
8.12.0	MODULAR AERATED CONCRETE PANELS			
8.12.01	General Modular aerated concrete panels shall be used for external walls and internal partitions. These shall be factory made in the form of modular panels.			
8.12.02	Material The panels shall be made up of two 4 mm thick cellulose fiber reinforced cement bonded plain sheets (as per IS:14862) on either side of a light weight concrete core composed of portland cement, fly ash, mica and sand aggregate. The compressive strength of concrete shall not be less than 35kg/sq.cm and the density shall be between 700-900 kg/cu.m. The thickness of the panel shall be 50 mm and 75 mm. The minimum fire rating as per BS:476 (Part-20 to 22) shall be 1 hour and 2 hours respectively for 50 mm and 75 mm panel thickness. The necessary certificate in this aspect shall be furnished by the contractor. The panel shall generally be of 600mm width and of varying length as per requirement. The flexural strength of panel shall be sufficient for their installation on a span of upto 4.5 m. and limiting the deflection to span / 250 under wind loading condition. The minimum thickness of U-channel shall be 1.25 mm and shall be galvanised to grade 180 as per IS: 277.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 145 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
8.12.03	All expansion fasteners / screws shall be of stainless steel from established and reputed manufacturers.			
	Silicone acrylic paste, glass fiber tape and all other material shall be of best quality from established and reputed manufacturers.			
	Installation (fixing in position)			
	Installation shall be done as per the working drawings			
	The contractor shall carry out the necessary design and get the third party testing done on the panels in order to establish that the deflection of the panels are limited to span/325 over a span of 4.5 m. corresponding to designed wind loading.			
	The U-channels shall be fixed to the concrete and/or to primary steel members (provided by the owner), which are placed at a maximum vertical spacing of 4.5 m. with the help of expansion fasteners. The spacing of the fasteners shall be decided from the consideration of the load transfer from U-channel to concrete/steel members. However, the minimum size of the fastener shall be 8 X 35 mm long placed at a maximum spacing of 600 mm C/C.			
	The panels shall be fixed in the U-channel with the help of screws (8x35 mm) and placed at a maximum spacing of 600 mm C/C or lesser, if required, as per design.			
	The panels shall be placed preferably in tongue and groove jointing system. The joints shall be subsequently finished on both faces with silicone acrylic paste. These shall be made water tight by application of glass fiber strip of minimum 50 mm wide and 0.5 mm thick and/or by any other suitable material.			
	The openings for doors, windows, ventilators, pipes, cables, ducts, fans, ACs etc. shall be created as required. The face of the opening shall be finished with the same U-channel as that been used for fixing of panels.			
	The total construction shall be weather proof and the surfaces shall be flush for painting. Undulations, if any, on the surface shall be finished with silicone acrylic paste.			
9.00.00	The complete installation of the panels shall be done in a mechanised way using power tools, hoists etc. All openings shall be neatly cut with the power tools.			
	While fixing the panels in position necessary safety precautions shall be taken for the safety of the equipment, structure and personnel located/working in the area.			
	Architectural Concepts and Design			
	9.01.00	For Architectural Concepts and Design refer to 5.00.01 in this specification.		
	9.02.00	General Architectural Specifications		
	9.02.01	General		
	a) Minimum 1000 mm high (from floor/ roof level) hand railing shall be provided around all floor/roof openings, projections/balconies, walkways, platforms, steel stairs, etc., wherever the height of the building is more than 12m, railing ht to be 1.2m. All handrails and ladder pipes (except at operating floors) shall be 32 mm nominal bore MS pipes (medium class) conforming to IS:1161 and shall be galvanised as per IS : 4736 and finished with suitable paint. All rungs and ladders shall also be galvanised. Minimum weight of galvanising shall be 610 g/sqm. The spacing of vertical posts shall be maximum 1500mm. Two number of horizontal rails shall be provided including the top			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 146 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	member. In addition, toe guard/ kick plate of min size 100x6th shall be provided above the floor level. In Service Building, Administrative Building, Plant Auditorium and Canteen Building RCC stairs and passages/ corridors hand railing with posts shall be made of stainless steel and be 1200mm high. For Atrium areas, same shall be provided with 10mm thick laminated Glass infill panels. For RCC stairs, passages & Atriums in buildings, around all floor openings at operating floors, 1000 mm /1200mm high hand railing with 32 NB (polished) stainless steel pipe shall be provided. The spacing of vertical posts shall be 1500mm. Two number of horizontal rails shall be provided including the top member. Toe guard and kick plate shall be provided above the floor level. b) All stairs shall have a maximum riser height of 180mm and a minimum tread width of 275 mm. Minimum clear width of stair shall be 1200 mm unless specified otherwise. For Administration Building& Service Building, stairs width shall be minimum 1500 mm, with Riser 150mm and Tread 300 mm. c) All buildings having metal cladding shall be provided with a 150 mm high RCC toe kerb at the edge of the floor along the metal cladding. 1000 mm high hand railing shall be provided on this RCC kerb, wherever required from the safety point of view. d) In all buildings, structures, suitable arrangement for draining out water collected from equipment blowdowns, leakages, floor washings, fire fighting, etc., shall be provided for each floor. All the drains shall be suitably covered with grating or precast RCC panels. e) RCC staircase shall be provided for main entrance of Turbine building; control tower area and all other RCC construction buildings. f) Parapet, Chajjas 450mm over window and 600mm door heads,750mm over rolling shutters, architectural facias, projections, etc., shall be provided with drip course in cement sand mortar 1:3. g) All fire exits shall be painted with fire resistant paint P.O red/signal red colour shade which shall not be used anywhere except to indicate emergency or safety measure. Fire safety norms shall be followed as per National Building Codes and fire safety requirements for providing fire exits, escape stairs and fire fighting equipment. In detailing of all buildings, fire safety requirements conforming to IS: 1641 and IS:1642 shall be followed. h) Ramps & Lifts for physically challenged persons shall be provided for barrier free access to the buildings.			
9.03.00	Water Supply and Sanitation			
9.03.01	Two numbers of roof water tanks (one for storing service water and another for potable water) of adequate capacities depending on the number of users and 8 hours requirement shall be provided for each building and pump house. Polyethylene water storage tanks conforming to IS:12701 shall be used. The tanks shall be complete with all fittings including lid, float valve, stop cock, vent pipe, etc. Galvanised MS pipe of medium class conforming to IS: 1239 shall be used for internal piping works for service water and potable water supply. The pipes shall be concealed, and painted with anti-corrosive bituminous paint (as per IS: 158) wherever required.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 147 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS				
9.03.02	Sand Cast Iron pipes with lead joints conforming to IS: 1729 shall be used for sanitary works above ground level. All Buildings shall be designed with Toilets as per NBC norms. Minimum one number main toilet block for Gents & ladies separately, with required facilities shall be provided on each floor of Service building Administration building and Canteen building. Toilets for physically handicapped shall be provided as mentioned. Attached toilets shall be provided for all senior executive rooms and conference rooms. All other buildings shall have minimum one toilet block each. The facilities provided in the toilet block shall depend on the number of users. However, minimum facilities to be provided shall be as stipulated in subsequent clause. IS:1172 shall be followed for working out the basic requirements for water supply, drainage and sanitation. In addition, IS:2064 and IS:2065 shall also be followed.				
	Each Toilet block shall have the following minimum facilities. Unless specified all the fittings shall be of Chromium plated brass (fancy type). For GRIHA rated Buildings all fittings shall conform to GRIHA requirements, for water efficiency.				
	a) One number wall mounted coloured (excluding premium colours) glazed vitreous China European water closet and flushing valve system, water faucet, toilet paper holder as per IS:2556				
	b) One number white glazed vitreous China Orissa pan (580 x 440 mm) and flushing valve system, toilet paper holder as per IS:2256				
	c) One number colour (excluding premium colours) glazed ceramic oval shaped wash basin 450x 550 mm (approx.) mounted over 20mm thick granite beveled edge counter fitted with photo-voltaic control system for water controls, bottle trap as per IS:2556. For common toilets, number of washbasins shall be as per requirement. However for Pump Houses the same shall be provided without photo voltaic control system for water control.				
	d) For Male Toilets Urinal as per requirements, with all fittings with photovoltaic control flushing system as per IS: 2556.				
	e) One number looking mirror 600 x 900 x 6 mm, edge mounted with teak beading and minimum 12 mm thick plywood backing, one number stainless towel rail 600 x 20 mm, one number liquid soap dispenser				
	f) One toilet with required facilities shall be provided for physically challenged persons as per National Building Code requirements in GRIHA rated buildings.				
	g) In addition to the facilities stipulated elsewhere Bathroom with rotating type chromium plated shower including all fitting and fixtures shall also be provided in toilet at ground and operating floor of main plant and any other building as per functional requirement.				
	h) Janitor Space & space for drinking water cooler.				
i) Electric operated hand dryer with photo voltaic control.					
j) The pantry shall consist of one number stainless steel pantry sink, as per IS : 13983, of size 610 x 510 mm, bowl depth 200 mm with drain board of at least 450 mm length with trap, hot and cold water mixer, one number geyser of 25 liters capacity, with inlet and outlet connections, one number HDPE loft type / over head water storage tank, as per IS : 12701 and of 500 liters capacity, complete with float valve, overflow drainage pipe arrangement, GI concealed water supply pipe of minimum 12					
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS	PAGE 148 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
9.04.00	mm dia of medium class, cast iron sanitary pipe (with lead joints) of minimum 75 mm diameter, floor trap with Stainless			
	Steel grating, inlet and outlet connections for supply and drainage, with all bends, tees, junctions, sockets, etc., as are necessary for the commissioning and efficient functioning of the pantry (all sanitary fittings shall be heavy duty chrome plated brass, unless noted otherwise)			
	k)	Laboratory sink shall be of white vitreous china of size 600x400x200 mm conforming to IS:2556 (Part-5).		
	l)	In addition, adequate number of portable toilet units with adequate plumbing and sanitary arrangement, shall be provided during construction stage.		
	Flooring			
	Floor finishes of approved shade and colour (non - premium colours), over under bed of cement mortar / concrete, at all levels and for all kind of works, elevations, on horizontal and vertical surfaces for all types of work (like flooring, skirting, dado, wall lining & facing, tread and risers etc.), including topping, spreading white cement slurry at an average rate of 2.5 kg/Sq. M., (unless noted otherwise), jointing and joint filling with white cement (unless noted otherwise) slurry mixed with colour pigment, to match the shade of the finishing material, laying to plumb and water level in desired pattern, line and flush butt square jointing, curing, rubbing, grinding, polishing, edge moulding, finishing and cleaning, testing, providing opening of required size and shape, casting in panels wherever specified.			
	9.04.01	The nominal total thickness of floor finish shall be 50 mm i.e. underbed and topping. The floor shall be laid on an already laid and matured concrete base. The underbed for floors and similar horizontal surfaces shall consist of cement concrete M20 grade (1 part cement, 1.5 part sand and 3 part stone chips by volume). Stone chips shall be 12.5 mm down well graded(& proper filling shall be done with brick bats/cinders). Flooring like Tiles/ Stones shall be laid with 1:4 cement sand mortar and Tile/ Stone Cladding on wall shall be laid with 1:3 cement sand mortar.		
	9.04.02	Sunken slabs shall be made water tight by suitable water proofing treatment.		
9.04.03	Metallic hardener topping -with ordinary grey cement shall be- 12 mm thick (insitu) or finishing the concrete / mortar surfaces topping shall be furnished with neat cement slurry (with ordinary grey cement)			
9.04.04	Heavy duty cement concrete tiles 300 mm x 300 mm shall be in using white cement with pigment, with hard and abrasion resistant carborundum / quartz chips for wearing course as per IS:1237. Laying of tiles shall be as per IS: 1443.			
9.04.05	Heavy duty (grade-5) dust pressed ceramic tiles (300mmx300mm shall be as per IS 15622. Designer ceramic wall tiles of size 300 mm x 200 mm / (300x600mm).			
9.04.06	20mm / 38mm / 75 mm/ 115mm thick acid resistant tile on horizontal and vertical surfaces, at all levels for all type of works shall include one coat of bitumen primer followed by 12 mm thick bituminastic layer, 20mm / 38mm/ 75 mm / 115mm thick A.R. tiles, 6 mm thick under-bed by potassium silicate mortar, pointing of joints of tiles with acid/alkali resistant epoxy/furane mortar up to a depth of 20 mm and bituminastic end sealing.			
9.04.07	Mirror polished/ Matt finish (80:20) Vitrified ceramic tiles (min 9.5mm thk) with 3mm groove joints as per approved pattern pointed neatly with 3X4mm stainless epoxy grout SP- 100 of			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 149 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	Laticrete or approved equivalent in approved colour to match colour of tile. Sizes of the tiles shall be as under:			
	a) 600 mm x 600 mm			
	b) 800mm x 800mm			
9.04.08	For pathway, chequered and designed concrete tiles minimum 22 mm thick, 200x200 mm size conforming to IS: 13801 of approved shade and colour shall be used. 1000 wide pathways shall be provided for maintenance on rooftops of all buildings.			
9.04.09	PVC flooring, wherever used, shall be minimum 2 mm thick (virgin) as per IS: 3462. The laying of flooring shall be as per IS: 5318.			
9.04.10	Epoxy Flooring			
	Epoxy Flooring shall be provided with surface preparation of concrete substrate with Captive Shot Blasting Machine OR Light Grinding to form the required anchor profile on the floor substrate followed by application of epoxy resin based moisture barrier underlay of 2 mm thickness including filling of saw cut joints with epoxy cementitious resin based moisture barrier underlay as per manufacturer specification. Application of self smoothing epoxy floor topping of epoxy based resin of 2 mm thickness over epoxy resin based moisture barrier underlay including application of solvent free epoxy resin based two component primer.			
	It shall include application of PU Sealant at Expansion and Isolation Joint respectively including surface preparation of the joint, fixing of backup strip and application of sealant.			
9.04.11	Wherever required, carpet flooring shall be provided over cement concrete floor as in conference room of main control room complex. The carpet shall be of tile/roll form, machine/hand made tuped un-cut loop pile and lay with under lay of 10mm thick and shall be laid as per manufacturer's recommendations, in matching grains. It shall be treated with anti fungus and anti-termite before laying.			
9.04.12	Mirror polished (6 layers of polish) Granite stone (slab) - 20 mm Thk (minimum) shall be provided in areas as mentioned in finishing Schedule. Flame finish (making top surface rough by burning / shot blasting) granite stone (slab) - 20 mm Thk (minimum) shall be provided in ramps for Physically Challenged Persons in Administration building, Service Building, Auditorium Building and Canteen Building.			
	Mirror polished Marble stone (slab) - (Rajnagar) Plain white -20 mm thick shall be provided in main stairs & 18mm thick kota stone shall be provided in the fire escape stairs.			
9.04.13	Decorative/designer prepolished, plain and pigmented, high wearing resistance concrete tiles of 20mm thickness (minimum) in various non-standard interlocking patterns.			
9.04.15	Skirting in general shall be 150 mm high. Dado in toilets & pantries, shall be upto 2200 mm height from finished floor level. Dado shall match with the floor finish.			
9.04.16	Wherever required, removable metallic false flooring system shall be provided. Nominal height of the false flooring shall be 600 mm. The same shall comprise of special grade steel panels (of size 600x600mm). without any dimensional tolerance 1.2mm thick die cast to shape having 1mm thick top MS sheet spot welded together to form a composite steel panel, sitting on aluminum diecasted heads & mounted on steel pedestals of 25mm dia rod of adjustable height and supporting 1.2mm thick channel frame work at-top and 2mm thick 150x150mm base plate. The top finish shall be 2mm thick antistatic PVC sheet or High			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 150 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	pressures laminate. Cavity area below the false flooring shall be made dust proof by using Polyurethane paint.			
9.04.17	Interlocking concrete blocks shall be of various sizes and thickness having M 35 grade of concrete and pigmented to specified colours, in different pattern (in different textures chequered or other patterns in indentation for guiding band/s for visually impaired persons) including the preparation of sub base with 20mm thick sand and filling of joints with sand.			
9.04.18	Matt finish (with grooves) Porselin tiles (for guiding band/s for visually impaired persons) shall be with 3mm groove joints as per approved pattern pointed neatly with 3X4mm stainless epoxy grout SP- 100 of Laticrete or approved equivalent in approved colour to match colour of tile.			
	24 mm x 24 mm x 3.8 mm thick (minimum) glass mosaic tiles in decorative murals and pattern.			
	Laminated wooden flooring shall be provided in VIP area, conference rooms & auditoriums.			
9.04.19	Paving a) Ground floor of all buildings shall be provided with normal duty paving with 50mm thick metallic hardener floor finish. For details of normal duty paving refer to description elsewhere in this specification. b) PCC paving of nominal mix 1:2:4 (1 part cement: 2 parts sand: 4 parts aggregate), 100 mm thick laid over 75 mm thick bed of dry brick aggregate shall be provided for following areas: i) 750 mm wide plinth protection around all buildings other than those covered under paved area. ii) 2.0 m wide pathway all along pipe/ cable corridor and all around each cooling tower. 2.0 mm wide ways inter connecting all cooling towers with each other.			
9.05.00	Acid/ Alkali Resistant Lining			
9.05.01	The material shall conform to the following: i) Bitumen primer shall conform to IS: 158. ii) Bitumastic compound shall conform to IS: 9510. Where the height of bitumastic layer on vertical surface is more than 2.0 m, the bitumastic layer shall be reinforced with diamond pattern expanded metal steel sheets conforming to IS: 412. iii) A.R. Bricks/ Tiles shall conform to class II of IS: 4860 & IS: 4457 respectively. iv) Mortar: Potassium silicate & resin type mortars shall conform to IS: 4832 Part-I&II respectively.			
9.05.02	Requirements for acid/ alkali resistant flooring and lining for different areas shall be as given Table-A enclosed at the end of this specification. Battery Room in all buildings shall be provided with acid/ alkali resistant tiles on flooring & dado 1200mm high.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 151 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
9.06.00	Roof			
9.06.01	Except for the roofs subjected to heavy loads, roof of all buildings having structural steel frame work shall consist of permanently colour coated (on exposed face) troughed metal sheet decking of approved profile having minimum base metal thickness of 0.8mm of galvanised (with minimum rate of galvanisation of 275 gm/sq.m.) M.S. sheet or minimum 0.8mm of high tensile steel (minimum yield strength 350 MPa) coated with zinc aluminium alloy (zincalume) (coating not less than 150 gm./sq.m). Silicon modified polyester pain having DFT of minimum 20 microns shall be used for permanent coating. The sheeting shall be fixed by means of concealed fixing system or any other compatible method approved by the Engineer. RCC slab of minimum 40 mm clear thickness in excess of trough depth shall be provided over the metal decking. Water proofing cum plasticiser compound shall be added to concrete over the metal decking. Bidder shall demonstrate that the roof is leak proof by carrying out the water-retaining test by maintaining the minimum water depth of 50mm over the roof surface for a period of 48 hours. Water Proofing Treatment as given below for RCC roof slabs shall be provided to ensure that the roof is watertight.			
9.06.02	Roof of all buildings having RCC framework shall have cast-in-situ RCC slab. Such roof shall be provided with roof water proofing treatment using high solid content liquid applied elastomeric water proofing membrane with separate wearing course as per ASTM - C-836 & 898. Thickness of the membrane shall be 1.5mm (min.). This treatment shall include application of polymerised mastic over the roof to achieve smooth surface and primer coat. Wearing course on the top of membrane shall consist of 25mm thick PCC (1:2:4) cast in panels of maximum 1.2 x 1.2m size and reinforced with 0.56mm dia galvanised chicken wire mesh and sealing of joints using sealing compound/elastomeric water proofing membrane. However, chequered concrete tile flooring 22 mm (min.) thick of approved colour and shade conforming to IS: 13801 shall be provided for path way of 1 m. width for access of personnel and handling of equipment and for the entire area of the roof where equipment like AC / Ventilation plant, cooling towers, etc. are provided in place of PCC wearing course. Equipment shall be installed on raised pedestal of minimum 30 cm height from the finished roof to facilitate maintenance of roof treatment in future.			
9.06.03	For efficient disposal of rainwater, the run off gradient for the roof shall not be less than 1:100 and the roof shall be provided with RCC water gutter, wherever required. Gutter shall be made water tight using suitable watertight treatment. This gradient can be provided either in structure or subsequently by screed concrete 1:2:4 (using 12.5 mm coarse aggregate) and/or cement mortar (1:4). However, minimum 25 mm thick cement mortar (1:4) shall be provided on top to achieve smooth surface.			
9.06.04	For Building where metal cladding is envisaged medium class galvanised mild steel pipes conforming to IS: 1239/IS:3589 with welded joints shall be provided to drain off rain water from the roof. For rest of the buildings cast-iron pipes with lead caulked joints conforming to IS:1230 shall be used. These shall be suitably concealed with masonry work, cement concrete / or sheeting work to match with the exterior finish. The number and size of down comers shall be governed by IS:1742 and IS:2527. Roof drain level of all RCC framed buildings having cast-in-situ RCC roof shall be provided with Rain water gutter and/or 45 x 45 cm size Khurras having minimum thickness of 30 mm with 1:2:4 concrete over PVC sheet of 1 m x 1 m x 400 micron and finished with 12 mm thick cement sand plaster 1:3. All the pipes shall be provided with suitable fittings and fixtures. Gratings shall be of stainless steel.			
9.06.05	Roof of the buildings shall conform to minimum 4 star GRIHA Rating shall have Overdeck insulation of minimum 40 mm thick impervious sprayed close cell free rigid Polyurethane foam confirming to IS: 12432 Part-III, with density of foam 40 TO 45 KG/ cum. Overdeck insulation shall be fixed over a coat of polyurethane primer applied @ 6 to 8 litre/ sqm, applied over cleaned surface of cement sand mortar (1:4) screed (laid for the part of Roof Water Proofing Treatment. 400 Gauge polythene sheet shall be laid over polyurethane			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 152 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
9.06.06	Roof Water Proofing			
	Roof water proofing treatment shall be as follows:			
	a)	For roofs having structural slope:		
		Top surface of sloped R.C.C. slab shall be finished with 15mm thick cement plaster (1:4). Over the finished surface elastomeric membrane shall be laid. The elastomeric shall comprise of high solid content liquid applied urethane laid over reinforcing layer of polyscrim cloth or non woven geo-textile. The top of the elastomeric membrane shall be finished with 20 mm thick cement: sand (1:4) mortar with chicken wire mesh and pressed precast concrete tiles of 20 mm thickness wherever applicable shall be laid over mortar at green stage. Provision for thermal expansion of roofing tiles shall be kept by providing an expansion gap in both directions filled up with polysulphide joint sealant. The expansion gap shall be provided in the cement sand mortar underbed layer also.		
	b)	For roofs having no structural slope:		
		Screed concrete mix (M-15 grade) grading having minimum 25mm thickness at the lowest point of the slope shall be laid over R.C.C. slab and shall be laid as per the slope specified elsewhere in the specification. Top surface of grading underbed shall be finished with 15mm thick cement plaster (1:4). Over the finished surface elastomeric membrane shall be laid and top of the elastomeric membrane shall be finished with 20 mm thick cement: sand (1:4) mortar with chicken wire mesh and pressed precast concrete tiles of 20 mm thickness where applicable shall be laid over mortar at green stage. Provision for thermal expansion of roofing tiles shall be kept by providing an expansion gap in both directions filled up with polysulphide joint sealant. The expansion gap shall be provided in the cement sand mortar underbed layer also		
9.06.07	Roof of all buildings shall be provided with access/approach through staircase or ladder. Roof where equipment are mounted shall be provided with access through staircase.			
9.06.08	RCC parapet wall of minimum 1000 mm height (above top of slab) for all accessible roofs and 600 mm height for all non-accessible roofs shall be provided. Alternatively parapet wall comprising structural steel post, runner and sheeting may be provided for buildings with metal sheet cladding.			
9.06.09	Fillets at junction of roof and vertical walls shall be provided with cast-in-situ cement concrete (1:1.5:3) nominal mix followed by 12mm thick 1:4 cement sand plaster.			
9.06.10	Pathways for handling of materials and movement of personnel shall be provided with 22mm thick chequered cement concrete tiles as per IS:13801 for a width of 1000mm .			
9.07.00	Walls			
9.07.01	All walls shall be non-load bearing infill panel walls.			
9.07.02	For initial height up to 3 metres from ground floor one brick thick masonry wall shall be provided wherever metal cladding is specified.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS
				PAGE 153 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS		
9.07.03	All internal walls shall be with one brick thick in cement sand mortar (1:6). However, internal partition walls for toilets shall be with half brick masonry with cement sand mortar (1:4).		
9.07.04	For Administration building, Service Building, Auditorium Building and Canteen Building Autoclaved Aerated Concrete blocks shall be used. Autoclaved Aerated Concrete (AAC) block masonry shall be with blocks having dimensions of 625 mm x 250 mm thickness ranging from 100 mm to 300 mm conforming to I.S. :2185(part-III) .The jointing cement sand mortar in the composition of 1: 6 (Cement: sand) shall be used with suitable plasticizer(optional). Sand having modulus of fineness 1.1 shall be used. The horizontal and vertical joint thickness shall be approximately 10 mm. In case of partition walls (100 mm /125 mm thk.) the joint reinforcement i.e. 1 number of 6-8 mm diameter bars shall be placed at every alternate course to be anchored properly with the main structure. All other structural requirements like stiffening of masonry , joint reinforcement etc. in the AAC masonry work strictly be carried out as per instructions laid down in .I.S 6041 – 1985, I.S -1905.		
9.07.05	For control room , control equipment room and ESP building wall shall be of factory made composite modular light weight aerated concrete panels,(minimum 4 hours of fire rating) consisting of 2 fiber reinforced cement sheets (minimum 4 mm thick) on either side of light weight concrete core, having minimum compressive strength of 35 Kg / Cm2 and the density in the range of 700-900 Kg. / cu.m. of the thickness and fire rating as specified below, to provide external wall and internal partition at all levels, capable of sustaining wind pressure of 4.50 M height (H) within limiting deflection of span/250, fixed in position in tongue and groove jointing system by screwing the panels to top and bottom U channels, (channels minimum 1.25 mm thick and galvanised to grade 180 (minimum) as per IS : 277), fixing U profiled top and bottom channels to concrete / primary steel members which are placed at the maximum vertical spacing of 4.5m with the help of galvanised steel expansion fasteners, filling the joints from both faces with silicon acrylic paste and making the same water tight by covering with fibre glass tape (minimum 50 mm wide and minimum 0.5 mm thick) or by any other suitable material, so as to ensure that the entire construction done with the light weight aerated concrete panels are weather proof and panel surfaces are flush for painting, creating opening for doors / windows /ventilators / ducts / pipes/fans/AC etc. and finishing the opening face with the same U profiled galvanized steel channel which is used at the top and bottom.		
9.07.06	For Main plant building, Control tower and other buildings, the type, thickness and initial height of external cladding facing the transformer yard shall be according to the requirements. External face of Toilets, Air-conditioned and pressurised areas shall be provided with masonry wall as per functional / aesthetic requirements. (Inside the metal cladding wherever provided).		
9.07.07	50 mm thick DPC in Cement concrete (1:1.5:3) with water proofing compound followed by two layers of bitumen coating 85/25 grade as per IS:702 @ 1.7 kg./sq.m. shall be provided at plinth level before starting the masonry work.		
9.08	Plastering		
9.08.01	Outer face (i.e. rough side) of all brick walls shall have 18 mm thick and inner face (i.e. smooth side) of all walls shall have 12 mm thick cement sand plaster 1:6.		
9.08.02	Preparation of all types of plastered and / or exposed concrete surface, in all kind of works,at all levels, by providing minimum 2mm of polymer based water resistant putty (wall putty) to give an even and smooth surface.		
9.08.03	All R.C.C. walls shall have minimum 12mm thick cement sand plaster 1:6.		
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS
			PAGE 154 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS	एनटीपीसी NTPC	
9.08.04	All RCC ceilings (except areas provided with false ceiling, cable vault ceiling and metal decking) shall be provided with 6mm thick cement sand plaster 1:4.		
9.08.05	Groove of uniform size 12 x 12 mm up to 20 x 15 mm in plastered surface as per approved pattern, shall be provided as per approved drawing.		
9.08.06	All plastering work shall conform to IS:1661.		
9.09	Painting & Aluminium Composite Panel Cladding		
9.09.01	All painting on masonry or concrete surface shall preferably be applied by roller. If applied by brush then same shall be finished off with roller.		
9.09.02	All paints shall be of approved make including chemical resistant paint.		
9.09.03	Minimum 2 finishing coats of paint shall be applied over a coat of primer.		
9.09.04	Premium Acrylic Smooth Exterior Paint: The paint should be applied in minimum 2 coats @1.43litre/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm, on new plastered surfaces inclusive of all required tools, material, scaffolding and other painting accessories etc. The paint shall be applied as per the manufacturer's specifications and instructions and to the entire satisfaction of engineer-in-charge. The paint shall have excellent water resistant property.		
9.09.05	Stone work for wall lining etc. (Veneer work) over 20 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand) and jointed with grey cement slurry @3.3kg/sq.m, including rubbing and polishing in complete. (Black polished granite stone slab, 20 mm thk / polished Sadarhally grey granite slab 20 mm thk). The final, finished coating shall be fungus resistant, UV resistant, water repellant, alkali resistant, and extremely durable with colour fastness.		
9.09.06	Acrylic emulsion paint shall be as per IS:15489. Acrylic distemper shall be as per IS:428. Cement paint shall conform to IS:5410, white wash/colour wash shall conform to IS:627.		
9.09.07	Fire resistant transparent paint as per IS:162 shall be provided on all wood work over French polish or flat oil paint. French polish shall conform to IS:348. Flat oil paint shall conform to IS:137.		
9.09.08	All fire exits shall be painted in post office red/signal red colour shade, which shall not be used anywhere else except to indicate emergency or safety measure.		
9.09.09	For painting on concrete, masonry and plastered surface IS: 2395 shall be followed. For painting on wood work IS: 2338 shall be followed.		
9.09.10	For painting on steel work and ferrous metals, BS: 5493 and IS: 1477 shall be followed. The type of surface preparation, thickness and type of primer, intermediate and finishing paint shall be according to the painting system adopted.		
9.09.11	Bitumen primer used in acid/alkali resistant treatment shall conform to IS:158.		
9.09.12	All internal paints shall be of low VOC content conforming to GRIHA rating for reduction of VOC content.		
9.09.13	Resin bonded granular textured finish, for external applications shall consist of crushed stone / quartz chips of 2.5 mm size and of approved colour/ shade and bonded with synthetic		
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS PAGE 155 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
9.09.14	resins, Adhesives and additives, all together in a single pack mix. For internal finish 1.2mm of approved, colour & shade (pigmented granular or flake finish) The final finish shall have UV-Resistant, fungus/bacterial resistant properties. Grooves shall be provided as per drawing and the same shall be filled with polysulphide sealant of matching colour/shade.			
	Aluminium Composite Panel Aluminum Composite Panels for external wall cladding at all heights and elevation shall be fixed on to the supporting steel members, masonry wall, fastening material and hardware complete with all labour, material, equipment, handling, transportation, workmanship, preparation of working drawings, staging, scaffolding, etc., all complete. The aluminum composite panel should consist of 3mm thick thermoplastic core of anti oxidant LDPE sandwiched between 2 skins of 0.5mm thick aluminum alloy sheet making a total panel thickness of 4mm. The surface shall be finished with PVDF based coating of minimum 30 micron on the topsides and services coating on the reverse side shall be with polymer paint. Coating shall conform to ECCA or AAMA.the surface shall be protected with self adhesive peel of masking foil. The system shall be designed to withstand a wind pressure of 200kg/Sqm and shall be fixed to he Masonry/RC walls with necessary clamps, brackets and anchor fasteners. All clamps and brackets shall be Hot dip galvanized minimum 80 microns thick and shall conform to IS: 4759-1996. The extruded aluminum section shall be anodized in approved colour with a anodic coating of minimum 20 microns. Extruded section shall be 6063 T5 or T6 alloy conforming to ASTM B221. Any other festering straps, nuts, bolts, rivets, washers, etc. shall be in stainless steel SS304 grade. EPDM gaskets, open cell polyethylene backer rods, weather sealant etc. shall be provided as per requirement. Aluminium Composite Panel for internal encasement shall be with II B fire rated LDPE core mixed with mineral fibre.			
	Doors & Windows			
	Doors, windows and ventilators of air-conditioned areas, entrance lobby of all buildings (where ever provided), and all windows and ventilators of all buildings (unless otherwise mentioned) shall have, electro colour dyed (anodised with 15 micron coating thickness) aluminium framework with glazing. All doors of toilet areas shall be of steel framed solid core flush shutter. For Mill Bunker Building, transfer points, crusher house, conveyor gallery, steel louvered windows shall be provided.			
9.10.02	Main entrance of the common control room and control equipment room shall be provided with air-locked lobby with provision of double doors of aluminium framework with glazing. Doors shall be of double action floor springs mounted.			
9.10.03	For common control room building 120 minutes Fire Rated Fully Glazed non load bearing fixed partition with valid fire test certificate from national or international lab shall be provided. The Partition Frame shall be manufactured from minimum 2.0mm galvanized steel sheet pressed to form a profile of nominal size 60mm x 70 mm & fixed to the supporting construction by means of M 10 X 120 or bigger steel bolts at 300mm from the edges & every 500mm c/c. The frame shall be finished with etch primer for scratch resistance and shall be powder coated of approved shade and color. The glass panels shall be minimum 11mm thick, 120 minute fire rated, with 15 minute full insulation non wired toughened glass having a sound reduction of greater than 37dB, light transmission of 87% and compliant to class 1B1 category of impact resistance as per EN 12600. The glass shall be held in position with minimum 1.6mm G.I Beading, clamped or bolted to the frame profile by 4mm x 35mm steel screws at every 250 mm c/c and a ceramic tape of cross section of 5mm x 20mm on both			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 156 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	sides of the glass. The item shall include in tumescent putty and fire resistant acrylic sealants and the total assembly shall satisfy the fire resistance criteria of stability, integrity & partial insulation. For Auto sliding doors, all necessary hardware with same fire rating shall also be provided. Shop drawings for the item with all construction and anchoring details along with fire rating test reports shall be got approved from Engineer-in-Charge before execution.			
9.10.04	Single glazed panels with aluminium framework shall be provided as partition between two air-conditioned areas wherever clear view is necessary.			
9.10.05	a) The doors frames shall be fabricated from 1.6 mm thick MS sheets and shall meet the general requirements of IS:4351. b) All steel doors shall consist of double plate flush door shutters. The door shutter shall be 35 mm (min.) thick with two outer sheets of 1.2 mm rigidly connected with continuous vertical 1.0 mm stiffeners at the rate of 150 mm centre to centre. Side, top and bottom edges of shutters shall be reinforced by continuous pressed steel channel with minimum 1.2 mm. The door shall be sound deadened by filling the inside void with mineral wool. Doors shall be complete with all hardware and fixtures like door closer, tower bolts, handles, stoppers, aldrops, locks etc.			
9.10.06	Steel windows and ventilators shall be as per IS:1361 and IS:1038.			
9.10.07	Wherever functionally required Rolling shutter (fully closed/partly grilled) with suitable operating arrangement (manual/Electric) shall be provided to facilitate smooth operations. Rolling shutters shall conform to IS:6248. M.S sliding doors with suitable mechanical and electrical operations fixtures as per requirement for bigger openings shall be used.			
9.10.08	All windows and ventilators on ground floor of all buildings shall be provided with suitable Aluminium grill.			
9.10.09	Fire-Proof doors with panic devices shall be provided at all fire exit points as per requirements. These doors shall generally be as per IS:3614 Part-II. Fire rating of the doors shall be of minimum 2 hours. These doors shall be double cover plated type with mineral wool/wood insulation.			
9.10.10	Hollow extruded section of minimum 2 mm wall thickness as per IS: 1285 shall be used for all aluminium doors, windows and ventilators.			
9.10.11	Minimum size of door provided shall be 2.1 m high and 1.2 m wide. However for toilets minimum width shall be 0.75 m and office areas minimum width shall be 1.20m.			
9.10.12	Electrically operated, self operable/closing, aluminium framed with tinted glass Automatic Sliding operating system for Glass doors comprising of Advanced DC brushless motor, Automatic Reversing Safety Device, Suitable for door weight 100 kg, Opening speed : 90-110cm /sec (adjustable), Closing Speed : 40-110cm/sec (adjustable), opening time : within 1-9 seconds after door stopped in opening, controller : 8 Bit micro computer, Motor (Dortexor equivalent) : DC12V, 35W brushlees motor, Power Voltage : AC 110V - 240V. 50Hz - 60Hz, Power Consumption : 45W including Infra Red Sensors 2No both sides, make of best and approved quality shall be provided.			
9.11.00	Glazing			
9.11.01	All accessible ventilators and windows of all buildings shall be provided with min. 4mm thick float glass, plain or tinted for preventing solar radiations, unless otherwise specified.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 157 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS	एनटीपीसी NTPC		
9.11.02	All inaccessible (where regular maintenance is not feasible) ventilators and windows of all buildings shall be provided with 6mm thick clear toughened glass. 2 mm thick polycarbonate sheet with profile matching with metal sheeting shall be provided in TPs, conveyor galleries and Mill Bunker Building. The Polycarbonate sheets shall be fire and u/v resistant, and suitable for continuous use up to a temperature of 100 ⁰ C. Suitable aluminium beading shall be used. The open ends of the sheet shall be sealed as per manufacturer's recommendations.			
9.11.03	Sky light structure shall be provided as per design in curved shape 1m. wide and in 0.30M height, with 4mm embossed clear translucent polycarbonate IR sheet both side UV coated minimum 55% light transmission, solar control, approved make, texture and shade, fixed to powder coated Aluminium section with 60mm width top & bottom with EPDM rubber gasket as per standard framing including fabrication and erection of structural framing in square MS tubes to obtain the required shape, painting of structural members with adequate provision for expansion including all fittings, anchoring accessories, fixtures, joint sealing with EPDM gasket & weather sealants to make the complete structure water proof, fittings & fixing the complete skylight structure to RCC / Steel structural member, wastages etc. complete with all labour, scaffolding, material, equipments, handling, transportation, workmanship, preparation of working drawings including structural design, all complete, as per specifications, drawings and instructions of the Engineer-in-charge. The contractor shall submit the design and detailing of the structure much in advance (before casting of A-B Bay roof) to Engineer -in - charge to ensure the proper size and placement of insert plate for supporting structure. Supporting structure shall be painted as specified for other steel structures. The metal decking shall be cut smoothly in the area of sky light just before the placement of sky light.			
9.11.04	All windows and ventilators located in fire prone areas shall be provided with minimum 6 mm thick toughened glass conforming to IS:5437.			
9.11.05	For single glazed aluminium partitions and doors, 8mm or 10 mm thick clear toughened glass shall be used.			
9.11.06	Toughened glass of 6mm thickness shall be used for all windows/ventilators in toilets.			
9.11.07	All glazing work shall conform to IS:1083 and IS:3548.			
9.11.08	For main plant glazings, 6mm thk. reflective toughened glass, with following technical characteristics: Solar factor 45% or less, U-value less than 5.7 W/m2.K, VLT min 40%: The glass to be used should be from the manufacturers of glass like Saint Gobain (India) or ASAHI (India) or equivalent. The glass should be free from distortion and thermal stress..			
9.11.09	For glazings of Air Conditioned Buildings Composite double glazing shall be 24mm thick consisting of 6mm thick clear toughened glass on inner side and 6mm thick reflective toughened glass on outer side. The two glasses shall be separated by 12mm air-gap and hermetically sealed by beading of anodized aluminium with outer edge sealed with silicon sealant. Outer glass of 6mm thickness shall have following technical characteristics: Solar factor 25% or less, U-value less than 2.268 W/ SQMK,VLT min 30%: The glass to be used should be from the manufacturers of glass like Glavebel (Belgium), Saint Gobain (France) or Fort (USA) Or equivalent. The glass should be free from distortion and thermal stress. For CER & Control room, 24 mm thick hermitically sealed double glazing with toughened, fire resistant plane glass & tinted glass shall be provided. For glazing in non A/C areas of A/C Building single 6mm thick reflective glass shall be provided.			
9.11.10	Glass block masonry work with glass blocks of size 190 x 190 x 90 (min), jointed with suitable adhesive complete as per the best construction practices.			
9.11.11	For internal glazed partition, 8mm thick & 10mm thick clear toughened glass shall be provided.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 158 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS	एनडीपीसी NTPC		
9.12.00	False ceiling			
9.12.01	False ceiling of 12.5 mm thick tapered/square edge glass fibre reinforced gypsum board conforming to IS : 2095 having fine texture finish, including providing and fixing of frame work at all levels, for all kind of work, consisting of light weight galvanised steel member (minimum 0.8 mm thick and galvanised as per IS : 277) having maximum grid size of 1200 mm x 600 mm for supporting panels of specified size, suspended from RCC structural steel or catwalkway grid above, with 4 mm (minimum) galvanised wires (rods), with special height adjustment clips, providing angle section of minimum 25 mm width along the perimeter of ceiling, supporting grid system (minimum 0.8 mm thick and galvanised as per IS : 277), expansion fasteners for suspension arrangement from RCC, providing openings for AC ducts, return air grills, light fixtures, etc., all complete. (concealed grid and finished flat seamless and curve shape (dome etc.), finished smooth(seamless) along with the galvanised light gauge steel supporting system laid in profile to suit the profile of dome)			
9.12.02	False ceiling of 15 mm thick mineral fibre board, in tile form of size 600mm x 600mm, along with galvanised light gauge rolled form supporting system in double web construction pre painted with steel capping, of approved shade and colour, to give grid of maximum size of 1200x600. as per manufacturers details including supporting grid system, expansion fasteners for suspension arrangement from RCC, providing openings for AC ducts, return air grills, light fixtures, etc., all complete.			
9.12.03	False ceiling of 12 mm thk calcium silicate board of 'HILUX' or equivalent with suspension system as per manufacturers details including supporting grid system, expansion fasteners for suspension arrangement from RCC, providing openings for AC ducts, return air grills, light fixtures, etc., all complete. (With concealed grid and finished flat seamless).			
9.12.04	GI Clip in Metal Ceiling System of 600x600 mm module which includes providing and fixing 'C' wall angle of size 20x30x20mm made of 0.5mm thick pre painted steel along the perimeter of the room with help of nylon sleeves and wooden screws at 300mm center to centre, suspending the main C carrier of size 10x38x10mm made of G.I steel 0.7 mm thick from the soffit with help of soffit cleat 37x27x25x1.6 mm, rawl plugs of size 38x12 mm and C carrier suspension clip and main carrier bracket at 1000mm c/c. Inverted triangle shaped Spring Tee having height of 24 mm and width of 34mm made of GI steel 0.45 mm thick is then fixed to the main C carrier and in direction perpendicular to it at 600mm centers with help of suspension brackets. Wherever the main C carrier and spring T have to join, C carrier and spring T connectors have to be used. All sections to be galvanized @ 120 gms/sqm (both side inclusive) Fixing with clip in tiles into spring 'T' with GI Metal Ceiling Clip in plain Beveled edge global white color tiles of size 600x600 and 0.5mm thick with 25mm height, made of G I sheet having galvanizing of 100 gms/sqm (both sides inclusive) and 20% perforation area with 1.8mm dia holes and having NRC of 0.5, electro statically polyester powder coated of thickness 60 microns (minimum), including factory painted after bending and perforation and backed with a black Glass fiber acoustical fleece			
9.12.05	Pre-Painted Coil coated Steel false ceiling system, at all level, for all kind of works, consisting of 0.5 mm thick galvanised as per IS : 277, along with galvanised supporting steel members exposed faces of galvanised member to be prepainted with regular modified polyester coating / super polyester coating minimum 20 DFT, to form panels of specified size for tile type panels and roll formed stove enamelled 0.6 mm thick steel carrier, for fixing of lineal type panels by clip on arrangement, suspended from RCC slab / structural steel or catwalk way steel channel grid above with 4 mm (minimum) galvanised wires (rods), with special height adjustment clips, providing angle section of minimum 25 mm leg width along the perimeter of ceiling, including all labour, material, supporting grid system (members minimum 0.8 mm thick and galvanised as per IS : 277) anchor fasteners for making suspension arrangement from RCC, providing openings for AC ducts, return air grills, insulation light fixtures, etc., all complete.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 159 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS	एनटीपीसी NTPC		
9.12.06	Tile type steel false ceiling system in square pattern panels of 600 mm x 600 mm size along with galvanised light gauge rolled form. supporting system in double web 'T' construction with pre-painted steel, with Tee support.			
9.12.07	Lineal pattern (closed type) of 100 mm nominal width, with carrier support. Metal ceiling as above in lineal/tile shape in stainless steel, bright finish instead of pre-painted coil coated finish.			
9.12.08	Mineral wool insulation shall be laid on top of false ceiling panels. Additional hangers and height adjustment clips shall be provided for return air grills, light fixtures, A.C. ducts etc.			
9.12.09	Suitable M.S. channel (Minimum MC75 with maximum spacing of 1.2 m C/C both ways) grid shall be provided above the false ceiling level for movement of personnel and to facilitate maintenance of lighting fixtures, AC ducts etc.			
9.12.10	Underdeck insulation shall be provided on the ceiling (underside of roof slab) and underside of floor slab of air-conditioned area depending upon the functional requirements. This underdeck insulation shall consist of 50mm thk. mineral wool insulation with 0.05 mm thick aluminium foil & 0.6 mm x 25mm mesh wire netting and shall be fixed to the ceiling with 2 mm wire ties.			
9.12.11	Suitable cut-outs shall be provided in false ceiling to facilitate fixing of lighting fixtures, AC grills, smoke detectors, etc.			
9.13.00	Interior Design A comprehensive interior design scheme shall be conceived with the intention of projecting a definite theme and aesthetic appearance to inside working environment. It shall take into account the multidisciplinary engineering activities involving power plant technology, and architectural & civil engineering for a smooth control hierarchy and man machine interface. All the design aspects such as flooring, false ceiling, furniture, colour scheme equipment design & layout, illumination, fire fighting, acoustics and ergonomics requirements shall be detailed out so as to present an overall unified aesthetic spatial appearance. The areas to be undertaken for this interior design process shall be control room complex including common control room, computer room, conference rooms and office areas in the main plant building and the following aspects shall be reviewed and evaluated for design. Furniture to be supplied by Bidder for the control room complex shall be as specified under C&I specification. a) Layout, keeping in view the man-machine interface and suitable ergonomic practices. b) Integration of civil engineering with architecture and interior design. c) Illumination levels, noise levels, electromagnetic interference levels, taking into account the equipment and furniture. d) Comfort and safety requirements such as air conditioning, fire fighting, fire escapes, etc. e) Microprocessors based control system to control the functional requirements. The above design philosophy put into practice shall be detailed out through presentation drawings, perspective views, scale models, detail drawings, etc.			
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 160 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
9.14.00	Finishing Schedule Interior and Exterior Finishes shall be as given in Tables-B & C respectively attached at the end of these specification.		
NORTH KARANPURA STPP (2X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 161 OF 234

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE – A
PROPOSED ACID /ALKALI RESISTANT TREATMENT

S.NO.	AREA	PRIMER (ONE COAT)	TYPE OF LINING AND THICKNESS				EPOXY COATING (TWO COATS)
	EFFLUENT TREATMENT PLANT		A.R. BRICKS	A.R. TILES	EPOXY MORTAR	BITUMASTIC	
1	<u>CPU:</u> a) Neutralization Pit i) Floors	Bitumen	75 mm thick			18 mm thick	
	ii) Walls	Bitumen	115 mm thick			18 mm thick	
	iii) Ceiling	Epoxy					150 micron
	iv) Pilasters		115 mm thick				
	b) Effluent Drains	Bitumen	38 mm thick				
	c) Floor around equipment & dado	Bitumen	38 mm thick			12 mm thick	
	d) Regeneration area floor & dado	Bitumen	38 mm thick			12 mm thick	

CLAUSE NO.

TECHNICAL REQUIREMENTS



	e) Acid / Alkali storage area	Bitumen	38 mm thick			12 mm thick	
	f) Degasser area floor	Bitumen	38 mm thick			12 mm thick	
	g) Pedestals for supporting equipment	Bitumen	38 mm thick			12 mm thick	
	h) M.S. Grating / Chequered plate	Epoxy					150 micron

Note : -

1. The above table is for general guidance only, however, actual areas/ facilities to be covered shall be as per Scope of work.
2. Suitable end sealing shall be provided.
3. Structures shall be tested for waterproofing before application of Acid / Alkali Resistant Treatment.
4. This treatment shall be applied on dry surface.
5. For laying of AR bricks / tiles, the bedding mortar shall be of potassium silicate 6 mm thickness and the pointing mortar shall be of Epoxy / furane 20 mm deep and 6 mm thickness.

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
1.	Main power house Building.			
	a)Unloading Bay	Cement concrete with Metallic hardener topping	Acrylic distemper	--
	b)Cable vault	Cement concrete with Metallic hardener topping	Acrylic distemper	Acrylic distemper
	c)Balance area including passage	- do –	- do –	-do-
	d)SWAS Room	Vitrified ceramic tiles.	Acrylic emulsion paint.	Mineral fiber board false ceiling.
	e)Equipment Area, ESP SWGR/ ACP Room/ UAF Room	Cement concrete with Metallic hardener topping	Acrylic distemper.	Acrylic distemper
	f) UPS Battery charger room	Vitrified ceramic tiles.	Acrylic emulsion paint.	G.I Metal panel false ceiling in approved pattern.
	g) Deaerator floor	Cement concrete with Metallic hardener topping.		Metal deck roofing (bottom of sheeting with RAL 9002 finish)
	h) Operating Floor	20 mm thick Granite stone (polished & shot blasted in ratio of 80:20).	Colour coated Metal cladding on A-Row& Gable end, up to crane girder level.	- do –

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	General circulation and movement areas	20mm thk. Polished granite stone / marble stone/ Vitrified Ceramic tiles.		Acrylic distemper (except metal deck area).
	i) Switchgear room	Cement concrete with Metallic hardener topping	Acrylic distemper	Acrylic distemper
	j) MCC Room	- do -	- do -	- do -
	k) Control room area including control room, computer room,	Vitrified ceramic tiles	Partition in Fire rated glass & Aluminium composite panel cladding for columns	G.I Metal panel false ceiling
	l) control equipment room,	Vitrified ceramic tiles	vitrified ceramic tiles for wall cladding& Aluminium composite panel cladding for columns	G.I Metal panel false ceiling
	m) Conference room, senior executive room.	Laminated wooden flooring	Glazed partition with anodized Aluminium frame/ Acrylic emulsion paint.	G.I Metal panel false ceiling
	n) Record room	Heavy duty dust pressed ceramic tiles	Acrylic distemper.	- do –

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	o) Locker room	Heavy duty dust pressed Ceramic Tiles	Acrylic distemper.	Acrylic distemper
	p) Toilet area	Heavy Duty Dust pressed ceramic tiles and 18mm thick. Polished granite in one piece for wash basin platform.	Designer ceramic wall tiles upto 2.1m ht. and Acrylic distemper for balance height.	Calcium Silicate false ceiling.
	q) Office Room, Staff Room/Library	Vitrified ceramic tiles.	Acrylic emulsion paint.	Mineral fiber board false ceiling..
	r) Laboratory area	Heavy duty dust pressed ceramic tiles.	Designer ceramic wall tiles up to 1.2m ht.& rest Acrylic distemper/chemical resistant paint.	Gypsum board false ceiling as/profile or chemical resistant paint.
	s) RCC Stair case	20mm thick Marble stone	Vitrified Ceramic Tiles upto 1.2m. ht. & Resin bonded granular texture finish for balance height.	Acrylic Distemper
	t) Lift areas.	20mm thick polished marble stone/ granite stone as/ pattern.	Acrylic emulsion paint or 18mm thick polished marble/ granite cladding.	Metal panel false ceiling
	u) Passages and general circulation areas.	20mm thick polished Marble Stone/ granite stone.	Acrylic Distemper / acrylic emulsion paint.	- do- & Acrylic emulsion paint.

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	v) Battery Room	Acid and alkali resistant tile.	Acid and alkali resistant epoxy coating up to 1.2m height and chemical resistant paint for balance height	Chemical Resistant paint.
	w) Oil canal, oil room, oil purification Tank and other areas where oil spillage is likely to occur.	Oil resistant paint (epoxy based) 150 micron over primer.	As above except oil canal Oil resistant Paint	As above except oil canal.
	x) Pathways including roof area.	22mm thick concrete chequered tiles.	-	-
2.	Service Building/ Admin Building/Auditorium Building			
	a) Entrance Lobbies and Lift areas/Foyer/Exhibition space/Canteen.	20mm thick polished marble stone/ granite stone as/ pattern.	Textured paint/ acrylic emulsion paint or 18mm thick polished marble/ granite cladding.	Mineral Fiber Board False Ceiling.
	b) Conference room, senior executive room.	Laminated wooden flooring	Glazed partition with Aluminium frame/ Acrylic emulsion paint.	Mineral fiber board false ceiling.
	c) Office Room, Staff Room/Library.	Vitrified ceramic tiles.	Acrylic emulsion paint.	Gypsum Board False Ceiling as/profile
	d) Passage	Vitrified ceramic tiles.	Textured paint/ acrylic emulsion paint.	Mineral fiber board false ceiling.

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	e) RCC Stair case	Marble stone / granite stone.	Marble stone/ granite stone up to 1.2m.ht. & Textured paint above.	Acrylic Distemper.
	f) Toilet/ Pantry/ Kitchen	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform..	Designer ceramic wall tiles dado upto 2.1 m. height and Acrylic distemper for balance area height. .	Calcium Silicate false ceiling.
	g) AHU/ A.C. Plant room/MCC Room/Store	Cement concrete with Metallic hardener topping.	Acrylic distemper / Wall Insulation in AHU	Acrylic distemper
	h) Covered parking area	Pavers interlocking cement concrete blocks.	External finish	Acrylic Distemper
	i) Pathways including roof area.	22mm thick concrete chequered tiles.		
	j) Green Room	Vitrified ceramic tiles.	Acrylic emulsion paint .	Gypsum Board False Ceiling
	k) Seating Area	Cement concrete with Metallic hardener topping covered with carpet tiles/ wooden flooring	Wall paneling.	Gypsum Board False Ceiling /Mineral fiber board false ceiling as per acoustic requirement.
	l) Stage	Cement concrete with Wooden flooring	Wooden paneling per acoustic requirement.	-do-

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	m) Projector room	Dust pressed ceramic tile	Acrylic Distemper	Acrylic Distemper
3	ESP control building/Air compressor house/ARCW. building			
	a) Operating/Maintenance areas	Cement concrete with Metallic hardener topping	Pre color coated metal panel cladding.	Acrylic distemper (except metal deck area)
	b) Office Room, Staff Room	Vitrified ceramic tiles.	Acrylic emulsion paint	Acrylic emulsion paint
	c) Control Room	Vitrified ceramic tiles.	Vitrified tile cladding on walls up to false ceiling & column encased with ACP.	False ceiling in lineal Metal panel
	d) MCC Room	Cement concrete with Metallic hardener topping	Acrylic distemper	Acrylic distemper (except metal deck area)
	e) RCC Stair case	Marble stone / granite stone.	Vitrified tile up to 1.2m.ht. & Acrylic Distemper	Acrylic Distemper
	f) Battery Room	Acid, Alkali resistant tile	Acid, Alkali resistant tile	Acrylic Distemper
	g) AHU/ AC Plant room/ Cable vault	Cement concrete with Metallic hardener topping	Acrylic Distemper	Acrylic Distemper

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	h) Toilets	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform.	Designer ceramic wall tiles up to 2.1m / ceiling ht. and Acrylic distemper for balance height.	Acrylic distemper/ Calcium silicate false ceiling.
4.	Canteen/ Gate Complex/Fire station/ Construction Office			
	a) Reception/Waiting	Marble stone / Granite stone	Textured paint/ acrylic emulsion paint	Acrylic Distemper
	b) Office/Guard Room/Conference/Viewing Gallery/ Staff room	Vitrified ceramic tiles.	Acrylic distemper/ acrylic emulsion paint	Acrylic Distemper/Mineral fiber board false ceiling./ Metal False Ceiling
	c) Detention Room/ Ammunition store	Cement concrete with Metallic hardener topping	Acrylic distemper	Acrylic Distemper
	d) Sitting and General Area	Granite stone/Vitrified ceramic tiles.	Designer ceramic wall tiles up to 1.2 m, and Textured Paint for balance height. Glass mosaic tiles for murals & Glass blocks for interior purpose.	Acrylic distemper/ Gypsum board false ceiling./ Aluminium False ceiling
	e) Kitchen, Pantry and preparation area	Heavy duty dust pressed ceramic tiles and Granite stone for platform	Designer ceramic wall tiles dado upto 2.1 m. height and Acrylic distemper for balance area height. .	Acrylic distemper

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	f) Toilets	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform.	Designer ceramic wall tiles.	Calcium Silicate false ceiling.
	g) Fire Tender area	Cement concrete with Metallic hardener topping.	Acrylic distemper.	Acrylic distemper.
	h) Stores	Cement concrete with Metallic hardener topping.	Acrylic distemper.	Acrylic distemper.
5.	CHP Maintenance Building /Permanent store/Workshop building			
	a) Workshop/stores	Cement concrete with Metallic hardener topping.	Acrylic distemper/ color coated Metal panel cladding	Acrylic distemper (except metal deck area)
	b) Office Room, Staff Room	Vitrified ceramic tiles.	Acrylic emulsion paint.	Mineral fiber board false ceiling/ Acrylic distemper
	c) Passages	Vitrified Ceramic Tiles	Acrylic distemper	Mineral fiber board false ceiling/ Acrylic distemper
	d) RCC Stair case	18mm thick polished Marble stone / granite stone.	Vitrified Ceramic Tiles 1.2m.ht. & Distemper above.	Acrylic Distemper

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	e) Toilets	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform.	Designer ceramic wall tiles dado upto 2.1 m. height and Acrylic distemper for balance area height. .	Acrylic distemper
6.	Mill& Bunker building/Track Hooper/T.P./Conveyer's gallery/Crusher			
	a) Mill& Bunker area/Track Hooper area/ T.P. area/Conveyer's gallery area/Crusher area	Cement concrete with Metallic hardener topping	Acrylic distemper on masonry walls/ color coated Metal panel cladding	color coated Metal panel cladding
	a) Toilets	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform.	Designer ceramic wall tiles up to 2.1m / ceiling ht. and Acrylic distemper for balance height.	Acrylic distemper
7.	Fire water pump house			
	a) Maintenance /Pump floor/PLC	Cement concrete with Metallic hardener topping	Acrylic distemper	Acrylic distemper (except metal deck area)
	b) Control room /PLC.	Epoxy flooring	Acrylic emulsion paint .	Mineral fiber board false ceiling.
	c) Toilet area	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform.	Designer ceramic wall tiles up to 2.1m / ceiling ht. and Acrylic distemper for balance height.	Acrylic distemper

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
8.	Fire water booster water pump house /Foam pump house.			
	a) Maintenance /Pump floor/PLC	Cement concrete with Metallic hardener topping	Acrylic distemper	Acrylic distemper (except metal deck area)
	b) Control room /PLC.	Vitrified Ceramic Tiles	Acrylic emulsion paint .	Mineral fiber board false ceiling.
	c) Toilet area	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform.	Designer ceramic wall tiles up to 2.1m / ceiling ht. and Acrylic distemper for balance height.	Acrylic distemper
9.	Ash slurry pump house/ Ash water pump house / Silo Area Utility Building / Ash Water recirculation Pump House/ Transport air compressor house/ HCSD pump house/ Ash Dyke Maintenance building.			
	a) Operating/Maintenance areas/ MCC room	Cement concrete with Metallic hardener topping	Acrylic distemper	Acrylic distemper (except metal deck area)
	b) Office Room, Staff Room	Vitrified ceramic tiles.	Acrylic emulsion paint	Acrylic distemper.
	c) Control room	Vitrified Ceramic Tiles	Acrylic emulsion paint	Mineral fiber board false ceiling.

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –B

INTERIOR FINISHING SCHEDULE

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	d) RCC Stair case	Marble stone / Granite stone.	Marble stone / Granite stone up to 1.2m.ht. & Acrylic emulsion paint	Acrylic Distemper.
	e) Toilet area	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform.	Designer ceramic wall tiles up to 2.1m / ceiling ht. and Acrylic distemper over plaster of Paris for balance height.	Acrylic distemper.
10.	CWPH / DMPT buildings / & Other auxiliary building.			
	a) Workshop/ Operating/Maintenance areas/MCC areas	Cement concrete with Metallic hardener topping	Acrylic distemper	Acrylic distemper (except metal deck area)
	b) Office Room, Staff Room	Vitrified ceramic tiles.	Acrylic emulsion paint	Acrylic emulsion paint
	c) Control room	Vitrified Ceramic Tiles	Acrylic emulsion paint	Mineral fiber board false ceiling
	d) Acid/Alkali storage area/ CW treatment area/DM plant area/ Regeneration area/ Neutralization pit etc.	Acid, Alkali resistant tile as per requirement.	Acid/Alkali resistant tile as per requirement.	Acrylic Distemper

CLAUSE NO.

TECHNICAL REQUIREMENTS**TABLE –B****INTERIOR FINISHING SCHEDULE**

S.NO.	DESCRIPTION OF AREA	FLOORING	WALLING	CEILING
	e) RCC Stair case	Marble stone / granite stone.	Marble stone up to 1.2 m.ht. & Acrylic Distemper paint	Acrylic Distemper
	f) Toilet area	Heavy Duty Dust pressed ceramic tiles and Granite stone in one piece for wash basin platform.	Designer ceramic wall tiles upto 2.1m / ceiling ht. and Acrylic distemper for balance height.	Calcium Silicate false ceiling.

- Note :
1. All wall and roof areas above false ceiling shall be plastered and white washed.
 2. The colour and pattern of finish shall be as per approved details.
 3. All materials shall be of reputed and established brand approved by Engineer-in-charge.
 4. Wherever alternative materials are specified, the final selection rests with Engineer-in-charge.
 5. This finishing schedule shall also be applicable to similar functional areas for all other buildings and facilities.
 6. All the finishing materials shall be applied / provided as per manufacturer specification and guidelines under the supervision & guidelines of manufacturer.
 7. Requirement given above are suggestive and minimum. Bidder is welcome to suggest alternative scheme conforming to design functional requirement subject to approval of the Engineer-in-charge.

CLAUSE NO.

TECHNICAL REQUIREMENTS



TABLE –C

EXTERIOR FINISHES SCHEDULE

Sl.No.	DESCRIPTION OF AREA	WALL AND PROJECTIONS	SOFFIT OF PROJECTIONS
1.	Main plant building & Fire walls in Transformer yard; Other Auxilliary building in steel framed structure.	Resin bonded granular texture finish of approved colour/colour combination over plastered surface on masonry/concrete. Approved colour/ colour combination of colour coated metal cladding	Premium Acrylic Smooth Exterior Paint over plastered surface. Approved colour/ colour combination of colour coated metal cladding.
2.	Building with concrete frame work, etc.	Premium Acrylic Smooth Exterior Paint of approved colour/colour combination. For Service building/ Admin. Bldg. / canteen & Auditorium. Aluminium composite Panel Cladding in combination with Resin bonded Granular texture finish (50:50)	Premium Acrylic Smooth Exterior Paint over plastered surface.
3.	Steel Structure, trestles, etc.	High performance Paint of approved specification and shade.	

NOTE : 1. The colour and pattern of finish shall be as finalized by Engineer.

2. All materials shall be of reputed and established brand approved by Engineer.

CLAUSE NO.	TECHNICAL REQUIREMENTS			
10.00.00	MATERIAL SPECIFICATION			
10.01.00	Cement Fly ash based portland pozzolana cement conforming to IS:1489 (Part-1) shall be used for all areas other than for the critical structures identified below. Other properties shall be as per IS code. Ordinary Portland Cement (OPC) shall necessarily be used for the following structures. a) TG foundation top deck b) Spring supported decks of all machine foundations such as PA/FD/ID Fans and TDBFP/MDBFP c) RCC for Chimney shell. d) NDCT shell and racker columns of NDCT. The grade of cement shall be Grade 43 for OPC conforming to IS:8112. In place of fly ash based portland pozzolana cement, OPC mixed with Fly Ash can be used. Batching plant shall have facility for mixing fly ash. Fly ash shall conform to IS:3812(Part I & Part II). Percentage of fly ash to be mixed in concrete shall be based on trial mix. Mix design shall be done with varying percentage of fly ash mix with cement			
10.02.00	Aggregates a) Coarse aggregate Coarse aggregate for concrete shall be crushed stones chemically inert, hard, strong, durable against weathering of limited porosity and free from deleterious materials. It shall be properly graded. It shall meet the requirements of IS: 383. b) Fine aggregate Sand shall be hard, durable, clean and free from adherent coatings of organic matter and clay balls or pellets. Sand, when used as fine aggregate in concrete shall conform to IS : 383. For plaster, it shall conform to IS : 1542 and for masonry work to IS : 2116.			
10.03.00	Reinforcement Steel Reinforcement steel shall be of high strength deformed TMT steel bars of grade Fe-500 and shall conform to IS:1786. However, minimum elongation shall be 14.5%. Mild steel & medium tensile steel bars and hard drawn steel wire shall conform to grade-1 of IS:432 (Part-1) or grade A of IS:2062. Welded wire fabric shall conform to IS:1566.			
10.04.00	Structural Steel Structural Steel (including embedded Steel) shall be straight, sound, free from twists, cracks, flaw, laminations and all other defects. Structural steel shall comprise of mild steel, medium strength steel and high tensile steel as specified below.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 177 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS				
10.04.01	Mild Steel a) Rolled sections shall be of grade designation E250, Quality BR, Semi-killed/ killed conforming to IS 2062 . All steel plates shall be of Grade designation E250, Quality BR (fully killed) , conforming to IS 2062 and shall pass the impact test value at room temperature . Plates beyond 12mm thickness and up to 40mm thickness shall be normalized rolled. Plates beyond 40mm thickness shall be vacuum degassed & furnace normalised and shall also be 100% ultrasonically tested as per ASTM –A578 level B-S2. b) Pipes shall conform to IS: 1161 (Hand rails only). c) Hollow (square and rectangular) steel sections shall be hot formed conforming to IS: 4923 and shall be of minimum Grade Yst 240. Minimum thickness of hollow sections shall be 4mm. d) Chequered plate shall conform to IS 3502 and shall be minimum 6 mm thick excluding projection. Steel for chequered plate shall conform to grade E250 Quality BR semi killed of IS: 2062 or equivalent grade conforming to ASTM & BS standards only.				
10.04.02	Medium and High Tensile Steel Rolled Sections and plates shall be of grade designation E350, Quality B0 (Fully killed) , conforming to IS 2062 . All steel plates beyond 12mm thickness and upto 40mm thickness shall be controlled rolling. Plates beyond 12mm thickness and up to 40mm thickness shall be normalized rolled. Plates beyond 40mm thickness shall be vacuum degassed & furnace normalised and shall also be 100% ultrasonically tested as per ASTM –A578 level B-S2.				
10.05.00	Bricks Bricks shall be table mounted/ machine made of uniform size, shape and sharp edges and shall have minimum compressive strength of 50kg/cm ² . Burnt clay fly ash bricks and fly ash lime bricks shall conform to IS:13757 and IS:12894 respectively. Minimum fly ash content in fly ash based bricks shall be minimum 25%. Common burnt clay bricks shall conform to IS:1077.				
10.06.00	Foundation Bolts Material and details of foundation bolts shall conform to IS:5624. Mild steel bars used for the fabrication of bolt assembly shall conform to grade 1 of IS432 and/ or grade A of IS:2062. Hexagonal nuts and lock nuts shall conform to IS 1363 & IS1364 up to M36 diameter and IS 5624 for M42 to M150 diameter.				
10.07.00	Stainless steel The material specification for stainless steel plates are mentioned in the design concept area of Mill Bunker building.				
10.08.00	Water Water used for cement concrete, mortar, plaster, grout, curing, washing of coarse aggregate, soaking of bricks, etc. shall be clean and free from oil, acids, alkalis, organic matters or other harmful substances in such amounts that may impair the strength or durability of the structure. Potable water shall generally be considered satisfactory for all masonry and concrete works, including curing. When water from the proposed source is used for making				
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS	PAGE 178 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
10.08.00	the concrete, the maximum permissible impurities, development of strength and initial setting time of concrete shall meet the requirements of IS:456.			
	All materials brought for incorporation in works shall be of best quality as per IS unless specified otherwise.			
	Statutory Requirements			
	Bidder shall comply with all the applicable statutory rules pertaining to Factories Act, Fire Safety Rules at Tariff Advisory Committee. Water Act for pollution control, Explosives Act, etc.			
	Provisions of safety, health and welfare according to Factories Act shall be complied with. These shall include provision of continuous walkways along the crane - girder level on both sides of building, comfortable approach to EOT crane cabin, railing, fire escape, locker room for workmen, pantry, toilets, rest room etc.			
11.00.00	Provisions for fire proof doors, number of staircases, fire separation wall, lath plastering/encasing the structural members (in fire prone areas), type of glazing etc. shall be made according to the recommendations of Tarrif Advisory Committee.			
	Statutory clearances and norms of State Pollution Control Board shall be followed.			
	Bidder shall obtain approval of Civil/Architectural drawings from concerned authorities before taking up the construction work.			
11.01.00	Inspection, Testing And Quality Control			
11.02.00	Sampling and testing of major items of civil works viz. earthwork, concreting, structural steel work (including welding), piling, sheeting, etc. shall be carried out in accordance with the requirements of this specification. Wherever nothing is specified relevant Indian Standards shall be followed. In absence of Indian Standard equivalent International Standards may be used.			
	The Bidder shall submit and finalise a detailed field Quality Assurance Programme before starting of the construction work according to the requirement of this specification. This shall include frequency of sampling and testing, nature/type of test, method of test, setting of a testing laboratory, arrangement of testing apparatus/equipment, deployment of qualified/experienced manpower, preparation of format for record, Field Quality Plan, etc. Tests shall be done in the field and/or at a laboratory approved by the Engineer. The Bidder shall furnish the test certificate from the manufacturer's of various materials to be used in the construction.			
12.00.00	Workmanship and dimensional shall be checked as stipulated below.			
12.00.00	ANNEXURES			
	(a) List Of Codes And Standards			
12.00.00	All applicable standards, references, specifications, codes of practice, etc., shall be the latest edition including all applicable official amendments and revisions. A complete set of all these documents shall be available at site with Bidder. List of some of the applicable Standards, in original Codes and references is as given in Annexure-a of this specification.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 179 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	Annexure-(a)			
	<u>LIST OF CODES AND STANDARDS</u>			
	Excavation and Filling			
	IS :2720	Methods of test for soils(relevant parts)		
	IS:4701	Code of practice for earth work on canals.		
	IS:9759	Guide lines for dewatering during construction.		
	IS:10379	Code of practice for field control of moisture and compaction of soils for embankment and sub-grade.		
	Properties, Storage and Handling of Common Building Materials			
	IS:269	33 grade for ordinary Portland cement.		
	IS:383	Coarse and fine aggregates from natural sources for concrete.		
	IS:432	Specification for mild steel and medium tensile steel bars and		
	(Part 1&2)	hard drawn steel wires for concrete reinforcement.		
	IS:455	Portland slag cement.		
	IS:702	Industrial bitumen.		
	IS:712	Specification for building limes.		
	IS:1077	Common burnt clay buidling bricks.		
	IS:1161	Steel tubes for structural purposes.		
	IS:1239	Mild steel tubes, tubulars and other wrought steel fillting - MS tubes.		
	IS:1363	Hexagon head bolts, screws and nuts of productions		
	(Part 1-3)	grade - C.		
	IS:1364	Hexagon head bolts, screws and nuts of productions		
	(Part 1-5)	grade-A & B.		
	IS:1367 (Part 1-18)	Technical supply condition for threaded fasteners.		
	IS:1489 (Part-I)	Portland-pozzolana cement. Fly ash based		
	IS:1542	Sand for Plaster.		
	IS:1566	Hard drawn steel wire fabric for concrete reinforcement.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS
				PAGE 180 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	IS:1786	High strength deformed steel bars & wires for concrete reinforcement.	
	IS:2062	Hot Rolled Low, Medium and High Tensile Structural Steel	
	IS:2116	Sand for masonry mortars.	
	IS : 2185 (Part 1)	Hollow & solid concrete blocks.	
	(Part 2)	Hollow & solid light weight concrete blocks.	
	IS:2386 (Part I-VIII)	Testing of aggregates for concrete.	
	IS:3812	Specification for fly ash for use as pozzolona and admixture.	
	IS:4082	Recommendation on stacking and storage of construction materiel and components at site	
	IS:8112	43 grade ordinary portland cement.	
	IS:8500	Structural steel-Microalloyed (Medium and high strength qualities).	
	IS:12269	53 grade ordinary portland cement.	
	IS:12894	Specification for fly ash lime bricks.	
	IS:13757	Burnt clay fly ash building bricks.	
	Cast in-situ Concrete and Allied Works		
	IS:280	Mild steel wire for general engineering purpose.	
	IS:456	Code of practice for plain and reinforcement concrete.	
	IS:457	Code of practice for general construction of plain and reinforced concrete for dams and other massive structures.	
	IS:516	Method of test for strength of concrete.	
	IS:1199	Methods of sampling and analysis of concrete.	
	IS:1791	General requirement for batch type concrete mixers.	
	IS:1834	Hot applied sealing compound for joints in concrete.	
	IS:1838	Preformed fillers for expansion joints in concrete pavement and structures.	
	IS:2438	Specification for roller pan mixers.	
	IS:2502	Code of practice for bending and fixing of bars for concrete reinforcement.	
	IS:2505	Concrete vibrators - immersion type.	
	IS:2506	General requirements for screed board concrete vibrators.	
	IS:2722	Specification for Portable Swing weigh batchers for concrete (single and double bucket type).	
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS
			PAGE 181 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	IS:2750	Steel scaffoldings		
	IS:2751	Recommended practice for welding of mild steel plain and deformed bars for reinforced construction.		
	IS:3150	Hexagonal wire netting for general purposes.		
	IS:3366	Specification for pan vibrators.		
	IS:3370 (Part 1-4)	Code of practice for concrete structures for the storage of liquids.		
	IS:3558	Code of practice for use of immersion vibrators for consolidating concrete.		
	IS:4014 (Part-1&2)	Code of practice for steel tubular scaffolding.		
	IS:4326	Code of practice for earth quake resistant design and construction of buildings.		
	IS:4656	Form vibrators for concrete.		
	IS:4925 IS:4990	Concrete batching and mixing plant. Plywood for concrete shuttering work.		
	IS:5256	Code of practice for sealing expansion joints in concrete lining on canals.		
	IS:5525	Recommendations for detailing of reinforcement in reinforced concrete works.		
	IS:6461	Glossary of terms relating to cement concrete.		
	IS:6494	Code of practice for water proofing of underground reservoir and swimming pools.		
	IS:6509	Code of practice for installation of joints in concrete pavements.		
	IS:7861 (Part -1&2)	Code of practice for extreme weather concreting.		
	IS:9012	Recommended practice for shotcreting.		
	IS:9103	Admixtures for concrete.		
	IS:9417	Recommendations for welding cold worked bars for reinforced concrete construction.		
	IS:10262	Recommended guidelines for concrete mix design.		
	IS:11384	Code of practice for composite construction in structural steel and concrete.		
	IS:12118	Two parts polysulphide based sealants.		
	IS:12200	Code of practice for provision of water stops at transverse construction joints in masonry and concrete dams.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 182 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	IS:13311 Non destructive testing of concrete - methods of test. (Part 1) Ultrasonic pulse velocity. (Part 2) Rebound hammer. SP-16 Design codes for reinforced concrete to IS:456-1978. SP-23 Hand book of concrete mixes. SP-24 Explanatory handbook on Indian standards code for plain and reinforced concrete. (IS : 456) SP-34 Hand book on concrete reinforcement and detailing. ACI-318 American Concrete Institute code for structural concrete. Precast Concrete Works SP:7 National Building Code - Structural Design (Part 6/Sec.7) Prefabrication and system building and mixed / composite construction. IS:10297 Code of practice for design and construction of floors and roofs using precast reinforced/prestressed concrete ribbed or cored slab units. IS:10505 Code of practice for construction of floors and roofs using pre-cast reinforced concrete waffle units. IS:15658 Pre-cast concrete block for paving. Masonry & Allied Works IS:1905 Code of practice for structural use of unreinforced masonry. IS: 2185 Part-1 Concrete Masonry Units - Specification Part 1 Hollow and Solid Concrete Blocks Part-3 Specification for concrete masonry units: Part 2 Hollow and solid light weight concrete blocks IS:2212 Code of practice for brick work. IS:2250 Code of practice for preparation and use of masonry mortars. IS:2572 Code of practice for construction of hollow concrete block masonry. SP:20 Hand book on masonry design and construction. Sheeting Works IS:277 Galvanised steel sheets (Plan & corrugated). IS:513 Cold-rolled low carbon steel sheets & strips. IS:730 Hook bolts for corrugated sheet roofing.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 183 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
	IS:801 Code of practice for use of cold formed light gauge steel structural members in general building construction. IS:2527 Code of practice for fixing rain water gutters and down pipe for roof drainage. IS:7178 Technical supply condition for tapping screw. IS:8183 Bonded mineral wool. IS:8869 Washers for corrugated sheet roofing. IS:12093 Code of practice for laying and fixing of sloped roof covering using plain and corrugated galvanised steel sheets. IS:12436 Preformed rigid Polyurethane (PUR) and isocyanurate (PIR) foams for thermal insulation. IS:12866 Plastic translucent sheets made from thermosetting polyester resin (glass fibre reinforced). IS:14246 Continuously pre-painted galvanised steel sheets and coils. BS:5950 Code of practice for design of light gauge profiled (Part-6) steel sheeting Fabrication and Erection of Structural Steel Works IS:800 Code of practice for General Construction of steel. IS:813 Scheme for symbols for welding. IS:814 Covered electrodes for manual metal arc welding of carbon & carbon manganese steel. IS:816 Code of practice for use of metal arc welding for general construction in mild steel. IS:817 Code of practice for training and testing of metal arc welders. IS:1024 Welding in bridges and substructured subject to dynamic. IS:1181 Qualifying tests for Metal Arc welders (engaged in welding structures other than pipes). IS:1182 Recommended practice for Radiographic examination of fusion welded butt joints in steel plates IS:1608 Mechanical testing of metals - tensile testing IS:1852 Rolling and Cutting Tolerances for Hot rolled steel products. IS:2016 Specification for Plain washers. IS:2595 Code of practice for Radiographic testing		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 184 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	IS:2629	Hot dip galvanising of iron and steel	
	IS:3502	Steel chequered plate.	
	IS:3613	Acceptance tests for wire flux combination for submerged arc welding.	
	IS:3658	Code of practice for liquid penetrant flaw detection.	
	IS:3664	Code of practice for ultra sonic pulse echo testing contact and immersion method	
	IS:3757	High strength structural bolts.	
	IS:4000	High strength bolts in steel structure - code of practice.	
	IS:4353	Sub merged arc welding of mild steel and low alloy steel Recommendation	
	IS:4759	Hot dip zinc coating on structural steel and other allied products.	
	IS:5334	Code of practice for magnetic particle flaw detection of welds.	
	IS:5369	General requirements for plain washers and lock washer	
	IS : 6623	High strength structural nuts.	
	IS:6649	Hardened and tampered washers for high strength structural bolts & nuts.	
	IS:6911	Stainless steel plate, sheet and strip.	
	IS:7205	Safety code for erection of structural steel.	
	IS:7215	Tolerances for fabrication of structural steel.	
	IS:7307	Approved test for welding procedures	
	(Part - I)	Fusion welding of steel.	
	IS:7310 (Part-I)	Approval test for welders working to approval welding procedure. Fusion welding of steel	
	IS:9178 (Part-1 to 3)	Criteria for design of steel bins for storage of bulk material.	
	IS:9595	Recommendations for metal arc welding of carbon & carbon manganese steel.	
	IS:12843	Tolerances for erection of steel structures.	
	SP:6 (Part 1 to 7)	ISI Hand book for structural Engineers.	
	Plastering and Allied Works		
	IS:1661	Code of practice for application of cement and cement lime plaster finishes.	
	IS:2402	Code of practice for external rendered finishes.	
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS
			PAGE 185 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	IS:2547 (Parts 1&2) Gypsum building plaster.			
	Acid and Alkali Resistant Lining			
	IS:158 Ready mixed paint, brushing, bituminous, black, lead free, acid, alkali & heat resisting.			
	IS:412 Expanded metal steel sheets for general purpose.			
	IS:4441 Code of practice for use of silica type chemical resistant mortars.			
	IS:4443 Code of practice for use of resin type chemical resistant mortars.			
	IS:4456 (Part I & II) Method of Test for chemical resistant tiles.			
	IS:4457 Ceramic unglazed vitreous acid resisting tiles.			
	IS:4832 Specification for chemical resistant mortars.			
	(Part - 1) Silicate type			
	(Part - 2) Resin type			
	(Part - 3) Sulfur type			
	IS:4860 Acid resistant bricks.			
	IS:9510 Bitumastic acid resisting grade.			
	Water Supply, Drainage and Sanitation			
	IS:458 Precast concrete pipes (with & without reinforcement).			
	IS:554 Pipe threads where pressure tight joints are made on the threads – dimensions, tolerances and designation.			
	IS:651 Salt glazed stoneware pipes and fittings.			
	IS:774 Flushing cisterns for water closets and urinals.			
	IS:775 Cast iron brackets and supports for wash basins and sinks.			
	IS:778 Copper alloy gate, globe and check valves for water works purposes.			
	IS:781 Cast copper alloy screw down bib taps & stop valves for water services.			
	IS:782 Caulking lead.			
	IS:783 Code of practice for laying of concrete pipes.			
	IS:1172 Code of basic requirements of water supply, drainage and sanitation.			
	IS:1230 Cast iron rain water pipes and fittings.			
	IS:1239 (Part 1&2) Mild Steel tubes, tubulars and other wrought steel fittings			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 186 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	IS:1536	Centrifugally cast (Spun) iron pressure pipes for water.		
	IS:1537	Vertically cast iron pressure pipes for water, gas and sewage.		
	IS:1538	Cast iron fittings for pressure pipe for water, gas and sewage.		
	IS:1703	Copper alloy float valve for water supply fitting.		
	IS:1726	Cast iron manhole covers and frames.		
	IS:1729	Cast iron / Ductile iron drainage pipes and pipe/fittings for over ground non pressure pipeline socket and spigot series.		
	IS:1742	Code of practice for building drainage.		
	IS:2064	Selection, installation and maintenance of sanitary appliances.		
	IS:2065	Code of practice for water supply in buildings.		
	IS:2326	Automatic flushing cisterns for urinals.		
	IS:2548	Plastic seats and covers for water closets.		
	IS:2556	Vitreous sanitary appliances (vitreous china).		
	IS:3114	Code of practice for laying of cast iron pipes.		
	IS:3311	Waste plug and its accessories for sinks and wash basins.		
	IS:3438	Silvered glass mirrors for general purposes.		
	IS:3486	Cast iron spigot and socket drain pipes.		
	IS:3589	steel pipe for water and sewage (168.3 to 2540mm outside diameter)		
	IS:3989	Centrifugally cast (Spun) iron spigot and socket soil, waste and ventilating pipes, fittings and accessories.		
	IS:4111 (Part 1 to 5)	Code of practice for ancillary structure in sewerage system.		
	IS:4127	Code of practice for laying of glazed stone ware pipes.		
	IS : 4733	Methods of sampling and testing sewage effluents.		
	IS:4764	Tolerance limits for sewage effluents discharged into inland surface waters.		
	IS:1068	Electroplated coating of nickel plus chromium and copper plus nickel plus chromium.		
	IS:5329	Code of practice for sanitary pipe work above ground for buildings.		
	IS:5382	Rubber sealing rings for gas mains, water mains and sewers.		
	IS:5822	Code of practice for laying of electrically welded steel pipes for water supply.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 187 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS		एनटीपीसी NTPC	
	IS:5961	Specification for cast iron grating for drainage purpose.		
	IS:7740	Code of practice for construction and maintenance of road gullies.		
	IS:8931	Copper alloy fancy single taps combination tap assembly and stop valves for water services.		
	IS:9762	Polyethylene floats for float valves.		
	IS:10592	Industrial emergency showers, eye and face fountains and combination units.		
	IS:12592	Specification for precast concrete manhole covers and frames.		
	IS:12701	Rotational moulded polyethylene water storage tanks.		
	IS:13983	Stainless steel sinks for domestic purposes.		
	SP:35	Hand book on water supply and drainage with special emphasis on plumbing.		
	CPH&EEO	Manual on sewage and sewage treatment		
	Publication	- as updated.		
	Doors Windows and Allied Works			
	IS:204	Tower Bolts.		
	(Part 1)	Ferrous metals		
	(Part 2)	Non - ferrous metals		
	IS:208	Door Handles.		
	IS:281	Mild steel sliding door bolts for use with padlocks.		
	IS:362	Parliament Hinges.		
	IS:419	Putty, for use on window frames.		
	IS:451	Technical supply conditions for wood screws		
	IS:733	Wrought aluminium and aluminium alloy bars, rods and sections for general engineering purposes.		
	IS:1003 (Part I)	Timber panelled and glazed shutters (doors shutters).		
	IS:1003	Timber panelled and glazed shutters		
	(Part-1)	door shutters.		
	IS:1038	Steel doors, windows and ventilators.		
	IS:1081	Code of practice for fixing and glazing of metal (steel and aluminium) doors, windows and ventilators.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 188 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	IS:1285	Wrought aluminium and aluminium alloy extruded round tube & hollow section (for general engineering purposes).		
	IS:1341	Steel butt hinges.		
	IS:1361	Steel windows for Industrial buildings.		
	IS:1823	Floor door stoppers.		
	IS:1868	Anodic coatings on Aluminium and its alloys.		
	IS:2202	Wooden flush door shutters (solid core type) particle		
	(Part-2)	board face panels and hard board face panels.		
	IS:2209	Mortice locks (vertical type)		
	IS:2553	Safety glass.		
	(Part-1)	General purposes		
	IS:2835	Flat transparent sheet glass.		
	IS:3548	Code of practice for glazing in buildings.		
	IS:3564	Door closers (Hydraulically regulated)		
	IS:3614	Specification for fire check doors :		
	(Part-1)	plate, metal covered and rolling type.		
	(Part-2)	Resistance test and performance criteria.		
	IS:4351	Specification for steel door frames.		
	IS:5187	Flush bolts.		
	IS:5437	Figured, rolled and wired glass.		
	IS:6248	Specification for metal rolling shutters and rolling grills.		
	IS:6315	Specification for floor springs (Hydraulically regulated) for heavy doors.		
	IS:7196	Hold fast.		
	IS:7452	Hot rolled steel sections for doors, windows and ventilators.		
	IS:10019	Mild steel stays and fasteners.		
	IS:10451	Steel sliding shutters (top hung type)		
	IS:12823	Prelaminated particle boards.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2		SUB-SECTION-D-01 CIVIL WORKS
				PAGE 189 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	Roof Water Proofing and Allied Works			
	IS:3067	code of practice for general design details and preparatory work for damp proofing and water proofing of buildings.		
	ASTM	Standard specification for high solid content cold		
	C836-89a	liquid applied elastomeric water proofing membrane for use with separate wearing course.		
	ASTM	Standard guide for high solid content cold		
	C898-89	liquid applied elastomeric water proofing membrane for use with separate wearing course.		
	Floor Finishes and Allied Works			
	IS:5318	Code of practice for laying of flexible PVC sheet and tile flooring.		
	IS:8042	White portland cement.		
	IS:13755	Dust pressed ceramic tiles with water absorption of 3%, E 6% (Group B11a).		
	IS:13801	Chequered cement concrete tiles.		
	Painting and Allied Works			
	IS:162	Ready mixed paint, brushing fire resisting, silicate type for use on wood, colour as required.		
	IS:428	Distemper, oil, emulsion, colour as required.		
	IS:1477	Code of practice for painting of terrous metals in buildings.		
	(Part -1)	Pretreatment.		
	(Part -2)	Painting.		
	IS:1650	Specification for colours for building and decorative materials.		
	IS:2074	Ready mixed paint, air drying, red oxide-zinc chrome, priming.		
	IS:2338	Code of practice for finishing of wood and wood based materials.		
	(Part -1)	Operations and Workmanship.		
	(Part -2)	Schedule.		
	IS:2395	Code of pratice for painting concrete, masonry and plaster surfaces.		
	(Part-1)	Operations and Workmanship.		
	(Part -2)	Schedule.		
	IS:2524	Code of practice for painting of nonferrous metals in buildings.		
(Part -1)	Pretreatment			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 190 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	(Part -2)	Painting.		
	IS:2932	Enamel, synthetic, exterior, (a) under coating and (b) finishing.		
	IS:2933	Enamel exterior, (a) under coating, (b) finishing.		
	IS:4759	Hot dip zinc coatings on structural steel and other allied products.		
	IS:5410	Specification for cement paint.		
	IS:15489	Plastic emulsion paint.		
	IS:6278	Code of practice for white washing and Colour washing.		
	IS:10403	Glossary of term related to building finish.		
	IS:12027	Silicone based water repellent		
	IS:13238	Epoxy based zinc phosphate primer (2 pack)		
	IS:13239	Epoxy surfacer (2 pack)		
	IS:13467	Chlorinated rubber for paints		
	IS:14209	Epoxy enamel, two component glossy.		
	BS:5493	Code of practice for protective coating of iron and steel structures against corrosion.		
	ISO 12944	Paints and varnishes – Corrosion Protection of Steel Structures by protective paint systems		
	Piling and Foundation			
	IS:1080	Code of practice for design and construction of shallow foundations on soils.		
	IS:1904	Code of practice for design and construction of foundation in Soils : General Requirements.		
	IS:2314	Steel sheet piling sections.		
	IS:2911	Code of practice for design and construction of pile foundations. (Relevant Parts)		
	IS:2950	Code of practice for designs and construction of Raft foundation.		
	(Part-1)	Design		
	IS:2974 (Part-1 to 5)	Code of practice for design and construction of machine foundation.		
	IS:4091	Code of practice for design and construction foundations for transmission line towers and poles.		
	IS:6403	Code of practice for determination of Bearing capacity of Shallow foundations.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 191 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS		एनटीपीसी NTPC	
	IS:8009 (Part -1) (Part -2) IS:12070 VIN:2056 VDI:2060 DIN:2089 DIN:2096 DIN:4024	Code of practice for calculation of settlement of foundation. Shallow foundations. Deep foundations. Code of practice for design and construction of shallow foundations on rocks. Criteria for assessing mechanical vibrations of machines. Criteria for assessing the st of balance of rotating rigid bodies. Helical compression spring made of round wire and rod : calculation and design of compression . Helical compression spring out of round wire and rod : Quality requirements for hot formed compression spring. Flexible supporting structures for machine with rotating machines.		
	Roads			
	IRC:5 (Section-1) IRC:14 IRC:15 IRC:16 IRC:19 IRC:21 (Section-III) IRC:34 IRC:36 IRC:37 IRC:56 IRC:58 IRC:73 IRC : 86 IRC:SP:13	Standard specifications and Code of practice for road bridges, General Features of Design. Recommended practice for 2cm thick bitumen and tar carpets. Standard specifications and code of practice for construction of concrete roads. Specification for priming of base course with bituminous primers. Standard specifications and Code of practice for water bound macadam. Standard specifications and Code of practice for road bridges. Cement concrete (plain and reinforced). Recommendations for road construction in water logged areas. Recommended practice for the construction of earth embankments for road works. Guidelines for the Design of flexible pavements. Recommended practice for treatment of embankment slopes for erosion control. Guidelines for the design of rigid pavements for highways. Geometric Design standards for rural (non-urban) highways. Geometric Design standards for urban roads in plains. Guidelines for the design of small bridges & culverts.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 192 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	IRC - Publication	Ministry of Surface Transport (Road wing), specifications for road and bridge works.	
	IS:73	Paving bitumen.	
	Loading		
	IS:875	Code of practice for design loads (other than earthquake) for (Relevant parts) buildings and structures.	
	IS:1893	Criteria for earthquake resistant design of structures.	
	IS:4091	Code of practice for design and construction of foundation for transmission line towers and poles.	
	IRC:6 (Section-II)	Standard specifications & Code of practice for road bridges. loads and stresses	
	Safety		
	IS:1641	Code of practice for fire safety of buildings - General principles of fire grading and classification.	
	IS:1642	Code of practice for fire safety of buildings - Details of construction.	
	IS:3696 (Part-1&2)	Safety code for scaffolds and ladders.	
	IS:3764	Excavation work - code of safety.	
	IS:4081	Safety code for blasting and related drilling operations.	
	IS:4130	Demolition of buildings - code of safety.	
	IS:5121	Safety code for piling and other deep foundations.	
	IS:5916	Safety code for construction involving use of hot bituminous materials.	
	IS:7205	Safety code for erection of structural steel work.	
	IS:7293	Safety code for working with construction machinery.	
	IS:7969 Indian Explosives Act 1940)	Safety code for handling and storage of building materials. (As updated)	
	Architectural Design of Buildings		
	SP:7	National Building Code of India	
	SP:41	Hand book on functional requirements of buildings (other than industrial buildings)	
	ECBC	Energy Conservation Building Code	
	GRIHA	Green Rating For Integrated Habitat Assessment.	
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS
			PAGE 193 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			एनटीपीसी NTPC
	Chimney			
	IS:4998	Criteria for design of reinforced chimneys		
	IS:6533	Code of practice for design and construction of steel chimneys		
	ICAO	International Civil Aviation Organisation (ICAO)		
	DGCA	Instruction of Director General of Civil Aviation , India		
	ACI:307	Specification for the design and construction of reinforced concrete chimneys		
	BS:4076	Specification for steel chimneys		
	CICIND	Model Code for concrete chimneys Model code for steel chimneys		
	ASCE Code	Design and construction of steel chimney liners prepared by Task committee on steel chimney liners. Fossil power committee, Power division published by ASCE - 1975.		
	IS:1554	PVC insulated (heavy duty) electric cables		
	IS:2606	Alloy lead anodes for chromium plating		
	IS:3043	Code of Practice for Earthing		
	IS:9537	Conduits for electrical installations. The Indian Electricity Rules The Indian Electricity Act The Indian Electricity (Supply) Act The Indian Factories Act		
	IS:2309	Practice for protection of buildings and allied structures against lightning		
	Miscellaneous			
	IS:802 (Relevant parts)	Code of practice for use of structural steel in overhead trans- mission line towers.		
	IS:803	Code of practice for design, fabrication and erection of vertical mild steel cylindrically welded in storage tanks.		
	IS:10430	Criteria for design of lined canals and guidance for selection of type of lining.		
	IS:11592	Code of practice for selection and design of belt conveyors.		
	IS:12867	PVC handrails covers.		
	IS 11504	Criteria for structural design of reinforced concrete natural draught cooling towers		
	BS:4485 (IV)	British Standard : Code of design for water cooling towers		
	CIRIA Publication IS 4671	Design and construction of buried thin-wall pipes. Expanded polystyrene for thermal insulation purposes.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 194 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	ANNEXURE (b)			
	CONSTRUCTION METHODOLOGY			
	Construction and erection activities shall be fully mechanised from the start of the work. All excavation and backfilling work shall be done using excavators, loaders, dumpers, dozers, poclains, excavator mounted rock breakers, rollers, sprinklers, water tankers, etc. Manual excavation can be done only on isolated places with specific approval of engineer. For controlled rock blasting specialized agency, equipped with sensors to assess the impact of the blast on the adjoining existing structures, shall be employed. Dewatering shall be done using the combination of electrical and standby diesel pumps. Pile installation equipment suitable for flushing with air lift technique shall be used for construction of bored piles. For concreting, weigh batching plants, transit mixers, concrete pumps, hoists, etc. shall be used. All fabrication and erection activities of structural steel shall be carried out using automatic submerged arc welding machines, cutting machines, gantry cranes, crawler mounted heavy cranes and other equipment like heavy plate bending machines, shearing machines, lathe, milling machines, etc. Use of derricks shall not be permitted. Special enclosures, for blast cleaning of steel structure surface preparation, shall be used. All handling of materials shall be with cranes. Heavy trailers shall be used for transportation. Mechanized modular units of scaffolding and shuttering shall be used. Grouting shall be carried out using hydaulically controlled grouting equipment. Roadwork shall be done using pavers, rollers and premix plant. All finishing items shall be installed using appropriate modern mechanical tools. Manual punching etc. shall not be permitted. Heavy duty hoists for lifting of construction materials shall be deployed. Compressors for cleaning of foundations and other surfaces shall be used. Field laboratory shall be provided with all modern equipment for survey, testing of soil, aggregates, concrete, welding, etc. For testing of steel works, ultrasonic testing machines, radiographic testing machines, dye penetration test equipment, destruction testing equipment, etc. shall be deployed. All persons working at site shall be provided with necessary safety equipment and all safety aspects shall be duly considered for each construction/ erection activity. Moreover, only the persons who are trained in the respective trade shall be employed for executing that particular work.			
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 195 OF 234

CLAUSE NO.	TECHNICAL REQUIREMENTS 		
	ANNEXURE (b) CONSTRUCTION METHODOLOGY Construction and erection activities shall be fully mechanised from the start of the work. All excavation and backfilling work shall be done using excavators, loaders, dumpers, dozers, poclains, excavator mounted rock breakers, rollers, sprinklers, water tankers, etc. Manual excavation can be done only on isolated places with specific approval of engineer. For controlled rock blasting specialized agency, equipped with sensors to assess the impact of the blast on the adjoining existing structures, shall be employed. Dewatering shall be done using the combination of electrical and standby diesel pumps. Pile installation equipment suitable for flushing with air lift technique shall be used for construction of bored piles. For concreting, weigh batching plants, transit mixers, concrete pumps, hoists, etc. shall be used. All fabrication and erection activities of structural steel shall be carried out using automatic submerged arc welding machines, cutting machines, gantry cranes, crawler mounted heavy cranes and other equipment like heavy plate bending machines, shearing machines, lathe, milling machines, etc. Use of derricks shall not be permitted. Special enclosures, for blast cleaning of steel structure surface preparation, shall be used. All handling of materials shall be with cranes. Heavy trailers shall be used for transportation. Mechanized modular units of scaffolding and shuttering shall be used. Grouting shall be carried out using hydraulically controlled grouting equipment. Roadwork shall be done using pavers, rollers and premix plant. All finishing items shall be installed using appropriate modern mechanical tools. Manual punching etc. shall not be permitted. Heavy duty hoists for lifting of construction materials shall be deployed. Compressors for cleaning of foundations and other surfaces shall be used. Field laboratory shall be provided with all modern equipment for survey, testing of soil, aggregates, concrete, welding, etc. For testing of steel works, ultrasonic testing machines, radiographic testing machines, dye penetration test equipment, destruction testing equipment, etc. shall be deployed. All persons working at site shall be provided with necessary safety equipment and all safety aspects shall be duly considered for each construction/ erection activity. Moreover, only the persons who are trained in the respective trade shall be employed for executing that particular work.		
NORTH KARANPURA STPP (3X660MW) EPC PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC.NO.:CS-4410-001-2	SUB-SECTION-D-01 CIVIL WORKS	PAGE 196 OF 234

CLAUSE NO.

TECHNICAL REQUIREMENTS



ANNEXURE – (h)

Specification For High Performance Moisture Compatible Corrosion Resistant Coating System (for Concrete Surfaces of IDCT)

- a) The coating system shall be water compatible, compatible for applying in wet conditions also and shall be tolerant to under-prepared surfaces and existing residual tar / paint. The system shall also be quick curing so as to be suitable for application during shut downs.

The coating material shall be stored in the manner as per recommendations of the manufacturer until ready for use. The coating material shall be used within the manufacturer's written recommended shelf life.

- b) The coating system shall conform to the following :

PROPERTIES OF PAINT

Coating System	High Performance Moisture Compatible Corrosion Resistant Coating System
Volume Solids	70%
Specific Gravity (ASTM-D-1475)	1.25 ± 0.1
Dry Film Thickness (ASTM-D-1186)	160 ± 10 µm per coat
Coverage	4 - 4.5 sq.m/ ltr
Touch Dry	2 Hours
Recoating	24 Hours

PROPERTIES OF COATING

Salt Spray (ASTM-B 117)	2000 Hour
Resistance to sea water (Carried out up to 6 months)	Passes
Coating Resistance (Carried out upto 6 months)	10 ⁹ Ω. cm ²
Adhesion (ASTM-D 4541)	4.5 kN minimum
Flexibility (ASTM-D-522)	1/8" passes
Elongation	33%
Impact (ASTM G 14-04)	45 cm passes

TENDER NO: PSER:SCT:NKP-C1999:19

VOLUME -III

PRICE SCHEDULE-REV-00

FOR

BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF
3X660 MW NORTH KARANPURA STPP, JHARKHAND.

BHARAT HEAVY ELECTRICALS LIMITED

(A GOVT. OF INDIA UNDERTAKING)

POWER SECTOR – EASTERN REGION

PLOT NO. – 9 / 1, DJ – BLOCK,

SECTOR – II, KARUNAMOYEE,

SALT LAKE CITY,

KOLKATA – 700091.

VOLUME-III PRICE SCHEDULE, REV-00	
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.	
TENDER NO - PSER:SCT:NKP-C1999:19.	
PREAMBLE	
SL NO	DESCRIPTION
1	This preamble forms part of tender document and schedule of items. The tenderer should read this preamble carefully before filling in rates for various items. Clauses under this preamble shall be read in conjunction with various volumes of tender and other tender sections as applicable and shall have precedence over any contrary statement mentioned anywhere in this document.
2	The work shall be carried out strictly as per specifications, description of the items in these schedule and / or engineer's instructions. Drawings enclosed with the tender are only preliminary and for guidance/tender purposes giving some idea of the work involved. The work is to be executed as per terms & conditions of the tender and actual drawings/documents, which shall be furnished during execution.
3	Items of work provided in this schedule but not covered in this specification shall be executed strictly as per instruction of the engineer.
4	Unless specifically mentioned otherwise in the tender document, the tenderer shall quote for the finished items and shall provide for the complete cost towards power, fuel, tools, tackles, equipment, constructional plants, temporary works, labour, dismantling of all temporary piping, structures, valves, pumps, tanks & other misc. equipment, strengthening of roads/culverts/bridges etc. including arranging all clearances etc. required for carrying out different activities & tests, materials, levies, transport, layout, repairs, rectification, maintenance till handing over, supervisions, colonies, shops, establishments, overheads, profits and all incidental items not specifically mentioned but reasonably implied and necessary to complete the work according to the complete tender document and this schedule.
5	The quantities of the various items mentioned in this schedule of items are approximate, based on very preliminary information and may vary to any extent or be deleted altogether. The quoted rates of each item will remain firm throughout the period of execution including extension, for reasons whatsoever, as long as variation in the total value of work executed under any part of this contract including extra items, if any but excluding any price variation remains, within fifteen percent ($\pm 15\%$) of the awarded price as per LOI.
6	Prior written approval of BHEL shall be sought by the contractor in case quantity variation of any item crosses +50% (plus fifty percent) limit during execution and approval to be obtained before execution of further quantity for this item.
7	In case Sealed /Paper Price Bids are opened for finalisation of the tender, for any Item Rate/BOQ based service contract, possibility of variation of quantity/ addition/deletion of items can not be ruled out. Under such circumstances, after execution of work, if it is observed that standing as L-1 is changed based on actual quantity executed, the bidder shall give suitable rebate to maintain your standing as L-1. Since this aspect can be assessed at the end of execution, necessary adjustment will be effected at the end of execution in final bill. This condition shall not be applicable where the tender is finalised through Reverse Auction.
8	BHEL reserve the right to rationalize the rates, quoted by L-1 bidder against unit rate items and/ or other optional items with respect to item-wise lowest rates (amongst the participating bidders), before placement of order. The rates of unit rate/optional items shall remain valid till execution of the order, if the job/work is awarded to the bidder.
9	The rates quoted shall be inclusive of cleaning of site of any vegetation, dressing, clearing of old structures and leveling etc. including fixing of grid pillars, benchmarks etc. required for commencement of site activities. No separate payment will be made towards the same. However, if separate rate for such item is available in the rate schedule, the same shall be considered.
10	Rates shall be quoted in figures and in words in clear legible writing. No overwriting is allowed. All scoring and cancellations should be countersigned and in case of illegibility the interpretation of engineer shall be final. All entries shall be in English language.
11	All works item wise shall be measured upon completion and paid for at the rates quoted and accepted as per BHEL approved payment schedule/billing break-up.
12	The tenderer shall be deemed to have visited site and made himself aware of all the site conditions, studied the specifications and details of work to be done within the time schedule attached and to have acquainted himself of the conditions prevailing at site before submission of his bid/offer. No claim whatsoever due to lack of knowledge of site conditions shall be entertained after award of the work.
13	No splitting of the job is envisaged unless the same is specifically indicated in the TCC/Vol-1F. Decision of BHEL in this regard shall be final and binding to the bidders.
14	Bidders are not allowed to alter the Price Schedule format including item description, quantity etc. and the offer is liable for rejection if the bidders submit their prices in Price Schedules modified by them. BHEL reserves the right to reject the offers of bidders who submit offers in Price Formats which are modified/altered by them. Also putting any comments instead of rates/price in the designated column of the rate schedule shall make the offer liable for rejection.
15	Bidders to note that for Civil & Structural packages, against a particular item against a ST No. appearing in more than one schedule of the BOQ, same rate must be quoted in all schedules for that particular items with same descriptions. If by error, different rates are quoted in different schedules for same ST No. (i.e. item with same description), then the higher of the rates shall be considered for evaluation but awarding shall be done with the lower rate, if the bidder becomes L-1. The same modality shall be applicable for other item rate service contracts where item with same description is repeated in different schedules.
16	For Lumpsum Service Contract : The items/components indicated in the tender is indicative and may vary to any extent. No compensation shall be payable in case of any variation in the items/components listed in the bill of quantities if the executed weight remains within the variation limit. However, in case of deletion of any item or addition of new items over and above the items listed or variation of existing quantity beyond variation limit specified, adjustment (i.e. Payment or recovery as the case may be) shall be done on pro-rata basis based on the Rate per MT worked out from the quoted lump-sum Price and the total weight of components listed/indicated in price schedule plus 15% weight variation limit.
17	Engineer's decision shall be final and binding on the contractor regarding clarification of items in the schedule with respect to the other sections/volumes of the contract.
18	In case of tender for Civil and/or Structural works, if the Non-schedule items are not quoted by the bidder, it will be treated at par with rate of corresponding item of CPWD/PWD/DSR schedule as prescribed in the tender/BOQ cum Rate Schedule. PVC/escalation is not payable for these Non-scheduled items.
19	No interest, whatsoever, shall be payable by BHEL on the security deposit, any bank guarantee submitted or any amount due to successful bidder/contractor. No idling charge whatsoever (either for labour or any other resources) is payable by BHEL for any reason whatsoever.
20	Size and weights of various items are mentioned in the attached BOQ cum rate/price schedule for reference purpose only & these shall not be taken into consideration for quoting/calculating amount in the rate schedule. These shall be utilised as per relevant sections of tender. Bidders shall quote for each item in the rate column, taking unit as mentioned in the quantity column. Rates shall be filled in both figures and words. Amount shall be calculated based upon these rates multiplied by the mentioned quantity for the respective items.
21	Bidder's Total price shall be considered for evaluation unless stated otherwise.
22	In case of BOP packages, if Bidder does not quote/indicate the price for freight charges against indicated rate schedule, the same shall be considered as 2% of basic price and adjusted with the total quoted price against each item keeping the total quoted price unaltered.

VOLUME-III PRICE SCHEDULE, REV-00			
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.			
TENDER NO. PSER:SCT:NKP-C1999:19			
SCH-1 : TOTAL PRICE			
SL NO	DESCRIPTION	PRICE SCHEDULE REF	TOTAL QUOTED PRICE (IN INR)
1.0	Total price for Balance civil and architectural works etc. of BTG area for Unit #1 & 3 of 3x660 MW North Karanpura STPP, Jharkhand.	SCH 2 - BREAK UP OF TOTAL PRICE	IN FIGURES:-
			IN WORDS:-
NOTE			
1.0	Bidder shall quote total price of SCH-2- Part only at Sl No. 1 above. All other amounts / rates of each item of works in respective schedules / parts will be derived based on allocated percentages. As such, any uncalled figure/ amount noted at any other place / schedule of Volume-III will not be recknoed & will stand null & void.		
2.0	Bidder to note that total price at Sl No. 1 above shall be considered for evaluation & awarding. As such total price should be completed in all respect for the full scope defined and considering all terms and conditions.		
3.0	Bidder's quoted total price at Sl. No 1 above, respectively shall be apportioned into amount of various items of works based on allocated percentages against respective item, in respective schedules / parts (SCH-2). As such, bidder shall not indicate / quote any amount / rate in these schedules / parts and any amount / rate quoted against any item shall not be taken into cognizance / account and offer may be liable for rejection.		
4.0	Based on the itemwise percentage allocations at SCH-2, the amount for the individual items of the Bill of Quantity shall be arrived at. The rates of individual items shall be derived from the amount against each items and its quantity after rounding off to upto3 decimal places. However, RA bill payment shall be done after rounding off the gross amount to two decimal points. Any adjustment, if required, due to such methodology, will be effected / adjusted in final bill.		
5.0	Bidders to note that this is an item rate contract. Payment shall be made for the actual quantities of work executed at the unit rate arrived at as per Sl No.4 above.		
6.0	Any item as per scope of work, if not included in the price quoted above and shown separately will not be taken cognizance of and the offer shall be liable for rejection.		
7.0	Price format shall not be changed by bidder in any case and it may lead to cancellation of their offer.		

VOLUME-III PRICE SCHEDULE, REV-00				
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.				
TENDER NO. PSER:SCT:NKP-C1999:19				
SCH-2 : PRICE BREAK UP				
ST. NO	DESCRIPTION OF ITEM	UNIT	Total Qty	Weightage
100	EXCAVATION			
101	Earth work in excavation in all types of soil including ash which can be excavated by any means including setting out, levelling, dewatering (but excluding special type of dewatering viz. well point method), shoring & strutting (wherever required), dressing the sides & bottom, all lifts, ramming/compacting the excavated bottom, stacking, disposal of surplus excavated materials within a lead upto 500 m, spreading/levelling of disposed materials etc all complete for following depths below ground level.			
a	Depth from ground level but not exceeding 2 m	CUM	210.00	0.00054095
b	Depth exceeding 2 m but not exceeding 4 m	CUM	180.00	0.00058069
c	Depth exceeding 4 m but not exceeding 6 m	CUM	70.00	0.00028249
d	Depth exceeding 6 m but not exceeding 8 m	CUM	160.95	0.00081142
107	Back filling upto any depth below ground level around foundations, plinths, trenches, drains, roads etc to proper grade and level in layers not exceeding 250 mm thickness using/with selected materials from compulsorily excavated soil available within a lead upto 500m and compacted as specified including re-excavation of stacked earth, watering, ramming/compaction by manual/mechanical means, dressing etc all complete for the following.			
a	Each layer compacted so as to achieve at least 95% maximum dry density as per IS-2720 (Part-VII)	CUM	300	0.00069069
111	Supplying and filling sand upto any depth under floors, around foundations, plinths etc. in layers not exceeding 250 mm thickness and compacted so as to achieve at least 80% relative density as per IS-2720 (Part-XIV) including spreading, watering, ramming/compaction by manual / mechanical means, dressing, royalty (if any) etc. all complete.	CUM	50	0.00072602
200 CONCRETE WORKS				
Providing and placing concrete work including cost of labour, materials and equipment for handling, transportation, batching, mixing, placing, vibrating and curing, (excluding cost of centering, shuttering and reinforcement) with mechanised equipments like batching plant, transit mixer, concrete pump etc. complete as per drawing, specifications and as per direction of engineer in charge for the following. (CEMENT WILL BE SUPPLIED FREE OF COST BY BHEL AS PER TCC)				
201	Concrete of grade M7.5 (1 part cement, 4 part sand, 8 parts of 40 mm graded aggregate by volume) as filling course Lean concrete at any depth below finished floor level, under and around foundations/floors, mass fill etc.	CUM	134	0.00679311
205	Providing and laying Design Mix cement concrete conforming to IS:456 & IS 10262-2009 for reinforced concrete works with coarse sand and graded hard stone aggregate of 20mm nominal size in foundations/substructure, grade slab, paving, drains, under floors etc at any level below finished floor level, any shape, position or thickness etc complete including use of plasticizer/ superplasticizer conforming to IS:9103 (latest) to achieve required slump in concrete all complete as per specification & drawing for the following.			
b	M25 Grade	CUM	931	0.04867396
206	Providing and laying Design Mix cement concrete conforming to IS:456 & IS 10262-2009 for reinforced concrete works with coarse sand and graded hard stone aggregate of 20mm nominal size in superstructure at any level above finished floor level, any shape, position or thickness etc complete including use of plasticizer/ superplasticizer conforming to IS:9103 (latest) to achieve required slump in concrete all complete as per specification & drawing for the following.			
a	M25 Grade	CUM	1156.71	0.06069325
207	Providing and laying Design Mix cement concrete conforming to IS:456 & IS 10262-2009 for reinforced concrete works of grade M-30 Grade in machine foundations for TG, Gas Turbine, ID/FD/PA fans, BFP, Coal mills at all elevations below/above finished floor level except TG deck and top decks supported over vibration isolation system including addition of suitable plasticizer conforming to IS 9103(latest) to achieve a slump more than 125mm in concrete as per manufacturer's recommendation with 20 mm nominal size graded aggregate in concrete all complete as per specification & drawing.	CUM	70	0.00388995
209	Extra over St. No. 205 to 207 for controlling of temperature of fresh concrete to less than 23 degree centigrade using ice, including all related arrangements for providing, storing and mixing of ice with water, cooling of aggregates etc. All complete as per specification, drawing and instruction of engineer in charge.	CUM	70	0.00123178
210	Extra over ST Nos. 205 to 207 for conducting UPV test for concrete at all levels including all equipments, making necessary arrangements, staging, submission of report etc. all complete as directed by engineer in charge and as per specification.	CUM	70	0.00263371
212	Screed concrete conforming to IS 456 with coarse sand and graded hard stone aggregate 12.5mm/6 mm nominal size on the roof at any level or thickness, drains etc complete as per following.			
b	1:1.5:3 (1 part cement, 1.5 part sand, 3 parts of aggregate by volume)(Not less than M-20	CUM	202.63	0.01027271
300 FORM WORKS				
Providing, fixing and removing formwork at any elevations for all structures, as per specifications and including all labour, material, scaffoldings and centering complete including pockets etc. complete as per drawing, specifications and as per direction of engineer in charge for the following.				
301A	Fairface form work with good quality water proof ply wood with film face of required thickness and smooth surface below finished ground floor level for foundations, footings, base of columns, walls, columns, pilasters, beams, mass concrete, trenches etc.	SQM	2642.42	0.01746082

VOLUME-III PRICE SCHEDULE, REV-00				
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.				
TENDER NO. PSER:SCT:NKP-C1999:19				
SCH-2 : PRICE BREAK UP				
ST. NO	DESCRIPTION OF ITEM	UNIT	Total Qty	Weightage
302A	Fairface form work with good quality water proof ply wood with film face of required thickness and smooth surface above finished ground floor level for columns, beams, suspended floors, roofs, lintels, cantilevers, staircases, landings, balconies, domes, arches, circular overhead tanks etc. for all heights.	SQM	3911.596	0.02994677
304	Providing, fixing and removing formwork in block-outs/pockets and openings (below 0.1 sqm plan area) at all elevations including cutting, formation of all shapes and all other operations required for making the required shape and size all complete as per specification, drawing and instruction of engineer in charge.			
b	Pockets of depths more than 150mm and upto 300 mm dept'	Each	20	0.00012925
c	Pockets of depths more than 300mm and upto 600 mm dept'	Each	33	0.00040154
d	Pockets of depths more than 600mm and upto 1000 mm dept'	Each	10	0.00019664
400 REINFORCEMENT				
402	Transportation,handling,straightening, cutting, bending, placing in position at any level, binding in position of steel reinforcements of TMT steel of grade Fe-500 HYSD confirming to IS:1786 including cost of binding wire, labour, scaffolding, transportation to & from stores etc complete all as per specifications, drawings and as directed by Engineer. (STEEL WILL BE SUPPLIED BY BHEL FREE OF COST)	MT	258.67	0.0324838
500 WATER PROOFING WORKS				
Water proofing works including all labour, material, equipment, transportation, handling, curing, sampling, testing etc at any level as per specification, drawings and as directed by engineer - in - charge. (CEMENT WILL BE SUPPLIED FREE OF COST BY BHEL AS PER TCC)				
501	Providing and laying underbed grading plaster with cement mortar 1:4 (1 cement : 4 sand) and average thickness as specified below including preparation of surface, batching, mixing, leveling etc. all complete.			
a.	Average 15 mm thickness	SQM	1495.925	0.00128447
506	Providing and applying PU based water proofing treatment with one coat of polyurethane or any other equivalent material based primer with an application rate of minimum 6 sq.m per litre and two successive liquid coatings of high solids content urethane pre-polymers or equivalent material based finish coats as per relevant IS/ASTM standards to form an elastomeric membrane with overall dry film thickness 1.5 mm subject to minimum 500 gm/sqm/coat application rate. Item includes surface preparation, polyscrim cloth /fabric for edges, joints & vulnerable points etc all complete as per specifications and directions of engineer in charge	SQM	5200.925	0.1026484
507	Providing and laying wearing course consisting of 25mm thick plain cement concrete of grade M15 (1:2:4) with graded aggregate of 12.5mm size cast in panels of maximum size 1.2mx1.2m and reinforced with 0.56 mm dia. galvanised chicken wire mesh and sealing of expansion joints (in grooves of 6mm X 6mm) using polysulphide sealant (cost of material & application of polysulphide sealant is included in this item) etc all complete.	SQM	6060.925	0.07410201
508 A	Providing and laying Pressed cement concrete flooring tiles of 22mm thickness and size 300X300 mm conforming to IS 13801 with 15 mm thick 1:4 cement mortar over the top most layer of roofing treatment with fine joints including sealing of expansion joints with polysulphide sealant (cost of material & application of polysulphide sealant is included in this item) etc all complete. (Water proofing paid elsewhere)	SQM	1495.925	0.01502347
512	Anti termite and Anti weeds chemical treatment of soil with Chloropyrifos emulsifiable or equivalents, concentrates (1%) conforming to IS :8944 all complete.	SQM	220	0.00001349
600 JOINTS AND FILLERS				
Joints & fillers including all labour, material, equipment, transportation, handling etc at any level as per specification, drawings and as directed by engineer - in - charge.				
601	Supplying & installation of bitumen impregnated fibre board confirming to IS 1838 as joint filler at joints in concrete including nailing, coating of both faces with coal tar pitch/bitumen etc. all complete			
c	25 mm wide joints	SQM	34	0.00051218
602	Providing and applying polysulphide based sealant conforming to IS:12118 in expansion joints in concrete including cleaning of joints, raking out groove, application of primer, scaffolding etc. all complete for following size grooves:			
a	12mm X 25mm	RM	200	0.00119815
608	Supply and instalation of Polystyrene flexible board confirming to IS 4671 (density between 25Kg/Cum to 30 Kg/Cum) as joint filler at joint of concrete including nailing, coating of both faces with coal tar pitch /butimen etc. all complete.			
a)	100mm thick	SQM	50	0.0010213
700 MS EMBEDMENTS				
Embedments including all labour, material, equipment, transportation, handling etc. at any level as per specification, drawings and as directed by engineer - in - charge.				
701	Transporting, fabricating and fixing of mild steel embedments, inserts, pipe sleeves, angle pieces, rungs of various diameters, plates of dimensions as required etc. including welding, bolting, cutting, drilling, scaffolding, setting etc. all complete.	MT	0.50	0.0001554
703	Fixing of embedments, inserts, pipe sleeves, angle pieces, anchor bolts of various diameters, plates of dimensions as required etc. including scaffolding, setting in position, transportation from BHEL site stores to work spot etc. all complete.	MT	21.50	0.00376701
704	Fabrication, transportation, delivery at site and erection, installation and alignment of mild steel foundation bolt assembly conforming to IS:2062 and grade 1 of IS:432 in concrete along with nuts, lock nuts (as per IS:1363, 1364 and IS:3138), washers, anchor plates, stiffner plates, protective tape, pipe sleeves, templates etc. including welding, cutting, grinding, threading, drilling etc. all complete	MT	1	0.000195
800 GROUTING				
Grouting including all labour, material, equipment, roughening surface, cleaning, ramming, curing etc. at any level unless otherwise specified as per specification, drawings and as directed by engineer - in - charge.				

VOLUME-III PRICE SCHEDULE, REV-00				
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.				
TENDER NO. PSER:SCT:NKP-C1999:19				
SCH-2 : PRICE BREAK UP				
ST. NO	DESCRIPTION OF ITEM	UNIT	Total Qty	Weightage
805	Providing & grouting of pocket holes, pipe sleeves and under base plates of structural steel work/ machinery/ pipe supporting structures including roughening of surface, cleaning, ramming, curing, etc. all complete with Conbextra GP-2 or equivalent. (Cost of all material and cleaning of the pockets by compressed air shall be in the scope of the contractor)(NOTE:Minimum characteristic strength of grouting shall be as per detail drawing all complete).	CUM	1	0.00065047
900 DOORS, WINDOWS, VENTILATORS, LOUVERS				
Doors, windows, ventilators, louvers, roof ventilators, rolling shutters, partitions including all labour, material, equipments, transportation, handling, preparation of working drawings etc. at any level as per specification, drawings and as directed by engineer - in - charge.				
904	Transporting and fixing single or double steel door shutters with 35 mm thk flush design shutter comprising of two outer sheets of 18 gauge steel sheets rigidly connected and reinforced inside with continuous vertical 20 gauge stiffeners, spot welded in position at not more than 150mm on centres including void filled with mineral wool (density as per specification), all fittings, Godrej or equivalent make mortice lock with handle on both sides, shop and final painting etc all complete.	SQM	8.20	0.00041517
906	Transporting, fitting and fixing anodized extruded aluminium doors (single or double shutter) conforming to IS:1948, IS:1949 fabricated from extruded sections of HINDALCO/JINDAL or equivalent make having minimum 3mm wall thickness as per IS:1285, IS:733 and anodized and electro color coating of required shade as per IS 1868 (minimum anodized coating of grade AC15). fixed with rawl plugs, expansion fasteners,SS screws / fixing clips necessary filling of gaps at Junctions, at top, bottom & sides with required PVC / neoprene felt for bi-metallic protection etc. Glazing shall be clear float glass of 6mm thickness including snap fit type beading, concealed screws, fixtures, Godrej or equivalent make Mortice lock with handle on both sides, etc all complete. Aluminium section shall be smooth, free of stains, straight, mitred & jointed mechanically wherever required. (Glazing shall be paid separately)	SQM	5	0.00010157
906A	Transporting and fixing anodized extruded aluminium doors (single or double shutter) conforming to IS:1948, IS:1949 fabricated from extruded sections of HINDALCO/JINDAL or equivalent make having minimum 2 mm wall thickness as per IS:1285, IS:733 and anodized(15 micron coating thickness) and electro color dyed of required shade as per IS 1868 (minimum anodized coating of grade AC15). fixed with rawl plugs, expansion fasteners,SS screws / fixing clips necessary filling of gaps at Junctions, at top, bottom & sides with required PVC / neoprene felt for bi-metallic protection etc. Glazing shall be clear toughened glass of 10 mm thickness including snap fit type beading, concealed screws, fixtures, Godrej or equivalent make Mortice lock with handle on both sides, etc all complete. Aluminium section shall be smooth, free of stains, straight, mitred & jointed mechanically wherever required. (Glazing shall be paid separately)	SQM	14.50	0.00026693
907	Providing and fixing fire proof steel doors (single or double shutter) with panic devices having 45mm thk flush design comprising of two outer sheets of 18 gauge steel sheets rigidly connected and reinforced inside with continuous vertical 20 gauge stiffeners, spot welded in position at not more than 150mm on centers including all fittings, shop painting with approved post office/signal red color fire resistant paint and mineral wool insulation (64 kg/cum density) complete and shall be fire proof as per IS:3614, TAC requirements and as per specification. Minimum ratings shall be 2 Hrs	SQM	25.2	0.00351565
909	Providing and fixing anodised aluminium work of Jindal, Hindalco or other equivalent approved make for door frames, windows, ventilators, partitions, railing etc with extruded standard tubular and other sections including all fittings & fixtures and accessories of approved make conforming to IS733 and IS1285, anodised and electro color dyed to required shade according to IS 1868 (minimum anodic coating of grade AC15), fixed with rawl plugs, expansion fasteners, SS screws or with fixing clips, including necessary filling of gaps at junctions, at top, bottom and sides with required PVC/neoprene felt for bi-metallic protection etc.including preparation of working drawings, aluminium cleat angle, aluminium snap-on-beading for glazing/panelling, stair case tread nosing, with all fittings and fixtures (like tower bolts, handles, door stopper with rubber shoes, 'L' drops, stays, floor springs, hydraulic door closures etc.), CP brass/stainless steel screws, providing and fixing hinges/pivots, and making provision for fixing of fitting wherever required including cost of PVC/neoprene gasket, all complete as per drawing, specification and instructions of engineer in charge (Glazing and panelling shall be paid separately).Weight of aluminium section only shall be measured.	Kg	1009	0.01061787
910	Providing and fixing of aluminium composite panel(ACP) of following thickness for external wall cladding at all heights and elevations consisting of 3mm thick thermoplastic core of anti oxidant LDPE sandwiched between 2 skins of 0.5mm thick aluminum alloy sheet making a total panel thickness of 4mm. The surface shall be finished with PVDF based coating of minimum 30 micron on the top & sides and polymer paint on reverse side. Coating shall conform to ECCA or AAMA,the surface shall be protected with self adhesive peel of masking foil. The system shall be designed to withstand a wind pressure of 200kg/Sqm and shall be fixed to the Masonry/RC walls with necessary clamps, brackets and anchor fasteners. All clamps and brackets shall be Hot dip galvanized minimum 80 microns thick and shall conform to IS: 4759-1996. The extruded aluminum section shall be anodized in approved colour with a anodic coating of minimum 20 microns. Extruded section shall be 6063 T5 or T6 alloy conforming to ASTM B221. Any other fastening straps, nuts, bolts, rivets, washers, etc. shall be in stainless steel SS304 grade. EPDM gaskets, open cell polyethylene backer rods, weather sealant etc. shall be provided as per requirement. Item shall include aluminium base frame with all fixing arrangements to wall/RC members, fastening material and hardware(fastening straps, nuts, bolts, rivets, washers etc.), EPDM gaskets, open cell polyethylene backer rods, weather sealant, scaffolding, approach to all height, material handling, transportation, labour, T&P, preparation of working drawings etc. all complete as per drawing, specification & instructions of engineer in charge. Measurement of payment shall be outer finished area of ACP panel.			
a	4mm	SQM	872	0.05424344

VOLUME-III PRICE SCHEDULE, REV-00				
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.				
TENDER NO. PSER:SCT:NKP-C1999:19				
SCH-2 : PRICE BREAK UP				
ST. NO	DESCRIPTION OF ITEM	UNIT	Total Qty	Weightage
910A	Providing and fixing of aluminium composite panel(ACP) of following thickness for internal encasement at all heights and elevations consisting of 3mm thick II B fire rated LDPE core mixed with mineral fibre sandwiched between 2 skins of 0.5mm thick aluminum alloy sheet making a total panel thickness of 4mm. The surface shall be finished with PVDF based coating of minimum 30 micron on the top & sides and polymer paint on reverse side. Coating shall conform to ECCA or AAMA.the surface shall be protected with self adhesive peel of masking foil. The system shall be designed to withstand a wind pressure of 200kg/Sqm and shall be fixed to the Masonry/RC walls with necessary clamps, brackets and anchor fasteners. All clamps and brackets shall be Hot dip galvanized minimum 80 microns thick and shall conform to IS: 4759-1996. The extruded aluminum section shall be anodized in approved colour with a anodic coating of minimum 20 microns. Extruded section shall be 6063 T5 or T6 alloy conforming to ASTM B221. Any other festering straps, nuts, bolts, rivets, washers, etc. shall be in stainless steel SS304 grade. EPDM gaskets, open cell polyethylene backer rods, weather sealant etc. shall be provided as per requirement. Item shall include aluminium base frame with all fixing arrangements to wall/RC members, fastening material and hardware(festering straps, nuts, bolts, rivets, washers etc.), EPDM gaskets, open cell polyethylene backer rods, weather sealant, scaffolding, approach to all height, material handling, transportation, labour, T&P, preparation of working drawings etc. all complete as per drawing, specification & instructions of engineer in charge. Measurement of payment shall be outer finished area of ACP panel.			
a	4 mm	SQM	124	0.01119547
911	Providing and fixing of door closers as per IS 3564 ,of approved make & quality all complete of following type :			
a	Over head hydraulic door closures	Each	6	0.00013109
913	Transporting and fixing in position rolling shutter of hot rolled double dipped galvanised steel lath section of 18 SWG tested mild steel strips at 75mm rolling centres interlocked together through their entire length and jointed together at the end by end locks mounted on specially designed pipe shaft with brackets, side guides and arrangements for inside and outside locking with push and pull operation including wire springs, top cover, primer & shop coats of approved enamel paint etc, all complete as per IS 6248 and specification of approved make of following types: The bottom lath shall be coupled to a lock plate fabricated from 3mm thick galvanised steel plate and securely rivetted with stiffening angles.(partly coiled and lath/full lath).			
b	Mechanically Operated	SQM	8	0.00035313
913A	Providing and fixing in position rolling shutter of hot rolled double dipped galvanised steel lath section of 18 SWG tested mild steel strips at 75mm rolling centres interlocked together through their entire length and jointed together at the end by end locks mounted on specially designed pipe shaft with brackets, side guides and arrangements for inside and outside locking with push and pull operation including wire springs, top cover, primer & shop coats of approved enamel paint etc, all complete as per IS 6248 and specification of approved make of following types: The bottom lath shall be coupled to a lock plate fabricated from 3mm thick galvanised steel plate and securely rivetted with stiffening angles.(partly coiled and lath/full lath).			
b	Mechanically Operated	SQM	1	0.00004414
915	Transporting, Fixing and fitting of glazing of first grade class in steel/aluminium/wooden frames, where ever required, cleaning after fixing including hardware, gaskets, clips, beadings etc. all complete as per Specification for the followings			
b	4 mm thick clear float glass	SQM	10.00	0.00005934
d	6 mm thick wired glass	SQM	5.00	0.00003671
g	6 mm thick tinted heat reflecting type float glass	SQM	127.00	0.0013337
j	Two nos. 6 mm thick clear toughened float glass hermetically sealed and separated by 12 mm thick air gap for thermal insulation (only single elevation area to be measured'	SQM	60.00	0.00099214
915A	Providing, Fixing and fitting of glazing of first grade class in steel/aluminium/wooden frames, where ever required, cleaning after fixing including hardware, gaskets, clips, beadings etc. all complete as per Specification for the followings			
b	4 mm thick clear float glass	SQM	1	0.00001978
d	6 mm thick wired glass	SQM	1	0.00002447
g	6 mm thick tinted heat reflecting type float glass	SQM	1	0.00003501
j	Two nos. 6 mm thick clear toughened float glass hermetically sealed and separated by 12 mm thick air gap for thermal insulation (only single elevation area to be measured'	SQM	1	0.00005512
918	Providing and fixing steel louvered window with ISMC 100 frame all round including verticals with 18G pressed steel louvers, painting etc. all complete.	SQM	10	0.00047376
922	Transporting and fixing electrically operated, self operable/closing, approved anodized aluminium framed glass door with 10 mm thk. tinted glass, all complete. Automatic Sliding operating system comprising of Advanced DC brushless motor, Automatic Reversing Safety Device, Suitable for door weight 100 kg, Opening speed : 90-110cm /sec (adjustable), Closing Speed : 40-110cm/sec (adjustable), opening time : within1-9 seconds after door stopped in opening, controller : 8 Bit micro computer, Motor (Dortexor equivalent) : DC12V, 35W brushlees motor, Power Voltage : AC 110V - 240V. 50Hz - 60Hz, Power Consumption : 45W including Infra Red Sensors 2No both sides, rails & top & bottom as required, any aother accessories as required etc. all complete of best make and quality as approved by Engineer in charge. The door shall be double panel sliding door of approx. area 5 sq.m. to 7.5 sq.m. each	Nos.	12	0.00915888
922A	Supply of electrically operated, self operable/closing, approved anodized aluminium framed glass door with 10 mm thk. tinted glass, all complete. Automatic Sliding operating system comprising of Advanced DC brushless motor, Automatic Reversing Safety Device, Suitable for door weight 100 kg, Opening speed : 90-110cm /sec (adjustable), Closing Speed : 40-110cm/sec (adjustable), opening time : within1-9 seconds after door stopped in opening, controller : 8 Bit micro computer, Motor (Dortexor equivalent) : DC12V, 35W brushlees motor, Power Voltage : AC 110V - 240V. 50Hz - 60Hz, Power Consumption : 45W including Infra Red Sensors 2No both sides, rails & top & bottom as required, any aother accessories as required etc. all complete of best make and quality as approved by Engineer in charge. The door shall be double panel sliding door of approx. area 5 sq.m. to 7.5 sq.m. each	Nos.	1	0.00157092
1000 BRICKWORK				
Brickwork masonry including all labour, material, equipment, transportation, handling, scaffolding etc. at all levels as per specification, drawings and as directed by engineer - in - charge. (CEMENT WILL BE SUPPLIED FREE OF COST BY BHEL AS PER TCC)				

VOLUME-III PRICE SCHEDULE, REV-00				
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.				
TENDER NO. PSER:SCT:NKP-C1999:19				
SCH-2 : PRICE BREAK UP				
ST. NO	DESCRIPTION OF ITEM	UNIT	Total Qty	Weightage
1001	Providing brick work in cement mortar 1:6 (1 part cement 6 parts coarse sand) in walls, chambers etc. in thickness varying from 230mm to 460mm at all depths, places and positions below plinth including raking out joints, curing, scaffolding etc. complete excluding plastering and painting.			
a	Using fly ash lime bricks confirming to IS 12894 with crushing strength of 50 kg/cm ²	CUM	302	0.02542635
1002	Providing brick work in cement mortar 1:6 (1 cement 6 coarse sand) in walls, chambers etc. in thickness 230mm at all heights, places and position above plinth including raking out joints, curing, scaffolding etc complete excluding plastering and painting.			
a	Using fly ash lime bricks confirming to IS 12894 with crushing strength of 50 kg/cm ²	CUM	1097.240	0.10577202
1004	Providing brick soling including spreading of earth, ramming, watering including 25mm thick cushion of sand complete but excluding excavation and disposal of surplus earth (excavation and disposal of surplus earth shall be measured under applicable item). Using brick on edge			
a	Using fly ash lime bricks confirming to IS 12894 with crushing strength of 75 kg/cm ²	SQM	150.72	0.00172168
1000B	Providing factory made composite modular light weight aerated concrete panels of minimum fire rating, thickness as per specification, consisting of two fiber reinforced cement sheets(min. 4 mm thick) on either side of light weight concrete core, having min. compressive strength of 35 Kg/Cm ² and density in the range of 700-900 Kg/Cu.M. to provide external wall and internal partition at all levels. The panels shall be fixed in position through tongue and groove jointing system by screwing the panels to top & bottom U channels(channels min. 1.25 mm thick and galvanized to min. grade 180 as per IS:277), fixing U profiled top & bottom channels to concrete/primary steel members which are placed at max vertical spacing of 4.5 M with the help of galvanized steel expansion fasteners, filling the joints from both faces with silicon acrylic paste and making the same water tight by covering with fiber glass tape(min. 50 mm wide & min. 0.5 mm thick) or by any other suitable material, so as to ensure that entire construction done is weather proof and panel surfaces are fush for painting, creating opening for doors/windows/ventilators/ducts/pipes/fans/AC etc. and finishing the opening with same U profiled galvanized steel channel which is used at top & bottom. The wall must be capable of sustaining wind pressure of 4.5 M height within limiting deflection of span/250	SQM	500	0.05552421
1100 DAMP PROOF COURSE				
Damp proof course including all labour, material, equipment, transportation, handling, shuttering, centering, curing etc at any level as per specification, drawings and as directed by engineer - in - charge.				
1101	Providing Damp Proof Course 50mm thick 1:1.5:3 concrete (10mm and down graded aggregate) with 2% of approved admixture of water proofing compound all complete. Two layers of hot bitumen coating 85/25 grade as per IS:702 @ 1.7Kg./sqm shall be applied one before & one after the DPC. (CEMENT WILL BE SUPPLIED FREE OF COST BY BHEL AS PER TCC)	SQM	5	0.00002569
1200 CEMENT MORTAR PLASTER				
Cement mortar plaster including making grooves wherever required including all labour, material, scaffolding, curing etc at any level as per specification, drawings and as directed by engineer - in - charge. (CEMENT WILL BE SUPPLIED FREE OF COST BY BHEL)				
1201	Providing 18mm thick plaster in two layers outside the building/boundary wall in cement mortar 1:6 on walls, finished to a smooth finish including providing 3mmx3mm size grooves at junctions of two dissimilar materials all complete.	SQM	2978.40	0.00710954
1202	Providing 12mm thick plaster inside the building/boundary wall in cement mortar 1:6 on walls finished to a smooth finish as per specification all complete.	SQM	3020.91	0.00501269
1203	Providing 12mm thick plaster in cement mortar 1:6 on walls with rough finish all complete	SQM	15.00	0.00002484
1204	Providing 6mm thick plaster on ceiling in cement mortar 1:4 finished to a smooth all complete	SQM	60.16	0.00009895
1207	Forming groove of uniform size from 12X12 mm upto 20X15 mm in plastered surface as per approved pattern, using wooden battens nailed to the under layer, including removal of wooden battons, repair of the edges of plaster panel and finishing the groove etc. complete as per specification, drawing and the instructions of engineer in charge.	RM	450	0.00015725
1208	Providing drip coarse in cement morter (1:3) of min. width 25 mm on plastered surface at all elevations for all type of work such as chajjas, parapet, projections etc. including scaffolding, finishing etc. complete with all labour, tools and plants as per specification, drawing and instructions of engineer in charge.	RM	450	0.00045773
1300 FINISHES TO CONCRETE / PLASTERED SURFACES				
Finishes, painting to concrete, plastered surfaces including all labour, material, equipment, surface preparation, scaffolding etc. at any level as per specification, drawings and as directed by engineer - in - charge.				
1304	Two or more coats of acrylic distemper of approved brand and manufacture to give an even shade including a priming coat with distemper primer complete as per IS 428	SQM	150.00	0.00015982
1305	Providing and applying two or more coats of acrylic emulsion paint as per IS 5411 of approved brand, shade and manufacture to give smooth, hard, durable & glossy finish over a coat of primer over prepared plaster surface as per manufacturers guideline.	SQM	4482.51	0.00708538
1306	Providing and applying 2 or more coats of acid/alkali chemical resistant paint of approved brand and colour to floors, walls and ceiling including preparation of surface to receive paint, providing and applying bitumen primer confirming to IS 158 complete all as per manufacturer's recommendations and as approved by engineer, at all heights above or below grade level, complete as per specifications.	SQM	7.46	0.00003609
1306A	Providing and applying of two or more coats of Oil resistant paint of approved brand and Manufacturer to five an even shade on surface all complete as per specification	SQM	570	0.00259397
1400 FLOORING AND SKIRTING				
Flooring and skirting at any level including base layer, labour, material, equipments, transportation, handling, curing, polishing etc. at any level as per specification, drawings and as directed by engineer - in - charge. (CEMENT WILL BE SUPPLIED FREE OF COST BY BHEL AS PER TCC)				
1401	Providing and laying 50 mm thick heavy duty cement concrete in flooring with metallic hardener pigmented topping 12mm thick uniform graded treated iron paricles in flooring. Under layer of 38mm thick cement concrete mix 1:2:4 (1 cement: 2 sand : 4 stone aggregates 12.5mm well graded) and top layer of 12mm thick metallic concrete of mix 1:2 (1 cement hardner mix with approved quality metallic hardening compound :2 stone aggregate 6mm nominal size) by volume including cement slurry, rounding off edges, aluminium strips etc. all complete for following (Quoted item rate shall be inclusive of providing glass joint strips):	SQM	2247.08	0.01435782

VOLUME-III PRICE SCHEDULE, REV-00				
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.				
TENDER NO. PSER:SCT:NKP-C1999:19				
SCH-2 : PRICE BREAK UP				
ST. NO	DESCRIPTION OF ITEM	UNIT	Total Qty	Weightage
1402	Providing and laying 25 mm thick heavy duty cement concrete mix 1:2:4 (1 cement: 2 sand : 4 stone aggregates) flooring with metallic hardener pigmented topping of 10 mm thick uniform graded treated iron particles in skirting and dado complete as per specification.	SQM	39.00	0.00018675
1417A	Providing and laying vitrified ceramic tiles of matt finish of size 800x800mm from reputed / approved manufacturer including underbed of cement mortar 1:3 with neat cement slurry etc. all complete for following.			
b	10mm thick tiles In flooring	SQM	386.57	0.00925403
1417B	Laminated wooden flooring	SQM	110	0.00523528
1420	Providing and laying Heavy Duty dust pressed Ceramic Tiles of 7mm thick of reputed manufacturer of approved finish shade and colour including underbed of cement mortar 1:3 with neat cement slurry etc. all complete.			
a	300X300 mm	SQM	48	0.00071611
1422	Providing & fixing Acid / Alkali resistant (Chemical resistant) tiles confirming to IS:4457 and IS: 4860 in flooring/Dado and shall be laid over bitumastic lining of min 12mm thick (to be laid in layers of 6mm each). The tiles shall be applied with 6mm thick Potassium Silicate bedding mortar as per IS:4441, 4443 & 4832 and including preparation of surface, application of bitumen primer, curing etc. all complete for following thicknesses. The tiles should be abrasion resistant & durable.			
a	20mm thick	SQM	3.55	0.00011383
1427	Providing and fixing glazed designer ceramic tiles of approved color and design of size 200x300mm / 300x300mm in dado of approved size, projecting 6mm uniformly from adjacent plaster or wall finish. The mix for 20mm thick underbed plaster shall consist of 1part cement and 3 parts sand by weight. fairly moist but firm, tiles shall be pressed over under bed by applying cement slurry @ 3.3 Kg/sqm including pigments, curing etc all complete for following thicknesses:			
b	7mm thick	SQM	122.20	0.00159541
1500	ROOFING/SIDE CLADDING			
	Roofing / side cladding work including all labour, material, equipment, transportation, handling, scaffolding, lapa, hooks, washers, corner pieces etc. at any level as per specification, drawings and as directed by engineer - in - charge.			
1503	Transporting and fixing SINGLE SKIN, PROFILED, PERMANENT COLOR COATED M.S. CLADDING SHEET : TYPE-I of approved shade and color, (ON EXTERNAL VERTICAL FACE OF BUILDINGS) of 0.6mm bare metal thickness(BMT) having minimum yield strength OF GRADE SS255 AS PER ASTM A653M/GRADE G250 AS PER AS 1397 COATED WITH ZINC OF CLASS DESIGNATION Z275 as per specification including fixing to supports / rails by concealed fixing system, corrosion resistant self tapping / self drilling type fasteners with suitable cap, flashing etc. all complete as per specification.The sheet shall be permanently coated with silicon modified polyester(SMP silicon content min. 30%) paint or super polyester paint of minimum 20 micron DFT on exposed surface (facing operating floor) and minimum 5 micron on other face over epoxy primer of 5 micron applied over coating (designated class Z275). The permanent colour coated sheet shall meet the general requirements of IS : 14246 and shall conform to class 3 for the durability. The SMP and polyester paint shall confirm to product type 4 as per AS/NZS 2728.	SQM	7000	0.03813995
1508	Providing and installing under deck insulation using minimum 0.05 mm thick aluminium foil on exposed surface followed by 0.60 mm dia and 25 mm mesh GI wire netting, fixed at various elevations with rawl plugs including clips and 2mm wire ties with roof but excluding cost of insulation	SQM	290	0.00590266
1600	FALSE CEILING			
	False ceiling including all labour, material, equipment, transportation, handling, suspension system etc at any level as per specification, drawings and as directed by engineer - in - charge.			
1601	Providing and fixing tapered/square edge glass fibre reinforced gypsum board (GRG) ceiling (having gypsum core mixed with glass fibre) system confirming to IS:2095 having fine texture finish and consisting of light weight galvanized steel member(min. 0.8 mm thick and galvanized as per IS 277) having maximum grid size of 1200 mm X 600 mm for supporting panels of specified size, suspended from RCC slab/structural steel or catwalkway grid above with 4 mm (minimum) galvanized wires (rods) with special height adjustment clips, including preparation of working drawing, providing openings for AC ducts, return air grills, light fixtures etc (but excluding the cost of catwalkway grid) all complete as per drawings, specification and instructions of the engineer.			
b	12.5mm thick GRG board confirming to IS: 2095 with galvanised light gauge steel load bearing supporting GI frame (minimum 0.8mm thk and grid size of 600x1200mm.) and finished flat (seamless)	SQM	801	0.01875414
1602	Providing, fixing and laying light weight mineral fiber board false ceiling in the form of tile of minimum thickness 15 mm and exposed surface semi-perforated with depth of perforation as 4 mm and humid resistance of 95% RH and fire performance of class 0/1 as per BS 476 with metal suspension grid system with galvanized Tees of section 24 X 38 mm for main runners of approved colour and make as per specification including 50mm thick mineral wool insulation (density 48kg/cum) as per IS:8183 bound in polythene bags on top of panels. Additional hangers and height adjustment clips shall be provided for return air grills, light fixtures. A.C. ducts etc. suitable M.S. channel (minimum MC 75 @ 1.2m) grid shall also be provided above the false ceiling level for movement of personnel to facilitate maintenance of lighting fixtures, AC ducts etc. complete with cut-outs etc.The size of tiles shall be 600 X 600 mm or 600 X 1200 mm. Required MS channel shall be measured & paid extra under respective item unit rate.	SQM	126.57	0.00241698
1602A	Providing fixing and laying Calcium Silicate Board of 'HILUX' or equivalent with suspension system as per manufacturer detail including supporting grid system, expansion fastener for suspension arrangement from RCC with necessary opening provision as per drawing all complete	SQM	567	0.03522852

VOLUME-III PRICE SCHEDULE, REV-00				
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.				
TENDER NO. PSER:SCT:NKP-C1999:19				
SCH-2 : PRICE BREAK UP				
ST. NO	DESCRIPTION OF ITEM	UNIT	Total Qty	Weightage
1603	Providing and fixing permanently colour coated aluminium false ceiling of approved colour and Luxalon 84 C or approved equivalent with corrosion resistant aluminium alloy panels of minimum thickness 0.5mm including 50mm thick mineral wool insulation(density 48 kg/cum) conforming to IS:8183 bound in polythene bags on top of panels. Additional hangers and height adjustment clips shall be provided for return air grills, light fixtures, A.C. ducts etc all complete. Suitable M.S. channel grid with minimum MC 75 shall also be provided above the false ceiling level for movement of personnel to facilitate maintenance of lighting fixtures, AC ducts etc. (supply, fabrication & erection of structural platform grid made up of MS Channels/ Beams / Angles shall be paid separately under ST No 2301B and is not included in this item)	SQM	295	0.01490347
1700 RAIN WATER DOWN TAKE PIPES				
Rain water down take pipes including all labour, material, transportation, 2 coats of approved paint over one primary coat, fixtures, accessories etc at any level as per specification, drawings and as directed by engineer - in - charge.				
1707	Fixing GI down take pipes conforming to IS:1239 /IS:3589 of medium duty all complete for following diameters.			
a	150 mm Dia	RM	150	0.00113433
1800 MISCELLANEOUS WORKS				
Miscellaneous works including all labour, material, equipment etc. at any level unless otherwise specified as per specification, drawings and as directed by engineer - in - charge.				
1801	Providing and Filling in trenches, plinths, area paving and other underground structures with graded stone aggregate of size range 63 mm to 45 mm in layers not exceeding below mentioned thickness including breaking of stone boulders to required sizes, filling the interstices with selected sand and compacting to 85 % of original volume of stone stack for all lifts etc. all complete. Payment shall be made for the measurement of the volume of the compacted fill.			
a	275 mm thick	CUM	25	0.00067575
b	400 mm thick	CUM	5	0.00012412
1810	Transporting, laying and fixing rails and guide rails in concrete for transformer, rail track including cutting of rails, joining of rails, anchoring lugs etc all complete	MT	1.70	0.00091008
1812	Laying of earthing mats/rods including risers, transportation from yard stores, loading, unloading, cutting to length, welding, protective painting of joints etc. all complete. (Excavation & Back filling shall be paid separately under respective item of earth work. Earthing mats/rods shall be supplied by BHEL free of cost)	MT	2	0.00025183
1813	Providing Earthing pit as per drawing with charcoal & salt, GI pipes, GI earth electrodes, GI wire, GI strips, brick chamber with covers including associated earthwork etc. all complete.	EACH	20	0.00861166
1814	Construction of below ground earthing system test pits as per drawing/ sketches including brickwork, plaster, concreting, reinforcement, formwork, providing & fixing GI strips/pipes, GI wires, covers etc as per drawing & specification including associated earthwork.	EACH	20	0.00677002
1815	Providing and fixing GI rungs in concrete/brick walls having zinc coating of minimum 900 g/sqm etc. all complete.	Kg	2	0.00000329
1825	Supply and laying approved quality Stone aggregate 40mm size in transformer yards	CUM	440	0.01891124
2000 FENCING AND GATES				
Fencing and gates including all labour, material, equipment etc at any level as per specification, drawings and as directed by engineer - in - charge.				
2003	Supplying and erecting in position 2.4 m high PVC coated gavanised chain linked fencing of minimum 8 gauge (including PVC coating) of mesh size 75mm x 75mm. The diameter of the hot dip galvanised steel wire for chain link fencing excluding PVC coating shall not be less than 12 gauge. Concertina of height of 600 mm at top of chain link fencing shall be provided with all accessories. Concertinal shall be from tensile serrated galvanised wire (HTSW) made with wire diameter of 2.5 mm which will be stretched to 6m and attached on two strands of galvanised HTSSW (high tensile spring steel wire) of 2.5mm dia by means of clips at 1m interval. These two HTSSW strands will be attached to the fence posts/ angles with 12 mm security fasteners. Cost to include for GI hook bolts, rings & washers, hot dip galvanised tension wires, 25X6 mm GI flat stretcher bar at end posts etc. all complete. (Structural post shall be separately under ST No. 2007)	RM	1800	0.06989912
2006	Supplying and fixing 600mm high concertina on top of boundary wall including GI tension wires, clips, anchors, accessories etc. all complete. Concertinal shall be from tensile serrated galvanised wire (HTSW) made with wire diameter of 2.5 mm which will be stretched to 6m and attached on two strands of galvanised HTSSW (high tensile spring steel wire) of 2.5mm dia by means of clips at 1m interval. These two HTSSW strands will be attached to the fence posts/ angles with 12 mm security fasteners. (Structural post shall be separately)	RM	1800	0.00836259
2008	Supply, fabrication and fixing of mild steel posts for fencing including painting etc all complete as per specification.	MT	6	0.00646151
2010	Supply, fabrication and installing in position and testing MS Gates out of channels, joists, angles, flats, plates, pipes, welded steel wire mesh & sheets including stiffners, bracings, fabricated hinges, MS Aldrops with locking arrangement, tempered steel pivot, guide track of MS Tee, bronze aluminium ball bearing arrangements, castor wheels, paintings etc. all complete.	MT	4	0.00521864
2100 WATER SUPPLY				
Water supply work including men, material, equipment etc. at any level as per specification, drawings and as directed by engineer - in - charge.				
2106	Providing and fixing 610mmx453mmx6mm thk mirror from reputed mirror manufacturer. Mirror shall be mounted with glass adjustable revolving CP brackets with CP screws etc all complete.	EACH	2	0.00003904
2108	Providing and fixing 25 mm diameter stainless steel towel rails (600mm X 25mm) all complete	EACH	4	0.00004563
2110	Providing and fixing C.P. soap holder mounted with C.P. screws etc all complete	EACH	6	0.00005717
2111	Providing and fixing stainless steel / C.P. liquid soap dispenser. Dispenser shall be round and easily revolving with removable threaded nozzle and mounted on C.P. brackets etc all complete	EACH	5	0.00004577
2112	Providing and fixing glazed vitreous wall mounted paper holder with suitable cover cum cutter fitted with CP screws etc. sll complete.	EACH	5	0.00004809

VOLUME-III PRICE SCHEDULE, REV-00				
JOB: BALANCE CIVIL AND ARCHITECTURAL WORKS ETC. OF BTG AREA FOR UNIT # 1 & 3 OF 3X660 MW NORTH KARANPURA STPP, JHARKHAND.				
TENDER NO. PSER:SCT:NKP-C1999:19				
SCH-2 : PRICE BREAK UP				
ST. NO	DESCRIPTION OF ITEM	UNIT	Total Qty	Weightage
2115A	Providing and fixing approved stainless steel Pantry sink as per IS: 13983 of size 610x510mm, bowl depth 200mm with drain board of at least 450 length with trap, heavy duty CP and cold mixer, including CI brackets, stainless steel chain with rubber plug, 40mm dia CP brass waste trap, with necessary union complete with painting of fittings, cutting and making good the wall where required including required notching in counter grating slab etc, complete.	EACH	1	0.00014188
2200 SANITARY WORKS				
Sanitary work including all labour, material, equipment etc. at any level as per specification, drawings and as directed by engineer - in - charge.				
2214	Providing and fixing square mouth S.W Gully trap grade 'A' complete with CI grating, brick masonry chamber and water tight CI cover with 300x300mm (inside). The weight of cover to be not less than 4.53 Kg and frame to be not less than 2.72 Kg etc all complete for following sizes			
a	100x100mm P or S Type.	EACH	2	0.00009962
b	150x100mm P or S Type.	EACH	2	0.00010219
2215	Providing and fixing C.I. floor traps with C.P jalli all complete	EACH	6	0.00015633
2219	Providing and fixing white vitreous urinal partitions of size 675x325x85mm all complete	EACH	6	0.00026375
TOTAL				1.00000000