

भाग बी - प्राइस बिड
PART B - PRICE BID

Name of Work : **CONSTRUCTION OF BOUNDARY WALL IN E TYPE QUARTERS
IN BHEL TOWNSHIP, SECTOR-17, NOIDA**

NIT No. : **12:AA:NOI:ADMN.:BW-E TYPE:112:2018-19**
Dated : **06.06.2018**

Sl. No.	Description of Item	unit	Qty.	Rate	Amount (Rs)
1	Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-charge.All kinds of soil	cum	90.00	110.84	9975.24
2	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.	cum	90.00	110.66	9959.40
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:3:6 (1 Cement : 3 coarse sand (zone-III) : 6 graded stone aggregate 20 mm nominal size).	cum	15.00	4335.76	65036.40
4	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in: Cement mortar 1:6 (1 cement : 6 coarse sand)	cum	75.00	4181.45	313608.90
5	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:6 (1 cement : 6 coarse sand)	cum	15.00	4912.91	73693.62
6	Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level. Cement mortar 1:4 (1 cement :4 coarse sand)	sqm	430.00	602.10	258901.28
7	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand)	sqm	900.00	148.06	133254.00
8	20 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand)	sqm	692.00	204.91	141796.34


Varun

 **वरुण कुमार गर्ग**
वरि. कार्यपालक (भा. सं.-टीएएफसी)
Varun Kumar Garg
Sr. Executive (HR-TAX)
भारत हेवी इलेक्ट्रिकल्स लि., सम्पदा कार्यालय, सेक्टर-17, नोडा
Bharat Heavy Electricals Ltd., Estate Office, Sector-17, Noida

Signature & Seal of Bidder

9	Washed stone grit plaster on exterior walls height upto 10 metre above ground level, in two layers, under layer 12 mm cement plaster 1:4 (1 cement : 4 coarse sand), furrowing the under layer with scratching tool, applying cement slurry on the under layer @ 2 Kg of cement per square metre, top layer 15 mm cement plaster 1:1/ 2:2 (1 cement: 1/2 coarse sand : 2 stone chipping 10 mm nominal size), in panels with groove all around as per approved pattern, including scrubbing and washing the top layer with brushes and water to expose the stone chippings ,complete as per specification and direction of Engineer-in- charge (payment for providing grooves shall be made separately).	sqm	300.00	512.69	153806.40
10	Extra for using white cement in place of ordinary cement in the top layer of the item of washed stone grit plaster.	sqm	300.00	56.23	16869.60
11	Finishing walls with Acrylic Smooth exterior paint of required shade New work (Two or more coat applied @ 1.67 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)	sqm	2400.00	84.52	202857.60
12	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade, two or more coats on new work.	sqm	200.00	68.99	13798.40
13	Providing and fixing hand rail of approved size by welding etc. to steel ladder railing, balcony railing, staircase railing and similar works, including applying priming coat of approved steel primer. M.S. tube	Kg	4500.00	80.96	364320.00
14	Carriage of material by mechanical transport including loading, unloading and stacking Lime, moorum, building rubbish Beyond Beyond Beyond 5 km 10 km.	cum	50.00	143.20	7160.12
15	Supplying and fixing of 32 mm sizes of medium class PVCconduit along with accessories in surface/recess including cuttingthe wall and making good the same in case of recessed conduit as required.	mtr.	300.00	78.32	23496.00
16	Total Estimated Expenditure (GST)in Rs.				1788533.30
17	Percentage Above(+)/ Below(-) at par with S. No. 16				
18	Total Quoted Amount after applying percentage (S. No. 17) (excluding of GST) in Rs.				
19	Total Amount inclusive of GST (in Rs.)				
20	NET AMOUNT				

(--sd--)

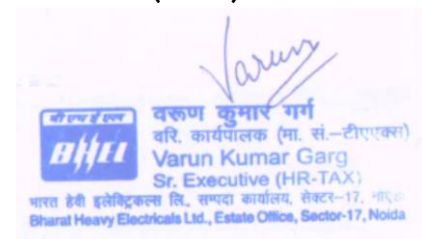

(Varun Kr. Garg)
Sr. Executive (HR-TAX)
On behalf of "BHEL"

Signature & Seal of Bidder