



भारत हेवी इलेक्ट्रिकल्स लिमिटेड

(भारत सरकार का उपक्रम)

BHARAT HEAVY ELECTRICALS LIMITED

(A Govt. of India Undertaking)

Ref: PSER:SCT:NBN-C2027:7869

Date: 21-02-2020

NOTICE INVITING TENDER

NOTE: INTENDING BIDDER TO PARTICIPATE MAY DOWNLOAD FROM WEB SITES

Sealed offers in two part bid system are invited from reputed & experienced bidders meeting PRE QUALIFICATION CRITERIA as mentioned in Annexure-1 through E-Procurement Portal <https://bhel.abcpocure.com> only, for the subject job by the undersigned on the behalf of BHARAT HEAVY ELECTRICALS LIMITED as per the tender document. Issue/ forwarding intimation regarding tender to any bidder shall not construe that the bidder is considered to be qualified. Consideration of their offer is subject to CUSTOMER APPROVAL & compliance of loading criteria as per clause no. 8.0 of NIT etc. specified below. Following points relevant to the tender may please be noted and complied with.

1.0 Salient Features of NIT

SL NO	ISSUE	DESCRIPTION
i	TENDER NUMBER	PSER:SCT:NBN-C2027:20
ii	Broad Scope of job	Levelling Grading, Piling work including testing of piles and other associated works etc. of FGD system for 3x660MW NPGCL Nabinagar TPP, Bihar.
iii	DETAILS OF TENDER DOCUMENT	
a	Volume-IA	General conditions of contract (Supply)
b	Volume-IB	General conditions of contract (Service)
c	Volume-IC	Special conditions of contract (Supply)
d	Volume-ID	Special conditions of contract (Service)
e	Volume-IE	Forms and Procedures etc.
f	Volume-IF	Technical Conditions of Contract (TCC) (CML, TS, DWG)
g	Volume-III	Price Schedule (Absolute value) – Rev-00
iv	ISSUE OF TENDER DOCUMENTS	This is an E-tender floated online through our E-Procurement Site https://bhel.abcpocure.com . Start date of the tender: 21-02-2020.
v	DUE DATE & TIME OF OFFER SUBMISSION	Date: 06-03-2020, Time: 15-00 Hrs. The bidder should respond by submitting their offer online in our e-Procurement platform at https://bhel.abcpocure.com only. Offers are invited in two-parts only. Hard copy bid or bids through email/fax shall not be accepted.
vi	OPENING OF TENDER	Date: 06-03-2020 1 hour after the latest due date and time of Offer submission Notes: (1) In case the due date of opening of tender becomes a non-working day, tenders shall be opened on next working day at the same time. (2) Bidder may depute representative to witness the opening of tender.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

vii	EMD AMOUNT	Rs. 23,00,000/-.	Applicable.
viii	COST OF TENDER	Rs. 10,000/-.	Applicable.
ix	LAST DATE FOR SEEKING CLARIFICATION	Date: 02-03-2020 Along with soft version also, addressing to undersigned & to others as per contact address given below	Applicable.
x	SCHEDULE OF Pre Bid Discussion (PBD)	--	Not Applicable (In case BHEL decides to conduct PBD, date, time & venue of PBD will be intimated suitably thru TCN.)
xi	INTEGRITY PACT & DETAILS OF INDEPENDENT EXTERNAL MONITOR (IEM)	IEM DETAILS: Refer Clause No 34.0 below.	Applicable.
xii	Latest updates	Latest updates on the important dates, Amendments, Correspondences, Corrigenda, Clarifications, Changes, Errata, Modifications, Revisions, etc to Tender Specifications will be hosted in BHEL webpage (www.bhel.com) ; CPP portal & E-Procurement Site https://bhel.abcpurchase.com only. Bidders to keep themselves updated with all such information.	Shall be intimated to bidder.

2.0 The offer shall be submitted as per the instructions of tender document and as detailed in this NIT. Bidders to note specifically that all pages of tender document, including these NIT pages of this particular tender together with subsequent correspondences shall be submitted by them, duly digitally signed & stamped on each page, as part of offer. Rates/Price including discounts/rebates, if any, mentioned anywhere/ in any form in the techno-commercial offer other than the Price Bid, shall not be entertained.

3.0 Unless specifically stated otherwise, bidder shall remit cost of tender (non-refundable) and courier charges if applicable, in the form of Demand Draft drawn in favour of Bharat Heavy Electricals Ltd, payable at Kolkata, issuing the Tender, along with techno-commercial offer.

4.0 Unless specifically stated otherwise, bidder shall have to deposit EMD through Demand Draft/Pay Order in favour of Bharat Heavy Electricals Ltd, payable at Kolkata. For other details please refer General Conditions of Contract.

Bidders may please be noted that "OEMD" provision stands deleted. Hence, bidders who have deposited Rs. 2 Lakh as OEMD are also requested to submit fresh EMD as mentioned in sl no vii under clause no 1.0 of NIT.

5.0 Procedure for Submission of Tenders: The Tenderers must submit their Tenders as detailed below:

DOCUMENTS TO BE UPLOADED & MODALITY OF UPLOADING

Sl no	Description	Remarks
PART-I A	(TECHNO COMMERCIAL BID)	
	CONTAINING THE FOLLOWING:-	
i.	Covering letter/Offer forwarding letter of Tenderer. (To be attached in relevant Attachment section)	
ii.	Duly filled-in 'No Deviation Certificate' as per prescribed format. (To be	

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

	attached in relevant Attachment section) <u>Note:</u> a. In case of any deviation, the same should be submitted separately for technical & commercial parts, indicating respective clauses of tender against which deviation is taken by bidder. The list of such deviation shall be attached in relevant attachment section of the e-procurement portal. It shall be specifically noted that deviation recorded elsewhere shall not be entertained. b. BHEL reserves the right to accept/reject the deviations without assigning any reasons, and BHEL decision is final and binding. i). In case of acceptance of the deviations, appropriate loading shall be done by BHEL ii). In case of unacceptable deviations, BHEL reserves the right to reject the tender	
iii.	Supporting documents/ annexures / schedules/ drawing etc as required in line with Pre-Qualification criteria. It shall be specifically noted that all documents as per above shall be attached in relevant attachment section and credential certificates issued by clients shall distinctly bear the name of organization, contact ph no, FAX no, etc.	
iv.	All Amendments/Correspondences/Corrigenda/Clarifications/Changes/ Errata etc pertinent to this NIT. (To be attached in relevant Attachment section)	
v.	Integrity Pact Agreement (Duly signed by the authorized signatory)	Applicable.
vi.	Duly filled-in annexures, formats etc as required under this Tender Specification/NIT (To be attached in relevant Attachment section)	
vii.	Notice inviting Tender (NIT) (To be attached in relevant Attachment section)	
viii.	Volume – I F: Technical Conditions of Contract (TCC) (To be attached in relevant Attachment section)	
ix.	Volume – I D: Special Conditions of Contract (SCC)-Service (To be attached in relevant Attachment section)	
x.	Volume – I B: General Conditions of Contract (GCC)-Service (To be attached in relevant Attachment section)	
xii.	Volume – I E: Forms & Procedures etc. (To be attached in relevant Attachment section)	
xiii.	Volume–III - (UNPRICED – without disclosing rates/price, but mentioning only 'QUOTED' or 'UNQUOTED' against each item. (To be attached in Unpriced Bid Attachment section)	
xiv.	Any other details preferred by bidder with proper indexing. (To be attached in relevant Attachment section)	

PART-I B	EMD/ COST OF TENDER (To be submitted offline within due date of offer submission)	
	CONTAINING THE FOLLOWING:-	
i.	1. Earnest Money Deposit (EMD) in the form as indicated in this Tender 2. Cost of Tender (Demand Draft or copy of Cash Receipt as the case may be)	

PART-II	PRICE BID (TO BE ATTACHED IN PRICE BID ATTACHMENT SECTION)	
	CONTAINING THE FOLLOWING:-	
i	Covering letter/Offer forwarding letter of Tenderer enclosed in Part-I	
ii	Volume III – PRICE BID (Duly Filled in Schedule of Rates – rate/price to be entered in words as well as figures) Any other document uploaded in the price bid, apart from above tender format, shall not be taken into cognizance for evaluation of offer.	

SPECIAL NOTE:

- A) Your offer & documents submitted along with offer shall be digitally signed & stamped in each page by your authorised representative. No overwriting/ correction in tender documents by bidders shall be allowed. However, if correction is unavoidable, the same may be signed by authorized signatory.
- B) The credentials/ documents submitted towards compliance of Pre-qualification requirement shall be physically signed by the authorized signatory & stamped before uploading/submission with the offer in the e-procurement portal.
- C) All documents/ annexures submitted with the offer shall be properly attached in the respective sections. BHEL shall not be responsible for any missing documents.
- 6.0 No Deviation with respect to tender clauses and no additional clauses/ suggestions/ in Techno-commercial bid/ Price bid shall normally be considered by BHEL. Bidders are requested to positively comply with the same.
- 7.0 BHEL reserves the right to accept or reject any or all Offers without assigning any reasons thereof. BHEL also reserves the right to cancel the Tender wholly or partly without assigning any reason thereof. Also BHEL shall not entertain any correspondence from bidders in this matter (except for the refund of EMD).

8.0 Assessment of Capacity of Bidders:

Bidder's capacity for executing the job under tender shall be assessed 'LOAD' wise and 'PERFORMANCE' wise as per the following:

- I. **LOAD:** Load takes into consideration ALL the contracts of the Bidder under execution with BHEL Regions, irrespective of whether they are similar to the tendered scope or not. The cut off month for reckoning 'Load' shall be the 3rd Month preceding the month corresponding to the 'latest date of bid submission', in the following manner -
(**Note:** For example, if latest bid submission is in Jan 2017, then the 'load' shall be calculated up to and inclusive of Oct 2016)

Total number of Packages in hand = Load (P)

Where 'P' is the sum of all unit wise identified packages (refer table-1) under execution with BHEL Regions as on the cut off month defined above, including packages yet to be commenced, excepting packages which are on Long Hold.

- II. **PERFORMANCE:** Here 'Monthly Performance' of the bidder for all the packages (under execution/ executed during the 'Period of Assessment' in all Power Sector Regions of BHEL) SIMILAR to the packages covered under the tendered scope, excepting packages not commenced shall be taken into consideration. The 'Period of Assessment' shall be 6 months preceding and including the cut off month. The cut off month for reckoning 'Period of Assessment' shall be the 3rd Month preceding the month corresponding to 'latest date of bid submission', in the following manner:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

(Note: For example, if 'latest date of bid submission' is in Jan 2017, then the 'performance' shall be assessed for a 6 months' period up to and inclusive of Oct 2016 (i.e. from May 2016 to Oct 2016), for all the unit wise identified packages (refer Table I))

i). Calculation of Overall 'Performance Rating' for 'Similar Package/Packages' for the tendered scope under execution at Power Sector Regions for the 'Period of Assessment':

This shall be obtained by summing up the 'Monthly Performance Evaluation' scores obtained by the bidder in all Regions for all the similar Package/packages', divided by the total number of Package months for which evaluation should have been done, as per procedure below:

- $P_1, P_2, P_3, P_4, P_5, \dots, P_N$ etc. be the packages (under execution/ executed during the 'Period of Assessment' in all Regions of BHEL) SIMILAR to the packages covered under the tendered scope, excepting packages not commenced. Total number of similar packages for all Regions = P_T (i.e. $P_T = P_1 + P_2 + P_3 + P_4 + \dots + P_N$)
- Number of Months ' T_1 ' for which 'Monthly Performance Evaluation' as per relevant formats, should have been done in the 'Period of Assessment' for the corresponding similar package P_1 . Similarly T_2 for package P_2 , T_3 for package P_3 , etc. for the tendered scope. Now calculate cumulative total months ' T_T ' for total similar Packages ' P_T ' for all Regions (i.e. $T_T = T_1 + T_2 + T_3 + T_4 + \dots + T_N$)
- Sum ' S_1 ' of 'Monthly Performance Evaluation' Scores ($S_{1-1}, S_{1-2}, S_{1-3}, S_{1-4}, S_{1-5}, \dots, S_{1-T_1}$) for similar package P_1 , for the 'period of assessment' ' T_1 ' (i.e. $S_1 = S_{1-1} + S_{1-2} + S_{1-3} + S_{1-4} + S_{1-5} + \dots + S_{1-T_1}$). Similarly, S_2 for package P_2 for period T_2 , S_3 for package P_3 for period T_3 etc. for the tendered scope for all Regions. Now calculate cumulative sum ' S_T ' of 'Monthly Performance Evaluation' Scores for total similar Packages ' P_T ' for all Regions (i.e. ' $S_T = S_1 + S_2 + S_3 + S_4 + S_5 + \dots + S_N$ ')
- Overall Performance Rating ' R_{BHEL} ' for the Similar Package/Packages (under execution/ executed during the 'Period of Assessment') in all the Power Sector Regions of BHEL

$$= \frac{\text{Aggregate of Performance scores for all similar packages in all the Regions}}{\text{Aggregate of months for each of the similar packages for which performance should have been evaluated in all the Regions}}$$

$$= \frac{S_T}{T_T}$$

- Bidders to note that the risk of non-evaluation or non-availability of the 'Monthly Performance Evaluation' reports as per relevant formats is to be borne by the Bidder.

f) Table showing methodology for calculating 'a', 'b' and 'c' above

Sl. No.	Item Description	Details for all Regions							Total
(i)	(ii)	(iii)	(iv)	(v)	(vi)	(vii)	(viii)	(ix)	(x)
1	Similar Packages for all Regions → (under execution/ executed during period of assessment)	P_1	P_2	P_3	P_4	P_5	...	P_N	Total No. of similar packages for all Regions = P_T i.e. Sum (Σ) of columns (iii) to (ix)

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Sl. No.	Item Description	Details for all Regions							Total
(i)	(ii)	(iii)	(iv)	(v)	(vi)	(vii)	(viii)	(ix)	(x)
2	Number of Months for which 'Monthly Performance Evaluation' as per relevant formats should have been done in the 'period of assessment' for corresponding Similar Packages (as in row 1)	T ₁	T ₂	T ₃	T ₄	T ₅	...	T _N	Sum (Σ) of columns (iii) to (ix) = T _T
3	Monthly performance scores for the corresponding period (as in Row 2)	S ₁₋₁ , S ₁₋₂ , S ₁₋₃ , S ₁₋₄ , ...	S ₂₋₁ , S ₂₋₂ , S ₂₋₃ , S ₂₋₄ , ...	S ₃₋₁ , S ₃₋₂ , S ₃₋₃ , S ₃₋₄ , ...	S ₄₋₁ , S ₄₋₂ , S ₄₋₃ , S ₄₋₄ , ...	S ₅₋₁ , S ₅₋₂ , S ₅₋₃ , S ₅₋₄ , ...		S _{N-1} , S _{N-2} , S _{N-3} , S _{N-4} , ...	-----
4	Sum of Monthly Performance scores of the corresponding Package for the corresponding period (as in row-3)	S ₁	S ₂	S ₃	S ₄	S ₅	...	S _N	Sum (Σ) of columns (iii) to (ix) = S _T

- ii). Calculation of Overall 'Performance Rating' (R_{BHEL}) in case at least 6 evaluation scores for 'similar Package/Packages' for the tendered scope ARE NOT AVAILABLE, during the 'Period of Assessment':

This shall be obtained by summing up the 'Monthly Performance Evaluation' scores obtained by the bidder in all Regions for ALL the packages, divided by the total number of Package months for which evaluation should have been done. 'R_{BHEL}' shall be calculated subject to availability of 'performance scores' for at least 6 'package months' in the order of precedence below:

- 'Period of Assessment' i.e. 6 months preceding and including the cut-off month
- 12 months preceding and including the cut-off month
- 24 months preceding and including the cut-off month

In case, R_{BHEL} cannot be calculated as above, then Bidder shall be treated as 'NEW VENDOR'. Further eligibility and qualification of this bidder shall be as per definition of 'NEW VENDOR' described in 'Explanatory Notes'.

- iii). Factor "L" assigned based on Overall Performance Rating (R_{BHEL}) at Power Sector Regions:

Sl. no.	Overall Performance Rating (R _{BHEL})	Corresponding value of 'L'
1	=60	NA
2	> 60 and ≤ 65	0.4
3	> 65 and ≤ 70	0.35
4	> 70 and ≤ 75	0.25
5	> 75 and < 80	0.2
6	≥ 80	NA

III. 'Assessment of Capacity of Bidder':

'Assessment of Capacity of Bidder' is based on the Maximum number of packages for which a vendor is eligible, considering the performance scores of similar packages, as below:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)	
POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091	
फैक्स/Fax : (033) 23211960	फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Max number of packages $P_{Max} = (R_{BHEL} - 60)$ divided by corresponding value of 'L', i.e. $(R_{BHEL} - 60)/L$

Note:

- In case the value of P_{Max} results in a fraction, the value of P_{Max} is to be rounded off to next whole number
- For $R_{BHEL} = 60$, $P_{Max} = '1'$
- For $R_{BHEL} \geq 80$, there will be no upper limit on P_{Max}

The Bidder shall be considered 'Qualified' as per 'Assessment of Capacity of Bidder' for the subject Tender if $P \leq P_{Max}$

(Where P is calculated as per clause 'I' above)

Note: For the transition period of 1 year (i.e. for all the NITs floated between 11th May 2019 to 10th May 2020), in addition to above, 'Assessment of Capacity of Bidder' shall also be calculated considering 'performance scores' till 36 months as per Sl. no II ii).

Higher of the results obtained out of both shall be considered for 'Assessment of Capacity of Bidder'.

IV. Explanatory note:

- Similar package means Boiler or ESP or Piping or Turbine or Civil or Structure or Electrical or C&I etc. at the individual level irrespective of rating of Plant and irrespective of whether the subject tender is a single package or as part of combined/composite packages. Normally Boiler, ESP, Piping, Turbine, Electrical, C&I, Civil, Structure etc. is considered individual level of package. For example, in case the tendered scope is a Boiler Vertical Package comprising of Boiler, ESP and Power Cycle Piping (i.e. the 'identified packages as per Table-1 below), the 'PERFORMANCE' part against sl.no. II above, needs to be evaluated considering all the identified packages (i.e. Boiler, ESP and Power Cycle Piping) and finally the Bidder's capacity to execute the tendered scope is assessed in line with III above.

ii). Identified Packages (Unit wise)

Table-1

Civil	Electrical and C&I	Mechanical
i). Enabling works ii). Pile and Pile Caps iii). Civil Works including foundations iv). Structural Steel Fabrication & Erection v). Chimney vi). Cooling Tower vii). Others (Civil)	i). Electrical ii). C&I iii). Others (Elect. and C&I)	i). Boiler & Aux (All types including CW Piping if applicable) ii). Power Cycle Piping/Critical Piping iii). ESP iv). LP Piping v). Steam Turbine Generator set & Aux vi). Gas Turbine Generator set & Aux vii). Hydro Turbine Generator set & Aux viii). Turbo Blower (including Steam Turbine) ix). Material Management x). Others (Mechanical)

- Bidders who have not been evaluated for at least six package months in the last 24 months preceding and including the Cut-off month in the online BHEL system for contractor performance evaluation in BHEL PS Regions, shall be considered "NEW VENDOR".

A 'NEW VENDOR' shall be considered qualified subject to satisfying all other tender conditions.

A 'NEW VENDOR' if awarded a job (of package/packages identified under this clause) shall be tagged as "FIRST TIMER" on the date of first LOI from BHEL.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

The "FIRST TIMER" tag shall remain till completion of all the contracts against which vendor has been tagged as First Timer or availability of 6 evaluation scores within last 24 months preceding and including the Cut-off month in the online BHEL system for contractor performance evaluation in BHEL PS Regions.

A Bidder shall not be eligible for the next job as long as the Bidder is tagged as "FIRST TIMER" excepting for the Tenders which have been opened on or before the date of the bidder being tagged as 'FIRST TIMER'.

After removal of 'FIRST TIMER' tag, the Bidder shall be considered 'QUALIFIED' for the future tenders subject to satisfying all other tender conditions including 'Assessment of Capacity of Bidders'.

- iv). Consequent upon applying the criteria of 'Assessment of Capacity of Bidders' detailed above on all the bidders qualified against Technical and Financial Qualification criteria, if the number of qualified bidders reduces to less than four, then for further processing of the Tender, BHEL at its discretion reserves the right to also consider the bidders who are "not qualified" as per criteria of 'Assessment of Capacity of Bidders' and for this, procedure described in following three options shall be followed:
- All the bidders having Overall Performance Rating (R_{BHEL}) ≥ 60 shall be considered qualified against criteria of 'Assessment of Capacity of Bidders'.
 - If even after using option "a", the number of qualified bidders remains less than four, then in addition to bidders considered as per option "a", "First timer" bidders having average of available performance scores ≥ 60 upto and including the Cut Off month shall also be considered qualified against criteria of 'Assessment of Capacity of Bidders'.
 - If even after using option "a" and "b", the number of qualified bidders remains less than four, then in addition to bidders considered as per option "a" and "b", "First timer" bidders for whom no performance score is available in the system upto and including the Cut Off month, shall also be considered qualified against criteria of 'Assessment of Capacity of Bidders'.

Note:- In case, the number of bidders qualified against Technical and Financial Qualification criteria itself is less than four, then all bidders (a)- having Overall Performance Rating (R_{BHEL}) ≥ 60 , (b)- "First timer" bidders having average of available performance scores ≥ 60 upto and including the Cut Off month, (c)- "First timer" bidders for whom no performance score is available in the system upto and including the Cut Off month, shall be considered qualified against criteria of 'Assessment of Capacity of Bidders' for further processing of tender.

- v). 'Under execution' shall mean works in progress as per the following:
- Up to execution of 90% of anticipated Contract Value in case of Civil, MM, Structural and Turbo Blower Packages
 - Up to Steam Blowing in case of Boiler/ESP/Piping Packages
 - Up to Synchronization in all Balance Packages

Note: BHEL at its discretion can extend (or reduce in exceptional cases in line with Contract conditions) the period defined against (a), (b) and (c) above, depending upon the balance scope of work to be completed.

- vi). Contractor shall provide the latest contact details i.e. mail-ID and Correspondence Address to SCT Department, so that same can be entered in the Contractor Performance Evaluation System, and in case of any change/discrepancy same shall be informed immediately. Login Details for viewing scores in Contractor Performance Evaluation System shall be provided to the Contractor by SCT Department.
- vii). Performance Evaluation for Activity Month shall be completed in Evaluation Month (i.e. month next to Activity Month) or in rare cases in Post Evaluation Month (i.e. month next to Evaluation Month) after approval from Competent Authority. In case scores are not acceptable, Contractor can submit Review Request to GM Site/ GM Project latest by 25th of Evaluation Month or 3 days after approval of score, whichever is later. However, acceptance/rejection of 'Review Request' solely depends on the discretion

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

of GM Site/GM Project. After acceptance of Review Request, evaluation score shall be reviewed at site and the score after completion of review process shall be acceptable and binding on the contractor.

- viii). Project on Hold due to reasons not attributable to bidder -
 - a. Short hold: Evaluation shall not be applicable for this period, however Loading will be considered.
 - b. Long hold: Short hold for continuous six months and beyond or hold on account of Force Majeure shall be considered as Long Hold. Evaluation as well as Loading shall not be considered for this period.
- ix). Performance evaluation in CL 8 above is applicable to Prime bidder and Consortium partner (or Technical tie up partner) for their respective scope of work.

- 9.0 Since the job shall be executed at site, bidders must visit site/ work area and study the job content, facilities available, availability of materials, prevailing site conditions including law & order situation, applicable wage structure, wage rules, etc before quoting for this tender. They may also consult this office before submitting their offers, for any clarifications regarding scope of work, facilities available at sites or on terms and conditions.
- 10.0 For any clarification on the tender document, the bidder may seek the same in writing, through e-mail or through E-Procurement Site <https://bhel.abcprocure.com>, as per specified format, within the scheduled date for seeking clarification, from the office of the undersigned. BHEL shall not be responsible for receipt of queries after due date of seeking clarification due to any delay. Any clarification / query received after last date for seeking clarification may not be normally entertained by BHEL and no time extension will be given.
- 11.0 BHEL may decide holding of pre-bid discussion [PBD] with all intending bidders as per date indicated in the NIT. The bidder shall ensure participation for the same at the appointed time, date and place as may be decided by BHEL. Bidders shall plan their visit accordingly. The outcome of pre-bid discussion (PBD) shall also form part of tender.
- 12.0 In the event of any conflict between requirement of any clause of this specification/ documents/drawings/data sheets etc or requirements of different codes/standards specified, the same to be brought to the knowledge of BHEL in writing for clarification before due date of seeking clarification (whichever is applicable), otherwise, interpretation by BHEL shall prevail. Any typing error/missing pages/ other clerical errors in the tender documents, noticed must be pointed out before pre-bid meeting/submission of offer else BHEL's interpretation shall prevail.
- 13.0 Unless specifically mentioned otherwise, bidder's quoted price shall deemed to be in compliance with tender including PBD.
- 14.0 Bidders shall submit Integrity Pact Agreement (Duly signed by authorized signatory who signs in the offer), along with techno - commercial bid. This pact shall be considered as a preliminary qualification for further participation. The names and other details of Independent External Monitor (IEM) for the subject tender is as given at point (xi) of 1 above.
- 15.0 The Bidder has to satisfy the Pre Qualifying Requirements stipulated for this Tender in order to be qualified. The Price Bids of only those bidders will be opened who will be qualified for the subject job on the basis of satisfying the Pre Qualification Criteria specified in this NIT as per Annexure-1 (as applicable), past performance etc. and date of opening of price bids shall be intimated to only such bidders. BHEL reserves the right not to consider offers of parties under HOLD.
- 16.0 In case BHEL decides on a 'Public Opening', the date & time of opening of the PRICE BID shall be intimated to the qualified bidders and in such as case, price bid (Volume-III) uploaded in E-procurement Site <https://bhel.abcprocure.com> will be opened.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- 17.0 Validity of the offer shall be for six months from the latest due date of offer submission (including extension, if any) unless specified otherwise.
- 18.0 BHEL reserves the right to go for Reverse Auction (RA) (Guidelines as available on www.bhel.com) instead of opening the sealed envelope price bid, submitted by the bidder. This will be decided after techno-commercial evaluation. Bidders to give their acceptance with the offer for participation in RA. Non-acceptance to participate in RA may result in non-consideration of their bids, in case BHEL decides to go for RA.

However, if reverse auction process is not adopted or is unsuccessful for whatsoever reason, absolute value price bid (Volume-III) uploaded in E-Procurement Site <https://bhel.abcpocure.com> will be opened for deciding the successful bidder. BHEL's decision in this regard will be final & binding on bidder.

Those bidders who have given their acceptance to participate in Reverse Auction will have to necessarily submit 'Process compliance form' (to the designated service provider) as well as 'Online sealed bid' in the Reverse Auction. Non-submission of 'Process compliance form' or 'Online sealed bid' by the agreed bidder(s) will be considered as tampering of the tender process and will invite action by BHEL as per extant guidelines for suspension of business dealings with suppliers/ contractors (as available on www.bhel.com).

The bidders have to necessarily submit online sealed bid less than or equal to their envelope sealed price bid already submitted to BHEL along with the offer. The envelope sealed price bid of successful L 1 bidder in RA, if conducted, shall also be opened after RA and the order will be placed on lower of the two bids (RA closing price & envelope sealed price) thus obtained. The bidder having submitted this offer specifically agrees to this condition and undertakes to execute the contract on thus awarded rates.

If it is found that L 1 bidder has quoted higher in online seal bid in comparison to envelope sealed bid for any item(s), the bidder will be issued a warning letter to this effect. However, if the same bidder again defaults on this count in any subsequent tender in the unit, it will be considered as fraud and will invite action by BHEL as per extant guidelines for suspension of business dealings with suppliers/ contractors (as available on www.bhel.com).

As a reminder to the bidders, system will flash following message (in Red Color) during the course of 'online sealed bid':

"Bidders to submit online sealed bid less than or equal to their envelope sealed bid already submitted to BHEL"

In case BHEL decides to go for reverse auction, the H1 bidder (whose quote is highest in online sealed bid) may not be allowed to participate in further RA process.

- 19.0 On submission of offer, further consideration will be subject to compliance to tender & qualifying requirement and customer's acceptance, as applicable.
- 20.0 In case the bidder is an "Indian Agent of Foreign Principals", 'Agency agreement has to be submitted along with Bid, detailing the role of the agent along with the terms of payment for agency commission in INR, along with supporting documents.
- 21.0 The bidders shall not enter into any undisclosed M.O.U. or any understanding amongst themselves with respect to tender.
- 22.0 Consortium Bidding (or Technical Tie up) shall be allowed only if specified in Pre Qualifying Requirement (PQR) criteria, and in such a case the details to be complied with is enclosed herewith as per Annexure-5 UNLESS SPECIFIED OTHERWISE IN PQR.
- 23.0 The bidder shall submit documents in support of possession of 'Qualifying Requirements' duly self certified and stamped/ digitally signed (as applicable) by the authorized signatory, indexed and properly linked in the format for PQR. In case BHEL requires any other documents/proofs, these shall be submitted immediately.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- 24.0 The bidder may have to produce original document for verification if so decided by BHEL.
- 25.0 The offers of the bidders who are on the banned list as also the offer of the bidders, who engage the services of the banned firms, shall be rejected. The list of banned firms is available on BHEL Website (www.bhel.com).

l) Integrity commitment, performance of the contract and punitive action thereof:

a) Commitment by BHEL:

BHEL commits to take all measures necessary to prevent corruption in connection with the tender process and execution of the contract. BHEL will during the tender process treat all Bidder(s) in a transparent and fair manner, and with equity.

b) Commitment by Bidder/ Supplier/ Contractor:

b.i) The bidder/ supplier/ contractor commit to take all measures to prevent corruption and will not directly or indirectly influence any decision or benefit which he is not legally entitled to nor will act or omit in any manner which tantamount to an offence punishable under any provision of the Indian Penal Code, 1860 or any other law in force in India.

b.ii) The bidder/ supplier/ contractor will, when presenting his bid, disclose any and all payments he has made, and is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract and shall adhere to relevant guidelines issued from time to time by Govt. of India/ BHEL.

b.iii) The bidder/ supplier/ contractor will perform/ execute the contract as per the contract terms & conditions and will not default without any reasonable cause, which causes loss of business/ money/ reputation, to BHEL.

If any bidder/ supplier/ contractor during pre-tendering/ tendering/ post tendering/ award/ execution/ post-execution stage includes in mal-practices, cheating, bribery, fraud or and other misconduct or formation of cartel so as to influence the bidding process or influence the price or acts or omits in any manner which tantamount to an offence punishable under any provision of the Indian Penal code, 1860 or any other law in force in India, then, action may be taken against such bidder/ supplier/ contractor as per extant guidelines of the company available on www.bhel.com and/ or under applicable legal provisions.

- 26.0 It may please be noted that Guidelines/Rules in respect of Suspension of business dealings (Hold- 12 to 24 Months/ Banning – 3 years etc), Vendor Evaluation formats, quality, safety and HSE guidelines, standard T&P hire charges of BHEL etc may undergo change from time to time and the latest one shall be followed. Latest "Guidelines for Vendor Evaluation" is web based, quality, safety & HSE"; standard T&P hire charges shall be available at site and shall be given to the successful vendors/ subcontractors during execution.
- 27.0 MSE suppliers can avail the intended benefits in respect of the procurements related to the Goods and Services only (Definition of Goods and Services as enumerated by Govt. of India vide Office Memorandum F. No. 21(8)/2011-MA dtd. 09/11/2016 office of AS & DC, MSME) if they submit along with the offer, attested copies of either EM II certificate having deemed validity (five years from the date of issue of acknowledgement in EM II) or valid NSIC certificate or Udyog Aadhar Memorandum (UAM) & Acknowledgement or EM II certificate along with attested copy of a CA certificate (Format enclosed at Annexure – C where deemed validity of EM II certificate of five years has expired) applicable for the relevant financial year (latest audited). Date to be reckoned for determining the deemed validity will be the date of bid opening (Part 1 in case of two part bid). Non submission of such documents will lead to consideration of their bid at par with other bidders. No benefit shall be applicable for this enquiry if any deficiency in the above required documents are not submitted before price bid opening. If the tender is to be submitted through e-procurement portal, then the above required documents are to be uploaded on the portal. Documents should be notarized or attested by a Gazetted officer.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Any Bidder falling under MSME category, shall furnish the following details & submit documentary evidence/Govt. Certificate etc. in support of the same along with their techno-commercial offer: -

Type under MSME	SC/ST owned	Women owned	Others
Micro			
Small			
Medium			

Note: - If the bidder does not furnish the above, offer shall be processed construing that the bidder is not falling under MSME category.

- 28.0 The bidder along with its associates/collaborators/sub-contractors/sub-vendors/consultants/service providers shall strictly adhere to BHEL Fraud Prevention Policy displayed on BHEL website www.bhel.com and shall immediately bring to the notice of BHEL Management about any fraud or suspected fraud as soon as it comes to their notice.
- 29.0 Annexure-A -Amendment to GCC/SCC shall be read in conjunction with GCC-Volume-IB & SCC-Volume-ID. This Annexure-A (Amendment to GCC/SCC) of NIT shall not be considered as part of the NIT but addendum/corrigendum to the GCC/SCC only.
- 30.0 Annexure-B - Terms & conditions of Reverse Auction is enclosed herewith.
- 31.0 Annexure-D – Specific Clause w.r.t. BOCW Act & Cess Act is enclosed herewith.
- 32.0 Annexure-E- Statewise GST Registration nos. is enclosed herewith.
- 33.0 Duly filled & signed Annexure- CPP-GST/I to be submitted by bidders along with their techno-commercial offer.
- 34.0 Integrity Pact (IP) –

(a) IP is a tool to ensure that activities and transactions between the Company and its Bidders/ Contractors are handled in a fair, transparent and corruption free manner. Following Independent External Monitors (IEMs) on the present panel have been appointed by BHEL with the approval of CVC to oversee implementation of IP in BHEL.

Sl	IEM	Address	Email
1.	Shri Arun Chandra Verma, IPS (Retd.)	Flat No. C -1204, C Tower, Amrapali, Platinum Complex, Sector 119, Noida (U.P.)	acverma1@gmail.com
2.	Shri Virendra Bahadur Singh, IPS (Retd.)	H. No. B-5/64, Vineet Khand, Gomti Nagar, Lucknow – 226010	vbsinghips@gmail.com

- (b) The IP as enclosed with the tender is to be submitted (duly signed by authorized signatory) along with techno-commercial bid (Part-I, in case of two/three part bid). Only those bidders who have entered into such an IP with BHEL would be competent to participate in the bidding. In other words, entering into this Pact would be a preliminary qualification.
- (c) Please refer Section-8 of IP for Role and Responsibilities of IEMs. In case of any complaint arising out of the tendering process, the matter may be referred to any of the above IEM(s). All correspondence with the IEMs shall be done through email only.

Note:

No routine correspondence shall be addressed to the IEM (phone/ post/ email) regarding the clarifications, time extensions or any other administrative queries, etc. on the tender issued. All such clarification/ issues shall be addressed directly to the tender issuing (procurement) department's officials whose contact details are provided below:

Details of contact person(s):

Name	Aditya Kumar	Subrata Sen
Dept	SCT Dept, BHEL PSER, Kolkata	SCT Dept, BHEL PSER, Kolkata
Address	DJ-9/1, Sector – II, Salt Lake, Kolkata – 700091	DJ-9/1, Sector – II, Salt Lake, Kolkata – 700091
Phone	033-2339 8237	033-2339 8226
Email	aditya.kr@bhel.in	subrata.sen@bhel.in
FAX	033-2321 1960	033-2321 1960

35.0 For this procurement, Public Procurement (Preference to Make in India), Order 2017 dated 15.06.2017 & 28.05.2018 and subsequent Orders issued by the respective Nodal Ministry shall be applicable even if issued after issue of this NIT but before finalization of contract/ PO/ WO against this NIT.

In the event of any Nodal Ministry prescribing higher or lower percentage of purchase preference and/ or local content in respect of this procurement, same shall be applicable.

36.0 Bidders are requested to submit their best price as per latest price schedule of the tender.

37.0 It may please be noted that Bid should be free from correction, overwriting, using corrective fluid, etc. Any interlineation, cutting, erasure or overwriting shall be valid only if they are attested under full signature(s) of person(s) signing the bid, else bid shall be liable for rejection.

All overwriting/ cutting, etc will be numbered by bid opening officials and announced during bid opening.

38.0 Order of Precedence

In the event of any ambiguity or conflict between the Tender Documents, the order of precedence shall be in the order below:

- Amendments/Clarifications/Corrigenda/Errata etc issued in respect of the tender documents by BHEL
- Notice Inviting Tender (NIT)
- Price Bid-Volume-III
- Technical Conditions of Contract (TCC) -- Volume-IF
- Special Conditions of Contract (SCC) —Volume-ID
- General Conditions of Contract (GCC) —Volume-IB
- Forms and Procedures —Volume-IE

for BHARAT HEAVY ELECTRICALS LTD

Sr. Engr (SCT)

Agency	Contact details	
BHEL, PSER, Kolkata	Address	DJ-9/1, Sector – II, Salt Lake, Kolkata – 700 091
	Phone no	033-2339 8231/8236/8000
	FAX no	033-23211960
	E-mail	papori@bhel.in / anupriya.mundu@bhel.in / subrata.sen@bhel.in

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Enclosure

01. Annexure-1: Pre Qualification Criteria.
02. Annexure-2: Format for No Deviation Certificate.
03. Annexure-3: Format for seeking clarification.
04. Annexure-4: Check List.
05. Annexure-5: Conditions for consortium/tie up.
06. Annexure –A- Amendment to GCC/SCC.
07. Annexure -B- Terms & conditions of Reverse Auction.
08. Annexure –C- CA certificate Format.
09. Annexure-D – Specific Clause w.r.t. BOCW Act & Cess Act.
10. Annexure-E- Statewise GST Registration nos.
11. Annexure– CPP-GST/I.
12. Integrity Pact Agreement Format (Separate).
13. Other Tender documents as per this NIT.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE-1PRE QUALIFICATION CRITERIA

JOB	LEVELLING GRADING, PILING WORK INCLUDING TESTING OF PILES AND OTHER ASSOCIATED WORKS ETC. OF FGD SYSTEM FOR 3x660 MW NPGCL NABINAGAR TPP, BIHAR.
TENDER NO	PSER:SCT:NBN-C2027:20

SL NO.	CRITERIA
A	
1.0 (a)	BIDDER SHOULD HAVE AVERAGE MINIMUM ANNUAL FINANCIAL TURNOVER OF INR 3.90 CRORES DURING THE LAST 3 (THREE) YEARS, ENDING ON 31-03-2019 OR CORRESPONDING FINANCIAL YEAR FOLLOWED BY THE BIDDER AND HAVING POSITIVE NET WORTH AS ON LATEST AUDITED ACCOUNTS AS SUBMITTED FOR PARA 1(C).
(b)	BIDDER MUST HAVE EARNED PROFIT IN ANY ONE OF THE LAST THREE FINANCIAL YEARS ENDING ON 31-03-2019 OR CORRESPONDING FINANCIAL YEAR FOLLOWED BY THE BIDDER. AUDITED BALANCE SHEET AND PROFIT & LOSS ACCOUNT OF THE COMPANY FOR LAST 3 (THREE) FINANCIAL YEARS, ENDING ON 31-03-2019 OR CORRESPONDING FINANCIAL YEAR FOLLOWED BY THE BIDDER NEED TO BE SUBMITTED IN SUPPORT OF ABOVE.
(c)	IN CASE AUDITED BALANCE SHEET AND PROFIT AND LOSS ACCOUNT HAS NOT BEEN SUBMITTED FOR ALL THREE YEARS INDICATED ABOVE THEN THE APPLICABLE FINANCIAL AUDITED STATEMENTS SUBMITTED BY THE BIDDERS AGAINST THE REQUISITE THREE YEARS WILL BE AVERAGED FOR THREE YEARS.
(d)	IF FINANCIAL STATEMENTS ARE NOT REQUIRED TO BE AUDITED STATUTORILY, THEN INSTEAD OF AUDITED FINANCIAL STATEMENTS, FINANCIAL STATEMENTS ARE REQUIRED TO BE CERTIFIED BY CHARTERED ACCOUNTANT.
2.1	BIDDER SHOULD HAVE EXECUTED PILING OR CIVIL OR STRUCTURE OR 'CIVIL AND STRUCTURAL WORKS' OR RCC CHIMNEY OR RCC COOLING TOWER OR RCC SILO OR MILL BUNKER OR ANY COMBINATION OF THESE DURING THE LAST 7 (SEVEN) YEARS, ENDING ON THE LATEST DATE OF BID SUBMISSION, VALUE OF WHICH SHOULD NOT BE LESS THAN EITHER OF THE FOLLOWING: A) 1 (SINGLE) WORK OF VALUE NOT LESS THAN Rs. 10.40 CRORES OR B) 2 (TWO) WORKS OF VALUE NOT LESS THAN Rs. 6.50 CRORES EACH OR C) 3 (THREE) WORKS OF VALUE NOT LESS THAN Rs. 5.20 CRORES EACH RELEVANT DOCUMENT IN SUPPORT OF ABOVE SHALL BE SUBMITTED.
2.2	BIDDER SHOULD HAVE EXECUTED 'RCC CAST-IN-SITU DRIVEN PILES' OR 'RCC CAST-IN-SITU BORED PILES' OR 'PRE-CAST PILES AND ITS INSTALLATION AT SITE' OR ANY COMBINATION OF THESE WITH THE FOLLOWING QUANTITY IN EACH CASE DURING LAST 7 (SEVEN) YEARS, ENDING ON THE LATEST DUE DATE OF SUBMISSION OF OFFER, i) AT LEAST 44777 RM IN CUMULATIVE OF TWO RUNNING/ COMPLETED CONTRACTS WITHIN A COMMON PERIOD OF TWELVE CONSECUTIVE MONTHS OR ii) AT LEAST 29852 RM WITHIN A PERIOD OF TWELVE CONSECUTIVE MONTHS IN ONE RUNNING/COMPLETED CONTRACT. RELEVANT DOCUMENT IN SUPPORT OF ABOVE SHALL BE SUBMITTED.
3.0	BIDDER SHOULD HAVE VALID PAN. RELEVANT DOCUMENT IN SUPPORT OF ABOVE SHALL BE SUBMITTED.
4.0	CONSORTIUM/JV BIDDING IS NOT ALLOWED.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

B	GENERAL
1.0	'EXECUTED' MEANS BIDDER SHOULD HAVE ACHIEVED THE CRITERIA SPECIFIED ABOVE EVEN IF THE CONTRACT HAS NOT BEEN COMPLETED OR CLOSED.
2.0	BIDDER SHOULD FURNISH INFORMATION REGARDING PROJECTS IN HAND, CURRENT LITIGATION, ORDERS REGARDING EXCLUSION/ EXPULSION OR BLACK LISTING.
3.0	AFTER SATISFACTORY FULFILLMENT OF ALL THE ABOVE CRITERIA, OFFER SHALL BE CONSIDERED FOR FURTHER EVALUATION AS PER NIT AND ALL OTHER TERMS OF THE TENDER SUBJECT TO CUSTOMER'S APPROVAL.
4.0	BIDDER MUST NOT BE UNDER BANKRUPTCY CODE PROCEEDINGS (IBC) BY NCLT OR UNDER LIQUIDATION / BIFR, WHICH WILL RENDER HIM INELIGIBLE FOR PARTICIPATION IN THIS TENDER, AND SHALL SUBMIT UNDERTAKING TO THIS EFFECT.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Explanatory Notes for the PQR (unless otherwise specified in the PQR):

1. Bidder to submit Audited Balance Sheet and Profit and Loss Account for the respective years as indicated along with all annexures.
2. In case audited Financial statements have not been submitted for all the three years as indicated, then the applicable audited statements submitted by the bidders against the requisite three years, will be averaged for three years i.e total divided by three.
3. NETWORTH : Shall be calculated based on the latest Audited Accounts as furnished. Net worth = Paid up share capital + Reserves. (Net worth is required to be evaluated in case of companies)
4. PROFIT : shall be NET profit (PAT + Non cash expenditure viz depreciation) earned during any one of the three financial years.
5. 'Additional' Criteria in respect of 'Technical' criteria of PQR for Civil, Electrical, CI, unless otherwise specified:
 - i) 'Similar' work means
 - a. Piling or Civil or Structure or 'Civil and Structural works' or RCC Chimney or RCC Cooling Tower or RCC Silo or Mill Bunker or any combination of these shall be considered similar works for all packages mentioned under 'CIVIL WORKS'
 - b. Electrical or C&I or 'Electrical and C&I' shall be considered similar works for all packages mentioned under 'ELECTRICAL AND C&I WORKS'
6. Completion date for achievement of the 'Technical' criteria of PQR will be the last 7 years ending on the 'latest date of Bid submission' of Tender irrespective of date of the start of work
7. 'EXECUTED' means the bidder should have achieved the criteria specified in the Technical criteria of PQR even if the Contract has not been completed or closed
8. Unless otherwise specified, for the purpose of 'Technical' criteria of PQR, the word 'EXECUTED' means achievement of milestones as defined below:
 - a. "ACHIEVEMENT OF PHYSICAL QUANTITIES" as per respective PQRs.
 - b. "READINESS FOR COAL FILLING" in respect of Mill Bunker.
 - c. "CHARGING" in respect of Power Transformers / Bus Ducts / "HT/LT Switchgears" / "HT / LT Cabling".
 - d. For C&I works: "SYNCHRONISATION" in case of power project and "WORK COMPLETION of the value as defined in PQR" in case of industry.
 - e. "BOILER LIGHT UP" in respect of Boiler / CFBC / ESP.
 - f. "GAS IN" in respect of HRSG.
 - g. "STEAM BLOWING COMPLETION" in respect of Power Cycle Piping.
 - h. "HYDRAULIC TEST" of the system in respect of Pressure parts / LP Piping / CW Piping.
 - i. "FULL LOAD OPERATION OF THE UNIT" in respect of Insulation work.
 - j. "SYNCHRONISATION" in respect of STG / GTG.
 - k. "SPINNING" in respect of HTG.
 - l. "COMPLETION AND HANDING OVER FOR MECHANICAL ERECTION" in respect of STG Deck and Machine/Equipment foundation.
9. Boiler means HRSG or WHRB or any other types of Steam Generator
10. Power Cycle piping means Main Steam, Hot Reheat, Cold Reheat, HP Bypass
11. For the purpose of evaluation of the PQR, one MW shall be considered equivalent to 3.5TPH where ever rating of HRSG/BOILER is mentioned in MW. Similarly, where ever rating of Gas Turbine is mentioned in terms of Frame size, ISO rating in terms of MW shall be considered for evaluation.
12. In case the experience/PO/WO certificate enclosed by bidders do not have separate break up prices for the E&C portion of Electrical and CI Works, (i.e. the certificates enclosed are for composite order for supply and erection of Electrical & CI and other works if any), then value of Erection and Commissioning for the Electrical & CI portion shall be considered as 15% of the supply & erection of Electrical & CI, unless otherwise specifically indicated in the PQR.
13. Scope for capital overhaul of STG shall cover Bearing Inspection work and overhauling of all cylinders of the Turbine.
14. In case the tendered scope is not a Pulverised Fuel Boiler, experience of Oil/Gas Fired Boilers also can be considered.
15. Value of work is to be updated with indices for "All India Avg. Consumer Price index for industrial workers" and "Monthly Whole Sale Price Index for All Commodities" with base month as per last month of work execution and indexed up to three (3) months prior to the month of latest due date of bid submission as per following formula-

$$P = R + 0.425 \times R \times \frac{(X_N - X_0)}{X_0} + 0.425 \times R \times \frac{(Y_N - Y_0)}{Y_0}$$

Where

P = Updated value of work

R = Value of executed work

X_N = All India Avg. Consumer Price index for industrial workers for three months prior to the month of latest due date of bid submission (e.g. If latest bid submission date is 02-Mar-17, then bid submission month shall be reckoned as March'17 and index for Dec'2016 shall be considered).

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

X_0 = All India Avg. Consumer Price index for industrial workers for last month of work execution

Y_N = Monthly Whole Sale Price Index for All Commodities for three months prior to the month of latest due date of bid submission (e.g. If latest bid submission date is 02-Mar-17, then bid submission month shall be reckoned as March'17 and index for Dec'2016 shall be considered).

Y_0 = Monthly Whole Sale Price Index for All Commodities for last month of work execution

16. PROFIT shall be PBT earned during any one year of last three financial years as mentioned in PQR.

17. For evaluation of PQR, the credentials of the Bidder alone, and not that of the Group Company shall be considered.

18. "Executed" means the bidder should have achieved the criteria specified in the PQR even if the Contract has not been completed or closed.

19. Bidder must not be under Bankruptcy Code Proceedings (IBC) by NCLT or under Liquidation / BIFR, which will render him ineligible for participation in this tender, and shall submit undertaking to this effect.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE - 2**FORMAT FOR NO DEVIATION CERTIFICATE**
(To be submitted in the bidder's letter head)

BHARAT HEAVY ELECTRICALS LIMITED,
Power Sector - Eastern Region,
Plot no 9/1, DJ Block, Sector – II, Salt Lake City,
Kolkata – 700 091

Sub	No Deviation Certificate.	
Job	Levelling Grading, Piling work including testing of piles and other associated works etc. of FGD system for 3x660MW NPGCL Nabinagar TPP, Bihar.	
Ref	1.0	Tender no PSER:SCT:NBN-C2027:20
	2.0	BHEL's NIT, vide reference no Ref: PSER:SCT:NBN-C2027:7869, Date: 21-02-2020.
	3.0	All other pertinent issues till date.

Dear Sirs,

With reference to above, this is to confirm that as per tender conditions, we have visited site before submission of our offer and noted the job content & site conditions etc. We also confirm that we have not changed/ modified the tender documents as appeared in the website/ issued by you and in case of such observance at any stage, it shall be treated as null and void.

We hereby confirm that we have not taken any deviation from tender clauses together with other references as enumerated in the above referred NIT. We hereby confirm our unqualified acceptance to all terms & conditions, unqualified compliance to technical specification, integrity pact (if applicable) and acceptance to reverse auctioning process.

In the event of observance of any deviation in any part of our offer at a later date whether implicit or explicit, the deviations shall stand null & void.

We confirm to have submitted/uploaded offer/documents in accordance with tender instructions with acceptance of the terms & conditions of the tender by us and as per aforesaid references.

Thanking you,

Yours faithfully,

(Signature, date & seal of authorized
representative of the bidder)

ANNEXURE - 3**FORMAT FOR SEEKING CLARIFICATION**

JOB	Levelling Grading, Piling work including testing of piles and other associated works etc. of FGD system for 3x660MW NPGCL Nabinagar TPP, Bihar.
TENDER NO	PSER:SCT:NBH-C2027:20

SI no	Reference clause of tender document	Existing provision	Bidder's query	BHEL's clarification

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

ANNEXURE - 4**CHECK LIST**

NOTE:- Tenderers are required to fill in the following details and no column should be left blank

1	Name and Address of the Tenderer		
2	Details about type of the Firm/Company		
3.a	Details of Contact person for this Tender	Name : Mr/Ms Designation: Telephone No: Mobile No: Email ID: Fax No:	
3.b	Details of alternate Contact person for this Tender	Name : Mr/Ms Designation: Telephone No: Mobile No: Email ID: Fax No:	
4	EMD DETAILS	DD No: Date : Bank : Amount: Please tick (✓) whichever applicable:- ONE TIME EMD / ONLY FOR THIS TENDER	
5	Validity of Offer	TO BE VALID FOR SIX MONTHS FROM DUE DATE	
		APPLICABILITY(BY BHEL)	ENCLOSED BY BIDDER
6	Whether the format for compliance with PRE QUALIFICATION CRITERIA (ANNEXURE-I) is understood and filled with proper supporting documents referenced in the specified format	Applicable	YES / NO
7	Audited profit and Loss Account for the last three years	Applicable/Not Applicable	YES/NO
8	Copy of PAN Card	Applicable/Not Applicable	YES/NO
9	Whether all pages of the Tender documents including annexures, appendices etc are read understood and signed	Applicable/Not Applicable	YES/NO
10	Integrity Pact	Applicable/Not Applicable	YES/NO
11	Declaration by Authorised Signatory	Applicable/Not Applicable	YES/NO
12	No Deviation Certificate	Applicable/Not Applicable	YES/NO
13	Declaration confirming knowledge about Site Conditions	Applicable/Not Applicable	YES/NO
14	Declaration for relation in BHEL	Applicable/Not Applicable	YES/NO
15	Non Disclosure Certificate	Applicable/Not Applicable	YES/NO
16	Bank Account Details for E-Payment	Applicable/Not Applicable	YES/NO
17	Capacity Evaluation of Bidder for current Tender	Applicable/Not Applicable	YES/NO
18	Tie Ups/Consortium Agreement are submitted as per format	Applicable/Not Applicable	YES/NO
19	Power of Attorney for Submission of Tender/Signing Contract Agreement	Applicable/Not Applicable	YES/NO
20	Analysis of Unit rates	Applicable/Not Applicable	YES/NO
21	Bankruptcy Code Proceedings (IBC) by NCLT or under Liquidation / BIFR (Undertaking to be enclosed if not applicable)	Applicable/Not Applicable	YES/NO

NOTE: STRIKE OFF 'YES' OR 'NO', AS APPLICABLE. TENDER NOT ACCOMPANIED BY THE PRESCRIBED ABOVE APPLICABLE DOCUMENTS ARE LIABLE TO BE SUMMARILY REJECTED.

DATE :

 AUTHORISED SIGNATORY
 (With Name, Designation and Company seal)

ANNEXURE-5CONDITIONS TO BE COMPLIED WITH FOR CONSORTIUM BIDDING (TECHNICAL TIE UP)

- 1 Prime Bidder and Consortium Partner or partners are required to enter into a consortium agreement with a validity period of six months initially. In case the consortium is awarded the contract, then the Consortium Agreement between the Prime Bidder and Consortium Partner or partners shall be extended till contractual completion period including extension periods if any applicable. The Prime Bidder and Consortium Partner(s) shall certify to BHEL regarding existence and validity of their consortium agreement on six monthly basis.
- 2 Standalone' bidder cannot become a 'Prime Bidder' or a 'Consortium bidder' or 'Technical Tie up bidder' in a consortium (or Technical Tie up) bidding. Prime bidder shall neither be a consortium partner to other prime bidder nor take any other consortium partners. However, consortium partner may enter into consortium agreement with other prime bidders. In case of non compliance, consortium bids of such Prime bidders will be rejected.
- 3 Number of partners for a consortium Bidding (or Technical Tie up) shall be as specified in the PQR.
- 4 Prime Bidder shall be as specified in the Pre Qualification Requirement, else the bidder who has the major share of work.
- 5 In order to be qualified for the tender, Prime Bidder and Consortium partner or partners shall satisfy (i) the Technical 'Pre Qualifying Requirements' specified for the respective package, (ii) "Assessment of Capacity of Bidder' as specified in clause 8.0
- 6 Prime Bidder shall comply with additional 'Technical' criteria of PQR as defined in 'Explanatory Notes for the PQR'
- 7 Prime Bidder shall comply with all other Pre Qualifying criteria for the Tender unless otherwise specified
- 8 In case customer approval is required, then Prime Bidder and Consortium Partner or partners shall have to be individually approved by Customer for being considered for the tender.
- 9 Prime Bidder shall be responsible for the overall execution of the contract
- 10 In case of award of job, Performance shall be evaluated for Prime Bidder and Consortium Partner or partners for their respective scope of work(s) as per prescribed formats.
- 11 In case the Consortium partner or partners back out, their SDs shall be encashed by BHEL. In such a case, other consortium partner or partners meeting the PQR have to be engaged by the Prime Bidder, and if not, the respective work will be withdrawn and executed on risk and cost basis of the Prime Bidder. The new consortium partner or partners shall submit fresh SDs as applicable.
- 12 In case the prime Bidder withdraws, the whole contract shall be considered cancelled and short closed.
- 13 After successful execution of one work with a consortium partner under direct orders of BHEL, the Prime Bidder shall be eligible for becoming a 'standalone' bidder for works similar to that for which consortium partner was engaged, for subsequent tenders.
- 14 The consortium partner shall submit SD equivalent to 1% of the total contract value in addition to the SD to be submitted by the prime Bidder for the total contract value. In case there are two consortium partners, then each partner shall submit SD equivalent to 0.5% of the total contract value in addition to the SD to be submitted by the prime Bidder for the total contract value.
- 15 In case of a Technical Tie up, all the clauses applicable for the Consortium partner shall be applicable for the Technical Tie up partner also.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure - AAmendment to GCC/SCC

1. Introduction of Clause No 1.15.13 in GCC as below:

Clause No 1.15.13: Additional security deposit (SD) has to be submitted by the successful bidder with value as follows:

"If the final price of successful bidder is lesser by 'more than 20%' of BHEL's estimate - 'Additional Security Deposit' will be required to be submitted by the successful bidder with value as follows:

Additional Security Deposit = 30 % of (A-B) limited to a maximum of 10% of the 'Total Price/Contract Value', where,

A = 80% of BHEL estimate

B = The final offered price of successful bidder through RA (In case of RA)

OR

Sealed paper price bid of successful bidder (in case of paper bid)

This 'Additional Security Deposit' shall have the same validity as that of the 'Security Deposit' and shall be revalidated/released in the manner as spelt out for the 'Security Deposit' as per relevant clause of GCC.

The BHEL's estimated value shall be disclosed to the successful bidder (on their request) at appropriate juncture in case 'Additional Security Deposit' is applicable."

2. Clause no. 1.9.1(ii) of GCC shall be read as below:

The EMD may be accepted only in the following forms:

(a) Cash deposit as permissible under the extant Income Tax Act (before tender opening)

(b) Electronic Fund Transfer credited in BHEL account (before tender opening)

(c) Banker's cheque/ Pay order/ Demand draft, in favour of BHEL (along with offer)

(d) Fixed Deposit Receipt (FDR) issued by Scheduled Banks/ Public Financial Institutions as defined in the Companies Act (FDR should be in the name of the Contractor, a/c BHEL).

In addition to above, the EMD amount in excess of Rs. 2 Lakh may also be accepted in the form of Bank Guarantee from scheduled bank. The Bank Guarantee in such cases shall be valid for atleast six months. EMD of successful tenderer will be retained as part of Security Deposit.

Clause no. 1.9.1(iv) & (v) of GCC stands deleted.

3. Clause no. 1.10.1 of GCC shall be read as below:

The total amount of Security Deposit will be 5% of the contract value. EMD of the successful tenderer shall be converted and adjusted towards the required amount of Security Deposit.

4. Clause no. 1.10.2 of GCC shall be read as below:

At least 50% of the required Security Deposit, including the EMD, should be furnished before start of the work. Balance of the Security Deposit can be deposited by deducting 10% of the gross amount progressively

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

from each of the running bills of the Contractor till the total amount of the required Security Deposit is collected.

The recoveries made from running bills (cash deduction towards balance SD amount) can be released against submission of equivalent Bank Guarantee in acceptable form, but only once, before completion of work, with the approval of competent authorities.

5. Clause no. 1.10.3 of GCC shall be read as below:

The balance amount to make up the required Security Deposit of 5% of the contract value may be accepted in the following forms:

- a) Cash (as permissible under the extant Income Tax Act)
- b) Local cheques of Scheduled Banks (subject to realization)/ Pay Order/ Demand Draft/ Electronic Fund Transfer in favour of BHEL
- c) Bank Guarantee from Scheduled Banks/ Public Financial Institutions as defined in the Companies Act. The Bank Guarantee format should have the approval of BHEL
- d) Fixed Deposit Receipt issued by Scheduled Banks/ Public Financial Institutions as defined in the Companies Act (FDR should be in the name of the Contractor, a/c BHEL)
- e) Securities available from Indian Post offices such as National Savings Certificates, Kisan Vikas Patras etc. (held in the name of Contractor furnishing the security and duly endorsed/ hypothecated/ pledged, as applicable, in favour of BHEL)

(Note: BHEL will not be liable or responsible in any manner for the collection of interest or renewal of the documents or in any other matter connected therewith)

6. Introduction of Clause No. 1.10.8 in GCC as below:

Clause No 1.10.8: SDBG to be furnished by the vendor before start of work. No payment will be released till SDBG is submitted by the vendor.

If requested by the vendor, cash recovery equivalent to SDBG value to be made from bills submitted by the vendor.

Also recovery of interest calculated @SBI PLR +2% on amount equivalent to SDBG / PBG value to be made for the gap period (difference between date of start of work and date of submission of BG / cash recovery).

In case of delay in extension of SDBG, in case of validity expiry, SDBG shall be invoked. However if the vendor submits a new BG after invocation of the previous BG then, it shall be refunded and recovery for the gap period, i.e. the duration for which BG is not available shall be made as stated above.

7. Clause no. 1.11 of GCC shall be read as below:

Security Deposit shall be refunded/Bank Guarantee(s) released to the Contractor along with the 'Final Bill' after deducting all expenses / other amounts due to BHEL under the contract / other contracts entered into with them by BHEL upon fulfilment of contractual obligations as per terms of the contract.

8. Clause no. 2.8.3, 2.8.4 and 2.8.5 of GCC shall be read as below:

Clause no. 2.8.3: The contractor shall comply with all applicable State and Central Laws, Statutory Rules, Regulations, Notifications, etc. such as Payment of Wages Act, Minimum Wages Act, Workmen Compensation Act, Employer's Liability Act, Industrial Disputes Act, Employers Provident Act, Employees State Insurance Scheme, Contract Labour (Regulation and Abolition) Act, 1970, Payment of Bonus & Gratuity Act, Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996, The Building and Other Construction Workers' Welfare Cess Act, 1996 and other Acts, Rules, and Regulations for labour/workers as applicable and as may be enacted by the State Government and Central Govt. during the tenure of the Contract and having force or jurisdiction at Site. The Contractor shall also comply with provisions of and give all such

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

notices to the local Governing Body, Police and other relevant Authorities as may be required by the Law.

Clause no. 2.8.4: The Contractor shall obtain independent License under the Contract Labour (Regulations and Abolition) Act, 1970 for engaging contract labour as required from the concerned Authorities based on the certificate (Form- V) issued by the Principal Employer/Customer.

Clause no. 2.8.5: The contractor shall pay and bear all taxes, fees, license charges, Cess, duties, deposits, tolls, royalties, commission or other charges which may be leviable on account of his operations in executing the contract.

9. Clause 2.12 of GCC (Overrun Compensation)

2.12 OVERRUN COMPENSATION (ORC)

2.12.1 ORC during original contract period: No ORC shall be applicable during the original contract period.

2.12.2 ORC during extended period for the reasons solely attributable to contractor: No ORC shall be applicable during the extended period granted for the reasons solely attributable to contractor and work executed during this period shall be paid as per original contract rates.

2.12.3 ORC during extended period for the reasons not attributable to contractor: ORC shall be payable as per following procedure:

2.12.3.1 For initial period of twelve months of extended period, ORC rate applicable over executed value shall be 5%. For every subsequent period of twelve months, ORC rate shall be further increased by 5% over the previous rate. For example, ORC rates applicable for initial period of 12 months and subsequent period of 12 months are given below.

Sl. No.	Extended Period for the reasons attributable to BHEL	ORC rate applicable over executed value
1	First 12 months	5%
2	13th-24th month and so on	10.25% $\{[(1.05 \times 1.05)-1] \times 100\}$

This process of increasing ORC rate for each subsequent period of 12 months shall continue till applicability of ORC.

2.12.3.2 On completion of original contract period as well as on completion of each subsequent period of twelve months i.e. at the time of change in applicable ORC rate, Delay Analysis shall be carried out and percentage shortfall attributable to both BHEL & Contractor shall be calculated.

2.12.3.3 For the purpose of calculation of ORC, executed value of work in the month shall be divided in Part-1 and Part-2 in proportion of percentage shortfall attributable to BHEL and contractor respectively, based on the last delay analysis as worked out in 2.12.3.2.

ORC shall be payable only on Part-1 and no ORC shall be payable on Part-2.

Value of Part-1 shall be further limited to the value of actual inputs provided by BHEL i.e. "Plan - Shortfall attributable to BHEL" for the month, as per Form-14 for calculation of ORC.

2.12.3.4 Payment of ORC amount shall be further regulated as follows:

- (i) 50% of the ORC is allocated for deployment of matching resources (with weightages) agreed as per the joint programme drawn vide 2.11.4. ORC Payment against resources shall be calculated in proportion to percentage of resources actually deployed w.r.t. planned resources, as per Form-14.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- (ii) 50% of ORC is allocated for achieving of planned progress agreed as per the joint programme drawn vide 2.11.4. ORC Payment shall be reduced in proportion to percentage shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month, as per Form-14.

2.12.3.5 The maximum amount of ORC payable for the month shall be limited to Rs. 5,00,000/-.

2.12.3.6 In case, there is no shortfall attributable to contractor for the month and also contractor has deployed the resources as agreed in Form-14 but ORC amount payable for the month worked out as per procedure mentioned in clause 2.12.3.3, 2.12.3.4 and 2.12.3.5, is less than Rs.1,00,000/-, then ORC amount payable for the month shall be Rs.1,00,000/- otherwise ORC amount payable for the month shall remain same.

2.12.3.7 In case execution is on HOLD (Other than Force Majeure), ORC shall be payable as per following:

- i). Contractor has not been permitted by BHEL to de-mobilize
 - a) ORC amount of Rs. 1,00,000/- per month shall be applicable during the period of HOLD provided resources as planned are deployed (not demobilised) during the period of hold.
 - b) Subsequent to lifting of HOLD, Period of HOLD shall not be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.
- ii). Contractor has been permitted to demobilize and to remobilize after lifting of HOLD
 - a) No ORC shall be payable to contractor for the period of HOLD.
 - b) Subsequent to lifting of HOLD, Period of HOLD shall not be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.

2.12.3.8 In case Force Majeure is invoked:

- (i) No ORC shall be applicable during the period of Force Majeure.
- (ii) Subsequent to revocation of Force Majeure, period of Force Majeure shall be excluded in calculation of period for deciding applicable ORC rate as per clause 2.12.3.1.

2.12.4 Applicability of ORC: ORC shall not be applicable for following activities.

- (i) Area cleaning, removal of temporary structures and return of scrap.
- (ii) Punch list points / pending points liquidation pending due to reasons attributable to contractor
- (iii) Submission of "As built Drawing"
- (iv) Material Reconciliation
- (v) Completion of Contract Closure formalities like HR Clearance/ No dues from various dept./ Statutory Authorities etc.

2.12.5 Total Over Run Compensation shall be limited to 10% of the cumulatively executed contract value till the month (excluding Taxes and Duties if payable extra). For this purpose, executed contract value excludes PVC, ORC and Extra/Supplementary Works.

10. Clause 2.14 of GCC (Quantity Variation)

- a) Existing Clause 2.14.1 of GCC stands revised as follows:

"The quantities given in the contract are tentative and may change to any extent (both in plus side and minus side). The quoted rates for individual items shall remain firm irrespective of any variations in the individual quantities No compensation becomes payable in case the variation of the final executed contract value is within the limit of Minus (-) 15% of awarded contract value"

- b) Existing Clause 2.14.2 ii). of GCC stands revised as follows:

"In case the finally executed contract value increases above the awarded Contract Value due to quantity variation, there will be no upward revision in the rates for the individual items and also contractor is not eligible for any compensation."

11. Clause 2.17 of GCC (Price Variation Compensation) stands revised as follows:

2.17 PRICE VARIATION COMPENSATION

2.17.1 In order to take care of variation in cost of execution of work on either side, due to variation in the index of LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS, Price Variation Formula as described herein shall be applicable (only for works executed during extended period, if any, subject to other conditions as described in this section)

2.17.2 85% component of Contract Value shall be considered for PVC calculations and remaining 15% shall be treated as fixed component. The basis for calculation of price variation in each category, their component, Base Index shall be as under:

SL NO	CATEGORY	BASE INDEX	PERCENTAGE COMPONENT ('K')				
			CIVIL PACKAGES (See Note AB/C)			MECHANICAL PACKAGES	Electrical, C&I Material Management/Handling and other labour oriented packages
			A	B	C		
i)	LABOUR (ALL CATEGORIES)	'MONTHLY ALL-INDIA AVERAGE CONSUMER PRICE INDEX NUMBERS FOR INDUSTRIAL WORKERS' published by Labour Bureau, Ministry of Labour and Employment, Government of India. (Website: labourbureau.nic.in)	40	25	30	65	80
ii)	HIGH SPEED DIESEL OIL	Name of Commodity: HSD Commodity Code: 1202000005 (See Note E)	5	3	5	5	5
iii)	WELDING ROD	Name of Commodity: MANUFACTURE OF BASIC METALS Commodity Code: 1314000000 (See Note E)				15	
iv)	CEMENT	Name of Commodity: ORDINARY PORTLAND CEMENT Commodity Code: 1313050003 (See Note E)		20	30		
v)	STEEL (Structural and Reinforcement Steel)	Name of Commodity: MILD STEEL: LONG PRODUCTS Commodity Code: 1314040000 (See Note E)		25			
vi)	All OTHER MATERIALS (Other than Cement & Steel)	Name of Commodity: ALL COMMODITIES Commodity Code: 1000000000 (See Note E)	40	12	20		

Note: A) Cement & Steel: Free Issue (BHEL Scope)
 B) Cement & Steel : In Contractor Scope
 C) Cement in Contractor Scope, and Steel is Free Issue (BHEL Scope)
 D) For Composite packages (i.e. Civil+Mechanical+Electrical and/or CI or Civil+Mechanical or Mechanical+Electrical and/or CI), the COMPONENT ('K') for various categories shall be as per respective packages as above.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

E) As per the 'MONTHLY WHOLE SALE PRICE INDEX' for the respective Commodity and Type, published by Office of Economic Adviser, Ministry of Commerce and Industry, Government of India. (Website: <http://eaindustry.nic.in/home.asp>). Revisions in the index or commodity will be re adjusted accordingly.

217.3 #

2.17.4 Payment/recovery due to variation in index shall be determined on the basis of the following notional formula in respect of the identified COMPONENT ('K') viz LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS.

$$P = K \times R \times \frac{(X_N - X_0)}{X_0}$$

Where

P =Amount to be paid/recovered due to variation in the Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

K = Percentage COMPONENT ('K') applicable for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

R=Value of work done for the billing month (Excluding Taxes and Duties if payable extra)

X_N = Revised Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials for the billing month under consideration

X₀ = Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials as on the Base date

2.17.5 Base date shall be the calendar month of the schedule completion date (i.e. Actual start date+ Scheduled Contractual completion period as per Letter of Intent/award and/or work order).

2.17.6 PVC shall not be payable for the ORC amount, Supplementary/Additional Items, Extra works.

However, PVC will be payable for items executed under quantity variation of BOQ items under originally awarded contract.

2.17.7 The contractor shall furnish necessary monthly bulletins in support of the requisite indices from the relevant websites along with his Bills.

2.17.8 The contractor will be required to raise the bills for price variation payments on a monthly basis along with the running bills irrespective of the fact whether any increase/decrease in the index for relevant categories has taken place or not. In case there is delay in publication of bulletins (final figure), the provisional values as published can be considered for payments and arrears shall be paid/recovered on getting the final values.

2.17.9 PVC shall be applicable only, during the extended period of contract (if any) after the scheduled completion period and for the portion of work delayed / backlog for the reasons not attributable to the Contractor.

However total quantum of Price Variation amount payable/recoverable shall be regulated as follows:

- i. For the portion of shortfall / backlog not attributable to contractor, PVC shall be worked out on the basis of indices applicable for the respective month in which work is done. Base index shall be applicable as defined in clause 2.17.5
- ii. In case of Force majeure, PVC shall be regulated as per (a) or (b) below:
 - a) Force majeure is invoked before "base date"/ "revised base date" (as explained below) OR immediately after "base date"/ "revised base date" in continuation (i.e. during the period when PVC is not applicable):
 1. Base date shall be revised: Revised base date =Previous base date+ duration of Force majeure.
No PVC will be applicable for the work done till revised base date.
 2. PVC will be applicable for the work done after "base date"/ "revised base date" as the case may be (during extended period when delay is not attributable to contractor). PVC shall be worked out on the basis of

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

indices applicable for the respective month in which work is done with base index as on "base date"/"revised base date" as the case may be.

b) Force majeure is invoked after "base date"/ "revised base date" as the case may be (during extended period when delay is not attributable to contractor) -

1. PVC shall be applicable for the work done after revocation of force majeure.
2. PVC for the work done after revocation of force majeure shall be worked out on the basis of indices applicable for the respective month in which work is done excluding the effect of change in indices during total period of Force majeure(s) invoked after "base date"/ "revised base date" as the case may be. Base index shall be taken as on "base date"/ "revised base date" as the case may be.

iii. The total amount of PVC shall not exceed 15% of the cumulatively executed contract value. Executed contract value for this purpose is exclusive of PVC, ORC, Supplementary/Additional Items and Extra works except extra items due to quantity variation.

12. Clause 2.2 of GCC (Law governing the contract and court jurisdiction) stands revised as follows:

"The contract shall be governed by the Law for the time being in force in the Republic of India. Subject to Clause 2.21.1 or 2.21.2 of this Contract, the Civil Court having original Civil Jurisdiction at Delhi for PSNR, at Kolkata for PSER, at Nagpur for PSWR and at Chennai for PSSR, shall alone have exclusive jurisdiction in regard to all matters in respect of the Contract."

13. Existing Clause 2.21 "ARBITRATION" of GCC has been amended as follows:

2.21 ARBITRATION & CONCILIATION

2.21.1 ARBITRATION:

2.21.1.1 Except as provided elsewhere in this Contract, in case Parties are unable to reach amicable settlement (whether by Conciliation to be conducted as provided in Clause 2.21.2 herein below or otherwise) in respect of any dispute or difference; arising out of the formation, breach, termination, validity or execution of the Contract; or, the respective rights and liabilities of the Parties; or, in relation to interpretation of any provision of the Contract; or, in any manner touching upon the Contract (hereinafter referred to as the 'Dispute'), then, either Party may, commence arbitration in respect of such Dispute by issuance of a notice in terms of section 21 of the Arbitration & Conciliation Act, 1996 (hereinafter referred to as the 'Notice'). The Notice shall contain the particulars of all claims to be referred to arbitration in sufficient detail and shall also indicate the monetary amount of such claim. The arbitration shall be conducted by a sole arbitrator to be appointed by the Head of the BHEL Power Sector Region issuing the Contract within 60 days of receipt of the complete Notice. The language of arbitration shall be English.

The Arbitrator shall pass a reasoned award.

Subject as aforesaid, the provisions of Arbitration and Conciliation Act 1996 (India) or statutory modifications or re-enactments thereof and the rules made thereunder as in force from time to time shall apply to the arbitration proceedings under this clause. The seat of arbitration shall be Kolkata (the place from where the contract is Issued). The Contract shall be governed by and be construed as per provisions of the laws of India. Subject to this provision 2.21.1.1 regarding ARBITRATION, the principal civil court exercising ordinary civil jurisdiction over the area where the seat of arbitration is located shall have exclusive jurisdiction over any DISPUTE to the exclusion of any other court.

2.21.1.2 In case of Contract with Public Sector Enterprise (PSE) or a Government Department, the following shall be applicable:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

In the event of any dispute or difference relating to the interpretation and application of the provisions of commercial contract(s) between Central Public Sector Enterprises (CPSEs)/ Port Trusts inter se and also between CPSEs and Government Departments/Organizations (excluding disputes concerning Railways, Income Tax, Customs & Excise Departments), such dispute or difference shall be taken up by either party for resolution through AMRCD (Administrative Mechanism for Resolution of CPSEs Disputes) as mentioned in DPE OM No. 4(1)/2013-DPE(GM)/FTS-1835 dated 22-05-2018 as amended from time to time.

2.21.1.3 The cost of arbitration shall initially be borne equally by the Parties subject to the final allocation thereof as per the award/order passed by the Arbitrator.

2.21.1.4 Notwithstanding the existence of any dispute or differences and/or reference for the arbitration, the Contractor shall proceed with and continue without hindrance the performance of its obligations under this Contract with due diligence and expedition in a professional manner unless the dispute inter-alia relates to cancellation, termination or short-closure of the Contract by BHEL.

2.21.2 CONCILIATION:

If at any time (whether before, during or after the arbitral or judicial proceedings), any Disputes (which term shall mean and include any dispute, difference, question or disagreement arising in connection with construction, meaning, operation, effect, interpretation or breach of the agreement, contract), which the Parties are unable to settle mutually, arise inter-se the Parties, the same may, be referred by either party to Conciliation to be conducted through Independent Experts Committee (IEC) to be appointed by competent authority of BHEL from the BHEL Panel of Conciliators.

Notes:

1. No serving or a retired employee of BHEL/Administrative Ministry of BHEL shall be included in the BHEL Panel of Conciliators.
2. Any other person(s) can be appointed as Conciliator(s) who is/are mutually agreeable to both the parties from outside the BHEL Panel of Conciliators.

The proceedings of Conciliation shall broadly be governed by Part-III of the Arbitration and Conciliation Act 1996 or any statutory modification thereof and as provided in Procedure 2.3 to this GCC. The Procedure 2.3 together with its Formats will be treated as if the same is part and parcel hereof and shall be as effectual as if set out herein in this GCC.

The Contractor hereby agrees that BHEL may make any amendments or modifications to the provisions stipulated in the Procedure 2.3 to this GCC from time to time and confirms that it shall be bound by such amended or modified provisions of the Procedure 2.3 with effect from the date as intimated by BHEL to it.

2.21.3 No Interest payable to Contractor

Notwithstanding anything to the contrary contained in any other document comprising in the Contract, no interest shall be payable by BHEL to Contractor on any moneys or balances including but not limited to the Security Deposit, EMD, Retention Money, RA Bills or the Final Bill, or any amount withheld and/or appropriated by BHEL etc., which becomes or as the case may be, is adjudged to be due from BHEL to Contractor whether under the Contract or otherwise.

14. Clause no. 2.7.2 and 2.7.3 of Volume-IB-GCC shall be revised as follows:

2.7.2.1 To terminate the contract or withdraw portion of work and get it done through other agency, at the risk and cost of the contractor after due notice of a period of 14 days' by BHEL in any of the following cases:

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- i). Contractor's poor progress of the work vis-à-vis execution timeline as stipulated in the Contract, backlog attributable to contractor including unexecuted portion of work does not appear to be executable within balance available period considering its performance of execution.
- ii). Withdrawal from or abandonment of the work by contractor before completion of the work as per contract.
- iii). Non-completion of work by the Contractor within scheduled completion period as per Contract or as extended from time to time, for the reasons attributable to the contractor.
- iv). Termination of Contract on account of any other reason (s) attributable to Contractor.
- v). Assignment, transfer, subletting of Contract without BHEL's written permission.
- vi). Non-compliance to any contractual condition or any other default attributable to Contractor.

Risk & Cost Amount against Balance Work:

Risk & Cost amount against balance work shall be calculated as follows: Risk & Cost Amount= [(A-B) + (A x H/100)]

Where,

A= Value of Balance scope of Work (*) as per rates of new contract

B= Value of Balance scope of Work (*) as per rates of old contract being paid to the contractor at the time of termination of contract i.e. inclusive of PVC & ORC, if any.

H = Overhead Factor to be taken as 5

In case (A-B) is less than 0 (zero), value of (A-B) shall be taken as 0 (zero).

* Balance scope of work (in case of termination of contract):

Difference of Contract Quantities and Executed Quantities as on the date of issue of Letter for 'Termination of Contract', shall be taken as balance scope of Work for calculating risk & cost amount. Contract quantities are the quantities as per original contract. If, Contract has been amended, quantities as per amended Contract shall be considered as Contract Quantities.

Items for which total quantities to be executed have exceeded the Contract Quantities based on drawings issued to contractor from time to time till issue of Termination letter, then for these items total Quantities as per issued drawings would be deemed to be contract quantities.

Substitute/ extra items whose rates have already been approved would form part of contract quantities for this purpose. Substitute/ extra items which have been executed but rates have not been approved, would also form part of contract quantities for this purpose and rates of such items shall be determined in line with contractual provisions.

However, increase in quantities on account of additional scope in new tender shall not be considered for this purpose.

NOTE: Incase portion of work is being withdrawn at risk & cost of contractor instead of termination of contract, contract quantities pertaining to portion of work withdrawn shall be considered as 'Balance scope of work' for calculating Risk & Cost amount.

LD against delay in executed work in case of Termination of Contract:

LD against delay in executed work shall be calculated in line with LD clause no. 2.7.9 of GCC, for the delay attributable to contractor. For limiting the maximum value of LD, contract value shall be taken as Executed Value of work till termination of contract.

Method for calculation of "LD against delay in executed work in case of termination of contract" is given below.

- i). Let the time period from scheduled date of start of work till termination of contract excluding the period of Hold (if any) not attributable to contractor = T1
- ii) Let the value of executed work till the time of termination of contract= X
- iii) Let the Total Executable Value of work for which inputs/fronts were made available to contractor and were planned for execution till termination of contract = Y
- iv) Delay in executed work attributable to contractor i.e. T2=[1-(X/Y)] x T1

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

- v) LD shall be calculated in line with LD clause (clause 2.7.9) of the Contract for the delay attributable to contractor taking "X" as Contract Value and "T2" as period of delay attributable to contractor.

2.7.2.2 In case Contractor fails to deploy the resources as per requirement, BHEL can deploy own/hired/otherwise arranged resources at the risk and cost of the contractor and recover the expenses incurred from the dues payable to contractor. Recoveries shall be actual expenses incurred plus 5% overheads or as defined in TCC.

2.7.3 Recoveries arising out of Risk & Cost and LD or any other recoveries due from Contractor

Following sequence shall be applicable for recoveries from contractor:

- a) Dues available in the form of Bills payable to contractor, SD, BGs against the same contract.
- b) Demand notice for deposit of balance recovery amount shall be sent to contractor, if funds are insufficient to effect complete recovery against dues indicated in (a) above.
- c) If contractor fails to deposit the balance amount to be recovered within the period as prescribed in demand notice, following action shall be taken for balance recovery:
 - i) Dues payable to contractor against other contracts in the same Region shall be considered for recovery.
 - ii) If recovery cannot be made out of dues payable to the contractor as above, balance amount to be recovered, shall be informed to other Regions/Units for making recovery from the Unpaid Bills/Running Bills/SD/BGs/Final Bills of contractor.
 - iii) In-case recoveries are not possible with any of the above available options, Legal action shall be initiated for recovery against contractor.

15. Clause 2.24 of GCC (Performance Guarantee for Workmanship)

Term "Special Conditions of Contract" appearing in 3rd line of the current clause 2.24.1, is replaced by "Technical Conditions of Contract"

16. Clause 4.2.1.7 of Special Condition of Contract (SCC)

At the end of Clause 4.2.1.7 (i.e. after the line "Decision of BHEL shall be final and binding on the contractor") following para is to be added

"It is not obligatory on the part of BHEL to provide any tools and tackles or other materials other than those specifically agreed to do so by BHEL. However, depending upon the availability, BHEL /BHEL's Customer handling equipment and other plants may be made available to the contractor on payment of hire charges as fixed, subject to the conditions laid down by BHEL/Customer from time to time. Unless paid in advance, such hire charges, if applicable, shall be recovered from contractor's bill / security deposit or any other due payment in one installment."

17. Clause 9.61 of SCC (NON-COMPLIANCE)

Under NON-COMPLIANCE, at the end of Clause 9.61 (i.e. after the line "Also the amount will be spent for purchasing the safety appliances and supporting the safety activity at site.") following para is to be added:

"In case of any financial deduction made by Customer for lapses of safety other than what is provided above or elsewhere in the contract, the same shall be charged on back-to-back basis on the defaulting contractor without prejudice to any other right spelt anywhere in the tender / contract"

18. Clause 2.15 of GCC (EXTRA WORKS)

Existing Clause 2.15.5 of GCC stands revised as follows:

"After eligibility of extra works is established and finally accepted by BHEL engineer/designer, payment will be released on competent authority's approval at the following rate.

MAN-HOUR RATE FOR ELIGIBLE EXTRA WORKS: Single composite average labour man-hour rate, including overtime if any, supervision, use of tools and tackles and other site expenses and incidentals, consumables for carrying out any major rework/ repairs/ rectification/ modification/ fabrication as certified by site as may arise during the course of erection, testing, commissioning or extra works arising out of transit, storage and erection damages, payment, if found due will be at Rs 108/- per man hour."

19. Clause 9.1 & 9.2 to 9.62 of SCC (HSE & OHSAS Obligations)

Cl. no. 9.0	No change
Cl. no. 9.1	HSE (Health, safety & Environment): Contractor will comply with HSE (Health, safety & Environment) requirements of BHEL as per "HSE Plan for Site Operations by Sub-contractors" (Document no. HSEP:14, Rev.00) attached with this tender.
Cl. no. 9.2 to 9.62	Deleted

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure -BTerms & Conditions of Reverse Auction

Against this enquiry for the subject item/ system with detailed scope of supply/service as per tender specifications, BHEL may resort to "REVERSE AUCTION PROCEDURE" i.e., ON LINE BIDDING (THROUGH A SERVICE PROVIDER). The philosophy followed for reverse auction shall be English Reverse (No ties).

1. For the proposed reverse auction, technically and commercially acceptable bidders only shall be eligible to participate.
2. Those bidders who have given their acceptance for Reverse Auction (quoted against this tender enquiry) will have to necessarily submit "online sealed bid" in the Reverse Auction. Non-submission of "online sealed bid" by the bidder for any of the eligible items for which techno- commercially qualified, will be considered as tampering of the tender process and will invite action by BHEL as per extant guidelines in vogue.
3. BHEL will engage the services of a service provider who will provide all necessary training and assistance before commencement of on line bidding on internet.
4. In case of reverse auction, BHEL will inform the bidders the details of Service Provider to enable them to contact & get trained for participation in the reverse auction.
5. Business rules like event date, time, bid decrement, extension etc. also will be communicated through service provider for compliance.
6. Bidders have to fax the Compliance form (annexure III) before start of Reverse auction. Without this, the bidder will not be eligible to participate in the event.
7. In line with the NIT terms, BHEL will provide the calculation sheet (e.g., EXCEL sheet) which will help to arrive at "Total Cost to BHEL" which is inclusive of all cost elements in line with terms & conditions of the tender for each of the bidder to enable them to fill-in the price and keep it ready for keying in during the Auction.
8. Reverse auction will be conducted on scheduled date & time.
9. At the end of Reverse Auction event, the lowest bidder value will be known on auction portal.
10. The lowest bidder has to fax/e-mail the duly signed and filled-in prescribed format for price breakup including that of line items, if required, (Annexure IV) as provided on case-to-case basis to Service provider within two working days of Auction without fail.
11. In case BHEL decides not to go for Reverse Auction procedure for this tender enquiry, the Price bids and price impacts, if any, already submitted and available with BHEL shall be opened as per BHEL's standard practice.
12. Bidders shall be required to read the "Terms and Conditions" section of the auctions site of Service provider, using the Login IDs and passwords given to them by the service provider before reverse auction event. Bidders should acquaint themselves of the "Business Rules of Reverse Auction", which will be communicated before the Reverse Auction.
13. If the Bidder or any of his representatives are found to be involved in Price manipulation/ cartel formation of any kind, directly or indirectly by communicating with other bidders, action as *per extant BHEL guidelines*, shall be initiated by BHEL and the results of the RA scrapped/ aborted.
14. The Bidder shall not divulge either his Bids or any other exclusive details of BHEL to any other party.
15. In case BHEL decides to go for reverse auction, the H1 bidder (whose quote is highest in online sealed bid) will not be allowed to participate in further RA process provided minimum three bidders are left after removal of H1 bidder. In case of tie for H1 bid (identical online sealed bids), 15 minutes' additional time shall be provided and all the participating bidders shall be informed by mail/message on bidding screen to enable bidders submit revised online sealed bids so as to break the tie.

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure -C**Certificate by Chartered Accountant on letter head**

This is to to Certify that M/S,
(hereinafter referred to as 'company') having its registered office at
..... is registered under MSMED Act 2006, (Entrepreneur
Memorandum No (Part-II) dtd:.....,
Category:..... (Micro/Small)). (Copy enclosed).

Further verified from the Books of Accounts that the investment of the company as per the latest audited financial year as per MSMED Act 2006 is as follows:

1. **For Manufacturing Enterprises:** Investment in plant and machinery (i.e. original cost excluding land and building and the items specified by the Ministry of Small Scale Industries vide its notification No.S.0.1722(E) dated October 5, 2006 :
Rs.....Lacs
2. **For Service Enterprises:** Investment in equipment (original cost excluding land and building and furniture, fittings and other items not directly related to the service rendered or as may be notified under the MSMED Act, 2006:
Rs.....Lacs

(Strike off whichever is not applicable)

The above investment of Rs.....Lacs is within permissible limit of Rs.....Lacs for Micro / Small (Strike off which is not applicable) Category under MSMED Act 2006.

Or

The company has been graduated from its original category {Micro/ Small} (Strike off which is not applicable) and the date of graduation of such enterprise from its original category is (dd/mm/yyyy) which is within the period of 3 years from the date of graduation of such enterprise from its original category as notified vide S.O. No. 3322(E) dated 01.11.2013 published in the gazette notification dated 04.11.2013 by Ministry of MSME.

Date:

(Signature)

Name-

Membership number-

Seal of Chartered Accountant

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure –D**Specific Clause w.r.t. BOCW Act & Cess Act**

1. It shall be the sole responsibility of the contractor as employer to ensure compliance of all the statutory obligations under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.
2. It shall be sole responsibility of the contractor engaging Building Workers in connection with the building or other construction works in the capacity of employer to apply and obtain registration certificate specifying the scope of work under the relevant provisions of the Building and Other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 from the appropriate Authorities.
3. It shall be responsibility of the contractor to furnish a copy of such Registration Certificate within a period of one month from the date of commencement of Work.
4. It is responsibility of the contractor to register under the Building and other Construction Workers' Welfare Cess Act, 1996 and deposit the required Cess for the purposes of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 at such rate as the Central Government may, by notification in the Official Gazette, from time to time specify. However, before registering and deposit of Cess under the Building and other Construction Workers' Welfare Cess Act, 1996, the contractor will seek written prior approval from the Construction Manager.
5. In case where the contractor has been accorded written approval by the Construction Manager and the contractor is required to furnish information in Form I and deposit the Cess under the Building and other Construction Workers' Welfare Cess Act, 1996, fails to do so, BHEL reserves right to impose penalty at the rate of 30% of Cess Amount.
6. It shall be sole responsibility of the contractor as employer to get registered every Building Worker, who is between the age of 18 to 60 years of age and who has been engaged in any building or other construction work for not less than ninety days during the preceding twelve months as Beneficiary under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996.
7. It shall be sole responsibility of the contractor as employer to maintain all the registers, records, notices and submit returns under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.
8. It shall be sole responsibility of the contractor as employer to provide notice of poisoning or occupation notifiable diseases, to report of accident and dangerous occurrences to the concerned authorities under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the rules made thereunder and to make payment of all statutory payments & compensation under the Employees' Compensation Act, 1923.
9. It shall be responsibility of the Contractor to furnish BHEL on monthly basis, Receipts/ Challans towards Deposit of the Cess under the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder along with following statistics :
 - (i) Number of Building Workers employed during preceding one month.
 - (ii) Number of Building workers registered as Beneficiary during preceding one month.
 - (iii) Disbursement of Wages made to the Building Workers for preceding wage month.
 - (iv) Remittance of Contribution of Beneficiaries made during the preceding month
10. BHEL shall reimburse the contractor the Cess amount deposited for the purposes of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 under the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder. However, BHEL shall not reimburse the Fee paid towards the registration of establishment, fees paid towards registration of Beneficiaries and Contribution of Beneficiaries remitted.
11. It shall be responsibility of the Building Worker engaged by the Contractor and registered as a beneficiary under the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 to contribute to the Fund at such rate per mensem as may be specified by the State government

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960 फ़ोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

by notification in the Official Gazette. Where such beneficiary authorizes the contractor being his employer to deduct his contribution from his monthly wages and to remit the same, the contractor shall remit such contribution to the Building and other construction Workers' Welfare Board in such manner as may be directed by the Board, within the fifteen days from such deduction.

12. If any point of time during the contract period, non-compliance of the provisions of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder is observed, BHEL reserves the right to withhold a reasonable amount from the payables to discharge any obligations on behalf of Contractors. The reasonable amount shall be decided by the Construction Manager in consultation with Resident Accounts Officer & Head HR and shall be final.
13. The contractor shall declare to undertake any liability or claim arising out of employment of building workers and shall indemnify BHEL from all consequences / liabilities / penalties in case of non compliance of the provisions of the Building and other Construction Workers' (Regulation of Employment and Conditions of Service) Act, 1996 and the Building and other Construction Workers' Welfare Cess Act, 1996 and the rules made thereunder.

ANNEXURE-E**Statewise GST Registration nos.**

Sl. No.	State / UT	GST Reg. No.
1	Andhra Pradesh	37AAACB4146P7Z8
2	Assam	18AAACB4146P1ZE
3	Bihar	10AAACB4146P1ZU
4	Chandigarh	04AAACB4146P1ZN
5	Chattishgarh	22AAACB4146P1ZP
6	Daman & Diu	25AAACB4146P1ZJ
7	Delhi	07AAACB4146P1ZH
8	Gujarat	24AAACB4146P1ZL
9	Haryana	06AAACB4146P1ZJ
10	HP	02AAACB4146P1ZR
11	Jharkhand	20AAACB4146P5ZP
12	Karnataka	29AAACB4146P1ZB
13	Kerala	32AAACB4146P1ZO
14	Maharashtra	27AAACB4146P1ZF
15	MP	23AAACB4146P1ZN
16	Punjab	03AAACB4146P2ZO
17	Rajasthan	08AAACB4146P1ZF
18	Tamil Nadu	33AAACB4146P2ZL
19	Telangana	36AAACB4146P1ZG
20	Tripura	16AAACB4146P1ZI
21	UP	09AAACB4146P2ZC
22	Uttarakhand	05AAACB4146P1ZL
23	West Bengal	19AAACB4146P1ZC
24	Mizoram	15AAACB4146P1ZK
25	Orissa	21AAACB4146P1ZR
26	Arunachal Pradesh	12AAACB4146P1ZQ

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

Annexure- CPP-GST/I**Please arrange to submit this filled-up format along with Tender**

Name of the Company	
Address of Company*	
Company Registration Number*	
Name of Partners / Directors	
ALL THE STATES WHERE BIDDER HAS A PLACE OF BUSINESS*	
ALL ADDRESS OF VENDOR MENTIONING THEIR PIN AS PER THE LATEST GST REGISTRATION*	
GSTN OF ALL THE ABOVE NOTED PLACES OF VENDOR*	
Bidder Type: Indian/ Foreign*	
City*	
State*	
Country*	
Postal Code*	
PAN/TAN Number*	
Company's Establishment Year	
Company's Nature of Business*	
Company's Legal Status* {limited /undertaking/joint venture/partnership/other}	
Company Category* {micro unit as per MSME/small unit as per MSME/medium unit as per MSME/ UAN as per Udyog Aadhaar Memorandum/ Ancillary unit/project affected person of this company/ssi/ other}	
Relevant documents to be submitted as applicable.	
Enter Company's Contact Person Details	
Title(Mr. / Mrs. / Ms. / Dr. / Shri)*	
Contact Name*	
Date Of Birth*	
Correspondence Email*	
(Correspondence Email ID can be same as your Login ID. All the mail correspondence will be sent only to the Correspondence Email ID.)	
Designation	
Phone*	
Fax*	
Mobile*	

पावर सेक्टर पूर्वी क्षेत्र (मुख्यालय)

POWER SECTOR EASTERN REGION, DJ-9/1, SALT LAKE CITY, KOLKATA - 700 091

फैक्स/Fax : (033) 23211960

फोन/Phone : बोर्ड/EPABX : 23211691/ 23398000

BHEL-IP

AA:SSP:IP:R02 dtd 10.07.2018

INTEGRITY PACT**Between**

Bharat Heavy Electricals Ltd. (BHEL), a company registered under the Companies Act 1956 and having its registered office at "BHEL House", Siri Fort, New Delhi - 110049 (India) hereinafter referred to as "The Principal", which expression unless repugnant to the context or meaning hereof shall include its successors or assigns of the ONE PART

and

_____, (description of the party along with address), hereinafter referred to as "The Bidder/ Contractor" which expression unless repugnant to the context or meaning hereof shall include its successors or assigns of the OTHER PART

Preamble

The Principal intends to award, under laid-down organizational procedures, contract/s for

_____. The Principal values full compliance with all relevant laws of the land, rules and regulations, and the principles of economic use of resources, and of fairness and transparency in its relations with its Bidder(s)/ Contractor(s).

In order to achieve these goals, the Principal will appoint Independent External Monitor(s), who will monitor the tender process and the execution of the contract for compliance with the principles mentioned above.

Section 1- Commitments of the Principal

1.1 The Principal commits itself to take all measures necessary to prevent corruption and to observe the following principles:-

1.1.1 No employee of the Principal, personally or through family members, will in connection with the tender for, or the execution of a contract, demand, take a promise for or accept, for self or third person, any material or immaterial benefit which the person is not legally entitled to.

1.1.2 The Principal will, during the tender process treat all Bidder(s) with equity and reason. The Principal will in particular, before and during the tender process, provide to all Bidder(s) the same information and will not provide to any Bidder(s) confidential/ additional information through which the Bidder(s) could obtain an advantage in relation to the tender process or the contract execution.

1.1.3 The Principal will exclude from the process all known prejudiced persons.

1.2 If the Principal obtains information on the conduct of any of its employees which is a penal offence under the Indian Penal Code 1860 and Prevention of Corruption Act 1988 or any other statutory penal enactment, or if there be a substantive suspicion in this regard, the Principal will inform its Vigilance Office and in addition can initiate disciplinary actions:

BHEL-IP

AA:SSP:IP:R02 dtd 10.07.2018

Section 2 - Commitments of the Bidder(s)/ Contractor(s)

- 2.1 The Bidder(s)/ Contractor(s) commit himself to take all measures necessary to prevent corruption. He commits himself to observe the following principles during his participation in the tender process and during the contract execution.
- 2.1.1 The Bidder(s)/ Contractor(s) will not, directly or through any other person or firm, offer, promise or give to the Principal or to any of the Principal's employees involved in the tender process or the execution of the contract or to any third person any material, immaterial or any other benefit which he/ she is not legally entitled to, in order to obtain in exchange any advantage of any kind whatsoever during the tender process or during the execution of the contract.
- 2.1.2 The Bidder(s)/ Contractor(s) will not enter with other Bidder(s) into any illegal or undisclosed agreement or understanding, whether formal or informal. This applies in particular to prices, specifications, certifications, subsidiary contracts, submission or non-submission of bids or any other actions to restrict competitiveness or to introduce cartelization in the bidding process.
- 2.1.3 The Bidder(s)/ Contractor(s) will not commit any penal offence under the relevant Indian Penal Code (IPC) and Prevention of Corruption Act; further the Bidder(s)/ Contractor(s) will not use improperly, for purposes of competition or personal gain, or pass on to others, any information or document provided by the Principal as part of the business relationship, regarding plans, technical proposals and business details, including information contained or transmitted electronically.
- 2.1.4 Foreign Bidder(s)/ Contractor(s) shall disclose the name and address of agents and representatives in India and Indian Bidder(s)/ Contractor(s) to disclose their foreign principals or associates. The Bidder(s)/ Contractor(s) will, when presenting his bid, disclose any and all payments he has made, and is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract.
- 2.2 The Bidder(s)/ Contractor(s) will not instigate third persons to commit offences outlined above or be an accessory to such offences.
- 2.3 The Bidder(s)/ Contractor(s) shall not approach the Courts while representing the matters to IEMs and will await their decision in the matter.

Section 3 - Disqualification from tender process and exclusion from future contracts

If the Bidder(s)/ Contractor(s), before award or during execution has committed a transgression through a violation of Section 2 above, or acts in any other manner such as to put his reliability or credibility in question, the Principal is entitled to disqualify the Bidder(s)/ Contractor(s) from the tender process or take action as per the separate "Guidelines on Banning of Business dealings with Suppliers/ Contractors", framed by the Principal.

Section 4 - Compensation for Damages

- 4.1 If the Principal has disqualified the Bidder from the tender process prior to the award according to Section 3, the Principal is entitled to demand and recover the damages equivalent Earnest Money Deposit/ Bid Security.
- 4.2 If the Principal has terminated the contract according to Section 3, or if the Principal is entitled to terminate the contract according to section 3, the Principal shall be entitled to

BHEL-IP

AA:SSP:IP:R02 dtd 10.07.2018

demand and recover from the Contractor liquidated damages equivalent to 5% of the contract value or the amount equivalent to Security Deposit/ Performance Bank Guarantee, whichever is higher.

Section 5 - Previous Transgression

- 5.1 The Bidder declares that no previous transgressions occurred in the last 3 years with any other company in any country conforming to the anti-corruption approach or with any other Public Sector Enterprise in India that could justify his exclusion from the tender process.
- 5.2 If the Bidder makes incorrect statement on this subject, he can be disqualified from the tender process or the contract, if already awarded, can be terminated for such reason.

Section 6 - Equal treatment of all Bidders/ Contractors / Sub-contractors

- 6.1 The Principal will enter into agreements with identical conditions as this one with all Bidders and Contractors. In case of sub-contracting, the Principal contractor shall be responsible for the adoption of IP by his sub-contractors and shall continue to remain responsible for any default by his sub-contractors.
- 6.2 The Principal will disqualify from the tender process all bidders who do not sign this pact or violate its provisions.

Section 7 - Criminal Charges against violating Bidders/ Contractors /Subcontractors

If the Principal obtains knowledge of conduct of a Bidder, Contractor or Subcontractor, or of an employee or a representative or an associate of a Bidder, Contractor or Subcontractor which constitutes corruption, or if the Principal has substantive suspicion in this regard, the Principal will inform the Vigilance Office.

Section 8 - Independent External Monitor(s)

- 8.1 The Principal appoints competent and credible Independent External Monitor for this Pact. The task of the Monitor is to review independently and objectively, whether and to what extent the parties comply with the obligations under this agreement.
- 8.2 The Monitor is not subject to instructions by the representatives of the parties and performs his functions neutrally and independently. He reports to the CMD, BHEL.
- 8.3 The Bidder(s)/ Contractor(s) accepts that the Monitor has the right to access without restriction to all contract documentation of the Principal including that provided by the Bidder(s)/ Contractor(s). The Bidder(s)/ Contractor(s) will grant the monitor, upon his request and demonstration of a valid interest, unrestricted and unconditional access to his contract documentation. The same is applicable to Sub-contractor(s). The Monitor is under contractual obligation to treat the information and documents of the Bidder(s)/ Contractor(s) / Sub-contractor(s) with confidentiality in line with Non- disclosure agreement.
- 8.4 The Principal will provide to the Monitor sufficient information about all meetings among the parties related to the contract provided such meetings could have an impact on the contractual relations between the Principal and the Contractor. The parties offer to the Monitor the option to participate in such meetings.

BHEL-IP

AA:SSP:IP:R02 dtd 10.07.2018


- 8.5 The role of IEMs is advisory, would not be legally binding and it is restricted to resolving issues raised by an intending bidder regarding any aspect of the tender which allegedly restricts competition or bias towards some bidders. At the same time, it must be understood that IEMs are not consultants to the Management. Their role is independent in nature and the advice once tendered would not be subject to review at the request of the organization.
- 8.6 For ensuring the desired transparency and objectivity in dealing with the complaints arising out of any tendering process, the matter should be examined by the full panel of IEMs jointly as far as possible, who would look into the records, conduct an investigation, and submit their joint recommendations to the Management.
- 8.7 The IEMs would examine all complaints received by them and give their recommendations/ views to CMD, BHEL, at the earliest. They may also send their report directly to the CVO and the Commission, in case of suspicion of serious irregularities requiring legal/ administrative action. IEMs will tender their advice on the complaints within 10 days as far as possible.
- 8.8 The CMD, BHEL shall decide the compensation to be paid to the Monitor and its terms and conditions.
- 8.9 IEM should examine the process integrity, they are not expected to concern themselves with fixing of responsibility of officers. Complaints alleging mala fide on the part of any officer of the organization should be looked into by the CVO of the concerned organisation.
- 8.10 If the Monitor has reported to the CMD, BHEL, a substantiated suspicion of an offence under relevant Indian Penal Code/ Prevention of Corruption Act, and the CMD, BHEL has not, within reasonable time, taken visible action to proceed against such offence or reported it to the Vigilance Office, the Monitor may also transmit this information directly to the Central Vigilance Commissioner, Government of India.
- 8.11 The number of Independent External Monitor(s) shall be decided by the CMD, BHEL.
- 8.12 The word 'Monitor' would include both singular and plural.

Section 9 - Pact Duration

- 9.1 This Pact shall be operative from the date IP is signed by both the parties till the final completion of contract for successful bidder and for all other bidders 6 months after the contract has been awarded. Issues like warranty / guarantee etc. should be outside the purview of IEMs.
- 9.2 If any claim is made/ lodged during currency of IP, the same shall be binding and continue to be valid despite the lapse of this pact as specified above, unless it is discharged/ determined by the CMD, BHEL.

Section 10 - Other Provisions

- 10.1 This agreement is subject to Indian Laws and jurisdiction shall be registered office of the Principal, i.e. New Delhi.



- 10.2 Changes and supplements as well as termination notices need to be made in writing. Side agreements have not been made.
- 10.3 If the Contractor is a partnership or a consortium, this agreement must be signed by all partners or consortium members.
- 10.4 Should one or several provisions of this agreement turn out to be invalid, the remainder of this agreement remains valid. In this case, the parties will strive to come to an agreement to their original intentions.
- 10.5 Only those bidders / contractors who have entered into this agreement with the Principal would be competent to participate in the bidding. In other words, entering into this agreement would be a preliminary qualification.

For & On behalf of the Principal

(Office Seal)

Place-----

Date-----

Witness:_____

(Name & Address) _____

For & On behalf of the Bidder/
Contractor

(Office Seal)

Witness:_____

(Name & Address) _____

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 1 OF 30

TABLE OF CONTENTS

1. Chapter-1 : General Instructions to Tenderers

- 1.1. Despatch Instructions
- 1.2. Submission of Tenders
- 1.3. Language
- 1.4. Price Discrepancy
- 1.5. Qualification of Tenderers
- 1.6. Evaluation of Bids
- 1.7. Data to be enclosed
- 1.8. Authorisation and Attestation
- 1.9. Earnest Money Deposit
- 1.10. Security Deposit
- 1.11. Return of Security Deposit
- 1.12. Bank Guarantee
- 1.13. Validity of offer
- 1.14. Execution of Contract Agreement
- 1.15. Rejection of Tender and other Conditions

2. Chapter-2

- 2.1. Definitions
- 2.2. Law Governing Contract and Court Jurisdiction
- 2.3. Issue of Notice
- 2.4. Use of land
- 2.5. Commencement of Work

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 2 OF 30

- 2.6. Measurement of Work and Mode of Payment
- 2.7. Rights of BHEL
- 2.8. Responsibilities of Contractor in respect of Local Laws, Employment of Workers etc
- 2.9. Progress Monitoring, Monthly Review and Performance Evaluation
- 2.10. Time of Completion
- 2.11. Extension of Time for Completion
- 2.12. Over Run Compensation
- 2.13. Interest Bearing Recoverable Advances
- 2.14. Quantity Variation
- 2.15. Extra Works
- 2.16. Supplementary Items
- 2.17. Price Variation Clause
- 2.18. Insurance
- 2.19. Strikes & Lockout
- 2.20. Force Majeure
- 2.21. Arbitration and Reconciliation
- 2.22. Retention Amount
- 2.23. Payments
- 2.24. Performance Guarantee for Workmanship
- 2.25. Closing of Contracts
- 2.26. Reverse Auction
- 2.27. Suspension of Business Dealings
- 2.28. Other Issues

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 3 OF 30

CHAPTER -1

1. GENERAL INSTRUCTION TO TENDERERS

1.1. DESPATCH INSTRUCTION

- i) The General Conditions of Contract form part of the Tender specifications. All pages of the tender documents shall be duly signed, stamped and submitted along with the offer in token of complete acceptance thereof. The information furnished shall be complete by itself. The tenderer is required to furnish all the details and other documents as required in the following pages
- ii) Tenderers are advised to study all the tender documents carefully. Any submission of tender by the tenderer shall be deemed to have been done after careful study and examination of the tender documents and with the full understanding of the implications thereof. Should the tenderers have any doubt about the meaning of any portion of the Tender Specification or find discrepancies or omissions in the drawings or the tender documents issued are incomplete or shall require clarification on any of the technical aspect, the scope of work etc., he shall at once, contact the authority inviting the tender well in time (so as not to affect last date of submission) for clarification before the submission of the tender. Tenderer's request for clarifications shall be with reference to Sections and Clause numbers given in the tender documents. The specifications and terms and conditions shall be deemed to have been accepted by the tenderer in his offer. Non compliance with any of the requirements and instructions of the tender enquiry may result in the rejection of the tender.
- iii) Integrity pact (IP) shall be applicable for all tenders / contracts if indicated in NIT. This integrity pact shall be issued as part of the Tender documents and shall be returned by the bidder along with Techno-commercial bid duly filled, signed and stamped by the authorized signatory who signs the bid. Only those vendors / bidders who have entered into such an IP with BHEL shall be considered qualified to participate in the bidding. Entering into this pact shall be a preliminary qualification.

1.2. SUBMISSION OF TENDERS

- 1.2.1 The tenderers must submit their tenders to Officer inviting tender as per instructions in the NIT
- 1.2.2 Tenders submitted by post shall be sent by 'REGISTERED POST ACKNOWLEDGEMENT DUE / by COURIER' and shall be posted with due allowance for any postal/courier delays. BHEL takes no responsibility for delay, loss or non-receipt of tenders sent by post/courier. The tenders received after the specified time of their submission are treated as 'Late Tenders' and shall not be considered under any circumstances. Offers received by Fax/Email/Internet shall be considered as per terms of NIT.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 4 OF 30

1.2.3 Tenders shall be opened by authorised Officer of BHEL at his office at the time and date as specified in the NIT, in the presence of such of those tenderers or their authorised representatives who may be present

1.2.4 Tenderers whose bids are found techno commercially qualified shall be informed the date and time of opening of the Price Bids and such Tenderers may depute their representatives to witness the opening of the price bids. BHEL's decision in this regard shall be final and binding.

1.2.5 Before submission of Offer, the tenderers are advised to inspect the site of work and the environments and be well acquainted with the actual working and other prevalent conditions, facilities available, position of material and labour, means of transport and access to Site, accommodation, etc. No claim will be entertained later on the grounds of lack of knowledge of any of these conditions.

1.3. LANGUAGE

1.3.1 The tenderer shall quote the rates in English language and international numerals. These rates shall be entered in figures as well as in words. For the purpose of the tenders, the metric system of units shall be used.

1.3.2 All entries in the tender shall either be typed or written legibly in ink. Erasing and over-writing is not permitted and may render such tenders liable for rejection. All cancellations and insertions shall be duly attested by the tenderer.

1.4 PRICE DISCREPANCY:

1.4.1 **Conventional (Manual) Price Bid opening :** In the case of price bid opening without resorting to Reverse Auction, if there are differences between the rates given by the tenderer in words and figures or in amount worked out by him, the following procedure for evaluation and award shall be followed:

- i) When there is a difference between the rates in figures and in words, the rates which corresponds to the amounts worked out by the contractor, shall be taken as correct
- ii) When the amount of an item is not worked out by the contractor or it does not correspond with the rate written either in figure or in words, then the rate quoted by the contractor in words shall be taken as correct
- iii) When the rate quoted by the contractor in figures and words tallies but the amount is not worked out correctly, the rate quoted by the contractor shall be taken as correct and not the amount.
- iv) In case of lumpsum price, if there is any difference between the amount in figures and in words, the amount quoted by the bidder in words shall be taken as correct.
- v) In case of omission in quoting any rate for one or more items, the evaluation shall be done considering the highest quoted rate obtained against the respective items by other tenderers for the subject tender. If the tenderer becomes L-1, the notional rates for the omission items shall be the lowest rates quoted for the respective items by the other tenderers against the respective omission items for the subject job and the 'Total quoted price (loaded for omissions)' shall be arrived at. However the overall price remaining the same as quoted originally, the rates for all the items in the 'Total quoted price (loaded for omissions)' shall be reduced item wise in proportion to the ratio of 'Original' total price and the 'Total quoted price (loaded for omissions)'
- vi) The 'Final Total Amount' shall be arrived at after considering the amounts worked out in line with 'i' to 'iv' above.

1.4.2 **Reverse Auction:** In case of Reverse Auction, the successful bidder shall undertake to execute

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 5 OF 30

the work as per overall price offered by him during the Reverse Auction process. In case of omission of rates, the procedure shall be as per 'Guidelines for Reverse Auction' enclosed.

1.5. QUALIFICATION OF TENDERERS

- i) Only tenderers who have previous experience in the work of the nature and description detailed in the Notice Inviting Tender and/or tender specification are expected to quote for this work duly detailing their experience along with offer.
- ii) Offers from tenderers who do not have proven and established experience in the field shall not be considered
- iii) .Offers from tenderers who are under suspension (banned) by any Unit/Region/Division of BHEL shall not be considered.
- iv) Offers from tenderers who do not comply with the latest guidelines of Ministry/Commissions of Govt of India shall not be considered.

1.6. EVALUATION OF BIDS

- i) Technical Bids submitted by the tenderer will be opened first and evaluated for fulfilling the Pre Qualification criteria and other conditions in NIT/Tender documents, based on documentary evidences submitted along with the offer
- ii) In case the same qualifying experience is claimed by more than one agency, then the agency who has executed the work as per documentary evidence submitted shall only be qualified. Scope of qualifying work should be totally with the agency who has executed and in case it is only labour+consumables without T&P, then the responsibility of execution is assigned to the first agency and not to the agency who has executed only as labour supply contractor. Further, BHEL reserves the right to ask for further proofs including submission of TDS certificates for the said job
- iii) In case the qualifying experience is claimed by private organizations based on Work Order and completion certificates from another private organization, BHEL reserves the right to ask for further proofs including submission of TDS certificates for the said job
- iv) Assessing Bidder Capacity for executing the current tender shall be as per Notice Inviting Tender
- v) Price Bids of shortlisted bidders shall only be opened either through the conventional price bid opening or through electronic Reverse Auction, at the discretion of BHEL
- vi) Price Bids of unqualified bidders shall not be opened. Reasons for rejection shall be intimated in due course after issue of LOI/LOA to successful bidder and receipt of unqualified acceptance from the successful bidder
- vii) Bidders are advised to also refer to clause no 2.9.4 regarding evaluation of their performance in ongoing projects for the current tender

1.7. DATA TO BE ENCLOSED

Full information shall be given by the tenderer in respect of the following. Non-submission of this information may lead to rejection of the offer.

- i) **INCOME TAX PERMANENT ACCOUNT NUMBER**
Certified copies of Permanent Account Numbers as allotted by Income Tax Department for the Company/Firm/Individual Partners, etc. shall be furnished along with tender.
- ii) **ORGANIZATION CHART**
The organization chart of the tenderer's organization, including the names, addresses and contact

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 6 OF 30

information of the Directors/Partners shall be furnished along with the offer.

- iii) An attested copy of the Power of Attorney, in case the tender is signed by an individual other than the sole proprietor
- iv) IN CASE OF INDIVIDUAL TENDERER:
His / her full name, address and place & nature of business.
- v) IN CASE OF PARTNERSHIP FIRM
The names of all the partners and their addresses, A copy of the partnership deed/instrument of partnership duly certified by the Notary Public shall be enclosed.
- vi) IN CASE OF COMPANIES:
 - a. Date and place of registration including date of commencement certificate in case of Public Companies (certified copies of Memorandum and articles of Association are also to be furnished).
 - b. Nature of business carried on by the Company and the provisions of the Memorandum relating thereof.

1.8 AUTHORISATION AND ATTESTATION

Tenders shall be signed by a person duly authorized/empowered to do so. An attested copy of the Power of Attorney, in case the tender is signed by an individual other than the sole proprietor shall be submitted along with the tenders

1.9 EARNEST MONEY DEPOSIT

1.9.1 Every tender must be accompanied by the prescribed amount of Earnest Money Deposit (EMD) in the manner described herein.

- i) EMD shall be furnished along with the offer in full as per the amount indicated in the Special Conditions of Contract / NIT
- ii) EMD is to be paid in cash (as permissible under Income Tax Act), Pay order or Demand Draft in favour of 'Bharat Heavy Electricals Limited' and payable at Regional HQ issuing the tender.
- iii) No other form of EMD remittance shall be acceptable to BHEL
- iv) Bidder may opt to deposit "One Time EMD" of Rs. 2.0 lakhs (Rupees Two lakhs only) with BHEL:Power Sector Region HQ issuing the tender, which will enable them to participate in all the future tender enquiries in respect of Erection and Commissioning services issued from the respective office. Interested bidders may clearly send their consent for converting the present EMD into a "One Time EMD" in their offer.
 - Note : The 'One Time EMD' cannot be withdrawn by the tenderers within 3 years from the date of deposit, under any circumstances. The Tenderer who wishes to withdraw after three years will not be allowed to submit 'One Time EMD' again.
- v) Bidders who have already deposited such "One Time EMD" of Rs. 2.00 lakh are exempted from submission of EMD for this tender. However a copy of 'One Time EMD' certificate issued by BHEL Regional HQ issuing the tender shall be enclosed along with the offer.

1.9.2 EMD by the bidder will be forfeited as per Tender Documents if

- i) After opening the tender, the bidder revokes his tender within the validity period or increases his

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 7 OF 30

earlier quoted rates.

- ii) The bidder does not commence the work within the period as per LOI/Contract. In case the LOI / contract is silent in this regard then within 15 days after award of contract.

1.9.3 EMD shall not carry any interest.

1.9.4 In the case of unsuccessful bidders, the Earnest Money will be refunded to them within a reasonable time after acceptance of award by successful tenderer.

1.10 SECURITY DEPOSIT

1.10.1 Upon acceptance of Tender, the successful Tenderer should deposit the required amount of Security Deposit for satisfactory completion of work, as per the rates given below:

SN	Contract Value	Security Deposit Amount
1	Up to Rs. 10 lakhs	10% of Contract Value
2	Above Rs. 10 lakhs upto Rs.50 lakhs	1 lakh + 7.5% of the Contract Value exceeding Rs. 10 lakhs.
3	Above Rs. 50 lakhs	Rs 4 lakhs + 5% of the Contract Value exceeding Rs. 50 lakhs.

1.10.2 The security Deposit should be furnished before start of the work by the contractor.

1.10.3 Security Deposit may be furnished in any one of the following forms

- i) Cash (as permissible under the Income Tax Act)
- ii) Pay Order / Demand Draft in favour of BHEL.
- iii) Local cheques of scheduled banks, subject to realization.
- iv) Securities available from Post Offices such as National Savings Certificates, Kisan Vikas Patras etc. (Certificates should be held in the name of Contractor furnishing the security and duly pledged in favour of BHEL and discharged on the back).
- v) Bank Guarantee from Scheduled Banks / Public Financial Institutions as defined in the Companies Act. The Bank Guarantee format for Security Deposit shall be in the prescribed formats
- vi) Fixed Deposit Receipt issued by Scheduled Banks / Public Financial Institutions as defined in the Companies Act. The FDR should be in the name of the contractor, A/C BHEL, duly discharged on the back.
- vii) Security deposit can also be recovered at the rate of 10% from the running bills. However in such cases at least 50% of the Security Deposit should be deposited in any form as prescribed before start of the work and the balance 50% may be recovered from the running bills.
- viii) EMD of the successful bidder can be converted and adjusted against the cash portion of Security Deposit excepting for such bidders who have remitted One Time EMD.

NOTE: Acceptance of Security Deposit against Sl. No. (iv) and (vi) above will be subject to hypothecation or endorsement on the documents in favour of BHEL. However, BHEL will not be liable or responsible in any manner for the collection of interest or renewal of the documents or in any other matter connected therewith.

1.10.4 The Security Deposit shall not carry any interest.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 8 OF 30

1.10.5 In case the value of work exceeds / reduces from the awarded / accepted value, the Security Deposit shall be correspondingly enhanced / reduced as given below:

- i) The enhanced part of the Security Deposit shall be immediately deposited by the Contractor or adjusted against payments due to the Contractor.
- ii) There will be no reduction in Security Deposit value in case of variation in contract value upto the lower limit specified in Quantity variation clause. In case of reduction of contract value beyond the lower limit specified in Quantity Variation clause, then the Security Deposit shall be re adjusted in proportion.
- iii) In case of reduction, the reduced Contract value shall be certified by BHEL Construction Manager after ascertaining / freezing of BOQ / Drawings from the Design / Engineering Centre. The reduced Security Deposit value can only be considered after taking into account the adequacy of the securities held by BHEL to meet the liabilities of the contractor for the contract, and the performance of the contract in general. In such cases, the revised value of Security Deposit shall be worked out only after execution of not less than the lower limit of the revised scope of work/contract value as per quantity variation clause, and as certified by Construction Manager. This reduction in value of Security Deposit shall not entitle the contractor to any amendment of Contract and shall be operated at the discretion of BHEL
- iv) Contract value for the purpose of operating the reduced/increased value of Security Deposit due to Quantity Variation, shall be exclusive of Price Variation Clause, Over Run Compensation and Extra works done on manday rates.

1.10.6 The validity of Bank Guarantees towards Security Deposit shall be initially upto the completion period as stipulated in the Letter of Intent/Award + 3 months, and the same shall be kept valid by proper renewal till the acceptance of Final Bills of the Contractor, by BHEL

1.10.7 BHEL reserves the right of forfeiture of Security Deposit in addition to other claims and penalties in the event of the Contractor's failure to fulfill any of the contractual obligations or in the event of termination of contract as per terms and conditions of contract. BHEL reserves the right to set off the Security Deposit against any claims of other contracts with BHEL.

1.11 RETURN OF SECURITY DEPOSIT

Security Deposit shall be refunded/Bank Guarantee(s) released to the Contractor along with the 'Final Bill' after deducting all expenses / other amounts due to BHEL under the contract / other contracts entered into with them by BHEL.

1.12 BANK GUARANTEES

Where ever Bank Guarantees are to be furnished/submitted by the contractor, the following shall be complied with

- i) Bank Guarantees shall be from Scheduled Banks / Public Financial Institutions as defined in the Companies Act.
- ii) The Bank Guarantees shall be as per prescribed formats.
- iii) It is the responsibility of the bidder to get the Bank Guarantees revalidated/extended for the required period (subject to a minimum period of six months), as per the advice of BHEL Site Engineer / Construction Manager. BHEL shall not be liable for issue of any reminders regarding expiry of the

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 9 OF 30

Bank Guarantees.

- iv) In case extension/further extensions of any Bank Guarantees are not required, the bidders shall ensure that the same is explicitly endorsed by the Construction Manager and submitted to the Regional HQ issuing the LOI/LOA.
- v) In case the Bank Guarantees are not extended before the expiry date, BHEL reserves the right to invoke the same by informing the concerned Bank in writing, without any advance notice/communication to the concerned bidder.
- vi) Bidders to note that any corrections to Bank Guarantees shall be done by the issuing Bank, only through an amendment in an appropriate non judicial stamp paper.
- vii) The Original Bank Guarantee shall be sent directly by the Bank to BHEL under Registered Post (Acknowledgement Due), addressed to the Subcontracting Department of the respective Region.

1.13 VALIDITY OF OFFER

The rates in the Tender shall be kept open for acceptance for a minimum period of SIX MONTHS from latest due date of offer submission (including extension, if any) . In case BHEL (Bharat Heavy Electricals Ltd) calls for negotiations, such negotiations shall not amount to cancellation or withdrawal of the original offer which shall be binding on the tenderers.

1.14 EXECUTION OF CONTRACT AGREEMENT

The successful tenderer's responsibility under this contract commences from the date of issue of the Letter of Intent by Bharat Heavy Electricals Limited. The Tenderer shall submit an unqualified acceptance to the Letter of Intent/Award within the period stipulated therein.

The successful tenderer shall be required to execute an agreement in the prescribed form, with BHEL, within a reasonable time after the acceptance of the Letter of Intent/Award, and in any case before releasing the first running bill. The contract agreement shall be signed by a person duly authorized/empowered by the tenderer. The expenses for preparation of agreement document shall be borne by BHEL

1.15 REJECTION OF TENDER AND OTHER CONDITIONS

- 1.15.1 The acceptance of tender will rest with BHEL which does not bind itself to accept the lowest tender or any tender and reserves to itself full rights for the following without assigning any reasons whatsoever:-

- a. To reject any or all of the tenders.
- b. To split up the work amongst two or more tenderers as per NIT
- c. To award the work in part if specified in NIT
- d. In case of either of the contingencies stated in (b) and (c) above, the time for completion as stipulated in the tender shall be applicable.

- 1.15.2 Conditional tenders, unsolicited tenders, tenders which are incomplete or not in the form specified or defective or have been materially altered or not in accordance with the tender

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 10 OF 30

conditions, specifications etc., are liable to be rejected.

- 1.15.3 Tenders are liable to be rejected in case of unsatisfactory performance of the tenderer with BHEL, or tenderer under suspension (hold/banning /delisted) by any unit / region / division of BHEL or tenderers who do not comply with the latest guidelines of Ministry/Commissions of Govt of India. BHEL reserves the right to reject a bidder in case it is observed that they are overloaded and may not be in a position to execute this job as per the required schedule in line with clause no. 9.0 of the 'NIT'. The decision of BHEL will be final in this regard.
- 1.15.4 If a tenderer who is a proprietor expires after the submission of his tender or after the acceptance of his tender, BHEL may at their discretion, cancel such tender. If a partner of a firm expires after the submission of tender or after the acceptance of the tender, BHEL may then cancel such tender at their discretion, unless the firm retains its character.
- 1.15.5 BHEL will not be bound by any Power of Attorney granted by changes in the composition of the firm made subsequent to the execution of the contract. They may, however, recognise such power of Attorney and changes after obtaining proper legal advice, the cost of which will be chargeable to the contractor concerned.
- 1.15.6 If the tenderer deliberately gives wrong information in his tender, BHEL reserves the right to reject such tender at any stage or to cancel the contract if awarded and forfeit the Earnest Money/Security Deposit/any other money due.
- 1.15.7 Canvassing in any form in connection with the tenders submitted by the Tenderer shall make his offer liable to rejection.
- 1.15.8 In case the Proprietor, Partner or Director of the Company/Firm submitting the Tender, has any relative or relation employed in BHEL, the authority inviting the Tender shall be informed of the fact as per specified format, along with the Offer. Failing to do so, BHEL may, at its sole discretion, reject the tender or cancel the contract and forfeit the Earnest Money/Security Deposit.
- 1.15.9 The successful tenderer should not sub-contract part or complete work detailed in the tender specification undertaken by him without written permission of BHEL's Construction Manager/Site Incharge. The tenderer is solely responsible to BHEL for the work awarded to him.
- 1.15.10 The Tender submitted by a techno commercially qualified tenderer shall become the property of BHEL who shall be under no obligation to return the same to the bidder. However unopened price bids and late tenders shall be returned to the bidders
- 1.15.11 Unsolicited discount received after the due date and time of Bid Submission shall not be considered for evaluation. However, if the party who has submitted the unsolicited discount/rebate becomes the L-I party, then the awarded price i.e contract value shall be worked out after considering the discount so offered.
- 1.15.12 BHEL shall not be liable for any expenses incurred by the bidder in the preparation of the tender irrespective of whether the tender is accepted or not.

Bharat Heavy Electricals Limited		
Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 11 OF 30

CHAPTER-2

2.1 **DEFINITION:** The following terms shall have the meaning hereby assigned to them except where the context otherwise requires

i)	BHEL shall mean Bharat Heavy Electricals Limited (of the respective Power Sector Region inviting the Tender), a company registered under Indian Companies Act 1956, with its Registered Office at BHEL HOUSE, SIRI FORT, NEW DELHI – 110 049, or its Power Sector Regional Offices or its Authorised Officers or its Site Engineers or other employees authorised to deal with any matters with which these persons are concerned on its behalf.
ii)	“EXECUTIVE DIRECTOR” or ‘GROUP GENERAL MANAGER’ or “GENERAL MANAGER (Incharge)” or “GENERAL MANAGER” shall mean the Officer in Administrative charge of the respective Power Sector Region.
iii)	“COMPETENT AUTHORITY” shall mean Executive Director or Group General Manager or General Manager (Incharge) or General Manager or BHEL Officers who are empowered to act on behalf of the Executive Director or General Manager (Incharge) or General Manager of BHEL.
iv)	“ENGINEER” or “ENGINEER IN CHARGE” shall mean an Officer of BHEL as may be duly appointed and authorized by BHEL to act as “Engineer” on his behalf for the purpose of the Contract, to perform the duty set forth in this General Conditions of Contract and other Contract documents. The term also includes ‘CONSTRUCTION MANAGER’ or ‘SITE INCHARGE’ as well as Officers at Site or at the Headquarters of the respective Power Sector Regions.
v)	“SITE” shall mean the places or place at which the plants/equipments are to be erected and services are to be performed as per the specification of this Tender.
vi)	“CLIENT OF BHEL” or “CUSTOMER” shall mean the project authorities with whom BHEL has entered into a contract for supply of equipments or provision of services.
vii)	“CONTRACTOR” shall mean the successful Bidder/Tenderer who is awarded the Contract and shall include the Contractor’s successors, heirs, executors, administrators and permitted assigns.
viii)	“CONTRACT” or “CONTRACT DOCUMENT” shall mean and include the Agreement of Work Order, the accepted appendices of Rates, Schedules, Quantities if any, General Conditions of Contract, Special Conditions of Contract, Instructions to the Tenderers, Drawings, Technical Specifications, the Special Specifications if any, the Tender documents, subsequent amendments mutually agreed upon and the Letter of Intent/Acceptance issued by BHEL. Any conditions or terms stipulated by the contractor in the tender documents or subsequent letters shall not form part of the contract unless, specifically accepted in writing by BHEL in the Letter of Intent/Award and incorporated in the agreement.
ix)	“GENERAL CONDITIONS OF CONTRACT” shall mean the ‘Instructions to Tenderers’ and ‘General Conditions of Contract’ pertaining to the work for which above tenders have been called for.

Bharat Heavy Electricals Limited		
Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 12 OF 30

x)	“TENDER SPECIFICATION” or “TENDER” or “TENDER DOCUMENTS” shall mean General Conditions, Common Conditions, Special Conditions, Price Bid, Rate Schedule, Technical Specifications, Appendices, Annexures, Corrigendums, Amendments, Forms, procedures, Site information, etc and drawings/documents pertaining to the work for which the tenderers are required to submit their offers. Individual specification number will be assigned to each Tender Specification.
xi)	“LETTER OF INTENT” shall mean the intimation by a Letter/Fax/email to the tenderer that the tender has been accepted in accordance with provisions contained in the letter. The responsibility of the contractor commences from the date of issue of this letter and all terms and conditions of the contract are applicable from this date.
xii)	“COMPLETION TIME” shall mean the period by ‘date/month’ specified in the ‘Letter of Intent/Award’ or date mutually agreed upon for handing over of the intended scope of work, the erected equipment/plant which are found acceptable by the Engineer, being of required standard and conforming to the specifications of the Contract.
xiii)	“PLANT” shall mean and connote the entire assembly of the plant and equipments covered by the contract.
xiv)	“EQUIPMENT” shall mean equipment, machineries, materials, structural, electricals and other components of the plant covered by the contract.
xv)	“TESTS” shall mean and include such test or tests to be carried out on the part of the contractor as are prescribed in the contract or considered necessary by BHEL, in order to ascertain the quality, workmanship, performance and efficiency of the contractor or part thereof.
xvi)	“APPROVED”, “DIRECTED” or “INSTRUCTED” shall mean approved, directed or instructed by BHEL.
xvii)	“WORK or CONTRACT WORK” shall mean and include supply of all categories of labour, specified consumables, tools and tackles and Plants required for complete and satisfactory site transportation, handling, stacking, storing, erecting, testing and commissioning of the equipments to the entire satisfaction of BHEL.
xviii)	“SINGULAR AND PLURALS ETC” words carrying singular number shall also include plural and vice versa, where the context so requires. Words imparting the masculine Gender shall be taken to include the feminine Gender and words imparting persons shall include any Company or Associations or Body of Individuals, whether incorporated or not.
xix)	“HEADING” – The heading in these General Conditions are solely for the purpose of facilitating reference and shall not be deemed to be part thereof or be taken as instructions thereof or of the contract.
xx)	“MONTH” shall mean calendar month unless otherwise specified in the Tender.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 13 OF 30

xxi)	Day' or 'Days' unless herein otherwise expressly defined shall mean calendar day or days of twenty four (24) hours each. A week shall mean continuous period of seven (7) days.
xxii)	"COMMISSIONING" shall mean the synchronisation testing and achieving functional operation of the Equipment with associated system after all initial adjustments, trials, cleaning, re-assembly required at site if any, have been completed and Equipment with associated system is ready for taking into service.
xxiii)	"WRITING" shall include any manuscript type written or hand written or printed statement or electronically transmitted messages, under the signature or seal or transmittal of BHEL.
xxiv)	"TEMPORARY WORK" shall mean all temporary works for every kind required in or for the execution, completion, maintenance of the work.
xxv)	'CONTRACT PRICE' or 'CONTRACT VALUE' shall mean the sum mentioned in the LOI/LOA/Contract Agreement subject to such additions thereto or deductions there from as may be made under provisions hereinafter contained
xxvi)	"COMMENCEMENT DATE" or "START DATE" shall mean the commencement/start of work at Site as per terms defined in the Tenderl
xxvii)	"SHORT CLOSING" or "FORE CLOSING" of Contract shall mean the premature closing of Contract, for reasons not attributable to the contractor and mutually agreed between BHEL and the contractor
xxviii)	"TERMINATION" of Contract shall mean the pre mature closing of contract due to reasons as mentioned in the contract
xxix)	"DE MOBILISATION" shall mean the temporary winding up of Site establishment by Contractor leading to suspension of works temporarily for reasons not attributable to the contractor
xxx)	"RE MOBILISATION" shall mean the resumption of work with all resources required for the work after demobilization.
2.2	LAW GOVERNING THE CONTRACT AND COURT JURISDICTION The contract shall be governed by the Law for the time being in force in the Republic of India. The Civil Court having original Civil Jurisdiction at Delhi for PSNR, at Kolkata for PSER, at Nagpur for PSWR and at Chennai for PSSR, shall alone have exclusive jurisdiction in regard to all claims in respect of the Contract. No other Civil Court shall have jurisdiction in case of any dispute, under this contract
2.3	ISSUE OF NOTICE 2.3.1 <u>Service of notice on contractor</u> Any notice to be given to the Contractor under the terms of the contract shall be served by sending the same by Registered Post / Speed Post to or leaving the same at the Contractor's last known address of the principal place of business (or in the event of the contractor being a company, to or at its Registered Office). In case of change of address, the notice shall be served at changed address as notified in writing by the Contractor to BHEL. Such posting or leaving of the notice shall be deemed to be good service of such notice and the time mentioned to the condition for doing any act after notice shall be reckoned from the date so mentioned in such notice. 2.3.2 <u>Service of notice on BHEL</u>

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 14 OF 30

Any notice to be given to BHEL in-charge/Region under the terms of the Contract shall be served by sending the same by post to or leaving the same at BHEL address or changed address as notified in writing by BHEL to the Contractor.

2.4 USE OF LAND

No land belonging to BHEL or their Customer under temporary possession of BHEL shall be occupied by the contractor without written permission of BHEL.

2.5 COMMENCEMENT OF WORK

2.5.1 The contractor shall commence the work as per the time indicated in the Letter of Intent from BHEL and shall proceed with the same with due expedition without delay.

2.5.2 If the contractor fails to start the work within stipulated time as per LOI or as intimated by BHEL, then BHEL at its sole discretion will have the right to cancel the contract. The Earnest Money and/or Security Deposit with BHEL will stand forfeited without any further reference to him without prejudice to any and all of BHEL's other rights and remedies in this regard.

2.5.3 All the work shall be carried out under the direction and to the satisfaction of BHEL.

2.6 MEASUREMENT OF WORK AND MODE OF PAYMENT:

2.6.1 All payments due to the contractors shall be made by e mode only, unless otherwise found operationally difficult for reasons to be recorded in writing

2.6.2 For progress running bill payments: - The Contractor shall present detailed measurement sheets in triplicate, duly indicating all relevant details based on technical documents and connected drawings for work done during the month/period under various categories in line with terms of payment as per contract. The basis of arriving at the quantities, weights shall be relevant documents and drawings released by BHEL. These measurement sheets shall be prepared jointly with BHEL Engineers and signed by both the parties.

2.6.3 These measurement sheets will be checked by BHEL Engineer and quantities and percentage eligible for payment under various groups shall be decided by BHEL Engineer. The abstract of quantities and percentage so arrived at based on the terms of payment shall be entered in Measurement Book and signed by both the parties.

2.6.4 Based on the above quantities, contractor shall prepare the bills in prescribed format and work out the financial value. These will be entered in Measurement Book and signed by both the parties. Payment shall be made by BHEL after effecting the recoveries due from the contractor.

2.6.5 All recoveries due from the contractor for the month/period shall be effected in full from the corresponding running bills unless specific approval from the competent authorities is obtained to the contrary.

2.6.6 Measurement shall be restricted to that portion of work for which it is required to ascertain the financial liability of BHEL under this contract.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 15 OF 30

- 2.6.7 The measurement shall be taken jointly by persons duly authorized on the part of BHEL and by the Contractor.
- 2.6.8 The Contractor shall bear the expenditure involved if any, in making the measurements and testing of materials to be used/used in the work. The contractor shall, without extra charges, provide all the assistance with appliances and other things necessary for measurement.
- 2.6.9 If at any time due to any reason whatsoever, it becomes necessary to re-measure the work done in full or in part, the expenses towards such re measurements shall be borne by the contractor unless such re measurements are warranted solely for reasons not attributable to contractor.
- 2.6.10 Passing of bills covered by such measurements does not amount to acceptance of the completion of the work measured. Any left out work has to be completed, if pointed out at a later date by BHEL.
- 2.6.11 Final measurement bill shall be prepared in the final bill format prescribed for the purpose based on the certificate issued by BHEL Engineer that entire works as stipulated in tender specification has been completed in all respects to the entire satisfaction of BHEL. Contractor shall give unqualified "No Claim" Certificate. All the tools and tackles loaned to him should be returned in satisfactory condition to BHEL. The abstract of final quantities and financial values shall also be entered in the Measurement Books and signed by both parties to the contract. The Final Bill shall be prepared and paid within a reasonable time after completion of work.
- 2.7 **RIGHTS OF BHEL**
BHEL reserves the following rights in respect of this contract during the original contract period or its extensions if any, as per the provisions of the contract, without entitling the contractor for any compensation.
- 2.7.1 To withdraw any portion of work and/or to restrict/alter quantum of work as indicated in the contract during the progress of work and get it done through other agencies to suit BHEL's commitment to its customer or in case BHEL decides to advance the date of completion due to other emergent reasons/ BHEL's obligation to its customer.
- 2.7.2 To terminate the contract or get any part of the work done through other agency or deploy BHEL's own/hired/otherwise arranged resources , at the risk and cost of the contractor after due notice of a period of two weeks by BHEL, in the event of:-
- i) Contractor's continued poor progress
 - ii) Withdrawal from or abandonment of the work before completion of the work
 - iii) Contractor's inability to progress the work for completion as stipulated in the contract
 - iv) Poor quality of work
 - v) Corrupt act of Contractor
 - vi) Insolvency of the Contractor
 - vii) Persistent disregard to the instructions of BHEL
 - viii) Assignment, transfer, sub-letting of contract without BHEL's written permission
 - ix) Non fulfillment of any contractual obligations
 - x) In the opinion of BHEL, the contractor is overloaded and is not in a position to execute the job as per required schedule

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 16 OF 30

- 2.7.3 To meet the expenses including BHEL overheads on the differential cost at 5%, over and above the Liquidated damages/penalties arising out of "Risk & Cost" as explained above under Sl.No. 2.7.2. BHEL shall recover the amount from any money due from Contractor, or from any money due to the Contractor including Security Deposit, or by forfeiting any T&P or material of the contractor under this contract or any other contract of BHEL or by any other means or any combination thereof
- 2.7.4 To terminate the contract or to restrict the quantum of work and pay for the portion of work executed in case BHEL's contract with their customer are terminated for any reason, as per mutual agreement.
- 2.7.5 To effect recovery from any amounts due to the contractor under this or any other contract or in any other form, the moneys BHEL is statutorily forced to pay to anybody, due to contractor's failure to fulfill any of his obligations. BHEL shall levy overheads of 5% on all such payments along with interest as defined elsewhere in the GCC.
- 2.7.6 While every endeavour will be made by BHEL to this end, they cannot guarantee uninterrupted work due to conditions beyond their control. The Contractor will not be normally entitled for any compensation/extra payment on this account unless otherwise specified elsewhere in the contract.
- 2.7.7 In case the execution of works comes to a complete halt or reaches a stage wherein worthwhile works cannot be executed and there is no possibility of commencement of work for a period of not less than two months, due to reasons not attributable to the contractor and other than Force Majeure conditions, BHEL may consider permitting the contractor to de mobilize forthwith and re mobilize at an agreed future date. Cost of such demobilization/remobilization shall be mutually agreed. ORC in such cases shall not be applicable for the period between the period of demobilization and re mobilisation. The duration of contract/time extension shall accordingly get modified suitably. In case of any conflict, BHEL decision in this regard shall be final and binding on the contractor.
- 2.7.8 In the unforeseen event of inordinate delay in receipt of materials, drawings, fronts, etc, due to which inordinate discontinuity of work is anticipated, BHEL at its discretion may consider contractor's request to short close the contract in following cases:
- The balance works (including but not limited to Trial Operation, PG Test, etc) are minor vis a vis the scope of work envisaged as per the contract.
 - There has been no significant work in past 6 months OR no significant work is expected in next 6 months (example in Hydro projects or in projects where work has stopped due to reasons beyond the control of BHEL)
 - The balance works cannot be done within a reasonable period of time as they are dependent on unit shutdown or on other facilities of customer or any other reasons not attributable to the contractor
- At the point of requesting for short closure, contractor shall establish that he has completed all works possible of completion and he is not able to proceed with the balance works due to constraints beyond his control. In such a case, the estimated value of the unexecuted portion of work (or estimated value of services to be provided for carrying out milestone/stage payments like

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 17 OF 30

Trial Operation/PG Test, etc) as mutually agreed, shall however be reduced from the final contract value.

2.7.9 LIQUIDATED DAMAGES/PENALTY

If the contractor fails to maintain the required progress of work which results in delay in the completion of the work as per the contractual completion period, BHEL shall have the right to impose Liquidated Damage/Penalty at the rate of 0. 5% of the contract value, per week of delay or part thereof subject to a maximum of 10% of the contract value. For this purpose, the period of delay shall be the delay attributable to the Contractor for the completion of work as per contract. Contract Value for this purpose, shall be the final executed value exclusive of ORC, Extra Works executed on Manday rate basis, Supplementary/Additional Items and PVC.

2.8 RESPONSIBILITIES OF THE CONTRACTOR IN RESPECT OF LOCAL LAWS, EMPLOYMENT OF WORKERS ETC.

The following are the responsibilities of the contractor in respect of observance of local laws, employment of personnel, payment of taxes etc. The subcontractor shall fully indemnify BHEL against any claims of whatsoever nature arising due to the failure of the contractor in discharging any of his responsibilities hereunder:

- 2.8.1 As far as possible, Unskilled Workers shall be engaged from the local areas in which the work is being executed.
- 2.8.2 The contractor at all times during the continuance of this contract shall, in all his dealings with local labour for the time being employed on or in connection with the work, have due regard to all local festivals and religious and other customs.
- 2.8.3 The contractor shall comply with all applicable State and Central Laws, Statutory Rules, Regulations etc. such as Payment of Wages Act, Minimum Wages Act, Workmen Compensation Act, Employer's Liability Act, Industrial Disputes Act, Employers Provident Act, Employees State Insurance Scheme, Contract Labour (Regulation and Abolition) Act 1970, Payment of Bonus & Gratuity Act and other Acts, Rules and Regulations for labour as may be enacted by the Government during the tenure of the Contract and having force or jurisdiction at Site. The Contractor shall also give to the local Governing Body, Police and other relevant Authorities all such notices as may be required by the Law.
- 2.8.4 The contractor shall obtain independent License under the Contract Labour (Regulations and Abolition Act, 1970) as required from the concerned Authorities based on the certificate (Form-V) issued by the Principal Employer/Customer
- 2.8.5 The contractor shall pay all taxes, fees, license charges, deposits, duties, tolls, royalties, commission or other charges which may be leviable on account of his operations in executing the contract.
- 2.8.6 While BHEL would pay the inspection fees and Registration fees of Boiler/Electrical Inspectorate,

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 18 OF 30

	all other arrangements for site visits periodically by the Inspectorate to site, Inspection certificate etc. will have to be made by contractor. However, BHEL will not make any payment to the Inspectorate in connection with contractor's Welders/Electricians qualification tests etc.
2.8.7	Contractor shall be responsible for provision of Health and Sanitary arrangements (more particularly described in Contract Labour Regulation & Abolition Act), Safety precautions etc. as may be required for safe and satisfactory execution of contract.
2.8.8	The contractor shall be responsible for proper accommodation including adequate medical facilities for personnel employed by him.
2.8.9	The contractor shall be responsible for the proper behavior and observance of all regulations by the staff employed by him.
2.8.10	The contractor shall ensure that no damage is caused to any person/property of other parties working at site. If any such damage is caused, it is responsibility of the contractor to make good the losses or compensate for the same.
2.8.11	All the properties/equipments/components of BHEL/their Client loaned with or without deposit to the contractor in connection with the contract shall remain properties of BHEL/their Client.
2.8.12	The contractor shall use such properties for the purpose of execution of this contract. All such properties/equipments/components shall be deemed to be in good condition when received by the contractor unless he notifies within 48 hours to the contrary. The contractor shall return them in good condition as and when required by BHEL/their Client. In case of non-return, loss, damage, repairs etc, the cost thereof as may be fixed by BHEL Engineer will be recovered from the contractor
2.8.13	In case the contractor is required to undertake any work outside the scope of this contract, the rates payable shall be those mutually agreed upon if the item rates are not mentioned in existing contract
2.8.14	Any delay in completion of works/or non achievement of periodical targets due to the reasons attributable to the contractor, the same may have to be compensated by the contractor either by increasing manpower and resources or by working extra hours and/or by working more than one shift. All these are to be carried out by the contractor at no extra cost.
2.8.15	The contractor shall arrange, coordinate his work in such a manner as to cause no hindrance to other agencies working in the same premises.
2.8.16	All safety rules and codes applied by the Client/BHEL at site shall be observed by the contractor without exception. The contractor shall be responsible for the safety of the equipment/material and works to be performed by him and shall maintain all light, fencing guards, slings etc. or other protection necessary for the purpose. Contractor shall also take such additional precautions as may be indicated from time to time by the Engineer with a view to prevent pilferage, accidents, fire hazards. Due precautions shall be taken against fire hazards and atmospheric conditions. Suitable number of Clerical staff, watch and ward, store keepers to take care of equipment/materials and construction tools and tackles shall be posted at site by the contractor till the completion of work

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 19 OF 30

under this contract.

The contractor shall arrange for such safety devices as are necessary for such type of work and carry out the requisite site tests of handling equipment, lifting tools, tackles etc. as per prescribed standards and practices.

Contractor has to ensure the implementation of Health, Safety and Environment (HSE) requirements as per directions given by BHEL/Customer. The contractor has to assist in HSE audit by BHEL/Customer and submit compliance Report. The contractor has to generate and submit record/reports as per HSE plan/activities as per instruction of BHEL/Customer

- 2.8.17 The contractor will be directly responsible for payment of wages to his workmen. A pay roll sheet giving all the payments given to the workers and duly signed by the contractor's representative should be furnished to BHEL site for record purpose, if so called for.
- 2.8.18 In case of any class of work for which there is no such specification as laid down in the contract, such work shall be carried out in accordance with the instructions and requirements of the Engineer.
- 2.8.19 Also, no idle charges will be admissible in the event of any stoppage caused in the work resulting in contractor's labour and Tools & Plants being rendered idle due to any reason at any time.
- 2.8.20 The contractor shall take all reasonable care to protect the materials and work till such time the plant/equipment has been taken over by BHEL or their Client whichever is earlier.
- 2.8.21 The contractor shall not stop the work or abandon the site for whatsoever reason of dispute, excepting force majeure conditions. All such problems/disputes shall be separately discussed and settled without affecting the progress of work. Such stoppage or abandonment shall be treated as breach of contract and dealt with accordingly
- 2.8.22 The contractor shall keep the area of work clean and shall remove the debris etc. while executing day-to-day work. Upon completion of work, the contractor shall remove from the vicinity of work, all scrap, packing materials, rubbish, unused and other materials and deposit them in places specified by the Engineer. The contractor will also demolish all the hutments, sheds, offices, etc. constructed and used by him and shall clean the debris. In the event of his failure to do so, the same will be arranged to be done by the Engineer and the expenses recovered from the contractor.
- 2.8.23 The contractor shall execute the work in the most substantial and workman like manner in the stipulated time. Accuracy of work and timely execution shall be the essence of this contract. The contractor shall be responsible to ensure that the quality, assembly and workmanship conform to the dimensions and clearance given in the drawings and/ or as per the instructions of the Engineer.
- 2.8.24 The Contractor to note that some of BHEL's T&Ps/MMDs may not be insured. The Contractor will take necessary precautions and due care to protect the same while in his custody from any damage/ loss till the same is handed over back to BHEL. In case the damage / loss is due to carelessness/ negligence on the part of the contractor, the Contractor is liable to get them repair/

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 20 OF 30

replaced immediately and in case of his failure to do so within a reasonable time, BHEL will reserve the right to recover the loss from the contractor.

2.9 PROGRESS MONITORING, MONTHLY REVIEW AND PERFORMANCE EVALUATION

- 2.9.1 A detailed plan/programme for completion of the contractual scope of work as per the time schedule given in the contract shall be jointly agreed between BHEL and Contractor, before commencement of work. The above programme shall be supported by monthwise deployment of resources viz Manpower, T&P, Consumables, etc. Progress will be reviewed periodically (Daily/Weekly/Monthly) vis a vis this jointly agreed programme. The Contractor shall submit periodical progress reports (Daily/Weekly/Monthly) and other reports/information including manpower, consumables, T&P mobilization etc as desired by BHEL.
- 2.9.2 Monthly progress review between BHEL and Contractor shall be based on the agreed programme as above, availability of inputs/fronts etc, and constraints if any, as per prescribed formats. Manpower, T&P and consumable reports as per prescribed formats shall be submitted by contractor every month. Release of RA Bills shall be contingent upon certification by BHEL Site Engineer of the availability of the above prescribed formats duly filled in and signed.
- 2.9.3 The burden of proof that the causes leading to any shortfall is not due to any reasons attributable to the contractor is on the contractor himself. The monthly progress review shall record shortfalls attributable to (i) Contractor, (ii) Force Majeure Conditions, and (iii) BHEL
- 2.9.4 Performance of the Contractor shall be assessed as per prescribed formats and shall form the basis for 'Annual/Overall Performance Evaluation' of the Contractor and also for 'Assessment of Capacity of Bidder' for Tenders where the Contractor is a bidder. BHEL reserves the right to revise the evaluation formats during the course of execution of the works

2.10 TIME OF COMPLETION

- 2.10.1 The time schedule shall be as prescribed in the Contract. The time for completion shall be reckoned from the date of commencement of work at Site as certified by BHEL Engineers
- 2.10.2 The entire work shall be completed by the contractor within the time schedule or within such extended periods of time as may be allowed by BHEL under clause 2.11

2.11 EXTENSION OF TIME FOR COMPLETION

- 2.11.1 If the completion of work as detailed in the scope of work gets delayed beyond the contract period, the contractor shall request for an extension of the contract and BHEL at its discretion may extend the Contract.
- 2.11.2 Based on the monthly reviews jointly signed, the works balance at the end of original contract period less the backlog attributable to the contractor shall be quantified, and the number of months of 'Time extension' required for completion of the same shall be jointly worked out. Within this period of 'Time extension', the contractor is bound to complete the portion of backlog attributable to the contractor. Any further 'Time extension' or 'Time extensions' at the end of the previous extension shall be worked out similarly.
- 2.11.3 However if any 'Time extension' is granted to the contractor to facilitate continuation of work and completion of contract, due to backlog attributable to the contractor alone, then it shall be without prejudice to the rights of BHEL to impose penalty/LD for the delays attributable to the contractor, in addition to any other actions BHEL may wish to take at the risk and cost of contractor.
- 2.11.4 A joint programme shall be drawn for the balance amount of work to be completed during the period of 'Time Extension', along with matching resources (with weightages) to be deployed by the contractor as per specified format. Review of the programme and record of shortfall shall be done

Bharat Heavy Electricals Limited		
Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 21 OF 30

	every month of the 'Time extension' period in the same manner as is done for the regular contract period.
2.11.5	During the period of 'Time extension', contractor shall maintain their resources as per mutually agreed program
2.11.6	At the end of total work completion as certified by BHEL Engineer, and upon analysis of the total delay, the portion of time extensions attributable to (i) Contractor, (ii) Force majeure conditions, and (iii) BHEL, shall be worked out and shall be considered to be exhausted in the same order. The total period of time extensions shall be the sum of (i), (ii) and (iii) above and shall be equal to period between the scheduled date of completion and the actual date of completion of contract. LD shall be imposed/levied for the portion of time extensions attributable to contractor and recoverable from the dues payable to the contractor.
2.12	OVERRUN COMPENSATION
2.12.1	Over Run Compensation (ORC) is payable for works done during the extension period, by way of rate revisions for periods beyond original contract period subject to the following terms and conditions.
2.12.2	Rates shall be increased by 10% for the first twelve months of one or more extensions beyond original contract period. For the next twelve months of further extensions if any, rates shall be increased as above by 10% over the previous twelve months, and similarly for each subsequent twelve months extension.
2.12.3	The amount of increase payable per month due to rate revisions is subject to a minimum of Rs 1,00,000/- per month and a maximum of Rs 10,00,000/- per month.
2.12.4	Should there be any 'Time extension' for reasons attributable only to the contractor, then the work shall be executed by the contractor at the rates applicable for the period the work was planned
2.12.5	Payment of ORC shall be regulated as follows: i) Contractor is entitled to Over Run Compensation (ORC) only for the portion of backlog attributable to BHEL. ii) 50% of the compensation as per clause 2.12.3 is allocated for deployment of resources agreed as per the joint programme drawn vide 2.11.4. Payment shall however be based on the actual deployment of resources for the month as certified by BHEL, as per weightages assigned therein iii) 50% of the compensation as per clause 2.12.3, is allocated for achieving of planned progress agreed as per the joint programme drawn vide 2.11.4. Payment shall be on pro rata basis for actual achieved quantities iv) Total Over Run Compensation shall be limited to 10% of the executed contract value as certified in Final Bill. For this purpose executed contract value excludes PVC, ORC, Supplementary/Additional Items and Extra Works done on Manday rate basis
2.12.6	Contractor shall not be entitled for any Over Run Compensation (ORC) for the portion of backlog attributable to the contractor. Such works shall be executed at the rates applicable for the period the work was planned
2.13	INTEREST BEARING RECOVERABLE ADVANCES
2.13.1	Normally no advance is payable to the contractor. However, advance payment in exceptional circumstances shall be interest bearing and secured through a Bank Guarantee and shall be limited to a maximum of 5% of contract value. This 'Interest Bearing Recoverable Advance' shall be

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 22 OF 30

payable in not less than two installments with any of the installment not exceeding 60% of the total eligible advance.	
2.13.2	In exceptional circumstances, with due justification, Competent Authority of BHEL is empowered to approve proposals for payment of additional interim interest bearing advance against Bank Guarantee, for resource augmentation towards expediting work for project implementation.
2.13.3	Bank Guarantee towards 'Interest Bearing Recoverable Advance' shall be atleast 110% of the advance so as to enable recovery of not only principle amount but also the interest portion, if so required.
2.13.4	Contractor shall establish the utilization of advance drawn before the release of next installment.
2.13.5	Payment and recovery of Interest Bearing Recoverable advance shall be at the sole discretion of BHEL and shall not be a subject matter of arbitration.
2.13.6	The rate of interest applicable for the above advances shall be the prime lending rate of State Bank of India prevailing at the time of disbursement of the advance + 2%, and such rate will remain fixed till the total advance amount is recovered
2.13.7	Unadjusted amount of advances paid shall not exceed 5% of the total contract value at any point of time. Recovery of advances shall be made progressively from each Running Bill such that the advance amounts paid along with the interest is fully recovered by the time the contractor's billing reaches 80% of contract value.
2.13.8	Recovery rate per month shall be the sum of: a. Not less than 10% of Running Bill amount b. Simple interest up to the date of RA Bill on the outstanding Principle amount/amounts
2.13.9	Contractor to submit Bank Guarantee as per prescribed formats for each of the advance and shall be valid for at least one year or the recovery duration or the balance contract period which ever is later. In case the recovery of dues does not get completed within the aforesaid BG period, the contractor shall renew the BG or submit fresh BG for the outstanding amount and the remaining recovery period.
2.13.10	BHEL is entitled to make recovery of the entire outstanding amount in case the contractor fails to comply with the BG requirement
2.14	QUANTITY VARIATION
2.14.1	The quoted rates shall remain firm irrespective of any variations in the individual quantities. No compensation becomes payable in case the variation of the final executed contract value is within the limits of Plus (+) or Minus (-) 15% of awarded contract value
2.14.2	Compensation due to variation of final executed value in excess of the limits defined in clause above, shall be as follows: i) In case the finally executed contract value reduces below the lower limit of Contract Value due to quantity variation specified above, the contractor will be eligible for compensation @ 15% of the difference between the lower limit of the contract value and the actual executed value. ii) In case the finally executed contract value increases above the upper limit of Contract Value

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 23 OF 30

due to quantity variation specified above, there will be no revision in the rates within the contract period.

2.15 EXTRA WORKS

- 2.15.1 All rectifications/modifications, revamping, and reworks required for any reasons not due to the fault of the contractor, or needed due to any change in deviation from drawings and design of equipments, operation/maintenance requirements, mismatching, or due to damages in transit, storage and erection/commissioning, and other allied works which are not very specifically indicated in the drawings, but are found essential for satisfactory completion of the work, will be considered as extra works.
- 2.15.2 Extra works arising on account of the contractor's fault, irrespective of time consumed in rectification of the damage/loss, will have to be carried out by the contractor free of cost. Under such circumstances, any material and consumable required for this purpose will also have to be arranged by the contractor at his cost.
- 2.15.3 All the extra work should be carried out by a separately identifiable gang, without affecting routine activities. Daily log sheets in the pro-forma prescribed by BHEL should be maintained and shall be signed by the contractor's representative and BHEL engineer. No claim for extra work will be considered/entertained in the absence of the said supporting documents i.e. daily log sheets. Signing of log sheets by BHEL engineer does not necessarily mean the acceptance of such works as extra works.
- 2.15.4 BHEL retains the right to award or not to award any of the major repair/rework/modification/rectification/fabrication works to the contractor, at their discretion without assigning any reason for the same
- 2.15.5 After eligibility of extra works is established and finally accepted by BHEL engineer/designer, payment will be released on competent authority's approval at the following rate.
- MAN-HOUR RATE FOR ELIGIBLE EXTRA WORKS:** Single composite average labour man-hour rate, including overtime if any, supervision, use of tools and tackles and other site expenses and incidentals, consumables for carrying out any major rework/ repairs/ rectification/ modification/ fabrication as certified by site as may arise during the course of erection, testing, commissioning or extra works arising out of transit, storage and erection damages, payment, if found due will be at Rs 60/- per man hour.
- 2.15.6 The above composite labour man hour rate towards extra works shall remain firm and not subject to any variation during execution of the work. PVC will not be applicable for extra works. Rate revision, Over Run Charges/compensation etc will not be applicable due to extra works.
- 2.15.7 **Extra Works for Civil Packages** shall be regulated as follows
- i) **Rates for Extra Works arising due to (1) non availability of BOQ (Rate Schedule), OR (2) change in Specifications of materials/works (3) rectification/modification/dismantling & re erecting etc due to no fault of Contractor, shall be in the order of the following:**

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 24 OF 30

a) Item rates are to be derived from similar nature of items in the BOQ (Rate Schedule) with applicable escalation derived from All India Consumer Price Index for Whole Sale Commodities. b) As per CPWD-DSR-2007 (or latest edition) with applicable escalation derived from All India Consumer price Index for Whole Sale Commodities, OR, Notification issued by the office of CPWD for 'Cost Index' in that Region where the project is being executed, whichever is less c) Item rates are to be worked out on the basis of prevailing market rates mutually agreed between BHEL and Contractor, plus 15% towards Contractor's overheads and profit. ii) PVC and ORC will not applicable be for (i) above.

2.16 SUPPLEMENTARY ITEMS 2.16.1 For NON Civil Works Supplementary items are items/works required for completion of entire work but not specified in the scope of work. Subject to certification of such items/works as supplementary items by BHEL Engineer, rates shall be derived on the basis of any one of the following on mutual agreement: i) Based on percentage breakup/rates indicated for similar/nearby items ii) In case (i) above does not exist, then BHEL/site may derive the percentage breakup/rates to suit the type of work 2.16.2 For Civil Works i) <u>Rates for Supplementary Works/Additional Works arising out due to additions/alterations in the original scope of works as per contract subject to certification of BHEL Engineer shall be worked out as under:</u> a) Item rates which are available in existing BOQ (Rate Schedule) shall be operated with applicable escalation derived from All India Consumer Price Index for Whole Sale Commodities b) Items of works which are not available in existing BOQ shall be operated as an 'Extra Works' and rate shall be derived as per clause no 2.15.7 ii) Execution of Supplementary Works/Additional Works through the Contractor shall be at the sole discretion of BHEL, and shall be considered as part of executed contract value for the purpose of Quantity Variation as per clause 2.14 iii) BHEL Engineer's decision regarding fixing the rate as above is final and binding on the contractor. iv) PVC and ORC will not be applicable for (i) above.

2.17 PRICE VARIATION COMPENSATION 2.17.1 In order to take care of variation in cost of execution of work on either side, due to variation in the index of LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS, Price Variation Formula as described herein shall be applicable 2.17.2 85% component of Contract Value shall be permitted to be adjusted for variation in various relevant indices during execution of work. The remaining 15% shall be treated as fixed component 2.17.3 The basis for calculation of price variation in each category, their component, Base Index, shall be as under:

SL NO.	CATEGORY	BASE INDEX	COMPONENT ('K')		
			CIVIL PACKAGES (See Note A/B/C)	MECHANICAL PACKAGES	LABOUR ORIENTED

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 25 OF 30

			A	B**	C		PACKAGES (See Note D)
i)	LABOUR (ALL CATEGORIES)	'MONTHLY ALL-INDIA AVERAGE CONSUMER PRICE INDEX NUMBERS FOR INDUSTRIAL WORKERS' published by Labour Bureau, Ministry of Labour and Employment, Government of India. (Website: labourbureau.nic.in)	40	25	30	65	80
ii)	HIGH SPEED DIESEL OIL	Name of Commodity : HSD OIL. Type : INDIVIDUAL COMMODITY (See Note F)	5	3	5	5	5
iii)	WELDING ROD	Name of Commodity : WELDING ROD Type: INDIVIDUAL COMMODITY (See Note F)				15	
iv)	CEMENT	Name of Commodity : GREY CEMENT Type: INDIVIDUAL COMMODITY (See Note F)		20	30		
v)	STEEL (Structural and Reinforcement Steel)	Name of Commodity : a1. IRON & SEMIS Type: GROUP ITEM (See Note F)		25			
vi)	MATERIALS (Other than Cement & Steel)	Name of Commodity: ALL COMMODITIES Type: GROUP ITEM (See Note F)	40	12	20		

Note: A) Cement & Steel : Free Issue (BHEL Scope)

B) Cement & Steel : In Contractor Scope {**: unless otherwise specified in Special Conditions of Contract (SCC) }

C) Cement in Contractor Scope, and Steel is Free Issue (BHEL Scope)

D) Predominantly 'Labour Oriented' packages including Material Handling & Management, Insulation, Painting, Electrical and CI or a combination thereof, which are separately tendered and awarded

E) For Composite packages (i.e. Civil+Mechanical+Electrical/CI or Civil+Mechanical or Mechanical+Electrical/CI), the components for various categories shall be as per respective packages

F) As per the 'MONTHLY WHOLE SALE PRICE INDEX' for the respective Commodity and Type, published by Office of Economic Adviser, Ministry of Commerce and Industry, Government of India. (Website : www.eaindustry.nic.in). Revisions in the index or commodity will be re adjusted accordingly.

2.17.4 Payment/recovery due to variation in index shall be determined on the basis of the following notional formula without any initial absorption, in respect of the identified components viz LABOUR, HIGH SPEED DIESEL OIL, WELDING ROD, CEMENT, STEEL, MATERIALS

$$P = K \times R \times \frac{(X_N - X_0)}{X_0}$$

Where

P = Amount to be paid/recovered due to variation in the Index for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

K = Percentage component applicable for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials

R = Value of work done for the billing month (Excluding Taxes and Duties if payable extra)

XN = Revised Index No for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials for the billing month under consideration

Xo = Index no for Labour, High Speed Diesel Oil, Welding Rod, Cement, Steel and Materials as on the Base date.

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 26 OF 30

2.17.5	Base date shall be calendar month of the latest date of submission of Tender.
2.17.6	PVC shall not be payable for the ORC amount, Supplementary/Additional Items, Extra works.
2.17.7	The contractor shall furnish necessary monthly bulletins for the necessary indices from the relevant websites along with his Bills.
2.17.8	The contractor will be required to raise the bills for price variation payments on a monthly basis along with the running bills irrespective of the fact whether any increase/decrease in the index for relevant categories has taken place or not. In case there is delay in publication of bulletins (final figure), the provisional values as published can be considered for payments and arrears shall be paid/recovered on getting the final values.
2.17.9	PVC shall be applicable for the entire original contract period plus the extended period. However the Total Quantum of Price Variation amount payable/recoverable shall be regulated as follows: i) For the portion of backlog attributable to the contractor, the PVC will be based on the average of the indices for the period of the original contract period. ii) For the period of Force Majeure, the PVC will be limited to the indices applicable at the beginning of the force majeure period. iii) For the portion of backlog attributable to BHEL, the PVC will be as per the indices applicable for the respective months iv) The total amount of PVC shall not exceed 20% of the cumulatively executed contract value. Executed contract value for this purpose is exclusive of PVC, ORC, Supplementary/Additional Items and Extra works.
2.18	INSURANCE
2.18.1	BHEL/their customer shall arrange for insuring the materials/properties of BHEL/customer covering the risks during transit, storage, erection and commissioning.
2.18.2	It is the sole responsibility of the contractor to insure his materials, equipments, workmen, etc. against accidents and injury while at work and to pay compensation, if any, to workmen as per Workmen's compensation Act. The work will be carried out in a protected area and all the rules and regulations of the client /BHEL in the area of project which are in force from time to time will have to be followed by the contractor.
2.18.3	If due to negligence and or non-observation of safety and other precautions by the contractors, any accident/injury occurs to the property / manpower belong to third party, the contractor shall have to pay necessary compensation and other expense, if so decided by the appropriate authorities.
2.18.4	The contractor will take necessary precautions and due care to protect the material, while in his custody from any damage/ loss due to theft or otherwise till the same is taken over by BHEL or customer. For lodging / processing of insurance claim the contractor will submit necessary documents. BHEL will recover the loss including the deductible franchise from the contractor, in case the damage / loss is due to carelessness / negligence on the part of the contractor. In case of any theft of material under contractor's custody , matter shall be reported to police by the contractor immediately and copy of FIR and subsequently police investigation report shall be submitted to BHEL for taking up with insurance. However this will not relieve the contractor of his

Bharat Heavy Electricals Limited		
Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 27 OF 30

contractual obligation for the material in his custody.

2.19 STRIKES & LOCKOUT

2.19.1 The contractor will be fully responsible for all disputes and other issues connected with his labour. In the event of the contractor's labour resorting to strike or the Contractor resorting to lockout and if the strike or lockout declared is not settled within a period of one month, BHEL shall have the right to get the work executed through any other agencies and the cost so incurred by BHEL shall be deducted from the Contractor's bills.

2.19.2 For all purposes whatsoever, the employees of the contractor shall not be deemed to be in the employment of BHEL

2.20 FORCE MAJEURE

The following shall amount to Force Majeure:-

2.20.1 Acts of God, act of any Government, War, Sabotage, Riots, Civil commotion, Police action, Revolution, Flood, Fire, Cyclones, Earth quake and Epidemic and other similar causes over which the contractor has no control.

2.20.2 If the contractor suffers delay in the due execution of the contractual obligation due to delays caused by force majeure as defined above, the agreed time of completion of the job covered by this contract or the obligations of the contractor shall be extended by a period of time equal to period of delay, provided that on the occurrence of any such contingency, the contractor immediately reports to BHEL in writing the causes of delay and the contractor shall not be eligible for any compensation.

2.21 ARBITRATION & RECONCILIATION

2.21.1 In case amicable settlement is not reached in the event of any dispute or difference arising out of the execution of the Contract or the respective rights and liabilities of the parties or in relation to interpretation of any provision by the Contractor in any manner touching upon the Contract, such dispute or difference shall (except as to any matters, the decision of which is specifically provided for therein) be referred to the sole arbitration of the arbitrator appointed by BHEL/In charge(Region).

The award of the Arbitrator shall be binding upon the parties to the dispute

Subject as aforesaid, the provisions of Arbitration and Reconciliation Act 1996 (India) or statutory modifications or re enactments thereof and the rules made there under and for the time being in force shall apply to the arbitration proceedings under this clause. The venue of the arbitration shall be the place from which the contract is issued or such other place as the Arbitrator at his discretion may determine

2.21.2 In case of Contract with Public Sector Enterprise (PSE) or a Government Department, the following shall be applicable :

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 28 OF 30

In the event of any dispute or difference relating to the interpretation and application of the provisions of the Contract, such dispute or difference shall be referred to by either party to the arbitration of one of the arbitrators in the department of public enterprises. The award of the arbitrator shall be binding upon the parties to the dispute, provided, however, any party aggrieved by such award may make further reference for setting aside or revision of the award to the Law Secretary, Department of Legal Affairs, Ministry of Law and Justice, Government of India. Upon such reference the dispute shall be decided by the Law Secretary or the Special Secretary or Additional Secretary when so authorized by the Law Secretary, whose decision shall bind the parties hereto finally and conclusively.

2.21.3 The cost of arbitration shall be borne equally by the parties.

2.21.4 Work under the contract shall be continued during the arbitration proceedings

2.22 RETENTION AMOUNT

2.22.1 Retention Amount shall be 5% of executed contract value and shall be recovered at the rate of 5% from each Running Bill admitted, including PVC Bills.

2.22.2 Refund of Retention Amount shall be as follows:

- i) 50% of retention amount along with 'Final Bill'
- ii) Balance 50% of retention amount shall be retained towards 'Performance Guarantee for Workmanship' and shall become refundable after expiry of Guarantee period, provided all the defects noticed during the guarantee period have been rectified to the satisfaction of BHEL Site Engineer/BHEL Construction Manager, and after deducting all expenses/other amounts due to BHEL under the contract/other contracts entered into by BHEL with them. This portion of the retention amount can be released on commencement of the Guarantee period, on submission of equivalent Bank Guarantee.

2.23 PAYMENTS

Payments to Contractors are made in any one of the following forms

2.23.1 Running Account Bills (RA Bills)

- i) These are for interim payments when the contracts are in progress. The bills for such interim payments are to be prepared by Contractor in prescribed formats (RA Bill forms).
- ii) Payments shall be made according to the extent of work done as per measurements taken up to the end of the calendar month and in line with the terms of payments described in the Tender documents
- iii) Recoveries on account of electricity, water, statutory deductions, etc are made as per terms of contract
- iv) Full rates for the work done shall be allowed only if the quantum of work has been done as per the specifications stipulated in the contract. If the work is not executed as per the stipulated specifications, BHEL may ask the contractor to re do the work according to the required specifications, without any extra cost. However, where this is not considered necessary 'OR' where the part work is done due to factors like non-availability of material to be supplied by BHEL 'OR' non availability of fronts 'OR' non availability of drawings, fraction payment against full rate, as is considered reasonable, may be allowed with due regard for the work remaining to be done. BHEL decision in this regard will be final and

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 29 OF 30

binding on the contractor. v) In order to facilitate part payment, BHEL Site Engineer at his discretion may further split the contracted rates/percentages to suit site conditions, cash flow requirements according to the progress of work	
2.23.2	Final Bill Final Bill' is used for final payment on closing of Running Account for works or for single payment after completion of works. 'Final Bill' shall be submitted as per prescribed format after completion of works as per scope and upon material reconciliation, along with the following. i) 'No Claim Certificate' by contractor ii) Clearance certificates where ever applicable viz Clearance Certificates from Customer, various Statutory Authorities like Labour department, PF Authorities, Commercial Tax Department, etc iii) Indemnity bond as per prescribed format BHEL shall settle the final bills after deducting all liabilities of Contractor to BHEL
2.24	PERFORMANCE GUARANTEE FOR WORKMANSHIP
2.24.1	Even though the work will be carried out under the supervision of BHEL Engineers the Contractor will be responsible for the quality of the workmanship and shall guarantee the work done for a period of twelve months from the date of commencement of guarantee period as defined in Special Conditions of Contract, for good workmanship and shall rectify free of cost all defects due to faulty erection detected during the guarantee period. In the event of the Contractor failing to repair the defective works within the time specified by the Engineer, BHEL may proceed to undertake the repairs of such defective works at the Contractor's risk and cost, without prejudice to any other rights and recover the same from the Guarantee money.
2.24.2	BHEL shall release the guarantee money subject to the following i) Contractor has submitted 'Final Bill' ii) Guarantee period as per contract has expired iii) Contractor has furnished 'No Claim Certificate' in specified format iv) BHEL Site Engineer/Construction Manager has furnished the 'No Demand Certificate' in specified format v) Contractor has carried out the works required to be carried out by him during the period of Guarantee and all expenses incurred by BHEL on carrying out such works is included for adjustment from the Guarantee money refundable.
2.25	CLOSING OF CONTRACTS The Contract shall be considered completed and closed upon completion of all contractual obligations and settlement of Final Bill or completion of Guarantee period whichever is later. Upon closing of Contract, BHEL shall issue a completion certificate as per standard format, based on specific request of Contractor.
2.26	REVERSE AUCTION: BHEL reserves the right to go for Reverse Auction for Price Bid Opening by BHEL appointed service provider, instead of opening the submitted sealed price bid in the conventional way. The Business Rules for Reverse Auction shall be as per BHEL guidelines issued from time to time.
2.27	SUSPENSION OF BUSINESS DEALINGS BHEL reserves the right to take action against Contractors who either fail to perform or Tenderers/Contractor who indulge in malpractices, by suspending business dealings with them in

Bharat Heavy Electricals Limited Power Sector - Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-IB	GENERAL CONDITIONS OF CONTRACT (SERVICE)	PAGE 30 OF 30

line with BHEL guidelines issued from time to time.	
2.28	OTHER ISSUES
2.28.1	Value of Non judicial Stamp Paper for Bank Guarantees and for Contract Agreement shall be not less than Rs 100/- unless otherwise required under relevant statutes.
2.28.2	In case of any conflict between the General Conditions of Contract and Special Conditions of Contract, provisions contained in the Special Conditions of Contract shall prevail.
2.28.3	Unless otherwise specified in NIT, offers from consortium/JVs shall not be considered.
2.28.4	BHEL may not insist for signing of Contract Agreements in respect of low value and short time period contracts like providing services for Hot water flushing, Chemical Cleaning, Transportation, etc

Bharat Heavy Electricals Limited Power Sector – Eastern Region, Kolkata		
TENDER NO. PSER:SCT:NBN-C2027:20		
VOLUME-ID	SPECIAL CONDITIONS OF CONTRACT (SERVICE)	PAGE1OF47

CONTENTS

SN	DESCRIPTION	Chapter	No. OF PAGES
1	General Intent of the Specifications	Chapter-I	
2	General Services to be rendered by the Bidder	Chapter-II	
3	General Technical Requirements (Codes and Standards)	Chapter-III	
4	Obligations of Contractor (In respect of Tools, Tackles, Consumables, etc employment of supervisory staff and workmen)	Chapter-IV	
5	Responsibilities of Contractor (In respect of employment of Labour, Supervisory staff, etc)	Chapter-V	
6	Material Handling, Storage, Preservation, etc	Chapter-VI	
7	Drawings and Documents	Chapter-VII	
8	Inspection and Quality	Chapter-VIII	
9	HSE & OHSAS Obligations	Chapter-IX	
10	RA Bill Payment	Chapter-X	
11	Performance Monitoring	Chapter-XI	
12	Suspension of Business Dealings	Chapter-XII	

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - I : General Intent of Specifications

1.0	INTENT OF THE SPECIFICATION
1.1	The intent of this erection specification is to provide services for execution of the project according to most modern and proven techniques and codes. The omission of specific reference to any method, equipment or material necessary for the proper and efficient services towards installation of the plant shall not relieve the contractor of the responsibility of providing such services / facilities to complete the work or portion of work awarded to him. The quoted / accepted rates / price shall deem to be inclusive of all such contingencies.
1.2	The work shall conform to dimensions and tolerances given in various drawings and documents that will be provided during erection. If any portion of works is found to be defective in workmanship and not conforming to drawings / documents or other stipulations, the contractor shall dismantle and re-do the work duly replacing the defective materials at their own cost, failing which recoveries, as determined by BHEL, shall be effected from contractor's bills.
1.3	It is not the intent of this specification to specify herein all the details of erection and commissioning. However, the system shall conform in all respects to high standards of quality and workmanship for performing the required duties in a manner acceptable to purchaser who will interpret the meaning of drawings and specifications and shall be entitled to reject any work or material, which in his judgments is not in full accordance herewith.
1.4	The omission of specific reference to any fabrication / erection or other method, equipment or material necessary for proper and efficient working of the plant shall not relieve the tenderer of the responsibility of providing such facilities to complete the work at quoted rates. Any mismatch/ defect found due to mistake in fabrication / erection shall have to be rectified by the vendor free of cost. Inspection by BHEL/Customer does not relieve vendor of his responsibility of executing quality erection.
1.5	The work covered under this specification is of highly sophisticated nature, requiring the best quality workmanship, supervision, engineering and construction management. The contractor should ensure proper planning and successful and timely completion of the work to meet the overall project schedule. The contractor must deploy adequate quantity of tools & plants, modern / latest construction aids etc. He must also deploy adequate trained, qualified and experienced supervisory staff and skilled personnel.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - I : General Intent of Specifications

1.6	Contractor shall erect and commission all the equipments and auxiliaries as per the sequence & methodology prescribed by BHEL depending upon the technical requirements. Availability of materials and fronts will decide this. BHEL Engineer's decision regarding correctness of the work and method of working shall be final and binding on the contractor. No claims for extra payment from the contractor will be entertained on the ground of deviation from the methods / sequence adopted in erection of similar sets elsewhere.
1.7	Following shall be the minimum responsibility of contractor and have to be provided within finally accepted rates / prices:
1.7.1	Provision as required of all types of labour, supervisors, engineers, watch and ward, tools & tackles, calibrated MMEs (Monitoring and Measuring Equipment) as specified and otherwise required for the work, consumables for erection, testing and commissioning including material handling
1.7.2	Achieving Proper out-turn / Turn-over as per BHEL plan and commitment.
1.7.3	Completion of work as per BHEL Schedule
1.7.4	Good quality and accurate workmanship for proper performance of the equipment
1.7.5	Repair and rectification
1.7.6	Preservation / Re-conservation of all components during storage / erection / commissioning till handing over.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - II : General Services to be rendered by the Bidder

2.0	GENERAL SERVICES TO BE RENDERED BY THE BIDDER
2.1	Services for construction, fabrication, equipment erection testing as well as trial run & commissioning of various equipment and accessories under the contract shall include but not be limited to the following:
2.2	Issuing materials from store/open yard from time to time for erection as per the construction programme. The Contractor shall be the custodian of all the materials issued till the plant/equipment is officially taken over by the owner / BHEL after complete erection any successful trial run & commissioning.
2.3	Transport of material to their respective places of erection and erection of the complete plant & equipment as supplied under this specification.
2.4	Trial run and commissioning of individual equipment / sub-systems to the satisfaction of Owner/BHEL.
2.5	Deployment of all skilled and unskilled manpower required for erection, supervision of erection, watch & ward, commissioning and other services to be rendered under this specification.
2.6	Deployment of all erection tools & tackle, construction machinery, transportation vehicles and all other implements in adequate number and size, appropriate for the erection work to be handled under scope of this specification except otherwise specified.
2.7	Supply of all consumables, eg welding electrodes, cleaning agents, diesel oil, lubricant etc as well as materials required for temporary supports, scaffolding etc as necessary for such erection work, unless specified other wise.
2.8	Providing support services for the contractor's erection staff eg construction of site offices, temporary stores, residential accommodation and transport to work site for erection personnel, watch and ward for security and safety of the materials under the Contractor's custody etc. as required.
2.9	Maintaining proper documentation of all the site activities undertaken by the Contractor as per the proforma mutually agreed with BHEL, Submission of monthly progress reports and any such document as and when desired by BHEL/owner, taking approval of all statutory authorities i.e Boiler Inspector, Factory Inspector, Inspector of Explosives etc , as applicable for respective portions of work fall under the jurisdiction of such statutes of laws.
2.10	Any other service, although not specifically called for but required for a contract of the size and nature indicated in the specification.

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter - III : General Technical Requirements (Codes and Standards)

3.0	GENERAL TECHNICAL REQUIREMENTS (CODES AND STANDARDS)
3.1	Except where otherwise specified, the plant/equipment shall comply with the appropriate Indian Standard or an agreed internationally accepted Standard Specification as mentioned elsewhere in contract specifications, each incorporating the latest revisions at the time of tendering. Where no internationally accepted standard is applicable, the Bidder shall give all particulars and details as necessary, to enable BHEL to identify all of the plant/equipment in the same detail as would be possible had there been a Standard Specification.
3.2	Where the Bidder proposes alternative codes or standards he shall include in his tender one copy (in English) of each Standard Specification to which materials offered shall comply. In such case, the adopted alternative standard shall be equivalent or superior to the standards mentioned in the specification.
3.3	In the event of any conflict between the codes and standards referred above, and the requirements of this specification, the requirements which are more stringent shall govern.
3.4	Tools used during erection and commissioning shall not be accepted except with the specific approval of the Engineer.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

4.0	OBLIGATIONS OF CONTRACTOR
4.1	CONSUMABLES & OTHER ITEMS
4.1.1	The contractor shall provide within finally accepted price / rates, all consumables (excepting those indicated in BHEL scope) like welding electrodes (including alloy steel and stainless steel), filler wires, TIG filler wires (over & above as supplied by the unit along with the plant materials, which will be given free of cost to bidder), gases (inert, welding, cutting), soldering material, dye penetrants, radiography films, etc. Other erection consumables such as tapes, jointing compound, grease, mobile oil, M-seal, Araldite, petrol, CTC / other cleaning agents, grinding and cutting wheels are to be provided by the contractor. Steel, packers, shims, wooden planks, scaffolding materials hardware items etc required for temporary works such as supports, scaffoldings are to be arranged by the contractor. Sealing compounds, gaskets, gland packing, wooden/concrete sleepers, for temporary work, required for completion of work except those which are specifically supplied by manufacturing unit are also to be arranged by the contractor.
4.1.2	All the shims, gaskets and packing, which go finally as part of plant equipment, shall be supplied by BHEL free of cost.
4.1.3	It shall be the responsibility of the contractor to plan the activities and store sufficient quantity of consumables. Non-availability of any consumable materials or equivalent suggested by BHEL cannot be considered as reason for not attaining the required progress or for additional claim.
4.1.4	<u>TIG Filler wire for Boiler and Filler wires for Electrodes for P91/T91 piping:</u> These shall be supplied by BHEL free of cost as supplied by BHEL Manufacturing Units as part of regular supply. Required quantity as arrived at by calculation / standards will only be supplied. It would be the contractors' responsibility to account for the consumption of these filler wires. Additional consumption beyond standard / calculated quantity will be at cost recovery basis only unless and otherwise accounted for. Surplus quantity of TIG filler wire, if any, shall be properly stored and returned to BHEL stores.
4.1.5	It shall be the responsibility of the contractor to obtain prior approval of BHEL, regarding suppliers, type of electrodes etc before procurement of welding electrodes. On receipt of electrodes at site these shall be subjected to inspection and approval by BHEL. The contractor shall inform BHEL details regarding type of electrodes, batch number, date of expiry etc and produce test certificate for each lot / batch with correlation of batch / lot number with respective test certificate. No

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	electrode without a valid test certificate will to be used.
4.1.6	BHEL reserves the right to reject the use of any consumable including electrodes, gases, lubricants / special consumables if it is not found to be of the required standard / make / purity or when shelf life has expired. Contractor shall ensure display of shelf life on consumable wherever required and records maintained.
4.1.7	Storage of all consumables including welding electrodes shall be done as per requirement / instruction of the Engineer by the contractor at his cost.
4.1.8	In case of improper arrangement for procurement of any consumable, BHEL reserves the right to procure the same from any source and recover the cost from the Contractor's first subsequent bill at market value plus the departmental charges of BHEL from time to time. Postponement of such recovery is normally not permitted. The decision of Engineer in this regard shall be final and binding on the Contractor.
4.1.9	All lubricants and chemicals required for pre-commissioning, commissioning, testing, preservation and lubricants for trial runs of the equipment shall be supplied by BHEL / BHEL's client. All services including labour and T&P will be provided by the contractor for handling, filling, emptying, refilling etc. The consumption of lubricants / chemicals shall be properly accounted for. Surplus material if any shall be properly stacked/tagged and returned to BHEL/ CUSTOMER stores at no extra cost to BHEL. BHEL reserves the right to recover costs for wastage by the contractor.
4.1.10	Transportation of oil drums, from stores, filling of oil for flushing, first filling, subsequent changeover if any, topping/making up till the unit is fully commissioned and handed over to customer is included in scope of this contract. The contractor shall have to return all the empty drums to BHEL / BHEL's client store at no extra cost. Any loss / damage to above drums shall be to contractor's account.
4.1.11	All charges on account of Octroi, terminal or sales tax and other duties on materials obtained from any source for carrying out the works in the scope of the contractor shall be borne by the contractor.
4.2	TOOLS AND PLANTS / MONITORING AND MEASURING EQUIPMENT (MMEs)
4.2.1	T&Ps and MMEs to be provided by Contractor
4.2.1.1	All T&Ps and MMEs excepting those specifically indicated in BHEL scope are to be provided by the Contractor. Contractor has to make his own arrangement at his cost for completing the formalities (including arrangement of Road permits, if any) if required with Sales Tax/VAT authorities, for bringing their materials, plants and

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	equipments at site for the execution of work under this contract.
4.2.1.2	All suitable cranes, lifting and transport equipments for material handling at stores/yard/siding of BHEL/Customer are included in scope. BHEL's cranes will not be available for this purpose unless otherwise specifically permitted as per contract conditions
4.2.1.3	All T&Ps to be deployed by the contractor shall have the approval of BHEL Engineer with regard to brand, quality and specification.
4.2.1.4	Indicative list of Major T&Ps in the scope of Contractor are given in the Technical Conditions of Contract. Bidders to note that these are only indicative and as such all other T&P necessary for timely and satisfactory completion of work in scope shall be mobilized by Contractor
4.2.1.5	Timely deployment of adequate T&Ps is the responsibility of the contractor. The contractor shall be prepared to augment the T&P at short notice to match the planned programme and to achieve the milestones.
4.2.1.6	Contractor shall maintain and operate his tools and plants in such a way that major breakdowns are avoided. In the event of major breakdown, contractor shall make alternative arrangements expeditiously so that the progress of work is not hampered.
4.2.1.7	In the event of contractor failing to arrange the required tools, plants, machinery, equipment, material or non-availability of the same owing to breakdown, BHEL will make alternative arrangement at the risk and cost of the contractor. Decision of BHEL shall be final and binding on the contractor
4.2.1.8	The T&P to be arranged by the contractor shall be in proper working condition and their operation shall not lead to unsafe condition. The movements of cranes, and other equipment should be such that no damage / breakage occurs to foundations, other equipments, material, property and men. All arrangements for the movement of the T&P etc shall be the contractor's responsibility.
4.2.1.9	Use of welding generators/ rectifiers only shall be permitted for welding. Use of welding transformers will be subject to specific approval of BHEL engineer.
4.2.1.10	The contractor at his cost shall carry out periodical testing of his construction equipments. Test certificates shall be furnished to BHEL.
4.2.1.11	Contractor shall ensure deployment of serviced and healthy T&Ps including cranes, lifting tackles, wire ropes, manila ropes, winches and slings etc. History card and maintenance records for major T&Ps will be maintained by the contractor and will be made available to BHEL Engineer for inspection as and when required.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	Fitness certificate / Test Certificates of T&P shall have to be submitted before it is put in use. Identification for such T&Ps will be done as per BHEL Engineer's advice. BHEL reserves the right to permit only new slings up to 20 mm and lifting tackles up to 3 MT capacities.
4.2.1.12	Contractor shall ensure deployment of reliable and calibrated MMEs (Inspection measuring and Monitoring equipment). The MMEs shall have test / calibration certificates from authorized / Government approved / accredited agencies traceable to National / International standards. Each MME shall have a label indicating calibration status i.e. date of calibration, calibration agency and due date for calibration. A list of such instruments deployed by contractor at site with its calibration status is to be submitted to BHEL Engineer for control.
4.2.1.13	Re-testing / re-calibration shall also be arranged at regular intervals during the period of use as advised by BHEL Engineer within the contract price. The contractor will also have alternate arrangements for such MME so that work does not suffer when the particular instrument is sent for calibration. If any MMEs not found fit for use, BHEL shall have the right to stop the use of such item. It will be necessary for the contractor to deploy proper item. Any readings taken by the defective instrument will be recalled and repeat the readings taken by that instrument with a proper one. In case he fails to do so, BHEL may deploy MMEs and retake the readings at contractor's cost.
4.2.1.14	BHEL shall have lien on all T&P, MMEs and other equipment of the contractor brought to the site for the purpose of erection, testing and commissioning. BHEL shall continue to hold the lien on all such items throughout the period of contract / extended period. The contractor and / or his sub-contractors, without the prior written approval of the Engineer, shall remove no material brought to the site.
4.2.1.15	The month wise T&P deployment plan to execute the work is to be submitted as per relevant format as per the instruction of BHEL. It shall be the contractor's responsibility to deploy the required T&P, for timely and successful completion of the job, to any extent.
4.2.2	Obligations in respect of T&Ps and MMEs provided by BHEL
4.2.2.1	T&P / MMEs being provided by BHEL to sub-contractor free of hire charges shall be shared by other subcontractors working for BHEL at site and the allotment done by BHEL Engineer shall be final and binding.
4.2.2.2	BHEL T&P will be issued in basic assembled condition. Additional loose components / sub-assemblies / attachments as and when necessary, will be

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	issued by BHEL. Assembly of such additional loose components/sub-assemblies/ attachments is in contractor's scope.
4.2.2.3	In case of non-availability of the T&Ps to be provided by BHEL due to breakdown, major overhauls, distribution pattern or any other reason, the contractor shall plan / amend / alter his activities to meet erection / commissioning targets in consultation with BHEL.
4.2.2.4	void
4.2.2.5	The contractor shall engage trained and experienced operators for the operation of BHEL's T&Ps. Their skill / performance will be checked by BHEL Engineer before they are allowed to operate the same. However checking of skills by BHEL does not absolve the contractor of his responsibilities for proper and safe handling of equipment, consistent good performance of operators and regular performance evaluation of operators.
4.2.2.6	The day to day operation and maintenance of BHEL's T&Ps (Other than cranes) shall be carried out by contractor as per manufacturer's / BHEL's maintenance schedule at his cost. The contractor shall arrange, at his own cost, trained operators, fuel and other consumables for their operation. BHEL shall arrange all spares needed for upkeep of major T&Ps provided like Huck Bolting Machine*, DG Set, Induction Machine and Hydraulic Test pumps. The contractor has to arrange for fixing of the spares; supervision in specialized cases will be provided by BHEL. For upkeep of all other T&Ps supplied by BHEL, spares shall be arranged by the Contractor. BHEL supplied T&Ps shall be maintained in good working condition during the entire period of use. T&Ps in defective / damaged condition shall be rectified promptly to the full satisfaction of BHEL engineer. Contractor shall maintain records for maintenance of major T&Ps. These shall be made available for Inspection whenever required. In case of any lapses on the part of the contractor, BHEL at its own discretion shall get the servicing / repair of equipment done at the risk and cost of the contractor along with BHEL overheads. Further, if there are breakdowns / damages due to negligence of the contractor, the complete service / repair charges and cost of all the spares damaged with BHEL overheads shall be recovered from contractor's RA bills. *: for operation and maintenance of ESP Huck bolting machine, BHEL shall provide the basic power rig and hose. Balance toolingsie Guns, chuck jaws etc are to be arranged by contractor.
4.2.2.7	void

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

4.2.2.8	Increasing / shortening of the crane boom to suit work requirements shall have to be arranged by the indenting contractor at his cost including restoration to a state as directed by BHEL. All necessary manpower tools, support, consumables, illumination etc. will have to be arranged by contractor at his cost. If required, contractor has to return the crane with original boom.
4.2.2.9	The area and infrastructure development of the area to be carried out by the customer. However in construction projects of this magnitude it is possible that all the areas / approaches may not be ready. In such cases backfilling of approaches where ever necessary, consolidation of ground and arrangement of sleepers / sand bag filling etc for safe operation / movement of equipment including cranes / trailers etc shall be the responsibility of the contractor at his cost. No compensation on this account shall be payable.
4.2.2.10	In the event of contractor not using and maintaining BHEL T&Ps according to BHEL's instructions. BHEL will have the right to withdraw such item without any notice and no claim in this regard shall be entertained and contractor shall be responsible for delay in execution on this account.
4.2.2.11	The contractor shall furnish regular utilization report of the BHEL T&Ps, as per requirement of BHEL.
4.2.2.12	Any loss / damage to any part of BHEL T&Ps and MMEs shall be to the contractor's account and any expenditure on these accounts by BHEL will be recovered from the contractor's bill in case the contractor fails to make good the loss.
4.2.2.13	It shall be responsibility of the contractor to take delivery of T&Ps and MMEs from stores or place of use by other contractor at project site, transport the same to site and return the same to BHEL store / place as intimated by Engineer in project site in good working conditions after use.
4.2.2.14	The contractor shall return BHEL T&Ps and MMEs issued to him in good working condition as and when desired by BHEL (on completion or reduction of workload). If contractor delays return of T&P and MME, hire charges as applicable shall be levied by BHEL from time, it was requisitioned till the time of actual return. T&Ps and MMEs returned in damaged / unserviceable condition shall be got repaired by BHEL at its own discretion and entire cost of repair with BHEL overheads shall be recovered from the contractor.
4.2.2.15	Replacement cost including BHEL overheads in respect of irreparable / completely damaged / non return of T&Ps and MMEs shall be recovered from the

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	contractor's running / final bills
4.2.2.16	Obligations in respect of Cranes provided by BHEL
a)	BHEL will make available the cranes (as per Technical Conditions of Contract) free of charge to the contractor on sharing basis mainly for the purposes enumerated/indicated therein. BHEL cranes have to be shared with other agencies / contractors of BHEL. The allocation of cranes shall be the discretion of BHEL engineer, which shall be binding on the contractor.
b)	BHEL Cranes may be initially issued in basic assembled condition. Any alteration/addition like boom reduction / extension, assembly of components/sub-assemblies needed for modulating the capacity/reach/other features of cranes and restoration to the state as directed by BHEL shall be the contractor's responsibility.
c)	In case the BHEL cranes are not covered under AMC of BHEL, then the day-to-day upkeep and running maintenance like filling / topping up of lubricants, changing filters, etc including repair of self starter and dynamo of these cranes shall be the responsibility of the contractor. If on checking it is found that the same is not followed, BHEL will exercise its right to get the job/works done at the risk and cost of contractor. In case BHEL cranes are covered under AMC awarded by BHEL, then the day-to-day upkeep and running maintenance as described above are excluded from scope. However any additional helpers if any required during Preventive/Breakdown Maintenance, Assembly/disassembly shall be provided by contractor at no extra cost. BHEL may also provide cranes through crane hiring agencies in which case the day-to-day upkeep and running maintenance shall be excluded from scope of contractor.
d)	Minor consumables like cotton cloth, cotton waste, etc is to be supplied by Contractor. All spares and lubricants/grease is excluded from scope. Contractor to give the requirements of these items well in advance in case the cranes provided by BHEL are BHEL owned cranes.
e)	Unless otherwise specified, trained operators for BHEL owned cranes shall be provided by the contractor. These operators should possess valid license for heavy vehicle.
f)	BHEL cranes will be withdrawn for regular and capital maintenance as per the respective schedule of maintenance. As far as possible such schedules will be intimated to the contractor in advance and may be adjusted depending on the work

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IV : Obligations of Contractor

	requirements at site. However no claim whatsoever will be entertained on account of non-availability of cranes.
g)	Where the services of the cranes provided by BHEL are to be shared by other agencies/ contractors of BHEL, the contractor's responsibilities defined above will also be apportioned accordingly to the beneficiary agency. Working arrangements in this regard will be done at site by BHEL engineer and in any case his decision shall be final and binding.
h)	Major breakdowns will be attended to by BHEL. However, in case of breakdowns or damages due to negligence of the contractor, the complete service/repair charges including cost of spares shall be to the account of the contractor, along with BHEL overheads.
4.2.2.17	Obligations in respect of Construction Lift/Elevators provided by BHEL
a)	The total erection including commissioning, maintenance, statutory clearances shall be included in scope of work. Supervision by the original equipment supplier or their authorized agency shall be arranged for by BHEL, in case found necessary.
b)	All day to day and routine maintenance and checking is to be carried out by the contractor as per the recommendations of the supplier. He should periodically check the brakes and carry out the all works to ensure the safety of all those using the lift/elevator. BHEL shall arrange spares required for upkeep of Construction lift/elevator
c)	The construction lift/elevator should never be overloaded as this can lead to serious accidents. Ensuring all safety aspects in operation of the lift shall be the responsibility of the contractor. Erection of all the required number of landing platforms is included in scope. Landing platforms are to be provided with proper barricades and hand railings.
d)	After completion of contractual scope of work or as per BHEL advice, the temporary elevator/lift shall be dismantled and handed over to BHEL neatly identified/tagged. Temporary structures/platforms etc erected for the elevators/lifts are also to be dismantled and materials to be returned to stores as applicable. The construction and dismantling of the foundations required for the construction/elevator lifts is included in the scope of the contractor.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – V : Responsibilities of Contractor in respect of Labour, Supervisory Staff, etc.

5.0	RESPONSIBILITIES OF CONTRACTOR IN RESPECT OF LABOUR, SUPERVISORY STAFF, ETC.
5.1	Refer relevant clauses of General Conditions of Contract (GCC) also in this regard
5.2	The contractor shall deploy all the necessary skilled/semiskilled/ unskilled labour including highly skilled workmen etc. These workmen should have previous experience on similar job. They shall hold valid certificates wherever necessary. BHEL reserves the right to insist on removal of any employee of the contractor at any time if he is found to be unsuitable and the contractor shall forthwith remove him.
5.3	Contractor shall also comply with the requirements of local authorities/ project authorities calling for police verification of antecedents of the workmen, staff etc.
5.4	It is the responsibility of the contractor to engage his workmen in shifts and or on overtime basis for achieving the targets set by BHEL. This target may be set to suit BHEL's commitments to its customer or to advance date of completion of events or due to other reasons. The decision of BHEL in regard to setting the erection and commissioning targets will be final and binding on the contractor.
5.5	Contractor shall provide at different elevation suitable arrangement for urinal and drinking water facility with necessary plumbing & disposal arrangement including construction of septic tank. These installations shall be maintained in hygienic condition at all times.
5.6	The Contractor in the event of engaging 20 or more workmen, shall obtain Independent license under the Contract labour (Regulation and Abolition) Act 1970 from the concerned authorities based on Form-V issued by the Principal Employer/Customer. In order to issue Form-V by Customer, Contractor shall fulfill all Statutory requirements like Insurance Policy, PF Code/PF Account number etc as per the requirement of BHEL/Customer
5.7	Contractor shall deduct the necessary amount towards Provident Fund and contribute equal amount as per Government of India laws. This amount will be deposited regularly to the provident Fund Commissioner. BHEL/Customer may insist for submission of the account code duly certified by PF Commissioner
5.8	Contractor may also be required to comply with provisions of ESI Act in vogue if applicable and submit evidence to BHEL.
5.9	BHEL / customer may insist for witnessing the regular payment to the labour. They may also like to verify the relevant records for compliance with statutory

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – V : Responsibilities of Contractor in respect of Labour, Supervisory Staff, etc.

	requirements. Contractor shall enable such facilities to BHEL / Customer.
5.10	Contractor shall deploy only qualified and experienced engineers/ supervisors. They shall have professional approach in executing the work.
5.11	The contractor's supervisory staff shall execute the work in the most professional manner in the stipulated time. Accuracy of work and aesthetic finish are essential part of this contract. They shall be responsible to ensure that the assembly and workmanship conform to dimensions and tolerances given in the drawings/instructions given by BHEL engineer from time to time.
5.12	The supervisory staff employed by the contractor shall ensure proper outturn of work and discipline on the part of the labour put on the job by the contractor. Also in general they should see that the works are carried out in a safe and proper manner and in coordination with other labour and staff employed directly by BHEL or other contractors of BHEL or BHEL's client.
5.13	It is the responsibility of the contractor to arrange gate pass for all his employees, T&P etc for entering the project premises. Necessary coordination with customer officials is the responsibility of the contractor. Contractor to follow all the procedures laid down by the customer for making gate passes. Where permitted, by customer / BHEL, to work beyond normal working hours, the contractor shall arrange necessary work permits for working beyond normal working hours.
5.14	The actual deployment will of Labour and Engineer/supervision staff shall be so as to satisfy the erection and commissioning targets set by BHEL. If at any time, it is found that the contractor is not in a position to deploy the required engineers/supervisors/workmen due to any reason, BHEL shall have the option to make alternate arrangements at the contractor's risk and cost. The expenditure incurred along with BHEL overheads thereon shall be recovered from the contractor
5.15	Contractor shall not deploy women labour at night.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

6.0	MATERIAL HANDLING, STORAGE AND PRESERVATION ETC
6.1	MATERIAL HANDLING AND STORAGE
6.1.1	All the equipments/materials furnished under this contract shall be received from the project stores, sheds / storage yards and transported to pre assembly area / erection site and stored in the storage spaces in a manner so that they are easily retrievable till the contractor erects them. While drawing/lifting material from BHEL / customer stores, the contractor shall ensure that the balance / other materials are stacked back immediately. No claim is admissible on this account
6.1.2	While BHEL will endeavor to store / stack / identify materials properly in their open / close / semi closed / tarpaulins covered storage yard / shed, it shall be contractor's responsibility to assist BHEL in identifying materials well in time for erection. They should take the delivery of the same, following the procedure indicated by BHEL, and transport the material safely to pre-assembly yard / erection site in time, according to program.
6.1.3	The contractor shall take delivery of components, equipment / consumables from storage area after getting the approval of BHEL Engineer on standard indent forms.
6.1.4	The contractor shall identify and deploy necessary Engineers / supervisors / workmen for the above work in sufficient number as may be needed by BHEL, for areas covering their scope.
6.1.5	All the equipment shall be handled very carefully to prevent any damage or loss. No untested wire ropes / slings etc. shall be used for unloading / handling. The equipment shall be properly protected to prevent damage either to the equipment or to the floor where they are stored. The equipment from the stores shall be moved to the actual location at the appropriate time so as to avoid damage of such equipment at site.
6.1.6	Contractor shall ensure that while lifting slings shall be put over the points indicated on the equipment or as indicated in the manufacturer's drawings. Slings / shackles of proper size shall be used for all lifting and rigging purposes. All care shall be taken to safe guard the equipment against any damage. Dragging of piping / valves should be avoided. In case of any damage the cost shall be covered from the contractor.
6.1.7	Approach road conditions from the stores / yards to the erection site may not

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

	be equipped and ideal for smooth transportation of the equipment. Contractor may have to be adequately prepared to transport the materials under the above circumstances without any extra cost. . The contractor may familiar himself with soil conditions at site.
6.1.8	Contractor shall be responsible for examining all the plant and materials issued to him and notify the Engineer immediately of any damage, shortage, discrepancy etc before they are moved out of the stores / storage area. The contractor shall be solely responsible for any shortages or damages in transit, handling, storage and erection of the equipment once received by him. As the erection work will be spread in different areas / locations of the project, contractor has to arrange sufficient number of watch / ward personal to avoid any pilferage of material
6.1.9	The contractor shall maintain an accurate and exhaustive record-detailing out the list of all equipment received by him for the purpose of erection and keep such record open for the inspection of the engineer at any time.
6.1.10	All the material in the custody of contractor and stored in the open or dusty locations must be covered with suitable weather proof / fire retardant covering material wherever applicable and shall be blocked up on raised level above ground. All covering materials including blocks and sleeper shall be arranged by the contractor at his cost.
6.1.11	If the material belonging to the contractor are stored in area other than those earmarked for his operation the engineer will have the right to get it moved to the area earmarked for the contractor at the contractors risk and cost.
6.1.12	The contractor shall be responsible for making suitable indoor storage facilities to store all equipment (drawn by the contractor from BHEL / customer stores), which require indoor storage till the time of their installation. The Engineer will direct the contractor in this regard, which item in his opinion will require indoor storage, and the contractor shall comply with Engineer's decision.
6.1.13	The contractor shall ensure that all surplus / damaged / scrap / unused material, packing wood / containers/ special transporting frames etc are returned to BHEL at a place in project area identified by the Engineer. The contractor will maintain an account for all items received and returned to BHEL. Any shortage in returning such items shall be chargeable to the contractor except allowable wastage for packing wood only.
6.1.14	The contractor shall hand over all parts / materials remaining extra over the normal requirement with proper identification tags to the stores as directed by

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VI: Material Handling, Storage & preservation

	the concerned BHEL engineer.
6.1.15	The contractor shall ensure that all the packing materials and protective devices installed on equipment during transit and storage are removed before installation.
6.1.16	It shall be the responsibility of the contractor to keep the work / storage areas in neat, tidy and working conditions. All surplus/unusable packing and other materials shall be removed and deposited at location(s) specified by BHEL within the project premises. If required weighing of the same within the project premises will have to be carried out.
6.2	PRESERVATION OF COMPONENTS
6.2.1	After taking delivery from BHEL / customer's stores, plant materials storage shall be subjected to the following protection besides other provisions indicated in these specifications elsewhere.
6.2.1.1	Items stored outdoors shall be stacked up at least six inches (6") off the ground. Items should not be stored in a low lying area where water logging is a possibility. Contractor should have sufficient numbers of wooden / concrete / steel sleepers for the job.
6.2.1.2	Motors, valves, electrical equipment, control equipment and instruments, and special or precision items requiring special care, etc shall be stored indoors. Motor windings shall be kept dry by use of external heat or space heaters.
6.2.1.3	Bearings and other wearing surfaces of plant materials shall be protected against corrosion and kept clean and should be regularly monitored.
6.2.1.4	Insulation materials shall be stored indoors or otherwise protected against getting wet/ damaged, using suitable measures and should be protected from direct rain.
6.2.2	It shall be the responsibility of the contractor to apply preservatives / touch up paints (primer) on equipment handled and erected by him till such time of final painting. It shall be contractor's responsibility to arrange for required paints (primer), thinners, labour, scaffolding materials, cleaning materials like wire brush, emery sheets, etc, cleaning of surface and provide one coat of preservatives / paints (primer) from time to time as decided by BHEL engineer. The accepted rate shall include this work also. It is to be noted that such painting may have to be done as and when required till such time the final painting is carried out.
6.2.3	The contractor shall effectively protect the finished work from action of weather

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter – VI: Material Handling, Storage & preservation

	and from damage or defacement and shall cover the finished parts then and there for their protection.
6.2.4	Any failure on the part of contractor to carry out works according to above clauses will entail BHEL to carry out the job from any other party and recover the cost from contractor.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VII: Drawings and documents

7.0	DRAWINGS AND DOCUMENTS
7.1	The detailed drawings, specifications available with BHEL engineers will be made available to the contractor during execution of work at site. The contractor will also ensure availability of all drawings / documents at work place.
7.2	Necessary drawings to carry out the erection work will be furnished to the contractor by BHEL on loan, which shall be returned to BHEL Engineer at site after completion of work. Contractor shall ensure safe storage and quick retrieval of these documents.
7.3	The contractor shall maintain a record of all drawings and documents available with him in a register as per format given by BHEL Engineer. Contractor shall ensure use of pertinent drawings / data / documents and removal of obsolete ones from work place and returning to BHEL.
7.4	The data furnished in various annexure enclosed with this tender specification are only approximate and for guidance. However, the change in the design and in the quantity may occur as is usual in any such large scale of work. The contractors quoted rates shall be inclusive of the above factor
7.5	Should any error or ambiguity be discovered in the specification or information the contractor shall forthwith bring the same to the notice of BHEL before commencement of work. BHEL's interpretation in such cases shall be final and binding on the contractor.
7.6	Deviation from design dimensions should not exceed permissible limit. The contractor shall not correct or alter any dimension / details, without specific approval of BHEL.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

8.0	INSPECTION AND QUALITY
8.1	Inspection, Quality Assurance, Quality Control
8.1.1	Preparation of quality assurance log sheets and protocols with customer/ consultants/statutory authority, welding logs, NDE records, testing & calibration records and other quality control and quality assurance documentation as per BHEL engineer's instructions, is within the scope of work/specification. These records shall be submitted to BHEL/customer for approval from time to time.
8.1.2	The protocols between contractor and customer/ BHEL shall be made prior to installation for correctness of foundations, materials, procedures, at each stage of installation, generally as per the requirement of customer/ BHEL. This is necessary to ensure elimination of errors or keeping them within tolerable limits and to avoid accumulation and multiplication of errors.
8.1.3	A daily log book should be maintained by every supervisor/engineer of contractor on the job in duplicate (one for BHEL and one for contractor) for detailing and incorporating alignment/clearance / centering / leveling readings and inspection details of various equipments etc. High pressure welding details like serial number of weld joints, welders name, date of welding, details of repair, heat treatment etc. will be documented in welding log as per BHEL Engineer's instructions. Record of radiography containing details like serial number of weld joints, date of radiography, repairs, if any, re-shots etc shall also be maintained as per BHEL Engineer's instructions. Record of heat treatments performed shall be maintained as prescribed by BHEL
8.1.4	The performance of welders will be reviewed from time to time as per the BHEL standards. Welders' performance record shall be furnished periodically furnished for scrutiny of BHEL's Engineer. Corrective action as informed by BHEL shall be taken in respect of those welders not conforming to these standards. This may include removal/ discontinuance of concerned welder(s). Contractor shall arrange for the alternate welders immediately
8.1.5	All the welders shall carry identity cards as per the proforma prescribed by BHEL/Customer/Consultant. Only welders duly authorized by

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	BHEL/customer/consultant shall be engaged on the work.
8.1.6	Contractor shall provide all the Measuring Monitoring Equipments (MMEs) required for completion of the work satisfactorily. These MMEs shall be of brand, quality and accuracy specified by BHEL Engineer and should have necessary calibration and other certificates as per the requirement of BHEL Engineer. Decision of BHEL Engineer regarding acceptance or otherwise of the measuring instruments/gauges/tools for the work under this specification, is final and binding on the contractor. BHEL may give an indicative list of MMEs required for this work and to be made available by the contractor. The list will be reviewed by BHEL and the contractor shall meet any augmentation needed wherever required.
8.1.7	It is the responsibility of the contractor to prove the accuracy of the testing/measuring/calibrating equipments brought by him based on the periodicity of calibration as called for in the BHEL's quality assurance standards/BHEL Engineer's instructions.
8.1.8	Any re-laying or re-termination of cables/re-erection of instruments/recalibration of instruments etc. required due to contractor's mistake or design requirement and found at any stage inspection, shall be carried out by the contractor at no extra cost.
8.1.9	BHEL, Power Sector Regions (PSNR/PSER/PSWR/PSSR) have already been accredited with ISO 9001 certification and as such this work is subject to various audits to meet ISO 9001 requirements. One particular aspect which needs special mention is about arrangement of calibration of instruments by the contractor. Contractor shall ensure deployment of reliable and calibrated MMEs (Measuring and Monitoring Equipments). The MMEs shall have test / calibration certificates from authorised / Government approved / Accredited agencies traceable to National / International Standards. Re-testing / re-calibration shall also be arranged at regular intervals during the period of use as advised by BHEL Engineer within the contract price. The contractor will also have alternate arrangements for such MMEs so that work does not suffer when the particular equipment / instrument is sent for calibration. Also if any MMEs not found fit for use, BHEL shall have the right to stop the use of such item and instruct the contractor to deploy proper item and recall ie repeat the readings taken by that instrument, failing which BHEL may deploy MME and retake the readings at Contractor's cost.
8.1.10	Re-work necessitated on account of use of invalid MMEs shall be entirely to the

Bharat Heavy Electricals Limited

Power Sector – Eastern Region, Kolkata

VOLUME-ID

TENDER NO. PSER:SCT:NBN-C2027:20

PAGE 22 OF 47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	contractor's account. He shall be responsible to take all corrective actions, including resource augmentation if any, as specified by BHEL to make-up for the loss of time.
8.1.11	In the courses of erection, it may become necessary to carry repeated checks of the work with instruments recently calibrated, re-calibrated. BHEL may counter/ finally check the measurements with their own MMEs. Contractor shall render all assistance in conduct of such counter/final measurements.
8.1.12	Total Quality is the watchword of the work and Contractor shall strive to achieve the Quality Standards, procedures laid down by BHEL. He shall follow all the instructions as per BHEL drawings and Quality Standards.
8.2	Stage Inspection By FES/QA Engineers
8.2.1	Apart from day-to-day inspection by BHEL Engineers stationed at Site and Customer's Engineers, stage inspection of equipments under erection and commissioning at various stages shall also be conducted by teams of Engineers from Field Engineering Services of BHEL's Manufacturing Units, Quality Assurance teams from Field Quality Assurance, Unit/Factory Quality Assurance and Commissioning Engineers from Technical Services etc. Contractor shall arrange all labour, tools and tackles etc along with proper access for such stage inspections free of cost.
8.2.2	Any modifications suggested by BHEL FES and QA Engineers' team shall be carried out. Claims of contractor, if any, shall be dealt as per Section 13, and provided such modifications have not arisen for reasons attributable to the contractor.
8.3	Statutory Inspection of Work
8.3.1	The work to be executed under these specifications has to be offered for inspection, at appropriate stages of work completion, to various statutory authorities for compliance with applicable regulations. The work related statutory inspections, though not limited to, are as under: 1) Inspectorate of Steam Boilers and Smoke Nuisance 2) Electrical Inspector 3) Factory Inspector, Labour Commissioner, PF Commissioner and other authority connected to this project work

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	The scope includes getting the approvals from the statutory authorities, which includes arranging for inspection visits of statutory authority periodically as per BHEL Engineer's instructions, arranging materials for ground inspection, taking rub outs for the pressure parts to be offered for inspection, submitting co-related inspection reports, documents, radiographs etc and following up the matter with them. Contractor shall also make all arrangements for offering the Products / Systems for inspection at location, as applicable, to the concerned authority.
8.3.2	Contractor should be qualified to execute pressure parts & piping work coming under the purview of IBR, for which he should register himself with CIB of state concerned. contractor also should be aware of the latest IBR regulations and Electricity Act, including the amendments thereof.
8.3.3	Contractor shall comply with 'Qualification Tests for welders engaged in welding of Boilers and Steam Pipes under Construction, Erection and Fabrication at Site in India and in repairing Boilers and steam pipes by welding' in line with Chapter XIII of Indian Boiler Regulations-1950, for testing his welders / men / workers, including all associated fees, procedures, required instruments and equipments and their calibration there of. It shall be contractor's responsibility to obtain approval of Statutory Authorities, wherever applicable, for the conducting of any work which comes under the purview of these authorities, at his cost.
8.3.4	The following fees shall be excluded from scope of Contractor: 1. Registration Fee as per Regulation 385 of Chapter IX of Indian Boiler Regulations-1950 2. Fees for inspection of Boiler at the site of Construction as per Regulation 395 A, sl no 4 of Chapter IX of Indian Boiler Regulations-1950 However all other fees like visit fees charged by the Boiler Inspector and other arrangements for his visit or visits till satisfactory completion of work, shall be included in scope of Contractor
8.4	The Quality Management System of BHEL, Power Sector Regions (PSNR/PSER/PSWR/PSSR) have already been certified and accredited under ISO 9002 standards in this regard. The basic philosophy of the Quality Management System is to define the organizational responsibility, work as per

Bharat Heavy Electricals Limited

Power Sector – Eastern Region, Kolkata

VOLUME-ID

TENDER NO. PSER:SCT:NBN-C2027:20

PAGE24OF47

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter – VIII: Inspection and Quality

	documented procedures, verify the output with respect to acceptance norms, identify the non-conforming product/ procedure and take corrective action for removal of non-conformance specifying the steps for avoiding recurrence of such non-conformities, & maintain the relevant quality records. The nonconformities are to be identified through the conduct of periodical audit of implementation of quality systems at various locations/stages of work. Suppliers/vendors of various products/services contributing in the work are also considered as part of the quality management system. .as such the contractor is expected not only to conform to the quality management system of BHEL but also it is desirable that they themselves are accredited under any quality management system standard.
8.5	Field Quality Assurance
8.5.1	Contractor shall carry out all activities conforming to the approved Field Quality Plan (FQP) as revised from time to time. Total quality shall be the watchword of the work and contractor shall strive to achieve the quality standards, procedures laid down by BHEL. He shall follow all the instructions as per BHEL drawings and quality standards. Contractor shall provide the services of quality assurance engineer as per the relevant clauses.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.0	OCCUPATIONAL HEALTH, SAFETY & ENVIRONMENT MANAGEMENT/ QUALITY ASSURANCE PROGRAMME: BHEL, Power Sector Regions (PSNR/ER/WR/SR) are each certified for ISO 9001. Quality of work to customer's satisfaction and fulfillment of system requirements are the essence of ISO 9001 certification. BHEL, PS Regions have HSE certification (ISO 14001 & OHSAS 18001) and therefore Contractor also shall organise/ plan/ perform all their activities to meet with the applicable requirements of these standards.
9.1	HSE (Health, safety & Environment): Contractor will comply with HSE (Health, safety & Environment) requirements of BHEL. HSE requirements in brief, are given below :-
9.1.1	Contractor will nominate one of their qualified and experienced employees as Safety Officer, who will be responsible for all HSE related issues of contractors work area. Safety Officer will have authority to stop any activity, in case he observes that the activity is not being carried out in safe manner. He will conduct surprise inspection as well as periodic inspection/drill (at least once in a month) and submit such reports to BHEL. He will conduct periodic meetings with supervisors of different working groups and explain HSE issues and use of PPEs to them. Reports of such meetings will be submitted to BHEL. Contractor will develop suitable work procedures based upon HSE guidelines and OCPs and implement it. Such work procedures will consist of Area of work, T&P Details, Work Procedure, PPE requirements etc. Please refer Schedule VIII of BOCW Rules for number of safety officers, qualification, duties etc. Contractor should highlight the requirement of safety to staff and labour through daily tool box meeting before start of the days job. Contractor to also submit monthly safety reports as per the format/procedure of BHEL.
9.1.2	The contractor shall arrange induction and regular health check of their employees as per schedule VII of BOCW rules by aregistered medical practitioner. The contractor shall take special care of the employees affected with occupational diseases under rule 230 and schedule II of BOCW Rules. The employees not meeting the fitness requirement should not be engaged for such job
9.1.3	Following personnel protective equipments (PPEs), in adequate numbers, will

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	be made available at site & their regular use by all concerned will be ensured :-
	- HELMET
	- SAFETY GOGGLES & WELDING FACE SHIELDS
	- SAFETY BELTS AND PROTECTIVE NET FOR WORKING AT HEIGHT
	- SAFETY SHOES
	- EAR PLUG
	- ANY OTHER SAFETY EQUIPMENT REQUIRED FOR SAFE COMPLETION OF THE WORK
	Contractor to also submit monthly reports on above as per the format/procedure of BHEL.
9.1.4	Providing appropriate First Aid facilities for prompt treatment of injuries and illness at work place. Arranging training to contractor workmen/ employees for giving first aid.
9.1.5	Arranging ambulance in case of any emergency situation .
9.1.6	Identification of nearest hospital and health check-up of workmen/employees
9.1.7	Providing filtered drinking water at work place in cool container.
9.1.8	Providing Canteen, Rest Room, Washing facilities to the contracted employees as per provisions of Contract Labour Regulation Act 1970 (Chapter V).
9.1.9	Providing appropriate fire fighting equipment at designated work place and nominate a fire officer/warden adequately trained for his job.
9.1.10	Identification of nearest fire station and display contact telephone nos. / person's name around work places for cases of emergencies .
9.1.11	Providing adequate no. of 24 V sources and ensure that no hand lamps are operating at voltage level above 24 Volts.
9.1.12	Fulfilling safety requirements at all power tapping points.
9.1.13	Red & White caution tape of proper width(1.5 to 2 inch) to be used for cordoning unsafe area such as open trench, excavation area etc.
9.1.14	Providing contractors company logo on cloths /uniform/ proper identity cards with photographs, for correct identification of people working at project site .
9.1.15	High/ Low pressure welders to be identified with separate colourclothings. No welders will be deployed without passing appropriate tests and holding valid welding certificates. Approved welding procedure should be displayed at work place.
9.1.16	Displaying safe handling procedures for all chemicals such as lube oil, acid, alkali, sealing compounds etc , at work place .

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.1.17	All scaffolding/ platforms should be made from materials of appropriate quality/grade so that these are safe for use. It should be certified/declared safe for use by an experienced contractor person, before any scaffolding/platform is used. Please refer IS:3696 part 1&2 and 4014 part 1 & 2
9.1.18	All T&Ps/ MMEs should be of reputed brand/appropriate quality & must have valid test/calibration certificates bearing endorsement from competent authority of BHEL.. Contractor to also submit monthly reports of T&Ps deployed and validity test certificates to BHEL safety Officer as per the format/procedure of BHEL.
9.1.19	Ensure that the regulatory requirement of excessive weight limit (to carry/lift/ move weights beyond prescribed limits) for male and female workers are complied with.
9.1.20	Safety slogan, Safety/ Caution boards , wherever required to be displayed in consultation with BHEL.
9.1.21	Take suitable measures for waste management and environment related laws/legislation as a part of normal construction activities. Compliance with the legal requirements on storage/ disposal of paint drums (including the empty ones), Lubricant containers, Chemical Containers, and transportation and storage of hazardous chemicals will be strictly maintained. Ensure proper cleanliness of work place, housekeeping and waste management (including proper waste disposal) on daily basis.
9.1.22	It is imperative on the part of the contractor to join and effectively contribute in joint measures such as tree plantation, environment protection, contributing towards social upliftment, conversion of packing woods to school furniture, keeping good relation with local populace etc.
9.1.23	The contractor shall carry out periodic air and water quality check and illumination level checking in his area of work place and take suitable control measure.
9.1.24	The Contractor is required to provide proper safety net systems (IS-11057) where ever the hazard of fall from height is present as per instruction of BHEL Engineer. The safety nets shall be fire resistant, duly tested and shall be of ISI Mark and the nets shall be located as per site requirements to arrest or to reduce the consequences of a possible fall of persons working at different heights.
9.1.25	All applicable OCPs (Operational control procedures) will be followed by contractor as per BHEL instructions. This will be done as part of normal scope of work. List of such OCPs is given below . In case any other OCP is found to

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	be applicable during the execution of work at site, then contractor will follow this as well, within quoted rate. These OCPs (applicable ones) will be made available to contractor during work execution at site. However for reference purpose, these are kept with Safety Officer of BHEL at the Power Sector Regional HQ, or available in downloadable format in the website, which may be refereed by contractor, if they so desire.
■	OCP for safe handling of chemicals
■	OCP for Electrical safety
■	OCP for energy conservation
■	OCP for safe welding and gas cutting operation
■	OCP for fire safety
■	OCP for safety in use of hand tools
■	OCP for first aid
■	OCP for food safety at canteen
■	OCP for safety in use of cranes
■	OCP for storage and handing of gas cylinders
■	OCP for manual arc welding
■	OCP for safe use of helmets
■	OCP for good house keeping
■	OCP for working at height
■	OCP for safe excavation
■	OCP for safe filling of Hydrogen in cylinder
■	OCP for illumination
■	OCP for handling and erection of heavy metals
■	OCP for safe acid cleaning
■	OCP for safe alkali boil out
■	OCP for safe oil flushing
■	OCP for steam blowing
■	OCP for safe working in confined area
■	OCP for safe operation of passenger lift, material hoists & cages
■	OCP for Vehicle maintenance
■	OCP for safe radiography
■	OCP for waste disposal
■	OCP for working at night
■	OCP for blasting
■	OCP for DG Set
■	OCP for handling & storage of mineral wool

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	■ OCP for drilling, reaming and grinding(machining) etc.
	■ OCP for hydraulic test
	■ OCP for spray insulation
	■ OCP for trial run of rotary equipment
	■ OCP for stress relieving
	■ OCP for material preservation
	■ OCP for cable laying/tray work
	■ OCP for electrical maintenance
	■ OCP for transformer charging
	■ OCP for safe handling of battery system
	■ OCP for computer operation
	■ OCP for storage in open yard
	■ OCP for sanitary maintenance
	■ OCP for batching
	■ OCP for piling rig operation
	■ OCP for gas distribution test
	■ OCP for cleaning of hotwell / deaerator
	■ OCP for electro-resistance heating
	■ OCP for compressor operation
	■ OCP for O&M of control of AC plant & system
	■ OCP for air compressor
	■ OCP for passivation
	■ OCP for Safe EDTA Cleaning
	■ OCP for Safe Chemical cleaning of Pre boiler system
	■ OCP for Safe Boiler Light up
	■ OCP for Safe Rolling and Synchronisation
	■ OCP for Safe Loading of Unit
9.2	SAFETY AND CLEANLINESS : The contractor shall take all necessary safety precautions and arrange for appropriate appliances as per discretion of BHEL or its authorised officials (Site Construction Manager) to prevent loss of human lives, injuries, to personnel engaged and damage to property. Before commencing the work, the contractor shall submit a "Safety Plan" to the above authorised BHEL official and obtain approval on the same. The safety plan shall indicate in detail the measures that would be taken by the contractor to ensure safety of men, equipment, materials and environment during execution of the work. This will also include an organization structure, role and responsibilities of the concerned key

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	personnel, the safety practices that will be followed, PPEs deployed, plan for handling critical activities and emergencies.
9.3	If the contractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instructions issued by the authorised BHEL official, BHEL shall have the right to take corrective steps at the risk and cost of the contractor.
9.4	During the course of construction, alternation or repairs, scrap with protruding nail, sharp edge etc and all other debris shall be kept clean from working areas, passage, ways and stairs in and around site.
9.5	Combustible scrap and debris shall be removed at regular intervals during the course of execution. Safe means shall be provided to facilitate such removal. The combustible scrap should be stored in safe place away from the plant materials to avoid fire accidents. The area shall be chosen in consultation with the Engineer and to be cordoned off.
9.6	Rigging equipment for materials handling shall be inspected prior to use in each shift and as necessary during its use to ensure that it is safe. Defective rigging equipment will be removed from service.
9.7	Rigging equipment shall not be loaded in excess of its recommended safe working load. Rigging equipment, when not in use, shall be removed from the original work area so as not to present a hazard to employees.
9.8	Contractor shall notify the engineer, of his intention to bring on to site any equipment or any container, with liquid or gaseous fuel or other substance which may create a hazard. The Engineer shall have the right to prescribe the condition under which such equipment or container may be handled and used during the performance of the works and the contractor shall strictly adhere to such instructions. The Engineer shall have the right to inspect any construction tool and to forbid its use, if in his opinion it is unsafe. No claim due to such prohibition will be entertained.
9.9	Where it is necessary to provide and/or store petroleum products or petroleum mixture & explosives, the contractor shall be responsible for carrying out such provision / storage in accordance with the rules & regulations laid down in the relevant petroleum act, explosive act and petroleum and carbide of calcium manual, published by the chief inspector of explosives of India. All such storage shall have prior approval if necessary from the chief inspector of explosives or any other statutory authority. The contractor shall be responsible for obtaining

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	the same.
9.10	Cylinders shall be moved by tilting and rolling them on their bottom edges. They shall not be intentionally dragged, struck or permitted to strike each other violently.
9.11	When cylinders are transported by powered vehicle they shall be secured in a vertical position.
9.12	All workmen of the contractor working on construction area shall wear safety shoes, hand gloves, safety helmets and safety belt as applicable. The contractor shall provide to its workforce and ensure the use of following personnel protective equipment as found necessary and as directed by BHEL.
9.12.1	Safety Helmets conforming to IS-2925 : 1984
9.12.2	Safety Belts conforming to IS-3521:1983
9.12.3	Safety Shoes conforming to IS-1989 : 1978
9.12.4	Eye and face protection devices conforming to IS – 1179:1967, IS 5983:1980, IS 8521 Part 1:1977, IS 8521 Part 2: 1994.
9.12.5	Hand and body protection devices conforming to IS 4770:1991 and IS- 6994 : Part 1: 1973, IS – 8619 : 1977
9.12.6	Ear protection IS-9167:1979
9.12.7	Respiratory Protective Devices as per IS-9473:2002, i4746:1999 and 14166:1994
9.13	The contractor shall insure his workmen against all accidents and the policy shall be presented to BHEL Engineer on demand. Other wise, BHEL will arrange the same and the expenditure towards this will be debited to the contractor. In case of a fatal or disabling injury accident to any person at construction site due to lapses by the contractor, the victim and/or his/her dependants shall be compensated by the contractor as per statutory requirements. However, if considered necessary BHEL shall have the right to impose appropriate financial penalty on contractor and recover the same from payments due to the contractor for suitably compensating the victim and/or his/her dependence before imposing any such penalty. Appropriate enquiry shall be held by BHEL giving opportunity to the contractor for presenting his case. Above safety conditions are not exhaustive but gives an idea for the contractor and contractor shall adhere to all safety precaution given by the

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	Engineer at site.
9.14	The contractor shall arrange at his cost adequate lighting facilities e.g. flood lighting, hand lamps, area lighting etc. at various levels for safe and proper working operations during night hours at the work spot as well as at the pre-assembly area.
9.15	The contractor shall be responsible for provision of all the safety notices and safety equipment as enjoined on him by the application of relevant statutory regulation / provisions and/or as called upon by BHEL from time to time. He shall be held responsible for any violation of statutory regulations (local, state or central) and BHEL instruction that may endanger safety of men, equipment and material.
9.16	The contractor shall provide temporary fencing wherever required as a safety measure against accident and damage to properties. Suitable caution notices shall be displayed where access to any part is found to be unsafe and hazardous.
9.17	Contractor shall ensure safety of all the workmen, material and equipment either belonging to him or to others working at site. He shall observe safety rules and codes applied by BHEL without exception.
9.18	It will be the responsibility of the contractor to ensure safe lifting of the equipment, taking due precaution to avoid any accident and damage to other equipment and personnel. All requisite tests and inspection of handling equipment, tools & tackle shall be periodically done by the contractor by engaging only the COMPETENT PERSONS as per law. Defective equipment or uncertified shall be removed from service. Any equipment shall not be loaded in excess of its recommended safe working load.
9.19	The contractor shall provide necessary first aid facilities as per schedule III. In addition, ambulance facilities, OHC and CMO as per schedule IV, V, X and XI of BOCW Rules as applicable for all his employees, representatives and workmen at site and BHEL shall have no obligation in this regard. The first aid boxes should be placed at various elevations so as to make them available within the reach and at the quickest possible time. The contractor should conduct periodical first –aid classes to keep his supervisor and Engineers properly trained for attending to any emergency.
9.20	Training

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.20.1	The contractor shall arrange induction safety training for all employees before assigning work. In addition, awareness programme, mock drill at regular intervals and daily tool box meetings shall be arranged. Monthly report of the above to be given to BHEL safety Officer as per prescribed BHEL formats
9.20.2	All the contractor's supervisory personnel and sufficient number of workers shall be trained for fire protection systems. Enough number of such trained personnel must be available during the tenure of contract. Contractor should nominate his supervisor to coordinate and implement the safety measures.
9.21	Contractor shall provide enough fire protecting equipment of the types and numbers at his office, stores, temporary structure in labour colony etc. Such fire protection equipment shall be easy and kept open at all times. The fire extinguishers shall be properly refilled and kept ready which should be certified at periodic intervals. The date of changing should be marked on the Cylinders. All other fire safety measures as laid down in the "codes for fire safety at construction site" issued by safety coordinator of BHEL shall be followed. Non-compliance of the above requirement under fire protection shall in no way relieve the contractor of any of his responsibility and liabilities to fire accident occurring either to his materials or equipment or those of others. Emergency contacts nos must be displayed at prominent locations
9.22	The contractor shall at his cost, remove from vicinity of work at least once each day all combustible waste, scrap, parting materials, rubbish, unused or other materials and deposit them in places specified by BHEL to keep the work site clear and tidy. Use of undercoated canvas paper, corrugated paper, fabricated carton, plastic or other flammable materials shall be restricted to the minimum and promptly removed.
9.23	The contractor shall not use any hand lamp energized by Electric power with supply voltage of more than 24 volts in confined spaces like inside water boxes, turbine casings, condensers etc.
9.24	All portable electric tools used by the contractor shall have safe plugging system to source of power and be appropriately earthed. Only electricians licensed by appropriate statutory authority shall be employed by the contractor to carry out all types of electrical works. Details of earth resource and their test date to be given to BHEL safety officer as per the prescribed formats of BHEL
9.25	In case of any delay in completion of a job due to mishaps attributable to lapses by the contractor, BHEL shall have the right to recover cost of such delay from

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	the payments due to the contractor, after notifying the contractor suitably.
9.26	Valve protection caps shall be kept in place and secured.
9.27	The contractor shall be responsible for the safe storage and handling of his radio-active sources as per BARC rules and regulations.
9.28	Tarpaulin being inflammable should not be used (instead, only non infusible covering materials shall be used) as protective cover while preheating, welding, stress relieving etc. at site.
9.29	If the contractor fails to improve the standards of safety in its operation to the satisfaction of BHEL after being given reasonable opportunity to do so and/or if the contractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instruction regarding safety issued by BHEL, BHEL shall have the right to take corrective steps at the risk and cost of the contractor after giving a notice of not less than 7 days indicating the steps that would be taken by BHEL.
9.30	If the contractor succeeds in carrying out its job in time with out any fatal or disabling injury accident and without any damage to property BHEL may, at its sole discretion, favorably consider to reward the contractor suitably for the performance.
9.31	The contractor shall carefully follow the safety requirement of BHEL/ the purchaser with the regard to voltages used in critical areas.
9.32	The contractor shall use only properly insulated and armored cables which conform to the requirement of Indian Electricity Act and Rules for all wiring, electrical applications at site. BHEL reserves the right to replace any unsafe electrical installations, wiring, cabling etc. at the cost of the contractor. All electrical appliances used in the work shall be in good working condition and shall be properly earthed. No maintenance work shall be carried out on live equipment. The contractor shall maintain adequate number of qualified electricians to maintain his temporary electrical installations. Area wise Electrical safety inspection is to be carried out on monthly basis as per "Electrical Safety Inspection checklist" and the report is to be submitted to BHEL safety officer
9.33	The contractor shall arrange adequate number of persons specifically for clearing any debris and for house keeping of the erection area including restacking of components in the erection areas. Housekeeping to be carried out

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	as per BHEL's checklist and report is to be submitted to BHEL safety officer
9.34	In case of any damage to property due to lapses by the contractor, BHEL shall have the right to recover the cost of such damages from the contractor after holding an appropriate enquiry.
9.35	The contractor shall submit report of all accidents, fires and property damage etc to the Engineer immediately after such occurrence, but in any case not later than 24 hours of the occurrence. Such reports shall be furnished in the manner prescribed by BHEL. In addition periodic reports on safety shall also be submitted by the contractor to BHEL from time to time as prescribed by the Engineer. Compiled monthly reports of all kinds of accidents, fires and property damage to be submitted to BHEL safety officer as per prescribed formats
9.36	Before commencing the work, the contractor shall appoint/nominate a responsible person to supervise implementation of all safety measures and liaison with his counterpart of BHEL.
9.37	Suitable scaffolds shall be provided for workman for all works that cannot safely be done from the ground, or from solid construction except in the case of short duration of work which can be done safely from ladders. When a ladder is used, it shall be of rigid construction made of steel. The steps shall have a minimum width of 45 cm and a maximum rise of 30 cm. Suitable handholds of good quality wood or steel shall be provided and the ladder shall be given an inclination not steeper than $\frac{1}{4}$ horizontal and 1 vertical.
9.38	Scaffolding or staging more than 3.6 m above the ground floor, swung or suspended from an overhead support or erected with stationery support shall have a guard rail properly bolted, braced or otherwise secured, at least 90 cm above the floor or platform of such scaffolding or staging and extending along the entire length of the out side and ends thereof with only such openings as may be necessary for the delivery of materials. Such scaffolding or staging shall be so fastened as to prevent it from savor, from swaying, from the building or structure.
9.39	Working platforms, gangways and stairways shall be so constructed that they do not sag unduly or unequally and if the height of the platform gangways provided is more than 3.6 m above ground level or floor level, they shall be closely boarded and shall have adequate width which shall not be less than 750 mm and be suitably fenced as described above.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

9.40	Every opening in the floor or a building or in a working platform shall be provided with suitable means to prevent the fall of persons or materials by providing suitable fencing or railing whose minimum height shall be 90 cm.
9.41	Wherever there are open excavation in ground, they shall be fenced off by suitable railing and danger signals installed at night so as to prevent persons slipping into the excavations.
9.42	Safe means of access shall be provided to all working places. Every ladder shall be securely fixed. No portable single ladder shall be over 9 m in the length while the width between side rails in rung ladder shall in no case be less than app. 29.2 cm for ladder upto and including 3 m in length. For longer ladders this width shall be increased at least ¼” for each additional foot of length.
9.43	A sketch of the ladders and scaffolds proposed to be used shall be prepared and approval of the Engineer obtained prior to Construction.
9.44	All personnel of the Contactor working within the plant site shall be provided with safety helmets. All welders shall wear welding goggles while doing welding work and all metal worker shall be provided with safety gloves. Persons employed on metal cutting and grinding shall wear safety glasses.
9.45	Adequate precautions shall be taken to prevent danger for electrical equipment. No materials on any of the sites of work shall be so stacked or placed as to cause danger or inconvenience to any person or the public.
9.46	All trenches, four feet or more in depth, shall at all times be supplied with at least one ladder for each 30 m in length or fraction thereof. The ladder shall be extended from bottom of the trench to at least 90 cm above the surface of the ground. Sides of the trenches which are 1.50 m or more in depth shall be stepped back to give suitable slope or securely held by timer bracing, so as to avoid the danger of sides collapsing. The excavated materials shall not be placed within 1.5 m of the edges of the trench or half of the depth of the trench whichever is more. Cutting shall be done from top to bottom. Under no circumstances undermining or undercutting shall be done.
9.47.1	The contractor shall take permission of BHEL prior to risky jobs such as working at height, hot work, liftig activities, etc through permits. No job should be started without permits.
9.47.2	The Contactor shall take all measures at the sites of the work to protect all persons from accidents and shall be bound to bear the expenses of defense of

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	every suit, action or other proceeding at law that may be brought by any persons for injury sustained or death owing to neglect of the above precautions and to pay any such persons such compensation or which may with the consent of the Contractor be paid to compromise any claim by any such person should such claim proceeding be filed against BHEL, the Contractor hereby agrees to indemnify BHEL against the same.
9.48	Before any demolition work is commenced and also during the process of the work the following shall be ensured:
9.48.1	All roads and open areas adjacent to the work site shall either be closed or suitably protected.
9.48.2	No electric cable or apparatus which is liable to be a source of danger nor a cable or an apparatus used by the operator shall remain electrically charged.
9.48.3	All practical steps shall be taken to prevent danger to persons employed from the risks of fire or explosion or flooding. No floor, roof or other part of the building shall be so overloaded with debris or materials as to render them unsafe.
9.49	All necessary personnel safety equipment as considered adequate by the Engineer should be kept available for the use of the persons employed in the Site and maintained in a condition suitable for immediate use and the Contractor should take adequate steps to ensure proper use of equipment by those concerned.
9.49.1	Workers employed on mixing asphalted materials, cement and lime mortars shall be provided with protective foot wear and protective goggles.
9.49.2	Those engaged in white washing and mixing or stacking of cement bags or any materials which is injurious to the eyes shall be provided with protective goggles.
9.49.3	Those engaged in welding works shall be provided with welder's protective eyesight lids.
9.49.4	Stone breakers shall be provided with protective goggles and protective clothing and seated sufficient to safe intervals.
9.49.5	Where workers are employed in sewers and manholes, which are in use, the Contractor shall ensure that the manhole covers are opened and ventilated at least for an hour before the workers are allowed to get into manhole, and the manholes so opened shall be cordoned off with suitable railing and provided

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	with warning signals or boards to prevent accident to the public.
9.49.6	The Contractor shall not employ men below the age of 18 years and women on the work of painting with products containing lead in any form. Wherever men above the age of 18 are employed on the work of lead painting, the following precautions should be taken.
9.49.6.1	No paint containing lead or lead products shall be used except in the form of paste or ready made paint.
9.49.6.2	Suitably face masks should be supplied for use by the workers where paints are applied in the form of spray or a surface having lead paint dry rubbed and scrapped.
9.49.6.3	Overalls shall be supplied by the Contractor to the workmen and adequate facilities shall be provided to enable the working painters to wash during the cessation of work.
9.50	When the work is being done near any place where there is risk of drowning all necessary equipment should be provided and kept ready for use and all necessary steps taken for prompt rescue of any person in danger and adequate provision should be made for prompt first aid treatment of all injuries likely to be sustained during the course of the work.
9.51	Motors, gearing, transmission, electric wiring and other dangerous parts of hoisting appliances should be provided with efficient safe guards. Hoisting appliance should be provided with such means as will reduce to the minimum the risk of any part of a suspended load becoming accidentally displaced. When workers employed on electrical installations which are already energized, insulting mats, wearing apparel, such as gloves, sleeves and boots as may be necessary should be provided. The worker should not wear any rings, watches and carry keys or other materials which are good conductor of electricity.
9.52	All scaffolds, ladders and other safety devices mentioned or described herein shall be maintained in safe condition and no scaffold, ladder or equipment shall be altered or removed while it is in use. Adequate washing facilities should be provided at or near the places of work.
9.53	The contractor shall maintain and ensure necessary safety measures as required for inspection and tests HV test, Pneumatic test, Hydraulic test, Spring test, Bend test etc as applicable, to enable inspection Agency for performing Inspection. If any test equipment is found not complying with proper safety

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	requirements then the Inspection Agency may withhold inspection, till such time the desired safety requirements are met.
9.54	The Contractor shall notify BHEL of his intention to bring to site any equipment or material which may create hazard. BHEL shall have the right to prescribe the conditions under which such equipment or materials may be handled and the contractor shall adhere to such instructions. BHEL may prohibit the use of any construction machinery, which according to him is unsafe. No claim for compensation due to such prohibition will be entertained by BHEL.
9.55	All safety precautions shall be taken for welding and cutting operations as per IS-818. All safety precautions shall be taken for foundation and other excavation marks as per IS-3764.
9.56	.All gas cylinders shall be stored in upright position. Suitable trolley shall be used. There shall be flash-back arrestors conforming to IS-11006 at both cylinder and burner ends. Damaged tube and regulators must be immediately replaced. No of cylinders shall not exceed the specified quantity as per OCP
9.57	These safety provisions should be brought to the notice of all concerned by display on a notice board at a prominent, place at work spot. The persons responsible for compliance of the safety code shall be named therein by the Contractor
9.58	To ensure effective enforcement of the rules and regulations relating to safety precautions the arrangement made by the contract shall be open to inspection by the Engineer of the Engineer's Representative.
9.59	Keeping the work area clean/ free from debris, removed scaffoldings, scraps, insulation/sheeting wastage /cut pieces, temporary structures, packing woods etc. will be in the scope of the contractor. Such cleanings has to be done by contractor within quoted rate, on daily basis by an identified group. If such activity is not carried out by contractor / BHEL is not satisfied, then BHEL may get it done by other agency and actual cost alongwith BHEL overheads will be deducted from contractor's bill. Such decisions of BHEL shall be binding on the contractor.
9.60	Notwithstanding the above clauses there is nothing to exit the Contractor from the operations of any other Act or Rule in force in area of work in this respect. Provided always that all safety measures apart from those specifically provided in this agreement which are brought to the notice of the Contractor from time to time by the Engineer shall be complied by the Contractor. Provided further that

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	all consequences, damages, or losses arising by reason of any safety code shall be met with by the Contractor.																																																																
9.61	<u>NON COMPLIANCE:-</u> NONCONFORMITY OF SAFETY RULES AND SAFETY APPLIANCES WILL BE VIEWED SERIOUSLY AND BHEL HAS RIGHT TO IMPOSE FINES ON THE CONTRACTOR AS UNDER <u>for every instance of violation noticed:</u> <table border="1"> <thead> <tr> <th>SN</th><th>Violation of Safety Norms</th><th>Fine (in Rs)</th></tr> </thead> <tbody> <tr><td>01</td><td>Not Wearing Safety Helmet</td><td>50/- *</td></tr> <tr><td>02.</td><td>Not wearing Safety Belt or not anchoring life line</td><td>100/-*</td></tr> <tr><td>03</td><td>Not wearing safety shoe</td><td>100/-*</td></tr> <tr><td>04</td><td>Not keeping gas cylinders vertically</td><td>100/-</td></tr> <tr><td>05</td><td>Not using flash back arrestors</td><td>50/-</td></tr> <tr><td>06</td><td>Not wearing gloves</td><td>50/- *</td></tr> <tr><td>07.</td><td>Grinding Without Goggles</td><td>50/- *</td></tr> <tr><td>08.</td><td>Not using 24 V Supply For Internal Work</td><td>500/-</td></tr> <tr><td>09.</td><td>Electrical Plugs Not used for hand Machine</td><td>100/-</td></tr> <tr><td>10.</td><td>Not Slings property</td><td>200/-</td></tr> <tr><td>11.</td><td>Using Damaged Sling</td><td>200/-</td></tr> <tr><td>12.</td><td>Lifting Cylinders Without Cage</td><td>500/-</td></tr> <tr><td>13.</td><td>Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.</td><td>200/-</td></tr> <tr><td>14.</td><td>Not Removing Small Scrap From Platforms</td><td>200/-</td></tr> <tr><td>15.</td><td>Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting</td><td>200/-</td></tr> <tr><td>16.</td><td>Not Maintaining Electric Winches Which are Operated Dangerously</td><td>500/-</td></tr> <tr><td>17.</td><td>Improper Earthing Of Electrical T&P</td><td>500/-</td></tr> <tr><td>18</td><td>No or improper barricading</td><td>500/-</td></tr> <tr><td>19.</td><td>Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)</td><td>1000/-</td></tr> <tr><td>20.</td><td>Accident Resulting in Partial Loss in Earning Capacity</td><td>25,000/- per victim</td></tr> </tbody> </table>		SN	Violation of Safety Norms	Fine (in Rs)	01	Not Wearing Safety Helmet	50/- *	02.	Not wearing Safety Belt or not anchoring life line	100/-*	03	Not wearing safety shoe	100/-*	04	Not keeping gas cylinders vertically	100/-	05	Not using flash back arrestors	50/-	06	Not wearing gloves	50/- *	07.	Grinding Without Goggles	50/- *	08.	Not using 24 V Supply For Internal Work	500/-	09.	Electrical Plugs Not used for hand Machine	100/-	10.	Not Slings property	200/-	11.	Using Damaged Sling	200/-	12.	Lifting Cylinders Without Cage	500/-	13.	Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.	200/-	14.	Not Removing Small Scrap From Platforms	200/-	15.	Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting	200/-	16.	Not Maintaining Electric Winches Which are Operated Dangerously	500/-	17.	Improper Earthing Of Electrical T&P	500/-	18	No or improper barricading	500/-	19.	Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)	1000/-	20.	Accident Resulting in Partial Loss in Earning Capacity	25,000/- per victim
SN	Violation of Safety Norms	Fine (in Rs)																																																															
01	Not Wearing Safety Helmet	50/- *																																																															
02.	Not wearing Safety Belt or not anchoring life line	100/-*																																																															
03	Not wearing safety shoe	100/-*																																																															
04	Not keeping gas cylinders vertically	100/-																																																															
05	Not using flash back arrestors	50/-																																																															
06	Not wearing gloves	50/- *																																																															
07.	Grinding Without Goggles	50/- *																																																															
08.	Not using 24 V Supply For Internal Work	500/-																																																															
09.	Electrical Plugs Not used for hand Machine	100/-																																																															
10.	Not Slings property	200/-																																																															
11.	Using Damaged Sling	200/-																																																															
12.	Lifting Cylinders Without Cage	500/-																																																															
13.	Not Using Proper Welding Cable With Lot of Joints And Not Insulated Property.	200/-																																																															
14.	Not Removing Small Scrap From Platforms	200/-																																																															
15.	Gas Cutting Without Taking Proper Precaution or Not Using Sheet Below Gas Cutting	200/-																																																															
16.	Not Maintaining Electric Winches Which are Operated Dangerously	500/-																																																															
17.	Improper Earthing Of Electrical T&P	500/-																																																															
18	No or improper barricading	500/-																																																															
19.	Activity carried out without Safety work permit (Height work, Lifting activity, Hot work-each person/case)	1000/-																																																															
20.	Accident Resulting in Partial Loss in Earning Capacity	25,000/- per victim																																																															

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter - IX: HSE & OHSAS

	21.	Fatal Accident/Accidents Resulting in total loss in Earning Capacity	1,00,000/- per victim #
	Legend:-*: per head, #: or as deducted by Customer whichever is higher Any other non-conformity noticed not listed above will also be fined as deemed fit by BHEL. The decision of BHEL engineer is final on the above. The amount will be deducted from running bills of the contractor. The amount collected above will be utilized for giving award to the employees who could avoid accident by following safety rules. Also the amount will be spent for purchasing the safety appliances and supporting the safety activity at site.		
9.61	<u>CITATION</u>:-If safety record of the contractor in execution of the awarded job is to the satisfaction of safety department of BHEL, issue of an appropriate certificate to recognize the safety performance of the contractor may be considered by BHEL after completion of the job		
9.62	<u>MEMORANDUM OF UNDERSTANDING</u> After Award Of Work, Contractors Are Required To Enter Into A Memorandum Of Understanding As Given Below: <u>Memorandum of Understanding</u> ➤ BHEL, Power Sector _____ Region is committed to Health, Safety and Environment Policy (EHS Policy). ➤ M/s _____ do hereby also commit to the same EHS Policy while executing the Contract Number _____ ➤ M/s _____ shall ensure that safe work practices not limited to the above are followed by all construction workers and supervisors. Spirit and content therein shall be reached to all workers and supervisors for compliance. ➤ BHEL will be carrying out EHS audits twice a year and M/s _____ shall ensure to close any non-conformity observed/reported within fifteen days. Signed by authorized representative of M/s -----		

SPECIAL CONDITIONS OF CONTRACT (SCC)
Chapter - IX: HSE & OHSAS

	Name : Place & Date:

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-X: RA Bill Payments

10.0	RA Bill Payments
10.1	The contractor shall submit his monthly RA bills with all the details required by BHEL on specified date every month covering progress of work in all respects and areas for the previous calendar month.
10.2	Mode of payment and measurement of work completed shall be as per relevant clauses of General Conditions of Contract
10.3	Release of payment in each running bill including PVC Bills where ever applicable will be restricted to 95% of the value of work admitted as per stages of progressive pro rata payments.
10.4	The 5% thus remaining shall be treated as 'Retention Amount' and shall be released as per terms specified in the General Conditions of Contract.
10.5	The payment for running bills will normally be released within 30 days of submission of running bill complete in all respects with all documents. It is the responsibility of the contractor to make his own arrangements for making timely payments towards labour wages, statutory payments, outstanding dues etc and other dues in the meanwhile. In case of Civil works, 60% of RA Bills complete and correct in all respects and certified by BHEL Engineer, shall be paid within 15 days of receipt. Balance payment shall be within 30 days.
10.6	BHEL shall release payment through Electronic Fund Transfer (EFT)/RTGS. In order to implement this system, Contractor to furnish details pertaining to his Bank Accounts where proceeds will be transferred through BHEL's banker, as per prescribed formats: Note: BHEL may also choose to release payment by other alternative modes as applicable
10.7	Paying Authority shall be the Construction Manager of the Site. Any change in the paying Authority shall be intimated to the Contactor accordingly.

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-XI : Performance Monitoring

11.0	Performance Monitoring
11.1	Performance of the contractor is monitored through various reports/reviews and shall be jointly evaluated every month for unit wise identified packages as per prescribed formats. Based on the net weighted scores obtained, Contractors shall be rated 'Good' or 'Satisfactory' or 'Unsatisfactory'
11.2	In case of any dispute on performance rating and the contractor refuses to sign on the performance rating given by BHEL package Incharge, the same shall be reviewed by BHEL site Incharge/Construction Manager and his decision shall be final.
11.3	Release of RA Bills will be contingent upon joint evaluation of performance
11.4	Performance of the contractor will be taken into consideration for assessing the capacity of the bidder to execute future jobs under tender, as detailed in the Notice Inviting Tender. Risk of non evaluation or non availability of the Monthly performance evaluation reports is to be borne by the Bidder.
11.5	In case of 'Unsatisfactory performance' for a continuous period of three or more months for a package or packages, BHEL has the right to get the balance works executed at the risk and cost of the contractor.
11.6	In case of 'Unsatisfactory performance' in a financial year, BHEL reserves the right to put on hold such Contractors for a period of six months for similar package or similar packages

SPECIAL CONDITIONS OF CONTRACT (SCC)


Chapter-XII: Suspension of Business Dealings

12.0	Suspension of Business dealings
12.1	BHEL reserves the right to take action against contractors who fail to perform or indulge in malpractices, by suspending business dealings with them.
12.2	Suspension could be in the form of 'Hold', 'De-listing' or 'Banning' a contractor.
12.3	A bidder may be put on HOLD for a period of 6 months, for future tenders for specific works on the basis of one or more of the following reasons: a) Bidder does not honour his own offer or any of its conditions within the validity period. b) Bidder fails to respond against three consecutive enquires of BHEL. c) After placement of order, Bidder fails to execute a contract. d) Bidder fails to settle sundry debt account, for which he is legitimately liable, within one year of its occurrence. e) Bidder's performance rating falls below 60% in specific category (more fully described in chapter 'Performance Monitoring') f) Bidder works are under strike/ lockout for a long period.
12.4	A Bidder may be de-listed from the list of registered Bidders of the region for a period of 1 year on the basis of one or more of the following reasons:- a) Bidder tampers with tendering procedure affecting ordering process or commits any misconduct which is contrary to business ethics. b) Bidder has substituted, damaged, failed to return, short returned or unauthorizedly disposed off materials/ documents/ drawings/ tools etc of BHEL. c) Bidder no longer has the technical staff, equipment, financial resources etc. required to execute the orders/ contracts.
12.5	A Bidder can be banned from doing any business with all Units of BHEL for a period of 3 years on the basis of one or more of the following reasons: a) Bidder is found to be responsible for submitting fake/ false/ forged documents, certificates, or information prejudicial to BHEL's interest. b) In spite of warnings, the Bidder persistently violates or circumvents the provisions of labour laws/ regulations/ rules and other statutory requirements. c) Bidder is found to be involved in cartel formation

SPECIAL CONDITIONS OF CONTRACT (SCC)

Chapter-XII: Suspension of Business Dealings

	d) The Bidder has indulged in malpractices or misconduct such as bribery, corruption and fraud, pilferage etc which are contrary to business ethics. e) The Bidder is found guilty by any court of law for criminal activity/ offences involving moral turpitude in relation to business dealings. f) The Bidder is declared bankrupt, insolvent, has wound up or been dissolved; i.e ceases to exist for all practical purposes. g) Bidder is found to have obtained Official Company information/ documentation by questionable means. h) Communication is received from the administrative Ministry of BHEL to ban the Bidder from business dealings.
12.6	Contracts already entered with a contractor before the date of issue of order of 'HOLD' or 'DE-LISTING' shall not be affected.
12.7	All existing contracts with a 'BANNED' contractor shall normally be short closed
12.8	Once the order for suspension is passed, existing offers/new offers of the contractor shall not be entertained
12.9	The above guidelines are not exhaustive but enunciate broad principles governing action against contractors

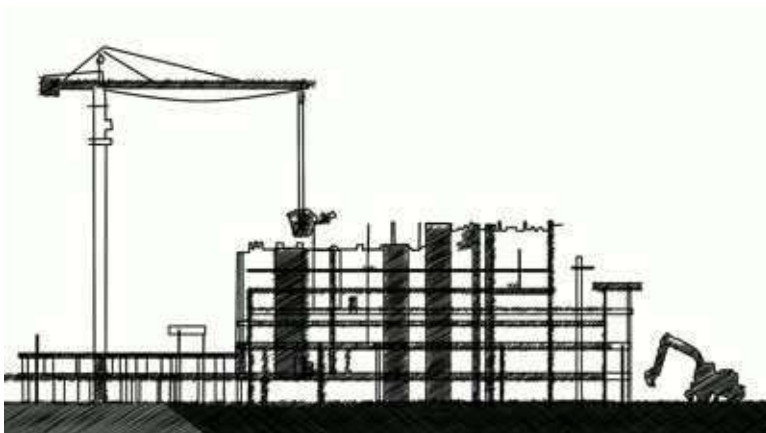

HEALTH, SAFETY and ENVIRONMENT PLAN

For

SITE OPERATIONS

By

SUB-CONTRACTORS

POWER SECTOR- EASTERN REGION

 PS-ER	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER
		Rev.: 00
		Date: 25.04.19
		Page 2 of 162

DOCUMENT ISSUE SHEET

	PREPARED BY	APPROVED BY
NAME	Saswajeet Rout	
DESIGNATION		
SIGNATURE		
ISSUED BY:		
ISSUED TO:		
COPY NO:		
DATE OF ISSUE:		

THIS PLAN SUPERSEDES THE STANDARD HSE PLAN

 PS-ER	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER
		Rev.: 00
		Date: 25.04.19
		Page 3 of 162

HSE PLAN FOR SITE OPERATIONS BY BHEL'S SUBCONTRACTORS AT A GLANCE

BEFORE START	SIGNING OF MOU	
	Agree to comply to HSE requirement- Statutory and BHEL's	Agree to accept BHEL's decision on release of 1.5% (as specified in the contract) of Gross bill Amount or part thereof or otherwise (non-release), based on our HSE performance as evaluated by BHEL during the execution period
PLAN	HSE ORGANISATION	
	Manpower 1 (one) safety officer for every 300 workers or part thereof 1(one) safety-supervisor for every 150 workers 1(one) safety-steward/ supervisor for every 50 workers As per Cl. 7.1	HSE Roles and responsibilities - All employees as per 7.2.1 - Site In-charge & Package In-charges- As per clause 7.2.2 - Safety officer- As per clause 7.2.3
	HSE Planning for Man, Machinery / Equipment/ Tools & Tackles	
PROVIDE	HSE INFRASTRUCTURE	
	- PPEs - Drinking Water - Washing Facilities - Latrines and Urinals - Provision of shelter for rest - Medical facilities	- Canteen facilities - Labor Colony - Emergency Vehicle - Pest Control - Scrapyard - Illumination - Crèches (if required)
TRAIN	HSE TRAINING , AWARENESS & PROMOTION	
	Training - Induction training - Height work and other critical areas - Tool Box talk & Pep Talk - Job Specific Training	Awareness & Promotion - Posters & Signage - Emergency Contact/Information Display - Banner - Competition & Awards
COMMUNICATE	HSE COMMUNICATION	
	Incident Reporting - Accident- Fatal, Major & Minor - Property damage - Near Miss Safety Performance Reporting	Event Reporting - Celebrations - Training - Medical camp - Motivational Activities



PS-ER

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 4 of 162

EXECUTE SAFELY

SAFETY DURING WORK EXECUTION

PERMIT TO WORK

Height work (above 2 meters), Hot Work, Heavy Lifting, Confined Space, Radiography, Excavation (More than 1.22 meters), Lockout / Tag out

OPERATIONAL CONTROL

• Welding, Gas Cutting Grinding • Rigging, Signaling • Cylinder- Storage & Movement • Demolition work • T&Ps • Chemical Handling • Electrical works • Painting	• Fire • Scaffolding • Height work • Working Platform • Excavation / Civil Work • Ladder • Lifting • Hoisting appliance • Hard Barricading

HOUSE KEEPING

WASTE MANGEMENT

TRAFFIC MANAGEMENT

ENVIRONMENTAL CONTROL

EMERGENCY PREPAREDNESS AND RESPONSE PLANNING

HSE AUDITS & INSPECTION

• Daily Checks • Inspection of Height work • Inspection of PPEs • Inspection of T & Ps	• Inspection of Cranes & Winches • Inspection of Welding and Gas cutting • Inspection of elevators etc.

HSE PERFORMANCE EVALUATION PARAMETERS

CHECKS

NON CONFORMANCE

PENALTY for NON CONFORMANCE

Refer Clause 16 Incremental
penalty

For repeated violation by the same person, the penalty would be double of the previous penalty

For repeated fatal incident in the same contract / package, incremental penalty to be imposed. The subcontractor will pay 2 times the penalty compared to the previously paid in case there are repeated cases of fatal incidents under the same subcontractor for the same package in the same unit.

COMPENSATION TO ACCIDENT VICTIMS

Refer Clause 17

Employee Compensation Act, 1922

Other Acts and Guidelines relevant to employee compensation



HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SUB-CONTRACTORS
(GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 5 of 162

ORGANIZATION OF THIS DOCUMENT

- **GENERAL SECTION**
- **SECTION A:**
MAIN REQUIREMENTS APPLICABLE IN FULL
- **SECTION B:**
SPECIAL REQUIREMENTS
- **ANNEXES**

CONTENTS

S. No.	Description	Page No.
GENERAL		
1	PURPOSE	9
2	SCOPE	9
3	OBJECTIVES AND TARGETS	10
4	REFERENCES	11
5	HEALTH, SAFETY & ENVIRONMENT POLICY	12
	MEMORANDUM OF UNDERSTANDING	13
6	TERMS & DEFINITIONS	14
SECTION-A		
7	HSE ORGANIZATION	17
7.1	DEPLOYMENT (NUMBERS, QUALIFICATIONS & EXPERIENCE)	17
7.2	HSE RESPONSIBILITIES	19
8	PLANNING BY SUBCONTRACTOR	23
8.1	MOBILISATION OF MACHINERY/EQUIPMENT/TOOLS	23
8.2	MOBILISATION OF MANPOWER BY SUBCONTRACTOR	24
8.3	PROVISION OF PPEs	25
8.4	ARRANGEMENT OF INFRASTRUCTURE	26
9	HSE TRAINING & AWARENESS	32
10	HSE PROMOTION – SIGNAGE, POSTERS, COMPETITIONS, AWARDS ETC	34
11	HSE COMMUNICATION & PARTICIPATION	35
12	INCIDENT INVESTIGATION & CORRECTIVE ACTION	36
13	SAFETY DURING WORK EXECUTION	37
13.1	HSE SYSTEMS & PROCEDURES	37
13.2	WORK PERMIT SYSTEM	39
13.3	ACTIVITY SPECIFIC SAFETY REQUIREMENTS	40
13.4	ENVIRONMENTAL CONTROL	46
13.5	HOUSEKEEPING	47



PS-ER

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SUB-CONTRACTORS
(GENERAL)

Doc. No.: HSEP:14-ER


Rev.: 00

Date: 25.04.19

Page 7 of 162

S. No.	Description	Page No.
13.6	WASTE MANAGEMENT	47
13.7	TRAFFIC MANAGEMENT	48
13.8	EMERGENCY PREPAREDNESS & RESPONSE	50
13.9	CONTROL OF DOCUMENTS	50
13.10	CONTROL OF RECORDS	50
14	HSE INSPECTION	51
15	HSE PERFORMANCE	54
16	HSE PENALTIES FOR NON-COMPLIANCE	55
17	OTHER REQUIREMENTS	56
18	INTERNAL & EXTERNAL HSE AUDITS	56
19	HSE REVIEW	57
20	FORMATS USE	58
	FORMATS	
SECTION B		
	ESTABLISHMENT OF COMMON FACILITIES / INFRASTRUCTURE	
	SHARED FACILITIES	
ANNEXES		
	ANNEXURE-1	
	ANNEXURE-2	
	ANNEXURE-3	
	ANNEXURE-A: ACTIVITY SPECIFIC REQUIREMENTS FOR SAFETY	
	ANNEXURE-B: HSE PRECAUTIONS FOR ADVERSE CLIMATES & WEATHER CONDITIONS	
	ANNEXURE-C: FIRE EXTINGUISHER REQUIREMENTS	
	ANNEXURE-D: SPECIFICATIONS	
	RECORD OF REVISIONS	

GENERAL

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER
		Rev.: 00
		Date: 25.04.19
		Page 9 of 162

1. PURPOSE

- 1.0** The purpose of this HSE Plan is to provide for the systematic identification, evaluation, prevention and control of general workplace hazards, specific job hazards, potential hazards and environmental impacts that may arise from foreseeable conditions during installation and servicing of industrial projects and power plants.
- 1.1** This document shall be followed by BHEL's Sub-Contractors at all installation and servicing sites. In case BHEL has contractual HSE obligations towards customer, this document will be followed in conjunction with (BHEL's) customer specific requirements, ensuring that applicable systems, controls and checks of both are implemented in letter and spirit.
- 1.2** In case the customer has any specific requirement, the same is to be fulfilled but may not include financial inclusion.
- 1.3** This document shall be followed unless otherwise mentioned in TCC (technical condition of contract) or elsewhere in NIT or contract documents. This supersedes all HSE clauses in GCC.
- 1.4** Although every effort has been made to make the procedures and guidelines in line with statutory requirements, in case of any discrepancy relevant statutory guidelines must be followed.

2. SCOPE

The document is applicable on all activities and assets including managerial, supervisory, professional, technical, clerical and other workers including contract laborers; and equipment operating under the control of BHEL's Subcontractors at all installation / servicing activities of BHEL Power Sector as per the relevant contractual obligations.

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER
		Rev.: 00
		Date: 25.04.19
		Page 10 of 162

3. OBJECTIVES

The HSE Plan reflects that BHEL places high priority upon the Occupational Health, Safety and Environment at workplaces. The Sub-contractor shall:

Health & Safety

- Prevent injury and ill health of all persons at site ('Persons' refers to all personnel including managerial, supervisory, professional, technical, clerical and other workers including contract laborers)

Environment

- Prevent pollution to environment and ensure protection of environment taking into account interested party concern and conservation of resources and reduction of wastage

Legal Requirements

- Comply at all times with the relevant statutory and contractual HSE requirements.

Planning & Resources

- Ensure that all work planning takes into account all persons that may be affected by the work.
- Ensure timely provision of resources to facilitate effective implementation of HSE requirements.

Competency, Training & Awareness

- Provide trained, experienced and competent personnel. Ensure medically fit personnel only are engaged at work.
- Provide all personnel with adequate information, instruction, training and supervision on the safety aspect of their work.

Maintenance of Equipment

- Ensure fitness testing of all T&Ps. Lifting appliances like cranes, chain pulley blocks etc. are certified by competent authority.

Safety during Operations

- Provide and maintain plant, places and systems of work that are safe and without risk to health and the environment.
- Effectively control, co-ordinate and monitor the activities of all personnel on the Project sites including subcontractors in respects of HSE.
- Establish effective communication on HSE matters with all relevant parties involved in the Project works.

HSE Improvement

- Capture the data of all incidents including near misses, process deviation etc. Investigate and analyze the same to find out the root cause
- Ensure timely implementation of correction, corrective action.
- Ensure continual improvement in HSE performance

GOALS AND TARGETS

- ❖ **To achieve “Zero Incident at Site” (LTI)**
- ❖ **100% compliance of all legal/statutory requirements related to HSE.**
- ❖ **100% Health, Safety and Environmental Induction training attendance for all workers.**
- ❖ **100% High Risk activities to be carried out only after approved Method Statement, HIRA / Aspect-Impact / JSA / OCP and Permit to Work are implemented.**
- ❖ **100% PPEs compliance in high and medium risk activities.**
- ❖ **100% monitoring of all Work Areas**
- ❖ **100% detection of non-conformities in work area and 100% closure within specified time**
- ❖ **100% incident (near miss, minor, major, other) reporting, recording and reviewing for corrective actions.**
- ❖ **Regular Safety Reviews to assess HSE program compliance and 100% closure of any recognized gaps to continually improve safety management and incident prevention.**

4. REFERENCES

1. ALL CONTRACTUAL HSE REQUIREMENTS INCLUDING THIS DOCUMENT
2. ALL APPLICABLE ACTS, RULES & REGULATIONS
3. BHEL POWER SECTOR HSE MANAGEMENT SYSTEM
 - I. HSE PROCEDURES (13.1.1)
 - II. WORK PERMITS (See Clause 13.1.2)
 - III. OPERATIONAL CONTROL PROCEDURES (See Clause 13.1.3)
 - IV. FORMATS (See Clause 21)
4. BHEL CORPORATE STANDARD PPE GUIDELINES
5. RELEVANT INDIAN STANDARDS FOR SAFETY (See Annexure 02)

(Note: Wherever, the date or revision number of a document is not mentioned, latest revision is implied)

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER Rev.: 00 Date: 25.04.19 Page 12 of 162

5. *BHEL HEALTH, SAFETY & ENVIRONMENT POLICY:*

In BHEL, Health, Safety and Environment (HSE) responsibilities are driven by our commitment to protect our employees and people we work with, community and environment. BHEL believes in zero tolerance for unsafe work/non-conformance to safety and in minimizing environmental footprint associated with all its business activities. We commit to continually improve our HSE performance by:

- Developing safety and sustainability culture through active leadership and by ensuring availability of required resources.
- Ensuring compliance with applicable legislation, regulations and BHEL systems.
- Taking up activities for conservation of resources and adopting sound waste management by following Reduce/Recycle/Reuse approach.
- Continually identifying, assessing and managing environmental impacts and Occupational Health & Safety risks of all activities, products and services adopting approach based on elimination/substitution/reduction/control.
- Incorporating appropriate Occupational Health, Safety and Environment criteria into business decisions, design of products & systems and for selection of plants, technologies and services.
- Imparting appropriate structured training to all persons at workplace and promoting awareness amongst customers, contractors and suppliers on HSE issues.
- Reviewing periodically this policy and HSE Management Systems to ensure its relevance, appropriateness and effectiveness.
- Communicating this policy within BHEL and making it available to interested parties.



Atul Sobti
Chairman & Managing Director

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER Rev.: 00 Date: 25.04.19 Page 13 of 162

6. TERMS AND DEFINITIONS

6.0 INCIDENT

Work- related or natural event(s) in which an injury or ill health (regardless of severity) or fatality, damage to property/environment occurred, or could have occurred.

6.1 NEAR MISS

An incident where no ill health, injury, damage or other loss occurs, but it had a potential to cause, is referred to as "Near-Miss incident".

6.2 MAN-HOURS WORKED

The total number of employee hours worked by all employees including subcontractors working in the premises.

It includes managerial, supervisory, professional, technical, clerical and other workers including contract laborers.

Man-hours worked shall be calculated from the payroll or time clock recorded including overtime. When this is not feasible, the same shall be estimated by multiplying the total man-days worked for the period covered by the number of hours worked per day. The total number of workday for a period is the sum of the number of men at work on each day of period. If the daily hours vary from department to department separate estimate shall be made for each department and the result added together.

6.3 FIRST AID CASES (FAC)

First aid cases include:

1. Visit to a physician or a licensed health care professional solely for observation or counselling
2. Conduct of diagnostic procedures like X rays, blood test including the prescription medications used solely for diagnostic purposes (e.g. eye drops to dilate eyes)
3. Using a non-prescription medicine at non-prescription strength (for medication available in both prescription and non-prescription form as recommendation by a physician or other licensed health care professional to use a non-prescription medication at prescription strength is considered medical treatment for record keeping purposes);
4. Administering tetanus immunizations (other immunizations, such as Hepatitis B vaccine or rabies vaccine, are considered medical treatment);
5. Cleaning, flushing or soaking wounds on the surface of the skin;
6. Using wound coverings such as bandages, Band-Aids TM, gauze pads, etc.; or using butterfly bandages or Steri-Strips TM (other wound closing devices such as sutures, staples, etc., are considered medical treatment);
7. Using hot or cold therapy;
8. Using any non-rigid means of support, such as elastic bandages, wraps, non-rigid back belts, etc. (devices with rigid stays or other systems designed to immobilize parts of the body are considered medical treatment for record-keeping purposes);

9. Using temporary immobilization devices while transporting an accident victim (e.g., splints, slings, neck collars, back boards, etc.).
 10. Drilling of a fingernail or toenail to relieve pressure, or draining fluid from a blister;
 11. Using eye patches;
 12. Removing foreign bodies from the eye using only irrigation or a cotton swab;
 13. Removing splinters or foreign material from areas other than the eye by irrigation, tweezers, cotton swabs or other simple means;
 14. Using finger guards;
 15. Using massages (physical therapy or chiropractic treatment are considered medical treatment for recordkeeping purposes); or
 16. Drinking fluids for relief of heat stress.
- No other treatments are considered first aid.

6.4 MEDICAL TREATMENT CASES (MTC)

An incident involved with an injury or illness that needs medical attention beyond First-aid as per 6.3 above.

6.5 Dangerous Occurrence is defined as:

- (1) Collapse or failure of lifting appliances or hoist or conveyors or other similar equipment/machine;
- (2) Collapse or failure of a crane, derrick, winch, hoist or other appliance used in raising or lowering persons or goods or any part thereof, or the overturning of a crane;
- (3) Explosion or fire causing damage to the structure of any room or place in which persons are employed, or to any machine or plant, resulting in the complete suspension of ordinary work;
- (4) Electrical short circuit or failure of electrical machinery, plant or apparatus, attended by explosion or fire, causing structural damage involving its stoppage or disuse;
- (5) Explosion of a receiver or container used for the storage at a pressure greater than atmospheric pressure of any gas or gases (including air) or any liquid or solid resulting from the compression of gas;
- (6) Collapse in whole or part from any cause whatsoever of any roof, wall, floor, Structure or foundation forming part of the construction site in which persons are employed;
- (7) Total or partial collapse of any overburden, face, tip or embankment on the Construction site;
- (8) The overturning of, or collision with any object by any bulldozer, dumper, excavator, grader, lorry or shovel loader, or any mobile machine used for the handling of any substance on the construction site.

6.6 **Fire:** Except Dangerous occurrence, any incident involving fire.

6.7 **Property Damage:** Except Dangerous Occurrences and Fire, any incident of property (materials, building, equipment etc) getting damaged.

6.8 TYPE OF INCIDENT / ACCIDENT & THEIR REPORTING:

The categories of Incident / accident are as follows:

Non-Reportable Cases or NON-LTI: (Including First-aid cases as per 6.3 and MTC as per 6.4)

Minor: In this case the injured person resumes duty within 48 hours of incident.

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)	Doc. No.: HSEP:14-ER Rev.: 00 Date: 25.04.19 Page 15 of 162

Reportable Cases (LTI or Loss Time Injury Cases):

Major: In this case the injured person is disable for 48 hours or more and is not able to perform his duty. (as per IS 3786). It includes fatality.

All incidents must be reported orally immediately and in writing within 24 hours of time of incident. However, in case of fatality, it shall be reported to the statutory authority within prescribed timeline through proper channel. Internal reporting shall be done within 6 hours of time of the incident

6.9 TOTAL REPORTABLE FREQUENCY RATE

Frequency rate is the number of Reportable Lost Time Injury (LTI) per one Million Man hours worked. Mathematically, the formula read as:

$$\frac{\text{Number of Reportable LTI}}{\text{Total Man Hours Worked}} \times 1,000,000$$

6.10 SEVERITY RATE

Severity rate is the Number of days lost due to Lost Time Injury (LTI) per one Million Man hours worked. Mathematically, the formula reads as:

$$\frac{\text{Days lost due to LTI}}{\text{Total Man Hours Worked}} \times 1,000,000$$

6.11 FREQUENCY SEVERITY INDEX (FSI)

Frequency Severity Index, $FSI = \sqrt{FR \times SR / 1000}$

6.12 INCIDENCE RATE

Incidence Rate is the Number of LTI per one thousand manpower deployed. Mathematically, the formula reads as:

$$\frac{\text{Number of LTI} \times 1000}{\text{Average number of manpower deployed}}$$

6.13 JOB SAFETY ANALYSIS

A job safety analysis (JSA) is a procedure which helps integrate accepted safety and health principles and practices into a particular task or job operation. In a JSA, each basic step of the job is to identify potential hazards and to recommend the safest way to do the job. Other terms used to describe this procedure are job hazard analysis (JHA) and job hazard breakdown.



POWER SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SUB-CONTRACTORS (GENERAL)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 16 of 162

6.14 SAFETY WALK

It's a walk (conducted periodically) by an official through a portion or whole of a site as an HSE officer, noting down HSE observations, speaking to concerned workmen and supervisor on observation, recording and reporting to in charges of agencies, getting the same rectified with personal follow up - to send out a strong message on Management's commitment to safety.

6.15 HEAVY & COMPLEX LIFTING

A heavy and complex lifting activity includes:

1. Lifting above 50 Tons
 2. Tandem Lifting using multiple cranes
 3. Total load exceeding 75% of capacity of crane
 4. Lift of unusual difficulty or geometry or rigging
 5. Lift over operating units
 6. Any other lift as decided by site HSE / Erection
- In any case, Job Safety Analysis to be carried out for any lift above 5 Tons.

6.16 SAFETY COMMITTEE

As per the BOCW, Safety Committee shall be constituted if there are more than five hundred or more construction workers are employed at any site. As per the Factories Act, 1948 it is for 250 workers. It shall be represented by equal number of representatives of employer and construction workers.

6.17 NIGHT WORK

Work conducted after sunset when only a fraction of total manpower is available

Section-A

Main Requirements

(Applicable in Full)



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date: 25.04.19

Page 18 of 58

7. HSE ORGANISATION

7.1 DEPLOYMENT

7.1.1 Minimum Number (Availability per contract / package per Working Shift)

7.1.1.1 HSE Officer	7.1.1.2 HSE Supervisor	7.1.1.3 HSE Steward / Observer
1 per 300 workers or part thereof as a minimum or as mandated by applicable legal requirements, whichever more stringent	1 per 150 workers or part thereof	1 per 50 workers or part thereof

7.1.1.4 The safety officers shall be engaged directly by the sub-contractor, whereas safety supervisors and safety stewards may be from the agencies engaged by the sub-contractor.

7.1.1.5 Deployment Plan:

- 7.1.1.5.1 These shall be minimum one HSE officer along with HSE supervisor and HSE steward in the aforesaid ratio for every shift for each unit of Boiler/ESP/Power House & TG/ Chimney/ Whole of Cooling Tower.
- 7.1.1.5.2 For Civil works and other BOP items, deployment shall be broadly as specified in the above table. But BHEL shall finally approve the deployment based on nature and volume of jobs, Risks and hazards associated etc.
- 7.1.1.5.3 The deployment plan of Safety manpower at various locations shall be submitted to BHEL for approval by subcontractor

BHEL reserves the right to demand more safety personnel than what is stipulated here and change the deployment pattern



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-ER

Rev.: 00

Date:

Page **19** of **58**

7.1.2 QUALIFICATION & EXPERIENCE

All Degrees/ Diplomas shall be recognized by State Council for Technical Education & Vocational Training (SCTE & VT) / All India Council for Technical Education (AICTE) / University

7.1.2.1 HSE Officer	7.1.2.2 HSE Supervisor	7.1.2.3 HSE Steward / Observer
A. i. Recognized degree in any branch of Engg. or Tech. or Architecture with practical experience of working in a building or other construction work in supervisory capacity for a period of not less than two years, or Recognized diploma in any branch of Engg. or Tech with practical experience of working in a building or other construction work in supervisory capacity for a period of not less than five years. ii. Recognized degree or diploma in Industrial safety ii. (Preferably) have adequate knowledge of the language spoken by majority of the workers at the construction site. Alternatively: B. Graduation Degree in Science with Physics & Chemistry and degree or diploma in Industrial Safety (from any Indian institutes recognized by AICTE or State Council of Tech. Education of any Indian State) with practical experience of working in a building, plant or other construction works (as Safety Officer, in line with Indian Factories Act, 1958) for a period of not less than five years.	As a minimum, (s)he shall possess: A recognized graduation Degree in Science (with Physics & Chemistry) or a recognized diploma in Engg. or Tech. with: a. Minimum Two years of practical experience in construction work environment and b. Should possess requisite skills to deal with construction safety & fire related day-to-day issues.	As a minimum, (s)he shall possess: 1. Class XII pass certificate and 2. Trained in fire-fighting as well as in safety / occupational health related subjects, with: a. Minimum two year of practical experience in construction work environment and b. Should have adequate knowledge of the local language spoken by majority of the workers at the construction site.

7.1.3 HSE IN-CHARGE

In case there are more than one HSE Officers with any subcontractor, one of them, who is senior most by experience (in HSE discipline), may be designated as HSE In-Charge. Duties & responsibilities of such person shall be commensurate with that of relevant statute and primarily to coordinate with top management of Client and subcontractors.

7.1.4 AVAILABILITY AND PENALTY FOR NON-DEPLOYMENT:

Subcontractor shall ensure physical availability of safety personnel at the place of specific work location including where Height Work Permit is required/granted. No work shall be started in any area until above safety personnel & concerned Site Engineer of subcontractor are physically deployed at site.

The Subcontractor shall prepare an organization chart identifying the areas of operations, responsibilities and reporting structure of all safety personnel and submit the same to BHEL.

The subcontractor shall deploy sufficient safety officers, supervisors and safety-stewards, as per numbers & qualifications mandated in this Section since mobilization of first batch of manpower and add more in proportion to the added strength in work force. Any delay in deployment will attract a penalty at following rates:

Non-deployment of HSE Officer	–	Rs 50000 per man-month
Non-deployment of HSE Supervisor	–	Rs 30000 per man-month
Non-deployment of HSE Steward	–	Rs 20000 per man-month

Penalty shall be collected for the period of non-availability of safety personnel after allowing a grace period of 15 days for finding a replacement.

7.1.5 QUALIFICATION OF CRANE & WINCH OPERATORS, DRIVERS etc.:

The Crane and Winch Operators, Drivers, Riggers and other professionals deployed shall be qualified and experienced, and have valid license for the class of vehicle / machinery as applicable. The subcontractor shall certify competence of these persons.in writing as and when they join.

Crane/Winch operator should have certificate on subject course or owner experience certificate in letterhead.

7.1.6 In case the statutory requirements i.e. State or Central Acts and / or Rules as applicable like the Building and Other Construction Workers' Regulation of Employment and Conditions of Service- Act,1996 or State Rules (wherever notified), the Factories Act, 1948 or Rules (wherever notified), etc. are more stringent than above clarifications, the same shall be followed.

7.1.7 **BILLING:** Deployment of Safety manpower as per this clause **shall be** a billable item.

7.1.8 The Subcontractor shall verify & authenticate credentials of the HSE personnel detailed in this Section and furnish Bio-Data/Resume / Curriculum Vitae of the safety personnel as above for BHEL / Owner's approval, at least 1 month before the mobilization. The Subcontractor, whenever required, shall arrange submission of original testimonials / certificates of their Safety personnel, to BHEL / Owner (for verification/scrutiny, etc.)

7.1.9 Prior approval of CVs by BHEL for Safety Officer and Safety Supervisor is mandatory, however BHEL has right to check suitability of Safety Stewards as well.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 21 of 162

7.2 HSE RESPONSIBILITIES

The subcontractors shall communicate the HSE responsibilities as indicated in this section to relevant employees in written Form and ensure awareness of the same

7.2.1 ALL EMPLOYEES

1. To be aware of, get involved in and ensure implementation of all HSE related Systems and Procedures including but not limited to:
 - a) BHEL HSE Management System including HSE Procedures and OCPs
 - b) Work Permit System
 - c) Emergency Preparedness Response Plans
 - d) Contractual HSE requirements
 - e) Legal Requirements
 - f) Penalty System
 - g) Training requirements
2. To ensure that the persons engaged in respective area follow the safety rules like using appropriate PPEs.
3. To keep track of repetitive minor or major incident observation/ report and submit to BHEL.
4. To prepare HIRA / JSA as required and submit to BHEL for verification.
5. To record all incidents including near miss and report to BHEL.
6. To adopt safe working practices at all times and act as role model for Safety
7. To take immediate corrective action actions in case any non-conformity is observed on product / process / system with respect to Occupational Health, Safety and Environment.
8. In case any particular activity / work has extremely high consequential risk or high environmental impact, same shall be brought to the notice of BHEL Package In-charge before starting the work.
9. To interfere/ stop work as & when identified unsafe.
10. To maintain & promote improved level of house-keeping all the time at site.
11. To support/co-operate with audit team members as & when safety audits are carried out.
12. To involve in investigation, if any incident occurs in his work area.
13. To participate in safety promotional programmes.
14. To attend the safety committee meeting, if member/ invitee
15. To ensure that only fit T&Ps and qualified persons are engaged for all activities.
16. Shall ensure that person working above 2.0 meter should use Safety Harness tied to a life line/stable structure.
17. Shall ensure that materials are not thrown from height. Cautions to be exercised to



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 22 of 162

prevent fall of material from height.

18. Shall ensure that all T&Ps engaged are tested for fitness and have valid certificates from competent authorities.

7.2.2 SITE IN –CHARGE & PACKAGE IN-CHARGES OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. **Shall ensure fulfillment of HSE requirements of BHEL contract as given in this document.**
3. Shall engage qualified safety manpower as per this document at all times.
4. Shall adhere to the rules and regulations mentioned in this document, practice very strictly in his area of work in consultation with his concerned engineer and the safety coordinator.
5. Shall screen all workmen for health and competence requirement before engaging for the job and periodically thereafter as required.
6. Shall ensure that all the workers are engaged after undergoing induction training.
7. Shall arrange for all necessary PPEs like safety helmets, belts, full body harness, shoes, face shield, hand gloves etc. before starting the job. Shall ensure that no working men /women carry excessive weight more than stipulated in Factory Rule Regulation R57.
8. Shall ensure that provisions stipulated in contract Labor Regulation Act 1970, Chapter V C.9, canteen, rest rooms/washing facilities to contracted employees at site.
9. Shall report all incidents (Fatal/Major/Minor/Near Miss) to the Site engineer /HSE officer of BHEL.
10. Shall conduct Safety Walks and safety inspections, and act as a role model for Safety.
11. Shall ensure that Horseplay is strictly forbidden.
12. Shall ensure that adequate illumination is arranged during night work.
13. Shall ensure that all personnel working under subcontractor are working safely and do not create any Hazard to self and to others.
14. Shall ensure display of adequate signage/posters on HSE.
15. Shall ensure that mobile phone is not used by workers while working.
16. Shall ensure conductance of HSE audit, mock drill, medical camps, induction training and training on HSE at site.
17. Shall ensure full co-operation during Client/External /Customer HSE audits.
18. Shall ensure submission of look-ahead plan for procurement of HSE equipment's and PPEs as per work schedule.
19. Shall ensure adequate valid fire extinguishers are provided at the work site.
20. Shall ensure availability of sufficient number of toilets /restrooms and adequate drinking water at work site and labor colony.
21. Shall ensure adequate emergency preparedness
22. Site In-charge also involve in the induction training so as to share knowledge of some incident and guide the worker to perform work safely.
23. Shall ensure power source for hand lamps shall be maximum of 24 v.
24. Shall ensure temporary fencing should be done for open edges if Hand – railings and Toe-



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 23 of 162

guards are not available.

25. Shall be responsible for the periodic testing of T&Ps (winches / crane /hydra/tools/equipment so on.) and Pressure Vessels as per applicable codes and submit report to BHEL
26. Shall be member of site HSE committee and attend all meetings of the committee

7.2.3 HSE OFFICER OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. Carry out safety inspection of Work Area, Work Method, Men, Machine & Material, P&M and other tools and tackles.
3. Facilitate HIRA and Aspect/Impact Study in the area and ensure control measures.
4. Highlight the requirements of safety through Tool-box / other meetings.
5. Help concerned HOS to prepare Job Specific instructions for critical jobs.
6. Maintain record and conduct investigation of all incident/dangerous occurrences & recommend appropriate safety measures.
7. Advice & co-ordinate for implementation of HSE permit systems, OCPs & MPs.
8. Convene HSE meeting & minute the proceeding for circulation & follow-up action.
9. Plan procurement of PPE & Safety devices and inspect their healthiness.
10. Report to BHEL on all matters pertaining to status of safety and promotional programmes at site level.
11. Encourage raising Near Miss Report on safety along with, improvement initiatives on safety.
12. Facilitate administration of First Aid
13. Facilitate screening of workmen and safety induction.
14. Conduct fire Drill and facilitate emergency preparedness
15. Design campaigns, competitions & other special programs to promote safety in the workplace.
16. Notify non-conformance to safety norms observed during site visits / site inspections.
17. Recommend to Site In-charge, immediate discontinuance of work until rectification, of such situations warranting immediate action in view of imminent danger to life or property or environment.
18. To decline acceptance of such PPE / safety equipment that do not conform to specified requirements.

7.2.4 HSE SUPERVISOR OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. To assist Safety officer

7.2.5 HSE STEWARD / OBSERVER OF SUBCONTRACTOR

1. All requirements as per 7.2.1
2. To monitor allotted area for Safety violations, take required action and inform the concerned Safety Supervisor / Officer



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 24 of 162

3. To assist Safety Officer and Safety Supervisor

7.2.6 HSE DOCUMENTS, SYSTEMS & PROCEDURES:

BHEL shall provide the subcontractor soft copies of all applicable HSE Procedures, Work Permits, Operational Control Procedures, Formats and any other instructions required for the implementation of HSE Management System before commencing operations at site. Subcontractor shall ensure the availability of the same.

7.2.7 IMPORTANT SITE EHS RULES RESULTING IN POSSIBLE EXPULSION FROM SITE

- ❖ Pre-employment Medical fitness is compulsory for all workers.
- ❖ EHS induction is mandatory for all new workers, supervisor and engineers, subcontractor managers etc.
- ❖ No visitors are allowed for site visit without safety induction.
- ❖ **Mandatory PPEs are**
 - ✓ Safety helmet,
 - ✓ Hard toe safety shoes,
 - ✓ Safety glasses
 - ✓ Reflective vest
 - ✓ Full/half sleeve (at least 4-inch-long) shirt
 - ✓ Full length pant/trousers for male and preferably Salwar Kameez for female
- ❖ **Zero Tolerance Safety Rules**
 - Violation of Fall protection / not anchoring & wearing safety harness above 6 feet,
 - Work without PTW
 - Child labor at site
- ❖ Restricted Use of cell phone in the working zone, operating vehicle/crane and at height. Encourage the people not to bring mobile phones inside the project premises.
- ❖ All vehicle being used at site to be in good condition in all respect.
- ❖ All electrical installations should have individual 30 mA ELCBs
- ❖ **Fighting:** Fighting anywhere on the Project site, including in parking areas, is strictly forbidden; violators will be barred from site and possibly subjected to legal action by local authorities.
- ❖ **Horseplay:** Running, pushing, practical jokes, and other horseplay are forbidden on the project site, including in parking areas.
- ❖ **Gambling:** Gambling on the Project site is not permitted
- ❖ **Alcohol & Drugs:** Intoxication or possession of alcohol or illegal drugs is strictly forbidden.
- ❖ **Weapons:** Possession of weapons on the Project site is strictly prohibited
- ❖ **Asbestos Material:** No asbestos material is allowed to use in Project Site
- ❖ **Hair:** Anyone working on site property with scalp hair longer than the top of his/her shoulders must tie-up and restrains the hair within the hard hat or coveralls, shirt or jacket collar.
- ❖ **Jewelry:** Loose necklaces, dangling earrings and bracelets shall not be worn when working on the Project site.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 25 of 162

- ❖ **Contact Lens:** While the site does not prohibit the wearing of contact lens, BHEL Project does not recommend their use.
- ❖ **Use of Empty Drums:** Use of empty drums to climb up and work is banned. Proper stool/ ladder/ stage required to be used if intended to work at height.
- ❖ Projects must comply in full with all applicable EHS local and national legislation. In circumstances where there is a conflict between local or national legislation and client requirements, the higher (more protective) requirement must prevail.
- ❖ All persons working on suspended scaffolds/cradles/gondolas must wear and use appropriate fall prevention equipment so as to protect them effectively at all times when they are at risk from any failure of any part of the scaffold/cradle/gondola, including its suspension system
- ❖ **Construction Trucks/Vehicles**
 - ✓ Vehicles must be equipped with proper seat belts for driver and passengers. All persons riding in vehicles must be advised of the requirement that seat belts are to be used whenever the vehicles are being operated.
 - ✓ The subcontractor is responsible for assuring the overall safe condition of vehicles assigned to its projects.
 - ✓ The speed limit on the project site is a maximum of 20 Km/hr.
 - ✓ Any person found operating or driving in a reckless or careless manner without regard for the safety of other employees or the general public will be immediately removed for the equipment they were operating and permanently prohibited from operating or driving any equipment on the project.
 - ✓ Any mobile equipment found to be unsafe or defective must be immediately removed from service and sent for repair or replacement. The subcontractor must ensure that the proper repairs have been made prior to putting the equipment back into service.
- ❖ **Construction Material Handling Heavy Equipment**
 - ✓ No equipment may be modified without equipment manufacturer's authorization.
 - ✓ Rollover Protective Structures must be provided for all equipment as required.
 - ✓ Seat belts must be provided and used by operators of all equipment that has a Rollover Protective Structure.
 - ✓ All bi-directional equipment must be equipped with an operable horn that must be used as needed when the machinery is moving in either direction.
 - ✓ All bi-directional equipment must also have an operable alarm in addition to the horn.
 - ✓ All equipment must be provided with a multi-purpose (class A, B, and C) fire extinguisher mounted in an easily accessible location.
 - ✓ Braking systems, controls, safety devices must be maintained in effective operating condition.
 - ✓ The operator must inspect the equipment at the beginning of the shift and test for acceptable



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 26 of 162

- ✓ operation as per the equipment's manufacturer's instructions. Inspections must be documented and filed.
- ✓ Only qualified personnel must be allowed to operate equipment. Qualification must be documented and filed.

In case any worker violates any of the EHS rules identified by BHEL as above, following punitive action shall be taken:

First Offence	Second Offence	Third Offence	Fourth Offence
Oral warning	Gate Pass Punched	Gate pass punched (second)	Gate Pass Punched(third) and person sent out of the gate Photo of concerned worker to be displayed on Notice boards and prominent locations.

BHEL has the right to send out such person even earlier than fourth offence after considering the severity of the offence and/or the persons track record related to following general/EHS rules.

BHEL reserves right to expel even concerned supervisor or engineer as well in case of repeat of such cases of indiscipline.

Note:

The appellate authority in this case shall be the BHEL Site In-charge whose decision shall be final on the matter and binding on all parties.

8. PLANNING FOR HSE

A. Identifying Hazards / Risks & Aspects / Impacts and implementing control measures

1. Subcontractor shall identify all OHS Hazards and Risks applicable to all activities in scope as per *HSEP01: HSE Procedure for OHS Hazards and Risks*, and plan & implement the required control measures.
2. Subcontractor shall identify all Environmental Aspects and Impacts applicable to all activities in scope as per *HSEP02: HSE Procedure for Environmental Aspects and Impacts*, and plan & implement the control measures.

B. Register of Regulations:

Subcontractor shall prepare a register of applicable rules and regulations in the scope as per



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 27 of 162

HSEP03: HSE Procedure for Register of Regulations and plan to ensure compliance.

The detailed plans and registers in A and B to be submitted to BHEL for review and approval within 60 days of start of work at site.

Note: The plans above are dynamic and shall be periodically reviewed as per BHEL requirement.

8.1 MOBILISATION OF MACHINERY / EQUIPMENT / TOOLS

1. Subcontractor shall furnish to BHEL, the Test Certificates issued by the jurisdictional competent persons of machinery, equipment and other T&Ps to be deployed at site, before deployment. BHEL reserves the right to disallow the same if found non-conforming to HSE / legal requirements
2. As a further measure to ensure that machinery, equipment and tools being mobilized to the construction site are fit for purpose and are maintained in safe operating condition and comply with legislative and owner requirement, inspection shall be arranged by in-house expert / competent authority (preferable) for acceptance. **(Report Format: HSEP:14-F15)**
3. **The equipment considered for this purpose shall include all those in the T&P list in the tender document. Conventional Hydra crane with carriage in front shall not be permitted. Other models like FX or TRX series of Escorts or equivalent shall be permitted.**
4. In the course of work, the subcontractor shall notify the BHEL Engineer, of his intention to bring on to site any equipment or any container, with liquid or gaseous fuel or other substance which may create a hazard.
5. The Engineer shall have the right to prescribe the condition under which such equipment or container may be handled and used during the performance of the works and the subcontractor shall strictly adhere to such instructions.
6. The Engineer shall have the right to inspect any construction tool and to forbid its use, if in his opinion it is unsafe. No claim due to such prohibition will be entertained.
7. Following items should be only ISO certified and not more than 2 yr. of purchase
 - i. Chain pulley block
 - ii. Wire rope slings
 - iii. Grinding machine and wheel and buffing wheel
 - iv. Gas cutting equipment
8. Following equipment should not be more than 5 Yr. old
 1. Welding machine
 2. Vibrator Machine
 3. Concrete cutter
 4. DB/Electrical panel
9. **Office Infrastructure** - subcontractor shall arrange a computer / Laptop with Network

connection, chair and table for HSE Staff to facilitate HSE reporting and recordkeeping.

8.2 MOBILISATION OF MANPOWER

1. As a measure to ensure that manpower being mobilized to the construction site is fit and competent for safe working, screening arrangement shall be made by the sub-contractor to ensure fulfillment of contractual as well as legislative requirement by:
 - i. Ensuring the required qualification/ training/ certification/ license and experience for the job as per Section 7 of this document & applicable legal requirements
 - ii. **Medical Checkup:** Examination of medical fitness shall be conducted through qualified medical professional for all workers to be deployed. (Record: Format No. HSEP14:F02). For height workers, height phobia test to be carried out as qualification criteria.
 - iii. **Induction Training:** Induction training of all workers to be ensured as per clause 9.1 and HSEP04: *HSE Procedure for Training & Awareness* (Record: Format No. HSEP14:F03)

Only on successfully meeting above criteria, permanent gate passes to be issued.

2. The subcontractor shall strictly adhere to the maximum daily working hours and other requirements as per applicable laws and shall not engage any employee below 18 years of age.
3. The subcontractor shall take special care of the employees affected with occupational diseases under rule 230 and schedule II of BOCW Rules. The employees not meeting the fitness requirement should not be engaged for such job.
4. Ensure that the regulatory requirements of excessive weight limit (to carry / lift / move weights beyond prescribed limits) for male and female workers are complied with.
5. System for Issue of Gate Passes to authorized personnel only shall be ensured at site
6. The subcontractor shall keep accurate and updated records of all manpower preferably in soft form
7. The subcontractor shall ensure appropriate infrastructure for workers as per Clause 8.4.

8.3 PROVISION OF PPEs

1. Adequate numbers of Personnel Protective Equipment (PPEs), will be made available at site & their effectiveness and regular use by all will be ensured
2. The PPEs shall conform to the relevant standards as listed in Annexure 02, and bear ISI mark.
3. The following matrix recommends usage of minimum PPEs against the respective job. For details, the respective OCPs to be referred.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 29 of 162

Sl. No	Type of work	Suggested PPEs
1	Work at height	Double lanyard full body harness with rope grab (as applicable), retractable Fall arrestor (specific cases), Safety nets (single / double)
2	Concrete and asphalt mixing	Nose mask, hand glove, apron, gum boot, goggles
3	Welders/ Grinders/ Gas cutters	Welding/face screen, apron, hand gloves, nose mask and ear muffs if noise level exceeds 90dB. Helmet fitted with welding shield is preferred for welders, safety goggles
4	Stone/ concrete breakers	Ear muffs, safety goggles, hand gloves
5	Electrical Work	Rubber hand glove, Electrical Resistance shoes, Arc-flash resistant suit.
6	Insulation Work	Respiratory mask, Hand gloves, safety goggles
7	Grit/Sand blasting	Blast suit, blast helmet, respirator, leather gloves, safety goggles
8	Painting	Plastic gloves, Respirators (particularly for Spray painting)
9	Radiography	As per BARC guidelines
10	General	Helmets, Safety Shoes Reflective vests, ear plugs, nose masks, safety goggles

- The exact PPEs required for a particular task shall be chosen to ensure there are multiple lines of defense against accident or injury. All applicable safety precautions for a job shall be ensured notwithstanding the duration or perceived importance of the task.
- Additionally, the BHEL safety officer may demand additional PPEs based on specific requirement
- The applicability of PPEs shall be as per the concept of Hierarchy of controls, i.e.: Elimination->Substitution->Engineering Controls->Administrative Controls-PPEs
- Relying solely on PPEs without other applicable controls to be strictly avoided.
- The issuing agency shall maintain register for issue and receipt of PPEs (Format No. HSEP: 14-F06A). All the PPEs shall be checked for quality before issue and shall be periodically re-checked. The users shall be advised to check the PPEs themselves for any defect before putting on. The defective ones shall be replaced.
- The body harnesses shall be serial numbered.
- All worker should wear reflecting Jacket during both shift Day/Night.
- Where workers are employed in sewers and manholes, which are in use, the subcontractor shall ensure that the manhole covers are opened and ventilated at least for an hour before the workers are allowed to get into manhole, and the manholes so opened shall be cordoned off with suitable railing and provided with warning signals or boards to prevent incident to the public
- Besides the PPEs mentioned above, the persons shall use helmet, safety shoe and reflective vest at all times. The visitors shall use Helmet and any other PPEs as



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 30 of 162

deemed appropriate for the area of work.

13. Following color scheme for Helmets to be maintained:

- Workmen: Yellow
- Safety staff: Green or white with green band
- Electrician: Red
- Others including visitors: White

14. The Helmets shall have logo or name (abbreviation of agency name permitted) affixed or printed on the front along with the person's gate pass no. & blood group. An awarded worker shall have reflective logo

8.4 ARRANGEMENT OF INFRASTRUCTURE

The subcontractor is responsible for ensuring and maintaining the required HSE infrastructure at site as described in this Section

8.4.1 DRINKING WATER

1. Drinking Water Storage Tanks shall be provided and maintained at suitable places at different elevations / locations to ensure easy accessibility. The tank/container shall be kept on a platform at an elevation of at least 2 feet and should be covered:



2. **Construction and Quantity:** The design of Drinking Water Storage Tank (DWST) shall be submitted to BHEL for approval prior to initiating construction. Provision of 5 liter water daily for each worker to be maintained.
3. **Labelling:** DWST should be labeled as "Drinking Water". Date of last cleaning, next due date shall be indicated on the container besides Date of source testing as per IS 10500.
4. Cleaning of the DWST shall be ensured at least once in a week. Mild cleaning detergents as used for cleaning vessels shall be applied and scrubbers (3M or equivalent) shall be used for removing scales and deposits on the inside surface. The tank shall be thoroughly cleaned with potable water only before it is refilled.
5. Suitability of the water source should be tested as per IS10500.
6. For all tanks containing water unsuitable for drinking, prominent "Do Not Drink" signage shall be pasted in English, Hindi and local language.
7. In Hot Work and other critical areas, drinking water shall be made available near the activity
8. Provision of supplying drinking water to height workers and those working in difficult to reach

areas shall be made available through dedicated personnel.

8.4.2 PROVISION OF LATRINES AND URINALS AT SITE (Ref: Interstate Migrant Workmen (Regulation & Employment and Act, 1979) read with The Inter-State Migrant Workmen (Regulation of employment and conditions of service) central rules, 1980 (PI refer rule no. 42)

LATRINES

1. Latrines shall be provided in every establishment on the following scale, namely: -
 - a. Where females are employed, there shall be at least one latrine for every 25 females;
 - b. Where males are employed, there shall be at least one latrine for every 25 males:

Provided that where the number of males or females exceeds 190, it shall be sufficient if there is one latrine for 25 males or females, as the case may be, up to the first 100, and one for every 30 thereafter
2. Every latrine shall be under cover and so partitioned off as to secure privacy, and shall have a proper door and fastenings.
3. Where workers of both sexes are employed there shall be displayed outside each block of latrine and urinal a notice in the language understood by the majority of the workers '**For Men Only**', or '**For Women Only**', as the case may be.
4. The notice shall also bear the figure of a man or of a woman, as the case may be.

URINALS

5. There shall be at least one urinal for male workers up to fifty and one for female up to fifty employed at a time:
6. Provided that where the number of male or female workmen, as the case may be, exceeds 500 it shall be sufficient if there is one urinal for every fifty females up to the first 500 and one for every 100 or part thereof thereafter.
7. The urinals shall be designed and located so as to ensure privacy.
8. In case a structure encompasses multiple floors, urinals shall be provided suitably for quick access
9. The latrines and urinals shall be conveniently situated and accessible to workers at all times at the establishment.
10. The latrines and urinals shall be adequately lighted and shall be maintained in a clean and sanitary condition at all times.
11. Latrines and urinals other than those connected with a flush sewage system shall comply with the requirements of the public health authorities.
12. Water shall be provided by the means of tap or otherwise so as to be conveniently accessible in or near the latrines and urinals.

8.4.3 WASHING FACILITIES

1. In every workplace, adequate and suitable facilities for washing shall be provided and maintained.
2. Separate and adequate cleaning facilities shall be provided for the use of male and female workers. Such facilities shall be conveniently accessible and shall be kept in clean and hygienic



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 32 of 162

condition and dully illuminated for night use.

3. Overalls shall be supplied by the subcontractor to the workmen and adequate facilities shall be provided to enable the painters and other workers to wash during the cessation of work.

8.4.4 PROVISION OF REST SHELTER FOR WOKERS

Proper Sheds & Shelters big enough to accommodate all possible workers shall be provided for workers to rest during break. Taking rest at height, in activity area and other hazardous locations shall not be allowed.

The drawing of such sheds shall be submitted to BHEL for approval before construction.

8.4.5 MEDICAL FACILITIES

Refer Section B for applicability of requirements pertaining to Clause 8.4.5.1

8.4.5.1 MEDICAL CUM FIRST-AID CENTER

- a) A medical center shall be setup at site with basic facilities for handling medical emergencies. The medical center shall be developed independently by BHEL/an agency as specified in the contract and run jointly by all agencies on proportionate sharing basis as stipulated in the contract.
- b) A qualified medical professional, not less than MBBS, shall be deployed at medical center as stipulated in the contract.(Part-time or full time as decided at the site).
- c) There shall be a full-time trained first aider and a nurse. Depending upon the working hours at the site, First-aider shall be deployed accordingly.
- d) The center shall have all articles as per Schedule IV of BOCW(Central) Rules'1998. In addition,, one Stokes basket stretcher shall be available.
- e) An ambulance shall be deployed for every 1000 persons along with trained driver and accessories as per schedule V of Central BOCW Rules'1998. Depending upon the working hours at the site, First-aider shall be deployed accordingly.
- f) The center shall be adequately equipped for Resuscitation, Immobilisation, Dressing, dealing with poisoning cases including snake and insect-bites and sufficient stock of emergency medicines as prescribed by the qualified medical professional as per point (b)

8.4.5.2 IMPORTANT

- g) If there is no specific mention of responsibility of deployment or setting up of any of the above facilities and operating expenses thereof, BHEL site management shall have the liberty to give this responsibility to any of the contractors on cost sharing basis.
- h) Medical waste shall be disposed as per prevailing legislation (Bio-Medical Waste –Management and Handling Rules, 1998)
- i) Every injury shall be treated, recorded and reported.
- j) All First Aid injuries shall be recorded as per Format No. HSEP:14-F17
- k) List of qualified first aiders and their contact numbers to be displayed at conspicuous places.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 33 of 162

8.4.5.3 FIRST AID

A. In addition to 8.4.5.1 &2, The subcontractor with Boiler&ESP, TG, Civil shall:

1. Provide necessary first aid facilities for every work place.
2. Ensure availability of qualified First-aider throughout the working hours.
3. Every injury shall be treated, recorded and reported.
4. Refresher course on first aid shall be conducted as necessary.
5. List of qualified first aiders and their contact numbers to be displayed at conspicuous places.
6. All First Aid injuries shall be recorded as per Format No. HSEP:14-F17

B. FIRST AID BOX

1. The first aid box shall be maintained by first aider who shall always be readily available during the working hours of the work place.
2. **Details of First Aid Box:**
 - a) Details of contents of first aid box is given in **Annexure 03**. A slip of contents shall be pasted on the First Aid Box with following details:

Name, Quantity, Expiry Date, Checked by...
 - b) First Aider's name and contact no to be displayed on the box.
 - c) The first aid box shall be distinctly marked with a Green Cross on white background.
 - d) The box shall be properly secured with lock & key to avoid misuse
7. The first aid boxes should be placed at various locations so as to make them available within easy reach of hazardous activities and at the quickest possible time.
8. The subcontractor shall ensure that the Supervisors and Engineers are adequately trained for attending to any emergency.
9. Monthly inspection of First Aid Box to be conducted by the subcontractor as per Format no. HSEP:14-F01

8.4.5.4 HEALTH CHECK UP

The persons engaged at the site shall undergo health checkup as per the **Format no. HSEP:14-F02** before induction. The persons engaged in the following works shall additionally undergo regular health checkup using same Format at least once in a year:

Height workers	Drivers/crane operators/riggers	Confined space workers
Shot/sand blaster	Welding and NDE personnel	Any person referred by BHEL

8.4.5.4.1 HEIGHT PHOBIA TEST

1. The persons engaged in working at heights (above 2 meters) to be assessed for Height Phobia and associated conditions.
2. Such workers are to be allowed only on successful completion of this test, otherwise they shall be allocated ground based jobs. IDs / Height passes shall be issued to such workers.

8.4.6 PROVISION OF CANTEEN FACILITY



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 34 of 162

Minimum or better facilities to be ensured as per BOCW (Rule 244) / Factories Act, specially taking care of the following:

1. Canteen facilities shall be provided for the workmen of the subcontractor inside the project site.
2. Proper cleaning and hygienic condition shall be maintained.
3. Proper care should be taken to prevent biological contamination.
4. Adequate drinking water should be available at canteen.
5. Fire extinguisher shall be provided inside canteen.
6. Regular health check-up and medication to the canteen workers shall be ensured.
7. Canteen waste to be disposed of in compliance with law
8. Domestic LPG cylinder shall not be used
9. Canteen should be periodically inspected using standard checklist finalized along with BHEL

8.4.7 PROVISION OF ACCOMMODATION / LABOR COLONY

1. The subcontractor shall provide to every workman (within fifteen days of the commencement of the employment of migrant workmen):
 - a) In case he is accompanied by any other member of his family, a suitable barrack so as to accommodate one room having at least a floor area of 10 square meters, a verandah and adequate additional covered space for cooking food as well as one common sanitary latrine, one common bathroom for every three such quarters; and
 - b) In case he is unaccompanied by any other member of his family, a suitable barrack so as to accommodate not more than ten such migrant workmen, having at least a floor area of not less than 6.5 square meters for each such migrant workman making use of the barrack, a verandah and adequate additional covered space for cooking food as well as one common sanitary latrine and one common bathroom for every ten such migrant workmen
2. Every quarter and the barrack shall be so constructed as to afford adequate ventilation, protection against heat, wind, rain and shall have smooth, hard and impervious floor surface.
3. The quarters or the barracks, as the case may be, shall be at a convenient distance from the establishment and shall have adequate supply of wholesome drinking water.
4. The area in which the quarters and/or barracks are located as well as the latrines and bathrooms provided therein shall be kept in a clean and sanitary condition at all times.
5. Regular housekeeping of the labor colony shall be ensured.
6. Availability of Bathing/ washing bay to be ensured

7. Room ventilation and safe electrification to be ensured
8. MSDS of LPG shall be put up prominently and shall be included in the induction training also.
9. The labor colony shall be secure so that only authorized persons have access to it.
10. Availability of local market to be ensured by the Sub-contractor
11. A "Suggestion Register" shall be made available at the labor colony for workers. The feedback shall be reviewed on weekly basis and acted upon.
12. Labor colony shall be inspected fortnightly by Subcontractor Safety Officer & HR executive, and report submitted to BHEL as per Format No. HSEP:4-F16
13. **Facility of Crèches** – to be provided wherein more than fifty female workers are deployed
14. Provisions of Clause 8.4.1, 8.4.2 and 8.4.3 shall be applicable on labor colony as well

8.4.8 PROVISION OF EMERGENCY VEHICLE

Dedicated emergency vehicle shall be made available at workplace by subcontractor for evacuation of victim from site.

However, Ambulance shall be used exclusively for transporting victim to hospital

8.4.9 PEST CONTROL

Regular pest control should be carried out at all offices, mainly laboratories, canteen, labor colony and stores by the subcontractor.

8.4.10 SCRAPYARD

1. Scrapyard shall be developed by subcontractor to store metal scrap, wooden scrap, waste, hazardous waste.
2. Scrap/Waste shall be segregated as Bio-degradable and non-bio-degradable and stored separately.

8.4.11 ILLUMINATION

1. The subcontractor shall provide adequate lighting facilities e.g. flood lighting, hand lamps, area lights etc. to ensure adequate lighting at all work places & their approaches including passage ways as per IS: 3646 (Part-II) at all times. Indicative recommended values are given below:

S. No.	Location	Lux Level
A.	Construction Site	
1	Outdoor areas like store yards, entrance and exit roads	20
2	Platforms	50
3	Entrances, corridors and stairs	100
4	General illumination of work area	150
5	Rough work like fabrication, assembly of major items	150



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 36 of 162

6	Medium work like assembly of small machined parts	300
7	Fine work like precision assembly, precision measurements etc.	700
8	Sheet metal works	200
9	Electrical and instrument labs	450
B.	Office	
1	Outdoor area like entrance and exit roads	20
2	Entrance halls	150
3	Corridors and lift cars	70
4	Lift landing	150
5	Stairs	100
6	Office rooms, conference rooms, library reading tables	300
7	Drawing table	450
8	Manual telephone exchange	200

In case any area is not mentioned above, the applicable illumination for the same shall be specified by BHEL based on applicable standards and international norms

1. Level of illumination shall be checked periodically using a calibrated lux meter and recorded for each work area on minimum weekly basis as per Format No. HSEP:14-F21
2. Lamp (hand held) shall not be powered by mains supply but either by 24V or dry cells.
3. Lamps shall be protected by suitable guards where necessary to prevent danger, in case of breakage of lamp.
4. Emergency lighting provision for night work shall be made to minimize danger in case of main supply failure.

9. HSE TRAINING & AWARENESS

9.1 HSE INDUCTION TRAINING

1. All persons entering into project site shall be given HSE induction training before being assigned to work, which shall be imparted through audio-visual medium and shall be of minimum 2-hour duration.
2. Any single trainee batch size should not exceed 40.
3. Proper safety wear & gear must be issued to all the workers being registered for the induction (i.e., Shoes/Helmets/Goggles/Leg guard/Apron etc.)
 - i. They must arrive fully dressed in safety wear & gear to attend the induction.
 - ii. Any one failing to conform to this safety wear& gear requirement shall not qualify to attend.
4. In-house induction training subjects shall include but not limited to:



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 37 of 162

- i. Briefing of the Project details and importance of employee for the project and for the nation.
 - ii. Safety related cardinal rules, objectives and targets.
 - iii. Site HSE rules.
 - iv. Site HSE hazards and aspects.
 - v. First aid facility.
 - vi. Emergency Contact No. and procedures
 - vii. Details of Fire prevention and emergency response systems & procedures at site.
 - viii. Requirement of incident / near miss reporting by all.
 - ix. Accident case studies
 - x. Rules to be followed in the labor colony (if applicable)
5. Evaluation to be carried out after training and induction training to be repeated in case of failure of participant in evaluation
6. On completing subcontractor's in-house HSE induction, each employee shall sign an induction training form (format no. HSEP: 14-F03) to declare that he had understood the content and shall abide to follow and comply with safe work practices. They may only then be qualified to be issued with a personal I.D. card, for access to the work site (provided Health Checkup is over).

9.2 HSE TOOLBOX TALK

1. HSE Tool Box talk shall be conducted by frontline foreman/supervisor of subcontractor to specific work groups daily prior to the start of work. The agenda shall consist of the following:
 - i. Visual checkup of workers regarding health, any signs of fatigue, intoxication etc.
 - ii. Details of the job being intended for immediate execution.
 - iii. The relevant hazards and risks involved in executing the job and their control measures.
 - iv. Specific site condition to be considered while executing the job like high temperature, humidity, unfavorable weather etc.
 - v. Recent non-compliances observed.
 - vi. Appreciation of good work and warning for any unsafe acts done by any person.
 - vii. Any doubt clearing session at the end
2. Record of Tool box talk shall be maintained as per Format no. HSEP:14-F04

9.3 TRAINING ON HEIGHT WORK

Due to the large percentage of fall from height in incidents, training of minimum 2-hour duration on height work shall be imparted to all height workers by in- house / external faculty for every batch of new inductees. The training shall include following topics:

1. Inspection of work area, access and egress w.r.t height hazards
2. Use of PPEs; use of fall arrester, retractable fall arrester, life line, safety nets etc.
3. Safe climbing through monkey ladders.
4. Inspection of PPEs.
5. Medical fitness requirements.
6. Mock drill on rescue at height.
7. Dos & Don'ts during height work.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 38 of 162

8. Accident case studies

In case, above is organized by BHEL, proportionate cost shall be borne by subcontractors

9.4 HSE TRAINING DURING PROJECT EXECUTION

1. HSE training shall be arranged by subcontractor as per the need of the project execution and recommendation of BHEL.
2. The topics of the HSE training shall be as follows but not limited to:
 - i. Hazards identification and risk analysis & Identification of Environmental Aspects / Impacts
 - ii. Work Permit System
 - iii. Learning from past incidents
 - iv. First aid, Firefighting & Fire-warden training
 - v. EMS and OHSMS
 - vi. T & Ps fitness and operation
 - vii. Electrical & Chemical safety
 - viii. Welding, NDE & Radiological safety
 - ix. Material handling.
3. Safety awareness and on-the-job training programmes shall be carried out at site for all workers periodically. Periodicity to be decided by BHEL but shall be minimum once in six months
4. Penalty Training – In case of any incident, the involved person, group or agency shall undergo a penalty HSE training for a minimum period of 2 hrs or as decided by BHEL.
5. In case it is not possible to provide training to all workers at once, same shall be imparted in Batch-wise manner so as to cover all workers with specified periodicity.
6. An up-to-date record to be maintained with attendance of participants and trainers preferably in soft copy as per Format No. HSEP:14-F03.
7. Every employee of agency should be provided at least 2 hr. safety training in every month.

In case, above is organized by BHEL, proportionate cost shall be borne by subcontractors

10. HSE PROMOTION: SIGNAGE, POSTERS, COMPETITION, AWARDS ETC

10.1 DISPLAY OF HSE POSTERS AND BANNERS

Site shall arrange appropriate posters, banners, slogans in local/Hindi/English languages at work place.

10.2 DISPLAY OF HSE SIGNAGE

Appropriate HSE signage shall be displayed at the work area to enhance awareness of HSE workmen and passersby about the work going on and do's and don'ts to be followed.

10.3 COMPETITIONS ON HSE, AWARDS & REWARDS



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 39 of 162

1. Subcontractor shall arrange competitions (slogan, poster, essay etc.) on HSE for workers and employees from time to time (Safety day, World Environment Day etc. minimum one such function each month) and winners will be suitably awarded during the functions.
2. Subcontractor shall identify workers following good HSE practices and reward them from time to time as encouragement to follow good HSE practices.
3. Alternatively, if a common monthly function is organized at site, subcontractor shall participate in the same so that a minimum frequency of one such function per month is maintained.

10.4 HSE AWARENESS PROGRAMMES

Subcontractor shall arrange HSE awareness programmes periodically on different topics including medical awareness for all personnel working at site from time to time including officials involved in execution.

11. HSE COMMUNICATION AND PARTICIPATION

11.1 MONTHLY HSE REPORTING

1. HSE activities shall be reported to BHEL monthly as per Format no. HSEP: 14-F05. The reporting medium can be hard/soft as per BHEL requirement.
2. The period of reporting shall be 25th of the preceding month to 24th of the present month and report shall be submitted by the end of the calendar month or as conveyed by BHEL.
3. BHEL can modify the reporting requirements as per requirement

11.2 HSE EVENT REPORTING

1. Important HSE events like HSE Training, Mock / Fire/Rescue Drills, Medical camp etc. organized by subcontractor shall be reported to BHEL in detail with photographs
2. Celebration of important days like National Safety Day, World Environment Day etc. shall also be reported likewise.

11.3 HSE INCIDENT REPORTING

All incidents (near misses, property damage, first-aid cases, minor, major and fatal incidents) shall be reported to BHEL as they happen through SMS and Hard/Soft copy as per Format No. HSEP: 14-F22

11.4 HSE SUGGESTIONS

All workers and employees to be encouraged to provide suggestions for improvement in



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 40 of 162

Health, Safety & Environment at site. The suggestions to be recorded in a "Suggestions Register". Suggestions to be reviewed and those having potential of significant beneficial effects are to be implemented, and recognition / award to be given to the individual.

11.5 CLIENT COMMUNICATON

All HSE related communication from BHEL, customer / external statutory and regulatory agencies to be handled on priority. The relevant issues to be resolved in expeditious manner

11.6 RECORDS OF COMMUNICATON

Records of all communication and their responses as detailed above shall be maintained by subcontractor in hard / soft copy and produced when required.

12. INCIDENT REPORTING, INVESTIGATION & CORRECTIVE ACTION

1. A conducive environment for reporting of near misses and other incidents shall be developed at site through system of rewards etc.
2. Priority to be given to ensure medical treatment of the victim. Victim to be given immediate First Aid and transported to Medical Facility in a well-equipped Ambulance
3. All incidents, as they happen, shall be reported to BHEL immediately over phone/SMS/Whatsapp/mail and then in Format No. HSEP:14-F22 within 24 hrs. of occurrence. Immediate SMS shall be sent to concerned Package In-charge with following Details:

- a. Project & Customer Name:
- b. Subcontractor Name & Scope:
- c. Incident Area:
- d. Number of Injured / Fatalities:
- e. Date & Time of Accident:
- f. Incident Description in few lines:

No incident shall be hidden

4. Records of all incidents shall be maintained in hard / soft copy as per Format No. HSEP:14-F23.
5. For all incidents:
 - a. The incident area, equipment / tools involved, documents & records etc. shall be maintained as-it-is pending investigation
 - b. Root Cause Analysis (RCA) to be conducted and corresponding Corrective / Preventive Action (CAPA) ensured
 - c. Responsibility shall be assigned and action to be taken against the erring individual
 - d. In case presence of manufacturer of the equipment involved is required, subcontractor will arrange the same



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 41 of 162

e. All expenses pertaining to the RCA / CAPA shall be borne by the subcontractor

6. RCA and CAPA reports of all near misses and minor injuries shall be identified and report submitted to BHEL within 7 days of occurrence.
7. For incidents, where worker does not resume duty within 48 hours of occurrence, Joint investigation along with BHEL shall be conducted within 7 days, and CAPA ensured.
8. Corrective action shall be immediately implemented at the work place. Work shall be put on hold in the area till corrective actions are verified by BHEL
9. All incidents, their Root Cause Analyses and Corrective actions shall be recorded, and analyzed so as to identify weak areas and actions to be taken to reduce the incident trend.

13. SAFETY DURING WORK EXECUTION

13.1 HSE SYSTEMS AND PROCEDURES

BHEL Power Sector HSE Management System (HSEMS) shall be referred for controlling hazards, aspects, and carrying out HSE activities at site. Subcontractor shall get familiar with and follow the HSEMS documents provided by BHEL which include the follows:

13.1.1 HSE PROCEDURES:

All HSE Procedures defined in HSEMS, as referred in various sub-clauses of this Section as given in Annexure 01

13.1.2 PERMIT TO WORK (PTW) SYSTEM

1. The following activities shall be carried out by the subcontractor strictly after obtaining Permit to Work (PTW) from BHEL
 - i. General Work Permit (**Format No. HSEP14-FP01**)
 - ii. Height working (**Format No. HSEP14-FP02**)
 - iii. Hot working (**Format No. HSEP14-FP03**)
 - iv. Confined space Work (**Format No. HSEP14-FP04**)
 - v. Excavation more than 2-meter depth (**Format No. HSEP14-FP05**)
 - vi. Radiography / Radiation Work (**Format No. HSEP14-FP06**)
 - vii. Heavy / Complex / Critical Lifting Activity (**Format No. HSEP14-FP07**)
 - viii. Night / Holiday Work (**Format No. HSEP14-FP08**)
 - ix. Material Loading / Unloading Permit (**Format No. HSEP14-FP09**)
 - x. Grating / Safety Net / Safety Facility Removal Permit (**Format No. HSEP14-FP10**)
 - xi. Live Electrical Maintenance etc. - Lockout / Tag (**Format No. HSEP14-FP07**)

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

2. The above list is not exhaustive. BHEL reserves right to introduce additional Permits or modify requirements for usage of existing Permits. The conditions for using the Permit are specified in the Format (General Requirements).
3. Where customer is having separate Work Permit System the same shall be followed in conjunction to ensure all activities and checks are covered in all systems.
4. Permit applicant shall apply for work permit of particular work activity at particular location before starting of the work along with Job Hazard Analysis.
5. All Permit signatories shall physically visit the work area and check that all the safety control measures necessary for the activity are in place. Only then the permit shall be issued.
 - a. Signatory shall physically visit the area of work and ensure all required safeguards before signing the Permit
 - b. Signatory shall periodically visit the area to confirm the availability of required safeguards throughout the currency of the permit
 - c. In case any Permit requirement is not available, work will be stopped till it is made available
6. Permit holder shall implement and maintain all control measures during the period of permit. The permit will be closed after completion of the work and submitted to BHEL.

13.1.3 Operational Control Procedures

1. All applicable OCPs (Operational Control Procedures) as identified from outcomes of HIRA, Aspect / Impact studies and BHEL inputs will be followed by subcontractor. This will be done as part of normal scope of work.
2. Illustrative list of such OCPs is given in Table 13.1 and same will be made available to subcontractor by BHEL during work execution at site.
3. In case any other OCPs are required or existing ones need to be modified in order to control the risks / impacts associated with any activity during the execution of work subcontractor shall prepare / update and follow the same with information to BHEL.

Table 13.1 - LIST of Reference OCPs

No.	Topic	No.	Topic	No.	Topic
0	General Safety	20	Oil flushing	40	Gas distribution test
1	Handling of chemicals	21	Alkali boil out	41	Cleaning of Hotwell / Deaerator
2	Electrical safety	22	Steam blowing	42	Electrical maintenance
3	Energy conservation	23	Working in confined area	43	O&M of control of AC plant & system
4	Welding and gas cutting operation	24	Operation of passenger lift, material hoists & cages	44	Material preservation
5	Fire safety	25	Vehicle/ Crane maintenance	45	Electro-resistance heating
6	Use of hand tools	26	Radiography	46	Blasting
7	First aid	27	Waste disposal	47	Transformer charging



HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-ER
Rev.: 00
Date:25.04.19
Page 43 of 162

8	Food safety at canteen	28	Handling & storage of mineral wool	48	Handling of battery system
9	Use of cranes	29	Working at night	49	DG set
10	Storage and handling of gas cylinders	30	Computer operation	50	Sanitary maintenance
11	Manual arc welding	31	Storage in open yard	51	Piling rig operation
12	Use of helmets	32	Drilling, reaming and grinding(machining)	52	Passivation
13	Good house keeping	33	Stress relieving	53	EDTA Cleaning
14	Safe excavation	34	Hydraulic test	54	Chemical cleaning of Pre boiler system
15	Working at height	35	Trial run of rotary equipment	55	Boiler Light up
16	Filling of hydrogen in cylinder	36	Batching	56	Rolling and Synchronization
17	Illumination	37	Cable laying/tray work	57	Loading of Unit
18	Handling and erection of heavy metals	38	Spray insulation	58	Air compressor
19	Acid cleaning	39	Compressor operation	59	Hydra Operation

13.2 ACTIVITY SPECIFIC REQUIREMENTS FOR SAFETY:

All Work shall be commenced only after taking the respective Work Permits (as applicable) and precautions as per relevant codes, systems and OCPs in order to ensure safe conditions throughout the duration of work. Additionally, activity specific safeguards as per this section shall be followed.

13.2.1 WORK AT HEIGHT:

1. All work at height above 2 meter above ground level without complete platforms, handrails and other related fall protection shall require a work permit in the prescribed form. This shall require approval by the competent authority. The HSE officer of sub-contractors shall follow the checklist religiously by physically verifying the condition of the work area before recommending for approval.
2. Prior to the start of work at elevation, the HSE Officer involved with the work must meet the work supervisor to review the scope of work, and must review all the possible fall hazards and effective safety responses. The evaluation / analysis must be documented and kept on file and on site by the HSE Officer.
3. Whenever a fall hazard or other exposure exists for working at heights more than 2.0m/6ft, the nature and scope of work will be evaluated for conditions and environmental factors before selecting the appropriate fall protection system (active, passive or a combination of measures, as appropriate).



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 44 of 162

4. All Engineering and Administrative Controls including barricading, safe platform, Safety Nets etc. shall be made available at work location. Under no circumstances, there shall be total reliance on PPEs only

5. Safety Nets

- a. Contractor shall maintain sufficient stock of Safety Nets for deployment
- b. Safety Nets as per IS: 11057:1984 should be used extensively for prevention / arrest men and materials falling from height.
- c. The safety nets shall be fire resistant, duly tested and shall be of ISI marked.
- d. Safety Nets shall be deployed below all platforms where height work is envisaged. Duration of work, delay shall be no excuses for non-installation of Safety Net
6. Reaching beyond barricaded area without lifeline support, moving with support of bracings, walking on beams without support, jumping from one level to another, throwing objects and taking shortcut must be discouraged.
7. Monkey Ladder shall be fitted with cages. Rope ladder should be discouraged.
8. In case of pipe-rack, persons should not walk on pipes and walk on platforms only.
9. In case of roof work, walking ladder/ platform should be provided along with lifeline and/ or fall arrestor.
10. For chimney or structure painting, both hanging platform and men should be anchored separately to a firm structure along with separate fall arrestor.
11. The procedures for the safety response to identified fall hazards developed and rescue plans must be reviewed with all individuals exposed to the hazards.
12. The HSE Officer must establish an inspection process of fall protection systems. Some equipment requires documented inspections by its manufacture on a regular schedule. Such equipment must have evidence of the inspection and re-certification process on it. This information must be reviewed before the equipment is actually used. Individuals must visually inspect the fall protection equipment before each use. Failure to complete this inspection process could result in serious injury or death.
13. Immediately remove from service any fall protection equipment that is identified as defective, damaged, or has been subjected to an impact. Damaged fall protective equipment must be destroyed to prevent re-use and not be discarded into trash containers, as the worn or damaged equipment could be unintentionally re-used.
14. Aerial lifting devices, excluding scissor lifts require the use of full body harnesses and lanyards in any elevated position.



HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 45 of 162

13.2.1.1 Personnel fall protection system must include:

a. Safety Harness

All height workers must use Safety harness with double lanyards. The primary lanyard is never unhooked until the secondary lanyard is secure. The design of the working platform should be such that **under no circumstances, worker should have both lanyards unhooked while at height.**

b. Lanyard

- i. The type of work and the environment conditions determine lanyard and lifeline selection. If welding, chemical cleaning that may damage lanyards, connectors or lifelines, sandblasting, etc., either protect the components or use more appropriate type of system.
- ii. Lanyards and lifelines must incorporate, or be used with, an appropriate deceleration (shock absorbing) device. Deceleration devices include rope grabs, rip-stitch lanyards, specially woven lanyards, tearing, or deforming lanyards, automatic self-retracting lifelines and lanyards which dissipate or limit the energy imposed on the employee during fall arrest.
- iii. Once in use, the system's effectiveness is to be monitored. In some cases, a program for cleaning and maintaining the system may be necessary. Lanyard and lifelines must use locking snap hooks only and under no circumstances must two lanyard snap hooks be connected.

c. Lifeline

All lifelines in general are to be made of min 8mm dia steel rope (plastic coated) and tied to columns with 3 clamps at each end. Wherever columns are not available to tie the lifelines, the vertical posts as per the design below are to be provided after carrying out drop load test initially. A load of 240kg to be dropped off the mid-point of lifeline in this test.

d. Lifeline Post

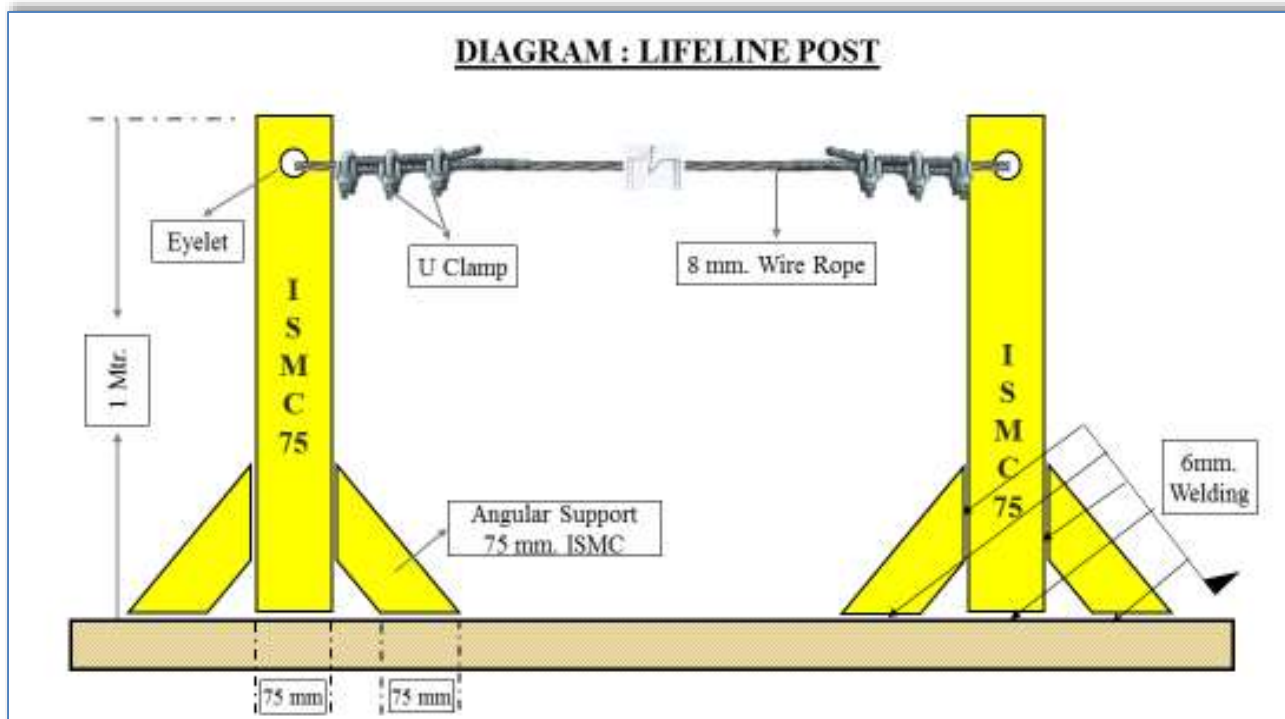


Fig. 13.2.1.1 Lifeline Post

- i. The support at vertical post shall be fixed at end-to-end. The maximum length of one end to another end shall be 18 meters
- ii. If the length of a lifeline is more than 18 meters, then intermediate vertical post(s) are to be used. Such intermediate post(s) will act as supports and the lifeline rope should simply pass through the eyelets (holes) of such supports without being anchored
- iii. The lifeline need not be wrapped / clamped to any intermediate post
- iv. Such intermediate posts must be used at an interval of every 18 meters
- v. The post(s) in which the original lifeline is to be installed should be capable of sustaining a tensile stress of 2268 Kgs
- vi. In a horizontal lifeline installation, maximum allowable sagging is 500-600 mm
- vii. For a single spun lifeline, no more than 2 persons are allowed to work; for more than two workers, another lifeline should be installed
- viii. Horizontal lifeline should be so installed that it does not impede safe movement of workers
- ix. All the installation work must be carried out by competent person with adequate knowledge

13.2.1.2 Working Platform

1. Working platforms, gangways and stairways shall be so constructed that they do not sag unduly or unequally and if the height of the platform gangways provided is more than 3.6 m above ground level or floor level, they shall be closely boarded and shall have adequate width, which shall not be less than 750 mm and be suitably fenced.

2. Precautions against the fall of Materials, Persons and Collapse of Structures



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 47 of 162

- i. Every opening in the floor or a building or in a working platform shall be suitably barricaded to prevent the fall of persons by providing suitable fencing or railing whose minimum height shall be 90 cm.
- ii. Adequate precautions should be taken such as the provision of fencing, or barriers to protect any person who might be injured by the fall of materials, or tools or equipment being raised or lowered. Cradle may be used for lifting materials - however this shall be made of MS angles and flats only and duly certified by the HSE officer. Operators may also use designed containers for lifting small tools.
- iii. Guardrails (including scaffolding) erected over/adjacent working areas must have the guardrails screened (opening < 0.5), to prevent material from falling outside the platform/decking.
- iv. Guardrails must be able to withstand a 200-pound force exerted in any one direction.
- v. Where necessary to prevent danger, guys, stays or supports should be used or other effective precautions should be taken to prevent the collapse of structures or parts of structures that are being erected, maintained, repaired, dismantled or demolished.
- vi. All openings through which workers are liable to fall should be kept effectively covered or fenced and indicated in the most appropriate manner.
- vii. Guardrails and toe-board/barricades and sound platform conforming to IS: 4912-1978 and other Indian laws and regulations as depicted below should be provided.

Guardrail system

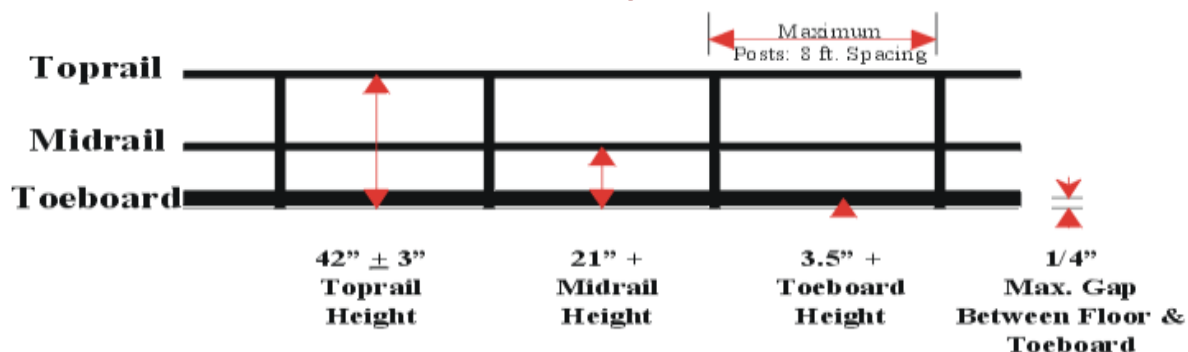


Fig. 13.2.1.2 Guard Rail System

- viii. Guardrails shall be provided to protect workers from falling from elevated work places. The rails are generally made of MS pipes of suitable dia. Rebar shall not be used for any handrails, ladder or cover purpose. Wherever the guard-rails and toe-boards cannot be provided:
 - a. adequate safety nets or safety sheets shall be erected and maintained; or
 - b. adequate safety harnesses shall be provided and used and / or
 - c. adequate fall arrestor shall be provided and used.

As mentioned under PPE clause, all these PPEs shall be defect free and regularly inspected for any defect. The full body safety harness shall have double lanyard only with max 1.8m length.

- ix. The monkey ladders shall have sufficient fall arrestors. Adequate lifelines of 8mm steel wire



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 48 of 162

rope shall be provided across the work area.

- x. The HSE officer shall recommend appropriate PPEs after analyzing hazards and risks involved.

13.2.1.3 Scaffolding

All scaffolds shall be conformant to the relevant standards including IS 3696 and IS 4014 as applicable. A sketch of the scaffolds proposed to be used shall be prepared and approval of the BHEL Engineer obtained prior to construction / use.

General

1. The scaffolding work must be carried out by a competent person, who shall train the scaffold users on safety aspects
2. All scaffolds shall be erected / dismantled by scaffolding crew under direct supervision of competent scaffolding supervisors.
3. All scaffolds shall be capable of supporting 4 times maximum intended load and erected on sound, rigid footing, capable of carrying the maximum intended load without settling or displacement. Bamboo scaffolding is not permitted for use on site.
4. Each employee on the scaffold shall use an approved safety harness attached to an independent lifeline. The lifeline is to be securely attached to substantial members of the structure (not the scaffold itself) or to securely rigged lines, which shall safely suspend a worker in event of a fall.
5. Guard rails and toe boards shall be installed on all open sides and ends of platforms more than (2) meters above ground or floor
6. Scaffold planks must be at least 5 cm x 25 cm (2" x 10") full thickness lumber scaffold grade or better.
7. Scaffold planks shall not span distances greater than 2.5 meters (8 feet).
8. Scaffold planks shall extend over end supports not less than 6 inches nor more than 12 inches and be secured to the scaffold. Scaffolding and accessories with defective parts shall be immediately repaired or replaced.
9. All scaffolding must be a minimum of two planks wide. No one may work from a single plank.
10. Scaffold planks must be inspected before use. Planks that have been damaged must be removed from the site.
11. Access ladders must be provided for each scaffold. Climbing the end frames is prohibited unless the design incorporates an approved ladder.
12. Adequate mudsills or other rigid footing capable of withstanding the maximum intended load must be provided.
13. Scaffolds more the 6 meters (20 feet) in height must be tied to the building or structure at intervals which do not exceed 4 meters (13 feet) vertically and 6 meters (20 feet) horizontally.
14. Do not overload scaffolds. Material should be brought up as needed. Scaffolding must not be loaded in excess of its rated capacity.
15. Barrels, boxes, kegs, blocks or similar unstable object must never be used as work platforms or to support scaffold.
16. Where persons must work under or pass under a scaffold then a 18 gauge wire mesh screen must be installed between the toe board and guard rail.
17. Employees exposed to overhead hazards while working on a scaffold will be protected by 5 cm (2") thick planks.
18. Wooden/bamboo ladders shall not be allowed at any cost. Ladder's rungs shall be fitted /welded properly. Before every use the rungs should be checked for safe use.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 49 of 162

19. Wooden scaffolds shall not be used in areas where fire / fire products are expected
20. Ropes made of jute / Plastic and other fire prone material shall not be used to tie up scaffolding components together
21. The platform should have permanent hand rail and mid rail with Toe board without fail.
22. All platforms are to be tightly planked for the full width of the scaffold, except as may be necessary for entrance openings. Platforms shall be secured in place.
23. On suspension scaffolds designed for a working load of 500 pounds, no more than two workers are permitted to work on the scaffold simultaneously. On suspension scaffolds with a working load of 750 pounds, no more than three workers are permitted on the scaffold simultaneously.

24. Requirements for different types of Scaffolds:

A. Suspended Scaffold

- i. Suspended scaffolds are platforms suspended by ropes, or other non-rigid means, from an overhead structure.
- ii. Requirements for use are to be preapproved by HSE Head, under a specific Permit to Work.

B. Rolling Scaffolds

- i. The height of rolling scaffolds shall not exceed three times the minimum base dimension.
- ii. The minimum base dimension of rolling scaffold will be 1.25 meters (4 feet).
- iii. Adequate help must be provided when moving a rolling scaffold.
- iv. Secure or remove all loose materials, equipment and tools before moving a rolling scaffold.
- v. No one is permitted to ride a rolling scaffold when it is being moved. Castor brakes must be locked-on when the scaffold is not being moved.


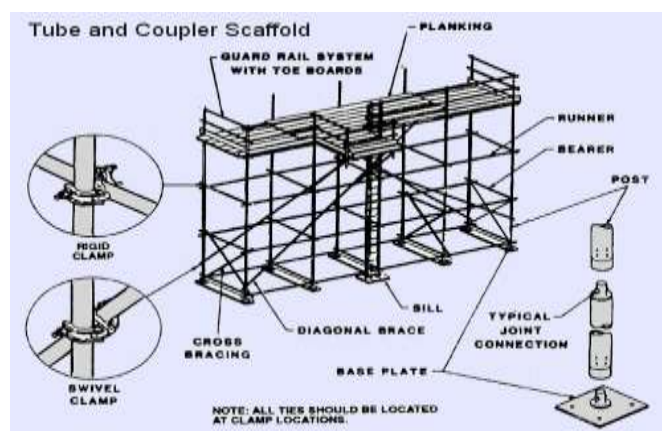


Fig. 13.2.1.3 Types of Scaffolds

25. Scaffold Tagging

Scaffolds being erected, modified or dismantled must be tagged as suitable for use. The scaffolds can only be accessed by those involved with the process.

GREEN scaffold tag- shall be fixed when scaffold is complete and safe for use, signed and dated by

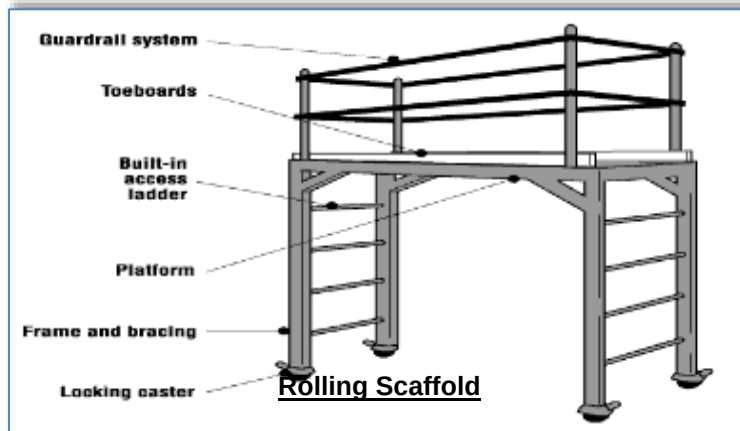

POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 50 of 162

the scaffolding competent person daily.

RED scaffold tag – to be fixed if scaffold is in some way defective and cannot be used or is still under erection.

Examples of scaffold tags:



Fig. 13.2.1.4 Scaffold Tagging

13.2.1.4 Ladder Safety

A sketch of the ladders proposed to be used shall be prepared and approval of the BHEL Engineer obtained prior to construction / use

Safe Use of Ladders:

1. Fall protection is required when working on a ladder above 2 meters and when climbing above nearby guardrails.
2. Ladders must be inspected prior to use and by a competent person quarterly, with documentation.
3. Use portable ladders for height up to 4 M only
4. Provide fixed ladders for height above 4 M
5. Place the ladder at an angle of 75 degrees (approx.) from the horizontal (1:4)
6. Extend ladder at least 1 M above the top landing
7. Secure top and bottom of the ladder firmly to prevent displacement- anti skid lining at the bottom
8. Ensure that the width of the ladder is not less than 300 mm and distance between rungs is not more than 300 mm
9. Provide landings of minimum size 600 x 600 mm at intervals not more than 6 M for fixed ladders. Check the ladders daily for any defects
10. Ensure that the areas around base and top of the ladder are clear. Getting on and off the ladder is more hazardous than using it. Use a mudsill if the ladder is to rest on soft, loose or rough soil
11. Do not use ladders of conducting material near power lines, and only use ladders near power line or other energize system with exposed parts if they are confirmed locked-out and de-

energized.

12. Stand no higher than the fourth rung from the top for carrying out any job standing on a ladder.
13. Never reach out from a ladder to perform work where your belt buckle protrudes past the ladder rung.
14. Always face the ladder while climbing up or down
15. Maintain three-point contact while climbing up or down a ladder i.e. two hands and one foot or two feet and one hand on the ladder at all the times.
16. Avoid climbing up or down a ladder while carrying anything in hands. Lift tools, equipment and materials with a rope.
17. Work from portable and extension ladders near guardrail where fall expose exists over the guardrail regardless of height, and above 2.0 mtr. heights from the working/walking surface will require the use of personal fall arrest equipment

13.2.2 EXCAVATION & CIVIL WORKS

All safety precautions shall be taken for foundation and other excavation marks as per IS-3764.

13.2.2.1 Excavation

The following safety measures are to be ensured before and during excavation:

1. All Excavation activities more than with depth of 1.22 meter or more shall require and Excavation Work Permit
2. Check for underground utilities like electrical / telephone cables, sewage, water lines and proper care has to be exercised to protect and prevent damage to it
3. Proper and adequate slope is maintained while excavating
4. Adequate shoring or sheeting is done wherever require to prevent soil sliding
5. Safe access through ladder or steps for exit & entry to excavation
6. No material /excavated soil is kept within one meter from the edge
7. Safe way is planned and provided for movement of HEM /transport equipment near excavation
8. Safety helmet and shoes/gum boots are provided and worn by the workmen at excavation works
9. Dewatering arrangement is made where water seepage is prevailed.
10. Stop blocks are provided to avoid vehicles reversing into the excavated trenches
11. Danger signs /Caution boards are displayed at work spot
12. Barricading is provided at excavated pits



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 52 of 162

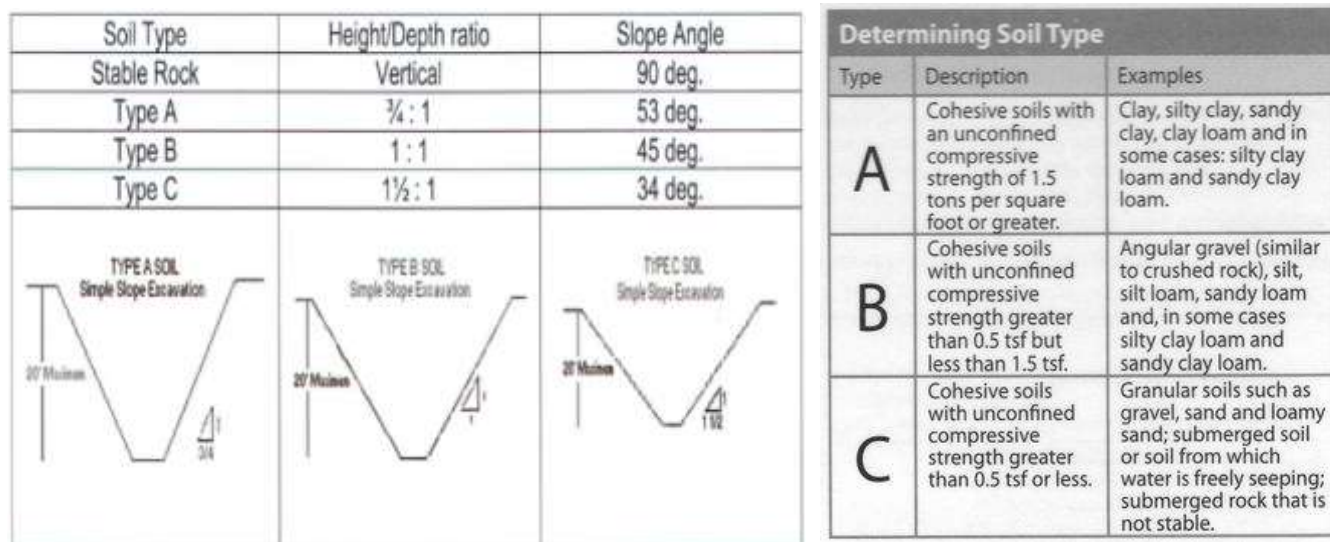


Fig. 13.2.2.1 Excavation Reference

13.2.2.2 Piling

Ensure the following precautionary measures before starting piling works:

1. Inspection of piling equipment by responsible person for its condition before initiating piling operation.
2. Checklist and OCP for piling to be prepared using manufacturer's instructions and used
3. Testing and its certification wire ropes, slings, D-shackles, chain pulley blocks using in the process of piling work by competent person
4. Adequate support and secured foundation of the piling equipment to avoid toppling
5. Hoses should be lashed and adequately secured
6. Proper work platform is to be provided on piling frame
7. Safe work procedures and close supervision to prevent unsafe acts of operators/any unsafe conditions that may arise
8. Only experienced and trained operators are engaged for the piling operation
9. Provision of Personal Protective Equipment (PPE) like safety shoes/gumshoes/safety helmet/safety belt etc. and its use by their workmen.
10. Special care and precautions If work is near electrical live cables/ electrical equipment
11. Cordoning of work area to prevent un authorized entry
12. Guarding of revolving parts
13. Specific measures to prevent over turning of pile driver/missing of hammer/ hammer movement out of range

13.2.2.3 Batching

Following Safety considerations for batching plant are to be ensured:

1. Modern type batching plant should be used in which all the moving parts are protected and



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 53 of 162

emergency and safety features are incorporated.

2. Installation of external Electric moto-vibrators in the feeding hopper of all batching plants to reduce human intervention.
3. Installation of safety devices like pull-chord on both the sides of conveyor for stopping the conveyor in emergency
4. Workers carrying cement / sand to be given appropriate PPEs like respiratory masks & gloves.
5. Conveyor belt/rotating parts must be guarded properly.
6. Safety awareness shall be inculcated in workmen about the risk involved in rotating parts.
7. The agency shall ensure to erect the batching plant as per drawing including installation of all safety devices as provided by manufacturer and witnessed by BHEL Engineer in charge before starting of machine in future.
8. Safety audit to also focus on Batching plant.
9. The site shall impose penalty on the agency who has violated the safety norms as per contract.

13.2.2.4 Mobile Plant

Mobile plant includes tractors, trailers, dumpers, excavators, bulldozers, road rollers etc. for earthmoving purpose and concrete mixers, concrete transit mixtures, concrete pumps etc for concreting purpose. Due to the very nature of their function and movement in difficult terrains, congested areas, working in tandem with manual work and other operations the danger is inherent. Reverse horn is compulsory for all earth moving machineries.

Following Safety measures to be ensured for Mobile Plant:

1. Where movement around site is involved, routes should be planned, obstruction free and well maintained
2. Observe specified speed limits
3. Operating personnel should be aware of associated risks and its preventive measures
4. Only experienced, trained and authorized persons with valid license (wherever applicable) should operate the mobile equipment/vehicles
5. Provide and use Warning lights and reverse horn for cautioning the people around
6. Operation should be on level and stable ground with adequate working clearance.
7. Loading of out riggers/stabilizers should be well within safe ground bearing capacity
8. No person should be on equipment or vehicle during loading and unloading of material
9. Operators should be protected by warning barriers or switching off power when working in close proximity of overhead power lines
10. The equipment /vehicles should be well maintained and provided with effective brake system and other safety devices (wherever require)
11. Rotating parts of equipment should be adequately guarded
12. Provide necessary personal protective appliances and ensure its use by the operating personnel. Ensure effective measures at source to control harmful emissions, dust, fumes contaminating atmosphere and cause health hazards to the operators and people in the vicinity.
13. No overloading/over stressing of vehicles/plant is allowed
14. Hoses, pipes, receivers, gauges and valves involved in carrying out hydraulic fluid/ compressed air should be checked for leaks and tested prior to operation.
15. Adequate safe clearance for swing and movement is to be judged during operation of Concrete mixer



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 54 of 162

16. Setting of machine on firm and level ground with wheel locked to prevent movement of machine
17. Proper instructions and Special precautions are to be ensured to prevent entry in to the danger zone of projectile of bucket while dropping bucket
18. Operator leaving work spot should ensure that the equipment/vehicle is kept in neutral position and place on firm and level ground.
19. The hand brake should be kept in position and block road wheels as additional safety measure
20. Blades/buckets should be kept low while moving
21. The dozer blades should not be used as brakes except in emergency
22. The ground should be examined for its bearing capacity and general safety especially when operating road roller at the edges of slopes, embankments.
23. The roller should not be moved downhill with the engine out of gear
24. If operating near excavations the following precautionary measures are to be ensured
25. Barricading, edge protection to prevent fall of persons/vehicles over running while reversing etc.
26. Suitable support system and adequate allowance to avoid the danger of side collapsing
27. Experienced signaler /attendant should be always accompanied with operator/driver for proper direction /signal and also to caution others in the working Zone during operation of mobile plant

13.2.2.5 Concrete Vibrators

1. Revolving parts/belt drives should be adequately guarded and Vibrating unit shall be completely enclosed and have suitable overload relays and effectively earthed
2. Ensure sufficient length of cable to the Vibrator.
3. Ensure electric starters and other accessories are firmly fixed adequately supported
4. Ensure locking of needle load while inserting needle in to the vibrator,
5. Ensure periodical lubrication and maintenance

13.2.2.6 Concrete Mixers

1. Setting of machine on firm and level ground with wheel locked to prevent movement of machine
2. Proper instructions and Special precautions are to be ensured to prevent entry in to the danger zone of projectile of bucket while dropping bucket

13.2.3 WELDING & GAS CUTTING SAFETY (HOT WORK)

1. All Hot Work shall require a Hot Work Permit
2. There shall be flash-back arrestors conforming to IS-11006 at both cylinder and burner ends. Damaged tube and regulators must be immediately replaced.
3. All safety precautions shall be taken for welding and cutting operations as per IS-818.
4. When possible, items to be welded, cut, heated, etc. shall be moved to a safe location free of combustible or flammable material. If this is not possible, then all combustibles/ flammables that can be removed from the area shall be removed within a 35-foot circumference and a positive means of confining arcs and sparks generated by the process shall be ensured and additional person(s) shall be stationed as fire-watch for the area(s) still exposed, along with obtaining the Hot Work Permit as applicable.
5. Appropriate fire-fighting equipment is to be available in close proximity of any welding and gas cutting operations at all times suitable for the type of Fire.
6. Drums, tanks, and similar containers that have contained flammable or toxic material shall not be welded, cut, or heated until they have been made safe by water filling, thorough cleansing or similar accepted practices. The container shall also be ventilated during the welding, cutting, or heating process.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 55 of 162

7. Proper ventilation is required for any welding or torch operations performed in a confined space.
8. Any welding or gas cutting operations performed on metals of toxic compounds or coating such as zinc, stainless steel, lead, cadmium, chromium, and beryllium shall be properly ventilated and/or proper respiratory protection shall be worn by any person that could be exposed to fumes, vapors, and gasses created by the welding and gas cutting processes.
9. Wherever it is practical, all arc welding operations shall be shielded to prevent direct light rays or sparks from contacting persons in the vicinity or from reaching areas normally used to travel through or into the vicinity. Where this is not practical, persons who shall be in the area are to use proper eye and skin protection. Other persons who are not participating in the welding or gas cutting operations are not to be allowed into the hazard zone.
10. Welders and other employees who are exposed to arc welding radiation shall wear suitable clothing and protective apparel to prevent burns and other types of ultraviolet radiation damage to the skin.
11. Arc welding machines shall be shut down when being moved or when they are not in continuous use. Electrode holders left unattended shall have electrodes removed and shall not be left where they might contact employees or conducting objects.
12. Arc welding power supply cable shall be of proper rating and material, e.g. copper.
13. Welders shall guard against allowing materials adjacent to or behind them to reflect radiation back toward them or towards others in the area. Reflected radiation can cause skin burns and eye flash burns.
14. Valve caps shall be in place when cylinders are not in use. Valve caps shall never be used for lifting the cylinder vertically.
15. Torches shall only be lit by approved strikers; never with matches, cigarette lighters, or hot-work.
16. **Splatter / Slag Collector**

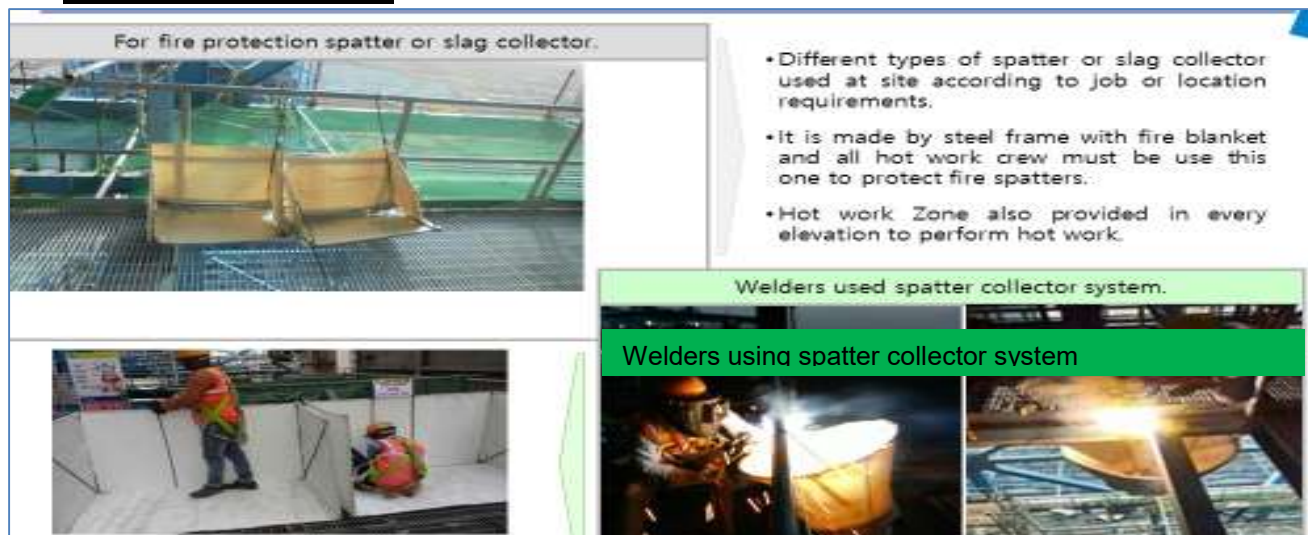


Fig. 13.2.3.1 Splatter / Slag Collector

While carrying out job at height, the sparks or molten slag shall be prevented from falling down by putting a fire-resistant (non-asbestos) sheet or patter/ slag collector or even MS Sheet. The passage of falling sparks or molten slag shall be barricaded till ground floor and any cable/ tubes/ any other objects interfering in the passages hall either be removed or covered with Fire-resistant sheet or MS Sheet.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 56 of 162

13.2.3.1 COMPRESSED GAS

1. All cylinder valves shall be closed when any work is finished and when any Cylinders are empty or being moved. Valve protection caps shall be placed and secured properly before gas cylinders are transported, moved or stored.
1. Compressed gas cylinders shall be secured in an upright position with chain or appropriate means during storage & use. However, a trolley shall be used for transportation.
2. Compressed gas cylinders shall always be secured from tipping or falling, whether in use, in storage or in transit. The cylinders shall always be secured upright, except during times when actually being hoisted or carried.
3. When cylinders are transported by powered vehicle they shall be secured in a vertical position.
4. Regulators shall be removed when cylinders are not in use or are in transit, unless the cylinder is firmly secured on a special carrier designed for this purpose.
5. Gas cylinders are not allowed to be used in man-basket when occupied.
6. Cylinders containing oxygen or fuel gasses shall not be taken into confined spaces.
7. Oxygen cylinders shall be stored a minimum of 6 meters from fuel gas cylinders or shall have an approved firewall between them.
2. All cylinders shall be kept at a safe distance from welding or cutting operations or shielded from arc/ sparks / slag.
3. All cylinders shall be placed where they cannot become part of the electrical circuit.
4. Oxygen and acetylene shall not be stored together. Oxygen must be separated from acetylene (or ANY fuel gas) or combustible material by at least 20ft or a barrier with a 30 minute fire resistance rating.
5. All Cylinders should be stored upright in a designated area with labels for the type of gas. All applicable precautions to be ensured during storage
6. Oxygen and fuel gas regulators, hoses and associated equipment shall not be altered and shall be in proper working order while in use.
7. Compressed air can be extremely dangerous if allowed to penetrate the skin. As such, the use of compressed air to clean off yourself or other workers shall be strictly prohibited.
8. All gas cylinders shall be stored in upright position. Suitable trolley shall be used for cylinder movement, the design of which shall be submitted to BHEL Engineer for approval.
9. No of cylinders shall not exceed the specified quantity as per OCP
10. Cylinders shall be moved by tilting and rolling them on their bottom edges. They shall not be intentionally dragged, struck or permitted to strike each other violently.
11. All cylinder should be kept only in cylinder trolley.
12. Cylinder shall be transported in upright vertical position by suitable mean.

13.2.4 LIFTING & RIGGING SAFETY

1. All Heavy / Complex Lifting operations as defined in Clause 6.12 shall require a Lifting Work Permit.
2. All the cranes and lifting tools & tackles shall be inspected on daily / weekly basis as well as



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 57 of 162

monthly by expert as per applicable formats.

3. In addition, inspection / certification as mandated by law shall be carried out wherein these shall be tested and certificates of fitness shall be obtained from 3rd party State Govt. approved competent agency before deploying at site and later periodically. BHEL shall be given advance intimation of any such inspections
4. The last date of Third Party Inspection and the next Due date shall be conspicuously displayed on all cranes. A copy of certificate shall be pasted on operator's cabin of all the lifting equipment.
5. Following requirements shall be mandatorily followed, wherever applicable:
 - a. The manufacturer's instruction for maintenance shall also be followed. All safety measures shall be followed.
 - b. All tools tackles, lifting appliances; material-handling equipment etc. used by the subcontractor shall be of safe design and construction.
 - c. The operators, slingers and signalers shall be qualified as per IS 13367 (part-1):2003 "Safe use of cranes- code of practices".
 - d. There shall be a person responsible for co-ordination among cranes where multiple cranes are used, and lifting over 75% of the crane capacity to be avoided.
 - e. Mobile phone should be banned for crane operator and lifting operation. Only walki talki shall be allowed in rigging/Lifting purpose.

13.2.4.1 Personnel Lifts (Man-Basket / Jhoola):

The design of personnel man basket shall be submitted to BHEL Engineer for approval before use. Relevant permit (Height work & others as applicable) shall be completed prior to lifting any people, along with a rigging plan.

- a. A separate Lifeline / Fall arrestor anchored to a fixed structure outside of Jhoola shall be provided for the workers inside the basket. All occupants of the basket shall have Safety Harnesses equipped with rope grabs, which are to be hooked to the vertical lifeline.
- b. Man-basket shall be used where access through ladders or scaffolding is not feasible.
- c. Man-baskets shall be designed and engineered by a manufacturer (job made man-baskets are not allowed, unless designed and tested by a certified engineer), and built robust with MS Angles and flats or plates or channels only.
- d. Guard rails top and mid, must be in place and screened-in to avoid material from falling out of basket. The factor of safety shall be 200%.
 - e. It shall have a door with double latches and shall open inside. Anchor points shall be identified within the man-basket.
- f. The man-basket shall be thoroughly inspected and load tested and a trial run performed without personnel before being put to job.
- g. It shall be treated as a lifting tool (T&P Item) and shall undergo same certification cycle and inspection as other lifting equipment.
- h. An additional sling of required lifting capacity shall be fixed the man-basket main lifting point and attached to the crane above the ball or block.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 58 of 162

- i. While lifting man-basket, the crane shall maintain a uniform speed of lift without any swing.
- j. Once man-basket reaches the destination, the lift brakes shall be locked as long as the basket remains at that point. The same care shall be taken in its descent.
- k. As for hanging man-basket, the same shall be hung off a rigid structure with help U-shaped handle welded to man-basket. This shall be tested once in a year by a competent person.
- l. Use of Rebar steel for making and monkey-ladder must be avoided.

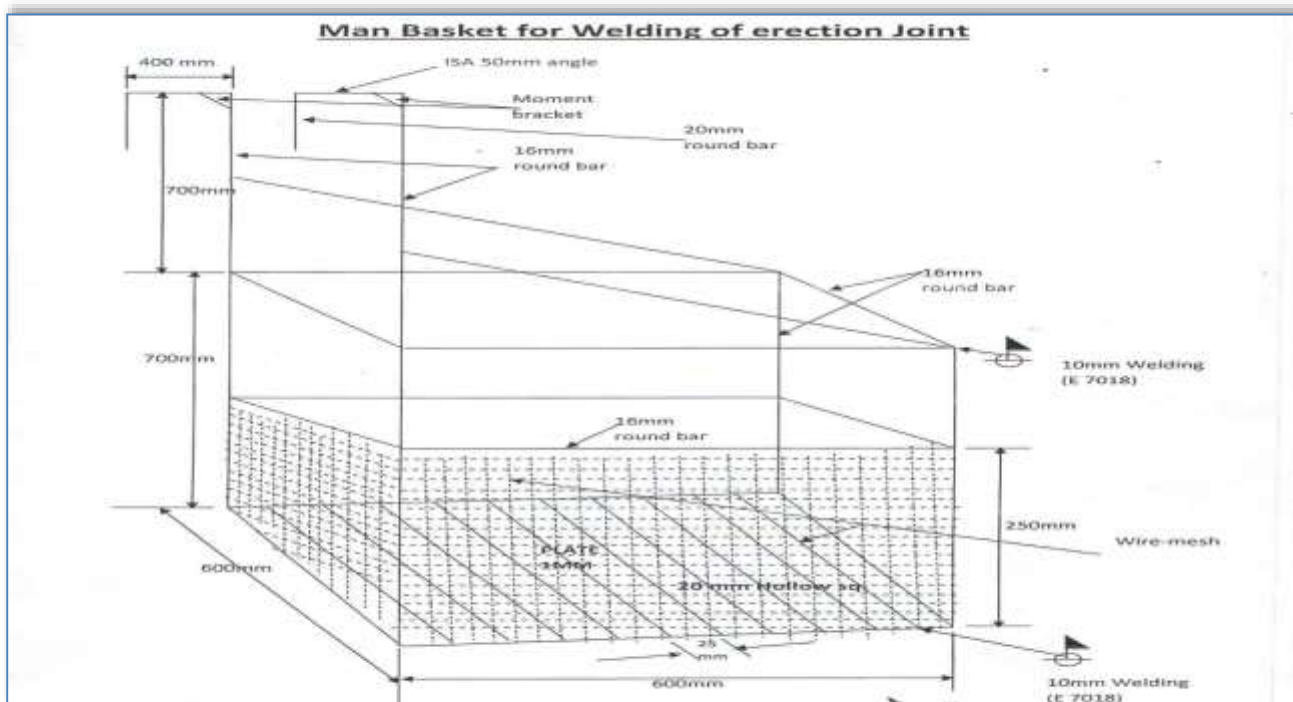


Fig. 13.2.4.1 Man Basket for Welding Erection Joint

13.2.4.2 Cranes & Hoisting Equipment:

This section provides the guidelines to ensure proper rigging and lifting activities are accomplished safely and in accordance with applicable specifications, codes, and regulations.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 59 of 162

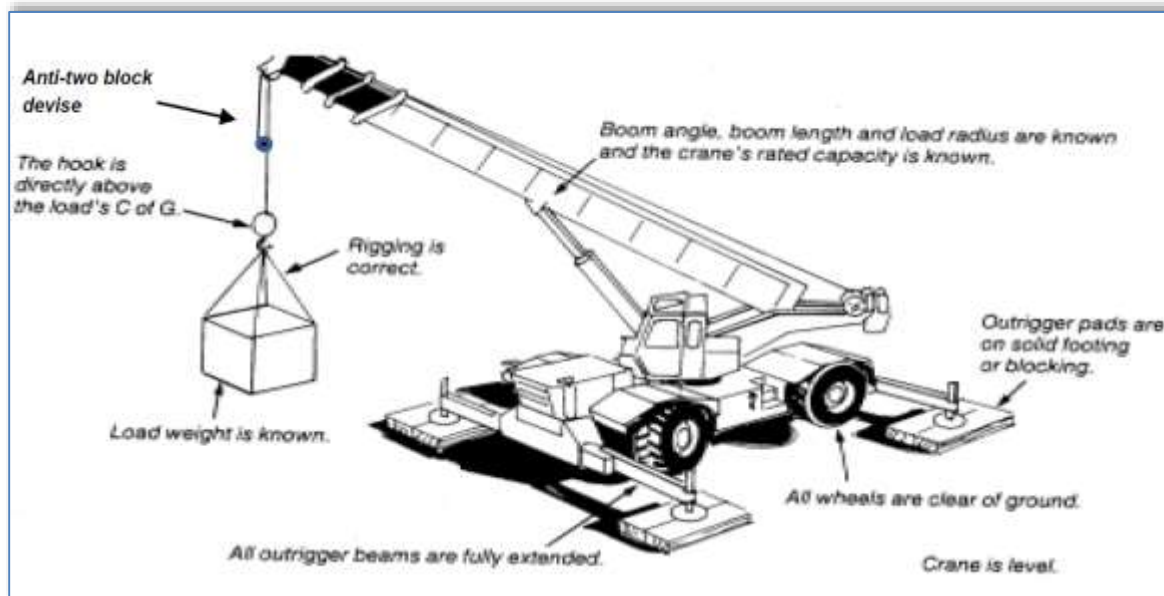


Fig. 13.2.4.2 Proper Crane Setup

- On every crane or piece of hoisting equipment notices of all rated load capacities, recommended operating speeds, and any hazard warnings or special instructions shall be conspicuously posted. All instructions and warning shall be visible from the equipment operator's station.
- Cranes shall have an Anti-Two-block safety device installed
- All mobile cranes shall have overload and backup alarms, load angle indicators and limit switches
- All areas within swing radius of cranes that are potentially accessible by pedestrian, vehicular, or equipment movement shall be barricaded to prevent anyone or any vehicle or equipment from being struck by the crane or hoisting equipment, or its load(s).
- No part of the lifting equipment or its load shall be within the distance as specified in the Indian Electricity Act from an energized power line
- Cranes shall have annual certified third party inspection and be inspected before use by the operator. Any defects shall be corrected before use. Logs of crane inspection shall be kept with the crane.
- Make certain that the rigging personnel, material, and equipment have the necessary capabilities for the job and are in safe condition.
- Communicate with person(s) directly responsible for accomplishing the work and / or work area to establish requirements/responsibilities and make certain that all preparatory work is complete.
- Mats/Pads must be used on all lifting equipment, equipped with outriggers.
- Pick and carry must have the load secured to the rig in front.
- Only BHEL Approved Plate Lifting Spreader Beam configuration shall be used (Sample in Fig. 13.2.4.2)



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date: 25.04.19

Page 60 of 162

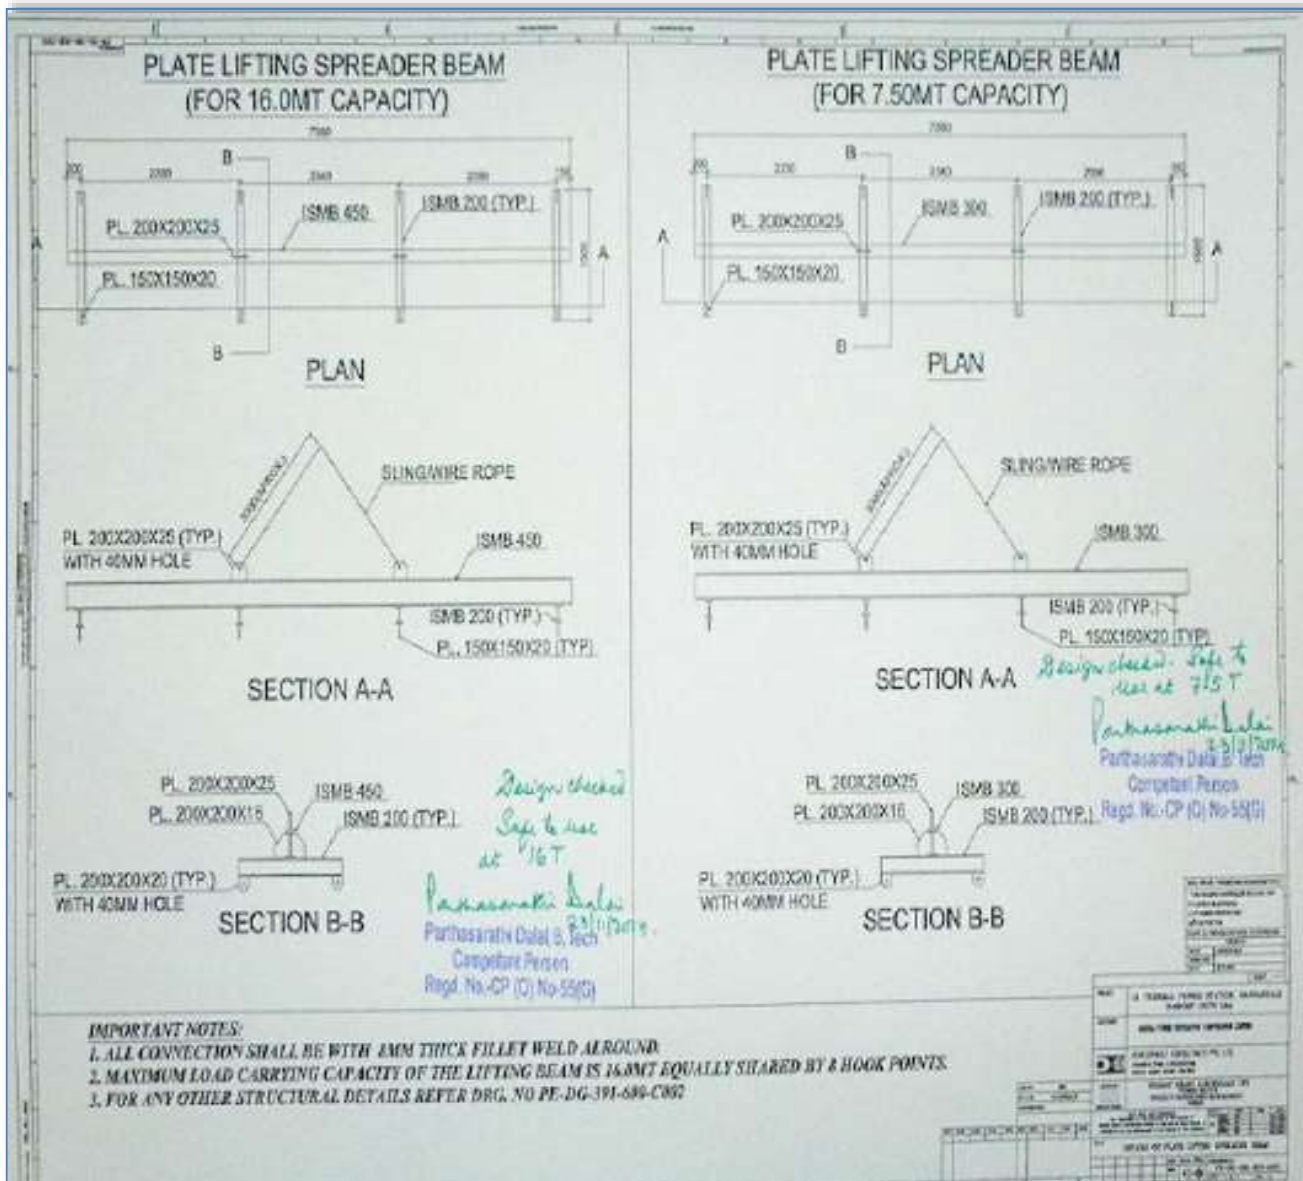


Fig. 13.2.4.3 Typical Plate Lifting Spreader Beam Configuration for 7.5 MT and 15 MT Loads

I. Crane operators must follow the following:

1. Pass an annual Operator's Physical examination
2. Carry a valid training certification card at all time while operating issued by the Govt. or other recognized institute.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 61 of 162

13.2.4.3 SAFE RIGGING PRACTICES

13.2.4.4

- a. Review the planned operation and requirements with the operator and rigging crew.
- b. Ensure a pre-lift meeting is conducted with crane operator, tagline operator, signal personnel, and Safety Manager.
- c. Designate a qualified person from the rigging crew to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means.
- d. Clear the lift area of all unnecessary personnel.
- e. Hydras shall only be allowed for loading & unloading works & shall not be allowed to move with load

13.2.4.4.1 RULES FOR SAFE RIGGING

1. Use loops, thimbles and corner pads to prevent damage to slings when used around corners or on cutting edges.
2. Never allow wire rope to lie on the ground for any length of time or on rusty steel or near solvents, chemicals or corrosive substances.
3. Slings must not be pulled from between or under loads with load resting on the sling.
4. Keep all rope away from flame cutting or welding operations.
5. Never use rope as sling material.
6. Never wrap a wire rope completely around a hook.
7. Do not bend wire rope near any attached fitting.
8. The sling must be selected to suit the most heavily loaded leg rather than the total weight when using multi-legged sling to lift loads in which one end is heavier than the other.
9. When using 3 and 4 legged sling configurations, any two legs must be capable of supporting the entire load.
10. Where possible, wire rope choker hitches must include a shackle with the eye around the shackle pin to prevent breaking wires of the choke. The choker hitch must be "snugged down" prior to lifting, not after tension is applied.
11. Unless authorized by the hook manufacturer when more than two rope eyes are placed over a hook, install a shackle, pin resting in the hook, and place the rope eyes in the bowl of the shackle.
12. Properly rig all loads to prevent dislodgment of any part.
13. Use guide ropes or tag lines to prevent the rotation or uncontrolled motion of the load when necessary.
14. Loads must be safely landed and properly blocked before being unhooked and unslung. Tag lines must not be used in situations that jeopardize the safety of the lift.
15. Lifting beams must be plainly marked with their weight and designed working load and must only be used in the manner for which they were designed.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 62 of 162

16. The hoist rope or chain must never be wrapped around the load. The load must be attached to the hook by slings or other rigging devices that are adequate for the load being lifted.
17. Multiple part lines must not be twisted around each other.
18. The hook must be brought over the center of gravity of load before the lift is started.
19. If there has been a slack rope condition, determine that the rope is properly seated on the drum and in the sheaves prior to lifting.
20. Keep hands away from pinch points as the slack is being taken up.
21. Leather gloves are recommended when handling wire rope.
22. Avoid impact loading caused by sudden jerking when lifting or lowering. Lift the load gradually until the slack is eliminated.
23. Never ride on a load that is suspended.
24. Avoid allowing the load to be carried over the heads of any personnel.
25. Never work under a suspended load until the load has been adequately supported from the floor and all conditions have been approved by the supervisor in charge of the operation.
26. Never leave a load suspended unless emergency evacuation is required.
27. Never make temporary repairs to sling.
28. The capacity of a sling is determined by its angle, construction, type of hitch and size.
29. Never lift loads with one leg of a multi-leg sling until the unused legs are made secure.
30. Never point load a hook unless it is especially designed and rated for such use.
31. Make certain that the load is broken free before lifting and that all legs are taking the load.
32. When using two or more slings on a load make certain all slings are made from the same materials.
33. Lower the loads on to adequate blocking to prevent damage to the slings.
34. Materials and equipment being hoisted must be loaded and secured to prevent any movement which could create a hazard in transit.
35. The weight of the hook, load block and any material handling devices must be included when determining crane capacity.
36. Calculated weights cannot exceed 75% of the chart without written approval.
37. Personnel must be completely clear of loads being picked up or set down by crane. Tag lines will be used to control the loads. Loads must not be touched by hand while placing/ moving.

13.2.4.4.2 SLINGS

a. Synthetic Slings

The following are rules for safe use of synthetic slings:

- i. Synthetic slings must be marked to show the rated capacity for each type of hitch and type of web material.
- ii. Nylon web slings must not be used where fumes, vapors, sprays or mists or liquids of acids or phenolic are present. Web slings with aluminum fittings must apply in this category.
- iii. **Synthetic web slings must be removed from service and destroyed if any of the following conditions are present:**



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 63 of 162

- a. Acid or caustic burns
- b. Melting or charring of any part of the sling surface
- c. Snags, punctures, tears or cuts
- d. Broken stitches
- e. Distortion of fittings
- f. Synthetic web slings of polyester or nylon must not be used at or come in contact with temperatures in excess of 82°C
- g. Polypropylene web slings must not be used at or come in contact with temperatures in excess of 93°C
- h. Insulated hooks must be tested yearly to insure insulation integrity to at least manufacturer's specifications.

iv. Wire Rope Slings must be removed from service and destroyed if any of the following conditions are present:

- a. In (10) randomly distributed wires broken in one (1) rope lay, or five (5) broken wires in one (1) strand in one (1) rope lay.
- b. Wear or scraping of one-third the original diameter of outside wires.
- c. Kinking, crushing, bird caging or any other damage resulting in distortion of the wire rope structure such as:
- d. Evidence of heat damage.
- e. End attachments that are cracked, deformed worn.
- f. Corrosion of the rope or end attachments.

v. Metal mesh slings must be immediately removed from service if any of the following conditions are present:

- a. A broken weld or broken brazed joint along the sling edge.
- b. Reduction in wire diameter of 25 percent due to abrasion or 15 percent due to corrosion.
- c. Lack of flexibility due to distortion or corrosion.

vi. Synthetic web slings must be removed from service and destroyed if any of the following conditions are present:

- a. Acid or caustic burns
- b. Melting or charring of any part of the sling service
- c. Snags, punctures, tears or cuts
- d. Broken stitches
- e. Distortion of fittings

vii. Requirements of Plate Clamps:

- 1. The rated load of the plate clamp must be marked on the main structure.
- 2. Care must be taken to make certain the load is correctly distributed for the plate clamp being used.
- 3. Do not allow load or plate clamp to come into contact with any obstruction.
- 4. The plate clamp must not be used for side pulls or sliding the load.
- 5. When lifting stainless steel or special alloys, ensure plate clamp is designed for use on



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 64 of 162

the specific metal.

13.2.4.4.3 SIGNALING PRACTICES:

- The "slinger" is responsible for attaching and detaching the load to and from the crane. He shall:
 - have received appropriate training on general safe lifting operations;
 - be capable of selecting lifting gears suitable for the loads;
 - liaise with the operator and direct the movement of the crane safely.
- The "signaller" is responsible for relaying the signal from the slinger to the crane operator. He shall:
 - have received appropriate training on general safe lifting operations;
 - be able to direct the movement of the crane and loads.

Suggested hand signals



Note: During the lifting operation, either the slinger or signaller shall communicate with the operator. Other communication methods (e.g., wireless walkie-talkies, telephones, etc.) may also be used.

Fig. 13.2.4.4 Recommended Signalling Practices



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 65 of 162

13.2.5 DEMOLITION WORK

Before any demolition work is commenced and also during the process of the work the following shall be ensured, besides using the Work Permit:

1. All roads and open areas adjacent to the work site shall either be closed, suitably protected or restricted for movement
2. No electric cable or apparatus which is liable to be a source of danger nor a cable or an apparatus used by the operator shall remain electrically charged.
3. All practical steps shall be taken to prevent danger to persons employed from the risks of fire or explosion or flooding. No floor, roof or other part of the building shall be so overloaded with debris or materials as to render them unsafe.

13.2.6 T&Ps General

1. All T&Ps/ MMEs should be of reputed brand/appropriate quality & must have valid test /calibration certificates bearing endorsement from competent authority of BHEL.
2. Subcontractor to also submit monthly reports of T&Ps deployed and validity test certificates to BHEL safety Officer as per the format/procedure of BHEL.
3. Tagging and punching in all lifting tool is compulsory with SWL, sr. no. and due date.
4. All T&Ps shall be inspected by authorized Third Party agency as per applicable frequency. BHEL shall be kept informed of any such scheduled inspection
5. All T&Ps shall be internally inspected in each quarter and colour coded as below.

13.2.6.1 T&P Color Coding Procedure:

Inspections and tests shall be documented by means of color coding which shall verify that inspections or testing are current and that all receptacles, portable Power tools, Lifting Tools & Tackles have been inspected and tested as required. The color codes used on the project shall be:

GREEN	BLUE	YELLOW	RED
January February March	April May June	July August September	October November December

Table. 13.2.6.1 T&P Color Coding Procedure

- i. The cycle of colors shall be Quarterly as a minimum or as decided by BHEL. The color code tape / Sticker shall be clearly visible to designate the period for which the inspections and tests were conducted.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 66 of 162

- ii. Following the initial inspection, the equipment must be color-coded quarterly as per color-coding instructions that will be issued by the subcontractor.
- iii. Fire extinguisher with the current month color-coding inspection sticker must be provided and secured in the platform.
- iv. All slings shall be regularly inspected in accordance with the requirement of the project for frequent and periodic inspections and discard immediately if they fail to meet the minimum requirements of the project.
- v. The Subcontractor's Safety Officer shall ensure that all PPE is inspected prior to its issue. He is to ensure all subcontractor personnel are using safe and proper PPE equipment. Regular inspections on the PPE shall be carried out and personnel not adhering to those inspections shall be removed immediately from the site.
- vi. A five (10) day interval period shall be given into each monthly color code change. During this five (10) day period either color shall be acceptable.

13.2.7 CHEMICAL HANDLING

1. Displaying safe handling procedures & MSDS for all chemicals such as lube oil, acid, alkali, sealing compounds etc, at work place.
2. Where it is necessary to provide and/or store petroleum products or petroleum mixture & explosives, the subcontractor shall be responsible for carrying out such provision / storage in accordance with the rules & regulations laid down in the relevant petroleum act, explosive act and petroleum and carbide of calcium manual, published by the chief inspector of explosives of India. All such storage shall have prior approval if necessary from the chief inspector of explosives or any other statutory authority. The subcontractor shall be responsible for obtaining the same.
3. The used containers of chemicals shall be segregated and disposed off suitably
4. In case the used containers need to be re-used, all traces of the chemical to be removed by thorough cleaning with detergents etc. under trained supervision

13.2.8 ELECTRICAL SAFETY

1. Only electricians licensed by appropriate statutory authority shall be employed by the subcontractor to carry out all types of electrical works. The subcontractor shall maintain adequate number of qualified electricians to maintain his temporary electrical installations.
2. Power supply to all equipment at site to be routed through MCBs of appropriate rating. A 'Power Supply Distribution Plan' shall be prepared and submitted to BHEL Engineer for approval



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 67 of 162

3. All power supplies through cables shall be underground or overhead with height > 3mtrs.
4. All distribution boxes shall be locked and the key controlled by site management of concerned subcontractor.
5. All individual equipment & tools at site shall be powered through Earth Leakage Circuit Breakers of 30 mA sensitivity.
6. These MCBs and ELCBs shall be regularly tested as per Clause 14
7. All fuses and fuse wires shall be of standard size and rating.
8. All electrical appliances used in the work shall be in good working condition and shall be properly double earthed other than armour earthing.
9. All extension boards shall have separate switches for all sockets / connections
10. All portable electric tools used by the subcontractor shall have safe plugging system to source of power and be appropriately earthed.
11. Providing adequate no. of 24 V sources and ensure that no hand lamps are operating at voltage level above 24 Volts especially in confined spaces like inside water boxes, turbine casings, condensers etc.
12. Electrical appliance shall have proper earthing and for appliances equal to & more than 415V shall have two separate earthing (as per IS-3043-1987)
13. Details of earth resource and their test date to be given to BHEL safety officer as per the prescribed formats of BHEL
14. The subcontractor shall use only properly insulated and armoured cables and conform to the requirement of Indian Electricity Act and Rules for all wiring, electrical applications at site.
15. BHEL reserves the right to replace any unsafe electrical installations, wiring, cabling etc. at the risk & cost of the subcontractor.
16. No maintenance work shall be carried out on live equipment
17. Adequate precautions shall be taken to prevent danger for electrical equipment. No materials on any of the sites of work shall be so stacked or placed as to cause danger or inconvenience to any person or the public
18. The subcontractor shall carefully follow the safety requirement of BHEL/ the purchaser with the regard to voltages used in critical areas.
19. Wiring and Branch Circuits Must be protected by a proper amperage over-current device such as a HRC fuse or circuit breaker. Such installations must be located so as to prevent physical damage to the wire conductors & panels.

20. Portable Electric Lights

- a. Portable electric lights used in wet or potentially wet locations must be either low voltage type (24 volts or less) or protected by a GFI (ground fault interrupter).
- b. They must be visually checked before each use and periodically while in use to assure their original integrity is maintained.
- c. Cords with cuts, breaks, deep abrasions, etc. shall be taken out of service immediately.
- d. Repairs to extension cords shall only be performed by qualified/ licensed electricians.
- e. Must not be allowed to lie in wet or potentially wet areas.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 68 of 162

21. Underground Cables:

- a. Every electric line or cable of unknown origin that is discovered or exposed during a digging, drilling, probing, or similar operation is to be considered as energized and life threatening.
 - b. The senior company employee on the site will ensure that all necessary safety precautions are taken in order to isolate the line from all workers and the public.
 - c. Such precautions may include halting the operation if appropriate.
 - d. The senior company employee on the site is to then contact the proper authorities to have the line identified and either confirmed to be abandoned and/or made safe for continuing the work.
 - e. Any and all underground lines that are discovered or become severed must be considered energized on both sides, and be treated accordingly.
22. In general, equipment or machinery being moved or transported must maintain minimum clearances of 25 ft. to all power lines.
 23. TAG IN/ TAG OUT must be in force in Switch Room and all Distribution Boxes for live power line. The authorized person's name and contact no shall be displayed
 24. Ensure "double insulated" three - core cables and three pin connectors are used and are properly ground "all insulated" types, all electrical tools and appliances must be manufactured for industrial use.
 25. All connections shall be electrically and mechanically sound and properly insulated. Taped joints are not permitted. Connections to socket outlets must be made with proper plugs.
 26. Splices in electrical cords are not permitted. Repairs must be made at the socket connection and retain the same mechanical and dielectric condition of the original connection.
 27. Damaged or defective electric tools, equipment and extension cords, etc. must not be used and shall be tagged out of service, removed from the work area and taken back to stores.
 28. Only licensed electricians are authorized to repair and work on electrical equipment. Tampering with electric tools or equipment by others could result in termination.
 29. Temporary electric cabling should be elevated 2.2 meters above the floor/ground or covered for protection. It must be kept clear of walkways and other locations where it may be exposed to damage or create a tripping hazard.
 30. Energized wiring in junction boxes, circuit breaker panels and similar places must be covered and locked at all times.
 31. Areas with live high voltage wires or terminals must be barricaded against entry and warning signs posted Danger – High Voltage and Authorized Personnel Only.
 32. Personnel should never work on energized equipment, de-energizing (lockout/tag out) the equipment is always the first requirement.
 33. The lockout and tag out procedure will be used when testing or working on, or around, energized installation.
 34. Working around energized equipment should never be done alone. A second electrician must always be available for assistance.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 69 of 162

35. If lockout/tag out of the work is infeasible (must be demonstrated), work on energized electrical circuits must be approved by the Site In-charge. All safety precautions necessary must be taken, PPE use must be evaluated per the exposure and used, i.e high/low voltage gloves, insulated shoes, overcoats/aprons, face shields, and other protective equipment like insulated tools, blankets, mats, etc. must be used.
36. The welding machines earth leads shall be properly fixed without loose contacts. The earth cable only has to be used. No steel members shall be used as earth leads.
37. Electrical crews must be qualified for the equipment and tools they work on, including being trained in Cardio-Pulmonary Resuscitation (CPR) methods and First Aid for rendering help in the event of electric shock.

38. Qualified Persons for Electrical Works

One who is trained and wiremen licensed to Govt of State and familiar with the construction, operation and safety hazards of the equipment upon which they are permitted to work.

- i. Qualified persons are intended to be only those who are well acquainted/experienced with and thoroughly conversant in the electric equipment and electrical hazards involved with work being performed.
- ii. Only qualified persons may be permitted to work on or near exposed energized parts. Such persons are required to have been trained in three specific areas:
- iii. Qualified persons must be capable of working safely on energized circuits;
- iv. Must be familiar with the proper use of special precautionary techniques and procedures based on equipment and exposure; and
- v. Must be familiar with required personal protective equipment, insulating and shielding materials, and insulated tools.
- vi. Qualified persons are expected to be able to evaluate unknown situations and adjust their activities in such a way that only safe work practices are used. Such behavior is the responsibility of the qualified person.
- vii. It is possible and likely for an individual to be 'qualified' with regard to certain equipment in the work place, and unqualified on other equipment they must know their limitation and stop work if not qualified on what equipment they were to work on.
- viii. An employee who is undergoing on-the-job training, who, in the course of such training, has demonstrated an ability to perform duties safely at his or her level of training, and who is under the direct supervision of a qualified person is considered to be a qualified person for the performance of those duties. The process must be documented as proof.

13.2.9 USE OF HAND TOOLS AND POWER-OPERATED TOOLS

13.2.9.1 General Provisions

- a. All hands and power tools and similar equipment, shall be maintained in safe condition.
- b. When power operated tools are designed to accommodate guards, they shall be equipped
- c. with such guards, when in use;
- d. Belts, gears, shafts, pulleys, sprockets, spindles, drums, fly wheels, chains and other reciprocating, rotating or moving parts of the equipment shall be similarly guarded;
- e. Personnel using hand and power tools and exposed to the hazard of falling, flying, abrasive, and splashing objects, or exposed to harmful dusts, fumes, mists, vapors, or gases shall be



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 70 of 162

provided with the particular personal protective equipment necessary to protect them from the hazards;

- f. All hand-held powered platen sanders, grinders, grinders with wheels of 5 cm or less, routers, planers, laminate trimmers, nibblers, shears, scroll saws and jigsaws with blade shanks of 0.5 cm wide or less shall be equipped with only a positive on-off control.
- g. All hand-held powered drills, tappers, fastener drivers, horizontal, vertical or angle grinders with wheels greater than 5 cm in diameter, disc sanders, belt sanders, reciprocating saws, saber saws and other operating powered tools shall be equipped with a momentary contact on control provided that turnoff can be accomplished by a single motion of the same finger or fingers that turn it on.

13.2.9.2 Hand Tools

- a. The subcontractor shall not issue or permit the use of unsafe hand tools;
- b. Wrenches including adjustable pipe end and socket wrenches shall not be used when saws are sprung to the point that slippage occurs;
- c. Impact tools such as drift pins, wedges and chisels shall be kept free of mushroomed heads;
- d. The wooden handles of tools shall be kept free of splinters or cracks and shall be kept tight on the tools.

13.2.9.3 Power Operated Tools

- a. Electric power operated tools shall be either of the approved double-insulated type or shall be grounded;
- b. The use of electric cords for hoisting or lowering loads shall not be permitted;
- c. Pneumatic power tools shall be secured to the hose or whip by some positive means to prevent the tool from becoming incidentally disconnected;
- d. Safety clips or retainers shall be securely installed or maintained on pneumatic impact (percussion) tools to prevent attachments from being incidentally expelled;
- e. All pneumatically riveting machine staplers and other similar equipment provided with automatic fastener feed, which operate at more than 7 kg/cm² pressure at the tool a safety device on the muzzle to prevent the tool from ejecting the fasteners unless the muzzle is in contact with the work surface;
- f. Compressed air shall not be used for cleaning purposes except when the pressure is reduced to less than 2 kg/cm² and that too with effective chip guarding. The 2 kg/cm² pressure requirement does not apply to concrete form, mill scale and similar cleaning purposes;
- g. The manufacturer's safe operating for hoses, pipes, valves, filters and other fittings shall not be exceeded;
- h. Only personnel who has been trained in the operation of the particular tool shall be allowed to operate power-actuated tools;
- i. The tool shall be tested each day before loading to see that the safety devices are in proper working condition. The method of testing shall be accordance with the manufacturer's



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 71 of 162

recommended procedure;

- j. Any tool found not in proper working order, or that which develops a defect during use, shall be immediately removed from service and not used until properly repaired;
- k. Tools shall not be loaded until just prior to the intended firing time. Neither loaded nor empty tools are to be pointed at any other person. Hands shall be kept clear of the open barrel end;
- l. Loaded tools shall not be left unattended;
- m. Fasteners shall not be driven into very hard or brittle materials including, but not limited to, cast iron, glazed tiles, surface hardened steel, glass block, live rock, face brick or hollow tiles;
- n. Driving into materials that can be easily penetrated shall be avoided unless backed by a
- o. substance that will prevent the pin or fastener from passing completely through and creating a flying missile hazard on the other side;
- p. No fastener shall be driven into a palled area caused by an unsatisfactory fastening;
- q. Only non-sparking tools shall be used in an explosive or flammable atmosphere;
- r. All tools shall be used with the correct shield, guard or attachment as recommended by the manufacturer.

13.2.9.4 Abrasive Wheels and Tools

- a. All grinding wheel must be ISO certified only.
- b. All grinding machines shall be supplied with sufficient power to maintain the spindle speed at safe levels under all conditions of normal operation;
- c. Grinding machines shall be equipped with suitable safety guards;
- d. The maximum angular exposure of the grinding wheel periphery and sides shall not be more than 900, except that when the work requires contact with the wheel below the horizontal plane of the spindle, the angular exposure shall not exceed 1200. In either case, the exposure shall begin not more than 8.650 above the horizontal plane of the spindle. Safety guards shall be strong enough to withstand the bursting of the wheel;
- e. Floor and bench-mounted grinders shall be work-rests, which shall be rigidly supported and readily adjustable. Such work-rests shall be kept at a distance not to exceed 5 mm from the surface of the wheel;
- f. Cup type wheels used for external grinding shall be protected by either revolving cup guard or a band type guard;
- g. When safety guards are required, they shall be mounted as to maintain proper alignment with the wheel and the guard and the guard and its fastening shall be adequate strength to retain the fragments of the wheel in case of incidental breakage. The maximum angular exposure of the grinding wheel periphery and sides shall not exceed 1800;
- h. Portable abrasive wheel used for internal grinding shall be provided with suitable safety flanges;
- i. When safety flanges are required, they shall be used only with wheels designed to fit the flanges. Only safety flanges, of a type and design and properly assembled so as to ensure that the pieces of the wheel will be retained in case of incidental breakage, shall be used;
- j. All abrasive wheels shall be closely inspected and ring tested before mounting to ensure that



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 72 of 162

they are free from cracks or defects;

- k. Grinding wheels shall fit freely on the spindle and shall not be forced on. The spindle nut shall be tightened only enough to hold the wheel in place;
- l. All employees using abrasive wheels shall be protected by suitable eye protection equipment.

13.2.9.5 Wood Working Tools

- a. All fixed power driven woodworking tools shall be provided with a disconnect switch that can either be locked or tagged in the off-position;
- b. The operating speed shall be attached or otherwise permanently marked on all circular saws over 0.5 m in diameter or operating at over 3000 peripheral rpm. Any saw so marked shall not be operated at a speed other than that marked on the blade. When a marked saw is re-tensioned for a different speed, the marking shall be corrected to show the new speed;
- c. Automatic feeding devices shall be installed on machines wherever the nature of the work will permit. Feeder attachments shall have the feed rolls or other moving parts covered or guarded so as to protect the operator from hazardous points;
- d. All portable power driven circular saws shall be equipped with guards above and below the base plate or shoe. The upper guard shall cover the saw to the depth of the teeth, except for the minimum arc required to permit the base to be tilted for bevel cuts. The lower guard shall cover the saw to the depth of the teeth, except for the minimum arc required to allow proper retraction and contact with the work. When the tool is withdrawn from the work, the lower guard shall automatically and instantly return to the covering position.

13.2.10 START UP, COMMISSIONING AND TESTING:

There are various activities involved prior to commissioning- the major ones are -Hydraulic Test, Steam Blowing, Transformers Charging, Boiler Light Up, Rolling and Synchronisation and Full loading of unit.

- a. These activities shall be personally supervised by the site executive along with the commissioning engineer.
- b. Appropriate Work Permits shall be taken as applicable
- c. The readiness of upstream and downstream system shall be ensured before taking up.
- d. These shall be handled strictly by the authorized persons only and the team shall be suitably briefed about the activity including hazards & risks involved and control plan by the concerned executive-in-charge before start.
- e. Entry of persons to the area of activity shall be suitably restricted and the emergency functions like Ambulance, first aid center and Fire station shall be intimated about the plan well in advance.
- f. Tag-in/ Tag-out shall be in place while charging transformer and whenever necessary.
- g. Electricians with valid wiremen license only shall be permitted to work on power lines.
- h. The area and the passage shall be adequately illuminated.



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 73 of 162

13.2.11 FIRE SAFETY

Numbers and types of Fire Extinguishers shall be ensured as follows:

Sl. No	Type of Fire Risk (Class of Fire)	Extinguishing Medium & Relevant Indian Standard	Scale of Equipment (Minimum recommended)
1.	CLASS 'A' Fires involving ordinary combustible materials like wood, paper, textiles, rubber etc. (Ordinary hazard or low fire load)	WATER Soda acid type, water type (gas pressure) and water type (constant air pressure) IS: 934 -1976; IS: 940 -1976; IS: 6234 -1971	For every 600 square meter floor area or part, one 9-litre capacity. Minimum 4 numbers per floor or room; should not be required to travel more than 15 meter to reach any extinguisher.
2.	CLASS 'A' (Extra hazard & high fire load)	-do	-do – (Also, consult local fire authority).
3.	CLASS 'A' (Special hazards)	-do	-do – Extra provision For every 100 square meter floor area or part, one 4.5 Kg. CO ₂ ; minimum 2 numbers per room; should not be required to travel more than 10 meter to reach any extinguisher.
4.	CLASS 'B' (Fires in flammable liquids like oils, solvents, petroleum, products, varnishes, paints, etc. where blanketing effect is essential) (Storage and handling in small quantities)	FOAM / CARBON DIOXIDE / DRY CHEMICAL POWDER IS: 933 -1976; IS: 2878 1976; IS: 2171 1976; IS: 4308 -1982	For every 50 square meter floor area or part, 2 numbers 9 -liters foam or 5 kg dry powder; should not be required to travel more than 10 m in the area of storage to reach any extinguisher.
5.	CLASS 'B' (Bulk storage other than in tank form)	-do -	-do- (but minimum 3 numbers per room)
6.	CLASS 'C' (Fires involving gaseous substances under pressure where it is necessary to dilute the burning gas at a very fast rate with an inert gas or powder) (locations of storage and handling of gas cylinders)	CARBON DIOXIDE / DRY CHEM. POWDER. The best way to extinguish such fire is by stopping the flow of fuel gas to the fire. Container is kept cool with water spray. IS: 2878 1976; IS: 2171 -1976; IS: 4308 -1982	For every 100 square meter floor area or part; 2 numbers, 10 kg powder extinguisher or 6 kg CO ₂ ; minimum 3 nos. per room; should not be required to travel more than 10 meter to reach any extinguisher.
7.	CLASS 'D' Fires involving metals like magnesium, aluminum, zinc, potassium etc. where the burning metal is reactive to water and which require special extinguishing media or technique	SPECIAL DAY POWDER IS: 2171 -1976 IS: 4861 -1968	For every 50 square meter floor area or part, 2 nos. 5 kg special dry powder; minimum 3 nos. per room; should not be required to travel more than 10 meter to reach any extinguisher.
8.	MIXED OCCUPANCY (electrical); Generators; Transformers; etc.	CARBON DIOXIDE DRY POWDER, IS: 2878 -1976; IS: 2171 -1976	For every 100 square meter floor area or part one 10 kg CO ₂ . Minimum 2 numbers for every location should not be required to travel more than 10 meter to reach an extinguisher.

Note: Due to peculiarities of the power plant construction sites, there would be locations in the construction areas of Boiler, Turbine, Generator, Transformer, etc. where different types of fire risk (classes of fire) may co-exist. Special



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER

Rev.: 00

Date:25.04.19

Page 74 of 162

care shall be taken while selecting and installing portable fire extinguishers for such locations so that all types of fire risk that may co-exist, are adequately covered. Similar special care shall be taken for storage areas.

1. All Electrical welding booths shall be equipped with appropriate Fire Extinguisher
2. Appropriate Fire Extinguishers shall be made within easy reach of all welding operations
3. Fire extinguishers shall be regularly tested and last checked date to be indicated on each.
4. Providing appropriate firefighting equipment at designated work place and nominate a fire officer/warden adequately trained for his job.
5. Subcontractor shall provide enough fire protecting equipment of the types and numbers at his office, stores, temporary structure in labour colony etc. Such fire protection equipment shall be easy and kept open at all times.
6. The fire extinguishers shall be properly refilled and kept ready which should be certified at periodic intervals. The date of changing should be marked on the Cylinders.
7. All other fire safety measures as laid down in the "codes for fire safety at construction site" issued by safety coordinator of BHEL shall be followed.
8. Non-compliance of the above requirement under fire protection shall in no way relieve the subcontractor of any of his responsibility and liabilities to fire incident occurring either to his materials or equipment or those of others.
9. Emergency contacts nos. must be displayed at prominent locations
10. Tarpaulin being inflammable should not be used (instead, only non-infusible covering materials shall be used) as protective cover while preheating, welding, stress relieving etc. at site.

13.2.12 HSE PREPAREDNESS FOR ADVERSE CLIMATES AND WEATHER

Subcontractor to remain updated on possible adverse weather conditions through reliable sources and all precautions taken accordingly.

13.2.12.1 SUMMER

1. The Working Time and Lunch Hour will be as per instruction of Statutory Authorities (no work between 11am to 3:30pm). However, in case temp comes down due to rain/cloudy weather work will continue as per normal routine.
2. During long lunch break, worker will be allowed to go back home for rest. Those who will like to stay back will avail at the facility of rest shed or other designed area.
3. They will be allowed to take small break during work as per their need.
4. Water sprinkling will be done on roads to reduce dust concentration.
5. Workers will be provided with adequate cool drinking water and Butter milk/Lemon water etc.
6. Adequate ORS stock will be made available at the work location in the First-Aid Box for use as needed and at First-aid Center for emergency need.
7. Fire prevention shall be on high alert, with removal of dry grass and bushes, etc, inside and outside the surrounding work areas. No smoking, and control of open flame/sparks shall be maintained and monitored.
8. Worker will be informed about the Do's and Don'ts to be followed during summer in the Pre Job Brief.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 75 of 162

Do's & Don'ts

9. Drink plenty of cool water and other non-alcoholic fluid and keep body well hydrated.
10. Eat salt in food to replenish loss of salt through sweating.
11. Avoid over physical exercise.
12. Have adequate sleep at night.
13. Eat light and less spicy food
14. Avoid eating food which was cooked long time ago.
15. Nobody should use small water bodies such as pits, running rain water through crevices etc. for drinking and cleaning purpose as it may be unhygienic.

Emergency Handling

In case of emergency due to heat disorder:

16. Rescue the victim from workplace and place under shed.
17. If to be rescued from height, use stoke basket or rescue kit.
18. Inform Ambulance immediately.
19. If nearby any air conditioned room/shed is available, place him inside the room/shed.
20. Administer First aid by trained First aider for Heat Disorder
21. If conscious, give him ORS solution to drink.
22. If required send the victim hospital immediately.

13.2.12.2 Monsoon

A. Height Work & Structural Safety:

1. Ensure that all height work platforms are barricaded and avoid any highly hazardous
2. height work.
3. Ensure that all personnel have good quality and intact safety shoes
4. Stop all dangerous height work during rain
5. Explain Do's and Don'ts to workers during Tool Box Meetings
6. Ensure that there are no weak structures, boards etc. that can fall during high winds
7. Do not allow any loose material (e.g. GI sheet, Ply board, empty cement bag, aluminum foil, foam sheets etc.) on roof sheds or top of structures.
8. Do not permit any one to ride up or come down scaffolds frame work during heavy wind or rain.
9. Provide "anchor" of adequate strength to scaffolds and other high-rise structures.
10. All rest sheds and GI sheds will be anchored into the round and wall and roof panels will be secured with J hook to prevent shed from blowing over or parts/pieces becoming airborne. Proper earthing per IS standard is also to be installed.
11. Do not go alone nor permit anyone to stay at tower-tops, roof-tops, high structures or on electrical poles during the course of stormy weather or heavy rain.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 76 of 162

B. Electrical:

1. All electrical connections / loads have to be routed through ELCB / RCCB (residual current circuit breaker) whose rating should be 30mA.
2. RCCB operational checks need to be done DAILY / WEEKLY during monsoon season.
3. Avoid joints on power cables which need to be laid over-head or under-ground, better not to have any joint at all. In case joints become essential, such cables must be housed rigidly and insulation must be provided as per approved standard. The joint shall be suitable for outdoor use.
4. All electrical distribution board shall be properly covered at top and sides to protect from rain water. Extension boards shall be protected from rain water.
5. Ensure proper "earthing" for each and every electrical appliance.
6. Double earthing need to be provided for 3-phase power supply and for voltage more than 220V.
7. Provide lightening arrestors at the top of Boiler 3 and boiler 4 and rest sheds which are not covered by existing lightening arrestor of other installation.

C. Others:

1. Maintain smooth flow on open drains. i.e. no obstruction or blockade shall be made on storm water drains. If required, make temporary drains.
2. Arrange back-filling of excavated pits on war-footing basis.
3. Arrange bringing down booms of all cranes, hydra machines during stormy weather (wind speed 40-50 kmph)
4. Confirm that all gantry cranes are effectively choked to prevent rolling and toppling.
5. Do not forget to deep ready a dew battery operated lights at site-offices during rainy season.
6. Avoid using wet damp clothes.
7. Barricade excavated zone filled with water.
8. Engage diesel operated water pump to dewater work area. For electrically operated water pump, the starter shall be protected from rain water. All rotating parts shall be guarded. Ensure availability of sufficient water pumps.

D. Health and hygiene:

1. Monsoon reduces the immunity of our body and makes us vulnerable to many diseases which are commonly associated with this season. It is time for us to keep our body challenging against disease by boosting our immunity and taking safety measures against these diseases.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 77 of 162

2. The diseases associated with monsoon are Malaria, Jaundice, Gastro-intestinal infections, like typhoid, cholera etc. apart from these viral infections like cold and cough also make their presence felt. Majority of above said diseases are on account of:
3. Puddle of water formed due to rain become breeding grounds for mosquitoes which spread disease like, malaria and dengue fever. As a precautionary measure against mosquito-bite disease one can use mosquito net around the end which is better choice to mosquito repellants like mats and coils.
4. Pollution of drinking water during monsoon is very common. It is very necessary to drink clean and pure water when water-borne monsoon diseases like diarrhea and gastro-intestinal infections threaten us.
5. Walking in dirty water during rainy season leads of numerous fungal infection which affect toes and nails. Diabetic patients have to take a special care about their feet. Keeping feet always dry and clean is very necessary. Avoid walking in dirty water. Keep shoes socks and raincoats dry and clean.

E. Workmen will be made aware of following Do's and Don'ts:

1. Do not sleep in daytime.
2. Avoid over physical exertion.
3. During lightning and thunder storm, do not take shelter under tree. Take shelter inside rest shed or store room.
4. Wash vegetables with clean water and steam them well to kill germs.
5. Avoid eating un-cooked foods and salads should be washed properly before consumption.
6. Drink plenty of water and keep body well-hydrated.
7. Always keep the surrounding area dry and clean. Don't allow to get water accumulated around.
8. Keep body warm as viruses attack immediately when body temperature goes down.
9. Do not enter air conditioned room with wet hair and damp cloths.
10. Dry your feet and webs with soft dry cloth whenever they are wet.
11. Eat light and less spicy food.
12. Avoid eating food which was cooked long time ago.
13. Eat salt in food to replenish loss of salt through sweating.

13.2.12.3 Emergency Weather Conditions

A. Cyclone/Severe thunder storm

In the event of Cyclone/Severe thunder storm, alert will be issued by subcontractor on notification received by Govt. authorities/Metrological departments Customer or BHEL.

The actions required during cyclone/rough weather:

1. Check and advice subcontractors to cleanup work area. Pick up all loose and unused material of respective supervisor's area.
2. Tie to secure all gas cylinders to avoid displacement and unsafe conditions which could be due to wind pressure.

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

3. Secure portable electricity generating sets and other equipment, pumps, hoses etc.
4. Make preparation for removal of water logging.
5. Take review of work activity and make preparation for removal of equipment and material from vulnerable areas.
6. Isolate/turn off all electrical power from the main panel/switches. Secure and anchor panels properly.
7. Recheck anchorage/tie of all temporary structures/sheds, tall objects, cranes, rigs, scaffolds etc. to avoid toppling due to wind force.
8. Cranes boom shall be secured, either locked or lowered the booms as reasonably and practicably possible and rigs to safe position for the safety point of view.
9. Group up all trash barrels, wooden pallets, forms; wooden decks etc. and anchor properly.
10. Welding machines, air compressors and such equipment are to be grouped together and secured to the stable objects. Welding leads, electrical cables, hoses are to be rolled up and secured properly.
11. Set on site vehicles on high ground in the site area with brakes set firmly.
12. Anchor all tanks, vessels, gas cylinders that may be moved by high wind and water.
13. Evacuate job site.

Personnel Evacuation:

14. Personnel Evacuation will be required if predicted wind speed and storm surge heights are beyond acceptable limits as per the instructions from Govt. Authorities/ Metrological departments or Customer.
15. Once the warning is received for personnel evacuation, an emergency response team shall be formed. The team will work with local authorities and other agencies formed/deployed to evacuate and transport all personnel involved in the project to the cyclone shelter.
16. Cyclone may be followed by the calm "EYE", be aware of it. If the wind suddenly drops, don't assume the cyclone is over. Violent wind may resume from the opposite side direction. Wait for the official "All clear Signal".
17. After the cyclone, do not go outside until officially communicated about safe situation outside. Use recommended routes for returning. Do not panic or rush while returning.
18. Checking of gas leaks and well being of electrical appliances is essential before leaving the site.
19. Follow local communications for official warning and advice. The construction Manager shall also obtain updates from customer/metrological departments and communicate to the personnel on project site.

13.2.12.4 Preparedness for Other Adverse Climates and Weather Conditions

All Preventive and Precautionary measures to ensure Health & Safety of workers in all possible adverse weather conditions based on the analysis of the local area conditions to be taken by the subcontractor

13.3 ENVIRONMENTAL CONTROL

1. Environment protection has always been given prime importance by BHEL. Environmental



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 79 of 162

damage is a major concern of the principal subcontractor and every effort shall be made, to have effective control measures in place to avoid pollution of Air, Water and Land and associated life.

2. Subcontractor shall list out all applicable environmental aspects and impacts, and ensure control measures to manage the same.
3. Chlorofluorocarbons such as carbon tetrachloride and trichloroethylene shall not be used.
4. Waste disposal shall be done in accordance with the guidelines laid down in the project specification.
5. Any chemical including solvents and paints, required for construction shall be stored in designated bonded areas around the site as per MSDS.
6. In the event of any spillage, the principle is to recover as much material as possible before it enters drainage system and to take all possible action to prevent spilled materials from running off the site. Subcontractor shall use appropriate MSDS for clean-up technique. Subcontractor shall be responsible for the cleanliness of their own areas.
7. Subcontractor shall ensure that noise levels generated by plant or machinery are as low as reasonably practicable. Where the subcontractor anticipates the generation of excessive noise levels from his operations the subcontractor shall inform BHEL accordingly so that reasonable & practicable precautions can be taken to protect other persons who may be affected.
8. It is imperative on the part of the subcontractor to join and effectively contribute to environmental protection measures such as tree plantation and towards social causes and maintaining good relations with local populace.
9. The subcontractor shall carry out periodic air and water quality check and illumination level checking in respective area of work place and take suitable control measure to maintain the same as per applicable laws / standards

13.3.1 WASTE MANAGEMENT

1. Subcontractor shall take suitable measures for waste management and fulfilling requirements of environment related laws/legislation as a part of normal construction activities.
2. Compliance with the legal requirements on storage/ disposal of paint drums (including the empty ones), Lubricant containers, Chemical Containers, and transportation and storage of hazardous chemicals will be strictly maintained.
3. Details of E-Waste, Hazardous Waste, shall be submitted to BHEL as per Format No. HSEP: 14-F18 and HSEP: 14-F19 respectively

13.3.1.1 BINS AT WORK PLACE

1. Sufficient rubbish bins shall be provided close to workplaces.
2. Bins should be painted yellow and numbered.
3. Sufficient nos. of drip trays shall be provided to collect oil and grease.
4. Sufficient qty. of broomsticks with handle shall be provided.
5. Adequate strength of employees should be deployed to ensure daily monitoring and service for waste management.

13.3.1.2 STORAGE AND COLLECTION

1. Different types of rubbish/waste should be collected and stored separately.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 80 of 162

2. Paper, oily rags, smoking material, flammable, metal pieces should be collected in separate bins with close fitting lids.
3. Rubbish should not be left or allowed to accumulate on construction and other work places.
4. Do not burn construction rubbish near working site.

13.3.1.3 SEGREGATION

1. Earmark the scrap area for different types of waste.
2. Store wastes away from building.
3. Oil spill absorbed by non-combustible absorbent should be kept in separate bin.
4. Clinical and first aid waste stored and incinerated separately.

13.3.1.4 DISPOSAL

1. Sufficient containers and scrap disposal area should be allocated.
2. All scrap bin and containers should be conveniently located.
3. Provide self-closing containers for flammable/spontaneously combustible material.
4. Keep drainage channels free from choking.
5. Make schedule for collection and disposal of waste.

13.3.1.5 WARNING AND SIGNS

1. Appropriate signage to be displayed at scrap storage area
2. No toxic, corrosive or flammable substance to be discarded into public sewage system.
3. Waste disposal shall be in accordance with best practice.
4. Comply with all the requirements of Pollution Control Board (PCB) for storage and disposal of hazardous waste.

13.4 HOUSEKEEPING

1. Keeping the work area clean/ free from debris, removing unused scaffoldings, scraps, insulation/ sheeting wastage /cut pieces temporary structures, packing woods etc. will be in the scope of the subcontractor.
2. Such cleaning has to be done by subcontractor within quoted rate, on daily basis by dedicated identified groups equipped with all require PPEs and training. The details of housekeeping group shall be provided to BHEL.
3. If such activity is not carried out by subcontractor / BHEL is not satisfied, then BHEL may get it done by other agency and actual cost along with BHEL overheads will be deducted from subcontractor's bill. Such decisions of BHEL shall be binding on the subcontractor.
4. Pests, such as beehives etc. shall be periodically removed in a humane fashion
5. **Following are to be taken care of on daily basis.**
 - i. All surplus earth and debris are removed/disposed of from the working areas to identified locations.
 - ii. Unused/Surplus cables, steel items and steel scrap lying scattered at different places /elevation within the working areas are removed to identify locations.
 - iii. All wooden scrap, empty wooden cable drums and other combustible packing materials, shall



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 81 of 162

be removed from workplace to identified locations. Sufficient waste bins shall be provided at different work places for easy collection of scrap/waste. Scrap chute shall be installed to remove scrap from high locations

- iv. Access and egress (stair case, gangways, ladders etc.) path should be free from all scrap and other hindrances.
- v. Workmen shall be educated through tool box talk about the importance of housekeeping and encourage not to litter.
- vi. Labor camp area shall be kept clear and materials like pipes, steel, sand, concrete, chips and bricks, etc. shall not be allowed in the camp to obstruct free movement of men and machineries.
- vii. Fabricated steel structures, pipes & piping materials shall be stacked properly.
- viii. No parking of trucks/trolleys, cranes and trailers etc. shall be allowed in the camp, which may obstruct the traffic movement as well as below LT/HT power line.
- ix. Utmost care shall be taken to ensure over all cleanliness and proper upkeep of the working areas

13.5 TRAFFIC MANAGEMENT

13.5.1 SAFE WORKPLACE TRANSPORT SYSTEM

- 1. Traffic routes in a work place shall be suitable for the persons or vehicles using them.
- 2. Traffic routes for pedestrians and vehicles shall be clearly demarcated and indicated
- 3. Traffic routes shall never intersect the area of work and shall not endanger the site personnel
- 4. For internal traffic, lines marked on roads / access routes and between buildings shall clearly indicate where vehicles are to pass.
- 5. Temporary obstacles shall be brought to the attention of drivers by warning signs / hazard cones.
- 6. Power cables shall be maintained at a minimum height above ground as specified in Indian Electricity Act & Rules.
- 7. Sensible speed limits shall set and clearly displayed. Painted Speed ramps preceded by a warning signs or marker are necessary for stretches of roads exceeding 50 meters.
- 8. The traffic route should be wide enough to allow vehicles to pass and re-pass oncoming or parked traffic and it may be advisable to introduce on-way system or parking restrictions.
- 9. Safest route shall be provided between places where vehicles have to call or deliver.
- 10. Avoid vulnerable areas/items such as fuel or chemicals tanks or pipes, open or unprotected edges and structures likely to collapse
- 11. Safe areas shall be provided for loading and unloading of material. Loading / Unloading Permit shall be taken from BHEL prior to any significant loading / unloading activity
- 12. Avoid sharp or blind bends. If this is not possible hazards should be indicated e.g. blind corner.
- 13. Ensure road crossings are minimum and clearly signed.
- 14. Entrance and gateways shall be wide enough to accommodate a second vehicle without causing obstruction.
- 15. Forklift trucks shall not pass over road hump unless of a type capable of doing so.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 82 of 162

16. Overhead electric cable, pipes containing flammable hazardous chemical shall be shielded by using goal posts height gauge posts or barriers.
17. The height of Power cables above areas of movement shall conform to Indian Electricity Rules
18. Road traffic signs shall be provided on prominent locations for prevention of accidents and hazards and for quick guidance and warning to employees and public.
19. Safety signs shall be displayed as per the project working requirement and guideline of the state in which project is done.
20. Vehicles hired or used shall not be parked within the 15m radius of any working area. Any vehicle, that is required to be at the immediate/near the vicinity, shall be approved by the person in-charge of the site.

13.5.2 TRAFFIC ROUTE FOR PEDESTRIANS

1. Where traffic routes are used by both pedestrians and vehicles road shall be wide enough to allow vehicles and pedestrians safely.
2. Separate routes shall be provided for pedestrians to keep them away from vehicles. Provide suitable barriers/guard at entrances/exit and the corners or buildings.
3. Where pedestrian and vehicle routes cross, appropriate crossing shall be provided.
4. Where crowd is likely to use roadway e.g. at the end of shift, stop vehicles from using them at such times.
5. Provide high visibility clothing for people permitted in delivery area.

13.5.3 WORK VEHICLES

Work vehicles shall be as safe stable efficient and roadworthy as private vehicles on public roads. Subcontractors shall ensure that drivers are suitably trained and have valid license and experience for the designated class of vehicle. All vehicle e.g. heavy motor vehicle forklift trucks dump trucks mobile cranes shall ensure that the work equipment conforms to the following:

1. A high level of stability.
2. A safe means of access/egress.
3. Suitable and effective service and parking brakes.
4. Windscreens with wipers and external mirrors giving optimum all round visibility.
5. Provision of horn, vehicle lights, reflectors, reversing lights, reversing alarms.
6. Provision of seat belts.
7. Guards on dangerous parts.
8. Driver protection - to prevent injury from overturning and from falling objects/materials.
9. Driver protection from adverse weather.
10. No vehicle shall be parked below HT/LT power lines in conformance to Indian Electricity Act & Rules.
11. Valid Pollution Under Control certification for all vehicles



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 83 of 162

13.5.4 DAILY CHECKS BY DRIVER

There should also be daily safety checks containing below mentioned points by the driver before the vehicle is used. Subcontractors should ensure that drivers carry out these checks as a minimum.

Brakes	Mirrors	Warning signals
Tires	Windscreen waters	Specific safety system i.e. control interlocks
Steering	Wipers	

13.5.5 TRANSPORTATION OF PERSONNEL AND MATERIALS BY VEHICLES

1. All drivers shall hold a valid driving License for the class of vehicle to be driven and be registered as an authorized BHEL driver with the Administration Department.
2. Securing of the load shall be by established and approved methods, i.e. chains with patented tightening equipment for steel/heavy loads. Sharp corners on loads shall be avoided when employing ropes for securing.
3. All overhangs shall be made clearly visible and restricted to acceptable limits
4. Load shall be checked before moving off and after traveling a suitable distance.
5. On no account is construction site to be blocked by parked vehicles Drivers of vehicles shall only stop or park in the areas designate by the stringing foreman.
6. Warning signs shall be displayed during transportation of material.
7. All vehicles used by Subcontractor shall be in worthy condition and in conformance to the Land Transport requirement

13.5.6 MAINTENANCE

All Vehicles used for transportation of man and material shall undergo scheduled inspections on frequent intervals to secure safe operation. Such inspections shall be conducted in particular for steering, brakes, lights, horn, doors etc. Site management shall ensure that work equipment is maintained in an efficient, working order and in good repair. Inspections and services carried out at regular intervals of time and or mileage. No maintenance shall be carried below HT/LT power lines.

13.6 EMERGENCY PREPAREDNESS AND RESPONSE

1. Subcontractor shall develop Emergency preparedness and response capability and Emergency Response Team as per [HSEP06: HSE Procedure for Emergency Preparedness and Response](#)
2. Availability of adequate number of first aiders and fire warden shall be ensured
3. All the subcontractor's supervisory personnel and sufficient number of workers shall be trained for fire protection systems. Enough number of such trained personnel must be available during the tenure of contract. Subcontractor should nominate his supervisor to coordinate and implement the safety measures and communicate the same to BHEL.
4. Assembly point shall be earmarked and access to the same from different location shall be shown
5. Fire exit shall be identified and pathway shall be clear for emergency escape.
6. Appropriate type and number of fire extinguisher shall be deployed as per Clause No. 13.2.11 and validity shall be ensured periodically through inspection
7. Adequate number of first aid boxes shall be strategically placed at different work places to cater



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 84 of 162

- to all emergency needs. Holder of the first aid box shall be identified on the box itself who will have the responsibility to maintain the same.
8. First aid center shall be developed at site with trained medical personnel and ambulance
 9. Emergency contact numbers of the site shall be displayed at prominent locations.
 10. Tie up with fire brigade shall be done in case customer is not having fire station.
 11. Tie up with hospital shall be ensured in order to ensure the availability of following services to victims quickly without wasting precious time:
 - a. Intensive Care Unit with Ventilator and other necessary life support systems
 - b. Facility of specialized Orthopedic Surgery – in case of fracture / amputation
 - c. Facility of specialized brain / neuro surgery – in case of head trauma
 - d. Facility of specialized burn unit / ward – in case of Fire / burn injury
 - e. and other facilities as per requirement at site location
- In case tie up with multiple hospitals is required to cover all possible accidents, same shall be done. The list of facilities to be regularly checked and updated.
12. A detailed emergency services (Fire / Medical etc.) tie up plan shall be submitted to BHEL in monthly report Format No. HSEP:14-F05
 13. Mock drill shall be conducted on different emergencies periodically to find out gaps in emergency preparedness and taking necessary corrective action

14 HSE INSPECTION

Inspection on HSE for different activities being carried out at site shall be done to ensure compliance to HSEMS requirements. The subcontractor shall maintain necessary safety equipment as applicable, to enable inspection personnel/agency perform Inspection. If any test equipment is found not complying with proper safety requirements then the Inspection Agency may withhold inspection, till such time the desired safety requirements are met.

The requirements of respective work permits are to be ensured by respective supervisors, safety personnel and area in-charges. In addition, the formats & checklists as per Clause 21 of this document provided by BHEL shall be used for inspection by Safety personnel (as a minimum), and records of inspection to be maintained. BHEL shall reserve the right to modify any Format in this document or introduce additional checklists / formats to ensure regular inspection of all equipment as per requirement.

14.1 DAILY HSE CHECKS

Both the Site Supervisors and HSE Supervisors are to conduct daily site Safety inspection around work activities and premises to ensure that work methods and the sites are maintained to an acceptable standard. The following are to form the common subjects of a daily safety inspection:



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 85 of 162

1. Height Work:

- Safe, barricaded platform
 - PPEs
 - Proper method
 - Awareness
- Personal Safety wears & gear compliance.
 - Complying with site safety rules and permit-to-work (PTW).
 - Positions and postures of workers.
 - Use of tools and equipment etc. by the workers.
 - The inspection shall be carried out just when work starts in beginning of the day, during peak activities period of the day and just before the day's work ends.

14.2 INSPECTION OF HEIGHT WORKING

- Any kind of height work (above 2 meters) shall not be carried out without active physical supervision by concerned supervisor or safety personnel. All non-conformances related to height work shall be handled on priority and closed immediately after halting the work.
- A roster of personnel deployed for inspection of height work and other critical activities shall be prepared and submitted to BHEL in monthly report Format No. HSEP:14-F05, in order to ensure effective supervision at all times
- Inspection on height working shall be conducted **daily** by supervisors before start of work to ensure safe working condition including provision of:

a. Fall arrestor	d. Fencing and barricading	g. Proper scaffolding with valid
b. Lifelines	e. Warning signage	Tags, access and egress.
c. Safety nets	f. Covering of opening	h. Illumination

- Inspection on height working shall be conducted once in a week by HSE officer as per
- Format no. HSEP: 14-F10.
- Medical fitness, including vertigo test of height worker shall be ensured.
- Height working shall not be allowed during adverse weather.

14.3 INSPECTION OF PPE

PPEs shall be inspected by HSE officer at random once in a week as per Format no. HSEP: 14-F06 for compliance to standard and provisions and any adverse observation shall be recorded in the PPE register.

14.4 INSPECTION OF T&Ps

- All T& Ps being used at site shall be inspected by HSE officer once in a month as per specific Formats in this document, or (if not available) general Format no. HSEP: 14-F07 for its healthiness and maintenance.
- A master list of T&Ps and validity of their inspection certificates shall be maintained by each agency and details shall be submitted to BHEL in monthly format no. HSEP:14-F05.
- The T&Ps which require third party inspection shall be checked for its validity during inspection.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 86 of 162

The third party test certificate should be accompanied with a copy of the concerned competent person's valid qualification record. BHEL shall be given advance intimation of Third Party Inspection. BHEL shall associate with Inspection as per discretion.

14.5 INSPECTION OF CRANES AND WINCHES

1. Cranes and winches shall be inspected by the operator through a daily checklist for its safe condition (as provided by the equipment manufacturer) before first use of the day.
2. Cranes and Winches shall be inspected by HSE officer once in a month as per Format no. HSEP: 14-F08 & F09 for healthiness, maintenance and validity of third party inspection.
3. The date of third party inspection and next due date shall be painted on cranes and winches.
4. The operators/drivers shall be authorized by sub-contractor based on their competency and experience and shall carry the I-card.
5. The operator should be above 18 years of age and should be in possession of driving license of HMV man & goods), vision test certificate and should have minimum qualification so that he can read the instructions and check list.

14.6 INSPECTION ON WELDING AND GAS CUTTING OPERATION

1. Supervisor shall ensure that no flammable items are available in near vicinity during welding and gas cutting activity.
2. Gas cylinders shall be kept upright.
3. Use of Flash back arrestor shall be ensured at both ends.
4. Inspection during welding and gas cutting operations shall be carried out by HSE officer once a month as per Format no. HSEP: 14-F11.
5. Use of fire blanket to be ensured to avoid falling of splatters during welding or gas cutting operation at height.
6. Availability of fire extinguisher in vicinity shall be ensured.

14.7 INSPECTION ON ELECTRICAL INSTALLATION / APPLIANCES

1. Ensure proper earthing in electrical installation
2. Use of ELCB at electrical booth
3. Electrical installation shall be properly covered at top where required
4. Use appropriate PPEs while working
5. Use portable electrical light < 24 V in confined space and potentially wet area.
6. Monthly inspection shall be carried out as per Format no. HSEP: 14-F12.

14.8 INSPECTION OF ELEVATOR

1. Elevators shall be inspected by concerned supervisors once in a week as per Format no. HSEP: 14-F13.
2. All elevators shall be inspected by competent person and validity shall be ensured.
3. The date of third party inspection and next due date shall be painted on elevator.

14.9 MONTHLY SITE INSPECTION

Subcontractor shall carry out monthly HSE inspection of all work areas as per Format No. HSEP:14-F20 and submit to BHEL

14.10 NON-CONFORMITY HANDLING:

Any serious non-conformances identified during inspection observed shall be addressed immediately.

In case immediate closure of non-conformities is not possible:

- work to be halted in the area
- Non-conformance to be generated and submitted to responsible person and BHEL
- non-conformance to be resolved through responsible agency / person
Only after closure of serious non-conformances, work to be allowed to resume.

All non-conformances & safety violations to be recorded and closed in a time bound manner.

15 HSE PERFORMANCE

HSE performance of subcontractor shall be monitored as per BHEL criteria, based on which, marks will be awarded. Marks can be used to evaluate and rate the contractor as per BHEL internal systems

HSE performance of the subcontractor shall be monitored as per the following parameters: (For each contract-wise package). **Periodicity:** RA Bill period

Sl. No.	Parameters of measurement	Ref Clauses	Weightage	Actual
1	Availability of safety officers at site – absence up to 15% permissible. Score proportionately gets reduced with higher rate of absence. Availability to be reckoned from start date of manpower mobilization	7.1	10	
2	Attendance by the safety officer and site CM (as applicable) in the meeting convened by BHEL	20	5	
3	Level of compliance w.r.t decisions taken in previous meetings/audit/inspection/as reported.	-do-	5	
4	Timely submission of monthly report on safety in the prescribed format	11	3	
5	Timely reporting any incident including near-miss to BHEL /Customer/statutory authority (if required) and submission of investigation report of all LTIs/	12	10	



**POWER
SECTOR**

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 88 of 162

	Major Property Loss incident and HSE events			
6	Degree of PPE compliance, Fall protection arrangements and safety net coverage	8.3, 14	15	
7	Level of compliance w.r.t safety rules	13,14	25	
8	Availability of proper first-aid facility, ambulance, hygienic labor colony and other adequate labor welfare initiatives, conducting of health check-up as per BOCW requirements	8	6	
9	Conducting induction training, skill training, tool box meeting, mock-drills, HSE Promotion, Emergency Preparedness and Response. Participation in BHEL training also counted	9.0	6	
10	Level of House-keeping, Environmental Control	13.3, 13.5	10	
11	Level of general illumination	8.4.11	5	
A	TOTAL Obtained		100	

Penalty score:

- i. For each fatality: -10
- ii. For each Major Incident: -07

NET TOTAL score will be arrived after deducting penalty score from Total score.

Subcontractor shall make available all data required for evaluation to BHEL as and when demanded.

1. If safety record of the subcontractor in execution of the awarded job is to the satisfaction of safety department of BHEL, issue of an appropriate certificate to recognize the safety performance of the subcontractor may be considered by BHEL after completion of the job.
2. 1.5% of running bill shall be cleared subject to certification of desired safety performance by BHEL

16 HSE PENALTIES FOR NON-COMPLIANCE

1. Nonconformity of safety rules and safety appliances will be viewed seriously and BHEL has right to impose fines on the subcontractor for every instance of violation noticed.
2. The applicable penalties for HSE violations are given in Format No. HSEP14-F14 of this document



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 89 of 162

3. The list of non-compliances given in above format is not exhaustive. The BHEL site in-charge has liberty to impose a penalty for any other non-compliance and incidents of any nature.
4. If principal customer or statutory and regulatory bodies impose penalty on ground of statutory non-compliance or non-compliance of HSE rules by the subcontractor or any incident of any nature including fatality or permanent disability, the same shall be passed on to the subcontractor with appropriate overhead
5. The penalty amount shall be recovered from subcontractors from the RA Bill, otherwise Final bill.

17 COMPENSATION TO ACCIDENT VICTIMS

1. BHEL shall recover the amount of compensation paid to victim(s) by BHEL towards loss of life / permanent disability due to an accident which is attributable to the negligence of contractor, agency or firm or any of its employees as detailed below.
 - b. **Victim:** Any person who suffers permanent disablement or dies in an accident as defined below.
 - c. **Accident:** Any death or permanent disability resulting solely and directly from any unintended and unforeseen injurious occurrence caused during the manufacturing/ operation and works incidental thereto at BHEL factories/ offices and precincts thereof, project execution, erection and commissioning, services, repairs and maintenance, trouble shooting, serving, overhaul, renovation and retrofitting, trial operation, performance guarantee testing undertaken by the company or during any works / during working at BHEL Units/ Offices/ townships and premises! Project Sites.
 - d. **Compensation in respect of each of the victims:**
 - i. In the event of death or permanent disability resulting from Loss of both limbs: Rs. 10,00,000/- (Rs. Ten Lakh)
 - ii. (ii) In the event of other permanent disability: Rs. 7,00,000/- (Rs. Seven Lakh)
 - e. **Permanent Disability:** A disablement that is classified as a permanent total disablement under the proviso to Section 2 (I) of the Employee's Compensation Act, 1923. "
2. In addition to above, contractor shall provide appropriate compensation to victims of major and fatal incidents as per Employee Compensation Act, 1923, ESIC Act, 1948 or as per any existing Acts and guidelines.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 90 of 162

18 INTERNAL & EXTERNAL HSE AUDITS

1. Subcontractor shall extend full co-operation and maintain necessary documents & records as required by Internal & External HSE Audit carried out by BHEL. / Third Party
2. All non-conformities and observations on HSE shall be disposed of-by subcontractor in a time bound manner as detailed in Audit Report.
3. All required corrective actions shall be taken by the subcontractor in order to avoid recurrence

19 OTHER REQUIREMENTS

1. In case of any delay in completion of a job due to mishaps attributable to lapses by the subcontractor, BHEL shall have the right to recover cost of such delay from the payments due to the subcontractor, after holding an appropriate enquiry and notifying the subcontractor suitably.

2. RISK & COST:

If the subcontractor fails to improve the standards of safety in its operation to the satisfaction of BHEL after being given reasonable opportunity to do so and/or if the subcontractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instruction regarding safety as per contractual requirements, BHEL shall have the right to take corrective steps at the risk and cost of the subcontractor after giving a notice of not less than 7 days indicating the steps that would be taken by BHEL.

3. If the subcontractor succeeds in carrying out its job in time without any fatal or disabling injury incident and without any damage to property BHEL may, at its sole discretion, favourably consider to reward the subcontractor suitably for the performance.
4. The subcontractor shall take all measures at all the sites of work to protect all persons from incidents and shall be bound to bear the expenses of every suit, action or other proceeding of law that may be brought by any persons for injury sustained, death or damage to environment



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 91 of 162

owing to neglect of the HSE precautions by the subcontractor; and shall be liable to pay any such persons such compensation, should such claim proceeding be filed against BHEL.

The subcontractor hereby agrees to indemnify BHEL against the same.

20 HSE REVIEW

BHEL shall hold HSE review meeting every month or as per requirement in order to discuss and resolve HSE issues of site and improve HSE performance. It will also discuss the incidents occurred since previous meeting, its root cause and Corrective action. The indicative agenda is given below:

1. Implementation of earlier MOM
2. HSE performance review
3. HSE inspection review w.r.t non-conformances observed and their status
4. HSE audit and CAPA
5. HSE training conducted and requirement
6. Health check-up camp
7. HSE planning for the erection and commissioning and installation activities in the coming month
8. HSE reward and promotional activities
9. HSE data analysis and improvement – Data analyzed will include non-conformances closed and pending, incident data, training data etc.

Subcontractor shall ensure presence of site in-charge, all package in-charges and safety officers, as communicated by BHEL in the meeting.

Subcontractor shall take requisite actions as per record notes and as decided in the meeting, in a time bound manner and submit compliance report to BHEL.



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-A)

Doc. No.: HSEP:14-
ER
Rev.: 00
Date:25.04.19
Page 92 of 162

21 FORMATS USED

This is minimum list of Formats to be used for reporting by the subcontractor. Other Formats are indicated in respective HSE Procedures, Work Permits, OCPs or as specified by BHEL. The medium of reporting can be hard / soft as indicated by BHEL.

BHEL can modify these Formats or introduce new Formats to the extent necessary to get the desired performance data of all HSE activities.

SN	Format Name	Format No.	Frequency of check	Rev
1	Work at Height Permit	HSEP:14-FP01	Before start of work and regularly thereafter as per Permit conditions	00
2	Hot Work Permit	HSEP:14-FP02		00
3	Confined Space Work Permit	HSEP:14-FP03		00
4	Excavation Work Permit	HSEP:14-FP04		00
5	Radiation Work Permit	HSEP:14-FP05		00
6	Lifting Activity Work Permit	HSEP:14-FP06		00
7	Lockout-Tagout Work Permit	HSEP:14-FP07		00
8	Inspection of First Aid Box	HSEP:14-F01	Weekly	00
9	Health Check Up	HSEP:14-F02	With new Induction & as per requirement thereafter	00
10	HSE Induction / Regular / On-the-Job Training	HSEP:14-F03	With new Induction & as per requirement thereafter	00
11	Tool Box Talk	HSEP:14-F04	Daily before job start	00
12	Site HSE Report	HSEP:14-F05	Monthly	00
13	PPE Inspection	HSEP:14-F06	Weekly	00
14	PPE Issue and Receipt	HSEP:14-F06A	With new Induction	
15	Inspection of T&Ps (General)	HSEP:14-F07	Monthly / As per requirement	00
16	Inspection of Cranes	HSEP:14-F08	Monthly / As per requirement	00
17	Inspection of Winches	HSEP:14-F09	Monthly / As per requirement	00
18	Inspection of Height Working	HSEP:14-F10	Daily / As per requirement	00
19	Inspection on Welding & Gas Cutting	HSEP:14-F11	Weekly / As per requirement	00
20	Inspection on Electrical Installation	HSEP:14-F12	Weekly / As per requirement	00
21	Inspection on Elevator	HSEP:14-F13	Weekly / As per requirement	00
22	HSE Penalty	HSEP:14-F14	-	00
23	Initial Verification of PPE's & Lifting Tools & Tackles	HSEP:14-F15	As and when new PPEs and T&Ps are received	00
24	Inspection of Labor Colony	HSEP:14-F16	Monthly / as per requirement	00
25	Recording of First Aid Injuries	HSEP:14-F17	As and when such injuries occur	00
26	E-waste Handled / Generated	HSEP:14-F18	Half Yearly	00
27	Hazardous Waste at the Facility	HSEP:14-F19	Half Yearly	00
28	HSE Checklist-cum-Compliance Report	HSEP:14-F20	As per Audit Calendar	00
29	Illumination Levels	HSEP:14-F21	Weekly / As per requirement	00
30	Incident Reporting	HSEP:14-F22	-	00
31	Incident Recording	HSEP:14-F23	-	00



HSEP:14-FP01

WORK AT HEIGHT PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1	All workers on job are competent and medically fit (No Height Phobia) for working at height		
2	Hazards in the vicinity are identified, controlled and communicated to the worker.		
3	Scaffolding soundness inspected is available for use with valid tag		
4	Work platform is not made of bamboo or weak material. Barricading is available with Top, Mid Rails and Toe Guard.		
5	Working platform is clean without any unwanted material. Floor openings are covered.		
6	Access and exit to workplace are safe, marked and without obstruction.		
7	Adequate lighting provided (for dark hours) as per applicable lux standards (Refer HSEP:13)		
8	Safety nets are provided below working area.		
9	Area below the working platform has been cleared of all activity		
10	Ladders have been secured, inspected and provided as per BHEL standard/contract.		
11	Horizontal life lines are provided to cater to design specification of 2300 kg per person.		
12	Safety harness with life line support/ fall arrester are checked and available in working condition		
13	Safety shoes (non-slip), Helmet with chin strip available with employees		
14	Visible Signboards provided on working platforms in workers' understandable language		
15	All lifting / tightening tools, hand tools/equipment checked and in good condition		
16	ELCB provided for Electrical connections individually. Electrical cable, welding Hose/Compressed air hose properly secured and laid down without obstruction. Earth resistance is OK.		
17	Crane / Winch / Hydra operator is qualified and experienced		
18	Emergency response team & Medical Facilities available. Work area is cordoned off.		
19	Job Safety Analysis Submitted		
20	Additional Permits to be taken (Please specify & attach):		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	
Signature:	
Name:	Designation:

Site Safety Officer (Sub-Contractor):	
Signature:	
Name:	Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	
Signature:	
Name:	Designation:

Site Safety Officer (BHEL):	
Signature:	
Name:	Designation:

Package-in-charge (BHEL):	
Signature:	
Name:	Designation:

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for working at height of 2 mtr. and above or above excavation of 2 mtr or deeper.
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day only after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work at height, height phobia needs to be ascertained and proper fitness certificate to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP02

HOT WORK PERMIT

Permit No. & Date

Project & Unit:

Emergency Contact Nos:

BHEL Sub-contractor:

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Welder is trained and qualified with good attendance in on-the-job training		
2.	Area ensured safe and free from all hazards (explosives etc.) with barricading and safe inlet / exit		
3.	Proper ventilation and lighting provided (in case of dark hours).		
4.	Gas hoses are in good condition and not cut / leaking		
5.	Pressure gauges/Flash back arrestor (at both ends) provided and in working condition.		
6.	Gas pressure in cylinder is within limits and hydraulic test certificate is available		
7.	Gas cylinders are stacked vertically and not below the welding / cutting area. Regulator key is available with cylinder. Gas cylinders covered with shields to prevent falling splinters.		
8.	Power supply to welding machine is through ELCB of 30 mA rating, which is tested and found ok; Earthing is tested and found OK		
9.	Welding machine input/output cables, welding holder and weld return clamp (Holder) are insulated and in good condition.		
10.	In case of welding in enclosed / confined spaces, the integrity of the structure and supports are ensured, Gas Testing done and evacuation system ensured in place		
11.	Emergency STOP buttons are in working condition. Welder /Helper knows how to operate it.		
12.	Welder & Fitter trained to connect ground/work return clamps (Holder) to work place prior to energization of welding machine.		
13.	Personal Protective equipment Minimum applicable: safety helmet, safety goggles, welding helmet, safety (rubber) shoes, leather gloves, long sleeve and nose mask -provided		
14.	In case of pits, water removed from the pit and wood/rubber insulation provided.		
15.	Safety signboards / cautions are in place.		
16.	Adequate and Suitable nos. of applicable firefighting extinguisher provided.		
17.	Nearby combustible material removed. Housekeeping done.		
18.	All workers explained about the hazards		
19.	First aid in attendance.		
20.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):
Signature:
Name: Designation:

Site Safety Officer (Sub-Contractor):
Signature:
Name: Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):
Signature:
Name: Designation:

Site Safety Officer (BHEL):
Signature:
Name: Designation:

Package-in-charge (BHEL):
Signature:
Name: Designation:

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Hot Work Permit No. & Date: _____

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all kinds of Hot Work eg. Welding, cutting etc..
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day only after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP03

CONFINED SPACE WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Has the equipment been Isolated from Power/Steam/Air?		
2.	Has the equipment been Isolated from liquid or gases?		
3.	Has the equipment been de-pressurized &/or drained?		
4.	Has the equipment been Blanked/blinded or disconnected?		
5.	Has the equipment been water flushed &/or steamed?		
6.	Whether man ways open and ventilated?		
7.	Whether constant Inert gas flow arranged?		
8.	Whether mechanically ventilated and adequately cooled?		
9.	Whether 24 V lighting provided inside the confined space?		
10.	Whether Radiation sources removed?		
11.	Whether training on confined space provided to the individual / group?		
12.	Whether required PPEs (hand gloves, goggles, face shield, ear plug/muff, protective clothing etc.) used?		
13.	Whether Safety harness and Lifeline used?		
14.	Whether Dust/Gas/Air Line mask used?		
15.	Whether attendant with SCBA/Air mask available?		
16.	Whether grounded air Exhaust/Blower/ AC provided?		
17.	Whether Personal Gas alarm provided?		
18.	Whether communication Equipment Provided?		
19.	Whether rescue equipment/team available?		
20.	Whether firefighting arrangement done		
21.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: *All the points mentioned in the above checklist have been checked and found OK***Permit Receiver:**

Site Engineer (Sub- Contractor):	Site Safety Officer (Sub-Contractor):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	Site Safety Officer (BHEL):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____
Package-in-charge (BHEL):	
Signature:	
Name: _____ Designation: _____	

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all confined space tasks, where injury can happen due to lack of oxygen, or chances of fire are there due to gas accumulation.
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP04

EXCAVATION WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1	Precautions taken for Underground Electrical Cable		
2	Precautions taken for Under / Above ground sewer/Drinking Water Line		
3	Precautions taken for Underground Telecommunication Line		
4	Precautions taken for Underground Product/Utility Line		
5	Precautions taken for Underground Fire Water Line		
6	Shoring / Shuttering / Sheet piling done to prevent collapse of excavation walls. Strength of Excavation wall ensured at all times		
7	Hard Barricading & Edge Protection provided		
8	Separate Safe Access for Man and Vehicle		
9	Lighting arrangement		
10	Banks Man Provided		
11	Required basic PPEs provided		
12	Slope Cutting/Benching Maintained		
13	Excavated soil / Construction Material / equipment kept away from the edge.		
14	First aid in attendance.		
15	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):
Signature:
Name: _____ Designation: _____

Site Safety Officer (Sub-Contractor):
Signature:
Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):
Signature:
Name: _____ Designation: _____

Site Safety Officer (BHEL):
Signature:
Name: _____ Designation: _____

Package-in-charge (BHEL):
Signature:
Name: _____ Designation: _____

Verified by Customer Representative (if applicable), Name: _____	Sign: _____	Date: _____	Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all excavation tasks 1.22 mtr or deeper
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP05

RADIATION WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	All the persons at the site informed/removed from the area.		
2.	Area around the source of radiation cordoned off with the rope/chord.		
3.	Radiation warning symbol/boards displayed around radiography work on rope/chord.		
4.	Radiographer worn radiation badges during testing and is within safe limits.		
5.	Radiography camera and carrying case box having radiation symbol.		
6.	Radiation Survey Meter is in working condition, calibrated & within validity period.		
7.	Radiographer has valid certificate from BARC.		
8.	Blinking light provided on road during radiography (in dark hours).		
9.	Proper required Illumination provided		
10.	Safe access and working platform provided to conduct RT work		
11.	All the persons involved in Radiography work are aware of the hazard of radiation		
12.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	
Signature:	
Name:	Designation:

Site Safety Officer (Sub-Contractor):	
Signature:	
Name:	Designation:

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	
Signature:	
Name:	Designation:

Site Safety Officer (BHEL):	
Signature:	
Name:	Designation:

Package-in-charge (BHEL):	
Signature:	
Name:	Designation:

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all activities in which there is danger of exposure to harmful radiation
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work must be clearly indicated by the permittee.
4	Terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy:
	Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.,



HSEP:14-FP06

LIFTING ACTIVITY WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

No.	Item	Yes	Not required / Remarks
1.	Crane used for lifting activity TPI tested, certified and approved for rated lifting		
2.	All lifting tackles, gears/appliances are tested and certified for lifting works.		
3.	Crane operator is trained and competent for lifting operation.		
4.	Lifting sling/ belt is protected against sharp edge of the jobs to be lifted.		
5.	Lifting hook is properly latched to prevent material falling over		
6.	Access and exit marked and without obstruction.		
7.	In case of lifting multiple materials at once, same are tied up with strong rope / material		
8.	Area below lifting activity barricaded to prevent movement		
9.	Minimum 2 guidelines have been provided for balancing and guiding jobs to be lifted.		
10.	Periphery area of crane booms as well as lifting job is barricaded and unauthorized/no-entry sign board posted.		
11.	Rigger and signal man is trained and competent for lifting work. Signal is clearly visible to the operator and understood		
12.	No lifting activity to be carried out during lightening, heavy wind/rain. No forecast of these conditions during work period		
13.	If scaffolding to be used during lift, scaffolding with valid tag available for use.		
14.	Add drawing /procedure etc. relevant for the lifting.		
15.	Any other Precautions or Permits required (Height Work, Confined Space etc.), give details and attach		

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	Site Safety Officer (Sub-Contractor):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	Site Safety Officer (BHEL):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____
Package-in-charge (BHEL):	
Signature:	
Name: _____	Designation: _____

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all Heavy Lifting Activities that are either / all of the following: 1. Above 50 Tons; 2. Tandem Lifting; 3. Total Load exceeding 75% of capacity of crane; 4. Lift of unusual difficulty or geometry or rigging; 5. Lift over operating Units; 6. Any other Lift as decided by Site HSE / Erection
2	Job Safety Analysis (JSA) to be created for every Lift above 5 Tons.
3	This permit must be available at the work site all the times of the work.
4	Location and description of the work, and terms applicable must be clearly indicated by the permittee.
5	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
6	Permit shall be issued for not more than 7 days including the issue date.
7	Permit shall be returned to the HSE Department of BHEL after completion of the job.
8	Before engaging anybody to work, competency and fitness to be ensured.
9	All safety precautions to be taken as per work site HSE plan.
10	Distribution of copy: Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.



HSEP:14-FP07

LOCKOUT/TAGOUT (LIVE ELECTRICAL MAINTENANCE) WORK PERMIT		Permit No. & Date
Project & Unit:		Emergency Contact Nos:
BHEL Sub-contractor:		

Exact Location of Work: _____

Nature / Description of Work: _____

Duration of Work Execution *: From Date: _____ to Date: _____ Daily from _____ hrs. to _____ hrs.

Name of Sub-Contractor Performing the Work: _____

Name of Sub-Contractor's Site Engineer (Permit Requesting Authority): _____ Sign: _____

Name of Sub-Contractor's Package In-charge: _____ Sign: _____ Date: _____

The above described work will be done under all the safety precautions mentioned as under during the currency of the Permit.

Tag No.	Device to be Tagged / Locked I.D. No.	Device Location	Device Position OPEN / CLOSED - ON/OFF	Lock No.	Tag Lock Placed by Name/Sign - Date/Time	Tag / Lock Removed by Name/Sign - Date/Time

Declaration: All the points mentioned in the above checklist have been checked and found OK**Permit Receiver:**

Site Engineer (Sub- Contractor):	Site Safety Officer (Sub-Contractor):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____

Permit Issuer:

Engineer of Concerned Execution Department (BHEL):	Site Safety Officer (BHEL):
Signature:	Signature:
Name: _____ Designation: _____	Name: _____ Designation: _____

Package-in-charge (BHEL):
Signature:
Name: _____ Designation: _____

Verified by Customer Representative (if applicable), Name: _____ Sign: _____ Date: _____ Time: _____

(* Permit valid for 7 days, subject to daily renewal, and extension as per overleaf instructions / record formats)

Daily Work Area Condition Endorsement

Sl. No.	Date	Signature with Date & Time		Remarks
		Agency Safety	BHEL Safety	
Day 2				
Day 3				
Day 4				
Day 5				
Day 6				
Day 7				

Permit Extension Beyond Initially Requested Hours

Sl. No.	Extension Period		Remarks	Signature with Date & Time			
	From..... (Date & Time)	To..... (Date & Time)		Agency Site Engineer	Agency Safety Officer	BHEL Site Engineer (PIA)	BHEL Safety Officer
1.							
2.							
3.							
4.							
5.							
6.							

TO BE SIGNED BY THE BHEL HSE & EXECUTION AFTER THE WORK IS OVER

Permit is here by returned after completing the job & ensuring safe removal of men and material.

Site Engineer, BHEL		Site HSE Engineer, BHEL	
Signature:		Signature:	
Name:		Name:	

General Instructions:

1	This Permit is required for all maintenance and erection activities with danger of electrocution from Live Electric Power
2	This permit must be available at the work site all the times of the work.
3	Location and description of the work, and terms applicable must be clearly indicated by the permittee.
4	This permit shall be endorsed each day after checking all the compliance jointly by the contractor and BHEL safety.
5	Permit shall be issued for not more than 7 days including the issue date.
6	Permit shall be returned to the HSE Department of BHEL after completion of the job.
7	Before engaging anybody to work, competency and fitness to be ensured.
8	All safety precautions to be taken as per work site HSE plan.
9	Distribution of copy: Original- Permittee, Duplicate –Department HOS, Contractor, Triplicate - Site HSE Dept.

**POWER SECTOR****Inspection of First Aid Box**FORMAT NO: **HSEP:14-F01**

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site :	
Name of Sub-Contractor:	
Inspected by :	
Date of Inspection:	

Number of employees in the site: - _____

Sl. No.	Item	No. Available	Remarks
1	No. of small sterilized dressings		
2	No of medium sized sterilized dressings		
3	No of large sized sterilized dressings.		
4	No of large sized sterilized burn dressings		
5	No of (15 grams) packets sterilized cotton wool		
6	No of pieces of sterilized eye pads in separate sealed packets.		
7	No of roller bandages 10 cm wide.		
8	No of roller bandages 5 cm wide.		
9	Whether tourniquet available		
10	Whether supply of suitable splints available.		
11	No of packets of safety pins.		
12	Whether kidney tray available		
13	Whether sufficient number of eye wash bottles, filled with distilled water or suitable liquid, clearly indicated by a distinctive sign which shall be visible at all times, available.		
14	Whether 4%-xylocaine eye drops, and boric acid eye drops and soda by carbonate eye drops available.		
15	Whether (60ml) bottle containing a two percent alcoholic solution of iodine available		
16	Whether (two hundred ml) bottle of mercurochrome (2 per cent) solution in water available.		
17	Whether 120ml bottle containing Sal volatile having the dose and mode of administration indicated on the label,		
18	Whether roll of adhesive plaster (6 cm X 1 meter) available		

**POWER SECTOR****Inspection of First Aid Box**

FORMAT NO: HSEP:14-F01

REV NO.: 00

PAGE NO. 01 OF 02

Sl. No.	Item	No. Available	Remarks
19	No of rolls of adhesive plaster (2 cm X 1 meter)		
20	Whether snake bite lancet available.		
21	Whether (30 grams) bottle of potassium permanganate crystals available.		
22	Whether a pair scissors available		
23	Whether copy of the First-Aid leaflet issued by the Director-General, Factory Advice service and labor Institutes, Government of India available.		
24	Whether bottle containing 100 tablets (each of 5 grains) of aspirin available		
25	Whether Ointment for burns available		
26	Whether bottle of a suitable surgical anti-septic solution available		
27	Whether List of Contents pasted on First Aid Box along with respective expiry dates		

Signature of Subcontractor's Site I/C

Date:

**POWER SECTOR****Health Check-Up**

FORMAT NO: HSEP:14-F02

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site :	
Name of Sub-Contractor:	
Name of Employee :	
Age:	

History Of Past Illness	H/O Epilepsy:
	H/O Drug Allergy:
	H/O Diabetics/ Hypertension:
	H/O Unconsciousness:
Personal History	

EXAMINATION**OBSERVATION****General Physical Examination**

Height		
Weight		
BMI		
Built And nourishment		
Pallor		
Temperature		
Chest Expansion	Inspiration	Expansion
Lymph Node Enlargement		
Upper Limbs Strength & Function		
Lower Limbs Strength & function		
Spine Adequately flexible for the job concerned (Yes/No)		
Mental alertness and stability with good eye, hand and foot co-ordination.		

Ear, Nose, Throat

Ear / Hearing	
Nose	
Throat	
<u>Vision</u>	
Left Eye	Right Eye

**POWER SECTOR****Health Check-Up**

FORMAT NO: HSEP:14-F02

REV NO.: 00

PAGE NO. 02 OF 02

EXAMINATION		OBSERVATION	
<u>Cardiovascular System Examination</u>			
Inspection			
Palpation	Pulse	BP	
Auscultation (Heart Sounds)			
<u>Respiratory System</u>			
Inspection	Respiratory Rate		
Palpation:			
Percussion			
Auscultation (Breath Sounds)			
<u>Examination of Abdomen</u>			
Inspection			
Palpation			
Auscultation (Bowel Sounds)			
Any Other			
Clinical Impression			

Signature of the examining doctor

Date:

**POWER SECTOR****HSE Induction / Regular / On-the-Job
Training Records**

FORMAT NO: HSEP:14-F03

REV NO.: 02

PAGE NO. 01 OF 01

Name of Site :					
Name of Sub-Contractor :					
Date of Training (dd/mm/yyyy) :		Duration (Hrs)			
		From		To	
Name & Details of Trainer:					
Subject of Training	Induction		On-The-Job Training (Give details)		
Name of Training Co-ordinator:					

Sl. No.	Name	Designation	Organization	Signature

I certify that Training has been carried out as per HSEP04: HSE Procedure for Training & Awareness

Signature of Training Coordinator

Date:

**POWER SECTOR****Toolbox Talk**

FORMAT NO: HSEP:14-F04

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Sub-Contractors Name :	
Date :	

Topic	Name of person delivered Tool Box Talk	No. of Participants attended	Remarks

Signature of Site I/C of Subcontractor

Date:

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 01 of 6

Name of subcontractor:	Report Month:

A) Accidents/Incidents Details: -

a	Lost time in Accidents	No. of incidents	Man Hours Lost	No. of People Involved	No. of person reported to Govt.	
	For the Month					
	Cumulative					
b	Minor Injuries					
	For the Month					
	Cumulative					
c	Fires	No. of Near-Misses	No. of First- Aid cases	No. of persons injured	No. of equipment damaged	No. of Fire reported Outside
	For the Month					
	Cumulative					
d	Other mishaps not covered in a, b, c.	No. of Near-Misses	No. of First- Aid cases	No. of persons injured	No. of equipment damaged	Total near misses and First-Aid
	For the Month					
	Cumulative					

B) Data for Man-hours worked:

Details	Value	Remarks if any
No. of people		
Man Hours worked		
O.T. Hours		
Total Man Hours		
Grand Total of man hours worked during the month(A+B)		
Cumulative man-hours (from _____ to _____):		
(Since commencing of operations)		

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 02 of 6

C) Status of Deployment of Work force, Safety Officers/Supervisors & Construction Medical Officer(s) & Electricians:

Description	Name	Qualification & Experience
Safety Officers		
Safety Supervisors		
Construction Medical Officer		
Nursing Staff.		
Electricians		
Scaffolding Inspectors		
T&P Inspectors		

D) Status of deployment of manpower for critical HSE activities:

(All height work and other hazardous activities to be actively supervised by trained personnel. Area to be divided in manageable sections to ensure effective supervision at all times. For example, multiple elevations in a structure can be divided among multiple supervisors)

Activity	Location	Shift Timings	Personnel deployed	Remarks
Height Work	Boiler Unit- (Level 1-3)			
	Boiler Unit- (Level 4-6)			
	ESP			
Housekeeping	Boiler Unit-			
	ESP Unit			
Others				

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 03 of 6

E) Lifting Tools, Tackles, Equipment and Pressure Vessels:

Item	Nos. Deployed	Nos. Tested by competent person	Identification Nos. (Comma separated) (A)	Validities of Test Certificates (Comma separated – corresponding to column A)	Whether internal testing using Color Coding or similar system done
Winches					
Chain Blocks					
Wire Rope Slings					
Man Cages					
D-Shackles					
Air Compressors					
Crawler Cranes					
Mobile Cranes					
Hydra Cranes					
Hydraulic Jack					
Others					

F) Reverse Horns in Construction Vehicles:

Item	Nos. Deployed with serial numbers (Comma separated) (A)	Nos. Having Functional reverse horns	Inspection Dates (Comma separated corresponding to column A)
Transit Mixers			
Hydra Cranes			
Dumpers/Trippers			
Backhoes			
Other Vehicles			

G) ELCBs:

No. Of ELCBs provided with Serial Nos. (Comma separated) (A)	Nos. Functional	When They were last Tested (Comma separated corresponding to column A)

H) Electrical Earthing:

No. Of Earth resources with serial numbers and locations (Comma separated) (A)	Whether Double Earthing provided to all equipment	When they were last tested (Comma separated corresponding to column A)

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 04 of 6

I) Fire Extinguishers

Name & designation of person responsible for maintenance of Extinguishers at different locations : (Individual subcontractor's Safety Officers).

A. FIRE EXTINGUISHERS AT ERECTION SITE:

Type (Add more rows if required)	Sizes	Qty + Serial numbers (Comma separated) (A)	Healthiness – Last checked dates (Comma separated corresponding to column A)	Locations (Comma separated corresponding to column A)
FOAM TYPE				
SODA TYPE				
DRY TYPE (DCP)				
CO2 TYPE				

B. FIRE EXTINGUISHERS AT SITE OFFICES & STORES:

Type	Size (Add more rows if required)	Qty + Serial numbers (Comma separated) (A)	Healthiness – Last checked dates (Comma separated corresponding to column A)	Locations (Comma separated corresponding to column A)
FOAM TYPE				
SODA TYPE				
DRY TYPE (DCP)				
CO2 TYPE				

J) Tie-Ups with Emergency Services

Service (Add more rows if required)	Name, location & distance from site	Emergency contact details	Remarks
Hospital with ICU and facilities for orthopedic, neurological etc. trauma			
Fire services			
Others:			

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 05 of 6

K) Implementation of Checklist, Work Permits:

Item	Numbers During the Month	Major Deviations

Note:- Please attach photocopies of all filled Checklists & Work permits for that month.

L) Personal Protective Equipment Issued (Extend table for each subcontractor):

Item	Issued this Month	Nos. Issued up to the Month	Percentage of usage at Site (as per physical verification)
Name of subcontractor:			
Safety Helmet			
Safety Shoes			
Full Body Harness			
Fall Arrestor			
Safety Nets			
Hand Gloves			
Face shield			
Welder shield			
Nose Mask			
Reflective Jacket			
Other PPEs.			

M) Safety Observations by Subcontractor Executives- Observations package wise:

Topic	Date Of Programme	No. Of Participants	Level Of Participants

• Tool-Box talks on Safety:

Date	Tool Box Talk - No of Participants	Topic	Remarks

• Safety Induction Trainings:

Date	Safety Induction No. of Participants	Topic	Remarks

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Monthly Site HSE Report**

FORMAT NO: HSEP:14-F05

REV NO.: 00

Page 06 of 6

N) Progress of Management Programmes at Site

SL	Description Of MPs	Annual Plan	Achievement In This Month	Cumulative Achievement
A. Environment Improvement Programme				
1	Plantation of Trees			
2	Installation of Scrap Bins			
3	Chemical Storage & Handling system			
B. Improvement of Working Environment				
4	Increasing LTI free days			
5	Air Quality Monitoring			
6	Water Quality Monitoring			
7	Illumination level Monitoring			

O) HR Information:

Designation	Total No. Inducted	Total no. of Induction Balance	Total no. of Gate Pass Issued	Total no. of Gate Pass Balance	Total no. of Gate Pass Cancelled	Medical Checkup Completed	Medical Checkup Balance

P) Rewards on Account of Good Safety Performance

Serial Number	Reward Issued to	Details of Reward Issued (Amount etc.)	Brief Reason

Note: Photos of Reward Functions to be attached

Q) Other Safety initiatives / Safety Activities conducted (with photos, if any):

Signature of Subcontractor Site In-charge

Signature of Subcontractor HSE Officer

**POWER SECTOR****Personal Protective Equipment Inspection**

FORMAT NO: HSEP:14-F06

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Item	Total Checked	Numbers Found in Order	Remarks
Safety Helmet			
Safety Shoes			
Full Body Harness			
Fall Arrestor			
Safety Nets			
Hand Gloves			
Face shield			
Welder shield			
Nose Mask			
Reflective Jacket			
Other PPEs (Specify)			

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection Of T&Ps**FORMAT NO: **HSEP:14-F07**

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Date of Inspection :	

Sl.No.	Description	Remarks
1.0	Name of equipment	
2.0	Basic Information of equipment	
2.1	Specification	
2.2	Sr. No. of equipment	
2.3	Make	
2.4	Year of manufacture	
3.0	Major repairs / overhauls(Furnish details of work carried out)	Date(s) of major repair/overhaul
3.1		
3.2		
3.3	Repairs carried out at site	
4.0	Any performance test conducted	Yes/No
5.0	Document Submitted	Yes/No
6.0	Manufacturer's test / guarantee certificate	Available/ Not available
7.0	Performance test	Done/ Not Done
8.0	Acceptance Norms	
9.0	Committee Observations	
10.0	Date of next review (if accepted)	
Signature-Subcontractor HSE Officer		Signature-Subcontractor Site In-charge

**POWER SECTOR****Inspection Of Cranes**

FORMAT NO: HSEP:14-F08

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :**Name of Sub-Contractor :****Inspected by :****Date of Inspection:****Crane Reg. No (Make/Model)****Name of Driver/Operator**

Sl.no.	Description	Observation	Measures
1	Valid Driving license		
2	Hook & Hook Latch		
3	Over Hoist limit switch		
4	Boom limit switch		
5	Boom Angle Indicator		
6	Boom limit cutoff switch		
7	Condition of Boom		
8	Condition of ropes		
9	Number of load lines		
10	Size and condition of the slings		
11	Stability of the cranes		
12	Soil Condition		
13	Swing Break And Lock		
14	Proper Break And Lock		
15	Hoist Break And Lock		
16	Boom Break And Lock		
17	Main Clutch		
18	Leakage in Hydraulic Cylinders		
19	Out riggers fully extendable		
20	Tyre pressure		
21	Condition of Battery And Lamps		
22	Guards of moving and rotating parts		
23	Load chart provided		
24	Number and position of pedant ropes		
25	Reverse Horn		
26	Load Test Details		
27	Operator's fitness		
28	Pollution under control certificate		
29	Fire extinguisher of appropriate type.		
30	Training of the operator		

Signature of Site I/C of Subcontractor:**Date:**

**POWER SECTOR****Inspection Of Winches**

FORMAT NO: HSEP:14-F09

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Winch Reg. No (Make/Model) _____

Name of Operator _____

Sl. No.	Description	YES	NO	NA	Remarks
1	Has the copy of Third Party Inspection certificate been provided in winch machine shed?				
2	Is safe operating instructions displayed near winch?				
3	Is winch machine operator experienced enough to operate the winch machine?				
4	Is the winch machine operated by someone other than the winch machine operator?				
5	Is there guard provided in all moving parts like wheel and motor’s shaft?				
6	Will it protect against unforeseen operational contingencies?				
7	Are brakes, clutch and locking arrangement working properly?				
8	Has it been ensured that the guard does not constitute a hazard by itself?				
9	Are the cranks and the connecting rods protected by guardrails?				
10	Is there provision for fully covered shed with wooden plank roof?				
11	Is wire rope free from any kind of damage or wear and tear?				
12	Is split pin provided for the protection of clutch and brake locking arrangement?				
13	Is pulley inspected by competent person and certified before use?				
14	Is pulley free from any wear and tear visually?				
15	Is winch rope barricaded with clipsheet for the protection of rope and person?				
16	Is the wire rope lubricated by cardium oil?				
17	Is there any friction in wire rope which may damage the wire rope rather than the rolling parts?				
18	Is there any oil leakage in the hydraulic system of the winch machine?				
19	Has it been ensured that the guard will not cause discomfort or inconvenience to operator?				
Total NO		Total NA		% Compliance	

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection of Height Working**

FORMAT NO: HSEP:14-F10

REV NO.: 00

PAGE NO. 01 OF 2

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection:	

Sl. No.	Descriptions	Observation (Yes/No)	Remarks
A. General			
1	All the workers have been explained safe work method?		
2	Adequate illumination has been ensured.		
3	Work area inspected prior to the start of the work.		
4	Is the work area barricaded to prevent fall and platforms are of adequate strength (bamboo, jute / plastic ropes not to be used).		
5	The temporary work platforms & structures for height work including those used in Boiler structures, water walls, ESP, Powerhouse are fully barricaded with railings (as per IS 3696)		
6	Fabricated makeshift arrangements are checked for quality and type of material welding, anchoring etc.		
7	Are floor gaps, permanently covered and barricaded		
8	Area below the work place barricaded, particularly below hot work.		
9	Workers provided with bags /box to carry bolts, nuts and hand tools		
10	Arrangement for fastening hand tools made.		
11	All work platforms ensured to be of adequate strength and ergonomically suitable.		
12	Work at more than one elevation at the same segment is restricted.		
13	An established communication system has been established and explained to the workers.		
B. Access/Egress			
1	Walkways provided with handrail, mid-rail and toe guard?		
2	All checkered plates, gratings properly welded/ bolted?		
3	Are ladders inspected and they are in good condition?		
4	Are ladders spliced?		
5	Are ladders properly secured to prevent slipping, sliding or falling?		
6	Stairs erected above and below 1 tier column for safe access?		
7	Do side rails extend 36" above top landing?		

**POWER SECTOR****Inspection of Height Working**

FORMAT NO: HSEP:14-F10

REV NO.: 00

PAGE NO. 02 OF 2

Sl. No.	Descriptions	Observation (Yes/No)	Remarks
8	Are built up ladders constructed of sound materials?		
9	Are rugs and cleats not over 12" on center?		
10	Metal ladders not used around electrical hazards.		
11	Proper maintenance and storage.		
12	Ladders placed at right slope.		
13	Ladders / staircases welded/ bolted properly.		
14	Any obstruction in the stairs.		
15	Are landing provided with handrails, knee rails, toe boards etc.?		
16	Whether ramp is provided with proper slope.		
17	Proper hand rails / guards provided in ramps.		
C. Housekeeping			
1	Walkways, aisles & all overhead workplaces cleared of loose material.		
2	Is any nut bolt/scrap left on beam/column?		
3	Flammable materials, if any, are cleared.		
4	All the de shuttering materials are removed after de shuttering is done.		
5	Platforms and walkways free from oil/grease or other slippery material.		
6	Collected scrap are brought down or lowered down and not dropped from height.		
D. PPE And Safety Devices			
1	Use of safety helmet, safety belts ensured for all workers		
2	Anchoring points provided at all places of work.		
3	Common lifeline provided wherever linear movement at height is required.		
4	Safety nets are use wherever required.		
5	Proper fall arrest system is deployed at critical workplaces.		
6	Crawler boards/Safety system or works on fragile roof are used.		
7	Is man-lift being used for personnel lifting?		
8	Does man basket / personnel lift system has an independent lifeline and all occupants safety harnesses connected to it with rope grab?		

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR**FORMAT NO: HSEP:14-F11
REV NO.: 00
PAGE NO. 01 OF 02**Inspection of Welding and Gas Cutting**

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Welding				
Sl.no.	Description	Y e s	N o	Remarks
1	Is electric connection given through 30 mA ELCB/RCCB to welding m/c?			
2	Is welding machine more than 10 years old?			
3	Is there provision of fuse and is it bypassed?			
4	Is electric cable fitted properly in junction box on m/c?			
5	Is electrical cable free from joints?			
6	Are the joints attached firmly & insulated with tape?			
7	Is double earthing given to body of m/c?			
8	Is the physical condition of the m/c good?			
9	Is ON/OFF switch connected to the m/c is working and in good condition?			
10	Are indication lamps on m/c working?			
11	Is the electrode holder in good condition?			
12	Are the cables of the welding m/c lugged & tight properly?			
13	Is cable to welding machine terminal joint loose / burnt / glowing?			
14	Are return lead connected properly (Rod, Angle, Channels shall not be used)			
	Total No of NO			
	Total No of YES			

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection of Welding and Gas Cutting**FORMAT NO: **HSEP:14-F11**

REV NO.: 00

PAGE NO. 02 OF 02

Gas Cutting				
Sl.no	Description	Yes	No	Remarks
1	Are Cylinders kept on trolleys?			
2	Physical condition of Gas cylinders Good?			
3	Is there Oil/Grease on valve of the cylinder?			
4	Are pressure regulators in good condition?			
5	Condition of hose pipe OK?			
6	Are hose pipe clamped with hose clip?			
7	Is flash back arrestor & NRV fitted on torch both for O2 and LPG cylinder?			
8	Is nozzle of the torch cleaned?			
	Total Number of NO			
	Total No of YES			
	% Compliance			

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection Of Electrical Installation**

FORMAT NO: HSEP:14-F12

REV NO.: 00

PAGE NO. 01 OF 02

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Sr. No.	Contents	Yes/No	Remarks
A	Cable		
1.	Whether the condition of cable is checked?		
2.	Are cables received from other sites checked for insulation resistance before putting them into use?		
3.	Are all main cables taken either underground / overhead?		
4.	Are welding cables routed properly above the ground?		
5.	Are welding and electrical cables overlapping?		
6.	Is any improper joining of cables/wires prevailing at site?		
B	DBs/SDBs		
1.	Is earth conductor continued up to DB / SDB?		
2.	Whether DBs and extension boards are protected from rain / water?		
3.	Whether DB and extension board have separate MCB/ELCB		
4.	Is there any overloading of DBs / SDBs?		
5.	Are correct / proper fuses & CBs provided at main boards and sub-boards?		
6.	Is energized wiring in junction boxes, CB panels & similar places covered all times?		
C	ELCB		
1.	Whether the connections to all equipment are routed through individual ELCBs?		
2.	Is sensitivity of each ELCB maintained at 30 mA?		

**POWER SECTOR****INSPECTION OF ELECTRICAL INSTALLATION**

FORMAT NO: HSEP:14-F12

REV NO.: 00

PAGE NO. 02 OF 02

Sr. No.	Contents	Yes/No	Remarks
3.	Are the ELCB numbered and tested periodically & test results recorded in a logbook countersigned by a competent person?		
D	Grounding		
1.	Is natural earthing ensured at the source of power (main DB at Generator or Transformer)?		
2.	Whether the continuity and tightness of the earth conductor are checked?		
3.	Mention the gauge of the earth conductor used at the site.		
4.	Mention the value of Earth Resistance.		
E	Electrically operated Machines or Accessories.		
1.	Whether the plug top is provided everywhere.		
2.	Are all metal parts of electrical equipment and light fittings / accessories grounded / double earthed?		
3.	Is there any shed or cover for welding machines?		
4.	Are halogen lamps fixed at proper places?		
5.	Are portable power tools maintained as per norms?		
6.	Any other information:		

Signature of Site I/C of Subcontractor:

Date:

**POWER SECTOR****Inspection of Elevator**

FORMAT NO: HSEP:14-F13

REV NO.: 00

PAGE NO. 01 OF 01

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

Sr. No.	Description	Remarks
1.0	Name of equipment	
2.0	Basic Information of equipment	
2.1	Specification	
2.2	Sr. No. of equipment	
2.3	Make	
2.4	Year of manufacture	
3.0	Major repairs/overhauls(Furnish details of work carried out)	Date(s) of major repair/overhaul
3.1		
3.2		
3.3	Repairs carried out at site	
4.0	Any performance test conducted	Yes/No
5.0	Document Submitted	Yes/No
6.0	Manufacturer's test / guarantee certificate	Available/ Not available
7.0	Performance test	Done/ Not Done
8.0	Acceptance Norms	
9.0	Committee Observations	
10.0	Date of next review (if accepted)	

Signature-Subcontractor/ Subcontractor's Safety Officer

Signature-Site Safety Officer (BHEL)

**POWER SECTOR****HSE Penalty Format**

FORMAT NO: HSEP:14-F14

REV NO.: 00

PAGE NO. 01 OF 2

Sub: MEMO for Penalty for non-compliances in Safety and Fabrication Quality requirement

Following lapse (tick marked) was observed and penalty is imposed as stated at the bottom of this memo. It is requested that such occurrences may please be avoided in future.

S. No	Nature of Non - Compliance	Penalty (in Rs.)	Remarks
A. PPEs			
1.	Not wearing safety helmet / wearing without chin straps	500	Per Person/ day
2.	Not Wearing safety shoes	500	Per Person/ day
3.	Not wearing gloves, nose masks where required	350	Per Person/ day
4.	Not using grinding goggles while doing grinding operations	500	Per Person/ day
B. Height Work			
1.	Not providing Lifelines for height work	1000	Per location per day
2.	Not ensuring barricading of working platforms	1000	Per location per day
3.	Not using temporary platform during work at height	1000	Per case per day
4.	Not wearing safety belt while working at height (> 2 meters) or not anchoring to lifeline	2000	Per Person/ day
5.	Not providing proper barricades (caution tape at 2 elevations)	500	Per location per day
	Use of mobile phones by Height worker / Crane / Hydra Operator	1000	Per case per day
C. Electrical			
1.	Not using 24 V supply for lighting in confined spaces	500	Per case per day
2.	Lack of Electrical Earthing	2000	Per case per day
3.	Improper earthing of welding & Other electrical Machines. Earth resistance not OK	500	Per Machine per incidence
4.	Electrical plug not used for connection/ hand machines	500	Per connection per incidence
5.	Unsafe electrical practice like not installing ELCB/ RCCB	500	Per case per day
6.	Using frayed/ broken welding cables	500	Per machine per week
D. Lifting			
1.	Use of lifting equipment without having valid Third Party Test certificate	5000	Per equipment per seven days
2.	Lifting hooks without latches	500	Per hook per day
3.	Using damaged slings or not slinging properly	2000	Per event Per T&P
4.	Lifting cylinders without cage or rolling of cylinders	500	Per Event per incidence
5.	Non removal of scrap from platforms	1000	Per Event Per location per 7 days
E. Hot Work / Cylinder Handling			
20.	Gas cutting without flash back arrestor	2000	Per machine per incidence
21.	Gas cutting at height without sheet below	500	Per event
22.	Not keeping gas cylinders vertically / in trolley on ground	500	Per event
23.	Gas cutting with damaged hose pipes	500	Per event
	Not covering welding cylinder with top cover	500	Per event
F. Construction Vehicles			
24.	Not having valid driving license for the type of vehicle/ T&P	2000	Per driver per event
25.	Two wheeler entry in construction area	500	Per vehicle
26.	Using Hydra for material movement at site in unsafe manner	1000	Per case
27.	Using Two Hydra in Tandem for material movement	2000	Per case
28.	Vehicles, Hydras, Cranes, Dumpers and Earth Movers not having automatic back horns linked to gear	1000	Per Equipment per day
29.	Not using guide rope while moving material using Hydra or Crane	1000	Per event
30.	Violating speed limit during vehicle movement	1000	Per event

	POWER SECTOR	FORMAT NO: HSEP:14-F14 REV NO.: 00 PAGE NO. 02 OF 2
	HSE Penalty Format	

	Nature of Non - Compliance	Penalty in Rs.)	Remarks
Engineering / Administrative Controls / General			
31.	Major Accident – Victim not reporting for work within 48 hours – resulting in partial loss in earning capacity & termination / demotion in employment	200000	
32.	Fatal Accident/Accidents Resulting in total Loss in Earning Capacity #	500000	Per victim#
33.	Unsafe Act in violation of standards / clauses of this document	500-5000	Per case
34.	Activity carried out without safety work permit where applicable	2000	Per person per event
35.	Using untrained / unqualified personnel for hazardous work	2000	Per event
36.	Not maintaining proper hygiene in canteen as per BOCW	1000	Per event

or as deducted by customer, whichever is higher.

For repeated **major and** fatal incidents under the same subcontractor for the same package in the same Unit, the subcontractor will pay 2 times the penalty compared to previously paid

Details (if any) related to non- compliance (Name of persons, Nature of deficiency, etc.)

Penalty imposed:

1, Rate as per above chart _____

2. No. of Persons/ machine/ event/ labor _____

3. Total Penalty= 1. X 2. = _____

BHEL Personnel:

Signatures:

Name _____

Attachments: Photographs & Documentary proof (if available) for violation

Distribution: 1 Copy: to Sub- contractor Site In-charge,
1 Copy to Site Construction Manager (BHEL)

**POWER SECTOR****Format for Initial Verification of PPE's & Lifting Tools & Tackles**

FORMAT NO: HSEP:14-F15

REV NO.: 00

PAGE NO. 01 OF 1

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

S. No	Particulars (Serial Number, make, model of PPE, T&P)	Accepted / Rejected	Remarks
Checked (Name & Sign. Of Subcontractor HSE Officer)		Verified (Name & Sign. Of Subcontractor Site In-charge)	

**POWER SECTOR****Format for Inspection of Labor Colony**

FORMAT NO: HSEP:14-F16

REV NO.: 00

PAGE NO. 01 OF 1

Name of Site :	
Name of Sub-Contractor :	
Inspected by :	
Date of Inspection :	

S. No	Particulars	No	Yes	Comments
1	Sufficient living space ensured for each occupant with Kitchen area			
2	Area cleanliness ensured through regular cleaning			
3	Toilet facility sufficient for all occupants available, in order with adequate lighting, cleaned regularly and in hygienic condition			
4	Washing facilities available with adequate water supply			
5	Availability of sufficient drinking water in protected tanks with weekly tank cleaning and source tested annually as per IS10500 ensured			
6	Adequate drainage to remove waste and rain water, no flooding			
7	"Unsafe for Drinking" posted near accessible non-potable water and sources; posted in language of occupants or universal symbol			
8	Prevention of mosquitoes, flies, and rodents in immediate housing area through insecticide sprays if required			
9	Electricity provided & electrical connections safety ensured			
10	Fans, Coolers / Quilts, Heaters provided as required to cater to weather conditions along with adequate electricity supply			
11	Houses Walls and roof tight and solid; floors rigid and durable, with smooth, cleanable finish in good repair			
12	Availability of nominal rate ration / common use items shop within / nearby the colony			
13	Emergency medical plan developed: (A) Potential injuries determined (B) Local EMS response determined (C) Qualified first-aid person on site, if required			
14	Emergency plans posted where employees gather			
15	Transportation to nearest suitable facility			

Any other checks:

Remarks:	Name & Sign. Of Subcontractor HSE Officer			



POWER SECTOR

FORMAT NO: HSEP:14-F17

REV NO.: 00

PAGE NO. 01 OF 1

Format for Recording of First Aid Injuries

Name of Site:

Name of Subcontractor:

[illegible]

**POWER SECTOR****Format for Maintaining Records of E-waste
Handled / Generated**

FORMAT NO: HSEP:14-F18

REV NO.: 00

PAGE NO. 01 OF 1

(Generated Quantity in Metric Tons (MT) per year)

Site		
Subcontractor		
Date		
Types & Quantity of e-waste handled/generated**	Category	Quantity
	Item Description	
Types & Quantity of e-waste stored	Category	Quantity
	Item Description	
Types & Quantity of e-waste sent to collection center authorized by producer/dismantler/recycler/refurbisher or authorized dismantler/ recycler or refurbisher **	Category	Quantity
	Item Description	
Types & Quantity of e-waste transported*	Category	Quantity
	Item Description	
Name, address and contact details of the destination		
Types & Quantity of e-waste refurbished*	Category	Quantity
	Item Description	
Name, address and contact details of the destination of refurbished materials		
Types & Quantity of e-waste dismantled*	Category	Quantity
Name, address and contact details of the destination		
Types & Quantity of e-waste recycled*	Category	Quantity
Types & Quantity of materials recovered	Item Description	
	Quantity	
Name, address and contact details of the destination		
Types & Quantity of e-waste sent to recyclers by dismantlers	Category	Quantity
	Item Description	
Name, address and contact details of the destination		
Types and Quantity of other waste sent to respective recyclers by dismantlers / recyclers of e-waste	Category	Quantity
	Item Description	
Types and Quantity of e-waste treated & disposed	Category	Quantity
	Item Description	
Name, address and contact details of the destination		

Signature of Subcontractor Site In-charge:**Date**

**POWER SECTOR****Format for Maintaining Records of Hazardous Waste at the Facility**

FORMAT NO: HSEP:14-F19

REV NO.: 00

PAGE NO. 01 OF 1

1. Name of Site:
2. Name of the Subcontractor:
3. Date:
4. Description of hazardous waste:

Physical form with description	Chemical form	Total volume and weight (in kg.)

5. Description of storage and treatment of hazardous waste:

Date	Method of storage of hazardous wastes	Date	Method of treatment of hazardous wastes

6. Details of transportation of hazardous waste:

Name & address of consignee of package	Mode of packing/of the waste for transportation	Mode of transportation to site of disposal	Date of transportation

7. Details of disposal of hazardous waste:

Date of disposal	Concentration of hazardous material in the final waste form	Site of disposal (identify the location on the relevant layout drawing for reference)	Method of disposal	Persons involved in disposal

8. Data of environmental surveillance:

Date of measurement	Analysis of ground water			Analysis of soil samples			Analysis of air sampling			Analysis of any other samples (give details)
	Location of sampling	Depth of sampling	Data	Location of sampling	Depth of sampling	Data	Location of sampling	Data		

9. Details of the hazardous wastes reused and recycled:

Date	Total quantity of hazardous waste generated	Details of hazardous waste minimization activity	Material received	Final quantity of waste generated	Net reduction in waste generation quantity and percentage

Signature of Subcontractor Site In-charge:

Date:

**POWER SECTOR****HSE Audit / Inspection Checklist-cum-Compliance Report**

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 01 OF 3

PROJECT: _____

CONTRACTOR: _____

DATE: _____

OWNER : _____

INSPECTION BY: _____

Note : write 'NA' wherever the items is not applicable

Item	Y e s	N o	Remarks	Action
HOUSEKEEPING				
Waste containers provided and used				
Passageways and walkways clear				
General neatness of working area				
Other				
PERSONNEL PROTECTIVE EQUIPMENT				
Goggles; shields				
Face protection				
Hearing protection				
Respiratory masks etc.				
Safety belts				
Other				
EXCAVATIONS / OPENINGS				
Openings properly covered or barricaded				
Excavations shored				
Excavations barricaded				
Overnight lighting provided				
Other				
WELDING, CUTTING				
Gas cylinders chained upright				
Cable and hoses not obstructing				
Fire extinguisher (s) accessible				
Others				
SCAFFOLDING				
Fully decked platforms				
Guard and intermediate rails in place				
Toe boards in place				
Adequate shoring				
Adequate access				
Others				
LADDER				
Extension side rails 1 m above				
Top of landing				
Properly secured				
Angle + 70° from horizontal				
Other				



POWER SECTOR

HSE Checklist-cum-Compliance Report

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 02 OF 3

HOISTS, CRANES AND DERRICKS				
Condition of cables and sheaf OK				
Condition of slings, chains, hooks OK				
Inspection & maintenance log maintained				
Outriggers used				
Signals observed and understood				
Qualified operators				
Others				
MACHINERY, TOOLS & EQUIPMENT				
Proper instruction				
Safety devices				
Proper cords				
Inspection and maintenance				
Other				
VEHICLE AND TRAFFIC				
Rules and regulations observed				
Inspection and maintenance				
Licensed drivers				
Other				
TEMPORARY FACILITIES				
Emergency instructions posted				
Fire extinguishers provided				
Fire-aid equipment available				
General neatness				
Others				
FIRE PREVENTION				
Personnel instructed				
Fire extinguishers checked				
No smoking in prohibited areas.				
Hydrants				
Clearance				
Others				
ELECTRICAL				
Proper wiring				
ELCB's provided				
Ground fault circuit interrupters				
Protection against damage				
Prevention of tripping hazards				
Other				
HANDLING & STORAGE OF MATERIALS				
Properly stored or stacked				
Passageways clear				
Other				
FLAMMABLE GASES AND LIQUIDS				
Containers clearly identified				
Proper storage				
Fire extinguisher nearby				
Other				

**POWER SECTOR****HSE Checklist-cum-Compliance Report**

FORMAT NO: HSEP:14-F20

REV NO.: 00

PAGE NO. 03 OF 3

WORKING AT HEIGHT				
Safety nets				
Safety belts				
Safety helmets				
Anchoring of safety belt to the life line rope				
ENVIRONMENT				
Lubricant waste/engine oils properly dispose.				
Waste from Canteen, offices, sanitation etc. disposed properly.				
Disposal of surplus earth, stripping materials, expired batteries, oily rags and combustible materials done properly.				
HEALTH CHECKS				
Hygienic conditions at labor camps O.K.				
Availability of first-aid facilities				
Proper sanitation at site, office & labor camps.				
Arrangement of medical facilities.				
Measures for dealing with illness.				
Availability of potable drinking water for workmen & staff.				
Provision of crèches for children.				

Signature of Subcontractor Site In-charge:

Date:

**POWER SECTOR****Format for Inspection of Illumination / Lux Levels**

FORMAT NO: HSEP:14-F21

REV NO.: 00

PAGE NO. 01 OF 1

Name of Site :					
Name of Sub-Contractor :					
Inspected by :					
Date of Inspection :					
Details of Lux Meter Used for Illumination Checking					
Serial Number		Last inspection Date		Inspection Due Date	
S. No	Location	Applicable Lux Value	Measured Lux Value	Comments	
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
Any other checks:					
Remarks:		Name & Sign. Of Subcontractor HSE Officer			

**POWER SECTOR****Format for Incident Reporting**

FORMAT NO: HSEP:14-F22

REV NO.: 00

PAGE NO. 01 OF 2

Type of incident: Fatal/Major//Fire/Property damage (Tick what is applicable)

1	Name Of Site		3	Activity Area	
2	Scope Of Work		4	Name Of Contractor	
			5	NAME & DESIGNATION OF BHEL ACTIVITY I/C	
6	Date & Time Of Accident		7	Date Resumed	
8	No. Of Work-Days Lost by Victim (If Duty Not Resumed, Give Estimated Figure)				
9	No. Of Man-hours Lost By Others				
10	Personal Details Of Injured and/or Details Of Materials/Equipment/ Property Damaged				
Name			Name Of Material / Equipment / Property		
Period Of Employment					
Age	Yrs.	Sex	Male/Female	Estimated Cost	Actual Cost
Marital Status		Single/ Married			
Occupation				Nature Of Damage	
Part Of Body Injured					
Nature Of Injury					
Agency (Object / Equipment / Substance) Most Responsible For Causing Accident / Injury / Damage					
12	Person (Name & Designation) With Most Control Over Agency (Object / Equipment / Substance) Causing Accident Injury / Damage				
13	Describe Clearly How the Accident Occurred (Use Additional Sheet, If Required)				

**POWER SECTOR****Format for Incident Reporting**

FORMAT NO: HSEP:14-F22

REV NO.: 00

PAGE NO. 02 OF 2

Analysis

14	What Acts and/or Conditions Contributed Most Directly to This Accident	
15	What Are the Basic Reason for The Existence of These Acts and/or Condition?	
16	What Corrective Actions Have Been Taken to Prevent Accident Recurrence?	
	Date:	Signature Of Site HSE Coordinator
17	Comments of Head/Sox	
	Date:	Signature Of Head/SOX

SECTION-B

Special Requirements

(Applicable to this Contract Only)



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 1 of 162

1. Establishment of Common Facilities for whole Project – cost to be borne in full by subcontractor.

Table 1.1

S. No.	Item	Details as per Clause No. of this Section	Applicable / Not Applicable with Remarks	Package
1	Construction of Medical Centre	a	Applicable	Civil
2	Construction of Worker Training Centre (A part of safety park)	b	Applicable	Civil
3	Construction of Vertigo Test Structure (A part of safety park)	c	Applicable	Civil
4	Deployment of Specialists	d	Applicable	By concerned agencies
5	HSE Equipment	e	Applicable	By concerned agencies
6	HSE measurement devices	f	Applicable	By concerned agencies
7	Urinals in under-construction structures	g	Applicable	By concerned agencies
8	Safety Park	h	Applicable	Civil

a. MEDICAL CENTRE

- i. A medical center shall be setup at site with basic facilities for handling medical emergencies
- ii. Deployment of Medical Professional:
 1. A qualified medical professional shall be deployed at site at all times.
 2. When total employee & worker strength at site crosses 500, medical professional with MBBS Degree from recognized institute shall necessarily be deployed
- iii. Ambulance shall be deployed along with a trained driver and accessories as per Schedule V of BOCW Central Rules, 1998. Ambulance shall be utilized exclusively for transporting the accident victim. Ambulance drivers shall be regularly trained in First Aid.
- iv. Non deployment of Ambulance and First Aider as above shall invite a penalty of Rs. 30000 pm and Rs10000 PM respectively
- v. Medical waste shall be disposed as per prevailing legislation (Bio-Medical Waste – Management and Handling Rules, 1998).
- vi. Above are bare minimum requirements. Any legal requirements over and above these specifications shall supersede the above requirements



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 2 of 162

b. WORKER TRAINING CENTRE

- i. Indoor Worker Training Center to be developed at site with seating capacity of at least 50 trainees
- ii. Projector with following minimum specifications:

Native Resolution	XGA, 1024x768
Brightness (ANSI lumens)	3300
Contrast Ratio	13000:1
Display Color	30 Bits
Aspect Ratio	4:3

- iii. A Laptop or Desktop PC with following minimum specifications:

Processor	Intel Celeron Dual Core
Memory (RAM)	2 GB
Graphics Card	2GB Video Memory
Hard Disk Capacity	60 GB
Monitor Size	14 inches
Keyboard	
Mouse	

- iv. Stereo speakers with minimum 50W RMS sound output
- v. PA system for Addressing Workers
- vi. Seating arrangement

c. Development of Vertigo Test Structure:

Vertigo test Structure to be developed as per **Annexure 04**

d. Specialists:

Following specialists shall be deployed by the subcontractor, who shall cater to whole project as per BHEL requirements / instructions

- I. **Qualified T&P Inspector: subcontractor** shall engage one qualified T&P inspector having undergone a certification course in the discipline.
- II. **Qualified Scaffolding Erector and Inspector:** Subcontractor shall deploy one qualified Scaffolding Supervisor and Inspector having undergone a certification course in the discipline



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 3 of 162

- e. **Tools & Equipment:** Following equipment conforming to relevant IS Codes for the job shall be ensured by subcontractor:

S. No.	Item
1	Lifelines
2	Retractable Fall Arrestors
3	Safety Nets (10m X 5m)
4	Sky Climbers
5	Fire Blanket
6	Honey Bee Removal Suit & Kit
7	Flashback Arrestors
8	Barricading Tape
9	Binoculars
10	Walkie-Talkies
11	LOTO kit
12	24-Volt light
13	Sand Buckets
14	Hard barricading planks
15	Standby Fire kits

S. No.	Item	Type of Job / Purpose	Remarks
1	Lifelines (Steel Rope) and posts	Height work	
2	Retractable Fall Arrestors	Height Work	
3	Safety Nets (for fall protection; railings also to be covered)	Height Work	
4	Sky Climbers	Height Work	
5	Fire Blanket, Spark/ slag collector	Hot Work	
6	Honey Bee Removal Suit & Kit	General	
7	Flashback Arrestors	Hot work	
8	Barricading –Hard (Scaffolding Pipes & Clamps or fabricated using structural/round	Height Work, Excavation, General Barricading	
9	Binoculars	HSE Inspection	
10	Walkie-Talkies	Lifting	
11	LOTO kit	Working on charged line	
12	24-Volt light	Confined Space/ temp work	
13	Sand and Water Buckets	Hot work/Electrical work	
15	Standby Fire kits Fire extinguisher stands	Hot work/Electrical work	



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 4 of 162

Above equipment are bare minimum to be essentially maintained at all times. Additional numbers to be deployed as and when required in order to ensure fulfillment of all Safety requirements

f. HSE Measurement Equipment & Tools

S. No	Device
1	ELCB Tester
2	Multi meter (Light cables)
3	Earth Resistance Meter
4	Lux Meter
5	Decibel Meter
6	Anemometer
7	Breath Analyzer (Alcohol)
8	Multi-gas analyzer
9	Gas leakage detector / alarm
10	Gas monitor (confined space)
11	Radiation meter & Badges
12	Blood pressure monitor
13	Fire detectors
14	Dust Particle Detector

g. Urinals in Under-construction structures:

Urinals for in under-construction structures for easy access eg. In case of Boiler elevations etc.

2. **Shared Facilities** – where part of operating cost is borne by subcontractor in proportion to contract value

The subcontractor shall bear running expenses of above facilities on a 'proportional to contract value sharing basis as finalized by BHEL.

S. No.	Facility
1.	Operation of Ambulance, Nurses, Medical Consumables
2.	Construction, Maintenance & Upkeep of Latrines and Urinals in Common spaces
3.	Drinking Water Provision in Common Spaces
4.	Dust Control / Water Sprinkling, Pest Control, Fumigation at Site



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 5 of 162

LIST OF REFERENCES

S. No	Code Name	Title
1	IS: 818-1888 (Reaffirmed 2003)	Code of Practice for Safety and Health requirements in Electric and Gas Welding and Cutting operations.
2	IS: 1179-1967 (Reaffirmed 2003)	Specification for Equipment for Eye & Face protection during welding.
3	IS: 1989 (Part 2):1986 (Reaffirmed 1997)	Specification for Leather Safety Boots & Shoes
4	IS:2925 – 1984 (Reaffirmed 2010)	Specification for Industrial Safety Helmets
5	IS:3521: 1999 (Reaffirmed 2002)	Industrial Safety Belts & Harnesses-Specification
6	IS:3646(Part II) – 1966(Reaffirmed 2003)	Code of Practice for Interior Illumination
7	IS:3696 (Part I) – 1987 (Reaffirmed 2002)	Safety Code for Scaffolds and Ladders
8	IS: 3696(Part 2) : 1991 (Reaffirmed 2002)	Scaffolds and Ladders-Code of Safety
9	IS: 3764:1992	Excavation Work – Code of Safety
10	IS:3786 – 1983 (Reaffirmed 2002)	Method for Computation of Frequency and Severity Rates for Industrial Injuries and Classification of Industrial Accidents
11	IS.4014.2.1967	Steel tubular Scaffolding
12	IS:4770: 1991 (Reaffirmed 2006)	Rubber Gloves Specification (Electricals Purposes)
13	IS:4912: 1978 (Reaffirmed 2002)	Safety Requirements for Floor and Wall Openings, Railings and Toe Boards
14	IS: 5557 – 1969	Industrial and Safety rubber knee boots.
15	IS: 5983 – 1980 (Reaffirmed 2002)	Specification for Eye-Protectors
16	IS:6519 – 1971 (Reaffirmed 1997)	Code of Practice for Selection, Care and Repair of Safety Footwear
17	IS.6549.1972	Glossary of terms used for Lifting tackles
18	IS:6994(Part I)-1973 (Re affirmed 1996)	Specification for Industrial Safety Gloves Leather and Cotton Gloves
19	IS.7215.1974	Steel Structure Fabrication
20	IS.7969.1975	Handling and storage of building material



POWER
SECTOR

HEALTH, SAFETY AND ENVIRONMENT PLAN
FOR
SITE OPERATIONS
(SECTION-B)

Doc. No.: HSEP:14-ER

Rev.: 00

Date: 25.04.19

Page 6 of 162

21	IS:8519 – 1977 (Reaffirmed 1983)	Guide for Selection of Industrial Safety Equipment for Body Protection.
22	IS:8520 – 1977 (Reaffirmed 2002)	Guide for Selection of Industrial Safety Equipment for Eye, Face and Ear Protection.
23	IS:9167:1979	Specification for Ear-Protectors
24	IS:9473:2002	Respiratory Protective Devices-Filtering Half Masks to protect against Particles-Specification.
25	IS: 9944:1992 (Reaffirmed 2003)	Natural and Man-made Fiber Rope Slings- Recommendations on Safe working loads.
26	IS 11006 : 2011	Flash Back(Flame) Arrestor Specification
27	IS: 11226 – 1985	Leather Safety footwear having direct molding sole.
28	IS:11057 – 1884 (Reaffirmed 2001)	Specification for Industrial Safety Nets
29	IS: 12254:1993 (Reaffirmed 2002)	Polyvinyl Chloride (PVC) Industrial Boots Specification
30	IS:13367(Part 1):1992 (Reaffirmed 2003)	Safe Use of Cranes-Code of Practice
31	IS: 14166:1994 (Reaffirmed 2002)	Respiratory Protective Devices-Full Face Masks Specification
32	IS:14746: 1999 (Reaffirmed 2003)	Respiratory Protective Devices-Half Masks and Quarter Masks - Specification
33	IS: 15397 :2003 (Reaffirmed 2008)	Portable Extinguisher Mechanical Foam Type(Stored Pressure)-Specification
34	IS: 19011:2002	Guidelines for Quality and/or Environmental Management Systems Auditing

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)	Doc. No.: HSEP:14 Rev.: 01 Date: Page 1 of 162

As per Contract Labor (Regulation & Abolition Act), Central Rules, 1971,

- (1) The first-aid box shall be distinctively marked with a Red Cross on a white background and shall contain the following items, namely:

(a) For establishments in which the number of contract laborers employed does not exceed fifty, each first aid box shall contain the following equipment:

(i)	6 small sterilized dressings
(ii)	3 medium size sterilized dressings
(iii)	3 large size sterilized dressings
(iv)	6 pieces of sterilized eye pads in separate sealed packets.
(v)	6 roller bandages 10 cm wide.
(vi)	6 roller bandages 5 cm wide.
(vii)	One tourniquet
(viii)	A supply of suitable splints
(ix)	Three packets of safety pins.
(x)	Kidney tray.
(xi)	3 large sterilized burn dressings.
(xii)	1 (30ml) bottle containing a two percent alcoholic solution of iodine
(xiii)	1 (30 ml) bottle containing Sal volatile having the dose and mode of administration indicated on the label
(xiv)	1 snake bite lancet
(xv)	1 (30gms) bottle of potassium permanganate crystals.
(xvi)	1 pair scissors
(xvii)	1 copy of the First-Aid leaflet issued by the Director General, Factory Advice Service and Labor Institutes, Government of India.
(xviii)	A bottle containing 100 tablets (each of 5 grains) of aspirin
(xix)	Ointment for burns
(xx)	A bottle of suitable surgical anti-septic solution



Details and Contents of First Aid Box


(b) For establishment in which the number of contract laborers exceeds fifty each first-aid box shall contain the following equipment:

(i)	12 small sterilized dressings
(ii)	6 medium size sterilized dressings
(iii)	6 large size sterilized dressings.
(iv)	6 large size sterilized burn dressings
(v)	6 (15 grams) packets sterilized cotton wool
(vi)	12 pieces of sterilized eye pads in separate sealed packets.
(vii)	12 roller bandages 10 cm wide.
(viii)	12 roller bandages 5 cm wide.
(ix)	One tourniquet.
(x)	A supply of suitable splints.
(xi)	Three packets of safety pins.
(xii)	Kidney tray.
(xiii)	Sufficient number of eye washes bottles filled with distilled water or suitable liquid clearly indicated by a distinctive sign which shall be visible at all times.
(xiv)	4 per cent Xylocaine eye drops, and boric acid eye drops and soda by carbonate eye drops.
(xv)	1 (60ml) bottle containing a two percent alcoholic solution of iodine
(xvi)	One (two hundred ml) bottle of mercurochrome (2 per cent) solution in water.
(xvii)	1 (120ml) bottle containing Sal volatile having the dose and mode of administration indicated on the label.
(xviii)	1 roll of adhesive plaster (6 cmX1 meter)
(xix)	2 rolls of adhesive plaster (2 cmX1 meter)
(xx)	A snake bite lancet.
(xxi)	1 (30 grams) bottle of potassium permanganate crystals.
(xxii)	1 pair scissors
(xxiii)	1 copy of the First-Aid leaflet issued by the Director-General, Factory Advice service and labor Institutes, Government of India.
(xxiv)	a bottle containing 100 tablets (each of 5 grains) of aspirin
(xxv)	Ointment for burns
(xxvi)	A bottle of a suitable surgical anti septic solution.

(2) Adequate arrangement shall be made for immediate recoupment of the equipment when necessary.

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)	Doc. No.: HSEP:14
		Rev.: 01
		Date:
		Page 1 of 162

Table 1	
S. No.	Topic
1	Vertigo / Height working Test Structure Layout
2, 3	Structure Layout Sketch
3	Actual Photo of a typical structure
4	Bill of Materials
5	Guidelines for Conducting the Test

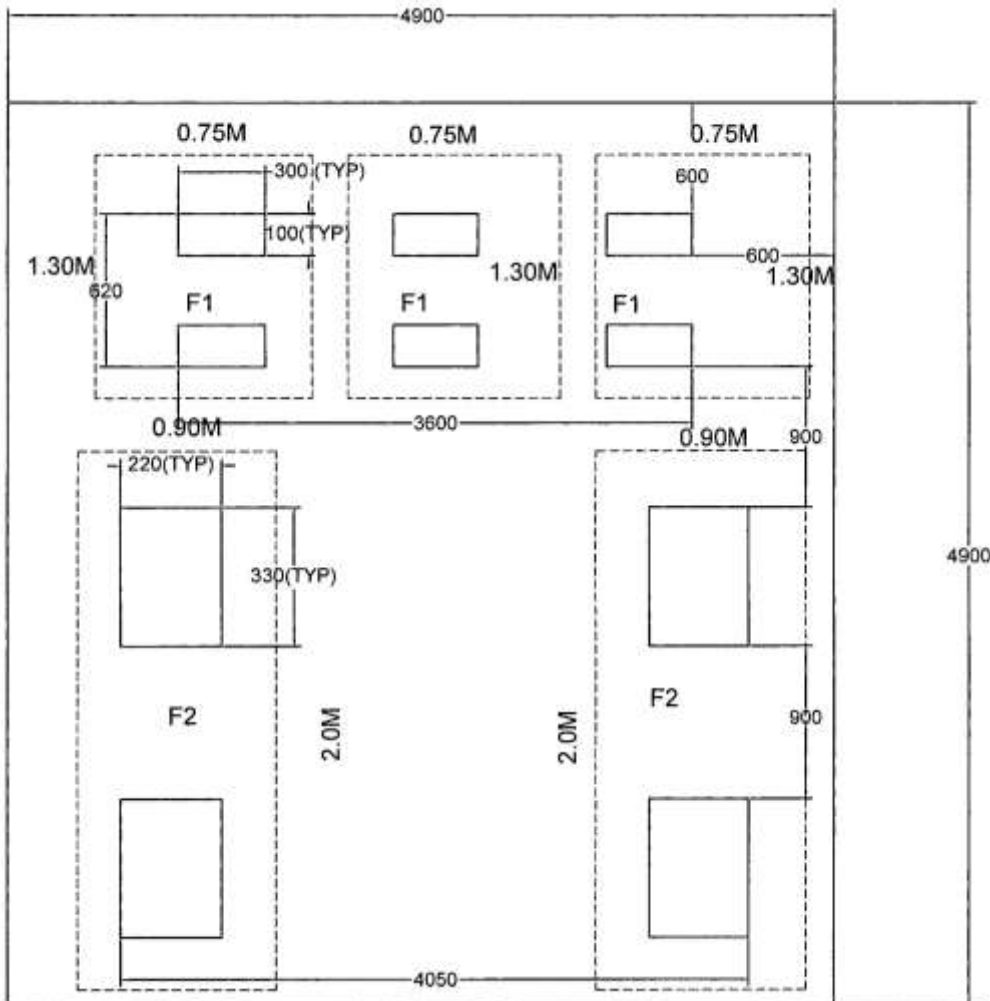


Note:

- All dimensions are in mm
- Drawing is not to scale
- Inside boundary area to be filled with sand to level with road (external)
- Details of F1 and F2 are shown below

Figure 1: Vertigo / Height Work Test Structure Layout

Vertigo Test Structure Specifications

Page 2 of 6

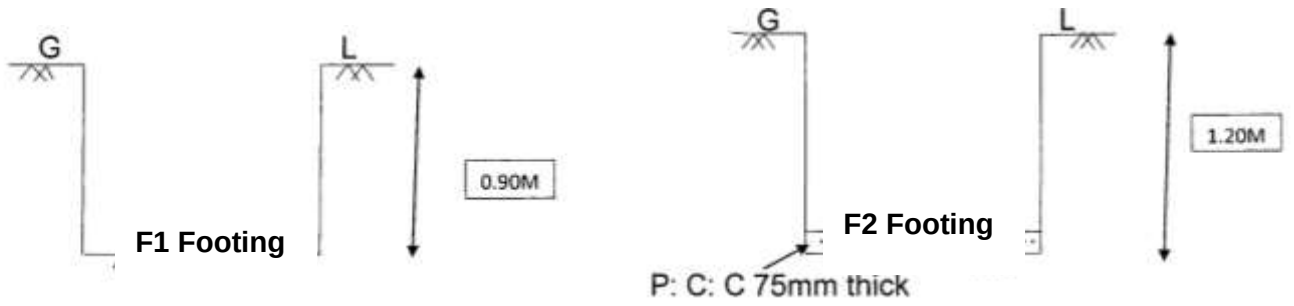**Note:**

- Concrete Grade is M15
- Drawing is not to scale
- TOC is at Road Level
- G L refers to Ground Level

Figure 2


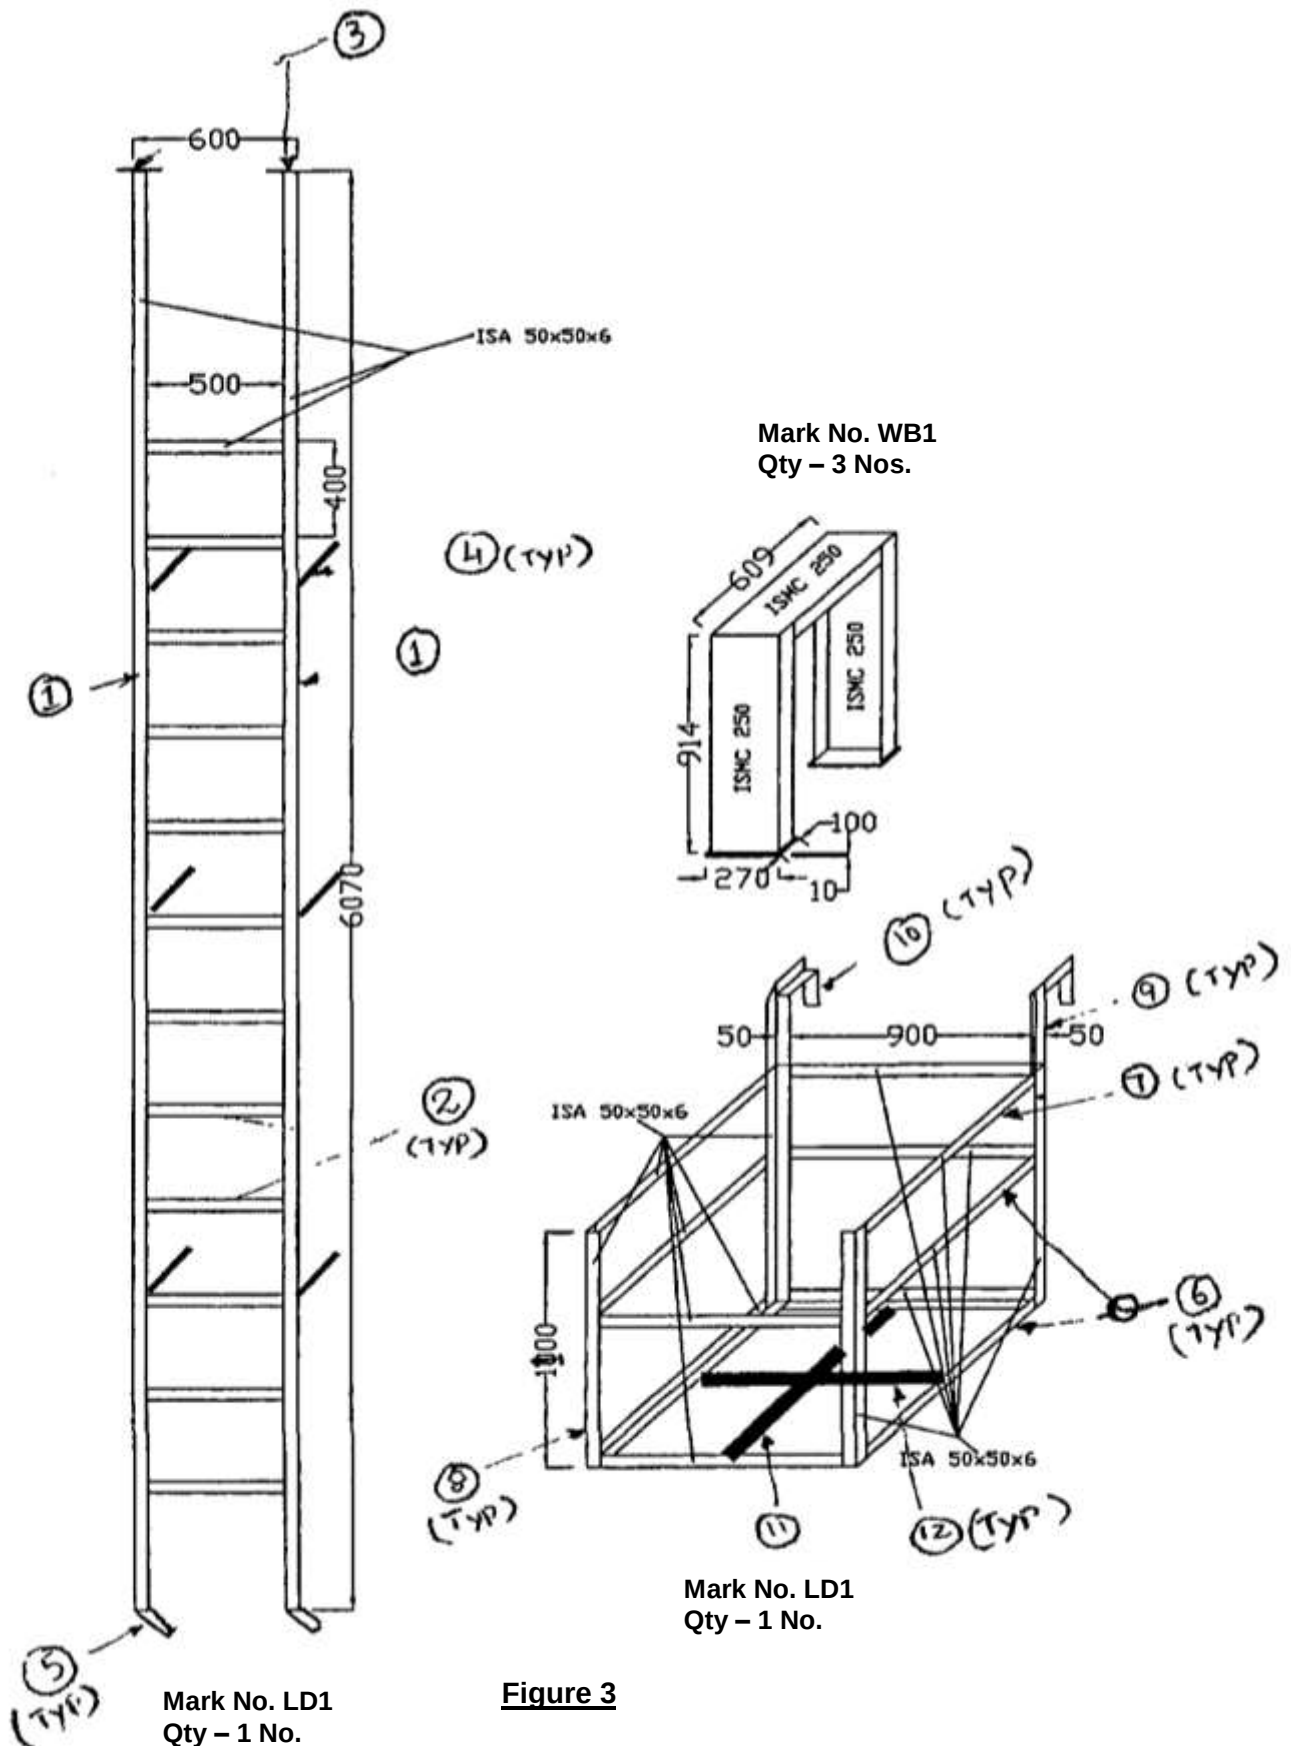


Figure 3

Figure 4

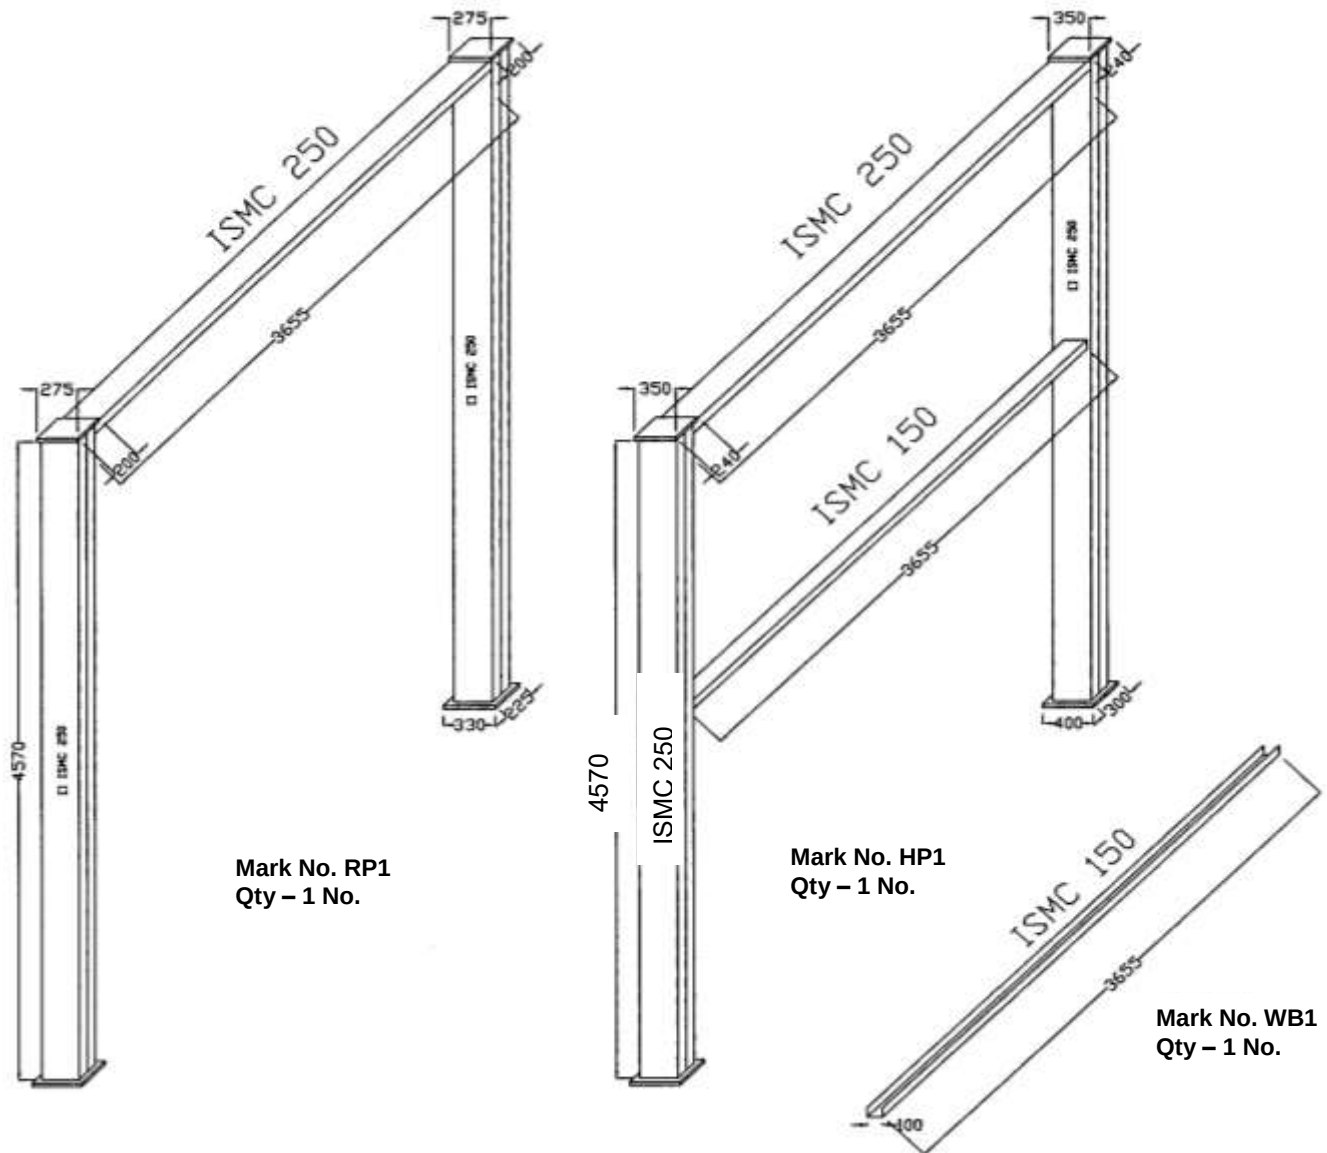

Pic-1: Actual Photo of a Typical Vertigo Test

**Table 2: BOM FOR HEIGHT WORK INDUCTION TRAINING MODULE**

Sl. No.	Description	Width (mm)	Length (mm)	Qty (No's)	Unit Wt (Kgs)	Total Wt. (Kgs)
MKD NO. WB1						
1	ISMC250		609	3	34.20	62.483
2	ISMC250		914	6	34.20	187.553
3	ISMC100		3655	1	9.56	34.942
4	PL10	100	270	6	78.50	12.717
			Total Weight (Kgs)			297.695
MKD NO. RP1						
1	ISMC250		4570	4	34.20	625.176
2	ISMC250		3655	1	34.20	125.001
3	PL25	225	330	2	196.25	29.143
4	PL25	200	275	2	196.25	21.588
			Total Weight (Kgs)			800.908
MKD NO. HP1						
1	ISMC250		4570	4	34.20	625.176
2	ISMC250		3655	1	34.20	125.001
3	ISMC150		3655	1	16.80	61.404
4	PL25	300	400	2	196.25	47.100
5	PL25	240	350	2	196.25	32.970
			Total Weight (Kgs)			891.651
MKD NO. LD1						
1	ISA50X50X6		6070	2	4.50	54.630
2	ISA50X50X6		500	12	4.50	27.000
3	PL12	75	75	2	94.20	1.060
4	ISA50X50X6		300	6	4.50	8.100
5	ISA50X50X6		255	2	4.50	2.295
6	ISA50X50X6		1000	8	4.50	36.000
7	ISA50X50X6		910	3	4.50	12.285
8	ISA50X50X6		1100	4	4.50	19.800
9	ISA50X50X6		650	2	4.50	5.850
10	ISA50X50X6		350	2	4.50	3.150
11	PL8	75	900	1	62.80	4.239
12	PL8	75	410	2	62.80	3.862
			Weight (Kgs)			178.271
			Total Weight (Kgs)			2168.525



A. Test Procedure / Guidelines

Fear of height may be physiological or psychological. Therefore, to rule out any possibility of physiological factor, detailed medical check-up of workers is carried out before vertigo test. Medical check-up of workers includes the following:

history of past illnesses (like epilepsy, drug allergy, diabetics/ hypertension, unconsciousness etc.), general physical examination (like height, weight, BMI, build and nourishment etc.), measurement of pulse rate, Blood Pressure, respiratory rate.

After this check-up, those who are found suitable for height work by examining doctor, are allowed to undergo vertigo test.

During this health check-up, psychology of workers is also studied. If any worker finds it extremely difficult/ frightening to climb the monkey ladder & walk on the beam, during/after performing vertigo test or even before performing, then he is treated as disqualified.

As per standard, during vertigo test, worker is allowed to climb on a foundation through monkey ladder, walk on a beam, then steps down at the other end of beam, through monkey ladder. Height of the beam should be at least six feet from ground level. All necessary safety precautions are taken during this test. Worker has to wear full body harness with double lanyard. A horizontal lifeline is run parallel to the beam and worker has to put his lanyards into the lifeline. Additionally, a safety net is also put below the beam for rescue of the victim in case of a fall from beam.

Following activities are generally carried during testing:

1. Walking Bench Training:

- a. Person should walk over the channel. He should maintain balance & walk without much problem.
- b. If the person has problem to balance himself on repeated chances, he may be having flat foot or some other problem. So, he may not be fit for height work.

2. Rope Climb Training:

Person should be able to climb the rope up to the top channel for ensuring that in case of fall, a person hanging on the safety harness, will be able to safely climb back to the platform within minimum time period before the safety harness start breaking down under the load.

3. Height Work Training:

Person should walk freely on the middle channel while holding the top channel with the help of safety harness.

4. Ladder for Vertical fall arrestor Training:

Vertical fall arrestor rope is fixed from top to bottom of the ladder. It will ensure:

- Usage of vertical fall arrestor.
- Usage of two lanyards of a safety harness.
- Ensure 3-point contact on the ladder while climb.

5. Chair for work at height Training:

- Climb through vertical ladder with two lanyard ropes.
- Hooking of two lanyard ropes to life line. With this safe arrangement, he can walk to chair.
- Sits in the chair safely, comes out & walks back to the vertical ladder & come down from vertical ladder. After completion of vertigo test, blood pressure of worker is again measured. If it is not within acceptable limits for any worker, concerned worker is denied height pass.

Only those who pass the above training are fit for height work.

 POWER SECTOR	HEALTH, SAFETY AND ENVIRONMENT PLAN FOR SITE OPERATIONS (SECTION-B)	Doc. No.: HSEP:14 Rev.: 01 Date: Page 7 of 162

<u>Safety Park Requirements</u>		
S.No	Training room(capacity 40 persons)	Qty.
1	Class room chair	25
2	Office Table	3
3	Rolling chair	3
4	Almirah	1
5	Visitor chair	10
6	Drawer	2
7	Single bed	1
8	Mattress	1
9	Projector	1
10	Projector screen	1
11	Sound speakers	1
12	Desktop Computer	3
13	Printer	1
14	White Board	1
15	Marker	5
16	Duster	1
17	Door Mat	9
18	Dustbin(Smaal + BIG)	7+1
19	Mannequin	1
20	Helmet	1
21	Face Shield	1
22	Safety Goggle	1
23	Welding sheild	1
24	Ear Muff	1
25	Ear Plug	1
26	Nose Mask	1
27	Breathing Apparatus	1
28	Hand Gloves(Cotton)	1
29	Hand Gloves for Electrician (Rubber)	1
30	Hand gloves Rubber	1
31	Hand Gloves Lather	1
32	Construction Safety Uniform(Boiler Suit)	1
33	Welding Apron	1
34	Safety Shoes	1
35	Leg Guard For Welder	1
36	Poster for Occupational Disease like Pneumoconosis,silicosis etc.	1
37	Gum Boot	1

38	Full Body Harness	1
39	8 MM Wire rope for life line. Length 20 Feet(FT).	1
40	Sfety Net for man & materials.Size 15 FT X 15FT.	1
41	MonkEy ladder 15 FT.	1
45	Fire Extingusher All types(DCP,CO2 & Foam)	1
46	Bed Sheet	1
47	Pillow	1
48	Curtain	12
49	curtain fittings	12
50	AC (1.5 TON)	3
51	AC (2 TON)	2
52	Rope pully.	1
53	PP Rope for pully 20 MTR.	
54	Ladder Clamps	6
55	Allumuniam ladder 6 MTR.	1
56	Carry Bag	
57	Scaffolding all Materilas for 5 Mtr. Height like.Sacffolding tubes,Sole plate,base plate,Right angle clamps,Swielclamps,beam clamps,Joint box/joint pin,toe guard/board,	



Health, Safety & Environment, Power Sector Headquarters

Bharat Heavy Electricals Limited

Regd. Office: BHEL House, Siri Fort, New Delhi – 110049, India

Website: www.bhel.com

FORMS & PROCEDURES

INDEX

SN	Description	Form No	Remarks
1.0	Forms		
1.1	Offer forwarding Letter/Submission of Tender	F-1 (Rev 00)	
1.2	Declaration by Authorised Signatory	F-2 (Rev 00)	
1.3	No Deviation Certificate	F-3 (Rev 00)	
1.4	Declaration confirming knowledge about Site Conditions	F-4 (Rev 00)	
1.5	Declaration for relation in BHEL	F-5 (Rev 00)	
1.6	Non Disclosure Certificate	F-6 (Rev 00)	
1.7	Bank Account Details for E-Payment	F-7 (Rev 00)	
1.8	Form for seeking clarifications	F-8 (Rev 00)	
1.9	Capacity Evaluation of Bidder for current Tender	F-9 (Rev 00)	
1.10	Contract Agreement	F-10 (Rev 00)	
1.11	Bank Guarantee for Security Deposit	F-11 (Rev 00)	
1.12	Bank Guarantee for ~~Interest Bearing Refundable~~ Advance	F-12 (Rev 00)	
1.13	Extension of Validity of Bank Guarantee	F-13 (Rev 00)	
1.14	Monthly Plan & Review with Contractors	F-14 (Rev 00)	
1.15	Monthly Performance Evaluation of Contractor	F-15 (Rev 01)	Revised
1.16	~~Evaluation of Contractor Performance (Quarterly)~~	~~F-16 (Rev 00)~~	Deleted
1.17	Evaluation of Contractor Performance (Annual)	F-17 (Rev 01)	Under revision ##
1.18	Evaluation of Contractor Performance for the Contract (Overall)	F-18 (Rev 01)	Under revision ##

FORMS & PROCEDURES

SN	Description	Form No	Remarks
1.19	Milestone Completion Certificate	F-19 (Rev 00)	
1.20	Completion Certificate	F-20 (Rev 01)	Revised
1.21	Indemnity Bond	F-21 (Rev 00)	
1.22	Consortium Agreement	F-22 (Rev 00)	
1.23	Refund of Security Deposit	F-23 (Rev 00)	
1.24	Refund of Guarantee Money	F-24 (WAM-11)	
1.25	Power of Attorney for Submission of Tender/Signing Contract Agreement	F-25 (Rev 00)	
1.26	Analysis of Unit Rates Quoted	F-26 (Rev 00)	
1.27	RA Bill Format	WAM-6	
1.28	Final Bill Submission format with No Claim Certificate and No Demand Certificate	WAM-7	
1.29	PROFORMA FOR PERFORMANCE BANK GUARANTEE		
1.30	BANK GUARANTEE FOR SD CUM PBG BOND		
2.0	Procedures		
2.1	Procedure and Business Rules for Reverse Auction	As per Company Policy	
2.2	Integrity Pact	As per Company Policy	
3.0	Customer specific procedures		
3.1			

- BANK GUARANTEE FORMATS FOR "RELEASE OF AMOUNTS WITHED/ LIQUIDATED DAMAGES AMOUNT", "SUPPLY FREE ISSUE MATERIAL" & "EARNEST MONEY" IS ALSO GIVEN.

: will be released later

FORMS & PROCEDURES

Form No: F-01 (Rev 00)

OFFER FORWARDING LETTER / TENDER SUBMISSION LETTER (To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

Offer Reference No:.....

Date:.....

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : Submission of Offer against Tender Specification No:

I/We hereby offer to carry out the work detailed in the Tender Specification issued by Bharat Heavy Electricals Limited, Power Sector-....., in accordance with the terms and conditions thereof.

I/We have carefully perused the following listed documents connected with the above work and agree to abide by the same.

1. Amendments/Clarifications/Corrigenda/Errata/etc issued in respect of the Tender documents by BHEL
2. Notice Inviting Tender (NIT)
3. Price Bid
4. Technical Conditions of Contract
5. Special Conditions of Contract
6. General Conditions of Contract
7. Forms and Procedures

Should our Offer be accepted by BHEL for Award, I/we further agree to furnish 'Security Deposit' for the work as provided for in the Tender Conditions within the stipulated time as may be indicated by BHEL.

I/We further agree to execute all the works referred to in the said Tender documents upon the terms and conditions contained or referred to therein and as detailed in the appendices annexed thereto.

I/We have deposited/depositing herewith the requisite Earnest Money Deposit (EMD) as per details furnished in the Check List.

Authorised Representative of Bidder

Signature :

Name :

Address :

Place:

Date:

FORMS & PROCEDURES

Form No: F-02 (Rev 00)

DECLARATION BY AUTHORISED SIGNATORY OF BIDDER

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration by Authorised Signatory**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

I/We, hereby certify that all the information and data furnished by me with regard to the above Tender Specification are true and complete to the best of my knowledge. I have gone through the specifications, conditions, stipulations and all other pertinent issues till date, and agree to comply with the requirements and Intent of the specification.

I further certify that I am authorised to represent on behalf of my Company/Firm for the above mentioned tender and a valid Power of Attorney to this effect is also enclosed.

Yours faithfully,

(Signature, Date & Seal of Authorized
Signatory of the Bidder)

Date:

Enclosed : Power of Attorney

FORMS & PROCEDURES

Form No: F-03 (Rev 00)

NO DEVIATION CERTIFICATE

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **No Deviation Certificate**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

We hereby confirm that we have not changed/ modified/materially altered any of the tender documents as downloaded from the website/ issued by BHEL and in case of such observance at any stage, it shall be treated as null and void.

We also hereby confirm that we have neither set any Terms and Conditions and nor have we taken any deviation from the Tender conditions together with other references applicable for the above referred NIT/Tender Specification.

We further confirm our unqualified acceptance to all Terms and Conditions, unqualified compliance to Tender Conditions, Integrity Pact (if applicable) and acceptance to Reverse Auctioning process.

We confirm to have submitted offer in accordance with tender instructions and as per aforesaid references.

Thanking you,

Yours faithfully,

(Signature, date & seal of authorized
representative of the bidder)

FORMS & PROCEDURES

Form No: F-04 (Rev 00)

DECLARATION CONFIRMING KNOWLEDGE ABOUT SITE CONDITIONS

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration confirming knowledge about Site conditions**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

I/We, _____ hereby declare and confirm that we have visited the Project Site as referred in BHEL Tender Specifications and acquired full knowledge and information about the Site conditions including Wage structure, Industrial Climate, the Law & Order and other conditions prevalent at and around the Site. We further confirm that the above information is true and correct and we shall not raise any claim of any nature due to lack of knowledge of Site conditions.

I/We, hereby offer to carry out work as detailed in above mentioned Tender Specification, in accordance with Terms & Conditions thereof.

Yours faithfully,

(Signature, Date & Seal of Authorized
Representative of the Bidder)

Date :

Place:

FORMS & PROCEDURES

Form No: F-05 (Rev 00)

DECLARATION FOR RELATION IN BHEL

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder failing which the offer of Bidder is liable to be summarily rejected)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Declaration for relation in BHEL**

Ref : 1) NIT/Tender Specification No:,

I/We hereby submit the following information pertaining to relation/relatives of Proprietor/Partner(s)/Director(s) employed in BHEL

Tick(✓) any one as applicable:

1. The Proprietor, Partner(s), Director(s) of our Company/Firm DO NOT have any relation or relatives employed in BHEL

OR

2. The Proprietor, Partner(s), or Director(s) of our Company/Firm HAVE relation/relatives employed in BHEL and their particulars are as below:

(i)

(ii)

Signature of the Authorised Signatory

Note:

1. Attach separate sheet, if necessary.
2. If BHEL Management comes to know at a later date that the information furnished by the Bidder is false, BHEL reserves the right to take suitable action against the Bidder/Contractor.

FORMS & PROCEDURES

Form No: F-06 (Rev 00)

NON DISCLOSURE CERTIFICATE

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

NON DISCLOSURE CERTIFICATE

I/We understand that BHEL PS __ is committed to Information Security Management System as per their Information Security Policy.

Hence, I/We M/s.....
who are submitting offer for providing services to BHEL PS __ against
Tender Specification No: _____,
hereby undertake to comply with the following in line with Information
Security Policy of BHEL PS __, _____

- To maintain confidentiality of documents & information which shall be used during the execution of the Contract.
- The documents & information shall not be revealed to or shared with third party which shall not be in the business interest of BHEL PS__.

(Signature, date & seal of Authorized
Signatory of the bidder)

Date:

FORMS & PROCEDURES

Form No: F-07 (Rev 00)

BANK ACCOUNT DETAILS FOR E-PAYMENT

(To be given on Letter head of the Company /Firm of Bidder, and **ENDORSED (SIGNED & STAMPED) BY THE BANK** to enable BHEL release payments through Electronic Fund Transfer (EFT/RTGS))

1. Beneficiary Name :
2. Beneficiary Account No. :
3. Bank Name & Branch :
4. City/Place :
5. 9 digit MICR Code of Bank Branch :
6. IFSC Code of Bank Branch :
7. Beneficiary E-mail ID :
(for payment confirmation)

NOTE: In case Bank endorsed certificate regarding above has already been submitted earlier, Kindly submit photocopy of the same

FORMS & PROCEDURES

Form No: F-08 (Rev 00)

FORMAT FOR SEEKING CLARIFICATION

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : **Request for Clarification**

Ref : 1) NIT/Tender Specification No:
2) All other pertinent issues till date

Sl no	Reference clause of Tender Document	Existing provision	Bidder's query	BHEL's clarification
1				
2				
3				

Yours faithfully,

(Signature, date & seal of Authorized
Representative of the Bidder)

FORMS & PROCEDURES

FORMS & PROCEDURES

Form No: F-09 (Rev 00)

CAPACITY EVALUATION OF BIDDERS FOR CURRENT TENDER

SL NO.	DESCRIPTION OF WORK (Similar to Tendered Scope)	WORK ORDER REF & DATE	CONTRACT VALUE (Rs. LACS)	CUSTOMER NAME & ADDRESS	CURRENT STATUS OF THE JOB ALONG WITH LATEST MILE STONE COMPLETED	%AGE OF WORK COMPLETED	VALUE OF BALANCE WORK (Rs. Lacs)
1							
2							
3							
4							
5							

NOTES:

1. BIDDERS ARE REQUIRED TO FURNISH ALL THE JOBS OF SIMILAR NATURE WHICH THEY ARE EXECUTING (IN PROGRESS) AT THE TIME OF SUBMISSION OF TENDER, AS PER ABOVE FORMAT.

2. BIDDERS HEREBY UNDERTAKE THAT THEY HAVE FURNISHED THE DETAILS SOUGHT AS PER POINT NO. 1 IN TOTALITY AND THAT THE DETAILS FURNISHED IS COMPLETE IN ALL RESPECT.

3. BHEL WILL TAKE APPROPRIATE ACTION AS DEEMED FIT , IN CASE, IT IS FOUND AT A LATER DATE THAT THE CONTRACTOR HAD SUPPRESSED THE FACTS AND HAVE NOT FURNISHED THE CORRECT & COMPLETE INFORMATIONS.

Signature

DATE :

PLACE:

Name, Designation & Seal of Bidder

FORMS & PROCEDURES

CONTRACT AGREEMENT

Form No: F-10 (Rev 00)

BHARAT HEAVY ELECTRICALS LIMITED
(A Government of India Undertaking)
Power Sector – Region

CONTRACT AGREEMENT

AGREEMENT NO. _____

NAME OF WORK	
NAME OF THE CONTRACTOR WITH FULL ADDRESS	
VALUE OF WORK AWARDED	
LETTER OF INTENT NO.	
TIME ALLOTTED FOR COMPLETING THE WORK (DATE OF COMPLETION)	

SIGNATURE OF CONTRACTOR

(SIGNATURE OF BHEL OFFICER)

FORMS & PROCEDURES

CONTRACT AGREEMENT

THIS AGREEMENT MADE THIS _____ DAY OF _____ between BHARAT HEAVY ELECTRICALS LIMITED (A Government of India Enterprise) a Company incorporated under the Companies Act, 1956, having its Registered Office at BHEL House, Siri Fort New Delhi- 110049 (herein after called BHEL) of the ONE PART.

AND

M/S _____
_____ (hereinafter called the 'Contractor') of the SECOND PART.

WHEREAS M/s _____state that they have acquired and possess extensive experience in the field of _____

And Whereas in response to an Invitation to Tender No. _____ issued by BHEL for execution of _____ the contractor submitted their offer No.- _____dated _____And whereas BHEL has accepted the offer of the Contractor on terms and conditions specified in the Letter of Intent No. _____dated _____read with the references cited therein.

THIS AGREEMENT WITNESSES AND it is hereby agreed by and between the parties as follows:

1. That the contractor shall execute the work of _____and more particularly described in Tender Specification No. _____including Drawings and Specifications (hereinafter called the said works) in accordance with and subject to terms and conditions contained in these presents, instructions to Tenderers, General Conditions of Contract, Special Conditions, Annexures, Letter of Intent dated _____and such other instructions, Drawings, Specifications given to him from time to time by BHEL.
2. The Contractor is required to furnish to BHEL Security deposit in the form of cash/ approved securities/ Bank Guarantee valid upto _____ for a sum of Rs. _____ towards satisfactory performance and completion of the Contract.
3. The Contractor has furnished a Bank Guarantee bearing no. _____dated _____for a sum of Rs. _____executed by _____ in favour of BHEL towards Security Deposit valid upto _____

OR

The Contractor has furnished to BHEL an initial Security Deposit of Rs. _____in the form of cash / approved Securities/ B.G No. _____ dated _____ for Rs. _____executed by _____ in favour of BHEL valid upto _____ and has agreed for recovery of the balance security deposit by BHEL @ 10% of the value of work done from each running bill till the entire Security Deposit is recovered.

OR

FORMS & PROCEDURES

The contractor has furnished to BHEL an initial Security Deposit of Rs.----- (Rs.----- vide Bank draft No.----- dated ----- and by adjusting EMD of Rs.----- submitted vide Bank draft No.----- dt.-----) and has agreed for recovery of balance Security Deposit by BHEL @ 10% of the value of work done from each running bill till the entire security deposit is recovered.

4. The Contractor hereby agrees to extend the validity of the Bank Guarantee for such further period or periods as may be required by BHEL and if the Contractor fails to obtain such extension(s) from the Bank, the Contractor, shall pay forthwith or accept recovery of Rs.----- from the bills in one installment and the contractor further agrees that failure to extend the validity of the Bank Guarantee or failure to pay the aforesaid amount in the manner specified above shall constitute breach of contract. In addition to above, BHEL shall be entitled to take such action as deemed fit and proper for recovering the said sum of Rs.-----

OR

In case the contractor furnishes the bank guarantee at a later date the contractor hereby agrees to extend the validity of bank guarantee for such further period or periods as may be required by BHEL and if the contractor fails to obtain such extension(s) from the bank, the contractor shall pay forthwith or accept recovery of the amount of bank guarantee given in lieu of security deposit from the bills in one installment and the contractor further agrees that failure to extend the validity of bank guarantee or failure to pay the aforesaid amount in the manner specified above shall constitute breach of contract. In addition to above, BHEL shall be entitled to take such action as deemed fit and proper for recovering the said sum.

5. That in consideration of the payments to be made to the Contractor by BHEL in accordance with this Agreement the Contractor hereby covenants and undertakes with BHEL that they shall execute, construct, complete the works in conformity, in all respects, with the terms and conditions specified in this Agreement and the documents governing the same.
6. That the Contractor shall be deemed to have carefully examined this Agreement and the documents governing the same and also to have satisfied himself as to the nature and character of the Works to be executed by him.
7. That the Contractor shall carry out and complete the execution of the said works to the entire satisfaction of the Engineer or such other officer authorised by BHEL, within the agreed time schedule, the time of completion being the essence of the Contract.
8. That BHEL shall, after proper scrutiny of the bills submitted by the Contractor, pay to him during the progress of the said works such sum as determined by BHEL in accordance with this Agreement.
9. That this Agreement shall be deemed to have come into force from ----- the date on which the letter of intent has been issued to the Contractor.

FORMS & PROCEDURES

10. That whenever under this contract or otherwise, any sum of money shall be recoverable from or payable by the Contractor, the same may be deducted in the manner as set out in the General Conditions of Contract or other conditions governing this Agreement.
11. That all charges on account of Octroi, Terminal and other taxes including sales tax or other duties on material obtained for execution of the said works shall be borne and paid by the Contractor.
12. That BHEL shall be entitled to deduct from the Contractor's running bills or otherwise Income Tax under Section 194 (C) of the Income Tax Act, 1961.
13. That BHEL shall be further entitled to recover from the running bills of the Contractor or otherwise such sum as may be determined by BHEL from time to time in respect of consumables supplied by BHEL, hire charges for tools and plants issued (Where applicable) and any other dues owed by the Contractor.
14. That it is hereby agreed by and between the parties that non-exercise, forbearance or omission of any of the powers conferred on BHEL and/or any of its authorities will not in any manner constitute waiver of the conditions hereto contained in these presents and the liability of the Contractor with respect to compensation payable to BHEL or Contractor's obligations shall remain unaffected.
15. It is clearly understood by and between the parties that in the event of any conflict between the Letter of Intent and other documents governing this Agreement, the provisions in the Letter of Intent shall prevail.

16. The following documents

1. Invitation to Tender No-----
and the documents specified therein.
2. Contractor's Offer No-----
dated-----.
3. _____
4. _____
5. _____
6. Letter of Intent No_____ dated_____.
7. _____

shall also form part of and govern this Agreement.

IN WITNESS HEREOF, the parties hereto have respectively set their signatures in the presence of

WITNESS

(CONT

RACTOR)

FORMS & PROCEDURES

1. (to be signed by a person holding
a valid Power of Attorney)

2.

WITNESS (For and on behalf of BHEL)

1.

2.

PROFORMA OF BANK GUARANTEE (in lieu of SECURITY DEPOSIT)

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having agreed to exempt (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ (hereinafter called the said Contractor which term includes supplier), from demand under the terms and conditions of the Contract reference No. _____² dated _____² valued at Rs. ² (Rupees -----)² for <Nature of the Work>³ (hereinafter called the said Contract) of Security Deposit for the due fulfilment by the said contractor of the terms and conditions contained in the said Contract, on production of a Bank Guarantee for Rs. _____⁴ (Rupees _____ only), we _____ (indicate the name and address of the Bank) having its Head Office at _____ (address of the head Office) (hereinafter referred to as the Bank) at the request of _____ [Name of Contractor(s)] do hereby undertake to pay to the Employer an amount not exceeding Rs. _____ in the event of any breach by the said Contractor(s) of any of the terms and conditions contained in the said Contract.

We, _____ (indicate the name of the Bank), do hereby undertake to pay the amounts due and payable under this guarantee without any demur, merely on a demand from the Employer. Any such demand made on the bank, shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor(s) in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this guarantee shall be a valid discharge of our liability for payment hereunder and the Contractor(s) shall have no claim against us for making such payment.

We, further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claim satisfied or discharged or till _____⁵ or till the office/Department/Division of Bharat Heavy Electricals Limited certifies that the terms and conditions of the said Contract have been fully and properly carried out by the said contractor(s) and also including the satisfactory performance of the equipment during guarantee period and accordingly discharges this guarantee. Unless a demand or claim under this guarantee is made on us in writing on or before the _____⁶, (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all the liability under this guarantee thereafter.

We, _____ (indicate the name of the Bank) _____ further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said contractor(s) from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said contractor(s) and to forbear or enforce any of the terms and conditions relating to the said Contract and we shall not be relieved from our liability by any reason of any such variation or extension being granted to the said contractor(s) or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said contractor(s) or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

This guarantee will not be discharged due to the change in the constitution of the Bank or the Contractor(s).

We,..... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before _____⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ (indicate the name of the Bank) _____ lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

Date _____ Day of _____
for _____ (indicate the name of the Bank) _____

(Signature of Authorised signatory)

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER .

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.

2. In Case of Bank Guarantees submitted by Foreign Vendors-

- a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
- b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter-Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.

- b.2** In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
- b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
- b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

BANK GUARANTEE FOR ADVANCE

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ (hereinafter called "the Contractor" which expression shall include its successors and permitted assigns) a contract Ref No.....dated ²valued at Rs.....(Rupees -----) for <Nature of Work> ³(hereinafter called the 'Contract')

AND WHEREAS the Employer has agreed to advance to the Contractor, a sum of Rs..... (Rupees..... only), equivalent to _____% of the said value of the Contract (hereinafter called "the said Advance"), upon the condition, that the said Advance shall be secured by undertaking guarantee for Rs ----- (Rupees -----)⁴ from a Bank as hereinafter appearing.

We, ..., (hereinafter referred to as the Bank), having registered/Head office at and a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer without any demur, merely on your first demand any sum or sums upto a maximum amount but not exceeding Rs ----- (Rupees -----).

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Contractors/Supplier shall have no claim against us for making such payment.

We the Bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time on the request of the Employer for such period as may be desired by the Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms hereof. However, unless a demand or claim under this Guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this Guarantee.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank

We, ... Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Date.....

Place of Issue.....

¹ NAME OF VENDOR /CONTRACTOR / SUPPLIER

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.
2. In Case of Bank Guarantees submitted by Foreign Vendors-
 - a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2 **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3 The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4 The BG should clearly specify that the demand or other document can be presented in electronic form.

FORMS & PROCEDURES

Form No: F-13 (Rev 00)

FORM for EXTENSION OF VALIDITY OF BANK GUARANTEE

1. To be typed on non judicial Stamp Papers of value as applicable in the State of India from where the BG has been issued or the State of India where the BG shall be operated
2. The non judicial stamp papers shall be purchased in the name of the Party on whose behalf the BG is being issued or the BG issuing Bank

BANK GUARANTEE No:

Date:.....

To

(Write Designation and Address of Officer of BHEL inviting the Tender)

Dear Sir

Sub : Validity of Bank Guarantee No:..... Dated for
..... Rs in favour of yourself, expiry date, on
account of M/s in respect of Contract
Number....., (herein after called the Original bank Guarantee)

At the request of M/s....., we Bank, having its
branch Office at and having Head office at, do
hereby extend our liability under the above mentioned Bank Guarantee number..... dated
..... for a further period of Months/years from to expire on
.....

Except as provided above, all other terms and conditions of the Original Bank Guarantee No
..... Dated..... shall remain unaltered and binding on us.

Kindly treat this extension as an integral part of the original Bank Guarantee to which it would be attached.

Yours faithfully

Signature.....

Name & Designation.....

Power of Attorney/Signing Power No

Seal of Bank

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBH-C2027:20

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#1.01	Cumulative number of days in the month, the nominated Quality Officer or his authorised nominee was not available	QUALITY	1.5		Quality Officer or his authorised nominee should be available for all the days of working at site	Daily Log Book entry/Incident Registers/letter references
#1.02	Number of instances of non- compliance wrt FQP, Standard Drawings, Specifications, E&C Manuals etc.	QUALITY	1.5		No deviation from FQP, Standard Drawings, Specifications, E&C Manuals etc. is allowed without BHEL Engineer's approval.	Daily Log Book entry/Incident Registers/letter references
#1.03	Percentage submission of test certificates for batches of welding electrodes, cement, sand, aggregate, consumable, Paints etc. as applicable for this month OR In case of MM & MH package, monthly checks for Storage/Preservation of material.	QUALITY	1		Submission of 100% Test certificates for materials as per FQP is mandatory. MM & MH package: Storage/Preservation as per manual/procedure.	Daily Log Book entry/Incident Registers/letter references
#1.04	Number of incidences of improper storage & preservation (not in accordance to the guidelines of BHEL MUs or approved FQP) of materials, consumables (viz. gases, welding electrodes & fluxes, fuel etc.) & bought-out items (paints, fasteners etc.) under the custody of the contractor	QUALITY	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#1.05	Rework/ Rejection instances in a month necessitated due to deviation from Standard Drawings /Specifications /Manuals /E&C procedures /FQPs or due to Poor Workmanship by contractor	QUALITY	2		Reworks/ Rejection should be as minimum as possible. Total number of reworks/ rejections due to reasons attributable to contractor.	Daily Log Book entry/Incident Registers/letter references
#1.06	Delay in preparation & submission of signed protocols / log sheets / site register / NDT test reports as per approved FQP/ Qualified Welder List along with photocopies of Welder ID cards / Welder Performance Evaluation records etc. in the month OR in case of MM / MH package reconciliation statement / verification report.	QUALITY	1		Within 2 days of measurements taken or within first 3 working days of next month, as advised by BHEL Engineer	Daily Log Book entry/Incident Registers/letter references
#1.07	Number of instances for Major equipment/product failure due to negligence/improper work/poor workmanship by contractor	QUALITY	1		No such event should happen	Daily Log Book entry/Incident Registers/letter references
#1.08	Total number of complaints received in the month on the quality of finish / aesthetics	QUALITY	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBH-C2027:20

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#2.01	Cumulative number of days of delay in submission of Plan FOR THE MONTH supported by deployment plan of Major T&Ps and Manpower (as per Form F-14) and relevant construction/layout drawings - like A4 plan / elevation views of plan status for structures / pressure parts/Civil Works, Piping isometrics for piping, Layout / PID / System reference sketch, Unloading / storage plans etc.as applicable.	PERFORMANCE	5		Number of days delayed from second working day of the month	Daily Log Book entry/Incident Registers/letter references
#2.02	Percentage of timely submission of Daily Reports for Progress of work, Resources, Consumables etc.	PERFORMANCE	1.5		Percentage of timely submission of daily reports/ Scheduled date is successive next day for each day	Daily Log Book entry/Incident Registers/letter references
#2.03	Number of days delayed for submission of FQP log sheets / protocols / Monthly Progress Reports for the work executed during the month under measurement	PERFORMANCE	1.5		Number of days delayed/Scheduled date is first 2 working days of next month	Daily Log Book entry/Incident Registers/letter references
#2.04	Percentage Shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month as per Form-14	PERFORMANCE	35		As per Part-A of Form-14	Progress review formats
#2.05	Number of days delayed in submission of Running bills with complete supporting documents (including updated reconciliation statement of BHEL issued material) for the month	PERFORMANCE	2		Number of days delayed / Scheduled date is 7th day of next month	Daily Log Book entry/Incident Registers/letter references
#2.06	Number of times the Top Management of contractor did not respond to critical issues of site, for the month	PERFORMANCE	1		Total number of instances	Daily Log Book entry/Incident Registers/letter references
#2.07	Cumulative number of days in the month the works were stopped / refused on interpretation of contract clauses/scope due to tendency of taking undue advantage by interpreting contract clauses in their favour	PERFORMANCE	2		Cumulative number of days lost	Daily Log Book entry/Incident Registers/letter references
#2.08	Number of times rework was refused by contractor	PERFORMANCE	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBH-C2027:20

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#2.09	Cumulative number of days in the month recording / logging was not done in daily log / history register / hindrance register / soft form in a PC maintained at BHEL Site Office	PERFORMANCE	1		Cumulative number of days recording or logging was not done / all days of the month	Daily Log Book entry/Incident Registers/letter references
#3.01	Percentage of Manpower Deployed w.r.t. Plan for the month as per Form-14.	RESOURCES	7		As per Part-B2 of Form-14	Daily Log Book entry/Incident Registers/letter references
#3.02	Percentage of T&P Deployed w.r.t. Plan for the month as per Form-14.	RESOURCES	7		As per Part-B1 of Form-14	Daily Log Book entry/Incident Registers/letter references
#3.03	Cumulative number of major instances in the month hampering / affecting progress of work due to breakdown or non-availability of major T&P and MME for the work, under the scope of Contractor	RESOURCES	3		Cumulative number of instances	Daily Log Book entry/Incident Registers/letter references
#3.04	Cumulative number of major instances in the month hampering / affecting progress of work due to non-availability of Consumables/ use of improper consumables under the scope of contractor	RESOURCES	3		Cumulative number of instances	Daily Log Book entry/Incident Registers/letter references
#4.01	Number of non-compliances during the month for Statutory requirements like validity of Labour Licence, Insurance Policy, Labour Insurance, PF, BOCW Compliance etc. and any other applicable laws/ Regulation, Electrical Licence, T&P fitness certificate, Contractors' All Risk Policy etc. as applicable	SITE INFRASTRUCTURE & SERVICE	1		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#4.02	Cumulative number of days in a month poor illumination is reported at storage area, erection area, pre-assembly area and other designated areas by BHEL site.	SITE INFRASTRUCTURE & SERVICE	0.5		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references
#4.03	Cumulative number of days of non-availability of well-maintained toilets facilities for workers (separate for men and women) and non-availability of potable drinking water stations for workers in specified areas.	SITE INFRASTRUCTURE & SERVICE	1		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBH-C2027:20

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#4.04	Total number of instances in the month, Housekeeping NOT attended to in spite of instructions by BHEL -i.e. removal / disposal of surplus earth / debris / scrap / unused / surplus cable drums / other electrical items / surplus steel items / packing materials, thrown out scrap like weld butts, cotton waste etc. from the working area to identified locations	SITE INFRASTRUCTURE & SERVICE	2		Total number of non-compliances/random checks	Daily Log Book entry/Incident Registers/letter references
#4.05	Total number of instances in a month, Site Office with reasonably good facilities including enough nos. of computers and printers etc. for use by office and supporting staff was not made available/maintained.	SITE INFRASTRUCTURE & SERVICE	0.5		No discrepancy during regular or surprise visits	Photograph and report of the Engineer
#5.01	Number of days delayed in making labour payments for the last month	SITE FINANCE	2		Number of days delayed / Scheduled date is 7th day of next month	Daily Log Book entry/Incident Registers/letter references
#5.02	Number of complaints from labour/ sub supplier/ sub-contractor for non-receipt of payments from contractor	SITE FINANCE	1.5		Total number of complaints or reporting	Daily Log Book entry/Incident Registers/letter references
#5.03	Number of times the site operations were hampered for want of funds at the disposal of site-in-charge.	SITE FINANCE	1.5		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#6.01	Cumulative number of days in a month the nominated Safety Officer was not available	HSE & SA	1		Safety Officer should be available for all the days	Daily Log Book entry/Incident Registers/letter references
#6.02	Shortfall in number of weekly safety meetings in the month conducted or attended by the Safety Officer	HSE & SA	0.5		Safety meetings to be held every week	Copy of Minutes of meeting
#6.03	Level of compliance w.r.t decisions taken in previous Safety meetings	HSE & SA	0.5		Number of consolidated issues discussed in Safety meetings	Copy of Minutes of meeting, Non-compliance intimation documents from BHEL site
#6.04	Delay in submission of monthly report on safety (including electrical safety for equipment & personnel etc.) in the prescribed form	HSE & SA	1		Number of days delayed/Scheduled date is third working day of next month	Daily Log Book entry/Incident Registers/letter references
#6.05	Number of days taken for lodging FIRs from date of occurrence/notice of incident of theft / accident etc.	HSE & SA	0.5		Number of days delayed/Scheduled date is within 24 Hrs of occurrence/notice of incidence	Copy of FIR lodged by Contractor

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBH-C2027:20

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
#6.06	Number of times written(email, letters etc.) warning issued for non-availability/ use of improper Fall protection and rescue arrangement as lifeline, fall arrestors, safety net, hand-railings, covered floors, man-basket, rescue basket & kit etc. by the contractor	HSE & SA	2		Total number of non-compliances	Daily Log Book entry/Incident Registers/letter references
#6.07	Number of times punitive fines imposed for unsafe practices as per contract like non-availability/use of PPEs as safety shoes, helmets, goggles, gloves, lifeline, safety belts etc.	HSE & SA	1		Total number of non-compliances	Non-compliance intimation documents from BHEL site
#6.08	Percentage compliance to Emergency preparedness and response plan: Portable Fire-extinguishers, Buckets, Fire-wardens, display of emergency numbers, mock-drills, Hazard Identification and Risk Assessment(HIRA) etc.	HSE & SA	1		Compliance should be 100% as per HSE Plan or as finalized in Safety Meetings	Non-compliance intimation documents from BHEL site
#6.09	Number of times the agency has defaulted on display of safety posters / safety slogans / safety barriers/emergency numbers etc. in identified areas	HSE & SA	0.5		Total number of instances	Non-compliance intimation documents from BHEL site
#6.10	Non compliances observed during HSE and Safety Audit	HSE & SA	0.5		Total number of non-compliances	Non-compliance intimation documents from BHEL site, Audit Reports
#6.11	Cumulative number of days in the month, non-availability of First Aid Kit, First Aider & Emergency Vehicles/Ambulance.	HSE & SA	0.5		Cumulative number of days	Non-compliance intimation documents from BHEL site
#6.12	Number of days taken for submission of Root Cause analysis (RCA) for the accident from the cut-off date intimated by BHEL for submission of RCA	HSE & SA	0.5		Number of days delayed/Scheduled date is cut-off date intimated by BHEL	Daily Log Book entry/Incident Registers/letter references
#6.13	Non conductance of training (induction, job specific, height work etc.), tool box meeting and health check-up as per Contract requirements	HSE & SA	0.5		Number of incidences of non-conductance during the month	Daily Log Book entry/Incident Registers/letter references
Total			100			

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBH-C2027:20

Project		Vendor			Package/Unit	
Sl. No.	Parameter for Measurement	Classification	Max Score	Score Obtained	Measurement Key/Scheduled date	Supporting Documents
	Less Deduction in Score Due to Major Accidents (Fatal, Permanent Disability or bodily injury by which person injured is prevented to resume to work within 48 hours or more after accident,, Major Damage to Equipment etc.) attributable to the contractor @ 3 points/ accident					
	Less Deduction in Score Due to Minor Accidents attributable to the contractor @ 1 point/ accident					
	Less Deduction in Score Due to not Maintaining of Labour Colony (if applicable) as per BHEL HSE policy @2 points in a month on verification any day					
	Final Score					

Performance Score Summary for the Month	Total Score	Score Obtained
QUALITY	10	
PERFORMANCE	50	
RESOURCES	20	
SITE INFRASTRUCTURE & SERVICE	5	
SITE FINANCE	5	
HSE & SA	10	
OTHERS (deductions if any)	0	
TOTAL	100	

Note:

- 1) It is only indicative and shall be as per the online format issued by BHEL time to time.
- 2) No request will be entertained after specified date of current month w.r.t. changes requested in the scores of immediate previous month.

FORMS & PROCEDURES

Form No: F-19 (Rev 00)

MILESTONE COMPLETION CERTIFICATE **(issued by BHEL on the specific request of Contractor)**

Ref :

Date:

To,

(Name & address of Contractor)

Dear Sir,

References

1. Contract No:
2. Job Description:

This is to hereby confirm that the following Milestone Activity has been achieved in respect of the Contract /Job under reference

Sl No	Milestone Activity	Remarks

This certificate is issued as per your request vide letter no
without any prejudice to the rights of BHEL in line with the terms and conditions of the
above referred Contract

Yours faithfully,

For and on behalf of Bharat Heavy Electricals Limited

Construction Manager/Head (Subcontracts)

FORMS & PROCEDURES

Form No: F-20 (Rev 01)

CONTRACT COMPLETION CERTIFICATE (Issued by BHEL/HQ on the specific request of Contractor)

Ref :

Date:

To Whom so ever it may concern

1	DESCRIPTION OF WORK	
2	NAME AND ADDRESS OF THE CONTRACTOR	
3	CONTRACT NO	
4	CONTRACT VALUE	
5	LETTER OF INTENT NO & DATE	
6	CONTRACT PERIOD//CONTRACT DURATION	
7	DATE OF START/COMPLETION	
8	FINAL EXECUTED VALUE	
9	PERFORMANCE	GOOD SATISFACTORY UNSATISFACTORY

This certificate is issued as per your request vide letter no
without any prejudice to the rights of BHEL to use this certificate for evaluation of your offers for future
tenders

Yours faithfully,

For and on behalf of Bharat Heavy Electricals Limited

Head (Subcontracts)

FORMS & PROCEDURES

Form No: F-21 (Rev 00)

INDEMNITY BOND

(To be executed on a Non Judicial Stamp Paper of the requisite value as per Stamp Duty prevalent in the respective State)

This Indemnity Bond executed by <name of company> having their Registered Office at <xxxxxxxxxxx> in favour of M/s Bharat Heavy Electricals Limited, a Company incorporated under the Companies Act, 1956, having its Registered Office at BH EL House, Siri Fort, Asiad, New Delhi - 110049 through its Unit at Power Sector _____ Region, _____, _____ State.
(Hereinafter referred to as the Company)

And whereas the Company has entered into a Contract with M/s xxxxxxxxxx, the executants of this Deed (hereinafter referred to as the Contractor) as its contractor in respect of the work of "xxxxxxxxxxxxxxxxxxxxxxxxxxxxxx".

AND WHEREAS under the provisions of G C C further stipulates that the Contractor shall indemnify the Company against all claims of whatever nature arising during the course of execution of Contract including defects liability period of <xx Months> i.e till <xx xx xxxx>

Now this deed witnesses that in case the Company is made liable by any Authority including Court to pay any claim or compensation etc. in respect of all labourers or other matters at any stage under or relating to the Contract with the Contractor, the Contractor hereby covenants and agrees with the Company that they shall indemnify and reimburse the Company to the extent of such payments and for any fee, including litigation charges, lawyers' fees, etc, penalty or damages claimed against the Company by reason of the Contractor falling to comply with Central/States Laws, Rules etc, or his failure to comply with Contract (including all expenses and charges incurred by the Company).

The Contractor further indemnifies the Company for the amount which the Company may be liable to pay by way of penalty for not making deductions from the Bills of the Contractor towards such amount and depositing the same in the Government Treasury.

FORMS & PROCEDURES

The Contractor further agree that the Company shall be entitled to with hold and adjust the Security Deposit and/or with ho ld and adjust payment of Bills of Contractor pertaining to this Contract against any payme nt which the Company has made or is required to mak e for which the Contractor is liable under the Contract and that such amount can be withheld, adjusted by the Company till satisfactory and final settlement of all pending matters and the Contractor hereby gives his consent for the same.

The Contractor further agrees that the terms of indemnity shall s urvive the termination or completion of this contract.

The contractor further agrees that the liability of the contractor shall be extended on actual basis notwithstanding the limitations of liability clause, in respect of :

1. breach of terms of contract by the contractor
2. breach of laws by the contractor
3. breach of Intellectual property rights by the contractor
4. breach of confidentiality by the contractor

Nothing contained in this deed, shall be construed as absolving or limiting the liability of the Contractor under said Contract between the Company and the Contractor . That this Indemnity Bond is irrevocable and the condition of the bond is that the Contractor shall duly and punctually c omply with the terms and the conditions of this deed and contractu al provisions to the satisfaction of the Company.

In witness where of M/s xxxxxxxxxxxxxx these presents on the day, month and year first, above written at xxxxxxxx by the hand of its signatory Mr. xxxxxxxxxxxx.

Signed for and on behalf of
M/s xxxxxxxxxxxxxxxxxxxx

Witness:

1
2

FORMS & PROCEDURES

Form No: F-22 (Rev 00)

CONSORTIUM AGREEMENT

(To be executed on Rs. 50/- Non – Judicial Stamp Paper)

THIS AGREEMENT is made and executed on this _____ day of _____, by and between (1) M/s _____, (The First Party, i.e, the Bidder) a company incorporated under the Company's Act 1956, having its registered office at _____ (herein after called the "Bidder", which expression shall include its' successors, administrators, executors and permitted assigns) and (2) M/s _____, (The Second Party, i.e, the associates), a company incorporated under the Company's Act 1956, having its registered office at _____ (herein after called the " Associates", which expression shall include its' successors, administrators, executors and permitted assigns).

WHEAEAS the Owner, Bharat Heavy Electricals Ltd, a Government of India Undertaking, proposes to issue / issued an NIT (herein after referred to as the said NIT) inviting bids from the individual Bidders for undertaking the work _____ of _____ at _____ (herein after referred to as the said works).

WHEREAS the said NIT enables submission of a bid by a Consortium subject to fulfillment of the stipulations specified in the said NIT.

AND WHEREAS M/s _____ (The First Party, i.e, the Bidder) will submit its proposal in response to the aforesaid invitation to _____ bid by the Owner for _____ as detailed in the Bid doc. no. < TENDER REF----->

FORMS & PROCEDURES

AND WHEREAS M/s _____ (The First Party, i.e the Bidder) itself is meeting all the qualifying requirements except the qualifying requirements of _____ (as detailed in the NIT) and in order to fully meet the qualifying requirements of NIT, this tie-up agreement is _____ being entered into with M/s _____ (The Second Party, the Associates), who fully meet the balance part of the said work _____ (_____).

WHEREAS the First Party and the Second Party are contractors engaged in the business of carrying out various items of works. WHEREAS the two parties have agreed to constitute themselves into a consortium for the purpose of carrying out the said works, and that the consortium will be continued till the completion of the works in all respects.

WHEREAS the parties have agreed to certain terms and conditions in this regard:

NOW THEREFORE THIS AGREEMENT WITNESSETH AS FOLLOWS :

1. First and Second parties hereby constitute themselves into a Consortium for the purpose of bidding and undertaking the said works pursuant to the said NIT as hereinafter stated.
2. The First Party will be the leader (Lead Partner) and will be responsible for the entire works.

FORMS & PROCEDURES

CONSORTIUM AGREEMENT

3. The First Party shall undertake the following part(s) of work detailed in _____ the NIT namely _____
4. The Second Party shall undertake the following part(s) of work detailed _____ in the said NIT namely _____
5. The parties hereby declare and confirm that each of them will fulfill the required minimum qualifying requirements as prescribed in the said NIT for the works agreed to be undertaken by them as stated here-in-above.
6. It is also agreed between the parties hereto that all of them shall be individually and severally responsible for the completion of the said works as per the schedule. Further, if the Employer/Owner sustains any loss or damage on account of any breach of the Contracts, we the, Consortium partners individually and severally undertake to promptly indemnify and pay such losses / damages caused to the Employer/Owner on its written demand without any demur, reservation, contest or protest in any manner whatsoever.
7. The parties hereby agree and undertake that they shall provide adequate finances, suitable Tools, Plants, Tractors, Trailers, other transportation equipment, other Tools & Plants, Measuring & Monitoring Equipments (MMEs), Men and Machinery etc. for the proper and effective execution of the works to be undertaken by them as specified here-in-above.

FORMS & PROCEDURES

8. It is agreed interse between t he parties hereto that all the consequences liabilities etc., arising out of any default in the due execution of the said works shall be borne by the party in default, that is by party in whose area of works default has occurred, provided however, so far as M/s Bharat Hea vy Electricals Limited is concerned, all the parties shall be liable jointly and severally.

IN WITNESS HEREOF the parties above named have signed this agreement on the day month and year first above written at _____(Place) .

WITNESS

For

1. NAME (FIRST PARTY)

2. OFFICIAL ADDRESS

WITNESS

For

1. NAME (SECOND PARTY)

2. OFFICIAL ADDRESS

[The successful bidder shall have to execute the " JOINT DEED OF UNDERTAKING " in the format to be made available by BHEL at the time of awarding].

FORMS & PROCEDURES

Form No: F-23 (Rev 00)

REFUND OF SECURITY DEPOSIT

To,
The Construction Manager
BHEL Site Office

Dear Sir,

Sub : **Refund of Security Deposit**

Ref : Contract No:

Work:.....

I/We have submitted Final Bill in respect of the above Contract/Work vide our letter no:.....
dated In line with Tender conditions (GCC clause no 1.11), kindly arrange to
release/refund the Security Deposit along with Final Bill payments.

The details of Security Deposit are as below:

1. Cash Portion :
2. BG Portion :

Thanking You

Date: _____

Authorised representative of Contractor

To be filled up by BHEL

1. Security Deposit to be refunded:
 - a. Cash Portion:
 - b. BG Portion :
2. Less
 - a. Amount spent by BHEL on behalf of Contractor:
 - b. Payments made by BHEL on behalf of Contractor:
 - c. Other recoveries for Services etc
 - d. Any other recoveries
 - e. Total of 'a' to 'd':
3. Net Amount to be released (1-2) :
4. Certified that
 - a. The payment recommended for release is in order and there are no demands other than those included in the claim outstanding from the Contractor
 - b. Contract Guarantee period of Months commenced wef : _____
 - c. All objections raised so far have been settled
 - d. A note for refund of Security Deposit has been made in the Measurement Book

Signature of BHEL Engineer

Construction Manager

Date:-----

FORMS & PROCEDURES

Form No: F-24 (Rev 00)

REFUND OF GUARANTEE MONEY

BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR, _____ REGION

Ref No:

Date:

1. Name and Address of Contractor :
2. Contract Agreement/LOI No :
3. Date of Contract Agreement/LOI :
4. Name of the Work undertaken :
5. Date of commencement of the Work :
6. Date of Completion of the Work :
7. Period of Maintenance :
(Guarantee Period)
8. Date on which the Final Bill was paid :
9. Last date of making good the defect :
during Maintenance Period
10. Expenditure incurred by BHEL during :
Maintenance Period, if any, recoverable
11. Date on which Guarantee Money refund:
falls due as per Contract
12. Amount of Guarantee Money to be refunded:
13. Less Amounts recoverable (with details)
 - a. Amount spent by BHEL on maintenance :
 - b. Payments made by BHEL on behalf of Contractor:
 - c. Court dues/penalties/compensation :
 - d. Other recoveries for Services, etc :
 - e. Total of 'a' to 'd' :
14. Net Amount recommended for release (12-13) :

FORMS & PROCEDURES

Signature of BHEL Engineer

Date: _____

CERTIFICATE TO BE FURNISHED BY THE CONTRACTOR

I/We have no claim or demand outstanding against BHEL _____, for the work done or for labour or material supplied or any other account arising out of or connected with the Contract Agreement/LOI (No _____ dated _____) and the payment of this bill shall be in full and final settlement of all my/our claims and demands including the 'Deposits' of the Contract Agreement/LOI referred to.

Signature of Contractor

Date: _____

CERTIFICATE TO BE FURNISHED BY SENIOR ENGINEER/CONSTRUCTION MANAGER

1. Certified that
 - a. The payment recommended for release is in order and there are no demands other than those included in the claim outstanding from the Contractor
 - b. Maintenance period (Contract Guarantee period) is over and the Contractor has carried out the works required to be carried out by him during the period of maintenance (Guarantee) to our satisfaction, and all expenses incurred by the Company on carrying out such works have been included for adjustment
 - c. All objections raised so far have been settled
 - d. A note for refund of Guarantee Amount has been made in the Measurement Book and Contract Agreement/Work Order

Signature of BHEL Engineer

Construction Manager

Date:-----

FOR USE IN ACCOUNTS DEPARTMENT

Passed for Rs _____ (Rupees _____ only)

Accountant

Accounts Officer

ACKNOWLEDGE BY THE CONTRACTOR

Received Rs _____ in full and final settlement of my/our claim

Signature of Contractor

Date: _____

FORMS & PROCEDURES

Form No: F-25 (Rev 00)

POWER OF ATTORNEY for SUBMISSION OF TENDER/SIGNING CONTRACT AGREEMENT

(To be typed on non judicial Stamp Papers of appropriate value as applicable and Notarised)

KNOW ALL MEN BY THESE PRESENTS, that I/We do hereby make, nominate, constitute and appoint Mr , whose signature given below herewith to be true and lawful Attorney of M/s..... hereinafter called 'Company', for submitting Tender/entering into Contract and inter alia, sign, execute all papers and to do necessary lawful acts on behalf of Company with M/s Bharat Heavy Electricals Ltd, Power Sector _____ Region, _____, in connection with

.....
.....
..... vide Tender Specification No :
_____, dated _____.

And the Company do hereby agree to ratify and confirm all acts, deeds, things or proceedings as may be lawfully done by the said attorney and by or on behalf of the company and in the name of the company, by virtue of the powers conferred herein and the same shall be binding on the company and shall have full force and effect.

IN WITNESS WHEREOF the common seal of the company has been hereunto affixed in the manner hereinafter appearing on the document.

Dated at _____, this _____ day of _____

Director/CMD/Partner/Proprietor

Signature of Mr.....(Attorney)

Attested by: Director/CMD/Partner/Proprietor

Witness

Notary Public

FORMS & PROCEDURES

Form No: F-26 (Rev 00)

ANALYSIS OF UNIT RATES QUOTED

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

Offer Reference No:.....

Date:.....

To,
(Write Name & Address of Officer of BHEL inviting the Tender)

Dear Sir,

Sub : Analysis of Unit Rates Quoted

Ref : Tender Specification No:

Analysis of Unit Rates quoted by us in respect of above Tender is as detailed

SN	DESCRIPTION	% OF QUOTED RATE	REMARKS
01	SITE FACILITIES VIZ., ELECTRICITY, WATER OTHER INFRASTRUCTURE.		
02	SALARY AND WAGES + RETRENCHMENT BENEFITS		
03	CONSUMABLES		
04	T&P DEPRECIATION & MAINTENANCE		
05	ESTABLISHMENT & ADMINISTRATIVE EXPENSES		
06	OVERHEADS		
07	PROFIT		
	TOTAL	100%	

Yours faithfully,

(Signature, Date & Seal of Authorized
Representative of the Bidder)

FORMS & PROCEDURES

Form WAM 6

BHARAT HEAVY ELECTRICALS LIMITED DIVISION.....

Running Account Bill

(Para 4.31.1 of Works Accounts Manual)

Name of the Contractor:
Name of the Work:
Sanctioned Estimate:
Code No:
Contract Agreement No :

Dated:

Departmental Bill no:
Division:
Date of written order to commence the work :
Date of commencement of the Work:
Due date of completion as per Agreement:

Date:
Sub-Division:

1. ACCOUNT OF WORK EXECUTED

On account payment for work not previously previously measured**			Item No of	Description of Work	Quantity as per agree- ment	Quantity executed up to date	Rate	Unit	Payment on the basis of actual measure- ment up to date	Quantity since last running account bill	Payment on the basis of actual measurement since last running account bill	Remarks
Total As per Running Account bill	since last running account bill	Total up to date										
Rs.	Rs.	Rs.					Rs.	P.	Rs.	P.	Rs.	P.
1	2	3	4	5	6	7	8	9	10	11	12	13

- * *1. Whenever payment is made on 'on account' basis without actual measurements the amount in whole rupees should be entered in columns 1 to 3 only and not in columns 7 to 12.
2. whenever there is an entry in column 12 on the basis of actual measurement, the whole of the amount previously paid without detailed measurement should be adjusted by a minus entry in column 2 equivalent to the amount shown in column 1, so that the total up to date in column 4 may become nil.

FORMS & PROCEDURES

Form WAM 6 (contd...)

1	2	3	4	5	6	7	8	9	10	11	12	13

Total value of work done up to date (A) ...

Running Account Bill Deduct value of work shown on the last (B) ...

Net value of work done since last (C) ...

Rupees (in words)

.....only.

FORMS & PROCEDURES

Form WAM 6 (contd...)

II.MEMORANDUM OF PAYMENTS

		Rs.	P.		I	II
					Rs.	P.
1.Total value of work actually measured as per Account No. I. Column 10	(A)					
2.Total up to date 'on account' payment for work covered by approximate Or plan measurements as per Account No. I, Column 3	(B)					
3.Total up to date secured advances on security of materials as per column 8 Of the enclosed Account (Form WAM 10)	(C)					
4.Total up to date payments [(A) + (B) + (C)]	(D)					
5.Total amount of payments already made as per Entry (D) of last Running Account Bill No..... Dated.....forwarded to the Accounts Office on	(E)					
6.Balance [(D)-(E)]						
7.Payments now to be made:						
a) by cash/cheque						
b) by deduction for value of materials supplied						
c) by BHEL vide Annexure A attached						
d) by deduction for hire of tools and plant vide						

FORMS & PROCEDURES

Annexure B attached		
e) by deduction for other charges vide Annexure C		
Attached		
f)by deduction on account of security deposit		
h) by deduction on account of Income Tax		

Note: Amounts relating to items 4 to 6 above should be entered in column II and those relating to item 7 in column I. The amount shown against item 6 and the total of item 7 should agree with each other.

III.CERTIFICATE OF THE ENGINEER IN CHARGE

Form WAM 6 (contd...)

1. The measurements on which the entries in column 7 to 12 of Part I of this Bill (Account of work executed) are based were made by.....and are recorded at pages.....of
(Name and Designation)

Measurement Book No

2. Certified that the methods of measurement are correct and the work has been carried out in accordance with the terms and conditions, schedules, specifications and drawings etc, forming part of the contract agreement, subject to deviations included in the deviation statement (Annexure D).
3. Certified that in addition to and quite apart from the quantities of work actually executed as shown in column 10 of Part I, some work has actually been done in connection with several items and the value of the such work is, in no case, less than 'on account' payments as per column 3 of Part I, made or proposed to be made, for the convenience of the contractor in anticipation of, and subject to the results of, detailed measurement which will be made as soon as possible.

Signature of Contractor

Signature of Engineer in charge

Date:

Designation:

Date:

FORMS & PROCEDURES

IV. CERTIFICATE OF THE SENIOR ENGINEER

1. Certified that measurements have been check measured to the prescribed extent by at site and also by the undersigned and the relevant entries have been intialled in the Measurement book. (vide pages.....)
(Name and Designation)
2. Certified that all the measurements recorded in the measurement book have been correctly billed for
3. Certified that all recoberable amounts in respect of materials tools and plant etc, and other charges have been correctly made vide Annexures A to C attached.
Certified for payment * of Rs.....(Rupees.....only)
To be paid in cash/by cheque in the presence of

ALLOCATION

The expenditure is chargeable as under and to be included in the accounts for.....20.....

Ledger Head	Debit (Gross amount)	Credit (Deductions)

Rs. P.

Rs. P.

Total

* Here specify the net amount payable.

Signature of Senior Engineer
Date:

Form WAM 6 (contd...)

V.ENTRIES TO BE MADE IN THE ACCOUNTS OFFICE

Accounts Bill No Dated.....
Entered in Journal Book vide entry No.....Dated.....
Passed for.....Rs.....
Less Deductions.....Rs.....
Net Amount Payable.....Rs.....
(Rupees.....only)
Payable to Shri/M/s.....by cheque/cash
Entered in Contractor's Ledger No.....Page.....

ALLOCATION

Estimate No: Code no:

Name of the Work:

Ledger Head	Debit (Gross amount) Rs. P.	Credit (Deductions) Rs. P.
-----	-----	-----
-----	-----	-----

FORMS & PROCEDURES

Assistant Date:	Accountant Date:	Account Officer Date:	Total	-----	-----

VI. Received Rs.....(Rupees.....only) as per
Memorandum of Payments on account of this work.

Signature of witness Address :	Revenue	Stamp Signature of Contractor Date:

VII. ENTRIES TO BE MADE BY TREASURY SECTION

Cash Book entry No. and date:	Amount paid	Rs.....
	Amount unpaid	Rs.....
	Total	Rs.....
	Signature of Cashier	
	Date:	

Form WAM 6 (contd...)

ANNEXURE A

FORMS & PROCEDURES

Statement showing details of materials issued to the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No.	Stores issue Voucher No. and date	Issue voucher No. and date allotted by stores to the SIV	Description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Whether recoverable from the contractor or supplied free	If recoverable from the contractor				REMARKS
							Rate at which recoverable	Amount recoverable	Amount recovered up to previous bill	Balance now recovered	
							Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8	9	10	11	12
Total											

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE B

Statement showing tools and plant issued to the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No	Description of tools and plant issued	Period for which	Rate at which	Amount recover-	Amount recovered	Balance now	Remarks
		Issued	recovery	able	upto	recovered	
			Is to be		previous		
			Made		bill		
			Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8

Total

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE C

Statement showing details of other recoveries to be made from the contractor Shri/M/s.....

In respect of Contract Agreement No Dated.....

Sl. No	Particulars	Unit	Quantity	Rate	Amount recover- able	Amount recovered upto pre- vious bill	Amount now recovered	Remarks
				Rs. P.	Rs. P.	Rs. P.	Rs. P.	
1	2	3	4	5	6	7	8	9

1. Water Charges
2. Electricity charges
3. Seignorage charges
4. Medical charges
5. Cost of empty gunny bags and
Empty containers not returned
- 6.
- 7.
- 8.
- 9.

FORMS & PROCEDURES

10.

Total

Signature of contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

FORMS & PROCEDURES

Form WAM 6 (contd...)

ANNEXURE D

Name of the Contractor:
Name of the Work:

Contract Agreement No:
Date:

Sl. No.	Description of item	Unit	Quantity as per Agreement	Quantity as executed	Quantity further anticipated	Total quantity anticipated on completion	Rate as per agreement Rs. P.
1	2	3	4	5	6	7	8

Rate as the executed with any Rs. P.	Amount as per agreement Rs. P.	Amount as executed Rs. P.	Amount further anticipated Rs. P.	Total amount anticipated on completion Rs. P.	Difference Excess savings Rs. P. Rs. P.	Reason for deviation authority, if
9	10	11	12	13	14 15	16

Signature of Engineer in Charge
Date:

Signature of Senior Engineer
Date:

FORMS & PROCEDURES

[illegible]

[illegible]

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBK-C2027:20

II MEMORANDUM OF PAYMENT												
										Rs.	P	
1	Total Value of work actually measured as per Account no I column 10 (A)											
2	Deduct amount of paym,ents already made as per last running account bill No Dated..... Forwarded to the Accounts Office on (B)											
3	Payments now to be made { (A) - (B)} (C)											
4	Deduct ammounts recoverable from the contractor on account of :								Rs	P		
	a	Material suplied by BHEL vide annexure A attached										
	b	Hire of Tools & Plants vide Annexure B attached										
	c	Other charges vide Annexure C attached										
	d	Income Tax										
	Total deduction											
5	Balance											
6	Refund of 50% of security deposite on completion of work											
7	Net amount to be paid to the Contractor											
III. CERTIFICATE OF THE ENGINEER IN CHARGE												
1	The measurement on which the entries in coulms 7 to 12 of Part I of this bill (Account of work executed) are based were made by (Name and designation)											
2	A statement showing the quantities of stores issued to the contractor (whether free or on recovery basis) and their disposal is attached.											
	Date:								Signature of Engineer in charge			
									Designation			

[illegible]

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBK-C2027:20

V. ENTRIES TO BE MADE IN THE ACCOUNTS OFFICE												
Account Bill no..... Dated						ALLOCATION						
Entered in Journal book vide entry No.....Dated.....						Estimate No: Code No						
Passed for.....Rs.....						Name of the Work						
Less Deductions.....Rs.....												
(Rupees.....Only)												
Payable to Shri/M/s..... by cheque/cash												
Entered in contractors' Ledger no..... Page												
Assistant		Accountant		Accounts officer								
Date:		Date:		Date:								
VI. Received Rs.....(Rupees.....Only) in full and final settlement of all moneys due under this contract and I / we have no further claims of this contract.												
Signature of Witness Address												
Revenue Stamp Signature of Contractor Date:												
VII . ENTRIES TO BE MADE BY TREASURY SECTION												
Cash book entry no and date : Amount Paid Rs..... Amount unpaid Rs..... Total Rs.....												
Signature of Cashier Date:												

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBN-C2027:20

BHARAT HEAVY ELECTRICALS LIMITED DIVISION..... And Final bill (Para 4.3.2 Of Works Accounts Manual)														
Name of Contractor							Departmental Bill no				Date			
Name of the Work							Division				Division			
Sanctioned Estimate							Date of written order to commence the work							
Contract Agreement/work Order No							Date of commencement of work							
							Due date of completion as per agreement							
							Date of actual completion of the work							
I. ACCOUNT OF WORK EXECUTED														
On Account payment for the work not previously measured **										Payment on the basis of actual measurement up to date Rs P	Quantity since last running account bill	Payment on the basis of actual measurement since last running account bill Rs P		
Total as per last running account bill Rs.	Since last running account bill Rs	Total up to date Rs												
1	2	3	4	5	6	7	8	9	10	11	12	13		

BHARAT HEAVY ELECTRICALS LIMITED,
POWER SECTOR - EASTERN REGION, KOLKATA
TENDER NO. PSER:SCT:NBN-C2027:20

1	2	3	4	5	6	7	8	9	10	11	12	13

Total Value of Work Done up to date (A)	
Deduct Value of work shown on the last running account bill (B)	
Net value of work done since last running account bill (C)	

Rupees (In Words).....Only

II MEMORANDUM OF PAYMENT

		Rs.	P
1	Total Value of work actually measured as per Account no I column 10	(A)	
	Deduct amount of payments already made as per last running account bill No Dated.....		
2	Forwarded to the Accounts Office on	(B)	
3	Payments now to be made { (A) - (B) }	(C)	
4	Deduct amounts recoverable from the contractor on account of :	Rs	P
	a Material supplied by BHEL vide annexure A attached		
	b Hire of Tools & Plants vide Annexure B attached		
	c Other charges vide Annexure C attached		
	d Income Tax		
	Total deduction		
5	Balance		
6	Refund of 50% of security deposit on completion of work		
7	Net amount to be paid to the Contractor		

III. CERTIFICATE OF THE ENGINEER IN CHARGE

The measurement on which the entries in columns 7 to 12 of Part I of this bill (Account of work executed) are based were made by

1	(Name and designation)
2	A statement showing the quantities of stores issued to the contractor (whether free or on recovery basis) and their disposal is attached.

Date:

Signature of Engineer in charge
Designation

IV CERTIFICATE OF THE SENIOR ENGINEER

- 1 Certified that I have personally inspected the work and that the work has been physically completed on the due date in accordance with the terms and
Cretified that the measurements have been check measured to the prescribed extent by
..... (Name & designation). And by the the undersigned at site and relevent entries have been initiated in the measurement book (vide
2 pages.....)
- 3 Certified that the methods of measurement are correct
- 4 Certified that the measurements have been technically checked with reference to contract drawings, deviations etc
- 5 Certified that all the measurements recorded in the measurement book have been correctly billed for at the contract rates or approved rates.
- 6 Certified that all the recoverable amounts in respect of stores, tools and pallant, elwater, electricity charges etc, have been correctly made vide Annexures A
- 7 Certified that the issues of all stores as per statement atytached (whether charged to the contractor or direct to the work) have been technically checked and

Certified for payment of * Rs (Rupees.....) (Only). To be paid in
cash/by cheque in the presence of

ALLOCATION

The expenditure as under and to be included in the accounts for 19

Ledger Head	Debit (Gross Amount)		Credit (Deduction)	
	Rs.	P	Rs.	P
.....				
Total				

* Here specify the net amount payable

Signature of Senior Engineer
Date

V. ENTRIES TO BE MADE IN THE ACCOUNTS OFFICE

Account Bill no..... Dated
Entered in Journal book vide entry No.....Dated.....
Passed for.....Rs.....
Less Deductions.....Rs.....
(Rupees.....Only)
Payable to Shri/M/s..... by cheque/cash
Entered in contractors' Ledger no..... Page

ALLOCATION		Code No
Estimate No:		
Name of the Work		
Ledger Head	Debit (Gross Amount) Rs P	Credit (Deduction) Rs
.....		
Total		

Assistant	Accountant	Accounts officer
Date:	Date:	Date:

VI. Received Rs.....(Rupees.....Only) in full and final settlement of all moneys due under this contract and I / we have no further claims of this contract.

Signature of Witness
Address

Revenue Stamp
Signature of Contractor
Date:

VII . ENTRIES TO BE MADE BY TREASURY SECTION

Cash book entry no and date :

Amount Paid Rs.....
Amount unpaid Rs.....
Total Rs.....

Signature of Cashier
Date:

ANNEXURE A

Part I

Statement showing details of material issued to the contractor Shri/M/s..... In respect of Contract Agreement/Work Order No..... Dated

SI No	Stores Issue voucher No and date	Issue voucher No and date alloted by stores to the SIV	description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Whether recoverabl e from the contractor or supplied free	Rate at		If recoverable from contractor				Remarks		
							which		Amount		Amount			Balance	
							recoverable		Recoverabl		upto			Now	
							Rs	P	Rs	P	Rs	P		Rs	P
1	2	3	4	5	6	7	8	9	10	11	12				

Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE A

Part II

Statement showing details of material issued to the contractor Shri/M/s..... in respect of Contract Agreement/Work Order No..... Dated and not covered by the agreement

SI No	Stores Issue voucher No and date	Issue voucher No and date alloted by stores to the SIV	description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Issue Rate		Amount Recoverabl e		Amount recoverable upto previous bill		Balance Now recovered		Remarks
						Rs	P	Rs	P	Rs	P	Rs	P	
1	2	3	4	5	6	7		8		9		10		11

Total
Add Departmental Charges
Add Sales Tax (wherever applicable)
Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE B

Statement showing TOOLS & PLANTS issued to the contractor Shri/M/s..... in respect of Contract Agreement/Work Order No..... Dated and not covered by the agreement

SI No 1	Description of tools & plants issued 2	Period for which issued 3	Rate at which Recivry is to be made 4	Amount recoverabl e Rs P 5		Amount recoverable upto previous bill Rs P 6		Balance Now recovered Rs P 7		Remarks 8

Total

Signature of Contractor
Date

Signature of Engineer in charge
Date

Signature of Senior Engineer
Date

ANNEXURE C

showing detail of other recoveries to be made from the contractor Shri/M/s.....
ment/Work Order No.....Dated.....

Sr.No	Particulars	Unit	Quantity	Rate Rs. P.	Amount recoverable Rs. P	Amount recovered upto previous bill Rs. P.	Amount now recovered Rs. P.	Remarks
1	2	3	4	5	6	7	8	9
	1 Water Charges							
	2 Electricity Charges							
	3 Seignorage Charges							
	4 Medical Charges							
	Cost of empty gunny bags and empty containers not 5 returned							
	6							
	7							
	8							
	9							
	10							
Total								
Signature of Contractor			Signature of Engineer Incharge			Signature of Sr. Engineer		
Date			Date			Date		

Form WAM 7 (Contd.)

ANNEXURE D -
DEVIATION STATEMENT :

Name of the Contractor :

Contract Agreement/Work Order No. :

Name of the Work :

Date :

Sl. No.	Description of item	Unit	Quantity as per agreement	Quantity as executed	Rate as per agreement Rs. P.	Rate as executed Rs. P.	Amount as per agreement Rs. P.	Amount as executed Rs. P.	Difference		Reason for the deviation with authority, if any
									Excess	Savings	
1	2	3	4	5	6	7	8	9	10	11	12

Signature of Engineer in Charge

Date :

Signature of Senior Engineer

Date :

ANNEXURE E

Statement showing the consumption of materials issued to the contractor Shri/M/s.....
in respect of Contract Agreement/Work Order No..... Dated.....

Name of the Work :

ON RECOVERY BASIS

Sl. No.	Description of material	Unit	Quantity actually issued	Quantity actually incorporated in the work	Balance	Particulars of disposal of balance	Quantity to be issued as per approved data for work actually done	Variation in consumption (Difference between column 5 and 8)		Rate chargeable for excess/short consumption, if any	Amount recoverable for excess/short consumption, including materials not returned
								More	Less	Rs. P.	Rs. P.
1	2	3	4	5	6	7	8	9	10	11	12
1.	Cement										
2.	Bricks										
3.	Wood.....										
4.	Asbestos Sheet										
5.	Iron Materials										
6.											
7.											
8.											
9.											
10.											

Signature of Contractor

Date :

Signature of Engineer in Charge

Date :

Signature of Senior Engineer

Date :

Note : 1. The quantities shown in columns 4 and 5 above should tally with those shown in columns 5 and 6 respectively of Annexure A (Part I and II).

2. Data statement of theoretical consumption should be attached in support of quantity specified in column 8.

ANNEXURE F

Statement showing detail of materials issued to the contractor Shri/M/s.....

Subject of Contract Agreement/Work Order No. Dated

Name of work;

FREE OF COST

Sr.No	Stores issue voucher No.	Description of material	Unit	Quantity issued	Quantity required as per data	Quantity consumed in the work	Balance(If any)	Nature of disposal for the balance	Rate chargeable for material not returned Rs.P.	Amount recoverable for material not returned Rs. P	Remarks
1	2	3	4	5	6	7	8	9	10	11	12

Total

Signature of Contractor
Date

Signature of Engineer Incharge
Date

Signature of Sr. Engineer
Date

Note: Data statement of therotical consumption should be attached in support of the quantity specified in coloumn 6

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Name of the work :	
Name of the Contractor :	
Date of commencement of the work:	
Contract agreement/work ordered no. and date:	
Reference to supplementary agreement no,if any :	
Whether administrative approval and technical sanction has been accorded by the competent authority ? If so ,cite reference	
Whether sanction of the competent authority and financial concurrence of the Accounts Department for award of the work has been accorded ? If so,cite reference.	
Whether the work has been completed in time ? If not ,whether penalty has been levied or sanction of the competent authority for extension of time granted and communicated to the Accounts Department with reasons for grant of extension? (Due and actual date of completion of the work and reference to letter no. and date granting the extension of time should be given)	
(a) Whether the rates allowed in the bill have been checked with the contract agreement ? (b) Whether the rates for extra/supplemental items have been approved by the competent authority and the sanction communicated to the accounts Department together with rate analysis? If so,cite reference.	
Whether deviations have been approved by the competent authority? If yes, give reference to the approval; if not, give reasons.	
Whether the rates of recovery of stores issued to the contractor which are not provided for in the Contract Agreement have been settled in consultation with Finance?	
Whether discrepancies pointed out by the Accounts Department in the store statement have been reconciled and accepted by the Accounts Department?	

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Whether materials issued to the contractor in excess of the theoretical requirements have been returned to the Stores Department and the no. and date of such returned stores vouchers have been shown in stores statement? If not, whether the cost of such excess material has been recovered at the prescribed rate? Whether consumption statements in respect of materials chargeable to the work have been attached to the bill?	
Whether consumption of materials shown has been technically checked by Senior Engineer?	
Whether materials issued and used in the work is not less than that required for consumption in work according to our specification? If consumption is less, whether necessary recovery has been made in the bill?	
Whether measurements have been checked by the Engineer and Sr. Engineer to the extent required and certificates of check recorded in the measurement books?	
Whether contractor has signed the bill and the measurement books without reservations? If not, whether reasons have been intimated to the Accounts Department?	
Whether arithmetical calculations have been checked and certificate recorded in the measurement books by a person other than the one who calculated initially	
Whether any work was done at the risk and cost of the contractor and whether such cost has been recovered from him? Give particulars.	
Whether all advance payments on running Accounts have been recovered?	
Whether all the recoveries due to services given to the contractor like rent of accommodation, water charges, electricity charges etc. have been recovered and whether payments made by the company on behalf of the contractor have been adjusted?	
Whether the files containing abstracts from measurement books/ standard measurement books have been completed/ updated?	
Whether hire charges of tools and plant have been recovered and the statement of hire charges with full details attached?	

QUESTIONNAIRE TO BE ANSWERED BY ENGINEER IN CHARGE AND SENIOR ENGINEER	
(Correct particulars and answers to be recorded)	
Whether the certificate of workmanship and completion of work according to specifications, drawings etc. is recorded by Engineer/ Sr. Engineer and whether recoveries have been made for defective works, if any?	
Whether all corrections in the bill/measurement books etc. have been neatly made and attested and there are no overwriting?	
Whether final measurements have been taken as soon as possible after completion of work and the certificate of completion issued? If not, whether reasons for delay have been recorded and communicated to Accounts?	
In respect of Quantities reduced in the final bill as compared to the running payment, whether adequate reasons have been recorded and communicated to Accounts	
Whether the Expenditure has been classified correctly according to heads of Account recorded in the sanctioned estimate?	
Whether the work has been completed within the estimated cost? If not, what is the percentage of excess over the sanctioned estimate/ administrative approval? In case the excess is beyond the competency of Sr. Engineer, what action has been taken for the obtaining the approval of the authority competent to sanction the excess?	
(a) If the contractor has furnished bank guarantee in lieu of cash security deposit towards proper execution of works and guarantee against defects during the maintenance period, whether the period of currency of the bank guarantee covers the entire maintenance period? (b) If not, whether security deposit has been proposed to be recovered from the final bill?	
Whether all the previous audit objections raised on running Account bills have been settled? If so, cite reference.	
Signature of Engineer in Charge	Signature of Engineer in Charge
Date:	Date:



Page 1 of 6

PART- A: PLAN/ REVIEW OF WORK FOR THE MONTH OF Date of Plan/ Review.....

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 2 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART- A: Contd.....

Note 1: In addition to the work planned as per Col. 'A', Contractor shall also make full efforts to minimize the 'Cumulative shortfall attributable to contractor upto the month' as mentioned in Col. 'B' by enhancing its resources, so as to achieve the completion of activities as per agreed schedule. In case contractor is not able to execute the entire shortfall, then BHEL 'Engineer in-charge', shall decide the priority of work to be executed and it shall be binding on the contractor.

Note 2: Percentage Shortfall attributable to contractor w.r.t. "Plan - Shortfall attributable to BHEL" for the month = $[(\Sigma E - \Sigma B) / (\Sigma A - \Sigma D)] \times 100$
In case, $(\Sigma E - \Sigma B)$ is negative, then it shall be treated as zero percent."

Note 3: Form 14 should include all items being planned in the current month, and all items against which shortfall was attributable to contractor till previous month. However, for practical reason, if it is not possible to mention some of the items in Form-14 being planned to be executed in this month, then also value of such items shall necessarily be included in calculation of Total Value.

Note 4: In case reason for shortfall attributable to contractor is w.r.t. T&P and Manpower, it should be in conformity with Part B1 and B2.

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 3 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – B-1: PLAN/REVIEW OF DEPLOYMENT OF MAJOR T&Ps FOR THE MONTH OF

Date of Plan/ Review.....

CONTRACTOR'S SCOPE: -

SN.	PLAN				DEPLOYMENT STATUS			
	Major T&P to be deployed as per work planned for the month	QTY	Deployment Period (in days)	Weightage assigned to planned T&P (in fraction such that $\Sigma C = 1$)	Actual Deployed Quantity	Actual Deployment Period (in days)	Weighted T&P Deployed	REMARKS (Works affected due to non-deployment of T&Ps)
		A	B	C	D	E	$F = (C \times D \times E) / (A \times B)$	

Note: In case, $E > B$, it shall be considered as $E = B$. Similarly, in case $D > A$, it shall be considered as $D = A$.
Percentage of T&P Deployed = $\Sigma F \times 100$

BHEL SCOPE: -

SN.	PLAN				DEPLOYMENT STATUS		
	Major T&P to be deployed as per work planned for the month	QTY	Deployment Period (in days)	Actual Deployed Quantity	Actual Deployment Period (in days)	REMARKS (Works affected due to non-deployment of T&Ps)	

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 4 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – B-2: PLAN/ REVIEW OF DEPLOYMENT OF MANPOWER FOR THE MONTH OF

Date of Plan/ Review.....

CONTRACTOR'S SCOPE: -

SN.	Area of Work	Category of Labour	No. of Labour required as per category	Deployment Period (in days)	No. of Labour actually deployed	Actual Deployment Period (in days)	REMARKS (Works affected due to non-availability of labour)
			A	B	C	D	

Percentage of Manpower Deployed= $100 \times \frac{\sum(C \times D)}{\sum(A \times B)}$

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 5 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – C: PLAN(PHYSICAL) FOR THE NEXT MONTH i.e.

Date of Plan

SN.	Description of work	Original Planned Quantity	Planned Quantity (excluding shortfalls attributable to contractor till date)	Unit of Measurement	T&Ps Required				Manpower Required		REMARKS (Reasons for difference in Original Planned Quantity w.r.t. Planned quantity to be given)
					Contractor Scope		BHEL Scope		Category of Labour	No. of Labour required as per Category	
					Major T&P to be deployed as per work planned for the month	Quantity	Major T&P to be deployed as per work planned for the month	Quantity			

Note 1: Planned quantity should be based on available/ expected fronts/ inputs in the next month

Note 2: “Original Planned Quantity” shall be as per latest jointly agreed programme between BHEL and Contractor before commencement of work or at the time of latest Time Extension, as the case may be.

BHEL
(Sign with name, designation and date)

CONTRACTOR
(Sign with name, designation and date)

 PS-	MONTHLY PLAN & REVIEW WITH CONTRACTOR	Page 6 of 6

Name of Project		Contract No.	
Name of Work		Name of Contractor	

PART – D: REASONS FOR SHORTFALL ATTRIBUTABLE TO BHEL IN RESPECT OF PLAN FOR THE MONTH.....

SN.	Description of Work (from Part-A)	Quantities Affected		Reasons for Shortfall attributable to BHEL	Agency responsible for reasons for Shortfall	Remarks (Supporting Documents in respect of agency responsible)
		(Physical Quantity)	Unit of Measu- rement			
1	2	3	4	5	6	7

Note1: Reasons for shortfall shall include non-availability of fronts/ drawings/ materials/ T&P (BHEL Scope)/ clearances etc. and other hindrances for which contractor is not responsible.

Note2: Agency responsible may be BHEL Site/ MUs/ Design Centre/ BHEL Customer/ other Contractors etc.

BHEL
(Sign with name, designation and date)

BANK GUARANTEE FOR PERFORMANCE SECURITY

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) having its registered office at _____¹ hereinafter referred to as the 'Contractor/Supplier', which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref No.....dated ² valued at Rs.....² (Rupees -----)for <Nature of Work>³ (hereinafter called the 'Contract') and the Contractor having agreed to provide a Contract Performance Guarantee, equivalent to% (.... Percent) of the said value of the Contract to the Employer for the faithful performance of the Contract,

we, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby, irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount Rs ----- (Rupees -----)⁴ without any demur, immediately on a demand from the Employer, .

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment thereunder and the contractors/supplier shall have no claim against us for making such payment.

We the bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We BANK further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER.

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.

2. In Case of Bank Guarantees submitted by Foreign Vendors-

- a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.

- b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
- b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
- b.2** **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
- b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
- b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

**BANK GUARANTEE FOR SECURITY DEPOSIT CUM PERFORMANCE BANK GUARANTEE
BOND**

B.G. NO.

Date

This deed of Guarantee made this ----- day of -----two thousand ---- by <Name and Address of Bank> hereinafter called the "The Guarantor" (which expression shall unless repugnant to the context or meaning thereof be deemed to include its successors and assigns) in favour of M/s Bharat Heavy Electrical Limited (A Govt. of India Undertaking) a company incorporated under the Companies Act, 1956, having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its unit at <Address of Power Sector Region¹> hereinafter called "The Company" (which expression shall unless repugnant to the context or meaning thereof be deemed to include its successors and assigns)

WHEREAS < Contractor's Name and Address> (hereinafter referred to as the Contractor) have entered into a contract arising out of Letter of Intent no. < LOI REF & Date > (hereinafter referred to as "the contract") for < Name of Work > with the company.

AND WHEREAS the contract inter-alia provides that the contractor shall furnish to the company a sum of Rs.----- (Rupees-----) towards security deposit for due and faithful performance of the contract in the form and manner specified therein.

AND WHEREAS the contractor has approached the Guarantor and in consideration of the arrangement arrived at between the contractor and the Guarantor, the Guarantor has agreed to give the Guarantee as hereinafter mentioned in favour of the company.

The Guarantor do hereby guarantee to the company the due and faithful performance, observance or discharge of the Contract by the contractor and further unconditionally and irrevocably undertake to pay to the Company without demur and merely on a demand, to the extent of Rs.----- (Rupees-----) against any claim by the company on them for any loss, damage, costs, charges and expenses caused to or suffered by the company by reasons of the contractor making any default in the performance, observance or discharge of the terms, conditions, stipulations or undertakings or any of them as contained in the contract.

The decision of the company whether any default has occurred or has been committed by the contractor in the performance, observance or discharge of any of the terms, conditions, stipulations or undertakings or any one of them as contained in the contract and / or as to the extent of loss, damage, costs, charges and expenses caused to or suffered by the company by reason of the contractor making any default in the performance, observance or discharge of any of the terms, conditions, stipulations or undertakings or any one of them shall be conclusive and binding on the Guarantor irrespective of the fact whether the contractor admits or denies the default or questions the correctness of any demand made by the company in any Court, Tribunal or Arbitration proceedings or before any other Authority.

The company shall have the fullest liberty without affecting in any way the liability of the Guarantor under this Guarantee, from time to time to vary any of the terms and conditions of the contract or extend time of performance by the contractor or to postpone for any time and from time to time any of the powers exercisable by it against the contractor and either enforce or forebear from enforcing any of the terms and conditions governing the contract or securities available to the company and the Guarantor shall not be released from its liability under these presents by any exercise by the company of the liberty with reference to the matters aforesaid or by reasons of time being given to the contractor or any other forbearance, act or commission on the part of the company or any indulgence by the company to the contractor or any other matter or thing whatsoever which under the law relating to sureties would, but for this provision have the effect of so releasing the Guarantor from its liability under this guarantee.

The Guarantor further agrees that the Guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the contract and its claim satisfied or discharged and till the company certifies that the terms and conditions of the contract have been fully and properly carried out by the contractor and accordingly discharges this Guarantee, subject however, that the company shall have no claim under this Guarantee after ----- i.e. (3 months more than the present date of validity of Bank Guarantee unless the date of validity of this Bank Guarantee is further extended from time to time, as the case may be) unless a notice of the claim under this Guarantee has been served on the Guarantor before the expiry of the said period in which case the same shall be enforceable against the Guarantor notwithstanding the fact that the same is enforced after the expiry of the said period.

**BANK GUARANTEE FOR SECURITY DEPOSIT CUM PERFORMANCE BANK GUARANTEE
BOND**

The Guarantor undertakes not to revoke this Guarantee during the period it is in force except with the previous consent of the Company in writing and agrees that any liquidation or winding up or insolvency or dissolution or any change in the constitution of the contractor or the Guarantor shall not discharge the Guarantor's liability hereunder.

It shall not be necessary for the company to proceed against the contractor before proceeding against the Guarantor and the Guarantee herein contained shall be enforceable against them notwithstanding any security which the Company may have obtained or obtain from the Contractor shall at the time when proceedings are taken against the Guarantor hereunder be outstanding or unrealized.

Notwithstanding anything contained herein before, our liability under the Guarantee is restricted to Rs.-----
- (Rupees-----). Our guarantee shall remain in force until -----, i.e. (the present date of validity of Bank Guarantee unless the date of validity of this Bank Guarantee is further extended from time to time) unless a claim or demand under this guarantee is made against us on or before ----- (3 Months more than the validity date) we shall be discharged from our liabilities under this Guarantee thereafter.

Any claim or dispute arising under the terms of this documents shall only be enforced or settled in the courts of at < **Name of place²** > only.

The Guarantor hereby declares that it has power to execute this guarantee and the executant has full powers to do so on behalf of the Guarantor.

IN WITNESS whereof the ----- (Bank) has hereunto set and subscribed its hand the day, month and year first, above written.

(Name of the Bank)

Signed for and on behalf of the Bank
(Designation of the Authorized Person Signing the Guarantee)

(Signatory No.-----)

DATED:

SEAL

Notes :

1. **Address of Power Sector Regions (inviting the Tender)** is as below:
 - PSNR : Bharat Heavy Electricals Limited, Power Sector Northern Region, HRDI & PSNR Complex, Plot No 25, Sector 16-A, Noida – 201 301 (Uttar Pradesh)
 - PSER : Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700 091
 - PSWR: Bharat Heavy Electricals Limited, Power Sector Western Region, Shree Mohini Complex, 345 Kingsway, Nagpur 440 001
 - PSSR: Bharat Heavy Electricals Limited, Power Sector Southern Region, 690, Anna Salai, Nandanam, Chennai 600 035
2. **Name of place (for jurisdiction of Courts)** is as below:
 - PSNR : Delhi
 - PSER : Kolkata
 - PSWR: Nagpur
 - PSSR : Chennai
3. The BG shall be executed on non-judicial stamp papers of adequate value procured in the name of the Bank in the State where the Bank is located.
4. The BG is required to be sent by the executing Bank directly to BHEL at the address where tender is submitted / accepted under sealed cover.

BANK GUARANTEE FOR RELEASE OF AMOUNTS WITHHELD/LIQUIDATED DAMAGES AMOUNT

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited ¹(hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier) incorporated under the having its registered office at _____ ¹(hereinafter referred to as the 'Contractor', which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref No.....dated ²valued at Rs.....(Rupees -----) for <Nature of Work>³(hereinafter called the 'Contract')

The Contractor as per Contract should have completed the work/ supplies under the contract by.....(date). As per terms and conditions of the Contract, the Employer is entitled to levy Liquidated Damages (LD) for delays and the Employer has withheld an amount of Rs by way of LD as per the Contract. Now, on the request of the Contractor, the Employer having agreed to release the amount of Rs.....withheld from the Contractor's invoices as Liquidated damages under the terms and conditions of the Contract on production of a Bank Guarantee for Rs. _____ (Rupees.....only) ⁴

We, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount of Rs ----- (Rupees -----) without any demur, merely on a demand from the Employer

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment thereunder and the contractors/supplier shall have no claim against us for making such payment.

We the bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We BANK further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's/ Supplier's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, ... Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER.

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ *DATE OF EXPIRY OF CLAIM PERIOD*

⁷ *BG AMOUNT IN FIGURES AND WORDS.*

⁸ *VALIDITY DATE*

⁹ *DATE OF EXPIRY OF CLAIM PERIOD*

Note:

- 1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.**
- 2. In Case of Bank Guarantees submitted by Foreign Vendors-**
 - a. From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2** In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

BANK GUARANTEE FOR SUPPLY FREE ISSUE MATERIAL.

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, Asiad, New Delhi – 110049 through its Unit at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091 having awarded to (Name of the Vendor / Contractor / Supplier).having its registered office at _____¹ (hereinafter referred to as the 'Contractor/Supplier/Fabricator' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref. No.....dated ² valued at Rs.....(Rupees -----) for <Nature of Work>³ (hereinafter called the 'Contract')

and, the Employer having agreed as per the terms and conditions of the Contract to supply free issue material costing Rs._____ for the manufacture/fabrication of the equipment at the Contractor's site on on furnishing a Bank Guarantee for Rs._____ (Rupees.....)⁴ in the manner hereinafter specified for the due safeguard of the free issue material,

we, ..., (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount of Rs ----- (Rupees -----) without any demur, merely on a demand from the Employer, .

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Contractors/Supplier shall have no claim against us for making such payment.

We the Bank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor/Supplier/ Fabricator and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's/Supplier's/ Fabricator's liabilities.

This Guarantee shall remain in force upto and including.....⁵ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/ Supplier/ Fabricator but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the ⁶ (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all liabilities under this guarantee thereafter.

We, ... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁷
- b) This Guarantee shall be valid up to ⁸
- c) Unless the Bank is served a written claim or demand on or before ⁹ (3 months more than the present date of validity of Bank Guarantee) all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Any claim or dispute arising under the terms of this document shall only be enforced or settled in the courts of at Kolkata only.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER .

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ PROJECT/SUPPLY DETAILS

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE

⁶ DATE OF EXPIRY OF CLAIM PERIOD

⁷ BG AMOUNT IN FIGURES AND WORDS.

⁸ VALIDITY DATE

⁹ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date.
2. In Case of Bank Guarantees submitted by Foreign Vendors-
 - a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
 - b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2 **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3 The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4 The BG should clearly specify that the demand or other document can be presented in electronic form.

PROFORMA OF BANK GUARANTEE FOR EARNEST MONEY
(On non-Judicial paper of appropriate value)

Bank Guarantee No.....

Date.....

To

(Employer's Name and Address)

.....

Dear Sirs,

In accordance with the terms and conditions of your Invitation for Bids/Notice Inviting Tender No.....¹(Tender Conditions) M/s. having its registered office at ² (hereinafter referred to as the '**Tenderer**'), is submitting its bid for the work of..... for.....³. at Bharat Heavy Electricals Limited, Power Sector Eastern Region, BHEL Bhawan, Plot No 9/1, DJ Block, Sector-II, Salt lake City, Kolkata – 700091.⁴(name of the Employer)

The Tender Conditions provide that the **Tenderer** shall pay a sum of Rs as Earnest Money Deposit in the form therein mentioned. The form of payment of Earnest Money Deposit includes Bank Guarantee executed by a Scheduled Bank.

In lieu of the stipulations contained in the aforesaid Tender Conditions that an irrevocable and unconditional Bank Guarantee against Earnest Money Deposit for an amount of ⁵ is required to be submitted by the Tenderer as a condition precedent for participation in the said Tender and the Tenderer having approached us for giving the said Guarantee,,

we, the[Name & address of the Bank] having our Head Office at(hereinafter referred to as the Bank) being the Guarantor under this Guarantee, hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer without any demur, merely on your first demand any sum or sums of Rs. ⁵(*).....without any reservation, protest, and recourse and without the beneficiary needing to prove or demonstrate reasons for its such demand. Any such demand made by the 'Employer' shall be

conclusive and binding on us irrespective of any dispute or difference raised by the Tenderer.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment hereunder and the Tenderer shall have no claim against us for making such payment.

We Bank further agree that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Tender or to extend the time of submission of bids from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Tenderer and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Tendered or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Tenderer or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Tenderer and notwithstanding any security or other guarantee that the Employer may have in relation to the Tenderer's liabilities.

This Guarantee shall be irrevocable and shall remain in force upto and including.....⁶ and shall be extended from time to time for such period as may be desired by the Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Tenderer but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms hereof. However, unless a demand or claim under this Guarantee is made on us in writing on or before the ⁷ we shall be discharged from all liabilities under this Guarantee.

We, ... Bank lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....5.....
- b) This Guarantee shall be valid up to 6
- c) Unless the Bank is served a written claim or demand on or before _____⁷ all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

For and on behalf of

(Name of the Bank)

Date.....

Place of Issue.....

¹ *Details of the Invitation to Bid/Notice Inviting Tender*

² *Name and Address of the Tenderer*

³ *Details of the Work*

⁴ *Name and Address of BHEL Unit/Division/Region (Already filled up)*

⁵ *BG Amount in words and Figures*

⁶ *Validity Date*

⁷ *Date of Expiry of Claim Period*

Note:

1. Units are advised that expiry of claim period may be kept 2/3 months after validity date. As per Works Policy, the Bank Guarantee shall be valid for at least six months.

2. In Case of Bank Guarantees submitted by Foreign Vendors-

- a. From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
- b. From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**

 - b.1** In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter-Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2** **In case, Foreign Vendors intend to provide BG from** Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3** The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4** The BG should clearly specify that the demand or other document can be presented in electronic form.

Form for getting payment through RTGS (Real Time Gross Settlement)

01. Name of Vendor **BHARAT HEAVY ELECTRICALS LTD.**
02. Address **~~BHEL~~ BHEL HOUSE, SIRI FORT, N. DELHI**
03. Vendors Bank A/c Name **BHARAT HEAVY ELECTRICALS LTD.**
04. Vendors Bank A/c No. **11107800029**
05. Name of Bank **STATE BANK OF INDIA**
06. Name of Branch **COMMERCIAL BR., SALT LAKE, SECTOR-V**
07. Branch Phone No. **KOLKATA**
08. City **033-23575666**
09. IFSC Code of the Branch **KOLKATA**
SBIN 0004289

The charges if any for payment through RTGS may be recovered from the Bill submitted by us.

Signature of Authorized Representative of Vendor
के. के. कोआरी / K. K. Coari
उप महाप्रबंधक (वित्त) / Dy. General Manager (Fin)
बी. एच. ई. एल. : पी.एस.ई.आर. : कोलकाता - 700 091
BHEL: PSER / Kolkata-700 091

Confirmation by Banker
with office seal

Note : Incorrect information will create Accounting complications and payment will be delayed

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 1 OF 25

CONTENTS

CLAUSE NO	DESCRIPTION
1.0	PROJECT SYNOPSIS AND GENERAL INFORMATION
2.0	SITE VISIT
3.0	NAME OF WORK
4.0	SCOPE OF WORK
5.0	DEVIATIONS
6.0	DEWATERING
7.0	GENERAL TECHNICAL REQUIREMENTS (CODES AND STANDARDS)
8.0	GENARL SERVICES TO BE RENDERED BY THE BIDDER
9.0	PROTECTION
10.0	GENERAL GUIDELINES FOR FIELD ACTIVITIES
11.0	QUALITY CONTROL & QUALITY ASSURANCE
12.0	HEALTH, SAFETY & ENVIRONMENT
13.0	LAND
14.0	WATER
15.0	ELECTRICITY
16.0	CONSUMABLE
17.0	TEST CERTIFICATES
18.0	PROJECT MANAGEMENT/ CONSTRUCTION MANAGEMENT
19.0	TOOLS & PLANTS (TO BE PROVIDED BY CONTRACTOR)
20.0	INSURANCE
21.0	MATERIAL HANDLING (BHEL ISSUED MATERIAL)
22.0	ISSUE OF MATERIALS
23.0	RETURN OF MATERIALS
24.0	CEMENT AND STEEL CONSUMPTION AND WASTAGE
25.0	RECONCILIATION OF BHEL ISSUED MATERIALS
26.0	RECOVERY OF MATERIAL
27.0	CONSTRUCTION OF TEMPORARY OFFICE, STORES ETC
28.0	CIVIL LABORATORY AT SITE
29.0	CONSTRUCTION SCHEDULE
30.0	COMPLETION PERIOD
31.0	LIQUIDATED DAMAGE/ PENALTY
32.0	CERTIFICATE TOWARDS COMPLETION
33.0	GUARANTEE
34.0	INTEREST BEARING RECOVERABLE ADVANCE/ MOBILISATION ADVANCE
35.0	OVER RUN CHARGES
36.0	REVISION ON ACCEPTED CONTRACT RATE
37.0	PRICE VARIATION CLAUSE
38.0	EXTRA/ ADDITIONAL ITEMS OF WORK
39.0	SECURITY DEPOSIT, PERFORMANCE BOND & FINAL BILL
40.0	TAXES, DUTIES ETC
41.0	INTERIM PAYMENTS
42.0	CONTRACT PRICE
43.0	METHOD OF MEASUREMENT
44 .0	OTHER TERMS
45.0	ANNEXURE-A

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 2 OF 25

This volume shall be construed as part of tender document and shall be read along-with others volumes of tender. Unless otherwise specified, in case of any conflict or inconsistency between the general and technical conditions, the same shall be brought out by the bidder in writing to BHEL for clarification during pre-bid discussions, if applicable; failing which most stringent interpretation/ clause in favour of BHEL shall be adopted and the same shall be binding to the bidder. Unless otherwise specified, all terms & conditions shall be applicable for entire scope and for each package of the tender.

CLAUSE NO	DESCRIPTION
1.0	PROJECT SYNOPSIS AND GENERAL INFORMATION
1.1	PROJECT SYNOPSIS AND GENERAL INFORMATION NTPC (for NABINAGAR POWER GENERATING COMPANY LTD.) is setting up integrated FGD System for three(3) units of 3x660 MW Super Thermal Power Project (coal based) at Nabinagar, District- Aurangabad, State of Bihar. The plant is located in Aurangabad district of Bihar at a distance of about 15 Kms. From Barun in Aurangabad district of Bihar and is approachable from NH-2 through a 20 Kms (approx.) long single lane metaled road. The Aurangabad city is about 55 Kms. From Project site. Nearest Railway station is Ankhora on Sone – Garwa Road Section of Eastern Central Railway at about 1.0 Kms. From the project site. Nearest Airport: The nearest airport at Gaya is at a distance of about 120 Kms from project site. The distances of site from Patna Airport and Varanasi Airport are about 250 Kms & 220 Kms respectively.
2.0	SITE VISIT
	The contractor should visit project site and acquire full knowledge and information about conditions prevailing at site and in & around the plant premises, together with all the statutory, obligatory, mandatory requirements of various authorities before submission of the bid.
3.0	NAME OF WORK
	Levelling Grading, Piling Work Including Testing of Piles and Other Associated Works etc. of FGD System for 3x660 MW NPGCL Nabinagar TPP, Bihar.
4.0	SCOPE OF WORK
4.1	The scope broadly covers providing labour, supervision, materials (except those which will be supplied by BHEL free of cost), T&Ps, consumables etc as per the applicable portion of the technical specification and terms & conditions of tender taking into account all clarifications, confirmations and agreements till date for the following major jobs: Installation and Testing of BORED CAST IN-SITU Pile for • Absorber Tower • FGD Control Room • Ball Mill Building & Lime Stone Building • Gypsum Dewatering Building • RC Pump & Oxidation Blower Foundation • Misc. Tank Foundation • Misc. Pump & Equipment Foundations • Duct Foundation • Pipe Rack • Limestone Storage Silo • Wet Ball Mill Foundation • Booster Fan Foundation • SO₂ Analyser Room • CW Treatment Building

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 3 OF 25

	ECW Pump House
4.2	Ready mix concrete shall be given by BHEL Free of Cost at Batching Plant inside the plant premises. Bidder has to transport the concrete from batching plant to the location of work. Bidder to submit a receipt of concrete at batching plant based on the print out of batching. Reconciliation of quantity of concrete shall be done based on concrete received from batching plant vis-a-vis actual use of concrete at site.
4.3	The scope shall include other related works although they may not be specifically mentioned in the subsequent clauses and all such incidental items not mentioned, but are necessary for completion of the work as a whole. The scope also includes testing of all materials at site laboratory or approved laboratory outside, submitting test reports, arranging supervision etc. and execution of the contract with major areas of work mentioned above.
4.4	Any buried pipe / cable coming in the working fronts are to be removed safely by the contractor at no extra cost to BHEL.
4.5	The work to be performed under this specification consists of providing all labour, materials, consumables, equipment, temporary works, temporary storage sheds for contractors own use, temporary colony for labour and staff, temporary site offices, constructional plant's transportation / handling and all incidental items not shown or specified but reasonably implied or necessary for the completion of subject scope, all in strict accordance with the specifications including revisions and amendments thereto as may be required during the execution of work.
4.6	The scope shall also include setting up by the bidder a testing room with compression testing machine and other site test instruments for conducting day to day testing of concrete cubes & piing work. Qualified quality engineer to be deployed as necessary.
4.7	All quality standards, tolerances, welding standards & other technical requirements shall be strictly adhered to. The bidder shall fully apprise himself of the prevailing conditions at the proposed site, climatic conditions including monsoon pattern, soil conditions, local conditions and site specific parameters and shall include for all such conditions and contingent measures in the bid, including those which may not have been specifically brought out in the specifications.
5.0	DEVIATIONS The bidder is required to submit with his offer in the relevant schedule / format without any ambiguity. Any assumptions, presumptions, deviations etc. indicated or implied anywhere by the bidder except those indicated in the deviation schedule / format will not be recognized and will not form a part of consideration / offer. In the absence of such filled-up schedule / format it will be understood and agreed that the bidder's offer is based on strict conformance to the specification and no negotiation would be allowed in this regard. BHEL reserve the right not to recognize any / all deviations submitted after opening of the bid.
6.0	DEWATERING Contractor shall ensure at all times that his work area & approach / access roads are free from accumulation of water, so that the materials are safe and the erection / progress schedule are not affected. No separate claim in this regard shall be admitted by BHEL. No separate payments for dewatering of subsoil, surface water or catchments water, if required, at any time during execution of the work including monsoon period shall be considered by BHEL.
7.0	GENERAL TECHNICAL REQUIREMENTS (CODES AND STANDARDS)
7.1	Except where otherwise specified, the plant / equipment shall comply with appropriate Indian Standard or an agreed internationally accepted Standard Specification as mentioned elsewhere in tender, each incorporating the latest revisions at the time of tendering. Where no internationally accepted standard is applicable, the bidder shall give all particulars and details as necessary; to enable BHEL to identify all of the plant/ equipment in the same detail as would be possible had there been a standard specification.
7.2	Where the bidder proposes alternative codes or standards he shall include in his tender one copy (in English) of each standard specification to which materials offered shall comply. In

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 4 OF 25

	such case, the adopted alternative standard shall be equivalent or superior to the standards mentioned in the specification.
7.3	In the event of any conflict between the codes & standards referred above and requirements of this specification, the requirements which are more stringent shall govern.
7.4	Tools used during erection and commissioning shall not be accepted except with the specific approval of the engineer.
7.5	Wherever specified or required the plant / equipment shall conform to various statutory regulations such as Indian Boiler Regulation, Indian Electricity Rules, Indian Explosive Act, Factories Act etc. Wherever required, obtaining approval for plant / equipment supplied under the specification from statutory authorities shall be the responsibility of the contractor.
8.0	GENERAL SERVICES TO BE RENDERED BY THE BIDDER
8.1	Deployment of all tools & tackle, construction machinery, transportation vehicles and all other implements in adequate number and size, appropriate for the construction work to be handled under scope of this specification except otherwise specified.
8.2	Providing support services for the contractor's erection staff e.g. construction of site offices, temporary stores, residential accommodation and transport to work site for erection personnel, watch and ward for security and safety of the materials under the Contractor's custody etc. as required.
8.3	Maintaining proper documentation of all site activities undertaken by the contractor as per the proforma mutually agreed with BHEL, submitting monthly progress reports as also any such document as and when desired by BHEL / owner, taking approval of all statutory authorities e.g., Factory Inspector, Provident Fund authority etc. for respective portions of work under the jurisdiction of such statutes of laws.
8.4	As part of overall project management activity, the contractor shall be responsible for proper co-ordination of construction activities during various phases of execution of the contract. The contractor shall identify a person designated as construction manager, with whom BHEL shall interact on matters related to execution of the contract. The construction manager shall be the single point contact person on behalf of the contractor. BHEL shall interact with the construction manager only on all matters on co-ordination between BHEL and the contractor. For timely completion of work, the contractor may have to work in one or more shifts. He will not be eligible for any extra charge on this account.
8.5	The contractor shall confine all his field operations to those works which can be reformed without subjecting the equipment and materials to adverse effects, during inclement weather conditions, like monsoon, storms etc and during other unfavourable construction conditions. No field activities shall be performed by the contractor under conditions which might adversely affect the quality and efficiency thereof, unless special precautions or measures are taken by the contractor in proper and satisfactory manner in the performance of such works and with the concurrence of the engineer. Such unfavourable construction conditions in no way relieve the contractor of his responsibility to perform the works as per the schedule.
8.6	The contractor shall deploy skilled, semi-skilled and unskilled workmen required for all works including handling and transportation of material from site store to erection site, erection, testing etc contemplated under this specification. Only fully trained and competent men with previous experience on the job shall be employed. They shall hold valid certificates wherever necessary. BHEL reserve the right to decide on the suitability of the workers and the other personnel who will be employed by the contractor. BHEL reserves the right to insist on removal of any employee of the contractor at any time, if they find him unsuitable and the contractor shall forthwith remove him.
8.7	The supervisory staff employed by the contractor shall be technically qualified and experienced in the area of work. They shall ensure proper out turn of work and discipline on the part of labour put on the job by the contractor and in general see that the works are carried out in a safe and proper manner and in coordination with other labour and staff employed directly by BHEL or other contractors of BHEL and BHEL's client.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 5 OF 25

8.8	The contractor shall also furnish daily manpower report showing by classification the number of employees engaged in various categories of work a progress report of work as required by BHEL engineer.
8.9	The work shall be executed under the usual conditions affecting major power plant construction and in conjunction with numerous other operations at site. The contractor and his personnel shall co-operate with other personnel, and other contractors, co-ordinating his work with others and proceed in a manner that shall not delay or hinder the progress of work as a whole.
8.10	The contractor's supervisory staff shall execute the work in the most substantial and workman like manner in the stipulated time. Accuracy of work and aesthetic finish are essential part of this contract. The contractor shall be responsible to ensure that assembly and workmanship conform to the dimensions and tolerance given in the drawing / instruction given by BHEL Engineer from time to time.
8.11	It is the responsibility of the contractor to engage his workman in shifts or on overtime basis for achieving the target set by BHEL during erection, commissioning and testing period. Contractor's quoted rate shall include all these contingencies.
8.12	Any other service, although not specifically called for but required for a contract of the size and nature indicated in the specification.
9.0	PROTECTION
9.1	Equipment having anti-friction or sleeve bearings, pertaining to scope of this contract, shall be protected by weather tight enclosures. Coated surfaces shall be protected against impact, abrasion, discoloration and other damages. Surfaces which are damaged shall be repainted.
9.2	Electrical equipments, controls and instrumentations shall be protected against moisture and water damages. All external gasket surfaces and flange faces, couplings, rotating equipment shafts, bearings and like items shall be thoroughly cleaned and coated with rust preventive compound and protected with suitable wood, metal or other substantial type covering to ensure their full protection. All exposed threaded parts shall be greased and protected with metallic or other substantial type protectors
9.4	All other consumables to be supplied by the contractor within the quoted rate.
10.0	GENERAL GUIDELINES FOR FIELD ACTIVITIES
10.1	The contractor shall execute the works in a professional manner so as to achieve the target schedule without any sacrifice on quality and maintaining highest standards of safety and cleanliness.
10.2	The contractor shall co-operate with owner / BHEL and other contractors working in site and arrange to perform his work in a manner so as to minimise interference with other contractor's works. BHEL's engineer shall be notified promptly of any defect in other contractors' works that could affect the contractor's work. If rescheduling of contractor's work is requested by the owner's / BHEL's engineer in the interest of overall site activities, the same shall be complied with by the contractor. In all cases of controversy, the decision of BHEL shall be final and binding on the contractor without any commercial implication.
10.3	The engineer shall hold weekly meeting of all the contractors working at site at a time and a place to be designated by the engineer. The contractor shall attend such meetings and take notes of discussions during the meeting and the decisions of the engineer and shall strictly adhere to those decisions in performing this work. In addition to the above weekly meeting, engineer may call for other meetings either with individual contractors or with selected number of contractors and in such a case the contractor, if called will also attend such meetings.
10.4	Time is the essence of the contract and the contractor shall be responsible for performance of his work in accordance with the specified construction schedule. If at any time the contractor is falling behind the schedule, he shall take necessary action to make good of such delays by increasing his work to comply with the schedule and shall communicate such action in writing to the engineer, satisfying that his action will compensate for the delay. The contractor shall not be allowed any extra compensation for such action.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 6 OF 25

10.5	The engineer shall however not be responsible for provision of additional labour and or materials or supply of any other services to the contractor except for the co-ordination work between various contractors as set out earlier.
10.6	The works under execution shall be open to inspection & supervision by BHEL's / Owner's engineer at all times. The contractor shall give reasonable notice to BHEL before covering up or otherwise placing beyond the reach of inspection any work, in order that same may be verified, if so desired by owner/ BHEL.
10.7	Every effort shall be made to maintain the highest quality of workmanship by stringent supervision and inspection at every stage of execution. Manufacturer's instruction manual and guidelines on sequence of erection and precautions shall be strictly followed. Should any error or ambiguity be discovered in such documents the same shall be brought to the notice of BHEL's engineer. Manufacturer's interpretation in such cases shall be binding on the contractor.
10.8	The contractor shall comply with all the rules and regulations of the local authorities, all statutory laws including Minimum Wages, Workmen Compensation etc. All registration and statutory inspection fees, if any, in respect of the work executed by the contractor shall be to his account.
10.9	Equipment and material, in case wrongly installed, shall be removed and reinstalled to comply with the design requirement at the contractor expense, to the satisfaction of BHEL / owner.
11.0	QUALITY CONTROL & QUALITY ASSURANCE
11.1	INSPECTION & FIELD QUALITY ASSURANCE
11.1.1	Contractor shall carry out all activities conforming to the approved Field Quality Plan (FQP) & technical instructions as revised from time to time. 'Total Quality' shall be the watchword of the work and contractor shall strive to achieve the quality standards, procedures laid down by BHEL. He shall follow all the instructions as per BHEL drawings and quality standards. Contractor shall provide the services of quality assurance engineer as per the relevant clauses.
11.1.2	Preparation of quality assurance log sheets and protocols with customer / consultants / statutory authority, welding logs, NDE records, testing & calibration records and other quality control and quality assurance documentation as per BHEL engineer's instructions, is within the scope of work / specification. These records shall be submitted to BHEL / customer for approval from time to time.
11.1.3	The protocols between contractor and customer / BHEL shall be made for correctness of foundations, materials, procedures, at each stage of installation, generally as per the requirement of customer / BHEL. This is necessary to ensure elimination of errors and to avoid accumulation and multiplication of errors.
11.1.4	A daily log book (with proper indexing) should be maintained by every supervisor / engineer of contractor, for respective area of work, on the job for detailing and incorporating alignment/ clearance / centering / levelling readings and inspection details of various equipment, etc. This log book shall be always accessible to BHEL engineers.
11.1.5	The performance of welders (as applicable under the scope of this contract) will be reviewed from time to time as per the BHEL standards. Welders' performance record shall be furnished periodically for scrutiny of BHEL's Engineer. Corrective action as informed by BHEL shall be taken in respect of those welders not conforming to these standards. This may include removal/ discontinuance of concerned welder(s). Contractor shall arrange for the alternate welders immediately.
11.1.6	Only welders duly authorized by BHEL / customer / consultant after welder qualification test as per ASME Sec-Ix / AWS D1.1 (as applicable) shall be engaged on the work. All the welders shall carry identity cards as per the proforma prescribed by BHEL / Customer / Consultant.
11.1.7	Any re-laying or re-termination of cables / re-erection of instruments / recalibration of instruments etc. required due to contractor's mistake and found at any stage inspection shall

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 7 OF 25

	be carried out by the contractor at no extra cost. Repair / rectification procedure to be adopted to make any job acceptable shall be subject to the approval of BHEL.
11.1.8	Weekly Quality Review Meeting at site shall be organised by BHEL to discuss quality issues and next weeks inspection plans. Site in-charge of the contractor along with QAEs of the contractor must be present in the meeting with closure report of the issues raised by BHEL in the previous meetings.
11.2	REQUIREMENT OF ISO 9001
11.2.1	BHEL: PSER is accredited with ISO 9001 certification and as such this work is subject to various audits to meet ISO 9001 requirements.
11.2.2	The basic philosophy of the Quality Management System under ISO 9001 is to define the organizational responsibility, work as per documented procedures, verify the output with respect to acceptance norms, identify the non-conforming product / procedure and take corrective action for removal of non-conformance specifying the steps for avoiding recurrence of such non-conformities, & maintain the relevant quality records. The non-conformities are to be identified through the conduct of periodical audit of implementation of quality systems at various locations/stages of work. Suppliers / vendors of various products / services contributing in the work are also considered as part of the quality management system. As such the contractor is expected not only to conform to the quality management system of BHEL but also it is desirable that they themselves are accredited under any quality management system standard.
11.2.3	BHEL reserves the right to carry out quarterly quality audits and quality surveillance of the systems and procedures of contractor's quality management. Contractor shall provide all necessary assistance to enable BHEL to carry out such audit & surveillance.
11.2.4	Quality audits / approval of the results of test & inspection will not prejudice the right of BHEL to reject an equipment service not giving desired performance and shall not in no way limit the liabilities and responsibilities of the contractor in earning satisfactory performances of equipment / service as per specification.
11.3	MMEs / MMRs
11.3.1	Contractor shall ensure deployment of reliable and calibrated MMEs (Measuring and Monitoring Equipment). The MMEs shall have test / calibration certificates from authorised / Government approved / Accredited agencies traceable to National / International Standards. Re-testing / re-calibration shall also be arranged at regular intervals during the period of use as advised by BHEL Engineer within the contract price. The contractor will also have alternate arrangements for such MMEs so that work does not suffer when the particular equipment / instrument is sent for calibration. Also if any MMEs not found fit for use, BHEL shall have the right to stop the use of such item and instruct the contractor to deploy proper item and recall i.e. repeat the readings taken by that instrument, failing which BHEL may deploy MME and retake the readings at Contractor's cost.
11.3.2	Contractor shall provide all the Measuring Monitoring Equipment (MMEs) required for completion of the work satisfactorily. These MMEs shall be of brand, quality and accuracy specified by BHEL Engineer and should have necessary calibration and other certificates as per the requirement of BHEL Engineer. Decision of BHEL Engineer regarding acceptance or otherwise of the measuring instruments / gauges / tools for the work under this specification, is final and binding on the contractor. BHEL shall give an indicative list of MMEs required for this work else where in this contract and to be made available by the contractor. The list will be reviewed by BHEL site as per the requirement of approved FQPs and the contractor shall meet any augmentation needed wherever required.
11.3.3	It is the responsibility of the contractor to prove the accuracy of the testing / measuring / calibrating equipment brought by him based on the periodicity of calibration as called for in the BHEL's quality assurance standards/BHEL Engineer's instructions.
11.3.4	Re-work necessitated on account of use of invalid MMEs shall be entirely to the contractor's account. He shall be responsible to take all corrective actions, including resource augmentation if any, as specified by BHEL to make-up for the loss of time.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 8 OF 25

11.3.5	In the courses of erection, it may become necessary to carry repeated checks of the work with instruments recently calibrated, re-calibrated. BHEL may counter / finally check the measurements with their own MMEs. Contractor shall render all assistance in conduct of such counter / final measurements.			
11.4	INSPECTION BY TS / FES / QA ENGINEERS OF BHEL UNITS / ENGINEERING CENTRES			
11.4.1	Apart from day-to-day inspection by BHEL Engineers stationed at Site and Customer's Engineers, stage inspection of equipment under erection and commissioning at various stages may also be conducted by teams of Engineers from Field Engineering Services of BHEL's Manufacturing Units, Quality Assurance teams from Field Quality Assurance, Unit/Factory Quality Assurance and Commissioning Engineers from Technical Services etc. Contractor shall arrange all labour, tools and tackles etc along with proper access for such stage inspections free of cost.			
11.4.2	Any modifications suggested by BHEL FES and QA Engineers' team shall be carried out. Claims of contractor, if any, shall be dealt as per applicable clause of the contract, and provided such modifications have not arisen for reasons attributable to the contractor.			
11.5	PENALTIES ON VENDORS / SUB-CONTRACTORS AGAINST NON-COMPLIANCE OF QUALITY NORMS			
Sl. No.	Nature of Non-compliance	Penalty for Domestic Project	Penalty for Export Project	Remarks
GENERAL				
11.5.1	Unavailability of QAE deployment schedule (duly approved by BHEL Site) matching with manpower requirement of approved L2 schedule	0.10%	0.10%	Against each RA bill
11.5.2	Unavailability of required number of QAE with proper experience & NDT certification as per the requirement of the Contract	Rs. 1,000.00	\$16.00	Per person per day
11.5.3	Not attending quality meeting of BHEL by nominated member of vendor / sub-contractor	Rs. 2,000.00	\$32.00	Per meeting
CALIBRATION				
11.5.4	Use of MMEs without valid calibration certificate	Rs. 1,000.00	\$16.00	Per equipment per instance
11.5.5	Use of NDT equipment, welding equipment without having valid calibration certificate / condition not as per requirement	Rs. 1,000.00	\$16.00	Per equipment per instance
WELDING & NDT				
11.5.6	Unqualified welders carrying out welding / tack welding	Rs. 1,000.00	\$16.00	Per welder per instance. (Gatepass of the person shall be withheld)
11.5.7	Not using portable oven for welding consumables	Rs. 500.00	\$8.00	Per welder per instance. (The consumables in the oven shall be confiscated)

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 9 OF 25

11.5.8	Not using electrodes pre-baked in baking oven	Rs. 500.00	\$8.00	Per instance. (The subject consumables shall be confiscated)
11.5.9	Not using welding consumables of approved make & not using correct type of electrode as per approved EWS / Drawing / WPS	Rs. 1,000.00	\$16.00	Per instance. (The subject consumables shall be confiscated)
11.5.10	Non-removal of welding slag and spatters after welding	Rs. 500.00	\$8.00	Per joint
11.5.11	Not using NDT equipment as prescribed in the manual / FQP / guidelines / Contract	Rs. 1,000.00	\$16.00	Per equipment per instance
11.5.12	Welder doing welding without valid job card	Rs. 500.00	\$8.00	Per instance
11.5.13	Discrepancy observed in the weld joints identified by BHEL / Customer for RT vs RT film offered	Rs. 2,000.00	\$32.00	per joint
MATERIAL MANAGEMENT				
11.5.14	Non-maintenance of grid pillar marking	Rs. 200.00	\$3.00	Per location week
11.5.15	Mismatch of location of material in store area w.r.t. location mentioned in stock register	Rs. 500.00	\$8.00	Per instance
11.5.16	Non-compliance of Preservation of material as per storage & preservation manuals	Rs. 1,000.00	\$16.00	Per equipment
11.5.17	Not offering received material for verification within stipulated time as per contract	Rs. 500.00	\$8.00	Per instance
PAINTING & ALLIED WORKS				
11.5.18	Not using primer / paints of approved make and as per Specifications	Rs. 1,000.00	\$16.00	Per instance
11.5.19	Painting without proper surface preparation as per approved schedule / drawing / FQP	Rs. 500.00	\$8.00	Per instance
PROTOCOLS & LOG SHEETS				
11.5.20	Delay in preparation of Protocols / Logsheets as per approved FQP within 3 days of completion of checks	Rs. 200.00	\$3.00	Per protocol per day delay
INSPECTION OF BOUGHT-OUT ITEMS / CONSUMABLES				
11.5.21	Delay in offering inspection of Bought-out Items / Consumables / Aggregates (for items which need site inspection as per approved QP) within 3 days of receipt of material at site	1% of the item value of the LOT	1% of the item value of the LOT	per item per day delay after receipt of material

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 10 OF 25

11.5.22	Delay in submission of required documents (viz. Invoice, Inspection Release Note, COC, MDCC, MTC as the case may be) of Bought-out Items (shop inspection items / consumables) with in 3 days of receipt of material at site.	1% of the item value of the LOT	1% of the item value of the LOT	per item per day delay after receipt of material
NOTE: Any non-conformity requiring dismantling / rework, attributable to vendor / sub-contractor, shall be penalised at a rate mentioned above or cost to BHEL, which ever is higher.				
12.0	HEALTH, SAFETY & ENVIRONMENT			
12.1	Vendor has to follow HSE norms at project site during execution of entire contract period and the applicable HSE norms are noted in Tender Document for HSE norms having Document Title: Health, Safety and Environment Plan for Site Operation by Subcontractors.			
13.0	LAND			
13.1	Availability of land within plant boundary is very limited and the contractor has to plan & use the existing land considering the use of land by other contractors and the storage of plant machineries and materials. The existing land shall be shared by all erections agencies. The same will be reviewed by BHEL and allotted to the extent available/ considered necessary free of cost. Contractor shall develop these areas for their site office, their own stores etc. Bidder must visit site to assess site condition, prior to quoting.			
13.2	Levelled area for storage area for BHEL's material shall be provided as per availability free of cost.			
13.3	Land for labour colony shall be arranged by successful bidder at their own. The contractor shall construct labour colony / hutment as per his requirements after obtaining approval of formalities from statutory body. Further, contractor must ensure minimum HSE norms and hygienic sanitary conditions in his labour colony.			
13.4	The contractor will be responsible for handing back all lands, as handed over to him by BHEL/NTPC.			
14.0	WATER			
14.1	BHEL will provide construction as well as drinking water at one point within 500 m from given work premises, free of cost to the contractor. However, 01 additional water source may be arranged by Bidder as per requirement of work at site with necessary permission from BHEL/NTPC within the quoted price.			
14.2	Further necessary network for construction & drinking water system shall be done by the bidder at his own cost.			
14.3	Contractor should arrange for water for labour colony of their own.			
14.4	BHEL shall not be responsible for any inconvenience or delay caused due to any interruption of water supply and the contractor shall claim no compensation for delay in work for such interruption. Contractor may make standby arrangement for water at their own cost.			
14.5	Contractor will have to arrange for storage of water to meet the day-to-day requirement.			
14.6	The availability of water (construction as well as drinking) may be limited. Contractor shall ensure that no water is wasted. In this regard the contractor shall take all necessary measure towards preservation of water.			
15.0	ELECTRICITY			
15.1	BHEL shall provide construction power free of charge at 415V level at one point. Contractor has to make their own distribution arrangement to draw electricity. You have to Install energy meter at the incoming point of electricity in your distribution board, as instructed by BHEL site engineer , to keep the record of energy consumption. Overall area illumination will be provided by BHEL. However, for night working, contractor should arrange sufficient work specific illumination as per requirement.			

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 11 OF 25

15.2	The bidder shall have to provide earth leakage circuit breaker at each point wherever human operated electrical drives/ T&Ps are deployed.
15.3	The power supply will be from the available grid. BHEL shall not be responsible for any inconvenience or delay caused due to any interruption of power supply/ variation in voltage level and no compensation for delay in work can be claimed by the contractor due to such non-supply on the grounds of idle labour, machinery or any other grounds.
15.4	Bidder will have to arrange sufficient illumination for their stores, office and labour colonies etc.
15.5	The contractor should ensure that the work in critical areas is not held up in the event of power breakdown. In the event of breakdown in the electric supply, if the progress of work is hampered, it will be the responsibility of the contractor to step up the progress of work after restoration of electric supply so that overall progress of work is not affected.
15.6	The contractor shall have to make arrangement at their own cost for illumination that will be required in the working area for execution of the work & safety of workmen.
15.7	Contractor shall make arrangement of electricity of their own for labour colony.
16.0	CONSUMABLE
16.1	All consumables, like gas, electrodes, chemicals, lubricants etc. required for the scope of work, shall be arranged by the contractor at his cost unless otherwise specifically mentioned in the contract.
16.2	All consumables to be used for the job shall have to be approved by NTPC / BHEL prior to use.
16.3	In the event of failure of contractor to bring necessary and sufficient consumables, BHEL may arrange for the same at the risk and cost of the contractor. The entire cost towards this along-with overhead shall be paid by the contractor or deducted from the contractor's bills.
17.0	TEST CERTIFICATES
	Necessary test certificates of all materials supplied by contractor are to be produced to BHEL prior to use of those materials.
18.0	PROJECT MANAGEMENT/ CONSTRUCTION MANAGEMENT
	To meet the need of construction management at site, contractor shall provide the following services within quoted / accepted rates.
18.1	PLANNING & MONITORING
18.1.1	The bidder shall prepare detail construction schedule (L-3) as per completion dates given in this document. This schedule must include all milestone and key activities for each sub-systems / components in the areas of engineering (wherever applicable), procurement, manufacture (wherever applicable), cogniz, excavation/ construction/ erection. This network must conform to the overall project schedule. The bidder should also ensure monitoring of these activities at least weekly basis to start with and on daily basis whenever required by BHEL.
18.1.2	The bidder shall also prepare progress report indicating progress on key activities, management summary for critical activities, list of actions requiring attention of BHEL. This schedule is to be preferably made in PRIMAVERA/ MS PROJECTS, so that the same is compatible with BHEL's project management software.
18.2	PROGRESS REPORTING
18.2.1	The bidder shall submit daily, weekly and monthly progress reports for work force, materials reports, consumables (gases/electrodes) report and other reports as per pro-forma considered necessary by the BHEL. In case of any failure on contractor's part to comply with this, BHEL may at its discretion, consider to withhold part payment against their RA bills.
18.2.2	The progress report shall indicate the progress achieved against planned with reasons indicating delays, if any, and shall give the remedial actions which the contractor intends to take to make good the slippage or lost time, so that further works again proceed as per the original program and the slippages do not accumulate and effect the overall program.
18.2.3	The daily work force reports shall clearly indicate the work force deployed, category-wise specifying also the activities in which they are engaged.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 12 OF 25

18.2.4	Weekly progress review meetings will be held at site during which actual progress during the week vis-à-vis scheduled program shall be discussed or actions to be taken for achieving targets. For discussions, the contractor shall present program of subsequent week. The contractor shall constantly update/revise his work program to meet the overall requirement.	
18.2.5	Periodic progress reviews on the entire activities of execution in respect of supply and works in scope of bidder will be held once in a month at Kolkata / Site. These meetings will be attended by reasonably higher officials of the contractor and will be used as a forum for discussing all areas where progress needs to be speeded up. The contractor shall be further responsible for ensuring that suitable steps are taken to meet various targets decided upon such meetings.	
18.2.6	During construction, contractor shall submit BHEL colour digital photograph / slides (indicating date) for each month, as per instruction of BHEL engineer , showing the work progress of site In case of failure in providing such photograph in each month, an amount of Rs. 20,000/- per month shall be deducted from contractor's RA bill.	
18.2.7	Successful bidder has to provide for electronic/ computerized storing and re-production/ printing/ plotting of various data, log sheets, protocols, measurements etc. These may be stored in CD (as per requirement) and handed over to BHEL as per requirement.	
18.3	SITE ORGANIZATION	
18.3.1	The contractor shall maintain a site organization of adequate strength in respect of manpower, construction machinery and other implements at all time for smooth execution of the contract headed by a competent construction manager for site operations with sufficient level of authority to take site decisions. The vendor will submit organization chart (showing the name of Site-in-charge) with individual bio-data indicating various levels of experts to be posted for supervision in the fields of supervision and execution, quality, material management, planning, safety, etc. The organization shall be reinforced from time to time, as required to make up slippage (if any) from the schedule without any commercial implication to BHEL. The organization chart is to be submitted within 10 days from the date of LOI.	
18.3.2	Following (minimum) engineering manpower with power plant construction background to be deployed at site by the successful vendor for their day to day supervision etc.	
18.3.2.1	Qualified safety officers with assistants (exclusive for safety supervision for project jobs).	Officer – One no. Assistant - Two nos.
18.3.2.2	Site supervising engineer and supervisors for piling work etc.	Two Engineers. Four Supervisors.
18.3.2.3	Engineer & Supervisors for quality inspection.	One Engineer & Two supervisors (Assistant).
18.3.3	Deputation of above man-power shall be jointly decided at site in line with construction schedule.	
18.3.4	Engineer/ supervisor for other functions like store & purchase, material management, planning, finance, administration etc are to be provided as per site requirement and not considered above.	
18.3.5	In the event of non deputation of engineer/ supervisor by the bidder as per above agreed schedule, BHEL shall reserve the right to deduct Rs 70,000 per man-month for engineer, Rs 50,000 per man-month for the supervisor/ safety officer and Rs. 35000 per man-month for safety supervisor from RA bills. Further induction of manpower regarding site supervisor & site engineer will be decided at site as per requirement without any financial implication.	
18.3.6	BHEL reserves the right to reject or approve the list of personnel proposed by the contractor. The persons whose bio-data have been approved by BHEL will have to be posted at site and deviation in this regard will not be permitted unless specific & reasonable justification is made.	
18.3.7	In addition to above, a well experienced qualified engineer to be designated, as 'Project Manager', shall be deployed by the contractor. Such engineer shall have adequate exposure	

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 13 OF 25

	on the job and shall remain fully involved in all planning activities, guidance etc to contractor's own team during the complete execution period of contract.	
18.3.8	The contractor should also submit to BHEL for approval a list of T&Ps along with their fitness certificates. The tools & tackles shall not be removed from site without written permission of BHEL.	
18.3.9	The contractor should also submit network programs for the erection of various items. These networks shall show the customer / BHEL hold points (CHP), which have to be cleared by customer/ BHEL, or their authorized representatives before further erection can take place. These programs for the erection would clearly identify responsibilities of the contractor and customer/ BHEL. It is the responsibility of the contractor to get the networks approved by BHEL within four weeks of the date of finalization of award of work/ placement of LOI.	
18.4	CONSTRUCTION MANAGEMENT	
18.4.1	Based on the approved program, the contractor shall submit a program of construction/ erection/ commissioning for the implementation. These programs would be amplified showing start of erection and subsequent activities and shall form the basis for site execution and detail monitoring. The three monthly rolling program with the first month's program being tentative based on the site condition would be prepared based on these programs. The contractor shall also be involved along with NTPC / BHEL to tie up detailed resources mobilization plan over the period of the contract matching with the performance targets.	
18.4.2	The program would be jointly finalized by the site in-charge of the contractor with BHEL/ NTPC's project coordinator as well as the site-planning representative. The erection program will also identify sequential events matching financial turnover.	
18.4.3	The contractor is liable to furnish all documentary evidences towards payment of Works Contract Tax as and when required by BHEL.	
18.4.4	Piling shall be done by using rotary hydraulic rig. Three stages flushing of pile bore shall be ensured by air lift technique or any other internationally accepted technique duly approved by NTPC / BHEL. The construction methodology to be adopted shall be suitable to ensure proper termination of pile in the starta as specified.	
19.0	TOOLS & PLANTS (TO BE PROVIDED BY CONTRACTOR)	
19.1	Tentative list of T&P to be deployed by contractor for successful completion of work is detailed below.	
19.2	It may be noted that the list is not exhaustive and is only for general guidance. The contractor is required to provide all necessary T&P (other than those specified to be provided by BHEL, if any) measuring (calibrated) instruments & handing equipments for timely completion of total work as per contract. In case of project requirement, some activities may have to pre-pone. In such cases the contractor may have to deploy additional T&P. Quoted rate shall be inclusive of such requirements. However, contractor shall submit deployment plan of all T&P along with tender bid.	
19.3	In the event of any failure on the part of the contractor, BHEL may at his discretion also terminate the contract on this ground and take out any or whole amount of the contract from the scope of the contractor. In the event of failure of contractor to deploy necessary and sufficient T&P/ IMTEs, BHEL will be at liberty to arrange the same at the risk & cost of contractor including transportation cost of same from any of BHEL site/ other agency & charges as applicable shall be deducted from contractor's RA bill. Decision of BHEL in this regard will be final & binding on contractor.	
19.4	Following major T&Ps to be arranged by contractor within the time as indicated against each T&P	
	Major T&P items	Mobilisation time (from the date of written intimation by BHEL to start the work)
19.4.1	1 no 10/12/14/18 MT Nextgen pick & carry type tyre mounted mobile crane.(like Escorts F15 Pick and Carry Eqpt.)	Within 15 days

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 14 OF 25

19.4.2	1 no Tractor – 15T.	As per site requirement
19.4.3	1 no Jack Hammer	As per site requirement
19.4.4	1 no Hydraulic Excavator/ Poclain.	As per site requirement
19.4.5	1 no JCB.	Within 15 days
19.4.6	4 nos Hydraulic Rotary Piling Rigs to achieve at least 400 nos piles per month with arrangement for boring in soil as well boring /drilling in rock (with diamond core cutter) alongwith required capacity of crane, compressor with all accessories for flushing of piles bore for air lift technique and water cleaning method, flushing pipe, tremie pipe, bentonite re-circulation pump, bentonite feed pump, hose pipe for bentonite re-circulation.	2 rigs within 30 days. Balance rigs to be deployed progressively as per site requirement
19.4.7	2 sets - Kentledge arrangement (preferably concrete blocks with structural arrangement) with high capacity hydraulic jack, dial gauges for vertical load test of pile.	Within 45 days
19.4.8	4 nos Transit Mixer (5 / 6 cum capacity)	3 no- Within 30 days. Additional 1 no- as per site requirement.
19.4.9	2 no Self Priming Dewatering Pump 5 HP (diesel / electric).	Within 15 days.
19.4.10	1 nos 10 HP Submersible Mono-Block Electric Pump (KOS-1040+ of Kirloskar or equivalent).	Within 45 days.
19.4.11	2 nos Self Priming Dewatering Pump 2 HP (diesel/ electric).	Within 15 days.
19.4.12	1 no Dozer.	Within 15 days.
19.4.13	3 nos Dumper.	2 no Within 15 days. Additional 1 no within 30-45 days.
19.4.14	3 no. Reinforcement Bending Machine.	2 nos Within 15 days. Additional 1 no within 30-45 days.
19.4.15	3 no Reinforcement Cutting Machine.	2 nos Within 15 days. Additional 1 no within 30-45 days.
19.4.16	1 no Compression Testing Machine (200 T cap).	Within 30 days.
19.4.17	2 no Total Station with adequate arrangement for surveyors..	1 st Within 15 days. 2 nd Within 30 days
19.4.18	2 nos Auto Level & Staff.	Within 15 days.
19.4.19	60 nos. Concrete Cube Moulds.	Within 30 days.
19.4.20	1 no of Small Truck 5T for movement within site.	As per requirement.
19.4.21	One no. Drinking Water Tank – 1000 lit.	Within 15 days.
19.4.22	1 no Truck Mounted Water Tank (minimum 3000 lit) capacity with sprinkler arrangement.	As per requirement.
19.4.23	Portable Fire Extinguishers as below Soda Acid – 3 sets. Dry Chemical Powder – 3 sets CO2 – 3 sets. Water & Sand Bucket (2 buckets in one stand) – 3 sets. Fire Hose with Nozzle (50 M length) – 3 sets.	Within 15 days
19.5	T&P shown in the above mentioned list are minimum requirement. Mobilisation schedule as mutually agreed at site for major T&Ps, have to be adhered to and no change will be permitted. Further requirement will be reviewed time to time at site and contractor will provide additional T&P/ equipments to ensure completion of entire work within schedule/target date of completion without any financial implication to BHEL. Vendor will give advance intimation & certification regarding capacity etc prior to dispatch of heavy equipments.	

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 15 OF 25

19.6	All T&P and all IMTEs, which are required for successful and timely execution of the work covered within the scope of this tender, shall be arranged and provided by the contractor at his own cost in working condition.	
19.7	In the event of non mobilisation of any T&P by the successful bidder and as a result progress of work suffered, BHEL reserves the right to deduct suitable amount from the dues of the bidder, with assigning reasons thereof at the following rates	
	Major T&P items	Recovery rates
19.7.1	10/12/14/18 MT Nextgen pick & carry type tyre mounted mobile crane.(like Escorts F15 Pick and Carry Eqpt.)	Rs. 15000/- per week or part thereof
19.7.2	Trailor – 15T	Rs. 10000/- per week or part thereof
19.7.3	Jack hammers	Rs. 1000/- per week or part thereof
19.7.4	hydraulic excavator / Poclain	Rs. 50000/- per week or part thereof
19.7.5	JCB / Pay Loader	Rs. 25000/- per week or part thereof
19.7.6	Hydraulic rotary piling rigs with arrangement for boring in soil as well boring /drilling in rock (with diamond core cutter) alongwith required capacity of crane, compressor with all accessories for flushing of piles bore for air lift technique and water cleaning method, flushing pipe, tremie pipe, bentonite re-circulation pump, bentonite feed pump, hose pipe for bentonite re-circulation.	Rs. 50000/- per week or part thereof
19.7.7	Kentledge arrangement (preferably concrete blocks with structural arrangement) with high capacity hydraulic jack, dial gauges for vertical load test of pile.	Rs. 10000/- per week or part thereof
19.7.8	Transit Mixer (5/6 M3 capacity),	Rs. 20000/- per week or part thereof
19.7.9	Self Priming Dewatering Pump 5 HP (diesel/ electric)	Rs. 1000/- per week or part thereof
19.7.10	10 HP Submersible Mono-Block Electric Pump (KOS-1040+ of Kirloskar or equivalent),	Rs. 2000/- per week or part thereof
19.7.11	Self Priming Dewatering Pump 2 HP (diesel/ electric)	Rs. 1000/- per week or part thereof
19.7.12	Dozer	Rs. 40000/- per week or part thereof
19.7.13	Dumper	Rs. 10000/- per week or part thereof
19.7.14	Reinforcement Bending Machine	Rs. 5000/- per week or part thereof
19.7.15	Reinforcement Cutting Machine	Rs. 5000/- per week or part thereof
19.7.16	Compression Testing Machine (200 T Cap)	Rs. 4000/- per week or part thereof
19.7.17	Total station with adequate arrangement for Surveyors.	Rs. 5000/- per week or part thereof
19.7.18	Auto level & staff	Rs. 5000/- per week or part thereof
19.7.19	Drinking water tank – 1000 lit.	Rs. 1000/- per week or part thereof
19.7.20	Truck mounted water tank (minimum 3000 lit) capacity with sprinkler arrangement.	Rs. 5000/- per week or part thereof
19.7.21	Portable Fire Extinguishers as below Soda Acid. Dry Chemical Powder CO2. Water & Sand Bucket (2 buckets in one stand) Fire Hose with Nozzle (50 M length)	Rs. 1000/- per week or part thereof for any item
19.7.22	Any other instrument	As per discretion of the engineer
20.0	INSURANCE	
20.1	BHEL shall arrange comprehensive MCE (marine cum erection) Insurance Policy for total project supply & services including balance of plant package covering transit risks & loss, destruction or damage during handling at Site, Storage, civil works ,erection, testing and commissioning up to trial operation completion of unit including theft, sabotage, fire, lightning and other natural calamities.	

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 16 OF 25

20.2	Contractor shall report to BHEL in writing any damages to equipment/components on receipt, storing, and during withdrawal of the materials from stores, in transit to site and unloading at place of work and during erection and commissioning till trial operation completion including handing over. The above report shall be as prescribed by BHEL site management. Any consequential loss arising out of non-compliance of this stipulation will be borne by contractor.
20.3	The contractor will take necessary precautions/ due care to protect the material at Project site, while in his custody from any damage/ loss till the same is handed over to BHEL/ customer at Project site. For lodging/ processing of insurance claim the contractor will submit necessary documents. BHEL will reserve the right to recover the loss from the contractor as detailed below in case the damage/loss is due to negligence/ carelessness on the part of the contractor. In case of theft of material under contractor's custody, the same shall be reported to police by the contractor immediately and copy of FIR and subsequently police investigation report shall be submitted to BHEL/ customer for taking up with insurance. However, this will not relieve the contractor of his contractual obligation for the materials in his custody.
20.4	In case the damage/loss/theft of materials are attributable to negligence/failure in discharging the duties and obligations of the contractor, the expenses incurred for repair/replacement of such components in excess of the amount realized from the underwriters, limited to Normal Excess (Deductible Franchise) shall be recovered from the contractor.
20.5	Other conditions of Insurance shall be as per relevant clause of GCC/SCC.
21.0	MATERIAL HANDLING (BHEL ISSUED MATERIAL)
21.1	Reinforcement Steel and Ready Mix Concrete will be issued free of cost by BHEL for use in the work covered in this contract. The reinforcement steel as received from the manufacturer / supplier shall be issued directly to the contractor as received by BHEL, on weighment basis from its supplier, as per delivery challan of supplier.
21.2	All other materials required for proper completion of job shall be provided by bidder. Bidder's total quoted price, shall be inclusive of these.
21.3	It would be the responsibility of the contractor to keep in constant contact with BHEL / site to find out the reinforcement steel delivery status, arrival of the consignments and arrange for escort to accompany the truck / trailer for transportation of above materials by BHEL'S supplier, as necessary. The lorry, truck way bill for the consignment as shall be received by BHEL would be handed over to the contractor immediately for unloading of materials including all arrangement for necessary gate passes etc. All arrangement for necessary gate passes etc shall be the responsibility of contractor.
21.4	Payment of all demurrages that may result due to contractor's fault / delay would be the responsibility of the contractor. If BHEL have to make payment of demurrage together with freight, the amount so paid as demurrages for the reasons stated above, shall be recovered from the bills of the contractor. The decision of BHEL's engineer in this regard will be final and binding on the contractor. However the contractor has to clear all such charges, if any in this regard and complete the job without waiting for BHEL's decision
21.5	It would be the responsibility of the contractor to sign on the delivery book acknowledgement slip of supplier / transport authorities etc. & to submit computerized account of all such consignments of materials received by them, daily to BHEL.
21.6	Consignments coming on Sundays and holidays are also required to be handled/ unloaded by the contractor. Since the offices and stores will probably remain closed on such days, it will be the responsibility of the contractor to contact BHEL engineers at their residence and obtain instructions for unloading and storage.
21.7	Since the consignments are expected to arrive during any time of the day or night, contractor may have to keep his workmen round the clock at site as well as other places if required to unload the materials immediately on arrival.
21.8	BHEL reserve the right to recover from the contractor any loss arising out of damage/ theft or any other causes of the materials issued to him at any point.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 17 OF 25

21.9	Alternately , Reinforcement Steel may be issued to the contractor from BHEL / customer's store within the plant premises, on weighment basis. Receipt from BHEL / customer's stores, handling/ transportation to work site, unloading etc will be under the scope of work within his quoted rate.
21.10	Open land (free from encumbrance) shall be provided by BHEL on free of cost basis. Contractor shall maintain one centralized fenced store cum bar bending yard (Area approx 70mx70m). Hard surfacing of this yard and all round drain shall be carried out by the contractor at his own cost within the quoted rate.
21.11	The contractor shall in no case be entitled for any compensation or damages on account of any delay in supply or non-supply thereof for all or any such material.
21.12	No material shall be issued to the contractor except as those indicated above i.e. Reinforcement steel & Ready Mix Concrete unless otherwise expressly provided for in the contract. Contractor will have to make his own arrangement at his own cost for procurement of any other material as required for the works and of such quality as acceptable to BHEL.
21.13	The contractor shall maintain proper store account for all the BHEL issued materials and shall give three copies of once in two months computerised reconciliation statement of such account to the BHEL.
21.14	The contractor shall solely be responsible for the safety & quality of material after it is handed over and issued to contractor by BHEL.
21.15	BHEL issued materials shall not under any circumstances taken out of the project site unless otherwise permitted by BHEL.
22.0	ISSUE OF MATERIALS
22.1	ISSUE OF STEEL
22.1.1	The reinforcement steel as received from the manufacturer / supplier shall be issued directly to the contractor free of cost on the following basis.
22.1.2	Reinforcement steel (TMT)
22.1.3	All the steel reinforcement (TMT), issued by the BHEL shall be properly accounted for. The total quantity of steel required for the work will be calculated from the approved Bar Bending schedule, fabrication drawings. The measurement for payment as well as for accounting shall be based on the sectional weights as indicated in the following/applicable latest IS specifications. Reinforcement Fe-500 confirming to IS: 1786. or grade-1 of IS:432 (part-I)
22.1.4	In case any such sectional weights are not available in the above documents, the manufacturer recommendation shall be binding.
22.1.5	The steel issued to the contractor shall be mainly in standard length and sections as received from the supplier. However, the contractor shall be bound to accept the steel in length as available in the project stores no claims for extra payment because of issue of non-standard length will be entertained.
22.1.6	The contractor shall satisfy himself of the quality and quantity of the materials at the time of taking delivery from BHEL / NTPC stores. No claims whatsoever will be entertained by BHEL because of quality or quantity after the materials are taken by the contractor from BHEL/ NTPC stores.
22.1.7	The contractor shall submit to the engineer, a statement indicating estimated quantity of Ready Mix Concrete and steel required at least two months in advance. In addition, the contractor shall also furnish the estimated requirement of Ready Mix Concrete and steel during next month by the third week of the current month. Failing which BHEL will not responsible to ensure supply of Ready Mix Concrete and steel. Delay in completion if any for the same shall be in bidders account.
22.1.8	Bidder to note that all fasteners like MS/HT/HSFG bolts/nuts, lock nuts, washers etc, required for completion of work pertaining to his scope, shall be supplied by the bidder within the total quoted price.
22.1.9	Bidder to note that cement and steel required for his enabling job like store/site office etc shall be arranged at his own cost.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 18 OF 25

22.2	ISSUE OF READY MIX CONCRETE		
22.2.1	Bidder has to give a receipt of quantity of Ready Mix Concrete at the time of taking of concrete at batching plant. For ensuring quantity, bidder may check the print out of concrete from batching plant.		
23.0	RETURN OF MATERIALS		
23.1	RETURN OF STEEL INCLUDING SCRAP		
23.1.1	All surplus steel and all wastage materials will be taken back on weighment basis.		
23.1.2	Surplus, unused and un-tampered steel shall be sorted section-wise and returned separately for a place directed by BHEL - Engineer within the project area; Return of such materials will not be entitled to any handling and incidental charges.		
23.1.3	All wastage / scrap (including wastage, unusable scrap) shall be returned to the stores on weighment basis and a receipt obtained for material accounting purposes. Return of such material will not be entitled to any additional cost due handling and transportation and incidental charge.		
23.1.4	Scrap for reinforcement steel and structural steel shall be returned separately.		
23.2	RETURN OF READY MIX CONCRETE		
23.2.1	Under any circumstances, Ready Mix Concrete will not be taken back. Bidder to plan accordingly for proper use of Ready Mix Concrete.		
24.0	CEMENT & STEEL CONSUMPTION AND WASTAGE		
24.1	REINFORCEMENT STEEL CONSUMPTION		
24.1.1	The theoretical consumption of various diameter of reinforcement shall be based on approved construction drawing and bar bending schedule. Weight shall be calculated considering the sectional weights as per Indian standards. No extra cost shall be payable to the contractor for any deviation in weights for the different procedures adopted for issue and calculation of the theoretical consumption including rolling tolerances.		
24.1.2	Actual consumption = Issue – Surplus.		
24.1.3	Surplus = Un-tampered and unused quantity of steel returned by the contractor to BHEL store along-with relevant documents.		
24.1.4	Wastage = Actual consumption – Theoretical consumption.		
24.2	READY MIX CONCRETE CONSUMPTION		
24.2.1	The theoretical consumption of various grade of based on approved construction drawing. Quantity shall be calculated considering the volume of concrete as per approved drawing. No extra cost shall be payable to the contractor for any deviation in quantity of Ready Mix Concrete received from the Batching Plant and actual use at site.		
24.3	REINFORCEMENT STEEL WASTAGE		
24.3.1	Allowable wastage: (+4%) of the theoretical consumption shall be considered as allowable wastage.		
24.3.2	Wastage and scrap shall be as per actual weighment basis.		
24.3.3	Sl no	Reinforcement steel	Basis of issue & penal recovery
	R-1	Theoretical consumption (without considering wastage and scrap or loss)	Free
	R-2a	Wastage limited to plus three percent (+3%) of aforesaid theoretical consumption (R-1) towards allowable wastage and return to BHEL Store.	Free
	R-2b	Wastage limited to plus three percent (+3%) of aforesaid theoretical consumption (R-1) towards allowable wastage but not returned to BHEL Store.	Penal rate
	R-3	Wastage beyond four percent (+4%) of the theoretical consumption above (R-1).	Penal rate
24.4	READY MIX CONCRETE WASTAGE		
24.4.1	Allowable wastage: +1.5% of the theoretical consumption shall be considered as allowable wastage.		

TENDER NO – PSER:SCT:NBH-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 19 OF 25

25.0	RECONCILIATION OF BHEL ISSUED MATERIALS	
25.1	The contractor shall submit a reconciliation statement of steel issued to him, once in a months. The same may be submitted alongwith RA Bill.	
25.2	The contractor shall properly account for the material issued to him as specified herein to the satisfaction of BHEL certifying that the balance material are available with contractor's custody at site.	
25.3	If it is noticed by BHEL that the wastage is high and calls recovery at the penal rate, then BHEL will proceed for recovery for the excess wastage as per penal recovery rates as specified from RA bill.	
25.4	The approved drawings/ bar bending schedules are to be considered for the purpose of reconciliation of materials.	
26.0	RECOVERY OF MATERIAL	
26.1	If wastage exceeds the specified limit, the recovery of excess wastage shall be made from monthly RA bill at the penal rate stipulated below.	
26.2	PENAL RATE OF MATERIALS	
	Item	Penal rate (Rs)
26.2.1	Reinforcement steel	75,000 per MT.
26.2.2	Ready Mix Concrete	
	M - 7.5	6,500 per Cum
	M - 10	7,000 per Cum
	M - 15	7,850 per Cum
	M - 20	8,600 per Cum
	M - 25	8,700 per Cum
	M – 30	8,900 per Cum
	M - 35	12,300 per Cum
	M - 40	12,600 per Cum
27.0	CONSTRUCTION OF TEMPORARY OFFICE, STORES ETC	
	The contractor shall arrange at his own cost cleaning of area allotted, construction of his temporary office, stores, cement godown etc. and also the watch and ward of all the above. Materials required for the same shall be provided by contractor at his own cost.	
28.0	CIVIL LABORATORY AT SITE	
	Contractor shall establish and maintain civil laboratory with necessary equipment (as per Annexure-A) for conducting relevant site tests, as required.	
29.0	CONSTRUCTION SCHEDULE	
29.1	Entire work shall be carried out in accordance with the construction schedule given below, within the stipulated completion period. Within 30 days of LOI, the contractor shall discuss with BHEL site engineer & furnish the (L-3) construction schedule indicating all milestones on the basis of major activities and get it approved from BHEL Engineer.	
29.2	Schedule for major Milestone construction activities covered under the scope of work is as below.	
	Major Milestone activity description	
29.2.1	Piling Works for Absorber	02 months (M1)
29.2.2	Piling works for Wet Limestone Ball Mill	03 months
29.2.3	Piling works for Ball mill Building/Limestone grinding house	04 months
29.2.4	Piling works for FGD Control Room Building	05 months (M2)
29.2.5	Piling works for Lime Stone Storage Silo	07 months
29.2.6	Piling works all balace area	08 months
29.3	The contractor shall plan his work in such a manner so as to meet the overall project schedule, in consultation with BHEL/ customer engineer.	
29.4	Contractor shall submit daily work program based on above construction schedule.	
30.0	COMPLETION PERIOD	

TENDER NO – PSER:SCT:NBH-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 20 OF 25

30.1	The entire work under this scope shall be successfully completed in all respect within 8 (Eight) months from the date of start of work as certified by Construction Manager, BHEL.
30.2	Contractor shall mobilise resources to start the work within 15 days from date of intimation of BHEL.
30.3	However, actual date of start of work shall be reckoned based on certification of BHEL Site Construction manager,
31.0	LIQUIDATED DAMAGE/ PENALTY
31.1	Intermediate Milestones
31.1.1	In case delay in achieving the Milestone M1 as mentioned in Clause 29.2.1 above, is solely attributable to the contractor, 0.5% per week of executable contract value, limited to maximum 2% of executable contract value, will be withheld.
31.1.2	In case delay in achieving the Milestone M2 as mentioned in Clause 29.2.4 above, is solely attributable to the contractor, 0.5% per week of executable contract value, limited to maximum 3% of executable contract value, will be withheld.
31.1.3	Amount already withheld, if any against slippage of clause 29.2.1, 29.2.4 above, shall be released only if there is no delay attributable to contractor in achievement of Milestone as mentioned in clause 29.2.6 above.
31.1.4	Amount to be withheld on account of slippage of identified intermediate milestone(s) shall be withheld out of respective milestone payment and balance amount (if any) shall be withheld @10% of RA Bill amount from subsequent RA bills.
31.1.5	Final deduction towards LD (if applicable), on account of delay attributable to contractor shall be based on final delay analysis on completion / closure of contract. Withheld amount, if any due to slippage of identified intermediate milestones shall be adjusted against LD or released as the case may be.
31.1.6	In case of termination of contract due to any reason attributable to contractor before completion of work, the amount already withheld against slippage of intermediate milestones shall not be released and be converted into recovery.
31.2	Overall Completion
31.2.1	If Completion of work goes beyond specified Overall Completion Period (cl. no. 30.1) due to reasons attributable to contractor LD will be imposed @ 0.50% of the contract value per week of delay or part there of subject to maximum LD amount 10% of total contract value. Overall LD including LD against intermediate milestones shall be limited to maximum 10% of total contract value. All other terms shall be as per the provision of GCC in this regard.
31.2.2	BHEL reserve the right to cancel the order/ contract or a portion thereof at the risk & cost of the contractor and the contractor shall be liable to BHEL for any excess costs thereof.
31.3	In case of LD recovery, the applicable GST shall also be recovered from the contractor.
32.0	CERTIFICATE TOWARDS COMPLETION
	The work under the scope of the contractor shall be deemed to have been completed in all respects only when so certified by BHEL/ customer. Decision of BHEL in this regard shall be final and binding on the contractor.
33.0	GUARANTEE
33.1	Even though the work will be carried out under supervision of BHEL, the contractor will be responsible for the quality of workmanship, quality of materials/ items and design for which the contractor is responsible.
33.2	The contractor shall guarantee the work executed under the scope of the contract for a period of 12 (twelve) months from the date of start of guarantee period as certified by the engineer (ie on completion of total work under scope and taking over by BHEL) and shall rectify free of cost all defects due to faulty supply or work done. In case the contractor fails to repair/ replace the defective works within the time specified by the engineer, BHEL may proceed to undertake the repairs/ replace such defective works at contractor's risk and cost without prejudice to any other rights and recover the same from security deposit/ other dues.
34.0	INTEREST BEARING RECOVERABLE ADVANCE/ MOBILISATION ADVANCE

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 21 OF 25

	Not applicable for this tender.
35.0	OVER RUN CHARGES
	Not applicable for this tender.
36.0	REVISION ON ACCEPTED CONTRACT RATE
	Not applicable in this tender.
37.0	PRICE VARIATION CLAUSE
	Not applicable for this tender.
38.0	EXTRA/ ADDITIONAL ITEMS OF WORK
	It shall be as per GCC.
39.0	SECURITY DEPOSIT, PERFORMANCE BOND & FINAL BILL
39.1	Security deposit shall be applicable as per relevant clause of GCC (Volume-IB).
39.2	Performance bond is not applicable for the tender.
39.3	RELEASE OF SD BANK GUARANTEE (BG) AND FINAL BILL
	In addition to other provisions of tender regarding release of SD and final bill, following provisions shall also be governing to this tender.
39.3.1	For SD BG- further extension beyond date of acceptance of final bill will not be enforced if the following is fulfilled.
39.3.1.1	Contractor discharges their responsibility in r/o of submission of final bill alongwith absolute 'No Demand Certificate' and other documents as detailed below to the satisfaction of BHEL.
39.3.1.2	Joint protocol of set of documents as submitted as detailed in below is certified by site & contractor's representative.
39.3.1.3	There is no negative value of the final bill (after release of SD BG) - site to certify the same before release of SD BG.
39.3.1.4	Contractor has returned the property belonging to BHEL - site to certify the same before release of SD BG.
39.3.1.5	Contractor has submitted joint protocol against 'Delay analysis', if applicable for delayed execution of job.
39.3.2	List of documents to be submitted & jointly protocolled indicating acceptance of final bill by BHEL.
39.3.2.1	Final bill.
39.3.2.2	Measurement for final bill signed, jointly signed by BHEL & contractor's representative.
39.3.2.3	Statement having cumulative joint measurement for the contract, jointly signed by BHEL & contractor's representative.
39.3.2.4	Claim by contractor for refund of security deposit.
39.3.2.5	Jointly signed material reconciliation statement.
39.3.2.6	Statement of payment received from BHEL – Bill wise (Including RA/ PVC/ ORC/ rate revision/ extra work).
39.3.2.7	No claim certificate by contractor.
39.3.2.8	Clearance certificates wherever applicable, viz clearance certificates from customer, various statutory authorities, like Labour Department, PF Authorities, Commercial Department, etc.
39.3.2.9	Notarized Indemnity Bond as per prescribed format.
40.0	TAXES, DUTIES ETC
40.1	All taxes excluding GST & BOCW Cess (as specified elsewhere in the tender) but including, Charges, Royalties, any State or Central Levy and other taxes for materials if any obtained for the work and for execution of the contract shall be borne by successful bidder and shall not be payable extra by BHEL. Any increase of above at any stage during execution of contract, including extension of the contract, shall have to be borne by successful bidder contractor. Bidder's quoted/ accepted rates/ price shall be inclusive of all such requirements.
40.2	GST along with Cess (as applicable) legally leviable & payable by successful bidder as per GST Law shall be paid by BHEL, extra. Hence, bidder shall not include GST along with Cess (as applicable) in their quoted rates/ price.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 22 OF 25

40.3	Successful bidder shall furnish proof of GST registration with GSTN Portal covering the services under this contract. Registration should also bear endorsement for the premises from where the billing shall be done by successful bidder on BHEL for this project / work.
40.4	Since GST on output will be paid by BHEL separately as enumerated above, bidder's your quoted rates / price should be after considering the Input Credit under GST law at bidder's end.
40.5	TDS under Income Tax shall be deducted at prevailing rates on gross invoice value from the running bills (RA bills) unless exemption certificate from the appropriate authority / authorities is furnished.
40.6	TDS under GST shall be deducted at applicable rates on gross invoice value from the running bills (RA bills).
40.7	Bidder shall note that GST Tax Invoice complying with GST Invoice Rules (Section 31 of GST Act & Rules referred thereunder) wherein the 'Bill To' details shall encompass following. BHEL GSTN – Refer attached GSTN code table of BHEL. Name - BHARAT HEAVY ELECTRICALS LIMITED Address - Shall be intimated later. Specific details of BHEL GSTN, Name and Address as stated above, have been specified elsewhere in the tender.
40.8	Successful bidder to intimate immediately on the day of removal of goods (in case of any supply of goods) to BHEL along with all relevant details and send a scanned copy of Tax Invoice to BHEL through following communication mode for enabling BHEL to meet its GST related compliances. Portal address. and Email address – Shall be intimated later. Specific details of above shall be intimated to successful bidder by BHEL at appropriate juncture.
40.9	In case of delay in submission of above mentioned documents on the date of despatch, BHEL may incur penalty / interest for not adhering to Invoicing Rules under GST Law. The same will be liable to be recovered from successful bidder, in case such delay is not attributable to BHEL.
40.10	In case of raising any Supplementary Tax Invoice (Debit / Credit Note), successful bidder shall issue the same containing all the details as referred to in Section 34 read with Section 31 of GST Act & Rules referred there under.
40.11	Successful bidder shall comply with the Time Limit prescribed under the GST Law and rules thereof for raising of the Tax Invoice. If any supply of goods is applicable, successful bidder shall also ensure prompt delivery of goods after despatch.
40.12	Bidder shall note that in case GST credit is delayed / denied to BHEL due to delayed / non receipt of goods and / or Tax Invoice or expiry of the timeline prescribed in GST Law for availing such ITC, or any other reasons, not attributable to BHEL, GST amount shall be recoverable from successful bidder along with interest levied/ leviable on BHEL, as the case may be.
40.13	Successful bidder shall upload the invoices raised on BHEL in GSTR-1 within the prescribed time as given in the GST Act. Bidder shall note that in case of delay in declaring such invoice in your return and GST credit availed by BHEL is denied or reversed subsequently as per GST Law, GST amount paid by BHEL towards such ITC reversal as per GST law shall be recoverable from the successful bidder along with interest levied / leviable on BHEL.
40.14	Way Bill: Successful bidder to arrange for way bill / e-waybill for any transfer of goods for the execution of the contract. Successful bidder has to make their own arrangement at their cost for completing the formalities, if required, with Issuing Authorities, for bringing materials, plants & machinery at site for execution of the works under this contract, Road Permit / Way Bill, if required, shall be arranged by successful bidder and BHEL will not supply any Road Permit/ Way Bill for this purpose.
40.15	Any new taxes & duties, if imposed subsequent to due date of offer submission as per NIT & TCN, by statutory authority during contract period (including extension, if the same is not attributable to you), shall be reimbursed by BHEL on production of relevant supporting document to the satisfaction of BHEL. However, you shall obtain prior approval from BHEL before depositing new taxes and duties.
40.16	Benefits and / or abolition of all existing taxes must be passed on to BHEL against new taxes, if any, proposed to be introduced at a later date.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 23 OF 25

41.0	INTERIM PAYMENTS
41.1	For all items of work as per Volume-III, Price Schedule, interim payment shall be limited to 95 % of the gross value of interim bill on item rate basis. The balance 5 % shall be payable on completion of guarantee period and subject to confirmation of full GST. However, this 5 %, retained from each RA bill, may be released against submission of a separate bank guarantee as per Performance Bank Guarantee format, to be kept valid till final bill & guarantee period, subject to (i) Receipt of certificate that all works are completed in all respects; (ii) Reconciliation of materials / T&P / IMTE; (iii) Completion of final bill formalities (iv) handing over to BHEL / customer and (v) subject to confirmation of full GST. Any Interest if levied thereon for reasons elaborated in Tax & duties clause of the contract and attributable to you shall be recovered for the Final Payment/ Retention amount.
41.2	All admissible recovery / adjustments etc. shall be made from the interim payable amount.
41.3	Out of this 95 %, 1.5 % of gross bill amount shall be paid in the following manner on certification by BHEL engineer after compliance of each of following activity in each month. In case of non-fulfilment of respective activity by vendor in each month, no payment shall be made by BHEL against corresponding activity and no claim of bidder at a later date, whatsoever, in this regard shall be entertained by BHEL.
41.3.1	0.7 % shall be paid on compliance of house keeping of vendor's working area and store/ office areas.
41.3.2	0.3 % shall be paid on compliance of general illumination of vendor's working area and stores, office area.
41.3.3	0.2 % shall be paid on compliance of applicable OHSAS requirement as per guidelines of BHEL/ PSER and as specified in the tender.
41.3.4	0.3 % shall be paid on compliance of applicable safety requirement as per guidelines of BHEL/ PSER and as specified in the tender.
41.4	BHEL site at its discretion may further split up the above percentages of break up and effect payment to suit the site condition, cash flow requirement, according to the progress of work.
41.5	The contractor shall submit his running bill, once in a month at the end of each month. The RA bill complete in all respect, accompanied by BHEL engineers certified measurement sheets, jointly signed, will be paid after 45 days of submission of bill, subject to completeness and correctness. Income Tax at the prevailing rates on gross value of work done & applicable surcharge shall be deducted from contractor's bill, unless exempted by Income Tax Authority.
41.6	Applicable GST, which can be claimed at any point, shall be released to you upon compliance of following:
41.7	You declaring such Invoice in your GSTR-1
41.8	Receipt of Goods / services and Tax Invoice by BHEL
41.9	Confirmation of payment of GST thereon by you on GSTN Portal
41.10	Above is subject to receipt of goods / service and tax invoice thereof along with you declaring invoice in your return and paying GST within timeline prescribed for availing ITC by BHEL.
42.0	CONTRACT PRICE
42.1	The bidder shall quote their total price strictly in accordance with prescribed price/rate schedule -Volume-III (SCH-1).
42.2	The quantities of the various items mentioned in the respective Price schedules, Volume-III are approximate, based on very preliminary information and may vary to any extent or may be deleted altogether. The derived rates, as apportioned from total quoted price in Sch-1 of Price schedule, of each item will remain firm throughout the period of execution including extension, for reasons whatsoever, as long as variation in the total value of the work executed under any part of this contract including extra items, if any, but excluding any price variation, remains within +/- 15 % (plus/minus fifteen percent) of the awarded price (as per LOI / WO).
42.3	The quoted rates shall remain firm irrespective of any variations in the individual quantities. No compensation becomes payable in case the variation of the final executed contract value is within the limits of Plus (+) or Minus (-) 15% of awarded contract value.

TENDER NO – PSER:SCT:NBN-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 24 OF 25

42.4	Compensation due to variation of final executed value in excess of the limits defined in clause above, shall be as follows:
42.4.1	In case the finally executed contract value reduces below the lower limit of Contract Value due to quantity variation specified above, the contractor will be eligible for compensation @ 15% of the difference between the lower limit of the contract value and the actual executed value.
42.4.2	In case the finally executed contract value increases above the upper limit of Contract Value due to quantity variation specified above, there will be no revision in the rates as apportioned
43.0	METHOD OF MEASUREMENT
	Mode of measurement shall be as per relevant clauses of technical specification of this tender. In case the same is not available the relevant IS 1200 in conjunction of IS code 3385 shall be adopted. In case the same is also not available, the standard procedure adopted in CPWD shall be adopted. In case the same is also not available in CPWD, the measurement of the work done will be based on the mutual agreement between BHEL and contractor. In all the above cases, the interpretation of BHEL will be final and binding to the contractor.
44.0	OTHER TERMS
44.1	While bidder's scope includes deployment of all resources, like T&P, materials, consumables, manpower including supervision etc for proper completion of the subject job and no sub-contracting for execution of the job is allowed by BHEL, depending on project's requirement and on prior acceptance of BHEL, bidder may associate agencies for deployment of skilled/unskilled manpower only for site execution. Bidder should arrange all resources, like T&P, materials, consumables, supervision etc directly for the subject job.
44.2	All other term & conditions of this specification, not mentioned above shall be governed by the pertinent provisions of GCC, Volume-IB.

TENDER NO – PSER:SCT:NBH-C2027:20		
VOLUME-IF-TCC-CML (REV-00)	TECHNICAL CONDITIONS OF CONTRACT, SCOPE ETC	PAGE 25 OF 25

ANNEXURE - A
LIST OF EQUIPMENTS FOR CIVIL SITE LABORATORY

SL NO	NAME OF TEST	NAME OF EQUIPMENT	SIZE OF EQUIPMENT	REF
CONCRETE TESTING EQUIPMENT				
1	Concrete Cube casting	Concrete Cube Mould	150x150x150mm	IS 10086
2	Workability of concrete	Slump cone	Standard, at least 02 nos	IS 456
3	Concrete Compressive test	Compressive Testing Machine with 2000 KN capacity.	2000KN capacity	IS 2505
PROCESS CONTROL ACCESSORIES				
SL. NO.	EQUIPMENT	SPECIFICATION / QTY.	REMARKS	
1	Hot air oven	Temperature range 50° C to 300° C	600x600x600mm (min.size)	
2	Physical balance	20 kg capacity	Weights 20g to 10 kg	
3	Thermometer	2Nos. Temperature range 0° C to 100° C	Digital / Analogue	
4	Digital pH meter	02 nos	0.01 mm least count,	
5	Mud Balance	02 nos	Range of 0.8 to 2.5	
6	Dial gauge	08 Nos.	0.01 mm least count,	
7	Hydraulic Jack with Calibrated Pressure Gauge	04 Nos.	2 Nos. 800 MT Capacity & 2 Nos. 600 MT Capacity	
8	Slurry Sampler	02 sets		
9	Marsh Funnel and Cup	02 sets		



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019


SHEET 1 OF 17

**FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE FOR NPGCPL
NABINAGAR STPP (3x660 MW)**

VOLUME: IIB

SECTION - C

**SPECIFIC TECHNICAL REQUIREMENTS FOR CIVIL,
STRUCTURAL & ARCHITECTURAL WORKS**



Bharat Heavy Electricals Limited

**Project Engineering Management
Power Sector, BHEL**



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 2 OF 17

CONTENTS

PART-I	:	GENERAL CIVIL REQUIREMENT
PART-II	:	SPECIFIC DESIGN REQUIREMENTS - CIVIL



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 3 OF 17

PART-I

GENERAL CIVIL REQUIREMENT



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 4 OF 17

1. GENERAL

Two Volumes-Section C & Section D of this specification cover site survey, soil investigation, site development works, design and construction of Civil, Structural and Architectural works. The scope of works covers complete Civil, Structural and Architectural Works including supply of all materials, labour, tools and plants as required for successful execution of the packages. This Part-I of Section-C Lists Codes and Standards to be adopted and the principal structures of the plant, and briefly describes the basic concept, requirements and features pertinent to each. **If there is any ambiguity and/or contradiction between Section C and Section D, the provisions / requirements laid in Section C shall prevail. In case of ambiguity between BOQ and Part C former shall prevail.**

(Contractor shall read the parts of the specification relevant to the contract and shall ignore the other parts of the specification. Relevant clauses of this section as applicable for respective package to be followed.)

2. CODES AND STANDARDS

Following is a general listing of Codes and Standards to be used in the design of the Plant. Specific applicable codes and standards will be identified in System Design Descriptions/ Technical Specifications as appropriate. The latest editions/ revision of following codes and standards along with addendums/ amendments, if any, shall be followed:

2.1. Earthwork

- a) IS-1498: Classification and identification of soils for General Engineering purposes.
- b) IS-3764: Safety Code for excavation work.
- c) IS-7293: Safety Code for working with construction machinery.
- d) IS-4701: Code of practice for earth work on canals.
- e) IS-9759: Guide lines for dewatering during construction.
- f) IS-10379: Code of practice for field control of moisture and compaction of soils for embankment and sub-grade.

2.2. Concrete

- a) IS-269: Ordinary and low heat Portland cement.
- b) IS-383: Coarse and fine aggregate from natural sources for concrete.
- c) IS-432: Mild Steel and medium tensile steel bars and hard drawn steel wire for concrete reinforcement.
- (Part I & II)
- d) IS-455: Portland Slag Cement.
- e) IS-456: Code of Practice for Plain and reinforced concrete.
- f) IS-457: Code of practice for general construction of plain and reinforced concrete for dams and other massive structures.
- g) IS-460: Test Sieves (all parts).
- h) IS-516: Methods of test for strength of concrete.
- i) IS-1199: Methods of sampling and analysis of concrete.
- j) IS-1566: Hard drawn steel wire fabric for concrete Reinforcement.
- k) IS-1786: High strength deformed steel bars and wires for concrete Reinforcement.
- l) IS-1791: General requirement for batch type concrete mixers.
- m) IS-1834: Hot applied sealing compounds for joints in concrete.
- n) IS-1838: Preformed fillers for expansion joints in concrete pavement and structures.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 5 OF 17

- o) IS-2386: Methods of test for aggregates for concrete (all parts).
(Part I-VIII)
- p) IS-2438: Specification for roller pan mixers.
- q) IS-2502: Code of practice for bending and fixing of bars for concrete Reinforcement.
- r) IS-2505: Concrete vibrators - immersion type.
- s) IS-2506: General requirements for screed board concrete vibrators.
- t) IS-2722: Specification for Portable Swing weigh batchers for concrete (single and double bucket type).
- u) IS-2750: Steel scaffoldings.
- v) IS-2751: Recommended practice for welding of mild steel plain and deformed bars for reinforced construction.
- w) IS-3150: Hexagonal wire netting for general purposes.
- x) IS-3366: Specification for pan vibrators.
- y) IS-3370: Code of practice for concrete structures for storage of liquids (all parts).
(Part I-IV)
- z) IS-3414: Code of practice for design and installation of joints in buildings.
- aa) IS-3558: Code of practice for use of immersion vibrators for consolidating concrete.
- bb) IS-4014: Code of practice for steel tubular scaffolding.
(Part I & II)
- cc) IS-4656: Form vibrators for concrete.
- dd) IS-4925: Concrete batching and mixing plant.
- ee) IS-4948: Welded steel wire fabrics for general use.
- ff) IS-4990: Plywood for concrete shuttering work.
- gg) IS-5256: Code of practice for sealing expansion joints in concrete lining on canals.
- hh) IS-6452: High Alumina Cement for Structural use.
- ii) IS-6461: Glossary of terms relating to cement concrete.
- jj) IS-6494: Code of practice for water proofing of underground reservoir and swimming pools.
- kk) IS-6509: Code of practice for installation of joints in concrete pavements.
- ll) IS-7320: Concrete slump test apparatus.
- mm) IS-7861: Code of practice for extreme weather concreting.
(Part I & II)
- nn) IS-8041: Rapid Hardening Portland Cement.
- oo) IS-8112: High strength ordinary Portland Cement.
- pp) IS-9012: Recommended practice for shotcreting.
- qq) IS-9103: Admixtures for concrete.
- rr) IS-9417: Recommendations for welding cold worked bars for reinforced concrete construction.
- ss) IS-10262: Recommended guidelines for concrete mix design.
- tt) IS-458: Specification for precast concrete pipes.
- uu) IS-3935: Code of practice for composite construction.
- vv) IS-4995: Criteria for design of reinforced concrete bins for storage of granular (all parts) and powdery materials.
- ww) IS-5525: Recommendation for detailing of reinforced concrete works.
- xx) IS-11384: Code of practice for composite construction in structural steel and concrete.
- yy) IS-11682: Criteria for design of RCC staging for overhead water tanks.
- zz) IS:12118: Two parts polysulphide based sealants.
- aaa) IS:12200: Code of practice for provision of water stops at transverse construction joints in masonry and concrete dams.
- bbb) IS:13311: Non-destructive testing of concrete - methods of test.
Part I - Ultrasonic pulse velocity.
Part II - Rebound hammer.
- ccc) IS-13920: Code of practice for ductile detailing of reinforced concrete structures subjected to seismic forces.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 6 OF 17

- ddd) SP-16: Design codes for reinforced concrete to IS:456-1978.
eee) SP-23: Hand book of concrete mixes.
fff) SP-24: Explanatory handbook on Indian standards code for plain and reinforced concrete.
(IS: 456)
ggg) SP-34: Hand book on concrete reinforcement and detailing.
hhh) ACI-318: American Concrete Institute code for structural concrete.
iii) IS-280: Mild steel wire for general engineering purpose.
jjj) IS-10297: Code of practice for design and construction of floors and roofs using precast reinforced/prestressed concrete ribbed or cored slab units.
kkk) IS-10505: Code of practice for construction of floors and roofs using pre-cast reinforced concrete waffle units.
lll) IS-15658: Pre-cast concrete block for paving.

2.3. Foundations

- a) IS-1080: Code of practice for Design and Construction of shallow foundations on soils (other than raft, ring and shell)
b) IS-1904: Code of practice for Design and Construction of foundations in soils: General Requirements
c) IS-2314: Steel sheet piling sections.
d) IS-2911: Code of practice for Design and Construction of Pile foundations (all parts).
e) IS-2950: Code of practice for design and construction of raft foundations.
f) IS-2974: Code of practice for design and construction of machine foundations.
g) IS-4091: Code of practice for Design and Construction of foundations for transmission line towers and poles
h) IS-6403: Code of practice for determination of Bearing capacity of Shallow foundations.
i) IS-8009: Code of practice for calculation of settlement of foundations: (all parts)
j) IS-9556: Code of practice for Design and Construction of diaphragm walls.
k) IS-11089: Code of practice for Design and Construction of ring foundation.
l) IS-12070: Code of practice for design and construction of shallow foundations on rocks.
m) IS-13301: Guidelines for vibration isolation for machine foundation.
n) ISO 10816: Criteria for assessing mechanical vibrations of machines.
o) ISO 1940: Criteria for assessing the st of balance of rotating rigid bodies.
p) DIN: EN13906-1: Helical compression spring made of round wire and rod: calculation and design of compression.
q) DIN: 2096 Helical compression spring out of round wire and rod: Quality requirements for hot formed compression spring.
r) DIN: 4024 Flexible supporting structures for machine with rotating machines.

2.4. Loading

- a) IS-875: Code of practice for Structural safety of buildings - loading standards.
b) IS-1911: Schedule of unit weights of building materials.
c) IRC-6: Standard specifications & Code of practice for road bridges.

2.5. Masonry

- a) IS-712: Building limes.
b) IS-1077: Common Burnt Clay Building Bricks.
c) IS-1127: Recommendations for dimensions and workmanship of natural building stones for masonry work.
d) IS-1528: Methods of sampling and physical tests for refractory materials.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 7 OF 17

- e) IS-1597: Code of practice for construction of stone masonry (all parts).
- f) IS-2212: Code of practice for brickwork.
- g) IS-2116: Sand for masonry mortars
- h) IS-2185: Concrete masonry units. (all parts - Hollow and Solid concrete blocks).
- i) IS-2250: Code of practice for preparation and use of masonry mortars.
- j) IS-2572: Code of practice for construction of hollow concrete block masonry.
- k) IS-2691: Burnt clay facing bricks.
- l) IS-3414: Code of practice for design and installation of joints in buildings.
- m) IS-3495: Methods of tests of burnt clay building bricks.
- n) IS-4441: Code of practice for use of Silicate type chemical resistant mortars.
- o) IS-4860: Acid Resistant Bricks.
- p) IS-1905: Code of practice for structural use of unreinforced masonry.
- q) IS-10440: Code of practice for construction of reinforced brick and reinforced brick concrete floors and roofs.
- r) SP-20: Hand book on masonry design and construction.
- s) IS-1489: Portland-pozzolana cement.
- t) IS-1542: Sand for Plaster.
- u) IS-12269: 53 grade ordinary Portland cement.
- v) IS-12894: Specification for fly ash lime bricks.
- w) IS-13757: Burnt clay fly ash building bricks.

2.6.Doors, Windows and Ventilators

- a) IS-399: Classification of commercial timbers and their zonal distribution.
- b) IS-883: Code of practice for design of structural timber in building.
- c) IS-1003: Timber panelled and glazed shutters (all parts).
- d) IS-1038: Steel doors, windows and ventilators.
- e) IS-1081: Code of practice for fixing and glazing of metal (steel and aluminium) doors, windows and ventilators.
- f) IS-1361: Steel windows for industrial buildings.
- g) IS-2835: Transparent sheet glass for glazing and framing purposes.
- h) IS-1948: Aluminium doors windows and ventilators.
- i) IS-1949: Aluminium windows for industrial building.
- j) IS-2191: Wooden flush door shutters (Cellular and hollow core type).
- k) IS-2202: Wooden flush door shutters (solid core type).
- l) IS-3103: Code of practice for Industrial ventilation.
- m) IS-3548: Code of practice for glazing in buildings.
- n) IS-3614: Fire check doors.
- o) IS-4021: Timber door, windows and ventilator frames.
- p) IS-4351: Steel door frames.
- q) IS-6248: Metal rolling shutters and rolling grills.
- r) IS-208: Door Handles.
- s) IS:281: Mild steel sliding door bolts for use with padlocks.
- t) IS-362: Parliament Hinges.
- u) IS-419: Putty, for use on window frames.
- v) IS-451: Technical supply conditions for wood screws.
- w) IS-733: Wrought aluminium and aluminium alloy bars, rods and sections for general engineering purposes.
- x) IS-1285: Wrought aluminium and aluminium alloy extruded round tube & hollow section (for general engineering purposes).
- y) IS-1341: Steel butt hinges.
- z) IS-1823: Floor door stoppers.
- aa) IS-1868: Anodic coatings on Aluminium and its alloys.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 8 OF 17

- bb) IS-2209: Mortice locks (vertical type)
- cc) IS-2553: Safety glass.
- dd) IS-3564: Door closers (Hydraulically regulated).
- ee) IS-5187: Flush bolts.
- ff) IS-5437: Figured, rolled and wired glass.
- gg) IS-6315: Specification for floor springs (Hydraulically regulated) for heavy doors.
- hh) IS-7196: Hold fast.
- ii) IS-7452: Hot rolled steel sections for doors, windows and ventilators.
- jj) IS-10019: Mild steel stays and fasteners.
- kk) IS-10451: Steel sliding shutters (top hung type)
- ll) IS-12823: Prelaminated particle boards.

2.7.Roof and Flooring

- a) IS-2204: Code of practice for construction of reinforced concrete shell roof.
- b) IS-3201: Criteria for the design and construction of precast concrete trusses.
- c) IS-2210: Criteria for Design of R.C. shell structures and folded plates.
- d) IS-809: Rubber flooring materials for general purposes.
- e) IS-1195: Bitumen mastic for flooring.
- f) IS-1196: Code of practice for laying bitumen mastic flooring.
- g) IS-1198: Code of practice for laying, fixing and maintenance of linoleum floors.
- h) IS-1237: Cement concrete flooring tiles.
- i) IS-1443: Code of practice for laying and finishing of cement concrete flooring tiles.
- j) IS-2114: Code of practice for laying in situ terrazzo floor finish.
- k) IS-2571: Code of practice for laying in situ cement concrete flooring.
- l) IS-5491: Code of practice for laying in situ granolithic concrete floor topping.
- m) IS-5766: Code of practice for laying burnt clay brick flooring.
- n) IS-1197: Code of practice for laying of rubber floors.
- o) IS-2441: Code of practice for fixing ceiling coverings.

2.8.Waterproofing

- a) IS-1322: Bitumen felts for waterproofing and damp proofing.
- b) IS-1346: Code of practice for waterproofing of roofs with bitumen felts.
- c) IS-1609: Code of practice for laying damp proof treatment using bituminous felts.
- d) IS-3036: Code of practice for laying lime concrete for a waterproofed roof finish.
- e) IS-3037: Bitumen mastic for use in waterproofing of roofs.
- f) IS-3067: Code of practice for general design, details and preparatory work for damp proofing and water proofing of buildings.
- g) IS-3384: Bitumen primer for use in water proofing and damp proofing.
- h) IS-4365: Code of practice for application of bitumen mastic for waterproofing of roofs.
- i) IS-5318: Code of practice for laying of flexible PVC sheet and tile flooring.
- j) IS-8042: White Portland cement.
- k) IS-13755: Dust pressed ceramic tiles with water absorption of 3%, E 6% (Group B11a).
- l) IS-13801: Chequered cement concrete tiles.

2.9.Soil Engineering

- a) IS-1498: Classification and identification of soils for general engineering purposes.
- b) IS-1892: Code of practice for sub-surface investigation for foundations.
- c) IS-2131: Method for standard penetration test for soils.
- d) IS-2720: Methods of test for soils (all parts).



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 9 OF 17

2.10. Water Supply, Drainage and Sewerage

- a) IS-404: Lead pipes
- b) IS-458: Concrete pipes
- c) IS-651: Salt glazed stoneware pipes and fittings.
- d) IS-771: Glazed fire-clay sanitary appliances (all parts).
- e) IS-774: Flushing cisterns for water closets and urinals other than plastic cisterns.
- f) IS-783: Code of practice for laying of concrete pipes.
- g) IS-1172: Code of basic requirements for water supply, drainage and sanitation.
- h) IS-1626: Asbestos cement building pipes, gutters and fittings (all parts).
- i) IS-1742: Code of practice for building drainage.
- j) IS-2064: Code of practice for selection, installation and maintenance of sanitary appliances.
- k) IS-2065: Code of practice for water supply in buildings.
- l) IS-2470: Code of practice for installation of septic tanks (all parts).
- m) IS-3114: Code of practice for laying of Cast Iron pipes.
- n) IS-4127: Code of practice for laying of glazed stoneware pipes.
- o) IS-12251: Code of practice for Drainage of Building Basement.
- p) IS-1200: Method of measurement: Laying of water and [Part- XVI] sewer lines including appurtenant items.
- q) IS-1536: Centrifugally cast (spun) iron pressure pipes for water, gas and sewage.
- r) IS-1537: Vertically cast iron pressure pipe for water, gas and sewage.
- s) IS-3486: Cast iron spigot and socket drain pipes.
- t) IS-5329: Code of practice for sanitary pipe work above ground for buildings.
- u) IS-3076: Low density polyethylene pipes for potable water supplies.
- v) IS-1538: Cast iron fittings for pressure pipes for water, gas and sewage.
- w) IS-1230: Cast iron rainwater pipes and fittings.
- x) IS-1729: Sand cast iron spigot and socket soil, waste and ventilating pipes, fittings and accessories.
- y) IS-784: Prestressed concrete pipes.
- z) IS-1726: Cast iron manhole covers and frames.
- aa) IS-5961: Cast iron grating for drainage purposes.
- bb) IS-5219: "P" and "S" traps.
- (Part-I)
- cc) IS-772: General requirements for enamelled cast iron sanitary appliances.
- dd) IS-775: Cast iron brackets and supports for wash basins and sinks.
- ee) IS-777: Glazed earthenware wall tiles.
- ff) IS-2548: Plastic water closet seats and covers (all parts).
- gg) IS-2527: Code of practice for fixing rainwater gutters and downpipes for roof drainage.
- hh) IS-554: Pipe threads where pressure tight joints are made on the threads – dimensions, tolerances and designation.
- ii) IS-778: Copper alloy gate, globe and check valves for water works purposes.
- jj) IS-781: Cast copper alloy screw down bib taps & stop valves for water services.
- kk) IS-782: Caulking lead.
- ll) IS-1703: Copper alloy float valve for water supply fitting.
- mm) IS-2326: Automatic flushing cisterns for urinals.
- nn) IS-2556: Vitreous sanitary appliances (vitreous china).
- oo) IS-3311: Waste plug and its accessories for sinks and wash basins.
- pp) IS-3438: Silvered glass mirrors for general purposes.
- qq) IS-3589: Steel pipe for water and sewage (168.3 to 2540mm outside diameter)
- rr) IS-3989: Centrifugally cast (Spun) iron spigot and socket soil, waste and ventilating pipes, fittings and accessories.
- ss) IS-4111: Code of practice for ancillary structure in sewerage system.
- (Part I to V)



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 10 OF 17

- tt) IS-4733: Methods of sampling and testing sewage effluents.
uu) IS-4764: Tolerance limits for sewage effluents discharged into inland surface waters.
vv) IS-1068: Electroplated coating of nickel plus chromium and copper plus nickel plus chromium.
ww) IS-5382: Rubber sealing rings for gas mains, water mains and sewer
xx) IS-5822: Code of practice for laying of electrically welded steel pipes for water supply.
yy) IS-7740: Code of practice for construction and maintenance of road gullies.
zz) IS-8931: Copper alloy fancy single taps combination tap assembly and stop valves for water services.
aaa) IS-9762: Polyethylene floats for float valves.
bbb) IS-10592: Industrial emergency showers, eye and face fountains and combination units.
ccc) IS-12592: Specification for precast concrete manhole covers and frames.
ddd) IS-12701: Rotational moulded polyethylene water storage tanks.
eee) IS-13983: Stainless steel sinks for domestic purposes.
fff) SP-35: Hand book on water supply and drainage with special emphasis on plumbing.

2.11. Paving and Road works

- a) IS-73: Paving bitumen
b) IS-702: Industrial Bitumen
c) IS-1201: Method of testing tar and bituminous materials. thru' 1220
d) : Practice followed by Indian Road Congress (all parts).

2.12. Earthquake Resistant Design

- a) IS-1893: Criteria for earthquake resistant design of structures.
b) IS-4326: Code of practice for earthquake resistant design and construction of buildings.

2.13. Chimney

- a) IS-4998: Criteria for Design of R.C. Chimneys (all parts).
b) IS-6533: Code of practice for design and construction of steel chimneys
c) ACI-307: Specification for the design and construction of reinforced concrete chimneys
d) BS-4076: Specification for steel chimneys
e) CICIND: Model Code for concrete chimneys / Model code for steel chimneys

2.14. Cooling Tower

- a) BS-4485: Structural design of cooling towers.
(Part 4)

2.15. Structural Steelwork

- a) IS-800: Code of practice for general construction in steel.
b) IS-802: Code of practice for use of structural steel in Overhead Transmission Line
(All Parts).
c) IS-806: Code of practice for use of steel tubes in general building construction.
d) IS-808: Rolled steel beams, channels and angle sections.
e) IS-813: Scheme of symbols for welding.
f) IS-814: Covered electrodes for manual metal arc welding of carbon and carbon manganese steel.
g) IS-816: Code of practice for use of metal arc welding for general construction in mild steel.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 11 OF 17

- h) IS-817: Code of practice for training and testing of metal arc welders.
- i) IS-818: Code of practice for safety and health requirements in electric and gas welding and cutting operation.
- j) IS-819: Code of practice for Resistance spot welding for light assemblies in Mild Steel.
- k) IS-919: Recommendations for limits and fits for engineering.
- l) IS-1024: Code of practice for use of welding in Bridges and Structures subjected to Dynamic loading.
- m) IS-1161: Steel tubes for structural purposes.
- n) IS-1182: Recommended practice for Radiographic Examination of Fusion Welded Butt joints in steel plates.
- o) IS-1200: Method of measurement of steelwork and ironwork.
(Part-VIII)
- p) IS-1239: Mild steel tubes, tubulars and other wrought steel fittings (all parts).
- q) IS-1363: Black hexagonal bolts, nuts and locknuts (Dia. 6 to 39 mm) and black hexagon screws (Dia. 6 to 24 mm). [all parts]
- r) IS-1364: Precision and semi-precision hexagon bolts, screws, nuts and locknuts (Dia. range 6 to 39 mm). [all parts]
- s) IS-1365: Slotted counter sunk head screws (Dia. range 1.6 to 20 mm).
- t) IS-1367: Technical supply conditions for threaded steel fasteners. (Part 1 to 18)
- u) IS-1443: Code of practice for laying and finishing of cement concrete flooring tiles.
- v) IS-1608: Method for tensile testing of steel products.
- w) IS-1730: Dimensions for steel plate, sheet and strip for structural and general engineering purpose.
- x) IS-1731: Dimensions for steel flats for structural and general engineering purposes.
- y) IS-1852: Rolling and cutting tolerances for hot rolled steel products.
- z) IS-1977: Structural steel (Ordinary quality)
- aa) IS-2016: Plain Washers
- bb) IS-2062: Steel for General structural purposes.
- cc) IS-2074: Ready mixed paint, air drying, red oxide zinc-chrome, priming.
- dd) IS-2633: Methods of testing uniformity of coating of zinc coated articles.
- ee) IS-3613: Acceptance tests for wire-flux combinations for submerged-arc welding of structural steels.
- ff) IS-3664: Code of practice for Ultrasonic Pulse echo testing by contact and immersions methods.
- gg) IS-3757: High strength structural bolts.
- hh) IS-4000: High strength bolts in steel structures.
- ii) IS-4759: Hot dip zinc coatings on structural steel and other allied products.
- jj) IS-5334: Code of practice for Magnetic Particle Flaw detection of welds.
- kk) IS-7215: Tolerances for fabrication of steel structures.
- ll) IS-7280: Base-wire electrodes for sub-merged arc welding of structural steels.
- mm) IS-7318: Approval test for welders when welding procedure approval is not required.
(Part-I)
- nn) IS-8500: Structural steel - micro alloyed (medium and high strength qualities).
- oo) IS-9595: Recommendation for metal arc welding of carbon and carbon manganese steels.
- pp) AWS D.1.1: Structural Welding Code.
- qq) IS-8640: Recommendations for dimensional parameters for industrial building.
- rr) IS-9178: Criteria for design of steel bins for storage of bulk material (all parts).
- ss) IS-12843: Tolerances for erection of steel structures.
- tt) IS-1181: Qualifying tests for Metal Arc welders (engaged in welding structures other than pipes).
- uu) IS-2595: Code of practice for Radiographic testing
- vv) IS-2629: Hot dip galvanising of iron and steel
- ww) IS-3502: Steel chequered plate.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 12 OF 17

- xx) IS-3658: Code of practice for liquid penetrant flaw detection.
yy) IS-4353: Sub merged arc welding of mild steel and low alloy steel Recommendation.
zz) IS-5369: General requirements for plain washers and lock washer.
aaa) IS-6623: High strength structural nuts.
bbb) IS-6649: Hardened and tempered washers for high strength structural bolts & nuts.
ccc) IS-6911: Stainless steel plate, sheet and strip.
ddd) IS-7205: Safety code for erection of structural steel.
eee) IS-7307: Approved test for welding procedures
(Part I) Fusion welding of Steel
fff) IS-7310: Approval test for welders working to approval welding procedure.
(Part I) Fusion welding of Steel
ggg) SP-6: IS Handbook for structural engineers.

2.16. Painting

- a) IS-348: Specification for French Polish.
b) IS-427: Specification for Distemper, dry colour as required.
c) IS-428: Specification for Distemper, oil emulsion, colour as required.
d) IS-1477: Code of practice for painting of ferrous metal in buildings.
(Part I & II)
e) IS-2338: Code of practice for finishing of wood and wood based materials.
(Part I & II)
f) IS-2339: Specification for Aluminium Paints for general purposes in dual containers.
g) IS-2395: Code of practice for painting concrete, masonry and plaster surface.
h) IS-2932: Specification for enamel, synthetic, exterior - a) undercoating, b) finishing.
i) IS-2933: Specification for enamel, exterior - a) undercoating, b) finishing.
j) IS-5410: Specification for cement paint.
k) IS-162: Ready mixed paint, brushing fire resisting, silicate type for use on wood, colour as required.
l) IS-1650: Specification for colours for building and decorative materials.
m) IS-2395: Code of practice for painting concrete, masonry and plaster surfaces.
(Part I) Operations and Workmanship.
(Part II) Schedule.
n) IS-2524: Code of practice for painting of nonferrous metals in buildings.
(Part I) Pre-treatment.
(Part II) Painting.
o) IS-15489: Plastic emulsion paint.
p) IS-6278: Code of practice for white washing and Colour washing.
q) IS-10403: Glossary of term related to building finish.
r) IS-12027: Silicone based water repellent.
s) IS-13238: Epoxy based zinc phosphate primer (2 pack).
t) IS-13239: Epoxy surface (2 pack).
u) IS-13467: Chlorinated rubber for paints
v) IS-14209: Epoxy enamel, two component glossy.
w) BS-5493: Code of practice for protective coating of iron and steel structures against corrosion.

2.17. Sheetting

- a) IS-277: Galvanised steel sheets (Plan & corrugated).
b) IS-513: Cold-rolled low carbon steel sheets & strips.
c) IS-730: Hook bolts for corrugated sheet roofing.
d) IS-801: Code of practice for use of cold formed light gauge steel structural members in general building construction.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 13 OF 17

- e) IS-7178: Technical supply condition for tapping screw.
- f) IS-8183: Bonded mineral wool.
- g) IS-8869: Washers for corrugated sheet roofing.
- h) IS-12093: Code of practice for laying and fixing of sloped roof covering using plain and corrugated galvanized steel sheets.
- i) IS-12436: Preformed rigid Polyurethane (PUR) and Polyisocyanurate (PIR) foams for thermal insulation.
- j) IS-12866: Plastic translucent sheets made from thermosetting polyester resin (glass fiber reinforced).
- k) IS-14246: Continuously pre-painted galvanized steel sheets and coils.
- l) BS-5950: Code of practice for design of light gauge profiled steel sheeting (Part VI)

2.18. Plastering

- a) IS-1661: Code of practice for application of cement and cement lime plaster finishes.
- b) IS-2402: Code of practice for external rendered finishes.
- c) IS-2547: Gypsum building plaster.

2.19. Acid / Alkali Resistant Tiling

- a) IS-158: Ready mixed paint, brushing, bituminous, black, lead free, acid, alkali & heat resisting.
- b) IS-412: Expanded metal steel sheets for general purpose.
- c) IS-4443: Code of practice for use of resin type chemical resistant mortars.
- d) IS-4456: Method of Test for chemical resistant tiles.
(Part I & II)
- e) IS-4457: Ceramic unglazed vitreous acid resisting tiles.
- f) IS-4832: Specification for chemical resistant mortars.
(Part I) Silicon Type
(Part II) Resin Type
(Part III) Sulphur Type
- g) IS-9510: Bitumastic acid resisting grade.

2.20. Safety

- a) IS-1641: Code of practice for fire safety of buildings - General principles of fire grading and classification.
- b) IS-1642: Code of practice for fire safety of buildings - Details of construction.
- c) IS-3696: Safety code for scaffolds and ladders.
(Part I & II)
- d) IS-4081: Safety code for blasting and related drilling operations.
- e) IS-4130: Demolition of buildings - code of safety.
- f) IS-5121: Safety code for piling and other deep foundations.
- g) IS-5916: Safety code for construction involving use of hot bituminous materials.
- h) IS-7205: Safety code for erection of structural steel work.
- i) IS-7969: Safety code for handling and storage of building materials.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 14 OF 17

2.21. Architectural Design of Buildings

- a) SP-7: National Building Code of India.
- b) SP-41: Hand book on functional requirements of buildings (other than industrial buildings).
- c) ECBC: Energy Conservation Building Code
- d) GRIHA: Green Rating for Integrated Habitat Assessment.

2.22. Other

- a) Indian Road Congress (IRC) Bridge Codes
- b) Indian Railway Standard Bridge Rules

3. GENERAL

All the quality standards, tolerances, welding standards and other technical requirements shall be strictly adhered to. The Bidder shall fully apprise himself of the prevailing conditions at the proposed site, climatic conditions including monsoon pattern, soil conditions, local conditions and site specific parameters and shall include for all such conditions and contingent measures in the bid, including those which may not have been specifically brought out in the specifications. In case of any conflict between stipulations in various portions of the specification, most stringent stipulation would be applicable for implementation by the Bidder without any extra cost to the Employer.

4. LAYOUT

Before starting the work, the Contractor shall carry out the setting out of foundation and structures and provide levels, with reference to general existing grid and bench mark. **If the Contractor uses the grid, bench mark and reference pillar made by other Contractors, he shall coordinate with the Contractor and shall satisfy himself of the accuracy of the reference marks.** If he is required to set out the foundation afresh, he shall do so independently with reference to the one existing grid and bench

mark which has been followed by other agency at the instruction of the Engineer. In case any discrepancy is found, it shall be immediately brought to the notice of the Engineer for any rectification/modification necessary. No complaint shall be entertained at a later stage. The Contractor shall accurately set out the position for holding down bolts and inserts.

If required, in the opinion of the Engineer, he shall construct and maintain pillars for grid, references and bench marks and maintain them till the completion of the construction. He shall also help the Engineer with instruments, materials and labours for checking the detailed layouts and levels. The Contractor shall be solely responsible for the correctness of the layout and levels, and Engineer's approval shall not be deemed to imply any warranty in carrying out the works correctly. The Tenderer's shall take into account the cost of these in quoting their price.

5. WORKMANSHIP

Workmanship shall be of the best possible quality and all work shall be carried out by skilled workmen except for those which normally require unskilled persons. Welding shall be done by experienced and certified welders in proper sequence using necessary jigs and fixtures. Fabrication shall be done in shops having proper equipment for accurate edge and shaping and dimensioning of anchor bolt assembly, inserts and other misc. items. In addition to the requirement specified above, if the bye laws of the local Govt., Municipal or other authorities require the employment of licensed or registered workmen for various trades, the Contractor shall arrange to have the work done by such registered or



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 15 OF 17

licensed personnel. In case of manufactured materials, the Contractor shall have, with no additional cost to the Owner, the services of the supervisors of the manufacturers to ensure that the work is being done according to the manufacturer's specifications.

6. TEMPORARY WORK

All scaffoldings, staging, temporary bracing and other necessary temporary work required for proper execution of the Contract shall be provided by the Contractor at his own cost and inclusive of all materials, labour, supervision and other facilities.

The layout and details of such Temporary work shall have the prior approval of the Engineer, but the Contractor shall be responsible for proper strength and safety of the same. All Temporary work shall be so constructed as not to interfere with any permanent work or with the work by other agencies. If it is necessary to remove any of the temporary work at any time to facilitate execution of the work or with the work of other agencies, such removal and re erection, if required, shall be carried out by the Contractor at the direction of the Engineer without any delay and any extra cost on this account shall be borne by the Contractor.

7. INTERFACE WITH STRUCTURES UNDER OTHER'S SCOPE

Modification in layout of foundation/structure during detail engineering stage may be necessary to avoid fouling with those under other's scope. Necessary changes on this account will be made without any extra cost to Owner.

8. SEQUENCE OF WORK AND PROGRESS REPORT

The sequence in which the works are to be carried out shall be as approved by the Engineer in accordance with the construction method accepted by the Engineer and to be followed by the Contractor. A programme of work is to be submitted for the Engineer's review and approval and this has to be periodically updated and modified as per actual progress to enable timely completion.

The Contractor shall regularly submit to the Engineer progress reports for periods of working as specified by the Engineer showing up to date progress on all important items of work.

9. CONSTRUCTION METHODOLOGY

Construction and erection activities shall be fully mechanized from the start of the work. All excavation and backfilling work shall be done using excavators, loaders, dumpers, dozers, porcelains, excavator mounted rock breakers, rollers, sprinklers, water tankers, etc. Manual excavation can be done only on isolated places with specific approval of engineer.

Dewatering shall be done using the combination of electrical and standby diesel pumps.

For concreting, weigh batching plants, transit mixers, concrete pumps, hoists, etc. shall be used.

All handling of materials shall be with cranes.

Heavy trailers shall be used for transportation.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 16 OF 17

Mechanized modular units of scaffolding and shuttering shall be used.

Grouting shall be carried out using hydraulically controlled grouting equipment.

All finishing items shall be installed using appropriate modern mechanical tools. Manual punching etc. shall not be permitted.

Heavy duty hoists for lifting of construction materials shall be deployed.

Compressors for cleaning of foundations and other surfaces shall be used.

Field laboratory shall be provided with all modern equipment for survey, testing of soil, aggregates, concrete, welding, etc.

All persons working at site shall be provided with necessary safety equipment and all safety aspects shall be duly considered for each construction/ erection activity. Moreover, only the persons who are trained in the respective trade shall be employed for executing that particular work.



**SPECIFIC TECHNICAL REQUIREMENT
FOR CIVIL, STRUCTURAL &
ARCHITECTURAL WORKS FOR FLUE
GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE FOR 3x660 MW NPGCPL
NABINAGAR STPP FGD.**

SPECIFICATION NO. PE-TS-457-600-001

VOLUME - IIB

SECTION - C

REV.NO. 0 DATE 19/12/2019

SHEET 17 OF 17

PART-II

SPECIFIC TECHNICAL REQUIREMENT

NTPC Limited

(A Government of India Enterprise)



LOT 1A PROJECTS

(PART –A)

SECTION – VI

**TECHNICAL SPECIFICATION
FOR
FLUE GAS DESULPHURISATION (FGD)
SYSTEM PACKAGE**

BIDDING DOCUMENT NO. : CS-0011-109(1A)-2

NTPC Limited

(A Government of India Enterprise)



LOT 1A PROJECTS

(PART –A)

SECTION – VI

TECHNICAL SPECIFICATION FOR FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE

BIDDING DOCUMENT NO. : CS-0011-109(1A)-2

This document is meant for the exclusive purpose of bidding against this specification and shall not be transferred, reproduced or otherwise used for purposes other than that for which it is specifically issued.



FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE

BIDDING DOCUMENT NO. : CS-0011-109(1A)-2

LIST OF LOT 1A PROJECTS

1. PROJECT INFORMATION- KUDGI-I 3X800 MW
2. PROJECT INFORMATION- LARA-I 2X800 MW
3. PROJECT INFORMATION- GADARWARA-I 2X800 MW
4. PROJECT INFORMATION- DARLIPALLI-I 2X800 MW
5. PROJECT INFORMATION- MOUDA-II 2X660 MW
6. PROJECT INFORMATION- SOLAPUR-II 2X660 MW
7. PROJECT INFORMATION- TANDA-II 2X660 MW
8. PROJECT INFORMATION- NABINAGAR-I 3X660 MW
9. PROJECT INFORMATION- MEJA-I 2X660 MW
10. PROJECT INFORMATION- BARH-I 3X660 MW
11. PROJECT INFORMATION- NABINAGAR 4X250 MW

LOT-IA PROJECTS

SECTION - VI

TECHNICAL SPECIFICATION FOR FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE

THE TECHNICAL SPECIFICATION, SECTION - VI COMPRISE OF THE FOLLOWING PARTS

PART – A

SUB-SECTION-I	INTENT OF SPECIFICATION
SUB-SECTION-II	PROJECT INFORMATION
SUB-SECTION-II-A1	PROJECT INFORMATION- KUDGI-I 3X800 MW
SUB-SECTION-II-A2	PROJECT INFORMATION- LARA-I 2X800 MW
SUB-SECTION-II-A3	PROJECT INFORMATION- GADARWARA-I 2X800 MW
SUB-SECTION-II-A4	PROJECT INFORMATION- DARLIPALLI-I 2X800 MW
SUB-SECTION-II-A5	PROJECT INFORMATION- MOUDA-II 2X660 MW
SUB-SECTION-II-A6	PROJECT INFORMATION- SOLAPUR-II 2X660 MW
SUB-SECTION-II-A7	PROJECT INFORMATION- TANDA-II 2X660 MW
SUB-SECTION-II-A8	PROJECT INFORMATION- NABINAGAR-I 3X660 MW
SUB-SECTION-II-A9	PROJECT INFORMATION- MEJA-I 2X660 MW
SUB-SECTION-II-A10	PROJECT INFORMATION- BARH-I 3X660 MW
SUB-SECTION-II-A11	PROJECT INFORMATION- NABINAGAR 4X250 MW
SUB-SECTION-III	SCOPE OF SUPPLY & SERVICES
SUB-SECTION-III-A	MECHANICAL EQUIPMENTS & SYSTEMS
SUB-SECTION-III-A1	FLUE GAS DESULPHURISATION SYSTEM
SUB-SECTION-III-A2	AIR CONDITIONING, VENTILATION SYSTEM & COMPRESSED AIR SYSTEM
SUB-SECTION-III-A3	FIRE FIGHTING SYSTEM
SUB-SECTION-III-A4	EQUIPMENT COOLING WATER SYSTEM
SUB-SECTION-III- A5	LIME STONE & GYPSUM HANDLING SYSTEM
SUB-SECTION-III- A6	ZERO LIQUID DISCHARGE SYSTEM

LOT-IA PROJECTS
FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE

TECHNICAL SPECIFICATION
SECTION-VI
BID DOCUMENT NO.: CS-0011-109(1A)-2

SUB-SECTION-III-B	ELECTRICAL SYSTEM/EQUIPMENT
SUB-SECTION-III-C	CONTROL AND INSTRUMENTATION SYSTEM
SUB-SECTION-III-D	CIVIL WORKS
SUB-SECTION-IV	TERMINAL POINTS & EXCLUSIONS
SUB-SECTION-V	SALIENT DESIGN DATA & SIZING
SUB-SECTION-VI	FUNCTIONAL GUARANTEES & LIQUIDATED DAMAGES
SUB-SECTION-VII	MANDATORY SPARES

PART – B (DETAILED TECHNICAL SPECIFICATION)

SUB-SECTION-I-M (MECHANICAL SYSTEM)

SUB-SECTION-I-M1	FLUE GAS DESULPHURISATION SYSTEM
SUB-SECTION-I-M2	AIR CONDITIONING & VENTILATION SYSTEM
SUB-SECTION-I-M3	COMPRESSED AIR SYSTEM
SUB-SECTION-I-M4	FIRE DETECTION & PROTECTION SYSTEM
SUB-SECTION-I-M5	EQUIPMENT COOLING WATER SYSTEM
SUB-SECTION-I-M6	LIME STONE & GYPSUM HANDLING SYSTEM
SUB-SECTION-I-M7	ZERO LIQUID DISCHARGE SYSTEM
SUB-SECTION-I-M8	PIPING
SUB-SECTION-I-M9	MDL

PART – B (DETAILED TECHNICAL SPECIFICATION)

SUB-SECTION-II-E (ELECTRICAL SYSTEM)

SUB-SECTION-II-E1	GENERAL ELECTRICAL SPECIFICATION
SUB-SECTION-II-E2	MOTORS
SUB-SECTION-II-E3	MEDIUM VOLTAGE BUS DUCTS
SUB-SECTION-II-E4	LT POWER CABLES
SUB-SECTION-II-E5	LT CONTROL CABLES
SUB-SECTION-II-E6	CABLING EARTHING & LIGHTNING PROTECTION
SUB-SECTION-II-E7	HT CABLES

SUB-SECTION-II-E8	ELECTRIC ACTUATORS WITH INTEGRAL STARTERS
SUB-SECTION-II-E9	HT SWTIGCHGEAR
SUB-SECTION-II-E10	LT SWTIGCHGEAR & LT BUSDUCT
SUB-SECTION-II-E11	DIESEL GENERATORS
SUB-SECTION-II-E12	OUTDOOR TRANSFORMERS
SUB-SECTION-II-E13	ELEVATOR ELECTRICAL
SUB-SECTION-II-E14	FIRE PROOF CABLE PENETRATION SEALING SYSTEM
SUB-SECTION-II-E15	LIGHTING
SUB-SECTION-II-E16	BATTERY
SUB-SECTION-II-E17	BATTERY CHARGER

PART – B (DETAILED TECHNICAL SPECIFICATION)

SUB-SECTION-III-C (CONTROL & INSTRUMENTATION SYSTEM)

SUB-SECTION-III-C1	BASIC DESIGN CRITERIA
SUB-SECTION-III-C2	MEASURING INSTRUMENTS (PRIMARY AND SECONDARY)
SUB-SECTION-III-C3	PROCESS CONNECTION AND PIPING
SUB-SECTION-III-C4	INSTRUMENTATION CABLES
SUB-SECTION-III-C5	PLC BASED CONTROL SYSTEM
SUB-SECTION-III-C6	TYPE TEST REQUIREMENTS
SUB-SECTION-III-C7	CONTROL VALVES, ACTUATORS & ACCESSORIES

PART – B (DETAILED TECHNICAL SPECIFICATION)

SUB-SECTION-IV-D (CIVIL WORKS)

SUB-SECTION-IV-D	CIVIL WORKS

PART – B (DETAILED TECHNICAL SPECIFICATION)

SUB-SECTION- V-Q (QUALITY ASSURANCE)

(MECHANICAL)

SUB-SECTION-V-QM1	FLUE GAS DESULPHURISATION SYSTEM
SUB-SECTION-V-QM2	LIME & GYPSUM HANDLING
SUB-SECTION-V-QM3	EQUIPMENT COOLING WATER SYSTEM
SUB-SECTION-V-QM4	AIR CONDITIONING & VENTILATION
SUB-SECTION-V-QM5	ZERO LIQUID DISCHARGE SYSTEM
SUB-SECTION-V-QM6	COMPRESSOR AIR SYSTEM

(ELECTRICAL)

SUB-SECTION-V-QE1	MOTORS
SUB-SECTION-V-QE2	MEDIUM VOLTAGE BUS DUCTS
SUB-SECTION-V-QE3	LT POWER CABLES
SUB-SECTION-V-QE4	CONTROL CABLES
SUB-SECTION-V-QE5	CABLING EARTHING & LIGHTNING PROTECTION
SUB-SECTION-V-QE6	HT CABLES
SUB-SECTION-V-QE7	ELECTRIC ACTUATORS WITH INTEGRAL STARTERS
SUB-SECTION-V-QE8	HT SWITCHGEAR
SUB-SECTION-V-QE9	LT SWITCHGEAR
SUB-SECTION-V-QE10	DIESEL GENERATORS
SUB-SECTION-V-QE11	AUXILIARY TRANSFORMERS
SUB-SECTION-V-QE12	ELEVATOR
SUB-SECTION-V-QE13	VFD MODULE
SUB-SECTION-V-QE14	STATION LIGHTING

(CONTROL & INSTRUMENTATION SYSTEM)

SUB-SECTION-V-QC1	MEASURING INSTRUMENTS
	(PRIMARY & SECONDARY
SUB-SECTION-V-QC2	PROCESS CONNECTION & PIPING
SUB-SECTION-V-QC3	INSTRUMENTATION CABLES
SUB-SECTION-V-QC4	CONTROL DESK PLC PANEL SMOKE DETECTOR
	FIRE ALARM & CONTROL SYSTEM
SUB-SECTION-V-QC5	POWER SUPPLY SYSTEM
SUB-SECTION-V-QC6	CONTROL VALVE ACTUATORS AND ACCESSORIES
SUB-SECTION-V-QC7	ELECTRICAL ACTUATOR WITH INTEGRAL STARTERS

(CIVIL WORKS)

SUB-SECTION-V-QD1

SUB-SECTION- VI

(PRE-COMMISSIONING ACTIVITIES, COMMISSIONING OF FACILITIES AND INITIAL OPERATIONS)

PART - C

GENERAL CONDITIONS OF CONTRACT

PART - D

ERECTION CONDITIONS OF CONTRACTS

PART - E

LIST OF TENDER DRAWINGS

PART - F

ATTACHMENT-12 TO SECTION-VII (TECHNICAL DATA SHEETS)

PART – A

SUB-SECTION-I

INTENT OF SPECIFICATION

CLAUSE NO.	INTENT OF SPECIFICATION 			
1.00.00 1.01.00	INTENT OF SPECIFICATION Scope of the proposal The scope of the proposal for Engineering, Supply, Construction, Erection, Testing & Commissioning works for each project of Flue Gas Desulphurisation (FGD) System Package for Lot 1A Projects shall be on the basis of a single point responsibility, completely covering the following activities and services in respect of all the equipment specified and covered under the specifications and read in conjunction with “Scope of Supply & Services”, Sub-section-III, Part-A, Section – VI of Technical Specification. a) Basic Engineering of the plant including preparation of Plant Definition Manuals for the Project; b) Detailed design of all the equipment and system(s) including civil, structure steel works included in bidder's scope for the Project. c) Providing engineering drawings, equipment sizing & performance data, instruction manuals, as built drawings and other information; d) Compliance with statutory requirements and obtaining clearances from statutory authorities, wherever required; e) Complete manufacturing including shop testing/type testing; f) Complete Civil, Structural and Architectural works, including survey, providing construction offices, field laboratory and construction equipments; g) Packing and transportation from the manufacturer's works to the site including customs clearance & port clearance, port charges, if any. h) Receipt, storage, preservation, handling and conservation of equipment at the site; i) Fabrication, pre-assembly, if any, erection, testing, commissioning and completion of facilities including putting into satisfactory operation all the equipment including successful completion of initial operation; j) Reliability tests, performance and guarantee tests after successful completion of facilities; k) Furnishing of spares on FOR site basis; l) Reconciliation with customs authorities, as required.			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 1 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION	एनटीपीसी NTPC		
1.02.00	m) Satisfactory conclusion of the contract. n) Insurance and other requirements for the complete FGD package in accordance with the provisions of general conditions of contract (Section-IV) of the bidding document. The requirements, conditions, appendices etc. given in Technical Specifications (Section-VI, Parts A, B, C, D, E & F and shall apply to and shall be considered as a part of this volume as completely as if bound here with. The work to be carried out as per the above scope shall be all in accordance with the requirements, conditions, appendices, etc., stated in Section GCC, which shall be considered as a part of the Technical Specification (Section VI) as completely as if bound herewith. The Contractor shall be responsible for providing all material, equipment and service, which are required to fulfill the intent of ensuring operability, maintainability, reliability and complete safety of the complete work covered under this specification, irrespective of whether it has been specifically listed herein or not. It is not the intent to specify completely herein, all aspects of design and construction of equipment, nevertheless, the equipment shall conform in all aspects to high standards of engineering, design and workmanship and shall be capable of performing in continuous commercial operation, in a manner acceptable to the Employer, who will interpret the meaning of the specification, drawings and shall have a right to reject or accept any work or material which in his assessment is not complete to meet the requirements of this specification and/or applicable international standards mentioned elsewhere in the specification. Bidders are requested to carefully examine and understand the specifications and seek clarifications, if required, to ensure that they have understood the specification. Before, submitting their offer, Bidder is required to visit the Project site for assessing the feasibility & layout for FGD System. The Bidder's offer should not carry any sections like clarifications, interpretations and/or assumptions. In the event of conflict between the Technical Specifications and the Conditions of Contract, the requirements as indicated in the technical specification shall govern, unless confirmed otherwise by the Employer in writing before the award of this contract, based on a written request from the Bidder for such a clarification. However, if the Bidder feels that, in his opinion, certain features brought out in his offer are superior to what has been specified, these may be highlighted separately. The Bidder may also make alternate offers provided, such offers are superior in his opinion, to the requirements of these specifications in which case, adequate technical information, operating feed back, etc., are to be enclosed with the offer, to enable the Employer to assess the superiority and reliability of the alternatives offered. In case of each alternative offer, its implications on the performance, guaranteed efficiency, auxiliary power consumption etc., shall be clearly brought out for the Employer to make an overall assessment. In any case, the base offer shall necessarily be in line with the specifications. Under no circumstances the specified equipment and services shall be brought out as an alternative offer.			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 2 OF 19	

CLAUSE NO.	INTENT OF SPECIFICATION	एनटीपीसी NTPC	
	In case, all the above requirements are not complied with, the offer may be considered as incomplete and would become liable for rejection.		
1.03.00	The following are the equipment's covered in this specification:		
1.03.01	Wet limestone based Flue gas desulphurization (FGD) for the project, capable of reducing to the specified limits the emissions of Sulphur Dioxide in flue gas produced by specified coal being fired in boiler, complete with all accessories and auxiliary equipment's as per specification requirements including Booster Fans for each unit, Absorber for each unit with Slurry re-circulation pumps & Oxidation blowers, common Limestone Grinding & slurry preparation system, common Gypsum dewatering system, Limestone handling and storage system, Gypsum handling and storage system.		
1.03.02	~~One (1) number of elevator for each absorber and One (1) numbers of elevator for Limestone Grinding System building.~~		
1.03.03	Buildings for Slurry re-circulation pumps/Oxidation blowers, Limestone Grinding System, Gypsum dewatering system & FGD control Room.		
1.03.04	~~All motors, HT & LT Switchgears, DC System, Transformers, Electrical Actuators, HT & LT power & control cables, DG set (if applicable), cabling, lighting etc.~~		
1.03.05	~~ZERO LIQUID DISCHARGE (ZLD) SYSTEM for FGD waste water for Barh-I (3X660 MW) & Nabinagar (4x250 MW).~~		
1.03.06	Low Height Wet Chimney(s) for the project.		
1.03.07	~~Associated Control & Instrumentation (C&I) equipments.~~		
1.03.08	Associated Civil, Structural and Architectural works including foundation as specified in Technical Specification.		
1.04.00	Wherever a material or article is specified or described by the name of a particular brand, manufacturer or vendor, the specific items mentioned shall be understood to be descriptive only and not restrictive. Such description indicates the equipment type, function and quality desired. Other manufacturer's products may be considered provided sufficient information so as to enable the Employer to determine that the products proposed are equivalent to those named.		
2.00.00	Additional Requirements (a) Before submitting his bid, the Bidder should inspect and examine the site and its surroundings and should satisfy himself as to the nature of the ground and subsoil, the quantities and nature of work, materials necessary for completion of the work and their availability, means of access to site and in general shall himself obtain all necessary information as to risks, contingencies and other		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 3 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION 		
3.00.00	circumstances which may influence or affect his offer. No consequent extra claims on any misunderstanding or otherwise shall be allowed by the Employer. (b) Bidder shall take all necessary precautions to protect all the existing equipment, structures, facilities and buildings etc. from damage. In case any damage occurs due to the activities of the contractor on account of negligence, ignorance, accidental or any other reason whatsoever, the damage shall be immediately made good by the contractor at his own cost to the satisfaction of the Employer. The contractor shall also take all necessary safety measures with specific reference to excavation in rock, at his own cost, to avoid any harm or injury to his workers and staff from the equipment and facilities of the power plant. (c) For his site office and covered store buildings, the contractor shall adopt pre-engineered / pre-fabricated constructions made of steel with single / double skin, insulated or uninsulated roof and wall coverings (fabricated out of permanently color coated metal sheets). Alternatively, contractor can adopt readymade 'Porta cabin' or similar construction. Contractor shall ensure that all such constructions are well engineered, neatly constructed and overall present a pleasing look. (d) In line with Gazette Notification on Ash Utilization issued by MOEF and its amendment thereafter, contractor shall use ash and ash based products in works as specified in these specifications, drawings and as per instructions of the Engineer. He shall also use ash and ash based products in construction of his offices, stores, staff quarters and labour huts etc. He shall furnish a compliance report along with all details of use of ash and ash based products along with each bill. (e) Contractor shall establish/set up at site suitable repair facilities for construction plant, equipment and machinery (like piling rigs, cranes batching plant, dewatering pumps etc.) In case of piling rigs, cranes, batching plant etc. he will also make arrangements / tie up with equipment manufacturers / suppliers for periodic overhaul/maintenance and for major breakdown, if any. He shall also keep adequate stock of spares at site for various plant, equipment and machinery to meet day to day requirements as recommended by the equipment manufacturer/suppliers or as instructed by the Engineer. Contractor shall deploy dedicated qualified, full time mechanical/electrical foreman/supervisors for manning the repair facilities as specified above.		
	APPLICABLE DRAWINGS The drawings listed below and forming part of the specification (Refer Part-E) shall supplement the requirements specified herein. The scope and terminal points of the equipment to be furnished under this steam generator package shall be as identified in these drawings and read in conjunction with text of the specification:		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 4 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION				एनडीपीसी NTPC																																													
	(A) SCHEMES <table><thead><tr><th>Sl. No</th><th>Drawings Title</th><th>Drawings No.</th><th>Rev. No.</th><th>No. of Sheets</th></tr></thead><tbody><tr><td>1)</td><td>Scheme of Absorber system</td><td>0011-109-POM-A-001</td><td>A</td><td>2</td></tr><tr><td>2)</td><td>Scheme of Limestone Milling system</td><td>0011-109-POM-A-002</td><td>A</td><td>1</td></tr><tr><td>3)</td><td>Scheme of Gypsum De-watering system</td><td>0011-109-POM-A-003</td><td>A</td><td>1</td></tr><tr><td>4)</td><td>P&ID Diagram for ECW System of FGD</td><td>0011-109-POM-A-004</td><td>A</td><td>1</td></tr><tr><td>5)</td><td>Process Flow Diagram for FGD Waste water treatment (FGD WWT) for ZLD</td><td>0011-109-POM-A-005</td><td>A</td><td>3</td></tr></tbody></table>					Sl. No	Drawings Title	Drawings No.	Rev. No.	No. of Sheets	1)	Scheme of Absorber system	0011-109-POM-A-001	A	2	2)	Scheme of Limestone Milling system	0011-109-POM-A-002	A	1	3)	Scheme of Gypsum De-watering system	0011-109-POM-A-003	A	1	4)	P&ID Diagram for ECW System of FGD	0011-109-POM-A-004	A	1	5)	Process Flow Diagram for FGD Waste water treatment (FGD WWT) for ZLD	0011-109-POM-A-005	A	3															
	Sl. No	Drawings Title	Drawings No.	Rev. No.	No. of Sheets																																													
	1)	Scheme of Absorber system	0011-109-POM-A-001	A	2																																													
	2)	Scheme of Limestone Milling system	0011-109-POM-A-002	A	1																																													
	3)	Scheme of Gypsum De-watering system	0011-109-POM-A-003	A	1																																													
	4)	P&ID Diagram for ECW System of FGD	0011-109-POM-A-004	A	1																																													
	5)	Process Flow Diagram for FGD Waste water treatment (FGD WWT) for ZLD	0011-109-POM-A-005	A	3																																													
	(B) CONTROL & INSTRUMENTATION <table><thead><tr><th>Sl. No.</th><th>Drawings Title</th><th>Drawings No.</th><th colspan="2">No. of Sheets</th></tr></thead><tbody><tr><td>1.</td><td>Standard configuration diagram for PLC</td><td>0000-151-POI-A-013</td><td colspan="2">1</td></tr><tr><td>2.</td><td>G.A. of Junction Box</td><td>0000-999-POI-A-017</td><td colspan="2">1</td></tr><tr><td>3.</td><td>Instrumentation cabling diagram grounding scheme for cabinets/panels/Power Supply</td><td>0000-999-POI-A-019A</td><td colspan="2">2</td></tr><tr><td>4.</td><td>Scheme of 24V DC Power supply system</td><td>0000-999-POI-A-019B</td><td colspan="2">1</td></tr><tr><td>5.</td><td>Scheme for Uninterruptible Power Supply System</td><td>0000-999-POI-A-019C</td><td colspan="2">1</td></tr><tr><td>6.</td><td>Instrumentation/control/power supply cabling diagram</td><td>0000-101/102-POI-A-021</td><td colspan="2">3</td></tr><tr><td>7.</td><td>Instrument Source Connection details</td><td>0000-999-POI-A-035</td><td colspan="2">14</td></tr><tr><td>8.</td><td>Typical GA of Local Instrument</td><td>0000-999-POI-A-036</td><td colspan="2">1</td></tr></tbody></table>					Sl. No.	Drawings Title	Drawings No.	No. of Sheets		1.	Standard configuration diagram for PLC	0000-151-POI-A-013	1		2.	G.A. of Junction Box	0000-999-POI-A-017	1		3.	Instrumentation cabling diagram grounding scheme for cabinets/panels/Power Supply	0000-999-POI-A-019A	2		4.	Scheme of 24V DC Power supply system	0000-999-POI-A-019B	1		5.	Scheme for Uninterruptible Power Supply System	0000-999-POI-A-019C	1		6.	Instrumentation/control/power supply cabling diagram	0000-101/102-POI-A-021	3		7.	Instrument Source Connection details	0000-999-POI-A-035	14		8.	Typical GA of Local Instrument	0000-999-POI-A-036	1	
	Sl. No.	Drawings Title	Drawings No.	No. of Sheets																																														
	1.	Standard configuration diagram for PLC	0000-151-POI-A-013	1																																														
	2.	G.A. of Junction Box	0000-999-POI-A-017	1																																														
	3.	Instrumentation cabling diagram grounding scheme for cabinets/panels/Power Supply	0000-999-POI-A-019A	2																																														
	4.	Scheme of 24V DC Power supply system	0000-999-POI-A-019B	1																																														
	5.	Scheme for Uninterruptible Power Supply System	0000-999-POI-A-019C	1																																														
	6.	Instrumentation/control/power supply cabling diagram	0000-101/102-POI-A-021	3																																														
	7.	Instrument Source Connection details	0000-999-POI-A-035	14																																														
	8.	Typical GA of Local Instrument	0000-999-POI-A-036	1																																														
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2		SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 5 OF 19																																													

CLAUSE NO.	INTENT OF SPECIFICATION			
	Sl. No. Drawings Title Drawings No. No. of Sheets Enclosure, purging scheme, DP transmitter 9. Interfacing of actuators 10. Interfacing of field instruments/Electrical interface/PLC Interface (C) ELECTRICAL (1) Electrical single line diagram for FGD Package : Drg No. 0011-109-POE-J-001/A-E Note : All the above drawings are indicative of Employer's requirements to enable the Bidder to make a suitable offer. All variations/alternations shall be clearly brought out in the technical deviation schedule with implications, if any. Such variations may be acceptable, after assessment of its implication and shall be subjected to the Employer's approval. However, the flexibility of operation and maintenance desired by the schemes and layouts shall be binding. Electrical drawings (except Electrical single line diagram) are attached with respective Electrical Chapters in Part b, Section VI.			
4.00.00	QUALIFYING REQUIREMENTS FOR EQUIPMENTS/SYSTEMS			
4.01.00	Provenness criteria for critical equipment, auxiliaries, systems and bought out items: The Bidder / Bidder's sub-vendor(s) is required to meet the provenness criteria and/or qualification requirement for critical equipment, auxiliaries, system and bought out items as per criteria stipulated below:			
4.01.01	Booster Fans, Slurry Recirculation Pumps, Oxidation Blowers, Wet Limestone Grinding Mills, Slurry Pumps, Agitators & Vacuum Belt Filters for the Wet Limestone based Flue Gas Desulphurisation (FGD) System offered by the Bidder shall be only from such manufacturer(s) who has previously designed (either by itself or under collaboration / licensing agreement), manufactured / got manufactured the respective equipment(s) of the type, application and minimum equipment rating as stipulated below such that the respective equipment(s) should have been in successful operation in at least one (1) plant for a period not less than one(1) year reckoned as on the date of consideration for approval but not later than six months to award date of contract to the Main bidder:			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 6 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION 																																											
	Type and Rating for Qualification <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Sl. No.</th><th style="width: 20%;">Name of Equipment</th><th style="width: 20%;">Type of Equipment</th><th style="width: 20%;">Application</th><th style="width: 30%;">Equipment Rating</th></tr> </thead> <tbody> <tr> <td>(a)</td><td>Booster Fans</td><td>Axial type with variable pitch control</td><td>Coal fired power plant</td><td>80% of the flow & 100% of the head of the offered Booster Fan with Fan Speed 900 rpm (maximum)</td></tr> <tr> <td>(b)</td><td>Slurry Recirculation Pumps</td><td>Centrifugal type</td><td>Wet Limestone based FGD application in Coal fired power plant</td><td>80% of the flow & 100% of the head of the offered Slurry Recirculation Pump</td></tr> <tr> <td>(c)</td><td>Oxidation Blowers</td><td>Centrifugal/ positive displacement type blower</td><td>Wet Limestone based FGD application in Coal fired power plant</td><td>80% of the flow & 100% of the head of the offered Oxidation Blower</td></tr> <tr> <td>(d)</td><td>Wet limestone Grinding mills</td><td>Horizontal Wet Ball mill</td><td>Wet Limestone based FGD application in Coal fired power plant</td><td>80% of the offered Ball mill capacity with pulverizing fineness not less than 90% thru 325 mesh</td></tr> <tr> <td>(e)</td><td>Slurry Pumps</td><td>Centrifugal type</td><td>Wet Limestone based FGD application or ash slurry application in Coal fired power plant</td><td>80% of the flow & 100% of the head of the offered Slurry Pump(s)</td></tr> <tr> <td>(f)</td><td>Agitators</td><td>Vertical/Horizontal</td><td>Wet Limestone based FGD application in Coal fired power plant</td><td>Agitator rating not less than that supplied for 500 MW or higher size unit for similar application</td></tr> <tr> <td>(g)</td><td>Vacuum Belt filters</td><td>Belt type</td><td>Wet Limestone based FGD application in Coal fired power plant</td><td>80% of the offered Vacuum Belt filter capacity</td></tr> </tbody> </table>				Sl. No.	Name of Equipment	Type of Equipment	Application	Equipment Rating	(a)	Booster Fans	Axial type with variable pitch control	Coal fired power plant	80% of the flow & 100% of the head of the offered Booster Fan with Fan Speed 900 rpm (maximum)	(b)	Slurry Recirculation Pumps	Centrifugal type	Wet Limestone based FGD application in Coal fired power plant	80% of the flow & 100% of the head of the offered Slurry Recirculation Pump	(c)	Oxidation Blowers	Centrifugal/ positive displacement type blower	Wet Limestone based FGD application in Coal fired power plant	80% of the flow & 100% of the head of the offered Oxidation Blower	(d)	Wet limestone Grinding mills	Horizontal Wet Ball mill	Wet Limestone based FGD application in Coal fired power plant	80% of the offered Ball mill capacity with pulverizing fineness not less than 90% thru 325 mesh	(e)	Slurry Pumps	Centrifugal type	Wet Limestone based FGD application or ash slurry application in Coal fired power plant	80% of the flow & 100% of the head of the offered Slurry Pump(s)	(f)	Agitators	Vertical/Horizontal	Wet Limestone based FGD application in Coal fired power plant	Agitator rating not less than that supplied for 500 MW or higher size unit for similar application	(g)	Vacuum Belt filters	Belt type	Wet Limestone based FGD application in Coal fired power plant	80% of the offered Vacuum Belt filter capacity
Sl. No.	Name of Equipment	Type of Equipment	Application	Equipment Rating																																								
(a)	Booster Fans	Axial type with variable pitch control	Coal fired power plant	80% of the flow & 100% of the head of the offered Booster Fan with Fan Speed 900 rpm (maximum)																																								
(b)	Slurry Recirculation Pumps	Centrifugal type	Wet Limestone based FGD application in Coal fired power plant	80% of the flow & 100% of the head of the offered Slurry Recirculation Pump																																								
(c)	Oxidation Blowers	Centrifugal/ positive displacement type blower	Wet Limestone based FGD application in Coal fired power plant	80% of the flow & 100% of the head of the offered Oxidation Blower																																								
(d)	Wet limestone Grinding mills	Horizontal Wet Ball mill	Wet Limestone based FGD application in Coal fired power plant	80% of the offered Ball mill capacity with pulverizing fineness not less than 90% thru 325 mesh																																								
(e)	Slurry Pumps	Centrifugal type	Wet Limestone based FGD application or ash slurry application in Coal fired power plant	80% of the flow & 100% of the head of the offered Slurry Pump(s)																																								
(f)	Agitators	Vertical/Horizontal	Wet Limestone based FGD application in Coal fired power plant	Agitator rating not less than that supplied for 500 MW or higher size unit for similar application																																								
(g)	Vacuum Belt filters	Belt type	Wet Limestone based FGD application in Coal fired power plant	80% of the offered Vacuum Belt filter capacity																																								
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 7 OF 19																																								

CLAUSE NO.	INTENT OF SPECIFICATION	एनटीपीसी NTPC		
	Bidder shall offer and supply only the type of the above equipment(s) for which he himself or the manufacturer proposed by the bidder for the above equipment(s) is qualified. The provenness criteria for equipment (Booster Fans) stipulated at Sl. No. 4.01.01 (a) above shall also be considered acceptable provided the rating parameters (i.e., flow, head and rated rpm) is covered within the operating regime of the respective fan performance curve of the reference plant equipment.			
4.01.02	In case the Bidder or the proposed sub-vendor is not manufacturer of proven Booster Fans as per clause 4.01.01 (a) above but is a manufacturer of such equipment for units of at least 500 MW rating, the Bidder or the proposed sub vendor can manufacture such equipment for 660 MW units also, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such equipment in India with such manufacturer who meet the requirements stipulated at clause 4.01.01 (a) above for the Booster Fans.			
4.01.03	A JV / Subsidiary Company formed for manufacturing and supply of equipment(s) as listed at clause no. 4.01.01 above in India, can also manufacture such equipment(s), provided that it has a valid collaboration or licensing agreement for design, engineering, manufacturing of such equipment(s) in India with a qualified equipment manufacturer who meets the requirements stipulated at clause 4.01.01 above (or the technology provider of the qualified equipment manufacturer) for the respective equipment(s). Before taking up the manufacturing of such equipment(s), the bidder/ his sub-vendor(s) must create /have created manufacturing facilities at his works as per collaborator's/licenser's design, manufacturing and quality control system for such equipment(s). Further, in such a case, such qualified equipment manufacturers should have, directly or indirectly through its holding company/ subsidiary company, at least 26% equity participation in the Indian Joint Venture Company/ Subsidiary Company, which shall be maintained for a lock-in period of seven (7) years from the date of incorporation of such Joint Venture/ Subsidiary or upto the end of defect liability period of the contract, whichever is later.			
4.01.04	In case the Bidder or the proposed sub-vendor is not manufacturer of proven Oxidation Blowers as per clause 4.01.01 (c) above but is a manufacturer of Blowers/compressors for minimum 50 NM³/min capacity, the Bidder or the proposed sub-vendor can also manufacture Oxidation Blowers, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such Oxidation Blowers in India with such manufacturer who meet the requirements stipulated at clause 4.01.01 (c) above for the Oxidation Blowers. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipments.			
4.01.05	(i) In case the Bidder or the proposed sub-vendor is not manufacturer of proven Wet limestone Grinding mills as per clause 4.01.01 (d) above but is a manufacturer			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 8 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION 		
4.01.06	of dry Grinding mills for power or cement industry of minimum 20 T/h capacity, the Bidder or the proposed sub-vendor can also manufacture Wet limestone Grinding mills, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such Wet limestone Grinding mills in India with such manufacturer who meet the requirements stipulated at clause 4.01.01 (d) above for the Wet limestone Grinding mills. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipments. In addition, the Bidder along with the qualified equipment manufacturer shall furnish DJU in which executant of the DJU shall be jointly and severally liable for the successful performance of the equipment as per the format enclosed in the bidding document. The DJU shall be submitted prior to the placement of order on the approved sub-vendor for Wet limestone Grinding mills. In case of award, each executant of the DJU except the Bidder shall be required to furnish an on demand bank guarantee for INR 10 Million (Indian Rupees Ten Million only) for each project. OR (ii) In case, the bidder or proposed sub vendor is not a manufacturer of proven Wet Limestone Grinding Mills as per clause 4.01.01 (d) above, but have designed, manufactured & supplied dry Grinding Ball Tube mills for at least 500 MW pulverized coal fired power plant, the Bidder or the proposed sub-vendor can also manufacture Wet limestone Grinding Mills provided it has a licensing agreement with a Wet limestone Grinding mills manufacturer who meet the requirements stipulated at clause 4.01.01 (d) above for the Wet limestone Grinding mills and provides extended warranty of three (3) years for the Wet Limestone Grinding Mills. In such a case Bidder shall provide an additional on demand bank guarantee for INR 10 Million (Indian Rupees Ten Million only) for each project.		
	In case the Bidder or the proposed sub-vendor is not manufacturer of proven Agitators as per clause 4.01.01 (f) above but is a manufacturer of Agitators for similar process/duty application in petrochemical or metals and mining industry, the Bidder or the proposed sub-vendor can also manufacture Agitators, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such Agitators in India with such manufacturer who meet the requirements stipulated at clause 4.01.01 (f) above for the Agitators. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipments.		
	In case the Bidder or the proposed sub-vendor is a manufacturer of Slurry Pumps who meets the requirements stipulated at clause 4.01.01 (e) above, the Bidder or the proposed sub-vendor can also manufacture Slurry Recirculation Pumps,		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION PAGE 9 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION			
	provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such equipment in India with such manufacturer who meet the requirements stipulated at clause 4.01.01 (e) above for the Slurry Recirculation Pumps. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipment.			
4.01.08	Before taking up the manufacturing of such equipment(s) as per clause 4.01.02, 4.01.03, 4.01.04, 4.01.05(i), 4.01.06 & 4.01.07 above, the Bidder / its sub vendor(s) must create (or should have created) manufacturing and testing facilities at its works as per Collaborator / licensor's design, manufacturing and quality control system for such equipments duly certified by the Collaborator / licensor. Further, the Collaborator / Licensor shall provide (or should have provided) all design, design calculation, manufacturing drawings and must provide (or should have provided) technical and quality surveillance assistance and supervision during manufacturing, erection, testing, commissioning of equipments.			
4.01.09	Bidder shall offer and supply only the type of the above equipment(s) for which it, itself or the manufacturer / Collaborator(s) / Licensor(s) proposed by the Bidder for the above equipment(s) is qualified.			
4.01.10	The Employer reserves the right to fully satisfy himself regarding capability and capacity of Bidder / its sub-vendor(s) and the proposed arrangement and may prescribe additional requirement before allowing manufacture of the equipment listed above for this contract.			
	Note to clause 4.01.01 (1) Whenever the term 'coal fired' is appearing above, "Coal" shall be deemed to also include bituminous coal/brown coal/Anthracite Coal/lignite.			
4.02.00	Sub QR for Civil Works:			
4.02.01	Bidder or its agency should have in past executed civil and structural works for 500 MW or higher capacity coal based/Lignite based power plant including earthwork in filling involving mechanical compaction and cutting in hard rock, foundations, Bulk material handling plant involving underground storage hopper and underground tunnels.			
4.02.02	Bidder can engage more than one agency, in case the Bidder itself is not able to meet the requirement at 4.02.01. The agency being engaged for a particular work should have in the past executed such works of 500 MW or higher capacity plant.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 10 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION	एनडीपीसी NTPC		
4.02.03	For Chimney, Bidder or its agency should have in the past built at least one (1) reinforced concrete chimney of minimum 100m height.			
4.02.04	In case Bidder or its agency do not meet the requirements at 4.02.01 and the Bidder proposes to engage agency (ies) for civil & structural works on work volume basis (except for Chimney), Bidder or its agency (ies) should have executed such works in the past and the annual rate of execution in the reference works should not be less than eighty percent (80%) of the asking rate of such works, (structural steel fabrication & erection, RCC, earthwork in filling involving mechanical compaction and cutting in hard rock, RCC in underground storage hopper and underground tunnels) for which it is being engaged.			
4.02.05	Successful Bidder shall finalize the agency (ies) for each work in consultation with Engineer-in-charge at site before engaging them. Design agency for Civil & Steel Structural Works: Bidder or its agency (ies) should have carried out the design and detailed engineering of following works: (i) Civil & Structural works associated with at least one bulk material handling plant for 500 MW or higher capacity coal based/Lignite based power plant. (ii) For Chimney, Bidder or its design agency (ies) should have carried out design & detailed engineering of at least one reinforced concrete chimney with steel flues, of minimum 100m height. (iii) Machine foundations such as Mill foundations/ Block foundations.			
4.02.06	Bidder can engage more than one agency (of repute), in case the Bidder itself is not able to meet the requirement at 4.02.05. The design agency (ies) proposed by the Bidder shall be subject to Employer's approval.			
~~4.03.00~~	~~PROVENNESS CRITERIA FOR ELECTRICAL EQUIPMENTS~~			
~~4.03.01~~	~~HT MOTORS~~			
4.03.01.01	~~BOOSTER FAN MOTOR~~ The offered Squirrel cage Induction motor shall be from such a Manufacturer who has manufactured and supplied motor of 4MW or above rating, which should have been in successful operation for at least one (1) plant for a period not less than one (1) year reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 11 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION	एनटीपीसी NTPC		
~~4.03.02~~	~~LT SWITCHGEAR~~			
~~4.03.02.01~~	~~ROUTE 1~~			
4.03.02.01	(i) Bidder/ Sub Vendor should have manufactured and supplied at least a total of four hundred & fifty (450) nos. draw out type Air Circuit Breaker Panels and / or draw out type Motor Control Centre Panels with fault rating of at least 45kA for 1 second and 105kA peak under a single order and these panels should have been in successful operation for a period of not less than two (2) years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
4.03.02.01	(ii) Bidder/ Sub Vendor should have manufactured and supplied at least one hundred & fifty (150) nos. of Air Circuit Breakers having fault rating of at least 105kA MAKING and 45kA BREAKING, and their associated draw out type Air circuit breaker panels having fault rating of at least 45kA for 1 Second and 105kA peak, which should have been in successful operation for a period of not less than two (2) years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
~~4.03.02.02~~	~~ROUTE 2~~			
4.03.02.02	(i) Bidder/Sub-vendor should have manufactured and supplied at least a total of two hundred & twenty five (225) nos. draw out type Air Circuit Breaker Panels and / or draw out type Motor Control Centre Panels with fault rating of at least 45kA for 1 second and 105kA peak under a single order and these panels should have been in successful operation for a period of not less than two (2) years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
4.03.02.02	(ii) Bidder/Sub-vendor should have manufactured and supplied at least seventy five (75) nos. of draw out type Air Circuit Breaker panels having fault rating of at least 45kA for 1 second and 105kA peak, which should have been in successful operation for a period of not less than two (2) years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
4.03.02.02	(iii) Bidder/Sub-vendor shall Associate/Collaborate with a manufacturer who meets the requirements stipulated in Route 1. In such a case, Bidder/Sub-vendor should furnish a Deed of Joint Undertaking executed by Bidder/Sub-vendor and its Associate/Collaborator as per the format enclosed in the bidding document in which the Bidder/Sub-vendor and its Associate/Collaborator are jointly and severally liable to the Employer for successful performance of the LT Switchgears under this package. This Deed of Joint Undertaking should be submitted prior to the placement of order on approved Sub Vendor. In case of award, the Associate or Collaborator of the Bidder / Sub Vendor (as applicable) will be required to			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 12 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION		
4.03.03 4.03.03.01 4.03.03.02 4.03.03.03 4.03.03.04 4.03.03.05	furnish an on-demand Bank Guarantee for INR 1 Million (Indian Rupees One Million only) per project. Note: Each Single Front Panel shall be counted as one (1) Panel, Double Front Panel as one (1) Panel and Air Circuit Breaker Panel as one (1) Panel. 11 KV / 3.3 KV SWITCHGEARS Route 1 The Bidder/ Sub Vendor should have manufactured and supplied on an average one hundred (100) numbers of 11kV and /or 6.6kV Switchgear panels per annum during the last three years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder. The Bidder/ Sub Vendor should have designed, manufactured and supplied at least one hundred (100) numbers of 11kV and /or 6.6kV Switchgear panels complete in all respects with fault rating of at least 40kA for one (1) second and 100kA (peak), which should have been in successful operation for a period of at least two (2) years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder. The Bidder/ Sub Vendor should have manufactured and supplied at least one hundred (100) numbers of Vacuum Circuit Breakers for 11kV and /or 6.6kV panels with a rating of 40kA rms BREAKING, 100kA peak MAKING and 40kA withstand for one (1) second, which should have been in successful operation in 6.6kV or higher voltage application for a period of at least two (2) years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder. Route 2 Bidder/ Sub Vendor based on technological support of its Associate or Collaborator, can also participate provided The Bidder/ Sub Vendor should have manufactured and supplied on an average one hundred (100) numbers of 11kV and /or 6.6kV Switchgear panels per annum during the last three years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder. The Bidder/ Sub Vendor should have manufactured and supplied at least one hundred (100) numbers of 11kV and /or 6.6kV Switchgear panels complete in all respects with fault rating of at least 40kA for one (1) second and 100kA (peak). The Bidder/ Sub Vendor should have type tested the offered type of panels as specified.		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 13 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION	एनटीपीसी NTPC		
4.03.03.06	The Bidder/ Sub Vendor should have manufactured and supplied at least one hundred (100) numbers of Vacuum Circuit Breakers for 11kV and /or 6.6kV panels with a rating of 40kA rms BREAKING, 100kA peak MAKING and 40kA withstand for one (1) second, reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
4.03.03.07	Bidder's/ Sub Vendor's Associate or Collaborator meets the qualifying requirement stipulated at 4.03.03.02 & 4.03.03.03 stipulated under Route 1.			
4.03.03.08	Bidder/ Sub Vendor furnishes a Deed of Joint Undertaking jointly executed by it and its Associate/ Collaborator as per format enclosed in the bidding document in which the Bidder/ Sub Vendor and its Associate/ Collaborator are jointly and severally liable to the Employer for successful performance of the MV Switchgears. This Deed of Joint Undertaking should be submitted prior to the placement of order on approved Sub Vendor. In case of award, the Associate or Collaborator of the Bidder / Sub Vendor (as applicable) will be required to furnish an on-demand Bank Guarantee for INR 1 Million (Indian Rupees One Million only) per project. Note: Equipment designed by the Bidder itself or through its Collaborator/Associate for reference plant, shall also be considered meeting the requirement of design.			
4.03.04	NUMERICAL RELAYS & NETWORKING			
4.03.04.01	Numerical Relays shall be offered from a Manufacturer who has manufactured and supplied and successfully configured at least 100 No's of Numerical Relays with IEC 61850 used for application in Feeder Protections/Transformer Protections/Motor Protections. These relays should have been in successful operation for at least one (1) year reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
4.03.04.02	The Numerical Relay Network system shall be offered from an Integrator /Manufacturer who has designed and successfully done FAT for a network on IEC 61850 with at least 100 no's of Communicable Numerical Relays reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
4.03.05	AUXILIARY OIL FILLED TRANSFORMERS			
4.03.05.01	The Bidder/ Sub-Vendor should have manufactured & supplied at least two numbers (one each at two different installations) of 16 MVA, 11KV or higher rating oil filled transformers which should have been in successful operation for a period of at least two (2) years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 14 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION	
	And 4.03.05.02 Bidder/ Sub-Vendor should have his own facilities for conducting all routine and type tests as per IS: 2026 (except short circuit test). And 4.03.05.03 16 MVA, 11 KV Class or higher rated oil filled transformer manufactured by Bidder/ Sub-Vendor should have been successfully short circuit tested. Note: i) Two different installations mean two different project sites or two different contracts. ii) Equipment designed by the Bidder/Sub-vendor by itself or through its Collaborator/Associate for reference plant, shall also be considered meeting the requirement of design.	
4.04.00	FGD WASTE WATER TREATMENT SYSTEM FOR ZERO LIQUID DISCHARGE (ZLD)	
4.04.01	Route-1	
4.04.01.01	Bidder/Bidder's Sub vendor should have designed, supplied, erected/supervised erection and commissioned/supervised commissioning at least one (1) number of FGD Waste Water Treatment System (essentially comprising of Evaporator (Brine Concentrator) and/or Crystalliser, Vapour Compressor) operating in Coal fired unit(s) of power plant, having inlet feed as FGD waste water of TDS not less than 30,000 ppm and treatment capacity of not less than 10 m ³ /hr. The above FGD Waste Water Treatment System should have been in successful operation for a period not less than one (1) year reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.	
4.04.02	Route-2	
4.04.02.01	The Bidder/its Sub-vendor who do not meet the qualification requirements stipulated at 4.04.01.01 above, may also participate provided the Bidder/its Sub vendor is a contractor who have designed, supplied, erected/supervised erection and commissioned/supervised commissioning at least one (1) number of Waste Water Treatment System (essentially comprising of Evaporator (Brine Concentrator) and/or Crystalliser) operating in an Industrial unit which should have been in successful operation for a period not less than one (1) year reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder and associates/collaborates with an Associate/Collaborator who in turn fully meets the requirements stipulated at 4.04.01.01 above.	
4.04.02.02	Bidder/its sub vendor should also have a valid ongoing collaboration and technology transfer agreement with an Associate/Collaborator meeting requirements of clause 4.04.01.01 above, valid minimum up to the end of the defect liability period of the	
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2
SUB-SECTION-I INTENT OF SPECIFICATION		PAGE 15 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION																					
	contract. In such a case Bidder/Sub vendor can either source the FGD Waste Water Treatment System from such system provider or can itself manufacture/get manufactured, supply and install the FGD Waste Water Treatment System as per the design, manufacturing and installation drawings released by such Associate/Collaborator.																					
4.04.02.03	The Bidder shall furnish a Deed of Joint Undertaking (DJU) executed by it, its Sub vendor (if applicable) and the Collaborator/Associate and each executant of DJU shall be jointly and severally liable to the Employer for successful performance of FGD waste water treatment system. The Deed of Joint Undertaking(s) (DJU) should be submitted at the time of placement of order on approved Sub vendor. In case of award, the Associate or Collaborator of the Bidder/Sub-vendor (as applicable) shall be required to furnish an on demand bank guarantee for INR 20 Million (Rupees Twenty Million) for each project.																					
4.05.00	Provenness criteria for critical equipment, auxiliaries, systems and bought out items for FGD waste water system:																					
4.05.01	The Bidder/Bidder's sub-vendor(s) is required to meet the provenness criteria and/or qualification requirement for critical equipment, auxiliaries, system and bought out items as per criteria stipulated below: Evaporator/Brine Concentrator, Crystallizer, Mechanical Vapour Compressor, Evaporator feed Heat exchanger, Crystalliser Heat exchanger for FGD Waste Water System for ZLD offered by the Bidder shall be only from such manufacturer(s) who has previously designed (either by itself or under collaboration/licensing agreement), manufactured/got manufactured the respective equipment(s) of the type, application and minimum equipment rating not less than that supplied in FGD waste water application and such equipment(s) should have been in successful operation in at least one (1) coal fired power station for a period not less than one (1) year reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.																					
<table><tr><th>Sl. No</th><th>Name of Equipment</th><th>Type of Equipment</th><th>Application</th><th>Equipment Rating</th></tr><tr><td>a)</td><td>Evaporator/Brine concentrator</td><td>Falling Film</td><td>FGD application in Coal fired power plant</td><td>Evaporator/Brine concentrator of a FGD Waste water treatment system of capacity not less than 10 m³/hr.</td></tr><tr><td>b)</td><td>Crystallizer</td><td>Forced circulation</td><td>FGD application in Coal fired power plant</td><td>Crystallizer of a FGD Waste water treatment system of capacity not less than 10 m³/hr.</td></tr><tr><td>c)</td><td>Mechanical Vapour Compressor</td><td>Centrifugal</td><td>FGD application in Coal fired power plant</td><td>Mechanical Vapour Compressor of a FGD Waste water treatment system of capacity not less than 10 m³/hr.</td></tr></table>			Sl. No	Name of Equipment	Type of Equipment	Application	Equipment Rating	a)	Evaporator/Brine concentrator	Falling Film	FGD application in Coal fired power plant	Evaporator/Brine concentrator of a FGD Waste water treatment system of capacity not less than 10 m³/hr.	b)	Crystallizer	Forced circulation	FGD application in Coal fired power plant	Crystallizer of a FGD Waste water treatment system of capacity not less than 10 m³/hr.	c)	Mechanical Vapour Compressor	Centrifugal	FGD application in Coal fired power plant	Mechanical Vapour Compressor of a FGD Waste water treatment system of capacity not less than 10 m³/hr.
Sl. No	Name of Equipment	Type of Equipment	Application	Equipment Rating																		
a)	Evaporator/Brine concentrator	Falling Film	FGD application in Coal fired power plant	Evaporator/Brine concentrator of a FGD Waste water treatment system of capacity not less than 10 m³/hr.																		
b)	Crystallizer	Forced circulation	FGD application in Coal fired power plant	Crystallizer of a FGD Waste water treatment system of capacity not less than 10 m³/hr.																		
c)	Mechanical Vapour Compressor	Centrifugal	FGD application in Coal fired power plant	Mechanical Vapour Compressor of a FGD Waste water treatment system of capacity not less than 10 m³/hr.																		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 16 OF 19																		

CLAUSE NO.	INTENT OF SPECIFICATION					
4.05.02	Sl. No.	Name of Equipment	Type of Equipment	Application	Equipment Rating	
	d)	Evaporator feed Heat Exchanger	Plate type /Tube & Shell type	FGD application in Coal fired power plant	Evaporator feed Heat Exchanger of a FGD Waste water treatment system of capacity not less than 10 m³/hr.	
	e)	Crystallizer Heat Exchanger	Plate type/Tube & Shell type	FGD application in Coal fired power plant	Crystallizer Heat Exchanger of a FGD Waste water treatment system of capacity not less than 10 m³/hr.	
	Bidder shall offer and supply only the type of the above equipment(s) for which he himself or the manufacturer proposed by the Bidder for the above equipment(s) is qualified.					
	A JV / Subsidiary Company formed for manufacturing and supply of equipment(s) as listed at clause no. 4.05.01 above in India can also manufacture such equipment(s), provided that it has a valid collaboration or licensing agreement for design, engineering, manufacturing of such equipment(s) in India with a qualified equipment manufacturer who meets the requirements stipulated at clause 4.05.01 above (or the technology provider of the qualified equipment manufacturer) for the respective equipment(s). Before taking up the manufacturing of such equipment(s), the bidder/his sub-vendor(s) must create/have created manufacturing facilities at his works as per collaborator's/licenser's design, manufacturing and quality control system for such equipment(s).					
4.05.03	Further, in such a case, such qualified equipment manufacturers should have, directly or indirectly through its Holding company/Subsidiary company, at least 26% equity participation in the Indian Joint Venture Company/Subsidiary Company, which shall be maintained for a lock-in period of seven (7) years from the date of incorporation of such Joint Venture/Subsidiary or upto the end of defect liability period of the contract, whichever is later.					
	In case the Bidder or the proposed sub-vendor is not manufacturer of proven Evaporator/Brine concentrator as per clause 4.05.01 (a) above but is a manufacturer of Evaporator/Brine concentrator for any Industrial unit, the Bidder or the proposed sub-vendor can also manufacture Evaporator/Brine concentrator, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such Evaporator/Brine concentrator in India with such manufacturer who meet the requirements stipulated at clause 4.05.01 (a) above for the Evaporator/Brine concentrator. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipment.					
4.05.04	In case the Bidder or the proposed sub-vendor is not manufacturer of proven Crystallizer as per clause 4.05.01 (b) above but is a manufacturer of Crystallizer for any Industrial unit, the Bidder or the proposed sub-vendor can also manufacture Crystallizer, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such Crystallizer in India with such					
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE			TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2		SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 17 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION			
	manufacturer who meet the requirements stipulated at clause 4.05.01 (a) above for the Crystallizer. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipment.			
4.05.05	In case the Bidder or the proposed sub-vendor is not manufacturer of proven Mechanical Vapour Compressor as per clause 4.05.01 (c) above but is a manufacturer of Compressor, the Bidder or the proposed sub-vendor can also manufacture Mechanical Vapour Compressor, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such Mechanical Vapour Compressor in India with such manufacturer who meet the requirements stipulated at clause 4.05.01 (c) above for the Mechanical Vapour Compressor. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipment.			
4.05.06	In case the Bidder or the proposed sub-vendor is not manufacturer of proven Evaporator feed Heat Exchanger as per clause 4.05.01 (d) above but is a manufacturer of Heat exchanger, the Bidder or the proposed sub-vendor can also manufacture Evaporator feed Heat Exchanger, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such Evaporator feed Heat Exchanger in India with such manufacturer who meet the requirements stipulated at clause 4.05.01 (d) above for the Evaporator feed Heat Exchanger. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipment.			
4.05.07	In case the Bidder or the proposed sub-vendor is not manufacturer of proven Crystallizer Heat Exchanger as per clause 4.05.01 (e) above but is a manufacturer of Heat exchanger, the Bidder or the proposed sub-vendor can also manufacture Crystallizer Heat Exchanger, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such Crystallizer Heat Exchanger in India with such manufacturer who meet the requirements stipulated at clause 4.05.01 (e) above for the Crystallizer Heat Exchanger. Before taking up the manufacturing of such equipment, the bidder/ his sub-vendor must create /have created manufacturing facilities at his works as per collaborator's /licenser's design, manufacturing and quality control system for such equipment.			
4.05.08	Before taking up the manufacturing of such equipment(s) as per clause 4.05.03, 4.05.04, 4.05.05, 4.05.06, 4.05.07 above, the Bidder/its sub vendor(s) must create (or should have created) manufacturing and testing facilities at its works as per Collaborator/licenser's design, manufacturing and quality control system for such equipments duly certified by the Collaborator/licensor. Further, the Collaborator / Licensor shall provide (or should have provided) all design, design calculation, manufacturing drawings and must provide (or should have provided) technical and quality surveillance assistance and supervision during manufacturing, erection, testing, commissioning of equipments.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION	PAGE 18 OF 19

CLAUSE NO.	INTENT OF SPECIFICATION	एनटीपीसी NTPC	
4.05.09	Bidder shall offer and supply only the type of the above equipment(s) for which it, itself or the manufacturer / Collaborator(s) / Licensor(s) proposed by the Bidder for the above equipment(s) is qualified.		
4.05.10	The Employer reserves the right to fully satisfy himself regarding capability and capacity of Bidder / its sub-vendor(s) and the proposed arrangement and may prescribe additional requirement before allowing manufacture of the equipment listed above for this contract.		
	Note to clause 4.04.00 & 4.05.00 Whenever the term 'coal fired' is appearing above, "Coal" shall be deemed to also include bituminous coal/brown coal/Anthracite Coal/lignite.		
4.06.00	Agency for Wet Stack Flow Model Study Wet Stack Flow Model Study shall be carried out by an agency which has successfully performed at least two (2) flow model studies, in separate coal fired power plants, of wet stack installed after wet limestone based FGD Absorber (without reheating of cleaned flue gas), and based on the studies developed at least two (2) wet stack liquid collection systems which are in successful operation for a period of at least two (2) years reckoned as on the date of consideration for approval but not later than six months after award date of contract to the Main bidder.		
4.07.00	Balance equipments/ systems The Bidder at his option can source the balance of plant equipment/systems not covered in clause 4.01.00, 4.02.00, 4.03.00, 4.04.00, 4.05.00 & 4.06.00 above. However for such balance of plant equipment/systems, the Employer reserves the rights to satisfy himself on the provenness of the equipment and capability and capacity of the manufacturers.		
4.08.00	Notwithstanding anything stated above, the Employer reserves the right to assess the capabilities and capacity of the Bidder/his collaborators/ licensor/ his sub-contractors to perform the contract, should the circumstances warrant such assessment in the overall interest of the Employer.		
4.09.00	To enable the approval of sub-vendors, the Bidder shall provide all necessary data such as type, design, make, capacity, duty conditions, date of commissioning/ operation etc.		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-0011-109-(1A)2	SUB-SECTION-I INTENT OF SPECIFICATION
			PAGE 19 OF 19

SUB-SECTION-II-A8

PROJECT INFORMATION- NABINAGAR-I 3X660 MW

**LOT-IA PROJECTS
FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE**

**TECHNICAL SPECIFICATION
SECTION-VI
BID DOCUMENT NO.: CS-0011-109(1A)-2**

CLAUSE NO.	PROJECT INFORMATION			
1.00.00	BACKGROUND A Joint Venture Agreement was signed between NTPC and BSEB/ Govt. of Bihar on 14.02.2008 for Establishment and Operation & Maintenance of 3x660 MW capacity coal based thermal power project near Nabinagar Distt Aurangabad Bihar and thereafter a Joint Venture company namely, Nabinagar Power Generating Company Private Limited (NPGCPL) was incorporated with equity structure of 50% each by NTPC and BSEB on 09.09.2008. The project shall be a mega project and shall be implemented during XII Plan period.			
1.01.00	Location The plant is located in Aurangabad district of Bihar at a distance of about 15 kms. from Barun in Aurangabad district of Bihar and is approachable from NH-2 through a 20 kms (approx.) long single lane metalled road. The Aurangabad city is about 55 kms. from project site. Nearest railway station is Ankorha on Sone – Garwa Road Section of Eastern Central Railway at about 1.0 Kms. from the project site. Airport The nearest airport at Gaya is at a distance of about 120 Kms from project site. The distances of site from Patna Airport and Varansi Airport are about 250 Kms & 220 Kms respectively. Vicinity plan of the proposed project is placed at Annexure -I			
1.02.01	Land About 2500 acres of land required for the project (main plant, township, ash disposal areas and corridors etc.) has been identified. Govt. of Bihar have accorded in-principle clearance for availability of land vide letter dated 15.06.2007 and 27.02.2009.			
1.02.02	Coal Coal requirement for the project is estimated about 11.25 million tonnes/annum corresponding to 90% PLF. Likely coal source for the project is North Karanpura coalfields of CCL. Application for Long Term Coal Linkage has been submitted to Ministry of Coal, Govt. of India on 21.06.2007 & 06.10.2008.			
1.02.03	Water The project site is located near the river Sone and the make up water requirement for the project is proposed to be drawn from the pondage created by Indrapuri Barrage on river Son, which is about 3 kms from the proposed site. Make up water requirement for this project would be about 7550 Cu.M/hr with ash water recirculation system and about 8480 Cu.M/hr with once through ash water system.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 1 - OF 31

CLAUSE NO.	PROJECT INFORMATION			
	Govt. of Bihar has accorded water commitment for availability of 125 cusecs of water vide letter dated 06.06.2007.			
1.03.00	Railway Siding Employer intends to construct the Railway siding to project site from the nearest existing railway line. However, the same may not be available to the bidder for his use to transport equipment & material. Bidder may visit the site and acquaint themselves with the facilities available.			
1.04.00	(i) Coal Quality Parameters / Fuel Oil Characteristics & Plant Water details: The coal quality parameters and Fuel oil Characteristics are indicated in Table-1 & Table-2A & 2B resp. below. Water data (ii) Process water: Source: Terminal point: Process water quality is based on COC given in Table-3. (iii) Clarified water: Terminal point: Clarified water quality is indicated in Table-3. (iv) DM water for Equipment cooling water system. Terminal point: DM water quality is indicated in Table-4.			
1.05.00	Steam Generator and ESP data: refer Table-5.			
1.06.00	Drawings are enclosed as per Table-6 for initial overview to the Bidder.			
2.00.00	NOT USED			
3.00.00	Capacity : 3 x 660 MW			
4.00.00	Metrological Data Important meteorological data from nearest observatory at Dehri is placed at Annexure -II.			
5.00.00	CRITERIA FOR EARTHQUAKE RESISTANT DESIGN OF STRUCTURES AND EQUIPMENT All structures and equipment shall be designed for seismic forces adopting the site specific seismic information provided in this document and using the other provisions in accordance with IS:1893 (Part 1 to Part 4). Pending finalization			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 2 - OF 31

CLAUSE NO.	PROJECT INFORMATION															
	of Part 5 of IS:1893, provisions of part 1 shall be read along with the relevant clauses of IS:1893:1984, for embankments. A site specific seismic study has been conducted for the project site. The peak ground horizontal acceleration for the project site, the site specific acceleration spectral coefficients (in units of gravity acceleration 'g') in the horizontal direction for the various damping values and the multiplying factor (to be used over the spectral coefficients) for evaluating the design acceleration spectra are as given at Appendix-I. Vertical acceleration spectral values shall be taken as 2/3rd of the corresponding horizontal values. The site specific design acceleration spectra shall be used in place of the response acceleration spectra, given at figure-2 in IS:1893 (Part 1) and Annex B of IS:1893 (Part 4). The site specific acceleration spectra along with multiplying factors specified in Appendix-I includes the effect of the seismic environment of the site, the importance factor related to the structures and the response reduction factor. Hence, the design spectra do not require any further consideration of the zone factor (Z), the importance factor (I) and response reduction factor (R) as used in the IS:1893 (Part 1 to Part 4). Damping in Structures The damping factor (as a percentage of critical damping) to be adopted shall not be more than as indicated below for: <table><tr><td>a) Steel structures</td><td>:</td><td>2%</td></tr><tr><td>b) Reinforced Concrete structures</td><td>:</td><td>5%</td></tr><tr><td>c) Reinforced Concrete Stacks</td><td>:</td><td>3%</td></tr><tr><td>d) Steel stacks</td><td>:</td><td>2%</td></tr></table> Method of Analysis Since most structures in a power plant are irregular in shape and have irregular distribution of mass and stiffness, dynamic analysis for obtaining the design seismic forces shall be carried out using the response spectrum method. The number of vibration modes used in the analysis should be such that the sum total of modal masses of all modes considered is at least 90 percent of the total seismic mass and shall also meet requirements of IS:1893 (Part 1). Modal combination of the peak response quantities shall be				a) Steel structures	:	2%	b) Reinforced Concrete structures	:	5%	c) Reinforced Concrete Stacks	:	3%	d) Steel stacks	:	2%
a) Steel structures	:	2%														
b) Reinforced Concrete structures	:	5%														
c) Reinforced Concrete Stacks	:	3%														
d) Steel stacks	:	2%														
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 3 - OF 31													

CLAUSE NO.	PROJECT INFORMATION			
	performed as per Complete Quadratic Combination (CQC) method or by an acceptable alternative as per IS:1893 (Part 1). In general, seismic analysis shall be performed for the three orthogonal (two principal horizontal and one vertical) components of earthquake motion. The seismic response from the three components shall be combined as specified in IS:1893 (Part 1). The spectral acceleration coefficient shall get restricted to the peak spectral value if the fundamental natural period of the structure falls to the left of the peak in the spectral acceleration curve. For buildings, if the design base shear (V_B) obtained from modal combination is less than the base shear ($\bar{V}_B$) computed using the approximate fundamental period (T_a) given in IS:1893:Part 1 and using site specific acceleration spectra with appropriate multiplying factor, the response quantities (e.g. member forces, displacements, storey forces, storey shears and base reactions) shall be enhanced in the ratio of $\bar{V}_B/ V_B$. However, no reduction is permitted if $\bar{V}_B$ is less than V_B. For regular buildings less than 12m in height, design seismic base shear and its distribution to different floor levels along the height of the building may be carried out as specified under clause 7.5, 7.6 & 7.7 of IS:1893 (Part 1) and using site specific design acceleration spectra. The design horizontal acceleration spectrum value (A_h) shall be computed for the fundamental natural period as per clause 7.6 of IS:1893 (Part 1) using site specific spectral acceleration coefficients with appropriate multiplying factor given in Appendix-I. Design/Detailing for Ductility for Structures The site specific design acceleration spectra is a reduced spectra and has an in-built allowance for ductility. Structures shall be engineered and detailed in accordance with relevant Indian/International standards to achieve ductility.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2		SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)
PAGE - 4 - OF 31				

CLAUSE NO.	PROJECT INFORMATION			
	<u>APPENDIX – I</u> <u>SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT</u> The various site specific seismic parameters for the project site shall be as follows: 1) Peak ground horizontal acceleration : 0.16g 2) Multiplying factor to be applied to the site specific horizontal acceleration spectral coefficients (in units of gravity acceleration 'g') to obtain the design acceleration spectra a) for ordinary moment resisting steel frames designed and detailed as per IS:800 : 0.04 b) for braced steel frames designed and detailed as per IS:800 : 0.03 c) for special moment resisting RC frames designed and detailed as per IS:456 and IS:13920 : 0.024 d) For RCC chimney : 0.08 e) For Liquid retaining tanks : 0.048 d) for Steel chimney and Absorber tower : 0.06 d) for design of structures not covered under 2 (a) to 2 (f) above and under 3 below : 0.04 3) Multiplying factor to be applied to the site specific horizontal acceleration spectral coefficients (in units of gravity acceleration 'g') for design of equipment and structures where inelastic action is not relevant or not permitted : 0.08 Note: g = Acceleration due to gravity The horizontal seismic acceleration spectral coefficients are furnished in subsequent pages.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 5 - OF 31

CLAUSE NO.	PROJECT INFORMATION																																																																																																																																																														
	APPENDIX – I HORIZONTAL SEISMIC ACCELERATION SPECTRAL COEFFICIENTS In units of ‘g’ for BRBCL project <table><tr><th rowspan="2">Time Period (Sec)</th><th colspan="3">Damping Factor (as a percentage of critical damping)</th></tr><tr><th>2%</th><th>3%</th><th>5%</th></tr><tr><td>0.000</td><td>1.000</td><td>1.000</td><td>1.000</td></tr><tr><td>0.030</td><td>1.000</td><td>1.000</td><td>1.000</td></tr><tr><td>0.050</td><td>1.750</td><td>1.607</td><td>1.443</td></tr><tr><td>0.100</td><td>3.737</td><td>3.060</td><td>2.374</td></tr><tr><td>0.104</td><td>3.904</td><td>3.174</td><td>2.443</td></tr><tr><td>0.123</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.150</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.200</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.250</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.300</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.350</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.400</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.450</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.500</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.516</td><td>3.904</td><td>3.401</td><td>2.753</td></tr><tr><td>0.550</td><td>3.662</td><td>3.401</td><td>2.753</td></tr><tr><td>0.600</td><td>3.357</td><td>3.142</td><td>2.753</td></tr><tr><td>0.607</td><td>3.320</td><td>3.105</td><td>2.753</td></tr><tr><td>0.670</td><td>3.006</td><td>2.813</td><td>2.493</td></tr><tr><td>0.700</td><td>2.877</td><td>2.693</td><td>2.386</td></tr><tr><td>0.750</td><td>2.685</td><td>2.513</td><td>2.227</td></tr><tr><td>0.800</td><td>2.518</td><td>2.356</td><td>2.088</td></tr><tr><td>0.850</td><td>2.369</td><td>2.218</td><td>1.965</td></tr><tr><td>0.900</td><td>2.238</td><td>2.094</td><td>1.856</td></tr><tr><td>0.950</td><td>2.120</td><td>1.984</td><td>1.758</td></tr><tr><td>1.000</td><td>2.014</td><td>1.885</td><td>1.670</td></tr><tr><td>1.050</td><td>1.918</td><td>1.795</td><td>1.590</td></tr><tr><td>1.100</td><td>1.831</td><td>1.714</td><td>1.518</td></tr><tr><td>1.150</td><td>1.751</td><td>1.639</td><td>1.452</td></tr><tr><td>1.200</td><td>1.678</td><td>1.571</td><td>1.392</td></tr><tr><td>1.250</td><td>1.611</td><td>1.508</td><td>1.336</td></tr><tr><td>1.300</td><td>1.549</td><td>1.450</td><td>1.285</td></tr><tr><td>1.350</td><td>1.492</td><td>1.396</td><td>1.237</td></tr><tr><td>1.400</td><td>1.439</td><td>1.346</td><td>1.193</td></tr><tr><td>1.450</td><td>1.389</td><td>1.300</td><td>1.152</td></tr><tr><td>1.500</td><td>1.343</td><td>1.257</td><td>1.113</td></tr><tr><td>1.550</td><td>1.299</td><td>1.216</td><td>1.077</td></tr></table>				Time Period (Sec)	Damping Factor (as a percentage of critical damping)			2%	3%	5%	0.000	1.000	1.000	1.000	0.030	1.000	1.000	1.000	0.050	1.750	1.607	1.443	0.100	3.737	3.060	2.374	0.104	3.904	3.174	2.443	0.123	3.904	3.401	2.753	0.150	3.904	3.401	2.753	0.200	3.904	3.401	2.753	0.250	3.904	3.401	2.753	0.300	3.904	3.401	2.753	0.350	3.904	3.401	2.753	0.400	3.904	3.401	2.753	0.450	3.904	3.401	2.753	0.500	3.904	3.401	2.753	0.516	3.904	3.401	2.753	0.550	3.662	3.401	2.753	0.600	3.357	3.142	2.753	0.607	3.320	3.105	2.753	0.670	3.006	2.813	2.493	0.700	2.877	2.693	2.386	0.750	2.685	2.513	2.227	0.800	2.518	2.356	2.088	0.850	2.369	2.218	1.965	0.900	2.238	2.094	1.856	0.950	2.120	1.984	1.758	1.000	2.014	1.885	1.670	1.050	1.918	1.795	1.590	1.100	1.831	1.714	1.518	1.150	1.751	1.639	1.452	1.200	1.678	1.571	1.392	1.250	1.611	1.508	1.336	1.300	1.549	1.450	1.285	1.350	1.492	1.396	1.237	1.400	1.439	1.346	1.193	1.450	1.389	1.300	1.152	1.500	1.343	1.257	1.113	1.550	1.299	1.216	1.077
	Time Period (Sec)	Damping Factor (as a percentage of critical damping)																																																																																																																																																													
		2%	3%	5%																																																																																																																																																											
	0.000	1.000	1.000	1.000																																																																																																																																																											
	0.030	1.000	1.000	1.000																																																																																																																																																											
	0.050	1.750	1.607	1.443																																																																																																																																																											
	0.100	3.737	3.060	2.374																																																																																																																																																											
	0.104	3.904	3.174	2.443																																																																																																																																																											
	0.123	3.904	3.401	2.753																																																																																																																																																											
	0.150	3.904	3.401	2.753																																																																																																																																																											
	0.200	3.904	3.401	2.753																																																																																																																																																											
	0.250	3.904	3.401	2.753																																																																																																																																																											
	0.300	3.904	3.401	2.753																																																																																																																																																											
	0.350	3.904	3.401	2.753																																																																																																																																																											
	0.400	3.904	3.401	2.753																																																																																																																																																											
	0.450	3.904	3.401	2.753																																																																																																																																																											
	0.500	3.904	3.401	2.753																																																																																																																																																											
	0.516	3.904	3.401	2.753																																																																																																																																																											
	0.550	3.662	3.401	2.753																																																																																																																																																											
	0.600	3.357	3.142	2.753																																																																																																																																																											
	0.607	3.320	3.105	2.753																																																																																																																																																											
	0.670	3.006	2.813	2.493																																																																																																																																																											
	0.700	2.877	2.693	2.386																																																																																																																																																											
	0.750	2.685	2.513	2.227																																																																																																																																																											
	0.800	2.518	2.356	2.088																																																																																																																																																											
	0.850	2.369	2.218	1.965																																																																																																																																																											
	0.900	2.238	2.094	1.856																																																																																																																																																											
	0.950	2.120	1.984	1.758																																																																																																																																																											
	1.000	2.014	1.885	1.670																																																																																																																																																											
	1.050	1.918	1.795	1.590																																																																																																																																																											
	1.100	1.831	1.714	1.518																																																																																																																																																											
	1.150	1.751	1.639	1.452																																																																																																																																																											
	1.200	1.678	1.571	1.392																																																																																																																																																											
	1.250	1.611	1.508	1.336																																																																																																																																																											
	1.300	1.549	1.450	1.285																																																																																																																																																											
	1.350	1.492	1.396	1.237																																																																																																																																																											
	1.400	1.439	1.346	1.193																																																																																																																																																											
	1.450	1.389	1.300	1.152																																																																																																																																																											
	1.500	1.343	1.257	1.113																																																																																																																																																											
	1.550	1.299	1.216	1.077																																																																																																																																																											
	LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 6 - OF 31																																																																																																																																																										

CLAUSE NO.	PROJECT INFORMATION																																																																																																																																																																		
	APPENDIX – I HORIZONTAL SEISMIC ACCELERATION SPECTRAL COEFFICIENTS In units of 'g' for BRBCL project <table><tr><th rowspan="2">Time Period (Sec)</th><th colspan="3">Damping Factor (as a percentage of critical damping)</th></tr><tr><th>2%</th><th>3%</th><th>5%</th></tr><tr><td>1.600</td><td>1.259</td><td>1.178</td><td>1.044</td></tr><tr><td>1.650</td><td>1.221</td><td>1.142</td><td>1.012</td></tr><tr><td>1.700</td><td>1.185</td><td>1.109</td><td>0.982</td></tr><tr><td>1.750</td><td>1.151</td><td>1.077</td><td>0.954</td></tr><tr><td>1.800</td><td>1.119</td><td>1.047</td><td>0.928</td></tr><tr><td>1.850</td><td>1.089</td><td>1.019</td><td>0.903</td></tr><tr><td>1.900</td><td>1.060</td><td>0.992</td><td>0.879</td></tr><tr><td>1.950</td><td>1.033</td><td>0.967</td><td>0.856</td></tr><tr><td>2.000</td><td>1.007</td><td>0.943</td><td>0.835</td></tr><tr><td>2.050</td><td>0.982</td><td>0.920</td><td>0.815</td></tr><tr><td>2.100</td><td>0.959</td><td>0.898</td><td>0.795</td></tr><tr><td>2.150</td><td>0.937</td><td>0.877</td><td>0.777</td></tr><tr><td>2.200</td><td>0.915</td><td>0.857</td><td>0.759</td></tr><tr><td>2.250</td><td>0.895</td><td>0.838</td><td>0.742</td></tr><tr><td>2.300</td><td>0.876</td><td>0.820</td><td>0.726</td></tr><tr><td>2.350</td><td>0.857</td><td>0.802</td><td>0.711</td></tr><tr><td>2.400</td><td>0.839</td><td>0.785</td><td>0.696</td></tr><tr><td>2.450</td><td>0.822</td><td>0.769</td><td>0.682</td></tr><tr><td>2.500</td><td>0.806</td><td>0.754</td><td>0.668</td></tr><tr><td>2.550</td><td>0.790</td><td>0.739</td><td>0.655</td></tr><tr><td>2.600</td><td>0.775</td><td>0.725</td><td>0.642</td></tr><tr><td>2.650</td><td>0.760</td><td>0.711</td><td>0.630</td></tr><tr><td>2.700</td><td>0.746</td><td>0.698</td><td>0.619</td></tr><tr><td>2.750</td><td>0.732</td><td>0.685</td><td>0.607</td></tr><tr><td>2.800</td><td>0.719</td><td>0.673</td><td>0.596</td></tr><tr><td>2.850</td><td>0.707</td><td>0.661</td><td>0.586</td></tr><tr><td>2.900</td><td>0.694</td><td>0.650</td><td>0.576</td></tr><tr><td>2.950</td><td>0.683</td><td>0.639</td><td>0.566</td></tr><tr><td>3.000</td><td>0.671</td><td>0.628</td><td>0.557</td></tr><tr><td>3.050</td><td>0.660</td><td>0.618</td><td>0.548</td></tr><tr><td>3.100</td><td>0.650</td><td>0.608</td><td>0.539</td></tr><tr><td>3.150</td><td>0.639</td><td>0.598</td><td>0.530</td></tr><tr><td>3.200</td><td>0.629</td><td>0.589</td><td>0.522</td></tr><tr><td>3.250</td><td>0.620</td><td>0.580</td><td>0.514</td></tr><tr><td>3.300</td><td>0.610</td><td>0.571</td><td>0.506</td></tr><tr><td>3.350</td><td>0.601</td><td>0.563</td><td>0.499</td></tr><tr><td>3.400</td><td>0.592</td><td>0.554</td><td>0.491</td></tr><tr><td>3.450</td><td>0.584</td><td>0.546</td><td>0.484</td></tr></table>				Time Period (Sec)	Damping Factor (as a percentage of critical damping)			2%	3%	5%	1.600	1.259	1.178	1.044	1.650	1.221	1.142	1.012	1.700	1.185	1.109	0.982	1.750	1.151	1.077	0.954	1.800	1.119	1.047	0.928	1.850	1.089	1.019	0.903	1.900	1.060	0.992	0.879	1.950	1.033	0.967	0.856	2.000	1.007	0.943	0.835	2.050	0.982	0.920	0.815	2.100	0.959	0.898	0.795	2.150	0.937	0.877	0.777	2.200	0.915	0.857	0.759	2.250	0.895	0.838	0.742	2.300	0.876	0.820	0.726	2.350	0.857	0.802	0.711	2.400	0.839	0.785	0.696	2.450	0.822	0.769	0.682	2.500	0.806	0.754	0.668	2.550	0.790	0.739	0.655	2.600	0.775	0.725	0.642	2.650	0.760	0.711	0.630	2.700	0.746	0.698	0.619	2.750	0.732	0.685	0.607	2.800	0.719	0.673	0.596	2.850	0.707	0.661	0.586	2.900	0.694	0.650	0.576	2.950	0.683	0.639	0.566	3.000	0.671	0.628	0.557	3.050	0.660	0.618	0.548	3.100	0.650	0.608	0.539	3.150	0.639	0.598	0.530	3.200	0.629	0.589	0.522	3.250	0.620	0.580	0.514	3.300	0.610	0.571	0.506	3.350	0.601	0.563	0.499	3.400	0.592	0.554	0.491	3.450	0.584	0.546	0.484
	Time Period (Sec)	Damping Factor (as a percentage of critical damping)																																																																																																																																																																	
		2%	3%	5%																																																																																																																																																															
	1.600	1.259	1.178	1.044																																																																																																																																																															
	1.650	1.221	1.142	1.012																																																																																																																																																															
	1.700	1.185	1.109	0.982																																																																																																																																																															
	1.750	1.151	1.077	0.954																																																																																																																																																															
	1.800	1.119	1.047	0.928																																																																																																																																																															
	1.850	1.089	1.019	0.903																																																																																																																																																															
	1.900	1.060	0.992	0.879																																																																																																																																																															
	1.950	1.033	0.967	0.856																																																																																																																																																															
	2.000	1.007	0.943	0.835																																																																																																																																																															
	2.050	0.982	0.920	0.815																																																																																																																																																															
	2.100	0.959	0.898	0.795																																																																																																																																																															
	2.150	0.937	0.877	0.777																																																																																																																																																															
	2.200	0.915	0.857	0.759																																																																																																																																																															
	2.250	0.895	0.838	0.742																																																																																																																																																															
	2.300	0.876	0.820	0.726																																																																																																																																																															
	2.350	0.857	0.802	0.711																																																																																																																																																															
	2.400	0.839	0.785	0.696																																																																																																																																																															
	2.450	0.822	0.769	0.682																																																																																																																																																															
	2.500	0.806	0.754	0.668																																																																																																																																																															
	2.550	0.790	0.739	0.655																																																																																																																																																															
	2.600	0.775	0.725	0.642																																																																																																																																																															
	2.650	0.760	0.711	0.630																																																																																																																																																															
	2.700	0.746	0.698	0.619																																																																																																																																																															
	2.750	0.732	0.685	0.607																																																																																																																																																															
	2.800	0.719	0.673	0.596																																																																																																																																																															
	2.850	0.707	0.661	0.586																																																																																																																																																															
	2.900	0.694	0.650	0.576																																																																																																																																																															
	2.950	0.683	0.639	0.566																																																																																																																																																															
	3.000	0.671	0.628	0.557																																																																																																																																																															
	3.050	0.660	0.618	0.548																																																																																																																																																															
3.100	0.650	0.608	0.539																																																																																																																																																																
3.150	0.639	0.598	0.530																																																																																																																																																																
3.200	0.629	0.589	0.522																																																																																																																																																																
3.250	0.620	0.580	0.514																																																																																																																																																																
3.300	0.610	0.571	0.506																																																																																																																																																																
3.350	0.601	0.563	0.499																																																																																																																																																																
3.400	0.592	0.554	0.491																																																																																																																																																																
3.450	0.584	0.546	0.484																																																																																																																																																																
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 7 - OF 31																																																																																																																																																															

CLAUSE NO.	PROJECT INFORMATION																																																										
6.00.00	APPENDIX – I HORIZONTAL SEISMIC ACCELERATION SPECTRAL COEFFICIENTS In units of 'g' for BRBCL project <table><tr><th rowspan="2">Time Period (Sec)</th><th colspan="3">Damping Factor (as a percentage of critical damping)</th></tr><tr><th>2%</th><th>3%</th><th>5%</th></tr><tr><td>3.500</td><td>0.575</td><td>0.539</td><td>0.477</td></tr><tr><td>3.550</td><td>0.567</td><td>0.531</td><td>0.470</td></tr><tr><td>3.600</td><td>0.559</td><td>0.524</td><td>0.464</td></tr><tr><td>3.650</td><td>0.552</td><td>0.516</td><td>0.458</td></tr><tr><td>3.700</td><td>0.544</td><td>0.509</td><td>0.451</td></tr><tr><td>3.750</td><td>0.537</td><td>0.503</td><td>0.445</td></tr><tr><td>3.800</td><td>0.530</td><td>0.496</td><td>0.439</td></tr><tr><td>3.825</td><td>0.527</td><td>0.493</td><td>0.437</td></tr><tr><td>3.850</td><td>0.523</td><td>0.490</td><td>0.434</td></tr><tr><td>3.900</td><td>0.516</td><td>0.483</td><td>0.428</td></tr><tr><td>3.950</td><td>0.510</td><td>0.477</td><td>0.423</td></tr><tr><td>4.000</td><td>0.504</td><td>0.471</td><td>0.418</td></tr></table>				Time Period (Sec)	Damping Factor (as a percentage of critical damping)			2%	3%	5%	3.500	0.575	0.539	0.477	3.550	0.567	0.531	0.470	3.600	0.559	0.524	0.464	3.650	0.552	0.516	0.458	3.700	0.544	0.509	0.451	3.750	0.537	0.503	0.445	3.800	0.530	0.496	0.439	3.825	0.527	0.493	0.437	3.850	0.523	0.490	0.434	3.900	0.516	0.483	0.428	3.950	0.510	0.477	0.423	4.000	0.504	0.471	0.418
	Time Period (Sec)	Damping Factor (as a percentage of critical damping)																																																									
		2%	3%	5%																																																							
	3.500	0.575	0.539	0.477																																																							
	3.550	0.567	0.531	0.470																																																							
	3.600	0.559	0.524	0.464																																																							
	3.650	0.552	0.516	0.458																																																							
	3.700	0.544	0.509	0.451																																																							
	3.750	0.537	0.503	0.445																																																							
	3.800	0.530	0.496	0.439																																																							
	3.825	0.527	0.493	0.437																																																							
	3.850	0.523	0.490	0.434																																																							
	3.900	0.516	0.483	0.428																																																							
	3.950	0.510	0.477	0.423																																																							
	4.000	0.504	0.471	0.418																																																							
CRITERIA FOR WIND RESISTANT DESIGN OF STRUCTURES AND EQUIPMENT All structures shall be designed for wind forces in accordance with IS:875 (Part-3) and as specified in this document. See Annexure – B for site specific information. Along wind forces shall generally be computed by the Peak (i.e. 3 second gust) Wind Speed method as defined in the standard. Along wind forces on slender and wind sensitive structures and structural elements shall also be computed, for dynamic effects, using the Gust Factor or Gust Effectiveness Factor Method as defined in the standard. The structures shall be designed for the higher of the forces obtained from Gust Factor method and the Peak Wind Speed method. Analysis for dynamic effects of wind must be undertaken for any structure which has a height to minimum lateral dimension ratio greater than “5” and/or if the fundamental frequency of the structure is less than 1 Hz. Susceptibility of structures to across-wind forces, galloping, flutter, ovalling etc. should be examined and designed/detailed accordingly following the recommendations of IS:875(Part-3) and other relevant Indian standards. It should be estimated if size and relative position of other structures are likely to enhance the wind loading on the structure under consideration. Enhancement																																																											
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 8 - OF 31																																																							

CLAUSE NO.	PROJECT INFORMATION			
	factor, if necessary, shall suitably be estimated and applied to the wind loading to account for the interference effects. Damping in Structures The damping factor (as a percentage of critical damping) to be adopted shall not be more than as indicated below for: a) Welded steel structures : 1.0% b) Bolted steel structures : 2.0% c) Reinforced concrete structures : 1.6% d) Steel stacks : As per IS:6533 & CICIND Model Code whichever is more critical. <u>ANNEXURE-B</u> <u>SITE SPECIFIC DESIGN PARAMETERS</u> The various design parameters, as defined in IS: 875 (Part-3), to be adopted for the project site shall be as follows: a) The basic wind speed “V_b” at ten b) The risk coefficient “K₁” : 1.07 c) Category of terrain : Category-2			
7.00.0	FOUNDATION SYSTEM AND GEOTECHNICAL DATA			
7.00.01	Geotechnical data and foundation system for the respective project are enclosed at annexure-III. The corresponding bore logs are enclosed at annexure-IV. The available soil data is of vicinity of proposed structures, therefore, bidder shall carryout his own detailed soil investigation for facilities under this package and shall be as per the scheme approved by owner. The scheme for geotechnical investigation shall be as given at Clause 7.07.00 and shall be approved by owner before execution. Geotechnical investigation work shall got executed by the Contractor through the agencies as mentioned in Clause No. 7.07.03. However, no time extension shall be given on account of soil investigation carried out by the Bidder. The geotechnical investigation report shall be prepared with detailed recommendations regarding type of foundation and allowable bearing pressure for various structures/ facilities and other soil parameters. The report shall be submitted for Owner’s approval prior to commencement of design of foundation.			
7.00.02				
7.00.03	The Bidder should note that nothing extra whatsoever on account of variation between soil data collected by Owner and that found by the Bidder during geotechnical investigation by him or during execution of works, shall be payable.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 9 - OF 31

CLAUSE NO.	PROJECT INFORMATION			
7.00.04	Tank Foundations a) The tanks shall rest on flexible tank pad foundation, resting on sand with concrete ring wall to retain sand. Base of the concrete ring wall shall not rest on the expansive soil, if any. b) Entire loose/ soft soil inside the concrete ring wall shall be removed and shall be filled with sand. Sand for filling shall be clean and well graded conforming to IS 383 with grading Zone I to III. c) Sand shall be spread in layers not exceeding 30cm compacted thickness over the area. Each layer shall be uniformly compacted by mechanical means like plate vibrators, small vibratory rollers, etc to achieve a relative density of not less than 80%. d) Other requirements of tank foundations shall be as per IS 803 and as specified elsewhere in the specifications.			
7.02.00	Foundation System The requirements for the foundation system to be adopted are as given in subsequent clauses. Depending upon the depth of competent strata/stratum, type of structures, functional requirement of facility, extent of cutting / filling, suitable foundation, open or pile shall be adopted with approval of owner.			
7.02.01	General Requirements a) All structures/equipment shall be supported either on suitable open foundations (isolated, combined, raft) or pile foundations depending on type of structures/facilities, sub-strata, topography etc. b) The roads, ground floor slabs, trenches, pipe pedestals, channels/drains and staircase foundation with foundation loading intensity less than 4 T / M2 may be supported on open / shallow foundations resting on virgin / controlled compacted filled up soil. c) No other foundation (other than as mentioned in (b) above) shall rest on the filled up ground / soil. d) No foundation shall rest on the black cotton soil. e) Before execution of work the bidder shall ensure that there is no obstruction to underground/overground facilities like sewer lines, pipe lines etc. Any such damage and remedial/ rectification measures shall be at the contractors cost. f) Bidder shall also ensure that there is no damage to existing nearby foundations and the foundations pertaining to this package are not placed at shallower depth than the nearby foundations. If required depth of foundation is deeper than the existing foundations, proper protection shall be provided to existing foundations.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 10 - OF 31

CLAUSE NO.	PROJECT INFORMATION			
7.02.02	g) All foundations shall be designed in accordance with relevant parts of the latest revisions of Indian Standards. h) The water table for design purpose shall be considered at Finished Ground Level. i) A combination of open and pile foundations shall not be permitted under the same equipment / structure / building. j) Foundation for equipments on ground floor For equipments of static weight upto 1.5 T, the equipment may be supported on the ground floor slab by locally thickening the slab. Thickening of the ground floor slab shall be done upto an extent of about 0.6 m beyond the plan area of the equipment on all the sides. Further, the load intensity below the equipment shall be limited to 4T/m2. Other requirements of floor slab and compaction below the floor slab shall be adhered, as specified elsewhere in the specifications. For equipment of static weight more than 1.5 T, the equipment foundation shall be taken to the founding level or shall be built up with PCC from the level as mentioned in the Table 1. The pedestal of equipment foundation or the foundation Block shall be isolated from the adjoining floor slab by providing bitumen impregnated fiber board of minimum 50 mm thick, conforming to IS: 1838 all around the equipment pedestal for the full depth of the floor slab.			
	Open Foundations In case open foundations are adopted, following shall be adhered to. a) The minimum width of foundation shall be 1.0 m. b) Minimum depth of foundation shall be 1.0m below Ground Level. c) It shall be ensured that all foundations of a particular structure/ buildings/ facility shall rest on one bearing stratum. d) Wherever the intended bearing sub-strata is virgin soil stratum but the actual stratum encountered during foundation excavation consists of filled up soil at founding level, under such cases either the foundation shall be lowered completely into the virgin stratum or the filled up soil upto the virgin layers shall be removed and built up through PCC (1:4:8) up to designed foundation level.			
	7.02.03	Pile Foundations – In case piles are adopted, following shall be adhered to :		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 11 - OF 31

CLAUSE NO.	PROJECT INFORMATION			
	i) The pile foundation shall be of RCC, Cast-in-situ bored piles as per IS:2911. Pile boring shall be done using Rotary Hydraulic Rigs/conventional tripod rig. Two stage flushing of pile bore shall be ensured by airlift technique duly approved by the Employer. If required, temporary or permanent MS liner may be provided for piling. ii) The minimum diameter of pile shall be 600 mm. The allowable load capacity of the pile in different modes (vertical compression, lateral and pullout) shall be as per approved geotechnical report & as enclosed in relevant annexure: iii) Only straight shaft piles shall be used. Minimum cast length of pile above cutoff level shall be 1.0 m. iv) The contractor shall furnish design of piles (in terms of rated capacity, length, diameter, termination criteria to locate the founding level for construction of pile in terms of measurable parameter, reinforcement for job as well as test piles, pile load test arrangement, locations of initial test piles etc.) for Engineer's approval. v) The piling work shall be carried out in accordance with IS:2911 (Relevant part) and accepted construction methodology. The construction methodology shall be submitted by the Contractor for Engineer's approval. vi) Number of initial load tests to be performed for each diameter and rated capacity of pile shall be subject to minimum as under. Vertical Lateral Minimum of 2 Nos. in each mode. Uplift vii) The initial pile load test shall be conducted with test load upto three times the estimated pile capacity. In case of vertical compression test (initial test) the method of loading shall be cyclic as per IS:2911 (relevant part). viii) Load test shall be conducted at pile Cut-off Level (COL). If the water table is above the COL the test pit shall be kept dry throughout the test period by suitable de-watering methods. Alternatively the vertical load test may be conducted at a level higher than COL. In such a case, an annular space shall be created to remove the effect of skin friction above COL by providing an outer casing of suitable diameter larger than the pile diameter. ix) Number of routine pile load tests to be performed for each diameter/allowable capacity of pile shall be as under : i) Vertical : 0.5% of the total number of piles provided. ii) Lateral : 0.5% of the total number of piles provided.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 12 - OF 31

CLAUSE NO.	PROJECT INFORMATION			
	x) The routine tests on piles shall be conducted upto test load of one and half times the allowable pile capacity. Piles for routine load tests shall be approved by the Employer. xi) In case, routine pile load test shows that the pile has not achieved the desired capacity or pile(s) have been rejected due to any other reason, then the Contractor shall install additional pile(s) as required and the pile cap design shall accordingly be reviewed and modified, if required. xii) Testing of piles and interpretation of pile load test results shall be carried out as per IS:2911 (Part-4). Contractor shall ensure that all the measuring equipment and instruments are properly calibrated at a reputed laboratory / institute prior to their use. Settlement / movement of the pile top shall be made by Linear Variable Differential Transducers (LVDT) having a least count of 0.01mm. xiii) The test load on initial test piles shall be applied by means of reaction from anchor piles / rock anchors alone or combination of anchor piles / rock anchors and kentledge with concrete blocks. xiv) Low Strain Pile Integrity test shall be conducted on all test piles and job piles. This test shall be used to identify the routine load test and not intended to replace the use of static load test. This test is limited to assess the imperfection of the pile shaft and shall be undertaken by an independent specialist agency to be approved by Engineering department of Owner. The test equipment shall be of TNO or PDI make or equivalent. The process shall confirm to ASTM. xv) High Strain Dynamic Load Test may be carried out for routine load testing of working piles. However, at least two numbers of static routine vertical load tests shall be carried out on pile on which high strain dynamic load test has already been carried out for establishing the correlation between the two tests. In case of discrepancy if any between dynamic and static vertical load tests, then additional static routine vertical load tests shall be conducted as decided by the Engineer and the results of static routine vertical load shall prevail. Number of routine vertical pile load tests as per clause 7.02.03 (ix) shall be total of static routine vertical load test and high strain dynamic load tests. The procedure to carry out the test shall be submitted to the Engineer. The test and equipment shall conform to ASTM D4945-00. The test shall be conducted by an experienced independent test agency approved by the owner. Field data shall be submitted to the site engineer and shall include force velocity curves, pile capacity, simulated static load test curve, net and total pile displacement, pile integrity. A (Case pile wave analysis) CAPWAP or equivalent software analysis shall be conducted on the field data for correct capacity estimation and to evaluate end bearing and skin friction components			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 13 - OF 31

CLAUSE NO.	PROJECT INFORMATION			
	of the pile. xvi) From load considerations, single pile may be used under a column/tower. In that case, pile shall be connected with tie beams at pile cut off level in both directions. xvii) Contribution of frictional resistance of filled up soil if any, shall not be considered for computation of frictional resistance of piles. xviii) Reinforcement for job piles shall be designed as following: ▮ Compression + bending piles: For these piles, the allowable safe pile capacities in compression and bending shall be considered. ▮ Tension + bending piles: For these piles, the actual pile forces to be considered. However, maximum 3 types of combinations for varying percentage of tension capacity + bending case may be designed & adopted by contractor for the entire scope of work under this package.			
7.03.00	Special Requirements			
7.03.01	Details of treatment for foundations / underground structures required to counteract soil / water chemical environment shall be as per detailed geotechnical investigation to be carried out by contractor. Contractor shall carry out chemical analysis during detailed geotechnical investigation and required treatment shall be provided accordingly.			
7.04.00	Excavation, Filling and Dewatering			
7.04.01	For excavation works, comprehensive dewatering with well point or deep wells arrangement, if required, shall be adopted. Scheme for dewatering and design with all computations and back up data for dewatering shall be submitted for the owner's information. The water table shall be maintained at 0.5m below the founding depth.			
7.04.02	Excavation for shallow foundations shall be covered with PCC immediately after reaching the founding level. In case of any local loosening of soil or any loose pockets are encountered at founding level during excavation the same shall be removed and compensated by PCC M7.5. The final layer of about 300 mm thickness above the founding level shall be excavated by suitable means, so as to avoid disturbance to founding stratum.			
7.04.03	Backfilling around foundations, pipes, trenches, sumps, pits, plinths, etc. shall be carried out with approved material in layers not exceeding 300 mm compacted thickness (higher thickness of layers upto 500mm with heavy mechanical compacting equipment) and each layer shall be compacted to 90% of standard proctor density for cohesive soils and to 80% of relative density for non-cohesive soils Rock pieces having size less than 150 mm and interstices filled with soil may be used for backfilling around foundation, plinths etc. and shall be compacted to minimum of 85% of original stack of material after filling the interstices.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 14 - OF 31

CLAUSE NO.	PROJECT INFORMATION			
7.04.04	Founding level for trenches/channels shall be decided as per functional requirement. The bottom of excavation shall be properly compacted prior to casting of bottom slab of trenches / channels.			
7.04.05	CBR tests for pavement/road design shall be carried out by the Contractor after earth filling (if applicable) has been completed upto the formation level.			
7.04.06	The contractor shall take all necessary measures during excavation to prevent the hazards of falling or sliding of material or article from any bank or side of such excavation which is more than one and a half meter above the footing by providing adequate piling, shoring, bracing etc. against such bank or sides. Adequate and suitable warning signs shall be put up at conspicuous places at the excavation work to prevent any persons or vehicles falling into the excavation trench. No worker should be allowed to work where he may be stuck or endangered by excavation machinery or collapse of excavations or trenches.			
7.05.00	EXCAVATION IN ROCK Excavation in rock shall be carried out by mechanical means and if blasting is required for founding of some of the structures under this package, control blasting only shall be carried out.			
7.05.01	Controlled blasting shall be done by a specialised agency duly approved by Engineer. All controlled blasting shall be done by using time delay detonators (i.e. excel type).			
7.05.02	a) Contractor shall engage an agency expert in blasting such as, NIRM (National Institute of Rock Mechanics), CMPDIL, Central Institute of Mining and Fuel Research Dhanbad, Dept. of Mining of Govt. Institutions etc. to design detailed blasting scheme and get the same approved from Engineer before carrying out the blasting operation. All blasting shall be done as per the approved blasting scheme & initial blasting operations shall be done under the supervision & guidance of the representative of the blasting expert. b) All the statutory laws, (Explosives Act etc.) rules, regulations, Indian Standards, etc. pertaining to the acquisition, transport, storage, handling and use of explosives, etc. shall be strictly followed. c) The Contractor shall obtain Licenses from Competent Authorities for undertaking blasting work as well as for procuring, transporting to site and storing the explosives as per explosives act. The Contractor shall be responsible for the safe transport, use, custody and proper accounting of the explosive Materials. d) The Contractor shall be responsible and liable for any accident and injury / damage which may occur to any person or property of the project or public on account of any operations connected with the storage, transportation, handling or use of explosive and blasting operations.			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 15 - OF 31

CLAUSE NO.	PROJECT INFORMATION
7.06.00	Sheeting & Shoring The contractor shall ascertain for himself the nature of materials to be excavated and difficulties, if any, likely to be encountered in excavation while executing the work. Sheet piling, sheeting and shoring, bracing and maintaining suitable slopes, drainage, etc. shall be provided and installed by the Contractor, to the satisfaction of the Engineer.
7.07.00	Geotechnical Investigation The Contractor shall carry out detailed geotechnical investigation in the areas under his scope for establishing the sub-surface conditions and to decide type of foundations for the structures envisaged, construction methods, any special requirements/treatment called for remedial measures for sub-soil/ foundations etc. in view of soft sub-soils, aggressive sub-soils and water, expansive/swelling soils etc. prior to commencement of detailed design/drawings. The Contractor shall obtain the approval for the field testing scheme proposed by him from the Owner before undertaking the geotechnical investigation work.
7.07.01.00	Scheme of geotechnical Investigation
7.07.02.01	Field test shall include but not be limited to the following: Boreholes, Standard Penetration Test (SPT), Dynamic Cone Penetration Test (DCPT), collection of disturbed samples (DS) and undisturbed soil samples (UDS), Trial Pits (TP), Plate Load Tests (PLT), Electrical Resistivity Test (ERT), In situ field permeability tests, collection of water samples, etc.
7.07.02.02	The diameter of borehole shall be minimum 150 mm in soil and 76 mm in rock. The diameter of UDS sampler shall be 100 mm minimum. Core drilling in rock shall be done by using hydraulically feed rotary drill & double tube core barrel with diamond bit.
7.07.02.03	The minimum tests are indicated in Clause No. 7.08.00. Adequate number of tests shall be conducted up to sufficient depth for complete determination of subsoil conditions. The depth of boreholes shall be as specified in Appendix A. SPT shall be carried out in all types of soil deposits and in all rock formations with core recovery up to 20%, met within a borehole. This test shall be conducted at every 3.0 m interval or at change of strata, up to the final depth. SPT 'N' of 100 and above shall be referred as refusal. UDS shall be collected at every 3.0 m interval or at change of strata up to depth of borehole. UDS may be replaced by additional SPT, if SPT 'N' value in the strata is above 50.
7.07.02.04	Laboratory tests shall be done as per relevant IS codes. The laboratory tests, not be limited to the following shall be conducted on disturbed and undisturbed soil samples, rock samples & water samples collected during field investigations in sufficient numbers. Laboratory Tests on Soil Samples Laboratory tests shall be carried out on disturbed and undisturbed soil samples for Grain Size Analysis, Hydrometer Analysis, Atterberg Limits, Triaxial Shear Tests (UU), Natural Moisture Content, Specific Gravity and Bulk Unit Weight, Consolidation Tests, Unconfined Compression Test, Free swell Index, Shrinkage Limit, Swell
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2 SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW) PAGE - 16 - OF 31


CLAUSE NO.	PROJECT INFORMATION				
7.07.02.05	Pressure Test, Chemical Analysis test on soil and water samples to determine the carbonates, sulphates, chlorides, nitrates, pH, organic matter and any other chemicals harmful to concrete and reinforcement/ steel.				
	Laboratory Tests on Rock Samples				
	Moisture content, porosity & density, Specific Gravity, Hardness, Soundness, Slake durability index, Unconfined compression test (Both at saturated and in-situ water content), Point load strength index and deformability test (Both at saturated and in-situ water content) shall be carried out on rock samples.				
	Geotechnical investigation (field & laboratory) shall be carried out in accordance with the provisions of relevant Indian Standards.				
7.07.03.00	On completion of all field & laboratory work, geotechnical investigation report shall be submitted for Owner’s review/approval. The Geotechnical investigation report shall contain geological information of the region, procedure adopted for investigation, field & laboratory observations/ data/ records, analysis of results & recommendations on type of foundation for different type of structures envisaged for all areas of work with supporting calculations. Recommendations on treatment for soil, foundation, based on subsoil characteristics, soft soils, aggressive chemicals, expansive soils, etc.				
	Recommendations on foundation system and the net allowable bearing pressures and pile capacity shall be based on the conservative values of geotechnical investigation data.				
	Geotechnical investigation work shall be got executed by the Contractor through the following agencies.				
	1. C.E.TESTING COMPANY Pvt. Ltd, Kolkata 2. Cengrs Geotechnica Pvt. Ltd, New Delhi 3. M.K. Soil Testing Laboratory, Ahemdabad 4. SECON Pvt Ltd, Bangalore 5. Soil Engineering Consultants, New Delhi 6. Orbital Infrastructure Consultancy & Research Pvt. Ltd. Cuttack 7. KCT Consultancy Services, Ahemdabad 8. ARKITECHNO Consultants (India) Pvt. Ltd. Bhubaneswar				
7.08.00	Geotechnical Investigation Scheme				
a)	Boreholes (Minimum)				
	S.N	Structure	Spacing/Number of borehole	Depth of borehole	Remarks
	1	FGD	Minimum 14 Nos.	Depth of boreholes shall be 25m to 35m.	Depth of
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2		SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 17 - OF 31

CLAUSE NO.	PROJECT INFORMATION					
	2	Crusher House	Minimum 2 Nos.	Depth of boreholes shall be 25m to 35m.	boreholes shall be as mentioned in column "Depth of Borehole" or 5m continuous in rock with RQD > 25% whichever is earlier.	
	3	Gypsum and Lime storage area	Minimum 10 Nos.	Depth of boreholes shall be 15m to 25m		
	4	Other Structure/Facility	Minimum 2 Nos. boreholes under each area / facility	15 to 20 m		
	5	Chimney	Minimum 2 Nos.	30 to 35m		
	b) Other Field Tests (Minimum)					
	1	Cyclic Plate Load Test (CPLT)	3 nos	Test Depth from 2 to 4 m		
	2	Trial Pit (TP)	5 Nos.	Depth - 3 m		
	3	In Situ Permeability Test In Boreholes	In minimum 3 Nos. of boreholes	Tests shall be conducted at depths of 1.0m, 3.0m, 5.0m, 8.0m and 12.0m.		
	4	ERT	Minimum 10 Nos.			
	• Depth and location of Boreholes and other field tests (PLT, ERT, field permeability tests etc.) shall be approved by Owner before execution of geotechnical investigation work. • Investigation in any other building / structure / facilities / trestles which are not mentioned above shall also be carried out, if required, by the bidder for the facilities under his scope.					
	LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE			TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 18 - OF 31

CLAUSE NO.	PROJECT INFORMATION																										
	Annexure-III (New Nabinagar-I) SOIL DATA AND FOUNDATION SYSTEM Employer has carried out geotechnical investigation in the areas near to this package. Logs of representative boreholes to be used for bidder's information in the vicinity of proposed area are enclosed at Annexure-II. The bidder is required to carry out geotechnical investigation as per clause no. 7.07.00 and ascertain the pile capacity and bearing capacity. The onus of correct assessment / interpretation and understanding of the existing subsoil condition / data is on the Bidder. Ground water table is encountered at a depth of about 12.0 to 14.0m below natural ground level (NGL) at the time of investigation. Fluctuation may occur in ground water table due to seasonal variation. The natural ground level is varying as per enclosed contour/spot level drawing. a) The foundation system to be adopted for different structures shall be as given in Table – 1 below 2.00.00Table – 1: Net Allowable Bearing Pressure <table><tr><th>STRUCTURE</th><th>TYPE OF FOUNDATION TO BE ADOPTED</th></tr><tr><td>FGD and related structures</td><td>Open/Piles</td></tr></table> b) During design the Allowable Bearing Pressure shall be as furnished in Table-2. Bidder is required to carry out geotechnical investigation in this area. The allowable bearing pressure shall be adopted after approval of geotechnical investigation report by owner. However, the maximum allowable bearing pressure shall be as per the approved geotechnical report and shall be limited to the values as furnished in Table-2. 3.00.00 4.00.00Table – 2: Net Allowable Bearing Pressure <table><tr><th rowspan="3">Structure</th><th rowspan="3">Foundin g Level in RL</th><th colspan="3">Net Allowable Bearing Pressure T/m²</th></tr><tr><th colspan="2">Isolated / Strip</th><th rowspan="2">Rafts (width > 6m) for 75mm settlement</th></tr><tr><th>width upto 6 m for 25mm settlement</th><th>Width upto 6m for 40mm settlement</th></tr><tr><td rowspan="2">FGD and related structures</td><td>1.5 m below NGL</td><td>5.0</td><td>6.0</td><td>7.0</td></tr><tr><td>2.5 m below</td><td>6.0</td><td>7.0</td><td>8.0</td></tr></table>				STRUCTURE	TYPE OF FOUNDATION TO BE ADOPTED	FGD and related structures	Open/Piles	Structure	Foundin g Level in RL	Net Allowable Bearing Pressure T/m ²			Isolated / Strip		Rafts (width > 6m) for 75mm settlement	width upto 6 m for 25mm settlement	Width upto 6m for 40mm settlement	FGD and related structures	1.5 m below NGL	5.0	6.0	7.0	2.5 m below	6.0	7.0	8.0
	STRUCTURE	TYPE OF FOUNDATION TO BE ADOPTED																									
	FGD and related structures	Open/Piles																									
	Structure	Foundin g Level in RL	Net Allowable Bearing Pressure T/m ²																								
			Isolated / Strip		Rafts (width > 6m) for 75mm settlement																						
			width upto 6 m for 25mm settlement	Width upto 6m for 40mm settlement																							
	FGD and related structures	1.5 m below NGL	5.0	6.0	7.0																						
		2.5 m below	6.0	7.0	8.0																						
	LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 19 - OF 31																						

CLAUSE NO.	PROJECT INFORMATION					
			NGL			
			3.5 m below NGL	9.0	10.0	12.0
	The net allowable bearing pressure higher than above mentioned values shall not be permitted. At intermediate levels the bearing capacity shall be same as the net allowable bearing pressure corresponding to the immediate shallower level mentioned above.					
	c)	Permissible Settlement of Foundations: For open foundations, the total permissible settlement and differential settlement shall be governed by IS: 1904 and from functional requirements whichever is more stringent. However, total settlement shall be restricted to the following:				
	Isolated, Strip & Raft (Mill foundations/machine foundation)				25 mm	
	Isolated & Strip (Other than Mill foundations/machine foundation)				40 mm	
	Raft (widths greater than 6 m) (Other than Mill foundations/machine foundation)				75 mm	
	In case the total permissible settlement is to be restricted to less than as above specified from functional requirements, then the net allowable bearing pressure shall be reduced after review in consultation with Engineer.					
	d)	The diameter of pile, minimum length and maximum allowable capacity of piles shall be as given below:				
		Pile Diameter (mm)	Minimum Length of Bored Pile Below Cut-off Level (m)	Safe Load Capacity in		
				Vertical Comp. (MT)	Pullout (MT)	Lateral (MT)
FGD and related structures		600	26.0	140.0	45.0	7.0
		760	27.0	250	75.0	12.5
- Cut off Level (COL) is assumed at 3.0 m below FGL (RL (+) 121.2m). If the COL is shallower than the assumed COL, then the length of the pile shall be increased accordingly.						
e)	The criteria for Pile Termination (founding level) shall be as given below:					
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2		SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)		PAGE - 20 - OF 31

CLAUSE NO.	PROJECT INFORMATION				
	Cement Type	Ordinary Portland Cement (OPC)/Portland Pozzolana Cement (PPC)			
	Concrete Grade	As specified elsewhere in the specifications			
	Type of Reinforcement	As specified elsewhere in the specifications			
	Cover to Reinforcement	As specified elsewhere in the specifications			
	The termination level of the pile shall be decided based on the following criterion				
	i)	Minimum length of the pile below COL (cut off level) shall be as specified above			
	ii)	The minimum pile length for each group of piles shall be determined based on the nearest borelog. A minimum embedment of 4.0m into the very dense sand strata with SPT 'N' value greater than 40 as observed in such borelog shall be ensured, while deciding the minimum length of pile. For pile termination, SPT 'N' values shall be used from the nearby borelog data. The boreholes are in the bidder's scope and shall be conducted as per the enclosed scheme.			
	iii)	However, in no case the length of pile shall be less than the minimum length determined as in (i) or (ii) above whichever is longer, for that pile group.			
	g)	Special Requirements:			
	1)	Chemicals in ground water and subsoil, as observed during investigation are:			
	Chemical	SO ₃	Chlorides	pH	
	Ground Water	35 -40	15 - 22 ppm	7.2 - 7.7	
	Sub-soil	0.01 - 0.02%	0.016 -0.02%	7.0 - 9.0	
	2)	In view of the above, the following shall be adopted for all foundations and sub-structures,			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2		SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 21 - OF 31

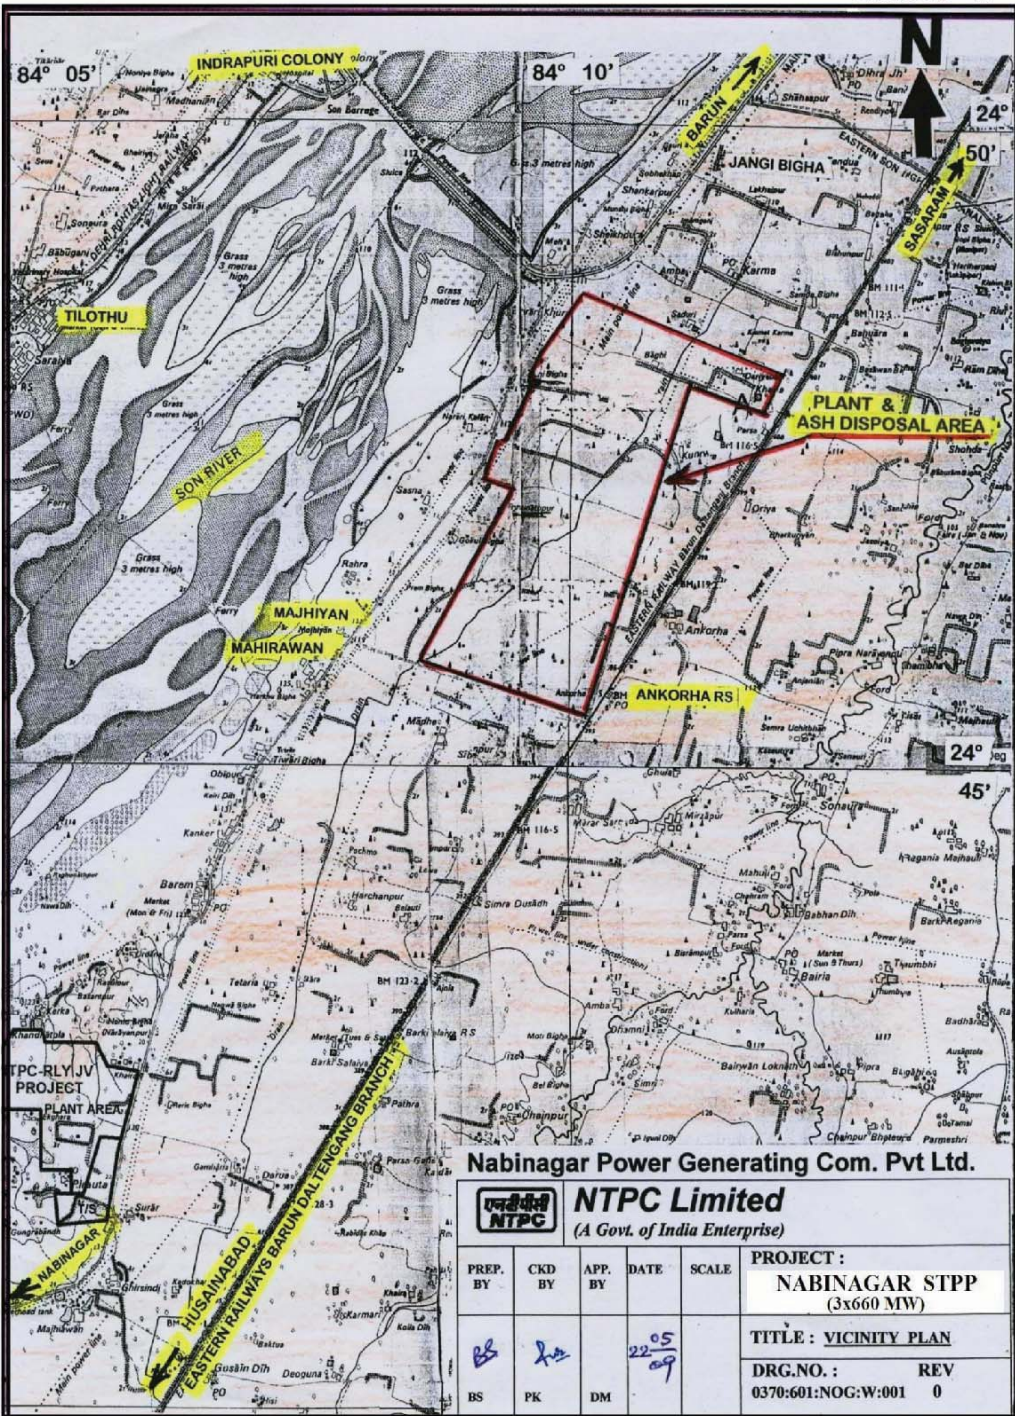CLAUSE NO.	PROJECT INFORMATION																																
	ANNEXURE – I EXHIBIT - 1  Nabinagar Power Generating Com. Pvt Ltd. एन टी पी सी NTPC NTPC Limited (A Govt. of India Enterprise) <table><tr><td>PREP. BY</td><td>CKD BY</td><td>APP. BY</td><td>DATE</td><td>SCALE</td><td>PROJECT :</td></tr><tr><td>BS</td><td>PK</td><td>DM</td><td>22-05-09</td><td></td><td>NABINAGAR STPP (3x660 MW)</td></tr><tr><td colspan="5"></td><td>TITLE : VICINITY PLAN</td></tr><tr><td colspan="5"></td><td>DRG.NO. : REV</td></tr><tr><td colspan="5"></td><td>0370:601:NOG:W:001 0</td></tr></table>			PREP. BY	CKD BY	APP. BY	DATE	SCALE	PROJECT :	BS	PK	DM	22-05-09		NABINAGAR STPP (3x660 MW)						TITLE : VICINITY PLAN						DRG.NO. : REV						0370:601:NOG:W:001 0
PREP. BY	CKD BY	APP. BY	DATE	SCALE	PROJECT :																												
BS	PK	DM	22-05-09		NABINAGAR STPP (3x660 MW)																												
					TITLE : VICINITY PLAN																												
					DRG.NO. : REV																												
					0370:601:NOG:W:001 0																												
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 22 - OF 31																														

PROJECT INFORMATION

ANNEXURE - I
SHEET 1 OF 2

जलवायवी सारणी
CLIMATOLOGICAL TABLE

1951 से 1980 तक के प्रेम्बो पर आपारित

समुद्री तल माध्य से ऊँचाई

अज्ञात देशांतर

STATION : DEHRI

[illegible]

LOT-IA PROJECTS
FLUE GAS DESULPHURISATION (FGD) SYSTEM
PACKAGE

**TECHNICAL SPECIFICATION
SECTION-VI, PART-A
BID DOC. NO.:CS-0011-109(1A)-2**

**SUB SECTION-II-A8
PROJECT INFORMATION
NABINAGAR STPP-I
(3X660MW)**

PAGE - 23 - OF 31

जलवायवी सारणी
CLIMATOLOGICAL TABLE

1. **Introduction**

[illegible]

CLAUSE NO.	PROJECT INFORMATION						
	TABLE – 1						
	COAL CHARACTERISTICS						
	Sl. No.	Description	Symbol	Design Coal	Worst Coal	Best Coal	Range of Adequacy Coal
	1	2	3	4	5	6	7
	A.	PROXIMATE ANALYSIS (As received basis)					
	1.	Total Moisture	%	15.00	17.00	12.00	11.00-17.00
	2.	Ash	%	45.00	48.00	38.00	36.00-49.00
	3.	Volatile matter	%	18.00	17.00	22.00	23.00-17.00
	4.	Fixed carbon	%	22.00	18.00	28.00	30.00-17.00
	B.	ULTIMATE ANALYSIS (As received basis)					
	1.	Carbon	C%	29.80	25.40	39.00	41.20-24.90
	2.	Hydrogen	H2%	3.00	2.80	3.20	3.30-2.60
	3.	Nitrogen	N2%	0.8	0.70	1.00	1.30-0.50
	4.	Oxygen (By difference)	O2%	5.4	5.10	5.70	6.00-5.00
	5.	Sulphur	S%	0.3	0.50	0.20	0.20-0.60
	6.	Carbonates	CO3%	0.50	0.40	0.60	0.70-0.30
	7.	Phosphorous	P2%	0.2	0.10	0.30	0.30-0.10
	8.	Total Moisture	H2O%	15.00	17.00	12.00	11.00-17.00
	9.	Ash	%	45.00	48.00	38.00	36.00-49.00
	10.	Gross Calorific Value	KCal/Kg	3200	2800	4000	4200 - 2700
	11.	Hard grove index		55	50	60	65-45
	12.	YGP Index		70	80	60	85-55
	C.	ASH ANALYSIS					
	1.	Silica	(SiO2)%	58.65	59.00	58.20	56.9-59.20
	2.	Alumina	(Al2O3)%	28.80	28.00	29.50	27.70-30.00
	3.	Iron Oxide	(Fe2O3)%	5.50	6.00	4.70	4.50-6.50
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE			TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2		SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)		PAGE - 25 - OF 31

CLAUSE NO.	PROJECT INFORMATION						
	~~Sl. No.~~	~~Description~~	~~Symbol~~	~~Design Coal~~	~~Worst Coal~~	~~Best Coal~~	~~Range of Adequacy Coal~~
	~~1~~	~~2~~	~~3~~	~~4~~	~~5~~	~~6~~	~~7~~
	~~4.~~	~~Titania~~	~~(TiO2)%~~	~~1.80~~	~~2.00~~	~~1.70~~	~~1.50-2.10~~
	~~5.~~	~~Phosphoric Anhydride~~	~~(P2O5)%~~	~~0.70~~	~~0.60~~	~~0.90~~	~~0.40-0.95~~
	~~6.~~	~~Lime~~	~~(CaO)%~~	~~1.50~~	~~1.20~~	~~1.90~~	~~1.00-2.10~~
	~~7.~~	~~Magnesia~~	~~(MgO)%~~	~~1.30~~	~~1.50~~	~~1.20~~	~~1.50-2.10~~
	~~8.~~	~~Sulphuric Anhydride~~	~~(SO3)%~~	~~0.50~~	~~0.60~~	~~0.40~~	~~0.40-0.62~~
	~~9.~~	~~Sodium Oxide~~	~~(Na2O)%~~	~~0.10~~	~~0.08~~	~~0.30~~	~~0.35-0.08~~
	~~10.~~	~~Balance Alkalies (By Difference)~~	~~%~~	~~1.15~~	~~1.02~~	~~1.2~~	~~1.20-0.90~~
	~~D.~~	~~ASH FUSION RANGE (Under reducing atmosphere)~~					
	~~a)~~	~~Initial Deformation Temperature (IDT)~~	~~°C~~	~~1100~~	~~1100~~	~~1100~~	~~1150-1100~~
	~~b)~~	~~Hemispherical temperature~~	~~°C~~	~~1300~~	~~1250~~	~~1350~~	~~1400-1250~~
	~~c)~~	~~Flow temperature~~	~~°C~~	~~1400~~	~~1400~~	~~1400~~	~~1400-1400~~

CLAUSE NO.	PROJECT INFORMATION				
	TABLE – 2A				
	FUEL OIL CHARACTERISTICS				
	Sl. No.	Characteristics	Heavy Furnace Oil grade HV (HFO) IS-1593-1982	Low Sulphur Heavy Stock (LSHS) IS-11489-1985	Heavy Petroleum stock (HPS) IS-11489-1985
	1.	Total sulphur content	4.5% Max.	1.0% Max.	4.5% Max.
	2.	Gross calorific value (KCal/kg)	of the order of 10,000	of the order of 10,000	of the order of 10,000
	3.	Flash Point (Min)	66 deg C	76 deg C	66 deg C
	4.	Water content by volume (Max)	1.0%	1.0%	1.0%
	5.	Sediment by weight (Max)	0.25%	0.25%	0.25%
	6.	Asphaltene content by weight (Max.)	2.5%	2.5%	2.5%
	7.	Kinematic viscosity in Centistokes	370 at 50deg C	100 at 100deg C	100 at 100deg C
	8.	Ash Content by weight (Max.)	0.1%	0.1%	0.1%
	9.	Acidity (inorganic)	Nil	Nil	Nil
	10.	Pour Point (Max.)	57 deg C	66 deg C	72 deg C
	11.	Sodium content	—	—	100 ppm
	12.	Vanadium content	25 ppm	25ppm	25 ppm
13.	Specific heat below pour point (KCal/Kg °C)		0.65		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 27 - OF 31	


CLAUSE NO.	PROJECT INFORMATION																										
	TABLE – 2B LIGHT DIESEL OIL CHARACTERISTICS AS PER IS 1460-2000 <table><thead><tr><th>Characteristics</th><th>LDO</th></tr></thead><tbody><tr><td>1. Pour Point (max)</td><td>21 deg.C & 12°C for Summer and Winter respectively</td></tr><tr><td>2. Kinematic viscosity in centistokes at 40 deg.C</td><td>2.5 to 15.7</td></tr><tr><td>3. Sediment percent by mass (max)</td><td>0.10</td></tr><tr><td>4. Total sulphur percent by mass (max)</td><td>1.8</td></tr><tr><td>5. Ash percentage by mass (max)</td><td>0.02</td></tr><tr><td>6. Carbon residue (Rans bottom) percent by pass (max.)</td><td>1.50</td></tr><tr><td>7. Acidity in organic</td><td>Nil</td></tr><tr><td>8. Flash point(Min.) - Pensky Martens</td><td>66 deg.C</td></tr><tr><td>9. Copper strip corrosion for 3 hours at 100°C</td><td>Not worse than No. 2</td></tr><tr><td>10. Water content, % by volume(max)</td><td>0.25</td></tr><tr><td>11. GCV (Kcal/kg)</td><td>10,000</td></tr></tbody></table>			Characteristics	LDO	1. Pour Point (max)	21 deg.C & 12°C for Summer and Winter respectively	2. Kinematic viscosity in centistokes at 40 deg.C	2.5 to 15.7	3. Sediment percent by mass (max)	0.10	4. Total sulphur percent by mass (max)	1.8	5. Ash percentage by mass (max)	0.02	6. Carbon residue (Rans bottom) percent by pass (max.)	1.50	7. Acidity in organic	Nil	8. Flash point(Min.) - Pensky Martens	66 deg.C	9. Copper strip corrosion for 3 hours at 100°C	Not worse than No. 2	10. Water content, % by volume(max)	0.25	11. GCV (Kcal/kg)	10,000
	Characteristics	LDO																									
	1. Pour Point (max)	21 deg.C & 12°C for Summer and Winter respectively																									
	2. Kinematic viscosity in centistokes at 40 deg.C	2.5 to 15.7																									
	3. Sediment percent by mass (max)	0.10																									
	4. Total sulphur percent by mass (max)	1.8																									
	5. Ash percentage by mass (max)	0.02																									
	6. Carbon residue (Rans bottom) percent by pass (max.)	1.50																									
	7. Acidity in organic	Nil																									
	8. Flash point(Min.) - Pensky Martens	66 deg.C																									
	9. Copper strip corrosion for 3 hours at 100°C	Not worse than No. 2																									
	10. Water content, % by volume(max)	0.25																									
	11. GCV (Kcal/kg)	10,000																									
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 28 - OF 31																								

CLAUSE NO.	PROJECT INFORMATION																																																																													
	Table-3 <table><tr><th>S.No</th><th>Constituent</th><th>As</th><th>mg/l (except pH & turbidity)</th></tr><tr><td>1.</td><td>Calcium</td><td>CaCO₃</td><td>131</td></tr><tr><td>2.</td><td>Magnesium</td><td>CaCO₃</td><td>52</td></tr><tr><td>3.</td><td>Sodium + Potassium</td><td>CaCO₃</td><td>65</td></tr><tr><td>4.</td><td>Total Cations</td><td>CaCO₃</td><td>248</td></tr><tr><td>5.</td><td>Chloride</td><td>CaCO₃</td><td>20</td></tr><tr><td>6.</td><td>Sulphate</td><td>CaCO₃</td><td>93</td></tr><tr><td>7.</td><td>Nitrate</td><td>CaCO₃</td><td>10</td></tr><tr><td>8.</td><td>Alkalinity</td><td>CaCO₃</td><td>125</td></tr><tr><td>9.</td><td>Total Anions</td><td>CaCO₃</td><td>248</td></tr><tr><td>10.</td><td>Iron(total)</td><td>Fe</td><td>0.3</td></tr><tr><td>11.</td><td>Total Silica</td><td>SiO₂</td><td>22</td></tr><tr><td>12.</td><td>pH value</td><td>---</td><td>7.0-8.2</td></tr><tr><td>13.</td><td>Turbidity</td><td>NTU</td><td>10</td></tr></table> Note: Clarified water is used for CW system as make up & the CW system is expected to operate at about 5.0 – 5.5 Cycles of Concentration (COC) with suitable chemical treatment program using acid, scale & corrosion inhibitor dosing. As CW blow down water is tapped from CW system, the water quality of CW blow down shall accordingly be arrived by the bidder. Table-4 ANALYSIS OF DM WATER TO BE USED FOR MAKE-UP WATER TO CONDENSER <table><tr><th>Sl.No.</th><th>Characteristics</th><th>Value</th></tr><tr><td>1.</td><td>Silica (Max.)</td><td>0.02 ppm as Sio2</td></tr><tr><td>2.</td><td>Iron as Fe</td><td>Nil</td></tr><tr><td>3.</td><td>Total hardness</td><td>Nil</td></tr><tr><td>4.</td><td>pH value</td><td>6.8 -7.2</td></tr><tr><td>5.</td><td>Conductivity</td><td>Not more than 0.1 micro mhos/cm excluding the effects of free CO2</td></tr></table>				S.No	Constituent	As	mg/l (except pH & turbidity)	1.	Calcium	CaCO ₃	131	2.	Magnesium	CaCO ₃	52	3.	Sodium + Potassium	CaCO ₃	65	4.	Total Cations	CaCO ₃	248	5.	Chloride	CaCO ₃	20	6.	Sulphate	CaCO ₃	93	7.	Nitrate	CaCO ₃	10	8.	Alkalinity	CaCO ₃	125	9.	Total Anions	CaCO ₃	248	10.	Iron(total)	Fe	0.3	11.	Total Silica	SiO ₂	22	12.	pH value	---	7.0-8.2	13.	Turbidity	NTU	10	Sl.No.	Characteristics	Value	1.	Silica (Max.)	0.02 ppm as Sio2	2.	Iron as Fe	Nil	3.	Total hardness	Nil	4.	pH value	6.8 -7.2	5.	Conductivity	Not more than 0.1 micro mhos/cm excluding the effects of free CO2
	S.No	Constituent	As	mg/l (except pH & turbidity)																																																																										
	1.	Calcium	CaCO ₃	131																																																																										
	2.	Magnesium	CaCO ₃	52																																																																										
	3.	Sodium + Potassium	CaCO ₃	65																																																																										
	4.	Total Cations	CaCO ₃	248																																																																										
	5.	Chloride	CaCO ₃	20																																																																										
	6.	Sulphate	CaCO ₃	93																																																																										
	7.	Nitrate	CaCO ₃	10																																																																										
	8.	Alkalinity	CaCO ₃	125																																																																										
	9.	Total Anions	CaCO ₃	248																																																																										
	10.	Iron(total)	Fe	0.3																																																																										
	11.	Total Silica	SiO ₂	22																																																																										
	12.	pH value	---	7.0-8.2																																																																										
	13.	Turbidity	NTU	10																																																																										
Sl.No.	Characteristics	Value																																																																												
1.	Silica (Max.)	0.02 ppm as Sio2																																																																												
2.	Iron as Fe	Nil																																																																												
3.	Total hardness	Nil																																																																												
4.	pH value	6.8 -7.2																																																																												
5.	Conductivity	Not more than 0.1 micro mhos/cm excluding the effects of free CO2																																																																												
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 29 - OF 31																																																																										

CLAUSE NO.	PROJECT INFORMATION			
9.00.00	STEAM GENERATOR DATA			Table-5
	1.	Location	Outdoor	
	2.	Operation	Base load	
	3.	Type	Pulverised coal fired	
	4.	Maximum Continuous Rating	2120 Tons/hr.	
	5.	Steam pressure at SH outlet	255 Kg/cm ² (a)	
	6.	Steam temperature at SH outlet	568°C	
	7.	Oil for start-up and flame stabilisation	HFO/LSHS/HPS/LDO	
	8.	Fuel oil system sizing	30% of Boiler MCR for Heavy oil/LSHS/HPS (7.5% BMCR for LDO)	
	9.	Pulverised coal size	Minimum 70% through 200 Mesh and 99% thru 50 mesh	
	10.	Type of pulveriser	Vertical spindle mills	
	11.	Type of oil burners	Steam atomised, (Air atomised for LDO)	
	12.	No. of air heaters	Two Bisector(2) for the secondary air side & Two Bisector(2) for the primary air side	
	13.	No. of ID Fans	Two (both working)	
10.00.00	ESP DATA			
	1.	Location:	Downstream side of Air preheaters	
	2.	Operation:	Base load	
	3.	Type:	Rigid Discharge frame	
	4.	Rapping:	Intermittent	
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2	SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)	PAGE - 30 - OF 31

CLAUSE NO.	PROJECT INFORMATION																																																																											
	Table-6 List of Drawings placed below in this sub section: <table><tr><th>Sl.No.</th><th colspan="3">Drawing Description</th><th colspan="3">Drawing No.</th></tr><tr><td>1.</td><td colspan="3">General Layout Plan</td><td colspan="3">Enclosed</td></tr><tr><td>2.</td><td colspan="3">Equipment Layout Plan</td><td colspan="3">Enclosed</td></tr><tr><td>3.</td><td colspan="3">ID system-Elevation & Plan</td><td colspan="3">Enclosed</td></tr><tr><td>4.</td><td colspan="3">Pipe Cable Trestle Layout</td><td colspan="3">Enclosed</td></tr><tr><td>5.</td><td colspan="3">Pipe Cable Trestle Foundation</td><td colspan="3">Enclosed</td></tr><tr><td>6.</td><td colspan="6">Chimney foundation details</td></tr><tr><td></td><td></td><td>Chimney shell outer diameter at ground level (m)</td><td>Chimney foundation outer diameter (m)</td><td>Type of foundation</td><td>Level of Top of foundation (m)</td><td>Level of Bottom of foundation (m)</td></tr><tr><td></td><td>Unit #1</td><td>32</td><td>46.7</td><td>Raft supported on piles</td><td>RL(+) 120.20</td><td>RL(+) 115.95</td></tr><tr><td></td><td>Unit #2&3</td><td>34.5</td><td>51.22</td><td>Raft supported on piles</td><td>RL(+) 120.20</td><td>RL(+) 115.70</td></tr></table>						Sl.No.	Drawing Description			Drawing No.			1.	General Layout Plan			Enclosed			2.	Equipment Layout Plan			Enclosed			3.	ID system-Elevation & Plan			Enclosed			4.	Pipe Cable Trestle Layout			Enclosed			5.	Pipe Cable Trestle Foundation			Enclosed			6.	Chimney foundation details								Chimney shell outer diameter at ground level (m)	Chimney foundation outer diameter (m)	Type of foundation	Level of Top of foundation (m)	Level of Bottom of foundation (m)		Unit #1	32	46.7	Raft supported on piles	RL(+) 120.20	RL(+) 115.95		Unit #2&3	34.5	51.22	Raft supported on piles	RL(+) 120.20	RL(+) 115.70
Sl.No.	Drawing Description			Drawing No.																																																																								
1.	General Layout Plan			Enclosed																																																																								
2.	Equipment Layout Plan			Enclosed																																																																								
3.	ID system-Elevation & Plan			Enclosed																																																																								
4.	Pipe Cable Trestle Layout			Enclosed																																																																								
5.	Pipe Cable Trestle Foundation			Enclosed																																																																								
6.	Chimney foundation details																																																																											
		Chimney shell outer diameter at ground level (m)	Chimney foundation outer diameter (m)	Type of foundation	Level of Top of foundation (m)	Level of Bottom of foundation (m)																																																																						
	Unit #1	32	46.7	Raft supported on piles	RL(+) 120.20	RL(+) 115.95																																																																						
	Unit #2&3	34.5	51.22	Raft supported on piles	RL(+) 120.20	RL(+) 115.70																																																																						
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOC. NO.:CS-0011-109(1A)-2		SUB SECTION-II-A8 PROJECT INFORMATION NABINAGAR STPP-I (3X660MW)		PAGE - 31 - OF 31																																																																						

TYPE OF SAMPLES	DEPTH BELOW NGL (m)	SUB SOIL PROFILE	The Designers' Consortium	SOIL PROFILE	NTPC LTD.	Geotechnical Investigation for New Nabinagar STPP (4x660MW)	COORDINATE 600N 2510E Elev. 120.213	Depth of Boring (m) 35.0	DATE from 28/6/2009 to 2/7/2009	WATER TABLE (m) NIL			LOCATION BH-23	SHEET 54	ANNEX. 'A'			
							GRAIN SIZE DISTRIBUTION	ATTERBERGS' LIMIT	DENSITY (gm/cm ³)	NATURAL MOISTURE CONTENTS (%)	SPECIFIC GRAVITY	FREE SWELLING	RELATIVE DENSITY	COHESION C (kg/cm ²)	FRICTION ANGLE ϕ	CONSOLIDATION PARAMTR. VOID RATIO e_0 COMPRESSION INDEX C_c	SWELLING PRESSURE (kg/cm ²)	
							GRAVEL (%)	SAND (%)	SILT (%)	CLAY (%)	LIQUID LIMIT	PLASTIC LIMIT	PLASTIC INDEX	SHRINKAGE LIMIT	BULK DENSITY	DRY DENSITY		
							PLOT OF SPT 'N' VALUES											
							Recorded	x	x	x	x	o	o	o	o	o		
							SPT 'N' VALUES	20	40	60	80							
							Corrected											
UDS	1.0	Dark grey silty clay with kankar of high plasticity (CH)					18											
SPT	2.0																	
SPT	3.0																	
SPT	5.0	Dark grey silty clay with kankar of medium plasticity (CI)					22											
UDS	6.0																	
SPT	7.0																	
SPT	8.0																	
SPT	9.0																	
UDS	10.0																	
SPT	11.0																	
SPT	12.0																	
UDS	13.0																	
SPT	14.0																	
SPT	15.0																	

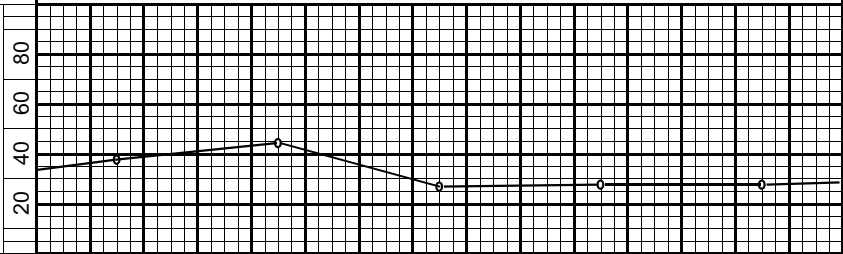TYPE OF SAMPLES	DEPTH BELOW NGL (m)	SUB SOIL PROFILE	SOIL DESCRIPTION AND ITS CLASSIFICATION	SPT 'N' VALUES	PLOT OF SPT 'N' VALUES Recorded x x x x Corrected o o o o	GRAIN SIZE DISTRIBUTION	ATTERBERGS' LIMIT	DENSITY (gm/cm ³)	NATURAL MOISTURE CONTENTS (%)	SPECIFIC GRAVITY	FREE SWELLING	RELATIVE DENSITY	SHEAR PARA - METER		VOID RATIO e ₀	COMPRESSION INDEX C _p	SWELLING PRESSURE (kg/cm ²)	ANNEX. 'A'
													COHESION C (kg/cm ²)	FRICITION ANGLE ϕ				
UDS	16.0	Dark grey silty clay with kankar of medium plasticity (CI)		38		GRAVEL (%) SAND (%) SILT (%) CLAY (%)	LIQUID LIMIT PLASTIC LIMIT PLASTIC INDEX SHRINKAGE LIMIT	BULK DENSITY DRY DENSITY	NATURAL MOISTURE CONTENTS (%)	SPECIFIC GRAVITY	FREE SWELLING	RELATIVE DENSITY	COHESION C (kg/cm ²)	FRICITION ANGLE ϕ	VOID RATIO e ₀	COMPRESSION INDEX C _p	SWELLING PRESSURE (kg/cm ²)	ANNEX. 'A'
SPT	17.0			44														
SPT	18.0			48/27														
UDS	19.0			55/28														
SPT	20.0			59/28														
SPT	21.0	Brownish poorly graded medium to coarse sand (SP)				GRAVEL (%) SAND (%) SILT (%) CLAY (%)	LIQUID LIMIT PLASTIC LIMIT PLASTIC INDEX SHRINKAGE LIMIT	BULK DENSITY DRY DENSITY	NATURAL MOISTURE CONTENTS (%)	SPECIFIC GRAVITY	FREE SWELLING	RELATIVE DENSITY	COHESION C (kg/cm ²)	FRICITION ANGLE ϕ	VOID RATIO e ₀	COMPRESSION INDEX C _p	SWELLING PRESSURE (kg/cm ²)	ANNEX. 'A'
UDS	22.0																	
SPT	23.0																	
UDS	24.0																	
SPT	25.0																	
SPT	26.0																	
UDS	27.0																	
SPT	28.0																	
SPT	29.0																	
SPT	30.0																	

TYPE OF SAMPLES	The Designers' Consortium		SOIL PROFILE	NTPC LTD.	Geotechnical Investigation for New Nabinagar STPP (4x660MW)		COORDINATE		Depth of Boring (m)	DATE		WATER TABLE			LOCATION	SHEET	ANNEX.									
	DEPTH BELOW NGL (m)		SUB SOIL PROFILE	SOIL DESCRIPTION AND ITS CLASSIFICATION	SPT 'N' VALUES	PLOT OF SPT 'N' VALUES				GRAIN SIZE DISTRIBUTION	ATTERBERGS' LIMIT				DENSITY (gm/cm ³)	NATURAL MOISTURE CONTENTS (%)	SPECIFIC GRAVITY	FREE SWELLING	RELATIVE DENSITY	COHESION C (kg/cm ²)	FRICITION ANGLE ϕ	SHEAR PARA - METER	CONSOLIDATION PARAMTR.	VOID RATIO e_0	COMPRESSION INDEX C_c	SWELLING PRESSURE (kg/cm ²)
Recorded	x	x	x			o	o	o	o		20	40	60	80												
UDS	1.0	3.5	Dark grey silty clay with kankar of high plasticity (CH)	22		7	13	65	15	43	24	19	12	BULK DENSITY	DRY DENSITY	37	0.30	13								
SPT	2.0			24																						
SPT	3.0			30																						
SPT	4.0	Dark grey silty clay with kankar of medium plasticity (CI)	33																							
UDS	5.0		36																							
SPT	6.0																									
UDS	7.0																									
SPT	8.0																									
SPT	9.0																									
UDS	10.0																									
SPT	11.0																									
SPT	12.0																									
UDS	13.0																									
SPT	14.0																									
SPT	15.0																									

TYPE OF SAMPLES	The Designers' Consortium	SOIL PROFILE	NTPC LTD.	Geotechnical Investigation for New Nabinagar STPP (4x660MW)		COORDINATE 850N 1965E Elev. 120.246	Depth of Boring (m) 30.0	DATE from 30/6/2009 to 5/7/2009	WATER TABLE (m) NIL		LOCATION BH-26	SHEET 61	ANNEX. 'A'																			
				DEPTH BELOW NGL (m)	SUB SOIL PROFILE				GRAIN SIZE DISTRIBUTION	ATTERBERGS' LIMIT				DENSITY (gm/cm ³)	NATURAL MOISTURE CONTENTS (%)	SPECIFIC GRAVITY	FREE SWELLING(%)	RELATIVE DENSITY	COHESION C (kg/cm ²)	FRICTION ANGLE ϕ	CONSOLIDATION PARAMTR. VOID RATIO e_0 COMPRESSION INDEX C_c	SWELLING PRESSURE (kg/cm ²)										
UDS SPT SPT SPT UDS SPT SPT SPT UDS SPT SPT UDS SPT SPT UDS SPT SPT UDS SPT	Dark grey silty clay with kankar of high plasticity (CH)	4.0	Dark grey silty clay with kankar of medium plasticity (CI)	18	27	31	33	35	5	17	71	7	41	22	19	9	1.80	1.58	13.9	2.67	45	0.60	0	0.69	0.128	0.2						
																											1.0 2.0 3.0	Recorded x x x x o Corrected o o o o	20	40	60	80

TYPE OF SAMPLES	DEPTH BELOW NGL (m)	SUB SOIL PROFILE	SOIL PROFILE	NTPC LTD.	Geotechnical Investigation for New Nabinagar STPP (4x660MW)	COORDINATE 850N 1965E Elev. 120.246	Depth of Boring (m) 30.0	DATE from 30/6/2009 to 5/7/2009	WATER TABLE				LOCATION BH-26	SHEET 62	ANNEX. 'A'																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
									GRAIN SIZE DISTRIBUTION	ATTERBERGS' LIMIT	DENSITY (gm/cm ³)	CONTENTS (%)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																



NOTES:—

1. THE EQUIPMENT SHALL BE GENERALLY IN ACCORDANCE WITH THE LAYOUT AND DIMENSIONS REQUIREMENTS INDICATED IN THESE DRAWINGS. HOWEVER BUILDING SIZES INDICATED ARE TO BE USED AS A GUIDE ONLY. THE DIMENSIONS INDICATED ARE PER FUNCTIONAL REQUIREMENT BUT NOT LESS THAN THOSE INDICATED IN THESE DRAWINGS.
2. NO PIPES, CABLES, STRUCTURES ARE TO BE PLACED BELOW 7.0M (BSP, BCC OR BCS) IN THE MAIN PLANT ROOM. THE MAIN PLANT ROOM SHALL BE LOCATED IN MAIN PLANT ROOM AND FIRST FLOOR BUILDING COLUMNS (i.e. C BAY) EXCEPT IN CONTROL TOWER AREA.
3. LOCATION OF GROSS/REACHABLE COVERS SHOWN IN THE DRAWINGS ARE INDICATIVE AND SHALL BE FINALISED DURING DETAILED ENGINEERING.
4. ALL DIMENSIONS ARE IN MM'S AND LEVELS ARE IN METRES.
5. FIRE BARRIER WALL IS PROVIDED ON A-ROW BETWEEN AXIS NO. 2-8,14-20 & 26-32.
6. ALL ELEVATIONS INDICATED IN THE DRG ARE ± 0.1 TO BUILDING GROUND FLOOR ELEVATION AS ± 0.000 .
7. i) FINISHED FLOOR OF PAVING SLAB IN BOILER/ESP/FO FAN AREA SHALL BE ± 0.00 M.
ii) FINISHED FLOOR ELEVATION IN MILL BAY AT GROUND LEVEL SHALL BE ± 0.00 M.
iii) FINISHED FLOOR LEVEL IN X-FMR YARD SHALL BE $(-) 0.10$ M.
iv) FINISHED FLOOR LEVEL INSIDE CHIMNEY SHALL BE ± 0.00 M.
v) FINISHED FLOOR LEVEL IN MILL BAY AT GROUND LEVEL SHALL BE ± 0.00 M.
8. ALL CABLE SPREADER ROOMS TO BE PROVIDED WITH DRAINAGE ARRANGEMENT.
9. ALL CABLE SPREADER ROOMS TO BE PROVIDED WITH DRAINAGE ARRANGEMENT.
10. BOTTOM OF STEEL OF PIPE / CABLE RACK IN MILL BAY AREA SHALL BE MINIMUM EL. ± 1.70 M.
11. FOR FLY ASH HANDLING EITHER VACUUM PUMPS OR EXTRACTION AIR COMPRESSORS SHALL BE PROVIDED.
12. IN CASE OF VACUUM PUMPS FOR DRY ASH SYSTEM, THESE SHALL BE LOCATED BELOW ESP NEAR ITS 1ST FIELD AND THE SNGR. ROOM FOR THE SAME ALONG WITH TRANSFORMERS SHALL BE LOCATED IN ONE OF THE MAIN PLANT ROOM. IN CASE OF EXTRACTION AIR COMPRESSORS, THESE SHALL BE LOCATED IN MAIN PLANT ROOM. SNGR. ROOM SHALL BE LOCATED IN AIR AREA, ACROSS THE ROAD BEHIND CHIMNEY.
11. BRICK WALL REQUIREMENTS :
 - i) ALL STAIRCASES AT 'A' ROW & 'C' ROW SHALL BE PROVIDED WITH 230 mm THICK BRICK ENCLOSURE.
 - ii) ALL CABLE SPREADER ROOM WALLS.
 - iii) WALLS OF SNRG ROOM.
 - iv) H/T/LT SWITCH GEAR ROOMS, BOILER MCC ROOM.
 - v) AIR HANDLING UNITS(AHU).
 - vi) OIL EQUIPMENT ROOM .
12. RCC WALL : 250 mm THICK RCC WALL FROM EL.0.0 TO 0.6M FOR LUBE OIL ROOM.
13. D-ROW IS THE FIRST ROW OF BOILER AND MILL BAY COLUMNS.
14. MAIN WATER PIPES SHALL BE ROUTED INSIDE THE COLUMN DEPTH IN ELECTRICAL BAYS AND P BUSDUCT BAY.
15. EL. 0.0M CORRESPONDS TO RL (+) 121.7 M.
16. NO VERTICAL DRAWING IN ELECTRICAL BAY AND LP. BUS DUCT BAY SHALL BE INDICATIVE ONLY.
17. GP TENSER BRACING IS TO BE RETIRED FIRE ALARMED SPACE FOR FGD SYSTEM.

OR FGD TENDER PURPOSE ONLY



एन टी सी लिमिटेड
NTPC Limited
 ENGINEERING DIVISION

NEW NABNAGAR SUPER THERMAL POWER PROJECT
 (3x660MW)

EQUIPMENT LAYOUT PLAN AT EL. 0.00M.

SHEET NO. 01 OF 01
 0370-999-POM-A-001
 (370-999-POM-A-001.dwg, 22-08-2017)
 0 1:1
 0 1:1
 0 1:1

[illegible]

SUB-SECTION-III-D

CIVIL WORKS

CLAUSE NO.	SCOPE OF SUPPLY & SERVICES			
1.05.00	Analysis, design and preparation of construction drawings for all structure/facilities under the scope of this package and getting the same approved from the owner.			
1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.			
2.00.00	CONSTRUCTION FACILITIES The following are also in the Bidder's scope of work: - Providing drinking and service water for Bidder's labour, staff and other personnel working for Bidder at the work site and in his staff/ labour colony. He shall install necessary bore wells with associated pumping or water tankers and treatment facilities to supply quality water as per standards. - Developing temporary staff colony and labour colony along with fencing etc. Land if required shall be arranged by the Bidder himself. However space required for bidder's office, storage, pre assembly and fabrication areas shall be provided by owner free of charge within the plant premises. The area to be allocated to the Bidder shall be discussed & finalized with the bidder after the award, keeping in view the availability of free space & similar requirement of other agencies. - Providing all arrangements for distribution of construction power at various locations as per his requirements from the supply point of Owner. - Providing all arrangements for the supply of construction water including bore-wells, water tankers etc. - Providing temporary construction office, construction stores (open / covered), workshops, material / field testing laboratory, any other temporary buildings - Providing all construction equipment, labour and materials. The Bidder shall provide all the tools and tackles required for the work. - Development of the pre-assembly and storage yard with fencing, drainage, internal roads, boulder soling, etc. - Approach road to project site is available. Further, Owner intends to construct the roads as per the layout shown in the General Layout plan in a progressive manner. Some of these roads may not be available to the bidder for his use. Similarly the drainage network for the plant site being constructed by the owner may not be available to full extent. The bidder shall plan his work within the plant area considering the above constraints of roads and drains. Access roads to his work sites, offices, stores, preassembly / fabrication yard, etc. as required for providing approach/access for men, materials, equipment, cranes, trailer, construction/erection activities etc., what so ever are required by the bidder, shall be constructed and maintained by the bidder. Bidder shall provide permanent access to all facilities/ structures from the nearby existing roads of the owner. Roads shall be in			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOCUMENT NO.: CS-0011-109(1A)2	SUB-SECTION-III-D CIVIL WORKS	PAGE 2 OF 4

CLAUSE NO.	SCOPE OF SUPPLY & SERVICES			
	concrete (M-35 grade) as per IRC standards, with minimum thickness of pavement (PQC) as 250mm. Width of all such roads shall be 7.5M concrete pavement. 9. Area lighting at the construction / erection site, pre-assembly and storage yard, office areas and labour / staff colony. 10. Providing all necessary fire-fighting devices / equipment / fire tender etc. required during the project execution stage. He shall maintain all such equipment / devices in proper working conditions throughout the period of work. 11. Providing first aid facilities at the construction / erection sites, workshops, laboratories, pre-assembly and storage yard and other places of work as per the requirement. 12. The Bidder shall arrange skilled / semiskilled / unskilled manpower from local source(s) as far as available in this country. He shall also arrange supervisory staff for quality execution of all works in his scope. 13. Bidder's office, store, workshop, laboratory or any other temporary buildings: The Bidder shall adopt pre-engineered/ pre-fabricated constructions made of steel with single / double skin, insulated for un-insulated roof and wall coverings (fabricated out of permanently color coated metal sheets) for his site office, covered store workshop, laboratory or any other temporary buildings. Alternatively, bidder can adopt readymade 'Portacabin' or similar construction. Bidder shall ensure that all such constructions are well-engineered, neatly constructed and overall present a pleasing look. The above requirements shall be applicable to his sub-vendors also and bidder shall be responsible for enforcing the same on his sub-vendors. Any other type of construction if proposed by the bidder shall be subject to approval of the owner. However, such construction shall be based on proper design and shall have aesthetic look. 14. Use of ash and ash based products: In line with Gazette Notification on Ash Utilization issued by MOEF and its amendment thereafter, Bidder shall use ash and ash based products in construction of his offices, stores, staff quarters and labour huts etc. He shall furnish a compliance report along with all details of use of ash and ash based products along with each bill. The above requirements shall be applicable to his sub-vendors also and Bidder shall be responsible for enforcing the same on his sub-vendors. 15. Repair & Maintenance Facilities by the Bidder: Bidder shall establish/set up at site suitable repair facilities for construction plant, equipment and machinery (like cranes, hydra, forklifts, welding equipments, etc.) He will also make arrangements/tie up with manufacturers/ suppliers of such construction plant, equipment & machinery, for periodic overhaul/maintenance and for major breakdown, if any. He shall also keep			
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOCUMENT NO.: CS-0011-109(1A)2	SUB-SECTION-III-D CIVIL WORKS	PAGE 3 OF 4

CLAUSE NO.	SCOPE OF SUPPLY & SERVICES 		
	adequate stock of spares at site for various construction plant, equipment and machinery to meet day to day requirements as recommended by the equipment manufacturer/suppliers or as instructed by the Engineer. Bidder shall deploy dedicated qualified, full time mechanical/electrical foreman/supervisors for manning the repair facilities as specified above.		
LOT-IA PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-A BID DOCUMENT NO.: CS-0011-109(1A)2	SUB-SECTION-III-D CIVIL WORKS	PAGE 4 OF 4

SUB-SECTION-IV-D

CIVIL WORKS

CLAUSE NO.	TECHNICAL REQUIREMENTS				
1.00.00	GENERAL				
1.01.00	This section of the bidding document deals mainly with the technical specification for the design and preparation of detailed drawings, getting the design and drawings approved by the Employer, fabrication, erection and construction of the necessary civil, structural and architectural works associated with the FGD package for Lot-1A. The work shall have to be carried out both below and above ground level and shall be involving, basements, equipment foundations, slabs, beams, columns, footings, rafts, walls, steel frames, brick walls, stairs, trenches, pits, access roads, culverts, trestles, silos, sumps, Limestone storage hopper & shed, Crusher House, Transfer points, Conveyor Galleries, Tunnels, Gypsum storage shed, Chimney, Gypsum dewatering building, Ball Mill building, FGD control room building, Tank Foundations, absorber tower foundation, transformer foundation, MCC Building, finishes, complete architectural aspects, drainage, sanitation, water supply (from terminal points to various buildings/facilities) and all other civil, structural and architectural works associated with the complete FGD package.				
1.02.00	The specifications are intended for the general description of the work, quality and workmanship. The specifications are not, however, intended to cover minutest details and the work shall be executed according to the relevant latest Indian Standard Codes / I. R. S. / I. R. C. specifications. In absence of the above, the work shall be executed according to the best prevailing local Public Works Department practices or to the recommendations of relevant American and British Standards or to the instructions of the Engineer. Some of the relevent I. S. Codes to be followed is mentioned in the Technical Specifications. The Contractor is expected to get clarified on any doubts about the specifications, etc. before bidding, in writing with the Employer in respect of interpretation of any portions of this document.				
1.03.00	Bidder or his agencies engaged as detailer for fabrication drawings should have the experience of detailing for power plant structures or steel plant or Industrial structures like Petro/ Chemical/ Refinery/ Cement/FGD Plant/Coal Handling Plant/Ash Handling Plant etc. The designer responsible for preparation of scope drawings shall review and approve the fabrication drawings prepared by the detailer before releasing them for fabrication.				
2.00.00	~~Sub QR for Civil Works:~~ CLOUSE DELETED				
2.01.00	~~Bidder or its agency should have in past executed civil and structural works for 500 MW or higher capacity coal based/Lignite based power plant including earthwork in filling involving mechanical compaction and cutting in hard rock, foundations, Bulk material handling plant involving underground storage hopper and underground tunnels.~~				
2.02.00	~~Bidder can engage more than one agency, in case the Bidder itself is not able to meet the requirement at 2.01.00. The agency being engaged for a particular work should have in the past executed such works of 500 MW or higher capacity plant.~~				
<table><tr><td>LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE</td><td>TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2</td><td>SUB-SECTION-IV-D CIVIL WORKS</td><td>PAGE 1 OF 69</td></tr></table>		LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 1 OF 69
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 1 OF 69		

CLAUSE NO.	TECHNICAL REQUIREMENTS		
~~2.03.00~~	~~For Chimney, Bidder or its agency should have in the past built at least one (1) reinforced concrete chimney of minimum 100m height.~~		
~~2.04.00~~	~~In case Bidder or its agency do not meet the requirements at 2.01.00 and the Bidder proposes to engage agency (ies) for civil & structural works on work volume basis (except for Chimney), Bidder or its agency (ies) should have executed such works in the past and the annual rate of execution in the reference works should not be less than eighty percent (80%) of the asking rate of such works, (structural steel fabrication & erection, RCC, earthwork in filling involving mechanical compaction and cutting in hard rock, RCC in underground storage hopper and underground tunnels) for which it is being engaged.~~ ~~Successful Bidder shall finalize the agency (ies) for each work in consultation with Engineer in charge at site before engaging them.~~ ~~Design agency for Civil & Steel Structural Works:~~		
~~2.05.00~~	~~Bidder or its agency (ies) should have carried out the design and detailed engineering of following works:~~ ~~(i) Civil & Structural works associated with at least one bulk material handling plant for 500 MW or higher capacity coal based/Lignite based power plant.~~ ~~(ii) For Chimney, Bidder or its design agency (ies) should have carried out design & detailed engineering of at least one reinforced concrete chimney with steel flues, of minimum 100m height.~~ ~~(iii) Machine foundations such as Mill foundations/ Block foundations.~~		
~~2.06.00~~	~~Bidder can engage more than one agency (of repute), in case the Bidder itself is not able to meet the requirement at 2.05.00.~~ ~~The design agency (ies) proposed by the Bidder shall be subject to Employer's approval.~~		
~~3.00.00~~	~~Work Description~~		
~~3.01.00~~	~~Truck Hopper, Limestone Storage hopper and Underground Tunnel~~ ~~Truck Hopper shall consist of underground portion, which shall be of R. C. C. with structural steel shed covered with permanently Colour coated profiled steel sheets.~~ ~~Limestone storage hopper shall be of RCC with structural steel shed covered with permanently Colour coated profiled steel sheets.~~ ~~The structural arrangement to be adopted for the design and construction of Limestone Storage hopper shall essentially consist of R. C. C. frames spaced at approx. 3.0M centers with R. C. C. wall panels on the sides and R. C. C. raft at the bottom, fixed to the frames. Minimum thickness of R. C. C. raft at bottom shall be 600~~		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 2 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	mm. Minimum thickness of RCC side walls shall be 600 mm at bottom and 300 mm at top. The vertical and inclined portion of hopper shall be provided with 50 mm thick guniting (shotcreting). Details of shotcreting have been given elsewhere in this specification. Expansion joints shall be provided at a maximum distance of 40m. 600 mm wide water stop fabricated with 22G copper plate with bitumen board fillers and polysulphide sealing compound as specified elsewhere shall be used as expansion joint material. Floor shall be provided with cross slope not flatter than 1 in 50 towards side drains. Side drains shall be sloped towards sump where sump pumps as specified elsewhere, shall be provided. The slope of side drains shall not be flatter than 1 in 400. Side drains and sump shall have removable type steel grating cover. Water proofing / Damp proofing of under ground Truck hopper, Limestone Storage hopper, tunnels and underground (i. e. basement) portion of transfer houses shall be done by providing the following treatments: Chemical injection grouting for inner faces (details as specified elsewhere). Polymer modified cementitious coating on earth side face as per the following : (1) On the outer surface of walls, frames and roof slabs coming in contact with earth, polymer modified cementitious coating in two layers as specified and as per manufacturer's specifications shall be provided directly on the concrete surface. (2) 50 mm thick P. C. C. (1 : 2 : 4 with 10 mm nominal size stone aggregates) shall be provided under the raft i.e. over the lean concrete, followed by polymer modified cementitious coating in two layers (slurry mix application) as per manufacturer's specification. 50 mm thick P. C. C (1 : 2 : 4) with 10 mm nominal size stone aggregates shall then be laid over the polymer modified cementitious coating before laying the raft. Truck hopper and its gratings shall be designed for movement of front end loader/ bulldozer over them. Bull dozer weight shall be considered as about 35T. The gratings shall be built of min. 200x28mm thick flats in main direction and min.100mm x 20mm thick in secondary direction. No painting/galvanization shall be provided in gratings. However, two coats of Red oxide Primer to be provided immediately after fabrication. Plinth protection along with drains shall be provided along the Hopper complex. However, 5m wide paving shall also be provided around machinery hatches. Earth pressure to be considered for design shall be due to earth pressure at rest (Ko) condition only. Earth pressure due to surcharge intensity of Uniformly Distributed Load (U. D. L) of intensity 2 T / Sq. M. shall be considered in the design. A minimum safety factor of 1.2 against uplift due to ground water shall be ensured during execution and after execution, considering dead weight of the structure to be		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 3 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS				
3.02.00	0.9 times only, ground water table to be taken at adjoining formation level and soil wedge angle of not more than 15 degrees. Also, FOS against uplift, to be taken as 1.0, considering the dead wt. of structure and soil resting on side projections if any in the vertical plane. Inclined wedge action of soil shall not be considered in this case. Wherever, slope of tunnel exceeds 10°, R. C. C. steps shall be provided for the entire width of each walkway.				
	Overhead / Ground Conveyor Galleries and Trestles				
	Overhead conveyors shall be located in a suitably enclosed gallery of structural steel. The overhead gallery shall consist of two vertical latticed girders having rigid jointed portal frame at both ends. Cross beams at floor level supporting conveyor stringer beams shall be made of single rolled steel beam or single channel section (ISMB or ISMC) or plate girder. Horizontal bracings are to be provided at top & bottom plan of the gallery (latticed girders shall be braced together in plan at the top and bottom). Common end portal frame shall not be used for adjacent conveyor spans. Roof truss shall be provided at upper node points of latticed girders to form an enclosure. Contractor can also use tubular steel sections for roof truss only of conveyor galleries. The tubular steel section shall be of circular/rectangular/square shape. The circular steel tube shall conform to IS 1161 and rectangular/square steel sections shall conform to IS 4923. The steel structures using tubular sections shall be designed and fabricated as per IS 806 – “Code of Practice for use of steel tubes in general building construction.” and EN 1993-1-8:2005. The maximum span of overhead gallery shall be limited to 25 meters unless higher span is required due to site conditions, which shall be subject to approval of the Engineer. The gallery should as far as possible be erected as a box section keeping all the vertical and horizontal bracing tied in proper position. The gallery should be checked for all erection stresses that are likely to develop during handling and erection and if required, temporary strengthening of gallery members during erection shall be made.				
	Seal plates under the conveyor galleries shall be provided in such a way that complete gallery bottom shall form a leak proof floor.				
	The ground conveyors shall be located in suitably enclosed gallery of structural steel consisting of rigid portal frames spaced at regular intervals and suitably braced. Plinth protection along with drains shall be routed along the ground conveyors.				
For double stream conveyor gallery, two side and one central walkway of width 800 mm and 1100 mm respectively shall be provided. The width of two side walkways for single stream conveyor gallery shall be 800 mm and 1100 mm respectively. Both sides of central and side walkways shall be provided with pipe handrails all along the conveyor gallery. Hand railing should not be supported on conveyor supporting stringers. The walkways shall be chequered plate construction with anti - skid arrangement. The anti - skid arrangement will consist of welding of 10 mm square steel bars at a maximum spacing of 500 mm along the length of the gallery. Where the slope of walkway is more than 10°, chequered plate steps with nosing and toe guard shall be provided. The floor of conveyor gallery all along the gallery length, shall be provided with minimum 12 gauge thick seal plates and other drainage arrangements as specified elsewhere					
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2		SUB-SECTION-IV-D CIVIL WORKS	PAGE 4 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
	Conveyor gallery shall have permanently colour coated steel sheet covers on roof and both sides. However in roof, a panel of minimum 1.5 m x 1.5 m area at about 6.0 m center shall be provided with translucent sheets of polycarbonate material for natural lighting. A continuous slit opening of 500 mm shall be provided on both sides just below the roof sheeting. Adequate provision of windows shall be kept on both sides of conveyor gallery as appended in Mechanical Section (Belt conveyor system). Windows shall be provided with wire mesh as specified elsewhere in this specification. Cross - over with chequered plate platform and ladder for crossing over the conveyors shall be provided at approximately every 100 M intervals of conveyor. Crossover shall preferably be located over four-legged rigid trestle location. For railway tracks passing below overhead conveyor gallery and along conveyors, the railway clearances both underground as well as over ground shall have to be adhered to for design, execution and erection of foundations, trestles, galleries etc., so that movement of locomotives and wagons is not hampered in any way during execution and afterwards. However at the location where the overhead conveyor gallery crosses road / rail line, minimum clearance of 8.0m above the road crest / rail top shall be provided. For calculation of material load on moving conveyor, a multiplication factor 1.6 shall be used to take care of inertia force, casual over burden and impact factor etc. Thus material load per unit length of each moving conveyor shall be $1.6 \times \frac{\text{Rated capacity of conveyor system}}{\text{Conveyor Belt Speed}} \times F$ Where, F = 1700/1400 for lime & 1250/900 for gypsum It should be noted that for structural design, unit weight of lime shall be assumed as 1700 Kgs. / Cu. M. instead of 1400 Kgs. / Cu. M., unit weight of gypsum shall be assumed as 1250 Kgs. / Cu. M. instead of 900 Kgs. / Cu. M. considered for system sizing purpose. Conveyor Gallery structure shall be designed considering both conveyors operating simultaneously. Conveyor gallery and supporting trestles located between transfer houses / buildings shall be arranged in any one of the following ways. a) All gallery supporting trestles shall be four legged type only. One end of each gallery span shall be hinged to the supporting trestle and the other end shall be slide type. Slide type support shall be with P. T. F. E. bearings to allow both rotation & longitudinal movements.
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 5 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS				
3.03.00	b) In between transfer houses / buildings, four legged trestles shall be placed at a maximum interval of 90 metres. The arrangement shall be such so as to ensure that force in the longitudinal direction (i. e. along the conveyor length) of conveyor gallery of length not more than 90 m is transferred to any four legged trestle. In the space between each successive four legged trestles, two legged trestles shall be provided at regular intervals. The end supports resting on the four-legged trestle can have either ends hinged or one hinge and the other on slide type depending on the arrangements. Slide type support shall be with P. T. F. E. bearings to allow both rotation & longitudinal movements.				
	End of conveyor gallery which will be supported over transfer house, shall be so detailed that only vertical reaction is transferred from conveyor gallery and no horizontal force in longitudinal direction is transferred from conveyor gallery to transfer house structure and vice - versa.				
	For trestles and trestle foundations for conveyor galleries located adjacent to existing structures, over ground and under ground facilities, location and details of these trestles and foundations shall have to be decided such that there is no interference both underground as well as over ground with existing structures and facilities. Trestle columns / ground conveyor portal column base shall be kept 300 mm higher than the existing ground level.				
	Transfer Houses				
	The over ground portion of the transfer house shall be framed structure of structural steel work with permanently colour coated profiled steel sheet side cladding (from lowest working floor level till top) and R. C. C. floors comprising of RCC slab over profiled metal deck sheets (to be used as permanent shuttering) over structural beams. Shear anchor studs shall be provided through metal deck at regular interval on all top flange/flange plate of structural beams. However, the lower portion of side cladding, at ground, for a minimum height of 0.9 m above the finished floor level shall be one brick thick wall plastered on both side. In some areas like MCC floors etc., one brick thick wall cladding shall be provided. Brick wall cladding shall be supported on encased wall beams and suitably anchored to adjoining columns and beams. Contractor shall have option to use tubular steel sections for roof truss only. Vertical bracings shall be provided only on four sides along the periphery. Grade slab with 0.9m height one brick thick wall plastered on both side at periphery shall be provided for all transfer houses.				
	Adequate steel doors and windows for proper natural lighting and ventilation shall be provided. In addition to steel windows, panels of suitable size to suit the architectural treatment and made of translucent sheets of polycarbonate material shall also be provided on the side cladding for natural lighting.				
	The roof of Transfer points shall be provided with pre-fabricated insulated metal sandwich panels. Composition of Insulated Metal Sandwich Panels shall be as described elsewhere in the Technical Specification. Adequate slope shall be provided for quick drainage of rain water.				
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2		SUB-SECTION-IV-D CIVIL WORKS	PAGE 6 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
3.04.00	Crusher House The crusher house shall be framed structure of structural steel work with permanently colour coated profiled steel sheet side cladding. However, panels of suitable size to suit the architectural treatment and made of translucent sheets of polycarbonate material shall also be provided on the side cladding for natural lighting. The lower portion of side cladding, at ground, for a height of minimum 0.9m above the finished floor level shall be of one brick thick wall plastered on both faces. Floors shall be of R. C. C. slab over profiled metal deck sheets (to be used as permanent shuttering) over structural beams. Shear anchor studs shall be provided through metal deck at regular interval on all top flange/flange plate of structural beams. Within this building cubicles are to be provided for resting room of operators and these shall be constructed with one brick thick brickwork having both sides plastered and roof slab. Adequate steel doors and windows for natural lighting and ventilation shall be provided. Contractor shall have option to use tubular steel sections for roof truss only . Vertical bracings shall be provided only on four sides along the periphery. The roof of Crusher house shall be provided with pre-fabricated insulated metal sandwich panels. Composition of Insulated Metal Sandwich Panels shall be as described elsewhere in the Technical Specification. Adequate slope shall be provided for quick drainage of rain water. Crushers shall be supported on R. C. C. deck, which in turn will rest on suitable vibration isolation system consisting of springs and dampers. This R. C. C. deck shall be isolated from the floor. However, the vibration isolation system consisting of springs and dampers may rest on main building framework. Detailed specification of vibration isolation system including the unbalanced force, frequency and amplitude criteria and other design requirements are appended elsewhere in this specification 3.05.00 Control building, M. C. C. Buildings These shall be steel or RCC framed building with R. C. C. roof and floor. For steel framed building roof /floor shall comprise of RCC slab over profiled metal deck sheets (to be used as permanent shuttering only) over structural beams. Cladding shall be of brickwork/concrete blockwork with plastering on both sides. Roof shall be provided with roof water proofing treatment, as specified elsewhere in the Technical specification. Suitable arrangement shall be provided so as to prevent ingress of water into the cable trenches inside the building from cable entry locations. All air - conditioned areas, shall be provided with the suspended permanently colour coated aluminium false ceiling system (details specified elsewhere) with under deck insulation. Adequate aluminium doors and windows shall be provided for natural lighting, ventilation and view. All windows in air conditioned rooms shall have hermetically sealed double glazing. 3.06.00 Pent House These shall be of R. C. C. framed structures with columns, beams, slabs and foundations etc. Cladding shall be of brickwork with plastering on both sides. Roof
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 7 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
3.07.00 Gypsum Storage Shed 3.08.00 Toilets 3.09.00 Staircases, Gratings, Handrails	shall be provided with roof water proofing treatment as specified elsewhere. Adequate nos. of steel doors and windows shall be provided for natural lighting and ventilation. The Gypsum storage shed shall be RCC framed structure with structural steel work shed with permanently colour coated profiled steel sheet roof and side cladding, grade slab and RCC foundations etc. Roof shall be provided with troughed profile permanently colour coated sheet with adequate slope for quick drainage of rain water. Toilet with potable water line facilities shall be provided in each of the following locations: (a.) In all M. C. C. Rooms (b.) Control Building All floors of transfer points/crusher houses and other facility buildings shall be accessible through staircase. All staircases of Transfer points and crusher house shall be of steel. Cage ladders (min. 450mm wide) shall be provided for access to roof of penthouses, single storey mcc rooms & mumty. All Stairs shall be minimum 1200 mm wide, maximum rise should not be more than 180 mm and minimum tread with 250 mm. Numbers and arrangement (including enclosures etc.) of stair cases shall be such as to meet the fire safety requirement as per guide lines of statutory regulatory bodies. For steel staircases , Stringers shall be of rolled steel channel (minimum ISMC 250) and tread shall be of steel gratings. Out side stairs to transfer points/crusher house shall be open type. Minimum 50 x 50 x 6 mm size angles with lugs shall be provided as edge protection for treads of stairs in underground TP's All gratings shall be electro forged types. Minimum thickness of the grating shall be 40 mm for indoor installation and 32 mm for outdoor installation. However, at entry or road crossing point's minimum thickness of grating shall be 40 mm The opening size shall not be more than 30mmx100mm. The minimum thickness of the main bearing bar shall be 6 mm or as per design requirement whichever is higher. All gratings shall be designed for minimum imposed load of 500Kgs. / Sq. M. If actual expected load is more than the specified load, then actual load is to be considered. All gratings shall be hot dip galvanized at the rate of 610 g. per sq.m. after surface preparation by means of blast cleaning/ acid pickling. Minimum 1000 mm high hand railing shall be provided around all openings, projections / balconies, walkways, platforms, Stairs, etc. All handrails and ladder Pipes shall be 32 mm nominal bore MS Pipes (medium class) as per IS:1161. Handrails shall have top and middle rails at a height of 1000 mm and 500 mm and the vertical post spacing shall not exceed 1.50 M, with provision of kick Plates (100
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2 SUB-SECTION-IV-D CIVIL WORKS PAGE 8 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
3.10.00	mm high and 6 mm thick). All handrails and ladders shall be galvanised at the rate of 610 Gms / Sq. M as per IS:4736. Trenches All trenches for cables or any other underground facility as detailed out elsewhere shall be of R. C. C. Cable trenches shall be provided with pre - cast R. C. C. covers / chequered plate cover. Cable trenches as well as pre - cast covers shall be provided with edge protection angles and lifting hooks. All embedments / block outs as required and specified elsewhere in these specifications shall be provided. Proper drainage arrangement shall be provided. Trench pre - cast cover weight shall not be more than 65 Kgs. Trench covers near entry or at road crossings shall be designed for 10 T wheel load at centre. Pre - cast covers shall be designed for central point load of 75 Kgs. R. C. C. cable trenches shall be filled with sand after erection of cables, up to top level and covered with pre - cast R. C. C. covers. For cable trenches outside buildings, top level shall be 200 mm above G. L and sand filling shall be overlaid with 50 thk. PCC. Minimum 50 x 50 x 6 mm size angles with lugs shall be provided as edge protection all around cut outs / openings in floor slabs, edges of drains supporting grating/precast RCC covers, edges of R. C. C. trenches supporting pre - cast covers, supported edges of pre - cast cover			
	3.11.00	Cable gallery/trestles Cable galleries/trestles shall be made of structural steel. The contractor can use either rolled sections or tubular steel sections. The tubular steel section shall be of circular/rectangular/square shape. The circular steel tube shall conform to IS:1161 and rectangular/square steel sections shall confirm to IS:4923. The steel structures using tubular sections shall be designed and fabricated as per IS:806 – “Code of Practice for use of steel tubes in general building construction.” and EN 1993-1-8:2005.		
3.12.00	Transformer Foundation			
3.12.01	Foundations of transformers shall be designed for seismic and wind loads in addition to other applicable loads. Block foundations shall be provided for the main transformer block. The oil soak pit, if provided, shall be filled with gravel of size 40mm. The volume of the soak pit shall be sufficient to store complete oil of the transformer/reactor along with 10 minutes of fire water considering only 40% of the volume as available voids between gravel filling. However, in case a separate oil collection tank is provided for the transformer/reactor, oil soak pit of volume equivalent to one-third (1/3) the oil volume of transformer/reactor shall be provided around transformer/reactor. The oil collection tank, in such cases, shall be designed for an effective capacity of complete oil of the transformer along with 10 minutes of fire water. The oil soak pit shall also be provided with a sump at the corner to allow drainage of water/oil from the soak pit. Arrangement for moving the transformer into place using rail cum road, jacking pads and pulling blocks including inserts, as required, shall be provided along with the transformer/ reactor foundations.			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 9 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
3.12.02	RCC Firewall shall also be provided between the transformers wherever required. 300 mm thick PCC M20 encasement all around the Pylon supports inside soak pit for fire fighting system shall be provided up to top of gravel filling. Coarse aggregate filling inside the transformer oil soak pit shall be carried out only after construction/erection of Pylon supports and PCC encasement.			
	Fencing Fencing with toe wall and steel gates shall be provided around the transformers. Fencing shall comprise of PVC coated GI chain link fencing of minimum 8G (including PVC coating) of mesh size 75 mm and of height 2.4 m above the toe wall. The diameter of the steel wire for chain link fence (excluding PVC coating) shall not be less than 12G. Fence posts shall be of pre – cast R. C. C. of minimum M20 grade. All corner posts will have two stay posts and every tenth post will have transverse stay post. Suitable R. C. C. foundation for the post and stays shall be provided based on prevailing soil conditions. Gates shall be sturdy with locking provisions. Toe walls of brick masonry shall be provided between fence posts all along the run of the fence with suitable foundation. Toe wall shall be minimum 200 mm above the formation level with 50 mm thick P. C. C. coping (1: 1. 5: 3) and shall extend minimum 300 mm below the formation level. Toe wall shall be plastered on both sides and painted with two coats of cement paint of approved colour and shade. Toe wall shall be provided with weep holes at suitable spacing			
	3.13.00 Booster Fan Foundation Booster Fan foundations shall be RCC block foundation directly resting on virgin soil/ pile below Ground level. The vertical faces of this block foundation shall be isolated from adjacent footings by providing minimum 100mm thick polystyrene board of type-1 conforming to IS: 4671 with density 20 Kg/cum sandwiched between the vertical face of block foundation and 230 thick brick wall all round.			
	3.14.00 ~~CHIMNEY~~ 3.14.01 Salient Features Single-flue ~~or multi-flue~~ chimney(s) shall be provided. Chimney shall be of reinforced concrete construction. There shall be one flue (liner) for each unit. The flue gas emission point shall be minimum 150 meters above the plant grade level. The chimney shell (windshield) shall be constructed using slip form shuttering. Internal platforms of steel structure shall be provided for enabling access to various elevations of the chimney and to provide support to the flue liners. Spacing of internal platforms shall not exceed 45.0 M. The platform beams shall be supported on concrete shell using suitable load bearing arrangement in the recesses provided for the purpose. The platform beams getting supported in the chimney shell shall have complete bearing support within the thickness of shell at that location and shall in no case be supported completely/partially on corbels/ brackets from the shell. "Through openings" in shell if provided to facilitate erection of platform beams shall be closed with cast-in-situ RCC closure wall on the external face of the shell. Necessary dowel			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 10 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	bars shall be provided in the shell during construction for this purpose. Openings in the concrete shell for flue duct entry, access door & truck entry door at ground level, air ventilation etc shall be provided. Hand railing shall be provided all around internal staircase & around the ventilation voids in the internal platform using min. 32 mm nominal bore MS pipes of medium class conforming to IS:1161. Spacing of railing posts shall not be more than 1500 mm centre to centre with a minimum height of 1200 mm. The handrail shall have three rows of horizontal members between the railing posts including the top member. Kick plate of min. size 100x6 thick shall be provided in the hand railing. The flue duct outside the chimney shall be suitably connected to the flue liner inside the chimney through a transition duct. The transition duct shall be bottom supported and shall be profiled into a circular shape to connect to the flue liner. The flue duct shall be so designed that no load is transferred on the chimney shell due to the duct. The interface between the flue liner and the transition ducting shall be provided with non-metallic fluoroelastomeric fabric expansion joint. The expansion joint in the flue liner shall comprise of non-metallic fluoroelastomeric material suitable to withstand a temperature of 300 Deg C, shall be acid resistant to withstand acidic flue gas condensates arising out of flue gas parameters & operating conditions as specified elsewhere in the specification and shall also prevent dust accumulation. The space between the expansion joint material and the liner shall be packed and sealed by providing a bolster made up of light weight compressible material suitable to withstand a temperature of 300 Deg C and acid resistant to withstand acidic flue gas condensates arising out of flue gas parameters & operating conditions as specified elsewhere in the specification. The bolster shall be confined in texturized glass fabric having a final covering of stainless steel wire mesh. Chimney roof shall be of RCC slab over a grid of structural steel beams and provided with rainwater drainage system. An internal structural steel staircase supported from chimney shell with chequered plate floor panels and pipe handrails, shall be provided for full height of the chimney and an internal cage ladder for a small height, over last staircase landing to access the chimney roof through a roof access hatch. The other components of the chimney include liner test ports (for continuous pollution monitoring), liner hatches, grade level slab of RCC with metallic hardener floor finish, acid resistant treatment on roof slab, a large electrically operated grill type roll-up door and personnel access metallic door at grade level, roof drain basin, rain water down comer pipe (150 mm diameter galvanized pipe), connection to plant drains, louvers with bird screens for ventilation and all other openings in the wind shield, mild steel wind strakes (if required), all finishing works, electrical power distribution boards, lighting panels, power & control cabling and wiring systems, stair and platforms lighting, socket outlet, lightning protection and grounding system, aviation obstruction lighting with photoelectric controller etc, communication system, a rack and pinion elevator and other items, though not specifically mentioned but reasonably implied and necessary to complete the job in all respects. Aviation Warning Lights (AWL) shall be mounted on door panel of required size (open able from interior of chimney shell) fixed to openings in the chimney shell at locations and levels specified elsewhere. Suitable provision for approach to the AWL shall be provided at the platform level. AWL shall be located at about 1-1.5 metre above the top of platform to enable easy handling for maintenance. The size of roll-up door shall be determined based on minimum requirement for ventilation and transportation & erection of flue segments.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 11 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
3.14.02	Design Concept			
	Design and construction of various components and systems of the chimney shall be in accordance with relevant Indian Standard and where provisions are not covered in Indian Standard, reference shall be made to ACI, BS, CICIND and other international standards. In case of any conflict between this document and the Indian and International Standards, the stipulations of this document shall prevail. Imposed loading for design of all chimney components shall not be less than 5 kN/Sq.m. An additional 25% of liner load shall be taken as impact loading for liner erection in addition to the liner load. The min. thickness of web for plate girders shall be kept as 12 mm. Seismic forces on the chimney system shall be determined based on site specific seismic information provided elsewhere in this document. Wind forces on the chimney system shall be determined based on site specific wind design criteria provided elsewhere in this document. The chimney and its components shall be designed to resist the most onerous forces resulting from all the possible combinations of the various loadings. Design of all chimney components shall be based on working stress method.			
3.14.03	Wind Shield			
	The wind shield shall be designed for vertical loading, cross wind loading, seismic loading, circumferential wind loading, thermal gradients etc. The load calculation and load combinations shall be as detailed in IS 4998 (Part 1) : 1992. The wind shield shall be analysed for cases with and without flue liner loads. Forces/stresses in the wind shield due to eccentricity effects of local (e.g. corbel) loadings, insulations effects, rotation of chimney foundations, construction tolerances and moments of second order shall also be considered. Seismic response of the chimney shall be computed by the response spectrum method. At least, the first five modes of vibrations shall be used for this analysis. The cross wind analysis of the chimney shall be carried out irrespective of the value of the Scruton Number for the chimney and other empirical considerations which suggest structural immunity to cross wind oscillations. The effect of the openings/cut-outs in the chimney shell shall be duly considered in the design of the windshield. The minimum thickness of shell shall not be less than 500mm. The stresses for the shell design shall not exceed the limits given in Cl. 7.0 of IS:4998 (PART-I) 1975 for various combinations of loads, excepting the stress in concrete for the case of dead load + wind load which shall not exceed $0.30f_{ck}$ where f_{ck} is the characteristic compressive strength of concrete. The minimum vertical reinforcement shall be 0.3% of the concrete area. The maximum spacing of the reinforcement bars shall not be more than 250 mm on each face. The minimum circumferential reinforcement shall be 0.2% of the concrete area. The maximum spacing of the reinforcement bars shall not be more than 200 mm on each face. The circumferential reinforcement in the top 3 meters of the windshield			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 12 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
3.14.06	the liner erection works. The platform shall be made up of chequered floor panels supported on grid of structural steel beams. All beams shall have bolted connections. The maximum permissible deflection in main steel girders supporting flue liner shall be span/1000.		
	Internal Staircase The staircase shall have a clear passage way width of not less than 800 mm and a clear headroom of not less than 2100 mm. The riser height shall not be more than 175 mm and tread width shall not be less than 225 mm.		
	3.14.07	Foundation The chimney foundation shall be designed for the most critical combination of forces and moments, resulting from all possible combinations of the various loadings from the chimney system during all stages of constructions. The effect of water table shall be considered and the foundation shall be checked for overturning for minimum and maximum vertical loads. There should be no uplift under any portion of the foundation for any loading condition. Since chimney is a wind sensitive structure no allowance shall be made in the load carrying capacity of the bearing strata / piles under any load case/combination with wind. No allowance shall be made in the stresses for design of foundation for wind loading. The foundation diameter to depth ratio shall be maintained to around 10 and should preferably not exceed 12. The diameter of the reinforcing bar for the main radial and tangential reinforcement for the foundation shall not be less than 25mm. The spacing of radial steel at the outer edge of the foundation shall not be more than 250mm. Grade of concrete for foundation shall be minimum M 25.	
3.14.08		Thermal insulation The insulation shall be semi-rigid, resin bonded type, in the form of slabs and shall conform to IS: 8183. Blanket type insulation shall not be used. The density of insulation shall not be less than 64 kg/cu.m for resin bonded glass wool insulation and 100 kg/cu.m for resin bonded rock wool. The coefficient of thermal conductivity of insulation shall not be more than 0.52mW/cm/oC at a mean temperature of 100oC. The insulation thickness shall be determined based on the maximum/minimum ambient temperature, surface air velocity worked out based on the draught of ventilation air in the annular space between the flue liner and chimney shell, insulation surface emissivity of 0.3 and the insulation cold face maximum temperature not exceeding 55 degree Celsius. The draught of air in the annular space shall be the natural draught created by the heating of air by the flue liner and the air being vented out through the openings in the chimney shell. The increase in the annulus air temperature due to the rising heated air shall be taken into account while calculating the insulation thickness. The insulation thickness shall not be less than 100 mm, in any case, and shall be provided in two layers with the second layer of insulation covering the joints of the first layer. The insulation shall be wrapped on the outer-most surface with galvanised wire mesh using MS galvanised pins and speed washer.	
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS PAGE 14 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
3.14.09	Chimney Painting (i) All exposed steel surfaces (including exterior surface of mild steel flue liner in case the design does not envisage provision of thermal insulation on the exterior surface of flue liner) except surfaces of steel wind strakes shall be painted as specified in corrosion protection clause of this specification. (ii) All exposed surfaces of steel wind strakes shall be painted with epoxy phenolic coating system having total 240 microns DFT. a) All steel surfaces shall be provided with two component epoxy primer coat (having solid by volume minimum 51% ±2%) of minimum 70 micron DFT to be applied over blast cleaned surface conforming to Sa 2½ finish of ISO 8501-1 with surface profile 40-60 Micron. The primer coat shall be applied in shop immediately after blast cleaning by airless spray technique. b) Primer coat shall be followed with the application of Intermediate coat of epoxy phenolic coating (solid by volume minimum 63%) of minimum 100 micron DFT. This coat shall be applied in shop after an interval of minimum 24 hours (from the application of primer coat) by airless spray technique. c) Intermediate coat shall be followed with the application of finish coat of two-pack aliphatic Isocyanate cured acrylic finish paint (solid by volume minimum 55% ±2%) with Gloss retention (SSPC Paint Spec No 36, ASTM D 4587, D 2244, D 523) of Level 2 (after minimum 1000 hours exposure, Gloss loss less than 30 and colour change less than 2.0 ΔE) and minimum 70 micron DFT. This coat shall be applied in shop after an interval of minimum 10 hours and within six (6) months (from the completion of Intermediate coat), Colour and shade of the coat shall be as approved by the Employer. (iii) All steel parts embedded in concrete like Strake embedment assembly including bolts, nuts, washers, pipe sleeves and insert plate shall be galvanized as per IS:4736. The minimum weight for galvanizing shall be 610 g/sq.m and shall comply with relevant IS Codes. (iv) The inside surface of chimney shell above roof, horizontal surface of shell at top, underside of concrete roof slab, external surface of mini-shell above roof etc shall be painted with epoxy phenolic coating system having total 220 microns DFT. a) All concrete surfaces shall be provided with two component transparent polyamide cured epoxy sealer coating (having solid by volume minimum 40% ±2%) of minimum 50 micron DFT to be applied over cleaned surface in multiple coats. Surface to be coated shall be absolutely dry, clean and dust free. b) Sealer coat shall be followed with the application of Intermediate coat of epoxy phenolic coating (solid by volume minimum 63%) of minimum 100 micron DFT. This coat shall be applied after an interval of minimum 24 hours (from the application of primer coat) by airless spray technique. c) Intermediate coat shall be followed with the application of finish coat of two-pack aliphatic Isocyanate cured acrylic finish paint (solid by volume minimum 55% ±2%) with Gloss retention (SSPC Paint Spec No 36, ASTM D 4587, D 2244, D 523) of Level 2 (after minimum 1000 hours		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 15 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
3.14.10	exposure, Gloss loss less than 30 and colour change less than 2.0 ΔE) and minimum 70 micron DFT. This coat shall be applied after an interval of minimum 10 hours and within six (6) months (from the completion of Intermediate coat), Colour and shade of the coat shall be as approved by the Employer. d) The entire external surface of chimney shell shall be painted with epoxy phenolic coating as specified in (iv) above in alternate bands of 'signal red' and 'bright white' colours.		
	Electrical System 415V, normal and emergency AC power supply for chimney shall be derived from main plant power supply system. Emergency supply shall feed 20% of platform lighting, 50% of staircase lighting, aviation obstruction lighting and elevator load. All other loads shall be connected on normal power supply. Ambient temperature for design of all equipment shall be considered as 55 deg. C which is likely to be encountered inside the chimney. The equipment shall be suitable for installation and render trouble free operation at higher ambient temperature and rigorous weather conditions prevailing at chimney. All equipment supplied shall comply with relevant IS Standards. The distribution boards of chimney shall comprise switch fuse units of appropriate ratings. Emergency board shall have two incomers, one from emergency supply and other from normal AC distribution board itself. Auto changeover scheme shall be provided in emergency board to enable changeover to healthy source on failure of any source. Dry type isolating transformer of Dyn connection shall be provided in emergency board to obtain neutral lead, in case 3 phase 3 wire emergency supply is derived from main plant. Various platforms shall be illuminated by dust tight HPSV well glass lighting fixtures. Average illuminations level of 150 lux shall be maintained on equipment and 70 lux on platforms & 100 lux on staircases (minimum 1 lighting fixture at each landing). Any additional fixture to take care of dark patches/shadows shall also be provided. Lighting system shall be controlled through MCB provided in lighting panel. A lighting and power panel each shall be located at grade level and at other in between levels as required. All distribution boards, aviation lighting controls, etc. shall be located at grade level only. At each platform, 1 No. 63A, 415V welding receptacle and 1 No. 20A, 240V receptacle shall be provided and shall be fed from power panel. Wiring installation for lighting fixture shall be of PVC insulated copper/aluminium wires through galvanised steel conduits. Aviation obstruction lighting system shall conform to the requirements of the latest rules and regulations of the International Civil Aviation Organization (ICAO), National Airports Authority (NAA) and Directorate of Air Routes and Aerodromes (DARA). The type of aviation obstruction lighting system shall be of medium intensity aviation obstruction lights having an effective intensity of 2000 to 20,000 cd depending upon back ground illuminance. Obstacle lights shall have a day time effective intensity of minimum 20000 cd. The intensity of lights shall be 20000 cd ± 25% at twilight and shall reduce automatically to a night time intensity of 2000 cd ± 25% through the use of photo-cell. The obstacle lights shall flash simultaneously at a rate between 20 to 60 per minute. A minimum of three levels will be provided with aviation obstruction		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 16 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	lights and there will be four light units per level. The lowest level should not be lower than 45 meters above the ground and vertical spacing of the intermediate levels could vary between 45 and 105 meters. The intermediate lights shall be spaced as equally as possible. Aviation obstruction lighting shall be complete with lights, photo cell, controller, special cables, etc.. A temporary aviation obstruction lighting system shall be provided during construction of the chimney. Cables from distribution board to lighting panels/power panels/receptacles shall be 1100V grade, multicore FRLS HR-PVC insulated, PVC inner sheathed, armoured, PVC outer sheathed stranded copper/ Aluminum laid on galvanised sheet steel cable trays. Cables shall be terminated using double compression type cable glands and solder less crimping type tinned copper cable lugs. Minimum size of the power cable shall not be less than 2.5 sq.mm copper or 4 sq.mm Aluminum. Minimum size of control cable shall not be less than 1.5 sq.mm. Lightning protection system shall comprise minimum 3 vertical air terminations for each flue liner, horizontal air terminations and minimum 4 Nos. of down conductors spaced 90 degrees apart routed all along chimney height on external surface and connected to the earthing system. Down conductors shall be of minimum 50x6 mm galvanized steel strip. Each down conductor shall be provided with a test link at 1 metre above ground level. Each test link shall be enclosed in a galvanised sheet steel enclosure. Above ground level earthing and lightning protection system shall comprise galvanised steel strips. These materials provided at top 12 meters shall have additional coating of 2 mm thick seamless lead cover and the accessories like nuts, bolts, washers etc. shall be of stainless steel to take care of corrosion. Chimney earthing system shall be interconnected to main plant earthing system. A temporary lightning protection & earthing system shall be provided during construction of the chimney till a permanent lightning protection & earthing system is installed. In no case reinforcement bars of Shell should be used as earthing Down Conductors Communication system comprising of telephone socket at every internal platform level and at grade level, necessary wiring installation, a telephone hand set, junction boxes etc. shall also be provided. Telephone cables shall be of minimum 0.6 mm diameter annealed high conductivity electro copper conductor, PVC insulated, twisted, PVC tape wrapped, screened, rip corded, PVC sheathed, conforming to relevant ITD (Indian Telephones Department) specifications. All equipment to be supplied shall be of type tested quality. The Contractor shall submit for Owner's approval the reports of all type tests as listed below: (A) Distribution boards/panels-Degree of protection tests (B) Aviation lights: (1) Intensity Test (2) Degree of protection test For various equipment, the technical requirements and practices shall conform to the relevant clauses of the main plant electrical specification.		
3.14.11	Rack and Pinion Elevator A rack and pinion elevator, with a load carrying capacity of 400 kg (min) (passenger cum goods), cabin floor size of 1100 mm x 1000 mm (min.) and an operating speed		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 17 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
4.00.00 4.01.00 4.02.00	of 40 m/min. (approx.), shall be provided for travel from the grade level to the top of the chimney. A landing platform shall be provided at all access/ platform levels. The elevator shall be of a proven and approved make. Enclosure shall be fabricated from tubular steel and expanded metal or wire mesh, 2.1 m high (Approx.). A Safety device comprising of an over speed governor in constant mesh with the rack by means of a flame hardened steel pinion shall be provided to protect the cab against over speed during the cab downward motion and the same shall actuate the brake mechanism and stop the down ward motion gradually. The lift shall be installed using anchor fasteners. The electrical requirement of the system shall conform to the main electrical specification. Drive motor shall be of S3 duty class with CDF of 25% and maximum number of 120 starts per hour in 55 degree Celsius ambient temperature. The motor shall be provided with internal 220V AC single phase space heaters or an alternate heating system. The elevator shall be supplied, installed, painted, tested, commissioned etc. complete with all mandatory spares (as specified in Part-F of this specification) and operation maintenance manual Drainage & Water Supply Works Drainage System: The drainage arrangements shall be so planned so as to ensure quick disposal of drainage water without stagnation and / or overflow. It is envisaged to clean the facility buildings etc. with water periodically. Minimum 4 nos. down comers shall be provided in each building at corners. For Conveyors, each down comer shall lead the water / slurry to pit (of 2 Cu.M capacity) to allow settling of lime/gypsum. The water from the pit shall overflow into contractor's R.C.C drain, which will lead the discharge finally into owner's drain routed alongside the nearby road. For Ball Mill building, Gypsum dewatering building, FGD control room building, peripheral drains (Brick drains with steel gratings provided around the building) shall lead the water / slurry to a local pit (of 2 Cu. M. capacity) near each facility to allow settling. The water from the pit shall overflow into contractor's R.C.C drain, and finally into owner's drain routed alongside the nearby road. In case of Control rooms and M. C. C. buildings Pump houses, etc, water / slurry coming from down comers shall discharge into peripheral drains (Brick drains with steel gratings provided around the building) which will lead the water / slurry into contractor's R.C.C drain, which will lead the discharge finally into owner's drain routed alongside the nearby road. Contractor's scope shall also include construction of necessary culverts under the rail lines / roads as per railway / I. R. C. standards and approval of Railway culverts from concern Railway authorities. Internal and external water supply, drainage etc. The scope for potable water supply includes all distribution systems, tanks, pipes, fittings etc. as required and as described here or elsewhere in the specifications.
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2 SUB-SECTION-IV-D CIVIL WORKS PAGE 18 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	The scope for service water supply and dust control water supply shall be as described elsewhere in the specifications. For water supply, medium class galvanized mild steel pipes conforming to IS: 1239 shall be used. All facility buildings shall be provided with open surface brick drains of minimum size of 300 mm width and 300 mm depth all around the periphery. All drains excepting the peripheral drains around facility building shall be of R. C. C. construction. Drains shall have removable steel grating cover and shall be provided with edge protection angles. The scope for foul water from toilets shall include layout and laying of sewers up to the Employer's main sewer line for sewerage system together with all fittings and fixtures and inclusive of ancillary works such as connections, manholes and inspection chambers within the building and from the building to the Employer's sewer line. For rain water down comer and those to be used for conveying water / slurry generated from cleaning of buildings floors, Galvanised MS pipes conforming to IS: 1239 (for 150 mm NB Medium grade pipes) with welded joints shall be used for MCC buildings, penthouse, control rooms, ball mill building, gypsum dewatering building, storage sheds. Galvanising shall be as per IS: 4736. The minimum mass of zinc coating shall not be less than 400 gms/sq.m. as per IS:6745. The zinc coating shall be smooth and shall be subjected to testing as per IS: 2633, for uniformity of coating. The zinc coating shall be free from all defects as per IS: 2629. All rain water down comers shall be provided with roof drain heads and complete with shoes bends, junctions, sockets, adapters, brackets and finished with anti corrosive painting over a coat or primer. For design of building drainage system IS: 1742 shall be followed. For sanitary / sewerage pipes above ground, sand cast iron pipes conforming to IS : 1729 with leak proof lead joints. For underground drain pipes, minimum class NP - 2 pipes conforming to IS: 458. At road crossings, concrete pipes of class NP 3 conforming to IS: 458 and at rail crossing R.C.C. box culvert to be provided. For sewerage below ground stoneware pipes conforming to IS: 651 with concrete bedding and haunch.		
5.00.00	COLOUR COATED AND OTHER SHEETING WORK		
5.01.00	Material a) Wall Cladding & Roofing Material Troughed permanently colour coated sheet of approved shade and colour shall be		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 19 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
	i) either of steel with minimum 0.6mm bare metal thickness (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G250 as per AS1397 / grade SS255 as per ASTM A653M / grade S250GD as per EN 10326 with zinc coating to class Z275 / aluminium-zinc alloy coating to class AZ150 ii) or of minimum 0.5mm BMT (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G350 as per AS1397 / grade SS340 class 4 as per ASTM A792M / grade S350GD as per EN 10326 with zinc coating to class Z275 / aluminium-zinc alloy coating to class AZ150 iii) or of steel of minimum 0.4mm BMT (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G550 as per AS1397 / grade SS550 as per ASTM A792M / grade S550GD as per EN 10326 with zinc coating to class Z275 / aluminium-zinc alloy coating to class AZ150 Alternatively aluminium feed material of minimum bare metal thickness of 0.7 mm of aluminium alloy of Series 31000 and above as per IS 737 and IS 1254. b) Metal Deck Roof Material Troughed permanently colour coated metal decking sheets shall be i) either of steel with minimum 0.8mm bare metal thickness (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G250 as per AS1397 / grade SS255 as per ASTM A653M / grade S250GD as per EN 10326 with zinc coating to class Z275 ii) or of minimum 0.6mm BMT (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G350 as per AS1397 / grade SS340 class 4 as per ASTM A792M / grade S350GD as per EN 10326 with zinc coating to class Z275 iii) or of steel of minimum 0.6mm BMT (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G550 as per AS1397 / grade SS550 as per ASTM A792M / grade S550GD as per EN 10326 with zinc coating to class Z275. Alternatively aluminium feed material of minimum bare metal thickness of 0.9 mm of aluminium alloy of Series 31000 and above as per IS 737 and IS 1254 can also be used for metal decking. Thickness tolerance of (+/-) 0.04mm is permissible. However, all design calculations shall be carried out on the basis of lowest value of sheet thickness provided. 5.02.00 Colour Coating Steel shall be colour coated with total coating thickness of at least 40 microns (nominal) comprising of silicon modified polyester (SMP with silicon content of 30% to 50%) paint or Super Polyester paint, of minimum 20 microns (nominal) dry film thickness (DFT) on external face over primer coat of minimum 5 microns (nominal) and minimum 10 microns (nominal) SMP or super polyester paint over primer coat of minimum 5 microns (nominal) on internal face. SMP and Super polyester paint systems shall be of industrial finish of product type 4 of AS/NZ2728. 5.03.00 Design Criteria For wall cladding insulated / uninsulated sides and roof, permanently colour coated sheet of troughed profile shall be used. The nominal depth of trough shall be 30 mm.
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 20 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
5.04.00	For profiled metal decking sheets (to be used for RCC floor slab or roof slab) the sectional modulus and moment of inertia of troughed profile per meter width shall be so as to limit the deflection of sheets to span/250 under total super imposed loading (DL +LL) comprising the self-weight of metal deck sheet, dead weight of green concrete and an additional construction load 100kg per sq.m for two span condition. The section modulus and moment of inertia of troughed profile shall be computed as per the provisions of IS 801 for satisfying the deflection and strength requirements. For metal deck sheets used for roofing (with or without RCC) and side cladding, the sectional modulus and moment of inertia of troughed profile per metre width shall be such that the deflection of sheets is limited to span/250 under design wind pressure for two span condition. The sectional modulus and moment of inertia of troughed profile shall be computed as per the provisions of IS 801 for satisfying the deflection and strength requirements. No increase in allowable stress is permissible under wind load condition.			
	Fasteners Side cladding/roofing/decking sheets shall be fixed to the runner/purlins using self-drilling special coated fasteners confirming to corrosion resistant class 3 of AS3566 and tested for 1000 hours salt spray test. Spacing of Self-drilling fasteners in transverse direction (along runners/purlin) shall be equal to the pitch of trough or 250(+/-100) mm, whichever is lesser and in longitudinal direction at every runner/purlin location. Shear anchor studs shall also be provided through troughed permanently colour coated metal decking sheets metal deck, which are to be used as permanent shuttering, at regular interval on all top flange / flange plate of structural beams. The shear anchor studs for fixing metal deck sheet to floor structural beams shall conform to Type-B studs specified in AWS D1.1/D1.1M or equivalent as shear connector of 19mm diameter and 100mm length manufactured from cold drawn round steel bars conforming to the requirement of ASTM A 29, of grade designation 1010 through 1020, of standard quality with either semi-killed or killed, welded by Drawn Arc Stud Welding through metal deck sheet. The shear anchor studs for fixing metal deck sheet to roof structural purlins shall conform to Type-B studs specified in AWS D1.1/D1.1M or equivalent as shear connector of 16mm diameter and 65mm length manufactured from cold drawn round steel bars conforming to the requirement of ASTM A 29, of grade designation 1010 through 1020, of standard quality with either semi-killed or killed, welded by Drawn Arc Stud Welding through metal deck sheet. Alternatively, J/U type hooks shall be used in roofing which shall be provided in transverse direction (along runners/purlin) at a spacing equal to the pitch of trough or 250(+/-100) mm, whichever is lesser and in longitudinal direction at every runner/purlin location.			
5.05.00	Miscellaneous Details To minimize the number of joints, the length of the sheet shall preferably be not less than 4.5m, cut pieces shall not be used, unless specifically approved by the Engineer. However, the actual length shall be such so as to suit the purlin / runner spacing.			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 21 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
5.06.00	Lap between the sheets shall be at least 150mm in the longitudinal direction and at least one crest wide in the transverse direction which shall be properly anchored / fixed with fasteners. Z spacers if required shall be made of at least 2 mm thick galvanised steel sheet of grade 350 as per IS 277 Sealant used for cladding shall be butyl based, two parts poly sulphide or equivalent approved, non stainless material and be flexible enough not to interface with fit of the sheets Filler blocks as a trough filler shall be used to seal cavities formed between the profiled sheet and the support or flashing. The filler blocks shall be manufactured from black synthetic rubber or any other material approved by the Engineer. All flashings, trim closures, caps etc. required for the metal cladding system shall be made out of plain sheets having same material and any weather/moisture sealants with appropriate material and coating specification as mentioned above for the outer face of the metal cladding. Overlap shall be min. 150 mm or as specified by manufacturer.		
	Pre-Fabricated Insulated Metal Sandwich Panels For structures where Pre-Fabricated Insulated Metal Sandwich Panels shall be used for Roofing, the sandwich panels shall comprise top sheet as troughed permanently colour coated sheet & bottom sheet as plain permanently colour coated with 50mm thick insulation sandwiched between the two sheets. Each sheet shall be i) either of steel with minimum 0.6mm bare metal thickness (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G250 as per AS1397 / grade SS255 as per ASTM A653M / grade S250GD as per EN 10326 with zinc coating to class Z275 / aluminium-zinc alloy coating to class AZ150 ii) or of minimum 0.5mm BMT (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G350 as per AS1397 / grade SS340 class 4 as per ASTM A792M / grade S350GD as per EN 10326 with zinc coating to class Z275 / aluminium-zinc alloy coating to class AZ150 iii) or of steel of minimum 0.4mm BMT (i.e. excluding the thickness of galvanizing/aluminium-zinc coating and painting) of grade G550 as per AS1397 / grade SS550 as per ASTM A792M / grade S550GD as per EN 10326 with zinc coating to class Z275 / aluminium-zinc alloy coating to class AZ150. Alternatively aluminium feed material of minimum bare metal thickness of 0.7 mm of aluminium alloy of Series 31000 and above as per IS 737 and IS 1254. Metal sheets (steel or aluminium) shall be colour coated with total coating thickness of at least 40 microns (nominal) dry film thickness (DFT) comprising of Silicon Modified Polyester (SMP with silicon content of 30% to 50%) paint or Polyester paint, of minimum 20 microns (nominal) SMP or polyester paint on one side (exposed face), over minimum 5 micron (nominal) primer coat and minimum 10 micron (nominal) SMP or Polyester paint over minimum 5 micron (nominal) primer coat on other side. SMP and Super Polyester paint shall conform to product type 4 of AS/NZS 2728. Troughed sheet shall be of approved profile, sectional properties, (suitable for the specified loading / deflection and purlins / runners spacing), colour and shade.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS PAGE 22 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
5.07.00	Special coated fastener conforming to corrosion resistant Class 3 of AS3566 and tested for 1000 hours salt spray test shall be used for fixing Pre-Fabricated Insulated Metal Sandwich Panels with the structural members below. The contractor shall prepare working drawings of sheeting system including end and side laps, fixing details etc. before starting sheeting work at site. Polycarbonate Sheets The polycarbonate sheet to be used for cladding and glazing purpose in conveyor galleries, Transfer points & pump houses shall have toughed profile to match with the metal cladding profile. Minimum 3.0mm thick fire retardant and UV resistant polycarbonate clean sheet of approved make shall be used. The polycarbonate sheet shall be installed along with the metal cladding so as to have a watertight lapping arrangement. Suitable detailing shall be made to cater for the thermal expansion. IS 14434 to be referred for other details
6.00.00	Roof Details
6.01.00	Roof slab shall be minimum 150 mm thick(above the top surface (crest) of the metal deck sheet) and shall have minimum 10 dia HYSD reinforcement bars placed at 200 mm center both ways at top and bottom.
6.02.00	900 mm high and minimum 100 mm thick R. C. C. parapet wall shall be provided over roofs of all buildings. Parapet wall shall have suitable coping. External face of parapet wall of the buildings provided with metal cladding shall also be finished with metal cladding of design and colour as per approved architectural drawings.
6.03.00	Junction of roof and parapet shall be provided with 150 x 150 mm size concrete fillet.
6.04.00	Drain level shall be provided with 45 x 45 cm size khurras having minimum thickness of 30 mm of M-15 concrete over PVC sheet of 1 m x 1m x 400 micron and finished with 12 mm 1 : 3 cement : sand plaster.
6.05.00	Roofs of all control rooms, M. C. C. rooms, penthouse etc., shall have roof water proofing treatment. Roof water proofing treatment shall be as follows: 1) Application of polymerised mastic over the RCC roof to achieve smooth surface as primer coat. 2) Application of high solid content liquid applied urethane based elastomeric water proofing membrane, over the primer coat, to give uniform joint less dry film thickness of minimum 1.5 mm (as per ASTM C 836 and C 898). 3) For efficient disposal of rain water, the run off gradient for the roof shall not be less than 1: 100. This gradient shall be provided by screed concrete M-15 (using 12.5 mm coarse aggregate) and / or cement mortar (1: 4) over the elastomeric water proofing membrane with 25mm thick cement mortar (1:4) topping. 4) Wearing course at top, shall consist of 25 mm thick P. C. C. (M-15) cast in panels of maximum 1.2 x 1.2 m size and reinforced with 0.56 mm diameter galvanized chicken wire mesh and sealing of joints using sealing compound / elastomeric water proofing membrane. Pathways for handling of materials and movement of personnel shall be provided with 22 mm thick chequered cement concrete tiles as per IS : 13801 for a width of 1000 mm in place of P. C. C.
6.06.00	For efficient disposal of rain water, the run off gradient for the roof shall not be less than 1:100. This gradient can be provided either in structure or subsequently by
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 23 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	screed concrete M-15 (using 12.5 mm coarse aggregate) and/ or cement mortar (1:4). However, minimum 25 mm thick cement mortar (1:4) shall be provided on top to achieve smooth surface.		
6.07.00	Medium class galvanised mild steel pipes conforming to IS: 1239/ IS: 3589 with welded joints shall be provided for rain water down comers to drain off rain water from the roof. These shall be suitably concealed with masonry work, to match with the exterior finish. The number and size of down comers shall be governed by IS: 1742 and IS: 2527. RCC roof shall be provided with 45 x 45 cm size Khurras having minimum thickness of 30 mm with M-15 concrete over PVC sheet of 1mx1mx400micron and finished with 12 mm thick cement sand plaster 1:3.		
6.08.00	Access to RCC roof of Gypsum dewatering building, FGD Control room building, MCC building, Ball mill building shall be through RCC staircase, and roof access to all other buildings all shall be through cage ladder as per requirement.		
6.09.00	Fillets at junction of roof and vertical walls shall be provided with cast - in - situ cement concrete (M-15) nominal mix followed by 12 mm thick 1:4 cement sand plaster.		
6.10.00	The rainwater down comers shall be provided with suitable C.I. grating at inlet point.		
7.00.00	RCC Floors, Paving & Grade Slab details The floor slabs shall be minimum 150 mm thick(above the top surface (crest) of the metal deck sheet) and shall have minimum 10 dia HYSD reinforcement bars placed at 200 mm center both ways at top and bottom. In case Bidder opts for steel super-structure with RCC floors/ roof, the bidder shall necessarily use Troughed permanently colour coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering. The detailed material property requirement of metal deck sheet is specified elsewhere in the specification. These profiled metal deck sheets shall be fixed to the structural steel beams/ purlins using headed shear anchor studs specified elsewhere in the specification. Chequered plates (used for floors, walkways etc.) shall be minimum 6 mm thick. Mild steel flats/angles of suitable size shall be welded to the bottom portion of chequered plates at a designed spacing to stiffen chequered plates suitably. Chequered plates shall be fixed by staggered welding of suitable size. Floors of trenches shall have integral finish to concrete base. Toe guard of size 100 x 6 mm shall be provided at various openings provided in floors e.g. around stair case openings, chute openings and other similar cutouts. For conveyor walkways, angle runner to act as toe guard shall be provided. R. C. C. floors (where no brick masonry walls are provided) shall be provided with handrails all along the periphery. RCC paving of minimum 150 mm thick with M25 grade concrete, over an under bed as specified herein shall be provided for areas mentioned below. RCC paving shall be designed as rigid reinforced concrete pavement for the crane/ vehicular/ equipment movement loads which the paving has to bear. The under bed for paving shall consist of preparation and consolidation of sub-grade to the required level, laying of stone soling of 200mm compacted thick for normal duty paving and 400mm		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 24 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	compacted thick for heavy duty paving with 63 mm and down aggregate with interstices filled with selected moorum/ non-expansive soil followed by 75 mm thick 1:4:8 PCC (1 part cement, 4 parts sand and 8 parts stone aggregate) with 40 mm nominal size aggregate. For normal duty paving, reinforcement of the RCC paving shall consist of minimum 8mm dia bars @ 200 mm c / c in both directions at the centre of the slab. For heavy duty paving/ passage, reinforcement of the RCC paving shall consist of minimum 10mm dia bars @ 200 mm c / c in both directions at the centre of the slab. Paving areas shall be provided with the metallic hardener floor finish as specified elsewhere in the specification. Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings. These passage areas shall be provided with heavy duty paving for movement of heavy vehicles. The top surface of the passages shall be finished with 50 mm thick metallic hardener topping. Heavy duty paving shall also be provided for the areas in the equipment lay down area, unloading & maintenance area with 50 mm thick metallic hardener topping. Lightly loaded areas such where no heavy traffic movement is envisaged shall be provided with Normal Duty paving. All facility buildings shall be provided with 750 mm wide plinth protection all around. It consists of 50 mm thick P.C.C. M-20 grade with 12 mm maximum size aggregate over 200 mm thick stone soling using 40 mm nominal size rammed, consolidated and grouted with fine sand An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection. Further, heavy duty paving shall be provided for passages connecting the outer periphery road to have access to the various facilities/buildings. Plinth level of all buildings shall be kept at least 500 mm above the finished grade / formation level. Suitable open RCC drains shall be provided to dispose off storm water drain. The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain. Sewer lines (Cast Iron), interconnected by sewer manholes (RCC) at regular intervals (not exceeding 30 meter centre to centre) shall be provided to dispose off sewage from FGD block to sewage pump house. GRADE SLAB OF BUILDINGS AT GROUND FLOOR In buildings, the grade slab shall consist of 150mm thick RCC M25 grade base slab over an under bed as specified below. The under bed for ground floor slab shall consist of 75mm thick 1:4:8 PCC on stone soling of 200mm compacted thick with 63 mm and down aggregate with interstices filled with well graded selected sand/ moorum/ non-expansive soil on compacted and dressed sub - grade. Reinforcement for the slab shall consist of minimum 8mm dia. bars @ 200 mm c/c at top & bottom of the slab in both directions. However, at unloading & maintenance area, stone soiling of minimum 400mm thick and grade slab with minimum 10mm dia bars @ 200 mm c/c at top and bottom in both directions shall be provided. Further, top surface of grade slabs shall be finished with 50mm thick metallic hardener topping.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 25 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
8.00.00	Brickwork and allied masonry works		
	All brick walls shall be non - load bearing in-filled panel walls.		
	All brickwork shall be designed as per Indian Standards and shall be plastered on both faces. All external walls shall be minimum one brick thick in 1: 6 cement: sand mortar. Brick walls shall be provided with 12 mm and 18 mm thick 1: 6 cement: sand plaster on smooth and rough face of the brick work respectively.		
	Bricks to be used in brickwork shall be of minimum Class designation 50.		
	Brickwork cladding for various structures shall be so provided that there is a clear gap of 40 mm between inside face of external brick wall and outside face of column flange. Structural steel wall beams supporting brickwork shall be suitably encased with plaster or 1: 2: 4 concrete as the case may be. In case of box type steel beam, encasement shall be done with cement sand plaster in specified thickness and proportions over G. I. wire netting of 0.9 mm thickness.		
9.00.00	Parapets, chajjas, windows and door heads, architectural faces, fins etc. shall be provided with drip course in 1 : 4 cement sand mortar.		
	50 mm thick Damp proof course shall be provided at plinth level for all brick wall.		
	All R. C. C. ceilings shall be rendered smooth and finished with whitewash unless otherwise specified. Ceiling of control rooms, M. C. C. rooms (except areas provided with false ceiling) shall be provided with 6 mm thick plaster.		
	Earthing Mat		
	40 mm Dia MS Rods as earthing mat, placed at a distance of 1.0M away and at depths between 0.60M and 1.00M shall be supplied and laid all around the periphery of buildings, structures, and outdoor equipment, as per the approved drawings. Risers of 40 mm Dia MS Rods and connecting to the above Earthing mat shall also be supplied and laid in position by the Contractor, as per the approved drawings. Risers shall be laid up to a height of 300 mm above the local Ground level, at each of the columns of the buildings on outside of the buildings, and minimum 2 (Two) numbers for structures and outdoor equipment. The contractor also supply and lay necessary number of 3.0 M deep vertical 40 mm Dia MS Rods Earthing electrodes and connecting them to the Earthing mat, as per the approved drawings and the supplying and laying of 40 mm Dia MS Rods for connecting the Contractor's earthing mat with the Employer's earthing mat separately at two locations.		
10.00.00	SITE LEVELLING		
	Site leveling of gypsum storage area , lime storage area , gypsum dewatering area , truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing. Bidder shall deploy adequate number of experienced site leveling contracting agency(s) with requisite earth moving and compacting equipment to complete the work as per schedule.		
Bidder shall carry out the topographical survey before he commences detailed design and site leveling. This survey shall cover the entire FGD area including gypsum			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS
PAGE 26 OF 69			

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	storage ,gypsum handling area , lime storage area ,gypsum dewatering area , truck hopper area, limestone grinding and slurry storage area in Bidder's scope of work. Based on field observations the contractor shall prepare and submit for Owners review the survey maps of the surveyed sited on suitable scale, indicating grid lines, contour lines and demarcating all permanent features like roads, railways, waterways, buildings, power lines, natural streams, trees etc. For each area two sets of survey maps shall be prepared and submitted, one showing the spot levels and contours with grid lines and the other showing the grid lines, contours and permanent features Since the construction of roads and drains for the FGD area including gypsum storage ,gypsum handling area , lime storage area ,gypsum dewatering area , truck hopper area, limestone grinding and slurry storage area is included in the scope of Bidder, it shall be the responsibility of the Bidder to ensure that these facilities are also constructed along with site leveling works. Bidder shall ensure that road access and drainage facilities for each block is available when site leveling in that block is completed. Unless otherwise instructed by the Engineers, all roads and drains within a block shall be constructed by the bidder within a month from the date of completion of site leveling of that block. The specified formation level(s) shall be achieved either by excavation where the existing ground levels are higher than the specified formation level or by raising by controlled filling with borrowed earth where the existing ground levels are lower than the specified level All materials arising out of site clearance and excavation shall be the property of owner. They shall be dealt with in the manner specified by the Engineer. Earth / boulders / rock etc. excavated and useful portion (serviceable materials) of trees cut shall be stacked at suitable places within Owner's acquired land for the plant including the reservoir and the ash disposal area in a manner as directed by the engineer. Woods, branches, trunks of trees shall be termed as serviceable material. Other materials like twigs, leaves, roots, vegetable and organic matters etc. shall be termed as unserviceable material and shall be sorted out from the serviceable materials before disposal. They shall be cleared from the area and disposed off at places within Owner's acquired land for the plant including the reservoir and the ash disposal area in a manner as directed by the engineer. If the excavated material is suitable and accepted by the Engineer as fill material, the same can be used for filling in other areas where raising by filling is required. Otherwise the same shall be taken and stacked at places(s) within the plant boundary as directed by the Engineer. Filling with rock shall be done only after the written permission of the Engineer in the following manner: Filling with rock shall be done only in areas identified for laydown and preassembly . Original ground after removal of all organic and vegetable matters shall be consolidated by rolling as directed by the engineer subject to a minimum of six passes of 8-10 tonnes roller.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 27 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	- Excavated rock shall be laid (on original ground or after filling 300 mm thick layers of soil as specified), in layers not exceeding 1000 mm and rolled with vibratory roller (10-15 tonnes static weight) with minimum six passes. - Over the compacted layer of rock, soil shall be filled in horizontal layers not exceeding 300mm in compacted thickness. The soil shall be compacted as specified elsewhere. - It shall be ensured that the top soil layer is in minimum 3 layers of 300 mm each. To achieve this the thickness and number of rockfill layers below can be suitably adjusted. Contour map and spot levels of the area based on the preliminary survey carried out by Owner is enclosed for the purpose of guidance of Bidder. However, Owner does not take any responsibility about the accuracy of the survey details furnished and any variation of the said data shall not constitute a valid reason for changing the terms and conditions of the contract. Bidder is requested to carry out his independent assessment of the existing ground levels before furnishing his bid. Detailed survey shall be carried out by Bidder after award of work and all findings as stated earlier shall be submitted for Owner's review. Before commencement of cutting/filling, all organic and vegetable matters like grass, plants, shrubs, bushes, weeds, trees (with girth less than 30 cm measured at height of 1m above ground level) etc. in the areas to be filled, shall be completely removed along with their roots and disposed off. It shall also be ensured that the area to be filled is clear of any water, slush etc. Original ground shall be compacted by rolling as directed by the Engineer subject to a minimum of six passes of 8 to 10 tonne roller. The earth shall then be spread in horizontal layers not exceeding 300 mm in compacted thickness. Each layer shall be watered and compacted with proper moisture content and with such equipment as may be required to obtain a compaction of 95% or more of Standard Proctor's maximum dry density. The moisture content of the fill material shall be controlled to obtain near optimum moisture content during compaction. The fill material shall be tested for determining optimum moisture content and maximum dry density by Standard Proctor Test as per IS : 2720 (Part-VII). The fill material shall also be tested for determining moisture content before compaction as per IS:2720 (Part-II). For each of the above tests, one sample for every 10,000 cubic metre of fill material shall be tested. Additional samples shall be tested, whenever there is a change in the source or type of fill material. The compacted soil shall be tested for its dry density as per IS2720 (Part-XXIX) or Part-XXVIII). Samples shall be taken at the rate of one sample for every 10,000 sq.m. area for each compacted layer. In addition random checks shall be carried out in compacted soils by means of Proctor needle penetration. Bidder shall submit to the Engineer, the test results immediately after completion of the tests. A sample shall be deemed to have passed the test when the in-situ dry density is equal to or more than the specified percentage of maximum dry density. If a sample taken from a layer fails to pass the test, the layer shall be further compacted till two samples		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 28 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	taken and tested from this layer pass without any negative deviation. Only after this. spreading of further layers shall be taken up. Before start of filling, the Bidder shall submit to the Owner his proposal for the methodology to be adopted for compaction for each type of fill material. The Bidder shall also carry out compaction trials to establish the proposed methodology. The Bidder shall start the compaction work only after approval of the methodology by the Owner The surface of the cut/filled up areas after reaching final level shall be dressed to the required levels and slopes. The difference in levels shall not be more than +/- 10cm locally. The borrow areas outside the overall plant boundary limits for obtaining suitable fill material which is required over and above the earth available after cutting high grounds within the plant area, for site levelling shall be arranged by the Bidder himself and all expenses in respect of royalties, taxes, duties, etc. for borrow areas/fill material shall be borne by him. He shall also obtain and submit to the Owner the necessary clearances/permission from the concerned authorities for the borrow areas/fill material. Material suitable for filling shall be loaded and transported to the filling site by the Bidder. Any coarse grained or fine grained low plastic soil, free from shingle, salts, organic matter, sod or any other foreign substances, may be used for filling. The Bidder shall test the fill material to establish its suitability and submit its results to the Owner. Fill material shall be approved by the Owner. The following types of materials shall not be used for filling: a) Material from swamps, marshes and bogs. b) Expansive clays c) Peat, logs, stumps, sod and perishable materials. d) Materials susceptible to combustion e) Any material or industrial and domestic produce which will adversely affect other materials in the work. f) Materials from prohibited areas Bidder shall include in his offer any extra filling that may be required on account of subsidence of the original ground due to overburden of filling above and/or compaction works for site levelling.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 29 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
11.00.00	After levelling, the contractor shall establish concrete pillars at the intersection points of the grid lines for future reference. These pillars shall project at least 450 mm above the formation level and shall be labelled permanently with their respective coordinates and reduced levels. Filling upto the specified formation level shall extend at least 2.0m beyond the outside face of boundary wall/fence. Thereafter, it shall be finished at a suitable slope (not steeper than 1 Vertical:2 Horizontal) and provided with good quality dry stone pitching minimum 300mm thick for slope upto level difference of 3m. If the level difference is more than 3m, the stone pitching shall be provided with RCC bands with suitable design and benching.			
	FENCING Fencing with toe wall and steel gates shall be provided around the gypsum storage area , lime storage area , gypsum dewatering area , truck hopper and associated areas . Fencing shall comprise of PVC coated GI chain link fencing of minimum 8G (including PVC coating) of mesh size 75 mm and of height 2.4 m above the toe wall. The diameter of the steel wire for chain link fence (excluding PVC coating) shall not be less than 12G. All Fence posts shall be of 75 x 75 x 6 MS angles spaced at 2.5 m c/c distance. All corner posts will have two stay posts and every tenth post will have transverse stay post. Suitable R. C. C. foundation for the post and stays shall be provided based on prevailing soil conditions. Gates shall be sturdy with locking provisions. Toe walls of brick masonry shall be provided between fence posts all along the run of the fence with suitable foundation. Toe wall shall be minimum 200 mm above the formation level with 50 mm thick P. C. C. coping (1: 2. 4) and shall extend minimum 300 mm below the formation level. Toe wall shall be plastered on both sides and painted with two coats of cement paint of approved colour and shade. Toe wall shall be provided with weep holes at suitable spacing.			
12.00.00	ROADS All roads shall be of rigid pavements unless otherwise specified. The design of rigid pavement shall be carried out as per IRC: 58. The effects of design wheel load, maximum tyre inflation pressures, tyre contact area for the vehicle, traffic loads, environmental factors such as temperature changes in the pavement, other factors, like impact, load repetitions, etc., are to be taken. Detailed plate load tests to determine the modulus of sub grade reaction "K" shall be carried out as per the procedure outlined in IS: 1888. The design traffic load shall be a minimum value of 4 million standard axles. The road shall be designed for 30 years of life and considering a minimum traffic growth rate of 1 per cent per annum. The concrete pavement for roads shall be minimum 250 mm thick slab. The road construction including its shoulders, base, sub base and concrete pavement shall be as per IRC standards. IRC: 58 shall be followed for the pavement design and IRC: 15 shall be followed for the construction of the concrete pavement.			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 30 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	The road base shall be with minimum 150 mm thick dry lean concrete over granular sub base. Dry lean concrete shall be laid by a mechanical paver and compacted by vibratory rollers. Concrete pavement of the road shall be done with fully mechanized paver fitted with electronic sensors for construction techniques. Dry lean concrete shall be minimum M10 grade and concrete pavement slab shall be minimum M35 grade concrete. The finished top (crest) of all roads shall be 350 mm above the surrounding finished ground level. The sub grade under all roads and its shoulders shall be compacted to achieve 95 per cent or more of Standard Proctor's Density MDD using mechanical means. Cutting / extending / rerouting / remaking of existing roads including associated works to maintain continuity of road system / network shall also be carried out. All culverts and RCC bridges at crossings of all roads / rail tracks / facilities with drains / nallahs / channels / roads / rail tracks / pipes / other facilities, etc. are to be designed and constructed. Unless otherwise specified, all roads shall be double lane roads.		
13.00.00	GATE ALONG BOUNDARY WALL: The gate shall be complete with fabricated hinges, MS aldrops with locking arrangement, tempered steel pivot, guide track of MS tee, bronze aluminum ball bearing, castor wheel etc. All gates shall be given anti-corrosive treatment in three coats. The structural steel shall confirm to IS: 2062 (latest) and all other relevant IS codes. Beside the each gate one room of size not less than 3m X 3m shall be provided for security guards. The room shall be made of brick/ RCC and with RCC roof. In addition to the room, one toilet block shall also be provided.		
14.00.00	LIME & GYPSUM HANDLING AND ASSOCIATED BUILDINGS STORM WATER DRAINAGE SYSTEM Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr. All RCC drains shall be either RCC Cast-in-Situ or RCC Pre-cast drains. The minimum grade of concrete shall be M25 for RCC Cast-In-Situ drains and M30 for RCC Pre-cast drains. The maximum velocity for RCC open drains shall be limited to 1.8 metre per second. However, minimum velocity of 0.6 metre per second for self - cleansing shall be ensured. Bed slope not milder than 1 in 1000 shall be provided. Open RCC rectangular section, unless required otherwise due to functioned requirement, shall be provided for all drains. The thickness of side walls and bottom slab of RCC drains shall be minimum 150mm or as per design considerations whichever is higher for drains upto depth of 1m from formation level. For depth of drain more than 1m from formation level, the thickness of side walls and bottom slab		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 31 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
15.00.00 SEWERAGE SYSTEM 16.00.00 LOADING 16.01.00	of RCC drains shall be minimum 200mm or as per design considerations whichever is higher. The drains shall be provided on both sides of roads .These shall be designed to drain the road surface as well as all the free and covered areas, etc. Box culverts shall be provided at all rail, road and other crossings. All drains inside the building shall have minimum 40 mm thick grating covers. In areas where heavy equipment loads would be coming, precast RCC covers shall be provided in place of steel grating. The invert levels of the in-plant and plant peripheral drains shall be kept such that water can be discharged by gravity to the main / trunk drains under all conditions. The invert levels of the drains shall be decided in such a way that the water can easily be discharged to the natural water bodies above the high flood. The connection of sewer pipe line for the associated buildings of FGD and Lime and gypsum handling area to nearest owner's sewage network is in bidder's scope. Cement concrete pipes of class NP-3 as per IS:458 shall be used below ground level for sewage disposal in all areas . However, for pressure pipes and under roads spun C.I. pipes conforming to IS:1536 of required class shall be used. RCC manholes with CI cover shall be provided at every 30m along the length, at connection points, and at every change of alignment, gradient or diameter of a sewer pipeline. This shall be as per IS:4111. Sewage pump house shall be provided as per IS:4111. For consideration of loads on structures IS : 875 - 'Code of practice for structural safety of buildings' shall be followed. In addition to the dead load, live load, equipment load (including impact / vibration). Temperature loads etc. various loading conditions arising due to operation and maintenance of equipment shall be considered in the design. The structure and equipment shall also be designed for seismic loads as per the "Criteria for Earthquake Resistant Design of Structures and equipment" and the "Criteria for Wind Resistant Design of Structures and equipment" specified in the "Project Information section" of technical specification. Wind and seismic forces shall not be considered to act simultaneously. The following minimum live loads shall be adopted for the design of various structures. If actual expected load is more than the specified load, then actual load is to be considered.
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 32 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	a) Roofs b) R. C. C. floors c) Stair and balconies d) Toilet rooms e) Chequered plate floors f) Walkways (including walkways in conveyor galleries) g) Conveyor galleries h) Road Culverts and its allied structures including R. C. C. pipe crossing & road crossing of trenches. i) Channels / trenches j) Covers for trenches / channels	150 Kgs. / Sq. M. for accessible roofs and 75 Kgs. / Sq. M. for non - accessible roofs. In addition to this dust load (Dead load) of 150 Kgs. / sq. m. on flat roofs & 75 Kgs. / sq. m. on inclined roofs shall also be considered. 500 Kgs. / Sq. M. 500 Kgs. / Sq. M. 200 Kgs. / Sq. M. 400 Kgs. / Sq. M. 300 Kgs. / Sq. M. In addition to the live loads, loads due to cable trays, fire fighting / service water pipes shall also be considered @ 125 Kgs. / m (minimum) on each of the longitudinal girder. Roof-truss members are to be checked for supporting fire fighting pipes/ Service water pipes. For class 'AA' loading and checked for class A loading as per IRC standard. In addition to earth pressure and water pressure, etc. additional earth pressure due to surcharge of 2T / Sq. M. shall also be considered for design. Covers for channels & trenches, shall be designed for a live load of 0.4T Sq. M. and loading as mentioned under clause in trenches, whichever is critical.	
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 33 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
	k) Sumps and tanks and other underground basement type structures In addition to earth pressure with a surcharge of 2T / Sq. M. (or surcharge due to Railway loading whichever is critical for Railway load bearing structures etc.) and sub - soil water pressure etc. These are also to be designed for the following conditions : i) Water / liquid inside and no earth outside (applicable only to such structures which are liable to be filled up with water or any liquid). ii) Earth with surcharge outside and no water / liquid inside iii) For underground (basement) structures protection against buoyancy during execution and after execution shall be ensured without superimposed loadings with minimum factor of safety of 1.2 against buoyancy. If the erection load is higher than the specified live loads on any floor or part thereof, then the erection loads are to be considered for the design. Permissible increase in stresses of materials and bearing pressure of soil due to wind load or seismic load shall be as per relevant I. R. S. and I. S. code. 16.02.00 Crane load For crane loads, an impact factor of 25% and lateral crane surge of 10% (of lifted weight + trolley weight) shall be considered in the analysis of frame according to the provisions of IS:875. The longitudinal crane surge shall be 5% of the static wheel load. Longitudinal surge and lateral surge shall not be considered to act simultaneously. 16.03.00 Temperature load For temperature loading, the total temperature variation shall be considered as 2/3 of the average maximum annual variation in temperature. The average maximum annual variation in temperature for this purpose shall be taken as the difference between the mean of the daily minimum ambient temperature during the coldest month of the year and mean of daily maximum ambient temperature during the hottest month of the year. The structure shall be designed to withstand stresses due to 50% of the total temperature variation. Suitable expansion joints shall be provided in the longitudinal direction wherever necessary with provision of twin columns. The maximum distance of the expansion joint shall be as per the provisions of IS: 800 and IS: 456 for steel and concrete structures respectively. 17.00.00 DESIGN CRITERIA 17.01.00 The design of all R. C. C. structures shall be carried out as per 'code of practice for plain and reinforced concrete for general building construction', IS : 456 (latest).
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 34 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS				
17.01.00	Design of steel structures shall be done by the Working stress method. Design shall be as per provisions of IS:800 :1984 and other relevant IS standards.				
17.02.00	Minimum size of the angle section to be used as structural members shall be 50 X 50 X 6. Minimum weld size shall be 6 mm. Connections shall be designed for 70 % of shear capacity of the member or the actual shear force, whichever is higher. The steel structures using tubular sections shall be designed and fabricated as per IS:806 – “Code of Practice for use of steel tubes in general building construction.” and EN 1993-1-8:2005. Minimum grade of steel & thickness of Tubular/Hollow sections shall be Yst 240 Mpa & 4.0mm respectively				
17.03.00	The building shall conform to local bye - laws, rules and regulations for industrial buildings and also B. I. S. publications, SP 32 and 41.				
17.04.00	Slotted holes shall not be assumed to act as expansion joint for relieving of stresses and suitable bearings shall be provided at the supports.				
17.05.00	Stresses for all structures shall be checked for the higher of the forces obtained from gust factor method and the peak wind speed method.				
17.06.00	Horizontal bracing system shall be provided at floor levels around the openings.				
17.07.00	Shear force in steel columns shall be transferred to the pedestals / foundations exclusively either through foundation bolts or the shear key arrangement.				
17.08.00	For design of liquid retaining structures, IS : 3370 (Part - I to IV) (latest) shall be followed. Face of the structure in contact with liquid shall be designed as un - cracked section. For design of R. C. C. pipes for culverts, latest editions of IS : 458, IS : 783 should be followed.				
17.09.00	For design of all underground structures / foundations, ground water table shall be assumed at the formation level (i. e. the adjoining ground level). For all underground structures like tunnel, underground transfer point and underground hopper etc. crack width shall be limited to 0.2mm.				
17.10.00	Design of masonry walls shall be made as per IS : 1905.				
17.11.00	Civil task drawing indicating various equipment loading and supporting arrangement and floor loads to be submitted along with the design calculation.				
17.12.00	Minimum 0.12% of reinforcement shall be provided on the top face of the foundation concrete on either direction and minimum percentage of reinforcement at bottom face of foundation shall be same as that stipulated for beam as per IS:456.				
17.13.00	Foundations for all tanks shall be designed for as per IS: 803.				
17.14.00	Footings shall be so proportioned to as to minimise the differential settlement.				
17.15.00	All gallery supporting trestles shall be so proportioned that the transverse deflection of gallery due to wind / seismic load should not exceed trestle height / 1000 as stipulated in IS: 11592. This deflection condition shall be strictly followed. Peak wind speed method shall be considered for checking the transverse deflection.				
<table><tr><td>LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE</td><td>TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2</td><td>SUB-SECTION-IV-D CIVIL WORKS</td><td>PAGE 35 OF 69</td></tr></table>		LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 35 OF 69
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 35 OF 69		

CLAUSE NO.	TECHNICAL REQUIREMENTS											
17.16.00	The crusher and transfer house structures shall be so designed that transverse deflection at places where conveyor galleries meet, should be equal to the respective transverse deflection of conveyor supporting trestles.											
17.17.00	Deflection criteria The maximum Horizontal Deflection for various structures shall not exceed and be limited to the following: <table><tr><th>Sl. No.</th><th>Description</th><th>Maximum value of</th></tr><tr><td>1.</td><td>For Trestles and transfer points (Transverse deflection at Conveyor gallery supporting level)</td><td>Height/1000 (For Wind load by Peak Wind Speed Method / Seismic Load)</td></tr><tr><td>2.</td><td>For other Buildings</td><td>Height/325</td></tr></table>			Sl. No.	Description	Maximum value of	1.	For Trestles and transfer points (Transverse deflection at Conveyor gallery supporting level)	Height/1000 (For Wind load by Peak Wind Speed Method / Seismic Load)	2.	For other Buildings	Height/325
Sl. No.	Description	Maximum value of										
1.	For Trestles and transfer points (Transverse deflection at Conveyor gallery supporting level)	Height/1000 (For Wind load by Peak Wind Speed Method / Seismic Load)										
2.	For other Buildings	Height/325										
17.18.00	a) Permissible deflection (unless specified otherwise in this specification) for latticed framework and beams of floors other than drive floor shall be span/325. b) The allowable deflection for beams directly supporting drive machinery shall be restricted to span/500 unless specified otherwise in this specification. c) The deflection for manually operated cranes & monorail supporting beams shall not exceed span/500. For electric overhead cranes : 1) upto 50 t capacity : span/750 2) over 50 t capacity : span/1000 d) The vertical deflection of metal deck sheet for roofing and side cladding shall be limited to span/250 e) The permissible vertical deflection for beams supporting drive machinery shall be restricted to span / 500 and for other beams it shall be within span / 325. f) Permissible deflection for all purlins, cladding runners, roofing/cladding sheets and grating / chequered plates shall be span/250. However, the maximum vertical deflection of Grating/ Chequered plate shall be limited to 6 mm.											
17.19.00	a) Dispersion of load in any direction through soil shall be as per IS: 8009 (relevant part). b) Dispersion of load through concrete shall be considered at an angle of 45 degrees with horizontal from the edge of contact area.											
17.20.00	a) The design and construction of RCC structures shall be carried out as per IS: 456. Working stress method shall be adopted for the design wherever											
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS PAGE 36 OF 69									

CLAUSE NO.	TECHNICAL REQUIREMENTS			
17.21.00	specifically mentioned in this specification.			
	b)	For design and construction of steel-concrete composite members, IS: 11384 shall be followed.		
	c)	For reinforcement detailing, IS: 5525 and SP: 34 shall be followed.		
	d)	Two layers of reinforcement (on both inner and outer faces) shall be provided for RCC wall sections having thickness 150 mm or more.		
17.22.00	a)	All RCC liquid retaining/conveying shall be designed by working stress method as outlined in clause no. 4.5 of IS 3370 (Part-2) 2009 unless specified other wise.		
	b)	Water proofing treatment shall be provided for liquid retaining/ carrying structures and basement type structures (requiring dry working condition). Dense and durable concrete with water cement ratio not more than 0.45 shall be used. Plasticiser /super-plasticiser cum water proofing compound shall be added to the concrete. All the construction/expansion joints shall be provided with PVC water bar and/or chemical injection grouting as per IS:6494. As applicable internal/external surface of such structures shall be provided with acrylic based polymer modified cementitious composite coating system for critical structures. For liquid carrying/retaining structures, minimum two coats of such coating shall be applied. For external application wherever the surface is in contact with the earth, fine silica/quartz sand of 0.6 mm nominal size shall be added in the coating mix for better abrasion resistance and total nominal thickness of such coating shall be minimum 1.5 mm. For non critical structures minimum two coats of bitumen grade 85/25 as per IS:702, mixed with 1% of anti-stripping compound meeting the requirement of IS:6241, shall be applied. The total application of bitumen shall not be less than 1.7 kg/sq.m.		
		Bidder shall submit a comprehensive scheme for water proofing treatment based on above or any other alternative scheme, internationally accepted for Employer's approval prior to commencement of work.		
	c)	All liquid retaining/carrying structures shall be tested for water tightness as per the provisions of IS: 3370 and IS: 6494 and in case of leakage, the same shall be rectified by chemical injection grouting through nozzles.		
17.23.00	For design of all underground structures, foundations, etc. ground water table shall be assumed at the finished ground level unless specified otherwise.			
17.24.00	Earth pressure for all underground structures shall be calculated using coefficient of earth pressure at rest or co-efficient of active earth pressure, whichever is applicable, depending upon the structural configuration. However, for the design of substructure of pump houses, earth pressure at rest shall be considered. Co-efficient of passive earth pressure shall be used only in design of shear keys for stability against sliding.			
17.25.00	a)	Following loading conditions shall be considered in addition to the loading from super structure for the design of substructure of pump house, channels, sumps, tanks, trenches and other underground structures containing liquid		
	i)	Water pressure from inside and no outside pressure, like earth pressure, ground water and surcharge pressure (applicable only to structures, which are liable to be filled up with water or any other liquid.)		
	ii)	Earth pressure, surcharge pressure and ground water pressure from outside and no water pressure from inside.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 37 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
17.25.00	iii) Design shall also be checked against buoyancy due to the ground water during construction as well as after construction stages. Minimum factor of safety of 1.2 against buoyancy shall be ensured considering empty condition inside and ignoring the superimposed loadings. Provision of pressure relief valves/flap valves, etc., shall not be permitted to counter the buoyancy unless specified otherwise. iv) Base slab and piers of the pump houses shall also be designed for the condition of different combination of pump sumps being empty during maintenance stages with maximum ground water level. b) Intermediate dividing pier of pump sumps and partition wall (if applicable) in channel shall be designed considering water on one side only and other side being empty for maintenance. c) All pump houses and other substructures (wherever applicable) shall be checked for stability against sliding and overturning during construction as well as operating conditions for various combinations of loads. Design of Block Foundation a) Block foundation resting on soil shall be analyzed using elastic half space theory. In case the foundation is supported over piles, Novak's approximation shall be used for determining the spring constant and damping ratio of pile groups. The mass of the RCC block shall be at least three times the mass of machine. Free vibration analysis of the foundation shall be carried out to evaluate the natural frequencies. The fundamental natural frequency shall be kept at least 20% away from the operating frequency (speed). Forced vibration analysis shall be carried out if the dynamic forces are made available by the machine supplier in which case the amplitude limits stipulated by the machine supplier and ISO 10816, whichever is lower, shall be satisfied. Reinforcement design shall be done by working stress method as per IS:456-2000 and IS:2974 (Part-IV). b) For the foundations supporting minor rotating equipment weighing less than one ton or if the mass of the rotating parts is less than one hundredth of the mass of the foundation, no dynamic analysis is necessary. However, if such minor equipment is to be supported on building structure, floors, etc., suitable vibration isolation shall be provided by means of springs, neoprene pads, etc., and such vibration isolation system shall be designed suitably.			
	18.00.00	Coating on RCC water retaining structures (other than drinking water) Epoxy phenolic coating shall be applied on internal surfaces of the RCC water retaining structures, as per details specified below: All concrete surfaces shall be provided with two component transparent polyamide cured epoxy sealer coating (having solid by volume minimum 40% ±2%) of minimum 50 micron DFT. Surface to be coated shall be absolutely dry, clean and dust free. Sealer coat shall be followed with the application of epoxy phenolic coating (solid by volume minimum 63%) of minimum 400 micron DFT. This coat shall be applied after an interval of minimum 24 hours (from the application of primer coat) by airless spray technique.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 38 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	Coating on RCC water retaining structures (drinking water) Internal surfaces of RCC water retaining structures shall be provided with minimum 400 micron Food grade epoxy coating complying to FDA Title 21, Part 175.300. Surface to be coated shall be absolutely dry, clean and dust free			
19.00.00	Fabrication All steel structures shall be fabricated in factory, transported and erected at site. All factory fabricated structures shall have bolted field connections. Chimney flue liners can either be fabricated at factory in segments, transported and welded at site before erection or fabricated at site. For Chimney flue liners, to prevent flue gas leakages, the applicable field joints shall necessarily be welded.			
20.00.00	Electrodes			
20.01.00	The electrodes used for welding shall be of suitable type and size depending upon specifications of the parent material, the method of welding, the position of welding and quality of welds desired. Only low hydrogen electrodes shall be used for welding of medium /high tensile steel and for mild steel plate thickness above 20 mm.			
20.02.00	All low hydrogen electrodes shall be baked and stored before use as per manufacturer's recommendation. The electrodes shall be re-baked at 250°C - 300°C for one hour and later on cooled in the same oven to 100° C. It shall be transferred to a holding oven maintained at 60°C - 70°C. The electrodes shall be drawn from this oven for use.			
20.03.00	Where coated electrodes are used they shall meet the requirements of IS: 814 and relevant ASME - Sec. II. Covering shall be heavy to withstand normal conditions of handling and storage.			
20.04.00	Only those electrodes that give radiographic quality welds shall be used for welds, which are subjected to radiographic testing.			
20.05.00	Where bare electrodes are used these shall correspond to specification of the parent material. The type of flux-wire combination for submerged arc welding shall conform to the requirements of F-60 class of AWSA-5-17-69 and IS: 3613. The electrodes shall be stored properly and the flux shall be baked before use in an oven in accordance with the manufacturer's requirements as stipulated.			
20.06.00	The contractor shall take specific approval of the weld for the various electrodes proposed to be used on the works before any welding is started.			
20.07.00	Edge Preparation for Welding Suitable edge as per weld joint detail shall be prepared either by machines or by automatic gas cutting. All edges cut by flame shall be ground before they are welded.			
20.08.00	Pre Heating and Post Heating Mild steel and medium / high tensile steel plates thicker than 20mm, will require Pre-Heating of the parent plate prior to welding as mentioned in Table - 1 for mild steel and Table - 2 for medium / high tensile steel, however, higher pre heat temperature			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 39 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS																												
20.09.00	may be required as per approved welding procedure and it shall be followed. In welding materials of unequal thickness, the thicker part shall be taken for this purpose. Base metal shall be preheated, notwithstanding provisions of IS: 9595 to the temperature given in Table - 1 for mild steel and Table - 2 for medium / high tensile steel, prior to welding or tack welding. When base metal not otherwise required to be pre heated is at a temperature below 0°C it shall be pre heated to atleast 20°C., prior to tack welding or welding. Pre heating shall bring the surface of the base metal to the specified pre heat and this temperature shall be maintained as minimum inter-pass temperature welding is in progress. TABLE - 1 MINIMUM PREHEAT AND INTERPASS TEMPERATURE FOR WELDING MILD STEEL <table><tr><th rowspan="2">Thickness of thicker part at Point of welding</th><th colspan="2">Welding Using</th></tr><tr><th>Low hydrogen electrode or submerged arc welding</th><th>Other than low hydrogen electrode</th></tr><tr><td>Upto and including 20mm</td><td>None</td><td>None</td></tr><tr><td>Over 20mm and up to and including 40mm</td><td>20°C</td><td>Not allowed</td></tr><tr><td>Over 40mm and up to and including 63mm</td><td>66°C</td><td>Not allowed</td></tr><tr><td>Over 63mm</td><td>110°C</td><td>Not allowed</td></tr></table> Note: Type of electrode and the preheating requirements for welding shall be as per approved welding procedure. TABLE - 2 MINIMUM PREHEAT AND INTERPASS TEMPERATURE FOR WELDING MEDIUM / HIGH TENSILE STEEL <table><tr><th rowspan="2">Thickness of thicker part at Point of welding</th><th colspan="2">Welding Using</th></tr><tr><th>Low hydrogen electrode or submerged arc welding</th><th>Other than low hydrogen electrode</th></tr><tr><td>Upto and including 20mm</td><td>None</td><td>Not Allowed</td></tr><tr><td>Over 20mm</td><td>120oC - 140°C</td><td>Not Allowed</td></tr></table> Note : Type of electrode and the preheating requirements for welding of medium and high tensile steel shall be as per approved welding procedure. Pre heating may be applied by external flame which is non-carbonizing like LPG, by electric resistance or electric induction process such that uniform heating of the	Thickness of thicker part at Point of welding	Welding Using		Low hydrogen electrode or submerged arc welding	Other than low hydrogen electrode	Upto and including 20mm	None	None	Over 20mm and up to and including 40mm	20°C	Not allowed	Over 40mm and up to and including 63mm	66°C	Not allowed	Over 63mm	110°C	Not allowed	Thickness of thicker part at Point of welding	Welding Using		Low hydrogen electrode or submerged arc welding	Other than low hydrogen electrode	Upto and including 20mm	None	Not Allowed	Over 20mm	120oC - 140°C	Not Allowed
	Thickness of thicker part at Point of welding		Welding Using																										
		Low hydrogen electrode or submerged arc welding	Other than low hydrogen electrode																										
	Upto and including 20mm	None	None																										
	Over 20mm and up to and including 40mm	20°C	Not allowed																										
	Over 40mm and up to and including 63mm	66°C	Not allowed																										
	Over 63mm	110°C	Not allowed																										
	Thickness of thicker part at Point of welding	Welding Using																											
		Low hydrogen electrode or submerged arc welding	Other than low hydrogen electrode																										
	Upto and including 20mm	None	Not Allowed																										
Over 20mm	120oC - 140°C	Not Allowed																											
<table><tr><td>LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE</td><td>TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2</td><td>SUB-SECTION-IV-D CIVIL WORKS</td><td>PAGE 40 OF 69</td></tr></table>		LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 40 OF 69																								
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 40 OF 69																										

CLAUSE NO.	TECHNICAL REQUIREMENTS				
	surface extending up to a distance of four times the thickness of the plate on either side of the welded joint is obtained.				
20.10.00	Thermo-chalk, thermo-couple or other approved methods shall be used for measuring the plate temperature.				
20.11.00	All butt welds with plates thicker than 50mm and all site butt welds of main framing beam supporting the bunker shall require post weld heat treatment as per procedure given in AWS D-1.1. Post heating shall be done up to 600oC and rate of application shall be 200oC per hour.				
20.12.00	The post heat temperature shall be maintained for 60 minutes per 2.5cm thickness. For maintaining slow and uniform cooling, asbestos pads shall be used for covering the heated areas.				
21.00.00	Paving, Drainage and Sewage RCC paving of minimum 150 mm thick with M25 grade concrete, over an underbed as specified herein shall be provided. RCC paving shall be designed as rigid reinforced concrete pavement for the crane/ vehicular/ equipment movement loads which the paving has to bear. The under bed for paving shall consist of preparation and consolidation of sub-grade to the required level, laying of stone soling of 200mm compacted thick for normal duty paving with 63 mm and down aggregate with interstices filled with selected moorum followed by 75 mm thick 1:4:8 PCC (1 part cement, 4 parts sand and 8 parts stone aggregate) with 40 mm nominal size aggregate. Paving areas shall be provided with the metallic hardener floor finish as specified elsewhere in the specification. 2.5 m wide paving with metallic hardener around periphery of all sumps and underground tanks shall be provided. Suitable drains shall be provided to dispose off storm water as well as floor wash of the FGD area block. The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain. Sewer lines (Cast Iron), interconnected by sewer manholes (RCC) at regular intervals (not exceeding 30 meter centre to centre) shall be provided to dispose off sewage from FGD area to the nearest available manhole of the owner. The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr. The maximum velocity for pipe drains and open drains shall be limited to 2.4m/sec and 1.8 m/sec. respectively. However, minimum velocity of 0.6m/sec. for self-cleansing shall be ensured. Bed slope not milder than 1 in 1000 shall be provided. The open drains shall be open rectangular drains of RCC unless required otherwise due to functional requirement. RC box culverts shall be provided at rail, road or other crossings. Sewers shall be designed for a minimum self-cleansing velocity of 0.75m/sec and the maximum velocity shall not exceed 2.4m/sec.				
22.00.00	Statutory Requirements Bidder shall comply with all the applicable statutory rules pertaining to Factories Act, Fire Safety Rules at Tariff Advisory Committee. Water Act for pollution control, Explosives Act, etc.				
<table><tr><td>LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE</td><td>TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2</td><td>SUB-SECTION-IV-D CIVIL WORKS</td><td>PAGE 41 OF 69</td></tr></table>		LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 41 OF 69
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 41 OF 69		

CLAUSE NO.	TECHNICAL REQUIREMENTS			
23.00.00	Provisions of safety, health and welfare according to Factories Act shall be complied with. These shall include provision of continuous walkways along the crane - girder level on both sides of building, comfortable approach to EOT crane cabin, railing, fire escape, locker room for workmen, pantry, toilets, rest room etc. Provisions for fire proof doors, number of staircases, fire separation wall, lath plastering/encasing the structural members (in fire prone areas), type of glazing etc. shall be made according to the recommendations of Tarrif Advisory Committee. Statutory clearances and norms of State Pollution Control Board shall be followed. Bidder shall obtain approval of Civil/Architectural drawings from concerned authorities before taking up the construction work.			
	INSPECTION, TESTING AND QUALITY CONTROL Sampling and testing of major items of civil works viz. earthwork, concreting, structural steel work (including welding), piling, sheeting, etc. shall be carried out in accordance with the requirements of this specification. Wherever nothing is specified relevant Indian Standards shall be followed. In absence of Indian Standard equivalent International Standards may be used. The Bidder shall submit and finalise a detailed field Quality Assurance Programme before starting of the construction work according to the requirement of this specification. This shall include frequency of sampling and testing, nature/type of test, method of test, setting of a testing laboratory, arrangement of testing apparatus/equipment, deployment of qualified/experienced manpower, preparation of format for record, Field Quality Plan, etc. Tests shall be done in the field and/or at a laboratory approved by the Engineer. The Bidder shall furnish the test certificate from the manufacturer's of various materials to be used in the construction.			
24.00.00	CONCRETE All R. C. C. works to the done under this specification, unless specified otherwise shall be design mix concrete. Minimum grade of concrete for various structures shall be as follows: a) M25 - For all underground / sub-structural/ super-structure R. C. C. work. b) M30- For Block Foundation c) M35- For spring supported RCC deck Minimum 75 mm thick P.C.C M-7.5 shall be provided as mud mat below all foundations. For concreting of underground structures requiring water tightness, plasticizer cum water proofing admixture shall be added to the concrete mix. Both coarse and fine aggregates shall conform to IS: 383 for concrete, shotcreting etc. unless otherwise mentioned.			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 42 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
25.00.00	Excavation, Backfilling, Disposal and Stacking of materials Details		
25.01.00	Excavation in Soil Excavation for foundation shall be to the bottom of lean concrete and as shown on drawing or as directed by the Engineer. The bottom of all excavations shall be trimmed to required levels and when excavation is carried below such levels by error, it shall be brought back to the specified level by filling with concrete of nominal mix 1 : 3 : 6 (cement: coarse sand: 40 mm down aggregates), as directed by the Engineer. The Contractor shall ascertain for himself the nature of materials to be excavated and the difficulties, if any, likely to be encountered in executing this work. Cofferdams, sheet piling, shoring, bracing to maintain suitable slopes, draining etc. shall be provided and installed by the contractor, to the satisfaction of the Engineer. Surplus excavated materials shall be disposed off by the contractor at locations up to a lead of 5 kms from the plant boundary wall as directed by the engineer. The Contractor shall have to constantly pump out any water collected in excavated pits and other areas due to rain water, springs etc. and maintain dry working conditions at all times until the excavation, placement of reinforcement, shuttering, concreting, Backfilling is completed. The Contractor shall remove all slush/muck from the excavated areas to keep the work area dry. The Contractor, if required, shall employ sludge pumps, for this purpose. For other details, excavation clauses as given at “Foundation system and Geotechnical Data Chapter” given at “Project Information section” of technical specification, are to be referred.		
25.02.00	Excavation in Rock For the work of excavation in rock, Contractor shall engage specialised agency having experience of excavation in rock involving wedging and blasting. The agency shall be subject to approval of Engineer and the Contractor shall furnish details of relevant experience in support while seeking approval for the agency. Blasting shall be resorted to only with the written permission of the Engineer. All the statutory laws, (Explosives Act etc.) rules, regulations, Indian Standards etc. pertaining to the acquisition, transport, storage, handling and use of explosives etc. shall be strictly followed. The contractor shall obtain Licenses from Competent Authorities for undertaking blasting work as well as for procuring, transporting to site and storing the explosives as per Explosives Act. The Contractor shall be responsible for the safe transport, use, custody and proper accounting of the explosive materials. Surplus excavated materials shall be disposed off by the contractor at locations up to a lead of 5 kms from the plant boundary wall as directed by the engineer. The Contractor shall have to constantly pump out any water collected in excavated pits and other areas due to rain water, springs etc. and maintain dry working conditions at all times until the excavation, placement of reinforcement, shuttering, concreting, backfilling is completed. For other details for excavation in rock, clauses as given at		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS
PAGE 43 OF 69			

CLAUSE NO.	TECHNICAL REQUIREMENTS		
25.03.00	“Foundation system and Geotechnical Data Chapter” given at “Project Information section” of Technical specification, are to be referred. Backfilling, Disposal and Stacking of materials Backfilled earth shall be compacted as per “Foundation system and Geotechnical Data Chapter” given at “Project Information section” of technical specification. However, the backfill under the rail lines and roads shall be compacted to minimum 95 % of the standard proctor density at OMC unless otherwise stated by rail Authorities. The contractor is required to excavate upto any depth as shown on the drawings or as directed by the Engineer. Lifting of excavated materials shall be done either by manual or mechanical or both means if called for by the Engineer. The disposal / stacking areas for excavated materials shall be indicated by the Engineer. The carriage of excavated materials shall be done by the methods mentioned below: The excavated materials shall be carried beyond the initial lead of 50 m but upto 500 m by manual / animal labour or by mechanical means. If directed by the Engineer this material shall be used directly for filling purposes. For leads exceeding 500 m the Contractor shall transport the excavated materials by mechanical means only and as directed by the Engineer. The Contractor may be allowed to carry materials through Kuccha roads. Providing and maintaining of the Kuccha roads shall be the responsibility of the Contractor. The transported material shall be neatly stacked as directed by the Engineer. Some excavated materials required for filling purposes, may have to be carried upto a lead of 500 m and stacked as per instructions of the Engineer. Excavated materials carried beyond 500 m shall normally be for disposal purpose only. Double handling of materials shall be avoided as far as possible. However, depending on site condition excavated materials carried beyond a lead of 500 m may also be required to be brought back for filling purpose. Materials to be used for filling purpose shall be stone, sand or other inorganic materials and they shall be clean and free from shingle, salts, organic matter, large roots and excessive amount of sod, lumps, concrete or any other foreign substances which could harm or impair the strength of the substances in any manner. All clods shall be suitably broken to small pieces. When the material is mostly rock boulders, these shall be broken into pieces not larger than 150 mm size before backfilling and shall be backfilled in layers of 300mm interstices filled with sand. In case of broken rock boulders used for back filling, the top cover shall be with 1.0m thick soil. The layers of rock boulders, interstices filled with sand shall be compacted by plate vibrators. Sand used for filling shall be clean, medium grained and free from impurities. Fines less than 75 microns shall not be more than 20%. In any case, the materials to be used for filling purposes shall have the prior written approval of the Engineer.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 44 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
26.00.00	In case the materials have to be brought from pits / quarries, then it shall be the Contractor's responsibility for identification of such quarry areas, obtaining approval from their use from concerned authorities, excavation / quarrying loading and carriage of such material, unloading and filling at specified locations. The Contractor shall pay any fees, royalties etc. that may have to be paid for utilisation of borrow areas. GALVANISING All burrs and irregular edges of the structural steel members to be galvanised shall be ground smooth before galvanising. Purity of Zinc to be used for galvanising shall be 99.5 % as per IS : 209 (latest edition). The weight of the zinc coating shall be at least 610 Gms. / m² unless noted otherwise.
27.00.00	CHEMICAL INJECTION GROUTING Minimum, 12 mm dia (NB) threaded nozzle of suitable length, shall be provided over the surface and along the construction joint line in a grid pattern at a spacing not exceeding 1.5 m c / c before concreting operation. Adequate precaution shall be taken to keep the nozzles plugged at both ends to prevent them from getting closed by concrete. For fixing of any nozzle in set concrete suitable size hole shall be drilled, preferably by using percussive hammer drill electrically operated, in grid pattern and grouting nozzle shall be fixed in these holes. After the nozzles are fully set, neat cement slurry admixed with water soluble non - shrink polymer / monomer based chemical shall be injected through the net - work of nozzles with low pressure grout pumps at a pressure of about 2.0 Kgs. / cm². Cement slurry shall be prepared by mixing cement with non-shrink polymer/monomer @ 500 gm/50 kg bag of cement and water, ensuring that Water: Cement ratio does not exceed 2 (by weight). Wetter the structure, lesser should be the water cement ratio. The property of the polymer/monomer should be such that when it is mixed with water @0.5% by weight of water, the viscosity of the resultant solution (water and polymer/monomer) should not be more than 1.2 centipoises. Plasticizing agent shall be added wherever required. The grouting shall be started at very low pressure and increased gradually to a required pressure. The grouting shall continue, till the hole refuses to take any further grout, even at an increased pressure. Applied pressure shall not be more than the designed strength of the concrete. After completion of grouting operation, the nozzles shall be sealed properly to the satisfaction of the Engineer.

CLAUSE NO.	TECHNICAL REQUIREMENTS			
28.00.00	POLYMER MODIFIED CEMENTITIOUS COATING			
28.01.00	Materials Modified liquid polymer blend shall be a dispersion containing 100 % acrylic based polymer solids. Polymer shall be mixed in the ratio of 1 cement: 0.5 polymer (for minimum solid content of polymer 30%). Portland cement based dry powder. Clean, fine specially prepared quartz sand approximately 0.6 mm size.			
28.02.00	Mixing The liquid polymer shall be stirred well and cement based powder shall then be added slowly to make a Slurry Mix. For preparation of Brush Topping Mix, quartz sand shall be added slowly and mixed well till a homogeneous mixture is obtained. The mix shall be used within half an hour of the preparation. Addition of quartz sand may not be necessary, in case dry power contains the same.			
28.03.00	Properties of Coating It must adhere to wet surface. It should develop adequate bond strength, with the concrete surface, not less than 2 N / Sq. mm. Co - efficient of permeability shall be about 5×10^{-10} Cm / Sec. Water absorption after continuous soaking shall not be more than 1 %. The materials shall be permeable under water vapour. The material shall be resistant to acids and alkalies present in the soil and underground water with normal pH value between 4 and 14. The co - efficient of thermal expansion of the material shall be close to that of concrete.			
28.04.00	Application The concrete surface shall be cleaned and made free from grease, oils or loosely adhered particles. The surface shall be damp without any free water. For exterior underground part, application (b) pertaining to Brush topping Mix shall be followed. (a) For Slurry Mix A minimum of 2 coats shall be applied on the surface. The first coat being applied, when the surface is still damp and left to harden for 4 to 6 hours. After 4 to 6 hours of the application of second coat, it shall be finished by rubbing down with a soft dry			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 46 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
29.01.02	Flooring of tiles / stone shall be fixed with 18 mm thk cement sand mortar 1:4, above PCC under bed (M 20 (with graded aggregate of nominal size 12.5mm) design mix)			
	Flooring of Concrete hardener topping shall be provided above the PCC underbed (M 20 (with graded aggregate of nominal size 12.5mm) design mix).			
29.02.00	Wherever specified Heavy duty ceramic tiles of size 300x300x7 mm thick (minimum) of reputed manufacturer (Kajaria, Orient, Johnson or equivalent) of approved finish shade and colour to be used. Vitrified ceramic tiles wherever specified shall be 600x600 mm with minimum 9.5 mm thickness and of reputed manufacturer (Kajaria, Johnson, Orient or equivalent).			
	Floor finish & skirting: The nominal thickness of floor finish shall be 50 mm. Floors of toilets, pantries / kitchen shall be finished with Heavy duty (grade-5) dust pressed ceramic tiles 300mmx300mm x7 mm thick as per IS:15622, including pointing the joints with white cement mixed with matching pigment, of approved make, size & colour shade. (1) Floors of Office Room, Labs, Control Rooms, RIO Rooms and all other A/c Room shall be finished with Mirror polished Vitrified ceramic tiles (minimum 9.5 mm thk) with 3 mm groove joints as per approved pattern, pointed neatly with 3X4mm stainless epoxy grout SP- 100 of Laticrete or approved equivalent in approved colour to match colour of tile. (2) Suitable supporting arrangement shall be provided with M.S. angles / channels on cable trenches in MCC and Control rooms for mounting Control panels / MCC. (3) In rest of the areas, IPS (Cement concrete flooring) with Concrete hardener topping shall be 12mm thick with ordinary grey cement using uniformly graded, properly treated iron particles shall be provided. (4) Floors and sides of under ground RCC structures like valve pits, trenches and tanks shall have simultaneous (integral) neat cement finish at the time of concreting. (5) The interconnecting walkway between various structures, buildings and facilities shall be finished with 22 mm chequered concrete tiles at top. 1000 mm wide walkway of 22mm thick chequered concrete tiles shall be provided on terrace for maintenance purpose, in all RCC /Metal deck roof buildings. (6) Skirting in general shall be 150mm high, Dado in toilet, kitchen & pantry shall be up to specified height (up to 2200 mm for toilets, up to 600 mm high above counter top in kitchen and pantry area). The dado height shall be measured from finished floor level. Skirting and Dado shall match with the floor finish. (7) Battery Room shall be provided with Acid resistant tile on horizontal and vertical surfaces, at all levels for all type of works, including One coat of bitumen primer followed by 12 mm thick bituminastic layer, 20 mm thick Acid Resistant tiles, 6 mm thick under-bed by potassium silicate mortar, 6 mm thick pointing of joints of tiles with acid/alkali resistant epoxy/furane mortar up			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 48 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	to a depth of 20 mm and bituminastic end sealing. 1200 mm high dado on wall shall be with 12 mm thk Acid resistant tiles of the similar finish and the joints to be finished as per flooring tiles, with the rest of wall height and ceiling finished in chemical resistant paint (chlorinated rubber based). (8) Well polished 18 mm thick Kota stone jointed with neat cement slurry mixed with pigment to match the shade of the stone including rubbing and cleaning, complete, to be provided in entrance area, entrance steps, Entrance area, staircases (tread, riser, landings, skirting).		
29.03.00	Sunken RCC slab shall be provided in false flooring area and toilet, Kitchen and pantry, so as to keep the finished floor level of these areas same as that of the surrounding area.		
29.04.00	Water proofing treatment to be provided on sunken portion of all vertical and horizontal surfaces of depressed portions of all toilets, W.C., kitchen, Pantry and the like consisting of : (i) Ist course of applying cement slurry @ 4.4 kg/sq.m mixed with water proofing compound conforming to IS 2645 in recommended proportions including rounding off junction of vertical and horizontal surface. (ii) IInd course of 20 mm cement plaster 1:3 (1 cement: 3 coarse sand) mixed with water proofing compound in recommended proportion including rounding off junction of vertical and horizontal surface. (iii) IIIrd course of applying blown or residual bitumen applied hot at 1.7 kg. per sq.m of area. (iv) IVth course of 400 micron thick PVC sheet. (Overlaps at joints of PVC sheet should be 100 mm wide and pasted to each other with bitumen @ 1.7 kg/sq.m).		
29.05.00	Acid / Alkali Resistant Treatment: Acid / alkali resistant lining treatment shall be provided in different areas as follows: Neutralization Pit: The walls shall be provided with one coat of bitumen primer, followed by 18 mm thick bitumastic layer, 115 mm thick A.R. bricks, 6 mm thick under bed of potassium silicate mortar, pointing the joints of bricks with acid / alkali resistant epoxy / furane mortar upto a depth of 20 mm and bitumastic end sealing. Suitable plasters shall be provided with A.R. bricks at regular intervals depending upon the height of lining, as per the specification. The floor of neutralization pit shall be provided with acid / alkali resistant lining treatment as given in the above para, except that the 115 mm thick A.R.tile layer shall be replaced by 75 mm thick A.R. tile layer and pilasters shall be omitted. The ceiling of neutralization pit shall be provided with one coat of epoxy primer followed by 2 coats of epoxy paint (150 micron). Acid / Alkali storage area / projections above the floor, pedestals projecting from the floor / saddles. : The floor shall be provided with one coat of bitumen primer followed		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 49 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
	by 12 mm thick bitumastic layer, 20 mm thick A.R. tiles, 6 mm thick under - bed by potassium silicate mortar, 6mm thick pointing of joints of tiles with acid / alkali resistant epoxy / furane mortar up to a depth of 20 mm and bitumastic end sealing. Dado of 12 mm thk Acid Resistant tiles up to 1.0M high shall also be provided if applicable in case of walls nearby. Alum/Lime Storage area and first floor of Chemical House : One coat of bitumen primer followed by 12mm thick bitumastic layer, 20 mm thick A.R. tiles, 6 mm thick underbed of potassium silicate mortar, 6mm thick pointing of joints of tiles with acid /alkali resistant epoxy /furane mortar up to a depth of 20 mm and bitumastic end sealing. Alum solution preparation tank: The wall shall be provided with one coat of bitumen primer followed by 12 mm thick bitumastic layer, 75 mm thick A.R. tiles, 6 mm thick underbed by potassium silicate mortar, pointing of joints of tiles with acid / alkali resistant epoxy / furane mortar upto a depth of 20 mm and bitumastic end sealing. The floor shall be provided with acid / alkali resistant lining treatment as given in the above para except that the 75 mm thick A.R. tile layer shall be replaced by 12 mm thick A.R. tile layer. Basket of Alum solution preparation tank: 5 mm thick epoxy lining over a coat of epoxy primer. Curved surfaces of saddles shall have minimum 12 MM thick bitumastic layer to support the vessel / tanks. Effluent Drains: Acid Resistant lining treatment indicated for the storage area shall be provided on the bed as well as walls of the drains with 38 MM AR tiles. The underside of the pre-cast slab cover shall be applied with one coat of epoxy primer and two coats of epoxy coating, total DFT 150 microns. Lime tank: Two coats of bitumen paint conforming to IS: 9862, with total DFT 150 microns.
29.06.00	Walls
29.06.01	All walls shall be non-load bearing infilled panel walls. All external walls shall be minimum one brick thick masonry wall.
29.06.02	All external and internal walls shall be with minimum one brick masonry (230 or 250 mm) including toilet walls. Toilet partition low height walls shall be minimum half brick masonry.
29.06.03	For all air conditioned areas/ rooms, wherever metal cladding is envisaged as cladding material, additional brick masonry wall (230mm thick) shall also be provided in addition to metal cladding for effective air conditioning. This brick wall shall be plastered & painted as specified elsewhere in the specification.
29.06.04	RCC transoms and mullions of size 115x115mm with suitable reinforcement shall be provided wherever necessary to reinforce the brickwork.
29.06.05	50 mm thick DPC in Cement concrete (M-20) with water proofing compound followed by two layers of bitumen coating 85/ 25 grade as per IS: 702 @ 1.7 kg/ sq.m. shall be provided at plinth level before starting the masonry work.
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 50 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
29.06.06	The bricks shall be laid with cement mortar (1:6) for one brick thick walls and (1:4) for half brick thick walls IS: 1905, IS: 2212 and SP -- 20 shall be followed for brick work design and construction.		
29.07.00	Plastering		
29.07.01	External (rough) surface of walls shall be plastered with 18 mm thick cement plaster, consisting first (base) layer of 12 mm thick plaster in cement sand mortar (1:6) and second (finishing) layer of 6 mm thick plaster in cement sand mortar (1:4). The internal (smooth) surface of walls shall have 12 mm thick plaster in cement sand mortar (1:6). All external / internal RCC surfaces including RCC parapet walls shall be provided with minimum 12mm thick plaster in cement sand mortar (1:4) except walls of underground structures like cable trenches / valve pits etc.		
29.07.02	All exposed faces of R.C.C. walls of structures, buildings and facilities shall have minimum 12 mm thick cement sand plaster 1:6.		
29.07.03	All RCC ceilings (except areas provided with false ceilings and cable vault ceiling) shall be provided with 6 mm thick cement sand plaster 1:4.		
29.07.04	All plastering work shall conform to IS: 1661.		
29.08.00	Painting		
29.08.01	All painting on masonry or concrete surface shall preferably be applied by roller. If Applied by brush then same shall be finished off with roller.		
29.08.02	All paints shall be of approved make including chemical resistant chlorinated rubber paint.		
29.08.03	Minimum two finishing coats of paint shall be applied over a coat of primer.		
29.08.04	The thinner shall not be used with textured paint (Sandtex Matt or equivalent) finish.		
29.09.00	Internal Finish		
29.09.01	All Air conditioned areas shall have 2mm of polymer based water resistant putty (wall putty) to given an even and smooth surface.		
29.09.02	Toilet, Pantry / Kitchen areas shall have dado with Designer ceramic tiles, 300x200mm (matt finish) upto 2.2 m height and shall match with floor finish. Above dado, Acrylic distemper shall be applied.		
29.09.03	Areas coming in contact with chlorine fumes or acid / alkali shall have two coats of acid / alkali resistant chlorinated rubber paint over suitable primer on walls above dado & ceiling. The paint shall be of approved colour shade and make.		
29.10.00	External Wall Finish One pack, ready mix and ready to use, resin / polymer bonded granular textured coating finish of 2.5 mm (natural coloured graded stone chips), of approved colour, and shade for all types of plastered and / or exposed concrete surface, in all kinds of works, at all levels, including preparation of surface, preparation of working drawing,		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 51 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	labour, material, equipment, handling, transportation, mixing, laying, applying finishing, testing, curing, making grooves, scaffolding, staging, etc., all complete, as per specifications, drawings and instructions of the Engineer-in-charge. Toe wall of chain link fencing shall be provided with two coats of Acrylic Smooth Exterior Paint The finish shall be of approved colour shade and make.			
29.11.00	Ceiling Finish			
	Ceiling shall have min. two (2) coats of Acrylic distemper except AC areas & Battery room.			
29.11.01	For painting on concrete, masonry and plastered & surface, IS: 2395 shall be followed. For painting on steel work and ferrous metals, IS: 1477 shall be followed.			
29.11.02	Fire resistant transparent paint (confirming to IS: 162) shall be provided on all wood work, over French police or flat oil paint. French polish shall confirm to IS : 348. Flat oil paint shall confirm to IS: 1237.			
29.12.00	Doors, Windows, Ventilators, Louvers, Rolling Shutters & Glazing			
29.12.01	Adequate Doors, Windows, Louvers and Ventilators shall be provided for proper lighting and ventilation of all buildings. The area of windows shall be at least 10% of the floor area of the respective building. In addition to the above, wherever room height is more than 3.5 m, a band of ventilators of 600 mm height (minimum) shall be provided at the top.			
29.12.02	Unless specified all doors, of air conditioned areas, entrance lobby of all buildings shall have electro colour coated (anodised) aluminium frame work with glazing. Windows, ventilators & partitions of all buildings shall have electro colour coated (anodised) aluminium frame work with glazing. All doors of toilet, kitchen, pantry & store areas shall be of factory made pre - laminated solid core flush door shutters, as per IS: 2202 (Part-II) with pressed steel door frame. Control room shall have Aluminium glazed door & partitions. All other doors (unless otherwise specified) shall be of steel.			
29.12.03	All steel doors shall consist of double plate flush door shutters. The door shutter shall be 45 mm thick with two outer sheets of 18 G rigidly connected with continuous vertical 20 G stiffeners at the rate of 150 mm centre to centre. Side, top and bottom edges of shutters shall be reinforced by continuous pressed steel channel with minimum 18 G. The door shall be sound deadened by filling the inside void with mineral wool. Doors shall be complete with all hardware and fixtures like door closer, tower bolts, handles, stoppers, aldrops, etc.			
29.12.04	Wherever functionally required, rolling shutters of suitable size approved by the Owner, with suitable operating arrangement manual/ electric shall be provided to facilitate smooth operations. Rolling shutters shall conform to IS: 6248.			
29.12.05	All windows and ventilators at ground floor level shall be provided with suitable anodised aluminum grill.			
29.12.06	Fire proof doors with panic devices shall be provided at all fire exit points as per the requirements. However minimum Fire rating shall be 2 hours. These doors shall be double cover plated type with mineral wool insulation.			
29.12.07	Hollow excluded Section of minimum 2 mm wall thickness as manufactured by INDAL, Jindal, Hindalco or equivalent shall be used for all Aluminium doors, windows, ventilators and Partitions.			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 52 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS												
29.12.08	The doors, Windows & ventilators frame shall be of suitable size & thickness for fixing the glazing. The Glazing thickness shall be minimum 6 mm thk clear toughened glass for all glazed doors, windows, ventilators & partitions. Windows in air conditioned areas shall be provided with 24mm thick hermetically sealed composite double glazing.												
29.12.09	Doors and windows on external walls shall be provided with sunshade over the openings with width 600 mm more than the opening width. The projection from the finished face of the wall for sunshade shall generally be 450 mm over window openings, 750 mm over door openings and 900 over Rolling shutters, or as decided and approved by the Engineer.												
29.12.10	Float glass or flat transparent sheet glass shall conform to IS: 2835.												
29.12.11	All glazing work shall conform to IS: 3548.												
29.12.12	Windows in conveyor gallery shall be provided with welded wire fabric of 1.6mm thick wire as per IS: 4948 and 12mm x 30mm mesh size.												
30.00.00	WATER SUPPLY, DRAINAGE AND SANITATION												
30.01.00	Polyethylene water storage tank conforming to IS: 12701 shall be provided (for the use of toilet, pantry and kitchen) over the roof, with adequate capacity depending on the number of users and 8 hours requirement complete with all fittings including float valve, stop cock etc. The capacity of tank shall be calculated minimum 500 liters, per toilet, pantry and kitchen												
30.02.00	Galvanised MS pipe of medium class conforming to IS: 1239 shall be used for internal piping works for potable water supply.												
30.03.00	Sand C.I. pipes with lead joints conforming to IS: 1729 shall be used for sanitary works above ground level.												
30.04.00	The facilities provided in the toilet block shall depend on the number of users. However, minimum facilities to be provided shall be as stipulated below. IS: 1172 shall be followed for working out the basic requirements for water supply, drainage and sanitation. In addition, IS: 2064 and IS: 2065 shall be also be followed.												
30.05.00	Each toilet block shall have the following minimum facilities. Unless specified all the fittings shall be of chromium plated brass (fancy type). The common toilet area shall have finished floor level at 15 mm below the finished floor level of surrounding area. Following minimum fittings & fixtures together with associated plumbing works shall be provided as specified below. <table><tr><th>Sl. No.</th><th>Type of Fitting / Fixtures</th><th>Gents Toilet</th></tr><tr><td>i)</td><td>1 no wall mounted coloured glazed vitreous china European water closet with flush valve.</td><td>1 No.</td></tr><tr><td>ii)</td><td>Coloured glazed vitreous china flat back lipped urinals with photo voltaic controlled automatic flushing system including all requisite fittings and fixtures</td><td>1</td></tr><tr><td>lii)</td><td>Wash Basin (oval shape) with photo voltaic control system and all requisite fittings and fixtures to be fixed on concrete platform finished with 18mm thick first</td><td>1 No.</td></tr></table>	Sl. No.	Type of Fitting / Fixtures	Gents Toilet	i)	1 no wall mounted coloured glazed vitreous china European water closet with flush valve.	1 No.	ii)	Coloured glazed vitreous china flat back lipped urinals with photo voltaic controlled automatic flushing system including all requisite fittings and fixtures	1	lii)	Wash Basin (oval shape) with photo voltaic control system and all requisite fittings and fixtures to be fixed on concrete platform finished with 18mm thick first	1 No.
Sl. No.	Type of Fitting / Fixtures	Gents Toilet											
i)	1 no wall mounted coloured glazed vitreous china European water closet with flush valve.	1 No.											
ii)	Coloured glazed vitreous china flat back lipped urinals with photo voltaic controlled automatic flushing system including all requisite fittings and fixtures	1											
lii)	Wash Basin (oval shape) with photo voltaic control system and all requisite fittings and fixtures to be fixed on concrete platform finished with 18mm thick first	1 No.											
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 53 OF 69										

CLAUSE NO.	TECHNICAL REQUIREMENTS
	600x600mm with supporting system as per manufacture guidelines. 50 mm thick mineral wool insulation (conforming to IS : 8183) shall be provided with as under deck insulation). Additional hangers and height adjustment clips shall be provided for return air grills, light fixtures, Air conditioning ducts etc. Minimum headroom below false ceiling shall be 3.0 m. (e.) Under - deck insulation shall be provided on the ceiling (underside of roof slab) and underside of floor slab of air - conditioned areas depending upon the functional / air - conditioning requirements. The under - deck insulation shall consist of 50 mm thick mineral wool insulation conforming to IS : 8183 backed with 0.05 mm thick aluminium foil & 24 G x 25 mm mesh wire netting and shall be fixed to ceiling with 24 G wire ties and suitable fixing arrangements. (f.) Parapets, chajjas, window / door heads, architectural facias, fins etc., shall be provided with drip course in cement mortar (1 : 3). (g.) 150mm thick fillets at junction of roof slab / chajja slab and parapet / vertical walls shall be provided with cast - in - situ cement concrete 1 : 2 : 4 nominal mix, followed by 12 mm thick cement sand plaster (1 : 4). (h.) Suitable provision shall be made for fixing of ceiling fans in office areas of different structures, buildings and facilities.
31.00.00	CORROSION PROTECTION
31.01.00	GENERAL
	(a) All Steel structures shall be provided with painting as given in the specification. Further, painting system shall also meet the requirements of Corrosivity category C3 (durability High) as per ISO 12944. Painting system for steel surfaces embedded in Concrete is given separately. (b) All Painting shall be done as per technical specification. Painting scheme shall be submitted by the bidder for approval of employer. (c) All steel structures shall be designed by following basic design criteria in ISO 12944 Part 3. However, where it is not feasible to follow the design criteria given in ISO 12944 Part 3 where the steel surface are inaccessible for application of protective coating, corrosion allowance of 1.5 mm shall be kept in thickness(over the design thickness) of structural steel members. d) Painting scheme shall be resubmitted by the Bidder for approval of employer.
31.02.00	PAINTING OF STEEL SURFACES EMBEDDED IN CONCRETE: a) For the portion of Steel surfaces embedded in Concrete, the surface shall be prepared by Manual Cleaning and provided with Primer Coat of Chlorinated Rubber based Zinc Phosphate Primer of Minimum 50 Micron Dry Film Thickness (DFT). b) All threaded and other surfaces of foundation bolts and its materials, insulation pins, Anchor channels, sleeves, etc. shall be coated with temporary rust preventive fluid and during execution of civil works, the dried film of coating shall be removed using organic solvents.
31.03.00 CONCRETE)	PAINTING OF STEEL SURFACES (OTHER THAN THOSE EMBEDDED IN
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 55 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
31.04.00	a) All steel surfaces shall be provided with two component moisture curing zinc (ethyl) silicate primer coat (having minimum 80% of metallic Zinc content in dry film, solid by volume minimum 60% ±2%) of minimum 70 micron DFT to be applied over blast cleaned surface conforming to Sa 2 ½ finish of ISO 8501-1 with surface profile 40-60 Micron. The primer coat shall be applied in shop immediately after blast cleaning by airless spray technique. Zinc dust composition and properties shall be Type-II as per ASTM D520-00. b) Primer coat shall be followed with the application of Intermediate coat of two component polyamide cured epoxy with MIO Content (containing lamellar MIO minimum 30% on pigment, solid by volume minimum 80% ±2%) of minimum 100 micron DFT. This coat shall be applied in shop after an interval of minimum 24 hours (from the application of primer coat) by airless spray technique. c) Intermediate coat shall be followed with the application of finish coat of two-pack aliphatic Isocyanate cured acrylic finish paint (solid by volume minimum 55% ±2%) with Gloss retention (SSPC Paint Spec No 36, ASTM D 4587, D 2244, D 523) of Level 2 (after minimum 1000 hours exposure, Gloss loss less than 30 and colour change less than 2.0 ΔE) and minimum 70 micron DFT. This coat shall be applied shop after an interval of minimum 10 hours and within six (6) months (from the completion of Intermediate coat), Colour and shade of the coat shall be as approved by the Employer. Notes: 1. For Primer, high quality surface preparation is necessary and good amount of moisture is required for proper curing. Below 70 % relative humidity, curing time may go up to 7 days or more. In such a case additional water sprinkling may be ensured for completion of curing. Additionally Inorganic zinc silicate cannot be recoated; even with itself. Typically it should be used when coating bare steel surface for first time. 2. The most frequent problem associated when top coating Primer is bubbling/pin holing especially with non-weathered zinc silicate coatings. To a great extent, this bubbling of finish paint can be eliminated by applying a mist coat of intermediate/topcoat as the first pass of the product, allow the bubbles to subside and then apply a full coat, as required. 3. In case top coating of zinc silicate with epoxy/polyurethane coatings, is expected to be delayed, it is advisable to use a suitable tie coat to avoid formation of white rust. However, if white rust forms then clean the surface with high pressure water, dry and apply the subsequent coats as required. 4. Touch up paintings on damaged areas: Surface preparation by manual tools, wire brush/ emery paper etc. Minimum 6 inches peripheral area, adjoining to damaged area to be covered. If metal surface is exposed, it is to be painted with Zinc rich epoxy (70 micron) or suitable primer with existing paint scheme. If primer is intact, intermediate & top coat to be done with specified DFT in scheme.		
	COATING FOR MILD STEEL PARTS IN CONTACT WITH WATER. a) All mild Steel parts coming in contact with water or water vapour shall be hot dip galvanised. The Minimum Coating of Zinc shall be 610 Gms / Sq. M. for galvanised Structures and shall comply with IS: 4759 and other relevant Codes. Galvanising shall be checked and tested in accordance with IS: 2629.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 56 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	b) The galvanising shall be followed by the application of an etching Primer and dipping in black bitumen in accordance with BS: 3416, unless otherwise specified.			
31.05.00	Gratings All gratings shall be blast cleaned to Sa 2 ½ finish or cleaned by acid pickling as per ISO 8501-1 and shall be hot dip galvanized at the rate of 610 Gms / Sq. M.			
31.06.00	Hand Railings and Ladders All Mild steel handrails and ladders shall be galvanised at the rate of 610 Gms / Sq. as per IS: 4736. However, Stainless steel handrails shall be provided as specified in General Architectural Specification clause 9.0.0.			
31.07.00	Sea Worthiness All Steel Sections and fabricated Structures, which are required to be transported on sea, shall be provided with anti corrosive Paint before shipment to take care of sea worthiness.			
31.08.00	For Reinforced Concrete Work. i) The protection for concrete sub-structure shall be provided based on aggressiveness of the soil, chemical analysis of soil/sub-soil water and presence of harmful chemicals/salts. ii) The protection to super structure shall depend on exposure condition and degree of atmospheric corrosion. This shall require use of dense and durable concrete, control of water cement ratio, increase in clear cover, use of special type of cement and reinforcement, etc., coating of concrete surface, etc., Bidder shall furnish the details of corrosion protection measures.			
32.00.00	Miscellaneous			
32.01.00	Ordinary form work shall be used in roofs and floor slabs in transfer houses, footings, pedestals, cable trenches, pits etc., Plywood form work shall be used for all over ground exposed work like columns, beams, floors and ceilings in control room and M. C. C. buildings.			
32.02.00	Monorail girders and fixtures shall be provided for monorails at the locations as required and as described elsewhere in these specifications or drawings. Monorail openings in the walls shall be provided with steel frame doors preferably sliding type or otherwise open able inside, access platforms and ladders.			
32.03.00	Steel frame around openings in roof and on external walls for mounting of exhaust fans shall be provided.			
32.04.00	Ready mix non - shrink cementitious grout of reputed manufacturer as approved by the Employer shall be used for grouting of block outs and foundation bolts, underpinning of base plates and machine bases. Crushing strength of grout shall be one grade higher than the foundation concrete. Minimum crushing strength shall be 30 N / mm ² unless higher strength requirement is specified by the equipment supplier or the grout manufacturers.			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 57 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
32.05.00	The bottom of steel in case of cable / pipe galleries and trestles shall be generally 3m above the ground except for rail / road crossing where it shall be 8m above the rail top / road crest/ground. Further in bunker areas it shall be 8 m above the ground.
32.06.00	Polysulphide Sealing Compound shall be two-part polysulphide sealant and shall be from approved manufacturer, conforming to IS : 12118. Materials shall consist of polysulphide polymer and a curing agent. Gun grade material shall be used unless otherwise specified. The application of the sealant shall be strictly followed as per manufacturer's guidelines.
33.00.00	SHOTCRETING
33.01.00	General Requirements
33.01.01	Generally, shotcreting shall be done in accordance with IS : 9012.
33.01.02	Reinforcement for shotcreting shall be as detailed below, unless specified otherwise. Reinforcement in one direction consisting of 6 mm M. S. bars at 750 mm c / c shall be connected to the lugs for fastening of the wire fabric. This shall be used in case of 50 mm or above thick shotcreting.
33.01.03	Wire fabric conforming to IS : 1566 shall be used as reinforcement and shall consist of wire, 3 mm diameter, spaced 50 mm both ways and shall be electrically cross welded. Wire fabric shall be securely tied to 6 mm bars for 50 mm thickness. Adjacent sheet of wire fabric shall be lapped at least 100 mm and tied.
33.01.04	Clear cover to reinforcement mesh shall not be less than 15 mm.
33.01.05	Minimum thickness of shotcreting shall be 50 mm. for abrasion resistant work and 25 mm for ordinary surface protection work.
33.02.00	Material Generally, the materials shall be in accordance with aggregates specification given hereunder.
33.02.01	Fine aggregate shall consist of natural sand or crushed stone from a known source and shall be strong, hard, coarse, sharp, chemically inert, clean and free from any coating. It shall be free from clay, coal or coal residue, organic or any other impurities that may impair the strength or durability of the concrete and shall conform to IS : 383.
33.02.02	Fine aggregate (Sand) shall be well graded and particles shall range in size within the following limits. The Engineer, may approved the use of any other grading as per requirement or as per IS : 9012.
33.02.03	The fineness modulus shall be preferably between 2.5 and 3.3. Any other value can be used, with prior approval of the Engineer.
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 58 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
33.03.00	Application
33.03.01	After the placement of reinforcement and / or welded mesh and not more than six hours prior to the application of shotcrete, the surface shall be thoroughly cleaned of all loose materials and dirt. The Contractor shall properly prepare the surfaces, reinforcement and / or welded mesh to receive the shotcrete. Cleaned surfaces shall be wetted not more than hour prior to shotcreting.
33.03.02	The mix as placed on surface shall be one part cement to three parts approved sand by mass. Cement and sand shall be dry mixed; not water shall be added after mixing and before using in the gun. The quantity of water when added shall be only that which is sufficient to hydrate the cement. For average atmospheric conditions, the water cement ratio for shotcrete in place shall be between 0.35 and 0.5 by mass. Suitable admixture shall be used wherever required.
33.03.03	A uniform pressure of not less than 3 Kg/cm ² at the nozzle shall be maintained. Necessary adjustments shall be made to ensure this pressure, taking into account the length of hose and height of the place to be shotcreted, above location of the machine.
33.03.04	The application shall proceed in an upward direction. Beams, stiffeners and intermediate walls, if any, shall be wrapped with wire fabric and completely covered with shotcreting. All rebound shall be removed from the area of application as the work progresses and such rebound material shall not be reused.
33.03.05	As soon as the freshly shotcreted surface shows the first dry patches, a fine spray of water shall be applied to keep too moist. After the surface has hardened, it shall be kept continuously moist for minimum seven days. If there is extreme heat, especially when accompanied by hot winds, the shotcreted surface, immediately upon completion, shall be covered with burlap or similar covering, which must be kept continuously moist for 14 days after shotcreting. The temperature of the lining shall not be permitted to exceed 38°C during placing of concrete.
34.00.00	VIBRATION ISOLATION SYSTEM These specifications are meant for the design, supply and erection of vibration isolation system for supporting crushers.
34.01.00	Supporting Arrangement
34.01.01	For Crushers: The crushers shall be supported on vibration isolation system consisting of steel helical springs and viscous dampers. The supporting arrangement for each crusher shall consist of an R. C. C. deck supported on steel helical spring units and viscous damper units which in turn shall be supported on girders. The girders shall be an integral part of the crusher house building. The part of the structure consisting of the R. C. C. deck, springs and viscous dampers shall hitherto be referred to as "spring supported foundation". The part of the structure, which is below the spring shall hitherto be called "supporting structure".
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 59 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
34.01.02	The Contractor should do the Engineering / design, supply and erection of vibration isolation system consisting of steel helical spring units and viscous dampers supporting the top deck which in turn would support the crushers. The vibrations isolation system supplied shall be of a proven make. The Contractor or his sub - contractor who designs and supplies the system should have designed, supplied and installed such systems for not less than five machines of speeds and unbalance forces comparable to the machine proposed by the vendor. The vibration isolation systems installed by the contractor or his sub - contractor in such machines should have been working satisfactorily for at least five years.		
34.02.00	Scope of Work		
34.02.01	Scope of work shall include the following :		
	(a.) Engineering		
	(1.) Design of the vibration isolation system using steel helical springs and viscous dampers to support an R. C. C. top deck supporting the equipment. This includes the static and dynamic analysis of the vibration isolation system with the R. C. C. top deck and the equipment.		
	(2.) Structural design of the R. C. C. top deck including preparation of General Arrangement drawings, detailed reinforcement drawings, bar - bending schedules etc.		
	(3.) Calculation of loads on the structure supporting the springs and viscous dampers, their points of application and the stiffness requirements of the supporting structure.		
	(4.) Drawings showing embedments and their locations and details on the R. C. C. top deck.		
	(5.) Drawings showing blockouts, recesses etc. on the top deck.		
	(6.) Design of the supporting structure, including preparation of detailed drawings and bill of materials.		
	(b.) Supply including packing and transportation to site		
	(1.) Steel helical spring units and viscous dampers, including associated auxiliaries for installation of the spring units and dampers like steel shims, adhesive pads etc.		
	(2.) Frame (s) for pre-stressing of spring elements.		
	(3.) Suitable hydraulic jacks system including electric pumps, high pressure tubes etc. required for the installation, alignment etc. of the spring units, two extra hydraulic jacks, one hand operated pump and spares for the hydraulic jack system as required.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 60 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	(c.) Erection and Commissioning (1.) Complete erection and commissioning of the vibration isolation system including : (2.) Pre-stressing of spring elements, placing of spring elements in position, checking clearances on the shuttering of the R. C. C. top deck, construction of the supporting structure and the R. C. C. top deck, releasing to pre-stress in spring elements and making final adjustments and alignments after machine installation etc. (3.) The scope of work shall be deemed to include all activities which may not have been explicitly mentioned but are reasonably implied for the successful completion of the work for which these specifications are intended. (4.) This part of the specifications is for vibration isolation system. For the construction of the supporting structure for the crusher and the top deck, the relevant parts of the specification should be referred to. (d.) Documentation (1.) Submission of detailed design calculation, analysis (static and dynamic) and drawings for Employer's acceptance and approval. (2.) Furnishing methodology of providing shuttering and its removal as well as concreting of deck slab, installation of springs and dampers and the sequence of operation. (3.) Furnishing installation and maintenance manual indicating equipment, procedure etc., necessary for installation, maintenance of vibration isolation system. (4.) Furnishing a check list for confirming the readiness of the civil fronts for the installation of vibration isolation system and equipment required at each stage installation. (5.) Bill of materials of various elements such as springs, visco-dampers, with their rating, stiffness etc., included in supply. (6.) Detailed specifications of the vibration isolation system and various items included in the supply and the standard (local or international) to which they conform. (7.) Proposed erection strategy of the entire system.		
34.03.00	~~Design Requirements for Crusher Foundation~~		
34.03.01	~~Dynamic Analysis~~		
	~~Detailed dynamic analysis shall be done for the top deck together with springs and dampers and the natural frequencies and amplitudes of vibration shall be~~		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 61 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS
	determined. A mathematical model of the top deck shall be formulated with three - dimensional beam / plate finite elements for the purpose of analysis with the spring idealised with vertical and horizontal stiffnesses. The mass of the machine together with that of the top deck shall be considered for the analysis. Natural frequencies upto at least 10 % above the operating speed shall be determined and these frequencies shall be checked against the design criteria. Forced response dynamic analysis shall be carried out for the operating condition unbalance forces using a sinusoidal forcing function. Unbalance forces as given by this specifications shall be used for his purpose. The amplitudes shall be checked against the design criteria. The dynamic forces from this analysis shall be used for structural design with a suitable fatigue factor. 34.03.02 Isolation Efficiency The vibration isolation system shall be designed for about 90 % isolation efficiency. 34.03.03 De-coupling A ratio of the least 10 (ten) shall be ensured between the stiffness of the supporting structure and the stiffness of the spring system in the vertical direction to achieve de-coupling between the two (the stiffness of the spring system being lower). This ensures that dynamic analysis of the supporting structure need not be carried out. 34.03.04 Frequency Criteria The frequency criterion has already been laid down implicitly by the isolation efficiency criteria and de-coupling required. The first bending mode frequency of the top deck shall be at least 20 % above the operating speed. 34.03.05 Unbalance Forces for Crushers Unbalance forces arising out of all the following cases shall be considered for checking the design and amplitudes. (a.) Balance quality grade Q 40 as per VDI 2060 - 1966. (b.) One hammer broken condition. The missing hammer shall be assumed to be closest to the crusher non - drive end of the crusher. (c.) Three hammers broken condition. All the three hammers broken shall be assumed to be from the same suspension bar and located at the non - drive end of the crusher. 34.03.06 Amplitude Criteria for Crushers The calculated amplitudes (mean to peak values) shall not exceed following limits under the specified conditions.
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2
SUB-SECTION-IV-D CIVIL WORKS	PAGE 62 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	1) Operating speed of 750 RPM (a.) 150 microns for an unbalance force arising out of balance quality grade Q 40 as per VDI 2060 - 1966. (b.) 300 microns in case of a one hammer broken condition. (c.) Amplitudes need not be checked for a three hammer broken condition. 2) Operating speed of 450 RPM (a.) 200 microns for an imbalance force arising out of balance quality grade Q-40 as per VDI -2060-1966. (b.) 400 microns in case of a one hammers broken condition. (c.) Amplitude need not be checked for a three hammer broken condition. For intermediate operating speed between 450 to 750 RPM the amplitude limits can be linearly interpolated. The amplitude limits mentioned above are in both vertical and horizontal directions. The amplitudes shall be calculated at critical points on the top surface of the R. C. C. deck. The amplitudes shall be checked for the most unfavorable superposition of modes in any direction. However, phase difference between the maximum amplitude occurring in different directions due to the rotating vetor may be considered while superimposing the modes.		
34.03.07	Unbalance force and Amplitude Criteria The unbalance forces and amplitude criteria shall be as per the equipment manufacturer's recommendations or as per VDI 2060/ VDI 2056, whichever is more stringent.		
34.03.08	Transient Resonance Transient resonance, which may occur during the start - up or coasting down condition of the crusher, shall be checked, and the amplitudes in such a condition should not exceed one - and - half times those at operating speed for each design condition.		
34.04.00	Strength Criteria The following criteria shall apply for the design of top deck : (a.) Dead loads, live loads, Seismic loads and dynamic loads shall be considered for the design. The most unfavorable combination shall considered for design. (b.) Seismic loads shall be assumed to act together with dynamic loads for a one millimeter eccentricity in the rotor. However, seismic loads and dynamic loads arising out of hammer breakage need not be considered together		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS PAGE 63 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS			
	(c.) Fatigue shall be considered while designing for dynamic forces. A fatigue factor of 2.0 shall be used on all dynamic forces to arrive at the equivalent static force for the purpose of design. (d.) Working stress method shall be used for the design of R. C. C. deck. In survival condition, 10 % overstressing may be permitted. (e.) The R. C. C. top deck shall be at least of M35 grade of concrete as per IS : 456. (f.) Fatigue need not be considered for the three hammer broken condition. (g.) For calculating unbalance forces, the heaviest hammer (plain or toothed) shall be considered.			
34.05.00	Approval of Designs and Drawings All design calculation, drawings and documents shall be in English. All design calculations and drawings shall be submitted to Employer for approval. However, approval of such designs and drawings shall not relieve the contractor of his responsibility regarding the adequacy of the foundation to carry the design forces.			
34.06.00	Standards Latest revisions of the following Codes shall be used for the design of the crusher foundations. (a.) IS : 456 Code of Practice for Plain and Reinforced concrete. (b.) IS : 2974 (Part IV) Code of Practice for Design and Construction of Machine Foundations (Part IV) for rotary type machine of low frequency. (c.) IS : 1893 (Criteria for Earthquake Resistant Design of Structures). (d.) DIN 4024 Machine Foundations : Flexible supporting structures for machines with rotating masses. (e.) DIN 2089 Helical Compression Springs out of round wire and rod; calculation and Design. (f.) DIN 2096 Helical Compression Springs out of round wire and rod; quality requirements for hot formed compression springs. (g.) VDI 2056 - Criteria for assessing mechanical vibrations of machines. (h.) VDI 2060 - Criteria for assessing the state of balance of rotating rigid bodies.not be permitted to exceed 38°C during placing and curing			
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 64 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
35.00.00	Packaging and Transportation. All the equipment shall be suitably protected coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at site till the time of erection. While packing all the materials the limitations from the point of view of availability of railway wagon sizes in India should be taken into account. The contractor shall be responsible for any loss or damage during transportation, handling and storage due to improper packing.		
36.00.00	Plant Life The plant shall be designed for a minimum operating life of 30 years under the conditions of operation. Assurance shall be given that plant components are adequate for this lifetime. If there are any exceptional items of the plant on which an assurance of meeting this clause cannot be given, life of such components and the difficulties associated with them shall be stated.		
37.00.00	PTFE (Poly Tetra Fluoroethylene) Bearing The bearing shall be of reputed make and manufacturer as approved by the Engineer, for required vertical load and end displacement/rotation. PTFE bearing shall be sliding against highly polished stainless steel and the coefficient of friction between them shall be less than 0.06 at 55 kg/sq.cm. In order to prevent cold flow in PTFE surface it shall be rigidly bonded by a special high temperature resistance adhesive to the stainless steel substrata. The stainless steel surface that slides against the PTFE is mirror polished. The stainless steel shall be bonded to the top plate by special high strength adhesive. The thickness of stainless steel plate shall be between 1.0 mm to 1.5 mm.		
38.00.00	TESTS FOR MATERIAL / WORKMANSHIP All tests required for all materials, quality of workmanship or any other tests as desired by the Engineer shall be at contractor's cost.		
39.00.00	MATERIALS		
39.01.00	For Civil, Structural and Architectural works Employer will not supply any material. All materials including cement, reinforcement steel and structural steel, whatsoever required for execution and completion of the entire scope of work covered under this specification shall be arranged by the contractor at his own cost. All materials procured by the contractor shall meet the quality requirements specified in this specification. The contractor shall keep sufficient stock of cement and steel at site at any point of time when the work is in progress excluding what has been already incorporated in the works, so that any disruption / delay in availability of these materials during procurement will not affect the progress of work at site. The minimum quantity of such materials in stock at site shall not be less then the Requirement of one (1) month in case of Cement and Requirement of two (2) Consecutive months in case of Steel.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS PAGE 65 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
39.02.00	Structural steel		
	Structural Steel (including embedded Steel) shall be straight, sound, free from twists, cracks, flaw, laminations and all other defects. Structural steel shall comprise of mild steel, medium strength steel and high tensile steel as specified below.		
39.02.01	Mild Steel		
	a) Rolled sections shall be of grade designation E250, Quality A/BR, Semi-killed/ killed conforming to IS 2062. All steel plates shall be of Grade designation E250, Quality BR (fully killed), conforming to IS 2062 and shall be tested for impact resistance at room temperature. Plates beyond 12mm thickness and up to 40mm thickness shall be normalized rolled. Plates beyond 40mm thickness shall be vacuum degassed & furnace normalised and shall also be 100% ultrasonically tested as per ASTM –A578 level B-S2. b) Pipes shall conform to IS 1161. c) Hollow (square and rectangular) steel sections shall be hot formed conforming to IS: 4923 and shall be of minimum Grade Yst 240. d) Chequered plate shall conform to IS 3502 and shall be minimum 6 mm thick excluding projection. Steel for chequered plate shall conform to grade E250A semi killed of IS: 2062 or equivalent grade conforming to ASTM & BS standards only.		
39.02.02	Medium and High Tensile Steel		
	Rolled Sections and plates shall be of grade designation E350 or higher, Quality B0 (Fully killed), conforming to IS 2062. Plates beyond 12mm thickness and up to 40mm thickness shall be normalized rolled. Plates beyond 40mm thickness shall be vacuum degassed & furnace normalised and shall also be 100% ultrasonically tested as per ASTM –A578 level B-S2.		
39.03.00	Fly ash based Portland pozzolona cement conforming to IS: 1489 Part - I shall preferably be used. However, the contractor may use other types of cements conforming to IS: 269, IS: 8112, IS: 12269, & IS: 455.		
39.04.00	Reinforcement steel shall conform to:		
	a) Mild steel bars of grade I of IS: 432 Part – I or grade A of IS: 2062. b) High yield strength deformed TMT steel bars of grade Fe-500 having minimum elongation of 14.5 % or Fe-500D, and conforming to other requirements of IS 1786.		
40.00.00	CODES AND STANDARDS		
	All standards, specifications, acts and code of practice referred to herein shall be the latest editions including all applicable official amendments and revisions. Other Indian, foreign Codes and Standards not listed here but referred to elsewhere within this specification shall also be deemed to be part of this list. In case of conflict between this specification and those (IS standards, codes etc.) referred to herein, the former shall prevail.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS
PAGE 66 OF 69			

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	Some of the relevant Indian standards, Acts and Codes applicable to this section of the specification are listed below		
	IS : 383	Specification for coarse and fine aggregates from natural sources for Concrete.	
	IS : 432	Specification for mild steel and medium tensile steel bars and hard drawn steel wire for concrete reinforcement.	
	IS : 456	Code of practice for plain and reinforced concrete.	
	IS : 458	Specification for concrete pipes.	
	IS : 516	Method of test for strength of concrete.	
	IS : 800	Code of practice for use of structural steel in general building construction.	
	IS : 814	Specification for covered electrodes for metal arc welding for weld steel.	
	IS : 816	Code of practice for use of metal arc welding for general construction.	
	IS : 817	Code of practice for training and testing of metal arc welders.	
	IS : 875 (Pt. I to V)	Code of practice for design loads other than earthquake) for buildings and structures.	
	IS : 1038	Steel doors, windows and ventilators.	
	IS : 1172	Basic requirements for water supply, drainage and sanitation.	
	IS : 1361	Steel windows for industrial buildings.	
	IS : 1786	Specification for high strength deformed steel bars and wires for concrete reinforcement.	
	IS : 1892	Code of practice for subsurface investigation for foundation.	
	IS : 1893	Criteria for earthquake resistant design of structures.	
	IS : 1904	Code of practice for design and construction of foundations in soils; general requirements.	
	IS : 1905	Code of practice for structural safety of buildings - Masonry walls.	
	IS : 1948	Specification for aluminium doors, windows and ventilators.	
	IS : 2062	Steel for general structural purposes.	
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE		TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS PAGE 67 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	IS : 2131 Method of standard penetration test for soils. IS : 2212 Code of practice for brickwork. IS : 2645 Specification for Integral cement water proofing compounds. IS:2720 (Part-II, IV TO VIII, XIV, XXI, XXIII, XXIV, XXVII TO XXIX, XL) Methods of test for soils - determination for water content etc code of practice for earth work on canals. IS : 2911 Code of practice for design and construction of pile foundations. (Part-1/Sec.1) Driven cast in situ concrete piles. (Part-1/Sec.2) Bored cast-in-situ concrete piles. (Part-IV) Load test on piles. IS : 2974 (Part - I TO V) Code of practice for design and construction of machine foundations. IS : 3370 (Part I to IV) Code of practice for concrete structures for the storage of liquids. IS : 3658 Code of practice for liquid penetrant flaw detection. IS : 3664 Code of practice for ultra sonic testing by pulse echo method. IS : 4326 Code of practice for earthquake resistant design and construction of buildings. IS : 4990 Specification for plywood for concrete shuttering work. IS : 5624 Specification for foundation bolts. IS : 7215 Tolerances for fabrication steel structures. IS : 8112 Specification for 43 grade Ordinary Portland Cement. IS : 9103 Specification for admixtures for concrete. IS : 9595 Code of procedure of manual metal arc welding of mild steel. IS : 10262 Recommended guidelines for concrete mix design. IS : 13311 Method of non - destructive testing of concrete. IS : 13755 Dust pressed ceramic tiles with water absorption of 3%, E6% (Group B11a)		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 68 OF 69

CLAUSE NO.	TECHNICAL REQUIREMENTS		
	ASTM 898 -89 Standard guide for use of high solid content, cold liquid-applied elastomeric water proofing membrane for use with separate wearing course. AS/NZS 2728 Pre finished / pre painted sheet metal product for interior / exterior building applications – Performance requirements. AS : 1365 Standards for steel manufacturing. AS : 1397 A steel sheet & strip – hot – dipped-zinc-coated or Aluminium-Zinc coated. AS : 3566 Self drilling screws for building and construction industry. IRC : 37 Guidelines for the design of flexible pavements. - Manual on sewerage and sewage treatment (Published by CPH & EEO) As updated. Indian Explosives Act. 1940 as updated. For “Foundation System and Geotechnical Data” refer “Project Information section” of Technical specification.		
LOT-1A PROJECTS FLUE GAS DESULPHURISATION (FGD) SYSTEM PACKAGE	TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOCUMENT NO.: CS-0011-109(1A)-2	SUB-SECTION-IV-D CIVIL WORKS	PAGE 69 OF 69

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
1.	PAR T-B	IV-D	3.07.00	8 OF 69	Gypsum Storage Shed The Gypsum storage shed shall be RCC framed structure with structural steel work shed with permanently colour coated profiled steel sheet roof and side cladding and RCC foundations etc. Roof shall be provided with troughed profile permanently colour coated sheet of 1 in 5 for quick drainage of rain water	Gypsum Storage Shed The Gypsum storage shed shall be RCC framed structure with RCC/ Brick infill wall (upto Tripper floor) and structural steel shed with permanently colour coated profiled steel sheet roof and side cladding (above tripper floor). Roof shall be provided with troughed profile permanently colour coated sheet with slope of 1 in 5 for quick drainage of rain water. At grade level Heavy duty paving as detailed elsewhere in the specification shall be provided inside the shed.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
2.	V/B	IV-D	3.14.01, Para 1	10 of 69	Single-flue or multi-flue chimney(s) shall be provided. Chimney shall be of reinforced concrete construction. There shall be one flue (liner) for each unit. The flue gas emission point shall be minimum 150 meters above the plant grade level.	Single-flue chimney(s) shall be provided. Chimney shall be of reinforced concrete construction. There shall be one flue (liner) for each unit. The flue gas emission point shall be minimum 150 meters above the plant grade level. The centre to centre distance between the proposed chimney(s) and the existing chimney(s) in any direction shall not be less than 150 metres.
3.	V/B	IV-D	3.14.08	14 of 69	Thermal insulation The insulation shall be semi rigid, resin bonded type, in the form of slabs and shall conform to IS: 8183. Blanket type insulation shall not be used. pins and speed washer.	Thermal insulation (Applicable in case of Titanium / C-276 Flue Liner) The insulation shall be semi rigid, resin bonded type, in the form of slabs and shall conform to IS: 8183. Blanket type insulation shall not be used. pins and speed washer.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
4.	VI/B	IV-D	3.14.09,	15 of 69	(iv) The inside surface of chimney shell above roof, horizontal surface of shell at top, underside of concrete roof slab, external surface of mini-shell above roof etc shall be painted with epoxy phenolic coating system having total 220 microns DFT.	(iv) The inside surface of chimney shell above roof, horizontal surface of shell at top, underside of concrete roof slab etc shall be painted with epoxy phenolic coating system having total 220 microns DFT.
5.	VI/A	II-A8	6.00.00, Annexur e-B	8 of 31	a) The basic wind speed “V _b ” at ten metres above the mean ground level	a) The basic wind speed “V _b ” at ten metres/second

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
6.	VII/A	II-A10	7.02.00	10 OF 30	For excavation 6 metres below FGL, sheet piling shall be provided.	Excavation may be carried out by using either sheet piling/ diaphragm wall/ secant piling/ contiguous piling or their combination.
7.	VII/A	II-A7/A8/A3/A5/A11	7.02.03 (xv)	14 OF 33/ 13 OF 31/ 14 OF 31/ 14 OF 40/ 15 OF 29	High Strain Dynamic Load Test may be carried out for routine load testing of working piles. However, at least two numbers of static routine vertical load tests shall be carried out on pile on which high strain dynamic load test has already been carried out for establishing the correlation between the two tests. In case of discrepancy if any between dynamic and static vertical load tests, then additional static routine vertical load tests shall be conducted as decided by the Engineer and the results of static routine vertical load shall prevail.	Either of Static routine load test or High Strain Dynamic Load Test may be carried out for routine load testing of working piles. However, at least two numbers of static routine vertical load tests shall be carried out on pile on which high strain dynamic load test has already been carried out for establishing the correlation between the two tests. In case of discrepancy if any between dynamic and static vertical load tests, then additional static routine vertical load tests shall be conducted as decided by the Engineer and the results of static routine vertical load shall prevail.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					load shall prevail. Number of routine vertical pile load tests as per clause 7.02.03 (ix) shall be total of static routine vertical load test and high strain dynamic load tests.	Number of routine vertical pile load tests as per clause 7.02.03 (ix) shall be total of static routine vertical load test and high strain dynamic load tests.
8.	VII/A	II-A10 Project Information Barh STPP Stage-I	7.00.00	10 to 13 of 30	SOIL DATA AND FOUNDATION SYSTEM	“ SOIL DATA AND FOUNDATION SYSTEM ” given in “ Annexure-1 ” to this amendment shall replace the contents of Clause 7.00.00, Page 10 to 13 of 30 , Sub-section-II-A10, Part-A Sec-VI, of Tech. Specification.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
9.	VII/A	II-A6 Project Information Solapur	7.00.00	9 to 21 of 31	Foundation system & Geotechnical data	“Foundation system & Geotechnical data” given in “Annexure-2” to this amendment shall replace the contents of Clause 7.00.00, Page 9 to 21 of 31 , Sub-section- II-A6, Part-A Sec- VI, of Tech. Specification.
10.	VII/A	II-A4 Project Information Darlipali	Annexur e-IV of clause 7.00.00	-	-	“Annexure-IV BORE LOGS” at “Annexure-3” to this amendment added with clause 7.00.00, II-A4, Part-A Sec-VI, of Tech. Specification.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
11.	VII/A	II-A9 Project Information Meja TPP-I	Annexur e-IV of clause 7.00.00		Annexure-IV Borelog	“Bore Log ” given in “Annexure-4” to this amendment shall replace the contents of Page 26 to 28 of 36 , Clause 7.00.00 , Sub-section-II-A9, Part-A Sec-VI, of Tech. Specification.
12..	VII/A	II- A1/A2//A4/ A5/ A6/A8/A11	-	-	-	Electrical Resistivity Test (ERT) Data at “Annexure-5”.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
13.	VII/A	IIA2 Project Information Lara STPP Stage-I	5.00.00	3 to 10 of 48	“CRITERIA FOR EARTHQUAKE RESISTANT DESIGN OF STRUCTURES AND EQUIPMENT”	“CRITERIA FOR EARTHQUAKE RESISTANT DESIGN OF STRUCTURES AND EQUIPMENT” given in “Annexure-6” to this amendment shall replace the contents of Clause 5.00.00, Sub-section- II-A2, Part-A Sec-VI, of Tech. Specification.
14.	VII/A	II-A10 Project Information Barh STPP Stage-I	5.00.00	2 to 7 of 30	“CRITERIA FOR EARTHQUAKE RESISTANT DESIGN OF STRUCTURES AND EQUIPMENT”	“CRITERIA FOR EARTHQUAKE RESISTANT DESIGN OF STRUCTURES AND EQUIPMENT” given in “Annexure-7” to this amendment shall replace the contents of Clause 5.00.00, Sub-section- II-A10, Part-A Sec-VI, of Tech. Specification.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Secti ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
15.	Secti on VI / Part A	Sub- Section III D	1.06.00	2 of 4	Uniform Finished Ground Level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.	Uniform Finished Ground Level (FGL) in FGD areas shall be made available by the owner at a level specified in tender drawing.
16.	Secti on VI / Part A	Sub-section IIID	2.00.00	2 of 4	Bidder shall provide permanent access to all facilities/structures from the nearby existing roads of the Owner. Roads shall be in concrete as per IRC standards, with minimum thickness of pavement (PQC) as 250mm (in M 35 grade) and DLC of 150 thick (in M 10 grade). Double lane road (width 12m having 7.5m wide pavement & 2.25m wide shoulders on both sides) shall be provided.	Bidder shall provide permanent access to all facilities/structures from the nearby existing roads of the Owner. Roads shall be in concrete as per IRC standards, with minimum thickness of pavement (PQC) as 250mm (in M 35 grade) and DLC of 150 thick (in M 10 grade). Double lane road (width 12m having 7.5m wide pavement & 2.25m wide shoulders on both sides) shall be provided.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
17.	Secti on VI / Part B	Sub-section IVD	15.00.00	32 of 69	 Sewage pump house shall be provided as per IS:4111.	 Sewage pumping stations shall be provided as per IS:4111.
18.	Secti on VI / Part B	Sub-section IVD	14.00.00	31 of 69	These values shall be based on rainfall intensity of 90mm/hr	Th ese values shall be based on rainfall intensity of 75mm/hr

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
19.	Secti on VI / Part A	Sub Section IIA10 Project information, BARH STPP STAGE-1 (3X660MW)	2.00.00	30 of 30		The topographical survey drawing no: 9562-999-POC-F-002 is attached with this amendment as Annexure-8
20.	Secti on VI / Part A	Sub Section IIA8 Project information, NABINAGA STPP STAGE-1 (3X660MW)	10.00.00	31 of 31		The topographical survey drawing no: 0370-999-POC-F-002 is attached with this amendment as Annexure-9

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
21.	Secti on VI / Part A	Sub Section IIA2 Project information, LARA STPP STAGE-1 (2X800MW)	-	48 of 48		The topographical survey drawing no: 9548-999-POC-F-002 is attached with this amendment as Annexure-10
22.	Secti on VI / Part B	Sub-Section-IV- D Civil Works	4.02.00	18 to 19 of 69	The scope for potable water supply includes all distribution conforming to IS: 458 and at rail crossing R.C.C. box culvert to be provided. For sewerage below ground stoneware pipes conforming to IS: 651 with concrete bedding and haunch.	The scope for potable water supply includes all distribution conforming to IS: 458 and at rail crossing R.C.C. box culvert to be provided.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
23.	Secti on VI / Part B	Sub-Section-IV- D Civil Works	7.00.00, Para-2	24 of 69	In case Bidder opts for steel super-structure with RCC floors/ roof, the bidder shall necessarily use permanently colour coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering. The detailed material property requirement of metal deck sheet is specified elsewhere in the specification. These profiled metal deck sheets shall be fixed to the structural steel beams/ purlins using headed shear anchor studs specified elsewhere in the specification.	In case Bidder opts for steel super-structure with RCC floors/ roof, the bidder shall necessarily use Troughed permanently colour coated metal decking sheets having minimum thickness of 0.6mm as permanent shuttering. The detailed material property requirement of metal deck sheet is specified elsewhere in the specification. These profiled metal deck sheets shall be fixed to the structural steel beams/ purlins using headed shear anchor studs specified elsewhere in the specification.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
24.	Secti on VI / Part B	Sub- Section-IV- D Civil Works	3.03.00, Para-1	6 of 69	The over ground portion of the transfer house shall be framed structure..... ...Brick wall cladding shall be supported on encased wall beams and suitably anchored to adjoining columns and beams. Vertical beams.Contractor shall have option to use tubular steel sections for roof truss only. Vertical bracings shall be provided only on four sides along the periphery. Grade slab with 0.9m height one brick thick wall plastered on both side at periphery shall be provided for all transfer houses.	The over ground portion of the transfer house shall be framed structure..... Brick wall cladding shall be supported on encased wall beams and suitably anchored to adjoining columns and beams. Vertical bracings shall be provided only on four sides along the periphery. Grade slab with 0.9m height one brick thick wall plastered on both side at periphery shall be provided for all transfer houses.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
25.	Secti on VI / Part B	Sub-Section-IV-D Civil Works	3.04.00, Para-1	7 of 69	The crusher house shall be framed structure..... Adequate steel doors and windows for natural lighting and ventilation shall be provided. Contractor shall have option to use tubular steel sections for roof truss only. Vertical bracings shall be provided only on four sides along the periphery.	The crusher house shall be framed structure..... Adequate steel doors and windows for natural lighting and ventilation shall be provided. Vertical bracings shall be provided only on four sides along the periphery.
26.	Secti on VI / Part B	Sub-Section-IV-D Civil Works	3.09.00, Para-1	8 of 69	All floors of transfer points/crusher houses and other facility buildings shall be accessible through staircase. For steel staircases, Stringers shall be of rolled steel channel (minimum SMC 250) and tread shall be of steel gratings. Out side stairs to transfer points/crusher house shall be open type. Minimum 50 x 50 x 6 mm size angles with lugs shall be provided as edge protection for treads of stairs in underground TP's.	All floors of transfer points/crusher houses and other facility buildings shall be accessible through staircase. For steel staircases, Stringers shall be of rolled steel channel (minimum SMC 250) and tread shall be of steel gratings. Out side stairs to transfer points/crusher house shall be open type. However sheeting shall be provided at the top. Minimum 50 x 50 x 6 mm size angles with lugs shall be provided as edge protection for treads of stairs in underground TP's.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
27.	Secti on VI / Part B	Sub- Section-IV- D Civil Works	3.01.00, Para-11	3 of 69	Plinth protection along with drains shall be provided along the Hopper complex. However, 5m wide paving shall also be provided around machinery hatches.	Plinth protection along with drains shall be provided along the Hopper complex. However, minimum 5m wide paving shall also be provided around machinery hatches and Truck hopper.
28.	Secti on VI / Part B	Sub- Section-IV- D Civil Works	24.00.00 ,	42 of 69	CONCRETE c) M35- For spring supported RCC deck	CONCRETE c) M35- For spring supported RCC deck and rail load bearing structure (if applicable).

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
29.	Secti on VI / Part B	Sub-Section-IV-D Civil Works	39.03.00 ,	66 of 69	Fly ash based Portland pozzolana cement conforming to IS: 1489 Part - I shall preferably be used. However, the contractor may use other types of cements conforming to IS: 269, IS: 8112, IS: 12269, & IS: 455.	Cement Fly ash based portland pozzolana cement conforming to IS:1489 (Part-1) shall be used for all areas other than for the critical structures identified below. Other properties shall be as per IS code. Ordinary Portland Cement (OPC) shall necessarily be used for the following structures. a) Spring supported decks of limestone crusher b) RCC for Chimney shell. The grade of cement shall be Grade 43 for OPC conforming to IS:8112. In place of fly ash based portland pozzolana cement, OPC mixed with Fly Ash can be used. Batching plant shall have facility for mixing fly ash. Fly ash shall conform to IS:3812(Part I & Part II). Percentage of fly ash to be mixed in concrete shall be based

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						on trial mix. Mix design shall be done with varying percentage of fly ash mix with cement.
30.	Secti on VI / Part B	Sub- Section-IV- D Civil Works	39.05.00 ,	66 of 69	-	Aggregates a) Coarse Aggregate Coarse aggregate for concrete shall be crushed stones chemically inert, hard, strong, durable against weathering of limited porosity and free from deleterious materials. It shall be properly graded. It shall meet the requirements of IS: 383. b) Fine Aggregate Fine aggregate shall be hard, durable, clean and free from adherent coatings of organic matter and clay balls or
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 18 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						pellets. Fine aggregate in concrete shall conform to IS : 383. For plaster, it shall conform to IS : 1542 and for masonry work to IS : 2116. c) Petrographic examination of aggregate shall be carried out by the contractor at National Council for Cement and Building Materials (NCB), Ballabgarh, or any other approved laboratory to ascertain the structure and rock type including presence of strained quartz and other reactive minerals. In case, the coarse aggregate sample is of composite nature, the proportions (by weight) of different rock types in the composite sample and petrographic evaluation of each rock should also be ascertained. While determining the rock type, special emphasis should be given on identification of known reactive rocks like

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						chaledony, opal etc. The procedure laid down in IS 2430 for sampling of aggregates may be followed. The laboratory shall determine potential reactivity of the aggregate, which may lead to reaction of silica in aggregate with the alkalis of cement and / or potential of some aggregates like limestone to cause residual expansion due to repeated temperature cycle. If the same is established, the contractor shall further carry out alkali aggregates reactivity test as per IS 2386 (Pt.VII) and / or repeated temperature cycle test to establish the suitability of the aggregates for the concrete work. The test results, with the final recommendations of the laboratory, as to a suitability of the aggregate, for use in the concrete work for various structures and suggested measures, in case of results

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						are not satisfactory, shall be submitted to the Engineer for his review, in a report form. In case in the report, it is established, that the aggregates contain reactive silica, which would react with alkalis of the cement, the contractor shall change the source of supply of the aggregate or use low alkali cement as per recommendation or take measures as recommended in the report as instructed by Engineer. In case aggregates indicate residual expansion, under repeated temperature cycle test (from 10° Celsius to 65° Celsius and for 60 temperature cycles) the material shall not be used for concreting of Lime stone crusher decks, Mills, Fans and other equipment foundations which are likely to be subjected to repeated
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 21 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						temperature cycle. The contractor shall use aggregates free from residual expansion under repeated temperatures cycle test.
31.	Section VI / Part B	Sub-Section-IV-D Civil Works	8.00.00, Para-3	26 of 69	Bricks to be used in brickwork shall be of minimum Class designation 50.	Only fly ash bricks shall be used in all construction. Bricks shall be table moulded/ machine made of uniform size, shape and sharp edges and shall have minimum compressive strength of 75kg/cm ² . Burnt clay fly ash bricks and fly ash lime bricks shall conform to IS 13757 and IS 12894 respectively. Minimum fly ash content in fly ash based bricks shall be 25%.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
32.	SECTION - VI, PART T-B	SUB-SECTION- III-C5 PLC BASED CONTROL SYSTEM	9.05.00	19 of 27	Bidder shall clearly bring out in the proposal the redundancy feature along with configuration diagram, single line diagram and datasheets etc. & this shall be finalized subject to approval during detail engineering.	Bidder shall clearly bring out in the proposal the configuration diagram, single line diagram and datasheets etc. & this shall be finalized subject to employer's approval during detail engineering.
	SECTION - VI, PART T-E	Tender drawing C&I		18 of 53 (of PDF)	Configuration B : UPS system shall consist of 1 x 100% charger and inverter, 1 x 100% Ni Cd Battery Bank for 1 hour, Bypass Line Transformers and Voltage Stabilizer, static switch, manual bypass switch, 2 x 100% ACDB, 1x100% Microprocessor controlled Battery Health Monitoring System (BHMS) and other necessary protective devices and accessories. Scheme of UPS system Configuration-B Drg. no. 0000-999-POI-A-019C	Configuration B : UPS system shall consist of 1 x 100% charger and inverter with input isolation transformer, 1 x 100% Ni Cd Battery Bank for 1 hour, Bypass Line Transformers and Voltage Stabilizer, static switch, manual bypass switch, 2 x 100% ACDB, 1x100% Microprocessor controlled Battery Health Monitoring System (BHMS) and other necessary protective devices and accessories. UPS Configuration-B drawing 0000-999-POI-A-019C updated.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
33.	SECTION – VI, PART-A	SUB-SECTION- IIIC C&I	New clause 1.00.00 e)	1 of 8		1.00.00 e) Scope defined in PART-A read in conjunction with PART-B has to be provided for each station (i.e. 11 sets for 11 stations) under LOT-1A package. The scope detailed hereunder in the following clauses is for one set.
34.	SECTION – VI, PART-T-E	Tender drawing C&I		13 of 53 (of PDF)	Standard configuration drawing for PLC based offsite control system. Tender drawing no. 0000-151-POI-A-013 (Rev no. A).	Standard configuration drawing for PLC based offsite control system. Tender drawing no. 0000-151-POI-A-013 (Rev no. B).
35.	SECTION – VI, PART-A	SUB-SECTION- IIIC C&I	New clause 2.07.00	4 of 8	-	2.07.00 Contractor shall provide one no. of Hand held HART calibrator per generating unit.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
36.	SECTION – VI, PAR T-A	SUB-SECTION- III C&I	New clause 6.08.00	7 of 8	-	6.08.00 Binary and modulating controls of complete Flue gas desulphurization system, associated material handling systems etc. and other systems being provided under the contract shall be implemented in PLC. The PLC based Control System shall have separate process blocks for unitised system and one process block for common system including material handling system. For example in KUDGL-I (3x800MW), the PLC based control system shall have following process blocks: (i) Unit-1 FGD and associated system (ii) Unit-2 FGD and associated system (iii) Unit-3 FGD and associated system (iv) Common system including material handling systems.
37.	SECTION – VI, PAR T-B	SUB-SECTION-III- C2, MEASURING INSTRUMEN TS	8.00.00	16 OF 34	Coriolis Flow Transmitter: Viscosity range of Fluid 0-500cst for HFO.	Coriolis Flow Transmitter: Viscosity range of Fluid 0-500cst for HFO.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
38.	SECTION – VI, PART-A	SUB-SECTION- III C&I	6.01.00	7 of 8	6.01.00 on as required basis (to be decided during detail Engineering) for controlling and monitoring of the FGD and associated system being provided under the contract located in FGD control room. One OWS shall also be provided with capabilities of programming station of PLC and Human Machine Interface system (EWS cum OWS). The PLC configuration drawing.....	6.01.00 on as required basis (to be decided during detail Engineering) for controlling and monitoring of the FGD and associated system being provided under the contract located in FGD control room. One OWS shall also be provided with capabilities of programming station of PLC and Human Machine Interface system (EWS cum OWS). However, bidder to consider minimum quantity of OWS and OWS cum EWS as follows: a) OWS (placed in FGD control room)-(N+1) where N is the total number of generating units per project under this package. b) OWS cum EWS (placed in FGD control room)-ONE (1) c) OWS (placed in central control room of each generating unit)-TWO (2). The PLC configuration drawing.....

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
39.	SECTION – VI, PAR T-A	SUB-SECTION- III C&I	New clause 6.09.00	7 of 8	-----	6.09.00 The Bidder shall provide maintenance services of complete control System under a comprehensive Annual Maintenance Contract (AMC) for period of three year after Warranty period.
	SECTION – VI, PAR T-B	SUB-SECTION- III-C5 PLC BASED CONTROL SYSTEM	16.01.00	26 of 27	16.01.00 The Bidder shall provide maintenance services of complete control System under a comprehensive Annual Maintenance Contract (AMC) for period of one year after Warranty period and thereafter AMC for only hardware support for next two years.	16.01.00 The Bidder shall provide maintenance services of complete control System under a comprehensive Annual Maintenance Contract (AMC) for period of three year after Warranty period.
40.	SECTION – VI, PAR T-E	Tender drawing C&I		19 and 20 of 53 (of PDF)	Instrumentation/control/power supply cabling diagram Drg No. 0000-101/102-POI-A-021 Sheet 1 of 3 and sheet 2 of 3	Instrumentation/control/power supply cabling diagram Drg No. 0000-101/102-POI-A-021 Sheet 1 of 3 and sheet 2 of 3 updated.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
41.	SECTION – VI, PART-A	SUB-SECTION- III C&I	7 of 8	New clause 6.10.00	-	6.10.00 Contractor shall provide control desk placed in FGD control room, meeting specification requirements stipulated in clause 10.04.00, PART-B, Sub Section III-C5 of technical specification. Contractor shall also provide a control desk for each generating unit, of length 2 meter aesthetically matching with the existing control desk of main plant Central Control Room (CCR) for placing FGD OWS in main plant CCR.
42.	SECTION – VI, PART-E	Tender drawing		5 of 53 (of PDF) 6 of 53 (of PDF)	Tender drawing no. 0011-109-POM-A-001(a): Scheme of FGD Absorber system (Single unit) Tender drawing no. 0011-109-POM-A-001: Scheme of FGD Absorber system (For two units)	NOTE 13 and 17 deleted NOTE 13 and 17 deleted

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
43.	SECTION – VI, PART-A	SUB-SECTION-IV Terminal points and exclusions	1.14.00	3 of 3	1.14.00 Control & Instrumentation a) Employer's marshalling cabinets for hardwired signal exchange with Employer system. b) Instrument air at one point (if required). c) One (1) no. 240V, single phase, 50 Hz feeder per unit for meeting the unregulated AC power supply requirement for illumination, heating, ventilation, and utility outlets, etc. at bidder's Power supply distribution panel. d) Two (2) 415 V, 3 – phase 3 wire, 50 Hz feeder for each set of the bidder's 24 V DC system.	1.14.00 Control & Instrumentation a) Employer's marshalling cabinets for hardwired signal exchange with Employer system. b) Employer's station wide LAN switch. c) One (1) no. 240V, single phase, 50 Hz feeder per unit for meeting the unregulated AC power supply requirement for illumination, heating, ventilation, and utility outlets, etc. at bidder's Employer's Power supply distribution panel.
44.	SECTION – VI, PART-T-B	SUB-SECTION-III-C2, MEASURING INSTRUMENTS	11.07.00 Note 1	30 OF 34	NOTES:- 01. Hot extractive sampling type/ Dilution extractive type systems shall be provided with dual sample probes along with all required accessories such	NOTES:- 01. Hot extractive sampling type/ Dilution extractive type systems shall be provided with dual sample probes along with all required accessories such as
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2						
					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 29 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					as redundant heavy duty pumps with continuous rated motors, moisture detection facility, pre-fabricated heated (for sampling type only) sample lines from probes to analyser panel, solenoid valves, filters, coolers along with level switch in gas coolers for auto draining purpose and flow meter for auto draining purpose and flow meter etc as applicable. Alternatively, permeation based dryer (located near the tapping point) may also be provided in place of sample cooler.	redundant heavy duty pumps with continuous rated motors, moisture detection facility, pre-fabricated heated (for sampling type only) sample lines from probes to analyser panel, solenoid valves, filters, coolers along with level switch in gas coolers for auto draining purpose and flow meter etc as applicable. Alternatively, permeation based dryer (located near the tapping point) may also be provided in place of sample cooler.
45.	SECTION - VI, PART A	SUB-SECTION- VII, Mandatory Spares	1.25.00	45 of 61	1.25.00 CONTROL AND INSTRUMENTATION	1.25.00 CONTROL AND INSTRUMENTATION (EXCLUDING AIR CONDITIONING AND VENTILATION SYSTEM, COMPRESSED AIR SYSTEM, FIRE DETECTION AND PROTECTION SYSTEM. For mandatory spare of these systems, refer mandatory spare clauses specified under respective systems)

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS						
46.	SECTION – VI, PAR T-A	SUB-SECTION- IIIC C&I	6.07.00	7 of 8	UPS of suitable capacity for the intended application meeting the requirements of Technical Specifications as per Cl. No. 9.05.00, Part B, III-C5. Contractor to note that UPS of configuration C is acceptable only upto 5 KVA. In case the consolidated load requirements.....	UPS of suitable capacity for the intended application meeting the requirements of Technical Specifications as per Cl. No. 9.05.00, Part B, III-C5. Contractor shall provide Mini UPS for 01 (one) no. of OWS cum EWS. Contractor to note that UPS of configuration C is acceptable only upto 5 KVA. In case the consolidated load requirements.....						
47.	SECTION – VI, PAR T-A	SUB-SECTION- IIIC C&I	New clause 6.11.00	7 of 8	-	Output redundancy is applicable for 10% of drives distributed in various functional groups (Exact application shall be finalized during detailed engineering).						
48.	SECTION – VI, PAR T-B	SUB-SECTION- III-C2 MEASURING INSTRUMENTS	2.01.00 (16)	3 of 34	<table><tr><td>16.</td><td>Adjustment/calibration/maintenance</td><td>From hand held HART calibrator/ centralized PC based system (as applicable).</td></tr></table>	16.	Adjustment/calibration/maintenance	From hand held HART calibrator/ centralized PC based system (as applicable).	<table><tr><td>16.</td><td>Adjustment/calibration/maintenance</td><td>From hand held HART calibrator/ centralized PC based system (as applicable).</td></tr></table>	16.	Adjustment/calibration/maintenance	From hand held HART calibrator/ centralized PC based system (as applicable).
16.	Adjustment/calibration/maintenance	From hand held HART calibrator/ centralized PC based system (as applicable).										
16.	Adjustment/calibration/maintenance	From hand held HART calibrator/ centralized PC based system (as applicable).										
49.	Part B (1)– Section VI	Sub Section-I-M1	6.02.03	21 of 51	Each silo shall be provided with sufficient no. of level transmitters.	Each Silo shall be provided with minimum 02 no. of Level transmitters per silo.						

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
50.	SECTION - VI, PART A	SUB SECTION VI	S.No xii , CL.NO. 5.00.00	21 of 24	DM COOLING (NORMALLY WORKING) WATER PUMP ONE (1) TO SUPPLY COOLING WATER ON THE PRIMARY (DM) SIDE OF THE PLATE TYPE HEAT EXCHANGER IN THE CLOSED LOOP EQUIPMENT COOLING WATER SYSTEM.	FGD DM (Primary) Cooling water pump (all working pumps) to supply cooling water on the primary (DM) side of the plate type heat exchanger in the closed loop equipment cooling water system.
51.	SECTION - VI, PART A	Sub section VI	S.No xiii CL.NO. 5.00.00,	21 of 24	AUXILIARY COOLING (NORMALLY WORKING) WATER PUMP ONE (1) TO SUPPLY COOLING WATER ON THE SECONDARY SIDE OF THE PLATE TYPE HEAT EXCHANGER IN THE CLOSED LOOP EQUIPMENT COOLING (UNIT AUXILIARY) WATER SYSTEM.	FGD Auxiliary (Secondary) Cooling water pumps (all working pumps) to supply cooling water on the secondary side of the plate type heat exchanger for FGD equipment cooling water system.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
52.	SECTION - VI, PART-A	Sub section IV	1.06.00	2 of 3	FOR GYPSUM WASHING, CONTRACTOR SHALL TAKE A TAP OFF SUITABLY FROM THE EXISTING HVAC HEADER (HVAC MAKE UP PUMP DISCHARGE) AVAILABLE ALONG C-ROW AT CD BAY RACK FOR MEETING THE WATER REQUIREMENT OF GYPSUM WASHING. THE PRESSURE AVAILABLE AT TP WILL BE 4 KSC (GAUGE) WRT FGL (APPROX.).	For Gypsum washing, contractor shall take a tap off suitably from the existing HVAC header (HVAC make up pump discharge) available along C-row at CD bay rack for meeting the water requirement of gypsum washing. The water quantity and pressure available at TP will be 20m3/hr & 4 Ksc (gauge) wrt FGL (approx.) respectively.
53.	VI Part-A	III-A5	1.02.01	1 of 6	Based on site visit, bidder shall submit layout for Limestone handling plant & Gypsum handling facilities along with their techno-commercial bid. Bidder shall bring out all necessary modification and relocation of existing facilities, if required, along with proposed Layout submitted with the bid. <i>In the absence of this, the bid shall be deemed incomplete and may be liable for rejection.</i>	Based on site visit, bidder shall submit layout for Limestone handling plant & Gypsum handling facilities along with their techno-commercial bid. All required modification and demolition work of existing facilities shall be in the bidder's scope. However if any relocation of existing facility is required, the same shall be done by the employer. Bidder shall bring out all necessary modification and relocation of existing facilities, if
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 33 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						required, along with proposed Layout submitted with the bid. <i>In the absence of this, the bid shall be deemed incomplete and may be liable for rejection.</i>
54.	Section VI, Part A	III-A5	2.01.01	2 of 6	Lime stone received through Road shall be unloaded by Two (2) numbers Truck Tipplers each of minimum 20T capacity to discharge Limestone on to Box Surface Feeders/ Truck Unloading Hopper, complete with all mechanical, electrical and C&I, civil & structural works for unloading Limestone by truck tipplers. TWO (2) NUMBERS BOX FEEDERS/ BULK-MATERIAL RECEIVING UNIT/ UNDERGROUND TRUCK UNLOADING HOPPER / SURFACE FEEDER, FOR UNLOADING OF LIMESTONE FROM TRUCKS/ SELF-TIPPLING TRUCKS/ LOADER SHOVELS, COMPLETE WITH	Lime stone received through Road shall be unloaded by Two (2) numbers Truck Tipplers each of minimum 40T capacity (Gross weight 60 T minimum) to discharge Limestone on to Box Feeders/ Surface Feeders/ Truck Unloading Hopper, complete with all mechanical, electrical and C&I, civil & structural works for unloading Limestone by truck tipplers. Two (2) numbers Box Feeders/ Bulk-material Receiving Unit/ ~~Underground Truck Unloading Hopper~~ / Surface feeder, for unloading of limestone from trucks/ self-tipping trucks/ loader shovels, complete with drives, accessories all mechanical, electrical and C&I, Civil & structural works, including its

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					DRIVES, ACCESSORIES ALL MECHANICAL, ELECTRICAL AND C&I, CIVIL & STRUCTURAL WORKS, INCLUDING ITS SUPPORTING FOUNDATIONS ETC. THIS UNIT SHALL FEED LIMESTONE ONTO THE CONVEYOR BEFORE LIMESTONE CRUSHER HOUSE.	supporting foundations etc. This unit shall feed limestone onto the conveyor before Limestone crusher house.
55.	--	--	--	--	Vibrating Feeder	Vibrating Screening Feeder
					Vibrating (Grizzly/Screening) Feeder	
					Vibrating Grizzly/Screening Feeder	
					Vibrating grizzly Feeders	
					Vibrating Screen Feeder	

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Secti on / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
56.	Secti on- VI, Part A	III-A5	2.01.07	3 of 6	Crushed limestone Reclaim Hopper (RH) /Silo..... For Limestone storage shed and for all buildings, other equipment such as Dry type Dust Extraction system, ventilation system, drinking water system, drainage system etc. as specified elsewhere in the specification.	Crushed limestone Reclaim Hopper (RH) /Silo..... For Limestone storage shed and for all buildings, other equipment such as Dry type Dust Extraction system, ventilation system, drinking water system, drainage system etc. as specified elsewhere in the specification.
	Secti on- VI, Part B	I-M6	4.11.3 (v)	15 of 73	The Contractor For specification of dust suppression equipment for paddle feeder, refer relevant Sub-section of this Specification.	The Contractor For specification of Dry type Dust Extraction System for paddle feeder, refer relevant Sub-section of this Specification.
	Secti on- VI, Part B	I-M6	4.13.7	19 of 73	Hoists with monorail of adequate capacity shall be provided in the service water/dust suppression/ potable water pump houses.	Hoists with monorail of adequate capacity shall be provided in the service water/ ~~dust suppression~~ / potable water pump houses.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
57.	Secti on- VI, Part A	III-A5	2.01.28	5 of 6	Minimum one (1) no. Weighing Bridge for Road trucks / Tipplers shall be provided each in Limestone unloading area and in Gypsum Loading area.	Minimum one (1) no. Weighing Bridge of capacity 100 MT for Road trucks / Tipplers shall be provided each in Limestone unloading area and in Gypsum Loading area.
58.	Secti on- VI, Part A	III-A5	2.01.19	4 of 6	One (1) number of passenger cum goods elevator with drives, all electrical, mechanical, civil, structural & associated foundation works, accessories and electrical to serve various floors of lime stone crusher house.	One (1) number conventional enclosure type passenger cum goods elevator having capacity of 16 persons (1088 kg) complying to IS:14665 (latest edition) with drives, all electrical, mechanical, civil, structural & associated foundation works, accessories and electrical to serve various floors of lime stone crusher house. Staircase access for machine room shall also be provided by the bidder.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
59.	Secti on- VI, Part A	III-A5	3.03.00	6 of 6	Minimum four (2) Nos. sump pumps in gypsum storage shed complete with motors, local control panel, level switches, individual discharge piping with fittings and valves to nearest plant drain including pipes etc. up to disposal point.	Minimum four (4) Nos. sump pumps in gypsum storage shed complete with motors, local control panel, level switches, individual discharge piping with fittings and valves upto Bottom Ash Slurry Sump.
60.	Secti on- VI, Part A	III-A5	2.01.11	3 of 6	One number of covered storage shed for crushed limestone. The storage shed shall be sufficient to store limestone equivalent to consumption of minimum 7 days at Design point (Generation of all units to be considered). A reclaim hopper shall be provided below the limestone storage shed for the entire length of the stockpile. Alternatively, suitable number of Limestone Storage Silos to store limestone equivalent to consumption of minimum 7 days. Suitable number of Belt feeders below silos shall be	One number of covered storage shed for crushed limestone. The storage shed shall be sufficient to store limestone equivalent to consumption of minimum 7 days at Design point (Generation of all units to be considered) or 5000 MT (wherever Railway Rake unloading is envisaged) whichever is higher. A reclaim hopper shall be provided below the limestone storage shed for the entire length of the stockpile. Alternatively, suitable number of Limestone Storage Silos to store limestone equivalent to consumption of minimum 7 days at Design point or 5000 MT

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					provided taking feed from silo and discharging onto onward conveyors/ Bucket elevators.	(wherever unloading is envisaged) whichever is higher. Suitable number of Belt feeders below silos shall be provided taking feed from silo and discharging onto onward conveyors/ Bucket elevators.
61.	Secti on- VI, Part A	VI	5.00.00	20 of 24	AUXILIARY POWER CONSUMPTION(PA) FOR EACH PROJECT The unit auxiliary power consumption xxix. Power consumption of Mechanical vapour Compressor divided by the number of units in the projects, in case ZLD system is provided The equipment's listed above for calculating..... power consumption.	AUXILIARY POWER CONSUMPTION(PA) FOR EACH PROJECT The unit auxiliary power consumption xxix. Power consumption of Mechanical vapour Compressor divided by the number of units in the projects, in case ZLD system is provided. xxx. a) Power consumption of lime stone unloading, conveying, crushing , storage & reclaiming system (Single stream) except Lighting, Hoists, sampling unit, Sump Pumps,
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 39 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					Note: 1. The bidder.....approva l. 2. The equipments..... consumption.	Elevators, DE, Ventilation, SW System, Potable water system – for road unloading system (if only road unloading system is provided) or b) Power consumption of lime stone conveying (starting from feed point from existing Coal Handling Plant), crushing, storage & reclaiming system (Single stream) except Lighting, Hoists, sampling unit, Sump Pumps, Elevators, DE, Ventilation, SW System, Potable water system – for Indian Railway’s unloading system. xxxi. Power consumption of Gypsum conveying system (Single Stream) except Lighting, Hoists, sampling unit, Sump Pumps, Elevators, DE, Ventilation, SW System, Potable water system. The equipment's listed above for calculating,.....po
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 40 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						wer consumption. Note: 1. The bidder.....approval. The equipments..... consumption.
62.	Secti on- VI, Part A	V	10.00.00	21 of 26	LIMESTONE HANDLING PLANT	LIMESTONE AND GYPSUM HANDLING PLANTS
63.	Secti on- VI, Part A		10.01.00	21 of 26	Rated capacity of Limestone handling system from existing CHP shall be 1200 TPH upto crushed limestone storage system. Belt speed of conveyors shall not be more than 3.4 m/s.	a. Rated capacity of Limestone handling system from existing CHP shall be 1200 MTPH upto crushed limestone storage system. Rated capacity of all other Limestone Handling Conveyors shall be 150 MTPH (min). b. Rated capacity of Limestone handling system for truck unloading and reclaim conveyors from storage shed/silo to limestone mill bunkers shall be 150 MTPH (min).
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 41 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						c. The rated capacity of all Gypsum handling conveyors shall be 150MTPH. Belt speed for 1200 MTPH conveyors shall not be more than 3.4 m/s, and belt speed for 150 MTPH conveyors shall not be more than 2.0 m/s
64.	Secti on- VI, Part A	V	10.02.00	21 of 26	All conveyors shall be designed for 110% of rated capacity. Rated capacity (corresponding to CHP capacity) shall be guaranteed capacity for 100% duty equipment. For 50% duty equipment design capacity shall be guaranteed capacity. For purpose of guaranteed power consumption rated capacity shall be considered in either case.	All conveyors shall be designed for 110% of rated capacity. Rated capacity (corresponding to LHP&GHP capacity) shall be guaranteed capacity for 100% duty equipment. For 50% duty equipment design capacity shall be guaranteed capacity. 1. For purpose of guaranteed power consumption rated capacity shall be considered in either case.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
65.	Secti on- VI, Part A	V	10.03.00	21 of 26	2x100 %(one working + one standby) conveying stream shall be provided in the CHP .	2x100 %(one working + one standby) conveying stream shall be provided in the LHP&GHP .
66.	Secti on- VI, Part A	V	10.06.00 e)	22 of 26	e) The following aspects shall be taken care of coal / limestone: i) The limestone delivered to power station shall be of size 250mm and below. However, occasionally 1-2% limestone of 400 mm lump size may also be encountered. ii) Due to open cast method of mining involved, the limestone may contain shale and sand stone as high as 20%. Also occasionally, metal pieces like broken shovel teeth, brake shoe, wires etc. may also come along with limestone. iv) The limestone as received' shall contain varying percentage of fines. This may form adhesive lumps particularly during monsoon when surface moisture is at its	e) The following aspects shall be taken care of limestone: i) The limestone delivered to power station shall be of size 250mm and below. However, occasionally 1-2% limestone of 400 mm lump size may also be encountered. ii) Due to open cast method of mining involved, the limestone may contain shale and sand stone as high as 20%. Also occasionally, metal pieces like broken shovel teeth, brake shoe, wires etc. may also come along with limestone. iv) The limestone as received' shall contain varying percentage of fines. This may form adhesive lumps particularly during monsoon when surface moisture is at its

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					percentage of fines. This may form adhesive lumps particularly during monsoon when surface moisture is at its maximum value. The sizing and selection of all equipment shall take care of above.	maximum value. The sizing and selection of all equipment shall take care of above.
67.	Secti on- VI, Part A	V	10.08.00	22 of 26	Drive equipment Rating Continuous Motor Rating (Name Plate Rating) at 50 Degree Centigrade Ambient temp. for Electric Motors a) For conveyors of belt conveyor systems *120% of actual power at drive motor output shaft at specified design capacity 	Drive equipment Rating Continuous Motor Rating (Name Plate Rating) at 50 Degree Centigrade Ambient temp. for Electric Motors a) For conveyors of belt conveyor systems *110% of actual power at drive motor output shaft at specified design capacity

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
68.	Secti on- VI, Part A	V	10.11.00	23,24 of 26	Belting and Pulleys for 1200 TPH Belting and Pulleys for 150TPH rated conveying capacity (LHP &GHP) (a)..... (b)..... (c)..... (d) Maximum type of pulleys permitted based on pulley diameter and shaft diameter shall be limited to three (3) nos. These shall comprise of two (2) nos. drive pulleys & one (1) no. for all balance pulleys excluding tripper & SS pulleys.	Belting and Pulleys for 1200 TPH Belting and Pulleys for 150TPH rated conveying capacity (LHP &GHP) (a)..... (b)..... (c).....

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Secti on / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
69.	Secti on- VI, Part A	V	10.13.00	24 of 26	2x100 %(one working + one standby) conveying stream shall be provided in the limestone and gypsum handling system.	Maximum type of pulleys permitted based on pulley diameter and shaft diameter shall be limited to five (5) nos. These shall comprise of two (2) nos. drive pulleys & three (3) no. for all balance pulleys excluding tripper & SS pulleys.
70.	Secti on- VI, Part A	V	10.14.00	24 of 26	The covered storage shed/silo for limestone shall be sufficient to store limestone equivalent to consumption of minimum 7 days. The covered storage.....7 days. Further approval..... of the pulley diameters. Maximum type of pulleys permitted based on pulley diameter and shaft diameter shall be limited to five (5). These shall comprise of two (2) nos. drive pulleys and three (3) nos. for all balance pulleys. Pulleys for Belt	The covered storage shed/silo for limestone shall be sufficient to store limestone equivalent to consumption of minimum 7 days at Design point (Generation of all units to be considered) or 5000 MT (wherever Railway Rake unloading is envisaged) whichever is higher. The covered storage.....7 days. At least One third (1/3 rd) of total stipulated crushed limestone storage shall be considered in the hopper, if applicable, and hopper length shall be equal to stockpile
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 46 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					Feeder, fixed & travelling tripper, SS pulleys & S/R pulleys are not included in the above categories.	length placed along the tripper centerline. Further approval..... of the pulley diameters.
71.	Secti on- VI, Part A	V	10.15.00	25 of 26	Dust extraction system Type: Venturi scrubber type Location: Belt feeder after crusher & Vibrating Screening Feeder at crusher house.	Dust extraction system Type: Venturi scrubber type Location: Truck un-loading points, Junction Towers (limestone/ gypsum discharge & receipt points), limestone crusher house (including belt feeder & vibrating screening feeder) and lime stone/gypsum storage Shed/Silo.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
72.	Secti on- VI, Part A	V	10.18.00	25 of 26	Chutes: Minimum clear cross section of chute: 1000 mm X 800 mm (inside both ways) Chutes: Minimum clear cross section of chute: 1000 mm X 800 mm (inside both ways) for 1200 mm Belt Width. Minimum clear cross section of chute: 900 mm X 600 mm (inside both ways) for 800 mm Belt Width.	Chutes: Minimum clear cross section of chute: 1000 mm X 800 mm (inside both ways) for 1200 mm Belt Width. Minimum clear cross section of chute: 900 mm X 600 mm (inside both ways) for 800 mm Belt Width.
73.	Secti on- VI, Part A	V	11.00.00 11.01.00 11.02.00 11.03.00 11.04.00 11.05.00	25 of 26 & 26 of 26	LIMESTONE HANDLING PLANT AND GYPSUM HANDLING PLANT 	Deleted
74.	Secti on- VI, Part B	I-M6	1.0.0	1 of 73	INTRODUCTION This section of the specification provides the detailed technical requirements for the Limestone Handling System.	INTRODUCTION This section of the specification provides the detailed technical requirements for the Limestone & Gypsum Handling System.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
75.	Section-VI, Part B	I-M6	Footer	All Pages	SUB-SECTION-I-M6 LIMESTONE HANDLING PLANT(LHP)	SUB-SECTION-I-M6 LIMESTONE AND GYPSUM HANDLING PLANT(LHP & GHP)
76.	Section-VI, Part B	I-M6	3.3.0	3 of 73	In limestone crusher house, limestone from each incoming Conveyor shall pass through two (2) numbers of (dedicated) Vibrating grizzly/ screening Feeders and two (2) numbers of (dedicated) crushers respectively which shall crush limestone to (-) 20mm size or to suit limestone pulverizer and system..... in limestone crusher house.	In limestone crusher house, limestone from each incoming Conveyor shall pass through one (1) or two (2) numbers, as applicable, of (dedicated) Vibrating grizzly/ screening Feeders and one (1) or two (2) numbers, as applicable, of (dedicated) crushers respectively which shall crush limestone to (-) 20mm size or to suit limestone pulverizer and system..... in limestone crusher house.
77.	Section-VI, Part B	I-M6	4.0.0	3 of 73	MAJOR EQUIPMENT OF LIMESTONE HANDLING SYSTEM AND GYPSUM HANDLING SYSTEM Specifications for Coal Handling system equipments shall be generally followed for Lime Handling System & Gypsum handling System	MAJOR EQUIPMENT OF LIMESTONE HANDLING SYSTEM AND GYPSUM HANDLING SYSTEM
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 49 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					unless specified otherwise.	
78.	Secti on- VI, Part B	I-M6	4.1.1	4 of 73	Belting: The belting shall be of either synthetic fabric such as Nylon- Nylon etc. with rubber covers of adequate flexibility to give a troughing angle of 35 deg. For all the conveyors the number of plies, cover thickness, factor of safety etc. shall be as per the recommendation of belt manufacturer, but not inferior to the figures as tabulated in data sheet. <i>Longitudinal joints in the plies of synthetic fabric belts is not permitted.</i>	Belting: The belting shall be of either synthetic fabric such as Nylon- Nylon etc. with rubber covers of adequate flexibility to give a troughing angle of 35 deg. Belt Width : 800 mm (Min) for 150 MTPH 1200 mm (Min) for 1200 MTPH For all the conveyors the number of plies, cover thickness, factor of safety etc. shall be as per the recommendation of belt manufacturer, but not inferior to the figures as tabulated in data
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 50 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
79.	Secti on- VI, Part B	I-M6	4.5.3	9 of 73	 Alternatively, Air cooled type scoop coupling is also acceptable for all conveyors with HT motors for (AHP, LHP, GHP) and crusher scoop couplings. Suitable interlock.....	sheet. Longitudinal joints in the plies of synthetic fabric belts is not permitted. Alternatively, Air cooled type scoop coupling is also acceptable for all conveyors with HT motors for (AHP, LHP, GHP) and crusher scoop couplings. Suitable interlock.....
80.	Secti on- VI, Part B	I-M6	4.6.4	10 of 73	New Clause	All vertical steel members (in Junction Towers/Transfer Points and Crusher House) supporting the conveyors, equipment shall be mounted on 150MM concrete pedestals above floor level to avoid their direct contact with water.
81.	Secti on- VI, Part C	GTR	30.00.00	42 of 83	NOISE LEVEL The equivalent 'A' weighed sound pressure level measured at a height of 1.5 m above floor level in elevation and at a distance of one (1) metre horizontally from the nearest surface of any equipment/machine, furnished and	NOISE LEVEL The equivalent 'A' weighed sound pressure level measured at a height of 1.5 m above floor level in elevation and at a distance of one (1) metre horizontally from the nearest surface of any equipment/machine, furnished and
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 51 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

[illegible]

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						switchgear panels for this purpose (conversion from Transformer feeder to Motor feeder, change in CT rating Etc.) required for making the panel suitable for above use shall also be in the scope of bidder. Other FGD loads (except indicated above) shall be fed by creating new 11kV FGD tie switchgear and subsequent additional voltage levels as required. The feeders currently being used for feeding ESP standby transformer (ESP Trf #G/H) shall be used for extending power supply from station board to 11kV FGD Tie switchgear. If the rating of the VCB in this panel in station switchgear is less than 1600A, VCB shall be replaced by new 1600A VCB for this purpose. Other necessary augmentation in panel for conversion from transformer feeder to TIE feeder, change in CT rating etc. required for making the panel suitable for the above use shall also be in scope of bidder. Entire cabling
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2						AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)
						Page 53 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						and re-cabling required as per the above scheme shall be in bidder's scope. Bidder will be required to feed the ESP standby transforms from this new FGD Tie switchgear. In case of Nabinagar 4x250MW project feeding shall be as indicated in Single line diagrams tender SLD 0011-109-POE-J-001 C. In this case ID booster fans along with all other FGD loads shall be fed from 6.6kV FGD Tie switchgear (one set for two units each). The feeders currently being used for feeding ESP standby transformer (ESP Trf #C) shall be used for extending power supply from station board to 6.6kV FGD Tie switchgear.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
83.	SECTION – VI, PART E	III A-1	1.00.00	5 of 8	Electrical Single line diagram for FGD Package Drg. no. 0011-109-POE-J-001/A-E	Electrical Single line diagram for FGD Package Drg. no. 0011-109-POE-J-001/A/B/C Revised Drg. is attached at Part-E.
84.	SECTION – VI, PART A	SUB-SECTION-III-B ELECTRIC AL SYSTEM/ EQUIPMEN T	1.02.00	1 of 6	HT/ LT SWITCH GEAR HT and 415V Switchgear / Motor control centers (as shown in Electrical Single Line Diagram Drg No. 0011-109-POE-J-001) Busduct / Cable (as applicable), distribution boards, AC/DC fuse boards, LDB, local emergency push button stations for all drives energized from MCC's under contractor scope and local motor starters (for ventilation fans) as required for plant and equipment in contractor's scope.	HT/ LT SWITCH GEAR HT and 415V Switchgear / Motor control centers (as shown in Electrical Single Line Diagram Drg No. 0011-109-POE-J-001) Busduct / Cable (as applicable), distribution boards, AC/DC fuse boards, LDB, local emergency push button stations for all drives and local motor starters (for ventilation fans) as required for plant and equipment in contractor's scope. HT Switchgear- All HT switchboards shall be provided with one spare motor feeder and one transformer feeder on each

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						section as spares. LT Switchgear- All LT Switchgears, Motor Control Centers (MCCs) & AC/DC distribution boards, etc. shall have at least twenty per cent (20%) or minimum two (whichever is higher) fully equipped switch fuse modules of each rating as spares, uniformly distributed over different vertical sections. In addition, all LT Switchgears, MCCs and AC distribution boards shall have as spares at least twenty per cent (20%) of starter modules/MCCB modules or at least one module (whichever is higher) of each rating range of the selection tables (Clause no.43.00.00) of Tech. Specification Part-B, Sub-Section E-10, equipped for the rating of the largest auxiliary fed from that range.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
85.	SECTION - VI, PART-A	SUB-SECTION-III-B ELECTRIC AL SYSTEM/ EQUIPMEN T	1.02.00	1 of 6	DC SYSTEM Battery and Battery Charger Lead acid plante type/ Nickel Cadmium batteries and Float cum boost chargers for plant and equipment in the scope of the contractor, as per system requirement. The DC system (Battery and Charger) shall be supplied to cater to various DC loads in the plant. The design and sizing criteria shall be as detailed out in the chapter B-0 Part-B of Technical specifications	DC SYSTEM Battery and Battery Charger Lead acid plante type/ Nickel Cadmium batteries and Float cum boost chargers for plant and equipment in the scope of the contractor, as per system requirement. The DC system (Battery and Charger) shall be supplied to cater to various DC loads in the plant. The design and sizing criteria shall be as detailed out in the Sub-section-II- E1 Part-B of Technical specifications
86.	SECTION - VI, PART-B	SUB-SECTION-II-E1 GENERAL ELECTRIC ALSPECIFIC CATION	2.01.01	3 of 7	Adequate number of auxiliary transformers shall be provided to meet the demand on 11kV, 3.3KV and 415V systems under most onerous conditions, with the criteria that each 11kV / 3.3KV / 415 V switchgear / MCC / DB shall be fed by 2x100% or 3 X 50 %, 3x100% transformers / feeders, and these shall be rated to carry the maximum	Adequate number of auxiliary transformers shall be provided to meet the demand on 11kV, 3.3KV and 415V systems under most onerous conditions, with the criteria that each 11kV / 3.3KV / 415 V switchgear / MCC / DB shall be fed by 2x100% or 3 X 50 %, these shall be rated to carry the maximum load expected to
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 57 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					load expected to be imposed.	be imposed.
87.	SECTION – VI, PART-B	SUB-SECTION-II-E1 GENERAL ELECTRIC ALSPECIFICATION	2.02.00	3 of 7	MV Switchgears Sizing of HT Switchgears (11kV/3.3kV) shall be in accordance with Clause No. 1.00.00 of Sub-section E9 and its sub-clauses covering sizing criteria, performance / reliability criteria, layout spare capacity requirements, standardization, etc.	MV Switchgears Sizing of HT Switchgears (11kV/3.3kV) shall be in accordance with Clause No. 1.00.00 of Sub-section E9 and its sub-clauses covering sizing criteria, performance / reliability criteria, layout spare capacity requirements, standardization, etc.
88.	SECTION – VI, PART-B	SUB-SECTION-II-E1 GENERAL ELECTRIC ALSPECIFICATION	2.03.00	3 of 7	LV Switchgears Sizing of LT Switchgears shall be in accordance with Clause No. 1.00.00 of Sub-section-II-E10 and its sub-clauses covering design considerations, performance / reliability criteria, spare capacity requirements, standardization, etc.	LV Switchgears Sizing of LT Switchgears shall be in accordance with Clause No. 1.00.00 of Sub-section-II-E10 and its sub-clauses covering design considerations, performance / reliability criteria etc.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
89.	SECTION – VI, PART-B	SUB-SECTION-II-E1 GENERAL ELECTRIC ALSPECIFICATION	2.03.00	4 of 7	LV Switchgears For 415V system, busduct assemblies shall be used for incoming connection from transformers to the switchboard and interconnecting sections between switchboards wherever transformer rating is 1000KVA or above. However, for transformers of 1000KVA rating, cable connection may also be acceptable in case of layout constraints.	LV Switchgears For 415V system, busduct assemblies shall be used for incoming connection from transformers to the switchboard and interconnecting sections between switchboards wherever transformer rating is 1000KVA or above. However, for transformers of 1000KVA rating, cable connection may also be acceptable in case of layout constraints.
90.	SECTION – VI, PART-B	SUB-SECTION-II-E1 GENERAL ELECTRIC ALSPECIFICATION	2.04.00	4 of 7	Integration with Employer's Switchgear SCADA All MV & LV circuit breakers shall be provided with Communicable Numerical Relays complying with IEC-61850 as specified in Sub-section II-E-09. These relays shall be integrated with Employer's Switchgear SCADA through Ethernet switches (to be supplied by Employer) mounted on each	THIS CLAUSE DELETED.
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2						AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)
						Page 59 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					switchgear. The circuit breaker will normally be controlled from remote control panels (DDCMIS) through closing and shunt trip coils. The control of the breakers shall also be possible from the Employer's Switchgear SCADA system.	
91.	SECTION – VI, PART-B	SUB-SECTION-II-E1 GENERAL ELECTRIC AL SPECIFICATION	2.05.00	4 of 7	Control Philosophy The Control Philosophy shall be as follows: (a) All the 11 KV/ 3.3 KV & LT Incoming, Ties , Bus couplers, Transformer feeders shall be controlled from Switchgear SCADA and also from DDCMIS. (b)The motor feeders shall be controlled from the DDCMIS only	Control Philosophy The Control Philosophy shall be as follows: a) All switchgears and MCCs shall be controlled from PLC/DCS.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
92.	SECTION - VI, PAR T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	1.00.00	1 of 39	 Sizing For fault Conditions Fault Level shall be the basic selection Criteria for MV switchgears. Typical Fault ratings are as detailed under Technical parameters (B-0).	 Sizing For fault Conditions Fault Level shall be the basic selection Criteria for MV switchgears. Typical Fault ratings are as detailed under Technical parameters (sub-section-II-E1).
93.	SECTION - VI, PAR T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	1.00.00	2 of 39	Spare capacity and Future Requirements all MV Switchboards is provided with one spare motor feeder and one transformer feeder on each section for future requirements.	 Deleted

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS																																																																						
94.	SECTION - VI, PART-B	SUB-SECTION-II-E9 HT SWITCHGEAR	3.00.00	3 of 39	Technical Parameters	Technical Parameters <table> <tr> <th colspan="7">a) SYSTEM PARAMETERS</th></tr> <tr> <td>1</td><td>Nominal System voltage</td><td>11 kV</td><td>6.6 kV</td><td>3.3 kV</td><td></td><td></td></tr> <tr> <td>2</td><td>Highest System voltage</td><td>12 kV</td><td>7.2 kV</td><td>3.6 kV</td><td></td><td></td></tr> <tr> <td>3</td><td>Rated Frequency</td><td>50 Hz</td><td>50 Hz</td><td>50 Hz</td><td></td><td></td></tr> <tr> <td>4</td><td>Number of phases/ poles</td><td>Three</td><td>Three</td><td>Three</td><td></td><td></td></tr> <tr> <td>5</td><td>System neutral earthing</td><td colspan="2">Earthed through Resistance to limit fault current to</td><td>600A</td><td>600A</td><td>600 A</td></tr> <tr> <td>6</td><td>One minute power frequency withstand voltage</td><td colspan="2"></td><td colspan="3"></td></tr> <tr> <td></td><td>- for Type tests</td><td>28</td><td>20</td><td>10</td><td></td><td></td></tr> <tr> <td></td><td>- for Routine tests</td><td>28</td><td>20</td><td>10</td><td></td><td></td></tr> <tr> <td>7</td><td>1.2/50 microsecond Impulse withstand voltage</td><td>75 kV (peak)</td><td>60 kV(peak)</td><td>40 kV(peak)</td><td></td><td></td></tr> </table>	a) SYSTEM PARAMETERS							1	Nominal System voltage	11 kV	6.6 kV	3.3 kV			2	Highest System voltage	12 kV	7.2 kV	3.6 kV			3	Rated Frequency	50 Hz	50 Hz	50 Hz			4	Number of phases/ poles	Three	Three	Three			5	System neutral earthing	Earthed through Resistance to limit fault current to		600A	600A	600 A	6	One minute power frequency withstand voltage							- for Type tests	28	20	10				- for Routine tests	28	20	10			7	1.2/50 microsecond Impulse withstand voltage	75 kV (peak)	60 kV(peak)	40 kV(peak)		
a) SYSTEM PARAMETERS																																																																												
1	Nominal System voltage	11 kV	6.6 kV	3.3 kV																																																																								
2	Highest System voltage	12 kV	7.2 kV	3.6 kV																																																																								
3	Rated Frequency	50 Hz	50 Hz	50 Hz																																																																								
4	Number of phases/ poles	Three	Three	Three																																																																								
5	System neutral earthing	Earthed through Resistance to limit fault current to		600A	600A	600 A																																																																						
6	One minute power frequency withstand voltage																																																																											
	- for Type tests	28	20	10																																																																								
	- for Routine tests	28	20	10																																																																								
7	1.2/50 microsecond Impulse withstand voltage	75 kV (peak)	60 kV(peak)	40 kV(peak)																																																																								

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.		Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS				
							8	Maximum system fault level including initial motor contribution	40 kA (rms)	40 kA (rms)	40 kA (rms)
							9	Short time rating for bus bars, ckt. breakers, current transformers and swgr. Assembly.	40 kA (rms) for one (1) sec.	40 kA (rms) for one (1) sec.	40 kA (rms) for one (1) sec.
							10	Dynamic withstand rating	100 kA (peak)	100 kA (peak)	100 kA (peak)
							11	IAC Rating	40 KA, 1 sec		
							11	Control supply voltage			
								- Trip and closing coils	240V DC	240V DC	240 V DC
								- Spring charging motor	240V DC	240V DC	240 V DC
								- Space heaters	240 V AC single phase with neutral solidly earthed		

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS																																																																														
						<table><tr><td>1</td><td>Maximum ambient air temperature</td><td>50 deg. C</td><td>50 deg. C</td><td>50 deg. C</td><td></td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>b)</td><td colspan="5">BUS BARS</td></tr><tr><td>1</td><td>Continuous current rating at 50°C ambient:</td><td colspan="4">As Per System requirements and preferably the current ratings shall be 2700 amp, 2500 Amp, 2000Amp, 1600 Amp and 1000 Amp.</td></tr><tr><td>2</td><td>Temperature Rise allowed above ambient</td><td colspan="4">40° C for plain joints 55° C for Silver plated joints.</td></tr><tr><td>c)</td><td colspan="5">SWGR. CUBICLE CONSTRUCTIONAL REQUIREMENTS</td></tr><tr><td>1</td><td>Color finish</td><td colspan="4">RAL9002 (Main body)</td></tr><tr><td></td><td>Exterior</td><td colspan="4">RAL 5012 (Extreme end covers)</td></tr><tr><td>2</td><td>Cable entry</td><td colspan="4"></td></tr><tr><td></td><td>a)</td><td>Power Cables</td><td colspan="3">Bottom</td></tr><tr><td></td><td>b)</td><td>Control Cables</td><td colspan="3">Bottom</td></tr><tr><td>3</td><td>Bus duct entry</td><td colspan="4">Top</td></tr><tr><td>4</td><td>Earthing conductor</td><td colspan="4">Galvanized steel strip</td></tr></table>	1	Maximum ambient air temperature	50 deg. C	50 deg. C	50 deg. C		2						b)	BUS BARS					1	Continuous current rating at 50°C ambient:	As Per System requirements and preferably the current ratings shall be 2700 amp, 2500 Amp, 2000Amp, 1600 Amp and 1000 Amp.				2	Temperature Rise allowed above ambient	40° C for plain joints 55° C for Silver plated joints.				c)	SWGR. CUBICLE CONSTRUCTIONAL REQUIREMENTS					1	Color finish	RAL9002 (Main body)					Exterior	RAL 5012 (Extreme end covers)				2	Cable entry						a)	Power Cables	Bottom				b)	Control Cables	Bottom			3	Bus duct entry	Top				4	Earthing conductor	Galvanized steel strip			
1	Maximum ambient air temperature	50 deg. C	50 deg. C	50 deg. C																																																																																
2																																																																																				
b)	BUS BARS																																																																																			
1	Continuous current rating at 50°C ambient:	As Per System requirements and preferably the current ratings shall be 2700 amp, 2500 Amp, 2000Amp, 1600 Amp and 1000 Amp.																																																																																		
2	Temperature Rise allowed above ambient	40° C for plain joints 55° C for Silver plated joints.																																																																																		
c)	SWGR. CUBICLE CONSTRUCTIONAL REQUIREMENTS																																																																																			
1	Color finish	RAL9002 (Main body)																																																																																		
	Exterior	RAL 5012 (Extreme end covers)																																																																																		
2	Cable entry																																																																																			
	a)	Power Cables	Bottom																																																																																	
	b)	Control Cables	Bottom																																																																																	
3	Bus duct entry	Top																																																																																		
4	Earthing conductor	Galvanized steel strip																																																																																		

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS																																																						
						<table><tr><td>5</td><td>Service Continuity of swgrs(as per IS/IEC 62271-200)</td><td>LSC2B-PM</td></tr><tr><td colspan="3">d) CIRCUIT BREAKERS</td></tr><tr><td>1</td><td colspan="2">The circuit breakers current rating shall be selected from the load current given in SLD which is at an ambient of 50° C.</td></tr><tr><td>2</td><td>Short circuit breaker Current</td><td>11 kV</td><td>6.6 kV</td><td>3.3 kV</td></tr><tr><td></td><td>a) A.C. compo nent</td><td>40kA</td><td>40 kA</td><td>40K A</td></tr><tr><td></td><td>b) D.C. compo nent</td><td colspan="3">As per IS: 13118 or IEC-62271</td></tr><tr><td>3</td><td>Short Circuit making current</td><td>100 kA (peak)</td><td>100 kA (peak)</td><td>100 kA (peak)</td></tr><tr><td>4</td><td>Operating Duty</td><td colspan="3">B-3 Min-MB-3 Min-MB</td></tr><tr><td>5</td><td>Total break time</td><td colspan="3">Not more than 4 cycles</td></tr><tr><td>6</td><td>Total make time</td><td colspan="3">Not more than 5 cycles</td></tr><tr><td>7</td><td>Operating Mechanis m</td><td colspan="3">Motor wound spring charged stored energy type as per IEC-62271</td></tr><tr><td>e)</td><td colspan="4">CURRENT TRANSFORMER</td></tr></table>	5	Service Continuity of swgrs(as per IS/IEC 62271-200)	LSC2B-PM	d) CIRCUIT BREAKERS			1	The circuit breakers current rating shall be selected from the load current given in SLD which is at an ambient of 50° C.		2	Short circuit breaker Current	11 kV	6.6 kV	3.3 kV		a) A.C. compo nent	40kA	40 kA	40K A		b) D.C. compo nent	As per IS: 13118 or IEC-62271			3	Short Circuit making current	100 kA (peak)	100 kA (peak)	100 kA (peak)	4	Operating Duty	B-3 Min-MB-3 Min-MB			5	Total break time	Not more than 4 cycles			6	Total make time	Not more than 5 cycles			7	Operating Mechanis m	Motor wound spring charged stored energy type as per IEC-62271			e)	CURRENT TRANSFORMER			
5	Service Continuity of swgrs(as per IS/IEC 62271-200)	LSC2B-PM																																																										
d) CIRCUIT BREAKERS																																																												
1	The circuit breakers current rating shall be selected from the load current given in SLD which is at an ambient of 50° C.																																																											
2	Short circuit breaker Current	11 kV	6.6 kV	3.3 kV																																																								
	a) A.C. compo nent	40kA	40 kA	40K A																																																								
	b) D.C. compo nent	As per IS: 13118 or IEC-62271																																																										
3	Short Circuit making current	100 kA (peak)	100 kA (peak)	100 kA (peak)																																																								
4	Operating Duty	B-3 Min-MB-3 Min-MB																																																										
5	Total break time	Not more than 4 cycles																																																										
6	Total make time	Not more than 5 cycles																																																										
7	Operating Mechanis m	Motor wound spring charged stored energy type as per IEC-62271																																																										
e)	CURRENT TRANSFORMER																																																											

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS															
						<table><tr><td>1.</td><td>Class of Insulation</td><td>Class E or better</td></tr><tr><td>2.</td><td>Rated output of each</td><td>Adequate for the relays and devices connected, but not less than five (5) VA.</td></tr><tr><td>3.</td><td>Accuracy class</td><td></td></tr><tr><td></td><td>Protection & Measurement</td><td>Class PS for differential & REF and core balance CTs; 5P20 for other protection CTs. Required Accuracy for metering is 0.2s for feeders as marked in SLD</td></tr><tr><td>4.</td><td>Minimum primary earth fault current to be detected by core balance current Transformer</td><td>3 Amperes</td></tr></table>	1.	Class of Insulation	Class E or better	2.	Rated output of each	Adequate for the relays and devices connected, but not less than five (5) VA.	3.	Accuracy class			Protection & Measurement	Class PS for differential & REF and core balance CTs; 5P20 for other protection CTs. Required Accuracy for metering is 0.2s for feeders as marked in SLD	4.	Minimum primary earth fault current to be detected by core balance current Transformer	3 Amperes
1.	Class of Insulation	Class E or better																			
2.	Rated output of each	Adequate for the relays and devices connected, but not less than five (5) VA.																			
3.	Accuracy class																				
	Protection & Measurement	Class PS for differential & REF and core balance CTs; 5P20 for other protection CTs. Required Accuracy for metering is 0.2s for feeders as marked in SLD																			
4.	Minimum primary earth fault current to be detected by core balance current Transformer	3 Amperes																			
						<table><tr><td colspan="3">f) VOLTAGE TRANSFORMERS</td></tr><tr><td>1.</td><td>Rated Voltage Factor</td><td>1.2 continuous for all VTs, and 1.9 for 8 hours for star connected VTs.</td></tr><tr><td>2.</td><td>Class of insulation</td><td>Class E or better</td></tr></table>	f) VOLTAGE TRANSFORMERS			1.	Rated Voltage Factor	1.2 continuous for all VTs, and 1.9 for 8 hours for star connected VTs.	2.	Class of insulation	Class E or better						
f) VOLTAGE TRANSFORMERS																					
1.	Rated Voltage Factor	1.2 continuous for all VTs, and 1.9 for 8 hours for star connected VTs.																			
2.	Class of insulation	Class E or better																			

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						3 . Other parameters BUS PT-0.5 Class, VA req. adequate for application. Line PT-0.5 Class for sync./3P for door interlocks, VA req. adequate for application. 0.2 class PT for defined feeders as per SLD for metering application, VA req. adequate for application.
						g) H.V. FUSES 1 . Voltage class 6.6KV 3.3 KV 2 . Rupturing Capacity Adequate for 100 kA (peak) Adequate for 100 kA (peak) 3 . Rated current As per application
						h) SURGE ARRESTERS (FOR MOTOR FEEDERS) 11 kV 6.6 KV 3.3 KV 1 . Nominal discharge Current (8x20 μs) 5kA 5kA 2 . Max. system voltage (rms) 12 kV 7.2 KV 3.6 KV

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS				
						3	Rated Voltage of Surge arrestor	12 KV (phase to phase)	7.5 KV (phase to phase)	4.5 KV (phase to phase)
						4	Max allowable Residual voltage at nominal discharge current	40 kV	25 kV	15 kV
						5	Mounting	Inside panel	Inside panel	Inside panel
						i)	CONTACTORS :			
						1.	Nominal System Voltage	6.6 kV		3.3 KV
						2.	Highest System Voltage	7.2 kV		3.6 KV
						3.	Rated Frequency	50 HZ		50 Hz
						4.	Rated Continuous Current at 50°C ambient	Current rating shall be selected appropriate for the load current.		
						5.	Control Supply Voltage	240V DC unearthed		

**LOT 1A PROJECTS
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2**

**AMENDMENT NO.
CS-0011-109(1A)-2-AMDT-03(T)**

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS			
						<table><tr><td>6.</td><td>Utilisation category</td><td>AC-3</td></tr></table>	6.	Utilisation category	AC-3
6.	Utilisation category	AC-3							
95.	SECTION – VI, PAR T-B	SUB-SECTION-II-E9 HT SWITCHGE EAR	3.00.00	6 of 39	h) SURGE ARRESTERS (FOR MOTOR FEEDERS) 3. Rated Voltage of Surge arrester 12 KV for 11 KV And 4.5 KV for 3.3 KV	h) SURGE ARRESTERS (FOR MOTOR FEEDERS) 3. Rated Voltage of Surge arrester 12 KV(Phase to Phase) for 11 KV And 4.5 KV (Phase to Phase) for 3.3 KV			

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
96.	SECTION - VI, PAR T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	4.5.1	11 of 39	The circuit breaker / contactor will normally be controlled from remote control panels (DDCMIS) as well as from Switchgear SCADA System (via Numerical Relays) through closing and shunt trip coils.	The circuit breaker / contactor will normally be controlled from remote control panels (PLC/DCS) (via Numerical Relays) through closing and shunt trip coils.
97.	SECTION - VI, PAR T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	4.5.1	15 of 39	(a) All switchboards shall be provided with separate LV panels at both the extreme ends which shall house the control & space heater supply distribution system, Ethernet switches (provided by employer) and other LV equipment common for the board. (e) Power Supply to Numerical Relay and Ethernet switch shall be an independent circuit with switch and fuse tapped from the panel DC supply.....	(a)Bus PT Panel shall house the control & space heater supply distribution system and other LV equipment common for the board. e) Power Supply to Numerical Relay shall be an independent circuit with switch and fuse tapped from the panel DC supply.....
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 70 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
98.	SECTION – VI, PART-B	SUB-SECTION-II-E9 HT SWITCHG EAR	5.1.4	19 of 39	(d) Board IED (Switchgear Control Unit)-32BI + 32 BO	DELETED

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
99.	SECTION - VI, PART-B	SUB-SECTION-II-E9 HT SWITCHGEAR	5.1.7	19 of 39	All the numerical relays shall have communications on three ports, local front port communication to laptop and dual ports on IEC 61850 to communicate with the employer's data concentrator through LAN. The dual IEC 61850 ports shall be connected to two separate Ethernet switches (provided by employer) to form part of the Switchgear SCADA.	All the numerical relays shall have communications on two ports, local front port for communication to laptop and one RJ45 port on IEC 61850.
100.	SECTION - VI, PART-B	SUB-SECTION-II-E9 HT SWITCHGEAR	5.3.1	22 of 39	Control of breakers / vacuum contactors shall be carried out from the HMI station of Switchgear SCADA system through the LAN and the numerical relays as well as from DDCMIS through hardwired control commands in the form of 24V DC signal. Preferably, binary input of all relays shall be configurable to accept 24V DC signals directly from DDCMIS and no separate coupling relays shall be provided.	Control of breakers / vacuum contactors shall be carried out from PLC/DCS through hardwired control commands in the form of 24V DC signal. Preferably, binary input of all relays shall be configurable to accept 24V DC signals directly from DDCMIS and no separate coupling relays shall be provided.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					provided.	
101.	SECTION – VI, PART T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	5.3.8	23 of 39	The alarm / status of each individual protection function and trip operation shall be communicated to the Switchgear SCADA system.	DELETED

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
102.	SECTION - VI, PAR T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	5.4.00 5.4.1	23 of 39	NETWORKING Adequate space in the LV panel shall be identified for mounting of at least 2 Nos of employer's Ethernet Switches (19" rack mounting) in all switchgears. Further, mounting of Ethernet switch in the above compartment and inter-panel wiring of Ethernet cable for connection of all numerical relays on the switchgear to the Ethernet switches shall be in the contractor's scope. Arrangement to provide required control supply to Ethernet switch shall be made in the switchgear.	DELETED

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
103.	SECTION - VI, PAR T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	6.1.00	25 of 39	 For all important components like Surge Arrestors and Numerical relays, Ethernet switches, Data concentrators & Fibre Optic cables, the contractor shall submit the reports of all the type tests as per applicable standards and carried out not earlier than ten years prior to the date of bid opening.	... For all important components like Surge Arrestors and Numerical relays, the contractor shall submit the reports of all the type tests as per applicable standards and carried out not earlier than ten years prior to the date of bid opening.
104.	SECTION - VI, PAR T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	7.0.00	27 of 39	Training workshop at site for Switchgear Workshop Training at site shall aim for familiarization of Site Engineers for commissioning and day to day O & M of MV Switchgears. The scope shall include Two No's of MV Switchgear workshops and Training for a batch of 20 Engineers and a separate batch of 20 supervisors/technicians for two(2) days in each workshop	Training workshop at site for Switchgear Workshop Training at site shall aim for familiarization of Site Engineers for commissioning and day to day O & M of MV Switchgears. The scope shall include one number of MV Switchgear workshop and Training for a batch of 20 Engineers and a separate batch of 20 supervisors/technicians for two (2) days at Project site. One day

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
					at Project site. One day shall be for class-room training & One day shall be for hands-on training on MV Switchgears. One such Workshop shall be organized before the commissioning of First MV Switchboard and the Second workshop shall be conducted before Unit Commissioning. Employer shall provide the required Infrastructure such as Training Conference room, Projection systems etc.	shall be for class-room training & One day shall be for hands-on training on MV Switchgears. The workshop shall be organized before the commissioning of First MV Switchboard. Employer shall provide the required Infrastructure such as Training Conference room, Projection systems etc.
105.	SECTION - VI, PART T-B	SUB-SECTION-II-E9 HT SWITCHG EAR	8.0.00	28 of 39	Training workshop at site for Numerical Relay Workshop Training at site shall aim for familiarization of Site Engineers for commissioning and day to day O & M of Numerical Relays and trouble shooting. The scope shall include Two No's of Numerical Relay workshops and Training for a batch of 20 Engineers at Project Site for 2 days in each of workshop at project site.	Training workshop at site for Numerical Relay Workshop Training at site shall aim for familiarization of Site Engineers for commissioning and day to day O & M of Numerical Relays and trouble shooting. The scope shall include one number of Numerical Relay workshops and Training for a batch of 20 Engineers at Project Site for 2 days at project site. One day shall be for class-room
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 76 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
106.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	1.01.01	1 of 58	One day shall be for class-room training & One day shall be for hands-on training on Numerical Relays. One such Workshop shall be organized before the commissioning of First MV Switchboard and the Second workshop shall be conducted before Unit Commissioning. Employer shall provide the required Infrastructure such as Training Conference room, Projection systems	training & One day shall be for hands-on training on Numerical Relays. The workshop shall be organized before the commissioning of First MV Switchboard. Employer shall provide the required Infrastructure such as Training Conference room, Projection systems etc.
					Lighting load of 50 kVA (Minimum) shall be considered on each section of main switchgears with incomer from transformer as indicated in the tender SLD.	Lighting load of 50 kVA (Minimum) shall be considered on each section of main switchgears with incomer from transformer.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
107.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	1.03.00	2 of 58	Spare capacity and Future Requirements All LV Switchboard shall be provided with spare feeders / modules as specified in relevant clause of Part-A of Technical Specification.	DELETED
108.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	1.04.00	2 of 58	It shall be preferred to have all LV Switchboards for the entire plant from a single manufacturer maintainability and spares management point of view.	DELETED
109.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	1.05.00	2 of 58	(f) Separate control cables shall be laid for EPB (Emergency/Local Push Button) status from EPB to Switchgear for the Switchgear and DCS.	(f) Separate control cables shall be laid for EPB (Emergency/Local Push Button) status from EPB to Switchgear for the Switchgear and PLC/DCS.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
110.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	4.25.00	12 of 58	Adequate space in a separate compartment shall be identified for mounting of Ethernet Switch (19" rack mounting), in all switchgears having numerical relays. Further, mounting of Ethernet switch in the above compartment at site and provision of inter-panel wiring (Cat5e Ethernet / Fibre Optic) for connection of numerical relays to Ethernet switch shall be in the contractor's scope. Arrangement to provide required control supply (110 V / 220 V DC) to Ethernet switch shall be made in the switchgear.	DELETED
111.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	11.00.00	18 of 58	TELESCOPIC TROLLEY The quantity of telescopic trolleys to be supplied shall be 2 Nos. per switchgear room.	TELESCOPIC TROLLEY The quantity of telescopic trolleys to be supplied shall be 1 No. per switchgear room.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
112.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	18.00.00	20 of 58	Numerical relays & networking	Numerical relays
113.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	18.01.00	20 of 58	 These relays shall be connected to the Switchgear SCADA System, through Ethernet switches.....	 DELETED
114.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	18.02.00	21 of 58	Control of circuit breakers shall be carried out from DDCMIS through hardwired control commands in the form of 24V DC signal. Preferably, binary input of all relays shall be configurable to accept 24V DC signals directly from DDCMIS and no separate coupling relays shall be provided.....	Control of circuit breakers shall be carried out from PLC/DCS through hardwired control commands in the form of 24V DC signal. Preferably, binary input of all relays shall be configurable to accept 24V DC signals directly from PLC/DCS and no separate coupling relays shall be provided.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
115.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHGEARS & LT BUSDUCTS	18.03.00	21 of 58	Each numerical relay shall be connected to the Ethernet switch(in Employer's scope) provided in the Switchgear through Cat5e Ethernet /FO cable. Ethernet Switches shall be connected through Fibre Optic cable to form a ring network.	DELETED
116.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHGEARS & LT BUSDUCTS	18.04.00	21 of 58	The numerical relay shall be capable of measuring and storing values of a wide range of quantities, events, faults and disturbance recordings. The alarm / status of each of protection function and trip operation shall be communicated to Switchgear SCADA / DDCMIS. The numerical relays shall have built in feature / hardware interface to provide such inputs to Switchgear SCADA / DDCMIS for analog / digital values.	The numerical relay shall be capable of measuring and storing values of a wide range of quantities, events, faults and disturbance.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
117.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHGEARS & LT BUSDUCTS	18.05.00	21 of 58	The required .ICD / .CID files of the Numerical relays under the scope of this package for the integration with the SCADA shall be provided by the Numerical relay vendor along with necessary engineering support.	DELETED
118.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHGEARS & LT BUSDUCTS	18.11.00	22 of 58	All the numerical relays shall have communications on three ports, local front port for communication with laptop and dual ports on IEC 61850 to communicate with the Switchgear SCADA System.	All the numerical relays shall have communications on two ports, local front port for communication with laptop and one RJ45 port on IEC 61850.
119.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHGEARS & LT BUSDUCTS	18.26.00	23 of 58	Numerical relays shall have feature for Time synchronization through the Switchgear SCADA System. The resolution of time synchronization shall be +/- 1.0 millisecond or better throughout the entire system.	Numerical relays shall have feature for Time synchronization. The resolution of time synchronization shall be +/- 1.0 millisecond or better throughout the entire system.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
120.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	18.27.00	23 of 58	Relays & Ethernet switches shall be suitable to accept both AC & DC supplies with range 110V or 220V with tolerance of 70 % to 120 % of rated voltage & shall be finalized during detailed engineering.	Relays shall be suitable to accept both AC & DC supplies with range 110V or 220V with tolerance of 70 % to 120 % of rated voltage & shall be finalized during detailed engineering.
121.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	18.27.00	23 of 58	Bus no volt condition shall be configured to an output of contact of the relay of incomers for suitably interfacing with DDCMIS wherever required.	Bus no volt condition shall be configured to an output contact of the relay of incomers for suitably interfacing with PLC/DCS wherever required.
122.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	19.08.00	24 of 58	The alarm/status of each individual protection function and trip operation shall be communicated to Switchgear SCADA / DDCMIS.	DELETED

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
123.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	19.12.00	24 of 58	Required No. of extra binary inputs shall be provided in the numerical relay for digital inputs from critical outgoing MCCB feeders on that switchgear section	DELETED
124.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	19.13.00	24 of 58	Circuit-breaker status, protection status, etc. required for control logics shall be hardwired to DDCMIS.....	Circuit-breaker status, protection status, etc. required for control logics shall be hardwired to PLC/DCS.....

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
125.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHGEARS & LT BUSDUCTS	19.14.01	24 of 58	The contractor shall arrange for training on design, engineering, Commissioning and operation & maintenance of LV Switchgear, Numerical relays and Switchgear networking system for a duration of one (1) months.	Training workshop at site for Switchgear Workshop Training at site shall aim for familiarization of Site Engineers for commissioning and day to day O & M of LT Switchgears. The scope shall include one number of LT Switchgear workshop and Training for a batch of 20 Engineers and a separate batch of 20 supervisors/technicians for two (2) days at Project site. One day shall be for class-room training & One day shall be for hands-on training on LT Switchgears. The workshop shall be organized before the commissioning of First LT Switchboard. Employer shall provide the required Infrastructure such as Training Conference room, Projection systems etc.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
126.	SECTION - VI, PART-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	19.14.02	24 of 58	The scope shall include training for a batch of engineers and a separate batch of Supervisors/Technicians at Project Site. One such Workshop shall be organized before the commissioning of First LV Switchboard and the second workshop shall be conducted before final system Commissioning. Owner shall provide the required Infrastructure such as Training Conference room, Projection systems etc.	Training workshop at site for Numerical Relay Workshop Training at site shall aim for familiarization of Site Engineers for commissioning and day to day O & M of Numerical Relays and trouble shooting. The scope shall include one number of Numerical Relay workshops and Training for a batch of 20 Engineers at Project Site for 2 days at project site. One day shall be for class-room training & One day shall be for hands-on training on Numerical Relays. The workshop shall be organized before the commissioning of First LT Switchboard. Employer shall provide the required Infrastructure such as Training Conference room, Projection systems etc

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
127.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	31.00.00 31.01.00 31.02.00 31.03.00 31.04.00 31.05.00 31.06.00 31.07.00 31.08.00 31.09.00 31.10.00 31.11.00	31 & 32 of 58	BUS TRUNKING SYSTEM TYPE (SANDWICH BUSDUCT)	DELETED
128.	SECTION - VI, PAR T-B	SUB-SECTION-II-E10 LT SWITCHG EARS & LT BUSDUCT S	38.04.00	34 of 58	Type test reports for the following tests on the model of the Numerical relays, Ethernet switches shall be submitted for Employer's review.	Type test reports for the following tests on the model of the Numerical relays shall be submitted for Employer's review.
129.	SECTION - VI, PAR T-B	SUB-SECTION-II-E11 DIESEL GENERAT	5.03.00	3 OF 20	Owner shall provide two (2) number..... The alternator outgoing supply of DG set shall be fed	Bidder shall provide two (2) number..... The alternator outgoing supply of DG set shall be fed into bidder's

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
		ORS			into employers breaker panel.	breaker panel.
130.	SECTION - VI, PAR T-B	SUB-SECTION-II-E11 DIESEL GENERAT ORS	6.01.00	4 of 20	All DG..... It shall also have auto initiation through command from owner's panel.....included in the offer	All DG.... It shall also have auto initiation through command from remote from bidder's panel.....included in the offer
131.	SECTION - VI, PAR T-B	SUB-SECTION-II-E11 DIESEL GENERAT ORS	7.10.03	7 OF 20	(I) Earth fault (alarm) input from owners switchgear	(i) Earth fault (alarm) input from bidder's switchgear
132.	SECTION - VI, PAR T-B	SUB-SECTION-II-E11 DIESEL GENERAT ORS	7.11.00	8 of 20	Suitable 4-20mA transducers with dual output shall be provided in the control panel for voltmeter & frequency meter for owners use at remote	Suitable 4-20mA transducers with dual output shall be provided in the control panel for voltmeter & frequency meter for bidder's use at remote
133.	SECTION - VI, PAR T-B	SUB-SECTION-II-E11 DIESEL GENERAT ORS	7.12.00	8 of 20	The bidder is required to provide coupling relays (with diodes) having 24V DC energising coil in the control panel for the followings	The bidder is required to provide coupling relays (with diodes) having 24V DC energising coil in the control panel for the followings for bidder's use

**LOT 1A PROJECTS
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2**

**AMENDMENT NO.
CS-0011-109(1A)-2-AMDT-03(T)**

Page 88 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
		ORS			owner's use	
134.	SECTION - VI, PAR T-B	SUB-SECTION- II-E11 DIESEL GENERAT ORS	7.14.00	8 of 20	Provision for following status/ signal for Employers information shall be provided in the DG control panel for both main & standby DG Sets:	Provision for following status/ signal for Bidder's information shall be provided in the DG control panel for both main & standby DG Sets:
135.	SECTION - VI, PAR T-B	SUB-SECTION- II-E11 DIESEL GENERAT ORS	3.00.00	2 of 20	Technical Requirements:- Fuel service tank:-8 hours running	Technical Requirements:- Fuel service tank:- 990 litres
136.	SECTION - VI, PAR T-B	SUB-SECTION- II-E11 DIESEL GENERAT ORS	7.04.00	5 of 20	A tinned copper/ aluminium bar of adequate dimension shall be provided for earth connection complete with nuts and bolts as required for external connection to Employers earth grid	A tinned copper/ aluminium bar of adequate dimension shall be provided for earth connection complete with nuts and bolts as required for external connection to Bidder's earth grid

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
137.	SECTION – VI, PART-B	SUB-SECTION-II-E15 STATION LIGHTING	4.00.00	5 of 19	5) While finalizing the detailed layout of lighting fixtures, the position/location and layout of equipments should be taken into account to have adequate illumination at desired locations	5) Different Lighting Systems envisaged for various plant areas are indicated in Annexure-E2: While finalizing the detailed layout of lighting fixtures, the position/location and layout of equipments should be taken into account to have adequate illumination at desired locations
138.	SECTION – VI, PART-B	SUB-SECTION-II-E15 STATION LIGHTING		18 of 19 of 19	NA	Annexure –E2 attached
139.	SECTION – VI, PART-A	SUB-SECTION-III-B-ELECTRIC AL SYSTEM/EQUIPMENT	1.08.00	2 OF 6	2) Contractor scope shall include...in the FGD area as shown in Drg no :- 0011-999-POC-F-001... and suitability....	2) Contractor scope shall include...in the FGD area as shown in GLP drawing of respective plant.... and suitability....

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
140.	SECTION - VI, PART-B	SUB-SECTION-II-E6 CABLING, EARTHING & LIGHTNING PROTECTION	9.00.00	23 OF 23	e) NA	e) The cable entry and exit from switchgear room shall be from 1.5 mtr (minimum) above FGL
141.	SECTION - VI, PART-B	SUB-SECTION-II-E12 Outdoor Transformer	7.00.00		NEW CLAUSE ADDITION	Specification for Dry type (indoor transformers) Attached as Annexure-E3

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
142.	Part-B, Section-VI	Sub-Section-I-M7	3.01.00	3-4 of 32	A. General System Description The wastewater stream.....in the tender. <u>Brine Concentrator</u> The design of brine concentrator.....produce solids. <u>Vacuum/Low temperature operation system</u> Vacuum/Low temperature operation, where no seed slurry is added and wastewater boil in low temperature due to vacuum condition, is also acceptable provided such system meets the provenness criteria specified in tender. <u>Crystallizer System</u> Waste water.....Vapour compressor	A. General System Description The wastewater stream.....in the tender. <u>Brine Concentrator</u> The design of brine concentrator.....produce solids. <u>Vacuum/Low temperature operation system</u> Vacuum/Low temperature operation, where no seed slurry is added and wastewater boil in low temperature due to vacuum condition, is also acceptable provided such system meets the provenness criteria specified in tender. In case, the Bidder provides such a system, all other associated system etc. shall be provided in line with the reference project which meets the provenness criteria proposed by the vendor. Further, the contractor shall provide all necessary support documents like P&IDs, Process
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 92 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. No.	Sect ion / Part	SUB SECTION	Clause No.	Page No.	EXISTING	READ AS
						calculation, Equipment Layouts, etc. of the Reference Project during detail engineering & same equipment/system shall be provided for these projects also as a minimum. Further, Contractor shall also comply with all other requirements like Design criteria, Redundancy of equipment, MOC, Guarantee etc. as specified in this Technical specification. <u>Crystallizer System</u> Waste water.....Vapour compressor
143.	Part-A, Section-VI	Sub-Section-III-A6	1.02.00	1 of 3	Evaporative concentration system The softened wastewater..... vacuum pumps(if applicable), Seeding system, Chemical feeding system, ...provided as per system requirement.	Evaporative concentration system The softened wastewater..... vacuum pumps(if applicable), Seeding system, Vacuum/Low temperature operation system , Chemical feeding system, ...provided as per system requirement.
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 93 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
144.	VII/A	III-A1	2 of 9	2.04.00	Clean gas from the absorber shall be taken to the Wet Chimney, to be provided by the Contractor, through three stage mist eliminators. The contractor shall terminate the flue gas duct (at a suitable point on the common flue gas duct to chimney-upstream of the chimney terminal point and outside the chimney). Provision shall be made for facilitating operation of unit with FGD bypass through existing stack. All modifications required including providing bypass damper & Gate is included in the scope of the Contractor.
145.	VII/A	III-A1	1 of 9	1.03.00	The FGD system Lot 1A Project. The contractor shall also supply an auxiliary absorbent tank, common for all the units, for storage of absorber slurry of one unit. The contractor's scope.....system.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
146.	V/A	III-A1	2 of 9	2.06.00	The gypsum from the absorber(s).....provided. Washed and dewatered gypsum from the dewatering system shall be fed to a belt conveyor (in Employers scope). The contractor shall discharge the gypsum cake above the Gypsum handling belt conveyor to be provided by the Contractor .
147.	V/A	III-A1	5 of 9	7.00.00	PROCESS WATER & COOLING WATER STORAGE & PUMPING SCHEME
148.	V/A	III-A1	6 of 9	7.01.01	2x100% Process Water Pumps for each unit connected to each of the Process water Storage tanks (for example total 4 nos. of pumps for 2x800 MW) along with all necessary piping, valves, control & instrumentation. Each pump catering to process water requirement of one unit.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
149.	V//A	III-A1	6 of 9	7.02.00	2x100% Mist Eliminator Wash Water Pump for each unit connected to each of the Process water Storage tanks (for example total 4 nos. of pumps for 2x800 MW) along with all necessary piping, valves, control & instrumentation. Each pump Technology Collaborator.
150.	V//A	III-A1	5 of 9	6.01.00	The Contractor shall provide a common auxiliary absorbent tank, common for all the units, of sufficient capacity for storage of absorber slurry of one unit.
151.	V//B	I-M1	7 of 51	3.03.09	The dampers shall be pneumatically operated and controlled from the controlroom. Provision shall be made for giving signal automatic bypass controls of the absorber in case of failure of the absorber spray system. The dampers therimofthehand wheel.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
152.	V//B	I-M1	20 of 51	5.06.23	It should be possible to discharge the absorber sump into the emergency drain tank within 2 hours. Auxiliary Absorbent tank within 2 hours.
153.	V//B	I-M1	29 of 51	7.08.01	The Contractor shall provide an auxiliary absorber tank, for the unit, sized to contain the complete slurry of one absorber tank at its maximum level equipped with all necessary pumps, valves, piping and controls to transfer the tank's contents back to the absorber to refill the absorber sump. It should be possible to discharge the each absorber into the Auxiliary Absorbent tank within 2 hours.
154.	V//B	I-M1	3 of 51	1.03.08	In case of a power failure all items of equipment (e.g. minimum one agitator in absorber and limestone slurry tank, Process water pump & lube oil system of Booster Fan & Ball Mill) which may cause irreversible damage to the FGD System shall be connected to the emergency power supply system to be provided by the Contractor. Bidder shall furnish a list of all such Auxiliaries in their bid proposal.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
155.	V/B	I-M1	39 of 51	16.01.03	The flue gas duct upto Booster Fan inlet shall be designed for ± 660 mm w.g. at 67% of yield strength of material. The flue gas duct from Booster Fan outlet shall be designed for $+ 660$ mm & $- 150$ mm wg or maximum conceivable pressure of the Booster Fan, whichever is higher, at 67% of yield strength of material.
156.	V/B	I-M1	8 of 51	4.01.01 3 (iii)	Pressure at Booster Fan suction 0 mmWc
157.	V/B	I-M1	16 of 51	5.04.00	Each absorber The pumps shall be designed to meet the stipulations of Clause No.8.00.00 of this Sub-Section.
158.	V/B	I-M1	20 of 51	5.06.22	In case of Spray Tower System, Suction screens shall be installed inside the Absorber vessel to protect the Slurry recirculation pumps. In case Bubbling type, the Slurry recirculation pumps. In

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
				suction strainers shall be installed at the suction side of Gas Cooling Pumps. For the agitators a flushing system for start ups shall be provided.	case Bubbling type, suction strainers shall be installed at the suction line side of Gas Cooling Pumps. The Screens shall be made of made of Alloy 59 /C276 or abrasion resistant FRP/Polypropylene (in case Contractor/Collaborator has proven experience). For the agitators a flushing system for start ups shall be provided.
159.	V/I/B	I-M1	20 of 51	5.06.21 The bottom for this. The bottom of the absorber sump shall be designed in such a way that complete drainage of the absorption liquid/slurry is possible and is accessible without damage of lining/rubber.	The bottom for this. The bottom of the absorber sump shall be designed in such a way that complete drainage of the absorption liquid/slurry is possible and is accessible without damage of lining.
160.	V/I/B	I-M1	22 of 51	6.03.05 In addition, a hand wheel with proper access shall also be provided for manual operation of the gate. The force at the rim of the hand wheel shall not exceed 35 kg with bunker full of coal.	In addition, a hand wheel with proper access shall also be provided for manual operation of the gate. The force at the rim of the hand wheel shall not exceed 35 kg with bunker full of limestone .

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
161.	V/B	I-M1	22 of 51	6.05.01 (ii)	Flow 110% of limestone requirement of all the absorbers at Design point
162.	V/B	I-M1	24 of 51	6.07.03	The limestone load operation. The slurry pipes shall be lined with replaceable wear resistant natural rubber lining of minimum 6 mm thickness. Additional thickness of 2 mm in rubber lining shall be provided at bends.
163.	V/A	V	3 of 26	2.00.00	The Flue Gas Desulphurisation (FGD) System FOR MOUDA-II 2X660 MW, TANDA-II 2X660 MW, NABINAGAR-I 3X660 MW & BARH-I 3X660 MW shall be designed to comply with the requirements stipulated under 'Guarantee point and Design point' in the table below: and 273.15 K.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING			READ AS		
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.						
164.	V/A	V	1 of 26	1.00.00 7 (iii)	H ₂ O (% v/v wet)	10.910	3.958	H ₂ O (% v/v wet)	10.910	13.958
165.	V/A	V	4 of 9	4.01.04	2x100% Centrifugal/ positive displacement type oxidation blowers / compressors.			2x100% electric motor driven, single-stage, integrally geared, single or dual vane centrifugal type oxidation blowers complete with integral gearbox, lube oil system, instrumentation and accessories. The blowers will be used for supplying a variable volume of air to the absorber reaction tank		
166.	V/B	I-M1	8.05.00	30 of 51	The pump casing should be radially split to allow easy removal of impeller.			In case of pump with rubber lined casing, the casing should be radially split to allow easy removal of impeller.		

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
167.	V//B	I-M1	30 of 51	8.07.00	For absorber recirculation service a Silicon carbide/ hi-chrome impeller and SiC lining for casing can also be accepted if the manufacturer has supplied a similar pump for a previous installation for similar service

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
168.	V//B	I-M1	11 of 51	4.04.00	ID fans: Fan casing material thickness Abrasion and wear resistant, high BHN steel having minimum 8.0mm thickness or 12mm mild steel with liner of thickness 10mm (min.) Alternatively, 22 mm thickness casing of mild steel is also acceptable.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS												
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.														
169.	VII/A	VII	6 of 61	1.02.00	<table><tr><th colspan="2">Gates in Flue Gas System</th></tr><tr><td>1. Seals</td><td>1 set of each type (Set means complete replacement for one gate)</td></tr><tr><td>2. Actuator</td><td>1 no. of each type & rating</td></tr><tr><td>3. Expansion joint</td><td>1 number for each type and size</td></tr><tr><td>4. Seals for guillotine gate (Both port side and bonnet side) (In case Gates are provided)</td><td>1 set for each gate</td></tr></table>	Gates in Flue Gas System		1. Seals	1 set of each type (Set means complete replacement for one gate)	2. Actuator	1 no. of each type & rating	3. Expansion joint	1 number for each type and size	4. Seals for guillotine gate (Both port side and bonnet side) (In case Gates are provided)	1 set for each gate			
Gates in Flue Gas System																		
1. Seals	1 set of each type (Set means complete replacement for one gate)																	
2. Actuator	1 no. of each type & rating																	
3. Expansion joint	1 number for each type and size																	
4. Seals for guillotine gate (Both port side and bonnet side) (In case Gates are provided)	1 set for each gate																	
170.	VII/A	VI	20 of 24	4.02.00 (vi)	<table><tr><th colspan="2">Waste Water</th></tr><tr><td>1. Seals</td><td>1 set of each type & size (Set means complete replacement for one gate)</td></tr><tr><td>2. Actuator</td><td>1 no. of each type & rating</td></tr><tr><td>3. Expansion joint</td><td>1 number for each type and size</td></tr></table>	Waste Water		1. Seals	1 set of each type & size (Set means complete replacement for one gate)	2. Actuator	1 no. of each type & rating	3. Expansion joint	1 number for each type and size	<table><tr><th colspan="2">Waste Water</th></tr><tr><td>The Contractor guarantees that the maximum purge flow rate to waste water treatment system for the complete plant shall be 10m³/hr</td><td>The Contractor guarantees that the maximum purge flow rate to waste water treatment system for Barh-I (3X660 MW) shall be 30 m³/hr</td></tr></table>	Waste Water		The Contractor guarantees that the maximum purge flow rate to waste water treatment system for the complete plant shall be 10m ³ /hr	The Contractor guarantees that the maximum purge flow rate to waste water treatment system for Barh-I (3X660 MW) shall be 30 m ³ /hr
Waste Water																		
1. Seals	1 set of each type & size (Set means complete replacement for one gate)																	
2. Actuator	1 no. of each type & rating																	
3. Expansion joint	1 number for each type and size																	
Waste Water																		
The Contractor guarantees that the maximum purge flow rate to waste water treatment system for the complete plant shall be 10m ³ /hr	The Contractor guarantees that the maximum purge flow rate to waste water treatment system for Barh-I (3X660 MW) shall be 30 m ³ /hr																	

LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 103 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
				averaged over a 24 hour period from each unit.	averaged over a 24 hour period and for Nabinagar (4x250 MW) shall be 20 m ³ /hr averaged over a 24 hour period from each unit
171.	V/B	I-M1	31 OF 51	10.01.00	All the slurry tanks (Slurry Tanks..... in accordance with the IS:803, latest edition. Additional Corrosion allowance of 1.5 mm on the minimum tank shell Coarse-screen(s) at suction-side of these pumps shall be provided.
172.	V/B	I-M1	29 OF 51	7.08.02	The contractor shall provide 1x100% pump to pump back the slurry from the sump back to the absorber in a maximum time of 8 hours.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
173.	V//A	III-A1	4 of 9	6.01.00	The employer shall provide a common auxiliary absorbent tank, common for all the units, of sufficient capacity for storage of absorber slurry of one unit.	The Contractor shall provide a common auxiliary absorbent tank, common for all the units, of sufficient capacity for storage of absorber slurry of one unit.
174.	V//A	III-A1	1 of 9	1.03.00	The FGD system shall for each Lot 1A Project. The contractor shall also supply an auxiliary absorbent tank, common for the two units, for storage of absorber slurry of one unit. The contractor's scope shall include the absorbers, common limestone grinding system and gypsum dewatering system.	The FGD system shall for each Lot 1A Project. The contractor shall also supply an auxiliary absorbent tank, common for all units in a project , for storage of absorber slurry of one unit. The contractor's scope shall include the absorbers, common limestone grinding system and gypsum dewatering system.
175.	VI/B	I-M1	22 of 51	6.05.01	There shall be 2X100% tube mills for grinding of limestone. Each mill 13 (min).	There shall be 2X100% wet ball mills for grinding of limestone. Each mill 13 (min).

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
176.	V/B	I-M1	7 of 51	3.03.08	All the gates shall be designed for tight shut off. The Guillotine gate type dampers mentioned at condition without the use of seal air fans of the damper. The Guillotine gates shall also be provided with a 2X100% complete seal air system. The bypass damper shall minimum one type of damper of each type and size.
177.	V/A	V	8 of 26	5.01.00	A "wet Chimney" shall be without FGD system in operation. The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11. External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet over insulation. The wet stack shall be designed as per the guidelines of EPRI Revised Wet Stack Design Guide.<

**LOT 1A PROJECTS
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2**

**AMENDMENT NO.
CS-0011-109(1A)-2-AMDT-03(T)**

Page 106 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
				18 at Design Point	(minimum) mild steel with Borosilicate Glass Block Lining of minimum 38 mm thickness, which should have been in successful operation for similar application in at least two (2) units, located at different locations, for a period not less than two (2) years as on the date of Techno-Commercial bid opening. In such a case, Contractor/Lining supplier shall provide a ten (10) year full replacement guarantee and fulltime onsite QA supervision, during erection & commissioning, by the supplier of the lining system. External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet.<< 18 at Design Point
178.	V/I/B	I-M1	6 of 51	3.02.04	The duct to Absorber inlet thickness. The duct from Absorber outlet to bypass duct shall be made of Carbon steel of minimum 7mm thickness clad

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
179.	VII/B	I-M1	19 of 51	5.06.11	with 2 mm (minimum) thickness Alloy C276 / Alloy 59 or better material. The complete absorber vessel (absorber oxidation tank, absorber tower & absorber outlet duct) shall be made of clad sheet of C276 / Alloy 59 (minimum 2 mm thickness) having minimum 7 mm thick carbon steel as base material.
180.	VII/A	III-A1	6 of 9	8.02.00	The contractor system. The Interior surface of the Sumps shall be lined with replaceable chlorobuty/bromobutyl rubber lining of minimum 5 mm thickness or with vinyl ester based flake glass lining of minimum 3 mm thickness.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
181.	VII/A	VII	6 of 61	1.04.00	Absorber 1. Absorber Spray/Oxidation nozzles 10% of each type and size 2. Absorber Mist Eliminator Washing Nozzles 10% of each type and size 3. Absorber Mist Eliminator 5% of each type and size/configuration
182.	VI/B	I-M1	25 of 51	7.03.01	Each set of primary dewatering hydro-cyclone shall be sized to dewater the gypsum slurry produced by the unit operating at Design point with an additional 10% margin. The outlet water content in the gypsum Each set of primary dewatering hydro-cyclone shall be sized to dewater the gypsum slurry produced by all the unit operating at Design point with an additional 10% margin. The outlet water content in the

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
				shall be as per the requirement of the vacuum belt filters.	gypsum shall be as per the requirement of the vacuum belt filters.
183.	SECTION -VI/ Part-A	III-A2	3 of 4	3.00.00(i)	Complete compressed air and piping network for service air and instrument air application in FGD and ZLD system (if provided). Separate piping network for Service Air and Instrument Air shall be provided.
184.	SECTION -VI/ Part-A	VII MANDATORY SPARES	12 of 61	1.19.00	The referred clause stands deleted.
185.	SECTION -VI/ Part-A	III-A3 Fire Fighting System	1 of 2	1.2	HVW Spray System: Automatic fire detection cum high velocity water spray system shall be provided for various transformers (having oil capacity 2000 liters or more) envisaged under this

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
186.	SECTION -VI/ Part-A	III-A3 Fire Fighting System	1 of 2	1.00.00 (1.4)	Five numbers each type of Portable fire extinguishers consisting of water type, dry chemical powder type, CO2 type shall be provided in various facilities of FGD system.	package. Tapping for HVW spray system shall be provided from nearby existing hydrant header.
187.	SECTION -VI/ Part-B	I-M3 COMPRESSED AIR SYSTEM	1 OF 7	1.01.00	The compressed air system shall consist of Air compressors & their motor drives, Air Drying (ADPs) Plants, air receivers for each Air compressors, instrumentation and control, control panels, compressed air piping, Instrument Air Piping	The contractor shall supply the following quantity (minimum) of fire extinguishers and install the same at various locations of FGD system as per TAC requirement. 1. Pressurized water type (9lit. capacity as per IS 15683): 5 nos 2. Co2 type (4.5 kg Cap IS:15683): 5 nos 3. Dry chemical type (6 kg Cap IS:15683) : 5 nos

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
				network, service air piping network and Unit Instrument Air receivers (One for each unit)	network, service air piping network etc.
188.	SECTION -VI/ Part-B	I-M3 COMPRESSOR AIR SYSTEM	2 of 7	3.01.00	Air Compressors (screw type) shall be designed for continuous operation with high efficiency to satisfy the performance requirement as per approved data sheet submitted by the bidder during detailed engineering
189.	SECTION -VI/ Part-B	I-M3 COMPRESSOR AIR SYSTEM	2 of 7	3.04.00	The clause stands deleted.
190.	SECTION -VI/ Part-B	I-M4 Fire Detection & Protection System	1 of 18	3.01.00	HVW AND MVW SPRAY SYSTEM General It shall consists of water mains network, deluge valves, isolation valves, Y type strainers, spray nozzles/ projectors, spray nozzles
LOT 1A PROJECTS				AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 112 of 117
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE					
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
		m		isolation valves, Y type strainers, spray nozzles/ projectors, spray nozzles piping network, detection system, instrumentation, local control panels, cables etc..	piping network, detection system, instrumentation, local control panels, cables etc.
191.	SECTION -VI/ Part-B	I-M2 Air Conditioning and Ventilation	1 of 26	3.01.00	Modular type UAF units of suitable capacity (1x100%) shall be provided for non-air conditioned area of FGD control room /FGD cum ZLD control room building considering design philosophy for evaporative type ventilation system mentioned in clause 7.03.00, sub section- V (salient design data and sizing), Part-A of technical specification section VI. All non-air conditioned area of FGD (cable gallery& MCC room shall be positively ventilated and exhaust shall be through gravity damper.
192.	VI/ A	VI	22 of 24	5.00.00(xxii)	Total power consumption at motor input terminal at rated duty of fan of UAF divided by total nos. of units in respective project. (*) Total power consumption at motor input terminal at rated duty of fan of UAF divided by total nos. of units in respective project. (*) ((*) Above guaranteed power consumption values shall be at 20 deg C for centrifugal fans of AHUs
LOT 1A PROJECTS FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE BIDDING DOCUMENT NO.: CS-0011-109(1A)-2				AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)	Page 113 of 117

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
				and at 30 deg C for centrifugal fans of air washer units and at an elevation of RL (+) - m for both AHUs and Air washer unit centrifugal fans.)	and at 30 deg C for centrifugal fans of UAF and at an elevation of RL (referring to GLP of respective projects) for both AHUs and UAF centrifugal fans.)
193.	VI/B	I-M4	Page 2 of 18	5.02.00 (iii)	Above and Below false ceiling areas of all air-conditioned rooms of FGD and ZLD (as provided) control room building, various control rooms of auxiliaries as defined in Sl. No. (i) above.
194.	VI/	I-M2	Page 2 of 26	3.02.00 (iii)	Battery rooms & Oil rooms and fumes/odor generates ; Combination of intake louvers & Exhaust air/ roof extractor fans. Motors shall be flame proof.

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS																			
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.																					
195.	V/A	II-A10	30 of 30	List of Drawings	---	Pipe cable trestle layout: (a) To (c) 9558-360-POC-C-307-sh1,2,3. (d) 9558-102-PVM-W-0023 Pipe cable trestle foundation: (a) 9558-360-POC-C-312 (b) 9558-102-PVC-V-029A Refer Annexures- A(i) to A(vi)																			
196.	V/A	II-A11	29 of 29	List of Drawings	<table><tr><th colspan="3">Table-6</th></tr><tr><td>5.</td><td>Pipe Cable Trestle Layout</td><td>Not located near FGD area</td></tr><tr><td>6.</td><td>Pipe Cable Trestle Foundation</td><td>Not located near FGD area</td></tr></table>	Table-6			5.	Pipe Cable Trestle Layout	Not located near FGD area	6.	Pipe Cable Trestle Foundation	Not located near FGD area	<table><tr><th colspan="3">Table-6</th></tr><tr><td>5.</td><td>Pipe Cable Trestle Layout</td><td>0270-315-POC-C-589-SH3</td></tr><tr><td>6.</td><td>Pipe Cable Trestle Foundation</td><td>0270-315-POC-C-589-SH1</td></tr></table>	Table-6			5.	Pipe Cable Trestle Layout	0270-315-POC-C-589-SH3	6.	Pipe Cable Trestle Foundation	0270-315-POC-C-589-SH1	Refer Annexures- B(i) to B(ii)
Table-6																									
5.	Pipe Cable Trestle Layout	Not located near FGD area																							
6.	Pipe Cable Trestle Foundation	Not located near FGD area																							
Table-6																									
5.	Pipe Cable Trestle Layout	0270-315-POC-C-589-SH3																							
6.	Pipe Cable Trestle Foundation	0270-315-POC-C-589-SH1																							

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
197.	VI/P ART- A			General Layout Plan 1. Kudgi (3x800 MW) 9573-999-POC-F-001 Rev.6D1 2. Lara (2x800 MW) 9548-999-POM-F-001 Rev.6D0 3. Gadarwara (2x800 MW) 9572-999-POC-F-001 Rev.5D1 4. Darlipali (2x800 MW) 9549-999-POC-F-001 Rev.09 5. Mouda (2x660 MW) 9561/9575-999-POC-F-001 Rev.11-D0 6. Solapur (2x660 MW) 9571-999-POC-F-001 Rev.5D0 7. Tanda (2x660 MW) 9562-999-POC-F-002 Rev.8D1 8. Nabinagar JV (3x660 MW) 0370-999-POC-F-001 Rev.9	General Layout Plan 1. Kudgi (3x800 MW) 9573-999-POC-F-001 Rev.7 2. Lara (2x800 MW) 9548-999-POM-F-001 Rev.8 3. Gadarwara (2x800 MW) 9572-999-POC-F-001 Rev.6 4. Darlipali (2x800 MW) 9549-999-POC-F-001 Rev.10 5. Mouda (2x660 MW) 9561/9575-999-POC-F-001 Rev.11 6. Solapur (2x660 MW) 9571-999-POC-F-001 Rev.5 7. Tanda (2x660 MW) 9562-999-POC-F-002 Rev.9 8. Nabinagar JV (3x660 MW) 0370-999-POC-F-001 Rev.10 9. Meja (2x660 MW)
		II-A1			
		II-A2			
		II-A3			
		II-A4			
		II-A-5			
		II-A6			
		II-A7	-		
		II-A8			
		II-A9			
		II-A10			
		II-A11			

AMENDMENT NO. 3 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.		
				9. Meja (2x660 MW) 0360/0361-999-POC-F-001 Rev.6D0 10. Barh (3x660 MW) 9558/9560-999-POC-F-001 Rev.8D0 11. Nabinagar (4x250MW) 0270-999-POC-F-001 Rev. 6	0360/0361-999-POC-F-001 Rev.7. 10. Barh (3x660 MW) 9558/9560-999-POC-F-001 Rev.8 11. Nabinagar (4x250MW) 0270-999-POC-F-001 Rev. 8

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
1.	SECTI ON – VI, PART-B	SUB-SECTI ON-III-C2 MEASURING INSTRUMENTS	19 to 30 of 34	10.00.00, 10.01.00, 10.02.00, 10.03.00, 10.04.00, 11.00.00, 11.01.00, 11.02.00, 11.03.00, 11.04.00, 11.05.00, 11.06.00, 11.07.00, 11.08.00	Clauses 10.00.00 to 10.04.00 and clauses 11.00.00 to 11.08.00	Clauses 10.00.00 to 10.04.00 and clauses 11.00.00 to 11.08.00 replaced as per attached C&I Annexure-I
2.	SECTI ON – VI, PART-A	SUB-SECTI ON-VII, Mandat ory Spares	44 of 61	Main clause 1.25.00	Clause no. 1.01.01, 1.01.02, 1.01.03, 1.01.04, 1.02.00, 1.03.00A, 2.07.00	Clause no. 1.01.01, 1.01.02, 1.01.03, 1.01.04, 1.02.00, 1.03.00A, 2.07.00 (Main clause 1.25.00 CONTROL AND INSTRUMENTATION) replaced as per attached C&I Annexure-II .
3.	SECTI ON – VI, PART-A	SUB-SECTI ON-VII, Mandat ory Spares	44 of 61	Main clause 1.25.00	---	New Clause no. 1.01.05 added in mandatory spare main clause 1.25.00 as per attached C&I Annexure-II .

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
4.	SECTION - VI, PART-A	SUB-SECTION-VII, Mandatory Spares	55 of 61	Main clause 1.26.00 ELECTRICAL	Mandatory spare Clause no. 1.02.00 ELECTRICAL ACTUATOR	Mandatory spare Clause no. 1.02.00 ELECTRICAL ACTUATOR (Main clause 1.26.00 ELECTRICAL) replaced as per attached C&I Annexure-II.
5.	SECTION - VI, PART-B	SUB-SECTION-II-E8 ELECTRICAL ACTUATOR WITH INTEGRAL STARTERS	1 to 5 of 5		SUB SECTION-II-E8 ELECTRIC ACTUATOR WITH INTEGRAL STARTERS	CHAPTER DELETED
6.	SECTION - VI,	SUB-SECTION-III-C-8	1 to 4 of 4		SUB-SECTION-III-C-8 ELECTRIC ACTUATORS	NEW CHAPTER ADDED as per attached C&I Annexure-III.
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS BIDDING DOCUMENT NO.: CS-0011-109(1A)-2						AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T) Page 2 of 60

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
	PART-B	ELECTRIC ACTUATORS				
7.	SECTION - VI, PART-B	SUB-SECTION-III-C2 MEASURING INSTRUMENTS	2 of 34	2.01.00	2.01.00 SPECIFICATION FOR ELECTRONIC TRANSMITTER FOR PRESSURE, DIFF PRESS AND DP BASED FLOW / LEVEL MEASUREMENTS	Clauses 2.01.00 SPECIFICATION FOR ELECTRONIC TRANSMITTER FOR PRESSURE, DIFF PRESS AND DP BASED FLOW / LEVEL MEASUREMENTS updated as per attached C&I Annexure-IV.
8.	SECTION - VI, PART-B	SUB-SECTION-III-C2 MEASURING INSTRUMENTS	10 of 34	3.05.00	3.05.00 TEMPERATURE TRANSMITTER (TT)	3.05.00 TEMPERATURE TRANSMITTER (TT) updated as per attached C&I Annexure-IV.
9.	SECTION - VI, PART-B	SUB-SECTION-III-C2 MEASURING INSTRUMENTS	34 of 34	New clause 15.00.00	--	New clause 15.00.00 Vibration Monitoring System (VMS) added as per attached C&I Annexure-IV.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
		INSTRUMENTS				
10.	SECTION - VI, PART-B	SUB-SECTION-III-C2 MEASURING INSTRUMENTS	34 of 34	New clause 16.00.00	--	NEW clause 16.00.00 FIELD INSTRUMENTS BASED ON FIELD BUS added as per attached C&I Annexure-IV .
11.	SECTION - VI, PART-B	SUB-SECTION-III-C9 CONTROL DESK & PANELS	1 to 3 of 3		----	SUB-SECTION-III-C9 CONTROL DESK & PANELS NEW CHAPTER ADDED as per attached C&I Annexure-V .

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
12.	SECTION - VI, PART-B	SUB-SECTION-III-C5 PLC BASED CONTROL SYSTEM			SUB-SECTION-III-C5 PLC BASED CONTROL SYSTEM	CHAPTER replaced with SUB-SECTION-III-C5, DDCMIS as per attached C&I Annexure-VI.
13.	SECTION - VI, PART-B	SUB-SECTION-III-C5 PLC BASED CONTROL SYSTEM			---	SUB-SECTION-III-C5 PLC BASED CONTROL SYSTEM

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
14.	SECTION VI, PART-A	SUB-SECTION-III-B	2 of 6	1.05.00	Electric actuators with integral starters along with associated accessories etc shall be supplied on as required basis for Valves / Dampers to meet the functional and the other specification requirements.	DELETED.
15.	SECTION VI, PART-A	SUB-SECTION-III-C C&I	1 to 9		Sub Section IIIC/Part-A.	Replacing existing IIIC/Part-A with attached C&I Annexure-VIII.
16.	SECTION VI, PART-E	Tender drawing C&I	13 of 53 (of PDF)		Standard configuration drawing for PLC based offsite control system. Tender drawing no. 0000-151-POI-A-013.	Standard configuration drawing for control system. Tender drawing no. 0000-151-POI-A-013 updated and attached as per C&I Annexure-IX.
17.	SECTION VI, PART-B	SUB-SECTION-I-M6, LINES TONE HANDLING	13 OF 73	4.9.6	Specification of vibration monitoring system	DELETED

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
		PLANT (LHP)			
18.	SECTION - VI, PART-A	SUB-SECTION-III-A1, FGD	7 OF 9	11.01.00	Gypsum Dewatering system & FGD common control room & containerised room (portable cabin) for analysers. The buildings must be complete.....
19.	SECTION - VI, PART-B	SUB-SECTION-III-11 Containerised cabin (Portable room)			SUB-SECTION-III-11 CONTAINERISED ROOM (PORTABLE CABIN) SEPARATE CHAPTER ADDED as per attached C&I Annexure-X .

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
19(a)	SECTION VI, PART-A	SUB-SECTION N-VII, Mandatory Spares	21 of 61	1.22.00 FIRE DETECTION AND PROTECTION SYSTEM	-	New Clause no. 7.5 and 7.6 added in mandatory spare main clause 1.22.00 as per attached C&I Annexure-II.
19(b)	SECTION VI, PART-A	SUB-SECTION ON-III-A2,	1 of 4 2 of 4	Clause 1.00.00 g) Clause 2.00.00 g)	Contractor shall provide control system is also acceptable. Contractor shall provide control system is also acceptable.	Control and monitoring of air conditioning and ventilation system shall be done from FGD control system. Control and monitoring of air conditioning and ventilation system shall be done from FGD control system.
19(c)	SECTION VI, PART-B	SUB-SECTION N-I-M2, AIR CONDITIONING AND VENTILATION	19 of 26	Clause 7.02.01	Contractor shall provide control system is also acceptable.	Control and monitoring of air conditioning and ventilation system shall be done from FGD control system.
20.	V/B	11-E4	4 OF 6	2.14.04	Cables shall be armoured type if laid in CHP area or directly buried	Cables shall be armoured type if laid in CHP area, directly buried and FGD Lime Stone and Gypsum Handling area
21.	V/B	11-E6	6 OF 69	3.05.01	Termination..... (Tender drg. No 0000-211-POE-A-51-RA of cable lug attached at the end of this chapter.)	Termination..... (Tender drg. No 0000-211-POE-A-51-RA of cable lug attached at the end of this chapter.) Tender drawing attached as Electrical Annexure E3- 0000-

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS									
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.											
						211-POE-A-51-RA.									
22.	V/IB	II-E15	10 OF 16	4.01.00.19	In the Offsite area/buildings DC lighting shall be provided by self-contained 90 minutes duration Emergency lighting fixtures .Each shall be provided with Ni-Cd battery, battery charger & 2X10 W fluorescent lamps.	Deleted									
23.	V/IB	II E6	2 of 23	2.01.01	Interplant cabling..... All buried cables shall be armoured.	Interplant cabling Cables crossing Railway line (if applicable) shall be laid underground through nearest culvert. Necessary statutory clearance if required shall be taken by Bidder									
24.	V/IA	IIIB	5 of 6	1.15.00	---NA---	Size of ESP standby transformers to be fed from 11kV FGD switchgear are as follows: <table><tr><td>Kudgi, Solapur, Barh-I</td><td>Lara, Mauda-II, Meja New nabinagar.</td><td>1.6MVA</td></tr><tr><td>Darlipali, Nabinagar JV</td><td>Gadarwara, Tanda-II</td><td>2 MVA</td></tr><tr><td></td><td></td><td>1.6MVA</td></tr></table>	Kudgi, Solapur, Barh-I	Lara, Mauda-II, Meja New nabinagar.	1.6MVA	Darlipali, Nabinagar JV	Gadarwara, Tanda-II	2 MVA			1.6MVA
Kudgi, Solapur, Barh-I	Lara, Mauda-II, Meja New nabinagar.	1.6MVA													
Darlipali, Nabinagar JV	Gadarwara, Tanda-II	2 MVA													
		1.6MVA													
25.	V/IE		53		Electrical Single Line Diagram for FGD Package 0011-109-POE-J-001 rev B	Electrical Single Line Diagram for FGD Package 0011-109-POE-J-001 rev C Attached as Electrical Annexure E4- 0011-109-POE-J-001 rev C.									
26.	V/IB	II-E1	3 of 7	2.01.01	Adequate number of auxiliary transformers shall be provided to meet the demand on 11KV, 3.3KV and 415V systems under most onerous conditions, with the criteria that each 3.3KV / 415	Adequate number of auxiliary transformers shall be provided to meet the demand on 11KV, 3.3KV and 415V systems under most onerous conditions, with the criteria that									

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					V switchgear / MCC / DB shall be fed by 2x100% or 3 X 50 %, 3x100% transformers / feeders, and these shall be rated to carry the maximum load expected to be imposed. Wherever three incomer two bus coupler scheme is indicated, each incomer shall be sized to cater to load on its own bus section plus load on adjacent bus section.	each 3.3KV / 415 V switchgear / MCC / DB shall be fed by 2x100% or 3 X 50 %, transformers / feeders, and these shall be rated to carry the maximum load expected to be imposed. Wherever three incomer two bus coupler scheme is indicated, each incomer shall be sized to cater to load on its own bus section plus load on adjacent bus section.
27.	V/B	II-E12	1.01.00 (s)	4 of 31	TECHNICAL PARAMETERS (s) Termination Details (Indicative only) (3) LV Phase Terminal 3.45kV- Busduct	TECHNICAL PARAMETERS (s) Termination Details (Indicative only) (3) LV Phase Terminal 3.45kV- Busduct
28.	V/B	II-E12	1.01.00 (n) 5 Method of neutral earthing and Vector group	2 of 31	REPLACE EXISTING TABLE.	ATTACHED TABLES— Electrical Annexure E1
29.	V/B	II-E12	1.01.00 (p)	3 of 31	REPLACE EXISTING TABLE.	ATTACHED TABLES— Electrical Annexure E1

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
30.	V/B	II-E12	1.01.00 (r)	4 of 31	REPLACE EXISTING TABLE.	ATTACHED TABLES— Electrical Annexure E1
31.	V/B	II-E12	1.01.00 (t)	5 of 31	REPLACE EXISTING TABLE.	ATTACHED TABLES— Electrical Annexure E1
32.	V/B	II-E18	---	---	-----	VARIABLE FREQUENCY DRIVE (VFD) chapter added as Electrical Annexure E2
33.	V/A					Variable Frequency Drive (VFD) The VFD system shall be provided for the equipment drive motors as envisaged in relevant portions of the specifications for equipment. The system shall be either Voltage Source Inverter (VSI) or Current Source Inverter (CSI) type. Complete VFD system along with associated equipment, HT/LT panel, HT/LT cable, Transformer etc. as applicable shall be provided. Bidder to provide Air-conditioned room to house Variable Frequency Drive (VFD).
34.	V/B	II-E1	4 of 7	2.05.00 (c)		In case of any augmentation in owners HT switchgear (for ID booster fan motors), bidder shall make necessary provisions for switchgear control from owners DDCMIS/FGD DDDCMIS/FGD PLC (as decided during detailed engineering).

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
34(a)	V//B	II-E2	2 of 9	3.01.00 b)	Continuous duty LT motors upto 200 KW Output rating (at 50 deg.C ambient temperature), shall be Premium Efficiency class-IE3, conforming to IS 12615, or IEC:60034-30	Continuous duty LT motors upto 200 KW Output rating (at 50 deg.C ambient temperature), shall be Premium Efficiency class-IE3, conforming to IS 12615, or IEC:60034-30. HT motors shall have minimum design efficiency of 95 % Tolerance on efficiency value applicable as per IEC 60034
34(b)	V//A	D-01	1 OF 282	5.03.09, PARA 7, LINE 3	The type of aviation obstruction lighting system shall be of medium intensity aviation obstruction lights having an effective intensity of 2000 to 20,000 cd depending upon back ground illuminance. Obstacle lights shall have a day time effective intensity of minimum 20000 cd. The intensity of lights shall be 20000 cd $\pm$ 25% at twilight and shall reduce automatically to a night time intensity of 2000 cd $\pm$ 25% through the use of photo-cell. The obstacle lights shall flash simultaneously at a rate between 20 to 60 per minute. A minimum of three levels will be provided with aviation obstruction lights and there will be four light units per level. The lowest level should not be lower than 45 meters above the ground and vertical spacing of the	The type of aviation obstruction lighting system shall be of high intensity aviation obstruction lights having an effective intensity of 4000 to 200,000 cd (minimum) depending upon back ground illuminance. Obstacle lights shall have a day time effective intensity of minimum 200000 cd. The intensity of lights shall be 20000 cd $\pm$ 25% at twilight and shall reduce automatically to a night time intensity of 4000 cd $\pm$ 25% through the use of photo-cell. The obstacle lights shall flash simultaneously at a rate between 20 to 60 per minute. A minimum of three levels will be provided with aviation obstruction lights and there will be four light units per level. The

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					intermediate levels could vary between 45 and 105 meters. The intermediate lights shall be spaced as equally as possible. Aviation obstruction lighting shall be complete with lights, photo cell, controller, special cables, etc.	lowest level should not be lower than 45 meters above the ground and vertical spacing of the intermediate levels could vary between 45 and 105 meters. The intermediate lights shall be spaced as equally as possible. Aviation obstruction lighting shall be complete with lights, photo cell, controller, special cables, etc.
35.	Section VI / Part B	Sub-Section -IV-D Civil Works	2.00.00	1 of 69	"Sub QR for civil works."	" Clause Deleted"
36.	VI/B	Sub-section IVD Civil Works	1.02.00	01 of 69	The specifications are intended for the general description of the work.....in writing with the Employer in respect of interpretation of any portions of this document.	The specifications are intended for the general description of the work, quality and workmanship. The specifications are not, however, intended to cover minutest details and the work shall be executed according to the relevant latest Indian Standard Codes / I. R. S. / I. R. C. specifications. Where provisions are not covered in Indian Standards, reference shall be made to ACI, AISI, ASCE, EN, CIND and other international standards or to the best prevailing local Public Works Department practices or to the instructions of the Engineer. Some of the relevant I. S. Codes to be followed

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
					are mentioned in the Technical Specifications. The Contractor is expected to get clarified on any doubts about the specifications, etc. before bidding, in writing with the Employer in respect of interpretation of any portions of this document.
37.	VII/A	II- A1/A3/ A4/A5/ A6/A7/ A9/A11 Project Informa tion	5.00.00	SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT	“SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” given in “Civil Annexure-1” to this amendment shall replace the “SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” at Clause 5.00.00, Sub-section-II- A1/ A3/A4/A5/A6/A7/A9/A11, Part-A, Sec-VI, of Tech. Specification.
38.	Amendment	No.03. to specification (Section-VI) (Amendment No. CS-0011-109(1A)-2-AMDT-03(T)) SI.No. 13, Page-8 of 102		“SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” of Lara STPP Project	“SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” of Lara STPP Project given in “Civil Annexure-2” to this amendment shall replace the “SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” Amendment No.03. to Technical specification (Section-VI) (Amendment No. CS-0011-109(1A)-2-AMDT-03(T)), SI.No. 13, Page-8 of 102
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS				AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Page 14 of 60
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
39.	Amendment No.03. to specification (Section-VI) (Amendment No. CS-0011-109(1A)-2-AMDT-03(T)) SI.No. 14, Page-8 of 102			“SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” of Barh STPP Project	“SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” of Barh STPP Project given in “Civil Annexure-3” to this amendment shall replace the “SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” at Amendment No.03. to Technical specification (Section-VI) (Amendment No. CS-0011-109(1A)-2-AMDT-03(T)), SI.No. 14, Page-8 of 102
40.	Errata No.01 to Technical specifications, Section-VI (Doc. No.:CS-0011-109(1A)-2-ERRATA-01)			“SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” of Nabinagar STPP Project (3x660MW)	“SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” of Nabinagar STPP (3x660MW) Project given in “Civil Annexure-4” to this amendment shall replace the “SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT” at Errata No.01 to Technical specification (Doc. No.:CS-0011-109(1A)-2-ERRATA-01).

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
41.	Section VI / Part B	Sub-Section -IV-D Civil Works	17.01.00	35 of 69	Design of steel structures shall be done by working stress method. Design shall be as per provisions of IS:800:1984.	Design of steel structures shall be done as per provisions of IS:800: 2007 (Limit state design) and other relevant IS standards.
42.	Section VI / Part B	Sub-Section -IV-D Civil Works	17.26.00	38 of 69	-	For industrial structures, analysis for verification of mechanism shall be carried out as per IS:1893 (Part 4):2015 for Earthquake loads.
43.	Section VI / Part B	Sub-Section -IV-D Civil Works	17.27.00	38 of 69	-	Design drawings of steel structures shall include the connection, joint & fastener details for Main columns, Beams & Bracings.
44.	V/A	IIA2	BORE LOG	Page:23 to 39 of 48	BH No.53,54,55,57,58,60,163,164	“Bore Logs” given in “Civil Annexure-5” to this amendment shall replace the contents of Bore Logs, Page 23 to 39 of 48 , Sub-section- II-A2, Part-A Sec-VI, of Tech. Specification.
45.	V/B	IV-D	3.01.00(a)	4 of 69	-----	New Clause: Limestone Storage Silo The supporting structure for silo shall be of structural steel. Independent supporting structure shall be provided for each silo.
46.	Amendment No. 03 to technical specification (Section-VI) Sl. No. 02, Page 2 of 102				Single-flue chimney(s) shall be provided. Chimney shall be of reinforced concrete construction. There shall be one flue (liner) for	Single-flue chimney(s) shall be provided, except for Tanda TPP (2X660MW) and Meja TPP (2X660MW) where twin-flue

FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Page 16 of 60
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2		

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					each unit. The flue gas emission point shall be minimum 150 meters above the plant grade level. The centre to centre distance between the proposed chimney(s) and the existing chimney(s) in any direction shall not be less than 150 metres.	Chimney shall be provided. Chimney shall be of reinforced concrete construction. There shall be one flue (liner) for each unit. The flue gas emission point for single flue chimney shall be minimum 150 meters above the plant grade level and for twin flue chimney flue gas emission point shall be minimum 220m above the plant grade level. The centre to centre distance between the proposed chimney(s) and the existing chimney(s) in any direction shall not be less than 150 metres. For Barh-I (3X660MW) already existing 275m high chimneys shall be utilized with modifications as specified elsewhere in mechanical specification and hence, new chimney is not to be provided under FGD package. General Arrangement Drawing of already existing Chimneys at Barh-I are provided in Sub Section-II -A10, Part A, Section-VI for reference.
47.	VI/B	IV-D	3.14.01 Para 3	11 of 69	The flue duct outside the chimney shall be suitably connected to the flue liner inside the chimney through a transition duct. The transition duct shall be bottom supported and shall be profiled into a circular shape to connect to the	The flue duct outside the chimney shall be suitably connected to the flue liner inside the chimney through a transition duct. The transition duct shall be profiled into a circular shape to connect to the flue liner. The flue

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					flue liner. The flue duct shall be so designed that no load is transferred on the chimney shell due to the duct. The interface between the flue liner and the transition ducting shall be provided with non-metallic fluoroelastomeric fabric expansion joint.	duct shall be so designed that no load is transferred on the chimney shell due to the duct. The interface between the flue liner and the transition ducting shall be provided with non-metallic expansion joint.
48.	VI/B	IV-D	3,14.01 Para 4	11 of 69	The expansion joint in the flue liner shall comprise of non-metallic fluoroelastomeric material suitable to withstand a temperature of 300 Deg C , shall be acid resistant to withstand acidic flue gas condensates arising out of flue gas parameters & operating conditions as specified elsewhere in the specification and shall also prevent dust accumulation. The space between the expansion joint material and the liner shall be packed and sealed by providing a bolster made up of light weight compressible material suitable to withstand a temperature of 300 Deg C and acid resistant to withstand acidic flue gas condensates arising out of flue gas parameters & operating conditions as specified elsewhere in the specification. The bolster shall be confined in texturized glass fabric having a final covering of stainless steel wire mesh.	The expansion joint in the flue liner shall comprise of non-metallic material suitable for wet stack operations , shall be acid resistant to withstand acidic flue gas condensates arising out of flue gas parameters & operating conditions as specified elsewhere in the specification and shall also prevent dust accumulation. The space between the expansion joint material and the liner shall be packed and sealed by providing a bolster made up of light weight compressible material suitable for wet stack operations and acid resistant to withstand acidic flue gas condensates arising out of flue gas parameters & operating conditions as specified elsewhere in the specification. The bolster shall be confined in texturized glass fabric having a final covering of stainless steel wire mesh. Design of expansion joint shall comply EPRI guideline to avoid contact of condensate with expansion joint material and to ensure drainage of condensate.
49.	VI/B	IV-D	3,14.01 Para 5	11 of 69	Chimney roof shall be of RCC slab over a grid of structural steel beams and provided with rainwater drainage system. An internal structural steel staircase supported from chimney shell	Chimney roof shall be of RCC slab over a grid of structural steel beams and provided with rainwater drainage system. An internal structural steel staircase supported from

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					with chequered plate floor panels and pipe handrails, shall be provided for full height of the chimney and an internal cage ladder for a small height, over last staircase landing to access the chimney roof through a roof access hatch.	chimney shell with chequered plate floor panels and pipe handrails, shall be provided upto the platform just below roof platform and an internal cage ladder for a small height, over last staircase landing to access the chimney roof through a roof access hatch.
50.	VI/B	IV-D	3,14.01 Para 6	11 of 69	The other components of the chimney include liner test ports (for continuous pollution monitoring), liner hatches, grade level slab of RCC with metallic hardener floor finish, acid resistant treatment on roof slab, a large electrically operated grill type roll-up door and personnel access metallic door at grade level, roof drain basin, rain water down comer pipe (150 mm diameter galvanized pipe), connection to plant drains, louvers with bird screens for ventilation and all other openings in the wind shield, mild steel wind stakes (if required) , all finishing works, electrical power distribution boards, lighting panels, power & control cabling and wiring systems, stair and platforms lighting, socket outlet, lightning protection and grounding system, aviation photoelectric controller etc, communication system, a rack and pinion elevator and other items, though not specifically mentioned but reasonably implied and necessary to complete the job in all respects.	The other components of the chimney include liner test ports (for continuous pollution monitoring), liner hatches, grade level slab of RCC with metallic hardener floor finish, acid resistant treatment on roof slab, a large electrically operated grill type roll-up door and personnel access metallic door at grade level, roof drain basin, rain water down comer pipe (150 mm diameter galvanized pipe), connection to plant drains, louvers with bird screens for ventilation and all other openings in the wind shield, all finishing works, electrical power distribution boards, lighting panels, power & control cabling and wiring systems, stair and platforms lighting, socket outlet, lightning protection and grounding system, aviation obstruction lighting with photoelectric controller etc, communication system, a rack and pinion elevator and other items, though not specifically mentioned but

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						reasonably implied and necessary to complete the job in all respects.
51.	V/B	IV-D	3.14.02 Para 7	12 of 69	The chimney and its components shall be designed to resist the most onerous forces resulting from all the possible combinations of the various loadings. Design of all chimney components shall be based on working stress method.	The chimney and its components shall be designed to resist the most onerous forces resulting from all the possible combinations of the various loadings.
52.	V/B	IV-D	3.14.03 Para 1	12 of 69	The wind shield shall be designed for vertical loading, cross wind loading, seismic loading, circumferential wind loading, thermal gradients etc. The load calculation and load combinations shall be as detailed in IS 4998 (Part 1) : 1992. The wind shield shall be analysed for cases with and without flue liner loads.	The wind shield shall be designed for vertical loading, cross wind loading, seismic loading, circumferential wind loading, thermal gradients etc. The analysis and design of wind shield shall be carried out as per IS 4998 . The wind shield shall be analysed for cases with and without flue liner loads.
53.	V/B	IV-D	3.14.03 Para 2	12 of 69	Forces/stresses in the wind shield due to eccentricity effects of local (e.g. corbel) loadings, insulations effects, rotation of chimney foundations, construction tolerances and moments of second order shall also be considered.	Forces/stresses in the wind shield due to eccentricity effects of local loadings, insulations effects, rotation of chimney foundations, construction tolerances and moments of second order shall also be considered.
54.	V/B	IV-D	3.14.03 Para 6	12 of 69	The stresses for the shell design shall not exceed the limits given in Cl. 7.0 of IS:4998 (PART-I) 1975 for various combinations of loads, excepting the stress in concrete for the case of dead load + wind load which shall not	DELETED

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					exceed 0.30fck where fck is the characteristic compressive strength of concrete.	
55.	V/B	IV-D	3.14.03 Para 9	13 of 69	There shall not be any reverse (outward) slope in the inside face of chimney shell. Where there is a sudden change in slope/ profile of the shell, the circumferential reinforcement shall be increased to twice the requirement as per the design in a circumferential band extending atleast 3m above and below such slope/profile change level.	There shall not be any reverse (outward) slope in the inside face of chimney shell. Where there is a change in slope/ profile of the shell, the circumferential reinforcement shall be increased to twice the requirement as per the design in a circumferential band extending atleast 3m above and below such slope/profile change level.
56.	V/B	IV-D	3.14.03 Para 14	13 of 69	The final design shall be checked & verified by 'Wind Tunnel Test' and shall be conducted at a reputed institution. Dynamic interference effects due to additional chimney(s)/NDCTS's and other tall structures located in the area or in the future expansion stage of the project shall be determined along with the other topographical features of the local area through model test.	The final design shall be checked & verified by 'Wind Tunnel Test' conducted at a reputed institution. Dynamic interference effects due to additional chimney(s)/NDCTS's and other tall structures located upto distance of 20 times diameter at 2/3rd height of subject chimney , in the area or in the future expansion stage of the project, as envisaged by the owner at the time testing , shall be determined along with the other topographical features of the local area through model test.
57.	V/B	IV-D	3.14.04 Para 5	13 of 69	Clean-out door shall be provided below the flue for the removal of ash.	DELETED

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
58.	VI/B	IV-D	3.14.07 Para 5	14 of 69	The chimney foundation shall be designed for the most critical combination of forces and moments, resulting from all possible combinations of the various loadings from chimney system during all stages of constructions. The effect of water table shall be considered and the foundation shall be checked for overturning for minimum and maximum vertical loads. There should be no uplift under any loading condition. Since chimney is a wind sensitive structure no allowance shall be made in the load carrying capacity of the bearing strata / piles under any load case/combination with wind. No allowance shall be made in the stresses for design of foundation for wind loading. The foundation diameter to depth ratio shall be maintained to around 10 and should preferably not exceed 12. The diameter of the reinforcing bar for the main radial and tangential reinforcement for the foundation shall not be less than 25mm. The spacing of radial steel at the outer edge of the foundation shall not be more than 250mm. Grade of concrete for foundation shall be minimum M 25 .	The chimney foundation shall be designed as per limit state method as per IS 4998 for the most critical combination of forces and moments, resulting from all possible combinations of the various loadings from the chimney system during all stages of constructions. The effect of water table shall be considered and the foundation shall be checked for overturning for minimum and maximum vertical loads. There should be no uplift under any portion of the foundation/piles for any loading condition. Since chimney is a wind sensitive structure, no allowance shall be made in the load carrying capacity of the bearing strata / piles under any load case/combination with wind. The foundation diameter to depth ratio shall be maintained to around 10 and should preferably not exceed 12. The diameter of the reinforcing bar for the main radial and tangential reinforcement for the foundation shall not be less than 25mm. The spacing of the radial steel at the outer edge of the foundation shall not be more than 250mm. Grade of concrete for foundation shall be minimum M 30 .
59.	VI/B	IV-D	3.14.08 Para 2	14 of 69	The insulation thickness shall be determined based on the maximum/minimum ambient	DELETED

FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS

AMENDMENT NO.
CS-0011-109(1A)-2-AMDT-05(T)

Page 22 of 60

BIDDING DOCUMENT NO.: CS-0011-109(1A)-2

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					temperature, surface air velocity worked out based on the draught of ventilation air in the annular space between the flue liner and chimney shell, insulation surface emissivity of 0.3 and the insulation cold face maximum temperature not exceeding 55 degree Celsius. The draught of air in the annular space shall be the natural draught created by the heating of air by the flue liner and the air being vented out through the openings in the chimney shell. The increase in the annulus air temperature due to the rising heated air shall be taken into account while calculating the insulation thickness.	
60.	VI/B	IV-D	3.14.09 (i)	15 of 69	All exposed steel surfaces (including exterior surface of mild steel flue liner in case the design does not envisage provision of thermal insulation on the exterior surface of flue liner) except surfaces of steel wind strakes shall be painted as specified in corrosion protection clause of this specification.	All exposed steel surfaces (including exterior surface of mild steel flue liner in case the design does not envisage provision of thermal insulation on the exterior surface of flue liner) shall be painted as specified in corrosion protection clause of this specification.
61.	VI/B	IV-D	3.14.09 (ii)	15 of 69	All exposed surfaces of steel wind strakes shall be painted with epoxy phenolic coating system having total 240 microns DFT. a) All steel surfaces shall be provided with two component epoxy primer coat (having solid by volume minimum 51% ±2%) of minimum 70 micron DFT to be applied over blast cleaned surface conforming to Sa 2½ finish of ISO 8501-1 with surface profile 40-60 Micron. The primer	DELETED

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					coat shall be applied in shop immediately after blast cleaning by airless spray technique. b) Primer coat shall be followed with the application of Intermediate coat of epoxy phenolic coating (solid by volume minimum 63%) of minimum 100 micron DFT. This coat shall be applied in shop after an interval of minimum 24 hours (from the application of primer coat) by airless spray technique. c) Intermediate coat shall be followed with the application of finish coat of two-pack aliphatic Isocyanate cured acrylic finish paint (solid by volume minimum 55% ±2%) with Gloss retention (SSPC Paint Spec No 36, ASTM D 4587, D 2244, D 523) of Level 2 (after minimum 1000 hours exposure, Gloss loss less than 30 and colour change less than 2.0 ΔE) and minimum 70 micron DFT. This coat shall be applied in shop after an interval of minimum 10 hours and within six (6) months (from the completion of Intermediate coat), Colour and shade of the coat shall be as approved by the Employer.	
62.	VI/B	IV-D	3.14.09 (iii)	15 of 69	All steel parts embedded in concrete like Strake embedment assembly including bolts, nuts, washers, pipe sleeves and insert plate shall be galvanized as per IS:4736. The minimum weight for galvanizing shall be 610 g/sq.m and shall comply with relevant IS Codes.	All steel parts embedded in concrete like bolts, nuts, washers, pipe sleeves and insert plate shall be galvanized as per IS:4736. The minimum weight for galvanizing shall be 610 g/sq.m and shall comply with relevant IS Codes.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.		
63.	VI/PA RT-A	II-A1 II-A2 II-A3 II-A4 II-A5 II-A6 II-A7 II-A8 II-A9 II-A10 II-A11	-	General Layout Plan 1. Kudgi (3x800 MW) 9573-999-POC-F-001 Rev.7 2. Lara (2x800 MW) 9548-999-POM-F-001 Rev.8 3. Gadarwara (2x800 MW) 9572-999-POC-F-001 Rev.6 4. Darlipali (2x800 MW) 9549-999-POC-F-001 Rev.10 5. Mouda (2x660 MW) 9561/9575-999-POC-F-001 Rev.11 6. Solapur (2x660 MW) 9571-999-POC-F-001 Rev.5 7. Tanda (2x660 MW) 9562-999-POC-F-002 Rev.9 8. Nabinagar JV (3x660 MW) 0370-999-POC-F-001 Rev.10	General Layout Plan 1. Kudgi (3x800 MW) 9573-999-POC-F-001 Rev.8 (Civil Annex 6) 2. Lara (2x800 MW) 9548-999-POM-F-001 Rev.9 (Civil Annex 7) 3. Gadarwara (2x800 MW) 9572-999-POC-F-001 Rev.7 (Civil Annex 8) 4. Darlipali (2x800 MW) 9549-999-POC-F-001 Rev.11 (Civil Annex 9) 5. Mouda (2x660 MW) 9561/9575-999-POC-F-001 Rev.12 (Civil Annex 10) 6. Solapur (2x660 MW) 9571-999-POC-F-001 Rev.6 (Civil Annex 11) 7. Tanda (2x660 MW)
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					Page 25 of 60

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					9. Meja (2x660 MW) 0360/0361-999-POC-F-001 Rev.7 10. Barh (3x660 MW) 9558/9560-999-POC-F-001 Rev.8 11. Nabinagar (4x250MW) 0270-999-POC-F-001 Rev. 8	9562-999-POC-F-002 Rev.10 (Civil Annex 12) 8. Nabinagar JV (3x660 MW) 0370-999-PO-F-001 Rev.11 (Civil Annex 13) 9. Meja (2x660 MW) 0360/0361-999-POC-F-001 Rev.8 (Civil Annex 14) 10. Barh (3x660 MW) 9558/9560-999-POC-F-001 Rev.9 (Civil Annex 15) 11. Nabinagar (4x250MW) 0270-999-POC-F-001 Rev. 9 (Civil Annex 16)
64.	VII/A	II-A10	List of Drawings	30 of 30	-	Include the following new drawings enclosed herewith this Amendment at Sl. No. 6 & 7 respectively. 6. General Arrangement of Twin flue Chimney for Units1&2 (2x660 MW) – Drg. No. 9558-317-POC-A-001(Civil Annex 17)

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						7. General Arrangement of Single flue Chimney for Unit3 (1x660 MW) – Drg. No. 9558-317-POC-A-002(Civil Annex 18)
65.				New Clause		Bidder shall utilize the area identified for FGD purpose. The area identified for FGD purpose in GLP shall be levelled and free from obstructions like sheds, trees etc. However, site clearance like removal of bushes, vegetation etc. is in Bidder's scope.
66.				New Clause		Dismantling & Removal of asbestos sheet shall be done by owner. However, site clearance like removal of bushes, vegetation etc. is in Bidder's scope.
67.	SECTION-VI/ Part-A	V SALIEN T DESIG N DATA	7.03.00	13 of 26	DESIGN PHILOSOPHY – Ventilation System Note : Dry bulb temperature during summer season mentioned in clause V, 7.01.00 (Appendix-A) Sub- section V, Part-A shall be considered as Design Ambient Temperature for above.	DESIGN PHILOSOPHY – Ventilation System Note : Dry bulb temperature during summer season mentioned in clause V, 7.01.00 (Appendix-A) Sub- section V, Part-A shall be considered as Design Ambient Temperature for above.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
68.	SECTI ON-VI/ Part-A	V SALIEN T DESIG N DATA	7.01.00	12 of 26	For areas, where A/C load is of the order of 25-60 TR, Direct Expansion (DX) type Condensing unit (with AHU) shall be provided depending on the availability of space/ layout etc. For areas, where A/C load is of the order of 15-25TR, ductable split/package A/C shall be provided. Smaller areas which are away from the D-X type Condensing unit /central chilling units which may require air conditioning upto 15 TR rating shall be served with Hi-wall Split/Cassette air conditioner units as per requirement.	For areas like FGD control room where load is more than 15TR ,Direct expansion (D-X) type condensing unit (with AHU) shall be provided. For other areas where air conditioning requirement is 5-15 ductable split/package A/C shall be provided. If the air conditioning load is less than 5TR, then Hi-wall Split/Cassette air conditioner shall be provided.
69.	SECTI ON-VI/ Part-A	III-A2	3.00.00(i)	3 of 4	Complete compressed air and piping network for service air and instrument air application in FGD and ZLD system (if provided).	Complete compressed air and piping network for service air and instrument air application in FGD and ZLD system (if provided) shall be as per Tender drawing of compressed air system. (Mech Annexure I)
70.	VI/B	I-M4	5.02.00(b)	Page 2 of 18	Linear heat sensing cable detection system Gypsum and lime conveyor of FGD system and Cable Galleries covered under MVW Spray System.	Linear heat sensing cable detection system Gypsum and lime conveyor of FGD system and Cable Galleries.
71.	VI/B	I-M4	5.02.00(c)	Page 2 of 18	Quartzoid bulb heat detection system Equipments protected by HWV spray system, conveyors protected by MVW spray system.	Quartzoid bulb heat detection system Equipments protected by HWV spray system.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
72.	SECTION-VI/ Part-E	Tender Drawin g List	1.00.00 (A)	1 of 2	--	Schematic drawing of compressed air system
73.	VI/B	I-M4 Fire Detection & Protection System	5.15.00Notes: (3)	Page 13 of 18	Over and above, contractor may note that short term fire proof cables shall be provided for coal handling plant and inert gas protected areas. Short term fire proof cables shall be Mineral insulated copper conductor and copper sheathed type satisfying requirements of Fire resistance, safety in the industrial application areas mentioned in the specification and also, shall be approved by UL standards and certified by LPCB. The contractor shall provide all the cables so as to complete the system.	Over and above, contractor shall provide all the cables so as to complete the system.
74.	VI/A	III-A2	2.00.00 (C)	2 of 4	Miscellaneous areas: All other areas like Limestone Grinding system building, Gypsum dewatering building, Recirculation pump & Oxidation Blower/compressor building etc & all other non-air conditioned areas covered under this package shall be ventilated by a combination of supply/exhaust fans and fresh air in-take / back draft louvers. For ventilation of Battery rooms and Oil rooms, fans with flame proof motor shall be used. Further, toilets shall be provided with propeller type exhaust air fans.	Miscellaneous areas: All other areas like Limestone Grinding system building, Gypsum dewatering building etc & all other non-air conditioned areas covered under this package shall be ventilated by a combination of supply/exhaust fans and fresh air in-take / back draft louvers. For ventilation of Battery rooms and Oil rooms, fans with flame proof motor shall be used. Further, toilets shall be provided with propeller type exhaust air fans. Note: The above list of Buildings is indicative only. Any Building under this

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						package which are of enclosed type, shall be provided by Mechanical ventilation.
75.	VI/B	I-M4	5.05.00	5 of 18	The detection zone/loop divisions of LHSC system shall match with MVW spray zones. Conveyors where LHSC shall be installed shall be divided into no. of various zones whereas conveyor for which IR detector is installed shall be considered as one zone.	The clause stands deleted
76.	VI/B	I-M4	5.16.00	13 of 18	Upon detection of fire either by QB detector or LHSC detector, the spray system shall be initiated. It shall also initiate spray system for the two adjacent zones after a time delay settable at site.	The clause stands deleted
77.	VI/B	I-M4	5.05.00	5 of 18	Mounting arrangement have been indicated in tender drawing.	Mounting arrangement will be provided as per proven practice.
78.	SECT I ON-VI/ Part-A	III-A2	3.00.00(g)	3 of 4	Monorail with Chain pulley block of minimum 2 tons or 125% of heaviest parts of equipment to be lifted whichever is more.	Monorail with electric hoist of minimum 2 tons or 125% of heaviest parts of equipment to be lifted whichever is more.
79.	A	III-A6 Zero Liquid Discharge System			Chapter 'Zero Liquid Discharge System'	Chapter 'deleted'.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
80.	A	VI	143 of 209	4.02.00 xvii)	Waste Water Treatment System (Applicable for Barh-I..... filter test.	Deleted.
81.	A	VII	16-18 of 61	1.20.00	SPARES FOR FGD Waste Water Treatment (FGD WWT) SYSTEM FOR ZLD(APPLICABLE FOR PROJECTS WHERE ZLD SYSTEM IS BEING PROVIDED)	Deleted.
82.	B	I-M7 Zero Liquid Discharge System			Chapter 'Zero Liquid Discharge System'	Chapter 'deleted'.
83.	E				Process Flow diagram for FGD waste water treatment(FGDWWT) system for ZLD Drawing No. 0011-109-POM-A-005 (Sht. 1 of 3, Sht.2 of 3 & Sht. 3 of 3)	Deleted.
84.	A	I Intent of Specification	15 of 19	4.04.00,	FGD WASTE WATER REATMENT SYSTEM FOR ZERO LIQUID DISCHARGE (ZLD)..... for each project.	Deleted
85.	A	I Intent of Specification	16 of 19	4.05.00	Provenness criteria for critical equipment, auxiliaries, systems and bought out items for FGD waste...../Anthracite coal/lignite.	Deleted

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
86.	A	I Intent of Specific ation	3 of 19	1.03.05	ZERO LIQUID DISCHARGE (ZLD) SYSTEM for FGD waste water for Barh-I.....	Deleted.
87.	A	I Intent of Specific ation	5 of 19	3.00.00 A(5)	Process Flow Diagram for FGD Waste water treatment (FGD WWT).....	Deleted.
88.	Attach mewnt -12 to Section n VII	Part-F, Chapter -II, Sub Section :DM1	5 of 42	1.02.00 (xxviii)	Write up on ZLD...	Deleted
89.	Attach mewnt -12 to Section n VII	Part-F, Chapter -II, Sub Section :DM2			Zero Liquid	Sub Section:DM2 'deleted'
90.	VI/A	III-A4	1	1.01.00(i)	Piping for normal -----, piping for emergency -----pump, other piping, fittings, specialties -----and electrical equipment as required and as specified for the system.	Piping for normal -----, piping for emergency -----pump, other piping, fittings, supports, valves and specialties.....and structural steel shed for housing various equipment of Equipment cooling water system alongwith necessary handling arrangement as per CI No-14.09.00, Sub-section-M1, Part-B, Section-VI and

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						electrical equipment as required and as specified for the system.
91.	V/A	IV	2 of 3	1.04.01	Contractor shall take-----DM normal Make-up----- available along C-row at CD bay rack----- meeting the makeup water requirement of ECW system. The pressure available at TP will be 4Ksc wrt FGL (approx.).	Contractor shall take-----DM normal Make-up----- available along C-row at CD bay rack----- meeting the makeup water requirement of ECW system. The quantity (maximum) and pressure available at TP will be 2 m3/hr (Maximum) and 4Ksc wrt FGL (approx.) respectively.
92.	V/A	IV	2 of 3	1.04.02	Contractor shall take-----DM emergency Make-up header ----- available along C-row at CD bay rack----- meeting the emergency makeup water requirement of ECW system. The pressure available at TP will be 4Ksc wrt FGL (approx.).	Contractor shall take-----DM emergency Make-up header ----- available along C-row at CD bay rack----- --- meeting the emergency makeup water requirement of ECW system. The quantity (Maximum) and pressure available at TP will be 2m3/hr and 4Ksc wrt FGL (approx.) respectively.
93.	V/A	IV	2 of 3	1.06.00	For Gypsum washing, contractor shall take a tap off-----rack for meeting the water requirement -----washing. The pressure available at TP will be 4 Ksc (gauge) wrt FGL (approx.).	For Gypsum washing, contractor shall take a tap off -----rack for meeting the water requirement -----washing. The water quantity and pressure available at TP will be 0.015m3/hr/MW (Maximum) & 4 Ksc (gauge) wrt FGL (approx.) respectively.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
94.	V/A	VII	61 of 61	1.28.00	-----	New Cl. 1.28.00 Added for mandatory spares of ECW system. Refer Mechanical Annexure-II
95.	Section-VI, Part A	V	2.01.01	2 of 6	Limestone will be received to power plant either through road by trucks and through Indian railway rakes. Lime stone received through Road shall be unloaded by Two (2) numbers Truck Tipplers each of minimum 40T capacity (Gross weight 60 T minimum) to discharge Feeders/ Surface Truck Unloading Hopper, complete with all mechanical, electrical and C&I, civil & structural works for unloading Limestone by truck tipplers. Two (2) numbers Box Feeders/ Bulk-material Receiving Unit/ ~~Underground~~ Truck Unloading Hopper Surface feeder, for unloading of limestone from trucks/ self-tipping trucks/ loader shovels, complete with drives, accessories all mechanical, electrical and C&I, Civil & structural works, including its supporting foundations etc. This unit shall feed limestone onto the conveyor before Limestone crusher house.	Limestone will be received to power plant through road by truck. Lime stone received through Road shall be unloaded by Two (2) numbers Truck Tipplers each of minimum 40T capacity (Gross weight 60 T minimum) to discharge Limestone on to Box Feeder/ Surface Feeder/ Truck Unloading Hopper, complete with all mechanical, electrical and C&I, civil & structural works for unloading Limestone by truck tipplers. Two (2) numbers Box Feeders/Bulk-material Receiving Unit/Surface feeder, for unloading of limestone from trucks/self-tipping trucks/loader shovels, complete with drives, accessories all mechanical, electrical and C&I, Civil & structural works, including its supporting foundations etc. This unit shall feed limestone onto the conveyor before Limestone crusher house.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAU SE NO.		
					Limestone received through Indian Railway Rakes will be unloaded in one of the side discharge Wagon Tipplers or Track Hopper of existing Coal Handling Plant (CHP). Before existing Crusher house of CHP, the unloaded limestone will be fed to new limestone crusher house through series of new conveyors/bucket elevators. All necessary modifications involving Mechanical, Electrical, C&I, Civil and Structural works in the existing CHP for taking feed to new limestone path shall be in the scope of the bidder.	
96.	Section-VI, Part A	IV TERMINAL POINT S & EXCLUSIONS	1.09.00 (i)	2 of 3	For unloading of Limestone through WT/Track Hopper of the existing Coal Handling Plant, limestone 'Feed Point' before existing CHP's Crusher House	Clause DELETED.
97.	Section-VI, Part B	I-M6 LIMES TONE HANDL ING PLANT	3.1.0	2 of 73	Unloading, Crushing and Bunker Feeding System Indian Railway rakes consisting of wagons consisting type of wagons as specified in RDSO G-33 (Rev-1) guidelines shall transport coal to the power plant. The coal received from wagons shall be unloaded in	Unloading, Crushing and Bunker Feeding System Two (2) numbers Box feeders/Bulk material receiving unit.....facilities. A mechanized system.....crusher.
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS BIDDING DOCUMENT NO.: CS-0011-109(1A)-2						AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T) Page 35 of 60

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					underground RCC hopper by means of side discharge type wagon tippler. Side discharge type wagon tipplers are to be employed for unloading IR Coal rake. Side arm chargers are envisaged for placement of wagon on the tippler table & removal of empty wagon from tippler table after tipping. Clear access shall be provided for movement of pay loader/bulldozers on the hopper grating of wagon tippler. Grating over wagon tippler hopper shall be placed and designed accordingly. Apron feeder along with dribble conveyor are employed under each wagon tippler for extracting coal from wagon tippler hoppers. Indian Railway rakes consisting of Bottom discharge wagons shall also transport coal to the power plant. The coal received from wagons shall be unloaded in underground RCC Track hopper. Paddle feeders complete with all electrical, rails, supporting structures, end stops, cable reeling drums, trailing cables, and necessary arrangement for cabling on floor of track hoppers along with accessories, shall be installed at the bottom of the Track hoppers to scoop the coal from track hoppers and feed coal on to the underground conveyors.	

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					Limestone received through railway rakes will be unloaded in one of these three side discharge wagon tipplers or track hopper. Alternatively, Two (2) numbers Box feeders/Bulk material receiving unit.....facilities. A mechanized system.....crusher.	
98.	Sectio n-VI, Part A	V	10.15.00	25 of 26	Dust extraction system Type: Venturi scrubber type Location: Truck un-loading points, Junction Towers (limestone/ gypsum discharge & receipt points), limestone crusher house (including belt feeder & vibrating screening feeder) and lime stone/gypsum storage Shed/Silo.	Dust extraction system Type: Bag Filter type Location: Truck un-loading points, Junction Towers (limestone/ gypsum discharge & receipt points), limestone crusher house (including belt feeder & vibrating screening feeder) and lime stone/gypsum storage Shed/Silo.
		Sl. No. 73 Amdt no.3 to tech spec				
99.	Sectio n-VI, Part A	VI	4.02.00	15 of 19	Guarantees Under Category-II	Guarantees Under Category-II New Clause for Guarantee for LHS & GHS added as under: (xviii) Limestone Handling System and Gypsum Handling System.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
100.	Section-VI, Part A	III-A5.	2.01.11 & sl. No. 60 of Amdt no. 3 to Tech Spec.	3 of 6	One number of covered storage shed for crushed limestone. The storage shed shall be sufficient to store limestone equivalent to consumption of minimum 7 days at Design point (Generation of all units to be considered) or 5000 MT (wherever Railway Rake unloading is envisaged) whichever is higher. A reclaim hopper shall be provided below the limestone storage shed for the entire length of the stockpile. Alternatively, suitable number of Limestone Storage Silos to store limestone equivalent to consumption of minimum 7 days at Design point or 5000 MT (wherever Railway Rake unloading is envisaged) whichever is higher. Suitable number of Belt feeders below silos shall be provided taking feed from silo and discharging onto onward conveyors/ Bucket elevators. The Bidder shall demonstrate the rated capacities of each conveying stream and the associated equipments for Limestone Handling system and Gypsum Handling System. One number of covered storage shed/silo for crushed limestone. The storage shed shall be sufficient to store limestone equivalent to consumption of minimum 7 days at Design point (Generation of all units to be considered). A reclaim hopper shall be provided below the limestone storage shed for the entire length of the stockpile. Alternatively, suitable number of Limestone Storage Silos to store limestone equivalent to consumption of minimum 7 days at Design point. Suitable number of Belt feeders along with suitable crushed limestone feed regulating mechanism below silos shall be provided taking feed from silo and discharging onto onward conveyors/ Bucket elevators. The Maximum capacity of each Limestone storage Silo shall not exceed 2000 MT.	

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
101.	Section-VI, Part A	III-A5	2.01.10	3 of 6	Suitable number of motorized travelling tripper / flow diverter plough (as applicable) on each feeding conveyor for feeding the crushed limestone to the covered storage shed . Trippers shall be complete with all mechanical, electrical equipment, rails, chute work, rail supporting structure (along with structural stools, as required), cables with cable festooning arrangement, thruster brakes, rail clamps, electric hoist, actuator flap gates etc.	Suitable number of motorized travelling tripper / flow diverter plough (as applicable) on each feeding conveyor for feeding the crushed limestone to the covered storage shed/Silo . Trippers shall be complete with all mechanical, electrical equipment, rails, chute work, rail supporting structure (along with structural stools, as required), cables with cable festooning arrangement, thruster brakes, rail clamps, electric hoist, actuator flap gates etc.
102.	Section-VI, Part B	I-M6	3.5.0	3 of 73	SYSTEM DESCRIPTION: GYPSUM HANDLING PLANT Double conveyor stream shall be provided for conveying dewatered gypsum from vacuum belt filter to over ground storage under a shed near plant boundary . The storage shed shall be sized for 7 days of gypsum production with all the units in storage shed shall be loaded to user's trucks using front-end loader/ pay loader.	SYSTEM DESCRIPTION: GYPSUM HANDLING PLANT Double conveyor stream shall be provided for conveying dewatered gypsum from gypsum vacuum belt filter to over ground storage inside a closed storage shed preferably near plant boundary . The storage shed shall be sized for 7 days of gypsum production with all the units in operation. Gypsum from storage shed shall be loaded to user's trucks using front end loader/ pay loader.
103.	Section-VI, Part B	I-M6	4.11.3 (vii)	16 of 73	Feeder carriage drive shall be suitably designed so that the forward & reverse movement of carriage can be achieved without stopping the scooping operation. Tank filled with water in DS system shall also be considered for travel	Feeder carriage drive shall be suitably designed so that the forward & reverse movement of carriage can be achieved without stopping the scooping operation.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					drive. Capacity of tank mounted on tail end side shall be sufficient for half an hour operation.	Dry type dust extraction system shall be provided.
104.	Section-VI, Part B	I-M6	4.20.00	27 of 73	---	New Clause: Crushed Lime Stone Storage Silo: The crushed lime stone storage silo shall be fabricated of minimum 10 mm thick carbon steel with a SS lining of grade SS 304 of minimum 4 mm thickness in the complete conical portion to ensure reliable discharge of material. The design of storage silos shall confirm to IS 9178 (part 1 of 3)
105.	Section -VI, Part A	III-A5	2.01.13	4 of 6	Two (2) nos. of lime sampling units, one for as received limestone in crusher house and one for as used limestone in TP before feeding to limestone bunkers, complete with all accessories and electrical, civil, structural works, supporting structures, approach/maintenance platforms, hoists etc.	One (1) nos. of lime sampling unit, for as received limestone in crusher house complete with all accessories and electrical, civil, structural works, supporting structures, approach/ maintenance platforms, hoists etc.
106.	Sl. No.-178 AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)		107 of 117		The duct to Absorber inlet thickness. The duct from Absorber outlet to bypass duct shall be made of Carbon steel of minimum 7mm thickness clad with 2 mm (minimum) thickness Alloy C276 / Alloy 59 or better material.	The duct to Absorber inlet thickness. The duct from Absorber outlet to the new wet flue chimney shall be made of Carbon steel of minimum 7mm thickness clad with 2 mm (minimum) thickness Alloy C276 / Alloy 59 / Titanium Gr-II.
107.	VII/B	I-M1	31 of 51	10.01.00	Slurry & Process Water Tanks: All the slurry tanks.....valves etc.	Slurry & Process Water Tanks:

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					Coarse- screen(s) at suction-side of these pumps shall be provided.	All the slurry tanks.....valves etc. Coarse- screen(s) at suction-side of slurry recirculation pumps shall be provided.
108.	VI/B	I-M1	34 of 51	13.03.07	All the Process water tanks (Process water Storage tanks, Clarified water tank, Emergency water storage tanks etc.) shall be designed, fabricated, erected and tested in accordance with the IS: 803, latest edition. Additional Corrosion allowance of 3mm on the minimum tank shell thickness as calculated by IS: 803, latest edition shall be provided by the Contractor. Tanks shall be made from IS: 2062 quality mild steel plates of tested quality. The tanks shall be of welded construction. Interior surface of the tanks shall lined with replaceable chlorobutyl rubber lining of minimum 4 mm thickness or with vinyl ester based flake glass lining of minimum 3 mm thickness or Epoxy lining minimum three coats of 150 micron thickness and the outside surface shall be coated with paint as approved by the Employer. The Tanks shall be provided with drain, manholes, over flow & inlet level control valves etc.	All the Process water tanks (Process water Storage tanks, Clarified water tank, Emergency water storage tanks etc.) shall be designed, fabricated, erected and tested in accordance with the IS: 803, latest edition. Additional Corrosion allowance of 1.5 mm on the minimum tank shell thickness as calculated by IS: 803, latest edition shall be provided by the Contractor. Tanks shall be made from IS: 2062 quality mild steel plates of tested quality. The tanks shall be of welded construction. Interior surface of the tanks shall lined with replaceable chlorobutyl/bromobutyl rubber lining of minimum 4 mm thickness or with vinyl ester based flake glass lining of minimum 3 mm thickness or Epoxy lining minimum three coats of 150 micron thickness and the outside surface shall be coated with paint as approved by the Employer. The Tanks shall be provided with drain, manholes, over flow & inlet level control valves etc.
109.	VII/A	III-A1	7 of 9	11.01.00	Contractor shall provide buildings for Limestone Grinding System; Slurry re-circulating pumps &	Contractor shall provide buildings for Limestone Grinding System, Compressors,

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					Oxidation blowers / Compressors; Gypsum Dewatering System & FGD control room & Analyser room (if required). The buildings must be complete in all respect specially facilitating the smooth operation and maintenance of associated equipments of above systems by providing adequate maintenance space, handling facilities, walkways, staircase etc.	Gypsum Dewatering System & FGD control room. Slurry re-circulating pumps & Oxidation blowers shall be located in a shed provided with roof sheeting. The buildings/structure must be complete in all respect specially facilitating the smooth operation and maintenance of associated equipment's of above systems by providing adequate maintenance space, handling facilities, walkways, staircase etc.
110.	VII/A	III-A1	4 of 9	4.01.11	All Slurry re-circulating slurry pumps & Oxidation blowers shall be installed inside a building to be provided by the Contractor as per specifications specified elsewhere. <i>All pumps & Oxidation blowers shall be in straight line.</i> The building must be complete in all respect specially facilitating the smooth operation and maintenance of associated equipment's of above systems by providing adequate maintenance space, handling facilities, walkways, staircase etc. The building shall be sufficiently ventilated.	All Slurry re-circulating slurry pumps & Oxidation blowers shall be installed in a shed provided with roof sheeting to be provided by the Contractor as per specifications specified elsewhere. All pumps & Oxidation blowers shall be in straight line, however, if it is not possible due to layout constraints, in such case, arrangement for handling & maintenance should be properly & optimally designed. The shed must be complete in all respect specially facilitating the smooth operation and maintenance of associated equipment's of above systems by providing adequate maintenance space, handling facilities, walkways, staircase etc.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
111.	VII/B	10 of 51	4.02.00 (iv)		Margin over pressure requirement: 44% over the calculated value	Margin over pressure requirement: Bidder shall consider the margin over pressure requirement as 44% over the calculated head value excluding the static head. Margin on Static head shall be taken as 10%. For bubbling type Absorber, Bidder shall consider choking/blockage of 10% sparger tubes while calculating the head requirements of fan.
112.	VII/B	I-M1	30 of 51	8.04.00	All the slurry pumps shall be provided with motorized suction and discharge valves. In addition, flushing water lines with motorized valves shall be shall be taken from the process water supply	All the slurry pumps shall be provided with motorized suction and discharge valves. In addition, flushing water lines with motorized/pneumatic valves shall be shall be taken from the process water supply. The process water lines shall be provided with pneumatic/motorized valves as per the proven practice of the Bidder.
113.	VII/A	III-A1	7 OF 9	7.08.00	All the storage tanks shall be lined with vinyl ester based flake glass lining from inside.	All the storage tanks shall be lined with replaceable chlorobutyl /bromobutyl rubber lining of minimum 4 mm thickness or with vinyl ester based flake

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						glass lining of minimum 3 mm thickness from inside.
114.	VI/B	I-M1	26 of 51	7.04.03	The complete frame of the filter and all parts in contact with gypsum shall be made of corrosion resistant material or shall be provided with corrosion resistant liners of proven design.	The complete frame of the filter and all parts in contact with gypsum shall be made with corrosion resistant material .
115.	VI/B	I-M1	14 of 51	5.01.00(B)	Bubbling Type Absorber (i) In case the bidder offers an absorber with gas bubbling through the slurry, the complete gas distribution system to the slurry shall be in bidder's scope. No recirculating pump and spray header and nozzles shall be required in such case. However, 2x 100% Cooling Pumps instead of Slurry Recirculation shall be provided. The spray headers & piping for cooling pump discharge shall be made of Alloy 59 or C276 and nozzles shall be made of Silicon Carbide or ceramic or equivalent having a minimum guaranteed life of 20,000 hrs. The Cooling Pumps shall be installed inside a building. The sparger minimum life of 5 years. Minimum 10% Sparger Tubes.	Bubbling Type Absorber (i) In case the bidder offers an absorber with gas bubbling through the slurry, the complete gas distribution system to the slurry shall be in bidder's scope. No recirculating pump and spray header and nozzles shall be required in such case. However, 3 x 50% Gas Cooling Pumps instead of Slurry Recirculation shall be provided. The spray headers & piping which are in contact with hot flue gas shall be made of Alloy 59 or C276 and nozzles shall be made of Silicon Carbide or ceramic or equivalent having a minimum guaranteed life of 20,000 hrs. Cooling Pump discharge piping and valves outside the flue gas path shall be in line with the requirements

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						specified for slurry recirculation pumps. The Cooling Pumps shall be installed in a shed with roof sheeting. The sparger minimum life of 5 years. Minimum 10% Sparger Tubes.
116.	VII/A	IV	1 of 3	1.02.00	Flue Gas Duct (i) Un cleaned Flue Gas For each unit: i) One tapping from the common Flue Gas Duct going towards the existing Chimney (in case of twin flue chimney). No load of duct shall be transmitted on the Employers facilities. ii) One tapping on the Employers facilities.	Flue Gas Duct (i) Un cleaned Flue Gas For each unit: i) One/two tapping (depending on layout feasibility owing to space limitations and subject to Employer's approval) from the Flue Gas Duct going towards the existing Chimney. No load of duct shall be transmitted on the Employers facilities. ii) One tapping on the Employers facilities.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
117.	VI/B	I-M1	2 OF 51	1.03.02	The FGD system shall be ... whenever the Steam Generator is in operation. However, provision shall the gas side, with the unit in operation. For this purpose. Motorized Guillotine type gates at (i) hot gas inlet to Booster Fans, (ii) Outlet of Booster Fans and (iii) in the bypass duct (common Flue Gas Duct going towards the existing Chimney). Further, Quick opening Bi-plane designing the control & logics for the FGD System.	The FGD system shall be ... whenever the Steam Generator is in operation. However, provision shall the gas side, with the unit in operation. For this purpose. Motorized Guillotine type gates has be provided at (i) hot gas inlet to Booster Fans, (ii) Outlet of Booster Fans, (ii) Outlet of Booster Fans. Further, Quick opening Bi-plane designing the control & logics for the FGD System.
118.	VI/B	I-M1	7 OF 51	3.03.01	The arrangement of the flue gas system shall at the outlet of each Booster fan. A gas tight, motor operated Guillotine gate shall be provided by the Contractor in the bypass duct (flue gas duct connecting the existing chimney).	The arrangement of the flue gas system shall at the outlet of each Booster fan.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.		
119.	Sl.no. 177 AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)		106 of 117	A "wet Chimney" shall be operation. The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11. External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet over insulation. The wet stack shall be designed as per the guidelines of EPRI Revised Wet Stack Design Guide. Alternatively, ... year full replacement guarantee and fulltime onsite QA supervision, during erection & commissioning, by the supplier of the lining of the chimney flue liner shall be wrapped with 2 mm thick Titanium / C-276 sheet. External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet. < 18 at Design Point	A "wet Chimney" shall be operation. The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11. The top flue liner above the roof slab shall be made of solid C276 / Titanium (Grade 2 as per ASME SB265) of minimum 10 mm thickness. External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet over insulation. The wet stack shall be designed as per the guidelines of EPRI Revised Wet Stack Design Guide. Alternatively, ... year full replacement guarantee and fulltime onsite QA supervision, during erection & commissioning, by the supplier of the lining system. External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet.
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS				AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Page 47 of 60
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2					

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.		
					 18 at Design Point
120.	Sl.no. 176 AMENDM ENT NO. CS-0011- 109(1A)-2- AMDT-03(T)		106 of 117	All the gates shall be designed for tight shut off. The Guillotine gate type dampers mentioned at condition without the use of seal air fans of the damper. The Guillotine gates shall also be provided with a 2X100% complete seal air system. The bypass damper shall minimum one type of damper of each type and size.	All the gates shall be designed for tight shut off. The Guillotine gate type dampers mentioned at condition without the use of seal air fans of the damper. The motor operated Guillotine gates shall also be provided with a 2X100% complete seal air system. The bypass damper shall minimum one type of damper of each type and size.
121.	Sl.no.05 AMENDM ENT NO. CS-0011- 109(1A)-2- AMDT-04(T)			Waste Water The Contractor guarantees that the maximum purge flow rate to waste water treatment system for Barh-I (3X660 MW) shall be 30 m ³ /hr averaged over a 24 hour period and for Nabinagar (4x250 MW) shall be 20 m ³ /hr averaged over a 24 hour period.	Waste Water The Contractor guarantees that the maximum purge flow rate to waste water treatment system shall be 10m³/hr (except for BRBCL where it shall be less than 5 m³/hr) averaged over a 24 hour period from each unit.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
122.	Sl.no. 144 AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)		94 of 117		Clean gas from the absorber shall be taken to the Wet Chimney, to be provided by the Contractor, through three stage mist eliminators. Provision shall be made for facilitating operation of unit with FGD bypass through existing stack. All modifications required including providing bypass damper & Gate is included in the scope of the Contractor.	Clean gas from the absorber shall be taken to the Wet Chimney, to be provided by the Contractor, through three stage mist eliminators. Provision shall be made for facilitating operation of unit with FGD bypass through existing stack. All modifications required including providing bypass damper is included in the scope of the Contractor.
123.	V/I/B	I-M1	14 of 51	5.01.00 A (iv)	(iv) The slurry recirculation pumps shall have motor driven knife gate valve at pump suction and discharge side.	(iv) The slurry recirculation pumps shall have motor driven knife gate valve at pump suction and discharge side. In order to optimise power consumption of FGD system at part load operation, Bidder to provide atleast one slurry recirculation pump preferably lower level with Variable Frequency Drive (VFD).
124.	V/I/B	I-M1	31 of 51	10.01.00	The tanks shall be of welded construction. Interior surface of the tanks shall be lined with replaceable chlorobutyl/bromobutyl rubber lining of minimum 5 mm thickness and the outside surface shall be coated with paint as approved by the Employer	The tanks shall be of welded construction. Interior surface of the tanks shall be lined with the following: - Wastewater tank , Filtrate tank, Secondary hydro cyclone feed tank : Vinyl ester based Flake lining of min 3 mm thickness

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						Slurry tanks : Replaceable chlorobutyl /bromobutyl Rubber lining of minimum 4 mm thickness The outside surface of the tanks shall be coated with paint as approved by the Employer. Slurry pipes shall be designed to keep the velocity above the settling velocity under all operating conditions. The contractor may provide a recirculation line with motorized isolation valve / restriction orifice made of erosion resistant material for the above purpose.
125.	V/B	I-M1	33 of 51	12.01.00	Slurry pipes shall be designed to keep the velocity above the settling velocity under all operating conditions. The contractor may provide a recirculation line with motorized isolation valve for the above purpose.	
126.	V/B	III-C7	2 of 5	2.09.00	Flanged valves shall be rated at no less than ANSI press class of 300 lbs.	Flanged valves shall be rated at no less than ANSI press class of 150 lbs.
127.	V/B	-I-M9	15 of 24	MDL 387 388	GA Drawing & Datasheet of 12T Hoist for Ball Mill Building GA & Datasheet of 25T Hoist	GA Drawing & Datasheet of Hoist for Ball Mill Building GA & Datasheet of Hoist
128.	VI	I-M1	19 of 51	5.06.18	In case the absorber is equipped with several spray levels they shall be designed as follows: (i) The last spray level upstream the mist eliminator shall be operated only in counter flow. (ii) (iii) (iv)	In case the absorber is equipped with several spray levels they shall be designed as follows: (i) For spray type Absorber, the last spray level upstream the mist eliminator shall be operated only in counter flow. (ii) (iii)

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						(iv)
129.	VI	I-M1	8 of 51	4.01.01 3(iii)	Pressure at Booster Fan suction	Pressure at terminal point before Booster Fan suction 0 mmWc
130.	VI/B	I-M1	27 of 51	7.07.05	The secondary wastewater underflow shall be taken to the adequately sized filtrate tank, while the overflow shall be taken to a wastewater tank.	The secondary wastewater underflow shall be taken to the adequately sized filtrate tank while the overflow shall be taken to a wastewater tank. In case Bidder opts to provide additionally Lamella separator before the waste water tank and after the secondary hydro cyclone for removing impurities from the system, the solids concentration in waste water up to max 10% can be acceptable .However, the required moisture content in Gypsum & required Gypsum quality shall be complied.
131.					ZLD envisaged for Barh (3x660 MW) & BRBCL (4x250MW)	ZLD stands deleted for both these projects (Barh-I (3x660 MW) & BRBCL (4x250MW)). Accordingly, all clauses and Drgs indicated in the specification pertaining to ZLD will not be applicable and clauses and drgs indicated in the

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
132.	VII/A	IV	2 of 3	1.08.00	Waste Water FGD waste water pipes shall terminate along with isolation valve at 5 Meters near HCSD Mixing Tank , and 300 mm above FFL in HCSD Silo Area. Pressure at terminal point shall be 3.0 kg/cm2(g) , pH shall be 7.0 (approx.) and temperature shall be <50°C. Waste Water FGD waste water pipes shall terminate along with isolation valve at 5 Meters near HCSD Mixing Tank , and 300 mm above FFL in HCSD Silo Area. Pressure at terminal point shall be 3.0 kg/cm2(g) , pH shall be 7.0 (approx.) and temperature shall be <50-60°C. For (Barh-I (3x660 MW) & BRBCL (4x250MW)):- FGD waste water pipes shall terminate along with isolation valve ash slurry sump. PH shall be 7.0 (approx.) and temperature shall be <50-60°C at terminal point.	specification related Wastewater treatment system shall be applicable to these two projects also.
133.	VII/A	VII	1 of 61	1.01.00 a)	The list of mandatory spares considered essential by the Employer is indicated in the list enclosed to this Sub-Section. The bidder shall indicate the prices for each and every item (except for items not applicable to the bidders design) in the 'Schedule of Mandatory Spares' whether or not he Employer to have such spares. If the bidder fails to comply with the above or fails to quote the price of any spare item, the cost of such spares	The list of mandatory spares considered essential by the Employer is indicated in the list enclosed to this Sub-Section. The bidder shall indicate the prices for each and every item (except for items not applicable to the bidders design) in the 'Schedule of Mandatory Spares' whether or not he considers it necessary for the Employer to have such spares. If the bidder fails to comply with the above or fails to quote the
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS BIDDING DOCUMENT NO.: CS-0011-109(1A)-2						AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T) Page 52 of 60

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					shall be deemed to be included in the contract price. The bidder shall furnish the population per unit of each item in the Bid Forms & Price Schedules. Whenever the quantity is mentioned in "sets" the bidder has to give the item details and prices of each item.	price of any spare item, the cost of such spares shall be deemed to be included in the contract price. The bidder shall furnish total population of each item for the project in the Bid Forms & Price Schedules. Whenever the quantity is mentioned in "sets" the bidder has to give the item details and prices of each item.
134.	VII/A	VII	6-11 of 61	1.01.00-1.17.00	Mandatory Spares List (For each Project) Cl. No. 1.01.00 to 1.17.00	Mandatory Spares List (For each Project) - Cl. No. 1.01.00 to 1.17.00 revised attached as Mech Annexure III
135.	VII/A	VII	44 of 61	Note to cl. No. 1.24.00	Note	Add below Note:- 6. Wherever rubber part viz: coupling, V belt, flexible hose etc have been used ,minimum quantity as specified above is to be supplied and any item which is not covered above minimum 10% or 01 no whichever is higher is to be supplied. 7. Wherever nonmetallic fabric/paper filter etc have been used ,minimum quantity as specified above is to be supplied and any item which is not covered above minimum 10% or 01 no whichever is higher is to be supplied 8. Any special tool required for maintenance of any of the equipment being supplied is to be included in

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
						mandatory T&P along with the equipment.
136.	Section-VI, Part A	VI	5.00.00	20-23 of 24	AUXILIARY POWER CONSUMPTION(PA) FOR EACH PROJECT	Revised AUXILIARY POWER CONSUMPTION (PA) FOR EACH PROJECT is enclosed at Mech Annexure-IV
137.					--	In case distance from Limestone Grinding system/ Gypsum Dewatering and Absorber is more than 500M, Bidder shall provide the following :- Flushing system at intermittent locations for the lime stone slurry pipeline which shall contain tank and pumps. Intermittent location distance of flushing system shall be based on their proven practice.
138.	VI/B	I:M9	1 to 24 of 24	MDL List	MDL List no. 213.Motor for Booster Fan - Sub QR documents of M/s Crompton Greaves Ltd., Bhopal 214. Motor for Booster Fan - Sub QR documents of M/s Weg, Hosur 215. Motor for Booster Fan - Sub QR documents of M/s Crompton Greaves Ltd., Mandideep 433. Oxidation Blower - Sub QR documents of M/s ITO, Japan 434.Wet Limestone Grinding Mills (Ball Mills) - Sub QR documents of M/s Thysencrupp, Germany	MDL List no. 213.Motor for Booster Fan - Sub QR documents 214. Motor for Booster Fan - Sub QR documents 215. Motor for Booster Fan - Sub QR documents 433. Oxidation Blower - Sub QR documents 434.Wet Limestone Grinding Mills (Ball Mills) - Sub QR documents 435.Recirculation Slurry Pump - Sub QR documents 436.Booster Fan - Sub QR documents

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.	
				435.Recirculation Slurry Pump - Sub QR documents of M/s DUCHTING PUMPEN, GERMANY 436.Booster Fan - Sub QR documents of M/s Solyvent Flakt AB, Sweden 437.Slurry Pump - Sub QR documents of M/s Duchting Pumpen, Germany 438.Wet Limestone Grinding Mills (Ball Mills) - Sub QR documents of M/s Metso, USA 439.Agitators - Sub QR documents of M/s EKATO RMT GMBH. Germany 440.Vaccume Belt Filters -Sub QR documents of M/s Shanghai Xuhe Environmental Technology Co. Ltd., Shanghai, China 441.Vaccume Belt Filters -Sub QR documents of M/s FLSmith, USA 442.Agitators - Sub QR documents of M/s Zhejiang Greatwall Reducer Mfg Co. Ltd. 443.Gas to Gas Heat Exchanger (GGH) - Sub QR documents 444.Slurry Pump - Sub QR documents of M/s Weir Minerals, USA 445.Slurry Pump - Sub QR documents of M/s Sam Turbo Industries Pvt. Ltd., Koimbatoor 446.Booster Fan - Sub QR documents of M/s Suewon Poongryuk Machinery Co. Ltd, Korea 447.Wet Limestone Grinding Mills (Ball Mills) - Sub QR documents of M/s Cemtec, Austria	437.Slurry Pump - Sub QR documents 438.Wet Limestone Grinding Mills (Ball Mills) - Sub QR documents 439.Agitators - Sub QR documents 440.Vaccume Belt Filters - Sub QR documents 441.Vaccume Belt Filters - Sub QR documents 442.Agitators - Sub QR documents 443.Not used 444.Slurry Pump - Sub QR documents 445.Slurry Pump - Sub QR documents 446.Booster Fan - Sub QR documents 447.Wet Limestone Grinding Mills (Ball Mills) - Sub QR documents of M/s Cemtec, Austria 448.Wet Limestone Grinding Mills (Ball Mills) - Sub QR documents of M/s Christian Pfeiffer Maschinenfabrik, Austria 449. Oxidation Air Blower - Sub QR documents of m/s Siemens Turbo Machinery / HV Turbo 602. MQP for PDB of M/s pyrotech Electronics Udaipur 628. MQP for foundation bolts M/s Quality Engineering Works, Kolkata 629. MQP for foundation bolts M/s Indiana Conveyors, Jejuri 671. MQP for Ball Valve (M/s Leader) -All drgs pertaining to GGH stands deleted

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					448. Wet Limestone Grinding Mills (Ball Mills) - Sub QR documents of M/s Christian Pfeiffer Maschinenfabrik Austria 449. Oxidation Air Blower - Sub QR documents of m/s Siemens Turbo Machinery / HV Turbo 602. MQP for PDB of M/s pyrotech Electronics Udaipur 628. MQP for foundation bolts M/s Quality Engineering Works, Kolkata 629. MQP for foundation bolts M/s Indiana Conveyors, Jejuri 671. MQP for Ball Valve (M/s Leader) -All drgs pertaining to GGH	
139.	V/A	A -10	14 of 24		Drawing not attached	The drawing for Equipment layout at EL 0.0M (Drg. no. 9558-999-POM-A-001) for Barh-1 project is attached as Mechanical Annexure V
140.					Barh-I (3X660MW) clauses and drgs indicated considering that FGD outlet will led to New Chimney.	Barh-I (3X660MW) clauses and drgs revised considering that FGD outlet will led to existing chimney and accordingly absorber discharge will be connected to ID fan discharge duct with additional damper(s). Bypass duct from bypass damper to chimney and existing chimney shall be lined. Further, Condensate

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
141.	VII/A	I	9 of 19	4.01.07	In case the Bidder or the proposed sub-vendor is a manufacturer of Slurry Pumps who meets the requirements stipulated at clause 4.01.01 (e) above, the Bidder or the proposed sub-vendor can also manufacture Slurry Recirculation Pumps and slurry pumps, provided it has collaboration or valid licensing agreement for design, engineering, manufacturing, supply of such equipment in India with such manufacturer who meet the requirements stipulated at clause 4.01.01 (e) above for the Slurry Recirculation Pumps. Before ---- equipment.	draining system and condensate study shall also be in the bidder's scope. Sketch and details are enclosed at Mechanical Annexure-VI.
142.	VII/A	V	10 of 26	Notes for clause no. 6.000	Notes:- 3.For the purpose of sizing of equipments and guarantee, MgCO ₃ shall be considered as unreactive dolomitic form.	Following note is added. Note:- 3.For the purpose of sizing of equipments and guarantee, MgCO₃ shall be considered as unreactive dolomitic form.
142 (a)	VII/B	I-M1	8 of 51	4.01.00	The Booster -----specified range of fuels. Additionally a pressure loss of 100 mm wcl (excluding margin) shall be built up in booster fan design criteria as mentioned below to take care of pressure loss due to future installation of De-NO _x system.	The Booster -----specified range of fuels. Additionally a pressure loss of 100 mm wcl (including margin) shall be built up in both booster fan design criteria as mentioned below to take care of pressure loss due to future installation of De-NO _x system.

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
					De-Nox system.	
142 (b)	VII/A	III-A1	9 of 9	25.00.05	A common Nickel based alloy material storage/neutralizing tank for the both the units of storage capacity of 12 hrs of stack condensate of both the stack shall be provided. Storage tank/neutralization tank shall be complete with dosing, mixing and preparation system. After neutralization of the stack condensate collection, same shall be pumped to common drain system. Contractor shall provide 2 X100% pumps, complete with valves, piping fittings, level control/monitoring etc. Alternatively, bidder may propose its proven system for disposal of the condensate system in its bid for Employer's consideration. All the material in contact with the condensate shall be of suitable material for the operating duty. Bidder should provide the condensate collection system such that the condensate collected shall be routed to absorber by gravity, bidder should ensure safe discharge to the absorber. However, in-case of the distance between absorber and wet stack is considerably far, bidder should provide the condensate collection system such that condensate shall be collected in a storage tank and pumped to absorber. Tank shall be placed at zero meter with a capacity 5 m3/hr along with associated pumping system. A common storage tank for the both the units of storage capacity of 5 m3/hr of stack condensate of both the stack shall be provided. Storage tank shall be complete with stack condensate collection be pumped to absorber. Contractor shall provide 2 X100% pumps, complete with valves, piping fittings, level control/monitoring etc. Alternatively, bidder may propose its proven system for disposal of the condensate system in its bid for Employer's consideration. All the material in	
FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS					AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Page 58 of 60
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2						

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE			EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.		
					contact with the condensate shall be of suitable material for the operating duty.
142 (c)	Sl. No.-165 AMENDMENT NO. CS-0011-109(1A)-2-AMDT-03(T)		101 of 117		2x100% electric driven, single stage, integrally geared, single or dual vane centrifugal type / positive displacement (Helical lobe) type with VFD drive , oxidation blowers complete with integral gearbox, lube oil system, instrumentation and accessories. The blower will be used for supplying a variable volume of air to the absorber reaction tank.
143.	SECTI ON-VI, PART-B	I-M1	33 OF 51	12.02.00	All the pipes handling slurry shall be provided with replaceable rubber lining of proven quality. The Contractor can provide slurry pipes of size lower than 300 NB made up of FRP material (silicon carbide coating on slurry exposed surface) if it has previous experience of providing the same. Outer surface of the pipes should be fire retardant.
144.	VI/B	I-M1	19 of 51	5.06.11 & Refer the Sl.No.178 of Amendme nt No. CS-0011-	The absorber vessel shall be made of minimum 7 mm thick carbon steel. The absorber oxidation tank, absorber tower & absorber outlet duct up to absorber outlet flange shall be provided with 2 mm (minimum) thickness lining / cladding / Alloy C276 / Alloy 59 or better material.

FLUE GAS DESULPHURISATION (FGD)SYSTEM PACKAGE FOR LOT 1A PROJECTS	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Page 59 of 60

BIDDING DOCUMENT NO.: CS-0011-109(1A)-2

AMENDMENT NO. 5 TO TECHNICAL SPECIFICATION (SECTION VI)

SL. NO.	SPECIFICATION REFERENCE				EXISTING	READ AS
	SEC/ PART	SUB SEC.	PAGE NO.	CLAUSE NO.		
145.	VII/B	I-M1	17.01.00	109(1A)-2-AMDT-03(T) 42 of 51	Thermal Insulation along with aluminum cladding shall be provided for all the equipments/surfaces having skin temperature more than 60 degree Celsius.	Thermal Insulation along with aluminum cladding shall be provided for all the equipments/surfaces having skin temperature more than 60 degree Celsius except for absorber. Further, Thermal insulation of min 70 mm shall be provided for absorber outlet flue gas duct irrespective of skin temperature.

NEW NABINAGAR STPP

SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT

The various site specific seismic parameters for the project site shall be as follows:

1)	Peak ground horizontal acceleration (MCE)	: 0.16g
2)	Multiplying factor to be applied to the site specific horizontal acceleration spectral coefficients (in units of gravity acceleration 'g') to obtain the design acceleration spectra	
a)	for special moment resisting steel frames designed and detailed as per IS:800	: 0.04
b)	for special concentrically braced steel frames designed and detailed as per IS:800	: 0.03
c)	for special moment resisting RC frames designed and detailed as per IS:456 and IS:13920	: 0.024
d)	for RCC chimney	: 0.08
e)	For Liquid retaining tanks	: 0.048
f)	for Steel chimney, Absorber tower, Vessels	: 0.06
g)	for design of structures not covered under 2 (a) to 2 (f) above and under 3 below, in general (excluding special structure/ configuration/materials)	: 0.04
3)	Multiplying factor to be applied to the site specific horizontal acceleration spectral coefficients (in units of gravity acceleration 'g') for design of equipment and structures where inelastic action is not relevant or not permitted	: 0.08

Note:

1. g = Acceleration due to gravity.
2. For industrial structures, analysis for verification of mechanism shall be carried out as per IS:1893 (Part 4):2015.

SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT

The various site specific seismic parameters for the project site shall be as follows:

- 1) Peak ground horizontal acceleration (MCE) : 0.16g
- 2) Multiplying factor to be applied to the site specific horizontal acceleration spectral coefficients (in units of gravity acceleration 'g') to obtain the design acceleration spectra
 - a) for special moment resisting steel frames designed and detailed as per IS:800 : 0.04
 - b) for special concentrically braced steel frames designed and detailed as per IS:800 : 0.03
 - c) for special moment resisting RC frames designed and detailed as per IS:456 and IS:13920 : 0.024
 - d) for RCC chimney : 0.08
 - e) For Liquid retaining tanks : 0.048
 - f) for Steel chimney, Absorber tower, Vessels : 0.06
 - g) for design of structures not covered under 2 (a) to 2 (f) above and under 3 below, in general (excluding special structure/ configuration/materials) : 0.04
- 3) Multiplying factor to be applied to the site specific horizontal acceleration spectral coefficients (in units of gravity acceleration 'g') for design of equipment and structures where inelastic action is not relevant or not permitted : 0.08

Note:

1. g = Acceleration due to gravity.
2. For industrial structures, analysis for verification of mechanism shall be carried out as per IS:1893 (Part 4):2015.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects

SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
13.	PART-A	III-A5	1 OF 6	1.01.00	Based on site visit, bidder shall submit layout for Limestone handling plant & Gypsum handling facilities along with their techno-commercial bid. Bidder shall bring out all necessary modification and relocation of existing facilities, if required, along with proposed Layout submitted with the bid	We understand any modification and relocation is not in the scope of this package. Please confirm	All required modification and demolition work of existing facilities shall be in the bidder's scope. However if any relocation of existing facility is required, the same shall be done by the employer.
14.	PART-A	III-A5	2 OF 6	2.01.01	Based on site visit, bidder shall submit layout for Limestone handling plant & Gypsum handling facilities along with their techno-commercial bid. Bidder shall bring out all necessary modification and relocation of existing facilities, if required, along with proposed Layout submitted with the bid	Request customer to furnish the drawings of the existing facilities to study the modification required in the existing facility.	Bidder shall refer the GLP drawing attached with the tender documents and shall also visit the site to study existing facilities that require modification.
15.	PART-B	IV-D	23 OF 69	5.07.00	Polycarbonate sheet of 3 mm thick....	We propose to use 2 mm thick polycarbonate sheets. Please confirm.	Bidder shall comply with technical specification requirement

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
16.	PART-B	IV-D	30 OF 69	11.00.00	Fencing around lime storage/ gypsum storage area.	We do not understand the requirement of any fencing in these areas. Kindly review the requirement and confirm.	Refer Scope of work. Refer clause 2.00.00, Section-VI, Part-A of technical specification.
17.	PART-B	IV-D	8 OF 69	3.07.00	Gypsum storage shed- Gypsum storage shed shall be of RCC –framed structure with steel structure framed structure-----	Details specified for gypsum storage shed is not clear. Please furnish the detail specification for the gypsum storage shed. We propose to use space frame structure with bolted joints. Please confirm.	Bidder to refer amendment in this regard.
18.	PART-A	III-A5	3 OF 6	2.01.07	Crushed limestone reclaim hopper(RH silo)Machinery hatch---	Please furnish the detail specification for the lime stone storage shed. We propose to use space frame structure with bolted joints. Please confirm.	Bidder to refer necessary amendment in this regard.
19.	PART-A	III-A5	3 OF 6	2.01.10	Suitable no. of motorized travelling tripper /flow diverter----feeding the crushed limestone to limestone shed	We understand that intermediate supporting trestle can be provided for the supporting of tripper conveyor gallery inside lime stone shed. Please confirm.	Confirmed. However adequate space for movement of dozer/payloader shall be provided.
20.	PART-A	III-A5	60F6	3.06.00	Suitable no. of motorized travelling tripper /flow diverter	We understand that intermediate supporting trestle can be provided	Confirmed. However adequate space for movement of dozer

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
					er----feeding the gypsum to gypsum shed.	for the supporting of tripper conveyor gallery inside gypsum shed. Please confirm.	er/payloader shall be provided.
21.	PART-B	IV-D	8 OF 69	3.07.00	Gypsum storage shed- Gypsum storage shed shall be of RCC –framed structure with steel structure framed structure-----	We understand that for the gypsum stock pile area no PCC/RCC paving is required. Only leveling and grading of gypsum stockpile area is needed.	Bidder to refer amendment in this regard.
22.	PART-A	III-A5	3 OF 6	2.01.07	Crushed limestone reclaim hopper(RH silo)Machinery hatch---	We understand that no retaining wall and peripheral drain needed around lime stone stock pile and gypsum stock pile please confirm.	Bidder's understanding is not correct. Retaining wall and peripheral drain around lime stone stock pile and gypsum stock pile along with suitable entry point for dozer entry with ramp need to be provided by the successful bidder.
BARH							
23.	VI/PART-A	II-A10	1 OF 30	1.05.00	Railway siding.	We understand that work of railway siding is not in the scope of bidder. Kindly confirm our understanding is correct.	Bidders understanding is correct.
24.	VI/PART-A	II-A10	10 OF 30	7.01.00	FGL generally corresponds to RL 46.20M-----to achieve the FGL as indicated above.	Please furnish the topographical survey drawing and contour drawings of the site.	Bidder to refer amendment in this regard.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAU SE NO.			
78.	VI/B	IV-D	26 of 69	10.00.00	Site levelling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing...	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
79.	VI/B	IV-D	31 of 69	14.00.00	Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.		The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.
80.	VI/B	IV-D	41 of 69	21.00.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAU SE NO.			
81.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel super-structure with RCC floors/roof, the bidder shall necessarily use Troughed permanently colour coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering...	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).	Type of cladding system if not specified in the technical Specification shall be decided by the bidder considering the functional requirement, schedule of construction and site constraints (if any).
82.	VI/B	IV-D	25 of 69	7.00.00	Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings... All facility buildings shall be provided with 750 mm wide plinth protection all around... An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection...	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Extent and type of paving in FGD block shall be in accordance with Technical specification. However, any functional requirement of paving for FGD facilities not specifically mentioned in technical specification is also in the scope of bidder.
83.	VI/B	IV-D	25 of 69	7.00.00	The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.		

CLARIFICATION No.01 (TECHNICAL)

Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects

CIVIL-SOLAPUR

SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAU SE NO.			
87.	VI/A	III-D	2 of 4	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
88.	VI/B	IV-D	26 of 69	10.00.00	Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing...	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan

CLARIFICATION No.01 (TECHNICAL)

Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects

SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAU SE NO.			
89.	VI/B	IV-D	31 of 69	14.00	Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.		The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.
90.	VI/B	IV-D	41 of 69	21.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately
91.	VI/B	IV-D	24 of 69	7.00	In case Bidder opts for steel super-structure with RCC floors/ roof, the bidder shall necessarily use Troughed permanently colour coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering...	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).	Refer Sl. No.81

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAU SE NO.			
92.	VI/B	IV-D	25 of 69	7.00.00	Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings... All facility buildings shall be provided with 750 mm wide plinth protection all around... An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection...	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Refer Sl. No.82
93.	VI/B	IV-D	25 of 69	7.00.00	The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.		
94.	VI/A	II-A6	9 of 31	7.00.01	Geotechnical data and foundation system for the respective project are enclosed at annexure-III. The corresponding bore logs are enclosed at annexure-IV.	Annexure-IV is not available in the specification. Please provide the same.	Bidder to refer amendment in this regard.

CIVIL-MEJA

SL.	ENQUIRY SPECIFICATION	SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



NO	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
95.	VI/A	III-D	2 of 4	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
96.	VI/B	IV-D	26 of 69	10.00.00	Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing...	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
97.	VI/B	IV-D	31 of 69	14.00.00	Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.
98.	VI/B	IV-D	41 of 69	21.00.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.		The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
99.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).	Refer Sl. No. 81
100.	VI/B	IV-D	25 of 69	7.00.00	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Refer Sl.No.82
101.	VI/B	IV-D	25 of 69	7.00.00	The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.	

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



CIVIL-BARH

SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
102.	VI/A	III-D	2 of 4	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing. Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing...	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
103.	VI/B	IV-D	26 of 69	10.00.00		In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
104.	VI/B	IV-D	31 of 69	14.00.00		The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.
105.	VI/B	IV-D	41 of 69	21.00.00	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.
106.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel superstructure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).	Refer Sl.No.81

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
107.	VI/B	IV-D	25 of 69	7.00.00	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Refer Sl.No.82
108.	VI/B	IV-D	25 of 69	7.00.00	Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings... All facility buildings shall be provided with 750 mm wide plinth protection all around... An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection... The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.	Any suitable slope protection works can be provided. Please confirm
109.	VI/A	II-A10	10 OF 30	7.02.00	For excavation 6 metres below FGL, sheet piling shall be provided.	Excavation may be carried out by using either sheet piling/ dia-phragm wall/ secant piling/ contiguous piling or their combination. Bidder to refer amendment in this regard.
110.	General	-	-	-	Topographical survey details is not available in the specification. Please furnish the same.	Bidder to refer amendment in this regard.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



CIVIL TANDA

SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
111.	VI/A	III-D	2 of 4	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing. In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
112.	VI/B	IV-D	26 of 69	10.00.00	Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing... Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.	FGL is indicated in General Layout plan
113.	VI/B	IV-D	31 of 69	14.00.00	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL)

Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
114.	VI/B	IV-D	41 of 69	21.00.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.
115.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel super-structure with RCC floors/ roof, the bidder shall necessarily use Troughed permanently colour coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering...	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).
116.	VI/B	IV-D	25 of 69	7.00.00	Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings... All facility buildings shall be provided with 750 mm wide plinth protection all around... An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection...	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
117.	VI/B	IV-D	25 of 69	7.00.00	The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	
118.	VI/A	II-A7	22 OF 33	Annex-ure-III, e)	The minimum length of pile shall be as per approved geotechnical investigation report during detailed engineering. Please confirm.	Bidder shall comply the provisions of technical specification.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



CIVIL NPGCPL NABINAGAR

SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAUSE NO.		
121.	VI/A	III-D	2 of 4	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing. Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing...	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same. FGL is indicated in General Layout plan
122.	VI/B	IV-D	26 of 69	10.00.00	Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same. FGL is indicated in General Layout plan
123.	VI/B	IV-D	31 of 69	14.00.00	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAUSE NO.		
124.	VI/B	IV-D	41 of 69	21.00.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.
125.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel super-structure with RCC floors/roof, the bidder shall necessarily use Troughed permanently colour coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering...	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding). Refer Sl.No.81

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAUSE NO.			
126.	VI/B	IV-D	25 of 69	7.00.00	Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings... All facility buildings shall be provided with 750 mm wide plinth protection all around... An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection...	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Refer Sl.No.82
127.	VI/B	IV-D	25 of 69	7.00.00	The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.		
128.	VI/A	II-A8	9 OF 31	ANNEX-URE-B	a) The basic wind speed "Vb" at ten	Kindly specify the basic wind speed.	The basic wind speed "Vb" at 10m height above the mean ground level for "NABINAGAR-I 3X660 MW" project shall be 47 metres/second. Also refer Amendment issued separately in this regard.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAUSE NO.			
129.	VI/A	II-A8	21 OF 31	Annex-ure-III, e)	The minimum pile length for each group of piles shall be determined based on the nearest bore log. A minimum embedment of 4.0m into the very dense sand strata with SPT 'N' value greater than 40 as observed in such bore log shall be ensured, while deciding the minimum length of pile. For pile termination, SPT 'N' values shall be used from the nearby bore log data.	The minimum length of pile shall be as per approved geotechnical investigation report during detailed engineering. Please confirm.	Bidder shall comply the provisions of technical specification.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAUSE NO.			
130.	VI/A	II-A8	13 OF 31	7.02.03 xv	High Strain Dynamic Load Test may be carried out for routine load testing of working piles. However, at least two numbers of static routine vertical load tests shall be carried out on pile on which high strain dynamic load test has already been carried out for establishing the correlation between the two tests. In case of discrepancy if any between dynamic and static vertical load tests, then additional static routine vertical load tests shall be conducted as decided by the Engineer and the results of static routine vertical load shall prevail. Number of routine vertical pile load tests as per clause 7.02.03 (ix) shall be total of static routine vertical load test and high strain dynamic load tests.	High strain dynamic load test is not required as static routine load test are being carried out in the piles. Please confirm.	Bidder may conduct either static routine load test or high strain dynamic load test. Bidder to refer amendment in this regard.
131.	General	-	-	-	-	Lab test results of geotechnical investigation may please be furnished.	Bidder to refer amendment in this regard.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUB- SEC.	PAGE NO.	CLAUSE NO.			
132.	General	-	-	-	-	Topographical survey details is not available in the specification. Please furnish the same.	Bidder to refer amendment in this regard.

CLARIFICATION No.01 (TECHNICAL)

Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



CIVIL BRBCL NABINAGAR

SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
133.	VI/A	III-D	2 of 4	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
134.	VI/B	IV-D	26 of 69	10.00.00	Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing...	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
135.	VI/B	IV-D	31 of 69	14.00.00	Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
136.	VI/B	IV-D	41 of 69	21.00.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.		
137.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel super-structure with RCC floors/ roof, the bidder shall necessarily use Troughed permanently colour coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering...	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).	Refer SI.No.81

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
138.	VI/B	IV-D	25 of 69	7.00.00	Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings... All facility buildings shall be provided with 750 mm wide plinth protection all around... An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection...	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Refer SI.No.82
139.	VI/B	IV-D	25 of 69	7.00.00	The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.		
140.	VI/A	II-A11	22 OF 29	Annexure-III, e)	The minimum pile length for each group of piles shall be determined based on the nearest bore log. Pile shall be socketed into yellowish weathered sand stone. A socketing length of four (4) times the diameter of the pile into rock with rock core recovery $\geq 20\%$ shall be ensured for 600 mm & 760 mm dia piles.	The minimum length of pile shall be as per approved geotechnical investigation report during detailed engineering. Please confirm.	Bidder shall comply the provisions of technical specification.



CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects

CIVIL BRBCL (MOUDA, SOLAPUR, MEJA, BARH, TANDA, NPGCPL NABINAGAR & BRBCL NABINAGAR)

SL. NO	SEC/ PART	ENQUIRY SPECIFICATION		SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
143.		SUBSEC.	PAGE NO.	CLAUSE NO.		
144.	VI / A	V	8 OF 26	5.01.00	A "wet Chimney" shall be installed downstream of Wet Flue Gas Desulfurization (FGD) system by the Contractor...	The location of new Wet Chimney shall be near to Existing Chimney in the space provided clearing foundation interface. The design of Wet Chimney shall be done considering interface factor of existing chimney as determined by wind tunnel study. However, no design check or validation shall be done for existing chimney/structures/buildings. Kindly confirm.
						It is confirmed that no design check or validation shall be done by the bidder for existing chimney(s).

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
212.	Section-VI, PART-A	Sub-Section-VII	39 OF 61	K	Mandatory Spares of Limestone & Gypsum Handling: ELECTRIC HOISTS	ified in referred clause. In case the same has to be considered, then kindly inform about applicable list of mandatory spares to be followed. 4) Further, no spares are mentioned for chain pulley blocks. We understand that no spares shall be provided for chain pulley blocks. Please confirm.	Confirmed.
213.	VI/A	III-D	2 of 4	1.06.00	CIVIL Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
214.	VI/B	IV-D	26 of 69	10.00.00	Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing..	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
215.	VI/B	IV-D	31 of 69	14.00.00	Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
216.	VI/B	IV-D	41 of 69	21.00.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.		The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
217.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).	Refer Sl.No.81

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
218.	VI/B	IV-D	25 of 69	7.00.00	Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings... All facility buildings shall be provided with 750 mm wide plinth protection all around... An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection... The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Refer Sl.No.82
219.	VI/B	IV-D	25 of 69	7.00.00			

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
220.	VI/A	II-A4	10 of 30	7.00.01	Annexure-IV is not available in the specification. Please provide the same.	Bidder to refer amendment
221.	SEC VI / PART B	I M1	6 OF 51	3.02.07	These clauses are contradictory. Bidder understands that if 2mm thick titanium/ C276 sheet wrapping over insulation is provided then no painting is required on external surface of the chimney flue liner projecting over the chimney roof. Please confirm.	No painting is required on external surface of chimney flue liner projecting above chimney roof. Also refer Amendment in this regard.
222.	SEC VI / PART B	IV D	15 OF 69	3.14.09 (iv)	External surface of the chimney flue liner projecting over the chimney roof shall be wrapped with 2mm thick titanium/ C276 sheet over insulation., external surface of mini-shell above roof etc shall be painted with epoxy phenolic coating system having total 220 microns DFT.	

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
223.	SEC VI / PART A	V	8 OF 26	5.01.00	External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet over insulation.		
224.	SEC VI / PART A	V	8 OF 26	5.01.00	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.	Bidder understands that cladding can be done with explosion bonding or hot rolling or combination of both to achieve the required quality as per ASTM B 898-11. Please confirm.	Bidder shall provide the proposed cladding methods as per the NTPC approved fabrication procedures, tests and Quality plan such that it meets the plant operation requirements.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
225.	SEC VI / PART B	I M1	6 OF 51	3.02.07	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.		
226.	SEC VI / PART B	IV D	39 OF 69	20.00.00	Electrodes	Please provide the detail/type of electrodes to be used in welding of titanium/C276.	Type of electrode will be as per Qualified WPS. This qualified WPS needs to be submitted for NTPC approval.
227.	SEC VI / PART B	IV D	39 OF 69	20.07.00	Edge Preparation for Welding	Please provide edge preparation detail for titanium/C276 material.	Edge Preparation detail will be as per Qualified WPS. This qualified WPS needs to be submitted for NTPC approval.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
228.	SEC VI / PART A	V	8 OF 26	5.01.00	Please provide the material code to be followed for alloy C-276.	Specification requirement is clear. Bidder shall comply with the specification requirements.
				The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.		
229.	SEC VI / PART B	I M1	6 OF 51	3.02.07		
				The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.		

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
230.	SEC VI / PART A	V	8 OF 26	5.01.00	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11. Kindly furnish the following specifications for chimney liners. 1. Permissible tolerances on thickness of clad sheet and base material. 2. Permissible tolerances on flatness for clad sheet and base material. 3. Specify the quality tests which will be conducted on the clad sheet for assessing mechanical and chemical properties and on the chimney cans after fabrication. 4. Indicate any special requirements applicable for welding and fabrication of chimney at site. 5. Indicate any restriction in size of base metal and clad plate to be used for fabrication of flue cans. 6. Mention tensile and yield strength of the clad material to be achieved.	Specification requirement is clear. Bidder shall comply with the specification requirements.
231.	SEC VI / PART B	I M1	6 OF 51	3.02.07	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.	

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
232.	SEC VI / PART A	I	10 OF 19	4.02.03	For Chimney, Bidder or its agency should have in the past built at least one (1) Reinforced concrete chimney of minimum 100m height.	Bidder understands that, there is no other prequalification requirements related to fabrication and erection of titanium/c276 clad steel flue liner in chimney. Please confirm.
233.	SEC VI / PART B	IV D	2 OF 69	2.03.00	Bidder or its agency should have in the past built at least one (1) Reinforced concrete chimney of minimum 100m height.	
234.	VI / A	V	8 OF 26	5.01.00	A "wet Chimney" shall be installed downstream of Wet Flue Gas Desulfurization (FGD) system by the Contractor...	It is confirmed that no design check or validation shall be done by the bidder for existing chimney(s).

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
268.	VI/A	III-D	2 of 4	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
269.	VI/B	IV-D	26 of 69	10.00.00	Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing...	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
270.	VI/B	IV-D	31 of 69	14.00.00	Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
271.	VI/B	IV-D	41 of 69	21.00.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.		The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.
272.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel super-structure with RCC floors/ roof, the bidder shall necessarily use Troughed permanently colored coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering...	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).	Refer SI.No.81

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
273.	VI/B	IV-D	25 of 69	7.00.00	Passages shall be provided inside the FGD block connecting to the outer periphery road to have access to the various facilities/buildings... All facility buildings shall be provided with 750 mm wide plinth protection all around... An area of minimum 5 m width all around the tank foundations and other facility buildings shall be paved. This paving shall be beyond the extent of plinth protection...	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Refer SI.No.82
274.	VI/B	IV-D	25 of 69	7.00.00	The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.		

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
275.	VI/A	II-A3	22 OF 31	Annexure-IV, e)	The minimum pile length for each group of piles shall be determined based on the nearest bore log. A minimum embedment of 2.0m into pebbles/cobbles/boulder strata (river Bed material) as observed in such bore log shall be ensured, while deciding the minimum length of pile. For pile termination, SPT 'N' values shall be used from the nearby bore log data.	The minimum length of pile shall be as per approved geotechnical investigation report during detailed engineering. Please confirm.	Bidder shall comply the provisions of technical specification.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
276.	VI/A	II-A3	14 OF 31	7.02.03 xv	High Strain Dynamic Load Test may be carried out for routine load testing of working piles. However, at least two numbers of static routine vertical load tests shall be carried out on pile on which high strain dynamic load test has already been carried out for establishing the correlation between the two tests. In case of discrepancy if any between dynamic and static vertical load tests, then additional static routine vertical load tests shall be conducted as decided by the Engineer and the results of static routine vertical load shall prevail. Number of routine vertical pile load tests as per clause 7.02.03 (ix) shall be total of static routine vertical load test and high strain dynamic load tests.	High strain dynamic load test is not required as static routine load test are being carried out in the piles. Please confirm.	Bidder may conduct either static routine load test or high strain dynamic load test. Refer amendment .

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
277.	General	-	-	-	-	Lab test results of geotechnical investigation may please be furnished.	Bidder to refer amendment.
278.	SEC VI / PART B	I M1	6 OF 51	3.02.07	External surface of the chimney flue liner projecting over the chimney roof shall be wrapped with 2mm thick titanium/ C276 sheet over insulation.	These clauses are contradictory. Bidder understands that if 2mm thick titanium/ C276 sheet wrapping over insulation is provided then no painting is required on external surface of the chimney flue liner projecting over the chimney roof. Please confirm.	No painting is required on external surface of chimney flue liner projecting above chimney roof. Also refer Amendment in this regard.
279.	SEC VI / PART B	IV D	15 OF 69	3.14.09 (iv)	, external surface of mini-shell above roof etc shall be painted with epoxy phenolic coating system having total 220 microns DFT.		
280.	SEC VI / PART A	V	8 OF 26	5.01.00	External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet over insulation.		

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
281.	SEC VI / PART A	V	8 OF 26	5.01.00	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.	Bidder understands that cladding can be done with explosion bonding or hot rolling or combination of both to achieve the required quality as per ASTM B 898-11. Please confirm.	Bidder shall provide the proposed cladding methods as per the NTPC approved fabrication procedures, tests and Quality plan such that it meets the plant operation requirements.
282.	SEC VI / PART B	I M1	6 OF 51	3.02.07	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.		Bidder shall provide the proposed cladding methods as per the NTPC approved fabrication procedures, tests and Quality plan such that it meets the plant operation requirements.
283.	SEC VI / PART B	IV D	39 OF 69	20.00.00	Electrodes	Please provide the detail/type of electrodes to be used in welding of titanium/C276.	Type of electrode will be as per Qualified WPS. This qualified WPS needs to be submitted for NTPC approval.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
284.	SEC VI / PART B	IV D	39 OF 69	20.07.00	Edge Preparation for Welding	Please provide edge preparation detail for titanium/C276 material.	Edge Preparation detail will be as per Qualified WPS. This qualified WPS needs to be submitted for NTPC approval.
285.	SEC VI / PART A	V	8 OF 26	5.01.00	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.	Please provide the material code to be followed for alloy C-276.	Specification requirement is clear. Bidder shall comply with the specification requirements.
286.	SEC VI / PART B	I M1	6 OF 51	3.02.07	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.		

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
287.	SEC VI / PART A	V	8 OF 26	5.01.00	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.	Kindly furnish the following specifications for chimney liners. 1. Permissible tolerances on thickness of clad sheet and base material. 2. Permissible tolerances on flatness for clad sheet and base material. 3. Specify the quality tests which will be conducted on the clad sheet for assessing mechanical and chemical properties and on the chimney cans after fabrication. 4. Indicate any special requirements applicable for welding and fabrication of chimney at site. 5. Indicate any restriction in size of base metal and clad plate to be used for fabrication of flue cans. 6. Mention tensile and yield strength of the clad material to be achieved.	Specification requirement is clear. Bidder shall comply with the specification requirements.
288.	SEC VI / PART B	I M1	6 OF 51	3.02.07	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.		Bidder's understanding is Correct.
289.	SEC VI / PART A	I	10 OF 19	4.02.03	For Chimney, Bidder or its agency should have in the past built at least one (1) Reinforced concrete chimney of minimum 100m height.	Bidder understands that, there is no other prequalification requirements related to fabrication and erection of titanium/ c276 clad steel flue liner in chimney. Please confirm.	Bidder's understanding is Correct.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
290.	SEC VI / PART B	IV D	2 OF 69	2.03.00	Bidder or its agency should have in the past built at least one (1) Reinforced concrete chimney of minimum 100m height.		
291.	VI / A	V	8 OF 26	5.01.00	A "wet Chimney" shall be installed downstream of Wet Flue Gas Desulfurization (FGD) system by the Contractor...	The location of new Wet Chimney shall be near to Existing Chimney in the space provided clearing foundation interface. The design of Wet Chimney shall be done considering interface factor of existing chimney as determined by wind tunnel study. However, no design check or validation shall be done for existing chimney/structures/buildings. Kindly confirm.	It is confirmed that no design check or validation shall be done by the bidder for existing chimney(s).

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
328.	VI/A	III-D	2 of 4	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
329.	VI/B	IV-D	26 of 69	10.00.00	Site leveling of gypsum storage area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block. Each block shall be finished to the formation level as specified in drawing...	In tender drawings only space for FGD area is marked. No FGL is mentioned for FGD area blocks. Kindly clarify and furnish the same.	FGL is indicated in General Layout plan
330.	VI/B	IV-D	31 of 69	14.00.00	Storm water drain shall be designed taking into account the finished ground levels of the plant area, drainage pattern, intensity of rainfall, etc. with a return period of 50 years. These values shall be based on rainfall intensity of 90mm/hr.	The referred clauses are contradictory. Kindly clarify the rainfall intensity to be considered for designing the plant storm water drain.	The value of minimum rainfall intensity shall be taken as 75mm/hr. Refer amendment issued separately.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
331.	VI/B	IV-D	41 of 69	21.00.00	The plant storm water drainage shall be designed taking into account the finished grade levels of the plant area, drainage pattern, intensity of rainfall, etc., The storm water drainage shall cater to storm water run off resulting from one hour rainfall intensity, with a return period of 50 years. The value of minimum rainfall intensity shall be taken as 75mm/hr.		
332.	VI/B	IV-D	24 of 69	7.00.00	In case Bidder opts for steel super-structure with RCC floors/ roof, the bidder shall necessarily use Troughed permanently colour coated metal decking sheets having minimum thickness of 0.8mm as permanent shuttering...	In case Bidder opts for steel super-structure with RCC floors/roof, kindly specify the cladding system to be adopted (Brick Cladding / Metal Sheet Cladding).	Refer SI.No.81

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
333.	VI/B	IV-D	25 of 69	7.00.00	(1) Within the FGD blocks, kindly specify whether the balance area (i.e. area excluding various facilities/buildings, passage areas, plinth protection to facility buildings, additional paving of 5m width all around the tank foundations and other facility buildings beyond the extent of plinth protection, etc.) is to be paved or left unpaved. (2) In case paving is required for the balance area, kindly specify the type of paving (Normal Duty paving/Heavy Duty paving) to be adopted.	Refer SI.No.82
334.	VI/B	IV-D	25 of 69	7.00.00	The paving shall be provided with slope of 1:500 to dispose the surface water/wash water to the nearest drain.	
335.	VI-A	II-A2	23-39 of 48	Annexure-II	Geotechnical investigation report is not readable. Please provide the report in readable format.	Bidder to refer amendment.
336.	SEC VI / PART B	I M1	6 OF 51	3.02.07	These clauses are contradictory. Bidder understands that if 2mm thick titanium/ C276 sheet wrapping over insulation is provided then no painting is required on	No painting is required on external surface of chimney flue liner projecting above chimney roof. Also refer Amendment in this regard.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
337.	SEC VI / PART B	IV D	15 OF 69	3.14.09 (iv)	, external surface of mini-shell above roof etc shall be painted with epoxy phenolic coating system having total 220 microns DFT.	external surface of the chimney flue liner projecting over the chimney roof. Please confirm.	
338.	SEC VI / PART A	V	8 OF 26	5.01.00	External surface of chimney flue liner projecting over the chimney roof shall be wrapped with 2 mm thick Titanium / C-276 sheet over insulation.		
339.	SEC VI / PART A	V	8 OF 26	5.01.00	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.	Bidder understands that cladding can be done with explosion bonding or hot rolling or combination of both to achieve the required quality as per ASTM B 898-11. Please confirm.	Bidder shall provide the proposed cladding methods as per the NTPC approved fabrication procedures, tests and Quality plan such that it meets the plant operation requirements.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
340.	SEC VI / PART B	I M1	6 OF 51	3.02.07	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.		
341.	SEC VI / PART B	IV D	39 OF 69	20.00.00	Electrodes	Please provide the detail/type of electrodes to be used in welding of titanium/C276.	Type of electrode will be as per Qualified WPS. This qualified WPS needs to be submitted for NTPC approval.
342.	SEC VI / PART B	IV D	39 OF 69	20.07.00	Edge Preparation for Welding	Please provide edge preparation detail for titanium/C276 material.	Edge Preparation detail will be as per Qualified WPS. This qualified WPS needs to be submitted for NTPC approval.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
343.	SEC VI / PART A	V	8 OF 26	5.01.00	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.	Please provide the material code to be followed for alloy C-276.	Specification requirement is clear. Bidder shall comply with the specification requirements.
344.	SEC VI / PART B	I M1	6 OF 51	3.02.07	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.		
345.	SEC VI / PART A	V	8 OF 26	5.01.00	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11.	Kindly furnish the following specifications for chimney liners. 1. Permissible tolerances on thickness of clad sheet and base material. 2. Permissible tolerances on flatness for clad sheet and base material. 3. Specify the quality tests which	Specification requirement is clear. Bidder shall comply with the specification requirements.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
346.	SEC VI / PART B	I M1	6 OF 51	3.02.07	The chimney flue liner cladding shall be made of 2 mm thick Titanium (Grade 2 as per ASME SB265) or C-276 alloy over 8 mm thick (minimum) mild steel base metal of flue liner. Cladding shall be done to achieve the required quality as per ASTM B 898-11. will be conducted on the clad sheet for assessing mechanical and chemical properties and on the chimney cans after fabrication. 4. Indicate any special requirements applicable for welding and fabrication of chimney at site. 5. Indicate any restriction in size of base metal and clad plate to be used for fabrication of flue cans. 6. Mention tensile and yield strength of the clad material to be achieved.	
347.	SEC VI / PART A	I	10 OF 19	4.02.03	For Chimney, Bidder or its agency should have in the past built at least one (1) Reinforced concrete chimney of minimum 100m height. Bidder understands that, there is no other prequalification requirements related to fabrication and erection of titanium/ c276 clad steel flue liner in chimney.	Bidder's understanding is Correct.
348.	SEC VI / PART B	IV D	2 OF 69	2.03.00	Bidder or its agency should have in the past built at least one (1) Reinforced concrete chimney of minimum 100m height. Please confirm.	

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / QUERIES	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
349.	VI / A	V	8 OF 26	5.01.00	The location of new Wet Chimney shall be near to Existing Chimney in the space provided clearing foundation interface. The design of Wet Chimney shall be done considering interface factor of existing chimney as determined by wind tunnel study. However, no design check or validation shall be done for existing chimney/structures/buildings. Kindly confirm.	It is confirmed that no design check or validation shall be done by the bidder for existing chimney(s).

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Vol No	Clause No.	Page No.	Issues	Comments / Clarifications	NTPC reply
350.	Sec-VI Part-D ,ECC	Clause no. 28.04.00	Page no. 12	Site laboratory for Civil Work	Bidder through its civil work sub-contractors will set up a temporary field quality Lab to conduct normal civil work tests at site. However, customer to allow bidder/it's subcontractors to take back those field quality lab equipment after completion of work at site. Please confirm.	We understand that after completion of work at site, contractor may be allowed to take back their lab equipments.

SL.	ENQUIRY SPECIFICATION	SPECIFICATION REQUIRE-	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION				SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.			
384.	VI-PART-B	VI-D CIVIL WORKS	24 of 69	6.08.00	Access to RCC roof of Gypsum dewatering building, FGD Control room building, MCC building, ball Mill building shall be through RCC staircase and roof access to all other buildings all shall be through cage ladder as per requirement	It is proposed to provide steel staircases for access to operating floors of all buildings except FGD Control room/MCC building. RCC staircase will be provided for FGD Control room/MCC building. Cage ladder may be allowed for access to roofs of all buildings with roof sheeting. Kindly accept	Bidder shall comply with technical specification requirement.
385.	VI-PART-B	VI-D CIVIL WORKS	-	-	Ball Mill Building:	Type of construction of Ball Mill building is not mentioned in the technical specification. Bidder proposes to use structural steel building with roof sheeting and side cladding (sheeting and cladding with permanently colour coated sheeting). Kindly confirm.	Type of building structure (Steel/RCC) and cladding system shall be decided by the bidder considering the functional requirement, schedule of construction and site constraints (if any). However, roof shall be of RCC as per technical specification requirement.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
386.	VI-PART-B	VI-D CIVIL WORKS	-	-	Type of construction of Gypsum Dewatering building is not mentioned in the technical specification. Bidder proposes to use structural steel building with roof sheeting and side cladding (sheeting and cladding with permanently colour coated sheeting). Floor of Vacuum belt filter will be RCC over metal deck sheeting. Kindly confirm.	Bidder shall comply with technical specification requirement.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



SL. NO	ENQUIRY SPECIFICATION			SPECIFICATION REQUIREMENT	COMMENTS / CLARIFICATIONS	NTPC CLARIFICATIONS
	SEC/ PART	SUBSEC.	PAGE NO.	CLAUSE NO.		
387.	VI-PART-B	VI-D CIVIL WORKS	-	-	Type of construction of the building to house recirculation pumps and oxidation blowers is not mentioned in the technical specification. Bidder proposes to use structural steel building with roof sheeting and side cladding (sheeting and cladding with permanently colour coated sheeting). Kindly confirm.	Type of building structure (Steel/RCC) and cladding system shall be decided by the bidder considering the functional requirement, schedule of construction and site constraints (if any). However, roof shall be of RCC as per technical specification requirement.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



S.No	Clause No	Page No.	Description of Bid Document	Bidders Queries/Suggestions	NTPC Clarifications
					iii) Bidder's query is not clear. Bidder shall comply with the specification requirement.
425.	Section VI/Part B/SubSection-IV-CIVIL			Please provide the geotechnical investigation report and the trial pile report for the main power building.	Bidder to refer Project information chapter. Bidder to refer necessary amendment in this regard.
426.	Section VI/Part A/Sub Section III Scope of Supply and Services			Please confirm the scope of supply for water supply and drainage? Is sanitary ware not within the scope of supply?	Specification requirement is clear. Bidder shall comply with the specification requirements.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Section/Part/Chapter	Clause No.	Page No.	Bid Specification	Clarification sought by the bidder	NTPC CLARIFICATIONS
538.	Section-VI (TS) Part-B Sub-section-II E15 Station Lighting	4.00.00.10 (I)	8 of 16	Lighting Panels shall be of following types:	Please clarify the purpose of 3kVA transformer located inside of LP-3 type lighting panel itself.	LP-3 shall be used for feeding of RC receptacle as mentioned in technical specification. Kindly refer clause no:- 4.00.00.10.h
539.	Section-VI (TS) Part-B Sub-section-II E15 Station Lighting	Annexure - A.	15 of 16	Annexure - A.	Please clarify average illumination Lux levels (or ratio (%) of fixture) to be adopted in certain area where Emergency AC, Normal DC, Emergency DC Lightings are installed.	Refer to Annexure-B in Station Lighting chapter. Amendment-1 issued
540.	Section-VI (TS) Part-B Sub-Section IV-D Civil Works	3.14.00	10 of 69	Single flue or multiple flue chimneys to be provided	Bidder suggests that this chimney might not be necessary. Please confirm.	Bidder shall comply to the requirements of technical specification.
541.	Section-VI (TS) Part-B Sub-Section IV-D Civil Works	12.00.00 (Roads)	30 of 69	Concrete pavement for roads shall be min. 250mm thick slab	Please clarify which particular specification about roads needs to be followed.	Query is not dear

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Section/Part/Chapter	Clause No.	Page No.	Bid Specification	Clarification sought by the bidder	NTPC CLARIFICATIONS
542.	Section-VI (TS) Part-B Sub-Section IV-D Civil Works	12.00.00	31 of 69	Dry lean concrete shall be minimum M10 grade and concrete pavement slab shall be minimum M35 grade concrete.	Please clarify which particular specification about roads needs to be followed.	Query is not clear
543.	Section-VI (TS) Part-B Sub-Section IV-D Civil Works	21.00.00	41 of 69	RCC paving of min. 150mm thick with M25 grade concrete	Please clarify which particular specification about roads needs to be followed.	Query is not clear
544.	Section-VI (TS) Part-B Sub-Section IV-D Civil Works	29.02.00	48 of 69	Interconnecting walkway between various structures, buildings & facilities shall be finished with 22mm chequered concrete tiles	Please confirm - between which structures / buildings are interconnecting walkways required? Further, if the interconnecting walkways (if any) are steel structures, can we use steel chequered plate / gratings in place of chequered concrete tiles?	As the layout of FGD system is in Bidder's scope, ascertaining the requirement of Interconnecting walkway between various structures, buildings & facilities is in the scope of Bidder. For finishing schedule, Bidder shall comply with technical specification requirement.
545.	Section-VI (TS) Part-B Sub-Section	31.03.00	56 of 69	All steel surfaces should be provided with two component moisture curing zinc silicate primer	What separate paint is required other than the primer, intermediate & final coat already provided in the shop?	For steel sections and structures which are to be transported on sea, anti-corrosive paint before shipment shall be provided to take care of sea worthiness.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Section/Part/Chapter	Clause No.	Page No.	Bid Specification	Clarification sought by the bidder	NTPC CLARIFICATIONS
	IV-D Civil Works			coat, followed by polyamide curved epoxy (with MIO content) intermediate & aliphatic isocyanate curved acrylic final coat, all in shop	Please clarify.	
546.	Section-VI (TS) Part-B Sub-Section IV-D Civil Works	31.07.00	57 of 69	All steel sections & fabricated structures, which are required to be transported by sea, shall be provided with anti-corrosive paint before shipment to take care of sea worthiness	Same with above.	For steel sections and structures which are to be transported on sea, anti-corrosive paint before shipment shall be provided to take care of sea worthiness.
547.	Section-VI (TS) Part-E List of Tender Drawings	ELECTRICAL SINGLE LINE DIAGRAM FOR FGD PACKAGE	53 of 53	GENERAL NOTE 11. Panel being used for feeding of CHP	Bidder understands scope of supply for cabling from 11kV FGD TIE SWGR to 11/3.45kV Exiting CHP/AHP TR as below. Please confirm. - Power Cable: Supplied by FGD Supplier's - Cable raceway: Supplied by employer. (up to employer's trestle : Supplied by FGD Supplier's)	Refer amended tender SLD. -Bidder shall comply with technical specification requirement clause no: - 1.08.00.2.However bidder may visit the project in order to get itself acquainted with existing electrical of plant. GLP of respective plants has already been attached.

CLARIFICATION No.01 (TECHNICAL)

Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Specification Reference			Employer (NTPC) Specification	Bidder Requested Clarification	NTPC Clarifications
	Part	Sub-section	Clause no.			
678.	SECTION – VI, PART-D	Erection Condition of contract	44.22.00	Hydra shall not be used for material transport	Bidder understanding is that Farna shall be used in place of Hydra.	Specification requirement is clear. Bidder shall comply with the specification requirements.
679.	SECTION – VI, PART-A	Scope of supply and Services	2.00.00 (10)	Providing all necessary fire fighting devices/ Equipment/Fire tender etc. required during the project execution.....	Bidder shall provide all fire fighting devices / Equipment during the entire Project Execution period for its scope of work. However Bidder requested Employer to provide the Fire Tender of the existing Plant during emergency if required	Bidders understanding/request is not correct.
680.	SECTION – VI, PART-B	SUB-SECTION- VI-D Civil Works	4.01.00	Drainage System	Bidder clarifies that Employers existing drain invert level shall be necessary to plan the RCC drain(in the scope of Bidder) on which water from the pit in FGD area shall be diverted. So Bidder request Employer furnish the above information.	Refer General Layout Plan. Road and drain drawing shall be provided after award.
681.	SECTION – VI, PART-A	SUB-SECTION- II-A2-Project Information- Lara-I 2X800 MW	Annexure-II	Borelog Data Sheet	The Location and Coordinates of various borelogs marked in the data sheet does not match with the location indicated in GLP.	Bidder may refer Clause No.7.00.02, as mentioned in Clause No. 7.00.02, the available borelog data is of vicinity to proposed structure and the

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
860.	Section VI / Part A / Subsection III A5	3.01 .00	6 of 6	Gypsum shall be conveyed from the vacuum belt filter to the storage shed through a series of double stream conveyors and transfer points/junction towers.		
861.	Section VI / Part A / Sub Section III A1	3.00.00	2 of 9	The contractors scope shall include a common limestone grinding system for all the units and shall comprise of.....	Bidder understands that limestone handling system is in Bidder's scope. Kindly confirm.	Bidder's understanding is correct. Bidder to refer necessary amendment in this regard.
862.	Section VI / Part A / Subsection III A5	2.01.00	2 of 6	Limestone Handling Plant (LHP)		
863.	Section VI / Part A / Sub Section III D CIVIL WORKS	1.06.00	2 of 4	Uniform Finished Ground Level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing.	Bidder understands that filling / cutting of earth is in his scope in areas other than the main absorber. Kindly confirm.	Refer amendment issued separately.
864.	Section VI / Part A / Sub Section IV Terminal points and Exclusions	1.10.00	2 of 3	Outlet of gypsum storage silo/ shed	As per section VI, Part-A, Sub Section III - A5, Page 2 of 6, "Gypsum to be conveyed to gypsum storage Shed". Bidder shall consider only a storage shed for gypsum. Kindly confirm.	Confirmed.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
865.	Section VI / Part B / Sub Section IV-D Civil Works	3.07.00	8 of 69	Gypsum storage shed The gypsum storage shed shall be RCC framed structure with structural steel work shed with permanent colour coated profile steel sheet roof and side cladding...	Bidder requests for an option for the gypsum storage shed to be made of structural steel superstructure with Structural columns and sheeting. Kindly confirm.	Bidder shall follow technical specifications in this regard. Bidder shall also refer s.no.1 of amendment no 1 in this regard.
866.	Project information			Wind and seismic codes	Kindly confirm the following: 1) Bidder would like to consider IS 875 (Part-3):2015 for wind loading 2) Bidder would like to consider IS 1893 (Part 2):2016, "General provisions and buildings" for buildings and IS 1893 (Part-4) : 2015 "Industrial structures including stack - like structures" for stacks along with site specific spectra provided.	Bidder shall comply to site specific "criteria for wind and earthquake resistant design of structures" specified in "Project information" section of technical specification.
867.	Section VI / Part A / Sub Section II-A6 Project information, Solapur (2X660MW)	7.08.00	19 of 31	Employer has carried out geotechnical investigation in vicinity to the proposed area. Logs of representative boreholes for bidder's information in the vicinity of proposed area are enclosed with	Kindly furnish the annexure mentioned in the clause referred in the specification.	Bidder to refer amendment

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
872.	Section VI, Part B, Subsection IV-D - Civil works	39.03.00	66 of 69	Fly ash based Portland poz-zolona cement conforming to IS:1489, Part I shall preferably be used.	a) OPC cement mixed with fly ash can also be used for FGD structures except for Chimney. Owner to please confirm. b) Clause 39.03.00 is not applicable for Chimney shell. For Chimney shell, bidder have to use OPC cement only. Please confirm bidder's understanding.	a. Bidder shall comply with Technical specification requirement. b. For chimney shell, only OPC cement shall be used.
873.	General				Only two borelogs are furnished in the tender document for Barh project. Bidder request Owner to furnish additional bore holes as the FGD structures are located in a scattered manner within the existing units.	Bidder may refer Clause No.7.00.02, as mentioned in Clause No. 7.00.02, the available borelog data is of vicinity to proposed structure and the same has already been furnished in the tender document. Detailed Geotechnical Investigation shall be carried out by contractor.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
875.	Section VI, Part A, Subsection IIID, Page 1 of 4	2.00.00	2 of 4	Bidder shall provide permanent access to all facilities/structures from the near-by existing roads of the Owner. Roads shall be in concrete (M 35) as per IRC.... Width of all such roads shall be 7.5 M concrete pavement.	Bidder requests NTPC to provide width requirement for shoulders? Also whether shoulders are required on both sides of road?	Refer amendment issued separately.
	Section VI, Part B, SubSection IV-D	12.00.00	30 of 69	The road construction including its shoulders, base, sub base and concrete pavement shall be as per IRC standard.		
876.	Section VI, Part A, IIA-10	7.03.00, d)	12 of 30	Pile diameter - 600 mm	NTPC Barh - Being an EPC bid, Owner to allow bidder to select pile diameter, length and capacities as per detailed soil investigation and test pile result.	Bidder shall comply the provisions of technical specification.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
879.	Section VI, Part B, Subsection IV-D - Civil worksSection VI, Part A, Subsection II - A11Section VI, Part A, Subsection II - 8A	39.03.003 9.04.007.0 8.00 g)Annexure-III (New Nabina-gar-I)	66 of 6966 of 6922 of 2921 of 31	Fly ash based Portland poz-zolona cement conforming to IS:1489, Part I shall preferably be used....or Fe500D, and conforming to other requirements of IS:1786Chemicals in ground water as observed during investigation are:.....Cement type - As specified elsewhere in the specification.g)Special requirements:Chemicals in ground water as observed during investigation are:.....In view of the above, the following shall be adopted for all foundations and substructures,	BRBCL and Nabinagar - No separate specification for cement type and reinforcement steel are mentioned in the relevant subsection. Hence bidder shall follow clause no. 39.03.00 for Cement and clause no.39.04.00 (Subsection IV-D, Section VI, Part B) for Reinforcement steel for projects, wherever special requirements are not mentioned. Please confirm bidder's understanding.	Bidders's understanding is correct.
BIDDING DOCUMENT NO.: CS-0011-109(1A)-2				Doc No: CS-0011-109(1A)-2-CLRF-TECH-01	Page 397 of 736	

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
880.	Section VI, Part B, Sub Section - I- M1 Section VI, Part B, Subsection-IV-D - Civil works	3.00.00 3.14.04	5 of 51 13 of 69	The entire flue gas system, flue gas ducts, absorber etc. shall be designed to meet the following conditions: Criteria of flue gas exit velocity for sizing the flue liner material shall be specified elsewhere in the specification.	Owner to specify the below mentioned details for design of 150 m high Chimney: a) Maximum Flue gas exit velocity b) Pressure at Chimney Inlet to be considered by bidder for design. The above mentioned details have not been furnished in tender specification.	a) Specification requirement is clear under the referred cl.no. . Bidder shall comply with the specification requirements. b) To be optimized by the bidder based on its system design and selection.
881.	Errata 1 to Section VI, Part A, Subsection II - A8	Annexure B	9 of 31	a) The basic wind speed "Vb" at ten	NTPC 3x660MW/Nabinagar - The basic wind speed Vb at ten meters above the mean ground level may please be specified.	The basic wind speed "Vb" at 10m height above the mean ground level for "NABINAGAR-I 3X660 MW" project shall be 47 metres/second. Also refer Amendment issued separately in this regard.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects

Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
882.	Section VI, Part A, Subsection IIA6-4		Equipment layout plan at El 0.00 m	NTPC Solapur - All elevations indicated in the drawing are wrt TG building ground floor elevation as (+/-)0.00 which corresponds to RL(+) 416.5	NTPC Solapur - Bidder understands that FGL for the plant is RL 461 m whereas TG ground floor level i.e. FFL is RL 461.50. Please confirm.	Bidder's understanding is correct.
883.	Section VI, Part A, Subsection IIA6-4	7.00.01	9 of 31	The corresponding bore logs are enclosed at annexure-IV.	NTPC Solapur - Owner to furnish soil investigation report for the vicinity area as the same are not available with tender document.	Bidder to refer amendment.
884.	Section VI, Part B, Sub Section - IV-D	12.00.00	31 of 69	Concrete pavement of the road shall be done with fully mechanized paver fitted with electronic sensors for construction technique.	As quantum of road work is very less and considering lack of space within the existing units, bidder understands that deployment of mechanical pavers are not mandatory. Owner to kindly confirm bidder's understanding.	Method(s) as per IRC may be followed.
885.	Section VI, Part B, Sub Section IV D, Civil works	10.00.00	26 of 69	Site LevellingSite levelling of gypsum area, lime storage area, gypsum dewatering area, truck hopper and associated areas to be levelled in one block.	Bidder is free to decide FGL based on existing NGL in order to optimize cutting and filling quantities. Owner to please confirm.	Site levelling shall be done by Owner as per the levels specified in GLP in tender document. Only site clearance and minor grading is in bidder's

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
						scope.
886.	Section VI, Part A, Subsection II-A4	Annexure III	19 of 30	Employer has carried out geotechnical investigation in vicinity to the proposed area. Logs of representative boreholes for bidder's information in the vicinity of proposed area are enclosed with this Annexure	Geotechnical investigation for Dalipalli Stage-I, 2x800 MW project is not attached along with the tender document. Owner is requested to furnish the same.	Refer amendment issued separately
887.	Section VI, Part B, Sub Section - IV-D	19.00.00	39 of 69	All steel structures shall be fabricated in factory, transported and erected at site.	Bidder understands that fabrication of silo/hoppers /tanks /absorber shell,etc. can either be fabricated at factory or fabricated at site. In case of site or shop fabrication, field connection will be welded. Please confirm bidder's understanding.	Considering the large dimensions of the said equipment, Bidder's understanding is correct.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
913.	Section VI, Part B, Sub Section IV D, Civil works	17.21.00 b)	37 of 69	Waterproofing treatment shall be provided for liquid retaining/carrying structures and basement type structures (requiring dry working condition). Truck hopper - Chemical injection grouting for inner faces. Polymer modified cementitious coating on earth side face as per the following:	Bidder understands that clause no. 17.21.00 of subsection IV-D Civil works, is not applicable for truck hopper and limestone hopper. Please confirm.	Bidder's understanding is correct.
914.	Section VI, Part B, Sub Section IV D, Civil works	3.01.00	3 of 69	The FGD system shall have an independent absorber for each unit, common limestone milling systems and common gypsum dewatering system for each Lot 1 A Project.	The space available for installation of FGDs at most sites is very limited. In such cases, it shall be beneficial to optimise the available space when offered technology is capable to do so with equal effectiveness. Bidder offers Jet Bubbling Technology, which has excellent flexible operability even at turnaround ratios of 15%. We request NTPC to accept option of offering combined absorber for multiple units. Our collaborator has proven references of such common absorbers installed for multiple units operating successfully globally.	Specification requirement is clear. Bidder shall comply with the specification requirements.

CLARIFICATION No.01 (TECHNICAL)

Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No	Section / Part / Chapter / Volume	Clause No.	Page No.	Bid specification	Bidder's Query	NTPC's Clarification
916.	SECTION-VI, PART-B/ SUB SECTION-1-M3/COMPRESSED AIR SYSTEM	2.02.02	1 of 7	The rotor and shaft shall be of single piece construction, made of forged steel (AISI C1141 or equivalent). The stator (casing) shall be of Cast-Iron (IS-210 grade) Construction with integral jacket cooling. The rotors shall be dynamically balanced to reduce vibration.	Bidder would like to clarify that, material of construction of compressors shall be as per manufacturer' s standard design which is proven in the industry. Owner is requested to accept the same.	Bidder shall comply with specification requirement. However, any superior material may be accepted as per manufacturer proven design practice
917.	SECTION-VI, PART-B/ SUB SECTION-1-M3/COMPRESSED AIR SYSTEM	4.11.00	2 of 7	For the instrument air compressors offered with "Heat of compression" type air drying plants, the after coolers shall be provided at downstream of Air Drying Plant.	Bidder would like to clarify that, after cooler shall be integral part of compressor instead of installing the seperate aftercooler downstream of air dryer and the hot air required for HOC type dryer regeneration shall be taken from last stage of compressor, before after cooler as per prevailing industry practice. Owner is requested to accept the same.	Bidders query is not clear. In HOC type Air dryer, to reduce the discharge temperature at dryer outlet to 45 deg celcius, after cooler shall be provided at downstream of air dryer as per specification requirement.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No.	Section No.	Clause No.	Bid Specification Stipulation	Bidder's Query / Stipulation	NTPC Clarifications
1161.	Part-A-Sub Section-II-A6	Clause no.7.08- Page no.19	Foundation System and Geotechnical Data- Type of Foundation system to be adopted- Open Foundation system.	The foundation design shall be based on final recommendations of geotechnical investigation report approved by Client during execution. Provision shall be made for appropriate compensation if any major variation in the soil data/ sub-soil conditions if identified.	Bidder may refer Cl. No. 7.00.03. If bidder feels, data provided is not adequate, he may carry out geotechnical investigation for bidding purpose. Further, Bidder shall comply the provisions of Technical Specification.
1162.	Sub-Section-IVD -CIVIL WORKS	Clause no.12.00	RCC Roads & RCC Drains	Bidder understands that only approach roads along with drains on both sides shall be provided from the new structures of the proposed FGD. The main plant roads and drains shall be in the scope of the client. Please confirm.	Refer Scope of work. Refer clause 2.00.00 Section-VI, Part-A of technical specification.
1163.	Sub-Section-IVD -CIVIL WORKS	Clause no.13.00	Gate Along Boundary Wall	Bidder understands that any works for construction of gate along boundary wall is excluded from the bidders scope of work.	Refer Scope of work. Refer clause 2.00.00 Section-VI, Part-A of technical specification.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No.	Section No.	Clause No.	Bid Specification Stipulation	Bidder's Query / Stipulation	NTPC Clarifications
1164.	Sub-Section- IVD -CIVIL WORKS	Clause no.4.01	Contractors scope shall include construction of necessary culverts below railway lines/ roads as per the railway/IRC standards and shall take approvals of railway culverts from the concerned railway authorities.	Bidder has considered RCC hume pipe culverts only below the approach roads in the scope of works for this package. Bidder has excluded the construction of culverts below railway lines and taking their approvals from necessary railway authorities. Bidder request client to kindly confirm.	Bidder shall comply with technical specification requirement.
1165.	Sub-Section- IVD -CIVIL WORKS	Clause no.14.00	The Storm Water drainage for any area under consideration shall be taken in to account the finished grade levels of the area.	Bidder has considered only the drains along the approach roads and garland drains around the proposed structures. These drains shall be connected to the nearest main plant drains with proper slopes. Please confirm.	Bidder's understanding is correct.
1166.	Sub-Section- IVD -CIVIL WORKS	Clause no.25.02	Excavations in hard rock shall be carried by Blasting if required. The contractor shall obtain license from the competent authorities for undertaking blasting works.	Bidder request client to take necessary statutory permissions required for Blasting from the concern authorities. Bidder has excluded these from their scope of work.	Bidder shall comply with technical specification requirement.
1167.	Sub Section I-M1	Clause 5.06.06	Mist eliminator	Whether bidder can propose roof type ME with PP material	Bidder can propose roof type Mist Eliminators with the material specified in the Technical Specification.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



S.No	Vol No/Clause No	Page No.	Description of Bid Document	Queries/Suggestions	NTPC Clarifications
1	SECTION -VI TECHNICAL SPECIFICATION, Clause: 3.14.03	1	The wind shield shall be designed for vertical loading, cross wind loading, seismic loading, circumferential wind loading, thermal gradients etc. The load calculation and load combinations shall be as detailed in IS 4998 (Part 1) : 1992. The wind shield shall be analysed for cases with and without flue liner loads.	NTPC to clarify wind shield design shall be performed as per IS 4998 (Part 1) : 1992 or IS 4998 (Part 1) : 2015.	Bidder shall comply to the requirements of technical specification.
2	SECTION -VI TECHNICAL SPECIFICATION, Clause: 3.14.03	2	The effect of the openings/cut-outs in the chimney shell shall be duly considered in the design of the windshield. The minimum thickness of shell shall not be less than 500mm.	NTPC to confirm the minimum thickness of shell shall be as per IS 4998(Part-1) or 500mm.	Bidder shall comply to the requirements of technical specification.
3	SECTION -VI TECHNICAL SPECIFICATION, Clause: 3.14.01	10		As there is no clarity regarding mini shell above roof level, it is proposed to extend the steel flu can above chimney roof with 2 mm thick Titanium / C-276 sheet over insulation as per clause 3.02.07 of SUB-SECTION-I-M1(Part-B) on external surface of the steel flu extended above roof. No RCC mini shell considered. NTPC to confirm.	Flue liner shall be provided as per the requirements of technical Specification. There is no specific requirement of RCC mini-shell.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sr. No.	Section No.	Clause No.	Bid Specification Stipulation	Bidder's Query / Stipulation	NTPC Clarifications
1170.	Sub-Section-IVD -CIVIL WORKS	Clause no.12.00	RCC Roads & RCC Drains	Bidder understands that only approach roads along with drains on both sides shall be provided from the new structures of the proposed FGD. The main plant roads and drains shall be in the scope of the client. Please confirm.	Refer Scope of work. Refer clause 2.00.00 Section-VI, Part-A of technical specification
1171.	Sub-Section-IVD -CIVIL WORKS	Clause no.13.00	Gate Along Boundary Wall	Bidder understands that any works for construction of gate along boundary wall is excluded from the bidders scope of work.	Refer Scope of work. Refer clause 2.00.00 Section-VI, Part-A of technical specification.
1172.	Sub-Section-IVD -CIVIL WORKS	Clause no.4.01	Contractors scope shall include construction of necessary culverts below railway lines/ roads as per the railway/IRC standards and shall take approvals of railway culverts from the concerned railway authorities.	Bidder has considered RCC hume pipe culverts only below the approach roads in the scope of works for this package. Bidder has excluded the construction of culverts below railway lines and taking their approvals from necessary railway authorities. Bidder request client to kindly confirm.	Bidder shall comply with technical specification requirement.
1173.	Sub-Section-IVD -CIVIL WORKS	Clause no.14.00	The Storm Water drainage for any area under consideration shall be taken in to account the finished grade levels of the area.	Bidder has considered only the drains along the approach roads and garland drains around the proposed structures. These drains shall be connected to the nearest main plant drains with proper slopes. Please confirm.	Bidder's understanding is correct.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects

Sr. No.	Section No.	Clause No.	Bid Specification Stipulation	Bidder's Query / Stipulation	NTPC Clarifications
1174.	Sub-Section-IVD -CIVIL WORKS	Clause no.25.02	Excavations in hard rock shall be carried by Blasting if required. The contractor shall obtain license from the competent authorities for undertaking blasting works.	Bidder request client to take necessary statutory permissions required for Blasting from the concern authorities. Bidder has excluded these from their scope of work.	Bidder shall comply the provisions of Technical Specification.
1175.	Sub Section I- M1	Clause 5.06.06	Mist eliminator	Whether bidder can propose roof type ME with PP material	Bidder shall comply with the requirements of Technical Specifications.
1176.	Sub Section I- M1	Clause 5.03.02	Oxidation Blower	The stoichiometric ratio of 2.5 was mostly used in the past for grid type of oxidation, now a day with new spargers, lower SR typically below 2 are in use, can we consider lower SR. Also whether we can offer 3 blowers (2W+1S) common for two units	Bidder shall comply with the requirements of Technical Specifications.
1177.	Extension			As explained during pre-bid meeting, requirement of site visits and overall complex nature of project, we request the bid submission date extension up to 17.10.2017	Not a technical query.

S. No.	Section	Clause No	Page No.	Statement of Deviation/Part/Chapter	Variations / Exceptions	NTPC Clarifications
B.	TECHNICAL DEVIATION					

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Specification Reference			Employer (NTPC) Specification	Bidder Requested Clarification	NTPC Clarifications
	Part	Sub-section	Clause no.			
1210.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information- Nabinagar STPP-I, 3x660 MW)	GLP (Drawing No. 0370-999-POC-F-001, Rev-9)	2 nos. Belt conveyor (2A & 2B) traveling from PH-1 to Crusher House I	Bidder request employer to furnish the following detail of Conveyor 2A & 2B between PH-1 to Crusher House I: - Structural Arrangement - Structural Drawings of Galary & Supports - GA of Conveyors - Capacity of existing coal conveyors etc.	Noted. Detailed drawings of existing facilities shall be provided with the successful bidder.
1211.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information- Nabinagar STPP-I, 3x660 MW)	GLP (Drawing No. 0370-999-POC-F-001, Rev-9)	Pipe/Cable trusses traveling near FGD area	Bidder request Employer to furnish the Foundation drawing of Cable/pipe Trestles coming near ID Fan outlet duct entering to stack and near FGD area.	Bidder to refer Table 6 of Sub Section- II-A8 PROJECT INFORMATION (NABINAGAR STPP-I 3 X660MW) Section –VI, Part-A for pipe/cable trestle drawings.
1212.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information- Nabinagar STPP-I, 3x660 MW)	GLP (Drawing No. 0370-999-POC-F-001, Rev-9)	Trestles shown near to "Space for FGD"	Bidder wish to clarify that during their site visit, they have seen that the Trestles near "Space for FGD" is under construction, so Bidder understand that Employer will provide space in the exist-	Stipulations, as given under Clause 14.00.00 Sub Section- III-A1 Section –VI, Part-A, shall be complied with w.r.t trestles. Bidder shall comply with technical specification re-

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Specification Reference			Employer (NTPC) Specification	Bidder Requested Clarification	NTPC Clarifications
	Part	Sub-section	Clause no.			
					ing/under construction trestles to install bidders supplied cables & pipes for FGD.	quirement clause no: - 1.08.00.2 Sub Section- III-B, Section –VI, Part-A.
1213.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information- Nabinagar STPP-I, 3x660 MW)	GLP (Drawing No. 0370-999-POC-F-001, Rev-9)	Space For FGD	During Bidders site visit, it was observed that there are some Contractors site office/store is already exist in the Space marked for FGD. So Employer is requested to furnish the clear levelled land for the spaces marked for FGD.	Bidder to refer the revised GLP in issued amendments.
1214.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information- Nabinagar STPP-I, 3x660 MW)	Geotechnical Investigation Scheme(Clause- 7.08.00- page19 of 31)	Soil Data and Foundation System	Bidder request Owner to provide the soil resitivity values for the FGD designated area.	Bidder may refer necessary Amendment.
1215.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information- Nabinagar STPP-I, 3x660 MW)	GLP (Drawing No. 0370-999-POC-F-001, Rev-9)	Storage/Laydown area/Area for dumping of excavated material	During site visit, it has been observed that no area has been earmarked for laydown/storage/ excavated material dumping other than the areas identified for FGD. Bidder	Bidder to refer the revised GLP in issued amendments.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Specification Reference			Employer (NTPC) Specification	Bidder Requested Clarification	NTPC Clarifications
	Part	Sub-section	Clause no.			
1216.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information- Nabinagar STPP-I, 3x660 MW)	GLP (Drawing No. 0370-999-POC-F-001, Rev-9)	Underground substructures, sewer pipes, water pipes, cables etc around the FGD	request Owner to please earmark areas at site for laydown/storage/ excavated material dumping. Bidder request Owner to please provide the drawings for underground pipes, cables, amenities, utilities etc around the FGD area .	Same will be discussed with the successful bidder during the detail engg. stage.
1217.	SECTION – VI, PART-A	SUB-SECTION-II-A8(Project Information- Nabinagar TPP, 4x250 MW)	GLP (Drawing No. 0270-999-POC-F-001, Rev-6)	Trestles shown near to "Space for FGD"	Bidder wish to clarify that during their site visit, they have seen that the Trestles near "Space for FGD" is under construction, so Bidder understand that Employer will provide space in the existing/under construction trestles to install bidders supplied cables & pipes for FGD.	Stipulations, as given under Clause 14.00.00 Sub Section- III-A1 Section –VI, Part-A, shall be complied with w.r.t trestles. Bidder shall comply with technical specification requirement clause no: - 1.08.00.2 Sub Section- III-B, Section –VI, Part-A.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Specification Reference			Employer (NTPC) Specification	Bidder Requested Clarification	NTPC Clarifications
	Part	Sub-section	Clause no.			
					ID Fan outlet ducts along with associated foundation drawings etc. enabling Bidder to decide the duct layout from tapping point to FGD area	INFORMATION (NABINAGAR TPP) Section –VI Part-A, being issued separately, for pipe/cable trestle drawings. Requested drawings as ID Fan outlet ducts foundation drawings will be discussed with the successful bidder during the detail engg. stage.
1222.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information-Nabinagar TPP, 4x250 MW)	Geotechnical Investigation Scheme(Clause-7.08.00- page 20 of 29)	Soil Data and Foundation System	Bidder request Owner to provide the soil resistivity values for the FGD designed area.	Bidder to refer necessary amendment in this regard.
1223.	SECTION – VI, PART-A	SUB-SECTION-II-A8 (Project Information-Nabinagar TPP, 4x250 MW)	GLP (Drawing No. 0270-999-POC-F-001, Rev-6)	Storage/Laydown area/Area for dumping of excavated material	During site visit, it has been observed that no area has been earmarked for laydown/storage/ excavated material dumping other than the areas identified for FGD. Bidder request Owner to please earmark areas at site for	Bidder to refer the revised GLP in issued amendments.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Specification Reference			Employer (NTPC) Specification	Bidder Requested Clarification	NTPC Clarifications
	Part	Sub-section	Clause no.			
1224.	SECTION – VI, PART-A	SUB-SECTION-II-A8(Project Information-Nabinagar TPP, 4x250 MW)	GLP (Drawing No. 0270-999-POC-F-001, Rev-6)	Underground structures, sewer pipes, water pipes, cables etc around the FGD	Bidder request Owner to please provide the drawings for underground pipes, cables, amenities, utilities etc around the FGD area .	Same will be discussed with the successful bidder during the detail engg. stage.
1225.	SECTION – VI, PART-E	Tender Drawing List-Electrical Single Line Diagram of FGD Package	Drawing No. 0011-109-POE-J-001A-E, Rev-A	11 KV KV HT SWGR Panel	Bidder wish to clarify that during their site visit, they have found only 6.6 KV HT SWGR at the main TG building instead of 11 KV. Bidder request Employer to furnish the revised SLD for BRBCL site.	Refer amended Tender SLD.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Specification Reference			Employer (NTPC) Specification	Bidder Requested Clarification	NTPC Clarifications
	Part	Sub-section	Clause no.			
1252.	SECTION – VI, PART-A	SUB-SECTION-II-A1 (Project Information- Kudgi Super Thermal Power Project-3x800 MW)	GLP (Drawing No. 9571- 999-POC-F-001, Rev- 5D0)	Storage/Laydown area/Area for dumping of excavated material	During site visit, it has been observed that no area has been earmarked for laydown/storage/ excavated material dumping other than the areas identified for FGD. Bidder request Owner to please earmark areas at site for laydown/storage/ excavated material dumping.	Bidder to refer the revised GLP in issued amendments.
1253.	SECTION – VI, PART-A	SUB-SECTION-II-A1 (Project Information- Kudgi Super Thermal Power Project-3x800 MW)	GLP (Drawing No. 9571- 999-POC-F-001, Rev- 5D0)	Underground substructures, sewer pipes, water pipes, cables etc around the FGD	Bidder request Owner to please provide the drawings for underground pipes, cables, amenities, utilities etc around the FGD area .	Same will be discussed with the successful bidder during the detail engg. stage.
1254.	SECTION – VI, PART-A	Subsection-III-D Civil	1.06.00	Uniform Finished ground level (FGL) in FGD absorber area shall be made available by the owner at a level specified in tender drawing	Bidder understand that Uniformed Finished ground level will be arranged by Employer (at NTP) for the area's allocated for FGD (Space for FGD mentioned in the layout drawing) Employer is requested to	Site levelling shall be done by Owner as per the levels specified in GLP in tender document. Only site clearance and minor grading is in bidder's scope.

CLARIFICATION No.01 (TECHNICAL)
Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects



Sl. No.	Specification Reference			Employer (NTPC) Specification	Bidder Requested Clarification	NTPC Clarifications
	Part	Sub-section	Clause no.			
					confirm on Bidders understanding.	
1255.	GENERAL POINT			Employers Hostels/guest house	Employer is requested to allow their existing hostels/guest house on chargeable basis.	This may not be possible, however during the execution stage the same can be discussed with our site.
1256.	SECTION – VI, PART-B	Subsection-IV-D Civil Works	39.00.00	Sand aggregate for Construction		Query is not clear.
1257.	GENERAL POINT			Topographical Survey drawing	Bidder request topographical survey drawing in Autocad format of all proposed FGD site..	Bidder to refer necessary amendment in this regard.
1258.	GENERAL POINT			Area Drainage Study report	Bidder request Owner to furnish Area Drainage Study report for planning the drainage in the area earmarked for FGD facilities of all proposed site.	Bidder to refer the revised GLP in issued amendments.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects

Sl.No	Section / Part / Chapter	Clause No.	Page No.	As per RFQ	Pre Bid Queries	NTPC Clarifications
	FGD SYSTEMS					
1625.	Section-VI Part-B SUB-SECTION-IV-D CIVIL WORKS	6.08.00	24 of 69	Access to RCC roof of Gypsum dewatering building, FGD Control room building, MCC building, Ball mill building shall be through RCC staircase, and roof access to all other buildings all shall be through cage ladder as per requirement.	Bidder understands that Gypsum Dewatering Building, FGD Control room, MCC building, Ball mill building, Slurry Recirculation pump house, Oxidation blower are RCC framed building with Brick walls. In addition No wall / Cladding shall be provided for areas where Blower, Slurry Recirculation Pumps, Dewatering equipment, Limestone Ball mill were located since these areas need maintenance access for the above equipments. However Electrical Control room, MCC room will be enclosed type with Brick walls. NTPC to confirm.	Bidder shall comply with technical specification requirement.
1626.	Section-VI Part-B Sub Sec-I-M1 (FGD)	7.07.07	28 of 51	All piping, valves & instrumentation upto the employer's terminal point shall be in the contractor's scope. Contractor shall provide the complete lime dosing system (in projects where	NTPC to furnish the size of Lime powder and inform whether the lime will be supplied in the form of bags or transported through truck.	Specification requirement is clear. Bidder shall comply with the specification requirements.

CLARIFICATION No.01 (TECHNICAL) Flue Gas Desulphurization (FGD) System Package for Lot 1A Projects

Sl.No	Section / Part / Chapter	Clause No.	Page No.	As per RFQ	Pre Bid Queries	NTPC Clarifications
	FGD SYSTEMS					
1695.	General (Project Information)	7.00.01	10 of 30	Geotechnical data and foundation system for the respective projects are enclosed at annexure- III	NTPC is requested to provide the detailed soil report near by chimney area for all projects.	Bidder to refer Foundation system and geotechnical data chapter furnished in Project information chapter.
1696.	COMMERCIAL					
1697.	Amendment no-1 to BDS (Sec-III)	ITB Clause no-26.4	1 of 1	LF Component (CIF price quoted in Schedule-1 plus CIF value of Import content of Ex-Works price included in Schedule-2) quoted by Bidder shall in no case be more than 30% of the total supply value quoted by bidder in price schedule-1 plus price schedule-2.	In view of limited suppliers for FGD equipment within India, it is presumed that these clauses are applicable for imported Bought Out items only, and imported raw materials does not fall under purview of 30% of the supply value. Therefore value of imported raw materials should be excluded and can be over and above this proposed limit of 30%. NTPC to clarify.	Bidder to refer clarifications being issued separately.
	Amendment no-1 to Technical Specification (Section-VI)	Sl.no-1	1 of 1	Government of India has launched " Make in India" initiative to transform India into a global Design and manufacturing hub. Accordingly, to promote manufacturing within India, the import content in flue gas Desulphurisation (FGD) system package has been restricted		

**Lot1A Flue Gas Desulfurization Package
Clarification No.04 (Technical)**

S.No.	Section/Part	Clause No.	Page No	Clause	Clarification	NTPC's Reply
51	CS-001.1-109(1A)-2-AMDT-05(T)	46	17 of 60	Single-flue chimney(s) shall be provided, <u>except for Tanda TPP (2X660MW) and Meila TPP (2X660MW) where twin-flue Chimney shall be provided.</u> Chimney shall be of reinforced concrete construction. There shall be one flue (liner) for each unit. The flue gas emission point for single flue chimney shall be minimum 150 meters above the plant grade level and for twin flue chimney flue gas emission point shall be minimum 220m above the plant grade level.	Bidder understands that single flue chimney is also acceptable where twin flue chimney is mentioned. NTPC to Confirm.	Bidders understanding is correct.
52	CS-001.1-109(1A)-2-AMDT-05(T)	123	49 of 60	In order to optimise power consumption of FGD system at part load operation, Bidder to provide atleast one slurry recirculation pump preferably lower level with Variable Frequency Drive (VFD).	Bidder understands that gearbox is not required to be provided for the recirculation pump with variable frequency drive. NTPC to confirm.	Bidder may decide for gearbox in case recirculation pump is with variable frequency drive.
53	CS-001.1-109(1A)-2-AMDT-05(T)	123	49 of 60	In order to optimise power consumption of FGD system at part load operation, Bidder to provide atleast one slurry recirculation pump preferably lower level with Variable Frequency Drive (VFD).	<u>NTPC to advise for the following:</u> For Nabhinagar-4x 250MW unit the Motor rating for SRC (Slurry Recirculation Pumps) pumps will be approx 550 KW and as per latest amendment bottom level of pump motor will be with VFD of 690 V as per VFD specification, and all other remaining level motors will be with 3 Phase 6.6 KV AC motor as per original tender specification, which makes different voltage levels for different levels of SRC pumps motor (i.e Bottom level SRC pump motor with 690V LT and other level motors with 6.6 KV HT). Since the voltage levels for SRC pump motors are different, this will violate the NTPC specification of (As per Clause no-5.01.00 (ii) of Sub Section-HM1 of Section-VI) <u>All slurry recirculation pumps including motors shall be of the same size and type.</u>	All slurry recirculation pumps including motors shall be of the same size and type except for VFD driven SRC pump-motor set.
54	CS-001.1-109(1A)-2-AMDT-05(T)	Electrical Annexure-E2	Clause no- 3.03.00	The voltage level for the VFD output to be fed to motor shall be as follows:- 1. Upto 400 kW : 415V/690V, Low Voltage, Three Phase AC 2. <u>Above 400kW and upto 700 KW : 690V, Low Voltage, Three Phase AC</u> 3. Above 700KW : Medium Voltage	NTPC to clarify whether VFD is required only for Positive Displacement type blowers or both Positive Displacement Blowers and Centrifugal type blowers.	VFD for positive displacement (helical lobe) type oxidation blower is mandatory, however, for centrifugal type it is optional.
55	CS-001.1-109(1A)-2-AMDT-05(T)	142 (c)	54 of 60	2x100% electric driven, single stage, integrally geared, single or dual vane centrifugal type / <u>positive displacement (helical lobe) type with VFD drive.</u> oxidation blowers complete with integral gearbox, lube oil system, instrumentation and accessories. The blower will be used for supplying a variable volume of air to the absorber reaction tank.	NTPC to clarify whether VFD is required only for Positive Displacement type blowers or both Positive Displacement Blowers and Centrifugal type blowers.	

**Lot1A Flue Gas Desulfurization Package
Clarification No.04 (Technical)**

S.No.	Section/Part	Clause No.	Page No	Clause	Clarification	NTPC's Reply
79	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 90	Page 32/60	Piping for normal , piping for emergency-pump, other piping, fittings, supports, valves and specialties.....and structural steel shed for housing various equipment of Equipment cooling water system	1) Bidder understands that bidder can place other pumps along with the ECW equipment under the same shed. 2) ECW shed shall be open on all four sides, only roof will be provided with sheeting. 3) So Ventilation will not be considered for this shed.	Ventilation is not required for shed. Further, shed is to be provided along with roof sheet as per specification requirement.
80	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 109	Page 42/60	Gypsum Dewatering System & FGD control room. Slurry recirculating pumps & Oxidation blowers shall be located in a shed provided with roof sheeting.	a) Bidder understands that only roof sheeting will be provided, no side sheeting required. b) So ventilation shall not be considered.	Ventilation is not required for shed. Further, shed is to be provided along with roof sheet as per specification requirement.
81	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 142 b	Page 58/60	As per Amendment: Bidder should provide the condensate collection system such that the condensate collected shall be routed to absorber by gravity..... common storage tank for the both the units of storage capacity of 5 m3/hr of stack condensate of both the stack shall....	1) Bidder understands the storage capacity shall be 5 m3.for the common tank (for 2 units). 2) Please confirm what will be the capacity of the tank for 3rd unit (in case of three units) shall be.	Capacity shall be same for two/three units. Min 5m3/hr.
82	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 18	7 OF 60	Gypsum Dewatering system & FGD common control room & containerised room (portable cabin) for analysers. The buildings must be complete.....	Bidder proposes to use combined ball mill and dewatering building in plants where space/layout is a challenge. Bidder requests employer to confirm the same.	We have already provided sufficient space and space challenge is very subjective statement hence bidder is requested to comply with specification requirement.
83	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 19 (b)	8 of 60	Control and monitoring of air conditioning and ventilation system shall be done from FGD control system. Control and monitoring of air conditioning and ventilation system shall be done from FGD control system.	Bidder wish to clarify that Start, stop control and important parameter monitoring shall be done from FGD control system.	Bidder's understanding is correct.
84	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 19 (c)	8 of 60	Control and monitoring of air conditioning and ventilation system shall be done from FGD control system.	Bidder wish to clarify that Start, stop control and important parameter monitoring shall be done from FGD control system.	Bidder's understanding is correct.
85	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 23	9 of 60	Interplant cabling Cables crossing Railway line (if applicable) shall be laid underground through nearest culvert. Necessary statutory clearance if required shall be taken by Bidder.	Bidder would like to use same philosophy for the pipes crossing railway line. Hence bidder requests employer to allow use of existing nearest culvert for slurry/water pipe lines also.	Bidder's request may be consider only in case there is sufficient space available and no safety issue. At this point of time it can not be confirmed. In view of this bidder to consider scope as per the specification requirement.
86	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 42	16 of 60	For industrial structures, analysis for verification of mechanism shall be carried out as per IS:1893 (Part 4):2015 for Earthquake loads.	As per IS:1893 (Part 4):2015, Bidder will carry out this analysis for verification of mechanism, only for category-1 structure (If any).	For Industrial structures, method of structural analysis (for seismic design) may be retained linear, for structure category 2 to 4.
87	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)			Single-flue chimney(s) shall be provided, except for Tanda TPP (2X660MW) and Meja TPP (2X660MW) where twin-flue Chimney shall be provided. Chimney shall be of reinforced concrete construction. There shall be one flue (liner) for each unit. The flue gas emission point for single flue chimney shall be minimum 150 meters above the plant grade level and for twin flue chimney the gas emission point shall be minimum 220m above the plant grade level. The centre to centre distance between the proposed chimney(s) and the existing chimney(s) in any direction shall not be less than 150 metres. For Barh-I (3X660MW) already existing 275m high chimneys shall be utilized with modifications as specified elsewhere in mechanical specification and hence, new chimney is not to be provided under FGD package. General Arrangement Drawing of already existing Chimneys at Barh-I are provided in Sub Section-II -A10, Part A, Section-VI for reference.	For Meja and Tanda bidder had proposed twin flue chimney in the past considering space constraint. In the latest amendment additional space have been provided by employer and it is now possible to go for single flue chimney's for each unit. Hence Bidder requests employer to allow flexibility of both options of single/twin flue chimney depending on layout.	Both options of single / twin flue chimney is allowed for Meja & Tanda.
88	AMENDMENT NO. CS-0011-109(1A)-2-AMDT-05(T)	Sl. No. 112	43 of 60	All the slurry pumps shall be provided with motorized suction and discharge valves. In addition, flushing water lines with motorized/pneumatic valves shall be shall be taken from the process water supply. The process water lines shall be provided with pneumatic/motorized valves as per the proven practice of the Bidder.	Bidder wish to clarify that all water line (like process water, equipment seal water, blow down water, clarified water, cake & belt wash water etc) shall be provided with pneumatic/motorised valves as per the proven practice of the Bidder.	Specification requirement is clear in this regard. Bidder is requested to follow the technical specification.
				1. Kudgi (3x800 MW) 9573-999-POC-F-001 Rev.8 (Civil Annex 6)	Kudgi 3X800 MW: Considering the challenge of construction in unit#1 due to space constraint, bidder requests employer to allow Commissioning/C.O.F of unit#3 first followed by Unit#2 and Unit#1 in this sequence.	Same shall be decided during detail Engineering.
				2. Lara (2x800 MW) 9548-999-POM-F-001 Rev.9 (Civil Annex 7)		
				3. Gaduanwara (2x800 MW) 9572-999-POC-F-001 Rev.7 (Civil Annex 8)		

**Lot1A Flue Gas Desulfurization Package
Clarification No.04 [Technical]**

S.No.	Section/Part	Clause No.	Page No	Clause	Clarification	NTPC's Reply
89	AMENDMENT NO. CS-0011-109(A)-2-AMDT-05(T)	Sl. No.-63	25 of 60	4. Darlipati (2x800 MW) 9549-999-POC-F-001 Rev.11 (Civil Annex 9) 5. Moudra (2x660 MW) 9561/9575-999-POC-F-001 Rev.12 6. Solapur (2x660 MW) 9571-999-POC-F-001 Rev.6 (Civil Annex 11) 7. Tanda (2x660 MW) 9562-999-POC-F-002 Rev.10 (Civil Annex 12) 8. Nabnagar JV (3x660 MW) 0370-999-PO-F-001 Rev.11 (Civil Annex 13) 9. Meja (2x660 MW) 0360/0361-999-POC-F-001 Rev.8 (Civil Annex 14) 10. Bathi (3x660 MW) 9558/9560-999-POC-F-001 Rev.9 (Civil Annex 15) 11. Nabnagar (4x250MW) 0270-999-POC-F-001 Rev. 9 (Civil Annex 16)	Nabnagar 3X660MW: Bidder requests employer to allow Space besides ESP control room of unit#1 for FGD use.	
90	AMENDMENT NO. CS-0011-109(A)-2-AMDT-05(T)	Sl. No. 136 (Mech Annexure-IV)	54 OF 60	Revised AUXILIARY POWER CONSUMPTION (PA) FOR EACH PROJECT is enclosed at Mech Annexure-IV		
91	AMENDMENT NO. CS-0011-109(A)-2-AMDT-05(T)	Sl. No. 108	41 OF 60	All the Process water tanks (Process water Storage tanks, Clarified water tank, Emergency water storage tanks etc.) shall be designed, fabricated, erected and tested in accordance with the IS: 803, latest edition. Additional Corrosion allowance of 1.5 mm on the minimum tank shell thickness as calculated by IS: 803, latest edition shall be provided by the Contractor. Tanks shall be made from IS: 2062 quality mild steel plates of tested quality. The tanks shall be of welded construction. Interior surface of the tanks shall lined with replaceable chlorobutyl/bromobutyl rubber lining of minimum 4 mm thickness or with vinyl ester based flake glass lining of minimum 3 mm thickness or Epoxy lining minimum three coats of 150 micron thickness and the outside surface shall be coated with paint as approved by the Employer. The Tanks shall be provided with drain, manholes, over flow & inlet level control valves etc.	Bidder would like to clarify that Different units have different duct lengths and as such the guaranteed power consumption shall be different. Bidder requests employer to allow declaration of unitwise power consumption guarantees in attachment 3P (Rev-01). Further Bidder requests employer to allow declaration of unitwise guaranteed limestone consumption in the same Attachment 5P Bidder understands that the total thickness of epoxy lining/paint shall be 3X50 micron = 150 micron (Total). Bidder requests employer to confirm the same.	As per the revised Auxiliary power consumption (Mechanical Annexure IV to Amendment 05(T) Bidder to quote average Auxiliary power consumption for e.g. in case of one project is having two unit then Guaranteed APC shall be average of APC of U#1 and APC of U#2. With this provision Bidder's concern is already taken care. Bidder to guarantee Limestone consumption same for all unit as it is not dependent on layout. Bidder's understanding is correct.
92	AMENDMENT NO. CS-0011-109(A)-2-AMDT-05(T)	Sl. No. 142 C 59 OF 60		2x100% electric driven, single stage, integrally geared, single or dual vane centrifugal type / positive displacement (Helical lobe) type with VFD drive, oxidation blowers complete with integral gearbox, lube oil system, instrumentation and accessories. The blower will be used for supplying a variable volume of air to the absorber reaction tank. Mandatory Spares List (For each Project) - Cl. No. 1.01.00 to 1.17.00 revised attached as Mech Annexure III Sl No 1.02.00 Gates in Flue Gas System	Bidder understands that VFD shall not be applicable for centrifugal type oxidation blower with vane control. Bidder requests employer to confirm the same.	Bidder's understanding is correct. VFD is not mandatory for centrifugal type oxidation blower
93	AMENDMENT NO. CS-0011-109(A)-2-AMDT-05(T)	Sl. No. 134	53 OF 60	1. Seals 2. Expansion Joints 3. Expansion Joints 4. Seals for guilloine gate (Both port side and bonnet side) (In case Gates are provided)		Regarding seals bidders understanding is correct. For Expansion joint, this shall be applicable for expansion joints of ducting.
94	AMENDMENT NO. CS-0011-109(A)-2-AMDT-05(T)	Sl. No. 144	59 OF 60	The absorber vessel shall be made of minimum 7 mm thick carbon steel. The absorber oxidation tank, absorber tower & absorber outlet duct up to absorber outlet flange shall be provided with 2 mm (minimum) thickness lining / cladding. Allow C276 / Alloy 59 or better material.	Bidder understand that lining here implies wall papering as allowed in original Tender. Bidder requests employer to confirm the same.	It is clarified that only cladded plate of Alloy C276/ Alloy 59 or better material with Carbon steel base is allowed. Cladded plate can be manufactured by either rolling or explosion bonding process.
95	AMENDMENT NO. CS-0011-109(A)-2-AMDT-05(T)	Sl. No. 38	14 OF 60	"SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT" shall replace the "SITE SPECIFIC SEISMIC PARAMETERS FOR DESIGN OF STRUCTURES AND EQUIPMENT" Amendment No.03 to Technical specification (Section-VI) (Amendment No. CS-0011-109(A)-2-AMDT-05(T)). Sl.No. 13, Page-8 of 102	Bidder requests employer to provide the missing bore log data for all the projects. Bidder has updated missing borelog data coordinates for each project.	All Bore log data available with NTPC for that vicinity has already been provided.



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 1 OF 22

VOLUME: II B

SECTION - D

SUB-SECTION – D1

EARTHWORK IN EXCAVATION AND BACKFILLING

SPECIFICATION NO. PE-TS-457-600-C001



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 2 OF 22

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.0	SCOPE	3
2.00.00	GENERAL	3
3.00.00	EXECUTION	6
4.00.00	TESTING AND ACCEPTANCE CRITERIA	19
5.00.00	RATES AND MEASUREMENTS	19
6.00.00	INFORMATION TO BE SUBMITTED BY THE BIDDER	20



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 3 OF 22

**STANDARD TECHNICAL SPECIFICATION FOR EARTHWORK IN
EXCAVATION AND BACKFILLING**

1.0.0 SCOPE

This specification covers earth work excavation in all types of soil, soft rock and hard rock including setting out, clearing and grubbing, shoring, dewatering, back filling around foundations/pipelines to grade, watering, compaction of fills, testing, approaches, disposal of surplus earth, protective fencing, lighting etc relevant to the structures and locations covered under this contract.

2.0.0 GENERAL

2.1.0 Work to be provided for by the Contractor

The work to be provided for by the contractor unless specified otherwise shall include but not be limited to the following.

a) Supplying and providing all labour, supervision services, earth moving machineries, surveying instruments including facilities as required under statutory labour regulations, materials, scaffolds, equipment, tools and plants, transportation, etc. required for the work.

b) Preparation and submission of working drawings showing the approaches, slopes, berms, shoring, sumps for dewatering including drainage, space for temporary stacking of soils, disposal area, fencing etc and all other details as may be required by the engineer.

c) To carry tests and submit to the Engineer, test results of fill materials and degree of soil compaction of fill whenever required by the Engineer to assess the quality of fill.

d) Design, construction and maintenance of Magazine of proper capacity for storage of explosives for blasting work and removal of the same after completion of the work etc. including procurement of necessary licenses from proper authorities.

2.2.0 Work to be provided by others

No work under this specification will be provided by any agency other than the contractor unless specifically mentioned elsewhere in the contract.



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 4 OF 22

2.3.0 Codes and Standards

All works shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes unless specified otherwise.

IS-1200	Method of measurement of building and civil engineering works, Part-I: Earthwork
IS-2720	Method of test for soils (Relevant parts)
IS-3764	Excavation work - Code of safety
IS-4081	Safety code for blasting and related drilling operations
IS-4701	Indian Standard Code of Practice for earthwork on Canals
IS:6922	Criteria for safety and design of structures subject to underground blasts
IS: 3764	Excavation work – code of safety

In case of conflict between this specification and those (IS Codes) referred to herein, the former shall prevail. In case any particular aspect of work is not covered specifically by this specification/IS Codes, any other standard practice as may be specified by the engineer shall be followed.

2.4.0 Conformity with Designs

The contractor shall carry out the work as per the approved drawings, specification and as directed by the engineer.

2.5.0 Materials

2.5.1 General

All materials required for the work shall be of the best commercial variety and approved by the engineer.

2.5.2 Material for Excavation

For the purpose of identifying the various strata encountered during the course of excavation, refer clause no. 3.4.0 for the classification of earth strata.

2.5.3 Material for Filling

Material to be used for back filling shall be free from vegetations, roots, salts, rubbish, lumps, organic matter and any other harmful chemicals etc and shall be got approved by the engineer. Normally excavated earth shall be used for back filling. In case such earth contains deleterious salts, the same shall not be used. All clods of earth shall be broken or removed. Where the excavated material is mostly rock and if filling with the same is permitted by the engineer in writing, then the filling with rock shall be done in the following



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 5 OF 22

manner. The boulders shall be broken into pieces not exceeding 150mm size in any direction and mixed with fine materials consisting of decomposed rock, moorum or any approved earth to fill the voids as far as possible and the mixture shall then be used for filling.

In case the earth required for backfilling is over and above the earth available from the compulsory excavations within the project area, then borrow areas for obtaining suitable fill material shall be arranged by the contractor himself from outside the plant boundary limits and all expenses including royalties, taxes, duties etc shall be borne by him. The selected earth from the borrow areas shall be got approved by the engineer. The borrowed material shall be free from roots, vegetations, decayed organic matter, harmful salts and chemicals, free from lumps and clods etc. The contractor shall obtain and submit necessary clearances/permissions from the concerned authorities for the borrow areas/materials acquired to the engineer.

If specified, the back filling shall be done with clean well graded sand from approved quarries free from harmful and deleterious materials.

2.6.0 Quality Control

All works shall conform to the lines, levels, grades, cross sections and dimensions shown on the approved drawings and/or as directed by the engineer. The contractor shall establish and maintain quality control for the various aspects of the work, method of construction, materials and equipments used etc. The quality control operation shall include but not be limited to the following.

Sl. No.	Activity	Check
1	Lines, levels & grades	a) By periodic surveys b) By establishing markers, boards etc
2	Back filling	(a) On quality of fill material (b) On moisture content of back fill (c) On degree of compaction achieved

2.7.0 Information regarding site conditions

Surface and Sub-surface data regarding the nature of soil, rock, sub-soil water etc. shown on drawing or otherwise furnished to the Contractor shall be taken as a guidance only and variation therefrom shall not affect the terms of the contract. The Contractor must satisfy himself regarding the character and volume of all work under this contract and expected surface, sub-surface and / or sub-soil water to be encountered. He must also satisfy himself about the general conditions of site and ascertain the existing and future construction



TITLE:
TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 6 OF 22

likely to come up during the execution of the contract so that he may evolve a realistic programme of execution.

3.0.0 EXECUTION

The contractor shall prepare and submit the detailed drawings/schemes for excavation and back filling works as proposed to be executed by him showing the dimensions as per the construction drawings and specification adding his proposal of slopes, shoring, approaches, dewatering, drainage, berms etc. for the approval of engineer.

3.1.0 Setting out

On receiving the approval from the engineer with modifications and corrections if any, the contractor shall set out the work from the control points furnished by the engineer and fix permanent points and markers for ease of periodic checking as the work proceeds. These permanent points and markers shall be fixed at the interval as prescribed by the engineer and shall be got checked and certified by the engineer after whom the contractor shall proceed with the work. It should be noted that this checking by the engineer prior to the start of the work will in no way relieve the contractor of his responsibility of carrying out the work to true lines, levels and grades as per the drawings and specification. If any errors are noticed in the contractor's work at any stage, the same shall be rectified by the contractor at his own risk and cost.

3.2.0 Initial Levels

Initial levels of the ground either in a definite grid pattern or as directed by the Engineer will be taken by the Contractor jointly with the Engineer over the original ground prior to starting actual excavation work and after setting out. These initial levels will be used for preparing cross-sections for volume measurement or for cross-checking the depths obtained from tape measurements. All records of levels, measurements etc. and also any drawing, cross-section etc. made therefrom, shall be jointly signed by the authorised representative of the contractor and the Engineer before the commencement of work and they shall form the basis of all payments in future.

3.3.0 Clearing and Grubbing

The area to be excavated shall be cleared out of fences, trees, logs, stumps, bushes, vegetation, rubbish, slush etc. Trees upto 300mm girth shall be uprooted. Trees above 300mm girth to be cut shall be approved by the engineer and marked. Cutting of trees shall include removing roots as well. After the tree is cut and roots taken out, the pot holes formed shall be filled with good earth in 250mm layers and compacted unless directed otherwise by the engineer. The trees shall be cut in to suitable pieces as instructed by the



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 7 OF 22

engineer. Before earthwork is started, all the spoils, unserviceable materials and rubbish shall be burnt or removed and disposed to the approved disposal area(s) as specified by the engineer. Useful materials, saleable timber, fire woods etc shall be the property of the owner and shall be stacked properly at the worksite in a manner as directed by the engineer.

3.4.0

Classification

All earthwork shall be classified under the following categories:

No distinction will be made whether the material is dry or wet.

a) Ordinary Soil

This shall comprise vegetable or organic soil, turf, sand, silt, loam, clay, mud, peat, black cotton soil, soft shale or loose moorum, a mixture of these and similar material which yields to the ordinary application of pick and shovel, rake or other ordinary digging implement. Removal of gravel or any other nodular material having diameter in any one direction not exceeding 75 mm occurring in such strata shall be deemed to be covered under this category.

b) Hard Soil

This shall include :

- i) stiff heavy clay, hard shale, or compact moorum requiring grafting tool or pick or both and shovel, closely applied ;
- ii) gravel and cobble stone having maximum diameter in any one direction between 75 and 300 mm ;
- iii) soling of roads, paths, etc., and hard core ;
- iv) macadam surfaces such as water bound, and bitumen/tar bound;
- v) lime concrete, stone masonry in lime mortar and brick work in lime/cement mortar, below ground level ;
- vi) soft conglomerate, where the stones may be detached from the matrix with picks ; and
- vii) generally any material which requires the close application of picks, or scarifiers to loosen and not affording resistance to digging greater than the hardest of any soil mentioned in (i) and (vi) above.

c) Soft and Decomposed Rock

This shall include :

- i) limestone, sandstone, laterite, hard conglomerate or other soft or disintegrated rock which may be quarried or split with crowbars ;
- ii) unreinforced cement concrete which may be broken up with crowbars or picks and stone masonry in cement mortar below ground level ;
- iii) boulders which do not require blasting having maximum diameter in any direction of more than 300 mm, found lying loose on the surface or embedded



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 8 OF 22

in river bed, soil, talus, slope wash and terrace material of dissimilar origin ;
and

iv) any rock which in dry state may be hard, requiring blasting, but which
when wet becomes soft and manageable by means other than blasting.

d) Hard Rock (requiring blasting)

This shall include :

- i) any rock or cement concrete for the excavation of which the use of
mechanical plant or blasting is required ;
- ii) reinforced cement concrete (reinforcement cut through but not separated
from the concrete) below ground level; and
- iii) boulders requiring blasting.

e) Hard Rock (blasting prohibited)

Hard rock requiring blasting as described under (d) but where blasting is
prohibited for any reason and excavation has to be carried out by chiselling,
wedging or any other agreed method.

In case of any dispute regarding classification, the decision of the
Engineer shall be final.

3.5.0 Excavation for Foundations and Trenches

3.5.1 General

All excavation shall be done to the minimum dimensions as required for the
safety and working facility. In each individual case, the contractor shall obtain
prior approval of the engineer for the method he proposes to adopt for the
excavation including dimensions, side slopes, shoring, dewatering, drainage
and disposal etc. This approval however shall not in any way make the
engineer responsible for any consequent loss or damage. The excavation must
be carried out in the most expeditious and efficient manner. All excavation in
open cuts shall be made true to the line, slopes and grades as shown on the
drawings and/or as directed by the engineer. No material shall project within
the dimension of minimum excavation lines marked. Boulders (if any)
projecting out of the excavated surfaces shall be removed if they are likely to
be a hindrance to the work/workers in the opinion of the engineer.

Method of excavation shall in every case be subject to the approval of the
engineer. The contractor shall ensure the stability and safety of the excavation,
adjacent structures, services and works etc including the safety of the
workmen. If any slip occurs, the contractor shall remove all the slipped
materials from the excavated pit without any extra cost to the engineer/owner.
All loose boulders and semi detached rocks which are not inside but so close
to the area to be excavated and may liable to fall or otherwise endanger the



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 9 OF 22

workmen, equipment of the work etc during excavation in the opinion of the engineer shall be stripped off and removed away from the area of excavation. The method to be used for removal shall be such that it should not shatter or render unstable or unsafe the portion which was originally sound and safe. In case any material not required to be removed initially but later to become loose or unstable in the opinion of the engineer shall also be promptly and satisfactorily removed.

The rough excavation may be carried out upto a maximum depth of 150 mm above the final level. The balance shall be excavated with special care. If directed by the engineer, soft and undesirable spots shall be removed even below the final level. The extra excavation shall be filled up as instructed by the engineer. If the excavation (in all types of soil and rock) is done to a depth greater than that shown on the drawing or as directed by the engineer, the excess depth up to the required level shall be filled with cement concrete not leaner than 1:4:8 or richer as directed by the engineer at the own risk and cost of the contractor. In case where excavation in soil, soft rock (including weathered rock) and hard rock are involved, the excavation in each stratum shall be carried out separately with the approved methodology and as per the instructions of the engineer.

All excavated materials such as rock, boulders, bricks, dismantled concrete blocks etc shall be the property of the owner and shall be stacked separately as directed by the engineer. All gold, silver, oil, minerals, archeological and other findings of importance, trees cut or other materials of any description and all precious stones, coins, treasures, relics, antiquities and other similar things which may be found in or upon the site shall be the property of the owner and the contractor shall duly preserve the same to the satisfaction of the engineer/owner. The contractor shall deliver the same to such person or persons as may be authorized or appointed from time to time by the owner to receive the same.

Prior to starting the excavation, the ground level at the location shall be checked jointly with the engineer.

3.5.2

Excavation in All Type of Soil and in Soft Rock

The excavation in all type of soil, soft rock including decomposed rock etc shall be carried out as per the approved proposal and as directed by the engineer. The work shall be carried out in a workmanlike manner without endangering the safety of nearby structures/services or works and without causing hindrance to any other activities in the area. Foundation pits shall not be excavated to the full depth unless construction is imminent. The last 150mm depth shall be excavated once concreting work is imminent. At the discretion of the engineer, the full depth may be excavated and the bed be covered with lean concrete as specified after watering and compacting the bed. As the excavation reaches the required dimensions, lines, levels and grades



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 10 OF 22

etc, the work shall be got checked and approved by the engineer. In cases where deterioration of the ground, upheaval, slips etc are expected, the engineer may order to suspend the work at any stage and instruct the contractor to carry out the protection works before the excavation will be restarted.

3.5.3 Excavation in Hard Rock

Hard rocks shall normally be excavated by means of blasting. In case where blasting is prohibited for any reasons, the excavation shall be carried out by chiselling or any other approved method as directed by the engineer. Personnel deployed for rock excavation shall be protected from all hazards such as loose rock/boulder rolling down and from general slips of excavated surfaces. Where the excavated surface is not stable against sliding, necessary supports such as props, bracings or bulkheads shall be provided and maintained during the period of construction. Where the danger of falling loose rock/boulder from the excavated surfaces deeper than 2m exist, steel mesh anchored to the lower edge of the excavation and extending over and above the rock face adequate to retain the dislodged material shall be provided and maintained.

3.5.4 Blasting

Storage, handing and use of explosives shall be governed by the current explosive rules/regulations laid down by the Central and the State Governments. The contractor shall ensure that these rules/regulations are strictly adhere to. The following instructions are also to be strictly followed and the instructions wherever found in variance with the above said rules/regulations, the former (instructions) shall be superseded with the later (above said rules/regulations).

No child under the age of 16 and no person who is in a state of intoxication shall be allowed to enter the premises where explosives are stored nor they shall be allowed to handle the explosives. The contractor shall obtain licence from the District Authorities for undertaking the blasting work as well as for obtaining and storing the explosives as per Explosives Rules, 1940 corrected upto date. The contractor shall purchase the explosives, fuses, detonators etc only from a licensed dealer and shall be responsible for the safe custody and proper accounting of the explosive materials. The engineer or his authorized representative shall have the access to check the contractor's store of explosives and his accounts at any time. It is the full responsibility of the contractor to transport the explosives as and when required for the work in a safe manner to the work spot.

Further, the engineer may issue modifications, alterations and new instructions to the contractor from time to time. The contractor shall comply with the same without these being made a cause for any extra claim.



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 11 OF 22

3.5.4.1 Materials

All materials such as explosives, detonators, fuses, tamping materials etc proposed to be used in the blasting operation shall have the prior approval of the engineer. Only explosives of approved make and strength are to be used. The fuses known as instantaneous fuse must not be used. The issue of fuse with only one protective coat is prohibited. The fuse shall be sufficiently water resistant as to be unaffected when immersed in water for 30 minutes. The rate of burning of the fuse shall be uniform and shall be not less than 4 seconds per inch of length with 10% tolerance on either side. Before use, the fuse shall be inspected. Moist, damaged or broken ones shall be discarded. When the fuses are in stock for long, the rate of burning of fuses shall be tested before use. The detonators shall be capable of giving an effective blasting of the explosives. Moist and damaged detonators shall be discarded.

3.5.4.2 Storage of Explosives

The current Explosive Rules shall govern the storage of explosives. Explosives shall be stored in a clean, dry and well ventilated magazine to be specially built for the purpose. Under no circumstances should a magazine be erected within 400m of the actual work site or any source of fire. The space surrounding the magazine shall be fenced and the ground inside shall be kept clear and free from trees, bushes etc. The admission to this fenced space shall be through a single gate only and no person shall be allowed without the permission of the officer-in-charge. The clear space between the fence and the magazine shall not be less than 90m. The magazine shall be well drained. Two lightning conductors, one at each end shall be provided to the magazine. The lightning conductors shall be tested once in every year.

Explosives, fuses and detonators shall each be separately stored. Cases of explosives must be kept clear of the walls and floors for free circulation of air on all sides. Special care shall be taken to keep the floor free from any grains of explosives. Cases containing explosives shall not be opened inside the magazine and the explosives in open cases shall not be received into a magazine. Explosives which appear to be in a damaged or dangerous condition are not to be kept in any magazine but must be removed without delay to a safe distance and be destroyed.

Artificial light, matches, inflammable materials, oily cotton, rag waste and articles liable to spontaneous ignition shall not be allowed inside the magazine. Illumination shall be obtained from an electric storage battery lantern. No smoking shall be allowed within 100m distance from any magazine.

Magazine shoes without nails shall be used while entering the magazine. The persons entering the magazine must put on the magazine shoes which shall be



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 12 OF 22

provided at the magazine for this purpose and should be careful

- * not to put their feet on the clean floor unless the magazine shoes on.
- * not to touch the magazine shoes on ground outside the clean floor.
- * not to allow any dirt or grit to fall on the clean floor.

Persons with bare feet shall dip their feet in water before entering the magazine and then step directly from the tub to the clean floor. No person having article of steel or iron with/on him shall be allowed to enter the magazine. Workmen shall be examined before entering the magazine to check none of the prohibited articles are with them. A brush broom shall be kept in the lobby of the magazine for cleaning the magazine. Cleaning shall be done immediately after each occasion whenever the magazine is opened for receipt, delivery or inspection of the explosives.

The mallets, levers, wedges etc for opening the barrels or cases shall be of wood. The cases of explosives are to be carried by hand and shall not be rolled or dragged inside the magazine. Explosives which have been issued and returned to the magazine are to be issued first; otherwise those which have been stored long in the store are to be issued first. Neither the magazine shall be opened nor any person shall be allowed in the vicinity of the magazine during any dust storm or thunderstorm. All magazines shall be officially inspected at definite intervals and a record of such inspections shall be kept.

3.5.4.3 Carriage of Explosives

Detonators and explosives shall be transported separately to the blast site. Explosives shall be kept dry and away from direct rays of the sun, artificial lights, steam pipes or heated metal and other sources of heat. Before explosives are removed, each case or package shall be carefully examined to ascertain that it is properly closed and shows no sign of leakage.

No person except the driver shall be allowed to travel on the vehicle conveying explosives. No explosive shall be transported in a carriage or vessel unless all iron or steel therein the carriage or vessel which are likely to contact the package containing explosives are effectually covered with lead, leather, wood, cloth or any other suitable material. No light shall be carried on the vehicle carrying explosives and no operation connected with the loading, unloading and handling of explosives shall be conducted after sunset.

3.5.4.4 Use of Explosives

The contractor shall appoint an agent who shall personally superintend the firing and all operations connected therewith. The contractor shall satisfy himself that the person so appointed is fully acquainted with his



TITLE:
TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 13 OF 22

responsibilities.

Holes for charging the explosives shall be drilled with pneumatic drills and the drilling pattern shall be so planned that the rock pieces after blasting will be suitable for handling. The hole diameter shall be of such a size that the cartridges can easily pass down through them and any undue force is not required during charging. Charging operation shall be carried out by or under the personal supervision of the shot firer. Wrappings shall never be removed from the explosive cartridges. Only one cartridge at a time shall be inserted in a hole and wooden rods shall only be used for loading and stemming the shot holes. Only such quantities of explosives as are required for a particular work shall be brought to the work site. Should any surplus remain when all the holes have been charged shall be carefully removed to a point at least 300m away from the firing point.

The authorized shot firer himself shall make all the connections. The shot firing cable shall not be dragged along the ground to avoid any damage to the insulation. The shot firing cable shall be tested each time for its continuity and possible short circuiting. The shot firer shall always carry the exploder handle with him until he is ready to fire shots. The number of shots fired at a time shall not exceed the permissible limits. Before any blasting is carried out it shall be ensured that all workmen, vehicles and equipment on the site are cleared from an area of minimum 300m radius from the firing point or as required by the statutory regulations at least 10 minutes before the time of firing by sounding a warning siren and the area shall be encircled by red flags.

The explosives shall be fired by means of an electric detonator placed inside the cartridge. For simultaneous firing of a number of charges, the electric detonators shall be connected with the exploder through the shot firing cable in a simple series circuit. Due precautions shall be taken to keep the firing circuit insulated from the ground, bare wires, rails, pipes or any other path of stray current etc and keep the lead wires short circuited until it is ready to fire. Any kink in the detonator leading wire shall be avoided. For simultaneous firing of a large number of shot holes, use of cordtex may be done. An electric detonator attached to its side with adhesive tape shall initiate cordtex connecting wire or string. Blasting shall only be carried out at certain specified times to be agreed jointly by the contractor and the engineer.

At least five minutes after the blast has been fired in case of electric firing or as stipulated in the regulations, the authorized shot firer shall return to the blast area and inspect carefully the work and satisfy himself that all the charged holes have exploded. Cases of misfired unexploded charges shall be exploded by drilling a parallel fresh hole at a distance of not less than 600mm from the misfired hole and by exploding a new charge. The authorized shot firer shall be present during the removal of debris as it may contain unexploded explosives near the misfired hole. The workmen shall not return to the site of firing until at least half an hour after firing.



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 14 OF 22

Where blasting is to be carried out in proximity of other structures, controlled blasting by drilling shallow shot holes and proper muffling arrangements with steel plates loaded with sand bags etc shall be used on top of the blast holes to prevent the rock fragments from causing any damage to the adjacent structures and other properties. Adequate safety precautions as per building byelaws, safety codes, statutory regulations etc shall be taken during blasting operations.

3.5.4.5 Restrictions in Blasting

- a) Blasting which may disturb or endanger the stability, safety or quality of the adjacent structures/foundations shall not be permitted.
- b) Blasting within 200m of a permanent structure or construction work in progress shall not be permitted.
- c) Progressive blasting shall be limited to two third of the total remaining depth of excavation.
- d) No large scale blasting operations will be resorted to when the excavation reaches the last one metre and only small charge preferably black powder may be allowed so as not to shatter the parent rock.
- e) The last blast shall not be more than 0.50 m in depth.
- f) In rocky formations, at locations where specifically indicated or ordered in writing by the engineer, the use of explosives shall be discontinued and excavation shall be completed by chiselling or any other suitable method as approved by the engineer.

3.5.5 Disposal

The excavated spoils shall be disposed of in any (or all) of the following manner as directed by the engineer.

- a) By using it straightway for backfilling.
- b) By stacking it temporarily to use for backfilling at a later date during execution of the contract.
- c)
 - i) By either spreading
 - or
 - ii) By spreading and compacting at designated disposal areas.
- a) By selecting the useful material and stacking it neatly in designated areas as indicated by the engineer for use in backfilling by some other agency.

3.5.6 Disposal of Surplus Materials

All surplus material from excavation shall be removed and disposed of from the excavation site to the designated disposal area indicated by the engineer.



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 15 OF 22

All good and sound rocks obtained from excavations and all assorted materials of dismantled structures are the property of the owner and if the contractor wants to use it, he shall have to obtain it from the engineer at a mutually agreed rate. All sound rocks and other assorted materials like excavated bricks etc shall be stacked separately.

3.5.7 Protection

The contractor shall notify the engineer as soon as the excavation is expected to be completed within a day so that he shall inspect it at the earliest. Immediately after approval of the engineer, the excavation must be covered up in a shortest possible time. But in no case the excavation shall be covered up or worked on before approval by the engineer. Excavated material shall be placed 1.5m or half the depth (of excavation) whichever is more from the edge of the excavation or further away if directed by the engineer. Excavation shall not be carried out below the foundation level of the structure close by until the required precautions are taken. Adequate fencing is to be made enclosing the excavation. The contractor shall protect all the underground services exposed during excavation. All existing surface drains in the work area shall be suitably diverted by the contractor before taking up excavation to maintain the working area neat and clean.

3.5.8 Dealing with Surface Water

All working areas shall be kept free of surface water as far as reasonably practicable. Works in the vicinity of cut areas shall be controlled to prevent the ingress of surface water.

No works shall commence until surface water streams have been properly intercepted , redirected or otherwise dealt with.

Where works are undertaken in the monsoon period, the Contractor may need to construct temporary drainage systems to drain surface water from working areas.

3.5.9 Dewatering

All excavation shall be kept free of water and slush. Grading in the vicinity shall be controlled to prevent the surface water running into the excavations. The contractor shall remove any water inclusive of rain water and subsoil water etc accumulated in the excavation by pumping or other means as approved by the engineer and keep the excavations dewatered and/or lower the subsoil water level to 300mm below the founding level until the construction of foundation and backfilling are completed in all respects.

Sumps made for dewatering must be kept clear of the foundations. The engineer's prior approval on the method of pumping to be adopted shall be



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 16 OF 22

taken; but in any case, the pumping arrangement shall be such that there shall be no movement or blowing in of subsoil due to the differential head of water during pumping.

3.5.10 Timber Shoring

Close or open type timber shoring as approved by the engineer depending on the nature of sub-soil, depth of pit or trench and the type of timbering shall be adopted. Timbers made out of approved quality shall only be used. It shall be the responsibility of the contractor to take all necessary steps to prevent the sides of trenches and pits from collapsing.

3.5.10.1 Close Timbering

Close timbering shall be done by completely covering the sides of the trenches and pits generally with short, upright members called "polling boards". These shall be of 250mm wide(min.) and 40mm thick(min.) sections as directed by the engineer. The boards shall generally be placed vertically in pairs, one on each side of the cut and shall be kept apart (maximum spacing is limited to 1.20m) by horizontal walers of strong wood cross strutted with wooden struts or as directed by the engineer. The length of wooden struts shall depend on the width of the trench or pit.

In case where the soil is very soft and loose, the boards shall be placed horizontally against the sides of excavation and supported by vertical walers which shall be strutted to similar timber pieces on the opposite face of the trench or pit. The lowest board supporting the sides shall be taken into the ground. No portion of the vertical side of the trench or pit shall remain exposed to avoid any slipping out of earth.

The withdrawal of the timber shall be done very carefully to prevent the collapse of the pit or trench. It shall be started from one end and proceeded systematically to the other end. Concrete or masonry shall not be damaged during the removal of the timber. No claim shall be entertained for any timber which cannot be withdrawn and is lost or buried.

3.5.10.2 Open Timbering

In case of open timbering, vertical board of 250mm wide(min.) and 40mm thick(min.) shall be spaced sufficiently apart to leave unsupported strips of maximum 500mm average width. The detailed arrangement, size of timber and the spacing etc shall be subjected to the approval of the engineer. In all other respects, the specification for close timbering shall apply to open timbering as well.



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION - D1

REV.NO. 0 DATE 20/12/2019

SHEET 17 OF 22

3.6.0 Treatment of Slips

The contractor shall take all precautions to avoid high surcharges and provide proper surface drainage to prevent flow of water over the sides of the excavations. These precautions along with proper slopes, berms, shoring and control of ground water should cause no slips to occur. If however slips still occur, the same shall be removed by the contractor with his own risk and cost.

3.7.0 Backfilling

3.7.1 General

The material to be used for backfilling shall be approved by the engineer which shall be obtained directly from the excavation, from the nearby areas where excavation work by the same agency is in progress, from the temporary stacks of excavated spoils or from the borrow pits as directed by the engineer. The material shall be free from lumps and clods, roots and vegetations, harmful salts and chemicals, organic materials etc.

In locations where sand filling is required, the sand used should be clean, well graded and be of the quality normally acceptable for use in concrete.

3.7.2 Filling and Compaction in Pits and Trenches all Around the Structures

As soon as the work in foundation has been accepted, the spaces around the foundation in pits and trenches shall be cleared of all debris, brick bats, mortar droppings etc and filled with approved earth in layers not exceeding 250mm (in loose thickness). Each layer(loose) shall be watered, rammed and properly compacted to the required degree to the satisfaction of the engineer. Earth shall be compacted with approved mechanized compaction machine. Usually, no manual compaction shall be allowed unless specifically permitted by the engineer. The moisture content of the fill material during compaction shall be controlled near to its optimum moisture content so as to obtain the required degree of compaction. The final surface shall be trimmed and levelled to proper profile as desired by the engineer.

3.7.3 Plinth Filling

The plinth shall be filled with earth in layers not exceeding 250mm (in loose thickness) and each layer shall be watered and compacted to the required degree with approved compaction machine or manually if specifically permitted by the engineer. When the filling reaches the finished level, the surface shall be flooded with water for at least 24 hours, allowed to dry and then rammed and compacted in order to avoid any settlement at a later stage. The finished surface of fill shall be trimmed to the slope intended to be provided for the floor.



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION - D1

REV.NO. 0 DATE 20/12/2019

SHEET 18 OF 22

3.7.4 Filling in Trenches for Water Pipes and Drains

Filling in trenches for pipes and drains shall be commenced as soon as the joints of pipes and drains have been tested and passed. Where the trenches are excavated in soil, the filling shall be done with earth on the sides and top of pipes in layers not exceeding 150mm, watered, rammed and compacted taking care that no damage is caused to the pipe below.

In case of trenches excavated in rock, the filling upto a height of 300mm or the diameter of the pipe whichever is more above the crown of the pipe or barrel shall be done with fine material such as earth, moorum, disintegrated rock or ash as per the availability at site and shall be filled in compacted layers not exceeding 150mm. The remaining filling shall be done in layers with the mixture of boulders (of size not exceeding 150mm) and fine material as specified elsewhere in the specification. Each layer shall be watered, rammed and compacted to the required degree and to the satisfaction of the engineer.

3.7.5 Filling in Disposal Area

Surplus materials from excavation which are not required for backfilling shall be disposed of in the designated disposal areas. The spoils shall not be dumped haphazardly but should be spread in layers approximately 250mm thick when loose, watered and compacted with the help of a compacting equipment as per the directions of the engineer. In wide areas, rollers shall be employed and compaction shall be done to the satisfaction of the engineer at the optimum moisture content which shall be checked and controlled by the contractor. In certain cases the engineer may direct the contractor to dispose the surplus materials without compaction which can be done by tipping the spoils from a high bench neatly maintaining a proper level and grade of the bench.

3.8.0 Approaches and Fencing

The contractor should provide and maintain proper approaches for the workmen and inspection. The roads and approaches around the excavation should be kept clear at all times so that there is no hindrance to the movement of men, material and equipment of various agencies connected with the project. Sturdy and elegant fencing is to be provided around the top edge of the excavation as well as around the bottom of the fill at the surplus disposal area where dumping from a high bench is in progress.

3.9.0 Lighting

Full scale area lighting is to be provided if night work is permitted or directed by the engineer. If no night work is in progress, red warning lights should be provided at the corners of the excavated pit and the edges of the fill.



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 19 OF 22

4.0.0 TESTING AND ACCEPTANCE CRITERIA

4.1.0 Excavation

On completion of excavation, the dimension of the pits will be checked as per the drawings after the pits are completely dewatered. The work will be accepted after all undercuts have been set right and all over excavations are filled back to the required lines, levels and grades by placing ordinary cement concrete of 1:4:8 proportion and/or richer and/or by compacted earth as directed by the engineer. The choice of the grade of concrete will be a matter of unfettered discretion of the engineer. Over excavation of the sides shall be made good by the contractor while carrying out the backfilling. The excavation work will be accepted after the above requirements are fulfilled and all the temporary approaches encroaching inside the excavation have been removed.

4.2.0 Backfilling

The degree of compaction required will be as per the stipulation laid down in IS: 4701 and the actual method of measuring the degree of compaction will be as decided by the engineer. The work of back filling will be accepted after the engineer is satisfied with the degree of compaction achieved.

5.0.0 RATES AND MEASUREMENTS

5.1.0 Rates

a) The item of work in the schedule of quantities describe the work very briefly. The various items of the schedule of quantities shall be read in conjunction with the corresponding section in the technical specification including amendments and additions if any. For each item in the schedule of quantities, the bidder's rate shall include all the activities covered in the description of the items as well as for all necessary operations in detail as described in the technical specification.

b) No claims shall be entertained if the details shown on the released for construction drawings differ in any way from those shown on the tender drawings.

c) The unit rate quoted shall include minor details which are obviously and fairly intended and which may not have been included in these documents but are essential for the satisfactory completion of the work.

d) The bidder's quoted rate shall be inclusive of supplying and providing all labour, men, materials, equipments, tools and plants, supervision, services, approaches, schemes etc.



TITLE:
TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 20 OF 22

e) In case blasting in hard rock is envisaged, the unit rate quoted for earth work shall include the cost of storage and safety arrangements for the materials required for blasting. No separate payment will be made on this account.

5.2.0 Measurements

Method of measurements are specified as below:

a) The length, breadth and depth shall be measured correct to the nearest centimeter if measurements are taken by tape. Rounding of numerical shall be as per relevant IS Codes. If the measurements are taken with staff and level, the levels shall be recorded correct to 5mm. The area and volume shall be worked out in square meter and cubic meter respectively correct to the nearest of two decimal places.

b) For earth work in excavation, the ground levels shall be taken before and after completion of the work in the actually excavated area. The quantity of earth work in excavation shall be computed from these levels in cubic meter.

c) In case of open footings (rafts/ pilecaps/ drains/ cable trench/ pipe trench/ sub soil beams etc.) up to the depth of 2.0 metres from ground level, around excavation of 30 cm beyond the outer dimension of footing (not the PCC dimension below footing) shall be measured for payment to make allowances for centering and shuttering. Any additional/excess excavation beyond this limit shall be at the risk and cost of the contractor and shall not be measured for payment for item of work on excavation, backfilling, carriage, dewatering etc. Required shoring & strutting, side slopes, benching, dewatering sump pits, approaches to the excavated pit etc. are deemed to be included in the quoted rates in the schedule of quantities.

d) In case of open footings (Rafts/ pilecaps / drains/ cable trench/ pipe trench/ sub soil beams etc.) at a depth of more than 2.0 metre from ground level, around excavation of 75 cm beyond the outer dimension of footing (not the PCC dimension below footing) shall be measured for payment to make allowances for centering and shuttering. Any additional/excess excavation beyond this limit shall be at the risk and cost of the contractor and shall not be measured for payment for item of work on excavation, backfilling, carriage, dewatering etc. Required shoring & strutting, side slopes, benching, dewatering sump pits, approaches to the excavated pit etc. are deemed to be included in the quoted rates in the schedule of quantities.

e) Where soft rock and hard rock are mixed, the measurement shall be done as follows. The two types of rock shall be stacked separately and measured in stacks. The net quantity of each type of rock shall be so arrived by applying a



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 21 OF 22

deduction of 50% for looseness/voids in the stacks. If the sum of net quantity of the two types of rock so arrived exceeds the total quantity of excavation, then the quantity of each type of rock shall be worked out from the total quantity (from excavation) in the ratio of net quantities in stack measurements of the two types of rock. If stacking is not feasible, the method as suggested by the engineer shall be followed.

f) Where soil, soft rock and hard rock are mixed, the measurement shall be done as follows. The soft and hard rock shall be removed from the excavated material and stacked separately and measured in stacks. The net quantity of each type of rock shall be so arrived by applying a deduction of 50% for looseness/voids in stacks. The difference between the entire excavation and the sum of the quantities of soft and hard rock so arrived shall be taken as soil.

g) The authorized quantity (calculated on the basis of authorized width/working space under clause no. 5.2.0 c & 5.2.0 d) or those actually excavated, whichever, are less, shall be measured for payment.

h) Tree cutting having girth more than 300mm shall be measured in number and are separately payable as deemed not covered in excavation items of work in the schedule of quantities.

6.0.0 INFORMATION TO BE SUBMITTED BY THE BIDDER

6.1.0 With Tender

Detail of equipments and machineries proposed to be used for excavation, backfilling and compaction shall be submitted along with the tender.

6.2.0 After Award

After award of the contract the successful bidder shall submit the following for approval.

a) Within 30 days of the award of contract, the contractor shall submit a detailed programme of the work as proposed to be executed giving completion dates of excavation for the various foundations and the time required for backfilling and compaction after completion of foundation for the structures. The earthwork programme shall be planned in accordance with the foundation programme. The programme should also show how the excavation and backfilling quantities will be balanced minimizing the temporary stacking of



TITLE:
**TECHNICAL SPECIFICATION FOR
EARTHWORK IN EXCAVATION AND
BACKFILLING**

SPECIFICATION NO. PE-TS-457-600-C001

VOLUME - II B

SECTION - D | SUB-SECTION – D1

REV.NO. 0 DATE 20/12/2019

SHEET 22 OF 22

spoils. It is to be noted that the engineer even after initial approval of the programme may instruct the contractor to enhance or to retard the progress of work during the actual execution in order to match with the progress of foundations. The initial programme being submitted by the contractor should have sufficient flexibility to take care of such reasonable variations.

b) Within 15 days of the award of contract, the contractor shall submit the drawings for earth work in excavation and backfilling showing detail of slopes, shoring, approaches, sump pits, dewatering lines, fencing etc for the approval of the engineer.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 1 OF 56

**VOLUME – II B
CIVIL, STRUCTURAL & ARCHITECTURAL WORKS**

SPECIFICATION NO. PE-TS-457-600-C002

SECTION – D

SUB SECTION – D2

GENERAL TECHNICAL SPECIFICATION

CEMENT CONCRETE (PLAIN & REINFORCED)



**Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301**



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 2 OF 56

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	GENERAL	3
3.00.00	INSTALLATION	12
4.00.00	SAMPLING AND TESTING	41
5.00.00	ACCEPTANCE CRITERIA	43
6.00.00	RATES AND MEASUREMENTS	43
7.00.00	LIST OF I.S.: CODES AND STANDARDS FOR REFERENCE	51



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 3 OF 56

SUB-SECTION – D2

CEMENT CONCRETE (PLAIN & REINFORCED)

1.00.00 SCOPE

1.01.00 General

This specification covers all the requirements, described hereinafter for general use of Plain and Reinforced Cement Concrete work in Structures and locations, cast-in-situ or precast, and shall include all incidental items of work not shown or specified but reasonably implied or necessary for the completion of the work. Special requirements for structures such as reinforced concrete chimney, cooling towers, etc. have been covered under the respective specifications. Those specifications shall be used in conjunction with this specification.

1.02.00 IS: 456 shall form a part of this specification and shall be complied with unless permitted otherwise. For any particular aspect not covered by this Code, appropriate Code, specifications and/or replacement by any International code of practice as may be specified by the Engineer shall be followed. All codes and Standards shall conform to its latest revisions. A list of IS codes and Standards is enclosed hereinafter for reference. However, should the list be not exhaustive and does not cover any aspect of the work, then relevant Indian and, in its absence, relevant International code shall apply.

2.00.00 General

2.01.00 Work to be provided for by the Contractor

The work to be provided for by the Contractor, unless otherwise specified shall include but not be limited to the following

- a) Furnish all labour, supervision, services including facilities as may be required under statutory labour regulations, materials, forms, templates, supports, scaffolds, approaches, aids, construction equipment, tools and plants, transportations, etc. required for the work.
- b) Prepare Bar bending Schedules for reinforcement bars showing the positions and details of spacers, supports, chairs, hangers etc.
- c) Prepare working drawings of formworks, scaffolds, supports, etc.
- d) Prepare shop drawings for various inserts, anchors, anchor bolts, pipe sleeves, embedments, hangers, openings, frames etc.
- e) Prepare detailed drawings of supports, templates, hangers, etc. required for



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 4 OF 56

installation of various embedments like inserts, anchor bolts, pipe sleeves, frames, joint seals, frames, openings etc.

As decided by the Engineer some or all of the drawings & schedules prepared under item (b) to (e) above will have to be submitted for approval.

- f) Submit for approval detailed schemes of all operations required for executing the work, e.g. material handling, Concrete mixing, Placement of concrete, Compaction, curing, services, Approaches, etc.
- g) Design and submit for approval concrete mix designs required to be adopted on the job.

Furnish samples and submit for approval results of tests of various properties of the following:

- i) The various ingredients of concrete
- ii) Concrete
- iii) Embedments
- iv) Joint seals
- i) Provide all incidental items not shown or specified in particular but reasonably implied or necessary for successful completion of the work in accordance with the drawings and specifications.
- j) For supply of certain materials normally manufactured by specialist firms, the Contractor may have to produce, if directed by the Engineer, a guarantee in approved Performa for satisfactory performance for a reasonable period as may be specified, binding both the manufacturers and the Contractor, jointly and severally.

2.02.00 Work by others

No work under this specification will be provided by any agency other than the Contractor unless specifically mentioned elsewhere in the contract.

2.03.00 Information to be submitted by the Tenderer

2.03.01 With Tender

The following technical information's are required with the tender:

- a) Source and arrangement of processing of aggregates proposed to be adopted.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 5 OF 56

- b) Type of plant and equipment proposed to be used.
- c) Names of firms with which association is sought for to execute the special items of work in the contract.
- d) Types of formwork proposed to be used.

2.03.02 After Award

The Contractor shall submit the following information and data including samples where necessary, progressively during the execution of the contract.

a) Programme of Execution

Within 30 days of the award of contract, the Contractor will submit a Master Programme for completion of the work.

This Master Programme may have to be reviewed and updated by the Contractor, quarterly or at more frequent intervals as may be directed by the Engineer depending on the exigencies of the work.

Detailed day-to-day Programme of every month is to be submitted by the Contractor before the end of the previous month.

b) Samples

Samples of the following materials and any other materials proposed to be used shall be submitted as directed by the Engineer, in sufficient quantities free of cost, for approval. The Engineer for future reference will preserve approved samples. The approval of the Engineer shall not, in any way, relieve the Contractor of his responsibility of supplying materials of specified qualities:

- i) Coarse and fine aggregates.
- ii) Admixtures.
- iii) Plywood for Formwork.
- iv) Embedded and anchorage materials as may be desired by the Engineer.
- v) Joint sealing strips and other*waterproofing materials.
- vi) Joint filling compounds.
- vii) Foundation quality Rubber Pads.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 6 OF 56

c) Design Mix

Design mix as per specification giving proportions of the ingredients, sources of aggregates and cement, along with test results of trial mixes as per relevant I.S., is to be submitted to the Engineer for his approval before it can be used on the works.

d) Bar Bending Schedules

Bar Bending Schedules in accordance with Clause 2.01.00 (b) and 3.16.01 of this specification.

e) Detailed Drawings and Designs of Formworks to be used

Detailed design data and drawings of standard formworks to be used as per clause 2.01.00 (c).

f) Detailed Drawings for Templates & Temporary Supports for embedment
As per Clause 2.01.00 (e).

g) Mill Test Reports for Cement & Reinforcing Steel.

h) Inspection Reports

The Engineer in accordance with Clause 2.04.00 of this specification may desire inspection Reports in respect of Formwork and Reinforcement and any other item of work as.

i) Test Reports

Reports of tests of various materials and concrete as required under Clause 4.0: SAMPLING & TESTING of this specification or as directed by the Engineer.

j) Any other data, which may be required as per this specification or as directed by the Engineer.

2.04.00

Conformity with Design

The Contractor will prepare checklists in approved Form, which will be called "Pour Cards". These Pour Cards will list out all items of work involved. The Contractor will inform the Engineer, sufficiently in advance, whenever any particular pour is ready for concreting. He shall accord all necessary help and assistance to the Engineer for all checking required in the pour. On satisfying himself that all details are in accordance to the drawings and specifications, the engineer will give written permission on the same Pour



TECHNICAL SPECIFICATION FOR CEMENT CONCRETE (PLAIN & REINFORCED)

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 7 OF 56

Cards allowing the contractor to commence placement of concrete. Details of all instructions issued by the Engineer and the records of compliance by the Contractor, deviations allowed by the Engineer and any other relevant information will be written on accompanying sheets attached to the Pour Cards. The Pour Cards along with accompaniments will be handed over to the Engineer before starting placement of concrete. One of the mix designs developed by the Contractor as per the I.S. Specifications and established to the satisfaction of the Engineer by trial mixes shall be permitted to be used by the Engineer, the choice being dictated by the requirements of designs and workability. The methods of mixing, conveyance, placement, vibration, finishing, curing, protection and testing of concrete will be as approved or directed by the Engineer.

2.05.00 Materials to be used

2.05.01 General Requirement

All materials whether to be incorporated in the work or used temporarily for the construction shall conform to the relevant IS Specifications unless-stated otherwise and be of best approved quality.

2.05.02 Cement

Ordinary Portland cement of grade-43 as per IS:8112/fly ash based Portland puzzolona cement conforming to IS:1489 (Part-1) shall preferably be used in reinforced/plain cement concrete works for all areas other than for the critical structures identified below. However, other types of cement such as ordinary Portland cement conforming to IS:269, Portland slag cement conforming to IS:455 respectively can be used under special circumstances. Cement used in all concrete mixes shall be in general of grade 33/43 unless design requires a higher grade. Ordinary Portland cement shall be used for following structure.

- a) TG foundation top deck and sub structures including raft.
- b) Spring Supporting decks of all machine foundations.
- c) Structures requiring grade of concrete of M30 and above.

In special cases, Rapid Hardening Portland Cement, Low Heat Cement, Sulphate resistant cement, high strength Ordinary Portland Cement etc. may be permitted or directed to be used by the Engineer.

For Brickwork, plaster, flooring and other finishing works, ordinary Portland cement of 33/43 grade shall be used.

2.05.03 Coarse Aggregate

Aggregate of sizes ranging between 4.75 mm and 150 mm will be termed as



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 8 OF 56

Coarse Aggregate. Coarse aggregate for concrete shall be chemically inert, hard, strong durable against weathering, of limited porosity, and free from deleterious materials. It shall be properly graded. Coarse aggregates shall be either crushed gravel or stone. All aggregates shall meet the requirement of IS:383:1970. Only Coarse Aggregate from, approved quarries and conforming to IS-383 will be allowed to be used on the works. Petrographic test shall be carried out by the contractor free of cost for checking the quality of rock from quarry. This test shall be repeated by the Contractor free of cost for change in quarry or as directed by the Engineer. The results shall be checked for reactivity of silica in aggregate with alkalis of cement.

2.05.04 Fine Aggregate

Aggregate smaller than 4.75 mm and within the grading limits and other requirements set in IS: 383 are termed as Fine Aggregate or Sand. Only Fine Aggregate from approved sources and conforming to the above IS Specification will be allowed to be used in works. Sand shall be hard, durable, clean and free from adherent coatings or organic matter and clay balls or pellets. Sand when used as fine aggregate in concrete shall conform to IS:383. For plaster, it shall conform to IS:1542 and for masonry work to IS:2116.

2.05.05 Water

Water for use in Concrete shall be clear and free from injurious oils, acids, alkalis, organic matter, salt, silts, or other impurities. Generally, IS: 3550 will be followed for routine tests. Acceptance of water shall be as per IS: 456.

2.05.06 Admixture

Only admixtures of approved quality will be used when directed or permitted by the Engineer. The different types of admixtures, which may be necessary to satisfy the concrete mix and the design requirement, shall be as per IS-9103 and may be one of the followings:

- a) Accelerating admixture
- b) Retarding admixture
- c) Water reducing admixture
- d) Air entraining admixture
- e) Water proofing admixture

The contractor shall inform the Engineer about the type of admixture which he is planning to use in different areas within the scope of work for the approval



TECHNICAL SPECIFICATION FOR CEMENT CONCRETE (PLAIN & REINFORCED)

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 9 OF 56

of the Engineer. The admixture shall be of proven make and from a reputed manufacturer. It should not have any adverse effect on strength, durability of concrete and reinforcement. Super plasticizers conforming to IS: 9103 or ASTM C-494 shall only be used as admixture having the above properties either individually or in a combination as per the direction of the Engineer.

2.05.07 Reinforcement

Reinforcement shall be as per relevant IS Specification as mentioned in the Contract/Drawing/Instructions. All bars shall be of tested quality.

2.06.00 Storage of Materials

2.06.01 General

All materials shall be stored so as to prevent deterioration or intrusion of foreign matter and to ensure the preservation of their quality and fitness for the work. Any material, which has deteriorated or has been damaged or is otherwise considered defective by the Engineer, shall not be used for concrete and shall be removed from site immediately, failing which, the Engineer shall be at liberty to get the materials removed and the cost incurred thereof shall be realised from the Contractor's dues. The Contractor shall maintain upto-date accounts of receipt, issue and balance (stack wise) of all materials. Storage of materials shall conform to IS: 4082.

2.06.02 Cement

Sufficient space for storage, with open passages between stacks, shall be arranged by the Contractor to the satisfaction of the Engineer.

Cement shall be stored off the ground in dry, leak proof, well-ventilated warehouses at the works in such a manner as to prevent deterioration due to moisture or intrusion of foreign matter.

Cement shall be stored in easily countable stacks with consignment identification marks. Consignments shall be used in the order of their receipts at site. Sub-standard or partly set cement shall not be used and shall be removed from the site, with the knowledge of the Engineer, as soon as it is detected.

2.06.03 Aggregates

Aggregates shall be stored on raised surface constructed by providing planks or steel plates or on concrete or brick masonry pavement. Each size shall be kept separated with wooden or steel or concrete or masonry bulkheads or in separate stacks and sufficient care shall be taken to prevent the material at the



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 10 OF 56

edges of the stock piles from getting intermixed. Stacks of fine and coarse aggregates shall be kept sufficiently apart with proper arrangement of drainage. The aggregates shall be stored in easily measurable stacks of suitable depths as may be directed by the Engineer.

2.06.04 Reinforcement

Reinforcing steel shall be stored consignment-wise and size-wise off the ground and under cover, if desired by the Engineer. It shall be protected from rusting, oil, grease, and distortions.

If necessary, the reinforcing steel may be coated with cement wash before stacking to prevent scale and rust at no extra cost to the Owner. The stacks shall be easily measurable. Steel needed for immediate use shall only be removed from storage.

2.07.00 Quality Control

Contractor shall establish and maintain quality control for different items of work and materials as may be directed by the Engineer to assure compliance with contract requirements and maintain and submit to the Engineer records of the same. The quality control operation shall include but not be limited to the following items of work:

a) Admixture:	Type, quantity, physical, and chemical properties that affects strength, workability, and durability of concrete. For air entraining admixtures, dosage to be adjusted to maintain air contents within desirable limits.
b) Aggregate:	Physical, chemical and mineralogical qualities. Grading, moisture content and impurities.
c) Water:	Impurities tests.
d) Cement:	Tests to satisfy relevant IS Specifications.
e) Formwork:	Material, shapes, dimensions, lines, elevations, surface finish, adequacy of form, ties, bracing and shoring and coating.
f) Reinforcement:	Shapes, dimensions, length of splices, clearances, ties and supports. Quality and requirement of welded splices.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 11 OF 56

Material tests or Certificates to satisfy relevant IS Specification.

- g) Grades of Concrete: Usage and mix design, testing of all properties.
- h) Batching & Mixing: Types and capacity of plant, concrete mixers and transportation equipment.
- i) Joints: Locations of joints, water stops and filler materials. Dimension of joints, quality, and shape of joint material and splices.
- j) Embedded and Anchorage Items: Material, shape, location, setting.
- k) Placing: Preparation, rate of pouring, weather limitations, time intervals between mixing and placing and between two successive lifts, covering over dry or wet surfaces, cleaning and preparation of surfaces on which concrete is to be placed, application of mortar/slurry for proper bond, prevention of cold joint, types of chutes or conveyors.
- l) Compaction: Number of vibrators, their prime mover, frequency and amplitude of vibration, diameter and weight of vibrators, duration of vibration, hand-spreading, rodding and tamping.
- m) Setting of base & Bearing plates: Lines, elevations, and bedding mortar.
- n) Concrete Finishes: Repairs of surface defects, screening, floating, steel trowelling and brooming, special finishes.
- o) Curing: Methods and length of time.

Copies of records and tests for the items noted above, as well as, records of corrective action taken shall be submitted to the Engineer for approval as may be desired.

3.00.00

INSTALLATION

All installation requirements shall be in accordance with IS: 456 and as supplemented or modified herein or by other best possible standards where the specific requirements mentioned in this section of the specification do not



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 12 OF 56

cover all the aspects to the full satisfaction of the Engineer.

3.01.00 Washing and Screening of Aggregates

Washing and screening of coarse and fine aggregates to remove fines, dirt, or other deleterious materials shall be carried out by approved means as desired by the Engineer.

3.02.00 Admixture

All concrete shall be designed for normal rate of setting and hardening at normal temperature. Variations in temperature and humidity under different climatic conditions will affect the rate of setting and hardening, which will, in turn, affect the workability and quality of the concrete. Admixtures including plasticisers of approved make may be used with the Engineer's approval in accordance with IS-456 to modify the rate of hardening, to improve workability or as an aid to control concrete quality. The Engineer reserves the right to require laboratory test or use test data, or owner satisfactory reference before granting approval. The admixture shall be used strictly in accordance with the manufacturer's directions and/or as directed by the Engineer.

3.03.00 Grades of Concrete

Concrete shall be in one of the grades designated in IS: 456. Grade of concrete to be used in different parts of work shall be as shown on the drawing. In case of liquid retaining structures, IS: 3370 will be followed. Minimum cement content shall be as per IS: 456.

3.04.00 Proportioning and Works Control

3.04.01 General

"Design Mix Concrete" and "Nominal Mix Design" is defined as follows for use in this specification:

- a) Proportioning of ingredients of concrete made with preliminary tests by designing the concrete mix. Such concrete shall be called "Design Mix Concrete".
- b) Proportioning of ingredients of concrete made without preliminary tests adopting nominal concrete mix. Such concrete shall be called "Nominal Mix Concrete".

As far as possible, design mix concrete shall be used on all concrete works. Nominal mix concrete, in grades M-15 or lower only may be used if shown on drawings or approved by the Engineer. In all cases the Proportioning of ingredients and works control shall be in accordance with IS: 456 and shall be



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 13 OF 56

adopted for use after the Engineer is satisfied regarding its adequacy and after obtaining his approval in writing.

3.04.02 Mix Design Criteria

Concrete mixes will be designed by the Contractor to achieve the strength, durability, and workability necessary for the job, by the most economical use of the various ingredients. In general, the design will keep in view the following considerations

- a) Consistent with the various other requirements of the mix, the quantity of water should be kept at the lowest possible level.
- b) The nominal maximum size of coarse aggregate shall be as large as possible within the limits specified.
- c) The various fractions of coarse and fine aggregates should be mixed in such a proportion as to produce the best possible combined internal grading giving the densest and most workable mix.
- d) The finished concrete should have adequate durability in all condition, to withstand satisfactorily the weather and other destruction agencies, which it is expected to be subjected to in actual service.
- e) The mix design shall have required workability and characteristic strength as per IS: 456. The quantity of cement, aggregates, and admixtures shall be determined by mass.

The requirement of adequate structural strength is catered for by the choice of proper grade of concrete in structural design. The Contractor will strictly abide by the same in his design of concrete mix installation. Various trials shall be given by the contractor with specific cement content on each trial. In some cases, plasticizers and other admixtures may be necessary to achieve the desired results.

3.05.00 Strength Requirements

The strength requirements of both design mix and nominal mix concrete where ordinary Portland Cement or Portland Blast furnace slag cement is used, shall be as per IS:456. All other relevant clauses of IS:456 shall also apply.

3.06.00 Minimum Cement Content

The minimum cement content for each grade of concrete shall be as per IS: 456. Contractor has to consider actual environmental exposure condition at



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 14 OF 56

site. Based on various tests results and as per Engineer, the environment condition shall be adopted for which minimum cement content shall be considered. No extra payment shall be made on account of any variation in environment condition.

- a) Sufficient number of trial mixes (to be decided by the Engineer) will be taken at the laboratory for the various designs and graphs of w/c ratio Vs crushing strengths at various ages will be plotted.
- b) All tests will be done in presence of the Engineer who shall be the final authority to decide upon the adoption of any revised minimum cement content. The Contractor will always be responsible to produce quality concrete of the required grade as per the acceptance criteria of IS: 456.
- c) The Engineer will always have the unquestionable right to revise the minimum cement content as decided above, if, in his opinion, there is any chance of deterioration of quality on account of use of lower cement content or any other reason.

3.07.00 Water-Cement Ratio

The choice of water-cement ratio in designing a concrete mix will depend on:-

- a) The requirement of strength.
- b) The requirement of durability.

3.07.01 Strength Requirement

In case of "Design Mix Concrete" the water-cement ratio of such value as to give acceptable test results as per IS: 456, will be selected by trial and error. The values of water-cement ratios for different grade and mix designs will have to be established after conducting sufficiently large number of preliminary tests in the laboratory to the satisfaction of the Engineer. Frequent checks on test will have to be carried out and the water-cement ratios will be revised if the tests produce unsatisfactory results. Notwithstanding anything stated above the Contractor's responsibility to produce satisfactory test results and to bear all the consequences in case of default remains unaltered.

In case of nominal mix concrete, the maximum water-cement ratio for different grades of concrete is specified in Table-5 of IS: 456 and no tests are necessary. The acceptance test criterion for nominal mix concrete shall be as per IS: 456.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 15 OF 56

3.07.02

Durability Requirement

Tables 4 & 5 of IS: 456 give the maximum water-cement ratio permissible from the point of view of durability of concrete subjected to adverse exposure to weather, sulphate attacks, and contact with harmful chemicals. Impermeability may also be an important consideration.

Whenever the water-cement ratio dictated by Durability consideration is lower than that required from strength criteria, the former should be adopted.

In general the water cement ratio between 0.4 and 0.45 will be desirable to satisfy the durability requirement and from the consideration of impermeability of concrete. The contractor may propose lower water cement ratio as mentioned above by addition of a suitable plasticizer/super-plasticizer. Trial mix shall be carried out accordingly. However, the contractor has to propose specifically along with field trials in the event of lower cement content if found suitable along with a plasticizer.

3.08.00

Workability

The degree of workability necessary to allow the concrete to be well consolidated and to be worked into the corners of formwork and around the reinforcement and embedments and to give the required surface finish shall depend*on the type and nature of structure and shall be based on experience and tests. The usual limits of consistency for various types of structures are given below:



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 16 OF 56

TABLE-V

LIMITS OF CONSISTENCY

Degree of workability	Slump in mm with Standard Cone as per IS: 1199		Use for which concrete is suitable
	Min.	Max.	
Very low	0	25	Large Mass concrete structure with heavy compaction equipments, roads
Low	25	50	Uncongested wide and shallow R.C.C. structures
Medium	50	100	Deep but wide R.C.C. structures with congestion of reinforcement and inserts
High	100	150	Very narrow and deep R.C.C. structures with congestion due to reinforcement and inserts.

Note: Notwithstanding anything mentioned above, the slump to be obtained for work in progress shall be as per direction of the Engineer.

With the permission of the Engineer, for any grade of concrete, if the water has to be increased in special cases, cement shall also be increased proportionately to keep the ratio of water to cement same as adopted in trial mix design for each grade of concrete. No extra payment will be made for this additional cement.

The workability of concrete shall be checked at frequent intervals by slump tests.

3.09.00 Size of coarse Aggregates

The maximum size of coarse aggregates for different locations shall be as follows unless otherwise directed by the Engineer

Very narrow space - 12 mm

Reinforced concrete
Except foundation - 20 mm



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 17 OF 56

Ordinary Plain concrete and Reinforced
concrete foundations - 40 mm

Mass concrete - 80 mm

Lean concrete - 40 mm

Grading of coarse aggregates for a particular size shall conform to relevant I.S. Codes and shall also be such as to produce a dense concrete of the specified proportions, strength and consistency that will work readily into position without segregation.

Coarse aggregate will normally be separated into the following sizes and stacked separately in properly designed stockpiles

80 mm to 40 mm, 40 mm to 20 mm and 20 mm to 5 mm. In certain cases it may be necessary to further split the 20 mm to 5 mm fraction into 20 mm to 10 mm and 10 mm to 5 mm fractions.

This separation of aggregates in different size fractions is necessary so that they may be remixed in the desired proportion to arrive at a correct internal grading to produce the best mix.

3.09.01 Temperature control of concrete in top decks of machine foundations (i.e. of TGs, BFPs, Fans and Mills) as extra payable over RCC item of BOQ:

The temperature of fresh concrete shall not exceed 23°C when placed. A suitable measuring device for measuring the temperature of concrete as approved by the Engineer shall be used. For maintaining the limiting temperature of the 23°C, crushed ice shall be used as mixing water. The ice shall be formed of water conforming IS: 456. The Contractor shall establish the quantity of crushed ice to be mixed in order to achieve the limiting temperature of 23°C.

3.09.02 Base raft of Turbo Generator foundations and top decks of all machine foundations shall be cast in a continuous operation without any construction joint.

3.10.00 Mixing of Concrete

Ingredients of the concrete mix shall be measured by weight. Concrete shall always be mixed in mechanical mixer. Water shall not normally be charged into the drum of the mixer until all the cement and aggregates constituting the batch are already in the drum and mixed for at least one minute. Mixing of each batch shall be continued until there is a uniform distribution of the materials and the mass is uniform in colour and consistency, but in no case



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 18 OF 56

shall mixing be done for less than 2 (two) minutes and at least 40 (forty) revolutions after all the materials and water are in the drum. When absorbent Aggregates are used or when the mix is very dry, the mixing time shall be extended as may be directed by the Engineer. Mixers shall not be loaded above their rated capacity as this prevents thorough mixing.

The entire contents of the drum shall be discharged before the ingredients for the next batch are fed into the drum. No partly set or remixed or excessively wet concrete shall be used. Such concrete shall be immediately removed from site. Each time the work stops, the mixer shall be thoroughly cleaned & when the next mixing commences, the first batch shall have 10% additional cement at no extra cost to the Owner to allow for loss in the drum.

Regular checks on mixer efficiency shall be carried out as directed by the Engineer as per IS: 4634 on all mixers employed at site only those mixers whose efficiencies are within the tolerances specified in IS: 1791 will be allowed to be employed.

Batching Plant shall conform to IS: 4925. The measuring gauges of batching plant shall be periodically calibrated for which the contractor shall provide standard weights. The accuracy of all gauges shall be within limits prescribed by the Engineer.

When hand mixing is permitted by the Engineer, for unimportant out of the way locations in small quantities, it shall be carried out on a water-tight platform and care shall be taken to ensure that mixing is continued until the mass is uniform in colour and consistency. In case of hand-mixing, 10% extra cement shall be added to each batch at no extra cost to the owner.

3.11.00 Conveying Concrete

Concrete shall be handled and conveyed from the place of mixing to the place of laying as rapidly as practicable by approved means and placed and compacted in the final position before the initial setting of the cement starts. Concrete should be conveyed in such a way as will prevent segregation or loss of any of the ingredients. For long distance haulage, agitator cars of approved design will be used. If, in spite of all precautions, segregations does occur during transport, the concrete shall be properly re-mixed before placement. During very hot or cold weather, if directed by the Engineer, concrete shall be transported in deep containers, which will reduce the rate of loss of water, by evaporation or loss of heat. If necessary, the container may have to be covered and insulated. Conveying equipments for concrete shall be well maintained and thoroughly cleaned before, commencement of concrete mixing. Such equipments shall be kept free from set concrete.



TECHNICAL SPECIFICATION FOR CEMENT CONCRETE (PLAIN & REINFORCED)

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 19 OF 56

3.12.00

Placing and Compacting Concrete

Where specifically covered, the relevant I.S. Code will be followed for the procedure of surface preparation, placement, consolidation, curing, finishes, repairs and maintenance of concrete. If, however, there is no specific provision in relevant I.S. code for any particular aspect of work, any other standard code of practice, as may be specified by the Engineer, will be adopted. Concrete may have to be placed against the following types of surfaces:

- a) Earth foundation
- b) Rock foundation
- c) Formwork
- d) Construction joint in concrete or masonry

The surface on or against which concrete is to be placed has to be cleaned thoroughly. Rock or old construction joint has to be roughened by wire brushing, chipping, sand blasting or any other approved means for proper bond. All cuttings, dirt, oil, foreign and deleterious material, laitance, etc. are to be removed by air water jetting or water at high pressure. Earth foundation on which direct placement of concrete is allowed, will be consolidated as directed by the Engineer such that it does not crumble and get mixed up with the concrete during or after placement, before it has sufficiently set and hardened.

Formwork, reinforcement, preparation of surface, embedments, joint seals etc., shall be approved in writing by the Engineer before concrete is placed. As far as possible, concrete shall be placed in the formwork by means approved by the Engineer and shall not be dropped from a height or handled in a manner which may cause segregation. Any drop over 1500 mm shall have to be approved by the Engineer.

Rock foundation or construction joint will be kept moist for at least 72 hours prior to placement. Concrete will be placed always against moist surface but never on pools of water. In case the foundation cannot be dewatered completely, special procedure and precaution, as directed by the Engineer will have to be adopted.

Formwork will be cleaned thoroughly and smeared lightly with form oil or grease of approved quality just prior to placement.

A layer of mortar of thickness 12 mm of the same or less w/c ratio and the same proportion as that of the concrete being placed or cement slurry will be spread thoroughly on the rock Foundation or construction joint just prior to



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 20 OF 56

placement of concrete.

After concrete has been placed, it shall be spread, if necessary & thoroughly compacted by approved mechanical vibration to maximum, subsidence without segregation and thoroughly worked around shape. Vibrators shall not be used for pushing concrete into adjoining areas. Vibrators must be operated by experienced workmen and the work carried out as per relevant IS Code of Practice: In thin members with heavy congestion of reinforcement or other embedments, where effective use of internal vibrator is, in the opinion of the Engineer, doubtful, in addition to immersion vibrators the contractor may have to employ form vibrators conforming to IS: 4656. For slabs and other similar structures, the contractor will additionally employ screed vibrator as per IS: 2506. Hand tamping may be allowed in rare cases, subject to the approval of the Engineer. Care must be taken to ensure that the inserts, fixtures, reinforcement, and formwork are not displaced or distorted during placing & consolidation of concrete.

The rate of placement of concrete shall be such that no cold joint is formed and fresh concrete is placed always against green Concrete, which is still plastic and workable. No concrete shall be placed in open, during rains. During rainy season, no placement in the open is to be attempted unless sufficient tarpaulins or other similar protective arrangement for completely covering the still green concrete from rain is kept at the site of placement. If there has been any sign of washing of cement and sand, the entire affected concrete shall be removed immediately. Suitable precautions shall be taken in advance to guard against rains before leaving the fresh concrete unattended. No accumulation of water shall be permitted on or around freshly laid concrete.

Slabs, beams, and similar members shall be poured in one operation, unless otherwise instructed by the Engineer. Mouldings, throating, drip course, etc., shall be poured as shown on the drawings or as directed by the Engineer. Holes shall be provided and bolts, sleeves, anchors, fastenings, or other fixtures shall be embedded in concrete as shown on the drawings or as directed by the Engineer. Any deviation there from shall be set right by the Contractor at his own expense as instructed by the Engineer.

In case the forms or supports get displaced during or immediately after the placement and bring the concrete surface out of alignment beyond tolerance limits, the Engineer may direct to remove the portion and reconstruct or repair the same -at the Contractor's expense.

The Engineer shall decide upon the time interval between two placements of concrete of different ages coming in contact with each other, taking in consideration the degree of maturity of the older concrete, shrinkage, heat dissipation and the ability of the older concrete to withstand the load imposed upon it by the fresh placement.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 21 OF 56

Once the concrete is deposited, consolidated and finished in its final position, it shall not be distributed.

3.13.00 Construction Joints and Cold Joints

3.13.01 Construction Joints

It is always desirable to complete any concrete structure by continuous pouring in one operation. However, due to practical limitation of methods and equipment and certain design considerations, construction joints are formed by discontinuing concrete certain predetermined stages. These joints will be formed in a manner specified in the drawings/Instruction.

Vertical construction joints will be made with rigid stop-board forms having slots for allowing passage of reinforcement rods and any other embedments and fixtures that may be shown. Next stage concrete shall be placed against construction joint as per clause 3.12.

Where the location of the joints are not specified, it will be in accordance with the following:

- a) In a column, the joint shall be formed 75 mm below the lowest soffit of the beam framing into it.
- b) Concrete in a beam shall preferably be placed without a joint, but if Provision of a joint is unavoidable, the joint shall be vertical and at the middle of the span.
- c) A joint in a suspended floor slab shall be vertical and at the middle of the span and at right angles to the principal reinforcement.
- d) Feather-edges in concrete shall be avoided while forming a joint.
- e) A construction joint should preferably be placed in a low-stress zone and at right angles to the direction of the principal stress.
- f) In case the Contractor proposes to have a construction joint anywhere to facilitate his work, the proposal should be submitted well in advance to the Engineer for study and approval without which no construction joint will be allowed.

3.13.02 Cold Joint

An advancing face of a concrete pour, which could not be covered by fresh concrete before expiry of initial setting time (due to an unscheduled stoppage or delay on account of breakdown in plant, inclement weather, low rate of



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 22 OF 56

placement or any other reason), is called a cold joint. The Contractor should always remain vigilant to avoid cold joints.

If, however, a cold joint is formed due to unavoidable reasons, the following procedure shall be adopted for treating it:

- a) If the concrete is so green that it can be removed manually and if vibrators can penetrate the surface without much effort, fresh concrete can be placed directly against the old surface. The old concrete should be covered by fresh concrete as quickly as possible and the joint thoroughly and systematically vibrated.
- b) In case concrete has hardened a bit more than (a) but can still be easily removed by a light hand pick, the surface will be raked thoroughly and the loose concrete removed completely without disturbing the rest of the concrete in depth. A rich mortar layer 12 mm in thickness, will be placed on the cold joint fresh concrete shall be placed on the mortar layer and the joint will be thoroughly and systematically vibrated penetrating the vibrator deep into the old layer of concrete.
- c) In case the concrete at the joint has become so stiff that it cannot be remoulded and mortar or slurry does not raise inspite of extensive vibration, the joint, will be left to harden for at least 12 - 24 hrs. It Will then be treated as a regular construction joint, after cutting the concrete to required shape and preparing the surface as described under clause 3.12.

3.14.00 Repairs, Finishes, and Treatment of Concrete surfaces

3.14.01 Adequate and sound concrete surfaces, whether formed or unformed, can be obtained by employing a concrete mix of proper design, competent formwork, appropriate methods of handling, placing, and consolidation by experienced workmen.

Unsound concrete resulting from improper mix design, incompetent methods, equipment and formwork, poor workmanship and protection will not be accepted and will have to be dismantled, removed and replaced by sound concrete at the Contractor's cost. The Engineer may, at his sole discretion, allow to retain concrete with minor defects provided the Contractor is able to repair it by approved methods at no extra cost to the Owner, All concrete work shall be inspected by the Contractor immediately after the forms are removed & he will promptly report occurrence of any defects to the Engineer. All repair works will be carried out as per the instructions and in the presence of the Engineer or his representative. Generally, repair work will consist of any or all of the following operations:

- a) Sack rubbing with mortar and stoning with carborundum stone.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 23 OF 56

- b) Cutting away the defective concrete to the required depth shape.
- c) Cleaning of reinforcement & embedments. It may be necessary to provide an anti-corrosive coating on the reinforcement.
- d) Roughening by sand blasting or chipping.
- e) Installing additional reinforcement/welded mesh fabric.
- f) Dry packing with stiff mortar.
- g) Plastering, guniting, shotcreting etc.
- h) Placing and compacting concrete in the void left by cutting out defective concrete.
- i) Grouting with cement sand slurry of 1:1 mix.
- j) Repairing with a suitable mortar either cement or resin modified mortars.
- k) Polymer modified patching and adhesive repair & mortar for beams & columns.

3.14.02 Finishing unformed Surface

The contractor shall provide normal finishes in unformed surfaces which can be achieved by screeding, floating, trowelling etc. A few typical and common cases of treatment of concrete surface are cited below

a) Floor

Whenever a non-integral floor finish is indicated, the surface of reinforced concrete slab shall be struck off at the specified levels and slopes and shall be finished with a wooden float fairly smooth removing all laitance. No over trowelling, to obtain a very smooth surface, shall be done, as it will prevent adequate bond with the subsequent finish. If desired by the Engineer, the surface shall be scored and marked to provide better bond.

Where monolithic finish is specified or required, concrete shall be compacted and struck off at the specified levels and slopes with a screed, preferably a vibrating type and then floated with a wooden float. Steel trowelling is then started after the moisture film and shine have disappeared from the surface and after the concrete has hardened enough to prevent excess of fines and water to rise to the surface but not hard enough to prevent proper finishing of aberrations. Steel trowelling properly done will flatten and smoothen sandy surface left by wooden floats and produce a dense surface free from blemishes,



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 24 OF 56

ripples, and trowel marks.

A fine textured surface that is not slick and can be used where there is likelihood of spillage of oil or water can be obtained by trowelling the surface lightly with a circular motion after initial trowelling keeping the steel trowel flat on the surface.

To provide a better grip the Engineer may instruct marking the floor in a regular geometric pattern after initial trowelling.

b) Beans, Columns & Walls

If on such or any other concrete structure it is intended to apply plaster or such concrete surfaces against which brickwork or other allied works are to be built, the Contractor shall hack the surface adequately as soon as the form is stripped off so that proper bond can develop. Pattern, adequacy, and details of such hacking shall meet with the approval of the Engineer, who shall be informed to inspect such surfaces before they are covered up.

3.15.00 Protection and Curing of concrete

Newly placed concrete shall be protected by approved means from rain, sun, and wind. Concrete placed below the ground level shall be protected against contamination from falling earth during and after placing. Concrete placed in ground containing deleterious substances, shall be protected from contact with such ground, or with water draining from such ground, during placing of concrete and for a period of at least three days, or as otherwise instructed by the Engineer. The ground water around newly poured concrete shall be kept to an approved level by pumping out or other adequate means of drainage to prevent floatation or flooding. Steps, as approved by the Engineer, shall be taken to protect immature concrete from damage by debris, excessive 'Loadings, vibration, abrasion, mixing with earth or other deleterious materials, etc. that may impair the strength and durability of the concrete.

As soon as the concrete has hardened sufficiently, it shall be covered either with sand, hessian, canvas, or similar materials and kept continuously wet for at least 14 (fourteen) days after final setting. Curing by continuous sprinkling of water will be allowed if the Engineer is satisfied with the adequacy of the arrangements made by the Contractor. Quality of water for curing shall be as per IS: 456.

If permitted by the Engineer, liquid curing compound may be used for prevention of premature water loss in concrete and thereby effecting curing of concrete. This type of curing compound shall be sprayed on newly laid concrete surfaces to form a thin film barrier against premature water loss without disturbances to normal setting action. The curing compound shall be emulsified paraffin based and shall comply with ASTM requirements for



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 25 OF 56

acceptance.

The curing compound shall be applied following the final finishing operation and immediately after disappearance of water from concrete surface. It is important not to apply the curing compound when standing water is still present on concrete.

The contractor shall arrange for the manufacturer's supervision at no extra cost.

The Contractor shall remain extremely vigilant and employ proper equipment and workmen under able supervision for curing. The Engineer's decision regarding the adequacy of curing is final. In case the Engineer notices any lapse on the part of the Contractor, he will inform the Contractor or his supervisor verbally or in writing to correct the deficiency in curing. If no satisfactory action is taken by the Contractor within 3 (three) hours of issuance of such instruction, the Engineer will be at liberty either to employ sufficient means through any agency to make good the deficiency and recover the cost thereof from the Contractor, or deduct certain amount from contractor's payment for the part where inadequate curing was noticed entirely at the discretion of the Engineer.

3.16.00 Reinforcement

Mild steel round bars, TMT bars, Hot rolled deformed bars or cold twisted deformed bars as medium tensile or high yield strength steel, plain hard drawn steel wire fabric etc, will be used as reinforcement as per drawings and directions. In an aggressive environment an anti-corrosive coating on the reinforcement may be provided as per IS: 9077, as shown on the drawing or as directed by the Engineer.

3.16.01 Bar Bending Schedules

The Contractor shall prepare Bar Bending Schedules showing clearly the arrangements proposed by the Contractor to match available stock of reinforcing steel, progressively, starting within one week of receipt of approval on corresponding design of RCC structure. As decided by the Engineer, some or all the detailed drawings and schedules will have to be submitted for approval. Approval of such detailed drawings by the Engineer shall not relieve the Contractor of his responsibility for correctness nor of any of his obligations to meet the other requirements of the contract. The contractor for record and distribution shall submit six prints of the final drawings & schedules with one reproducible print.

3.16.02 Cleaning

All steel for reinforcement shall be free from loose scales, oil, grease, paint or



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 26 OF 56

other harmful matters immediately before placing the concrete.

3.16.03 Bending

Unless otherwise specified, reinforcing steel shall be bent in accordance with the procedure specified in IS: 2502 or as approved by the Engineer. Bends and shapes shall comply strictly with the dimensions corresponding with the final Bar Bending Schedules. Bar Bending Schedules shall be rechecked by the Contractor before any cutting, bending is done.

No reinforcement shall be bent when already in position in the work, without approval of the Engineer, whether or not it is partially embedded in concrete. Bars shall not be straightened in a manner that will injure the material. Rebending can be done only if approved by the Engineer. Reinforcing bars shall be bent by machine or other approved means producing a gradual and even motion. All the bars shall be cold bent unless otherwise approved. Bending hot at a cherry-red heat (not exceeding 845°C) may be allowed under very exceptional circumstances except for bars whose strength depends on cold working. Bars bent hot shall not be cooled by quenching.

3.16.04 Placing in Position

All reinforcements shall be accurately fixed and maintained in position as shown on the drawings by such approved and adequate means like mild steel chairs and/or concrete spacer blocks. Bars intended to be in contact at crossing points, shall be securely tied together at all such points by No. 20 G annealed soft iron wire or by tack welding in case of Bar larger than 25 mm dia., as may be directed by the Engineer. Binders shall tightly embrace the bars with which they are intended to be in contact and shall be securely held. The vertical distance between successive layers of bars shall be maintained by provision of mild steel spacer bars. They should be spaced such that the main bars do not sag perceptibly between adjacent spacers. Before actual placing, the Contractor shall study the drawings thoroughly and inform the Engineer in case he feels that placement of certain bars is not possible due to congestion. In such cases he should not start placing any bar before obtaining clearance from the Engineer.

3.16.05 Welding / Coupler for Splicing

Lapping shall normally do splicing of reinforcement. For M.S. reinforcement bars, butt-welding may be done, if permitted by the Engineer, under certain conditions. The work should be done with suitable safeguards in accordance with relevant Indian Standards for welding of mild steel bars used in reinforced concrete construction as per IS: 2751 and IS: 456. For High yield strength deformed bars, lap welding may be done, if permitted by the Engineer, under certain conditions. The work should be done with suitable safeguards in accordance with relevant Indian Standards as per IS: 9417.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 27 OF 56

Welding of High yield strength deformed bar shall not be allowed.

Splicing of reinforcement using mechanical coupler may be done, if permitted by the Engineer, under certain conditions. The work should be done with suitable safeguards in accordance with relevant Indian standards for "Reinforcement couplers for mechanical splices of bars in concrete" as per IS: 16172. Corrosion test in the coupler-bar connections exposed to marine or severe environmental conditions to rule out any risk of galvanic corrosion will be done by the contractor at no extra cost. Proper fitting & fixing of mechanical coupler to rebar shall be ensured at site for each coupled joint as per inspection testing plan developed at site in consultation with manufacturer of coupler. If so required at site, coupler/ threading on rebar shall be such that two bars can be coupled by moving couplers not rebar (as being heavy reinforcement weight and L shaped, it is not feasible to rotate the rebar for fixing up the coupler) at no extra cost.

3.16.06 Control

The placing of reinforcements shall be completed well in advance of concrete pouring. Immediately before pouring, the reinforcement shall be examined by the Engineer for accuracy of placement and cleanliness. Necessary corrections as directed by him shall be carried out. Laps and anchorage lengths of reinforcing bars shall be in accordance with IS: 456, unless otherwise specified. The laps shall be staggered as far as practicable and as directed by the Engineer. Arrangements for placing concrete shall be such that reinforcement in position does not have to bear extra load and get disturbed. The cover for concrete over the reinforcements shall be as shown on the approved drawings unless otherwise directed by the Engineer. Where concrete blocks are used for ensuring the cover and positioning reinforcement, they shall be made of mortar not leaner than 1 (one) part cement to 2 (two) parts sand by –volume and cured in a pond for at least 14 (fourteen) days. The type, shape, size and location of the concrete blocks shall be as approved by the Engineer.

3.17.00 Cold Weather Concreting

When conditions are such that the ambient temperature may be expected to be 5°C or below during the placing and curing period, the work shall conform to the requirement of IS: 456 and IS: 7861.

3.18.00 Hot Weather Concreting

When depositing concrete in very hot weather, the Contractor shall take all precautions as per IS: 7861 and stagger the work to the cooler parts of the day to ensure that the temperature of wet concrete used in massive structures does not exceed 38°C while placing. Positive temperature control by precooling, post cooling or any other method, if required, will have to be done by the



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 28 OF 56

contractor at no extra cost.

3.19.00 Concreting under water

When it is necessary to deposit concrete under water it shall be done in accordance with the requirements of IS: 456.

3.20.00 Form Work

3.20.01 General

If it is so desired by the Engineer, the contractor shall prepare, before commencement of actual work, designs and working drawings for formwork and centring and get them approved by the Engineer. The formwork shall conform to the shape, grade, lines, levels and dimensions as shown on the drawings.

Materials used for the formwork inclusive of the supports and centring shall be capable of withstanding the working load and remain undistorted throughout the period it is left in service. All supports and scaffolds should be manufactured from structural or tubular steel except when specifically permitted otherwise by the Engineer.

The centring shall be true to vertical, rigid and thoroughly braced both horizontally and diagonally. Rakers are to be used where forms are to support inclined members. The forms shall be sufficiently strong to carry without undue deformation, the dead weight and horizontal pressure of the concrete as a liquid as well as the working load. In case the contractor wishes to adopt any other design criteria, he has to convince the Engineer about its acceptability before adopting it. Where the concrete is vibrated, the formwork shall be strong enough to withstand the effects of vibration without appreciable deflection, bulging, distortion or loosening of its components. The joints in the formwork shall be sufficiently tight to prevent any leakage of slurry or mortar.

To achieve the desired rigidity, tie bolts, spacer blocks, tie wires and clamps as approved by the Engineer shall be used but they must in no way impair the strength of concrete or cause stains or marks on the finished surface. Where there are chances of these fixtures being embedded, only mild steel and concrete of adequate strength shall be used. Bolts passing completely through liquid retaining walls/slabs for the purpose of securing and aligning the formwork shall not be used.

The formwork shall be such as to ensure a smooth uniform surface free from honeycombs, air bubbles, bulges, fins and other blemishes. Any blemish or defect found on the surface of the concrete must be brought to the notice of the Engineer immediately and rectified as directed by him.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 29 OF 56

For exposed interior and exterior concrete surfaces of beams, columns and wall, plywood or other approved form shall be thoroughly cleaned and tied together with approved corrosion-resistant devices. Rigid care shall be exercised in ensuring that all column forms are in true plumb and thoroughly cross-braced to keep them so. All floor and beam centring shall be crowned not less than 8 mm in all directions for every 5 metres span. The formwork should lap and be secured sufficiently at the lift joints to prevent bulges and offsets.

Temporary openings for cleaning, inspection and for pouring concrete shall be provided at the base vertical forms and at other places, where they are necessary and as may be directed by the Engineer. The temporary openings shall be so formed that they can be conveniently closed when required, during pouring operations without leaving any mark on the concrete.

3.20.02 Cleaning and Treatment of Forms

All parts of the forms shall be thoroughly cleaned of old concrete, wood shavings, saw dust, dirt and dust sticking to them before they are fixed in position. All rubbish, loose concrete, chippings, shavings, sawdust etc. shall be scrupulously removed from the interior of the forms before concrete is poured. Compressed air jet and/or water jet along with wire brushes brooms etc. shall be used for cleaning. The inside surface of the formwork shall be treated with approved non-staining oil or other compound before it is placed in position. Care shall be taken that oil or other compound does not come in contact with reinforcing steel or construction joint surfaces. They shall not be allowed to accumulate at the bottom of the formwork. The oiling of the formwork will be inspected just prior to placement of concrete and redone wherever necessary.

3.20.03 Design

The formwork shall be so designed and erected that the forms for slabs and the sides of beams, columns, and walls are independent of the soffits of beams and can be removed without any strain to the concrete already placed or affecting the remaining formwork.

Removing any props or repropping shall not be done except with the specific approval of the Engineer. If formwork for column is erected for the full height of the column, one side shall be left open and built up in sections, as placing of concrete progress. Wedges, spacer bolts, clamps or other suitable means shall be provided to allow accurate adjustment and alignment of the formwork and to allow it to be removed gradually without jarring the concrete.



TECHNICAL SPECIFICATION FOR CEMENT CONCRETE (PLAIN & REINFORCED)

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 30 OF 56

3.20.04

Inspection of Forms

Casting of Concrete shall start only after the formwork has been inspected and approved by the Engineer. The concreting shall start as early as possible within 3 (three) days after the approval of the formwork and during this period the formwork shall be kept under constant vigilance against any interference. In case of delay beyond three days, a fresh approval from the Engineer shall be obtained.

3.20.05

Removal of Forms

Formwork shall be kept in position after casting of concrete for a minimum period as mentioned in IS: 456, however the period of retaining form in position can be extended as per drawing, instruction of Engineer or as required for satisfactory completion of work without any extra cost. Before removing any formwork, the Contractor must notify the Engineer well in advance to enable him to inspect the concrete if the Engineer so desires.

The Contractor shall record on the drawing or in any other approved manner, the date on which concrete is placed in each part of the work and the date on which the formwork is removed there from and have this record checked and countersigned by the Engineer regularly. The Contractor shall be responsible for the safe removal of the formwork and any work showing signs of damage through premature removal of formwork or loading shall be rejected and entirely reconstructed by him without any extra cost to the Owner, The Engineer may, however, instruct to postpone the removal of formwork if he considers it necessary.

If any other type of cement other than ordinary Portland cement and Rapid hardening cement is used, the time of removal of forms shall be revised such that the strength of this cement at the time of removal of forms match with strength of Portland cement at the time of removal of form.

3.20.06

Tolerance

The formwork shall be so made as to produce a finished concrete, true to shape, lines, levels, plumb and dimensions as shown on the drawings subject to the following tolerances unless otherwise specified in this specification or drawings or directed by the Engineer:-

- For -
- | | |
|--------------------------|--|
| a) Sectional dimension - | ± 5 mm |
| b) Plumb - | 1 in 1000 of height |
| c) Levels - | ± 3 mm before any deflection has taken place |

The tolerance given above are specified for local aberrations in the finished concrete surface & should not be taken as tolerances for the entire structure



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 31 OF 56

taken as a whole or for the setting and alignment of formwork, which should be as accurate as possible to the entire satisfaction of the Engineer. Any error, within the above tolerance limits or any other as may be specially set up by the Engineer, if noticed in any lift of the structure after stripping of forms, shall be corrected in the subsequent work to bring back the surface of the structure to its true alignment.

3.20.07 Re-use of Forms

Before re-use, all forms shall be thoroughly scraped, cleaned, joints and planes examined and when necessary repaired, and inside surface treated as specified hereinbefore. Formwork shall not be used/re-used if declared unfit or unserviceable by the Engineer.

3.20.08 Classification

Generally, the "ordinary" class formwork shall be used unless otherwise specified.

- a) **Ordinary:** These shall be used in places where ordinary surface finish is required and shall be composed of steel and/or approved good quality partially seasoned timber.
- b) **Plywood:** These shall be used in exposed surfaces, where specially good finish is required and shall be made of approved brand of heavy quality plywood to produce a perfectly uniform and smooth surface conforming to the shape described in the drawing with required grain texture on the concrete. Re-use may only be permitted after special inspection and approval by the Engineer. He may also permit utilization of used plywood for the "ordinary" class, if it is still in good condition.
- c) **Ornamental:** These shall be used where ornamental and curved surface are required and shall be made of selected best quality well seasoned timbers or of plywood, which can be shaped correctly.

3.21.00 Opening, Chases, Grooves, Rebates, Blockouts etc.

The Contractor shall leave all openings, grooves, chases, etc. in concrete work as shown on the drawings or as specified by the Engineer.

3.22.00 Anchor Bolts, Anchors, Sleeves, Inserts, Hangers/Conduits/Pipe and other misc. Embedded Fixtures

The Contractor shall build into concrete work all the items noted below and shall embed them partly or fully as shown on drawings and secure the same as may be required. The materials shall be as specified and be of best quality available according to relevant Indian Standards of approved manufacture and



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 32 OF 56

to the satisfaction of the Engineer. Exposed surfaces of embedded materials are to paint with one coat of approved anti- corrosive paint and/or bituminous paint without any extra cost to the Owner. If welding is to be done subsequently on the exposed surface of embedded material, the paint shall be cleaned off the member to a minimum length of 50 mm beyond each side of the weld line.

Necessary templates, jigs, fixtures, supports etc. shall be used as may be required or directed by the Engineer.

Items to be embedded

- a) Inserts, hangers, anchors, frame around openings, manhole covers, frames, floor clips, sleeves conduits and pipes.
- b) Anchor bolts and plates for machinery, equipment and for structural steel work.
- c) Steel structurals to be left embedded for future extension, special connection etc.
- d) Dowel bars, etc. for concrete work falling under the scope of other contractors.
- e) Lugs or plugs for door and window frames occurring in concrete work.
- f) Flashing and jointing in concrete work.
- g) Any misc. embedments and fixture as may be required.

Correct location and alignment, as per drawings/instruction of all these embedded items shall be entirely the responsibility of the Contractor.

3.23.00 Expansion and Isolation Joints

3.23.01 General

Expansion and isolation joints in concrete structures shall be provided at specific places as per details indicated on the drawings. The materials and types of joints shall be as specified hereinafter. In case of liquid retaining structures, additional precautions shall be taken to prevent leakage of liquids as may be specified on the drawings or as directed by the Engineer. All materials are to be procured from reliable manufacturers and must have the approval of the Engineer. Where it is the responsibility of the Contractor to supply the material, the Engineer may demand test certificates for the materials and/or instruct the Contractor to get them tested in an approved



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 33 OF 56

laboratory free of cost to the Owner. Joints shall be formed true to line, level, shape, dimension, and quality as per drawings and specifications. Prior approval of the method of forming the joints should be obtained from the Engineer before starting the work.

3.23.02 Bitumen Board/ Expanded Polystyrene Board

a) Bitumen Board

Bitumen impregnated fibreboard of approved manufacturer as per IS: 1838 may be used as fillers for expansion joints. It must be durable and waterproof. It shall be compressible and possess a high degree of rebound. The dimensions of the board should be equal to that of the joint being formed. It should, preferably be manufactured in one piece, matching the dimension of the joint and not prepared by cutting to size smaller pieces from larger boards at site. At the exposed end, the joint shall be sealed with approved sealing compound to a depth of at least 25 mm after application of an approved primer. The sealing compound and the primer shall be applied as specified by the manufacturer.

b) Expanded Polystyrene Boards

If required, commercial quality of expanded polystyrene products commonly used for thermal insulations may also be used as filler material in expansion joints. The thickness may vary from 12 mm to 50 mm. The material will have to be procured from reliable manufacturers as approved by the Engineer. The method of installations will be similar to that recommended by the manufacturers for fixing on cold storage walls. A coat of Bitumen paint may have to be applied on the board against which concrete will be placed.

3.23.03 Joint sealing strips

Joint sealing strips may be provided at the construction, expansion, and isolation joints as a continuous diaphragm to contain the filler material and/or to exclude passage of water or any other material into or out of the structure. The sealing strips will be either metallic like G.I., Aluminums, or Copper, or non-metallic like rubber or P.V.C.

Sealing strips will not have any longitudinal joint and will be procured and installed in largest practicable lengths having a minimum number of transverse joints. The material is to be procured from reputed manufacturers having proven records of satisfactory supply of joint strips of similar make and shape for other jobs. The jointing procedure shall be as per the manufacturer's recommendations, revised if necessary, by the Engineer. The Contractor is to supply all labour and material for installation -including the material and tools required for jointing, testing, protection, etc. If desired by



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 34 OF 56

the Engineer, joints in rubber seals may have to be vulcanized.

a) Metal Sealing Strips

Metal sealing strips shall be either G.I., Aluminium or Copper and formed straight, U shaped, Z shaped or any other shape and of thickness as indicated in the drawing. The transverse joints will be gas welded using brass rods and approved flux and will be tested by an approved method to establish that it is leak proof. If required, longer lap lengths and different method of brazing which will render it leak proof, will be adopted by the Contractor. The edges shall be neatly crimped and bent to ensure proper bond with the concrete.

i) G.I. Strips

G.I. strips shall be minimum 1.5 mm thick and 150 mm in width unless specified otherwise. The standard of Galvanizing shall be as per relevant Indian Standards for heavy-duty work. At the joints, the overlapping should be for a minimum length of 50 mm.

ii) Aluminium Strips

Aluminium strips shall be minimum 18 SWG thick and 300 mm wide unless specified otherwise and shall conform to IS: 737 of 19000 grades or 31000 grade (Designation as per IS: 6051). A minimum lap of 50 mm length is required at the joints.

iii) Copper Strips

The Copper strips shall be minimum 18 SWC in thickness and 300 mm width unless specified otherwise and shall conform to the relevant Indian Standards. It should be cleaned thoroughly before use to expose fresh surface, without any reduction in gauge. A minimum lap of 50 mm in length is required at the joints.

b) Non-metallic Sealing Strips

These will be normally in Rubber or P.V.C. Rubber or P.V.C. joint seals can be of shape having any combination of the following features:

i) Plain

ii) Central bulb

iii) Dumb-bell or flattened ends

iv) Ribbed and Corrugated Wings



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 35 OF 56

v) V shaped

As these types of seals can be easily handled in very large lengths unlike metal strips, transverse joints will be allowed only under unavoidable circumstances and with the specific approval of the Engineer. The method of forming these joints, laps etc. shall be as specified by the Manufacturer and/or as approved by the Engineer taking particular care to match the central bulbs & the edges accurately.

c) Rubber Sealing Strips

The minimum thickness of Rubber sealing strips shall be 3 mm and the minimum width 100 mm. The actual size and shape will be as shown in drawings or as directed by the Engineer. The material will be natural rubber and be resistant to corrosion, abrasion, and tear and also to attacks from the acids, alkalis and chemicals normally encountered in service. The physical properties will be generally as follows. The actual requirements may be slightly different as decided by the Engineer:

Specific Gravity	:	1.1 to 1.15
Shore Hardness	:	65A to 75A
Tensile Strength	:	25 - 30 N/Sq.mm
Maximum Safe Continuous Temperature	:	75°C
Ultimate Elongation	:	Not less than 350%

b) P.V.C., Sealing Strips

The minimum thickness of P.V.C. sealing strips will be 3 mm and the minimum width 100 mm. The actual size and shape will be as shown in drawings or as directed by the Engineer. The material should be of good quality Polyvinyl Chloride highly resistant to tearing, abrasion, and corrosion as well as to chemicals likely to come in contact with during use. The physical properties will generally be as follows. The actual requirements, which will be directed by the Engineer, may vary slightly

Specific Gravity	:	1.3 to 1.35
Shore Hardness	:	60A to SOA
Tensile Strength	:	10 - 15 N/Sq.mm



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 36 OF 56

Maximum Safe Continuous
Temperature : 70 Deg.C

Ultimate Elongation : Not less than 275%

3.23.04 Bitumen Compound

When shown in drawing or directed, the gap in expansion joints shall be thoroughly cleaned and bitumen compound laid as per manufacturer's specifications. The compound to be used shall be of approved manufacture and shall conform to the requirements of IS: 1834.

3.23.05 Isolation Joints

Strong and tough alkathene sheet or equivalent, about 1 mm in thickness and as approved by the Engineer shall be used in isolation joints. It shall be fixed by an approved adhesive compound on the cleaned surface of the already set concrete to cover it fully. Fresh concrete shall be laid against the sheet, care being taken not to damage the sheet in any way.

3.23.06 Pad

Hard foundation quality rubber pads of required thickness and shapes shall be put below machine or other foundations as shown on the drawings. The rubber shall have a unit weight of 1500 Kg/Cu.m, a shore hardness - 65A to 70A and be of best quality of approved manufacture, durable, capable of absorbing vibration and must be chemically inert in contact with moist or dry earth or any other deleterious material expected under normal conditions.

3.24.00 Grouting under Machinery or Structural Steel Bases

If required, grouting under base plates of machines or structural steel etc. shall be carried out by the Contractor. In general, the mix shall be 1 (one) part cement and 1 (one) part sand and just enough water to make it flow as required. The areas to be grouted shall be cleaned thoroughly with compressed air jet and/or with water in locations where accumulated surplus water can be removed. Where directed by the Engineer, 6 mm down stone chips may have to be used in the mix. Surface to be grouted shall be kept moist for at least 24 hours in advance. The grout shall be placed under expert supervision, so that there is no locked up air. Edges shall be finished properly. If specified on drawings, admixtures like Aluminium powder, "Ironite" etc. may have to be added with the grout in required proportions. Premixed non-shrink grout of approved manufacture having proper strength shall be used with Engineer's approval for important machineries.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 37 OF 56

3.25.00

Precast Concrete

The Specification for precast concrete will be similar as for the cast-in-place concrete described herein and as supplemented in this section. All precast work shall be carried out in a yard made for the purpose. This yard shall be dry, properly levelled and having a hard and even surface. If the ground is to be used as a soffit former of the units, it shall be paved with concrete or masonry and provided with a layer of plaster (1:2 proportion) with smooth neat cement finish or a layer of M.S. sheeting. Where directed by the Engineer, casting will have to be done on suitable vibrating table. The yard, lifting equipment, curing tank, finished material storage space etc. shall be designed such that the units are not lifted from the mould before 7 (seven) days of curing and can be removed for erection after 28 (twenty-eight) days of curing. The moulds shall preferably be of steel or of timber lined with G.I. sheet metal. The yard shall preferably be fenced.

Lifting hooks, where necessary or as directed by the Engineer, shall be embedded in correct position of the units to facilitate erection, even though they may not be shown on the drawings, and shall be burnt off and finished after erection.

Precast concrete units, when ready, shall be transported to site by suitable means approved by the Engineer. Care shall be taken to ensure that no damage occurs during transportation. All adjustments, levelling, and plumbing shall be done as per instructions of the Engineer. The Contractor shall render all help with instruments, materials, and men to the Engineer for checking the proper erection of the precast units.

After erection and alignment, the joints shall be filled with grout or concrete as per drawings. If centrings have to be used for supporting the precast units, they shall not be removed until the joints have attained sufficient strength and in no case before 14 (fourteen) days. The joint between precast roof planks shall be pointed with 1:2 cement: sand mortar where called for in the drawings.

3.26.00

Waterproofing of Concrete Structure

3.26.01

General

Where required, waterproofing of concrete structures shall be ensured internally by suitable design of the concrete mix, addition of suitable admixtures in the concrete or mortar at the time of mixing and/or installing water bars at the joints. In addition to the above measures, the structures shall be made watertight by adopting "structural waterproofing" as per specification. The design, material, and workmanship shall conform to the relevant I.S. Codes where applicable. The Engineer's approval of the materials shall be obtained by the Contractor before procurement. If desired by the



TECHNICAL SPECIFICATION FOR CEMENT CONCRETE (PLAIN & REINFORCED)

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 38 OF 56

Engineer, test certificates for the materials and samples shall be submitted by the Contractor free of charge. The materials shall be of best quality available indigenously, fresh clean and suitable for the duties called upon.

3.26.02

Water Bar/Seal/Special Treatment of Construction Joint

Water bearing structures and underground structures may have water bar/seals installed at the joints. They may be metallic, rubber, or P.V.C. The materials and installation will be as described under Clause 3.23.3. Construction joint shall be provided as per clause 3.13.1 with or without water bar/seal as shown on the drawing. In case of water bars being used at the construction joint, fixing of the same has to be done carefully, so that the water bar is not disturbed during concreting. The construction joint shall also be treated by any one of the following methods.

Method 1: A surface retarder in the form of a thixotropic gel shall be applied on the joint surface of the previous pour in case of joint on the wall and in case of floor the same shall be applied on the formwork against which previous pour of concreting shall be done. The retarder may be liquid or paste form depending on the type of formwork. The formwork shall be removed within 24 hours after concreting. Within 2 hours of striking of the formwork the retarder shall be washed off with strong water jet to make surface rough and clean. Then a rich cement mortar using cement, sand and aggregates (maximum size 8 mm) along with synthetic rubber emulsion type water resistant bonding agent shall be applied for a depth of 50 mm just before pouring the next stage of concreting. In case of walls, the above bonding agent will be mixed with water, which will be used for making the cement mortar. The proportion of mixing of this bonding agent with water shall be as per manufacturer's specification. In case of floor joint, however, after washing of retarder a solvent free two-component epoxy resin-bonding agent will be used at the joint before the next pour of concrete. The above bonding agent shall have the following properties after 28 days

Compressive strength	-	55 to 60 N/Sq.mm
Flexural strength	-	5 to 30 N/sq.mm
Tensile strength	-	15 N/Sq.mm (approx.)
Bonding strength to concrete	-	3 N/Sq.mm (approx.)
Bonding strength to steel	-	20 N/Sq.m (approx.)

The whole operation shall be done as per manufacturers specification. The contractor shall provide manufacturer's supervision at no extra cost to the owner.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 39 OF 56

Method 2: One row of threaded nozzles at regular intervals not exceeding 1.5 m centre to centre shall be placed in concrete along the construction joint during casting. Injection of cement water together with a suitable waterproof expanding grouting admixture of approved quality shall be done through the nozzles after the concrete has set to seal the voids in concrete near the construction joint in walls and slabs. The injection shall be done under pressure of approximately 2 to 4 kg/sq.cm. The nozzles shall be sealed off with suitable admixture after the injection is over. The whole operation shall be carried out as per manufacturer's specification and supervision. The cost of such manufacturer's supervision shall be borne by the contractor.

3.26.03

Waterproofing Admixtures

The waterproofing admixture for concrete and cement mortar/plaster shall conform to IS: 2645. The admixture shall not cause decrease of strength of concrete/plaster at any stage and it shall be free from chlorides and sulphates. The admixture shall not affect the setting time by more than 5%. The maximum permissible dosage of admixture will be 3% (three percent) by weight of cement, but a lower dosage will always be preferred. The product shall be stored in strong moisture proof packings. However, in case of important structures where M25 or higher grade concrete is specified, the use of melamine based, high range water reducing concrete admixture shall be used to provide a waterproof concrete, For achieving high strength concrete having cement content around 400 kg/cu.m. a melamine based super plasticizer will be preferable.

- a) In concrete: The admixtures shall be procured from reliable and reputed manufacturers and approved by the Engineer. The method of application and other details shall conform to the manufacturer's specification and/or as instructed by the Engineer. The Contractor shall have the services of the manufacturer's supervisor at no extra cost to supervise the work, if desired by the Engineer.
- b) In Plaster: The concrete surface, to be plastered, shall be hacked to Engineer's satisfaction, cleaned thoroughly and kept wetted for 24 hours. The plaster shall be in cement sand mortar mixed in proportion varying from 1:1 to 1:4 by volume along with the approved waterproofing admixture and laid in appropriate thickness and in layers not exceeding 15 mm/layer or as per manufacturer's specification. The additive shall be of quality and type approved by the Engineer. If desired by the Engineer, the Contractor shall have the work supervised by the manufacturer's supervisor at no extra cost. On completion, the Plastered surface shall be cured continuously for a minimum period of 14 days like concrete.

3.26.04

Structural waterproofing

- a) Nozzles spaced as required after the concrete is completed shall be drilled



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 40 OF 56

into surfaces to be rendered watertight. Non-shrink cement grout with waterproofing compound as per manufacturers specifications shall be injected under pressure to seal all voids. Special care shall be taken at joints by providing additional nozzles. The pressure grouting shall be done on the internal surface.

b) External Treatment

Two layers of (1:4) plaster of 12 mm thick each with waterproofing compound as per manufacturer's specification shall be provided on outer surface of concrete underground structures.

3.26.05 Protective coating on Inside Surface.

Two coats of cement based two components polymer modified flexible protective and waterproofing slurry having 1 mm thick for each coat shall be applied on the walls/floor after proper surface preparation as mentioned above. The slurry shall be applied by brush.

3.26.06 Bitumen Felt: Application for Tanking

This specification shall cover laying the waterproof course on the outside and inside of the walls and bases of structures.

The materials shall conform to IS: 1322, and the workmanship to IS: 1609. The bitumen felt should be hessian base and/or fibre base as specified in Drawing. If required by the Engineer, tests as specified in relevant IS Codes shall be arranged by the Contractor without charging any extra to the Owner.

The Contractor shall execute this work in direct collaboration with one of the well-known specialized firm approved by the Engineer.

Cleaning the surface, keeping it dry, providing, necessary corner fillets and cement rendering and cutting chases, etc. shall be done as per drawings and/or instructions. If any protective brickwork on/against concrete sub-bases or walls are required, the same shall be provided. A twenty (20) years guarantee for satisfactory performances shall be given by the Contractor as well as his specialist sub-contractor jointly and severally, for this work. Free rectification of any defects noted in the work within this guarantee period will be carried out by the Contractor even if it is beyond the specified maintenance period of the contract as a whole.

3.26.07 Polyethylene Films: Application in Walls or base of structures

Waterproof treatment shall be applied as outlined and as per sequence given hereunder



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 41 OF 56

- i) the concrete surface shall be made smooth with 12 mm cement plaster 1:6.
- ii) apply hot bitumen 80/100 grade (IS: 73-1961) at the rate of 1.0 Kg/Sq.m minimum
- iii) lay black polyethylene film 250-micron (IS: 2508-1977) with cut back bitumen adhesive in overlaps over hot bitumen surface, gently pressed, taking care not to puncture the film.

Alternatively, the overlaps shall be heat sealed by an electric iron having three parallel sealing bars. A long piece of plywood is to be placed below the polyethylene film to be heat-sealed. On the plywood a rubber gasket is to be laid to provide a cushion for better welding of the film. On the rubber padding, a cellophane tape is to be spread and on this the LDPE film, with 100 mm overlap, is to be stretched. On the overlapped film another cellophane tape is to be placed to prevent the heat sealer from sticking to the LDPE film. After this, the electric iron is to be pressed on the overlap joint for sufficient time so as to allow perfect welding. The operation is to be repeated for subsequent lengths of joints. After heat-sealing, the cellophane tape is to be removed and the joints are to be tested for leaks.

- iv) Lay 100 gm brown craft paper laminated with a layer of straight run bitumen,
- v) Lay hot bitumen 80/100 grade (IS: 73-1961) at 1.0 Kg/Sq.m minimum.
- vi) Lay 250-micron polyethylene film as second layer similar to (iii) above.
- viii) Lay second layer of 100 gm. brown craft paper laminated similar to (iv) above.
- ix) Apply hot bitumen (straight run grade) to IS: 73-1961 at 1.0 Kg/Sq.m dusted with fine sand.
- x) Protecting with a layer of 75 mm plain cement concrete M-10, or a layer of brick laid in cement mortar 1:6 in case of wall apply a 12 mm thick plaster as shown on the drawing or a protective brick wall in 1:6 cement mortar as shown on the drawing.

3.27.00 Protective Coating on Concrete Surface

3.27.01 On Foundation

The outside faces of foundation of important structures will be protected from adverse effect of soil/underground water, if shown on drawing by using rubber/bitumen emulsion protective coating of approved manufacturer.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 42 OF 56

4.00.00 SAMPLING AND TESTING

4.01.00 General

The Contractor shall carry out all sampling and testing in accordance with the relevant Indian Standards and as supplemented herein for the following items at his own cost unless otherwise specified in this specification. The Contractor shall get the specimens tested in a laboratory approved by the Engineer and submit to the Engineer the test results in triplicate within 3 (three) days after completion of the test.

4.02.00 Cement

Representative samples will be taken from each consignment of cement received from the manufacturer/supplier for carrying out the tests for fineness (by hand sieving), setting time and compressive strengths as per guidelines of IS: 269. Soundness Tests may also be required to be carried out if required by the Engineer. The Contractor shall carry out the tests without any expense to BHEL. No cement from a particular consignment/batch will be used on the works unless satisfactory 3 (three) days and 7 (seven) days test results for compressive strength are known. The Engineer and Contractor will jointly associate themselves with the tests irrespective of whether they are carried out by the BHEL or the Contractor. These tests are of great importance, as their results will have a bearing on the acceptance of concrete or otherwise as per the terms and conditions of the Contract.

4.03.00 Aggregates

The contractor shall carry out any or all the tests on aggregates as may be required by the Engineer in accordance with IS: 2386 PARTS-I to VIII. The acceptance criteria of the samples tested shall be in accordance with the requirements of the relevant Indian Standards.

4.04.00 Water

Sampling and Testing of water being used for concrete works as per IS: 3550 will be carried out by the Contractor at regular intervals and whenever directed by the Engineer. The acceptance criteria will be as per IS: 456.

4.05.00 Admixture

4.05.01 Air Entraining Agents

Initially, before starting to use A.E.A., relationship between the percentage of air entrained and the cylinder cube crushing strength vis-a-vis quantity of A.E.A. used for all types of concrete will be established by the Contractor by carrying out sufficiently large number of tests. After that, at regular intervals



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 43 OF 56

and whenever directed by the Engineer, the Contractor will check up the actual percentages of air entrained and corresponding crushing strengths to correlate with the earlier test results.

4.05.02 Other Admixtures

Tests for establishing the various properties of any other admixtures, which may be required to be added, shall be carried out by the Contractor.

4.06.00 Concrete

The sampling of concrete, making the test specimens, curing and testing procedure etc. shall be in accordance with IS: 516 and IS: 1199, the size of specimen being 15 cm cubes. Normally, only compression tests shall be performed but under special circumstances the Engineer may require other tests to be performed in accordance with IS: 516. Sampling procedure, frequency of sampling and test specimen shall conform to IS: 456. To control the consistency of concrete from every mixing plant, slump tests shall be carried out by the Contractor every two hours or as directed by the Engineer. Slumps corresponding to the test specimens shall be recorded for reference. The acceptance criteria of concrete shall be in accordance with IS: 456. Concrete work found unsuitable for acceptance shall have to be dismantled and replacement is to be done as per specification by the Contractor at his own cost. In the course of dismantling, if any damage is done to the embedded items or adjacent structures, the same shall be made good, free of charge by the Contractor, to the satisfaction of the Engineer.

5.00.00 ACCEPTANCE CRITERIA

5.01.00 Standard Deviation

Standard deviation shall be based on test results and determination of Standard deviation shall conform to IS: 456.

5.02.00 Acceptance Criteria

The strength requirements and acceptance criteria shall conform to IS: 456.

5.03.00 Inspection and Core Tests

Inspection of concrete work immediately after stripping the formwork and core test of structures shall conform to IS: 456.

5.04.00 Load Test

Load tests of structural members as per IS:456 may be required by the Engineer, when the strength of test specimen results falls below the required



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 44 OF 56

strength.

If the member shows evident failure, the Contractor shall make the structure adequately strong free of cost to BHEL.

The entire cost of load testing shall be borne by the Contractor. If a portion of the structure is found to be unacceptable, it shall be dismantled and replaced by a new structure as per specification. The entire cost of dismantling and replacement and restoration of the site being borne by the Contractor.

If, in the course of dismantling, any damage is done to the embedded items and or other adjacent structures, the same will be made good, free of charge by the Contractor to the satisfaction of the Engineer.

6.00.00 RATES AND MEASUREMENTS

6.01.00 Cast-in-situ Concrete

6.01.01 Rates

- a) The unit rates shall include the cost of labour, materials, equipment, handling, transporting, botching, mixing, placing in position, vibrating, compacting, finishing, curing, testing, etc. at all elevations. This shall include the cost of curing by regular wetting or by using curing compound.
- b) The unit rates shall include for all working conditions including at locations under water, liquid, mud, in or under foul positions and extreme weather conditions.
- c) The unit rates for exposed concrete works (including machine foundations) shall include all incidentals, rendering, smoothening with carborandum stone, finishing with a paste of cement sand mortar, curing, etc.
- d) The unit rates shall include all arrangement for maintaining stability of structure during execution.
- e) Nothing extra shall be payable for the handling/mixing of extra cement on account of any reason or pouring of second stage concrete.
- f) Nothing shall be payable to the Contractor on account of facilities and arrangement provided by him for conducting ultrasonic pulse velocity (UPV) tests or other relevant tests to ascertain grade and quality, etc. of the concrete in case the concrete quality is in doubt and contractor has to establish the quality by further tests. In case of any defects, the Contractor shall rectify the same by cement/epoxy grout at his own cost.

However, mandatory UPV test as specified in the drawings shall be carried out including arrangement of all its facilities, staging, etc. and shall be



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 45 OF 56

payable to the contractor as per BOQ item.

- g) The unit rates for controlling of the temperature of concrete shall include storing and mixing of ice, water, cooling of aggregate etc.
- h) The quoted rate shall include the cost of MIX design, making of all trial mixes using admixtures and mixing in concrete etc. complete.

6.01.02 Measurements

- a) Actual volume of concrete work as executed or as per drawings issued, whichever is less shall be measured in cubic metres to the nearest two decimals.
- b) No deductions shall be made for the following:
 - i) Ends of dissimilar materials embedded inside for example, beams, posts, girders, rafters, purlins, trusses, corbels and steps upto 500 sqcm in cross section;
 - ii) Opening upto 0.1 sq.m.
 - iii) Volume occupied by reinforcement, sleeves, anchor bolts, and similar items.
 - iv) Volume occupied by pipes, conduits, sheathing, etc. not exceeding 100 sq.cm. each in cross sectional area.
- c) The concrete works of different grades; below and above ground floor finished level shall be measured separately, unless otherwise specified in the schedule of items. Accordingly rates shall be applied for concrete in foundation for concrete below ground floor finished level and concrete in superstructure for concrete above ground floor finished level.
- d) For temperature control measures, measurement shall be done in terms of quantity of concrete in cum. in concreting of which the ice have been used or cooling of aggregates has been done to keep the temperature of freshly laid concrete to less than 23°C.

6.02.00 Reinforcement

6.02.01 Rates

- a) The unit rates shall include for cover block, providing binding wire, welding, separator pieces between two or more layers of reinforcement required for keeping the steel in position, etc. at all elevations.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 46 OF 56

- b) No extra will be paid for transportation from stores, cleaning, straightening of steel, cutting, bending, binding with annealed wire, welding, tack welding, placing the reinforcement modification of already embedded reinforcement, if required, due to faulty fabrication or placement and other cost of tools and plants, materials, labours, return of unused steel to the store, etc.
- c) However, lap welding of reinforcement steel if permitted shall be paid under separate item as provided in the BOQ and no deduction for labour and binding wire saved for not providing lap length shall be made. Similarly, splicing of reinforcement bars using mechanical couplers if permitted shall be paid under separate item as provided in the BOQ and no deduction for labour and binding wire saved for not providing lap length shall be made.
- d) No extra shall be paid for preparing and getting approved bar bending schedules (including all revisions).
- e) Generally members are straight and have straight edges. However, for bending, binding, placing of reinforcement in any curved member in length or cross section or both, no extra payment shall be made.

6.02.02 Measurements

- a) Bar or any other type of reinforcement used like hard drawn steel wire fabric etc. for reinforced concrete shall be measured by weight in tonnes. The weight shall be arrived at by multiplying the actual or theoretical length measured alongwith standard hooks, cranks, bends, authorized laps, etc. whichever is less by the sectional weights. Claims for payment for this item shall be submitted with supporting documents giving the schedule of bars with sketches. The sectional weight to be adopted shall be IS Section weight. Nothing extra will be payable to the Contractor on account of, difference in weight, if any, due to different methods adopted for issue and measurement.
- b) Standard hooks, cranks, bends, authorised laps, supports, hangers and chairs which are covered in approved bar bending schedule shall be measured in tonnes.

6.03.00 Formwork and Staging

6.03.01 Rates

- a) The unit rates shall be inclusive of all staging, scaffolding, making the formwork watertight, etc. for all elevations and in all types of works.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 47 OF 56

- b) No separate payment shall be made for providing fillets, for rounding or chamfering at junctions, comers, etc.
- c) The unit rates shall include the cost of labour, materials etc. and the extra time, which shall be required for the removal of shuttering/ support for satisfactory completion of work.
- d) No extra payment shall be made on account of difficulty, wastage etc. for placement/removal of formwork between the network of closely placed steel beams or for the lacing/bracing portions and ribbed slab constructions.
- e) Payment for curved shuttering shall be made for curved members/wall whose centerline radius in plan is less than 6m.
- f) If the contact surface area in pockets is less than or equal to 0.1 sq.m. in each case, payment shall be done under item for providing formwork in pockets.

6.03.02 Measurements

- a) Formwork for different classes (types) shall be measured separately as the actual surface in contact with the concrete and paid on area basis unless included in the rate for concrete. The unit of measurement shall be in sq.m.
- b) Openings upto 0.1 sq.m or boxing left for inserts etc. for facility of Contractor's work, shall be neglected as if nonexistent for the purpose of formwork measurement of surface in which the openings occur.

For suspended floor, no deduction shall be made for flange area of secondary steel beams.

- d) No measurement shall be taken for the formwork in pockets, openings, chases, blockouts, etc. in concrete, the contact surface area is less than or equal to 0.1 sq.m. in each case.
- e) For pockets, if the contact surface area is less than or equal to 0.1 sq.m. in each case, measurement shall be done under item for providing formwork in pockets.
- e) Formwork, if required, for joints shown on drawing or instructed by the Engineer, shall be paid for the 'leading side' only.

6.04.00 Embedded Parts

6.04.01 Rates

- a) The unit rate for erection of embedded steel parts, supplied by Engineer



TECHNICAL SPECIFICATION FOR CEMENT CONCRETE (PLAIN & REINFORCED)

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 48 OF 56

shall include transportation from Owner's store to the place of work, erection & installation including setting material in concrete, etc. complete.

- b) The unit rate for MS pipe embedments and PVC pipe embedments shall include cutting, welding, fabrication, erection, embedding, and transportation to site. Unit rate shall also include the cost of the pipes.
- c) Rate for expansion fasteners shall include cost of fasteners, installation, and fixing including cost of washers and nuts and site testing if required.

6.04.02 Measurements

- a) The measurement of the embedded steel parts fabricated and installed by the Contractor shall be based on the calculated weight of steel sections in tonne corrected to second place of decimal.
- b) Embedded steel parts supplied by Owner and installed by Contractor Measurement shall be done for the net weight of the embedments installed in tonnes correct to second place of decimal.
- c) For PVC pipes/conduits, measurements shall be in quintals correct to second place of decimal for the net weight.
- d) For mild steel pipes, measurement shall be in quintals, correct to second place of decimal, for the net weight of the steel pipe supplied, fabricated, and installed.
- e) The lugs shall be measured in Kg. correct to second place decimal for the net weight.
- f) The expansion fasteners shall be measured in number according to tension capacity.
- g) The rails shall not be treated as embedded steel part and the track shall be measured in running metres along the centre line and paid for under separate item of work as specified in schedule of items. Other related civil items associated with the laying of track shall be measured separately and paid under respective items of works.

6.05.00 Groutings

6.05.01 Rates

Rate shall include the cost of surface preparation, admixtures, and curing.

6.05.02 Measurements:



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 49 OF 56

- a) Measurement shall be in cubic decimeters.
- b) Measurement for grouting shall be by volume of the block out, pockets or bolt hole upto the top surface of foundation concrete and shall be calculated from the dimensions shown on the drawings.
- c) Measurement for underpinning shall be by volume between the top surface of the foundation concrete and the underside of the base plate, the plan dimensions being as indicated on the drawings.
- d) No deduction shall be made for shims, bolts, shear keys and such other embedments.
- f) Pressure injection grouting with cement based grout if required as per drawing shall be applied at appropriate spacing to cover the desired surface area and measurement shall be made for the surface area grouted in sqm as per BOQ item. However in water retaining structures, the structural grouting if required to ensure water tightness shall not be payable separately as deemed to be covered in water retaining concrete item of BOQ.

6.06.00 Joints

6.06.01 Rates

The unit rate shall include all the activities described in the schedule of items.

6.06.02 Measurements

- a) Bitumen Board/Expanded polystyrene.

The measurement for bitumen board shall be based on actual finished surface area in square meters nearest to second decimal, for the specified thickness.

- b) Water Stops

The measurement for water stops shall be in running metres of actual length of the joint covered, for specified thickness, width, and shapes. No separate measurement shall be made for laps/splices for cross-joints and mitered joints.

- c) Metal Cover Strips

The measurement for Metal Cover Strips shall be based on actual finished surface area in square metres for the specified thickness.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 50 OF 56

d) Vibration Damping Resilient Pads

The measurement for this item shall be in square metres for the specified thickness, measured correct to the second place of decimal, of the actual finished surface area.

6.07.00 Dismantling/Demolishing Work – RCC and PCC and Chipping of Concrete

6.07.01 Rates

The unit rates shall include the cost of all necessary propping, shoring, underpinning scaffolding, safety measures, temporary enclosures, disposal/stacking of serviceable/unserviceable materials, etc. for all types of work and for all grades of concrete.

In the case of dismantling/demolishing work, the cutting of reinforcement shall also be included in the rate.

In the case of chipping work, the cutting of reinforcement shall be paid separately.

If the serviceable material including reinforcement steel from dismantled structure is allowed to be used/taken out by bidder, suitable rebate shall be given by bidder.

6.07.02 Measurements

- a) Dismantling of PCC and RCC work shall be measured in cu.m separately. Measurement of all work, except hidden work shall be taken before execution of work and no allowance for increase in bulk shall be allowed. Specifications for deductions of voids, openings etc, shall be done on the same basis as that applied for construction work.
- b) Chipping of concrete, making holes/pockets etc. shall be measured in cubic decimeters (i.e. 0.001 cu.m.).
- c) Cutting of reinforcement in chipping work for making of pockets and openings shall be measured in sq. cm. of cross-sectional area.

6.08.00 Precast Concrete

This clause shall be read in conjunction with relevant provisions specified elsewhere for cast in-situ Concrete.

6.08.01 Rates



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 51 OF 56

- a) The unit rate shall include cost of preparation of casting yard, formwork, concrete and its casting, finishing as specified, setting filling of gaps between adjacent pre-cast concrete units with concrete, or cement mortar, curing, handling, erection, grouting, welding, preparation of supporting surface, etc.

6.08.02 Measurements

The measurement of pre-cast concrete members shall be on the basis of volume of concrete in cubic metres nearest to second place of decimal. No deduction shall be made for volume occupied by reinforcement/inserts/sleeves and for openings up to 0.1 sq.m. The setting of element with cement mortar shall not be measured separately The filling of concrete cement mortar between the gaps of adjacent precast units shall be considered while computing the volume of pre-cast concrete work and shall be paid for under this item itself.

7.00.00 LIST OF IS CODES AND STANDARDS FOR REFERENCE

All work under this specification shall, unless specified otherwise, conform to the latest revisions and/or replacements of the following or any other Indian Standard Specifications and Codes of Practice. In case any particular aspect of work is not specifically covered by Indian standard Specifications, any other standard practice, as may be specified by the Engineer, shall be followed:-

- IS: 73 - Indian Standard Specification for Paving Bitumen
- IS: 216 - Indian Standard Specification for Coal Tar Pitch
- IS: 383 - Indian Standard Specification for Coarse and Fine Aggregates from Natural Sources for Concrete
- IS: 432 - Indian Standard Specification for Mild Steel and Medium Tensile Steel Bars and Hard Drawn Steel Wire for concrete Reinforcement
- IS: 455 - Indian Standard Specification for Slag Cement
- IS: 456 - Indian Standard Code of Practice for Plain and Reinforced Concrete
- IS: 457 - Indian Standard Code of Practice for General Construction of Plain and Reinforced Concrete for Dams and other Massive



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 52 OF 56

Structures

- IS: 516 - Indian Standard Specification for Methods of Test for Strength of Concrete
- IS: 702 - Indian Standard specification for industrial bitumen.
- IS: 1199 - Indian Standard Specification for Methods of Sampling and Analysis of Concrete
- IS: 1322 - Indian Standard Specification for Bitumen Felts for Waterproofing and Damp-proofing
- IS: 1489 - Indian Standard Specification for Portland Pozzolona Cement
- IS: 1566 - Indian Standard Specification for hard drawn steel wire fabric for concrete reinforcement.
- IS: 1609 - Code of Practice for Laying Damp-proof Treatment using Bitumen Felts
- IS: 1786 - Indian Standard Specification for High Strength Deformed Steel Bars and Wires for Concrete Reinforcement.
- IS: 1791 - Indian Standard Specification for Batch Type Concrete Mixers.
- IS: 1838 - Indian Standard Specification for preformed fillers for expansion joints in concrete pavements and structures (non-extruding and resilient type).
- IS: 2185 - Indian Standard Specification for Hollow Cement Concrete Blocks
- IS: 2210 - Indian Standard Specification for Design of Reinforced Concrete shell Structures and Folded Plates
- IS: 2386 - Indian Standard Specification for Methods of Test for Aggregates for Concrete - Part-I to VIII
- IS: 2502 - Indian Standard Code of Practice for Bending and Fixing of Bars for Concrete Reinforcement
- IS: 2505 - Indian Standard Specification for Concrete Vibrators, Immersion Type
- IS: 2506 - Indian Standard Specification for Screed Board Concrete Vibrators



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 53 OF 56

- IS: 2514 - Indian Standard Specification for Concrete Vibrating Tables
- IS: 2571 - Code of practice for laying in-situ cement concrete floors.
- IS: 2645 - Integral cement water proofing compound
- IS: 2722 - Indian Standard Specification for Portable Swing Weigh Batchers for Concrete (Single and Double Bucket type)
- IS: 2750 - Indian Standard Specification for steel scaffoldings.
- IS: 2751 - Code of Practice for Welding of Mild Steel Bars used for Reinforced Concrete Construction
- IS: 2770 - Indian Standard Specification for Method of Testing Bond in Reinforced Concrete
- IS: 3025 - Indian Standard specification for Methods of Sampling and Test (Physical and Chemical) for Water used in Industry
- IS: 3067 - Code of practice for general design details and preparatory work for damp proofing and water proofing of building.
- IS: 3201 - Indian Standard Specification for Design and Construction of Precast Concrete Trusses
- IS: 3370 - Indian Standard Specification for Code of Practice for Concrete Structures for Storage of Liquids
- IS: 3414 - Code of practice for design and installation of joints in buildings.
- IS: 3550 - Indian Standard Specification for Method of Test for Routine Control for Water used in Industry
- IS: 3558 - Code of Practice for use of Immersion vibrators for Consolidating Concrete
- IS: 3696 - Safety Code for Scaffolding and Ladders
- IS: 3812 - Indian Standard Specification for Fly Ash for Use as Admixture for Concrete
- IS: 4014 - Code of practice for steel tubular scaffolding.
- IS: 4031 - Indian Standard Specification for Method of Tests for



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 54 OF 56

Hydraulic Cement

- IS: 4082 - Indian Standard Specification for Recommendation on Stacking and Storage of Construction Materials at site
- IS: 4090 - Indian Standard Specification for Design of Reinforced Concrete Arches
- IS: 4634 - Indian Standard Specification for Method of Testing Performance of Batch-type Concrete Mixes
- IS: 4656 - Indian Standard Specification for Form Vibrators for Concrete
- IS: 4925 - Indian Standard Specification for Concrete Batching and Mixing Plant
- IS: 4926 - Indian Standard Specification for Ready Mixed Concrete
- IS: 4990 - Indian Standard Specification for Plywood for Concrete Shuttering work
- IS: 4991 - Indian Standard Specification for Blast Resistant Design of structure for Explosion above ground
- IS: 4995 - Indian Standard Specification for Design of Reinforced Part-I & II Reinforced Concrete Bins for the Storage of Granular and Powdery Materials
- IS: 4998 - Indian Standard Specification for Design of Reinforced Concrete Chimneys.
- IS: 5256 - Code of practice for sealing joints in concrete lining on canals.
- IS: 5512 - Indian Standard Specification for Flow Table for use in Tests of Cement and Pozzolan materials
- IS: 5513 - Indian Standard Specification for vacate Apparatus.
- IS: 5515 - Indian Standard Specification for Compaction Factor Apparatus.
- IS: 5525 - Recommendation for detailing of reinforcement in reinforced concrete works.
- IS: 5624 - Indian Standard Specification for foundation bolts.
- IS: 5751 - Indian Standard Specification for Precast Concrete Coping



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 55 OF 56

Blocks.

- IS: 5816 - Indian Standard Specification for Method of Test for Splitting Tensile strength of Concrete Cylinders.
- IS: 5891 - Indian Standard Specification for Hand operated Concrete Mixers.
- IS: 5892 - Indian Standard Specification for transit mixer and agitators.
- IS: 6452 - Indian Standard Specification for High Alumina Cement for Structural Use
- IS: 6909 - Indian Standard Specification for Super sulphated Cement
- IS: 6923 - Indian Standard Specification for Method of Test for Performance of Screed Board Concrete Vibrators.
- IS: 6925 - Indian Standard Specification for Method of Test for Determination of Water Soluble Chloride in Concrete Admixtures.
- IS: 7242 - Indian Standard Specification for Concrete Spreaders.
- IS: 7246 - Indian Standard Specification for Table Vibrators for Consolidating Concrete.
- IS: 7251 - Indian Standard Specification for Concrete Finishers.
- IS: 7293 - Safety code for working with construction machinery.
- IS: 7320 - Indian Standard Specification for Concrete Slump Test Apparatus.
- IS: 7861 - Indian Standard Specification for Recommended Practice Part-I&II for Extreme Weather Concreting.
- IS: 7969 - Safety Code for Storage and Handling of Building Materials.
- IS: 8041 - Indian Standard Specification for Rapid Hardening Portland cement.
- IS: 8112 - Indian Standard Specification for high strength Ordinary Portland Cement.
- IS: 8142 - Indian Standard Specification for Determining Setting time of concrete by Penetration Resistance.



**TECHNICAL SPECIFICATION FOR
CEMENT CONCRETE (PLAIN &
REINFORCED)**

SPECIFICATION NO. PE-TS-457-600-C002

VOLUME - II B

SECTION - D SUB SECTION - D2

REV.NO. 0 DATE : 19/12/2019

SHEET 56 OF 56

- IS: 8989 - Safety Code for Erection of Concrete Framed Structures.
- IS: 9012 - Recommended method for shotcreting.
- IS: 9013 - Indian Standard Specification for Method of Making, Curing, and determining compressive Strength of Accelerated-cured Concrete Test Specimens.
- IS: 9077 - Code of Practice for Corrosion Protection of Steel Reinforcement in RB and RCC Construction.
- IS: 9103 - Indian Standard Specification for Admixtures for Concrete.
- IS: 10262 - Recommended Guidelines for Concrete Mix Design.
- IS: 13311 - Non-destructive testing of concrete.
- SP: 34 - Handbook of concrete, reinforcement and detailing.



**TECHNICAL SPECIFICATION
FOR CARPENTRY AND
JOINERY**

SPECIFICATION NO. PE-TS-457-600-C003

VOLUME - II B

SECTION - D SUB SECTION - D3

REV.NO. 0 DATE : 19/12/2019

SHEET 1 OF 7

VOLUME: II B

SECTION - D

SUB-SECTION – D3

CARPENTRY AND JOINERY

SPECIFICATION NO. PE-TS-457-600-C003



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



**TECHNICAL SPECIFICATION
FOR CARPENTRY AND
JOINERY**

SPECIFICATION NO. PE-TS-457-600-C003

VOLUME - II B

SECTION - D SUB SECTION - D3

REV.NO. 0 DATE : 19/12/2019

SHEET 2 OF 7

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA	5
4.00.00	I.S. CODES	6
5.00.00	RATES AND MEASUREMENTS	6



**TECHNICAL SPECIFICATION
FOR CARPENTRY AND
JOINERY**

SPECIFICATION NO. PE-TS-457-600-C003

VOLUME - II B

SECTION - D SUB SECTION - D3

REV.NO. 0 DATE : 19/12/2019

SHEET 3 OF 7

CARPENTRY AND JOINERY

1.00.00 SCOPE

This section covers supply, fitting and fixing of timber frames to doors and windows with M S holdfasts, flush doors, windows, shutters, partitions, wall panelling, pelmets, shelves, furniture, etc. as shown in drawings, including a prime coat of approved paint, varnish, or fixing of decorative plastic laminate where called for. This shall also include the supply and fixing of all hardware and fixtures shown in drawing or specified.

2.00.00 INSTALLATION

2.00.01 Materials

a) Timber

Unless otherwise specified, all timber shall be best quality well seasoned CP teakwood free from large or loose knots, cracks or any other defects. All timber shall be treated with approved wood preservative before use, unless specified otherwise. The rough timber shall be approved by the Engineer before incorporating in the works and starting the carpenter's work.

b) Plywood

Plywood shall be of commercial quality or with decorative surface veneer. Unless specifically permitted otherwise, the adhesive used in plywood shall be phenol formaldehyde synthetic resin of BWP grade conforming to IS: 848.

c) Decorative Laminated Plastic Sheets

The colour, pattern, finish and texture shall be approved by the Engineer. The bulk supply shall be procured in full sheet sizes which will ensure the least number or joints in one surface.

d) Flush Doors

Flush doors shall be solid core doors with commercial or decorative faces and hardwood edges conforming to IS: 2202 (Part-1). The core for solid core doors shall be of block board or wood particle board. Manufacturer's literature and test certificates shall be submitted for the approval of the Engineer. The Contractor shall give a guarantee that the adhesive used is BWP grade phenol formaldehyde synthetic resin conforming to IS: 848. The thickness shall be as specified.



**TECHNICAL SPECIFICATION
FOR CARPENTRY AND
JOINERY**

SPECIFICATION NO. PE-TS-457-600-C003

VOLUME - II B

SECTION - D SUB SECTION - D3

REV.NO. 0 DATE : 19/12/2019

SHEET 4 OF 7

e) Panel Doors

Panel door shall be of teakwood shutter frame, unless otherwise noted and panels with teakwood/commercial ply/teakwood particle board. Other considerations shall be as mentioned in item (d) above.

f) Windows, Ventilators

Windows and ventilators shall made of teakwood shutter frame, unless specified otherwise and glazing of specified thickness shall be fixed with wooden beadings.

g) Fixtures

Fixtures for doors, windows, furniture etc. shall be as shown on drawing or specified.

2.02.00 Workmanship

2.02.01 General

The work shall be done by skilled carpenters as per details shown on drawing or instructed by the Engineer.

Framing timber and other work shall be close - fitting with proper wood joinery, accurately set to required lines or levels and rigidly secured in place. The surface of frames etc., which will come in contact with masonry after fixing, shall be given two coats of approved paint before fixing. Mastic caulking shall be done after fixing external door and window frames. Special care shall be taken to match the grain of timber or plywood, which will be subsequently polished. Screwing or nailing will not be permitted to the edge of plywood and particle board. The edge of all plywood, blackboard and particle board shall be finished with teakwood lipping unless otherwise shown on drawings.

Fixing to frames and partitions shall generally be with 40 mm x 6 mm x 300 mm long M S holdfasts bifurcated at end and grouted with 1:2:4 cement concrete. The gap between masonry and external door and window frame shall be caulked with polysulphide mastic. M.S. grills or guard bars shall be provided to windows where called for in the drawings.



**TECHNICAL SPECIFICATION
FOR CARPENTRY AND
JOINERY**

SPECIFICATION NO. PE-TS-457-600-C003

VOLUME - II B

SECTION - D SUB SECTION - D3

REV.NO. 0 DATE : 19/12/2019

SHEET 5 OF 7

2.02.02 Finish

All carpentry work after finishing shall be sand papered smooth. A prime coat paint shall be given after inspection of the Engineer to all surfaces other than those, which shall be subsequently polished or covered with laminated plastic sheet.

2.02.03 Surface Treatment

When shown on drawings or called for, decorative ply or laminated plastic sheets shall be bonded under pressure to the surface to be finished. The adhesive used shall be of brand and brought to site in sealed containers. The rate of application and the length of time for which the pressure is to be applied shall be as per the manufacturer's instructions. The edge of sheets shall be protected by teak lipping or bevelled as shown on drawings.

3.00.00 ACCEPTANCE CRITERIA

3.00.01 Door and Window Frames

All frames shall be square and flat at the time of delivery and shall be checked for dimensions and corner angles. After fixing they shall be on a fine vertical plane. All external door and window frames shall be caulked with mastic.

3.02.00 Door and Window Shutters

All doors and window shutters shall be of proper size, shape, and design and free of warp. When fixed to frames, these shall operate smoothly without jamming and all latching or locking devices shall engage properly without undue pressure.

3.03.00 Partitions, Paneling, Pelmet, Furniture, etc.

3.03.01 General

These shall conform to drawings in all details. No unsightly nail marks etc. shall be permitted. Plywood grains shall be matched to give a uniform and pleasing appearance.

3.03.02 Partition

Shall be checked for rigidity of fixing, plumb and horizontal as well as vertical alignment.



TECHNICAL SPECIFICATION FOR CARPENTRY AND JOINERY

SPECIFICATION NO. PE-TS-457-600-C003

VOLUME - II B

SECTION - D SUB SECTION - D3

REV.NO. 0 DATE : 19/12/2019

SHEET 6 OF 7

3.03.03 Pelmets

Shall be checked for rigidity of fixing and adequate clearance of fixture.

3.03.04 Cupboard Shutters

Shall operate smoothly without jamming and locks, bolts and double ball catches shall engage securely. Single ball catches shall not be used.

3.03.05 Drawers

Shall operate smoothly and have backstops to prevent them from being pushed too far. Locks shall engage securely.

3.03.06 Loose Furniture

When placed on a level surface, tables tops etc. shall be horizontal and the pieces stand stably on legs or supports.

4.00.00 IS CODES

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

IS: 848 - Synthetic resin adhesives for plywood (Phenolic and Aminoplastic)

IS: 1003 - Timber panelled and glazed shutters.

IS: 2191 - Wooden flush door shutter (Cellular and hollow core type).

IS: 2202 - Wooden flush door shutters (solid core type).

IS: 4021 - Timber door, window, and ventilator frames.

5.00.00 RATES AND MEASUREMENT

5.01.00 Rates

Rates shall include of all activities mentioned in "Schedule of Item" for completion of the work. No separate payment shall be made for fixing, caulking, application of primer coat, polishing, providing of butt hinges,



**TECHNICAL SPECIFICATION
FOR CARPENTRY AND
JOINERY**

SPECIFICATION NO. PE-TS-457-600-C003

VOLUME - II B

SECTION - D SUB SECTION - D3

REV.NO. 0 DATE : 19/12/2019

SHEET 7 OF 7

holdfasts, sliding/tower bolts, door stoppers, door closers and other fittings and fixtures.

5.02.00 Measurement

Measurement shall be done in Sqm for doors, windows, ventilators, shutters, partitions etc.

Measurement for wooden frame shall be in CuM.

Pelmets shall be measured in RM.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 1 OF 14

VOLUME: II B

SECTION – D

SUB-SECTION – D4

**ROOF AND UNDERGROUND STRUCTURES WATER
PROOFING, INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 2 OF 14

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA AND GUARANTEE	12
4.00.00	I.S. CODES AND STANDARDS	12
5.00.00	RATES AND MEASUREMENTS	13



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 3 OF 14

**ROOF AND UNDERGROUND WATER PROOFING,
INSULATION AND ALLIED WORKS**

1.00.00 SCOPE

This section covers furnishing, installation, repairing, finishing, curing, testing, protection, maintenance till handing over of roof and underground water-proofing, insulation and allied works for buildings and at locations covered under the scope of this package.

2.00.00 INSTALLATION

2.01.00 GRADING UNDERBED

The surface to receive the underbed shall be roughened and thoroughly cleaned with wire brush and water. Oil patches if any shall be removed with detergent. The surface shall be soaked with water and all excess water removed just before laying of the underbed.

The underbed shall not be laid under direct hot sun and shall be kept in shade immediately after laying so as to avoid quick loss of water from the mix and separation from the roof surface. The underbed shall be cured under water for at least 7 days.

The underbed shall be laid to provide an ultimate run off gradient not less than 1 in 120 and as directed by the Engineer. Upto an average thickness of 25mm the underbed shall usually be composed of cement and sand plaster. For higher thickness the underbed shall be made with cement concrete. The underbed shall be finished to receive the waterproofing treatment direct or insulation as the case may be.

2.01.01 Cement Mortar Underbed

The underbed grading plaster shall be average 25 mm thick maximum. It shall consist of cement and coarse sand in the ratio 1:4 nominal by volume. The sand and cement shall be thoroughly mixed dry and then water added. Each batch of mix shall be consumed before the initial set starts.

The plaster shall be fully compacted to the desired grade in continuous operation. The surface shall be even and reasonably smooth.

2.01.02 Cement Concrete Underbed

The underbed cement concrete shall be used where the subgrade is more than average 25 mm thick. It shall consist of cement concrete 1:2:4 nominal mix



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 4 OF 14

by volume with 12 mm down stone chips and coarse sand. The aggregate shall be mixed dry and minimum quantity of water shall be added to make the mix workable.

The mix shall be laid to proper grade, fully consolidated and surface shall be smooth and even.

2.02.00 INSULATION

The Tenderer shall, along with the tender, send specifications of insulating materials he proposes to use and the proposed method of laying. Before bulk supply, the contractor shall send samples of insulating material to the Engineer, and after approval of the samples, the Contractor shall procure and transport the bulk material to the site. Whenever asked by the Engineer, the Contractor shall furnish test certificates from testing laboratory on the insulating and other properties of the materials.

After laying the insulation, the surface shall be made ready as required to receive the waterproofing treatment. If any plastering is used it shall be not leaner than 1:4 cement sand by volume and not thinner than 12 mm and it shall be cured for seven days.

2.02.01 Foam Concrete

This shall be of lightweight foam concrete of average 50 mm thickness or as specified or as shown on drawings. This may be laid in situ in suitable panels or precast blocks. The insulating properties shall be such that the thermal conductivity shall not exceed 0.125 Kcl/sq.m. hr degree C. Before starting the laying of foam concrete samples shall be prepared at site and got tested for approval of the Engineer.

The foam concrete laid shall be sufficiently strong to withstand the usual workload and standard loads expected on the roof. Any damaged portion shall be removed and replaced forthwith. Approval of the Engineer shall be taken before laying the waterproofing over the insulation.

While laying the foam concrete, samples from each batch of the mix shall be kept for test if so desired by the Engineer.

2.02.02 Expanded Polystyrene Blocks

The expanded polystyrene block Insulation shall be fire retardant quality and shall have a maximum thermal conductivity of 0.026 Kcl m/sq.m h °C. It must be strong enough to withstand without any deformation under the workload and standard loads expected on the roof.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 5 OF 14

The Contractor shall lay the expanded polystyrene block as per manufacturer's approved specification. Only specifically experienced workers shall be used for this work. If the Engineer is not satisfied about the efficiency of the workers the Contractor shall secure manufacturers supervision at no extra cost to the Owner.

2.03.00 Fillets

Fillets at Junction of roofs and vertical walls shall be provided with the same insulating material as provided for the main roof insulation. The fillets shall be 150 mm x 150 mm in size unless otherwise shown on drawings or instructed by the Engineer.

Where there is no insulation over roof slab, fillets shall be cast-in-situ cement concrete (1:2:4) nominal mix volume.

2.04.00 Waterproofing Treatment

2.04.01 Bitumen Felt Treatment

Waterproofing treatment shall be laid by a specialist firm with long experience in the particular trade.

The waterproofing treatment for roofs with bitumen felts shall be done following relevant IS: 1346. Bitumen felt shall conform to IS: 1322 and Bitumen primer to IS: 3384.

The bonding materials shall consist of blown type conforming to IS: 702 or residual bitumen conforming to IS: 73 or a mixture of the two to withstand local conditions of prevailing temperature or gradient of roof surface. The Contractor shall convince the Engineer that the bonding material proposed to be used is suitable for the particular job.

The Contractor shall state the source from where he proposed to procure the materials. Samples of the self-finished felt shall be submitted in advance to the Engineer along with test certificates for his review. Test certificates for the bonding materials shall also be submitted and samples, if desired by the Engineer, shall be provided for confirmatory tests. Samples shall be submitted if instructed by the Engineer.

Minimum overlaps of 100 and 75 mm shall be given at the end and sides of strips of felt and properly bonded with bitumen. Joints in successive layers of felt shall be staggered.

Normal treatment with one layer of felt, heavy treatment with two layers of felt or Extra Heavy treatment with three layers of felt shall be indicated. Brief details of the various treatments shall be as follows:



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 6 OF 14

a) Normal Treatment - Five courses

- 1) Primer coat conforming to IS:3384 applied at the rate 0.27lits/sqm min.
- 2) Hot applied bitumen at the rate of 1.2 kg/sq.m. (min.)
- 3) Hessian base self finished felt, type 3, grade 1.
- 4) Hot applied bitumen at the rate of 1.2 kg/sq.m. (min.)
- 5) 20 mm thick pressed precast concrete tiles with 15 mm, thick 1:4 cement-sand mortar underbed.

b) Heavy Treatment - Seven Courses

With Hessian base felt

- 1) Primer coat conforming to IS:3384 applied at the rate 0.27lits/sqm min.
- 2) Hot applied bitumen at the rate of 1.2 kg/sq.m (Min.)
- 3) Hessian base self-finished felt, type 3, grade 1.
- 4) Hot applied bitumen at the rate of 1.2 kg/sq.m (Min.)
- 5) Hessian base self-finished felt, type 3, grade I.
- 6) Hot applied bitumen at the rate of 1.2 kg/sq.m (Min.)
- 7) 20 mm thick pressed precast concrete tiles with 15 mm thick 1:4 cement: sand mortar underbed.

or

With fiber base felt

- 1) Primer coat conforming to IS:3384 applied at the rate 0.27lits/sqm min.
- 2) Not applied bitumen at the rate of 1.2 kg/sq.m (Min.)
- 3) Fiber base self-finished felt, type 2, grade 2.
- 4) Hot applied bitumen at the rate of 1.2 kg/sq.m (Min.)
- 5) Fiber base self-finished felt, type 2, grade 2.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 7 OF 14

6) Hot applied bitumen at the rate of 1.2 kg/sq.m (Min.)

7) 20 mm thick pressed precast concrete tiles with 15 mm thick 1:4 cement: sand mortar underbed.

c) Extra Heavy Treatment – Nine courses

With fiber based felt

1) Primer coat conforming to IS:3384 applied at the rate 0.27lits/sqm min.

2) Hot applied bitumen at the rate of 1.2 kg/sqm. (min.)

3) Fiber-base self-finished felt type 2, grade 1.

4) Hot applied bitumen at the rate of 1.2 kg/sq.m (min.)

5) Fibre base self-finished felt type 2, grade 1.

6) Hot applied bitumen at the rate of 1.2 kg/sqm. (min.)

7) Fibre base self-finished felt type 2, grade 1.

8) Hot applied bitumen at the rate of 1.2 kg/sqm. (min.)

9) 20 mm thick pressed precast concrete tiles with 15 mm thick 1:4 cement: sand mortar underbed.

or

With Hessian base felt

1) Primer coat conforming to IS:3384 applied at the rate 0.27lits/sqm min.

2) Hot applied bitumen at the rate of 1.2 kg/sqm. (min.)

3) Hessian base self-finished felt, type 3, grade 1.

4) Hot applied bitumen at the rate of 1.2 kg/sqm. (min.)

5) Hessian base self-finished felt, type 3, grade 1.

6) Hot applied bitumen at the rate of 1.2 kg/sqm. min.

7) Hessian base self-finished felt, type 3, grade 1.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 8 OF 14

8) Hot applied bitumen at the rate of 1.2 kg/sqm. min.

9) 20 mm thick pressed precast concrete tiles with 15 thick 1:4 cement: sand mortar underbed.

However, in special cases, more courses, or a combination of fibre base and hessian base felts may be asked for.

The surface to receive the waterproofing treatment must be cleaned and dried satisfactorily and the Engineer's approval taken before starting the work. If any existing waterproofing treatment is being augmented the existing top course shall be completely removed and all damaged felts or other defects repaired.

The Engineer may instruct the Contractor to lay part of the stipulated courses at the first instant to be followed later on with the balance courses. This interim finish shall be done with a course of hot applied bitumen. While doing the balance again hot bitumen shall be applied to start with after repair of all damages to the already laid course.

After completion the surface shall be cleaned taking care that felt cuttings etc. do not find their way into rainwater down comers.

2.04.02

Elastomeric Membrane

a) Material

The material shall consist of high solid content Polyurethane based cold liquid applied coatings as per ASTM C836-89a comprising of urethane pre-polymers extended with flexible material, which cure by reaction with atmospheric moisture to give a continuous film which is rubbery and elastic or any other equivalent material permitted as per ASTM and approved by the Engineer. The material shall consist of high solid coating designed to give a high-build film. The material shall not be diluted. The coating shall have physical feature like high viscosity, 90% solids, high resistance to impact, abrasion and cracking, superior tensile strength, application limit of 70°C minimum, 300% elongation and forming a perfectly smooth permanently flexible seamless membrane which should have good adhesion to roof substrates (RCC, tiles, brick, and metals), having a minimum life of 10 years. It should also be resistant to acid (mild concentrated), alkalies and have a very low water absorption rate (0.5%) max. at ambient temp. after 7 days.

The pack shall not be older than 9 months after the date of manufacture and packing.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 9 OF 14

b) Primer coat

It shall consists of polyurethane (P.U.) or any other equivalent material. Primer coat shall be a special blend of moisture curing urethane pre-polymers in solvent. A single coat of this primer shall be applied by brush over the prepared bed as an adhesion coat of an application rate of minimum 6 sq.m per litre.

The primer shall be allowed to dry for minimum of 2hrs. time before the successive finishing coats of P.U. liquid membrane are applied.

c) Finishing coats :

The finishing coats shall consist of two successive liquid coatings of high solids content urethane pre-polymers or equivalent material to form an elastomeric membrane. The overall dry film thickness shall be 1.5mm subject to minimum 500 gm per sq.m per coat application rate.

Each coat shall be allowed to dry for minimum 12 hours before applying the next coat. The surface should be dry and smooth before application.

The coating shall be continued up the parapets/walls for a minimum of 150mm over the finished roof surface. It shall be continued into rain water pipes by atleast 100mm.

The final coat of P.U. liquid when tacky shall be sprinkled with the sand.

For edges, expansion joints and any vulnerable points a later of polyscrim cloth /fabric to be embedded between 2 finishing coats.

d) Surface Finish :

Areas of roof treatment which are vulnerable to accidental damage shall be provided with wearing course consist of minimum 20 mm thick PCC of Grade M15 (using 12.5mm size aggregate) cast in panel of maximum size of 1.20m x 1.20m and reinforced with 0.56mm diameter galvanised chicken wire mesh and sealing of joints using sealant or elastomeric compound.

When the roof surface is subjected to foot traffic or used as a working area, a cement mortar (1:4) shall be applied over the top most layer of roofing treatment. Over this, a layer of chequered cement concrete flooring tiles conforming to IS:13801 shall be provided in place of stone grit and cement painted. The tiles shall be laid as per IS:1443.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 10 OF 14

2.04.03

Waterproofing By Epoxy Resin Based Application

Exposed surfaces of cement concrete, lime concrete or brickwork to be treated for waterproofing by the resin-based application shall be thoroughly cleaned and the epoxy resin based material to be applied as directed by the manufacturer. The material shall not have any adverse effect on the surface on which it is applied and must stick to it uniformly to make a strong durable bond. It shall not be affected by short duration fire, sun exposure, and light duty traffic. The application shall be resistant to growth of fungus and proof against saltpetre action. If desired by the Engineer, a sample shall be prepared in advance and tested for waterproofness for 48 hours under 300 mm depth of standing water. The Contractor shall arrange the demonstration by providing free the materials and labour for the application as free of cost to Owner. This item shall carry a guarantee as specified.

2.04.02

Flashing

Unless otherwise stated flashing shall be done in the same way as the waterproofing except that the last layer shall be finished with two coats of bituminous primer. The flashing shall be extended up the vertical surfaces as shown on drawing. The flashing shall end in grooves in vertical walls. The grooves shall be at least 65 mm deep and caulked with waterproof mastic cement. The minimum overlap with horizontal roofing felt shall be 100 mm.

Where specified or directed by the Engineer, metal flashing shall be provided. The materials shall be 18 Gage or 22 G G.I. sheets, as specified or as directed by the Engineer.

2.05.00

WATER-PROOFING OF UNDERGROUND STRUCTURES

Basements, ducts, pits, tunnels (excluding tanks) etc below the ground water table and in contact with soil are covered under this. Bonding material shall be blown bitumen of 65/25 grade conforming to IS: 702.

Waterproofing shall be provided on the outside of walls and top of RCC slab and shall be carried out upto 150mm above ground level. The number of layers of bitumen felt to be used for walls and floor unless otherwise shown in the drawing shall be:

- a) 2 layers - for depths up to 5m below ground level
- b) 3 layers - for depths beyond 5m below ground level

2.05.01

Method of laying the bitumen felts and workmanship shall be as per IS: 1609 and IS: 3067. Water proofing work shall be taken in hand only when the sub-soil water level is at its lowest; the site shall be kept dry by adequate arrangements for pumping out water till the work has been completed.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 11 OF 14

For this purpose drains shall be formed along the edges of the excavation but beyond the building line, with suitable collecting sumps.

In case of large excavation areas where it is necessary to dewater under the floor, additional land drains shall be formed across the excavation, to adequately drain the area.

Adequate arrangement shall be made to protect the sides of excavation from slipping while the work is in progress.

The base concrete or mud-mat shall be rendered smooth by a 20mm thick sand-cement plaster (6:1). Any sharp edges/corners, over which the waterproofing course is to be laid, shall be eased out by means of cement.

The surface must be dry before the next operation is carried out.

Water proofing/damp proofing treatment:

A) Heavy Treatment (Two layers of felt)

- i) Primer (For vertical faces only), as per I.S. 3384.
- ii) Hot applied blown bitumen at the rate of 1.2 Kg/m²
- iii) Hessian base, bitumen felt type 3 grades 2
- iv) Hot applied blown bitumen @ 1.2 Kg/m²
- v) Hessian base, bitumen felt type 3 grade 2
- vi) Hot applied blown bitumen @ 1.2 Kg/m²

B) Extra Heavy treatment (Three layers of felt)

- i) Primer (for vertical faces only) as per I.S. 3384
- ii) Hot applied bitumen at the rate of 1.2 Kg/m²
- iii) Hessian base bitumen felt type 3 grades 2
- iv) Hot applied bitumen at the rate 1.2 Kg/m²
- v) Hessian base bitumen felt type 3 grades 2
- vi) Hot applied bitumen at the rate of 1.2 Kg/m²



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 12 OF 14

vii) Hessian base bitumen felt type 3 grades 2

viii) Hot applied bitumen at the rate of 1.2 Kg/m²

The surface must be dry before the next operation is carried out at each stage said above.

The laying of felt over the bitumen so applied that it shall always commence on the floor, and shall be carried over to the walls only after treatment of the floor is complete. The minimum over lapping at sides and ends of strips shall be 10cm. Point for subsequent layers completely sealed by blow lamp.

A protective flooring of either brick flat in cement mortar (1:3) or 6cm thick cement concrete (M 15) or a coat of cement plaster (1:3) 4 cm thick shall be constructed over the bitumen layers to prevent damage to the latter during subsequent construction of the structural floor.

The walls shall be treated in a similar way; the bitumen felts joining at the base with the projecting felt laid over the mud-mat. The wall surface shall be made smooth where necessary with a coat of cement plaster (1:3), the felts laid as for the floor, ensuring that the surface to be treated is dry and then a protective brick wall, 12.5 cm nominal thickness shall be built in cement mortar (1:3) over the projecting mud-mat, the space between the wall and felt being grouted with cement.

3.00.00

ACCEPTANCE CRITERIA AND GUARANTEE

The surface level shall be such as to allow quick draining of rains without leaving any pool anywhere. The finishing course shall be fully secured and shall have an even density. There shall not be any bubble formation or crushed or squeezed insulation or underbed.

The contractor shall give a guarantee in writing for all works executed under this specification supplemented by a separate and unilateral guarantee from the specified agency for the roof waterproofing treatment work. The guarantee shall be for materials and workmanship as under:

For Bitumen Felt Treatment under clause no. 2.04.01: 5 years in case of normal treatment, 10 years for heavy treatment and 20 years for extra heavy treatment.

For Elastomeric Membrane under clause no. 2.04.02: 10 (ten) years

In case guarantee is more stringent in owner specification, more stringent guarantee shall be applicable. The mode of execution of the guarantee shall be such, which shall be acceptable to the Owner.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 13 OF 14

4.00.00

I.S. CODES AND STANDARDS

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

- a) IS: 73 - Paving Bitumen
- b) IS: 702 - Industrial Bitumen
- c) IS: 1203 - Methods of testing tar and bitumen
- d) IS: 1322 - Bitumen felts for waterproofing and damp proofing.
- e) IS: 1346 - Code of practice for waterproofing of roofs with bitumen felts.
- f) IS: 1609 - Damp-proofing Treatment using Bitumen Felts – Code of Practice
- g) IS: 3067 - Code of practice for General design details and preparatory work for Damp-proofing and waterproofing of buildings
- h) IS: 3384 - Bitumen primer for use in waterproofing and damp proofing.

5.00.00

RATES AND MEASUREMENT

5.01.00

Rates

Rates shall be for complete work, including the cost of all materials and labour, as detailed in the specification unless any portion is specifically excluded in the “Schedule of Items”.

No extra shall be paid for finishing around opening, sleeves, pipes, ducts, inserts, etc.

No separate payments shall be made for cleaning of surface, treating of cracks and surface preparation.

5.02.00

Measurement

The finished work shall be measured in Sqm of actual surface area for the purpose of payment.



**TECHNICAL SPECIFICATION FOR
ROOF AND UNDERGROUND
STRUCTURES WATER PROOFING,
INSULATION AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C004

VOLUME - II B

SECTION - D SUB SECTION - D4

REV.NO. 0 DATE : 19/12/2019

SHEET 14 OF 14

No deduction shall be made and no extra shall be paid for openings upto 0.4 sqm.



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005

VOLUME - II B

SECTION - D | SUB-SECTION – D5

REV.NO. 00 DATE 20/12/2019

SHEET 1 OF 15

VOLUME: II B

SECTION - D

SUB-SECTION – D5

METAL DOORS, WINDOWS, VENTILATORS, LOUVERS ETC.

SPECIFICATION NO. PE-TS-457-600-C005



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005

VOLUME - II B

SECTION - D | SUB-SECTION – D5

REV.NO. 00 DATE 20/12/2019

SHEET 2 OF 15

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA	8
4.00.00	INFORMATION TO BE SUBMITTED	9
5.00.00	I.S. CODES	10
6.00.00	RATES AND MEASUREMENTS	10
ATTACHMENT		
ANNEXURE – A	SCHEDULE OF FIXTURES	12



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005
VOLUME - II B
SECTION - D | SUB-SECTION – D5
REV.NO. 00 DATE 20/12/2019
SHEET 3 OF 15

METAL DOORS, WINDOWS, VENTILATORS, LOUVERS ETC.

1.00.00 SCOPE

This section covers supplying and/or erecting and installing of all metal doors, windows, ventilators, louvers, glazed partitions, etc. The scope of work shall also include the assembly and erection of all doors, windows, louvers, glazed partitions, etc. Supplying and/or fixing of all door and window accessories and hardware are also included in the scope.

2.00.00 INSTALLATION

2.01.00 Materials

Steel sections used for fabrication of doors, windows etc. shall be standard rolled steel sections specified in IS: 1038 and IS: 1361 or as specified.

Steel sheets for frames, shutters, louver blades etc. shall be of gauge mentioned in drawings and schedules.

Aluminium sections for fabricating doors, windows, partitions etc. shall be extruded sections conforming to IS:733 or IS:1285 or as manufactured by Indian Aluminium Company Limited or approved equivalent. Aluminium door, windows and ventilator shall be fabricated as per IS:1948 and IS:1949. The alloy used shall conform to IS Designation HE 9-WP of IS: 733.

Hardware and fixtures shall be as specified and the best quality from approved manufacturers shall only be used. The tenderer shall specifically state the particular manufacturer's materials he proposes to use. Improper alignment or faulty operation due to inadequate strength of hardware or fixture shall entirely be the Contractor's responsibility.

All hardware and fixtures shall be able to withstand repeated use. Door closures shall conform to IS: 3564 and shall be suitable for doors weighing 61-80 Kg. unless otherwise stated. Each closer shall be guaranteed against manufacturing defect for one year and any defect found within this period shall be rectified or shall be replaced free of charge. Concealed door closers shall be either floor mounted or transom mounted, suitable for installation with metal doors. It shall conform to the performance Requirements and endurance test stated in IS: 3564 - Appendix-A. The Contractor shall submit samples of each type of hardware to the Engineer. The approved samples shall be retained by the Engineer for comparison of bulk supply. The samples shall be returned to the Contractor towards end for incorporation in the job. The mastic for caulking shall be of best quality from a manufacturer approved by, the Engineer. In general, mastic for fixing of metals frames shall be as per IS: 1081 or as approved by the Engineer.



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005
VOLUME - II B
SECTION - D | SUB-SECTION – D5
REV.NO. 00 DATE 20/12/2019
SHEET 4 OF 15

2.02.00 Fabrication

2.02.01 Steel Doors, Windows, Ventilators, louvers etc.

a) Door Frames

Frames shall be fabricated from 16 gage(G) sheets. They shall, be mortised, reinforced, drilled, and tapped for hinge lock and bolt strikes. Where necessary, frames shall be reinforced for door closers. Welded construction with mitered Corners shall be used. Rubber door silencers shall be furnished for the striking jamb. Loose “T” masonry anchors shall be provided. Frames shall finish flush with floor and adjustable floor anchors shall be installed. Frames shall be brought to site with floor ties/weather bars installed in, place.

b) Double Plate Flush Door Shutters

Door shutters shall be 45 mm thick, completely flush design and shall comprise of the outer sheets or 18 G steel sheets, rigidly connected and reinforced inside with continuous vertical 20 G stiffeners, spot welded in position at not more than 150 mm on centres.

Both edges of doors shall be joined and reinforced full height by steel channels placed immediately inside and welded to the door faces. Top and bottom of doors shall be reinforced horizontally as shown on drawing by steel channels running full width of door. Doors shall not have more than 2.5 mm clearance at jambs and heads, shall have proper level on lock stiles and rails to operate without binding, and shall be reinforced at corners to prevent sagging or twisting. Pairs or double doors shall have meeting-stile edges bevelled or rebated. Where shown on drawing, or called for in the schedule of items, the doors shall be sound deadened by filling the inside voids with mineral wool or other suitable approved materials.

Doors shall be mortised, reinforced, drilled, and tapped in shop for hinges, locks, and bolts. They shall also be reinforced for closers, push-plates, and other surface hardware where necessary. Any drilling and tapping required for surface hardware shall be done at site. Where shown drawing, provision shall be made for fixing glazing, vision panels, louvers etc. glazing mouldings shall be of 18 G steel or extruded aluminium sections and suitable for fixing 6 mm. glass. Louvers blades shall be V or Z shaped and made out of 16 G sheets.



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005

VOLUME - II B

SECTION - D | SUB-SECTION – D5

REV.NO. 00 DATE 20/12/2019

SHEET 5 OF 15

c) Single Sheet Door Shutters

Single sheet doors shall be made from best quality 18 G mild steel sheets, and shall present a flush surface on the outside. The inside shall be stiffened with semi tubular edge and central stiffening rail, which shall convey the lock and other fixture. The frames shall be made from best quality, 16 G mild steel sheets.

Wherever required, provisions for fixing glass panes, louvers etc. shall be made.

The manufacturing shall be done as specified in 2.02.01 (b) “Double Plate Flush Door Shutters.”

d) Sliding Door

Sliding doors shall be either double plate or single plate Construction made out of 18 gauge steel sheets with adequate stiffeners. The contractor shall specify the weight of the door in his shop and submit the manufacturer's catalogue of the sliding gear he proposes to use. Where called for the Contractor shall make provision for openings to the door for monorail beams. Doors shall close positively to exclude rainwater from seeping in. When called for, sliding doors shall withstand specified wind loads without buckling or jamming. The door shall slide freely under all ambient conditions.

e) Door Threshold

Door threshold shall be provided. Doors without threshold shall have bottom tie of approved type.

f) Steel Windows, Sashes, and Ventilators etc.

These shall conform in all respects to IS: 1038 and IS: 1361 latest editions. The details as called for in the above codes shall be applicable for coupling mullions, transoms, weather bars, and pivot arrangements for ventilators, etc. or as called for. All welds shall be dressed flush on all exposed and contact surfaces. Where composite unit openings are required the individual window units shall be joined together with requisite transoms and mullions. All windows shall be outside glazed, fixed with putty or metal glazing beads as specified. Where aluminium glazing beads are specified, they shall be extruded aluminium channel 9.5 mm x 9.5 mm x 1.6 mm (Indal Section No. 2209) unless otherwise shown on drawings. Aluminium beads shall be given one coat of zinc chromate primer before fixing to windows.



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005
VOLUME - II B
SECTION - D | SUB-SECTION – D5
REV.NO. 00 DATE 20/12/2019
SHEET 6 OF 15

2.02.02 Aluminium Door, Windows, and Frames

Extruded sections shall have a minimum 3 mm wall thickness. All sections shall be approved by the Engineer before fabrication is taken up. Doors frames, mullions, transom etc. shall be anodized in a bath of sulphuric acid to provide a clear coating of minimum 15 micron thickness. The anodized materials shall then be sealed by immersing in boiling water for 15 minutes. A protective transparent Coating shall be applied to the sections before shipment from the factory.

All work shall be fitted and shop assembled to a first class job, and ready for erection. Shop joints shall be made to hair lines and then welded or braced by such method as will produce an uniform colour throughout the work. Work on the above, other than described, shall be carefully fitted and assembled with neat joints with concealed fasteners. Wherever possible, joints shall be made in concealed locations and on edges of doors. Field connections of all work may be made with concealed screws or other approved type of fasteners. Glazing beads shall be snap fit type without visible screws and shall be of sizes to accommodate 6 mm thick glazing. All work shall be adequately braced and reinforced as necessary for strength and rigidity.

2.03.00 Shop Coat or Paint

The shop Paint for steel doors, windows etc. shall be best lead or zinc chromate primer paint from, approved manufacturer. All surfaces shall be thoroughly cleaned of rust, grease, loose mill scales etc. and given one coat of shop paint. Portions like mullions, transoms etc. that will be inaccessible after assembly of units shall be given an extra coat of paint before assembly.

Where called for, all steel doors, windows, etc. shall be hot dip galvanized to give a coating weight of 1½ - 2 oz. per sqft. One coat zinc chromate primer coat shall then be applied as shop paint.

Portions of aluminium frame, which come in contact with masonry construction shall be (before shipment from workshop) protected with a heavy coat of alkali resistant paint. Aluminium coming in contact with other incompatible metals shall be coated with zinc chromate primer.

2.04.00 Handling & Storage of Fabricated Material

All metal doors, windows, etc. shall be packed and crated properly before dispatch, to ensure that there will be no damage to the fabricated materials. Loading into wagons and trucks shall be done with all care to ensure safe arrival of materials at site in undamaged condition.

When taking delivery of items supplied by Owner, the Contractor shall satisfy



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005
VOLUME - II B
SECTION - D | SUB-SECTION – D5
REV.NO. 00 DATE 20/12/2019
SHEET 7 OF 15

himself that the items supplied are up to the specified standard. Any defect detected shall promptly be brought to the notice of the Engineer.

All metal doors, windows etc. shall be stored under cover in a way to prevent damage or distortion. Special care shall be taken to prevent staining of aluminium products by rust, mortar etc.

2.05.00 Assembly & Erection at Site

In general, the fixing of steel doors, windows, ventilators, louvers, etc. shall conform to IS: 1081. The Contractor shall assemble and install all steel doors, windows, sashes, fixed metal louvers, etc. including transoms and mullions for composite units in respective places, keening proper “Lines and levels”, and in approved workmanlike manner, to give trouble free and leak-proof installations. Installation shall be done according to instructions of the manufacturer, and/or as approved by the Engineer. If required by the Engineer, the installation shall have to be carried out under the supervision of the manufacturer's staff. The Contractor shall take all precaution against damage of the components during installation. Necessary holes, chases, etc. required for fixing shall be made by the Contractor and made good again as per original, after installation, without any extra charge.

After installation of steel doors, windows, etc. all abrasions to shop-coat of paint shall be retouched and made good the same quality of paint used in shop coat.

All coupling mullions, transoms, frames, etc. in contact with adjacent steel and other members, shall be well bedded in mastic. The Contractor shall bring to the site the cement in original sealed containers of manufacturer and shall apply it as per the instruction. For all frames supplied by either the owner or the Contractor, mastic shall be supplied by the Contractor and caulking done properly as per drawings, specifications and as per instructions of the Engineer.

Door shutters, partitions hardware fixtures etc. shall be fixed only after major equipments have been installed in rooms.

Wherever required, nylon cords of approved quality shall be supplied along with pivoted sashes and shall be of adequate length to terminate one metres from the floor. Loose ends of cords shall end in metal or plastic pull as approved by the Engineer.

2.06.0 Fire proof Door

Fire proof doors shall be provided at all fire exit points as specified and also to restrict the spread of fire within buildings whether from internal fire or from external fire. The construction details of door shall conform to the



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005
VOLUME - II B
SECTION - D | SUB-SECTION – D5
REV.NO. 00 DATE 20/12/2019
SHEET 8 OF 15

requirements stipulated in IS:3614(Part-1). Doors shall comply with the testing requirement mentioned in IS:3614 (Part-2). The doors shall be approved by Tariff Advisory Committee and shall have minimum 2 hrs. fire rating.

Metal covered (on both sides) Doors having insulating core filled up with mineral wool shall be used at all fire exit points and shall open out side.

All necessary accessories and hardware shall also be supplied along with doors. Fire proof door shall be provided with zinc silicate primer (minimum DFT 75 micron) after blast cleaning the surface to near white metal surface and shall be finished painted with epoxy based painting.

3.00.00 ACCEPTANCE CRITERIA

3.01.00 For fabricated Items

- a) Overall dimensions shall be within ± 1.5 mm of the size shown on drawings.
- b) Mullions, transoms etc. shall be in one length and permissible deviations from straightness shall be limited to ± 1.5 mm from the axis of the member.
- c) Door and window shutters shall operate without jamming. The clearance at head and jamb for door shutters shall not exceed 1.5 mm for double leaf doors; the gap at the meeting stiles shall not be more than 1.5 mm.
- d) Door leaves shall be undercut where shown on drawings.
- e) Doors, windows, frames, etc. shall be on a true planes, free from warp or buckle.
- f) All welds shall be dressed flush on exposed and contact surfaces.
- g) Correctness of location and smoothness of operations of all shop installed hardware and fixtures
- h) Provision for hardware and fixtures to be installed at site.
- i) Glazing beads shall be cut with mitered corners.
- j) Glazing clips, fixing devices etc. shall be supplied in adequate numbers.
- k) Shop coats shall be properly applied.
- l) Exposed aluminum surfaces shall be free from scratches, stains, and discoloration. Anodized surfaces shall present a uniform and pleasing look.



TITLE:

**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005

VOLUME - II B

SECTION - D | SUB-SECTION – D5

REV.NO. 00 DATE 20/12/2019

SHEET 9 OF 15

3.02.00 For installed Items

- a) Installations shall be at correct location, elevation and in general, on a true vertical plane.
- b) Fixing details shall be strictly as shown on drawings.
- c) Assembly of composite units shall be strictly, as per drawings with mastic caulking of transoms and mullions, gaskets, weather strips etc. complete.
- d) All frames on external walls shall be mastic caulked to prevent leakage through joint between frames and masonry.
- e) All openable section shall operate smoothly without jamming.
- f) Locks, fasteners etc. shall be engage positively. Key shall, be non-interchangeable.
- g) Cutting to concrete or masonry shall be made good and all abrasions to shop paint shall be touched up with paint of same quality as shop paint.
- h) Aluminium doors, windows, etc. shall be free from scratches stain or discoloration.

4.00.00 INFORMATION TO BE SUBMITTED

4.01.00 With Tender

- a) Names of manufacturers for Doors, windows etc.
- b) Manufacturer's catalogue for all hardware and fixtures proposed to be used.

4.02.00 After Award

- a) Before starting fabrication of all metal doors, windows, etc. the Contractor shall submit detailed fabrication drawings to the Engineer for approval. The fabrication shall be started only after approval of drawings.
- b) He shall submit a programme of work to be done for the approval of the Engineer.
- c) Before bulk supply, he shall submit for the approval of the Engineer samples of all bought out items and samples of each type of fabricated items. The samples shall be retained by the Engineer for comparison of bulk supply and returned to the Contractor towards the end for final incorporation in the job.



TITLE:

**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005

VOLUME - II B

SECTION - D | SUB-SECTION – D5

REV.NO. 00 DATE 20/12/2019

SHEET 10 OF 15

5.00.00**IS CODES**

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

Specification for Wrought Aluminium and Aluminium Alloy bars, rods and sections (for general engineering purpose) - IS: 733

Specification for Wrought Aluminium and Aluminium Alloy, extruded round tube, hollow section (for general engineering purpose) - IS: 1285

Steel doors, windows, and ventilators - IS: 1038

Steel windows for industrial, building - IS: 1361

Aluminium doors windows, and ventilators - IS: 1948

Aluminium windows for industrial buildings - IS: 1949

Steel doorframes - IS: 4351

Code of practice for fixing and glazing of Metal (steel and aluminium) doors, windows and Ventilators. - IS: 1081

Specification for Fire-check Doors – Part 1: Plate, Metal covered and Rolling type - IS: 3614

Hot Rolled Steel Sections for Doors, Windows and Ventilators – Specification - IS: 7452

6.00.00**RATES AND MEASUREMENT****6.01.00****Rates**

Rates shall be applicable of all elevation. Rates shall include preparation of working drawings (if required), supply of material, fixtures, gaskets, erection of unit, caulking and jamming of frames, including cutting/drilling/welding, grouting, grinding, making good of the structure for installing the unit etc. complete as per “Schedule of Items”.



TITLE:

**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005

VOLUME - II B

SECTION - D | SUB-SECTION – D5

REV.NO. 00 DATE 20/12/2019

SHEET 11 OF 15

Rates shall also include cost of surface preparation, application of primer, enamel painting or anodizing as applicable.

Rate for fire proof door is inclusive of providing insulation core, primer, shop painting (epoxy based), all hardware as specified in Schedule of items.

6.02.00 Measurement

Supply and installation of doors, windows, and ventilators shall be measured in Sqm or Kg as per BOQ item. If measured in sqm, it shall be for net outer to outer (excluding frame) area of doors, windows, and ventilators of each type used as described in “Schedule of Items”. Frame for steel or aluminium shall be measured in Kgs. Wooden frames shall be measured in Cum. Measurement for aluminium partition frames shall be in Kg. Panelling and glazing shall be paid separately if not covered in BOQ item description.

Measurement for fire proof door shall be in SqM in net area outer to outer of the door.



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005

VOLUME - II B

SECTION - D | SUB-SECTION - D5

REV.NO. 00 DATE 20/12/2019

SHEET 12 OF 15

ANNEXURE-A

SCHEDULE OF FIXTURES

A. TIMBER DOORS

1. For single leaf panel/flush doors

- i) 100 mm brass butt hinges with screws - 3 Nos.
- ii) 150 mm brass tower bolts with screws - 1 No.
- iii) 100 mm x 225 mm clear plastic push
Plate with counter sunk brass screws - 1 No.
- iv) 30 mm brass ring pull handle with
Plates and screws - 1 No.
- v) 150 mm brass coat hook with screws - 1 No.

vi) Heavy duty, cylinder looks on active leaf - for flush door. For door-closure, see "Door Schedule".

B. ALUMINIUM DOORS

1. For double leaf door

- i) Concealed hanging arrangement for door leaves.
- ii) Concealed two points bolt encasing simultaneously at head and threshold
on inactive leaf, operable from inside.
- iii) Heavy duty, cylinder look on active leaf.
- iv) Pull handle of approved design on both leaves.
- v) Doors stops for both leaves.
- vi) Overhead door closure for both leaves.



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005
VOLUME - II B
SECTION - D | SUB-SECTION – D5
REV.NO. 00 DATE 20/12/2019
SHEET 13 OF 15

ANNEXURE-A

C. STEEL DOORS AND WINDOWS

1. Doors

a) Double leaf doors

- i) 100 mm butt hinges - 3 Nos. on each leaf.
- ii) 300 mm aluminum tower bolt - 2 Nos. (top and bottom)
On inside of inactive
Leaf. 1. No. (Top only)
On inside active leaf.
- iii) 200 mm anodized aluminum
pull handle - 1 No. of each leaf.
- iv) Door stop of approved design - 1 No. of each leaf.

NOTE: For locks, door closure and threshold, see "Door Schedule".

b) Single leaf doors

- i) 100 mm butt hinges - 3 Nos.
- ii) 300 mm aluminum tower bolt - 2 Nos. top & bottom of Inside
face
- iii) 200mm anodised aluminum
Pull handle - 1 No.
- iv) Door stop of approved design - 1 No.

NOTE: For locks, door closures and threshold, see "Door Schedule".

2. Windows, Ventilators, etc.

a) Side Hung Windows

- i) Hinges - As per standard Practice of the
Manufacturer, but minimum two
hinges Per leaf.
- ii) 12" peg stays - 1 No. per leaf



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005

VOLUME - II B

SECTION - D | SUB-SECTION – D5

REV.NO. 00 DATE 20/12/2019

SHEET 14 OF 15

ANNEXURE-A

iii) 2 point handles - 1 No. per leaf

b) Top Hung Ventilators (Projecting Out)

i) Hinges - As per standard Practice of the
Manufacturer, but minimum two
hinges Per leaf.

ii) Adjustable sliding fabrication
assembles - 2 Nos. per leaf.

iii) 2 point handles - 1 No. per leaf.

c) Bottom Hung Ventilators (Projecting in)

i) Hinges - As per standard Practice of the
Manufacturer, but minimum two
hinges Per leaf.

ii) Concealed side arms for
opening adjustment. - 2 Nos. per leaf.

iii) Spring Catch - 1 No. per leaf.



TITLE:
**TECHNICAL SPECIFICATION
FOR METAL DOORS, WINDOWS,
VENTILATORS, LOUVERS ETC.**

SPECIFICATION NO. PE-TS-457-600-C005		
VOLUME - II B		
SECTION - D	SUB-SECTION – D5	
REV.NO. 00	DATE 20/12/2019	
SHEET 15	OF 15	

ANNEXURE-A

D. ALUMINIUM WINDOW, VENTILATORS, ETC.
(As per IS-1948 latest editions)

a) Side Hung Windows

i) Hinges	- As per standard Practice of the Manufacturer, but minimum two hinges Per leaf.
ii) 300 mm peg stays	- 1 No per leaf
iii) 2 point handles	- 1 No per leaf

b) Top Hung Ventilators (Projecting out)

i) Hinges	- As per standard Practice of the Manufacturer, but minimum two hinges Per leaf.
ii) Adjustable sliding fabrication assemblies	- 2 Nos. per leaf
iii) 2 Point handles	- 1 No. per leaf

c) Bottom Hung Ventilation & (Projecting In)

i) Hinges	- As per standard Practice of the Manufacturer, but minimum two hinges Per leaf.
ii) Concealed side arms for opening adjustment	- 2 Nos. per leaf
iii) Spring Catch	- 1 No. per leaf



TITLE:

**TECHNICAL SPECIFICATION
FOR GLASS AND GLAZING**

SPECIFICATION NO. PE-TS-457-600-C006

VOLUME - II B

SECTION - D SUB-SECTION – D6

REV.NO. 00 DATE 20/12/2019

SHEET 1 OF 5

VOLUME: II B

SECTION - D

SUB-SECTION – D6

GLASS AND GLAZING

SPECIFICATION NO. PE-TS-457-600-C006



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION
FOR GLASS AND GLAZING**

SPECIFICATION NO. PE-TS-457-600-C006

VOLUME - II B

SECTION - D

SUB-SECTION – D6

REV.NO.

00

DATE

20/12/2019

SHEET

2

OF

5

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA	4
4.00.00	I.S. CODES	4
5.00.00	RATES	5



TITLE:

**TECHNICAL SPECIFICATION
FOR GLASS AND GLAZING**

SPECIFICATION NO. PE-TS-457-600-C006

VOLUME - II B

SECTION - D SUB-SECTION – D6

REV.NO. 00 DATE 20/12/2019

SHEET 3 OF 5

GLASS AND GLAZING

1.00.00 SCOPE

This section covers supplying and fixing of all glass and glazing including all clips, putty, mastic cement etc. wherever required as per specifications.

2.00.00 INSTALLATION

2.01.00 General

The Contractor shall supply and install all glass and glazing as required for various doors, windows, sashes, ventilators and fixed louvers, miscellaneous glazing and partitions, from approved manufacturer like Hindustan Pilkinton or equivalent, having uniform refractive index and free from flaws, specks, and bubbles. The glass shall be brought to site in the original packing from the manufacturer and cut to size at site.

Materials

- a) Glare reducing or heat absorbing glass shall be "Calorex" of Hindustan Pilkinton or approved equivalent and special care shall be taken to grind smooth and round off the edges before fixing.
- b) Clear glass shall be flat draw sheet glass and shall be at least 4 mm thick. Sheet glass for doors shall be minimum 5.5 mm thick.
- c) Wired glass shall be thick- rolled glass with centrally embedded 42g wire mesh of Georgian type. This may be of clear or coloured glass, as required.
- d) Obscure glasses shall have a cast surface in one side.
- e) Coloured and figured glass shall be as per approved sample.
- f) In general, the putty shall conform to IS: 400 and be of best quality from approved manufacturer. It shall be brought to site in the manufacturer's original packing.
- g) Neoprene gaskets with snap-fit glazing beads shall be fixed as per manufacturer's instructions and shall sit snugly against glass to give a leak proof installation.

2.03.00 Glazing, Setting, and Finish

All glazing clips, bolts, nuts, putty, mastic cement etc. as required shall be supplied by the Contractor.



TITLE:

**TECHNICAL SPECIFICATION
FOR GLASS AND GLAZING**

SPECIFICATION NO. PE-TS-457-600-C006

VOLUME - II B

SECTION - D SUB-SECTION – D6

REV.NO. 00 DATE 20/12/2019

SHEET 4 OF 5

All glass shall be thoroughly cleaned before putting in position. Each glass pane shall be held in place by special glazing clips of approved type. As specified in relevant I.S. Codes, four glazing chips shall be provided per glass pane, except for large panes where six or more clips shall be used as per engineer's instructions. All holes that may be necessary for holding the clips glazing heads and all other attachments shall be drilled by, the Contractor.

Glass panes shall be set without springing, and shall be bedded in putty and back puttied, except where mouldings or gasket are specified, putty, mastic cement etc. shall be smoothly finished to the even line and figured glass shall be set with smooth side out.

Where owner will supply glass, the Contractor shall cut it to size and fix them in the same as specified above.

The Contractor shall supply necessary glazing clips, putty, mastic cement etc.

After completion of glazing, the Contractor shall remove all dirt stains, excess putty etc. clean glass panes and leave the work in perfectly acceptable condition. All broken cracked or damaged glass shall be replaced by new ones at the contractor's own cost.

3.00.00

ACCEPTANCE CRITERIA

- a) All installation shall be free from cracked, broken, or damaged glass. Edges of large panes of thicker glass and heat absorbing glass shall be inspected carefully for chipped, cracked, or underground edges.
- b) Glazing shall be carefully done to avoid direct contact with metal frames.
- c) All glass shall be embedded in mastic or fixed by neoprene gaskets to give a leak proof installation.
- d) At completion, the panes shall be free from dirt, stains, excess putty etc. to the complete satisfaction of the Engineer.

4.00.00

I.S. CODES

Following are some of the important I.S.Codes relevant to this Section:

IS: 3548 - Code of practice for glazing in building.

IS: 1081 - Code of practice' for fixing and glazing metal doors, windows ventilators.



TITLE:

**TECHNICAL SPECIFICATION
FOR GLASS AND GLAZING**

SPECIFICATION NO. PE-TS-457-600-C006

VOLUME - II B

SECTION - D

SUB-SECTION – D6

REV.NO.

00

DATE

20/12/2019

SHEET

5

OF

5

5.00.00

RATES

Rates of glass and glazing if not included in respective items for supply and installation of window, ventilator, and partitions shall be paid separately as per BOQ items provided. No separate payment shall be made for glazing clips, mastic cement, putty, screws; rails, etc. nor for drilling holes in frames for inserting glazing clips.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROLLING STEEL SHUTTERS AND
GRILLS**

SPECIFICATION NO. PE-TS-457-600-C007

VOLUME - II B

SECTION - D SUB-SECTION - D7

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 5

VOLUME: II B

SECTION - D

SUB-SECTION – D7

ROLLING STEEL SHUTTERS AND GRILLS

SPECIFICATION NO. PE-TS-457-600-C007



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION FOR
ROLLING STEEL SHUTTERS AND
GRILLS**

SPECIFICATION NO. PE-TS-457-600-C007

VOLUME - II B

SECTION - D SUB-SECTION - D7

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 5

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA & GUARANTEE	5
4.00.00	I.S. CODES	5
5.00.00	RATES AND MEASUREMENTS	5



TITLE:

**TECHNICAL SPECIFICATION FOR
ROLLING STEEL SHUTTERS AND
GRILLS**

SPECIFICATION NO. PE-TS-457-600-C007

VOLUME - II B

SECTION - D SUB-SECTION - D7

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 5

ROLLING STEEL SHUTTERS AND GRILLS

1.00.00 SCOPE

This Section covers the design and supply of materials, fabrication, delivery and erection of Rolling Shutters/Grills with motor drive and/or manual operation including all accessories as hereinafter specified.

2.00.00 INSTALLATION

2.01.00 Components

- a) Slats for rolling shutters shall be made from tested bright cold rolled, annealed M.S. strips, not less than 0.9 mm thick for shutters upto 4.5 M wide and not less than 1.25 mm thick for shutters having width more than 4.5 M, wide and above, machine rolled at 75 mm rolling centers, interlocking with each other. The profile will be such as to prevent excessive deflection under specified wind load.
- b) Rolling grills shall be constructed out of 6mm rods at 35 mm on centers running horizontally flexible connected with vertical links spaced not more than 200 centers. Alternatively, rolling grills shall be made from perforated slats of approved design reinforced with 6mm dia rods.
- c) End locks shall be heavy type M.C.I./C.I. and shall be provided at each end of alternate slats unless specified otherwise.
- d) Bottom bars shall be finished with two angles not less than 6 mm thick for external shutters. When shown on drawings, a flexible weather strip shall be applied to make tight contact with the floor.
- e) Guides shall be of such depth as to retain the shutter under a wind pressure of 100 Kg/Sq.m.
- f) Shafts shall be of steel pipe of sufficient size to carry the tensional load with a maximum deflection of 1/360th of span. Grease packed ball bearings or bushings shall be provided for smooth trouble free operation.
- g) Hoods shall be formed of not less than 20 gauge steel, suitable reinforced to prevent sag.
- h) Locks shall be slide bolt and hasp, or cylinder lock operable from one or both sides. Provision securing hand chain with pad-lock, provision for removable handle for hand cranks etc. shall be made as prescribed by the Engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROLLING STEEL SHUTTERS AND
GRILLS**

SPECIFICATION NO. PE-TS-457-600-C007

VOLUME - II B

SECTION - D SUB-SECTION - D7

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 5

- i) Power unit shall be suitable for 3 phase, 50 cycles, 400-volt A.C. power supply and be either floor or wall mounted unit. The motor shall be of sufficient capacity, to move the shutter in either direction at a speed of 0.3 metres per second. In addition to the gear motor each standard power unit shall include a magnetic brake, a reversing starter with built-in overload protection, a geared limit switch and one push button station located inside the building unless otherwise stated in drawing.

It is desirable that the bottom bar of motor operated doors shall be provided with a sensitive edge, electrically connected to stop the travel of the door on meeting an obstruction.

- j) Operating chains shall be of tested quality, heavily galvanized and with all ends rounded to assure smooth operation and hand protection.
- k) Reduction gears shall be high strength grey cast iron, machine moulded from machine out patterns.

2.02.00 Manually Operated Shutters/Grills

Manually operated shutters shall be easily operable by one person. The speed of operation shall be about 1.3 metres per second. In general, manually operated shutters shall be push pull type for opening up to 9 Sq. metre in area. Larger shutters shall, be either chain and gear operated or crank and gear operated. The crank handle shall be removable. All shutters shall be lockable from one or both sides as desired by the Engineer.

2.03.00 Power operated Shutters/Grills

These shall be operable from a push button station conveniently located beside the door. One emergency hand chain/crank operation shall also be provided for use in case of failure of the electric system. Where called for, externally mounted shutters shall be operated by control mechanism located inside the building.

2.04.00 Shop Coat

Shutters shall be painted with one coat of red lead or zinc chromate primer. Where specified, doors shall be galvanized and subsequently painted one coat of zinc chromate for adhesion of field coat.

2.05.00 Erection

Door shall be installed by the manufacturer or his authorized representative and all work shall be as per manufacturer's instructions. Any drilling or cutting to concrete, masonry etc. shall be made good after erection of shutters and all abrasion to shop coat shall be touched up. All electrical work shall be



TITLE:

**TECHNICAL SPECIFICATION FOR
ROLLING STEEL SHUTTERS AND
GRILLS**

SPECIFICATION NO. PE-TS-457-600-C007

VOLUME - II B

SECTION - D SUB-SECTION - D7

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 5

in strict accordance with the latest Indian Electricity Rules.

3.00.00 ACCEPTANCE CRITERIA AND GUARANTEE

3.01.00 Shop Inspection

After completing the manufacture of the different components of the rolling shutter, an arrangement for shop inspection by the Engineer shall be made to check the conformity with approved shop drawings.

3.02.00 Field Inspection

After installing the shutters, the Contractor shall test the performance of the shutter in the presence of the Engineer. The doors shall be smoothly operable under all ambient conditions. All control and locking devices shall give fault free performance.

3.03.00 Guarantee

The Contractor shall give one year's guarantee for the successful operation of the shutters. This shall be supported by a separate and unilateral guarantee from the manufacturer of the shutters.

4.00.00 I.S. CODE

IS: 6248 - Metal rolling shutters and rolling grills.

5.00.00 RATES AND MEASUREMENT

5.01.00 Rates

Rates for rolling shutters and grill shall include the cost of the locks, guide channels, cost of drive as specified. In case of electrically operated rolling shutters, the rate shall also include the mounting of controls, wire and wiring from the nearest junction box, conduit and other electrical connections and cost of electric motor.

5.02.00 Measurement

Supply and installation of rolling shutter and grill shall be measured in Sqm in net outer to outer (including frame) area of each type used as described in "Schedule of Items".



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 1 OF 9

VOLUME: II B

SECTION - D

SUB-SECTION – D8

MISCELLANEOUS METAL

SPECIFICATION NO. PE-TS-457-600-C008



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 2 OF 9

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA	7
4.00.00	IS CODES	8
5.00.00	RATES AND MEASUREMENTS	8



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 3 OF 9

MISCELLANEOUS METAL

1.00.00 SCOPE

This section covers supply, fabrication and erection of miscellaneous metal items of light nature in gates, balcony and stair hand rails, structural works, ladders, hangers, masonry anchors, anchor bolts, fasteners, chain link fencing, barbed wire fencing etc. as specified or shown on drawing or as instructed by the Engineer. The above items shall be of fabricated or cast of mild steel, aluminium, brass, cast iron, M.S.& galvanized M.S. sheets, aluminium sheets, expanded metal, wire mesh as shown on drawings or specified.

2.00.00 INSTALLATION

2.01.00 Fabrication/casting

2.01.01 General

All work shall be done according to approved shop drawings. All workmanship shall be equal to the best practice in modern structural or foundry shop.

2.01.02 Shop Connections

- a) All shop connections shall be riveted or welded except when noted otherwise on drawings.
- b) Welding of steel shall be done in accordance with IS: 816.
- c) Welding of aluminium shall be done accordance with IS: 2812, “Arc welding of Aluminium and Alloys.” Special care shall be taken to grind smooth all welded surface that shall remain exposed to view. Welds shall be electrically continuous if so required by the Engineer.

2.01.03 Shop Coat

Before leaving the shop, all metal work shall be thoroughly cleaned by effective means of all loose mill seals, rust and foreign matter. Except where encased in concrete, all steelwork shall be given one coat of approved metal protective paint, applied by brush thoroughly and evenly, well worked into joints and other open spaces. All paint shall be applied to dry surfaces. When specified steel work shall be galvanised or painted with a coat of zinc chromate primer. Aluminium surfaces, which shall come in contact with masonry, shall be given one coat of bituminous paint.



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 4 OF 9

2.02.00 Erection

2.02.01 Bracing

The Contractor shall provide all necessary temporary guys and braces to ensure alignment and stability of the members and to take care of all loads to which the structure may be subjected, including erection of equipment and operation of the same.

2.02.02 Temporary Bolting-Up

As erection proceeds the Contractor shall plum up and level all members and shall securely bolt up to take care of all dead load, wind load and erection stresses. Wherever erection equipment or other loads are carried by members during erection, proper provision shall be made to take care of the stresses resulting from the same.

2.02.03 Turned Bolt

For field connections where bolting is specified, holes for the turned bolts may be reamed in the field, if required. All drilling or reaming for turned bolts shall be done after the parts to be connected are assembled.

2.02.04 Welding

Where specified on drawings, welding shall be done in accordance with IS: 816 for steel and IS: 2812 for Aluminium & Alloys.

2.02.05 Cutting and Fitting

No cutting of sections, flanges, webs of angles shall be done without the approval of the Engineer. Where indicated on the drawings holes, cuttings, etc. shall be provided as required for installation, to the work by the other Contractors. No additional holes or cuttings, than those shown on drawings, shall be made without the approval of the Engineer.

2.02.06 Drifting

Correction minor misfits and a reasonable amount of reading and cutting of excess stock from rivets may be permitted. For this, light drifting may be allowed to draw holes together. Twist drills shall be used to enlarge as necessary to make connections, reaming that weakness the members or make it impossible to fill the holes properly or to adjust accurately after reaming shall not be allowed.

Any error in shop work which prevents the proper assembling and fitting of parts by moderate use of drift pins or a moderate amount of reaming and slight



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 5 OF 9

chipping and cutting shall immediately be called to the attention of the Engineer-and approval of the method of correction obtained. The use of cutting torches to enlarge or alter rivet holes shall not be permitted.

2.02.07 Spot Painting

All field rivets and bolts and also any serious abrasion to shop paint shall be spot painted with the same materials and used for the shop paint or equivalent.

2.02.08 Good

All cutting to concrete or masonry shall be made good to the satisfaction of the Engineer.

2.02.09 Grouting

All bearing plates, loose, lintels and beams, etc. shall be set to proper grade and level by the Contractor and the Engineer's approval obtained before proceeding with the grouting. Grouting shall be done in 1:1½:3 concrete with 6 mm down stone chips or as specified in schedule of items.

2.02.10 Anchor Fasteners

The anchor fasteners shall be of two type viz. light duty for carrying tensile load upto 0.5MT per fasteners and heavy duty for carrying tensile load of 0.5MT to 5.0MT per fasteners. These anchor fasteners shall be fixed into concrete. The Contractor shall submit the Manufacture's literature showing the average pull out and average shear value for anchor of various sizes. Anchors shall be fixed in position strictly as per the manufacturer's instructions and as approved by the Engineer.

Heavy Duty Anchor Fasteners

The safe tensile load carrying capacity of the anchors shall be arrived by providing the minimum factor of capacity of 2.5 for the characteristic load of the anchor. Minimum size of anchor shall be M8 (8mm). All anchors shall be from the approved manufacturers like HILTI or equivalent.

- Anchor fasteners shall be supplied and fixed in position by the contractor. Anchor fasteners can be of mechanical bonding or chemical bonding.
- Capacity of the anchor shall be established after considering the effect of concrete grade, embedment depth, concrete thickness, anchor spacing and edge distance from the concrete edge.
- The selection for the particular type of bonding for the anchors shall be made after considering the concrete grade, available embedment depth, load to be transferred, space available for installing anchors.
- The mechanical bonding anchor are torque controlled anchors made from carbon steel of grade 8.8 as per IS:1367 part 3. Anchors in bolt as well as



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 6 OF 9

nut version are acceptable. The bolt version anchors consists of bolt washer, sleeves, plastic section, expansion sleeves and a cone. Nuts version anchor consists of nuts, threaded rod, washer, sleeves, plastic section, expansion sleeves and a cone. All steel component of anchor shall be electro galvanised to minimum 5 micron coating thickness. The plastic section shall be of polyacetal Derlin 100 or equivalent.

- e) Chemical bonding anchor shall consist of foil capsule and threaded rod. The foil capsule shall contain the resin and hardener. The threaded rod shall have chiselled tip. The behaviour of anchors under fire shall conform the heating curves as per ISO:834. Anchors of size M8 to M24 shall conform to grade 5.8 and anchors of size M27 to M39 shall conform to grade 8.8 as per IS:1367 part 3. All steel components of the anchors shall be electro-galvanised to minimum 5 micron thickness.

Light Duty Anchors

This anchor shall comprise of stud, nut, washers, expansion sleeve. The one end of the stud shall have thread and the other end shall have cold formed conical head. All steel components of the anchors shall be electro-galvanised to minimum 5 micron thickness. The expansion sleeve shall preferably be of stainless steel of SS316. The anchors shall conform to minimum grade 5.8 as per IS:1367 part 3.

2.02.11 Pipe Joints

MS pipes or GI pipes shall be joined by threaded sockets or by welding. Cast iron pipes shall be socket and spigot joined and caulked with hemp and molten head.

2.03.0 FENCING

2.03.01 Chain Link Fencing

The material requirement shall conform to IS: 2721 latest edition. The chain link fencing shall be woven from 3.15mm dia. wire with mesh size of 50mm. The mesh wire shall not vary from specified dia. by more then ± 0.05 mm. all steel wire shall be hot dipped galvanised wire. The dia shall be measured over the galvanised coating. The line wire shall be 4.0mm dia. mild steel. The stirrup wire for securing the line wire to the intermediate post (RCC/structural steel) shall be 2.5 mm diameter mild steel. The tying wire for securing the chain link fencing to the line wire shall be 1.6mm diameter mild steel. Hair pin chain staples for fastening down the bottom of galvanised chain line fencing to the concrete sill shall be 3.15mm wire. The ends shall be bent outwards for securing anchorage.

Cleat for eye bolts shall be of uniform size and shall consist of mild steel angle of 75 x 50 x 8 mm. The eye bolts strainer shall consist of bolt with welded eye



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 7 OF 9

sufficiently threaded and fitted with a nut and washer. Two-way eye bolt strainer shall have suitable ring nuts fitted after the wires have been strained on one side. Stretcher bar shall consist of mild steel flats 25 x 4.75 mm. They shall be secured to the cleats by steel bolts.

The chain link fencing shall be strained between each pair of straining posts and secured to each straining posts by means of a stretcher bar. One of top line wire shall be threaded through appropriate adjacent row of mesh, care being taken that no meshes in the row are bypassed by the line wire except where deviation is necessary at the straining posts. The second top line wire shall be strained in front of the fencing. The fencing shall be attached to the top and bottom line wire by wire ties spaced at 150mm apart and to the other middle line wire by wire ties spaced at 450mm apart.

The bottom of fencing shall be treated as follows:

Continuous concrete sill 125mm wide x 225mm high for full length between posts shall be cast with the top 25mm above GL and 25mm below the chain link fencing. Hair pin staples shall be threaded through the bottom row of mesh at 750mm c/c and set in the sill to a depth of 150mm.

2.03.02

Barbed Wire Fencing

The barbed wire shall be conform to IS:278 latest edition. The barbed wire shall be galvanised and galvanising shall conform to the requirement laid down for 'light-coated wire' of IS:4826 and it shall be smooth and relatively free of lumps etc. Wire with excessive roughness blisters, salammoniac spots shall be rejected. The barbed wire shall be made from two line wire and two point wire of 2.5 mm thickness each. The barbs shall have four point and shall be formed by twisting two point wires, each two turns, tightly around both or one line wire (Type A - around both line wire, Type B - around one line wire) making altogether four complete turns. The barbs shall be so finished that four points are set and located or locked as far as possible at right angle to each other. The barbs shall have a length of not less than 13mm and not more than 18mm. The distance between two barbs shall be 75 ± 12 mm.

Straining posts shall be provided at all ends and corners of fences or at changes in direction or acute variation in level and at intervals not exceeding 66 M on straight lengths of fence. Intermediate posts shall be spaced at regular intervals not exceeding 3.0m. Struts shall be fitted to all straining posts behind the chain link fabric in the direction of line of fence. There shall be four evenly spaced row of line wire in all. The top line wire shall be doubled, making five line wire in all. The bottom wire shall be closed to the ground. Each line wire shall be strained tightly by means of eyebolts strainers or winders at each straining points. Each line wire shall be secured to each intermediate post by a wire stirrup passed through a hold in the post and secured to the line wire by three complete turns on each sides of the post. The barbed wire shall be fitted with one dropper at the centre of each bay, secured



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 8 OF 9

to the wire so that they could not be bunched together. Droppers for barbed wire shall be of mild steel of not less than 25 x 4.75 mm thick with 38 x 4.85 mm half round staples for fastening the barbed wire to them. Bracing for the rows of barbed wire shall be approved by the Engineer.

3.00.00 ACCEPTANCE CRITERIA

- a) All items shall be correct shape, size, weight etc. shown on drawings and schedule of items.
- b) For installed items, the tolerances shall be as follows
 - i) Permissible deviation from, straightness – 1 in 1000.
 - ii) Seats, stiffener connections etc. shall be as per approved drawings and shall not interfere with architectural clearances.
- c) All castings shall be free from blowholes, cracks, and other blemishes.
- d) All MS wire fencing shall be in true vertical plain, and shall not bulge.

4.00.00 IS CODES

- IS:278 Specification for Galvanised Steel Barbed wire for fencing.
- IS:816 Code of practice for use of Metal Arc welding for general construction in mild steel.
- IS:1367 Industrial Fasteners – Threaded steel fasteners - Technical supply condition.
- IS:2721 Specification for Galvanised Steel Chain Link fence fabric.
- IS:2812 Arc welding of Aluminum and Alloy

5.00.00 RATES AND MEASUREMENTS

5.01.0 Rates

Rates shall include supply, fabrication and installation for misc. metals works as required for completion of works like gates, fencing, handrails, ladders, hangers, anchors etc., unless otherwise specified in Schedule of Items. Rate for fencing shall also include excavation, concreting and supply, erection & fabrication of post (post made of either structural steel or reinforced cement concrete), unless any specific item is excluded.



TITLE:
TECHNICAL SPECIFICATION FOR
MISCELLANEOUS METAL SIDING

SPECIFICATION NO. PE-TS-457-600-C008

VOLUME - II B

SECTION - D SUB-SECTION – D8

REV.NO. 00 DATE 20/12/2019

SHEET 9 OF 9

5.02.0

Measurements

Measurement for MS gates shall be in MT.

Measurement for galvanised MS wire fencing shall be in Sqm.

Measurement for Anchors shall be in nos. for the type as specified in schedule of items.

Measurement of other misc. metals shall be done in MT unless otherwise specified in schedule of items.



**TECHNICAL SPECIFICATION FOR
MASONRY AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 1 OF 12

VOLUME: II B

SECTION - D

SUB-SECTION – D9

MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 2 OF 12

C O N T E N T

CLAUSE NO.	DESCRIPTION	PAGE NO.
1.00.00	SCOPE	3
2.00.00	MATERIALS	3
3.00.00	INSTALLATION	6
4.00.00	I.S. CODES	10
5.00.00	RATES AND MEASUREMENTS	11



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 3 OF 12

MASONRY AND ALLIED WORKS

1.00.00 SCOPE

This section covers furnishing, installation including handling, transporting, batching, mixing, laying scaffolding, centering, shuttering, finishing, curing, protection, maintenance and repair of common building materials till handing over of masonry and allied works for use in structures and locations covered under the scope of this package.

2.00.00 MATERIALS

a) Brick

Bricks for general masonry work shall be of class designation 7.5 of nominal dimensions as per standard specification under IS: 1077, well burnt, of uniform size, shape and colour, free from cracks, flaws or modules of free lime and emit clear ringing sound when struck. Fractured surface shall show uniform texture free from grits, lumps holes etc. Water absorption after 24 hours immersion shall not exceed 20% by weight for bricks. Dimensional tolerance shall not exceed 8% of the size shown in drawings for bricks. All bricks shall have rectangular faces and sharp straight edges. The bricks shall show no efflorescence after soaking in water and drying in shade.

Each brick shall have the manufacturer's identification marks clearly marked on the frog. Representative samples shall be submitted and approved samples shall be retained by the Engineer for further comparisons and reference. Any brick not found up to the specification shall be removed immediately from site at the Contractor's own cost.

Bricks shall not be dumped at site. They shall be stacked in regular tiers, even as they are unloaded; to minimize breakage and defacement of bricks. Bricks selected for different situation of use in the work shall be stacked separately.

b) Stone

All stones shall be obtained from approved quarries, hard, tough, durable compact grained, uniform in texture and colour and free from decay, flaws, veins, cracks and sand holes. The surface of a freshly broken stone shall be bright, clean, and sharp and shall show uniformity of texture, without



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 4 OF 12

loose grains and free from any dull, chalky, or earthy appearance. Stone showing mottled colours shall not be used for face work. A stone shall not absorb more than 5 per cent of its weight of water after 24 hours immersion. The type of stone shall be as specified on drawings and/or instructed by the Engineer. Samples shall be submitted by the Contractor and approved samples shall be retained by the Engineer for comparison of bulk supply.

c) Cement

Cement used shall be Ordinarily Portland Cement or Portland Slag Cement or Portland Pozzolana Cement conforming to IS Codes and shall be fresh when delivered. In special cases, Rapid Hardening Portland Cement, Low Heat Cement etc. may be permitted or directed to be used by the Engineer. The Contractor shall submit the manufacturer's certificate for each consignment of cement procured to the Engineer. If at any time, the Engineer feels that the cement being used by the Contractor is not up to specification, he may stop the work and send the samples of the cement to a testing laboratory for standard tests and all expenses incurred thus shall be borne by the Contractor. The Contractor shall also have no claim for this type of suspension of work.

The cement shall be stored above the ground level in perfectly dry and watertight sheds. The bags shall be stacked in a manner so as to facilitate removal or first in first out basis. Any material considered defective by the Engineer shall not be used by the Contractor and shall be removed from the site immediately.

d) Coarse Aggregate

Coarse aggregates shall be as per IS: 383 latest editions, consisting of hard, strong and durable pieces of crushed stone and shall be free from organic or clay coatings and other impurities like disintegrated stones, soft flaky particles etc. and any other material liable to affect the strength, durability or appearance of concrete.

Aggregates other than crushed stone conforming to the provisions of specification may be used if permitted by the Engineer.

Washing of aggregates by approved means shall be carried out, if desired by the Engineer.

Grading of coarse aggregates shall generally conform to IS: 383 and shall be such as to produce a dense concrete or the specified proportions and strength and of consistence that will work readily into position without



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 5 OF 12

segregation.

Aggregates shall be stored on brick soling or an equivalent platform so that they do not come in contact with dirt, clay, grass, or any other injurious substances at any stage.

Aggregate of different size shall be kept in separate stacks. If so desired by the Engineer aggregate from different sources shall be stacked separately with proper care to prevent intermixing.

e) Sand

Sand shall be hard, durable, clean, and free from adherent coatings or organic matter and shall not contain clay balls or pellets. The sand shall be free from impurities such as iron pyrites, alkalis, salts, coal, mica, shale or other laminated materials in such forms or quantities as to affect adversely the hardening, strength, durability or appearance of mortar, plaster or concrete or to cause corrosion to any metal in contact with such mortar, plaster or concrete. All sand shall be properly graded and shall be as per relevant IS Code. Sand for concrete shall conform to IS: 383.

f) Water

Water shall be clean, fresh and free from organic matters, acids or soluble salts and other deleterious substances which may cause corrosion, discoloration, efflorescence etc.

g) Reinforcement

Reinforcement steel shall be clean and free from loose mill scales, dust, loose rust, oil and grease or other coatings, which may impair proper bond. Structural steel shall conform to IS: 2062. Mild steel and medium tensile steel bars and hard-drawn steel wire for concrete reinforcement shall conform to IS: 432. Cold twisted steel bars shall conform to IS: 1786. Hand drawn steel wire fabric shall conform to IS: 1566. Hexagonal wire netting shall conform to IS: 3150. All steel bars including and above 10 mm diameter shall be of tested quality. All wire netting shall be galvanized.

Reinforcement bars shall be stored off the ground and under cover if so desired by the Engineer. If necessary, a coat of cement wash shall be given to the bars to guard against rusting.

3.00.00 INSTALLATION

3:01.00 Soling

3.01.01 Brick Soling



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 6 OF 12

The ground shall be dressed, consolidated by ramming, or by light rolling and a 12 mm thick cushion of sand laid. On the sand cushion the bricks shall be laid with fine joints and placed firmly in position by hammering with wooden mallet. The surface shall be free from undulations. The 'frog' side shall be on the underside. The joints shall be broken the in all direction and bricks cut as required. The pattern of laying and number of layers shall be as per Schedule of item. Orientation shall be as desired by the Engineer. After laying of each layer of bricks sand shall be spread over and worked into the joints to pack the bricks tight.

3.01.02 Stone Soling

The stones for soling shall be selected on the basis of thickness of soling specified in the Schedule of Items. The larger stones shall be laid and the gaps filled by smaller stones. The interstices shall then be firmly packed with sand by flooding with water.

3.02.00 Brick-on-Edge

Excavation shall be done close to the brick dimensions and in perfect alignment. Bricks shall be firmly placed by hammering with wooden mallets and sides and joints packed firmly with earth so that the edging is not disturbed easily. Alignment and level shall be acceptable to the Engineer.

3.03.00 Masonry

3.03.01 General

All masonry work shall be true to lines and levels as shown on drawings. All masonry shall be tightly built against structural members and bonded with dowels, inserts etc. as shown on drawings.

3.03.02 Cement Mortar

Cement mortar shall be prepared with materials specified in clause 2.00.00. Sand for masonry mortar shall conform to IS: 2116. Cement and sand in the specified proportion shall be mixed dry thoroughly and minimum water added to attain required workability.

Surplus mortar droppings from masonry, if received on surface free from dirt may be mixed with fresh mortar if permitted by the Engineer who may direct addition of additional cement without any extra payment. No mortar, which has stood for more than half an hour, shall be used.



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 7 OF 12

3.03.03 Brick Masonry

Bricks shall be soaked by submergence in clean water for at least two hours in approved vats before use. Bricks shall be laid in English bond unless specified otherwise. Broken bricks shall not be used. Cut bricks shall be used if necessary to complete bond or as closers. Bricks shall be laid with frogs upwards over full mortar beds. Bricks shall be pressed into mortar and tapped into final position so as to embed fully in mortar. Inside faces shall be buttered with mortar before the next bricks is placed and pressed against it. Thus all joints between bricks shall be fully filled with mortar.

Mortar joints shall be kept uniformly 10 mm thick. All joints on face shall be raked to minimum 10 mm depth using raking tool while the mortar is still green to provide bond for plaster or pointing.

Where plaster or pointing is not provided, the joints shall be struck flush and finished immediately. Brickworks two bricks thick or more shall have both faces in true plane. Brickwork of lesser thickness shall have one selected face in true plane.

3.03.04 Exposed Brickwork

Brickwork in superstructures, which is not covered by plaster, shall be as shown on drawing and executed by specially skilled mason. Courses shall be truly horizontal and vertical joints truly vertical. Wooden straight edges with brick course graduations and position of window sills and lintels shall be used to control uniformity of brick courses. Masons must check workmanship frequently with plumb, spirit level, rule, and string. All brickwork shall be cleaned at the end of days work. If face bricks are specified, the brickwork shall be in composite bricks, with face bricks on the exposed face and balance in routine bricks, but maintaining the bond fully. Where face bricks are not specified, bricks for the exposed face shall be specially selected from routine bricks. All exposed brickwork on completion of work shall be rubbed down, washed clean, and pointed as specified. Where face bricks are used carborandum stone shall be used for rubbing down.

3.03.05 Reinforced Brickworks

Reinforcements shall be as specified. All reinforcements shall be thoroughly cleaned and fully embedded in mortar. Where M.S. bars are used as reinforcement, these shall be lapped with dowels if left in R.C. columns or welded to steel stanchions.

3.03.06 Stone Masonry



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 8 OF 12

Stones shall be thoroughly soaked before laying. Stones shall be laid on their natural quarry beds. Individual stones shall be fitted with mallet and properly wedged to reduce thickness of mortar joints. Thickness of joint shall be not less than 8 mm and not greater than 25 mm. At least two stones shall run the full width of the wall for every square meter of surface area.

3.03.07 Exposed Stone work

Stonework, which is to be kept exposed, shall be as shown on approved drawing. It shall be executed by specially skilled mason. Stones used for exposed face shall be specially selected. All exposed stone faces shall be kept clean and free from mortar and pointed up neatly as the work proceeds in a manner called for in the drawings or instructions. A sample wall, 10 Sq.M. area shall be built and approved by the Engineer and all works shall match with this sample.

3.03.08 Composite Masonry

Where stonework facing with brick masonry backing is specified the bond between them shall be achieved by bond stones of dimensions and frequency as desired by the Engineer.

3.03.09 Expansion & Separation Joints

Location of joints shall strictly be as shown on drawings or as instructed by the Engineer. Expansion joints shall be as shown on drawings and specified. Expansion joint filler boards and sealing strips shall have minimum transverse joints. Transverse joints shall meet the approval of the Engineer.

Separation joints shall be with standard waterproof paper or with alkathene sheets about 1 mm in thickness. Length and sealing of laps shall be to the satisfaction of the Engineer.

3.03.10 Mouldings, Cornices, Drip Course

These shall be made as shown in drawings. Bricks or stone shall be cut and dressed as required. If no subsequent finish is envisaged, these shall be rubbed to correct profile with Carborundum stone.



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 9 OF 12

3.03.11 Curing

Masonry shall be cured by keeping it wet for seven days from the date of laying. In dry weather at the end of days work top surface of masonry shall be kept wet by ponding.

3.03.12 Embedding of fixtures

All fixtures shall generally be embedded in mortar and masonry units shall be cut as required.

3.03.13 Encasing of Structural Steel

This shall be done by building masonry work round flanges, webs etc., and filling the gap between steel and masonry by minimum 12 mm thick mortar. Encased members shall be wrapped with chicken wire mesh when shown on drawings or instructed by the Engineer. The minimum lap in chicken wire mesh shall be 50 mm.

3.04.00 Damp Proof Course (DPC)

Unless otherwise specified Damp-proof course shall be 40 mm thick 'artificial stone' in proportion 1:1½:3 cement sand stone-chips (10 mm down) with admixture of a waterproofing compound as approved by the Engineer. The percentage of admixture shall be as per manufacturer's specifications but not less than 2% by weight of cement. The top surface shall be double chequered and cured by ponding for seven days.

3.05.00 Damp Proof Membrane

Damp proof treatment using fibre or hessian base bitumen felt shall be 6, 8 or 10 course treatment as specified in IS: 1609. The number of courses shall be as shown as drawings or as specified. Sequence of work shall be as directed by the Engineer. Extreme care shall be taken to prevent damage to felt during and after laying. The Contractor shall be obliged, at his own expense, to rectify any leakage appearing within 5 years of installation by removing and renewing the coats at the point of leakage.

Where shown on drawing, damp proof membrane with one layer bitumen paper or one layer alkathene sheet shall be laid with minimum 150 mm lap under slabs on grade.

3.05.00 Plinth Protection

Plinth of buildings shall be protected with brick-on-edge paving of minimum 750mm width unless otherwise shown on the drawings. The treatment shall



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 10 OF 12

consist of laying bricks in cement mortar 1:6 (1 cement: 6 sand) over a 75mm thick bed of dry graded brick aggregate, 40mm nominal size, grouted with sand. The top shall be finished with 1:2 cement mortar pointing (1 cement: 2 sand). Plinth protection shall be laid with a minimum outward slope of 1 in 50. The brick aggregate shall be well graded, broken from well burnt or slightly overburnt and dense brickbats. It shall be homogeneous in texture, roughly cubical in shape, clean and free from dirt or any other foreign matter.

The ground shall first be prepared to the required slope around the building. The high portions of the ground should be cut down; hollows and depressions filled up to the required level from the excavated earth and rammed so as to give uniform outward slope. The bed shall be watered and rammed with heavy iron square rammers. Surplus earth, if any, shall be disposed off beyond a lead of 50m or as directed by the Engineer.

Over this, 75mm thick bed of aggregate of 40mm nominal size, shall be laid with a minimum outward slope of 1 in 50. Aggregates shall be carefully laid and packed, bigger sized being placed at the bottom. The brick aggregates shall be consolidated dry with heavy iron rammers.

The aggregates shall then be grouted evenly with sand at the rate of 0.6 cubic metre per square metre area, adequately watered to ensure filling of voids by sand and again rammed with heavy iron rammers. The finished surface shall give uniform appearance. After the subgrade has been compacted thoroughly, brick flooring with bricks of specified strength in cement mortar 1:6 (1 cement: 6 sand) shall be laid.

The bricks shall be laid on edge in Diagonal/Herring Bone Bond or other pattern as specified or as directed by the Engineer. Bricks shall be laid on 12mm thick mortar bed and each brick shall be properly bedded and set home by gentle tapping with handle of trowel or wooden mallet. Its inside face shall be buttered with mortar before the next brick is laid and pressed against it. On completion of the portion of flooring, the vertical joints shall be fully filled from the top with mortar. The surface shall present a true plain surface with the required slope.

The pointing shall be done in cement mortar 1:2 (1 cement: 2 sand). The mortar shall be pressed into the joints and shall be finished off flush and level with the edges of the bricks so as give a smooth appearance. The edges shall be neatly trimmed with a trowel and a straight edge. The mortar shall not spread over surface of the masonry.

Brick flooring & pointing shall be kept wet for a minimum period of seven days. These shall be protected from rain by suitable covering when the mortar is green.



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 11 OF 12

4.00.00

I.S. CODES

Some of the important relevant codes for this section are:

IS: 1127: Recommendations for dimensions and workmanship of natural building stones for masonry work.

IS: 1597: Code of Practice for Construction of stone Masonry.

IS: 1609: Code of Practice for laying Damp proof treatment using bitumen felts.

IS: 2212: Code of Practice for Brickwork.

IS: 2250: Code of Practice for preparation and use of masonry Mortar.

IS: 5134: Bitumen Impregnated Paper & Board.

5.00.00

RATES AND MEASUREMENTS

5.01.00

Rates

Unit rate for masonry work shall include the following:

- Raking out joints for plastering or pointing or finishing the joint flush as the work proceeds.
- Preparing top sand sides of existing wall for joining old with new work.
- Providing, dismantling and removing the scaffolding.

Unit rate for DPC shall be inclusive of formwork and bitumen painting.

5.02.00

Measurement

Brickwork in wall of half brick thickness shall be measured separately in Sqm stating the wall thickness and more than half brick thickness shall be measured by volume. Plaster thickness shall not be considered for computation of volume.

Masonry work in sub structure and super structure shall be measured separately, unless otherwise specified in the Schedule of items.

No deductions shall be made and no extra payment shall be made for following:

- Opening upto 0.1 Sqm each in area. In calculating the area of the opening lintels or sills shall be included along with the size of the opening.



TECHNICAL SPECIFICATION FOR MASONRY AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C009

VOLUME - II B

SECTION - D SUB SECTION - D9

REV.NO. 0 DATE : 19/12/2019

SHEET 12 OF 12

- b) Drainage holes and recesses for cement blocks to embed holdfasts for doors, windows etc.
- c) Pipe and fixtures upto 300mm dia. and nothing extra shall be paid for the mortar used for fixing.
- d) Ends of dissimilar materials (i.e. joists, beams, lintels, posts, girders, rafters, purlins, trusses, corbels, steps, etc); up to 0.1 sqm in section;
- e) Chases of section not exceeding 50 cm in girth;
- f) Iron fixtures, such as wall ties and hold fasts for doors and windows;
- g) Cement concrete blocks as for hold fasts and holding down bolts;
- h) Wall plates, bed plaros, and bearing of slabs, CHAJJAS and the like, where thickness does not exceed 10 cm and bearing does not extend over the full thickness of wall;

Reinforcement in masonry work shall be paid separately under respective items.

Damp proof course shall be measured in Sqm. No deduction shall be made and no extra shall be paid for opening upto 0.1 Sqm in area.

Plinth protection shall be measured under respective item of works executed required for completion of the work as specified.



**TECHNICAL SPECIFICATION FOR
FINISH TO MASONRY AND CONCRETE**

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 1 OF 9

VOLUME: II B

SECTION - D

SUB-SECTION – D10

FINISH TO MASONRY AND CONCRETE

SPECIFICATION NO. PE-TS-457-600-C010



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



**TECHNICAL SPECIFICATION FOR
FINISH TO MASONRY AND CONCRETE**

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 2 OF 9

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA	8
4.00.00	I.S. CODE	8
5.00.0	RATES AND MEASUREMENTS	9



TECHNICAL SPECIFICATION FOR FINISH TO MASONRY AND CONCRETE

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 3 OF 9

FINISH TO MASONRY AND CONCRETE

1.00.00 SCOPE

This Section covers finishing, installation, repairing, finishing, curing, testing, protection, maintenance till handing over of finishing items for masonry and concrete. This shall also include the work to be done to make the surface suitable for receiving the finishing treatment.

Before commencing finishing items the Contractor shall obtain the approval of the Engineer regarding the scheduling of work to minimize damage by other trades. He shall also undertake normal precaution to prevent damage or disfiguration to work of other trades or other installation.

2.00.01 INSTALLATION

2.01.00 Preparation of Surface

All joints in masonry walls shall be raked out to a depth of at least 10 mm with a hooked tool made for the purpose while the mortar is still green. Walls shall be rushed down with stiff wire brush to remove all loose dust from joints and thoroughly, washed with water. All laitance shall be removed from concrete to be plastered.

For all types of flooring, skirting and dado work, the base cement concrete slab or masonry surface shall be roughened by chipping and cleaned of all dirt, grease or loose particles by hard brush and water. The surface shall be thoroughly moist to prevent absorption of water from the base course. Any excess of water shall be mopped up.

At any point, the level of base shall be lower than the theoretical finished floor level by the thickness of floor finish. Any chipping or filling to be done to bring the base in the required level shall be brought to the notice of the Engineer and his approval shall be taken regarding the method and extent of rectification work required.

Prior to commencement of actual finishing work, the approval of the Engineer shall be taken as to the acceptability of the base.

2.02.00 PLASTERING

2.02.01 Mortar

Mortar for plastering shall be as specified.

For sand cement plaster, sand and cement in the specified proportion shall be mixed dry, on a watertight platform and minimum water added to achieve



TECHNICAL SPECIFICATION FOR FINISH TO MASONRY AND CONCRETE

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 4 OF 9

working consistency. The sand for plaster shall conform to IS: 1542.

No plaster, which has stood for more than half an hour, shall be used; plaster that shows tendency to become dry before this time shall have water added to it.

2.02.02 Application of Plaster

Plaster, when more than 12 mm thick, shall be applied in two coats a base coat followed by the finishing coat. Thickness of the base coat shall be sufficient to fill up all unevenness in the surface; no single coat, however, shall exceed 12 mm in thickness. The lower coat shall be thicker than the upper coat; the overall thickness of the coats shall not be less than the minimum thickness shown on the drawings. The undercoat shall be allowed to dry and shrink before applying the second coat of plaster. The undercoat shall be scratched or roughened before it is fully hardened to form a mechanical key. The method of application shall be 'thrown on' rather than 'applied by trowel'.

To ensure even thickness and true surface, patches of plaster about 100 mm to 150 mm square or wooden screed 75 mm wide and of the thickness of the plaster, shall be fixed vertically about 2000 mm to 3000 mm apart, to act as gauges. The finished wall surface shall be true to plumb, and the Contractor shall, without any extra cost to the Owner, make up any irregularity in the brickwork with plaster.

All vertical edges of brick pillars, doorjambs etc. shall be chamfered or rounded off as directed by the Engineer. All drips, grooves, mouldings and cornices as shown on drawing or instructed by the Engineer shall be done with special care to maintain true lines, levels and profiles. After the plastering work is completed, all debris shall be removed and the area left clean. Any plastering that is damaged shall be repaired and left in good condition at the completion of the job.

2.02.03 Finish

Generally, the standard finish shall be used unless otherwise Shown on drawing or directed by the engineer. Wherever any special treatment to the plastered surface is indicated, the work shall be done exactly as shown on the drawings, to the entire satisfaction of the engineer regarding the texture, color and finish.

a) Standard Finish

Wherever punning is indicated, the interior plaster shall be finished rough; otherwise the interior plaster shall generally be finished to a smooth surface. The exterior surface shall generally be finished with a wooden float.



TECHNICAL SPECIFICATION FOR FINISH TO MASONRY AND CONCRETE

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 5 OF 9

b) Neat Cement Finish

Immediately after achieving a true plastered surface with the help of a wooden straight edge, the entire area shall be uniformly treated with a paste of neat cement at the rate of one (1) kg. per Sq.M. and rubbed smooth with a trowel.

c) Coloured Plaster Finish

This shall be done in the same way as specified in Clause 2.02.02 but using Coloured cement in place of ordinary cement. When coloured plastering is specified in more than one coat, the topcoat only shall be made with coloured cement.

Coloured cement shall be either ready mixed material or may be obtained by mixing pigments and cement at site, as approved by the Engineer. The pigments to be mixed with cement shall conform to Appendix-A of IS: 2114 latest editions.

Samples of colouring material shall be submitted to the engineer for approval and material procured, shall conform in all respects to the approved samples, which shall remain with the Engineer. All coloured cement and/or pigments shall be stored in an approved manner in order to prevent deteriorations.

d) Pebble-dash Finish

Mortar of required thickness consisting of 1 part cement and 4 parts sand by volume shall be applied in the usual manner as described under plastering Clause 2.02.02. While the mortar is still plastic small pebbles or crushed stone of size generally from 10mm to 20mm as approved by the Engineer shall be thrown on the plastered surface. The aggregate shall be lightly tapped into the mortar with a wood float or the flat end of oil a trowel, in order to ensure satisfactory bond between the dashing and the mortar.

e) Rough-cast Finish

A wet plastic mix of 3 parts coloured cement 6 parts sand and 4 parts aggregate by volume (gravel or crushed stone of size from 6 mm to 12 as approved by the Engineer) shall be thrown on to the wall by means of a plaster's trowel and left in the rough condition.

f) Scraped Finish

Ordinary plaster as described under Clause 2.02.02 after being leveled and allowed to stiffen for a few hours, shall be scraped with a steel straight edge to remove the surface skin. The pattern shall be as approved by the



TECHNICAL SPECIFICATION FOR FINISH TO MASONRY AND CONCRETE

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 6 OF 9

Engineer.

g) Textured Finish

Mortar consisting of 1 part cement and 3 parts sand by volume shall be applied in a manner as specified under "Plastering" Clause 2.2.2 Ornamental treatments in the form of horizontal or vertical rib texture fan texture etc. shall be applied by means of suitable tools to the freshly applied plastered surface, as approved by the Engineer.

h) Sand Faced Plaster

The plaster shall be applied in 2 coats. The first coat or the scratch coat should be approximately 14mm and shall be continuously carried out without break to the full length of wall or natural breaking points such as doors, windows, etc. The scratch coat shall be dashed on the prepared surface with heavy pressure, brought to true and even surface and then lightly roughened by cross scratch lines, to provide bond for the finishing coat. The mortar proportion for this scratch coat shall be as specified in the respective item or work. The scratch coat shall be cured for at least 7 days & then allowed to dry. The second coat shall be 6mm thick and it shall not be applied until at least 10 days have elapsed after the application of scratch coat. Before application of the second coat, the scratch coat shall be evenly damped. This coat shall be applied from top to bottom in one operation & without joints; finish shall be straight, true, & even. The mortar of this coat shall be as specified under the respective item of work. White sand for finish shall be used for the second coat & for finishing work. Sand for finish shall be of even coarse size & shall be dashed on the surface & sponged.

2.02.04 Curing

All plastered surfaces after laying shall be watered, for a minimum period of seven days, by an approved method, and shall be protected from excessive heat and sunlight by suitable approved means. Moistening shall commence, as soon as the plaster has hardened sufficiently and not susceptible to damage. Each individual coat of plaster shall be kept damp continuously, for at least two days, and then dried thoroughly, before applying the next coat.

2.03.00 Pointing to masonry

All Joints of brickwork shall be raked out to a depth of 10 mm with a hooked tool made for the purpose while the mortar is still green. The brickwork shall then be brushed down with a stiff wire brush, so as to remove all loose dust from the joints and thoroughly washed with water. Mortar consisting of 1 part cement and 3 parts clean, sharp, well graded sand by volume shall be pressed carefully into the joints and finishes with suitably tools to shape as shown on



TECHNICAL SPECIFICATION FOR FINISH TO MASONRY AND CONCRETE

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 7 OF 9

the drawings. Any surplus mortar shall be scalped off the wall face leaving the surface clean.

The pointed surface shall be kept wet for at least three days for curing.

2.04.00 Plaster with Metal Lath

The supports, hangers, brackets, cleats etc. shall be as shown on drawings and/or as approved by the Engineer. These shall have a coat of prime paint before and another coat of approved paint after erection.

The metal lath shall be expanded metal, with 12 mm x 38 mm mesh, 16 thick and 3 mm wide strands. Side laps shall be minimum 12 mm and end laps 25 mm minimum. The plastering shall be minimum 20 mm thick measured from the back of lath and applied in two-layers. The mortar for plastering shall consist of 1 part cement and 4 parts sand by volume mixed as specified in plastering, Clause 2.02.01. The application, finish etc. shall be as specified under relevant clause above. Where called for a 2 mm Plaster of Paris punting shall be applied over plaster as a finishing coat to give perfectly smooth and even finish.

2.05.00 Lime Punning

For plastered surfaces, where an even smooth surface is specified, lime punning with 5 parts of shell lime properly slaked, strained and aged, mixed with 1 part clean, washed, sieved, fine sand by volume shall be done. The thickness of lime punning shall be not less than 2 mm and more than 3 mm. The plastered surface shall be saturated with water before application of the lime punning. The punning shall be applied by skilled workman and given a smooth and even finish free from undulations, cracks etc. and to the satisfaction of the Engineer.

2.06.00 Plaster of Paris Punning

Plastered surfaces, where specified shall be finished with Plaster-of-Paris punning. The material shall be from approved manufacturers and approved by the Engineer. The thickness of the punning shall be 2 mm and shall be applied by skilled workmen. The finish shall be smooth, even and free from undulation, cracks etc.

Before bulk work is taken in hand, a sample of punning shall be done on roughly 10 Sq.M. areas and approval of the Engineer taken. The work shall then be taken in hand as per approved sample.

2.07.00 Stone Facing

Stone facing where specified shall be done as shown on design drawings and



TECHNICAL SPECIFICATION FOR FINISH TO MASONRY AND CONCRETE

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 8 OF 9

approved shop drawings. The stone shall be as specified on drawings. Samples of stone shall be submitted to the Engineer for approval and then bulk purchase made. The Contractor shall submit three copies of shop drawings for the Engineer's approval before commencing the work.

The thickness of facing stone shall be not less than 25 mm unless otherwise specified on drawings.

The stone slabs shall be cut and finished to sizes as per pattern shown on drawings. They shall be fastened to wall with suitable non-corrodible anchorage as approved by the Engineer. Where mild steel clamps, stays etc. are used for anchorage, they shall be galvanized (weight of zinc coating shall not be less than 700 gms per square meter of surface) to prevent rust stains developing on the finished surface. There shall be at least 12 mm gap between the stone and masonry, which shall be filled up and packed by a mortar of 1 part cement and 3 parts of sand by volume. After the mortar is set and cured for at least four days, the exposed surface shall be rubbed and polished as approved by the Engineer.

The completed surface shall be neat, or uniform texture and acceptable to the Engineer.

Where pointing is specified on drawings it shall be done by mortar as specified on drawings.

3.00.00 ACCEPTANCE CRITERIA

Finish to masonry and concrete shall fully comply with the Specifications, approved samples and instructions of the Engineer with respect to lines, levels, thickness, colour, texture, pattern and any other special criteria as mentioned in the body of the specification or as shown on drawings.

4.00.00 I.S. CODE

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

IS: 1661: Code practice for cement and cement-lime plaster finish on wall & ceilings.

IS: 4101: code of practice for external facings and veneers.



TECHNICAL SPECIFICATION FOR FINISH TO MASONRY AND CONCRETE

SPECIFICATION NO. PE-TS-457-600-C010

VOLUME - II B

SECTION - D SUB SECTION - D10

REV.NO. 0 DATE : 19/12/2019

SHEET 9 OF 9

5.00.00 RATES AND MEASUREMENT

5.01.00 Rates

Rates shall also include providing, dismantling and removing of scaffolding, surface preparation, curing and all type of surface, shapes/ profiles and at all elevations.

5.02.00 Measurement

All plastering shall be measured net (on surface area on which it is applied) in Sqm. Plaster work shall be classified according to the type used and shall be measured separately. Plaster on ceiling and walls shall be measured separately. Soffits of stairs shall measured as plastering on ceiling.

No deduction shall be made for opening not exceeding 0.5 Sqm and for ends of beams, joints, etc. also no payment shall be made for reveals, jams, soffits, sills of these openings.

50% deduction shall be made for opening exceeding 0.5 Sqm but not exceeding 3.0 Sqm each and no addition shall be made for reveals, jams, soffits, sills etc.

In case of opening exceeding 3.0 Sqm each, deduction shall be made for opening but jams, soffits, and reveals shall be measured and paid for.



TITLE:
TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 13

VOLUME: II B

SECTION - D

SUB-SECTION – D11

PAINTING, WHITEWASHING, POLISHING

SPECIFICATION NO. PE-TS-457-600-C011



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 13

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA AND TESTING	10
4.00.00	I.S. CODES AND STANDARDS	11
5.00.00	RATES AND MEASUREMENTS	12



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 13

PAINTING, WHITE WASHING, POLISHING, ETC.

1.00.00 SCOPE

This section covers painting, white washing, varnishing, polishing etc. of both interior and exterior surfaces of wood work, masonry, concrete plastering, plaster of paris, false ceiling, structural and other miscellaneous steel items, rain water down comer, floor and roof drains, soil, waste and service water pipes, and other ferrous and non-ferrous metal items.

Copper, bronze, chromium plate, Nickel, stainless steel and aluminium shall generally not be painted or finished except if otherwise specified.

Before commencing painting, the Contractor shall obtain the approval of the Engineer in writing regarding the schedule of work to minimize damage; disfiguration or staining to work of other trades or other installations.

2.00.00 INSTALLATION

2.00.01 Materials

Materials shall be highest grade products or well-known approved manufacture and shall be delivered to the site in original sealed containers, bearing brand name, manufacturer's name and colour shade, with labels intact and seals unbroken. All materials shall be subject to inspection, analysis and approved by the Engineer. It is desired that materials of one manufacturer only shall be used as far as possible and paint of one shade is obtained from the same manufacturing batch. Each and every supply of primer, finish paint etc. shall be accompanied by manufacturer's test certificate. All paint shall be subject to analysis from random samples taken at site from painters bucket, if so desired by the Engineer.

All prime coats shall be compatible to the material of the surface to be finished as well as to the finished coats to be applied.

All unspecified materials such as snellac, turpentine or linseed oil shall be of the highest quality available and shall conform to the latest IS standards. All such materials shall be made by reputable recognized manufacturers and shall be approved by the Engineer.

All colours shall be as per painting schedule and tinting and matching shall be done to the satisfaction of the Engineer. In such cases, where samples are required, they shall be executed in advance with the specified materials for the approval of the Engineer.



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 13

a) White Wash/Colour Wash

Shall be done from pure shell lime or fat lime, or a mixture of both as instructed by the engineer, and shall conform to IS: 712 latest editions. Samples of lime shall be submitted to the Engineer for approval, and lime as per approved sample shall be brought to site in unslaked condition. After slaking, it shall be allowed to remain in a tank for two days and then stirred up with a pole, until it attains the consistency of thin cream. 100 grams of gum to 6 liters of white wash water and a little of indigo or synthetic ultramarine blue shall be added to the lime. Mineral colour not affected by lime shall be added to white wash to get the required tint/shade approved by the Engineer.

b) Dry distemper

Shall be made from suitable pigments, extenders, lime proof tinters, water-soluble binders etc. and shall conform to IS: 427. The distemper shall be diluted with prescribed thinner in a manner recommended by the manufacturer. Only sufficient quantity of distemper required for a day's work shall be prepared.

c) Oil Bound Washable Distemper

Shall be of oil emulsion type containing suitable preservatives and shall conform to IS: 428. The distemper shall be diluted with prescribed thinner in a manner recommended by the manufacturer. Only sufficient quantity of distemper required for a day's work shall be prepared.

d) Waterproof Cement Paint

Shall be made from best quality white cement and lime resistant colours with accelerators, waterproofing agents and fungicides. The paint shall conform to IS: 5410.

e) Acrylic Emulsion Paint

Shall be water-based acrylic copolymer emulsion with rutile titanium dioxide and other selected pigments and fungicide conforming to IS: 5411 (Part-1). It shall exhibit excellent adhesion to plaster and cement surface and shall resist deterioration by alkali salts. The paint film shall allow the moisture in wall to escape without peeling or blistering. The paint, after it is dried, shall be able to withstand washing with mild soap and water without any deterioration in colour, or without showing flaking, blistering, or peeling.

f) Synthetic Enamel Paint



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 13

Shall be made from synthetic resins and drying oil with rutile titanium dioxide and other selected pigments to give a smooth, hard, durable and glossy finish to all exterior and resist interior surfaces. White and pastel shades shall not yellowing and darkening with aging. The paint shall conform to IS: 2932 and IS: 2933.

g) Aluminium Paint

Shall be in two pack containers and shall resist weathering. The paint shall conform to IS: 2339.

h) Varnishing

Shall be best quality alkyd varnish suitable for brushing over the tint of paint or light natural wood and shall not darken or yellow with age.

i) French Polish

Shall be made from best quality shellac, denatured spirit and other suitable alcohol soluble ingredients and made by a well known approved manufacturer. The material shall conform to IS: 348.

French polish shall not be used on bare wood it shall only be used as finishing coat on wood after the woods pretreated with a liquid wood filler conforming to IS: 345 is applied and rubbed out.

j) Bitumen paint (black bituminous anti-corrosive paint)

Bitumen based anti-corrosive paint conforming to IS: 158 shall be used.

2.00.02 Storage

The Contractor shall arrange for safe and proper storage of all materials and tools. The storage space if allotted within the building shall be adequately protected from damage, disfigurement, & stains. Paint shall be kept covered at all times and mixing shall be done in suitable containers. All necessary precautions shall be taken by the contractor to prevent fire.

2.01.00 Preparation of surface

Before starting the work the Contractor shall obtain the approval of the Engineer regarding the soundness & readiness of the surface to be painted on.



TITLE:
TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 13

2.01.02 Wood

All surfaces shall be free from, dirt and loose or peeling paints. The surface shall be rubbed down smooth. All nails & screws shall be sunk below the surface and filled with putty after applying an under coat. Small knots that do not justify cutting and sap streaks shall be covered with minimum 2 coats of pure shellace coating applied thinly & extended 25 mm beyond the area. All large, loose, or resinous knots shall be removed and filled with sound wood. All work shall be done as per IS: 2338.

2.01.02 Masonry, Concrete, and Plastered Surface

Surface shall be free from all oil, grease, efflorescence, mildew, loose paint, or other foreign and loose materials. Masonry cracks shall be cleaned out and patch filled with mortar similar to the original surface and uniformly textured. Where this type of resurfacing may lead to the finishing paint being different in shade from, the original surfaces, the resurfaces area shall be treated with minimum one coat of cement primer, which should be continued to the surrounding area for a distance of minimum 100 mm.

Surface with **Mildew or Efflorescence** shall be treated as below:

All mildewed surfaces shall be treated with an approved fungicide such as ammoniacal wash consisting of 7g of copper carbonate dissolved in 80ml liquor ammonia and diluted to water, or 2.5 percent magnesium silicofluoride solution and allowed to dry thoroughly before paint is applied.

2.01.03 Metal

The surface preparation shall be done in accordance with IS:1477(Part-1) 'Code of practice for painting of ferrous metals in building' and as directed by Engineer. All metal surfaces shall be absolutely clean, dry, and free from rust, scales, weld slag, flux deposit, wax, grease, dried soap films, foreign matters like cement mortar etc and free from existing loose red oxide zinc chromate primer and should be removed by means of wire brushes, hand scrappers, sand paper, emery cloth, emery papers, or by mechanical power tools etc. or as directed by Engineer. For exposed chemical resistant paints, surfaces shall be blast cleaned to near white metal. All galvanized iron surfaces shall be pretreated with a compatible primer according to the manufacturer's direction. Any abrasion in shop coat shall be touched up with the same quality of paint as the original coat. The actual painting work should be commenced only after obtaining clearance from the Engineer regarding proper cleaning of the surface.



TITLE:
TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 7 OF 13

2.02.00 Application

2.02.01 General

The method of application shall be as recommended by the manufacturer. In case of selection of special shades and colour (not available in standard shades) the Contractor shall mix different shades and prepare test panels of minimum size 1 meter square as per instruction of the Engineer and obtain his approval prior of application of finishing paints.

Proper tools and implements shall be used. Scaffoldings used shall be independent of the surface to be painted to avoid shade differences of the freshly repaired anchor notes.

Painting shall be done by skilled labours in a workmanlike manner. All materials shall be evenly applied so as to free of sags, runs, crawls, or other defects. All coats shall be of proper consistency. In case of application by brush, no brush marks shall be visible. The brushes shall be clean and in good condition before application of paint.

All priming undercoat for painting shall be applied by brush only, and rollers spray equipments etc. shall not be used.

No work shall be done under conditions that are unsuitable production of good results. No painting shall be done when plastering is in progress or is drying. Application of paint, which seals the surfaces to moisture shall only be done after the moisture on and below the surface has dried out.

All coats shall be thoroughly dry before succeeding coat is applied. Coats of painting as specified are intended to cover surfaces perfectly. In case the surface is not covered property by applying the specified number of coats, further coats shall be applied by the Contractor when so desired by the Engineer.

All primers and undercoats shall be tinted to approximate the colour of the finishing coats. Finished coats shall be of exact colour and shade as per approved samples and all finish shall be uniform in colour and texture. All parts of mouldings and ornaments shall be left clean and true to finish.

Painting on ferrous metal surface shall, be done as per IS: 1477 (Part I & 2). The total dry thickness of film should not be less than 120 Micron.

2.02.02 White Washing

The surface where white washing is to be applied shall be cleared of all loose materials and dirt. All holes and irregularities of the surface shall be filled up with lime putty and shall be allowed to dry up before white washing.



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 8 OF 13

One coat of whitewash shall consist of one stroke from top downwards, another from bottom upwards over the first stroke and another from left to right before the previous one dries up. Second coat shall be applied and in case the Engineer feels that one or more coats are required the Contractor shall do so without any extra cost to the Owner. No brush marks shall show on the finished surface.

2.02.03 Dry Distemper

New plastered surface shall be allowed to dry for at least two months. New lime or lime cement plastered surface shall be washed with a solution of 1 part Vinegar to 12 parts water or 1:50 sulphuric acid solution and for 24 hours after which the wall shall be thoroughly washed with clean water. For cement-plastered surface, the surface shall be washed with solution of 100 gms. of zinc sulphate to 1 litre of water and allowed to dry.

Dry distempering shall be done as per manufacturers instruction. In applying the distempers the brush, should first be applied horizontally and immediately crossed off perpendicularly. Brushing shall not be continued too long, otherwise brush marks may result.

2.02.04 Oil bound washable distemper

The distemper shall be applied after surface is primed with an alkali resistant primer, and followed by minimum two coats of oil bound washable distemper all as per manufacturer's instruction.

2.02.05 Waterproof Cement Paint

Surface to be coated with cement paint shall be washed and brushed down. As soon as the moisture has disappeared, the surface shall be given one coat of paint. Care shall be taken so that the paint does not dry out too rapidly. After 4 to 6 hours, the water shall be sprinkled over the surface to assist curing and prevent cracking. After the first coat has dried (24 to 48 hours) the second coat shall be applied in a similar manner. The finished surface shall be kept moist by occasional sprinkling with water for seven days after painting.

2.02.06 Acrylic Emulsion Paint

Paint shall be applied after providing one coat of cement primer solvent of approved quality and primer shall be conform to IS: 109. Lime gauged cement plastered surfaces shall not be painted for at least one month after plastering. A sample patch shall be painted to check alkali reaction if so desired by the Engineer. Painting shall be done strictly as per manufacturer's specification.



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 9 OF 13

2.02.07 Synthetic Enamel Paint

Shall be applied on properly primed surface. Subsequential coat shall not be applied till the previous coat is dry. The previous shall be lightly sand papered for better adhesion of subsequent coats.

2.02.08 Aluminium Paint

The paint, supplied in two pack containers shall be mixed and applied strictly as per manufacturer's direction. When more than one coat of paint is required or indicated, the next coat shall only be applied after the previous coat become hard dry.

2.02.09 Clear Synthetic Varnish

The Varnish shall be applied on wood surface after (a) filling, (b) staining & (c) sealing operations are carried out. The application of a combination of filler and stain shall not be permitted.

For the finishing coats of varnish, the surface shall be allowed to dry and be rubbed down lightly, wiped off and allowed to dry. Careful attention to cleanliness is required for varnishing. All dust and dirt shall be removed from the surface as well as from the neighbourhood. Damp atmosphere and draughts shall be avoided, and exposure to extreme heat or cold & dampness shall not be allowed.

The varnish shall be applied liberally with a brush and spread evenly over a portion of the surface with light strokes to avoid frothing. It shall be allowed to flow on white the next section is being laid on excess varnish shall then be scrapped off the brush and the first section be crossed, recrossed and then laid off lightly. The varnish once it has begun to set shall not be retouched. In case of any mistake in application, the varnish shall be removed and the work started afresh.

The varnish shall be minimum of two coats, with the first coat being a flatting varnish. This shall be allowed to dry hard and be flatted down, before applying the next coat. Sufficient time must be allowed between coats to get a hard dry surface before next coat is applied. All work shall be as per relevant IS Code.

2.02.10 French polish

All unevenness of the surface shall be rubbed down to smoothness with sand paper and the surface shall well dusted. The pores in the shall be filled up with a paste of whitening in water or methylated spirit with a suitable pigment like burnt siemme or umber.



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 10 OF 13

After application of the filler paste, the French polish shall be applied with a pad of woollen cloth covered by a fine cloth. The pad shall be moistened with polish and rubbed hard on the surface in a series of overlapping circles so that the polish is sparingly but uniformly applied over the entire area to give an even surface. A trace of linseed oil may be used on the pad for ease of application. The surface shall be allowed to dry before further coats are applied in the same manner. To finish off, the pad shall be covered with a fresh piece of clean fine cloth, slightly dampened with methylated spirit, and rubbed lightly and quickly with circular motions to leave the finished surface with a uniform texture and high gloss.

2.02.11 Chemical Resistant Paint

For chemical resistant paints, epoxy, chlorinated rubber, or vinyl butryl paint system shall be used. Manufacturer's recommendation shall be followed regarding the paint system, exposed to moderately to severe corrosive condition and subject to acid/alkali spillage & fumes, shall be followed.

2.03.00 Protection

Furniture and other movable objects, equipment, fittings and accessories shall be moved, protected and replaced upon completion of work. All stationary equipment shall be well covered so that no paint can fall on them. Work finished by other agencies shall be well protected. All protections shall be done as per instructions of the Engineer.

2.04.00 Cleaning up

In addition to provisions in general conditions the Contractor shall, upon completion of painting etc. remove all marks and make good surfaces, where paint has been splashed or splattered, including all equipment, fixtures, glass, furniture, fittings etc. to the satisfaction of the Engineer.

3.00.00 ACCEPTANCE CRITERIA AND TESTING

- a) All painted surfaces shall be uniform and pleasing in appearance.
- b) All varnished surfaces shall be of uniform texture and high glossy finish.
- c) The colour, texture etc. shall match exactly with those of approved samples.
- d) All stains, splashes, and splatters of paints and varnishes shall be removed from surrounding surfaces.



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 11 OF 13

Testing

- a) As, each part of the work is under progress, i.e. preparation of surface, providing primer, providing different coats of finishing paints, it shall be passed by the Engineer. Variation from the drawings or specification or standard etc. shall not be accepted. The Contractor shall ascertain from the Engineer as to which parts will be inspected and passed from time to time. The Contractor shall provide all necessary arrangement for inspection of the painting work during its different working phase. The Contractor shall provide necessary scaffolding, approach for inspection of the above as per direction and satisfaction of the Engineer. All the necessary cost for scaffolding, approach, platform, lighting arrangement testing and inspection shall be borne by the Contractor. Such inspection and testing will not, however, exonerate the Contractor from his responsibilities for proper workmanship, material etc.
- b) The Contractor shall carry out all sampling and necessary testing in accordance with the relevant Indian Standards and shall conduct such tests as called for by the Engineer. Where no specific testing procedure is mentioned in the relevant codes, the tests shall be carried out as per the prevalent accepted Engineering practice as per the direction of the Engineer. Tests shall be done in a laboratory, approved by the Engineer, and cost of testing shall be borne by the contractor.
- c) Material/workmanship unsuitable for acceptance shall be removed and replaced by the Contractor. The work shall be redone as per Specification of the contract and direction of the Engineer without extra cost to owner.

4.00.00

I.S. CODE

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

IS: 348 Specification for French polish

IS: 427 Specification for Distemper, dry colour as required.

IS: 428 Specification for Distemper oil emulsion, colour as required.

IS: 1477 Code of Practice for painting of ferrous metal in buildings.
(I & II)



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 12 OF 13

IS: 2338 Code of Practice for finishing of wood and
(I & II) wood based materials.

IS: 2339 Specification for Aluminium, Paints for general purposes in
dual containers.

IS: 2395 Code of Practice for painting concrete, masonry, and Plaster
surface.

IS: 2932 Specification for enamel, exterior type-1.

IS: 5410 Specification for cement paint, colour as required.

5.00.00 RATES AND MEASUREMENT

5.01.00 Rates

Rates shall be unit rates for complete items described in the “Schedule of
Items”.

Rate shall include cleaning, preparation of surface, supply and application of
primer, painting and providing all protection and scaffolding required at site.

5.02.00 Measurements

Painting over the concrete/masonry/wooden surface shall be measured net (on
the surface area on which it is applied) in Sqm.

No deduction shall be made for opening not exceeding 0.5 Sqm and ends of
beams, joints, etc. also no payment shall be made for reveals, jams, soffits, sill
of these openings.

50% deduction shall be made for opening exceeding 0.5 Sqm but not
exceeding 3.0 Sqm each and no addition shall be made for reveals, jams,
soffits, sills etc.

In case of opening exceeding 3.0 Sqm each, deduction shall be made for
opening but jams, soffits, and reveals shall be measured and paid for.

Corrugated surfaces shall be measured flat and measured area shall be
increased by 15%.

Painting of structural steel works shall be measured in M.T. of fabricated steel
(as per section D-17 clause 6.02.00 i.e Mode of measurement of technical
specification for fabrication of structural steel works) unless specified
otherwise.



TITLE:
**TECHNICAL SPECIFICATION FOR
PAINTING, WHITEWASHING,
POLISHING**

SPECIFICATION NO. PE-TS-457-600-C011

VOLUME - II B

SECTION - D SUB-SECTION – D11

REV.NO. 00 DATE 19/12/2019

SHEET 13 OF 13



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 1 OF 22

VOLUME: II B

SECTION - D

SUB-SECTION – D12

FLOOR FINISH AND ALLIED WORKS

SPECIFICATION NO. PE-TS-457-600-C012



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 2 OF 22

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	4
3.00.00	ACCEPTANCE CRITERIA	20
4.00.00	I.S. CODES	21
5.00.00	RATES AND MEASUREMENTS	21



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 3 OF 22

FLOOR FINISH AND ALLIED WORKS

1.00.0 SCOPE

This section covers furnishing, installation, finishing, curing, testing, protection, maintenance till handing over various types of floor finishes, and allied items of work as listed below

a) In Situ Finishes

- i) Integral finish to concrete base
- ii) Terrazzo finish
- iii) Granolithic finishes
- iv) Patent Stone
- v) Metallic Hardener like “Ironte”/Hardonate Finish
- vi) Mastic Asphalt finishes
- vii) Chemical Resistant finish

b) Tiled Finishes

- i) Terrazzo tile
- ii) Chequered tile
- iii) Glazed tile
- iv) Tesse rae (Mosaic etc.)
- v) Chemical Resistant
- vi) Rubber, Vinyl etc.
- vii) Stone Slab including Kota Stone.

1.01.00 Base

The base to receive the finish is covered under other relevant specifications.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 4 OF 22

1.01.01 Sequence

Commencement, scheduling and sequence of the finishing works shall be planned in detail and must be specifically approved by the Engineer in view the activities of other agencies working in that area. However, the Contractor for the finishing items shall remain fully responsible for all normal precautions and vigilance to prevent any damages whatsoever till handing over.

2.00.00 INSTALLATION

2.00.01 Special Materials

Basic materials are covered elsewhere under the Specification. In general, all such materials shall be as per relevant Codes where available. In all cases these materials shall be of the best quality available indigenously unless specified otherwise.

The materials for finishing items must be procured from well-reputed specialized manufacturers and on the basis of approval of samples by the Engineer. The materials shall be ordered, procured and stored well in advance to avoid compulsion to use substandard items to maintain in the construction schedule.

2.00.02 Workmanship

Only workers specially experienced in particular items of finishing work shall be engaged, where such workers are not readily available, with the Engineer's permission, experienced supervisors recommended by the manufacturer shall be engaged. In particular cases where the Engineer so desires the Contractor shall get the finishing items installed by the manufacturer.

2.00.03 Preparation of the Base Surface

The surface to be treated shall be thoroughly examined by the Contractor. Any rectification necessary shall be brought to the notice of the Engineer and his approval shall be taken regarding method and extent of such rectification work.

For all types of flooring, skirting, dado and similar locations, the base to receive the finish shall be adequately roughened by chipping, raking out joints and cleaning thoroughly all dirt, grease etc. with water and hard brush and detergent if required, unless otherwise directed by the manufacturer of any special finishing materials or specifically indicated in this specification.

To prevent of water from the finishing treatment the base shall be thoroughly soaked with water and all excess water mopped up.

The surface shall be bone dry where adhesives are used for fixing the finishes.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 5 OF 22

Prior to commencement of actual finishing work the approval of the Engineer shall be taken as per the acceptability of the surface.

2.01.00 In Situ Finishes

2.01.01 Integral Finish To Concrete Base

While the surface of the concrete laid as per specification for 'Cement Concrete' has been fully compacted and levelled but the concrete is still 'green' thick slurry, made with neat cement shall be applied evenly and worked in with iron floats. When the slurry starts to set it shall be pressed with iron floats to have a firm compact smooth surface without trowel mark or undulations. This finish shall be as thin as possible by using 2.2 kg. of cement per Sq.M. of area.

The surface shall be kept in shade for 24 hours and then cured for at least 7 days continuously by flooding with water. The surface shall not be subjected to any load or abrasion till 21 days after lying.

As desired by the Engineer the surface, while still 'green' shall be indented by pressing strings, the marking shall be of even depth, in straight lines and the panels shall be of uniform and symmetrical patterns.

2.01.02 Terrazzo Finish in Situ

It shall consist of an underbed and a topping laid over an already laid and matured concrete base.

a) Thickness

Unless otherwise specified the total thickness of the 'finish shall be minimum 40 mm for horizontal and 25 mm for vertical surface of which the topping shall be not less than 10 mm. While the topping shall be of uniform thickness the underbed may vary in thickness to provide necessary slopes. The vertical surface shall project out 6 mm from the adjacent plaster or other finish. Necessary cutting into the surface receiving the finish shall be done to acc ate the specified thickness. All junctions of vertical with horizontal shall be rounded neatly to uniform radius of 25 mm.

b) Mix

i) Underbed

The underbed for floors and similar horizontal surfaces shall consist of a mix of 1 parts cement, 1½ parts sand and 3 parts stone chips by volume. For vertical surfaces the mix shall consist of 1 part cement to



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 6 OF 22

3 parts sand by volume. The sand shall be coarse. The stone chips shall be 10 mm down well graded. Only sufficient water to be added to give a workable consistency.

ii) Topping

The mix for the topping shall be composed of cement, colour Pigment, marble dust and marble chips. Proportions of the ingredients shall be such as to produce the terrazzo of colour texture and pattern approved by the Engineer. The cement shall be white or gray or a mixture of the two to which pigment shall be added to achieve the desired colour. To 3 parts of this mixture 1 part marble powder by volume shall be added and thoroughly mixed dry. To 1 part of this mix 1 to 1½ parts of marble chips by volume shall be added and thoroughly mixed dry again.

The pigment must be stable and nonfading. It must be very finely ground. The marble powder shall be from White marble and shall be finer than IS Sieve No.: 30. The size of marble chips shall be between 1 mm to 20 mm. Sufficient quantity to cover each visible area shall be prepared in one lot to ensure uniform colour. Water to make it just workable shall be added to a quantity that can be used up immediately before it starts to set.

c) Laying

The underbed shall be laid in panels. The panels shall not be more than 5 Sq.M. in area of which no side shall be more than 2.5 M. long. For exposed locations the maximum area of a panel shall be 2.0 Sq.M. The panel shall be laid in alternate bays or chequered board pattern. No panel shall be cast in contact with another already laid until the latter has contracted to the full extent.

Dividing strips made of aluminium or glass shall be used for forming the panels. The strips shall exactly match the total depth of underbeds plus topping.

After laying, the underbed shall be levelled compacted and brought to proper grade with a screed or float. The topping shall be laid after about 24 hours while the underbed is still somewhat “green” but firm enough to receive the topping. A slurry of the mixture of cement and pigment already made shall be spread evenly and brushed in just before laying the topping. The topping shall be rolled for horizontal areas and thrown and pressed for vertical areas to extract all superfluous cement and water and to achieve a compact dense mass fully bonded with the underbed. The surface of the topping shall be trowelled over, pressed and brought to a smooth dense surface showing a minimum 75% area covered by marble chips in an even pattern of distribution.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 7 OF 22

d) Curing

The surface shall be left for curing for about 12 to 18 hours and then cured by allowing water to stand on the surface or by covering with wet sack for four days.

e) Grinding and Polish

When the surface has sufficiently hardened it shall be watered and ground evenly with rapid cutting coarse grade (no.80) grit blocks, till the marble chips are exposed and the surface is smooth. Then the surface shall be thoroughly washed and cleaned. A grout with already prepared mixture of cement and pigment shall be applied to fill up all pinholes. The surface shall be cured for 7 days by keeping it moist and then ground with fine grit blocks (no.: 120). It shall again be cleaned with water, the slurry applied again to fill up any pinholes that might have appeared and allowed to be cured again for 5 days. Finally, the surface is ground a third time with very fine grit blocks (no.: 320) to get smooth surface without any pinhole. A suitable machine shall do the grinding. Where grinding machine can not be used hand grinding may be allowed when the first rubbing shall be with carborundum stone of coarse grade (no.:60), second rubbing with medium grade (no.: 80) and final rubbing and polishing with fine grade (no.: 120). The surface shall be cleaned with water, dried, and covered with soil free, clean sawdust if directed by the Engineer. The final polishing shall be postponed till before handing over if desired by the Engineer. Just before handing over the surface shall be dusted with oxalic acid at the rate of 0.33 gm. per. Sq.M., water sprinkled on to it and finished by buffing with felt or hessian bobs. The floor shall be cleaned with soft moist rag and dried. However, all excess wax polish to be wiped off and the surface to be left glossy, but not slippery.

2.01.03

Granolithic Finish

Granolithic finish shall either be laid monolithically over base concrete or separately over hardened base concrete.

a) Thickness

The finish shall be average 20 mm and minimum 12 mm thick, unless specified otherwise.

b) Mix

The mix shall consist of 1 part cement: 1 part coarse sand 2 parts coarse aggregate by volume. The coarse aggregate shall be very hard like granite and well graded between 6 mm and 12 mm. Minimum quantity of water to get workability shall be added.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 8 OF 22

c) Laying of Monolithic Topping

The concrete base shall be laid as per specification “Cement Concrete” and levelled upto the required grade. The form shall remain sufficiently protruding to take the finish.

Within about 3 hours of laying the base while it is still fully -green- the topping shall be laid evenly to proper thickness and grade. If considered necessary the surface ‘ of the base shall roughened by wire brushing. Unless manual operation is permitted by the Engineer, mechanical vibrators of suitable design shall be used to press the topping firmly and work vigorously and quickly secure full bond with concrete base.

The laitance brought to the surface during compression shall be removed carefully without disturbing the stone chips. The surface shall then the lightly trowelled to remove all, marks. When sufficiently set, hand trowelling shall be done to secure a smooth surface without disturbing the stone chips.

For large areas the laying shall be in panels of maximum 25 Sq.M. area. The panels shall be laid in chequered board pattern.

d) Laying of Topping Separately on Hardened Base

The base concrete shall be prepared as stated in clause 2.00.03 and a slurry of neat cement applied just prior to laying the granolithic concrete mix (1:1:2). The method of compaction etc. shall be same as for monolithic topping.

Curing

Immediately after laying, the finish shall be protected against rapid drying. As soon as the surface had hardened sufficiently, it shall be kept continuously moist for at least 10 days by means of wet gunny bags or ponding of water on the surface. The floor shall not be exposed to heavy traffic during this period.

f) Grinding

If grinding is specified, it shall start only after the finish has fully set. Clause 2.01.02 (e) shall be followed. However, the Engineer shall decide upon the ultimate polish required.

g) Finishing

Where specified, sodium, silicate or magnesium or zinc silico fluoride treatment shall be done. The number of coats to be applied shall be as per



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 9 OF 22

approved drawings or as instructed. The concentration and method of application of the solutions shall be as specified in IS: 5491.

2.01.04 Patent Stone

It shall consist of an underbed and a topping laid on an already laid and matured concrete base.

a) Thickness

The patent stone finish shall have thickness as stipulated under clause 2.01.02 (a) except that the topping shall be 12 mm thick.

b) Mix

i) Underbed

The mix shall be as stipulated under clause 2.01.02 (b).

ii) Topping

The mix for the topping shall consist of 1 part cement and 2 part stone aggregate 6mm nominal size by volume.

c) Laying

The Patent Stone finish including the underbed shall be laid in alternate bays or in Chequered board pattern. No panel shall be cast in contact with another already laid till the contraction of the latter has already taken place.

The maximum area of each panel shall be 3 Sq.M. of which no side shall be more than 2 M. long.

A cement grout shall be applied and worked into the surface to receive the finish; the underbed then laid, compacted, and leveled to proper grade with a screed or float. The topping shall be applied evenly on the underbed while it is not fully set but firm enough and rolled and pressed to get full bond. The topping shall be trowelled to a dense finish to the satisfaction of the Engineer. All trowel marks shall be mopped out with a soft cloth to give a clean smooth surface.

After the surface is sufficiently set, the finished floor shall be kept moist for 7 days for curing. If desired the finish shall be polished as directed by the Engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 10 OF 22

2.01.05

Metallic Hardener Like 'Ironite'/'Hardonate' Finish

This will consist of a topping (incorporating iron particles) to bond with concrete base while the latter is 'green'.

a) Thickness

Unless otherwise specified the metallic hardener finish shall be of 12 mm depth.

b) Material

The hardening compound shall be uniformly graded iron particles free from non-ferrous metal impurities, oil, grease, sand soluble alkaline compounds or other injurious materials when desired by the engineer, actual samples shall be tested.

c) Mix

Proportion of the metallic hardener shall be as specified or as indicated by the manufacturer. However, in absence of any such direction 1 part metallic hardener shall be mixed dry, with 4 parts cement, by weight. To this mixture 6 mm nominal size stone chips shall be added in proportion of 1 part cement (mixed with hardener) to 2 parts of stone chips by volume and uniformly mixed. Minimum quantity of water shall be added to make it workable.

d) Laying

The concrete floor shall be laid as per specification 'Cement Concrete' and levelled upto required grade. The forms, if any, shall remain sufficiently projecting to make the finish. The surface shall be roughened by wire brush as soon as possible.

The finish shall be laid while the concrete underbed is still very 'green' within about 3 hours of laying of the latter. The finish shall be of uniform thickness and even dense surface without trowel marks, pin holes etc. This topping layer shall be pressed firmly and worked vigoursly and quickly to secure full bond with the concrete base. Just when the initial set starts the surface shall be finished smoothened with steel trowel.

The finished floor shall be cured for 7 days by keeping it wet.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 11 OF 22

2.01.06 Mastic Asphalt Finish

This is a one-layer treatment on concrete or brick base.

a) Thickness

The thickness shall be as specified in the drawing.

b) Materials

Bitumen shall be industrial Bitumen of the grade 90/15 and 75/15 conforming to IS: 702.

Mineral filler shall be dry stone dust passing through 75 micron IS Sieve.

Fine aggregate shall be crushed and graded natural limestone or other hard work.

Coarse aggregate shall be crushed siliceous stone or other approved aggregate 6 mm stone chips shall be used for finish upto 20 mm thick & 10 mm chips for thicker finish.

c) Composition

Bitumen mastic shall conform IS: 1195 and shall be either brought to site in blocks weighing about 25 Kg or prepared at site. If brought in blocks, these shall be remelted in mechanically agitated mastic cookers and coarse aggregate, preferably preheated fed in successive portions until the complete change is thoroughly, incorporated. At no stage during the remelting and mixing process, shall the temperature exceed 205°C.

d) Laying

The hot mastic shall be laid on dry base surface cleaned thoroughly by wire brushing and sweeping. The mastic shall be leveled and when cooled to some extent shall be finished with a wooden float with addition of small quantity of fine sand if required. No load shall be allowed till the finish has cooled to normal temperature.

The mastic shall be laid in suitable panels of about 1.5 Sq.M. in area each formed by formers. Succeeding panels shall be laid overlapping the finish panel so as to melt its edges and form a continuous finish without joint.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 12 OF 22

2.01.07 Chemical Resistant in Situ Finish

Chemical resistant in situ finish shall be as epoxy resin with suitable filler material over a primer. The minimum thickness shall be 6 mm. About its performance the Engineer shall have to be fully satisfied by test results and examination of similar treatment already in existence. The contractor shall get it done by a specialized Manufacturer and get guarantee of performance from the organization and pass it on to the Owner in addition to his own guarantee.

2.02.00 Tiled Finish

These shall include finish tiles, stone slabs, and similar manufactured or natural items over already laid and matured base of concrete or masonry by means of an underbed or an adhesive layer.

2.02.01 Terrazzo Tile Finish

The finish will consist of manufacture terrazzo and an underbed.

a) Thickness

The total thickness including the underbed shall be minimum 40 mm for floors 30 mm for walls unless otherwise specified.

The skirting, dado and similar vertical surfaces shall project out 6 mm uniformly from the adjacent plaster or other wall finishes. The necessary cutting into the surface receiving the tiled finish, to accommodate the specified thickness shall be done.

b) Tiles: Terrazzo

The tiles shall, unless specifically permitted in special cases be machine made under quality control in a shop. The tile shall be pressed hydraulically to a minimum of 140 Kg. per Sq.cm.

Each tile shall bear on its back permanent and legible trademark of the manufacturer. All angles of the tiles shall be right angles all arises sharp and true, colour and texture of the wearing face uniform throughout. Maximum tolerance allowance length and breadth shall be ± 1 mm and the thickness ± 3 mm. Face of the tile shall be plane, free from pinholes and other blemishes.

The tiles shall be composed of a backing and topping. The topping shall be of uniform thickness not less than 10 mm.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 13 OF 22

The total thickness including the topping shall be as specified but not less than 20 mm in any case.

The backing shall be composed of 1 part ordinary gray cement and 3 parts of stone chips by weight mixed with water.

The topping shall be as specified under clause 2.01.02 (b).

The tile shall be cured at the shop for at least 14 days before delivery to the site. First grinding shall be given to the tiles at the shop before delivery. Tiles shall be packed properly to prevent damage during transit and storage. The tiles must be carefully stored to prevent staining by damp, rust, oil, and grease or other chemicals.

Tiles made in each batch shall be kept and used separately so that colour of each area of the floor may remain uniform.

The manufacturer shall supply along with the tiles the grout mix containing cement and pigment in exact proportions as used in topping of the tiles. The containers for the grout mix shall be suitably marked to relate it to the particular type and batch of tiles.

c) Mix: Underbed

The underbed for floor and similar horizontal surfaces shall be 1 part lime putty: 1 part surkhi: 2 parts coarse sand by weight mixed with sufficient water to form a stiff workable mass. For skirting and dado and all vertical surfaces it shall be about 12 mm thick and composed of 1 part cement and 3 parts coarse sand by weight.

d) Laying

The underbed mortar shall be evenly spread and brought to proper grade and consolidated to a smooth surface. The surface shall be roughened for better bond. Before the underbed had time to set and while it is still fairly moist but firm, cement shall be hand dusted over it or a cement slurry applied and the tiles shall immediately be placed upon and firmly pressed by wooden mallet on to the underbed until it achieves the desired level. The tiles shall be kept soaked for about 10 minutes just before laying. The joints between tiles shall be as close as possible and not more than 1.5 mm wide.

Special care shall be taken to check the level of the surface and the lines of the joints frequently so that they are perfect.

When tiles are required to be cut to match the dimensions these shall be sawn and edges rubbed smooth. The location of cut tiles shall be planned



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 14 OF 22

in advance and approval of the Engineer taken.

At the junction of horizontal surface with vertical surface the tiles on the former shall enter at least 12 mm under the latter.

After fixing, the floor shall be kept moist and allowed to mature undisturbed for 7 days. Heavy traffic shall not be allowed.

If desired dividing strips as specified under Clause 2.01.02(c) may be used for dividing the work into suitable panels.

e) Grinding and Polishing

Procedure shall be same as Clause 2.01.02(e). Grinding shall not commence earlier than 14 days after laying of tiles.

2.02.02 Chequered Tile Finish

The finish shall consist of manufactured gray or coloured cement tiles or terrazzo tiles with chequered face and an underbed laid over concrete or brick surface.

a) Thickness

Thickness shall be same as in clause 2.02.01 (a).

b) Tiles: Chequered

The tiles shall have chequers not less than 2.5 cm. c/c and not more than 5 cm. c/c. Depth of grooves shall be not less than 5 mm. The grooves shall be uniform and straight.

The tiles shall conform to clause 2.02.01 (b) except that these may have the topping in terrazzo or plain gray cement or colour pigment added to cement.

c) Under-bed

As per clause 2.02.01 (c).

d) Laying

As per clause 2.02.01 (d).

e) Grinding and Polishing

As per clause 2.02.01 (e) except that the tiles shall be ground and polished by hand and after laying taking special care in polishing the grooves properly and uniformly.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 15 OF 22

2.02.03

Glazed Tiles Finish

This finish shall be composed of glazed earthenware tiles with an underbed laid over a concrete or masonry base.

a) Thickness

The total thickness shall be between 20mm and 25mm including the underbed.

The tile finish on vertical surface shall project out 6 mm uniformly from the adjacent plaster or other wall finishes. The necessary cutting into the surface receiving the finish, to accommodate the specified thickness shall be done.

b) Tiles: Glazed

The tiles shall be of earthenware, covered with glaze white or coloured, plain or with designs, of 150 mm x 150 mm nominal sizes and 5.5 mm to 6 mm on thick unless otherwise specified. The tolerance shall be ± 1.5 mm for length and breadth and ± 0.5 mm for thickness specials like internal and external angles; beads, covers, cornices, corner pieces etc. shall match. The top surface of the tiles shall be glazed with a gloss or matt, unfading stable finish as desired by the Engineer. The tiles shall be flat and true to shape. The colour shall be uniform and fractured section shall be fine grained in textures, dense and homogeneous. The tiles shall be strong and free from flaws like cracks, craze, specks, crawlings, etc. and other imperfections. The edge and the underside of the tiles shall be completely free from glaze and the underside shall have ribs or indentations for better anchorage with the fixing mortar.

The coloured tiles, when supplied, shall preferably come from one batch to avoid difference in colour.

c) Mix: Underbed

The mix for the underbed shall consist of 1 part cement and 3 parts coarse sand by weight mixed with sufficient water or any other mix if specified.

c) Laying

Same as clause 2.02.01 (d).

e) Finishing

The joints shall be cleaned and flush pointed with white cement and cured for 7 days by keeping it wet. The surface shall be cleaned with soap or



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 16 OF 22

suitable detergent, washed fully, and wiped with soft cloth to prevent scratching before handing over.

2.02.04

Tesserae Finish (Mosaic etc.)

This finish consists of manufactured vitreous, glass, ceramic or similar hard small pieces set in an underbed over a concrete or masonry surface, already laid.

a) Thickness

The total thickness including the underbed shall be between 16 mm & 25 mm.

b) Tesserae Finish

These shall usually be 6 mm thick small piece of ceramic vitreous china, tinted glass, or similar hard wearing, strong, and durable material in desired shapes and sizes and patterns.

The supply shall come in the desired pattern in full or sections conveniently for handling, stuck to pieces of strong thick paper on the surface to be exposed. The gum used for this purpose must be water soluble and non-staining. The sections shall be properly marked to avoid mistakes and master drawing shall be available at the site for guidance.

c) Mix: Underbed

Same as clause 2.02.03 (c)

d) Laying

The specification for laying if given by the manufacturer of the item shall be followed provided it is approved by the Engineer. Otherwise clause 2.02.03 (d) shall generally be followed. However, instead of gray cement the slurry shall be made with white cement to fix the panels. The paper-mounted patterns in sections shall be carefully placed and pressed in position true to lines and levels. Earliest possible the paper shall be peeled off and surface examined and cleaned, joints flush pointed with white cement and cured for 7 days by keeping it wet.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION - D12

REV.NO. 00 DATE 20/12/2019

SHEET 17 OF 22

2.02.05

Chemical Resistant Tiled Finish

This shall include all varieties of special tiles used for specific chemical resistance function and an underbed over already laid concrete or masonry.

a) Tiles

The chemical resistant tiles shall be of the best indigenous Manufacture unless otherwise specified and shall be resistant to the chemical (both acid and alkali). The tiles shall have straight edges, uniform thickness, plain surface, uniform nonfading colour, and textures.

Usually the chemical resistant tiles shall not absorb water more than 2% by weight. The tiles shall have at least compression strength of 700 Kg/cm². The surface shall be abrasion resistant and durable.

b) Laying

The mortar used for setting or for underbed these tiles shall be durable, strong and chemical resistant epoxy mortar. The grout, which shall be to the full depth of tile, shall have equal chemical resistant properties. Joints shall be pointed if so desired. The setting and fixing shall be according to the manufacturer's specification approved by the Engineer.

2.02.06

Rubber, Vinyl, or Vinyl Asbestos Tiles Finish

This shall include various types of tiles manufactured from rubber, vinyl etc. set with an adhesive on concrete or masonry base. An underbed may be required to secure desirable surface and grade.

a) Thickness

The thickness of the tiles shall be as incorporated in drawing.

b) Tiles

Unless otherwise desired the tiles shall be squares of approved dimensions. The tolerance in dimensions shall be ± 1.5 mm.

The face of the tiles shall be free from porosity, blisters, cracks, embedded foreign matters or either physical defects which affect appearance or serviceability. All edges shall be cut true and square. The colour shall be nonfading and uniform in appearance, insoluble in water and resistant to alkalis, cleaning agents and usual floor polishes.

Each tile shall be marked on the back legibly and indelibly with manufacturer's trademark, the thickness, sizes, batch number, and date of



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 18 OF 22

manufacturer.

Tiles shall be delivered securely packed and stored in clean, dry well ventilated place at a temperature near about to that the tiles shall be called upon to stand ultimately.

Adhesive to be used for sticking the tiles shall be approved by the tile manufacturer. The adhesive shall have a short drying time and long life in addition to toughness.

c) Mix: Underbed

The underbed where required to make up the specified thickness or to give the required grade or to get the right type of surface shall be composed of 1 part like putty:1 part cement: 3 parts coarse sand mixed with just sufficient water to make it workable.

d) Laying

The tiles shall be kept in the room to be tiled for at least 24 hours to bring them to the same temperature as the room. For air-conditioned space, the air-conditioning shall be completed before tiling is taken up.

The surface to receive this finish shall be firm even textured but not too smooth, without undulations and other deficiencies. If an underbed is laid the same shall be cured for at least 7 days by keeping it moist and then fully dried.

The surface shall be thoroughly cleaned. All loose dust particles shall be removed. Oil and grease if any shall be completely cleaned by use of detergent.

The adhesive shall be applied to fully dry surface in desired thickness uniformly. The adhesive shall also be applied to the backs and edges of the tiles and allowed to surface dry. The tiles shall be placed neatly on the surface exactly to the approved pattern and set with a suitable tool. If the edges tend to curl, weights are to be used to keep the edges down. Special care shall be taken to avoid formation of air pockets under the tiles. The joints shall be very fine. Any adhesive squeezed out through the joints shall be removed immediately.

e) Finishing

If any adhesive mark is there on the surface a soft cloth soaked in solvent shall be used to wipe it off. The surface shall be cleaned with soft soap, dried, and polished with an approved type of polish just before handing over.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 19 OF 22

2.02.07

Stone Slab Finish: Marble, Stone, and Similar Fine Grained Stone including Kota stone

a) Thickness

The underbed shall be minimum 12 mm and average 20 mm thick. The slabs will be 20 mm thick.

b) Stone Slab

The stone slabs shall be made from selected stock, which is hard, sound, homogeneous and dense in texture and free from flaws. Angles and edges shall be true, square, and free from chipping and surface shall be plane. The slabs shall preferably be machine cut to the required dimensions. Tolerance of ± 5 mm in dimensions and ± 2 mm in thickness will be allowed. Unless specified the slabs shall be minimum 300 mm x 300 mm.

The stone slabs shall come from specific regions and in specified quality with top surface fine chisel dressed. All sides shall also be fine chisel dressed to the full depth to allow finest possible joints.

The slabs shall be delivered to the site well protected against damages and stored in dry place under cover.

c) Mix: Underbed

Same as clause 2.02.01 (c).

d) Laying

The sides and top surface of the slabs shall be machine rubbed or table rubbed with coarse sand stone and washed before laying.

The underbed mortar shall be evenly spread and brought to proper level on the area under each slab. The slab shall be laid over the underbed, pressed, and tapped down with wooden mallet to the proper level. The slab shall then be lifted and the underbed corrected as necessary and allowed to stiffen a little. Next, thick cement slurry shall be spread over the surface. The edges of the slab shall be buttered with slurry of cement, gray / white / mixed with pigment matching the colour of the stone slabs. The slab shall be gently laid and tapped with wooden mallet to bed properly to a very fine joint and to the required level. All surplus cement slurry shall be removed and the surface mopped clean with wet soft cloth. The laid finish shall be cured for 7 days by keeping it wet.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 20 OF 22

e) Polishing, Finishing

Fine chiselling shall be done to remove the slight undulations that usually exist at the joints. The polishing and finishing shall be done as specified under clause 2.02.01 (e). However, the joints shall be so fine in the case of stone slabs that grouting shall not be called for.

2.02.08

Stone Slab Finish: Sand Stone and Similar Coarse Grained Stone Finish

Generally clause 2.02.07 shall be followed except that the workmanship and finish shall not be fine as which are explained hereunder.

The slabs shall be rough chiselled or fine chiselled as specified. Tolerance may be allowed upto ± 6 mm for rough finish, but no sharp unevenness and shall be allowed. For fine chiselling the unevenness shall be limited to ± 2 mm. The sides shall be chisel dressed at least to half slab depth so that the maximum deviation from straight line shall be within 25 mm. Beyond this depth the edge may be slightly splayed.

The joint thickness shall be kept limited to 5 mm in case of rough finish and 3 mm in case of fine finish unless wider joints are specified. The joints shall be grouted with white or coloured cement. If fine joints in the flooring are specified, the edges of slabs shall be cut in such a way that it shall form an inverted 'Y'.

3.00.00

ACCEPTANCE CRITERIA

The finish shall be checked specially for:

- a) Level, Slope, Plumb as the case may be
- b) Pattern and Symmetry
- c) Alignment of joints, dividing strip etc.
- d) Colour, texture
- e) Surface finish
- f) Thickness of joints
- g) Details at edges, junctions etc.
- h) Performance
- i) Precautions specified for durability



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 21 OF 22

4.00.00

I.S. CODES

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

- IS: 777 : Glazed earthenware tiles
- IS: 1196 : Code of practice for laying bitumen mastic flooring.
- IS: 1197 : Code of practice for laying of rubber floors
- IS: 1237 : Cement concrete flooring tiles
- IS: 1443 : Code of practice for laying and finishing of cement concrete flooring tiles.
- IS: 2114 : Code of practice for laying in situ terrazzo floor.
- IS: 3461 : PVC asbestos floor tiles
- IS: 4860 : Specification for acid resistant bricks
- IS: 5518 : Code of practice for laying of flexible PVC Sheet and tile flooring.
- IS: 5491 : Code of practice for laying in situ granolithic floor topping.

5.00.00

RATES AND MEASUREMENT

5.01.00

Rates

Rates shall be for the complete work (including dividing strips, ironite, metals, tiles etc. if any) as per the schedule of items. Rates shall be applicable for application on horizontal and vertical surfaces at all elevations and for all types of work including stairs tread and riser, laying in desired pattern and panels, cost of specials (if any) rounding of corners, mouldings etc.

Rates shall be including provision of side shuttering (if required) for casting of floor in alternate panels and or without dividing strips.



TITLE:

**TECHNICAL SPECIFICATION FOR
FLOOR FINISH AND ALLIED WORKS**

SPECIFICATION NO. PE-TS-457-600-C012

VOLUME - II B

SECTION - D | SUB-SECTION – D12

REV.NO. 00 DATE 20/12/2019

SHEET 22 OF 22

5.02.00

Measurement

The finished surface shall be measured in Sqm for area unless otherwise specified. Deduction shall not be made for opening or embedded articles having area not exceeding 0.1 Sqm.



TITLE:

**TECHNICAL SPECIFICATION FOR
SHEET WORK IN ROOF AND
SIDING**

SPECIFICATION NO. PE-TS-457-600-C013

VOLUME - II B

SECTION - D | SUB-SECTION – D13

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 6

VOLUME: II B

SECTION - D

SUB-SECTION – D13

SHEET WORK IN ROOF AND SIDING

SPECIFICATION NO. PE-TS-457-600-C013



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION FOR
SHEET WORK IN ROOF AND
SIDING**

SPECIFICATION NO. PE-TS-457-600-C013

VOLUME - II B

SECTION - D | SUB-SECTION – D13

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 6

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	ACCEPTANCE CRITERIA	5
4.00.00	I.S. CODES	5
5.00.00	RATES AND MEASUREMENTS	6



TITLE:

**TECHNICAL SPECIFICATION FOR
SHEET WORK IN ROOF AND
SIDING**

SPECIFICATION NO. PE-TS-457-600-C013

VOLUME - II B

SECTION - D | SUB-SECTION - D13

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 6

SHEET WORK IN ROOF AND SIDING

1.00.00 SCOPE

This section covers supply, cutting & fabrication and erection of corrugated/plain asbestos, corrugated galvanized iron, aluminum, permanently colour coated troughed zinc-aluminium alloy coated M.S. sheet or other sheet for covering to roof and sides at various elevations as specified.

2.00.00 INSTALLATION

2.01.00 Storage of Materials

All materials shall be stored by the Contractor in proper way to prevent all damage.

2.02.00 Workmanship

The workmanship shall be according to best construction practice to give a watertight finish to the satisfaction of the Engineer. Fixing of gutters and down pipes shall be according to IS: 2527.

2.02.01 Asbestos Sheeting

Asbestos sheets of profiles as specified shall be fixed with minimum 150 mm end lap and side laps as per manufacturer's specification. Hook bolts or J-bolts shall be 8 mm dia. at 305 mm centres. Six (6) mm dia. galvanized iron seam bolt and nut with G.I. flat washers and bitumen washers shall be used for stitching ridge cappings, corner pieces, ventilators, north light curves etc.

2.02.02 C.G.I. Sheeting and Aluminium Sheeting

Side laps shall be 2 corrugations for roof and one corrugation for side sheeting. End laps shall be minimum 150 mm for roof and 100 mm for side sheeting. In ridges and hips where plain sheets are used, the end laps shall be minimum 100 mm. Holes in C.G.I. sheets shall preferably be made on the ground. The sheets should be placed on purlins/trestles and holes punched in the ridge of the corrugation from the outside inward for obtaining proper seating of limpet washers. Sheets shall be secured to sheet framing by 8 mm dia. galvanised iron hooks or J-bolts and maximum spacing of the bolts shall be 305 mm. The length of the hook or J-bolts shall be to suit the sections of the bearers. Sheets shall also be bolted at the ends at every third corrugation with 6 mm dia. galvanized iron seam bolts and G.I. flat washers and bituminous washers.



TITLE:

**TECHNICAL SPECIFICATION FOR
SHEET WORK IN ROOF AND
SIDING**

SPECIFICATION NO. PE-TS-457-600-C013

VOLUME - II B

SECTION - D | SUB-SECTION - D13

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 6

2.02.03

Fibre Glass Reinforced Plastic Sheeting

This shall be of thickness and profile as specified. Colour and light transmittance shall be as mentioned. Where used in conjunction with C.G.I. or asbestos sheeting, the end and side laps and fixing device shall be same as used for general sheeting. Where used in lieu of glass, the fixing shall be by means of timber or metal glazing beads. In all cases, the installation shall be completely watertight and able to withstand the designed wind-pressure.

2.02.04

**PERMANENT COLOUR COATED (SANDWICHED INSULATED)
METAL CLADDING SYSTEM**

- i. Troughed zinc-aluminium alloy coated (both sides) M.S. sheet having 0.6mm minimum thickness (or high tensile steel sheet having minimum yield strength of 350 Mpa of 0.5mm minimum thickness) shall be used on external face (outer face) of cladding system. Weight of coating shall not be less than 150 gm/sq.m. The outer side (exposed face) shall be permanently colour coated with Polyfluro Vinyl Coating (PVF₂) of Dry Film Thickness (DFT) 20 microns (minimum) over primer. Inner side of external sheet shall be provided with suitable pre-coating of minimum 7 microns.
- ii. Galvanised M.S. sheets of minimum 0.6mm thickness shall be used as inner liner (internal face) of cladding system. The exposed face shall be permanently colour coated with silicon modified polyester paint of DFT 20 microns (minimum) over primer. Inner face of external sheet shall be provided with suitable pre-coating of minimum 7 microns. The rate of galvanization shall not be less than 275 gm/sqm.
- iii. The permanent colour coated sheet shall meet the general requirements of IS:14246 and shall conform to class 3 for the durability.
- iv. Inner sheet shall be fixed directly to side runners and Z spacers made out of at least 2 mm thick galvanized steel sheet of grade 375 as per IS:277. Inner sheet shall be fixed at the rate not more than 1.50M centre to centre to hold the insulation and external sheeting. The fasteners shall be of high quality corrosion resistant grade of self tapping / self drilling type provided with suitable cap.
- v. The insulation shall be of bonded mineral wool of minimum thickness 50mm conforming to IS:8183, having a density of 32 Kg/cu.m. for glass wool & 48 Kg/cu.m. for rock wool.

2.02.05

**PERMANENT COLOUR COATED (NON-INSULATED) METAL
CLADDING SYSTEM**

- i. Troughed zinc-aluminium alloy coated not less than 150 gm/sq.m M.S. sheets having 0.6 mm minimum thickness (or High tensile steel sheet having



TITLE:

**TECHNICAL SPECIFICATION FOR
SHEET WORK IN ROOF AND
SIDING**

SPECIFICATION NO. PE-TS-457-600-C013

VOLUME - II B

SECTION - D | SUB-SECTION – D13

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 6

minimum yield strength of 350 Mpa of 0.5mm minimum thickness) shall be used for the cladding system. The outer side (exposed face) shall be permanently colour coated with PVF₂ paint of minimum DFT 20 microns over primer and the inner side (internal face) shall be coated with same paint of minimum DFT 12 microns over primer. These shall be fixed directly to runners. The sheets shall meet the general requirement of IS:14246 and shall conform to class 3 for the durability.

ii. FLASHING, CAPS, TRIM CLOSURES ETC.

All flashings, trim closures caps etc. required for the metal cladding system shall be made out of plain sheets having same material and coating specification as mentioned above for the outer face of the sandwiched metal cladding.

3.00.00 ACCEPTANCE CRITERIA

The installations shall present a neat appearance and shall be checked for water tightness. The following shall be checked:

- a) Side and end laps
- b) Absence of cracks, holes or damages in sheet
- c) Spacing of bolts
- d) Provision of double washers (G.I. and asbestos or bituminous washers)
- e) Proper installation of flashing.

4.00.00 I.S. CODE

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

- IS: 3007 : Code of practice for laying of asbestos cement sheets.
- IS: 2527 : Code of practice for fixing rainwater gutters and down pipes for roof drainage.
- IS: 1626 : Specification for asbestos cement building pipes, gutters and fittings.
- IS: 277 : Specification for galvanized steel sheets (plain and corrugated).



TITLE:

**TECHNICAL SPECIFICATION FOR
SHEET WORK IN ROOF AND
SIDING**

SPECIFICATION NO. PE-TS-457-600-C013

VOLUME - II B

SECTION - D | SUB-SECTION – D13

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 6

5.00.00 RATES AND MEASUREMENT

5.01.00 Rates

Rates shall be unit rate for complete item described in “Schedule of Items” and shall include all wastage.

5.02.00 Measurement

Sheeting work in roof & sides shall be measured in Sq.M. for net area of the work done. Profiled sheeting shall be measured flat and not girthed. Opening less than 0.40 Sqm shall not be deducted. No extra shall be paid for extra labour in cutting and for wastage etc. No payment shall be made for laps, flashings, sealing, fasteners etc. in sheeting works.



TITLE:

**TECHNICAL SPECIFICATION FOR
SUSPENDED CEILING**

SPECIFICATION NO. PE-TS-457-600-C014

VOLUME - II B

SECTION - D | SUB-SECTION – D14

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 6

VOLUME: II B

SECTION - D

SUB-SECTION – D14

SUSPENDED CEILING

SPECIFICATION NO. PE-TS-457-600-C014



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION FOR
SUSPENDED CEILING**

SPECIFICATION NO. PE-TS-457-600-C014

VOLUME - II B

SECTION - D | SUB-SECTION – D14

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 6

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	INSTALLATION	3
3.00.00	SAMPLES	5
4.00.00	SHOP DRAWINGS	5
5.00.00	ACCEPTANCE CRITERIA	6
6.00.00	RATES AND MEASUREMENTS	6



TITLE:

**TECHNICAL SPECIFICATION FOR
SUSPENDED CEILING**

SPECIFICATION NO. PE-TS-457-600-C014

VOLUME - II B

SECTION - D | SUB-SECTION - D14

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 6

SUSPENDED CEILING

1.00.00 SCOPE

This section covers supply and installation of suspended ceiling together with the suspension system as shown on drawing or specified in schedule of item with all materials, labour and equipments. The work shall also include providing of openings in the ceiling for lighting, air-conditioning diffusers etc. as shown on drawings or as instructed by the Engineer.

2.00.00 INSTALLATION

2.01.00 Suspension System

2.01.01 General

Suspension system shall consist of the grid supporting the ceiling panels, intermediate runner supports for the grid if any and hangers, wall angles etc. required to suspend the grid or the runners from structural works, slabs and beams.

All members of the suspension system shall be of sufficient strength and rigidity to carry, the ceiling boards or sheets in a true and level plane without exceeding a deflection of 1/360th of their span. All joints in ceiling panels shall run straight and cross joint shall be at perfect right angles. Angle moulds where shown on drawings shall be securely fixed to walls. All drillings of structural concrete and installation of suitable anchoring device for installation including welding of the suspension system shall be included in the rate. All M.S. sections used for supports etc. shall be given one coat of synthetic enamel paint over a coat of red lead primer.

2.01.02 Metal Grid Suspension System

Aluminium grid ceiling system shall be "Bead lock" as manufactured by W A Beard shell and Co. Pvt. Ltd. or Ajit India Limited or approved equal. Steel grid ceiling system shall be 'Jolly Snap Grid' as manufactured by Jolly Board Limited or approved equal.

Steel tees as intermediate members and steel channels, as end pieces will be assembled in the form of grid. Size of tees and channels shall be as required.

The cross-tees shall intersect main tee runners in pattern shown on drawing and positively locked together with intersection members. All perimeter areas shall have tee runners fixed to vertical wall surfaces and end channels shall be fixed to runners leaving return air space between vertical wall and channels,



TITLE:

**TECHNICAL SPECIFICATION FOR
SUSPENDED CEILING**

SPECIFICATION NO. PE-TS-457-600-C014

VOLUME - II B

SECTION - D | SUB-SECTION – D14

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 6

unless otherwise shown on drawings. Angle cleats or other suitable fixing device shall be fixed to the structural beams above for fixing of hangers. Main runners shall be hung by M.S. flats, angles, rods or 12G or heavier galvanized tie wire hangers at maximum 1.2 metre centres. Extra hangers shall be provided at light fixtures that are supported from the ceiling system. The spacing of main and cross runners shall be as shown on drawings. Turnbuckles shall be provided in M.S. rods for adjustment in levels.

2.02.00 Ceiling Panels

2.02.01 Material

Ceiling panels shall be best quality material in thickness and properties called for in the “Schedule of items”. The Contractor shall submit test certificates to the Engineer for approval before bulk supply. The ceiling panels may be of following type:

- a) Plaster of Paris board (decorative)
- b) Expanded polystyrene insulation board with plastic fascia.
- c) Fibre Insulation board.
- d) Bonded wooden particle board (Plain and decorative)
- e) Glass fibre reinforced polystyrene sheets.
- f) Flat asbestos sheets (with plastic fascia).

2.02.02 Installation of Ceiling Panels

Installation of Ceiling panels shall be strictly as per manufacturer’s instruction.

For concealed grid system, tiles shall be fixed to the supporting grid in manner shown on drawing or as specified by the manufacturer. Where V joints in tiles are called for in drawings, these shall be in true lines. Where flush surface is required, the joints shall be filled with approved filler material and finished to give a neat uniform surface. Special care shall be taken to neatly finish the ceiling at junctions with walls, light fixtures, diffusers etc.

2.02.03 Aluminium Lineal Ceiling System

Aluminium lineal ceiling system shall be “Luxalon 84C ” or approved equal and the installation shall be strictly as per manufacturer’s instruction/ specification subject to approval of the Engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
SUSPENDED CEILING**

SPECIFICATION NO. PE-TS-457-600-C014

VOLUME - II B

SECTION - D | SUB-SECTION – D14

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 6

Aluminium lineal ceiling shall comprise of plain panels, 84 mm wide and 12.5 mm deep with a 23.9 mm recessed flange, roll formed out of 0.5 mm thick aluminium alloy panels stove enamelled on both sides, fixed on roll-formed carriers made of enamelled 0.95 mm thick aluminium, 32 mm wide and 39 mm deep with prongs to hold panels in the module of 100mm, at maximum spacing 1.2 M centre to centre. The carriers shall be suspended from roof by 4 mm dia galvanised steel wire hangers with special height adjustment clips made out of spring steel at maximum spacing of 1.2 M c/c. Hangers shall be fixed to roof by 'J' hooks and nylon inserts. 25 mm thick resin bonded mineral wool (spintex 300 or equivalent) insulation bound in polythene shall be laid on top of panels. Lineal ceiling shall be fixed in pattern as per detailed drawings.

3.00.00 SAMPLES

Samples of Ceiling panels and metal suspension system components as noted below shall be submitted for Engineer's approval:

Panels : 3 samples approximately 300 mm square/long each

Suspension System : 3 samples of short length : each of main and secondary system

4.00.00 SHOP DRAWINGS

Shop drawings shall be submitted for approval as required and approval shall be obtained prior to delivery of suspended ceiling components. Shop drawings shall be co-coordinated with all related work and shall show the following information:

- a) A reflected ceiling plan of areas indicated to receive the ceiling showing electrical and mechanical features.
- b) Typical Intermediate framing for support where required.
- c) Hanger fastening details.
- d) Panels - unit support at ceiling penetrations.
- e) Details of splicing method for main and cross runners.
- f) A table indicating load bearing capacity of main and cross runner
- g) A note stating that the suspension system member furnished will not deflect more than 1/360 of the span under the indicated loading.



TITLE:

**TECHNICAL SPECIFICATION FOR
SUSPENDED CEILING**

SPECIFICATION NO. PE-TS-457-600-C014

VOLUME - II B

SECTION - D | SUB-SECTION – D14

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 6

5.00.00 ACCEPTANCE CRITERIA

Finished ceiling shall be at the correct plane and present a pleasing and uniform appearance, free from, sags, warps, disfigured, or damaged board. Cutouts for light fixtures, diffusers etc. shall be of exact dimensions and in exact locations.

6.00.00 RATES AND MEASUREMENT

6.01.00 Rates

Rates shall be for the complete item called for in the “Schedule of Items”. No extra payment will be made for alignment and adjustment of lighting fixtures, air-conditioning diffusers, access panels etc. The rate shall include all cutting and wastage from standard size sheets, runners/carries etc.

6.02.00 Measurement

Actual area of work shall be measured in Sqm correct to second place of decimal. However, no deduction will be made for opening upto 0.25 Sqm. each in area.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 23

VOLUME: II B

SECTION - D

SUB-SECTION – D15

**WATER SUPPLY, DRAINAGE
AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015



**Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301**



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 23

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	MATERIAL	3
3.00.00	INSTALLATION	6
4.00.00	TESTING AND ACCEPTANCE CRITERIA	17
5.00.00	I.S. CODES	20
6.00.00	RATE AND MEASUREMENT	21



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 23

WATER SUPPLY, DRAINAGE AND SANITATION**1.00.00 SCOPE**

This section covers supply of all materials labour and incidentals required for supply, laying and installation of under/over ground pipes for water supply, drainage and sanitation with all fittings, fixtures and jointing, construction of ancillary works like manholes, drop connections, gully chambers, septic tank, soak pits, surface drain etc.

The supply and installation of water supply/sanitation fixtures and accessories like water closets, urinals, wash basins, sinks, mirrors, shelves, towel rail, soap container etc. with all fittings, fixtures, water supply/sanitation pipes and water storage tanks etc.

2.00.00 MATERIAL

All materials, fittings, fixtures, and appliances shall be of the best quality conforming to relevant Indian Standard and shall be procured from approved manufacturers. Unless specifically allowed by the Engineer, the Contractor shall submit samples of fittings and fixtures, which will be retained by him for comparison when bulk supplies are received at the site. Ultimate choice of type, model, and manufacturer lies completely with the Engineer.

It shall be the responsibility of the Contractor to procure the materials selected by the Engineer. Hence orders are to be placed with the manufacturers in time, so that the materials are available at the site well ahead of their requirement.

The materials brought to the site, shall be stored in a separate secured enclosure away from the building materials. Pipe threads, sockets, and similar items shall be specially protected till final installation. Brass and other expansive items shall be kept under lock and key. Fragile items shall be checked thoroughly when received at the site and items found damaged shall not be retained at the site.

2.01.01 Pipes and Pipe Fittings

For water supply, galvanised mild steel pipe of medium grade conforming to IS: 1239 shall be used. The galvanising shall not be less than 400gm/sqm of pipe surface area. Galvanising shall be smooth and shall be subjected to testing as per IS: 2633 for uniformity of coating. The zinc coating shall be free from defects.

For Roof drainage and building sanitation works following type of pipe are coved in this Section:



TITLE:
**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 23

- a) Cast Iron pipe
- b) Steel pipe (lined, coated with bituminous composition, out coated with cement concrete or mortar or galvanized)
- c) Concrete pipe
- d) Asbestos cement pipe
- e) PVC pipe
- f) Stoneware pipe
- g) Vitrified pipe
- h) Lead pipe (not to be used for portable water)

2.02.01 Fixtures

All material, fittings, fixtures, appliances, accessories shall be of approved quality and shall be procured from reputed brands like Hindustan/Pasriware/Cera or equivalent or as approved by Engineer. The bidder shall procure the fixtures from the above named reputed manufacturers and shall mention in his bid the type & make of the fixtures he intends to use.

All items brought to the site must bear the manufacturer's identification mark. Procurements shall be made well in advance and should get inspected & approved immediately by the Engineer. All fixtures shall be adequately protected, covered, and plugged till handing over.

All fittings, gratings, fasteners, unless specified otherwise, shall be chromium plated. The chromium plating shall be of grade-2 (10micron thickness) confirming to IS: 4827. Powder coating shall be of approved colour and shall have minimum thickness (DFT) of 20micron. Stainless steel accessories shall be of grade SS-304 and from reputed manufacturer (like Salem Steel) and shall be polished bright finish.

Unless specified in the contract the fixtures shall be as specified hereinafter.

Water closet

a) European type

It shall consist of European type glazed vitreous china basin (confirming to IS: 2556, part-II), with siphon open front solid plastic seat and plastic cover, low level glazed stoneware flushing cistern with valve less fittings, supply connections and necessary fittings. All fittings shall be chromium



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 23

plated. Colour of basin, cistern, seat and cover shall be as approved by the Engineer.

b) Squatting type

It shall consist of Orissa pattern glazed vitreous china squatting pan with integral foot rests (confirming to IS:2556, part-III) and high level cast iron flushing cistern with valve less fittings, supply connections and necessary fittings. All fittings shall be chromium plated. The flushing cistern shall be painted as specified by the Engineer.

Urinals

It shall consist of wall type glazed vitreous china urinals (conforming to IS:2556), cast iron automatic flushing cistern complete with supply connections, flush pipe, lead pipes, gratings, traps and all other necessary fittings. Frequency of automatic flushing shall be approximately once every five minutes. For every four urinals (maximum) located together may be served by one cistern of adequately capacity. All fittings shall be chromium plated.

Wash Basin

It shall be made of glazed vitreous china conforming to IS:2556, part-IV. The basin shall be flat back, wall hung by painted cast-iron brackets and complete with hot and cold CP brass faucets with nylon washers, PVC connection pipe with CP brass nuts, CP brass chain with rubber plug, 32mm dia. Chromium plated brass waste of standard pattern, 32mm dia. CP brass trap union complete with necessary fittings.

Sink

It shall be made of glazed vitreous china conforming to IS:2556, part-V. It shall be wall hung by painted cast iron brackets and complete with one CP brass faucet with nylon washers, PVC connection pipe with CP brass nuts, CP brass chain with rubber plug, 40mm dia. chromium plated brass waste of standard pattern, 40mm dia. CP brass trap union complete with necessary fittings.

Bathroom mirror

It shall be made of the best quality 6 mm thick glass and produced by a reputed mirror manufacturer. It shall be wall mounted with adjustable revolving brackets. The brackets, screws, and other fittings shall be chromium plated.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 23

Glass shelves

Class shelves shall consist of 6 mm thick clear glass with guardrails and shall be wall mounted with brackets. All brackets, guardrails, and screws shall be chromium plated.

Towel rail

Towel rails shall be 20 mm dia chromium plated MS pipes wall mounted with steel brackets. The brackets, screws etc. shall also be chromium plated.

Soap holder

It shall be made of chromium plated strong members. The holders shall be wall mounted with chromium-plated screws.

Liquid Soap Dispenser

It shall be round and easily revolving with removable threaded nozzle. The body, bracket for wall mounting and screws shall be chromium plated.

Toilet roll holder

It shall be made of glazed vitreous china with suitable cover cum cutter. Wall mounting screw shall be chromium plated.

Valve, cocks, Taps

All valves, stop cocks, taps etc. shall conform to relevant Indian standard specification and shall be of best quality from approved manufacturers. These shall be suitable for normal working pressures. Nominal size and material shall be as required / specified.

2.03.00**Water Storage Tank**

Water storage tank shall be PVC of approved brand and make (Syntex or equivalent). Reservoirs made of concrete masonry or fabricated steel shall be covered by respective work specifications.

3.00.00**INSTALLATION****3.01.00****General**

Basic layouts may be available in the drawings provided, the details might have to be supplemented by the Contractor and get the approval of the Engineer before installation. Special attention shall be given to economise the layout. Symmetry of layout is very important. Fittings meant for operation



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 7 OF 23

shall be located and oriented to allow easy reach and operation. Maintenance, repairs, and replacements of pipes, fittings, and fixtures must be conveniently possible. All pipe lines, locations of fittings and fixtures, etc. shall be as per drawings or as directed by the Engineer. Correctness of lines, plumb, orientation, symmetry, and levels shall be strictly ensured. All items shall be fully secured against movement in any direction and so located as to allow easy maintenance.

All pipelines, fittings, and fixtures shall be installed leak proof. When the works under scope of this specification linked up with works executed by others, the connections shall be such as to prevent any splashing or spilling or emission of foul odour and gases.

3.02.00 Portable water supply Pipe Lines

3.02.01 Laying

In addition to fulfilling the functional requirements all pipelines shall be laid true to line, plumb and level and shall run on the surface of the walls, ceiling or in chases. Any deviation shall need approval of the Engineer. Meticulous care shall be taken to avoid chances of airlock and water hammer.

Pipes shall be laid on continuous unyielding surface or on reliable supports at least one near each joint and spacing as directed by the Engineer. The support must be strong, neat and shall have provisions for securing the pipes in every direction and easy maintenance. All pipes used for water supply should be thoroughly and efficiently disinfected before taken in to use.

3.02.02 Back Flow

The layout of pipe work shall be such that there is no possibility of back flow towards the source of supply from any cistern or appliances, whether by siphonage or otherwise. All pipe works shall be so laid or fixed and maintained as to be and to remain completely watertight, thereby avoiding waste of water, damage of property and the risk of contamination of the water conveyed.

3.02.03 Contamination

There shall be no cross connection whatsoever between a pipe/fitting for conveying or containing wholesome water and a pipe/fitting for containing impure water or water liable to contamination or of uncertain quality of water which has been used for any other purpose. No piping shall be laid or fixed so as to pass into or through any sewer, scour outlet or drain or any manhole connected therewith.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 8 OF 23

3.02.04 Underground Piping

Underground piping shall be laid at such a depth that it is not likely to be damaged by traffic and other loads and frost, where applicable. The size and depth of the trench shall be as approved by the Engineer. Back filling shall be done with selected fine earth, unless otherwise permitted, in 150 mm layers and carefully consolidated. Special care shall be taken while filling in the vicinity of the pipe to avoid damage. Before backfilling, the laid pipe shall be fully tested and approved.

Where the pipe rests on rock it may be bedded on a layer of fine selected material or concrete to avoid local point support. The trench shall be so treated by gradient and filling in the area that it does not act as a drainage channel.

3.02.05 Concealed Piping

Where desired by the Engineer or shown on the drawings the pipes shall be concealed in masonry or concrete of the structure. The Contractor may co-ordinate with the building Contractor for leaving the chases, openings, and conduits as necessary. However, the Contractor will rectify if required the chases, openings, and conduits, supplement and make good after laying and testing of the concealed pipelines.

3.02.06 Jointing of Pipes

All G.I. pipes shall be properly thread/weld jointed and made completely water tight and durable. Burr from the joints shall be removed after screwing. Union joints shall be provided for all required location to facilitate maintenance.

3.02.07 Painting

Where required, underground G.I. pipes shall be given 2 coats of bituminous paint on the outside after laying. When painting is to be done above ground G.I. pipes shall be given one coat of red lead or zinc chromate primer and top coats shall be minimum 2 coats of best quality paint as specified.

3.03.00 RAINWATER DOWN COMERS

3.03.01 Pipes

Rainwater down comers shall be standard Cast Iron or Asbestos Cement Pipes. In case where specifically desired, M.S. pipes may also be used. M.S. pipes shall be painted outside with two coats of anticorrosive paints under a coat of primer.

Rainwater down comers shall run along and be secured to walls, columns etc.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 9 OF 23

Where desired by the Engineer these may have to be installed in chases cut in the structure. All pipes shall be well secured and supported by adequately strong brackets. The brackets may be wrought iron clevis type, split ring type, or perforated strap iron type as approved by the Engineer. For vertical runs each pipe shall hang freely on its brackets fixed just below the socket. Suitable spacer blocks shall be provided against the vertical surface to which the pipe is fixed.

All bends and junctions shall be supplied with watertight cleanouts.

Roof and floor drains and yard gullies shall be installed, if required, by cutting into the structure and grouted with 1:2:4 cement concrete. All gutters shall be provided with removable gratings.

All horizontal pipes shall have a minimum fall of 1 in 100.

3.03.02 Khurras

The khurras shall be constructed before the work in parapet wall is taken up and it shall be 45x45 cm in size, unless otherwise specified and shall be formed of cement concrete of M-20 grade.

3.03.03 Gutters

The gutters shall be made of G.I. or A.C and procured from reputed specialised manufacturers. Each section shall be sufficiently rigid, edges and corners straight and the slopes perfectly uniform. G.I. gutters shall have the edges strengthened by suitable means.

Unless noted otherwise the gutters shall have a minimum fall of 1 in 120. Adequate number of string supports shall be provided so that there is no sagging even when the gutter is full. Each joint must have a support. Unless otherwise specified the supports shall be fabricated M.S. brackets. All junctions shall be thoroughly watertight. The joints may be made by riveting, bolting or soldering. All joints between successive lengths of gutters shall have an overlap of at least 5 cm. The drop in the overlap shall always be in the direction of the fall of the gutter. Ends of gutters shall be closed watertight. Junction with rainwater down comers shall be made fully watertight and secured.

3.04.00 SOIL AND DRAINAGE PIPES

3.04.01 Gradients

If not specified the minimum gradients of soil and drainage pipeline shall be as follows:



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 10 OF 23

100 mm nominal dia	:	1 in 35
150 mm nominal dia	:	1 in 65
230 mm nominal dia	:	1 in 120
300 mm nominal dia	:	1 in 200

3.04.02 Relation with water supply pipelines

Unless specifically cleared by the Engineer, under no circumstances shall drainage and sewer pipes be allowed to come close to water supply pipelines.

3.04.03 Laying

Each separate pipe shall be individually set for line and for level. Where lengths of sewer or drain pipes are laid in trench, properly painted sight rails shall be fixed across the trench at a height, equal to length of the boning rod to be used, above the required invert level of the drain or sewer at the point where the sight is fixed. More sight rails shall be required at manholes, change of gradient and intermediate positions if the distance for sighting is more than 50 ft. apart. The excavation shall be boned in at least once in every 6 ft. The foot of the boning rod shall be set on a block of wood of the exact, thickness of the wall of the pipe. Each pipe shall be separately and accurately boned between sight rails.

3.04.04 Support and Protection of Pipelines

All pipes shall be laid with sockets leading uphill. Preferably the pipe shall rest on solid and even foundations for the full length of the barrel. However, the pipe manufacturer's instruction as approved by the Engineer shall be followed in the matter of support and jointing.

To achieve full and continuous support, concrete for bedding and packing is the best. Where pipes are not bedded on concrete, the floor shall be left slightly high and carefully placed so that the pipe barrels rest on undisturbed ground. If anywhere the excavation has been carried too low packing shall be done in concrete. Where laid on rock or very hard ground which cannot be easily excavated to a smooth surface, the pipes shall be laid on a cradle of fine concrete floor of gravel and crushed stone over laid with concrete or on a well consolidated gravel and crushed stone bed as desired by the Engineer. PVC or similar pipes shall be laid directly on stable soil and packed with selected soil.

The minimum support and protection for glazed stoneware pipes shall be as follows:

- a) When cover is less than 2 metre below ground level and where pipes are unavoidably exposed above ground surface, the pipes shall be completely encased or surrounded with concrete.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 11 OF 23

- b) Where pipes are laid on soft soil with the maximum water table laying at the invert of the pipe, the sewer shall be bedded on concrete.
- c) Where the pipes have to be laid on soft soil with the maximum water table rising above the invert of the pipe, but below the top of the barrel, the pipe sewer shall be haunched.
- d) Where maximum water table is likely to rise above the top of the barrel or wherever the pipe is laid on soft soil the pipe sewers shall be completely encased or surrounded with concrete.

Vitrified clay pipes shall be laid on a bed of 150 mm thick cement concrete (1:3:6) nominal mix by volume.

Cast iron pipes and concrete pipes may be supported on suitable concrete or brick support, where specified. The supports shall be unyielding and strong enough. At least one support shall be located close to ends. Spacing of intermediate supports shall be as decided by the Engineer. Pipes shall be secured to the supports by approved means.

Anchoring of pipes where necessary shall be achieved by suitable concrete encasing designed for the expected thrust.

3.04.05 Entry into structures

For entry of the pipe lines into any building of structure suitable conduits under the structure or sleeves shall be used. The conduits and sleeves shall be such as to allow easy repairs and replacement of the pipes. When openings or chases are required to be made in the structure for entry of pipelines, locations and sizes shall be marked and checked by the Engineer. After laying of the pipeline the openings and chases shall be mended.

3.04.06 Ducts

Where solid, waste and ventilating pipes are accommodated in ducts, access to cleaning areas shall be provided. Connection to drain shall be through a gully with sealed cover to guard against ingress of sewer gas, vermin, or backflow.

3.04.07 Traps and Ventilating Pipes

Pipes are carrying off the waste from water closets and waste water and overflow water from baths, wash basins, sinks to drains shall be trapped immediately beneath such fixtures. Traps shall have minimum water seal of 50 mm and shall be ventilated whenever such ventilation is necessary to maintain water seal of the trap. Ventilating pipes shall be carried up vertically from the drain to a height of at least 600 mm above the outer covering of the roof of the building or as shown on drawings. All vertical ventilating, anti-



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 12 OF 23

syphonage and similar pipe shall be covered on top with a cowl. The cowl shall be made of C. I. unless desired otherwise by the Engineer.

3.04.08 Manhole & Inspection Chambers

At every change of alignment, gradient or diameter there shall be a manhole or inspection chamber. The maximum distance between manholes shall be 30 meter unless specially permitted otherwise. However, for truck route (for pipes above 900 mm dia.) this distance can be increased to 45 M. The distance between manhole or inspection chamber and gully chamber shall not exceed 6 metres unless desired otherwise provision of IS: 4111 (Part-1) shall be followed for construction of a manhole. Manhole shall be constructed so as to be watertight under test. The change in alignment shall be carried out in such a manner as to provide no lodgement for any splashings in case of accidental flashing of the chamber. The channel or drain at the bottom of chamber shall be plastered with 1:2 cement, sand mortar and finished smooth to the grade. The channels and drains shall be shaped and laid to provide smooth flow.

Connecting to existing sewer lines shall be through a manhole.

Unless otherwise specified, 560 mm dia. circular cast iron manhole cover with frame, heavy-duty, conforming to IS: 1726 shall be provided. The covers shall be close fittings so as to prevent gases from coming out.

3.04.09 Cutting of Pipes

Manufacturer's instructions shall be followed for cutting of pipes where necessary. Suitable and approved tools shall be used for the cutting so as to leave surface clean and square to the axis of the pipe.

3.04.10 Jointing

Jointing of pipes shall be so planned as to avoid completely any movement or strain to the joints already made. If any joint is suspected to be damaged it shall be opened out and redone.

All joints between pipes, pipes and fittings and manholes shall be gas-tight when above ground and watertight when underground. Method of jointing shall be as per instructions of the pipe and fittings manufacturer and as approved by the Engineer. However, in the absence of any instruction available from the manufacturer the methods as detailed hereunder shall be used.

a) Cast Iron Pipes

Socket and spigot pipes shall be jointed by the cast lead joints. The spigot shall be centred in the socket of the pipe by tightly caulking in sufficient



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 13 OF 23

turns of tarred gasket or hemp yarn to have unfilled half the depth of socket. When the gasket or hemp yarn has been caulked tightly a jointing shall be placed round the barrel and tightened against the face of the socket to prevent airlock. Molten lead shall then be poured in to fill the remainder of the socket and caulked with suitable tools right round the joint to make up for shrinkage of the molten metal on cooling and shall be finished 3 mm behind the socket face.

Joints in cast iron pipes with special jointing arrangements like 'Tyton' Joints etc. shall follow the instructions of the manufactures.

In special cases if flanged joints are accepted by the Engineer the joints shall be made leak proof by inserting approved type of rubber gaskets. The bolts shall be secured in stages to avoid uneven strain.

b) Concrete Pipes

Jointing of concrete pipes shall be generally of rigid type. Unless otherwise stated collar type joint shall be provided. IS: 783 shall be followed for general guidance.

The two adjoining pipes shall be butted against each other and adjoined in correct position. The collar shall then be slipped over the joint, covering equally both the pipes. The angular space shall be filled with stiff mixture of cement mortar 1:2 (1 cement : 2 sand) which shall be rammed with caulking tool. After a day's work, any extraneous material shall be removed from the inside of the pipe and the newly made joint shall be cured for 7 days.

c) Glazed Stoneware Pipes

Tarred gasket or hemp yarn soaked in thick cement slurry shall first be placed round the spigot of each pipe and the spigot shall then be placed into the socket of the pipe previously laid. The pipe shall then be adjusted and fixed in the correct position and the gasket caulked tightly so as not to fill more than 1/4 of the total depth of the socket. The remainder of the socket shall be filled with a stiff mixture of cement mortar 1:1 (1 cement : 1 sand). A fillet shall be formed round the joint with a trowel, forming an angle of 45 deg. with the barrel of the pipe. The newly made joints shall be protected, until set and shall be cured by covering with damp cloth or other suitable materials.

d) Vitrified clay pipes

The vitrified clay pipe shall be made from refractory clay mixed with crushed pottery and stone and burnt at a high temperature. These shall be hard, compact, and glazed to make them acid resistant and impervious, and



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 14 OF 23

shall be obtained from approved manufacturer.

Special care shall be taken in handling these pipes. The pipes shall not be jointed until the earth has been partly refilled over the portion of the pipe between the joint holes. Before laying the second pipe, the socket of the first pipe laid shall be thinly painted all round on the inside with cement slurry (1 part of cement and 2 parts of clean, sharp sand). A ring of rope yarn (closely twisted hemp or jute) dipped in neat cement paste or tar or bitumen, shall be inserted in the socket of pipe and driven home with caulking tools. The rope shall fully encircle the spigot with a slight overlap and shall not occupy more than one-fourth of the total depth of the socket. Where the spigot end of the pipe is made for receiving the gasket, it shall be wrapped with two or three turns of tarred spun, as close to the end as possible, before inserting into the socket. The joint shall then be completely filled with cement mortar (1:1), which shall have very little water. A fillet shall be formed round the joint with trowel, forming an angle of 45 degrees with the outside pipe. Special care shall be taken so that any excess mortar etc. left inside the pipe joints is neatly cleaned off immediately after each joint is made. A semi-circular wooden scrapper or a rubber disc to which a long handle is fixed could be used for this purpose.

e) Lead Pipes

The joints in lead pipes shall be made as wiped solder joint. The minimum and the maximum length of the wiped solder joints shall be 8 cm. and 9 cm. respectively. The solders shall generally consist of two parts of lead and one part of tin.

f) Polyethylene Pipes

The joints shall be thermo welded or bolted as per manufacturer's instructions.

g) Jointing Cast Iron Pipes with Stoneware Pipes

Where any cast iron drain pipe, ventilating pipe or trap is connected with a stoneware or semi-vitrified waste pipe, the beaded spigot end of such cast iron drain pipe, waste or ventilating pipe or trap shall be inserted into a socket of such stoneware pipe and the joint made with mortar consisting of one part of cement and one part of clean sand after placing a ratted gasket or hemp yarn soaked in neat cement slurry round the joint and inserted in it by means of a caulking tool.

h) Jointing Stoneware with Cast Iron Pipes

Where any water closet pan or earthenware trap connected to such a pan is to



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 15 OF 23

be jointed with a cast iron soil pipe, the joint between the stoneware spigot and the cast iron socket shall always be of a flexible nature. Such joint shall be made with a mixture of bitumen and chopped asbestos fibre.

3.04.11 Trenches and other excavations

Width of the trench at the bottom shall be such as to provide 200 mm clearance on either side of the pipe for facility of laying and jointing.

Excavated material shall be stacked sufficiently away from the edge of the trench and the side of the spoil bank shall not be allowed to endanger the stability of the excavation. Spoil may be carted away and used for filling the trench behind the work.

Turf, top soil or other surface material shall be set aside, turf being carefully rolled and stacked for use in reinstatement.

All excavation shall be properly timbered, where necessary.

Efficient arrangements for dewatering during excavation and keeping it dry till backfilling shall be made to the satisfaction of the Engineer. Sumps for dewatering shall be located away from the pipe layout.

Where the excavation proceeds through roads necessary permissions shall be secured by the Contractors from the appropriate authorities.

Special care shall be taken not to damage underground services, cables etc. These when exposed shall be kept adequately supported till the trench is backfilled.

The backfilling shall be done only after the pipeline has been tested and approved by the Engineer. Special care shall be taken under and sides of the pipe during hand packing with selected material. At least 300 mm over the pipe shall also be filled with soft earth or sand. Consolidation shall be done in 150 mm layers. The surface water shall be prevented from getting into the filled up trench. Traffic shall not be inconvenienced by heaping up unduly the backfilling material to compensate future settlement. All future settlements shall be made good regularly to minimize inconvenience of traffic where applicable.

3.04.12 Protection

Open end of each pipe shall be protected during installation by suitable covers or plugs so that the ends, threads, sockets, or spigot are not damaged and no foreign material can find its way into the pipeline. Fittings and fixtures liable to be misused or stolen during the construction phase shall be fitted only before testing and handing over.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 16 OF 23

3.05.00**WATER STORAGE TANKS**

Overhead/loft type water storage tank shall be made of PVC. These tanks shall be provided for each toilet block and placed on the roof/loft of the building. Tank shall be installed with proper supports and anchorage for applicable wind and seismic condition. Installation of tank shall be carried out according to the recommendation of IS: 12701. These tanks shall rest preferable on flat surface so as to distribute the load evenly. The tank shall be leakproof and water tight.

The outlet pipe shall be 50 mm above the bottom of the tank and provided preferably with strainers. The wash out or draining pipe shall be connected at the lowest point and flush with bottom of tank.

Tank shall be provided with all fittings for inlet, outlet, overflow pipes and ball valves.

3.06.00**SEPTIC TANK AND EFFLUENT DISPOSAL****3.06.01****Septic tank**

Septic tank shall consist of the tank itself with inlet and outlets there from complete with all necessary earthwork and backfilling. The details of septic tank shall be as shown on drawings. This item shall also include ventilating pipe of at least 100 mm dia whose top shall be provided with a suitable mosquito proof wiremesh and cowl. Ventilating pipe shall extend to a height of about 2 meter when the septic tank is at least 15 meter away from the nearest building and to a height of 2 meter above the top of building when it is located closer than 15 meter. Ventilating pipes can be connected to the normal soil ventilating system of the building where allowed.

3.06.02**Effluent Disposal**

The effluent from the septic tank shall be disposed by allowing it into an open channel or a body of water if the concerned authority approves or into a soak pit for absorption by soil or shall be allowed to be absorbed by soil through open jointed SW pipes laid in a trench filled with broken bricks.

3.06.03**Soak pit**

The soak pit shall be complete. It shall consist of a 900 mm dia pit 1000 mm in depth below the invert level of the inlet pipe. The pit shall be lined with stone; brick or concrete blocks set in cement mortar (1:6) and filled with brickbats. Inlet pipe shall be taken down to a depth of 900 mm from the top as an anti-mosquito measure.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 17 OF 23

3.06.04 Open joined SW Pipe/dispersion trenches

Minimum dia of the SW pipes shall be 150 mm nominal. The trench for laying the pipes shall be a minimum 600 x 600 mm. The joints of the pipes shall be left unsealed. The entire length of the pipe within the trench shall be buried in a 250 mm layer gravel or crushed stone of uniform size. On top of gravel/crushed stone layer is a 150 mm bed of well-graded coarse aggregate. Ordinary soil is used for filling the top of trench.

3.06.05 Commissioning septic tank

After the septic tank has been proved watertight and the sewage system is checked the tank shall be filled with water to its outlet level before the sewage is let into the tank. It shall be seeded with well digested sludge obtained from septic tank or sludge digestion tank. In the absence of digested sludge a small quantity of decaying organic matter such as digested cow-dung may be introduced.

3.07.00 Related Works

All works, like earthwork, masonry, concrete, steelwork, cutting holes, chases, repairs and rectification associated directly with installation of water supply and sanitation systems shall come under scope of the Contractor unless specifically excluded. These works are not detailed out in this Section.

3.08.00 Regulation

The work which is required to be carried out under this section, shall be executed by a licensed Plumber only (engaged by the Contractor) and he shall obtain all necessary sanctions, permissions, certificates etc., from Municipal and/or other Local Authorities and shall abide by all the rules of such Authorities.

4.00.00 TESTING AND ACCEPTANCE CRITERIA**4.01.00 Inspection Before installation**

All pipes, fittings, and appliance shall be inspected, before delivery at the site to see whether they conform to accepted standards. The pipes and fittings shall be inspected on site before laying and shall be sounded to disclose cracks. Any defective items shall be clearly marked as rejected and forthwith removed from the site.

4.02.00 Testing of Water Supply pipe line**4.02.01 Testing of Mains After Laying**



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 18 OF 23

After laying and jointing, the main shall be slowly and carefully charged with water, so that all air is expelled from the main by providing a 25 mm inlet with a stop-cock, allowed to stand full of water for a few days if time permits, and then tested under pressure. The test pressure shall be 5 Kg/sq.cm or double the maximum working pressure, whichever is greater. The pressure shall be applied by means of a manually operated test pump, or in the case of long mains or mains of a large diameter, by a power driven test pump, provided that the pump is not left unattached. In either case due precaution shall be taken to ensure that the required test pressure is not exceeded. Pressure gauges shall be accurate and shall preferably have been recalibrated before the test. The pump having been stopped, the test pressure shall maintain itself without measurable less for at least five minutes. The end of the main shall be closed by fitting a watertight expanding plug and the plug shall be secured by struts to resist the end thrust of the water pressure in the mains.

4.02.02 Testing of Service Pipes and Fittings

The service pipes shall be slowly and carefully charged with water allowing all air to escape avoiding all shock or water hammer. The service pipe shall then be inspected under working conditions of pressure and flow. When all draw-off taps are closed, the service pipes shall be absolutely watertight. All piping, fittings, and appliances shall be checked for satisfactory support and protection from damage, corrosion, and frost.

4.03.00 Testing of Drain and Sewerage Pipelines

All soil pipes, waste pipes, ventilating pipes and all other pipes, when above ground, shall be gas tight. All sewers and drainpipes laid below ground shall be tested water tight. The method of actual tests shall be decided by the Engineer. All test data shall be recorded and submitted to the Engineer for review and instruction. The Engineer's discretion regarding tolerance shall be final.

General guidance for the tests are given below:



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 19 OF 23

a) Smoke test

All soil pipes, waste pipes and vent pipes and all other pipes when above ground shall be approved gastight by a smoke test conducted under a pressure of 25 mm of water and maintained for 15 minutes after all trap seals have been filled with water. The smoke is produced by burning oily waste or tarpaper or similar material in the combustion chamber of a smoke machine. Chemical smokes shall not be used.

b) Water test

The pipes shall be subjected to a test pressure of at least 1.5 m head of water at the highest point of the section under tests. The tolerance figure of two litres per centimetre of diameter per kilometre may be allowed during a period of 10 (ten) minutes. The test shall be carried out by suitably plugging the low end of the drain and the ends of connections, if any, and filling the system, with water. A knuckle bend shall be temporarily jointed in at the top end and a sufficient length of the vertical pipe jointed to it so as to provide the required test head or the top end may be plugged with a connection to a hose ending in a funnel which could be raised or lowered till the required head is obtained and fixed suitably for observation.

Subsidence of test water may be due to one or more of the following cases:

- a) Absorption by pipes and joints
- b) Sweating of pipes or joints
- c) Leakage at joints or from defective pipes
- d) Trapped air.

Allowance shall be made for (a) by adding water until absorption has ceased and after which the test proper should commence. Any leakage and the defective part of the work shall be cut out and made good.

c) For straightness

- i) By inserting at the high end of the sewer or drain a smooth ball of a diameter 13 mm less than the pipe bore. In the absence of obstruction, such as yarn or mortar projecting through the joints, the ball will roll down the invert of the pipe and emerge at the lower end; and
- ii) By means of a mirror at one end of the line and lamp at the other. If the pipeline is straight, the full circle of light may be observed. The mirror will also indicate obstruction in the barrel if the pipeline is not straight.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION - D15

REV.NO. 00 DATE 19/12/2019

SHEET 20 OF 23

4.04.00**Fittings and Fixtures etc.**

All fittings and fixtures shall be connected by water tight joints. No dripping of water shall be acceptable.

4.05.00**Testing Septic Tank**

The septic tank shall be tested for water tightness. It shall be filled up with water and allowed to soak for 24 hours. Then, it shall be topped up and allowed to stand again for 24 hours and loss of level recorded. The fall shall not be more than 15 mm in 24 hrs.

5.00.00**I.S. CODES**

Important relevant IS Codes for this specification are listed below:

Latest editions shall always be consulted.

IS: 404 : Lead pipes.

IS: 407 : Brass tubes for general purposes.

IS: 458 : Concrete pipes (with or without reinforcement)

IS: 783 : Code of Practice for laying of concrete pipes.

IS: 1172 : Code of basic requirements for water supply, drainage and sanitation.

IS: 1200 : Laying of water and sewer lines, including appurtenant items.
(Pt.XVI)

IS: 1230 : Cast iron rain water pipes and fittings.

IS: 1239 : Specification for Mild Steel Tubes and Mild Steel
(Pt.I & III) Tubulars and other wrought steel pipe fittings (10 mm to 15 mm nominal diameter).

IS: 1536 : Specification for centrifugally cast (Spun) iron pressure pipes for water gas and sewage.

IS: 1537 : Specification for vertically cast iron pressure pipes for water, gas and sewage.

IS: 1592 : Asbestos cement pressure pipes,

	TITLE: TECHNICAL SPECIFICATION FOR WATER SUPPLY, DRAINAGE AND SANITATION	SPECIFICATION NO. PE-TS-457-600-C015 VOLUME - II B SECTION - D SUB-SECTION – D15 REV.NO. 00 DATE 19/12/2019 SHEET 21 OF 23
	IS: 1626 : Asbestos cement pressure pipes, gutters and fittings (Spigot and Socket types). IS: 2065 : Code of Practice for Water Supply in buildings. IS: 2501 : Copper tubes for general engineering purposes. IS: 2556 : Specification for vitreous sanitary appliances (vitreous china) Part – I - General requirement IS: 2633 : Method of testing, uniformity of coating on zinc coated articles. IS: 3076 : Low density polyethylene pipes for portable water supplies. IS: 3486 : Specification for Cast iron spigot and socket drain pipes (80 mm to 250 mm nominal diameter). IS: 3589 : Specification for Electrically welded steel pipe for water, gas and sewage (200 mm to 2000 mm nominal diameter). IS: 4827 : Specification for electro plated coatings of nickel and chromium on copper and copper alloy. IS: 4964 : High-density polyethylene pipes for portable water supplies. IS: 12701 : Rotational moulded polyethylene water storage tanks	
6.00.00	RATE AND MEASUREMENT	
6.01.00	RATE	
6.01.01	G.I. Pipes For Water Supply	
	Rate shall include providing and fixing of the pipes including all specials and fittings, such as tees, bands, elbows, clamps, drain heads, cleanouts etc. with cutting, making chases and jointing of pipes, making good the walls.	
6.01.02	Rainwater Down-comers	
	Rate shall include providing and fixing of the pipes including all specials and fittings, such as tees, bands, elbows, clamps, drain heads, cleanouts etc. The rate also include cost of jointing and making good the opening in structure.	



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 22 OF 23

6.01.03

Sanitary Fixtures

Rate shall include providing and fixing of sanitary appliances & fixtures and at all elevation, including all accessories and fittings, connections pipes, waste trap and pipes all complete as per description of “Schedule of Items”. Rate shall also include the jointing of waste & traps to drain pipes.

6.01.04

Drainage and Sewer Pipes

Rate shall be inclusive of providing, laying and jointing of pipes as specified. Rate also include cost of lead joints or other joint as specified, cost for painting and cutting and making good walls, floors etc.

6.01.05

Floor and Gully Traps

Rate of traps is inclusive of all excavation, filling, repair, making good of opening in floor and walls, grating, painting etc. complete as described in “Schedule of Items”.

6.01.06

Manholes, Septic Tank, Soak Pit and Cover

Rate of manholes, septic tank, soak pit shall be paid under respective items of work executed like brick work, plastering, concrete, reinforcement steel etc. provided for completion of the structure as per drawing and specifications. Manhole cover shall be paid separately as per description of item.

6.01.07

Water Storage Tank

The rate for water storage tank is inclusive of supply and installation of tank with all fittings, inlets, outlets, valves etc. complete.

6.02.00

MEASUREMENTS

6.02.01

Pipe for Water Supply and Drainage

For G.I.Pipe of water supply line, rainwater down comers, drainage and sewer pipe, the measurements shall be in running metres and shall be taken along centre line of pipe or specials.

The pipe shall be measured separately according to dia. and class of pipe.

Fixtures like bibcock, stopcocks, valves etc. shall be measured in numbers.



TITLE:

**TECHNICAL SPECIFICATION
FOR WATER SUPPLY,
DRAINAGE AND SANITATION**

SPECIFICATION NO. PE-TS-457-600-C015

VOLUME - II B

SECTION - D | SUB-SECTION – D15

REV.NO. 00 DATE 19/12/2019

SHEET 23 OF 23

6.02.02

Sanitary Appliances & Fixtures and Allied Works

All sanitary appliances & fixtures like sink, washbasin, WC, shall be measured in numbers for the complete work as described in schedule of items.

Floor and gully traps shall be measured in numbers unless otherwise specified.

Water storage tank shall be measured in numbers for the capacity as specified in “Schedule of Items”.

The item of work executed for completion of manholes, septic tank & soak pit shall be measured in respective items of work like brick work, RCC, plastering etc. CI cover shall be measured in numbers as specified in “Schedule of Items”.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 36

VOLUME: II B

SECTION - D

SUB-SECTION – D16

SPECIFICATION NO. PE-TS-457-600-C016

ROAD AND DRAINAGE



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 36

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.0	CODES AND STANDARDS	4
3.00.0	EXECUTION	7
4.00.00	TESTING AND ACCEPTANCE CRITERIA	36
5.00.00	MEASUREMENT	36



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 36

**Standard Technical Specification
For Road and Drainage**

1.00.00 Scope

The scope include all works required for the construction of road including construction of embankment, sub-base course, base course, tack coat, bituminous macadam, wearing course, liquid seal coat, shoulder and all incidental items of work specified or not shown but reasonably implied or necessary for the completion of the work etc.

The scope also include all works required for the construction of drainage including construction of road side drains, RCC culverts, pipe culverts, drainage pipes, manholes and all other incidental items necessary for the completion of the work etc.

1.01.00 Works To Be Provided By The Contractor

The works to be provided by the contractor unless specified otherwise shall include but not be limited to the following.

- a) Construction of roads including providing all materials, labour, supervision, services, equipments, tools and plants, transportation etc all required for the completion of the work.
- b) Submission of detailed scheme of all operations required for executing the work (e.g. material handling, placement, services, approaches etc) to the engineer for approval.
- c) Carrying out tests whenever required by the engineer to assess the quality of work and submission of the test results to the engineer after completion of the same etc.

1.02.00 Work To Be Provided By Others

No work under this specification will be provided for by any agency other than the contractor unless specifically mentioned elsewhere in the contract.

1.03.00 Conformity With Designs

The contractor shall carryout the work as per the construction drawings, specification and as directed by the engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 36

1.04.00 Materials To Be Used

All materials required for the work shall be the best commercial variety and as approved by the engineer.

2.00.00 Codes and Standards

All works under this specification shall conform to the latest revision and/or replacement of the following or any other IRC/IS Codes and Standard Practices unless specified otherwise.

- a) Specification for road and bridge works of Ministry of Shipping & Transport (Road Wing) Published by the IRC
- b) IRC: 19 - Standard specification and code of practice for Water bound Macadam
- c) IRC :SP 11 - Hand Book of Quality Control for Construction of Roads and Runways
- d) IS:456 - Indian Standard Code of Practice for Plain and Reinforced Concrete.
- e) IS:2212 - Code of Practice for Brick work
- f) IS: 783 - Code of Practice for Laying of Concrete Pipes
- g) IS: 1201 - Methods of testing tar and bituminous materials to 1220
- h) IS: 73 - Specification for paving bitumen
- i) IS: 215 - Specification for Road tar
- j) IS: 216 - Coal tar pitch
- k) IS: 217 - Specification for cut-back bitumen
- l) IS: 454 - Specification for cut-back bitumen from waxy crude
- m) IS: 1834 - Specification for hot applied sealing compound for joint in concrete
- n) IS: 1838 - Specification for performed fillers for expansion joints in concrete, non extruding and resilient type
Part I Bitumen impregnated fibre



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION - D16

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 36

Part II CNSL Aldehyde resin and coconut pith

- o) IS : 334 - Glossary of terms relating to bitumen and tar
- p) IS: 1077 - Common burnt clay building bricks
- q) IS : 3117 - Specification for bitumen emulsion roads (anionic type)
- r) IS : 1200 - Method of measurement of building and civil engineering work (Part-17)- Road work including airfield pavements
- s) Other specifications mentioned elsewhere in this specification.

In case any particular aspect of work is not covered specifically by the specification/Indian Standard Code of practices, any other standard practice as may be specified by the engineer shall be followed.

2.01.00 Quality Control

The Contractor shall establish and maintain quality control for all materials, procedures, workmanship and equipments used. All works shall conform to the lines, grades, cross sections and dimensions shown on the drawings, specification and as directed by the engineer. Permitted tolerances for road works are described hereinafter.

a) Horizontal Alignment

Horizontal alignment shall be reckoned with respect to the centre line of the carriageway as shown on the drawings. The edges of the carriageway as constructed shall be correct within a tolerance of $\pm 25\text{mm}$ therefrom. The corresponding tolerance for edges of the roadway and lower layers of the pavement shall be $\pm 40\text{mm}$.

b) Longitudinal Profile

The finished levels of the sub-grade and different pavement courses as constructed shall not vary from those calculated with reference to the longitudinal and cross-profile of the road shown on the drawings or as directed by the engineer and shall not exceed the tolerances as mentioned below.

Sub-grade $\pm 25\text{ mm}$
Sub-base $\pm 20\text{ mm}$
Base course $\pm 15\text{ mm}$
Wearing course $\pm 10\text{ mm}$

Tolerance in wearing course shall not be permitted in conjunction with the



TITLE:

TECHNICAL SPECIFICATION FOR ROAD AND DRAINAGE

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION - D16

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 36

positive tolerance on base course if the thickness of the wearing course is thereby reduced by more than 6 mm.

c) Surface Regularity of Sub-grade and Pavement Courses

The surface regularity of the completed sub-base, base course and wearing surfaces in the longitudinal and transverse directions shall be within the tolerances indicated in Table - I. The longitudinal profile shall be checked with a 3m long straight edge at the middle of each traffic lane along a line parallel to the centre of the road. The transverse profile shall be checked with a set of three camber boards at intervals of 10m.

TABLE –I

PERMITTED TOLERANCE OF SURFACE REGULARITY FOR PAVEMENT COURSES

Sl. No.	Type of Construction	Longitudinal profile with 3m straight edge				Cross Profile	
		Maximum permissible Undulation (mm)	Maximum number of undulations permitted in any 300m length with undulation exceeding (mm)				Maximum permissible variation from specified profile under camber template (mm)
			18	12	10	6	
1	2	3	4	5	6	7	8
1.	Earthen sub-grade	25	30	-	-	-	15
2.	Granular sub-base	15	-	30	-	-	12
3.	Water Bound Macadam with oversize metal (40-90 mm size)	15	-	30	-	-	12
4.	Water Bound Macadam with normal size metal (20-50 mm and 40-63 mm size), Bituminous Penetration Macadam	12	-	-	30	-	8
5.	Surface dressing** (two coat) over WBM (20-50 mm or 40-63 mm size metal), Bituminous penetration macadam	12	-	-	20	-	8
6.	Open graded premix carpet, mix seal Surfacing	10	-	-	-	30	6
7.	Bituminous macadam	10	-	-	-	20***	6



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION - D16

REV.NO. 00 DATE 19/12/2019

SHEET 7 OF 36

8.	Semi-dense carpet	10	-	-	-	20***	6
9.	Asphaltic Concrete	8	-	-	-	10***	4

Notes:

1. ** For surface dressing in all other cases, the standards of surface evenness will be the same as those for the surface receiving the surface dressing.

2. *** These are for machine laid surfaces. If laid manually due to unavoidable reasons, tolerance upto 50 percent above these values in this column may be permitted at the discretion of the Engineer. However this relaxation does not apply to the values of maximum undulation for longitudinal and cross profiles mentioned in columns 3 and 8 on the table.

3. Surface evenness requirements in respect of both the longitudinal and cross profiles should be simultaneously satisfied.

3.00.00 Execution**3.01.00 Setting Out**

Within 15 days of the award of contract, the contractor shall prepare and submit to the Engineer detailed drawings/schemes of embankment filling and excavation works as proposed to be executed by him showing the dimensions as per construction drawings and specification adding his proposals of drainage and dewatering of pits, watering and compacting the embankment fill etc. On receiving the approval from the Engineer with modifications and corrections if any, the contractor shall set out the work from the control points furnished by the Engineer and fix permanent points and markers for ease of future checking. These permanent points and markers will be checked by the Engineer and certified by him after which the contractor shall proceed with the work. It should be noted that this checking by the Engineer prior to the start of the work will in no way absolve the contractor of his responsibility of carrying out the work to true lines and levels as per the approved drawings. If any errors are noticed in the Contractor's work at any stage, the contractor at his own risk and cost shall rectify the same. Profiles of the embankment made with Bamboo, earth or other convenient materials and strings shall be set up at suitable intervals for the guidance of the workmen.

3.02.00 Clearing and Grubbing

Before commencement of earthwork, the surface area of ground to be occupied shall be cleared of all fences, trees, logs, stumps, bushes, vegetation, rubbish, slush etc. Cutting of trees shall include trees having girth of any size and removing roots upto a depth of 600mm below ground level or 300mm below formation level whichever is deeper. After the removal of roots of



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 8 OF 36

trees, the pot holes formed shall be filled with good earth in 250mm layers (loose thickness) and compacted unless otherwise directed by the Engineer. The trees shall be cut into suitable pieces as instructed by the Engineer. Before earthwork is started, all the spoils and unserviceable materials and rubbish shall be burnt or removed from the site to the approved disposal areas as may be specified. Useful materials, saleable timbers, firewood etc shall be the property of the Owner and shall be stacked properly at the work site in a manner as directed by the Engineer.

3.03.00 Filling in Embankment

3.03.01 General

The material used for constructing the embankment shall be earth, moorum, gravel or a mixture of the above or any other material approved by the Engineer. The material shall be free from lumps and clods, boulders and rock pieces, roots and vegetation, harmful salts and chemicals, organic materials, loose silts, fine sands and expansive clays in order to provide a stable embankment. The filling and compaction operation should be such that the best available materials are saved for the top portion and will result in an acceptable and uniform gradation of material and provide impermeability and stability to the embankment when compacted. The size of the coarse material in the mixture of earth shall ordinarily not exceed 75mm. However the Engineer may at his discretion permit the use of material coarser than the specified if he is satisfied that the same will not present any difficulty as regard to the placement and compaction of the fill material are concerned. Ordinarily, only the materials satisfying the density requirements as given below in Table-II shall be employed for embankment construction.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 9 OF 36

Table - II

Density Requirements of Embankment Materials

Sl. No.	Type of Work	Maximum laboratory dry density when tested as per IS: 2720 (Part - VII)
1.	Embankment upto 3m height	Not less than 1.44 gm/cc
2.	Embankment exceeding 3m height and embankment of any height subject to long period of inundation	Not less than 1.52 gm/cc
3.	Top 0.5m of the embankment below sub-base and shoulders (where earth shoulders are specified)	Not less than 1.65 gm/cc

Expansive clays exhibiting marked swell and shrinkage properties shall not be used for embankment construction.

The material for embankment construction shall be obtained from approved sources with preference given to the materials available from nearby road excavation or any other excavation under the same contract.

3.03.02 Setting Out

After the site clearance, the work shall be set out true to lines, curves, slopes, grades and sections as shown on the approved drawings or as directed by the Engineer. The contractor shall provide all labour, survey instruments and materials such as strings, pegs, nails, bamboo, stones, lime, mortar, concrete etc required in connection with the setting out of the works and establishment of the bench marks. The limits of the embankment shall be marked by fixing batter pegs on both sides at regular intervals as guides before commencing the earthwork. To ensure the safety, the pegs should normally be fixed about 500mm away from the actual limits of the fill and to be painted in a distinct colour. The centreline of the embankment shall be pegged at regular intervals of 25/30m and at all skews/curves. The actual profile of the embankment shall be made at every third centre line peg with bamboo posts and strings. Preferably prototype profiles developed with wooden planks need to be fixed at every 200m and at the intersection points at curves. The profile shall be about 3m long.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION - D16

REV.NO. 00 DATE 19/12/2019

SHEET 10 OF 36

3.03.03 Stripping and Storing top soil

The construction of the earthen embankment by filling shall conform to the dimensions, slopes and other details shown in the approved drawings. Before commencement of the embankment construction, the surface area of ground to be occupied after clearing and grubbing shall be stripped off to a minimum depth of 150mm or more as directed by the Engineer in order to remove all perishable materials and any soil which may become unstable on saturation or may interfere with the development or proper bonding between the foundation and embankment. It is not necessary to remove all the soil containing fine hair like roots but only the rather heavy mats are to be removed. In localities where most of the available embankment fill materials are not conducive to plant growth or when so directed by the Engineer, the top soil suitable for plant growth existing over the embankment foundation areas shall be stripped to specified depths not exceeding 150mm and stored for covering the embankment slopes where revegetation is desired.

3.03.04 Compacting Original Ground

In all cases, the original ground after stripping shall be compacted by rolling with a minimum six passes of 8-10 tonne roller and as directed by the Engineer.

Where the height of the proposed embankment is less than 0.5m and the original ground does not already have a relative compaction of atleast 95 percent of Standard Proctor density (maximum dry density), the same shall be loosened upto a depth of 0.5m and filled in layers not exceeding 250mm in loose thickness and each layer shall be watered and compacted to 100% maximum dry density of the fill material determined in accordance with IS:2720, Part-VII. However before relaying and compacting the loosened material, the surface below this level shall be suitably compacted as directed by the Engineer with a minimum six passes of 8 - 10 tonne roller.

Where so directed by the Engineer, any unsuitable material occurring in the embankment foundation shall be removed and replaced with approved materials suitably compacted. Embankment work shall not proceed until the foundation soil of the embankment is inspected by the Engineer and approved.

3.03.05 Filling

The embankment material shall be spread uniformly over the entire width of the embankment in layers not exceeding 250mm in loose thickness. Successive layers of embankment shall not be placed until the layer under construction has been thoroughly compacted to the requirements set down hereunder. Moisture content of the fill material shall be checked at the source of supply and if found less than that specified for compaction, the same shall



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 11 OF 36

be made good either at the source or after spreading the soil in loose thickness for compaction. In the latter case water shall be sprinkled directly from a hose line or from a truck mounted water tank and flooding shall not be permitted under any circumstances. After adding required amount of water, the soil shall be processed by means of harrows, rotary mixers or by any other approved method until the layer is uniformly wet.

If the material delivered to the road bed is too wet, it shall be dried by aeration and exposure to the sun till the moisture content is acceptable for compaction. Should circumstances arise where owing to wet weather, the moisture content cannot be reduced to the required amount by the above procedure, the work on compaction shall be suspended.

Moisture content of each layer shall be checked in accordance with IS:2720, Part-II and unless otherwise specified shall be so maintained making due allowance for evaporation losses that during compaction, the moisture content shall be in the range of 1 percent above to 2 percent below the optimum moisture content as determined in accordance with IS:2720, Part-VII.

Clods or hard lumps of earth shall be broken to have a maximum size of 150mm when being placed in the lower layers of the embankment and a maximum size of 60mm when being placed in the top 0.5m portion of the embankment below sub-base.

Hauling equipment shall be dispersed uniformly over the entire surface of the previously constructed layer to minimise rutting or uneven compaction.

Where the embankment is to be constructed across a low swampy ground that will not support the weight of trucks or other hauling equipments, the lower part of the fill shall be constructed by dumping successive loads in a uniformly distributed layer to a thickness not greater than that necessary to support the hauling equipment while placing subsequent layers.

3.03.06

Compaction

Compaction equipment approved by the Engineer shall only be employed for construction. If directed by the Engineer, the Contractor shall demonstrate the efficiency of the plant he intends to use by carrying out compaction trials. Each layer shall be thoroughly compacted to the density as specified in Table-III. Subsequent layers shall be placed only after the finished layer has been tested and accepted by the Engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 12 OF 36

Table - III

Compaction Requirements For Embankment

Sl. No.	Type of work/material	Field dry density as a percentage of maximum laboratory dry density as per IS : 2720, Part-VII
1.	Top 0.5m portion of embankment below sub-base and shoulders	Not less than 100
2.	Other portions of embankment	Not less than 95

When density measurements reveal any soft area in the embankment, further compaction shall be carried out as directed by the Engineer. If in spite of that the specified compaction is not achieved, the material in the soft area shall be removed and replaced with approved material and compacted to the density requirements and satisfaction of the Engineer.

3.03.07 Drainage

The surface of the embankment at all times during construction shall be maintained at such a cross fall as will shed water and prevent ponding.

3.03.08 Finishing Operations

Finishing operations shall include the work of shaping and dressing the shoulders, road bed and side slopes to conform the alignment, levels, cross sections and dimensions as shown on the drawings or as directed by the Engineer. Both the upper and lower ends of the side slopes shall be rounded off to improve the appearance and merge the embankment with the adjacent terrain.

3.04.00 Turfing With Sods

3.04.01 General

This work shall consist of furnishing and laying live sod of perennial turf forming grass on embankment slopes, shoulders or other locations as shown on the drawings or as directed by the Engineer. Unless otherwise specified the work shall be taken up following the construction of embankment provided the season is favourable for establishment of the sod.

3.04.02 Materials

The sod shall consist of dense, well rooted growth of permanent and desirable grasses indigenous to the locality where it is to be used and shall be practically



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 13 OF 36

free from weeds and other undesirable matters. At the time the sod is cut, the grass shall have a length of approximately 50mm and the sod shall be free from any debris.

Thickness of the sod shall be as uniform as possible with about 50 to 80mm of soil covering the grass roots depending on the nature of the sod so that practically all the dense root system of the grass are retained in the sod strip. The sods shall be cut in rectangular strips of uniform width not less than 250mm x 300mm in size but not so large so that it is convenient to handle and transport without damage. During wet weather the sod shall be allowed to dry sufficiently to prevent rearing during handling and during dry weather it shall be watered before lifting to ensure its vitality and to prevent dropping of soil during handling.

3.04.03

Placing The Sods

The area to be sodded shall be previously constructed to the required slope and cross section. Soil in the area shall be loosened, freed from all stones larger than 50mm size, sticks, stumps and any other undesirable foreign matters etc and brought to a reasonably granular texture to a depth not less than 25mm for receiving the sod.

Where required, top soil shall be spread over the slopes. Prior to placing the top soil, the slopes shall be roughened and wetted in order to have a satisfactory bond. The depth of top soil (to be spread) shall be 75mm.

Following soil preparation and top soiling (if required), fertilizer and ground limestone when specified shall be spread uniformly. After spreading, the materials shall be incorporated in the soil by discing or other means. The prepared sod bed shall be moistened if not already sufficiently moist and the sod shall be placed thereon within 24 hours after the same has been cut. Each sod strip shall be laid in close contact with each other and shall be lightly tamped with suitable wooden or metal tampers so as to eliminate air pockets and to press it into the underlying soil. At points where water may flow over the sod, the upper edges of the sod strips shall be turned into the soil below the adjacent area and a layer of earth shall be placed over it followed by thorough compaction.

3.04.04

Staking the Sods

Where the side slope is 2 to 1 or steeper and the distance along the slope is more than 2m, the sods shall be staked with pegs or nails spaced approximately 500 to 1000mm along the longitudinal axis of the sod strips. Stakes shall be driven approximately plumb through the sods and to be almost flushed with them.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 14 OF 36

3.04.05 Top Dressing

After the sods have been laid in position, the surface shall be cleaned of any loose sod, excess soil and other foreign materials. Thereafter a thin layer of top soil shall be scattered over the top dressed surface and the area shall be thoroughly moistened by sprinkling water.

3.04.06 Watering and Maintenance

The turfing so laid shall be well watered and protected until final acceptance. Watering shall be done in such a way that no erosion or damage to the sodded areas/embankment occur. The Contractor shall erect necessary warning signs and barriers, repair or replace the sods which are failing to show uniform growth of grass or damaged by his operation and shall maintain the sod at his own cost until final acceptance.

3.05.00 Shoulder Construction

3.05.01 Description

This work shall consist of constructing shoulder on either side of the pavement in accordance with the requirements of this specification and in conformity with the lines, grades and cross sections shown on the approved drawings and as directed by the Engineer.

3.05.02 Materials

Shoulder shall be made of selected earth or granular material as specified conforming to relevant IRC standards.

3.05.03 Construction Operations

Except in the case of bituminous pavements, the shoulders shall be constructed in advance to the laying of pavement courses. The compacted thickness of each layer of shoulder shall correspond to the compacted layer of pavement course to be laid adjacent to it. After compaction, the inside edges of shoulders shall be trimmed vertical and the area enclosed between the shoulders shall be cleaned of all spilled materials before proceeding with the construction of the pavement layer.

In the case of bituminous pavements, shoulder shall be constructed only after the pavement courses have been laid and compacted.

Regardless of the method of laying, all shoulder construction material shall be placed directly on the shoulder. Any spilled material dragged on to the pavement surface shall be immediately removed without any damage to the



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 15 OF 36

pavement and the area so affected shall be thoroughly cleaned. During all stages of shoulder construction, the required crossfall shall be maintained to drain off surface water.

3.06.00 Kerb

3.06.01 Material

Kerb if required for the construction of footpath shall consist of precast concrete blocks with concrete grade of M-20. The blocks shall be of 100mm thick and of suitable length. The depth of blocks unless otherwise mentioned elsewhere shall be 375mm considering 225mm height of footpath above the road level.

3.06.02 Laying

The kerb shall be laid by cutting trenches of 150mm deep. The width of the trench shall be minimum and just sufficient to insert the kerbs. The inside faces of the kerbs shall be in plumb and the gap between the block shall not be more than 10mm. The gap shall be filled with cement mortar as specified.

The kerbs shall be thoroughly packed with a mixture of stone chips (50%) and moorum (50%) at the outside face. The laying and packing shall be done in a proper workmanlike manner acceptable to the Engineer.

3.07.00 Sub-base (Granular Sub-base)

3.07.01 Description

This work shall consist of laying and compacting well graded material on the prepared sub-grade in accordance with the specification. The material shall be laid in one or more layers as shown on the drawings and shall conform to the lines, grades and cross sections shown on the drawings and as directed by the Engineer.

3.07.02 Materials

The materials to be used for the work shall be natural sand, moorum, gravel, crushed stone, crushed slag, crushed concrete, brick metal, laterite, kankar etc or combinations thereof depending upon the grading required. The mixed materials shall be free from organic and other deleterious constituents and conform to one of the three grading given in Table - IV below.

**TITLE:****TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 16 OF 36

Table - IV
Grading for Granular Sub-base Material

Sieve designation	Percent by weight passing the sieve		
	Grading 1	G r a d i n g 2	G r a d i n g 3
80 mm	100	100	100
63 mm	90 - 100	90 - 100	90 - 100
4.75 mm	35 - 70	40 - 90	50 - 100
75 micron	0 - 20	0 - 25	0 - 30
Minimum CBR value for the fraction of material passing 20 mm sieve.	30 %	25%	20%

Note : The materials passing 425micron sieve for all the three gradings when tested according to IS : 2720, Part V shall have liquid limit and plasticity index not more than 25 percent and 6 percent respectively.

3.07.03 Physical Requirements

The fraction of materials passing 20mm sieve shall give a CBR value as specified in Table – IV when tested in accordance with IS : 2720, Part XVI after preparing the samples at maximum dry density and optimum moisture content corresponding to IS : 2720, Part VII and soaking the same in water for 4 days.

3.07.04 Spreading and Compacting

Immediately prior to laying of sub-base, the sub-grade already finished shall be prepared by removing all vegetations and other extraneous matters, lightly sprinkled with water if necessary and rolled with one pass of 8 - 10 tonne smooth wheeled roller.

The sub-base material shall be spread on the sub-grade with the help of a drag spreader, motor grader or other approved means. The thickness of loose layers shall be so regulated that the maximum thickness of each layer after compaction shall not exceed 150mm.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION - D16

REV.NO. 00 DATE 19/12/2019

SHEET 17 OF 36

Moisture content of the loose material shall be checked in accordance with IS : 2720, Part II and shall be suitably adjusted by sprinkling additional water from a hose line, truck mounted water tank or other approved means so that at the time of compaction it shall be from 1 percent above to 2 percent below the optimum moisture content. While adding water, due allowance shall be made for evaporation losses. After water has been added, the material shall be processed by mechanical or other approved means if so directed by the Engineer until the layer is uniformly wet.

Immediately thereafter, rolling shall be done with 8 to 10 tonne smooth wheeled rollers or with any other approved plant. Rolling shall commence from the edges and progress towards the centre longitudinally except on super elevated portions where it shall progress from the lower to the upper edge parallel to the centre line of the pavement. Each pass of the roller shall uniformly overlap not less than one third of the track made in the preceding pass. During rolling, the grade and camber shall be checked and any high spots or depressions which become apparent shall be corrected by removing or adding fresh material.

Rolling shall be continued till the density achieved is at least 100% of the maximum dry density of the material determined as per IS : 2720, Part VII. The surface of any layer of material on completion of compaction shall be well closed, free from movement under compaction plant and from compaction planes, ridges, cracks or loose materials. All loose, segregated or otherwise defective areas shall be made good to the full thickness of layer and recompact.

3.08.00 Water Bound Macadam Sub-base/Base Course

3.08.01 Description

Water bound macadam shall consist of clean crushed aggregates mechanically interlocked by rolling and bonded together with screenings, binding material wherever necessary and water, laid on the prepared sub-grade or sub-base as the case may be and finished in accordance with the specification and in conformity with the lines, grades and cross-sections shown on the approved drawings.

3.08.02 Materials

a) Coarse Aggregates - General Requirements

Coarse aggregates shall be either crushed or broken stone. The aggregates shall conform to the physical requirements set forth in Table - V.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 18 OF 36

Table – V

Physical Requirements of Coarse Aggregates for Water Bound Macadam

Sl.No.	Type of Construction	Test	Test method	Requirements
1.	Sub-base	Los Angeles Abrasion Value * or Aggregate Impact Value	IS : 2386 (Part IV) IS : 2386 (Part IV) or IS : 5640**	50 percent maximum 40 percent maximum
2.	Base	a) Loss Angeles Abrasion value* or Aggregate Impact Value b) Flakiness Index ***	IS : 2386 (Part IV) IS : 2386 (Part IV) or IS : 5640 ** IS : 2386 (Part I)	50 percent maximum 40 percent maximum 15 percent maximum

* Aggregates shall satisfy requirements of either of the two tests.

** Aggregates like brick metal, kankar and laterite which get softened in presence of water shall be tested for impact value under conditions in accordance with IS : 5640.

*** The requirements of Flakiness Index shall be enforced only in case of crushed or broken stone and crushed slag.

b) Crushed or Broken Stone

Crushed or broken stone shall be hard, durable and free from excess flat, elongated, soft and disintegrated particles, dirt and other objectionable matters.

c) Grading Requirements of Coarse Aggregates

The coarse aggregates shall conform to one of the gradings given in Table – VI. However the use of Grading-1 shall be restricted to sub-base courses only.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 19 OF 36

**Table - VI
Grading Requirements of Coarse Aggregates**

Grading	Size range	Sieve designation	Percent by weight passing the sieve
1.	90mm to 40 mm	100 mm	100
		80 mm	65 - 85
		63 mm	25 - 60
		40 mm	0 - 15
		20 mm	0 - 5
2.	63 mm to 40 mm	80 mm	100
		63 mm	90 - 100
		50 mm	35 - 70
		40 mm	0 - 15
		20 mm	0 - 5
3.	50 mm to 20 mm	63 mm	100
		50 mm	95 - 100
		40 mm	35 - 70
		20 mm	0 - 10
		10 mm	0 - 5

d) Screenings

Screenings to fill the voids in the coarse aggregate shall generally consist of the same material as the coarse aggregates. However where permitted, predominantly non-plastic material such as moorum or gravel (other than rounded river borne material) may be used for this purpose provided liquid limit and plasticity index of such material is below 20 and 6 respectively and fraction passing 75 micron sieve does not exceed 10 percent.

As far as possible, screenings shall conform to the grading set forth in Table-VII. Screenings of Type-A in Table-VII shall be used with coarse aggregates of Grading-1 in Table-VI. Screenings of Type-A or B shall be used with coarse aggregates of Grading-2. Screenings of Type-B shall be used with coarse aggregates of Grading-3.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 20 OF 36

**Table - VII
Grading For Screenings**

Grading classification	Size of screenings	Sieve designation	Percent by weight passing the sieve
A	12.5 mm	12.5 mm	100
		10.0 mm	90 - 100
		4.75 mm	10 - 30
		150 micron	0 - 8
B	10 mm	10 mm	100
		4.75 mm	85 - 100
		150 micron	10 - 30

e) Binding Material

Binding material to be used for water bound macadam construction shall comprise of a suitable material approved by the Engineer having plasticity index value less than 6 as determined in accordance with IS : 2720, Part V. Application of binding material may not be necessary when the screenings used are of crushable type such as moorum or gravel.

3.08.03

Construction Operations

a) The sub-grade/sub-base to receive the water bound macadam coarse shall be prepared to the specified grade and camber and made free of any dust and other extraneous materials. Any ruts or soft yielding places shall be corrected in an approved manner and rolled until firm. Where water bound macadam is to be laid over an existing black topped surface, 50mm x 50mm furrows shall be cut at an angle of 45 degrees to the centre line of the road at 1m intervals in the latter before laying the coarse aggregates.

b) Inverted Choke

If water bound macadam is to be laid directly over the sub-grade without any other intervening pavement course, a 25mm course of screenings (Grading-B) shall be spread on the prepared sub-grade before application of coarse aggregates is taken up.

c) Spreading Coarse Aggregates

The coarse aggregates shall be spread uniformly over the prepared surface in such quantities that the thickness of each compacted layer is limited to 100mm for Grading-1 and 75 - 100mm for Grading-2 and 3. The spreading shall be



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 21 OF 36

done from stockpiles along the side of the roadway or directly from the vehicles. In no case shall the aggregate be dumped in heaps directly on the surface prepared to receive the aggregates nor shall hauling over permitted. The surface of the aggregates spread shall be carefully checked with templates and all high or low spots remedied by removing or adding aggregates as may be required. No segregation of large or fine particles shall be allowed and the coarse aggregates as spread shall be of uniform gradation with no pockets of fine material. The coarse aggregates shall not normally be spread more than 3 days in advance of the subsequent construction operation.

d) Rolling

Immediately following the spreading of the coarse aggregates, rolling shall be started with three wheeled power rollers of 8 to 10 tonne capacity or with tandem or vibratory rollers of approved type. The weight of the roller shall depend upon the type of the aggregate and be indicated by the Engineer.

Except on super elevated portions where the rolling shall proceed from inner edge to the outer, rolling shall begin from the edges gradually progressing towards the centre. First the edge/edges shall be compacted with roller running forward and backward. The roller shall then move inwards parallel to the centre line of the road. Each pass of the roller shall uniformly overlap not less than one half the width of the track made in the preceding pass.

Rolling shall continue until the aggregates are thoroughly keyed and the creeping of aggregates ahead of the roller is no longer visible. During rolling slight sprinkling of water may be done if necessary. Rolling shall not be done when the sub-grade is soft or yielding or when it causes a wavelike motion in the sub-grade or sub-base course.

The rolled surface shall be checked transversely and longitudinally with templates and any irregularities found shall be corrected by loosening the surface, adding or removing necessary amount of aggregates and rerolled until the entire surface conform to the desired camber and grade. In no case shall the use of screenings be permitted to make up the depressions.

e) Application of Screenings

After the coarse aggregate has been rolled, screenings to completely fill the interstices shall be applied gradually over the surface. These shall not be damp or wet at the time of application. Dry rolling shall be done while the screenings are being spread so that vibrations of the roller cause them to settle into the voids of the coarse aggregates. The screenings shall not be dumped in piles but be spread uniformly in successive thin layers either by the spreading motion of hand shovels or by mechanical spreader or directly from trucks. Trucks operating for spreading the screenings shall be so driven as not to disturb the coarse aggregates.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 22 OF 36

The screenings shall be applied at a slow and uniform rate (in three or more applications) so as to ensure filling of all voids. This shall be accompanied by dry rolling and brooming with mechanical brooms or hand brooms or with both. In no case shall the screenings be applied so fast and thick as to form cakes or ridges on the surface in such a manner as would prevent filling of voids or prevent the direct bearing of the roller on the coarse aggregate. These operations shall continue until no more screenings can be forced into the voids of the coarse aggregates.

The spreading, rolling and brooming of screenings shall be carried out in only such lengths of road which could be completed within one day's operation.

f) Sprinkling and Grouting

After the screenings have been applied, the surface shall be copiously sprinkled with water, swept and rolled. Hand brooms shall be used to seep the wet screenings into the voids and to distribute them evenly. The sprinkling, sweeping and rolling operations shall be continued with additional screenings applied as necessary until the coarse aggregates are thoroughly keyed, well bonded and firmly set to its full depth and a grout has been formed of screenings. Care shall be taken to see that the base or sub-grade does not get damaged due to the addition of excess quantity of water during construction.

g) Application of Binding Material

After the application of screenings, the binding material where it is required to be used shall be applied successively in two or more thin layers at a slow and uniform rate. After each application, the surface shall be copiously sprinkled with water and the resulting slurry shall be swept in with hand brooms or mechanical brooms to fill the voids properly and rolled during which water shall be applied to the wheels of the rollers if necessary to wash down the binding material sticking to them. These operations shall continue until the resulting slurry after filling the voids form a wave ahead of the wheels of the moving roller.

h) Setting and Drying

After the final compaction of water bound macadam course, the road shall be allowed to dry overnight. Next morning hungry spots shall be filled with screenings or binding material as directed, lightly sprinkled with water if necessary and rolled. No traffic shall be allowed on the road until the macadam is set. The Engineer shall have the discretion to stop hauling traffic from using the complete water bound macadam course if in his opinion it would cause excessive damage to the surface.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION - D16

REV.NO. 00 DATE 19/12/2019

SHEET 23 OF 36

3.09.00 Tack Coat

3.09.01 Description

The work shall consist of application of a single coat of low viscosity liquid bituminous material to an existing road surface preparatory to another bituminous construction.

3.09.02 Materials

The binder used for tack coat shall be bitumen of a suitable grade as approved by the Engineer and conforming to IS-73, IS-217 or IS-454 as applicable or any other approved cutback.

3.09.03 Construction Operations

a) Preparation of Base

The surface on which the tack coat is to be applied shall be thoroughly swept and scraped clean of dust and any other extraneous materials before the application of the binder.

b) Application of Binder

Binder shall be heated to the temperature appropriate to the grade of bitumen used and approved by the Engineer and sprayed on the base at the rate specified below. The rate of spread in terms of straight run bitumen shall be 5 kg per 10 square metre area for an untreated water bound macadam surface. The binder shall be supplied uniformly with the aid of sprayers. The tack coat shall be applied just ahead of the oncoming bituminous construction.

3.10.00 Bituminous Macadam Binder Course

3.10.01 Description

This work shall consist of construction in a single course of 50mm/75mm thickness of compacted crushed aggregates premixed with a bituminous binder laid immediately after mixing on a base prepared previously in accordance with the specification and in conformity with the lines, grades and cross sections shown on the approved drawings.

3.10.02 Materials

a) Binder

The Binder shall be straight run bitumen of a suitable grade as directed by the



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 24 OF 36

Engineer complying with IS : 73.

b) Aggregates

The aggregates shall consist of crushed stone, crushed gravel (shingle) or other stones. They shall be clean, strong, durable, fairly cubical in shape and free from any disintegrated pieces, organic and other deleterious matter and adherent coats. The aggregates shall preferably be hydrophobic and of low porosity.

The aggregates shall satisfy the physical requirements set forth in Table - VIII.

Table – VIII

Physical Requirements of Aggregates For Bituminous Macadam

Sl. No.	Test	Test method	Requirements
1.	Los Angeles Abrasion Value *	IS : 2386 (Part IV)	35 percent maximum
2.	Aggregate Impact Value *	IS : 2386 (Part IV)	30 percent maximum
3.	Flakiness Index	IS : 2386 (Part I)	35 percent maximum
4.	Stripping Value	IS : 6241 (Part IV)	25 percent maximum
5.	Water Absorption	IS : 2386 (Part III)	2 percent maximum

*Aggregates may satisfy requirements of either of the two tests.

The aggregates for bituminous macadam for different thickness shall conform to Grading- A or B as given in Table-IX or X as the case may be.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 25 OF 36

Table-IX**Aggregates Grading For 75mm Compacted Thickness of Bituminous Macadam**

Sieve Designation	Percent by weight passing the sieve	
	Grading A	Grading B
63 mm	100	
50 mm	90 - 100	
40 mm	35 - 65	100
25 mm	20 - 40	70 - 100
20 mm	-	50 - 80
12.5 mm	5 - 20	-
4.75 mm	-	10 - 30
2.36 mm	-	5 - 20
75 micron	0 - 5	0 - 4

Table-X**Aggregates Grading For 50mm Compacted Thickness of Bituminous Macadam**

Sieve Designation	Percent by weight passing the sieve	
	Grading A	Grading B
50 mm	100	
40 mm	90 - 100	
25 mm	50 - 80	100
20 mm	-	70 - 100
12.5 mm	10 - 30	-
10 mm	-	35 - 60
4.75 mm	-	15 - 35
2.36 mm	-	5 - 20
75 micron	0 - 5	0 - 4

c) Proportioning of Materials

The binder content for premixing shall be 3.5 and 4.0 percent by weight of the total mix for aggregate Grading-A and B respectively unless directed otherwise by the Engineer. The quantity of aggregates to be used shall be sufficient to yield the specified thickness after compaction.

d) Variation in Proportioning of Materials

The Contractor shall have the responsibility for ensuring proper proportioning of materials and producing a uniform mix. A variation in binder content



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 26 OF 36

upto ± 0.3 percent by weight of total mix shall however be permissible for individual specimens taken for quality control tests.

3.10.03

Construction Operations

a) Weather and Seasonal Limitations

Bituminous macadam shall not be laid during rainy weather or when the base course is damp or wet.

b) Preparation of Base

The base on which the bituminous macadam is to be laid shall be prepared, shaped and conditioned to the specified lines, grade and cross sections as shown on the drawings and as directed by the Engineer. The surface shall be thoroughly swept and scraped clean and free of any dust and foreign matter.

c) Tack Coat

A tack coat shall be applied over the base.

d) Preparation and Transport of Mix

Hot mix plant of adequate capacity shall be used for preparing the mix. The temperature of binder at the time of mixing shall be in the range 150 Deg. - 165 Deg. C and to that of aggregates shall be in the range 125 Deg. - 150 Deg. C provided the temperature difference between the binder and the aggregate at no time exceeds 25 Deg. C. Mixing shall be thorough to ensure that a homogenous mixture is obtained in which all particles of the aggregates are coated uniformly. The mixture shall be transported from the mixing plant to the point of use in a suitable vehicle. The vehicle employed for transport shall be clean and be covered over in transit if so directed by the Engineer.

e) Spreading

After mixing, the mix shall be spread immediately by means of a self propelled mechanical paver with suitable screeds capable of spreading, tamping and finishing the mix to the specified lines, grade and cross sections. However in restricted locations and in narrow widths where the available plants cannot operate in the opinion of the Engineer may permit manual laying of the mix. The temperature of mix at the time of laying shall be in the range 110 Deg. - 135 Deg. C.

In multilayer construction, the longitudinal joint in one layer shall offset into the layer below by about 150mm. However, the joint in the topmost layer shall be at the centre line of the pavement.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 27 OF 36

Longitudinal joints and edges shall be constructed true to the delineating lines parallel to the centre line of the road. All joints shall be cut vertical to the full thickness of the previously laid mix and the surface painted with hot bitumen before placing fresh material.

f) Rolling

After spreading of mix, the rolling shall be done with 8 to 10 tonne power roller or with any other approved plant. Rolling should start as soon as the materials are spread. Rolling shall be done with care to avoid any undulation in the pavement surface.

Rolling on the longitudinal joint shall be done immediately after the paving operation. After this, the rolling shall commence at the edges and progress towards the centre longitudinally except on superelevated portions where it shall progress from the lower to the upper edge parallel to the centre line of the pavement.

The initial or breakdown rolling shall be done as soon as it is possible to roll the mixture without cracking the surface and no mix pick up on the roller wheels. The second or intermediate rolling shall follow the break down rolling as early as possible and be done while the paving mix is still at a temperature that will result in maximum density. The final rolling shall be done while the material is still workable enough for removal of roller marks.

When the roller has passed over the whole area once, any high spots or depressions which become apparent shall be corrected by removing or adding fresh materials. The rolling shall then be continued till the entire surface has been rolled to compaction and there is no crushing of aggregates and till all the roller marks are eliminated. Each pass of the roller shall uniformly overlap not less than one third of the track made in the preceding pass. The roller wheels shall be kept damp if necessary to avoid the bituminous material from sticking on the wheels and being picked up. In no case shall fuel/lubricating oil be used for this purpose.

Rolling operation shall be completed in every respect before the temperature of the mix fall below 80 Deg. C.

Rollers shall not stand on the newly laid material as it may lead to undue deformation. The edges along and transverse of the bituminous macadam laid and compacted earlier shall be cut to their full depth so as to expose fresh surface which shall be painted with a thin surface coat of appropriate binder before the new mix is placed against it.

The bituminous macadam shall be provided with a final surfacing without any delay. If there is to be any delay the course shall be covered by seal coat before allowing any traffic over it.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 28 OF 36

3.11.00 Open Graded Premix Carpet

3.11.01 Description

This work shall consist of laying and compacting open graded carpet of specified thickness in a single course of suitable small sized aggregates premixed with bituminous binder on a previously prepared base to form wearing course in accordance with the specification.

3.11.02 Materials

a) Binder

The binder shall be bitumen of suitable grade as approved by the Engineer and satisfying the requirements of IS: 73, 217, 454 or any other approved cutback as applicable.

b) Aggregates

The aggregates shall consist of angular fragments of clean, hard, tough and durable rock of uniform quality throughout. They shall be obtained by crushing rock, gravel or river shingle and be free of elongated and flaky pieces, soft and disintegrated materials, vegetable and any other deleterious matter etc. They shall preferably be hydrophobic type. The aggregates shall satisfy the quality requirements set forth in Table-VIII except that the flakiness Index shall be limited to a maximum of 30.

c) Proportioning of Materials

The materials shall be proportioned as per the quantities given in Table-XI for 20mm thick open graded premix carpet.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 29 OF 36

Table - XI**Quantity of Materials Required For 10 Sq. M of Road Surface For 20mm Thick Open Graded Premix Carpet**Aggregates for Carpet

i)	Stone Chippings - 12mm size ; passing 20 mm sieve and retained on 10 mm sieve	0.18 Cu.m
ii)	Stone Chippings - 10 mm size; passing 12.5 mm sieve and retained on 6.3 mm sieve	0.09 Cu.m
Total		0.27 Cu.m

Binder for premixing (quantities in terms of straight run bitumen)

i)	For 0.18 Cu.m of 12 mm size stone Chippings at 52 Kg per Cu.m	9.5 Kg
ii)	For 0.09 Cu. M of 10mm size stone Chippings at 56 Kg per Cu.m	5.1 Kg
Total		14.6 Kg

3.11.03 Construction Operation**a) Weather and Seasonal Limitations**

Open graded premix carpet shall not be laid during rainy weather or when the base course is damp or wet or when the atmospheric temperature in shade is 16 Deg. C or below.

b) Preparation of Base

The underlying base on which the bituminous carpet is to be laid shall be prepared, shaped and conditioned to the specified lines, grade and cross section in accordance with the drawing, specification and as directed by the Engineer. The surface shall be well cleaned by removing caked earth and other foreign matters with wire brushes, sweeping with brooms and finally dusting with sacks as necessary.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 30 OF 36

c) Tack Coat

A tack coat complying with clause 3.09.00 shall be applied over the base preparatory to laying of the carpet. However application of tack coat shall not be necessary when the laying of carpet follows soon after laying the bituminous course.

d) Preparation of Premix

Mixers of approved type shall be employed for mixing the aggregates with the bituminous binder. The binder shall be heated to the temperature appropriate to the grade of bitumen approved by the Engineer in boilers of suitable design avoiding local overheating and ensuring a continuous supply. The aggregates shall be dry and suitably heated to a temperature as directed by the Engineer before these are placed in the mixer. After about 15 seconds of dry mixing, the heated binder shall be distributed over the aggregates at the rate specified. The mixing of binder with chipping shall be continued until the chippings are thoroughly coated with the binder. The mix shall be immediately transported from the mixer to the point of use in suitable vehicles or wheel barrows. The vehicles employed for transport shall be clean and be covered over in transit if so directed.

e) Spreading and Rolling

The premixed material shall be spread on the road surface with rakes to the required thickness and camber or distributed evenly with the help of a drag spreader without any undue loss of time. The camber shall be checked by means of camber boards and inequalities evened out. As soon as sufficient length of bituminous material are laid, rolling shall be commenced with 6 to 8 tonne power rollers preferably with smooth wheel tandem type or with any other approved plant. Rolling shall begin at the edges and progress toward the centre longitudinally except on the superelevated portions where it shall progress from the lower to upper edge parallel to the centre line of the pavement.

When the roller has passed over the whole area once, any high spots or depressions which become apparent shall be corrected by removing or adding premixed materials. Rolling shall then be continued until the entire surface has been rolled to compaction and all the roller marks have been eliminated. In each pass of the roller, preceding track shall be overlapped uniformly by at least 1/3 width. The roller wheels shall be kept damp to prevent the premix from adhering to the wheels and being picked up. In no case shall fuel/lubricating oil be used for this purpose. Rollers shall not stand on newly laid material as it may lead to undue deformations.

The edges along and transverse of the carpet laid and compacted earlier shall be cut to their full depth so as to expose fresh surface which shall be painted



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 31 OF 36

with a thin surface coat of approved binder before the new mix is placed against it.

f) Seal Coat

A seal coat conforming to clause 3.12.00 shall be applied to the surface immediately after laying the carpet. No traffic shall be allowed on the road till the seal coat has been placed.

3.12.00 Seal Coat

3.12.01 Description

This work shall consist of application of a seal coat as specified for sealing the voids in the bituminous surface laid to the specified levels, grade and camber.

Type-A : Liquid seal coat comprising of an application of a layer of bituminous binder followed by a cover of stone chippings.

Type-B : Premixed seal coat comprising of a thin application of fine aggregate premixed with bituminous binder.

3.12.02 Materials

a) Binder

The binder shall be bitumen of suitable grade as directed by the Engineer and conforming to the requirements of IS : 73, 217 or 454 as applicable or any other approved cutback.

The quantity of binder to be adopted in terms of straight run bitumen shall be 9.8 Kg and 6.8 Kg per 10 square metre area for Type-A and Type-B seal coat respectively.

b) Stone Chippings for Type A Seal Coat

The stone chippings shall consist of angular fragments of clean, hard, tough and durable rock of uniform quality throughout. They shall be free of elongated or flaky pieces, soft or disintegrated stone, vegetable or other deleterious matters etc. Stone chippings shall be of 6mm size defined as 100 percent passing through 10mm sieve and retained on 2.36mm sieve. The quantity used for spreading shall be 0.09 cu.m per 10 sq.m area. The chippings shall satisfy the quality requirements spelled out in Table- VIII except that the upper limit for flakiness Index shall be 30.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 32 OF 36

c) Fine Aggregate for Type B Seal Coat

The fine aggregate shall be sand or fine grit and shall consist of clean, hard, durable, uncoated dry particles and shall be free from dust, soft or flaky material, organic matter or other deleterious substances. The aggregate shall pass 1.7 mm sieve and be retained on 180 micron sieve. The quantity used for premixing shall be 0.06 cubic metre per 10 square metre area.

3.12.03

Construction Operations

a) Preparation of Base

The seal coat shall be applied immediately after laying the bituminous course which is required to be sealed. Before application of seal coat, the surface shall be cleaned free of any dust or other extraneous matters.

b) Construction of Type-A Seal Coat

The binder shall be heated in boilers of suitable design to the temperature appropriate to the grade of bitumen approved by the Engineer and sprayed on the dry surface in a uniform manner preferably with the help of mechanical sprayers. Excessive deposits of binder caused by stopping or starting of the sprayer or through leakage or due to any other reason shall be suitably corrected before the stone chippings are spread.

Immediately after the application of binder, stone chippings in a dry and clean state shall be spread uniformly on the surface preferably by means of a mechanical grittier or otherwise manually so as to cover the surface completely. If necessary the surface shall be broomed to ensure uniform spread of chippings. Immediately after the application of the cover material, the entire surface shall be rolled with a 8 - 10 tonne smooth wheeled roller. Rolling shall commence from the edges and progress towards the centre except in superelevated portions where it shall proceed from the inner edge to the outer. Each pass of the roller shall uniformly overlap not less than one third of the track made in the preceding pass. While rolling is in progress additional chippings shall be spread by hand in whatever quantities required to make up the irregularities. Rolling shall continue until all aggregate particles are firmly bedded in the binder and present an uniform closed surface.

c) Construction of Type-B Seal Coat

Mixers of approved type shall be employed for mixing the aggregates with the bituminous binder. The binder shall be heated in boilers of suitable design to the temperature appropriate to the grade of bitumen approved by the Engineer. Also the aggregates shall be dry and suitably heated to a temperature as directed by the Engineer before the same are placed in the mixer. Mixing of



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 33 OF 36

binder with aggregates to the specified proportions shall be continued till the latter is thoroughly coated with the former. The mix shall be immediately transported from the mixing plant to the point of use and spread uniformly on the bituminous surface to be sealed. As soon as sufficient length has been covered with the premixed material, the surface shall be rolled with 6 - 8 tonne smooth wheeled power rollers. Rolling shall be continued till the premixed material completely seals the voids in the bituminous course and a smooth uniform surface is obtained.

3.12.04 Opening to Traffic

In case of Type-B Seal coat, traffic may be allowed soon after the final rolling when the premixed materials are cooled down to the surrounding temperature. However in case of Type- A seal coat, the traffic shall not be permitted until the following day.

3.13.00 Repair of Existing Water Bound Macadam Surfaces

Pot holes or patches and ruts in the water bound macadam base or surface course which is to be surface treated shall be repaired by removing all loose materials by cutting in rectangular patches and replacing with suitable materials. The repair shall be done as under.

Pot holes, patches and ruts shall be drained of any water and cut to regular shape with vertical sides and then be filled either with i) coarse aggregates and screenings conforming to the specification for water bound macadam and compacted with rollers or other approved rammer etc or with ii) premixed material conforming to the specification for open graded premix carpet and compacted with rollers or other approved means after painting the sides and bottom of the holes with a thin application of bitumen or a combination of both as directed by the Engineer.

3.14.00 Road Side Drains

3.14.01 Drains

The road side drains shall be made in sizes and slopes as shown on the approved drawings. The sides and bottom shall be neatly dressed after excavation. Proper connections shall be made to the culverts outside the plant area as per the drawings and instructions of the Engineer.

The excavated spoils other than that required for backfilling shall be transported and filled in low areas within the plant area or in embankments as instructed by the Engineer. The lining for drains shall be as per the drawings. Lining of drains may be of bricks or cement concrete blocks of specified grade as shown on the approved drawing or as directed by the Engineer. If shown



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION - D16

REV.NO. 00 DATE 19/12/2019

SHEET 34 OF 36

on approved drawing, drains shall be of R.C.C. construction with necessary slopes.

3.15.00 Culverts

Excavation in trenches for foundation of culverts and wing walls shall be done with side slopes as per the drawings and instructions of the Engineer after clearing the site etc. As described in the "Specification for Earthwork in Excavation and Backfilling", backfilling in layers with watering and compaction shall be done after the construction of foundations. The construction of culverts shall be done true to the lines and levels as shown on the drawings. The specification for Masonry and/or Plain and Reinforced Cement concrete shall be followed as applicable.

3.16.00 Pipe Culverts and Drainage Pipes

3.16.01 Materials

The drainage pipes shall be made of R.C.C and shall be either class NP-2 or NP-3 as shown on the approved drawings. Pipe culverts shall be made of reinforced concrete pipe and shall be of class NP4 or RDSO class for railways as shown in the drawing. All pipes shall meet the requirements of IS : 458 and shall be procured from approved manufacturers with collars as per manufacturer's specification. The tenderer shall specifically mention the particular manufacturer's product he proposes to use.

Cement shall be ordinary Portland Cement as per IS:269. Coarse Aggregates shall be as per IS:383. Maximum size shall not exceed one third the thickness of the pipe or 20 mm whichever is smaller. Fine aggregates for concrete shall be as per IS:383.

3.16.02 Laying of Pipes

Laying of concrete pipes shall correspond to IS:783 and as per the specification given below.

a) The foundation bed for pipe shall be excavated true to lines and grades shown on the drawings and as directed by the Engineer. When trenching is involved, its width on either side of the pipe shall not be less than 150mm and not more than one third the diameter of pipe unless otherwise instructed/permitted by the Engineer. The sides of the trench shall be as nearly vertical as possible. Side slope, shoring, bailing out water etc as required shall be done by the Contractor.

Side slips if there be any shall be removed by the Contractor. After laying of the pipes are completed, backfilling of the trenches shall be done as per "Specification for Earthwork in Excavation and Backfilling" to the



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION - D16

REV.NO. 00 DATE 19/12/2019

SHEET 35 OF 36

satisfaction of the Engineer. The surplus spoils shall be transported and filled in low areas within the plant area as instructed by the Engineer.

When bedrock or boulder stratum is encountered during excavation, the excavation shall be taken down to at least 200mm below the bottom of the pipe with prior permission of the Engineer and all rock/boulders in the area shall be removed and space filled with approved earth free from stone or fragmented materials, shaped to the requirements and thoroughly compacted to provide adequate support for the pipe.

Filling of trench shall be carried out simultaneously on both sides of the pipe in such a manner that unequal pressures do not occur and shall be done as per the "Specification for Earthwork in Excavation and Backfilling". When two or more pipes are to be laid adjacent to each other, they shall be separated by a distance equal to at least half the diameter of the pipe subject to a minimum of 450 mm. Laying of pipes shall start from the outlet and proceed towards inlet. All pipes and fittings shall be gradually lowered into the trench or placed on the supports by approved means taking due care to avoid any damage. Under no circumstances the pipes shall be dropped into the trench or on supports from heights.

b) Pipe bedding shall be first class projection bedding for positive projecting pipes as per IS : 783 having a projection ratio not greater than 0.70. The pipe shall be carefully laid on bedding made up of fine granular materials in an earth foundation; the bedding shall be carefully shaped to fit the lower part of the pipe exterior for at least ten percent of its overall height and in which the fill material is thoroughly compacted in layers not exceeding 150mm in depth around the pipe for the remainder of the pipe laid in trench.

When indicated on the drawings or directed by the Engineer, the pipe shall be bedded on a cradle constructed of concrete having a mix not leaner than M-15. The shape and dimension of the cradle shall be as indicated on the drawing or as directed by the Engineer. The pipe shall be laid on the concrete bedding before the concrete is set.

c) The drop walls shall be made with first class brickwork in 1:4 cement mortar.

d) The pipe culverts shall be made with proper care with respect to the invert of the pipe, gradient if any etc as specified on the drawings and as instructed by the Engineer.

e) Where R.C.C pipes are encased in concrete at road crossings or at other places the pipes need be suitably supported avoiding reinforcements of concrete blocks, joints properly done before concreting is taken up. Concreting of total height of block may be done in a single operation or may be done upto some height for pipes to be properly laid in position and the balance height of the block shall be concreted subsequently.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROAD AND DRAINAGE**

SPECIFICATION NO. PE-TS-457-600-C016

VOLUME - II B

SECTION - D | SUB-SECTION – D16

REV.NO. 00 DATE 19/12/2019

SHEET 36 OF 36

f) The R.C.C. pipes shall be joined with cement mortar. Cement mortar shall consist of 1 part of cement and 2 part of clean sand with only enough water for workability. Procedure of jointing shall be as per IS : 783.

3.16.03 Relation With Water Supply Pipeline

Unless specifically cleared by the Engineer, under no circumstances shall the drainage pipes be allowed to come close to water supply pipelines.

3.17.00 Manholes and Inspection Chambers

The maximum distance between the manholes shall be 30m unless specifically permitted otherwise. In addition, at every change of alignment, gradient or diameter there shall be a manhole or inspection chamber. The distance between the manhole or inspection chamber and gully chamber shall not exceed 6 meters unless permitted otherwise. Manhole shall be constructed so as to be water tight under test. The channel or drain at the bottom of chamber shall be plastered with 1:2 cement sand mortar and finished smooth to the grade. The channels and drains shall be shaped and laid to provide a smooth flow. Connection to the existing pipelines shall be through a manhole. Manholes shall be provided with standard covers usually of C.I. or as directed by the Engineer. The cover shall be closely fitted so as to prevent gases from coming out.

4.00.00 Testing and Acceptance Criteria

All testing as mentioned in the specification and as mentioned in Clause No. 900 of the “Specification for Roads and Bridge Works, 1983” published by IRC on behalf of Ministry of Shipping and Transport (Roads Wing) shall be carried out by the Contractor as per the direction of the Engineer.

5.00.00 MEASUREMENT

Method of measurement shall be as per the latest version of IS:1200, Part-17 and as directed by the Engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D

SUBSECTION -D17

REV.NO. 0

DATE 19/12/2019

SHEET 1

OF

40

VOLUME: II B

**SECTION - D
(PART I)**

SUB-SECTION – D 17

SPECIFICATION NO. PE-TS-457-600-C017

FABRICATION OF STRUCTURAL STEEL WORK



**Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301**



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D

SUBSECTION -D17

REV.NO.

0

DATE

19/12/2019

SHEET

2

OF

40

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	GENERAL	3
3.00.00	WORKMANSHIP	19
4.00.00	INSPECTION, TESTING, ACCEPTANCE CRITERIA AND DELIVERY	29
5.00.00	INFORMATION TO BE SUBMITTED	33
6.00.00	RATES AND MEASUREMENTS	34



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D SUBSECTION -D17

REV.NO. 0 DATE 19/12/2019

SHEET 3 OF 40

SUB-SECTION – D XVII

FABRICATION OF STRUCTURAL STEEL WORK

1.00.00 SCOPE

This specification covers supply, fabrication, testing, painting and delivery to site of structural steelwork including supply of all consumable stores and rivets, bolts, nuts, washers, electrodes and other materials required for fabrication and field connections of all structural steelwork covered under the scope of the contract.

2.00.00 GENERAL

2.01.00 Work to be provided for by the Contractor

The work to be provided for by the Contractor, unless otherwise specified elsewhere in the contract, shall include, but not be limited to the following

- a) Preparation of complete detailed fabrication drawings and erection marking drawings required for all the structures covered under the scope of the contract based on the approved design drawings. As decided by the Engineer, some or all of these detailed drawings will have to be submitted for approval.
- b) To submit revised design with calculations and detailed fabrication drawings in case any substitution of the designed sections are to be made.
- c) To submit design calculations for joints and connections developed by the contractor along with detailed fabrication drawings.
- d) Furnish all materials, labour, tools and plant and all consumables required for fabrication and supply, all necessary rivets, bolts, nuts, washers, tie rods and welding electrodes for field connections,
- e) Furnish shop painting of all fabricated steelwork as per requirements of this Specification.
- f) Suitably mark, bundle, and pack for transport all fabricated materials.
- g) Prepare and furnish detailed Bill of Materials, Drawing Office Dispatch lists, Rivet and Bolt List and any other list of bought out items required in connection with the fabrication and erection of the structural steelwork.
- h) Insure, load and transport all fabricated steelwork field connection materials to site.
- i) Maintain a fully equipped workshop at site for fabrication, modification



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D SUBSECTION -D17

REV.NO. 0 DATE 19/12/2019

SHEET 4 OF 40

and repairs of steelwork at site as may be required to complete the works in accordance with the Contract.

2.02.00 Work by others

No work under this specification will be provided for by any agency other than the contractor, unless specifically mentioned otherwise elsewhere in the contract.

2.03.00 Codes and standards

All work under this specification shall, unless otherwise specified in the contract, conform to the requirements of the latest revision and/or replacements of the following or any other relevant Indian Standard specifications and codes of practice. In case any particular aspect of the work is not specifically covered by any Indian Standard specification, any other standard practice, as may be specified by the Engineer shall be followed:

- IS : 226 - Structural steel (Standard Quality)
- IS : 800 - Code of Practice for general construction in steel.
- IS : 806 - Code of practice for use of steel tubes in general building construction.
- IS : 808 - Rolled steel beams, channels, and angle sections
- IS : 813 - Scheme of symbols for welding
- IS : 814 - Covered electrodes for metal arc welding of structural steel
- IS : 815 - Classification and coding of covered electrodes for metal arc welding of structural steels.
- IS : 816 - Code of practice for use of metal arc welding for general construction in mild steel
- IS : 817 - Code of practice for training and testing metal arc welders
- IS : 818 - Code of practice for safety and health requirements in electric and gas welding and cutting operations
- IS : 822 - Code of practice for inspection of welds
- IS : 919 - Recommendations for limits and fits for Engineering
- IS : 961 - Structural Steel (High Tensile)

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	5	OF	40
IS : 1148 - Rivet bars for structural purposes IS : 1149 - High tensile rivet bars for structural purposes IS : 1161 - Steel Tubes for structural purposes IS : 1200 - Method of measurement of steelwork and ironwork (Part 8) IS : 1239 - Mild Steel Tubes IS : 1363 - Black hexagon bolts, nuts and lock nuts (dia. 6 to 30 mm) and black hexagon screws (dia 6 to 24 mm) IS : 1364 - Precision and semi-precision hexagon bolts, screws, nuts and 1 locknuts (dia, range 6 to 39 mm) IS : 1367 - Technical supply conditions for threaded fasteners IS : 1442 - Covered electrodes for the metal are welding of high tensile structural steel IS : 1608 - Method for tensile testing of steel products other than sheet strip, wire and tube IS : 1730 - Dimensions for steel plate, sheet, and strip for structural and general engineering purposes. IS : 1731 - Dimensions for steel flats for structural and general engineering purposes IS : 1852 - Rolling and cutting tolerances for hot-rolled steel products IS : 1977 - Structural steel (ordinary quality) St-42-0 IS : 2062 - Steel for General Structural Purposes IS : 2074 - Ready mixed paint, red oxide Zinc chromate priming IS : 2595 - Code of Practice for Radiographic Testing IS : 2629 - Recommended practice for Hot-Dip Galvanizing of Iron and Steel IS : 2633 - Method for testing uniformity of coating on Zinc Coated Articles IS : 3757 - High strength structural bolts					

	TITLE:	SPECIFICATION NO. PE-TS-457-600-C017			
	TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	6	OF	40
IS : 4759 - Specifications for Hot-Dip Zinc Coatings on Structural Steel and other allied products IS : 7205 - Safety Code for Erection of Structural Steelwork IS : 7215 - Tolerances for fabrication of steel structures IS : 7280 - Bare wire electrodes for submerged arc welding of structural steels. IS : 9595 - Recommendations for metal arc welding of carbon and carbon manganese steels.					
2.04.00 Conformity with Designs The contractor shall design all connections, supply and fabricate all steelwork and furnish all connection materials in accordance with the approved drawings and/or as instructed by the Engineer keeping in view the maximum Utilization of the available sizes and sections of steel materials. The methods of painting, marking, packing and delivery of all fabricated materials shall be in accordance with the provisions of the contract and/or as approved by the Engineer. Provision of all relevant Indian Standard Specifications and Codes of Practice shall be followed unless otherwise specified in the contract.					
2.05.00 Materials to be used					
2.05.01 General All steel materials required for the work will be supplied by the contractor unless otherwise specified elsewhere in the contract. The materials shall be free from all imperfections, mill scales, slag intrusions, laminations, fittings, rusts etc. that may impair their strength, durability, and appearance. All materials shall be of tested quality only unless otherwise permitted by the Engineer and/or Consultant. If desired by the Engineer, Test Certificates in respect of each consignment shall be submitted in triplicate. Whenever the materials are required to be used from unidentified stocks, if permitted by the Engineer, a random sample shall be tested at an approved laboratory from each lot of 50 tones or less of any particular section. The arc welding electrodes shall be of approved reputed manufacture and conforming to the relevant Indian Standard Codes of Practice and Specifications and shall be of heavily coated type and the thickness of the coating shall be uniform and concentric. With each container of electrodes, the manufacturer shall furnish instructions giving recommended voltage and amperage (Polarity in case of D.C. supply) for which the electrodes are suitable.					



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D

SUBSECTION -D17

REV.NO.

0

DATE

19/12/2019

SHEET

7

OF

40

2.05.02 Steel

All steel materials to be used in construction within the purview of this specification shall comply with any of the following Indian Standard Specifications as may be applicable:

- a) IS : 2062 - Steel for general structural purposes
- b) IS : 961 - Structural steel High Tensile
- c) IS : 1977 - Structural steel (Ordinary quality) St-42-0

In case of imported steel materials being used, these shall conform to specifications equivalent to any of the above as may be applicable.

2.05.03 Rivet Steel

All rivet steel used in construction within the purview of this Specification shall comply with one of the following Indian Standard Specifications as may be applicable:

- a) IS : 1148 - Rivet Bars for structural purpose
- b) IS : 1149 - High tensile rivet bars for structural purposes. Where high tensile steel is specified for rivets, steps shall be taken to ensure that the rivets are so manufactured that they can be driven and heads formed satisfactorily without the physical properties of steel being impaired.

2.05.04 Electrodes

All electrodes to be used under the Contract shall be of approved reputed manufacture, low hydrogen electrode and shall comply with any of the following Indian Standard Specifications as may be applicable

- a) IS : 814 - Covered electrodes for metal arc welding of structural steel
- b) IS : 815 - Classification and coding of covered electrodes for metal arc welding of mild steel and low alloy high tensile steel
- c) IS : 1442 - Covered electrodes for the metal arc welding of high tensile structural steel
- d) IS : 7280 - Bare wire electrodes for submerged arc welding of



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D

SUBSECTION -D17

REV.NO. 0

DATE 19/12/2019

SHEET 8

OF

40

structural steels

2.05.05 Bolts and Nuts

All bolts and nuts shall conform to the requirements of Indian Standard Specification IS: 1367 - Technical Supply Conditions for Threaded Fasteners.

Materials for Bolts and nuts under the purview of this contract shall comply with any of the following Indian Standard Specifications as may be applicable.

a) Mild Steel

All mild steel for bolts and nuts when tested in accordance with the following Indian Standard Specification shall have a tensile strength of not less than 44 Kg/mm² and a minimum elongation of 23 per cent on a gauge length of 5.6 $\frac{1}{A}$, where "A" is the cross sectional area of the test specimen

i) IS: 1367: Technical supply conditions for threaded fasteners

ii) IS: 1608: Method for tensile testing of steel products other than sheet, strip, wire and tube

b) High Tensile Steel

The material used for the manufacture of high tensile steel bolts and nuts shall have the mechanical properties appropriate to the particular class of steel as set out in IS: 1367 or as approved by the Engineer.

2.05.06 Washers

Washers shall be made of steel conforming to any of the following Indian Standard Specifications as may be applicable under the provisions of the Contract:

- a) IS : 2062 - Steel for general structural purposes
- b) IS : 961 - Structural Steel (High Tensile Quality)
- c) IS : 1977 - Structural steel (Ordinary Quality) St-42-0
- d) IS : 6649 - Hardened washers

2.05.07 Paints

Paints to be used for shop coat of fabricated steel under the purview of this

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	9	OF	40
		contract shall conform to the Indian Standard Specification IS: 2074 - Ready mixed Paint, Red oxide Zinc Chromate Priming.			
2.06.00	Coal Bin				
2.06.01	Shape of bins shall be circular, polygonal, square, or rectangular in plan. Bottom hopper portion may have be conical-cum-hyperbolic or any other profile shape as shown in the drawing. Bin shall be termed as bunkers or silos according to their shape and plane of rupture of coal.				
2.06.02	For general requirements, fabrication and construction details IS: 9178 (Pt.1 & 11) shall be followed as general guidance. The bins shall be fabricated and erected in segments.				
2.06.03	The Coal bins shall be made of mild steel plates joined together with full strength butt weld and provided with stiffeners at regular interval. Stiffeners shall be provided on the external face and it may be welded with external face.				
2.06.04	Bending of plates and rolled sections to the required shape for fabrication shall be done by plate bending machine or cold bending process Without resorting to heating, hammering, angle smithy and black smithy process.				
2.06.05	Poking hole (manual or pneumatic) and striking plate shall be provided to facilitate coal flow. Poking holes shall have circular MS pipe and cover cap as detailed in the drawing.				
2.07.00	New Erection Marks				
2.07.01	Additional structures involving new erection marks may be required to be added at any stage of work.				
2.07.02	All such new erection marks shall be detailed and included in marking schemes and fabrication carded out thereafter.				
2.07.03	All such new erection marks shall be considered under item of original fabrication work. As a result of additional structures becoming necessary if the work is delayed beyond the time schedule stipulated, the Engineer shall give suitable extension of time provided he is satisfied about the reasonableness of the delay involved. However, no claim for extra payments or revision of rates due to delay shall be entertained.				

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO. 0		DATE 19/12/2019	
		SHEET 10		OF 40	

2.08.00	ELECTRO FORGED STEEL GRATINGS
2.08.01	Factory made fabricated electro forged gratings unit with steel conforming to IS: 2062 shall be supplied, fabricated, transported, erected and aligned in floorings, platforms, drain and trench covers, walkways, passages, staircases with edge binding strips and anti skid nosing in treads etc.
2.08.02	All grating units shall be rectangular in pattern and electro forged. The size and the spacing of the bearing bars and cross bars shall be as detailed in fabrication drawings. The contractor shall submit the grating design for different spans and load intensities along with fabrication drawings. The depth of the grating unit shall be 40 mm, unless specified otherwise.
2.08.03	The gratings shall be made up in panel units designed to coincide with the span of the structural steel framing or openings as indicated in the design/scope drawings. Maximum possible standardization of the grating panel sizes shall be tried and designed.
2.08.04	The grating unit shall be accurately fabricated and finished, free from wraps, twists, or any defects that would impair their strength, serviceability, and appearance.
2.08.05	Grating work shall include cut outs and clearance opening for all columns, pipes, ducts, conduits or any other installation penetrating through the grating work. Such cut outs and clearances shall be treated as specified in subsequent clauses.
2.08.06	The gratings shall be notched, trimmed and neatly finished around flanges and webs of the columns, moment connections, cap plates, and such other components of the steel structures encountered during the placement of the gratings. In all such cases, the trimming shall be done to follow the profile of the components encountered. After trimming, the binding strip shall be provided on the grating to suit the profile so obtained.
2.08.07	Opening in gratings for pipes or ducts that are 150mm in size or diameter or larger shall be provided with steel bar toe plates of not less than 5mm thickness and appropriate width, set flush with the bottom of the bearing bars.
2.08.08	Penetrations in gratings that are more than 50mm but less than 150mm in size or diameter shall be welded with plates of size shown in the detailed drawings set flush with the bottom of the grating panel.
2.08.09	Unless otherwise indicated on the drawings, grating units at all penetrations shall be made up in split section, accurately fitted and neatly finished to provide for proper assembly and erection at the job site.

	TITLE:	SPECIFICATION NO. PE-TS-457-600-C017			
	TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	12	OF	40
	these defects noticed on visual or microscopic inspection shall render the material liable to rejection.				
2.09.05	There shall be no flaking or loosening when struck squarely with a chisel faced hammer. The galvanized steel member shall withstand minimum four one minute dips in copper sulphate solution as per IS: 2633.				
2.09.06	When the steel section is removed from the galvanizing kettle, excess spelter shall be removed by 'bumping'. The processes known as 'wiping' or 'scrapping' shall not be used for this purpose.				
2.09.07	Defects in certain members indicating presence of impurities in the galvanizing bath in quantities larger than that permitted by the specifications or lack of quality control in any manner in the galvanizing plant, shall render the entire, production in the relevant shift liable to rejection.				
2.09.08	All structural steel shall be treated with sodium dichromate or an approved equivalent solution after galvanizing; so as to prevent white storage stains.				
2.09.09	If the galvanizing of any member is damaged, the Engineer shall be shown of the extent of damage, if so directed the galvanizing may have to the redone in the similar manner as stated above at no extra cost to the Owner.				
2.10.00	STAINLESS STEEL HOPPERS (As per BOQ item)				
2.10.01	Material				
	In case SS Hopper is to be fabricated & erected as per BOQ item with SS415M, following specification shall be followed.				
	Stainless steel hopper of grade SS 415M as manufactured by SAIL or equivalent shall be provided in the lower portion of bunker hopper. SS 4 15M having the following chemical composition shall be used.				
	Material	%	Remarks		
	Carbon	10.03%	Max.		
	Silicon	1.60%	Max.		
	Manganese	0.80% to 1.50%			
	Phosphorous	0.03%	Max.		
	Sulpher	0.03%	Max.		
	Chromium	10.80% to 12.50%			

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK		SPECIFICATION NO. PE-TS-457-600-C017																		
			VOLUME - II B																		
			SECTION - D		SUBSECTION -D17																
			REV.NO.	0	DATE	19/12/2019															
			SHEET	13	OF	40															
<table><tr><td>Nickel</td><td>1.50%</td><td>Max.</td></tr><tr><td>Titanium</td><td>0.75%</td><td>Max.</td></tr><tr><td>Nitrogen</td><td>0.03%</td><td>Max.</td></tr></table>							Nickel	1.50%	Max.	Titanium	0.75%	Max.	Nitrogen	0.03%	Max.						
Nickel	1.50%	Max.																			
Titanium	0.75%	Max.																			
Nitrogen	0.03%	Max.																			
The mechanical properties shall be as follows:																					
<table><tr><td>Description</td><td>Value</td><td>Remarks</td></tr><tr><td>Hardness Rock Well B Scale</td><td>90</td><td>Max.</td></tr><tr><td>Tensile Strength</td><td>450 MPa</td><td>Min.</td></tr><tr><td>Yield Strength</td><td>300 MPa</td><td>Min.</td></tr><tr><td>Elongation</td><td>25%</td><td>Min.</td></tr></table>							Description	Value	Remarks	Hardness Rock Well B Scale	90	Max.	Tensile Strength	450 MPa	Min.	Yield Strength	300 MPa	Min.	Elongation	25%	Min.
Description	Value	Remarks																			
Hardness Rock Well B Scale	90	Max.																			
Tensile Strength	450 MPa	Min.																			
Yield Strength	300 MPa	Min.																			
Elongation	25%	Min.																			
2.10.02	Fabrication The fabrication, erection, alignment and welding shall be carried out as per the accepted practice and in accordance with relevant I.S. and international specification as well as stipulations contained herein. Fabrication drawings shall be prepared by the contractor on the basis of the design / scope drawings furnished by Engineer. The fabrication and erection works shall be done as per the approved fabrication drawings.																				
2.10.03	Fabrication Drawings a) Fabrication drawing shall give the cutting plan for each hopper plate. Such, cutting plan shall be based on the size of the Stainless Steel plate available at store. In order to reduce the wastage and ensure the maximum utilization of stainless steel plate, the cutting plan shall take in the consideration of the reverse curvature and place the various elements of hopper plate in opposite fashion to reduce the end wastage. Similarly the hopper plate element having different radii shall be placed one inside the other, to optimize the stainless steel plate use. Such optimization may also required adjustment in the size of the each element of hopper plate and also additional weld joints. b) The bill of material of hopper plate shall indicate the inner surface area of the hopper, weight of the hopper based on the inner surface area, weight of each of the cut plate of hopper fabrication, weight of cut and scrap pieces generated. Contractor shall return to the Owner’s store all unutilized (surplus) stainless steel plates and all waste and cut pieces generated. Non return of any part of the surplus/waste steel pieces to the Owner’s store will call for the penal recovery at three (03) times the maximum																				



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D SUBSECTION -D17

REV.NO. 0 DATE 19/12/2019

SHEET 14 OF 40

procurement rate for the weight of stainless steel pieces not returned to the store.

- c) In case the contractor does the cutting of the stainless steel without approved cutting plan then all the wastage (i.e. the difference between the weight of stainless steel plate cuts and the actual finished weight considered for the measurement for payment) shall be subjected to the penal recovery at the rate mentioned above.

2.10.04 Cuffing

Cutting may be affected by shearing, or by using plasma. The cut edges of all plates shall be perfectly straight and uniform through out. Cutting shall be done as per the cutting plan shown in the fabrication drawing. Should the Engineer find it necessary, the edges shall be ground smooth afterwards by contractor within the unit rates quoted by him. All the edge s shall be ground smooth before they are welded.

2.10.05 Jointing

Welding shall join stainless steel. All weld joints (along the inclined plane) shall be staggered. Any common welding process can weld stainless steel viz. MIG, metal arc or plasma using the covered compatible electrodes as per IS: 5206 or by inert gas arc welding as per IS: 2811. Shielding gas shall be Argon + Hydrogen mixture or Argon + Oxygen mixture. However, Argon + Oxygen mixture shall be preferred. Carbon-di-oxide mixture shall be avoided. 308L and 315L electrodes/fillers shall be used for the welding of Stainless Steel to Stainless Steel and Stainless Steel to Mild Steel respectively. However, the welding process and the type of the electrodes to be used for welding shall be as per welding procedure, as approved by the Engineer. On the basis of the welding procedure, the Contractor shall conduct qualification test.

2.10.06 Bending

The stainless steel plates shall be subjected to cold forming and bending in order to get the desired shape and profile.

2.10.07 Welding sequence

The type of electrodes, welding sequence, preheat and interpass temperature and post weld heat treatment shall be as approved by the Engineer.

2.10.08 Acceptance Criteria of Fabricated Structures

The acceptance of the fabricated structure work shall depend upon correct dimensions and alignment, absence of distortion in the structure, satisfactory results from the inspection and testing of the welded structure joints and the



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D SUBSECTION -D17

REV.NO. 0 DATE 19/12/2019

SHEET 15 OF 40

test specimens, general workmanship being good meeting the tolerance requirements given in IS: 7215.

2.11.00 BEARINGS

2.11.01 PTFE (Poly tetra fluorethylene) slide bearing

a) General

The bearings shall consist of upper and lower units. The upper unit shall include a sole plate with mirror finish stainless steel facing bonded to the bottom surface of the sole plate. The lower unit shall consist of a relevant laminated elastomers pad surfaced with PTFE. A rigid confining medium substructure bonds the PTFE to the pad. When the upper and lower units are mated the stainless steel slides on the PTFE surface with an extremely low coefficient of friction. These bearings shall be designed as per the performance requirements. The bearing shall be of reputed make and manufacturer as approved by Engineer, for required vertical loads, as per the construction drawings and for a maximum displacement of ± 50 mm.

b) Material

PTFE bearing shall be sliding against highly polished stainless steel and the coefficient of friction between them shall be less than 0.06 at 55 kg/cm². In order to prevent cold flow in the PTFE surface it shall be rigidly bonded by a special high temperature resistant adhesive to the stainless steel sub-strata. The stainless steel surface, which slides against the PTFE, is mirror polished. The stainless steel shall be bonded to the top plate by special high strength adhesive. The thickness of the stainless steel shall be between 1.0 to 1.5mm.

The resilient bearing pad shall consist of multiple layers of lightweight fabric impregnated with a high quality elastomer compound vulcanized into slabs of uniform standard thickness as per the requirement. This shall withstand vertical (compressive) load not less than 500 kg/cm² and shear loads upto 40 kg/cm².

c) Installation

The seating area for PTFE bearing shall be prepared accurately level and furnished with a thin layer of epoxy resin mortar. The bearing will be placed on this layer while it is still workable and the bearing is levelled. The bearing should not be displaced as the beam is lowered into position. When the mortar and adhesive are fully set and the beam slightly above the top of the bearing. The upper surface of the bearing shall then be coated with sufficient thickness of epoxy resin mortar so that when the beam is lowered on to the temporary supports it comes into full contact

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017	
		VOLUME - II B	
		SECTION - D	SUBSECTION -D17
		REV.NO. 0	DATE 19/12/2019
		SHEET 16	OF 40
		with the mortar and some is squeezed out. The surplus shall be troweled off and after the mortar is fully set the temporary supports removed.	
2.12.00	Storage of material		
2.12.01	General		
		All materials shall be so stored as to prevent deterioration and to ensure the preservation of their quality and fitness for the work. Any material, which has deteriorated or has been damaged, shall be removed from the contractor's yard immediately, failing which, the Engineer shall be at liberty to get the material removed and the cost incurred thereof shall be realised from the Contractor. The Contractor shall maintain upto date accounts in respect of receipt, use, and balance of all sizes and sections of steel and other materials. In case the fabrication is carried out in contractor's fabrication shop outside the plant site where other fabrication works are also carried out, all materials meant for use in this contract shall be stacked separately with easily identifiable marks.	
2.12.02	Steel		
		The steel to be used in fabrication and the resulting cut-pieces shall be stored in separate stacks off the ground section wise and lengthwise so that they can be easily inspected, measured, and accounted for at any time. If required by the Engineer, the materials may have to be stored under cover and suitably painted for protection against weather.	
2.12.03	Electrodes		
		The electrodes for electric arc welding shall be stored in properly designed racks, separating different types of electrodes in distinctly marked compartments. The electrodes shall be kept in a dry and warm condition if necessary by resorting to heating.	
2.12.04	Bolts, Nuts and Washers		
		Bolts, nuts and washers and other fastening materials shall be stored on racks off the ground with a coating of suitable protective oil. These shall be stored in separate gunny bags or compartments according to diameter, length, and quality.	
2.12.05	Paints		
		Paints shall be stored under cover in air tight containers. Paints supplied in sealed containers shall be used up as soon as possible once the container is opened.	

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017 VOLUME - II B SECTION - D SUBSECTION -D17 REV.NO. 0 DATE 19/12/2019 SHEET 17 OF 40
2.13.00	Quality Control The Contractor shall establish and maintain quality control procedures for different items of work and materials to the extent he deems necessary to ensure that all work is performed in accordance with this specification. In addition to the Contractor's quality control procedures, materials and workmanship at all times shall be subjected to inspection by the Engineer or Engineer's representative. As far as possible, all inspection by the Engineer or Engineer's representative shall be made at the Contractor's fabrication shop whether located at Site or elsewhere. The Contractor shall co-operate with the Engineer or Engineer's representative in permitting access for inspection to all places where work is being done and in providing free of cost all necessary help in respect of tools and plants, instrument, labour and materials required to carry out the inspection. The inspection shall be so scheduled as to provide the minimum interruption to the work of the Contractor. Materials or workmanship not in reasonable conformance with the provisions of this Specification may be rejected at any time during the progress of the work. The quality control procedure shall cover but not be limited to the following items of work a) Steel: Quality manufacturer's test certificates, test reports of representative samples of materials from unidentified stocks if permitted to be used. b) Rivets, Bolts, : Manufacturer's certificate, dimension checks, Nuts & Washers material testing. c) Electrodes : Manufacturer's certificate, thickness and quality of flux coating. d) Welders : Qualifying Tests e) Welding sets : Performance Tests f) Welds : Inspection, X-ray, Ultrasonic tests g) Paints : Manufacturer's certificate, physical inspection reports h) Galvanizing : Tests in accordance with IS 2633 - Method for testing uniformity of coating on Zinc Coated Articles and IS : 4759 - Specification for Hot-Dip Zinc coatings on Structural Steel and other allied products.	

	TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO. 0		DATE 19/12/2019	
		SHEET 18		OF 40	

2.14.00

Standard dimensions, forms and weights

The dimensions, forms, weights and tolerances of all rolled shapes rivets, bolts, nuts, studs, washers etc. and other members used in the fabrication of any structure shall, wherever applicable, conform to the requirements of the latest relevant Indian Standards, wherever they exist, or, in the absence of Indian Standards, to other equivalent standards.

2.15.00

Fabrication Drawings

The contractor shall within thirty (30) days after the award of the Contract submit to the Engineer the Schedule of Fabrication and erection of structural Steelworks, for approval. Within one week after receipt of approval on design of any steel structure (part or full) based on the approved design. As decided by the Engineer, six (6) copies each of some or all of the detailed fabrication drawings will have to be submitted for approval.

The sequence of preparation of fabrication drawings shall match with the approved fabrication and erection schedule. The above-mentioned approval for fabrication drawings will be accorded only towards the general conformity with the design requirements as well as specifications. The approval of drawing however shall not relieve the contractor of his sole responsibility in carrying out the work correctly and fulfilling the complete requirements of contract documents.

The fabrication drawings shall include but not limited to the following:

a)

Assembly drawings giving exact sizes of the sections to be used and identification marks of the various sections.

b)

Dimensional drawings of base plates, foundation bolts location etc.

c)

Comparison sheets to show that the proposed alternative section, if any, is as strong as the original sections shown on the Design Drawings.

d)

Complete Bill of Materials and detailed drawings of all sections as also their billing weights.

e)

Any other drawings or calculations that may be required for the clarification of the works or substituted parts thereof.

These drawings shall give all the necessary information for the fabrication, erection, and painting of the steelwork in accordance with the provisions of this Specification. Fabrication drawings shall be made in accordance with the best modern practice and with due regard to sequence, speed and economy in fabrication and erection. Fabrication drawings shall give complete information necessary for fabrication of the various components of the steelwork,



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D SUBSECTION -D17

REV.NO. 0 DATE 19/12/2019

SHEET 20 OF 40

To determine the effective size of members cut by gas, 3 mm shall be deducted from each cut edge. Gas cut edges, which will be subjected to substantial stress or which are to have weld metal deposited on them, shall be reasonably free from gouges, occasional notches or gouges not more than 4 mm deep will be permitted. Gouges greater than 4 mm that remain from cutting shall be removed by grinding. All re-entrant corners shall be shaped notch free to a radius of at least 12 mm. Shearing, cropping and gas cutting shall be clean, reasonably square and free from any distortion.

3.01.04 Planning of edges

Planning or finishing of sheared or cropped edges of plates or shapes or of edges gas-cut with a mechanically controlled torch shall not be required, unless specifically required by design and called for on the drawings, included in a stipulation for edge preparation for welding or as may be required after the inspection of the cut surface. Surface cut with hand-flame shall generally be ground, unless specifically instructed otherwise by the Engineer.

3.01.05 Clearances

The erection clearance for cleated ends of members connecting steel to steel shall preferably be not greater than 2 mm at each end. The erection clearance at ends of beams web shall be not more than 3 mm at each end, but where for practical reasons greater clearance is necessary, suitably designed cheatings shall be provided.

3.02.00 Riveted and bolted construction

3.02.01 Holes

Holes through more than one thickness of material for members, such as compound stanchions and girder flanges, shall be drilled after the members are assembled and tightly clamped or bolted together. Punching may be permitted before assembly, if the thickness of the material is not greater than the nominal diameter of rivet or bolt plus 3 mm subject to a maximum thickness of 16 mm provided that the holes are punched 3 mm less in diameter than the required size and reamed after assembly to the full diameter.

Holes for rivets or black bolts shall be not more than 1.5 mm or 2.0 mm (depending on whether the diameter of the rivet or bolt is less or more than or equal to 25 mm) larger in diameter than the nominal diameter of the rivet or black bolt passing through them.

Holes for turned and fitted bolts shall be drilled to a diameter equal to the nominal diameter of the shank or barrel subject to a tolerance grade of BS as specified in IS: 919. Parts to be connected shall be firmly held together by



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D SUBSECTION -D17

REV.NO. 0 DATE 19/12/2019

SHEET 21 OF 40

tacking welds or clamps and the holes drilled through all the thicknesses in one operation and subsequently reamed to size. Holes not drilled through all thickness in one operation shall be drilled to a smaller size and reamed out after assembly.

Holes for rivets or bolts shall not be formed by gas cutting process.

3.02.02

Assembly

All parts of riveted members shall be well pinned or bolted and rigidly held together while riveting. Drifting to enlarge unmatching holes shall not generally be permitted. In case drifting is permitted to a slight extent during assembly, it shall not distort the metal or enlarge the holes. Holes that must be enlarged to admit the rivets or bolts shall be reamed. Poor matching of holes shall be cause for rejection. The component parts shall be so assembled that they are neither twisted nor otherwise damaged, and shall be so prepared that the specified cambers, if any, are maintained.

Rivets shall ordinarily be hot driven, in which case their finished heads shall be approximately hemispherical in shape and shall be of uniform size throughout the work for rivets of the same size full, neatly finished and concentric with the holes. Rivets shall be heated uniformly to a temperature not exceeding 1 125°C they shall not be driven after their temperature has fallen below 540°C.

Rivets shall be driven by power riveters, of either compression or manually operated type, employing pneumatic, hydraulic or electric power. Hand driven rivets shall not be allowed unless in exceptional cases specifically approved by the Engineer. After driving, rivets shall be tight, shall completely fill the holes and their heads shall be in full contact with the surface. In case of countersunk rivets, the countersinking shall be fully filled by the rivet, any proudness of the countersunk head being dressed off flush, if required.

Riveted members shall have all parts firmly drawn and held together before and during riveting and special care shall be taken in this respect for all single riveted connections. For multiple riveted connections, a service bolt shall be provided in every third or fourth hole.

All loose, burnt, or otherwise defective rivets shall be cut out and replaced and special care shall be taken to inspect all single riveted connections. Special care shall also be taken in heating and driving long rivets. The Contractor shall prove the quality of riveting by cutting some rivets chosen at random by the Engineer. No extra payment will be made to the Contractor for such cutting and replacing. Riveting work, for any particular section or group, will be considered satisfactory when at least 90% of the corresponding cut rivets is found to be sound. If the ratio is below 75%, all the rivets in the particular section or group shall be cut, removed and replaced and tested again at the



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D SUBSECTION -D17

REV.NO. 0 DATE 19/12/2019

SHEET 23 OF 40

3.03.04 Welding Sequence

In assembling and joining parts of a structure or of built-up members, the procedure and sequence of welding shall be such as will avoid needless distortion and minimize shrinkage stresses in the closing welds of a rigid assembly, such closing welds shall be made in compression elements.

In the fabrication of cover-plated beams and built-up members, all shop splices in each component part shall be made before such component part is welded to other parts of the member. Long girders or girder sections may be made by shop splicing not more than three sub-sections, each made in accordance with this paragraph.

When required by the Engineer, welded assemblies shall be stress relieved by heat-treating in accordance with the provisions of the relevant Indian Standard or any other Standard approved by the Engineer.

3.03.05 Welding technique

All complete penetration groove welds made by manual welding, except when produced with the aid of backing material not more than 8 mm thick with root opening not less than one-half the thickness of the thinner part joined, shall have the root of the initial layer gouged out on the back side before welding is started from that side, and shall be so welded as to secure sound metal and complete fusion throughout the entire cross-section. Groove welds made with the use of the backing of the same material, as the base metal shall have the weld metal thoroughly fused with the backing material. Backing strips need not be removed. If required, they may be removed by gouging or gas cutting after welding is completed, provided no injury is done to the base metal and weld metal and the weld metal surface is left flush or slightly convex with full throat thickness.

Groove welds shall be terminated at the ends of a joint in a manner that will ensure their soundness. Where possible, this should be done by use of extension bars or run-off plates. Extension bars or run-off plates need not be removed upon completion of the weld unless otherwise specified elsewhere in the contract.

To get the best and consistent quality of welding, automatic submerged arc process shall be preferred. The technique of welding employed, the appearance and quality of welds made, and the methods of correcting defective work shall all conform to the relevant Indian Standards.

3.03.12 Temperature

No welding shall normally be done on parent material at a temperature below (-) 5°C. However, if welding is to undertaken at low temperature, adequate precautions as recommended in relevant Indian Standard shall be taken. When

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	24	OF	40

the parent material is less than 40 mm thick and the temperature is between (-) 5°C and 0°C, the surface around the joint to a distance of 100 mm or 4 times the thickness of the material, whichever is greater, shall be preheated till it is hand warm. When the parent material is more than 40 mm thick, the temperature of the area mentioned above shall be in no case be less than 20°C. All requirements regarding preheating of the parent material shall be in accordance with the relevant Indian Standard.

3.03. 13 Peening

Where required, intermediate layers of multiple-layer welds may be peened with light blows from a power hammer, using a round-nose tool, peening shall be done after the weld has cooled to a temperature warm to the hand. Care shall be exercised to prevent scaling or flaking of weld and base metal from over peening.

3.03. 14 Equipment

These shall be capable of producing proper current so that the operator may produce satisfactory welds. The welding machine shall be of a type and capacity as recommended by the manufacturers of electrodes or as may be approved by the engineer.

3.04.00 Finish

Column splices and butt joints of compression members depending on contact for stress transmission shall be accurately machined and close-butt over the whole section with a clearance not exceeding 0.1 mm locally at any place. In column caps and bases, the ends of shafts together with the attached gussets, angles, channels etc; after welding/riveting together, should be accurately machined so that the parts connected butt over the entire surfaces of contact. Care should be taken that those connecting angles of channels are fixed with such accuracy that they are not reduced in thickness by machining by more than 1.0 mm.

3.05.00 Slab bases and caps

Bases and caps fabricated out of steel slabs, except when cut material with true surface, shall be accurately machined over the bearing surface and shall be in effective contact with the end of the stanchion. A bearing face, which is to be grouted direct to a foundation, need not be machined if such face is true and parallel to the upper face.

To facilitate grouting, holes shall be provided, where necessary, in stanchion bases for the escape of air.

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	25	OF	40
3.12.00	Lacing bars The ends of lacing bars shall be neat and free from burns.				
3.13.00	Separators Rolled section or built-up steel separators or diaphragms shall be required for all double beams except where encased in concrete, in which case, pipe separators shall be used.				
3.14.00	Bearing Plates Provision shall be made for all necessary steel bearing plates to take up reaction of beams and columns and the required stiffeners and gussets whether or not specified in Drawings.				
3.15.00	Floor Grating All grating units shall be rectangular in pattern and of pressure locked assembly. The size and spacing of bearing bars and cross bars shall be as approved in detailed drawings. Alternatively diamond pattern grating if approved may be used. The grating shall be made in panel units designed to span as indicated in structural steel framing drawing or as directed by the Engineer. The grating units shall be finished free from warps, twists, or any other defects. Grating work shall include cutouts and clearance openings for all columns, pipes, ducts, conduits etc. The gratings shall be notched, trimmed, and neatly finished around components of the steel structures encountered. Binding strip shall be provided on the grating to suit the profile. Openings in gratings shall be provided with steel bar toe plates of not less than 5 mm thickness and 100 mm width. Unless otherwise indicated on drawings, all penetrations of grating units shall be made up in split section, accurately fitted, and neatly finished. Grating units shall be provided with all necessary clips, bolts, lock washers etc. for proper assembly and installation on supporting steel members. Maximum deviation in linear dimension shall not exceed 12 mm.				
3.10.00	Chequered Plates Minimum thickness of chequered plate floorings, covers etc. shall be 6 mm O/P. Chequered plate shall be accurately cut to the required sizes and shapes and the cut edges properly ground. Stiffeners shall be provided wherever required from design consideration.				

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	26	OF	40

3.11.00

Architectural Clearances

Bearing plates and stiffener connections shall not be permitted to encroach on the designed architectural clearances.

3.11.00

Shop connections

a) All shop connections shall be otherwise riveted or welded as specified on the Drawings.

b) Heads of rivets on surfaces carrying brick walls shall be flattened to 10 mm thick projection.

c) Certain connections, specified to be shop connections, may be changed to field connections if desired by the Engineer for convenience of erection and the contractor will have to make the desired changes at no extra cost to the exchequer.

3.13.00

Castings

Steel castings shall be annealed.

3.14.00

Shop erection

The steelwork shall be temporarily shop-erected complete or as directed by the Engineer so that accuracy of fit may be checked before dispatch. The parts shall be shop-erected with a sufficient number of parallel drifts to bring and keep the parts in place. In case of parts drilled or punched using steel jigs to make all similar parts interchangeable, the steelwork shall be shop erected in such a way as will facilitate the check of interchange ability.

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	27	OF	40

3.15.00	Shop painting
3.15.01	General
	Unless otherwise specified, steelwork, which will be concealed by interior building finish, need not be painted; steelwork to be encased in concrete shall not be painted. Unless specifically exempted, all other steelwork shall be given one coat of shop paint, applied thoroughly and evenly to dry surfaces which have been cleaned, in accordance with the following paragraph, by brush, spray, roller coating, flow-coating or dipping as may be approved by the Engineer. After inspection and approval and before leaving the shop, all steelwork specified to be painted shall be cleaned by hand-wire brushing or by other methods of loose mill scale, loose rust, weld slag or flux deposit, dirt and other foreign matter. Oil and grease deposits shall be removed by the solvent. Steelwork specified to have no shop paint shall, after fabrication, be cleaned of oil or grease by solvent cleaners and be cleaned of dirt and other foreign material by trough sweeping with a fibre brush.
3.15.02	Inaccessible parts
	Surfaces not in contact, but inaccessible after assembly, shall receive two coats of shop paint, Positively of different colours to prove application of two coats before assembly. This does not apply to the interior of sealed hollow sections.
3.15.03	Contact surfaces
	Contact surface shall be cleaned in accordance with sub-clause 3.13.1 before assembly.
3.15.04	Finished surfaces
	Machine finished surfaces shall be protected against corrosion by a rust inhibiting coating that can be easily removed prior to erection or which has characteristics that make removal unnecessary prior to erection.
3.15.05	Surfaces adjacent to field welds
	Unless otherwise provided for, surfaces within 50 of any field weld location shall be free of materials that would prevent proper welding or produce objectionable fumes while welding is being done.

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0		DATE 19/12/2019
		SHEET	28	OF	40
3.16.00	Galvanizing				
3.16.01	General				
	Structural steelwork for switchyard or other structures as may be specified in the contract shall be hot dip galvanized in accordance with the American Society for Testing and Materials Specification ASTM-A 123 or IS: 2629 - Recommended practice for Hot-Dip Galvanizing of Iron and steel. Where the steel structures are required to be galvanized the field connection materials like bolts, nuts and washers shall also be galvanized.				
3.16.02	Surface Preparation				
	All members to be galvanized shall be cleaned, by the process of pickling of rust, loose scale, oil, grease, slag and spatter of welded areas and other foreign substances prior to galvanizing. Pickling shall be carried out by immersing the steel in an acid bath containing either sulphuric or hydrochloric acid at a suitable concentration and temperature. The concentration of the acid and the temperature of the bath can be varied, provided that the pickling time is adjusted accordingly. The pickling process shall be completed by thoroughly rinsing with water, which should preferably be warm, so as to remove the residual acid.				
3.16.03	Procedure				
	Galvanizing shall be carried out by hot dip process in a proper and uniformly heated bath. It shall meet all the requirements when tested in accordance with IS: 2633 - Method for testing uniformity of coating on Zinc Coated Articles and IS: 4759 - Specification for Hot-dip zinc coatings on Structural Steel & other allied products. After finishing the threads of bolts, galvanizing shall be applied over the entire surface uniformly. The threads of bolts shall not be machined after galvanizing and shall not be clogged with zinc. The threads of nuts may be tapped after galvanizing but care shall be taken to use oil in the threads of nuts during erection. The surface preparation for galvanizing and the process of galvanizing itself, shall not adversely affect the mechanical properties of the materials to be galvanized. Where members are of such lengths as to prevent complete dipping in one operation, great care shall be taken to prevent warping. Materials on which galvanizing has been damaged shall be acid stripped and re-galvanized unless otherwise directed, but if any member becomes damaged after leaving been dipped twice, it shall be rejected. Special care shall be taken not to injure the skin on galvanized surfaces during transport, handling, and				

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO. 0		DATE 19/12/2019	
		SHEET 29		OF 40	
erection. Damages, if occur, shall be made good in accordance or as directed by the Engineer.					
4.00.00		INSPECTION, TESTING, ACCEPTANCE CRITERIA AND DELIVERY			
4.01.00		Inspection			
Unless specified otherwise, inspection to all, work shall be made by the or Engineer's representative at the place of manufacture prior to delivery. The Engineer or his representative shall have free access at all reasonable times to those parts of the manufacturer's works which are concerned with the fabrication of the steelwork under this Contract and he shall be afforded all reasonable facilities for satisfying himself that the fabrication is being done in accordance with the provisions of this Specification. The Contractor shall provide free of charge, such labour, materials, electricity, fuel, water, stores, tools and plant, apparatus and instruments as may be required by the Engineer to carry out inspection and/or tests in accordance with the Contract. The Contractor shall guarantee compliance with the provisions of this Specification.					
4.02.00		Testing and Acceptance Criteria			
4.02.01		General			
The Contractor shall carry out sampling and testing in accordance with the relevant Indian Standards and as supplemented herein for the following items at his own Cost. The Contractor shall get the specimens tested in a laboratory approved by the Engineer and submit to the Engineer the test results in triplicate within 3 (three) days after completion of the test.					
4.02.02		Steel			
All steel supplied by, the Contractor shall conform, to the relevant Indian Standards. Except otherwise mentioned in the contract, only tested quality steel having mill test reports shall be used. In case unidentified steel materials are permitted to be used by the Engineer, random samples of materials will be taken from each unidentified lot of 50 M.T or less of any particular section for tests to conform to relevant Indian Standards. Cost of all tests shall be born by the contractor. All material shall be free from all imperfections, mill scales, slag intrusions, laminations, fittings, rusts etc. that may impair their strength, durability, and appearance.					



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D

SUBSECTION -D17

REV.NO.

0

DATE

19/12/2019

SHEET

30

OF

40

4.02.02

Welding

- a) The weld surface shall be cleaned with steel wire brush to remove spatter metal, slag etc. and 100% of welds shall be inspected visually for size, length of weldment and external defects. Weld gauges shall be used for checking weld sizes. The surface shall be clean with regular beads and free from slags, cracks, blow-holes etc.
- b) Non-destructive examination shall be carried out to determine soundness of weldments as follows:
 - i) 10% at random on fillet-joints.
 - ii) 100% on all butt-joints.
- c) Should the ND tests indicate defects like improper root penetration, extensive blowholes, slag intrusion etc., such welds shall be back gauged, joints prepared again and rewelded. All defects shall be rectified by the Contractor at no extra costs.
- d) All electrodes shall be procured from approved reputed manufacturers with test certificates. The correct grade and size of electrode, which has not deteriorated in storage, shall be used. The inspection and testing of welding shall be performed in accordance with the provisions of the relevant Indian Standards or other equivalents. For every 50 tones of welded fabrication, the Engineer may ask for 1(one) test-destructive or non-destructive including X -ray, ultrasonic test or similar, the cost of which shall be borne by the Contractor.

4.02.04

Rivets, bolts, nuts and washers

All rivets, bolts, nuts, and washers shall be procured from M/s. Guest Keen William Ltd. or equivalent and shall confirm to the relevant Indian Standards. If desired by the Engineer, representative samples of these materials may have to be tested in an approved laboratory and in accordance with the procedures described in relevant Indian Standards. Cost of all such testing shall have to be borne by the Contractor. In addition to testing the rivets by hammer, 2% (two per cent) of the rivets done shall have to be cut off by chisels to ascertain the fit, quality of material and workmanship. The removal of the cut rivets and re-installing new rivets shall be done by the Contractor at his own cost.

4.02.05

Shop painting

All paints and primers shall be of standard quality and procured from approved manufacturers and shall conform to the provisions of the relevant Indian Standards.

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	31	OF	40

4.02. 12

Galvanizing

All galvanizing shall be uniform and of standard quality when tested in accordance with IS: 2633 - Method for testing uniformity of coating on Zinc Coated Articles and 15: 4759 - specification for Hot-Dip Zinc Coatings on Structural Steel & other allied products.

4.03.00

Tolerance

The tolerances on the dimensions of individual rolled steel components shall be as specified in IS: 1852 - specification for rolling and Cutting Tolerances for Hot-rolled Steel Products. The tolerances on straightness, length etc. of various fabricated components (such as beams and girders, columns, crane gantry girder etc.) of the steel structures shall be as specified in IS: 721 - Tolerances for Fabrication of Steel Structures.

4.04.00

Acceptance

Should any structure or part of a structure be found not to comply with any of the provisions of this specification, the same shall be liable to rejection. No Structure or part of the structure once rejected, shall be offered again for test, except in cases where the Engineer considers the defects rectifiable. The Engineer may, at his discretion, check some of the tests at an appropriate laboratory at the contractors cost.

When all tests to be performed in the Contractor’s shop under the terms of this contract have been successfully carried out, the steelwork will be accepted forthwith and the Engineer will issue acceptance certificate, upon receipt of which, the items will be shop painted, packed and dispatched. No item to be delivered unless an acceptance certificate for the same has been issued. The satisfactory completion of these tests or the issue of the certificates shall not bind the Owner to accept the work, should it, on further tests before or after erection, be found not in compliance with the Contract.

4.05.00

Delivery of materials

4.05.01

General

The Contractor will deliver the fabricated structural steel materials to site with all necessary field connection materials in such sequence as will permit the most efficient and economical performance of the erection work. The Owner may prescribe or control the sequence of delivery of materials, at his own discretion.

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	32	OF	40

4.05.02

Marking

Each separate piece of fabricated steelwork shall be distinctly marked on all surfaces before delivery in accordance with the markings shown on approved erection drawings and shall bear such other marks as will further facilitate identification and erection.

4.05.03

Shipping

Shipping shall be strictly in accordance with the sequence stipulated in the agreed Programme. Contractor shall dispatch the materials to the e worksite securely protecting and packing the materials to avoid loss or damage during transport by rail, road or water. All parts shall be adequately braced to prevent damage in transit.

Each bundle, bale or package delivered under this contract shall be marked on as many sides as possible and such distinct marking (all previous irrelevant markings being carefully obliterated) shall show the following:

a)

Name and address of the consignee

b)

Name and address of the consignor

c)

Gross weight of the package in tonnes and its dimensions

d)

Identification marks and/or number of the package

e)

Custom registration number, if required

All markings shall be carried out with such materials as would ensure quick drying and indelibility.

Each component or part or piece of material when shipped, shall be indelibly marked and/or tagged with reference to assembly drawings and corresponding piece numbers.

Each packing case shall contain in duplicate in English a packing list pasted on to the inside of the cover in a water-proof envelope, quoting especially -

a)

Name of the Contractor

b)

Number and date of the Contract

c)

Name of the office placing the contract

d)

Nomenclature of stores

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO. 0		DATE 19/12/2019	
		SHEET 33		OF 40	
e) A schedule of parts or pieces, giving the parts or piece number with reference to assembly drawings and the quantity of each. The shipping dimensions of each packing shall not exceed the maximum dimensions permissible for transport over the Indian Railways/Roads. After delivery of the materials at site, all packing materials shall automatically become the property of the Owner. Notwithstanding anything stated hereinbefore, any loss or damage resulting from inadequate packing shall be made good by the Contractor at no additional cost to the Owner. When facilities exist, all shipments shall be covered by approved Insurance Policy for transit at the cost of the Contractor. The contractor shall ship the complete materials or part on board a vessel belonging to an agency approved by the Owner or on rail and/or road transport as directed. The Contractor shall take all reasonable steps to ensure correct appraisal of freight rates, weights and volumes and in no case will the Owner be liable to pay any warehouse, wharfage, demurrage and other charges. If, however, the Owner has to make payment of any of the above-mentioned charges, the amount paid will be deducted from the bills of the Contractor. Necessary advise regarding the shipment with relevant details shall reach the Engineer at least a week in advance.					
5.00.00		INFORMATION TO BE SUBMITTED			
5.01.00		With Tender			
The following information is required to be submitted with the Tender: a) Progress Schedule The Contractor shall quote in his Tender a detailed schedule of progress of work and total time of completion, itemizing the time required for each of the following aspects of work. i) Preparation and approval of fabrication drawing ii) Procurement of Materials iii) Fabrication and shipping of all anchor bolts iv) Fabrication and shipping of main steelwork. v) Fabrication and shipping of steelwork for bunkers, tanks and/or silos					



TITLE:

**TECHNICAL SPECIFICATION FOR
FABRICATION OF STRUCTURAL
STEEL WORK**

SPECIFICATION NO. PE-TS-457-600-C017

VOLUME - II B

SECTION - D SUBSECTION -D17

REV.NO. 0 DATE 19/12/2019

SHEET 34 OF 40

as applicable.

vi) Fabrication and shipping of all other remaining steelwork including miscellaneous steelwork.

vii) Final date of completion of all shipments.

b) Shop

Location of the Tenderer's fabrication workshop giving details of equipment, manpower, the total capacity, and the capacity that will be available exclusively for this contract shall be submitted.

5.02.00

After Award

After award of the Contract the successful Tenderer is to submit the following:

- a) Complete fabrication drawings, material lists, cutting lists, rive and bolt lists, field welding schedules based on the approved design drawings prepared by him in accordance with the approved schedule.
- b) Monthly Progress Report with necessary photographs in six (6) copies to reach the Engineer on or before the 7th day o. each month, giving the up-to-date status of preparation of detailed shop drawings, bill of materials, procurement of materials, actual fabrication done, shipping and all other relevant information.
- c) Detailed monthly material reconciliation statements relevant to the Work done and reported in the Progress Report, giving the stock at hand of raw steel, work in progress, finished materials.
- d) Results of any test as and when conducted and as require by the engineer.
- e) Manufacturer's mill test report in respect of steel materials, rivets, bolts, nuts, and electrodes as may be applicable.

6.00.00

RATES AND MEASUREMENT

6.01.00

Rates

6.01.01

The items of work in the Schedule of items describe the work in brief. The various items of the Schedule of items shall be read in conjunction with these specifications including amendments and additions, general conditions of contract, special conditions of contracts, and other tender documents, if any. For each item of Schedule of Items, the bidder's rates shall include the activities covered in the description of the item as well as all necessary

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO. 0		DATE 19/12/2019	
		SHEET 35		OF 40	
operations described in the Specifications.					
6.01.02	The bidder's rates shall include cost of all minor details which are obviously and fairly intended and which may not have been included in the description in these documents but are essential for the satisfactory completion of the work. Rates shall also include for taking all safety measures.				
6.01.03	The bidder's -rates for all items of schedule of items shall include complete cost towards plant, equipment, erection and dismantling of scaffolding, men, materials and consumables, skilled and unskilled labour, levies, taxes, royalties, duties, transport, storage, repair/rectification/maintenance until handing over, contingencies, overhead and all incidental items not specifically mentioned but reasonably implied and necessary to complete the work.				
6.01.04	No claims shall be entertained, if the details shown on the 'Released for Construction' drawings differ from those shown on the bid/tender drawings.				
6.01.05	Rates shall be inclusive of all leads and lifts/elevation.				
6.01.06	The bidder's rates for Structural Steel shall include for fabrication and erection, transportation to site, preparation checking collecting and distributing of the fabrication drawings and design calculations, erection scheme, alignment, welding, including preheating and post heating, testing of welders, inspection of welds, visual inspection, non destructive and special testing, rectification and correction of defective welding works, production test plate, inspection and testing, erection scheme, protection against damage in transit, stability of structures, etc. The rates shall also be inclusive of providing and installing temporary structures, transport of Owner issue material from store, return of surplus/waste steel materials including cut pieces/waste steel, provision of additional butt/weld joint to reduce the wastage and all other general, special, such requirements as may be required, for the successful completion of the work.				
The rates for fabrication are inclusive of all tests on welds and material and no extra shall be payable for quality tests specified for fabrication of structure in shop or at site.					
Separate BOQ items for test on welds like radiography or Ultrasonic, DPT, magnetic particle tests are kept for tests on material/fabrication not covered under regular fabrication item of BOQ.					
6.01.07	The bidder's rates for foundation bolts assembly shall include fabrication, threading, heat treatment, erection, installation, and alignment of complete bolt assembly with nuts, locknuts, anchor plates, stiffener plates, protective tape, etc. This shall also include the cost of all materials not issued by the Owner. Material issued by Owner will be specified in GCC.				

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	36	OF	40
6.01.08	The bidders rates for application of inorganic primer shall include surface preparation to near white metal surface by blast cleaning, abrasives, touch up painting, suitable enclosure to avoid contamination and the necessary statutory approval from the factory inspector/pollution control board etc. regarding the method of blast cleaning and abrasives used, and getting approval of the specialized agency supplying the primer specified.				
6.01.09	The bidder's rates for application of finish painting system shall include surface preparation, application of intermediate (under) coat, finish coat and final finish coat, and getting approval of the specialized agency supplying the finish paint.				
6.01.10	The bidder's rates for electro-forged gratings (if specified) shall include supply, fabrication, transportation to the site, erection and alignment of factory made electro-forged gratings, all taxes, duties thereon etc. The rates shall also include preparation of grating design for different spans and load intensifies, preparation of design and fabrication drawings, edge preparation, blast cleaning followed by finish paint.				
6.01.11	The bidder's rates for galvanization of factory made electro-forged gratings (if specified) shall include the application of hot dipped galvanization as finish over the fabricated gratings and the treatment to be given for prevention of white storage stains, as per the technical Aspiration.				
6.01.12	The bidder's rates for permanent mild steel bolts, nuts and washers shall include the supply and fixing of such bolts, nuts and washers in position, for various types of Structural Steel works, as per the technical specification.				
6.01.13	The bidder's rates for high strength structural bolts, nuts and washers shall include the supply and fixing of such bolts, nuts and washers in position, for various types, of Structural Steel works, as per the technical specification.				
6.01.14	The bidder's rates for dismantling, additions to, alterations in and/or modifications shall be inclusive of all operations such as lowering of material, carriage etc., as mentioned in the technical specification. Unutilised steel pieces cut/removed shall be returned to the project stores free of charge. Non-return of unublized steel pieces to the Owner's store would be considered as wastage and recovery would be affected as per the provision of contract for structural steel consumption. This shall not include the weight of temporarily dismantled/supported members, connected member.				
	The bidder should prepare an optimised cutting plan as per fabrication drawing to utilise the steel material upto maximum extent and minimise the wastage/scrap. Quantity of wastage/scrap of material should be limited to the percentage mentioned elsewhere in the conditions of tender/ contract specifications.				

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO. 0		DATE 19/12/2019	
		SHEET 38		OF 40	
foundation bolt shall be calculated in the same way as that done for the item of fabrication, erection, alignment of structural steel. The weight of the nut / locknut shall be taken as per actual weight supplied by the contractor and accepted by the Engineer.					
6.02.02		The measurement for the item of fabrication, erection, alignment, welding, etc. of structural steel work shall be based on the approved weight of steel nearest to a Kg, by applying the unit weight as adopted at the time of issue of structural steel on the measurements worked out as given below.			
6.02.03		For ISMB, ISMC, ISA, flats, round bars, square bars and pipes, length shall be taken as per distance between planes normal to the axis of the member passing through the extreme points of the section.			
6.02.04		Gussets plates in trusses, and bracings, brackets plates, stiffeners, and skew cuts if any in plates for butt welds, the area shall be assumed as the minimum circumscribed rectangle. However deduction for any notch/skew cut shall be made as mentioned in clause no-6.02.06.			
6.02.05		For bunker wall plates, the minimum-circumscribing rectangle of the individual plate/pieces out of which these wall plates are assembled by butt-welding, shall be measured. Care shall be taken to ensure maximum utilization of cut-pieces generated by providing extra butt joints (for which no extra payment shall be made).			
6.02.06		For all other plates, where the area of any notch/skew cut in the plate is less than 0.05 sq.m. the area of the plate shall be assumed as that of the minimum circumscribing rectangle for the purpose of measurement and calculation of area for the purpose of payment. However, if the area of any notch/skew cuts in a plate is more than 0.05 sq.m, the area of notch/skew cut shall be deducted from assumed minimum circumscribing rectangular area for the purpose of payment.			
6.02.07		No deduction shall be made for the hole in the members, if the area of individual hole is less than 0.05 sq.m. The weight shall be calculated by deducting the area of holes, if area of individual hole is more than 0.05 sq.m.			
6.02.08		All cut-pieces and scrap generated due to cutting of holes, skew-cuts of plates, gussets, brackets, stiffeners, etc. shall be stacked separately and handed over to the project stores without being considered for material accounting as the circumscribing rectangle has been considered for payment.			
6.02.09		The splice plate shown in the fabrication drawing or approved by the Engineer shall only be measured for payment.			
6.02.10		The weight of permanent bolts, washers and nuts and welds shall not be included in the weights of the members. No extra payment shall be made for			

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO.	0	DATE	19/12/2019
		SHEET	39	OF	40

	welding/bolting.
6.02.11	The bolts and nuts required for erection purpose shall not be paid for and may be taken away by the Contractor after final welding for members. Erection boltholes left after removal of erection bolts shall be suitably plugged with welds.
6.02.12	The measurement for the item of application of inorganic primer including blast cleaning of steel surfaces shall be based on the weight on which the zinc silicate primer is applied, after blast cleaning in Metric Tonne, corrected to third place of decimal. The weight shall be the weight as approved, for erection mark/element of the mark painted, for payment of the item of fabrication and erection of structural steel works.
6.02.13	The measurement for the item of application of finish primer system shall be based on the weight on which the epoxy based finish primer is applied in Metric Tonne, corrected to third place of decimal. The weight shall be the weight as approved, for erection mark/element of the mark painted, for payment of the item of fabrication and erection of structural steel works.
6.02.14	The measurement for the item of gratings shall be based on the actual weight in Kgs, corrected to second place of decimal, as supplied by the Contractor, and accepted by the Engineer. Nothing extra shall be payable for making cutouts, notches, openings of any profile, trimming profiles etc. in the grating units.
6.02.15	The measurement for the item of hot dipped galvanization of gratings shall be based on the actual weight in Kgs, corrected to second place of decimal of gratings galvanized by the Contractor and accepted by the Engineer.
6.02.16	The measurement for the item of permanent bolts with nuts and washers shall be based on the actual weight in Kgs, corrected to second place of decimal, as supplied by the Contractor and accepted by the Engineer, and as per the approved bolts and nuts schedules.
6.02.17	The measurement for the item of High Strength Structural bolts with nuts and washers shall be based on the actual weight in Kgs, corrected to second place of decimal, as supplied by the Contractor and accepted by the Engineer, and as per the approved bolts and nuts schedules.
6.02.18	The measurement for the item of the work of dismantling, additions, alterations, reerection etc. shall be as given below
6.02.19	For dismantling, the unmodified weight of the actually dismantled erection marks shall only be measured.
6.02.20	For the work of addition to, alteration in and / or modification of 'erection

	TITLE: TECHNICAL SPECIFICATION FOR FABRICATION OF STRUCTURAL STEEL WORK	SPECIFICATION NO. PE-TS-457-600-C017			
		VOLUME - II B			
		SECTION - D		SUBSECTION -D17	
		REV.NO. 0		DATE 19/12/2019	
		SHEET 40		OF 40	
marks' either in erected position or in the fabrication yard, measurement of weight for payment purpose shall be calculated as the arithmetic sum of weight of steel cut and removed from the erection mark, weight of steel reutilised out of such cut and removed pieces and weight of additional new steel pieces added to the erection mark.					
6.02.21 For re-erection the weight of the modified erection mark shall only be measured.					
6.02.22 The weight shall be measured nearest to kg. and shall be arrived in a manner similar to the measurement for the item of fabrication, erection, alignment and welding of structural steel.					
6.02.23 The measurement for the item of PTFE bearings shall be based on the load carrying capacity of PTFE in MT, corrected to third place of decimal, supplied by the contractor and as accepted by the Engineer and as per the approved bearing schedule, for the total vertical load carrying capacity, for all bearings.					
6.02.24 The measurement for the item of stainless steel hopper shall be based on the actual finished weight of hopper weight in Kgs, corrected to second place of decimal. The hopper weight shall be arrived by multiplying of the inner surface area of the hopper with the unit weight of the hopper plate.					
6.02.25 The measurement for the item of flexible open-ended bellows straps of neoprene shall be based in running meter, corrected to second place of decimal. Bellow Straps shall be supplied as per the requirement of the approved drawings. The measurement shall be done for the inner circumference of the bunker on which neoprene has been fixed and for the length supplied by the Contractor 'and as accepted by the Engineer.					
6.02.26 The measurement for the item of Stainless Steel Hand Railing shall be based on finished weight of handrail in Kgs corrected to second place of decimal. The weight shall also include the weight of Stainless Steel fasteners, Stainless Steel beading, Stainless Steel cleats etc. The weight shall be the finished weight of Hand Rail, as accepted by the Engineer.					



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D

SUBSECTION – D18

REV.NO. 0

DATE 19/12/2019

SHEET 1

OF

17

VOLUME: II B

**SECTION - D
(PART I)**

SUB-SECTION – D 18

**SPECIFICATION NO. PE-TS-457-600-C018
ERECTION OF STRUCTURAL STEELWORK**



**Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301**



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 2 OF 17

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	GENERAL	3
3.00.00	WORKMANSHIP	6
4.00.00	TESTING AND ACCEPTANCE CRITERIA	12
5.00.00	INFORMATION TO BE SUBMITTED	16



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION – D18

REV.NO. 0 DATE 19/12/2019

SHEET 3 OF 17

SUB-SECTION – D 18

ERECTION OF STRUCTURAL STEELWORK

1.00.00 SCOPE

This specification covers the erection of structural steelwork including receiving and taking delivery of fabricated structural steel materials arriving at site, installing the same in position, painting and grouting the stanchion bases all complete as per Drawings, this Specification and other provision of the Contract.

2.00.00 GENERAL

2.01.00 Work to be provided for by the Contractor, unless otherwise specified in the Contract, shall include but not be limited to the following:

- a) The Contractor shall provide all construction and transport equipment, tools, tackle, consumables, materials, labour, and supervision required for erection of the structural steelwork.
- b) Receiving, unloading, checking, and moving to storage yard at Site including prompt attendance to all insurance matters as necessary for all fabricated steel materials arriving at Site. The Contractor shall pay all demurrage and/or wharfage charges etc. on account of default on his part.
- c) Transportation of all fabricated structural steel materials from Site storage yard, handling, rigging, assembling, riveting, bolting, welding and satisfactory installation of all fabricated structural steel materials in proper location according to approved erection drawings and/or as directed by the Engineer. If necessary suitable temporary approach roads to be built for transportation of fabricated steel structures.
- d) Checking center lines, levels of all foundation blocks including checking line, level, position and plumb of all bolts and pockets. Any defect observed in the foundation shall be rectified with Engineer's approval. The Contractor shall fully satisfy himself regarding the correctness of the foundations before installing the fabricated steel structures on the foundation blocks.
- e) Aligning, plumbing, leveling, riveting, bolting, welding and securely fixing the fabricated steel structures including floor gratings, chequered plates etc. in accordance with the Drawings or as directed by the Engineer.
- f) Painting of the erected steel structures.
- g) All minor modifications of the fabricated steel structures as directed by the



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 4 OF 17

Engineer including but not limited to the following:

- i) Removal of bends, kinks, twists etc. for parts damaged during transport and handling.
- ii) Cutting, chipping, filling, grinding, etc. if required for preparation and finishing of site connections.
- iii) Reaming of holes for use of higher size rivet or bolt if required.
- iv) Refabrication of parts damaged beyond repair during transport and handling or refabrication of parts, which are incorrectly fabricated.
- v) Fabrication of parts omitted during fabrication by error, or subsequently found necessary.
- vi) Drilling of holes which are either not drilled at all or are drilled in incorrect location during fabrication.
- vii) Carry out tests in accordance with this specification.

2.02.00 Work by Others

No work under this Specification will be provided for by any agency other than the Contractor unless specifically mentioned elsewhere in the contract.

2.03.00 Codes and Standards

All work under this Specification shall, unless specified otherwise, conform to the latest revisions and/or replacements of the following or any other Indian Standard Specification and codes of Practice of equivalent:

IS: 800 - Code of practice for general construction in steel.

IS: 456 - Code of practice for main or reinforced concrete.

2.04.00 Conformity with Designs

The Contractor will erect the entire fabricated steel structure, align all the members, complete all field connections and grout the foundations all as per the provisions of this specification and the sequence and the design criteria laid down by the Engineer. All work shall conform to the provisions of this specification and /or instructions of the engineer. The testing and acceptance of the erected structures shall be in accordance with the provisions of this Specifications and/or the instructions of the Engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 5 OF 17

2.05.00 Material

2.05.01 General

All fabricated steel structures and connection materials shall be supplied by the Contractor to the site. The Contractor shall take delivery from railway wagons or trucks at site, and unload the materials and perform all formalities like checking of materials and attend to insurance matters in accordance with Sub-Clause 2.01.00 and as specified hereinbefore.

2.05.02 Materials to conform to Indian standards

All materials required to be supplied by the Contractor under this contract shall conform to the relevant Indian Standard specifications.

2.06.00 Storage of Materials

2.06.01 General

All material shall be so stored as to prevent deterioration and to ensure the preservation of their quality and fitness for use in the works. Any material which has been deteriorated or damaged beyond repairs and has become unfit for use shall be removed immediately from the site, failing which, the engineer shall be at liberty to get the materials removed by agency and the cost incurred thereof shall be realised from the Contractor's dues.

2.06.02 Yard

The Contractor will have to establish a suitable yard in an approved location at site for storing the fabricated steel structures and other raw steel materials such as structural sections and plates as required. The yard shall have facilities like drainage, lighting, and suitable access for large cranes, trailers, and other heavy equipments. The yard shall be fenced all around with security arrangement and shall be of sufficiently large area to permit systematic storage of the fabricated steel structures without overcrowding and with suitable access for cranes, trailers and other equipment for use in erection work in proper sequence in accordance with the approved Programme of work.

The Tenderer must visit the site prior to submission of his tender to acquaint himself with the availability of land and the development necessary by way of filling, drainage, access roads, fences, sheds etc. all of which shall be carried out by the Contractor at his own cost as directed by the Engineer.

2.06.03 Covered Store

All field connection materials, paints, cement etc. shall be stored on well



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 6 OF 17

designed racks and platforms off the ground in a properly covered store building to be built at the cost of the Contractor.

2.07.00 Quality Control

The contractor shall establish and maintain quality control procedures for different items of work and materials as may be directed by the Engineer to assure compliance with the provisions of the Contract and shall submit the records of the same to the Engineer. The quality control operation shall include but not be limited to the Following items of work :

- i) Erection: Lines, levels, grades, plumbs, joint characteristics including tightness of bolts.
- ii) Grouting: Cleaning and roughness of foundation, quality of materials used for grouting, admixtures, consistency, and strength of grout.
- iii) Painting: Preparation of surface for painting, quality of primers and paints, thinners, application and uniformity of coats.

2.08.00 Taking Delivery

The Contractor shall take delivery of fabricated structural steel and necessary connection materials from railhead/trucks as may be necessary and as directed by the Engineer. He shall check, unload; transport the materials to his stores for proper storing at his own cost. The Contractor shall submit claims to insurance or other authorities and pursue the same in case of loss or damage during transit and handling and all loss thereof shall be borne by him.

The Contractor shall also take all precautions against damage of the materials in his custody after taking delivery and till the same are erected in place and accepted. The Contractor shall salvage, collect, and deliver all the packing materials to the Owner free of charge.

3.00.00 WORKMANSHIP

3.01.00 Erection

3.01.01 Plant and Equipment

The suitability and adequacy of all erection tools and plant and equipment proposed to be used shall be thoroughly verified. They shall be efficient, dependable, in good working condition and shall have the approval of the Engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 7 OF 17

3.01.02 Method and sequence of erection

The method and sequence of erection shall have the prior approval of the Engineer. The Contractor shall arrange for most economical method and sequence available to him consistent with the drawings and specifications and other relevant stipulations of the contract.

3.01.03 Temporary Bracing

Unless adequate bracing is included as a part of the permanent framing, the erector during erection shall install, free of cost to the Owner, temporary guys and bracings where needed to secure the framing against loads such as wind or seismic forces comparable in intensity to that for which the structure has been designed, acting upon exposed framing as well as loads due to erection equipment and erection operations.

If additional temporary guys are required to resist wind or seismic forces acting upon components of the finished structure installed by others during the course of the erection of the steel framing, arrangement for their installation by the erector shall be made free of cost to the Owner.

The requirement of temporary bracings and guys shall cease when the structural steel is once located, plumbed, levelled, aligned, and grouted within the tolerances permitted under the specification and guyed and braced to the satisfaction of the Engineer.

The temporary guys, braces, false work, and cribbing shall not be the property of the Owner and they may be removed immediately upon completion of the steel erection.

3.01.04 Temporary Floors for Buildings

It shall be the responsibility of the Contractor to provide free of cost planking and to cover such floors during the work in progress as may be required by any Act of Parliament and/or bylaws of state, Municipal or other local authorities.

3.01.05 Setting Out

Positioning and levelling of all steelwork, plumbing of stanchions and placing of every part of the structure with accuracy shall be in accordance with the approved Drawings and to the satisfaction of the Engineer. For heavy columns, etc. the Contractor shall set proper screed bars to maintain proper level. No extra payment shall be made for this.



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 8 OF 17

Each tier of column shall be plumbed and maintained in a true vertical position subject to the limits of tolerance under this Specification.

No permanent field connections by riveting, bolting or shall be carried out until proper alignment and plumbing has been attained.

3.01.06 Field Riveting

All rivets shall be heated and driven with pneumatic tools. Hand passing or "throwing" of rivets are desirable. Any other method of conveying hot rivets from the furnace to the driving point must be approved by the engineer. No-cold rivets shall be driven. All other requirements of riveting including quality and acceptance criteria shall be in accordance with the relevant portions of the Specification for Fabrication of Structural Steelwork of the Project.

3.01.07 Field Bolting

All relevant Portions in respect of bolted construction of the Specification for Fabrication of Structural Steelwork applicable to the Project shall also be applicable for field bolting in addition to the following:

Bolts shall be inserted in such a way so that they may remain in position under gravity even before fixing the nut. Bolted parts shall fit solidly together when assembled and shall not be separated by gaskets or any other interposed compressible materials. When assembled, all joint surfaces, including those adjacent to the washers shall be free of scales except tight mill scales. They shall be free of dirt, loose scales, burns, and other, defects that would prevent solid seating of the parts. Contact surfaces within friction type joints shall be free of oil, paint, lacquer, or galvanizing.

All high tensile bolts shall be tightened to provide, when all fasteners in the joint are tight, the required minimum bolt tension by any of the following methods.

a) Turn-of-nut Method

When the turn-of-nut method is used to provide the bolt tension, there shall first be enough bolts brought to a "snug tight" condition to ensure that the parts of the Joint are brought into good contact with each other. 'Snug tight' is defined as the tightness attained by a few impacts of an impact wrench or the full effort of a man using an ordinary spud wrench. Following this initial operation, bolts shall be placed in any remaining holes in the connection and brought to snug tightness. All bolts in the joint shall then be tightened additionally by the applicable amount of nut rotation specified in Table-I with tightening progressing systematically from the most rigid part of the joint to its free edges. During this operation



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 9 OF 17

there shall be no rotation of the part not turned by the wrench.

TABLE-I

Bolts length not exceeding 8 times dia or 200 mm	Bolt length exceeding 8 times dia or 200 mm	Remarks
1/2 turn	2/3 turn	Nut rotation is relative to bolt regardless of the element (nut or bolt) being turned. Tolerance on rotation-30° over or under.

Bolts may be installed without hardened washers when tightening is done by the turn -of-nut -method. However, normal washers shall be used.

Bolts tightened by the turn-of-nut method may have the outer face of the match-marked with the protruding bolt point before final tightening, thus affording the inspector visual means of noting the actual nut rotation. Such marks can be made by the wrench operator by suitable means after the bolts have been brought up snug tight.

b) Torque Wrench Tightening

When torque wrenches are used to provide the bolt tensions, the bolts shall be tightened to the torques specified in TABLE-II (See Note below the Table). Nuts shall be in tightening motion when torque is measured. When using torque wrenches to install several bolts in a single joint, the wrench shall be returned to touch up bolts previously tightened, which may have been loosened by the tightening of subsequent bolts, until all are tightened to the required tension.

TABLE-II

Nominal Bolt Diameter (mm) (Kg.M) of IS:1367	Torque to be applied for bolt class 8.8
20	59.94
22	81.63
24	103.73

Note: The above torque values are approximate for providing tensions of 14.



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 10 OF 17

7 T for 20 mm dia.; and 21.2 T for 24 mm dia. bolts under moderately lubricated condition. The torque wrench shall be calibrated at least once daily to find out the actual torque required to produce the above required tension in the bolt by placing it in a tension indicating device. These torques shall be applied for tightening the bolts on that day with the particular wrench.

In either of the above two methods, if required, for bolt entering and wrench operation clearances, tightening may be done by turning the bolt while the nut is prevented from rotating.

Impact wrenches if used shall be of adequate capacity and sufficiently supplied with air to perform the required tightening of each bolt in approximately ten seconds. Holes for turned bolts to be inserted in the field shall be reamed in the field. All drilling and reaming for turned bolts shall be done only after the parts to be connected are assembled. Tolerances applicable in the fit of the bolts shall be in accordance with relevant Indian Standard Specifications. All other requirements regarding assembly and bolt tightening shall be in accordance with this sub clause.

3.01.08 Field Welding

All field assembly and welding shall be carried out in accordance with the requirements of the specification for fabrication work applicable to the project, excepting such provisions therein which manifestly apply to shop conditions only. Where the fabricated structural steel members have been delivered painted, the paint shall be removed before field welding for a distance of at least 50 mm on either side of the joints.

3.01.09 Holes, Cutting and Fitting

No cutting of sections, flanges, webs, cleats, rivets, bolts, welds etc. shall be done unless specifically approved and /or instructed by the Engineer.

The erector shall not cut, drill, or otherwise alter the work of other trades, unless such work is clearly specified in the Contract or directed by the Engineer. Wherever such work is obtain specified the Contractor shall obtain complete information as to size, location and number of alterations prior to carrying out any work. The Contractor shall not be entitled for any payment on account of any such work.

3.02.00 Drifting

Correction of minor misfits and reasonable amount of reaming and cutting of excess stock from rivets will be considered as permissible. For this, light drifting may be used to draw holes together and drills shall be used to enlarge holes as necessary to make connections. Reaming, that weakens the member



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 11 OF 17

or makes it impossible to fill the holes properly or to adjust accurately after reaming, shall not be allowed.

Any error in shop work which prevents the proper assembling and fitting of parts by moderate use of drift pins and reamers shall immediately be called to the attention of the Engineer and approval of the method of correction obtained. The use of gas cutting torches at erection site is prohibited.

3.03.00 Grouting of stanchion bases and bearings of beams and girders on stone, brick or concrete (Plain or reinforced)

Grouting shall be carried out with Ordinary Cement grout as described below:

The mix shall be one (1) part cement and one (1) part sand and just enough water to make it workable. The positions to be grouted shall be cleaned thoroughly with compressed air jet and wetted with water and any accumulated water shall be removed. These shall be placed under expert supervision, taking care to avoid air locks. Edges shall be finished properly. If the thickness of grout is 25 mm or more, two (2) parts of 6 mm down graded stone chips may be added to the above noted cement-sand grout mix, if required, by the Engineer or shown on the drawings.

No grouting shall be carried out until a sufficient number of bottom lengths of stanchions have been properly lined, leveled, and plumbed and sufficient floor beams are tied in position.

Whatever method of grouting is employed, the operation shall not be carried out until the steelwork has been finally levelled and plumbed, the stanchion bases being supported meanwhile by steel wedges, and immediately before grouting, the space under steel shall be thoroughly cleaned.

If required by the Engineer, certain admixtures like aluminium powder, "ironite" or equivalent, may be required to be added to the grout to enhance certain desirable properties of the grout. Approved non-shrink pre-mixed grout having required flowability and compressive strength may also be used with Engineer's approval.

3.04.00 Painting after Erection

Field painting shall only be done after the structure is erected, levelled, plumbed, aligned and grouted in its final position, tested and accepted by the Engineer. Normally, final painting shall be done only after the floor slabs are concreted and masonry walls are built. However, touch up painting, making good any damaged shop painting and completing any unfinished portion of the shop coat shall be carried out by the Contractor free of cost to the Owner. The materials and specification for such painting in the field shall be in accordance with the requirements of the specification for fabrication of structural



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 12 OF 17

steelwork applicable for the project.

Painting shall not be done in frosty or foggy weather or when humidity is such as to cause condensation on the surfaces to be painted. Before painting of steel, which is delivered unpainted, is commenced, all surfaces to be painted shall be dried and thoroughly cleaned from all loose scale and rust.

All field rivets, bolts, welds, and abrasions to the shop coat shall be spot painted with the same paint used for the shop coat. Where specified, surfaces, which will be in contact after site assembling, shall receive a coat of paint (in addition to the shop coat, if any) and shall be brought together while the paint is still wet.

Surface, which will be inaccessible after field assembly shall receive the full, specified protective treatment before Bolts and fabricated steel members who are galvanized or otherwise treated and steel members to be encased shall not be painted.

The final painting shall be of tow coats of Synthetics Enamel painting or Aluminium paint of approved manufacture as per the approved "Schedule of Painting". The shades shall also be as per the approved schedule. Synthetic enamel paint shall conform to IS: 2932.

3.05.00 Final cleaning up

Upon completion of erection and before final acceptance of the work by the Engineer, the contractor shall remove free of cost all false work, rubbish and all Temporary Works resulting in connection with the performance of his work.

4.00.00 TESTING AND ACCEPTANCE CRITERIA

4.01.00 General

Loading tests shall be carried out on erected structures, if required by the Engineer, to check adequacy of fabrication and/or erection. Any structure or a part thereof found to be unsuitable for acceptance as a result of the test shall have to be dismantled and replaced with suitable member as per the Contract and no payment towards the cost of the dismantled portion and any connected work shall be made to the contractor. In course of dismantling, if any damage is done to any other parts of the structure or to any fixtures, the same shall be made good free of cost by the Contractor, to the satisfaction of the Engineer. The Cost of the tests specified hereinafter shall be borne by the Owner; but if the structure fails to pass the tests, the cost of the tests shall be recovered from the Contractor. Any extra claim due to loss of time, idle labour, etc. arising out of these testing operations shall not be entertained, however, only reasonable and appropriate time extensions will be allowed.



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 13 OF 17

The structure or structural member under consideration shall be loaded with its actual dead load for as long a time as possible before testing and the tests shall be conducted as indicated in the following sub-clauses 4.01.01, 4.01.02 and 4.01.03. The method of testing and application of loading shall be as approved by the Engineer.

4.01.01 Stiffness Test

In this test, the structure or member shall be subjected, addition to its actual dead load, to a test load equal to 1.5 times the specified superimposed load, and this loading shall be maintained for 24 hours. The maximum deflection attained during the test shall be within the permissible limit. If, after removal of the test load, the member or structure does not show a recovery of at least 80 per cent of the maximum strain or deflection shown during 24 hours under load, the test shall be repeated. The structure or member shall be considered to have sufficient stiffness, provided that the recovery after this second test is not less than 90 per cent of the maximum increase in strain or deflection recorded during the second test.

4.01.02 Strength Test

The structure or structural member under consideration shall be subjected, in addition to its actual dead load, to a test load equal to the sum of the dead load and twice the specified superimposed load, and this load shall be maintained for 24 hours.

In the case of wind load, a load corresponding to twice the specified wind load shall be applied and maintained for 24 hours, either with or without the vertical test load for more severe condition in the member under consideration or the structure as a whole. Complete tests under both conditions may be necessary to verify the strength of the structure. The structure shall be deemed to have adequate strength if, during the test, no part fails and if on the removal of the test load, the structure shows a recovery of at least 20 per cent of the maximum deflection or strain recorded during the 24 hours under load.

4.01.03 Structure of same design

Where several structures are built to the same design and it is considered unnecessary to test all of them, one structure, as a prototype, shall be fully tested, as described in previous Sub-clauses, but in addition, during the first application of the test load, particular note shall be taken of the strain or deflection when the test load 1.5 times the specified superimposed load has been maintained for 24 hours. This information is required as a basis of comparison in any check test carried out on samples of the structure.



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 14 OF 17

When a structure of the same type is selected for a check test, it shall be subjected, in addition to its actual dead load, to a superimposed test load, equal to 1.5 time the specified live load, in a manner and to an extent prescribed by the Engineer. This load shall be maintained for 24 hours, during which time, the maximum deflection shall be recorded. The check test shall be considered satisfactory, provided that the maximum strain or deflection recorded in the check test does not exceed by more than 20% of the maximum strain or deflection recorded at similar load in the test on the prototype.

4.01.04 Repair for subsequent test and use after strength tests

An actual structure which has passed the "Strength Test" as specified in Sub-clause 4.1.2 hereinbefore and is subsequently to be erected for use, shall be considered satisfactory for use after it has been strengthened by replacing any distorted members and has subsequently satisfied the 'Stiffness Test' as specified in Sub-clause 4.01.01 hereinbefore.

4.02.00 Tolerances

Some variation is to be expected in the finished dimensions of structural steel frames. Unless otherwise specified, such variations are deemed to be within the limits of good practice when they are not in excess of the cumulative effect of detailed erection clearances, fabricating tolerances for the finished parts and the rolling tolerances for the profile dimensions permitted under the Specifications for fabrication of structural steel work applicable to this Project and as specified below: The specified tolerance is mainly for welded erection. In case of bolted erection, no tolerance is desired so that all prefabricated bolt holes are matched on erection.

I. For Buildings Containing Cranes

Component	Description	Variation Allowed
1.	2.	3.
Main columns	a) shifting of column axis at foundation level with respect to building line	
	i) In longitudinal direction	i) ± 3.0 mm
	ii) In lateral direction	ii) ± 3.0 mm
	b) Deviation of both major column axis from vertical between foundation and	



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 15 OF 17

other member connection
levels:

i) For a column upto and including 10M height i) ± 3.5 mm from true vertical

ii) For a column greater than 10M but less than 40M height ii) ± 3.5 mm from true vertical for any 10 M length measured between connection levels, but not more than ± 7 mm per 30m length.

c) For adjacent pairs of columns across the width of the building prior to placing of truss ± 9.0 mm on true span.

d) For any individual column deviation of any bearing or resting level from levels shown on drawings. ± 3.0 mm

e) For adjacent pairs of columns either across the width of building or longitudinally level difference allowed between bearing or seating 3.0 mm

Trusses a) Deviation at centre of span of upper chord member from vertical plane running through least. centre of bottom chord. 1/1500 of the span or greater than 10mm whichever is the

Trusses b) Lateral displacement of top chord at center of span from vertical plane running through center of supports. 1/250 of depth of truss or 20 mm which ever is the - least.

Crane Cirders a) Difference in levels of crane rail measured between adjacent columns. 2.0 mm.

b) Deviation to crane rail-gauge ± 3.0 mm



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 16 OF 17

c) Relative shifting of ends of adjacent crane rail in plan and elevation after thermite welding. 1.0 mm.

d) Deviation of crane rail axis from centre line of web. ± 3.5 mm

Setting of
Expansion
gaps

At the time of setting of the expansion gaps, due regard shall be taken of the ambient temperature above or below 30°C. The coefficient of expansion or contraction shall be taken as 0.000012 per °C per unit length.

iv) For Building without Cranes

The maximum tolerances for line and level of the steel work shall be ± 3.0 mm on any part of the structure. The structure shall not be Out of Plumb more than 3.5 mm on each lox section of height and not more than 7.0 mm per 30 m section.

These tolerances shall apply to all parts of the structure unless the drawings issued for erection purposes state otherwise.

4.03.00 Acceptance

Structures and members have passed the tests and conform to all requirements specified in the foregoing Sub-clause 4.01.00, 4.01.01, 4.01.02, 4.01.03 and 4.01.04 and other applicable provisions of this specification and are within the limits of tolerances specified in Sub-clause 4.02.00 and/or otherwise approved by the Engineer shall be treated as approved and accepted for the purpose of fulfillment of the provisions of this contract.

5.00.00 INFORMATION TO BE SUBMITTED

5.01.00 Before Tender

5.01.01 Tentative Programme

The Tenderer shall submit a tentative programme based on the information available in the Tender Document and visit to site indicating the structure-wise erection schedule proposed to be maintained by the Contractor to complete the job in time in accordance with the Contract.



TITLE:

**TECHNICAL SPECIFICATION FOR
ERECTION OF STRUCTURAL
STEELWORK**

SPECIFICATION NO. PE-TS-457-600-C018

VOLUME - II B

SECTION - D SUBSECTION - D18

REV.NO. 0 DATE 19/12/2019

SHEET 17 OF 17

5.01.02

Constructional Plant and Equipment, Tools, Temporary works & manpower A detailed list Of all constructional plant and equipment like cranes, derricks, winches, welding sets, erection tools etc. along with their make, model, present condition and location available with the Tenderer which he will be able to employ on the job to maintain the progress of work in accordance with the Contract shall be submitted along with the Tender. The total number of each category of experienced personnel like fitters, welders, riggers etc. that he will be able to employ on the job shall also be indicated.

5.01.03

Erection Yard

A site plan showing the layout and location of the erection yard proposed to be established by the tenderer shall also be attached with the tender indicating the storage space for fabricated steel materials, site-fabrication and repair shop, covered stores, offices, locations of erection equipments and other facilities. The Engineer shall have the right to modify the arrangement and location of the proposed yard to suit site conditions and the Contractor shall comply with the same without any claim whatsoever.

5.02.00

After award of the Contract

After award of the contract, the Contractor shall submit the following:

5.02.01

Detailed Programme

The Contractor shall submit a detailed erection programme within a month of the award of the Contract for completion of the work in time in accordance with the Contract. This will show the target programme, with details of erection proposed to be carried out in each fortnight, details of major equipment required, and an assessment of required strength of various categories of workers in a proforma approved by the Engineer.

5.02.02

Fortnightly Progress Report

The Contractor shall submit fortnightly progress reports in triplicate to the Engineer showing along with necessary photographs, 125 mm x 90 mm size, and all details of actual achievements against the target programme specified in Sub-clause 5.02.01 above. Any shortfall in the achievement in a particular fortnight must be made up within the next fortnight. Along with this report, the Contractor shall also furnish details of fabricated materials in hand at site and the strength of his workers.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROOF DECKING**

SPECIFICATION NO. PE-TS-457-600-C019

VOLUME - II B

SECTION - D | SUB-SECTION – D19

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 7

VOLUME: II B

SECTION - D

SUB-SECTION – D19

ROOF DECKING

SPECIFICATION NO. PE-TS-457-600-C019



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION FOR
ROOF DECKING**

SPECIFICATION NO. PE-TS-457-600-C019

VOLUME - II B

SECTION - D | SUB-SECTION – D19

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 7

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	SCOPE	3
2.00.00	MATERIALS	3
3.00.00	INSTALLATION	3
4.00.00	ACCEPTANCE CRITERIA	6
5.00.00	IS CODES	6
6.00.00	RATES AND MEASUREMENTS	7



TITLE:

**TECHNICAL SPECIFICATION FOR
ROOF DECKING**

SPECIFICATION NO. PE-TS-457-600-C019

VOLUME - II B

SECTION - D | SUB-SECTION - D19

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 7

ROOF DECKING

1.00.00 Scope

This section of the specification covers the supply, fabrication and erection of profiled light gauge Metal Decks (coated and painted) as roof decking to the main plant building and any other area as indicated in the drawings.

2.00.00 Material

2.01.01 Roof of main plant TG and Deareator bay and bunker building consists of permanently colour coated (on exposed face) galvanized MS trough metal sheet decking plate of approved colour over roof purlins for cast-in-situ roof slab as per IS: 14246 and conform to class 3. Thickness of deck plate shall be minimum 0.8mm and minimum trough depth of 44 mm and centre to centre of the valley shall be 130mm with minimum yield strength of 250 Mpa. Silicon modified polyester paint shall be used for permanent coating over galvanized surface with minimum rate of galvanization 150 gm/sqm. DFT of permanent colour coating shall be 20 microns. It shall serve as permanent shuttering for cast-in-situ roof slab. It should have adequate strength to support weight of green concrete and imposed load during construction. The thickness of the deck plate shall however be designed suitably according to the spacing of roof purlins.

3.00.00 INSTALLATION

The Contractor shall furnish all labour, equipment and materials as required for the design, fabrication, coating, erection and fixing of the decking over purlins, painting and for the complete performance of the work in accordance with the construction drawings and as described herein.

The description, which follows, gives a general indication of the nature and extent of the work but is not necessarily exhaustive and does not purport to cover all the details/operations which will be necessary in order to carry out the work.

3.01.00 Detailed Design of Roof Decking

The Contractor, in conjunction with the manufacturer, shall be responsible for the detailing of the profiled decking, fittings and fixtures and shall submit with his tender particulars of the proposed manufacturer and of the particular product proposed for use. The detailing is to be based on typical details furnished by the Engineer. The Contractor shall submit to the Engineer, two copies of the general arrangement and detailed working drawings for the proposed design, together with all calculations necessary to verify the adequacy and completeness of the design & detailing of decking sheets,



TITLE:

**TECHNICAL SPECIFICATION FOR
ROOF DECKING**

SPECIFICATION NO. PE-TS-457-600-C019

VOLUME - II B

SECTION - D | SUB-SECTION – D19

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 7

fixtures, flashings and trims. After approval he shall supply further eight copies.

The Engineer will verify the correct interpretation of his requirements but may not necessarily check the design and details, and the Contractor shall be entirely responsible for the accuracy of the drawings and the correctness of the design and the suitability of the details. Manufacture of roof decking sheets shall not commence until the necessary approval of the Engineer has been obtained.

3.02.00 Erection & Fixing

3.02.01 Sequence of Manufacture/Erection

Cutting Schedules, delivery to site and stacking arrangements in store shall ensure that sheets are erected in a sequence which follows that for the manufacture. The decking sheets shall be erected using an arrangement of sheets and joints to conform with the requirements of this specification. Decking erection for each elevation or feature shall commence at one end only and proceed towards the other end, in order to ensure tight fitting laps.

3.02.02 Position and Location of Laps

Side and end laps of roof decking sheets shall be located and positioned in such a manner as to provide the maximum weather protection taking into account the direction of the prevailing wind.

The lines formed by horizontal laps and fixing shall where possible, be continuous and coincide with the edges of large openings in the roof.

3.02.03 Alignment of Sheets and Fixings

All roof decking sheets shall be fixed plumb and level with all fixings evenly spaced and accurately lined. All dirt and grease shall be removed from the surfaces of the sheets as the work proceeds.

3.02.04 Site Cutting

Approval must be obtained before the roof decking sheets are cut at site. Generally cutting of sheets to length will not be permitted, only special cutting and trimming for small openings shall allowed. Where possible, site cut edges shall be concealed at laps.

3.02.05 Damaged Sheets

Distorted, blemished or water stained sheets and any other fittings shall not be used.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROOF DECKING**

SPECIFICATION NO. PE-TS-457-600-C019

VOLUME - II B

SECTION - D | SUB-SECTION – D19

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 7

3.02.06**Laps**

End laps and side laps to roof decking sheets shall be sufficiently large to ensure that the decking complies with the weather tightness and other requirements of this specification. The length of each decking sheet shall be adjusted so that the end laps shall bear on the purlins. In no case end laps shall not be less than 150 mm and side laps shall not be less than 53 mm.

3.02.07**End Lap Fixings**

End lap fixings shall be located at least 25 mm from the end of each sheet.

3.02.08**Side Lap Fixings**

The spacing of side lap fixings shall ensure compliance with this specification regarding tightness. The spacing of these fixing screws shall not exceed 500mm. The fixing shall be located in the bottom flat of the corrugation.

3.02.09**Holes**

Holes in MS decking sheets shall be punched. In case holes are drilled holes, it is to be ensured that the holes do not go oversize due to the small thickness of the sheeting. All drilling swarf shall be removed from the surfaces of decking, supporting steel work, purlins etc.

3.02.10**Location and Spacing of Fixings**

Fixings shall be accurately located in position in the centre of the corrugations to ensure that the heads of bolts, nuts and washers bear squarely down on the surface of the sheeting and are not located at the edge or on the joints in supporting purlins.

3.02.11**Fixings**

The tenderer shall submit with his tender details of the proposed method for securing the roofing sheets to the metal purlins. The roof decking sheets are to be fixed to the roof purlins with hex washer head white zinc plated heat treated carbon steel self drilling / self tapping screws of minimum thread diameter of 5.6mm. These self drilling screws shall be drilled through the roofing sheets and purlins supporting the roofing sheets. These purlins shall be suitably spaced as per the requirement of roofing sheets and the roofing sheets shall not sag more than span/250 for the loads likely to be imposed during concreting and in future. The self-drilling screws are to be spaced at a maximum distance of 390mm centre to centre along the length of the purlins and top chord of truss. The screws are to be located preferably in the valley only and shall be installed in accordance with the manufacturer's



TITLE:

**TECHNICAL SPECIFICATION FOR
ROOF DECKING**

SPECIFICATION NO. PE-TS-457-600-C019

VOLUME - II B

SECTION - D | SUB-SECTION – D19

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 7

recommendations using tools approved by the manufacturer which do not damage the coating of the decking sheets.

3.03.00 Protection during Construction

Precautions shall be taken during the erection of the roof decking to ensure that partially erected decking are protected during inclement weather and damage at all times.

3.04.00 Damage

Any damage to coating & primer during transportation is to redone with the similar type of coating as per the manufacturer's specification at no extra cost to the Owner.

4.00.00 Acceptance Criteria

The installation shall present a neat appearance and shall be checked for water tightness. The following shall be checked :

- a) Side and end laps
- b) Absence of damage in the sheeting.
- c) Conformity of fixings with the approved design.

5.00.00 IS Codes

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

- IS : 513 - Specification for cold rolled carbon steel sheets.
- IS : 3618 - Specification for phosphate treatment of iron and steel for protection against corrosion.
- IS : 4431 - Specification for carbon & carbon manganese free cutting steel.
- IS : 1573 - Electroplated Coatings of zinc on iron and steel.



TITLE:

**TECHNICAL SPECIFICATION FOR
ROOF DECKING**

SPECIFICATION NO. PE-TS-457-600-C019

VOLUME - II B

SECTION - D | SUB-SECTION – D19

REV.NO. 00 DATE 19/12/2019

SHEET 7 OF 7

6.00.0 RATES AND MEASUREMENTS

6.01.00 Rates

Rates shall be unit rate for complete item described in the Schedule of Items and shall include all wastage.

6.02.00 Method of Measurement

Roofing shall be measured for net area of the work done. Profiled sheeting (coated & painted) shall be measured in plan area of sheets and not girthed. No deduction shall be made for openings measuring up to 0.1 sq.m. in area. No extra shall be paid for extra labour in cutting and for wastage etc. in making opening and cutting to size.

No payments shall be made for laps.



TITLE:

**TECHNICAL SPECIFICATION
FOR FALSE FLOORING**

SPECIFICATION NO. PE-TS-457-600-C020

VOLUME - II B

SECTION - D | SUB-SECTION – D20

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 6

VOLUME: II B

SECTION - D

SUB-SECTION – D20

FALSE FLOORING

SPECIFICATION NO. PE-TS-457-600-C020



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION
FOR FALSE FLOORING**

SPECIFICATION NO. PE-TS-457-600-C020

VOLUME - II B

SECTION - D | SUB-SECTION – D20

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 6

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	GENERAL	3
2.00.00	MATERIALS	3
3.00.00	INSTALLATION	4
4.00.00	ACCEPTANCE CRITERIA	5
5.00.00	IS CODES	6
6.00.00	RATES AND MEASUREMENTS	6



TITLE:

**TECHNICAL SPECIFICATION
FOR FALSE FLOORING**

SPECIFICATION NO. PE-TS-457-600-C020

VOLUME - II B

SECTION - D | SUB-SECTION – D20

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 6

FALSE FLOORING**1.00.00 General**

This section of the specification covers the supply, fabrication and installation of false flooring system having PVC top finish particle board, GI supporting system, painting etc. as per schedule of items in the main plant building and any other area as indicated in the drawings.

The scope of contractor covers supply of all materials, fabrication & installation works required to be carried out for completion of false flooring in the area specified in the drawings.

2.00.00 MATERIAL**2.01.00 Supporting structure**

Supporting pedestals shall be made of steel and will be of height as required. Supporting pedestal shall be truly vertical and located at distances to conform with size of floor panels and shall be equipped with locking devices to prevent disturbances of finished elevation. Base of pedestal shall have integral load dispersion plate of size 100x100x8mm to transmit the load evenly to the base floor. Adjustment of pedestal shall be provided by threaded vertical rod of 25mm diameter and elevating nut. The pedestal head shall provide positive interlocking of the steel grid channels supporting system and shall prevent lateral shifting.

The grid channels shall be made of galvanised steel of 40mm x 40mm x 3.15mm thick and shall be placed at 610mm centre to centre both ways to support floor panels in uniform levelled elevations. Nominal height of the false flooring system shall be 600 mm unless otherwise indicated. Pedestal head shall be equipped with conducting grounding pad if so desired by the Engineer

2.02.00 Floor Panels

The floor panels shall be made of fire resistant particle board, phenol formaldehyde bonded. Size of each panel shall be 610mm x 610mm with all panel edges finished to a tolerance of ± 0.2 mm. Floor panel shall have 2mm thick non-static PVC on top, 2mm thick hard PVC strip lipping on four edges and 26 G aluminium sheet fixed with araldite at bottom. Minimum thickness of the panel shall be 35mm, unless otherwise noted. All panels shall be completely interchangeable and easily removable with a suction lift tool. Panels shall be square within a tolerance of ± 0.25 mm on the diagonal. The floor panels shall be cut, wherever required for providing suitable outlets for cables and edges shall be lipped with hard PVC sheets.



TITLE:

**TECHNICAL SPECIFICATION
FOR FALSE FLOORING**

SPECIFICATION NO. PE-TS-457-600-C020

VOLUME - II B

SECTION - D | SUB-SECTION – D20

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 6

2.02.01 Strength

Each 610mm x 610 mm floor panel must be capable of withstanding the designed service load. The ultimate strength shall provide a safety factor of 3. The false flooring shall be capable of carrying a axial load of 800 kg and uniform load of 2000 kg/sq.m with maximum deflection of 1/350. If required by the Engineer, the samples shall be accepted only after carrying out load tests. The Engineer may relax the test requirements with concentrated load in case cabinets are not handled with castor fitting arrangement.

One additional pedestal shall be provided under floor stringer along front panel area of each control board for taking possible additional load that may occur from time to time.

2.02.02 Surface finish

All removable panels shall have the top surface finished with 2 mm thick flexible PVC flooring conforming to IS:3462 and shall be fixed to the surface with compatible high-creep resistant adhesive. The PVC floor tile shall be in single piece for each floor panel. Under side of panels shall also be painted with suitable epoxy or oil based paint.

2.02.03 Damaged Floor Panels

Distorted, blemished or stained floor panels shall not be used.

2.03.00 Skirting

Skirting shall be 150 mm high and 2 mm thick, completely matching with false flooring surface finish materials and shall be fixed to the wall surface as per manufacturer's installation instructions.

3.00.00 INSTALLATION

3.01.00 Base

The system shall be placed over a base of RCC floor slab and beams. Any grouting etc. that is necessary to fix the supporting structure shall be done.

The concrete sub floor shall be sealed with two coats of polyurethane paint to prevent moisture from coming in contact with cables and to minimise dust problem.

The floor panels and channels shall be completely interchangeable and remain in position without screwing or bolting under working/imposed loadings.

Any damage to the sub floor during installation of the false flooring system



TITLE:

**TECHNICAL SPECIFICATION
FOR FALSE FLOORING**

SPECIFICATION NO. PE-TS-457-600-C020

VOLUME - II B

SECTION - D | SUB-SECTION – D20

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 6

shall be made good by the contractor without any extra cost to the Owner. All steel surfaces are to be protected by two coats of polyurethane paint over a compatible primer and any damage to the paint during installation shall be made good. In case the loads exerted by the weight of machines are above the stated characteristics of floor finish material, the floor shall be protected by overlaying hard board during installation of machine or equipment.

All installation work of the false flooring system shall be supervised by the manufacturer's authorised representative.

3.03.00 Painting

After fixing the false flooring supporting system the sub floor shall be given a coat of polyurethane paint.

3.04.00 Protection during Construction

All precautions shall be taken during the erection of the false flooring to ensure that partially erected flooring are protected and shall not be damaged before handing over to owner.

3.05.00 Damage

Any damage of coating to supporting system caused during transportation is to be redone with the similar type of coating as per the manufacturer's specification at no extra cost to the Owner.

4.00.00 ACCEPTANCE CRITERIA

The false flooring system shall only be accepted after completion of following checks :

- a. Level
- b. Alignment of joints
- c. Thickness of joints
- d. Surface finish
- e. Colour and texture
- f. Details of edges, junctions etc.
- g. Performance
- h. Criteria specified for strength.



TITLE:

**TECHNICAL SPECIFICATION
FOR FALSE FLOORING**

SPECIFICATION NO. PE-TS-457-600-C020

VOLUME - II B

SECTION - D | SUB-SECTION – D20

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 6

5.00.00 IS CODES

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

IS:5318 Laying of flexible sheet and flooring.

IS:3462 Flexible PVC flooring

IS:3087 Wood particle boards (medium density) for general purposes.

6.00.0 RATES AND MEASUREMENTS

6.01.00 Rates

Rates shall be unit rate for complete item described in the Schedule of Items and shall include, but not limited to, supply & installation of floor panels, supporting systems, paintings etc.

6.02.00 Method of Measurement

False flooring shall be measured in Sq.M for net area of the work done. No deduction shall be made for openings measuring up to 0.4 sq.m. in area. No extra shall be paid for extra labour in cutting and for wastage etc. in making opening and cutting to size.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 26

VOLUME: II B

SECTION - D

SUB-SECTION – D21

BORED CAST-IN-SITU RCC PILES

SPECIFICATION NO. PE-TS-457-600-C021



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:
**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021
VOLUME - II B
SECTION - D | SUB-SECTION – D21
REV.NO. 00 DATE 19/12/2019
SHEET 2 OF 26

CONTENTS

CLAUSE NO.	DESCRIPTION	
1.00.00	SCOPE	3
2.00.00	GENERAL REQUIREMENTS	3
3.00.00	MATERIALS	5
4.00.00	PILE INSTALLATION	6
5.00.0	SAMPLING, TESTING, AND QUALITY ASSURANCE	12
6.00.00	PILE TESTING	15
7.00.00	CODES AND STANDARDS	16
8.00.00	RATES AND MEASUREMENT	17
	ANNEXURE-A	
	ANNEXURE-B	
	ANNEXURE-C	
	ANNEXURE-D	
	TABLE - 1	



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 26

**TECHNICAL SPECIFICATION FOR INSTALLATION OF BORED
CAST-IN-SITU PILES**

1.00.00 SCOPE

This specification covers the installation of bored cast-in-situ reinforced concrete vertical piles of specified load carrying capacity and diameter for various structures. This specification also covers carrying out initial and routine load tests on piles to assess their vertical, horizontal and pull out load carrying capacities.

2.00.00 GENERAL REQUIREMENTS

2.01.00 This specification along with specific requirements under Annexure-A covers the technical requirements for piling work.

2.02.00 The work shall include supplying and providing necessary materials, mobilization of all necessary equipments (Annexure-B), providing necessary engineering supervision through qualified and technical personnel, skilled and unskilled labour, etc. as required to carryout the complete piling work, and submission of records as per schedule.

2.03.00 The Contractor shall carryout all works as mentioned in Scope above. All works shall be executed to the satisfaction of the Engineer.

2.04.00 Pile capacities in vertical compression, horizontal, pullout loads for various pile diameters are given in Annexure-A.

2.05.00 The Contractor shall confirm and guarantee the "Safe Load" capacities by conducting both initial and working load test on piles as mentioned in the specific requirements.

2.06.00 The Contractor shall submit along with tender documents his tender design of piles based on soil data furnished by the Owner along with this specification. The ultimate load capacity of a pile may be estimated using suitable static formula and the minimum factor of safety shall be 2.5. However, safe load carrying capacity shall be conformed and guaranteed by conducting initial and routine load tests.

2.07.00 In case of initial or routine load test piles, if the Contractor fails to establish the safe load capacity as per his design, the Owner has the right to either derate the pile capacity on prorata basis or insist the Contractor to modify the pile design, to achieve the desired safe load capacity at no extra cost to the Owner.

2.08.00 Derating is acceptable up to 90 percent. In such case, additional piles shall be installed as per the design requirements.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 26

- 2.09.00 The Owner shall decide whether to derate or modify the design based on the design considerations such as providing additional piles in the designed pile cap, provision for extending the pile cap size, etc.
- 2.10.00 In case the Owner decides to modify the design instead of derating the pile, the contractor shall carry out the same and install separate test piles and test the same to guarantee the safe load at no extra cost to the Owner. However no extra shall be charged for the additional test piles as well as testing of these piles as per agreed contract conditions.
- 2.11.00 In case of working piles, if the pile does not meet the guaranteed capacity or rejected due to any other reason, the Contractor shall install extra piles at no extra cost to the Owner. Further, the extra cost, due to the increase in the pile cap size if any, on account of extra piles, shall be borne by the Contractor.
- 2.12.00 It is essential that all equipment and instruments are properly calibrated both at commencement and immediately after the completion of tests so that they represent true values. Certificates to this effect from an approved institution shall be furnished to the Engineer. If the Engineer so desires the Contractor shall arrange for having the instruments tested at an approved laboratory at no extra cost to the Owner and the test report shall be submitted to the Engineer. If the Engineer desires to witness such tests Contractor shall arrange to conduct the test in his presence.
- 2.13.00 The Contractor shall make his own arrangements for locating the coordinates and position of piles as per drawings supplied to him and for determining the Reduced Levels (RL) of these locations with respect to the benchmark indicated by the Engineer. Two established reference lines in mutually perpendicular direction shall be indicated to the Contractor. The Contractor shall provide at site all the required survey instruments to the satisfaction of the Engineer so that the work can be carried out accurately according to specifications and drawings.
- 2.14.00 The contractor shall assure the quality of piling work including cleaning of pile bore, quality of concrete, integrity of piles, etc.
- 2.15.00 **AVAILABLE SUB-SOIL DATA**
- An abstract of the sub soil data is furnished in the tender document. However, the detailed soil investigation report shall be made available for reference of the bidder, if so required, at the office of the Owner. The soil data furnished is in good faith and only for the guidance of the Bidder, to arrive at design parameters and construction methods.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 26

3.00.00 MATERIALS

3.01.00 General

All materials viz cement, steel, aggregates, water, etc. which are to be used for pile construction shall conform to relevant IS codes for properties, storage and handling of common building materials. However, aggregates more than 20 mm size shall not be used.

3.02.00 CONCRETE

Concrete shall be manufactured either by central batching plant or Ready Mix concrete. However, for initial test piles suitable method as approved by the Engineer may be used. Concrete shall conform to IS: 10262 & IS: 456.

3.02.01 Technical Specification for Cement Concrete (Plain and Reinforced) works along with IS: 2911 Part I/Sec 2 shall be followed for concrete works of piles. Use of plasticiser to control the water cement ratio shall be permitted on specific approval from the Engineer. Water cement ratio shall not be greater than 0.5.

3.02.02 Grade and minimum cement content
Minimum grade of concrete shall be as per Annexure-A conforming to IS: 456. Minimum cement content of 400 Kg/M³ of concrete shall be used for M-20 grade concrete.

3.02.03 Slump of concrete
The slump of concrete shall vary between 150 to 180 mm.

3.03.00 REINFORCEMENT

3.03.01 Longitudinal reinforcement in pile shall be high strength deformed steel bars conforming to IS: 1786 unless specified otherwise. Lateral reinforcement in pile shall be of mild steel conforming to IS: 432 Part-1 or HYSD bars as per IS: 1786.

3.03.02 The longitudinal reinforcement shall be provided considering the combination of vertical (compression and tension) and horizontal loads. However, the minimum longitudinal reinforcement shall be 0.4 percent of the sectional area calculated on the basis of nominal pile diameter. Minimum six numbers of bars shall be provided for longitudinal reinforcement. The diameter of longitudinal reinforcement bars shall not be less than 12mm. The stipulated minimum reinforcement shall be provided for the full length of pile.

3.03.03 The longitudinal reinforcement shall project 50 times its diameter above cut off level unless otherwise indicated.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 26

- 3.03.04 The laterals shall be tied to the longitudinal reinforcement to maintain its shape and spacing. The laterals may in the form of links or spirals. The minimum diameter of the links or spirals shall be 6 mm and the spacing of the links or spiral shall not be less than 150 mm and in no case more than 250 mm.
- 3.03.05 Reinforcement cage shall be sufficiently rigid to withstand handling and installation without any deformation and damage. As far as possible number of joints (laps) in longitudinal reinforcement shall be minimum. In case the reinforcement cage is made up of more than one segment, these shall preferably be assembled before lowering into casing tube/pilebore by providing necessary laps as per IS: 456.
- 3.03.06 The minimum clear distance between the two adjacent main reinforcement bars shall normally be 100 mm for the full depth of cage.
- 3.03.07 The laps in the reinforcement shall be such that the full strength of the bar is effective across the joint and the reinforcement cage is of sound construction.
- 3.03.08 Laps shall be staggered as far as practicable and not more than 50% bars shall be lapped at a 'particular section. Lap joints shall be staggered by at least 1.3 times the lapped length (Centre to Centre).
- 3.03.09 Proper cover and central placement of the reinforcement cage in the pile bore shall be ensured by use of suitable concrete spacers or rollers, cast specifically for the purpose.
- 3.03.10 Minimum clear cover to the longitudinal reinforcement shall be 50 mm, unless otherwise mentioned.
- 3.03.11 Bundling of bars is not permitted.
- 4.00.00 PILE INSTALLATION**
- Installation of piles shall be carried out as per pile layout drawings, installation criteria, and the direction of the Engineer.
- 4.01.00 Equipment and Accessories**
- 4.01.01 The equipment and accessories for installation of bored cast-in-situ piles shall be selected giving due consideration to the sub soil conditions, ground water conditions and the method of casting, etc. These shall be of standard type and shall have the approval of the Engineer.
- 4.01.02 List and details of equipment and accessories proposed to be used for the job shall be submitted along with the bid.

	TITLE:	SPECIFICATION NO. PE-TS-457-600-C021			
	TECHNICAL SPECIFICATION FOR BORED CAST-IN-SITU RCC PILES	VOLUME - II B			
		SECTION - D		SUB-SECTION – D21	
		REV.NO.	00	DATE	19/12/2019
		SHEET	7	OF	26
4.01.03	The capacity of the rig shall be adequate so as to reach the specified founding level.				
4.01.04	Provision shall be kept for chiselling within the pilebore, as specified elsewhere in this specification. Chiselling shall be carried out only with the approval of Engineer.				
4.02.00	Installation Criteria				
4.02.01	For determining the founding level of piles in soil as specified elsewhere, the Contractor shall have to perform Standard penetration test (SPT) as per IS: 2131 in a separate bore hole. The SPT shall be conducted at 1.0 m interval between the depths covering 5 metres each above and below the specified founding level. The bore shall be 100 mm diameter and method of boring shall conform to IS: 1892.				
4.02.02	For determining founding level of piles in rock, as specified elsewhere socketing horizon shall be established by the Contractor by collecting rock cores of NX size in a separate borehole, and testing the same for uniaxial compressive strength (UCS). Cores shall be collected by double tube core barrel attached with diamond bit. Coring shall be done upto a depth as indicated in the "specific requirements." Coring in rock shall conform to IS: 6926.				
4.02.03	In case it is not possible to test the cores so obtained for uniaxial compressive strength, cores shall be tested for point load strength index and correlated to obtain uniaxial compressive strength.				
4.02.04	Number of boreholes for carrying out SPT in soil or uniaxial compressive strength in rock, shall vary from one in 100 to 150 piles or pile group of 150 Sqm depending on the site condition and as decided by the Engineer. However, at the location of initial load test piles, one such borehole shall be done.				
4.02.05	A protocol between contractor and BHEL site shall be maintained regarding the strata at founding level. SPT value and UCS from the nearest borehole shall be indicated therein.				
4.02.06	The founding level of the pile shall be decided based on the criteria elaborated in the specific requirements under Annexure-A. Concreting shall not be done until the above conditions for founding level are satisfied.				
4.02.07	Approval of founding level by the Engineer shall in no way absolve the Contractor of his responsibility to guarantee the Safe load capacity of the piles as indicated in this document.				



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 8 OF 26

4.03.00 Control of position and alignment

4.03.01 Piles shall be installed as accurately vertical as possible. The permissible limits for deviation with respect to position and (inclination) alignment shall conform to IS: 2911 Part I/Sec. 2, which is reproduced below for ready reference.

- a) The maximum deviation of vertical piles shall not exceed 1.5 per cent in alignment.
- b) Piles shall not deviate more than 75 mm or D/4 whichever is less (75mm or D/10 whichever is more in case of piles having diameter more than 750mm) from their designed position at the working level.

4.04.00 Boring

4.04.01 Boring operations shall be done by rotary or percussion type drilling rigs using reverse mud circulation (RMC) method. Rotary hydraulic pulley shall be preferred.

4.04.02 The Contractor shall satisfy himself about the suitability of the method to be adopted for site. If DMC (direct mud circulation) or RMC is used Bentonite slurry shall be pumped through drill rods by means of high-pressure pumps. The cutting tool shall have suitable ports for the bentonite slurry to flow out at high pressure. If on mobilisation, the Contractor fails to make a proper bore for any reason, the Contractor has to switchover to other boring methods as approved by the Engineer at no extra cost to the Owner.

4.04.03 Working level shall be above the cut off level. After the initial boring of about 1.0m a temporary guide casing of suitable length shall be lowered in the pile bore. The diameter of guide casing shall be of such diameter, so as to give the necessary finished diameter of the concrete pile. The centre line of guide casing shall be checked before continuing further boring. Guide casing shall be minimum of 1.0m length. Additional length of casing may be used depending on the condition of the strata, ground water level etc.

4.04.04 Use of drilling mud (bentonite slurry) for stabilizing the sides of the pile bore is necessary wherever subsoil is likely to collapse in the pile bore. Drilling mud to be used shall meet the requirement as given in Annexure-C.

4.04.05 The bentonite slurry and the cuttings, which are carried to the surface by the rising flow of the slurry, shall pass through settling tanks of adequate size to remove the sand and spoils from the slurry before the slurry is recirculated to the boring. The bentonite slurry mixing and recirculation plant shall be suitably designed and installed.

	TITLE: TECHNICAL SPECIFICATION FOR BORED CAST-IN-SITU RCC PILES	SPECIFICATION NO. PE-TS-457-600-C021			
		VOLUME - II B			
		SECTION - D		SUB-SECTION – D21	
		REV.NO.	00	DATE	19/12/2019
		SHEET	9	OF	26
4.04.06	The bentonite slurry shall be maintained at 1.5m above the ground water level during boring operations and till the pile is concreted. When DMC or RMC method is used the bentonite slurry shall be under constant circulation till start of concreting.				
4.04.07	The size of cutting tools shall not be less than the diameter of the pile by more than 75mm. However, the pile bore shall be of the specified size.				
4.05.00	Chiselling				
4.05.01	Chiselling may be resorted to with the permission of the Engineer below the socketing horizon. The chiselling tool or bit shall be of adequate size and weight so as to reach the desired depth.				
4.06.00	Cleaning of Pile bore				
4.06.01	On completion of the pile bore upto the required depth, the bottom of the hole shall be cleaned very carefully before concreting work is taken up. Cleaning shall ensure that the pile bore is completely free from sludge/bored materials, debris of rock/boulder etc. Necessary checks shall be made as given in clause 5.0 to confirm the thorough cleaning of the pile bore.				
4.06.02	Pile bore shall be cleaned by fresh drilling mud through tremie pipe after placing reinforcement and just before start of concreting.				
4.06.03	Pile bore spoil along with used drilling mud shall be disposed off from site as directed by the Engineer.				
4.06.04	Pile bore bottom shall be thoroughly cleaned to make it free from sludge or any foreign matter before and after placing the reinforcement cage.				
4.07.00	Adjacent Structures				
4.07.01	When working near existing structures care shall be taken to avoid any damage to such structures.				
4.08.00	Concreting				
4.08.01	The Contractor shall carry out concrete mix design in accordance with IS: 10262 and submit mix design calculations and get them approved from the Engineer well in advance for installation of piles. Adequate number of tests on cubes, etc. shall be carried out as mentioned in clause 5.0 to ensure concrete of the minimum specified strength in accordance with IS: 456 at requisite workability (slump).				



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 10 OF 26

- 4.08.02 Concreting shall not be done until the Engineer is satisfied that the bearing strata (soil/rock) met with at the termination level of pile.
- 4.08.03 The time interval between the completion of boring and placing of concrete shall not exceed 6 hrs. In case the time interval exceeds 6 hrs the pilebore shall be abandoned. However, the Engineer may allow concreting provided the Contractor extends the pile bore by 0.5 m beyond the proposed depth, and clean the pilebore. The entire cost of all operation and materials for this extra length shall be borne by the Contractor.
- 4.08.04 Proper placement of the reinforcement cage to its full length shall be ensured before concreting.
- 4.08.05 Concreting shall be done by tremie method as specified by IS: 2911 (Part I /Sec.2). The level of drilling mud shall be maintained sufficiently above the ground water level.
- 4.08.06 The concreting operations shall not be taken up when the specific gravity of bottom slurry is more than 1.2 and sand content more than 7%. The drilling mud sample shall be collected from the bottom of pilebore as mentioned in clause 5.
- 4.08.07 Consistency of the drilling mud suspension shall be controlled throughout the concreting operations in order to keep the bore stabilized as well as to prevent concrete getting mixed up with the thicker suspension of the mud.
- 4.08.08 It shall be ensured that volume of concrete poured is at least equal to the theoretically computed volume of pile shaft being cast.
- 4.08.09 The temporary guide casing shall be withdrawn cautiously, after concreting is done upto the required level. While withdrawing the casing concrete shall not be disturbed.
- 4.09.00 Cut off level (COL)**
- 4.09.01 Cut off level of piles shall be as indicated in drawings released for construction or as indicated by the Engineer.
- 4.09.02 The top of concrete in pile shall be brought above the COL to remove all laitance and weak concrete and to ensure good concrete at COL for proper embedment in to pile cap.
- 4.09.03 When the pile cut off level is less than 1.0 metre below the working level, concrete shall be cast to the piling platform level to permit overflow of concrete for visual inspection. In case COL of pile is more than 1.0 metre below working level then concrete shall be cast to a minimum of one metre above COL.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 11 OF 26

4.10.00 Sequence of Piling

4.10.01 Each pile shall be identified with a reference number.

4.10.02 The convenience of installation may be taken into account while scheduling the sequence of piling in a group. This scheduling shall avoid piles being bored close to other recently constructed piles.

4.11.00 Building up of Piles

4.11.01 If any pile, already cast as per construction drawing, requires any extra casting due to any change in cut off level or the cast pile top level is less than the specified level or for any other reason, then the pile shall be built-up by using atleast one grade higher concrete than that used for concreting of the same pile, ensuring proper continuity with the existing concrete and to the satisfaction of the Engineer. Necessary reinforcement as per design requirement and suitable shuttering shall be provided before casting the concrete. Surrounding soil shall also be built up to the required level by proper compaction to ensure lateral capacity of the pile.

4.12.00 Breaking off of Piles

4.12.01 If any pile already cast, requires breaking due to lowering in cut off level or for any other reason, then the same shall be carried out, not before seven days of casting without affecting the quality of existing pile such as loosening, cracking etc. and to the satisfaction of the Engineer.

4.13.00 Preparation of Pile head

4.13.01 The soil surrounding the piles shall be excavated upto the bottom of the lean concrete below the pile cap, with provision for working space, sufficient enough to place shuttering, reinforcement, concreting and any other related operations.

4.13.02 The exposed part of concrete above the COL shall be removed/chipped off and made to a uniform level at COL, but not before seven days of casting of pile.

4.13.03 The projected reinforcement above COL shall be properly cleaned and bent to the required shape and level to be anchored into the pile cap.

4.13.04 The pile top shall be embedded into the pile cap by 50mm or clear cover to reinforcement, whichever is higher.

4.13.05 All loose material, like debris due to chipping/breaking of pile head to the desired level, shall be removed and disposed off as directed by the Engineer.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 12 OF 26

4.14.00 Rejection and Replacement of Defective Piles

4.14.01 The Engineer reserves the right to reject any pile which in his opinion is defective on account of load capacity, structural integrity, position, alignment, concrete quality etc. Piles that are defective shall be pulled out or left in place as judged convenient by the Engineer, without affecting the performance of adjacent piles. The Contractor shall install additional piles to substitute the defective piles as per the directions of the Engineer, at no extra cost to the Owner.

4.15.00 Recording of Piling Data

4.15.01 The Contractor shall record all the information during installation of piles. Typical data sheet for recording pile data shall be as shown in Appendix D of IS: 2911 Part I/Sec.2. The pile data shall also include all the details as in Annexure-D. On completion of each pile installation, pile record in triplicate shall be submitted to Engineer within two days of completion of concreting of the pile.

5.00.00 SAMPLING, TESTING AND QUALITY ASSURANCE

5.01.00 Facilities required for sampling and testing of materials, concrete, etc. in field and in laboratory should be provided by the Contractor. The Contractor shall carry out all sampling and testing in accordance with the relevant Indian Standards and this Specification. Where no specific testing procedure is mentioned the tests shall be carried out as per the prevalent accepted engineering practice and as per the directions of the Engineer. Tests shall be done in the presence of the Engineer or his authorized representative. In case the Engineer requires additional tests, the Contractor shall arrange to get these tests done and submit to the Engineer the test results in triplicate within three days after completion of any test.

5.02.00 The Contractor shall maintain records of all inspection and testing, which shall be made available to the Engineer. The Engineer at his discretion may waive some of the stipulations for small and unimportant concreting operations and other works.

5.03.00 Materials found unsuitable for acceptance shall be removed and replaced by the Contractor. The work done by this unsuitable material shall be redone as per specification requirements & and to the satisfaction of the Engineer at no extra cost to the Owner.

5.04.00 Quality Assurance Programme

- a) The Contractor shall submit and finalize a detailed Field Quality Assurance Programme within 30 days from the date of award of the contract, according to the requirements of this specification. This shall include setting up of a testing laboratory, arrangement of testing apparatus/equipment,



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 13 OF 26

deployment of qualified/experienced manpower, preparation of field quality plan, etc. On finalized field quality plan, the Owner shall identify, customer hold points, beyond which work shall not proceed without written approval from the Engineer. The testing apparatus/equipment installed in the field laboratory shall be calibrated/ corrected by the qualified persons as frequently as possible to give accurate testing results.

- b) Frequency of sampling and testing, etc. and Acceptance Criteria are given in Table - 1. The testing shall be done at field laboratory or any other laboratory approved by the Engineer. However, the testing frequencies set forth are the desirable minimum and the Engineer shall have the full authority to call for tests as frequently as he may deem necessary to satisfy himself that the materials and works comply with the appropriate specifications. The materials shall be tested to meet all the specified requirements before acceptance at manufacturers premises or at independent government approved laboratory. Tests indicated in the table are for cross checking at site the conformity of the materials to some of the specifications.

5.05.00 Testing of Concrete

5.05.01 Concrete and other materials shall be tested for quality, strength and other properties. Details of testing shall be as specified under technical specification for Cement concrete (Plain and Reinforced).

5.05.02 One sample consisting of six test cubes shall be made from the concrete used in each test pile, three to be tested after 7 days and three after 28 days.

5.05.03 For working piles, minimum one sample consisting of six test cubes shall be made from the concrete for the first ten piles, three to be tested after 7 days and three after 28 days. Thereafter, minimum one sample consisting of three test cubes for every 10 piles shall be tested for the 7-days & 28-days cube strength.

5.05.04 In preparation of test cubes or specimens vibrators shall not be used.

5.05.05 Concrete shall be tested for slump at every 1-hour interval during concreting of piles.

5.05.06 The frequency of sampling and testing of concrete and materials shall be done as per technical specification for cement concrete (Plain & Reinforced).

5.05.07 The acceptance criteria shall be as mentioned in Table-1.

5.06.00 Testing for position and alignment

5.06.01 Each pile shall be checked for its position with respect to specified location. Each pile bore shall be checked for its alignment.

5.06.02 Permissible limits for deviation shall be as specified under clause no. 4.03.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 14 OF 26

5.07.00 Properties of Drilling mud

5.07.01 Properties of drilling mud shall be checked as per requirement under Annexure C. Prior to the commencement of piling work and thereafter minimum once in a week or as found necessary by the Engineer, one sample consisting of 3 specimens shall be tested. Acceptance criteria applicable are as specified else where with 5% variation. This relaxation is not applicable for properties of drilling mud before concreting.

5.07.02 Density of the drilling mud shall be checked in each pile before concreting.

5.08.00 Check for Pile bore

5.08.01 On completion of boring and cleaning the bottom of each pilebore shall be checked from the sample collected from near the bottom of pile bore or by any other methods as approved by the Engineer, to ensure that it is free from pilebore spoil/debris and any other loose material, before concreting. Concreting shall be done only after the approval of the Engineer.

5.08.02 For sampling of drilling mud from the pilebore the following method or any other suitable method shall be adopted.

- a) A solid cone shall be lowered by a string to the bottom of pilebore. A sampler tube closed at top with a central hole (hollow cylinder) is lowered over the cone, and then a top cover shall be lowered over the cylinder. Care shall be taken for proper fittings of assembly to minimize the leakage while lifting the cone assembly to the ground surface. The slurry collected in the sampler tube shall be tested for density and sand content.
- b) Use of borehole camera for checking the pile bore spoil and strata is acceptable on approval of the Engineer.

5.09.00 Pile Integrity test

5.09.01 Low strain integrity test shall be conducted on 50% of the jobs piles and on all test piles or as directed by Engineer. The system shall have the computer readout facility and report on the findings of this shall be furnished to the Owner. This test shall be used to identify the job piles for routine load test.

Piles shall be trimmed to cut off level or sound concrete level. No pile cap blindage work should be undertaken prior to this test. The cast in-situ piles should not be tested before 14 days of casting.

5.09.02 The test shall be undertaken by persons trained and experienced and capable of interpreting the results with specific regard to piling. This test is limited to



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 15 OF 26

testing the integrity of the shaft and is not intended to replace the use of static load testing.

5.09.03

Low Strain Integrity Test Methodology:

- a) In this test, a low stress wave is set up in the pile shaft and is also known as Sonic Integrity or Sonic Echo test.
- b) A small metal/hard rubber hammer is used to produce a light blow on top of the pile. The shock wave travelling down the length of the pile is reflected back from the toe of the pile and recorded through a suitable transducer/ accelerometer in a computer for subsequent analysis.
- c) The primary shockwave, which travels down the length of the shaft, is reflected from the toe by the change in density between the concrete and sub strata. However, if the pile has any imperfections or discontinuities within its length these will set up secondary reflections, which will be added to the return signal.
- d) By analysis of the captured signal and knowledge of the conditions of the ground, age of concrete, etc. a picture of the locations of pile shaft defects can be built up. The observed signals are amplified into digital display as velocity versus length records providing information on structural integrity of piles.
- e) The stress wave velocity and approximate pile lengths are provided as input for the integrity testing. The stress wave velocity is dependent on the Young's Modulus and mass density of pile concrete.
- f) More than one recording of signals shall be done until repeatability of signals is achieved on the same pile.
- g) The tests shall be conducted at 3-6 locations to cover the entire cross section of the pile.

6.00.00

PILE TESTING

Pile load test shall be carried out as per IS:2911 Part-4 (latest edition) or as directed by Engineer.

6.01.00

INITIAL LOAD TEST

Initial load test shall be carried out on separately cast piles for confirmation of estimated pile capacities and to fix a more accurate driving criteria viz. set/bow, total number of blows and approximate depth etc. of founding level. At least 2 nos. of tests shall be conducted for each mode (vertical compression, pull out and lateral). The maximum test load shall be as



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 16 OF 26

mentioned in bill of quantities.

6.02.00 ROUTINE LOAD TEST

Routine load tests shall be carried out on job (working) piles for 0.5% of total no. of piles (for each mode and type). Maximum test load shall be 1.5 times the design safe load capacity. Piles showing unsatisfactory results as per load test results shall be treated as defective piles. Defective piles shall be removed or left in place and replaced by additional piles as directed by Engineer at no extra cost to the owner. Any additional cost towards design implications, if any, due to above shall be born by the contractor.

7.00.00 CODES AND STANDARDS

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) Codes, unless specified otherwise. In case any particular aspect of work is not specifically covered by Indian Standard Codes, any other standard practice, as may be specified by the Engineer, shall be followed.

IS: 432 (Part 1 & 11)	-	Specification for mild steel and medium tensile steel bars and hard drawn steel wire for concrete reinforcement.
IS: 456	-	Code of practice for plain and reinforced concrete.
IS: 1200 (Part 23)	-	Measurement of Building and Civil Engineering works Piling.
IS: 1786	-	Code of practice for twisted steel high strength deformed bars for concrete reinforcement.
IS: 1892	-	Code of practice for Subsurface Investigation for foundation.
IS: 2131	-	Method of Standard Penetration Test for Soils
IS: 2911 Part I/Sec 2	-	Code of practice for design and construction of pile foundations - Bored cast-in-situ concrete piles.
IS: 2911 Part IV	-	Code of practice for design and construction of pile foundation - Load test on piles.
IS: 6926	-	Code of practice for Diamond core Drilling for Site Investigation for River Valley Projects.
IS: 10262	-	Recommended guidelines for concrete mix design.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 17 OF 26

8.00.00 RATES AND MEASUREMENTS

The clauses below shall apply for item rate contracts only. They shall not be applicable to turnkey/lump sum Contracts.

8.01.00 Rates

8.01.01 The items of work in the schedule of items, describe the work in brief. The various items in schedule of items shall be read in conjunction with the corresponding sections in the Technical Specifications, including amendments, and additions, if any. For each item in schedule of items, the unit rate shall include for the activities covered in the description of the item as well as for all necessary operations described in the specification and specific requirements.

8.01.02 The unit rates shall include for minor details which are obviously and fairly intended, and which may not have been included in the description in these documents, but are essential for the satisfactory completion of the work. Unit rates shall also include for all safety measures as required by codal provisions, local regulations, acts, bye-laws, etc. and for execution of work to the satisfaction of the Engineer.

8.01.03 The quoted rate for each item shall be inclusive of mobilization of all plant, equipment, scaffolding, labour, materials, skilled and unskilled labour, and demobilization after completion of work, supervision, establishing the level and coordinates at each work.

8.01.04 The quoted rate for piling for a particular diameter and capacity of pile shall remain valid for the actual lengths provided /to be provided irrespective of the minimum length specified elsewhere in this specification.

8.01.05 The quoted rate for piling as per description of item works shall be inclusive of providing all plant equipment, labour, materials, skilled and unskilled labour, making observations, establishing the ground level and coordinates at each location of pile by carrying levels from one established bench mark and distances from one set of grid lines furnished by the owner.

8.01.06 The quoted rate for piling shall be inclusive of bailing out all the pile bore spoil from the pilebore, keeping the borehole free from bored material/debris etc. and disposing the bored/chiselled material along with the drilling mud upto 2 Km. beyond plant boundary or as directed by Engineer, flushing the pile bore by fresh bentonite before concreting, collection of samples from bottom of pilebore, transporting to laboratory, testing and reporting of results.

8.01.07 The quoted rate for piling shall include shifting of plant and equipment from one pile location to another pile locations, providing temporary casing pipe and removal of the same after completing, concreting, supply of necessary materials,



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 18 OF 26

equipment and manpower, cost of boring by approved method as specified, circulation of bentonite slurry and cleaning of borehole free from sludge, as specified, etc.

8.01.08 The quoted rate for piling shall also include chiselling, if any, required for socketing the pile in rock.

8.01.09 The quoted rate for the piling shall include concreting by termite method, length of pile above COL, withdrawal of guide casing, cost for preparation of pile head and disposal of debris etc., resulting from breaking off of pile upto COL, upto a distance of 2 Km from the plant boundary or as directed by Engineer.

8.01.10 The quoted rate for piling shall also include providing reinforcement and its cleaning, straightening, cutting, bending, binding with annealed wire, welding, tackwelding, providing concrete cover blocks, spacers, placing the reinforcement cage in pile casing/bore and other cost of tools and plants, materials, labours, carting the steel from store to piling site and return of unused steel to the Owners storage point, etc.

8.02.11 Plasticiser/Admixture when used as directed by the Engineer shall be included in piling rates.

8.01.12 The quoted rate for piling shall include for all quality assurance requirements, but not limited to providing for technical inspection, transportation of samples to laboratory, testing samples, maintaining and submitting all test records, etc.

8.01.13 The quoted rate for boring in separate borehole shall be inclusive of performing of SPT at regular intervals as specified and collecting rock cores from boreholes, upto the depth as specified shall be inclusive of transporting to laboratory, testing and reporting of the results.

8.01.14 Unit rate for low integrity test shall be inclusive of mobilization of the entire set of equipment, computer readout, printer, and equipment which may not have been included in the description but are essential for the satisfactory completion of the work as per internationally accepted practice. The rate quoted shall be inclusive of repeatability of test, preparation of pile top surface etc.

8.02.00 Measurement

8.02.01 Piling length shall be measurement by linear measurement from pile cut-off level to the tip of pile in meters upto second place of decimal separately for each diameter and capacity of pile. The length of pile to be cast above cut off level, as per specification, and as approved by Engineer, shall be considered for cement reconciliation only. Theoretical diameter of piles shall be considered for reconciliation of cement consumption. No extra payment shall be made for the length from existing ground to cut-off level.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 19 OF 26

- 8.02.02 Reinforcement steel shall be measured for reconciliation purpose only and the measurement shall be done for providing and placing reinforcement in piles, by weight in tones, up to third place of decimal in the following manner:
- i) The weight shall be arrived at by multiplying the actual length measured alongwith standard hooks, rings or spirals, spacers, cranks, bends, authorized laps, etc. by sectional weight. These shall be submitted with supporting documents giving the schedule of bars with sketches. The sectional weight to be adopted shall be IS code's sectional weight. Nothing extra shall be payable to the contractor on account of difference in weight, if any, due to different methods adopted for issue and measurement.
 - ii) Standard hooks, cranks, bend, authorized laps, supports, hangers and chairs which are covered in approved bar bending schedule shall be measured in tones.
 - iii) Dowels, neither shown on the drawings nor instructed by the Engineer, but required for construction facilities shall not be measured.
- 8.02.03 Breaking off of piles, due to subsequent change in design cut off level, shall be measured separately. This shall be measured in cubic metres upto second place of decimal. This will be payable only when the pile is cast and on the basis of written instruction of the Engineer for lowering of COL.
- 8.02.04 Measurements for the item of boring in a separate borehole shall be measured in metres from ground level upto the depth as specified, upto second place of decimal. Item of work of boring in soil and coring in rock shall be measured separately for the actual length of boring in soil and coring in rock.
- 8.02.05 The item for pile integrity test shall be measured in terms of no. of piles tested.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 20 OF 26

ANNEXURE-A**Specific Requirements for Bored Cast-in-situ RCC Piles**

A1.0 Minimum cement concrete grade M-25

Minimum cement content 400 Kg/M³

A1.1 Safe load

Diameter of Pile

Diameter of Pile (mm)	Vertical/ Compression (MT)	Horizontal/ Lateral (MX)	Pull out/Tension (MT)
*	*	*	*
*	*	*	*

A2. Installation criteria

The installed pile(s) shall satisfy the following criteria.

A2.1 In Soil/weathered Rock

- a) Minimum length of the pile shall be _____* m below COL.
- b) The pile shall be terminated after penetrating through the strata having SPT penetration less than ____* cm for ____* blows, for a minimum length of _____* times the diameter of the pile.

A2.2 In Rock

- a) Piles shall be installed and socketed into the rocks for a length (socketing length) equal to _____* times the pile diameter subject to a minimum of _____* meter below the socketing horizon.
- b) Socketing horizon shall consist of rock strata having minimum uniaxial compressive strength of _____* kg/sq.cm.

A3. Average cut-off level for tender design and initial load test can be assumed as _____* m below ground level.

A4. A protocol shall be signed between BHEL site and contractor regarding,

Strata at the founding depth

Installation criteria



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION – D21

REV.NO. 00 DATE 19/12/2019

SHEET 21 OF 26

Socketing depth

Density of bentonite before concreting

Slump of concrete.

Time interval between end of boring and start of concreting,

* Values shall be indicated separately depending upon subsoil strata of the site.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 22 OF 26

ANNEXURE-B

List of Equipments

Sl.No	Description	Capacity No.
1.	Piling Rigs	
2.	Chisel	3 T min 6 T max
3.	High pressure Mud Pumps	10 HP min 25 HP max
4.	Bentonite mixing plants	
5.	Concrete batching plant	
6.	Soil testing equipments	

Note:

1. The no. and capacity of the piling equipment varies for each work.
2. Additional equipments shall be mobilized if required as per the directions of the Engineer to match the work schedule at no extra cost to the Owner.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 23 OF 26

ANNEXURE-C

Bentonite suspension used for piling work shall satisfy the following requirements

- a) Liquid limit of bentonite when tested in accordance with IS: 2720(Part V) shall be more than 300 percent and less than 450 percent.
- b) Sand content of the bentonite powder shall not be greater than 7 percent.
- c) Bentonite solution should be made by mixing it with fresh water using pump for circulation. The density of the freshly prepared bentonite suspension shall be between 1.034 and 1.10 gm/ml depending upon the pile dimensions and type of soil in which the pile is to be installed. However, the density of bentonite suspension after mixing with deleterious materials in the pilebore may be upto 1.25 gm/ml.
- d) The Marsh viscosity when tested by a Marsh cone shall be between 30 to 60 seconds.
- e) The differential free swell shall be more than 540 percent.
- f) The pH value of the bentonite suspension shall be between 9 and 11.5.



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 24 OF 26

ANNEXURE-D

PILE DATA

1. Reference No. Location (Co-ordinates) _____ area.
2. Sequence of Piling
3. Pile diameter & Type
4. Working level (Platform level)
5. Cut off level (COL)
6. Actual length below COL
7. Pile termination level
8. Top of finished concrete level
9. Date and time of start and completion of boring.
10. Depth of Ground water table in the vicinity.
11. Type of soil at pile tip
12. Method of boring operation
13. Details of drilling mud as used:
 - i) Freshly supplied mud
 - Liquid limit -
 - Sand content -
 - Density -
 - Marsh viscosity -
 - Swelling index -
 - pH value -
 - ii) Contaminated mud
 - Density -
 - Sand content -



TITLE:

**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 25 OF 26

14. SPT* N values in soil (from the nearest bore hole).
+UCS** value in rock (from the nearest bore hole).

* Standard penetration Test
** Unconfined compression strength
15. Chiseling if any, from..... m to m
16. Date and time of start and completion of concreting.
17. Method of placing concrete
18. Concrete quantity
Actual

Theoretical
19. Ref. Number of test cubes
20. Grade and slump of concrete
21. Results of test cubes
22. Reinforcement details:
Main Reinforcement
No. _____
Dia. _____
Depth _____
Stirrups: Type
No. _____
Dia. _____
Spacing _____
23. Any other information regarding obstructions, delay and other interruption to the sequence of work.



TITLE:
**TECHNICAL SPECIFICATION FOR
BORED CAST-IN-SITU RCC PILES**

SPECIFICATION NO. PE-TS-457-600-C021

VOLUME - II B

SECTION - D | SUB-SECTION - D21

REV.NO. 00 DATE 19/12/2019

SHEET 26 OF 26

TABLE -1

FREQUENCY OF SAMPLING AND TESTING

SI. No	Type of material work	Nature of Test/ characteristics	Method of Test & frequency	No. of test	Acceptance Criteria
1.	Pilebore size a) diameter b) length		Physical measurement	each pile	as per specification
2.	Founding level	to establish socketing horizon/ and or founding level & upto depth 5m below founding level.	in separate borehole meant for the purpose a) SPT in soils/ weathered rock b) Core & UCS value of rock	1 borehole for 100-150 piles or group of 150 Sqm	Annexure - B
3.	Bentonite (Mud) properties. a) Basic properties of bentonite before use. b) Contaminated mud from pile bore bottom before concreting	Liquid Limit, Marsh Viscosity, Specific gravity, sand content, swelling index, pH value. Density, sand content	in lab in lab	As per Cl. 5.7 Each Pile	As per Annexure C As per annexure C
4.	Position and Alignment	-	Physical or any Approved method	Each Pile	As per Cl. 4.3
5.	Cleaning of pilebore	-	As per Cl. 5.8	Each Pile	Pilebore be free from bored materialcuttings debris/sludge
6.	Reinforcement (R/F) Spacing of longitudinal R/F cover laps binding of laterals		Physical inspection and measurement	each cage	As per approved design
7.	Concrete a) Workability b) Cubes	Slump cone test Compressive Strength test	Each pile As per spec.	As per Cl. 5.5 As per Cl. 5.5	As per specification. As per IS: 456
8.	Materials like aggregate, sand etc.	As per technical specification for concrete and relevant IS codes			
9.	Pile head		Physical	each pile	



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 16

VOLUME: II B

SECTION - D

SUB-SECTION – D22

SITE LEVELLING & GRADING WORKS

SPECIFICATION NO. PE-TS-457-600-C022



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 16

C O N T E N T

CLAUSE NO.	DESCRIPTION	SHEET NO.
1.00.00	GENERAL	3
2.00.00	SCOPE	3
3.00.00	MATERIALS	4
4.00.00	QUALITY CONTROL	6
5.00.00	EXECUTION	6
6.00.00	RATES AND MEASUREMENTS	15



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 16

**GENERAL TECHNICAL SPECIFICATION
FOR
SITE LEVELLING AND GRADING**

1.00 GENERAL

This specification cover the works to be carried out for “**Site Levelling and Grading Works including Slope Protection**” etc for the entire plant and associated areas. The specified formation level(s) shall be achieved either by excavation or by raising with controlled fill with excavated/borrowed earth as the case may be.

2.00 SCOPE

2.01 The scope include all works involved in levelling the site to the lines, grades, cross sections and dimensions as shown on the approved drawings and/or as directed by the engineer including site clearance, setting out, earth work in excavation, stacking, loading, transportation, unloading, dewatering, drainage, filling, watering, compaction, turfing on slopes (if required), lighting, disposal of residual/surplus earth etc. It also include supplying and providing all labour, materials, supervision, services, equipments, tools and plants, testing and all incidental items of work not shown or specified but reasonably implied or necessary for the completion of the work etc.

2.02 All tools and plants, equipments and machineries to be used in this work shall be of standard quality and manufactured by reputed concerns conforming to Indian Standard (IS) codes or equivalent thereof.

2.03 Work to be provided by the Contractor

The works to be provided by the contractor unless specified otherwise shall include but not be limited to the following.

a) Supplying and providing all labour, supervision, services including as required under statutory labour regulations, materials, equipments, tools and plants, approaches, transportation etc required for the completion of the work.

b) Preparation and submission of detailed scheme of all operations required for executing the work (material handling, placement, services, approaches etc) to the engineer for approval.

c) Carrying out sampling and testing on fill materials/fills to assess the quality/moisture content/degree of compaction and submission of the test results whenever required by the engineer.

d) Design, construction and maintenance of Magazine of proper capacity for storage of explosives for blasting work and removal of the same after completion of the work etc.



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 16

2.04 Work to be provided by others

No work under this specification will be provided for by any agency other than the contractor unless specifically mentioned elsewhere in the contract.

2.05 Codes and Standards

All work shall be carried out as per this specification and shall conform to the latest revision and/or replacements of the following or any other Indian Standard (IS) codes unless specified otherwise.

IS: 1200 Methods of measurement of building and civil engineering works,
Part-1: Earthwork

IS: 2720 Method of test for soils (Relevant parts)

IS: 3764 Excavation work- Code of safety

IS: 4081 Safety code for blasting and related drilling operations

IS: 4701 Code of practice for earthwork on canals

IS: 6922 Criteria for safety and design of structures subject to underground
Blasts

In case of conflict between this specification and those (IS codes) referred to herein, the former shall prevail. In case any particular aspect of work is not covered specifically by the specification or/and by the IS codes, any other standard practice as may be specified by the engineer shall be followed.

2.06 Conformity with Designs

The contractor shall carry out the work as per the approved drawings, specification and as directed by the engineer.

3.00 MATERIALS

All materials required for the work shall be of best variety and approved by the engineer.

3.01 Materials for Excavation

For the purpose of identifying the various strata met during the course of excavation, the following classification is to be followed.



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION - D22

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 16

a) Soil

It include all type of soil including laterite, moorum etc with/without any percentage of kankars which can be excavated by normal means such as shovel, pick axe, crow bar, spade etc and those which do not fall under **clause 3.01 (b)** and (c) etc.

b) Soft Rock

It include the rocks (including weathered rock) which are removable by splitting with the help of crow bar, pick axe, wedges, pavement breakers, pneumatic tools, hammers or such implements etc and not requiring blasting (for excavation) in the opinion of the engineer.

c) Hard Rock

It includes the rocks, which require blasting for excavation in the opinion of the engineer. Where blasting is prohibited for any reasons, the excavation shall be carried out by chiselling or any other method as approved by the engineer. The mere fact that the contractor resorts to blasting shall not classify the soft rock under hard rock.

However, the engineer's decision on the type of strata encountered during excavation shall be the final and binding on the contractor.

3.02

Materials for Filling

Any coarse grained or fine grained low plastic soil free from vegetation, roots, shingle, salts, organic matters, sod and any other harmful chemicals shall be used for filling. The contractor shall test the fill material to establish its suitability and submit the results to the engineer for approval. Fill material shall be got approved by the engineer. The following type of materials shall not be used for filling.

- a) Materials from swamps, marshes and bogs
- b) Expansive clays
- c) Peat, logs, sod and perishable materials
- d) Materials susceptible to combustion
- e) Any material or industrial and domestic produce which will adversely affect other materials of work
- f) Materials from prohibited areas

The earth available by cutting the high grounds within the project site and the materials (if) available from the road excavation or any other excavation under the same contract shall be used for filling depending upon its suitability as fill material. Filling with excavated rock (in the project site) shall be done only with



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION - D22

REV.NO. 00 DATE 19/12/2019

SHEET 6 OF 16

the written permission of the engineer in the following manner. The boulders shall be broken into pieces not exceeding 150mm size in any direction and mixed with fine materials consisting of decomposed rock, moorum or any approved earth to fill the voids as far as possible and the mixture shall then be used for filling. In case the earth required for filling is over and above the earth available from the compulsory excavations within the project area, then borrow areas for obtaining suitable fill material shall be arranged by the contractor himself from outside the plant boundary limits and all expenses including royalties, taxes, duties etc shall be borne by him. He shall obtain and submit the necessary clearances/permissions from the concerned authorities to the engineer for the borrow areas/materials acquired.

4.00

QUALITY CONTROL

All works shall conform to the lines, levels, grades, cross sections and dimensions shown on the approved drawings and/or as directed by the engineer. The contractor shall establish and maintain quality control for the various aspects of the work, method of construction, materials and equipments used etc. The quality control operation shall include but not be limited to the following.

Sl. No.	Activity	Check
1	Lines, levels & grades	a) By periodic surveys b) By establishing markers, boards etc
2	Filling	(a) On quality of fill material (b) On moisture content of fill material (c) On degree of compaction achieved

5.00

EXECUTION

The contractor shall prepare and submit the detailed drawings/schemes for excavation and filling works as proposed to be executed by him showing the dimensions as per the construction drawings and specification adding his proposal of approaches, dewatering (if any), drainage and compaction etc within 15 days of award of the contract to the engineer for approval.

5.01

Site Clearance

Before the commencement of earthwork, the entire area of cutting and filling shall be cleared of all trees, stumps, bushes, grasses, vegetation etc with their roots, fences, logs, rubbish, water, slush etc. It is not necessary to remove all the soil containing fine hair like roots but only the rather heavy mats are to be removed. Cutting of trees shall include trees having girth of any size and removing roots upto a depth of 600mm below the existing ground level or 300mm below the formation level whichever is deeper. After the removal of roots of trees, the pot holes formed shall be filled with good earth in 250mm layers (loose thickness) and compacted unless otherwise directed by the engineer. The trees shall be cut in to suitable pieces as instructed by the engineer. Before earthwork is started, all the spoils, unserviceable materials and



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 7 OF 16

rubbish shall be burnt or removed and disposed off to the approved disposal area(s) as specified by the engineer. Useful materials, saleable timbers, fire woods etc shall be the property of owner and shall be stacked properly at the worksite in a manner as directed by the engineer.

5.02 Setting Out

On receiving the approval from the engineer with modifications and corrections if any, the contractor shall set out the work from the control points furnished by the engineer and fix permanent points and markers for the ease of periodic checking as the work proceeds. These permanent points and markers shall be fixed at the interval as prescribed by the engineer and shall be got checked and certified by the engineer after whom the contractor shall proceed with the work. It should be noted that this checking by the engineer prior to the start of the work will in no way relieve the contractor of his responsibility of carrying out the work to true lines, levels and grades as per the drawings and specification. If any errors are noticed in the contractor's work at any stage, the contractor at his own risk and cost shall rectify the same. The contractor shall take spot levels of the area (with respect to the bench mark/ available source as provided by the engineer) to be excavated or to be filled at an interval of not more than 10m or as directed by the engineer before starting any earth work and shall be submitted to the engineer for prior approval.

5.03 Excavation

Levelling by excavation shall be carried out where the existing ground levels are higher than the specified formation level. Excavation shall include removal of all materials whatever nature as may be and whether wet or dry shall be carried out exactly in accordance with the line, levels, grades and curves shown on the approved drawings and/or as directed by the engineer. All excavations shall be done to the minimum dimensions as required. The contractor shall obtain prior approval of the engineer for the method he proposes to adopt for excavation in different types of strata including dimensions, side slopes and dewatering if any, stacking or disposal etc. This approval however shall not in any way make the engineer responsible for any consequent loss or damage. The excavation must be carried out in the most expeditious and efficient manner. The work shall be carried out in a workmanlike manner without endangering the safety of nearby structures/services or works and without causing hindrance to any other activities in the area. **Prior to starting the excavation, the ground level at the location shall be checked jointly with the engineer.**

The rough excavation may be carried up to a maximum depth of 150mm above the final formation level. The balance shall be excavated with special care and the final surface shall be compacted by rolling with 6 passes of 8 to 10 tonne roller. If directed by the engineer, soft and undesirable spots shall be removed even below the final level. The extra excavation shall be filled up with good earth in 250mm layers (loose thickness) and compacted unless otherwise directed by the engineer. The contractor shall be paid for the extra excavation and filling at the appropriate items of work.



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 8 OF 16

If the excavation is done to a depth greater than that shown on the drawing or as directed by the engineer due to the contractor's fault, the excess depth shall be filled up to the required level with good earth in 250mm layers (loose thickness) and compacted unless otherwise directed by the engineer at the own risk and cost of the contractor.

Suitable slope in cutting as per the requirements and as directed by the engineer shall be adopted to withhold the face of earth. The contractor shall be held responsible for any damage to any part of the work caused by the collapse of the side of excavations.

5.03.01 Excavation in Hard Rock

Excavation in hard rock shall normally be done with blasting. In case where blasting is prohibited for any reasons, the excavation shall be carried out by chiselling or any other approved method as directed by the engineer. Personnel deployed for rock excavation shall be protected from all hazards such as loose rock/boulder rolling down and from general slips of excavated surfaces.

5.03.02 Blasting

a) General

Storage, handing and use of explosives shall be governed by the current explosive rules/regulations laid down by the Central and the State Governments. The contractor shall ensure that these rules/regulations are strictly adhere to. The following instructions are also to be strictly followed and the instructions wherever found in variance with the above said rules/regulations, the former (instructions) shall be superseded with the later (above said rules/regulations).

No child under the age of 16 and no person who is in a state of intoxication shall be allowed to enter the premises where explosives are stored nor they shall be allowed to handle the explosives. The contractor shall obtain licence from the District Authorities for undertaking the blasting work as well as for obtaining and storing the explosives as per Explosives Rules, 1940 corrected upto date. The contractor shall purchase the explosives, fuses, detonators etc only from a licensed dealer and shall be responsible for the safe custody and proper accounting of the explosive materials. The engineer or his authorized representative shall have the access to check the contractor's store of explosives and his accounts at any time. It is the full responsibility of the contractor to

transport the explosives as and when required for the work in a safe manner to the work spot.

Further, the engineer may issue modifications, alterations and new instructions to the contractor from time to time. The contractor shall comply with the same without these being made a cause for any extra claim.



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION - D22

REV.NO. 00 DATE 19/12/2019

SHEET 9 OF 16

b) Materials

All materials such as explosives, detonators, fuses, tamping materials etc proposed to be used in the blasting operation shall have the prior approval of the engineer. Only explosives of approved make and strength are to be used. The fuses known as instantaneous fuse must not be used. The issue of fuse with only one protective coat is prohibited. The fuse shall be sufficiently water resistant as to be unaffected when immersed in water for 30 minutes. The rate of burning of the fuse shall be uniform and shall be not less than 4 seconds per inch of length with 10% tolerance on either side. Before use, the fuse shall be inspected. Moist, damaged or broken ones shall be discarded. When the fuses are in stock for long, the rate of burning of fuses shall be tested before use. The detonators shall be capable of giving an effective blasting of the explosives. Moist and damaged detonators shall be discarded.

c) Storage of Explosives

The current Explosive Rules shall govern the storage of explosives. Explosives shall be stored in a clean, dry and well-ventilated magazine to be specially built for the purpose. Under no circumstances should a magazine be erected within 400m of the actual work site or any source of fire. The space surrounding the magazine shall be fenced and the ground inside shall be kept clear and free from trees, bushes etc. The admission to this fenced space shall be through a single gate only and no person shall be allowed without the permission of the officer in-charge. The clear space between the fence and the magazine shall not be less than 90m. The magazine shall be well drained. Two lightning conductors, one at each end shall be provided to the magazine. The lightning conductors shall be tested once in every year.

Explosives, fuses and detonators shall each be separately stored. Cases of explosives must be kept clear of the walls and floors for free circulation of air on all sides. Special care shall be taken to keep the floor free from any grains of explosives. Cases containing explosives shall not be opened inside the magazine and the explosives in open cases shall not be received into a magazine. Explosives which appear to be in a damaged or dangerous condition are not to be kept in any magazine but must be removed without delay to a safe distance and be destroyed.

Artificial light, matches, inflammable materials, oily cotton, rag waste and articles liable to spontaneous ignition shall not be allowed inside the magazine.

Illumination shall be obtained from an electric storage battery lantern. No smoking shall be allowed within 100m distance from any magazine. Magazine shoes without nails shall be used while entering the magazine. The persons entering the magazine must put on the magazine shoes which shall be provided at the magazine for this purpose and should be careful

* not to put their feet on the clean floor unless the magazine shoes on.



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 10 OF 16

* not to touch the magazine shoes on ground outside the clean floor.

* not to allow any dirt or grit to fall on the clean floor.

Persons with bare feet shall dip their feet in water before entering the magazine and then step directly from the tub to the clean floor. No person having article of steel or iron with/on him shall be allowed to enter the magazine. Workmen shall be examined before entering the magazine to check none of the prohibited articles are with them. A brush broom shall be kept in the lobby of the magazine for cleaning the magazine. Cleaning shall be done immediately after each occasion whenever the magazine is opened for receipt, delivery or inspection of the explosives.

The mallets, levers, wedges etc for opening the barrels or cases shall be of wood. The cases of explosives are to be carried by hand and shall not be rolled or dragged inside the magazine. Explosives which have been issued and returned to the magazine are to be issued first; otherwise those which have been stored long in the store are to be issued first. Neither the magazine shall be opened nor any person shall be allowed in the vicinity of the magazine during any dust storm or thunderstorm. All magazines shall be officially inspected at definite intervals and a record of such inspections shall be kept.

d) Carriage of Explosives

Detonators and explosives shall be transported separately to the blast site. Explosives shall be kept dry and away from direct rays of the sun, artificial lights, steam pipes or heated metal and other sources of heat. Before explosives are removed, each case or package shall be carefully examined to ascertain that it is properly closed and shows no sign of leakage.

No person except the driver shall be allowed to travel on the vehicle conveying explosives. No explosive shall be transported in a carriage or vessel unless all iron or steel therein the carriage or vessel which are likely to contact the package containing explosives are effectually covered with lead, leather, wood, cloth or any other suitable material. No light shall be carried on the vehicle carrying explosives and no operation connected with the loading, unloading and handling of explosives shall be conducted after sunset.

e) Use of Explosives

The contractor shall appoint an agent who shall personally superintend the firing and all operations connected therewith. The contractor shall satisfy himself that the person so appointed is fully acquainted with his responsibilities. Holes for charging the explosives shall be drilled with pneumatic drills and the drilling pattern shall be so planned that the rock pieces after blasting will be suitable for handling. The hole diameter shall be of such a size that the cartridges can easily pass down through them and any undue force is not required during charging. Charging operation shall be carried out by or under the personal supervision of the shot firer. Wrappings shall never be removed



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 11 OF 16

from the explosive cartridges. Only one cartridge at a time shall be inserted in a hole and wooden rods shall only be used for loading and stemming the shot holes. Only such quantities of explosives as are required for a particular work shall be brought to the work site. Should any surplus remain when all the holes have been charged shall be carefully removed to a point at least 300m away from the firing point.

The authorized shot firer himself shall make all the connections. The shot firing cable shall not be dragged along the ground to avoid any damage to the insulation. The shot firing cable shall be tested each time for its continuity and possible short circuiting. The shot firer shall always carry the exploder handle with him until he is ready to fire shots. The number of shots fired at a time shall not exceed the permissible limits. Before any blasting is carried out it shall be ensured that all workmen, vehicles and equipment on the site are cleared from an area of minimum 300m radius from the firing point or as required by the statutory regulations at least 10 minutes before the time of firing by sounding a warning siren and the area shall be encircled by red flags.

The explosives shall be fired by means of an electric detonator placed inside the cartridge. For simultaneous firing of a number of charges, the electric detonators shall be connected with the exploder through the shot firing cable in a simple series circuit. Due precautions shall be taken to keep the firing circuit insulated from the ground, bare wires, rails, pipes or any other path of stray current etc and keep the lead wires short circuited until it is ready to fire. Any kink in the detonator leading wire shall be avoided. For simultaneous firing of a large number of shot holes, use of cordtex may be done. An electric detonator attached to its side with adhesive tape shall initiate cordtex connecting wire or string. Blasting shall only be carried out at certain specified times to be agreed jointly by the contractor and the engineer.

At least five minutes after the blast has been fired in case of electric firing or as stipulated in the regulations, the authorized shot firer shall return to the blast area and inspect carefully the work and satisfy himself that all the charged holes have exploded. Cases of misfired unexploded charges shall be exploded by drilling a parallel fresh hole at a distance of not less than 600mm from the misfired hole and by exploding a new charge. The authorized shot firer shall be

present during the removal of debris as it may contain unexploded explosives near the misfired hole. The workmen shall not return to the site of firing until at least half an hour after firing.

Where blasting is to be carried out in proximity of other structures, controlled blasting by drilling shallow shot holes and proper muffling arrangements with steel plates loaded with sand bags etc shall be used on top of the blast holes to prevent the rock fragments from causing any damage to the adjacent structures and other properties. Adequate safety precautions as per building byelaws, safety codes, statutory regulations etc shall be taken during blasting operations.



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION - D22

REV.NO. 00 DATE 19/12/2019

SHEET 12 OF 16

5.03.04

Restrictions on Blasting

- a) Blasting which may disturb or endanger the stability, safety or quality of the adjacent structures/foundations shall not be permitted.
- b) Blasting within 200m of a permanent structure or construction work in progress shall not be permitted.
- c) Progressive blasting shall be limited to two third of the total remaining depth of excavation.
- d) No large scale blasting operations will be resorted to when the excavation reaches the last one metre and only small charge preferably black powder may be allowed so as not to shatter the parent rock.
- e) The last blast shall not be more than 0.50 m in depth.
- f) In rocky formations, at locations where specifically indicated or ordered in writing by the engineer, the use of explosives shall be discontinued and excavation shall be completed by chiselling or any other suitable method as approved by the engineer.

5.04

Sorting of Excavated Materials

The excavated material shall be carefully sorted for use in filling the areas in the project site by removing roots, grasses, organic matters and other objectionable materials and be sorted out into different types of materials for use and as directed by the engineer. The excavated material which is not considered fit for filling purpose shall be immediately removed and disposed at such a place and in such a manner as will be directed by the engineer. The material found unusable should be got approved by the engineer before actually disposing it off. The useful materials that cannot be used directly shall be heaped in separate area as stock piles. Stockpiles shall be of regular size as far as possible for ease of measurement. The materials heaped shall be utilised as and when required and as directed by the engineer. The cost of complete item of earthwork includes the cost of rehandling of the materials and temporarily heaped and reused.

5.05

Disposal of Surplus/ Waste Materials

Surplus and other waste materials shall be removed and disposed of from the construction site to the area demarcated by the engineer. No material shall be wasted unless approved by the engineer.

5.06

Earth Work in Filling

Levelling by raising with controlled fill of approved excavated/borrowed earth shall be carried out where the existing ground levels are lower than the specified formation level. After clearing site as per clause 5.01, the original ground shall be compacted by rolling subject to a minimum 6 passes of 8 to 10 tonne roller. The approved earth/fill material shall then be spread in horizontal layers not exceeding 300mm in compacted thickness. Each layer shall be watered and thoroughly compacted with proper moisture content and such equipments as may be required to obtain a minimum of 95% of its maximum dry density as



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 13 OF 16

determined by standard Proctor's test as per IS: 2720 part-VII or 85% of relative density as per IS:2720 part-XIV as specified. Moisture content of the fill material shall be controlled near optimum moisture content during compaction.

The fill material shall be tested for its optimum moisture content and maximum dry density as per IS: 2720, part-VII. Moisture content shall be checked at the source of supply in accordance with IS:2720 part- II and if found less than that required for proper compaction, the same shall be made good either at the source or after spreading the soil in loose thickness for compaction. In the latter case, water shall be sprinkled directly from the hose line or from the truck-mounted water tank etc making due allowance for evaporation losses and the fill material be thoroughly mixed by means of harrows, rotary mixers or by any other suitable approved method until the layer is uniformly wet. **Flooding shall not be permitted for watering purpose under any circumstances.** If the material delivered is too wet, it shall then be dried by aeration and exposure to the sun till the moisture content is suitable for compaction. Should circumstances arise owing to wet weather the moisture content cannot be reduced to the required amount by the above procedure, the work on compaction shall be suspended. Clods or hard lumps of earth shall be broken to have a maximum size of 150mm when being placed in the layers before compaction. For each of the above tests on the fill material, one sample for every 10,000cu.m shall be tested. Additional samples shall be tested whenever there is a change of source or type of material.

Before start of filling, the contractor shall submit the engineer his proposal for the methodology to be adopted for compaction. The compaction equipments as approved by the engineer shall only be employed to compact the different type materials encountered during construction. If directed by the engineer, the contractor shall demonstrate the efficacy of the plant he intends to use by carrying out compaction trials. Moisture content of the fill material shall be controlled near optimum moisture content during compaction.

The compacted layer shall be tested for its dry density as per IS:2720, part-XXVIII or XXIX as directed by the engineer. Samples shall be taken at the rate of one sample for every 10,000sq.m area of each compacted layer. In addition random checks shall be carried out in compacted layers by means of Proctor needle penetration test. Contractor shall submit all the test results to the engineer immediately after completion of the tests. A sample shall be deemed to have passed the test when the dry density of the compacted fill is equal to or more than 95% of its maximum dry density. When field density measurements reveal any soft areas in the fills, further compaction shall be carried out as directed by the engineer. If in spite of that, the specified compaction is not achieved, the material in the soft areas shall be replaced with approved material compacted to the density requirements and satisfaction of the engineer.

Subsequent layers shall be placed only after the finished layer has been tested and accepted by the engineer.

Where the filling is to be done across low swampy ground that will not support the weight of trucks or other hauling equipments, the lower part of the fill shall be constructed by dumping successive loads in a uniformly distributed



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 14 OF 16

layer of a thickness not greater than that necessary to support the hauling equipment while placing subsequent layers.

5.07

Dewatering and Drainage

It shall be ensured that the area to be excavated/filled shall be free from water. The contractor shall remove the water (if any) by pumping or by any other means as approved by the engineer. At all times, the surface of cutting/filling during execution shall be maintained at such a cross fall as will shed water and prevent ponding. All existing drains/channels (if any) in the work area shall be suitably diverted by the contractor before taking up any excavation or filling. These diversions shall be such that it shall ensure effective disposal of water without any accumulation or flooding within the project site and in adjoining areas.

5.08

Finishing Operations

Finishing operation shall include the work of shaping and dressing the excavated/filled ground to the required grades, levels, lines, side slopes, crosssections and dimensions as shown on the approved drawings or as directed by the engineer.

5.09

Turfing

Turfing shall be provided at the slopes and other locations as shown on the drawings or as directed by the engineer. The turf shall be of approved quality of grass. The sod shall consist of dense, well rooted growth of permanent and desirable grasses indigenous to the locality where it is to be used and shall be practically free from weeds or other undesirable matter. The grass on the sod shall have a length of approximately 50mm and the sod shall be free of any

debris. Thickness of the sod shall be as uniform as possible with 50 to 80mm of soil covering the grass roots depending on the nature of the sod so that all the dense root system of the grasses are retained in the sod strip. The sods shall be cut in rectangular strips of uniform width not less than about 300mm x 250mm size but not so large so that it is convenient to handle and transport without damage.

The area to be sodded shall be previously constructed to the required slope and cross section. Prior to placing the sods, the slopes shall be **roughened** and wetted in order to have a satisfactory bond. The strips of sod shall be laid in close contact with each other and be tamped firmly in place so as to fill and close the joints between them. The turfing so laid shall be well watered and protected until final acceptance.



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 15 OF 16

5.10 Approaches

The contractor shall provide proper approaches for workmen and inspection.

5.11 Lighting

Full scale lighting are to be provided if night work is permitted or directed by the engineer. If no night work is in progress, red warning lights should be provided at the edges of excavations and fills.

6.00 RATES AND MEASUREMENTS

6.01 Rates

a) The item of work in the schedule of quantities describe the work very briefly. The various items of the schedule of quantities shall be read in conjunction with the corresponding sections in the technical specification including amendments and additions if any. For each item in the schedule of quantities, the bidder's rate shall include all the activities covered in the description of the items as well as for all necessary operations in detail as described in the technical specification.

b) No claims shall be entertained if the details shown on the released for construction drawings differ in any way from those shown on the tender drawings.

c) The unit rate quoted shall include minor details which are obviously and fairly intended and which may not have been included in these documents but are essential for the satisfactory completion of the work.

d) The bidder's quoted rate shall be inclusive of supplying and providing all labour, men, materials, equipments, tools and plants, supervision, services, approaches, schemes etc.

6.02 Measurements

Method of measurements are specified in the proceeding sections. Where not so specified, the latest version of IS:1200, Part-1 shall be applicable.

a) The length, breadth and depth shall be measured correct to the nearest centimetre if measurements are taken by tape. Rounding of numericals shall be as per relevant IS Codes. If the measurements are taken with staff and level, the levels shall be recorded correct to 5mm. The area and volume shall be worked out in square meter and cubic meter correct to the nearest of two decimal places.

b) For earth work in excavation, the ground levels shall be taken before and after completion of the work in the actually excavated area. The quantity of earth work in cutting shall be computed from these levels in cubic meter.



TITLE:

**TECHNICAL SPECIFICATION FOR
SITE LEVELLING & GRADING
WORKS**

SPECIFICATION NO. PE-TS-457-600-C022

VOLUME - II B

SECTION - D | SUB-SECTION – D22

REV.NO. 00 DATE 19/12/2019

SHEET 16 OF 16

c) Where soft rock and hard rock are mixed, the measurement shall be done as follows. The two types of rock shall be stacked separately and measured in stacks. The net quantity of each type of rock shall be so arrived by applying a deduction of 50% for looseness/voids in the stacks. If the sum of net quantity of the two types of rock so arrived exceeds the total quantity of excavation then the quantity of each type of rock shall be worked out from the total quantity (from excavation) in the ratio of net quantities in stack measurements of the two types of rock. If stacking is not feasible, the method as suggested by the engineer shall be followed.

d) Where soil, soft rock and hard rock are mixed, the measurement shall be done as follows. The soft and hard rock shall be removed from the excavated material and stacked separately and measured in stacks. The net quantity of each type of rock shall be so arrived by applying a deduction of 50% for looseness/voids in stacks. The difference between the entire excavation and the sum of the quantities of soft and hard rocks so arrived shall be taken as soil.

e) For earth work in filling, the actual measurements of fill shall be calculated by taking levels of the original ground before start of the work but after site clearance and after compaction of fills. The quantity of earth work in filling shall be computed from these levels in cubic meter.

f) For turfing, the measurement shall be made on the finished work in square meter.



TITLE:

**TECHNICAL SPECIFICATION
FOR ANTI-TERMITE
TREATMENT**

SPECIFICATION NO. PE-TS-457-600-C023

VOLUME - II B

SECTION - D | SUB-SECTION – D23

REV.NO. 00 DATE 19/12/2019

SHEET 1 OF 5

VOLUME – II B

SECTION – D

SUB SECTION – D23

ANTI-TERMITE TREATMENT

SPECIFICATION NO. PE-TS-457-600-C023



Bharat Heavy Electricals Limited
Project Engineering Management
PPEI Building, Power Sector,
Plot No. 25, Sector 16A,
Noida (U.P.)-201301



TITLE:

**TECHNICAL SPECIFICATION
FOR ANTI-TERMITE
TREATMENT**

SPECIFICATION NO. PE-TS-457-600-C023

VOLUME - II B

SECTION - D | SUB-SECTION – D23

REV.NO. 00 DATE 19/12/2019

SHEET 2 OF 5

TABLE OF CONTENTS

CLAUSE NO.	DESCRIPTION	PAGE NO.
1.00.00	SCOPE	3
2.00.00	EXECUTION	3
3.00.00	ACCEPTANCE CRITERIA	4
4.00.00	RATES	4
5.00.00	METHOD OF MEASUREMENT	4
6.00.00	I.S. CODES	5



TITLE:

**TECHNICAL SPECIFICATION
FOR ANTI-TERMITE
TREATMENT**

SPECIFICATION NO. PE-TS-457-600-C023

VOLUME - II B

SECTION - D | SUB-SECTION - D23

REV.NO. 00 DATE 19/12/2019

SHEET 3 OF 5

**TECHNICAL SPECIFICATION
FOR
ANTI-TERMITE TREATMENT**

1.00.00 SCOPE

The scope of work is to set up a chemical barrier against attack by subterranean termites while the building is under construction.

2.00.00 EXECUTION

2.01.00 General

All work shall in general be executed as specified in IS: 6313 Part II-1981 and as per approved specification of the agency having special know-how for the job.

All necessary work to ensure uniform distribution and proper penetration of treatment of treating solution shall be done according to the instruction of the Engineer.

Soil treatment shall not be done when it is raining or when the soil is wet with rain or subsoil water. Once formed, the treated soil barrier shall not be disturbed.

2.02.00 Chemicals and Rate of Application

Any of the following chemicals (conforming to relevant Indian Standards) in water emulsion shall be applied by pressure pumps, uniformly over the area treated.

Chemicals	Concentration by Weight, Percentage

Chlorpyrifos Emulsifiable (IS 8944 - 1978)	: 1.0

Heptachlor Emulsifiable Concentrate (IS: 6439 - 1978)	: 0.5

Chlordane Emulsifiable Concentrate (IS: 2682 - 1984)	: 1.0

2.02.01 Treatment of Column Pits, Wall Trenches and Basement Excavations

Foundations, basements etc. may either be fully enveloped by the chemical barrier or the treatment may start 500 mm below ground level. The bottom surface and sides of excavation (upto a height of about 300 mm) for column pits, walls trenches and basements shall be treated with chemicals at the rate of 5 litres / M² of surface area. Backfills around columns, walls etc. shall be treated at the rate of 7.5 litres / M² of the vertical surface. Chemical treatment shall be done in stages following the compaction of earth in layers. The treatment shall be carried out after the ramming operation is done by

**TITLE:**

TECHNICAL SPECIFICATION FOR ANTI-TERMITE TREATMENT

SPECIFICATION NO. PE-TS-457-600-C023

VOLUME - II B

SECTION - D | SUB-SECTION – D23

REV.NO. 00 DATE 19/12/2019

SHEET 4 OF 5

rodding the earth at 150 mm centres close to the wall surface and spraying the chemicals in the specified dose.

2.02.02 Treatment of Top Surface of Plinth Filling

Holes 50 mm to 75 mm deep at 150 mm centres both ways shall be made with crowbars on the surface of compacted plinth fill. Chemical emulsion at the rate of 5 litres / M² of surface shall be applied prior to laying soling or sub-grade. Special care shall be taken to maintain continuity of the chemical barrier at the junction of vertical and horizontal surfaces.

2.02.03 Treatment of Soil Surrounding Pipes, Wastes and Conduits

Special care shall be taken at the points where pipes and conduits enter the building and the soil shall be treated for a distance of 150 mm and a depth of 75 mm at the point where they enter the building.

2.02.04 Treatment of Expansion Joints

These shall receive special attention and shall be treated in a manner approved by the Engineer.

2.02.05 Treatment at Junction of the Wall and the Floor

Special care shall be taken to establish continuity of the vertical chemical barrier on inner wall surfaces from ground level up to the level of the filled earth surface.

A small channel 30 x 30 mm shall be made at all the junctions of wall and columns with the floor. Rod holes made in the channel up to the ground level 150 mm apart and the chemical emulsion poured along the channel at the rate of 7.5 litres per square meter of the vertical wall or column surface. The soil should be tamped back into place after this operation.

3.00.00 ACCEPTANCE CRITERIA

The Contractor shall give a 10-year service guarantee in writing supplemented by a separate and unilateral guarantee from the specialised agency for the job to keep the building free of termites for the specified period.

4.00.00 RATES

Rates shall be of complete work per unit area as stated in the Schedule.

5.00.00 METHOD OF MEASUREMENT

Complete work of anti-termite treatment shall be measured for plinth area treated.



TITLE:

**TECHNICAL SPECIFICATION
FOR ANTI-TERMITE
TREATMENT**

SPECIFICATION NO. PE-TS-457-600-C023

VOLUME - II B

SECTION - D | SUB-SECTION – D23

REV.NO. 00 DATE 19/12/2019

SHEET 5 OF 5

This includes treatment, to foundations, walls, trenches, basements, plinth, buried pipes, conduits etc. The extended portions of foundation and like beyond plinth limit shall be the part of complete work.

6.00.00

I.S. CODE

Relevant code applicable for this Specification.

IS: 6313 (Part-II) 1981 : Code of Practice of Anti-Termite Measures in Buildings
Pre-constructional chemical treatment measures.

VOLUME-III PRICE SCHEDULE, REV-01	
JOB: LEVELLING GRADING, PILING WORK INCLUDING TESTING OF PILES AND OTHER ASSOCIATED WORKS ETC. OF FGD SYSTEM FOR 3X660 MW NPGCL NABINAGAR TPP, BIHAR.	
TENDER NO PSER:SCT:NBN-C2027:20	
PREAMBLE	
1	This preamble forms part of tender document and schedule of items. The tenderer should read this preamble carefully before filling in rates for various items. Clauses under this preamble shall be read in conjunction with various volumes of tender and other tender sections as applicable and shall have precedence over any contrary statement mentioned any where in this document.
2	The work shall be carried out strictly as per specifications, description of the items in these schedule and / or engineer's instructions. Drawings enclosed with the tender are only preliminary and for guidance/tender purposes giving some idea of the work involved. The work is to be executed as per terms & conditions of the tender and actual drawings/documents, which shall be furnished during execution.
3	Items of work provided in this schedule but not covered in this specification shall be executed strictly as per instruction of the engineer.
4	Unless specifically mentioned otherwise in the tender document, the tenderer shall quote for the finished items and shall provide for the complete cost towards power, fuel, tools, tackles, equipment, constructional plants, temporary works, labour, dismantling of all temporary piping, structures, valves, pumps, tanks & other misc. equipment, strengthening of roads/culverts/bridges etc. including arranging all clearances etc. required for carrying out different activities & tests, materials, levies, transport, layout, repairs, rectification, maintenance till handing over, supervisions, colonies, shops, establishments, overheads, profits and all incidental items not specifically mentioned but reasonably implied and necessary to complete the work according to the complete tender document and this schedule.
5	The quantities of the various items mentioned in this schedule of items are approximate, based on very preliminary information and may vary to any extent or be deleted altogether. The quoted rates of each item will remain firm throughout the period of execution including extension, for reasons whatsoever, as long as variation in the total value of work executed under any part of this contract including extra items, if any but excluding any price variation remains, within fifteen percent ($\pm 15\%$) of the awarded price as per LOI.
6	Prior written approval of BHEL shall be sought by the contractor in case quantity variation of any item crosses +50% (plus fifty percent) limit during execution and approval to be obtained before execution of further quantity for this item.
7	In case Sealed /Paper Price Bids are opened for finalisation of the tender, for any Item Rate/BOQ based service contract, possibility of variation of quantity/ addition/deletion of items can not be ruled out. Under such circumstances, after execution of work, if it is observed that standing as L-1 is changed based on actual quantity executed, the bidder shall give suitable rebate to maintain your standing as L-1. Since this aspect can be assessed at the end of execution, necessary adjustment will be effected at the end of execution in final bill. This condition shall not be applicable where the tender is finalised through Reverse Auction.
8	BHEL reserve the right to rationalize the rates, quoted by L-1 bidder against unit rate items and/ or other optional items with respect to item-wise lowest rates (amongst the participating bidders), before placement of order. The rates of unit rate/optional items shall remain valid till execution of the order, if the job/work is awarded to the bidder.
9	The rates quoted shall be inclusive of cleaning of site of any vegetation, dressing, clearing of old structures and leveling etc. including fixing of grid pillars, benchmarks etc. required for commencement of site activities. No separate payment will be made towards the same. However, if separate rate for such item is available in the rate schedule, the same shall be considered.
10	Rates shall be quoted in figures and in words in clear legible writing. No overwriting is allowed. All scoring and cancellations should be countersigned and in case of illegibility the interpretation of engineer shall be final. All entries shall be in English language.
11	All works item wise shall be measured upon completion and paid for at the rates quoted and accepted as per BHEL approved payment schedule/billing break-up.
12	The tenderer shall be deemed to have visited site and made himself aware of all the site conditions, studied the specifications and details of work to be done within the time schedule attached and to have acquainted himself of the conditions prevailing at site before submission of his bid/offer. No claim whatsoever due to lack of knowledge of site conditions shall be entertained after award of the work.
13	No splitting of the job is envisaged unless the same is specifically indicated in the TCC/Vol-1F. Decision of BHEL in this regard shall be final and binding to the bidders.
14	Bidders are not allowed to alter the Price Schedule format including item description, quantity etc. and the offer is liable for rejection if the bidders submit their prices in Price Schedules modified by them. BHEL reserves the right to reject the offers of bidders who submit offers in Price Formats which are modified/altered by them. Also putting any comments instead of rates/price in the designated column of the rate schedule shall make the offer liable for rejection.
15	Bidders to note that for Civil &/Structural packages, against a particular item against a ST No. appearing in more than one schedule of the BOQ, same rate must be quoted in all schedules for that particular items with same descriptions. If by error, different rates are quoted in different schedules for same ST No. (i.e. item with same description), then the higher of the rates shall be considered for evaluation but awarding shall be done with the lower rate, if the bidder becomes L-1. The same modality shall be applicable for other item rate service contracts where item with same description is repeated in different schedules.
16	For Lumpsum Service Contract : The items/components indicated in the tender is indicative and may vary to any extent. No compensation shall be payable in case of any variation in the items/components listed in the bill of quantities if the executed weight remains within the variation limit. However, in case of deletion of any item or addition of new items over and above the items listed or variation of existing quantity beyond variation limit specified, adjustment (i.e. Payment or recovery as the case may be) shall be done on pro-rata basis based on the Rate per MT worked out from the quoted lump-sum Price and the total weight of components listed /indicated in price schedule plus 15% weight variation limit.
17	Engineer's decision shall be final and binding on the contractor regarding clarification of items in the schedule with respect to the other sections/volumes of the contract.
18	In case of tender for Civil and/or Structural works, if the Non-schedule items are not quoted by the bidder, it will be treated at par with rate of corresponding item of CPWD/PWD/DSR schedule as prescribed in the tender/BOQ cum Rate Schedule. PVC/escalation is not payable for these Non-scheduled items.
19	No interest, whatsoever, shall be payable by BHEL on the security deposit, any bank guarantee submitted or any amount due to successful bidder/contractor. No idling charge whatsoever (either for labour or any other resources) is payable by BHEL for any reason whatsoever.
20	Size and weights of various items are mentioned in the attached BOQ cum rate/price schedule for reference purpose only & these shall not be taken into consideration for quoting/calculating amount in the rate schedule. These shall be utilised as per relevant sections of tender. Bidders shall quote for each item in the rate column, taking unit as mentioned in the quantity column. Rates shall be filled in both figures and words. Amount shall be calculated based upon these rates multiplied by the mentioned quantity for the respective items.
21	Bidder's Total price shall be considered for evaluation unless stated otherwise.
22	In case of BOP packages, if Bidder does not quote/indicate the price for freight charges against indicated rate schedule, the same shall be considered as 2% of basic price and adjusted with the total quoted price against each item keeping the total quoted price unaltered.

VOLUME-III PRICE SCHEDULE, REV-01			
JOB: LEVELLING GRADING, PILING WORK INCLUDING TESTING OF PILES AND OTHER ASSOCIATED WORKS ETC. OF FGD SYSTEM FOR 3X660 MW NPGCL NABINAGAR TPP, BIHAR.			
TENDER NO PSER:SCT:NBN-C2020:20			
SCH-1 : TOTAL PRICE			
SL NO	DESCRIPTION	PRICE SCHEDULE REF	TOTAL PRICE (IN INR)
1.0	TOTAL PRICE FOR LEVELLING GRADING, PILING WORK INCLUDING TESTING OF PILES AND OTHER ASSOCIATED WORKS ETC. OF FGD SYSTEM FOR 3x660 MW NPGCL NABINAGAR TPP, BIHAR. AS PER TENDER SPECIFICATION.	SCH 2 - PRICE BREAK UP	<u>IN FIGURES:-</u> <u>IN WORDS:-</u>
2.0	NON-SCHEDULE ITEM For items not covered in Schedule 2, quote % above or below or at par the CPWD Schedule of rates 2018		
a)	Rate of complete item	% above / % below/ at par of CPWD Rate Schedule 2018	
b)	Rate of supply of material at site only	% above / % below/ at par of CPWD Rate Schedule 2018	
c)	Rate for execution complete excluding supply of materials.	% above / % below/ at par of CPWD Rate Schedule 2018	
NOTE			
1.0	Bidder shall quote total price for SCH-2- Part only at SI No. 1 above. All other amounts / rates of each item of works in respective schedules / parts will be derived based on allocated percentages. As such, any uncalled figure/ amount noted at any other place / schedule of Volume-III will not be reckoned & will stand null & void.		
2.0	Bidder to note that total price at SI No. 1 above shall be considered for evaluation & awarding. As such grand total price should be complete in all respect for the full scope defined and considering all terms and conditions.		
3.0	Bidder's quoted total price of SCH-1 at SI. No 1 above, shall be apportioned into amount of various items of works based on allocated percentages against respective item, in respective schedules / parts. As such, bidder shall not indicate / quote any amount / rate in these schedules / parts and any amount / rate quoted against any item shall not be taken into cognizance / account and offer may be liable for rejection.		
4.0	Based on the itemwise percentage allocations, the amount for the individual items of the Bill of Quantity shall be arrived at. The rates of individual items shall be derived from the amount against each items and its quantity after rounding off to upto 2 decimal places. However, RA bill payment shall be done after rounding off the gross amount to two decimal points. Any adjustment, if required, due to such methodology, will be effected / adjusted in final bill.		
5.0	Bidders to note that this is an item rate contract. Payment shall be made for the actual quantities of work executed at the unit rate arrived at as per SI No.3 above.		
6.0	Any item as per scope of work, if not included in the price quoted above and shown separately will not be taken cognizance of and the offer shall be liable for rejection.		
7.0	Price format shall not be changed by bidder in any case and it may lead to cancellation of their offer.		
8.0	The quantity of items may vary during execution mainly due to actual requirement etc. The unit rates work out from the overall amount quoted & accepted by BHEL shall be considered and no separate unit rates shall be allowed. Unit rates shall be valid throughout the contract period.		
9.0	For payment of non schedule items, the rate shall be derived from CPWD Schedule - 2018.		

VOLUME-III PRICE SCHEDULE, REV-01				
JOB: LEVELLING GRADING, PILING WORK INCLUDING TESTING OF PILES AND OTHER ASSOCIATED WORKS ETC. OF FGD SYSTEM FOR 3X660 MW NPGCL NABINAGAR TPP, BIHAR.				
TENDER NO PSER:SCT:NBN-C2027:20				
SCH-2: PRICE BREAK UP				
ST NO.	ITEM DESCRIPTION	UNIT	TOTAL QTY	WEIGHTAGE
	400 REINFORCEMENT			
	REINFORCEMENT WORK: Reinforcement work including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling etc at all level as per specification, drawings and as directed by engineer - in - charge for the following:.(Reinforcement steel by BHEL)			
A402	Providing, straightening, cutting, bending, placing in position at all level, binding in position of steel reinforcements of high yield strength deformed TMT steel bars of grade Fe-500 having minimum elongation of 14.5 % or Fe-500D conforming to IS:1786 including cost of reinforcement steel, binding wire, labour, scaffolding, transportation to & from stores etc complete all as per specifications, drawings and as directed by Engineer.	MT	2,450	0.13889497
	2500 PILING			
	PILING WORK: Piling works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. as per specification, drawings and as directed by engineer - in - charge for the following:			
2501	Mobilisation of hydraulic rotary piling rigs and accessories capable of pile boring/drilling in all types of strata/ash etc., installing various size of bored cast in situ RCC piles to project site and demobilisation of the same after completion of piling works etc all complete.	EACH	4	0.04202829
2503	Mobilisation of conventional DMC/RMC piling rigs and accessories capable of pile boring/drilling in all types of strata/installing various size of bored cast in situ RCC piles to project site and demobilisation of the same after completion of piling works etc all complete.	EACH	2	0.00126162
A2504	Installation of Bored cast-in-situ RCC vertical pile as per IS 2911 (Part 1 Sec 2) with diameter and length as specified (length to be measured from pile cut-off level to the bottom of pile) using cement concrete grade M30 conforming to IS:456 with 20 mm nominal size stone aggregates with a minimum cement content of 400Kg per cum of concrete including providing all materials (but excluding reinforcement steel for which measurement/payment shall be made separately), boring/drilling in all types of soil, providing bentonite slurry and/or casing for stabilization of pile bore, flushing of pile bore, cleaning, providing plasticizer wherever required, breaking pile head to cut off level and exposing pile reinforcement for embedment in pile cap etc including empty boring from ground level to pile cutoff level etc all complete as per specification, drawing and as directed by the engineer-in-charge for the following. Reinforcement Steel and ready mix concrete will be provided by BHEL free of cost. Transportation of ready mix concrete from batching plant to site will be in bidder's scope.			
d	Pile with 600 mm diameter and 27m length below cut off level	EACH	2,287	0.54064333
Ae	Pile with 760 mm diameter and 28 m length below cut off level	EACH	460	0.14254540
A2505	Extra over ST. No. A2504 for pile length more than the specified length below cut off level for the following.			
d	For 600 mm diameter pile	RM	552	0.00999840
e	For 760 mm diameter pile	RM	200	0.00458864
A2506	Rebate on ST.No.2504 for pile length less than the specified length below cut off level for the following.			
d	For 600 mm diameter pile	RM	500	-0.00857635
e	For 760 mm diameter pile	RM	460	-0.01057762
A2511	Conducting initial load test upto a maximum test load of 3 times the safe load capacity on single pile as specified in accordance with IS 2911 Part-4 including preparation of pile head for testing, necessary excavation including suitable dewatering (if/as required), all arrangements of loading, unloading, test equipments/ accessories, jacks, recording of results, labour, submission of test report but excluding the cost of installation of pile (installation of pile shall be paid separately) etc. all complete as per specification, drawing and as directed by engineer in - charge for the following:			
a	For vertical compression test by cyclic load method			
iii	600 mm diameter pile	EACH	3	0.00836780
iv	760 mm diameter pile	EACH	2	0.00584816
b	For lateral load test			
iii	600 mm diameter pile	EACH	3	0.00613320
iv	760 mm diameter pile	EACH	2	0.00508983
c	For tension/uplift test			
iii	600 mm diameter pile	EACH	3	0.00444969
iv	760 mm diameter pile	EACH	2	0.00368689

VOLUME-III PRICE SCHEDULE, REV-01				
JOB: LEVELLING GRADING, PILING WORK INCLUDING TESTING OF PILES AND OTHER ASSOCIATED WORKS ETC. OF FGD SYSTEM FOR 3X660 MW NPGCL NABINAGAR TPP, BIHAR.				
TENDER NO PSER:SCT:NBN-C2027:20				
SCH-2: PRICE BREAK UP				
ST NO.	ITEM DESCRIPTION	UNIT	TOTAL QTY	WEIGHTAGE
2512	Conducting routine load test on single job pile as specified in accordance with IS 2911 (Part-4) including preparation of pile head for testing, necessary excavation, providing all arrangements of loading, unloading, test equipments/accessories, jacks, recording of results, labour, submission of test report etc but excluding the cost of installation of job pile complete as per specification, drawing and as directed by the engineer-in-charge for the following.			
a	For vertical compression test by maintained load method			
iii	600 mm diameter pile	EACH	14	0.03700561
iv	760 mm diameter pile	EACH	3	0.00988575
b	For lateral load test			
iii	600 mm diameter pile	EACH	14	0.02385135
iv	760 mm diameter pile	EACH	3	0.00636228
A2513	Carrying out pile integrity test on 600mm/760mm diameter pile including all arrangements for test, equipments/ accessories, materials, labour, submission of test report etc but excluding the cost of installation of job pile all complete as per specification and as directed by the engineer-in-charge.	EACH	2,750	0.02196373
2600	LEVELLING & GRADING: Levelling & grading works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. as per specification, drawings and as directed by engineer - in - charge.			
2601	Cutting of trees having girth more than 300 mm measured at a height of 1m above ground level including removal of roots, stacking the serviceable material like trunks, branches etc at specified area within the plant boundary and disposal of unserviceable parts/materials within a lead upto 1km etc all complete.			
a	300 mm upto 600 mm girth.	Nos	10	0.00001846
b	601 mm upto 1200 mm girth.	Nos	15	0.00012404
c	1200mm and above.	Nos	5	0.00019247
2602	Earth work in stripping of top soil upto a maximum depth of 0.30m below ground level so as to exclude all debris, grass, vegetation, bushes, trees having girth upto 300 mm including roots and organic materials etc for leveling and grading including dressing to specified levels & grades and compacting the graded/stripped surface by manual/mechanical means, disposal of stripped materials within a lead upto 1km etc all complete as per specification, drawing and as directed by the engineer-in-charge.	SQM	285	0.00002889
2603	Earth work in excavation upto any depth below ground level in all types of soil including moorum, ash which can be excavated by any means for grading including setting out, levelling, dewatering (wherever required), dressing the sides & bottom, levelling to grade, all lifts, ramming/compacting the excavated bottom/graded surface, stacking/disposal of surplus excavated materials within a lead upto 1km, spreading/levelling of disposed materials etc all complete as per specification, drawing and as directed by the engineer-in-charge.	CUM	240	0.00009604
2604	Earth work in excavation upto any depth below ground level in soft rock (rock without any recovery of excavated materials in the form of hard stone/boulder) including weathered rock which can be excavated by means of crow bar, pick axe, pneumatic rock breaker attachment with excavator machine etc (but does not require chiselling or blasting) for grading including setting out, levelling, dewatering (wherever required), dressing the sides & bottom, all lifts, ramming/compacting the excavated bottom, stacking/disposal of surplus excavated materials within a lead upto 1km, spreading/levelling of disposed materials etc all complete as per specification, drawing and as directed by the engineer-in-charge.	CUM	95	0.00007045
2610	Extra over ST No. 2601 to 2609 for carriage of unserviceable material/earth for every 500m or part thereof beyond an initial lead of 1km.			
a	Carriage for stacking/ backfilling of serviceable material/ earth	CUM	15	0.00000056
b	Carriage for disposal of serviceable/unserviceable material/ earth	CUM	15	0.00000056
2611	Earth work in filling upto any depth below ground level for grading to proper grade and level in layers not exceeding 300 mm loose thickness so as to achieve at least 95% maximum dry density as per IS-2720 (Part-VII) with approved borrowed soil (borrowed soil to be arranged by the bidder) and compacted as specified including supplying borrowowed soil, royalty/seignorage fee (if any), sorting, spreading, breaking clods, watering, ramming/compaction by manual/mechanical means, dressing, finishing to required lines, grades and slopes, tesing, all lead and lifts etc all complete as per specification, drawing and as directed by the engineer for the following.	CUM	115	0.00014235
2612	Providing and laying 225mm thick stone pitching including caulking with 1 cement: 4 sand mortar on the slopes of earth fill/cut with approved quality of rock fragments including materials, testing, necessary excavations if any, compaction etc all complete as per specification, drawing and as directed by the engineer.	CUM	145	0.00259080
2613	Providing and laying 300mm thick good quality dry stone pitching on the slopes of earth fill/cut with approved quality of rock fragments including materials, testing, necessary excavations if any, compaction etc all complete as per specification, drawing and as directed by the engineer.	CUM	190	0.00313230
2614	Concrete of grade M10 (1 part cement, 3 part sand, 6 parts of 40 mm graded aggregate by volume) as lean concrete, levelling course, mud mat under and around foundations/floors at any depth below finished floor level etc.	CUM	10	0.00015211
Total Price				1.00000000