


Leica LS Digital Levels

Data sheet

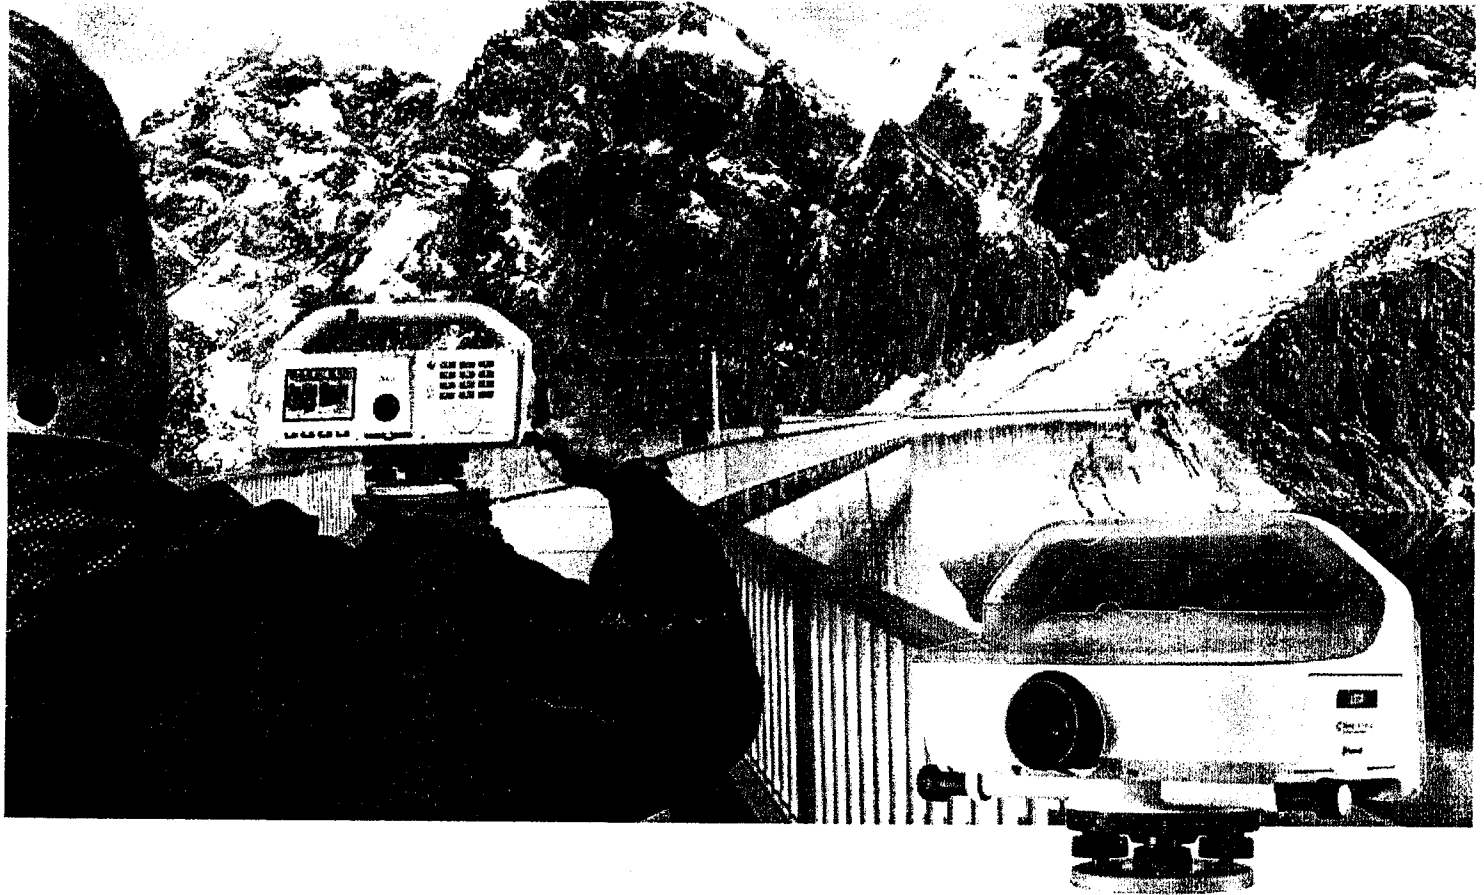

Precise hardware

Automated functions and industry-leading 0.2 mm accuracy to standard Invar staffs deliver unmatched reliability. Precision begins by using the electronic level bubble to set up instruments. After one button press, automatic tilt checks are made prior to each measurement. Integrated autofocus not only finds your target faster, it increases measurement accuracy by maximising contrast of the staff.



Infinitely bridging field to office

The comfortable field experience of Leica LS digital levels isn't finished in the field. After easily transferring your data to the office, Leica Infinity processes your results hassle-free back in the office. This intuitive software enables easy-to-understand displays of complex levelling data. Combine tables with graphics or even cross check project data in one window for an overall view of level lines, line calculations or adjustments.

ACC»


Customer care only a click away

Through Active Customer Care (ACC), a global network of experienced professionals is ready to expertly guide you through any challenge. Eliminate delays with superior technical service, and finish jobs faster and avoid costly site revisits with excellent consultancy support. Control your costs with a tailored Customer Care Package (CCP), giving you peace of mind you are covered anywhere, anytime.

Leica LS10 & LS15 Digital Levels



Leica LS10

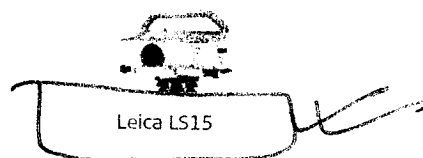

Leica LS15

HEIGHT MEASUREMENT

Accuracy¹ using standard Invar staff

0.3 mm

0.2 mm, 0.3 mm

Accuracy¹ using standard staff

1.0 mm

1.0 mm

DISTANCE MEASUREMENT

Accuracy²

15 mm at 30 m

15 mm at 30 m

MEASUREMENT RANGE

Minimum range

1.8 m

1.8 m

Maximum range⁴

110 m

110 m

Measurement time

Typically 2.5 sec

Typically 2.5 sec

AUTOFOCUS

Working range

X

1.8 m to infinity

Time to focus

X

Typically 4 sec

OVERVIEW CAMERA

Field of view

X

6° x 4.8° (7.7° diagonal)

Frame rate

X

Up to 20 frames per second

Focus

X

3 m to infinity

DIGITAL COMPASS

Accuracy⁵

X

3 gon / 2.7°

COMPENSATOR

Working range

± 10'

± 10'

Accuracy⁵

0.3"

0.3"

Magnetic field sensitivity⁶

≤ 1"

≤ 1"

INTERFACES

RS232 / USB

X

Bluetooth

✓

Mini USB

✓

DATA STORAGE

Internal memory

30,000 measurements

30,000 measurements

USB stick

✓

✓

GENERAL

Display

3.6 inches, QVGA, colour, touch

3.6 inches, QVGA, colour, touch

Telescope magnification

32 x

32 x

Minimum focusing distance

0.6 m

0.6 m

Electronic level bubble

X

Working range 0.07 gon / 0.063°
Accuracy⁶ 0.015 gon / 0.013°

Weight (including battery)

3.7 kg

3.9 kg

Internal battery / operating time

Exchangeable Lithium-Ion / 12 h

Exchangeable Lithium-Ion / 10 - 12 h

External power

X

12.8 V DC (10.5-18 V)

ENVIRONMENTAL SPECIFICATIONS

Working temperature range

-20 °C to +50 °C

-20 °C to +50 °C

Dust / Water (IEC 60529)

IP55

IP55

Humidity

95%, non-condensing

95%, non-condensing

1 - Standard deviation, 1 km, double run, ISO 17123-2, GPCL2 standard Invar staff or equivalent.

2 - Standard deviation, 1 km, double run, ISO 17123-2, GKNL4M standard staff or equivalent.

3 - Standard deviation, 500 ppm for up to 50 m, 1000 ppm for distances beyond 50 m.

4 - For standard staffs exceeding 3 m length, 60 m for Invar staffs.

5 - Line of Sight difference in constant magnetic field between 0 and ±400 µT.

6 - Standard deviation.

✓ Standard X Not Available

The Bluetooth® trademarks are owned by Bluetooth SIG, Inc.

Illustrations, descriptions and technical data are not binding. All rights reserved.

Printed in Switzerland. Copyright Leica Geosystems AG, Heerbrugg, Switzerland, 2015.

841877en - 10.15 - INT

Leica Geosystems AG
Heerbrugg, Switzerland

www.leica-geosystems.com

- when it has to be right

Leica
Geosystems