



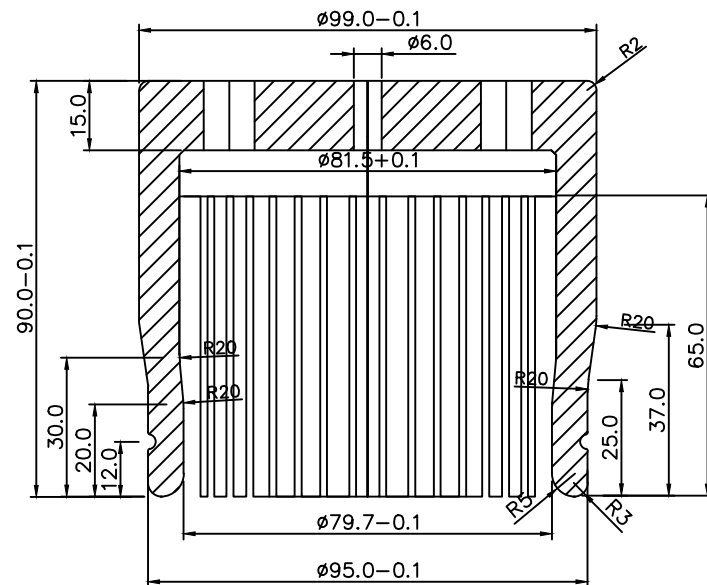

1. Component Shall be Silver plated of 10–12 micron thickness.
2. All the sharp edges shall be finished on 0.4X45°.

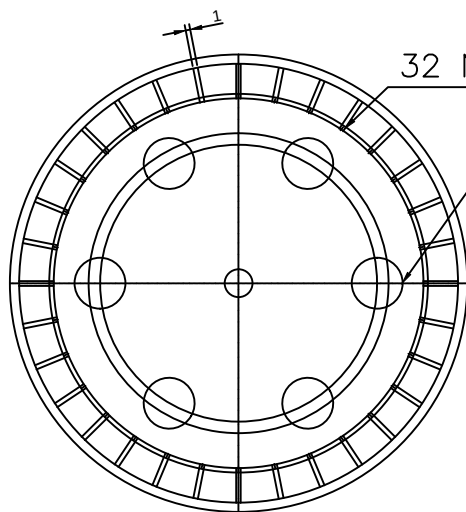

32 Nos. of slits, 1mm wide x 65 mm long

6 Nos of $\phi 11.0, 15$ mm deep Clear holes @PCD60.0

			01	BLOCK					CU—Cr.				01	
VAR.00	REMARKS	VAR NO.	ITEM NO.	DESCRIPTION	STD	DRAWING NO.	IT.NO.	MATL. CODE	A	C	UNIT	UNIT WT.	QTY.	GS
							VAR	MATL. SPECN.						

TYPE OF PRODUCT		NAME OF CUSTOMER						GSM 245		
		BHARAT HEAVY ELECTRICALS LTD.		HYDERABAD		DRN	NAME	SIGN.	DATE	NO. OF
						CKD	SA		20.06.14	VAR.
						APPD	MMRAO		20.06.14	
DEPT.	GRADE OF TOL. DIM.		SCALE	01	WEIGHT(KG)	REF. TO			ITEM NO.	NO. OF
CODE	C/M/F		NTS			RD DG 4 35 0519 1000			1	ITEMS
TITLE					CARD CODE	DRAWING NO.			REV.	
Finger Contact						RD DG 4 35 0519 1061				
						SHEET NO.			NO. OF SHEETS	

REV.	DATE	ALTERED	REV.	DATE	ALTERED
		CHECKED			CHECKED
ZONE		01	ZONE		