

**BANGLADESH-INDIA FRIENDSHIP
POWER COMPANY (PVT.) LIMITED,
BANGLADESH**

**2x660MW MAITREE SUPER THERMAL POWER
PROJECT, RAMPAL, BANGLADESH**

**TECHNICAL SPECIFICATION
FOR
FORK LIFT**

SPECIFICATION NO.: PE-TS-421-563-A301 Rev 0



**BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT
NOIDA, INDIA**

	PROJECT TITLE 2x660MW MAITREE SUPER THERMAL POWER PROJECT, RAMPAL, BANGLADESH	SPECIFICATION No: PE-TS-421-563-A301	
		PACKAGE: FORK LIFT	
		REV. 00	DATE: JAN 2020
		SHEET :	

CONTENTS

SECTION	TITLE	PAGE NO.
I	SPECIFIC TECHNICAL REQUIREMENT	
IA	SPECIFIC TECHNICAL REQUIREMENT (MECHANICAL)	1
	QUALITY ASSURANCE AND INSPECTION REQUIREMENT	9
	CUSTOMER SPECIFIC REQUIREMENT	14
IC	DATA SHEET A	279
	ANNEXURE-I : SPARES	283
	ANNEXURE-II : PAINTING SPECIFICATION	287
	ANNEXURE-III : DRAWINGS/ DOCUMENTS TO BE SUBMITTED AFTER AWARD OF CONTRACT	288
	ANNEXURE-IV : SEA WORTHY PACKING	291
	ANNEXURE-V : LIST OF MAINTENANCE TOOLS & TACKLES	349
	ANNEXURE-VI : LIST OF ERECTION & COMMISSIONING SPARES	350
III	DOCUMENTS TO BE SUBMITTED BY BIDDER	
IIIA	LIST OF DOCUMENTS TO BE SUBMITTED ALONG WITH BID	352
IIIB	COMPLIANCE CUM CONFIRMATION CERTIFICATE	353
IIIC	DEVIATION SCHEDULE	355
IIID	PRE BID CLARIFICATION SCHEDULE	356



**2x660MW MAITREE SUPER THERMAL
POWER PROJECT, RAMPAL, BANGLADESH**

SPECIFICATION No: PE-TS-421-563-A301

PACKAGE: FORK LIFT

SECTION-I

REV. 00

DATE: JAN 2020

SHEET :

SECTION-I

SPECIFIC TECHNICAL REQUIREMENT

SUB-SECTION IA

**SPECIFIC TECHNICAL REQUIREMENT
(MECHANICAL)**

SUB-SECTION IC

DATA SHEET A



**2x660MW MAITREE SUPER THERMAL
POWER PROJECT, RAMPAL, BANGLADESH**

SPECIFICATION No: PE-TS-421-563-A301

PACKAGE: FORK LIFT

SECTION-I

SUB-SECTION-IA

REV. 00

SHEET :

DATE: JAN 2020

SECTION-I

SPECIFIC TECHNICAL REQUIREMENT

SUB-SECTION IA

**SPECIFIC TECHNICAL REQUIREMENT
(MECHANICAL)**

	2x660MW MAITREE SUPER THERMAL POWER PROJECT, RAMPAL, BANGLADESH	SPECIFICATION No: PE-TS-421-563-A301	
		PACKAGE: FORK LIFT	
		SECTION-I	SUB-SECTION-IA
		REV. 00	
		SHEET :	DATE: JAN 2020

1.0 INTENT OF SPECIFICATION

- 1.1. The specification includes, but not limited to SUPPLY PART comprising of design (i.e. preparation and submission of drawing /documents including “As Built” drawings and O&M manuals), engineering, manufacture, fabrication, assembly, inspection / testing at vendor's & sub-vendor's works, painting, maintenance tools & tackles (as applicable), fill of lubricants & consumables till warranty period, along with spares for erection, startup and commissioning as required, initial spares, forwarding, sea-worthy packing, shipment and delivery as specified in BHEL NIT for project and package specified above complete with all accessories for the total scope defined as per BHEL NIT & tender technical specification, amendment & agreements till placement of order in line with drawings/ documents/ test procedures approved by BHEL/ Customer for FORK LIFT as per details in different sections / volumes of this specification.
- 1.2. The contractor shall be responsible for providing all material, equipment & services, which are required to fulfil the intent of ensuring operability, maintainability, reliability and complete safety of the complete work covered under this specification, irrespective of whether it has been specifically listed herein or not. Omission of specific reference to any component / accessory necessary for proper performance of the equipment shall not relieve the contractor of the responsibility of providing such facilities to complete the supply of FORK LIFT.
- 1.3. It is not the intent to specify herein all the details of design and manufacture. However, the equipment shall conform in all respects to high standards of design, engineering and workmanship and shall be capable of performing the required duties in a manner acceptable to purchaser who will interpret the meaning of drawings and specifications and shall be entitled to reject any work or material which in his judgement is not in full accordance herewith.
- 1.4. The extent of supply under the contract includes all items shown in the drawings, notwithstanding the fact that such items may have been omitted from the specification or schedules. Similarly, the extent of supply also includes all items mentioned in the specification and /or schedules, notwithstanding the fact that such items may have been omitted in the drawing.
- 1.5. The general term and conditions, instructions to tenderer and other attachment referred to elsewhere are made part of the tender specification. The equipment materials and works covered by this specification is subject to compliance to all attachments referred to in the specification. The bidder shall be responsible for and governed by all requirements stipulated herein.
- 1.6. While all efforts have been made to make the specification requirement complete & unambiguous, it shall be bidders' responsibility to ask for missing information, ensure completeness of specification, to bring out any contradictory / conflicting requirement in different sections of the specification and within a section itself to the notice of BHEL and to seek any clarification on specification requirement in the format enclosed under Sec-III of the specification within 10 days of receipt of technical specification. In absence of any such clarifications, in case of any contradictory requirement, the more stringent requirement as per interpretation of Purchaser/Customer shall prevail and shall be complied by the bidder without any commercial implication on account of the same. Further in case of any missing information in the specification not brought out by the prospective bidders as part of pre-bid clarification, the same shall be furnished by Purchaser/ Customer as and when brought to their notice either by the bidder or by purchaser/ customer themselves. However, such requirements shall be binding on the successful bidder without any commercial & delivery implication.

	<u>2x660MW MAITREE SUPER THERMAL POWER PROJECT, RAMPAL, BANGLADESH</u>	SPECIFICATION No: PE-TS-421-563-A301	
		PACKAGE: FORK LIFT	
		SECTION-I	SUB-SECTION-IA
		REV. 00	
		SHEET :	DATE: JAN 2020

- 1.7. The bidder's offer shall not carry any sections like clarification, interpretations and /or assumptions.
- 1.8. Deviations, if any, should be very clearly brought out clause by clause in the enclosed schedule; otherwise, it will be presumed that the vendor's offer is strictly in line with NIT specification. If there are no deviations from the tender document, bidder shall indicate 'NO DEVIATION' in the deviation schedule.
- 1.9. In the event of any conflict between the requirements of two clauses of this specification documents or requirements of different codes and standards specified, more stringent requirement as per the interpretation of the owner shall apply.
- 1.10. In case all above requirements are not complied with, the offer may be considered as incomplete and would become liable for rejection.
- 1.11. Unless specified otherwise, all through the specification, the word contractor shall have same meaning as successful bidder /vendor and Customer/ Purchaser/Employer will mean BHEL and /or Customer including their consultant as interpreted by BHEL in the relevant context.
- 1.12. Apart from specific design requirement, design of various systems/ Sub-systems and all equipment will also strictly meet the stipulations of part B0 of customer technical specification.

	2x660MW MAITREE SUPER THERMAL POWER PROJECT, RAMPAL, BANGLADESH	SPECIFICATION No: PE-TS-421-563-A301	
		PACKAGE: FORK LIFT	
		SECTION-I	SUB-SECTION-IA
		REV. 00	
		SHEET :	DATE: JAN 2020

A.0.0 SCOPE OF WORK

1.0.0 SUPPLIES

Equipment to be furnished by the bidder for FORK LIFT with accessories as per the details given in data sheet A. Any equipment / accessories not specified in the specification but required to make the fork lift unit complete and efficient shall also be under the bidder's scope of work.

1.1.1 Applicable codes and standards

(a) International standards like IEC or ISO shall be followed to the extent possible.

(b) Chinese Standards and codes are not allowed. In case bidder proposes any IS code, it shall be verified by reputed institutions like IIT that the proposed code is equivalent. Comparison report shall be established and provided to BHEL/Owner for information. Such report shall highlight the main items of the code, including material composition, material properties, design clauses and others as required. Report shall identify deviations of both codes and give justification for this deviation. No cost or time implication will be acceptable for any delay on account of non-acceptance by customer of justification for deviation by bidder. In case equivalence is not established, bidder has to provide material as per specified codes only.

(c) SA/IS 2062 (as per ASME standard) for structural steel material has been accepted by customer in addition to the specified codes/ standards mentioned above and elsewhere in the specification:

1.1.2 Compliance with this specification shall not relieve the bidder of the responsibility of furnishing material and workmanship to meet the specified working/duty conditions and relevant Standards/Codes.

1.1.3 Maintenance Tools and Tackles

A complete unused new set of special purpose tools, tackles and accessories along with detailed instructions and maintenance manual shall be supplied. Each tool and wrench shall be stamped so as to be identified easy for its use. The tools shall be supplied in steel toolbox and with a copy of instruction manual. The items supplied shall be of the best quality and specially protected against rusting in tropical climate.

Note: - The fork lift shall be supplied with one set of tool and tackles with O&M manual in the toolbox separately. Supplier to furnish list of tools& tackles along with the offer in the attached format at Annexure V

1.1.4 Erection and commissioning spares



**2x660MW MAITREE SUPER THERMAL
POWER PROJECT, RAMPAL, BANGLADESH**

SPECIFICATION No: PE-TS-421-563-A301

PACKAGE: FORK LIFT

SECTION-I

SUB-SECTION-IA

REV. 00

SHEET :

DATE: JAN 2020

One set of erection and commissioning spares, as deemed necessary by the bidder for commissioning of the fork lift shall be supplied along with the fork lift. List of these commissioning spares shall be furnished by the bidder along with their offer in the attached format at Annexure VI

1.1.5 Mandatory Spares – Not Applicable

1.1.6 Initial spares-

Bidder shall supply operation and maintenance spares as per list attached hereunder. Spares and quantities mentioned in this list are minimum. Any additional spare and/or quantities of the spares mentioned here, as deemed necessary by the bidder for proper operation & maintenance (preventive as well as break-down) of the fork lift shall be quoted by the bidder. List of the same shall be furnished by the bidder along with their offer.

FOR 3T DIESEL OPERATED FORK LIFT

Sl.no	Description	Total quantity required	Unit
i	Oil Filter	1	set
ii	Fuel Filter	1	set
iii	AIR FILTER ELEMENT	1	set
iv	Transmission filter	1	set
v	Pilot line filter element Hyd.	1	set
vi	Filter-Air Breather Hyd.	1	set
vii	Element Assy Fuel	1	set
viii	Element-Safety	1	set
ix	Element-Primary	1	set
x	Hydraulic oil filter	1	set
xi	Fan Belt	1	set
xii	Radiator Hose	1	set
xiii	FUEL LINE HOSE	1	set
xiv	STRAINER	1	set
xiii	Ignition kit	1	set
xiv	Any other		

FOR 5T DIESEL OPERATED FORK LIFT

i	Oil Filter	1	set
ii	Fuel Filter	1	set
iii	AIR FILTER ELEMENT	1	set
iv	Transmission filter	1	set
v	Pilot line filter element Hyd.	1	set
vi	Filter-Air Breather Hyd.	1	set
vii	Element Assy Fuel	1	set
viii	Element-Safety	1	set
ix	Element-Primary	1	set



**2x660MW MAITREE SUPER THERMAL
POWER PROJECT, RAMPAL, BANGLADESH**

SPECIFICATION No: PE-TS-421-563-A301

PACKAGE: FORK LIFT

SECTION-I

SUB-SECTION-IA

REV. 00

SHEET :

DATE: JAN 2020

x	Hydraulic oil filter	1	set
xi	Fan Belt	1	set
xii	Radiator Hose	1	set
xiii	FUEL LINE HOSE	1	set
xiv	STRAINER	1	set
xiii	Ignition kit	1	set
xiv	Any other		

FOR 10T DIESEL OPERATED FORK LIFT

i	Oil Filter	1	set
ii	Fuel Filter	1	set
iii	AIR FILTER ELEMENT	1	set
iv	Transmission filter	1	set
v	Pilot line filter element Hyd.	1	set
vi	Filter-Air Breather Hyd.	1	set
vii	Element Assy Fuel	1	set
viii	Element-Safety	1	set
ix	Element-Primary	1	set
x	Hydraulic oil filter	1	set
xi	Fan Belt	1	set
xii	Radiator Hose	1	set
xiii	FUEL LINE HOSE	1	set
xiv	STRAINER	1	set
xiii	Ignition kit	1	set
xiv	Any other		
xv	Any other		

FOR 5T BATTERY OPERATED FORK LIFT

i	Hydraulic oil filter	1	set
ii	Hydraulic Suction filter	1	set
iii	Ignition kit	1	set
iv	Any other		

1.1.7 Consumables

Bidder shall supply all the consumables including lubricating oil, engine oil, coolant etc. as required for standard lubrication/service schedule of the forklift, till the warranty period. For this purpose, bidder is advised to calculate at their end, the total requirement of consumables till the warranty period of the fork lift and quote the prices accordingly. Further, considering the fact that these consumables have certain shelf life, these consumables shall be supplied to site as and when required at site, as per lubrication/ service schedule and not with the first consignment. Thus, the fork lift along with accessories as per requirements of this tender, shall be supplied with only first fill of lubricants in first consignment and consumables shall be supplied as per the lubrication/service schedule of the fork lift in multiple consignments, till the warranty of the forklift.

	2x660MW MAITREE SUPER THERMAL POWER PROJECT, RAMPAL, BANGLADESH	SPECIFICATION No: PE-TS-421-563-A301	
		PACKAGE: FORK LIFT	
		SECTION-I	SUB-SECTION-IA
		REV. 00	
		SHEET :	DATE: JAN 2020

1.2.1 Services to be provided by the bidder

- a. Design, engineering with associated documentation
- b. Bidder's scope of work also includes arranging clearance from the concerned government body/authority as and when required
- c. Temporary registration and on road insurance as applicable will be responsibility of the bidder
- d. Permanent registration and 01 year insurance of the vehicle will be responsibility of bidder in the name of ultimate customer.

1.2.2 Document approval by customer under Approval category or information category shall not absolve the vendor of their contractual obligations of completing the work as per specification requirement. Any deviation from specified requirement shall be reported by the vendor in writing and require written approval. Unless any change in specified requirement has been brought out by the vendor during detail engineering in writing while submitting the document to customer for approval, approved document (with implicit deviation) will not be cited as a reason for not following the specification requirement. In case vendor submits revised drawing after approval of the corresponding drawing, any delay in approval of revised drawing shall be to vendor's account and shall not be used as a reason for extension in contract completion.

1.2.3 Packing, forwarding and transportation as per NIT conditions

1.3.0. Inspection and Testing

Refer "QUALITY ASSURANCE AND INSPECTION REQUIREMENT" section in section I, sub-section IA of technical specification

1.4.0. Drawing / design document for submission: Drawing/ design documents to be submitted as per list & submission schedule attached as Annexure-III, Section IA.

Any other design document/ drawing as required by customer/ BHEL shall be submitted by bidder during detail engineering without any implication.

1.5.0 Number of drawing and documents for submission

The number of prints / copies required for various drawing and documents are listed in Annexure-III, Section IA of this specification.

2.0.0. Deviations

If the bid submitted has got any deviation from the technical stipulations in the tender document, bidder shall tabulate the same appropriately in the "Schedule of Deviations- Cost of withdrawal" as attached along with General Condition of contracts (GCC) furnishing full particular of such deviations along with cost of withdrawal of deviation. Unpriced schedule of this schedule shall be submitted along with technical offer. Unpriced format should contain "QUOTED" / "NIL" / "NA" against each deviation. Deviations are to be furnished with mention to specific clause number. Reasons / explanations for such deviations shall be furnished. If there

	<u>2x660MW MAITREE SUPER THERMAL POWER PROJECT, RAMPAL, BANGLADESH</u>	SPECIFICATION No: PE-TS-421-563-A301	
		PACKAGE: FORK LIFT	
		SECTION-I	SUB-SECTION-IA
		REV. 00	
		SHEET :	DATE: JAN 2020

are no deviations from the tender document, bidder shall furnish NO DEVIATION CERTIFICATE regarding the same. Priced copy of same shall be submitted along with price schedule.

3 .0.0. Makes of Sub - Vendor items

List of makes of bought out items for fork lift shall be furnished by bidder to BHEL with complete vendor's details, in such manner that the proposals may be approved by customer (BIFPCL) prior to award of contract by BHEL. Bidder may suggest sub vendors to meet the International Standards as applicable for the manufacturing and supply of the respective component during detail engineering which shall be subject to customer approval. Non-approval of any make proposed by bidder shall not have any impact on manufacturing, delivery schedule and cost of the fork lift .

6.0.0 INFORMATION TO BE FURNISHED BY BIDDER ALONG WITH OFFER

6.1.0 Bidder shall submit only the documents indicated at Section III, Sub Section IIIA of this specification along with the bid.

7.0.0 Packing

Refer Annexure-IV, Section IA.



**2x660MW MAITREE SUPER THERMAL
POWER PROJECT, RAMPAL, BANGLADESH**

SPECIFICATION No: PE-TS-421-563-A301

PACKAGE: FORK LIFT

SECTION-I

SUB-SECTION-IA

REV. 00

SHEET :

DATE: JAN 2020

QUALITY ASSURANCE AND INSPECTION REQUIREMENT

 MANUFACTURER'S NAME & ADDRESS		MANUFACTURING QUALITY PLAN						PROJECT: 2X660 MW BIFPCL MAITREE			
		ITEM: FORK LIFT (BATTERY OPERATED)		REV		Rev 00		PACKAGE: FORK LIFT			
				DATE	PAGE	Page 1 of 2		BHEL DOC. NO:			
						CAPACITY: -					
S.NO.	Component & Operation	Characteristics	Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	Agency		Remark
1	2	3	4	5	6	7	8	9	10		11
1.0	RECEIVING INSPECTION										
1.1	STRUCTURAL MATERIAL OF CHASSIS – All steel heavy duty, welded construction for strength. - Plate & Section	Physical & Chemical	Major	Lab Analysis	Initial sample of each lot	As per Raw Material specification sheet		STC / Lab Report	✓	P/V	V
2.0	INCOMING MATERIAL										
2.1	Fabricated item (Over-head guard)	Physical verification and fitment check	Major	Visual & fitment check	Initial sample	As per drawing		V	✓	P	V
2.2	Hydraulic components- pumps, cylinders, hoses, valves etc.	Pressure test & Proof Pr. test	Major	Visual & Proof test	one per lot	OEM Spec. Sheet		STC	✓	P	V
2.3	Tyre	Batch No Specification date of Mfg.	Major	Visual	One per batch	OEM Spec. Sheet		V	✓	P	V
3	INPROCESS- INSPECTION										
3.1	Welding of Chassis frame assembly, Welding of Mast	Visual & NDT Inspection	Major	Visual & NDT	Initial Sample	NDT Procedure		TC	✓	P	V
3	FINAL INSPECTION										
3.1	Load testing	rated load at rated height	Critical	Measurement	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	V
3.2	Gradient test	Rated load at rated gradient	Critical	by measuring	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	V
3.3	Assembled forklift	Load test	Critical	Performance	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	V
3.4	Mast height	As per customer requirement	Critical	measurement	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	V

		LEGEND: CLASS A: Critical, B: Major, C: Minor		DOC. NO.:
		** M: MANUFACTURER / SUB-CONTRACTOR D: Records for Data Fold C: CONTRACTOR /NOMINATED INSPECTION AGENCY, ND: NDT LAB N: Customer R: Test / Dim Report, IR-Inspection Report INDICATE “P” PERFORMS, “W” WITNESS, MTC: Mfr’s Test Cert. “V” VERIFICATION, ALC: Approved Laboratory Certificate, QCR: Quality Control Report		
MANUFACTURER	CONTRACTOR			
NAME & SIGNATURE		NAME & SIGN OF APPROVING AUTHORITY & SEAL Page 10 of 356		

 MANUFACTURER'S NAME & ADDRESS		MANUFACTURING QUALITY PLAN						PROJECT: 2X660 MW BIFPCL MAITREE					
		ITEM: FORK LIFT (BATTERY OPERATED)			REV	Rev 00		PACKAGE: FORK LIFT					
		CAPACITY: -			DATE	BHEL DOC. NO:							
					PAGE	CONTRACTOR: BHEL							
S.NO.	Component & Operation	Characteristics	Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	Agency			Remark	
1	2	3	4	5	6	7	8	9	D	M	C	N	11
3.5	Mast tilting forward / backward	Angle as per specification sheet	Critical	Angle measurement	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	W	V	
3.6	Turning radius (outside)	measurement	Critical	measurement	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	W	V	
3.7	Ground Clearance	measurement	Critical	measurement	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	W	V	
3.8	Hydraulic System	Visual Inspection	Critical	Check Leakage	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	W	V	
3.9	Battery charger test	Performance	Critical		100%	As per mfg. specification		I.R.		P	W	V	
3.10	Accessories	All electrical / accessories and their working	Critical	Check proper working / operation	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P	W	V	
4	Painting	Examination – shade	Minor	Visual & measurement	100%	Appd GA drg				P	V	-	
		Dry Film Thickness	Major	Measurement	Sample					P	V	-	
5	Packing	Visual Inspection	Major	Visual		BOM / Elec. DODL Packing specification		I.R.	✓	P	V		

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

		MANUFACTURER'S NAME & ADDRESS			MANUFACTURING QUALITY PLAN				PROJECT: 2X660 MW BIFPCL MAITREE					
					ITEM: FORK LIFT (DIESEL OPERATED)		REV	Rev 00		PACKAGE: FORK LIFT				
					DATE				BHEL DOC. NO:					
					CAPACITY: -		PAGE		Page 1 of 2		CONTRACTOR: BHEL			
S.NO.	Component & Operation	Characteristics	Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	D	M	C	N	Agency	Remark
1	2	3	4	5	6	7	8	9					10	11
1.0 RECEIVING INSPECTION														
1.1	STRUCTURAL MATERIAL OF CHASSIS – All steel heavy duty, welded construction for strength. - Plate & Section	Physical & Chemical	Major	Lab Analysis	Initial sample of each lot	As per Raw Material specification sheet		STC / Lab Report	✓	P/V	V	V		
2.0 INCOMING MATERIAL														
2.1	Fabricated item (Over-head guard)	Physical verification and fitment check	Major	Visual & fitment check	Initial sample	As per drawing		V	✓	P	V	V		
2.2	Hydraulic Hoses, cylinders	Pressure test & Proof Pr. test	Major	Visual & Proof test	one per lot	OEM Spec. Sheet		STC	✓	P	V	V		
2.3	Hydraulic Pump	Specification sheet	Major	Visual	One per batch	OEM Spec. Sheet		STC	✓	P	V	V		
2.4	Tyre	Batch No Specification date of Mfg.	Major	Visual	One per batch	OEM Spec. Sheet		V	✓	P	V	V		
2.5	Engine	Technical specification & Features	Major	OEM Performance certificate	Initial sample	OEM Performance test sheet		STC	✓	P	V	V		
3 INPROCESS- INSPECTION														
3.1	Welding of Chassis frame assembly, Welding of Mast	Visual & NDT Inspection	Major	Visual & NDT	Initial Sample	NDT Procedure		TC	✓	P	V	V		
3 FINAL INSPECTION														
3.1	Load testing	rated load at rated height	Critical	Measurement	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P		W/V		
3.2	Gradient test	Rated load at rated gradient	Critical	by measuring	100%	Appd GA drg & As per Relevant STD		I.R.	✓	P		W/V		
				LEGEND: CLASS A: Critical, B: Major, C: Minor				DOC. NO.:						
				** M: MANUFACTURER / SUB-CONTRACTOR D: Records for Data Fold C: CONTRACTOR /NOMINATED INSPECTION AGENCY, ND: NDT LAB N: Customer R: Test / Dim Report, IR-Inspection Report INDICATE "P" PERFORMS, "W" WITNESS, MTC: Mfr's Test Cert. "V" VERIFICATION, ALC: Approved Laboratory Certificate, QCR: Quality Control Report										
MANUFACTURER NAME & SIGNATURE				CONTRACTOR				NAME & SIGN OF APPROVING AUTHORITY & SEAL						
								Page 12 of 356						

MANUFACTURER'S NAME & ADDRESS			MANUFACTURING QUALITY PLAN				PROJECT: 2X660 MW BIFPCL MAITREE			
			ITEM: FORK LIFT (DIESEL OPERATED)		REV	Rev 00	PACKAGE: FORK LIFT			
			CAPACITY: -		DATE		BHEL DOC. NO:			
					PAGE	Page 2 of 2	CONTRACTOR: BHEL			
			Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	Agency	Remark
S.NO.	Component & Operation	Characteristics	4	5	6	7	8	9	D M C N	
1	2	3							10	11
3.3	Assembled forklift	Load test	Critical	Performance	100%	Appd GA drg & As per Relevant STD		I.R.	✓ P W V	
3.4	Mast height	As per customer requirement	Critical	measure-ment	100%	Appd GA drg & As per Relevant STD		I.R.	✓ P W V	
3.5	Mast tilting forward / backward	Angle as per specification sheet	Critical	Angle meas-urement	100%	Appd GA drg & As per Relevant STD		I.R.	✓ P W V	
3.6	Turning radius (outside)	measurement	Critical	measure-ment	100%	Appd GA drg & As per Relevant STD		I.R.	✓ P W V	
3.7	Ground Clearance	measurement	Critical	measure-ment	100%	Appd GA drg & As per Relevant STD		I.R.	✓ P W V	
3.8	Hydraulic System	Visual Inspection	Critical	Check Leak-age	100%	Appd GA drg & As per Relevant STD		I.R.	✓ P W V	
3.9	Accessories	All electrical / accessories and their working	Critical	Check proper working / operation	100%	Appd GA drg & As per Relevant STD		I.R.	✓ P W V	
4	Painting	Examination – shade	Minor	Visual & measurement	100%	Appd GA drg			P V -	
		Dry Film Thickness	Major	Measurement	Sample				P V -	
5	Packing	Visual Inspection	Major	Visual		BOM / Elec. DODL Packing specification		I.R.	✓ P V	

				DOC. NO.:
		LEGEND: CLASS A: Critical, B: Major, C: Minor ** M: MANUFACTURER / SUB-CONTRACTOR D: Records for Data Fold C: CONTRACTOR /NOMINATED INSPECTION AGENCY, ND: NDT LAB N: Customer R: Test / Dim Report, IR-Inspection Report INDICATE "P" PERFORMS, "W" WITNESS, MTC: Mfr's Test Cert. "V" VERIFICATION, ALC: Approved Laboratory Certificate, QCR: Quality Control Report		
	CONTRACTOR		NAME & SIGN OF APPROVING AUTHORITY & SEAL Page 13 of 356	
	NAME & SIGNATURE			



**2x660MW MAITREE SUPER THERMAL
POWER PROJECT, RAMPAL, BANGLADESH**

SPECIFICATION No: PE-TS-421-563-A301

PACKAGE: FORK LIFT

SECTION-I

SUB-SECTION-IA

REV. 00

SHEET :

DATE: JAN 2020

CUSTOMER SPECIFICATION

BIFPCL SPECIFICATION


B0

General Technical Specification



A handwritten signature, possibly "Sg", written in ink.

000008



000008

B0. General Specification	0-1
B0.1 Subject of Specification	0-2
B0.2 General Plant Description	0-4
B0.2.1 General purpose of the plant	0-4
B0.2.2 General scope of supply	0-4
B0.2.3 Interface points	0-5
B0.2.4 Site conditions	0-9
B0.2.5 Configuration	0-16
B0.2.6 Layout	0-16
B0.2.7 Design requirements	0-17
B0.2.8 Fuel	0-19
B0.2.9 Output, heat rate and availability requirements	0-20
B0.2.9.1 Guarantee definitions	0-20
B0.2.9.2 Plant output	0-20
B0.2.9.3 Net heat rate	0-22
B0.2.9.4 Auxiliary power consumption, losses, own consumption,	0-23
B0.2.9.5 Plant availability	0-23
B0.2.9.6 Maintenance intervals	0-24
B0.2.10 Mode of operation	0-24
B0.2.11 Electrical network connection conditions	0-26
B0.2.11.1 Essential Electrical Requirements of the PPA	0-27
B0.2.11.2 Essential Requirements of Electricity Grid Code of the Bangladesh Energy Regulatory Commission	0-32
B0.2.12 Facility technical limits	0-43
B0.2.12.1 Unit start	0-43
B0.2.12.2 Despatch ramp rates	0-44
B0.2.13 Environmental impact requirements	0-44
B0.2.14 Provenness Criteria for Critical Equipments and Sub-system	0-46
B0.3 Supplies and Services	0-46
B0.3.1 General	0-46
B0.3.2 Scope of engineering services	0-47
B0.3.3 Deputation of Engineers during the Warranty Period	0-48
B0.3.4 Common equipment and services	0-48
B0.3.4.1 General	0-48

B0.3.4.2	Mechanical	0-49
B0.3.4.3	Substation control and monitoring system	0-51
B0.3.4.4	Electrical	0-51
B0.3.4.5	Instrumentation and Control	0-52
B0.3.4.6	Civil	0-53
B0.3.5	Packaging and transportation	0-54
B0.3.6	Erection, commissioning and testing	0-54
B0.3.7	Training	0-54
B0.3.8	Spare parts, tools, appliances, and consumables	0-55
B0.3.8.1	Spare parts	0-55
B0.3.8.2	Tools and appliances	0-55
B0.3.8.3	Consumables	0-57
B0.3.9	Documentation	0-57
B0.3.9.1	Documentation with tender	0-57
B0.3.9.2	Documentation after Award of Contract	0-61
B0.3.9.3	Data and simulation models	0-69
B0.3.9.4	Requirements for documentation	0-73
B0.3.9.5	Approval procedure for drawings and documents	0-74
B0.3.9.6	Quality control procedure	0-77
B0.3.10	Options and Alternatives	0-79
B0.3.10.1	Option 3.1: Absorber made of concrete (Optional Offer)	0-79
B0.3.10.2	Option 3.2: Combined Limestone System for Both Units (Optional Offer)	0-79
B0.3.10.3	Option 4.1: Open coal stock yard (Optional Offer)	0-80
B0.3.10.4	Option 4.2: Screw unloader (Optional Offer)	0-80
B0.3.10.5	Option 4.3: Open limestone yard (Optional Offer)	0-80
B0.4	Interfaces	0-80
B0.4.1	Battery limits of the plant	0-80
B0.4.2	Interfaces to electricity dispatcher	0-83
B0.4.2.1	Interface between the Power Plant and the NLDC	0-84
B0.4.2.2	Signal interface to NLDC for automatic generation control	0-84
B0.4.2.3	Interfaces between the 400/230kV substation and the NLDC	0-84
B0.4.2.4	Interfaces between the 400/230kV substation and the Power Plant	0-85

B0.4.2.5	Interface to power transmission system (PGCB - Power Grid Company of Bangladesh)	0-86
B0.4.3	Metering	0-86
B0.5	Technical Schedules	0-87
B0.6	General Technical Requirements	0-87
B0.6.1	General requirements	0-87
B0.6.2	Standards and codes	0-88
B0.6.3	Plant and equipment identification	0-91
B0.6.4	Marking and labelling	0-93
B0.6.5	Corrosion protection, coating and galvanizing	0-93
B0.6.6	Vibration	0-101
B0.6.7	Standardization of makes	0-103
B0.6.8	Accessibility	0-104
B0.6.9	Signs & colour code	0-104
B0.6.10	Units of measurement	0-107
B0.6.11	Ways, stairs, ladders, balustrades	0-108
B0.6.12	Hazardous areas, fire fighting & prevention systems	0-109
B0.6.13	Maintenance isolation	0-110
B0.6.14	Materials	0-110
B0.6.14.1	General material requirements	0-110
B0.6.14.2	Specific requirements for high temp./high pressure part materials	0-112
B0.6.15	Pre-service cleaning and protection of plant equipment	0-114
B0.6.16	Welding	0-115
B0.6.17	Mechanical equipment	0-118
B0.6.17.1	Pumps	0-118
B0.6.17.2	Piping and accessories	0-120
B0.6.17.3	Valves, steam traps, condensate drainers, safety valves	0-127
B0.6.17.4	Thermal insulation	0-131
B0.6.17.5	Vessels	0-134
B0.6.17.6	Heat exchangers	0-135
B0.6.17.7	Instrument and service air	0-136
B0.6.17.8	Cranes, hoists and lifts	0-136
B0.6.17.9	Cranes	0-136
B0.6.17.10	Hoists	0-138



B0.6.17.11	Lifts	0-140
B0.6.18	Electrical equipment and works	0-141
B0.6.18.1	Standards	0-141
B0.6.18.2	Voltage levels	0-141
B0.6.18.3	Insulation levels	0-142
B0.6.18.4	Installation conditions and protection class for electrical operational equipment and control and monitoring equipment	0-143
B0.6.18.5	Protective measures, earthing and lightning protection	0-144
B0.6.18.6	Earthing and lightning protection	0-147
B0.6.18.7	Technical conditions for high voltage motors	0-150
B0.6.18.8	Technical conditions for low voltage motors	0-154
B0.6.18.9	DC motors	0-156
B0.6.18.10	Actuator drives	0-156
B0.6.18.11	Frequency converters	0-156
B0.6.18.12	Cable and cable trays	0-160
B0.6.18.13	EMC measures	0-166
B0.6.18.14	Requirements for local cubicles and local housings for e.g. switchgear, control, measurement and signalling equipment	0-168
B0.6.18.15	Local control points and level control cabinets	0-170
B0.6.18.16	Terminal boxes and terminal cabinets	0-172
B0.6.19	Instrumentation and control equipment	0-172
B0.6.19.1	Main design criteria	0-172
B0.6.19.2	Distributed Digital Control, Monitoring and Information System (DDCMIS)	0-174
B0.6.19.3	Programmable logic controllers	0-174
B0.6.19.4	Control cubicles	0-176
B0.6.19.5	Racks, junction boxes	0-177
B0.6.19.6	Mimic diagrams	0-178
B0.6.19.7	Power supply and fusing	0-178
B0.6.19.8	Transmitters	0-179
B0.6.19.9	Temperature measurements	0-181
B0.6.19.10	Pressure measurements	0-183
B0.6.19.11	Flow measurements	0-184
B0.6.19.12	Level measurements	0-186
B0.6.19.13	Analysers and monitoring systems	0-187



B0.6.19.14	Electrical value measurements	0-193
B0.6.19.15	Control valves	0-193
B0.6.19.16	Actuators	0-195
B0.6.19.17	Solenoid valves	0-197
B0.6.19.18	Cabling and wiring	0-197
B0.6.19.19	Instrument and measuring impulse piping	0-199
B0.7	Inspection and Testing	0-199
B0.7.1	General	0-199
B0.7.2	Testing during manufacturing	0-201
B0.7.2.1	Material tests	0-201
B0.7.2.2	Manufacturing tests	0-205
B0.7.2.3	Mechanical equipment	0-212
B0.7.2.4	Electrical equipment	0-214
B0.7.2.5	Control and monitoring equipment	0-234
B0.7.3	Testing at site	0-236
B0.7.3.1	Civil works testing	0-236
B0.7.3.2	Erection tests	0-238
B0.7.3.3	Pre-commissioning tests	0-243
B0.7.3.4	Tests on Completion (Commissioning tests)	0-245
B0.7.4	Performance Tests	0-248
B0.7.5	Reliability test run	0-252
B0.8	Abbreviations	0-253
B0.9	Technical Schedules	0-258



INTENTIONALLY DELETED

B0.1 Subject of Specimen

The Joint Venture of Bangladesh-India Friendship Power Corporation (pvt) Ltd (BIFPCL) intends to construct a 2x 660 M^W_{e, gross} coal fired power plant (the Plant, the Maitree-STPP Project or the Project) in the district of Khulna for which BIFPCL firms as Employer, utilizing high availability, high efficiency steam cycle technology.

Two power units with steam generator, steam turbine generator and ancillary systems shall be proposed in a technology that enables the Contractor to guarantee a high net efficiency while achieving a high reliability (certain restrictions regarding the technology and the design parameters apply, as detailed herein). A second phase of the same capacity is foreseen as a future possibility, however, this Specification deals only with 2 x 660 MW_{e, gross} unless otherwise and expressly stated.

The Plant shall be based on supercritical technology. The main steam (MS) pressure at turbine inlet shall be in the range of 250 to 270 bar(g). The MS temperature at turbine inlet shall be in the range of 568 to 600 °C. The reheat steam (RH) temperature at turbine inlet shall be chosen by the Bidder/Contractor accordingly. That means, a proposed plant with a MS pressure at turbine inlet between 250 and 270 bar(g) and MS/RH temperature at turbine inlet upto 600°C/600° will be acceptable.

The Plant shall be suitable to be operated with the specified fuel. Only proven equipment and materials shall be used.

INTENTIONALLY DELETED

INTENTIONALLY DELETED



shall also include workshops, admin and staff amenities buildings and the likes unless expressly excluded in this specification.

B0.2 General Plant Description

B0.2.1 General purpose of the plant

INTENTIONALLY DELETED

- Turbine systems (refer to Section B2)

INTENTIONALLY DELETED

INTENTIONALLY DELETED

INTENTIONALLY DELETED

INTENTIONALLY DELETED



INTENTIONALLY DELETED

B0.2.4 Site conditions

The following information on local conditions is investigated or compiled by the Employer. The Contractor is hereby in no way relieved from his duties of carrying out all investigations required for satisfactory performance of his works. The Contractor shall perform his own Site visits and investigations, prior to Contract award in order to familiarize him with the existing conditions of the Site and the surrounding area.

Location, accessibility and present condition of the Site

The site for the Maitree-STPP Project is geographically located between 22° 37'0'' N to 22°34'30''N and 89°32'0''E to 89°34'5''E, approximately 14 km northeast of the Mongla Port and 14 km northwest of the Sundarbans, is infringed by the Passur and Moidara Rivers to the west and south east respectively. The project requires an area of approximately 500 acres.

The topographical survey indicates a natural ground level of +1.15 to + 1.35 meters above sea level. A severe cyclone in 2009 raised the level to 4.47 meters and it was decided to raise the Plant level to +5.00 meters.

Politically, the site is located in Rampal Upazila of the Bagherat District in the Rajnagar Union

Currently, the Site is accessible by boat only.

The nearest inland port is Mongla port at around 14km direct distance.

The proposed Khan Jahan Ali Airport is located at a distance of approximately 12 km from the project site.

INTENTIONALLY DELETED

INTENTIONALLY DELETED

Seismic zone

Attention shall be paid to seismic parameters. Related to soil type as identified to Soil Investigation Report, the effect of local soils on earthquake ground motion shall be determined.

For site class "S1" and "S", as expected for the Project, site specific studies shall be carried out to determine the design acceleration response spectrum. During field study minimum the following tests shall be executed:

- Seismic cross hole test; and
- Seismic refraction test.

Based on these results a site specific Response Spectra shall be established. Peak spectral acceleration shall be determined, but shall be not less than 0.12g, as mentioned in BNBC 2012, Table 2.5.2.

INTENTIONALLY DELETED

INTENTIONALLY DELETED

INTENTIONALLY DELETED

INTENTIONALLY DELETED

Design ambient conditions for Electrical Systems	
• Maximum design temperature (outdoor)	45°C
• Maximum daily average ambient shade temperature	38°C
• Maximum monthly average temperature (in the shade)	34.6°C
• Maximum annual average temperature (in the shade)	27.3°C
• Maximum design temperature of the electrical equipment installed indoors in air conditioned rooms	40°C
• Maximum design temperature of the electrical equipment installed indoors non in air conditioned rooms	45°C
• Minimum design temperature	0°C

INTENTIONALLY DELETED

INTENTIONALLY DELETED



000027

FICHTNER

000028

B0-14

INTENTIONALLY DELETED

Wind data

The project region is characterized by southerly winds from the Bay of Bengal during the Monsoon Season and north-westerly winds from the Himalayas during the Winter Season. During the Summer Season, the wind blows from south-southwest to north-northeast. The annual average wind speed amounts to 1.7 meter/second and the wind rose for the entire year is shown in Figure 5.5.

The wind load calculation for the buildings and structures shall be as per Bangladesh National Building Code -2012, Part 6, Chapter 2.4.

Basic wind Speed, V , shall be taken as 73 m/s, Three-second gust at 10 m above ground in exposure C, having a return period of 50 years.

Unquote



000028

000029

INTENTIONALLY DELETED

INTENTIONALLY DELETED

B0.2.7 Design requirements

This specification entails a functional technical specification (FTS). Hence, the Contractor is given as much freedom as possible in designing the main Plant components, characteristics and design data according to the Contractor's experiences and good engineering practice. One main acceptance requirement is that the Contractor's proposed design work shall be based on a very good reference basis. Prototype equipment and/or design features will not be accepted. All parts and equipment shall be arranged in such a manner as to facilitate surveillance by the operator and for ease maintenance, operation and control.

In the event of contradictions or discrepancies within B0 or between requirements in B0 and stipulations other parts of the Technical Specifications these shall be clarified by mutual consent before Contractor signature. In case contradictions have been not clarified the more stringent requirements shall apply.

The main design features (basic design reports, drawings, PFD, P&IDs, design data etc.) and the main vendors and subcontractors shall be subject to the approval by the Employer.

The main equipment/system subcontractors for: steam generator, steam turbine, main transformers, flue gas desulphurization plant shall be firm with the tender. Bidder's/Contractor's sub-suppliers and vendors shall



comply with Provennes Criteria as stipulated elsewhere in the bidding document.

The Employer has the right to refuse design features and vendors or subcontractors, if the Contractor cannot verify the reliability of the suggested design, vendor or subcontractor.

INTENTIONALLY DELETED

The Plant is expected to operate in base-load mode with high plant load factor. The design lifetime of the Plant shall be of not less than 30 years of operation or 200,000 full load operating hours, whichever is longer. The Plant and all its auxiliaries shall be designed to operate for the complete lifetime under the site conditions as described in **Section B0** and dedicated other part of this FTS.

All Plant equipment and material must be suitable for the range of ambient site conditions. In particular the saline atmosphere has to be considered.


The thermodynamic process of the Plant is to be optimized by the Contractor according to the proposed equipment. An economic optimal balance between investment, maintenance and operation expenses and Plant availability (planned and unplanned outages) shall be proposed.

The Contractor shall ensure a design of the Plant to achieve an average target availability of 90 % (regarding the definition and calculation of the availability please refer to Chapter B0.2.9.5). The Contractor shall accordingly provide for all systems:

- sufficient redundancies
- sufficient storage capacity
- appropriate adjustment of control parameters, and
- shall provide an appropriate spare part concept/proposal as further described under Chapter B0.3.7.




INTENTIONALLY DELETED

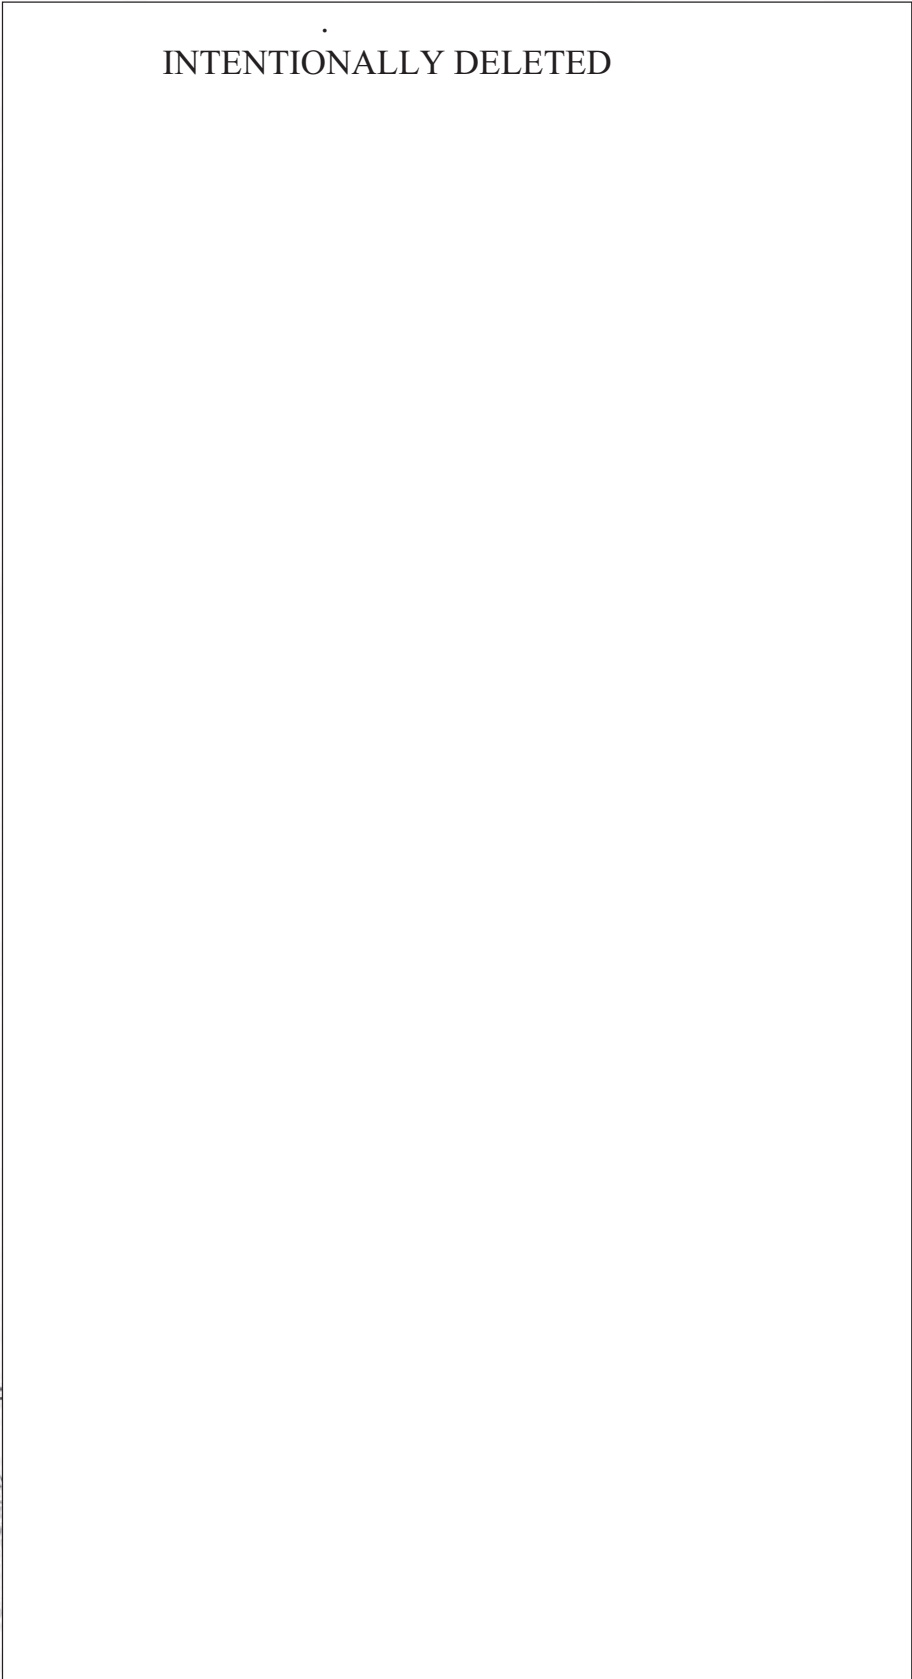

INTENTIONALLY DELETED


B0.2.8 F



INTENTIONALLY DELETED

B0.2.9

B0.2.9.1

B0.2.9.2



8140A01/FICHT-15702705-v5
BIFPCL/EPC-Main Plant/2015/1/

FICHTNER

000034

B0-20
000033

INTENTIONALLY DELETED

INTENTIONALLY DELETED

B0.2.



INTENTIONALLY DELETED



INTENTIONALLY DELETED

INTENTIONALLY DELETED

INTENTIONALLY DELETED

8140A01/FICHT-15702705-v5
BIFPGL/EPC-Main Plant/2015/1/

FICHTNER

~~000040~~


000039

B0-26

INTENTIONALLY DELETED

INTENTIONALLY DELETED

INTENTIONALLY DELETED



INTENTIONALLY DELETED


INTENTIONALLY DELETED

INTENTIONALLY DELETED

8140A01/FICHT-15702705-v5
BIFPCL/EPC-Main Plan/2015/1/

FICHTNER   B0-32
000045

INTENTIONALLY DELETED



INTENTIONALLY DELETED

8140A01/FICHT-15702705-v5
BIFPCL/EPC-Main Plan/2015/1/

FICHTNER

000048

000047

B0-34

INTENTIONALLY DELETED

B0.2.11.2.6 Monitoring of generation (Section 8.7)

For effective operation of the Transmission System, it is important that a **Generator's** declared availability is realistic and that any departures are continually fed back to the **Generator** to help effect improvement. The monitoring by the **NLDC** of Generating Unit output, and active and reactive reserve capacity, shall be carried out to evaluate the reliability and performance of plant.

The **NLDC** shall continuously monitor Generating Unit outputs and bus voltages (by SCADA). More stringent monitoring may be performed at any time, as detailed in the Testing Section, when there is reason to believe that a **Generator's** declared availability may not match the actual availability or declared output does not match the actual output.

Generators shall provide to the **NLDC** hourly generation summation outputs where no automatically transmitted metering or SCADA equipment exists.

The **Generator** shall provide other logged readings that the **NLDC** may reasonably require, for monitoring purposes where SCADA data is not available.

Generators shall submit data to **NLDC** as listed in Data Registration Section, termed as Frequency and Voltage Management.

B0.2.11.2.7 Contingency planning (Section 9)

Total System Blackout (Section 9.3.1)

NLDC shall instruct all relevant **Generators** having Power Stations with Black Start capability to commence their pre-planned Black Start procedure.

Remark: The Maitree-STPP shall **not** have Black Start capability.

Partial Transmission System Blackout (Section 9.3.2)

NLDC shall ensure with the **Licensee** and **Users** that security of the healthy part of the Transmission System is maintained.

NLDC and the **Licensee** shall gradually extend the healthy system to provide start-up power to appropriate Generating Units.

NLDC and the **Licensee** with close coordination with Distribution Utilities and **Generators** shall gradually restore demand to match generation as it becomes available.

All **Users** shall take care to ensure load generation balance is maintained all times under **NLDC's** direction.

FICHTNER

Special Consideration (Section 9.5)

During the restoration process following Transmission System blackout conditions, normal standards of voltage and frequency shall not apply.

B0.2.11.2.8 Protection (Section 12)**General Principals (Section 12.3)**

No item of electrical equipment shall be allowed to remain connected to the Transmission System unless it is covered by appropriate protection aimed at reliability, selectivity, speed and sensitivity. Guidelines mentioned in protection manuals may be kept in view.

All Users shall co-operate with the Licensee to ensure correct and appropriate settings of protection to achieve effective, discriminatory removal of faulty equipment within the time for target clearance specified in this Section.

Protection settings shall not be altered, or protection bypassed and/or disconnected without consultation and agreement of all affected Users. In the case where protection is bypassed and/or disconnected, by agreement, then the cause must be rectified and the protection restored to normal condition as quickly as possible. If agreement has not been reached the electrical equipment will be removed from service forthwith.

Fault Clearance Times (Section 12.5)

From a stability consideration the maximum fault clearance times for faults on any User's system directly connected to the Transmission System, or any faults on the Transmission System itself, are as follows:

Target Clearance Times:

- i. 400 kV : 100 ms
- ii. 230 kV : 160 ms
- iii. 132 kV : 160 ms.



Slower fault clearance times for faults on a Users system may be agreed to but only if, in the Licensee's opinion, system conditions allow this.

Generator Requirements (Section 12.6)

All Generating Units and all associated electrical equipment of the Generator connected to the Transmission System shall be protected by adequate and coordinated protection so that the Transmission System does not suffer due to any disturbance originating from the Generating Unit.

In the event of failure of the protection systems provided to meet the fault requirements detailed above, backup protection shall be provided by the Generator with a fault clearance time not slower than 400ms for faults on the Generating Unit's HV connections. The protection shall also cover EHV lines and transformers to the standards as for the Transmission System and

circuit breaker fail, pole slipping, loss of excitation, power system stabilizer and negative phase sequence tripping.

Transmission Line Requirements (Section 12.7/12.7.1/12.7.3)
Every 400 kV Line and 230 kV Line taking off from a Power Station or a substation shall have main protection and backup protection as mentioned below. The **Licensee** shall notify **Users** of any changes in its policy on protection from time to time.

- Two distance protections plus directional earth-fault protection (in directional comparison scheme) shall be provided as the Main-1 and Main-2 protection respectively.
- One stand alone directional 3-phase or 2-phase over-current relay and one directional earth-fault relay shall provide the backup protection.
- Three pole and/or single pole single shot auto-reclosing equipment shall be fitted, as appropriate, as considered by the licensee. All auto-reclosing equipment will be made inoperative for three phase trip-out and/or back-up protection operation.
- Both distance and directional earth-fault functions shall have compatible communication aided transfer trip scheme.

For short transmission lines Line Differential Protection along with backup Directional normal, Directional time-lag and/or Non-Directional Over-current and Earth-fault protection shall be provided as an appropriate protection scheme.

Relay Panels for the protection of lines of the **Licensee** taking off from a Power Station shall be owned and maintained by the **Licensee**. **Generators** shall provide space, connection facility and access to the **Licensee** for such purpose.

The **Generator** shall ensure that all common facilities needed for installing required protective relaying are made available to the **Licensee**.

Transformer Requirements - Generating Station/Transmission System (Section 12.9.1)

All windings of auto-transformers and power transformers of EHV class shall be protected by differential relays and REF relays as main protection. In addition there shall be one backup time lag 3-phase Over-current and Earth-fault protection relay. For parallel operation such backup protection shall have directional feature. For protection against heavy short circuits, the Over-current and Earth-fault relays should incorporate a high set instantaneous element. In addition to electrical protection, gas operated relays, winding temperature protection and oil temperature protection shall be provided. Over-voltage, thermal overload and over-fluxing protection should also be provided.



8140A01/FICHT-15702705-v5
 BIFPCL/EPC-Main Plan/2015/1/

FICHTNER



000052

BO-38

000051

Substation Busbar and Fire Protection (Section 12.10.1/12.10.2)

All Users shall provide adequate main and backup bus zone protection incorporated with Local Breaker Backup (LBB) or Breaker Fail Protection (BFP) for busbars in all 400 kV, 230 kV and 132 kV class substations.

Adequate precautions shall be taken and protection shall be provided against fire hazards to all Apparatus of the Users conforming to relevant Bangladesh Standard Specification and/or provisions in the Electricity Rules, 1937 and amendments thereof and other standard engineering practices.

Data Requirements (Section 12.11)

Users shall provide the Licensee with data for this Section as specified in the Data Registration Section.

B0.2.11.2.9 Testing (Section 14)**Introduction (Section 14.1)**

This Section specifies the responsibilities and procedures for arranging and carrying out Tests which have (or may have) an effect on the Transmission System or the Generator's or Distributor's systems.

Objective (Section 14.2)

The objective of the Section are to establish whether Generating Units can operate within their Generation Schedule and Dispatch parameters as registered under the Data Registration Section and that the Generator and Distributor comply with the Connection Section. It shall also establish whether each Generating Unit's declared availability capacity is as declared and that the requirements of the provisions of frequency, voltage management and reserve capability are met in accordance with the provisions of the Grid Code.

B0.2.11.2.10 Performance standards for transmission (Section 17)**Purpose and Scope (Section 17.1.1/17.1.2)**

Purpose:

- a) To ensure the quality of electric power in the Grid.
- b) To ensure that the Grid will be operated in a safe and efficient manner and with a high degree of reliability; and
- c) To specify safety standards for the protection of personnel in the work environment

Scope of Application:

This Chapter applies to all Grid Users including:

- a) the Licensee
- b) the System Operator/ NLDC
- c) generators



- d) distribution utilities, and
- e) any other entity (e.g. owners of HVDC converter, large furnaces, etc.) with a User System connected to the Grid.

Power Quality Standards (Section 17.2)

Power Quality Problems (Section 17.2.1)

For the purpose of this Article, Power Quality shall be defined as the quality of the voltage, including its frequency and the resulting current that are measured in the Grid during normal conditions.

A Power Quality problem exists when at least one of the following conditions is present and significantly affects the normal operation of the System:

- a) The System Frequency has deviated from the nominal value of 50 Hz.
- b) Voltage magnitudes are outside their allowable range of variation.
- c) Harmonic Frequencies are present in the System
- d) There is imbalance in the magnitude of the phase voltages.
- e) The phase displacement between the voltages is not equal to 120 degrees.
- f) Voltage Fluctuations cause Flicker that is outside the allowable Flicker Severity limits, or
- g) High-frequency Over-voltages are present in the Grid.

Frequency Variations (Section 17.2.2)


The nominal fundamental frequency shall be 50 Hz. The control of System frequency shall be the responsibility of the System Operator. The System Operator shall maintain the fundamental frequency within the limits of 49.0 Hz and 51.0 Hz during normal conditions.

Voltage Variations Section 17.2.3)

For the purpose of this Section, Voltage Variation shall be defined as the deviation of the root-mean-square (RMS) value of the voltage from its nominal value, expressed in percent. Voltage Variation will either be of short duration or long duration.

A Short Duration Voltage Variation shall be defined as a variation of the RMS value of the voltage from nominal voltage for a time greater than one-half cycle of the power frequency but not exceeding one minute. A Short Duration Voltage Variation is a Voltage Swell if the RMS value of the voltage increases to between 110 percent and 180 percent of the nominal value. A Short Duration Voltage Variation is a Voltage Sag (or Voltage Dip) if the RMS value of the voltage decreases to between 10 percent and 90 percent of the nominal value.

A Long Duration Voltage Variation shall be defined as a variation of the RMS value of the voltage from nominal voltage for a time greater than one minute. A Long Duration Voltage Variation is an Under-voltage if the RMS value of the voltage is less than or equal to 90 percent of the nominal voltage. A Long Duration Voltage Variation is an Overvoltage if the RMS



value of the voltage is greater than or equal to 110 percent of the nominal value.

The Grid Owner and the System Operator shall ensure that the Long Duration Voltage Variations result in RMS values of the voltages that are greater than 95 percent but less than 105 percent of the nominal voltage at any Connection Point during normal conditions.

Harmonics (Section 17.2.4)

For the purpose of this Section, Harmonics shall be defined as sinusoidal voltages and currents having frequencies that are integral multiples of the fundamental frequency. The Total Harmonic Distortion (THD) shall be defined as the ratio of the RMS value of the harmonic content to the RMS value of the fundamental quantity, expressed in percent.

The Total Demand Distortion (TDD) shall be defined as the ratio of the RMS value of the harmonic content to the RMS value of the rated or maximum fundamental quantity, expressed in percent. The Total Harmonic Distortion of the voltage and the Total Demand Distortion of the current at any Connection Point shall not exceed the limits given in Tables 17-1 and 17-2, respectively.

Harmonic Voltage Distortion

Voltage Level	THD*	Individual	
		Odd	Even
400 kV	5%	1.0%	0.5%
132-230 kV	2.5%	1.5%	1.0%
66 kV	3.0%	2.0%	2.0%

* Total Harmonic Distortion

Table 17-1: Maximum Harmonic Distortion Factor


Harmonic Current Distortion

Voltage Level	TDD*	Individual	
		Odd	Even
400 kV	1.5%	1.0%	0.5%
132-230 kV	2.5%	2.0%	0.5%
66 kV	5.0%	4.0%	1.0%

* Total Demand Distortion

Table 17-2: Maximum Harmonic Distortion

T.H.D of the line-to-line terminal voltage for the Generator shall be as per latest IEC 60034-3 (clause 9.11.2 - Limits (Total Harmonic Distortion (THD) for synchronous machines) will be accepted. As per this clause of IEC, it shall be limited to 5%. However, at the 400 kV and 230 kV grid connection points the requirements of the specification Section B0.2.11.2.10 shall apply.



Voltage Unbalance (Section 17.2.5)

For the purpose of this Section, the Negative Sequence Unbalance Factor shall be defined as the ratio of the magnitude of the negative sequence component of the voltages to the magnitude of the positive sequence component of the voltages, expressed in percent. For the purpose of this section, the Zero Sequence Unbalance Factor shall be defined as the ratio of the magnitude of the zero sequence components of the voltages to the magnitude of the positive sequence component of the voltages, expressed in percent. The maximum Negative Sequence Unbalance Factor at the Connection Point of any User shall not exceed one (1) percent during normal operating conditions.

The maximum Zero Sequence Unbalance Factor at the Connection Point of any User shall not exceed one (1) percent during normal operating conditions.

Voltage Fluctuation and Flicker Severity (Section 17.2.6)

For the purpose of this Section, Voltage Fluctuations shall be defined as systematic variations of the voltage envelope or random amplitude changes where the RMS value of the voltage is between 90 percent and 110 percent of the nominal voltage. For the purpose of this Section, Flicker shall be defined as the impression of unsteadiness of visual sensation induced by a light stimulus whose luminance or spectral distribution fluctuates with time.

In the assessment of the disturbance caused by a Flicker source with a short duty cycle, the Short Term Flicker Severity shall be computed over a 10-minute period. In the assessment of the disturbance caused by a Flicker source with a long and variable duty cycle, the Long Term Flicker Severity shall be derived from the Short Term Flicker Severity levels.


The Voltage Fluctuation at any Connection Point with a fluctuating demand shall not exceed one percent (1%) of the nominal voltage for every step change, which may occur repetitively. Any large Voltage Fluctuation other than a step change may be allowed up to a level of three percent (3%) provided that this does not constitute a risk to the Grid or to the System of any User. The Flicker Severity at any Connection Point in the Grid shall not exceed the values given in Table 17-3.

	Short Term	Long Term
132 kV and above	0.8 unit	0.6 unit
below 132 kV	1.0 unit	0.8 unit

Table 17-3: Maximum Flicker Severity

Transient Voltage Variations (Section 17.2.7)

For the purpose of this Section, Transient Voltages shall be defined as the high-frequency Over-voltages that are generally shorter in duration compared to the Short Duration Voltage Variations. Infrequent short-duration peaks may be permitted to exceed the levels specified in Section 17.2.4 for harmonic distortions provided that such increases do not



compromise service to other End-users or cause damage to any Grid equipment. Infrequent short-duration peaks with a maximum value of two (2) percent may be permitted for Voltage Unbalance, subject to the terms of the Connection Agreement or Amended Connection Agreement.

B0.2.11.2.11 House load operation (not requested by the Grid Code of Bangladesh)

Each Unit shall successfully go to house load operation in the event of disconnection or complete isolation of such Unit from the Grid. Each Unit shall be capable of performing house load operation up to a maximum of 2 hours. A Unit that has achieved house load operation shall not be shut down without the prior consent of the NLDC.

1. Within such time, each Unit on house load operation shall be ready to be resynchronized to the Grid System and able to increase output in the usual manner.
2. In the event the Grid System is not energized, each Unit on house load operation shall have the capability to energize a dead bus and to start the other Unit, when instructed by the NLDC. Subsequently, upon instruction by the NLDC, such Unit shall be able to increase output in the usual manner.

B0.2.12 Facility technical limits

The following sections describe the minimum requirements regarding the facility.

B0.2.12.1 Unit start

The facility shall be able to achieve the following operating levels within the same period (in minutes) specified in the following table.

Conditions	Boiler firing to turbine start	Steam turbine start to synchronous	Notice to start to steam turbine synchronous	Synchronous to full load	Total
Cold start after more than 48 hrs outage	TBD	TBD	12 hours	TBD	TBD
Warm start after 8 to 48 hrs shutdown	TBD	TBD	4 hours	TBD	TBD
Hot start after 8 hrs shutdown	TBD	TBD	3 hours	TBD	TBD

Table B0-3: Required start-up times (minutes)¹

¹ To be determined by the Tenderer



000057

000056

B0.2.12.2 Despatch ramp rates

Ramp rates of 3%/min to 5%/min are expected for the Power Plant when operating between 30% and 100% BMCR. Ramp rates of less than 5%/min are subject to Employer's approval.

The facility shall be able to achieve the following despatch ramp rates as specified in the following table:

Despatch ramp rates		(Excluding Pulverizer changing over time)	
		Loading (MW)	Ramp rates (MW/min)
Cold start	(0 to 7%)	0 – 42	TBD
	(7 to 30%)	42 – 180	TBD
	(30 to 50%)	180 – 300	TBD
	(50 to 75%)	300 – 450	TBD
	(75 to 100%)	450 – 660	TBD
Warm start	(0 to 7%)	0 – 42	TBD
	(7 to 30%)	42 – 180	TBD
	(30 to 50%)	180 – 300	TBD
	(50 to 75%)	300 – 450	TBD
	(75 to 100%)	450 – 660	TBD
Hot start	(0 to 7%)	0 – 42	TBD
	(7 to 30%)	42 – 180	TBD
	(30 to 50%)	180 – 300	TBD
	(50 to 75%)	300 – 450	TBD
	(75 to 100%)	450 – 660	TBD

Despatch ramp rates (per Unit)²

B0.2.13 Environmental impact requirements

Air pollution

The permissible exhaust gas emissions shall comply with the stipulations of the generating license granted. Compliance for the following pollutants shall be guaranteed and proved:

Emission	Unit	Maximum Threshold
Total PM	mg/Nm ³	50
Sulphur dioxide (SO ₂)	mg/Nm ³	200
Nitrogen oxide (NO _x)	mg/Nm ³	510

Table B0-5: Emission limits

Note:

- NO_x refers to oxides of nitrogen, referenced to NO₂.

Reference conditions for NO_x, SO₂, and particulates are 6 % O₂, dry (i.e. zero moisture), 0 °C and 1013 mbar atmospheric pressure, that means, unit for emissions is mg/Nm³

² To be determined by the Tenderer



000058

000007

The stack height shall follow the requirements of the Environment Conservation Rules, 1997 of Bangladesh.

Water pollution

Permissible emission limits for aqueous discharges into the river via the Plant Water Discharge System shall comply with the Waste Water Effluent Standards, see Technical Schedule of **Section B0** and IFC EHSG - TPP - Table 5 - Effluent Guidelines. If there are differences in effluent limits in the two guidelines the more stringent limit should be applied. But limit of TDS with 2100 ppm shall not be followed.

The findings of the Environmental Impact Assessment (EIA) shall be used for Plant design.

Other waste water which is not allowed to be discharged to the requirements waste water treatment plant will have to be disposed externally.

Soil contamination

The Plant should be designed, operated and maintained in such a way to prevent any soil contamination by oil and chemical spillage during subsequent operation and maintenance of the Plant.

Permissible noise levels

The Plant shall be designed and constructed inter alia in accordance with IFC Environmental, Health and Safety Guideline Thermal Power Plants (EHSG-TPP) to reduce the operating noise level as much as possible. No individual within the boundary of the Site shall be exposed to a noise level exceeding the limits stated in the EHSG-TPP and "The Sound Pollution (Control) Rules, 2006".

Far field noise under normal operation of the Plant measured along the Site boundary of the Plant towards the Township shall not exceed 50 dB(A) during daytime and 40 dB(A) during night-time.

For any other point of the Site boundary of the Plant the noise pressure level shall not exceed 60 dB(A) during daytime and 50 dB(A) during night-time. Day time is defined from 6:00 am to 9:00 pm. Night time is defined from 9:00 pm to 6:00 am.

During the engineering phase the Contractor shall award an independent Third Party to conduct noise propagation calculation to prove that the permissible noise levels at the Plant boundary are met.

In addition the statutory requirements of Bangladesh shall be followed as far as stricter as the other standards, such as EHSG-TPP.

Furthermore the following maximum noise pressure levels shall be not exceeded:

dB(A)



- At 1 m horizontal distance from equipment/enclosures and 1.5 m above operating floor 85
- Within turbine building 90 (Note 1 & 2)
- Steam generator 90 (Note 1)
- Within central control rooms in power plants 55.

Notes:

1. At normal operation
2. Generally at maximum 88 dB(A), exceptions are the turbine stop valve and control valves 95 dB(A) and turbine drive boiler feed pumps 97 dB(A).
3. Noise level from non continuous operating valves (like pressure control valve, water separator drain control valve, etc.) shall be limited to 90 dB(A).
4. The noise level for safety valves including ERV shall be limited to 115dBA for the safety valves provided with silencer as per OSHA standard. Noise level around Mill will be 90 dBA.
5. Noise level at the boundary fence as specified must be complied with.

High noise areas (areas with noise levels >85 dB(A)), which require that personal noise protecting gear shall be used when working in such high noise areas, shall be marked.

Electromagnetic Field (EMF)

In accordance with the EHSG-TPP the occupational EMF exposure shall be prevented or minimized.

All technical measures and the required equipment necessary to fulfil the EHSG-TPP shall be provided by the Contractor. Inter alia areas with expected elevated EMF levels shall be identified and marked.

Fire and explosion, electrical and chemical hazards

In accordance with the EHSG-TPP all technical measures to prevent, minimize and control physical, electrical and chemical hazards shall be include in the Contractor's scope of services and supplies.

B0.2.14 Provenness Criteria for Critical Equipments and Sub-systems shall be as per Annexure-I of B0 (Refer Amendment no.05 to Bidding Documents).

B0.3 Supplies and Services**B0.3.1 General**

The scope of this specification covers all supplies and services required for meeting the purpose of the Plant, even if these are not expressly mentioned in the following.

The works include the following main components, where the detailed scope of supply is given in the corresponding Sections as listed below:

- **Section B1:** Steam generator plants
- **Section B2:** Steam turbine generator plants
- **Section B3:** Air and flue gas systems
- **Section B4:** Fuel and Ash handling system
- **Section B5:** Plant Water and Cooling Systems
- **Section B6:** Water treatment systems
- **Section B7:** Electrical works
- **Section B8:** Instrumentation and control works
- **Section B9:** Civil Works
- **Section B10:** Electrical Works 400/230 kV Substation
- **Section B11:** Jetty
- **Section B12:** Auxiliary plant systems

The corresponding Annexes and Attachments are contained in **Part C**.

The relevant costs of these supplies and services to be given in the price schedules are to be assigned corresponding to the individual items concerned for each of the sections. The costs of the common equipment and services have to be included in the corresponding Section prices.

B0.3.2 Scope of engineering services

The Engineering services refer to the complete specified Plant and covers following services:

- **Basic and detail engineering**

- **Permit engineering**

The Contractor shall actively participate in drawing-up of all required licensing applications.

All services shall be performed by the Contractor to affect the required permits to commence the works and operate the Plant, including but not limited to:

- preparation of all documents as required according to the pertinent laws
- clarifications with authorities
- participation in all clarification meetings
- construction permits
- boiler and pressure vessel approvals
- water/waste water permits
- operation permits
- fire fighting approvals
- and all other services as required.



Furthermore, all other required engineering and other services to meet the purpose of the Project and the agreed project time schedule shall be executed by the Contractor.

B0.3.3 Deputation of Engineers during the Warranty Period

At least seven (7) English speaking graduate engineers, (3 operation experts, 1 Turbine & auxiliary expert, 1 Boiler & auxiliary expert, 1 for I&C, 1 for Generator and Switchyard area expert), with adequate knowledge and at least fifteen years of relevant experience of pulverised coal fired power plant of 500 MW and above unit size including two years of relevant experience in power plant of same type and technology being offered here from the Contractor, shall be permanently at site during the Warranty Period that means two months prior to PAC of first unit of the Plant upto end of warranty period of second unit. They shall be competent to advise and lead the Employer's staff on all aspects of engineering, operation and maintenance.

B0.3.4 Common equipment and services

The following supplies and services are to be included in the corresponding Section prices:

B0.3.4.1 General

- Material and personnel costs for tests and inspections which are mandated in legislation

Employer/employer representative/TPA will be responsible for their respective expenses in connection with inspection, examination and testing.

- Material and personnel costs for site inspections
- Declaration of conformity with requirements from Bangladesh and markings for all machines
- Engineering design of complete supplied equipment including interface coordination
- All as-built documents (on data carriers; data formats as requested by the Employer)
- Quality control plan and safety plan
- Complete documentation as set out in the tender specification
- Operating manual (5 hardcopies and 3 electronic copies)
- Detailed operating and maintenance instructions/manual (5 hardcopies and 3 electronic copies)
- A maintenance program for all equipment of the Plant instructions (5 hardcopies and 3 electronic copies)



- For all documents softcopy format shall be searchable pdf, however in addition all drawings, diagrams like P&IDs shall be supplied in ACAD or other editable format, and all lists in Excel format.
- All insurances, such as, but not limited to:
 - transport insurance, incl. marine cargo insurance
 - installation all risks,
 - third party liability,
 - automobile liability,
 - M.V. Policy for: motor vehicles, private cars & commercial vehicles,
 - CPM policy for heavy construction equipment,
 - Workmen's Compensation,
 - Employer's liability,
 - Group personal insurance, for contractor's & subcontractor's employees.

B0.3.4.2 Mechanical

- All necessary pipelines, valves, actuators
- All required line warm-up systems
- All connection and adaptation works for-tie-in into general supply systems
- All necessary vents, drains and rinsing connections as well as tundishes with covers, as far as possible aggregated to common groups of on operating level
- All connection elements, screws, bolts, nuts, including gaskets and seals as necessary
- All temporary installations required for tie-in measures including post-weld heat treatment complete etc.
- All temporary pipework as required during connection measures
- Check of required existing structures, plant components and systems and their rehabilitation where they lie within the scope of supply, or definition of required measures in good time if they lie outside of the scope of supply
- All necessary support structures, hangers etc.
- All necessary base frames, mounting plates, grouted in parts, rag bolts, covers etc.
- All required steel parts embedded in concrete
- All couplings and coupling guards for electric motors and other drives
- All necessary lifting equipment and hoists (hooks and provisions for chain blocks to be provided for repair work where loads exceed 50 kg, hoists to be provided for repair work where loads exceed 200 kg, and electrical operated hoist for loads exceeding 2,500 kg)
- Required safety equipment, pressure relief valves etc.
- All thermal and noise insulation including cladding as well as any other noise attenuation measures
- Stairways, ladders, platforms, galleries and walkways to all plant components, including escape routes as necessary



- All necessary steel structures, stairs, ladders on platforms weather protection
- All required ventilation or air conditioning equipment for safe operation of mechanical and electrical equipment, to be supplied
- All necessary corrosion protection measures for plant components and equipment stored or mounted on site up to the time of reliability test run
- Complete primer and top coatings conforming to colour code, clarified with the Employer
- Necessary noise abatements measures
- All required freeze protection and electric trace heating for outdoor installations
- Complete labelling of all plant components according to the Employers system and in plain language
- All fire protection measures
- All necessary lubrication systems
- Initial lubricant filling and sufficient lubricants for commissioning and reliability test run, minimization of lubricant types by screening and coordination with the Employer
- Water and demineralised water for pre-commissioning and commissioning activities,
- Provision of all connections and temporary pipework for acid cleaning, steam purging of the live steam line and flushing / cleaning of systems as necessary
- Flushing of all other lines including disposal of the effluents; protection with wood and/or plastic at all instrumentation and appendages to be installed during construction
- All standard accessories and auxiliary equipment which normally form part of the scope of supplies
- All necessary tests, inspections and works acceptances as well as all certificates and reports of these
- Exchange of filter elements following reliability test run
- Removal of temporary strainers
- Valve trims for purging and subsequent exchange
- Removal of any unused material
- Scaffolding for all work above ground level
- Necessary connection points for on line condition-based monitoring equipment.



B0.3.4.3 Substation control and monitoring system

At least but not limited to:

- all field equipment such as bay control units, bay protection equipments (described under chapter "Substation Control and Monitoring System) to be installed at the substation. The field equipment for the substation shall be interconnected by separate IEC 61850 fiber optic station busses in ring configurations. (The use of an IEC 61850 optical fiber link is required for all connections of equipments which directly interact with the station bus (the switches). In the particular case where, for example, the IEDs are wired to the BCU and only the latter is connected to the station bus, electrical links (preferably IEC 61850) are allowed for wiring connection of the IEDs with the BCU but an IEC 61850 optical fiber link between BCU and switches is required.
- all equipment to control and monitor the auxiliary equipment of the substation connected to the SCMS by redundant fiber optic links
- common bay unit / station computers
- operator and engineering workstations with TFT monitors and printers to be installed at the substation control room
- all equipment necessary for the implementation of an OPC server/client architecture between the substation and the Power Plant control rooms in order to allow the supervision and monitoring of the substation from the Power Plant DCS facilities. The OPC-server configuration shall be redundant
- Maintenance / service laptop which shall also be used for protection and disturbance analysis by respective log-in.
- data communication gateway to the National Load Dispatch Center (NLDC),
- energy meters for active energy (kWh) with accuracy of 0.2 S and for reactive energy (kVarh) with an accuracy of 0.5 S for tariff metering shall be provided for each outgoing line.

B0.3.4.4 Electrical



- All necessary electrical drives
- Complete installation material, that is wiring, cabling and piping material, all needed fastenings, conduits, brackets and other supports
- All required junction boxes and cubicles
- All field control boxes
- All cubicles, junction boxes, marshalling racks, terminal boxes, etc.
- Complete labelling of electrical equipment (also inside of cabinets)
- Lightning protection
- Electrical earthing of the equipment
- Cable and cable trays
- All necessary cables and wires for power, AC and DC instrument transformers, control, measuring, signals, etc.



- All necessary number plates for identifying the cables (numbering code to be determined)
- All necessary fixing materials
- All necessary fire protection materials for making good the cable openings through walls and ceilings as well as between switchgear and control, measuring, recording and switchgear cubicles, operating panels and desks, etc.,
- All necessary plastic protecting tubes for the cable runs
- All necessary materials for laying the cables in the ground
- All necessary cable connections including compression cable lugs, fixing and clamping materials, etc.
- All necessary cable sealing ends and cable connecting sleeves including fixing materials
- All necessary compression connectors.

B0.3.4.5 Instrumentation and Control

- All necessary control systems and auxiliaries
- All measurements and field control loops (thermometers, pressure gauges, transmitters, sensors, analyzers, local regulating devices, etc.) as well as all instruments for reliability test and checks for the duration of the performance tests
- Other special instruments/ systems like acoustic steam leak detection system (ASLD), acoustic pyrometer, communication systems, ambient air quality monitoring system (AAQMS), effluent quality monitoring system (EQMS)
- Complete installation material, that is wiring, cabling and piping material, all needed fastenings, conduits, brackets and other supports
- All required junction boxes and cubicles
- All field control boxes
- All instruments mounted on instrumentation racks
- All cubicles, junction boxes, marshalling racks, terminal boxes, etc.
- Signal exchange between local control system and DCS as well with instruments/control systems of other lots
- Complete labelling of I&C-equipment (also inside of control cabinets)
- Lightning protection
- Electrical earthing of the equipment
- Clarification of all logic interconnections: sequence, interlocking, protection, safeguarding for coordinated operation/start-up/shut down of individual items of equipment
- Cable and cable trays
- All necessary cables and wires for power, AC and DC instrument transformers, control, measuring, signals, etc.
- All necessary number plates for identifying the cables (numbering code to be determined)
- All necessary fixing materials

- All necessary fire protection materials for making good the cable openings through walls and ceilings as well as between switchgear and control, measuring, recording and switchgear cubicles, operating panels and desks, etc.
- All necessary plastic protecting tubes for the cable runs
- All necessary materials for laying the cables in the ground
- All necessary cable connections including compression cable lugs, fixing and clamping materials, etc.
- All necessary cable sealing ends and cable connecting sleeves including fixing materials.

B0.3.4.6 Civil

- All necessary surveying works including all soil investigations required for safe and reliable design and construction
- Preparation of site, demolition works, removal of underground obstacles
- Earthworks, drainage, excavation and refilling works
- Piling of structures to prevent subsidence
- Concrete and reinforced concrete works, masonry and earthing
- Concreting of maintenance platforms and lay-down areas
- Water proofing works for pressing and non-pressing water
- Fire protection during construction
- Roofing; non asbestos
- Plumbing
- Facade works/glazing works; non asbestos
- Non-load bearing walls/installation partitions/dry construction works
- Metalwork and blacksmith work/raised flooring/doors and gates/sheet metal work
- Flooring work
- Fire protection with plumbing; fire protector
- Painting/varnishing
- Craneway works
- Room air conditioning systems, where required, e.g. control cubicle rooms, etc.
- Potable water, service water and waste water
- Housekeeping during construction
- Staff facilities during construction
- Transport of all dumping material to dump locations
- Performance and interpretation of soil bearing tests
- Temporary fencing of construction site
- Site offices for Employer and Employer's representatives
- The Contractor's site office
- Landscaping of areas required under this contract.



B0.3.5 Packaging and transportation

- Suitable packaging and transportation of the entire scope of supplies,
- free construction site, on-site transportation and temporary storage including inspections and, if necessary, ensuring the prerequisites for transportation
- Disposal of packing and transportation material
- Customs clearance
- Crane or hoisting facilities at seaport and site
- Transportation to site
- Unloading at site.

B0.3.6 Erection, commissioning and testing

- Complete erection of the scope of supply up to operational readiness: This includes mobilization and provision of the required supervisory staff, skilled and unskilled personnel, as well as of installation scaffolding, cranes, hoists, equipment and materials, personnel accommodation, prescribed tests and inspections.
- Commissioning and optimization of all plant components as well as conducting all necessary measurements.
- Supervision of erection, commissioning and Reliability Test Run of complete supplied equipment.
- All testing as specified.

B0.3.7 Training

The Contractor shall provide comprehensive training for Employer's engineering, operating and maintenance staff (Employer's staff) covering all aspects of the Power Plant equipment and systems and operation and maintenance.

The Contractor shall train, instruct and supervise the Employer's staff to an adequate standard of knowledge and capability for good trouble shooting, repair and of the plant equipment as well as to an adequate standard for safe and efficient commercial operation of the Plant.

The training shall at least include:

- ~~training at manufacturer's works during the assembly of the major plant items~~
- classroom and hands on training
- on the job training during erection, commissioning and reliability test run; and
- simulator training.

The Contractor shall submit the training plan for the classroom, on the job and simulator training including schedule, place, content of lectures etc. for



the Employer's approval no less than six (6) months in advance to the cold commissioning.

Post training assessment shall be carried out and documented. In case the results of the training are below the expectations, which have been agreed upon by both Contractor and Employer before training, the respective training modules shall be repeated in an improved way and the related cost for the repeated training shall be borne by the Contractor. In case the results are below expectations (to be agreed upon by both Contractor and Employer before training) the respective training modules shall be repeated in an improved way.

B0.3.8 Spare parts, tools, appliances, and consumables

B0.3.8.1 Spare parts

Reference is made to Amendment No 3 and Annexure I to Amendment No.3 (both already published on BIFPCL's Website).


B0.3.8.2 Tools and appliances

The following tools and appliances shall be supplied under this Contract for use by the Employer:

- a. two (2) sets of all special tools and gauges required for the operation and maintenance of the Plant
- b. one (1) set of special lifting and handling appliances required for the operation and maintenance of the Plant
- c. suitable storage bins/racks/shelves for the above.
- d. Standard tools according to the relevant Technical Schedules.



For I&C e.g. following special tools and gauges shall be provided (including but not limited): pressure calibrator, portable pressure source, calibration pressure pump, deadweight testers, precision pressure gauges, manometers, temperature baths/calibrator, multimeters, RTD simulator/tester, thermocouple calibrator precision source and simulation equipment, direct temperature indicating meter, standard pH-tester, multi function process calibrator, loop calibrator, voltage/current/temperature reference generator, intrinsic safe multifunction calibrator, depth gauge, feeler gauge, dial indicators, portable handheld tachometers, double channel digital storage oscilloscope, conductivity meter, electronic stethoscope, general purpose vibration meters, hand-held IR thermometers, humidity & moisture meters, hazardous and toxic leak detectors, field meters (leak and emission detectors), laser distance meters, US distance estimators, US handheld flow meters, US handheld level meters, portable sound level meter, anemometer, barometer, stop watch, standard technician tools etc.



One set of tool shall be handed over in new condition and one set shall be used by the Contractor for erection/commissioning.

Each tool or appliance is to be clearly marked with its size and/or purpose.

The tools and appliances supplied may have been used for erection and commissioning purposes by the Contractor, but shall be handed over in good working order.

Each set of tools and appliances under category (a) and (d) shall be suitably arranged in fitted boxes of mild steel construction, the number of boxes being determined in relation to the layout of the Plant and equipment in question. If the weight of any box and its contents should be such that it cannot conveniently be carried, it shall be supported on steerable rubber-tyred wheels.

Each cabinet and box shall be painted, fitted with a lock and clearly marked in white letters with the name of the item of equipment for which the tools and appliances contained are intended.

Suitable storage racks shall be provided for all portable lifting tackle in this contract.

Suitable lifting lugs, ears or ring bolts, or tapped holes for lifting rings shall be provided on all equipment items where the weight exceeds 15 kg.

All lifting tackle shall be stamped with a unique identification number and safe working load. A test certificate from an approved authority shall be supplied for each item of lifting tackle.


The Contractor shall provide a schedule of all lifting tackle and tools and appliances being supplied, for the approval of the Employer/Engineer.

The Contractor shall provide all runway beams, trolleys, lifting blocks, special slings etc. necessary for the safe and efficient handling and maintenance of the works. Particular attention shall be paid to high level equipment such as deaerators. Electrically operated hoists and runway trolleys shall be provided for all lifts in excess of 2.5 tons.

The tools and appliances with the appropriate storage racks, cabinets and boxes shall be handed over to the Employer at the time of taking over of the unit.

Where the Contract includes site erection, any special tools or appliances required solely for erection shall be provided by the Contractor for his own use and shall remain the property of the Contractor.

One set of tools shall be handed over in new condition and one set shall be used by the Bidder/Contractor for erection/commissioning.



For handling of the generator stator the following alternative is also acceptable: Tandem/combined operation of two turbine hall EOT cranes for which the necessary arrangements shall be provided. In such case the combined capacity of two EOT cranes shall not be less than the 105% of weight of generator stator, including the weight of lifting beam with swiveling equipment and slings. Main Turbine hall building civil and structural design shall be done accordingly.

Special lifting and handling appliances may be used by the Contractor for erection and commissioning, but shall be refurbished by the Contractor and shall be handed over to the Employer as per in new condition.

B0.3.8.3 Consumables

The Contractor shall supply all chemicals, reagents, resins, lubricants, grease, filters and consumable items for operation up to COD including top up requirement at the time of issuance of PAC/ declaration of COD. All lubricants proposed for the Plant operation shall be suitable for all operating and environmental conditions that will be met on site consistent with good maintenance procedures as instructed in the maintenance manuals.

All types of chemicals, consumables, lubricants and grease shall be readily obtainable locally and a number of different types shall be kept to a minimum. For each type and grade of lubricant recommended, the Contractor shall list at least three equivalent lubricants manufactured by alternative companies.

The Contractor shall submit to the Employer the list and schedule of lubricants, greases, chemicals and consumables items including items qualities and quantities required per month of the Plant operation for the Employer's approval eighteen (18) months prior scheduled COD of the 1st Unit.

B0.3.9 Documentation

B0.3.9.1 Documentation with tender

General

- If a consortial bid is submitted, documents on the consortial agreement
- Description of options and alternatives offered
- Completely filled in price-, guarantee-, time-, and data schedules of the specification
- List of proposed makes and vendors
- Reference lists for delivery and installation of plants of similar type and size with separate references for the steam generator and steam turbine operating at same or similar parameters
- Requirements of grid code which cannot be met (if any)

- Description of means to accomplish primary frequency control according to grid code
- Description of means to accomplish secondary frequency control according to grid code
- Time schedule engineering for deliveries, erection/installation, commissioning and reliability test run
- Complete description of the Plant offered including description of the process and the equipment
- Layout drawings of the Plant
- Dimensioned drawings and sectional views of the principal plant components including materials
- Schematics of the principal plant systems
- General descriptions of individual systems and descriptions of operation including description of start-up, shutdown and emergency shutdown procedures
- All other documents necessary for comprehension of the offered plants and equipment
- Documents on the quality assurance system, including Quality Assurance Plan (The Quality Assurance Plan shall meet the requirements of ISO 9001:2000 and cover all activities under this FTS.)
- Training program and schedule for Employer's personnel
- Space requirement for lay down area, construction site and equipment
- List of personnel including qualification to operate the Plant and to perform day-to-day maintenance
- Initial Spare Part List as described under B03.7
- Equipment maintenance schedules for reliable centered maintenance.

Mechanical

- Process flow diagram of all systems
- Performance diagrams of main pumps and fans
- Plant and major equipment start-up curves for cold (all material on ambient temperature), warm and hot start up to MCR
- Water and waste water mass balances.

Steam Generator

Description for the equipment offered, giving information about:

- general outline of installation
- main control loops
- description of boiler protection system
- graphs showing the performance characteristic versus the load (flue gas temperatures, steam temperatures etc., including h-p-diagram)
- correction curves for ambient conditions and fuel variations
- material diagram showing material, dimensions, highest flue gas temperature and highest steam temperature, design material temperature and maximum admissible material temperature and design pressure for components of the steam/water system



- pulverizer performance diagram showing turn-down range of pulverizers and pulverizer outlet temperatures for different coal qualities.

Steam turbine generator

Description for the equipment offered giving information about:

- general outline of installation,
- main control loops,
- conclusive correction curves for steam turbine and cooling system with variations in:
 - power output with ambient temperature, humidity and river water temperature
 - specific heat rate with ambient temperature, humidity and river water temperature
 - generator efficiency vs. power output for varying power factor
 - degradation curves for the power unit and the Plant
- diagram showing the output of the turbine, of the generator and of the generator transformer versus the ambient air temperature (from +10 °C to +40 °C), humidity (between 20% and 100%) and river water temperature (from +20 °C to +35 °C).

Electrical system

- Electrical single-line diagram for the Power Plant including LV, emergency, safes AC and DC power supply
- Electrical single line diagram for the 400/230 kV GIS
- Unit protection and measuring single line diagram
- Performance diagrams (circle diagrams) of generator, saturation curves, unbalanced load diagrams
- Diagram with the output of the turbine, the generator and the generator step-up transformer versus ambient temperature
- Preliminary lists of motors and electrical consumers including power demand
- Auxiliary power requirement of the plant unit
- Arrangement of generator bus duct up to generator transformer, H.V and L.V. Cubicles, unit auxiliary transformer
- General arrangement of main electrical equipment within the relevant buildings, rooms, etc., including cross-sections
- Arrangement of connection from generator transformers to 400 kV GIS
- Arrangement of connection from start-up/stand-by transformers to 230 kV GIS
- General arrangement of the 400/230 kV GIS substation including the related control building and connection 400/230 kV interconnection transformers to 400 kV and 230 kV GIS
- Architecture drawing of the 400/230 kV substation control and monitoring system
- Description of the individual protection relays with related reference lists
- Description of the main electrical equipment (e.g. generator, excitation, AVR, generator protection, generator step-up and unit auxiliary transformer, start-up/stand-by transformer, 400/230 kV interconnection





transformer, 400 kV reactors, 400/230 kV GIS, Substation Control and monitoring System, 400/230 kV protection systems, 11 kV switchgear, etc.)- with related reference lists.

Instrumentation & control system

- Control system architecture showing all components provided for this Plant in their actual structural arrangement
- Layout drawing central control room
- Description of hardware, software and design philosophy of the DCS
- Reference list for the DCS with indication of plant type, system architecture and size of the system
- Data sheets, descriptions and brochures of the offered BMS and BPS
- Data sheets, descriptions and brochures of the offered local control systems, in particular PLCs
- Data sheets, descriptions and brochures of the CEMS including (if applicable) common emission data evaluation devices
- Data sheets, description and brochures of the communication systems as specified in the relevant Sections of **Section B8**
- CCTV system philosophy description and configuration drawing
- Data sheets, description and brochures of the training simulator as specified in the relevant Section of **Section B8**
- Temporary list of all drives, such as unidirectional motors, MOV's, SOV's and remotely operated control valves
- List of modulating controls
- List of package systems (black boxes)
- Description of field equipment
- Description of structure of the control functions including list of unit co-ordination level, functional group level, sub-group level
- Description of the interface to the boiler protection system and the steam turbine generator protection system
- Procedure for calculation of the availability of the DCS.

Civil

- Architectural outline drawings for all buildings and building structures showing the arrangement of the complete Plant, inclusive of all levels and Sections
- Site plan of the complete Plant showing all buildings, building elements, roads, landscaping etc.
- Schematic design of main buildings
- Typical concrete block pad and chimney foundation
- Typical pole foundation for HV towers
- Details, with calculations, for the main foundation system proposed
- Basic design of Site infrastructure
- Basic design of the chimney
- Basic detail of the coal storage yard
- Basic detail of the ash pond.



B0.3.9.2 Documentation after Award of Contract

The documents required for design, construction, installation, operation and maintenance of the entire Plant shall be submitted by the Contractor in good time so as to permit the Plant as a whole to be erected in compliance with the specified time table.

All documents, including the installation and operation and maintenance manuals as well as the related software shall be in fluent, legible English. In addition, operation and maintenance manuals shall be translated into Bangla and provided as paper copies and in electronic format.


The Contractor shall list all the drawings and submission schedule for the Employer's approval. Only the most important documents are listed below. These documents shall be submitted sufficiently in advance, so that corrections and amendments desired by the Employer as well as resubmission of the documents will not result in any delays with respect to the guaranteed time schedule. The Employer reserves the right to request from the Contractor additional drawings, documents, etc. as may be required for proper understanding and definition of the design and engineering of the Plant.

The overall responsibility with regard to completeness, correctness and suitability for the permit application process remains with the Contractor. In no case any comment, correction, amendment and approval (if any) by the Employer shall relieve the Contractor from this responsibility.

The drawings and documents to be submitted during this stage are listed in the various Sections and comprise the following. They shall be submitted within the specified time scale calculated in weeks after Award of Contract. Details shall be agreed according to the approval procedure for drawings and documents above.

The Contractor may propose modifications to the list as given below, in order to ensure timely completion of permit application documents and performance of the works according to the project's requirements and in accordance with the specified project time schedule. Any modification to this list shall be submitted for Employer's review and approval.

The Employer reserves the right to require detailed information on the progress of drawing and document preparation from the Contractor at any time during this stage.



		Weeks after Contract Award	
Document	Purpose	Preliminary	Final
• General			
• Current list of drawings	1	4	every 1 month
• Complete list of documents	1	4	every 1 month

Document	Purpose	Weeks after Contract Award	
		Preliminary	Final
with proposed submission deadlines			
• Progress reports	I		every 1 month
• Erection and installation progress reports	I	-	every 1 month after start of site activities
• Quality assurance procedure and program	A	with Bid	24
• structure of Contractors QA&QC manpower at site	A	with Bid	24
• indicative field quality plan for civil works	A	with Bid	24
• Plant layout		with Bid	16
• List of subcontractors/manufacturers	A	with Bid	12
• Proposed inspection and testing programs	A	12	24
• Noise propagation calculations	A	-	24
• Detailed program for commissioning	A	24	6 months ahead start pre-commissioning
• Studies / surveys regarding water intake and water discharge	A	12	24
• Detailed program of Reliability Test Run	A	24	6 months ahead start Reliability Test Run
• Detailed program of Performance Tests	A	24	6 months ahead start Reliability Test Run
• Testing documents/Report of results of all tests	A	2 weeks after test	6 months ahead start Reliability Test Run
• Training program	A		6 months ahead of pre-commissioning
• As-built-documentation including drawings of all equipment	A	-	1 month after COD of the 1 st Unit
• Declaration of conformance with all local regulations	I	-	latest with start of pre-commissioning
• Spare part lists	A	with Bid	18 months ahead of COD of 1 st Unit
• Time scheduling	A	with Bid	every 1 month
• Overall time schedule for design, manufacture, supply, assembly, erection and commissioning broken down for the principal plant components and all			



Document	Purpose	Weeks after Contract Award	
		Preliminary	Final
construction works, stating dates for completion of any preparatory work from others which may be necessary			
• Detailed erection, installation and commissioning schedule	A	12	2 months ahead of erection / pre-commissioning
• Mechanical Engineering			
• Arrangement drawings of principal components with ducts and platform layout	A	with Bid	12
• Arrangement drawings of auxiliary equipment (cubicles, etc.)	A	12	24
• Process flow diagrams	A	with Bid	12
• Piping and instrumentation schematics and isometric drawings, including list of pipelines and valves, stating materials, nominal diameters and pressure, dimensions, insulation thickness of all pipes	A	8	24
• Plans of main pipelines including location of cable routes	A	8	24
• Characteristics of pumps, fans etc.	I	16	24
• Details of required auxiliary energy sources and consumables (e.g. electricity, steam, chemicals, instrumentation air, working air) with condition data, required quantities and consumption values.	I	16	24
• Water and waste water balances	A	with Bid	36
• Thermodynamic diagrams / heat balance diagrams	I	with Bid	24
• Start-up and shutdown diagrams with descriptions (cold, warm, hot)	A	with Bid	2 months before pre-commissioning
• Sectional and detail drawings of all components including materials	I	16	36
• Lifting plan for all lifting operations (repair, maintenance, etc.)	I	24	36
• Limits of coal and high speed diesel properties	I		with Bid



Document	Purpose	Weeks after Contract Award	
		Preliminary	Final
• Design calculations of pumps, isolations, piping, etc.	I	12	36
• Water hammer calculation of plant water and cooling water system	I	8	12
• Hydraulic model test procedure of plant water and cooling water systems; institute to perform the tests	A	4	8
• Hydraulic model tests reports of plant water and cooling water systems	A	-	12
• Cooling Tower Recirculation Study	I	-	12
• Sedimentation Study	A	-	12
• Pulverizer performance diagram with pulverizer turn-down range	A	with Bid	12
• Material diagrams for pressure part	A	with Bid	24
• Reference lists with information on successful operating years for: - steam turbines - steam generators - pulverizers - firing systems / burners	A		with Bid
• System description of firing system	A	with Bid	24
• Final correction curves for Plant and equipment performance tests acc. to ASME PTC46 etc.	A	-	with Bid
Electrical Engineering			
• Electrical single line diagrams	A	with Bid	12
• List of motors and consumers	I	8	every 1 month, final after erection completion
• Electrical equipment sizing calculations (generator main connection, transformers, emergency diesel generators, safe AC and DC power supply, power cables, etc.)	A	12	24
• Cable list	I	16	every 1 month, final after erection completion
• Standard circuit diagrams for all different kinds of electrical	A	12	24



Document	Purpose	Weeks after Contract Award	
		Preliminary	Final
consumers			
• Performance diagram (circle diagrams) of generator	I	with Bid	12
• Circuit diagrams for all individual electrical equipment	I	12	24
• Lists of equipment and devices	I	12	24
• Earthing and lightning plans with calculations	A	12	24
• Lightning protection plans with details of measuring locations and reports of measurements taken following commissioning		12	24
• EMC concept with coordinated overvoltage protection	I	12	16
• Arrangement drawings for switchgear and battery rooms, station service transformers, cable floors, etc.	A	12	24
• Diagram showing power output of plant generator and related transformer vs. ambient temperature from +20 °C to +40 °C	A	with Bid	12
• Block diagram generator/unit protection	A	12	24
• Block diagram AVQC for the generator	A	12	24
• Line plans of fire alarm system if applicable	A	12	24
• Arrangement drawings showing exact location of fire alarm devices if applicable	I	12	24
• Power and lighting installation plans including related calculation	I	16	24
• General arrangement drawings of the required cable trays, cable laying plans	I	12	24
• Dimensional drawings and erection drawings for generator, transformers, switchgear etc., including frontal and plan views	I	12	24
• Dimensional drawings of generator auxiliary equipment	I	12	16
• Dimensional drawings of switching cubicles, generator leads and star point cubicles, voltage regulation cubicles, excitation cubicles, generator circuit breakers, including	I	12	24



Document	Purpose	Weeks after Contract Award	
		Preliminary	Final
equipment configuration			
• Calculation of mechanical stresses of switchgear rooms due to arcing faults	I	12	16
• Short circuit calculation and determination of protection relay settings for generator protection, 400/230 substation and auxiliary electrical supplies under consideration or protection of the entire system	A	12	24
• Protection and metering diagram for unit protection, start-up/stand by transformer protection, 400/230 kV GIS protection	A	16	24
• Load flow, system transient stability and motor start-up study	A	16	24
• Information for electrical system study by PGCB (see relevant part in Section B0)	I	8	16
• Generator charts and exciter characteristics	I	12	16
Instrumentation and Control Engineering			
• Control system architecture showing all components incl design concept redundancy	A	with Bid	24
• Operation and control philosophy	A	8	16
• Design concept earthing	A	16	24
• Design concept explosion protection	A	16	24
• List of packaged systems (Black Boxes)	A	with Bid	24
• Layout drawings central control room showing spatial distribution of desks and panels (3 D view)	A	with Bid (2D only)	24
• Layout of electronic rooms showing spatial distribution of cubicles and racks	A	16	24
• Description for all functional group controls, functional schematics (both in machine language and according to ISA-standard)	A	16	24
• DCS/PLC interface	A	16	24



Document	Purpose	Weeks after Contract Award	
		Preliminary	Final
documentation, I/O point assignment			
• Engineering drawings of control valves, control dampers together with their actuators, orifices, nozzles, venturi nozzles	I	16	24
• External connection diagrams, terminal connection diagrams combined schematic and circuit diagrams	I	16	24
• Communication systems	A	16	24
• As built software programs for DCS, PLC or other systems	I		1 month after COD of the 1 st Unit
• Instrument list	A	16	24
• Cable routing plan	I	16	24
• Civil Engineering			
• 3D model of the complete Plant incl. all civil structures, all mechanical equipment, piping > 50mm, electrical equipment e.g. cable trays, HVAC etc.	I	16	24
• 3D model clash checking and walk through	A	3 weeks after 3D model distribution	3 weeks after 3D model distribution
• General layout plan of the Plant site including all buildings and outdoor installations, roads etc. prepared on the basis of the topographical survey of the site	A	with Bid	12
• Detailed civil arrangement drawings of all buildings and structures, including plan-views and Sections (scale 1 : 100)	A	with Bid	12
• Architectural views (all sides) for all buildings of the Plant	A	4	12
• Arrangement drawings for external systems including all supply and disposal facilities, roads with manoeuvring areas; outdoor facilities (sewage, drainage, ducts and trenches, fencing and gates; tank farm, outdoor foundations etc.	A	4	24
• Detailed drawings and documents			
• Detailed foundation drawings	I	4	12



Document	Purpose	Weeks after Contract Award	
		Preliminary	Final
for all buildings and structures (A. E., turbine, boiler and stack foundations etc.)			
• Detailed structural drawings for all buildings and structures (concrete and steel structures)	I	8	24
• Detailed architectural drawings	I	8	24
• Room books including external and internal finishes windows, doors, sanitarys, wall cladding, roof etc.	A	8	24
• Detailed drawings for all internal services and installation works (HVAC; water, sewage, drainage, lighting)	I	8	24
• Detailed drawings with embedded parts, anchors, plates, fixings etc.	I	8	24
• Detailed drawings for outdoor installations and services (sewage, drainage; water, ducts, trenches, culverts, pipes, cable routes, manholes, pits etc.	A	8	24
• Detailed drawings for roads including accesses, footpaths, fencing, gates, landscaping, bridges, pipe racks	A	8	24
• Checked and approved statical and dynamical analysis prepared/for all buildings and structures of the Plant	I	8	24
• Detailed constructive description of individual buildings with regard to the structural design (structural systems, foundations etc.)	I	8	24
• Sectional elevations and roof plan	I	4	24
• Underground services and ducts with equipment appertaining to the services	I	8	24
• Principal details and Sections for traffic areas, especially for ramps and retaining walls	I	8	24
• Structural drawings pertaining to river water outfall and intake facilities	A	8	24
• Foundation drawings and other underground concrete works	I	4	24



Document	Purpose	Weeks after Contract Award	
		Preliminary	Final
• Permit application documents			
• Documentation for operating permits	A	4	12
• Documentation for other permits	A	4	12
• Other documentation			
• Schedules of workshop tests	I	-	1 month ahead of test
• Quality assurance manuals	I	16	24
• Manual of Codes and Standards		16	24
• Operating manual	A	6 months ahead of pre-commissioning	1 month after COD of the 1 st Unit
• operating procedures and instructions of the Plant with description of all systems, processes and functional groups			
• as built documentation			
• general and individual control concept description			
• Plant and equipment protection and signal processing description with all alarm and trip signal settings			
• all operating conditions including electrical grid supply and connection conditions			
• Service and maintenance manual	A	6 months ahead of pre-commissioning	1 month after COD of the 1 st Unit
• maintenance procedures and instructions with description of all equipment and facilities			
• Equipment data sheets			

Purpose: A : for Approval
I : for Information



B0.3.9.3 Data and simulation models

The Tenderer shall submit the data of the Plant for transmission simulation to PGCB according to the Bangladesh Grid Code however minimum following data:

Components	Data	Value of data
Generator step-up transformer	Rating	MVA
	High voltage	kV
	High voltage connection	
	Low voltage	kV
	Low voltage connection	

Components	Data	Value of data
	Positive seq. Impedance	%
	Positive seq. Resistance	%
	Positive seq. Reactance	%
	Zero seq. Impedance	%
	Zero seq. Resistance	%
	Zero seq. Reactance	%
	MVA for base impedance	MVA
	Maximum tap	kV
	Maximum tap position	
	Minimum tap	kV
Generator	Minimum tap position	
	Nominal tap position	
	Value of tap step	
	Core loss	kW
	Copper loss at full load	kW
	Auxiliary power	kW
	Type	
	Manufacturer	
	Rated output	MVA
	Rated voltage	kV
Turbine	Connection	
	Inertia constant	
	X _d	%
	X' _d	%
	X'' _d	%
	X ₂ (Negative sequence)	%
	X ₀ (Zero sequence)	%
	MVA for base impedance	
	Type	
	Rating	MW
Exciter	Inertia constant	
	HP natural frequency and vibration band	Hz
	IP natural frequency and vibration band	Hz
	LP natural frequency and vibration band	Hz
Governor	Type	
	Range $\pm$ % of rated voltage	%
Unit auxiliary power consumption	Model No.	
	Droop	%
	Deadband	Hz
	Real power auxiliary load	MW
	Reactive power auxiliary load	MVAR

The Tenderer shall also submit models for simulation studies which are compatible with the software used by PGCB. PGCB is using PSS®E software).

The simulation studies include, but are not limited to:

- a. power flow
- b. short circuit
- c. transient stability.

All characteristics and models shall operate in stable and accurate manner under all frequency range stipulated in this Part B0, including consideration on the following:

- a. large frequency variations upwards (increasing) up to 52Hz,
- b. large frequency variations downwards (decreasing) up to 47.0Hz,
- c. grid system faults,
- d. splitting of the grid system into islands.

All simulation models submitted for stability studies must be in the form of fully validated models for the software used by PGCB simulation. The models shall be provided complete with the following documentations:

- a. model software source codes (flescs) as well as object (binary) codes,
- b. description of the models including the engineering of model derivations,
- c. user operation manuals
- d. user application guides
- e. model block diagrams
- f. values of parameters
- g. input data format
- h. criteria for acceptable operation (threshold parameter values such as minimum steam pressure, maximum hydrogen pressure, etc).



The models shall represent closely the on-site response and setting.

Generator and excitation systems

The fully validated control block diagram representation of the software used by PGCB simulation model (including all limiters and power system stabilisers), shall be submitted to PGCB together with:

1. Explanation of all the symbols used
2. Clearly labelled sub-systems of control and protection, such as, Volt/Hz limiter, maximum field current limiter, stator current limiter, minimum field current limiter etc.
3. Input-output relationships, by giving:
 - a) Equations
 - b) Characteristics/Chart/look-up table
 - c) Other input/output relationship (if any).
4. Indication whether the parameters in the block diagram can be measured on the actual system.

Governor

The fully validated control block diagram representation of the software used by PGCB simulation model for the governor systems shall be submitted to PGCB together with:

1. Explanation of all the symbols used
2. Clearly labelled sub-systems of control and protection, such as, additional corrective control against frequency deviations (if any) and other controls (if any).
3. The following variables, states, and limits:
 - a) mechanical output
 - b) generator output
 - c) turbine speed
 - d) mechanical output of steam turbine (ST)
 - e) MW output of ST
 - f) shaft speed of ST
 - g) turbine steam pressure of ST
 - h) turbine steam pressure deviation of ST
 - i) turbine steam temperature of ST
 - j) main control valve position of ST
 - k) intercept valve position of ST
 - l) load limiter signal.
4. Tenderer shall inform values of limits and acceptability (or violation) criteria on the following:
 - a) reverse power (cause reverse power trip when violated)
 - b) Power Load Unbalance (PLU) (or similar) relay trip (if any which cause trip when set criteria is violated)
 - c) operational limits and criteria
 - d) others (if any which cause trip when violated).
5. Tenderer shall inform input-output relationships, by giving
 - a) Equations
 - b) characteristics/chart/look-up tables
 - c) other input/output relationship (if any).
6. Tenderer to inform whether the parameters in the block diagram which exist and can be measured on the actual system.



The above models and documentation shall be submitted in CD-ROM media (read only). One hardcopy of the same is also required to be submitted.

Due dates and versions for data submission and simulation models are as follows:

Due dates

90 days after signing of this Agreement

90 days prior to the Initial Operation Date of the First Unit

Type of data to be submitted

Committed Project Data

Contracted Project Data

Estimated Registered Data



Due dates

30 days after the Commercial
Operation Date of the First
Unit

Type of data to be submitted

Registered Data

B0.3.9.4 Requirements for documentation

Unless agreed otherwise, five (5) hard copies and three (3) sets of electronic copies of all documents are to be submitted in the English language. In addition, operation and maintenance manuals shall be translated into Bangla and provided as paper copies and in electronic format. Electronic Copies shall be submitted in primary original data format (e.g. DOC, XLS, DWG) as well as in a printable non-proprietary document format (e.g. PDF). Especially P&IDs shall be submitted as DWG files and PDF files.

The Contractor shall provide, install, operate and maintain a web based electronic data room / data server. The format and filing system shall be mutually agreed between Employer and Contractor.

All documentation shall comply with uniform documentation instructions according to Employer's requirements. Detailed requirements for documentation will be determined during contract execution by the Employer.


Contractor shall comply with Employer's directive concerning documentation requirements for implementation in an automated plant operation system.

The final documentation including but not limited to operating manuals, maintenance and service manuals, component documentation, assembly documentation, drawings and listing, etc. shall be submitted in the English language. In addition, operation and maintenance manuals shall be translated into Bangla and provided as paper copies and in electronic format.

Contractor shall also integrate and submit all the above data for each Unit into the PSS@E load flow raw data file ("raw data") and PSS@E dynamic raw data file ("dyr data") which are ready to be used for studies on operation and planning of the Grid System by PGCB using PSS@E (to be confirm by PGCB/BIFPCL)

Data for each Unit shall also include reactive power capability curve of the Facility, written in the format compatible to PSS@E activity GCAP. For this purpose, at least 10 (ten) pairs of data on the generator reactive power capability curve shall be provided for each Unit.

The final requirements for Transmission lines and Interconnecting Facilities documentation will be subjected to PGCB's approval which will be made known during execution stage.



B0.3.9.5 Approval procedure for drawings and documents

The Employer reserves the right to ask the Contractor to submit drawings and other documents for approval to the Employer or to its representative.

Before submittal of any such drawing or other document, the Contractor shall submit a detailed list comprising all drawings or other documents the Contractor will produce. Based on this list the Employer will decide which drawings or other documents will have to be submitted for approval, information or other purpose.

The documents for approval are primarily basic documents and all documents that are required to check that Contractual and operational requirements are met. It is expected that in total approximately 600 to 800 documents will be for approval.

When submitting drawings or other documents for approval, including any prepared by subcontractors, the Contractor shall certify in each case that he has examined such drawings or documents and that they comply with the requirements of the Contract.


The Contractor is requested to provide Third Party Verification of structural documents, e.g. structural analysis, drawings and connecting details prior to submission for approval. These documents must contain all information necessary for the execution of the works.

Approval of a drawing or other document will imply that:

- They have been examined and appear to be in accordance with the basic design concept of the project and meet the requirements of the specification.
- They have been examined in relation to compatibility of the items and equipment with the specification and respect of interconnections with other items, equipment or systems.
- The Contractor is not relieved of his responsibility under the Contract.

The Contractor is to arrange for the revision history of drawings and other documents as follows. The first revision shall be indexed by the letter "A" followed up by the respective letter in alphabetical order.

Once the drawing or document is approved for construction by the Employer or its representative the document shall be indexed with the number "0" followed up by the respective number in chronological order. Hence, the sequence of the revision index of a design document shall be as follows; A - B - C - [...] - 0 - 1 - 2 - [...]. Each revision is to be listed in the revision history with the respective date and a short description of the modification(s). In addition, all modification(s) shall be highlighted and/or marked up as specific and detailed as possible.



Furthermore, each drawing/document shall be indicated with a unique document number according to the following standard:

Maitree – Unit – KKS – DCC – 12345 – XYZ – REV

Where:

Maitree	Project-Denomination
Unit -	00 (for common), 01 (for unit 1), 02 (for unit 2)
KKS -	Function Key as per KKS system (1 to 3 letters)
DCC -	DCC code according to EN/IEC 61355
12345 -	Document number
XYZ -	Sub-/Contractor number
REV -	Revision index

For each comment, the Employer will allocate a priority in the TCS (Technical Comment Sheet). The priorities range from 1 to 3 as follows:

1	-	High Priority
2	-	Medium Priority
3	-	Low Priority

The TCSs are to be named with the above described identification key and the supplementary ending "... - RI" ("Revision Income") for TCSs being sent from the Contractor to the Employer and "... - RO" ("Revision Outcome") vice versa.

The Contractor shall be responsible for any discrepancies, errors or omissions in the drawings and other documents supplied by him, whether such drawings or other documents have been approved or not.

B0.3.9.5.1 Documents which require Approval from Grid Operator/BPDB

Documents especially test procedures and protocols, which are due to approval by the grid operator or BPDB required following specific times for submittal and approval.

B0.3.9.5.1.1 Testing Procedure and Protocols

At least one hundred and twenty (120) Days before the scheduled commencement of the testing and Commissioning of the Plant, the Contractor shall, upon request from BPDB, submit to BPDB detailed procedures and protocols to be used during the corresponding testing. BPDB shall have the opportunity to provide written comments, if any, on the proposed procedure and protocols within thirty (30) Days of receipt from the Contractor of said documentation. If BPDB fails to submit written comments to the Contractor within the thirty (30) Days stipulated above, it shall be deemed to have accepted the detailed procedure and protocols provided by the Contractor.



000088

On receipt of such comments, if any, the Contractor shall review and submit the final procedure and protocols, to be used for testing not later than sixty (60) Days prior to the scheduled commencement of the respective testing and Commissioning:

- a. if BPDB fails to submit written comments to the Contractor within the thirty (30) Days stipulated above, it shall be deemed to have accepted the detailed procedure and protocols provided by the Contractor; and 35
- b. if the Parties fail to reach agreement on the procedures and protocols within sixty (60) Days prior to the scheduled commencement of the respective testing and Commissioning,

the matter may be referred to the Engineer by either Party, and the Engineer shall make the decision on the protocol and procedures within the five (5) Days of the matter being referred to it, and such decision shall be binding on the Parties.

B0.3.9.5.1.2 Start-up and Test Schedules

At least ninety (90) Days before the scheduled commencement of testing and commissioning of the First Generating Unit or the Plant, as the case may be, the intended Start-Up and test schedule for such unit.

B0.3.9.5.1.3 Operating Procedures

- a. Not later than one hundred and twenty (120) Days before the then prevailing Scheduled Initial Operations Date, the Contractor shall, upon request from BPDB, provide BPDB with draft operating procedures dealing with all operation interfaces between BPDB and the Contractor including, but not limited to:

- method of Day-to-Day communication
- key personnel list
- clearances and switching practices
- outage scheduling
- capacity and energy reporting
- operating log; and
- reactive power support

which shall be consistent with this Agreement, the designs of the Facility (including the Metering System), the Technical Limits and Prudent Utility Practices (together, the "Operating Procedures").

- b. Within thirty (30) Days after BPDB's receipt of the draft Operating Procedures, BPDB shall notify the Company of any requested deletions, amendments or additions.



- c. The Company shall make any deletions, amendments or additions that BPDB reasonably requests unless they would be inconsistent with this Agreement, the Technical Limits, the designs of the Facility (including the Metering System), or Prudent Utility Practices and provide such revised draft to BPDB, which shall be treated as final Operating Procedure, not later than thirty (30) Days before the then prevailing Scheduled Commercial Operations Date.
- d. Not Used
- e. Either Party may, from time to time, request revisions to the Operating Procedures subject to agreement from the other Party.

B0.3.9.6 Quality control procedure

A comprehensive **quality control procedure / quality assurance programme** for all aspects of the works shall be prepared by the Contractor and shall be submitted to the Employer for approval.

The Contractor shall adopt suitable quality assurance programme (QAP) to ensure that the equipments and services under the scope of Contract whether manufactured or performed within Contractor's works or at his subcontractor's premises or at the site or at any other place of work are in accordance with the specifications. Such QAP shall be outlined by the Contractor and shall be finally accepted by the Employer or his authorized representative after discussions before the start of work. The QAP shall be generally in line with ISO Systems.

The quality assurance program shall consist at least of the following:

- testing during manufacturing
 - workshop inspections and testing
 - factory acceptance tests (FAT)
- testing at site
 - construction inspections and testing
 - erection / mechanical completion
 - pre-commissioning and commissioning tests (cold and hot commissioning)
 - optimization of overall Plant
 - final inspection and testing
 - Bench mark testing
- completion test
 - performance tests
 - reliability test run.



An outline of the proposed comprehensive quality assurance programme is to be provided with the Tender and is subject to review by the Employer.