



STANDARD TECHNICAL SPECIFICATION FOR MISC TANKS

SPECIFICATION NO. PE-TS-417.167-A001

SECTION-I

SUB SECTION-I B

REV 00

DATE 29.03.2018

DATASHEET OF VALVES

S.N	COMPONENT	DESCRIPTION
1.	Body & Bonnet	ASTM A182 Gr.F304 (50NB & below) ASTM A351 Gr.CF8M (50NB above)
2.	Wedge & Seat ring	ASTM A182 Gr.F304 (50NB & below) ASTM A351 Gr.CF8M (50NB above)
3.	Trim	ASTM A182 Gr F304
4.	Rating	Class 800 (50NB & below) Class 150 (50NB above)
5.	Ends	SW to B16.11 (50NB &below) Flanged to B16.5 (50NB above)
6.	Design Standards	B16.34 / API600 for Gate valve B16.34 / BS1873 for Globe valve
7.	Testing standards	API 598 for all valve (All sizes)
8.	Bolts & Nuts	A193 Grb7 & A194 Gr.2H

	TITLE 5X800 MW TSGENCO YADADRI TPS MISCELLANEOUS TANKS SPECIFIC TECHNICAL REQUIREMENTS	SPECIFICATION NO. PE-TS-417-167-A002	
		REV 00	
		Section -II	Date 29.03.18
		Page 1 of 1	

SECTION – II

STANDARD TECHNICAL SPECIFICATION

SUB-SECTION IIA – Standard Technical Requirement (Mechanical)

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 1 of 9	

1.0 **SCOPE**

This specification covers design, engineering, supply of material, fabrication, assembly, inspection and testing at shop as well as at site, erection and commissioning, painting and functional demonstration testing at site.

2.0 **CODES & STANDARDS**

The design, fabrication & assembly, erection & performance of steel tanks shall comply with all latest statutory regulations and safety codes applicable in the locality where the tanks are to be installed. Tanks shall conform to the latest applicable Indian / British / USA standards. The vendor shall not be construed to be relieved of his responsibility by virtue of this specification. The tank in general shall conform to the latest editions, as applicable, out of the following standards.

1. IS-800 Code of practice for use of steel in general building construction
2. IS-803 Code of practice for design, fabrication and erection of vertical mild steel cylindrical welded oil storage tank.
3. IS-804 Specification for rectangular pressed steel tanks
4. IS-805 Code of practice for use of steel in gravity water tank.
5. IS-816 Code of practice for metal arc welding for general construction in MS.
6. IS-817 Code of practice for training and testing for metal arc welder
7. IS-2825 Code of practice for unfired pressure vessel
8. BS-2594 Specification for carbon steel welded horizontal cylindrical storage tank
9. BS-2654 Specification for vertical steel welded storage tanks with butt welded shells for the petroleum industry
12. Indian Factories Act
13. American code for oil tanks API 650
14. Material Specification as per relevant IS / or approved equal
15. American water works association standards (AWWA D100)

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 2 of 9	

3.0	<u>DESIGN REQUIREMENT</u>
3.1	<u>General Requirement</u>
3.1.1	All tanks will be mild steel tanks. The tanks will be of welded construction and will be designed to withstand satisfactorily the internal forces due to the liquid which these tanks have to hold as specified and external forces due to wind and seismic forces without deformation or undue strain. The plates will be cold rolled through plate bending machines by several no. of passes to the curvature.
3.1.2	Tank thickness shall be calculated as per IS803 latest edition. Intermediary wind girder design, Wind Design, Seismic design, anchor bolt design / selection etc. shall be done as per API 650 latest edition, latest addendum available at the time of detail engineering.
3.1.3	All tanks will be designed for the capacities, dimensions and working conditions as specified in DATA SHEET for DM & Condensate Storage Tank . These tanks will be provided with all necessary connections as specified. The design of tanks will be such as to allow easy inspection, cleaning and repair. Due consideration will be given to wind loading and adequate stiffening will be provided to prevent failure of tank due to buckling when it is empty. A 2.0 mm corrosion allowance for shells, bottom and roofs above and beyond the required thickness / calculated thickness / nominal thickness as specified in the design code shall be provided.
3.1.4	Vessel seams shall be so positioned that they do not pass through nozzle connections on vessel. For vessels consisting of more than two sections, longitudinal seams shall be offset.
3.1.5	The inside seam should be ground smooth, suitable for application of corrosion resistant primer. If the stiffening of shell, bottom and / or roof is necessary, tanks will be stiffened from outside.
3.1.6	Flange faces of all nozzles shall be machined and squared with the vessel center line.
3.1.7	All roofs and supporting structures shall be designed to support dead load plus a uniform live load of not less than 150 kg/m ² of projected area.
3.1.8	The tanks shall be designed to have all courses truly vertical. Adequate distance between vertical joints in adjacent courses shall be taken so that the distortion is reduced to minimum.
3.1.9	When removing temporary attachments from shell plates, care should be taken that parent plate is not damaged. Holes in plate work to assist in fabrication / erection should be avoided as far as possible. The location of holes and method of filling shall be indicated in the fabrication drawing. Any projection of metal shall be chipped and ground flush with the plate surface. The plate shall not be gouged or torn in process of removing lugs.
3.1.10	In the construction of shell, very care shall be taken to minimize distortion or lack of circularity due to welding or for any other reason.
3.1.11	Material of construction of all tanks shall be mild steel conforms to IS – 2062 grade – B unless otherwise specified in the DATA SHEET for DM & Condensate Storage Tank .

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 3 of 9	

3.1.10 **Alignment**

3.1.10.1 Plates to be joined by butt-welding shall be matched accurately. Misalignment in completed vertical joints shall not exceed 10% of the plate thickness or 1.5 mm for plates of 20 mm thick and under, whichever is larger.

3.1.10.2 In completed horizontal butt joints, the upper plate shall not project beyond the face of the lower plate at any point by more than 20% of the upper plate thickness with a maximum of 3 mm for plate thickness exceeding 8 mm except that for plate thickness 8 mm and under, the maximum shall be 1.5 mm.

3.1.10.3 Each tank shall be properly constructed ensuring perfect vertical alignment with 5 mm or as specified in the relevant code / standard and tank circularity within 5 mm on diameter or as specified in the relevant code / standard. Local bulging and / or depressions at any location of tank particularly shell shall not be permitted.

3.1.11 **WELDING**

3.1.11.1 Tanks and other attachments shall be welded as per IS-816.

3.1.11.2 Welding sequence shall be so adopted that distortion due to welding shrinkage shall be minimum. Welding procedure specification shall be submitted for approval of BHEL giving details of material, welding position, sequence, type of electrode used, pre-heat & post weld requirement etc as per the code of construction. Brand name of electrodes to be used with proper classification (e.g. E 6013) shall be as per BHEL's approval.

3.1.11.3 Welding shall not be carried out when the surface is wet and during periods of rain and high winds unless the welder and the work are properly shielded which should meet the approval of the purchaser.

3.1.11.4 Inspection of all welds shall be carried out in accordance with the governing code of construction. All material used by the purchaser such as electrodes, gaskets, bolts, nuts etc shall be conforming to relevant standards of repute and approved by the purchaser prior to use.

3.1.12 Each tank shall be complete with access staircase, ladder and safety cage and fittings like drain connection, overflow connection, tank inlet and outlet covers, level gauge glass, fittings with isolation cocks and protection covers, tank vent connection etc all complete with needed accessories for the completeness of the tanks and as specified in **DATA SHEET for DM & Condensate Storage Tank**.

3.1.13 All openings in tank plate shall be well reinforced in approved manner by adding pad plates of adequate size and / or structural sections.

3.1.14 **STAIRCASE / ACCESS LADDER AND HAND RAILING**

3.1.14.1 All cylindrical vertical tanks shall be provided with spiral staircase and shall conform to the requirements specified in design codes / standards unless specified otherwise. All stair treads shall be 32 mm steel fabricated gratings or 8mm thk. chequered plate which will be decided during detail engineering stage. Each tread, if needed, shall be housed in individual

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 4 of 9	

steel fabricated frame which shall be adequately supported from the tank outer periphery. The staircase shall have minimum 800 mm clear width.

3.1.14.2 Access ladder, one (1) for each horizontal cylindrical / rectangular tank shall be provided for access to the tank roof. It shall be steel fabricated having minimum 450 mm width. Ladder stringers shall be heavy steel flats or angle section. All rungs shall be minimum 20 mm diameter rods spaced at not more than 30 mm center to center. All ladders shall have steel fabricated safety cage to the approved construction. Safety cage shall be provided about 2.5 m clear height of the ladder. Access ladder's stringers shall be widely spaced at top for free access to the tank roof.

3.1.14.3 All staircase and roofs of vertical cylindrical tanks shall be provided with pipe hand railings of effective height as indicated in the relevant code / standard throughout. Handrails shall be constructed out of 32 mm medium class galvanized steel pipe conforming to IS- 1239: 1968. Handrail posts shall be arranged at spacing not greater than 1850 mm. Two (2) sets of pipes horizontal runners all along the length shall be provided. All welds joints in the handrails shall be ground flush to protect any person getting injured. Steel toe plates of 100 mm flats shall be used. Hand railing shall be fabricated and installed in an approved manner as directed by purchaser in accordance with approved drawings.

3.1.15 Unless otherwise specified, for all flanged connections, vendor shall furnish suitable counter flanges and necessary nuts, bolts and gaskets materials.

3.1.16 Unless otherwise specified, bolts and nuts shall be hexagonal head conforming to bolts and nuts shall be SA 193 & 194 respectively.

3.1.17 Gaskets shall be 3 mm thick full-face rubber or CAF. On completion of hydraulic test / water fill test, contractor shall replace the gaskets used during testing at his own cost.

3.1.18 Float level indicators other than float and arrow type level indicator, gauge glass shall be provided.

3.1.19 During erection of tank, shell plates shall be suitably supported both for outside and inside to avoid buckling / collapsing of tank due to high-speed wind, gust or severe storm, if any, occurring during erection.

3.2 **VERTICAL CYLINDRICAL STORAGE TANKS**

3.2.1 The vertical cylindrical storage (non- pressure) tanks shall be of mild steel welded construction and shall be designed in accordance with codes and standards as specified in the **DATA SHEET for Condensate Storage Tank**. The vertical cylindrical storage tanks shall have slightly sloping bottom towards an adequately sized sump inside the tank to enable complete draining of the tank. The tank shall be designed for a wind pressure and seismic coefficient as specified.

3.2.2 Conical roof shall be either self-supported or supporting. The roof shall have a slope as specified in the relevant design code to ensure drainage of rainwater. Needed roof rafters and purlins adequately designed shall be provided.

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 5 of 9	
3.2.3	All plates to be used for fabrication of tank shall be checked and all sides trimmed to make them square.		
3.2.4	All bottom plates shall have lap weld joints on all sides with overlap not less than five times the plate thickness.		
3.2.5	All shell course plates shall be taken during bending to prevent plate skewing. For butt weld joints, edges shall be prepared which shall be uniform and smooth throughout. To maintain needed root penetration gap at any butt weld joint, sufficient numbers of erection cleats shall be provided on all sides of outer periphery of each shell plate. Plates for tanks shall be straightened by pressing or by other non-injurious methods.		
3.2.6	Each shell course shall be of uniform width throughout longitudinal weld in plates. Make up for the course width shall not be permitted. Shell plates in each course width shall be so arranged that all vertical joints be staggered having a minimum of 600 mm stagger. Shell thickness could be reduced in upper courses depending on design requirements but in no case the plate thickness shall be less than 8 mm.		
3.2.7	The tank height shall be completed by the provision of top curb/ angle which shall be butt-welded to the adjacent tank plate courses. The outstanding leg of the curb angle shall be kept outside the tank periphery. All butt weld joints shall be full strength welds but for design of shell plate thickness adequate weld efficiency as recommended by applicable code(s) shall be used.		
3.2.8	Tank roof shall be either self-supported or supported over rafters / steel fabricated central column(s). Adequately sized and spaced rafters and purlins shall be provided. All rafters shall have sliding bolted connections at one end and preferably on the tank periphery side. The roof-supporting frame shall have needed tie rods or bracing sets.		
3.2.9	Roof plates shall have lap joints with lap not less than 25 mm and lap weld over the top surface only. Roof plates shall have continuous fillet welds around the tank curb angle. No joint of roof plate over the supporting frame shall be made.		
3.2.10	Openings needed for mounting various specified accessories shall be well reinforced in accordance with application codes and as approved. Manhole shall be bolted and hinged covers unless otherwise specified.		
3.2.11	All inlet pipe nozzles located at the top of tanks shall be provided with internal piping up to 500 mm high above the tank's bottom inside with suitable weir plate at bottom. The inside piping shall be adequately supported and shall be provided with adequately sized vent connection at pipe top.		
3.3.0	<u>RECTANGULAR TANKS</u>		
3.3.1	Rectangular tanks shall be fabricated in steel material and shall be designed to withstand internal hydrostatic pressure. In addition these shall be checked for a wind pressure and seismic coefficient as specified wherever applicable. While worst of these two shall be considered, the permissible stress shall be increased as per good engineering practice when their effect considered with tank load.		

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 6 of 9	
3.3.2	Tank bottom and / or side plates shall be of minimum 8 mm thick plate. Corrosion margin of at least 2 mm shall be provided over the design thickness of bottom and / or side plates.		
3.3.3	To support tank plates and to maintain required unsupported plate length, adequately sized and spaced steel structural closed frame shall be provided inside the tank. Longitudinal and / or vertical structural members to connect and adequately support these frames shall be provided at corners. Horizontal diagonal members / sway bracings at corner shall also be provided.		
3.3.4	Tank plates cut to size shall be welded on these frames. Plate butt weld joints at other locations shall be eliminated to avoid warping of the plates at free joints. Adequate openings in the structural frames, particularly at the bottom shall be provided to ensure complete unrestricted drainage of tank at one point. Suitable sized drain valve of size minimum 25 NB unless otherwise specified in the DATA SHEET for DM & Condensate Storage Tank shall be provided below the tank bottom for proper draining of the tank.		
3.3.5	Complete assembled tank shall have at its bottom longitudinal steel fabricated bearer beams welded to it. The tank with bearer will rest over number of concrete blocks to be provided by purchaser. The tank shall be adequately bolted / welded to the concrete blocks. Needed inserts / anchor bolts shall be furnished by the bidders. Grouting of tank over concrete blocks in approved manner shall be included in bidder's scope of work, if erection is also awarded to the bidder.		
3.3.6	Where rectangular tanks are flushed in dual compartments the inside partition plate shall be well reinforced to withstand hydrostatic test pressure completely on one side throughout the full height.		
3.3.7	The rectangular tank shall be designed as per good engineering practice and reference shall be taken from the book named "Theory of plates and shells" by Timoshenko. Design calculation shall be done in accordance with the above mentioned book.		
3.3.8	Suitable steel structural e.g. channels shall be provided below the bottom plate so that tank can rest on the foundation / slabs through the structural supports.		
3.4	<u>HORIZONTAL CYLINDRICAL TANK</u>		
3.4.1	The horizontal cylindrical tank with dished ends shall be of mild steel welded construction and shall be designed in accordance with BS – 2594 / IS – 2825 / ASME as specified in the DATA SHEET for DM & Condensate Storage Tank . The tank shall be designed for a wind pressure and seismic coefficient as specified. While worst of these two shall be considered, the permissible stress shall be increased as per relevant code / standard.		
3.4.2	The shell and dished end plate thickness shall be chosen as per design requirement but in no case the dished end and shell plate thickness shall be less than 8 mm.		
3.4.3	All seams, longitudinal as well as circumferential, shall be butt-welded. Longitudinal seams should not be situated in the lower third of a tank or on the top center line.		

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 7 of 9	

3.4.4

All tank shall be supplied with integral saddle support and shall be designed in accordance with BS- 2594 / IS – 2825 / ASME as specified in the **DATA SHEET for DM & Condensate Storage Tank.**

4.0

TESTING AND INSPECTION AT MANUFACTURERER’S WORKS

4.1

General

4.1.1

The supplier shall provide inspection to establish and maintain quality of workmanship in his works and that of his subcontractors to ensure the mechanical accuracy of components, compliance with drawings identity and acceptability of all materials, parts and equipment. He shall conduct all tests required to ensure that the equipment and material furnished shall conform to requirements of the acceptable codes. All tests and test procedure proposed by manufacturer shall be submitted to the purchaser for their prior approval.

4.1.2

All materials used for manufacture of the equipment under this specification shall be of tested quality. Relevant test certificates shall be made available to the purchaser before the final shop inspection. In case the relevant correlating test certificates are not available, the supplier shall arrange to carry out the necessary tests required by codes at his own cost.

4.1.3

Alloy cast iron and cast steel components shall be tested for both physical and chemical properties in absence of purchaser’s representatives. Test bears shall be either integral or taken from the same ladle of material as the casting they represent.

4.1.4

All materials including valves, instruments, pipings, flanges, counter flanges etc. shall be procured from BHEL approved manufacturer’s only. Dealers are not acceptable.

4.2

TESTING AND INSPECTION FOR TANKS

4.2.1

The scope of testing and inspection for pressure vessel covered in this specification shall generally comprise of the following:

i)

Examination and approval of fabrication drawings to ensure that design, materials and fabrication details meet requirement of code and specifications. Purchaser will review these drawings for interface problems and conformity with the general arrangement drawings and accord their approval.

ii)

Examination of materials of construction and identification with material test certificates.

iii)

All the plates of thickness 50 mm or more shall be ultrasonically tested to ensure freedom from laminations.

iv)

Ensuring the relevant weld procedure and welder qualification tests are in accordance with stipulated code requirements.

v)

Inspection of dished end flanges and alloy steel bolting where required.

vi)

Inspection during fabrication at appropriate stages including fit ups.

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 8 of 9	
	vii) For all butt welds, the root run and final run shall be subjected to dye-penetrant or magnetic particle inspection. For all fillet welds the final run shall be subjected to dye-penetrant / magnetic particle examination. viii) Examination of radiographs including radiographic techniques, supervision of other non - destructive tests and heat treatment procedure as required by codes and specifications. ix) Examination of internal cleanliness before final closure. x) Dimensional examination of completed vessel including axis marking, proof marking, match marking etc. xi) Witnessing of hydrostatic, pneumatic or vacuum tests or special tests as required by the code and specification. In case of hydrostatic tests, the test pressure must be kept for a minimum of two hours. xii) Witnessing cleanliness, preservation, packing and marking. xiii) Stamping of vessel and issue of certificates. xiv) All tanks under this specification shall be tested as per the relevant design and testing code / standard. Supplier shall submit the detailed testing procedure for the tanks during detail engineering stage for BHEL / customer / consultant's approval and approved document shall be adhered by them and testing shall be done accordingly without any commercial implication.		
4.2.2	<u>NON - PRESSURE TANKS</u> The scope of testing and inspection for non-pressure tanks covered in this specification will comprise of the following: i) Identification of materials to manufacturer's test certificates. ii) Inspection of plate edges after edge preparation and checking curvature against templates if shell plates sent after rolling. iii) Checking of dimension and match marking. iv) Bottom testing a. After the bottom and bottom course of shell plates have been welded, the bottom shall be tested by pumping air beneath the bottom plates to a pressure just sufficient to lift them off the foundation and in any case not less than 100 mm water gauge. The pressure shall be held by construction of a temporary dam of clay or other suitable material around the tank periphery. Soap suds or other suitable material shall be applied to all joints for detection of leaks. b. Fuel oil may be used instead of air and soap suds to test for leaks, subject to prior agreement and approval of purchaser.		

	TECHNICAL SPECIFICATION FOR MISCELLANEOUS TANKS (STANDARD TANK SPECIFICATION)	SPECIFICATION NO. PE-TS-417-167-A001	
			SECTION IIA
		REVISION 00	DATE: 29.03.2018
		PAGE 9 of 9	

c.

Alternatively, the bottom seams may be tested by vacuum box method subject to prior agreement and approval of the purchaser. The vacuum box used shall comply with IS- 803, 1976 (figure-24)

v)

Shell testing

The shell of fixed roof non - pressure tanks shall be tested after completion of roof. Testing shall be done by filling the tank with water to the level of the top leg of the top curb angle and noting any leaks.

vi)

Roof testing

The roof of the tank shall be tested by pumping air under the roof plates while the tank is still full of water. In the non - pressure tank, the roof shall be tested to a pressure of 75 mm of water gauge and in case of pressure roof tanks, to a pressure of one and a quarter times the pressure at which the pressure sides of the pressure / vacuum relief valve is designed to open. Soap suds or other suitable material shall be applied to all joints for detection of leaks.

vii)

All field-testing shall be performed prior to any painting or coating application.

4.3

REPAIR OF LEAKS

4.3.1

All leaks detected during testing shall be repaired to the satisfaction of the purchaser and on completion retested for leakage as per approved procedure.

4.3.2

In the joints between roof plates only, pin hole leaks may be repaired by mechanical caulking. However, where there is any indication of considerable porosity, the leaks shall be sealed by laying down an additional layer of weld over the porous sections.

4.3.3

In all other joints, whether between shell plates or bottom plates or both, leak shall be repaired only welding and if necessary, after first cutting out the defective part.

4.3.4

When the tank is filled with water for testing, defects in the shell joints shall be repaired with the water level at least 300 mm below the joint being repaired.

4.3.5

No welding shall be done on any tank unless all lines connecting thereto have been completely blanked off. No repairs shall attempted on tanks while filled with oil, nor any tanks which have contained oil until the tanks have been emptied, cleaned and freed from gas in a safe manner. No repair shall be attempted by the on a tank which has contained oil except in a manner approved in writing by the purchaser, and in absence of the purchaser’s inspector.

**TITLE****5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS**

SPECIFICATION NO. PE-TS-417-167-A002

REV 00

Section -II

Date 29.03.18

SPECIFIC TECHNICAL REQUIREMENTS

Page 2 of 1

SUB-SECTION IIB**SITE STORAGE AND PRESERVATION GUIDELINES**

SITE STORAGE AND PRESERVATION GUIDELINES

FOR

MECHANICAL BOPs

(Doc No: PE-DC-SSG-A001 REV.00)



PROJECT ENGINEERING MANAGEMENT, POWER SECTOR
BHARAT HEAVY ELECTRICALS LIMITED-NOIDA

CONTENT

- 1 SCOPE OF THE DOCUMENT
- 2 PURPOSE OF STORAGE & PRESERVATION
- 3 MEASURES TO BE TAKEN FOR STORAGE AND PRESERVATION
 - a) GENERAL STORAGE REQUIREMENTS
 - b) GENERAL PRESERVATION REQUIREMENTS
 - c) GENERAL INSPECTION REQUIREMENTS
- 4 TYPE OF STORAGE FOR VARIOUS EQUIPMENT
5. CONCLUSION
6. STACKING ARRANGEMENT FOR PLATES AND STRUCTURAL STEEL

1. SCOPE OF THE DOCUMENT

This guideline is prepared in intent to provide proper site storage and preservation of the Mechanical, Electrical and C & I items / equipment supplied under various bought out packages/items. This storage procedure shall be followed at different power plant sites by concerned agency for storage and preservation from the date of equipment received at site until the same are erected and handed over to the customer.

2. PURPOSE OF STORAGE & PRESERVATION

Many of the items may be required to be kept in stores for long period. It shall therefore be essential that proper methods of storage and preservation be applied so that items do not deteriorate, loose some of their properties and become unusable due to atmospheric conditions and biological elements.

3. MEASURES TO BE TAKEN FOR STORAGE, HANDLING & PRESERVATION

a) GENERAL STORAGE REQUIREMENTS

1. To the extent feasible, materials should be stored near the point of erection. The storage areas should have adequate unloading and handling facilities with adequate passage space for movement of material handling equipment such as cranes, fork lift trucks, etc. The storage of materials shall be properly planned to minimise time loss during retrieval of items required for erection.
2. The outdoor storage areas as well as semi-closed stores shall be provided with adequate drainage facilities to prevent water logging. Adequacy of these facilities shall be checked prior to monsoon.
3. The storage sheds shall be built in conformity with fire safety requirements. The stores shall be provided with adequate lights and fire extinguishers. 'No smoking' signs shall be placed at strategic locations. Safety precautions shall be strictly enforced.
4. Adequate lighting facility shall be provided in storage areas and storage sheds and security personnel positioned to ensure enforcement of security measures to prevent theft and loss of materials.
5. Adequate number of competent stores personnel and security staff shall be deployed to efficiently store and maintain the equipment / material.
7. The equipment shall be stored in an orderly manner, preserving their identification slips, tags and instruction booklets, etc., required during erection. The storage of materials shall be equipment-wise. Loose parts shall be stored in sheds on racks,

preserving the identification marks and tags in good condition. The group codes shall be displayed on the racks

6. At no time shall any materials be stored directly on ground. All materials shall be stored minimum 200 mm above the ground preferably on wooden sleepers

b) GENERAL PRESERVATION REQUIREMENTS

1. All special measures to prevent corrosion shall be taken like keeping material in dry condition, avoiding the equipment coming in contact with corrosive fluid like water, acid etc.
2. Materials which carry protective coating shall not be wrapped in paper, cloth, etc., as these are liable to absorb and retain moisture. The material shall be inspected and in case of signs of wear or damages to protective coating, that portion shall be cleaned with approved solution and coated with an approved protective paint. Complete record of all such observations and protective measures taken shall be maintained.
3. Generally equipment supplied at site are properly greased or rust protective oil is applied on machined/ fabricated components. However periodic inspection shall be carried out to ensure that protection offered is intact.
4. While handling the equipment, no dragging on the ground is permitted. Avoid using wire rope for lifting coated components. Use polyester slings (if possible) otherwise protective material (e.g. clothes, wood block etc.) should be used while handling the components with rope / slings
5. For Equipment supplied with finished paint, touch paint shall be done in case any surface paint gets peeled off during handling. Otherwise such surfaces shall necessarily be wrapped with polythene to avoid any corrosion. Further for equipment wherein finish coat is to be applied at site, site to ensure that equipment is received with primer coat applied.
6. It shall be ensured by periodic inspection that plastic inserts are intact in tapped holes, wherever applicable.
7. Pipes shall be blown with air periodically and it shall be ensured that there is no obstruction.
8. Silica gel or approved equivalent moisture absorbing material in small cotton bags shall be placed and tied at various points on the equipment, wherever necessary.
9. Heavy rotating parts in assembled conditions shall be periodically rotated to prevent corrosion/jamming due to prolonged storage.

10. All the electrical equipment such as motors, generators, etc. shall be tested for insulation resistance at least once in three months and a record of such measured insulation values shall be maintained.
11. Following preservatives/preservation methods can be used depending upon type of equipment
 - a. Rust preventive fluid (RPF)
 - b. Rust protective paints
 - c. Tarpaulin covers, in case of outdoor storage
 - d. De-oxy aluminate for weld-ments

c) GENERAL INSPECTION REQUIREMENTS

1. Period inspection of materials with specific reference to –
 - Ingress of moisture and corrosion damages.
 - Damage to protective coating.
 - Open ends in pipes, vessels and equipment -
 - In case any open ends are noticed, same shall be capped.
2. Any damages to equipment / materials.
 - In case of any damages, these shall be promptly notified and in all cases, the repairs / rectification shall be carried out.
 - Any items found damaged or not suitable as per project requirements shall be removed from site. If required to store temporarily, they shall be clearly marked and stored separately to prevent any inadvertent use.

4. TYPE OF STORAGE FOR VARIOUS EQUIPMENT

The types of storage are broadly classified under the following heads:

i **Closed storage with dry and dust free atmosphere. (C)**

The closed shed can be constructed by using cold-rolled / tubular components for structure and corrugated asbestos sheets / galvanised iron sheets for roofing. Brick walls / asbestos sheets can be used to cover all the sides. The floor of the shed can be finished with plain cement concrete suitably glazed. The shed shall be provided with proper ventilation and illumination.



ii **Semi-closed storage. (S)**

The semi closed shed can be constructed by using cold-rolled / tubular components for structure and corrugated / asbestos sheets for roofing. The floor shall be brick paved. If required a small portion of sides can be covered to protect components from rainwater splashing onto the components.





iii Open storage (O)

The open yard shall be levelled, well consolidated to achieve raised ground with the provision of feeder roads for crane approach along with access roads running all sides. One part of the open yard shall be stone pitched, levelled and consolidated with raised ground suitable for storing / stacking heavier and critical components with due space to handle them by cranes etc . Adequate number of sleepers, concrete block etc. to be provided to make raised platforms to stack critical materials.

A separate yard to be identified as “scrap yard” slightly away from main open yard to store wooden/steel scraps, which are to be disposed off. This is required to avoid mix up with regular components as well as to avoid fire hazard.

Some of the components, which are having both machined & un-machined surfaces and are bulky, shall be stored in open storage area on a raised ground and suitably covered with water proof / fire retardant tarpaulin.



The equipment listed below shall be stored and inspected as per requirement mentioned in the table below.

Sl. No.	Description of the equipment	Type of Storage	Check for	Remarks
Raw material /mechanical items like pipes, plates, structure sections etc.)				
1.	Steel pipes (lined/unlined)	S	Damage , paint, corrosion, rubber lining peeling	Provide end cap
2.	MS Plates	S	Damage, paint, corrosion	
3.	SS Plates	S	Damage	
4.	Non-metallic pipes	S	Damage, cracks	Provide end cap
5.	Stainless steel pipes	S	Damage ,	Provide end cap
6.	MS sections, beams	S	Damage, paint, corrosion	
7.	Cable trays	S	Damage, condition of preservations	
8.	Insulation sheets	S	Damage	
9.	Insulation	C	Damage, packing	
10.	Hangers Rods	S	Damage, paint, packing	
11.	Tubes	S	Damage, paint , packing	Provide end cap
12.	Hume pipes	O	Damage	
13.	Castings	O	Damage, paint, corrosion	
Fabricated mechanical items (pressure vessels, tanks etc.)				
14.	Pressure vessels (unlined)	O	Damage, paint, corrosion,	Covered nozzles
15.	Atmospheric storage tanks (unlined)	O	Damage, paint, corrosion	Covered nozzles

Sl. No.	Description of the equipment	Type of Storage	Check for	Remarks
16.	Pressure vessels (lined)	S	Damage, paint, corrosion, rubber lining	
17.	Atmospheric storage tanks(lined)	S	Damage, paint, corrosion, rubber lining	
18.	Support structures	O	Damage , paint, corrosion	
19.	Flanges	C	Damage , paint, corrosion	
20.	Fabricated pipes	S	Damage , paint, corrosion	Provide end cap
21.	Vessels internals	C	Damage , paint, corrosion ,packing	
22.	Grills	S	Damage , paint, corrosion	
23.	Angles	S	Damage , paint, corrosion	
24.	Bridge mechanism/clarifier mechanism	O	Damage , paint, corrosion	
25.	Cranes, rails	S	Damage , paint, corrosion	
26.	Stair cases	O	Damage , paint, corrosion	
27.	Ladders/handrails	O	Damage , paint, corrosion	
28.	Fabricated ducts	S	Damage , paint, corrosion	
29.	Isolation Gates	O	Damage , paint, corrosion	
30.	Fabricated boxes/panels	S	Damage , paint, corrosion	
Mechanical components like valves, fittings, cables glands, spares etc.)				
31.	Valves	S	Damage , packing	

Sl. No.	Description of the equipment	Type of Storage	Check for	Remarks
32.	Fittings	S	Damage , packing	Provide end cap
33.	Cable glands	C	Damage , packing	
34.	Tools & tackles	C	Damage , packing	
35.	Nut , bolts, washers,	C	Damage , packing	
36.	Gasket & Packings	C	Damage , packing	
37.	Copper tubes	C	Damage , packing, corrosion	Provide end cap
38.	SS tubing	C	Damage , packing	Provide end cap
Rotating assemblies (pumps, blowers, stirrers, fans, compressors etc.)				
39.	Pumps	S	Damage , packing, corrosion	Shaft rotation
40.	Blowers/Compressors	S	Damage , packing, corrosion	Shaft rotation
41.	Agitators/stirrers/radial launders	C	Damage , packing, corrosion	Shaft rotation
42.	Rollers for chlorine tonner mounting	C	Damage , packing, corrosion	
43.	Centrifuge	S	Damage , packing,	
44.	Gear box	C	Damage , packing, corrosion	
45.	Bearings	C	Damage , packing, corrosion	
46.	Fans	S	Damage , packing, corrosion	
47.	Dosing skids	S	Damage , packing, corrosion	
48.	Pump assemblies	S	Damage , packing, corrosion	
49.	Air washers(INTERNALS)	S	Damage , packing	
50.	Air conditioners (split)	C	Damage , packing	

Sl. No.	Description of the equipment	Type of Storage	Check for	Remarks
51.	Elevators(CONTAINERIZED)	O	Damage , packing, corrosion	
52.	Chillers/VA machines	S	Damage , packing	
53.	Air handling Unit/Package unit	S	Damage , packing	
54.	Chlorinators & Evaporators	C	Damage , packing	
55.	Ejectors	C	Damage , packing	
56.	Electrolyser	C	Damage , packing	
Miscellaneous items like chain pulley blocks, hoists etc.				
57.	Chain pulley blocks	S	Damage, Packing	
58.	Electric hoists	S	Damage, Packing	
59.	Fire extinguishers	C	Damage, expiry date	
60.	Fork Lift Truck	S	Damage, Packing	
61.	Hydraulic Mobile Crane	O	Damage, Packing	
62.	Mobile Pick Up & Carry Crane	O	Damage, Packing	
63.	Motor boats	O	Damage, Packing	
64.	Safety showers	S	Damage, Packing	
65.	Diffusers/dampers	S	Damage, Packing	
Chemicals and consumables (acid, alkali, paints, oils, reagents and special chemicals)				
66.	Hydro Chloric Acid (HCl)	Store in canes/ storage tank in dyke area	Date of production/ leakage/fumes	hazardous chemical
67.	Sulphuric acid (H ₂ SO ₄)	Store in canes/ storage tank in dyke area	Date of production/ leakage/fumes	hazardous chemical

Sl. No.	Description of the equipment	Type of Storage	Check for	Remarks
68.	Sodium hydroxide (NaOH)	Store in canes/ storage tank in dyke area	Date of production/ leakage/ fumes/ breather	hazardous chemical ,breather to be checked for air ingress
69.	Sodium hypo chlorite	To be stored under shed	Date of production/ leakage/ fumes	hazardous chemical ,self-life normally 15-30 days after which strength of chemical decays
70.	Ammonia	S	Date of production/ leakage/ fumes	Store in closed storage tanks, hazardous chemical
71.	CW treatment chemicals	S	Date of production , Self-life	Store in closed canes
72.	RO/UF cleaning chemicals	S	Date of production , Self-life	Store in closed canes
73.	Lime	C	Damage to packing , seepage	Prevent moisture, rain
74.	Alum bricks	C	Damage to packing	Prevent moisture, rain
75.	Poly electrolyte	S		Store in closed storage tanks
76.	Laboratory chemicals(powder)	C	Damage, Packing self-life	
77.	Laboratory chemicals(liquid)	C	Damage, Packing self-life	
78.	Lubrication oils	C	Leakage	
79.	Paints	S	Leakage ,air tightness	
80.	Sand	O	Damage of packing	No hooks
81.	Salt (NaCl)	C	Damage of packing, water ingress	Prevent moisture, rain
82.	Anthracite	S	Damage of packing	
83.	Activated carbon	S	Damage of packing	

Sl. No.	Description of the equipment	Type of Storage	Check for	Remarks
84.	Thermal insulation	S	Damage of packing	
85.	Cement	C	Damage of packing	Prevent moisture, rain
86.	Gravels	O	Damage of packing	
87.	ION exchange resins	C	Damage , packing	Refer manufacturer guidelines
88.	RO membranes	C	Damage , packing	Refer manufacturer guidelines
89.	UF membranes	C	Damage , packing	Refer manufacturer guidelines
90.	Cleaning chemicals	C	Damage , packing	Refer manufacturer guidelines
91.	Chemicals for analysers/calibration	C	Damage , packing	Refer manufacturer guidelines
Electrical and C & I items (motors, cables etc.)				
92.	Motors	C	Damage , packing	
93.	Cable drums	O	Damage	
94.	Control Panel /control desk, UPS ,JB	S	Damage, Packing	
95.	Instruments(gauges/analysers)	C	Damage	
Special items		As per Manufacturer's item, like Hydrogen cylinders, Ozonator, Analyser, Chlorine dioxide generators etc.		

5. CONCLUSION

Concerned storage agency at site should make sure that loss in equipment performance and wear & tear are minimised through proper storage and preservation. The above are broad guidelines and cover major equipment / materials. However specific storage practices shall be followed as per manufacturer recommendation. All the necessary measures even in addition to the ones mentioned above, if found necessary, should be taken to achieve the objective.

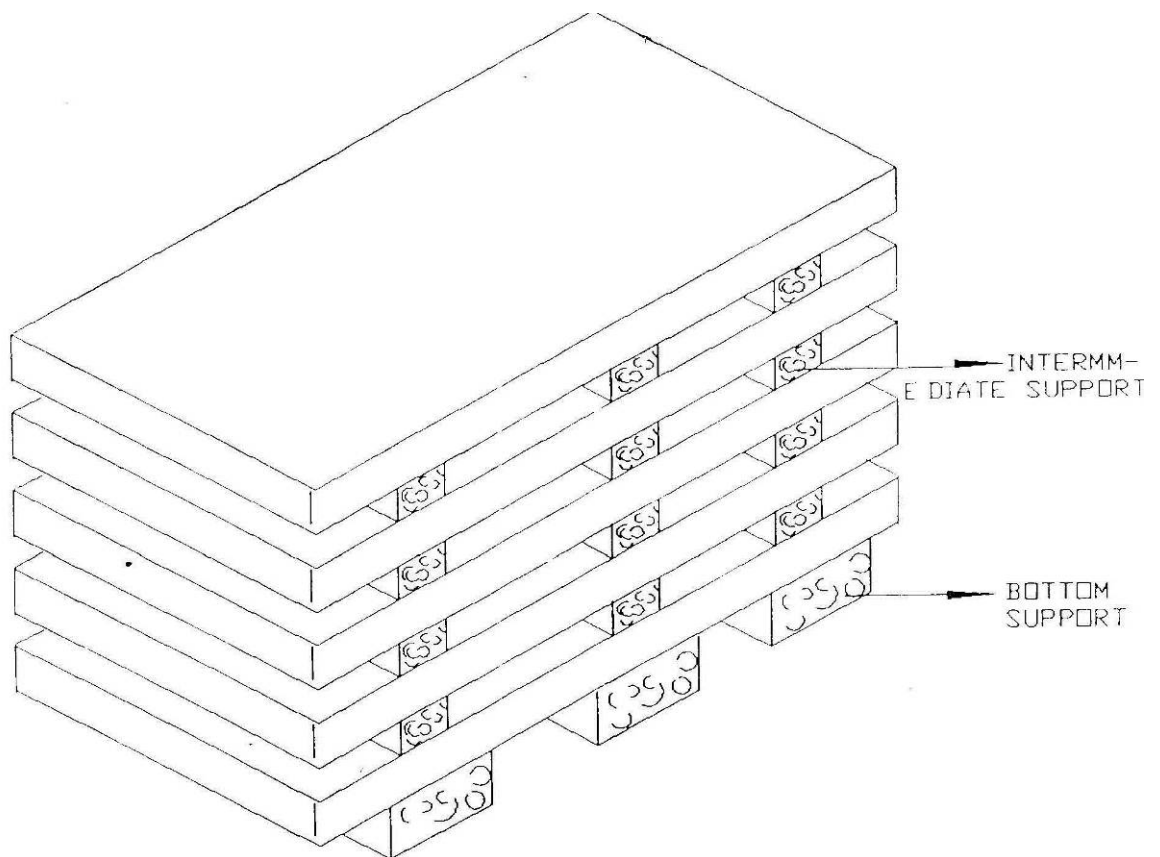


Figure – 1 – PLATE STACKING ARRANGEMENT

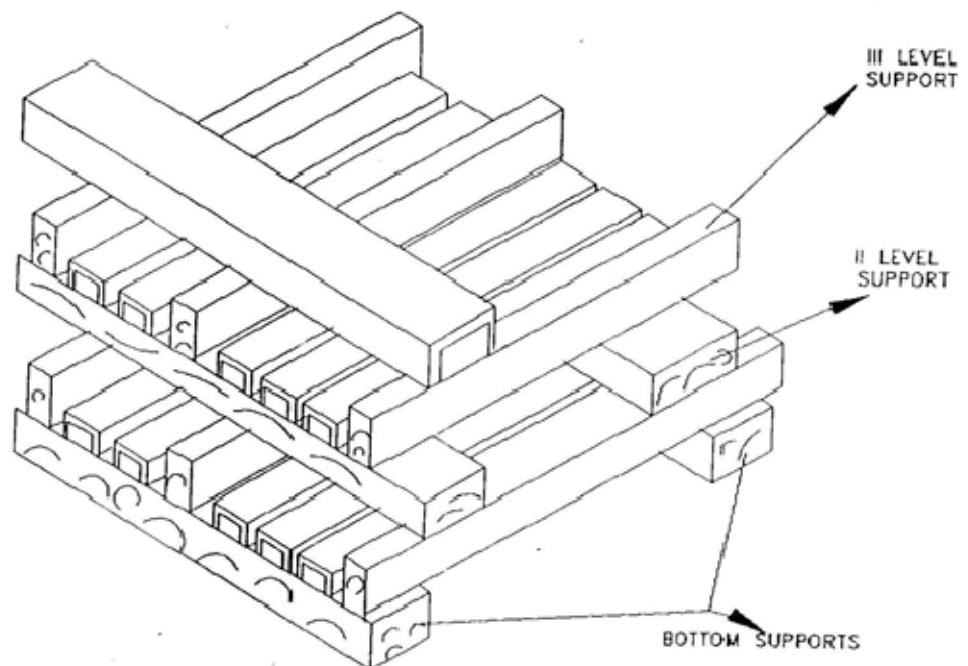


Figure – 2 – STRUCTURAL STEEL STACKING ARRANGEMENT



TITLE
5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS

SPECIFIC TECHNICAL REQUIREMENTS

SPECIFICATION NO. PE-TS-417-167-A002

REV 00

Section -II Date 29.03.18

Page 3 of 1

SUB-SECTION IIC

FORMAT FOR OPERATION AND MANITENANCE

Format for Operation & Maintenance Manual

Project name :

Project number :

Package Name :

PO reference :

Document number :

Revision number :

Sl.no. & Sections	Description	Tick (√)if included in Manual			Remarks
		Yes	No	Not Applicable	
1.	Cover page				
1.1	Project Name				
1.2	Customer/consultant Name				
1.3	Name of Package				
1.4	Supplier details with phone, FAX ,email address , Emergency Contact number				
1.5	Name and sign of prepared by , checked by & approved by				
1.6	Revision history with approval Details				
2.0	Index				
2.1	showing the sections & related page nos All the pages should be numbered section wise				
3.0	Description of Plant/System				
3.1	Description /write up of operating principle of system equipment/ associated sub-systems & accessories/controls system , operating conditions, performance parameters under normal , start up and special cases				
3.2	Equipment list and basic parameter with Tag numbers				
3.3	Data sheets approved by Customer/for information and catalogues provided by original manufacturer				
3.4	Associated other packages and Interface /terminal points				
3.5	P&ID & Process Diagrams				
3.6	GA Layout drawings, As-built drawings , Actual photograph of items/system (Drawings of A2 & bigger sizes are to be attached in the last)				
3.7	Single line/wiring diagrams				
3.8	Control philosophy /control write-ups				

4.0	Commissioning Activities (if not covered in separate document i.e. erection manual, commissioning manual)				
4.1	Pre-Commissioning Checks				
4.2	handling of items at site				
4.3	Storage at site				
4.4	Unpacking & Installation procedure				
5.0	Operation Guidelines for plant personal/user/operator				
5.1	Interlock & Protection logic along with the limiting values of protection settings for the equipment along with brief philosophy behind the logic, drawings etc. to be provided.				
5.2	Start up, normal operation and shut down procedure for equipments along with the associated systems in step by step mode. Valve sequence chart, step list, interlocks etc. with Equipment isolating procedures to be mentioned.				
5.3	Do's & Don't of the equipments.				
5.4	Safety precautions to be taken during normal operation. Safety symbols, Emergency instructions on total power failure condition/lubrication failure/any other condition				
5.5	Parameters to be monitored with normal values and limiting values				
5.6	Trouble shooting with causes and remedial measures				
5.7	Routine operational checks, recommended logs & records				
5.8	Changeover schedule if more than one auxiliary for the same purpose is given				
5.9	Painting requirement and schedule				
5.10	Inspection, repair , Testing and calibration procedures				
6.0	Maintenance guidelines for plant personal				
6.1	List of Special Tools and Tackles required for Overhaul/Trouble shooting including special testing equipment required for calibration etc.				
6.2	Stepwise dismantling and re-assembly procedure clearly specifying the tools to be used, checks to be made, records to be maintained, clearances etc. to be mentioned. Tolerances for fitment of various components to be given.				

6.3	Preventive Maintenance & Overhauling schedules linked with running hours/calendar period along with checks to be given				
6.4	Long term maintenance schedules especially for structural, foundations etc.				
6.5	Consumable list along with the estimated quantity required during commissioning, normal running and during maintenance like Preventive Maintenances and Overhaul. Storage/handling requirement of consumables/self-life.				
6.6	List of lubricants with their Indian equivalent, Lubrication Schedule, Quantity required for each equipment for complete replacement is to be given				
6.7	List of vendors & Sub-vendors with their latest addresses, service centres ,Telephone Nos., Fax Nos., Mobile Nos., e-mail IDs etc.				
6.8	List of mandatory and recommended spare parts list				
6.9	Tentative Lead time required for ordering of spares from the equipment supplier				
6.10	Guarantee and warranty clauses				
7.0	Statutory and other specific requirements considerations.				
8.0	List of reference documents				
9.0	Binding as per requirement				



**5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS**

**DOCUMENTS TO BE SUBMITTED BY
BIDDER**

SPECIFICATION No: PE-TS-417-167-A001

SECTION-III

SUB-SECTION-IIIA

REV 00

DATE 29.03.2018

**SUB SECTION-IIIA
LIST OF DOCUMENTS TO BE SUBMITTED ALONG WITH BID**



**5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS**

**DOCUMENTS TO BE SUBMITTED BY
BIDDER**

SPECIFICATION No: PE-TS-417-167-A001

SECTION-III

SUB-SECTION-IIIA

REV 00

DATE 29.03.2018

DRAWINGS / DOCUMENTS TO BE SUBMITTED WITH THE BID:

Bidder shall submit signed and stamped copy of the following drawings / documents along with their bid

a) Deviation schedule with reference to specific clauses of the specification along with reason for such deviation.

Or

No deviation certificate.

b) Copy of pre-bid clarifications (if any).

c) Compliance cum Confirmation Certificate

d) Un priced copy of price format indicating **quoted/ not quoted** against each row/column along with cost of withdrawal / price implication format for deviations.

f) Supply price percentage breakup.

OFFER WILL BE CONSIDERED AS INCOMPLETE IN ABSENCE OF ANY OF ABOVE DOCUMENTS. DOCUMENT/S OTHER THAN ABOVE, IF ANY, SUBMITTED WITH THE OFFER WILL NOT FORM PART OF CONTRACT AND ACCORDINGLY WILL NOT BE CONSIDERED FOR BID EVALUATION.



**5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS**

**DOCUMENTS TO BE SUBMITTED BY
BIDDER**

SPECIFICATION No: PE-TS-417-167-A001

SECTION-III

SUB-SECTION-IIIB

REV 00

DATE 29.03.2018

SUB SECTION-IIIB

COMPLIANCE CUM CONFIRMATION CERTIFICATE



**5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS**

**DOCUMENTS TO BE SUBMITTED BY
BIDDER**

SPECIFICATION No: PE-TS-417-167-A001

SECTION-III

SUB-SECTION-IIIB

REV 00

DATE 29.03.2018

COMPLIANCE CUM CONFIRMATION CERTIFICATE

The bidder shall confirm compliance with following by signing/ stamping this compliance certificate (every sheet) and furnish same with the offer.

- a) The scope of supply, technical details, construction features, design parameters etc. shall be as per technical specification & there are no exclusions other than those mentioned under "exclusion" in section C and those resolved as per 'Schedule of Deviations', if applicable, with regard to same.
- b) There are no other deviations w.r.t. specifications other than those furnished in the 'Schedule of Deviations'. Any other deviation, stated or implied, taken elsewhere in the offer stands withdrawn unless specifically brought out in the 'Schedule of Deviations'.
- c) Bidder shall submit QP in the event of order based on the guidelines given in the specification & QP enclosed therein. QP will be subject to BHEL/ CUSTOMER approval & customer hold points for inspection/ testing shall be marked in the QP at the contract stage. Inspection/ testing shall be witnessed as per same apart from review of various test certificates/ Inspection records etc. This shall be within the contracted price with no extra implications to BHEL after award of the contract.
- d) All drawings/ data-sheets/ calculations etc. submitted along with the offer shall be considered for reference only, same shall be subject to BHEL/ CUSTOMER approval in the event of order.
- e) The offered materials shall be either equivalent or superior to those specified in the specification & shall meet the specified/ intended duty requirements. In case the material specified in the specifications is not compatible for intended duty requirements then same shall be resolved by the bidder with BHEL during the pre - bid discussions, otherwise BHEL/ Customer's decision shall be binding on the bidder whenever the deficiency is pointed out.

For components where materials are not specified, same shall be suitable for intended duty, all materials shall be subject to approval in the event of order.

- f) The commissioning spares shall be supplied on 'As Required Basis' & prices for same included in the base price itself.
- g) All sub vendors shall be subject to BHEL/ CUSTOMER approval in the event of order.
- h) Guarantee for plant /equipment shall be as per relevant clause of GCC /SCC /Other Commercial Terms & Conditions.
- i) In the event of order, all the material required for completing the job at site shall be supplied by the bidder within the ordered price and within purview of the tender specification even if the same are additional to approved billing break up, approved drawing or approved Bill of quantities.
- j) Schedule of drawings submissions, comment incorporations & approval shall be as stipulated in the specifications. The successful bidder shall depute his design personnel to



**5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS**

**DOCUMENTS TO BE SUBMITTED BY
BIDDER**

SPECIFICATION No: PE-TS-417-167-A001

SECTION-III

SUB-SECTION-IIIB

REV 00

DATE 29.03.2018

BHEL's/ Customer's/ Consultant's office for across the table resolution of issues and to get documents approved in the stipulated time.

- k) As built drawings shall be submitted as and when required during the project execution.
- l) The bidder has not tampered with this compliance cum confirmation certificate and if at any stage any tampering in the signed copy of this document is noticed then same shall be treated as breach of contract and suitable actions shall be taken against the bidder.
- m) All technical deviations (if any) have been indicated in technical deviation schedule. Any commercial deviation/ document shall not be considered during technical evaluation. However, if any issue in the commercial documents / deviation related to technical requirements needs to be highlighted and resolve in technical evaluation only.
No aspect of commercial issues needs to be highlighted / resolved in technical evaluation and their offer is strictly in compliance with technical specification. Any technical deviations (e.g. related to MDL, required documentation etc. for completion of the project) raised by them in commercial deviation either explicit or implicit shall be considered null and void even if agreed by BHEL during commercial evaluation stage.
Bidder agreed to confirm and compliance with technical specification and subsequent clarification on bids during pre- award discussion.



**5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS**

**DOCUMENTS TO BE SUBMITTED BY
BIDDER**

SPECIFICATION No: PE-TS-417-167-A001

SECTION-III

REV 00

DATE 29.03.2018

SUB SECTION-IIIC

PRE-BID CLARIFICATION SCHEDULE



MISCELLANEOUS TANKS

SPECIFICATION NO. PE-TS-STD -167-A001

SECTION-III

~~VOLUME II~~
SUB SECTION-IIIC

REV 00

DATE:29.03.2018

[illegible]

The bidder hereby certifies that above mentioned are the only clarifications required on the technical specification for the subject package.

SIGNATURE: _____

NAME : _____

DESIGNATION:_____

COMPANY: _____

DATE: _____

COMPANY SEAL



**5X800 MW TSGENCO YADADRI TPS
MISCELLANEOUS TANKS**

**DOCUMENTS TO BE SUBMITTED BY
BIDDER**

SPECIFICATION No: PE-TS-417-167-A001

SECTION-III

REV 00

DATE 29.03.2018

SUB SECTION-IIID

SCHEDULE OF TECHNICAL DEVIATION