

TECHNICAL SPECIFICATION
CONDENSER ON LOAD TUBE CLEANING SYSTEM
(COLTCS)

MAHAGENCO
1 X 660 MW BHUSAWAL TPS

Specification No.: PE-TS- 415-165-N002 (REV.01))



BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT
PPEI BLDG., SEC-16A, PLOT NO. 25
NOIDA – 201301 (UP)



TITLE:
**TECHNICAL SPECIFICATION
COLTCS
1 X 660 MW BHUSAWAL
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01
SECTION:
SUB-SECTION:
REV. NO. **00** DATE 15.05.20
SHEET **1** OF **1**

INDEX

THIS TECHNICAL SPECIFICATION CONSISTS OF FOLLOWING SECTIONS:

CONTENTS

SECTION	TITLE
I	Specific Technical Requirements
IA	Specific Technical Requirements (Mechanical)
IB	Specific Technical Requirements (Elec.)
IC	Specific Technical Requirements (C&I)
ID	Data Sheet – A
II	Standard Technical Specifications
IIA	Standard Technical Specifications (Mechanical)
IIB	Standard Technical Specifications (Elec.)
IIC	Standard Technical Specifications (C&I.)
III	Documents to be submitted by Bidder
IIIA	Guarantee Schedule (To be submitted along with the Bid by all Bidders)
IIIB	Compliance Certificate (To be submitted along with the Bid by all Bidders)
IIIC	Data Sheet – B (To be submitted by successful Bidder after award of Contract)

Note : In case there is conflict in different clauses of specification, most stringent clause (as decided by BHEL / end customer) shall be followed, if no specific deviation is taken by bidder and accepted by BHEL during tender stage in that regard.



TITLE:

**TECHNICAL SPECIFICATION
COLTCS**

1 X 660 MW BHUSAWAL

SPECIFIC TECHNICAL REQUIREMENTSSPEC. NO.: **PE-TS-415-165-N002** . Rev 01

SECTION:

SUB-SECTION:

REV. NO. **00** DATE (15.05.20SHEET **1** OF **1****SECTION - I****SPECIFIC TECHNICAL REQUIREMENTS**

- SUB-SECTION IA** - Specific Technical Requirements (Mech.)
SUB-SECTION IB - Specific Technical Requirements (Electrical)
SUB-SECTION IC - Specific Technical Requirements (C & I)
SUB-SECTION ID – Datasheet-A



TITLE: **TECHNICAL SPECIFICATION
COLTCS
1 X 660 MW BHUSAVAL TPS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01
SECTION: **I**
SUB-SECTION: **IA**
REV. NO. **00** DATE 15.05.20
SHEET **1** OF **1**

SUB-SECTION – IA
SPECIFIC TECHNICAL REQUIREMENTS (MECHANICAL)



TITLE:
**TECHNICAL SPECIFICATION
COLTCS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002**. Rev 01

SECTION: **I**

SUB-SECTION: **IA**

REV. NO. **00** DATE 15.05.20

SHEET **1** OF **7**

1.0 GENERAL

1.1 This enquiry covers the design, manufacture, assembly, inspection and testing at manufacturer's and / or his sub-contractors works, proper packing for delivery, installation checks, commissioning, Trail run and PG test for Condenser On-line Tube Cleaning System (COLTCS) with mandatory spares complete with all accessories as per the requirements specified in this specification.

The Condenser On Load Tube Cleaning Systems (COLTCS) complete with all accessories shall conform to the standard technical specifications (Section-II) and Data Sheet-A enclosed herewith. In addition, the requirements of this Section-I including customer specification attached (as applicable) shall also be complied with. However, wherever the details given in Section-II and Data Sheet-A are different, the requirements of Data Sheet-A shall prevail. Similarly, in the event of contradictions between Section-I/ customer specification (as applicable) / Section-II/ Data Sheet-A, the same shall prevail in the order as: customer specification (as applicable), Section-I, Datasheet-A, Section-II. The decision of BHEL shall be final in case of any discrepancy.

Section I consists of 4 Sub-Sections Viz. Sub-Sec. IA, IB and IC for Mechanical, Electrical and C&I respectively and Sub-Sec. ID for Datasheet-A, the requirements of all 4 sub-sections shall be complied with.

1.2 The omission/ addition of specific reference to any component / accessory necessary for the proper performance of the equipment shall not relieve the supplier of the responsibility of providing such facilities to complete the supply within the quoted prices.

1.3 The bids for each project shall be evaluated as per NIT.

1.4 Bidder to quote for items as per price schedule attached in NIT.

2.0 DESCRIPTION OF EQUIPMENTS:

3.0 CONDENSER ON LOAD TUBE CLEANING SYSTEMS (COLTCS):

The condenser on load tube cleaning system (COLTCS) is intended to prevent formation of various forms of fouling and scaling in the condenser tubes. The cooling water system is of closed circuit type with cooling towers or open circuit type as specified. The water analysis is indicated with Datasheet-A.

4.0 SCOPE OF SUPPLY UNDER THE SPECIFICATION IN THE BIDDER'S SCOPE FOR COLTCS.

4.1 The details of COLTCS with quantities, design parameters, size and MOC's as per Data Sheet-A.

4.2 SCOPE OF SUPPLY IN THE BIDDER'S SCOPE FOR COLTCS:

4.2.1 Each set of COLTCS shall comprise following:

- a) One No. Ball Separator at Condenser CW outlet pipe.
- b) One No. Ball recirculation pump with drive motor.
- c) One No. Ball collector.
- d) One No. Manual ball sorter (Bucket type sorter with sieves to manually sort out the undersized balls by shaking the sieved bucket manually) for each set of COLTCS.
- e) Differential pressure measuring system for ball separator.



TITLE:

**TECHNICAL SPECIFICATION
COLTCS
SPECIFIC TECHNICAL REQUIREMENTS**SPEC. NO.: **PE-TS-415-165-N002** . Rev 01SECTION: **I**SUB-SECTION: **IA**REV. NO. **00** DATE 15.05.20SHEET **2** OF **7**

DP measuring system shall comprise of 2 nos. DPT and 1 no. DPG for each COLTCS.

Instrument shall be with Remote seal arrangement. Stubs for DPT and DPG shall be independent.

- f) Ball monitoring system comprising an independent balls recirculation monitor and an independent balls oversize monitor. If bidder is not manufacturing Ball over size monitor, then they can offer other alternatives like automatic ball sorter etc.
- g) Length of Ball separator, Scope of Counter Flange, Nuts, bolts and gaskets shall be as per Datasheet-A. Thickness of body flange and counter flange shall be as per Drg no PE-DG-999-141-MO17 enclosed at enclosures at Annexure-II of Datasheet-A.
- h) For Clarified water: - Complete Pipe work, including interconnection piping, flanges/counter flanges for valves & pipes, bends, fittings, distributors, nozzles and support installation materials shall be in Bidder's scope. Bidder shall finalize the pipework to suit the layout at contract stage in such a way that no site welding is required for his pipework otherwise the same shall be carried out by bidder at site.
- i) The Electrical and C&I item / accessory as specified in succeeding clause/ respective sections herein.
- j) Power and Control cables between starter Panel (Switch Gear) and various drives in bidder's scope of supply.
- k) Starter Panel (Switch Gear Panel) shall be as follows:

For each Unit, each side of COLTCS system- Left & Right, shall be supplied with its separate local control cum starter /Switch Gear panel with its MIMIC and annunciator for its operation. Extent of MIMICs and annunciators shall be decided during detailed engg.

Switch Gear Panel should have suitable arrangement like Bus Coupler for providing redundancy to incoming supply feeder (1Working + 1 Standby feeder).

- l) Control cables between field instruments and Switch gear panel.
- m) All the field instruments stipulated in this specification shall be in Bidder's scope.
- n) Commissioning balls and other commissioning spares on "As required basis" and to be supplied at the time of commissioning of COLTCS system.
- o) Balls required for Performance Guarantee test on "As required basis" and to be carried at the time of PG test of COLTCS system.
- p) Set of mandatory spares as indicated in Data Sheet A. Spare balls (if applicable) to be supplied at the time of commissioning of COLTCS system.
- q) Supporting arrangement complete with saddle support, foundation plates, anchor bolts, nuts, sleeves, inserts, all installation materials, fixing bolts, clamps and other accessories etc. for complete equipment supplied under this package.
- r) Finish paints for touch up painting of equipment after erection at site, in sealed containers.



TITLE:
**TECHNICAL SPECIFICATION
COLTCS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01
SECTION: **I**
SUB-SECTION: **IA**
REV. NO. **00** DATE **15.05.20**
SHEET **3** OF **7**

- s) Set of special tools and tackles if required for maintenance and erection of the equipment supplied.
- t) Various drawings, data test reports/ certificates instruction manuals for erection operation and maintenance etc. as specified in Data Sheet-C. and cables schedule indicating BOQ for power & control cables.
- u) Panels & Instruments: Scope and Type as specified in C&I section wherever required.

Any item not specified but required to make COLTCS a complete package shall also be in bidder's scope.

5.0 SCOPE OF SERVICES INCLUDED IN THE BIDDER'S SCOPE:

The bidder's scope also includes following services at site, for scope under this specification for COLTCS:

- a) Installation checks (Erection in BHEL's scope).
- b) Commissioning of equipment.
- c) Trial run for requisite period
- d) Performance Testing.

The trial run of equipment shall be generally conducted immediately after commissioning while PG testing shall be conducted at a later date. These activities for different units shall be timed separately.

- **For drawings/documents approval**

In the event of order all drawings / documents in soft as well as hard copy shall be submitted as per cl. 10.0 (b) below.

Further on receipt of Customer comments, if required bidder's engineer shall visit BHEL/ Customer along with soft copy to resolve all issues and incorporate comments in the soft copy for across the table finalization and Category-I approval.

- **Site Visits for Installation Check, Commissioning, Trial Run & PG Testing:**

Bidder to consider cost of two site visits for three days each for installation check / commissioning of COLTCS for each unit i.e for 2 nos of COLTCS system.

Bidder to consider cost of two site visits for twenty days each for trial run and PG Testing of COLTCS for each unit i.e for 2 nos of COLTCS system.

In case of non-completion of above activities in site visits stipulated above, for any reasons not attributable to vendor, vendor shall complete above activities in subsequent site visits for which cost shall be borne by BHEL on pro-rata basis on price of site visit quoted by bidder in price schedule. BHEL Site Certification is mandatory for extra stay at site.

6.0 EXCLUSIONS:

The following are excluded from the bidder's scope.

- 6.1 Civil foundation works required for installation
- 6.2 Erection of Equipment at site.



TITLE:
**TECHNICAL SPECIFICATION
COLTCS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01
SECTION: **I**
SUB-SECTION: **IA**
REV. NO. **00** DATE 15.05.20
SHEET **4** OF **7**

7.0 DESIGN CONSTRUCTION:

In addition to the requirements of Section-IIA the following shall also be complied.

- 7.1 Layout Piping Arrangement Drg. is enclosed in the specifications at Annexure-III of Datasheet-A.
- 7.2 Thickness of body flange and counter flange of COLTCS shall be as per Drg no PE-DG-999-141-MO17 enclosed at enclosures at Annexure-II of Datasheet-A.
- 7.3 The materials of construction specified in Data Sheet-A are minimum requirements and materials of construction for other components not specified shall be similarly selected by the bidder for the intended duty which shall be subject to purchaser's approval during detailed engineering in the event of order.
- 7.4 Housing/ body of COLTCS shall be designed and manufactured as per the applicable codes for pressure vessels and to take care of force and moments as enclosed in the specification. However, in no case thickness of housing/ body shall be less than connecting pipe thickness as specified in Data Sheet-A of COLTCS.
- 7.5 Adequate provision for future installation of Cathodic Protection for COLTCS (Sacrificial type) shall be kept by the bidder in the equipment.
- 7.6 Flow straightener for streamlining the CW flow in balls collecting strainer if required shall be supplied by the bidder along with mounting arrangement and the fixing details.
- 7.7 Velocity in the pipe work shall be less than 1.5 m/ sec for pump suction and less than 2.5 m/ sec. in other pipe work. All valves upto 150 NB shall be ball valves. For higher sizes, gate/ globe/ B.F. valves shall be provided. All instrument valves shall be needle valves.

8.0 Performance Guarantee and Bid Evaluation criteria for Condenser on Load Tube Cleaning System.

Performance Parameters to be guaranteed by bidders under demonstration category under compulsory corrections shall be as under:

- i) Percentage recovery of balls (min. 90% recovery for 1000 hrs of normal plant operation with 8 hrs Operation of COLTCS per day).
- ii) Life of Sponge Rubber Ball (Min. 3 weeks with 8 hrs operation of COLTCS per day).
- iii) Max. Pressure drop in ball separator in clean condition (Test to be conducted along with commissioning) – not exceeding 0.2 MWC. The Bids shall be technically rejected for pressure drop quoted higher than 0.2 MWC.

Any deviation to above balls life, percentage recovery and pressure drop will not be accepted.

In case the successful bidder fails to demonstrate any of these parameters he shall carry out modifications at his own cost, to purchaser's approval.

In case bidder fails to demonstrate above parameters to purchaser's satisfaction even after modification carried by him at site, the purchaser has the right to reject the equipment out rightly.



TITLE:
**TECHNICAL SPECIFICATION
COLTCS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01
SECTION: **I**
SUB-SECTION: **IA**
REV. NO. **00** DATE 15.05.20
SHEET **5** OF **7**

9.0 SPARES:

9.1 Mandatory Spares

Mandatory Spares shall be as per Data Sheet-A or annexure enclosed with data sheet A.

10.0 Quality Plan

Bidder shall submit QP in the event of order based on the guidelines given in the specification & QP enclosed therein. QP will be subject to BHEL/ Customer approval and customer hold points for inspection/ testing shall be marked in the QP at the contract stage. Inspection/ testing shall be witnessed as per same apart from review of various test certificates/ Inspection records etc. Charges for 3rd party inspection (TUV/ equivalent) for imported components wherever required shall be included by bidder in the base price itself. If BHEL or BHEL customer decides to witness the tests along with third party, the cost of travel of BHEL or BHEL customer shall be borne by BHEL or BHEL customer themselves.

11.0 DELIVERY & DRAWINGS/ DOCUMENTS DISTRIBUTION SCHEDULE:

- a. Delivery of Equipment shall be as per NIT.
- b. The drawings to be submitted by bidder in event of award of contract.

BHEL DRG NO	DRG TITLE
PE-V2-415-165-N001	P&ID OF COLTCS SYSTEM
PE-V2-415-165-N002	TECHNICAL DATA SHEET-COLTCS
PE-V2- 415-165-N003	INSTALLATION PLAN- COLTCS
PE-V2- 415-165-N004	GENERAL ARRANGEMENT OF BALL SEPARATOR
PE-V2- 415-165-N006	C&I Part-I, PANEL-TDS, I/O LIST, CABLE SCH & CONTROL PHILOSOPHY
PE-V2- 415-165-N008	QP-COLTCS
PE-V2- 415-165-N005	DETAILS OF BR SKID, BALL INJECTION PIPE, FIXING DETAILS
PE-V2- 415-165-N007	C&I PART-II, GA & WIRING DIAGRAM OF PANEL-COLTCS
PE-V2- 415-165-N009	O&M MANUAL-COLTCS

Drawings submitted shall be complete in all respects with revised drawing submitted incorporating all comments. Any incomplete drawing submitted shall be treated as non-submission with delays to bidder's account. For any clarification/ discussion required to complete the drawings, the bidder shall himself depute his personal to BHEL for across the table discussions/ finalizations/ submissions of drawings.



TITLE:
**TECHNICAL SPECIFICATION
COLTCS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01
SECTION: **I**
SUB-SECTION: **IA**
REV. NO. **00** DATE 15.05.20
SHEET **6** OF **7**

12.0 The makes of various bought out items shall be subjected to approval of Customer/ BHEL in the event of order.

13.0 It is mandatory for the bidders to submit along with the bid the deviations if any whether major or minor in the schedule of deviations only. ***In the absence of deviations listed in the schedule of deviations the offer shall be deemed to be in full conformity with the specification "non-withstanding" anything else stated elsewhere in bidder's offer, data sheets etc. The implied/ indirect deviations in data sheets etc. Shall not be binding on the purchaser.***

14.0 The following documents shall be furnished by the bidder with his offer:

- Compliance certificate duly signed and stamped (Enclosed at section-III).
- Guarantee schedule duly signed and stamped (Enclosed at section-III).
- GA drawings of following with empty/ filled-ups.
 - Balls Collecting Strainers (as applicable).
 - Balls recirculating Skids.
 - Other equipments considered necessary for Layout/ Civil.
- Electrical Load Data (Enclosed at section-1B of Specification)
- Schedule of Deviation (As per NIT format)

The bidder to note that load requirement furnished and finalized during tender stage shall only be provided by BHEL and any changes or additional requirement of Electrical load by bidder during contract stage shall be provided by BHEL with cost repercussions to the bidder.

NOTE: Apart from above, no other drawing/ document/ data sheet etc. shall be submitted along with the offer. If any drawing/ document etc. is submitted with the offer, same shall be considered as for 'Reference' purpose only and shall not be reviewed/ commented upon and any deviation, exclusion to scope, etc. taken in documents but not highlighted in the deviation schedule shall not be taken cognizance of.

15.0 COLTCS packing procedure before dispatch

The purpose of this procedure is to outline the requirements and procedures for protecting the equipment's during shipment and preserving during the storage.

15.1 Preparation for Packing:

- After hydro testing, operation, all fluids e.g. water etc., shall be completely drained from all COLTCS's parts, and the equipment blown dry.
- All material shall be cleaned internally and externally to remove, scale, rust fillings and any other foreign material.
- The COLTCS shall be placed on a strong wooden base & bolted to the wooden base using the foundation holes for further transportation up to site.

15.2 Protection of parts:

- BALL SEPARATOR) shall be packed in properly in high grad bubble plastic wrap for transportation, and long storage at site.
- Actuators shall be packed in separate wooden box of proper sizes.



TITLE:
**TECHNICAL SPECIFICATION
COLTCS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01
SECTION: **I**
SUB-SECTION: **IA**
REV. NO. **00** DATE 15.05.20
SHEET **7** OF **7**

- COLTCS items (EXCEPT BALL SEPARATOR) shall be packed in proper sizes of wooden cases. High grade woods like Rubber woods, jungle wood, hard wood, mango wood, pine wood, etc. is used for packing.
- Loose material, & Electrical & Electronics items shall be packed in corrugated box and plastic bags with proper tagging and marking of handle with care in proper sizes of wooden cases
- All finished (or) machined (External C.S. Surfaces shall be protected against corrosion with corrosion resisting coating, which is easily removable (Compound shall be such that it will remain on the surface at temperature normally encountered during shipping & storage).
- All machined surfaces shall be protected from mechanical damage. All external unfinished carbon steel surfaces shall be sand blasted & shall be coated with rust preventive primer.
- Flanged opening if any shall be covered with blank flanges sealed with blank gasket of natural rubber or equivalent. Butt welded opening shall be closed with temporary closing covers. Internal threads shall be protected with metal plug sealed with Teflon tape (if applicable). External thread shall be protected with PVC sleeve.
- Wooden cases shall be covered with HDPE cloth from inside wooden box and the top. All the opening in COLTCS shall be closed properly by suitably covering to prevent foreign material entering in COLTCS.
- All fabricated wooden cases & crates conform to the requirement as per table given below:

Gross Weight [Kgs.]	Board Thickness	Batton / Rafter Thickness
2000 to 9000	Min. 30 mm	Min. 35 mm
9000 to 18000	Min. 50 mm	Min. 35 mm

- All the equipment shall be protected for entire period of dispatch, storage and erection against corrosion, incidental damage due to vermin, sunlight, rain, high temperature, humid atmosphere, rough handling in transit and storage. All MS parts which are not painted shall be provided with coating of grease.
- Clay Desiccant or such other moisture absorbing material in small cotton bags shall be placed and tied at various points on the equipment, wherever necessary.

15.3 Preservation

The equipment's shall be stored under closed/open space in packed condition until installation. The packages containing loose items are to be protected from extreme climatic conditions.

15.4 Photographs

Bidder to take photographs of all parts like Ball separators, screen, pumps, piping, valves, instruments, actuators, panel (inside & outside) and sent to engineering deptt along with all inspection reports before final dispatch.

16.0 Following to be complied by the bidder:

- Supplier to submit detailed 'Bill of Material' (BoM) at the time of drawing/document submission after placement of PO. Each item of the BoM to be uniquely identified with item code no. or item serial no.
- Supplier to ensure that all items which will find separate mention in the packing list are covered in this detailed BoM.
- Supplier to give following undertaking in the BoM"

"The BoM provided herewith completes the scope (in content and intent) of material supply under PO no.-----, dated____. Any additional material which may become necessary for the intended application of the supplied items(s)/package will be supplied free of cost in most reasonable time."

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 231 of 308

1.0 SCOPE OF WORK

The scope of supply under On Line Condenser Tube Cleaning System for Condenser shall be as below. Items not mentioned but deemed necessary by the Bidder for making the system completely reliable and efficient shall also be included along with mandatory spares.

1.1 Condenser On Line Tube Cleaning Systems shall include but not be limited to the following:

1.1.1 One (1) Ball separator on the C.W. outlet pipes. The Ball separator shall consist of Carbon Steel flanged shell, ball separator screens, ball extraction arrangement, drive unit for actuation of screens, differential pressure measuring system etc.

1.1.2 One (1) ball re-circulation unit complete with pumps, drive motors, ball collectors, etc.

1.1.3 One (1) Ball Re-circulation Monitor and ball injection arrangement with nozzles.

~~1.1.4 One (1) Debris Filter in the C.W. inlet lines. Debris Filter shall consist of Carbon Steel flanged shell, filter screen, debris flushing and extraction assembly, drive units for operation of debris flushing assembly, differential pressure measuring system etc.~~

~~1.1.5 One (1) set of debris flushing and discharge system complete with flushing pumps, drive motors, debris discharge butterfly valves with electric actuators, etc.~~

1.1.6 All interconnecting pipes with necessary valves, fittings, pipe supports etc. for connecting ball separator section to ball re-circulating skid, re-circulating skid to injection point, ~~Debris Filter to debris discharge point~~ on the C.W. outlet pipes at down stream of ball separator, all integral piping for ~~debris flushing system~~ and ball re-circulating skid, drain line, vent line, drain collectors (floor level), sample points with suitable valves etc.

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 233 of 308

2.0 CODES AND STANDARDS

The design, material, construction, manufacture, inspection, testing and performance of Condenser On Line Tube Cleaning System and Debris Filter for Auxiliary system and associated equipment shall comply with the latest edition of all currently applicable standards, statutory regulations and safety codes in the locality where the equipment will be installed. Nothing in this specification shall be construed to relieve the Bidder of his responsibility. In case of conflict between the standards, stringent specifications out of these standards shall govern, whereas in case of conflict between the standards and this specification, requirements of this specification shall govern. Other National standards are acceptable if they are established to be equal to or superior to the listed standards. In all such cases, however, copies of English translation of such National standards shall be attached to the tender. The tenders not complying with this requirement are liable for rejection.

The design, materials requirement, manufacture, testing and performance requirements of the Condenser On Line Tube Cleaning System shall conform to the latest edition of the following codes, standards, specification and regulation:

- (a) Standards of the Hydraulic Institute of USA.
- (b) PTC 8.2 : Power Test Codes - Centrifugal pumps.
- (c) ASME Section VIII: Pressure Vessel Code , 2001
- (d) ASTM - American Society for Testing & Materials.
- (e) American National Standards (ANSI) on -
 - (i) Steel Pipe Flanges and Flanged Fittings (B 16.5)
 - (ii) Steel Fittings S.W. and Threaded (B 16.11)
 - (iii) Butt welding ends-Pipe, valves, & fittings (B16.25).

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 234 of 308
(iv) Valves – Flanged, Threaded and Welding End (B 16.34) (f) American Society for Non Destructive Testing (SNT-TC-1A) (g) NEMA : National Electrical Manufacturer's Association (h) OSHA : Occupational Safety and Health Act (i) IEEE : Institute of Electronics and Electrical Engineers (j) ISA : Instrument Society of America Other standards such as IEC, VDI, DIN, BS, IS etc. shall also be accepted subject to the Owner's approval for which the Bidder shall furnish along with the bid adequate information to justify that these standards are equivalent or superior to the standards mentioned above. For such alternate standards, which are not normally published in English, bidder shall also furnish a complete translation for them. Technical requirements of the Condenser On Line Tube Cleaning System have been indicated in the Datasheet-A. In case of any contradiction between the above standards and data sheets, the stipulations in the data sheet shall prevail and shall be binding on the Contractor. 2.1 <u>GENERAL DESCRIPTION</u> For maintaining degree of cleanliness of the condenser tubes, this on load ball re-circulation type tube cleaning system and debris filters at CW inlet line to condenser will be employed. The on line condenser tube cleaning system shall maintain a circulation of resilient balls in a closed loop through the condenser tubes. Thus, while passing through the tubes, the balls get deformed thereby cleaning the inner surface of the tubes. The balls will be injected at the C.W. inlet pipe by ball recirculation pumps, which subsequently will be distributed evenly throughout the cross-section of the condenser tube sheet to effect uniform cleaning of tubes. The balls after passing through the tubes will be taken out of the C.W. outlet pipes. The balls are then led to the C.W. inlet pipe once again for recirculation.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 235 of 308

3.0 DESIGN AND MANUFACTURING / CONSTRUCTION REQUIREMENT

3.1 DESIGN CONSIDERATIONS

The On Line Condenser Tube Cleaning System shall overcome fouling, scaling and clogging of tubes caused by sludge, corrosion products/micro-organisms etc. which may result due to increased cooling water temperature and reduction in heat transfer co-efficient particularly due to disturbances in the calcium-carbonate, carbon-dioxide equilibrium as well as by precipitation of calcium carbonate, silicate, calcium sulphate, magnesium salts etc.

Equipment/works offered shall be designed for high availability, high reliability, low maintenance and ease of operation & maintenance. The Bidder shall specifically state the design features incorporated to achieve high degree of reliability, availability, operability and ease of maintenance. He shall also furnish details of availability records in plants stated in his experience list.

All similar parts of the equipment shall be made to gauge and shall be interchangeable with and shall be made of same material and workmanship as the corresponding parts of the equipment. Wherever feasible, common components shall be employed in different pieces of equipment in order to optimize the spares inventory and utilization.

3.2 GENERAL PERFORMANCE REQUIREMENT

3.2.1 Performance requirements of the Tube Cleaning System and Debris Filter covered by this specification are as follows :

- (a) The cleanliness of the condenser tubes utilising continuous operation of the system such that the contribution of the tube waterside fouling to the variation of the condenser vacuum from its design value is negligible.

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 236 of 308
(b) The pressure drop across the ball separator screens and debris filter screens during normal cleaning operation shall be minimum (it should not be more than 30 millibar). (c) In the automatic system, sequential operations of various equipment in tube cleaning system must be performed in such a manner that there is absolutely no loss of balls during any cleaning or washing mode of operation of the system. (d) The On Line Condenser Tube Cleaning System shall perform satisfactorily under the specified flow indicated in the technical specification (in the Condenser) and shall be capable of removing the various forms of fouling and scaling from Condenser tubes. The Condenser back pressure/overall heat transfer co-efficient shall be guaranteed to the close limits as specified as long as the tube cleaning system is in operation. (e) The quantity of cleaning balls worn out and/or lost shall be as minimum as possible. The quantity of cleaning balls required for an operating period of one year shall be guaranteed. (f) Bidder shall prove the guaranteed performance figures during the performance testing. The performance testing of the complete tube cleaning system will be done at site after its installation after twelve months from the initial trial. (g) The Owner will do the mechanical and chemical cleaning of the condenser when On Line Condenser Tube Cleaning System is to be commissioned and put into service for the first time. At this stage, the cleanliness of the Condenser tube shall be assumed as 100%. This will ensure that Condenser tubes are in clean condition when On Line Condenser Tube Cleaning System is commissioned. (h) The temperature difference between condensate & C.W. outlet shall be measured at the time of commissioning of the system after its operation is established. On completion of twelve months operation, when the ambient condition will be more or less same as at the time of commissioning the temperature difference between condensate & C.W. outlet will be measured and should be the same		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 237 of 308
	as it was at the time of commissioning, with similar ambient temperature conditions. (i) The Owner shall conduct the performance guarantee test in presence of the bidder immediately after completion of guarantee period, but in any case, not later than six weeks after the expiry of guarantee period. (j) The schedule for taking the performance guarantee test shall be mutually agreed between Owner and the bidder. Any extension in the period beyond six weeks for completing performance guarantee test shall have to be mutually agreed to. (k) The Contractor shall prove the guaranteed performance figures during the performance guarantee test. 3.2.2 Demonstration of Performance of the system Before commissioning and putting the On Line Condenser Tube Cleaning System into service for the first time, the Owner shall do the mechanical and chemical cleaning of the Condenser tubes. This will ensure that condenser tubes are in 100% clean condition. (a) During the trial operation the temperature difference between condensate and CW outlet shall be measured after putting the unit on full load. The cleanliness of the condenser tubes shall be considered as 100% at this stage. The operation of this system may be continuous/intermittent as mutually decided by the Owner and Contractor. On completion of twelve months operation of On Line Condenser Tube Cleaning System, when the ambient conditions will be more or less same as at the time of commissioning of the system, the temperature difference of condensate and CW outlet will be measured and should be same as it was at the time of commissioning, with similar ambient temperature conditions. If the guarantees specified are not achieved by the Contractor, then the Contractor shall be given an opportunity to improve upon the	

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 238 of 308
	performance & the performance shall be checked again after the corrections are carried out. If even after carrying out corrections in the system, the performance is not satisfactory, then the plant stands rejected. (b) During trial operation, the cleanliness factor shall be calculated on the basis of the ratio of the heat transfer rate obtained with the tube cleaning system in service for 12 months and the available Heat transfer rate at the time of commissioning (condenser tubes at 100% clean condition) of the system with similar ambient temperature conditions. Heat Transfer rate will be calculated as per the standard formula for the steam surface condenser. Before commissioning and putting the online condenser tube cleaning system into service for the first time, the Owner shall do the mechanical and chemical cleaning of the condenser tubes. This will ensure that condenser tubes are in clean condition and heat transmission rate will be calculated and will be denoted by U_f. The operation of this system may be continuous/intermittent as mutually decided by the Owner and the Contractor. On completion of 12 months operation of On Line Condenser Tube Cleaning System when the ambient conditions will be more or less similar to conditions as at the time of commissioning of the system, the heat transmission rate will be calculated and will be denoted by U_o. The ratio of U_o/U_f will be calculated for the cleanliness factor C_f. The plant stands rejected in the C_f is observed to be less than 85%. (c) The performance guarantee test shall be conducted by the Owner in presence of the Contractor immediately after completion of guarantee period but in any case not later than 6 weeks after the expiry of guarantee period. The schedule for taking the performance guarantee test shall be mutually agreed between the Owner and the Contractor. Any extension in the period beyond six weeks for completing performance guarantee tests shall have to be mutually agreed to.	

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 239 of 308
3.3 <u>CONSTRUCTIONAL FEATURES</u> 3.3.1 General Unless inconsistent with this specification, the supplier's standard or usual construction is desired. The equipment shall be capable of safe, reliable and continuous operation at all conditions of circulating water flow through the condenser tubes maintaining the design cleanliness factor of the tubes. 3.3.2 Ball Separator The design of the ball separator section shall aim at the maximum rigidity of the screens by adequate stiffening bars. The construction of the ball extraction area shall ensure smooth and reliable removal of the balls out of the separator section. The separator shall have flanged ends and flange drilling shall conform to AWWA C207 standard. 3.3.3 Ball Collector The size of the ball collector shall be determined by the number of condenser tubes coming per path, the relevant ball circulation frequency and the cleaning ball diameter. The integral non-return flap shall ensure no reverse flow in case of ball recirculation pump-motor failure thereby avoiding any loss of balls. 3.3.4 Ball injection system The design of the injection system shall be such that it performs an even distribution of requisite cleaning balls at the C.W. inlet pipe so that each condenser tube receives a cleaning ball regularly at fairly short intervals.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 240 of 308

3.3.5 Cleaning balls

Resilient balls of proper hardness and correct size shall be selected based on factors like tube material, nature of fouling expected, tube internal diameter and desired service life of the balls.

Only a single type of ball to cater for the entire range of tube fouling may not adequate. The supplier shall furnish different types of balls as required in sufficient quantities to take care of all possibilities like (a) normal maintenance of tube cleanliness when function of the ball is more of that of polishing than removing of scales (b) removal of comparatively hard scale formed due to non-availability of the tube cleaning system for reasons like failure of the system, long shutdown of the generation unit, etc.

3.3.6 Schedule of Materials

Materials of construction of various components of equipment covered by this specification shall be as per data specification sheet.

In selecting materials of construction of equipment, the Contractor shall pay particular attention to the atmospheric conditions existing at the Site and the nature of material/fluid handled. Wherever deviations are taken in respect of materials specified, the reasons shall be spelt out clearly in the proposal.

All materials shall be new, and shall be of the quality most suited to the proposed application.

In as far as is possible, materials shall be in accordance with national or international standard specifications and shall be used in accordance with national or international codes of practice. Where such standards or codes of practice are not available sufficient information shall be provided to allow the owner to assess the suitability of the material for the particular application.

All materials used shall have demonstrated lengthy satisfactory service in similar or more arduous conditions to those proposed by the Contractor.

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 241 of 308

3.3.7 Drive Motor

Drive motor and actuators for valves and screen shall be as per **Volume IV** of this specification.

3.4 INSTRUMENTATION AND CONTROL

Operation of the condenser on line tube cleaning system and debris filters with necessary audio/visual alarm/indications shall be initiated locally by the Programmable Logic Controller based Control Panel. The system shall be controlled from the local control panel, either in 'Auto' or 'Manual' mode, by means of a selector switch. Following are the major control logics to be provided for operation of the automatic tube cleaning system. However, the bidder may offer additional control features also, if considered necessary by him for smooth and trouble-free operation of the system. Provision for manual over-ride of any automatic operation shall be made available in the panel. Potential free contacts for START/STOP signal interfaces with the MCC shall be provided.

3.4.1 Start-up of the cleaning system after manually feeding the requisite number of balls into the collector :

The above operation & control will be achieved through steps like setting the selector switch on local control panel to "Auto" mode and pressing the push button to "system ON". Other steps will follow sequentially viz. tilting of the screens in the strainer section to "ball circulating position", starting of recirculation pump, turning the ball catching flap in the collector to "ball circulation" position, etc. In case of manual mode, all steps will be achieved manually by operating the corresponding push buttons.

3.4.2 Automatic shut-down of the cleaning system either periodically or as per operator's requirement by pressing the push button from the local control panel.

Under "Auto" mode, pushing of "System OFF" push button shall initiate the above operation, through steps like turning the ball catching flap in the collector to "ball catching" position, stopping the recirculation pump after a set period.

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 242 of 308
3.4.3 Monitoring of strainer section screen fouling by differential pressure measuring system. 3.4.4 Indicators & Alarms The following minimum indications shall be provided: (a) Tube cleaning system ON-OFF (b) Pump ON-OFF (c) “Screen Operation” (d) DP High-Normal (e) Various failure positions The following minimum alarms shall be provided: (a) Pump tripped (i) DP - high and very high (ii) Screen Actuator failure The above list of logics is not exhaustive and the supplier shall provide all other control logics required for the safe and trouble-free operation of the system. Necessary interlocks, (e.g. recirculation pump will not run if the strainer section is in 'screen wash' position) for proper operation of the system shall also be provided. The supplier shall furnish the write-up and logic diagrams for interlock and protection. 4.0 <u>OPERATING CONDITIONS / REQUIREMENTS</u> 4.1 <u>OPERATIONAL FEATURES</u> The Tube Cleaning System shall be semi automatic and shall be operated from local control panels.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
	REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES

4.2

BALL SEPARATOR STRAINER SECTION AND DIFFERENTIAL PRESSURE MEASURING SYSTEM

During the normal cleaning mode the screens shall allow the circulating water leaving the condenser to pass through with very little pressure drop across the screens. However, the cleaning balls coming out of the condenser tubes will be prevented from escaping. These balls will get collected over the separator screens and are extracted from the strainer section and pumped back to the system for re-cycling.

Whenever the pressure drop across the strainer, as sensed by the differential pressure measuring system, exceeds a pre-set limit, annunciation shall appear in the local panel.

4.3

RECIRCULATION PUMP AND INJECTION NOZZLES

The recirculation pump will extract the balls from the ball separator strainer section and push them through the ball collector to the ball injection nozzles. The ball injection nozzles shall point against the direction of the C.W. flow for better ball distribution.

5.0

DRAWINGS, DATA AND MANUALS

5.1

For Drawing, Data and Information required along with BID, please refer **Volume VIII.**

 MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 245 of 308

CONDENSER ON LINE TUBE CLEANING SYSTEM AND DEBRIS FILTER
DATASHEET – A

<u>SR. NO.</u>	<u>ITEM</u>	<u>UNITS</u>	
1.0	<u>CONDENSER DATA</u>		
1.1	Number of condensers		As per TG manufacturer's system design/configuration
2.0	<u>MATERIAL OF CONSTRUCTION</u>		
2.1	<u>BALL SEPARATOR SECTION</u>		
(a)	Separator shell flanges		Carbon Steel
(b)	Separator shell		Carbon Steel
(c)	Internals		SS 316
(d)	Bolts & nuts in contact with circulating water		SS 316
2.2	<u>BALL RECIRCULATION PUMPS & DEBRIS FLUSHING PUMPS</u>		
(a)	Casing/ impeller		CI / SA 351 CF8M
(b)	Shaft		SS 316
2.3	<u>BALL COLLECTOR</u>		
(a)	Housing		Stainless Steel
(b)	Internals		SS-316
2.4	<u>DEBRIS FILTER</u>		
(a)	Debris Filter shell		Carbon Steel

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES		Page 246 of 308
<u>SR. NO.</u>	<u>ITEM</u>	<u>UNITS</u>	
(b)	Debris Filter shell flanges		Carbon Steel
(c)	Screen basket		SS 316
(d)	Bolts & nuts in contact with circulating water		SS 316
2.5	<u>BALL VALVES</u>		
(a)	Body		SA 351 CF8M
(b)	Ball		SA 351 CF8M
(c)	Stem		SS 316
2.6	<u>INTERCONNECTING PIPING</u>		
(a)	Interconnecting piping & fittings between Debris Filter to debris discharge point on the C.W. outlet pipes		Carbon Steel
(b)	Interconnecting piping and fittings between ball separator section to ball re-circulating skid André-circulating skid to injection point		SS 316
2.7	<u>DETAILS OF CLEANING BALLS FOR COMMISSIONING OF THE SYSTEM (NORMAL SPONGE BALLS & ABRASIVE BALLS)</u>		
(a)	Type		Spherical
(b)	Number of balls per charge per system		Bidder to decide

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: III-B
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 7
REV: R0	STEAM TURBINE GENERATOR AND AUXILIARIES	Page 247 of 308

<u>SR. NO.</u>	<u>ITEM</u>	<u>UNITS</u>	
(c)	No. of charges per system		To suit the system
(d)	Size		To suit the system

CONSULTANT : PROCON ENGINEERS



TITLE:

**TECHNICAL SPECIFICATION
COLTCS
1 X 660 MW BHUSAWAL TPS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01

SECTION: **I**

SUB-SECTION: **IB**

REV. NO. **00** DATE **15.05.20**

SHEET **1** OF **1**

SUB-SECTION – IB

SPECIFIC TECHNICAL REQUIREMENTS (ELECTRICAL)

STANDARD ELECTRICAL SCOPE BETWEEN BHEL AND VENDOR (FOR EPC PROJECTS)

PACKAGES: COLTS
SCOPE OF VENDOR: SUPPLY

PROJECT: 1 x 660 MW BHUSAWAL TPS

S.NO	DETAILS	SCOPE SUPPLY	SCOPE E&C	REMARKS
1	415V MCC Starter cum control panel (if applicable)	BHEL Vendor	BHEL BHEL	240 V AC (supply feeder)/415 V AC (3 PHASE 4 WIRE) supply shall be provided by BHEL based on load data provided by vendor at contract stage for all equipment supplied by vendor as part of contract. Any other voltage level (AC/DC) required will be derived by the vendor.
2	Local Push Button Station (for motors)	BHEL	BHEL	Located near the motor.
3	Power cables, control cables and screened control cables for a) both end equipment in BHEL's scope b) both end equipment in vendor's scope c) one end equipment in vendor's scope	BHEL Vendor BHEL	BHEL BHEL BHEL	1. For 3.b) & c): Sizes of cables required shall be informed by vendor at contract stage (based on inputs provided by BHEL) in the form of cable listing. Finalisation of cable sizes shall be done by BHEL. Vendor shall provide lugs & glands accordingly. 2. Cabling/ termination by BHEL.
4	Junction box for control & instrumentation cable	Vendor	BHEL	Number of Junction Boxes shall be sufficient and positioned in the field to minimize local cabling (max 10-12 mtrs) and trunk cable.
5	Any special type of cable like compensating, co-axial, prefab, MICC, fibre optical etc.	Vendor	BHEL	Refer scope/ C&I portion of specification for scope of fibre Optical cables if used between PLC/ micro processor & DCS.
6	Cable trays, accessories & cable trays supporting system	BHEL	BHEL	
7	Cable glands and lugs for equipment supplied by Vendor	Vendor	BHEL	1. Double compression Ni-Cr plated brass cable glands 2. Solder less crimping type heavy duty copper lugs for power & control cables.
8	Conduit and conduit accessories for cabling between equipment supplied by vendor	Vendor	BHEL	Conduits shall be medium duty, hot dip galvanised cold rolled mild steel rigid conduit as per IS: 9537.
9	Lighting	BHEL	BHEL	
10	Equipment grounding & lightning protection	BHEL	BHEL	

STANDARD ELECTRICAL SCOPE BETWEEN BHEL AND VENDOR (FOR EPC PROJECTS)

PACKAGES: COLTS

SCOPE OF VENDOR: SUPPLY

PROJECT: 1 x 660 MW BHUSAWAL TPS

S.NO	DETAILS	SCOPE SUPPLY	SCOPE E&C	REMARKS
11	Below grade grounding	BHEL	BHEL	
12	LT Motors with base plate and foundation hardware	Vendor	BHEL	Makes shall be subject to customer/ BHEL approval at contract stage.
13	Mandatory spares	Vendor	-	Vendor to quote as per specification.
14	Recommended O & M spares	Vendor	-	As specified elsewhere in specification
15	Any other equipment/ material/ service required for completeness of system based on system offered by the vendor (to ensure trouble free and efficient operation of the system).	Vendor	BHEL	
16	a) Input cable schedules (Control & Screened Control Cables) b) Cable interconnection details for above c) Cable block diagram	Vendor Vendor Vendor	- - -	Cable listing for Control and Instrumentation Cable in enclosed excel format shall be submitted by vendor during detailed engineering stage.
17	Equipment layout drawings	Vendor	-	For preparation of cabling layout drawings by BHEL, vendor shall furnish Electrical equipment layout drawings (both in print form as well as in AUTOCAD) of the complete plant (including electrical area) indicating location and identification of all equipment requiring cabling,
18	Electrical Equipment GA drawing	Vendor	-	For necessary interface review.

NOTES:

1. Make of all electrical equipment/ items supplied shall be reputed make & shall be subject to approval of BHEL/customer after award of contract.
2. All QPs shall be subject to approval of BHEL/customer after award of contract without any commercial implication.
3. In case the requirement of Junction Box arises on account of Power Cable size mis-match due to vendor engineering at later stage, vendor shall supply the Junction Box for suitable termination.



**TECHNICAL SPECIFICATION FOR
COLTCS & SCS
(ELECTRICAL PORTION)**

SPECIFICATION NO.
SECTION-C
REV 00 DATE 06.06.19
PAGE 1 OF 1

SPECIFIC TECHNICAL REQUIREMENTS: ELECTRICAL

1.0 EQUIPMENT & SERVICES TO BE PROVIDED BY BIDDER/ PURCHASER

- a) Services and equipment as per "Electrical Scope between BHEL and Vendor".
- b) Any item/work either supply of equipment or erection material which have not been specifically mentioned but are necessary to complete the work for trouble free and efficient operation of the plant shall be deemed to be included within the scope of this specification. The same shall be provided by the bidder without any extra charge.
- c) Supply of mandatory spares as specified in the specifications of mechanical equipments.
- d) Electrical load requirement for COLTCS & SCS.
- e) All equipment shall be suitable for the power supply fault levels and other climatic conditions mentioned in the enclosed project information.
- f) Bidder to furnish list of makes for each equipment at contract stage, which shall be subject to customer/BHEL approval without any commercial and delivery implications to BHEL.
- g) Various drawings, data sheets as per required format, Quality plans, calculations, test reports, test certificates, operation and maintenance manuals etc shall be furnished as specified at contract stage. All documents shall be subject to customer/BHEL approval without any commercial implication to BHEL.
- h) Motor shall meet minimum requirement of motor specification.
- i) Vendor to clearly indicate equipment locations and local routing lengths in their cable listing furnished to BHEL.
- j) Cable BOQ worked out based on routing of cable listing provided by the vendor for "both end equipment in vendor's scope" shall be binding to the vendor with +10 % margin to take care of slight variation in routing length & wastages.
- k) Technical requirements shall be as per specifications listed in Clause 4.1, 4.2, 4.3, 4.4 & 4.5 below.

3.0 DOCUMENTS TO BE SUBMITTED ALONG WITH BID

- 3.1 Bidder shall confirm total compliance to the electrical specification without any deviation from the technical/ quality assurance requirements stipulated. In line with this, the bidder as technical offer shall furnish two signed and stamped copies of the following:
 - a) A copy of this sheet "Electrical Equipment Specification for COLTCS & SCS" and sheet "Electrical Scope between BHEL and Vendor" with bidder's signature and company stamp.
 - b) Electrical load requirement in the load data format.
- 3.2 No technical submittal such as copies of data sheets, drawings, write-up, quality plans, type test certificates, technical literature, etc, is required during tender stage. Any such submission even if made, shall not be considered as part of offer.

4.0 LIST OF ENCLOSURES

- 4.1 Electrical scope between BHEL & vendor.
- 4.2 Technical specification for Motors DG/BSL U-6/2011/T-1
- 4.3 Data Sheet- A.
- 4.4 General technical requirement of cables and conduits & pipes.
- 4.5 Quality Plan
- 4.6 Load data format

DATA SHEET		
SL NO.	DESCRIPTION	1X660 MW BHUSAWAL TPS UNIT 6
A	General	
1	Manufacturer & country of origin	DURING DETAILED ENGINEERING
2	Motor type	Squirrel cage induction AC motors
3	Efficiency class	IE3
4	Type of starting	DOL
5	Maximum acceptable kW rating of LV motor	Upto 160KW
6	Rating up to which Single phase motors permitted.	0.2 kW
7	Installation (Indoors/ Outdoors)	Indoor/outdoor
8	Degree Of Protection	Indoor- IP55 Outdoor- IPW55
9	Name of the equipment driven by motor & Quantity	DURING DETAILED ENGINEERING
10	Maximum Power requirement of driven equipment	DURING DETAILED ENGINEERING
11	Rated speed of Driven Equipment	As per system requirement
12	Design ambient temperature (Degree Celcius)	50 deg C
B	Design and Performance Data	
1	Frame size & type designation	DURING DETAILED ENGINEERING
2	Type of duty	As per system requirement
3	Rated Voltage	240/415 V
4	Rated Frequency	50 Hz
5	System fault level at rated voltage	50 kA for 1 sec.
6	LV System grounding	solidly grounded
7	Permissible variation for	
a	Voltage	±10%
b	Frequency	+5% to -5%
c	Combined voltage & frequency	10%
8	Rated output at design ambient temp (by resistance method)	As per system requirement
9	Synchronous speed & Rated slip	As per system requirement

10	Minimum permissible starting voltage	80% of rated voltage
11	TYPE OF STARTER PROVIDED IN MCC	As per system requirement
12	Starting time in sec with mechanism coupled	
a	At rated voltage	As per system requirement
b	At min starting voltage	
13	Locked rotor current as percentage of FLC (including IS tolerance)	As per IS 12615/IEC 60034
14	Torque	
a	Starting	As per system requirement
b	Maximum	
15	Permissible temp rise at rated output over ambient temp & method	All motors shall have class F insulation but limited to class B temperature rise
16	Noise level in (dB)	The noise Level shall be as per statutory acceptance (IE/IEC)
17	Amplitude of vibration	The peak amplitude of vibration shall be within (IE/IEC) specified limit
18	Efficiency & P.F. at rated voltage & frequency	
a	At 100% load	Efficiency as per IS 12615, IEC: 60034-30 (Latest revision), P.F. as per requirement.
b	At 75% load	
c	At starting	Efficiency as per IS 12615, IEC: 60034-30 (Latest revision), P.F in line with starting requirement as per relevant standard.
C	Constructional Features	
1	Method of connection of motor driven equipment	As per system requirement
2	Applicable Standard	as per relevant standard

3	DOP of Enclosure	Indoor- IP55 Outdoor- IPW55
4	Method of cooling	The motor shall be self-ventilated type, either totally enclosed fan cooled (TEFC), or closed air circuit air- cooled (CACA).
5	Class of insulation	All motors shall have class F insulation but limited to class B temperature rise
6	Main terminal box	
a	Type	Refer Specific technical requirement for motors
b	Power Cable details (Conductor, size, armour/unarmour)	1.1 kV XLPE armour cable, size shall be provided during detailed engineering
c	Cable Gland & lugs details (Size, type & material)	Refer Specific technical requirement for motors
d	Permissible Fault level (kArms & duration in sec)	
e	Degree of Protection	
7	Earth Conductor Size & Material	Refer Specific technical requirement for motors
8	Space heater details (30KW & ABOVE) (Voltage & watts)	240 V, 1Φ , 50 Hz
9	Flame proof motor details (if applicable)	During detailed engineering
a	Enclosure	
b	suitability for hazardous area	
i	Zone O / I / II	
ii	Group IIA / IIB / IIC	
c	Degree of Protection	
9	No. of Stator winding	As per system requirement
10	Winding connection	As per system requirement
11	Kind of rotor winding	As per system requirement
12	Kind of bearings	Antifrictional Bearing, unless sleeve Bearings are required by the motor application.
13	Direction of rotation when viewed from NDE	Motor shall be bi-directional
14	Paint Shade & type	RAL 7032, for details refer Specific technical requirement for motors
15	Net weight of motor	DURING DETAILED ENGINEERING
16	Outline mounting drawing No (To be enclosed as annexure)	DURING DETAILED ENGINEERING
D	Characteristic curves/ drawings	
1	(To be enclosed for motors of rating >55KW)	DURING DETAILED ENGINEERING
2	Torque speed characteristic	
3	Thermal withstand characteristic	
4	Current vs time	
5	Speed vs time	
E	Tests on motors	As applicable (As per QAP/For Project specific requirement if any refer Specific technical requirement for motors)
F	Make	As per Annexure-I

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 365 of 440
1.0 <u>SCOPE</u> 1.1 This section covers the general requirements of the drive motors for power station auxiliary equipment. 1.2 Motors shall be furnished in accordance with both this general specification and the accompanying driven equipment specification. 1.3 In case of any discrepancy, the driven equipment specification shall govern etc. 2.0 <u>STANDARDS</u> 2.1 All motors shall conform to the latest applicable IS, IEC and CBIP Standards/ Publications except when otherwise stated herein or in the driven equipment specification. 2.2 Major standards, which shall be followed, are listed below other applicable Indian Standards for any component part even if not covered in the listed standards shall also be followed (a) IS-325 (b) IS-12615 (c) IEC-34 3.0 <u>SERVICE CONDITIONS</u> 3.1 The motors will be installed in hot, humid and tropical atmosphere, highly polluted at places with coal dust and/or fly ash canopy to be provided to all outdoor install motors. 3.2 Unless otherwise noted, electrical equipment/system design shall be based on the service conditions and auxiliary power supply given in the annexure to this specification.		

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 366 of 440
3.3	For motor installed outdoor and exposed to direct sunrays, the effect of solar heat shall be considered in the determination of the design ambient temperature	
4.0	<u>TYPE AND RATING</u>	
4.1	<u>A.C. MOTORS</u>	
4.1.1	Motors shall be general purpose, constant speed, squirrel cage, three phase, induction type.	
4.1.2	All motors shall be rated for continuous duty. They shall also be suitable for long period of inactivity.	
4.1.3	The motor name-plate rating at 50°C shall have at least 10% margin over the input power requirement of the driven HT equipment at rated duty point unless stated otherwise in driven equipment specification or in general electrical specification.	
4.1.4	The motor characteristics shall match the requirements of the driven equipment so that adequate starting, accelerating, pull up, break down and full load torques are available for the intended service.	
4.1.5	All LT motors used in this project are proposed to be energy efficient type suitable for EFF1 efficiency rating.	
4.1.6	The motor name plate rating shall have at least 10% margin over the input power requirement of the HT driven equipment and 15% for LT driven equipments at rated duty point.	
4.1.7	Motors located in hazardous area shall be flame proof type.	
4.2	<u>D.C. MOTORS</u>	
4.2.1	D.C. Motor provided for emergency service shall be shunt/compound wound type.	
4.2.2	Motor shall be sized for operation with fixed resistance starter for maximum reliability.	

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 367 of 440
4.2.3	Starter panel complete with all accessories shall be included in the scope of supply.	
4.3	For equipment installed outdoor and exposed to direct sun rays, the effect of solar heat shall be considered in determining the design ambient temperature.	
5.0	<u>PERFORMANCE</u>	
5.1	<u>RUNNING REQUIREMENTS</u>	
5.1.1	Motor shall run continuously at rated output over the entire range of voltage and frequency variations as given in the annexure.	
5.1.2	The motor shall be capable of operating satisfactorily at full load for 5 minutes without injurious heating with 75% rated voltage at motor terminals.	
5.1.3	The motor shall be designed to withstand momentary overload of 60% of full load torque for 15 second without any damage.	
5.1.4	Motor shall not be stalled if the supply voltage drops to 70% of the rated voltage for 2 seconds duration.	
5.2	<u>STARTING REQUIREMENTS</u>	
	Motor shall be designed for direct online starting at full voltage. Starting current shall not exceed 6 times full load current for all auxiliaries except boiler feed pump where the starting current shall be limited to 4.5 times. No further tolerances are applicable on starting current specified above for HT motors	
5.2.1	The motor shall be capable of withstanding the stresses imposed if started at 110% rated voltage	
5.2.2	Motor shall start with rated load and accelerate to full speed with 80% rated voltage at motor terminal except BFP motor. In case of BFP motor, it shall	

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 368 of 440
be 75% rated voltage. Minimum starting requirement for mill motor (double cage) shall be 85% rated voltage at motor terminals.		
5.2.3	Motor shall be capable of three equally spread starts per hour, two starts in quick succession from cold condition and one restart from hot condition. Cranking motor shall be capable of six equally spread starts per hour, three starts in quick succession from cold condition and one restart from hot condition. The coal conveyor and crusher motors shall be suitable for 3 consecutive hot starts with maximum 20 starts per day. Pump motor subject to reverse rotation shall be designed to withstand the stresses encountered when starting with shaft rotating at 125% rated speed in reverse direction.	
5.2.4	HT pump motors shall be suitable to start with forward rotation.	
5.2.5	The motors shall be designed to withstand 120% of rated speed for 2 minutes without any mechanical damage	
5.3	<u>STRESS DURING BUS TRANSFER.</u>	
5.3.1	The motor may be subjected to sudden application of 150% rated voltage during bus transfer, due to the phase difference between the incoming voltage and motor residual voltage.	
5.3.2	The motor shall be designed to withstand any torsional and/or high current stresses, which may result, without experiencing any deterioration in the normal life and performance characteristics.	
5.4	<u>LOCKED ROTOR WITHSTAND TIME</u>	
5.4.1	The locked rotor withstand time under hot condition at 110% rated voltage shall be more than motor starting time by at least 2.5 seconds for motors up to 20 seconds starting time and by 5 seconds for motor with more than 20 seconds starting time.	

 MAHAGENCO Maharashtra State Power Generation Co. Ltd	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 369 of 440
5.4.2	Starting time mentioned above is at minimum permissible voltage of 80% rated voltage.	
5.4.3	Hot thermal withstand curve shall have a margin of at least 10% over the full load current of the motor to permit relay setting utilizing motor rated capacity	
6.0	<u>SPECIFIC REQUIREMENTS</u>	
6.1	<u>ENCLOSURE</u>	
6.1.1	All indoor motor enclosures shall conform to the degree of protection IP-55 unless otherwise specified and outdoor motor enclosure shall confirm to degree of IPW-55. Motor for outdoor or semi-outdoor service shall be of weather-proof construction.	
6.1.2	For hazardous area approved type of increased safety enclosure shall be furnished.	
6.2	<u>COOLING</u>	
6.2.1	The motor shall be self ventilated type, either totally enclosed fan cooled (TEFC) or closed air circuit air- cooled (CACA).	
6.2.2	In case water cooling is required for very large motors, prior approval of the customer is to be obtained before proceeding ahead with design & manufacture.	
6.3	<u>WINDING AND INSULATION</u>	
6.3.1	All insulated winding shall be of copper.	
6.3.2	All motors shall have class F insulation but limited to class B temperature rise.	
6.3.3	Windings shall be impregnated to make them non-hygroscopic and oil resistant.	

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 370 of 440
6.4 <u>TROPICAL PROTECTION</u> 6.4.1 All motors shall have fungus protection involving special treatment of insulation and metal against fungus, insects and corrosion. 6.4.2 All fittings and hardwares shall be corrosion resistant. 6.5 <u>BEARINGS</u> 6.5.1 Motor shall be provided with antifriction bearings, unless sleeve bearings are required by the motor application. 6.5.2 Vertical shaft motors shall be provided with thrust and guide bearings. Thrust bearing of tilting pad type is preferred. 6.5.3 Bearings shall be provided with seals to prevent leakage of lubricant or entrance of foreign matters like dirt, water etc. into the bearing area. 6.5.4 Sleeve bearings shall be split type, ring oiled, with permanently aligned, close running shaft sleeves. 6.5.5 Grease lubricated bearings shall be prelubricated and shall have provisions for in-service positive lubrication with drains to guard against over lubrication. 6.5.6 Oiled bearing shall have an integral self cooled oil reservoir with oil ring inspection ports, oil sight glass with oil level marked for standstill and running conditions and oil fill and drain plugs. 6.5.7 Forced lubricated or water cooled bearing shall not be used without prior approval of Owner. 6.5.8 Lubricant shall not deteriorate under all service conditions. The lubricant shall be limited to normally available types with IOC equivalent. 6.5.9 Bearings shall be insulated as required to prevent shaft current and resultant bearing damage.		

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 371 of 440
6.6	<u>NOISE & VIBRATION</u>	
6.6.1	The noise level shall be as per statutory acceptance (IS/IEC).	
6.6.2	The peak amplitude of the vibration shall be within IS/IEC specified limits.	
6.7	<u>MOTOR TERMINAL BOX</u>	
6.7.1	Motor terminal box shall be phase segregated (PSTB) type and located in accordance with Indian Standards clearing the motor base- plate/ foundation.	
6.7.2	Terminal box shall be capable of being turned 360 Deg. in steps of 180 Deg. For HT motors and 90 Deg. for LT motors unless otherwise approved.	
6.7.3	The terminal box shall be split type with removable cover with access to connections and shall have the same degree of protection as motor.	
6.7.4	The terminal box shall have sufficient space inside for termination/connection of XLPE insulated armoured aluminium cables.	
6.7.5	Terminals shall be stud or lead wire type, substantially constructed and thoroughly insulated from the frame.	
6.7.6	The terminals shall be clearly identified by phase markings, with corresponding direction of rotation marked on the non-driving end of the motor.	
6.7.7	The terminal box shall be capable of withstanding maximum system fault current for duration of 0.25 sec.	
6.7.8	For 11kV and 3.3kV motor, the terminal box shall be phase-segregated type. The neutral leads shall be brought out in a separate terminal box (not necessarily phase segregated type) with shorting links for star connection.	
6.7.9	Motor terminal box shall be furnished with suitable cable lugs and double compression brass glands to match with cable used.	
6.7.10	The gland plate for single core cable shall be non-magnetic type.	

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A												
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10												
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 372 of 440												
6.7.11 Due to any reason, if the terminal box is found to be not suitable for the approved cable size for either HT/LT motors, then the bidder shall arrange necessary adopter box to facilitate the termination of cables. The adopter box shall be of the same short circuit rating and specifications as the main terminal box. The adopter box shall be located as near as possible to the main terminal box. The interconnecting cabling between adopter box and main terminal box along with providing suitable cable glands and termination kits as applicable shall also be done by the bidder. 6.8 <u>GROUNDING</u> 6.8.1 The frame of each motor shall be provided with two separate and distinct grounding pads complete with tapped hole, GS bolts and washer 6.8.2 The grounding connection shall be suitable for accommodation of ground conductors as follows : <table border="0"> <tr> <td>Motor above 90 kW</td> <td>:</td> <td>75 x 10 mm GS Flat</td> </tr> <tr> <td>Motor above 30 kW up to 90 kW</td> <td>:</td> <td>50 x 6 mm GS Flat</td> </tr> <tr> <td>Motor above 5 kW up to 30 kW</td> <td>:</td> <td>25 x 6 mm GS Flat</td> </tr> <tr> <td>Motor up to 5 kW</td> <td>:</td> <td>8 SWG GS Wire</td> </tr> </table> 6.8.3 The cable terminal box shall have a separate grounding pad 6.9 <u>RATING PLATE</u> In addition to the minimum information required by IS, the following information shall be shown on motor rating plate: (a) Temperature rise in Deg.C under rated condition and method of measurement. (b) Degree of protection.			Motor above 90 kW	:	75 x 10 mm GS Flat	Motor above 30 kW up to 90 kW	:	50 x 6 mm GS Flat	Motor above 5 kW up to 30 kW	:	25 x 6 mm GS Flat	Motor up to 5 kW	:	8 SWG GS Wire
Motor above 90 kW	:	75 x 10 mm GS Flat												
Motor above 30 kW up to 90 kW	:	50 x 6 mm GS Flat												
Motor above 5 kW up to 30 kW	:	25 x 6 mm GS Flat												
Motor up to 5 kW	:	8 SWG GS Wire												

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 373 of 440
(c) Bearing identification no. and recommended lubricant. (d) Location of insulated bearings. 6.10 <u>CONSTRUCTION</u> 6.10.1 Stator Core The Stator Core Lamination shall be made of high-grade silicon/magnetic steel sheet varnished on both sides and pressed to form rigid core. 6.10.2 Rotor The rotor construction shall be such that in case of dislodging of the rotor bar from the end ring, it should not come out and hit the stator core/stator winding and damage. 7.0 <u>ACCESSORIES</u> 7.1 <u>GENERAL</u> Accessories shall be furnished, as listed below, or if otherwise required by driven equipment specification or application 7.2 <u>SPACE HEATER</u> 7.2.1 Motor of rating 30 kW and above shall be provided with space heaters, suitably located for easy removal or replacement. 7.2.2 The space heater shall be rated 240 V, 1 phase 50 Hz and sized to maintain the motor internal temperature above dew point when the motor is idle. 7.3 <u>TEMPERATURE DETECTORS</u> 7.3.1 All 11kV and 3.3kV motors shall be provided with twelve (12) nos. Simplex type winding temperature detectors, four (4) nos. per phase.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 374 of 440
7.3.2	11kV and 3.3kV motor bearing shall be provided with duplex type temperature detectors.	
7.3.3	The temperature detector mentioned above shall be resistance type, 3 wire, platinum wound, 100 Ohms at 0°C.	
7.3.4	Leads of all simplex type motor winding RTDS and motor bearing RTDS shall be wired up to respective switchgear metering & protection compartment. From which one set of RTDS will be connected to numerical protection relay and another set shall be kept free for DCS connectivity.	
7.3.5	Five numbers of Temperature detectors / thermistors shall be provided for L.T. Motors above 90 kW (3 nos. Winding temperatures & 2 nos. bearing temperatures).	
7.4	<u>INDICATOR/SWITCH</u>	
7.4.1	Dial type local indicator with alarm contacts shall be provided for the following :	
	(a) 11kV and 3.3kV motor bearing temperature	
	(b) Hot and cold air temperature of the closed air circuit for CACA and CACW motor	
7.4.2	Flow switches shall be provided for monitoring cooling water flow of CACW motor and oil flow of forced lubrication bearing, if used.	
7.4.3	Alarm switch contact rating shall be minimum 0.5 A at 220V D.C. and 5A at 240V A.C.	
7.5	<u>CURRENT TRANSFORMER FOR DIFFERENTIAL PROTECTION</u>	
7.5.1	Motor 1000 KW and above shall be provided with three differential current transformers mounted over the neutral leads within the enclosure. Loose 3 nos. CT for mounting on switchgear side shall be in bidder's scope.	

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 375 of 440
7.5.2	The arrangement shall be such as to permit easy access for C.T. testing and replacement. Current transformer characteristics shall match Owner's requirements to be intimated later.	
7.6	<u>ACCESSORY TERMINAL BOX</u>	
7.6.1	All accessory equipment such as space heater, temperature detector, current transformers etc., shall be wired to and terminated in terminal boxes, separate from and independent of motor (power) terminal box.	
7.6.2	Accessory terminal box shall be complete with double compression brass glands and pressure type terminals to suit cable connections.	
7.7	<u>DRAIN PLUG</u>	
	Motor shall have drain plugs so located that they will drain the water, resulting from the condensation or other causes from all pockets of the motor casing.	
7.8	<u>LIFTING PROVISIONS</u>	
	Motor weighing 25 Kg. or more shall be provided with eyebolt or other adequate provision of lifting.	
7.9	<u>DOWEL PINS</u>	
	The motor shall be designed to permit easy access for drilling holes through motor feet or mounting flange for installation of dowel pins after assembling the motor and driven equipment.	
7.10	<u>PAINTING</u>	
	Motor including fan shall be painted with corrosion proof paints of colour shade (RAL-7032).	
8.0	<u>TESTS</u>	
8.1	<u>ROUTINE AND TYPE TEST:</u>	

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A						
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10						
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 376 of 440						
Tests are to be conducted for HT and LT motors 60kW and above in presence of Mahagenco representative and contractor as per IS: 325 and required copies of test certificates are to be furnished for approval and despatch clearance. In addition, following tests shall have to be carried out on the motors in presence of MAHAGENCO representative & contractor on LT & HT motors. For Motors below 60kW type and routine test conducted as per IS325 shall be witnessed by contractor and test certificate shall be submitted for review of Mahagenco & Dispatch clearance								
8.1.1 <u>FOR HT MOTORS:</u> (a) Impulse test by 1.2 / 50 micro sec. On sample coil of Stator winding insulation as type test as per IEC-671/IS 14422,1995 test voltages as under <table><tr><td>Voltage rating of motor</td><td>Impulse Test Voltage</td></tr><tr><td>3.3 kV</td><td>: 18 kV peak</td></tr><tr><td>11 kV</td><td>: 49 kV peak</td></tr></table> (b) Tan delta, charging current and dielectric loss measurements on each phase of motor stator winding as routine test (c) Polarization Index Test as per IS:7816 as routine test (d) Tan delta measurement on coils (e) Surge withstand test for inter turn insulation. (f) Test to diagnose rotor bar failure during manufacture. Tests indicated at (d), (e), (f) shall be carried out during manufacture of the coils and shall be furnished for verification .			Voltage rating of motor	Impulse Test Voltage	3.3 kV	: 18 kV peak	11 kV	: 49 kV peak
Voltage rating of motor	Impulse Test Voltage							
3.3 kV	: 18 kV peak							
11 kV	: 49 kV peak							
8.1.2 <u>FOR HT & LT MOTORS:</u> (a) Test for suitability of IP55/ IPW– 55 as per IS 4691 as type test. Type test certificate for first numeral shall be acceptable in lieu to test,								

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 377 of 440
provided the test motor is identical to motor being supplied. Second numeral test shall be carried out on one motor of each type and rating. (b) Fault Withstand Test for main terminal box as type test. Type test certificate shall be acceptable, if the test is conducted on exactly identical terminal box within last three years. (c) Test for noise level as routine test. (d) Test for vibration as routine test. (e) Overspeed test as type test. 8.2 <u>TEST WITNESS:</u> Test shall be performed in presence of Owner/Purchaser's representative so desired by the Owner/Purchaser. The Contractor shall give at least fifteen (15) days advance notice of the date when the tests are to be carried out.		

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 378 of 440

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.		MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: IV-A
		BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1		Section – 10
REV: R0		ELECTRICAL EQUIPMENT & ACCESSORIES		Page 379 of 440

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1		Section – 10
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES		Page 380 of 440
SR. NO.	ITEM	UNIT	
2.1	<u>A.C. SUPPLY:</u>		
	Voltage		± 10%
	Frequency		± 5%
	Combined Voltage & frequency		± 10% (absolute sum)
	During starting of large motor, the voltage may drop to 80% of the rated voltage for a period of 60 seconds. All electrical equipment while running shall successfully ride over such period without affecting system performance		
2.2	<u>D.C. SUPPLY</u>		
	Voltage		198 to 240 Volt

CONSULTANT : PROCON ENGINEERS

	Design Calculations For LT Cable Selection & Sizing	
	1 x 660MW BHUSAWAL T.P.S UNIT-6	

CONSTRUCTIONAL DETAILS OF CABLES SELECTED

(A) LT POWER & CONTROL CABLES

S.NO.	PARTICULARS	DETAILS	
		LT POWER CABLES	LT CONTROL CABLES
1	REFERENCE STANDARD	IS: 7098 -PART -1	IS -1554 PART -1
2	SYSTEM	415 V AC , 240 V AC & 220V DC	220V DC & 110 V AC
3	VOLTAGE GRADE	1.1 KV	1.1 KV
4	CONDUCTOR		
4.1	MATERIAL	STRANDED COMPACTED PLAIN ALUMINIUM CONDUCTOR OF H2 GRADE CLASS 2 / STRANDED HIGH CONDUCTIVITY ANNEALED PLAIN COPPER.	STRANDED,NON COMPACTED, HIGH CONDUCTIVITY ANNEALED PLAIN COPPER
4.2	REFERENCE STANDARD	IS 8130	IS 8130
4.3	SHAPE	CIRCULAR/ SHAPED	CIRCULAR
4.4	MINIMUM SIZE	ALUMINIUM- 16 SQ.MM. COPPER- 2.5 SQ. MM.	2.5 SQ.MM.
4.5	MAXIMUM CONDUCTOR TEMPERATURE WHEN CARRYING CONTINUOUSLY CURRENT	90°C	70°C
4.6	MAXIMUM CONDUCTOR TEMPERATURE AT THE TERMINATION OF SHORT CIRCUIT CURRENT	250°C	160°C
5	NO. OF CORES	1C,2C,3C,3.5C,4C	AS PER CLAUSE 4.2.1
6	INSULATION	EXTRUDED XLPE	EXTRUDED HRPVC, TYPE-C
6.1	REFERENCE STANDARD	IS: 7098 -PART -1	IS -5831 & IS-1554 PART-I
7	CORE IDENTIFICATION	BY COLOR CODING AS PER IS: 7098 - PART -1	i) CONTROL CABLES UPTO 5 CORE- COLOR CODING AS PER IS 1554 (Part-1) (ii) CONTROL CABLES ABOVE 5 CORES- BY NUMBERING AS PER IS 1554 (Part-1). INSULATION TO HAVE BLACK COLOR.
8	INNER SHEATH	EXTRUDED HRPVC FRLS TYPE -ST2 FOR MULTI CORE CABLES. SINGLE CORE SHALL HAVE NO INNER SHEATH.	EXTRUDED HRPVC TYPE -ST2 FRLS FOR MULTI CORE CABLES. SINGLE CORE SHALL HAVE NO INNER SHEATH.
8.1	REFERENCE STANDARD	IS: 5831 & IS-7098 PART-I	IS: 5831 & IS-1554 PART I
9	ARMOUR	NON-MAGNETIC HARD DRAWN ALUMINIUM ROUND WIRE ARMOUR OF H4 GRADE FOR SINGLE CORE CABLES AND GS ROUND STEEL WIRE ARMOUR FOR MULTI- CORE CABLES	GS ROUND STEEL WIRE ARMOUR FOR TWIN & MULTICORE CABLES
9.1	REFERENCE STANDARD	IS:3975 & IS 7098 PART I	IS 3975 & IS-1554 PART I
10	OUTER SHEATH	EXTRUDED FRLSH HRPVC TYPE ST2	EXTRUDED FRLSH HRPVC TYPE ST2
10.1	REFERENCE STANDARD	IS: 5831 & IS-7098 PART-I	IS: 5831
11	MARKING	(i) CABLE SIZE (CROSS SECTION AREA AND NO. OF CORES, VOLTAGE GRADE, WORD 'FRLS', REF. IS, TYPE OF CABLE, TYPE OF INSULATION/ SHEATH, MANUFACTURER'S NAME AND/OR TRADE NAME, YEAR OF MANUFACTURE-AT EVERY 5M (BY EMBOSSING), 'BHEL-PEM' and 'CUSTOMER' Name @5m (by embossing), (ii) PROGRESSIVE SEQUENTIAL MARKING OF LENGTH OF CABLE IN METERS- AT EVERY 1M (BY EMBOSSING/PRINTING)	
12	CABLE DRUMS		
12.1	TYPE OF DRUM	WOODEN (HEAVY CONSTRUCTION) AS PER IS 10418	
12.2	STANDARD DRUM LENGTH	500M FOR LARGER SIZES / 1000M FOR SMALLER SIZES (±) 5% (AS SPECIFIED IN BOQ)	
12.3	PAINTING	ENTIRE SURFACE TO BE PAINTED. ALL FERROUS PARTS USED SHALL BE TREATED WITH SUITABLE RUST PREVENTIVE FINISH OR COATING TO AVOID RUSTING DURING TRANSIT OR STORAGE. WOODEN CABLE DRUMS SHALL BE TREATED BY IMMERSING IN COPPER-NITRATE SOLUTION. DRUM NUMBER SHALL BE INDICATED ON EACH DRUM.	
12.4	OUTERMOST LAYER	TO BE COVERED WITH WATERPROOF POLYETHYLENE	
12.5	CONSTRUCTION	ALL WOODEN PARTS FROM SEASONED WOOD AND FERROUS PARTS SHALL BE TREATED WITH SUITABLE RUST PREVENTIVE FINISH OR COATING. WOODEN DRUM SHALL BE TREATED BY IMMERSING IN COPPER NITRATE SOLUTION.	

	Design Calculations For LT Cable Selection & Sizing	
	1 x 660MW BHUSAWAL T.P.S UNIT-6	

12.6	PARTICULAR INFORMATION ON DRUM	BOTH THE END OF CABLES SHALL BE PROPERLY SEALED WITH HEAT SHRINKABLE SEAL. THE CABLE DRUMS SHALL CARRY THE FOLLOWING DETAILS IN PRINTED FORM: A) MSPGCL B) MANUFACTURER'S NAME OR TRADE MAKE C) TYPE OF CABLE & VOLTAGE GRADE D) YEAR OF MANUFACTURE E) TYPE OF INSULATION E.G. XLPE/HRPVC/IE2 F) NO. OF CORE AND SIZES OF CABLES G) CABLE CODE E.G. FRLS/FS H) SINGLE LENGTH OF CABLE ON DRUM I) DIRECTION OF ROTATION, BY ARROW J) APPROX GROSS MASS
------	--------------------------------	---

(B) SCREENED CONTROL CABLES

S.NO.	PARTICULARS	DETAILS
1	VOLTAGE GRADE	1100V
2	TYPE OF CABLES	TYPE F (INDIVIDUAL & OVERALL SCREENED) & TYPE G (OVERALL SCREENED)
3	CODES AND STANDARD	IS-1554 PART-1, IS-5831, IS-8130, IS-694, SEN-4241475, IEC-60332 (I).
3(i)	CONDUCTOR	
(a)	CROSS SECTION AREA	0.5 sq.mm
(b)	CONDUCTOR MATERIAL	STRANDED, TINNED ANNEALED HIGH CONDUCTIVITY COPPER
(c)	CONDUCTOR GRADE	ELECTROLYTIC
(d)	NO. & DIA OF STRANDS	7 X 0.3 mm
(e)	NO. OF PAIRS	0.5 sq.mm. - 2P, 4P, 8P, 12P, 24P
(f)	REFERENCE STANDARD	IS-8130
(ii)	INSULATION	
(a)	MATERIAL	EXTRUDED HR PVC TYPE-C AS PER IS-5831
(b)	THICKNESS IN mm	0.6 (NOMINAL) AS PER IS-694
(c)	VOLUME RESISTIVITY (MIN) IN ohm-cm	i. 1 x 10 ¹³ Ohm-cm at 27 deg.C / room temp. (Min). ii. 1 x 10 ¹⁰ Ohm-cm at 85 deg.C (Min.)
(d)	VOLTAGE RATING	1100V
(e)	REFERENCE STANDARD	IS-1554 PART-1 & IS-5831
(f)	OD OF COND. INCLUDING INSULATION	AS PER MANUFACTURER'S CALCULATIONS / STD. PRACTICE
(iii)	PAIRING & TWISTING	
(a)	MAX. LAY OF PAIRS (mm)	60
(b)	CONDUCTOR /PAIR IDENTIFICATION	AS PER ATTACHED ANNEXURE D
4	SHIELDING	
(a)	TYPE OF SHIELDING	AL-MYLAR TAPE
(b)	INDIVIDUAL PAIR SHIELDING	TO BE PROVIDED FOR TYPE-F CABLE ONLY
(c)	OVERALL SHIELDING	TO BE PROVIDED FOR BOTH TYPE-F & TYPE-G CABLES
(d)	MINIMUM THICKNESS OF INDIVIDUAL PAIR SHIELDING	28 MICRONS
(e)	MINIMUM THICKNESS OF OVERALL CABLE ASSEMBLY SHIELDING	60 MICRONS
(f)	SHIELDING COVERAGE	100% WITH AT LEAST 25% OVERLAP
5	DRAIN WIRE (To be provided separately for individual pair shield and overall shield.)	
	Material	Multi stranded Annealed tinned copper drain wire.
	Size (No. of strands/ Dia. of each strand)	0.5 sq. mm. (7/0.3 mm.)
6	FILLERS (if applicable)	
(a)	TYPE	NON -HYGROSCOPIC WITH FRLS PROPERTY (AS REQUIRED FOR MAINTAINING CABLE CIRCULARITY)
7	INNER SHEATH	
(a)	MATERIAL	EXTRUDED HR PVC TYPE ST-2 AS PER IS-5831
(b)	THICKNESS	AS PER IS-1554 PART-1
(c)	Whether FR-LSH Applicable	YES
(d)	COLOUR	BLACK
(e)	REFERENCE STANDARD	IS-1554 PART-1 & IS-5831
8	RIP CORD	NON-METALLIC RIP CORD UNDER THE INNER SHEATH
9	ARMOUR	GALVANISED STEEL ROUND WIRE / STRIP AS PER IS-3975 & IS-1554 PART-1

	Design Calculations For LT Cable Selection & Sizing	
	1 x 660MW BHUSAWAL T.P.S UNIT-6	

10	OUTER SHEATH		
(a)	MATERIAL	EXTRUDED HR PVC TYPE ST-2 AS PER IS-5831	
(b)	THICKNESS	AS PER IS-1554 PART-1	
(c)	Whether FR-LSH Applicable	YES	
(d)	COLOUR	GREY	
(e)	REFERENCE STANDARD	IS-1554 PART-1 & IS-5831	
(f)	MARKING	(i) CABLE SIZE (CROSS SECTION AREA AND NO. OF CORES, VOLTAGE GRADE, WORD 'FRLS', REF. IS, TYPE OF CABLE, TYPE OF INSULATION/ SHEATH, MANUFACTURER'S NAME AND/OR TRADE NAME, YEAR OF MANUFACTURE-AT EVERY 5M (BY EMBOSSING), 'BHEL-PEM' and 'CUSTOMER' Name @5m (by embossing), (ii) PROGRESSIVE SEQUENTIAL MARKING OF LENGTH OF CABLE IN METERS- AT EVERY 1M (BY EMBOSSING/PRINTING)	
11	TECHNICAL PARAMETERS (C & I) AT 20 DEG C	0.5 sqmm (IS & OS) Type F	0.5 sqmm (OS) Type G
(a)	MUTUAL CAPACITANCE (MAX.) AT 0.8 KHz, nF / Km	120	100
(b)	CONDUCTOR LOOP RESISTANCE (MAX.), Ohm / Km	78	78
(c)	INSULATION RESISTANCE (MIN.), M Ohm / Km	100	100
(d)	CROSS TALK ATTENUATION (MIN.) AT 0.8KHz, dB / Km	60	60
(e)	CHARACTERISTIC IMPEDANCE (MAX.) AT 1KHz, Ohm	320	340
(f)	ATTENUATION (MAX.) AT 1KHz, dB / Km	1.2	1.2
12	FR-LSH CHARACTERISTICS		
(b)	SMOKE DENSITY RATING	Max. 60% (As per ASTM D 2843): Area under coverage.	
(c)	ACID GAS EMISSION	Max. 20% by weight (As per IEC-60754-1)	
(d)	OXYGEN INDEX	Min 29 at room temperature (As per ASTM D 2863)	
(e)	TEMPERATURE INDEX	Min. 250 deg.C at oxygen index value of 21 (As per ASTM D 2863)	
13	FLAMMABILITY TEST	(1) AS PER IEC-332-1 (2) Swedish Chimney test SEN-SS-424-1475-F3	
14	TEST VOLTAGE & DURATION (High Voltage Test)		
(a)	Core to core	1.5 kV for 1 minute	
(b)	Core to shield	1 kV for 1 minute	
15	CABLE DRUM DETAILS		
(a)	Material Type	Wooden, as per IS 10418	
(b)	Standard drum length	1000 metres: upto and including 12 Pairs. 500 metres: above 12 pairs.	
(c)	Tolerance on drum length	±5%	
(d)	Painting	ENTIRE SURFACE TO BE PAINTED. ALL FERROUS PARTS USED SHALL BE TREATED WITH SUITABLE RUST PREVENTIVE FINISH OR COATING TO AVOID RUSTING DURING TRANSIT OR STORAGE. WOODEN CABLE DRUMS SHALL BE TREATED BY IMMERSING IN COPPER-NITRATE SOLUTION. DRUM NUMBER SHALL BE INDICATED ON EACH DRUM.	
(e)	Outermost layer	TO BE COVERED WITH WATERPROOF POLYETHYLENE	
(f)	Construction	ALL WOODEN PARTS FROM SEASONED WOOD AND FERROUS PARTS SHALL BE TREATED WITH SUITABLE RUST PREVENTIVE FINISH OR COATING. WOODEN DRUM SHALL BE TREATED BY IMMERSING IN COPPER NITRATE SOLUTION.	



DOCUMENT TITLE

CONDUITS AND PIPES

SPECIFICATION NO. PES-507-27

VOLUME II B

SECTION D

REVISION 0

DATE: 27/10/2010

SHEET 1 OF 6

**GENERAL TECHNICAL REQUIREMENTS
OF
CONDUITS AND PIPES
SPECIFICATION NO. PES-507-27
REV 0**



DOCUMENT TITLE

CONDUITS AND PIPES

SPECIFICATION NO. PES-507-27

VOLUME II B

SECTION D

REVISION 0

DATE: 27/10/2010

SHEET 2 OF 6

1.0 GENERAL

- 1.1 This specification covers the manufacture, inspection & testing at vendor's works and delivery to site of conduits, pipes and their fittings for electrical installation.

2.0 CODES AND STANDARDS

- 2.1 The material, constructional features and various processes involved in manufacture shall comply with currently applicable Indian Standards.
- 2.2 The following Indian Standards shall be applicable, in general. However if Data Sheet A specifies conformance to other international standards, the equivalent IEC/BS/other standards shall be considered.

- a) IS:9537 (All Parts) Conduits for electrical installation.
- b) IS:3480 Flexible steel conduits for electrical wiring.
- c) IS:6946 Flexible non-metallic conduits for electrical installation.
- d) IS:1239 Mild steel tubes, tubulars and other wrought steel fittings.
(for size above 63mm dia of rigid conduits)
- e) IS:2667 Fittings for rigid steel conduits for electrical wiring.
- f) IS:3837 Accessories for rigid steel conduits for electrical wiring.
- g) IS:3419 Fittings for rigid non-metallic conduits.
- h) IS:6005 Code of practice for phosphating iron & steel.
- i) IS:2629 Recommended practice for hot dip galvanizing on iron and steel.
- j) IS:4759 Specification for hot dip zinc coatings on structural steel and allied products.
- k) IS:6745 Methods for determination of mass of zinc coating on zinc coated iron and steel articles.

3.0 DESIGN REQUIREMENTS AND CONSTRUCTIONAL FEATURES

The conduit and conduit accessories shall include conduit plugs & caps, gaskets and box cover etc in addition to any specific requirement given in Data Sheet A. The diameter of conduits and accessories shall be uniform throughout the length.

3.1 Rigid Conduits and Fittings

- 3.1.1 Rigid conduits shall generally conform to the requirements of IS:9537 (Part I & Part II). However conduits above 63mm diameter shall conform to the requirements of IS:1239. Unless specified otherwise in Data Sheet A, all conduits and pipes shall be of medium duty.



DOCUMENT TITLE

CONDUITS AND PIPES

SPECIFICATION NO. PES-507-27

VOLUME II B

SECTION D

REVISION 0

DATE: 27/10/2010

SHEET 3 OF 6

- 3.1.2 The rigid conduits shall be hot dip galvanized inside and outside. Weight of zinc shall be as per IS:4759. Conduits shall be thoroughly cleaned and pretreated, conforming to IS:6005.
- 3.1.3 Conduits shall be supplied in approximate length as specified below
- a) Rigid Conduits 5 metres
 - b) Flexible Conduits 10 - 30 metres
- 3.1.4 Each end of conduit length shall be threaded. The ends of conduits shall be sealed with protective caps to prevent damage to threaded portions and entrance of moisture and foreign material.
- 3.1.5 The inside surface of all conduits shall be smooth and suitable for pulling insulated cables and wires without damage.
- 3.1.6 Conduit fittings shall be made out of tube or cast to the shape as to match with corresponding conduit sizes and meet their purpose without any special adjustment.
- 3.1.7 All fittings shall be screwed type and hot dip galvanized inside and outside.
- 3.2 Flexible Metallic Conduits and Fittings
- 3.2.1 Flexible metallic conduits shall generally conform to the requirements of IS:3480.
- 3.2.2 Flexible conduits shall be made of strip steel which shall be of cold rolled mild steel. The strip shall be of uniform width and thickness throughout.
- 3.2.3 The strip shall be electro galvanized to a minimum thickness of 25 microns as specified in IS:3480. The surface of the strip shall be thoroughly cleaned before application of protective coating. Pretreatment, before galvanization, shall conform to IS:6005.
- 3.2.4 The strip for making flexible conduit shall be wound tightly and so overlapped in subsequent helicals that no openings are seen in normal position.
- 3.2.5 Flexible conduits shall be lead coated for application in high temperature zones, if specifically mentioned in Data Sheet A.
- 3.2.6 The conduit shall have uniform diameter throughout its length. The internal surface of all conduits shall be smooth and suitable for pulling insulated cables and wires without damage.
- 3.3 PVC Conduits
- 3.3.1 PVC conduits shall generally conform to the requirements of IS:9537(Part I & Part III).
- 4.0 INSPECTION
- 4.1 The following stages of manufacture shall be stage inspected by Purchaser or his duly authorized representative.
- 4.1.1 Inspection of manufacturing processes such as shearing, punching, bending, welding, galvanizing etc.
 - 4.1.2 Inspection of packing material and procedure.



DOCUMENT TITLE

CONDUITS AND PIPES

SPECIFICATION NO. PES-507-27

VOLUME II B

SECTION D

REVISION 0

DATE: 27/10/2010

SHEET 4 OF 6

4.1.3 Inspection of finished product.

4.2 The inspection will be carried out as per agreed quality plan.

5.0 **TESTING**

5.1 Rigid Conduits

- a) Acceptance Tests - as per IS:9537 Part 1 & 2 upto 63mm OD
- as per IS:1239 above 63mm OD

- i) Dimension checks
ii) Bending test (below 32mm OD)
iii) Compression test

- b) Special Tests (as acceptance test) as applicable to galvanizing.

5.2 Flexible Steel Conduits

- a) Acceptance Tests - as per IS:3480

- i) Dimension checks
ii) Linear breaking test
iii) Test for flexibility
iv) Bend fracture test
v) crushing test

- b) Special Tests (as acceptance test) as applicable to galvanizing.

5.3 PVC Conduits

- a) Type Tests - as per IS : 9537 (Part 1 & 3)

- i) Dimension checks
ii) Bending test
iii) Compression test
iv) Impact test
v) Collapse test
vi) Resistance test
vii) Resistance to burning



DOCUMENT TITLE

CONDUITS AND PIPES

SPECIFICATION NO. PES-507-27

VOLUME II B

SECTION D

REVISION 0

DATE: 27/10/2010

SHEET 5 OF 6

viii) Electrical Characteristics

b) Acceptance tests - as per IS:9537 (Part 1 & 3)

i) Dimension checks

ii) Bending test

iii) Compression test

iv) Collapse test

v) Resistance to burning

vi) Electrical characteristics

5.4 Sampling for the tests shall be done as per applicable standards mentioned above.

5.5 The testing shall be carried out as per agreed quality plan.

6.0 PACKING

6.1 The material shall be packed as per manufacturer's standard. Packing procedure shall be to the purchaser's approval.

7.0 DRAWING, DATA AND DOCUMENTS REQUIRED

7.1 The following information shall be furnished within two weeks of award of contract, for purchaser's approval.

a) Manufacturing drawings/details.

b) Recommended Field quality plan covering site handling, storing, laying etc.

c) Final quality plan.

7.3 The following information shall be furnished after testing and inspection

Type Test, routine test and special test certificates in bound volume in requisite number.



DOCUMENT TITLE

CONDUITS AND PIPES

SPECIFICATION NO. PES-507-27

VOLUME II B

SECTION D

REVISION 0

DATE: 27/10/2010

SHEET 6 OF 6

DATASHEET A

SPECIFIC TECHNICAL REQUIREMENTS

- 1.0 APPLICABLE STANDARDS: IS:9537,IS: 1239, IS:3480
- 2.0 RIGID STEEL CONDUITS & STEEL PIPES
- a) Material: Cold rolled mild steel to IS:226
 - b) Applicable standard
 - i) Upto 63mm OD: IS:9537 Part I & II
 - ii) Above 63mm OD: IS:1239
 - c) Surface treatment: Hot dip galvanizing inside & outside as per IS:2629
 - d) Wt. of zinc: as per IS 4759
 - e) Duty: Medium
 - f) Fittings: Screw type as per IS:2667
- 3.0 FLEXIBLE CONDUITS:
- a) Material: Strip steel cold rolled and annealed
 - b) Standard applicable: IS: 3480
 - c) Surface treatment: Electro galvanized as per IS: 3480
 - d) Whether lead coated: YES
 - e) Minimum thickness: 25 microns
of zinc coating
- 4.0 PVC CONDUITS
- a) Material: PVC
 - b) Applicable standard: IS: 9537 (Part I & III)

ANNEXURE-I

SUB-VENDOR LIST

The list of approved make of the LT Motors are as mentioned below:

S.No.	LIST OF LT MOTORS
1.	BHARAT BIJLEE LTD.
2.	CROMPTON GREAVES
3.	ASEA BROWN BOVERI
4.	KIRLOSKAR ELECTRIC CO LTD.
5.	NGEF
6.	SIEMENS
7.	MARATHON
8.	GE-POWER
9.	RAJINDRA ELECT INDUSTRIES
10.	LAXMI HYDRAULICS PVT. LTD

However, the final list of makes for the LT Motors is subjected to BHEL/Customer approval, during contract stage, without any commercial implications.



TITLE:

**TECHNICAL SPECIFICATION
COLTCS
1 X 660 MW BHUSAWAL TPS
SPECIFIC TECHNICAL REQUIREMENTS**

SPEC. NO.: **PE-TS-415-165-N002** . Rev 01

SECTION: **I**

SUB-SECTION: **IC**

REV. NO. **00** DATE 15.05.20

SHEET **1** OF **1**

SUB-SECTION – IC

SPECIFIC TECHNICAL REQUIREMENTS (C &I)

CONDENSER ON LOAD TUBE CLEANING SYSTEM - C&I REQUIREMENTS		
S.NO.	PROJECT	1X660MW BHUSAWAL
1.00	SYSTEM	COLTCS
2.00	COMMON / PER UNIT	REFER NOTE -9,14
3.00	CONTROL SYSTEM	DCS with Local Control Panel
3.10	PROCESSOR CONFIGURATION FOR PLC SYSTEM	NA
4.00	LOCATION OF CONTROL SYSTEM	EER
4.10	CONTROL SYSTEM SCOPE (BIDDER/ BHEL/ CUSTOMER)	DCS:-BHEL LCP:-Bidder
5.00	HARDWIRED INTERFACE WITH DCS (Y/N)	NA
5.10	PURPOSE OF HARDWIRED INTERFACE WITH DCS	CONTROL & MONITORING
5.11	a) COMMAND FROM LCP(Y/N)	Y
5.12	b) STATUS FEEDBACK TO LCP(Y/N)	Y
5.13	c) GROUP FAULT ALARM TO DCS (Y/N)	Y
6.00	SOFTLINK TO DCS (Y/N)	NA
6.10	PURPOSE OF SOFTLINK TO DCS	NA
6.11	a) COMMAND INTERFACE WITH DCS (Y/N)	NA
6.12	b) STATUS MONITORING IN DCS (Y/N)	NA
7.00	PROTECTION CLASS FOR PLC / RIO PANEL	NA
8.00	CONTROL FROM PB's ON LCP/OWS	PB's ON LCP
9.00	ANNUNCIATION ON LCP (Y/N) -- IF Y, MIN NO. OF HARDWIRED ALARMS / INDICATIONS	YES- BIDDER TO PROPOSE MIN. NO. OF ALARMS/INDICATIONS
9.10	MIMIC ON LCP (Y/N)	Y
10.00	CONTROL FROM DCS IN CCR (Y/N)	Y
11.00	TYPE OF SOFTLINK (TP/OFC)	NA
11.10	COMMUNICATION CABLE SCOPE (BIDDER/ BHEL)	NA
11.20	REDUNDANT CABLE (Y/N)	NA

CONDENSER ON LOAD TUBE CLEANING SYSTEM - C&I REQUIREMENTS		
S.NO.	PROJECT	1X660MW BHUSAWAL
11.30	PROTOCOL	NA
12.00	RIO / RPU (Y/N)	NA
13.00	## NO. OF OWS / LAPTOP/LCD	NA
13.10	SIZE OF OWS/ CRT OR LCD	NA
14.00	NO. OF PRINTER	NA
14.10	PRINTER SIZE AND TYPE	NA
15.00	POWER SUPPLY AVAILABLE FOR BALL MONITOR (24V DC / 110 V AC UPS / 230 V AC UPS)	230 V AC UPS
15.10	&& POWER SUPPLY AVAILABLE FOR PLC PANEL (3PHASE, 415 V AC/ 1PHASE, 110 V UPS/ 1PHASE, 230 V UPS)	NA
15.20	REDUNDANT FEEDERS (R) / NON-REDUNDANT (NR) FEEDERS FOR POWER SUPPLY	NA
15.30	** UPS BATTERY CONFIGURATION (1X100% / 2X100%)	NA
15.40	BATTERY TYPE (LEAD ACID/ Ni-Cd)	NA
15.50	BATTERY BACK-UP TIME (in minutes)	NA
16.00	ACTUATOR WITH INTEGRAL STARTER (Y/N)	N
17.00	PG/ DPG/ PS/ DPS/ PT/ DPT per Balls Collecting Strainer	DPT = 2 nos. DPI = 1 no.(ACROSS EACH BALL SEPARATOR)
19.00	PROJECT SPECIFIC INFO	Y
20.00	REMARKS	

CONDENSER ON LOAD TUBE CLEANING SYSTEM - C&I REQUIREMENTS

S.NO.	PROJECT	1X660MW BHUSAWAL
21.00	NOTES:	
	1. \$\$ THIS IS APPLICABLE FOR DCS CONTROLLED SYSTEMS ONLY.	
	2. && THIS IS APPLICABLE FOR PLC CONTROLLED SYSTEMS. ALL POWER SUPPLY REQUIREMENTS FOR INDIVIDUAL SUB-SYSTEMS/ COMPONENTS EG. BALL MONITOR, SOL VALVES ETC SHALL BE DERIVED BY THE VENDOR FROM THIS POWER SUPPLY.	
	3. ** THE UPS FOR PLC & OWS SHALL BE IN BIDDER'S SCOPE. ITS CONFIGURATION SHALL BE 2X100% CHARGERS / INVERTERS.	
	4. IN CASE OF DCS CONTROLLED SYSTEMS, BIDDER TO TERMINATE ALL INSTRUMENTATION AND CONTROL ELEMENTS IN JUNCTION BOXES FOR FURTHER CABLING TO DCS BY BHEL/CUSTOMER. BIDDER TO PROVIDE INPUT/OUTPUT LIST, DRIVES LIST, JUNCTION BOX SCHEDULE AND TERMINATION DETAILS, RECOMMENDED CONTROL LOGICS / WRITE-UP ETC. DURING DETAILED ENGINEERING	
	5. IN CASE OF PLC CONTROLLED SYSTEMS, ALL CABLES & CABLE ENGINEERING SHALL BE IN BIDDER'S SCOPE.	
	6. ## FOR PLC BASED CONTROL SYSTEM WHERE OWS IS PROVIDED, THE OWS SHALL HAVE PROGRAMMING & CONFIGURATION FACILITY. LAPTOPS SHALL BE OF LATEST CONFIGURATION WITH PROGRAMMING SOFTWARE & COMMUNICATION CABLE.	
	7. FOR THE PROJECTS IN WHICH CONTROL ARE ENVISAGED WITH DCS CONTROL SYSTEM FOR COLTCS/SCS/DEBRIS FILTER - 2 SETS OF COLTCS/SCS/DEBRIS FILTER SHALL HAVE ONE COMMON STARTER PANEL (SWITCH GEAR PANEL).	
	8. FOR THE PROJECTS IN WHICH CONTROL ARE ENVISAGED WITH PLC BASED CONTROL SYSTEM FOR COLTCS/SCS - 2 SETS OF COLTCS/SCS SHALL HAVE ONE COMMON STARTER PANEL (SWITCH GEAR PANEL) CUM PLC PANEL.	
	9. FOR THE PROJECTS IN WHICH CONTROLS ARE ENVISAGED WITH PLC BASED CONTROL SYSTEM, 2 SETS OF COLTCS SHALL HAVE ONE COMMON PLC CONTROL SYSTEM WITH SEPARATE LCP PROVIDED FOR EACH SET OF COLTCS.	
	10. COLOUR OF STARTER PANEL SHALL BE RAL 7035 FOR EXTERIOR & BRILLIANT WHITE FOR INTERNAL. THIS SHALL BE DECIDED DURING DETAIL ENGINEERING	
	11. INSTRUMENT RACK AND JUNCTION BOXES SHALL BE IN BIDDER'S SCOPE OF SUPPLY. FURNITURE FOR PLACING OWS & PRINTER SHALL BE IN BIDDER'S SCOPE.	
	12. BIDDER TO FURNISH ELECTRICAL LOAD DATA DURING DETAILED ENGINEERING.	
	13. ALARM FACIA SHALL BE UNDER BIDDER'S SCOPE. NO. OF FACIA SHALL BE DECIDED DURING DETAILED ENGINEERING.	
	14. FOR PROJECTS WHERE PLC BASED CONTROL SYSTEM IS ENVISAGED FOR COLTCS & SCS, SEPARATE PLC'S SHALL BE PROVIDED FOR COLTCS & SCS. PLC SYSTEM SHALL BE PROVIDED UNIT WISE.	
	LEGEND:	
	DCS- DISTRIBUTED CONTROL SYSTEM	
	PLC- PROGRAMMABLE LOGIC CONTROLLER	
	RPU - REMOTE PROCESSING UNIT	

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
CONTROL AND INSTRUMENTATION SPECIFICATION FOR COLTCS		

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I

TABLE OF CONTENTS

- A. General & Specific Technical requirement
- B. C&I deliverables list
- C. Specification for Motorized valve actuator
- D. Specification for field instruments
- E. Control panels specification
- F. Applicable codes and standards

- H. Mandatory spares
- I. Drawings

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
GENERAL & SPECIFIC TECHNICAL REQUIREMENT		

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I

GENERAL REQUIREMENT

1.0 Bidder shall provide complete and independent control & instrumentation system with all accessories, auxiliaries and associated equipments for the safe, efficient and reliable operation of auxiliary systems.

2.0. The quantity of instruments for auxiliary system shall be as per tender P & ID, wherever provided, for the respective system as a minimum for bidding purpose. However, Bidder shall also include in his proposal all the instruments and devices that are needed for the completeness of the plant auxiliary system/ equipment supplied by the bidder, even if the same is not specifically appearing in the P & ID. During detail engineering if any additional instruments are required for safe & reliable operation of plant, bidder shall supply the same without any price implication.

3.0 Measuring instruments/equipment and subsystems offered by the bidder shall be from reputed experienced manufacturers of specified type and range of equipment, whose guaranteed and trouble free operation has been proven. Further all the instruments shall be of proven reliability, accuracy, and acceptable international standards and shall be subject to employer's approval. All instrumentation equipment and accessories under this specification shall be furnished as per technical specification, ranges, makes/ numbers as approved by the employer' during detail engineering.

4.0 The necessary root valves, impulse piping, drain cocks, gauge-zeroing cocks, valve manifold and all the other accessories required for mounting/ erection of these local instruments shall be furnished, even if not specifically asked for, on as required basis. The contacts of equipment mounted instruments; sensors, switches etc. for external connection including spare contacts shall be wired out to suitably located junction boxes.

5.0 In case of any contradiction most stringent clause/condition shall prevail.

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I

Specific Technical Requirements (C&I):

1) The control of COLTCS shall be DCS based. The operation and control philosophy of COLTCS shall be as per design memorandum given elsewhere in the specification. Bidder to provide Local Control Panel for COLTCS. The motorized valves, ball separator, ball recirculation pump etc. shall be operated from Lamp /Pushbuttons, selector switches etc. located on the Local Control panel.

2) All electrical actuators shall be integral type.

3) The make/model of various instruments/items/systems shall be subject to approval of owner/purchaser during detailed engineering stage. No commercial implication in this regard shall be acceptable. In case of any conflict and repetition of clauses in the specification, the more stringent requirements among them are to be complied with.

4) Power supply shall be provided by BHEL at a single point. Further distribution to various instruments shall be in Bidder's scope. Bidder to include necessary power distribution board (ACDB)(as per details attached elsewhere in this specification) in his scope. Any power supply other than the above, if required by any instrument/device, has to be derived by the Bidder from the above supply and all necessary hardware for the same shall be in bidder's scope. Bidder to furnish UPS power requirement along with the bid.

5) The solenoid valves shall have limit switches for open/close feedback.

6) All the instruments/drives shall be terminated on JB's/Panels in field. JB's/Panels shall be in Bidder's scope. RTD's shall be of duplex type.

7) Scope of Instrumentation cables (Screened Control Cables), Fibre Optic cable & Control cables shall be as per Electrical Cable scope matrix in Electrical portion of specification. Any cable in Bidder's scope shall be as per specification.

8) At least 10% spare channels and window facia shall be provided in each annunciator group in the local control panel.

9) Bidder to comply with codes and standards as mentioned in the specification.

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
10) All local gauges, transmitters and switches shall be mounted on suitable enclosures, racks subject to owner's approval. All transmitters shall be HART compatible. 11) Bidder to delegate /depute their persons/experts as per owner/consultants' requirement. 12) Bidder must offer general tools and tackles and special calibration instruments required during start-up, trial run, operation and maintenance of the system. 13) The above given scope is indicative & minimum. Any item/ equipment not indicated above however required for the completeness of the system is to be supplied by bidder without any technical, commercial and delivery implication to BHEL.		

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
C&I DELIVERABLES LIST		

LIST OF DELIVERABLES OF PEM - C&I DEPARTMENT						
1X660 MW BHUSAWAL TPP						
Sl.No.	DRAWING NO.	DRAWING/DOCUMENT TITLE	CUSTOMER	FROM	USER	REMARKS
INSTRUMENTATION						
1	PE-V9-415-XXX-I901	INSTRUMENT DATA SHEETS	-	VENDOR	C&I	
2	PE-V9-415-XXX-I902	INSTRUMENT SCHEDULE	-	VENDOR	C&I	
3	PE-V9-415-XXX-I903	INSTRUMENT INSTALLATION/ HOOK UP DIAGRAMS	-	VENDOR	C&I	
5	PE-V9-415-XXX-I905	INSTRUMENT QP/CHECK LIST	-	VENDOR	C&I	
LOCAL CONTROL PANEL						
1	PE-V9-415-XXX-I950	LOCAL CONTROL PANEL DATASHEET	A	VENDOR	C&I	
2	PE-V9-415-XXX-I951	WIRING DIAGRAM	-	VENDOR	C&I	
3	PE-V9-415-XXX-I952	PANEL GA DRAWINGS	-	VENDOR	C&I	
8	PE-V9-415-XXX-I956	BILL OF MATERIAL	-	VENDOR	C&I	
13	PE-V9-415-XXX-I957	LOCAL CONTROL PANEL QUALITY PLAN	`	VENDOR	C&I	
14	PE-V9-415-XXX-I958	LOCAL CONTROL PANEL O&M MANUAL	-	VENDOR	C&I	
19	PE-V9-415-XXX-I925	MANDATORY SPARES BILL OF MATERIAL	A	VENDOR	C&I	
	Notes:	415 - Project No.				
		XXX -MAX Package Code				
		\$\$ -Approval by BHEL if Vendor BBU Item. Approval by Customer if Customer BBU Item				

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
SPECIFICATION FOR MOTORISED VALVE ACTUATOR		

 MAHAGENCO MAHARASHTRA STATE POWER GENERATION CO. LTD.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 11
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 385 of 440
1.0 <u>SCOPE</u> 1.1 This Section covers the general requirements of Electric Motor Actuators for valves, dampers and gates. 1.2 All electric motor actuators shall be furnished in accordance with this general specification and the accompanying driven equipment specification. 2.0 <u>STANDARDS</u> 2.1 All electrical equipment shall conform to the latest applicable IS, ANSI and NEMA Standards, except when stated otherwise herein or in driven equipment specification. 2.2 Major standards, which shall be followed, are listed below. Other applicable Indian Standards for any component part even if not covered in the listed standards shall also be followed: (a) IS-9334 (b) IS-325 3.0 <u>SERVICE CONDITIONS</u> 3.1 The actuator shall be suitable for operation in hot, humid and tropical atmosphere, highly polluted at places with coal dust and/or fly ash. 3.2 Unless otherwise noted, electrical equipment/system design shall be based on the service conditions and auxiliary power supply given in the general specification. 4.0 <u>RATING</u> 4.1 For isolating service, the actuator shall be rated for three successive open-close operation of the valve/damper or 15 minutes, whichever is longer. 4.2 For regulating service, the actuator shall be suitably time-rated for the duty cycle involved with necessary number of starts per hour, but in no case less than 150 starts per hour.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 11
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 386 of 440
5.0	<u>PERFORMANCE</u> The actuator shall meet the following performance requirements: 5.1 Open and close the valve completely and make leak-tight valve closure without jamming. 5.2 Attain full speed operation before valve load is encountered and impart an unseating blow to start the valve in motion (hammer blow effect). 5.3 Operate the valve stem at standard stem speed and shall function against design differential pressure across the valve seat. 5.4 The motor reduction gearing shall be sufficient to lock the shaft when the motor is de-energised and prevent drift from torque switch spring pressure. 5.5 The entire mechanism shall withstand shock resulting from closing with improper setting of limit switches or from lodging of foreign matter under the valve seat. 6.0 <u>SPECIFIC REQUIREMENT</u> 6.1 <u>CONSTRUCTION</u> 6.1.1 The actuator shall essentially comprise the drive motor, torque/ limit switches, gear train, clutch, hand wheel, position indicator/ transmitter, in-built thermostat for over load protection, space heater and internal wiring. Actuator shall be integral type. Integral starter shall have facility to hook-up with Plant DCS for positioning of limit and torque switches. 6.1.2 The actuator enclosure shall be totally enclosed, dust tight, weather-proof suitable for outdoor use without necessity of any canopy. 6.1.3 All electrical equipment, accessories and wiring shall be provided with tropical finish to prevent fungus growth. 6.1.4 The actuator shall be designed for mounting in any position without any lubricant leakage or operating difficulty.	

 MAHAGENCO MAHARASHTRA STATE Power Generation Co. Ltd	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 11
	REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES

6.2

MOTOR

6.2.1

The drive motor shall be three phase, squirrel cage, induction machine with minimum class B insulation and IPW-55 enclosure, designed for high torque and reversing service.

6.2.2

The motor shall be designed for full voltage direct on-line start, with starting current limited to 6 times full-load current.

6.2.3

The motor shall be capable of starting at 85 percent of rated voltage and running at 80 percent of rated voltage at rated torque and 85 percent rated voltage at 33 percent excess rated torque for a period of 5 minutes each.

6.2.4

Earthing terminals shall be provided on either side of the motor.

6.3

LIMIT SWITCHES

Each actuator shall be provided with following limit switches:

6.3.1

Two (2) torque limit switches, one for each direction of travel, self-locking, adjustable torque type.

6.3.2

Four (4) end-of-travel limit switches, two for each direction of travel.

6.3.3

Two (2) position limit switches, one for each direction of travel, each adjustable at any position from fully open to fully closed positions of the valve/damper.

6.3.4

Each limit switch shall have 2 NO + 2 NC potential free contacts. Contact rating shall be 5A at 240V A.C. or 0.5A at 220V D.C.

6.4


HAND WHEEL

Each actuator shall be provided with a hand wheel for emergency manual operation. The hand wheel shall declutch automatically when the motor is energized.

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: IV-A
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1	Section – 12
REV: R0	ELECTRICAL EQUIPMENT & ACCESSORIES	Page 388 of 440
6.5 <u>POSITION INDICATOR/TRANSMITTER</u> The actuator shall have: 6.5.1 One (1) built-in local position indicator for 0-100% travel 6.5.2 One (1) position transmitter, potentiometer type, for remote indicator. 6.6 <u>SPACE HEATER</u> A space heater shall be included in the limit switch compartment suitable for 240V, 1 phase, 50 Hz supply. 6.7 <u>WIRING</u> All electrical devices shall be wired up to and terminated in a terminal box. The internal wiring shall be of sufficient size for the power rating involved but in no case less than 1.5 Sq.mm copper. All wiring shall be identified at both ends with ferrules. 6.8 <u>TERMINAL BOX</u> The terminal box shall be weather proof, with removable front cover and cable glands for cable connection. The terminal shall be suitable for connection of 2.5 Sq.mm copper conductor. 7.0 <u>TEST</u> 7.1 The actuator and all components thereof shall be subject to tests as per relevant Standards. In addition, if any special test is called for in equipment specification, the same shall be performed. 7.2 <u>TEST WITNESS:</u> Test shall be performed in presence of Owner/Purchaser's representative so desired by the Owner/Purchaser. The Contractor shall give at least fifteen (15) days advance notice of the date when the tests are to be carried out.		

3-V-MISC-24227

DRAWING NO.

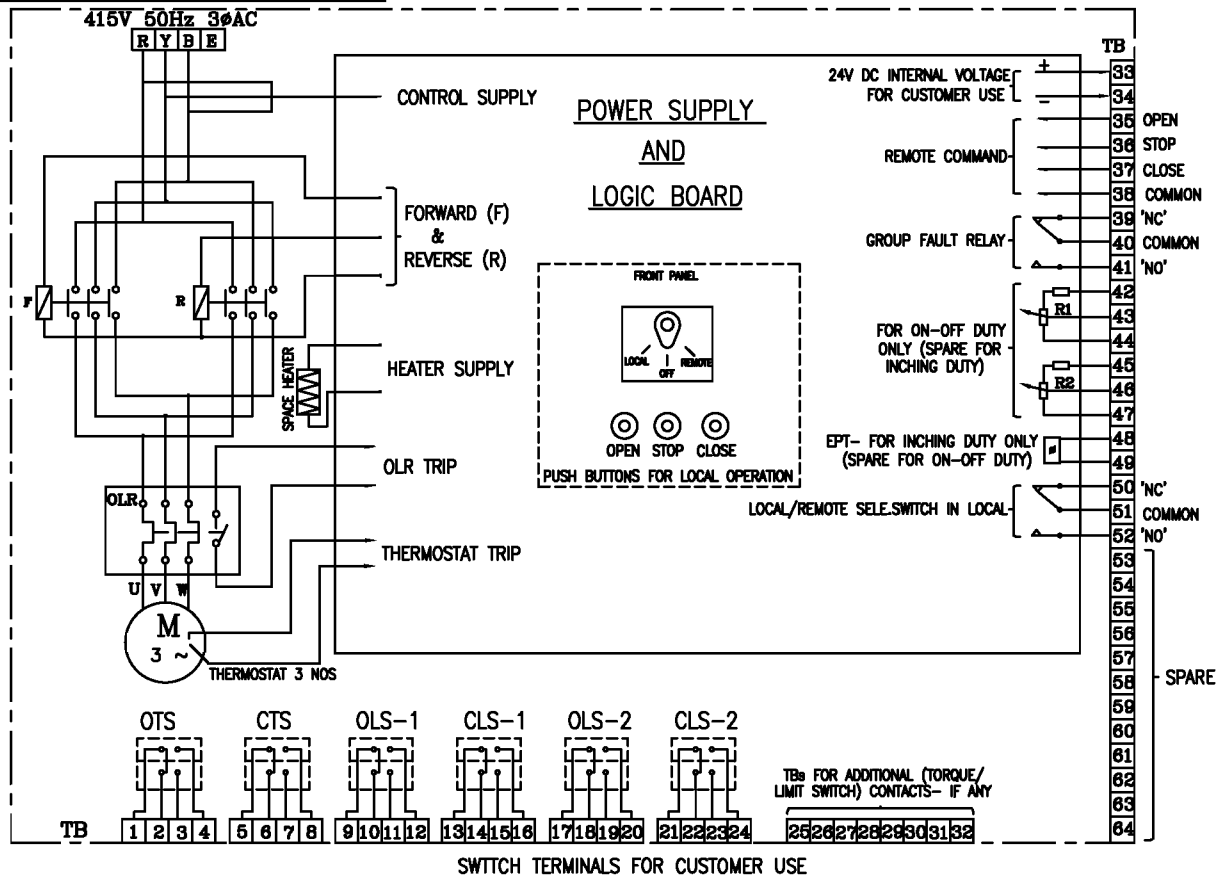

CONTACT DEVELOPMENT DIAGRAM

OTS	1-2	OPEN AT OVER TORQUE DURING OPENING TRAVEL				
	3-4	CLOSE AT OVER TORQUE DURING OPENING TRAVEL				
CTS	5-8	OPEN AT OVER TORQUE DURING CLOSING TRAVEL				
	7-8	CLOSE AT OVER TORQUE DURING CLOSING TRAVEL				
OLS-1	9-10					
	11-12					
CLS-1	13-14					
	15-16					
OLS-2	17-18					
	19-20					
CLS-2	21-22					
	23-24					
SWITCH	TERMINAL NO.	FULL OPEN	a	INTERMEDIATE	b	FULL CLOSE
		VALVE POSITION				
		INDICATES CONTACT CLOSED				
		INDICATES CONTACT OPEN				
CONTACT RATING: 5A AT 250V AC & 0.5A AT 220V DC						

SETTING PROCEDURE OF POSITION LIMIT AND TORQUE SWITCH

VALVES	OPEN		CLOSE	
	MAIN	BACK UP	MAIN	BACK UP
GATE VALVE OF 100 mm AND ABOVE IN 1500 CL AND ABOVE RATINGS	OLS	OTS *	CLS	CTS
ALL OTHER GATE & GLOBE VALVES	OLS	OTS *	CTS	#
# - CLS NOT TO BE CONNECTED IN TRIP CIRCUIT				
* - BYPASS OTS FOR INITIAL 5% OF TRAVEL (FOR GATE VALVES ONLY)				

NOTE:-

- ALL TORQUE AND LIMIT SWITCHES (OTS, CTS, OLS1&2, CLS1&2) ARE WITH 2NO+2NC CONTACTS '1NO+1NC' IS TERMINATED IN TBS 1-24, REMAINING CONTACTS ARE FOR INTERNAL USE.
ANY SPARE CONTACTS WHICH ARE NOT USED INTERNALLY ARE TO BE TERMINATED IN TBS 25-32
- CTS - TORQUE SWITCHES FOR CW ROTATION (CLOSE)
- OTS - TORQUE SWITCHES FOR CCW ROTATION (OPEN)
- OLS-1, OLS-2 - LIMITSWITCHES FOR POSITION OPEN
- CLS-1, CLS-2 - LIMITSWITCHES FOR POSITION CLOSE
- EPT - ELECTRONIC POSITION TRANSMITTER (POTENTIOMETRIC TYPE, FOR INCHING DUTY)
- R1-R2-POTENTIOMETER 2 x 100 OHMS (FOR ON-OFF DUTY)
- FOR COMMANDS & EPT EITHER INTERNALLY GENERATED 24 VDC OR EXTERNAL SUPPLY OF 24VDC CAN BE USED
- M - MOTOR 3Φ 415V 50 Hz AC SUPPLY

REV	DATE	ALTERED
		CHD & APPD

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.

TYPE OF PRODUCT ELECTRICAL VALVE ACTUATORS (AC) WITH INTEGRAL STARTERS
OR NAME OF CUSTOMER/PROJECT (DRAWN FOR INTERMEDIATE POSITION OF VALVES)

 365-121		BHARAT HEAVY ELECTRICALS LTD., UNIT: HIGH PRESSURE BOILER PLANT. TIRUCHIRAPALLI-620014.		DRN	NAME N.P.ESWAR	SIGN N.P	DATE 07.10.04	NO. OF VAR.	
DEPT VL			SCALE	WEIGHT (KG).	CHD	D.DINAKARAN	D.D	07.10.04	
CODE					APPD	K.ARUNACHALAM	K.A	07.10.04	
TITLE WIRING DIAGRAM (TERMINAL PLAN) FOR ACTUATOR WITH INTEGRAL STARTER					CARD CODE U 01	REFERENCE INFORMATION DRAWING NO. 3-V-MISC-24227			NO. OF TIMES REV 0

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
SPECIFICATION FOR FIELD INSTRUMENTS		

 MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V	
	Section – 5	
REV: R0	CONTROL & INSTRUMENTATION	Page 221 of 718
SR. NO.	ITEM	DESCRIPTION
1.0	<u>FIELD INSTRUMENTS</u>	
	This section provides general hardware guidelines for field instruments and equipment to be supplied under this specification.	
1.1	<u>PRESSURE TRANSMITTER</u>	
1.1.1	Working Principle	SMART, HART Protocol.
1.1.2	Type	2 – Wire.
1.1.3	Output Signal	4-20 mA DC.
1.1.4	Signal Processing	Silicon solid state electronic circuitry.
1.1.5	Measuring Element	Capsule/Diaphragm.
1.1.6	Element material	AISI-316 (Stainless Steel) or better.
1.1.7	Static Pressure	150 % of maximum span continuously, without affecting the calibration.
1.1.8	Turn-down ratio	100:1
1.1.9	Span and Zero	Locally adjustable non-interacting. Facility for elevation and suppression by 100% of span.
1.1.10	Enclosure Class	IP-65.
1.1.11	Output Indicator	LCD Type.
1.1.12	Nameplate	Tag number, service engraved in SS tag plate.
1.1.13	Body	Forged Carbon Steel for air and flue gas application and SS for other

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 222 of 718
SR. NO.	ITEM	DESCRIPTION	
		application.	
1.1.14	Operating Voltage	16 - 48 Volts D.C.	
1.1.15	Load	600 Ohms (min.) at 24 Volts D.C.	
1.1.16	Ambient Temperature	0 - 50 °C.	
1.1.17	Performance :		
	(a) Accuracy	± 0.1% of Span or better.	
	(b) Repeatability	± 0.05% of Span or better.	
	(c) Stability	a) +/- 0.1% of calibrated span for 5 year for ranges upto and including 70 Kg/cm ² b) +/- 0.25% of calibrated span for 5 years for ranges more than 70 kg/cm ² (g)	
1.1.18	Sealing/Isolation	Extended diaphragm with 5 meters SS armoured capillary for viscous fluid applications.	
1.1.19	Accessories	(a) Universal mounting bracket suitable for 2" pipe mounting.	
		(b) High tensile carbon steel U- bolts.	
		(c) Siphon for steam and hot water services.	
		(d) ½" NPT 2-valve stainless steel manifold, constructed from SS316 bar stock.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 223 of 718
SR. NO.	ITEM	DESCRIPTION	
		(e) Companion flange with nuts, bolts and gaskets.	
		(f) Hand held configuration kit for calibration of SMART Transmitter.	
		(g) ½" NPT cable gland.	
1.2	<u>DIFFERENTIAL PRESSURE TRANSMITTER/FLOW TRANSMITTER</u>		
1.2.1	Working Principle	SMART, HART Protocol.	
1.2.2	Type	2-Wire.	
1.2.3	Output signal	4-20 mA DC.	
1.2.4	Signal Processing Unit	Silicon solid-state electronic circuitry.	
1.2.5	Measuring element	Capsule/Diaphragm.	
1.2.6	Element material	AISI-316 (Stainless Steel) or better.	
1.2.7	Static Pressure/Overload Pressure	Maximum line (or static) pressure on either side without permanent deformation or loss of accuracy.	
1.2.8	Turn-down ratio	100 : 1 minimum.	
1.2.9	Span and Zero	Locally adjustable, non-interacting.	
1.2.10	Enclosure class	IP-65.	
1.2.11	Zero suppression/elevation	At least 100% of Span.	
1.2.12	Output Indicator	LCD Type.	
1.2.13	Nameplate	Tag number and Service engraved in SS tag plate.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 224 of 718
SR. NO.	ITEM	DESCRIPTION	
1.2.14	Body	Forged Carbon Steel for air and flue gas application and SS for other application.	
1.2.15	Ambient temperature	0 - 50 °C.	
1.2.16	Operating Voltage	16 - 48 Volts DC.	
1.2.17	Load	600 Ohms (min.) at 24 Volts DC.	
1.2.18	Performance:		
	(a) Accuracy	±0.1 % of span or better.	
	(b) Repeatability	± 0.05 % of span or better.	
	(c) Stability	a) +/- 0.1% of calibrated span for 5 year for ranges upto and including 70 Kg/cm ² b) +/- 0.25% of calibrated span for 5 years for ranges more than 70 kg/cm ² (g)	
1.2.19	Sealing / Isolation	Extended diaphragm with 5 meters SS armoured capillary for viscous fluid applications.	
1.2.20	Accessories	(a) Universal mounting bracket suitable for 2" pipe mounting.	
		(b) High tensile carbon steel U-bolts.	
		(c) Siphon for steam and hot water services.	
		(d) Companion flange with nuts, bolts and gaskets.	

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 225 of 718
SR. NO.	ITEM	DESCRIPTION	
		(e) Hand held configurator kit for calibration of SMART Transmitter	
		(f) ½" NPT cable gland.	
		(g) ½" NPT generally 5-valve stainless steel manifold, constructed from SS316 bar stock. 3 valve manifold for DP application in flue gas and air.	
1.3	<u>DISPLACER TYPE LEVEL TRANSMITTERS</u>		
1.3.1	Type	SMART, HART Protocol.	
1.3.2	Stages of operation	Continuous.	
1.3.3	Material -		
(a)	Displacer	AISI 316 SS.	
(b)	Suspension wire	AISI 316 SS.	
(c)	Torque tube housing	Carbon steel or SS as per application.	
(d)	Torque tube	Inconel.	
(e)	Displacer chamber	CS or SS as per process application.	
(f)	Transmitter Housing	Die cast Aluminium or better.	
1.3.4	Operating Voltage	16-48 Volts D.C.	
1.3.5	Transmission	2-wire.	
1.3.6	Output Signal	4-20 mA DC.	
1.3.7	Signal processing	Solid-state electronic circuitry.	

CONSULTANT : PROCON ENGINEERS

		MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
		BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0		CONTROL & INSTRUMENTATION	Page 231 of 718
SR. NO.	ITEM	DESCRIPTION	
		engineering units or 0-100%	
1.6.10	Output	2 off isolated 4-20mA DC output	
1.6.11	Load	< 750 ohms.	
1.6.12	Power supply	240V AC, 50 Hz.	
1.6.13	Turn Down	100:1.	
1.6.14	Accuracy	± 0.2 % of measured value.	
1.6.15	Enclosure	NEMA4X (IP67) aluminum, Epoxy coated	
1.6.16	Nameplate	Tag number, service engraved in stainless steel tag plate.	
	Notes:		
1.	The above on-line flow meter shall not create any obstruction on flow.		
2.	Users' list shall be submitted to support on proven satisfactory performance for similar process applications.		
1.7	<u>PRESSURE GAUGE AND DIFFERENTIAL PRESSURE GAUGE</u>		
1.7.1	Type	Bourdon / Bellows / Diaphragm.	
1.7.2	Sensing & Socket	AISI-316 SS.	
1.7.3	Movement Material	AISI-304 SS.	
1.7.4	Case Material	Stainless steel, IP-65.	
1.7.5	Dial Size	Generally 150 mm.	
1.7.6	Scale	Black lettering on white in 270 ° arc.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 232 of 718
SR. NO.	ITEM	DESCRIPTION	
1.7.7	Window	Shatterproof glass.	
1.7.8	Range Selection	Normal process pressure: 50~70% of range.	
1.7.9	Over-range Protection	125% of maximum range by internal stop. External stop at zero.	
1.7.10	Adjustment	Micrometer screw for zero. Internal micrometer screw for range.	
1.7.11	Element Connection	Argon welding.	
1.7.12	Process Connection	1/2" NPT(M) Bottom for local, back for panel mounting.	
1.7.13	Performance	Accuracy of ± 1.0 % of span or better.	
1.7.14	Operating ambient	0 - 50 °C.	
1.7.15	Safety Feature	Blow out disc /diaphragm at the back.	
1.7.16	Accessories	(a) Snubbers and Glycerin filled for pulsating fluid applications and at pump discharge.	
		(b) Stainless steel Diaphragm seals for viscous fluids	
		(c) 3-Way SS316 Gauge cock for pressure gauges.	
		(d) 5-valve SS316 manifold from barstock for differential pressure gauge.	
		(e) Siphons for steam and hot water services.	

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 233 of 718
SR. NO.	ITEM	DESCRIPTION	
1.7.17	Applicable standard	IS-3624 / 1996.	
1.7.18	Nameplate	Tag number, service engraved in stainless steel tag plate.	
1.8	<u>TEMPERATURE GAUGE</u>		
1.8.1	Type	Mercury or gas filled.	
1.8.2	Sensing Element Material	Bourdon - AISI-316 SS.	
1.8.3	Capillary Armoring	Stainless steel flexible.	
1.8.4	Movement Material	AISI 304 SS.	
1.8.5	Bulb / Stem Diameter	12 mm.	
1.8.6	Bulb / Stem Material	AISI 316.	
1.8.7	Capillary	Stainless Steel.	
1.8.8	Connection to well	½" NPT.	
1.8.9	Case Material	Stainless steel.	
1.8.10	Dial Size	150 mm in general.	
1.8.11	Scale	Black lettering on white in 270 ° arc.	
1.8.12	Mounting	Surface/Panel.	
1.8.13	Over range Protection	125 % of range or more.	
1.8.14	Instrument connection	Bottom for local and back for panel mounting.	
1.8.15	Range	Normal temperature – 50~70% of range.	
1.8.16	Zero adjuster	Micrometer screw adjustable from front.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 234 of 718
SR. NO.	ITEM	DESCRIPTION	
1.8.17	Window	Shatterproof glass.	
1.8.18	Accuracy	± 1 % or better.	
1.8.19	Enclosure Class	IP-65.	
1.8.20	Capillary	5 meters (local surface)/15.0 meters (local panel) - armoured stainless steel.	
1.8.21	Compensation	Capillary and Case Compensation.	
1.8.22	Accessories	(a) Forged barstock thermowell screwed as per ASME PTC code. Process connection M 33X2 (M). Material of construction of Thermowell: (i) SS 316: In general. (ii) Inconel: For flue gas application. (iii) Tungsten carbide: For coal mill application.	
1.8.23	Nameplate	Tag number, service engraved in stainless steel tag plate.	
1.9	<u>THERMOCOUPLES</u>		
1.9.1	Type	(a) Type-J (Iron Constantan) / Type-K (Chromel Alumel) / Type-R (Pt.-Rhodium Pt.). [As per application]	
		(b) Duplex.	
		(c) Ungrounded.	

CONSULTANT : PROCON ENGINEERS

		MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
		BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0		CONTROL & INSTRUMENTATION	Page 277 of 718
SR. NO.	ITEM	DESCRIPTION	
	(q) Accessories	Special cables, electronics, cabinets etc. as required to make the system complete, with bar/chain.	
	(r) Range	Application dependent.	
	(s) Range increment	0.1% of this selected range.	
	(t) Operating temperature	0 -70 °C	
	(u) Accuracy	± 0.5% FS range	
2.0	<u>CONTROL PANELS/DESK MOUNTED INSTRUMENTS AND ELECTRICAL SYSTEM ACCESSORIES</u>		
2.1	<u>COUPLING RELAY</u>		
2.1.1	Type	Octal base plug-in type/ DIN rail Mounting.	
2.1.2	Coil voltage	24 V D.C. in general / other as required.	
2.1.3	Contact	2 NO & 2 NC (Minimum).	
2.1.4	Contact rating	250 V/5A (A.C)/220V/2A (D.C).	
2.1.5	Operating range	70 to 110% of rated voltage.	
2.1.6	Insulation	2 kV for 1 minutes between terminal & earth.	
2.1.7	Mechanical life	20 million operations.	
2.1.8	Coil protection	Diode.	
2.1.9	Indication	Coil on LED.	

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 278 of 718
SR. NO.	ITEM	DESCRIPTION	
2.1.10	Enclosure	Transparent cover.	
2.1.11	Connection	Screw terminals.	
2.1.12	Mounting	Projection mounting inside panel / DIN rail mounting.	
2.2	<u>DISTRIBUTION BOARDS</u>		
2.2.1	Type	Fixed, Modular.	
2.2.2	Power distribution	Through MCCB.	
2.2.3	Enclosure	Sheet Steel, IP54.	
2.2.4	Mounting	Free standing (Can be attended from both front & back).	
2.3	<u>RECEIVER RECORDER</u>		
2.3.1	Type	Microprocessor Based continuous video chart type. (Paper less)	
2.3.2	Display type	320 x 240 pixels high resolution coloured LCD graphics.	
2.3.3	Number of pen	2/4 as applicable.	
2.3.4	Input	4-20mA DC/1-5 Volt/ RTD/ Thermocouple.	
2.3.5	Display span rate	1, 5, 10, 20, 30 and 60 min / div. Selectable.	
2.3.6	Digital indication	Measured values with engineering unit.	
2.3.7	Trends	Coloured display on screen.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 279 of 718
SR. NO.	ITEM	DESCRIPTION	
2.3.8	Colour of trends	Selectable.	
2.3.9	Performance		
(a)	Accuracy	$\pm 0.1\%$ of span or better. (Indication & Recording)	
(b)	Updation rate	1 Sec or better.	
2.3.10	Input open circuit	Up/Down Scale. (selectable)	
2.3.11	Reference Junction Compensation	Built-in cold junction compensation for thermocouple inputs.	
2.3.12	Power Supply	240 Volt, 1 Ph, 50 Hz A.C.	
2.3.13	Operating ambient temperature range	0-50 °C. (maximum)	
2.3.14	Face Dimension	144 mm (W) x 144 mm (H).	
2.3.15	Depth	300 mm (typical).	
2.3.16	Construction	Case - drawn steel, Bezel- Polycarbonate.	
2.3.17	Readable distance	3 meters (minimum)	
2.3.18	Mounting	Flush panel.	
2.3.19	Accessories	Engraved phenolic nameplate affixed to front flange to identify each recorder by tag number and each pen by color and measured variable. Shunt resistors, Ethernet port, RS232/422a/ 485 port.	
2.3.20	Features	(i) Hi, Hi-Hi, Lo and Lo-Lo contacts each channel.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 280 of 718
SR. NO.	ITEM	DESCRIPTION	
2.3.21		(ii) 2 MB memory for Data acquisition and 100 MB Zip disk.	
		(iii) 3 ½" Floppy disk.	
		(iv) Computation functions like linear scaling, square root, differential and engineering unit and all other mathematical functions.	
		(v) Memory status display, LCD backlight saver.	
		(vi) Event sampling typically 125, 250, 500 msec.	
2.4	<u>MULTIPOINT RECORDER</u>		
2.4.1	Type	Microprocessor Based continuous video chart type. (Paper less)	
2.4.2	Number of Points	6,12 or 24. (as required)	
2.4.3	Input	4-20 mA/1-5V/Thermocouple/RTD.	
2.4.4	Recording	Channel number or dot with different color for each channel.	
2.4.5	Point Selection	Programmable for any combination of points by selection.	
2.4.6	Readable Distance	3 meters. (minimum)	
2.4.7	Data Display	Channel number, alarm status, measured data and engineering data (or Programming Display) in green LEDs.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 281 of 718
SR. NO.	ITEM	DESCRIPTION	
2.4.8	Face Dimension	(i) 144 x 144 mm (approx.) for 6 point.	
		(ii) 252 x 206 mm (approx.) for 12 point.	
		(iii) 305 x 380 mm (approx.) for 24 point.	
2.4.9	Reference Junction Compensation	Built-in.	
2.4.10	Mounting	Flush Panel.	
2.4.11	Performance		
(a)	Accuracy	± 0.5% of span or better.	
(b)	Ambient Temperature effect	± 0.3% of span for 10 °C variation or better.	
(c)	Supply voltage variation effect	± 0.2% of span for 10% variation in supply voltage or better.	
(d)	Frequency variation effect	± 0.1% of span for 2 Hz variation in frequency or better.	
(e)	Operating Position effect	± 0.1% of span for 0-30 Deg. inclined or better.	
2.4.12	Input Open Circuit	Up/Down Scale.	
2.4.13	Power Supply	240 Volt, 1 Phase, 50 Hz AC.	
2.4.14	Operating Conditions :-		
(a)	Temperature	0-50 °C.	
(b)	Relative Humidity	25%-90%.	

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 282 of 718
SR. NO.	ITEM	DESCRIPTION	
(c)	Supply Voltage	-15% to +10%.	
2.4.15	Accessories	Engraved phenolic nameplate affixed to front flange to identify each recorder by tag number and each pen by color and measured variable. Shunt resistors, Ethernet port, RS232/422a/485 port.	
2.4.16	Preferred Features	(i) Hi, Hi-Hi, Lo and Lo-Lo contacts for each channel.	
		(ii) 2 MB memory for Data acquisition and 100 MB Zip disk.	
		(iii) 3 ½" Floppy disk.	
		(iv) Computation functions like linear scaling, square root, differential and engineering unit and all other mathematical functions.	
		(v) Memory status display, LCD backlight saver.	
		(vi) Event sampling typically 125, 250, 500msec.	
2.5	<u>BAR GRAPH INDICATOR</u>		
2.5.1	Type	Bar graph.	
2.5.2	Number of channels	One/Two (as required)	
2.5.3	Input	4-20 mA/1-5 V/Thermocouple/RTD.	
2.5.4	Indication	Green LED / LCD.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 283 of 718
SR. NO.	ITEM	DESCRIPTION	
2.5.5	Scale	100 mm vertical one for each channel graduated in engineering unit. (linear scale)	
2.5.6	Readable Distance	3 meters. (minimum)	
2.5.7	Mounting	Flush panel.	
2.5.8	Face Dimension	36(W) x 144(H) mm (approx) / 72 x 144 (H) mm.	
2.5.9	Resolution	1% of scale or better.	
2.5.10	Power Supply	240V, 1 Phase, 50 Hz AC.	
2.5.11	Operating Conditions :-		
(a)	Temperature	0-50 °C.	
(b)	Relative Humidity	5%-95%.	
(c)	Supply Voltage	-15% to +10%.	
2.5.12	Connection between Indicator and Tray	Prefab Cable.	
2.5.13	Accessories	(i) Mounting Tray.	
		(ii) Engraved phenolic nameplate affixed to front flange to identify each indicator by tag number and each point by measured variables.	
2.5.14	Alarm Facility	1 HI and 1 LO for each channel independently adjustable over span. Voltage free outputs.	
2.5.15	Reference Junction Compensation	Built-in cold junction compensation for	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 284 of 718
SR. NO.	ITEM	DESCRIPTION	
		thermocouple inputs.	
2.5.16	Feature	(i) Alarm level indication by flashing Cursor.	
		(ii) Green Digital display of parameter value in front panel with a 3.1/2 digit display.	
2.6	<u>VALVE POSITION INDICATOR</u>		
2.6.1	Input	4-20 mA DC/1-5 Volts DC.	
2.6.2	Indication	Pointer and Scale. Moving Coil Meter.	
2.6.3	Readable Distance	3 meters (minimum)	
2.6.4	Pointer Deflection	90 Deg Sector or linear.	
2.6.5	Mounting	Flush Panel (Horizontal/vertical)	
2.6.6	Accuracy	±1% or better.	
2.6.7	Protection Class	IP-42.	
2.6.8	Operating Ambient Temp.	0-50 °C.	
2.6.9	Scale	0-100%.	
2.6.10	Bezel Size	DIN Standard.	
2.7	<u>DIGITAL INDICATOR</u>		
2.7.1	Type	Four and half digit LED seven-segment display with sign.	
2.7.2	Face Dimension	72 x 144 mm / 48 x 96 mm. (as applicable)	
2.7.3	Display Character	13.8 mm, Green. (LED)	

CONSULTANT : PROCON ENGINEERS

		MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
		BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0		CONTROL & INSTRUMENTATION	Page 285 of 718
SR. NO.	ITEM	DESCRIPTION	
2.7.4	Accuracy	0.1% of reading, ± 2 digit.	
2.7.5	Input	4-20Ma DC/1-5 V DC/ RTD/ Thermocouple.	
2.7.6	Mounting	Flush Panel.	
2.7.7	Power Supply	240V $\pm 10\%$, 50 ± 2.5 Hz.	
2.7.8	Output Contact	2 nos SPDT, contact rating 5A at 240V AC/ 0.25A at 220V DC.	
2.7.9	Power/Signal Connection	Screwed.	
	Large Display (150x300 mm) indicators shall be provided for MW, MVAR and frequency indications.		
2.8	<u>TOTALIZER / COUNTER</u>		
2.8.1	Type	Electronic.	
2.8.2	Number of digits and digit size	Six, 9 mm high.	
2.8.3	Input	4-20mA DC.	
2.8.4	Reset	Manual.	
2.8.5	Readable distance	3 meters. (minimum)	
2.8.6	Mounting	Flush.	
2.8.7	Performance		
(a)	Accuracy	$\pm 0.5\%$ of span.	
2.8.8	Operating ambient temp.	0 - 50 $^{\circ}\text{C}$.	
2.8.9	Accessories	Engraved phenolic nameplate affixed to front flange to identify tag number and measured variable.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 286 of 718
SR. NO.	ITEM	DESCRIPTION	
2.8.10	Preferred Features	Power supply on/failure LED visible from front.	
2.9	<u>PUSH BUTTON</u>		
2.9.1	Type	Shrouded square format.	
2.9.2	Face Dimension	32 x 32 mm (maximum)	
2.9.3	Contact Configuration	2 NO + 2 NC.	
2.9.4	Contact Addition	Add-on block up to 4 each with 2 pairs of contacts.	
2.9.5	Contact Material	Hard Silver Alloy.	
2.9.6	Contact Rating	500V / 10 A.	
2.9.7	Utilization Category	AC11 / DC11.	
2.9.8	Insulation Voltage	2 kV for 1 minute between terminals and earth.	
2.9.9	Mechanical Life	1 million operation.	
2.9.10	Construction	Aluminium shrouding with plastic lens.	
2.9.11	Colours	Red, Green, Yellow, Black, etc.	
2.9.12	Connection	Screw terminals.	
2.9.13	Enclosure Class	IP-52.	
2.9.14	Legend	Engraving.	
2.10	<u>ILLUMINATED PUSH BUTTON</u>		
2.10.1	Type	Square format.	
2.10.2	Face Dimension	32 x 32 mm. (maximum)	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 287 of 718
SR. NO.	ITEM	DESCRIPTION	
2.10.3	Contact Configuration	2 NO + 2 NC. (minimum)	
2.10.4	Contact Addition	Add-on-Block up to 4 each with 2 pairs of contacts.	
2.10.5	Contact Material	Hard Silver Alloy.	
2.10.6	Contact Rating	500 V/ 10A.	
2.10.7	Utilization Category	A C11 / DC11.	
2.10.8	Insulation Voltage	2 kV for 1 minute between terminals and earth.	
2.10.9	Mechanical Life	1 Million Operation.	
2.10.10	Lamp	LED with built-in resistors as required.	
2.10.11	Lamp Rating :		
(a)	Voltage	240 V AC.	
(b)	Watt	2 Watt (approx.)	
2.10.12	Lamp and Lens Replacement	From front.	
2.10.13	Construction	Transparent Plastic Lens.	
2.10.14	Colour	Red, Green, Amber, Yellow etc.	
2.10.15	Connection	Screw terminals.	
2.10.16	Enclosure Class	IP-52.	
2.10.17	Legend	Engraving.	
2.11	<u>SELECTOR SWITCH</u>		
2.11.1	Type	2/3/4 position stay put type with rotary lever actuator.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 288 of 718
SR. NO.	ITEM	DESCRIPTION	
2.11.2	Face Dimension	32 x 32 mm. (maximum)	
2.11.3	Contact Configuration	4 pair of contacts.	
2.11.4	Contact Addition	Add-on-Block up to 4 each with 2 pairs of contact.	
2.11.5	Contact Material	Hard silver Alloy.	
2.11.6	Contact Rating	500 V/10 A.	
2.11.7	Utilization Category	AC11 / DC11.	
2.11.8	Insulation Voltage	2 kV for 1 minute between terminals and earth.	
2.11.9	Mechanical Life	1 million operation.	
2.11.10	Construction	Aluminium shrouding.	
2.11.11	Connection	Screw terminals.	
2.11.12	Enclosure Class	IP-52.	
2.12	<u>INDICATING LAMP</u>		
2.12.1	Type	LED with built-in resistor.	
2.12.2	Face Dimension	32 x 32 mm. (maximum)	
2.12.3	Voltage	240 V AC.	
2.12.4	Watt	2.5 Watt (approximate).	
2.12.5	Lamp and Lens Replacement	From front.	
2.12.6	Construction	Transparent Plastic lens.	
2.12.7	Colour	Red, Green, Amber, Yellow etc.	
2.12.8	Connection	Screw terminals.	

CONSULTANT : PROCON ENGINEERS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 289 of 718
SR. NO.	ITEM	DESCRIPTION	
2.12.9	Legend	Engraving.	
2.13	<u>INDICATING METERS (A.C)</u>		
2.13.1	Type	Rectifier type.	
2.13.2	Face Dimension	96 x 96 mm.	
2.13.3	Scale	Radial arc of 240 Deg.	
2.13.4	Accuracy	1.5% of full scale. ± 0.5 Hz for frequency meter.	
2.13.5	Input	0-1/0-5A for current measurement, 0-240V, 50 ± 2.5 Hz for voltage/frequency measurement.	
2.13.6	Zero Adjustment	Screw on meter face.	
2.13.7	Enclosure	Shielded Case.	
2.13.8	Mounting	Flush Panel.	
2.13.9	End Scale Suppression	6 times the measuring range only for motor ammeters.	
2.14	<u>INDICATING METERS (D.C)</u>		
2.14.1	Type	Taut band moving coil.	
2.14.2	Face Dimension	96 x 96 mm.	
2.14.3	Scale	Radial arc of 240 Deg.	
2.14.4	Accuracy	1.5% of full scale.	
2.14.5	Input	0-75 mA for current measurement. Direct reading for voltage measurement.	

CONSULTANT : PROCON ENGINEERS

		MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
		BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0		CONTROL & INSTRUMENTATION	Page 290 of 718
SR. NO.	ITEM	DESCRIPTION	
2.14.6	Zero Adjustment	Screw on meter face.	
2.14.7	Enclosure	Shielded case.	
2.14.8	Mounting	Flush Panel.	
2.14.9	End Scale Suppression	2 times the measuring range only for motor ammeters.	
	For electrical system's meter and for synchronization, Bidder shall refer to electrical volume of the specification.		
2.15	<u>AUXILIARY RELAY</u>		
2.15.1	Type	Electromagnetic.	
2.15.2	Coil voltage	240 V A.C / 220V DC. For any other voltage bidder to make his own arrangement.	
2.15.3	Contact Configuration	2 NO & 2 NC (Minimum), additional contacts as per requirement with provision for additional contact block expansion.	
2.15.4	Contact rating	250V/5A. (A.C/D.C.)	
2.15.5	Operating range	80 to 110% of rated voltage.	
2.15.6	Insulation	2 kV for 1 minute between terminals & earth.	
2.15.7	Mechanical life	20 million operations.	
2.15.8	Coil protection	Diode/surge suppressor.	
2.15.9	Connection	Screw terminals.	
2.15.10	Mounting	Projection mounting inside panel.	

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 291 of 718
SR. NO.	ITEM	DESCRIPTION
2.16	<u>ELECTRICAL TRANSDUCER</u>	
		Transducers shall be provided for conversion of AC electrical quantities such as voltage, frequency, current and power. Transducer shall be suitable for 220V DC auxiliary supply. Transducers shall be of low burden type having 4 – 20 mA DC linear galvanically isolated output compatible with secondary indicating instrument. Transducer shall be dual channel type. Accuracy class of Transducers shall be as per IS14570:1998 or IEC688 :992.
2.17	<u>SYNCHROSCOPE</u>	
		Synchroscope shall be designed to provide an illuminate and indication of phase and frequency difference between bus voltage and Generator voltage. It shall denote the actual frequency difference corresponding to the inverse of time taken for one rotation of the illuminated vector spot. The instrument shall be designed for industrial applications, which require precise, reliable and robust instruments for the display range and indication. Synchroscope shall be designed as per the DIN/IEC/BS standards.
2.18	<u>ANNUNCIATION</u>	
2.18.1		PLC based system alarm annunciation system shall be solid state/ microprocessor based and shall include all required logic sequence. Display part of the system shall have panel mounted facia LED array assemblies, sets of alarm accept, reset, mute and test push buttons and panel mounted audible devices.
2.18.2		The system shall be immune to variations in the power supply and shall not generate spurious alarm when the system power is switched on (power-on-reset)
2.18.3		Controller of the PLC/Microprocessor based control system shall be used for configuring the alarm
2.18.4		10% wired spare channels & facia shall be provided in all cases

 MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 292 of 718
SR. NO.	ITEM	DESCRIPTION
2.18.5	ANNUNCIATOR LOGIC	
	(a)	The circuit components for individual windows shall be mounted on plug -in circuit cards.
	(b)	Input shall be provided with contact bounce filtering. The filter shall delay contact inputs for 15 milliseconds to protect against input device bounce and electrical noise on input lines.
	(c)	Critical alarms shall be hardwired to the input card of annunciator controller.
2.18.6	<u>OTHER TECHNICAL PARTICULARS</u>	
	(a)	Type of contact NO or NC configurable
	(b)	Contact interrogation voltage 24 V DC
	(c)	Window drivers. Electronically short circuit protected, current limiting with automatic recovery
	(d)	Facia dimension 75 mm (W) X 50 mm (H)
	(e)	LED per facia 8 nos./Window
	(f)	Flash rate Adjustable (slow, fast, intermittent)
	(g)	Inscription Type Etched on photo film (sandwiched)
	(h)	Inscription letter height 5 mm (min.)
	(i)	No. of row of inscription/ facia 4 (max.)
	(j)	No. of letters/row 14 (max.)

CONSULTANT : PROCON ENGINEERS

		MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
		BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0		CONTROL & INSTRUMENTATION	Page 293 of 718
SR. NO.	ITEM	DESCRIPTION	
	(k) Colour of letters	Black (for white windows)	
	(l) Facia front cover	Hi-impact polystyrene	
	(m) Facia rear plate	Translucent plastic	
	(n) Colour of background	Milk white and red for critical / trip.	
	(o) Fascia block plate	Cold rolled sheet steel epoxy painted.	
	(p) Audible alarm	Cone type speaker	
	(q) Tone generator	Electronic with adjustable tone, amplitude and frequency	
	(r) Preferred sequence	(i) Ordinary Channel : ISA-S-18.1-1979-R	
		(ii) First-up channel : ISA-S-16.1-1979- F3M3	
NOTE:			
1. Instruments which are open to atmosphere should be covered with proper canopy.			
3.0 <u>CONTROL VALVES, ACTUATORS & ACCESSORIES</u>			
General Technical Guidelines for the Control Valves shall be as follows :			
(a) Bidder shall exercise caution in selecting severe service control valves like BFP recirculation valves, HP & LP bypass valves, superheater & reheater attemperator valves, PRDS valves for Boiler & Turbine, Soot blower steam pressure control valve, control valves whose down stream are connected to vacuum such as HP/LP heater emergency level control, condenser make up water control valve, separator level control and CEP minimum flow control valve. For such critical applications, Bidder shall offer valves which are proven			

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 300 of 718
4.0 <u>CONTROL DESK / PANELS / RACKS</u>		
(a) Convenient and logical approach to operational interfaces and aesthetics in the overall view of the panel /desk shall be considered. (b) For items susceptible to vibration, suitable anti-vibration padding shall be provided to prevent damage or malfunction. (c) All items inside the panels/cabinets shall be neatly arranged with easy access/maintenance approach. (d) Incoming power supply feeders shall be duplicated . Alarm shall be provided for failure of a power supply feed. (e) Desk/panel shall be provided with interior illumination, utility receptacles with plug and cooling fan. (f) Panel/Desk shall have gland plate at cable entry to panel. Thickness of gland plate shall not be less than 3 mm. (g) Wire shall be routed/laid through covered trough. (h) Crating of the panels and desks shall be suitable for protection against shock, vibration, inappropriate handling and inclement weather conditions during transportation and warehousing. Mounted equipment shall have adequate protection against damage during handling, transit and storage. Suitable desiccant shall be used inside the packing case. (i) Nameplate (i) Nameplate shall be provided for instrument or device mounted on the panel. (ii) Nameplates for panels shall be provided both in front and rear. (j) All local control panels shall be housed in air condition environment.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 301 of 718
4.1 <u>CONTROL DESK</u> 4.1.1 Devices mounted on the desk shall be flush type. Devices shall be so mounted that their removal and replacement can be accomplished without interruption of services to others. 4.1.2 Desk shall be ergonomically designed to suit working on a 24 X 7 basis. Aesthetics, ergonomics and illumination shall be considered while positioning of the desk, large video screen and panels in control room. 4.1.3 Control desk shall be free standing floor mounting type of table-top design with compartments for locating the hardware. Desk shall be constructed from aluminum extrusion with high pressure laminate MDF board for work surface of approved colour. Aluminium structure shall be anodized or powder coated paint finish. Thickness of sheet shall not be less than 3 mm. 4.1.4 Monitors with retractable keyboard, emergency push buttons shall be provided on the desk. Desk shall be arranged in arc-like shape without any sharp edges. Edges shall be extruded PVC or rounded post-formed laminate. 4.1.5 Desk shall be of modular, scalable and industrially ruggedized design and shall have Telephones and Intercom connections. 4.1.6 Desk shall have concealed cable trays for wire dressing. 4.1.7 Design shall include Earthing bolts. 4.1.8 Back installed items shall be suitably concealed from front view. 4.2 <u>BACK UP PANEL</u> 4.2.1 Construction shall be from sheet steel of thickness not less than 3 mm. 4.2.2 Electrical upright Panel construction & design shall be similar to back up panel. Control switches, meters, indicators, synchronizer, excitation control switch, annunciation window etc. along with associated mimic diagram, as recommended, shall be provided for manual synchronization of generator.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 302 of 718
4.2.3 Cabinets/Enclosure/Panels (a) Material of construction : Cold rolled steel sheet. (b) Thickness of Sheet : (i) 2.0 mm for faces supporting instruments / terminals. (c) Construction : Welded throughout as per approved National Standards. (d) Panel height : 2300 mm. (approx) (e) (i) Corners : 7 mm inner radius. (ii) Dimensional : a. In height & length - 3 mm. (iii) Tolerances : b. In height between adjacent sections - 2 mm. : c. Total for a group - 6 mm. (f) Doors : Double, recessed, turned back edges. (i) Thickness of Sheet : 2 mm. (ii) Hinges : Stainless steel. (iii) Door latches : Three point type. (iv) Door gaskets : Neoprene rubber on fixed frame to result dust proof/weatherproof enclosure. (v) Opening of the doors : Outward. (vi) Louvers : With removable wire mesh to ensure dust and vermin proof. (g) Color of interior : Brilliant white. (h) Colour external : RAL 7032.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V																																																
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5																																																
REV: R0	CONTROL & INSTRUMENTATION	Page 303 of 718																																																
<table><tr><td>(i)</td><td>Painting</td><td>:</td><td>Epoxy powder coated or better.</td></tr><tr><td>(j)</td><td>Gland plates</td><td>:</td><td>Removable 3 mm thick. (bottom)</td></tr><tr><td>(k)</td><td>Cable entry</td><td>:</td><td>Bottom.</td></tr><tr><td>(l)</td><td>Hardware</td><td>:</td><td>(i) Anti vibration pad- 15 mm.</td></tr><tr><td></td><td></td><td>:</td><td>(ii) Predrilled base channel ISMC - 10 or equivalent for all sides.</td></tr><tr><td></td><td></td><td>:</td><td>(iii) Stainless steel buff- finished 2 mm thick kick plate for all sides.</td></tr><tr><td></td><td></td><td>:</td><td>(iv) Stainless steel scratch strips along desk edges fixed with pan-head recessed screws.</td></tr><tr><td></td><td></td><td>:</td><td>(v) Rubber strips to ensure air tightness between kick plate and finished floor.</td></tr><tr><td></td><td></td><td>:</td><td>(vi) Lifting hook / Eye bolt.</td></tr><tr><td></td><td></td><td>:</td><td>(vii) Drawing pocket.</td></tr><tr><td></td><td></td><td>:</td><td>(viii) Door switch, lamps, thermostat, heaters and fans.</td></tr><tr><td>(m)</td><td>Enclosure Protection</td><td>:</td><td>As per environment condition of the area of installation. Refer section-1 of this vol.</td></tr></table>			(i)	Painting	:	Epoxy powder coated or better.	(j)	Gland plates	:	Removable 3 mm thick. (bottom)	(k)	Cable entry	:	Bottom.	(l)	Hardware	:	(i) Anti vibration pad- 15 mm.			:	(ii) Predrilled base channel ISMC - 10 or equivalent for all sides.			:	(iii) Stainless steel buff- finished 2 mm thick kick plate for all sides.			:	(iv) Stainless steel scratch strips along desk edges fixed with pan-head recessed screws.			:	(v) Rubber strips to ensure air tightness between kick plate and finished floor.			:	(vi) Lifting hook / Eye bolt.			:	(vii) Drawing pocket.			:	(viii) Door switch, lamps, thermostat, heaters and fans.	(m)	Enclosure Protection	:	As per environment condition of the area of installation. Refer section-1 of this vol.
(i)	Painting	:	Epoxy powder coated or better.																																															
(j)	Gland plates	:	Removable 3 mm thick. (bottom)																																															
(k)	Cable entry	:	Bottom.																																															
(l)	Hardware	:	(i) Anti vibration pad- 15 mm.																																															
		:	(ii) Predrilled base channel ISMC - 10 or equivalent for all sides.																																															
		:	(iii) Stainless steel buff- finished 2 mm thick kick plate for all sides.																																															
		:	(iv) Stainless steel scratch strips along desk edges fixed with pan-head recessed screws.																																															
		:	(v) Rubber strips to ensure air tightness between kick plate and finished floor.																																															
		:	(vi) Lifting hook / Eye bolt.																																															
		:	(vii) Drawing pocket.																																															
		:	(viii) Door switch, lamps, thermostat, heaters and fans.																																															
(m)	Enclosure Protection	:	As per environment condition of the area of installation. Refer section-1 of this vol.																																															
4.3 <u>LOCAL INSTRUMENT RACKS & ENCLOSURE</u>																																																		
4.3.1 General Requirements																																																		
(a) Devices located in the field shall be grouped and installed in the enclosure (Closed Rack) in outdoor areas such as Boiler area etc. and in Open Type Rack in covered areas such as TG Building.																																																		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 304 of 718
(b) Racks and enclosure shall be factory prefabricated & painted and shall complete with internal piping, tubing, manifold, isolation valves, blowdown valves, integral junction box, illumination etc., (c) No more than six instruments shall be grouped in a single rack/ enclosure. (d) Racks shall be installed above the tapping points for air, flue gas and coal air mixture application whereas for applications such as for water and steam, racks to be installed below the source point. (e) Attention shall be paid in the layout to avoid air traps in liquid piping and water accumulation in air/gas piping. (f) Welding of impulse lines shall comply with the provisions of the latest applicable ANSI Code for Pressure Piping. (g) Instrument piping and tubing shall be hydrostatically tested at one and one-half times the maximum system pressure except for low pressure and vacuum measurement for which the test pressure will be as per piping standard. (h) Service air connection shall be provided for continuous and intermittent purging of impulse pipe in dusty medium. Continuous purging shall be adopted for differential pressure measurement such as flue gas and coal air mixture application. Pressure measurement shall have only intermittent purging whenever required. In case of continuous purging, an air header shall be formed which shall receive service air through isolation valve and air filter regulator. Air shall be fed from the air header to both the impulse pipes near to take off points through isolation valves and flow regulators. Air header shall be constructed from stainless steel. Impulse pipe for such applications shall have a four-way valve. One port of the valve shall have an adaptor to connect flexible stainless steel braided nylon hose to the service air. Rating of the hose shall not be less than 10 Kg/sq.cm. Four way valve shall have two position operations. One position for service and other one for purging. Required pressure gauges shall be provided for monitoring of air pressure. Complete purging arrangement shall be integral to the enclosure and racks.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 305 of 718
(i) Gate or ball type (full ported) instrument isolation valve and globe type blow down drain valve adequate for duty requirement and for withstanding continuous design pressure and temperature of main process medium shall be provided in the hook up plumbing. For process pressure equal or above 40 kg/ sq.cm single instrument isolation valve and double blowdown valves shall be used before connecting to blowdown header. Whereas for line pressure less than 40 kg/sq.cm, single instrument isolation valve and single blow down valves can be used before connecting to blow down header. Instrument manifolds shall be non integral and shall be installed close to the instrument. (j) Drawing No. PE-189-IN-SK-8004/P0 (Sheets 10) shall be referred for typical arrangement of Local instrument enclosure and rack. 4.3.2 Closed Instrument Rack (a) Enclosure shall be free standing type. Racks shall be adequately reinforced to ensure true surfaces and to provide support. Major load-bearing posts shall be suitably supported by gusset plates or moment members. (b) Enclosure outer shall be constructed from at least 3 mm thick steel plate and epoxy painted to shade gray. Base frame shall be made of ISMC 100 and black color finish. (c) 2" NB galvanized pipes shall be laid horizontally and supported at two end channels to mount transmitters at accessible height. Center posts or any member, which would reduce access, shall be avoided. (d) Double leaf interlocking front opening doors with three point locking shall be provided and shall be arranged for maximum possible access to the interior. Key shall be of identical for all enclosures. (e) Doors shall have concealed quick removal type pinned stainless steel hinges and locking handles. Gaskets shall be used between all mating sections to achieve dust and weather proof enclosure rated for IP-65 including the internal junction box.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 306 of 718
(f) Removable type bulkhead plates of thickness not less than 6 mm shall be mounted at the racks with suitable high temperature gasket. Impulse lines within the enclosures shall be properly clamped. (g) All internal wirings between the instruments and junction box shall run through flexible conduits. (h) Racks shall have a common blowdown drain header, which will connect individual instrument blowdown line after suitable pressure breaking through regulating globe type blowdown valves. Header shall be of 2" NB ASTM A 106, Sch-80 Gr. C installed at a slope of 1:25 and extended beyond the rack for connection to plant drain header. (i) Each rack shall be provided with one receptacle, light fixtures each at instrument & Junction box compartments with wire guard. 4.3.3 Open Instrument Rack (a) Rack shall be free standing type constructed from 6 mm thick steel channel frame provided with a canopy to protect the instrument from dripping water or falling objects and shall be epoxy painted. Rack Major load-bearing posts shall be suitably supported by gusset plates or moment members. Suitable protective grill shall be welded to the end-posts of the rack to outline a boundary beyond which no mounted equipment shall project. Canopy shall be of CRCA steel sheet of at least 3 mm thickness. Center posts or any member, which would reduce access, shall be avoided. (b) 2" NB galvanized pipes laid horizontally and supported at two end channels shall be employed at working accessible height for mounting of instruments. (c) All internal wirings between the instruments and junction box shall run through flexible conduits. No exposed wirings are admissible. (d) All racks shall have a common blowdown drain header, which will connect individual instrument blowdown line after suitable pressure breaking through regulating globe type blowdown valves. Header		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 307 of 718
shall be of 2" NB ASTM A 106, Sch-80 Gr. C installed at a slope of 1:25 and extended beyond the rack for connection to plant drain header. 4.3.4 Junction Box Junction boxes of metallic construction. (a) Junction box shall be provided at a dry compartment at one side of the enclosure/rack with front opening type door. Junction box shall be of sheet steel construction with thickness not less than 2 mm. Earth stud shall be furnished at rack for safety grounding. (b) Terminals shall be screwless cageclamp type of reputed make and 20% spare terminals shall be furnished in the junction box.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 422 of 718
10.0	<u>CONTROL & INSTRUMENTATION CABLE</u>	
10.1	Cables shall be flame retardant low smoke (FRLS) type. In hazardous areas cables of suitable R/L ratio shall be provided for intrinsic safety.	
10.2	Durable marking shall be provided on the surface of the cable at intervals not exceeding 5 mtrs. Marking shall include Manufacturer's name, Year of manufacture, Voltage grade, Type of cables (Conductor size & no. of pairs/ triads/type of compensating /extension cable), Insulation material, FRLS etc. Sequential length marking shall also be provided at every meter interval on outer sheath of cable.	
10.3	Standard seasoned wooden drum containing minimum 500 /1000 M $\pm$ 5% length. Drum shall be anti rodent, anti termite and smooth finish. Both end of cable shall be capped by means of non hygroscopic sealing material.	
10.4	<u>THERMOCOUPLE EXTENSION & COMPENSATING CABLE</u>	
	(a) Conductor	: Solid conductor.
	(b) Conductor size	: 16 AWG (1.31 Sq. mm)
	(c) Type	: KX (Extension) (Chromel Alumel) RX (Compensating) (Copper-Copper alloy) JX (Extension) (Iron Constantan).
	(d) Conductor Insulation	: HR PVC Type-C (IS-5831,1984) 0.6 mm thick.
	(e) Operating Voltage	: 300V /500V RMS (Core to earth / core to core).
	(f) Twisting	: Pair twisted with lay of 60 mm (max)
	(g) Twisting Direction	: All pairs in the same direction. Lapped to form bunch with mylar tape.

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 423 of 718
(h) Screen (Pair & Overall) : Aluminium mylar tape with a thickness of 28 μm (min.) for individual pair screen and 60 μm (min.) for overall screen with 100% coverage and 25% overlapped edges. Over the individual pair screening tape two laps of 0.05 mm thick (min.) polyester tape shall be applied with minimum overlap of 25%. Metallic side of the screen shall be in contact with drain wire. (i) Drain wire : Annealed tinned copper wire, stranded. Size 0.5 Sq. mm. (No. of strands/size:- 7/0.3mm) (j) Inner Sheath : Extruded FRLS PVC (anti rodent, anti termite & moisture resistant properties) HR PVC Type ST2 of IS-5831,1984 Thickness as per IS-1554Part-I 1976. (k) Rip Cord : Non metallic under sheath. (l) Armouring : GI wire/strip as per IS 3975. (m) Outer Sheath : Extruded FRLS PVC (anti rodent, anti termite & moisture resistant properties) HR PVC Type ST2 of IS-5831,1984 Thickness as per IS-1554Part-I 1976. (n) Filler : Non hygroscopic with FRLS property. (o) Temperature Range : Up to 85 $^{\circ}\text{C}$. (p) Insulation at 20^o C : 100 MOhms/Km [Min]. (q) Capacitance at 800 Hz : 120 nf/km.			

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 424 of 718
(r)	Cross talk	:	60 dB.
(s)	Attenuation	:	1.2 dB/Km
(t)	Codes & Standards	:	IEC 332-1. ANSI MC 96.1. IS-8784-1987.
(u)	Tests		(i) Oxygen Index: Min.29 at room temp. (ASTM-D-2863) (ii) Acid Gas Gen.: Max.20% by weight as per IEC 754 Part-I (iii) Temp Index : Min 250 DEG C at 21 Oxy. Ind. (ASTM-D-2863) (iv) Smoke Density Rating : Max.60% (ASTM-D-2843). (v) Flammability Test : as per IEC 332 Part-I/IEEE-383 Swedish Chimney Test - SS-424-1475 F3. (vi) High voltage test Core to core- 1.5 kV for 1 min. Core to screen-1.0 kV for 1 min. (vii) Insulation Resistance 100 M Ohm/Km Min. (viii) Rodent & Termite repulsion test (Presence of lead shall be confirmed)

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 425 of 718

- (v) Conductor material & sheath color for thermocouple cable as per ANSI MC 96.1.

CABLE TYPE	OVERALL SHEATH COLOR	WIRE	SHEATH COLOR	CONDUCTOR MATERIAL
KX	Yellow	Positive	Yellow	Nickel / Chromium
		Negative	Red	Nickel / Aluminum
JX	Black	Positive	White	Iron
		Negative	Red	Constantan
RX	Green	Positive	Black	Copper
		Negative	Red	Copper Nickel Alloy

- (w) Durable printed or embossed numbering at regular interval of 50mm shall be provided for identification of pairs.

10.5 INSTRUMENTATION MULTI PAIRED SIGNAL CABLE

- (a) Conductor type : Stranded (7) annealed tinned copper.
- (b) Conductor size : 0.5/1.0/1.5 Sq.mm. (as required)
- (c) Conductor resistance : 39 Ω /Km/18 Ω /Km/12 Ω /Km.
- (d) Conductor Insulation : HR PVC Type-C (IS-5831,1984) 0.6 mm thick.
- (e) Operating Voltage : 300/500V RMS. (Core to earth/core to core)
- (f) Twisting : Twin twisted with lay of 60 mm.

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 426 of 718
(g) Twisting Direction : All pairs in the same direction. Lapped to form bunch with mylar tape. (h) Screen (Pair & Overall) : Aluminium mylar tape with a thickness of 28 μm (min.) for individual pair screen and 60 μm (min.) for overall screen with 100% coverage and 25% overlapped edges. Over the individual pair screening tape two laps of 0.05 mm thick (min.) polyester tape shall be applied with minimum overlap of 25%. Metallic side of the screen shall be in contact with drain wire. (i) Drain wire : Analog signals- Individual pair & overall shield to be considered. Binary signals- overall shield to be considered. Annealed tinned copper wire, stranded. Size 0.5 Sq. mm. (No. of strands / size:- 7 / 0.3mm) (j) Inner Sheath : Extruded FRLS PVC (anti rodent, anti termite & moisture resistant properties) HR PVC Type ST2 of IS-5831,1984 Thickness as per IS-1554, Part-I 1976 (k) Rip Cord : Non metallic under sheath. (l) Armouring : GI wire/strip as per IS 3975 (m) Outer Sheath : Extruded FRLS PVC (anti rodent, anti termite & moisture resistant properties).		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 427 of 718
HR PVC Type ST2 of IS-5831,1984. Thickness as per IS-1554, Part-I 1976. (n) Filler : Non hygroscopic with FRLS property. (o) Temperature Range : 85 °C. (p) Insulation at 20 : 100 MOhms/Km [Min] Deg.C (q) Capacitance at 800 : 120 nf/km Hz (r) Cross talk : 60 dB. (s) Attenuation : 1.2 dB/Km. (t) Codes & Standards : (i) IPCEA-S-61-402. (ii) BS 5308. (iii) IEC 332-1. (iv) ASTM-B-33. (v) IS-8130-1984. (vi) IS 1554 Part-1. (vii) IS 10810. (u) Sheath color : Inner- Black and Outer- Gray. (v) Tests (i) Oxygen Index: Min.29 at room temp. (ASTM-D-2863). (ii) Acid Gas Gen.: Max.20% by weight as per IEC 754 Part-I. (iii) Temp Index: Min 250 ° C at 21Oxy. Ind. (ASTM-D-2863).		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V																											
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5																											
REV: R0	CONTROL & INSTRUMENTATION	Page 428 of 718																											
(iv) Smoke Density Rating: Max.60% (ASTM-D-2843). (v) Flammability Test : as per IEC 332 Part-I. (vi) Swedish Chimney Test-SS-424-1475 F3. (vii) Insulation Resistance 100 M Ohm / Km Min. (viii) High voltage test Core to core- 1.5 kV for 1 min. Core to screen- 1.0 kV for 1 min. (ix) Rodent & Termite repulsion test (Presence of lead shall be confirmed). (w) Colour of core for Instrumentation Cable (As per IS-9938) <table border="1"> <thead> <tr> <th>PAIR</th><th>CORE</th><th>COLOR</th></tr> </thead> <tbody> <tr> <td>1st</td><td>1st</td><td>Blue</td></tr> <tr> <td>1st</td><td>2nd</td><td>Red</td></tr> <tr> <td>2nd</td><td>1st</td><td>Gray</td></tr> <tr> <td>2nd</td><td>2nd</td><td>Yellow</td></tr> <tr> <td>3rd</td><td>1st</td><td>Green</td></tr> <tr> <td>3rd</td><td>2nd</td><td>Brown</td></tr> <tr> <td>4th</td><td>1st</td><td>White</td></tr> <tr> <td>4th</td><td>2nd</td><td>Black</td></tr> </tbody> </table>			PAIR	CORE	COLOR	1 st	1 st	Blue	1 st	2 nd	Red	2 nd	1 st	Gray	2 nd	2 nd	Yellow	3 rd	1 st	Green	3 rd	2 nd	Brown	4 th	1 st	White	4 th	2 nd	Black
PAIR	CORE	COLOR																											
1 st	1 st	Blue																											
1 st	2 nd	Red																											
2 nd	1 st	Gray																											
2 nd	2 nd	Yellow																											
3 rd	1 st	Green																											
3 rd	2 nd	Brown																											
4 th	1 st	White																											
4 th	2 nd	Black																											

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 429 of 718
Above 4 Pairs, 4 Pairs making a unit shall have indelible printed colour coded bands like Pink for 1st unit, Orange for 2nd unit and Violet for 3rd unit and so on. In addition band marking, for example single band for 1st. unit, double band for 2nd. unit and so on, shall be provided on each conductor for identification of unit. Band marking on individual core shall be provided at regular intervals not exceeding 50 mm. 10.6 Cables near high temperature zone shall be capable of withstanding high temperature and terminated in junction box / panel in normal temperature zone. Teflon insulated and sheathed thermocouple extension cables and copper conductor cables shall be used in high temperature zone. Conductor and sheath shall be extruded FEP (Teflon) as per VDE 0207 Part 6 and ASTM D 2116. These cables shall be pair, multipair, triad, multitriad and twisted & shielded. 10.7 <u>CONTROL & POWER CABLE</u> Bidder shall refer to Volume IVB of the electrical specification for detail. 11.0 <u>ERECTION HARDWARE</u> This section provides the general technical guidelines for the erection materials for instruments. All erection materials shall be of good quality and conform to the operating environment of the corresponding instrument. 11.1 <u>ELECTRICAL ACCESSORIES</u> Electrical conduit and associated materials shall conform to the requirements of the articles which follow: (a) Rigid Steel Conduit (i) Conduits up to and including 25 mm shall be of 16 SWG and conduits above 25 mm shall be of 14 SWG. Minimum size of conduits shall be 19 mm. (ii) Each piece of conduit shall be straight, free from blister and other defects and covered with capped bushing at both ends.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 430 of 718
(iii) All rigid conduit couplings and elbows shall be hot dip galvanized rigid mild steel in accordance with ANSI C 80.1 and UL6. The conduit interior and exterior surfaces shall have a continuous zinc coating with an over coat of transparent enamel or zinc chromate. Conduits shall be furnished in standard length of 3 meters, threaded at both ends. (iv) All conduit fittings shall conform to the requirements of ANSI C 80.4 and UL-514 where these standards apply. (b) Flexible Conduit (i) Flexible conduit shall be of three-layer construction of very high quality of lead coated steel. Outside and inside layer shall be reinforced with heat resistant material. (ii) Lead coating outside and inside of the conduit steel surface shall provide a non-corrosive characteristic particularly in acidic atmosphere. Besides flexibility, this shall be strong enough to stay at the desired profile without support and shall be durable and strong so as to offer sufficient mechanical protection. It shall also be fully liquid dust and air tight and shall withstand a continuous hydraulic pressure up to 2 Kg/ Sq. cm and temperature up to 200 °C. (c) Special Fittings (i) Conduit sealing and fittings shall be provided as required and shall be consistent with the area and equipment with which they are installed. (ii) Double locknuts shall be provided on all conduit terminations not provided with threaded lugs and couplings. Locknuts shall be designed to securely bond the conduit to the enclosure when tightened. Locknuts shall not loosen due to vibration.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 431 of 718
11.1.1 Electrical Junction Box (a) Type of Enclosure : Dust tight & weatherproof conforming to IP 65. (b) Material : 3 mm sheet steel (c) Type of Cover : Solid unhinged with retention chain. (d) Paint : External - RAL 7032, Internal – Brilliant White. (e) Mounting : Surface (f) Cable Entry : 3 mm (min) Gland plate (g) Gasket : Neoprene (h) Grounding : Brass earth lug with green screw head External-2 nos , Internal-1no.M6. (i) Number of Drain Holes : Two at bottom capped. (j) Identification : Label for JB and Tags for cable. (k) Accessories : (i) Rail mounted cage clamp type screwless terminals with markers. : (ii) Cable gland : (iii) Ferrules : (iv) Canopy at top 11.1.2 Cable Gland (a) Type : Double compression (b) Entry Thread : NPT		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 432 of 718
(c) Material (d) Finish (e) Protection (f) Accessories 11.1.3 Cable Tray (a) Material (b) Thickness (c) Finish (d) Perforation (e) Cover 11.2 11.2.1 Seamless Stainless Steel Pipe (a) Reference (b) Material Grade (c) Type (d) Size (e) Schedule (f) Standard Length : Brass : Cadmium Plated : IP 54 or better : Neoprene gasket, locknuts, reducers etc. (a) Material : Mild steel, slotted (b) Thickness : not less than 2.0 mm (c) Finish : Hot dip galvanized (d) Perforation : As per MFR standard (e) Cover : Suitable for tray <u>PROCESS HOOK UP ACCESSORIES & SPECIFICATION</u> Material and rating of the hook up items shall suit the piping and fluid condition. Hook up materials shall be IBR certified for applicable cases. Bidder shall furnish hook up drawings and the drawings for open racks & closed racks for owner's approval. (a) Reference : ASTM A-312 TP 316 (b) Material Grade : TP 316 (c) Type : Seamless /Plain end (d) Size : ½" NB (e) Schedule : 40 (f) Standard Length : 5 meter		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 433 of 718
11.2.2 Stainless Steel Pipe Fittings (a) Reference : ASTM A-182 F 316 / ANSI B16.11 (b) Type : Forged (c) Rating : 3000 lbs / 6000 lbs / 9000 lbs (d) Size : ½" NB (e) End connection : Generally socket weld (f) Type of Fittings : Reducing coupling, male-female reducer, straight coupling, equal tee, three piece union, elbow, cap etc. 11.2.3 Seamless Stainless Steel Tube (a) Reference : ASTM A-213 TP 316 (b) Material Grade : TP 316 (c) Size : ½" OD X 2.1 MM Thick (d) Type : Cold drawn annealed, pickled, passivated, de-scaled, hydraulically cleaned seamless tube. (e) Properties : The tube shall be free from scratches and suitable for bending and capable of being flared by hardened and tapered steel pin. The expanded tube shall show no crack or rupture. Hardness shall be RB 80. (f) Test Pressure : 400 Kg/Sq. cm (minimum) (g) Tolerance : ± 0.13 mm for outside diameter		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 434 of 718
± 15 % for wall thickness. (h) Standard Length : 5 meter (i) Test : Flare, Hardness, Ball and Bubble Test. 11.2.4 Stainless Steel Tube Fittings (a) Reference : ASTM-A-182 (b) Type : Double ferrule double compression. (c) Material : 316 Stainless steel forged. (d) Ferrule : 316 Stainless Steel. (e) Type of Fittings : Male/female connector, elbow, cross /equal tee, straight connector, bulkhead union, ferrule etc. as required to suit installation. (f) Size : To suit SS tubing and NPT end connection. 11.2.5 C.S. Pipe (a) C.S. Pipe : ASTM-A 106 Gr. C (b) Material : Cold drawn seamless black C.S (c) Type : Seamless/Plain ends. (d) Size : ½" NB (e) Schedule : 80, 160, XXS as required. (f) Standard Length : 6 meter		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 435 of 718
11.2.6 C.S. Pipe Fittings (a) Reference : ASTM-A 105/ANSI B16.11 (b) Type : Forged (c) Rating : 3000 lbs/6000 lbs/9000 lbs (d) Size : ½" NB (e) End connection : Generally socket weld. (f) Type of Fittings : Reducing coupling, male-female reducer, straight coupling, equal tee, three piece union, elbow, cap etc. 11.2.7 A.S. Pipe (a) Reference : ASTM-A 335 P22 AS PER ANSI B 36.10 (b) Material : Cold drawn seamless A.S (c) Type : Seamless / Plain ends (d) Size : ½" NB (e) Schedule : XXS (f) Standard Length : 5 meter 11.2.8 A.S. Pipe Fittings (a) Reference : ASTM-A 182 F22 AS PER ANSI B 16.11 (b) Type : Forged (c) Rating : 9000 lbs (d) Size : ½" NB		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 436 of 718
(e) End connection : Generally socket weld (f) Type of Fittings : Reducing coupling, male-female reducer, straight coupling, equal tee, three piece union, elbow, cap etc. 11.2.9 Carbon Steel Globe Valve (a) Reference : ASTM A-105 (b) Type : Globe (c) Construction : Forged Body Cadmium Plated. (d) End Connection : ½" Socket Weld (e) Rating : CL. 800 / CL. 2500 (f) Material : Body - Carbon steel Stem - Hardened Steel Plug - AISI 316 SS Seat- Stainless steel stellited (g) Packing : Teflon / Grafoil as required (h) Yoke : ASTM A105 (i) Handwheel : Carbon steel (j) Design standard : As per ANSI B 16.34 11.2.10 Stainless Steel Globe Valve (a) Reference : ASTM A-182 F316 (b) Type : Globe (c) Construction : Forged Body (d) End Connection : Socket Weld (e) Proof Pressure : 400 Kg/Cm2 (f) Material : Body - Stainless steel		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 437 of 718
Stem - Hardened Steel Plug - AISI 316 SS Seat- Stainless steel stellited (g) Packing : Teflon as required (h) Yoke : ASTM A182 F316 (i) Handwheel : Carbon steel (j) Design standard : As per ANSI B 16.34 11.2.11 Alloy Steel Globe Valve (a) Reference : ASTM A-182 F22 (b) Type : Globe (c) Construction : Forged Body (d) End Connection : ½" Socket Weld (e) Rating : CL. 2500 (f) Material : Body - Alloy steel Stem - Hardened Steel Plug - AISI 316 SS Seat- Stainless steel stellited (g) Packing : Grafoil as required (h) Yoke : ASTM A182 F22 (i) Handwheel : Carbon steel (j) Design standard : As per ANSI B 16.34 11.2.12 Condensate Pot (a) Reference : ASTM A182 F22 /ASTM A105 (b) Material : Alloy steel/carbon steel as per applicatio		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 438 of 718
(c) Construction : Drilled from bar stock (d) End connection : 3 nos. ½" socket weld end (e) Accessories : Vent valves 11.2.13 Instrument Valve Manifold (f) Type : (i) Two valve manifold : (ii) Five valve manifold (g) Mounting : Remote 2" Pipe Mounting (h) Construction : Single block (bar stock) (i) Material : Forged body and bonnet AISI 316 stainless steel. (j) Ports : 1/2 " NPT (F) (k) Rating : 420 Kg/Sq. cm at ambient (l) Operating Temperature : (-) 30 to (+) 170 Deg C (m) Packing : PTFE Wafer (n) Seat & Stem : AISI 316 SS (o) Plug : AISI 316 SS free to turn on stem/17-4 PH. (p) Handle Bar : AISI 316 SS (q) Connection : Straight (r) Accessories : (i) Plugs for all ports. : (ii) Mounting Bracket , bolts , nuts.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 5
REV: R0	CONTROL & INSTRUMENTATION		Page 439 of 718
11.3	<u>PNEUMATIC HOOK UP ACCESSORIES</u>		
11.3.1	Air Header	:	
	(a) Technical Particulars	:	For Panel For Field
	(b) Material of Construction	:	Stainless steel Stainless steel
	(c) Inlet Connection	:	2" NPT (M) 1" NPT (M)
	(d) Header Take-off	:	Stainless steel Stainless steel
	(e) Take off connection	:	1 / 2" NPT (M) 1/ 2" NPT (M)
	(f) Tube Take-off	:	Tube adapter on valve Tube adapter on valve
	(g) Drain	:	SS drain valve at lowest point SS drain valves at lowest poin
11.3.2	Seamless Stainless Steel Tube		
	(a) Reference	ASTM A-269 TP 316	
	(b) Material Grade	TP 316	
	(c) Size	¼" OD X 0.049" wall thickness.	
	(d) Type	Cold drawn annealed, pickled, passivated, de-scaled, ,hydraulically cleaned seamless tube.	
	(e) Properties	The tube shall be free from scratches and suitable for bending and capable of being flared by hardened and tapered steel pin. The expanded tube shall show no crack or rupture. Hardness shall be RB 80.	
	(f) Test Pressure	400 Kg/Sq. cm	

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume : V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 5
REV: R0	CONTROL & INSTRUMENTATION	Page 440 of 718
(g) Tolerance ± 0.13 mm for outside diameter ± 15 % for wall thickness (h) Standard Length 5 meter (i) Test Flare, Hardness, Ball and Bubble Test		
12.0	<u>SPECIAL TOOLS & TACKLE AND TEST EQUIPMENT FOR DCS/PLC AND OTHER SYSTEMS</u>	
12.1	Bidder shall supply a complete set of new, unused and reliable type of special tools and tackle and test equipment which are necessary or convenient for erection, commissioning, maintenance and overhaul of the plant and equipment provided under this specification.	
12.2	The tools & tackle and Test Equipment shall be shipped in separate container, clearly marked with names of the equipment for which they are intended.	
12.3	Bidder shall furnish list of tools & tackle and test equipment proposed to be supplied along with the bid.	

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 1
REV: R0	CONTROL & INSTRUMENTATION	Page 61 of 718

9.0 PROCESS CONNECTION & INSTRUMENT HOOK UP

9.1 Instrument connection to the process system (piping, vessel etc.) shall be according to the process & piping specification upto and including the root valves. Root valves shall be installed as close as possible to the piping or vessel. Each instrument shall have its own independent connection to the process except for instruments located on standpipe. Each instrument shall be connected independently to the standpipe through isolation valve.

9.2 Isolation and blowdown drain valves adequate for duty and capable of withstanding continuous design condition of main process shall be provided. Instrument blow down valve near to the instrument shall be of gradual opening type. For process pressure equal or above 40 kg/ sq.cm double blowdown valves shall be used connecting to blowdown header. Instrument manifold /gauge valve shall be installed close to the instrument.

9.3 The nominal size of the takeoff connections on line shall not be less than NPS ½" for source conditions not in excess of either 900 psi or 425°C and NPS ¾" (for adequate physical strength) for design conditions exceed either of these limits. Where the size of the main is smaller than the limits given above, the takeoff connections shall not be less than the size of the main line.

9.4 Process connection for instruments lines and vessels shall be in accordance to standards such as ASME or other recognized international standards. Table below indicates the type of connection generally to be used.

SR. NO.	INSTRUMENTS	EQUIPMENT/PIPE SIDE	INSTRUMENT SIDE
(a)	Level Instruments		
	(i) Internal Displacer	4" – Flanged.	4" – Flanged.
	(ii) External Displacer	2" – Flanged.	2" – Flanged.
	(iii) Level gauge	¾" – Flanged.	¾" – Flanged.

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 1
REV: R0	CONTROL & INSTRUMENTATION		Page 62 of 718
SR. NO.	INSTRUMENTS	EQUIPMENT/PIPE SIDE	INSTRUMENT SIDE
	(iv) DP Type	$\frac{1}{2}$ " (min.) - welded 1" – welded for vessel like HP heaters, LP heaters, De-aerator etc. application.	$\frac{1}{2}$ "- NPT.
	(v) External cage Level switch	1"- welded.	1"- welded.
(b)	Flow Instruments		
	(i) DP Type	$\frac{1}{2}$ " - welded in general. 1" – welded for high pressure/ temperature main steam, feed water, PRDS etc. application.	$\frac{1}{2}$ " – NPT.
(c)	Pressure Instruments		
	(i) Conventional	$\frac{1}{2}$ " (min.)-welded 1"- welded for high pressure/ temperature main steam, feed water, PRDS etc. application.	$\frac{1}{2}$ " – NPT.
	(ii) Diaphragm type-HFO application	3"- Flanged.	3"- Flanged.

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: V																				
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1		Section – 1																				
REV: R0	CONTROL & INSTRUMENTATION		Page 63 of 718																				
<table><tr><th>SR. NO.</th><th>INSTRUMENTS</th><th>EQUIPMENT/PIPE SIDE</th><th>INSTRUMENT SIDE</th></tr><tr><td>(d)</td><td>Temperature Instruments</td><td></td><td></td></tr><tr><td></td><td>(i) Thermowell</td><td>Generally - M 33 X2 (M). 1½" Flanged- For air /FG path application.</td><td>½" NPT.</td></tr><tr><td>(e)</td><td>Analyzer</td><td></td><td></td></tr><tr><td></td><td>(i) Liquid analyzer</td><td>½" - 1" – welded.</td><td>½".</td></tr></table>				SR. NO.	INSTRUMENTS	EQUIPMENT/PIPE SIDE	INSTRUMENT SIDE	(d)	Temperature Instruments				(i) Thermowell	Generally - M 33 X2 (M). 1½" Flanged- For air /FG path application.	½" NPT.	(e)	Analyzer				(i) Liquid analyzer	½" - 1" – welded.	½".
SR. NO.	INSTRUMENTS	EQUIPMENT/PIPE SIDE	INSTRUMENT SIDE																				
(d)	Temperature Instruments																						
	(i) Thermowell	Generally - M 33 X2 (M). 1½" Flanged- For air /FG path application.	½" NPT.																				
(e)	Analyzer																						
	(i) Liquid analyzer	½" - 1" – welded.	½".																				
9.5	Size of impulse pipe for pressure measurement in air and flue gas duct path of boiler shall not be less than ¾" NB.																						
9.6	Separate stubs and take-off points with thermo well/root valves shall be provided for performance guarantee test.																						
9.7	Impulse pipes shall be clamped at suitable interval not exceeding 1.5 meter. Process pipe shall not be used for supporting the impulse pipe.																						
9.8	Fittings shall conform to ANSI B 16.11. Threads of piping component shall be of tapered construction.																						
9.9	Instrument blow down header shall in no case be lower than the material grade ASTM A 106 Gr. C.																						
9.10	Impulse pipe shall be laid at least with slope of gradient 1:10 to avoid any air pocket or water accumulation.																						
9.11	Expansion loop shall be provided at least at every 2.5 meter interval without affecting the gradient of slope in long run impulse pipe to avoid stress on the piping.																						

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 64 of 718
9.12 Siphon shall be provided in the impulse pipe or tube to protect the instruments where fluid temperature is 100 °C or more. 9.13 Orientation of tapplings shall be as follows : (a) For liquid service within 45° at lower half of the pipe horizontal plane. (b) For gas service within 90° at upper half of the pipe horizontal plane. (c) For steam service within 45° at upper half of the pipe horizontal plane. As a rule tap orientation of high and low pressure side should be parallel and symmetrical. 9.14 Pressure & Differential pressure instruments in steam and liquid services shall be located below the taps and the piping shall be sloped to avoid formation of air pocket. 9.15 Pressure & Differential pressure instruments in air and flue gas service shall be located above the taps and the piping shall be sloped back to process to avoid formation of any liquid. 9.16 Impulse pipe including taps for furnace, flue gas and coal mill application shall be provided with air purge connection. Differential instruments for such application shall have continuous and as well as intermittent purging. Whereas, pressure measurement shall have only intermittent purging. 9.17 Material of impulse pipe for the instruments mounted on rack and enclosure shall be same as that of main process pipe except stainless steel tube of Gr. 316H or better shall be provided for connection in between impulse pipe (from tee connection on impulse pipe) and instrument manifold valve & instruments. Impulse pipe, tubes, fittings and accessories shall have the same design pressure and temperature applicable for the related main pipe.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 65 of 718
10.0	<u>POWER SUPPLY SYSTEMS</u> 10.1 Instrumentation power supply system shall include all conditioning equipment required to accommodate normal variations in the electrical supply. All panels and cabinets shall accept redundant power feeds from two different sources. 10.2 Type of power supply systems envisaged are as follows: (a) 240V AC UPS. (b) 24V DC battery system. The battery system shall be dual floating with each stream having its own float cum boost charger. Care shall be taken so that the control system is not damaged during boost charging and also that the cables are properly sized so that the voltage drop does not cause the terminal voltage at the consumer end to fall below the minimum recommended value.	
11.0	<u>ENVIRONMENTAL CONSIDERATIONS</u> 11.1 I&C components should operate properly with no degradation in expected lifetime or in operation parameter in the normal power plant environment. C&I system shall be designed considering all the operating conditions which may be encountered during installation and operation. 11.2 <u>TEMPERATURE</u> 11.2.1 Where the environmental extreme exceeds the capabilities of the selected system, Bidder should take appropriate steps to control the environment. 11.3 <u>HUMIDITY</u> I&C system shall be designed to withstand the humidity limits specified for the project. Condensation shall not be allowed to form in the cabinets nor should water be allowed to be admitted through conduit entering the cabinets from top or sides.	

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
CONTROL PANELS SPECIFICATION		

 MAHARASHTRA STATE POWER GENERATION CO. LTD.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 1
REV: R0	CONTROL & INSTRUMENTATION	Page 52 of 718
7.9.1 Elevated Temperature Test (a) During the first 48 hours the ambient temperature shall be maintained at 50^o C and the equipment shall be made to repeatedly perform operations it will be expected to perform in service with loads on various components being equal to those which will be experienced in actual service. (b) The 48 hours test period shall be continuous but shall be divided into four 12-hour segments. The power supply voltage during each 12 hours segment shall be nominal voltage for 11 hours; followed by 110 percent of nominal voltage for 30 minutes; followed by 90 percent of nominal voltage for 30 minutes. (c) During the elevated temperature test the cubicle doors shall be kept closed and inside temperature in the zone of highest heat dissipating component/ module shall be monitored. Temperature rise inside the cubicle should not exceed 10 Deg.C above the ambient temperature of 50 Deg.C. (d) Solid-state logic systems shall be subject to the elevated temperature test and burn-in test as complete assemblies. Testing of individual components or modules shall not be acceptable. 7.9.2 Burn in Test The 48 hours elevated temperature test shall be followed by 120 hours of burn in test at normal operating temperature. This test shall also be conducted as per above procedure. 7.10 <u>PANELS, CUBICLES AND ENCLOSURES</u> 7.10.1 General (a) All panels, cubicles and enclosures shall be furnished complete with integral piping, internal wiring, convenience outlets, internal lighting, grounding, ventilation, space heating, vibration isolating pads and other accessories.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 53 of 718
Unless otherwise specified cable entry for panels/desks/cabinets shall be through bottom via glanding plate. Fireproof seal shall be used to seal the bottom to prevent entry of dust. (b) Panels and cabinets shall be constructed from steel sheet reinforced as required to provide true surface and adequate support for devices mounted thereon. Thickness of the steel plate shall conform to the requirements of UL 50 or equivalent standard. Panels and cabinets shall be of adequate strength to support mounted components during shipment and to support a concentrated load of 100 Kilograms on their top after erection. (c) Panel/cabinet shall have eyebolt on top for lifting. 7.10.2 Surface Preparation and Painting Sheet metal exterior steel surfaces shall be sand blasted, ground smooth and painted as specified below: (a) Suitable filler shall be applied to all pits, blemishes and voids in the surface. The filler shall be sanded so that surfaces are level and flat; corners are smooth and even. Exposed raw metal edges shall be ground burr-free. The entire surface shall be blast clean to remove rust and scale. Oil, grease and salts etc. shall be removed from by one or more solvent cleaning methods prior to blasting. (b) Two spray coats of epoxy primer surface shall be applied to all exterior and interior surfaces, each coat of primer surface shall be of dry film thickness of 1.5 mil. A minimum of two spray coats of final finish colour (Catalyzed epoxy or polyurethane) shall be applied to all surface of dry film thickness 2.0 Mil. The finish colours for exterior and interior surfaces shall conform to the following shades: (i) Exterior – RAL 7032. (ii) Interior - Brilliant White.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 54 of 718
(c) Paint films, which show sags, cheeks, blisters, teardrops, fat edges or other painting imperfections shall not be acceptable. 7.10.3 Wiring Wiring within the panels shall conform to NEC standards and shall be factory installed and tested at the works. All interior wiring shall be installed neatly. Features shall not be limited to the following: (a) All spare contacts of relays, switches and push buttons shall be wired up to the terminal blocks. (b) Each wire shall be identified at both ends with wire designation as per approved wiring diagram. Heat shrinkable type ferrules with indelible computerized print shall be used with cross- identification. (c) Wire termination shall be made with insulated sleeve and crimping type lugs. All external connections shall be made with one wire per terminal. Wire shall not be spliced or tapped between terminals. Open-ended terminal lugs shall not be used. (d) Internal wiring should be terminated uniformly on one side of the terminal block leaving the other side available for termination of outgoing cables. (e) Thermocouple lead wires, analyzer measuring lead wires, or any other lead wires carrying measuring signal of the order of low milli volt or micro volt shall be electrically and physically isolated from other AC and DC wiring. (f) All low-level signal cables shall be separately bundled from control cable. (g) Wires shall be dressed and run in troughs with clamp-on type covers. Wirings shall be neatly bunched in groups by non-metallic cleats or bands. Each group shall be adequately supported along its run to prevent sagging or strain on termination. (h) Shield wires shall be terminated on separately.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 55 of 718
(i) Common connections shall be limited to two wires per terminal. (j) Wiring to door mounted devices shall be provided with multi-strand wires of (49 strands minimum) adequate loop lengths of hinge-wire so that multiple door openings will not cause fatigue to the conductor. (k) Wiring shall be arranged to enable instruments or devices to be removed and/or serviced without disturbing the wiring. No wire shall be routed across the face or rear of any device in a manner, which will impede the opening of covers or obstruct access to leads, terminals or devices. (l) Panel internal wiring shall follow distinct colour-coding to segregate different voltage levels viz. 24V DC, 48V, 110V AC, 240V AC, 220V DC etc. (m) Panels/cabinets /desks shall be provided with removable gasketted cable gland plates and cable glands. Split type grommets shall be used for prefab cables. (n) Wire shall be multistranded annealed flexible high purity copper conductor with heat resistant FRLS PVC insulation and shall pass vertical flame test per IPCEAS-1981. (o) Wire sizes used for internal wiring shall not be lower than the followings: (i) Control wiring : 1.5 Sq.mm (switches, pushbuttons etc.) (ii) Power supply/receptacle : 2.5 sq. mm or higher as /illumination wiring per load/ (iii) 4-20mA DC current : 0.5 Sq. mm and low voltage signal upto 24V DC		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 56 of 718
(p) Identification of conductors shall be done by insulation color-coding identified on drawings or by printed wiring lists. 7.10.4 Grounding (a) System cabinet AC and DC ground shall be electrically isolated from each other and also electrically isolated from the Instrumentation signal ground. All the above ground shall be individually connected to the single point on the ground pit. Dedicated redundant earth pit shall be provided which shall be away from the HV equipment. This earth pit shall not be shared with other electrical equipment ground and shall also be insulated from other electrical system ground to ensure single point grounding of the system. Grounding resistance shall be better than 1.0 ohm. IEEE guideline shall be followed while designing the grounding system. (b) Panels and cabinets shall be provided with a continuous tinned copper ground bus bar of minimum 25 mm x 6 mm cross section, extending along the entire length of the panel/desk/cabinet assembly. The ground bus shall be bolted to the panel structure and effectively ground the entire structure. (c) The panel/desk/enclosure /JB ground shall have two (2) bolt drilling with GI bolts and nuts at each end to connect to GI/ copper flat ground riser by means of insulated copper ground cable of required cross section with lug. (d) Circuits requiring grounding shall be individually and directly connected to the panel ground bus. (e) For electronic system cabinets, the electronic system ground bus shall be similar but insulated from the cabinet and shall be separately connected to the system ground. Signal cable shields shall be grounded at the panel end only and shall not be left open. The ground in between panels of a shipping section shall be firmly looped.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V																		
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I																		
REV: R0	CONTROL & INSTRUMENTATION	Page 57 of 718																		
(f) Electrical meters, relays, transmitters and switching devices, operating at a voltage less than 50V may be grounded through the steel structure. 7.10.5 Panel/Cabinet/ Desk/Enclosures Environmental Protections (a) Panels, cabinets, desks, distribution boxes, junction boxes, terminal boxes and all other field mounted equipment / enclosures shall suit the environmental condition of the area and shall not be inferior than the requirement indicated in the following table: <table border="1" data-bbox="434 797 1410 1619"> <thead> <tr> <th>SR. NO.</th><th>LOCATION</th><th>ENCLOSURE TYPE</th></tr> </thead> <tbody> <tr> <td>(i)</td><td>Indoor type non- ventilated enclosure in non-hazardous area</td><td>IP-54.</td></tr> <tr> <td>(ii)</td><td>Indoor type ventilated enclosure in non-hazardous area</td><td>IP -42.</td></tr> <tr> <td>(iii)</td><td>Enclosure in Air conditioned area</td><td>IP-22 with suitable canopy at top to prevent ingress of dripping water.</td></tr> <tr> <td>(iv)</td><td>Outdoor type in non-hazardous areas</td><td>IP-55.</td></tr> <tr> <td>(v)</td><td>Outdoor in hazardous areas</td><td>As per requirements of the NEC Code for the location.</td></tr> </tbody> </table> 7.10.6 Terminal Blocks (a) Terminals shall be chromated galvanized DIN rail mounted screw less cage clamp type. Terminals shall have screwed connection for conductor cross-section above 2.5 mm². Terminal blocks shall conform to IEC 947-7-1.			SR. NO.	LOCATION	ENCLOSURE TYPE	(i)	Indoor type non- ventilated enclosure in non-hazardous area	IP-54.	(ii)	Indoor type ventilated enclosure in non-hazardous area	IP -42.	(iii)	Enclosure in Air conditioned area	IP-22 with suitable canopy at top to prevent ingress of dripping water.	(iv)	Outdoor type in non-hazardous areas	IP-55.	(v)	Outdoor in hazardous areas	As per requirements of the NEC Code for the location.
SR. NO.	LOCATION	ENCLOSURE TYPE																		
(i)	Indoor type non- ventilated enclosure in non-hazardous area	IP-54.																		
(ii)	Indoor type ventilated enclosure in non-hazardous area	IP -42.																		
(iii)	Enclosure in Air conditioned area	IP-22 with suitable canopy at top to prevent ingress of dripping water.																		
(iv)	Outdoor type in non-hazardous areas	IP-55.																		
(v)	Outdoor in hazardous areas	As per requirements of the NEC Code for the location.																		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 1
REV: R0	CONTROL & INSTRUMENTATION	Page 58 of 718
(b) The characteristics of the terminal blocks shall be as follows: (i) High contact force, independent of conductor cross-section and large contact surface area. (ii) Self-loosening protection. (iii) Resistant to thermal aging and vibration. (iv) Low and constant voltage drop. (c) Tension spring shall be made of high quality, non-rusting, acid-resistant steel. The current bar shall be of tin-lead plated copper or brass. (d) Terminals shall be of non flammable suitable thermoplastic material such as polyamide. (e) Terminal blocks shall be mounted vertically in panels and cubicles with clearance for at least 100 mm between two sets and between wall and terminal block. (f) Terminal blocks shall be provided with white marking strips/self-adhesive marker cards. Power terminals shall have protection covers. (g) At least 20 percent spare unwired terminals shall be provided for all panels/cabinets /desks /junction box etc. This shall be in addition to 20% spare wired terminals of spare IO channels and 10% wired spare modules. (h) Bottom of the terminal block shall be at least 200 mm above the cable gland plate for bottom entry type panels. (i) For extending 24 V DC supply to panels, the size of the terminals shall be decided based on voltage drop and not based on current. (j) Other requirements of the terminal blocks are as follows:		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 59 of 718
(i) The last block in a rail-mounted assembly shall be closed with an end plate and end bracket. (ii) For visual and electrical separation of terminal groups, partition plates shall be provided, which can be push fitted after forming an assembly. (iii) Design shall permit testing of incoming and outgoing signals by using suitable test plug and socket without disconnecting the cable connections. (iv) It shall be possible to use jumper plugs through the test plug socket to connect adjacent terminals. (v) Where more than one connection to a terminal block is required, two tier terminals shall be used. (vi) Terminal blocks shall be of different colours depending on voltage levels. 7.10.7 Nameplates and Labels (a) Each item shall have permanently attached to it, in a prominent position, a rating plate of non-corrosive material upon which is to be engraved the manufacturer's name, equipment, type/model number, range, serial number, together with details of the loading conditions under which the item of plant in question has been designed to operate. (b) Such nameplates or labels are to be of white non-hygroscopic material with engraved black lettering, or alternatively of transparent plastic material with suitably colour lettering engraved on the back. (c) The nameplates shall be held by self-tapping screws. The size of nameplate shall be approximately 20 mm x 75 mm for equipment and 40 mm x 150 mm for the panels.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V																																							
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 1																																							
REV: R0	CONTROL & INSTRUMENTATION	Page 60 of 718																																							
(d) Items of plant such as valves, which are subject to handling, are to be provided with an engraved chromium plated nameplate or label with engraving filled with enamel, suitably mounted or affixed with strong rustproof chain (e) All such nameplates, instruction plates, lubrication charts etc. shall be with English inscriptions. exemption 8.0 <u>METERING BASES AND CHART UNITS</u> The following system of units shall be followed for various displays and scales unless otherwise mentioned: <table border="0"> <tr> <td>(a) Pressure</td><td>:</td><td>Kg/cm².</td></tr> <tr> <td>(b) Differential Pressure</td><td>:</td><td>mm of H₂O column/Kg/cm².</td></tr> <tr> <td>(c) Draught</td><td>:</td><td>mm of H₂O column.</td></tr> <tr> <td>(d) Vacuum</td><td>:</td><td>Kg/cm² (abs)/mm of Hg column.</td></tr> <tr> <td>(e) Temperature</td><td>:</td><td>Degree Celsius (°C).</td></tr> <tr> <td>(f) Flow (Steam, Water)</td><td>:</td><td>Tonnes/hr, M³/Hr.</td></tr> <tr> <td>(g) Flow (Oil)</td><td>:</td><td>M³/Hr, Litter/Hr.</td></tr> <tr> <td>(h) Flow Air</td><td>:</td><td>Tonnes/hr/M³/Hr.</td></tr> <tr> <td>(i) Density</td><td>:</td><td>gms/c.c.</td></tr> <tr> <td>(j) Level</td><td>:</td><td>mm/%.</td></tr> <tr> <td>(k) Conductivity</td><td>:</td><td>Siemens/cm.</td></tr> <tr> <td>(l) Gas Analyzer</td><td>:</td><td>Percentage by weight or as specified in respective case.</td></tr> <tr> <td>(m) Dissolved Oxygen/Silica /Sodium</td><td>:</td><td>ppm /ppb.</td></tr> </table>			(a) Pressure	:	Kg/cm ² .	(b) Differential Pressure	:	mm of H ₂ O column/Kg/cm ² .	(c) Draught	:	mm of H ₂ O column.	(d) Vacuum	:	Kg/cm ² (abs)/mm of Hg column.	(e) Temperature	:	Degree Celsius (°C).	(f) Flow (Steam, Water)	:	Tonnes/hr, M ³ /Hr.	(g) Flow (Oil)	:	M ³ /Hr, Litter/Hr.	(h) Flow Air	:	Tonnes/hr/M ³ /Hr.	(i) Density	:	gms/c.c.	(j) Level	:	mm/%.	(k) Conductivity	:	Siemens/cm.	(l) Gas Analyzer	:	Percentage by weight or as specified in respective case.	(m) Dissolved Oxygen/Silica /Sodium	:	ppm /ppb.
(a) Pressure	:	Kg/cm ² .																																							
(b) Differential Pressure	:	mm of H ₂ O column/Kg/cm ² .																																							
(c) Draught	:	mm of H ₂ O column.																																							
(d) Vacuum	:	Kg/cm ² (abs)/mm of Hg column.																																							
(e) Temperature	:	Degree Celsius (°C).																																							
(f) Flow (Steam, Water)	:	Tonnes/hr, M ³ /Hr.																																							
(g) Flow (Oil)	:	M ³ /Hr, Litter/Hr.																																							
(h) Flow Air	:	Tonnes/hr/M ³ /Hr.																																							
(i) Density	:	gms/c.c.																																							
(j) Level	:	mm/%.																																							
(k) Conductivity	:	Siemens/cm.																																							
(l) Gas Analyzer	:	Percentage by weight or as specified in respective case.																																							
(m) Dissolved Oxygen/Silica /Sodium	:	ppm /ppb.																																							



SPECIFICATION FOR LOCAL PANELS

SPECIFICATION NO.: PE-SS -999- 145 -054A

VOLUME II B

SECTION D

REV. NO. 03

DATE : 16-09-2013

SHEET 1 OF 6

1.0 SCOPE

This specification covers the Design, Manufacture, Inspection and Testing at the manufacturer's works, proper packing for transportation and delivery to site, supervision, erection, and commissioning at site of Local Panels required for control and monitoring of the Auxiliary Plant & Equipment.

2.0 CODES AND STANDARDS

2.1 All the equipments specified herein shall comply with the requirements of the latest issue of the relevant National and International standards.

2.2 As a minimum requirement, the following standards shall be complied with:

- | | | |
|----|--------------------------|---|
| a) | IS-6005 : 1998 | : Code of practice for phosphating of iron and steel. |
| b) | IS-5 : 2007 | : Colors for ready mixed paints and enamels. |
| c) | IS-1248:2003 | : Direct Acting Indicating Analog Elec Measuring Instruments. |
| d) | IS/IEC 60947:Part 1:2004 | : Low Voltage switchgear & control gear: Part-I (General Rules) |
| e) | IS-8828:1996 | : Circuit breaker for household and similar installations. |
| f) | IS-13947 (Part-I):1993 | : Low Voltage switchgear & control gear : Part-I (General Rules) |
| g) | ISA-18.1:1979 | : Annunciator Sequences and Specification |
| h) | NFPA-496:2003 | : Purged & Pressurised Enclosure for Electrical Equipment in Hazardous Locations. |

3.0 TECHNICAL REQUIREMENTS

3.1 Panel Construction

3.1.1 The local panels shall house the secondary instruments, annunciation system, Single loop controller, Control switches / push buttons, indicating lamps/LED cluster, relays, timers and other devices required for operation and monitoring of the equipment locally.

3.1.2 The panels shall be of free standing type either welded construction on angle iron (minimum section of 50 x 50 x 4 mm) structure or folded construction by sheet metal formation depending upon the equipments to be mounted on it. The panels shall be robustly built and stiffeners as necessary shall be provided.

3.1.3 The panel shall be suitably reinforced to ensure adequate support for all instruments mounted thereon. All welds on exposed panel surfaces shall be ground smooth.

3.1.4 The salient features of construction shall be:

Sheet material: Cold rolled sheet steel

Frame thickness: Not less than 3.0mm

Enclosure thickness: Not less than 3.0 mm for load bearing sections (Mounted with instruments)
2.0 mm for doors and Not less than 2.0 mm for others

Panel Height: Not less than 2365 mm (Refer data sheet-A (No. PES-145A-DS1-0)

Gland plate thickness: 3.0mm

Base channel: ISMC 100 with anti-vibration mounting & foundation bolts.

3.1.5 The panel shall be provided with rear doors with integral lockable handle. The door when locked shall be held at minimum three places. The door width shall not be more than 550mm. The doors shall be provided with suitable stiffeners to prevent buckling. The handle shall be on the right side of the door. The door shall be removable type with concealed hinges to facilitate maintenance work. Suitable pocket inside the door shall be provided for keeping the drawings / documents. Double door shall be provided with suitable glass windows, as per the requirement.

3.1.6 Suitable neoprene gasket shall be provided on all doors and removable covers. Suitable ventilation system along with louvers shall be provided at bottom and top of the doors covered with removable wire mesh.



SPECIFICATION FOR LOCAL PANELS

SPECIFICATION NO.: PE-SS -999- 145 -054A	
VOLUME	II B
SECTION	D
REV. NO. 03	DATE : 16-09-2013
SHEET	2 OF 6

- 3.1.7 The class of protection shall be in accordance with IP-55 unless otherwise specified in the data sheet – A (No. PES-145-54A-DS1-0).
- 3.1.8 All steel surfaces shall be cleaned by sand / pellet blasting, treated for pickling, degreasing and phosphating etc. by seven tank method. The panel shall have a high quality finish and appearance. The panel shall be painted with two coats of primer followed by two coats of epoxy / synthetic enamel based final paint of color shade and finish as given in data sheet-A (No. PES-145A-DS1-0). Minimum thickness of the paint shall be 85 microns for external paint and 70 microns for internal paint.
- 3.1.9 The cable glands of the required size and type as given in data sheet-A (No. PES-145A-DS1-0) shall be supplied alongwith the Panel.
- 3.1.10 All operable and indicating devices shall be mounted on the front of the panel while aux. Relays / timers MCBs etc. required for realization of control logics shall be mounted on a mounting plate inside the panel. Auxiliary relays and timers etc. shall be grouped according to the control function.
No operable or indicating devices shall be mounted below 750 mm and above 1800 mm (w.r.t. finished ground level). The devices shall be located in such a way so as to ensure easy access for operation / maintenance.
- 3.1.11 Single / dual control power supply feeders of voltage class as specified in data sheet-A (No. PES-145A-DS1-0) shall be provided by the purchaser. In case redundant power supply feeders are provided then auto changeover unit shall be mounted on the panel are in the panel supplier's scope. Where DC control power supply is specified an additional 240V, 50 Hz AC supply feeder for powering of space heater and lighting shall be provided by the purchaser. Suitable arrangement shall be provided inside the panel to receive and terminate the power supply feeder(s). For this purpose MCBs of suitable current rating shall be provided by the vendor. A supervisory relay along with a pilot lamp to indicate control supply 'ON' shall be provided on the panel. Any other power supply required for the operation of the devices mounted in the panel shall be arranged by the vendor.
- 3.1.12 The internal wiring shall be carried out with 1100 volt grade PVC insulated copper multi strand wire / flexible of 1.5mm² size. AC & DC wires shall be kept separate from each other. Separate coloured wires to be used for AC and DC circuits. All wires shall be properly numbered and identified with ferrules as per the Control scheme / wiring diagram. Wires shall be routed and run through PVC troughs.
- 3.1.13 Terminal blocks shall be clip on type, 1100 volts grade. Separate terminal blocks shall be used for AC & DC circuits. The terminals shall be suitable for terminating 0.5 mm² to 2.5mm² external cables. The TB points in terminal block shall be cage clamp type / screw type. The terminal for ammeters shall be provided with removable links for shorting CTs. Each terminal strip shall be provided with identification strip. The terminal shall not be mounted below 250 mm height from finished floor. The panel shall have ten (20) percent spare terminal.
- 3.1.14 The interior of each panel shall be suitably illuminated through fluorescent lamps / tube lights with shrouded cover of minimum 15W operable on 240V 50 Hz AC power supply through panel door switch. A 15 Amp. 3-pin Power receptacle shall be provided.
- 3.1.15 Suitable space heaters operable on 240 Volts 50 Hz AC power system shall be provided at the panel bottom. These shall be designed to maintain the panel temperature five (5) deg. C above the ambient temperature during maintenance shutdown. Suitable isolating and control devices comprising of MCB, thermostat etc. shall be provided for the space heater.
- 3.1.16 The panel shall be provided with a copper earth bus of 25 x 6 mm size running throughout the width of the panel. It shall be terminated internally with 10 mm bolts at extreme ends for connection to; main station earth. The panel mounted equipments / devices shall be connected to earth bus through green coloured PVC insulated stranded copper conductor of 2.5 mm² size.
- 3.1.17 Local Panel shall be provided with main name plate of 150 mm x 40 mm size having inscription of 20 mm height. The individual devices on the panels shall be as provided with separate name plate with inscription of 3 mm height. The instrument / devices shall be provided with stick on label plates inside the panel. The material of the main and individual labels shall be three (3) ply 3 mm thick Traffolyte



SPECIFICATION FOR LOCAL PANELS

SPECIFICATION NO.: PE-SS -999- 145 -054A	
VOLUME	II B
SECTION	D
REV. NO. 03	DATE : 16-09-2013
SHEET	3 OF 6

Sheet / 2 mm Anodised Aluminium Plate. The inscription shall be with white letters on black background on traffolyte sheet. The labels shall be fixed by self tapping non-rusting screws.

- 3.1.18 Vendor shall furnish electric load and heat load list (in case panel is to be placed in ac environment) of each panel.

3.2 Hazardous Area Panel Requirement

- 3.2.1 The Local Panel located in hazardous area shall be pressurized as per NFPA-496 requirements to render it non-hazardous. Alarms shall be provided for local and remote annunciation when pressurisation falls below 2.5 mm of water column. Protection shall be of type Z of NFPA-496. It shall not be possible to switch ON the power of purged section unless it is purged as per the recommendation of NFPA-496. Vendor must provide a protective device on the panel to protect the panel from over pressurisation.

- 3.2.2 Vendor shall supply pressurisation kit consisting of valves, restriction orifices, dual filter regulation, pressure gauges, pressure switches, rotameter etc. Pressurisation kit shall be surface mounting on a metal board and located outside the local panel. Pressurisation kit shall further consist of solenoid valve flow switch, timer blow off safety device etc., so as to make purging fully automatic. However final start shall be manual. Panel protection against over pressure to be provided as per NFPA-496.

- 3.2.3 Pressurised local control panel pressurization kit assembly design shall provide minimum leakage flow through the Local Control Panel. Panel venting shall be as per NFPA-496.

- 3.2.4 All components in the local panel like indicating instruments, push buttons switches, lamps etc., which are required to be energized without panel pressurization or before completion of purge cycle shall be explosion proof as per NEMA-7 & suitable for area classification.

- 3.2.5 All push buttons etc. requiring frequent operation during machine running shall have good positive sealing. Weatherproof housing or cover to be provided wherever necessary. Vendor shall provide pressurisation bypass switch outside explosion proof enclosure of pressurized panel with lamp indication. This shall be used only during maintenance. All hinges, screws, other non-painted metallic parts shall be of stainless steel material.

- 3.2.6 Provision to switch off manually all types of power shall be provided in the panel. In addition, it shall also be possible to switch off power circuits / components which are powered from motor control centre or control room manually in case of pressurization failure. All such cables from MCC and main control room shall be terminated in explosion proof boxes (NEMA-7).

3.3 Control & Monitoring devices

- 3.3.1 Instruments like Indicators, recorders, single loop controllers etc. as applicable and specified elsewhere for the plant / equipment shall be supplied and mounted on the panel.

3.3.2 Alarm Annunciator System

It shall be solid state discrete facia type having a sequence of ISA-S18.1A or as specified, opaque facia windows of 70 mm x 50 mm size, having two (2) lamps per window, and hooter of 10W, and provision for repeat group alarm at remote. The annunciator shall be provided with ten (10) percent spare windows or minimum two (2) windows along with electronics.

3.3.3 Relays

The relays shall be electromagnetic type suitable for specified control supply. Its contact configuration and rating shall be suitable for the specified control function. However minimum contact rating shall be 5 Amp AC & 2 Amp DC as applicable. There shall be ten (10) percent spare contacts.

3.3.4 Timers

The timers shall be electronic type suitable for specified control supply. Its contact configuration and rating shall be suitable for the specified control function. However, minimum contact rating shall be 5 Amp AC & 2 Amp DC as applicable.



SPECIFICATION FOR LOCAL PANELS

SPECIFICATION NO.: PE-SS -999- 145 -054A

VOLUME II B

SECTION D

REV. NO. 03

DATE : 16-09-2013

SHEET 4 OF 6

3.3.5 Control / Selector Switches

Switches shall be Rotary Cam type with minimum of 5 Amps AC & 2 Amp DC continuous current rating. Selector switches shall be stay put type while control switches shall be spring-return-to-neutral type. Contact configuration and rating shall be as per the control function requirement. The switches shall be lockable type wherever specified. Each switch shall be provided with engraved plates indicating the switch position / functions.

3.3.6 Push Buttons / Indicating Lights

The push buttons shall be momentary action self-resetting type, however stop P.B. for unidirectional drives shall be provided with manual reset facility. Its contact configuration & rating shall be as required for the control function but minimum 2 NO + 2 NC of 5 Amp. AC rating. It shall have round coloured projecting tab and engraved escutcheon plate / inscription plate. Colour coding of push buttons shall be as under:

RED	Motor OFF / Valve CLOSE	YELLOW	Alarm acknowledge	Left Hand Side
GREEN	Motor ON / Valve OPEN	BLACK	Lamp test	Right Hand Side

Indicating lights shall be suitable for direct connections across specified power supplies. It shall be fitted with built in resistance to prevent circuit tripping on shorting of lamp filament. It shall be fitted with LED cluster type lamp replaceable from front.

GREEN	Motor OFF / Valve CLOSED condition	AMBER	Motor tripped	Left Hand Side
RED	Motor ON / Valve OPEN condition	WHITE	Normal / healthy	Right Hand Side

3.3.7 Ammeters

Ammeter shall be 96 x 96 mm size, 90 deg. deflection, 1.5% accuracy, 1 Amp. CT operated or with 4-20mA input and Flush mounting type as called for in the data sheet-A (No. PES-145-54A-DS1-0). Ammeters for motors shall have six (6) times folded scale at upper end to enable motor starting current indication

3.3.8 Miniature Circuit Breaker (MCB)

These shall be instantaneous magnetic trip type for short circuit in addition to current time inverse delayed thermal trip feature for over current protection. The housing of MCB shall be made of non-ignitable, high impact material. It shall have minimum short circuit rating of 9 KA for AC Voltages and 4 KA for DC Voltages.

3.3.9 Makes of various instruments / devices shall be as given below

1.	Alarm Annunciators	:	Procon / IIC
2.	Ammeters	:	AEP / IMP
3.	Control / Selector Switches	:	Alsthom / Kaycee / Siemens / L&T
4.	Push Buttons / Indicating Lamps	:	Siemens / L&T / Teknic / Alsthom
5.	Auxiliary Relays	:	Jyoti / Siemens / L&T / OEN
6.	Timers	:	L&T / Alsthom / Bhartiya Cutler Hammer
7.	MCBs	:	S&S Power Engg. / Indo Asian / MDS
8.	Terminal Blocks	:	Jyoti / Elmex

4.0 TESTING AND INSPECTION

4.1 The bidder shall adopt suitable quality assurance program to ensure that the equipments offered will meet the specification requirements in full.

4.2 BHEL's standard Quality Plan for LCP is enclosed with the specification. The bidder shall furnish his acceptance to BHEL's QP and submit the signed and stamped copy of QP along with the offer.



SPECIFICATION FOR LOCAL PANELS

SPECIFICATION NO.: PE-SS -999- 145 -054A

VOLUME II B

SECTION D

REV. NO. 03

DATE : 16-09-2013

SHEET 5 OF 6

4.3 The vendor shall conduct the following tests as a minimum requirement:

4.3.1 Routine Tests

1. High Voltage (H.V.)
2. Insulation Resistance (I.R.)
3. Functional

4.3.2 Type Tests

1. Enclosure Class Test

5.0 SPARES AND CONSUMABLES

5.1 Commissioning Spares and consumables

The bidder shall supply all commissioning spares and consumables 'as required' during Start-up, as part of the main equipment supply.

5.2. Mandatory Spares

The bidder shall offer alongwith main offer, the Mandatory Spares as specified elsewhere in the specification. The Mandatory Spares offered shall be of the same make and type as the main equipment.

5.3. Recommended Spares

The bidder shall furnish a list of Recommended Spares indicating the normal service expectancy period and frequency of replacement; quantities recommended for 3 years operation alongwith unit rate against each item to enable BHEL/BHEL's Customer to place a separate order later, if required.

6.0 DRAWINGS AND DOCUMENTS

6.1 The bidder shall furnish the following documents in required number of copies along with the bid :

1. Data Sheet no. PES-145A-DS1-0
2. General Arrangement Drawing.
3. Catalogue and technical information for instruments and devices.
4. Quality Plan.

6.2 The vendor shall furnish the following documents in required number as agreed after the award of contract:

1. Data Shee No. PES-145A-DS2-0
2. GA Drawing indicating layout of instruments, construction details, foundation details, cable gland plate alongwith cable glands and all details mentioned in this specification.
3. Control Schematic Diagram along with grouping of different terminals for various functions.
4. Catalogue and technical information for instruments and devices with selected options clearly marked.
5. O&M Manuals.
6. "As Built" Drawing.
7. CDs.

7.0 MARKING AND PACKING

7.1 Panel with all instruments / devices mounted on it shall be suitably packed & protected for the entire period of despatch, storage and erection against impact, abrasion, corrosion, incidental damage due



SPECIFICATION FOR LOCAL PANELS

SPECIFICATION NO.: PE-SS -999- 145 -054A

VOLUME II B

SECTION D

REV. NO. 03

DATE : 16-09-2013

SHEET 6 OF 6

to vermin, sunlight, high temperature, rain moisture, humidity, dust, sea-water spray (where applicable) as well as rough handling and delays in Transit and storage in open.

8.0 APPLICABLE DATA SHEET FORMS

This document shall be read with one or more of the following data sheet forms :

- Data sheet A&B for Local Panels : Data sheet no. PES-145A-DS1-0
- Data sheet C for Local Panels : Data sheet no. PES-145A-DS2-0



DATA SHEET FOR LOCAL PANELS

SPECIFICATION NO.: PES-145-054A

VOLUME

SECTION

REV. NO. 01

DATE: 24.01.2019

SHEET 1 OF 2

TAG No. Qty.....

Data Sheet No.: PES-145A-DS1-0

Data Sheet A & B

DATA SHEET-A FOR LOCAL PANEL
(TO BE FILLED BY PURCHASER)

DATA SHEET-B
(TO BE FILLED-UP BY
BIDDER)

GENERAL	MANUFACTURER		
	CONSTRUCTION		☐ FOLDED ☐ WELDED (As per requirement EDN)
	ENCLOSURE SHEET THICKNESS	FRONT	☒ 3.0 mm (FOR FACES SUPPORTING INSTRUMENTS/TERMINALS)
		OTHER	☒ 2.0 mm (FOR OTHER SIDES AND TOP)
		DOOR	☒ 2.0 mm
		HEIGHT	☐ 2365 mm for stand alone panels. (THIS SHALL BE DECIDED BY BHEL DURING DETAILED ENGG.)
	OTHER	☐	
TECHNICAL	INPUT POWER SUPPLY *		☐ 240V 50 Hz AC ☐ 220V DC ☐ 415V 3 PHASE 3W ☐ 415V 3 PHASE 4W
	NO. OF FEEDERS		☐ ONE ☒ TWO
	CONTROL SUPPLY		☐ 110V AC ☐ 220V AC ☐ 220V DC ☐ Other. (As per requirement)
	ALARM ANNUNCIATOR WINDOW (EXCLUDING SPARES)		_____ NOS. (AS REQUIRED)
	PAINT TYPE		☐ EPOXY ENAMEL ☒ EPOXY POWDER COATED OR BETTER (THIS SHALL BE DECIDED BY BHEL DURING DETAILED ENGG.)
	PANEL COLOUR (EXTERNAL)		☐ LIGHT GREY (Shade 631 IS-5) ☐ OPALINE GREEN (Shade 275) . ☒ RAL 7032 (THIS SHALL BE DECIDED BY BHEL DURING DETAILED ENGG.)
	FINISH (EXTERNAL)		☐ MATT ☐ GLOSSY ☐ SEMI GLOSSY
	PANEL COLOUR (INTERNAL)		☐ WHITE ☐ CREAM ☐ OFF WHITE ☒ BRILLIANT WHITE
	FINISH (INTERNAL)		☐ MATT ☐ GLOSSY ☐ SEMI GLOSSY
	CLASS OF PROTECTION		☐ IP-42 (FOR INDOOR SERVICE) ☒ IP-55 (FOR OUTDOOR SERVICE) ☐ ANY OTHER
	CONTROL HARDWARE		☒ RELAY BASED
	FOUNDATION ARRANGEMENT		☐ FOUNDATION BOLTS ☐ ANCHOR FASTENERS
	WEIGHT OF PANEL (Kg.)		
	PANEL TYPE		☐ PRESSURISED ☐ UNPRESSURISED As per Requirement
	CABLE GLAND		☐ DOUBLE COMPRESSION
AMMETER (TYPE OF INPUT) *		☐ 1 Amp CT ☐ 4-20 mA	

	DATA SHEET FOR LOCAL PANELS			SPECIFICATION NO.: PES-145-054A		
				VOLUME		
				SECTION		
				REV. NO.	01	DATE: 24.01.2019
				SHEET	2	OF 2
TAG No. Qty.....			Data Sheet No.: PES-145A-DS1-0			
Data Sheet A & B						
DATA SHEET-A FOR LOCAL PANEL (TO BE FILLED BY PURCHASER)				DATA SHEET-B (TO BE FILLED-UP BY BIDDER)		
* TO BE CO-ORDINATED WITH PEM ELECTRICAL						
NAME SIGNATURE DATE	PREPARED BY	CHECKED BY	APPROVED BY	COMPANY SEAL NAME: SIGNATURE: DATE:		



DATA SHEET FOR LOCAL PANELS

SPECIFICATION NO.: PES-145-054A

VOLUME

SECTION

REV. NO. 01

DATE: 22.03.2011

SHEET 2 OF 2

TAG No. Qty.....

Data Sheet No.: PES-145A-DS1-0


Data Sheet C

DATA SHEET-C FOR LOCAL PANEL
(TO BE FILLED BY CONTRACTOR AFTER AWARD OF CONTRACT)

GENERAL	MANUFACTURER			
	CONSTRUCTION		☐ FOLDED ☐ WELDED (As per requirement EDN)	
	ENCLOSURE SHEET THICKNESS	FRONT		
		OTHER		
		DOOR		
		HEIGHT		
	OTHER			
TECHNICAL	INPUT POWER SUPPLY			
	NO. OF FEEDERS			
	CONTROL SUPPLY			
	ALARM ANNUNCIATOR WINDOW (EXCLUDING SPARES)			
	PAINT TYPE			
	PANEL COLOUR (EXTERNAL)			
	FINISH (EXTERNAL)			
	PANEL COLOUR (INTERNAL)			
	FINISH (INTERNAL)			
	CLASS OF PROTECTION			
	CONTROL HARDWARE			
	FOUNDATION ARRANGEMENT			
	WEIGHT OF PANEL (Kg.)			
	PANEL TYPE			
	CABLE GLAND			
	AMMETER (TYPE OF INPUT)			
NAME SIGNATURE DATE	PREPARED BY	CHECKED BY	APPROVED BY	COMPANY SEAL NAME: SIGNATURE: DATE:
	Shiv Kumar	Anisha B Singhal	Anisha B Singhal	

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
DRIVE CONTROL PHILOSOPHY		

DCS INTERFACE FOR BIDIRECTIONAL DRIVE(WITH INTEGRAL STARTER)

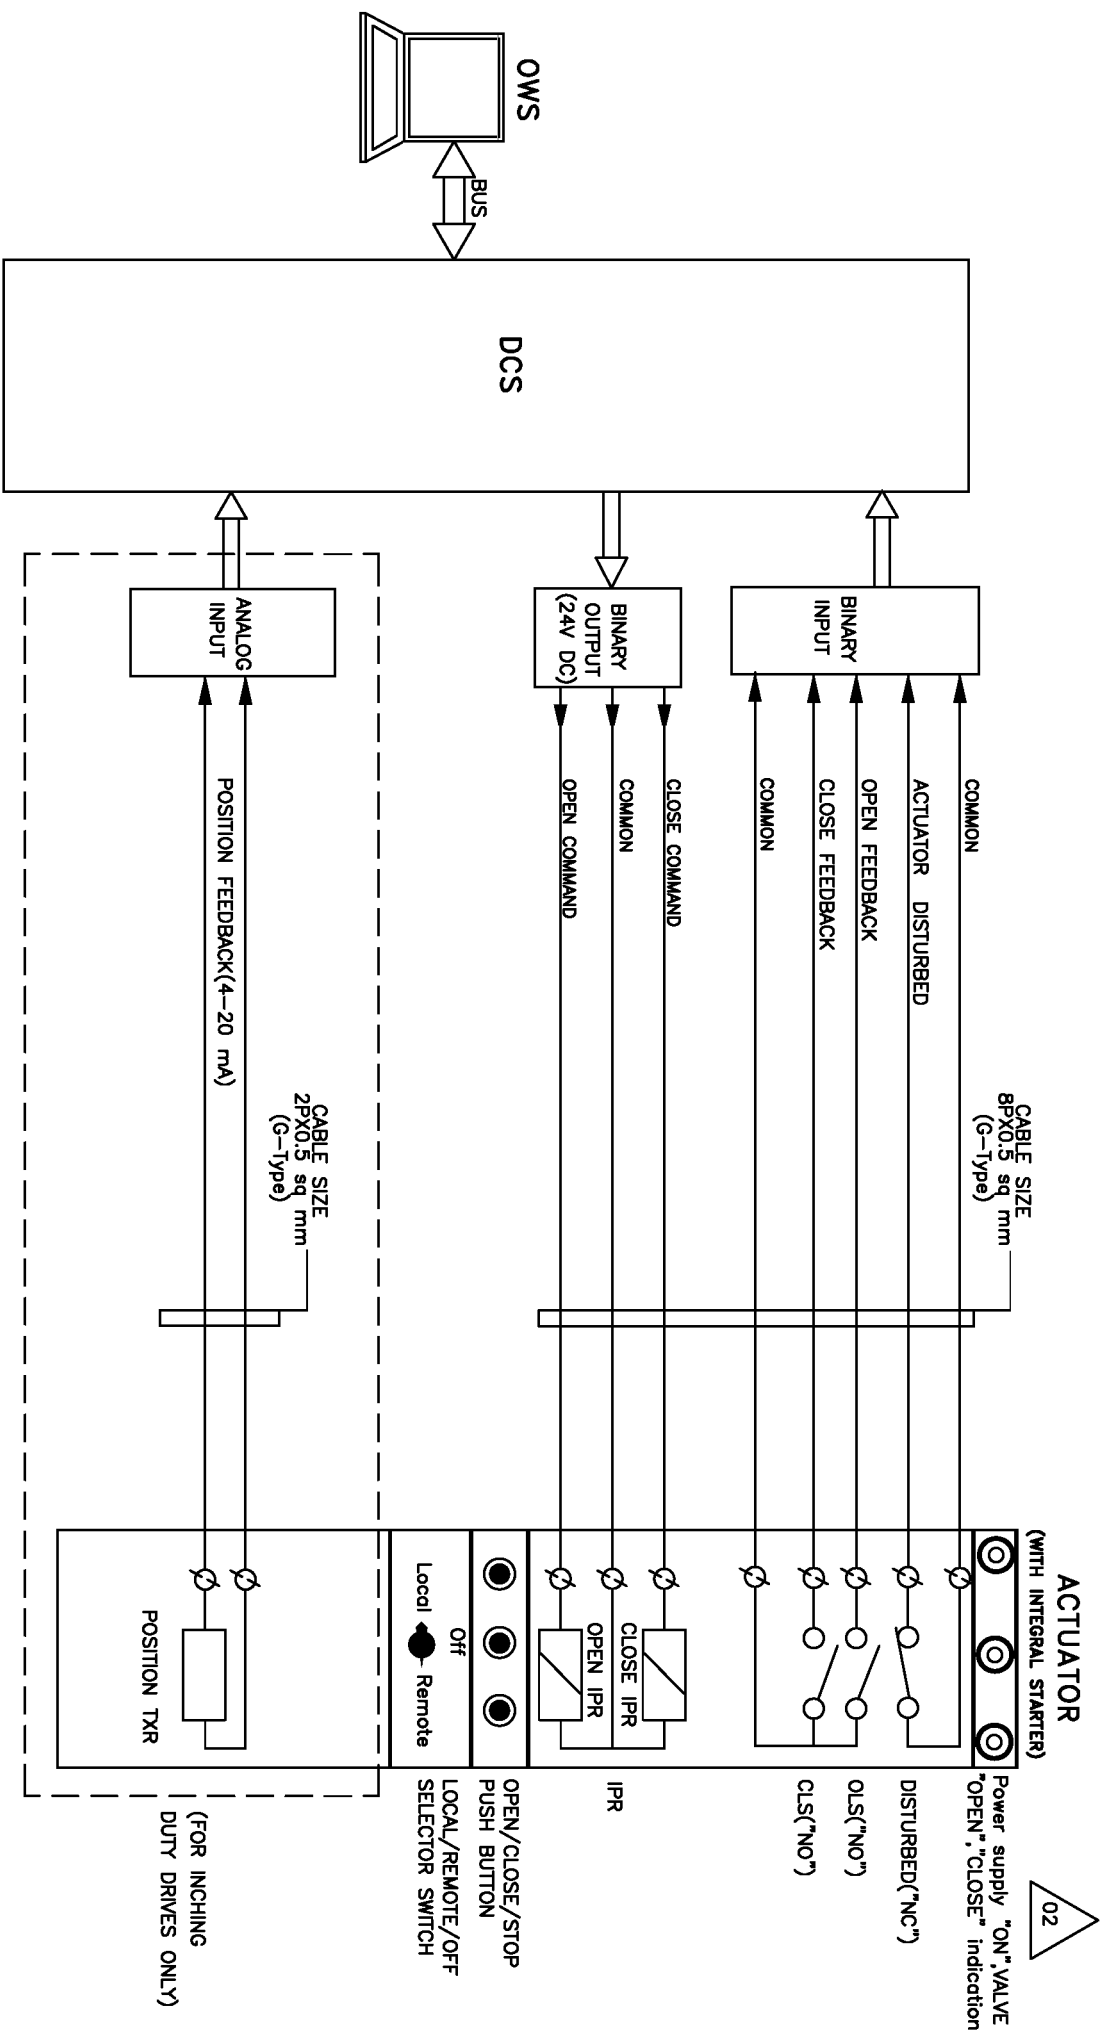

NOTE:

1. DISTURBED= Loss of Power supply (1 Phase/3 Phase),
Loss of control supply, Motor thermostat trip,
Thermal over load relay trip, Valve jammed,
Torque open/close cut off, Local/Off/Remote Sel. switch
in local or off mode etc.



PROJECT:

1x660 MW BHUSAWAL STPP

TITLE

DDCMS INTERFACE FOR
BIDIRECTIONAL DRIVE

DRG.NO.

PE-DM-415-145-1002

DATE

01.10.2018

REV.NO.

04


SHT

8

OF

12

DCS INTERFACE FOR UNIDIRECTIONAL LT DRIVE(CONTACTOR OPERATED)

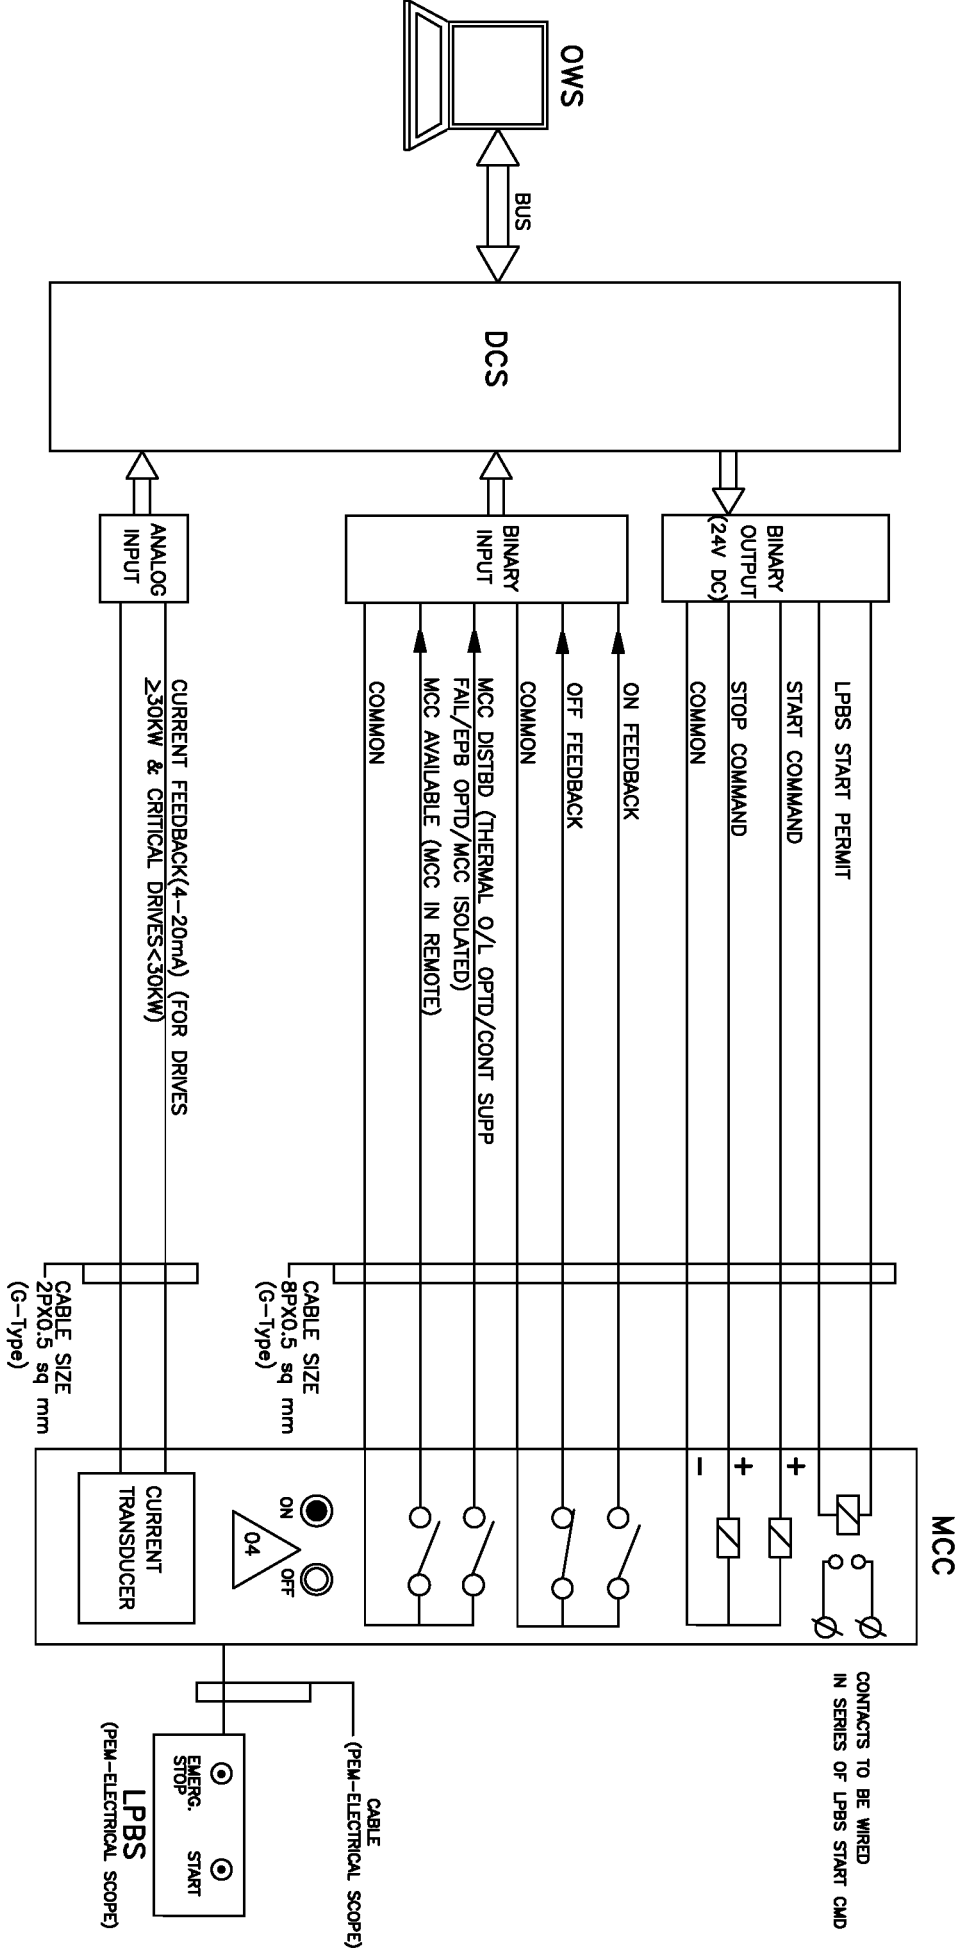

NOTE: INTERPOSING RELAYS(IPRS) TO BE SUPPLIED ALONG WITH MCC.



PROJECT:

1x660 MW BHUSAWAL STPP

TITLE

DDCMIS INTERFACE FOR
UNIDIRECTIONAL LT DRIVE

DRG.NO. PE-DM-415-145-1002


DATE 01.10.2018

REV.NO. 04

SHT 9 OF 12



DCS INTERFACE FOR SOLENOID DRIVE (24V DC / 240V AC UPS)

- NOTES:
- * TWO INDEPENDENT OUTPUTS FROM CONTROL SYSTEM SHALL BE PROVIDED TO PUSH-PULL TYPE VALVES, WITH DUAL COIL SOLENOIDS.
 - ** MCB SHALL BE PROVIDED FOR EACH SOLENOID
 - # FOR ON/OFF TYPE, SOLENOID ACTUATED CONTROL VALVE.

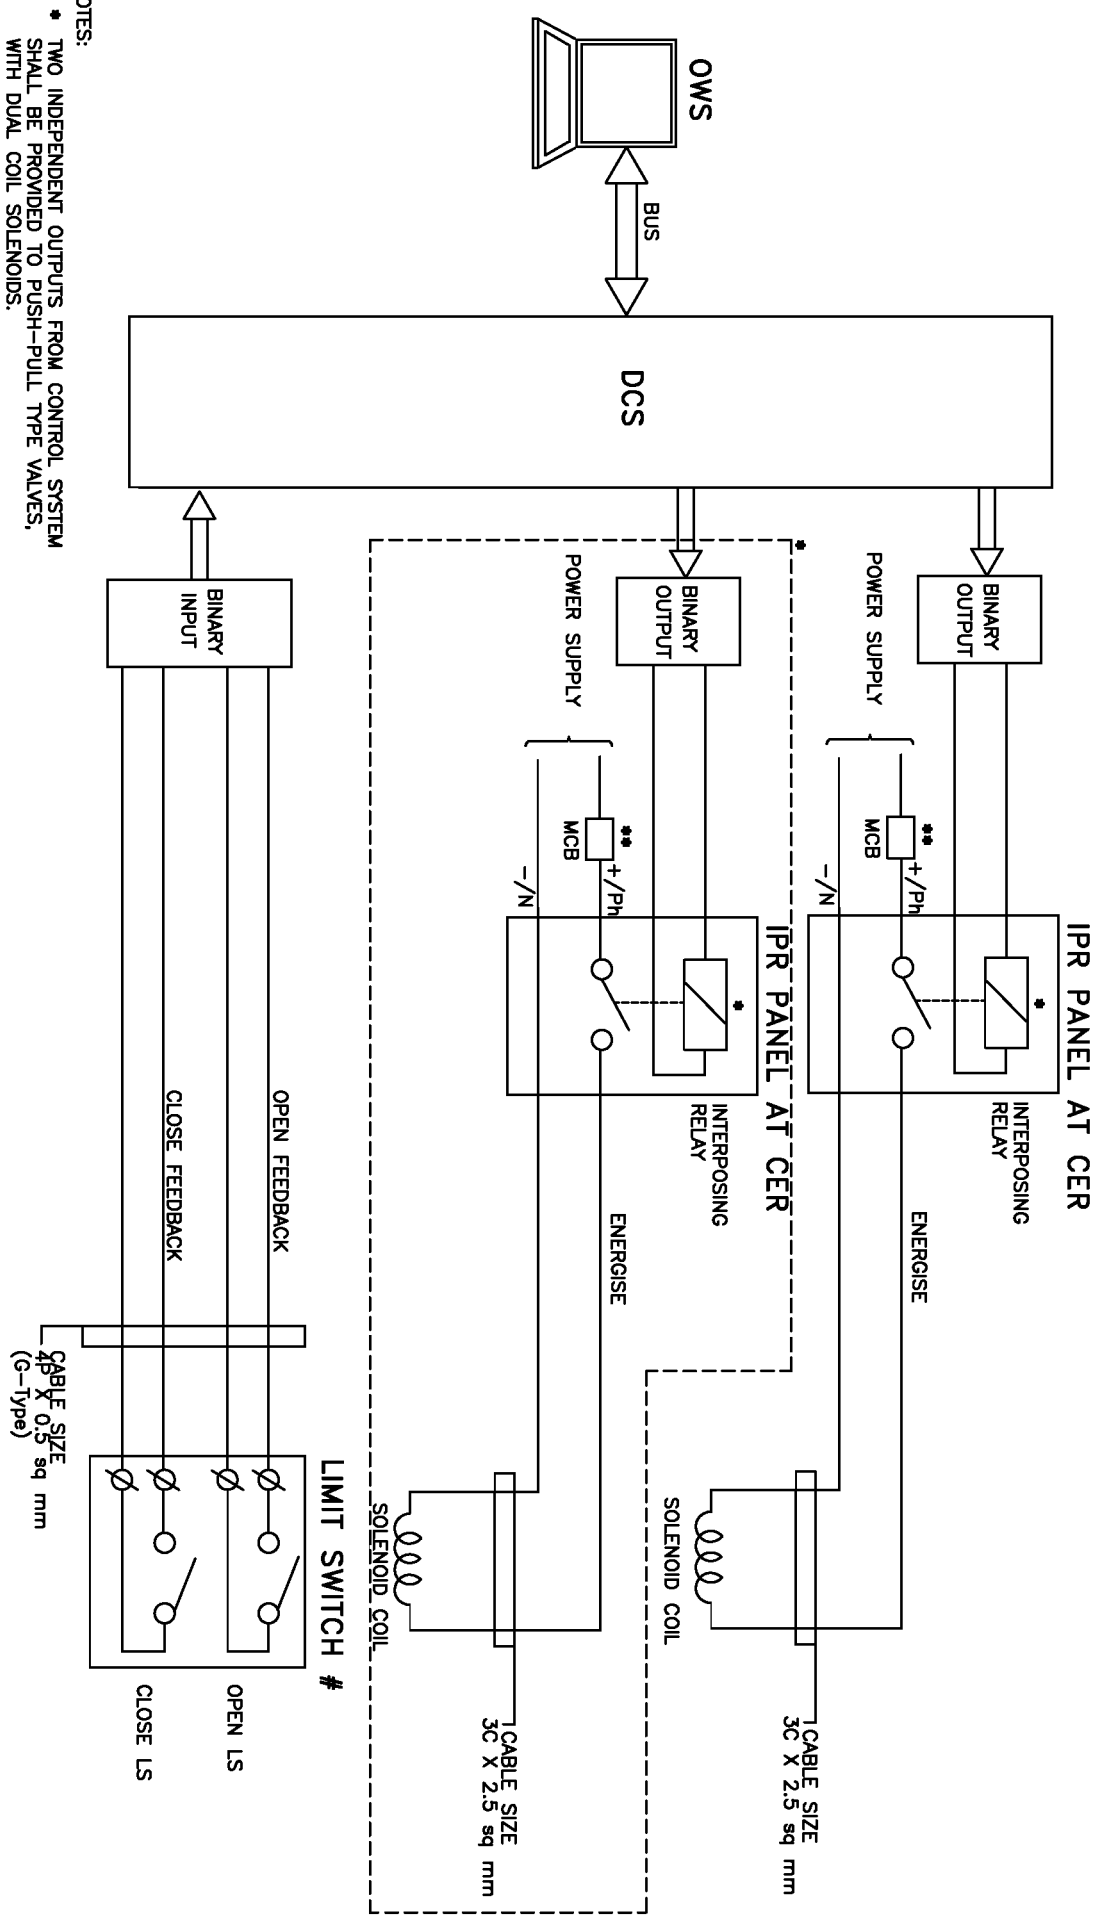

PROJECT:		1x660 MW BHUSAWAL STPP	
TITLE		DDCMIS INTERFACE FOR SOLENOID DRIVE	
DRG.NO.	PE-DM-415-145-1002	DATE	01.10.2018
REV.NO.	04	SHT	10 OF 12

DCS INTERFACE FOR HT/LT UNIDIRECTIONAL DRIVES(BREAKER OPERATED)

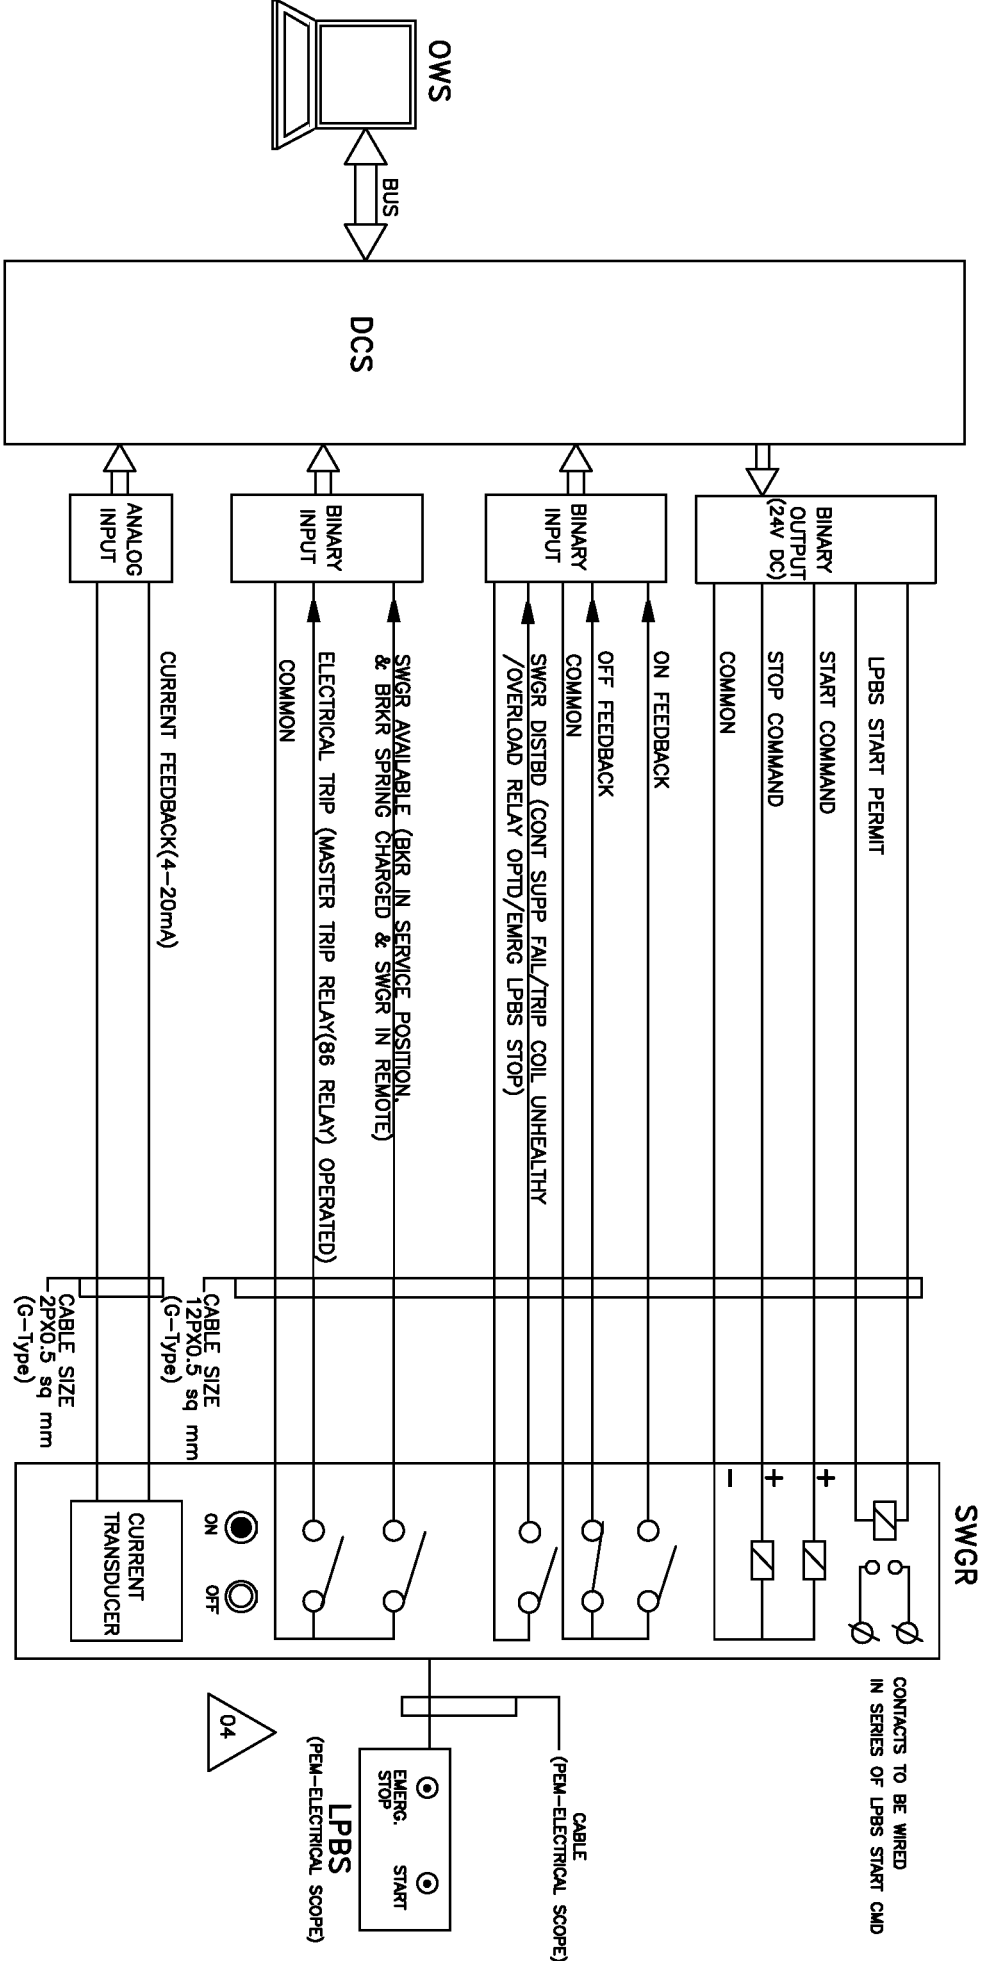


NOTE:- INTERPOSING RELAYS(IPRs) TO BE SUPPLIED ALONG WITH SWITCHGEAR.
BEARING AND WINDING TEMPERATURES FOR HT DRIVES SHALL BE HOOKED TO DCS.



	PROJECT:	1x660 MW BHUSAWAL STPP	DRG.NO.	PE-DM-415-145-1002
	TITLE	DDCMIS INTERFACE FOR UNIDIRECTIONAL HT DRIVE	DATE	01.10.2018
			REV.NO.	04
			SHT	11 OF 12

DCS INTERFACE FOR ANALOG DRIVE

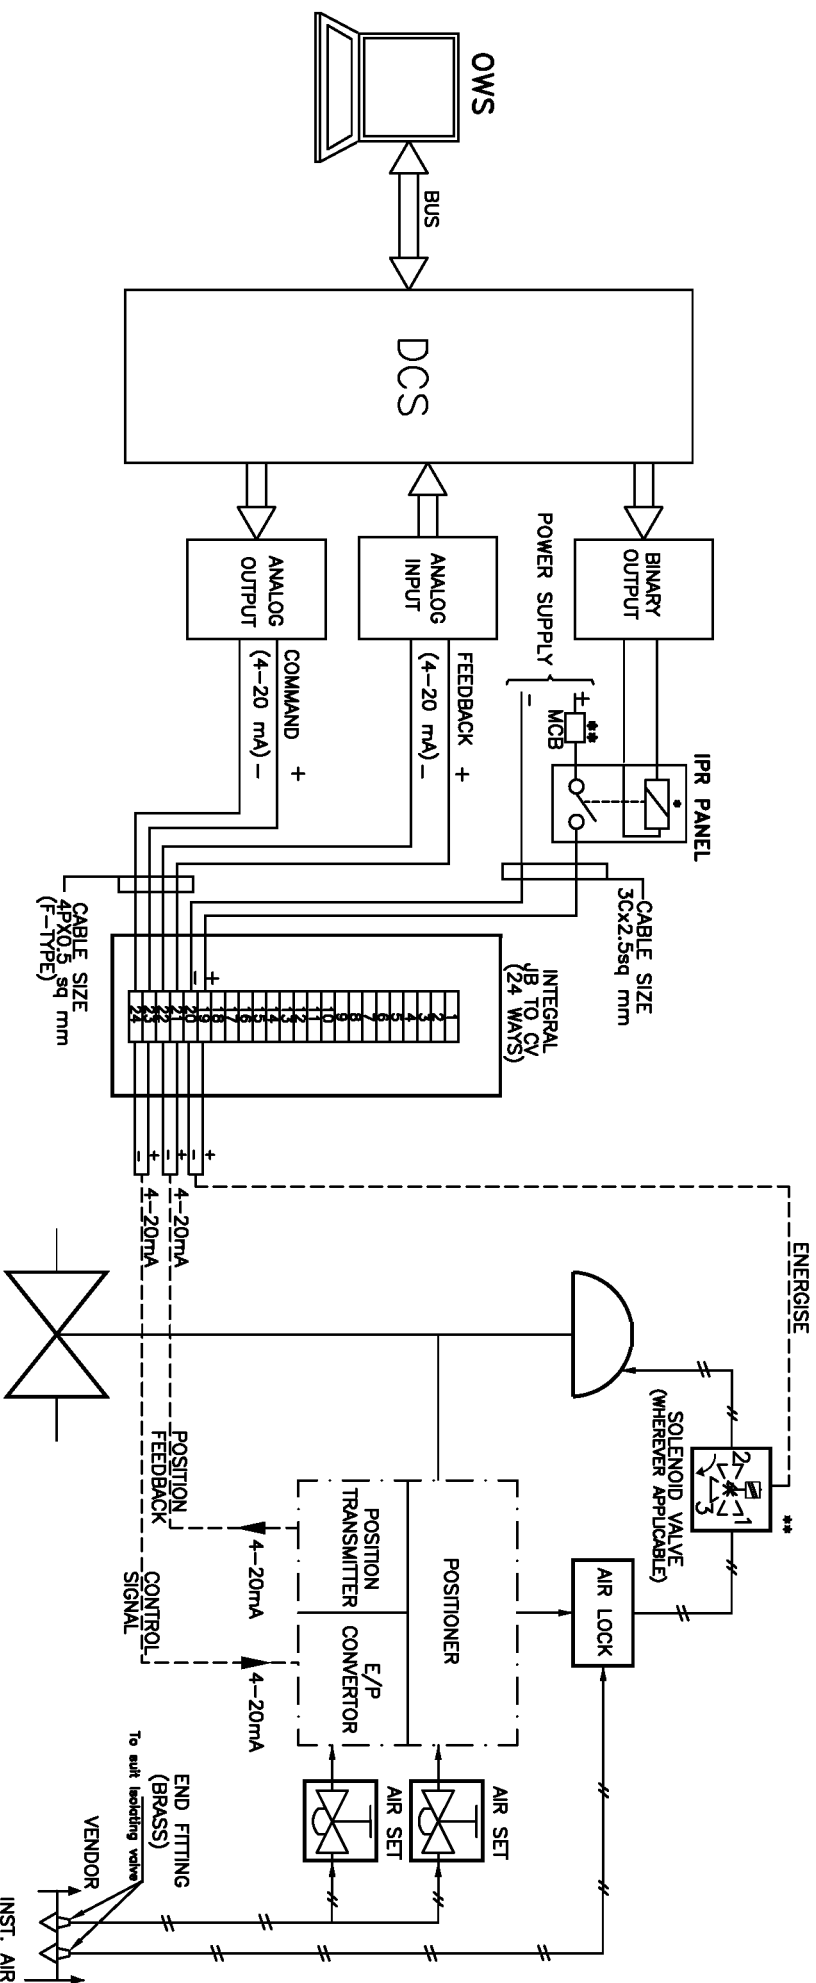

NOTES:

**** APPLICABLE TO VALVES WHERE PROTECTION OPEN/CLOSE ACTION FOR CONTROL DEMAND OVERRIDING IS REQUIRED.**

	PROJECT:		1x660 MW BHUSAWAL STPP	
	TITLE		TYPICAL HOOK-UP DIAGRAM ANALOG DRIVE	
	DRG. NO.	PE-DM-415-145-1002		
	DATE	01.10.2018		
	REV. NO.	04		
	SHT	12	OF	12

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I

APPLICABLE CODES AND STANDARDS

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 1
REV: R0	CONTROL & INSTRUMENTATION	Page 37 of 718
The required quantities of cable accessories shall be similarly estimated on the basis of number of terminations and proposed routing of the cables and shall be included in the offer allowing a positive allowance of at least 30% for each accessory. The exact quantity of different accessories shall be specified in the offer. Any shortfall in the quantity of accessories observed during actual laying shall be compensated at no extra cost. 5.0 <u>PROVEN PRODUCT</u> 5.1 The offered model of DCS, Microprocessor based control system must have been successfully supplied, erected, tested and commissioned as complete station Control & Instrumentation system for at least two units of capacity not less than 600 MW supercritical Thermal Power Station(s) with reheat type pulverized coal fired boiler. Further, these units should be in successful operation for a minimum period of two (2) years. 5.2 Similarly, all other C&I equipment/PLC/systems/sub-systems/instruments and accessories in the power cycle shall also be of make and model whose guaranteed and trouble-free performance has been proven at least for two (2) years in not less than two (2) different reheat type pulverized coal fired units of unit size not less than 500 MW. 5.3 Bidder shall furnish required information to fully satisfy Owner regarding successful operation and high reliability of products/systems furnished. 6.0 <u>CODES AND STANDARDS</u> 6.1 Items such as thermowells, control valves, flow elements and other in line devices in high and medium pressure steam, feed water and similar services, which fall under the purview of Indian Boiler Regulation Act shall be either certified by IBR or shall be certified by authorities acceptable to IBR. It shall be responsibility of Bidder to obtain the necessary approval of the concerned Authority/Chief Inspector of Boiler for the design and design calculations, manufacturing and erection procedure as called for under the IBR Act for all items requiring such certification. 6.2 Generally, the following latest edition of codes and standards prevailing at the time of award of contract shall be applicable.		

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 1
REV: R0	CONTROL & INSTRUMENTATION	Page 38 of 718
6.2.1 Temperature Measurement (a) Instrument and apparatus for temperature measurement - ASME PTC 19.3 (1974). (b) Temperature Measurement - Thermocouples - ANSI - MC 96.1 - 1982. (c) Temperature Measurement by electrical resistance thermometers - IS: 2806. (d) Thermometer-element-Platinum resistance - IS: 2848 / DIN 43760. 6.2.2 Pressure Measurement (a) Instrument and apparatus for pressure measurement - ASME PTC 19.2 (1964). (b) Bourdon tube pressure and vacuum gauges - IS: 3624/1996. 6.2.3 Flow Measurement (a) Instruments and apparatus for flow measurement - ASME PTC 19.5 (1972) Interim supplement, Part-II. (b) Measurements of fluid flow in closed conduit - BS 1042. 6.2.4 Electronic Measuring Instruments and Control Hardware (a) Automatic null balancing electrical measuring instruments -ANSI C 39.4 (Rev. 1973), IS 9319. (b) Safety requirements for electrical and electronic measuring and controlling instrumentation - ANSI C 39.5/1974. (c) Compatibility of analog signals for electronic industrial process instruments - ISA-S 50.1: ANSI MC 12.1/1975. (d) Dynamic response testing of process control instrumentation - ANSI MC 4.1 (1975) - ISA -S26 (1968).		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – 1
REV: R0	CONTROL & INSTRUMENTATION	Page 39 of 718
(e) Surge withstand capability (SWC) tests - ANSI C 37.90A (1989), IEC-255.4. (f) Printed circuit boards - IPC TM-650, IEC 326C. (g) General requirements and tests for printed wiring boards - IS-7405 (Part-I)/1973. (h) Edge socket connectors - IEC 130-11. (i) Requirements and methods of testing of wire wrap terminations- DIN 41611 Part-2. (j) Dimensions of attachment plugs and receptacles- ANSI C73-1973. (Supplement ANSI C73a – 1980. 6.2.5 Instrument Switches and Contacts (a) Contact Rating - AC services NEMA ICS Part-2 125, A-600. (b) Contact Rating - DC services NEMA ICS Part-2 125, N-600. 6.2.6 Enclosures (a) Enclosures for Industrial Controls and Systems–NEMA ICS-6-110.15 through 110.22. (b) Racks, panels and associated equipment -EIA: RS-310-B-1983 (ANSI C83.9 - 1972). 6.2.7 Apparatus, Enclosures and Installation Practices in Hazardous Area (a) Classification of hazardous area - NEMA Article 500, Volume-6, 1978. (b) Electrical Instruments in hazardous dust locations - ISA-RP 12.11. (c) Intrinsically safe apparatus - NFPA Article 493 Volume-4 1978.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 40 of 718
(d) Purged and pressurized enclosure for electrical equipment in hazardous location - NFPA Article 496 Volume-4, 1978.		
6.2.8	Sampling System	
(a) Stainless Steel material of tubing and valves, for sampling system - ASTM A 269-79 GRTO-316.		
(b) Submerged helical coil heat exchangers for sample coolers - ASTM D11-98.		
6.2.9	Annunciator	
(a) Specifications and guides for the use of general-purpose annunciators - ISA RP 18.1.		
(b) Surge withstand capability tests -ANSI C37.90 a -1971 and IEEE Standard 472-1974.		
6.2.10	Interlocks, Protections	
(a) Relays and relay system associated with electric power apparatus - IEEE Standards 3.13.		
(b) Surge withstand capability tests - ANSI C37.90 a - 1971 and IEEE Standard 472-1974.		
(c) General requirements and tests for switching devices for control and auxiliary circuits including contactor relays - IS-6875 (Part-I)/ 1973.		
(d) Turbine water damage prevention - ASME-TDP-1-1980.		
(e) Boiler safety interlocks - NFPA Section 85B, 85D, 85E, 85F, 85G.		
6.2.11	UPS System	
(a) Practice and requirements for semi-conductor power rectifiers - ANSI C34.2.		

	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 41 of 718
(b) Relays and relay systems associated with electrical power apparatus IEEE Standard - 3.13. (c) Surge withstand capability tests - ANSI C 70.90 A/1971, IEC-255.4. (d) Recommended practice for sizing large lead storage batteries for generating stations and sub-stations - -IEEE-485. (e) Battery: IEEE Std. 1106/IS, 10918, BS 6920-II: 1984, IS 1652, IEC 896-1987. (f) For Lead acid plante type battery selection & sizing : IEEE Std. 485:1997 6.2.12 Control Valves (a) Control valve sizing (Incompressible fluids) - ISA-S39.2 / 1972. (b) Control valve sizing (Compressible fluids) - ISA-S39.4 / 1972. (c) Control Valve seat leakage – ANSI / FCI 70.2. (d) Face to face dimensions of Control Valves - ANSI B16.10. (e) Control Valve Capacity Test Procedure – ISA – S75.02. 6.2.13 Instrument Tubing (a) Seamless Carbon Steel Pipe - ASTM-A-106. (b) Forged carbon steel fittings - ASTM-A-105. (c) Dimensions of fittings - ANSI-B16.11. (d) Code for pressure piping, welding, hydrostatic testing - ANSI-B 31.1. (e) Nomenclature for instrument tube fittings - ISA-RP 42.1 / 1982. (f) Seamless Stainless Steel Tube ASTM A-213 TP 316 / ASTM A-269 TP 316.		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 42 of 718
(g) Seamless Alloy Steel Pipe ASTM A 335 P22. (h) Seamless Stainless Steel Pipe ASTM A-312 TP 316. 6.2.14 Cables (a) Thermocouple extension wires/cables - ANSI MC96.1. (b) Insulated Wire and Cable for the Transmission and Distribution of Electrical Energy-IPCEA S-61-402. (c) Guide for design and installation of cable system in power generating station (insulation, jacket materials) -IEEE Standard 422. (d) Requirements of vertical tray flame test - IEEE 383. (e) Standard specification for tinned soft or annealed copper wire for electrical purpose - ASTM B33. 6.2.15 Electronic Cards, Subassemblies and Components (a) Unpackaged. (i) Vibration : IEC-68.2.6 (ii) Shock : IEC-68.2.27 (iii) Drop & Topple : IEC-68.2.31 (b) Packaged Vibration, Drop & Static Compression – NSTA. (c) Electromagnetic Compatibility (i) Electrical Fast Transient : IEC-801.4 (ii) Surge Withstand : IEC-255.4		

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: V
	BID SPECIFICATION NO.:DG/BSL U-6/2011/T-1	Section – I
REV: R0	CONTROL & INSTRUMENTATION	Page 43 of 718
	(iii) Radiated Electromagnetic Field : IEC-801.3 (iv) Electrostatic Discharge : IEC-801.2 (v) Electromagnetic Emissions : VDE 0871, Class-B	
6.2.16 Cable Trays, Conduits (a) Guide for the design and installation of cable system in power generating station (cable trays, support systems, conduits)- IEEE Standard 422, NEMA VE-1, NEC-1981. Test Standards NEMA VE-1-1979. (b) Galvanizing of carbon steel cable trays - ASTM A-386.		
7.0 This section lays down the general design criteria to be adapted in designing the instrumentation and control system of the plant.	<u>DESIGN CRITERIA</u>	
7.1 7.1.1	<u>GENERAL REQUIREMENTS</u>	
	Instrumentation, control and automation devices and accessories shall be designed with the following considerations: (a) Stable in spite of temperature fluctuations. (b) Able to withstand high humidity. (c) Weather proof. (d) Dust proof. (e) Corrosion resistant. (f) Erosion resistant. (g) Able to withstand high vibration.	

	1X660 MW Bhusawal STPP	SECTION: C SUB SECTION : C&I
DRAWINGS		

G.A. DRAWING – TRANSMITTER RACK

FOR BID PURPOSE ONLY

DO NOT SCALE

DATE : 23-08-2011

ISSUE	BY	CH	DATE

PROCON ENGINEERS
(DIVISION OF NIMOTO CONSULTING ENGINEERS PVT. LTD.)

CLIENT : MAHARASHTRA STATE POWER GENERATION CO.LTD.

PROJECT : BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT

G.A. DRAWING-TRANSMITTER RACK

SCALE ~


APPROVED

DIV INST.

DR P.N.Z.

CH D.J.P.

DWG.NO.PE-189-IN-SK-8004 (SH. 1 of 10) PO

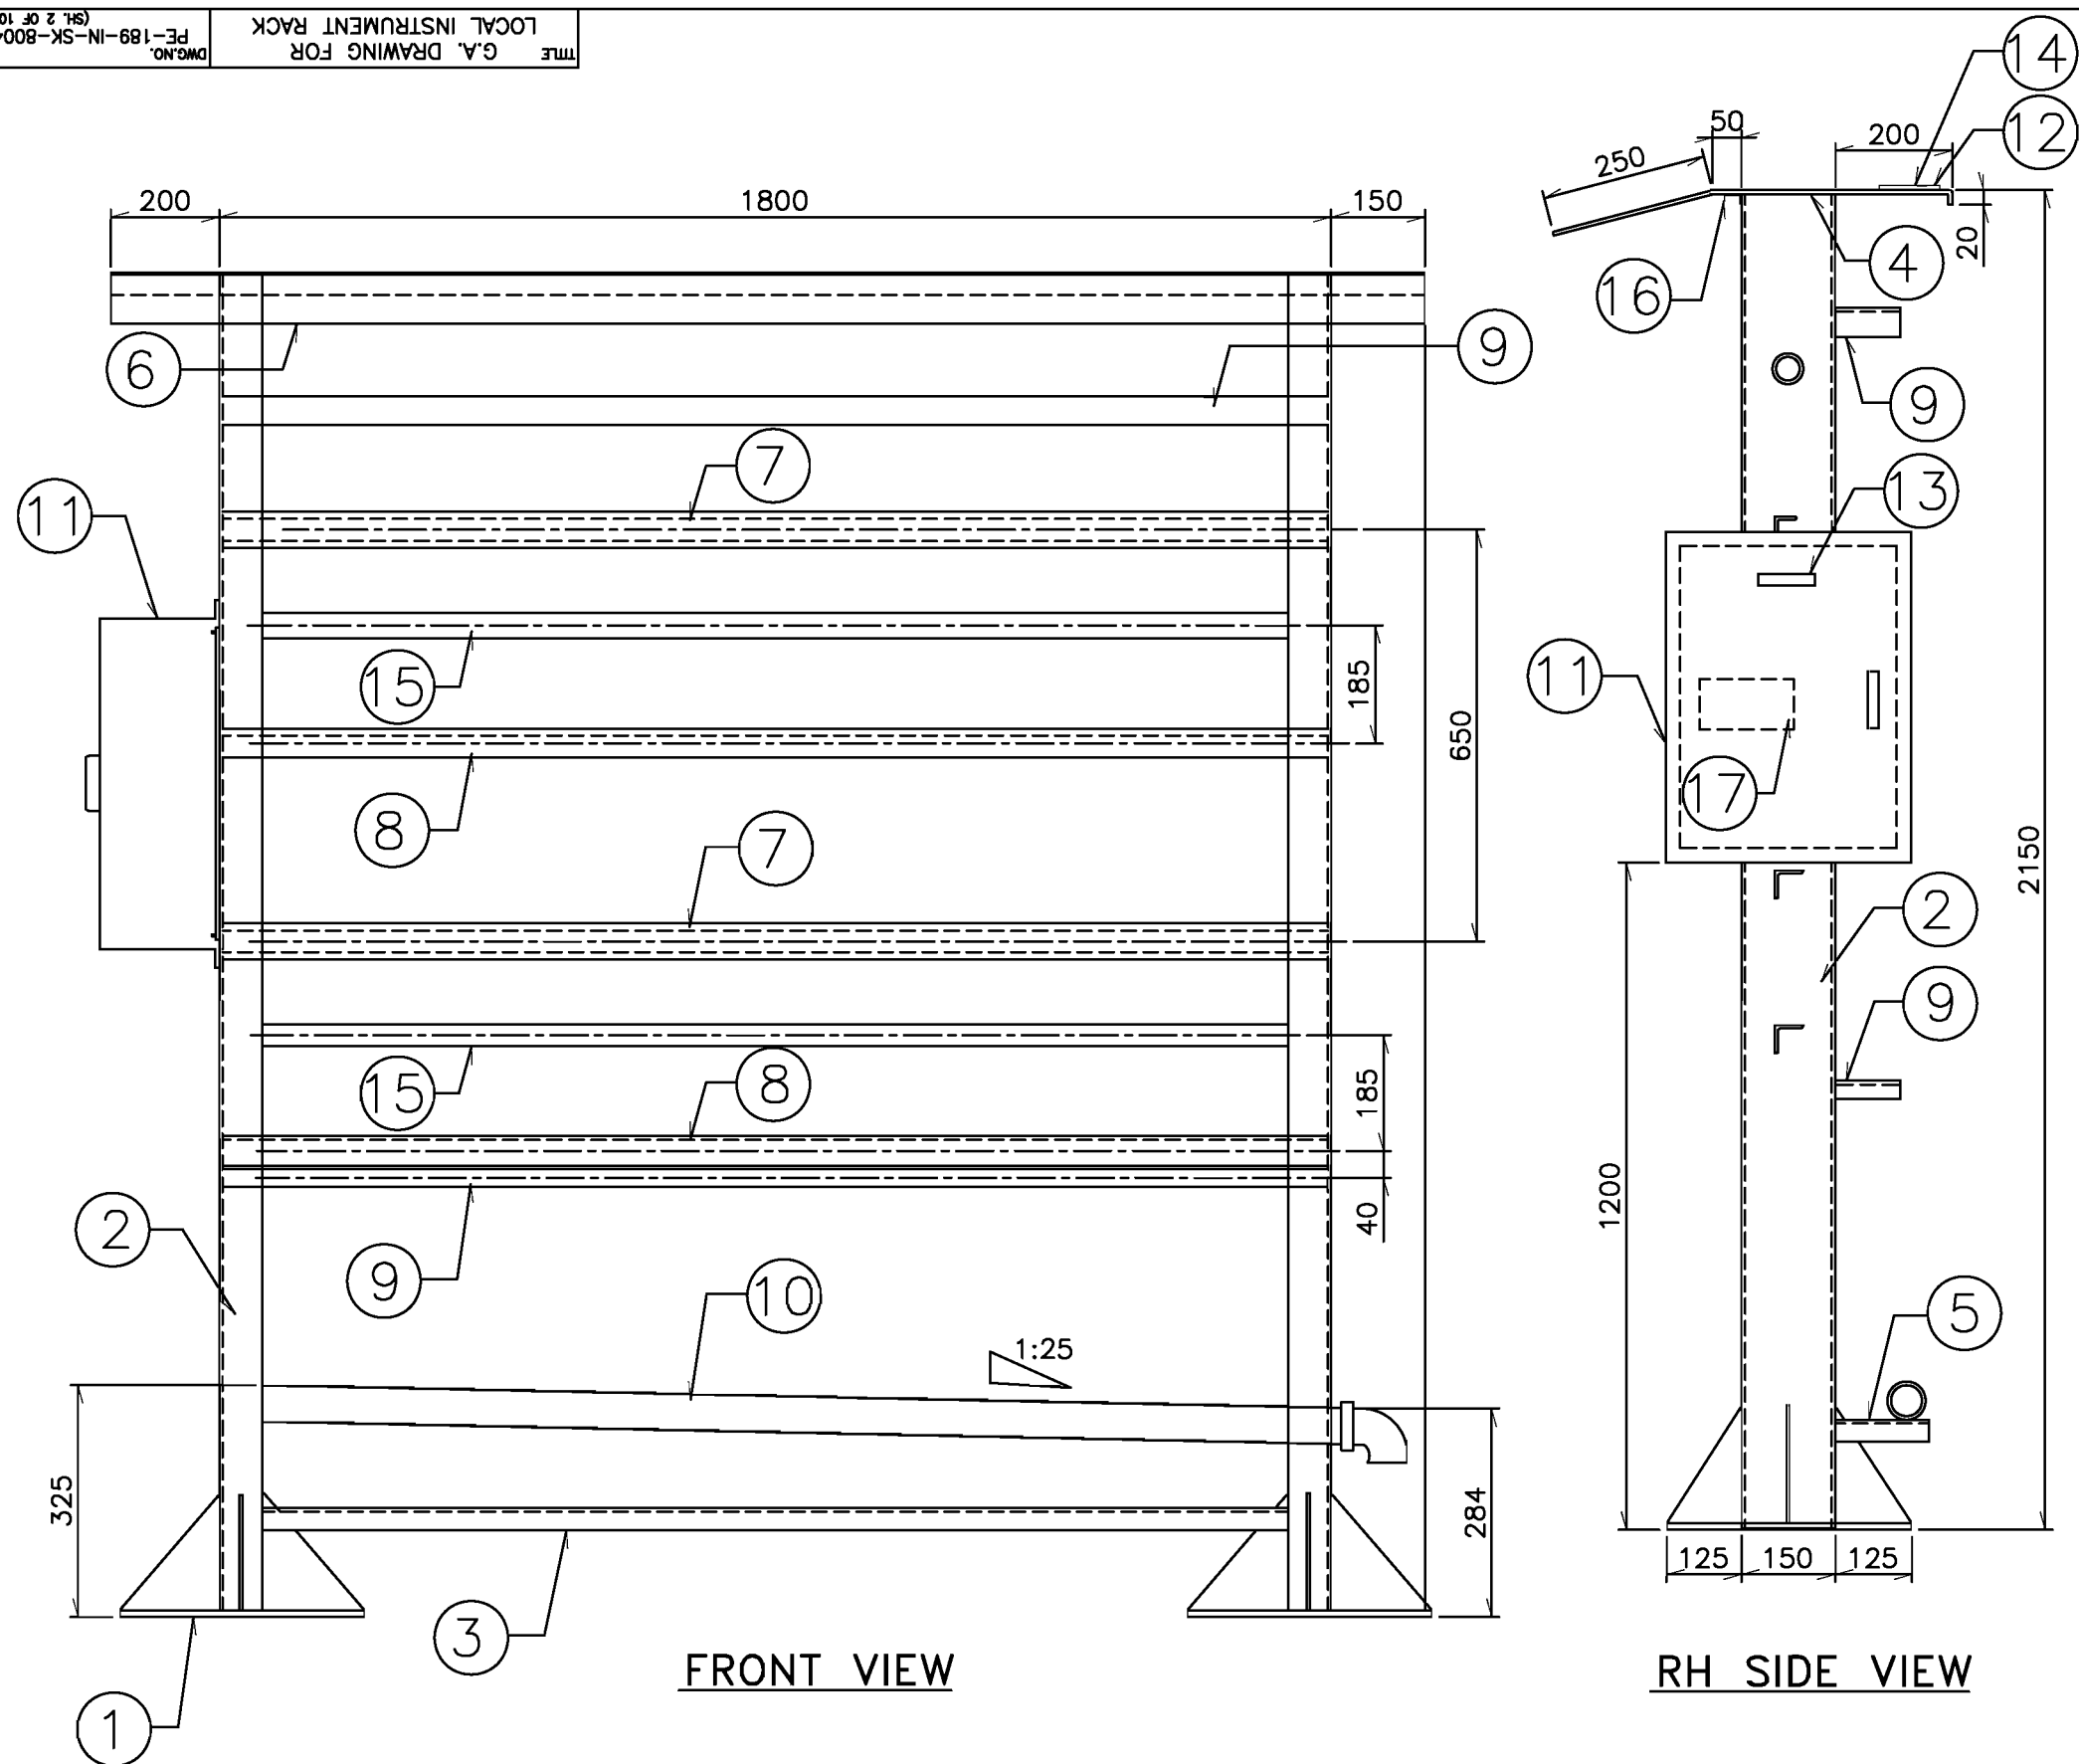

LEGEND:

ITEM NO.	DESCRIPTION
1.	M.S. PLATE 400 x 400 x 10
2.	ISM 150 x 75 x 6
3.	ISM 75 x 40 x 5
4.	CANOPY MOUNTING PLATE 5mm THICK.
5.	BRACKET FOR DRAIN PIPE.
6.	CANOPY ASSEMBLY 3.0mm THICK CRCA SHEET.
7.	GI PIPE 2" NB CLASS B FOR TRANSMITTER MOUNTING.
8.	M.S. ANGLE 40 x 40 x 5
9.	BRACKET FOR IMPULSE PIPE SUPPORT.
10.	DRAIN PIPE MATERIAL ASTM A106 GR. 'C' SIZE 2" NB SCH 80.
11.	JUNCTION BOX SIZE: 480(H) x 360(W) x 180(D).
12.	BULKHEAD M.S. PLATE 5mm THICK.
13.	COMPACT FLUORESCENT LAMP FOR RACK ILLUMINATION.
14.	XLPE GASKET IN BETWEEN BULKHEAD PLATE & CANOPY MOUNTING PLATE.
15.	PVC CABLE TRAY/ FLEXIBLE CONDUIT FOR CABLE
16.	C' CHANNEL FOR LIGHT FITTING.
17.	TAG PLATE.

NOTES:

1. POWER SOCKET & TB SHALL BE PROVIDED IN JB.
2. COLOR: RAL 7032. OVERALL THICKNESS > 100 MICRONS.
3. TAG PLATE SHALL BE PROVIDED FOR EACH INSTRUMENT.
4. 20% TERMINALS SHALL BE PROVIDED AS SPARE.
5. ANTIVIBRATION PAD & FOUNDATION BOLTS SHALL BE PROVIDED.
6. DIMENSIONS SHOWN ARE TENTATIVE AND SHALL BE FINALIZED AT DETAILING.
7. ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED.

FOR BID PURPOSE ONLY

DO NOT SCALE

ISSUE	REVISIONS	BY	CLEARED					APPD	DATE	FOR R0 ISSUE ONLY			1" (PRELIMINARY) ISSUES ARE NOT TO BE USED FOR CONSTRUCTION / FABRICATION BUT ARE ISSUED FOR LIMITED PURPOSES ONLY AS INDICATED IN THE SMALL BLOCK AT THE TOP RIGHT HAND CORNER OF THE TITLE BLOCK. CONSTRUCTION / FABRICATION WORK IS PERMITTED ON 'R' (RELEASED) ISSUES ONLY. INFORMATION CONTAINED WITHIN 'HOLD' IS NOT RELEASED FOR CONSTRUCTION / FABRICATION. FIELD MUST GET DESIGN OFFICE TO CLEAR 'HOLD' IN TIME BEFORE PROCEEDING WITH ANY CONSTRUCTION / FABRICATION WORK RELATED TO 'HOLD'. DRAWINGS SIGNED BY PROCON ENGINEERS' AUTHORIZED REPRESENTATIVE ONLY ARE CONSIDERED VALID DRAWINGS.
			CHEM	CIVIL	ELEC	I&C	MECH			DEPT	SIGNATURE	DATE	




MAHARASHTRA STATE POWER GENERATION CO.LTD.
BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT

G.A. DRAWING FOR
LOCAL INSTRUMENT RACK

PROCON ENGINEERS
(DIVISION OF NIMOTO CONSULTING ENGINEERS PVT.LTD.)

SCALE ~	APPROVED	DATE (R0 ISSUE)
DIV. INST.		DATE (CURRENT ISSUE)
DR. P.N.Z.		23-08-2011
CH. D.J.P.	DWG. NO. PE-189-IN-SK-8004 (SH. 2 OF 10)	ISSUE PO

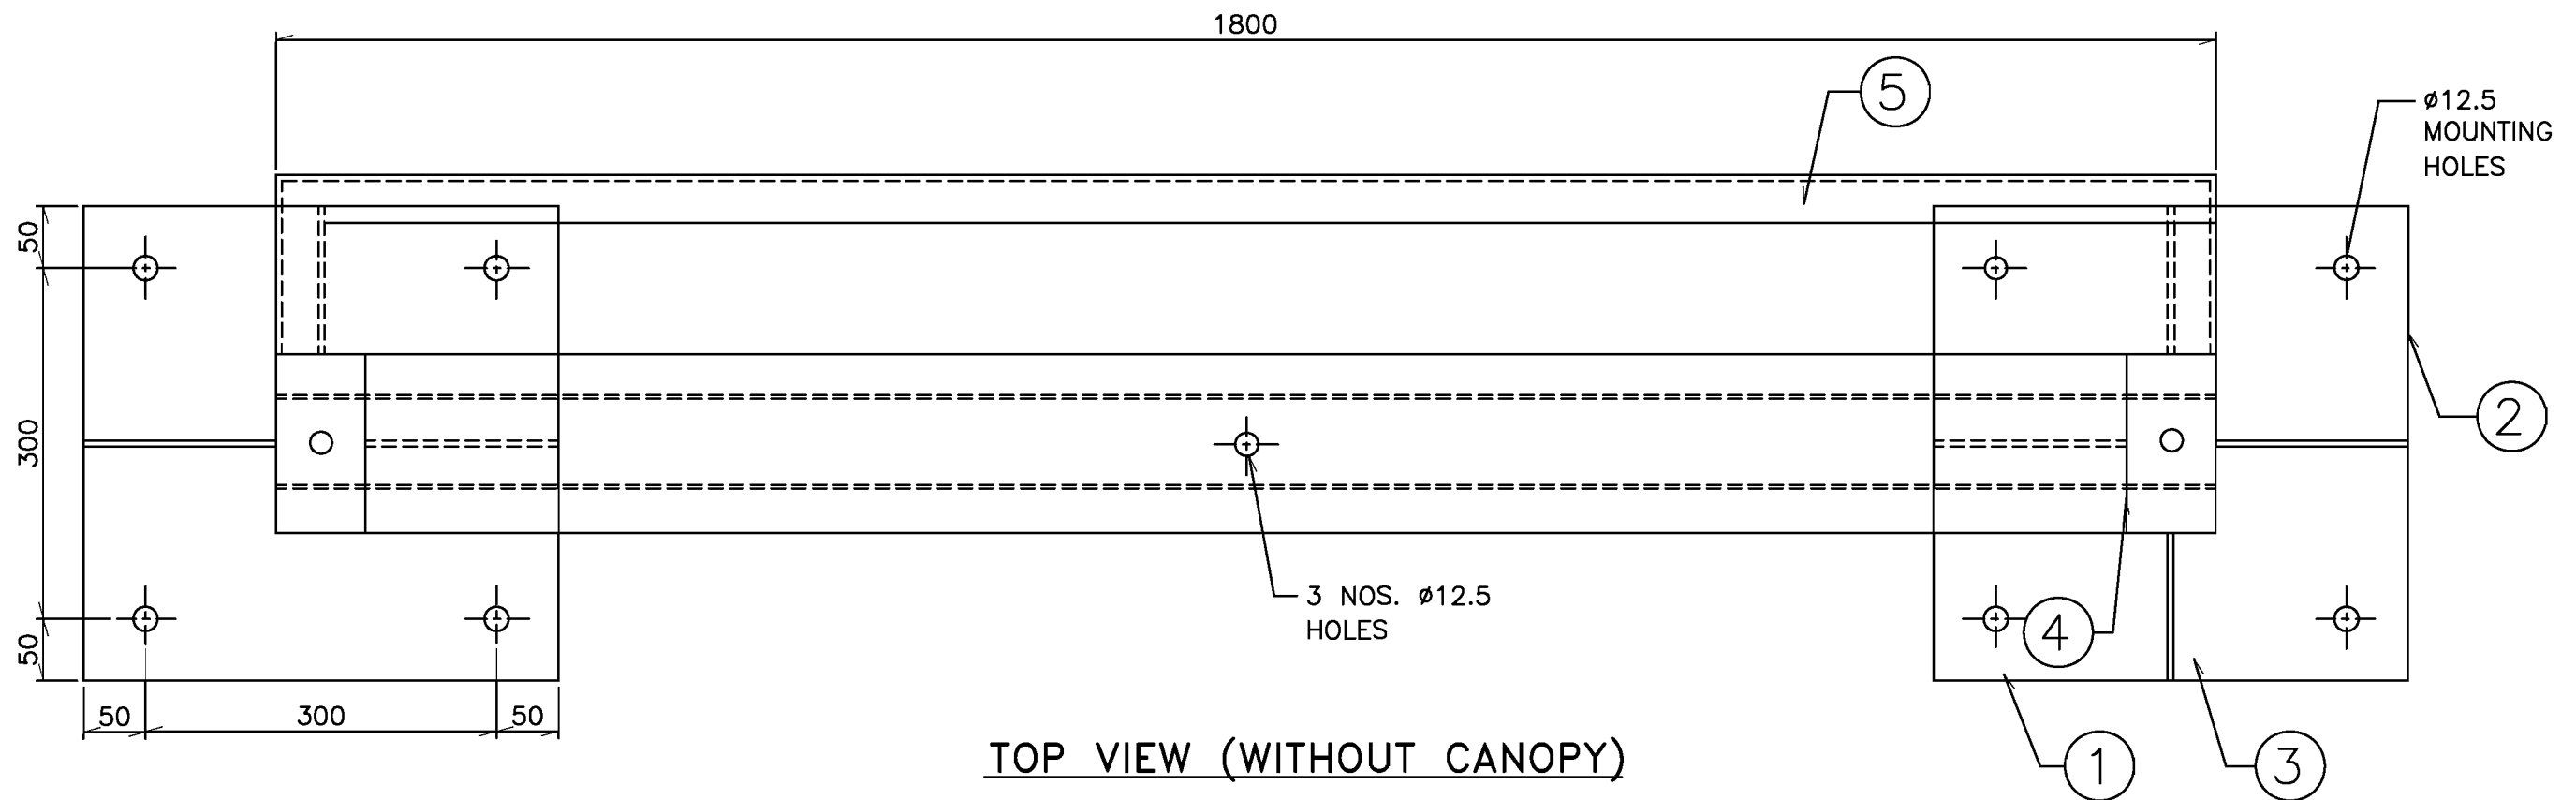

TOP VIEW (WITHOUT CANOPY)


NOTES:

1. M.S. PLATE 400 x 400 x 10.
2. RIB M.S. PLATE 162.5 x 170 x 5 THICK.
3. RIB M.S. PLATE 125 x 170 x 5 THICK.
4. RIB M.S. PLATE 134 x 165 x 5 THICK.
(CANOPY MOUNTING PLATE SUPPORT)
5. BRACKET FOR IMPULSE PIPE SUPPORT.
6. ALL DIMENSIONS ARE IN mm
UNLESS OTHERWISE SPECIFIED.


FOR BID PURPOSE ONLY

DO NOT SCALE


ISSUE	REVISIONS	BY	CLEARED					APPD	DATE	FOR R0 ISSUE ONLY			MAHAGENCO MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT VIEW OF LOCAL INSTRUMENT RACK W/O CANOPY	PROCON ENGINEERS (DIVISION OF NIMOTO CONSULTING ENGINEERS PVT.LTD.)			
			CHEM	CIVIL	ELEC	I&C	MECH			DEPT	SIGNATURE	DATE		SCALE ~	APPROVED		DATE(R0 ISSUE)
										CHEM				DIV. INST.			DATE(CURRENT ISSUE)
										CIVIL				DR. P.N.Z.			23-08-2011
										ELEC				CH. D.J.P.	DWG.NO. PE-189-IN-SK-8004		ISSUE
										I&C					(SH. 3 OF 10)		P0
										MECH							

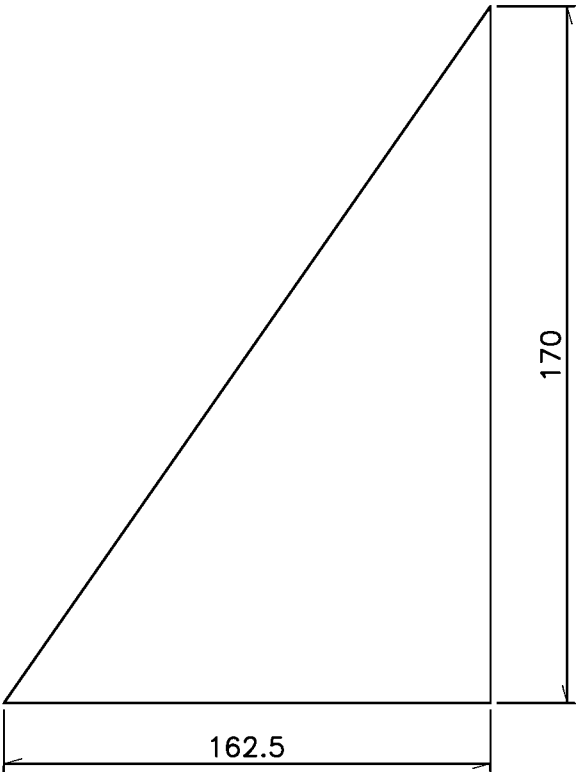

DETAIL OF-1

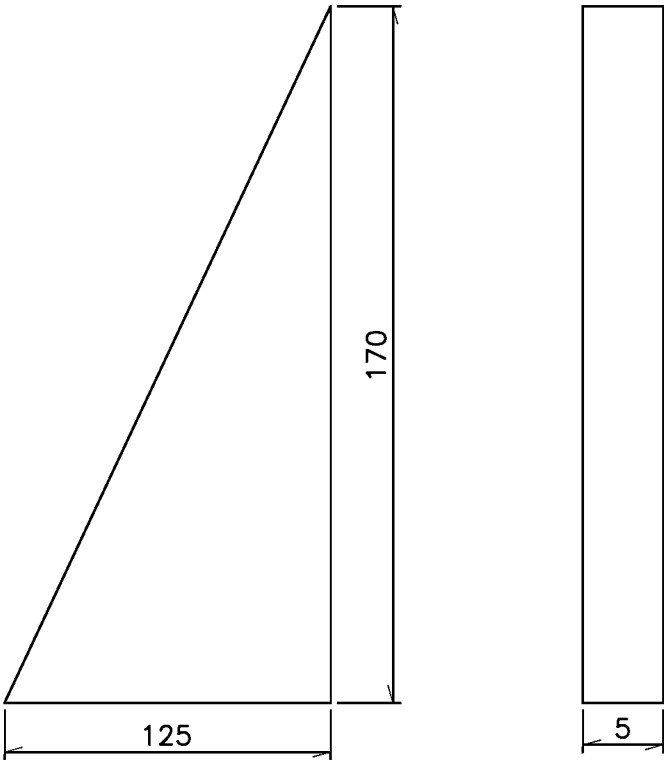

DETAIL OF-2

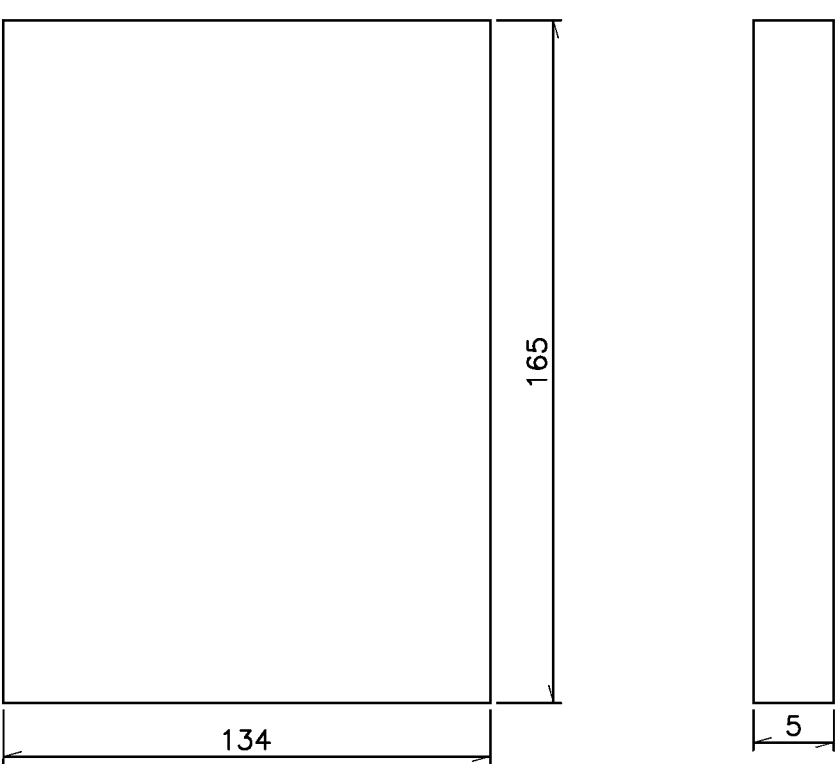

DETAIL OF-3


NOTES:

1. RIB M.S. PLATE 162.5 x 170 x 5 THICK.
2. RIB M.S. PLATE 125 x 170 x 5 HICK.
3. RIB M.S. PLATE 134 x 165 x 5 THICK.
4. ALL DIMENSIONS ARE IN mm
UNLESS OTHERWISE SPECIFIED.


FOR BID PURPOSE ONLY

DO NOT SCALE


ISSUE	REVISIONS	BY	CLEARED					APPD	DATE	FOR R0 ISSUE ONLY			 MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT G.A. DRAWING OF CLEATS FOR LOCAL INSTRUMENT RACK	PROCON ENGINEERS (DIVISION OF NIMOTO CONSULTING ENGINEERS PVT.LTD.)			
			CHEM	CIVIL	ELEC	I&C	MECH			CLEARED				SCALE ~	APPROVED		DATE(R0 ISSUE)
									DEPT	SIGNATURE	DATE	DIV. INST.			DATE(CURRENT ISSUE) 23-08-2011		
									CHEM			DR. P.N.Z.					
									CIVIL			CH. D.J.P.					
									ELEC			DWG.NO. PE-189-IN-SK-8004 (SH. 4 OF 10)				ISSUE	
									I&C							P0	
									MECH								

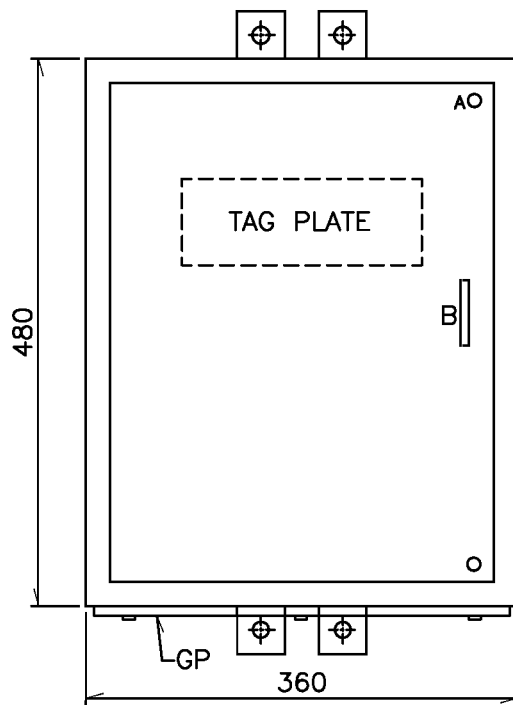

FRONT VIEW

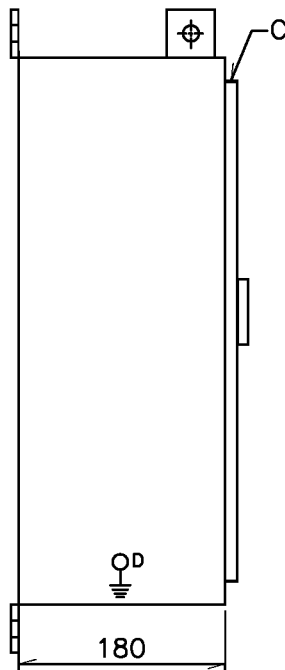

SIDE VIEW

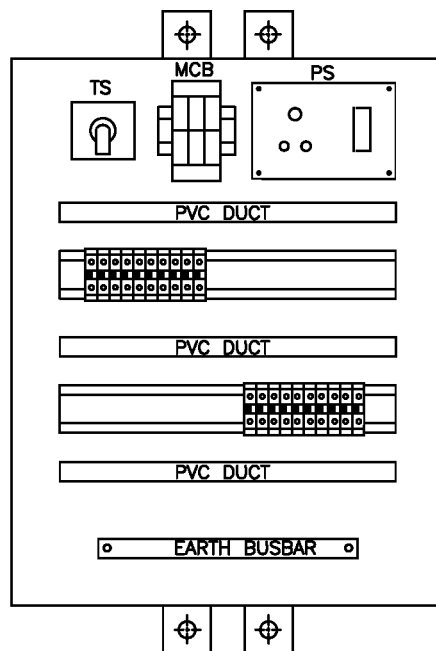

INTERNAL FRONT VIEW

LEGEND:

- A - DOOR LOCK
- B - DOOR HANDLE
- C - HINGES
- D - EARTH STUD
- GP - GLAND PLATE
- PS - POWER SOCKET
- TS - TOGGLE SWITCH
- TBS - TERMINAL BLOCKS

NOTES:

1. JB WILL BE MADE OUT OF 2.0 mm CRCA SHEET.
2. PROTECTION CLASS IP-65.
3. COLOR: EXT.-RAL 7032, INT.-BRILLIANT WHITE.
4. NUTS FOR MOUNTING THE JUNCTION BOX SHALL BE PROVIDED.
5. 3 mm THICK CRCA GLAND PLATE (GP) AT BOTTOM SHALL BE PROVIDED.
6. SCREWLESS CAGE CLAMP TERMINALS SHALL BE USED.
7. EARTH BUS BAR SHALL BE OF 25x6 TINNED COPPER.
8. INSTRUMENT TAG VIS-A-VIS SERVICE AND TERMINAL DETAILS SHALL BE PRINTED ON PHENOLIC BOARD MOUNTED ON BACK SIDE OF DOOR.
9. COLOR CODE FOR POWER SUPPLY:
PHASE-RED, NEUTRAL-BLACK & EARTH - GREEN.
10. CABLE FOR PANEL LIGHTING SHALL BE 1.5 SQ.mm, 1100V GRADE.
11. SIGNAL WIRING SHALL BE 4Px0.5 SQ.mm TINNED COPPER, TWISTED PAIR, OVERALL SHIELDED 500V GRADE, FRLS PVC.
12. ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED.

FOR BID PURPOSE ONLY

ISSUE	BY	CH	DATE

PROCON ENGINEERS
(DIVISION OF NIMOTO CONSULTING ENGINEERS PVT. LTD.)

CLIENT : MAHARASHTRA STATE POWER GENERATION CO.LTD.

PROJECT : BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT

DO NOT SCALE


DATE : 23-08-2011

G.A. OF JB LOCAL INSTRUMENT RACK


SCALE ~	APPROVED
DIV INST.	
DR P.N.Z.	
CH D.J.P.	

DWG.NO.PE-189-IN-SK-8004 (SHEET 5 OF 10) PO

LOCAL INSTRUMENT ENCLOSURE

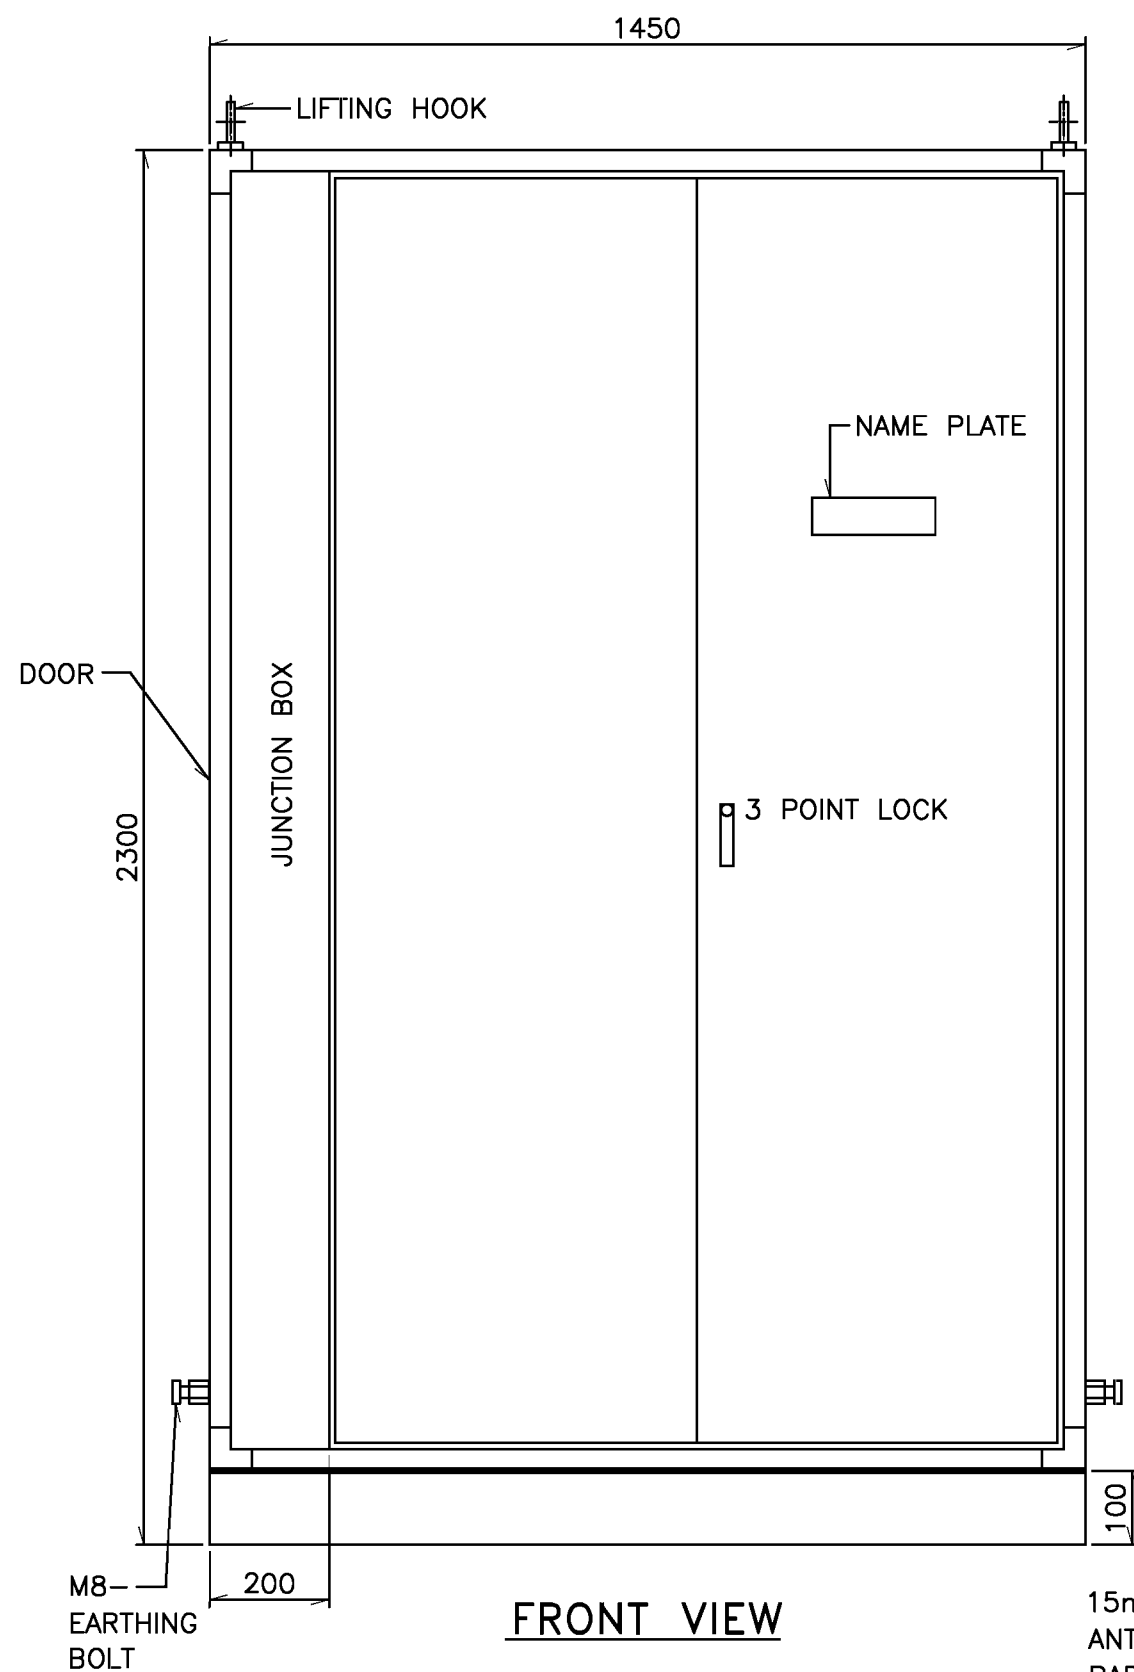

FRONT VIEW

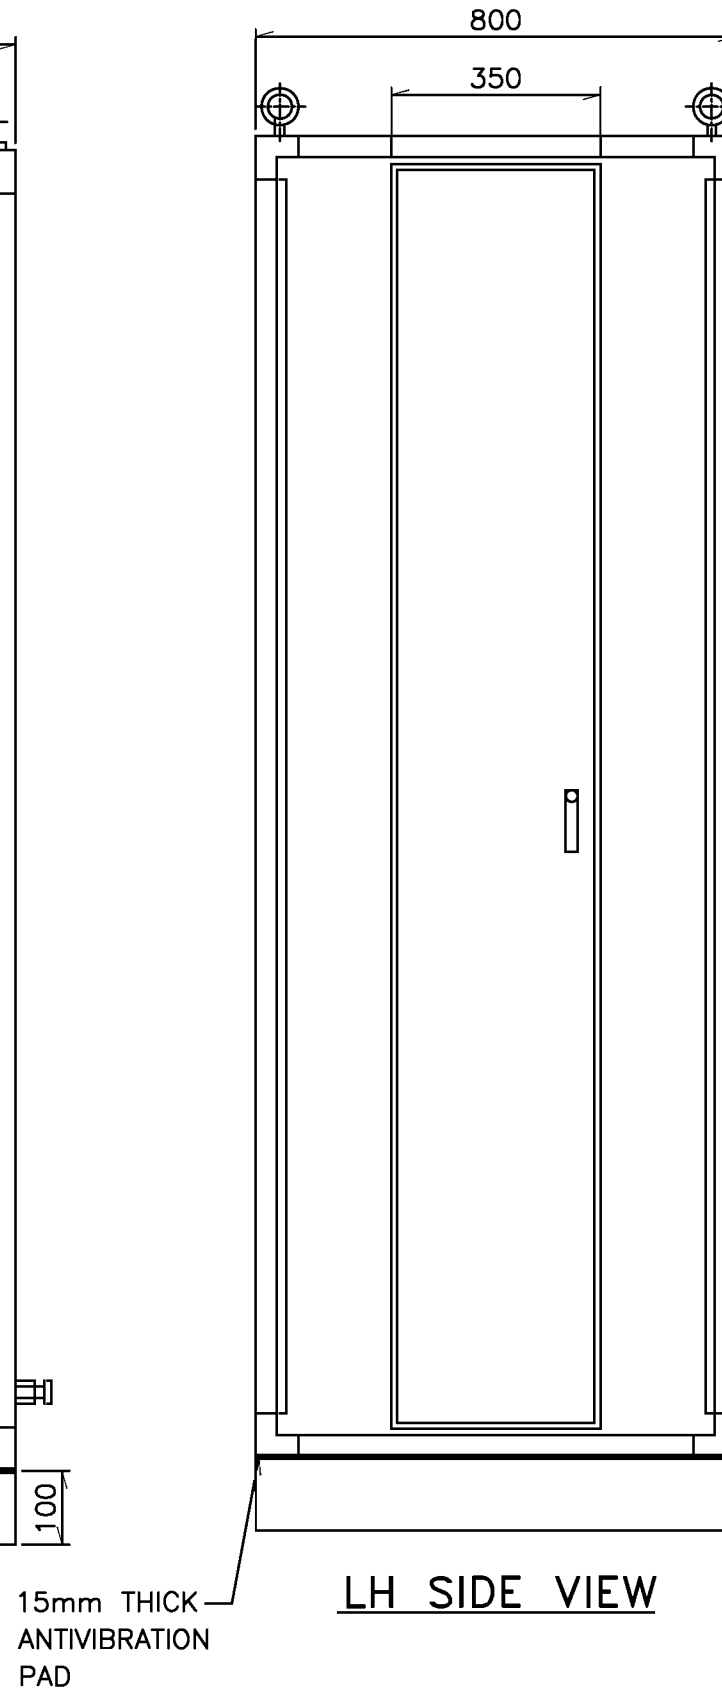

LH SIDE VIEW


NOTES:

- DIMENSIONS SHOWN ARE TENTATIVE AND SHALL BE FINALIZED AT DETAILING.
- ALL SHEETS SHALL BE 3mm THICK CRCA SHEET.
- ALL DOORS SHALL BE FLUSH/CONCEALED TYPE.
- COLOR:
EXTERIOR : RAL 7032.
INTERIOR : BRILLIANT WHITE OVER ALL THICKNESS WILL BE > 100 MICRONS.
- BASE FRAME WILL BE MADE OUT OF ISMC 100 AND COLOR WILL BE BLACK PAINT FINISH.
- BULKHEAD PLATE FOR TOP AND BOTTOM SHALL BE 1150 x 650 x 6.
- CABLE GLAND PLATE OF THICKNESS 3mm CRCA SHEET SHALL BE PROVIDED BOTTOM OF JUCTION BOX.
- ENCLOSURE PROTECTION CLASS SHALL IP-65.
- TERMINALS INSIDE JUCTION BOX SHALL BE SCREWLESS CAGE CLAMP TYPE.
- DOORS SHALL BE PROVIDED WITH CONCEALED HINGES, THREE POINT LOCKING FOR FRONT, REAR AND SIDE DOOR HINGES SHALL BE OF STAINLESS STEEL.
- XLPE GASKET SHALL BE PROVIDED BETWEEN BULKHEAD PLATE & ENCLOSURE.
- EARTH BUSBAR 25 x 6 TINNED COPPER.
- DRAIN PIPE SLOPE SHALL BE 1:25 APPROX.
- COMMON LOCK/KEY SHALL BE PROVIDED FOR ALL LIE'S & JB'S.
- FOUNDATION BOLTS SHALL BE PROVIDED.
- TAG PLATES SHALL BE PROVIDED FOR EACH INSTRUMENTS.
- INSTRUMENT TAG VIS-A-VIS SERVICE AND TERMINAL DETAILS SHALL BE PRINTED ON PHENOLIC BOARD MOUNTED ON BACK SIDE OF JUNCTION BOX DOOR.
- 20% TERMINALS SHALL BE PROVIDED AS SPARE.
- NAME PLATE OF PANEL SHALL BE FIXED ON FRONT DOOR.
- ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED.


FOR BID PURPOSE ONLY

DO NOT SCALE


ISSUE	REVISIONS	BY	CLEARED					APPD	DATE	FOR RO ISSUE ONLY			"P" (PRELIMINARY) ISSUES ARE NOT TO BE USED FOR CONSTRUCTION / FABRICATION BUT ARE ISSUED FOR LIMITED PURPOSES ONLY AS INDICATED IN THE SMALL BLOCK AT THE TOP RIGHT HAND CORNER OF THE TITLE BLOCK. CONSTRUCTION / FABRICATION WORK IS PERMITTED ON "R" (RELEASED) ISSUES ONLY. INFORMATION CONTAINED WITHIN 'HOLD' IS NOT RELEASED FOR CONSTRUCTION / FABRICATION. FIELD MUST GET DESIGN OFFICE TO CLEAR 'HOLD' IN TIME BEFORE PROCEEDING WITH ANY CONSTRUCTION / FABRICATION WORK RELATED TO 'HOLD'. DRAWINGS SIGNED BY PROCON ENGINEERS' AUTHORIZED REPRESENTATIVE ONLY ARE CONSIDERED VALID DRAWINGS.	MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT G.A. DRAWING FOR LOCAL INSTRUMENT ENCLOSURE	PROCON ENGINEERS (DIVISION OF NIMOTO CONSULTING ENGINEERS PVT.LTD.)			
			CHEM	CIVIL	ELEC	I&C	MECH			DEPT	SIGNATURE	DATE			SCALE ~	APPROVED	DATE(RO ISSUE)	
										CHEM					DIV. INST.		DATE(CURRENT ISSUE)	
										CIVIL					DR. P.N.Z.		23-08-2011	
										ELEC					CH. D.J.P.	DWG.NO. PF-189-IN-SK-8004 (SH. 6 OF 10)	ISSUE PO	
										I&C								
										MECH								

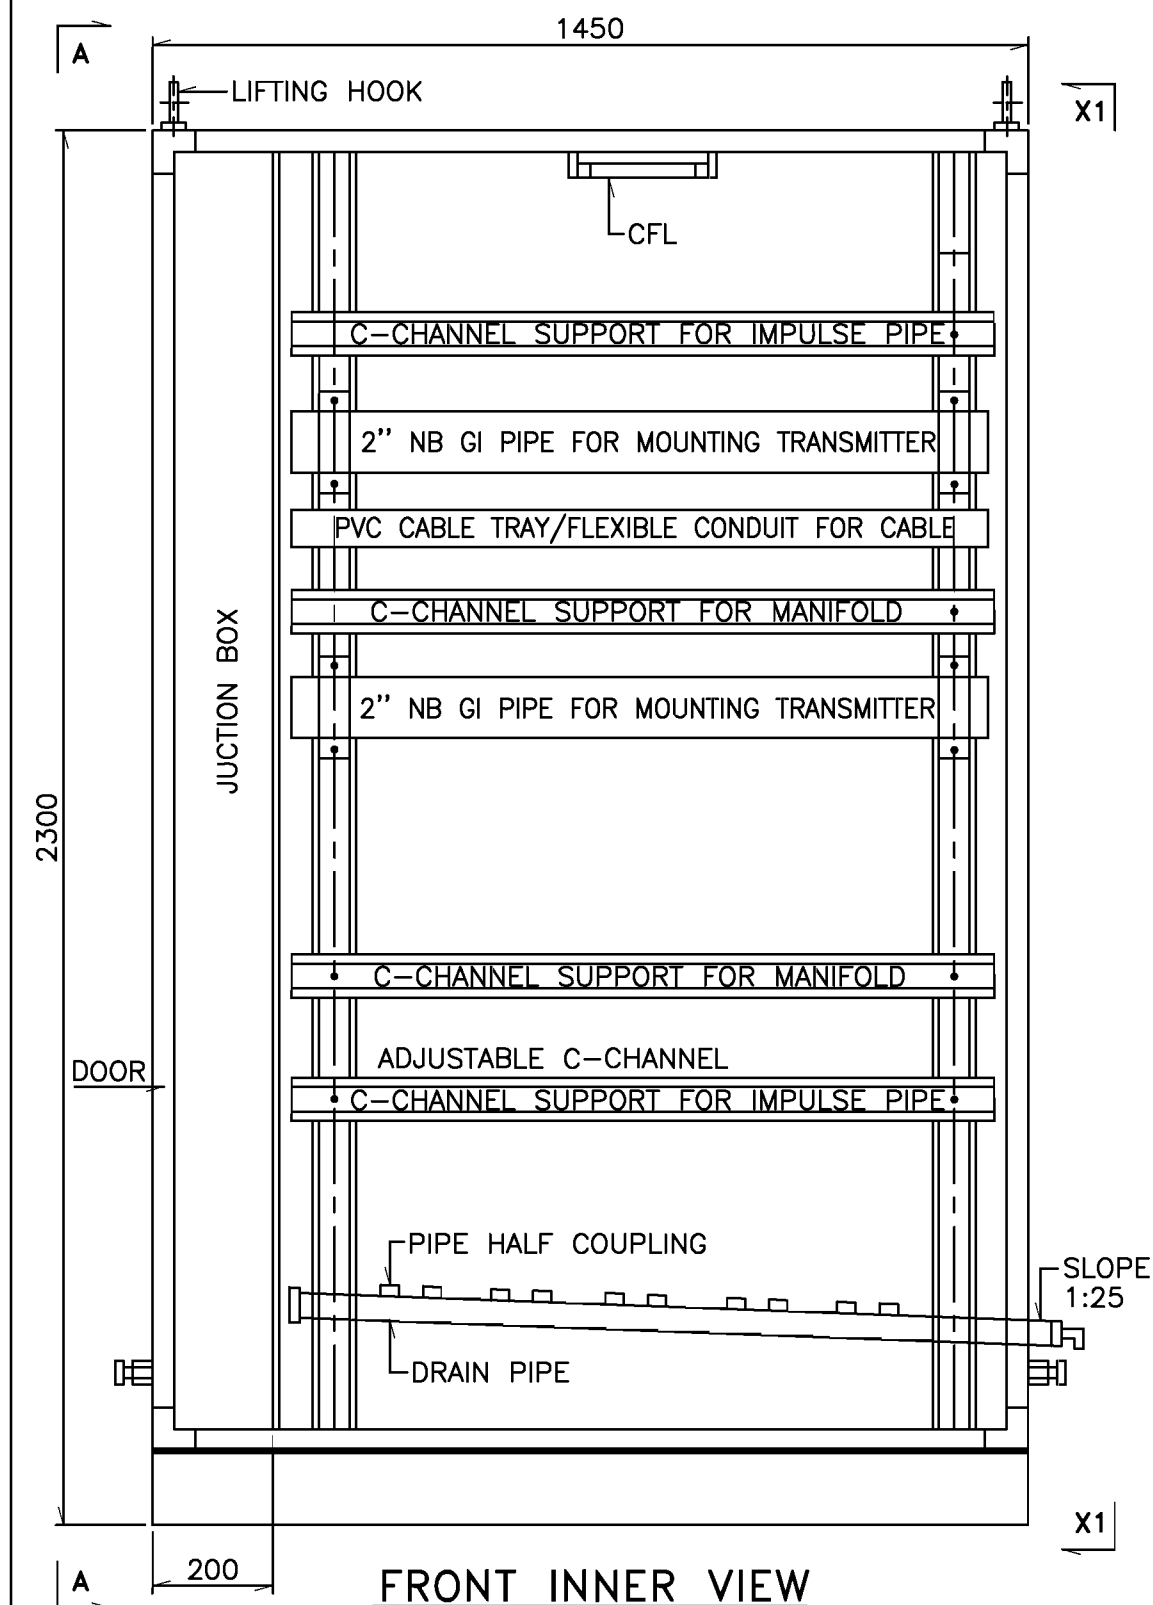

FRONT INNER VIEW

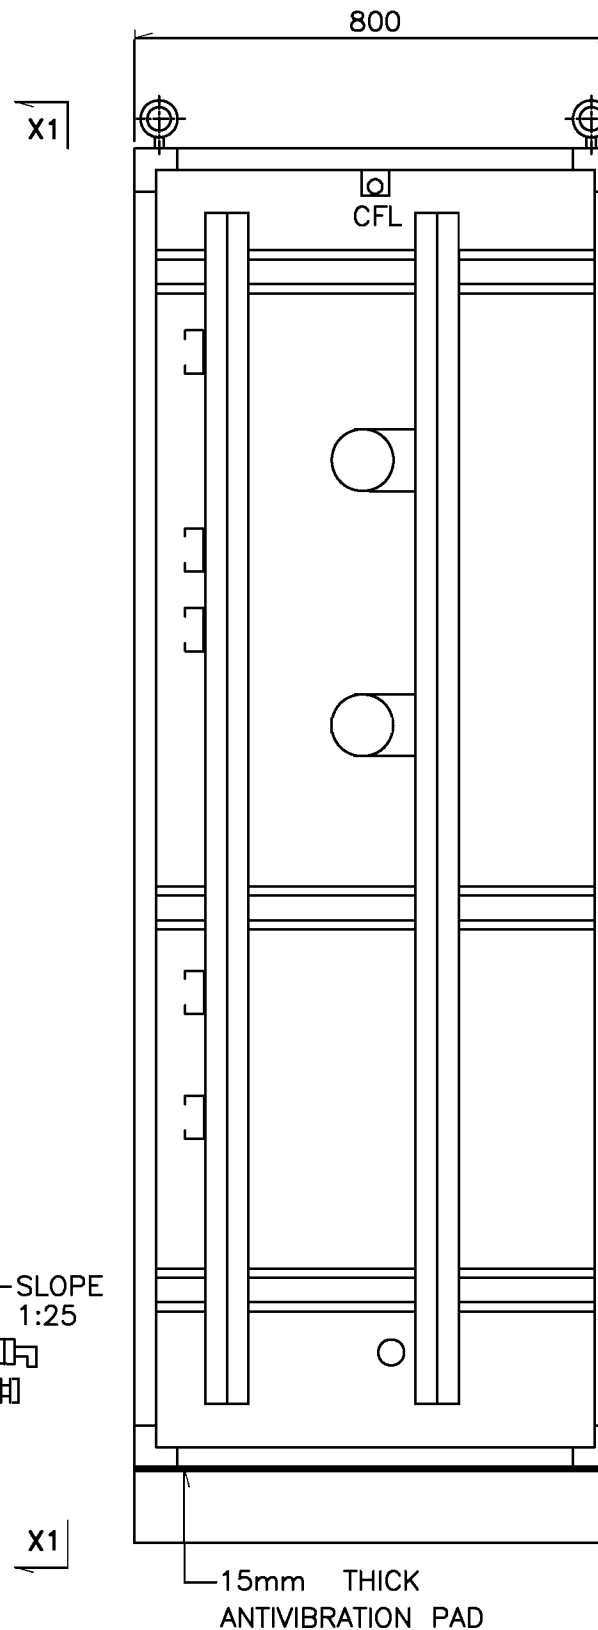

SIDE VIEW FROM X1-X1

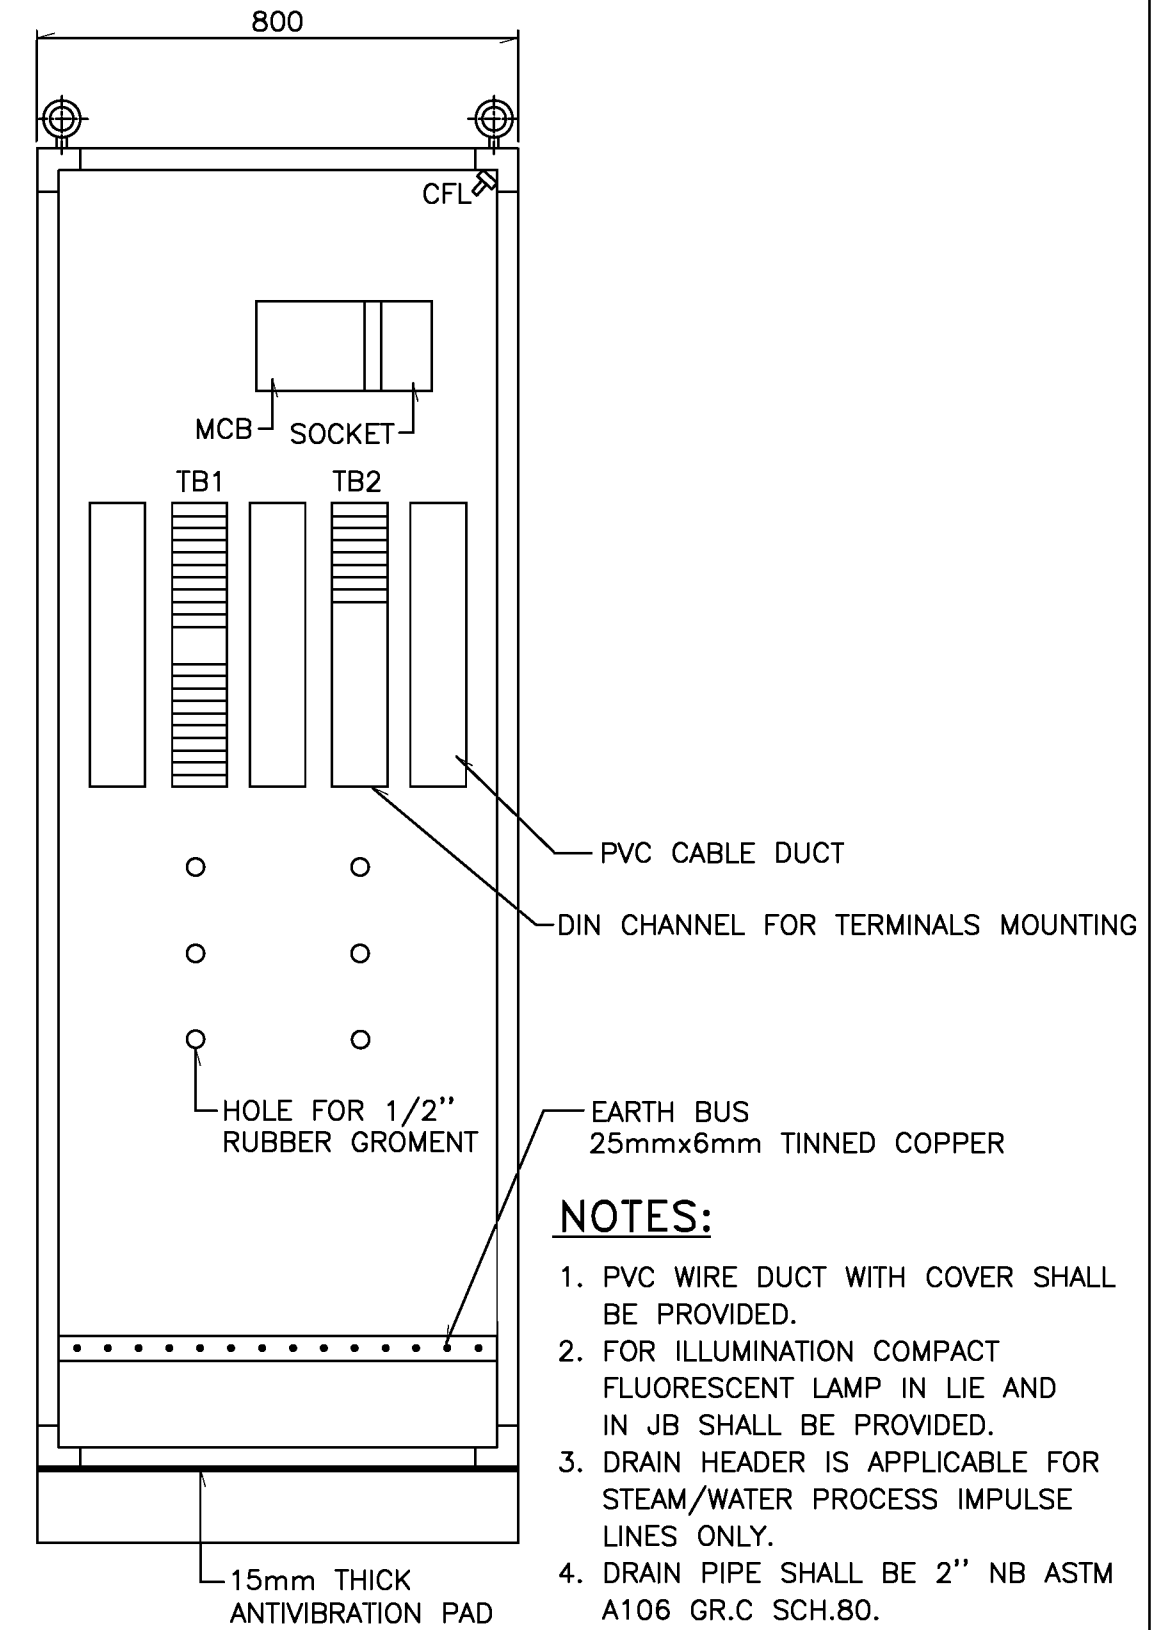

SIDE VIEW FROM A-A


- NOTES:

1. PVC WIRE DUCT WITH COVER SHALL BE PROVIDED.
2. FOR ILLUMINATION COMPACT FLUORESCENT LAMP IN LIE AND IN JB SHALL BE PROVIDED.
3. DRAIN HEADER IS APPLICABLE FOR STEAM/WATER PROCESS IMPULSE LINES ONLY.
4. DRAIN PIPE SHALL BE 2" NB ASTM A106 GR.C SCH.80.
5. ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED.


FOR BID PURPOSE ONLY

DO NOT SCALE


ISSUE	REVISIONS	BY	CLEARED					APPD	DATE	FOR RO ISSUE ONLY			 MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT	DO NOT SCALE				
			CHEM	CIVIL	ELEC	I&C	MECH			CLEARED				PROCON ENGINEERS (DIVISION OF NIMOTO CONSULTING ENGINEERS PVT.LTD.)				
										DEPT	SIGNATURE	DATE		SCALE ~	APPROVED	DATE(RO ISSUE)		
										CHEM					DR. INST.			DATE(CURRENT ISSUE)
										CIVIL					DR. P.N.Z.			
										ELEC					DR. D.J.P.	DWG.NO.	PE-189-IN-SK-8004 (SH. 7 OF 10)	ISSUE
										I&C								PO
										MECH								

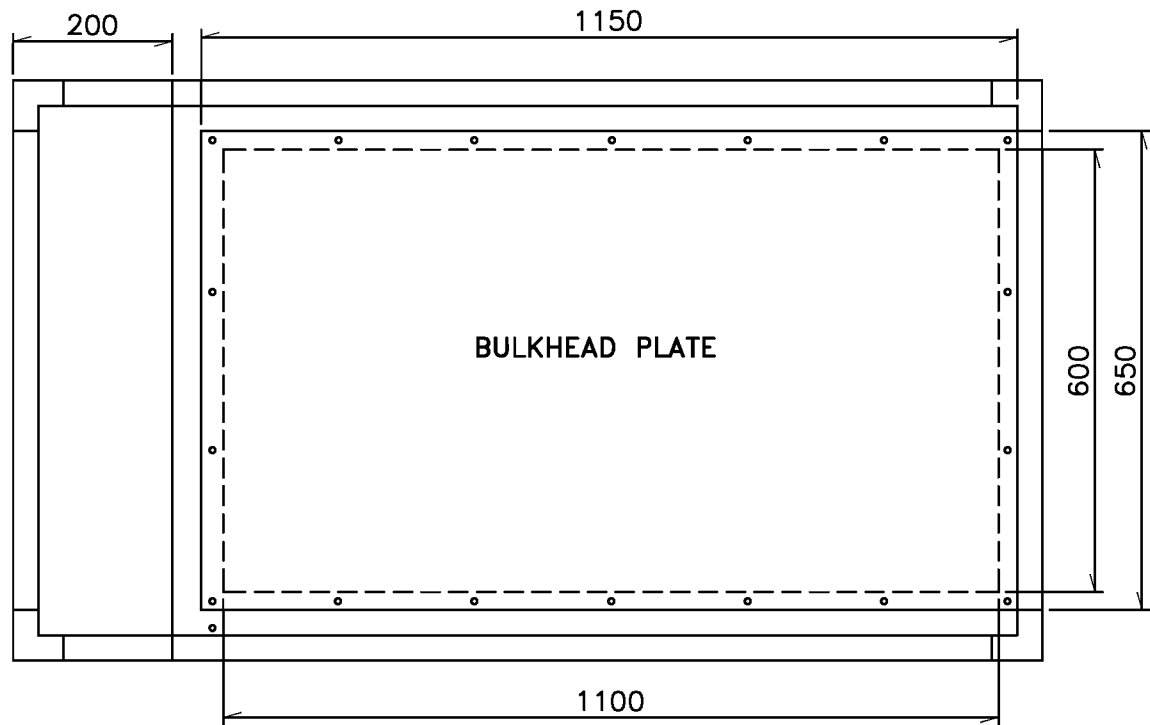

TOP VIEW

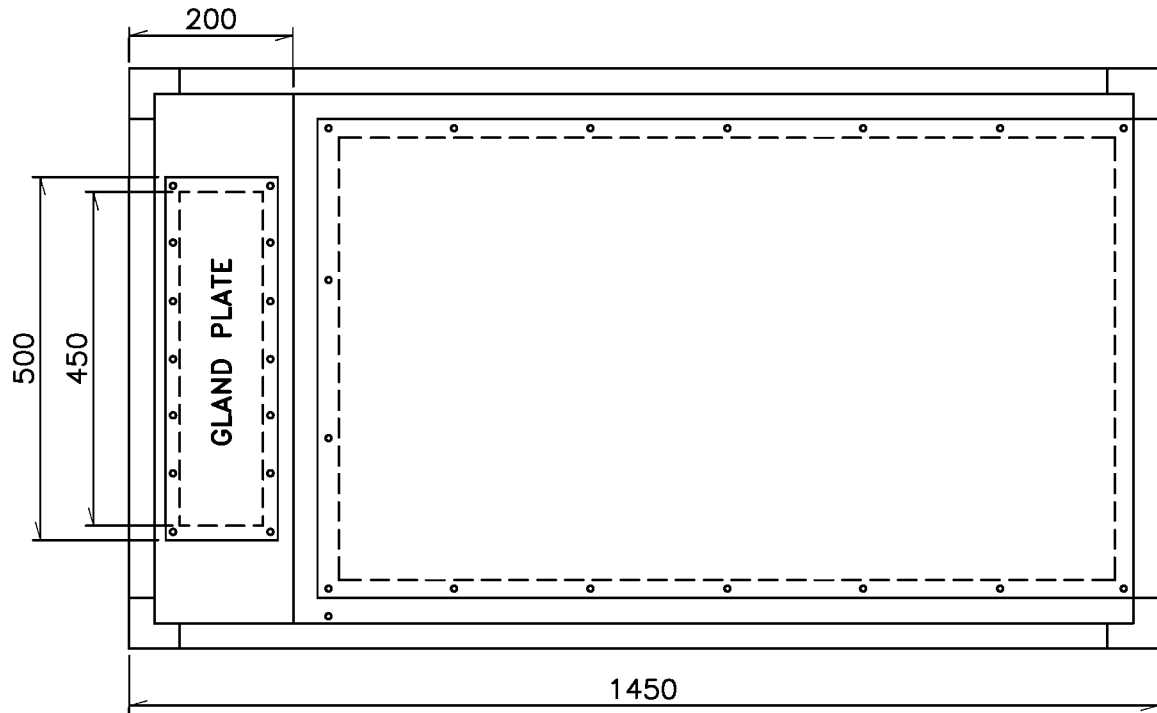

BOTTOM VIEW

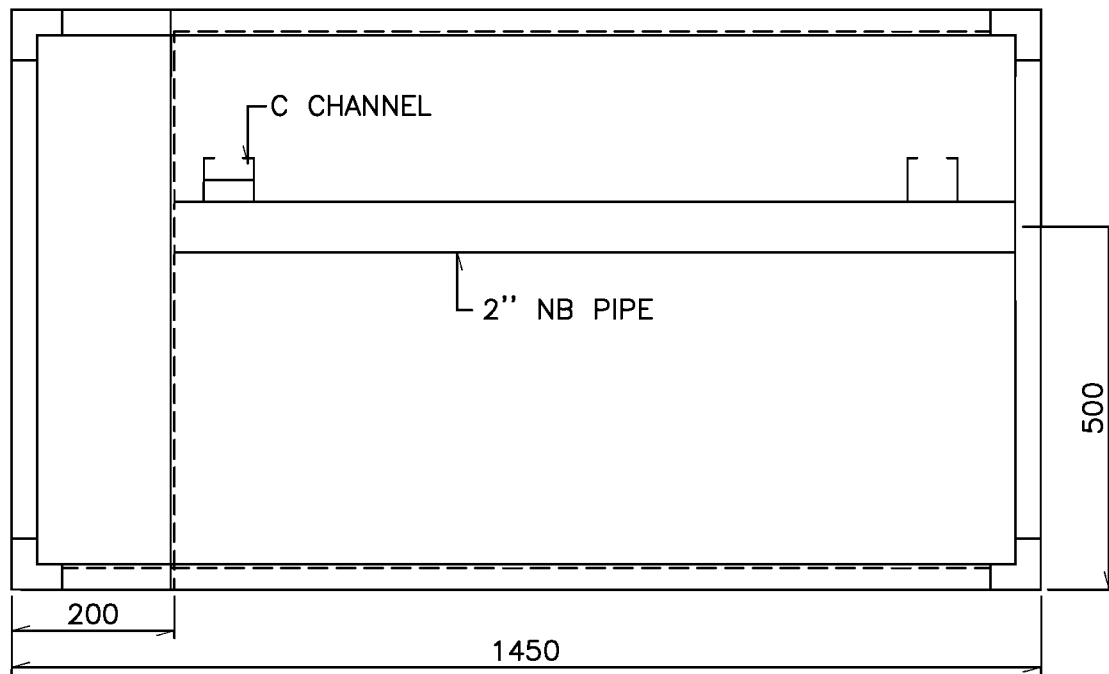

TOP VIEW WITHOUT BULKHEAD PLATE

NOTES:


- BULK HEAD PLATE DIMENSION ARE 1150 x 650 x 6.
- IMPULSE PIPE ENTRY: BOTTOM ENTRY FOR AIR/FLUE GAS APPLICATIONS.
- IMPULSE ENTRY: TOP ENTRY FOR STEAM/WATER APPLICATIONS.
- ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED.

FOR BID PURPOSE ONLY

DO NOT SCALE

ISSUE	REVISIONS	BY	CLEARED					APPD	DATE	FOR R0 ISSUE ONLY			"P" (PRELIMINARY) ISSUES ARE NOT TO BE USED FOR CONSTRUCTION / FABRICATION BUT ARE ISSUED FOR LIMITED PURPOSES ONLY AS INDICATED IN THE SMALL BLOCK AT THE TOP RIGHT HAND CORNER OF THE TITLE BLOCK. CONSTRUCTION / FABRICATION WORK IS PERMITTED ON "R" (RELEASED) ISSUES ONLY. INFORMATION CONTAINED WITHIN 'HOLD' IS NOT RELEASED FOR CONSTRUCTION / FABRICATION. FIELD MUST GET DESIGN OFFICE TO CLEAR 'HOLD' IN TIME BEFORE PROCEEDING WITH ANY CONSTRUCTION / FABRICATION WORK RELATED TO 'HOLD'. DRAWINGS SIGNED BY PROCON ENGINEERS' AUTHORISED REPRESENTATIVE ONLY ARE CONSIDERED VALID DRAWINGS.	MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT BULKHEAD DETAILS FOR LOCAL INSTRUMENT ENCLOSURE	PROCON ENGINEERS (DIVISION OF NIMOTO CONSULTING ENGINEERS PVT.LTD.)		
			CHEM	CIVIL	ELEC	I&C	MECH			DEPT	SIGNATURE	DATE			SCALE ~	APPROVED	DATE(R0 ISSUE)
										CHEM					DIV. INST.		DATE(CURRENT ISSUE)
										CIVIL					DR. P.N.Z.		23-08-2011
										ELEC					CH. D.J.P.	DWG.NO. PE-189-IN-SK-8004 (SH. 8 OF 10)	ISSUE
										I&C							P0
										MECH							

POWER WIRING CIRCUIT

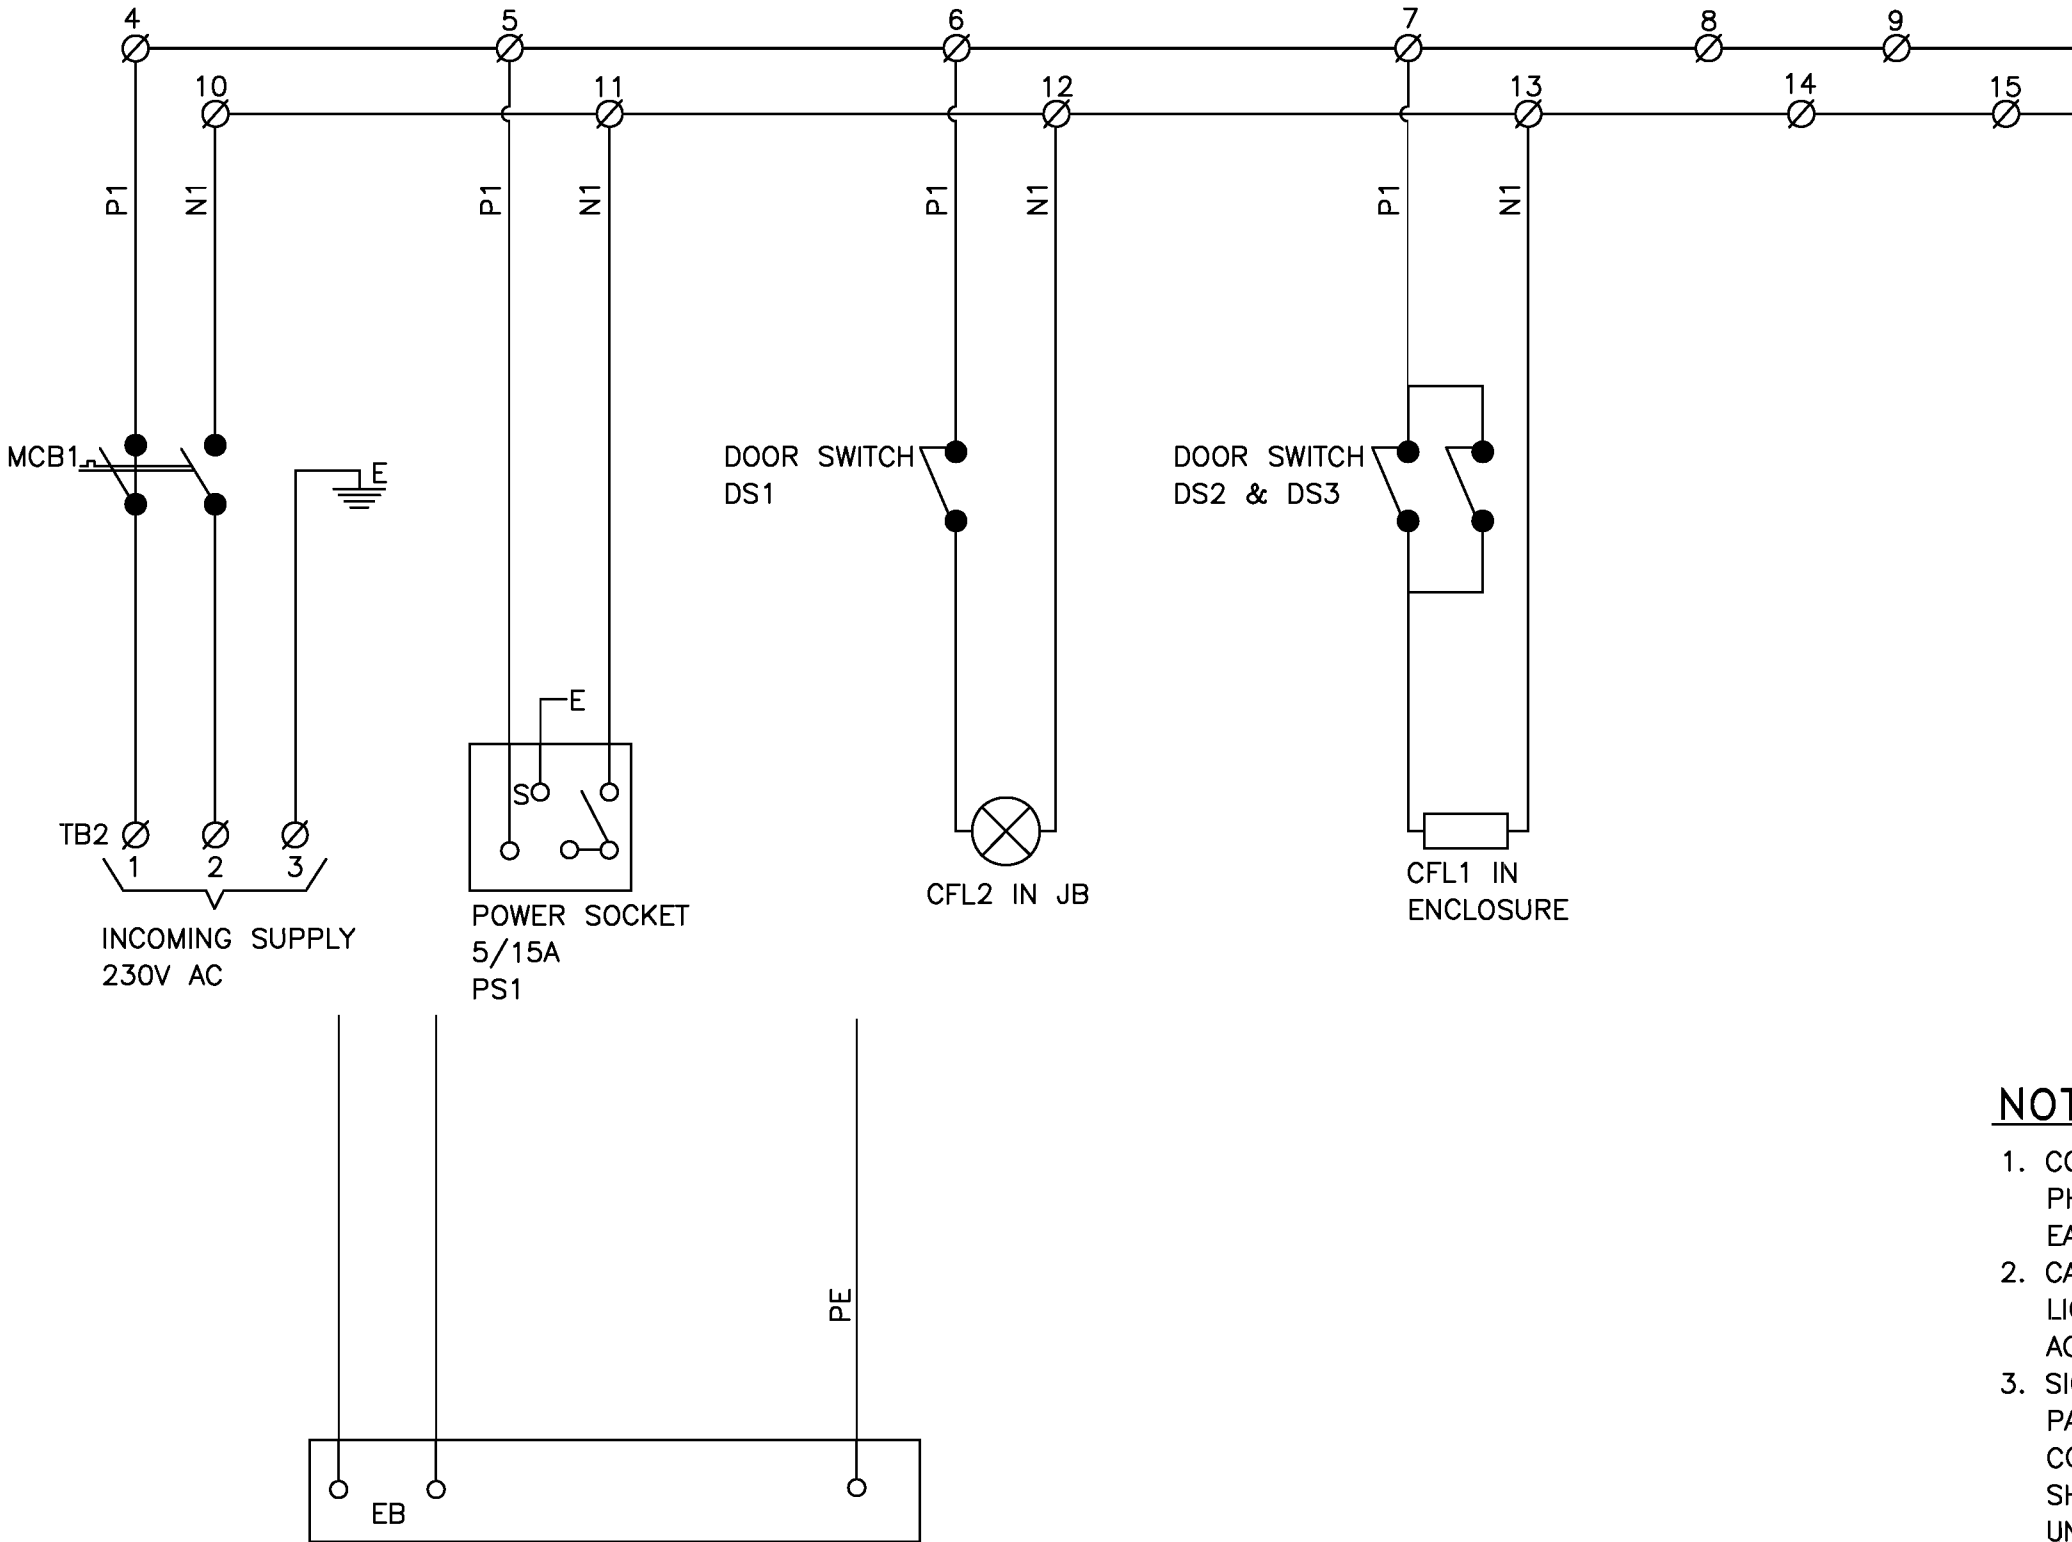


NOTES:

1. COLOR CODING FOR POWER SUPPLY:
PHASE-RED, NEUTRAL-BLACK AND
EARTH-GREEN.
2. CABLE ROUTING FROM TB TO PANEL
LIGHT WILL BE 1.5 sq.mm 1100V
AC GRADE.
3. SIGNAL WIRING WILL BE DONE BY 4
PAIR x 0.5 sq.mm ANNEALED TINNED
COPPER, PAIR TWISTED OVERALL &
SHIELDED, VOLTAGE GRADE 1100V,
UNARMoured FRLS PVC SHIELDED CABLE.

FOR BID PURPOSE ONLY

DO NOT SCALE

ISSUE	REVISIONS	BY	CLEARED					APPD	DATE	FOR RO ISSUE ONLY			MAHAGENCO MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT ELECTRICAL WIRING AND TERMINATION DRAWING FOR LOCAL INSTRUMENT ENCLOSURE	PROCON ENGINEERS (DIVISION OF NIMOTO CONSULTING ENGINEERS PVT.LTD.)				
			CHEM	CIVIL	ELEC	I&C	MECH			CLEARED				SCALE ~	APPROVED		DATE(RO ISSUE)	
										DEPT	SIGNATURE	DATE		DIV. INST.		DATE(CURRENT ISSUE)		
										CHEM				DR. P.N.Z.		23-08-2011		
										CIVIL				CH. D.J.P.	DWG.NO.	PE-189-IN-SK-8004	(SH. 9 OF 10)	ISSUE
										ELEC								PO
										I&C								
										MECH								

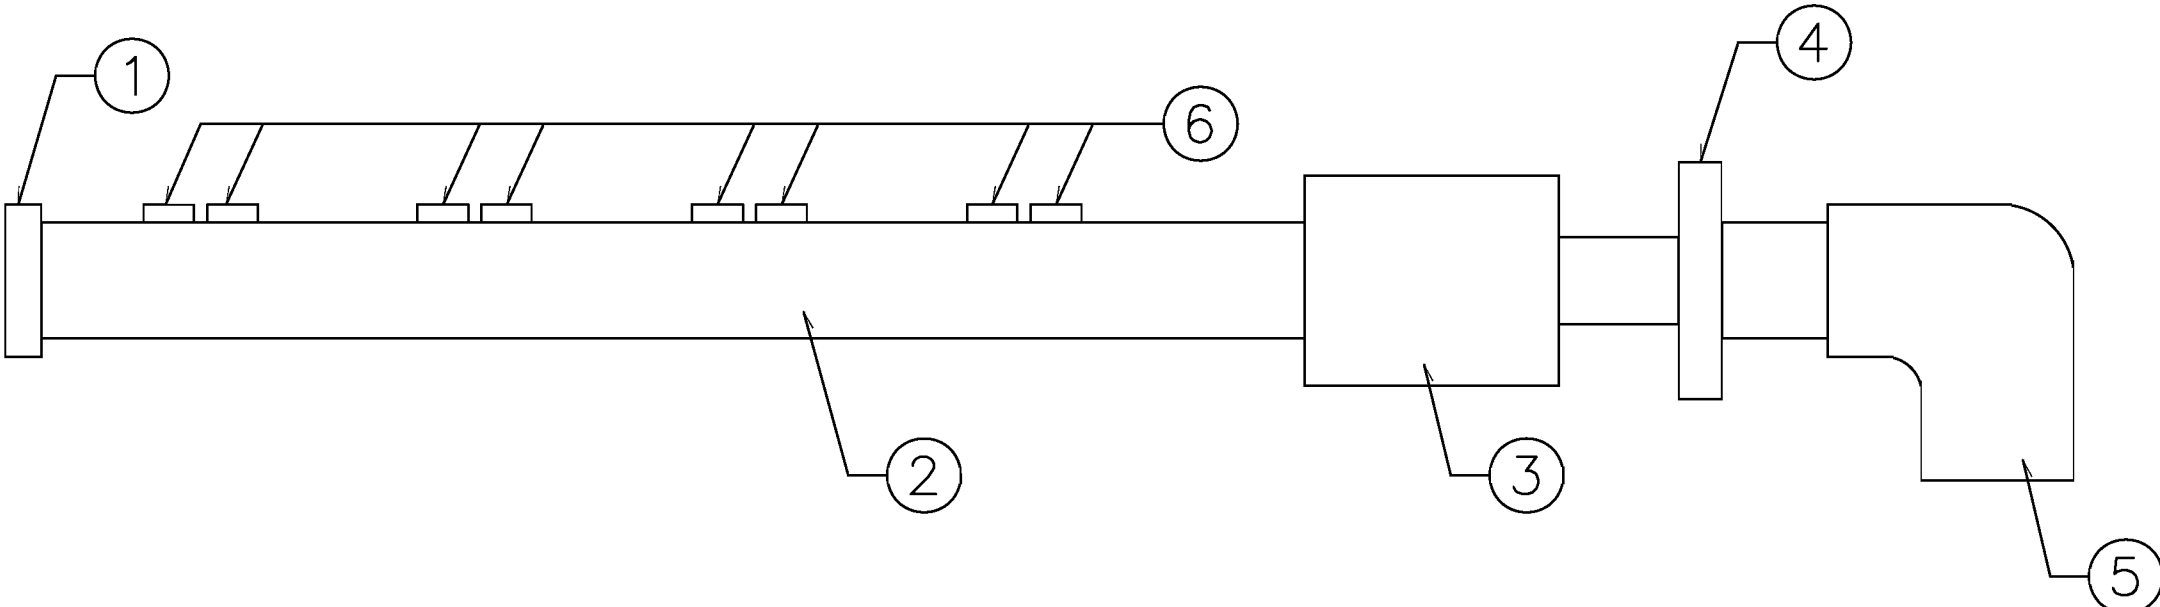

BILL OF MATERIAL		
SL. NO.	DESCRIPTION	QTY.
1	2" S.W. CAP, CS	1
2	2" NB, ASTM A-106, SCH 80/GR. C	1
3	2" SW x 1" NPT(F) COUPLING, CS	1
4	1" NPT(M) x 1" BSP(M) HEX. NIPPLE WITH FITTING, CS	1
5	1" BSP(F) ELBOW, CS (BOTH ENDS THREADED)	1
6	HALF COUPLING; SIZE; 1/2" NB SW	AS REQD.

FOR BID PURPOSE ONLY

															DO NOT SCALE									
ISSUE	REVISIONS					BY	CLEARED					APPD	DATE	FOR RO ISSUE ONLY			MAHAGENCO MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT DRAIN HEADER DETAIL FOR LOCAL INSTRUMENT ENCLOSURE	PROCON ENGINEERS (DIVISION OF NIMOTO CONSULTING ENGINEERS PVT.LTD.)						
							CHEM	CIVIL	ELEC	I&C	MECH			CLEARED										
							DEPT	SIGNATURE	DATE	SCALE ~				APPROVED		DATE(RO ISSUE)								
							CHEM											DATE(CURRENT ISSUE) 23-08-2011						
							CIVIL																	
							ELEC																	
							I&C													DWG.NO PE-189-IN-SK-8004		(SH. 10 OF 10)		ISSUE PO
							MECH																	

TYPICAL INSTRUMENT INSTALLATION DIAGRAM

FOR BID PURPOSE ONLY

DO NOT SCALE

DATE : 23-08-2011

ISSUE	BY	CH	DATE

PROCON ENGINEERS
(DIVISION OF NIMOTO CONSULTING ENGINEERS PVT. LTD.)

CLIENT : MAHARASHTRA STATE POWER GENERATION CO.LTD.

PROJECT : BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT

TYPICAL INSTRUMENT INSTALLATION DIAGRAM

SCALE ~

APPROVED

DIV INST.

DR P.N.Z.

CH D.J.P.


DWG.NO.PE-189-IN-SK-8003 (SH. 1 of 20) PD

NOTES:

1. PROVISION OF SINGLE OR DOUBLE ROOT VALVE AND DRAIN VALVE SHALL BE IN ACCORDANCE WITH THE PRESSURE/ TEMPERATURE REQUIREMENT. FOR LINE PRESSURE EQUAL TO OR GREATER THAN 40 KG/SQ. CM. 2 NOS ROOT VALVE AND 2 NOS DRAIN VALVE SHALL BE REQUIRED.
2. MATERIAL, SIZE AND RATING OF THE PROCESS HOOK UP ITEMS SHOWN IN THE DRAWING ARE INDICATIVE ONLY. ACTUAL REQUIREMENT SHALL BE AS PER PROCESS CONDITION AND SPECIFICATION OF CONTROL & INSTRUMENTATION.
3. DRAIN PIPE IN RACK AND ENCLOSURE SHALL BE 2" NB SCH 80.

				FOR BID PURPOSE ONLY	
				DO NOT SCALE	DATE : 23-08-2011
ISSUE	BY	CH	DATE	TYPICAL INSTRUMENT INSTALLATION DIAGRAM	
				PROCON ENGINEERS (DIVISION OF NIMOTO CONSULTING ENGINEERS PVT. LTD.)	
				SCALE ~	
				APPROVED	
				DIV INST.	
				DR P.N.Z.	
				CH D.J.P.	
				PROJECT : BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT	
				DWG.NO. PE-189-IN-SK-8003 (Sht. 2 of 20) PD	

PRESSURE TRANSMITTER/PRESSURE SWITCH
MOUNTED ABOVE SOURCE POINT

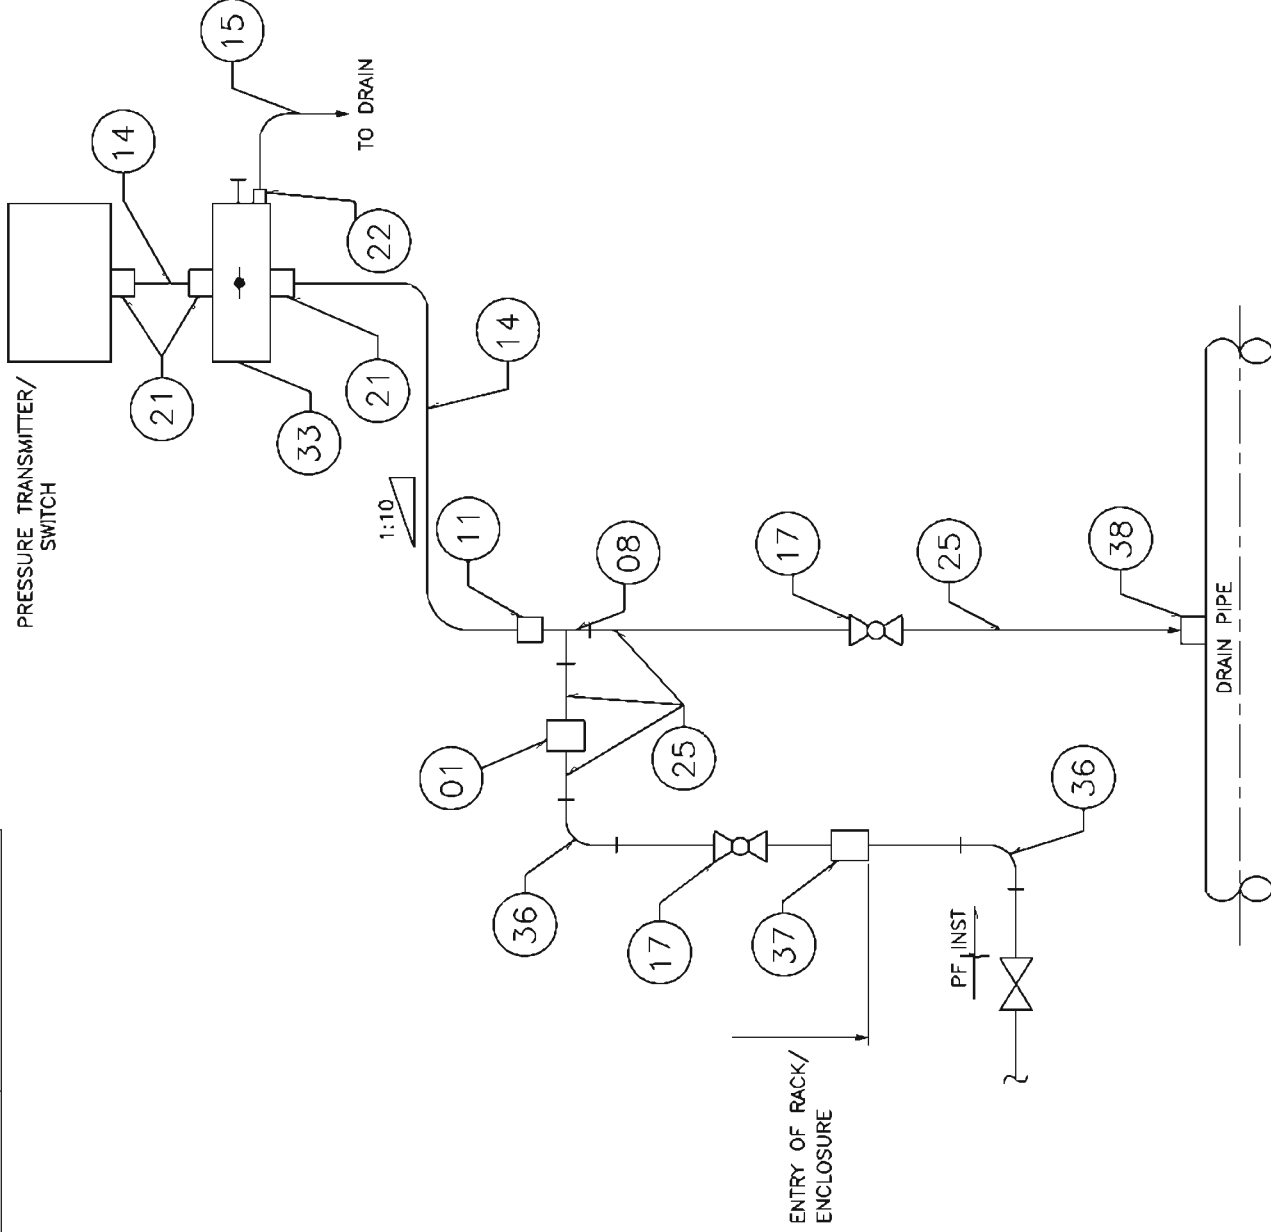


SERVICE : CONDENSER PRESSURE, INSTRUMENT AIR ETC.

BILL OF MATERIAL		
ITEM NO.	QTY./INST	DESCRIPTION
08	1	EQUAL TEE (FEMALE) 1/2" SW 3000lbs, CS/AS
11	1	MALE CONNECTOR 1/2" PE x 1/2" OD 3000 lbs OF CS/AS
17	2	GLOBE VALVE 1/2" SW 800lbs OF CS/AS
14	3 MTRS.	TUBE 1/2" OD, 2.1mm THICK, SS 316
21	3	MALE CONNECTOR 1/2" NPT(M) x 1/2" OD 3000 lbs, SS 316
25	15 MTRS.	IMPULSE PIPE 15 NB SCH 80, CS/AS
33	1	2 VALVES MANIFOLD 1/2" NPT(F), SS 316
01	1	FULL COUPLING 1/2" SW 3000lbs, CS/AS
15	0.15 MTRS.	TUBE 8mm OD, 1.0mm THK. SS 316
22	1	MALE CONNECTOR 1/4" NPT(M) x 8mm OD 3000 lbs
36	2	90° ELBOW 1/2" SW 3000lbs, CS/AS
37	1	BULKHEAD UNION/COUPLING CL:3000 lbs, 1/2" NB-SW, AS PER ANSI B16.11, CS/AS
38	1	HALF COUPLING CL:3000 lbs/ 1/2" NB-SW, AS PER ANSI B16.11, CS/AS

FOR BID PURPOSE ONLY

[illegible]

PRESSURE TRANSMITTER/PRESSURE SWITCH
MOUNTED BELOW SOURCE POINT

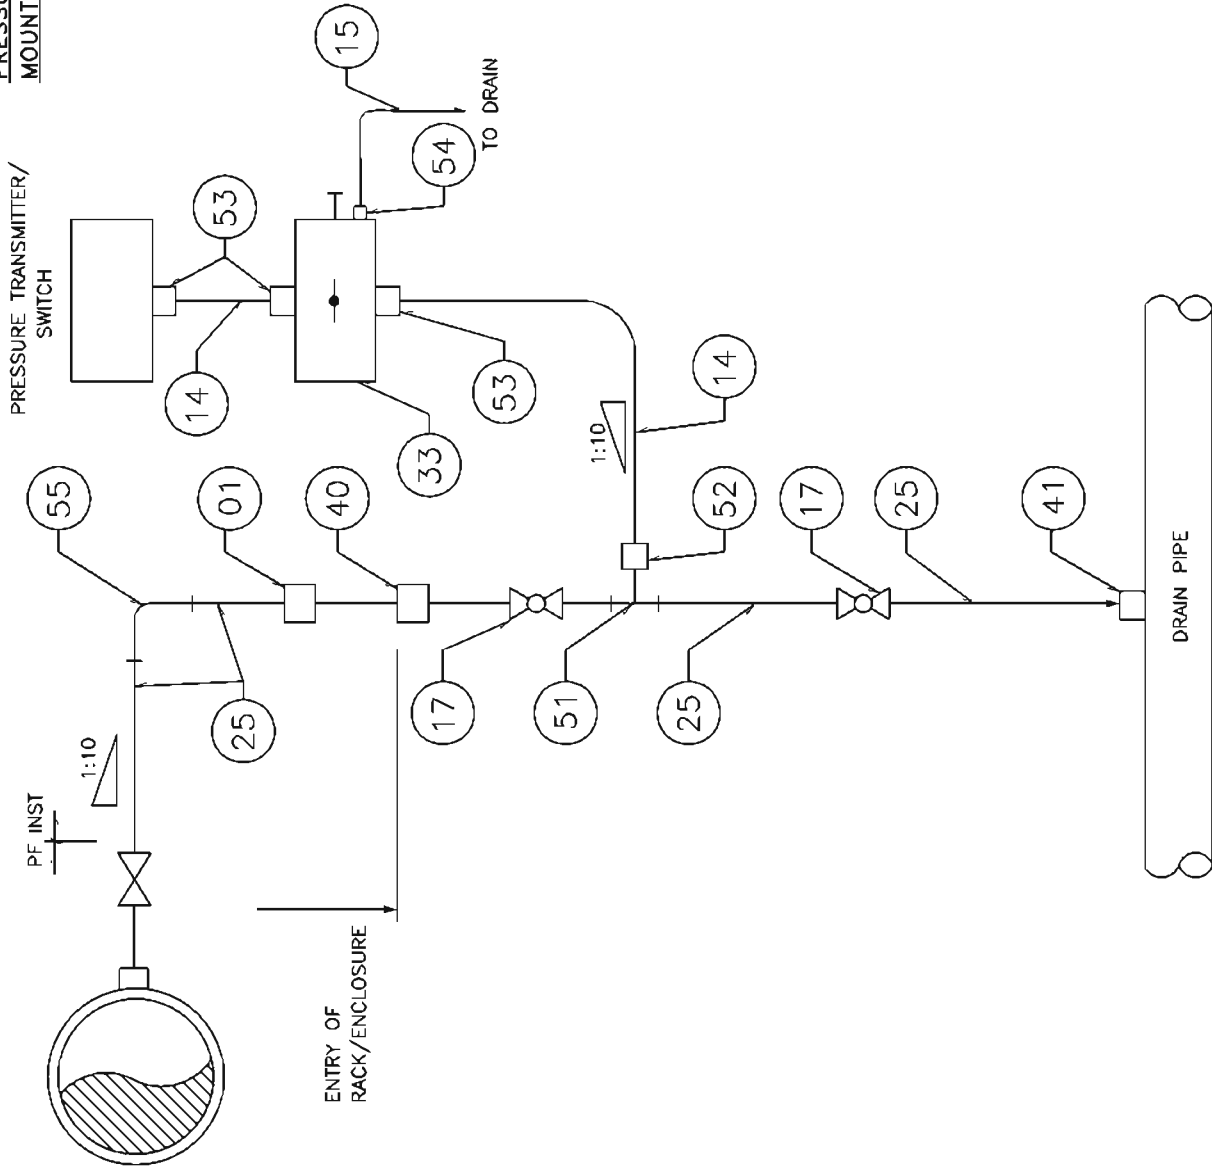


BILL OF MATERIAL		
ITEM NO.	QTY./ INST.	DESCRIPTION
51	1	EQUAL TEE (FEMALE) 1/2" SW 6000lbs, CS/AS
52	1	MALE CONNECTOR 1/2" PE x 1/2" OD 6000 lbs, CS/AS
17	2	GLOBE VALVES 1/2" SW 800lbs, CS/AS
14	3 MTRS.	TUBE 1/2" OD, 2.1mm THK, SS 316
53	3	MALE CONNECTOR 1/2" NPT(M) x 1/2" OD 6000 lbs, SS 316
25	15 MTRS.	IMPULSE PIPE 15 NB GR.B SCH 80, CS/AS
33	1	2 VALVES MANIFOLD 1/2" NPT(F), SS 316
01	1	FULL COUPLING 1/2" SW 6000lbs, CS/AS
15	0.15 MTRS.	TUBE 8mm OD, 1.0mm THK, SS 316
54	1	MALE CONNECTOR 1/4" NPT(M) x 8mm OD 6000 lbs, SS 316
55	2	90° ELBOW 1/2" SW 6000lbs, CS/AS
40	1	BULKHEAD UNION/COUPLING CL-6000 lbs, 1/2"NB-SW, AS PER ANSI B16.11, CS/AS
41	1	HALF COUPLING CL-6000 lbs, 1/2" NB-SW, AS PER ANSI B16.11, CS/AS

SERVICE : CONDENSATE, FEED WATER ETC.

FOR BID PURPOSE ONLY

DO NOT SCALE	
PROCON ENGINEERS (DIVISION OF MARGO CONSULTING ENGINEERS PVT.LTD.)	
SCALE ~	DATE (DD MM YY)
DNV. INST.	APPROVED
DNV. P.N.Z.	DATE (DD MM YY)
DNV. D.J.P.	DATE (DD MM YY)
MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT	
TYPICAL INSTRUMENT INSTALLATION DIAGRAM	
FOR RO ISSUE ONLY	
DEPT	CHECKED
CIVIL	SIGNATURE
ELEC	DATE
MECH	
ISSUE	REVISIONS
BY	CHECKED
DATE	APPROVED

TITLE	PE-189-IN-SK-8003 (SEE 10 OF 20)
TYPICAL INSTRUMENT INSTALLATION DIAGRAM	



BILL OF MATERIAL		
ITEM NO.	QTY./INST	DESCRIPTION
17	1	GLOBE VALVES 1/2" SW 800lbs, CS/AS
25	0.5 MTRS.	IMPULSE PIPE 15 NB SCH 80, CS/AS
32	1	PLUG 1/2" NPT(M) 3000lbs, CS/AS
10	2	EQUAL TEE (FEMALE) 1" SW 3000lbs, CS/AS
44	2 MTRS.	IMPULSE PIPE 25 NB SCH 80, CS/AS
64	1	REDUCER 1" SW x 1/2" SW 3000lbs, CS/AS
19	1	GLOBE VALVES 1" SW 800lbs, CS/AS
31	1	PLUG 1" NPT(F) 3000lbs, CS/AS
66	1	1" NB SCH 80 SW x 1" NPT(M) SEAMLESS NIPPLE 3000 lbs, CS/AS
03	1	15 NB SCH 80 SW x 1/2" NPT(M) SEAMLESS NIPPLE 3000lbs, CS/AS

FOR BID PURPOSE ONLY

[illegible]

BILL OF MATERIAL		
ITEM NO.	QTY./ INST	DESCRIPTION
27	15MTRS.	IMPULSE PIPE 3/4" NB, CS/AS.
26	A/R	GI PIPE, 1/2" NB.
09	2	FORGED UNEQUAL TEE AS PER ANSI B16:11 SIZE: 2 x 3/4" NB SW x 1/2" NPTF, CL 3000.
46	3	GALVANISED ELBOW CL 3000 SIZE: 1/2" NPTF.
20	1	QUICK DISCONNECTING FITTING MALE/END CONN. TO SUIT 1/2" OD CONN.
02	A/R	NYLON NOSE TO SUIT 1/2" END CONN. PR. TESTING 10 Kg/cm ² g.
14	A/R	SEAMLESS TUBE 1/2" OD, 2.1mm THICK, SS 316.
47	3	BULK HEAD COUPLING TO SUIT 1/2" OD TUBE & 1/2" NB PIPE, SS 316.
65	5	BALL VALVE 1/2" NPT(F), SS 316.
21	18	MALE CONNECTOR 1/2" NPT(M) x 1/2" OD 3000lbs, SS 316.
48	1	INSTRUMENT AIR HEADER 1" NB PIPE, SS 316.
64	1	EQUAL TEE, SS 316, TO SUIT 1/2" OD TUBE.
05	1	PR. GAUGE, 4" DIAL SIZE, RANGE 0-10 Kg/cm ² g CONNECTION 1/2" NPTM
06	1	3 WAY GAUGE COCK 1/2"NPTF x 1/2" OD.

FOR BID PURPOSE ONLY

ISSUE	BY	CH	DATE

PROCON ENGINEERS
(DIVISION OF NIMOTO CONSULTING ENGINEERS PVT. LTD.)

CLIENT : MAHARASHTRA STATE POWER GENERATION CO.LTD.
PROJECT : BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT

DO NOT SCALE

DATE : 23-08-2011

TYPICAL INSTRUMENT INSTALLATION DIAGRAM

SCALE ~

APPROVED

DIV INST.


DR P.N.Z.

CH D.J.P.

DWG.NO.PE-189-IN-SK-8003

(SHEET 16 OF 20)

PD

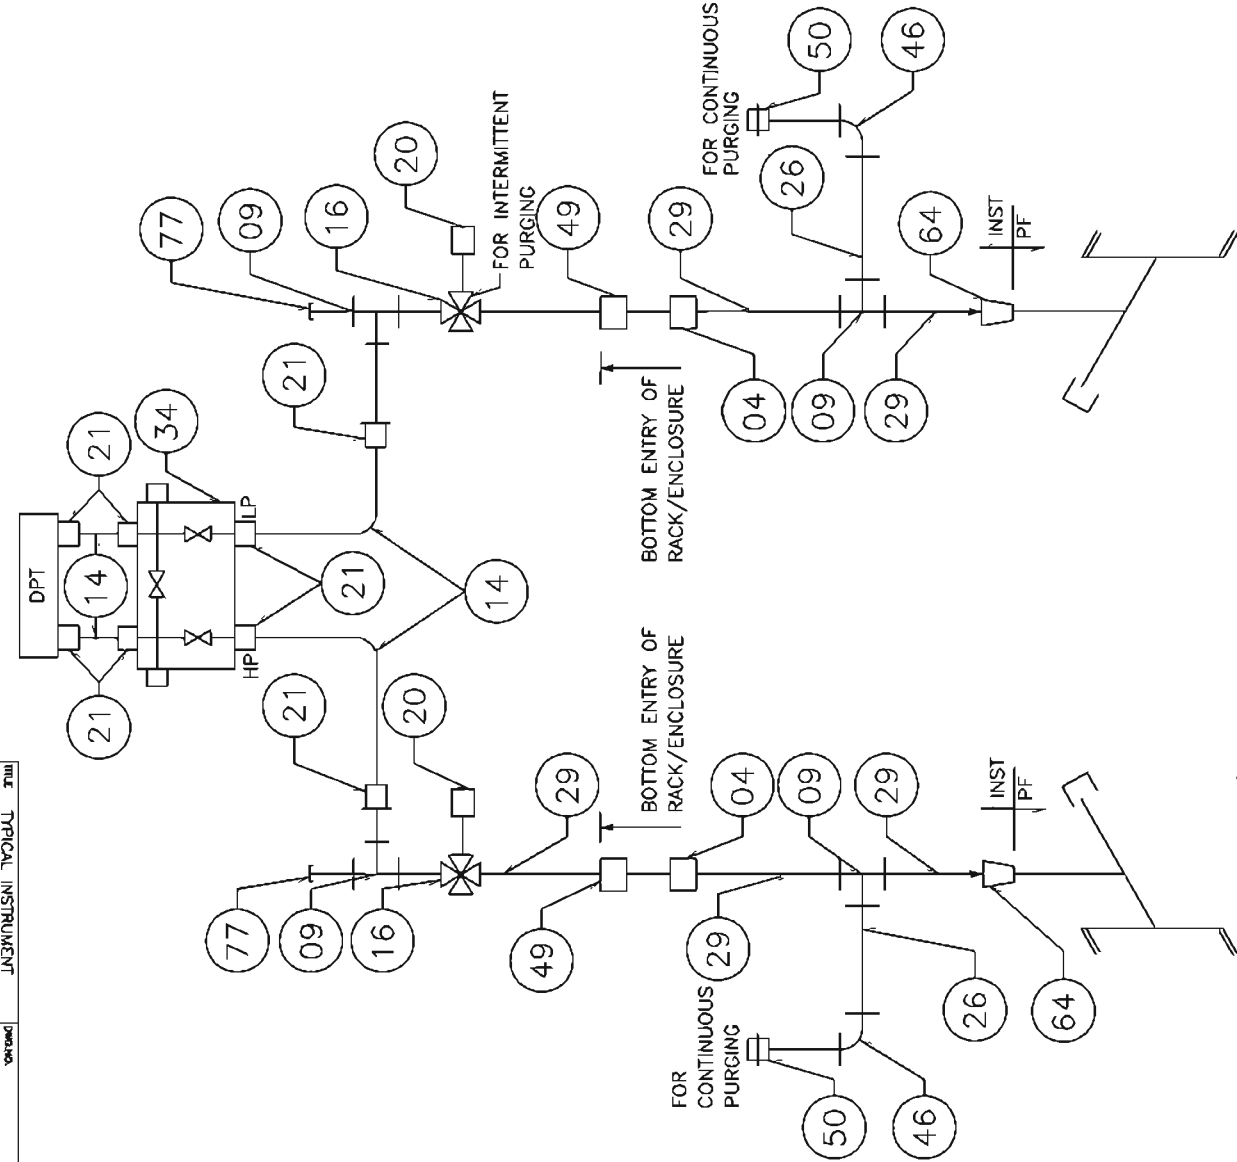

TYPICAL AIR PURGING SCHEME

BILL OF MATERIAL		
ITEM NO.	QTY./INST	DESCRIPTION
64	2	REDUCER 1" BSPF x 3/4" NB-SW CL 3000, CS/AS
04	2	FORGED COUPLING 3/4" SW CL 3000 AS PER ANSI B16.11
09	4	FORGED UNEQUAL TEE AS PER ANSI B16.11 SIZE : 2 x 3/4" NB-SW x 1/2" NPTF, CL 3000
77	2	NIPPLE & CAP 3/4" NB-SCH 80,CAP-3/4" NPTF
14	6 MTRS.	SEAMLESS TUBE 1/2" OD, x 2.1mm THK., SS 316
16	2	FOUR WAY VALVE SIZE: (2 x 3/4" NB-SW)x(2 x 1/2"NPTF) CL-800
20	2	QUICK DISCONNECTING FITTING SIZE: 1/2"NPTM
21	8	MALE CONNECTOR 1/2" NPT(M) x TO SUIT 1/2" OD TUBE, SS 316
29	30 MTRS.	SEAMLESS PIPE/3/4" NB SCH 80
26	A/R	PIPE AS PER IS-1239 SIZE: 1/2" NB-HEAVY GRADE
34	1	3 VALVE MANIFOLD 1/2" NPT(F), SS 316
46	2	GALVANISED ELBOW CL 3000 SIZE : 1/2" NPTF
49	2	BULK HEAD COUPLING CL 3000 SIZE : 3/4" NB SW, CL 3000, AS PER ANSI B16.11
50	2	BULK HEAD COUPLING CL 3000 SIZE : 1/2" NPTF, AS PER ANSI B16.11

SERVICE : FLUE GAS, FURNACE ETC.

FOR BID PURPOSE ONLY

FOR ISSUE ONLY				FOR BID PURPOSE ONLY			
BY	REVISIONS	CHECKED	DATE	APPROVED	DATE	DO NOT SCALE	
		CHEM					
		CIVIL					
		ELEC					
		MECH					
MAHARASHTRA STATE POWER GENERATION CO.LTD. BHUSAWAL T.P.S. UNIT-6 : 1 X 660 MW PROJECT				PROCON ENGINEERS (DIVISION OF MASTRO CONSULTING ENGINEERS PVT.LTD.)			
TYPICAL INSTRUMENT INSTALLATION DIAGRAM				SCALE : ~ DATE/REV ISSUED 23-08-2011			
				DWG. NO. : PE-189-IN-SK-8003 CHK. : D.J.P. DATE : 17/08/2011			

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: II
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1		Section – 11
REV: R0	MASTER SPECIFICATIONS		Page 525 of 555
4.0 <u>LIST OF APPROVED VENDORS – CONTROL & INSTRUMENTATION</u>			
<u>SR. NO.</u>	<u>NAME OF EQUIPMENT / ITEM</u>		<u>APPROVED VENDORS</u>
1.0	<u>FIELD / PRIMARY INSTRUMENTS:</u>		
1.1	RTD & THERMOCOUPLES	(a)	PYRO ELECTRIC INSTRUMENTS GOA PVT. LTD.
		(b)	GENERAL INSTRUMENTS CONSORTIUM, MUMBAI
		(c)	DETRIVE, MUMBAI
		(d)	TEMSSENS INSTRUMENTS(I) PVT. LTD, UDAIPU
1.2	SMART ELECTRONIC TRANSMITTERS (PRESSURE, DIFF. PRESSURE)	(a)	EMERSON PROCESS MANAGEMENT (I) LTD
		(b)	FUJI, JAPAN
		(c)	YOKOGAWA, JAPAN/ YOKOGAWA INDIA
		(d)	ABB, GERMANY / FARIDABAD
		(e)	HONEYWELL, USA / PUNE
1.3	DISPLACER TYPE LEVEL TRANSMITTER	(a)	CHEMTROL MIL
		(b)	DRESSER, COIMBTORE
		(c)	V-AUTOMAT, DELHI
		(d)	ECKARDT, GERMANY
1.4	LEVEL TRANSMITTERS (DISPLACEMENT TYPE)	(a)	DRESSER MASONIELAN, FRANCE (DRESSER VALVES INDIA LTD. COIMBATORE)
		(b)	CHEMTROLS, MUMBAI (ECKARDT, GERMANY)
		(c)	ECKARDT, GERMANY

CONSULTANT : PROCON ENGINEERS

 MAHARASHTRA STATE POWER GENERATION CO. LTD.	Volume: II	
	Section – 11	
REV: R0	MASTER SPECIFICATIONS	Page 526 of 555
<u>SR. NO.</u>	<u>NAME OF EQUIPMENT / ITEM</u>	<u>APPROVED VENDORS</u>
1.5	LEVEL TRANSMITTERS (ULTRASONIC TYPE)	(d) ENDRESS+HAUSER, GERMANY/INDIA
		(e) KROHNE, FRANCE
		(f) PEPPERL+FUCHS, GERMANY/INDIA
		(g) VEGA, GERMANY
		(h) KAB INSTRUMENTS LTD.
1.6	RADAR TYPE LEVEL TRANSMITTERS	(a) SIEMENS MILLTRONICS
		(b) ENDRESS & HAUSER
		(c) SBEM
		(d) EMERSON
		(e) AMETEKEDREXELBRROK (CHEMTROLS)
1.7	TEMPERATURE TRANSMITTERS	(a) EMERSON PROCESS (FORMERLY FISHER ROSEMOUNT), USA/DAMAN
		(b) ABB, GERMANY / FARIDABAD
		(c) FUJI, JAPAN
		(d) HONEYWELL, USA / PUNE
		(e) YOKOGAWA, JAPAN/ YOKOGAWA INDIA
		(f) MOORE, USA
1.8	MAGNETIC LEVEL SWITCHES	(a) LEVCON INSTRUMENTS PVT. LTD., KOLKATA
		(b) V.AUTOMAT, NEW DELHI
		(c) ASIAN INDUSTRIAL VALVES, CHENNAI
1.9	LEVEL SWITCHES CONDUCTIVITY TYPE	(a) BHARAT HEAVY ELECTRICALS LTD.
		(b) YARWAY, USA

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: II
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1		Section – 11
REV: R0	MASTER SPECIFICATIONS		Page 527 of 555
<u>SR. NO.</u>	<u>NAME OF EQUIPMENT / ITEM</u>		<u>APPROVED VENDORS</u>
		(c)	LEVELSTATE, UK
		(d)	SOLARTON, UK (PRESENTLY CALLED AS MOBREY)
		(e)	CHEMTROL
		(f)	LEVEL STATE (HITECH SYSTEMS)
		(g)	MOBREY
1.10	FLOW SWITCHES	(a)	SWITZER, CHENNAI
		(b)	KRONHE MARSHALL
		(c)	GENERAL INSTRUMENTS MUMBAI
		(d)	CHEMTROL
1.11	BYPASS ROTAMETER	(a)	IEPL, HYDERABAD
		(b)	PLACKA INSTRUMENTS INDIA PVT. LTD., CHENNAI
		(c)	TRAC, HYDERABAD
		(d)	EUREKA, PUNE
1.12	ROTAMETER	(a)	INSTRUMENTATION ENGINEERS PVT. LTD.
		(b)	SIGMA INSTRUMENTS CO.
		(c)	EUREKA INDUSTRIAL EQPT. PVT. LTD.
		(d)	TELACE EQUIPMENT PVT. LTD.
1.13	FLOW INTEGRATOR (ELECTRONIC TYPE)	(a)	ABB, GERMANY / FARIDABAD
		(b)	MASIBUS, GANDHINAGAR
		(c)	YOKOGAWA, JAPAN/ YOKOGAWA INDIA
		(d)	LEKKTROTEK, PUNE
		(e)	EMERSON

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: II
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1		Section – 11
REV: R0	MASTER SPECIFICATIONS		Page 528 of 555
<u>SR. NO.</u>	<u>NAME OF EQUIPMENT / ITEM</u>		<u>APPROVED VENDORS</u>
		(f)	ENDRESS & HAUSER
		(g)	FORBES MARSHALL
1.14	GAUGES (PRESSURE, DIFF. PRESSURE)	(a)	A N INSTRUMENTS PVT. LTD., KOLKATA
		(b)	GENERAL INSTRUMENTS CONSORTIUM, GOA/ MUMBAI
		(c)	GOA THERMOSTATIC INSTRUMENTS, GOA
		(d)	FORBES MARSHALL LTD., HYDERABAD
		(e)	WAAREE INDUSTRIES, MUMBAI
		(f)	H.GURU INSTRUMENTS (SOUTH INDIA), BANGALORE
		(g)	WIKA INSTRUMENTS INDIA PVT. LTD., PUNE
		(h)	GOA INSTRUMENTS PVT. LTD.,
		(i)	MONOMETER, MUMBAI
		(j)	BELLS CONTROLS LTD., KOLKATA
		(k)	SWITZER INSTRUMENTS LTD., CHENNAI
		(l)	WIKA ALEXANDER WIEGAND GMBH&CO., GERMANY
		(m)	BUDENBURG GUAGE CO. LTD
		(n)	INSTRUMENTATION PVT. LTD., BANGALORE
		(o)	INDOSONIC INSTRUMENT, MUMBAI
		(p)	PRECISION
		(q)	ASHCROFT

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: II
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1		Section – 11
REV: R0	MASTER SPECIFICATIONS		Page 529 of 555
<u>SR. NO.</u>	<u>NAME OF EQUIPMENT / ITEM</u>		<u>APPROVED VENDORS</u>
1.15	TEMPERATURE GAUGE	(a)	GOA THERMOSTATIC INSTRUMENTS, GOA
		(b)	GENERAL INSTRUMENTS CONSORTIUM,
		(c)	A.N. INSTRUMENTS PVT. LTD., KOLKATA
		(d)	H. GURU INSTRUMENTS (SOUTH INDIA), BANGALORE
		(e)	FORBES MARSHALL, HYDERABAD
		(f)	WIKI INSTRUMENTS INDIA PVT. LTD., PUNE
		(g)	WAREE, DADRA GOA INSTRUMENTS PVT. LTD.,
		(h)	BELLS CONTROLS LTD., KOLKATA
		(i)	SWITZER INSTRUMENTS LTD., CHENNAI
		(j)	WIKI ALEXANDER WIEGAND GMBH&CO., GERMANY
		(k)	BUDENBURG GAUGE CO. LTD.
		(l)	INDOSONIC INSTRUMENT, MUMBAI
1.16	SWITCHES (PRESSURE, DIFF. PRESSURE)	(a)	INDFOSS INDUSTRIES LTD., GHAZIABAD
		(b)	SWITZER INSTRUMENTS COMPANY, CHENNAI
		(c)	SOR INC., USA
		(d)	PYROELECTRIC, GOA
		(e)	DRESSER INDUSTRIES INC, USA
		(f)	REGULATEURS GEORGIN, FRANCE

CONSULTANT : PROCON ENGINEERS

 MAHAGENCO Maharashtra State Power Generation Co. Ltd.	MAHARASHTRA STATE POWER GENERATION CO. LTD.		Volume: II
	BID SPECIFICATION NO.: DG/BSL U-6/2011/T-1		Section – 11
REV: R0	MASTER SPECIFICATIONS		Page 530 of 555
<u>SR. NO.</u>	<u>NAME OF EQUIPMENT / ITEM</u>		<u>APPROVED VENDORS</u>
		(g)	DELTA CONTROLS LTD., U.K.
		(h)	KDG INSTRUMENTS LTD. U.K.
		(i)	ASHCROFT
		(j)	DWAYER, USA
		(k)	GENERAL INSTRUMENTS CONSORTIUM
1.17	TEMPERATURE SWITCH	(a)	INDFOSS INDUSTRIES LTD., GHAZIABAD
		(b)	SWITZER INSTRUMENTS COMPANY, CHENNAI
		(c)	GENERAL INSTRUMENTS CONSORTIUM, MUMBAI
		(d)	SOR INC., USA
		(e)	PYROELECTRIC, GOA DRESSER INDUSTRIES INC, USA
		(f)	REGULATEURS GEORGIN, FRANCE
		(g)	DELTA CONTROLS LTD., U.K.
		(h)	KDG INSTRUMENTS LTD. U.K.
1.18	AIR FILTER REGULATOR	(a)	PLACKA, CHENNAI
		(b)	SHAVO NORGREN, INDIA
1.19	MASS FLOW METER (CORROLIOUS PRINCIPLE)	(a)	EMERSON PROCESS MANAGEMENT (I) LTD
		(b)	ABB
		(c)	YOKOGAWA
		(d)	ENDRESS+ HAUESER
		(e)	GE SENSING & INSPECTION TECHNOLOGIES
		(f)	FORBES MARSHALL

CONSULTANT : PROCON ENGINEERS