
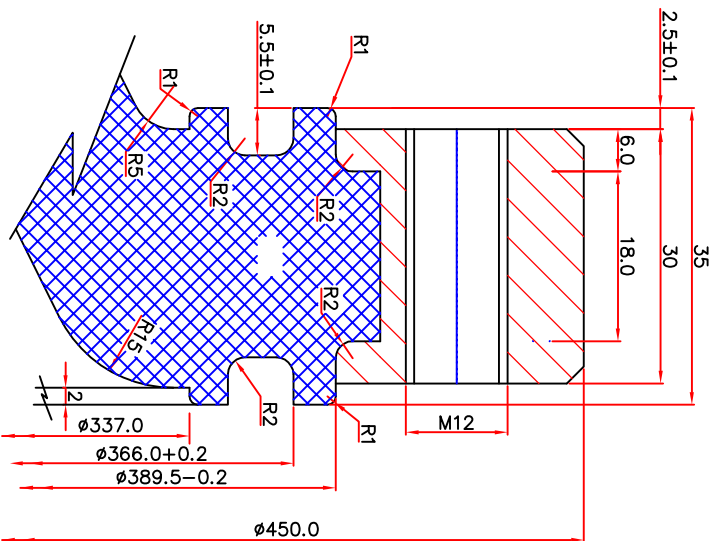
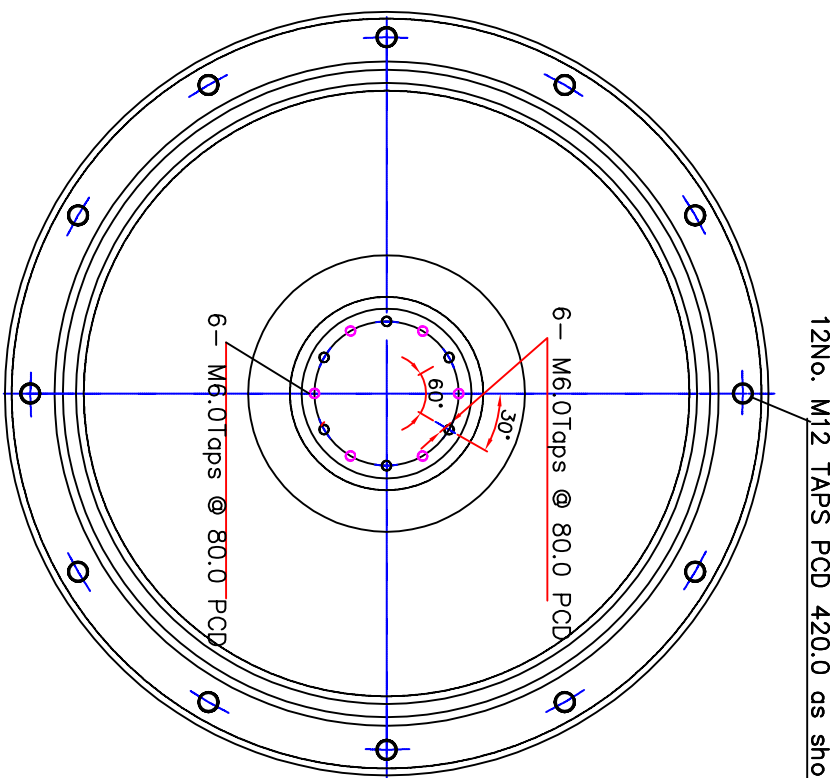


INVENTORY NO.	SIGN. AND DATE	REF. DRG. NO.
---------------	----------------	---------------

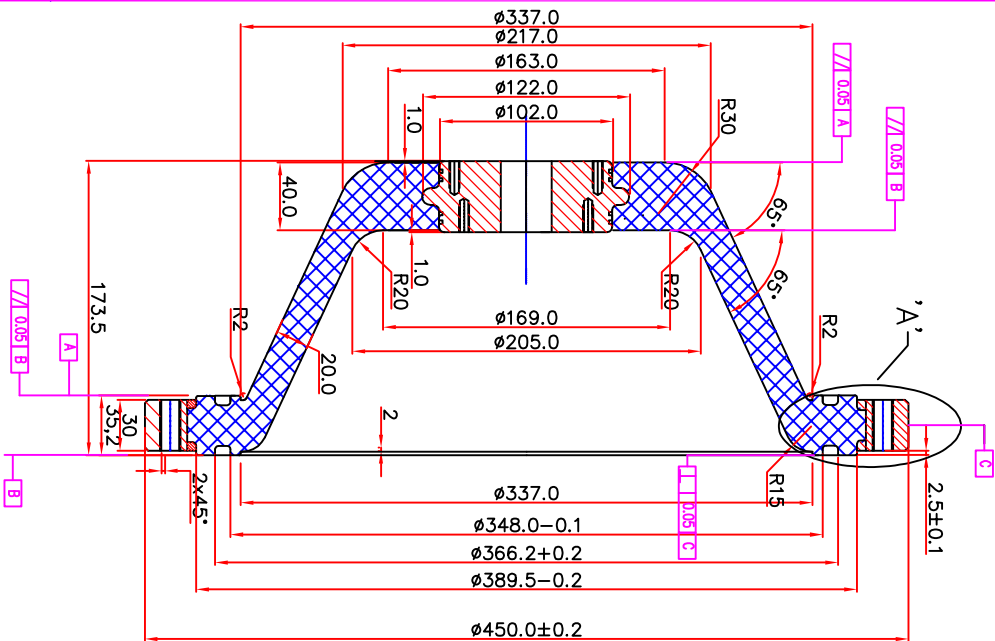

ENLARGED VIEW 'A'

1. MOULD INNER SURFACE SHALL BE GROUNDED TO RAO.6
2. MOULD INNER SURFACE SHALL BE PLATED SUITABLY FOR SMOOTH SURFACE OF INSULATORS
3. FINISHED INSULATOR SHALL BE IN ITS NATURAL COLOUR.
4. O-RING GROOVE DIMENSIONS SHALL BE AS PER DRAWING
5. INSULATOR SHALL BE PROCESSED SUCH THAT THERE SHALL BE NO GAS LEAKAGE THROUGH LT AND HT INSERTS.

VAR. NO.	ITEM NO.	DESCRIPTION	STD	DRAWING NO.	T.N.O.	MATL. CODE	A	UNIT WT.	GS
					VAR	MATL. SPECN.	C	QTY.	ZONE
	03	EPOXY BODY		RDDG43505170023		EPOXY BODY		01	
	02	LT INSERT		RDDG43505170021		HE-30		01	
	01	HT INSERT		RDDG43505170022A		HE30		01	
VAR.00		REMARKS							

REV.	DATE	ALTERED	REV.	DATE
		CHECKED		

TYPE OF PRODUCT		NAME OF CUSTOMER		DATE		NO. OF SHEETS	
CONE INSULATOR ASSY		GSM-245		25.04.13		1	
BRARAT HEAVY ELECTRICALS LTD.		BHOPAL		25.04.13		01	
DPT.		SCALE		WGT(KG)		REV. TO	
CODE		NTS		APPD		REV. NO.	
TITLE		SHEET NO.		NO. OF SHEETS		REV.	
DRAWING NO.		RDDG435-0517-0001		RDDG435-0517-0024A		1	
SHEET NO.		NO. OF SHEETS		NO. OF SHEETS		NO. OF SHEETS	