

REQUEST FOR QUOTATION

 MMI:PU:RF:003	BHARAT HEAVY ELECTRICALS LIMITED Electronics Division PB No. 2606, Mysore Road Bangalore - 560026 INDIA	RFQ NUMBER: UPK0000980 RFQ DATE : 04.FEB.2017	Due Date 15.FEB.2017 Time: 13:00 HRS VENUE : NEW ENGG. BLDG
--	---	--	--

PURCHASE FILE COPY e-Tender Bids shall be submitted through e-Procurement portal https://bheleps.buyjunction.in of M/s. Mjunction Services Limited	(for all correspondence) Purchase Executive : UPENDER KUMAR Phone : 2698 9572 Fax : 00918026742498 E-mail: upender@bheledn.co.in
--	---

Sl No.	Description	Qty	Unit	Delivery qty	Delivery Date
1	PS0679066985 Supply of MC4 connectors, cable ties, SMB mounting structure, HDPE pipes, cable lugs, hardware, cable trays, cable tray supports as per clauses 5.5 to 5.15 of PS-439-1097 Test Certificate	1	ST	1	15.MAR.2017
2	PS0679066993 Supply of Auxiliary power cables, control cables, data communication cables, 33KV termination kits, lugs and glands as per clauses 5.18, 5.19, 5.25, 5.30 to 5.31 of PS-439-1097 Test Certificate	1	ST	1	15.MAR.2017
3	PS0679067000 Supply of switchyard equipment such as auxiliary transformer, 33KV lightning arresters, metering CTs, metering PTs, metering panels with ABT meters, GOS isolators, PSC poles, insulators, ACSR conductor required for four pole and two pole structures, items of switch yard fencing (fence, gate, angles), items for connecting to earthing, with all related miscellaneous accessories and hardware as per clauses 5.17, 5.24 and 5.26 of PS-439-1097 Test Certificate	1	ST	1	15.MAR.2017
4	PS0679067019 Supply of ACDB, IRDB, Battery banks, FCBC, UPS with battery, Weather Monitoring System as per the clauses 5.20 to 5.23 of ps-439-1097 Test Certificate	1	ST	1	15.MAR.2017
5	PS0679067027 Supply of items of earthing system for solar array field, control room, inverter room panels and switch yard equipment including Earthing electrodes, GI flats, copper strips, copper earthing cables (green) of min 25sq mm, CPVC pipes, Insulation bushes, heat shrinkable sleeves for control room copper strip earthing and all related miscellaneous hardware as per clauses 5.32 to 5.34 of ps-439-1097 Test Certificate	1	ST	1	15.MAR.2017
6	PS0679067035 Supply of lightning arrestors for solar array field (ESE type) with earthing items as per	1	ST	1	15.MAR.2017

For and On behalf of BHEL.

REQUEST FOR QUOTATION

 MMI:PU:RF:003	BHARAT HEAVY ELECTRICALS LIMITED Electronics Division PB No. 2606, Mysore Road Bangalore - 560026 INDIA	RFQ NUMBER: UPK0000980 RFQ DATE : 04.FEB.2017	Due Date 15.FEB.2017 Time: 13:00 HRS VENUE : NEW ENGG. BLDG
--	--	--	---

PURCHASE FILE COPY	(for all correspondence) Purchase Executive : UPENDER KUMAR Phone : 2698 9572 Fax : 00918026742498 E-mail: upender@bheledn.co.in
--------------------	--

For the information of the bidders, the documents for the purchase of the above mentioned items are available for perusal at the office of the purchase executive, BHEL, Bangalore. The documents are available for perusal from 04.02.2017 to 10.02.2017. Please refer the office of the purchase executive at Bangalore.

Sl No.	Description	Qty	Unit	Delivery qty	Delivery Date
	clause 5.35 of PS-439-1097 Test Certificate				
7	PS0679067043 Supply of items for yard lighting system such as pole pipes, lamps, lamp fittings, CPVC pipes, junction boxes, cables, cable lugs, glands, related accessories, hardware as per clauses 5.36 and 5.38 of PS-439-1097 Test Certificate	1	ST	1	15.MAR.2017
8	PS0679067051 Supply of items of module cleaning system such as submersible pumps (for bore wells), booster pumps, water storage tanks, CPVC pipes with fittings, ball valves, nipples, hose pipes as per clauses 5.39 and 5.40 of ps-439-1097 Test Certificate	1	ST	1	15.MAR.2017
9	PS0679067060 Supply of miscellaneous items such as cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, tool kits, measuring instruments, office furniture as per clauses 5.41 to 5.49 of ps-439-1097 Test Certificate	1	ST	1	15.MAR.2017
10	PS0679067078 Supply of safety related items including fire alarm system, fire extinguishers, safety gadgets as per clauses 5.50 to 5.51 of ps-439-1097 Test Certificate	1	ST	1	15.MAR.2017
11	PS0679067086 I&C: Temporary site office, arranging electrical power and water for construction, construction of temporary storage yard, unloading and movement of consignments as per clauses 5.1 to 5.4 of ps-439-1097	1	AU	1	15.MAR.2017
12	PS0679067094 I&C: Interconnection of SPV modules, cabling from strings to SMBs, installation of string monitoring boxes including cable terminations, formation of cable trenches and laying of 1CX300 sq-mm cables up to PCUs and inspection thereof as	1	AU	1	15.MAR.2017

For and On behalf of BHEL.

REQUEST FOR QUOTATION

 MMI:PU:RF:003	BHARAT HEAVY ELECTRICALS LIMITED Electronics Division PB No. 2606, Mysore Road Bangalore - 560026 INDIA	RFQ NUMBER: UPK0000980 RFQ DATE : 04.FEB.2017	Due Date 15.FEB.2017 Time: 13:00 HRS VENUE : NEW ENGG. BLDG
--	--	---	---

PURCHASE FILE COPY	(for all correspondence) Purchase Executive : UPENDER KUMAR Phone : 2698 9572 Fax : 00918026742498 E-mail: upender@bheledn.co.in
---	---

For the purpose of this Request for Quotation, the Bidding Documents shall be available for sale from the date of issue of this Request for Quotation till the date of closing of the Bidding process. The Bidding Documents shall be available for sale from the date of issue of this Request for Quotation till the date of closing of the Bidding process.

Sl No.	Description	Qty	Unit	Delivery qty	Delivery Date
	per clauses 5.5 to 5.12 of ps-439-1097				
13	PS0679067108 I&C: Erection of control room, inverter room and security room electrical panels such as inverters, ACDB, IRDB, Security Room DB, FCBC, Battery bank, erection of cable trays and cable supports, routing and terminations of DC and AC cables up to LV side of transformers in transformer yard as per clauses 5.13 to 5.15 and 5.20 to 5.22 of ps-439-1097	1	AU	1	15.MAR.2017
14	PS0679067116 I&C: Erection of transformer yard equipment such as transformers, VCB panels, C&R panels, CT, PT, GOS, 2P/4P/6P structures, 33KV cable laying and terminations, foundations, Transformer yard leveling, jelly spreading, fencing including gates as per clauses 5.16, 5.17, 5.24 to 5.27 of ps-439-1097	1	AU	1	15.MAR.2017
15	PS0679067124 I&C: Cable trenches, cable laying, cable terminations for 33KV cables as shown in SLD between inverter room and control room and from control room up to two pole structure at plant boundary as per clauses 5.18, 5.19 and 5.25 of ps-439-1097	1	AU	1	15.MAR.2017
16	PS0679067132 I&C: Cable trenches, cable laying, cable terminations for control, communication and OFC cables (between IR and control room & from SMBs to SCADA panels in IR and CMCS) related to inverters, transformers, VCB Panels, C&R panels, SCADA and other equipment as per clauses 5.28 to 5.31 of ps-439-1097	1	AU	1	15.MAR.2017
17	PS0679067140 I&C of earthing system for solar array field, control room panels, inverter room panels and transformer yard equipment including installation of Chemical earthing electrodes, erection & electrical interconnection of earth chambers, earthing of module mounting structures, laying of copper earth strips in control room installation of lightning arrestors (ESE) as per clauses 5.32 to 5.35 of ps-439-1097	1	AU	1	15.MAR.2017
18	PS0679067159 I&C of yard lights for approach road, transformer yard and boundary wall including cable	1	AU	1	15.MAR.2017

For and On behalf of BHEL.

REQUEST FOR QUOTATION

 MMI:PU:RF:003	BHARAT HEAVY ELECTRICALS LIMITED Electronics Division PB No. 2606, Mysore Road Bangalore - 560026 INDIA	RFQ NUMBER: UPK0000980 RFQ DATE : 04.FEB.2017	Due Date 15.FEB.2017 Time: 13:00 HRS VENUE : NEW ENGG. BLDG
--	--	--	--

PURCHASE FILE COPY

(for all correspondence)

Purchase Executive : UPENDER KUMAR
Phone : 2698 9572
Fax : 00918026742498
E-mail: upender@bheledn.co.in

The following is a copy of the purchase file for the above mentioned RFQ. It contains the following details: 1. Description of the work to be done 2. Quantity of the work to be done 3. Unit of measurement 4. Delivery date 5. Delivery location 6. Delivery time					
--	--	--	--	--	--

Sl No.	Description	Qty	Unit	Delivery qty	Delivery Date
	trenches, cable laying and cable terminations at the yard lighting poles as well as ACDB panel in control room and IRDB panel in inverter room as per clauses 5.36 to 5.38 of ps-439-1097				
19	PS0679067167 I&C of module cleaning system including construction of borewells, trenches for pipelines, laying of pipelines from bore wells to solar array field through water storage tanks, erection of submersible and booster pumps, ball valves, non-returnable valves as per clauses 5.39 and 5.40 of ps-439-1097	1	AU	1	15.MAR.2017
20	PS0679067175 I&C of miscellaneous and safety items such as WMS, cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, office furniture, fire extinguishers, fire alarm system as per clauses 5.23, 5.41 to 5.51 of ps-439-1097	1	AU	1	15.MAR.2017
21	PS0679067183 I&C: Pre-commissioning inspections / che MRT tests and coordination with state and central departments such as KPTCL/CEIG/SECI etc. for necessary approvals/ clearances for commissioning, synchronization with grid and post-commissioning operation of the plant as per clause 5.52 of ps-439-1097	1	AU	1	15.MAR.2017
22	PS0679067191 O&M for 1st year as per clause 8.0 of ps-439-1097 (1 AU= 3Months)	4	AU	4	15.MAR.2017
23	PS0679067205 O&M for 2nd year as per clause 8.0 of ps-439-1097 (1 AU= 3Months)	4	AU	4	15.MAR.2017
24	PS0679067213 O&M for 3rd year as per clause 8.0 of ps-439-1097 (1 AU= 3Months)	4	AU	4	15.MAR.2017
25	PS0679067221 O&M for 4th year as per clause 8.0 of ps-439-1097 (1 AU= 3Months)	4	AU	4	15.MAR.2017
26	PS0679067230 O&M for 5th year as per clause 8.0 of ps-439-1097 (1 AU= 3Months)	4	AU	4	15.MAR.2017

For and On behalf of BHEL.

REQUEST FOR QUOTATION

	BHARAT HEAVY ELECTRICALS LIMITED Electronics Division PB No. 2606, Mysore Road Bangalore - 560026 INDIA	RFQ NUMBER: UPK0000980 RFQ DATE : 04.FEB.2017	Due Date 15.FEB.2017 Time: 13:00 HRS VENUE : NEW ENGG. BLDG
MMI:PU:RF:003	PURCHASE FILE COPY		(for all correspondence) Purchase Executive : UPENDER KUMAR Phone : 2698 9572 Fax : 00918026742498 E-mail: upender@bheledn.co.in
For evaluation, exchange rate (TT selling rate of SBI) as on scheduled date of tender opening (Part-I bid in case of two part bid) shall be considered. The offers of the bidders who are on the banned list as also the offer of the bidders, who engage the services of the banned firms, shall be rejected. The list of banned firms is available on BHEL web site www.bhel.com			
Total Number of Items - 26			
i). This is only RFQ not an order. ii). In all correspondence quote RFQ No. & due date. iii). In Quotation BHEL material code / RFQ Sl. No. should be mentioned clearly. iv). v). Quotation should remain valid for a minimum period of 90 days from due date. vi). In case of non-receipt of Quotation or regret letter for 3 consecutive RFQs you are liable to be removed from our vendors list. vii). All Prices should be written in words and numbers. viii). Excise Chapter Heading should be mentioned for all items where VAT is applicable .			

For and On behalf of BHEL.

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 1 OF 58

COPY RIGHT AND CONFIDENTIAL

The information on this document is the property of Bharat Heavy Electricals Limited.

It must not be used directly or indirectly in anyway detrimental to the interest to the company

Technical Specification for
Supply of Balance of System items, Installation & Commissioning,
Operations & Maintenance
For 10 MW Solar PV grid connected power plant at
Chandapur Village, Shiggaon Taluk, Haveri Dist., Karnataka

Revision details : R 00	Prepared:	Checked:	Approved:	Date:
	LNK	SLR	NHK	11.01.2017

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 2 OF 58

1.0 Introduction

Bharat Heavy Electricals Limited (BHEL), Electronics Division, Bangalore is setting up a 10 MW Grid Connected SPV Power Plant for KPCL at Chandapur Village, Shiggaon Taluk, Haveri Dist., Karnataka.

The plant will have PV modules of poly-crystalline type mounted on fixed type of structures. Electrically, the PV array will have 8 nearly equal segments, each generating DC power of ~1250kWp, which is then inverted to AC by grid-connected power conditioning units (PCU) of 1250KW rating. At the AC output level, every two PCUs are combined using a 3-winding oil-cooled transformer of 2.7 MVA rating which will step up the voltage to 33KV.

The solar array will have 72 string monitoring combiner boxes (SMBs) that collect the solar PV generated DC power and provide inputs to the 8 PCUs housed within inverter rooms. There will be 1 No. Inverter room and 1 No. Control room – cum inverter room building. Inverter room shall house 4 PCUs (1250 KW each), ACDB, SCADA, battery bank, FCBC and other associated panels. Control room shall house 4 PCUs (1250 KW each), ACDB, battery bank, FCBC, SCADA room (air conditioned), store room and toilets.

There will be 2 Nos. transformers (2700KVA, 33KV/ xxx-xxxV) located one each on either sides the inverter room. A typical layout of switchyard is enclosed. There will be one auxiliary transformer of rating 100 KVA, 33KV/433V at control room. The plant will have SCADA integration and PC based monitoring desk to gather DC, AC and other parameters from SMBs, PCUs, weather monitoring equipment, transformers, LT / HT breaker panels.

The final output of 10 MWp solar power plant shall be connected to 33KV substation through 33KV transmission line which will be in the scope of BHEL.

This technical specification provides requirements of BHEL for supply, installation, commissioning of balance of system items and operation and maintenance of power plant for a period of 5 years. BHEL scope of supply and work is mentioned under section 3.2.

Note:

Vendor shall visit the site to assess all the technical and operational requirements and familiarize with the site conditions before placing the bid.

2.0 Documents enclosed with this specification

1	Single line diagram of overall power plant	BH-KP10H-004 (AC) & BH-KP10H-005 (DC)
2	Site layout with locations of solar array, control room, inverter room, switchyard (Autocad drawing of site layout will be provided on request by vendor through e-mail)	BH-KP10H-012
3	Control Room Layout	BH-KP10H-010
4	Inverter Room Layout	BH-KP10H-009
5	33KV Switchyard layout	BH-KP10H-006

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 3 OF 58

3.0 Scope of Supply and work

3.1 Vendor scope of supply and work

The table below indicates the vendor's scope of supply, installation and O&M for 5 years, as briefly outlined. Vendor shall submit the offer (in two part bids) as per this list and quantity.

#	Scope of supply (as briefly outlined)	Qty
1	Supply of MC4 connectors, cable ties, SMB mounting structure, HDPE pipes, cable lugs, hardware, cable trays, cable tray supports as per clauses 5.5 to 5.15.	1 set
2	Supply of Auxiliary power cables, control cables, data communication cables, 33KV termination kits, lugs and glands as per clauses 5.18, 5.19, 5.25, 5.30 to 5.31.	1 set
3	Supply of switchyard equipment such as auxiliary transformer, 33KV lightning arresters, metering CTs, metering PTs, metering panels with ABT meters, GOS isolators, PSC poles, insulators, ACSR conductor required for four pole and two pole structures, items of switch yard fencing (fence, gate, angles), items for connecting to earthing, with all related miscellaneous accessories and hardware as per clauses 5.17, 5.24 and 5.26.	1 set
4	Supply of ACDB, IRDB, Battery banks, FCBC, UPS with battery, Weather Monitoring System as per the clauses 5.20 to 5.23.	1 set
5	Supply of items of earthing system for solar array field, control room, inverter room panels and switch yard equipment including Earthing electrodes, GI flats, copper strips, copper earthing cables (green) of min 25sq mm, CPVC pipes, Insulation bushes, heat shrinkable sleeves for control room copper strip earthing and all related miscellaneous hardware as per clauses 5.32 to 5.34.	1 set
6	Supply of lightning arrestors for solar array field (ESE type) with earthing items as per clause 5.35.	1 set
7	Supply of items for yard lighting system such as pole pipes, lamps, lamp fittings, CPVC pipes, junction boxes, cables, cable lugs, glands, related accessories, hardware as per clauses 5.36 and 5.38.	1 set
8	Supply of items of module cleaning system such as submersible pumps (for bore wells), booster pumps, water storage tanks, CPVC pipes with fittings, ball valves, nipples, hose pipes as per clauses 5.39 and 5.40.	1 set
9	Supply of miscellaneous items such as cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, tool kits, measuring instruments, office furniture as per clauses 5.41 to 5.49.	1 set
10	Supply of safety related items including fire alarm system, fire extinguishers, safety gadgets as per clauses 5.50 to 5.51.	1 set
#	Scope of work (as briefly outlined)	Qty
11	I&C: Temporary site office, arranging electrical power and water for construction, construction of temporary storage yard, unloading and movement of consignments as per clauses 5.1 to 5.4	1 AU
12	I&C: Interconnection of SPV modules, cabling from strings to SMBs, installation of string monitoring boxes including cable terminations, formation of cable trenches and laying of 1CX300 sq-mm cables up to PCUs and inspection thereof as per clauses 5.5 to 5.12.	1 AU
13	I&C: Erection of control room, inverter room and security room electrical panels such as inverters, ACDB, IRDB, Security Room DB, FCBC, Battery bank, erection of cable trays and cable supports, routing and terminations of DC and AC cables up to LV side of transformers in switchyard as per clauses 5.13 to 5.15 and 5.20 to 5.22.	1 AU



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 4 OF 58

14	I&C: Erection of switchyard equipment such as transformers, VCB panels, C&R panels, CT, PT, GOS, 2P/4P/6P structures, 33KV cable laying and terminations, foundations, Switchyard leveling, jelly spreading, fencing including gates as per clauses 5.16, 5.17, 5.24 to 5.27.	1 AU
15	I&C: Cable trenches, cable laying, cable terminations for 33KV cables as shown in SLD between inverter room and control room and from control room up to two pole structure at plant boundary as per clauses 5.18, 5.19 and 5.25.	1 AU
16	I&C: Cable trenches, cable laying, cable terminations for control, communication and OFC cables (between IR and control room & from SMBs to SCADA panels in IR and CMCS) related to inverters, transformers, VCB Panels, C&R panels, SCADA and other equipment as per clauses 5.28 to 5.31.	1 AU
17	I&C of earthing system for solar array field, control room panels, inverter room panels and switchyard equipment including installation of Chemical earthing electrodes, erection & electrical interconnection of earth chambers, earthing of module mounting structures, laying of copper earth strips in control room installation of lightning arrestors (ESE) as per clauses 5.32 to 5.35.	1 AU
18	I&C of yard lights for approach road, switchyard and boundary wall including cable trenches, cable laying and cable terminations at the yard lighting poles as well as ACDB panel in control room and IRDB panel in inverter room as per clauses 5.36 to 5.38.	1 AU
19	I&C of module cleaning system including construction of borewells, installation of water storage tanks, trenches for pipelines, laying of pipelines from bore wells to solar array field through water storage tanks, erection of submersible and booster pumps, ball valves, non-returnable valves as per clauses 5.39 and 5.40.	1 AU
20	I&C of miscellaneous and safety items such as WMS, cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, office furniture, fire extinguishers, fire alarm system as per clauses 5.23, 5.41 to 5.51.	1 AU
21	I&C: Pre-commissioning inspections / checks / tests, MRT tests and coordination with state and central departments such as KPTCL/CEIG/SECI etc. for necessary approvals/ clearances for commissioning, synchronization with grid and post-commissioning operation of the plant as per clause 5.52.	1 AU
22	Operations and Maintenance of PV plant for FIVE years (60 Months) as per clause 8.0. 1 AU = 3 Months	20 AU

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 5 OF 58

3.2 BHEL scope of supply and work

For the sake of clarity to the vendor, the items that are within the scope of BHEL supply are listed below. The receipt, unloading, storage, handling, erection and commissioning of all these items are within the scope of vendor.

#	BHEL Scope of supply	Qty
1	Supply of Solar PV Modules: BHEL make, 305 to 315 Wp min. (Type L24270P)	~ 32960 Nos
2	Supply and Erection of Solar array structures with modules mounted on Fixed type structures (MMS), with each having 20 Nos. of PV modules	1648 sets
3	Supply of Cable, 1Cx 6 sq-mm (for connection of PV modules to string monitoring boxes)	approx. 130km
4	Supply of Cable, 1.1KV, 1C x 300sq-mm (for connection from SMBs up to PCUs in inverter room)	approx. 32 km
5	Supply of String monitoring boxes (24-in, 1-out)	72 Nos
6	Supply of Power conditioning units (PCUs) of 1250 kW rating	8 Nos
7	Supply of Transformers 2700kVA, 33KV /xxxV-xxxV (1 HV winding, 2 LV windings)	4 Nos
8	Supply of Cable, 1.1KV, 1Cx 300 sq-mm for AC side power connections from PCUs to LV side of transformers	approx. 3 km
9	Supply of Cable, 33KV, 1Cx 300 sq-mm for HV side power connections from transformers to VCBs and from inverter room to control room	approx. 3 km
10	Supply of 33KV outdoor PCVCB along with CT, PT, C&R panel and mounting structures	1 set
11	Supply of SCADA system with PC, accessories and software	1 set
12	Supply of Optical Fiber Cable and RS-485 cable for SCADA	1 set
	BHEL Scope of work	
13	Construction of control room, inverter room and security room including partitions.	1 Set
14	Construction of boundary wall for the entire plant, pathways, approach road, drains within the solar plant.	1 set

4.0 Documents to be submitted along with offer

1. Clause-wise compliance shall be filled-up in the column provided in this specification, with signature and seal on every page.
2. Company brochure.
3. Project implementation time schedule.
4. Stage-wise manpower schedule.

Note: Wherever approved vendors are provided, in case if it is required to propose additional vendors, the same shall be done with prior approval by BHEL. For all the items wherever approved vendors are not provided, approval of makes shall be obtained from BHEL before placement of P.O on sub-vendors.

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 6 OF 58

5.0 Detailed technical specification for supply, installation and commissioning

Vendor shall indicate clause-wise compliance (Yes/No) in the column provided below. In case of non-compliance or deviation, vendors shall record their comment.

#	BHEL specification	Vendor compliance (Yes / No) In case of non-compliance or deviation, vendors shall record their comments:
5.1	Setting up of temporary site office (1) Vendor shall set up a temporary site office using 1 porta cabin of minimum 160 sq.ft for BHEL use within 10 days from the date of purchase order to enable speedy commencement of site activities. (2) Porta cabin shall be retained at the site until completion of 3 months after commissioning. (3) Cabin shall be furnished with essential amenities such as one computer with internet connection, two work tables, six chairs and necessary number of power points, lamps and fans.	
5.2	Electrical power and water for construction (1) Vendor shall organize necessary electrical power supply such as DG sets etc required for construction activities in vendor's scope and also for the porta cabin. (2) Vendor shall also establish, on their own, water source such as bore wells, water tankers etc for construction activities in vendor's scope. (3) Vendor shall arrange drinking water for the site engineers of BHEL and the staff/employees of vendor.	
5.3	Construction of temporary yards for safe storage of vendor supplied items (1) Vendor shall, at suitable locations at the site, as decided based on discussions with BHEL site engineer, construct a temporary yard for safe storage of vendor supplied items. This includes storage of all items such as electrical panels (Battery banks, Battery chargers, Distribution boards etc), cables, string monitoring boxes, spares, tools, instruments etc. (2) Area of storage yard shall be min. 500 sq.m. However, exact size shall be decided mutually with BHEL based on site conditions. (3) A portion of storage yard area (min. 150 sq.m) shall be provided with suitable temporary roof and side covers (asbestos, FRP, steel sheet etc.) for storage of critical electrical panels (Battery, Battery chargers, electrical DBs etc.) in order to ensure that there will not be any water spillage which may damage the equipment. This should be supported by steel poles that shall be grouted using suitable concrete foundations. Height should be appropriately decided to ensure safe operation of hydra for loading/unloading etc., (4) Necessary raised / covered arrangements shall be provided to the individual panels / equipment to ensure that these items are not affected by water at the ground level during time of rain storm, flood etc.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 7 OF 58

	(5) Yards shall be fenced all around with a steel gate of width of 4m minimum. Height of fence and gate shall be 2.5m minimum above the ground level. (6) Suitable fencing shall be provided using steel poles at every 3m intervals and barbed wires between the poles. (7) Gate shall be suitably secured to the fencing poles and shall be provided with lock and key. (8) Watch and ward security personnel shall be provided for the yards on round-the-clock basis. (9) Unloading, storage and security of BHEL supplied items as listed in Clause 3.2 shall be taken care by BHEL.	
5.4	Receipt, unloading, safe storage and movement of vendor supplied items: (1) Vendor shall organize all necessary resources such as labour, machinery and tools (cranes, hydra, forklifts, transportation trucks / trolleys, lifting accessories etc.) for unloading the vendor supplied items received at the site and subsequent movement to the storage yard. Similar arrangements shall also be made by vendor for movement of the items from storage yard to the point of construction for vendor's scope of works. (2) Vendor shall maintain proper documentation / compilation of all the records related to shipping (invoices, delivery challans etc) and shall take verification and approval from BHEL site engineer for every consignment. The documents shall be suitably preserved for further handing over to BHEL. (3) Safeguarding the items from pilferage etc. is responsibility of vendor. For this purpose, vendor shall post adequate watch and ward for the yard on round-the-clock basis. (4) Registers shall be maintained for the yard to keep track of incoming / outgoing items. (5) BHEL will ensure insurance for all the items. Vendor shall provide necessary documentation and assistance to BHEL for making insurance claim in case of damage / theft of BHEL supplied items. For items supplied by BHEL and other BHEL vendors: (1) Receipt, unloading, storage, security guards shall be in scope of BHEL and other Vendors. (2) However, movement of those items related to vendor scope of I&C from their respective storage locations to the points of construction is in scope of vendor. Accordingly, vendor shall organize all necessary resources such as labour, machinery and tools (cranes, hydra, forklifts, transportation trucks/ trolleys, lifting accessories etc) for this purpose.	
5.5	Interconnection of SPV modules to form strings. Supply of SPV modules is in BHEL scope. 32960 Nos. of BHEL make PV module of L24270P type, 305 to 315 Wp shall be supplied. Vendor shall interconnect the modules as follows: (a) Each module is fitted integrally with a junction box having positive and negative polarity cables (4 sq-mm). (b) Positive cable of one module shall be connected to the negative cable of adjacent module. The cables have MC4 type of connectors. One polarity cable has male type connector, while the other has female type connector. (c) This way, 20 modules shall be connected in series for L24270P type. Each set of connections is called as a series string. Thus, 1648 series strings shall be formed with 32960 modules. (d) After placing the purchase order on vendor, BHEL will provide layout drawings that will describe the exact way in which the series strings are formed and	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 8 OF 58

	interconnected to the respective SMB's. Vendor shall implement the interconnection as per these drawings. (e) Interconnected cables shall be neatly routed and dressed using UV resistant nylon cable ties of appropriate dimension. (f) These cable ties shall be in vendor scope of supply. Recommended make: 3M, Phoenix contact, Weidmuller, Hellermannntyton, Panduit. BHEL approval shall be obtained by vendor for use of any other make. Specs: Nylon cable ties, polyamide 6.6 UV stabilized black, UL94 flammability rating V2, meant for outdoor use. Operating temperature up to 85 deg C. Width of cable tie shall be minimum 4.5 mm. BHEL approval shall be obtained for the selected brand and length of cable tie. (g) Cables shall not be loosely hanging.	
5.6	Installation of string monitoring boxes: (1) Supply of string monitoring boxes (SMB), 72sets is in BHEL scope. These are 24-in and 1-out type. (2) Vendor shall install the SMBs on independent structure with foundation in the solar array field as per final array layout. (3) Design, supply of SMB mounting structure using GI channels/angles and necessary hardware required for installation of SMBs are in the scope of vendor. (4) Design and construction of foundation for SMB mounting structure is in the scope of vendor. (5) Drawings of SMB and the fixing arrangement will be provided to the vendor after placement of purchase order. (6) SMB location will be identified by BHEL and will be provided in the wiring layout. (7) SMBs shall be fixed on the structures using the hardware that are supplied by BHEL as part of SMB assembly kit. (8) All tools necessary for mounting shall be in vendor scope.	
5.7	Interconnection of SPV module cable to 6 sq-mm cable: (1) Each SPV module string shall be connected to SMB using 1Cx 6 sq-mm cable supplied by BHEL. Overall diameter ~ 6 mm. Diameter under the outer sheath (i.e over the insulation) ~ 4.6 mm. (2) SPV module is provided with positive and negative cables (4 sq-mm) having male and female parts of MC4 type connectors. (3) Vendor shall supply plug connectors of MC4 type, each set having a pair of male and female parts, to join the 6 sq-mm cable with SPV module string. Necessary crimping and termination is in the scope of vendor. (4) MC4 connectors shall have rating of 1000VDC (IEC), rated current of 25A (min.), Type approved by TUV Rheinland for product safety. (5) The make of MC4 connector (for the 6 sq.mm cable at PV module end) to be supplied shall be same as that of MC4 connector connected to PV module which shall be informed by BHEL after placement of P.O. (6) Total quantity of MC4 connector sets required = 1648 sets (each set having a male and a female part). (7) Extra quantity shall also be procured considering possibilities of damages during the installation. Vendor shall ensure that there shall not be any shortage during execution time. (8) In addition to the above safety margin, vendor shall supply 152sets extra as spares for contingency use during post-commissioning period. (9) Four sets of tool kits (with plastic box enclosure) shall be supplied and stored at the site as O&M tools. This shall include crimping plier MC4, open end spanner set MC4, stripping plier MC4, socket wrench insert to tighten, socket wrench	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 9 OF 58

	insert to secure, inserts for both 4 sq-mm and 6-sqmm (of both pliers). Vendor should make available extra MC4 tool kits of at least 20 nos., during execution for simultaneous working on the array. Note: For any other equivalent make of plug connectors and tool sets, BHEL approval shall be taken prior to procurement.	
5.8	Routing of 1Cx 6 sq-mm cable: (1) 6 sq-mm cables connecting the SPV module strings to SMBs shall be neatly routed along the module mounting structures using cable ties. (2) Cable ties, nylon polyamide 6.6 UV stabilized black, UL94 flammability rating V2, operating temperature up to 85 deg C, shall be used to arrest any possibility of movement or sagging. Cable ties shall be of make: 3M, Phoenix contact, Weidmuller, Hellermannntyton, Panduit. Width of the cable ties shall be a minimum of 4.5 mm. BHEL approval shall be obtained for the selected brand and length of cable tie. (3) Cables shall not be loosely hanging.	
5.9	Underground laying of 6 sq-mm cables between the rows (1) Where 6 sq-mm cables run between two rows of structure, HDPE double walled corrugated (DWC) pipe shall be used to guide the cables underground from one row to the other in trenches. (2) HDPE DWC pipe of required length shall be within scope of vendor supply. (3) Specification of HDPE DWC pipe: As per IEC 61386 part 1-4; Inner Diameter (ID) shall be selected to accommodate the number of 6 sq-mm cables to be guided. However, Inner diameter shall be limited to a minimum of 63mm. Qty required ~5000 M (4) Make: Tirupati Plastomatics, Jaipur or reputed make, as approved by BHEL. (5) Make, part number, sizes / dimensions, datasheet shall be submitted to BHEL for approval. (6) Details of cable trench: (a) Trench depth = 600 mm minimum. (b) Trench width = 200 mm minimum. (c) Bottom layer shall be sand of IS: 383 with 100mm thick. (d) HDPE conduit shall be laid over the sand layer. (e) Another layer of sand of 100 mm thick. (f) Then, a single layer of class-2 brick (burnt clay type) of 75 mm thickness shall be laid. (g) Trench shall, then, be filled with refill soil and compacted. (7) Vendor to procure necessary quantity of HDPE pipes based on the actual requirement and ensure no shortfall in supply during the time of installation.	
5.10	Connecting the 6 sq-mm cables on input side of SMBs (1) 6 sq-mm cables of positive and negative polarities originating from SPV module strings shall be terminated at the input side of SMBs. Vendor scope includes removal of sleeve at the cable end, routing of cable through glands fitted to SMBs, crimping with suitable copper cable lug & termination in SMB. Supply of copper lugs for 6-sqmm cable shall be in vendor's scope of supply. Make: Dowell's / 3D / 3M or any other reputed equivalent as shall be approved by BHEL. Termination arrangement in SMB in through terminal blocks. Qty required ~3500 Nos + 200 Nos as spare. (2) All necessary tools such as pliers, strippers, crimping tool etc shall be within vendor scope.	
5.11	Connecting the 300 sq-mm cables on output side of SMBs (1) Cables of 1Cx 300 sq-mm (Aluminium, armoured, XLPE insulation, PVC sheathed) cables of positive and negative polarities shall be terminated at the output side of SMBs. Supply of this cable is in BHEL scope.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 10 OF 58

	(2) Overall diameter of cable ~ 30mm. (3) Vendor scope includes removal of sleeve at the cable end, crimping with suitable cable lug of appropriate type/size and connecting the lugged end to the bus bar within the SMB. Cables shall enter the SMB through the cable glands that are supplied by BHEL along with SMBs.	
	(4) Cable lug shall be in vendor scope of supply. Lug shall be bimetallic (Cu and Al) of appropriate duty and size. Make: Dowell's /3D / 3M or any other reputed equivalent as shall be approved by BHEL. Quantity required ~ 144 Nos + 16 Nos extra as spare. (5) Hardware such as bolts, nuts, plain washers and spring washers shall be in vendor scope of supply. The size and type of these shall be in accordance with termination arrangement on the bus bar of SMB. Hardware should be SS304. Spring washers should be Zn coated. (6) All necessary tools such as pliers, strippers, crimping tool etc., required to complete the work shall be within vendor scope.	
5.12	Cable trenches for laying power cables from SMB to inverter room: (1) 1Cx 300 sq-mm (Aluminium, armoured, XLPE insulation, PVC sheath) cables of positive and negative polarities are routed from SMB box to power conditioning units (PCUs) located at the respective inverter rooms. (2) Overall diameter of cable ~ 30 mm. (3) These cables shall be laid underground from the point near SMB to inverter room. (4) Two cables (+, -) from each of the 72 SMBs have to be routed to respective inverter rooms. (5) Tentative Array layout with location of SMBs and inverter rooms is enclosed for vendor's reference and for estimation purpose. Exact solar array layout will be provided by BHEL after placing purchase order. Vendor shall prepare and furnish cable routing layout as per standards for approval by BHEL. (6) Vendor shall estimate the length of cable trench. Generally these power cables will be packed in 1000 m drums. Vendor has to carefully plan laying of farther cables first to ensure cut lengths can be used for shorter cables. Any shortage of cable occurring because of vendor's works will be in the scope of the vendor. (7) Vendor shall construct the underground trench as follows: - Trench depth = 750 mm minimum. - Trench width shall vary en route to inverter room, based on the number of cables. As the cables join from SMBs en route, bunching takes place and the width of trench shall increase. Max trench width expected = 2m. - Sand as per IS: 383 of 100 mm layer thickness shall be laid at the bottom most level of trench. - Over the sand layer, cables shall be laid one adjacent to the other. Cables shall not be laid one over the other. In other words, only one layer of cables shall be allowed. - Over the layer of cables, one more layer of sand of 100mm shall be laid. - Then, a single layer of class-2 brick (burnt clay type) of 75 mm thickness shall be laid. - Trench shall then be filled up with refill soil. - Subsequently, land over the cable trench shall be leveled and compacted suitably. The cables shall be laid inside Class-B GI pipes/ RCC hume pipes of suitable size under road crossings, drains, sewerage lines, entry and exit points of the buildings or where there are chances of mechanical damage Only terminal cable joints shall be accepted. No cable joints to join two cable ends is acceptable. Supply of GI/RCC hume pipes is in the scope of vendor.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 11 OF 58

5.13	Installation (indoor) of PCUs, battery banks, FCBC battery charger panels, SCADA panels, ACDB, IRDB, and security room distribution panels located inside control room, inverter room and security room together with cable trays in cable trench: (1) Vendor shall organize necessary resources such as labour, cranes, hydra, forklifts, transportation trucks / trolleys and other accessories for movements and positioning of the items as below within the control, inverter and security rooms: - PCU panels: 8 sets (each ~2500 Kg) 110V DC Battery banks: 2 sets - FCBC battery charger panels: 2 Nos - ACDB panel: 1 No - IRDB panel: 1 No - SCADA panels: 2 Nos (~500 Kg each). - Control desk with PCs and accessories: 1 set. (2) Panels shall be placed over the cable trenches in control room or inverter room, in the exact sequence and locations as shown in BHEL drawings that will be provided to vendor at an appropriate time during the period of execution. (3) Panels shall be suitably grouted using welding / bolting methods as appropriate. BHEL approval shall be obtained for the grouting arrangement. All necessary hardware for the same shall be within vendor scope of supply. (4) Vendor shall supply and install cable trays of required length and corner bends as required within control room and inverter room for laying DC, AC & signal cables over the trays. Vendor shall supply cable trays as follows: - Ladder type GI cable trays - Hot dip galvanized - Depth = 40 mm min. - Width = 600 mm min. (5) Vendor shall fix the cable trays on the projecting steel sections in cable trench of control room and inverter rooms. Supply and works related to the appropriate placement of these steel sections will be in the vendor's scope. (6) Adjacent cable trays shall be interconnected using suitable hardware items that shall be in vendor scope of supply. (7) Cables shall be laid over the cable trays and neatly dressed using appropriate cable ties etc. (8) For DC input cables of PCU, cable support structure within inverter room (close to the entry holes) shall be provided to avoid sagging strain on the cables. Supports shall be made using suitable ISA MS angles (75x6 minimum) suitably painted with red oxide and BHEL approved black paint. BHEL approval shall be taken for the support arrangement. (9) Similarly, cable ladders shall be provided for AC output cables of PCU to avoid sagging strain, near all the exit points, through which the cables approach transformers placed at the switchyard. Cable ladders shall be made of MS, painted using red oxide and black paint. Drawing of ladder arrangement shall be submitted to BHEL for approval. (10) Cables from AC side of PCU shall be laid over ladder type cable trays up to LV side of 2700 KVA inverter transformer. (11) 1Cx300 sq-mm cables are routed from inverter room to transformers in switchyard on cable trays through an opening in the walls of inverter room. These openings shall be closed using a suitable sheet made of steel / aluminum / fiber etc. to arrest entry of rodents. These cable support structures at the entry and exit are to ensure that cable enters the control room/inverter rooms	
------	--	--

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 12 OF 58

	at an elevated level than the ground level. This will be useful to avoid any sort of water ingress into the cable trench in the control room/inverter rooms.	
5.14	Power cable terminations on DC side of PCUs in inverter room (1) On DC side, for each PCU, vendor shall carry out the required number of cable terminations for 9 positive and 9 negative inputs connections – unsleeving, crimping and connecting. (2) BHEL shall supply the cables (1CX300 sq-mm Aluminum, armored, XLPE insulation, PVC sheath). (3) All cable glands, cable lugs, bolts, nuts and washers required for termination on DC side of PCU shall be supplied by the BHEL. (4) All tools and accessories required to carry out the termination shall be within scope of vendor.	
5.15	Power cable terminations on AC (LT) side for PCUs and transformers (1) On AC side, 3-phase 3-wire power cable interconnections shall be made between PCUs and transformers using 6 runs of 1Cx300mm² Aluminum, armored, XLPE insulated cable per phase. BHEL will supply the required cable. (2) For cable terminations at PCUs, BHEL shall supply the cable glands, cable lugs, bolts, nuts, plain washers and spring washers. (3) For cable terminations at transformer end, vendor shall supply the required number of cable glands, cable lugs, bolts, nuts, plain washers, spring washers. Bimetallic lugs (Al-Cu) shall be supplied. Bolts, nuts, plain washers shall be of SS304 type. Spring washers shall be zinc plated steel. All these shall be of Dowell's / 3D / 3M or reputed equivalent as approved by BHEL. BHEL will furnish the exact diameter of the cable at an appropriate time during the period of execution. Vendor shall make suitable size cut-outs using hole-saw cutters in the gland plates of the transformers for entry and exit of cables. Quantity required ~ 144 Nos + 16 Nos extra as spare. (4) Vendor shall make the measurements between the equipment, cut the cables to the required lengths, fix them with glands, unsleeve them at the ends, crimp them with the lugs and terminate them at the respective bus bar provisions within the panels. (5) There are 8 PCUs of 1250KW, and 4 Transformers of 2700KVA rating. (6) All tools and accessories required to carry out the termination shall be within scope of vendor. (7) Cable tray supporting structure shall be installed between control room and LV side of transformer using ISA angles of minimum 75x6 arranged in vertical and horizontal orientations and joined using welding. The level of structure shall be at a minimum height of 400 mm above the ground level. Adequate number of horizontal angles shall be provided to minimize gap between two angles so that cable sagging is avoided. Vertical angles shall be grouted using concrete foundation with depth of minimum 400mm. PCC layer 1:3:6 of 100mm thick shall be used. Cross section of foundation shall be minimum 200x200mm. All items required for the structure shall be in vendor scope of supply. Cable shall be laid on ladder type cable trays. Structure shall be painted using red oxide and BHEL approved black paint. Suitable arrangement, such as fixing perforated cable trays in inverted position, shall be provided to cover the laid cables. Drawing of cable supporting structure shall be submitted to BHEL for approval. (8) Quantity of cable support structure with cover =8 sets. (9) Supply of cable trays (ladder type and perforated type) is in the scope of vendor.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 13 OF 58

5.16	Foundation pedestals and outdoor installation of 2700kVA, 33KV /xxx-xxxV transformers supplied by BHEL (1) Number of transformers = 4 Nos. Transformers are located one each on either side of inverter room and control rooms. (2) Vendor shall construct RCC foundation for each set of transformer. Design of foundation shall be prepared by the vendor considering soil report that shall be provided by BHEL. Following are the minimum requirements for foundations: (a) Weight of each transformer ~ 8000 Kgs (b) Size of foundation ~ 2500 x 2500 mm (L x B). (c) Foundation below ground level shall include PCC 1:3:6 layer (~200 mm) and if required based on site conditions, sand and boulder layers also shall be required to strengthen the foundation, in which case overall foundation depth shall be ~ 600mm below ground. (d) Foundation pedestal height above the ground level ~ 500 mm that includes M25 concrete with steel rods of 8mm minimum diameter for skin reinforcement all around with inside steel chairs etc. (e) Hardware arrangements (steel bolts, plates, nuts, washers etc), which will be part of foundation pedestal for anchoring the transformer, shall be provided as per BHEL drawing. (f) Pedestal shall be provided with cement plastering all around to achieve a smooth finish and painted with two coats of approved brand and colour water proofing cement paint. Second coat of painting shall be carried out after installation of transformer. (3) Transformer and its accessory parts such as radiators, cable boxes, hardware etc as supplied by BHEL shall be moved from storage yard and positioned on foundation pedestal. All parts and hardware shall be assembled as per guidance at site provided by BHEL / transformer vendor. (4) Vendor shall provide all necessary support and assistance to the representative of transformer manufacturer during installation: (a) Oil filling in all transformers. (b) Measurement of parameters: insulation resistance etc. (c) Connections to marshalling box (5) Vendor shall submit drawing of transformer foundation to BHEL for approval. (6)	
5.17	Installation of equipment in outdoor Switchyards at Control Room and Inverter Room Output from inverter transformer is connected to outdoor type Porcelain Clad Vacuum Circuit Breaker (PCVCB) as shown in the typical switchyard layout enclosed. Outdoor switchyard at control room and control rooms shall consist of the following items apart from inverter transformers. 1. 33KV Outdoor PCVCB with CT, PT and structure (7 sets) 2. Outdoor Control and Relay panels for each VCB (7 Nos) 3. 33 KV Outdoor LA (27 Nos) 4. 33KV Outdoor metering CT (3 Nos) 5. 33KV Outdoor metering PT (3 Nos) 6. Outdoor ABT metering panel with main and check ABT meters (1 No) 7. 4-pole, 6-pole and 2-pole structures using PSC poles (As required) 8. 33KV GOS (Isolators) mounted on 4-pole, 6-pole and 2-pole structures (9 Sets) 9. ACSR COYOTE conductor, pin/disc insulators and hardware as required.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 14 OF 58

	Supply of PCVCBs and associated CTs, PTs, C&R panels along with their mounting structures is in the scope of BHEL. However, Erection of these BHEL supplied items including associated civil works shall be in vendor's scope. Supply and installation of all other items is in the scope of vendor. Vendor shall supply and install 33KV Outdoor metering CTs, metering PTs and metering panel with ABT meters (main & check) at switchyard near control room as per KPTCL/KPCL/CEIG requirements. Further, vendor shall also supply 33KV Outdoor metering CTs, metering PTs and metering panel/s with ABT meters (main, check & standby) as per KPTCL/KPCL/CEIG requirements which will be installed by BHEL/KPCL at evacuation substation. Separate CTs and PTs shall be provided as per KPTCL/KPCL/CEIG regulations for standby meter as per plant SLD attached. Vendor shall construct RCC foundations for all the outdoor switchyard equipment as per KPTCL standards. Design of foundation shall be prepared and submitted for approval by the vendor considering soil report that shall be provided by BHEL. For Control and Relay panels, vendor shall construct covered sheds with Galvalum sheets including foundation within switchyards one each at control room and inverter rooms. Clearances shall be provided around the C&R panels for maintenance and as per CEIG regulations. Vendor shall submit general arrangement and detailed drawings with bill of materials/quantities of the six pole/four pole/two pole structure set as per relevant CEIG/KPTCL standards, with individual item description, quantity, make, specs / ratings etc for BHEL approval. Vendor shall submit GTPs and GA drawings of all the items in vendor's scope of supply such as LA, CT, PT, ABT meters, metering panels, ACSR (COYOTE conductor), GOS, insulators, PSC poles etc. Note: All MS parts of 4-pole/6-pole/2-pole structure shall be suitably painted using red oxide and BHEL approved silver colour paint. Spares to be supplied: (1) 33KV Isolator- 1 set (2) 33KV metering CT- 3 Nos (3) 33KV metering PT – 3 Nos (4) 33KV LA – 3 Nos Detailed specifications for 33KV switchyard equipment is as below: A) Specification for 33KV Isolators: TYPE AND RATING Isolating switches are used to isolate the equipment. The Isolators shall be suitable for outdoor operation. STANDARDS The isolator switches shall comply in all respects with IS:9921 or IEC publication No.129 latest edition.	
--	---	--



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 15 OF 58

ISOLATOR PARAMETERS:

- a) Rated Voltage : 36 kV
- b) Nominal system Voltage : 33 kV
- c) Type of installation : Outdoor
- d) Rated normal current : $\geq 400A$
- e) Rated short-circuit making current for earth switch : 25 kA
- f) Operation:
 - i) Isolator : Manual - Gang operated
 - ii) Earth Switch : Manual - Gang operated
- g) Rated short time current:
 - i) 1 sec. KA rms : As per relevant IS
 - ii) Peak withstand KA : As per relevant IS
 - iii) Temperature rise : Maximum Temp. rise not exceeding 40 deg.C over an ambient Temperature of 50 deg.C
- h) No. of poles : Three
- i) Operation Main switch : Horizontal break
- j) No. of breaks per circuit per pole:
 - Main Switch : Two
- k) Insulation level : As per IS 9921
- l) Minimum creepage distance : As per IS 9921

CONSTRUCTIONAL FEATURES OF HORIZONTAL DOUBLE BREAK TYPE

The Horizontal double break type, three phase isolators shall be centre pole rotating, manual gang operated mechanism. The design of the isolators shall be such that the switch can be changed to right or left hand operations. The live parts shall be designed to eliminate sharp points, and other surfaces likely to produce corona and adequate shield shall be provided. Live parts shall be manufactured from non-rusting, non-corroding metal. Current carrying parts shall be of hard drawn electrolytic grade copper. Bolts, screws and pins shall be provided with lock washers, keys or other equipment locking facilities and if used on current carrying parts, shall be made of copper silicon alloy or equivalent material. The isolator shall not require lubrication of any part at frequent intervals.

The isolators shall be suitable for being mounted in upright positions (with blades moving in the horizontal plane) on the steel support structures and also suitable for mounting on the high type structures in the outdoor yard.

The double break isolator shall consist of three identical pole units. Isolators are required to be double break, three posts per phase, triple pole, single throw, rotating center post through double tandem pipe, silver plated contacts, with horizontally operating blade and insulator posts arranged vertically.

The manual operating mechanisms shall be of robust construction, conveniently located for operation and easily operatable by a single person. The length of the operating rod shall be such that the height of the manual operating handle above the ground is atleast 600 mm. The isolator shall be so constructed that the switch blades will not fall to the closed position, if the operating shaft gets disconnected.

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 16 OF 58

	The moving blades of double break isolator shall be HDEC (hard drawn electrolytic copper) tube of suitable thickness or one solid copper piece with contact surface silver plated to carry continuous/short time current. Construction shall be so designed that no part of the blade can move relative to the other parts. The thickness and section of the blade shall be such that it retains its form and straightness under all conditions of operation including the flow of system fault current for the specified period. It shall also be capable of withstanding all torsional and bending stress due to operation of the isolators. Wherever necessary the blades shall be counter balanced by weights or springs. Fixed guides shall be provided so that proper seating of contacts will be achieved while closing even when a blade is out of alignment by 3 cm or less. Further the main blade shall pass through the main actuator assembly without any joints so that there is no necessity of shunting by flexible copper conductors. The design and construction shall be such as to provide positive control of blades in all positions with minimum mechanical stress on insulators. Fixed guides shall be provided so that proper seating of contacts shall be obtained. CLEARANCES Clearances between live parts and grounded structures shall not be less than those specified in the latest edition of IS. Length of break in full open position shall be such that there is absolutely no possibility of arc over from the live parts to the de-energized parts on which any maintenance works may have to be done. The necessary arcing contacts shall be provided on the moving blades. ISOLATOR INSULATION Insulation to ground, insulation between open contacts and the insulation between phases of the completely assembled isolator shall be capable of withstanding the dielectric test voltages specified in the data sheets enclosed. Insulation between open contacts of a pole shall be atleast be 15% more than the insulation between live parts of a pole to ground so that if any flash over occurs when isolator is open, it shall be to the ground. The insulators should be of solid core of multiple stack, shall conform to IS:2544 or other internationally recognized standards. The insulators selected shall be for use in heavily polluted atmosphere and shall be specifically suited to meet the particular requirements of ultimate torsional strength and cantilever loads, which they will be called upon. The porcelain shall be homogenous and free from all cavities and flaws. Design of the insulators shall ensure ample insulation, mechanical strength and rigidity for satisfactory operation under site conditions. The design, shall also ensure that the losses caused by capacitive currents or conduction through dielectric are minimum and that the leakage due to moist and dirty insulators surface is least. All metal caps and supports shall be connected to the porcelain whereas the blades and contact blocks shall be bolted to the metal parts of insulator thus making the replacement of damaged insulator easy. OPERATING MECHANISM The design of operating mechanism shall be such that minimum of energy is required for operation and one man shall be able to operate the switch without undue effort. The operating mechanism and its controls shall be so designed that	
--	--	--

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 17 OF 58

	under no circumstances the switch blade travel is interrupted before it reaches the fully close or open position Two Nos. of earthing terminals shall be provided on the operating mechanism, to enable proper grounding. Flexible conductors of adequate cross section shall be provided at the lower end of the vertical operating shaft for connection to the station ground. INSULATION LEVEL The isolators shall have minimum insulation levels as per IS:9921 and IEC publication No. 129. CONTACTS The isolator shall be provided with high pressure self-aligning adjustable silver plated copper contacts. The contacts shall be designed such that the contact pressure is released before any movement of the blades in the opening direction takes place and is applied after the closing travel is completed. The blades shall have a turn and twist movement in case of double break isolators so that there shall be sufficient wiping action of the contacts to make them self-cleaning. The earth switches should be provided with three sets of suitable type of fixed contacts below the fixed contacts assemblies of the main switch on the incoming supply side and three sets of moving contacts having ganged operation. These contacts shall be fabricated out of electrolytic copper and dimensioned to withstand the rated currents. The temperature rise of the contacts and other current carrying parts shall not exceed value specified in IS:9921 at an ambient air temperature of 40 Deg. C while carrying the rated current continuously. The temperature rise due to the passage of the rated short circuit current for a period of 1 sec. shall not cause any annealing or welding of the contacts. ARCING CONTACTS : Arcing contacts provided shall close first and open last so that no damage due to arcing shall be caused to the main contacts. TERMINAL CONNECTORS Each isolator shall be provided with rigid type aluminum/bimetallic alloy connectors suitable for ACSR COYOTE conductor. The terminal connectors shall be suitable for horizontal or vertical takeoff. The required quantity of terminal connectors shall be supplied. ISOLATOR BLADES AND JAWS: The isolator blades shall be HDEC (hard drawn electrolytic copper) tube of suitable thickness or one solid copper piece with contact surface silver plated. Construction shall be so designed that no part of the blade can move relative to the other parts. The thickness and section of the blade shall be such that it retains its form and straightness under all conditions of operation including the flow of system fault current for the specified period. It shall also be capable of withstanding all torsional and bending stress due to operation of the isolators. Wherever necessary the blades shall be counter balanced by weights or springs. Fixed guides shall be provided so that proper seating of contacts will be achieved while closing even when a blade is	
--	---	--



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 18 OF 58

out of alignment by 3 cm or less. The isolators to be supplied against this contract shall be employed with turn and twist motion and shall have no problem with the contact alignment. Further the main blade shall pass through the main actuator assembly without any joints so that there is no necessity of shunting by flexible copper conductors.

The sharp edges in the fixed contact terminal casting and bolt heads have to be rounded off to minimize the corona discharges. The ends of the blade arm pipes shall be suitably plugged by metal or nylon plugs to prevent entry of water or insects and corona discs shall be provided where ever necessary.

SUPPORT STRUCTURES

The required quantity of Concrete Poles for mounting the isolator on the ground shall be supplied for mounting the isolators in upright positions. The live terminals of the equipment shall be min 3700 mm from the ground level. The concrete poles shall in general conform to the latest issue of IS.

DESIGN, MATERIALS & WORKMANSHIP

The vendor shall assume full responsibility for co-ordination and adequate design. All materials used in the construction of the equipment shall be of the appropriate class, well finished and of approved design and make. All similar parts should be accurately finished and interchangeable.

All ferrous parts shall be hot dip galvanized. Bolts, nuts, pins and washers etc., used on the isolators shall also be galvanized. Special attention shall be paid to give tropical treatment to all the equipment as they will be subjected during service to extremely severe exposure to atmospheric moisture and to long period of high ambient temperature. All current carrying parts shall be of non-ferrous metal or alloys and shall be designed to limit sharp points, edges and similar sharp faces.

FASTENERS

Nuts, bolts, studs and washers for use in the plant shall conform to the requirements of the appropriate standards, where the contract includes nuts and bolts of different standards; the necessary tools shall be provided in compliance with this specification and shall include spanners, taps and dies for these nuts and bolts.

TESTS

Each isolator and earth switch shall strictly comply with the requirements of all the approved type tests and shall be subjected to all routine/acceptance tests stipulated in the relevant standard.

B) Specification for 33KV Current Transformers:

TYPE AND RATING

The 36 kV Current transformers shall be Outdoor, Dead tank type, Copper wound, single phase, 50 Hz, oil immersed, self-cooled and suitable for operation under site climatic conditions without any protection from sun and rain.

STANDARDS

The Current transformers shall comply with the latest issue of IS 2705 (Part I,II,III and IV) or IEC 185 except where specified otherwise. Equipment meeting any other authoritative standard, which ensures an equal or better quality than the standard mentioned above, is also acceptable.



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 19 OF 58

The Current transformers shall have the following ratings.

- a) Rated /Nominal System voltages : 36KV / 33kV
- b) One minute power frequency : 70 kV rms.
- c) 1.2/50 micro second impulse : 170 kV Peak
- d) Creepage distance for Equipment (Min.) : As per IS
- e) No. of phases : 3
- f) Frequency : 50 Hz
- g) Short-circuit current (withstand for 1 sec.) : 25 kA

NOTE: The current ratio, No. Of cores, burden and knee point voltage and other parameters shall be decided during detailed engineering stage. Please ensure 0.2s accuracy class for ABT metering core.

GENERAL

The Current transformers shall be of single phase, oil immersed and self-cooled, suitable for the services indicated, complete in all respects, conforming to the modern practice of design and manufacture.

The core shall be of high grade, non-ageing, electrical grade silicon laminated steel of low hysteresis loss and high permeability to ensure high accuracy at both normal and over currents and voltages.

The current transformers shall be sealed to eliminate breathing and prevent air and moisture from entering the tank. These shall be provided with oil level gauge and a pressure relieving device capable of releasing abnormal internal pressure. The temperature rise shall be as specified in the latest IS 2705.

Secondary terminals of current transformers shall be brought out in a weatherproof terminal box. Glands and lugs for terminating cable connections shall be provided.

Terminal and polarity marks shall be indelibly marked on each current transformer on the associated terminals and these marks shall be in accordance with relevant standards.

The current transformers shall be provided with the following accessories.

- a) Primary terminal connectors suitable for ACSR Coyote conductor.
- b) Two earthing terminals on tanks on opposite sides for connecting earthing conductors.
- c) Facility for lifting bushings and tank.
- d) The quantity of insulating oil required for first filling. Di electric dissipation factor of the oil shall not exceed 0.005. Insulating oil shall comply with applicable standards.
- e) Rating and diagram plate as per relevant standards.

Current transformers shall be given tropicalized treatment for satisfactory operation in hot and humid condition.

The temperature rise shall not exceed the figures given in applicable standards for operation under ambient temperature conditions.



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 20 OF 58

The tanks/bases and all exposed ferrous parts shall be hot dip galvanized and painted conforming to applicable standards.

In the case of multi-core CTs, it shall be possible to adjust the tap settings on any core independent of the setting on the other cores, for which purpose these tapings will have to be provided on the secondary windings.

In case of multi ratio current transformers, the minimum specified requirements in respect of VA, accuracy, knee point voltage and maximum secondary resistance shall be met at all taps.

Magnetizing characteristics (extending well beyond knee point voltage) and secondary impedance values shall be furnished for all protection cores.

INSULATORS/BUSHINGS

Insulators / bushings shall conform to applicable standards and shall be made of homogeneous vitreous porcelain, the glazing of which shall be of uniform brown or dark brown in colour.

Oil filled insulators/bushings shall be hermetically sealed to prevent ingress of moisture. Metallic bellows/Nitrogen gas shall be used for cushioning and to allow for expansion.

TESTS :

The following routine tests shall be carried out on all the current transformers in the presence of the purchaser's representative as per the relevant latest IS and 6 sets of test certificates shall be furnished for approval before dispatch. No equipment shall be dispatched before the approval of test certificates and dispatch instructions are conveyed by the purchaser.

- a) Verification of terminal markings and polarity.
- b) Power frequency voltage with stand test on primary windings.
- c) Power frequency voltage with stand test on secondary windings.
- d) Over voltage inter turn test.
- e) Determination of errors according to the requirements of the appropriate accuracy class.
- f) Partial discharge tests

The following type tests shall be carried out on one of the current transformers. If the manufacturer has already carried out type test on similar (33KV class) equipment, a copy of the same shall be furnished for purchaser's reference. If type test is not carried out, the same shall be conducted free of cost and test certificates furnished for purchaser's approval.

- a) High voltage power frequency test on primary windings.
- b) High voltage power frequency test on secondary windings.
- c) Determination of errors according to the requirements of the appropriate accuracy class.
- d) Short time current test.
- e) Temperature rise test.
- f) Impulse voltage test.



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 21 OF 58

A copy of the type test certificate for the following type tests carried out on one of the bushings shall be furnished for purchaser's reference.

- a) Power frequency visible discharge test.
- b) One minute power frequency withstand test.
- c) Full wave impulse voltage withstand test.
- d) Under oil flash over or puncture withstand test.

C) Specification for Potential Transformer

The Potential transformers shall have the following ratings.

- a) Rated /Nominal System voltages : 36 / 33kV.
- b) Rated primary voltage: : $33/\sqrt{3}$
- c) Rated secondary voltage : 110 v/ $\sqrt{3}$
- d) One minute power frequency : 70 kV rms
- e) 1.2/50 micro second impulse : 170 kV Peak
- f) With stand voltage for secondary : 2 kV rms
- g) Creepage distance for Equipment (Min.) : As per IS 3156
- h) No. of phases : 3
- i) Frequency : 50 Hz
- j) Short-circuit current (withstand for 1 sec.) : 25 kA

NOTE: The core details, accuracy, burden and other details shall be decided during detailed engineering stage. Please ensure 0.2 accuracy class for ABT metering core.

Potential transformer, design, Temperature rise and testing etc. should be in accordance with IEC: 186

The PTs should be single phase, oil immersed, self-cooled type suitable for outdoor installation of 33 kV class required. The core should be of high grade non ageing electrical silicon laminated steel of high permeability. The PTs should be hermetically sealed to eliminate breathing and prevent air and moisture entering the tank. Oil level and pressure releasing device etc. should be provided.

Temperature Rise

The maximum temperature of the windings, cores etc. should not exceed 45°C over ambient, while max. Temperature of oil at top should not exceed 35°C over ambient. The PTs should be suitable for mounting on steel structures. All nuts, bolts, flanges and base should be hot dip galvanized. The terminal connectors should be such as to give intimate contact between conductor & terminal and offer protection against and effects of electrolytic and atmospheric corrosion and should also have sufficient mechanical strength. The connectors should conform IS 5556: 1970.

TERMINAL BOX:

The materials used for the terminal boxes shall possess excellent mechanical and electrical properties. The terminal blocks shall be rigid and shall withstand handling while making repeated terminations. The terminal blocks shall be of stud type (Bolt and nut type) and shall be suitable for 6 sq. mm cable of reputed make. Each unit shall be complete with copper terminal studs, nuts and washers together with label carriers, with blank label strips and suitable cable lugs. The terminal

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 22 OF 58

	block shall be mounted on galvanized rolled steel strip of sufficient length and size which acts as a support bar for fixing on hylem sheet of 10 mm thick brass studs. Each terminal block shall be suitably numbered. Spare terminals shall also be provided for future use. Then terminal studs, nuts, washers and links shall be made of best quality copper and shall be suitable for copper conductor of size 6 sq. mm. Sufficient quantity of suitable size cable lugs for copper conductor of size 6 sq. mm shall be supplied. All terminal blocks shall be designed for voltage rating of 1100 volts and continuous current rating of 25 A, AC or DC. The terminals shall be of good mechanical construction providing adequate electrical contact for the appropriate size of the copper cable used. Terminal connectors shall be such that the conductors may be connected by screw or other equivalent means to maintain the necessary contact pressure permanently. Terminals shall not run or be displaced when the connecting screws are tightened and the conductor shall not become displaced. Terminals shall be so mounted that the appropriate wire or cable may be connected without impairing the normal performance of the unit. No contact pressure shall be transmitted through insulating material and the gripping of the conductor shall take place between metal faces. EARTHING TERMINAL : Two numbers of 12 mm diameter brass bolts and nuts with spring washers for each box shall be provided by the side of the body of the terminal box for fixing copper /GI 50X 6 mm flat. The earthing terminal shall be identified by means of the sign marked, in a legible and indelible manner on or adjacent to the terminal. TESTS : Routine tests shall be carried out on PTs as per relevant standards and type test reports shall be submitted for a similar (33KV class) PTs. D) Specification for 30KV Lightning Arresters: TYPE AND SYSTEM DATA: The lightning arresters shall be of 30 KV, gapless metal oxide and suitable for outdoor operation under system and climatic conditions as specified in the tender specifications without protection from sun and rain. STANDARDS: The lightning arresters and associated accessories shall conform to the requirement of the latest IS: 3070 (part-I), IEC:99-4 for the gapless metal oxide lightning arresters. PARAMETERS: <table border="0"> <tr> <td>a)</td><td>Type</td><td>: Gapless metal oxide, Outdoor type</td></tr> <tr> <td>b)</td><td>Rated Voltage of Arrestor</td><td>: 30 kV</td></tr> <tr> <td>c)</td><td>Nominal system voltage</td><td>: 33 kV</td></tr> <tr> <td>d)</td><td>Nominal discharge current (8/20 micro sec. impulse)</td><td>: 10 KAp</td></tr> </table>	a)	Type	: Gapless metal oxide, Outdoor type	b)	Rated Voltage of Arrestor	: 30 kV	c)	Nominal system voltage	: 33 kV	d)	Nominal discharge current (8/20 micro sec. impulse)	: 10 KAp	
a)	Type	: Gapless metal oxide, Outdoor type												
b)	Rated Voltage of Arrestor	: 30 kV												
c)	Nominal system voltage	: 33 kV												
d)	Nominal discharge current (8/20 micro sec. impulse)	: 10 KAp												

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 23 OF 58

	e) Maximum residual voltage at lightning impulse of 8/20 micro sec wave : As per IS 3070 g) Maximum continuous operating voltage : As per IS 3070 h) Line discharge class : 3 i) Single impulse energy capability : As per IS 3070 j) High current short duration test value : As per IS 3070 k) Pressure relief device : Class A DEFINITIONS: For the purpose of this specification, all technical terms used herein shall have the meaning as defined in IS: 3070(part-I), IEC:99-4 for gap less zinc oxide lightning arresters with latest revision thereof, if any. CONSTRUCTIONAL FEATURES The arresters shall be of modern design consisting of hermetically sealed units incorporating non-linear resistors (metal oxide) stacked vertically. The arresters shall be designed to have adequate thermal discharge capacity for severe switching surges, long duration surges and multiple strokes. The arresters shall be suitable for mounting on outdoor structures. Supporting structures, terminal connectors, grading ring and other components shall form part of the arresters. All metal parts shall be of non- rusting and non-corroding metal. Bolts, screws and pins shall be provided with lock washers, keys or equivalent locking facilities. All similar parts, particularly removable ones shall be interchangeable. Self contained discharge counter, requiring no auxiliary battery supply shall be provided for each single pole unit. The terminals shall be robust and shall be located such that incoming and outgoing connections could be made with minimum possible bends. Suitably sized by pass shunts of copper to facilitate by passing the discharge counter shall be designed and supplied. The design of the terminal connectors shall permit the connection of these units. A leakage current detector as an integral part of the discharge counter shall be provided. The value of the leakage current beyond which the operation is prohibitive shall be clearly indicated in red colour on the detector. The arresters shall be provided with pressure relief diaphragm at both ends. Corona rings wherever used shall be of non- magnetic materials. Lightning arresters shall be gapless metal oxide hermetically sealed type, of self-supporting construction and base mounted suitable for mounting on steel structures. They shall have adequate thermal discharge capacity for various types of surges. The lightning arresters shall be capable of withstanding the internal pressures developed during discharges without operation of the pressure relief devices or should safely vent the internal pressures associated with arrester failure without shattering. Insulator housing shall be porcelain having adequate mechanical strength and integrity. Arrester housing shall withstand short circuit, wind, seismic and other forces during operation. Arresters shall incorporate anti contamination feature to prevent arrester failure	
--	---	--



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 24 OF 58

consequent to uneven voltage gradient across the stack in the event of contamination of the porcelain. The arrester shall be protected against the ingress of moisture.

Surge counter should be supplied with the insulating bases for connection. No radio interference shall be caused by the arresters operating at the normal rated voltages.

RECTANGULAR WAVE SHAPE CURRENT

The arrester shall withstand surges of low magnitude rectangular wave shape currents of long duration arising from switching surges or accumulation of static charges from atmosphere.

INSULATING CASING:

The insulating casing shall conform to IEEE No.-A C-76-1-64 with latest amendments. Insulating casing shall be made of wet process, nonporous electrical porcelain, free from imperfection and moisture absorption, vitrified and finished with brown glaze and designed to keep the insulator surface from contamination by natural action of wind and rain. The leakage distance along with external surface shall be large to ensure that the surface contamination likely to deposit in the specified weather conditions shall minimize radio interference.

The complete bushing insulator casing per pole of the arrester shall withstand the following insulator insulation tests:

Insulation class of bushing	: 33 kV
Power frequency withstand	
1 Min. dry	: 70 kV rms.
1 Min. wet	: 70 kV rms.
Lightning impulse voltage withstand	: 170 kV peak

NOTE: The insulator of each unit arrester of which the pole arrester is stacked shall withstand pro rata voltage specified above in proportion with the ratio of the number of elements housed in the unit arrester to the total number of them in each pole arresters.

TYPE OF MOUNTING

Lightning arresters shall be suitable for mounting on steel/concrete support structures/poles to be supplied. The necessary flanges, foundation bolts or clamp, nuts washers etc., for the base of arresters shall be supplied and these shall be hot dip galvanized. Insulating bases required for mounting of the arresters with attachment of surge counters shall be supplied.

SUPPORT STRUCTURES / CONCRETE POLES

The vendor shall supply along with the LAs all the support structures/ concrete poles and foundation bolts, nuts and washers required. The minimum clearance of live terminal of the equipment to ground shall be 3700 mm. The galvanized steel support structures / concrete poles shall in general conform to the latest edition of IS.

FITTINGS AND ACCESSORIES:

Arresters shall be complete with insulating base for connection of discharge counter and provision for bolting to the supporting structure (pedestal)
Self contained discharge counter, suitably enclosed for outdoor use weather and

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 25 OF 58

	waterproof and requiring no external supply shall be provided for each 30 kV arrester. The discharge counter shall have a glass window. Suitably sized links of copper to facilitate bypassing of discharge counter shall be provided. The terminal connectors shall have provision for connection of these links. The conductor between lightning arrester earth terminal to the discharge counter terminal shall be insulated for a minimum of 4 kV and required length of insulated conductor shall be supplied along with the arrester. It shall not require sealing ends or plumbed joints at their ends for terminations. Arresters shall be supplied with clamps/connectors on line terminal, earth terminal and the discharge counter terminals along with galvanized steel support structures/concrete poles with bolts, nuts etc., including foundation requirements. Suitable bimetallic type connectors, if any, to receive ACSR Coyote conductor shall be provided and shall be suitable for both horizontal and vertical connections. TESTS The manufacturer shall submit a copy of the type test certificate for the similar type of arresters for the purchaser's reference. If the type test are not conducted, the same shall be conducted free of cost and test reports furnished for the approval of purchaser. The lightning arrester shall comply with the tests prescribed in IS & IEC specifications. The manufacturer shall conduct the following tests on all lightning arrester at their works, in the presence of purchaser's representative, if so desired by the purchaser, as per the latest edition of IS & IEC specifications: Routine tests: All routine tests shall be conducted on the arrestors by the supplier and test certificates furnished. The following Acceptance tests on complete lightning arrester shall be conducted: - Measurement of power frequency reference voltage. - Measurement of lightning impulse residual voltage. - Measurement of partial discharge. - Visual and dimensional checks. - Test on discharge counter. - Switching surge, residual voltage tests. E) Specification for Switchyard structures: Support structure suitable for 33 KV switchyard equipment shall be fabricated from structural steel conforming to IS 2062(latest). GOS isolators shall be mounted on 2-Pole/4-Pole/6-Pole structures by employing Pre-stressed concrete poles. Adequate height of all the structures must be provided to maintain proper clearances. Additional structures called stools shall be provided between the equipment and its support structures to match the bus bar height. The top of stool shall be connected to the equipment and the bottom of the stool shall be connected to the support structures. All fabrication drawings of structures shall be furnished to BHEL for Prior Approval. The scope shall include all types of bolts, nuts, shackles, clamps, step bolts, inserts in concretes, gusset plates, equipment mounting bolts, structure earthing bolts, foundation bolts, spring washers, fixing plates, angles and bolts.	
--	--	--



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 26 OF 58

The connection of all structures to their foundations shall be by base plates and embedded anchor/ foundation bolts. All steel structures and anchor/foundation bolts shall be fully galvanized. The weight of the zinc coating shall be as per the standard for anchor/ foundation bolts and for structural members. One additional nut shall be provided below the base plate, which may be used for purpose for leveling.

The fabrication drawings to be prepared and furnished by the vendor shall indicate complete details of fabrication splicing details, lacing details, weld sizes and lengths. The fabrication work shall start only after the owner accords final approval to the fabrication drawings.

Fabrication of Steel

The fabrication and erection works shall be carried out generally in accordance with IS:802 (latest). A reference however may be made to IS:800 (latest) in case of non-stipulation of some particular provision in IS 802 (latest). All materials shall be completely shop fabricated and finished with proper connection material and erection marks for ready assembly in the field.

ASSEMBLY

The component parts shall be assembled in such a manner that they are neither twisted nor otherwise damaged and shall be so prepared that the specified member, if any, is provided. In order to minimize distortion in member the component parts shall be positioned by using the clamps, clips, dogs, jigs and other suitable means and fasteners (Bolts & welds) shall be placed in a balanced pattern. If the individual components are to be bolted, paralleled and tapered, drifts shall be used to align the part so that the bolts can be accurately positioned.

BOLTING

Every bolt shall be provided with a spring washer under the nut so that no part of the threaded portion of the bolt is within the thickness of the parts bolted together. All steels, bolts, nuts and washers shall be hot dip galvanized. 2% extra nuts and bolts shall be supplied for erection.

Welding

The works shall be done as per approved fabrication drawing which clearly indicate various details of joints to be welded, type of weld, length and size of weld, whether shop or site weld. Symbols for welding on erection and shop drawings shall be according to IS 813. Efforts shall be made to reduce site welding so as to avoid improper welding due to construction difficulties.

Foundation Bolts

Foundation Bolts for equipment supporting structures and elsewhere shall be embedded in first stage concrete while the foundation is cast. The vendor shall ensure the proper alignment of these bolts to match the holes in the base plate.

The vendor shall be responsible for the correct alignment and leveling of all steel work on site to ensure that the towers/structures are plumb.

All foundation bolts for lattice structure, pipes structure are to be supplied by the vendor.



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 27 OF 58

All foundation bolts shall be fully galvanized so as to achieve 80 microns. of Zinc coating as per IS-4759.

Stability of structure

The supplier shall be responsible for the stability of the structure at all the stages of its erection at site and shall take all necessary measures by the additions of temporary bracings and guying to ensure adequate resistance to wind and also to loads due to erection equipment and their operations.

Grouting

The method of grouting the structure column bases shall be subject to approval of owner and shall be such as to ensure a complete uniformity of contact over the whole area of the steel base.

Galvanizing

All structural steel works and single pipe supports shall be galvanized after fabrication as per IS 2629(Latest). Zinc required for galvanizing shall have to be arranged by the manufacturer. Purity of zinc to be used shall be 99.5% as per IS:209 (Latest revision).

F) Specification for ABT meters:

Two numbers of three phase 4 wire energy meters as main & check shall be ABT compliant along with necessary test terminal boards (TTB's) to facilitate CT & PT connections shall be supplied at solar plant end to measure the energy transmitted via the 33 kV line.

Three numbers of three phase 4 wire energy meters as main, check and standby along with necessary test terminal boards (TTB's) to facilitate CT & PT connections shall be supplied at 33KV grid substation end to measure the energy.

The energy meters supplied shall be of microprocessor based trivector meter. The energy meter shall measure, record and display energy related parameters like MW, MVA, MVAR, MWH (Import), MWH (Export), MVARH (while active import) and MVARH (while active export) and Reactive MVARh net for voltage low condition & maximum demand of active import & Active export, reactive lag while active import, apparent while active import & Apparent while active export. In addition, instantaneous phase parameters like voltage, current and power factor are also to be recorded. The accuracy class of energy meter shall be 0.2s. The energy meter shall be suitable for the measurement of alternating current electrical energy of frequency in the range of 47.5 Hz to 52.5 HZ (Nominal frequency 50 Hz) for three phase, 110V System. The limits of errors shall be as per IS 14697. The meter shall be suitable for balanced or unbalanced loads and work at all power factors. The CT and PT ratios shall be programmable.

It shall be possible to couple this device to meter testing equipment. Voltage healthiness in all the phases shall be provided suitably on the meter display in the form of phase blinkers. Meters shall have a distinct code which shall be marked permanently on its front, as well as in its memory. The meter shall have an alpha numeric LCD display of minimum 7 digits. The meter shall be capable of storing 15 minutes data (load survey data) for at least 35 days.



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 28 OF 58

G) Specification for ACSR conductor:

ACSR Coyote conductor for bus bar and intra equipment connection shall be supplied.

CODES AND STANDARDS

The conductors shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment will be installed. The equipment shall also conform to the latest applicable standards. Nothing in this order shall be constructed to relieve the Vendor of this responsibility.

The conductors shall conform to latest relevant specified in the enclosed. In case of conflict between the standards and this offer, this Specification shall govern.

MATERIAL

Aluminum strands of ACSR conductor shall be hard drawn from 99.5% pure electrolytic Aluminum rods with 60 % TACC conductivity. The vendor shall specify the guaranteed minimum and average values of conductivity. Chemical composition of the material shall comply with the requirements of relevant standards.

The surface of conductor shall be clean and dry and free from any excess grease that may be used in its fabrication. The surface strands shall be smooth and free from burrs and other projections which may be cause for increasing corona losses when the conductor is used on extra high voltage lines.

GALVANIZING

The steel wire strands of ACSR conductor and steel conductor shall be hot dip galvanized. Zinc coating shall be evenly and uniformly coated complying with relevant standards.

TESTS

All tests required on the required number of samples of raw materials and finished conductor as stipulated in the relevant standards shall be carried out.

PACKING

Conductor shall be wound on wooden drums made of sufficiently strong wood, and conforming to relevant standards from the conductor to outer edges of the drum shall be provided prior to lagging.

All drums shall be painted inside and outside with Aluminum paint. All drums shall have a layer of water-proof paper around the drum under the conductor and another layer over the conductor and under the lagging.

In addition to manufacturer's standard marking on the drums, batch of manufacture shall be clearly marked on each drum.

H) Specification for Insulators:

The porcelain shall be sound, free from defects, thoroughly vitrified and smoothly glazed. Insulators shall have compression type glaze with a good luster and of uniform brown color. The glaze shall be unaffected by sudden changes in temperature and by atmospheric pollution of Ozone, acids, alkali, dust etc.

Under surfaces and grooves shall be shaped for easy cleaning. Shells shall be substantially symmetrical in shape without appreciable warping. Tie wire grooves of pin insulators shall be formed to provide a firm support for the conductor and

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 29 OF 58

	permit the making of a secure tie. Insulators shall be designed to avoid excessive concentration of electrical stresses in any section or across leakage surfaces. Design features which increase radio influence level shall be avoided. Each insulator shall have the rated strength marked clearly on the metal cap before galvanizing. Each insulator shall also have symbols identifying the manufacturer, month and year of manufacture etc. All metal parts shall be made of good commercial grade malleable iron, or open hearth or electric furnace steel, hot dip galvanized conforming to relevant standards. Castings shall be free from blow holes, cracks and such other defects. Strain and suspension string shall comprise the conventional ball and socket type disc insulators. Individual insulators as well as strings of the same type shall be interchangeable with one another and it shall be possible to form either suspension or strain strings using the same discs. The locking clips shall be made of phosphor bronze and shall provide positive locking of the coupling. The design of insulators shall be such as to avoid the following - Stresses due to expansion and contraction in any part of the insulator shall not lead to deterioration. - Stress concentration due to direct engagement with metal fittings - Retention of water in the recesses of metal fittings - Shapes, which do not facilitate easy cleaning by normal methods.	
5.18	Cable trench and laying of power cables (both HT and LT cables) and OFC cables (1) Vendor shall construct underground cable trench for laying HT and LT cables in switchyard and array yards as listed below. Outline of switchyard and overall plant layout is enclosed. Trench shall be constructed: - Between the inverter transformers and 33KV outdoor CT (3 runs of 1CX300 sq-mm cables) – 4 sets (one set each for one transformer). - Between the outgoing isolator in inverter room switchyard and outdoor CT located in control room switchyard (3 runs of 1CX300 sq-mm cables) -1 set. - Between the 100kVA auxiliary transformer located in the switchyard adjacent to control room to the entry point of control room wall bordering the switchyard (3.5Cx95-mm for connecting LV side of transformer to ACDB panel in control room). - Between the outgoing feeder of control room switchyard and the GOS mounted on two pole structure at plant boundary (3 runs of 1Cx300 sq-mm). Cable termination shall be in the scope of vendor. 1.1KV, 3.5 core cables of suitable sizes between the ACDB located at control room and Inverter room DB (IRDB) located at inverter room and from ACDB to security room DB. (2) Vendor shall construct underground cable trench for laying 2 runs of OFC cables from inverter room to Control room for communication between SCADA panels. The distance between HT cable trench and OFC cable trench shall be maintained as per relevant standards. Each run of OFC cables shall be laid in separate HDPE DWC pipe of min. ID 25mm which is to be supplied by vendor. Supply and termination of OFC cable shall be in the scope of BHEL. Laying of OFC cables shall be in the scope of vendor. (3) Supply of following cables shall be within vendor scope of supply. Specification of cables is as follows: - LT Cable, 3.5Cx95 sq-mm, 1.1KV, Al conductor, PVC insulation, armoured, PVC sheath as per IS: 1554 (latest edition) part-1. - LT cable of suitable size 3.5C, 1.1KV, Al conductor, PVC insulation, armoured, PVC sheath as per IS: 1554 (latest edition) part-1 from ACDB to IRDB and ACDB to security room DB.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 30 OF 58

	(4) LT Power Cable shall be 1100V, grade, single / multicore, stranded aluminum conductor, XLPE, insulated with PVC inner sheath and outer sheath made on FRLS PVC compound. The armouring will be of Aluminum / galvanized steel round wire/ flat strip as per IS. (5) Vendor shall lay these cables layer wise providing adequate separation as per the relevant IS standards. Vendor shall indicate the IS standards employed. (6) Half-cut RCC hume pipes shall be provided over HT cables in switchyard. (7) Trench layout and trench drawings shall be submitted to BHEL for approval.	
5.19	Power cable terminations on AC HT side (33KV) (1) Vendor shall carry out HT power cable terminations on HV side (33KV) of 2700 kVA transformers (4 sets) and outdoor CTs/Isolators using 3 runs of 1Cx 300 sq-mm cables as indicated in SLD. Cable lugs, HT termination kits and all necessary hardware, all of which shall be within vendor scope of supply. HT termination kits shall be indoor / outdoor type suitable for 33KV, 1CX300 cable. Make: Raychem, 3M or reputed equivalent as shall be approved by BHEL. (2) Quantity of termination kits = 4 sets of indoor type for 33KV 1Cx300 sq-mm cable, 8 sets of outdoor type for 33KV 1Cx300 sq-mm cable. In addition, vendor shall supply 1 set of indoor and 2 sets of outdoor type termination kits as spare. Quantity indicated above is the exact requirement. Vendor shall ensure procurement of additional quantity of termination kits, if required at no additional cost to BHEL to tide over any contingencies during installation. (3) Cable lugs and hardware shall be of dowell's / 3M or reputed equivalent as shall be approved by BHEL. (4) All tools and accessories required to carry out the termination shall be within the scope of vendor. (5) Since no cable glands are provided for these cases, vendor shall apply suitable grade of bitumen, RTV or any other sealant as shall be approved by BHEL, for sealing the gap around the cable at the cable entry of transformers and HT panels. (6) Vendor shall provide support mechanism using clamps and GI pipes for HT cables wherever required so that the connecting terminals are not damaged due to mechanical load of cable.	
5.20	Supply and installation of FCBC, Battery banks (2 sets- one each at inverter room and control room) One double float cum boost charger and one set of battery bank (Lead acid tubular type) are to be supplied and installed at each of inverter room and control room by the vendor. Battery bank shall be of 110 V rated at 10 hours discharge rate to be installed in a separate room constructed by BHEL. Vendor shall submit sizing calculations for battery, charger, GA and GTP of battery and charger for approval considering design margin, temperature correction factors and safety margins for approval. The vendor shall take the prior approval for all design, sizing and make of the batteries and FCBC. DC system will be used for electrical control of equipment and indications on the control panel, protection system, communication system and DC lighting. The battery shall be sized considering the following: 1. Momentary load for 1 minute 2. Emergency load for 2 hours 3. Continuous load for 3 hours Under normal conditions, the battery shall be on float charger. The float charger will be connected to a distribution board and meets the requirements of DC load. In case of additional demand of load on AC supply failure, the battery shall meet the	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 31 OF 58

	requirement of DC loads. The boost charger shall charge the fully discharged battery in 12 hours before bringing it back on float charge. 110V with suitable AH ratings with double float cum boost chargers each with inbuilt switch board shall meet the DC loads. The batteries shall be Lead Acid tubular type. The chargers with modern version of Thyristor controls shall be provided. The batteries provided shall be suitable for the control and protection, emergency lighting, operation of breakers, indications etc. and shall meet all the requirements of the plant wherever DC supply is required.	
5.21	Supply and installation of ACDB Panels (1 No.), IRDB panels (1 No.) and security room DBs (1 No.) The ACDB, IRDB, security room DBs are to be supplied by the vendor and is to be installed in the control room, inverter room and security rooms respectively. Vendor shall submit the single line diagram, GA drawing showing the details of feeders for internal lighting, module cleaning pumps, FCBC, Air conditioners, periphery lighting and other loads in the plant. Vendor shall ensure equal loading in all the three phases. The number of feeders and their capacity shall be decided in consultation with KPCL during detailed Engineering stage. AC distribution panels shall be made of sheet steel panel complete with all the equipments specified herein with 3-phase insulation aluminum busbar and neutral system self-supporting, free standing, steel doors at the front and rear, painted as per requirement, completely wired and provided with 16A, 3 pin power plug and sockets industrial type as required, cubicle heating by space heaters with thermostat and panel lighting. CONSTRUCTION FEATURES: The panels shall be of best quality CRCA sheet steel of 2mm SWG enclosed and shall be fully dust and vermin proof, providing a degree of protection of IP-20 for indoor DBs as per IS-2147/8623. Distribution boards shall be provided with hinged doors with handle and locking facility for switch on interlock of doors. Doors shall be gasketed all round with Neoprene gaskets. All accessible live connections / metals shall be shrouded and it shall be possible to change/replace individual MCB/Fuse units from the front of the board without danger of coming into contact with live parts space and suitable removable type cable entry plates shall be provided for top/bottom entry of cable through gland as specified. The DB shall have two earthing terminals each to suit the purchaser's earthing. These boards shall have space heaters, name plate, danger boards etc. The required cable glands for the cables shall also be supplied with DBs. The incoming MCCBS shall be hand operated, air break, quick make and quick break type with short circuit breaking capacity of not less than 50kA. The HRC fuses (provided as back up) shall also have the breaking capacity of not less than 50kA. Anodised aluminum plate engraved with finalized single line diagram shall be fixed on the doors of the distribution boards. The Outgoing MCBs shall conform to IS-8828 (latest edition) and shall have a minimum interrupting rating of 10 kA. The ACDB and IRDB shall be provided with of 3phase, 4 wire 0.5 class Multi-Function Meter (MFMs) for measuring auxiliary power consumption. The MFMs shall have a RS-485 Modbus communication port to communicate with the central PC system (SCADA).	
5.22	Supply and installation of UPS for PCUs, SCADA and emergency lighting Vendor shall supply and install 1No. 5KVA UPS in each of the control room and inverter room for auxiliary supply to PCUs, SCADA panels and emergency lighting. Vendor shall supply battery for UPS with a backup of 2 hours. Vendor shall submit	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 32 OF 58

	the sizing calculations for battery considering design margin, temperature correction factors and safety margins for approval.	
5.23	Supply, installation and commissioning of weather monitoring station Vendor shall supply and install Weather monitoring Station (WMS) on an independent structure on ground at a location near control room. Exact location shall be decided by BHEL during execution. WMS shall consist of Pyranometer (1 No.), Anemometer (1 No.), Module temperature sensor (1No.), Ambient temperature sensor (1 No.), Room temperature sensors (2 Nos.). All the sensors of WMS shall be provided with output of 4-20mA signal. Converters if any required for conversion of sensor output to 4-20mA shall be in the scope of vendor. All necessary communication/ signal cables required for termination of WMS sensors in SCADA panel shall be in the scope of vendor. Supply and installation of Galvanized Mounting structure for WMS along with civil foundation is in the scope of vendor. Approved makes: Kipp & Zonen/ Campbell Instruments / Aeron Systems / Dynalab / Metone / Hukeflex or any other reputed make as shall be approved by BHEL. BHEL approval shall be obtained for make and GTP prior to procurement. Detailed technical specifications of the equipment are given below. PYRANOMETER: 1. Spectral Response- 300 to 2800 nano meters. 2. Sensitivity- 8 to 20 $\mu\text{V/W/m}^2$ 3. Operating temperature range: 0 deg to +70 deg. 4. Resolution: Min +1W/m² 5. Output: Analog form 4-20 mA 6. Standard: ISO 9060 -second class or equivalent. 7. Maximum operational irradiance: 2000W/m² 8. Response Time (95%) : <30s 9. IP rating: IP65(minimum) Pyranometer shall be supplied with necessary cables. Sample calibration certificate with calibration traceability to World Radiation Reference (WRR) World Radiation Centre (WRC)/ IMD shall be furnished along with the offer. ANEMOMETER: Anemometer shall be 3-cup tubular stainless steel type. Velocity range shall be up to 45 m/s and accuracy limit of 0.5 m/s up to 10 m/sec. TEMPERATURE SENSORS: PT100 sensors mounted inside a radiation shield, communication cable of adequate length, temperature range: -40 to +60 deg C with accuracy of +/- 0.2degC.	
5.24	Supply and Installation of auxiliary transformer: Vendor shall supply and install 1 No. auxiliary transformer for catering to the internal auxiliary loads of solar plant. Auxiliary transformer shall be located at switchyard near control room. The supplied auxiliary transformer shall conform to the following technical specifications: (1) Outdoor, Oil immersion type, ONAN, 3-phase, Dyn11, 100kVA, 33KV/ 433V (+/- 10%), 50Hz +/- 3% transformer, Class A insulation, minimum percent impedance 4.5%, off-circuit tap changer with 5 taps from -5% to + 5% in steps of 2.5%, bushing on HV side and cable box LV side, as per IS: 2026 for auxiliary	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 33 OF 58

	power consumption to internal utilities of the power plant. (2) Electrical interconnections up to the transformer bushings on HV side shall be made using ACSR conductor. Termination kits shall be supplied by the vendor. (3) On LV side, suitable supporting arrangement shall be provided to route the cable, 3.5C X 95 sq-mm, Al conductor, armoured, 1100V, PVC insulation, PVC sheath cable as per IS: 1554 (part-1). The arrangement shall provide for suitable clips, clamps etc to ensure neat dressing of the cable. (4) Transformer shall be mounted on a suitable RCC foundation which is in the scope of vendor. The mounting arrangement and foundation details shall be submitted by the vendor for approval by BHEL. Vendor shall submit general arrangement and detailed drawings with bill of materials/ quantities with individual item description, quantity, make, specs / ratings etc for BHEL approval. (5) Height of foundation shall be as per KPCL/KPTCL/CEIG requirements. Approved makes: Schneider/ PETE/ Kamat/ Universal /Esennar or reputed equivalent, as approved by BHEL. Transformer includes all the mountings, fittings and accessories specifically described under this section and necessary spares as indicated. The Transformer shall be complete in all respects and include all components and accessories even though not specifically mentioned in the specification but which are essential for the satisfactory performance of the Transformer in accordance with the technical specification. The transformer shall be designed to facilitate operation, inspection, maintenance and repairs. All apparatus shall be designed to ensure satisfactory operation under such sudden variations of frequency, load and voltage as may be met with under working conditions, on the system including those due to short circuits. VIBRATION & NOISE The Noise level at rated voltage and frequency shall not be more than the specified level as per NEMA publication. SUPPRESSION OF HARMONICS The Transformer shall be designed with particular attention for the suppression of harmonic voltages. FREQUENCY & VOLTAGE VARIATION The Transformer shall be suitable for continuous operation with the frequency variation of +3% or -5% from normal 50Hz without exceeding the specified temperature rise. Further, the Transformer shall be capable of operating without injurious heating at rated KVA on any particular tapping provided that the voltage does not vary by more than +/-10% of the voltage corresponding to the tapping. GENERAL DESIGN AND OPERATING CONSIDERATIONS Duty under Fault Conditions Transformer shall be capable of withstanding short circuit currents without damage according to IS: 2026. Unbalanced loading from the transformers is anticipated and the transformers shall be designed for operation at unbalanced loading conditions. Transformers shall be free from partial discharges over the range of operating voltages.	
--	--	--

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 34 OF 58

	Over Fluxing The transformers shall be suitable for over fluxing up to 10% without injurious heating. The maximum flux density in any part of the core and yoke of the transformers at normal voltage and frequency shall be such that the flux density under the over voltage conditions of 110% continuously of the rated voltage of any tapping shall not exceed 1.9 Tesla. CONSTRUCTION AND MATERIALS Core The core shall be constructed from high-grade, cold rolled, non-ageing, low loss and high permeability grain oriented silicon steel laminations. The material shall conform to the latest edition of relevant IEC / IS. The core laminations shall be annealed after removing all sharp projections and each lamination shall be coated with durable baked enamel / glass insulation. The complete core shall be coated with special resin as a protection against corrosion. The core shall be rigidly clamped and bolted to ensure adequate mechanical strength and to prevent vibration/noise during operation. The bolts used in the assembly of the core shall be so constructed that eddy current flow is minimum. The design of the magnetic circuit shall be such as to avoid static discharges, development of short circuit paths within itself or to the earthed clamping structure and the production of the flux components at right angles to the plane of the laminations which may cause local heating. The insulation of core to bolts and core to clamp plates shall be able to withstand a voltage of 2kV rms for one minute. The core shall be provided with lugs suitable for lifting the complete core and coil assembly of the transformers. Windings All windings shall be fully insulated. Neutral points shall be insulated for voltages specified in IS: 2026. The windings shall be designed to reduce the out-of balance forces to minimum in the transformer at all voltage ratios. The insulation at transformer windings and connections shall be free from insulating composition liable to soften, core out, shrink or collapse. The stacks and winding shall receive adequate shrinkage treatment before final assembly. The high and low voltage windings shall be of copper conductors. The entire coil shall be epoxy resin encapsulated, cast under vacuum. The insulation system shall be of uniform glass-fibre epoxy laminated of highest electrical and mechanical quality into which the windings are voidlessly embedded. Both the HV & LV windings of one phase shall be separately cast as one rigid tubular coil having no link between their coaxial arrangement i.e. no creepage path can be formed even under dusty and corroding ambient conditions. The insulation laminates shall correspond to class B as per IS: 2026. Precautions shall be taken that the thermal stresses do not prove detrimental to the insulation of winding.	
--	---	--

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 35 OF 58

	The winding shall not absorb any moisture and shall be suitable for tropical climate and 95% air humidity. The coils shall be hardly inflammable and shall be self-extinguishing in case of transformer catching fire. The windings shall be clamped securely in place so that they will not be displaced or deformed during short circuits. The assembled core shall be vacuum dried. Terminal Connections The HV terminals (Bushing) shall be connected to the 33 kV Bus. Removable links shall be provided. Cable box suitable for PVC / XLPE cables of adequate size shall be provided on LV side. LV neutral bushing shall be provided for neutral earthing at transformer end. Earthing Terminals Two earthing terminals each capable of carrying short circuit current of the transformers for two seconds shall be provided at bottom at two corners of the transformer enclosure. The earthing terminals shall be suitable for bolted connections to the grounding. Bushings The bushings used in the transformers shall comply with latest edition of IS: 2099, IS: 3347, IEC 60237 or any other equivalent International Standard. The bushing shall be of solid porcelain / epoxy case resin type. The bushing shall have high factor of safety against leakage to ground and shall be located so as to provide adequate electrical clearance between bushings and between bushing and ground parts. Bushings of identical voltage shall be interchangeable. All bushings shall be equipped with suitable terminals of approved type and size and all external current carrying contact surfaces shall be properly surface treated. Tappings Tappings will be provided for voltage adjustment on the HV winding with adjustment of high voltage of + 5% to – 5% in steps of 2.5% for all the transformers. Off circuit tap changer shall have bolted link type arrangement and the links shall be completely shrouded and no live parts shall be exposed. Cooling: All transformers shall be suitable for working outdoor and shall conform to IS: 11171 with ONAN cooling type. Painting The internal and external surfaces of enclosure and structural steel work to be painted shall be shot or sand blasted type to remove all rust, scale, foreign adhering matters, etc. All steel surfaces exposed to weather shall be given a primary coat of zinc chromate, second coat of weather resistant varnish of a color distinct from primary and final two coats of weather resisting color paint to be finalized during detailed engineering.	
--	--	--

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 36 OF 58

Galvanizing All galvanizing shall be done after fabrication by the hot dip method. Marking of Parts Each part of the equipment shall be properly marked to ensure easy identification and to facilitate correct assembly and erection in the field. FITTINGS AND ACCESSORIES General The following fittings and accessories shall be provided on each transformer together with such other fittings and accessories which are necessary for satisfactory installation, operation and maintenance of the transformers. The fittings and accessories shall conform to relevant IS/IEC wherever exists. - Rating plates bearing data such as Type, applicable standard, Manufacturer's serial number, Year of manufacture, No. of phases, Rated power, Rated frequency, Rated voltage, Rated current, Percentage impedance voltage at rated current at principal & extreme taps, Type of cooling, Connection diagram, Total weight and dimensions, core + coil weight, Temperature class of insulation, etc. - A diagram plate showing the internal connections and also the vector relationship of the windings in accordance with requirements of standards and in addition to the plan view of the transformers, giving the correct principal relationship of transformer. - Suitable HV & LV terminals to suit the terminal arrangements. - Under carriage with four nos. plain bi-directional rollers with locking and bolting devices. - Jacking lugs. - Transformer clamping / fixing devices against earthquakes. 2 Nos. earthing terminals. - Enclosure lifting eyes, transformer-lifting lugs, core and winding lifting lugs, skids and pulling eye on both sides. - Any other accessories or appliances recommended by the manufacturer for the satisfactory operation of the transformer together with their prices shall be supplied. - Off circuit tap changing equipment TESTS The following tests will be carried out on the transformers as per IS/IEC Routine Tests - The following shall constitute the routine tests: - Measurement of winding resistance at all taps. - Measurement of voltage ratio at all taps and check of voltage vector relationship and polarity. - Measurement of insulation resistance. - Induced over voltage withstand test. - Separate source voltage withstand test. - Measurement of impedance voltage/short circuit impedance and load losses at principal and extreme tap.	
--	--

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 37 OF 58

	h) Measurement of no load losses and current at 90%, 100% & 110% rated voltage. i) Core isolation test. j) Capacitance and Tan delta measurement test. k) Repeat measurement of no load loss & current after dielectric test. l) No load current at 415V. m) Magnetic balance test. n) Partial discharge test. Field Tests The scope of tests during and after erection includes: - Checking of correctness and completeness - Checking of quality of porcelain parts, seals and external surfaces - Checking of connections with earthing system - Checking of bolt connections with a spanner - Checking of correctness of phase alteration - Checking of correctness of tap changer - Measurement of insulation resistance - Testing of insulation of all LV circuits EFFICIENCY The transformer shall be so designed that the efficiency load characteristics shall be as flat as possible between 50% and 100% rated capacity. The efficiency figures shall be guaranteed as per IS: 2026 but without tolerances allowed therein. GUARANTEE FOR LOSSES The no-load loss in Kilowatts, the load loss in Kilowatts at rated output, rated voltage, rated frequency and at 75°C temperature shall be specified and guaranteed without any tolerance. SPARES List of mandatory spares to be supplied are as follows: - HV bushing complete with gaskets, etc. :1 set (3 Nos per set) - LV bushing complete with gaskets, etc. :1 set (3 Nos per set) - Neutral bushing complete with gaskets, etc. : 1 No.	
5.25	Power cable terminations at 100kVA transformer and ACDB panel: - Vendor shall carry out termination on HT side of 100 kVA auxiliary transformer using ACSR conductor. Supply of ACSR conductor, lugs and hardware shall be in the scope of vendor. - Vendor shall carry out termination on LT side of 100kVA auxiliary transformer (33KV /433V) using 3.5Cx 95 sq-mm, Al conductor, armoured, 1100V, XLPE insulation, PVC sheath cable as per IS: 1554 (part-1), Cable glands, cable lugs, bolts, nuts, plain washers and spring washers. All these items including cable shall be within vendor scope of supply. - Similar terminations shall be carried out on the other end of cable that gets terminated at ACDB panel kept within control room. Vendor shall supply the necessary cable glands, cable lugs and hardware for ACDB end as well.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 38 OF 58

	(4) Quantity of 3.5CX95 sqmm cable ~ 50m. (5) All tools and accessories required to carry out the termination shall be within the scope of vendor.	
5.26	Erection of switchyard fencing with gate. Vendor shall provide all around chain-link fencing to the switchyard with gate at four different locations as indicated in the layout. - Gates shall be with following details: - MS gates - 4 Nos each of 1.5m width. - Other necessary details such as hinges, padlocks, wheels etc shall be considered. - Gate shall be finished with red oxide (one coat) and paint of approved colour and type. - Frame of 50x50mm MS pipes with 4mm thick - Vertical grills of 16mm square bar at 120mm c/c - Vendor shall submit drawing of the fencing with gate for BHEL approval. - Height of fencing shall be as per relevant CEA regulations/standards. - Civil works for fencing, supply and erection of fencing shall be in vendor's scope.	
5.27	Switchyard leveling, jelly spreading (1) After installation of switchyard equipment such as transformers, PCVCB, CT, PT, GOS, RSJ poles, vendor shall level the ground with an appropriate magnitude and direction of slope to facilitate draining of rain water away from switchyard. Accordingly, to prevent stagnation of water within switchyard, vendor shall, wherever necessary, fill up the land with suitable soil and compact the filled-up portions either manually or with rollers, as applicable, as per site conditions, to achieve required slope. (2) Stone jellies of 20mm or 40mm shall be spread uniformly with a layer of minimum 100 mm thick throughout the switchyard area.	
5.28	Support and assistance for SCADA integration for the power plant (1) SCADA of power plant comprises of data station panel and PC based control desk with software to collect, store, process and report the data parameters of power plant as follows: - String monitoring boxes in solar array field: string current, voltage, box temperature, module temperature, status of SPD and load break switch in SMBs - Weather monitoring equipment: solar irradiation, ambient temperature, wind velocity. - Power conditioning units: DC input /AC output parameters of inverters, grid data, fault status and events logged, etc 33KV switchyards: status of breakers, status of protection relays of transformers, oil/winding temperatures, energy export to the grid from ABT meters etc. (2) Vendor shall provide support and assistance to BHEL in following activities: - Formation of underground cable trenches and cable laying and termination for data communication cables from SMBs to SMBs (daisy chain) and OFC cable from SMBs to SCADA, from transformers/ VCB panels / C&R panels to SCADA, OFC cable from inverter room to control room. - Data cable laying from PCUs, VCBs, ACDB, IRDB panels to SCADA. - Data cable terminations at PCUs, ACDB panels, transformers and VCB panels. - Laying and termination of Optical fiber cables including splicing in SCADA panels at inverter room and Control room and at SMBs.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 39 OF 58

5.29	Cable trenches for laying data communication cables (RS485) and Optical Fiber Cables (OFC) from SMBs to inverter room / control room. (1) Data communication (RS 485) cables shall be laid between SMBs to form daisy chain loop (Not more than 10 SMBs in one loop) and from the end SMB of each loop, optical fiber cable shall be laid to the SCADA panel in the inverter room/ control room. Communication and OFC Cables shall be laid in HDPE DWC pipes of minimum ID 25mm. (2) Supply of communication and OFC cables shall be in BHEL scope. Supply of DWC pipes shall be in vendor's scope. (3) These data / OFC cables shall be laid underground using separate cable trench. In other words, these cables shall not be laid along with power cables. A minimum distance of 500mm shall be maintained between the data cable trench and power cable trench to avoid EMI interference. (4) Underground laying shall be ensured even within the daisy-chain looping between adjacent SMBs. (5) Cable trench shall be as per details below: (a) Trench depth = 600mm minimum (b) Trench width shall be 200mm minimum (c) Bottom layer shall be sand as per IS: 383 with 100mm layer thickness. (d) Data cable shall be laid over the sand. (e) Another layer of sand, 100 mm thick, shall be laid. (f) A single layer of brick, class-2, 75mm thick, shall be laid over the sand. (g) Trench, then, shall be filled up with refill soil and compacted.	
5.30	Cable trench and laying of data communication cables in switchyard (1) Following are the data cables in switchyard (a) Transformers C&R panels (b) C&R panels to VCB panels (c) VCB panels (or C&R panels to SCADA (d) Transformers to SCADA (2) These data cables (details under following section), which are within the vendor scope of supply, shall be laid underground as follows: (a) Trench depth = 600mm minimum (b) Trench width shall be 200mm minimum (c) Bottom layer shall be sand as per IS: 383 with 100mm layer thickness. (d) Data cable shall be laid over the sand. (e) Another layer of sand, 100 mm thick, shall be laid. (f) A single layer of brick, class-2 (burnt clay type), 75mm thick, shall be laid over the sand. (g) Trench, then, shall be filled up with refill soil and suitably compacted.	
5.31	Data & Control cable terminations in control room and switchyard (1) Vendor shall carry out following data cable terminations at 2700 kVA transformers, VCB panels, C&R panels, ACDB panels and PCUs. (2) Terminations at marshalling box of 4 sets of 2700kVA transformers and VCB panels/ C&R panels (Buchholz relay, pressure release valve, low oil level, WTI, OTI etc). RS485 cable for MFM and numerical relay to SCADA shall be supplied by BHEL. (3) Terminations at VCB panels/ C&R panels (Buchholz relay, pressure release valve, low oil level, WTI, OC/EF relay, OV/UV relay, MFM etc) for SCADA. (4) Terminations at 8 PCUs of 1250kW for RS485 MODBUS communication over TCP/IP cable connections using LAN cables. Supply of LAN cable is in BHEL scope. (5) Terminations at ACDB and IRDB panels. (6) All the cables required for the above terminations except for PCUs shall be	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 40 OF 58

	within vendor scope of supply. Cable specification as follows: Cable, 1.1kV grade, copper conductor, stranded, PVC type-A insulation, twisted pair, overall shielded with aluminium backed mylar sheet, inner sheath of extruded PVC type ST1, Galvanized steel strip / round wire armoured as per IS, outer sheath of extruded FRLS PVC type ST1, conforming to IS:1554 / part-1 with latest amendments up to date. (7) Vendor shall submit the cable schedule for data, control and communication cables. Control cables shall be 2.5 sq-mm minimum, copper conductor, PVC, armoured. Communication cables shall be 0.5 sq-mm minimum, copper conductor, PVC, armoured. (8) Supply and termination of control cables from VCB panels/ C&R panels to transformer: 12core X 2.5 sq-mm ~200m. (9) Vendor has to lay the control cable from each transformer to VCB panel / C&R panels with 12Cx2.5 sq.mm cable. Cable Specification is as follows: Cable, 1.1kV grade, copper conductor, stranded, PVC type-A insulation, ATC drain wire of 2.5 sq.mm, inner sheath of extruded PVC type ST1, Galvanized steel strip / round wire armoured as per IS, outer sheath of extruded FRLS PVC type ST1, conforming to IS: 1554 / part-1 with latest amendments up to date. (10) Make of cables: Polycab, Advanced cables, Lapp, KEI or any other reputed equivalent as shall be approved by BHEL. (11) Cable lugs and all hardware required for making the above terminations shall be in vendor scope of supply. Note: Along with the above activities, DC/AC power supply cable laying and terminations shall be also be carried out for transformers, VCB panels and C&R panel using 2Cx2.5 sq-mm copper, armoured, PVC cables which is in vendor scope of supply. Cable shall be laid from FCBC (for DC) and ACDB/IRDB panel (for AC).	
5.32	Earthing of solar array structures (1) Vendor shall interconnect solar array structures using welding of min. 25x3 mm GI strips. (2) Every row of such interconnected structures shall be terminated in a chemical earthing electrode of 3000 mm long, hot dip galvanized and metal coated for rust proof, OD of minimum 50 mm shall be supplied by vendor. (3) Vendor to ensure that every earthed structure is provided with two alternate paths to earth. Accordingly, vendor shall provide suitable number of earth pits and ensure that the earth resistance of all earthed structures is less than 1 ohm. (4) Earth pit shall be drilled and earthing electrode shall be placed in the pit, filled with back filling chemical compound all around the electrode as per manufacturer's datasheet/ installation instructions. (5) Earth chambers of brick masonry shall be constructed as per BHEL drawing enclosed. All items of earth chambers, including lid, shall be in vendor scope of supply. (6) Earth chambers shall be interconnected in the solar array field, using min. 25x6 mm GI strip that shall be laid underground. (7) Terminations at the electrode end shall be made using bolting method. Welding shall not be applied at electrode end. For this purpose, a separate link with multiple mounting holes shall be used at the electrode end. This way, GI strips (25x3 mm) running from structure leg and the GI strips (25x6mm) from adjacent electrodes shall be terminated at this link, which shall, in turn, be connected to the electrode. Joining of 25x6 mm GI strips at intermediate positions, wherever applicable, shall be made using either welding or bolting method. Either way, the overlapping of the two strips shall be for a minimum length of 150mm. Welding shall be for the entire overlapping length. In case of bolting, minimum three bolt joints shall be used per overlap length. For each	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 41 OF 58

	earth pit, necessary Test Point shall have to be provided. (8) All GI strips, earthing electrodes and all hardware (nuts, bolts, washers of SS304) shall be in vendor scope of supply. (9) Vendor shall provide calculations for earthing, layout drawings showing earth chamber locations during detailed engineering.	
5.33	Earthing lines for control room and inverter room panels – PCUs, Battery banks, FCBC charger, ACDB, IRDB, SCADA panels, etc. (1) 50x4 copper strips shall be laid in the cable trenches of control room. Copper strips of required length shall be in vendor scope of supply. (2) Strips shall be covered by heat-shrinkable sleeves. Sleeves and Heater gun for heat-shrinking the sleeves over copper strips shall be organized by vendor. (3) Copper strips shall be anchored to the cable trench wall using insulation bush supports that will be in the scope of vendor. (4) Expansion bolts of appropriate size (Minimum M8) shall be used to fix the insulation bush supports. (5) Vendor shall provide the earthing line layout drawing along with calculations. Minimum one No. earthing pit shall be considered for each of control room and inverter room panels such as PCUs, ACDB, battery charger etc. All the earth chambers shall be interconnected using 50X4 copper earth strip. (6) Copper strips shall be connected to the earthing terminals of all the control room and inverter room panels using min. 25 sq-mm copper, unarmoured, PVC cables that shall be supplied by the vendor. Cable lugs and hardware (bolts, nuts, washers etc shall be of SS304) required for connecting the 25 sq-mm cable to the earth terminals of panels and also to the copper strip end shall be in vendor scope of supply. (7) These chambers shall be located near the control and inverter room. Exact locations will be intimated by BHEL site engineer. (8) Connection between earth chamber and copper earthing strip shall be made using cable, 1Cx 25sq-mm, copper, unarmoured, 1100V, PVC cables as per IS:1554 (part-1) that shall be in vendor scope of supply. (9) Routing of 1Cx25 sq-mm cables to electrode earth chambers shall be using 1-inch CPVC pipes, joints, bends and elbows that shall be in vendor scope of supply. Routing shall be underground outside the inverter and control room, at a depth of ~450mm below the ground level. Required length of CPVC pipe shall be supplied. Number of CPVC joints and elbows shall be as applicable. (10) Expansion bolts, cable lugs and all hardware required for this activity shall be within vendor scope of supply.	
5.34	Earthing of switchyard equipment and fencing. Vendor shall install Ground mat for switchyard as per IS. The minimum quantity of earthing electrodes equipment wise is as below: (1) Inverter Transformers body earth – 4x 2 Nos each = 8 Nos. (2) PCVCB, CT and PT structure earth– 2 Nos. each (3) 4P/2P/6P structure body earth – 2 Nos each (4) Lightning arrestors– 2 Nos each (5) Aux transformer, body earth –2Nos. (6) Aux transformer, neutral earth –2Nos. (7) Switchyard fencing – Quantity as required Vendor shall submit earthing design calculation as per standards. GI strips of min. 50x6 mm shall be used for forming a grid for all the body earthing in order to achieve a good earth resistance value. Extra number of electrodes may be supplied and installed if the overall resistance in switchyard shall be more than 0.5 ohm. GI strips shall be laid underground at a depth of ~ 500 mm. Earth electrodes with	



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 42 OF 58

	chemicals, GI strips, all hardware required for making the connections shall be within vendor scope of supply. Vendor shall carry out all the necessary GI strip laying and interconnections to form earth mat under the ground at a depth of ~ 500 mm. Vendor shall carry out measurement of earth resistance in all the cases that shall be witnessed, verified and certified by BHEL site engineer. Suitable size MS flats shall be laid according to the excavated ground profile for a grid of 2 x 2 Mtrs or higher as required and the main and cross conductors shall be welded together at the cross junctions by using 8 SWG low hydrogen welding electrodes conforming to AWS-7106 OR 7108 class to the full thickness to form fillet welds on either side of the MS flats. The Ms flats shall be surrounded by bentonite clay proportionately with water while applying for the entire ground mat grid. The design and drawings shall be got approved prior to commencement of the works. The welded surface of the ground mat joints and cross connections of the earth mat grid shall and two coats of red oxide paint and one coat of coal tar paint shall be applied after allowing each coat to dry sufficiently. In addition, CI pipe rods shall be driven around the switchyard periphery at an interval of 6 mtrs. The rods shall be driven directly to the ground and filled with bentonite clay and connected to the ground mat. Chemical electrodes with proper treatment by using chemicals can also be used for reliable operation instead of CI pipe rods. The vendor shall carry out the study of soil resistivity after completion of erection and in case the soil resistivity is found to be high, then additional mat shall be laid and connected to the existing ground mat in the switchyard mat to bring down the resistance value below 0.5 Ohms.	
5.35	Lightning arrestors (ESE) type (1) Vendor shall supply and install Early streamer emission lightning arrestors as per standards: UNE 21186 and NF C-17 102, Make: Ingescor/ABB/equivalent as shall be approved by BHEL, with minimum protection radius of 100 m. with counters and earthing systems. (2) Quantity : As required to cover the entire area of the plant (3) Lightning arrestors shall be mounted on top of a mast of height 5m minimum above ground level using MS pipe of 100 mm minimum average diameter with painted finish; Each mast shall be secured by three steel stay wires that are suitably grouted. Masts shall have appropriate steel base plate for mounting on an RCC concrete foundation pedestal of 450x450 mm size, 1m depth below ground level, 300mm minimum above ground level, PCC 1:4:8 as the bottom layer (~100 mm thick), steel rods of diameter 8mm minimum, concrete M25 with four J bolts (M16) of 750mm long, with nuts and washers. (4) Minimum two earthing chambers per lightning arrestor set using chemical earthing electrodes shall be constructed as per manufacturer's recommendations. (5) All mechanical and electrical connections, cables, junction boxes, hardware etc shall be within vendor scope. (6) Vendor shall submit general arrangement and detailed drawings with bill of materials / quantities of the overall lightning arrestor arrangement including foundation pedestal details to BHEL for approval.	
5.36	Yard lights for switchyard, approach roads, pathways and compound wall (periphery lighting): (1) Vendor shall supply and install required number of lights in switchyards,	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 43 OF 58

	approach road, pathways and pre-cast type compound wall to maintain minimum LUX requirement of 20 LUX. (2) Light fitting, Bajaj/Havells/Equivalent make LED type shall be supplied and fitted on the GI bend pipes/poles/angles available in compound wall using necessary hardware. (3) Adequate spacing between the poles shall be provided to ensure the minimum lux requirement. (4) Underground armoured, PVC insulated, copper/ Aluminum cables of suitable size and required length shall be laid for power supply. Supply of these cables is in the scope of the vendor. Vendor shall submit cable sizing calculation for approval. (5) Junction box shall be at a height of 1m above ground level. MCB of suitable rating along with junction box shall be provided for each pole. (6) The Junction box shall be made of stainless steel (IP65), Dust & vermin Proof and shall have suitable brass or copper made connector terminal., MCB (1A, single pole) of Schneider or reputed make, 3 glands for incoming and outgoing cables. (7) The junction box, cable lugs, steel bracket for mounting the box on the lighting pole and all hardware items shall be in vendor scope. (8) Provision for timer based ON/OFF control shall be made for yard lighting in ACDB. (9) Glands shall be located at the bottom side of Junction box. (10) Necessary underground cabling work is in the scope of the vendor. (11) Vendor shall submit the lighting layout, lighting illumination calculations, cable trench layout, shadow calculation, foundation pedestal details, detailed BOM for BHEL approval. (12) Vendor shall ensure that equal loading is distributed in all the three phases. (13) Supply of necessary hardware such as nuts, bolts, washers (SS304) is in the scope of vendor. (14) Vendor to ensure the lighting arrangement does not cast shadows on the PV modules. (15) All necessary tools and tackles shall be in the scope of vendor.	
5.37	Cable trench formation and laying of cables for yard lights Vendor shall construct the underground trench of required length for laying the cables for yard lights (1) Trench depth = 600 mm minimum (2) Trench width = 200 mm minimum (3) Sand as per IS: 383 of 100 mm layer thickness shall be laid at the bottom most level of trench. (4) Over the sand layer, cables shall be laid one adjacent to the other. Cables shall not be laid one over the other. In other words, only one layer of cables shall be allowed. (5) Over the layer of cables, one more layer of sand of 100mm shall be laid. (6) Then, a single layer of class-2 brick of 75 mm thickness shall be laid. (7) Trench shall then be filled up with refill soil.	
5.38	Cable terminations and supply of cables and CPVC pipes for yard lights (1) Cable termination: (a) Termination of cables, including unsleeving, crimping, connecting to the junction box and lamp shall be within scope of vendor. (b) Similarly, cables shall be terminated at the ACDB panel within the control room. (2) Vendor shall supply following cables of required length: (a) 2-core/4-core, Cu/Al, armoured, PVC cable (size of cable shall be finalized	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 44 OF 58

	based on cable sizing calculation to be submitted by vendor) (b) 2Cx 1.5 sq-mm Cu/Al, unarmoured, PVC cable from JB to light fitting (3) Vendor shall supply following 1-inch CPVC pipes of required length:	
5.39	Construction of bore wells for water supply for O&M including water analysis, electrical cabling and plumbing works. (1) Vendor shall construct a minimum of two bore wells and pump the water from bore wells to water storage tanks to be located on the control room and inverter room buildings. (2) Water analysis shall be carried out and reports shall be submitted to BHEL. (3) Pressure pump of required capacity (3 phase) with all necessary electrical cabling up to the ACDB's located in control room/ nearest IR shall be provided. Vendor shall submit the calculations for deciding pump rating and cable size. (4) Casing as required shall be provided for the pump. (5) Pump and the electrical cables shall be in vendor scope of supply. Cable (Armoured, PVC) of suitable size depending on pump rating and of required length shall be laid underground at a depth of ~600 mm, with sand layers below and above the cable (100 mm each). A brick layer, class-2, 75mm thick shall be laid over the sand layer. Trench shall, then, be closed with refill soil and neatly compacted. (6) Pump make: CGL, Suguna, Kirloskar , or other make for which BHEL approval shall be taken. (7) Vendor shall supply and install of PVC water storage tanks of 5000 liters capacity each on control room (2 Nos.) and inverter room (2 Nos.).	
5.40	SPV module cleaning system (1) Vendor shall lay 2-inch CPVC pipelines from overhead tanks to the solar array field with all necessary CPVC nipples, T-joints, reducers, bends, couplers etc. This forms the main header pipeline. Suitable valves such as brass valves of 2-inch etc shall be provided for this main header line. For the branching out lines that spread into various rows of the solar array to provide water delivery points for module cleaning, 1-inch CPVC pipelines shall be used. Supply of CPVC pipe shall be in vendor's scope. (2) Two numbers of suitable centrifugal 3-phase booster pumps of required capacity shall be supplied and installed one each at control room and inverter room to draw the water from storage tanks to solar array field for solar PV module cleaning. Vendor shall furnish design/pressure calculations for selection of pump size. One spare pump shall also be supplied. (3) Starter and DP switch (2 set-1 set for each pump) shall be supplied and installed in control room and inverter room for operating the pump. (4) Supply of electrical cables (with lugs, hardware) and wiring the pump up to the ACDB panel / starter in the control room and inverter room shall be in vendor scope. Cable of required dimension, Cu, armoured, PVC cable shall be supplied and used. (5) CPVC pipelines shall be laid underground (at a depth of ~500 mm below ground level). (6) There shall be adequate nos of delivery points for module cleaning. At these delivery points, 1-inch riser lines shall be provided to tap the water from underground line to the delivery point ~300 mm above ground level. Ball valve forged steel type, 1-inch, with suitable nipple for connecting the hose pipe, shall be provided at each delivery point. (7) After installation and testing of water lines, excavated trenches shall be closed with refill soil. Further, the soil, all along the water lines, shall be suitably leveled and compacted.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 45 OF 58

	(8) Hosepipes (ribbed, flexible) of 50m long shall be provided for connecting the hose to the nearest ball valve/nipple. The other end shall be provided with nozzle/appropriate gun to direct the pressurized water on the module for cleaning. 6 such sets shall be provided. (9) Vendor shall ensure adequate pressure of water is available for module cleaning. (10) Vendor shall submit detailed scheme with BOM etc. for module cleaning system from storage tank to solar array field.	
5.41	Identification markings using paint and cable tags, as applicable to the individual cases and as approved by BHEL, shall be provided: (1) String monitoring junction boxes: Identification marking by way of painting on nearby module structure. (2) All switchyard equipment such as transformers, VCB panels, C&R panels, CT, PT, GOS and metering panels shall be provided with suitable identification markings using painting, with inscriptions as approved by BHEL. (3) Cable sizes with arrow marks in switchyard (for HT cables) using painting. (4) Identification markings for all the earth chambers (using painting) with inscriptions as approved by BHEL. (5) Cable tags using aluminium plate of 1-2 mm thickness with suitable inscriptions as approved by BHEL for all the power cables of the electrical panels such as PCUs, LT panels, Batteries, FCBC chargers, ACDB panel etc.	
5.42	Cable markers (1) Steel cable markers with suitable labels (DC cable, LT cable, HT cable, Data cable, CPVC water pipeline etc) and arrow marks (pointing to the cable destination) shall be supplied and installed along the cable trenches at appropriate locations for following cases: - For 300 sq-mm cable from string monitoring boxes to respective inverter rooms - For data communication cables from string monitoring boxes to control room - For cables of yard lights of solar array field, compound wall/chain-link fencing and switchyard fencing - For electrical cables of bore well connections - For HT (33KV) cables within switchyard - For aux transformer to ACDB panel - For CPVC water pipelines (2) Cable markers shall be suitably grouted with concrete foundation depth of minimum 300 mm below the ground level. Cross section of foundation shall be minimum 200mm diameter. (3) Cable markers shall have a minimum height of 300 mm above the ground level. (4) Cable markers shall be suitably painted.	
5.43	Hoarding board for the solar power plant. (1) 1 No. hoarding for the plant shall be made of 1500x1800x 3mm thick MS plate. Approximate dimension of board 1500x1800 mm. (2) Board shall be given a red oxide coat and painted with black colour for background. Letters shall be written with white colour. (3) Board shall be fixed on a frame constructed using ISA 50x50x8 angles. Diagonal supports shall also be provided. The frame shall be supported by two vertical legs of ISA 75x75x8 that is grouted with concrete foundation. (4) Depth of foundation shall be 600 mm below ground level, with 100mm thick PCC layer 1:4:8 of 400x400mm, M25 concrete of 300x300mm, foundation pedestal of 200mm height above ground level. (5) Bottom level of board shall be at a height of 1.5m above the ground level.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 46 OF 58

	(6) Vendor shall submit the drawing of hoarding arrangement to BHEL for approval.																												
5.44	Display boards and sign boards <table border="1"> <tr> <td>1</td><td>Board displaying instruction chart for restoration of person from Electric Shock</td><td>2 Nos</td></tr> <tr> <td>2</td><td>Board displaying instruction chart for artificial respiration</td><td>2 Nos</td></tr> <tr> <td>3</td><td>Board displaying dos and don'ts.</td><td>2 Nos</td></tr> <tr> <td>4</td><td>Board displaying fire extinguishers details and operations</td><td>2 Nos</td></tr> <tr> <td>5</td><td>"No smoking" board</td><td>10 Nos</td></tr> <tr> <td>6</td><td>Board showing list of O&M staff with name, qualification and work responsibility</td><td>1 Nos</td></tr> <tr> <td>7</td><td>Board showing list of contact details of BHEL, O&M team, O&M security, police station, fire service, hospital, medical store etc with names, address, mobile numbers etc</td><td>1 Nos</td></tr> <tr> <td>8</td><td>Danger boards with details such as value of voltage etc for string monitoring boxes, PCUs, LT panels, Transformers, HT panels, Four pole / two pole structures in switchyard etc.</td><td>Qty as required</td></tr> <tr> <td>9</td><td>Identification boards, of suitable sizes, within control room such as scada room, store room, battery room, security room, gents / ladies toilets, pantry etc shall be supplied by vendor. BHEL will provide the list.</td><td>Qty as required</td></tr> </table> (a) 5mm thick sun board with LG make vinyl sticker (computerized cutting and pasting) shall be used for SI Nos 4, 5, 8 and 9. (b) For others, flex banner with design & printing shall be used. Required number of danger notice plates shall be provided wherever necessary. Suitable size of each Danger Notice plates shall be provided as per statutory requirement, made of mild steel sheet and at least 2mm thick, and vitreous enameled white on both sides, and with inscription in signal red colours on front side as required. The inscriptions shall be in Kannada and English language.	1	Board displaying instruction chart for restoration of person from Electric Shock	2 Nos	2	Board displaying instruction chart for artificial respiration	2 Nos	3	Board displaying dos and don'ts.	2 Nos	4	Board displaying fire extinguishers details and operations	2 Nos	5	"No smoking" board	10 Nos	6	Board showing list of O&M staff with name, qualification and work responsibility	1 Nos	7	Board showing list of contact details of BHEL, O&M team, O&M security, police station, fire service, hospital, medical store etc with names, address, mobile numbers etc	1 Nos	8	Danger boards with details such as value of voltage etc for string monitoring boxes, PCUs, LT panels, Transformers, HT panels, Four pole / two pole structures in switchyard etc.	Qty as required	9	Identification boards, of suitable sizes, within control room such as scada room, store room, battery room, security room, gents / ladies toilets, pantry etc shall be supplied by vendor. BHEL will provide the list.	Qty as required	
1	Board displaying instruction chart for restoration of person from Electric Shock	2 Nos																											
2	Board displaying instruction chart for artificial respiration	2 Nos																											
3	Board displaying dos and don'ts.	2 Nos																											
4	Board displaying fire extinguishers details and operations	2 Nos																											
5	"No smoking" board	10 Nos																											
6	Board showing list of O&M staff with name, qualification and work responsibility	1 Nos																											
7	Board showing list of contact details of BHEL, O&M team, O&M security, police station, fire service, hospital, medical store etc with names, address, mobile numbers etc	1 Nos																											
8	Danger boards with details such as value of voltage etc for string monitoring boxes, PCUs, LT panels, Transformers, HT panels, Four pole / two pole structures in switchyard etc.	Qty as required																											
9	Identification boards, of suitable sizes, within control room such as scada room, store room, battery room, security room, gents / ladies toilets, pantry etc shall be supplied by vendor. BHEL will provide the list.	Qty as required																											
5.45	Electrical insulation mat (1) Vendor shall supply required number of electrical insulating mats as follows: (a) Make: Vardhman House Private Ltd or reputed equivalent as shall be approved by BHEL. (b) As per IS: 15652:2006 (c) Class B (d) Thickness 2.5 mm minimum (e) Size = 2m x 1m minimum (f) Colour: Black. (g) Max use voltage = 1.1 KV/ 33KV depending on location (h) Marking of IS standard on the mat (2) Test certificate shall be provided by vendor (3) Vendor shall lay the mats in front of electrical panels (PCUs, LT, HT, FCBC, ACDB panels) in control and inverter rooms, switchyard.																												
5.46	Checkered plate for closing the cable trenches (a) behind the panels such as PCUs, LT panels, VCB panels, ACDB panels etc in inverter and control room and also (b) other open areas of cable trench (1) Vendor shall supply and install Checkered plate. Plate shall have a suitable handle (welded to the plate) to facilitate ease of lifting and movements. (2) Plate thickness = 6mm min. (3) Width = 1000 mm max, total length as required																												



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 47 OF 58

	(4) These width and length dimensions are indicative. Actual dimensions shall be based on site conditions. (5) Plate shall be red oxide coated followed by black painting. (6) BHEL approval shall be obtained for overall arrangement of checkered plate.																																																																																		
5.47	Air conditioner and pedestal fans Vendor shall supply and install 2 Nos. Split air conditioners of 1.5T capacity (min BEE 3 star rating) each with stabilizers in SCADA room. Make: LG, Videocon, Bluestar or reputed equivalent that shall be approved by BHEL. Construction of SCADA room and partitioning is in the scope of BHEL. Pedestal fans: 2 nos pedestal fan shall also be provided for SCADA room. Make shall be approved by BHEL.																																																																																		
5.48	Tool kits and instruments Vendor shall supply the following tool kits and instruments: A. Measuring instruments <table border="1"><tr><td>1</td><td>Digital Earth Resistance Tester</td><td>Cambridge Instruments/equivalent</td><td>DET-2000</td><td>1 Nos</td></tr><tr><td>2</td><td>Digital multimeter</td><td>Reputed make</td><td></td><td>2 Nos</td></tr><tr><td>3</td><td>AC-DC Clamp Meter</td><td>Lutron/equivalent</td><td>DM-6506</td><td>2 Nos</td></tr><tr><td>5</td><td>Digital thermometer (wall hanging)</td><td>Reputed Make</td><td></td><td>2 Nos</td></tr><tr><td>6</td><td>Megger – 5KV</td><td>Shanti Electric Instruments, Nippen/equivalent</td><td></td><td>1 Nos</td></tr><tr><td>7</td><td>Electrical Tester</td><td>Reputed Make</td><td></td><td>4 Nos</td></tr></table> Note: Make / model number etc shall be approved by BHEL prior to procurement. B. Tool kits <table border="1"><tr><td>1</td><td>Double ended spanner Set of sizes 10-11, 12-13, 14-15, 16-17, 17-18</td><td>4 Nos each</td></tr><tr><td>2</td><td>Screwdriver Set</td><td>2 Set</td></tr><tr><td>3</td><td>Crimping tool with Dye range 50-400sq-mm cable, mechanical gear power, hand operated</td><td>1 Set</td></tr><tr><td>4</td><td>Crimping tool up to 6 sq-mm cable</td><td>2 set</td></tr><tr><td>5</td><td>Drilling machine AC, hand operated, with bit size up to 20 mm</td><td>1 set</td></tr><tr><td>6</td><td>Measuring Tape, 5m</td><td>4 Nos</td></tr><tr><td>7</td><td>Measuring Tape, 50 m</td><td>2 Nos</td></tr><tr><td>8</td><td>Allen Key set</td><td>2 Set</td></tr><tr><td>9</td><td>Adjustable spanner 2-inch size</td><td>2 No</td></tr><tr><td>10</td><td>Hammer</td><td>4 Nos</td></tr><tr><td>11</td><td>Rough file kit</td><td>2 Set</td></tr><tr><td>12</td><td>Platform balance, 50Kg range, 100g accuracy</td><td>1 No</td></tr><tr><td>13</td><td>Cutting Pliers</td><td>4 Nos</td></tr><tr><td>14</td><td>Nose Pliers</td><td>4 Nos</td></tr><tr><td>15</td><td>Vacuum cleaner, of industrial type, for control room sweeping / cleaning.</td><td>1 No.</td></tr><tr><td>16</td><td>Blowers for cleaning the panels</td><td>1 No.</td></tr></table> Note: Prior to procurement, vendor shall obtain approval from BHEL for the make and specification of the items.				1	Digital Earth Resistance Tester	Cambridge Instruments/equivalent	DET-2000	1 Nos	2	Digital multimeter	Reputed make		2 Nos	3	AC-DC Clamp Meter	Lutron/equivalent	DM-6506	2 Nos	5	Digital thermometer (wall hanging)	Reputed Make		2 Nos	6	Megger – 5KV	Shanti Electric Instruments, Nippen/equivalent		1 Nos	7	Electrical Tester	Reputed Make		4 Nos	1	Double ended spanner Set of sizes 10-11, 12-13, 14-15, 16-17, 17-18	4 Nos each	2	Screwdriver Set	2 Set	3	Crimping tool with Dye range 50-400sq-mm cable, mechanical gear power, hand operated	1 Set	4	Crimping tool up to 6 sq-mm cable	2 set	5	Drilling machine AC, hand operated, with bit size up to 20 mm	1 set	6	Measuring Tape, 5m	4 Nos	7	Measuring Tape, 50 m	2 Nos	8	Allen Key set	2 Set	9	Adjustable spanner 2-inch size	2 No	10	Hammer	4 Nos	11	Rough file kit	2 Set	12	Platform balance, 50Kg range, 100g accuracy	1 No	13	Cutting Pliers	4 Nos	14	Nose Pliers	4 Nos	15	Vacuum cleaner, of industrial type, for control room sweeping / cleaning.	1 No.	16	Blowers for cleaning the panels	1 No.	
1	Digital Earth Resistance Tester	Cambridge Instruments/equivalent	DET-2000	1 Nos																																																																															
2	Digital multimeter	Reputed make		2 Nos																																																																															
3	AC-DC Clamp Meter	Lutron/equivalent	DM-6506	2 Nos																																																																															
5	Digital thermometer (wall hanging)	Reputed Make		2 Nos																																																																															
6	Megger – 5KV	Shanti Electric Instruments, Nippen/equivalent		1 Nos																																																																															
7	Electrical Tester	Reputed Make		4 Nos																																																																															
1	Double ended spanner Set of sizes 10-11, 12-13, 14-15, 16-17, 17-18	4 Nos each																																																																																	
2	Screwdriver Set	2 Set																																																																																	
3	Crimping tool with Dye range 50-400sq-mm cable, mechanical gear power, hand operated	1 Set																																																																																	
4	Crimping tool up to 6 sq-mm cable	2 set																																																																																	
5	Drilling machine AC, hand operated, with bit size up to 20 mm	1 set																																																																																	
6	Measuring Tape, 5m	4 Nos																																																																																	
7	Measuring Tape, 50 m	2 Nos																																																																																	
8	Allen Key set	2 Set																																																																																	
9	Adjustable spanner 2-inch size	2 No																																																																																	
10	Hammer	4 Nos																																																																																	
11	Rough file kit	2 Set																																																																																	
12	Platform balance, 50Kg range, 100g accuracy	1 No																																																																																	
13	Cutting Pliers	4 Nos																																																																																	
14	Nose Pliers	4 Nos																																																																																	
15	Vacuum cleaner, of industrial type, for control room sweeping / cleaning.	1 No.																																																																																	
16	Blowers for cleaning the panels	1 No.																																																																																	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 48 OF 58

5.49	Office furniture Vendor shall supply and install the following: <table border="1" data-bbox="247 392 1260 660"> <tr> <td>1</td><td>Executive table, wooden type, complete with draws and side racks</td><td>1 sets</td></tr> <tr> <td>2</td><td>Chairs, swivel type, with arm rest</td><td>8 Nos</td></tr> <tr> <td>4</td><td>PC table with chair</td><td>2 sets</td></tr> <tr> <td>5</td><td>Storage almirahs</td><td>1 Nos</td></tr> <tr> <td>6</td><td>Filing cabinets</td><td>1 Nos</td></tr> <tr> <td>7</td><td>Aqua Guard or approved make water purifiers</td><td>1 Nos.</td></tr> </table> Make: Godrej or reputed equivalent as shall be approved by BHEL. BHEL approval shall be obtained, for the type of office furniture, for which catalog with model numbers, sizes / dimensions etc shall be submitted to BHEL.	1	Executive table, wooden type, complete with draws and side racks	1 sets	2	Chairs, swivel type, with arm rest	8 Nos	4	PC table with chair	2 sets	5	Storage almirahs	1 Nos	6	Filing cabinets	1 Nos	7	Aqua Guard or approved make water purifiers	1 Nos.	
1	Executive table, wooden type, complete with draws and side racks	1 sets																		
2	Chairs, swivel type, with arm rest	8 Nos																		
4	PC table with chair	2 sets																		
5	Storage almirahs	1 Nos																		
6	Filing cabinets	1 Nos																		
7	Aqua Guard or approved make water purifiers	1 Nos.																		
5.50	Fire alarm system for control room and inverter room: (1) Fire alarm system with smoke detectors, hooters, manual call points, an electronic control panels and interconnection wiring shall be supplied and installed. Make: Zicom/ Notifier /Ravel or any other reputed equivalent as shall be approved by BHEL. (2) Control panels in sheet steel enclosure, power coated finish, shall be a microprocessor based system with central processing unit, input / output modules, power supply with battery and battery charger, control electronics and display mechanisms. The panel shall be a 4 zone system with audio-visual provisions (LED indications and beeps) for zone-wise annunciation. Individual detector-wise traceability / addressability is not required. It shall have provisions for acknowledgement of alarm and manual resetting. Batteries used shall be lead acid maintenance free type provided with connecting leads. (3) Smoke detectors shall be of conventional / optical / photoelectric type. It shall not be of ionization type that employs radioactive materials. (4) Electrical hooters shall sound the alarm upon detection of smoke by the detectors. (5) Manual call point shall be with high-gloss finish, alarm LED provision, breakable glass unit, hammer and chain. (6) All the system components shall be installed and commissioned using suitable wiring using copper cable, min. 2C x 1.5 sq-mm, armoured, fire retardant low smoke PVC with casing / tubing of type and size, of required length, as approved by BHEL. (7) Spares: Smoke detectors – 2 No, Manual call point – 2 No, Hooter – 1 No. (8) Sufficient quantity of sensors, alarms, hooter, manual call points etc. shall be supplied and installed as per the necessary statutory requirements. Vendor should ensure the design of fire protection system in line with the regulations of the Fire Safety department of the state. (9) Vendor shall submit fire alarm layout/scheme along with the detailed BOM to BHEL for approval. (10) Fire alarm control panels shall have provision for RS-485 Modbus output so that status can be monitored in plant SCADA system.																			
5.51	Other safety related items (1) Safety gadgets: <table border="1" data-bbox="303 2004 1308 2060"> <tr> <td>1</td><td>Gas Mask</td><td>4 Nos</td></tr> <tr> <td>2</td><td>First Aid Box with essential medicines and bandage cotton,</td><td>4 set</td></tr> </table>	1	Gas Mask	4 Nos	2	First Aid Box with essential medicines and bandage cotton,	4 set													
1	Gas Mask	4 Nos																		
2	First Aid Box with essential medicines and bandage cotton,	4 set																		



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 49 OF 58

		antibiotic cream, Dettol, etc.		
	3	Hand Gloves 33 KV for GOS operation	4 sets	
	4	Hand Gloves 1KV for Maintenance of SMB	4 sets	
	5	Discharge rod	4 Nos	
	6	Safety Helmet	10 Nos	
	7	Rain Coat	4 Nos	
	(2) Fire extinguishers and sand buckets, as per the regulations of the Fire safety department of the state, shall be supplied and commissioned at the power plant. BHEL approval shall be obtained for locations at which they shall be kept. Quantities mentioned below are minimum. Vendor to comply the requirements of statutory bodies.			
	1	Dry powder fire extinguisher (stored pressure type)	Capacity: 10 Kg IS: 2171, IS:10658 CM/L-7759096 Suitability for Class A, B & C fire, related to solid combustibles, flammable liquid and gases.	10 Nos
	2	Carbon di-oxide (CO2) type fire extinguisher with trolley	Capacity: 9 Kg IS: 2878 Suitability for Class B&C fires Involving flammable liquids & gases, electronic equipment.	10 Nos
	2	Sand buckets	GI fire buckets (as per IS: 2546) with suitable steel stand and cover arrangement. All items shall be painted with red oxide and BHEL approved red paint. BHEL approval shall be obtained for the overall arrangement. Each set of stand shall carry four sand buckets. A suitable cover shall be designed and provided to protect the buckets from rain.	8 sets
5.52	Pre-commissioning inspections / checks / tests and coordination with state departments for necessary approvals and clearances for commissioning, synchronization with grid and post-commissioning operation of the plant: (A) Vendor shall carry out following minimum pre-commissioning checks: (1) Verification of firmness of terminations in all electrical equipment: SMBs, PCUs, LT/VCB panels, transformers, 4P/2P/6P structure items (GOS, LAs etc), SCADA stations, weather monitoring equipment and PV array earthing. (2) Verification of earthing for all these electrical equipment. (3) Measurement and verification of parameters at string monitoring boxes at solar array field: string current, voltage, combined SMB output current, module temperature, SMB temperature. (4) Measurement and verification of parameters on DC input side of PCUs: DC current and voltage; Vendor shall support the PCU engineer on these tests. (5) Insulation resistance measurements (megger tests) for all the electrical equipment of control room, inverter room and switchyard. (6) Functional checks for PCUs: Vendor shall support the PCU engineer during the pre-commissioning tests.			

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 50 OF 58

	(7) Functional checks for transformer marshalling box: Availability of AC/DC power supply, (b) Responses of the relays at VCB panels, C&R panels and corresponding indications at annunciation panel by simulating the alarm / trip of Buchholz, PRV, WTI, OTI, LOLA at marshalling box. (8) Functional checks for VCB panels and C&R panels: (a) Availability of AC/DC power supplies (b) VCB on/ off, (c) spring charging, (d) LED indications, (e) functioning of electromagnetic and numerical relays, (f) responses at VCB/C&R panels to operations from C&R panels/SCADA (g) indications on windows, alarm accept/reset operations /SCADA. (b) Verification of interlock operations related to incomer and outgoer VCBs. (9) Verification of parameters at SCADA station: (a) DC/AC parameters from SMBs, HT panels, ACDB panels, Metering panels, (b) status of ACB/VCB breakers and transformer protection relays, (c) weather monitoring parameters. (10) Functional checks on SCADA software: mimic diagrams, trend graphs, remote accessibility etc. (11) Earth resistance measurements at the electrode chambers for solar array, control room panels and switch yard equipment. (B) Pre-commissioning tests on transformers, CTs, PTs, Lightning arrestors, GOS switches, vacuum circuit breaker, relays, etc: (1) Usually performed tests are indicated as below. However, exact type of tests required to be conducted at site prior to commissioning shall be in line with STATE ELECTRICITY SUPPLY & TRANSMISSION BOARDS/CEIG/SECI etc., requirements. (a) Transformers: IR tests, ratio tests, excitation current measurement, magnetic balance test on HV, short circuit test, excitation test LV side, vector group test. (b) 33KV vacuum circuit breaker panels and C&R panels: IR tests and continuity tests for panels, IR values for CTs/PTs, excitation test on CTs, primary injection tests for CTs, ratio test for PTs (c) Auxiliary transformers: IR tests, ratio tests. (d) Relays in C&R panels: open/close, tripping, primary injection tests. (e) Lightning arrestors: IR tests (f) GOS switches: IR and contact resistance tests. (2) Appropriate testing agency shall be arranged for the tests. (3) Vendor shall coordinate / liaison with concerned STATE ELECTRICITY SUPPLY & TRANSMISSION BOARDS/MRT departments to fix up test schedules and witness by their representatives. (4) Vendor shall prepare and submit the reports to STATE ELECTRICITY SUPPLY & TRANSMISSION BOARDS/MRT/CEIG/SECI and obtain their approval through necessary liaison activities. (C) Vendor shall coordinate and liaison with STATE ELECTRICITY SUPPLY & TRANSMISSION BOARDS/CEIG etc., prepare and submit the applications with necessary enclosures on behalf of BHEL and obtain their approval: (a) Approval for BHEL drawings (b) Approval for synchronization of plant with grid. (c) CEIG inspection of power plant (d) Provisional CEIG clearance to proceed with commissioning	
--	--	--

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 51 OF 58

(D) Vendor shall take approval of BHEL for appointing Electrical consultant for the entire SPV plant and switch yard to comply with CEIG norms and getting approvals. (E) Vendor shall implement corrective steps on the observations of CEIG, follow-up with them and obtain final clearance for licensed operation of the plant on a continuous basis. Note: Scope of coordinating with state departments such as STATE ELECTRICITY SUPPLY & TRANSMISSION BOARDS, CEIG to get the clearances / approvals for licensed / statutory operation of the power plant on a continuous basis includes all transactions required for successful liaison and clearances. Application fees and renewal fees (say, in the form of DD) to be enclosed with application / renewal documents and all other expenses in the above process shall be in the scope of vendor.	
---	--

6.0 Tests at manufacturer / sub-vendor works and witnessing by BHEL

6.1 BHEL shall witness routine / acceptance tests performed at manufacturer works for following items. Vendor shall accordingly provide inspection call to BHEL, with submission of quality assurance plan to BHEL in advance. 1) HDPE DWC pipe 2) Pre-stressed concrete (PSC) / RSJ poles for 2P/4P/6P structure 3) Gang operated switch 33KV with/ without earth switch 4) Lightning arrestors 30kV, 10kA 5) Auxiliary transformer 100kVA, 33KV / 433V, ONAN 6) Disc insulators and other 2P/4P/6P structure accessories 7) ACSR conductor 8) All cables under vendor scope (LT, data, control, OFC and communication cables) 9) Earthing electrodes & earth strip 10) Lightning arrestor (ESE) 11) Submersible pump 12) Centrifugal Booster pump 13) Ball valves 14) CPVC pipes 15) Air conditioner 16) Fire alarm system 17) Fire extinguishers 18) Electrical insulation mat 19) 33kV termination kits (indoor, outdoor) 20) ACDB, IRDB, Security room DB 21) FCBC, Battery bank Note: In case the item is bought out from dealers, test certificates, as per relevant IS / IEC standards, as issued by manufacturer shall be submitted to BHEL. However, prior approval shall be obtained from BHEL for procurement of the item from dealers.	
---	--

7.0 General conditions applicable during installation and commissioning phase

7.1	As already mentioned in previous clauses, vendor shall organize power supply on their own. Accordingly, DG sets of suitable capacity shall be deployed by the vendor for construction works.	
7.2	Water required for construction works shall be organized by vendor. Bore wells, which are deliverables of vendor as part of this contract, shall be laid in the beginning stages so that bore well water can be used for the construction purposes. Alternatively, vendor shall make their own alternate arrangements (tankers etc).	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 52 OF 58

7.3	All machinery such as cranes, hydra, JCBs, forklifts, transport trucks, trolleys etc necessary for movement of materials shall be organized by the vendor.	
7.4	All necessary tools and tackles such as crimping tool (including heavy duty tools for crimping copper cables up to 300 sq-mm), screw driver set, power screwdrivers, cutting pliers, nose pliers, spanner sets, adjustable spanners, hole saw cutter set, bending tools, torque wrenches, hack saw blades, pipe wrenches, flat / round files, HV termination tools, drilling machines, welding machines, concrete mixers, steel bar bending tools / templates for RCC works, spade, shovel, hammer etc shall be organized by the vendor.	
7.5	All necessary measuring instruments such as digital multimeters, electrical testers, meggers (1kV, 2.5kV, 5kV), lamp load testers for solar array string measurements, earth resistance meters, weighing machines, water level indicators etc shall be organized by the vendor.	
7.6	Vendor shall make their own arrangements for necessary food, drinking water and accommodation for their labour and employees posted at the site. Similarly, food and drinking water required at the site, during the construction operations, shall also be in scope of vendor.	
7.7	Vendor shall organize all necessary steps to meet statutory requirements such as labour license, PF, ESI etc and also ensure compliance with relevant acts such as minimum wages act, income tax act, employee insurance act, BOCW act etc for their labour deployed at site.	
7.8	Vendor shall maintain updated labour register, with name, age, qualification, salary, attendance details etc at the site. Vendor has to satisfy all the statutory requirements as per the labour law regulations in the state.	
7.9	Vendor shall use danger boards, wherever required, to ensure safety of the persons during the work at site.	
7.10	Vendor shall adhere to all necessary safety norms such as use of helmet, goggles, hand gloves, gumboots, aprons etc. It is the ultimate responsibility of the vendor in all respect to prevent accidents at the site and safeguard their labour from accidents.	
7.11	Vendor shall, at the completion of every work, clear off the debris, which resulted out of the work. In case of excavation work such as cable trench etc, vendor shall finish the land neatly with necessary leveling, rolling etc.	
7.12	Vendor shall carry out the work without causing inconvenience to other contract groups at the site. In case of conflicts with other groups, vendor shall ensure that the matter is resolved at once amicably so that the progress of work is not affected.	
7.13	Any damages on the building, structures etc attributable to the acts of labour / employees of vendor shall be rectified and made good by the vendor at their own cost.	
7.14	No child labour shall be employed for execution of the present contract.	
7.15	Any miscellaneous materials, which are found essential for technical completion of the contract as per regulations/standards but not mentioned explicitly in this specification, shall be deemed to be included in the specification. Accordingly, such materials shall be included by the vendor as part of the offer.	
7.16	In certain cases, approximate quantities are only mentioned. This is for the purpose of providing guidance to vendors and are as per BHEL estimation. Such quantities shall, therefore, be considered only indicative. Vendor shall, however, take into account the exact quantities that shall be required to meet the functional requirements of I&C activities as per clause 5.0.	
7.17	Special instruction for earthing: In compliance with Rule 33 and 61 of Indian Electricity Rules, 1956 (as amended up to date), all non-current carrying metal parts shall be earthed with two separate and	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 53 OF 58

	distinct earth continuity conductors to an efficient earth electrode. Accordingly, all cases such as cable support structures, cable ladders, cable trays (control room) etc shall be earthed.	
7.18	Any deviations shall be discussed with BHEL site engineers and implementation shall be taken up only after approval from BHEL.	
7.19	Vendor shall submit periodic status report, on daily as well as weekly consolidated basis, to BHEL on the progress of the contract.	
7.20	Vendor has to design all the foundations required as per this specification based on the soil report and site conditions and to be submitted to BHEL for approval before construction. However, minimum requirements are specified in this specification for ready reference. Soil report will be made available to vendor after placement of PO upon request.	
7.21	Supply and installation of all auxiliary supply cables from ACDB to various plant equipment viz., FCBC, PCU ducting exhaust fans etc., shall be in the scope of the vendor which will be intimated from time to time.	
7.22	All cable terminations shall be done in such a way that bending radius of the cable is strictly as per IS: 1255	
7.23	In case project is not completed as per BHEL scope due to reasons arising out of materials from BHEL end/vendor's end, contractor has to complete the job at later stage without any extra charges. No overrun charges shall be paid in case of extension of project schedules	
7.24	Vendor has to pay the plant electricity consumption charges, internet & telephone charges etc during the O&M period.	
7.25	Vendor shall prepare and submit as-built drawings after execution of works.	

8.0 Operations and Maintenance

8.1	Date of commencement of operations and maintenance : Zero date for O&M shall be the actual date on which the complete 10 MW capacity is commissioned with synchronization / export of power to 33kV grid and completion of all the works in the scope of the vendor.	
8.2	Period for O&M: Vendor shall operate and maintain the power plant for a period of FIVE years (60 months) from the zero date as above.	
8.3	O&M personnel 1. Vendor shall deploy following minimum personnel: (a) Technical / administrative / office personnel (i) One technical-cum-administrative in-charge having diploma in electrical / electronics engineering and experience in electrical plants with overall responsibility for complete plant operations. The in-charge shall have competence to handle technical and operational / crisis problems. (ii) Three working level staff with ITI / diploma level qualifications in engineering with competence for operating electrical / electronics / mechanical equipment, taking measurements, data logging / maintaining registers, preparation of reports in computer. (iii) Six unskilled persons for regular house-keeping (cleaning / mopping etc) and water cleaning of SPV modules. (iv) Note: At least one among the technical personnel shall essentially be a certified / licensed person for HT operations (33KV minimum). This is a mandatory requirement. (b) Security personnel	



**PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS
SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER
PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK,
HAVERI DIST., KARNATAKA**

PS-439-1097

Rev No: 00

PAGE : 54 OF 58

	(i) Minimum Five security guards with competence to handle tough situations and safeguard the plant from miscreants. Among these, three shall be deployed during night time and two during day time. Three security persons during night are considered for patrolling and stationed security. Wireless communication (walkie-talkie etc) shall be provided for the security personnel. (c) In case, any of the above O&M personnel is on leave, reliever shall be arranged by the vendor so that there is no effect on O&M activity. 2. Similarly, O&M personnel shall be provided with raincoats, toolsets, earthing rods, safety gloves, safety goggles, gumboots, helmets and all other personal protective equipment (PPE) that will be relevant to ensure human safety. 3. Names, qualification, work responsibility of personnel shall be listed on a display board within control room. 4. Attendance register shall be maintained for both the teams. 5. Vendor shall ensure statutory requirements such as ESI, PF and labour license for their O&M personnel posted at site. 6. BHEL shall have right to disallow any O&M employee, if found unfit to perform. BHEL instructions issued in writing shall be binding on vendor who shall replace the person. 7. O&M personnel at site shall conform to general regulations in force at site and to any special instructions from local administration/KPCL. 8. O&M personnel at site shall be deemed to be aware of damages and risks incidental to conditions of BHEL land and works from time to time and BHEL shall not be responsible for any injury to personnel arising there from. 9. Training to O&M personnel It is the absolute responsibility of vendor to ensure imparting of necessary training to their O&M personnel to get them acquainted with the operations of various electrical and mechanical equipment of the power plant. For this purpose, vendor shall identify the O&M personnel well in advance and involve them during installation and commissioning stages so that they become well versed with various functional aspects of the power plant. 10. Availability of O&M personnel at power plant (a) Vendor shall ensure that operating staff are present in the power plant during plant operation (6:00 AM – 6:30 PM) every day. (b) Vendor shall ensure that certain minimum operating staffs are present at the power plant even on festivals, public holidays and any other unique occasions so that the plant is run under competent supervision on all days. (c) Security guards shall be available at the power plant on round the clock basis and on all the days. In case of any break in duty of security guard(s), replacement with alternate guard(s) shall be ensured during the break time. 11. O&M personnel shall, strictly, not use any part of the power plant for their personal / residential purposes. Their presence at the plant shall, strictly, be meant only for the purpose of operation and maintenance of plant.	
--	--	--

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 55 OF 58

8.4	O&M operations – daily basis (1) Water cleaning of SPV modules (cycle to be completed in maximum 15 days and repeated again) (2) Control room and inverter room cleaning – dry sweeping, wet mopping (3) Water wash cleaning of toilets, urinals. (4) Logging of DC, AC, grid parameters (current, voltage, power, energy) at PCUs & VCB/ C&R panels, transformer temperatures, equipment tripping/ breakdown, grid outage etc as per BHEL formats. (5) SCADA data station / PC operations for daily monitoring of weather parameters, trend graphs and urgent reporting to BHEL in case of any problems / anomalies observed with any of the parameters. (6) Drinking water to be arranged for O&M personnel at site.	
8.5	O&M activities – weekly basis (1) Removal of garbage from solar array field, switchyard, roads, drains, pathways, sand buckets; logging in registers with signatures of operating persons and in-charge. (2) Monitoring and logging of fire extinguisher levels / pressures as per BHEL formats	
8.6	O&M activities – monthly basis (1) Inspection of fire extinguishers (weight, pressure indication, physical status etc) followed by refilling actions, if necessary, based on indications. Report to be submitted as per BHEL approved recording formats. (2) Earthing resistance measurements for solar array structures, control room equipment, switchyard equipment, lightning arrestors (ESE): measured values shall be recorded in registers and reported to BHEL as per BHEL approved recording formats. (3) Submission of values / status of plant parameters and events for the corresponding month, as below, as per BHEL approved formats: a. Daily values of solar array strings (SMB parameters) b. Daily values of weather parameters (solar energy, wind speed, ambient temperature) c. Daily energy generation d. Events (with date, time) of faults / tripping / breakdown of equipment e. Events (with date, time) of grid outage f. Events (with date, time) of equipment damages, accidents and thefts g. Activities of module cleaning (4) Monthly reports shall be submitted to BHEL for all the above data. (5) Energy generation / meter reading report to be prepared and submitted to the concerned department (STATE ELECTRICITY SUPPLY & TRANSMISSION BOARDS etc). Signatures from BHEL's customer and substation representatives shall be obtained wherever required.	
8.7	O&M activities - quarterly basis (1) Cleaning of PCUs, VCB panels, C&R panels, ACBD, IRDB, FCBC, battery banks etc to remove accumulated dust. (2) Monitoring and status review, followed by rectification / calibration / replenishment / replacement actions as necessary and applicable for following: (a) Spare items of all electrical equipment (b) First aid box items - medicines and accessories (c) Safety gadgets (d) Tool kits and measuring instruments (e) Yard lights (f) Pumps, starters	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 56 OF 58

	(g) Control room appliances: air conditioners, lights, fans, exhaust fans, switch boards etc (3) Pest control for control room (rats, snakes etc) – sprays, chemicals, medicines etc to be applied wherever required. (4) Submission of quarterly report on above activities to BHEL. (5) Cleaning of water storage tanks	
8.8	O&M activities – yearly basis (1) BDV measurements for oil samples from all the transformers and submission of report to BHEL. (2) Filtration of oil to be arranged, if required, based on BDV measurement report. (3) Lubrication of moving contacts (VCBs, GOS switches, Earth switches etc) with appropriate grease etc (4) Cleaning of sewerage lines, septic tanks (if found necessary) (5) Painting of switchyard gate / fencing, earthing chambers, other steel structures within control room and switchyard if required based on conditions of rusting etc. (6) Checking tightness of hardware in solar array structures and tightening wherever required. (7) Checking tightness of power cable terminations in SPV modules (MC4), SMBs, electrical panels of control room and switchyard.	
8.9	O&M activities - as and when required (contextual basis) (1) Monitoring and operation of plant electrical equipment as and when required: (a) GOS Air break switches (b) VCB on/off: local operations from outdoor HT panel and remote operations from indoor remote annunciation panel (c) Settings of numerical relays in HT panels: review and revision in consultation with BHEL. (d) ACB on/off operations on LT side. (e) PCU operations: emergency close, LCD displays (selection of settings, monitoring the DC/AC/event/fault status parameters), operation of duct fans. (f) Battery and battery charger operations (g) Bore well pump operations to fill the storage tanks. (2) Coordinating, on behalf of BHEL, and obtaining renewal of statutory licenses, clearances and approvals from state departments such as KPCL / KPTCL/ CEIG/etc. (3) Repair and replacement of vendor supplied items, by vendor, with urgent action plans and implementation, when the items are found non-working / damaged. The same shall be reported to BHEL within 12 hours from time of observation. (4) Reporting, on an immediate basis (within max 2 hours) of functional problems / damages in BHEL supplied items to facilitate repair / replacement by BHEL. Further, vendor shall correspond / coordinate with respective equipment vendors / service centers, on behalf of BHEL, for getting the service engineers to the site. Later, coordinating with the service engineers during their visit to site, and assisting them in the trouble shooting process until the problem is resolved. Vendor shall report to BHEL (within max 2 hours) immediately after the problem is resolved. (5) Vendor shall keep updating the spares inventory at the site every time there is consumption of spare items towards replacement. In case of shortage of spares, the same shall be reported on an urgent basis (with max 2 hours) to BHEL. (6) Coordinating with sub-station upon grid failures, line problems etc and	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 57 OF 58

	implementing the needful steps to restore the plant to normal operation. (7) The electrical charges for the auxiliary consumption and broadband internet, telephone charges, if any, of the SPV plant during the entire period will be in scope of the vendor (8) Theft incidents: immediate reporting to BHEL, filing FIRs with police stations on behalf of BHEL, coordination for site inspection by insurance companies and clearance of insurance claims, logging of events (date, time) and maintaining records. (9) Accidents: immediate reporting to BHEL, coordinating with hospitals, logging of events (data, time) and maintaining records. (10) Procurement of all O&M consumables for fulfilling the activities detailed above will be in the scope of vendor. (11) Grass cutting – quarterly once or if when the height of grass is more than 2 feet from ground level whichever is earlier.	
--	---	--

9.0 Documents to be submitted for BHEL approval after receipt of purchase order

9.1	BHEL approval shall be obtained for the following technical documents, which shall be submitted to BHEL in phased manner based on priority sequence of activities. However, it shall be ensured that all documents are submitted within 14 days from date of purchase order.	
9.2	Vendor, make, model number / part number, specification / sizes / dimensions / drawings / datasheets of all the vendor supplied items.	
9.3	General arrangement drawings / schemes / layouts etc with bill of materials / quantities shall be submitted for the following (list is indicative and not limited to): (1) SMB Mounting structure (2) Transformer foundation pedestal (3) Cable support structure for 1Cx300 sq-mm cables between inverter room and transformers (4) Cable trench layout in array yard, switchyard (5) Foundations for Switchyard equipment (6) GTP and drawings of Switchyard equipment – GOS, LA, ACSR, insulators (7) Details of power, control, communication and OFC cable (8) ESE Lightning arrestor arrangement with foundation details (9) Yard lights –switchyard, compound wall/chain link fencing, approach road. (10) Water pipeline layout from bore wells to storage tank (11) Water pipeline layout from storage tank to solar array field for module cleaning system with pressure calculations (12) Fire alarm system scheme / layout (13) Cable support structures and cable ladders within control room and inverter rooms	
9.4	Quality assurance plans for items listed under clause 7.0	
9.5	Detailed activity-time chart for project implementation.	
9.6	Detailed manpower deployment schedule.	

	PURCHASE SPECIFICATION; GROUP: PHOTOVOLTAICS SUPPLY OF BOS ITEMS, I&C, O&M FOR 10MW SPV POWER PLANT AT CHANDAPUR VILLAGE, SHIGGAON TALUK, HAVERI DIST., KARNATAKA	PS-439-1097
		Rev No: 00
		PAGE : 58 OF 58

10.0 Codes and Standards:

IS:7098 (Part -I)	Specification for XLPE insulated PVC sheathed cables. Part-I: For working voltages upto 3.3 KV
IS:1554 (Part-I)	Specification for PVC insulated cables for working voltages up to and including 1100V
IS : 3975	Low Carbon Galvanized steel wires, formed wires and tapes for armouring of cables.
IS : 4905	Methods for random sampling.
IS : 5831	PVC insulation and sheath of electrical cables.
IS : 8130	Conductors for insulated electrical cables and flexible cords.
IS : 10418	Specification for drums for electric cables.
IS : 10810	Methods of tests for cables
IS:2026	Power Transformers
IS: 1255	Code of practice for installation and maintenance of power cables up to and including 33 KV rating
IS: 9921	ISolators


BH-KP0H-005

DRG. No.

DETAILS

Module Type	Poly Crystalline
BHEL Model	L24270P
No. of modules in one string	20
Total No. of Strings	1648
Total No. of Moduels	32960
String Monitoring Box (SMB)	24 Positive & 24 Negative input 1 Positive & 1 Ngative output
No. of SMBs per Inverter	9
Total No. of Inverters	8
Rating of Inverter	1250 KW @ 50 degC
Cable Size-String to SMB	1Cx6 mm Copper Cable
Cable Size-SMB to Inverter	1Cx300 sq mm Al armored cable

Typical Connection Diagram of a PV String

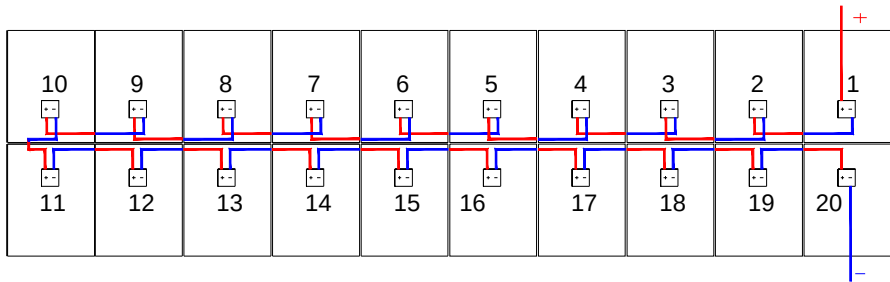

DISTRIBUTION OF PV MODULES :

Inverter No.	No. of SMBs per inverter	No. of strings per inverter	No. of modules per inverter	PV Module rating	DC capacity connected to inverter
1 to 6	9	206	4120	310	1277 KWp
7	9	203	4060	315	1278 KWp
8	9	209	4180	305	1274 KWp


TECHNICAL PARAMETERS OF PV MODULES :

NOTE: THIS DRAWING IS TENTATIVE AND FOR TENDER PURPOSE ONLY.

PROJECT : 10MW Solar Photovoltaic Power Plant, Chandapura, Haveri
CUSTOMER: KPCL

BHARAT HEAVY ELECTRICALS LIMITED.
ELECTRONICS DIVISION, BANGALORE


REV.	DATE	ALTERED	LNK	REV.	DATE	ALTERED	LNK		NAME	SIGN	DATE
02	19.01.17	CHECKED	SLR	01	30.12.16	CHECKED	SLR				
		APPROVED	NHK			APPROVED	NHK				
Revised with three ratings of PV Modules				Revised as per KPCL comments dated 24.12.16				DRAWN	LNK		22.11.16
								CHECKED	SLR		22.11.16
								APPROVED	NHK		22.11.16



TITLE:				No. OF SHEETS	4
SINGLE LINE DIAGRAM-DC				SHEET No.	1
WBS. No.				DRG. No.	REV
				BH-KP10H-005	02

BH-KP0H-005

DRG. No.

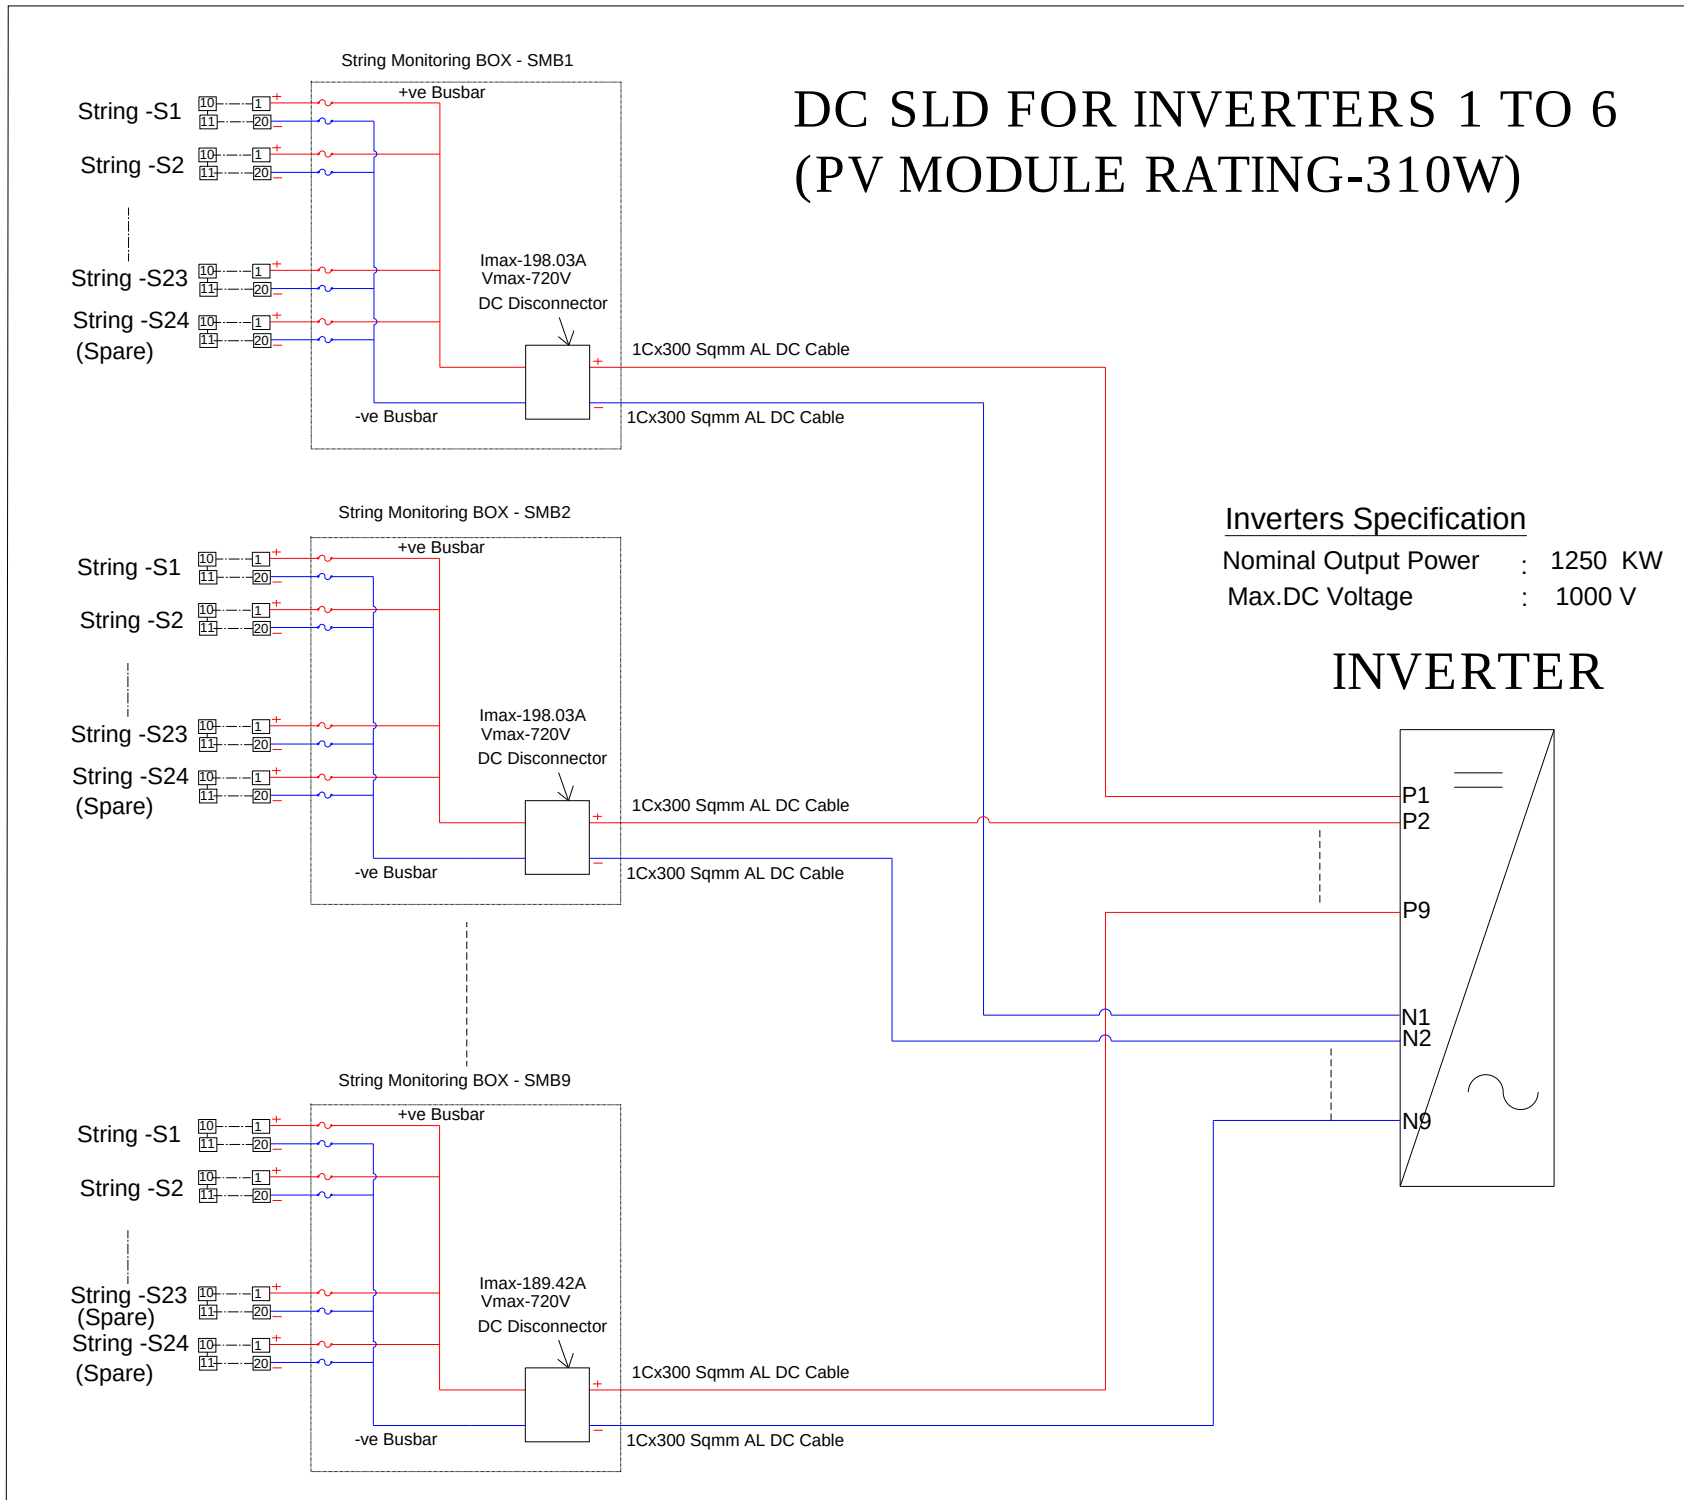

**NOTE: THIS
DRAWING IS
TENTATIVE AND
FOR TENDER
PURPOSE ONLY.**


Note:

- This scheme is applicable to Inverter Nos. 1 to 6.
- All SMBs shall have provision for 24 strings. However, 8 SMBs shall be connected with 23 strings (1 string will be spare) and 1 SMBs shall be connected with 22 strings (2 strings will be spare) - Total 206 strings per inverter.

PROJECT : 10MW Solar Photovoltaic Power Plant, Chandapura, Haveri
CUSTOMER: KPCL

BHARAT HEAVY ELECTRICALS LIMITED.
ELECTRONICS DIVISION, BANGALORE

REV.	DATE	ALTERED CHECKED	LNK SLR	REV.	DATE	ALTERED CHECKED	LNK SLR	NAME	SIGN	DATE
02	24.01.17	APPROVED	NHK	01	30.12.16	APPROVED	NHK			
Revised with three ratings of PV Modules				Revised as per KPCL comments dated 24.12.16				DRAWN	LNK	22.11.16
								CHECKED	SLR	22.11.16
								APPROVED	NHK	22.11.16

DEPT.
SC&PVCODE
439

TITLE:

SINGLE LINE DIAGRAM-DC

WBS. No.

DRG. No.

BH-KP10H-005

No. OF
SHEETS

SHEET
No.


4

2

REV
02

BH-KP0H-005

DRG. No.

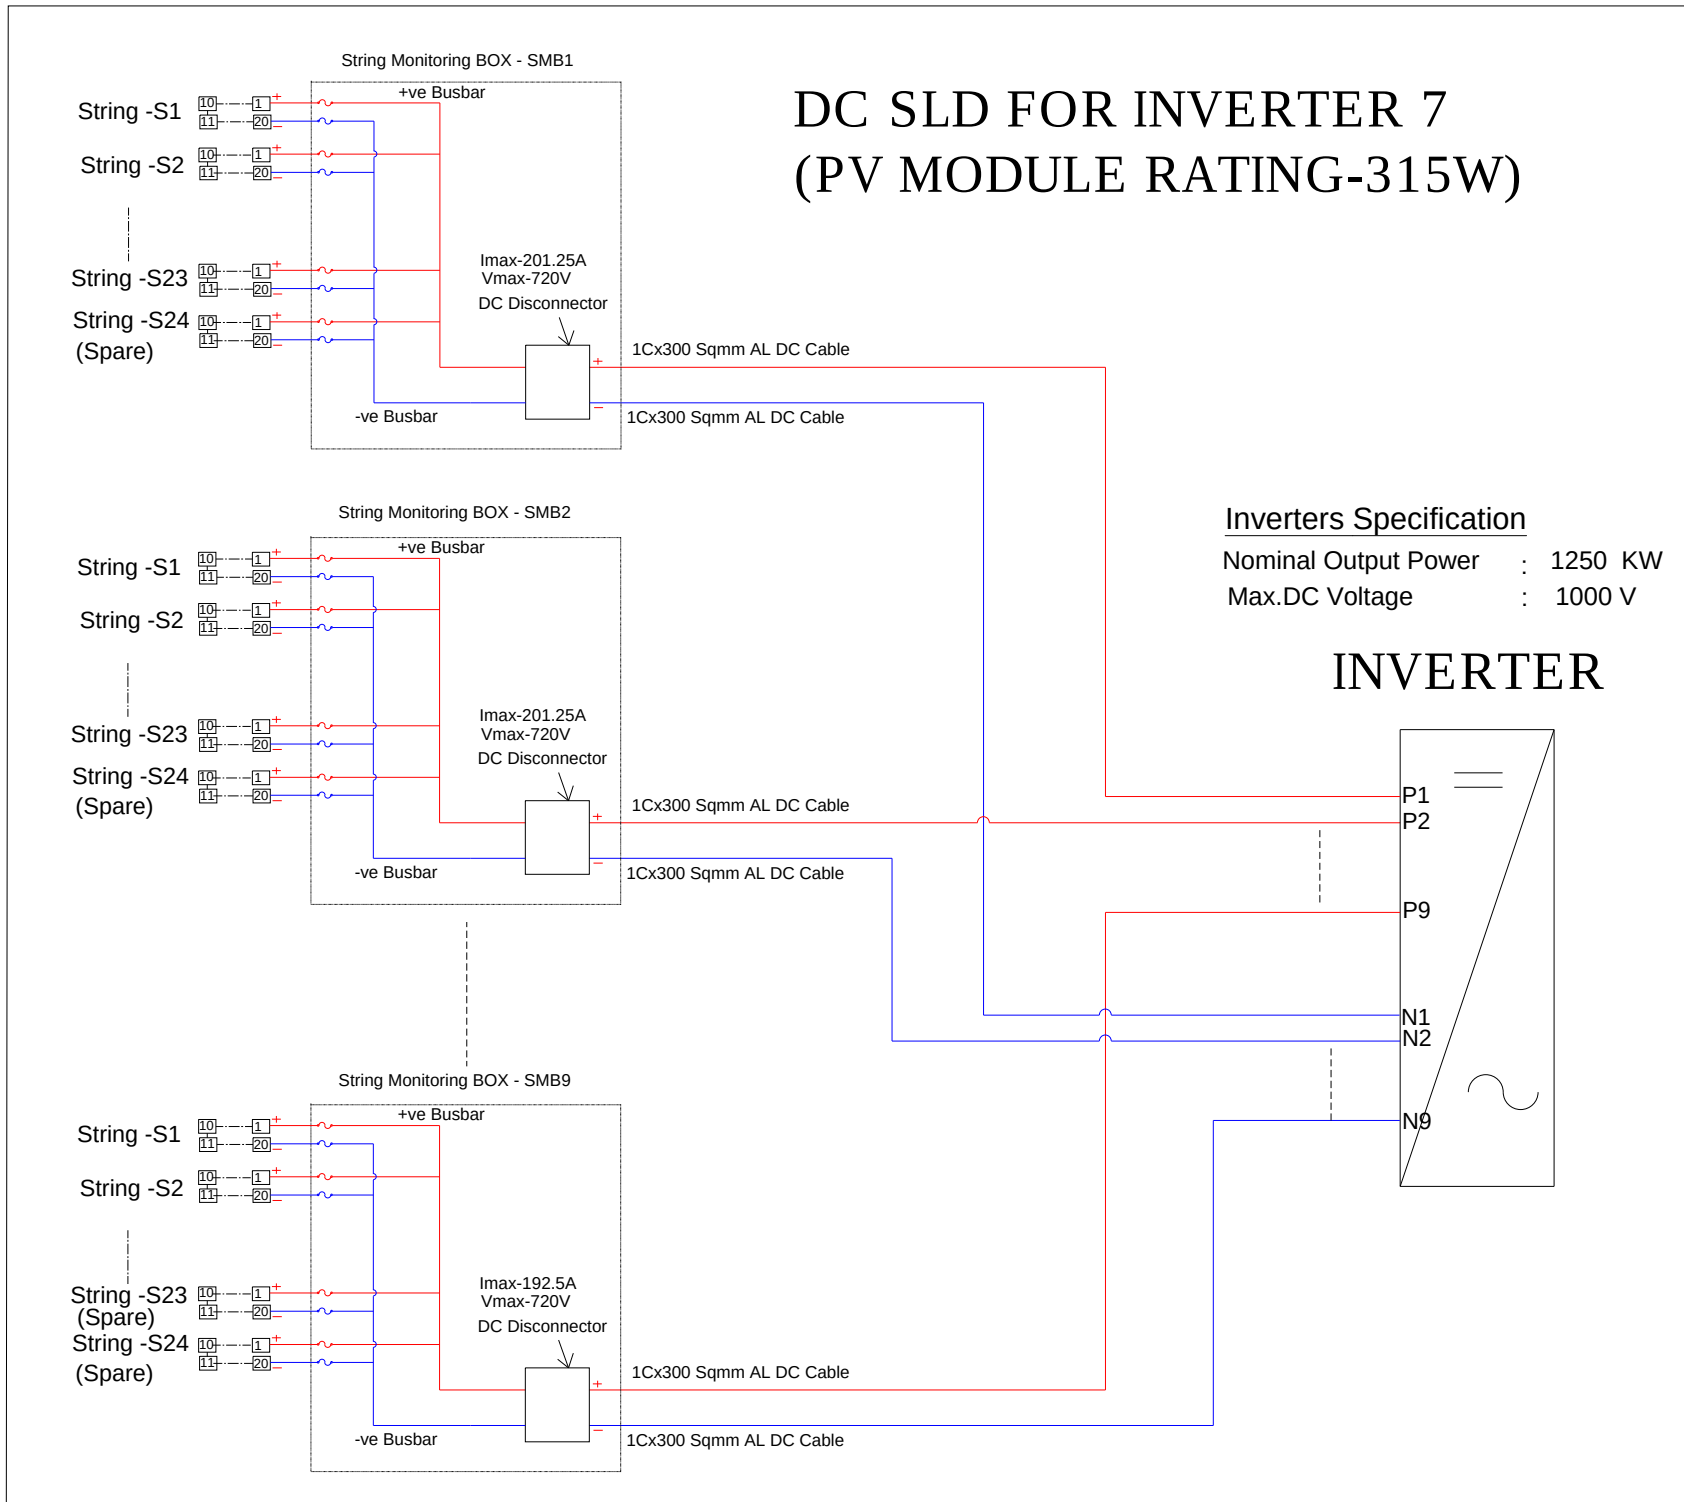

**NOTE: THIS
DRAWING IS
TENTATIVE AND
FOR TENDER
PURPOSE ONLY.**

Note:

1. This scheme is applicable to Inverter No. 7.
2. All SMBs shall have provision for 24 strings. However, 5 SMBs shall be connected with 23 strings (1 string will be spare) and 4 SMBs shall be connected with 22 strings (2 strings will be spare) - Total 203 strings per inverter.

PROJECT : 10MW Solar Photovoltaic Power Plant, Chandapura, Haveri
CUSTOMER: KPCL

BHARAT HEAVY ELECTRICALS LIMITED.
ELECTRONICS DIVISION, BANGALORE


SINGLE LINE DIAGRAM-DC

REV.	DATE	ALTERED	LNK	REV.	DATE	ALTERED	LNK
02	24.01.17	CHECKED	SLR	01	30.12.16	CHECKED	SLR
		APPROVED	NHK			APPROVED	NHK
Revised with three ratings of PV Modules				Revised as per KPCL comments dated 24.12.16			

DRAWN	LNK	22.11.16
CHECKED	SLR	22.11.16
APPROVED	NHK	22.11.16



DEPT.	CODE
SC&PV	439




TITLE:		No. OF SHEETS	4
WBS. No.		SHEET No.	3
DRG. No.		REV	02

BH-KP10H-005

BH-KP0H-005

DRG. No.

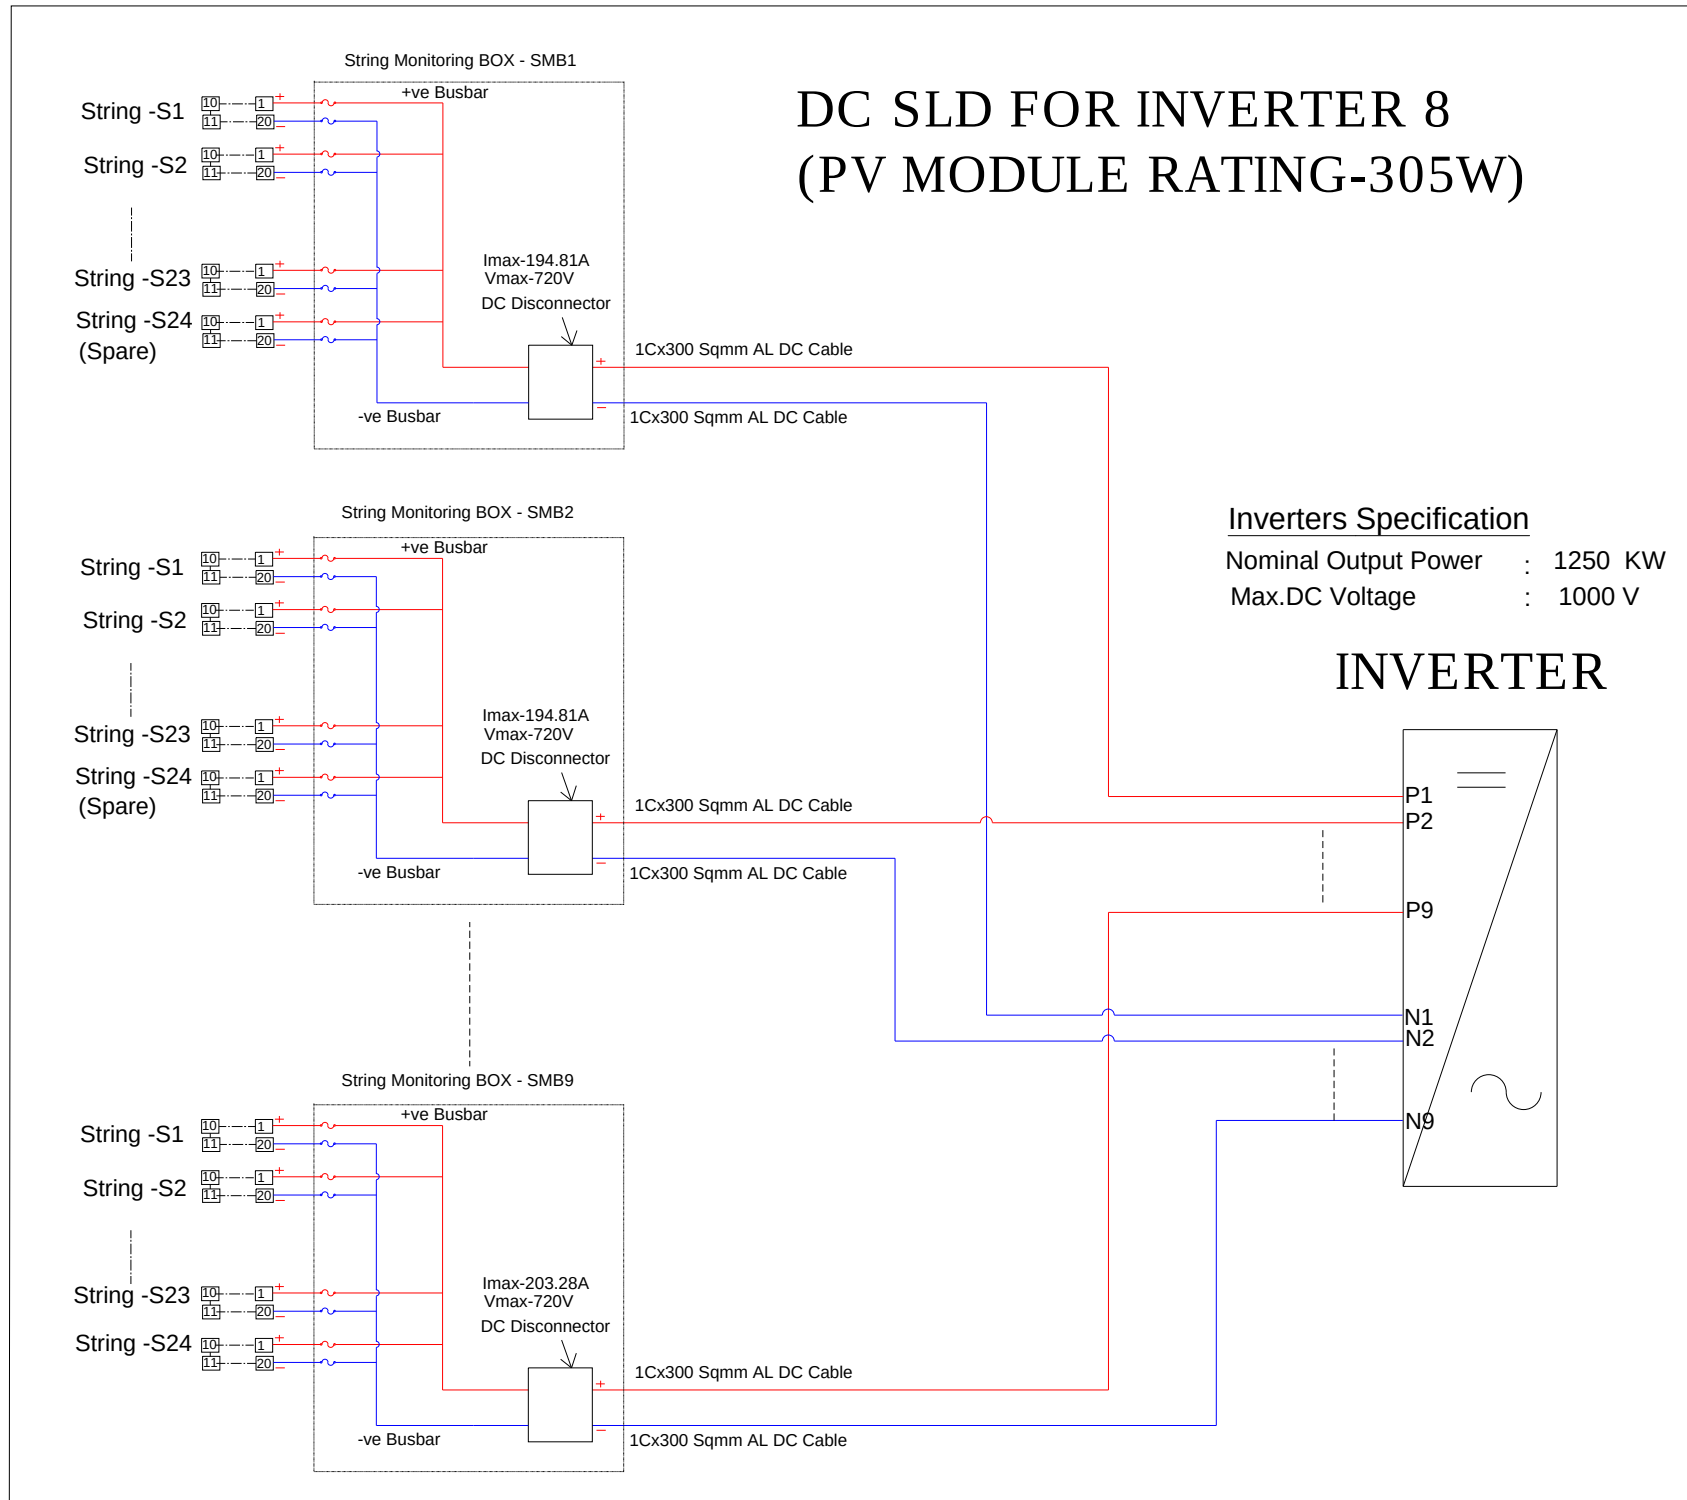

**NOTE: THIS
DRAWING IS
TENTATIVE AND
FOR TENDER
PURPOSE ONLY.**

Note:

1. This scheme is applicable to Inverter No. 8.
2. All SMBs shall have provision for 24 strings. However, 7 SMBs shall be connected with 23 strings (1 string will be spare) and 2 SMBs shall be connected with 24 strings - Total 209 strings per inverter.

PROJECT : 10MW Solar Photovoltaic Power Plant, Chandapura, Haveri
CUSTOMER: KPCL

BHARAT HEAVY ELECTRICALS LIMITED.
ELECTRONICS DIVISION, BANGALORE


REV.	DATE	ALTERED	LNK	REV.	DATE	ALTERED	LNK		NAME	SIGN	DATE
02	24.01.17	CHECKED	SLR	01	30.12.16	CHECKED	SLR				
		APPROVED	NHK			APPROVED	NHK				
Revised with three ratings of PV Modules				Revised as per KPCL comments dated 24.12.16				DRAWN	LNK		22.11.16
								CHECKED	SLR		22.11.16
								APPROVED	NHK		22.11.16



DEPT.	CODE
SC&PV	439

TITLE:		No. OF SHEETS	4
SINGLE LINE DIAGRAM-DC		SHEET No.	4
WBS. No.		DRG. No.	BH-KP10H-005
		REV	02

COPYRIGHT AND CONFIDENTIAL
The information on this document is the property of Bharat Heavy Electricals Limited.
It must not be used directly or indirectly in anyway detrimental to the interest of the Company



PV ARRAY CAPACITY	: 10.21MWp
PV MODULES(L24270)	: 32960 nos
RATING OF MODULE	: 305/310/315Wp
NO. OF MODULE/STRING	: 20 nos
TOTAL NO OF STRINGS	: 1648 nos
TOTAL NO OF STRUCTURES	: 1648 nos
TOTAL NO OF SMBs	: 72 nos
NO. OF INVERTER 1250KVA	: 8 nos
NO OF STRINGS/INVERTER	: 203/206/209
NO OF SBMs/INVERTER	: 9 nos

20 module structure 1648 nos

10x3.714m

8x13m

11x22m

Inverter room

Control room with Inverter room

NAME OF CUSTOMER/PROJECT	CUSTOMER : KPCL, HAVERI PROJECT: 10 MWp SPV POWER PLANT
--------------------------	--

ALL DIMENSIONS ARE IN METERS

DEPT. SCPV	FOR UNSPECIFIED-TOLERANCES		SCALE	WEIGHT(g)	REF. TO ASSY. DRG.	ITEM NO.	NO. OF ITEM	BLDG. VAR.
CODE 439	REFER ED 0230499		NTS					
TITLE				DRAWING NO.				REV.
10MW PV ARRAY LAYOUT				BH-KP10-012				00
				SHEET NO. 01		NO. OF SHEETS		

7

[illegible]

 KPCL 10MWp SOLAR POWER PLANT AT CHANDAPUR VILLAGE, SHIGGON TALUK, HAVERI DIST																																																																																																														
 BHARAT HEAVY ELECTRICALS LTD ELECTRONICS DIVISION, BANGALORE																																																																																																														
FILE	INVERTER ROOM LAYOUT																																																																																																													
<table><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>																																																																																																					<table><tr><td>SCALE</td><td></td><td>DRAWING NO. BH - KP10IS - 010</td></tr><tr><td></td><td></td><td>DATE _____</td></tr><tr><td></td><td></td><td>REV. _____</td></tr></table>	SCALE		DRAWING NO. BH - KP10IS - 010			DATE _____			REV. _____
SCALE		DRAWING NO. BH - KP10IS - 010																																																																																																												
		DATE _____																																																																																																												
		REV. _____																																																																																																												

7

12.12.12 12


																DEPT. SC&P STATUS CONTRACT DISTRIBUTION REL DATE ALB GO APP VAL DATE ALB GO APP VAL DATE ALB GO APP VAL PREPARED BY OFFICE				 KPCIL 10MW SOLAR POWER PLANT AT CHANDAPUR VILLAGE, SHIGON TALUK, HAVERI DIST BHARAT HEAVY ELECTRICALS LTD ELECTRONICS DIVISION, BANGALORE															
REL DATE ALB GO APP VAL DATE ALB GO APP VAL DATE ALB GO APP VAL																REL DATE ALB GO APP VAL				TITLE															
																				INVERTER ROOM LAYOUT															
6																7				8															
5																4				3															
																				SCALE = 1/8" DRAWING NO. SHEET 1 OF 1 REV. CO															

BH-KP0H-006

DRG. No.

NOTE: THIS DRAWING IS TENTATIVE & FOR TENDER PURPOSE ONLY.

33KV OUTDOOR SWITCHYARD AT INVERTER ROOM

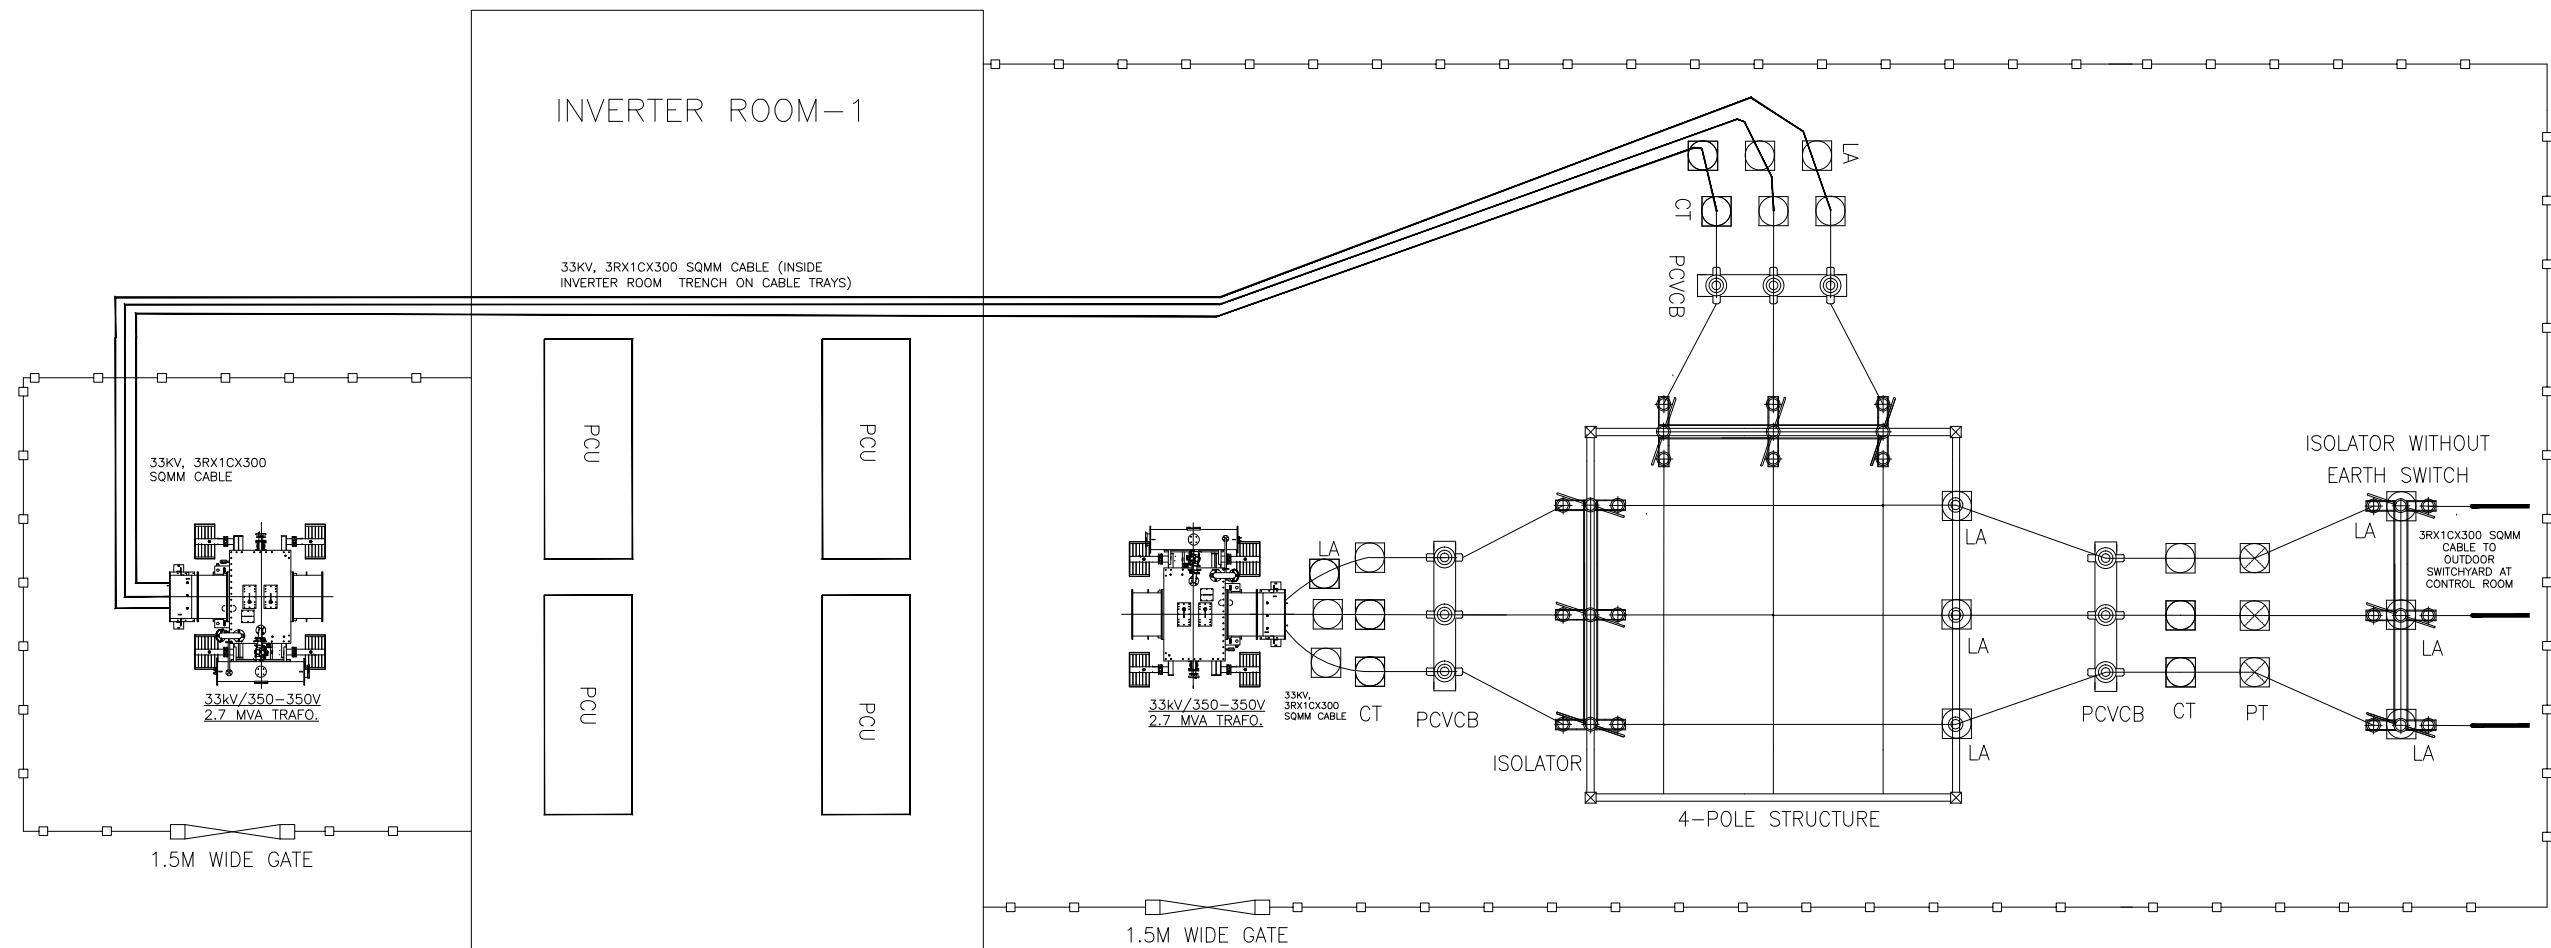

PLAN

CLEARANCES BETWEEN EQUIPMENT SHALL BE AS PER CEIG REGULATION & ELECTRICAL RULES.

PRODUCT : 10MW Solar Photovoltaic Power Plant
CUSTOMER: KPCL, Chandapur Village, Haveri Dist

BHARAT HEAVY ELECTRICALS LIMITED.
ELECTRONICS DIVISION, BANGALORE

33KV OUTDOOR SWITCHYARD LAYOUT

No. OF SHEETS
02

SHEET No.
01

REV
00


DRG. No.
BH-KP10H-006

WBS. No.

REV.	DATE	ALTERED	REV.	DATE	ALTERED		NAME	SIGN	DATE	
		CHECKED			CHECKED					
		APPROVED			APPROVED					
						DRAWN				
						CHECKED				
						APPROVED				



DEPT. CODE



900-H-006

DRG. No.

2

3

4

5


6

7

8

NOTE: THIS DRAWING IS TENTATIVE & FOR TENDER PURPOSE ONLY.

33KV OUTDOOR SWITCHYARD AT CONTROL ROOM

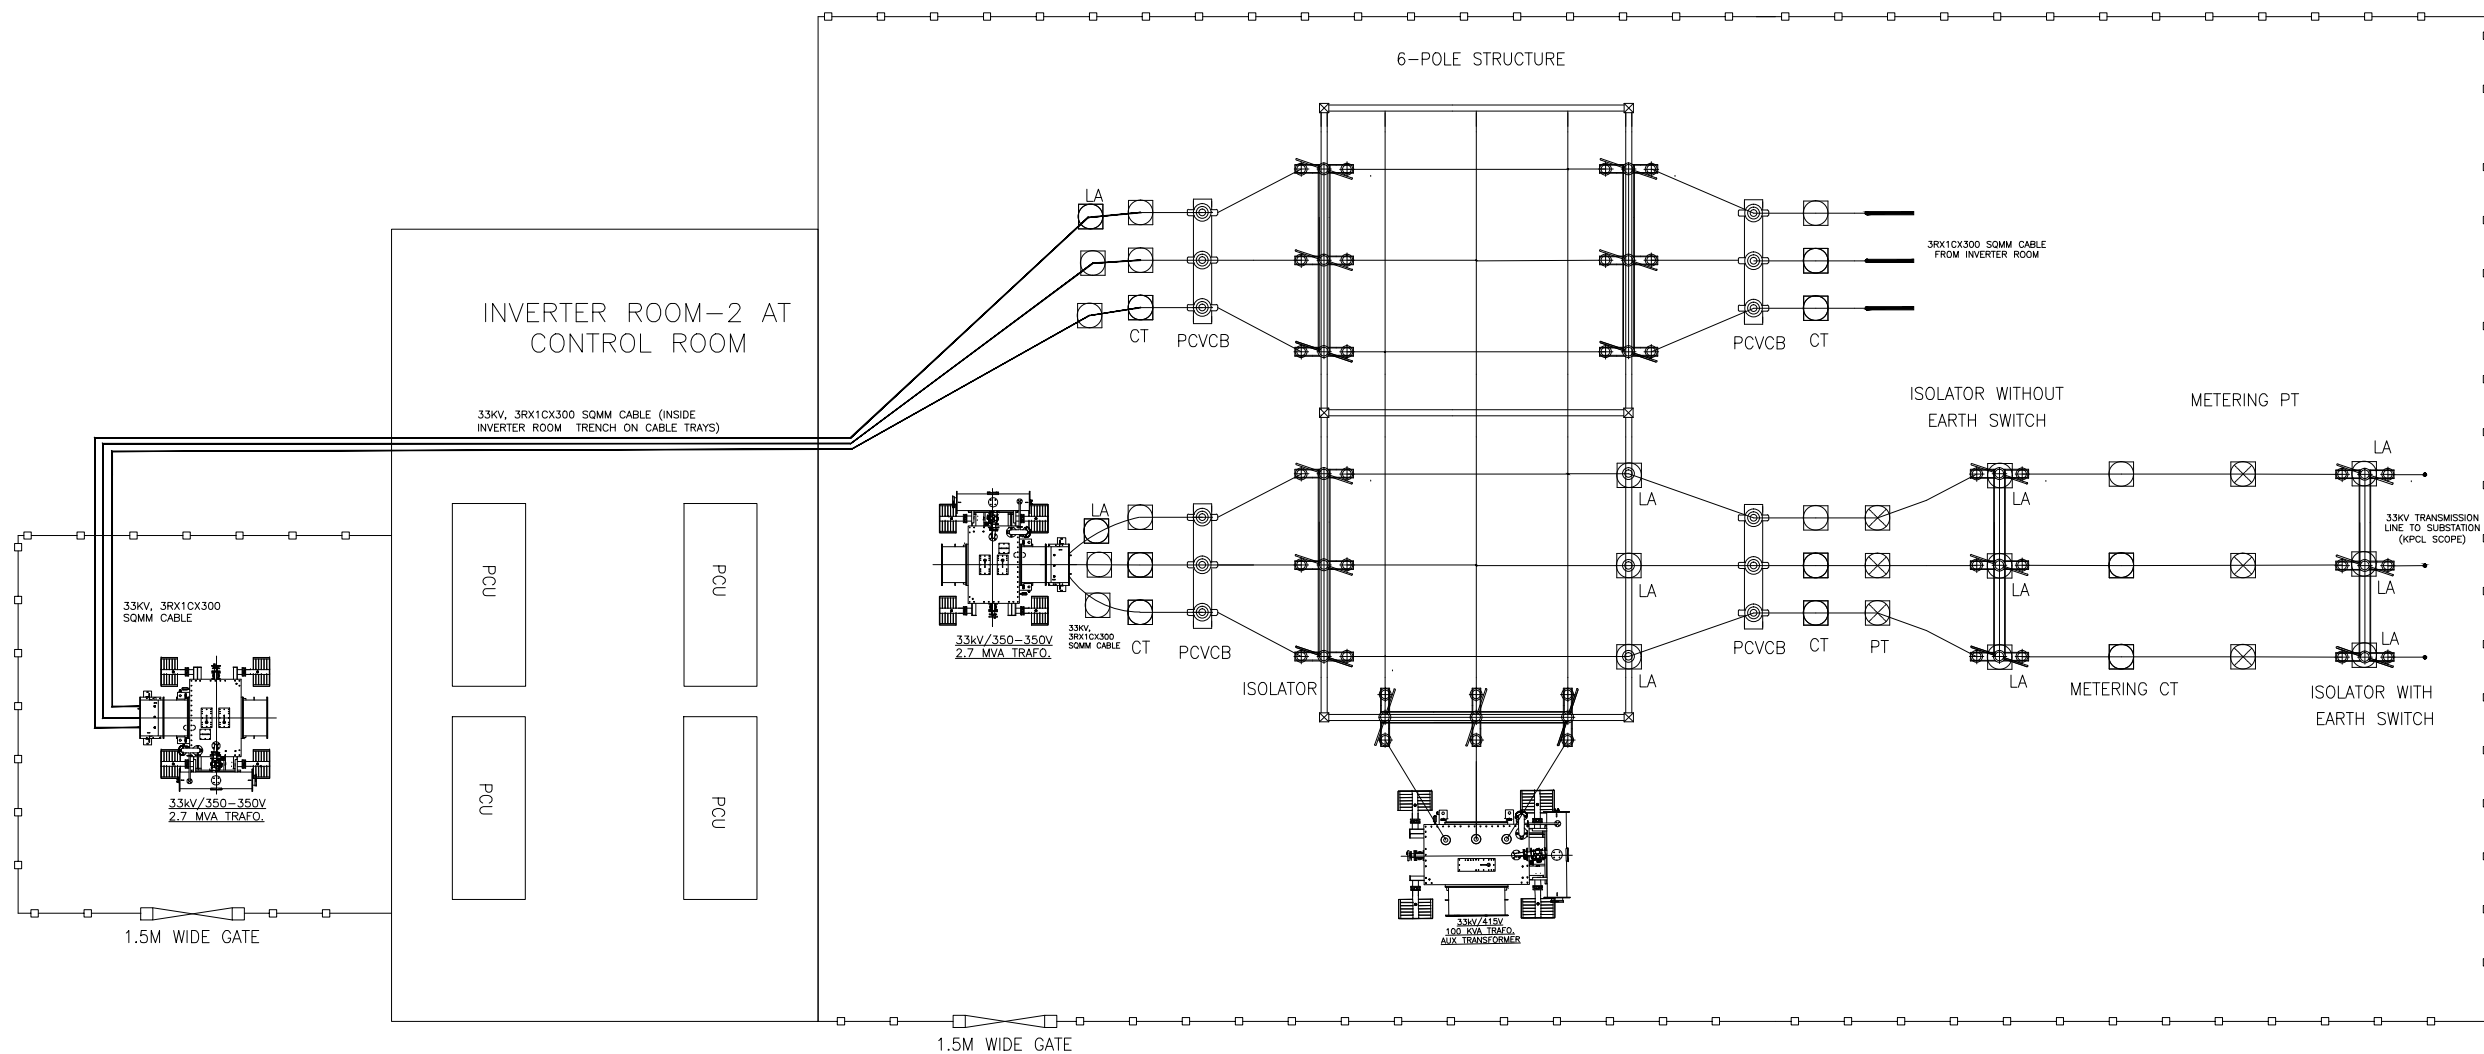

PLAN

CLEARANCES BETWEEN EQUIPMENT SHALL BE AS PER CEIG REGULATION & ELECTRICAL RULES.

PRODUCT : 10MW Solar Photovoltaic Power Plant
CUSTOMER: KPCL, Chandapur Village, Haveri DistBHARAT HEAVY ELECTRICALS LIMITED.
ELECTRONICS DIVISION, BANGALORE

33KV OUTDOOR SWITCHYARD LAYOUT

No. OF
SHEETS 02SHEET
No. 02REV
00


WBS. No.

DRG. No.
BH-KP10H-006

REV.	DATE	ALTERED	REV.	DATE	ALTERED		NAME	SIGN	DATE
		CHECKED			CHECKED				
		APPROVED			APPROVED				
						DRAWN			
						CHECKED			
						APPROVED			



DEPT. CODE



SPECIAL COMMERCIAL CONDITIONS OF CONTRACT (for foreign vendors)				
RFQ No. UPK0000980 Dtd. 04-02-2017 Due on 15-02-2017				
Sl. No.	Terms	Particulars	Confirmation	Deviation/Remarks
1	Pre Qualification Requirement (PQR)	1. Vendor should have executed atleast one contract of indoor / outdoor electrical installation of 33KV minimum in power plants or sub-stations in India with scope including both supply and erection for total value, not less than Rs. 2 crores. As evidence to this, vendor shall submit (a) certification from clients for completion of supply and erection (b) copies of Purchase orders from the clients.	Complied	
		2. Vendor shall furnish solvency certificate issued by Nationalized / scheduled banks for minimum worth of Rs. 1 crore with date of issue not before three months from the tender opening date.	Complied	
		3. Vendor shall be a registered company for a period not less than one year from date of tender opening. As evidence to this, vendor shall submit certificate of registration of the company.	Complied	
2	Bidding	(a) Bid has to be submitted as Two Part – Techno Commercial Bid (Part-1) & Price Bid (Part-II). Bids shall be submitted through e-Procurement portal https://bheleps.buyjunction.in of M/s. Mjunction Services Limited.	Complied	
		(b) Annexures A & A1 to be submitted along with technical bid (Part-I) & Annexure A2 to be submitted along with Price bid (Part-II).	Complied	
		(c) Clause-wise compliance to BHEL Purchase specification along with all documents as called in Technical specification to be submitted along with technical bid(Part-1).	Complied	
3	Price basis:	Firm i.e., from the date of PO to completion of supply if I&C is not applicable. If I&C is in supplier's scope, then the prices shall remain Firm till commissioning & handing-over of the complete system. (PVC clause not acceptable).	Complied	
4	Evaluation of L1 vendor	Over all L1 for "Supply+I&C+O&M" on "FOR" basis to site will only be considered.	Complied	
5	Octroi / Entry Tax	Any Entry Tax / Octroi if applicable for supplies to these project location, the same has to borne by the vendor.	Complied	
6	Terms of Delivery:	CIF Seaport/CIF Airport/FCA Airport (Indicate name of Seaport/Airport)	Acceptable / Not acceptable	
7	Delivery Period	(a) Supply: 4 Wks from drawing approval Date (b) Drawing / Quality Plan Submission: 1 Wk from PO Date (c) I&C: 4 Weeks from supply	Acceptable / Not acceptable	

8	Payment Term	For Supply: 1) 80% of the basic value (excluding I&C charges) will be paid with 45 days credit, against Sight draft, from the date of AWB/BOL on submission of complete set of documents as in PO. 2) 10% of basic supply value will be paid on completion of I&C against submission of supplementary invoice along with proof of completion of I&C along with I&C charges (if any). 3) Balance 10% (retention money) against submission of supplementary invoice along with PBG valid for Warranty Period+3 months Claim Period from BHEL Consortium Bank. For I&C: 100% on completion of I&C/Supervision and certification line item wise on pro-rata basis. For O&M: Quarterly payment of 100% O&M charges shall be done against report certified by BHEL. NOTE: In exceptional cases, if vendor fails to submit PBG after supplies, vendors can also accept for the final 10% payment, payable after the warranty period + 3 months of claim period against supplementary invoice subject to the completion of commissioning (if applicable) as PBG is linked to Warranty period.	Acceptable / Not acceptable	
		(b) For any deviation in payment term, the offer will be liable for loading as per Clause G of ITB (Doc Ref : SCPV: BOS: ITB - Rev 01)	Acceptable / Not acceptable	
9	Warranty	(a) Warranty for Supply: 18 Months from Supply or 12 Months from I&C, whichever is earlier. (b) Warranty for Workmanship & I&C: 12 months from I&C (c) O&M: 5 Years from date of commissioning	Acceptable / Not acceptable	
10	Pre Shipment Inspection	(a) Pre Shipment Inspection will be carried out by BHEL/Customer for which test report shall be sent one week in advance.	Acceptable / Not acceptable	
		(b) Inspection charges & co-ordination for third party inspection shall be to your account. Please confirm that your quotation for individual item includes inspection charges by any of BHEL approved inspection agencies. In case nothing is mentioned regarding inspection charges, it will be presumed that these are included in quoted prices. Please confirm.	Acceptable / Not acceptable	
11	Penalty	(a) Supply: Penalty of 0.5% per week at the basic price of the good for undelivered quantity of supply portion, subject to a maximum of 10%. For Supply, Pre Shipment Inspection Call Letter Date (Receipt of test report) will be treated as delivery for purpose of penalty.	Acceptable / Not acceptable	
		(b) For any deviation in penalty term, the offer will be liable for loading as per Clause No. G, Point No.(b) of ITB (Doc Ref : SCPV: BOS: ITB - Rev 01)	Acceptable / Not acceptable	
12	PBG	(a) PBG shall be furnished in the BHEL prescribed format. (b) Deviation if any Please specify.	Acceptable / Not acceptable	
13	Validity:	Quotation should remain valid for a period of 90 days from the due date.	Acceptable / Not acceptable	

14	Bank charges (If applicable):	(a) All Bank charges to seller's account	Acceptable / Not acceptable	
		(b) Deviation will be liable for loading as per Cl.G of ITB	Acceptable / Not acceptable	
15	Reverse Auction:	BHEL reserves the right to conduct Reverse auction.Procedure for the same will be informed by BHEL .	Acceptable / Not acceptable	
16	DUN No.	Please mention Dun & Bradstreet No.(DUN No.)		
17	Consignment Details	Weight and Dimension of consignment with packing	Furnished / To be furnished	
18	Despatch Documents	Despatch documents include AWB, Invoice, Packing list, Warranty certificate, O&M manuals	Acceptable / Not acceptable	
		One copy of Invoice, Packing list and Air Way Bill shall be faxed immediately after despatch. Also one copy of packing list to be kept inside each box for easy identification of material at site.		
19	Other terms & conditions	For any other Terms and Conditions, kindly refer to the following: A: ITB (document ref :SCPV: BOS: ITB - Rev 01) B: GCC (document ref: SCPV: BOS: GCC - Rev 01)	Acceptable / Not acceptable	
20	BOS %	The percentage of Supply and I&C and O&M values shall be in the range indicated below (approximately, with overall tallying to 100%) : (a) Supply : 34 to 38 % (b) I&C : 25 to 29 % (c) O&M : 35 to 39 % Successful bidder shall submit detailed billing break up for BHEL approval after placement of Purchase order.	Acceptable / Not acceptable	
21	Documents Submission	All the documents pertaining to I&C and O&M as per Annexure-C to be submitted as applicable.	Acceptable / Not acceptable	

AUTHORISED SIGNATORY WITH SEAL

ANNEXURE A1

TECHNICAL BID ENCLOSURE FOR COMPLIANCE OF QUOTE : UNPRICED BID (Foreign Vendors)							
RFQ No. UPK0000980 Dtd. 04-02-2017 Due on 15-02-2017							
Sl No.	Material Code	DESCRIPTION	ADDITIONAL DESCRIPTION	Quantity	Unit	Quoted	Currency
1	PS0679066985	Supply of MC4 connectors, cable ties,	SMB mounting structure, HDPE pipes, cable lugs, hardware, cable trays, cable tray supports as per clauses 5.5 to 5.15.	1	ST	Yes / No	
2	PS0679066993	Supply of Auxiliary power cables,	control cables, data communication cables, 33KV termination kits, lugs and glands as per clauses 5.18, 5.19, 5.25, 5.30 to 5.31.	1	ST	Yes / No	
3	PS0679067000	Supply of switchyard equipment	such as auxiliary transformer, 33KV lightning arresters, metering CTs, metering PTs, metering panels with ABT meters, GOS isolators, PSC poles, insulators, ACSR conductor required for four pole and two pole structures, items of switch yard fencing (fence, gate, angles), items for connecting to earthing, with all related miscellaneous accessories and hardware as per clauses 5.17, 5.24 and 5.26.	1	ST	Yes / No	
4	PS0679067019	Supply of ACDB, IRDB, Battery banks,	FCBC, UPS with battery, Weather Monitoring System as per the clauses 5.20 to 5.23.	1	ST	Yes / No	
5	PS0679067027	Supply of items of earthing system	for solar array field, control room, inverter room panels and switch yard equipment including Earthing electrodes, GI flats, copper strips, copper earthing cables (green) of min 25sq mm, CPVC pipes, Insulation bushes, heat shrinkable sleeves for control room copper strip earthing and all related miscellaneous hardware as per clauses 5.32 to 5.34.	1	ST	Yes / No	
6	PS0679067035	Supply of lightning arrestors	for solar array field (ESE type) with earthing items as per clause 5.35.	1	ST	Yes / No	
7	PS0679067043	Supply of items for yard lighting	system such as pole pipes, lamps, lamp fittings, CPVC pipes, junction boxes, cables, cable lugs, glands, related accessories, hardware as per clauses 5.36 and 5.38.	1	ST	Yes / No	
8	PS0679067051	Supply of items of module cleaning	system such as submersible pumps (for bore wells), booster pumps, water storage tanks, CPVC pipes with fittings, ball valves, nipples, hose pipes as per clauses 5.39 and 5.40.	1	ST	Yes / No	
9	PS0679067060	Supply of miscellaneous items	such as cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, tool kits, measuring instruments, office furniture as per clauses 5.41 to 5.49.	1	ST	Yes / No	

10	PS0679067078	Supply of safety related items	including fire alarm system, fire extinguishers, safety gadgets as per clauses 5.50 to 5.51.	1	ST	Yes / No	
11	PS0679067086	I&C: Temporary site office,	arranging electrical power and water for construction, construction of temporary storage yard, unloading and movement of consignments as per clauses 5.1 to 5.4	1	AU	Yes / No	
12	PS0679067094	I&C: Interconnection of SPV modules,	cabling from strings to SMBs, installation of string monitoring boxes including cable terminations, formation of cable trenches and laying of 1CX300 sq-mm cables up to PCUs and inspection thereof as per clauses 5.5 to 5.12.	1	AU	Yes / No	
13	PS0679067108	I&C: Erection of control room,	inverter room and security room electrical panels such as inverters, ACDB, IRDB, Security Room DB, FCBC, Battery bank, erection of cable trays and cable supports, routing and terminations of DC and AC cables up to LV side of transformers in transformer yard as per clauses 5.13 to 5.15 and 5.20 to 5.22.	1	AU	Yes / No	
14	PS0679067116	I&C: Erection of transformer	yard equipment such as transformers, VCB panels, C&R panels, CT, PT, GOS, 2P/4P/6P structures, 33KV cable laying and terminations, foundations, Transformer yard leveling, jelly spreading, fencing including gates as per clauses 5.16, 5.17, 5.24 to 5.27.	1	AU	Yes / No	
15	PS0679067124	I&C: Cable trenches, cable laying,	cable terminations for 33KV cables as shown in SLD between inverter room and control room and from control room up to two pole structure at plant boundary as per clauses 5.18, 5.19 and 5.25.	1	AU	Yes / No	
16	PS0679067132	I&C: Cable trenches, cable laying,	cable terminations for control, communication and OFC cables (between IR and control room & from SMBs to SCADA panels in IR and CMCS) related to inverters, transformers, VCB Panels, C&R panels, SCADA and other equipment as per clauses 5.28 to 5.31.	1	AU	Yes / No	
17	PS0679067140	I&C of earthing system	for solar array field, control room panels, inverter room panels and transformer yard equipment including installation of Chemical earthing electrodes, erection & electrical interconnection of earth chambers, earthing of module mounting structures, laying of copper earth strips in control room, installation of lightning arrestors (ESE) as per clauses 5.32 to 5.35.	1	AU	Yes / No	
18	PS0679067159	I&C of yard lights	for approach road, transformer yard and boundary wall including cable trenches, cable laying and cable terminations at the yard lighting poles as well as ACDB panel in control room and IRDB panel in inverter room as per clauses 5.36 to 5.38.	1	AU	Yes / No	

19	PS0679067167	I&C of module cleaning system	including construction of borewells, trenches for pipelines, laying of pipelines from bore wells to solar array field through water storage tanks, erection of submersible and booster pumps, ball valves, non-returnable valves as per clauses 5.39 and 5.40.	1	AU	Yes / No	
20	PS0679067175	I&C of miscellaneous and safety items	such as WMS, cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, office furniture, fire extinguishers, fire alarm system as per clauses 5.23, 5.41 to 5.51.	1	AU	Yes / No	
21	PS0679067183	I&C: Pre-commissioning inspections / checks / tests,	MRT tests and coordination with state and central departments such as KPTCL/CEIG/SECI etc. for necessary approvals/ clearances for commissioning, synchronization with grid and post-commissioning operation of the plant as per clause 5.52.	1	AU	Yes / No	
22	PS0679067191	O&M for 1st year as per clause 8.0	(1 AU= 3Months)	4	AU	Yes / No	
23	PS0679067205	O&M for 2nd year as per clause 8.0	(1 AU= 3Months)	4	AU	Yes / No	
24	PS0679067213	O&M for 3rd year as per clause 8.0	(1 AU= 3Months)	4	AU	Yes / No	
25	PS0679067221	O&M for 4th year as per clause 8.0	(1 AU= 3Months)	4	AU	Yes / No	
26	PS0679067230	O&M for 5th year as per clause 8.0	(1 AU= 3Months)	4	AU	Yes / No	

Note:

* The above format is to be used for Unpriced bid. Reproducing on letter head is acceptable.

BHEL is trying to avail Customs Duty & Excise duty exemption. Successful bidder shall support with all relevant documents.

AUTHORISED SIGNATORY WITH SEAL

ANNEXURE A2

TECHNICAL BID ENCLOSURE FOR COMPLIANCE OF QUOTE : UNPRICED BID (Foreign Vendors)

RFQ No. UPK0000980 Dtd. 04-02-2017 Due on 15-02-2017

Sl No.	Material Code	DESCRIPTION	ADDITIONAL DESCRIPTION	Quantity	Unit	UNIT RATE	Total value (Rate x Quantity)	Currency
1	PS0679066985	Supply of MC4 connectors, cable ties,	SMB mounting structure, HDPE pipes, cable lugs, hardware, cable trays, cable tray supports as per clauses 5.5 to 5.15.	1	ST			
	Unit rate in words :							
2	PS0679066993	Supply of Auxiliary power cables,	control cables, data communication cables, 33KV termination kits, lugs and glands as per clauses 5.18, 5.19, 5.25, 5.30 to 5.31.	1	ST			
	Unit rate in words :							
3	PS0679067000	Supply of switchyard equipment	such as auxiliary transformer, 33KV lightning arresters, metering CTs, metering PTs, metering panels with ABT meters, GOS isolators, PSC poles, insulators, ACSR conductor required for four pole and two pole structures, items of switch yard fencing (fence, gate, angles), items for connecting to earthing, with all related miscellaneous accessories and hardware as per clauses 5.17, 5.24 and 5.26.	1	ST			
	Unit rate in words :							
4	PS0679067019	Supply of ACDB, IRDB, Battery banks,	FCBC, UPS with battery, Weather Monitoring System as per the clauses 5.20 to 5.23.	1	ST			
	Unit rate in words :							
5	PS0679067027	Supply of items of earthing system	for solar array field, control room, inverter room panels and switch yard equipment including Earthing electrodes, GI flats, copper strips, copper earthing cables (green) of min 25sq mm, CPVC pipes, Insulation bushes, heat shrinkable sleeves for control room copper strip earthing and all related miscellaneous hardware as per clauses 5.32 to 5.34.	1	ST			
	Unit rate in words :							
6	PS0679067035	Supply of lightning arrestors	for solar array field (ESE type) with earthing items as per clause 5.35.	1	ST			
	Unit rate in words :							
7	PS0679067043	Supply of items for yard lighting	system such as pole pipes, lamps, lamp fittings, CPVC pipes, junction boxes, cables, cable lugs, glands, related accessories, hardware as per clauses 5.36 and 5.38.	1	ST			
	Unit rate in words :							
8	PS0679067051	Supply of items of module cleaning	system such as submersible pumps (for bore wells), booster pumps, water storage tanks, CPVC pipes with fittings, ball valves, nipples, hose pipes as per clauses 5.39 and 5.40.	1	ST			
	Unit rate in words :							

9	PS0679067060	Supply of miscellaneous items	such as cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, tool kits, measuring instruments, office furniture as per clauses 5.41 to 5.49.	1	ST			
	Unit rate in words :							
10	PS0679067078	Supply of safety related items	including fire alarm system, fire extinguishers, safety gadgets as per clauses 5.50 to 5.51.	1	ST			
	Unit rate in words :							
11	PS0679067086	I&C: Temporary site office,	arranging electrical power and water for construction, construction of temporary storage yard, unloading and movement of consignments as per clauses 5.1 to 5.4	1	AU			
	Unit rate in words :							
12	PS0679067094	I&C: Interconnection of SPV modules,	cabling from strings to SMBs, installation of string monitoring boxes including cable terminations, formation of cable trenches and laying of 1CX300 sq-mm cables up to PCUs and inspection thereof as per clauses 5.5 to 5.12.	1	AU			
	Unit rate in words :							
13	PS0679067108	I&C: Erection of control room,	inverter room and security room electrical panels such as inverters, ACDB, IRDB, Security Room DB, FCBC, Battery bank, erection of cable trays and cable supports, routing and terminations of DC and AC cables up to LV side of transformers in transformer yard as per clauses 5.13 to 5.15 and 5.20 to 5.22.	1	AU			
	Unit rate in words :							
14	PS0679067116	I&C: Erection of transformer	yard equipment such as transformers, VCB panels, C&R panels, CT, PT, GOS, 2P/4P/6P structures, 33KV cable laying and terminations, foundations, Transformer yard leveling, jelly spreading, fencing including gates as per clauses 5.16, 5.17, 5.24 to 5.27.	1	AU			
	Unit rate in words :							
15	PS0679067124	I&C: Cable trenches, cable laying,	cable terminations for 33KV cables as shown in SLD between inverter room and control room and from control room up to two pole structure at plant boundary as per clauses 5.18, 5.19 and 5.25.	1	AU			
	Unit rate in words :							
16	PS0679067132	I&C: Cable trenches, cable laying,	cable terminations for control, communication and OFC cables (between IR and control room & from SMBs to SCADA panels in IR and CMCS) related to inverters, transformers, VCB Panels, C&R panels, SCADA and other equipment as per clauses 5.28 to 5.31.	1	AU			
	Unit rate in words :							

17	PS0679067140	I&C of earthing system	for solar array field, control room panels, inverter room panels and transformer yard equipment including installation of Chemical earthing electrodes, erection & electrical interconnection of earth chambers, earthing of module mounting structures, laying of copper earth strips in control room, installation of lightning arrestors (ESE) as per clauses 5.32 to 5.35.	1	AU			
	Unit rate in words :							
18	PS0679067159	I&C of yard lights	for approach road, transformer yard and boundary wall including cable trenches, cable laying and cable terminations at the yard lighting poles as well as ACDB panel in control room and IRDB panel in inverter room as per clauses 5.36 to 5.38.	1	AU			
	Unit rate in words :							
19	PS0679067167	I&C of module cleaning system	including construction of borewells, trenches for pipelines, laying of pipelines from bore wells to solar array field through water storage tanks, erection of submersible and booster pumps, ball valves, non-returnable valves as per clauses 5.39 and 5.40.	1	AU			
	Unit rate in words :							
20	PS0679067175	I&C of miscellaneous and safety items	such as WMS, cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, office furniture, fire extinguishers, fire alarm system as per clauses 5.23, 5.41 to 5.51.	1	AU			
	Unit rate in words :							
21	PS0679067183	I&C: Pre-commissioning inspections / checks / tests,	MRT tests and coordination with state and central departments such as KPTCL/CEIG/SECI etc. for necessary approvals/ clearances for commissioning, synchronization with grid and post-commissioning operation of the plant as per clause 5.52.	1	AU			
	Unit rate in words :							
22	PS0679067191	O&M for 1st year as per clause 8.0	(1 AU= 3Months)	4	AU			
	Unit rate in words :							
23	PS0679067205	O&M for 2nd year as per clause 8.0	(1 AU= 3Months)	4	AU			
	Unit rate in words :							
24	PS0679067213	O&M for 3rd year as per clause 8.0	(1 AU= 3Months)	4	AU			
	Unit rate in words :							
25	PS0679067221	O&M for 4th year as per clause 8.0	(1 AU= 3Months)	4	AU			
	Unit rate in words :							
26	PS0679067230	O&M for 5th year as per clause 8.0	(1 AU= 3Months)	4	AU			
	Unit rate in words :							

Note:

* The above format is to be used for Unpriced bid. Reproducing on letter head is acceptable.
BHEL is trying to avail Customs Duty & Excise duty exemption. Successful bidder shall support with all relevant documents.

AUTHORISED SIGNATORY WITH SEAL

SPECIAL COMMERCIAL CONDITIONS OF CONTRACT (SCC) - for indigenous vendors				
RFQ No. UPK0000980 Dtd. 04-02-2017 Due on 15-02-2017				
Sl No.	Terms	BHEL Term	Confirmation	Deviation / Remarks
1	PQC	1. Vendor should have executed atleast one contract of indoor / outdoor electrical installation of 33KV minimum in power plants or sub-stations in India with scope including both supply and erection for total value, not less than Rs. 2 crores. As evidence to this, vendor shall submit (a) certification from clients for completion of supply and erection (b) copies of Purchase orders from the clients.		Complied
		2. Vendor shall furnish solvency certificate issued by Nationalized / scheduled banks for minimum worth of Rs. 1 crore with date of issue not before three months from the tender opening date.		Complied
		3. Vendor shall be a registered company for a period not less than one year from date of tender opening. As evidence to this, vendor shall submit certificate of registration of the company.		Complied
2	Bidding	(a) Bid has to be submitted as Two Part – Techno Commercial Bid (Part-1) & Price Bid (Part-II). Bids shall be submitted through e-Procurement portal https://bheleps.buyjunction.in of M/s. Mjunction Services Limited.		Complied
		(b) SCC (Annexure B) & Annexure B1 to be submitted along with technical bid (Part-I) & Annexure B2 to be submitted along with Price bid (Part-II).		Complied
		(c) Clause-wise compliance to BHEL Purchase specification along with all documents as called in Technical specification to be submitted along with technical bid(Part-1).		Complied
3	Price Basis	Firm i.e., from the date of PO to completion of supply if I&C is not applicable. If I&C is in supplier's scope, then the prices shall remain Firm till commissioning & handing-over of the complete system. (PVC clause not acceptable).		Complied
4	Terms of Delivery	Free On Road Basis to Project site. Present Projects are : KPCL, HAVERI, KARNATAKA		Complied
5	Delivery Period	(a) Supply: 4 Wks from drawing approval Date (b) Drawing / Quality Plan Submission: 1 Wk from PO Date (c) I&C: 4 Weeks from supply	Acceptable / Not acceptable	

6	Payment Term	1) 80% of basic Supply value + 100% of taxes, duties and freight charges will be paid with 45 days credit from the receipt of material at site or 15 days credit from the date of submission of complete set of documentation whichever is later. 2) 10% of basic supply value will be paid on completion of I&C against submission of supplementary invoice along with proof of completion of I&C along with I&C charges (if any). 3) Balance 10% (retention money) against submission of supplementary invoice along with PBG valid for Warranty Period+3months Claim Period from BHEL Consortium Bank. I&C/Supervision: 100% on completion of I&C/Supervision and certification line item wise on pro-rata basis. FOR O&M: Quarterly payment of 100% O&M charges shall be done against report certified by BHEL. Note: In exceptional cases, if vendor fails to submit PBG after supplies, vendors can also accept for the final 10% payment, payable after the warranty period + 3 months of claim period against supplementary invoice subject to the completion of commissioning (if applicable) as PBG is linked to Warranty period.	Acceptable / Not acceptable	
		(b) For any deviation in payment term, the offer will be liable for loading as per Clause G of ITB.	Acceptable / Not acceptable	
7	Excise Duty	(a) To confirm whether applicable. If applicable, indicate prevailing rate of Excise duty.	Applicable / Not applicable	Prevailing rate of Excise duty: %
8	Sales Tax	(a) To confirm whether applicable. If applicable, indicate prevailing rate of Sales Tax without Form C.	Applicable / Not applicable	Prevailing rate of Sales Tax without Form C: %
9	Value Added Tax	Both are in the same State, VAT is applicable please indicate VAT applicable.	Applicable / Not applicable	Prevailing rate of VAT: %
10	Service Tax	To confirm whether applicable, if applicable indicate current rate of Service Tax.	Applicable / Not applicable	Prevailing rate of Service Tax: _____%
		Furnish Service Tax Regn. No. Confirmation that Service Tax register is maintained.		Service Tax Regn. No. S.Tax Register maintained : Yes/No
11	Evaluation of L1 vendor	Over all L1 for "Supply+I&C+O&M" on "FOR" basis to site will only be considered.	Complied	
12	Warranty	(a) Warranty for Supply: 18 Months from Supply or 12 Months from I&C, whichever is earlier. (b) Warranty for Workmanship & I&C: 12 months from I&C (c) O&M: 5 Years from date of commissioning	Acceptable / Not acceptable	
13	Pre Shipment Inspection	(a) Pre Shipment Inspection will be carried out by BHEL/Customer for which test report shall be sent atleast one week in advance.	Acceptable / Not acceptable	
14	Penalty	(a) Supply: Penalty of 0.5% per week at the basic price of the good for undelivered quantity of supply portion, subject to a maximum of 10%. For Supply, Pre Shipment Inspection Call Letter Date (Receipt of test report) will be treated as delivery for purpose of penalty.	Acceptable / Not acceptable	
		(b) For any deviation in penalty term, the offer will be liable for loading as per Clause No. G, Point No.(b) of ITB.	Acceptable / Not acceptable	

15	Road Permit	Road permit if applicable will be given by BHEL before Dispatch of ordered Items.However, vendor shall give request for road permit 24 hours in advance.	Complied	
16	PBG	(a) PBG shall be furnished in the BHEL prescribed format. (b) Deviation if any Please specify.	Acceptable / Not acceptable	
17	Despatch Documents	Complete set of despatch documents in 3 sets shall be forwarded to BHEL directly. Despatch documents include Commercial Invoice, Excise Invoice (if ED is applicable), Lorry receipt (L/R), Packing list, PSI letter Copy, Proof of delivery such as MRC (Material Receipt Certificate)/ original acknowledged LR, Insurance intimation letter and Warranty certificate. One set of Invoice, Packing list and L/R shall be emailed immediately after despatch to BHEL-EDN, Bangalore.	Complied	
18	Reverse Auction	BHEL reserves the right to conduct Reverse auction.Procedure for the same will be informed by BHEL .	Acceptable / Not acceptable	
19	Other terms & conditions	For any other Terms and Conditions, kindly refer to the following: A: ITB (document ref :SCPV: BOS: ITB - Rev 01) B: GCC (document ref: SCPV: BOS: GCC - Rev 01)	Acceptable / Not acceptable	
20	Validity	Quotation should remain valid for a period of 90 days from the due date.	Acceptable / Not acceptable	
21	Shipment	Kindly indicate the state from where the shipment will take place.	State/Place	
22	Documents Submission	All the documents pertaining to I&C and O&M as per Annexure-C to be submitted as applicable.	Acceptable/ Not acceptable	
23	BOS %	The percentage of Supply and I&C and O&M values shall be in the range indicated below (approximately, with overall tallying to 100%) : (a) Supply : 34 to 38 % (b) I&C : 25 to 29 % (c) O&M : 35 to 39 % Successful bidder shall submit detailed billing break up for BHEL approval after placement of Purchase order.	Acceptable/ Not acceptable	
24	Octroi / Entry Tax	Octroi/ Entry tax if applicable for supply of material at this project location shall be in scope of vendor.	Acceptable/ Not acceptable	

AUTHORISED SIGNATORY WITH SEAL

TECHNICAL BID ENCLOSURE FOR COMPLIANCE OF QUOTE : UNPRICED BID (Indigenous Vendors)
RFQ No. UPK0000980 Dtd. 04-02-2017 Due on 15-02-2017

Sl. No.	Material Code	DESCRIPTION	ADDITIONAL DESCRIPTION	QTY	UNIT	QUOTED	TAXES				Remarks
							ED %	CST %	VAT %	S. TAX%	
1	PS0679066985	Supply of MC4 connectors, cable ties,	SMB mounting structure, HDPE pipes, cable lugs, hardware, cable trays, cable tray supports as per clauses 5.5 to 5.15.	1	ST	YES/NO	NA			NA	Taxes Included
2	PS0679066993	Supply of Auxiliary power cables,	control cables, data communication cables, 33KV termination kits, lugs and glands as per clauses 5.18, 5.19, 5.25, 5.30 to 5.31.	1	ST	YES/NO	NA			NA	Taxes Included
3	PS0679067000	Supply of switchyard equipment	such as auxiliary transformer, 33KV lightning arresters, metering CTs, metering PTs, metering panels with ABT meters, GOS isolators, PSC poles, insulators, ACSR conductor required for four pole and two pole structures, items of switch yard fencing (fence, gate, angles), items for connecting to earthing, with all related miscellaneous accessories and hardware as per clauses 5.17, 5.24 and 5.26.	1	ST	YES/NO	NA			NA	Taxes Included
4	PS0679067019	Supply of ACDB, IRDB, Battery banks,	FCBC, UPS with battery, Weather Monitoring System as per the clauses 5.20 to 5.23.	1	ST	YES/NO	NA			NA	Taxes Included
5	PS0679067027	Supply of items of earthing system	for solar array field, control room, inverter room panels and switch yard equipment including Earthing electrodes, GI flats, copper strips, copper earthing cables (green) of min 25sq mm, CPVC pipes, Insulation bushes, heat shrinkable sleeves for control room copper strip earthing and all related miscellaneous hardware as per clauses 5.32 to 5.34.	1	ST	YES/NO	NA			NA	Taxes Included
6	PS0679067035	Supply of lightning arrestors	for solar array field (ESE type) with earthing items as per clause 5.35.	1	ST	YES/NO	NA			NA	Taxes Included
7	PS0679067043	Supply of items for yard lighting	system such as pole pipes, lamps, lamp fittings, CPVC pipes, junction boxes, cables, cable lugs, glands, related accessories, hardware as per clauses 5.36 and 5.38.	1	ST	YES/NO	NA			NA	Taxes Included
8	PS0679067051	Supply of items of module cleaning	system such as submersible pumps (for bore wells), booster pumps, water storage tanks, CPVC pipes with fittings, ball valves, nipples, hose pipes as per clauses 5.39 and 5.40.	1	ST	YES/NO	NA			NA	Taxes Included
9	PS0679067060	Supply of miscellaneous items	such as cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, tool kits, measuring instruments, office furniture as per clauses 5.41 to 5.49.	1	ST	YES/NO	NA			NA	Taxes Included
10	PS0679067078	Supply of safety related items	including fire alarm system, fire extinguishers, safety gadgets as per clauses 5.50 to 5.51.	1	ST	YES/NO	NA			NA	Taxes Included
11	PS0679067086	I&C: Temporary site office,	arranging electrical power and water for construction, construction of temporary storage yard, unloading and movement of consignments as per clauses 5.1 to 5.4	1	AU	YES/NO	NA	NA	NA		Taxes Included
12	PS0679067094	I&C: Interconnection of SPV modules,	cabling from strings to SMBs, installation of string monitoring boxes including cable terminations, formation of cable trenches and laying of 1CX300 sq-mm cables up to PCUs and inspection thereof as per clauses 5.5 to 5.12.	1	AU	YES/NO	NA	NA	NA		Taxes Included

[illegible]

Note:

1. The quoted prices shall be on "FOR" basis to project site: **KPCL, HAVERI, KARNATAKA**
2. The quoted prices shall be inclusive of all Taxes & Duties, Packing & Forwarding charges and Freight.
3. However, the percentage of taxes considered against each item shall be indicated in the column for Taxes for the purpose of availing Tax Credit.
4. **ED shall not be considered as the project is under MNRE approval. Hence all inclusive rate for Supply is to be quoted without ED for Supply. However, the prevailing rate of ED shall be indicated in SCC (Annexure B). In case any item is rejected by MNRE, ED shall be reimbursed for that item at actuals.
5. The above format only shall be used for compliance. (reproducing on your letter head is acceptable).
6. Insurance will be in BHEL scope.

AUTHORISED SIGNATORY WITH SEAL

TECHNICAL BID ENCLOSURE FOR COMPLIANCE OF QUOTE : UNPRICED BID (Indigenous Vendors)												
RFQ No. UPK0000980 Dtd. 04-02-2017 Due on 15-02-2017												
Sl. No.	Material Code	DESCRIPTION	ADDITIONAL DESCRIPTION	QTY	UNIT	Unit Rate (Rs.)	Total Value (Rs.) (Rate X Qty)	TAXES				Remarks
								ED %	CST %	VAT %	S. TAX%	
1	PS0679066985	Supply of MC4 connectors, cable ties,	SMB mounting structure, HDPE pipes, cable lugs, hardware, cable trays, cable tray supports as per clauses 5.5 to 5.15.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
2	PS0679066993	Supply of Auxiliary power cables,	control cables, data communication cables, 33KV termination kits, lugs and glands as per clauses 5.18, 5.19, 5.25, 5.30 to 5.31.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
3	PS0679067000	Supply of switchyard equipment	such as auxiliary transformer, 33KV lightning arresters, metering CTs, metering PTs, metering panels with ABT meters, GOS isolators, PSC poles, insulators, ACSR conductor required for four pole and two pole structures, items of switch yard fencing (fence, gate, angles), items for connecting to earthing, with all related miscellaneous accessories and hardware as per clauses 5.17, 5.24 and 5.26.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
4	PS0679067019	Supply of ACDB, IRDB, Battery banks,	FCBC, UPS with battery, Weather Monitoring System as per the clauses 5.20 to 5.23.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
5	PS0679067027	Supply of items of earthing system	for solar array field, control room, inverter room panels and switch yard equipment including Earthing electrodes, GI flats, copper strips, copper earthing cables (green) of min 25sq mm, CPVC pipes, Insulation bushes, heat shrinkable sleeves for control room copper strip earthing and all related miscellaneous hardware as per clauses 5.32 to 5.34.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
6	PS0679067035	Supply of lightning arrestors	for solar array field (ESE type) with earthing items as per clause 5.35.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
7	PS0679067043	Supply of items for yard lighting	system such as pole pipes, lamps, lamp fittings, CPVC pipes, junction boxes, cables, cable lugs, glands, related accessories, hardware as per clauses 5.36 and 5.38.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
8	PS0679067051	Supply of items of module cleaning	system such as submersible pumps (for bore wells), booster pumps, water storage tanks, CPVC pipes with fittings, ball valves, nipples, hose pipes as per clauses 5.39 and 5.40.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
9	PS0679067060	Supply of miscellaneous items	such as cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, tool kits, measuring instruments, office furniture as per clauses 5.41 to 5.49.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
10	PS0679067078	Supply of safety related items	including fire alarm system, fire extinguishers, safety gadgets as per clauses 5.50 to 5.51.	1	ST			NA			NA	Taxes Included
	Unit rate in words :											
11	PS0679067086	I&C: Temporary site office,	arranging electrical power and water for construction, construction of temporary storage yard, unloading and movement of consignments as per clauses 5.1 to 5.4	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
12	PS0679067094	I&C: Interconnection of SPV modules,	cabling from strings to SMBs, installation of string monitoring boxes including cable terminations, formation of cable trenches and laying of 1CX300 sq-mm cables up to PCUs and inspection thereof as per clauses 5.5 to 5.12.	1	AU			NA	NA	NA		Taxes Included

	Unit rate in words :											
13	PS0679067108	I&C: Erection of control room,	inverter room and security room electrical panels such as inverters, ACDB, IRDB, Security Room DB, FCBC, Battery bank, erection of cable trays and cable supports, routing and terminations of DC and AC cables up to LV side of transformers in transformer yard as per clauses 5.13 to 5.15 and 5.20 to 5.22.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
14	PS0679067116	I&C: Erection of transformer	yard equipment such as transformers, VCB panels, C&R panels, CT, PT, GOS, 2P/4P/6P structures, 33KV cable laying and terminations, foundations, Transformer yard leveling, jelly spreading, fencing including gates as per clauses 5.16, 5.17, 5.24 to 5.27.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
15	PS0679067124	I&C: Cable trenches, cable laying,	cable terminations for 33KV cables as shown in SLD between inverter room and control room and from control room up to two pole structure at plant boundary as per clauses 5.18, 5.19 and 5.25.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
16	PS0679067132	I&C: Cable trenches, cable laying,	cable terminations for control, communication and OFC cables (between IR and control room & from SMBs to SCADA panels in IR and CMCS) related to inverters, transformers, VCB Panels, C&R panels, SCADA and other equipment as per clauses 5.28 to 5.31.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
17	PS0679067140	I&C of earthing system	for solar array field, control room panels, inverter room panels and transformer yard equipment including installation of Chemical earthing electrodes, erection & electrical interconnection of earth chambers, earthing of module mounting structures, laying of copper earth strips in control room, installation of lightning arrestors (ESE) as per clauses 5.32 to 5.35.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
18	PS0679067159	I&C of yard lights	for approach road, transformer yard and boundary wall including cable trenches, cable laying and cable terminations at the yard lighting poles as well as ACDB panel in control room and IRDB panel in inverter room as per clauses 5.36 to 5.38.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
19	PS0679067167	I&C of module cleaning system	including construction of borewells, trenches for pipelines, laying of pipelines from bore wells to solar array field through water storage tanks, erection of submersible and booster pumps, ball valves, non-returnable valves as per clauses 5.39 and 5.40.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
20	PS0679067175	I&C of miscellaneous and safety items	such as WMS, cable tags, danger boards, cable markers, hoarding board, sign boards, display boards, electrical insulation mat, checkered plates, air conditioners, office furniture, fire extinguishers, fire alarm system as per clauses 5.23, 5.41 to 5.51.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
21	PS0679067183	I&C: Pre-commissioning inspections / checks / tests,	MRT tests and coordination with state and central departments such as KPTCL/CEIG/SECI etc. for necessary approvals/ clearances for commissioning, synchronization with grid and post-commissioning operation of the plant as per clause 5.52.	1	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
22	PS0679067191	O&M for 1st year as per clause 8.0	(1 AU= 3Months)	4	AU			NA	NA	NA		Taxes Included
	Unit rate in words :											
23	PS0679067205	O&M for 2nd year as per clause 8.0	(1 AU= 3Months)	4	AU			NA	NA	NA		Taxes Included

	Unit rate in words :										
24	PS0679067213	O&M for 3rd year as per clause 8.0	(1 AU= 3Months)	4	AU			NA	NA	NA	Taxes Included
	Unit rate in words :										
25	PS0679067221	O&M for 4th year as per clause 8.0	(1 AU= 3Months)	4	AU			NA	NA	NA	Taxes Included
	Unit rate in words :										
26	PS0679067230	O&M for 5th year as per clause 8.0	(1 AU= 3Months)	4	AU			NA	NA	NA	Taxes Included
	Unit rate in words :										
27	Freight Charge including Service Tax on Freight : Included in Quoted rates										

Note:

1. The quoted prices shall be on "FOR" basis to project site: **KPCL, HAVERI, KARNATAKA**
2. The quoted prices shall be inclusive of all Taxes & Duties, Packing & Forwarding charges and Freight.
3. However, the percentage of taxes considered against each item shall be indicated in the column for Taxes for the purpose of availing Tax Credit.
4. **ED shall not be considered as the project is under MNRE approval. Hence all inclusive rate for Supply is to be quoted without ED for Supply. However, the prevailing rate of ED shall be indicated in SCC (Annexure B). In case any item is rejected by MNRE, ED shall be reimbursed for that item at actuals.
5. The above format only shall be used for compliance. (reproducing on your letter head is acceptable).
6. Insurance will be in BHEL scope.

AUTHORISED SIGNATORY WITH SEAL

ANNEXURE - C

List of Documents to be submitted by Vendors/Subcontractors for SPV Contracts.		Confirmation on submission	Deviation / Remarks
IR Documents (Type - A): For all Civil & I&C & O&M			
Sl No.	Documents		
1	Wage Sheet (Form 17)	YES / NO	
2	Attendance Register (w.r.t Sl No.1)	YES / NO	
3	Workman Policy & Additional Insurance (Automotive Liability, Group Servis Insuarncce Policy e	YES / NO	
4	PF Challan	YES / NO	
5	ESI (Employee State Insurance)	YES / NO	
6	ECR (Electronic Challan Receipt)	YES / NO	
7	Bank Statement for PF deposit	YES / NO	
8	RCS (Remittance Confirmation Slip)	YES / NO	
Quality Documents (Type - B): For all MMS Civil Works			
Sl No.	Documents		
1	FQA (Field Quality Assuarance)	NA	
2	Field Content, Slump Test	NA	
3	Gradation of Aggregate (10mm, 20mm)	NA	
4	Fine Aggregate Test (for Sand)	NA	
5	Cube Test Registered	NA	
6	Material Test Certificate for Steel & Cement	NA	
7	Consumption Register for Steel & Invoice	NA	
8	Pour Card for Concreting purpose	NA	
9	Royalty Reports (10mm, 20mm, Sand)	NA	
10	Sand Soundess Test Reports	NA	
11	Slump Test Register	NA	
12	Sieve Analysis, Flakiness Index, Elongation Index - Register to be maintained	NA	
13	Moisture Content Coarse and Fine Aggregate - Register to be maintained	NA	
14	Water Test Report for Concrete	NA	
15	Design Mix Report for Concrete	NA	
Quality Documents (Type - B): For all Civil related Works			
Sl No.	Documents		
1	FQA (Field Quality Assuarance)	YES / NO	
2	Field Content, Slump Test	YES / NO	
3	Gradation of Aggregate (10mm, 20mm)	YES / NO	
4	Fine Aggregate Test (for Sand)	YES / NO	
5	Cube Test Registered	YES / NO	
6	Material Test Certificate for Steel & Cement	YES / NO	
7	Consumption Register for Steel & Invoice	YES / NO	
8	Pour Card for Concreting purpose	YES / NO	
9	Royalty Reports (10mm, 20mm, Sand)	YES / NO	
10	Sand Soundess Test Reports	YES / NO	
11	Warpage of Bricks Test Reports	YES / NO	
12	Core Cutting (Compaction Test) - Roads & Pathways	YES / NO	
13	Slump Test Register	YES / NO	
14	Sieve Analysis, Flakiness Index, Elongation Index - Register to be maintained	YES / NO	
15	Moisture Content Coarse and Fine Aggregate - Register to be maintained*	YES / NO	
16	Brick Test Reports	YES / NO	
17	Plastering profile and thickness	YES / NO	
18	Compaction test beneath floor of all buildings. - Reports	YES / NO	
19	Test Certificates for Paint, Glan, Glazing, etc.	YES / NO	
20	Test Certificates Aluminium Section for doors and windows (Anodisation Certificates also)	YES / NO	
21	BBS for Buildings	YES / NO	
22	Water Test Report for Concrete	YES / NO	
23	Design Mix Report for Concrete	YES / NO	
Quality Documents: for Electrical & Mechanical Installation Works (BOS)			
Sl No.	Documents		
1	FQA (Field Quality Assuarance)	YES / NO	
2	Inspection Reports	YES / NO	
3	Guarantee Certificates	YES / NO	
4	Factory Acceptance Test Reports	YES / NO	
5	Commissioning Reports	YES / NO	

NOTE:

* This list of documents is indicative and intended towards all Solar Projects.

* Apart from the above, any other document required by the Customer and which are mandatory for Billing by BHEL to the Customer, the same needs to be provided by the respective vendors.



ಭಾರತ್ ಹೆವಿ ಎಲೆಕ್ಟ್ರಿಕಲ್ಸ್ ಲಿಮಿಟೆಡ್
भारत हेवी इलेक्ट्रिकल्स लिमिटेड

Bharat Heavy Electricals Ltd.,
(A Government of India undertaking)
Electronics Division

PB 2606 , Mysore Road Bangalore , 560026 INDIA

SCPV: BOS: ITB - Rev 01

INSTRUCTIONS TO BIDDERS (ITB)

Bidders are requested to read the instructions carefully and submit their quotations covering all the points:

A. GENERAL INSTRUCTIONS:

1. Any Purchase Order resulting from this enquiry shall be governed by the Instructions to Bidders (document reference: SCPV: BOS: ITB – Rev 01), General Conditions of Contract (document reference: SCPV: BOS: GCC - Rev 01) and Special Conditions of Contract (document reference: SCPV: BOS: SCC: I - Rev 01/ SCPV: BOS: SCC: F - Rev 01), if any, of the enquiry.
2. Any deviations from or additions to the “General Conditions of Contract” or “Special Conditions of Contract” require BHEL’s express written consent. The general terms of business or sale of the bidder shall not apply to this tender.
3. Bidders (also includes the term suppliers / contractors wherever used in this document) are instructed to quote their most competitive price and best delivery, etc. in the offer. Prices should be indicated in both figures & words. **(Please also refer clause 11 under section B)**
4. Regret letter (either through post or by mail) indicating reasons for not quoting must be submitted without fail, in case of non-participation in this tender. If a bidder fails to respond against 3 consecutive tenders for the same item, he will be liable for removal as a registered vendor of BHEL.
5. Procurement directly from the manufacturers shall be preferred. However, if the OEM / Principal insist on engaging the services of an agent, such agent shall not be allowed to represent more than one manufacturer / supplier in the same tender. Moreover, either the agent could bid on behalf of the manufacturer / supplier or the manufacturer / supplier could bid directly but not both. In case bids are received from the manufacturer / supplier and his agent, bid received from the agent shall be ignored.
6. Consultant / firm (and any of its affiliates) shall not be eligible to participate in the tender/s for the related goods for the same project if they were engaged for consultancy services for the same project.
7. If an Indian representative / associate / liaison office quotes on behalf of a foreign based bidder, such representative shall furnish compulsorily the following documents:
 - a. Authorization letter to quote and negotiate on behalf of such foreign-based bidder.
 - b. Undertaking from such foreign based bidder that such contract will be honored and executed according to agreed scope of supply and commercial terms and conditions.
 - c. Undertaking shall be furnished by the Indian representative stating that the co-ordination and smooth execution of the contract and settlement of shortages / damages / replacement / repair of imported scope till system is commissioned and handed over to customer will be the sole responsibility of the Indian representative / associates / agent / liaison office.
8. In case of imported scope of supply, customs clearance & customs duty payment will be to BHEL account after the consignment is received at Indian Airport / Seaport. Bidders must provide all original documents required for completing the customs clearance along with the shipment. Warehousing charges due to incomplete or missing documentation will be recovered from the supplier’s bill. All offers for imported scope of supply must be made from any of the gateway ports (within the country) indicated. **(Refer Annexure I)**
9. The offers of the bidders who are on the banned list and also the offers of the bidders, who engage the services of the banned firms, shall be rejected. The list of the banned firms is available on BHEL website: **www.bhel.com**.

10. Business dealings with bidders will be suspended if they are found to have indulged in any malpractices / misconduct which are contrary to business ethics like bribery, corruption, fraud, pilferage, cartel formation, submission of fake/false/forged documents, poor quality, certificates, information to BHEL or if they tamper with tendering procedure affecting the ordering process or fail to execute a contract, or rejection of 3 consecutive supplies or if their firms / works are under strike / lockout for a long period.

B. GUIDELINES FOR PREPARATION OF OFFER:

1. Quotation shall be submitted in Single Part Bid, Two Part Bid or Three Part Bid, as called for in the tender:
 - **SINGLE PART BID:** Technical and Commercial Bid with prices along with price summary & filled in BHEL Standard Commercial terms and conditions in a single sealed envelope.
 - **TWO PART BID:** Unpriced offer i.e. "Techno-commercial Bid" with filled in BHEL Standard Commercial terms and conditions in a sealed envelope **along with the copy of the "Price Bid" without the prices** should be enclosed in one cover and the cover must be super scribed "**Techno-commercial offer** and Priced offer i.e. "Price Bid" containing price summary in a separate sealed envelope and must be super scribed "**Price Bid**". Both these envelopes shall be enclosed in a single sealed envelope super scribed with enquiry number, due date of tender and any other details as called for in the tender document.
 - **THREE PART BID:** Pre-qualification Bid (Part-I), Techno Commercial Bid with filled in BHEL Standard Commercial terms and conditions (Part-II), and Price Bid (Part-III). All three envelopes shall be enclosed in a single sealed envelope super scribed with enquiry number due date of tender and any other details as called for in the tender document.

If any of the offers (Part I, Part II or Part III) are not submitted before the due date and time of submission at the venue/place specified or if any part of the offer is incomplete the entire offer of the bidder is liable for rejection.

2. Supplier shall ensure to super scribe each envelope with RFQ number, RFQ Date, RFQ Due date and time, Item Description and Project clearly & boldly. Also mention on the envelope whether it is "Techno Commercial Bid" or "Price Bid" or "Pre-Qualification Bid". Please ensure complete address, department name and purchase executive name is mentioned on the envelope (before dropping in the tender box or handing over) so that the tender is available in time for bid opening.
3. BHEL standard Commercial Terms and Conditions shall be duly filled, signed & stamped and must accompany Technical-Commercial offer without fail and should be submitted in original only. Photocopy will not be accepted. All documents submitted along with the offer shall be signed and stamped in each page by authorized representative of the bidder.
4. Any of the terms and conditions not acceptable to supplier, shall be explicitly mentioned in the Techno-Commercial Bid. If no deviations are brought out in the offer it will be treated as if all terms and conditions of this enquiry are accepted by the supplier without any deviation.
5. Deviation to this specification / item description, if any, shall be brought out clearly indicating "DEVIATION TO BHEL SPECIFICATION" without fail, as a part of Techno-Commercial Bid. If no deviations are brought out in the offer it will be treated as if the entire specification of this enquiry is accepted without deviation.
6. Suppliers shall submit one set of original catalogue, datasheets, bill of materials, dimensional drawings, mounting details and / or any other relevant documents called in purchase specification as part of Technical Bid.
7. "Price Bid" shall be complete in all respects containing price break-up of all components along with all applicable taxes and duties, packing & forwarding charges (if applicable), freight charges (if applicable) etc. Once submitted no modification / addition / deletion will be allowed in the "Price Bid." Bidders are advised to thoroughly check the unit price, total price to avoid any discrepancy.
8. In addition, bidder shall also quote for erection & commissioning charges (I&C charges), documentation charges, service charges, testing charges (type & routine), training charges, service tax, etc. wherever applicable. The price summary must indicate all the elements clearly.
9. Vendors should indicate "lump sum" charges (including To & Fro Fare, Boarding, Lodging, Local Conveyance etc.) for Supervision of Erection, Commissioning and handing over to customer. The quotation shall clearly indicate scope of work, likely duration of commissioning, pre-commissioning checklist and service tax (if any).
10. Wherever bidders require PAC (Project Authority Certificate) for import of raw materials, components required for Mega

Power Projects, Export Projects, MNRE Concession or other similar projects wherein supplies are eligible for customs duty /Excise duty benefits, lists and quantities of such items and their values (CIF) has to be mentioned in the offer. Prices must be quoted taking into account of such benefits.

11. All quotations shall be free from corrections /overwriting. Corrections if any should be authenticated with signature and seal. Any typographical error, totaling mistakes, currency mistake, multiplication mistake, summing mistakes etc. observed in the price bids will be evaluated as per **Annexure VI** "Guidelines for dealing with Discrepancy in Words & Figures – quoted in price bid". BHEL decision will be final.

C. GUIDELINES FOR OFFER SUBMISSION:

1. Offers / Quotations must be dropped in tender box before 13.00 Hrs. on or before due date mentioned in RFQ. The offers are to be dropped in the proper slot of the Tender Box kept in our reception area with caption "CE, SC&PV, DEFENCE." Tenders are opened on 3 days in a week (Monday/Wednesday/Friday). Tender must be deposited in the slot corresponding to the day (Monday - Box no.4/Wednesday - Box no. 6 /Friday - Box no.8) while depositing the offer. **(This clause will not be applicable for e-tenders).**
2. E-Mail / Internet / EDI offers received in time shall be considered only when such offers are complete in all respects. In case of offers received through E-mail, please send the offer to the email IDs within time of submission of tender.
3. In cases where tender documents are bulky, or due to some reasons tender documents are required to be submitted by hand or through posts/couriers, the offers are to be handed over to purchase officers.
4. Tenders will be opened on due date, time and venue as indicated in the RFQ in the presence of bidders at the venue indicated in the RFQ. In case of e-procurement, bidders can see tender results till seven days after due date and time.
5. Vendor will be solely responsible:
 - a. For submission of offers before due date and time. Offers submitted after due date and time will be treated as "Late offers" and will be rejected.
 - b. For submission of offers in the correct compartment of the tender box based on the day of due date (Monday/Wednesday/Friday). Please check before dropping your offer in the correct tender box.
 - c. For depositing offers in proper sealed condition in the tender box. If the bidder drops the tender in the wrong tender box or if the tender document is handed over to the wrong person BHEL will not be responsible for any such delays.
 - d. For offers received through email/courier etc., suppliers are fully responsible for lack of secrecy on information and ensuring timely receipt of such offers in the tender box before due date & time.
 - e. In case of e-tender, all required documents should be uploaded before due date and time. Availability of power, internet connections, etc. will be the sole responsibility of the vendor. Wherever assistance is needed for submission of e-tenders, help line numbers and executives of service provider of BHEL may be contacted.
Service provider: M-junction
Website address: <https://bheleps.buyjunction.in/>
Helpline no.: 033-66106426/6217/6013/6046/6176 (9:30 am to 5:30 pm)
9163348283/9163348284/9163348285/9163348286/8584008116 (5:30 pm to 8:30 pm)

Purchase Executive / BHEL will not be responsible for any of the activities relating to submission of offer.

D. PROCESSING OFFERS RECEIVED:

1. Any discount / revised offer submitted by the supplier on its own shall be accepted provided it is received on or before the due date and time of offer submission (i.e. Part-I bid). The discount shall be applied on pro-rata basis to all items unless specified otherwise by the bidder.
2. Changes in offers or Revised offers given after Part-I bid opening shall not be considered as a part of the original offer unless such changes / revisions are requested by BHEL.
3. In case there is no change in the technical scope and / or specifications and / or commercial terms & conditions by BHEL, the supplier will not be allowed to change any of their bids after Technical bids are opened (after the due date and time of tender opening of Part-1 Bid).

4. In case of changes in scope and/ or technical specifications and/ or commercial terms & conditions by BHEL and it accounts for price implications from vendors, all techno-commercially acceptable bidders shall be asked by BHEL (after freezing the scope, technical specifications and commercial terms & conditions) to submit the impact of such changes on their price bid. Impact price will be applicable only for changes in technical specification / commercial conditions by BHEL. The impact price must be submitted on or before the cut-off date specified by BHEL and the original price bid and the price impact bid will be opened together at the time of price bid opening. Impact price means only for those items which have been impacted by addition / deletion / changes in the technical specifications or commercial conditions. The impact may be +/- incremental value of the currency in which originally quoted. The impact price bid to be submitted on the cut-off date, time & venue as specified by BHEL. The impact price bid shall be opened along with original price bid.
5. Un-opened bids (including price bids) will be returned to the respective bidders after release of PO and receipt of order acknowledgement from the successful bidder.
6. After receipt of Purchase Order, supplier should submit required documents like drawings, bill of materials, datasheets, catalogues, quality plan, test procedure, type test report , O & M Manuals and / or any other relevant documents as per Specification / Purchase Order, as and when required by BHEL / Customer.
7. Any deviation to the terms and conditions not mentioned in the quotation by supplier in response to this enquiry will not be considered, if put forth subsequently or after issue of Purchase Order, unless clarification is sought for by BHEL EDN and agreed upon in the Purchase Order.
8. Evaluation shall be on the basis of delivered cost (i.e. "Total Cost to BHEL"). As per RFQ terms.
"Total Cost to BHEL" shall include total basic cost, packing & forwarding charges, taxes and duties, inspection charges, freight charges, test charges, insurance, service tax for services, any other cost indicated by vendor for execution of the contract and loading factors (for non-compliance to BHEL Standard Commercial Terms & Conditions). Benefits arising out of Nil Import Duty on Mega Projects, Physical Imports or such 100% exemptions & MNRE Exemptions (statutory benefits), customer reimbursements of statutory duties (like Excise Duty, CST, VAT) will also be taken into account at the time of tender evaluation. (Wherever applicable and as indicated in SCC document of tender)
9. For evaluation of offers in foreign currency, the exchange rate (TT selling rate of SBI) shall be taken as under:

Single part bids:	Date of tender opening
Two/three part bids:	Date of Part-I bid opening
Reverse Auction:	Date of Part-I bid opening

In case of Performance Bank Guarantee (PBG) also, exchange rate will be considered as mentioned above for converting foreign currency to Indian currency and vice versa.

If the relevant day happens to be a bank holiday, then the exchange rate as on the previous working day of the bank (SBI) shall be taken.
10. Ranking (L-1, L-2 etc.) shall be done only for the techno-commercially acceptable offers and on the basis or evaluation of Total Cost to BHEL.

E. INFORMATION ON PAYMENT TERMS:

1. All payments will be through Electronic Fund transfer (EFT). Vendor has to furnish necessary details as per BHEL standard format (**Refer Annexure IV**) for receiving all payments through NEFT. (Applicable for Indian vendors only)
2. Statutory deductions, if any, will be made and the deduction certificate shall be issued. In case vendor does not provide PAN details, the TDS deduction shall be at the maximum percentage stipulated as per the provisions of Income Tax Act. (Applicable for Indian vendors only). Foreign vendors shall submit relevant details of their bankers like Swift Code, Banker's Name & Address etc.
3. Vendors must submit bills & invoices along with required supporting documents in time. Incomplete documentation / delayed submission of invoice / documents will result in corresponding delay in payment.

F. STANDARD PAYMENT TERMS OF BHEL-EDN**Purchase Orders for indigenous procurement****(a) SUPPLY WITH I&C/SUPERVISION:****Supply:**

- 1) 80% of basic Supply value + 100% of taxes, duties and freight charges will be paid with 45 days credit from the receipt of material at site or 15 days credit from the date of submission of complete set of documentation whichever is later.
- 2) 10% of basic supply value will be paid on completion of I&C against submission of supplementary invoice along with proof of completion of I&C along with I&C charges (if any).
- 3) Balance 10% (retention money) against submission of supplementary invoice along with PBG valid for Warranty Period+3 months Claim Period from BHEL Consortium Bank.

I&C/Supervision: 100% on completion of I&C/Supervision and certification line item wise on pro-rata basis.

O&M: 100% O&M charges are payable as per RFQ terms against report certified by BHEL.

(b) SUPPLY ONLY:

- 1) 100% of Basic value with taxes, duties and freight will be paid with 45 days credit from the receipt of material at site or 15 days credit from the date of submission of complete set of documentation whichever is later)+ submission of PBG valid for Warranty Period+ 3 months Claim Period from BHEL Consortium Bank ,if applicable.

Purchase orders for import procurement:**(c) SUPPLY WITH I&C/SUPERVISION:****Supply:**

- 1) 80% of the basic value (excluding I&C charges) will be paid with 45 days credit, against Sight draft, from the date of AWB/BOL on submission of complete set of documents as in PO.
- 2) 10% of basic supply value will be paid on completion of I&C against submission of supplementary invoice along with proof of completion of I&C along with I&C charges (if any).
- 3) Balance 10% (retention money) against submission of supplementary invoice along with PBG valid for Warranty Period+3 months Claim Period from BHEL Consortium Bank.

I&C: 100% on completion of I&C/Supervision and certification line item wise on pro-rata basis.

(d) SUPPLY ONLY:

- 1) 100% of PO value will be paid against Sight draft with 45 days Credit from the date of dispatch or 15 days credit from the date of submission of complete set of documents whichever is later)+ submission of PBG valid for Warranty Period+3 months Claim Period from BHEL Consortium Bank ,if applicable.

Note for (a), (b), (c) and (d): In exceptional cases, if vendor fails to submit PBG after supplies, vendors can also accept for the final 10% payment, payable after the warranty period + 3 months of claim period against supplementary invoice subject to the completion of commissioning (if applicable) as PBG is linked to Warranty period.

G. LOADING FACTORS FOR PAYMENT TERMS & DELAYED DELIVERY:

Loading factors as detailed below will be added to the quoted price (basic) to evaluate the lowest quote for non-compliance of BHEL standard commercial term.

SI No	Deviation on	Nature of Deviation / Offered Terms	Loading %
1.	Payment Terms	For Purchase within India :-	
		1) Credit period less than 45 days	15
		* For Foreign Purchase :-	
		1) Payment through At Sight Letter of Credit	10
		2) Payment through Letter of Credit with usance credit of 45 days	5
		3) Sight Draft with credit period less than 45 days	5
2.	Penalty for Delayed Delivery	1) Non – Acceptance	10
		2) Partial Acceptance (X%)	(10 – X)

*** All bank charges shall be to seller's account. If bank charges of BHEL banker are to BHEL's account then additional loading of 2% on the quoted basic value is applicable.**

Offer/s with payment terms other than the standard payment terms indicated at Clause No.F or Deviated Payment Terms with loading indicated at Clause No.G above are liable for rejection.

NOTES:

1. ADVANCE PAYMENT/LC: Quotations with "Advance payment/Inland LC" shall be rejected.
2. Basic value of Purchase Order mentioned above will include all components of the purchase order and will exclude only taxes, duties, freight and I&C charges (wherever applicable).
3. Wherever the Purchase Order is split into import portion and indigenous portion of supply the retention money will be 10% (as applicable) of both purchase order values put together.
4. Non-Compliance of Warranty terms. Offers not complying with Warranty terms as per RFQ Terms is liable for rejection.
5. SALE IN TRANSIT/ LOCAL VAT: Sale in transit under section 6(2) of CST is allowed if movement of goods is interstate. In case intra state movement of goods, benefit of sale in transit is not available.
6. In case of intrastate movement i.e. supply within same state and VAT is applicable, the vendor shall furnish the respective BHEL's nodal agency TIN no. and address in their invoice. (Refer **Annexure IX**)

H. BANK GUARANTEE (BG) / PERFORMANCE BANK GUARANTEE (PBG):

1. Bank guarantee (BG) / Performance bank guarantee (PBG) will be applicable as called in the tender documents. Such PBG shall be valid for a period of Warranty Period + claim period of 3 months for a value equal to 10 % of the basic value of the purchase order. No deviation for the duration of PBG / BG will be permitted.
 - a. PBG shall be from any of the BHEL consortium of bankers (**refer Annexure V**).
 - b. PBGs from nationalized banks are also acceptable.

- c. PBG should be sent directly by the bank to the dealing executive mentioned in the purchase order located at the address mentioned in the purchase order. PBG should be in the format indicated. **(Refer Annexure III)**. No deviation to these formats will be allowed.
- d. Confirmation from any of the BHEL consortium of banks or any of the Indian Public Sector Banks is essential for the acceptance of PBGs issued by foreign banks (located outside India).
- e. Expired BGs / PBGs will be returned only after expiry of the claim period or on completion of the contractual obligation.
- f. In case vendor does not accept for submission of PBG, the vendor is liable for rejection on commercial grounds.

I. DOCUMENTS (TRIPLICATE COPIES) REQUIRED AT THE TIME OF DISPATCH FOR PROCESSING OF BILL:

1. FOR INDIGENOUS SCOPE OF SUPPLY:

For Supply: Invoice in Triplicate, Lorry receipt (LR) copy, Packing List, PSI Call Letter Copy, Proof of delivery such as MRC (Material Receipt Certificate)/ original acknowledged LR, Insurance intimation Letter and Warranty Certificate. Note that document pertaining to Proof of delivery shall clearly mention number of boxes/panels etc which shall be in line with the Packing list.

For I&C: Supplementary Invoice in Triplicate with copy of I&C Certificate (Proof of Completion of I&C).

For PBG: Supplementary Invoice in Triplicate with copy of PBG. However, PBG should reach concerned Purchase Officer directly from the Bank.

2. FOR IMPORTED SCOPE OF SUPPLY:

For Supply: Invoice in Triplicate, Air Way Bill/Bill of Lading, Packing List, PSI Call Letter Copy, and Warranty Certificate.

For I&C: Supplementary Invoice in Triplicate with copy of I&C Certificate (Proof of Completion of I&C).

For PBG: Supplementary Invoice in Triplicate with copy of PBG. Both PBG & supplementary invoice should reach concerned Purchase Officer directly from the Bank.

J. PROVISIONS APPLICABLE FOR MSE VENDORS (MICRO AND SMALL ENTERPRISES)

Vendors who qualify as MSE vendors are requested to submit applicable certificates (as specified by the Ministry of Micro, Small and Medium Enterprises) at the time of vendor registration. Vendors have to submit any of the following documents along with the tender documents in the Part I / Technical bid cover to avail the applicable benefits.

- a. Valid NSIC certificate or
- b. Entrepreneur's Memorandum part II (EM II) certificate (deemed valid for 2 years).
- c. EM II certificate with CA certificate **(in the prescribed format given in Annexure VIII)** applicable for the year certifying that the investment in plant and machinery of the vendor is within permissible limits as per the MSME Act 2006 for relevant status where the deemed validity is over.
- d. Documents submitted for establishing the credentials of MSE vendors must be valid as on the date of part I / technical bid opening for the vendors to be eligible for the benefits applicable for MSE vendors. Documents submitted after the Part I / Technical bid opening date will not be considered for this tender.

PURCHASE PREFERENCE FOR MSE VENDORS:

- e. MSE vendors quoting within a price band of L1 + 15% shall be allowed to supply up to 20% of the requirement against this tender provided.
 - 1. The MSE vendor matches the L1 price.
 - 2. L1 price is from a non MSE vendor.
 - 3. L1 price will be offered to the nearest vendor nearest to L1 in terms of price ranking (L2 - nearest to L1). In case of non-acceptance by the MSE vendor (L2) next ranking MSE vendor will be offered who is within the L1 + 15% band (if L3 is also within 15% band).
 - 4. 20% of the 20% (i.e. 4% of the total enquired quantity) will be earmarked for SC/ST owned MSE firms provided conditions as mentioned in (1) and (2) are fulfilled.
 - 5. In case no vendor under SC / ST category firms are meeting the conditions mentioned in (1) and (2) or have not participated in the tender, in such cases the 4% quantity will be distributed among the other eligible MSE vendors who have participated in the tender.

6. Serial no. 1 to 5 will not be applicable wherever it is not possible to split the tendered quantity / items on account of customer contract requirement, or the items tendered are systems. Such information that tendered quantity will not be split will be indicated in the SCC.

K. INTEGRITY COMMITMENT IN THE TENDER PROCESS, AND EXECUTION OF CONTRACTS:

1. Commitment by BHEL:

BHEL commits to take all measures necessary to prevent corruption in connection with the Tender process and execution of the Contract. BHEL will, during the tender process, treat all bidder / suppliers in a transparent and fair manner, and with equity.

2. Commitment by Bidder(s)/ Contractor(s):

- a. The Bidder(s)/ Contractor(s) commit(s) to take all measures to prevent corruption and will not directly or indirectly try to influence any decision or benefit which he is not legally entitled to.
- b. The Bidder(s)/ Contractor(s) will not enter with other Bidder(s) into any undisclosed agreement or understanding or any actions to restrict competition.
- c. The Bidder(s)/ Contractor(s) will not commit any offence under the relevant Acts. The Bidder(s)/ Contractor(s) will not use improperly, for purposes of competition or personal gain or pass on to others, any information or document provided by BHEL as part of business relationship.
- d. The Bidder(s)/ Contractor(s) will, when presenting his bid, disclose any and all payments he has made, and is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract and shall adhere to the relevant guidelines issued from time to time by Government of India/ BHEL.

If the Bidder(s) / Contractor(s), before award or during execution of the Contract commit(s) a transgression of the above or in any other manner such as to put his reliability or credibility in question, BHEL is entitled to disqualify the Bidder(s) / Contractor (s) from the tender process or terminate the contract and/ or take suitable action as deemed fit.

L. FRAUD PREVENTION POLICY:

The bidder along with its associate/collaborators/sub-contractors/sub-vendors/consultants/service providers shall strictly adhere to BHEL Fraud Prevention Policy displayed on BHEL website <http://www.bhel.com> and shall immediately bring to the notice of BHEL Management about any fraud or suspected fraud as soon as it comes to their notice. Fraud Prevention policy and List of Nodal Officers shall be hosted on BHEL website, vendor portals of Units/regions intranet.

PURCHASE EXECUTIVE



ಭಾರತ್ ಹೆವಿ ಎಲೆಕ್ಟ್ರಿಕಲ್ಸ್ ಲಿಮಿಟೆಡ್
भारत हेवी इलेक्ट्रिकल्स लिमिटेड

Bharat Heavy Electricals Ltd.,
(A Government of India undertaking)
Electronics Division

PB 2606 , Mysore Road Bangalore , 560026 INDIA

SCPV: BOS: GCC - Rev 01

GENERAL COMMERCIAL CONDITIONS FOR CONTRACT (GCC)

These 'General Commercial Conditions for Contract for Purchase' hereinafter referred to as GCC apply to all enquiries, tenders, requests for quotations, orders, contracts and agreements concerning the supply of goods and the rendering of related services (hereinafter referred to as "deliveries") to Bharat Heavy Electricals Limited and any of its units, regions or divisions (hereinafter referred to as "BHEL" or the Purchaser) or its projects / customers.

Any deviations from or additions to these GCC require BHEL's express written consent. The general terms of business or sale of the vendor shall not apply to BHEL. Acceptance, receipt of shipments or services or effecting payment shall not mean that the general terms of business or sale of the vendor have been accepted.

Orders, agreements and amendments thereto shall be binding if made or confirmed by BHEL in writing. Only the Purchasing department of BHEL is authorized to issue the Purchase Order or any amendment thereof.

Definitions: Throughout these conditions and in the specifications, the following terms shall have the meanings assigned to them, unless the subject matter or the context requires otherwise.

- a) 'The Purchaser' means Bharat Heavy Electricals Limited, Electronics division, Mysore road, Bangalore 560 026, a Unit of Bharat Heavy Electricals Limited (A Govt. of India Undertaking) incorporated under the Companies Act having its registered office at BHEL House, Siri Fort, New Delhi-110049, India and shall be deemed to include its successors and assigns. It may also be referred to as BHEL.
- b) 'The vendor' means the person, firm, company or organization on whom the Purchase Order is placed and shall be deemed to include the vendor's successors, representative heirs, executors and administrator as the case may be. It may also be referred to as Seller, Contractor or Supplier.
- c) 'Contract' shall mean and include the Purchase Order incorporating various agreements, viz. tender/ RFQ, offer, letter of intent / acceptance / award, the General Conditions of Contract and Special Conditions of Contract for Purchase, Specifications, Inspection / Quality Plan, Schedule of Prices and Quantities, Drawings, if any enclosed or to be provided by BHEL or his authorized nominee and the samples or patterns if any to be provided under the provisions of the contract.
- d) 'Parties to the Contract' shall mean the 'The Vendor' and the Purchaser as named in the main body of the Purchase Order.
- e) "Bidder" shall mean duly established reputed organisation, manufacturer etc. having requisite financial and technical capability and experience of participating in the bid invited by the purchaser for the tender.
- f) Bid- The term "bid" or "bidding" can also relate to the documented Offer submitted in response to a request for quotation (RFQ) /Tender.

Interpretation:

In the contract, except where the context requires otherwise:

- a) words indicating one gender include all genders;
- b) words indicating the singular also include the plural and words indicating the plural also include the singular;
- c) provisions including the word "agree", "agreed" or "agreement" require the agreement to be recorded in writing, and
- d) "Written" or "in writing" means hand-written, type-written, printed or electronically made, and resulting in a permanent record.

Applicable Conditions:

1. **Price Basis:** All prices shall be firm until the purchase order is executed / completed in all respects. No price variations / escalation shall be permitted unless otherwise such variations / escalations are provided for and agreed by BHEL in writing in the purchase order.
2. **Validity:** The offer will be valid for a period of 90 days from the date of technical bid opening date. Validity beyond 90 days, if required, will be specified in the SCC (special conditions of contract).
3. **Taxes & Duties:** Taxes as mentioned in the Contract Price or Price Schedule shall be paid to the Contractor subject to the Contractor complying with all the statutory requirements and furnishing the relevant documents including error free invoices containing detailed break-up of the taxes. Any duties, levies or taxes not mentioned in Contract Price or Price Schedule but applicable as per any statute(s) shall be deemed to be included in the Contract price and shall be to the account of the Contractor.
The Contractor shall bear and pay all the costs, liabilities, levies, interest, penalties in respect of non-compliances of any legal requirements as per various statutory provisions. The contractor shall keep the owner indemnified at all times from any tax liability, interest, penalties or assessments that may be imposed by the statutory authorities for non-compliances or non-observation of any statutory requirements by the Contractor.
4. **Ordering and confirmation of Order:** Vendor shall send the order acceptance on their company letter head within two weeks from the date of Purchase Order or such other period as specified / agreed by BHEL. BHEL reserves the right to revoke the order placed if the order confirmation differs from the original order placed. The acceptance of goods/services/supplies by BHEL as well as payments made in this regard shall not imply acceptance of any deviations.
The purchase order will be deemed to have been accepted if no communication to the contrary is received within two weeks (or the time limit as specified / agreed by BHEL) from the date of the purchase order.
5. **Documentation:** After receipt of Purchase Order, vendor should submit required documents like drawings, bill of materials, datasheets, catalogues, quality plan, test procedure, type test report , O & M Manuals and/or any other relevant documents as per Specification/Purchase Order, as and when required by BHEL/Customer.
At any stage within the contract period, the vendor shall notify of any error, fault or other defect found in BHEL's documents /specifications or any other items for reference. If and to the extent that (taking account of cost and time) any vendor exercising due care would have discovered the error, fault or other defect when examining the documents/specifications before submitting the tender, the time for completion shall not be extended. However if errors, omissions, ambiguities, inconsistencies, inadequacies or other defects are found in the vendor's documents, they shall be corrected at his cost, notwithstanding any consent or approval.
6. **TERMS OF DELIVERY:**
FOR IMPORTED PURCHASE:
Price offered shall be for goods packed and delivered CIF Seaport/ International Airport (FCA) including packing, forwarding, Handling, Ancillary charges like processing of Sight Draft, negotiation charges of bank, Export declaration, Certificate of origin etc.
Packing shall be Air/Sea worthy, best suitable for trans-shipment and to take care of transit damages. If containerized, no. of containers & size of container shall be mentioned. Packing weight (gross & net) Packing dimensions shall be given prior to shipment to ascertain whether the consignment can be carried on standard cargo in contract or as ODC.
Wooden packing material for all the foreign consignments should be treated as per ISPM-15 & Fumigation / Phytosanitary certificate to be submitted to the freight forwarders/ BHEL along with the invoice, B/L, packing list etc.
Vendors shall indicate the name of International Airport/Seaport. The consignment shall be handed over to BHEL approved freight forwarder as mentioned in PO.

FOR INDIGENOUS PURCHASE:

Equipment shall be delivered on "FOR SITE" basis, inclusive of freight, packing, insurance & forwarding charges.

Packing shall be Road / Rail / Air / Sea worthy, best suitable for transshipment and to take care of transit damages. Smaller consignments can be dispatched through Courier services/ RPP with the prior approval of the purchasing Executive.

Deviation for the delivery term is liable for rejection.

7. Penalty:

For delay in delivery: In the event of delay in agreed contractual delivery as per Purchase Order, penalty @ 0.5 % (half percent) per week or part thereof but limited to a max of 10% (ten percent) value of undelivered portion (basic material cost) will be applicable. Delivery will commence from the date of document approval by customer / BHEL or date of issue of manufacturing clearance, whichever is later. The date for which Inspection call is issued by vendor along with test certificates / test reports / Certificate of Conformance / calibration reports, as proof of completion of manufacturing will be treated as date of deemed delivery for penalty calculation. In the absence of furnishing such document indicated above as proof of completion of manufacturing along with inspection call, actual date of inspection will be considered as date of deemed delivery and BHEL will not be responsible for delay in actual date of inspection.

Penalty for delayed delivery, if applicable, shall be deducted at the time of first payment. If penalty is applicable for duration of less than a week, penalty @ 0.5% (half percent) of the basic material value will be deducted.

8. **Contract variations (Increase or decrease in the scope of supply):** BHEL may vary the contracted scope as per requirements at site. If vendor is of the opinion that the variation has an effect on the agreed price or delivery period, BHEL shall be informed of this immediately in writing along with technical details. Where unit rates are available in the Contract, the same shall be applied to such additional work. Vendor shall not perform additional work before BHEL has issued written instructions / amendment to the Purchase Order to that effect. The work which the vendor should have or could have anticipated in terms of delivering the service(s) and functionality (i.e.) as described in this agreement, or which is considered to be the result of an attributable error on the vendor's part, shall not be considered additional work.
9. **Reverse Auction:** BHEL reserves the right to go for Reverse Auction (RA) (Guidelines as available on www.bhel.com) instead of opening the sealed envelope price bid, submitted by the bidder. This will be decided after techno-commercial evaluation. Bidders to give their acceptance with the offer for participation in RA. Non-acceptance to participate in RA may result in non- consideration of their bids, in case BHEL decides to go for RA.

Those bidders who have given their acceptance to participate in Reverse Auction will have to necessarily submit 'Process compliance form' (to the designated service provider) as well as 'Online sealed bid' in the Reverse Auction. Non-submission of 'Process compliance form' or 'Online sealed bid' by the agreed bidder(s) will be considered as tampering of the tender process and will invite action by BHEL as per extant guidelines for suspension of business dealings with suppliers/ contractors (as available on www.bhel.com).

The bidders have to necessarily submit online sealed bid less than or equal to their envelope sealed price bid already submitted to BHEL along with the offer. The envelope sealed price bid of successful L1 bidder in RA, if conducted, shall also be opened after RA and the order will be placed on lower of the two bids (RA closing price & envelope sealed price) thus obtained. The bidder having submitted this offer specifically agrees to this condition and undertakes to execute the contract on thus awarded rates.

If it is found that L1 bidder has quoted higher in online sealed bid in comparison to envelope sealed bid for any item(s), the bidder will be issued a warning letter to this effect. However, if the same bidder again defaults on this count in any subsequent tender in the unit, it will be considered as fraud and will invite

action by BHEL as per extant guidelines for suspension of business dealings with suppliers/ contractors (as available on www.bhel.com).

10. **Pre Shipment Inspection:** Prior written notice of at least one week shall be given along with internal test certificates / COC and applicable test certificates. Materials will be inspected by BHEL-EDN-QS/CQS or BHEL nominated Third Party Inspection Agency (TPIA) or BHEL authorized Inspection Agency or Customer / Consultant or jointly by BHEL & Customer / consultant. All tests have to be conducted as applicable in line with approved Quality plan or QA Checklist or Purchase specification and original reports shall be furnished to BHEL-EDN, Bangalore for verification / acceptance for issue of dispatch clearance.
All costs related to inspections & re-inspections shall be borne by vendor. Whether the Contract provides for tests on the premises of the vendor or any of his Sub-contractor/s, vendor shall be responsible to provide such assistance, labour, materials, electricity, fuels, stores, apparatus, instruments as may be required and as may be reasonably demanded to carry out such tests efficiently. Cost of any type test or such other special tests shall be borne by BHEL only if specifically agreed to in the purchase order.
11. **Transit Insurance:** Transit insurance coverage between vendor's works and project site shall be to the account of BHEL, unless specifically agreed otherwise. However, vendor shall send intimation directly to insurance agency through fax/courier/e-mail, immediately on dispatch of goods for covering insurance. A copy of such intimation sent by vendor to insurance agency shall be given to BHEL along with dispatch documents. Dispatch documents will be treated as incomplete without such intimation copy. BHEL shall not be responsible for sending intimations to insurance agency on behalf of the vendor.
12. **Packaging and dispatch:** The Seller shall package the goods safely and carefully and pack them suitably in all respects considering the peculiarity of the material for normal safe transport by Sea / Air / Rail / Road to its destination suitably protected against loss, damage, corrosion in transit and the effect of tropical salt laden atmosphere. The packages shall be provided with fixtures / hooks and sling marks as may be required for easy and safe handling. If any consignment needs special handling instruction, the same shall be clearly marked with standard symbols / instructions. Hazardous material should be notified as such and their packing, transportation and other protection must conform to relevant regulations.
The packing, shipping, storage and processing of the goods must comply with the prevailing legislation and regulations concerning safety, the environment and working conditions. Any Imported/Physical Exports items packed with raw / solid wood packing material should be treated as per ISPM – 15 (fumigation) and accompanied by Phytosanitary / Fumigation certificate. If safety information sheets (MSDS – Material Safety Data Sheet) exist for an item or the packaging, vendor must provide this information without fail along with the consignment.
Each package must be marked with Consignee name, Purchase order number, Package number, Gross weight and net weight, dimensions (L x B x H) and Seller's name. Packing list of goods inside each package with PO item number and quantity must also be fixed securely outside the box to indicate the contents of each box. Total number of packages in the consignment must also be indicated.
Separate packing & identification of items should be as follows.
 1. Main Scope - All items must be tagged with part no. & item description.
 2. Commissioning spares - All items must be tagged with part no. & item description.
 3. Mandatory spares - All items must be tagged with part no. & item description.
13. **Assignment of Rights & Obligations; Subcontracting:** Vendor is not permitted to subcontract the delivery or any part thereof to third party or to assign the rights and obligations resulting from this agreement in whole or in part to third parties without prior written permission from BHEL. Any permission or approval given by the BHEL shall, however, not absolve the vendor of the responsibility of his obligations under the Contract.
14. **Progress report:** Vendor shall render such report as to the progress of work and in such form as may be called for by the concerned purchase officer from time to time. The submission and acceptance of such reports shall not prejudice the rights of BHEL in any manner.
15. **Non-disclosure and Information Obligations: Vendor** shall provide with all necessary information pertaining to the goods as it could be of importance to BHEL. Vendor shall not reveal confidential information that may be divulged by BHEL to Vendor's employees not involved with the tender/ contract &

its execution and delivery or to third parties, unless BHEL has agreed to this in writing beforehand. Vendor shall not be entitled to use the BHEL name in advertisements and other commercial publications without prior written permission from BHEL.

16. **Cancellation / Termination of contract:** BHEL shall have the right to completely or partially terminate the agreement by means of written notice to that effect. Termination of the Contract, for whatever reason, shall be without prejudice to the rights of the parties accrued under the Contract up to the time of termination.
BHEL shall have the right to cancel/foreclose the Order/ Contract, wholly or in part, in case it is constrained to do so, on account of any decline, diminution, curtailment or stoppage of the business.
17. **Risk Purchase Clause:** In case of failure of supplier, BHEL at its discretion may make purchase of the materials / services NOT supplied / rendered in time at the RISK & COST of the supplier. Under such situation, the supplier who fails to supply the goods in time shall be wholly liable to make good to BHEL any loss due to risk purchase.
In case of items demanding services at site like erection and commissioning, vendor should send his servicemen /representatives within 7 days from the service call. In case a vendor fails to attend to the service call, BHEL at its discretion may also make arrangements to attend such service by other parties at the **RISK & COST** of the supplier. Under such situation the supplier who fails to attend the service shall be wholly liable to make good to BHEL any loss due to risk purchase / service including additional handling charges due to the change.
18. **Shortages:** In the event of shortage on receipt of goods and/or on opening of packages at site, all such shortages shall be made good within a reasonable time that BHEL may allow from such intimation and free of cost.
Transit Damages: In the event of receipt of goods in damaged condition or having found them so upon opening of packages at site, Supplier shall make good of all such damages within a reasonable time from such intimation by BHEL.
19. **Remedial work:** Notwithstanding any previous test or certification, BHEL may instruct the vendor to remove and replace materials/goods or remove and re-execute works/services which are not in accordance with the purchase order. Similarly BHEL may ask the vendor to supply materials or to execute any services which are urgently required for any safety reasons, whether arising out of or because of an accident, unforeseeable event or otherwise. In such an event, Vendor shall provide such services within a reasonable time as specified by BHEL.
20. **Indemnity Clause:** Vendor shall comply with all applicable safety regulations and take care for the safety of all persons involved. Vendor is fully responsible for the safety of its personnel or that of his subcontractor's men / property, during execution of the Purchase Order and related services. All statutory payments including PF, ESI or other related charges have to be borne by the vendor. Vendor is fully responsible for ensuring that all legal compliances are followed in course of such employment.
21. **Product Information, Drawings and Documents:** Drawings, technical documents or other technical information received by Vendor from BHEL or vice versa shall not, without the consent of the other party, be used for any other purpose than that for which they were provided. They may not, without the consent of the Disclosing party, otherwise be used or copied, reproduced, transmitted or communicated to third parties. All information and data contained in general product documentation, whether in electronic or any other form, are binding only to the extent that they are by reference expressly included in the contract.
Vendor, as per agreed date/s but not later than the date of delivery, provide free of charge information and drawings which are necessary to permit and enable BHEL to erect, commission, operate and maintain the product. Such information and drawings shall be supplied in as many numbers of copies as may be agreed upon.
All intellectual properties, including designs, drawings and product information etc. exchanged during the formation and execution of the Contract shall continue to be the property of the disclosing party.
22. **Intellectual Property Rights, Licenses:** If any Patent, design, Trade mark or any other intellectual property rights apply to the delivery (goods / related service) or accompanying documentation shall be the exclusive

property of the Vendor and BHEL shall be entitled to the legal use thereof free of charge by means of a non-exclusive, worldwide, perpetual license. All intellectual property rights that arise during the execution of the Purchase Order/ contract for delivery by vendor and/or by its employees or third parties involved by the vendor for performance of the agreement shall belong to BHEL. Vendor shall perform everything necessary to obtain or establish the above mentioned rights. The Vendor guarantees that the delivery does not infringe on any of the intellectual property rights of third parties. The Vendor shall do everything necessary to obtain or establish the alternate acceptable arrangement pending resolution of any (alleged) claims by third parties. The Vendor shall indemnify BHEL against any (alleged) claims by third parties in this regard and shall reimburse BHEL for any damages suffered as a result thereof.

23. **Force Majeure:** Notwithstanding anything contained in the purchase order or any other document relevant thereto, neither party shall be liable for any failure or delay in performance to the extent said failures or delays are caused by the "Act of God" and occurring without its fault or negligence, provided that, force majeure will apply only if the failure to perform could not be avoided by the exercise of due care and vendor doing everything reasonably possible to resume its performance.

A party affected by an event of force majeure which may include fire, tempest, floods, earthquake, riot, war, damage by aircraft etc., shall give the other party written notice, with full details as soon as possible and in any event not later than seven (7) calendar days of the occurrence of the cause relied upon. If force majeure applies, dates by which performance obligations are scheduled to be met will be extended for a period of time equal to the time lost due to any delay so caused.

Notwithstanding above provisions, in an event of Force Majeure, BHEL reserves for itself the right to cancel the order/ contract, wholly or partly, in order to meet the overall project schedule and make alternative arrangements for completion of deliveries and other schedules.

24. **Guarantee / Warranty:** Wherever required, and so provided in the specifications / Purchaser Order, the Seller shall guarantee that the stores supplied shall comply with the specifications laid down, for materials, workmanship and performance. The guarantee / warranty period as described shall apply afresh to replaced, repaired or re-executed parts of a delivery. If the vendor fails to take proper corrective action to repair/replace defects satisfactorily within a reasonable period, Purchaser shall be free to take corrective action as may be deemed necessary at vendor's risk and cost after giving notice to the vendor, including arranging supply of goods from elsewhere at the sole risk and cost of the vendor. Unless otherwise specifically provided in the Purchase Order, Vendor's liability shall be co terminus with the expiration of the applicable guarantee / warranty period.

25. **Limitation of Liability:** Vendor's liability towards this contract is limited to a maximum of 100% of the contract value and consequential damages are excluded. However the limits of liability will have no effect in cases of criminal negligence or wilful misconduct.

The total liability of Vendor for all claims arising out of or relating to the performance or breach of the Contract or use of any Products or Services or any order shall not exceed the total Contract price.

26. **Liability during guarantee / warranty:** Vendor shall arrange replacement / repair of all the defective materials / services under its obligation under the guarantee / warranty period. The rejected goods shall be taken away by vendor and replaced / repaired. In the event of the vendor's failure to comply, BHEL may take appropriate action including disposal of rejections and replenishment by any other sources at the cost and risk of the vendor.

In case, defects attributable to vendor are detected during first time commissioning or use, vendor shall be responsible for replacement / repair of the goods as required by BHEL at vendor's cost. In all such cases expiry of guarantee / warranty will not be applicable.

27. **Liability after guarantee / warranty period:** At the end of the guarantee / warranty, the Vendor's liability ceases except for latent defects (latent defects are defects / performance issues noticed after the guarantee / warranty has expired). The Contractor's liability for latent defects warranty for the plant and equipment including spares shall be limited to a period of six months from the end of the guarantee / as specified in RFQ.

28. **Compliance with Laws:** Vendor shall, in performing the contract, comply with all applicable laws. The vendor shall make all remittances, give all notices, pay all taxes, duties and fees, and obtain all permits, licences and approvals, as required by the laws in relation to the execution and completion of the contract and for remedying of any defects; and the Contractor shall indemnify and hold BHEL harmless against and from the consequences of any failure to do so.
29. **Settlement of Disputes:** Except as otherwise specifically provided in the Purchase Order, decision of BHEL shall be binding on the vendor with respect to all questions relating to the interpretation or meaning of the terms and conditions and instructions herein before mentioned and as to the completion of supplies/work/services, other questions, claim, right, matter or things whatsoever in any way arising out of or relating to the contract, instructions, orders or these conditions or otherwise concerning the supply or the execution or failure to execute the order, whether arising during the schedule of supply/work or after the completion or abandonment thereof. Any disputes or differences among the parties shall to the extent possible be settled amicably between the parties thereto, failing which the disputed issues shall be settled through arbitration. Vendor shall continue to perform the contract, pending settlement of dispute(s).
30. **Arbitration Clause:** In case amicable settlement is not reached in the event of any dispute or difference arising out of the execution of the Contract or the respective rights and liabilities of the parties or in relation to interpretation of any provision in any manner touching upon the Contract, such dispute or difference shall (except as to any matters, the decision of which is specifically provided for therein) be referred by either party to the sole arbitration of an Arbitrator appointed by the Executive Director/ General Manager of the purchasing unit/ region/ division of BHEL. Vendor shall have no objection even if the Arbitrator so appointed is an employee of BHEL or has ever dealt/ had to deal with any matter relating to this Contract. Subject as aforesaid the provisions of the Arbitration and Conciliation Act, 1996 of India or any statutory modification or re-enactment thereof and the rules made there under and for the time being in force shall apply to the arbitration proceedings under this clause. It is a term of contract that the party initiating arbitration shall specify the dispute or disputes to be referred to arbitration under this clause together with the amount or amounts claimed in respect of each such dispute. The venue for the arbitration shall be Bangalore, India. The award of the arbitrator shall be a speaking award and shall be final, conclusive and binding on all parties to this contract.
The cost of arbitration shall be borne equally by the parties. Notwithstanding the existence of any dispute or difference or any reference for the arbitration, the vendor shall proceed with and continue without hindrance the performance of the work under the contract with due diligence and expedition in a professional manner.
31. **Applicable Laws and Jurisdiction of Courts:** Prevailing Indian laws both substantive and procedural, including modifications thereto, shall govern the Contract. Subject to the conditions as aforesaid, the competent courts in BANGALORE alone shall have jurisdiction to consider over any matters touching upon this contract.
32. **General Terms:** That any non-exercise, forbearance or omission of any of the powers conferred on BHEL and /or any of its authorities will not in any manner constitute waiver of the conditions hereto contained in these presents.
That the headings used in this agreement are for convenience of reference only.
That all notices etc., to be given under the Purchase order shall be in writing, type script or printed and if sent by registered post or by courier service to the address given in this document shall be deemed to have been served on the date when in the ordinary course, they would have been delivered to the addressee.

ANNEXURE - I
LIST OF INTERNATIONAL GATEWAY AIRPORTS

SCHEDULE NO	COUNTRY	CURRENCY CODE	AIRPORT
D01	UK	GBP	LONDON (HEATHROW)
D02	UK	GBP	NEW CASTLE
D03	UK	GBP	OXFORD. CHETLAM
D04	UK	GBP	BRISTOL. WELLINGBOROUGH
D05	UK	GBP	BIRMINGHAM
D06	UK	GBP	EAST MIDLANDS
D07	UK	GBP	MANCHESTER
D08	UK	GBP	LEEDS
D09	UK	GBP	GLASGOW
D10	FRANCE	EURO	PARIS (ROISSY) & LYON
D11	SWEDEN	EURO	STOCKHOLM
D12	SWEDEN	EURO	GOTHENBERG & MALMO
D13	ITALY	EURO	ROMA, MILAN
D14	ITALY	EURO	TURIN, BOLOGNA, FLORENCE
D15	NETHERLANDS	EURO	AMSTERDAM, ROTTERDAM
D16	AUSTRIA	EURO	VIENNA, LINZ, GRAZ
D17	BELGIUM	EURO	ANTWERP, BRUSSELS
D18	DENMARK	DKK	COPENHAGEN
D19	JAPAN	JPY	TOKYO, OSAKA
D20	SINGAPORE	SGD	SINGAPORE
D21	CANADA	CAD	TORONTO
D22	CANADA	CAD	MONTREAL
D23	USA	USD	NEW YORK, BOSTON
D24	USA	USD	CHICAGO
D25	USA	USD	SAN FRANCISCO, LOS ANGELES
D26	USA	USD	ALANTA, HOUSTON
D27	GERMANY	EURO	MUNICH, KOLN, DUSSELDORF, HANNOVER, HAMBURG, STUTTGART, DAMSTADT, MANIHIEM, NURUMBERG
D28	GERMANY	EURO	FRANKFURT
D29	GERMANY	EURO	BERLIN
D30	SWITZERLAND	SFR	BASLE, ZURICH, GENEVA
D31	SPAIN	EURO	BARCELONA
D32	AUSTRALIA	AUD	SYDNEY
D33	AUSTRALIA	AUD	MELBOURNE
D34	AUSTRALIA	AUD	PERTH
D35	CZECH	EURO	PRAGUE
D36	HONG KONG	HKD	HONG KONG
D37	NEW ZELAND	NZD	AUCKLAND
D38	RUSSIA	USD	MOSCOW
D39	SOUTH KOREA	USD	KIMPO INTERNATIONAL, INCHEON
D40	FINLAND	EURO	HELSINKI
D41	ROMANIA	EURO	BUCHAREST
D42	NORWAY	EURO	OSLO
D43	IRELAND	EURO	DUBLIN
D44	ISRAEL	USD	TEL AVIV
D45	UAE	USD	DUBAI
D46	OMAN	USD	MUSCAT
D47	EGYPT	USD	CAIRO
D48	TAIWAN	USD	TAIPEI
D49	UKRAINE	USD	KIEV
D50	CHINA	USD	SHANGHAI, SHENZHEN
D51	PHILIPINES	USD	MANILA
D52	MALAYSIA	USD	KUALALUMPUR, PE NANG
D53	CYPRUS	USD	LARNACA
D54	SOUTH AFRICA	USD	JOHANNESBERG, DURBAN
D55	SLOVAKIA	EURO	BARTISLOVA
D56	SAUDI ARABIA	SAR	RIYADH
D57	TURKEY	EURO	ISTANBUL
D58	THAILAND	USD	BANGKOK
D59	BRAZIL	USD	SAO PAULO, RIO DE JANEIRO

ANNEXURE - II
REQUEST FOR C FORM

NAME OF VENDOR :

VENDOR CODE ALLOTTED BY BHEL :

E mail id for c form correspondence :

BHEL PO NO	INVOICE NO	INVOICE DATE	INVOICE AMOUNT	SUPPLY FROM - STATE	SUPPLY TO - STATE	CST TIN NUMBER (SUPPLIER)	INVOICE AMOUNT EXCLUDING FREIGHT	C FORM QTR	YEAR	SUPPLY TO BHEL EDN / SITE
---------------	---------------	-----------------	-------------------	---------------------------	-------------------------	-------------------------------------	---	---------------	------	---------------------------------

Please note that one 'C' form will be issued for a quarter.

Any modification and cancellation of c form is not possible from our end since it is generated online therefore include all invoices pertaining to quarter in your request
Also check the data are correct in all respect

General Instruction:

1. C form request should be given only in this file.
2. Amount should be 100% of Invoice value but should Not include freight, Insurance etc.
3. PO No. should be numeric, starting with 4 and has 10 digits
4. For every quarter separate file to be provided
5. All Invoices pertaining to the relevant quarter to be included.
6. No corrections will be entertained once c-form is issued.

ANNEXURE-III

BANK GUARANTEE FOR PERFORMANCE SECURITY

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

Dear Sirs,

In consideration of the Bharat Heavy Electricals Limited ¹ (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at _____ through its Unit at.....(name of the Unit) having awarded to (Name of the Vendor / Contractor / Supplier) having its registered office at _____ ² hereinafter referred to as the 'Contractor/Supplier', which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref No.....dated³ valued at Rs.....⁴ (Rupees -----)/FC.....(in words.....) for⁵ (hereinafter called the 'Contract') and the Contractor having agreed to provide a Contract Performance Guarantee, equivalent to% (.... Percent) of the said value of the Contract to the Employer for the faithful performance of the Contract,

we,, (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby, irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer a maximum amount Rs ----- (Rupees -----) without any demur, immediately on a demand from the Employer, .

Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor/ Supplier in any suit or proceeding pending before any Court or Tribunal relating thereto our liability under this present being absolute and unequivocal.

The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment thereunder and the contractors/supplier shall have no claim against us for making such payment.

We thebank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

We BANK further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Contractor/Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Contractor/Supplier and to forbear or enforce any of the terms and conditions relating to the said Agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Contractor/Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Contractor/Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's liabilities.

This Guarantee shall remain in force upto and including.....⁶ and shall be extended from time to time for such period as may be desired by Employer.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor/Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

Unless a demand or claim under this guarantee is made on us in writing on or before the⁷ we shall be discharged from all liabilities under this guarantee thereafter.

We, BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁸
- b) This Guarantee shall be valid up to⁹
- c) Unless the Bank is served a written claim or demand on or before _____¹⁰ all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

¹ NAME AND ADDRESS OF EMPLOYER I.e Bharat Heavy Electricals Limited

² NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER.

³ DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

⁴ PROJECT/SUPPLY DETAILS

⁵ BG AMOUNT IN FIGURES AND WORDS

⁶ VALIDITY DATE

⁷ DATE OF EXPIRY OF CLAIM PERIOD

⁸ BG AMOUNT IN FIGURES AND WORDS.

⁹ VALIDITY DATE

¹⁰ DATE OF EXPIRY OF CLAIM PERIOD

Note:

1. In Case of Bank Guarantees submitted by Foreign Vendors-

- a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
- b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank (BHEL's Consortium Bank). It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2 **In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank** (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at **sl.no. b.1** will required to be followed.
 - b.3 The BG issued may preferably be subject to Uniform Rules for Demand Guarantees (URDG) 758 (as amended from time to time). In case, of Foreign Vendors, the BG Format provided to them should clearly specify the same.
 - b.4 The BG should clearly specify that the demand or other document can be presented in electronic form.

ANNEXURE - IV

Electronic Funds Transfer (EFT) OR Paylink Direct Credit Form

Please Fill up the form in **CAPITAL LETTERS** only.

TYPE OF REQUEST(Tick one): _____ CREATE _____ CHANGE

BHEL Vendor / Supplier Code:	
Company Name :	
Permanent Account Number(PAN):	
Address	

City: _____	PINCODE _____	STATE _____
-------------	---------------	-------------

Contact Person(s)	
Telephone No:	
Fax No:	
e-mail id:	

1 Bank Name:	
2 Bank Address:	
3 Bank Telephone No:	
4 Bank Account No:	
5 Account Type: Savings/Cash Credit	
6 9 Digit Code Number of Bank and branch appearing on MICR cheque issued by Bank	
7 Bank swift Code(applicable for EFT only)	
8 Bank IFSC code(applicable for RTGS)	
9 Bank IFSC code(applicable for NEFT)	

- A I hereby certify that the particulars given above are true, correct and complete and that I, as a representative for the above named Company, hereby authorise BHEL, EDN, Bangalore to electronically deposit payments to the designated bank account.
- B If the transaction is delayed or not effected at all for reasons of incomplete or incorrect information, I would not hold BHEL / transferring Bank responsible.
- C This authority remains in full force until BHEL, EDN, Bangalore receives written notification requesting a change or cancellation.
- D I have read the contents of the covering letter and agree to discharge the responsibility expected of me as a participant under ECS / EFT.

Date:

Authorised Signatory:

Designation:

Telephone NO. with STD Code

Company Seal

Bank Certificate

We certify that _____ has an Account No _____ with us and we confirm that the bank details given above are correct as per our records.

Date: _____ (.....)

Place: _____ Signature

Please return completed form along with a blank cancelled cheque or photocopy thereof to:

Bharath Heavy Electricals Ltd,

Attn:

Electronics Division, Mysore Road,

BANGALORE - 560 026

In case of any Query, please call : 080-26998xxx / 2674xxxx or fax no. 080-2674xxxx

ANNEXURE-V
BHEL MEMBER BANKS (LIST OF CONSORTIUM BANKS)

BANK GUARANTEE (BG) SHALL BE ISSUED FROM THE FOLLOWING BANKS ONLY:

	Nationalised Banks		Nationalised Banks
1	Allahabad Bank	19	Vijaya Bank
2	Andhra Bank		Public Sector Banks
3	Bank of Baroda	20	IDBI
4	Canara Bank		Foreign Banks
5	Corporation Bank	21	CITI Bank N.A
6	Central Bank	22	Deutsche Bank AG
7	Indian Bank	23	The Hongkong and Shanghai Banking Corporation Ltd. (HSBC)
8	Indian Overseas Bank	24	Standard Chartered Bank
9	Oriental Bank of Commerce		
10	Punjab National Bank	26	J P Morgan
11	Punjab & Sindh Bank		Private Banks
12	State Bank of India	27	Axis Bank
13	State Bank of Hyderabad	28	The Federal Bank Limited
14	Syndicate Bank	29	HDFC Bank
15	State Bank of Travancore	30	Kotak Mahindra Bank Ltd
16	UCO Bank	31	ICICI Bank
17	Union Bank of India	32	IndusInd Bank
18	United Bank of India	33	Yes Bank

Note:

- All BGs must be issued from BHEL consortium banks listed above.
- BHEL may accept BG from other Nationalised Banks also which are not listed above.
- BG will not be accepted from Scheduled Banks and Co-operative Banks.
- In case BG is issued from a bank located outside Indian territory and is issued in foreign currency, the BG must be routed through and confirmed by any one of the above mentioned consortium banks or any of the Indian Public Sector Banks.
- This list is subject to changes. Hence vendors are requested to check this list every time before issuing BGs.

ANNEXURE - VI

DISCREPANCY IN WORDS & FIGURES – QUOTED IN PRICE BID

Following guidelines will be followed in case of discrepancy in words & figures-quoted in price bid:

- (a) If, in the price structure quoted for the required goods/services/works, there is discrepancy between the unit price and the total price (which is obtained by multiplying the unit price by the quantity), the unit price shall prevail and the total price corrected accordingly, unless in the opinion of the purchaser there is an obvious misplacement of the decimal point in the unit price, in which case the total price as quoted shall govern and the unit price corrected accordingly.
- (b) If there is an error in a total corresponding to the addition or subtraction of subtotals, the subtotals shall prevail and the total shall be corrected; and
- (c) If there is a discrepancy between words and figures, the amount in words shall prevail, unless the amount expressed in words is related to an arithmetic error, in which case the amount in figures shall prevail subject to (a) and (b) above.
- (d) If there is such discrepancy in an offer, the same shall be conveyed to the bidder with target date upto which the bidder has to send his acceptance on the above lines and if the bidder does not agree to the decision of the purchaser, the bid is liable to be ignored.

ANNEXURE - VII

BENEFITS FOR MSE SUPPLIERS AS PER MSMED ACT 2006 AND PUBLIC PROCUREMENT POLICY 2012

MSE suppliers can avail the intended benefits only if they submit along with the offer, attested copies of either EM II certificate having deemed validity (five years from the date of issue of Acknowledgement in EM II).

Or

Valid NSIC certificate or EM II certificate along with attested copy of CA certificate (Format enclosed: ANNEXURE VIII) where deemed validity of EM II certificate of five years has expired) applicable for the relevant financial year (latest audited).

Date to be reckoned for determining the deemed validity will be the date of bid opening (Part 1 in case of two part bid).

Non-submission of such documents will lead to consideration of their bid at par with other bidders.

No benefit shall be applicable for this enquiry if any deficiency in the above required documents are not submitted before price bid opening. If the tender is to be submitted through e-procurement portal, then the above required documents are to be uploaded on the portal. Documents should be notarized or attested by a Gazette officer.

ANNEXURE - VIII
CERTIFICATE BY CHARTERED ACCOUNTANT ON LETTER HEAD

This is to certify that M/s
.....(Hereinafter referred to as 'Company') having
its registered office at is registered under MSMED Act 2006, (Entrepreneur
Memorandum No ((Part-II) dtd Category:
(Micro/Small). (Copy enclosed).

Further verified from the Books of Accounts that the investment of the company as per the
latest audited financial year **as per MSMED Act 2006 is as follows:**

1. For Manufacturing Enterprises: Investment in plant and machinery (i.e., original cost excluding land
and building and the items specified by the Ministry of Small Industries vide its notification No.S.O.1722
(E) dated October 5, 2006:

Rs.Lacs.

2. For Service Enterprises: Investment in equipment (original cost excluding land and building
and furniture, fittings and other items not directly related to the service rendered or as may be
notified under the MSMED Act, 2006:

Rs.Lacs.

The above investment of Rs. Lacs in within permissible limit of Rs..... Lacs
for.....Micro / Small (Strike off which is not applicable) Category under MSMED
Act 2006.

(or)

The company has been graduated from its original category (Micro/Small) (Strike off which is not
applicable) and the date of graduation of such enterprise from its original category is
.....(dd/mm/yy) which is within the period of 3 years from the date of graduation of such enterprise
from its original category as notified vide S.O.No.3322(E) dated 01.11.2013 published in the gazette
notification dated 04.11.2013 by Ministry of MSME.

Date:

(Signature)

Name -

Membership Number -

Seal of Chartered Accountant

ANNEXURE - IX

In case of intrastate movement i.e. supply within same state and VAT is applicable, the vendor shall furnish the respective BHEL™s nodal agency TIN no. and address in their invoice.

List of Statewise Nodal Officers with Contact Details

Region	State	Nodal Unit responsible for all other units except those in column 4	Contact Details- Landline No.	E-mail	TIN No.	CST No.
1	2	3		7	8	9
Norther States	Jammu & Kashmir	PSNR	0120-2510488/2416452	rahulb@bhelspsnr.co.in / a.chadha@bhelspsnr.co.in	01291101313	
	Himachal Pradesh	PSNR			02011000622	
	Punjab	PSNR			03451148722	
	Haryana	PSNR			06962606884	
	Rajasthan	PSNR			08232903345	
	Uttar Pradesh	PSNR	0120-2416536	rahulb@bhelspsnr.co.in / smittal@bhelspsnr.co.in	09365800914	
	Uttarakhand	Hardwar	01334-285449	alok@bhelhwr.co.in	05001757277 Dated 30th Sep 2005	5000030 Dated 13/03/1965
	Delhi	TBG	0120-6748429	skindal@bhel.in	07472001760	07472001760
Western States	Madhya Pradesh	Bhopal	0755-2503231	meeta@bhelbpl.co.in	23573600001 (HEL/05/01/0001/S dated 15/11/1979 under MPCT)	HEL/05/01/0004/C dated 15/11/1979
	Chattisgarh	PSWR	0712-3048609	mgupta@bhelspswr.co.in	22173202974	
	Gujarat	PSWR	0265-2370321	bhavin@bhelspswr.co.in	24190101571	
	Maharashtra	ROD Mumbai	022-22126061/22187850	mahajani@bhel.in	27060300130V	27060300130C
	Daman & Diu	EDN	080-26998724 / 26998830	theerthagiri@bheledn.co.in	25000009902	
Southern States	Orissa	PSSR	044-28286773	sparida@bhelspsr.co.in / lakshmi@bhelspsr.co.in	21031301916	
	Tamil Nadu	Trichy	0431-2577757/ 2577229	msrao@bheltry.co.in / bharaths@bheltry.co.in	33243560005	239383 dt.11.6.91
	Kerala	PSSR	044-28286773	lakshmi@bhelspsr.co.in	32072043622	
	Karnataka	EDN	080-26998724 / 26998830	theerthagiri@bheledn.co.in	29180069268	00850081
	Telangana	HPEP RC, Puram	040-23185406/ 040-23182238	chand@bhelhyd.co.in / sbsv@bhelhyd.co.in	36360151179	
	Andhra Pradesh	HPVP, Vizag	0891-6681298	sarmaass@bhpvl.com	37418632431	
	Puducherry	PSSR				
Eastern States	West Bengal	PSER	033-23216130-3238	amitavac@bhelpser.co.in	19200936019	19200936213
	Bihar	PSER	0612-2231275	rakesh@bhelpser.co.in	10010994046	10010994046
	Jharkhand	PSER	06549-266351(Sh. Parmanand Swaroop)/06534-292179 (Sh. K.K. Ajeet)	pswaroop@bhelpser.co.in (Bokaro) kk.ajit@bhelpser.co.in (Koderma/Abhijeet/North Karanpura) manishk.jain@bhelpser.co.in (Chandrapura)/ kpsubbu@bhelspsr.co.in	20352205642 (Bokaro) 20082005255 (Maithon) 20512405410 (Koderma) 20122200394 (Chandrapura) 20620905730 (Adhunik) 20650507026 (Abhijeet) 20452110016 (North Karanpura)	TG-729(C)
	Mizoram	PSER	033-23216130-3249	anindya@bhelpser.co.in	15501465017	
	Arunachal Pradesh	PSER	033-23216130-3249	anindya@bhelpser.co.in	12020122182	Not Applied
	Assam	PSER	033-23216130-3249	anindya@bhelpser.co.in	18790101415	18179903204
	Tripura	PSER	03821-265209	mkmahato@bhelpser.co.in	16060947071	16060947273
	Sikkim	PSER				
	Meghalaya	PSER				
	Manipur	PSER				
	Nagaland	PSER				