

TENDER SPECIFICATION BHEL PSSR SCT 1893

for

**Civil, Structural & Architectural works of
400 kV Switch Yard and Control Room
of all units (i.e Unit 1 to 5) of
5 x 800MW Yadadri TPS,
Veerlapalem Village, Dameracherla Mandal,
Nalgonda District, Telangana State**

VOLUME –II PRICE BID



BHARAT HEAVY ELECTRICALS LIMITED


(A Government of India Undertaking)

Power Sector – Southern Region

690, Anna Salai, Nandanam, Chennai – 600 035

TENDER SPECIFICATION CONSISTS OF

Tender Specification

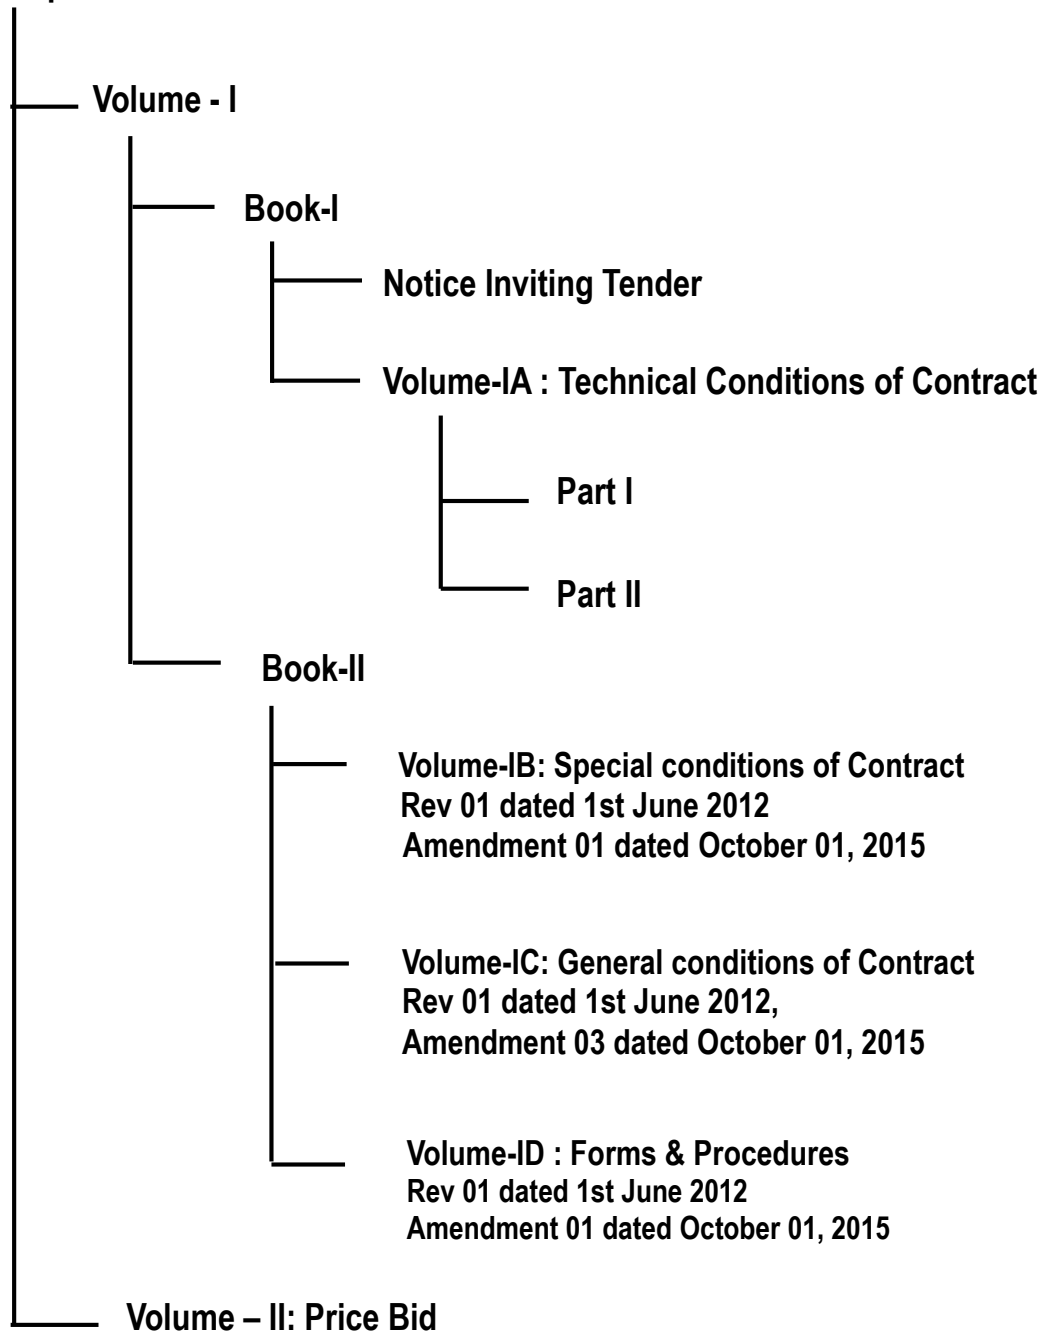

PRICE BID

CONTENTS	
Description	No. of pages
Part A : Instructions to the Bidders	01
Part B : Format to quote total amount	01
Part C: Bill of quantities with weightage for amount of each items with respect to the total quoted price	30

PART A

Instruction to Bidders:

1. The quantity indicated in the BOQ in Part C of Price Bid is approximate only and is liable for variation. Payment will be as per actual quantity executed as certified by BHEL Engineer.
2. Bidders shall quote 'Total Amount' in the "Price Bid Form" available in the E-procurement portal.
3. The above mentioned 'Total amount' is for the entire Bill of Quantity (BOQ) given in Part -C of the Price Bid.
4. BHEL has pre-fixed the weightages for the amount of individual items of Bill of Quantity with respect to the 'Total Amount' in Part C of Price Bid.
5. Based on the pre-fixed weightages, the amount for the individual items of the Bill of Quantity shall be arrived at. This amount shall be rounded off to the nearest rupee.
6. Based on the quantities of individual item and the amount arrived in Sl. No: 5 above, unit rate of individual items shall be derived. This unit rate shall be rounded off to four decimal places.
7. Bidders to note that this is an item rate contract. Payment shall be made for the actual quantities of work executed at the unit rate arrived at as per Sl No.6 above.
8. The quantities given in the contract are tentative and may change to any extent (both in plus side and minus side). The derived item rates (as mentioned above) for individual items shall remain firm irrespective of any variations in the individual quantities. No compensation becomes payable in case the variation of the final executed contract value is within the limit of Minus (-) 30% of awarded contract value.

Part B: Format to quote Total Amount

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Total Amount for the entire Bill of Quantities(BOQ) given in Part C

In Figures

In words

Note :

Bidders to quote Total Amount in this format given above, which shall be taken into account for evaluation and awarding and hence, shall be complete in all respect for the full scope defined in specification and in accordance with all terms & conditions of tender.

Date

SIGNATURE OF BIDDER WITH SEAL

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
100.0	EARTH WORK: Earth work In excavation, backfilling and disposal including all labour, equipments etc complete as per specification, drawing and as directed by engineer- in-charge for the following.	--		
101.0	Earth work in excavation in all types of soil including ash which can be excavated by any means including setting out, levelling, dewatering (but excluding special type of dewatering viz. well point method), shoring & strutting (wherever required), dressing the sides & bottom, all lifts, ramming/compacting the excavated bottom, stacking, disposal of surplus excavated materials within a lead upto 1 Km, spreading/levelling of disposed materials etc all complete for following depths below ground level.	--		
a	Depth from ground level but not exceeding 2 m	CUM	13,650	.0058659
b	Depth exceeding 2 m but not exceeding 4 m	CUM	5,850	.0031548
c	Depth exceeding 4 m but not exceeding 6 m	CUM	1,000	.0006741
103.0	Earth work in excavation in soft rock (rock without any recovery of excavated materials in the form of hard stone/boulder) including weathered rock which can be excavated by means of crow bar, pick axe, pneumatic rock breaker attachment with excavator machine etc but does not require chiselling or blasting including setting out, levelling, dewatering (wherever required), shoring & strutting (wherever required), dressing the sides & bottom, all lifts, ramming/compacting the excavated bottom, stacking, disposal of surplus excavated materials within a lead upto 1 Km, spreading / levelling of disposed materials etc all complete for following depths below ground level.	--		
a	Depth from ground level but not exceeding 2 m	CUM	8,050	.004036
b	Depth exceeding 2 m but not exceeding 4 m	CUM	3,450	.0020785
c	Depth exceeding 4 m but not exceeding 6 m	CUM	1,000	.0007204

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
104.0	Earth work in excavation upto any depth below ground level in hard rock requiring blasting (but excluding controlled blasting) including wedging, line drilling, pre shearing etc as required for grading, setting out, levelling, dewatering (wherever required), dressing the sides & bottom, all lifts, necessary licenses/statutory clearances for blasting, supply, storage & handling of blasting materials, stacking/disposal of surplus excavated material within a lead upto 1 Km, spreading / levelling of disposed materials etc all complete as per specification, drawing and as directed by the engineer-in-charge.	--		
a	Depth from ground level but not exceeding 2 m	CUM	15,600	.0152482
b	Depth exceeding 2 m but not exceeding 4 m	CUM	6,500	.0076131
105.0	Earth work in excavation in hard rock requiring controlled blasting including wedging, line drilling, pre shearing etc as required, setting out, levelling, dewatering (wherever required), shoring & strutting (wherever required), dressing the sides & bottom, all lifts, necessary licenses/statutory clearances for blasting, supply, storage & handling of blasting materials, stacking/disposal of surplus excavated material within a lead upto 1 Km, spreading / levelling of disposed materials etc all complete for following depths below ground level.	--		
a	Depth from ground level but not exceeding 2 m	CUM	2,600	.0025085
b	Depth exceeding 2 m but not exceeding 4 m	CUM	1,300	.0015062
106.0	Earth work in excavation upto any depth below ground level in hard rock requiring chiselling including wedging, line drilling, pre shearing etc as required for grading, setting out, levelling, dewatering (wherever required), dressing the sides & bottom, all lifts, stacking/disposal of surplus excavated material within a lead upto 1Km, spreading / levelling of disposed materials etc all complete as per specification, drawing and as directed by the engineer-in-charge.	--		
a	Depth from ground level but not exceeding 2 m	CUM	100	.0006396
b	Depth exceeding 2 m but not exceeding 4 m	CUM	100	.0007676

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
B110	Earth work in backfilling upto any depth below ground level around foundations, plinths, trenches, drains etc. to proper grade and level in layers not exceeding 250mm compacted thickness so as to achieve required compaction with approved excavated material from the area within plant boundary and compacted as specified, dewatering if required, sorting, spreading, breaking clods, watering, ramming/compaction by manual/mechanical means, dressing, finishing to required lines, grades and slopes, testing etc all complete as per specification, drawing and as directed by the engineer for the following. (Item includes for excavation work in soil and soft rock (i.e., excluding hard rock) for making available approved excavated material (required for back filling) from area identified within plant boundary as per direction of engineer - in - charge for all lead and lifts). Compacted backfilled volume shall be measured for payment.	--		
a	Each layer compacted so as to achieve at least 90% maximum dry density as per IS-2720 (Part-VII)	CUM	40,000	.0188748
A111	Supplying and filling sand upto any depth under floors, around foundations, plinths, surrounding pipe and in pipe beds etc. in layers not exceeding 300 mm thickness and compacted so as to achieve at least 75% relative density as per IS-2720 (Part-XIV) including spreading, watering, ramming/compaction by manual / mechanical means, dressing, royalty (if any) etc. all complete.	CUM	400	.0038188
200.0	CONCRETE WORK: Providing and placing concrete work including cost of labour, materials (unless otherwise specified in BOQ/contract specification) and equipment for handling, transportation, batching, mixing, placing, vibrating and curing (excluding cost of centering, shuttering and reinforcement) with mechanised equipments like batching plant, transit mixer, concrete pump etc. complete as per drawing, specifications and as per direction of engineer in charge for the following. (Cement supply by BHEL free of cost for incorporation in permanent work)	--		
201.0	Concrete of grade M7.5 (1 part cement, 4 part sand, 8 parts of 40 mm graded aggregate by volume) as mass filling course, lean concrete, levelling course, mud mat under and around foundations/floors, at any depth below finished floor level etc.	CUM	60	.000841

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
202.0	Concrete of grade M10 (1 part cement, 3 part sand, 6 parts of 40 mm graded aggregate by volume) as lean concrete, levelling course, mud mat under and around foundations/floors at any depth below finished floor level etc	CUM	60	.000841
A203	Concrete of grade M15 (1 part cement, 2 part sand, 4 parts of 20 mm graded aggregate by volume) as lean concrete, levelling course, mud mat under and around foundations/floors at any depth below finished floor level etc	CUM	2,300	.0322393
204.0	Concrete (20 mm graded aggregate by volume) under floors, paving, plinth protection, pipe encasing etc complete.	--		
b	M 20 Grade	CUM	250	.0035664
205.0	Providing and laying Design Mix cement concrete conforming to IS:456 & IS 10262-2009 for reinforced concrete works with coarse sand and graded hard stone aggregate of 20mm nominal size in foundations/substructure, grade slab, paving, drains, under floors etc at all level below finished floor level, any shape, position or thickness etc complete including use of plasticizer/ superplasticizer conforming to IS:9103 (latest) to achieve required slump in concrete all complete as per specification & drawing for the following.	--		
a	M 25 Grade	CUM	15,400	.2370796
Ad	M 20 Grade	CUM	250	.0035043
206.0	Providing and laying Design Mix cement concrete of grade conforming to IS:456 & IS 10262-2009 for reinforced concrete works with coarse sand and graded hard stone aggregate of 20mm nominal size in superstructure at all level above finished floor level, any shape, position or thickness etc complete including use of plasticizer/ superplasticizer conforming to IS:9103 (latest) to achieve required slump in concrete all complete as per specification & drawing for the following.	--		
a	M 25 Grade	CUM	800	.0121675

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
212.0	Screed concrete conforming to IS 456 with coarse sand and graded hard stone aggregate 12.5mm/6 mm nominal size on the roof at all level or thickness, drains etc complete as per following.	--		
a	1:2:4 (1 part cement, 2 parts sand, 4 parts of aggregate by volume)	CUM	50	.0007009
213.0	Providing and laying Design Mix cement concrete as per IS:456 & IS 10262-2009 for reinforced concrete works using graded aggregate for Concrete in precast works like roof slabs/trench covers, fins, lintels, chajas, beams, columns, wall panels, facias etc.at all levels in all kinds of work including formwork/moulds, curing, rendering the top exposed surface with cement sand mortar (1:3), handling, storing, transpoting, all leads, erection without damage, setting in position with cement sand mortar (1:3), filling the gaps between adjacent precast units with M30 grade concrete or cement sand mortar (1:3) and including making of holes for bolts for fixing, welding etc.complete with graded aggregate (20/12.5/10 mm) and as per specification and drawing for following grades.	--		
b	M30	CUM	100	.0024676
215.0	Dismantling concrete work for all types of structures at all levels including stacking of servicable material to a lead of 500 m and disposal of unservicable material upto a lead of 2 km, cutting of reinforcement, labour, equipment, safety precautions etc all complete as per drawings, specification and instructions of engineer in charge.	--		
a	Plain cement concrete of all grades	CUM	10	.000042
b	Reinforced cement concrete of all grades	CUM	10	.0000639
300.0	FORMWORK: Providing, fixing and removing formwork at all elevations for all structures, as per specifications and including all labour, material, scaffoldings and centering etc. complete as per drawing, specifications and as per direction of engineer in charge for the following.	--		

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
301.0	Fairface form work with good quality water proof ply wood of minimum 12mm thickness and smooth surface below finished ground floor level for foundations, footings, base of columns, walls, columns, pilasters, beams, mass concrete, trenches etc.including chamfering of edges as per drawing, specification and instruction of engineer in charge.	SQM	38,000	.084052
302.0	Fairface form work with good quality water proof ply wood of minimum 12mm thickness and smooth surface above finished ground floor level for columns, beams, suspended floors, roofs, lintels, cantilevers, staircases, landings, balconies, etc. including chamfering of edges as per drawing.for all heights as per specification, drawing and instruction of engineer in charge.	SQM	5,800	.015297
400.0	REINFORCEMENT WORK : Reinforcement work including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling etc at all level as per specification, drawings and as directed by engineer - in - charge.	--		
402.0	Providing, straightening, cutting, bending, placing in position at all level, binding in position of steel reinforcements of TMT steel of grade Fe-500D or 500EQR confirming to IS:1786 including cost of reinforcement steel, binding wire, labour, scaffolding, transportation to & from stores etc complete all as per specifications, drawings and as directed by Engineer.	MT	100	.0230981
403.0	Transportation, straightening, cutting, bending, placing in position at all level, binding in position of steel reinforcements of TMT steel of grade Fe-500D or 500EQR confirming to IS:1786 including cost of binding wire, labour, scaffolding, transportation to & from stores etc complete all as per specifications, drawings and as directed by Engineer. (BHEL to supply steel free of cost)	MT	1,200	.0666753

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works

at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
405.0	Providing & fixing of Rebar in existing concrete surface by inserting reinforcement bar with Epoxy based suitable bonding compound of Hilti or equivalent make (HIT-RE-500 of Hilti or equivalent make) for interconnection of new R.C. structure with existing R.C. structure. Depth of drilled hole should be suitable to develop maximum recommended strength as per approved manufacturers recommendation. This item includes supply of all materials including bonding chemicals, T&P required to execute the work, cost of all labour, transportation of chemical, staging to reach work place etc. all complete as directed by Engineer - in - Charge. Random Pull out non destructive test as directed by engineer shall be conducted to ensure strength of bond and same is included in this item. Reinforcement bar shall be paid separately under item no. 402, 403, 404 as applicable.	--		
a	12mm Reinforcement bar	Nos.	5	.0000079
b	16mm Reinforcement bar	Nos.	5	.0000123
c	20mm Reinforcement bar	Nos.	5	.0000172
500.0	Roof Treatment works: Roof treatment works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, curing, sampling, testing etc at all level as per specification, drawings and as directed by engineer - in - charge.	--		
504.0	Providing and laying rigid insulation (expanded polystyrene blocks) as per relevant IS Code in suitable panels over roofs followed by a layer of 15 mm thick cement sand plaster 1:4 (1 cement: 4 coarse sand) and providing of expansion joint at intervals and filling with sealant in both directions as per the recommendation of manufacturer. The insulating properties shall be such that the thermal conductivity shall not exceed 0.026 Kcal m/m deg C. The block shall be strong enough to withstand without deformation the workload and standard loads expected on the roof. Cost shall include making of fillets, cleaning & preparation of surface, expansion joints at suitable intervals etc all complete for following.	--		
b	50 mm thickness of rigid insulation (expanded polystyrene blocks)	SQM	1,300	.0013583

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
B506	Providing and applying a separation layer of non-woven polypropylene geo-textile membrane of 120 gsm for water proofing as per technical specification.	SQM	1,300	.000241
C506	Providing and applying 4 mm thick APP modified Bituminous Polyester membrane for waterproofing manufactured from a rich mixture of bitumen and selected polymers blended together to obtain excellent heat resistant flexibility, UV resistance etc. Modified bitumen then coated onto a dimensionally stable carrier to obtain excellent tensile strength, tear and puncture resistance etc complete as per technical specification.	SQM	1,300	.0024209
C510	Providing and laying pressed precast concrete tiles of 20 mm thickness and size 300x300/600x600 mm conforming to IS 13801 with 15 mm thick 1:4 cement mortar over the top most layer of roofing treatment with fine joints including sealing of joints (silicon/elastomeric sealant) etc all complete. (Water proofing paid elsewhere)	SQM	1,300	.0025085
511.0	Providing and applying two coats of bitumen grade 85/25 as per IS 702 (@ 1.7kg/sqm)with 1% antistripping compound conforming to IS 6241 in foundation, wall, column etc on concrete surfaces exposed to soil / ash including surface preparation etc. all complete.	SQM	5,500	.0027112
600.0	JOINTS AND FILLERS: Joints & fillers including all labour, material, equipment, transportation, handling etc at all level as per specification, drawings and as directed by engineer - in - charge.	--		
603.0	Providing and applying polysulphide based sealant conforming to IS:12118 in joints in concrete including cleaning of joints, raking out groove, application of primer, scaffolding etc. all complete for following size grooves:	--		
c	25mmX25mm	RM	10	.0000454
604.0	Supplying and filling in position hot applied bitumin sealing compund (Grade A) confirming to IS 1834 including cleaning, mixing, heating, pouring/injecting sealing compound in gaps in joints including application of primer etc. all complete.	--		
b	12mm X 25mm	RM	10	.0000015
610.0	Providing and fixing PVC water stops in joints conforming to IS 12200 & IS 15058 all complete for the following: (Bulb or Kicker type)	--		

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
b	230 mm wide and 8 mm thick	RM	500	.0004466
700.0	MS EMBEDMENTS: Embedments including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		
701.0	Supply, fabricating and fixing of mild steel embedments, inserts, pipe sleeves, angle pieces, rungs of various diameters, plates of dimensions as required etc. including welding, bolting, cutting, drilling, scaffolding, setting etc. all complete.	MT	5	.0014978
702.0	Supply, Fabrication, transportation, delivery at site and erection, installation and alignment of mild steel foundation bolt assembly conforming to IS:2062 and grade 1 of IS:432 in concrete along with nuts, lock nuts (as per IS:1363, 1364 and IS:3138), washers, anchor plates, stiffner plates, protective tape, pipe sleeves, templates etc. including welding, cutting, grinding, threading, drilling etc. all complete.	MT	115	.0427958
TBG702	Extra above over item ST no 702 for providing galvanised bolts (Mass of zinc coating = 610gms/sqm), nuts & washer .	MT	115	.0109524
703.0	Same as above items 701 & 702 with BHEL supplied material free of cost including loading, transportation, unloading etc. all complete from BHEL store to plant site.	--		
A	Mild steel embedments, inserts, pipe sleeves, angle pieces, rungs of various diameters, plates of dimensions as required etc.	MT	52	.0047716
707.0	Providing, laying and fixing rails(52kg/rm) and guide rails in concrete for transformer, rail track including cutting of rails, joining of rails, anchoring lugs etc all complete.	MT	5	.0011898
800.0	GROUTING: Grouting including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, roughening surface, cleaning, ramming, curing etc. at all level , drawings and as directed by engineer - in - charge.	--		

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
803.0	Providing & grouting of pocket holes, pipe sleeves and under base plate of structural steel work/ machinery/ pipe supporting structures including roughening of surface, cleaning, ramming, curing etc. all complete with mix 1:1:2 (1 cement : 1 coarse sand : 2 aggregate of 6 mm down graded stonechips) using non shrink admixture as per specification, drawing and direction of engineer-in-charge. (Cost of all material and cleaning the pocket by compressed air shall be in the scope of the contractor).	CUM	5	.0003805
804.0	Providing & grouting of pocket holes, pipe sleeves and under base plates of structural steel work/ machinery/ pipe supporting structures including roughening of surface, cleaning, ramming, curing etc. all complete with ConbextraGP-1 or equivalent as per specification, drawing and direction of engineer-in-charge. (Cost of all material and cleaning of the pockets by compressed air shall be in the scope of the contractor).	CUM	50	.0090348
805.0	Providing & grouting of pocket holes, pipe sleeves and under base plates of structural steel work/ machinery/ pipe supporting structures including roughening of surface, cleaning, ramming, curing, etc. all complete with Conbextra GP-2 or equivalent as per specification, drawing and direction of engineer-in-charge.(Cost of all material and cleaning of the pockets by compressed air shall be in the scope of the contractor).	CUM	10	.0029882
900.0	DOORS & WINDOWS: Doors, windows, ventilators, louvers, roof ventilators, rolling shutters, partitions including all labour, material (unless otherwise specified in BOQ/contract specification), equipments, transportation, handling, preparation of working drawings etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		
901.0	Providing and fixing wooden frame conforming to IS 4021 made of best quality seasoned CP teakwood free from large or loose knots, cracks or other defects including sand paper smoothening, hold fasts, beading, primer and finish painting / polishing etc. all complete with proper wood joinery, accurately set to required lines or levels and rigidly secured in place. (Finish painting / polishing paid separately)	CUM	1	.0005452

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
902.0	Providing and fixing teak wood frame panel door shutter as per IS 1003 with 35 mm x 150 mm vertical rail & 35mm x 125 mm horizontal rail and 12 mm thick interlocked panels of teakwood with proper wood joinery including beading, preparation of working drawings, godrej or equivalent make mortice lock with handles on both sides, approved ISI mark anodised fittings like door stopper, 300mm long tower bolts, 16x300mm long aldrops, 125mm long handles on both sides etc. butt hinges, sliding bolt, knobs, (all fitting shall be anodised aluminium color dyed), screws, primer and finish painting / polishing etc. all complete. (Finish painting / polishing paid separately)	SQM	10	.0001371
A907	Providing and fixing fire proof steel doors (single or double shutter) with panic devices and vision panel shall be 46mm thk flush design comprising of two outer sheets of 1.2 mm (18 gauge) minimum thick galvanised steel sheet rigidly connected and reinforced inside with continuous vertical 20 gauge stiffeners, spot welded in position at not more than 150mm on centers including all fittings, shop & finish painting with approved post office/signal red color fire resistant paint and mineral wool insulation (64 kg/cum density), vision lite etc. complete and shall be fire proof as per IS:3614, TAC requirements and as per specification. Minimum ratings shall be 2 Hrs.	SQM	50	.0017447
908.0	Providing and fixing steel windows/ventilator with steel sections as per IS:1038, IS:1361 & IS:7452 latest revision including all fittings, metal beadings, hold fasts, shop and final painting, glazing etc. all complete. (Glazing shall be paid separately)	--		
a	Openable type	SQM	10	.0000746
b	fixed type	SQM	10	.0000481
A908	Providing and fixing M.S. grills in windows/ventilator as per approved design for security purpose made of M.S. Flats / M.S. square bar of approved design shall be provided to suit security requirements.	KG	100	.0000695
B908	Providing and fixing anodised aluminium Grills in windows/ventilator of approved design.	KG	500	.0008911

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works

at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
A909	Providing and fixing anodised aluminium work of Jindal, Hindalco or other equivalent approved make for door/window frames, door/window shutters, ventilators, partitions, railing etc. with extruded standard tubular and other sections including all fittings & fixtures and accessories of approved make conforming to IS733 and IS1285, anodised and electro color dyed to required shade according to IS 1868 (minimum anodic coating of grade AC15), fixed with rawl plugs, expansion fasteners, SS screws or with fixing clips, including necessary filling of gaps at junctions, at top, bottom and sides with required PVC/neoprene felt for bi-mettalic protection etc.including preperation of working drawings, aluminium cleat angle, aluminium snap-on-beading for glazing/panelling, stair case tread nosing, with all fittings and fixtures (like tower bolts, handles, door stopper with rubber shoes, 'L' drops, stays, floor springs, hydraulic door closures etc. as applicable), CP brass/stainless steel screws, providing and fixing hinges/pivots, and making provision for fixing of fitting wherever required including cost of PVC/neoprene gasket, all complete as per drawing, specification and instructions of engineer in charge (Glazing and panelling shall be paid seperately).Weight of aluminium section only shall be measured.	KG	2,500	.0043079
A912	Providing and fixing pressed steel door frames. Door frame shall be Single rebate profile of size 100 x 57 mm made out of 1.20 mm thick galvanised steel sheet (18 gauge) reinforced, drilled and tapped for hinges and locks bolts strikes, hold fasts adjustable floor anchors, floor tiles/weather bars, paintings etc all complete as per specifications.	KG	500	.0002675
913.0	Providing and fixing in position rolling shutter of hot rolled double dipped galvanised steel lath section of 18 SWG tested mild steel strips at 75mm rolling centres interlocked together through their entire length and jointed together at the end by end locks mounted on specially designed pipe shaft with brackets, side guides and arrangements for inside and outside locking with push and pull operation including wire springs, top cover, primer & shop coats of approved enamel paint etc, all complete as per IS 6248 and specification of approved make of following types: The bottom lath shall be coupled to a lock plate fabricated from 3mm thick galvanised steel plate and securely rivetted with stiffening angles.(partly coiled and lath/full lath).	--		
b	Mechanically Operated	SQM	10	.000112

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
A914	Providing and fixing Solid core PVC doors (25 thk double skin) with PVC frame of sintex or equivalent make including all fitting & fixtures as per specification, drawing and instructions of engineer in charge.	SQM	15	.0001494
915.0	Providing, fixing and fitting of glazing of first grade class in steel/aluminium/wooden frames, where ever required, cleaning after fixing including hardware, gaskets, clips, beadings etc. all complete.	--		
b	4 mm thick clear float glass	SQM	50	.0002621
f	4 mm thick ground glass	SQM	50	.0003132
i	Two nos. 6 mm thick clear toughened float glass hermetically sealed and separated by 12 mm thick air gap for thermal insulation (only single elevation area to be measured)	SQM	100	.0013465
A915 m	6 mm thick clear float glass with itching	SQM	50	.0002979
916.0	Supplying and fixing weather stripping of approved make and quality to doors as per instructions of engineer in charge and specification complete.	RM	200	.0001525
1000.0	BRICKWORK: Brickwork masonry including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, scaffolding etc. at all levels as per specification, drawings and as directed by engineer - in - charge. (Cement supply by BHEL free of cost for incorporation in permanent work)	--		
1002.0	Providing brick work in cement mortar 1:6 (1 cement 6 coarse sand) in walls, chambers etc. in thickness 230mm at all heights, places and position above plinth including raking out joints, curing, scaffolding etc complete excluding plastering and painting.	--		
a	Using fly ash lime bricks confirming to IS 12894 with crushing strength of 75 kg/cm2(including cost of cement for brick making)	CUM	700	.0198097
c	Using burnt clay bricks of class designation 7.5 of nominal dimension	CUM	100	.00283

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works

at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
1003.0	Providing brick work in cement mortar 1:4 (1 cement 4 coarse sand) in partition walls, chambers etc. in thickness 115mm at all heights, places and position above or below plinth/graded level including providing two nos. 6 mm diameter MS bars at every third layer, raking out joints, curing, scaffolding etc complete excluding plastering and painting as per specification.	--		
a	Using fly ash lime bricks confirming to IS 12894 with crushing strength of 75 kg/cm2(including cost of cement for brick making)	SQM	200	.0006935
c	Using burnt clay bricks of class designation 7.5 of nominal dimension	SQM	10	.0000347
1005.0	Breaking of existing brick work at all levels including plastering, removing the rubbish up to a distance of 500 m including transportation, loading, unloading etc. all complete as directed by the engineer.	CUM	10	.0000614
1011.0	Providing and filling brick bats in soak pits all complete.	CUM	10	.0000405
1100.0	DAMP PROOF COURSE: Damp proof course including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, shuttering, centering, curing etc at all level as per specification, drawings and as directed by engineer - in - charge. (Cement supply by BHEL free of cost for incorporation in permanent work)	--		
1101.0	Providing Damp Proof Course of following thickness with 1:1.5:3 concrete (10mm and down graded aggregate) with 2% of approved admixture of water proofing compound all complete. Two layers of hot bitumen coating 85/25 grade as per IS:702 @ 1.7Kg./sqm shall be applied one before & one after the DPC.	--		
a	40mm thick	SQM	100	.0001036
1200.0	PLASTERING: Cement mortar plaster including making grooves wherever required including all labour, material (unless otherwise specified in BOQ/contract specification), scaffolding, curing etc at all level as per specification, drawings and as directed by engineer - in - charge. (Cement supply by BHEL free of cost for incorporation in permanent work)	--		

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
A1201	Providing 20mm thick plaster in two layers outside the building/rough surface of internal wall in cement mortar 1:4 on walls, finished to a smooth finish including providing 3mmx3mm size grooves at junctions of two dissimilar materials all complete.The two layer include 1:4 cement sand mortar 12mm thick first layer and 1:3 cement sand mortar with 8mm.	SQM	1,500	.0026606
A 1202	Providing 12mm thick plaster inside the building/boundary wall in cement mortar 1:4 on walls finished to a smooth finish as per specification all complete.	SQM	4,000	.0028481
1204.0	Providing 6mm thick plaster on ceiling in cement mortar 1:4 finished to a smooth all complete.	SQM	1,200	.0008089
A1210	Providing drip coarse on plastered surface at all elevations for all type of work such as chajjas, parapet, projections etc. including scaffolding, finishing etc. complete with all labour, tools and plants as per specification, drawing and instructions of engineer in charge.	RM	100	.0000131
1300.0	FINISHES TO CONCRETE / PLASTERED SURFACES: Finishes, painting to concrete, plastered surfaces including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, surface preparation, scaffolding etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		
A1304	Two or more coats of acrylic distemper of approved brand and manufacture to give an even shade including a priming coat with distemper primer and 3 mm thick white cement putty punning on walls and ceiling (Birla White/ JK White or Similar approved) including preparation of surface, staging, etc. to achieve a smooth even surface all complete as per specification and as directed by Engineer	SQM	650	.0004519
1305.0	Providing and applying two or more coats of acrylic emulsion paint as per IS 5411 of approved brand, shade and manufacture to give smooth, hard, durable & glossy finish over a coat of primer over prepared plaster surface as per manufacturers guideline.	SQM	2,000	.0009016
A1307	Providing and applying ready made Acid/Alkali resistant Epoxy Paint over areas other than steel structure with suitable pigments of approved shade as per manufacturers specification and direction of Engineer.	SQM	400	.0004685

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works

at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
A1311	Two or more coats of synthetic enamel paint of approved make made from synthetic resins and drying oil with rutile titanium dioxide and other selected pigments to give smooth, hard, durable & glossy finish to all interior and exterior surfaces including base preparation, primer etc. complete as per manufacturers specifications.	SQM	650	.0001835
A1317	Providing and applying 3 mm thick white cement putty punning (Birla White or JK White or Similar approved) on walls and ceiling including preparation of surface, staging, etc to achieve a smooth even surface all complete as per specification and as directed by engineer.	SQM	3,000	.0011375
A1319	Providing and applying two or more coats of waterproof external quality acrylic based emulsion paint of approved brand and manufacturer as per approved shade, over one or more coat of primer after necessary cleaning/ washing, preparing the surface using coir brush/ wire brush, sand paper, including filling of cracks with putty wherever required etc. all complete to give smooth, hard, durable & glossy finish over a coat of primer over prepared plaster surface as per manufacturers guidelines. The final finished coating shall be fungus resistant, UV resistant, water repellent and extremely durable with color fastness as per specification.	SQM	1,300	.0006627
1400.0	FLOORING AND SKIRTING: Flooring and skirting at all level including base layer, labour, material (unless otherwise specified in BOQ/contract specification), equipments, transportation, handling, curing, polishing etc. at all level as per specification, drawings and as directed by engineer - in - charge. (Cement supply by BHEL free of cost for incorporation in permanent work)	--		
A1401	Providing and laying 50 mm thick heavy duty cement concrete in flooring with metallic hardener pigmented topping 12mm thick uniform graded treated iron particles in flooring. Under layer of 38mm thick cement concrete mix 1:2:4 (1 cement: 2 sand : 4 stone aggregates 12.5mm well graded) and top layer of 12mm thick metallic concrete of mix 1:2 (1 cement hardner mix with approved quality metallic hardening compound :2 stone aggregate 6mm nominal size) by volume including cement slurry, rounding off edges, glass strips etc. all complete. (Quoted item rate shall be inclusive of providing glass joint strips)	SQM	1,200	.0024824

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
1406.0	Providing and laying polished Kota stone 18mm to 20mm thk in flooring. Under bed shall average 30mm thk of 1 cement : 2 sand : 4 stone aggregates by volume and brought to proper level. The kota stone slabs/tiles laid over under bed, pressed and tapped down with wooden mallet to the proper level, lifted and pressed again with thick cement slurry @4.4kg/sqm spread over the surface with fine joint finished including pigments, curing, grinding, granite polishing etc. all complete.	SQM	250	.0015641
1408.0	Providing polished Kota stone 18mm to 20mm thk in skirting projecting 6mm from adjacent plaster minimum 12 mm thick cement mortar bedding of 1:3 (1 cement : 3 sand) with thick cement slurry @4.4kg/sqm spread over the surface with fine joint finished including cutting brickwall upto the required depth, edging, finishing etc. all complete.	SQM	200	.0010634
A1418	Providing and laying non-skid, full body vitrified, 10 mm thick non-porous, homogenous, abrasion resistant, floor tiles of 1st quality dual charged similar to MARBONITE, FERRASTONE of BOSS Profile Ltd, RESTILE, ENDURA of H & R Jonson (India) Pvt. Ltd of size minimum 600 mm x 600 mm of approved colour in flooring and shall be laid over minimum 30mm thick underbed of 1 part cement and 3 parts coarse sand by weight mixed with sufficient water, complete as per specification.	--		
a	400X400 mm	SQM	50	.0002711
b	600X600 mm	SQM	700	.0038222
B1418	Providing and laying non-skid, full body vitrified, 10 mm thick non-porous, homogenous, abrasion resistant, floor tiles of 1st quality dual charged similar to MARBONITE, FERRASTONE of BOSS Profile Ltd, RESTILE, ENDURA of H & R Jonson (India) Pvt. Ltd of approved colour in skirting and shall be laid over cement mortar of 1 part cement and 3 parts coarse sand by weight mixed with sufficient water, complete as per specification.	SQM	150	.000843
1423.0	Providing & fixing Acid / Alkali resistant (Chemical resistant) tiles confirming to IS:4457 in flooring/Dado bedded and jointed with epoxy mortar all complete for following thicknesses. The tiles should be abrasion resistant & durable.	--		
a	20mm thick	SQM	300	.002313

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
A1425	Providing and laying polished Marble slabs (Aranga white and Abu green marble or Baroda green & Jaisalmer yellow combination or equivalent approved shade/color/design) 18 mm thk in staircase landing/skirting and corridors over minimum 20 mm thick underbed of 1 cement : 2 sand : 4 stone aggregates by volume mixed with sufficient water to form a stiff workable mass. The marble slabs shall be laid over under-bed, pressed and tapped down with wooden mallet to the proper level, lifted and pressed again with thick cement slurry spread over the surface with fine joint finished including moulded marble nosing, pigments, curing, grinding, making corners, granite polishing etc. complete as per spec.	SQM	100	.0009029
1427.0	Providing and fixing glazed ceramic tiles of approved color and design of size 200x300mm / 300x300mm in dado of approved size, projecting 6mm uniformly from adjacent plaster or wall finish. The mix for 20mm thick underbed plaster shall consist of 1part cement and 3 parts sand by weight. fairly moist but firm, tiles shall be pressed over under bed by applying cement slurry @ 3.3kg/sqm including pigments, curing etc all complete for following thicknesses:	--		
a	5mm thick	SQM	250	.0009174
A1430	Providing and fixing dividing strips in joints of cast in situ floorings at various elevations, finishing, all labour, material etc. complete as per drawing, specification and instructions of engineer in charge.	--		
a	Glass strips 40 mm wide and minimum 4 mm thick.	RM	500	.0000822
1500.0	ROOFING / SIDE CLADDING: Roofing / side cladding work including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, scaffolding, laps, hooks, washers, corner pieces etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		
1514.0	Providing and installing under deck insulation with resin bonded rock wool 50 mm nominal thickness conforming to IS 8183 having a density of 48kg/cum using minimum 0.05 mm thick aluminium foil on exposed surface followed by 0.56 mm dia and 25 mm mesh GI wire netting, fixed at various elevations with rawl plugs including clips.	SQM	600	.0014535

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
1600.0	FALSE CEILING: False ceiling including all labour, material (unless otherwise specified in BOQ/contract specification), equipment, transportation, handling, suspension system etc at all level as per specification, drawings and as directed by engineer - in - charge.	--		
1603.0	Providing and fixing permanently colour coated aluminium false ceiling of approved colour and Luxalon 84 C or approved equivalent with corrosion resistant aluminium alloy panels of minimum thickness 0.5mm including 50mm thick mineral wool insulation(density 48 kg/cum) conforming to IS:8183 bound in polythene bags on top of panels. Additional hangers and height adjustment clips shall be provided for return air grills, light fixtures, A.C. ducts etc all complete. Suitable M.S. channel grid with minimum MC 75 shall also be provided above the false ceiling level for movement of personnel to facilitate maintenance of lighting fixtures, AC ducts etc. (Materials for structural platform grid made up of MS Channels/ Beams / Angles shall be supplied by BHEL and shall be paid under ST No 2301)	SQM	800	.0055141
1606.0	Providing and Fixing 12mm thick Gypsum board plain/perforated false ceiling tiles(600x600mm) of India Gypsum or equivalent make in plan or elevation with aluminium grid, metal suspension system, anchor fastener adjustable hangers etc. including two or more coats of acrylic emulsion paint of approved colour to give an even shade with smooth finish all complete.as per architectural design and detail. Metal suspension system as per ASTM C-635 shall be hot dipped M.S.galvanized (grade 180 as per is :277) and nominal size of T-section shall be 24 x 38 mm or 24 x 25 mm cross runners. 24mm wide exposed flange surface shall be permanently color coated. Suspension system shall be as per manufacturer's specification. Movement platform of structural steel shall be provided if required for the movement of personnel to facilitate maintenance of lighting fixtures, AC ducts etc. The work to be complete as per specifications, drawings and direction of engineer. (Structural steel works for platform for movement is separately payable under relevant items of BOQ)	SQM	50	.0001622
1700.0	RAIN WATER DOWN TAKE PIPES: Rain water down take pipes at all level including all labour, material (unless otherwise specified in BOQ/contract specification), transportation, 2 coats of approved paint over one primary coat, fixtures, accessories etc as per specification, drawings and as directed by engineer - in - charge.	--		

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
1707.0	Providing and fixing GI down take pipes conforming to IS:1239 /IS:3589 of medium duty all complete for following diameters.	--		
b	150 mm Dia	RM	200	.0013448
1709.0	Providing and fixing HDPE down take pipes conforming to IS:4984 as per specification of following diameters.	--		
b	160 mm Dia	RM	10	.0000247
1800.0	MISCELLANEOUS: Miscellaneous works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. at all level unless otherwise specified as per specification, drawings and as directed by engineer - in - charge.	--		
TBG1801	Providing and laying stone aggregate in switch yard areas in 75mm thick layer using 20 mm aggregates size in layer I and 75mm thick layer using 40mm size aggregate in layer II making overall thickness of stone aggregate as 150mm. Before laying the stone aggregates , the yard surface shall be treated with antiweed treatment all complete as per Customer's specification and direction of Engineer in Charge. (The rate shall be inclusive of all materials ,labour,loading,unloading and surface preparation, compaction, micro grading etc. required for aggregate laying and antiweed treatment)	SQM	190,000	.2097297
1803.0	Supply and laying approved quality rounded pebbles / gravels of 40mm size in transformer yards.	CUM	200	.0019052
1807.0	Anti termite chemical treatment of soil with Chlorpyriphos/Lindane E.C. 20% with 1% concentration conforming to IS:8944 and as per IS 6313 all complete. (Plinth area of building at ground floor only shall be measured for payment).	SQM	1,300	.0006737

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
A1808	Unloading, storing and laying and welding of: (a) 40 mm dia MS Rods at a depth of 1000 mm measured from the top of Finished Ground Level and bringing out risers 300 mm above ground level to the nearest point of the equipment foundations and (b) Auxiliary Mat of 40 mm Dia MS Rods at a depth of 300 mm from top of FGL Risers shall be raised from the earthmat (at 1000 mm depth) to 300 mm above ground level to the nearest point of the equipment. This shall include all cutting, bending, welding, fixing, application of paint on cutting & welded surface, etc to the main earthmat as per specification & instruction of engineer incharge all complete (Excavation & Back filling shall be paid separately under respective item of earth work. Earthing mats/rods shall be supplied by BHEL free of cost)	MT	695	.0272696
1809.0	Construction of below ground earthing system test pits as per drawing / sketches including concreting, reinforcement, formwork, providing & fixing GI strip etc as per drawing and specification (excavation & backfilling only will be paid under applicable BOQ items).	EACH	1	.0000396
1810.0	Construction of below ground earthing system test links as per drawing/ sketches including concreting, reinforcement, formwork, providing & fixing GI strip etc as per drawing & specification (excavation & backfilling only will be paid under applicable BOQ items).	NO	1	.0000292
1811.0	Construction of below ground earthing system earth electrodes as per drawing and specification. (Excavation and backfilling only will be paid under applicable BOQ items)	NO	1	.0000075
1812.0	Construction of below ground earthing system - Earth connection and riser pig tails as per drawing and specification. (Excavation and backfilling only will be paid under applicable BOQ items& steel shall be supplied by BHEL free of cost.)	NO	1	.0000064
1813.0	Providing Earthing pit as per drawing with charcoal & salt, GI pipes, GI earth electrodes, GI wire, GI strips, brick chamber with covers including associated earthwork etc. all complete.	EACH	8	.0007251

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
B1813	Installing of 40 mm diameter Rod Electrode with test pit (Shield wire tower) as per specification and as directed by Engineer-in-charge all complete including following works: - excavation - installing the rod electrode - PCC at the bottom of the pit - Rich mix concrete for the bottom of the pit and side walls - backfilling and compaction - Casting the Test Pit with Cast Iron covers - any other work necessary to complete the work (40 mm dia MS rod will be supplied by BHEL).	Nos.	93	.0016073
C1813	Installing of 40 mm diameter Rod Electrode without test pit (LA & CVT) as per specification and as directed by Engineer-in-charge all complete including following works: - excavation/hammering of rod in earth - installing the rod electrode - backfilling and compaction - any other work necessary to complete the work (40 mm dia MS rod will be supplied by BHEL).	Nos.	150	.0002307
1823.0	Providing and laying cinder filling in the toilets,roads,etc complete as directed by engineer in charge.	CUM	10	.0000794
A1837	Supply & fixing 18G chicken wire mesh on brick/ stone masonry and RCC joints and fixed with GI type nails etc. complete	SQM	100	.000027
2000.0	FENCING AND GATES: Fencing and gates including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc at all level as per specification, drawings and as directed by engineer - in - charge.	--		

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
A2003	Supplying and erecting in position 2.4 m high PVC coated galvanised chain linked fencing of minimum 4 mm (including PVC coating) of mesh size 75mm x 75mm. The diameter of the hot dip galvanised steel wire for chain link fencing excluding PVC coating shall not be less than 2.5 mm. Concertina of height of 600 mm at top of chain link fencing shall be provided with all accessories. Concertina shall be from tensile serrated galvanised wire (HTSW) made with wire diameter of 2.5 mm which will be stretched to 6m and attached on two strands of galvanised HTSSW (high tensile spring steel wire) of 2.5mm dia by means of clips at 1m interval. These two HTSSW strands will be attached to the fence posts/ angles with 12 mm security fasteners. Cost to include for GI hook bolts, rings & washers, hot dip galvanised tension wires, 25X6 mm GI flat stretcher bar at end posts etc. all complete. (Structural post shall be separately under ST No. 2007)	RM	2,200	.0158405
2007.0	Supply and fixing of hot dip galvanised mild steel posts for fencing. Rate of zinc coating shall not be less than 710 g/m2 on steel posts.	MT	30	.0098853
2010.0	Supply, fabrication and installing in position and testing MS Gates out of channels, joists, angles, flats, plates, pipes, welded steel wire mesh & sheets including stiffeners, bracings, fabricated hinges, MS Aldrops with locking arrangement, tempered steel pivot, guide track of MS Tee, bronze aluminium ball bearing arrangements, castor wheels, paintings etc. all complete.	MT	5	.0017083
2100.0	WATER SUPPLY: Water supply work including men, material (unless otherwise specified in BOQ/contract specification), equipment etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		
2101.0	Providing and fixing in position tested heavy duty type chromium plated (CP) brass long neck bib cocks including sockets, union, nuts etc all complete - 15mm nominal bore.	NOS	5	.0000142
2102.0	Providing and fixing in position heavy duty brass stop cock of approved quality including all specials etc all complete - 15mm nominal bore.	NOS	10	.0000091
2103.0	Providing and fixing in position heavy duty brass full way valve with wheel of approved quality including all specials etc all complete for following sizes:	--		

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
a	25mm nominal bore.	NOS	2	.000003
b	50mm nominal bore.	NOS	2	.0000053
2104.0	Providing and fixing GI pipes class B medium class conforming to IS:1239 pipes shall be concealed and painted with anticorrosive paint, complete for internal works with GI sockets, unions, elbows, tees, nipples etc and clamps including cutting and making good the walls etc all complete for following sizes:	--		
a	15 mm nominal bore.	RM	40	.0000593
b	20 mm nominal bore.	RM	10	.0000164
c	25 mm nominal bore.	RM	10	.0000194
d	50 mm nominal bore.	RM	10	.0000294
2105.0	Providing and fixing GI pipes class B complete for external work with GI sockets, unions, elbows, tees, nipples etc including trenching & refilling, anti-corrosive paint etc all complete for following sizes:	--		
a	15 mm nominal bore.	RM	10	.0000112
b	20 mm nominal bore.	RM	10	.0000129
c	25 mm nominal bore.	RM	10	.0000158
d	50 mm nominal bore.	RM	10	.0000259
A2106	Providing and fixing 450mmx750mm high square edge 6mm thk float glass mirror of adequate width to match toilet layout and interior decor and as per spec	NOS	5	.0000202
2108.0	Providing and fixing 25 mm diameter stainless steel towel rails (600mm X 25mm) with C.P. mounting brackets all complete.	NOS	5	.0000127

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
2110.0	Providing and fixing C.P. Soap holder mounted with C.P. screws etc all complete.	NOS	5	.0000089
A2111	Providing and fixing stainless steel liquid soap dispenser. Dispenser shall be round and easily revolving with removable threaded nozzle and mounted on C.P. brackets etc all complete.	NOS	5	.0000122
A2112	Providing and fixing wall mounted stainless steel paper holder with suitable cover cum cutter fitted with screws etc. all complete.	NOS	5	.000007
2114.0	Providing & fixing in position P.V.C. water tank of Syntex or approved equivalent including making all necessary inlet & outlet pipes, fixture, ball cocks, valves etc all complete for following capacities. GI pipes shall be paid separately under ST No. 2105.	--		
b	1000 litres capacity	NOS	1	.0000222
A2115	Providing and fixing SS grab bars, barrier-free access and appropriate fittings and fixtures for toilets for handicapped etc. all complete.	NOS	2	.0000257
2200.0	SANITARY: Sanitary work including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		
2201.0	Supply and fixing glazed vitreous china Wash Basin of approved make conforming to IS:2556 part 4 of oval shape with R.S. or C.I. brackets painted white, 15mm chromium plated brass hot & cold faucets with nylon washers, chromium plated brass chain with rubber plug, 32mm chromium plated brass bottle trap and waste of standard pattern, 32mm dia chromium plated brass trap unions, plastic connection pipe with chromium plated nuts, fittings, cutting and making good the walls where required etc all complete.	--		
a	White	EACH	5	.0000639
2202.0	Providing and fixing approved vitreous china laboratory sink of size 600x400x200mm conforming to IS:2556 (part-5) with R.S. or C.I. brackets, chromium plated brass chain with rubber plug 40mm, 40mm CP brass waste and 40mm CP brass trap with necessary union complete including painting the fittings, cutting and making good the wall where required etc. all complete.	EACH	1	.0000099

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works

at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
ISG 2203	Providing and fixing approved stainless steel sink with integrated drainboard as per IS:13983 of size 915x460x178mm with CI brackets, stainless steel chain with rubber plug 40mm, cp brass waste trap with necessary union complete including painting the fittings, cutting and making good the wall where required etc. all complete as per spec.	EACH	1	.0000256
2204.0	Providing and fixing colour glazed vitreous china European type water closet conforming to IS:2556 with siphon, open front solid plastic seat and plastic cover, low level 12.5 litre PVC flushing cistern (same colour as WC) with valveless fittings, necessary C.P connections etc all complete.	--		
b	Wall mounted	EACH	5	.000173
2205.0	Providing and fixing colour glazed vitreous indian type Orissa pattern (580x440mm) water closet conforming to IS:2556 part 3 with all fittings including foot rests, low level 12.5 litre PVC flushing cistern with valveless fittings, necessary C.P connections etc all complete.	EACH	1	.000019
2206.0	Providing and fixing white flat back glazed vitreous china urinals of size 440x265x355 mm with photo voltaic control flushing system as per IS:2556 (part 6, section 1) with flush pipes, lead pipes, gratings, traps and necessary C.P. fittings etc. all complete.	EACH	5	.0001153
A2207	Supply, laying and jointing UPVC pipes of Type B as per IS:13592 including bends, branches and all other necessary fittings, M.S. holder bats/ clamps, cutting and making good the walls and floors, jointing, testing etc all complete for following.	--		
b	110mm dia pipes	RM	100	.0002524
2208.0	Providing, laying light duty non pressure NP3 class RCC pipes with collars jointed with stiff mixture of cement mortar 1:2 including testing of joints etc all complete for following.	--		
a	200mm dia	RM	100	.000193
b	300mm dia	RM	500	.0012618
c	450mm dia	RM	100	.0007154

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
d	600mm dia	RM	100	.0009172
e	900mm dia	RM	10	.0001431
2209.0	Providing, laying light duty non pressure NP2 class RCC pipes with collars jointed with stiff mixture of cement mortar 1:2 including testing of joints etc complete for following.	--		
a	150mm dia	RM	10	.0000141
c	300mm dia	RM	10	.0000205
d	450mm dia	RM	10	.000027
2211.0	Providing and fixing C.I Manhole heavy duty cover of size 600mmx450mm including frame from reputed manufacture etc. all complete.	EACH	5	.0000504
2213.0	Providing and fixing square mouth S.W Gully trap grade 'A' complete with CI grating, brick masonry chamber(Clay Brickwork in 1:6 mortar, 12mm plaster in 1:6 mortar & 1:2:4 Cement Concrete) and water tight CI cover with 300x300mm (inside). The weight of cover to be not less than 4.53 Kg and frame to be not less than 2.72 Kg etc all complete for following sizes:	--		
a	100x100mm P or S Type.	EACH	2	.00001
2214.0	Providing and fixing C.I. floor traps size 100 mm Inlet and 100 mm Outlet Sand Cast Iron S&S as per IS: 1729 with C.P jalli all complete.	EACH	5	.0000224
2300.0	STRUCTURAL WORKS: Structural steel works including all labour, material (unless otherwise specified in BOQ/contract specification), equipments unless otherwise specified, transportation, handling etc. at all level as per specification, drawings and as directed by engineer - in - charge.	--		

Part C : Bill of Quantities

Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works

at 5 X 800 MW Yadadri TPS

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
2301.0	Fabrication,erection and alignment of structural steel with mild steel rolled section / built up section / combination of both conforming to IS:2062, pipes conforming to IS:1161/ IS:1239, chequered plate conforming to IS: 3052, mild steel rounds/sag rods, monorails, stays, safety chains, ladders, MS grating(For hoppers) etc. in columns, beams, gantry girders, bunkers, silos, hoppers, roof trusses, portals, laced purlins, space frames, hangers, struts, monorails, galleries, stiffeners, wall beams, sheeting runners, brackets, stub columns, bracings, cleats, trestles, base plates, splice plates, chequered plate flooring, decking and seal plates, steel frame grid over false ceiling, walkway platforms, ladders, stairs, stringers, treads, landings, hand-rails etc including 2 coats of red oxide zinc-chromate primer (one coat at shop and one coat after erection), connection design & preparation of fabrication drgs, collection of steel from stores, fabrication, straightening, cutting, bending, rolling, grinding, machining, drilling, threadingwelding, electrodes and other consumables, alignment, erection bolts & nuts (weight of erection bolts, nuts and welds not payable), assembly, edge preparation, preheating (min preheat and interpass temperature of 20degree Celcius for welding over 20 mm and upto 40 mm & 66 deree Celcius for welding over 40 mm and upto 63 mm & 110 degree Celcius for thickness over 63 mm) & use of low hydrogen electrodes for welding of steel (for all thickness), post heating, testing of welders, inspection of welds, visual inspection, non destructive and special testing, rectification and correction of defective welding works, production test plate, inspection and testing, erection scheme, protection against damage in transit, stability of structures, installation of temporary structures, setting column bases, surface preparation by means of manual or mechanical power tools as per IS:1477 part 1, touch-up painting, rectification, dismantling and removal of all temporary structures (weight of temporary structures not payable), return of surplus / waste steel materials to store etc all complete. Including appointment of a seperate agency, approved by BHEL, for review and approval of fabrication drgs, in consultation with BHEL (BHEL to supply steel free of cost). Electrode E-6013 is not allowed for Fabrcaation & Erection works.	MT	15	.0015144
2320.0	Supply, fabrication and fixing of stainless steel pipe hand railing conforming to SS 409 of 32 mm/40 mm dia including transportation, loading/unloading etc. all complete..	MT	1	.0011385

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
A2322	Supply, fabrication and fixing of GI pipe hand railing (1000 mm high) of 32 mm/40 mm dia (Medium/ Heavy Grade) including transportation, loading/unloading, painting etc. all complete..	MT	1	.0003848
TBG2 333	Applying priming coat: With ready mixed red oxide zinc chromate primer of approved brand and manufacture on steel galvanised iron/ steel works	sqm	200	.000043
2400. 0	ROAD WORKS: Road works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. as per specification, drawings and as directed by engineer - in - charge.	--		
2401. 0	Preparation of sub grade by excavating earth to required depth for all types of soil/ rock, dressing to camber and consolidating the base including making good the undulation etc and disposal of surplus earth within a lead upto 1 km etc. all complete.	CUM	115	.0000189
2403. 0	Providing, stacking & laying granular morrum for shoulder including watering, compaction with road roller to required camber etc all complete.	CUM	25	.0000982
2404. 0	Providing & laying water bound macadam sub base course in layers of required thickness with crushed stone aggregates 90 to 40 mm down size (IRC 19 - grading -1), stone screening & blinding material including screening, sorting, spreading to template & consolidation with road roller including carriage, spreading & consolidation of blinding material moorum etc all complete.	CUM	50	.0003962
2405. 0	Providing & laying water bound macadam base course in layers of required thickness with stone aggregate 63mm to 40mm size(IRC 19 - grading -1), stone screening and blinding material including screening sorting, spreading to template and consolidation with road roller including carriage, spreading and consolidation of blinding material moorum etc all complete.	CUM	50	.0003962
2406. 0	Providing & Laying water bound macadam base course with stone aggregate 50mm to 20mm size stone(IRC 19 -grading -1) screening & binding material including screening, sorting, spreading to template & consolidation with road roller including carriage spreading & consolidation of blinding material moorum etc all complete.	CUM	50	.0004188

Part C : Bill of Quantities

**Tender Specification BHEL:PSSR:SCT:1893 for Switch Yard Civil works
at 5 X 800 MW Yadadri TPS**

Ref.No.	Description	Unit of Measurement	Qty.	Weightage for amount of each item (Nearest to the 7 decimal points) w.r.t the total amount
2413.0	Supplying and laying 400mmx150mmx350mm deep precast concrete kerb stone of grade M-20 with 20 mm nominal size stone aggregate and of shape as per detailed drawing including fixing with cement mortar (1:2) in 13mm thick joints, finishing of joints with neat cement paste, making drainage opening where required etc all complete.	RM	100	.0001289
2419.0	Providing and laying cement concrete of grade M30 using 20 mm nominal size stone aggregate with approved admixture (if required), provision for necessary joints including compaction, finishing to lines and grades, curing and providing & fixing forwork etc. all complete. (Excluding the cost of reinforcement and dowel bar)	CUM	100	.0015483
2421.0	Providing & laying dry lean cement concrete of grade M15 with 20 mm nominal size graded stone aggregate over a prepared sub-grade including compaction, finishing, curing etc all complete.	CUM	50	.0007009
2600.0	LEVELING & GRADING: Levelling & grading works including all labour, material (unless otherwise specified in BOQ/contract specification), equipment etc. as per specification, drawings and as directed by engineer - in - charge.	--		
C2609	Earth work in filling upto any depth below ground level for grading to proper grade and level in layers not exceeding 250mm loose thickness so as to achieve at least 95% maximum dry density (modified proctor) as per IS-2720 (Part-VIII) with selected approved soil/soft rock from compulsorily excavated earth available within a lead upto 1km and compacted as specified including re-excavation of stacked earth, all lifts, sorting, spreading, breaking clods, watering, ramming/compaction by manual/mechanical means, dressing, finishing to required lines, grades and slopes, tesing etc all complete as per specification, drawing and as directed by the engineer.	CUM	20,000	.0183693
TOTAL Weightage				1.0