

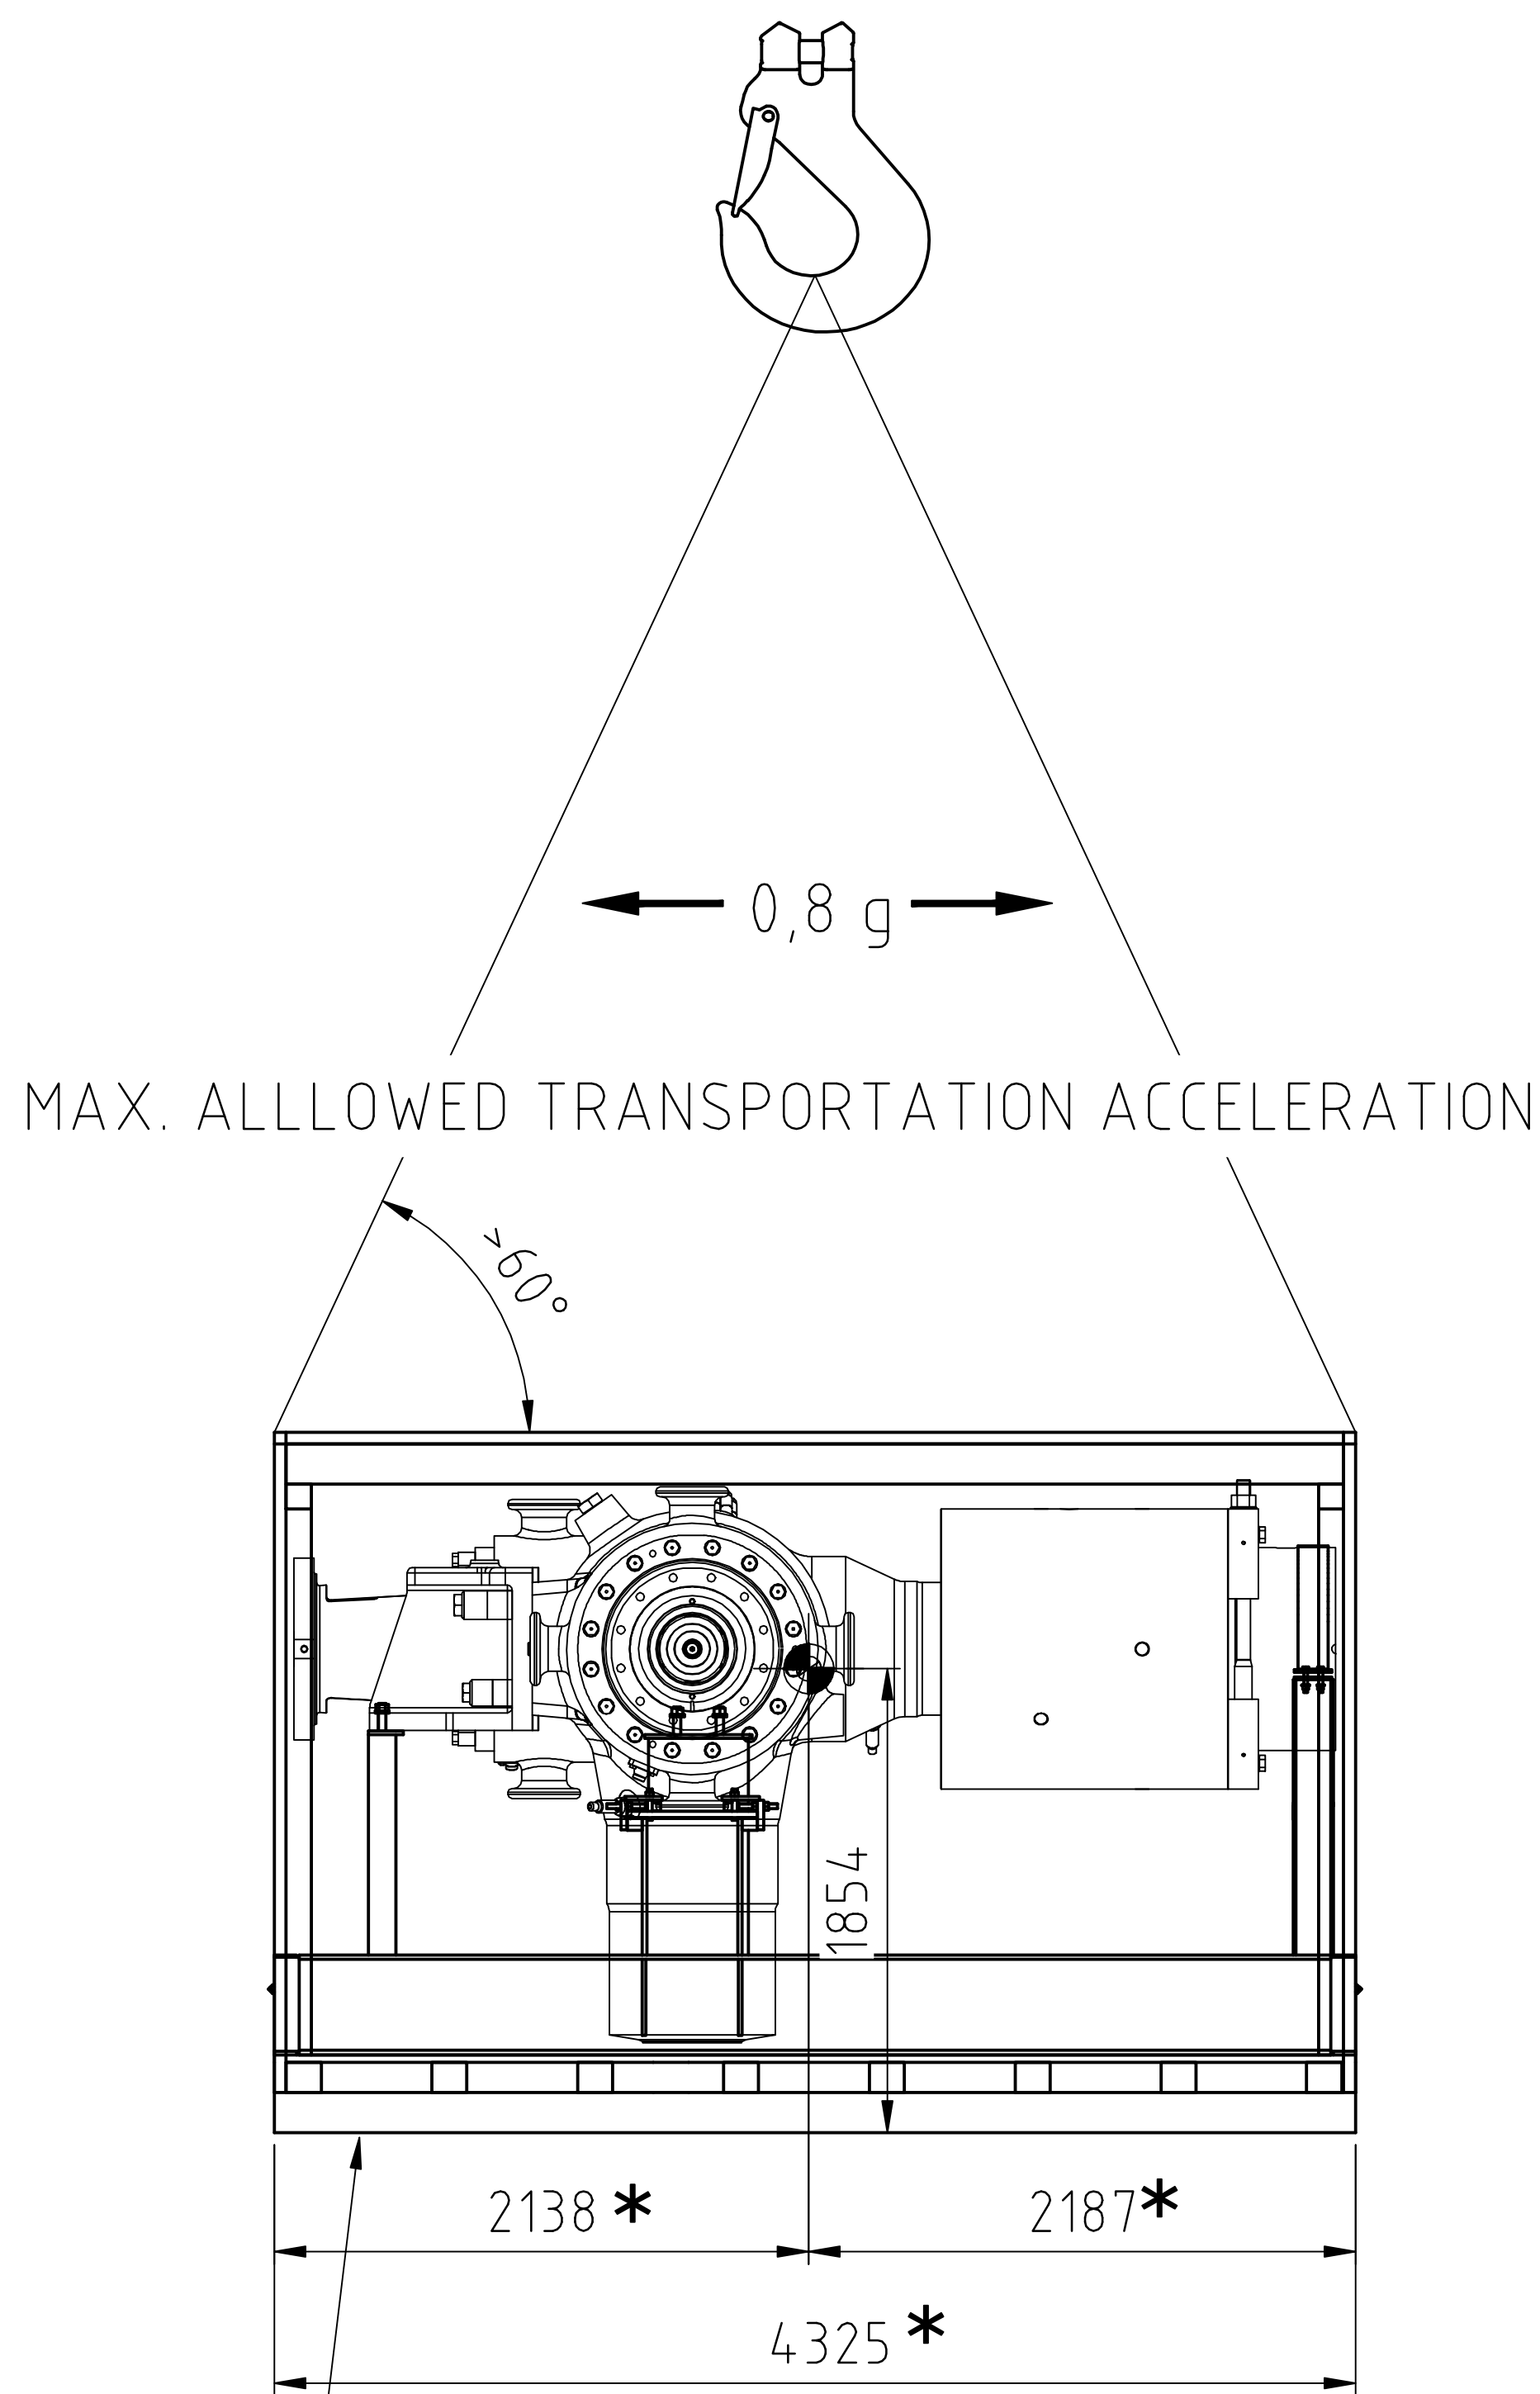
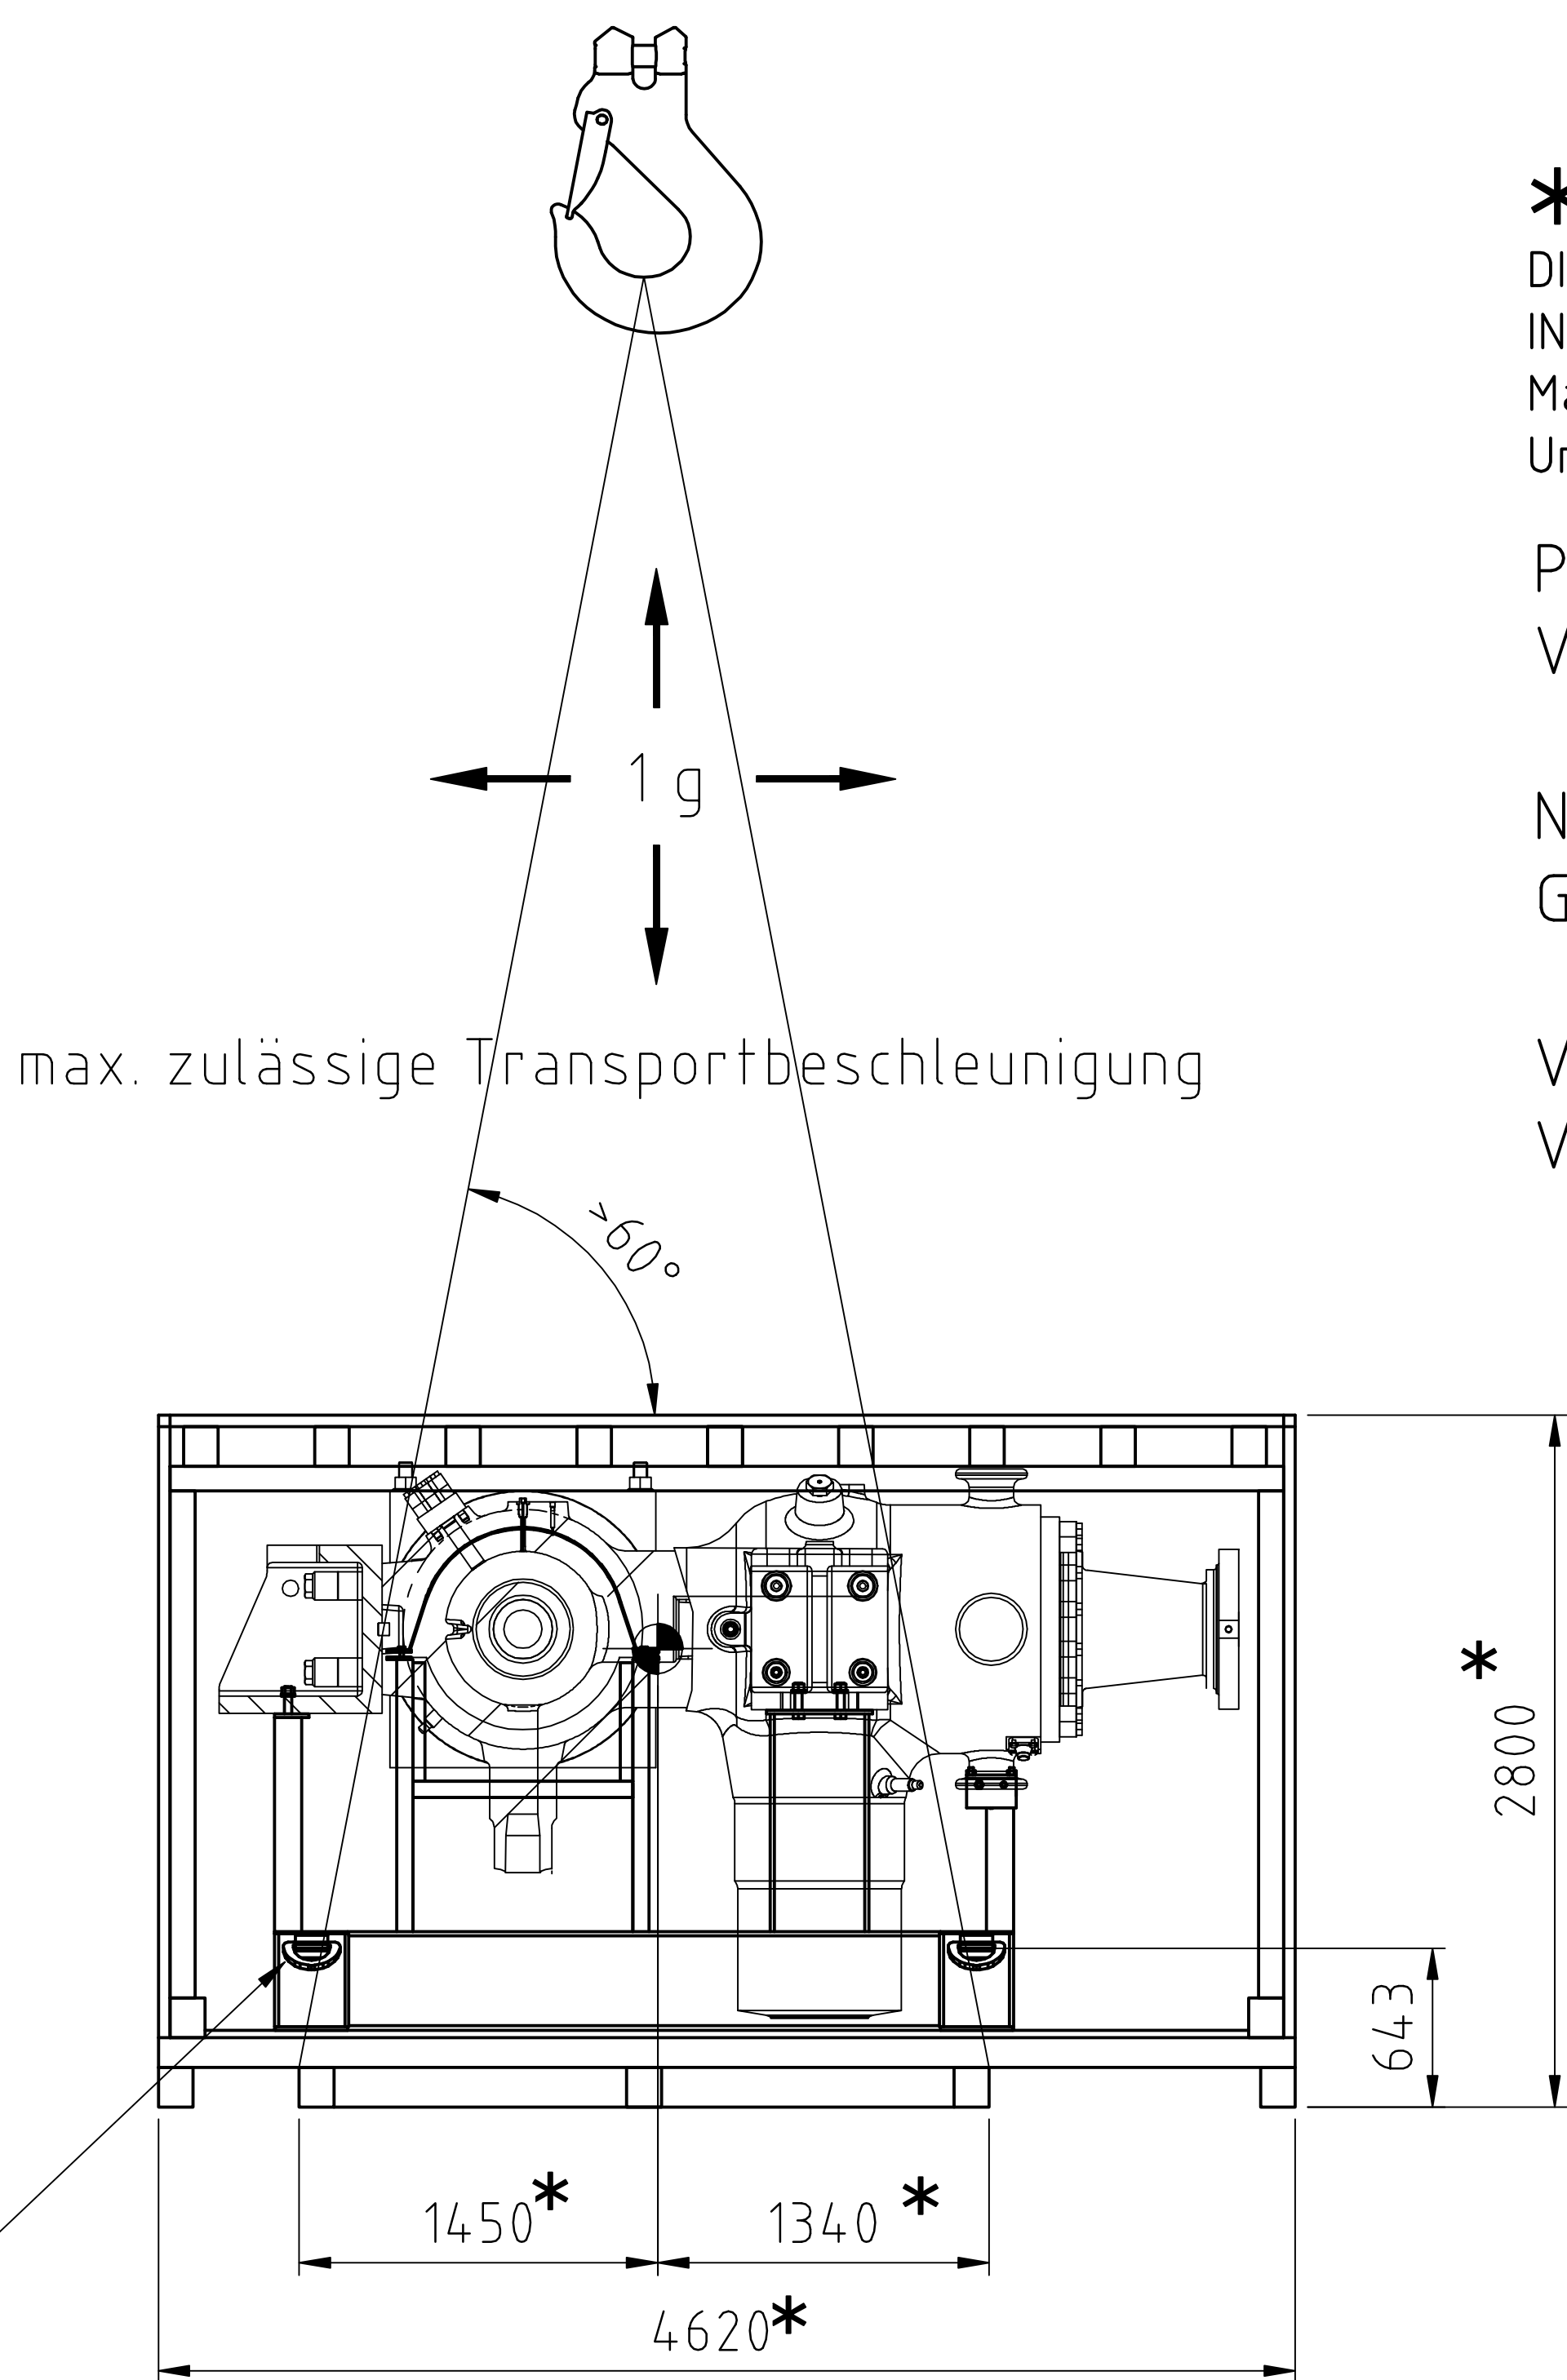


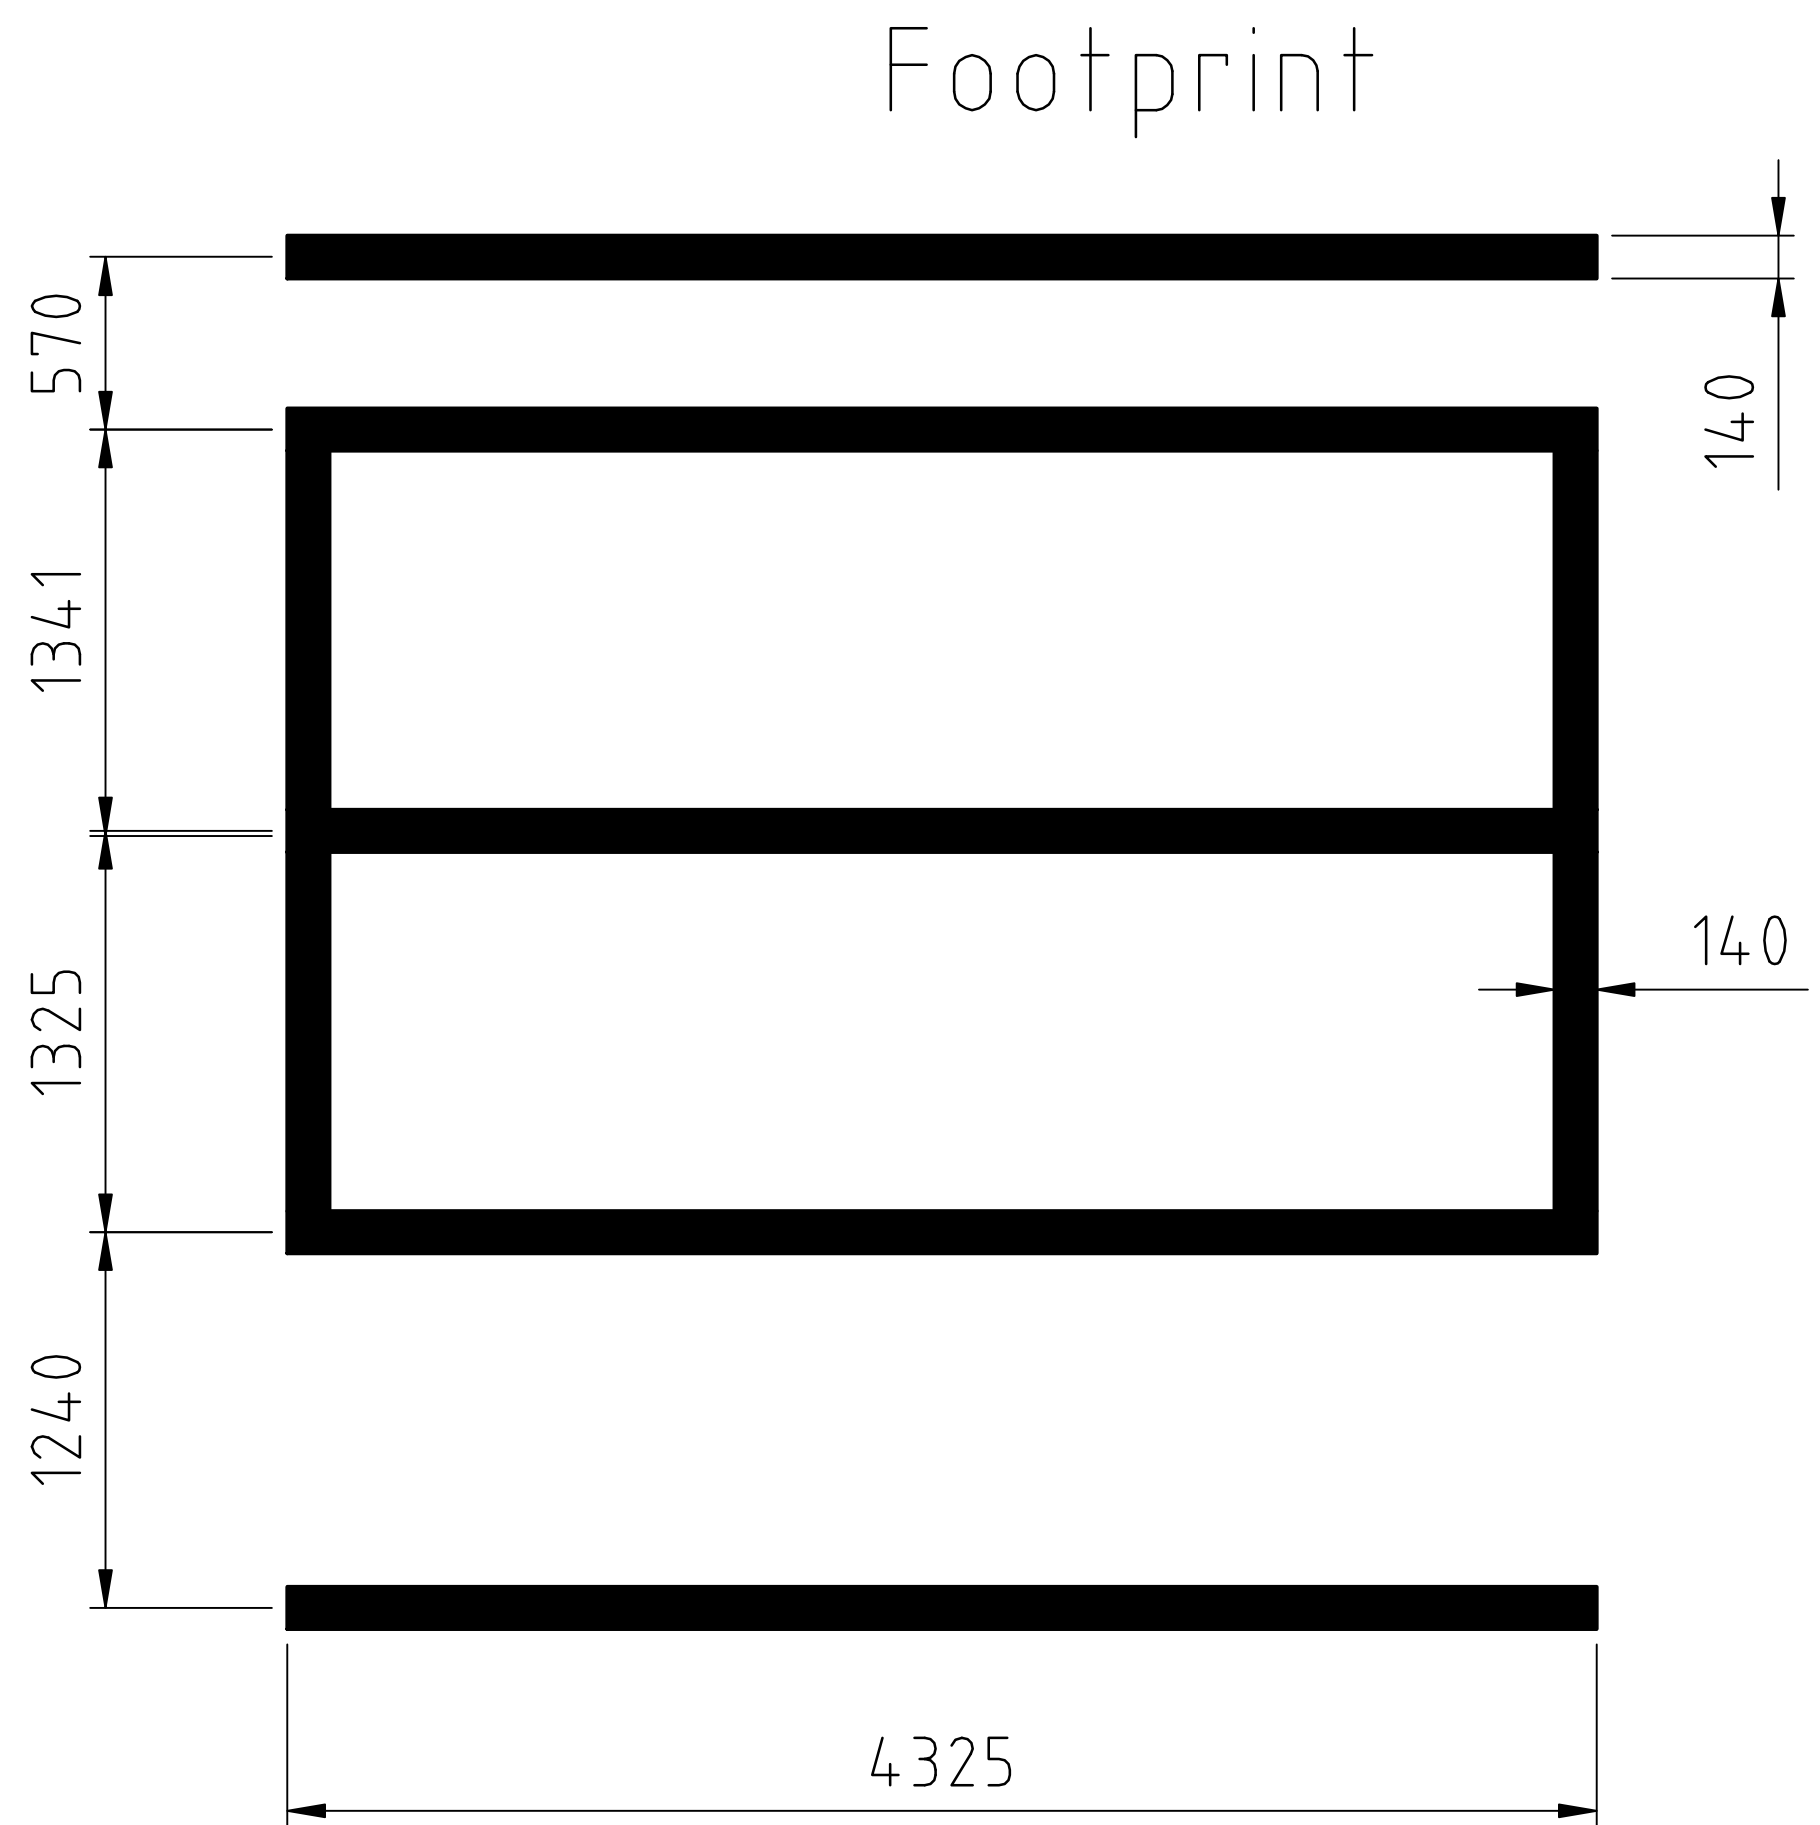

MAX. ALLOWED TRANSPORTATION ACCELERATION

ALWAYS USE ANTI SKID PADS BELOW FRAME
FRICTION FACTOR $\mu \geq 0,6$
Antirutschmatten unter Auflagefläche
benutzen $\mu \geq 0,6$

Zurtpunkt ZA-3
LASHING POINT ZA-3
SWL 245kN

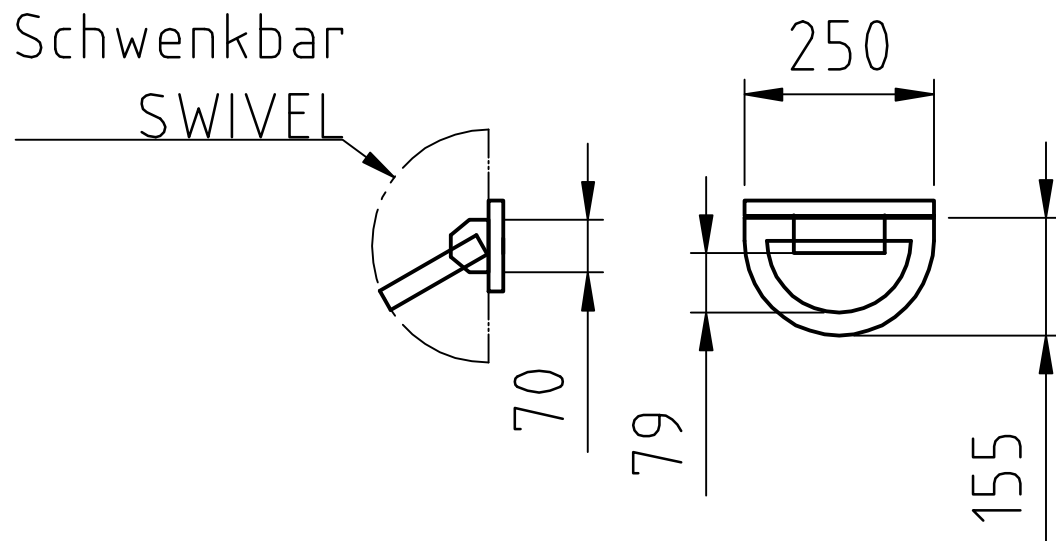


max. zulässige Transportbeschleunigung

*
DIMENSIONS CAN VARIATE UP TO 50mm BECAUSE OF
INACCURACY WHILE LOADING AND PACKING
Maße können bis zu 50mm variieren aufgrund von
Ungenauigkeiten beim Verladen und Verpacken

PACKING AND DISPATCH GUIDELINES ACC. TO TLV 0130
Versand- und Verpackungsrichtlinie nach TLV 0130

NETWEIGHT : 32,1 Mg
GROSSWEIGHT: 35 Mg

Ventil 2 spiegelbildlich verpackt /
VALVE 2 PACKING IS SPECULAR

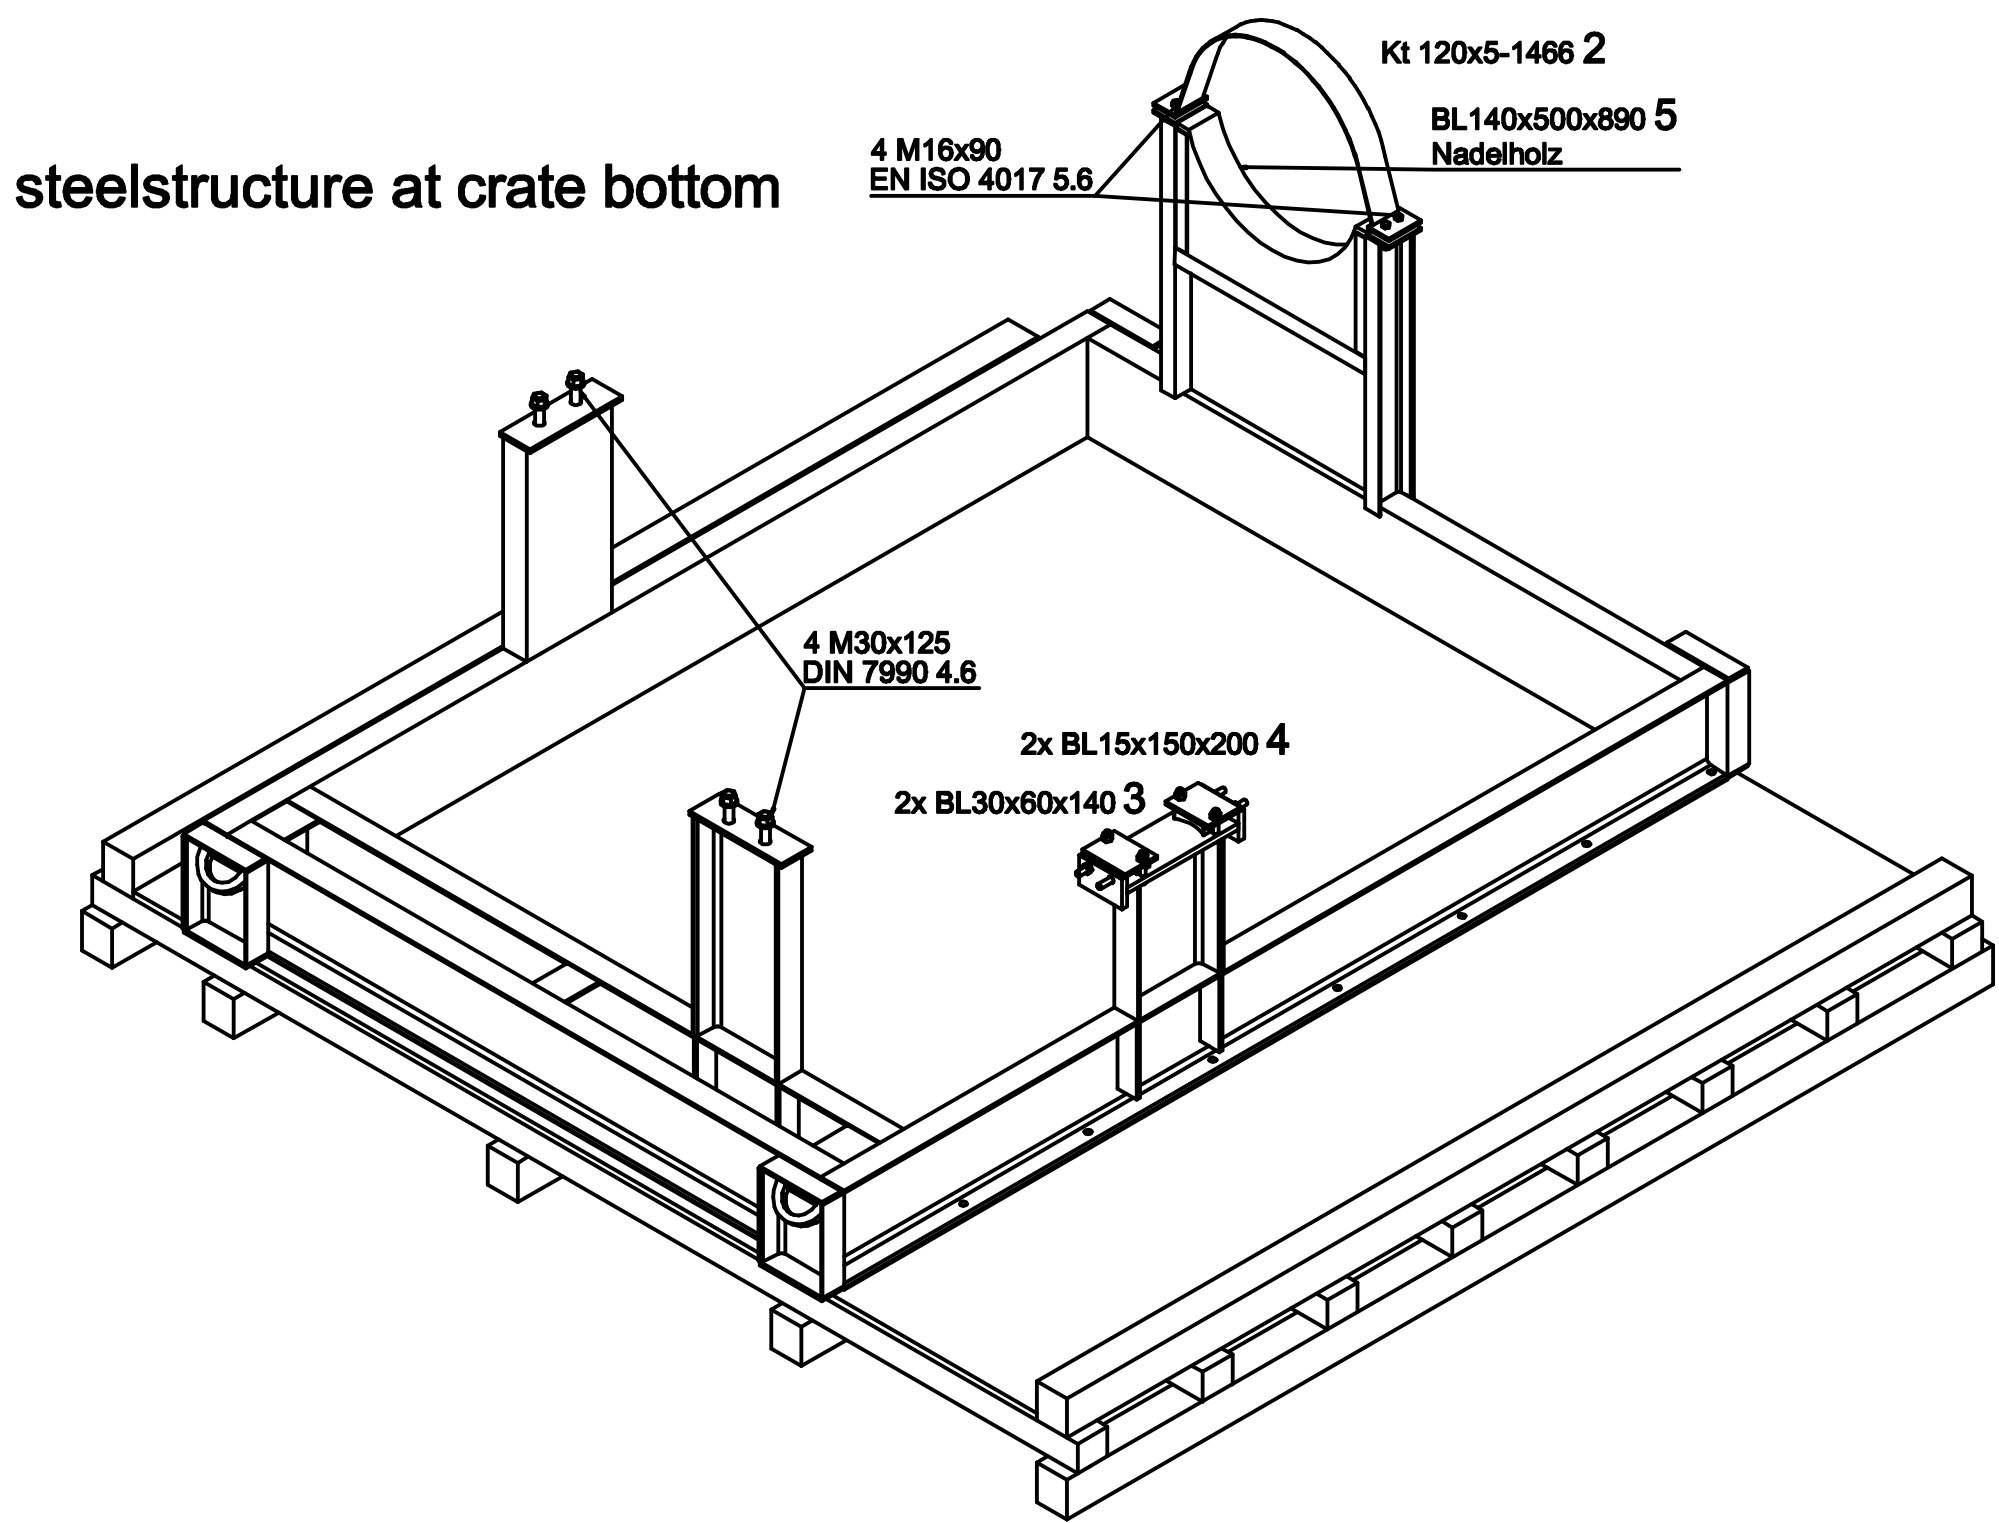

TECHNOLOGY NOT SPECIFIED IN THE CCL, AL OR ECL			
TECHNICAL CLASSIFICATION:		US-Content:	
ECONOMIES: ALN		ECL:W	
THIS DOCUMENT IS SUBJECT TO US AND/OR NATIONAL EXPORT REGULATIONS. UNAUTHORIZED DIVERSION IS PROHIBITED. IN CASES OF DOUBT CONTACT YOUR EXPORT COMPLIANCE DEPARTMENT.			
REVISION: SEE SEPARATE CID DOCUMENT			
Siemens AG Energy Sector			
WEIGHT:	SCALE: 1:1	SPEC:	KUN 35100 DCC:
ORIGINATED: 2018-05-07 Hoppe	TITLE:		
CHECKED: 2018-05-07 Dag	Transportzeichnung Ventil shipping dwg valve		
RELEASED: 2018-05-07 Hoppe	HPV250		
COPYRIGHT (C) Siemens AG 2018 ALL RIGHTS RESERVED		LANG.-DRAWING NO. / VALUE DPPPG-70161130 A-000815-MA18017100	
21		AutoCAD	
		REV.:	SHEET:
		A	1