



भारत हेवी इलेक्ट्रिकल लिमिटेड
BHARAT HEAVY ELECTRICALS LIMITED
पारेषण व्यापार अभियांत्रिकी प्रबंधन (TBEM)
नोएडा / TBG, NOIDA

DOCUMENT No.	TB-375-316-028	Rev 00	Prepared	Checked	Appd
TYPE OF DOC.	TECHNICAL SPECIFICATION	NAME	MM	AS	RS
11kV XLPE Cable & accessories		SIGN	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
		DATE	01.10.16	04/10/16	05/10/16
		GROUP	TBEM		
		W.O. No	84004		
CUSTOMER/CONSULTANT	Gujarat State Electricity Corporation Limited, Vadodara, Gujarat/ Development Consultants Pvt. Ltd., Kolkata				

PROJECTS	400kV Switchyard Extension and 400kV GIS for 1x800 MW for Wanakbori Thermal Power Station Extn. Unit-8	
<u>Contents:</u>		
Section No.	Description	No of Pages
SECTION-1	SCOPE, SPECIFIC TECHNICAL REQUIREMENTS and QUANTITIES	8+1+1+1
SECTION-2	EQUIPMENT SPECIFICATION	10+7
SECTION-3	PROJECT DETAILS AND GENERAL SPECIFICATION	37+2
SECTION-4	GUARANTEED TECHNICAL PARTICULAR (at contract stage)	2
SECTION-5	CHECK LIST FOR 11KV XLPE cable (At tender stage)	2
Offers without checklist will not be evaluated		

Rev	Date	Altered	Checked	Approved	
Distribution				To	
				Copies	

→ Shri D.K. Shukla
12/10/16

SECTION 1

SCOPE, SPECIFIC TECHNICAL REQUIREMENTS AND QUANTITIES

1.1 SCOPE:

This technical specification covers the requirements of

A. Design, manufacturing, testing at works, packing and dispatch, transporting of

- 11kV cable, three core 240 sq mm, Al conductor, XLPE insulated, Armored, Flame Retardant low smoke (FRLS) outer sheathed.
- Supply of 11 kV cable termination kits (indoor & outdoor), cable joint, accessories such as clamps, tags and route markers, tools, tackles and consumables if required.

B. SERVICES:

- Site survey to locate joints, estimate cable length
- Supervision of laying and erection of 11kV cable, erection and commissioning of 11kV cable termination and jointing kit, site testing of 11 kV XLPE Cables and its accessories complete in all respect along with accessories.
- Testing & commissioning of cable including provision of test engineer, supply of all test equipment's and arrangement shall be in Bidder scope.
- Unloading, storage and erection **are excluded** from scope.

There are total two circuit of 11kV cables connecting from 11kV switchgear in power plant to switchyard LT transformer (11/0.433 kV, 200kVA). One run of 3CX 240 sq. mm cable for each incomer shall be laid in buried/ cable trench/ pipe/ trestle between 11kV switchgear (located at unit 8 side) and 400kV AIS extension substation located at existing power plant side. The tentative route length of each individual 11kV cable system is 2500 m.

The specification comprise of following sections:

Section-1: Scope, specific technical requirements & Bill of Quantities.

Section-2: Equipment specification under scope of supplies.

Section-3: General technical requirements for all equipments under the project.

Section-4: Equipment Data Sheet

Section -5: Checklist

In case of any conflict between various sections, order of precedence shall be in the same order as listed above.

The equipment is required for the following project:

Name of the Customer:	Gujarat State Electricity Corporation Limited, Vadodara,
Name of the Project:	400kV Switchyard (extn.) & 400kV GIS for 1x800 MW Wanakbori Thermal Power Station Extn. Unit-8
Name of the Consultant:	Development Consultants Pvt. Ltd., Kolkata

C. SUPPLIES:

Bidder shall offer all the items in both Supplies and supervision Services as per the BOQ (Annexure-I). Bids, in which either Supplies or supervision Services are not offered, shall be rejected.

1.2.1 SPECIFIC TECHNICAL REQUIREMENTS:-

S. No.	PARTICULAR	Unit	DATA
1.	Voltage grade (Uo/U) of cable	kV	11/11(UE)
2.	System	-	11kV Unearthed
3.	Highest System Voltage	kV	12
4.	System frequency	Hz	50
5.	Codes & Standards	-	Latest editions of IS 7098 Part 2(for cables) and IS 13573(For termination and joint)
6.	Rated continuous Current	A	10 (For 200kVA Transformer of extension switchyard)
7.	System Power Frequency Withstand Voltage	KV rms	28
8.	Lightning Impulse Withstand Voltage of required cable	kVp	95
9.	Creepage distance	mm/kV	31
10.	Ambient air temp.	Deg C	50
11.	System Short Circuit Withstand Current at a rated voltage for 3 second	kA r.m.s	40
12.	Minimum short circuit withstand current capacity of required cable for 0.2 second (design purpose)	kA r.m.s	50
13.	Single core/ Multi core	-	Three core
14.	Conductor size of cable	-	240 sq. mm
15.	Conductor		
a)	Conductor material		Aluminum, stranded Compacted Circular, grade H2 & class 2 , conforming to IS:8130
b)	Conductor screen		Extruded semi conducting compound
i)	Type of Insulation	-	XLPE, conforming to IS:7098(part-2)
ii)	Minimum thickness	-	0.3mm ✓
16.	Insulation		
a)	Material		Extruded XLPE
b)	Continuous Withstand Temperature (For insulation)	Deg C	90 ✓
c)	Short Circuit withstand Temperature (For insulation)	Deg C	250 ✓
17.	Insulation screen		
a)	Non-metallic		
i)	Material		Extruded semi conducting compound with a layer of non-magnetic metallic tape. ✓
b)	Metallic		
i)	Metallic screen (for multi core cable)	-	Cu tape
ii)	Size	-	Nominal thickness 0.1 mm with tolerance (± 10%)

Technical Specification for 11kV cable and accessories

S. No.	PARTICULAR	Unit	DATA
	Minimum overlap		10%
iii)	Earth fault current withstand capacity of metallic screen of cable	-	0.3kA for 2 second, screen of each core shall be rated individually for the above value)
18.	EXTRUSION (INSULATION AND SCREENS)		
a)	Process		Triple extrusion (Extruded semi-conducting compound conductor screen and insulation screen shall be applied alongwith XLPE insulation in a single operation by triple extrusion method.)
b)	Method of curing		Dry cure CCV using pressurized nitrogen
19.	Core identification	-	By colored strips applied on core or by numerals as per IS
20.	Inner sheath		
a)	Material	-	Extruded HRPVC/FRLS compound conforming to type ST2 of IS:5831 for three core cables
b)	Color		Black
c)	Fillers		Acceptable
d)	Material of fillers(if permitted)		Same as inner sheath (material of filler compatible with inner sheath)
e)	Method of application		
i)	With fillers		Pressure/ vacuum extruded
ii)	Without fillers		Pressure extruded
21.	ARMOUR		
a)	Material	-	Galvanized steel, round wire conforming to IS 7098 & IS 3975
b)	Minimum coverage		90%
c)	Gap between armour wires		Shall not exceed one armour wire space (No cross-over/ overriding)
d)	Breaking load of joint		95% of normal armour
22.	Outer sheath		
a)	Material		Extruded HRPVC/FRLS compound conforming to type ST2 of IS:5831
b)	Method of application		Extruded
c)	Color		Black
d)	Marking		Owner's identification mark i.e. "GSECL" and "BHEL-TBG", Manufacturer's name and/or trade mark, Type of insulation, no. of cores, and size of cables, type of improved fire performance, IS number@ 1m (by embossing)
23.	FRLS Characteristics		
a)	Oxygen index		Min. 29 (As per ASTM-D 2863-77)
b)	Temperature index		Min. 250Oc at oxygen index 21(As per

Technical Specification for 11kV cable and accessories

S. No.	PARTICULAR	Unit	DATA
			NES-715)
c)	Acid gas generation		Max. 20% (As per IEC-60754-1)
d)	Smoke density rating		Min. 60% (As per ASTM-D-2843-7)
e)	Rodent & Termite test		The test shall be carried out to note the presence of rodent and termite repelling chemical in PVC compound. Normal procedure is that a few chippings of the PVC compound are slowly ignited in a porcelain dish or crucible in a muffle furnace at about 600°C. The resulting ignited ash is boiled with a little ammonium acetate solution (10%). A drop of aqueous sodium sulphide solution is placed on a thick filter paper and it is allowed to soak. The spot is touched with a drop of above extract. A black spot indicates the presence of anti-termite & rodent compound
f)	Flammability test		The test shall be carried on finished cables as per following Standards a) Swedish Chimney test – SS: 424-14-75 b) IEEE std.383 – 1974 latest c) IEC std. 332-1, 332-3 and IEC 331
24.	Construction and other details of accessories	-	As per 1.2.2 below
25.	Standard Drum length (steel)	m	1000
26.	Drum marking		Owner's identification mark i.e. "GSECL" and "BHEL-TBG", Manufacturer's name and /or trade mark, Type of Cable & Voltage Grade, year of manufacture, Type of insulation, No. of core & Cable size, cable code, length of cable on drum, No. of length on drum (if more than one), direction of rotation(by arrow), approx. gross mass, IS/IEC number and ISI mark.
27.	TOLERANCE		
a)	Tolerance on OD		±2 mm over the declared value in data sheet
b)	Tolerance on individual drum length	-	±5%

Technical Specification for 11kV cable and accessories

S. No.	PARTICULAR	Unit	DATA
c)	Overall tolerance on total dispatched quantities	-	(-)2% and (+) 0%
28.	Type of outdoor cable termination and joint	-	Heat Shrinkable
29.	Cable Laying	-	Buried / pipe rack/ trench/ trestle
30.	Jointing of cable	-	On two pole structure (As per Annexure-2) Or straight through joints in buried / pipe /trench

1.2.2 Cable Termination & Jointing Kits

The Bidder shall supply cable termination and jointing kits in requisite quantity for H.T. Power Cables along with all accessories & consumables required for making termination and joints complete. All the materials and components of the termination/joints shall be suitable and compatible with the type of cables for which the terminals/ joints are intended.

The straight through joints of H.T. cables shall be of Tapex/ Paracast/Parawrap or equivalent type. The end termination kits for H.T. cables shall be of Raychem/3M/Elastimold or equivalent type. Cable joint or end terminations on Electrical equipment shall be suitable for Indoor & Outdoor use, as the case may be.

Glands and lugs required for termination of H.T cables shall be supplied by the Contractor in required quantity.

Termination "Kits shall be complete with all accessories and consumables required for complete termination or jointing. **Tinned Copper heavy duty long Barrel type cable lugs** for termination kits & jointing ferrules for straight through jointing kits shall form part of the kit. Tinned Copper Earthing lug and braided copper earth lead shall make part of termination kit. Termination kits shall be provided with Bi-metallic washers.

1.3 QUANTITIES

Supplies/Material and Services required for the execution of the job are listed in **Annexure-I**. All item listed in the following BOQs shall be offered. Any item not appearing herein but clearly mentioned in Specification shall be included in the offer. The BOQs included in the offer to be submitted by the Bidder shall be exhaustive in this respect.

Bill of Quantity

Sl. No.	Description	Unit	Qty.
A	Main items		
1	Supply item - 11kV XLPE, Al conductor, 3 core, 240 sqmm cable	Mtrs.	5000
2	Supply item - 11 kV outdoor cable termination system complete in all respects suitable for 11kV, 3 core, 240 sqmm cable (creepage distance - 31mm/KV) for outdoor cable joint on pole type structure . It includes lug type connectors, If required. (2 SET IS FOR 1 CIRCUIT)	Sets	4
3	Supply item - 11 kV heat shrinkable, straight through joints complete in all respects suitable for 3 core, 240sqmm aluminium cable for Transformer Box end (Heat Shrinkable/ Cold shrinkable) including lugs/ clamps & connectors, as applicable.	Sets	2
4	Supply item - 11 kV indoor termination suitable for 11kV Switchgear / LT transformer cable box including (1 SET IS FOR 1 CIRCUIT)	Sets	4
5	Supply item - cable route marker as per Annexure-3	nos.	80
6	Supply item - Earthing materials for 11kV XLPE cable system as per requirement. (1 lotis for completet package)	lot	1
7	Supply item - Non magnetic, Single type cleats/ clamps for fixing 11kV cable to pole structure	nos.	12
8	11kV pin type insulators for outdoor cable termination	nos.	6
9	Supply item - Consumables having limited shelf life required during erection, testing and commissioning. (1 lot is for complete package).	lot	1
10	Cleats for fixing cable to cable tray/rack	nos.	100
11	Supply item - Miscellaneous items like cable tags etc as per Annexure-3	lot	1
12	Any other item required to complete the job and not listed above	lot	1
B	Services		
13	Services - Joint Site Survey for routing of 11kV cable	Lot	1
14	Services - supervision of laying & erection of 11kV cable	Sets	2
15	Services - Erection of 11kV outdoor heat shrinkable type termination kit & joint on pole type structure (2 SET IS FOR 1 CIRCUIT)	Sets	2
16	Services - Erection of 11 kV heat shrinkable, straight through joints	Sets	2
17	Services - Erection of 11 kV indoor cable termination kit	Sets	4
18	Services - Site testing & commissioning of 11kV Cables (1 Lot for 1 circuit) alongwith termination kits & joints, complete in al respects	Lot	2

Notes:

- 1) The un-priced BOQ shall be strictly as per ANNEXURE-I.
- 2) **Cable Length** - The exact length shall also be decided by supplier after visiting site & making precise measurements at contract stage. Manufacturing lengths and drum length shall be determined as per the joint site survey with GSECL/BHEL.
 - a) The Payment of cables length (for supply) will be as per approved quantities after joint survey.
 - b) The exact length may vary by -20% to +20% at Contract Stage based on actual measurement at site and calculations submitted by the bidder. Individual quantity of other items may vary to any extent and may get deleted during contract/execution stage.
- 3) The cable cleats/clamps including hardware for fixing the cable on BHEL provided support structure/ cable tray/racks shall be in supplier scope.
- 4) **Lug type Connectors** required for each joint on pole type support structures shall be in supplier's scope.
- 5) Consumables having limited shelf life required during erection, testing and commissioning, shall be supplied just before erection after confirmation from BHEL. (1 lot is for complete package).

Calculation

- 6) Bidder will submit short circuit calculation for metallic screen and armor coverage percentage after award of contract. Any other calculations which may be required during detailed engineering stage may also be submitted.

Earthing

- 7) Earthing of 11kV cables system, including termination and joint along with required accessories shall be in supplier scope. Earth mat grid exists at both ends (11kV switchgear/Extension switchyard).
- 8) Earthing of cable supports shall with suitable flat size will be in BHEL scope.

Schedule:

- 9) Supplier will submit detailed bar chart indicating all the milestones from Engineering till manufacturing/ testing, dispatch to site and commissioning.
- 10) Bidder to submit list of consumables with shelf life of less than two years. It shall be supplied before erection after clearance from BHEL.

Construction Supply

- 11) The necessary power supply at site shall be provided by BHEL at one point only.

Installation

- 12) Civil works for construction of buried cable trench along with excavation, back fill and supply of all required material as per Annexure-2 shall be in BHEL scope.
- 13) Supply and erection of two pole structure for fixing jointing kit as per Annexure-2 shall be in BHEL scope.
- 14) The cable cleats including hardware for fixing the cable on two pole structure. BHEL will provide two pole structure. 11kV pin type insulators are in scope of bidder.
- 15) Each cable and conduit run shall be tagged with numbers that appear in the cable and conduit schedules. Cables and conduits shall be tagged at their entrance, bends, every 30.0M and exit from any equipment, junction box. When a cable/conduit passes through a wall, tags shall be fitted on both sides of the wall.
- 16) Store will be provided by BHEL. Bidder to provide their requirement of space in open and closed store during tender stage.
- 17) Accommodation and travel expenses for bidder's staff shall be in supplier scope.
- 18) Cable for road crossing shall be laid in Hume pipes (Supply and erection of Hume pipes shall be in BHEL scope).
- 19) **Termination/jointing:** Provision of Jointer alongwith tools and tackles for jointing work and termination material, consumables, clamps, route markers, tools and Terminating Scaffolding, assembly of joint and sealing ends will be in vendor's scope.
- 20) **Site Test:** Provision of test engineer, supply of all test equipment (including DC test for outer sheath). AC voltage test of insulation with voltage of U_0 (complying with IEC 60840) etc. for completion of total site work. AC supply shall be arranged by BHEL/GSECL from nearby grid.
- 21) Any other special tools, tackles, consumables and accessories required to complete the termination, jointing etc. shall be included in the offer. Please note BHEL shall not provide any equipments, tool and tackles for carrying out any test.

1.4 TYPE TESTS:

Bidder shall submit valid type test reports of the tests as per relevant IS/IEC carried out within last five years from the date of LOI for BHEL i.e. 05.09.2014.

These reports should be for the tests conducted on the equipment similar to those proposed to be supplied under this contract and test (s) should have been either conducted at an independent laboratory or should have been witnessed by a client. These test reports shall be vetted by GSECL /BHEL at contract stage. If any test report(s) is not acceptable by customer during contract execution stage, same has to be conducted by bidder without any commercial and delivery implication.

All acceptance and routine tests as per relevant standards and specification shall be deemed to be included in the bid price.

Technical Specification for 11kV cable and accessories

All equipment/cables shall be of proven design and type tested as per relevant standard. Type test certificates/specific type tests shall be furnished/conducted, if asked for with reference to any specific equipment in the respective sub-section of the Specification.

1.5 INSPECTION & TESTING:

Before being fitted on the equipment, all components shall be subjected to routine tests at the Contractor's factory, as per the relevant IEC/IS standards. A detailed test report proving the successful passing of such tests shall be provided.

Prior to dispatch, the routine & acceptance tests shall be carried out on equipment in accordance with the applicable IEC /IS and the material shall be offered for final inspection to BHEL and GSECL in accordance with agreed quality plan with 3 weeks advance information.

1.6 QUALITY PLAN:

The contractor shall carry out contract works in accordance with sound quality management principles which shall include such as controls which are necessary to ensure full compliance to all requirements of the specification & applicable international standards. These quality management requirements shall apply to all activities during design, procurement, manufacturing, inspection, testing, packaging, shipping, inland transportation, storage, site erection & commissioning. Contractor shall submit detailed Quality Plan for BHEL / customer's approval within 1 week of P.O. placement.

1.7 QUALIFYING REQUIREMENT & EXPERIENCE

The bidder shall submit the documentary evidence that equipment of similar rating has been manufactured by him and are in successful operation for more than two (2) years in two or more projects of similar nature on the date set for opening of the bid.

The Bidder shall submit along with his bid a list of major contracts for supply of similar equipment executed/being executed by him during last 5 years giving detailed particulars such as quantity, equipment rating, contract value, name of the Owner / Purchaser, year of commissioning etc.

Notwithstanding anything stated above, the customer reserves the right to assess bidder's financial and other capabilities to execute the contract. Necessary information about the financial and technical resources, organization and experience to undertake the manufacturing and supply of such equipment shall be supplied by the Bidder as an evidence of his capability for satisfaction of the Owner / Purchaser.

SCHEDULE OF TECHNICAL DEVIATIONS

Bidder shall list below all technical deviation clause wise w.r.t. tender specifications:

S.No.	Page No.	Clause No.	Deviation	Reason / Justification
-------	----------	------------	-----------	------------------------


Any deviation not specifically brought out in this section shall not be admissible for any commercial implication at later stage. Except to the technical deviations listed in this schedule, bidder's offer shall be considered in full compliance to the tender specifications irrespective of any such deviation indicated / taken elsewhere in the submitted offer.

Date:


Tenderer's Stamp & Signature

NOTE: -


- 1 ALL DIMENSION ARE IN MM.
- 2 SUITABLE CLAMPING ARRANGEMENT SHALL BE PROVIDED FOR FIXING OF 11kV CABLE ALONG WITH GI FLAT OF TWO POLE STRUCTURE
- 3 BENDING RADIUS OF CABLE IS 15D (D= OVERALL DIAMETER 76MM)
- 4 TWO POLE STRUCTURE MATERIAL (ISMC, ANGLE & FLAT) SHALL BE GALVANIZED AS PER IS
- 5 FENCE AND GATE SHALL BE PROVIDED AROUND TWO POLE STRUCTURE
- 6 ~~TOTAL REQUIRED QUANTITY OF TWO POLE STRUCTURE FOR JOINING OF 11kV CABLE IS 5 NOS.~~
- 7 GI ANGLE(75X75X6) AND GI FLAT(75X12) SHALL BE BOLTED TO ISMC150
- 8 1CX240SQMM CABLE SHALL BE OBTAINED FROM 3C, 240SQMM CABLE
- 9 SUITABLE HOLE FOR FIXING OF 11KV PIN INSULATOR AND U TYPE CLAMP FOR FIXING OF 11KV CABLE WITH FLAT SHALL BE DONE AT SITE

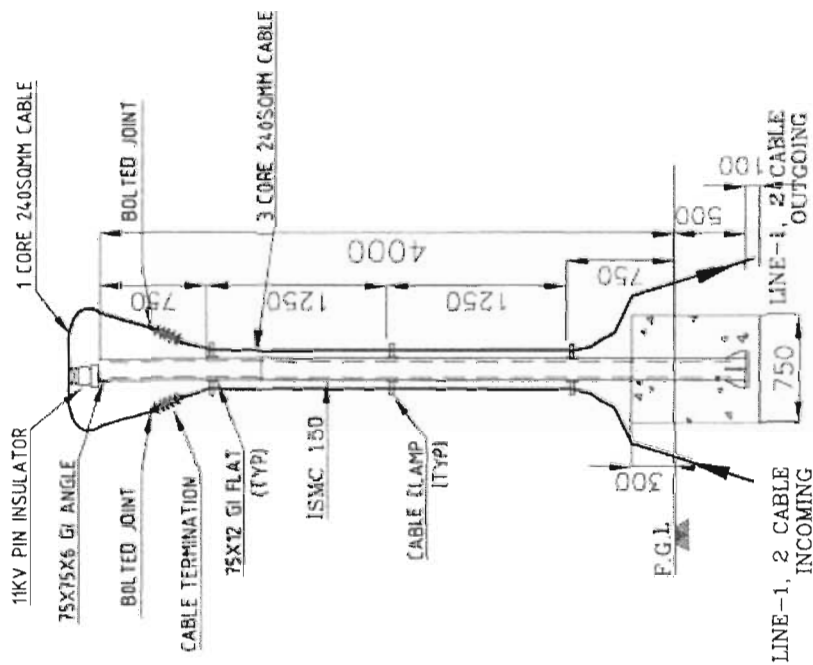


SIDE VIEW

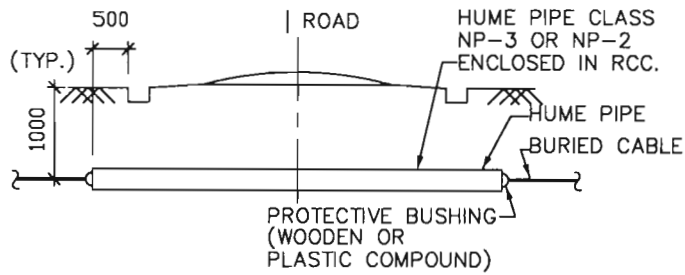


**ROAD CROSSING
OF BURIED CABLE**

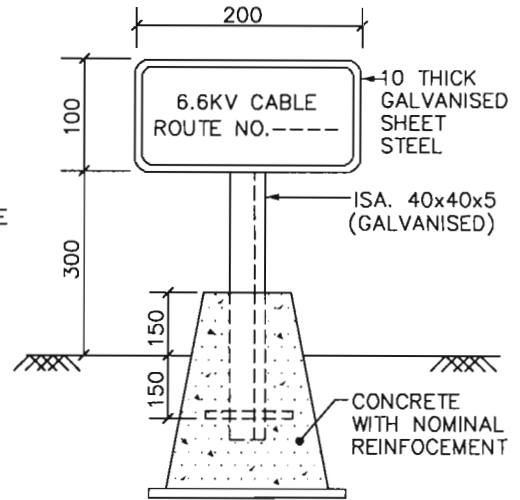


**CABLE ROUTE MAKER
(VOLTAGE TO BE MARKED)**

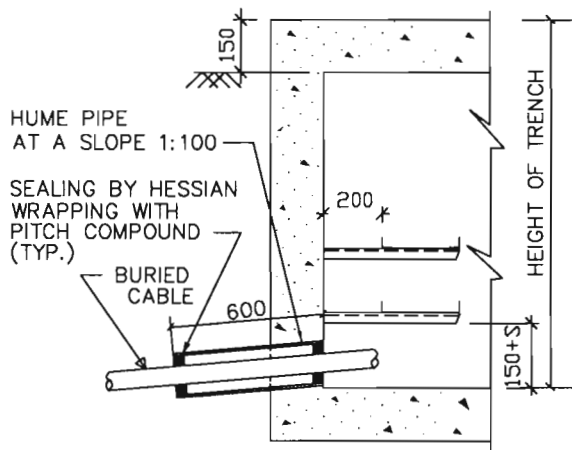

**TYP. DETAILS OF BURIED CABLE
ENTRY TO BLDG. OR CABLE TRENCH**

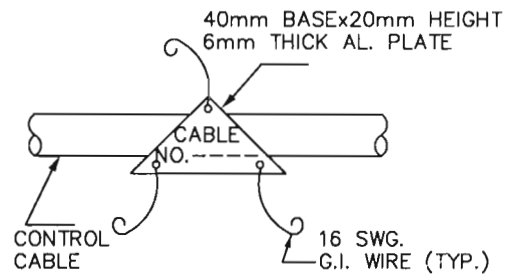

**CABLE TAG
CONTROL CABLE**

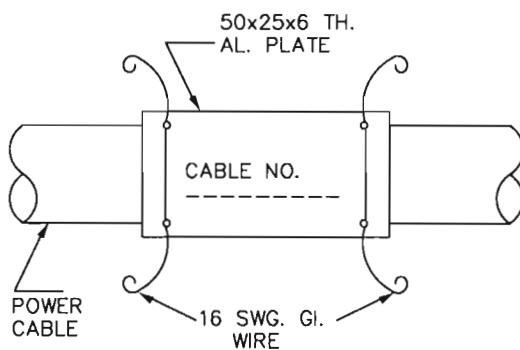

**CABLE TAG
POWER CABLE**

NOTE:

ALL DIMENSIONS ARE IN 'MM'.

FOR TENDERING ONLY

					 GUJARAT STATE ELECTRICITY CORPORATION LIMITED VADODARA, GUJARAT	
					 DEVELOPMENT CONSULTANTS PVT. LTD. CONSULTING ENGINEERS KOLKATA . MUMBAI . CHENNAI . NEW DELHI	
TITLE: NOTES & DETAILS CABLING					PROJECT: 1x800 MW SUPERCRITICAL THERMAL POWER PLANT (UNIT #8 AT WANAKBORI THERMAL POWER STATION, GUJARAT)	
PROJECT: 1x800 MW SUPERCRITICAL THERMAL POWER PLANT (UNIT #8 AT WANAKBORI THERMAL POWER STATION, GUJARAT)					JOB NO. K9213R SCALE : NTS DWG. NO. K9213R-DWG-E-0400 REV. 0 SHT. 32	
SKB	MS	BR	0	04.07.12		
APPVD.	REVWD.	CHKD.	REV.	DATE		

SECTION 2

GENERAL ELECTRICAL SPECIFICATIONS

As per GSECL Technical Specifications enclosed as below:

TECHNICAL SPECIFICATION FOR CABLES VOLUME: IIF/2 SECTION-IV
K9213R-EPC-SPC-001_V2F2-SEC-4 (10 pages)

Equipment specification – (7 pages)

VOLUME : IIF/2

SECTION-IV

**TECHNICAL SPECIFICATION
FOR
CABLES**

CONTENT

CLAUSE NO.	DESCRIPTION
1.00.00	SCOPE OF SUPPLY
2.00.00	CODES & STANDARDS
3.00.00	DESIGN CRITERIA
4.00.00	SPECIFIC REQUIREMENTS
5.00.00	TESTS
6.00.00	DRAWINGS DATA & MANUALS

ATTACHMENTS

ANNEXURE-A	RATINGS AND REQUIREMENTS - H.V POWER CABLES (11KV, 6.6KV & 3.3 KV)
ANNEXURE-B	RATINGS AND REQUIREMENTS - L.V POWER CABLES
ANNEXURE-C	RATINGS AND REQUIREMENTS - CONTROL CABLES
ANNEXURE-D	RATINGS AND REQUIREMENTS - 1.1KV FS POWER CABLE
ANNEXURE-E	RATINGS AND REQUIREMENTS - 1.1KV FS CONTROL CABLE
ANNEXURE-F	RATINGS AND REQUIREMENTS - FLEXIBLE TRAILING CABLES
ANNEXURE-G	CABLE SIZES

SECTION-IV

TECHNICAL SPECIFICATION FOR CABLES

1.00.00 SCOPE OF SUPPLY

1.01.00 ~~Power and Control Cables shall cover the requirement of entire Plant including the switchyard. The cables shall be furnished in accordance with this specification and annexure.~~

Other cables including special cables if any which are necessary as per proven engineering practice for satisfactory & trouble free operation of the entire cable system of the plant shall also be within the scope of supply. These shall include all such cables for electrical integral with mechanical equipment systems and subsystems.

1.02.00 Cable shall be furnished in accordance with this specification and the following annexures :

- | | | |
|----|--------------------------------------|-------------------------|
| a) | 11 kV, 6.6kV & 3.3 kV Power cables : | Annexure - A |
| b) | 1100V Power Cables : | Annexure – B |
| c) | Control Cables : | Annexure – C |
| d) | Fire Survival Cables : | Annexure – D & E |
| e) | Flexible Trailing cable : | Annexure – F |

1.03.00 All relevant drawings, data and instruction manuals

2.00.00 CODES & STANDARDS

2.01.00 All cable and materials shall be designed, manufactured and tested in accordance with the latest applicable Indian Standards (IS) and IEC except where modified and/or supplemented by this specification.

2.02.00 Cable and material conforming to any other standard which ensures equal or better quality, may be accepted. In such case, copies of the English version of the standard adopted shall be submitted along with the bid.

2.03.00 The electrical installation shall meet the requirements of Indian Electricity Rules as amended upto date and relevant IS Code of Practice. In addition, other rules and regulations applicable to the work shall be followed.

3.00.00 **DESIGN CRITERIA**

3.01.00 Cables will be generally laid on ladder type trays, perforated type cable trays or drawn through rigid steel conduits [Rigid steel conduits shall be used for interconnection of cables from near-by cable tray to equipment where cable tray cannot be installed as well as to prevent mechanical damage of cables for critical equipment. Moreover in dust prone area the lay out of cable tray shall be in vertical plane].

3.02.00 For continuous operation at specified rating, maximum conductor temperature shall be limited to the permissible value as per relevant standard and/or this specification which one is more stringent.

3.03.00 The insulation and sheath materials shall be resistant to oil, acid and alkali and shall be tough enough to withstand mechanical stresses during handling.

3.04.00 Armouring shall be single round wire of galvanized steel for multicore cables and aluminum for single core cable for power and control cables. For fire survival control cable, the armouring over inner sheath shall consist of single layer of wire / round galvanised steel wire as per IS 3975 amended upto date. For Fire survival power cable, Single core cables to be used in A.C. system, the armouring over inner sheath shall consist of single layer of round copper wire, for multi-core cables to be used in A.C. system and single/two core cables in D.C. System, the armouring over inner sheath shall consist of single layer of round galvanised steel wire.

3.05.00 The outer sheath shall have flame retardant low smoke halogen evolution (FRLS) characteristics or fire survival characteristics as applicable and shall meet the requirements of additional tests specified for the purpose.

3.06.00 Core identification for multicore cable shall be provided by colour coding.

3.07.00 HT cables shall be manufactured by triple extrusion dry cured (CCV) process using pressurized nitrogen.

4.00.00 **SPECIFIC REQUIREMENTS**

4.01.00 **General Description**

All Cables shall be furnished in strict compliance with ratings and requirements and sizes as given in Annexures to this Specification.

4.02.00 **Drum Length and Tolerance**

The cables shall be supplied in non-returnable packing steel drum for 11 kV, 6.6 kV & 3.3 kV power cables, wooden drums for 1100V power and control cables, each containing minimum 500 meters length of larger sizes of cable unless specifically asked for. For smaller sizes of cables, each drum shall contain 1000 meters length of cable. Allowable tolerance on individual drum length is $\pm 5\%$.

4.03.00 **Non-Standard Length**

Non-standard lengths upto 5% of the total ordered quantity may be accepted. However the Contractor will be required to obtain approval before packing the Cables on drums. Non-standard lengths shall not be less than 100 metres in any case.

4.04.00 Cable identification

Cable identification shall be provided by embossing on every meter on the outer sheath the following :

- a) GSECL
- b) Manufacturer's name or trade mark
- c) Voltage grade
- d) Year of manufacture
- e) Type of insulation, e.g. XLPE/PVC/HR85/IE2 etc.
- f) No. of core and size of cables.
- g) Type of improved fire performance, e.g. FR/FRLS/FS
- h) IS number

4.05.00 Packing

4.05.01 Cables shall be supplied in non returnable drums. The drums shall be of heavy construction. All wooden parts shall be manufactured from seasoned wood. All ferrous parts used shall be treated with suitable rust preventive finish or coating to avoid rusting during transit or storage. Wooden cable drum shall be treated by immersing in copper-nitrate solution.

4.05.02 Cable shall be wound and packed on drums in such a manner that it will be properly sealed and firmly secured to the drum. The ends of each length shall be sealed before shipment.

4.05.03 The cable drums should carry the following details in printed form:

- a) MSPGCL
- b) Manufacturer's name or trade make
- c) Type of cable & voltage grade
- d) Year of manufacture
- e) Type of insulation e.g. XLPE/HRPVC/IE2
- f) No. of core and size of cables
- g) Cable code e.g. FRLS/FS
- h) Length of cable on drum

- i) No. of length on drum, if more than one
- j) Direction of rotation, by arrow
- k) Approx. gross mass.
- l) IS/IEC number and ISI mark

4.06.00 **Joints and Terminations**

Materials of construction for a joint/termination shall perfectly match with the dielectric chemical and physical characteristics of the associated cables. The material and design concepts shall incorporate a high degree of operating compatibility between the cable and joints. The protective outer covering (jacket) used on the joints/terminations shall have the same qualities as that of the cable outer sheath in terms of ambient/operating temperature withstand capability and resistance to hazardous environments and corrosive elements. Straight through joints and terminations for HT cables shall be heat shrinkable type.

4.07.00 **Selection Criteria**

- 4.07.01
- a) HT and LT power cables shall be selected on the basis of current carrying capacity, short circuit rating and permissible voltage drop.
 - b) While sizing power cables, following aspects shall be reckoned:
 - i) Ground/Ambient Air temperature
 - ii) Depth of Laying.
 - iii) Power Cables touching each other.
 - c) Cables, for circuit breaker controlled feeders, shall withstand the short circuit current for the fault clearing time. 0.2 Sec.
 - d) HT cables shall be sized based on the following considerations:
 - Rated current of the equipment and ground/ambient temperature.
 - Touching/spacing of cable.
 - Depth of laying.
 - The voltage drop of the cable , during motor starting condition , shall be limited to 15% and during full load running condition shall be limited to 3 % rated voltage. Other outgoing feeder /transformer feeder shall be limited to 3% rated voltage.
 - Short circuits withstand capability
 - e) For fuse/MCCB/Breaker protected circuits the conductor size shall depend upon full load current subject to voltage drop limited to 3% during running of all feeders and 15% during starting for motor feeders. In addition, transformer regulation shall also be considered

for loads fed from 415V PMCC. In case of other outgoing line feeder voltage drop shall be limited to 3%.

- f) For loads fed from local panels, the total running voltage drop in cable from 415V PMCC to local panel and from local panel to individual motor shall be limited to 3% at full load motor current while the same during starting shall be limited to 15%.
- g) As per national electric code (NEC) current rating capacity of motor feeder/cables should be 125% of full load current.
- h) For welding receptacle, 3% running drop shall only be considered.

The minimum sizes of L.T cable to be chosen are as below:

AL - 16 mm² (3 core) & 16mm² (2 core); Cu - 2.5 mm²

4.07.02 Apart from above, consideration shall also be given to limit the cable to some standard sizes instead of using too many types.

4.07.03 The standard cable sizes, amp capacities, derating factors, as given in IS/IEC will be generally followed.

4.07.04 a) For breaker protected circuits minimum size of the cable shall be as follows:

1100V Power Cable	:	240 Sq mm XLPE AL
6600V & 3300V Power Cable	:	185 Sq mm XLPE AL
11000V Power Cable	:	240 Sq mm XLPE AL

- b) For motor circuits the selection of size will be made ensuring that the cable shall withstand a short circuit fault directly following a second hot start.

4.07.05 For fuse/MCCB protected circuit, the conductor size will depend on full load current subject to voltage drop not exceeding 3%. For practical purposes, the minimum size chosen is as below :

- a) Aluminium : 16 Sq mm.
- b) Copper : 2.5 Sq mm.

4.07.06 All control cables shall be 2.5 Sq mm stranded copper cable.

4.07.07 Multicore control cables will generally have spare conductor (s) in accordance with the following chart :

Conductors required	Cables
1 or 2	1-3/C
3 or 4	1-5/C
5 or 6	1-7/C

7 or 8

9 or 10

Above 10

1-9/C

1-12/C

Two or more of above cables

4.07.08 Separate cables for each type of following services/functions as applicable shall be used for each feeder. Same multicore cable using different services shall not be acceptable.

- a) Power.
- b) Control, interlock and indication.
- c) Metering and measuring.
- d) Alarm and annunciation.
- e) C.T. Cables.
- f) V.T. Cables.

4.08.00 Cable Identification

Cable identification shall be provided by embossing on the outer sheath the following :

- a) Manufacturer's name or trade mark
- b) Manufacturer's name or trade mark
- c) Voltage grade
- d) Year of manufacture
- e) Type of insulation, e.g. XLPE, HRPVC & IE2 etc.
- f) No. of core & size of cables
- g) Type of outer sheath e.g. FRLS, FS etc.

4.09.00 ~~Selected sizes of power and control cables are given in Annexure-G.~~

4.10.00 Fire Survival Cables shall be used for important auxiliaries / area as recommended by Standard Technical Specification by CEA as below for the following :

Fire Survival Power & Control Cables shall be used for important auxiliaries/ areas like:

- i. DC emergency lube oil pump
- ii. DC hydrogen seal pump
- iii. Turbine lube oil pump/barring gear

- iv. DC emergency lighting for main building and service building
- v. DC cables for battery to charger & DC distribution boards
- vi. Jacking oil pump
- vii. Emergency turbine trip in control room
- viii. Boiler Turbine : Generator inter trip which include the interconnection between
 - Boiler master fuel trip and turbine trip relays
 - Generator trip relays & turbine trip relays
 - Generator trip relays & generator breaker
 - Generator trip relays & field breaker
 - Generator trip relays & unit auxiliary transformer breaker
 - Incomer cables for DG board, emergency board, DC lighting board etc.

5.00.00 **TESTS**

5.01.00 **Shop Tests**

The Cables shall be subject to shop tests in accordance relevant IS/IEC standards to prove the design and general qualities of the Cables as below:

5.01.01 Routine tests on each drum of cables.

5.01.02 Acceptance Tests on 1 drum out of every 10 drums chosen at random for acceptance of the lot for every size.

5.01.03 Type test on each type and size of cable, inclusive of measurement of armour DC resistance of power cables on one drum out of every 10 drums of cable.

5.02.00 **Additional Tests**

Following additional acceptance tests shall also be performed on each type of cables having outer sheath with improved fire performance (Type FRLS, FS):

5.02.01 Oxygen index test

The Oxygen index shall not be less than 29.

5.02.02 Temperature Index Test

The measured value of temperature index shall be 21 at a temperature of 250°C for FRLS cables and 350°C for FS cables

5.02.03 Flame Retardance test on single cable and on bunched cables

After the test, there should be no visible damages on the test specimen within 300mm from its upper end.

After burning has ceased, the cables should be wiped clean and the charred or affected portion should not have reached a height exceeding 2.5 meter above the bottom edge of the burner, measured at the front and rear of the cable assembly. 3 Hours fire rating test shall be carried out for FS cable as per IEC331

5.02.04 Halogen acid gas evolution test

The level of HCL evolved shall not exceed 20 per cent by weight. HCL evolved shall not be exceed 2% for FS cable.

5.02.05 Smoke density test

The test shall be smoke generation by the outer sheath under fire as per ASTM D 2843. The FRLS cables shall meet the requirements of light transmission of minimum 40% after the test. Minimum transmission shall be 80% for Fire Survival cables.

5.02.06 Test for specific optical density of smoke

The cables shall meet the requirements of IS/IEC.

5.02.07 Test for rodent & termite repulsion property

The test shall be carried out to note the presence of rodent and termite repelling chemical in PVC compound. Normal procedure is that a few chippings of the PVC compound are slowly ignited in a porcelain dish or crucible in a muffle furnace at about 600°C. The resulting ignited ash is boiled with a little ammonium acetate solution (10%). A drop of aqueous sodium sulphide solution is placed on a thick filter paper and it is allowed to soak. The spot is touched with a drop of above extract. A black spot indicates the presence of anti-termite & rodent compound.

Flammability test shall be carried on finished cables as per following standards-

- a) Swedish Chimney test – SS: 424-14-75
- b) IEEE std.383 – 1974 latest
- c) IEC std. 332-1 and IEC 331

5.03.00 **Test Witness**

Tests shall be performed in presence of Owner/Purchaser's representative. The Contractor shall give at least thirty (30) days' advance notice of the date when the tests are to be carried out.

5.04.00 **Test Certificates**

5.04.01 Certified reports of all the tests carried out at the works shall be furnished for approval of the Owner/Purchaser.

5.04.02 Test reports shall be completed with all details and shall also contain IS/IEC specified limit values, wherever applicable, to facilitate review.

5.04.03 The cables shall be dispatched from works only after receipt of Owner/ Purchaser's written approval of the test reports.

6.00.00 **DRAWINGS, DATA & MANUALS**

6.01.00 Drawings, Data and Manuals shall be submitted with the bid and for approval/ reference and subsequent distribution after the issue of Letter of Intent in quantities and procedures as specified in General condition of contract and/or elsewhere in this specification.

6.02.00 **To be submitted with the Bid**

- a) Manufacturer's catalogues giving cable construction details and characteristics.
- b) Cable current ratings for different types of installation, inclusive of derating factors for ambient temperature, grouping etc.
- c) Write-up on Manufacturer's recommended method of splicing, jointing, termination etc. of the cables.
- d) Type test reports on 11 KV, 6.6KV, 3.3 KV Power, LT FRLS Power & control, FS power and control cables
- e) Filled-up proposal particulars.

6.03.00 **To be submitted after award of contract**

6.03.01 Guaranteed Technical Particulars

6.03.02 Quality assurance plan

6.03.03 Shop Test reports

6.03.04 **Instruction manuals**

The manual shall clearly indicate method of laying, termination, check-ups and tests to be carried out before commissioning.

6.04.00 The bidder may note that the drawings, data and manuals listed herein are minimum requirement only. The bidder shall ensure that all other necessary write-up, information, etc required to fully describe the cable are to be submitted with the bid.

ANNEXURE-A

RATINGS AND REQUIREMENTS HV POWER CABLES (11 KV, 6.6KV & 3.3 KV)

- 1.0 11000/11000V, 6600/6600V & 3300/3300V grade 90°C continuous rating under normal condition and 250°C rating under short circuit condition heavy duty XLPE power cable suitable for use in 11000V/6600V/3300V non-effectively earthed system conforming to following requirement and in line with IS-7098, IS-8130, IS-5831 & IS-3975, manufactured by Triple Extrusion Dry Cure (CCV) process using pressurized Nitrogen.
- 1.1 Conductor : Stranded and compacted aluminium conductor of grade H2 & class 2 for all sizes, generally conforming to IS: 8130.
- 1.2 Conductor Screen : Extruded semi-conducting compound.
- 1.3 Insulation : Extruded cross linked polyethylene (XLPE) conforming to IS: 7098 (Part-2)
- 1.4 Insulation Screen : Extruded semi-conducting compound with a layer of non-magnetic metallic tape. For single core armoured cables, the armouring shall constitute the metallic part of screening. The semi-conducting tape shall be easily strippable.
- 1.5 Core Identification : By coloured strips applied on (For three core cables) cores or by numerals.
- 1.6 Inner Sheath : Extruded HRPVC/FRLS compound conforming to type ST2 of IS: 5831 for three core cables. Single core cables shall have inner sheath. Filler material shall also be of type ST2 PVC.
- 1.7 Armour : Galvanised single round steel wire armour for twin and multicore cables.

Non-magnetic hard drawn aluminum single round wire conforming to H4 of IS-8130 latest for single core cables
- 1.8 Overall Sheath : Extruded FRLS HRPVC compound conforming to type ST2 of IS: 5831.
- 1.9 Drum : Steel Drum

EQUIPMENT SPECIFICATION

2.1 GENERAL:

The section covers the broad technical specifications of 11kV cable system complete with accessories and spares etc. The cable and accessories shall also be designed for maximum reliability and acceptability.

2.2 APPLICABLE STANDARDS:

The materials shall conform to the latest editions of the following Indian/International Standards (latest edition) :

IEC 60502 Part1	Power cables with extruded insulation and their accessories for rated voltages from 1kV up to 30kV
IS 7098 Part 2	: XLPE insulated PVC sheathed cables For working voltages from 3.3 kV up to and including 33 kV
IS 13573	Cable accessories for extruded power cable from 3.3kV (UE) up to and including 33kV (E)
IEC 60331	Tests for electric cables under fire conditions
IEC 60332	Tests for electric and optical fibre cables under fire conditions
IS 1554	Specification for PVC insulated (heavy duty) Electric Cables
IS 5831	1984 PVC Insulation and Sheath of electric Cables
IS 8130:	Conductors for insulated electric cables and flexible cords.
IS 613:	Copper rods and bars for electrical purposes
IS 3975:	Mild steel wires, formed and tapes for armouring of cable.
IS 10810:	Method of tests for cables.
IEEE-383:	Standard for type test of class IE electric cables, field splices, and connections for nuclear power generating stations.
ASTM-D2843,	Standard test method for density of smoke from burning or decomposition of plastics.
ASTM-D2863,	Standard test method for measuring minimum oxygen concentration to support candle - like combustion of plastics (oxygen index).
NEMA-WC5,	Thermoplastic Insulated Wire and cable for the transmission and distribution of Electrical Energy.
IEC:754 (Part-1):	Test on gases evolved during combustion of electric cables - Determination of the amount of halogen acid gas evolved during

Technical Specification for 11kV cable and accessories

combustion of polymeric materials taken from cables.

IEC:332

Test on electric cables under fire conditions

(Part I):
IS 3961Test on a single vertical insulated wire or cable.
Recommended current rating for cables –

(Part II):

PVC insulated and PVC sheathed heavy duty cables.

IS 10418:

Drums for electric cables.

IS 1255

Code of practice for installation and maintenance of power cables
up to and including 33kV rating.**2.3 GENERAL REQUIREMENTS:**

Cables shall be designed to withstand the mechanical, electrical and thermal stresses under the unforeseen steady state and transient conditions and shall be suitable for proposed method of installation. Conductor shall be of uniform, of good quality, free from defects. Insulation shall be Cross Linked Polyethylene (XLPE). Technical parameters as per section 1

HT cables shall be manufactured by triple extrusion dry cured (CCV) process using pressurized nitrogen.

FOR TERMINATION KITS-

1	Voltage grade:	11/11 kV (UE)
2	Application:	Outdoor
3	Type:	Heat Shrinkable
4	Type testing conforming to	As per IS: 13573
5	Make	To purchaser's approval
6	Total shrouding of all live parts required	Yes

STRAIGHT THROUGH JOINTING KITS-

1	Voltage grade:	11/11 kV (UE)
2	Type:	Heat Shrinkable
3	Testing requirement conforming to	As per IS: 13573
4	Make:	To purchaser's approval

2.4 CABLE DRUMS:

Immediately after the inspection, both ends of each cable length shall be sealed by means of end caps in the presence of the inspector. Cable drums shall be of rugged construction, with a drum diameter of ample dimensions to accommodate cables. The drum cable length shall be chosen considering the lengths to be laid at site.

Cables shall be supplied in non-returnable heavy construction drums. All wooden parts shall be manufactured from seasoned wood treated with copper naphthenates/ zinc naphthenates (refer IS: 401). All ferrous parts shall be treated with suitable rust protective finish or coating to avoid rusting during transit and storage. BIS certification mark shall be stamped on each cable drum.

2.5 TESTS:

The cables and cable accessories shall be subjected to tests as per applicable standards in the presence of Customer /BHEL and/ or their authorized representatives. After installation, the cables shall also be subjected to tests at sites. Following test but not limited to this as mentioned below shall be conducted on cables as per latest IEC/IS.

<u>S. No.</u>	<u>TEST</u>	<u>APPLICABLE FOR</u>	<u>TEST CONDUCTION REQUIRED AS</u>	<u>REMARKS</u>
1.0	Tests for Conductor			
I.	Annealing test	For copper conductor only	T, A	<i>Internal in process Test Report to be furnished for acceptance test</i>
II.	Tensile test	For aluminium conductor only	T, A	
III.	Wrapping test	For aluminium conductor only	T, A	
IV.	Resistance test	For Al/Cu	T, A, R	
2.0	Tests for Armour Wires/Strips			
I.	Measurement of dimensions	Applicable for Aluminium wire & GS wire/Strip	T	
II.	Tensile test	Applicable for Aluminium wire & GS wire/Strip	T, A	
III.	Elongation at break test	Applicable for GS wire/Strip only	A	
IV.	Torsion test	For GS round wire only	A	
V.	Winding test	For GS strip only	A	
VI.	Resistivity test	Applicable for Aluminium wire & GS wire	A	

Technical Specification for 11kV cable and accessories

S. No.	TEST	APPLICABLE FOR	TEST CONDUCTION REQUIRED AS	REMARKS
VII.	Uniformity of Zinc coating test	For G. S. wires/Strip only	A	
VIII.	Mass of Zinc coating test	For G. S. wires/Strip only	A	
IX.	Wrapping Test	For Aluminium wires only	A	
3.0	Physical Tests for XLPE Insulation & PVC sheath			
I.	Test for thickness	Applicable for XLPE insulation, PVC inner sheath & PVC outer sheath	T, A	
II.	Tensile strength and elongation test at break	Applicable for XLPE insulation & PVC outer sheath		
(a)	Before ageing		T, A	
(b)	After ageing		T, A	
III.	Ageing in air oven	Applicable for XLPE insulation & PVC outer sheath	T	
IV.	Loss of mass in air oven test	For PVC outer sheath only	T	
V.	Hot deformation test	For PVC outer sheath only	T	
VI.	Heat shock test	For PVC outer sheath only	T	
VII.	Shrinkage test	For XLPE insulation & PVC outer sheath only	T	

Technical Specification for 11kV cable and accessories

S. No.	TEST	APPLICABLE FOR	TEST CONDUCTION REQUIRED AS	REMARKS
VIII.	Thermal stability test	For PVC outer sheath only	T	
IX.	Hot set test	For XLPE insulation only	T, A	
X.	Water absorption (gravimetric) test	For XLPE insulation only	T	
4.0	FRLS Tests			
I.	Oxygen index test	For PVC outer sheath only	T, A	
II.	Smoke density test	For PVC outer sheath only	T, A	
III.	Acid gas generation test	For PVC outer sheath only	T, A	
5.0	Flammability Tests			
I.	Flammability test to IEC-60332 Part-3-23, Cat-A for bunched cables (Flammability test to IS: 7098-II Category C2)	For complete cable	A	Shall be conducted on one sample only/ lot
II.	Flammability test to IEC:60332 Part-1 for Single cable (Flammability test to IS: 7098-II Category C2)	For complete cable	T	Shall be conducted on one sample only/ lot
III.	Swedish chimney test to SEN SS 424 1475	For complete cable	A	Shall be conducted on one sample only/ lot
IV.	Flammability test to IEEE: 383	For complete cable	A	Shall be conducted on one sample only/ lot

Technical Specification for 11kV cable and accessories

S. No.	TEST	APPLICABLE FOR	TEST CONDUCTION REQUIRED AS	REMARKS
6.0	Electrical Tests			
I.	High Voltage Test	For complete cable	T, A, R	
II.	Insulation Resistance Test (Volume resistivity method)	For complete cable	T, A	
III.	Partial discharge test (shall be carried out on full drum length)		T,A,R	
IV.	Bending Test followed by Partial Discharge test		T	
V.	Dielectric Power Factor Test (i) As a function of voltage (ii) As a function of temperature	Applicable for 6.35/11kV & above only	T	
VI.	Heating Cycle Test		T	
VII.	Impulse Withstand Test	Applicable for 6.35/11kV & above only	T	
7.0	Special Tests			
a)	UV Radiation test as per BS EN ISO 4892-2	For PVC outer sheath	A	Shall be conducted on one sample for entire contract. Duration of UV Radiation test shall be 14 Days
b)	Anti-rodent and Termite Repulsion test	For PVC outer and inner sheath only	A	Shall be conducted on one sample only/ lot
c)	Anti-Fungal Test	For PVC outer and inner sheath only	A	-do-

Legend – Type test –T, Acceptance test –A, Routine test –R

Note-

- 1) Test requirements for cable as per latest standard (i.e 7098-II) shall be considered, even if the same are not indicated above.
- 2) All applicable type test reports on cable accessories as per **IS: 13573 / VDE 0278** shall be submitted for approval .
- 3) Routine testing shall be conducted in line with the applicable standards and as per the Manufacturing Quality Plan approved for the project for every lot offered for inspection.
- 4) Cost of conduction of routine and acceptance testing shall be deemed to have been included in the quoted supply prices.
- 5) Cost of cables consumed for testing shall be to bidder's account.

2.6 Drawing /document to be submitted :

By Successful Bidder following drawings/documents of cable and accessories to be submitted for approval during contract stage.

- a. GTP
- b. Cross-section drawings
- c. Manufacturing Quality Plan
- d. List of sub-vendors/ suppliers of raw materials
- e. Type Test Reports
- f. Field Quality Plan
- g. Technical catalogues/ literature for the cables.
- h. Short circuit calculation for metallic screen and armor coverage percentage of cable .
- i. Drum drawing of cable

SECTION-3

3.0 GENERAL

This section stipulates the General Technical Requirements under the Contract and will form an integral part of the Technical Specification. The provisions under this section are intended to supplement general requirements for the materials, equipments and services covered under other respective sections and are not exclusive. However in case of conflict between the requirements specified in this section and requirements specified under other sections, the requirements specified under respective sections shall hold good.

3.1 PROJECT INFORMATION AND SYSTEM PARAMETERS

a)	Customer/ Purchaser/ Owner	Gujrat State Electricity Corporation Ltd. Vadodara
b)	Consultant	Development Consultants Pvt. Ltd., Kolkata - 700 091
c)	Project Title	400kV Switchyard Extension and 400 kV Switchyard for GIS for 1x800 MW Supercritical Thermal Power Project
d)	Location	Wanakbori is connected with roads by the National Highway, NH-8 (about 10 km from plant -Dakor-Godhra) and state highway SH-59 (about 2 km from plant -Balasinor- Sevalia). Wanakbori is connected with railways by Ahmedabad-Vadodara main Broad Guage line of Western Railway (about 8 km from Sevalia). Nearest Airports are Vadodara at distance of 85 Km from site and Ahemedabad at a distance of 100 Km from the Site.
e)	Elevation above MSL	72.0 meters
f)	Transport Facilities	Road/Rail, Nearest railway station is Sevalia. Nearest Airports are Vadodara at distance of 85 Km from site and Ahemedabad at a distance of 100 Km from the Site.
g)	Postal Address	To follow

METEOROLOGICAL DATA OF SITE IS GIVEN BELOW

a)	Max. daily average temp	34 °C
b)	Min. daily average temp	11.7 °C
c)	Max. Ambient air temp. (daily)	34°C
d)	Max. Ambient air temp. (yearly)	30°C
e)	Max. Ambient air temp.	42°C
f)	Wet bulb temperature	28°C
g)	Design ambient temp. for all electrical equipment	50°C
h)	Wind Design	Basic Wind Speed, Vb = 39m/s

i)	Pollution Severity	Highly Polluted
j)	Seismic Criteria	III
k)	Relative Humidity	100%
l)	Average annual rainfall	750 mm

SITE PROFILE

Location	Wanakbori, District-Kheda, Gujarat
Access by – nearest railway station	Ahmedabad – Vadodara Main Broad Gauge line, Sevaliya (8 KM)
Nearest Airport	Ahmedabad and Vadodara
Nearest sea port	Kandla
Access by Road	10KM from Godhra NH No.8; 02 KM from Balasinor-Sevaliya SH No.59
Major Towns / Cities	13KM from Balasinor and 10KM from Sevaliya
Availability of Land	Within existing Thermal Power Station
Latitude	22° -52'N
Longitude	73° -21'E
Altitude	80Meters from mean sea level for existing Units 70Meters from mean sea level for 800MW Unit 8

3.2 EVACUATION OF POWER

For evacuation of power through outgoing line feeders, 400 KV transmission lines established by GETCO between the proposed power plant and existing 400 KV substation of GETCO. The interface point between this switchyard and 400 KV transmission lines of GETCO will be at the take off gantry structures inside the switchyard fence.

Following title block shall be included in all documents for submission

3.4 SYSTEM PARAMETERS

Nominal system voltage	400 kV
Highest system voltage	420 kV
Rated lightning impulse withstand voltage	a) ± 1425 kVp between live terminals and earth. b) ± 1665 kVp impulse on one terminal and other terminal earthed (across isolating distance).
Rated one minute power Frequency withstand voltage	630kVrms
Rated switching impulse withstand voltage	1050 kVp (Phase to earth) 1575 kVp (Phase to Phase)
Corona extinction voltage	320 kV
Frequency	50 Hz
Rated short time withstand current capacity	40 kA for 3 sec
Creepage distance	31mm/kV
System Earthing	Effectively Earthed

3.5 AUXILIARY POWER SUPPLY

3 phase A.C power supply	415V, 50 Hz, 3-phase 4 wire, solidly earthed with variation in frequency of +3/-5% and variation in voltage +/-10%. For motors above 200W up to 160 KW. Fault level 50 KA symm.
1 phase A.C power supply	240V, 50 Hz, 1-phase, 2 wire, AC supply with variation in frequency of +/-5% and variation in voltage +/-10%. For motors up to 200W, Lighting, space heating, A. C. control & protective devices.
D.C. power supply	220V(variation from 190V to 240V) , 2-wire ungrounded 50V, 2 wire system (+) earthed. D.C. Supply Voltage : 187 to 242 Volt for 220VDC. For D.C. alarm, control & protective devices. Fault level 25* KA (Minimum) * Indicative only; the actual value will be decided by the bidder, after substantiating the same by calculation.
Combined variation of voltage and frequency for AC supply shall be +/- 10%	

3.6 GENERAL CONDITIONS

3.6.1 NAME PLATES (RATING PLATES)

Instruction plates, name plates or labels shall be permanently attached to each main and auxiliary item of plant in a conspicuous position. These plates shall be engraved with the identifying name,

type and manufacturers serial number, together with the loading conditions under which the item of plant has been designed to operate.

Items such as valves, etc. which are subject to hand operation, shall be provided with nameplates so constructed as to remain clearly legible throughout the life of the plant giving due consideration to the difficult climatic conditions to be encountered. Nameplates shall be securely mounted where they will not be obscured in service by insulation, cladding, actuators or other equipment. Direction of flow is also to be engraved.

All trade nameplates and labels shall be in English language. All The size and location of nameplates shall be subject to approval of the Engineer.

3.6.3 Latent Defects:

Notwithstanding the issue of the Take Over Certificate, the Contractor shall be responsible for making good with all possible speed any Latent Defect in any Works /equipment of the plant which appears at any time before the expiry of defect liability period. And shall remedy such defect at its own cost and expense. The latent defect liability period shall be a minimum of 5 years from the end of defect liability period. The defects to which this applies are defects in design, materials or workmanship or defects arising from any act or omission of the Contractor done or omitted prior to Take-over of the portion of the Plant affected by the defects or during the Warranty Period which a reasonable examination at the end of the Warranty Period would not have disclosed.

3.8 OPERATION, MAINTENANCE & AVAILABILITY CONSIDERATIONS

- 3.8.1 Equipment/works offered shall be designed for high availability, high reliability, low maintenance and ease of operation & maintenance. The Bidder shall specifically state the design features incorporated to achieve high degree of reliability, availability, operability and ease of maintenance. He shall also furnish details of availability records in plants stated in his experience list.
- 3.8.2 Ample space for ease of operation and maintenance including equipment removal, tube bundle/cartridge/rotor pulling etc. shall be provided. All valves, gates, dampers and other devices shall be located and oriented in such a way that they are accessible from operating floor levels. Where this cannot be adhered to, platforms and walkways with access ladders shall be provided to facilitate operation and maintenance.
- 3.8.3 Motorized lifting devices, i.e. hoists, chain pulleys, jacks, etc. shall be provided for handling and carrying out maintenance of any equipment and/or part having weight in excess of 3000 Kg. Suitable beams, hooks etc. for this purpose shall be provided in the buildings. No lifting arrangement is necessary for part having weight less than 500 Kg. Hoist shall be well protected by environment. Suitable painting and coating covering hoist at outdoor shall be provided. Lifting devices like lifting tackles, slings, etc. to be

connected to hook of the hoist/crane shall be provided by the Bidder for lifting the equipment, accessories covered under this specification.

- 3.8.4 All similar parts of the equipment shall be made to gauge and shall be interchangeable with and shall be made of same material and workmanship as the corresponding parts of the equipment. Where feasible common components shall be employed in different pieces of equipment in order to optimize the spares inventory and utilization.

3.9 MATERIALS

- 3.9.1 In selecting materials of construction of equipment, the Contractor shall pay particular attention to the atmospheric conditions existing at the Site and the nature of material/fluid handled. Wherever deviations are taken in respect of materials specified, the reasons shall be spelt out clearly in the proposal.

All materials shall be new, and shall be of the quality most suited to the proposed application.

- 3.9.2 In as far as is possible; materials shall be in accordance with Indian or international standard specifications and shall be used in accordance with Indian or international codes of practice. Where such standards or codes of practice are not available sufficient information shall be provided to allow the Engineer to assess the suitability of the material for the particular application. All materials used shall have performed lengthy satisfactory service in similar or more arduous conditions to those proposed by the Contractor.

All parts which could deteriorate or corrode under the influence of the atmospheric, meteorological or soil conditions at the Site, or under the influence of the working conditions shall be suitably and effectively protected so that such deterioration or corrosion is a minimum over the life of the plant.

- 3.9.3 Spare parts for equipment shall be interchangeable with the original components and, so far as possible, be of common design and manufacture.

- 3.9.5 All similar standard components/parts of similar standard equipment provided shall be interchangeable with one another. Further identical equipments shall be provided for similar duties so that the same are interchangeable with one another in totality and component wise.

- 3.9.6 All heavy parts (500 Kg and above) must be provided with a convenient arrangement for slinging and handling during erection and overhaul. Any item of plant normally stripped or lifted during periods of maintenance and weighing one tonne or above, shall be clearly marked with its weight.

3.10 PACKAGING & MARKING

All the equipment shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at site till the time of erection. While packing all the materials, the limitations from the point of view of availability of railway wagon sizes in India

should be taken account of. The details of various wagons normally available with Indian Railways for transportation of heavy equipment shall be considered by the Bidder. The Contractor shall be responsible for all loss or damage during transportation, handling and storage due to improper packing. As per the information available, the dimensions of OD consignment for transportation of the equipment by rail (if any equipment to be handled through rail transportation) are as below:

- a) Width of the Package: 3.2 Meters (from centre-line of rails- 1.6 meters on both sides)
- b) Height of the package from rail top: 4.47 Meters

The above indicates the dimensions which can be normally transported on the wagons without infringement of the "moving gauge". This is however not indicative of the consignment which can be carried out with infringement of "moving gauge" duly authorized and approved by the Indian Railways. There may be difference between the "moving gauge" and the "fixed structure gauge" and consignments infringing the "moving gauge" can be moved after investigation regarding possible infringement with the fixed structures. As the critical fixed structures in each route are different, consignments infringing moving dimensions have to be individually investigated to select a route and also determine the restrictions under which such movement is to be carried out. Such routes selected or other mode of transport envisaged is to be clearly brought out in the proposal wherever transport of over dimensional equipment is involved.

Bidder to consider unloading of material delivered through rail transportation, at near by railway station/site unloading siding. The subsequent transportation up to project work place shall be considered by road only. All unloading and handling equipment both at railway station siding and at project

site shall be arranged by the Bidder. Necessary arrangement to be organized with the railway authority for such purpose shall also be under the scope of services if the Bidder. Bidder may consider entire material delivered up to site through rail transportation only. The identification marking indicating the name and address of the consignee shall be clearly marked in indelible ink on two opposite sides and top of each of

the packages. In addition the Contractor shall include in the marking gross and net weight, outer dimension and cubic measurement. Each package shall be accompanied by a packing note (in weather proof paper) quoting specifically the name of the Contractor, the number and date of contract and names of the

office placing the contract, nomenclature of contents and Bill of Material. For imported equipment and material, suitable port facilities may be used in which case material may be transported from the port by tractor-trailer. Bidder may consider this aspect.

3.11 PROTECTION

Equipment having antifriction or sleeve bearings shall be protected by weather tight enclosures. Coated surfaces shall be protected against impact, abrasion, discoloration and other damages. Surfaces that are damaged shall be repainted.

Electrical equipment, controls and insulations shall be protected against moisture and water damages. All external gasket surfaces and flange faces, couplings, rotating equipment shafts, bearings and like

items shall be thoroughly cleaned and coated with rust preventive compound as specified above and protected with suitable wood, metal or other substantial type covering to ensure their full protection. All exposed threaded parts shall be greased and protected with metallic or other substantial type protectors.

All piping, tubing and conduit connections on equipment and other equipment openings shall be closed with rough usage covers or plugs. Female threaded openings shall be closed with rough usage covers or forged steel plugs. The closures shall be taped to seal the interior of the equipment. Open ends of piping, tubing and conduit shall be sealed and taped. Returnable containers and special shipping devices shall be returned by the manufacturer's field representative at the Contractor's expense.

3.12 PAINTING

3.12.1 GENERAL

All exposed metallic surfaces subject to corrosion shall be protected by shop application of suitable coatings. Surfaces not easily accessible after shop assembly shall be treated before-hand and protected for life of the equipment. Surfaces to be finish painted after installation shall be shop painted with at least

two (2) coats of primer. Steel surfaces, which are not to be painted, shall be coated with suitable rust preventive compound subject to the approval of the Owner. All paints shall be used in accordance with the manufacturer's instructions. No thinners or other substance shall be added to the coating material without the approval of the Engineer. The quality and vendor of the paints shall require approval of the Owner.

All paints, when applied in a normal full coat, shall be free from runs, sags, wrinkles, patchiness, brush marks or other defects.

All primers shall be well marked into the surface, particularly in areas where pitting is evident, and the first priming coat shall be applied as soon as possible after cleaning, within four hours maximum. The paint shall be applied by brush, roller or airless spray, according to the manufacturer's instructions.

Spray

painting shall be carried out by operators trained and thoroughly experienced in the use of the equipment. If the drying interval between successive coats, which should not exceed one week, has been so long as to endanger the adhesion of the following coat, the paint already applied shall be lightly rubbed down with fine abrasive paper before putting on the next coat. Paint spraying on large surfaces shall not normally be done indoors, except with the approval of the Engineer. Spray guns shall not be used outdoors in

windy weather or near unprotected surfaces of a contrasting color and under no circumstances shall spray guns be used where spray may be carried into or onto exposed electrical equipment. Paint containers shall not be opened until required and the paint shall be mechanically mixed thoroughly before use, and agitated occasionally during use. Electrical equipment shall be shop finished with one or more coats of primer and two coats of high-grade oil resistant enamel. The interior of all panels' cabinets and enclosures shall be finished with gloss white enamel.

The Contractor shall furnish sufficient touch-up paint for one complete finish coat on all exterior

factory surfaces of each item of equipment. The touch-up paint shall be of the same type and colour as the factory applied paint and shall be carefully packed to avoid damage during shipment. Complete painting

instructions shall be furnished. Shop primer for steel and iron surfaces which will have a continuous operating temperature below 35 Deg.C shall be selected by the Contractor, in accordance to the relevant standard. Special high temperature primer shall be used on surface exposed to operating temperature above 35 Deg.C. The colour scheme shall be submitted during execution of contract for approval by the Purchaser/Engineer.

3.12.2 PREPARATION

Oil and grease shall be removed from the surface by washing with a suitable detergent, rinsing with clean water, and drying. Surfaces to be shot blasted shall be cleaned to Swedish Standard SA 2.5 or equivalent, and all dust remaining after cleaning shall be removed. The priming coat shall be applied without delay.

3.12.3 DAMAGED PAINTWORK

Any damaged paintwork shall be made good as follows:

- a) The damaged area, together with an area extending 25mm around its boundary, shall be cleaned down to bare metal.
- b) A priming coat shall be immediately applied, followed by a full paint finish equal to that originally applied and extending 50mm around the perimeter of the original damage.
- c) The repainted surface shall present a smooth surface. This shall be obtained by carefully chamfering the paint edges before and after priming.

3.12.4 PAINTING SYSTEMS

The requirements for the dry film thickness (DFT) of paint and the materials to be used shall be as stated below, unless otherwise specified elsewhere in this specification.

- a) Surfaces Subject To Weathering
All surfaces shall have a minimum of four coats of paint made up as follows:
Primer coat: 35 micron DFT
Tie coat: 35 micron DFT
Finishing coat (2 Nos.): 35 micron DFT per coat
The total minimum DFT shall be 140 micron.
- b) Surfaces Inside Buildings
All surfaces shall have a minimum of three coats of paint made up as follows:
Primer coat : 35 micron DFT
Tie coat : 35 micron DFT
Finishing coat (2 Nos.) : 25 micron DFT per coat
The total minimum DFT shall be 120 micron.
The type and colour of primer & finish coat shall be selected by the Contractor after approval by the Owner.

For detail painting on building & structural steel elements refer Section-IIG/1 & IIG/2 of this

specification.

3.12.5 COLOUR CO-ORDINATION & FINISH

- 3.12.5.1** Exterior surfaces throughout the plant shall be finished in colours and textures which will blend harmoniously together and with the surrounding landscape.
- 3.12.5.2** Interior surfaces throughout the plant shall be finished in colours and textures which will blend harmoniously together and which will be conducive to; the comfort, well-being and high productivity of the operators. Operating plant and services provided shall be colour coded for ease of identification.
- 3.12.5.3** All finishes shall be durable and as far as possible maintenance free. Finishes shall be easily cleaned.
- 3.12.5.4** Final colours and finishes shall be to the Approval of the Engineer.

3.13 NOISE LEVEL REQUIREMENT

The plant will be designed, constructed and provided with suitable acoustic measures to ensure the noise level criteria as per the following stipulations.

- a) Maximum noise level shall not exceed 85 dB (A) when measured at 1.0M away from the noise emission source.
- b) Maximum noise level from its source within the premises shall not exceed 70 dB (A) as per Environment (Protection) Rules 1986, Schedule-III, 'Ambient Air Quality Standards' in respect of noise.
- c) Any statutory changes in stipulations regarding noise limitation that may occur in future according to State Pollution Control Board or Central pollution Control Board or Ministry of Environment & Forest regulation during tenure of the contract, the contractor shall comply with the requirement.

3.14 INSPECTION AND TESTING

3.14.01 Inspection and Tests during Manufacture

- 3.14.02** The method and techniques to be used by the Contractor for the control of quality during manufacture of all plant and equipment shall be agreed with the Owner prior to the Award of Contract.
- 3.14.03** The Owner's general requirements with respect to quality control and the required shop tests are set out elsewhere in this specification.
- 3.14.04** Before any item of plant or equipment leaves its place of manufacture the Owner shall be given the option of witnessing inspections and tests for compliance with the specification and related standards.
- 3.14.05** Advance notice shall be given to the Owner as agreed in the Contract, prior to the stage of

manufacture being reached, and the piece of plant must be held at this stage until the Owner has inspected the piece, or has advised in writing that inspection is waived. If having consulted the Owner and given reasonable

notice in writing of the date on which the piece of plant will be available for inspection, the Owner does not attend the Contractor may proceed with manufacture having forwarded to the Owner duly certified copies of his own inspection and test results. The Contractor shall forthwith forward to the engineer duly certified copies of the Test Certificates in six copies (one to the Purchaser and five to the Consulting Engineer) for approval. Distribution of six (6) copies of Test Certificates for approval will be two(2) copies to owner and four(4) copies to consultant. These four(4) copies will be further distributed by consultant after approval to owner, site and bidder. One copy will be retained with the consultant for record purpose. Further, nine (9) copies of Shop Test Certificates shall be bound with Instruction Manuals referred to elsewhere. Distribution of nine (9) copies of Shop Test Certificates for approval will be Two (2) copies to owner, Three (3) copies to site, Two (2) copies to consultant, Two (2) copies to owner's library /record.

3.14.06 Under no circumstances any repair or welding of castings be carried out without the consent of the Engineer. Proof of the effectiveness of each repair by radiographic and/or other non-destructive testing technique, shall be provided to the Engineer.

3.14.07 All the individual and assembled rotating parts shall be statically and dynamically balanced in the works.

Where accurate alignment is necessary for component parts of machinery normally assembled on site, the Contractor shall allow for trial assembly prior to dispatch from place of manufacture.

3.14.08 All materials used for the manufacture of equipment covered under this specification shall be of tested quality. Relevant test certificates shall be made available to the Purchaser as per Owner's approved QAP. The certificates shall include tests for mechanical properties and chemical analysis of representative material.

3.14.09 All pressure parts connected to pumping main shall be subjected to hydraulic testing at a pressure of 150% of shut-off head for a period not less than one hour. Other parts shall be tested for one and half times the maximum operating pressure, for a period not less than one hour.

3.14.10 All necessary non-destructive examinations shall be performed to meet the applicable code requirements.

3.14.11 All welding procedures adopted for performing welding work shall be qualified in accordance with the requirements of Section-IX of ASME code or IBR as applicable. All welded joints for pressure parts shall be tested by liquid penetrant examination according to the method outlined in ASME Boiler and Pressure Vessel code. Radiography, magnetic particle examination magnuflux and ultrasonic testing

shall be employed wherever necessary/recommended by the applicable code. At least 10% of all major butt welding joints shall be radio graphed.

- 3.14.12** Statutory payments in respect of IBR approvals including inspection for design and manufacturer of equipment shall be made by the Bidder. All payment for erection and testing at site (i.e. under IBR jurisdiction) shall also be made by the Bidder. In such case Contractor's scope shall also be extended to preparation of all necessary documents, co-ordination and follow-up with IBR authorities for above approval.

3.15 PERFORMANCE TESTS AT SITE

- 3.15.01** The full requirements for testing the system shall be agreed between the Owner and the Bidder prior to Award of Contract. The completely erected System shall be tested by the Contractor on site under normal operating conditions. The Contractor shall also ensure the correct performance of the System under abnormal conditions, i.e. the correct working of the various emergency and safety devices, interlocks, etc.
- 3.15.02** The Bidder shall provide complete details of his normal procedures for testing, for the quality of erection and for the performance of the erected plant. These tests shall include site pressure test on all erected pipe work to demonstrate the quality of the piping and the adequacy of joints made at site.
- 3.15.03** The Contractor shall furnish the quality procedures to be adopted for assuring quality from the receipt of material at site, during storage, erection, pre commissioning to tests on completion and commissioning of the complete system/equipment.
- 3.15.04** For details of specific tests required on individual equipment refers to respective section of this specification

3.16 PACKING FOR SHIPMENT

- 3.16.01** The equipment complete with its accessories, spares, special tools and tackles shall be suitably protected by respective packing for shipment considering handling during transit, distance and weather conditions involved. The Contractor shall submit the packaging method for shipment to be adopted by him, if so desired by the Owner / Purchaser.
- 3.16.02** Each consignment shall be marked with Equipment name, Owner /Purchaser's name & address, Project details, handling instruction etc. It shall be complete with part list and identification details. The copies of the part list of each consignment shall also be furnished to the Owner / Purchaser after dispatch.
- 3.16.03** Equipment shall be packaged for transportation so as to meet the space and weight limitation of transport facilities. The contractor shall obtain approval from concerned authorities for transportation

of over dimensioned consignment/package, if any, before starting manufacture of such equipment.

3.17 TYPE & RATING OF EQUIPMENT

- 3.17.01** The number of types and sizes of motor, controls, and other electrical equipment shall be kept to a minimum so that the requirement of spares is minimized.
- 3.17.02** Equipment shall be rated for the load and duty cycle of the intended service Circuit breakers and fuses shall be rated to withstand and interrupt the maximum fault current at the point of application in the circuit.

3.18 TROPICAL PROTECTION

- 3.19.01** All electrical equipment, accessories and wiring shall have fungus protection involving special treatment of insulation and metal against fungus, insects and corrosion.
- 3.19.02** Fine mesh screen of corrosion resistant material shall be furnished on all ventilating openings to prevent entry of insects.

3.20 ELECTRICAL SWITCH BOARDS

3.20.01 GENERAL

Switchboards shall be dead-front, free-standing, vertical, cubicle/panel type, completely wired, having access doors with concealed hinges and locking type latches.

- 3.20.02** Panels shall be fabricated from minimum 1.6mm thick for non-load bearing members & 2 mm thick for load bearing members, CRCA (cold rolled continuously annealed) sheet steel, free from any surface imperfections and suitably reinforced to provide a sturdy and rigid assembly. Load bearing wall/covers/back covers shall be 2 mm thick and for non-load bearing the wall/cover/back cover shall be 1.6 mm thick.
- 3.20.03** Panels shall be adequately sized for installation of field cables and access for maintenance. The working zone shall be limited between 300 mm and 1800mm from floor level.
- 3.20.04** Each panel shall be provided with internal illumination lamp operated by door switch, thermostat controlled space heater with miniature circuit breaker (MCB)unit, and plug socket with MCB for hand lamp.
- 3.20.05** Removable eye bolt/lifting lugs shall be furnished on all panels.
- 3.20.06** Unless otherwise stated, equipment rating and module sizes shall be as per annexure B. Module selection chart is specified for guidance of bidder in respect to requirement of module space and component ratings.

3.21 EQUIPMENT MOUNTING

- 3.21.01** All instruments, switches etc. mounted on the front face of the panels shall be of flush type.
- 3.21.02** All equipment shall be so mounted that removal and replacement may be accomplished individually without interruption of service to others.
- 3.21.03** All equipment inside the panel shall be so located that their terminals and adjustments are readily accessible for inspection and maintenance. Adequate ventilation shall be provided in enclosed panel.
- 3.21.04** At least 20% with a minimum of one spare feeders of each type & rating shall be provided in MCC/Switch Board.

3.22 PANEL WIRING

- 3.22.01** All panels shall be fully wired at the factory to ensure proper functioning of all control, protection and interlock schemes. All wiring for external connections shall be brought to terminal blocks and numbered.
- 3.22.02** Panel wiring shall be carried out with flexible, 1100 grade, heat as well as fire resistance type PVC insulated stranded copper wire of minimum 2.5 Sq.mm(7/0.67mm) cross section.
- 3.22.03** Solder less compression/clamp type connection shall be used for wire terminals. Wiring shall be continuous between terminals without splicing. Each wire shall be identified at both ends with permanent markers having wire numbers as per approved wiring drawings.
- 3.22.04** All spare contacts of relays, aux. relays, contactors, aux. contactors, switches, push buttons etc. shall be terminated up-to external terminal block.
- 3.22.05** Terminal blocks shall be Box clamp type with marking strip. Not more than two wires shall be connected to one terminal. Spare terminal equal in number to 20% of active terminals shall be furnished.

3.23 GROUNDING

A copper ground bus for HT Switchgear and GI ground bus for LT boards, sized to carry maximum short circuit current, shall run along the entire length of panel structure and shall have terminal connector at each end for connection to station ground grid. Minimum size of ground bus shall be 75 X 10 sq. mm.

3.24 PAINTING

All metal surface shall be cleaned, phosphated and given two coats of rust-resistant primer followed by two coats of epoxy based finish paint. The shades for different equipment shall be as follows:

- a) For switchgears, MCCs, Distribution boards and other panels-Light Grey RAL 7032.
- b) For transformer –Battle ship Grey shade 632 of IS-5.

- c) For motors-Battle ship grey shade 632 of IS-5
- d) For generator isolated phase Bus duct enclosure –Inside shall be Matt Black & outside will be light grey shade RAL 7032 for indoor part and battle ship gray shade 632 of IS-5 for outdoor. All supporting steel structures shall be galvanised. HT and LT Bus duct shall be same as generator Bus duct.

3.25 NAME PLATE

Name plate of approved design shall be furnished on each panel and for each instrument or device mounted on panel. The material for name plate shall be 3 mm thick lamicoide or approved equal, with white letters on black background.

3.26 TESTS

Each panel shall be completely assembled, wired, adjusted and tested at the factory prior to shipment. The test shall include wiring continuity tests, insulation tests and functional tests to ensure satisfactory operation and control of individual equipment.

3.27 SPECIAL CABLES

Special cables for specific purpose, as required, shall be supplied and installed by the EPC Contractor.

3.28 CONDUITS

- 3.28.01** Conduits shall be of heavy gauge rigid steel, hot-dip galvanized, cut square, reamed, threaded and screwed tight at all joints.
- 3.28.02** Conduit entrances to pull boxes and switches shall have double lock nuts & insulating bushings. No running thread shall be used.
- 3.28.03** Flexible metallic conduit shall be used for connection to equipment, which are subject to vibration, and also for connection to level/limit/pressure switches.
- 3.28.04** HDPE PVC pipes shall be used for single core power cables.

3.29 SPECIFIC REQUIREMENT - SERVICES (DESIGN & INSTALLATION)

- 3.29.01** Methods and Workmanship
- 3.29.02** All equipment shall be installed in a first class, neat workmanlike manner by mechanics/electricians skilled in the trade involved.
- 3.29.03** The erection work shall be supervised by competent supervisors holding relevant supervisory license from the Government.

3.29.04 All details on installation shall be electrically and mechanically correct.

3.29.05 The installation shall be carried out in such a manner as to preserve access to other equipment installed.

3.30 PROTECTION OF WORK

3.30.01 For protection of this work, the Contractor shall provide fencing and lighting arrangement, connect space heaters and provide heating arrangement as necessary or as directed by the Owner/Consultant.

3.31 ANNEXURE-B: MODULE SELECTION

MOTOR FEEDER

Type Motor Rating MCCB Rating Contactor Cable size

AU/AR 0 - 5.5 KW 32A 16A 3/c - 2.5 Sq.mm - Cu

BU/BR 5.6 - 11 KW 63A 32A 3/c - 16 Sq.mm - Al

CU 11.1 - 22 KW 63A 63A 3/c - 35 Sq.mm - Al

DU 22.1 - 50 KW 100A 100A 3/c - 95 Sq.mm - Al

EU 50.1 - 75 KW 200A 160A 3/c - 185 Sq.mm - Al

FU 75.1 - 110 KW 400A 300A 2 x 3/c - 185 Sq.mm - Al

NOTE :

1. MCCB with short circuit release, thermal overload relay with SPP feature, Contractor are to be co-ordinate (Type-2) with motor rating by the Contractor.

2. "U" stands for Unidirectional and "R" for Reversible drives.

OUTGOING FEEDER

Type MCCB Rating Cable Size

AF 32A 4/c - 16 Sq.mm - Cu

BF 63A 4/c - 35 Sq.mm - Al

CF 100A 3.1/2 - 95 Sq.mm - Al

DF 200A 3.1/2 - 300 Sq.mm - Al

EF 400A 4 x 1/c - 630 Sq.mm - Al

Note: Cable sizes as indicated above are indicative. However EPC contractor shall submit the sizing calculation of cable and select the cable accordingly.

3.32 ANNEXURE-C: TECHNICAL PARAMETERS FOR ELECTRICAL SYSTEM

L.V. SYSTEM DATA

1	Nominal 3 phase voltage to be selected for L.V. system	415 V
2	Type of Breaker to be selected	Air break
3	Type of outgoing feeder switching device in L.T. MCC	MCCB
4	M.C.C. type	Single front/Double front Fully draw out type
5	Short circuit level for 1 sec	50 KA

DC. SYSTEM DATA

1	Nominal voltage to be selected for DC system	220 V
2	Type of Incoming / outgoing feeder switching device	Double pole Switch-Fuse
3	DCDB type	Single front/Double front Fully draw out type
4	Short circuit level for 1 sec	To be decided by Bidder 25 KA (minimum)

UPS SYSTEM DATA

1	Nominal voltage to be selected for UPS system	240 V, 1-Ph, 50 Hz, AC
2	Type of Incoming / outgoing feeder switching device	MCCB
3	UPSDB type	Single front, Fixed type, Modular construction
4	Short circuit level for 1 sec	To be decided by bidder 25 KA (minimum)

3.33 CODES AND STANDARDS

All materials and equipment shall generally comply in all respect with the latest edition of relevant international electro-technical commission (IEC) or any other internationally accepted standard which ensure equal or better quality or relevant Indian standard(IS) mentioned against each equipment and this specification.

3.34 MATERIAL/WORKMANSHIP

3.34.01 General Requirement

Where the specification does not contain characteristics with reference to workmanship, equipment, materials and components of the covered Equipment it is understood that the same must be new, of highest grade of the best quality of their kind conforming to best engineering practice and suitable for the purpose for which they are intended.

The design of the Works shall be such that installation, future expansions, replacements and general maintenance may be undertaken with a minimum of time and expenses. Each component shall be designed to be consistent with its duty and suitable factors of safety, subject to mutual agreements and shall be used throughout the design. All joints and fastenings shall be devised, constructed and documented so that the component parts shall be accurately positioned and restrained to fulfill their required function. In general screw threads shall be standard metric threads. The use of other thread forms will only be permitted when prior approval has been obtained from purchaser.

Whenever possible, all similar part of the Works shall be made to gauge and shall also be made interchangeable with similar parts. All spare parts shall be interchangeable with, and shall be made of the same materials and workmanship as the corresponding parts of the Equipment supplied under the

Specification. Where feasible, common component units shall be employed in different pieces of equipment in order to minimize spare parts stocking requirements. All equipment of the same type and rating shall be physically and electrically interchangeable.

All materials and equipment shall be installed in strict accordance with the manufacturer's recommendation(s). Only first-class work in accordance with the best modern practices will be accepted. Installation shall be constructed as being the erection of equipment at its permanent location. This, unless otherwise specified, shall include unpacking, cleaning and lifting into position, grouting, leveling, aligning, coupling of or bolting down to previously installed equipment bases/foundations, performing the alignment check and final adjustment prior to initial operation, testing and commissioning in accordance with the manufacturer's tolerances and instructions and the Specification. All factory assembled rotating machinery shall be checked for alignment and adjustments made as necessary to re-establish the manufacturer's limits suitable guards shall be provided for the protection of personal on all exposed rotating and / or moving machine parts and shall be designed for easy installation and removal for maintenance purpose. The spare equipment(s) shall be installed at designated locations and tested for healthiness.

The Contractor shall apply oil and grease of the proper specification to suit the machinery, as is necessary for the installation of the equipment. Lubricants used for installation purposes shall be drained out and the system flushed through where necessary for applying the lubricant required for operation. The Contractor shall apply all operational lubricants to the equipment installed by him.

All oil, grease and other consumables used in the Works/ Equipment shall be purchased in India unless the Contractor has any special requirement for the specific application of a type of oil or grease not available in India. In such is the case he shall declare in the proposal, where such oil or grease is available. He shall help purchaser in establishing equivalent Indian make and Indian Contractor. The same shall be applicable to other consumables too.

3.34.02 PROVISIONS FOR EXPOSURE TO HOT AND HUMID CLIMATE

Outdoor equipment supplied under the specification shall be suitable for service and storage under tropical conditions of high temperature, high humidity, heavy rainfall and environment favorable to the growth of fungi and mildew. The indoor equipments located in non-air conditioned areas shall also be of same type.

3.34.02 COLOUR SCHEME AND CODES FOR PIPE SERVICE

All steel structures, plates etc shall be painted with non-corrosive paint on a suitable primer. It may be noted that normally all electrical equipment in switchyard are painted with shade 631 of IS-5. All The indoor cubicles shall be of same colour scheme and for other miscellaneous items, colour scheme will be approved by the purchaser.

3.34.03 PROTECTION

All coated surfaces shall be protected against abrasion, impact, discoloration and any other damages. All exposed threaded portions shall be suitably protected with either a metallic or a non-metallic protecting device. All ends of all valves, pipings and conduit equipment connections shall

be properly sealed with suitable devices to protect them from damage.

All equipment accessories and wiring shall have fungus protection, involving special treatment of insulation and metal against fungus, insects and corrosion. The parts which are likely to get rusted, due to exposure to weather should also be properly treated and protected in a suitable manner. Screens of corrosion resistant material shall be furnished on all ventilating louvers to prevent entry of insects.

3.34.04 FUNGISTATIC VARNISH

Besides the space heaters, special moisture and fungus resistant varnish shall be applied on the parts, which may be subjected or predisposed to the formation of fungi due to the presence or deposit of nutrient substances. The varnish shall not be applied to any surface of part where the treatment will interface with the operation or performance of the equipment. Such surfaces or parts shall be protected against the application to the varnish.

3.34.05 SURFACE FINISH

All interiors and exteriors of tanks, control cubicles and other metal parts shall be thoroughly cleaned to remove all rust, scales, corrosion, greases or other adhering foreign matter. All steel surfaces in contact with insulating oil as far as accessible, shall be painted with not less than two coats of heat resistant, oil insoluble, insulating paints.

All metal surfaces exposed to atmosphere shall be given two primer coats of zinc chromate and two coats of epoxy paint with epoxy base thinner. All metal parts not accessible for painting shall be made of corrosion resisting material. All machine finished or bright surfaces shall be coated with a suitable preventive compound and suitably wrapped or otherwise protected. All paints shall be carefully selected to withstand tropical heat and extremes of weather within the limit specified. The paint shall not scale off or wrinkle or be removed by abrasion due to normal handling. All external painting shall be as per shade no. 631 of IS:5.

3.34.06 GALVANIZING

All ferrous parts including all sizes of nuts, bolts, Plain and spring washers, support channels, structures, shall be hot dip galvanised conforming to latest version of IS:2629 or any other equivalent authoritative standard. However, hardware less than M12 size shall be electro-galvanized. Minimum weight of zinc coating shall be 610 gm/sq.mm and minimum thickness of coating shall be 85 microns for all items thicker than 6mm. For items lower than 6 mm thickness, requirement of coating shall be as per relevant ASTM.

3.34.07 PACKING

The following details are to be clearly indicated in the material forwarding documents:

- a) Name and address of the consignee.
- b) Purchase order number.
- c) Name of supplier/s.
- d) Description of equipment / material.
- e) Net weight.
- f) Gross weight.

All the equipments shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at Site till the time of erection. On request of the purchaser, the Contractor shall also submit packing details/associated drawing for any equipment material under his scope of supply, to facilitate the purchaser to repack any equipment/material at a later date, in case the need arises. Any material found short inside the packing cases shall be supplied by the supplier without any extra cost. The cases containing easily damageable material shall be very carefully packed and marked with appropriate caution symbol i.e. fragile, handle with care, use no Hooks etc.

3.34.08 HANDLING, STORING AND INSTALLATION

Contractor may engage manufacturer's Engineers to supervise if required for unloading, transportation to site, storing, testing and commissioning of the various equipment being procured by them separately. In case of any doubt/misunderstanding as to the correct interpretation of manufacturer's drawings or instructions, necessary clarifications shall be obtained from the purchaser. Contractor shall be held responsible for any damage to the equipment consequent to not following manufacturer's drawings/instructions correctly.

Where assemblies are supplied in more than one section, contractor shall make all necessary mechanical and electrical connections between sections including the connection between buses. Contractor shall also do necessary adjustments/alignments necessary for proper operation of circuit breakers, isolators and their operating mechanisms. All components shall be protected against damage during unloading, transportation, storage, installation, testing and commissioning.

Contractor shall be responsible for examining all the shipment immediately of any damage, shortage, discrepancy etc. for the purpose of Purchaser's information only. Any demurrage, pilferage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor. The Contractor shall be fully responsible, for the equipment/material until the same is handed over to the purchaser in an operating condition after commissioning.

The minimum phase to earth, phase to phase and section clearance along-with other technical parameters for the various switchyard voltage levels to be maintained shall be strictly as per the approved drawings.

The design and workmanship shall be in accordance with the best engineering practices to ensure satisfactory performance throughout the service life. If at any stage during the execution of the Contract, it is observed that the erected equipment(s) do not meet the above minimum clearances, the

Contractor shall immediately proceed to correct the discrepancy at his risks and costs.

3.34.09 DEGREE OF PROTECTION

The enclosures of the Control Cabinets, Junction boxes and Marshalling boxes panels etc to be installed shall be provided with degree of protection as detailed here under:

- a) Installed out door: IP-55
- b) Installed indoor in air conditioned area: IP-31
- c) Installed in covered area IP:52
- d) Installed indoor-in non air-conditioned area where possibilities of entry of water is limited:IP-41
- e) For LT switchgear (AC & DC distribution Boards): IP-54

The degree of protection shall be in accordance with IS:13947, (Part-1)/IEC-947(Part-1). Type test report/or degree of protection test on each type of the box shall be submitted for approval.

3.34.10 RATING PLATES, NAME PLATES AND LABELS

Type or serial number together with details of the loading conditions under which the item of the substation in question has designed to operate and such diagram plates as may required by the Purchaser. The rating plate of each equipment shall be according to IEC requirements.

All such nameplate instruction plates, rating plates shall be bilingual with Hindi inscription first followed by English. Alternately two separate plates one with Hindi and other with English inscriptions may be provided.

3.34.11 EARTHING

Circuit breakers, LA, Isolator, CVT , CT , BPI shall be provided with two grounding pads suitable for connection to galvanized steel flat. Control panels, Relay panel, outdoor marshalling boxes, Junction boxes, Lighting panels and distribution board shall be provided with two grounding pads, for connection to galvanized steel flat. The two pads shall be provided, one each at the middle of the two opposite sides of the bottom frame of the equipment. Earthing of hinged door shall be done by using a separate earth wire.

3.34.12 TERMINAL BLOCKS AND WIRING

Control and instrument leads from the switchboards or from other equipment will be brought to

terminal boxes or control cabinets in conduits. All Inter-phase and external connections to equipment or to control cubicles will be made through terminal blocks.

Terminal blocks shall be 1100 V grade and have continuous rating to carry the maximum expected current on the terminals. Those shall be of moulded piece complete with insulated barriers stud type terminals, washers nuts and lock nuts. Screw clamp, overall insulated, insertion type, rail mounted terminals can be used in place of stud type terminals. But preferably the terminal blocks shall be non-disconnecting stud type equivalent to Elmex type CATM4, Phoenix cage clamp type of Wedge or equivalent. The Insulating material of terminal block shall be nylon 6.6 which shall be free of halogens, fluorocarbons etc.

Terminal block for current transformer and voltage transformer secondary leads shall be provided with test links and isolating facilities. The current transformer secondary leads shall also be provided with short circuiting and earthing facilities.

The terminal shall be that maximum contact area is achieved when a cable is terminated. The terminal shall have a locking characteristic to prevent cable from escaping from the terminal clamp unless it is done intentionally. The conducting part in contact with cable shall preferably be tinned or silver plated however Nickel plated copper or zinc plated steel shall also be acceptable. The terminal blocks shall be of extensible design. The terminal blocks shall have locking arrangement to prevent its escape from the mounting rails.

The terminal blocks shall be fully enclosed with removable covers of transparent, non deteriorating type plastic material. Insulating barriers shall be provided between the terminal blocks. These barriers shall not hinder the operator from carrying out the wiring without removing the barriers.

Unless otherwise specified terminal blocks shall be suitable for connecting the following conductors on each side.

All circuits except CT circuits :	Minimum of 2 nos. of 2.5 sq.mm, copper flexible.
All CT circuits :	Minimum of 4 nos. of 2.5 sq.mm, copper flexible..

The arrangements shall be in such a manner so that it is possible to safely connect or disconnect terminals on live circuits and replace fuse links when the cabinet is live. At least 20 % spare terminals shall be provided on each panel/cubicle/box and these spare terminals shall be uniformly distributed on all terminals rows.

There shall be a minimum clearance of 250mm between the first bottom row of terminal block and the associated cable gland plate. Also the clearance between two rows of terminal blocks shall be a minimum of 150 mm. The Supplier shall furnish all wire, conduits and terminals for the necessary inter-phase electrical connection (where applicable) as well as between phases and common terminal boxes or control cabinets.

All input and output terminals of each control cubicle shall be tested for surge withstand capability in accordance with the relevant IEC Publications, in both longitudinal and transverse modes. The supplier shall also provide all necessary filtering, surge protection, interface relays and any other measures necessary to achieve an impulse withstand level at the cable interfaces of the equipment.

3.34.13 CONTROL CABINETS, JUNCTION BOXES, TERMINALS BOXES AND MARSHALLING BOXES FOR OUTDOOR EQUIPMENTS

All types of boxes, cabinets etc. shall generally conform to and be tested in accordance with IS-5039, IS-8623 or IEC-439, as applicable and the clause given below.

Control cabinet, Junction boxes, Marshalling boxes & Terminal boxes shall be made of sheet steel or aluminium and shall be dust, water and vermin proof. Sheet used shall be least 2.0 mm cold rolled or 2.5mm hot rolled. The box shall be properly braced to prevent wobbling. There shall be sufficient reinforcement to provide level surfaces, resistance to vibrations and rigidity during transportation and installation. In case of aluminium enclosed box the thickness of aluminium shall be such that it provides adequate rigidity and long life as comparable with sheet of specified thickness. Cabinet/boxes shall be free standing floor mounting type, wall mounting type or pedestal mounting type as per requirements.

Cabinet /boxes shall be provided with double hinged doors with padlocking arrangements. The distance between two hinges shall be adequate to ensure uniform sealing pressure against atmosphere. The quality of gaskets shall be such that it does not get damaged/cracked during the operation of the equipment.

All door, removable covers and plates shall be gasketed all around with suitably profiled EPDM gaskets. The gasket shall be tested in accordance with approved quality plan. The quality of gasket shall be such that it does not get damaged /cracked during the years of the equipment or its major overhaul whichever is earlier. All gasketed surfaces shall be smooth, straight and reinforced if necessary to minimize distortion and to make a tight seal. Ventilating Louvers, if provided, shall have screen and filters. The screen shall be fine wire mesh made of brass.

All boxes/cabinets shall be designed for the entry of cables from bottom by means of weather proof and dust-proof connections. Boxes and cabinets shall be designed with generous clearances to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the box or cabinet. Suitable cable gland plate projecting atleast 150 mm above from the base of the Marshalling Kiosk/box shall be provided for this purpose along with the proper blanking plates. Necessary number of cable glands shall be supplied and fitted on this gland. The gland shall project atleast 25mm above gland plate to prevent entry of moisture in cable crutch. Gland plate shall have provision for some future glands to be provided later, if required

3.34.14 SPACE HEATERS

The heater shall be suitable for continuous operation at 240 V AC supply voltage and shall be provided with on – off switch and fuse shall be provided for heater.

One or more adequately rated, thermostatically connected heaters shall be supplied to prevent condensation in any compartment. The heater shall be installed in the lower portion of the compartment and electrical connections shall be made from below the heater to minimize deterioration of supply wire insulation. The heaters shall be suitable to maintain the compartment temperature to prevent condensation.

The heaters shall be suitably designed to prevent any contact between the heater wire and air and shall consist of coiled resistance wire centered in metal sheath and completely encased in a highly compacted powder of Magnesium Oxide or other material having equal heat conduction and electrical insulation properties, or they shall consist of a resistance wire wound on a ceramic and completely covered with a ceramic material to prevent any contact between the wire and air. Alternatively, they shall consist of resistance wire mounted into a tubular ceramic body built into an envelop of stainless steel or the resistance wire is wound on a tubular ceramic body and embedded in glaze the surface temperature of the heaters shall be restricted to a value which will not shorten the life of the heater sheaths or that of insulated wire or other component in the compartments

3.35 DOCUMENTATION

3.35.01 LIST OF DOCUMENTS

The bidder shall submit a detailed list of drawings / documents along with the bid proposal which he intends to submit to the Employer after award of the contract.

The supplier shall necessarily submit all the drawings / documents unless any thing is waived.

All engineering data submitted by the Contractor after final process including review and approval by the Employer shall form part of the Contract Document and the entire works performed under this specification shall be performed in strict conformity, unless otherwise expressly requested by the Employer in Writing.

3.35.02 DRAWINGS

All drawings submitted by the Contractor including those submitted at the time of bid shall be in sufficient detail to indicate the type, size, arrangement, material description, Bill of Materials, weight of each component, break-up for packing and shipment, the external connections, fixing arrangement required, the dimensions required for installation and interconnections with other equipments and materials, clearances and spaces required for installation and interconnection between various portions of equipments and any other information specifically requested in the specifications.

Each drawing submitted by the Contractor shall be clearly marked with the name of the Employer, name of consultant, the unit designation, GSECL contract no. , and the name of the Project .If

standard catalogue pages are submitted, the applicable items shall be indicated therein. All titles, noting, markings and writings on the drawing shall be in English. All the dimensions should be in metric units.

Further work by the Contractor shall be in strict accordance with these drawings and no deviation shall be permitted without the written approval of the Employer if so required.

All manufacturing and fabrication work in connection with the equipment prior to the approval of the drawing shall be at the Contractor's risk. The Contractor may make any changes in the design which are necessary to make the equipment conform to the provisions and intent of the Contract and such changes will again be subject to approval by the Employer. Approval of Contractor's drawing or work by the Employer shall not relieve the contractor of any of his responsibilities and liabilities under the Contract.

3.35.03 APPROVAL PROCEDURE

The scheduled dates for the submission of these as well as for, any data/information to be furnished by the Employer would be discussed and finalized at the time of award. The supplier shall also submit required no. of copies as mentioned in this specification of all drawings/design documents/test reports for approval by the Employer. The following schedule shall be followed generally for approval.

i.	Approval/comments/by employer on Initial submission	Within 2 weeks of receipt
ii.	Resubmission	Within 2 (two) weeks (whenever from date of comments required) Including both ways postal time.
iii.	Approval or comments	Within 2 weeks of receipt of resubmission
iv.	Furnishing of distribution copies	2 weeks from the date of last approval.

Note: The contractor may please note that all resubmissions must incorporate, all comments given in the submission by the Employer failing which the submission of documents is likely to be returned. Every revision shall be a revision number, date and subject, in a revision block provided in the drawing, clearly marking the changes incorporated.

The title block of drawings shall contain the following information incorporated in all contract drawings.

Customer: Gujarat State Electricity Corporation Ltd.

Consultant: Development Consultants Pvt. Ltd., Kolkata

Project: 400kV Switchyard (extn.) & 400kV GIS for 1x800 MW Wanakbori Thermal Power Station Extn. Unit-8

NOA NO.

3.35.04 DOCUMENTS TO BE SUBMITTED ALONGWITH OFFER

- 1) Drawings
- 2) Guaranteed Technical Particulars
- 3) Type Test Reports
- 4) Manufacturing Quality Plan

3.35.05 DOCUMENTATION SCHEDULE

S. No.	DESCRIPTION	TENDER STAGE	CONTRACT STAGE FOR APPROVAL	FINAL DOCUMENTATION	
				Prints	CDs
1	Drawings and Data Sheets	1	10	13	-
2	Drawings "As Built "	-	-	13	05
3	Type Test Reports	1	05	13	-
4	Erection Manuals	-	11	13	-
5	Operation and Maintenance Manuals	-	11	13	-
6	Manufacturing Quality Plan	1	11	13	-
7	Field Quality Plan	1	11	13	-
8	Inspection Test Reports	-	-	13	-

Drawings will also be submitted in mini cartridges in AUTOCAD Release -2008 package or any other CAD package along with conversion files for all major items.

Final Documentation shall be submitted in bound volumes with Customer & Project etc. written on top.

3.35.06 AS-BUILT DRAWINGS

The Contractor shall furnish drawings and document in as-built condition as stipulated in the specification.

On completion of the project, contractor should submit Three Sets of As commissioned drawings, Three Sets of as Installed Bill of Materials and Three Sets of As Commissioned Data/ Specification /Parameter Sheets Duly Signed by the Competent Authority.

3.35.07 DRAWINGS, DATA, INFORMATION AND MANUALS

3.35.08 Drawings, data, information & manuals shall be submitted as indicated below:

3.35.09 To be submitted after award of the Contract.

- a) Single line diagram giving rating of each equipment.
- b) Design calculations in support of selection of equipment rating and system design.
- c) Technical Data sheets, characteristic curves.
- d) Equipment layouts, layout of switchyard with sections.
- e) Grounding & lightning protection drawings and details.
- f) Cabling, cable trench and tray layouts with section and details with cable sizing calculation.
- g) Dimensional general arrangement drawing along with cross- sections for equipment.
- h) Foundation plan and loading data : design calculation and detail drawing of foundation.
- i) Design calculation and detail drawing for civil work related to this specification.
- j) Design calculation, GA drawing for GI structure and equipment supporting structure, and subsequently detailed drawings.
- k) Mounting details of equipment and structure.
- l) Fire fighting and sump arrangement.
- m) Control & operation write up/Block logic diagrams.
- n) Control schematic and wiring diagram.
- o) Cable schedule and interconnection and cable routing.
- p) Relay co-ordination.
- q) Civil & structural analysis, design calculations and working drawings including bar bending schedule and fabrication.
- r) Erection and maintenance manual.
- s) Any other drawings & data as required for satisfactory installation, operation & maintenance.

3.35.10 OPERATING MANUALS AND MAINTENANCE INSTRUCTIONS

- (i) The Contractor shall provide at least six (6) months before the time of commissioning and before taking over of the plant and equipment, all necessary maintenance manuals and operating instructions. The instruction manual shall be submitted in the form of one (1) soft copy in CD and 15 hardcopies.
- (ii) The information provided, which shall be contained in loose leaf stiff backed covers, shall include :
 - a) A complete inventory of all main items of plant, with identification details.
 - b) Service manuals for all plant and equipment giving full descriptions of the main items and auxiliary items such as power packs, hydraulic equipment, actuators, lubricating pumps, etc.
 - c) A separate electrical manual covering items such as switchgear, cabling, instrumentation, controls, cabling layouts and wiring diagrams.
 - d) A schedule of recommendations for routine maintenance of all electrical and mechanical equipment, recommended inspection point, information on detection, cause and rectifications of

troubles & faults.

e) A lubrication schedule with all necessary drawings diagrams to identify the lubrication points.

f) Manufacturer's literature.

(iii) The instruction manual shall be subject to the approval of Owner.

3.35.11 PLANT HANDBOOK

The Contractor shall submit to the Engineer, a preliminary plant handbook preferably in A-4 size sheets which shall contain the design and performance data of various plant, equipment and systems covering the complete project including single line flow diagrams, within twenty four (24) months from the date of his acceptance of the letter of award. The final plant handbook complete in all respects shall be submitted by the Contractor six (6) months before start-up and commissioning activities. The plant handbook shall be submitted in the form of two (2) soft copy in CD (one to Owner and one to Consultant) and twenty five (25) hard copies in decent bound forms.

3.35.12 CONTRACT STAGE DOCUMENT SUBMISSION AND APPROVALPROCEDURE

(i) Within fifteen (15) days of issue of Letter of Award (LOA) by the Owner, the Contractor shall furnish a schedule of drawings and design document to be submitted by him to the Owner/Engineer indicating dates against each document. The documents shall be divided into two categories:

a) for approval and

b)for information/further engineering and co-ordination by the Owner.

In preparing this schedule, the Contractor shall allow four (4) weeks from date of receipt for review and comments by the Owner/Engineer for each submission of a document.

This document submission schedule shall require approval by the Owner/Engineer.

(ii) All contract documents shall be marked, without fail, with the name of the Owner, the Project, the specification title and number and the unit designation. All dimensions shall be in metric units. All notes, markings etc. shall be in English.

(iii) Documents/Drawings, submitted during tender stage, shall be revalidated or revised as required and submitted as certified contract document for approval/ information of the Owner/Engineer.

(iv) Unless specified otherwise, the following categories of documents/drawings would require approval of the Owner/Engineer:

a) List of sub-vendors (from Owner only)

b) System scheme and instrumentation diagrams

- c) Design basis justifying selection of equipment & process parameters where not specified in the Contract
 - d) Equipment data sheets and general arrangement drawings
 - e) Materials of construction
 - f) Layout drawings.
 - g) Operation logic diagrams.
 - h) Typical control circuit.
 - i) Drawings of Instrumentation and control.
- (v) Unless specified otherwise, the following categories of documents/ drawings would be treated for information/further engineering by the Owner/Engineer. The Contractor shall, however, incorporate all additional information and clarifications in these documents / drawings as and when desired by the Owner/Engineer.
- a) Equipment foundation drawings.
 - b) Equipment cross-section drawings, product literature etc. which are of proprietary nature.
 - c) Predicted performance curves of equipment.
 - d) Various bills of quantity, schedules etc.
 - e) Piping fabrication drawings, isometrics etc.
 - f) Panel wiring diagrams.
 - g) Instruction/Operation manuals.
 - h) Service manuals and trouble shooting guide for C & I system including field instruments.
 - i) Cable schedule and interconnection chart.
 - j) Drive/feeder wise control scheme showing all external interfaces.

In essence, the Contractor is solely responsible for corrections and adequacy of design & engineering for documents under this category.

- (vi) Upon review, the Owner/Engineer shall put his remarks and one of the following action stamps on the drawing/document:
- a) Approved.

- b) Approved except as noted, forward final drawing
- c) Approved except as noted, resubmission required.
- d) Disapproved.
- e) For information/reference only.

For action stamps in category (c) & (d), documents must be resubmitted for review by the Owner/Engineer. For action stamp in category (b), further review by Owner/Engineer would not be necessary provided the Contractor agrees & incorporates the comments made on the document. Except for action stamp under category (c) & (d), the Contractor can proceed with manufacturing and other sequential activities for those areas of a drawing/document which do not have any review comment by the Owner/Engineer.

The Owner/Engineer may accord approval in category (c) or (d) in more than one submission of a document till he is satisfied that the intent of the specification has been fully complied with. The Contractor shall be responsible for delay in such cases and no extension of time shall ordinarily be allowed on such grounds. Approval of contract documents by the Owner/Engineer shall not relieve the Contractor of his responsibility for any errors and fulfillment of contract requirements. The Contractor's work shall be in strict accordance with the finally approved drawings and no deviation shall be permitted without written approval of the Owner/Engineer.

- (vii) Except key plan/general yard plan, any layout drawing requiring scrutiny shall not be drawn to a scale less than 1:50.
- (viii) For review by the Consulting Engineer, the Contractor shall furnish softcopies of drawings & documents and three (3) prints of each drawing/document. Two (2) prints of such submission shall also be sent to the Owner. After review, comment/approval will be sent to the Contractor. Upon action under category (a) or (e), the Contractor shall directly distribute the documents to the various offices of the Owner and other agencies in number of copies as specified in the contract document. Such distribution copies shall be marked with the reference and date of the letter by which the Owner/Engineer has accorded his final approval. Penal action shall be taken against the Contractor for any unauthorized revision in the drawings so distributed from the drawings approved by the Owner/Engineer. The contractor shall furnish three (3) CDs of all as built/final drawings for Owner/Consultant site.
- (ix) In case of contradiction between the stipulations above and those stated elsewhere in the specification, the stipulations herein shall prevail.
- (x) For details of documentation for Civil, Structural and Architectural works, Vol.II-G may be referred.

3.36 QUALITY ASSURANCE

3.36.01 The Contractor shall follow his standard procedures for quality assurance and control. A copy of the

said standard procedures shall be submitted to the Owner / Purchaser for his reference. However, Owner / Purchaser reserves the right to review the same and give his observations, if any, for compliance.

3.36.02 The procedures shall be in such a form as to clearly delineate the manufacturing sequence, inspection points, tests and test procedures, acceptable ranges / values, reference drawings etc.

3.36.03 The Owner / Purchaser shall inform the Contractor as to which of the inspection points and tests shall be witnessed. As a minimum, inspection and testing of the finished equipment shall be made prior to shipment, unless specifically waived by the Owner / Purchaser. The contractor shall give at least fifteen (15) days advance notice regarding readiness of the equipment.

3.36.04 Manufacturing and quality control procedures shall be available for audit to the Owner / Purchaser and/or its representative at the place of manufacture.

3.36.05 The Owner / Purchaser reserves the right to inspect the equipment at the point of manufacture and witness factory and other such tests as may be necessary to ensure conformance to the specification.

3.36.06 The Owner / Purchaser may inspect the Contractor's facilities prior to award of contract.

3.36.07 The Owner / Purchaser may witness any or all of the tests stipulated in the relevant standards and this specification.

3.36.08 The Owner / Purchaser may conduct surveillance of the Contractor's facilities for compliance to his standard procedures of Quality Assurance and Quality Control while work on the specified equipment is in progress.

3.36.01 QUALITY ASSURANCE REQUIREMENTS

1.00.00 QUALITY ASSURANCE PROGRAMME

1.01.00 To ensure that the equipment and services under the scope of Contract whether manufactured or performed within the Contractor's works or at his Sub-contractor's premises or at the Owner's site or at any other place or work are in accordance with the specifications, the Contractor shall adopt suitable quality assurance programme to control such activities at all points, as necessary. Such programmes shall be outlined by the Contractor and shall be finally accepted by the Owner/Authorized representative after discussions before the award of contract. A quality assurance programme of the Contractor shall generally cover the following:

a) His organization structure for the management and implementation of the proposed quality assurance programme.

b) Documentation control system.

c) Qualification data for Bidder's key personnel.

- d) The procedure for purchase of materials, parts, components and selection of Sub-contractor's services including vendor analysis, source inspection, incoming raw-material inspection, verification of materials purchased etc.
- e) System for shop manufacturing and site erection control including process controls and fabrication and assembly controls.
- f) Control of non-conforming items and system for corrective actions.
- g) Inspection and test procedure both for manufacture and all site related works.
- h) Control of calibration and testing of measuring and testing equipments.
- i) System for quality audit.
- j) System for indication and appraisal of inspection status.
- k) System for authorizing release of manufactured product to the Owner.
- l) System for handling storage and delivery.
- m) System for maintenance of records.
- n) Furnishing of quality plans for manufacturing and field activities detailing out the specific quality control procedure adopted for controlling the quality characteristics relevant to each item of equipment/component as per format enclosed at Annexure-I to this section.

2.00.00 GENERAL REQUIREMENTS - QUALITY ASSURANCE

- 2.01.00 All materials, components and equipment covered under this specification shall be procured, manufactured, erected, commissioned and tested at all the stages, as per a comprehensive Quality Assurance Programme. An indicative programme of inspection/tests to be carried out by the Contractor for some of the major items is given in the respective technical specification. This is however, not intended to form a comprehensive programme as it is the Contractor's responsibility to draw up and implement such programme duly approved by the Owner/Consultant. The detailed Quality Plans for manufacturing and field activities should be drawn up by the Bidder, separately in the format attached at Annexure-I and will be submitted to Owner/Authorized representative for approval. Schedule of finalization of such quality plans will be finalized before award.
- 2.02.00 Manufacturing Quality Plan will detail out for all the components and equipment, various tests/inspection, to be carried out as per the requirements of this specification and standards mentioned therein and quality practices and procedures followed by Contractor's Quality Control organization, the relevant reference documents and standards, acceptance norms, inspection documents raised etc., during all stages of materials procurement, manufacture, assembly and final testing/performance testing.

- 2.03.00 Field Quality Plans will detail out for all the equipment, the quality practices and procedures etc. to be followed by the Contractor's site Quality Control organization, during various stages of site activities from receipt of materials/equipment at site.
- 2.04.00 The Bidder shall also furnish copies of the reference documents/plant standards/acceptance norms/tests and inspection procedure etc., as referred in Quality Plans along with Quality Plans. These Quality plans and reference documents/standards etc. will be subject to Owner's approval without which manufacture shall not proceed. These approved documents shall form a part of the contract. In these approved quality plans, Owner/Authorized representative shall identify customer hold points (CHP), test/checks which shall be carried out in presence of the Owners Engineer or his authorized representative and beyond which the work will not proceed without consent of Owner/Authorized representative in writing. All deviations to this specification, approved quality plans and applicable standards must be documented and referred to Owner/Authorized representative for approval and dispositioning.
- 2.05.00 No material shall be dispatched from the manufacturer's works before the same is accepted subsequent to pre-dispatch final inspection including verification of records of all previous tests/inspections by Owner's Engineer/Authorized representative, and duly authorized for dispatch issuance of Material Dispatch Clearance Certificate (MDCC).
- 2.06.00 Materials used or supplied shall be accompanied by valid and approved materials certificates and tests and inspection report as per Owner's approved QAP. These certificates and reports shall indicate the sheet numbers or other such acceptable identification numbers of the material. The material certified shall also have the identification details stamped on it.
- 2.07.00 Castings and forgings used for construction shall be of tested quality. Details of results of chemical analysis, heat treatment record, mechanical property test results shall be furnished.
- 2.08.00 All welding and brazing shall be carried out as per procedure drawn and qualified in accordance with requirements of ASME Section-IX/BS-4870 or other International equivalent standard acceptable to the Owner.
- All brazers, welders etc. employed on any part of the contract at Contractor's/Sub-Contractor's works or at site shall be qualified as per ASME Section-IX or BS-4871 or equivalent international standard approved by the Owner. Such qualification tests shall be conducted in presence of Owner/his authorized representative.
- For welding of pressure parts and high pressure piping the requirements of IBR shall also be complied with.
- 2.09.00 All non-destructive examination (NDT) shall be carried out in accordance with approved international standard. The NDT operator shall be qualified as per SNT-TC-1A (of American Society of non-destructive examination). Results of NDT shall be properly recorded and submitted for approval.
- 2.10.00 All the sub-vendors proposed by the Contractor for procurement of major bought out items including

castings, forgings, semi-finished and finished components/equipment list of which shall be drawn up by the Contractor and finalized with the Owner shall be subject to Owner's approval. Quality Plans of the successful vendors shall be discussed, finalized and approved by the Owner/Authorized representative and form part of the Purchase Order between the Contractor and the Vendor.

2.11.00 All the purchase specifications for the major bought-out items, list of which shall be drawn up by the Contractor and finalized with the Owner shall be furnished to the Owner for comments and subsequent approval before orders are placed. Owner reserves the right to carry out quality audit and quality surveillance of the systems and procedures of the Contractor's or their sub-vendor's quality management and control activities. The Contractor shall provide all necessary assistance to enable the Owner carry out such audit and surveillance. Quality audit/approval of the results of tests and inspection will not prejudice the right of the Owner to reject an equipment not giving the desired performance after erection and shall not in no way limit the liabilities and responsibilities of the Contractor in earning satisfactory performance of equipment as per specification.

2.12.00 Quality requirements for main equipment shall equally apply for spares and replacement items.

2.13.00 Repair/rectification procedures to be adopted to make any job acceptable shall be subject to the approval of the Owner.

2.14.00 For quality assurance of all civil works refer to the specifications for civil works.

3.00.00 QUALITY ASSURANCE DOCUMENTS

3.01.00 The Contractor shall be required to submit two (2) copies and two (2) sets of microfilms of the following Quality Assurance documents within three (3) weeks after dispatch of the equipment:

- a) Material mill test reports on components as specified by the specification.
- b) The inspection plan with verification, inspection plan check points, verification sketches, if used and methods used to verify that the inspection and testing points in the inspection plan were performed satisfactorily.
- c) Non-destructive examination results /reports including radiography interpretation reports.
- d) Factory tests results for testing required as per applicable codes and standards referred in the specification.
- e) Welder identification list listing welder's and welding operator's qualification procedure and welding identification symbols.
- f) Sketches and drawings used for indicating the method of traceability of the radiographs to the location on the equipment.
- g) Stress relief time temperature charts.

h) Inspection reports duly signed by QA personnel of the Owner and Contractor for the agreed inspection hold points. During the course of inspection, the following will also be recorded :

i) When some important repair work is involved to make the job acceptable.

ii) The repair work remains part of the accepted product quality.

i) Letter of conformity certifying that the requirement is in compliance with finalized specification requirements.

4.00.00 INSPECTION, TESTING AND INSPECTION CERTIFICATES

4.01.00 The Engineer, his duly authorized representative and/or an outside inspection agency acting on behalf of the Owner shall have access at all reasonable times to inspect and examine the materials and workmanship of the works during its manufacture or erection and if part of the works is being manufactured or assembled on other premises or works, the Contractor shall obtain for the Engineer and for his duly authorized representative permission to inspect as if the works were manufactured or assembled on the Contractor's own premises or works.

4.02.00 The Contractor shall give the Engineer/Inspector fifteen (15) days written notice of any material being ready for testing. Such tests shall be to the Contractor's account except for the expenses of the Inspector. The Engineer/Inspector, unless the witnessing of the tests is virtually waived, will attend such tests within fifteen (15) days of the date on which the equipment is notified as being ready for test/inspection failing which the Contractor may proceed with test which shall be deemed to have been made in the Inspector's presence and he shall forthwith forward to the Inspector duly certified copies of test reports in six (6) copies.

4.03.00 The Engineer or Inspector shall within fifteen (15) days from the date of Inspection as defined herein give notice in writing to the Contractor, or any objection to any drawings and all or any equipment and workmanship which is in his opinion not in accordance with the contract. The Contractor shall give due consideration to such objections and shall either make modifications that may be necessary to meet the said objections or shall confirm in writing to the Engineer/Inspector giving reasons therein, that no modifications are necessary to comply with the contract.

4.04.00 When the factory tests have been completed at the Contractor's or sub-contractor's works, the Engineer/Inspector shall issue a certificate to this effect fifteen (15) days after completion of tests but if the tests are not witnessed by the Engineer/Inspectors, the certificate shall be issued within fifteen (15) days of the receipt of the Contractor's test certificate by the Engineer/Inspector. Failure of the Engineer/Inspector to issue such certificate shall not prevent the Contractor from proceeding with the works.

The completion of these tests, or the issue of the certificates shall not bind the Owner to accept the equipment should it, on further tests after erection be found not to comply with the contract.

4.05.00 In all cases where the contract provides for tests whether at the premises or works of the Contractor or any sub-contractor, the Contractor, except where otherwise specified shall provide free of charge

such items as labour, materials, electricity, fuel, water, stores, apparatus and instruments as maybe reasonably demanded by the Engineer/Inspector or his authorized representatives to carry out effectively such tests on the equipment in accordance with the Contractor and shall give facilities to the Engineer/Inspector or to his authorized representative to accomplish testing.

- 4.06.00 To facilitate advance planning of inspection in addition to giving inspection notice as per Clause 4.02.00, the Contractor shall furnish quarterly inspection programme indicating schedule dates of inspection at customer hold point and final inspection stages. Updated quarterly inspection plans will be made for each three consecutive months and shall be furnished before beginning of each calendar month.

REQUIREMENTS OF SPARES, TOOLS & TACKLE, LUBRICANTS/OIL/CONSUMABLES

1.00.00 TOOLS & TACKLE

The Contractor shall supply with the equipment one complete set of special tools and tackles required for the erection, assembly, dis-assembly & maintenance of the equipment. These special tools will also include special material handling equipment, jigs & fixtures for maintenance and calibration/re-adjustment, checking & measurement aids etc. A list of such tools & tackles shall be submitted by the Bidder along with the offer. Detailed description of each tool/tackles, its function along with the equipment/part for which it is meant for and the price of each tool/tackles shall also be indicated in the offer. These tools & tackles shall be separately packed and sent to site before the first unit commissioning. The Bidder shall also ensure that these tools are not used for erection purpose.

2.00.00 SPARES

2.01.00 General

The Bidder shall indicate and include in his scope of supply all the necessary start-up, commissioning and recommended spares in addition to mandatory spares as specified elsewhere in the specification. The Owner reserves the right to buy any or all mandatory and recommended spares. The Contractor shall also state for each item of spares both mandatory and recommended, the normal expected service life.

- 2.01.01 All spares supplied under this contract shall be strictly interchangeable with the parts for which they are intended to replace. The spares shall be treated and packed for long storage under the climatic conditions prevailing at the site, e.g. small items shall be packed in sealed transparent plastic bags with desiccator's packs as necessary.
- 2.01.02 Each spare part shall be clearly marked or labeled on the outside of the packing with the description. When more than one spare part is packed in single case, a general description of the contents shall be shown on the outside and a detailed list enclosed. All cases, containers and other packages must be suitably marked and numbered for the purposes of identification.
- 2.01.03 All cases, containers or other packages are liable to be opened for examinations may be considered necessary by the Engineer.

2.01.04 All mandatory spares shall be delivered to site within one to three months prior to the scheduled date of the trial operation of the plant. However, they shall not be dispatched before the dispatch of the associated main equipment.

2.01.05 The Bidder shall also guarantee supply of spare parts, which will be made, based on manufacturer's drawings on special order from the Purchaser for 30years after commissioning of the plant.

2.01.06 Warranty period for all kinds of spares shall be six thousand (6000) hours of operation, except normal wear or eighteen (18) months from the date of receipt at site, whichever is later. In case of failure or non-conformance to specifications, the Contractor shall replace them free of cost.

2.02.00 Recommended Spares

2.02.01 The Contractor shall provide a list of recommended spares giving unit prices and total prices for 2 years of normal operation of the plant for spares of indigenous origin, and for 5 years of normal operation for spares of non-indigenous origin. This list shall take into consideration the mandatory spares specified elsewhere in the specification and should be a separate list.

2.02.02 The price of recommended spares will not be used for the evaluation of bids. The price of these spares shall remain valid for a period as specified elsewhere in the specification from the date of Award of the Contract. Where the recommended spares are the same as mandatory spares, the prices shall be the same. The prices of any recommended spares, which are not common with mandatory spares, shall be subject to review by the Owner, and shall be finalized after mutual discussion.

2.03.00 Start-up Commissioning Spares

2.03.01 Start-up commissioning spares are those spares which may be required during the start-up and commissioning of the equipment/system. All spares used until the plant is handed over to the Owner shall come under this category. Said spares, properly marked, shall be supplied together with the main equipment and shall be used by the Contractor, if needed, during erection & commissioning stage. All such spares which remain unused till issuance of Taking Over Certificate by the Owner, along with an equipment-wise quantitative consumption report shall be returned to the Owner during time of handover. The list of commissioning spares to be brought by the Contractor to ensure smooth commissioning of the plant shall be subject to the Engineer's approval.

2.03.02 The Contractor shall submit a complete list of all such start-up spares. Costs of the above spares, which are consumed before the handing-over of the plant, shall be deemed to have been included in the lump sum proposal price of the package, and the Contractor shall have no claim on this account to the Owner.

2.04.00 Mandatory Spare Parts

2.04.01 The Owner considers some of the spares are essential for running the equipment irrespective of whether they are included in the list of recommended spares by the Bidder as mentioned above. Since the components involved can not be foreseen at the bidding stage, only broad requirements of the Owner in this respect are outlined hereinafter. The bidder shall include his proposal, on the basis of

this guideline, an item-wise list of all components and the quantity, unit prices & total price thereof, offered as mandatory spares for each and every equipment. This list shall be separate from the list of recommended spares and shall be used for bid evaluation purposes. Any clarification in this respect may be obtained by the Bidder at the pre-bidding stage.

2.04.02 Since the components involved can not be foreseen at the bidding stage, only broad requirements of the Owner in this respect are outlined hereinafter. The Bidder shall include in his proposal, on the basis of these guidelines, an item wise list of all components and the quantity, unit prices & total price thereof, offered as mandatory spares for each and every equipment. This list shall be separate from the list of recommended spares and shall be used for bid evaluation purposes. Any clarification in this respect may be obtained by the Bidder at the pre-bidding stage.

2.04.03 The mandatory spares should be supplied to the Owner at least one month before the trial run. The dispatch programme is subject to approval of the Owner/Consultant after award of contract.

ANNEXURE-I

FORMAT OF QUALITY ASSURANCE PROGRAMME

Name of Company/ Contractor	NAME OF CONTRACT PACKAGE		QUALITY PLAN FOR							
	Package No. : _____ Contractor : _____		QP No. : _____ Rev. No. : _____	Date _____ Date _____						
Sl. No.	Component & Operation	Characteristics	Class	Type of Check	Quantum of Check	Reference Document	Acceptance Norm	Format of Record	Agency	Remarks

Note: All the information for QAP as stipulated above shall be finalized and agreed during contract execution.

ANNEXURE-II

FIELD WELDING SCHEDULE

PROJECT : FWS NO :

CONTRACTOR : REV NO. :

PACKAGE : FIELD WELDING CODE :

SYSTEM : PAGE NO. :

SI No.	Drawing No. for Weld Locations & Identification mark	Description of parts to be welded	Material specification	Dimensions	Process of Welding	Type of Weld	Electrode Filler Specification	WPS No.	Minimum Pre-heat Temperature	Heat Treatment Temperature [Holding Time in secs]	NDT Method Quantum	NDT Specification Number	Acceptance Norm Ref.	Remarks
--------	--	-----------------------------------	------------------------	------------	--------------------	--------------	--------------------------------	---------	------------------------------	---	--------------------	--------------------------	----------------------	---------

The Field Welding Schedule should be submitted for :

- ☐ Pressure Parts
- ☐ Tanks/Vessels
- ☐ Piping
- ☐ Heavy/Important Structural Steel
- ☐ Heat Exchangers
- ☐ Bus Ducts

SCHEDULE-IIID/13

CABLES

The Bidder shall fill-up sheets of like format for each Group of cables i.e. power & Control cables. The Bidder shall also fill in the technical particulars separately for each type and size of cables of a particular group (Add sheets, if necessary).

A. HT & LT POWER CABLES		HT 3.3/ 3.3KV	HT 6.6/ 6.6KV	HT 11/	LT 1.1/ 1.1KV
1.0	Make	:			
2.0	Type	:			
3.0	Applicable Standard	:			
4.0	Voltage Grade	:			
5.0	Suitable for System with				
	a) Service Voltage	:			
	b) Neutral Earthing	:			
6.0	Maximum Conductor Temperature				
	a) Continuous	Deg.C	:		
	b) Short Time	Deg.C	:		
7.0	Conductor				
	a) Material	:			
	b) Material of conductor conforms to (State class and applicable Standard)	:			
	c) Grade	:			
	d) Size	Sq.mm	:		
	e) No. & Diameter of wire in each conductor No./mm	:			
8.0	Shielding On Conductor				
	a) Material	:			
	b) Type	:			
	c) Thickness	mm	:		
9.0	Insulation				

- | | | | |
|------|-------------------------|--|----------|
| | a) | Material | : |
| | b) | Type/Applicable Standard | : |
| | c) | Thickness | mm : |
| 10.0 | Shielding On Insulation | | |
| | a) | Material | : |
| | b) | Type | : |
| | c) | Thickness | mm : |
| 11.0 | Inner Sheath | | |
| | a) | Material | : |
| | b) | Type/Applicable Standard | : |
| | c) | Thickness | mm : |
| | d) | Extruded ? | Yes/No : |
| | e) | Calculated dia. over laid up core | mm : |
| | f) | Approx. Outside dia. over sheath | mm : |
| 12.0 | Armouring | | |
| | a) | Material | : |
| | b) | Type/Applicable Standard | : |
| | c) | Calculated dia. over inner sheath (under armour) | mm : |
| | d) | Size of armour wire/strip | mm : |
| | e) | No. of armour wires/strips | : |
| | f) | D.C. Resistance at 20 Deg.C | Ohm/Km : |
| 13.0 | Overall Sheath | | |
| | a) | Material | : |
| | b) | Type/Applicable Standard | : |
| | c) | Calculated dia. under sheath (over armour) | mm : |
| | d) | Thickness | mm : |

- e) Colour :
- 14.0 Approximate overall diameter mm :
- 15.0 Standard drum length with tolerance mm :
- 16.0 Net Weight of Cable Kg/Km :
- 17.0 Continuous Current Rating for
Standard IS Condition laid direct
- a) In Ground :
- b) In Duct :
- c) In Air :
- 18.0 Short Circuit Current for 1 Sec. KA :
- 19.0 Electrical Parameters at max. operating temp.
- a) Resistance Ohm/Km :
- b) Reactance at 50 c/s Ohm/ Km :
- c) Impedance Ohm/Km :
- 20.0 Recommended minimum bending radius :
- 21.0 Derating Factor for following Ambient
Temperature in Air/Ground
- a) at 30 Deg.C :
- b) at 35 Deg.C :
- c) at 45 Deg.C :
- d) at 50 Deg.C :
- 22.0 Group Factor for following nos. of Cables laid
Touching/ 2 x diameter center to center apart
- a) Single Core cable (in trefoil)
- i) 2 Nos. :
- ii) 3 Nos. :
- iii) 4 Nos. :

- b) Multicore Cable
 - i) 3 Nos. :
 - ii) 4 Nos. :
 - iii) 5 Nos. :
 - iv) 6 Nos. :
- 23.0 The Cables shall be tested as specified :

4.0 **TERMINAL BLOCK**

- 4.1 Make :
- 4.2 Type :
- 4.3 Reference Standard :
- 4.4 Current rating :
- 4.5 Catalogue furnished ? :
- 4.6 20% spare terminals provided :

5.0 **CABLE TERMINATION KIT**

XLPE Cable ~~PVC Cable~~

- 5.1 Make :
- 5.2 Type :
- 5.3 Suitable for voltage grade :
- 5.4 Cable termination kit furnished for XLPE & PVC cables :
- 5.5 Complete with all accessories ? :

6.0 **CABLE STRAIGHT-THROUGH JOINTING KIT**

- 6.1 Make :
- 6.2 Type :
- 6.3 Suitable for Voltage Grade :
- 6.4 Cable Jointing Kit furnished for both XLPE and PVC cables ? :
- 6.5 Complete with all necessary accessories :

7.0 **CABLE GLAND**

- 7.1 Make :
- 7.2 Type/Material :
- 7.3 Double Compression Type :
- 7.4 Complete with armour clamp :

SECTION – 5
CHECK LIST

1. TECHNICAL REQUIREMENTS FOR 11KV XLPE CABLES AND ITS ACCEESORIES

Sl.	Particulars	Reply by bidder.(if no, please state reasons for the same)	
1	TECHNICAL QUALIFYING REQUIREMENT		
1.1	Papers for qualifying requirement enclosed.	Confirmed	Yes/No
1.2	The bid shall be submitted by the Manufacturer of the 11 kV Cable. The bidder's scope includes supply and services like supervision of installation, testing and commissioning. Bids submitted by agents will not be considered.	Confirmed	Yes/No
1.3	All the documents shall be submitted in English. Translated pages should be attested by the bidder.	Confirmed	Yes/No
2	Un-priced Offer –.		
2.1	Confirm that all items have been quoted. (If any item has not been quoted, the same shall be specifically brought out in Schedule of Technical Deviation)	Confirmed	Yes/No
2.2	Lug / Terminal connector for overhead connection for jointing in bidder's scope	Confirmed	Yes/No
3	Cable Lengths		
3.1	Manufacturing lengths and drum length shall be determined as per the joint site survey with GSECL/BHEL.	Confirmed	Yes/No
4	Technical		
4.1	Calculation for metallic screen and armor coverage percentage shall be submitted after award of contract.	Confirmed	Yes/No
4.2	Confirm that the Complete systems have been offered as per the requirements of Technical Specification and Technical Deviation sheet has been submitted. Deviations mentioned elsewhere in the bid will not be considered.	Confirmed	Yes/No
5	Barchart		
5.1	Bidder will submit detailed bar chart indicating all the milestones from Engineering till manufacturing/ testing, dispatch to site and commissioning.	Confirmed	Yes/No
6	Conditions		
6.1	The necessary construction power (1-phase) supply at site shall be provided by BHEL at one point only.	Noted	Yes/No
6.2	<u>Termination and Jointer</u> : Provision of Jointer and Terminating material, consumables, tools and Scaffolding, cranes for lifting for the sealing end materials, assembly of sealing ends have been included in Bidder scope .	Confirmed	Yes/No

Sl.	Particulars	Reply by bidder.(if no, please state reasons for the same)	
6.3	Store will be provided by BHEL. Bidder to provide their requirement of space in open and closed store during tender stage. Office facilities & accommodation for supplier staff, Travel expenses for supplier staff shall be in supplier scope.	Confirmed	Yes/No
6.4	Route indicators for power cables at an interval not exceeding 30m and also at turning points of the power cable route wherever practicable in line with clause no. 4.2.1.3 of IS: 1255 shall be in Bidder scope & note 14 of section 1.	Confirmed	Yes/No
6.5	The cable cleats, 11kV connectors including hardware for fixing the cable on two pole structure shall be in supplier scope. BHEL will provide two pole structure and post insulators.	Confirmed	Yes/No
6.6	The cable cleats including hardware for fixing the straight joint on two pole structure shall be in supplier scope.	Confirmed	Yes/No
7	Site Test		
7.1	Provision of test engineer, supply of all test equipment and arrangement shall be in bidder's scope.	Confirmed	Yes/No
7.2	No separate site test will be conducted by BHEL/Customer	Confirmed	Yes/No
8	TYPE TESTS REQUIREMENTS		
8.1	The 11kV Cabling system (11 kV XLPE Cables, cable termination kits & jointing kits etc.) should have been type tested.	Confirmed	Yes/No
8.2	The test - reports submitted shall be of the tests conducted within last 5 years prior to 05.09.2014	Confirmed	Yes/No
8.3	The type tests conducted earlier should have either been conducted in an accredited laboratory (accredited base on ISO / IEC Guide 25 / 17025 or EN 45001 by the national accreditation body of the country where laboratory is located). If the laboratory is not a national laboratory and member of STL, relevant papers of accreditation shall be submitted in English. If the laboratory is in-house, the tests should have been witnessed by an independent agency.	Confirmed	Yes/No
8.3	The type test report shall be complete including list the test objects, photographs, oscillographs, test arrangement, drawing of tested objects (cables, accessories, etc), test connections. The type test report shall be in English. If it is in any other language, it should include an English version (Translation shall be attested by the Bidder). The English version should be complete with measured values and conclusion.	Confirmed	Yes/No
9	INSPECTION & TESTING		

Gujarat State Electricity Corporation Ltd.
400kV AIS Switchyard (Extension) and 400 kV GIS for 1x800 MW
Supercritical Thermal Power Project at Wanakbori
Technical Specification for 11kV cable and accessories

Bharat Heavy Electricals Ltd.
Doc. No. TB-375-316-028,
Rev. No.00

Sl.	Particulars	Reply by bidder.(if no, please state reasons for the same)	
9.1	Inspection and Testing shall be as approved Quality Plan.	Confirmed	Yes/No