

Technical Specification for Visual Monitoring System

Visual monitoring system for watch and ward of Substation premises :

Visual monitoring system (VMS) for effective watch and ward of sub station premises covering the areas of entire switchyard, ~~Control Room cum Administrative building, Fire fighting pump house, stores and main gate~~, shall be provided. The contractor shall design, supply, erect, test and commission the complete system including cameras, Digital video recorder system, mounting arrangement for cameras, cables, LAN Switches, UPS and any other items/accessories required to complete the system. To provide all the necessary licenses to run the system successfully shall be in the scope of contractor.

System with Color IP Cameras for VMS surveillance would be located at various locations including indoor areas and outdoor switchyard and as per the direction of Engineer-In-Charge. The VMS data partly/completely shall be recorded (minimum for 15 days) and stored on network video recorder.

The number of cameras and their locations shall be decided in such a way that any location covered in the area can be scanned. The cameras shall be located in such a way to monitor at least:

1. The operation of each and every isolator pole of the complete yard in case of AIS Sub-station.
- ~~2. The Operation of each bay bays of GIS Hall as Applicable.~~
3. All the Transformer and Reactors ~~All the Entrance doors of Control Room Building and Fire fighting Pump House, GIS Hall and Switchyard Panel room as applicable.~~
- ~~4. All the gates of switchyard.~~
- ~~5. Main entrance Gate~~
6. All other Major AIS Equipment (such as CB, CT, CVT, SA etc. as applicable)

The cameras can be mounted on structures, buildings or any other suitable mounting arrangement to be provided by the contractor.

1.1 Technical requirements of major equipment of Visual Monitoring System.

- 1.1.1 The Video Monitoring system shall be an integrated system with IP network centric functional and management architecture aimed at providing high-speed manual/automatic operation for best performance.
- 1.1.2 The system should facilitate viewing of live and recorded images and controlling of all cameras by the authorized users.
- 1.1.3 The system shall use video signals from various types of indoor/outdoor CCD colour cameras installed at different locations, process them for viewing on

Technical Specification for Visual Monitoring System

workstations/monitors in the control Room and simultaneously record all the cameras after compression using **H 264**/MPEG 4 or better standard. Mouse/Joystick-KeyBoard controllers shall be used for Pan, Tilt, Zoom, and other functions of desired cameras.

1.1.4 The System shall provide sufficient storage of all the camera recordings for a period of 15 days or more @ 25 FPS, at 4 CIF or better quality using necessary compression techniques for all cameras. It shall be ensured that data once recorded shall not be altered by any means. The recording resolution and frame rate for each camera shall be user programmable.

1.1.5 The surveillance VMS System shall operate on 230 V, 50 Hz single-phase power supply. System shall have back up UPS power supply meeting the power supply need of all the cameras in the stations including those which are installed at gate for a period of 2 hours. The bidder shall submit the sizing calculation for the UPS considering the total load requirement of Video Monitoring System.

1.2 System requirements:

- a) System must provide built-in facility of watermarking or Digital certificate to ensure tamperproof recording.
- b) All cameras may be connected through a suitable LAN which shall be able to perform in 765kV ^{700kV / 220kV} class sub-station environment without fail.
- c) All camera recordings shall have Camera ID & location/area of recording as well as date/time stamp. Camera ID, Location/Area of recording & date/time shall be programmable by the system administrator with User ID & Password.
- d) Facility of camera recording in real-time mode (25 FPS)/15/12.5/10 or lower FPS as well as in any desired combination must be available in the system.
- e) Facility of Camera recording in HD (1280X720p), D1, 4CIF, CIF, VGA, as well as in any combination i.e. any camera can be recorded in any quality.
- f) System to have facility of **100%** additional camera installation beyond the originally planned capacity.
- g) In order to optimize the memory, while recording, video shall be compressed using **H 264**/MPEG-4 or better standard and streamed over the IP network.
- h) System shall be triplex i.e. it should provide facility of Viewing, Recording & Replay simultaneously.
- i) The offered system shall have facility to export the desired portion of clipping (from a specific date/time to another specific date/time) on CD or DVD. Viewing of this recording shall be possible on standard PC using standard software like windows media player etc.
- j) System shall have provision of WAN connectivity for remote monitoring.
- k) The equipment should generally conform to Electro magnetic compatibility requirements for outdoor equipment in EHV switchyards. The major EMC required for Cameras and other equipment shall be as under:

- | | |
|---|-------------------------|
| 1. Electrical Fast Transient (Level 4) | - As per IEC 61000-4-4 |
| 2. Damped Oscillatory (1 MHz and 100 KHz) (level 3) | - As per IEC 61000-4-18 |

Technical Specification for Visual Monitoring System

- | | |
|--|-------------------------|
| 3. AC Voltage Dips & Interruption/Variation (class 3) | - As per IEC 61000-4-11 |
| 4. Electrostatic Discharge (Level 4) | - As per IEC 61000-4-2 |
| 5. Power Frequency Magnetic Field (level 4) | - As per IEC 61000-4-8 |
| 6. Ripple on DC input Power Supply Port immunity test(level 4) | - As per IEC 61000-4-17 |

Type test reports to establish compliance with the above requirement shall be submitted during detailed engineering.

1.2.1 VIDEO SURVEILLANCE APPLICATION SOFTWARE

- a) Digital video surveillance control software should be capable to display and manage the entire surveillance system. It should be capable of supporting variety of devices such as cameras, video encoder, Servers, NAS boxes/Raid backup device etc.
- b) The software should have inbuilt facility to store configuration of encoders and cameras.
- c) The software should Support flexible 1/2/4/8/16/32 Windows Split screen display mode and scroll mode on the PC monitor.
- d) The software should be able to control all cameras i.e. PTZ control, Iris control, auto / manual focus, and color balance of camera, Selection of presets, Video tour selection etc.
- e) The software should have user access authority configurable on per device or per device group basis. The system shall provide user activity log with user ID, time stamp, action performed, etc.
- f) The users should be on a hierarchical basis as assigned by the administrator. The higher priority person can take control of cameras, which are already being controlled by a lower priority user.
- g) It should have recording modes viz. continuous, manual, or programmed modes on date, time and camera-wise. All modes should be disabled and enabled using scheduled configuration. It should also be possible to search and replay the recorded images on date, time and camera-wise. It should provide onscreen controls for remote operation of PTZ cameras. It should have the facility for scheduled recording. Different recording speeds (fps) and resolution for each recording mode for each camera should be possible.
- h) The software for clients should also be working on a browser based system for remote users. This will allow any authorized user to display the video of any desired camera on the monitor with full PTZ and associated controls.
- i) Retrieval: The VMS application should allow retrieval of data instantaneously or any date / time interval chosen through search functionality of the application software. In case data is older than 15 days and available, the retrieval should be possible. The system should also allow for backup of specific data on any drives like DVD's or any other device in a format which can be replayed through a standard PC based software. Log of any such activity should be maintained by the system.
- j) VMS shall provide the full functionality reporting tool which can provide reports for user login/logoff, camera accessibility report, server health check

Technical Specification for Visual Monitoring System
reports etc.

1.2.2 Network video recorder

The Network Video recorder shall include at least Server (min 3.0 GHZ, 4GB RAM, 3000GB HDD(min)), RAID 5 ,with suitable configuration along with Colored TFT 22" High resolution monitor, and Internal DVD writer. Windows XP/Vista/7 Prof. or VMS compatible operating system latest version with hardware like graphic cards, licensed Anti-virus etc.

Further the digital video recorder shall conform to the following requirements:

1.	Server Spec	Intel Quad Core (or better) 3.0 Ghz (min.) , 8 MB Cache , 4 GB memory , with suitable NVIDIA graphics card,3 TB HDD , Raid 5
2.	Recording and Display Frame Rate	Real-time 25 frames per second per channel , manual select
3.	Recording Resolution	(PAL): 1280X720 , 704(H) x 586(V) It should be possible to select lower resolutions
4.	Compression Method	H.264/MPEG-4 or better and latest
5.	Video Motion Detection Capable	Standard and built-in (selectable in menu)
6.	Monitoring Options	Split screen 1, 2, 4 , 8, 16, 32 or more cameras
7.	Playback Options	Search, still image capture
8.	Alarm/Event Recording Capable	To be provided with built-in external alarm input/ output ports minimum(8 in, 2 out)
9.	Network Operation Capable	To be provided by using WAN or LAN router
10.	Remote Internet Viewing Capable	Using WAN or LAN router
11.	HDD Storage Consumption	1GB ~ per hour / channel variable based on frame speed and resolution settings, as well as compression
12.	Operation	Triplex operation (simultaneous recording, playback, network operation)
13.	Number of Video Channel	32
14.	Audio Recording Capable	32
15.	Input Voltage	230V AC or equivalent with UPS as a back up for 30 minutes.

Technical Specification for Visual Monitoring System

1.2.3 VMS Camera

- a) The color IP camera for substation shall have PAN, TILT and ZOOM facilities so that it can be focused to the required location from the remote station through a controller. Whereas wireless IP cameras with PTZ controls are required for installation at gates of the POWERGRID premises as per the direction of Engineer-In-Charge
- b) The IP Camera at the main gate can be fixed or PTZ based and shall be used for monitoring entry and exit
- c) It should have sufficient range for viewing all the poles of isolators and other equipments with high degree of clarity.
- d) The VMS camera shall be suitable for wall mounting, ceiling mounting and switchyard structure mounting.
- e) It shall be possible to define at 128 selectable preset locations so that the camera gets automatically focused on selection of the location for viewing a predefined location.
- f) The camera should be able to detect motion in day & night environments having light intensity of Color: 0.5 Lux; B&W:0.05 Lux
- g) Housing of cameras meant for indoor use shall be of IP 42 or better rating whereas outdoor camera housing shall be of IP 66 or better rating. Housing shall be robust and not have the effect of electromagnetic induction in 765/400kV switchyard.
- h) All camera recordings shall have Camera ID & location/area of recording as well as date/time stamp. Camera ID, Location/Area of recording & date/time shall be programmable by the system administrator with User ID & Password
- i) Facility of camera recording in real-time mode (25 FPS)/15/12.5/10 or lower FPS as well as in any desired combination must be available in the system.

A. Outdoor IP Fixed Megapixel Camera Specifications (For Main Gate)

1.	Image Sensor	2-megapixel Progressive ,1 / 3" CMOS/CCD sensor, Minimum illumination 0.1 Lux
2.	Min Luminous	0.5LUX(Color) 0.05Lux(Black)
3.	Camera Enclosure Type	IP66 Grade
4.	Iris/Focus	Auto/Manual
5.	Video Compression	Dual Stream H.264 and MPEG 4 user selectable
6.	Support Dual-stream	primary/secondary stream, H.264/MPEG 4 optional
7.	Video Definition	Primary stream:1600x1200,1280x960,1280x720, Secondary stream:800x600,400x288,192x144
8.	Video Parameters	Brightness, hue, contrast, saturation and image quality
9.	Video Frame Rate	PAL: 1-25frames/second

Technical Specification for Visual Monitoring System

		NTSC:1-30frames/second
10.	Video Compression BR	32Kbit/S - 6Mbit/S
11.	Video Output	One channel composite Streaming
12.	Supported Protocols	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, DNS, ARP, ICMP, POP3, NTP, IPsec, UpnP, RTP, RTCP
13.	Operating Temperature	-5 ~ +50°C
14.	Operating Humidity	10 ~ 90%

B. Outdoor IP66 PTZ HD Camera Specifications (For Switch Yards)

1.	Image sensor	1/3 type Solid State Progressive Scan CCD,WDR(High Definition)
2.	Security	Multiple user access with password protection
3.	Effective Pixels	(PAL): Main Stream : 1280x720 Sub Stream : 640x360、320x280 selectable
4.	Compression	Dual Stream H.264 and MPEG 4 user selectable
5.	Signal System	50 Hz
6.	S/N (signal to noise) Ratio	Better than 50 dB
7.	Electronic Shutter	1/60 ~ 1/10,000 sec. automatic or better
8.	Scanning System	Progressive/interlace
9.	Low Light Sensitivity (lux)	Color: 0.5 Lux; B&W:0.02 Lux
10.	Lens	Minimum 10x (minimum) optical in High Definition (The system shall be able to zoom the images on the monitor without any distortion to the maximum level of optical zoom)
11.	Lens Size	Minimum 4.1~73.8 mm
12.	Lens Aperture	F1.6(wide)~F2.8(tele), f=4.1~41.0mm, 10X Zoom, Video Auto Focus Angle of View Horizontal : 52°(wide) , 2.8°(tele)
13.	PTZ Data Transfer Baud/Bit Supported Rates	Selectable 2400 bps / 4800 bps / 9600 bps
14.	Panning Range	Complete 360 degrees (horizontal)
15.	Pan Speed	Adjustable, 0.1 degrees / second ~ 250 degrees / second
16.	Tilting Range	Minimum 180° Tilt Rotation
17.	Tilt Speed	Adjustable, 0.1 degrees / second ~ 150 degrees / second
18.	In Built Storage	Camera should have inbuilt storage TF or SD format for recording and storing Pictures
19.	IP Class	IP66 Standard

Technical Specification for Visual Monitoring System

20.	Working temperature	-0°C ~ +50°C
21.	Working Humidity	10 ~ 90%

1.2.4 PTZ-Keyboards

The features of PTZ shall include:

- Fully functional dynamic keyboard/joystick controllers
- Controls all pan, tilt, zoom, iris, preset functions
- Control up to 255 units from a single keyboard
- Many preset options and advanced tour programming
- Compatible with all connected cameras

1.	Key Application	wired keyboard control operation of PTZ functions for weatherproof dome cameras
2.	Pan / Tilt / Zoom Protocol Languages Supported	Selectable
3.	PTZ Data Transfer Baud Rates Supported	selectable 1200 bps / 2400 bps / 4800 bps / 9600 bps
4.	Additional Features	dynamic joystick for smooth camera movements, preset location option for quick access to frequently monitored areas

Annexure - A-1 (For Reference Only)

S. No.	Description	Make & Model
1	IP Fixed Camera	Pelco Sarix IBP221-1R with Mounting Kit
2	IP PTZ Camera	Pelco Spectra P1220 with Mounting Kit P1220-ESR1
SERVER & SOFTWARE		
3	NVR/Server	Pelco DSSRV2-040
4	22" Screen	Samsung
5	Video Monitoring Software	Pelco DS-SW-CAM
6	PTZ Controller	Pelco KBD300A
OTHER ACCESSORIES		
7	27U Network Rack	MTS/D-Link/ValRack
8	Junction Box	MTS/D-Link/ValRack
9	Media Convertor (Card Type)	D-Link/San-Telequip/Digilink
10	Media Convertor (Box Type)	D-Link/San-Telequip/Digilink
11	Media Convertor chassis (16 Slot)	D-Link/San-Telequip/Digilink
12	LIU (6 port)	D-Link/Tyco/Digilink
13	LIU (12 port)	D-Link/Tyco/Digilink
14	FO cable with HDPE/GI pipe (6core)	D-Link/Tyco/Finolex
15	FO cable with HDPE/GI pipe (12core)	D-Link/Tyco/Finolex
16	CAT6 Cable	D-Link
17	24 Port Switch	D-Link
18	UPS 2KVA	Microtek
19	UPS 600VA	Microtek

S. No.	Description	Make & Model
2	IP PTZ Camera	Pelco Spectra P1220 with Mounting Kit P1220-ESR1
SERVER & SOFTWARE		
5	Video Monitoring Software	Pelco DS-SW-CAM
OTHER ACCESSORIES		
8	Junction Box	MTS/D-Link/ValRack
9	Media Convertor (Card Type)	D-Link/San-Telequip/Digilink
10	Media Convertor (Box Type)	D-Link/San-Telequip/Digilink
11	LIU (6 port)	D-Link/Tyco/Digillink
12	LIU (12 port)	D-Link/Tyco/Digillink
14	FO cable with HDPE/GI pipe (12core)	D-Link/Tyco/Finolex
15	CAT6 Cable	D-Link
18	UPS 600VA	Microtek

Annexure -B-1 For Reference Only

Sr. No.	Description	Make
A.	Cameras quoted	
1	SNC-ER 550	Sony
2	SNC-EB632R With IP66 Housing	Sony
B.	Video Monitoring Software (NVR)	
1	Video Monitoring Software	Milestone/Videonetics
C.	Housings & Others	
1	PTZ Camera Housing	Sony
2	Gooseneck Stand -Wall mount bracket -WM82	Sony
3	Power Injectors for EB632R	TP-Link
4	Power Supply for PTZ Camera	Guru/Protek/Powerpulse/Omron
5	PTZ Controller	Sony
D.	Cabinets & Junction Boxes	
1	27 U Networking Rack	MTS/APW
2	Junction Box	Hulasi/Pyrotech/MTS/Jasper
E.	Networking Components	
1	Media Converter (Box Type)	San-Telequip/Comnet/TP-Link
2	Media Converter (Card Type)	San-Telequip/Comnet/TP-Link
3	14/16 Slot Chassis for the media converter	San-Telequip/Comnet/TP-Link
4	LIU - FO Patch Panel - 06 Port (Loaded)	Digilink/D-Link/UL/TYCO/Lightline
5	LIU FO Patch Panel - 24 Port (Loaded)	Digilink/D-Link/UL/TYCO/Lightline
6	10/100, 24 port Switch	D-Link
F.	Servers & Storage	
1	NVR Server - Latest Intel Core i3 , Intel® Xeon® E3-1200 product family 12MB L3, Memory - 4GB, Internal Storage - 1TB, Microsoft Windows 8 with Service pack & Norton Antivirus	HP/ Dell
2	Monitoring storage server, network based with 8TB storage box	Iomega/ D-Link/HP/Netgear
H.	Display devices	
1	Samsung 22" LCD/TFT	Samsung
I.	UPS	
1	UPS for Control Room - 2 KVA	APC/Luminious/Microtek
2	UPS for Cameras - 600VA	APC/Luminious/Microtek

VMS BOQ - Loose Supply

Sr. No.	Description	Make
A.	Cameras quoted	
1	SNC-ER 550 (CP-16, 09, 05)	Sony
B.	Housings & Others	
1	PTZ Camera Housing	Sony
2	Gooseneck Stand -Wall mount bracket -WM82	Sony
3	Power Supply for PTZ Camera	Guru/Protek/Powerpulse/Omron
C.	Cabinets & Junction Boxes	
2	Junction Box	Hulasi/Pyrotech/MTS/Jasper
D.	Networking Components	
1	Media Converter (Box Type)	San-Telequip/Comnet/TP-Link
2	Media Converter (Card Type)	San-Telequip/Comnet/TP-Link
3	LIU - FO Patch Panel - 06 Port (Loaded)	Digilink/D-Link/UL/TYCO/Lightline
4	LIU FO Patch Panel - 24 Port (Loaded)	Digilink/D-Link/UL/TYCO/Lightline
E.	UPS	
2	UPS for Cameras - 600VA	APC/Luminious/Microtek

Annexure - C-1 (For Reference only)

S. No	Item	Agreed Make (24.04.14)
1	PTZ Camera (IP Based)	Sony (Model no SNCRS86P) & Pelco -SD4E36 (outdoor), Pelco - SD4E29 (indoor)
2	Analogue Camera Models	Sony (SSC-SD36P) & Pelco SD4-29
2	PTZ Controller	Sony & Pelco (PTZ controller to be of the same make as of PTZ Camera)
3	IP66 Housing for PTZ Camera	Sony & Pelco (Same Make as of Camera)
4	Main Server	HP/IBM/DELL/SAMSUNG
5	Desktop PC	HP/DELL/SONY
6	22" TFT	HP/DELL/SONY
7	Monitoring storage server, network based	Sony/HP/IBM
8	Media converter (Industrial grade)	Ruggedcom/ Garrarcom/ OSD Australic/San-Telequip
9	Optical fibre	Finolex/ Aksh Bhiwadi / AMP
10	LIU (24 PORT)	Tyco/ Digilink
11	Connector and cable for LIU	Tyco/ TP- Link
12	Connector and coupler for Fibre Splicing	AMP (Should be of Same make as of the Fibre)
13	27U networking Rack	HCL,APW PRESIDENT
14	Premier Control Panel	Rittal/ APW president/ Pyrotech
15	Quad beam detector	Optex/Enforcer/Bosch/ Honeywell

		Honeywell
16	Sound System	Bose/Sony
17	Panic Switch	Honeywell
18	22AWG 14/38-8 Core twisted copper cable for panel to beam detector	Paramount/ Cords/ KEI/ Havells/ Polycab
19	Analogue Camera	Sony/ Pelco
20	Digital Video recorder system (DVR)	Sony/ Pelco /Bosch
21	Video Matrix Switcher	Extron/AMX/CRESTRON
22	Video Matrix Switcher with VGA	Extron/AMX/CRESTRON
23	Digital keyboard	HP/IBM/Dell/Samsung
24	BNC for Video	Setmi/KRAMER/BELDEN
25	10/100,48 port Port switch	Cisco/ Ruggedcom
26	Network video recorder	Sony/HP/Dell/Samsung
27	Video management software	Sony/ Pelco (Video management software of the same make as of Camera)

FIRST ANGLE PROJECTION (ALL DIMENSIONS ARE IN MM.)



BILL OF QUANTITY - 400KV			
ITEM CODE	DESCRIPTION	SYMBOL	QTY.
1	500 MVA, 400/230/138KV, 3-Ph. AUTO TRANSFORMER		02
2	400KV, 125MVAR BUS REACTOR (3-Ph)		01
3	400KV, 2000A, 50MVA/110 CIRCUIT BREAKER WITHOUT PM (WITH CSO) (3-Ph)		03
4	400KV, 3150A, 50MVA/110 CIRCUIT BREAKER WITHOUT PM (WITH CSO) (3-Ph)		01
5	400KV, 3150A, 50MVA/110 CIRCUIT BREAKER WITH PM (WITH CSO) (3-Ph)		01
6	400KV, 2000A, 50MVA/110 CIRCUIT BREAKER WITH PM (WITH CSO) (3-Ph)		09
7	400KV, 3150A, 50MVA/110 CIRCUIT BREAKER WITH PM (WITH CSO) (3-Ph)		05
8	400KV, 3000/11A, 8 CORE, 50MVA/110 CT (1-Ph) WITH 1200 EXTENDED CURRENT RATING		13
9	330KV, 200A SURGE ARRESTER (1-Ph)		09
10	400KV POST INSULATOR		23


BILL OF QUANTITY - 220KV			
ITEM CODE	DESCRIPTION	SYMBOL	QTY.
1	245KV, 1600A, 40MVA/110 CIRCUIT BREAKER (3-Ph)		02
2	245KV, 1600A, 40MVA/110 CIRCUIT BREAKER WITH 2 E/S (3-Ph)		02
3	245KV, 1600A, 40MVA/110 CIRCUIT BREAKER WITH 1 E/S (3-Ph)		02
4	245KV, 1600A, 40MVA/110 CIRCUIT BREAKER WITHOUT E/S (3-Ph)		04
5	245KV, 1600/11A, 5 CORE, 40MVA/110 CT (1-Ph) WITH 1200 EXTENDED CURRENT RATING		06
6	210KV SURGE ARRESTER (1-Ph)		06
7	245KV POST INSULATOR (HIGH LEVEL)		06
8	245KV POST INSULATOR		20

SYSTEM PARAMETERS :-	
1. NOMINAL SYSTEM VOLTAGE	400KV
2. SYSTEM FREQUENCY	50HZ
3. RATED SHORT TIME CURRENT FOR 1 SEC	50KA
4. RATED SHORT TIME CURRENT FOR 3 SEC	50KA
5. RATED FULL WAVE WITHSTAND VOLTAGE	1500KV
6. RATED FULL WAVE WITHSTAND VOLTAGE	1500KV
7. MINIMUM CLEARANCE (2500MM)	15000MM
8. SYSTEM NEUTRAL EARTHING	EFFECTIVELY EARTHED

CLEARANCE TABLE :-	
MINIMUM CLEARANCE TABLE	400KV
PHASE TO PHASE (PP)	4000/4200mm
PHASE TO EARTH (PE)	3500mm
SECTION CLEARANCE (SC)	5000mm
HEIGHT OF TOWER CENTRE LINE OF FIRST LEVEL (MIN.) (FROM POINT LEVEL)	8000mm
500KV	5900mm

DETAILS OF TOWERS/BEAMS : 400KV			
S.NO.	STR. DESIGNATION	STR. HT/SPAN	QTY.
1	TC	15M	04
2	TH	22M+7.5M	02
3	TI	22M+7.5M	02
4	TL	22M+7.5M	04
5	TH	15M+7M+7.5M	02
6	TH	15M+7M+7.5M	02
7	GI	24M	04
8	GI	24M	04

DETAILS OF TOWERS/BEAMS : 245KV			
S.NO.	STR. DESIGNATION	STR. HT/SPAN	QTY.
1	OC	11.7M	04
2	CTC	11.7M+5.5M+5M	02
3	CTC	11.7M	03
4	CTH	11.7M	06
5	CTI	11.7M+5.5M+5M	01
6	BCI	18M	08
7	BI	18M	03
8	LM	50M	02



REFERENCE DWG :-

TYPE	NO.	TITLE
1	17/000/25/28/38-1/TURKISH-EXT/400KV-SEC./001, R0	400KV LAYOUT SECTION (TYPICAL)
2	17/000/25/28/38-1/TURKISH-EXT/400KV-SEC./001, R1	LAYOUT PLAN (TYPICAL)
3	17/000/25/28/38-1/TURKISH-EXT/400KV-SEC./001, R2	GENERAL ARRANGEMENT DRAWING
4	17/000/25/28/38-1/TURKISH-EXT/400KV-SEC./001, R3	SHIELDING CALCULATION FOR 400/230KV
5	17/000/25/28/38-1/TURKISH-EXT/400KV-SEC./001, R4	SHIELDING CALCULATION FOR 230/138KV

REVISIONS	
NO.	DESCRIPTION
1	ISSUED FOR TENDER
2	ISSUED FOR TENDER
3	ISSUED FOR TENDER
4	ISSUED FOR TENDER
5	ISSUED FOR TENDER
6	ISSUED FOR TENDER
7	ISSUED FOR TENDER
8	ISSUED FOR TENDER
9	ISSUED FOR TENDER
10	ISSUED FOR TENDER

REVISIONS	
NO.	DESCRIPTION
1	ISSUED FOR TENDER
2	ISSUED FOR TENDER
3	ISSUED FOR TENDER
4	ISSUED FOR TENDER
5	ISSUED FOR TENDER
6	ISSUED FOR TENDER
7	ISSUED FOR TENDER
8	ISSUED FOR TENDER
9	ISSUED FOR TENDER
10	ISSUED FOR TENDER

LEGEND TABLE :-	
SYMBOL	DESCRIPTION
	400KV BUSBAR
	245KV BUSBAR
	138KV BUSBAR
	110KV BUSBAR
	70KV BUSBAR
	33KV BUSBAR
	10KV BUSBAR
	0.4KV BUSBAR
	400KV CIRCUIT BREAKER
	245KV CIRCUIT BREAKER
	138KV CIRCUIT BREAKER
	110KV CIRCUIT BREAKER
	70KV CIRCUIT BREAKER
	33KV CIRCUIT BREAKER
	10KV CIRCUIT BREAKER
	0.4KV CIRCUIT BREAKER

STRINGING DETAILS (220KV) :-	
ITEM	DESCRIPTION
1	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
2	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
3	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
4	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
5	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
6	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
7	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
8	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
9	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
10	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE

STRINGING DETAILS (400KV) :-	
ITEM	DESCRIPTION
1	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
2	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
3	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
4	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
5	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
6	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
7	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
8	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
9	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
10	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE

STRINGING DETAILS (400KV) :-	
ITEM	DESCRIPTION
1	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
2	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
3	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
4	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
5	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
6	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
7	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
8	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
9	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
10	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE

STRINGING DETAILS (400KV) :-	
ITEM	DESCRIPTION
1	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
2	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
3	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
4	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
5	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
6	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
7	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
8	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
9	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE
10	400KV SWAYBRACE WITH LM FOR 220KV SWAYBRACE


REVISIONS	
NO.	DESCRIPTION
1	ISSUED FOR TENDER
2	ISSUED FOR TENDER
3	ISSUED FOR TENDER
4	ISSUED FOR TENDER
5	ISSUED FOR TENDER
6	ISSUED FOR TENDER
7	ISSUED FOR TENDER
8	ISSUED FOR TENDER
9	ISSUED FOR TENDER
10	ISSUED FOR TENDER

REVISIONS	
NO.	DESCRIPTION
1	ISSUED FOR TENDER
2	ISSUED FOR TENDER
3	ISSUED FOR TENDER
4	ISSUED FOR TENDER
5	ISSUED FOR TENDER
6	ISSUED FOR TENDER
7	ISSUED FOR TENDER
8	ISSUED FOR TENDER
9	ISSUED FOR TENDER
10	ISSUED FOR TENDER


REVISIONS	
NO.	DESCRIPTION
1	ISSUED FOR TENDER
2	ISSUED FOR TENDER
3	ISSUED FOR TENDER
4	ISSUED FOR TENDER
5	ISSUED FOR TENDER
6	ISSUED FOR TENDER
7	ISSUED FOR TENDER
8	ISSUED FOR TENDER
9	ISSUED FOR TENDER
10	ISSUED FOR TENDER

REVISIONS	
NO.	DESCRIPTION
1	ISSUED FOR TENDER
2	ISSUED FOR TENDER
3	ISSUED FOR TENDER
4	ISSUED FOR TENDER
5	ISSUED FOR TENDER
6	ISSUED FOR TENDER
7	ISSUED FOR TENDER
8	ISSUED FOR TENDER
9	ISSUED FOR TENDER
10	ISSUED FOR TENDER

DRAWING NO. TB-D-393-516-002



NATIONAL INFORMATION B.O.M.		NAME / संस्था का नाम NAME OF COMPANY POLICE ONE CORPORATION & POLICE LTD. 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 90	
--------------------------------	--	---	--

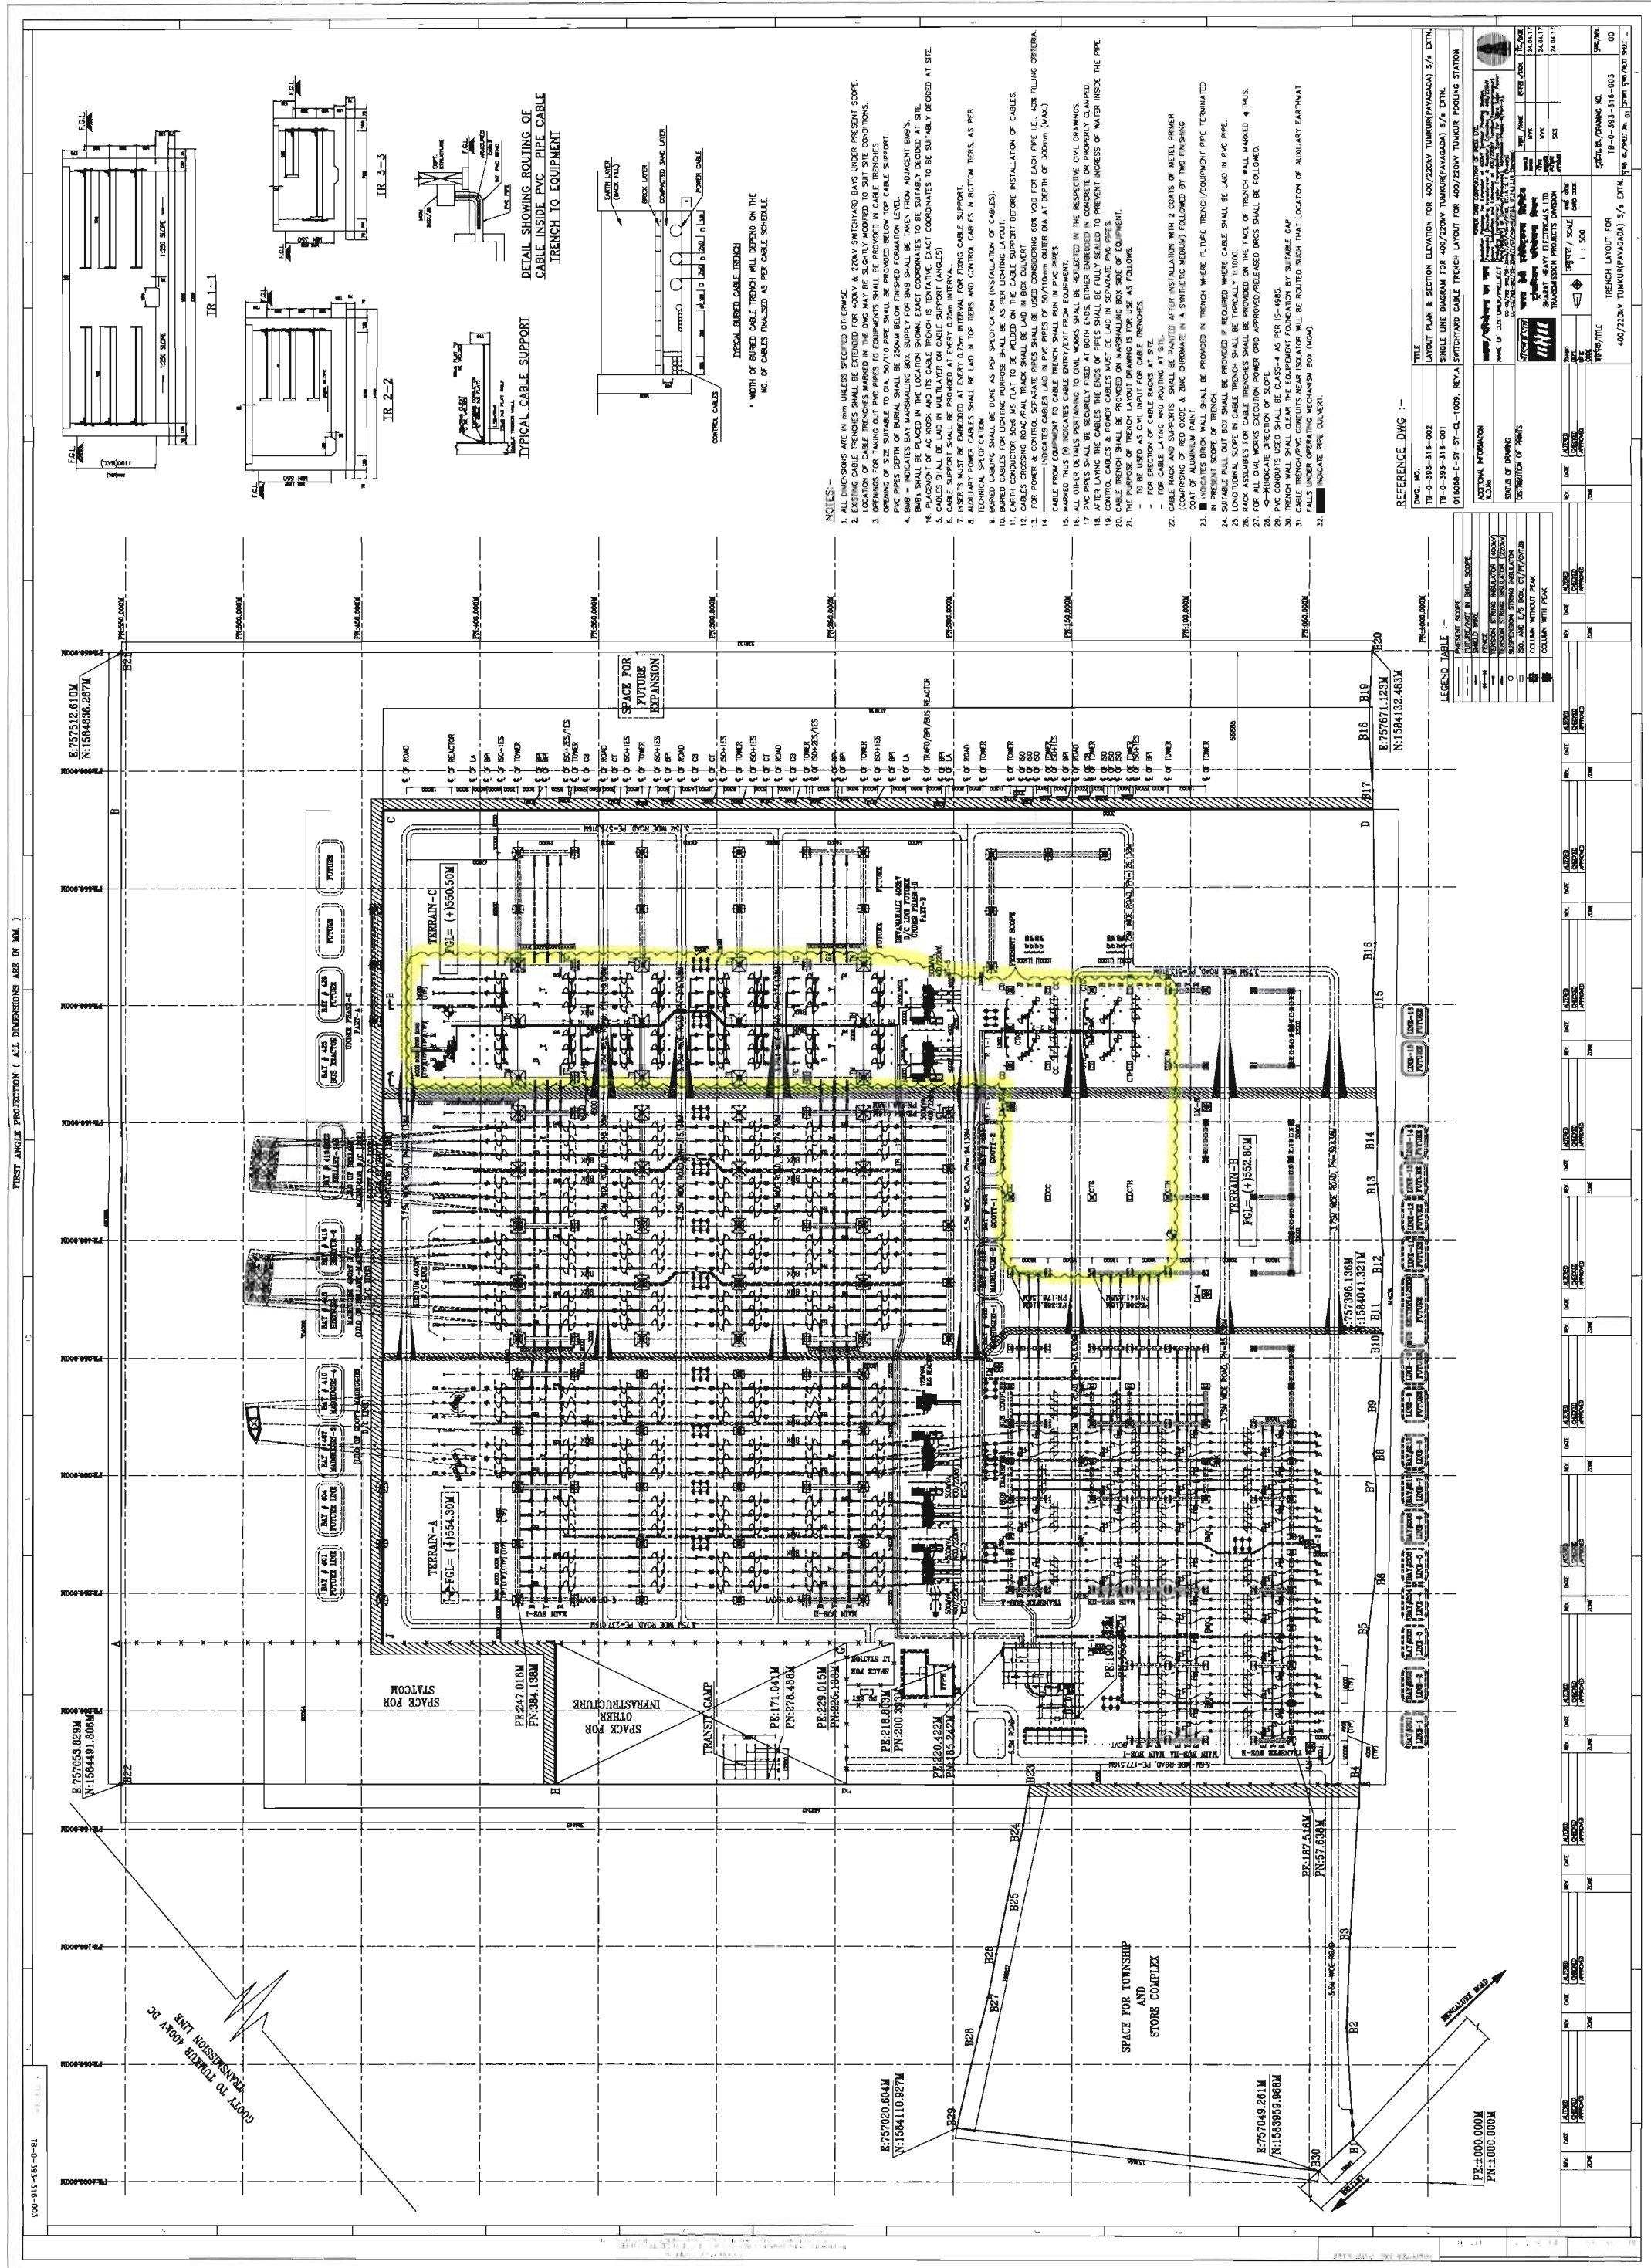

SECTION-3 PROJECT DETAILS & GENERAL SPECIFICATION

1.0 SITE INFORMATION

Sl No	Particulars	Details
PROJECT DETAILS		
a)	Owner	Power Grid Corporation of India (POWERGRID)
b)	Customer	Power Grid Corporation of India (POWERGRID)
c)	Project Title	Substation Package for Extension of 400kV Tumkur Pooling station (Pavagada) (including transformer & Reactor), Extension of 400/220kV Mysore Substation and Extension of 400/220kV Tumkur (Vasanthnarsapur) (Including Transformer) under Transmission System for Ultra Megar Solar Power Park (2000MW) at Tumkur (Pavagada), Karnataka-Phase-II (Part-A)
d)	Location	1. Tumkur (at Pavagada), Karnataka 2. Mysore, Karnataka 3. Tumkur (at Vasanthnarsapur) (Existing Madhugiri Substation), Karnataka
e)	Transport Facilities	Road/ Train/Air Connectivity: Nearest Railway Station 1. Tumkur (at Pavagada), Karnataka: Hindupur (AP)/ Bengaluru 2. Mysore, Karnataka: Mysore/ Mysore 3. Tumkur (at Vasanthnarsapur) (Existing Madhugiri Substation), Karnataka: Tumkur/ Bengaluru
SITE CONDITIONS		
a)	Max. ambient air temp.	50°C
b)	Min. ambient air temp.	0°C
c)	Max. design ambient emp.	50°C
d)	Design reference temp.	50°C
e)	Average Humidity	Shall be provided during detailed engineering.
f)	Special	Shall be provided during detailed

	corrosion conditions	engineering.
g)	Solar Radiation	Shall be provided during detailed engineering.
h)	Atmospheric UV radiation	Shall be provided during detailed engineering.
i)	Altitude above sea level	Less than 1000 meter above sea level (MSL)
j)	Snow Fall	NIL
k)	Seismic Zone	As per IS 1893
l)	Wind Zone	As per IS 875
MAIN ELECTRICAL PARAMETERS:		
a)	Fault Levels	Tumkur (Pavagada) 400kV: 50kA for 1 sec. 220kV: 40kA for 1 sec. Mysore 400kV: 40kA for 1 sec. Tumkur (Vasantnarsapur i.e. existing Madhugiri SS) 400kV: 50kA for 1 sec 220kV: 40kA for 1 sec
a)	Creepage Distance	25mm/kV

2.0 GENERAL

This Section covers General Technical Requirements and Requirements of Auxiliary Items.

- 2.1 The contractor shall furnish catalogues, engineering data, technical information, design documents, drawings etc., fully in conformity with the technical specification during detailed engineering.
- 2.2 It is recognized that the Contractor may have standardised on the use of certain components, materials, processes or procedures different from those specified herein. Alternate proposals offering similar equipment based on the manufacturer's standard practice will also be considered provided such proposals meet the specified designs, standard and performance requirements and are acceptable to Purchaser.
- 2.3 Wherever a material or article is specified or defined by the name of a particular brand, Manufacturer or Vendor, the specific name mentioned shall be understood as establishing type, function and quality and not as limiting competition. For lighting fixtures, makes shall be as defined in Section- Lighting System.
- 2.4 Equipment furnished shall be complete in every respect with all mountings, fittings, fixtures and standard accessories normally provided with such equipment and/or needed for erection, completion and safe operation of the equipment as required by applicable codes though they

may not have been specifically detailed in the Technical Specifications unless included in the list of exclusions. Materials and components not specifically stated in the specification and bid price schedule but which are necessary for commissioning and satisfactory operation of the switchyard/ substation unless specifically excluded shall be deemed to be included in the scope of the specification and shall be supplied without any extra cost. All similar standard components/parts of similar standard equipment provided, shall be inter-changeable with one another.

- 2.5 In case any Deviation Schedule, Bid Proposal Sheet, Schedule of Data Requirements (DRS), test reports or any other document/information are not furnished along-with the bid, the bid is liable to be rejected. Unless brought out clearly, the Bid will be deemed to conform to the specification scrupulously. All deviations from the specification shall be clearly brought out in the respective deviation schedule.
- 2.6 The Bidder shall clearly indicate in the bid, the specific standards in accordance with which the works will be carried out.
- 2.7 The equipment must be new, of highest grade, the best quality of their kind, to best engineering practice and latest state of art, and in accordance with purpose for which they are intended and ensure satisfactory performance throughout the service life.
- 2.8 All similar parts of the equipment shall be made to gauge and shall be interchangeable with and shall be made of same materials and workmanship as the corresponding parts of the equipment. Where feasible, common components, units shall be employed in different pieces of equipment in order to optimize the spare part stock-up and utilization.
- 2.9 The requirement regarding external RIV as specified for equipment shall include the terminal fittings and the equipment shall have been tested preferably with fittings, if any.

3.0 STANDARDS

- 3.1 The works covered by the specification shall be designed, engineered, manufactured, built, tested and commissioned in accordance with the Acts, Rules, Laws and Regulations of India.
- 3.2 The equipment to be furnished under this specification shall conform to latest issue with all amendments (as on the originally scheduled date of bid opening) of standard specified under Annexure-C of this section, unless specifically mentioned in the specification.
- 3.3 The Bidder shall note that standards mentioned in the specification are

not mutually exclusive or complete in themselves, but intended to complement each other.

- 3.4 The Contractor shall also note that list of standards presented in this specification is not complete. Whenever necessary the list of standards shall be considered in conjunction with specific IS/IEC.
- 3.5 When the specific requirements stipulated in the specifications exceed or differ than those required by the applicable standards, the stipulation of the specification shall take precedence.
- 3.6 Other internationally accepted standards which ensure equivalent or better performance than that specified in the standards specified under Annexure-C / individual sections for various equipment shall also, be accepted, however the salient points of difference shall be clearly brought out in the Additional information schedule of the bid along with English language version of such standard. The equipment conforming to standards other than specified under Annexure-C/ individual sections for various equipment shall be subject to POWERGRID's approval.

4.0 SERVICES TO BE PERFORMED BY THE EQUIPMENT BEING FURNISHED

- 4.1 The equipment furnished under this specification shall perform all its functions and operate satisfactorily without showing undue strain, restrike etc. under such over voltage conditions.
- 4.2 All equipment shall also perform satisfactorily under various other electrical, electromechanical and meteorological conditions of the site of installation.
- 4.3 All equipment shall be able to withstand all external and internal mechanical, thermal and electromechanical forces due to various factors like wind load, temperature variation, ice & snow, (wherever applicable) short circuit etc. for the equipment.
- 4.4 The bidder shall design terminal connectors of the equipment taking into account various forces that are required to withstand.
- 4.5 The equipment shall also comply with the following:
- a) To facilitate erection of equipment, all items to be assembled at site shall be "match marked".
 - b) All piping, if any between equipment control cabinet / operating mechanism to marshalling box of the equipment, shall bear proper identification to facilitate the connection at site.

5.0 ENGINEERING DATA AND DRAWINGS

- 5.1 The list of drawings/documents which are to be submitted to the Purchaser shall be discussed and finalised by the Purchaser at the time of award. The supplier shall necessarily submit all the drawings/ documents unless anything is waived.
- 5.2 The Contractor shall submit 4 (four) sets of drawings/ design documents /data / detailed bill of quantity and 1 (one) set of test reports for the approval of the Purchaser. The contractor shall also submit the softcopy of the above documents in addition to hardcopy.
- 5.3 Drawings:**
- 5.3.1 All drawings submitted by the Contractor shall be in sufficient detail to indicate the type, size, arrangement, material description, Bill of Materials, weight of each component, break-up for packing and shipment, dimensions, internal & the external connections, fixing arrangement required and any other information specifically requested in the specifications.
- 5.3.2 Drawings submitted by the Contractor shall be clearly marked with the name of the Purchaser, the unit designation, the specifications title, the specification number and the name of the Project. POWERGRID has standardized a large number of drawings/documents of various make including type test reports which can be used for all projects having similar requirements and in such cases no project specific approval (except for list of applicable drawings alongwith type test reports) is required. However, distribution copies of standard drawings/documents shall be submitted as per provision of the contract. All titles, noting, markings and writings on the drawing shall be in English. All the dimensions should be in SI units.
- 5.3.3 The review of these data by the Purchaser will cover only general conformance of the data to the specifications and documents, interfaces with the equipment provided under the specifications, external connections and of the dimensions which might affect substation layout. This review by the Purchaser may not indicate a thorough review of all dimensions, quantities and details of the equipment, materials, any devices or items indicated or the accuracy of the information submitted. This review and/or approval by the Purchaser shall not be considered by the Contractor, as limiting any of his responsibilities and liabilities for mistakes and deviations from the requirements, specified under these specifications and documents.
- 5.3.4 All manufacturing and fabrication work in connection with the equipment prior to the approval of the drawings shall be at the Contractor's risk. The Contractor may make any changes in the design which are

necessary to make the equipment conform to the provisions and intent of the Contract and such changes will again be subject to approval by the Purchaser. Approval of Contractor's drawing or work by the Purchaser shall not relieve the contractor of any of his responsibilities and liabilities under the Contract.

- 5.3.5 All engineering data submitted by the Contractor after final process including review and approval by the Purchaser shall form part of the Contract Document and the entire works performed under these specifications shall be performed in strict conformity, unless otherwise expressly requested by the Purchaser in Writing.

5.3.6 Approval Procedure

The scheduled dates for the submission of the drawings as well as for, any data/information to be furnished by the Purchaser would be discussed and finalised at the time of award. The following schedule shall be followed generally for approval and for providing final documentation.

- | | |
|---|--|
| (i) Approval/comments by Purchaser on initial submission | As per agreed schedule |
| (ii) Resubmission (whenever required) | Within 3 (three) weeks from date of comments |
| (iii) Approval or comments | Within 3 (three) weeks of receipt of resubmission. |
| (iv) Furnishing of distribution copies (5 hard copies per substation and one scanned copy (pdf format) for Corporate Centre) | 2 weeks from the date of approval |
| (v) Furnishing of distribution copies of test reports | |
| (a) Type test reports (one scanned softcopy in pdf format per substation plus one for corporate centre & one hardcopy per substation) | 2 weeks from the date of final approval |
| (b) Routine Test Reports (one copy for each substation) | -do- |
| (vi) Furnishing of instruction/ operation manuals (2 copies per substation and one softcopy (pdf format) for corporate centre & per substation) | As per agreed schedule |
| (vii) As built drawings (two sets of hardcopy per substation & one softcopy (pdf format) for | On completion of entire works |

corporate centre& per substation)

NOTE:

- (1) The supplier may please note that all resubmissions must incorporate all comments given in the earlier submission by BHEL/POWERGRID or adequate justification for not incorporating the same must be submitted failing which the submission of documents is likely to be returned.
- (2) All drawings should be submitted in softcopy form, however substation design drawings like SLD, GA, all layouts etc. shall also be submitted in AutoCAD Version. SLD, GA & layout drawings shall be submitted for the entire substation in case of substation extension also.
- (3) The instruction Manuals shall contain full details of drawings of all equipment being supplied under this contract, their exploded diagrams with complete instructions for storage, handling, erection, commissioning, testing, operation, trouble shooting, servicing and overhauling procedures.
- (4) If after the commissioning and initial operation of the substation, the instruction manuals require any modifications/additions/changes, the same shall be incorporated and the updated final instruction manuals shall be submitted by the supplier to BHEL/POWERGRID.
- (5) The manufacturer shall furnish to the Purchaser catalogues of spare parts.
- (6) All As-built drawings/documents shall be certified by site indicating the changes before final submission.

6.0 MATERIAL WORKMANSHIP

6.1 General Requirement

- 6.1.1 Where the specification does not contain references to workmanship, equipment, materials and components of the covered equipment, it is essential that the same must be new, of highest grade of the best quality of their kind, conforming to best engineering practice and suitable for the purpose for which they are intended.
- 6.1.2 In case where the equipment, materials or components are indicated in the specification as "similar" to any special standard, the Purchaser shall decide upon the question of similarity. When required by the specification or when required by the Purchaser the Contractor shall submit, for approval, all the information concerning the materials or components to be used in manufacture. Machinery, equipment, materials and components supplied, installed or used without such approval shall run the risk of subsequent rejection, it being

understood that the cost as well as the time delay associated with the rejection shall be borne by the supplier.

- 6.1.3 The design of the Works shall be such that installation, future expansions, replacements and general maintenance may be undertaken with a minimum of time and expenses. Each component shall be designed to be consistent with its duty and suitable factors of safety, subject to mutual agreements. All joints and fastenings shall be devised, constructed and documented so that the component parts shall be accurately positioned and restrained to fulfill their required function. In general, screw, threads shall be standard metric threads. The use of other thread forms will only be permitted when prior approval has been obtained from the BHEL/POWERGRID.
- 6.1.4 Whenever possible, all similar part of the Works shall be made to gauge and shall also be made interchangeable with similar parts. All spare parts shall also be interchangeable and shall be made of the same materials and workmanship as the corresponding parts of the Equipment supplied under the Specification. Where feasible, common component units shall be employed in different pieces of equipment in order to minimize spare parts stocking requirements. All equipment of the same type and rating shall be physically and electrically interchangeable.
- 6.1.5 All materials and equipment shall be installed in strict accordance with the manufacturer's recommendation(s). Only first-class work in accordance with the best modern practices will be accepted. Installation shall be considered as being the erection of equipment at its permanent location. This unless otherwise specified, shall include unpacking, cleaning and lifting into position, grouting, levelling, aligning, coupling of or bolting down to previously installed equipment bases/foundations, performing the alignment check and final adjustment prior to initial operation, testing and commissioning in accordance with the manufacturer's tolerances, instructions and the Specification. All factory assembled rotating machinery shall be checked for alignment and adjustments made as necessary to re-establish the manufacturer's limits suitable guards shall be provided for the protection of personnel on all exposed rotating and / or moving machine parts and shall be designed for easy installation and removal for maintenance purposes. The spare equipment(s) shall be installed at designated locations and tested for healthiness.
- 6.1.6 The supplier shall apply oil and grease of the proper specification to suit the machinery, as is necessary for the installation of the equipment. Lubricants used for installation purposes shall be drained out and the system flushed through where necessary for applying the lubricant required for operation. The supplier shall apply all operational

lubricants to the equipment installed by him.

- 6.1.7 All oil, grease and other consumables used in the Works/ Equipment shall be purchased in India unless the Contractor has any special requirement for the specific application of a type of oil or grease not available in India. In such is the case he shall declare in the proposal, where such oil or grease is available. He shall help POWERGRID in establishing equivalent Indian make and Indian Contractor. The same shall be applicable to other consumables too.
- 6.1.8 Corona and radio interference voltage test and seismic withstand test (for 132kV and above voltage level) procedures for equipments shall be in line with the procedure given at Annexure-A and B respectively.

6.2 Provisions for Exposure to Hot and Humid climate

Outdoor equipment supplied under the specification shall be suitable for service and storage under tropical conditions of high temperature, high humidity, heavy rainfall and environment favourable to the growth of fungi and mildew. The indoor equipments located in non-air conditioned areas shall also be of same type.

6.2.1 Space Heaters

- 6.2.1.1 The heaters shall be suitable for continuous operation at 240V as supply voltage. On-off switch and fuse shall be provided.
- 6.2.1.2 One or more adequately rated thermostatically connected heaters shall be supplied to prevent condensation in any compartment. The heaters shall be installed in the compartment and electrical connections shall be made sufficiently away from below the heaters to minimize deterioration of supply wire insulation. The heaters shall be suitable to maintain the compartment temperature to prevent condensation.
- 6.2.1.3 Suitable anti condensation heaters with the provision of thermostat shall be provided.

6.2.2 FUNGI STATIC VARNISH

Besides the space heaters, special moisture and fungus resistant varnish shall be applied on parts which may be subjected or predisposed to the formation of fungi due to the presence or deposit of nutrient substances. The varnish shall not be applied to any surface of part where the treatment will interfere with the operation or performance of the equipment. Such surfaces or parts shall be protected against the application of the varnish.

6.2.3 Ventilation opening

Wherever ventilation is provided, the compartments shall have ventilation openings with fine wire mesh of brass to prevent the entry of insects and to reduce to a minimum the entry of dirt and dust. Outdoor compartment openings shall be provided with shutter type blinds and suitable provision shall be made so as to avoid any communication of air / dust with any part in the enclosures of the Control Cabinets, Junction boxes and Marshalling Boxes, panels etc.

6.2.4 Degree of Protection

The enclosures of the Control Cabinets, Junction boxes and Marshalling Boxes, panels etc. to be installed shall provide degree of protection as detailed here under:

- a) Installed out door: IP-55
- b) Installed indoor in air conditioned area: IP-31
- c) Installed in covered area: IP-52
- d) Installed indoor in non air conditioned area where possibility of entry of water is limited: IP-41
- e) For LT Switchgear (AC & DC distribution Boards): IP-52

The degree of protection shall be in accordance with IS: 13947 (Part-I) / IEC-60947(Part-I) / IS 12063 / IEC-60529. Type test report for degree of protection test, shall be submitted for approval.

6.3 RATING PLATES, NAME PLATES AND LABELS

Each main and auxiliary item of substation is to have permanently attached to it in a conspicuous position a rating plate of non-corrosive material upon which is to be engraved manufacturer's name, year of manufacture, equipment name, type or serial number together with details of the loading conditions under which the item of substation in question has been designed to operate, and such diagram plates as may be required by the Purchaser. The rating plate of each equipment shall be according to IEC requirement.

All such nameplates, instruction plates, rating plates of transformers, reactors, CB, CT, CVT, SA, Isolators, C & R panels and PLCC equipments shall be bilingual with Hindi inscription first followed by English. Alternatively two separate plates one with Hindi and the other with English inscriptions may be provided.

6.4 FIRST FILL OF CONSUMABLES, OIL AND LUBRICANTS

All the first fill of consumables such as oils, lubricants, filling compounds, touch up paints, soldering/brazing material for all copper piping of circuit breakers and essential chemicals etc. which will be required to put

the equipment covered under the scope of the specifications, into successful Operation, shall be furnished by the supplier unless specifically excluded under the exclusions in these specifications and documents.

7.0 DESIGN IMPROVEMENTS / COORDINATION

- 7.1 The bidder shall note that the equipment offered by him in the bid only shall be accepted for supply. However, the Purchaser or the Contractor may propose changes in the specification of the equipment or quality thereof and if the Purchaser & contractor agree upon any such changes, the specification shall be modified accordingly.
- 7.2 If any such agreed upon change is such that it affects the price and schedule of completion, the parties shall agree in writing as to the extent of any change in the price and/or schedule of completion before the Contractor proceeds with the change. Following such agreement, the provision thereof, shall be deemed to have been amended accordingly.
- 7.3 The supplier shall be responsible for the selection and design of appropriate equipments to provide the best co-ordinated performance of the entire system. The basic design requirements are detailed out in this Specification. The design of various components, sub-assemblies and assemblies shall be so done that it facilitates easy field assembly and maintenance.
- 7.4 The supplier has to coordinate designs and terminations with the agencies (if any) who are Consultants/Contractor for the Purchaser. The names of agencies shall be intimated to the successful bidders.
- 7.5 The supplier will be called upon to attend design co-ordination meetings with the Engineer, other Contractor's and the Consultants of the Purchaser (if any) during the period of Contract. The Contractor shall attend such meetings at his own cost at POWERGRID Corporate Centre, Gurgaon (Haryana) or at mutually agreed venue as and when required and fully cooperate with such persons and agencies involved during those discussions.

8.0 QUALITY ASSURANCE PROGRAMME

- 8.1 To ensure that the equipment and services under the scope of this Contract whether manufactured or performed within the supplier's Works or at his Sub-contractor's premises or at the Purchaser's site or at any other place of Work are in accordance with the specifications, the supplier shall adopt suitable quality assurance programme to control such activities at all points necessary. The detailed programme shall be submitted by the contractor after the award for reference. A quality assurance programme of the supplier shall generally cover the

following:

- (a) His organization structure for the management and implementation of the proposed quality assurance programme;
- (b) Documentation control system;
- (c) Qualification data for bidder's key personnel;
- (d) The procedure for purchases of materials, parts components and selection of sub-Contractor's services including vendor analysis, source inspection, incoming raw material inspection, verification of material purchases etc.
- (e) System for shop manufacturing and site erection controls including process controls and fabrication and assembly control;
- (f) Control of non-conforming items and system for corrective actions;
- (g) Inspection and test procedure both for manufacture and field activities.
- (h) Control of calibration and testing of measuring instruments and field activities;
- (i) System for indication and appraisal of inspection status;
- (j) System for quality audits;
- (k) System for authorising release of manufactured product to the Purchaser.
- (l) System for maintenance of records;
- (m) System for handling storage and delivery; and
- (n) A quality plan detailing out the specific quality control measures and procedures adopted for controlling the quality characteristics relevant to each item of equipment furnished and/or services rendered.

POWERGRID/BHEL or his duly authorised representative reserves the right to carry out quality audit and quality surveillance of the system and procedure of the supplier/his vendor's quality management and control activities.

8.2 Quality Assurance Documents

The supplier would be required to submit all the Quality Assurance Documents as stipulated in the Quality Plan at the time of POWERGRID/BHEL inspection of equipment/ material

9.0 TYPE TESTING, INSPECTION, TESTING & INSPECTION CERTIFICAT

9.1 All equipment being supplied shall conform to type tests as per technical specification and shall be subject to routine tests in accordance with requirements stipulated under respective sections.

9.2 The reports for all type tests as per technical specification shall be furnished by the supplier alongwith equipment / material drawings. However, type test reports of similar equipments/ material already accepted in POWERGRID shall be applicable for all project with similar requirement. The type tests conducted earlier should have either been conducted in accredited laboratory (accredited based on ISO / IEC Guide 25 / 17025 or EN 45001 by the national accreditation body of the country where laboratory is located) or witnessed by POWERGRID or representative authorized by POWERGRID or Utility or representative of accredited test lab or reputed consultant.

The test reports submitted shall be of the tests conducted within last 10 (ten) years prior to the originally scheduled date of bid opening i.e. 08.08.2016. In case the test reports are of the test conducted earlier than 10 (ten) years prior to the date of bid opening, the contractor shall repeat these test(s) at no extra cost to BHEL.

However, in case of instrument transformers, the following type tests should have been conducted within 5 (five) years prior to the originally scheduled date of bid opening.

- i) Lightning Impulse Test
- ii) Switching ImpulseTest
- iii) Multiple Chopped Impulse Test (For CT)
- iv) Chopped Impulse Test (For CVT)

In case the test reports are of these tests (for instrument transformers) as mentioned above are conducted earlier than 5 (five) years prior to the originally scheduled date of bid opening i.e. **08.08.2016**, the contractor shall repeat these test(s) at no extra cost to the purchaser.

Further, in the event of any discrepancy in the test reports i.e. any test report not acceptable due to any design/manufacturing changes (including substitution of components) or due to non-compliance with the requirement stipulated in the Technical Specification or any/all type tests not carried out, same shall be carried out without any additional cost implication to the Purchaser.

The supplier shall intimate the BHEL/POWERGRID the detailed program about the tests atleast two (2) weeks in advance in case of domestic

supplies & six (6) weeks in advance in case of foreign supplies.

Further, in case type tests are required to be conducted/repeated and the deputation of Inspector/Purchaser's representative is required, then all the expenses shall be borne by the supplier.

- 9.3 The Purchaser intends to repeat the type tests on Power Transformer and Shunt Reactor except Dynamic short circuit tests on transformers, for which test charges shall be payable as per provision of contract. The price of conducting type tests shall be included in Bid price and break up of these shall be given in the relevant schedule of Bid Proposal Sheets. These Type test charges would be considered in bid evaluation. In case Bidder does not indicate charges for any of the type tests or does not mention the name of any test in the price schedules, it will be presumed that the particular test has been offered free of charge. Further, in case any Bidder indicates that he shall not carry out a particular test, his offer shall be considered incomplete and shall be liable to be rejected. BHEL/POWERGRID reserves the right to witness any or all the type tests. The BHEL/POWERGRID also reserves the right to waive the repeating of type tests partly or fully and in case of waiver, test charges for the same shall not be payable.

The Purchaser shall bear all expenses for deputation of purchaser's representative(s) for witnessing the type tests under this clause except in the case of re-deputation if any, necessitated due to no fault of the purchaser.

For outdoor receptacles, trefoil clamps, diesel engine, alternator, motors, cable glands, lighting fixtures, ACSR/AAC conductor, IPS aluminum tube and junction boxes, type test reports are not required to be submitted for the makes indicated at Annexure-C /POWERGRID approved list of subvendors. For the new makes(other than those indicated at Annexure-C / POWERGRID approved list of subvendors), type test reports as per relevant standard shall be submitted for BHEL/POWERGRID's approval.

- 9.4 The Purchaser, his duly authorised representative and/or outside inspection agency acting on behalf of the Purchaser shall have at all reasonable times free access to the Contractor's/sub-vendors premises or Works and shall have the power at all reasonable times to inspect and examine the materials and workmanship of the Works during its manufacture or erection if part of the Works is being manufactured or assembled at other premises or works, the Contractor shall obtain for the Engineer and for his duly authorised representative permission to inspect as if the works were manufactured or assembled on the Contractor's own premises or works. Inspection

may be made at any stage of manufacture, despatch or at site at the option of the Purchaser and the equipment if found unsatisfactory due to bad workmanship or quality, material is liable to be rejected.

- 9.5 The supplier shall give the Purchaser /Inspector fifteen (15) days written notice for on-shore and six (6) weeks notice for off-shore material being ready for joint testing including contractor and POWERGRID. Such tests shall be to the Contractor's account except for the expenses of the Inspector. The Purchaser/inspector, unless witnessing of the tests is virtually waived, will attend such tests within fifteen (15) days of the date of which the equipment is notified as being ready for test/inspection, failing which the Contractor may proceed alone with the test which shall be deemed to have been made in the Inspector's presence and he shall forthwith forward to the Inspector duly certified copies of tests in triplicate.
- 9.6 The Purchaser or Inspector shall, within fifteen (15) days from the date of inspection as defined herein give notice in writing to the Contractor, of any objection to any drawings and all or any equipment and workmanship which in his opinion is not in accordance with the Contract. The Contractor shall give due consideration to such objections and shall either make the modifications that may be necessary to meet the said objections or shall confirm in writing to the Purchaser /Inspector giving reasons therein, that no modifications are necessary to comply with the Contract.
- 9.7 When the factory tests have been completed at the Contractor's or Sub- Contractor's works, the Purchaser/inspector shall issue a certificate to this effect within fifteen (15) days after completion of tests but if the tests are not witnessed by the Purchaser /Inspector, the certificate shall be issued within fifteen (15) days of receipt of the Contractor's Test certificate by the Engineer/Inspector. Failure of the Purchaser /Inspector to issue such a certificate shall not prevent the Contractor from proceeding with the Works. The completion of these tests or the issue of the certificate shall not bind the Purchaser to accept the equipment should, it, on further tests after erection, be found not to comply with the Contract. The equipment shall be dispatched to site only after approval of test reports and issuance of CIP by the Purchaser.
- 9.8 In all cases where the Contract provides for tests whether at the premises or at the works of the Contractor or of any Sub-Contractor, the Contractor except where otherwise specified shall provide free of charge such items as labour, materials, electricity, fuel, water, stores,

apparatus and instruments as may be reasonably demanded by the Purchaser /Inspector or his authorised representative to carry out effectively such tests of the equipment in accordance with the Contract and shall give facilities to the Purchaser /Inspector or to his authorised representative to accomplish testing.

9.9 The inspection by Purchaser and issue of Inspection Certificate thereon shall in no way limit the liabilities and responsibilities of the Contractor in respect of the agreed quality assurance programme forming a part of the Contract.

9.10 The Purchaser will have the right of having at his own expenses any other test(s) of reasonable nature carried out at Contractor's premises or at site or in any other place in addition of aforesaid type and routine tests, to satisfy that the material comply with the specification.

9.11 The Purchaser reserves the right for getting any field tests not specified in respective sections of the technical specification conducted on the completely assembled equipment at site. The testing equipment for these tests shall be provided by the Purchaser.

10.0 TESTS

10.1 Pre-commissioning Tests

On completion of erection of the equipment and before charging, each item of the equipment shall be thoroughly cleaned and then inspected jointly by the Purchaser and the Contractor for correctness and completeness of installation and acceptability for charging, leading to initial pre-commissioning tests at Site. The list of pre-commissioning tests to be performed are given in respective chapters and shall be included in the Contractor's quality assurance programme.

10.2 Commissioning Tests

10.2.1 The available instrumentation and control equipment will to be used during such tests and the Purchaser will calibrate, all such measuring equipment and devices as far as practicable.

10.2.2 Any special equipment, tools and tackles required for the successful completion of the Commissioning Tests shall be provided by the Contractor, free of cost.

10.2.3 The specific tests requirement on equipment have been brought out in the respective chapters of the technical specification.

10.3.3 The Contractor shall be responsible for obtaining statutory clearances from the concerned authorities for commissioning the

equipment and the switchyard. However necessary fee shall be reimbursed by POWERGRID on production of requisite documents.

11.0 PACKAGING & PROTECTION

11.1 All the equipment shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at Site till the time of erection. On request of the Purchaser, the Contractor shall also submit packing details/associated drawing for any equipment/material under his scope of supply, to facilitate the Purchaser to repack any equipment/material at a later date, in case the need arises. While packing all the materials, the limitation from the point of view of availability of Railway wagon sizes in India should be taken into account. The Bidder shall be responsible for any loss or damage during transportation, handling and storage due to improper packing. Any demurrage, wharfage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor. Purchaser takes no responsibility of the availability of the wagons.

11.2 All coated surfaces shall be protected against abrasion, impact, discoloration and any other damages. All exposed threaded portions shall be suitably protected with either a metallic or a non-metallic protecting device. All ends of all valves and piping and conduit equipment connections shall be properly sealed with suitable devices to protect them from damage.

12.0 FINISHING OF METAL SURFACES

12.1 All metal surfaces shall be subjected to treatment for anti-corrosion protection. All ferrous surfaces for external use unless otherwise stated elsewhere in the specification or specifically agreed, shall be hot-dip galvanized after fabrication. High tensile steel nuts & bolts and spring washers shall be electro galvanized to service condition 4. All steel conductors including those used for earthing/grounding (above ground level) shall also be galvanized according to IS:2629.

12.2 HOT DIP GALVANISING

12.2.1 The minimum weight of the zinc coating shall be 610 gm/sq.m and minimum average thickness of coating shall be 86 microns for all items having thickness 6mm and above. For items lower than 6mm thickness requirement of coating thickness shall be as per relevant ASTM. For surface which shall be embedded in concrete, the zinc coating shall be 610 gm/sq. m minimum.

12.2.2 The galvanized surfaces shall consist of a continuous and uniform thick coating of zinc, firmly adhering to the surface of steel. The finished

surface shall be clean and smooth and shall be free from defects like discoloured patches, bare spots, unevenness of coating, spelter which is loosely attached to the steel globules, spiky deposits, blistered surface, flaking or peeling off, etc. The presence of any of these defects noticed on visual or microscopic inspection shall render the material liable to rejection.

12.2.3 After galvanizing, no drilling or welding shall be performed on the galvanized parts of the equipment excepting that nuts may be threaded after galvanizing. Sodium dichromate treatment shall be provided to avoid formation of white rust after hot dip galvanization.

12.2.4 The galvanized steel shall be subjected to six one minute dips in copper sulphate solution as per IS-2633.

12.2.5 Sharp edges with radii less than 2.5 mm shall be able to withstand four immersions of the Standard Preece test. All other coatings shall withstand six immersions. The following galvanizing tests should essentially be performed as per relevant Indian Standards.

-Coating thickness

-Uniformity of zinc

-Adhesion test

-Mass of zinc coating

12.2.6 Galvanised material must be transported properly to ensure that galvanized surfaces are not damaged during transit. Application of zinc rich paint at site shall not be allowed.

12.3 PAINTING

12.3.1 All sheet steel work shall be degreased, pickled, and phosphated in accordance with the IS-6005 "Code of practice for phosphating iron and sheet". All surfaces, which will not be easily accessible after shop assembly, shall beforehand be treated and protected for the life of the equipment. The surfaces, which are to be finished painted after installation or require corrosion protection until installation, shall be shop painted with at least two coats of primer. Oil, grease, dirt and swarf shall be thoroughly removed by emulsion cleaning. Rust and scale shall be removed by pickling with dilute acid followed by washing with running water, rinsing with slightly alkaline hot water and drying.

12.3.2 After phosphating, thorough rinsing shall be carried out with clean water followed by final rinsing with dilute dichromate solution and oven drying. The phosphate coating shall be sealed with application of two coats of ready mixed, stoving type zinc chromate primer. The first coat may be "flash dried" while the second coat shall be stoved.

- 12.3.3 After application of the primer, two coats of finishing synthetic enamel paint shall be applied, each coat followed by stoving. The second finishing coat shall be applied after inspection of first coat of painting.
- 12.3.4 The exterior and interior colour of the paint in case of new substations shall preferably be RAL 7032 for all equipment, marshalling boxes, junction boxes, control cabinets, panels etc. Unless specifically mentioned under respective sections of the equipment. Glossy white color inside the equipment /boards/panels/junction boxes is also acceptable. The exterior colour for panels shall bematching with the existing panels in case of extension of a substation. Each coatof primer and finishing paint shall be of slightly different shade to enable inspection of the painting. A small quantity of finishing paint shall be supplied for minor touching up required at site after installation of the equipment.
- 12.3.5 In case the Bidder proposes to follow his own standard surface finish and protection procedures or any other established painting procedures, like electrostatic painting etc., the procedure shall be submitted alongwith the Bids for Purchaser's review & approval.
- 12.3.6 The colour scheme as given below shall be followed for Fire Protection and Air Conditioning systems

S.No.	PIPE LINE	Base color	Band color
Fire Protection Svstem			
1	Hydrant and Emulsifier system pipeline	FIRE RED	-
2	Emulsifier system detection line –	FIRE RED	Sea Green
3	Emulsifier system detection line – Air	FIRE RED	Sky Blue
4	Pylon support pipes	FIRE RED	
Air Conditionina Svstem			
5	Refrigerant gas pipeline – at compressor suction	Canary Yellow	-
6	Refrigerant gas pipeline – at compressor	Canary Yellow	Red
7	Refrigerant liquid pipeline	Dark Admiralty	-
8	Chilled water pipeline	Sea Green	-
9	Condenser water pipeline	Sea Green	Dark Blue

- 12.3.7 For aluminum casted surfaces, the surface shall be with smooth finish. Further, in case of aluminium enclosures, the surface shall be

coated with powder (coating thickness of 60 microns) after surface preparation for painting.

13.0 HANDLING, STORING AND INSTALLATION

- 13.1 In accordance with the specific installation instructions as shown on manufacturer's drawings or as directed by the Purchaser or his representative, the Contractor shall unload, store, erect, install, wire, test and place into commercial use all the equipment included in the contract. Equipment shall be installed in a neat, workmanlike manner so that it is level, plumb, and square and properly aligned and oriented. Commercial use of switchyard equipment means completion of all site tests specified and energization at rated voltage.
- 13.2 Contractor may engage manufacturer's Engineers to supervise the unloading, transportation to site, storing, testing and commissioning of the various equipment being procured by them separately. Contractor shall unload, transport, store, erect, test and commission the equipment as per instructions of the manufacturer's supervisory Engineer(s) and shall extend full cooperation to them.
- 13.3 The contractor shall have to ensure that the hard and flat indoor and outdoor storage areas are in place prior to commencement of delivery of material at site. Contractor shall also ensure availability of proper unloading and material handling equipment like cranes etc. and polyester/nylon ropes of suitable capacity to avoid damage during unloading and handling of material at site. All indoor equipments shall be stored indoors. Outdoor equipment may be stored outdoors but on a hard and flat raised area properly covered with waterproof and dustproof covers to protect them from water seepage and moisture ingress. However, all associated control panels, marshalling boxes operating boxes etc. of outdoor equipments are to be stored indoors only. Storage of equipment on top of another one is not permitted if the wooden packing is used. Material opened for joint inspection shall be repacked properly as per manufacturer's recommendations. During storage of material regular periodic monitoring of important parameters like oil level / leakage, SF6 / Nitrogen pressure etc. shall be ensured by the contractor.
- 13.4 In case of any doubt/misunderstanding as to the correct interpretation of manufacturer's drawings or instructions, necessary clarifications shall be obtained from the Purchaser. Contractor shall be held responsible for any damage to the equipment consequent to not following manufacturer's drawings/instructions correctly.
- 13.5 Where assemblies are supplied in more than one section, Contractor shall make all necessary mechanical and electrical connections

between sections including the connection between buses. Contractor shall also do necessary adjustments/alignments necessary for proper operation of circuit breakers, isolators and their operating mechanisms. All components shall be protected against damage during unloading, transportation, storage, installation, testing and commissioning. Any equipment damaged due to negligence or carelessness or otherwise shall be replaced by the Contractor at his own expense.

- 13.6 Supplier shall be responsible for examining all the shipment and notify the Purchaser immediately of any damage, shortage, discrepancy etc. for the purpose of Purchaser's information only. The Contractor shall submit to the Purchaser every week a report detailing all the receipts during the weeks. However, the Contractor shall be solely responsible for any shortages or damages in transit, handling and/or in storage and erection of the equipment at Site Any demurrage, wharfage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor.
- 13.7 The supplier shall be fully responsible for the equipment/material until the same is handed over to the Purchaser in an operating condition after commissioning. Contractor shall be responsible for the maintenance of the equipment/ material while in storage as well as after erection until taken over by Purchaser, as well as protection of the same against theft, element of nature, corrosion, damages etc.
- 13.8 Where material/ equipment is unloaded by Purchaser before the Contractor arrives at site or even when he is at site, Purchaser by right can hand over the same to Contractor and there upon it will be the responsibility of Contractor to store the material in an orderly and proper manner.
- 13.9 The Contractor shall be responsible for making suitable indoor storage facilities, to store all equipment which requires indoor storage.
- 13.10 The words 'erection' and 'installation' used in the specification are synonymous.
- 13.11 Exposed live parts shall be placed high enough above ground to meet the requirements of electrical and other statutory safety codes.
- 13.12 Equipment Bases
- A cast iron or welded steel base plate shall be provided for all rotating equipment which is to be installed on a concrete base unless otherwise agreed to by the Purchaser. Each base plate shall support the unit and its drive assembly, shall be of a neat design with pads for

anchoring the units, shall have a raised lip all around, and shall have threaded drain connections.

14.0 TOOLS

14.1 Tools and Plants (T&P)

The Contractor shall arrange all T&P (such as necessary supports, cranes, ladders, platforms etc.) for erection, testing & commissioning of the system at his own cost. Further, all consumables, wastage and damages shall be to the account of contractor.

14.2 Special Tools and tackles

The bidder shall include in his proposal the deployment of all special tools and tackles required for Operation and maintenance of equipment. The special tools and tackles shall only cover items which are specifically required for the equipment offered and are proprietary in nature. However a list of all such devices should be indicated in the relevant schedule provided in the Bid Price Schedule. In addition to this, the Contractor shall also furnish a list of special tools and tackles for the various equipment in a manner to be referred by the Employer during the operation of these equipment. The scope of special tools and tackles are to be decided during detail engineering and the list of special tools and tackles, if any shall be finalized.

15.0 AUXILIARY SUPPLY

15.1 The sub-station auxiliary supply is normally met through a system indicated under section "Electrical & Mechanical Auxiliaries" having the following parameters. The auxiliary power for station supply, including the equipment drive, cooling system of any equipment, air-conditioning, lighting etc shall be designed for the specified Parameters as under. The DC supply for the instrumentation and PLCC system shall also conform the parameters as indicated in the following.

Normal Voltage	Variation in Voltage	Frequen cy in	Phase/ W	Neutral connecti
415V	$\pm 10\%$	$50 \pm 5\%$	3/4 Wire	Solidly
240V	$\pm 10\%$	$50 \pm 5\%$	1/2 Wire	Solidly
220V	190V to 240V	DC	-	Isolated 2 wire System
48V	—	DC	—	2 wire system (+) earthed

Combined variation of voltage and frequency shall be limited to $\pm 10\%$.

16.0 SUPPORT STRUCTURE (If in the scope of supplier)

16.1 The equipment support structures shall be suitable for equipment connections at the first level i.e 14.0 meter, 8.0 meter and 5.9 meter from plinth level for 765 kV, 420 kV and 245 kV substations respectively. All equipment support structures shall be supplied alongwith brackets, angles, stools etc. for attaching the operating mechanism, control cabinets & marshalling box (wherever applicable) etc.

16.2 Support structure shall meet the following mandatory requirements:

16.2.1 The minimum vertical distance from the bottom of the lowest porcelain part of the bushing, porcelain enclosures or supporting insulators to the bottom of the equipment base, where it rests on the foundation pad shall be 2.55meters.

17.0 CLAMPS AND CONNECTORS INCLUDING TERMINAL CONNECTORS

17.1 All power clamps and connectors shall conform to IS: 5561 & NEMA CC1 and shall be made of materials listed below:

- | | | |
|----|--|---|
| a) | For connecting ACSR conductors | Aluminum alloy casting, conforming to designation of IS:617 and all test shall conform to IS:617 |
| b) | For connecting equipment terminals made of copper with ACSR conductors | Bimetallic connectors made from aluminum alloy conforming to designation of IS:617 with 2mm thick bimetallic liner and all test shall conform to IS:617 |
| c) | For connecting G.I | Galvanised mild steel shield |
| d) | i) Bolts, nuts & Plain, washers | i) Electrogalvanised for sizes below M12, for others hot dip galvanised. |
| | ii) Spring washers for items 'a' to 'c' | ii) Electro-galvanised mild steel suitable for atleast service condition-3 as per IS: 1573 |

17.2 Necessary clamps and connectors shall be supplied for all equipment and connections. The requirement regarding external corona and RIV as specified for any equipment shall include its terminal fittings. If corona rings are required to meet these requirements they shall be considered as part of that equipment and included in the scope of work.

17.3 Where copper to aluminum connections are required, bi-metallic clamps shall be used, which shall be properly designed to ensure that any deterioration of the connection is kept to a minimum and restricted to parts which are not current carrying or subjected to stress.

17.4 Low voltage connectors, grounding connectors and accessories for grounding equipment as specified in any particular case, are also included in the scope of Work.

17.5 No current carrying part of any clamp shall be less than 10 mm thick. All ferrous parts shall be hot dip galvanised. Copper alloy liner of minimum 2 mm thickness shall be cast integral with aluminum body or 2 mm thick bi-metallic strips shall be provided for Bi-metallic clamps.

17.6 All casting shall be free from blow holes, surface blisters, cracks and cavities. All sharp edges and corners shall be blurred and rounded off.

17.7 Flexible connectors, braids or laminated straps made for the terminal clamps for bus posts shall be suitable for both expansion or through (fixed/sliding) type connection of 4" IPS AL. tube as required. In both the cases the clamp height (top of the mounting pad to centre line of the tube) should be same.

17.8 Clamp shall be designed to carry the same current as the conductor and the temperature rise shall be equal or less than that of the conductor at the specified ambient temperature. The rated current for which the clamp/connector is designed with respect to the specified reference ambient temperature, shall also be indelibly marked on each component of the clamp/connector, except on the hardware.

17.9 All current carrying parts shall be designed and manufactured to have minimum contact resistance.

17.10 Clamps and connectors shall be designed to be corona controlled.

17.11 Tests

17.11.1 Clamps and connectors should be type tested as per IS:5561 and shall also be subjected to routine tests as per IS:5561. Following type test reports shall be submitted for approval as per clause 9.2 above except for sl. no. (ii) & (iii) for which type test once conducted shall be applicable (i.e. The requirement of test conducted within last ten years shall not be applicable).

- i) Temperature rise test (maximum temperature rise allowed is 35°C over 50°C ambient)
- ii) Short time current test
- iii) Corona (dry) and RIV (dry) test (for 220 KV and above voltage level clamps)
- iv) Resistance test and tensile test

18.0 CONTROL CABINETS, JUNCTION BOXES, TERMINAL BOXES & MARSHALLING BOXES FOR OUTDOOR EQUIPMENT

- 18.1 All types of boxes, cabinets etc. shall generally conform to & be tested in accordance with IS-5039/IS-8623, IEC-60439, as applicable, and the clauses given below:
- 18.2 Control cabinets, junction boxes, Marshalling boxes & terminal boxes shall be made of sheet steel or aluminum enclosure and shall be dust, water and vermin proof. Sheet steel used shall be atleast 2.0 mm thick cold rolled or 2.5 mm hot rolled or alternately 1.6 mm thick stainless steel can also be used. The box shall be properly braced to prevent wobbling. There shall be sufficient reinforcement to provide level surfaces, resistance to vibrations and rigidity during transportation and installation. In case of aluminum enclosed box the thickness of aluminum shall be such that it provides adequate rigidity and long life as comparable with sheet steel of specified thickness.
- 18.3 A canopy and sealing arrangements for operating rods shall be provided inmarshalling boxes / Control cabinets to prevent ingress of rain water.
- 18.4 Cabinet/boxes shall be provided with double hinged doors with padlocking arrangements. The distance between two hinges shall be adequate to ensure uniform sealing pressure against atmosphere. The quality of the gasket shall be such that it does not get damaged/cracked during the operation of the equipment.
- 18.5 All doors, removable covers and plates shall be gasketed all around with suitably profiled EPDM/Neoprene gaskets. The gasket shall be tested in accordance with approved quality plan, IS: 11149 and IS: 3400. Ventilating Louvers, if provided, shall have screen and filters. The screen shall be fine wire mesh made of brass.
- 18.6 All boxes/cabinets shall be designed for the entry of cables from bottom by mean of weather proof and dust-proof connections. Boxes and cabinets shall be designed with generous clearances to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the box or cabinet. Suitable cable gland plate above the base of the marshalling kiosk/box shall be provided for this purpose along with the proper blanking plates. Necessary number of cable glands shall be supplied and fitted on this gland plate. Gland plate shall have provision for some future glands to be provided later, if required. The Nickel plated glands shall be dust proof, screw on & double compression type and made of brass. The gland shall have provision for securing armour of the cable separately and shall be provided with earthing tag. The glands shall conform to BS:

6121.

- 18.7 A 240V, single phase, 50 Hz, 15 amp AC plug and socket shall be provided in the cabinet with ON-OFF switch for connection of hand lamps. Plug and socket shall be of industrial grade.
- 18.8 For illumination, a fluorescent tube or CFL of approximately 9 to 15 watts shall be provided. The switching of the fittings shall be controlled by the door switch. .
For junction boxes of smaller sizes such as lighting junction box, manual operated earth switch mechanism box etc., plug socket, heater and illumination is not required to be provided.
- 18.9 All control switches shall be of MCB/rotary switch type and Toggle/piano switches shall not be accepted.
- 18.10 Positive earthing of the cabinet shall be ensured by providing two separate earthing pads. The earth wire shall be terminated on to the earthing pad and secured by the use of self etching washer. Earthing of hinged door shall be done by using a separate earth wire.
- 18.11 The bay marshalling kiosks shall be provided with danger plate and a diagram showing the numbering/connection/feruling by pasting the same on the inside of the door.
- 18.12 a) The following routine tests alongwith the routine tests as per IS:5039 shall also be conducted:
i) Check for wiring
ii) Visual and dimension check
b) The enclosure of bay marshalling kiosk, junction box, terminal box shall conform to IP-55 as per IS:13947 including application of, 2.5 KV rms for 1 (one) minute, insulation resistance and functional test after IP-55 test.

19.0 DELETED

20.0 TERMINAL BLOCKS AND WIRING

- 20.1 Control and instrument leads from the switchboards or from other equipment will be brought to terminal boxes or control cabinets in conduits. All inter-phase and external connections to equipment or to control cubicles will be made through terminal blocks.
- 20.2 Terminal blocks shall be 650V grade and have continuous rating to carry the maximum expected current on the terminals and non breakable type. These shall be of moulded piece, complete with insulated barriers, stud type terminals, washers, nuts and lock nuts. Screw clamp, overall insulated, insertion type, rail mounted terminals can be

used in place of stud type terminals. But preferably the terminal blocks shall be non-disconnecting stud type of Elmex or Phoenix or Wago or equivalent make.

- 20.3 Terminal blocks for current transformer and voltage transformer secondary leads shall be provided with test links and isolating facilities. The current transformer secondary leads shall also be provided with short circuiting and earthing facilities.
- 20.4 The terminal shall be such that maximum contact area is achieved when a cable is terminated. The terminal shall have a locking characteristic to prevent cable from escaping from the terminal clamp unless it is done intentionally.
- 20.5 The conducting part in contact with cable shall preferably be tinned or silver plated however Nickel plated copper or zinc plated steel shall also be acceptable.
- 20.6 The terminal blocks shall be of extensible design.
- 20.7 The terminal blocks shall have locking arrangement to prevent its escape from the mounting rails.
- 20.8 The terminal blocks shall be fully enclosed with removable covers of transparent, non-deteriorating type plastic material. Insulating barriers shall be provided between the terminal blocks. These barriers shall not hinder the operator from carrying out the wiring without removing the barriers.
- 20.9 Unless otherwise specified terminal blocks shall be suitable for connecting the following conductors on each side.
- | | | |
|----|------------------------------------|---|
| a) | All circuits except CT/PT circuits | Minimum of 2 nos. of 2.5 sq mm copper flexible. |
| b) | All CT/PT circuits | Minimum of 4 nos. of 2.5 sq mm copper flexible. |
- 20.10 The arrangements shall be in such a manner so that it is possible to safely connect or disconnect terminals on live circuits and replace fuse links when the cabinet is live.
- 20.11 At least 20 % spare terminals shall be provided on each panel/cubicle/box and these spare terminals shall be uniformly distributed on all terminals rows.
- 20.12 There shall be a minimum clearance of 250 mm between the First/bottom row of terminal block and the associated cable gland plate for outdoor ground mounted marshalling box and the clearance between

two rows of terminal blocks shall be a minimum of 150 mm.

- 20.13 The supplier shall furnish all wire, conduits and terminals for the necessary interphase electrical connections (where applicable) as well as between phases and common terminal boxes or control cabinets. For equipments rated for 400 kV and above the wiring required in these items shall be run in metallic ducts or shielded cables in order to avoid surge overvoltages either transferred through the equipment or due to transients induced from the EHV circuits.
- 20.14 All input and output terminals of each control cubicle shall be tested for surge withstand capability in accordance with the relevant IEC Publications, in both longitudinal and transverse modes. The Contractor shall also provide all necessary filtering, surge protection, interface relays and any other measures necessary to achieve an impulse withstand level at the cable interfaces of the equipment.
- 21.0 LAMPS & SOCKETS**
- 21.1 Sockets**
- All sockets (convenience outlets) shall be suitable to accept both 5 Amp & 15 Amp pin round Standard Indian plugs. They shall be switched sockets with shutters.
- 21.2 Hand Lamp:**
- A 240 Volts, single Phase, 50 Hz AC plug point shall be provided in the interior of each cubicle with ON-OFF Switch for connection of hand lamps.
- 21.3 Switches and Fuses:**
- 21.3.1 Each panel shall be provided with necessary arrangements for receiving, distributing, isolating and fusing of DC and AC supplies for various control, signalling, lighting and space heater circuits. The incoming and sub-circuits shall be separately provided with miniature circuit breaker / switchfuse units. Selection of the main and Sub-circuit fuse ratings shall be such as to ensure selective clearance of sub-circuit faults. Potential circuits for relaying and metering shall be protected by HRC fuses.
- 21.3.2 All fuses shall be of HRC cartridge type conforming to IS: 9228 mounted on plug-in type fuse bases. Miniature circuit breakers with thermal protection and alarm contacts will also be accepted. All accessible live connection to fuse bases shall be adequately shrouded. Fuses shall have operation indicators for indicating blown fuse condition. Fuse carrier base shall have imprints of the fuse rating and voltage.

22.0 BUSHINGS, HOLLOW COLUMN INSULATORS AND SUPPORT INSULATORS:

22.1 Bushings shall be manufactured and tested in accordance with IS:2099 & IEC- 60137 while hollow column insulators shall be manufactured and tested in accordance with IEC-62155/IS:5621. The support insulators shall be manufactured and tested as per IS:2544/IEC-60168 and IEC-60273. The insulators shall also conform to IEC-60815 as applicable. The bidder may also offer composite hollow insulators, conforming to IEC-61462.

22.2 Support insulators, bushings and hollow column insulators shall be manufactured from high quality porcelain. Porcelain used shall be homogeneous, free from laminations, cavities and other flaws or imperfections that might affect the mechanical or dielectric quality and shall be thoroughly vitrified tough and impervious to moisture.

22.3 Glazing of the porcelain shall be uniform brown in colour, free from blisters, burrs and similar other defects.

22.4 Support insulators/bushings/hollow column insulators shall be designed to have ample insulation, mechanical strength and rigidity for the conditions under which they will be used.

22.5 When operating at normal rated voltage there shall be no electric discharge between the conductors and bushing which would cause corrosion or injury to conductors, insulators or supports by the formation of substances produced by chemical action. No radio interference shall be caused by the insulators/bushings when operating at the normal rated voltage.

22.6 Bushing porcelain shall be robust and capable of withstanding the internal pressures likely to occur in service. The design and location of clamps and the shape and the strength of the porcelain flange securing the bushing to the tank shall be such that there is no risk of fracture. All portions of the assembled porcelain enclosures and supports other than gaskets, which may in any way be exposed to the atmosphere shall be composed of completely non hygroscopic material such as metal or glazed porcelain

22.7 All iron parts shall be hot dip galvanised and all joints shall be air tight. Surface of joints shall be trued up porcelain parts by grinding and metal parts by machining. Insulator/bushing design shall be such as to ensure a uniform compressive pressure on the joints.

22.8 Tests

In bushing, hollow column insulators and support insulators shall conform

to type tests and shall be subjected to routine tests in accordance with IS: 2099 & IS:2544 & IS : 5621.

23.0 MOTORS

Motors shall be "Squirrel Cage" three phase induction motors of sufficient size capable of satisfactory operation for the application and duty as required for the driven equipment and shall be subjected to routine tests as per applicable standards. The motors shall be of approved make.

23.1 Enclosures

- a) Motors to be installed outdoor without enclosure shall have hose proof enclosure equivalent to IP-55 as per IS: 4691. For motors to be installed indoor i.e. inside a box, the motor enclosure, shall be dust proof equivalent to IP-44 as per IS: 4691.
- b) Two independent earthing points shall be provided on opposite sides of the motor for bolted connection of earthing conductor.
- c) Motors shall have drain plugs so located that they will drain water resulting from condensation or other causes from all pockets in the motor casing.
- d) Motors weighing more than 25 Kg. shall be provided with eyebolts, lugs or other means to facilitate lifting.

23.2 Operational Features

- a) Continuous motor rating (name plate rating) shall be at least ten (10) percent above the maximum load demand of the driven equipment at design duty point and the motor shall not be overloaded at any operating point of driven equipment that will rise in service.
- b) Motor shall be capable at giving rated output without reduction in the expected life span when operated continuously in the system having the particulars as given in Clause 15.0 of this Section.

23.3 Starting Requirements:

- a) All induction motors shall be suitable for full voltage direct-on-line starting. These shall be capable of starting and accelerating to the rated speed alongwith the driven equipment without exceeding the acceptable winding temperature even when the supply voltage drops down to 80% of the rated voltage.

- b) Motors shall be capable of withstanding the electrodynamic stresses and heating imposed if it is started at a voltage of 110% of the rated value.
- c) The locked rotor current shall not exceed six (6) times the rated full load current for all motors, subject to tolerance as given in IS:325.
- d) Motors when started with the driven equipment imposing full starting torque under the supply voltage conditions specified under Clause 15.0 shall be capable of withstanding atleast two successive starts from cold condition at room temperature and one start from hot condition without injurious heating of winding. The motors shall also be suitable for three equally spread starts per hour under the above referred supply condition.
- e) The locked rotor withstand time under hot condition at 110% of rated voltage shall be more than starting time with the driven equipment of minimum permissible voltage by at least two seconds or 15% of the accelerating time whichever is greater. In case it is not possible to meet the above requirement, the Bidder shall offer centrifugal type speed switch mounted on the motor shaft which shall remain closed for speed lower than 20% and open for speeds above 20% of the rated speed. The speed switch shall be capable of withstanding 120% of the rated speed in either direction of rotation.

23.4 Running Requirements:

- a) The maximum permissible temperature rise over the ambient temperature of 50 degree C shall be within the limits specified in IS:325 (for 3 - phase induction motors) after adjustment due to increased ambient temperature specified.
- b) The double amplitude of motor vibration shall be within the limits specified in IS: 4729. Vibration shall also be within the limits specified by the relevant standard for the driven equipment when measured at the motor bearings.
- c) All the induction motors shall be capable of running at 80% of rated voltage for a period of 5 minutes with rated load commencing from hot condition.

23.5 Testing and Commissioning

An indicative list of tests is given below. Contractor shall perform any additional test based on specialities of the items as per the field Q.P./Instructions of the equipment Contractor or Purchaser without any extra cost to the Purchaser. The Contractor shall arrange all

Project: 400/220kV Tumkur(Pavagada), 400kV Mysore & 400/220kV Tumkur (Vasanthnarsapur)
Substation Pkg

Customer: Power Grid Corporation of India

Technical Specification for Visual Monitoring System

Doc No. TB-393-316-011

Section-3: Project Details & General Specification

Rev. No. 00

instruments required for conducting these tests alongwith calibration certificates and shall furnish the list of instruments to the Purchaser for approval.

- (a) Insulation resistance
- (b) Phase sequence and proper direction of rotation.
- (c) Any motor operating incorrectly shall be checked to determine the cause and the conditions corrected.

ANNEXURE-A

CORONA AND RADIO INTERFERENCE VOLTAGE (RIV) TEST

1. General

Unless otherwise stipulated, all equipment together with its associated connectors, where applicable, shall be tested for external corona (for 400kV & above) both by observing the voltage level for the extinction of visible corona under falling power frequency voltage and by measurement of radio interference voltage (RIV) for 132kV and above.

2. Test Levels:

The test voltage levels for measurement of external RIV and for corona extinction voltage are listed under the relevant clauses of the specification.

3. Test Methods for RIV:

- 3.1 RIV tests shall be made according to measuring circuit as per International Special-Committee on Radio Interference (CISPR) Publication 16-1(1993) Part -1. The measuring circuit shall preferably be tuned to frequency with 10% of 0.5 Mhz but other frequencies in the range of 0.5 MHz to 2 MHz may be used, the measuring frequency being recorded. The results shall be in microvolts.
- 3.2 Alternatively, RIV tests shall be in accordance with NEMA standard Publication No. 107-1964, except otherwise noted herein.
- 3.3 In measurement of, RIV, temporary additional external corona shielding may be provided. In measurements of RIV only standard fittings of identical type supplied with the equipment and a simulation of the connections as used in the actual installation will be permitted in the vicinity within 3.5 meters of terminals.
- 3.4 Ambient noise shall be measured before and after each series of tests to ensure that there is no variation in ambient noise level. If variation is present, the lowest ambient noise level will form basis for the measurements. RIV levels shall be measured at increasing and decreasing voltages of 85%, 100%, and 110% of the specified RIV test voltage for all equipment unless otherwise specified. The specified RIV test voltage for 765kV, 400 kV, 220 KV is listed in the detailed specification together with maximum permissible RIV level in microvolts.
- 3.5 The metering instruments shall be as per CISPR recommendation or equivalent device so long as it has been used by other testing authorities.

- 3.6 The RIV measurement may be made with a noise meter. A calibration procedure of the frequency to which noise meter shall be tuned shall establish the ratio of voltage at the high voltage terminal to voltage read by noise meter.

4. Test Methods for Visible Corona

The purpose of this test is to determine the corona extinction voltage of apparatus, connectors etc. The test shall be carried out in the same manner as RIV test described above with the exception that RIV measurements are not required during test and a search technique shall be used near the onset and extinction voltage, when the test voltage is raised and lowered to determine their precise values. The test voltage shall be raised to 110% of specified corona extinction voltage and maintained there for five minutes. In case corona inception does not take place at 110%, test shall be stopped, otherwise test shall be continued and the voltage will then be decreased slowly until all visible corona disappears. The procedure shall be repeated at least 4 times with corona inception and extinction voltage recorded each time. The corona extinction voltage for purposes of determining compliance with the specification shall be the lowest of the four values at which visible corona (negative or positive polarity) disappears. Photographs with laboratory in complete darkness shall be taken under test conditions, at all voltage steps i.e. 85%, 100%, and 110%. Additional photographs shall be taken at corona inception and extinction voltages. At least two views shall be photographed in each case using Panchromatic film with an ASA daylight rating of 400 with an exposure of two minutes at a lens aperture of f/5.6 or equivalent. The photographic process shall be such that prints are available for inspection and comparison with conditions as determined from direct observation. Photographs shall be taken from above and below the level of connector so as to show corona on bushing, insulators and all parts of energised connectors. The photographs shall be framed such that test object essentially, fills the frame with no cut-off.

For recording purpose, modern devices utilizing UV recording methods such as image intensifier may also be used.

- 4.1 The test shall be recorded on each photograph. Additional photograph shall be taken from each camera position with lights on to show the relative position of test object to facilitate precise corona location from the photographic evidence.
- 4.2 In addition to photographs of the test object preferably four photographs

shall be taken of the complete test assembly showing relative positions of all the test equipment and test objects. These four photographs shall be taken from four points equally spaced around the test arrangement to show its features from all sides. Drawings of the laboratory and test set up locations shall be provided to indicate camera positions and angles. The precise location of camera shall be approved by Purchaser's inspector, after determining the best camera locations by trial energisation of test object at a voltage which results in corona.

- 4.3 The test to determine the visible corona extinction voltage need not be carried out simultaneously with test to determine RIV levels.
- 4.4 However, both test shall be carried out with the same test set up and as little time duration between tests as possible. No modification on treatment of the sample between tests will be allowed. Simultaneous RIV and visible corona extinction voltage testing may be permitted at the discretion of Purchaser's inspector if, in his opinion, it will not prejudice other test.

5. Test Records:

In addition to the information previously mentioned and the requirements specified as per CISPR or NEMA 107-1964 the following data shall be included in test report:

- a) Background noise before and after test.
- b) Detailed procedure of application of test voltage.
- c) Measurements of RIV levels expressed in micro volts at each level.
- d) Results and observations with regard to location and type of interference sources detected at each step.
- e) Test voltage shall be recorded when measured RIV passes through 100microvolts in each direction.
- f) Onset and extinction of visual corona for each of the four tests required shall be recorded.

Project: 400/220kV Tumkur(Pavagada), 400kV Mysore & 400/220kV Tumkur (Vasanthnarsapur)
Substation Pkg

Customer: Power Grid Corporation of India

Technical Specification for Visual Monitoring System

Doc No. TB-393-316-011

Section-3: Project Details & General Specification

Rev. No. 00

ANNEXURE-B

SEISMIC WITHSTAND TEST PROCEDURE

The seismic withstanding test on the complete equipment (for 132kV and above) shall be carried out along with supporting structure.

The Bidder shall arrange to transport the structure from his Contractor's premises/POWERGRID sites for the purpose of seismic withstand test only.

The seismic level specified shall be applied at the base of the structure. The accelerometers shall be provided at the Terminal Pad of the equipment and any other point as agreed by the Purchaser. The seismic test shall be carried out in all possible combinations of the equipment. The seismic test procedure shall be furnished for approval of the Purchaser.

Project: 400/220kV Tumkur(Pavagada), 400kV Mysore & 400/220kV Tumkur (Vasantnarsapur)
Substation Pkg

Customer: Power Grid Corporation of India

Technical Specification for Visual Monitoring System

Doc No. TB-393-316-011

Section-3: Project Details & General Specification

Rev. No. 00

ANNEXURE-C

LIST OF THE MAKES FOR WHICH TYPE TEST REPORTS NOT REQUIRED TO BE SUBMITTED

SL. NO.	ITEM DESCRIPTION	MAKE
1.	Outdoor receptacles	CGL/ B&C / BCH / Sakti, Chennai /Indo Asian
2.	Trefoil clamp	Moulded Fibre Glass Products, Calcutta
3.	Diesel Engine	Cummins / Ruston & Hornsby
4.	Alternator	AVK / KIRLOSKAR / STAMFORD
5.	Motors	KEC / Siemens/ NGEF/Crompton/ABB
6.	Cable Glands	Sunil & Co. / Arup/ Comet / QPIE
7.	Junction Box	Sarvana / ECS / C&S /Vikas/ Maktel/Unilac/Jasper/ Amara raja
8.	Lighting Fixtures	Phillips/CGL/Bajaj
9.	ACSR Conductor (Bersimis/ Moose/ Zebra)	Sterlite/Apar/HVPL/ Sharavathy/Hiren Aluminium Ltd./Smita/Deepak Cables/Polycab wires/Cabcon
11.	AAC Conductor (BULL)	Sterlite/Cabcon
12.	G.S. Earth Wire	Sharavathy/Bharat Wire Ropes/Ramswarup

Note: For a new make other than above/POWERGRID approved list of sub vendor, type test reports as per relevant standard shall be submitted for Purchaser's approval.

SECTION - 4
SCHEDULE OF TECHNICAL DEVIATIONS

Bidder shall list below all technical deviation clause wise w.r.t. tender specifications:

<u>S.No.</u>	<u>Page No.</u>	<u>Clause No.</u>	<u>Deviation</u>	<u>Reason / Justification</u>
--------------	-----------------	-------------------	------------------	-------------------------------

Any deviation not specifically brought out in this section shall not be admissible for any commercial implication at later stage. Except to the technical deviations listed in this schedule, bidder's offer shall be considered in full compliance to the tender specifications irrespective of any such deviation indicated / taken elsewhere in the submitted offer.

Date:

Tenderer's Stamp & Signature