

Each of the corresponding communication controllers shall also have same spare capacity as that of controller.

For controller, the worst loading condition shall include the following tasks:

- (a) All process inputs scanning and processing is in progress and all the data is transmitted over the main data bus every one (1) second.
- (b) All closed loop controls in operation
- (c) All open loop controls in operation
- (d) All output devices are in operation with rated performance/speed.
- (e) Control/information request is initiated on all control Operating stations.
- (f) In burst mode operation (in case of major equipment trip), 100 digital alarms are generated per second for a period of 10 seconds.

4.02.08.02 Redundancy in Input/output Modules

Hot standby 100% redundancy shall be provided for all input/output cards where inputs/outputs are used for CLCS and OLCS. All input/output of SCADA from/ to breaker & isolators shall be redundant. No redundancy at I/O card level is required which are executing purely data acquisition/monitoring functions. I/O card shall have 16 channels per AI/RTD/TC/AO card and 32 channels for DI/DO card. No. of channels per I/O card indicated are maximum, which may also further reduced to meet the I/O cards features specified elsewhere in specification.

Wherever redundant I/O modules/cards are used as per specification requirement, both (1:1 redundant) input or output modules shall execute the designated functions parallelly. The offered system shall have facility to enable final output from any of redundant input/output module, in case both modules are healthy. In case one of redundant card/module is unhealthy, the system shall detect the same and the output to and from system shall be given from the healthier card. I/O card redundancy shall not be achieved through relays, diodes or any other additional hardware or software, Engineered solution for redundancy in I/O cards are not acceptable.

Wherever redundant sensors are employed each sensor shall be wired to both input modules of redundant modules so that even if one input module fails, the both signals will be available from the other input module. This arrangement is necessary to avoid loss of both input signals due to failure of one input module where both the signals are connected.

In addition to above, 20 % fully wired input/output spare channels should be provided for each I/O modules.

Bidder to note that all type of hardwares & electronic modules like controllers, I/O cards, communication modules and interface modules etc used in DDCMIS/DCS/PLC shall be sourced/supplied from their Principal's works.

4.02.08.02.1 Wiring Scheme for inputs/outputs to/from control system shall be as follows:

- i. Each of the triple redundant binary & analog inputs shall be wired to separate input modules. In addition, for functions employing 2V3 controllers (eg. Turbine protection, MFT, Boiler protection, DEHGC etc.), each of the triple redundant binary & analog signals shall be wired to separate input modules associated with each controller, so that even if one input module fails, the signal will be available from the other input module.

In case of dual redundant binary & analog inputs, each of the signal shall be wired to both input modules of redundant modules, so that even if one input module fails, the both signals will be available from the other input module. These redundant modules shall be placed in different racks, which will have separately fused power supply distribution. Implementation of multiple measurement schemes of these inputs will be performed in the redundant hardware. Loss of one input module shall not affect the signal to other modules. Other channels of these modules can be used by other inputs of the same functional group.

- ii. The single (i.e. non-redundant) binary & analog signal required for control purposes shall be wired as follows:

All single analog & binary inputs (used for OLCS & CLCS) including the limit switches of valves/dampers MCC/SWGR check-backs of all drives, SOE & information related signals shall be wired to redundant input modules.

The binary and analog outputs from one subsystem of the Control System to other which are required in these systems for control & protection purposes, shall be made available from triple/dual redundant binary and analog output modules. Other binary & analog outputs used for DAS shall be non-redundant only. Failure of any single module shall not affect operation of more than one single drive.

4.02.09 DDCMIS/DCS Controller Grouping/Partitioning

All controllers shall be dual redundant except Triple modular redundant controllers for Turbine DEHC, Turbine protection & Boiler MFT/protection. Following tentative segregation for controls (OLCS, CLCS) & DAS is proposed, however final segregation shall be subject to Owner's approval during detailed engineering:-

- a) Coordinated master controls, FTP, Oil System, Misc. Drives, Burner Tilt
- b) IDF A, FDF A, Air flow and excess air correction, PA fan –A/AH – A/SCAPH-A/PA header Pr. Control.
- c) IDF B, FDF B, Furnace draft, PA fan –B/AH – B/SCAPH-B
- d) Mill related controls such as air flow/feeder rate/outlet temperature, Mill Lubrication oil controls; Two mills per redundant processor
 - i. AB
 - ii. CD
 - iii. EF
 - iv. GH
 - v. JK
 - vi. MN
- e) Feed water/BFP Scoop control/CBD

- f) TDBFP - A integral controls per redundant processor
 - i. ATRS 1 SGC & Turbine Protection
 - ii. ATRS 2 SGC, TSI & CLCS
 - iii. DEHC (Digital Electro Hydraulic Governing System)
- g) TDBFP - B integral controls per redundant processor
 - i. ATRS 1 SGC & Turbine Protection
 - ii. ATRS 2 SGC, TSI & CLCS
 - iii. DEHC (Digital Electro Hydraulic Governing System)
- h) MDBFP – C & Aux and Boiler fill up Pumps
- i) Deaerator (three element controls), CEP, hot well, & Hot well makeup Pumps.
- j) HP heaters 5, 6, 7 & 8.
- k) LP Heaters 1, 2, & 3.
- l) SH steam temperature control (multi variable control) & RH steam temperature control (multi variable control), Metal Temp.
- m) DMCW Pumps & DMCW system for SG & TG and CPU* (* CPU incase DDCMIS controlled) .
- n) COLTCS, HP & LP Dosing System and Cooling Tower & Aux.
- o) Electrical system 1
- p) Electrical system 2
- q) Electrical system 3
- r) **Remote I/O panel** with r edundant pr ocessor f rom D DCMIS f amily is to be implemented with following grouping for CW & ACW system
 - i. CW Pump – A, CW Pump – C, ACW Pump A & CW lines to/from unit # 1 Condenser/Hotwell.
 - ii. CW Pump – B, ACW Pump B, CW makeup system & CW lines to/from unit # 2 Condenser/Hotwell.
- s) Turbine integral controls per redundant processor
 - i. ATRS SGC Oil Supply, Turbine & Drains
 - ii. ATRS SGC Condensate & Evacuation System
 - iii. GSPC (Gland Steam Pressure Control), LP Bypass
 - iv. GAMP (Generator Aux. Monitoring)
 - v. TSC (Turbine Stress Evaluation Control System) & TSI
 - vi. ATT (Automatic Turbine Tester)
- t) SG integral controls per redundant processor
 - i. Oil A B & Oil CD
 - ii. Oil E F & Oil G H
 - iii. Oil J K & Oil M N
 - iv. Coal A B
 - v. Coal C D
 - vi. Coal E F
 - vii. Coal GH
 - viii. Coal JK
 - ix. Coal MN

- x. SADC & APRDS
- xi. SBC controls, SBC PR & Drain Temp. controls.
- xii. HPBP
- u) Steam Turbine controls like DEHGC (TMR – Triple modular Redundant philosophy) and Turbine Protection (TMR – Triple modular redundant philosophy) with fail safe design cards can be Integral or separate stand-alone.
- v) Triple Modular Redundant (TMR) processors for MFT & Boiler protection with fail safe design cards can be Integral or separate stand-alone.

All controllers at “sr. no. a to t shall be dual redundant (92 Nos. total)” and at “sr. no. u to v shall be triple redundant (9 Nos)” for each unit. Hence, altogether minimum 101 processors are envisaged for each unit. During detailed engineering, processor task allocation will be done amongst these processors (and shall be subject to owner’s approval) taking into consideration the turbine control, boiler control and the station C&I portion altogether. In addition, loading of signal interfacing from other BOP packages, Aux. & control/monitoring system shall be considered for finalization of quantity of controllers.

For common system between two units, following redundant controller grouping shall be provided with unit 1 DDCMIS, which shall also be interfaced with unit - 2 DDCMIS for control & operation. **Remote I/O panel** with processor from DDCMIS family is to be implemented because of the long distance. Controllers shall be 1 no. dual redundant (2 Nos. total).

- i) BTG (FOPH) Fuel Oil System

Above quantity of controllers is minimum, indicative and tentative only. However final quantities of processors in addition to above quantities shall be finalized depending upon I/O handling capacity of the processor and design parameters like response time, communication bus speeds etc. Overcrowding of control loops in controllers shall be avoided.

Each group has sufficient spare capacity of at least 25% to meet modification/extension of the system. Multi-function processors can incorporate the corresponding interlocks (open loop control tasks of the system). Interlock and modulating controls are to be so assigned to the processors in such a way that failure of any processor does not lead to shut down of the entire unit. In no case CPU loading should exceed 60% of its capacity. Bidder to submit calculation of CPU loading along with his bid.

4.02.10 Response Times

The system shall have adequate speed of response through all regimes of system loadings. The minimum criteria to be ensured are as follows:-

- a) Key board command to field equipment shall be executed and its confirmation shall be displayed on the screen within 1 second.
- b) The response for operator requested display (time between pressing of last key and appearance of last character on screen) shall be of the order of one to two seconds under all loading conditions.
- c) Dynamic parameters in the OS displays shall be updated in one second interval.

- d) The cycle time for open loop and closed loop controls shall be as follows:-
 - i) For critical closed loops like Steam Separator level control, main steam temp. control, feed water flow control, HRH steam temp. control, HP/LP bypass control, furnace draft control & combustion control, the loop cycle time shall be max. 100 milli seconds preferably 50 milli seconds.
 - ii) For non-critical closed loops it shall be max. 250 milli seconds (preferably 150 milli seconds).
 - iii) For all open loops, sequential interlocks & protection it shall be max. 100 milli seconds.

(The loop cycle time is defined as the time taken from change at input module to change in output module for command).
- e) All analog inputs to CLCS shall be acquired and data base updated within an interval of 50 milli seconds. Data for critical loops shall be acquired & data base updated at a faster rate to suit the requirements of (d) above.
- f) The digital inputs for SOE shall be monitored at 1 milli second resolution.
- g) The system shall acquire & check all inputs at the input scan rate. If the input is in alarm state (i.e. the input is in an off normal condition) the alarm status shall be annunciated, printed out and displayed within 1 second after the input is scanned.

4.02.11 Established Reliability

- i) All components and systems offered by the Bidder shall be of established reliability. The minimum target reliability of each component shall be established by the Bidder, considering its failure rate/meantime between failures (MTBF) & meantime to repair (MTTR), such that the availability of the complete system is assured for 8700 hours / year (99.7%) or better.
- ii) In order to ensure the target reliability the bidder shall perform necessary availability tests and burn in tests for major systems. Surge protection for electronic control systems, annunciation system and other solid state systems conforming to SWC test per ANSI C 37.90a (IEEE standard 472) and selection of proper materials, manufacturing processes, quality controlled components and parts, adequate derating of electronic components and parts shall be ensured by the Bidder to meet the reliability and life expectancy goals.
- iii) Continuous self checking features shall be incorporated in system design with automatic transfer to healthy/redundant circuits to enhance the reliability of the complete system.
- iv) In general, failure of equipment used for alarm purpose will cause switching to the alarm state.

4.03.03.04 Specifications for Operator Station, Engineering Work Stations

Each operating station & Engineering work stations and any other work stations/PC envisaged in plant shall meet following minimum requirements & as per latest trends at the time of supply:

- On board Intel – Xeon quad core, 3.46 GHz processor with 1066 MHz bus with Hyper threading or higher.
- 4GB DDR3 RAM (min.)
- 1 x 1000 GB IDE Hard Disc Drive of 7200 RPM or higher
- 1024 MB Graphic Accelerator
- System chipset: Intel Express
- 2 x RS – 232 ports
- 1 x parallel port
- 4 nos. USB ports. (2 nos. on front side)
- 1 x 52X DVD/CD Read Drive
- 16 X DVD R/W Drive
- 2 x Ethernet (10 / 100 / 1000MB) cards (Industrial Grade)
- UXGA graphics and monitor 1920 X 1080 , 256 colours with MRP II compliant, viewing angle 178° vertical & Horizontal and fastest response time.
- 1 x windows XP/7 Professional or latest & proven version of Windows OS professional with Multimedia
- Ethernet adapter
- Third party operating system, graphical users interface and software, if required.
- 2 nos. graphic output cards minimum

- Optical mouse
- Sound card
- Internal speakers
- Wireless internet & Blue tooth Interface
- Redundant power supply (In built)
- General MS Windows latest, MS-Office Professional, Adobe Acrobat, anti-virus McAfee or equivalent, AutoCAD etc.
- Application engineering & HMI software - to suit project Specific requirement
- All OWS shall be interchangeable

Preferred makes of OWS/EWS/PC's are DELL, HPCOMPAQ, NEC & IBM.

4.03.03.04.01 Peripherals for Operator Station, Engineering Work Stations & Server System

4.03.03.04.02 Full flat Monitors with LED back lighting

The bidder shall furnish OWS/EWS/Servers/PC with coloured **Full flat Monitors with LED back lighting**. OWS/EWS/Servers/PC with **Monitors** shall have a fast cursor control device like a track ball/optical mouse. All **Monitors** shall be of high resolution colour graphics type and with not less than 32 colours. The picture frequency shall not exceed 85 Hz. The resolution required is 1920 X 1080 pixel or better. The picture shall be stable and completely free of any flickering. The screen illumination shall be enough to give good readability. The screen dimensions shall not be less than 24" screen diagonal.

Antiglare hard coating shall be provided. High reliability and long life 24" (Industrial type) or better size monitors shall be supplied by the bidder. **Monitors** shall be equipped with all adjusting elements accessible on the front plate. Monitors with 3D capabilities for graphics shall be provided by bidder.

Monitors along with keyboard & optical mouse shall be mounted on supervisory control console specified elsewhere in the specification.

4.03.03.04.03 Key Board:

Functional key boards for plant operator station shall be of special type adopted to operation tasks and monitor functions. It shall contain all keys necessary for plant operation arranged in an ergonomically manner. Multi function keys shall be provided with automatic display for modified functions. Freely programmable keys (Minimum 101) shall be available for special user application.

Key Board shall be integrated into supervisors control consoles horizontal part.

Provision of functional keyboard shall be in addition to facility for operator control through mouse/track ball.

Membrane type keyboard shall be provided for operator interface with process for plant control and display functions to access plant data in conjunction with control OPERATING STATIONS. Membrane keypad shall be assignable with LED alarms, dedicated display selection keys with spare provision, hardware locking facility to set OPERATING STATION in engineer, supervisor or operator mode. The keyboard

shall have a minimum of 101 configurable keys for assigning most frequently used displays. A minimum of forty of those keys shall have two independently lit LED's used for event-specific alarm annunciation.

Keyboard shall be provided to enable the shift supervisor to develop graphic displays, control system software and system configuration for the DDCMIS. It shall be possible to perform operating interface functions from engineering OPERATING STATION. Assignable function keys shall be provided for execution of command, program etc. Hardware facility shall be provided to set OPERATING STATION in engineer or operator mode. QWERTY type keyboard shall be provided for engineer's functions. QWERTY type Key Board may be offered alternatively for OWS.

4.03.03.04.04 PRINTERS

Line Impact Heavy Duty Dot Matrix Printers

All printers shall be low noise (less than 60dB) type with a minimum of 136 columns. Printing speed shall be a minimum of 300 characters per second. Since the control room printers are high-speed printers, the system shall output to these printers at the rate of 1000 lines of printout per minute as a minimum. This rate shall be independent of the number of printers in simultaneous operation. Style of printing available shall be indicated by the Bidder. The printers shall have graphic capability and any OPERATING STATION display may be printed on the printer. The printing shall be bi-directional and in two colours black and red for sequence of event recording. Paper input capacity shall be with continuous paper feed.

Printers shall accept and print all ASCII characters via an EIA RS-232 C or twenty milliamp current loop interface. Parity checking shall be utilized.

All printers mounted shall be provided with a separate printer enclosure each. The enclosures shall be designed to permit full enclosure of the printers at a convenient level. Plexiglas windows shall be used to provide visual inspection of the printers and ease of reading.

Printer enclosures shall be designed to protect the printers from accidental external contact and each should be removable from hinges at the back and shall be provided with a lock at the front.

If one of the printers fails to operate, its functions shall automatically be transferred to the other printer. Failure of the printer shall be indicated on all OPERATING STATION's. Printer shall be offered and supplied from reputed manufacturer with latest proven technology. 5 Rims of papers shall be provided by bidder for each printer provided with subject plant.

Coloured Laser Jet printer

Printing Speed	20 ppm (min.)
Resolution	1200 X 600 dpi
Memory	128 MB (min.)
External Port	1 no. USB 2.0 port, and TCP/IP 10/100 Ethernet, Blue tooth interface

Duty Cycle	40,000 pages per month
Pages size	A3, A4, and Transparency etc. with automatic duplex printing facility.

Laser Jet printer (B & W)

Printing Speed	30 ppm (min.)
Resolution	1200 X 1200 dpi
Memory	128 MB (min.)
External Port	1 no. USB 2.0 port, and TCP/IP 10/100 Ethernet, Blue tooth interface
Duty Cycle	15,000 pages per month
Pages size	A4, A3, and Transparency etc. with automatic duplex printing facility. Paper tray - 2

Ink Jet Printers (Coloured)

Printing Speed	30 ppm (min.)
Resolution	1200 X 1200 dpi
Memory	64 MB (min.)
External Port	1 no. USB 2.0 port, and TCP/IP 10/100 Ethernet, Blue tooth interface
Duty Cycle	5,000 pages per month
Pages size	A4, Transparency etc.
Duplex printing	Automatic

Five sets of print cartridges and Five rims of papers shall be provided with each printer provided anywhere in the plant by bidder with each DDCMIS, DCS & PLC system and any other system specified elsewhere in specification.

Preferred makes of printers are HP, Canon, Fuji Xerox, & Epson.

4.03.03.04.05 External DAT Drive

The DAT drive is a serial back-up device. The DAT drive shall have read/write capability and shall be provided with all required hardware interface including error detection and correction facilities in each control room. The tape (total 10 nos.) of Sony make shall have the capacity of 12/24 GB min. The tape drive shall be specified as follows:-

- DC drive
- Tape format - QIC-80
- Data Transfer Rate – 5MB/minute.
- Seek time – 22 milli second

4.03.03.04.06 Hard Copy Facilities

The system shall be capable of copying hard copy of OPERATING STATION graphics through a video colour copier switch able to any OPERATING STATION.

The printer/copier offered shall be capable of copying OPERATING STATION image in 20 seconds.

4.03.03.04.07 USB Port Pen Drive

Twenty Five (25) no. USB Port pen drive per unit having 32 GB memory with read/write facility shall be provided.

Preferred makes of USB pen Drive are HP, Sandisk, Kingston, Strontium.

4.03.03.04.08 Scanner, Copier cum Printer (A3 size)

Resolution	:	1200 x600 dpi (optical) (min) for Printer 600 x600 dpi (optical) (min) for Scanner
Colour Depth	:	48 bit
Scaling	:	10 to 2000% in 1% increments
USB interface	:	required.
Memory	:	1 GB
Printing Speed	:	30 ppm (min.) for A4 size 20 ppm (min) for A3 size
Duplex printing	:	Automatic

4.03.03.04.09 DVD Writer

The DVD writer should be capable to read and write any DVDs as well as CDs. and shall be provided with all required hardware interface including error detection and correction. The DVD writer shall meet following minimum requirements:

- DVD write speed - 16x
- CD write speed - 52x
- Cache / Buffer size - 2MB
- Buffer under protection technology

Five nos of DVD (Re-writeable) shall be provided with each OWS/server provided anywhere in the plant by bidder with each DDCMIS, DCS & PLC system and any other system specified elsewhere in specification.

4.03.03.04.10 Digital B/W Copier cum Printer (A3 size)

01.	Type	:	Laser, tabletop / latest
02.	Printer Memory	:	512 MB (min.)
03.	Speed	:	Monochrome 30 ppm - A4 20 ppm – A3
04.	Resolution	:	600 x 600 DPI
05.	No. of color (Basic)	:	Monochrome
06.	Duty cycle	:	Monochrome more than 75000 pages / month
07.	Power supply	:	240 V, 50 Hz, 1 phase UPS
08.	Ambient temperature	:	0-50° C
09.	Humidity	:	95% non-condensing.
10.	Size of paper	:	Paper weight of 45 to 165 g/M ²

11. Networking Capability : USB / Ethernet
12. Coping : Max Original Size – A3, Continuous Coping (1-999)
13. Accessories :
 - i) Adapters
 - ii) Connector Cable
 - iii) Duplex Unit. Automatic
 - iv) Optional Paper feeder- 2 Nos

4.03.03.05 Lap Top

The LapTop shall meet following minimum requirements:

- a) Intel Centrino™ Mobile Technology.
- b) Intel Core – i7 Processor with 3.46 GHz, 4 MB L2 cache, 1066MHz FSB.
- c) 14" WXGA LED Screen with wide angle viewing.
- d) 500 GB 7200 rpm HDD with shock absorber.
- e) 4 GB 800 MHz DDR3 SDRAM (slot for 1no. additional RAM slot should be provided)
- f) 1 x windows XP Professional or latest & proven version o f Windows O S with Multimedia
- g) Slim type DVD-RW/DVD ROM combo drive.
- h) Internal 10/100/1000Mbps Ethernet card
- i) IEEE 802.11B connectivity port
- j) IR port
- Optical mouse
- k) 2Nos. USB ports & Wireless INTERNET & blue tooth interface
- l) External mouse connectivity and optical mouse
- m) Minimum 8 hrs battery backup.
- n) Recovery software tools.
- o) Sound cards
- p) Internal speakers
- General MS Windows latest, MS-Office Professional, Microsoft Visual Studio, Adobe Acrobat, anti-virus McAfee or equivalent, etc.
- q) Application engineering & HMI software - to suit project specific requirement

Preferred makes of Laptop are DELL, HPCOMPAQ, VAIO (Sony), Lenovo.

4.03.03.06 General Specification of the server:

- | | | |
|-----------|---|--|
| Enclosure | : | 6U Rack Mountable server / Tower type Sever |
| Processor | : | Intel Xeon Quad (4) Core 64 bit Processor capable 3.6 GHz with 16MB L3 cache memory per processor, Dual independent 1333 MHz system bus (2 way SMF) or better. |
| Memory | : | 64GB ECC DDR – 3, 800 SDRAM |

Video	:	Integrated with 64MB SDRAM
Resolution	:	1920 x 1080
Drives	:	HDD – RAID 5 (1000 GB) Ultra 320 SCSI adaptors with internal storage capacity 3.6 TB DVD/CDROM – 24X CD – RW/DVD IDE combo USB – 4 ports DAT – 36 / 72 GB
Peripherals	:	PS/2 keyboard Optical Mouse
Operating system	:	Windows 2008 server version standard / latest Enterprise Edition or latest & proven version of Windows Operating system
Backup & Disaster Recovery	:	VERITAS \ CA \ Tivoli \ any other
Environmental	:	Operating Temp range - 10°C to 35°C Humidity range - 8 to 80% (Non-Condensing) Vibration 0.25 G at 3 to 300 Hz for 15 Minutes.
Software	-	General MS Windows latest, MS-Office Professional, Adobe Acrobat, anti-virus McAfee or equivalent, etc. Application engineering & HMI software - to suit project Specific requirement
Miscellaneous	:	i. 1 Parallel port ii. 1 Serial port iii. 4 – 10/100/1000 MB/1GB network ports iv. Two non-boards and two added v. External SCSI port vi. Dual hot plug power supplies vii. Dual Hot plug fans viii. 2 PCI Express slots (1x4 lane and 1x8 lane) ix. 2 PCI X slots (64bit/100MHz) x. 2 PCI slots (one 32bit/33MHz, 5V & one 64bit/66Mz) xi. Redundant Server shall be provided, wherever required. xii. LED based 24" sized Monitors.

Preferred makes of OWS & Servers are DELL, HPCOMPAQ, Lenovo.

4.03.03.07 Industrial grade managed type Ethernet switches

Industrial grade managed type Ethernet switches shall be provided with in built diagnostic features, 20% spare ports & inbuilt redundant 24 V DC power supply features and Integrated Security features (IPS, ACL, Firewall). Industrial grade managed type Ethernet switch shall be rack mounted and comply with the IEC 61850 (3) and IEEE 1613 requirements. Switches shall have 10 GB module support for future upgradeability

4.03.03.08 The Firewall shall meet following minimum requirements:

Industrial grade Firewall appliance should facilitate multi-vendor, multi-application environment and should support third-party products on open alliance. It should support Active-Active configuration.

- i. The firewall should contain following features:
 - (a) Stateful inspection of packets.
 - (b) NAT functionality, including dynamic and static NAT translations
 - (c) Latest version of SNMP
- ii. The firewall must send log information to a separate log server via an encrypted connection. Firewall logging must not impact firewall performance.
- iii. Remote network access to the firewall should only be possible through the administration interface.
- iv. The firewall administration station must be capable of pushing firewall security policies and configurations to individual or multiple firewalls through a secure, encrypted connection to the firewall administration interfaces.
- v. Graphical User Interface (GUI) and a Command Line Interface (CLI) for making changes to the firewall rules set should be provided. (Access to the firewalls via the GUI or the CLI must be through an secure encrypted channel).
- vi. Any changes or commands issued by an authenticated user should be logged to a database configured on any of the machines in the LAN. The administration station must allow for a hierarchical architecture for rules set administration and viewing of firewall configurations Management.
- vii. The firewall must not support any unencrypted means of access to the firewall.
- viii. It should Monitor ALL network traffic-traffic at Firewalls (Internet and external networks), in the DMZ and detect known threat through deep packet inspection.
- ix. Detects unknown threats via anomaly scanning.
- x. Detect unknown threats via behavior pattern to protect from zero day attacks.
- xi. Keeps up-to-date on new threats and vulnerabilities.

4.03.03.09 Software License:

The Bidder shall provide software license for all software being used in DDCMIS/PLC/simulator/any other electronic/microprocessor based system. The software licenses shall be provided for the project (e.g. organisation or site license) and shall not be hardware/machine-specific. That is, if any hardware/machine is upgraded or changed, the same license shall hold good and it shall not be necessary for Owner to seek a new license/renew license due to upgradation/change of hardware/machine in

DDCMIS/PLC/simulator/any other electronic/microprocessor based system at site. All licenses shall be valid for the continuous service life of the plant.

In case the s/w license is dependent on no of points, then quantity to be considered is 30% above the finally implemented points.

Software Upgrades

As a customer/owner support, the Bidder shall periodically inform the designated officer of the Owner about the software upgrades/new releases that would be taking place after the each system is commissioned and handing over to owner, so that same can be procured & implemented by bidder at site.

The future updated version of any type of software shall be supplied free of cost as and when such software is upgraded, on request by owner until 5 years from the date of commissioning of the unit.

- 4.03.03.10 Separate Laptops shall also be provided with all master software loaded and engineering of DDCMIS, DCS, simulator & any other control system individually. Similarly additional Laptops shall be provided with all master software loaded and engineering of PLC system individually.

As explained above, One No. Laptop with necessary master software loaded and engineering of each control System shall be supplied individually.

4.03.03.11 **SOFTWARE DOCUMENTATION AND SOFTWARE LISTINGS**

All technical manuals, reference manuals, user's guide etc., in English required for modification/editing/addition/deletion of features in the software of the DDCMIS, DCS & PLC / any other microprocessor based control system/simulator etc shall be furnished. The Bidder shall furnish a comprehensive list of all system/application software documentation after system finalisation for Owner's review and approval.

The software listings shall be submitted by the Bidder for source code of application software and all special-to-project data files.

4.03.04 **Programming, Diagnostic and Engineering Work Station**

There shall be Two (2) no. work station with 24" sized (Industrial type) LED monitor, associated hard disk 3½", Two color laser jet printer and associated peripherals, as like 52X CD drive, DVD Drive, DVD/CD writer, 1 No. A3 sized Scanner copier cum laserjet printer, and A3 heavy duty industrial grade Coloured LJP with DDCMIS.

For PLC based control system, same shall be provided as listed in Annexure A.

The Engineering stations provided with DDCMIS, DCS & PLC shall have all the function of programming/ configuration/modification/ reconfiguration and documentation. The features and facilities to be included are as under:-

- a) Configuration or re-configuration of a system.
- b) Possibility to introduce or modify parameters.
- c) Documentation of system configuration.

4.05.00 Design Criteria for BOP packages' Control System

4.05.01 Design Criteria for Programmable Logic Controller (PLC) System

The PLC for BOP packages shall have following features:

- i. The PLC system shall fulfill and demands emanating from the domains
 - Automation
 - Monitoring
 - Process control
 - Management
 - Engineering
- ii. Uniform operator machine interface
- iii. Reliable user guidance
- iv. Comprehensive redundancy concept
- v. Modern object oriented software structure
- vi. Shall be able to communicate with external system and intelligent field equipment
- vii. Simple central project planning and configuration aids
- viii. Integrated documentation system
- ix. Integrated diagnosis and service
- x. Commissioning support
- The Control System shall have on-line simulation & testing facility.
- xii. The system shall have the flexibility to easily reconfigure any controller at any time without requiring additional hardware or system wiring changes and without disabling other devices from their normal operation mode. Modifications shall not require switching off power to any part of the system.
- xiii. Fault Diagnostics

Complete software for microprocessor based system including the communication software between systems, MIS system etc., shall be supplied and implemented. The software shall be also included for equipment performance test, life evaluation, equipment capability curve and alarm analysis, Management information system, etc.
- xiv. General I/O requirements of PLC based system shall be as per cl. No. 4.02.08.02, 4.03.11 and Annexure B.
- xv. Bidder to note that all PLC system shall be from same manufacturer only. PLC system supplied & engineered through system house shall not be acceptable. It should be supplied & engineered directly from PLC manufacturer only. It is preferred to have each PLC system with hardwares from same family of Plant DDCMIS.
- xvi. Design & Functional Requirements as per the cl. No. 4.02.00 detailed for DDCMIS/DCS system shall be applicable for each PLC based control systems.
- xvii. PLC shall be provided with necessary redundant ports & complete hardwares for Auto time synchronization from Master clock time by bidder.

4.05.02 Technical specification for PLC

- 4.05.02.1 The latest proven PLC system shall be provided. PLC should be sourced from original manufacturers; PLC from system house shall not be acceptable. PLC system shall be complete with hot standby redundant CPU of word length of 32bits minimum, Input /

Output modules, dual serial link interface module for connecting Input / Output Modules, dual Communication Processors, dual Memory modules and redundant Power supply units. Power supply unit shall be redundant for each CPU & I/O rack. PLC system will be interfaced with DDCMIS through OPC dual redundant communication interfacing (to be provided at PLC & DDCMIS end) for important process parameters. PLC shall confirm to IEC – 61131.

- 4.05.02.2 Redundant C PUs in h ot s tandby m ode sh all oper ate on fault tolerant mode with continuous self and cross monitoring facility. Redundant CPU/controllers shall be placed separately and shall not share the same motherboard. Failure of the active CPU shall not adversely affect the operation of the plant in any perceptible way. Failure of t he ac tive C PU will l ead t o t ransfer o f t he t asks being performed to the other healthy CPU within fastest possible transfer time (i.e. ≤ 50 m sec.) without causing any output to drop during the Transfer period. In the Event of the both the CPU failure, the system shall revert to the Fail-safe mode. The CPUs shall not be loaded over 60% of the Individual capacity even under worst data loading conditions. It shall be possi ble t o switch from the active t o t he back-up C PU and v ice v ersa from Operating station as well from the CPU front panel. (The worst data condition of PLC means all modules in active mode, printer in operation, OLCS&CLCS logics active and process in r unning co ndition). Data bus loading sh all not be more than 50% . This configuration shall be applicable for each type of PLC based control system. Engineered solutions for redundancy in CPU & I/O cards are not acceptable.
- 4.05.02.3 The sy stem sh all be o f m odular co nstruction and ex pandable b y addi ng har dware modules and incorporating them in the address register. Bidder shall provide at least 20% ov erall w ith m inimum t wo no. sp are c hannels as hot-on-rail sp ares in ea ch configured cards / Modules. In addition to this 10% or minimum one no. extra assigned complete spare cards mounted on rails in sub-racks for each type of I/O modules shall also to be provided. The spare channel and cards shall be fully wired up to termination cabinets. Spare Philosophy as detailed in c l. No. 4.03.11 for DDCMIS / DCS system shall be applicable for each PLC based control systems.
- 4.05.02.4 The memory unit of the CPU shall be f ield expandable. The memory capacity sh all be sufficient (min. 8 M B pe r CPU) f or system operation and sh all ha ve t he ca pability for future expansion at least to the tune of 40%. The application program / sequence logic etc. shall be stored in non-volatile memory (EPROM). However all the dynamic memories shall be provided with battery back up with at least for 96 hours. Lithium or Ni-cd battery shall be use d. The quantities of Hot standby redundant CPU/controllers for each PLC system sh all be f inalized dur ing det ailed eng ineering by o wner d ependi ng upon CPU/controller's worst dat a l oading co nditions and C PU/controller's functional distribution.
- 4.05.02.5 The max number of Input / Output points per card shall be 32 for digital and 16 for Analog / Thermocouple / RTD. No. of channels may also reduced to meet the I/O cards feature specified in NIT. Individual input channels shall have galvanic isolation. Output points shall al so ha ve opt ical / g alvanic isolation. Merely f using o f i ndividual or a gr oup of channels is not acceptable. The I/O cards shall be rack mounted. Failure of Analogue I/O cards, binary cards / modules shall also be displayed on the Engineering cum diagnostic station.

- 4.05.02.6 The data communication system of the PLC including that of its redundant system bus with hot back up and other allied buses such as I/O bus, local bus etc., shall fulfill the following minimum features. The bidder shall furnish all the calculation details of CPU utilization and Bus loading. Bidder shall also furnish communication protocol used for the offered PLC.
- i. Communication links (I/O bus) between CPU and individual Input & Output (I/O) modules rack shall be dual redundant with 10 Mbps speed and 16 bit CRC data protection feature. In no case failure of a link shall affect the control of the plant.
 - ii. The communication system design shall ensure that any single point failure on the system bus / media shall not disrupt more than single message and disrupted message shall be automatically retransmitted after the standby communication link takes over control.
 - iii. Failure of physical removal of any station / modules connected on the system bus shall not lead to any loss of communication.
 - iv. Diagnostics display both at operating workstation and module front end shall be provided for easy fault detection.
 - v. Bus change over from active bus to stand by bus, during failure of active bus shall be performed automatically and bumpless. Such event shall be suitably logged or alarmed.
 - vi. The system communication between PLC controllers and the operators stations shall be conducted at high speed minimum 100 Mbps with Ethernet based open protocol with no collision feature to avoid data jamming / overloading of the system. The communication bus, serial link etc. shall have adequate protection against electrical noise and mechanical damage.
 - vii. System should have open bus structure and should allow further extension facility and connection with any third party system.
 - h. PLC Network shall also be provided with external surge protection system and industrial firewall.
- 4.05.02.7 Man Machine Interface (MMI) shall be industrially ruggedised Operator's station based on latest window based market available software along with its peripherals like LED monitor, printer, mouse. Engineering functions shall normally be carried out from dedicated workstation or operating station as per annexure-A "control system for BOP". In case a dedicated engineering station is provided, EWS shall also be worked as operating station through password / Hardware lock. The monitor refresh time i.e. latency time should be ≤ 2 second.
- 4.05.02.8 The Operator's station shall perform the following minimum requirements.
- a. Selection of Auto / Manual, Open / Close operation, sequence auto, start / stop operation etc.
 - b. Dynamic Mimic display detecting the entire process for control monitoring purpose.

- c. Alarm monitoring, report generation, logs, calculations and printing of logs, reports, trends etc.
- d. Online / historical trending, historical storage and retrieval of data.

4.05.02.9 Software provided shall be latest, modular, upgradable and industrially proven. It shall have capability for multi tasking, multi programming, multi user operation in real time environment and support for third party system. Bidder shall provide the following minimum requirements:

- 1. Required software for fulfilling the complete implementation of the control logics, operation displays, logs, data storage, retrieval, diagnostic and other functional requirements as indicated in this specification.
- 2. Detail documentation on all programming software's and this shall be part of the O & M manual.
- 3. Supply of Licensed version of all software both in edit and run mode with multi – user license. All the third party softwares should be latest and market available.

4.05.02.10 a. Bidder shall provide and connect suitable communication hardware / software/ cables and other accessories required for connecting all numerical relays as per IEC – 61850 of auxiliary in PLC / SCADA where PLC with OWS.

b. Bidder shall provide firewall (hardware) in various layers to protect PLC from other network as per ISA – SP – 99. Communication to any third party system shall be via industrial grade anti spam, anti virus Firewall only.

c. Bidder shall provide redundant software/hardware link with “online” in Motion Bridge computer and other belt weight system with CHP PLC system to calculate coal flow to indicate following status:

- i. Daily and cumulative coal unloaded by track hopper.
- ii. Daily and cumulative coal sent to stockpile.
- iii. Daily and cumulative coal sent to boiler bunker.
- iv. Amount of coal available in stockpile.

d. Remote indication in centralized control room (DDCMIS) for total coal unloaded in 24 hours from ECHS shall be provided.

e. A pneumatic control valve shall be provided at the interconnection line between service air header and instrument air header before air dryer unit. When instrument air header pressure falls below set value, the control valve will start opening and maintain the instrument header pressure at specified level in line with plant requirement. A gain when instrument air header pressure goes above specified level in line with plant requirement the control valve will fully close automatically. Complete system shall be in bidder scope.

4.05.02.11 PLC shall specifically meet the following requirements:

- (a) PLC shall have extensive self-diagnostic capability. Self diagnostics shall include both module level diagnostics as well as channel level diagnostics
- (b) PLC shall have hot standby redundant processors/controllers. This shall mean the fulfillment of the following requirements:

- (i) Automatic synchronisation of primary processor/controller of PLC with secondary processor/controller
- (ii) Bumpless switchover to secondary processor/controller of PLC when the primary fails.
- (c) Automatic program and data equalisation in the event of any on-line program / edit executed in the primary processor/controller of PLC.
- (d) Automatic "Forcing Bit" update in the secondary processor/ controller of PLC when any " Forcing is applied in the primary processor/controller of PLC.

4.05.03 **SYSTEM REQUIREMENT & SPECIFICATION**

- 4.05.03.1 The system shall have high MTBF and shall be hot maintainable. The system hardware shall be designed to be fault avoidant by selecting high grade components of proven quality and properly thermally de-rated design. The system shall have extensive fault monitoring, self surveillance & on-line self diagnostic capability so that failure up to module / card level is immediately detected. Each of the modules shall have its self – diagnostic system. The operator station located at the area control room shall be used for fault data presentation and monitoring purpose.
- 4.05.03.2 The system shall have capability to automatically check & correct gain & drift for ADCs on-line.
- 4.05.03.3 All data exchanged in a bus shall be fully monitored & checked for validity.
- 4.05.03.4 Loop Cycle time in PLC shall be equal to or less than.
 - a. OLCS : 100 ms or less
 - b. CLCS : 250ms or less
- 4.05.03.5 Following operations will be performed on I/Os, as required:
 - 1. Square root extraction
 - 2. Pressure & Temperature compensation
 - 3. Responsibility check of all inputs (analog specially), validate and quality tagging like good, bad, suspects etc
 - 4. Channel wise engineering unit conversion.
 - 5. Contact bounce filtering with adjustable time constant.
- 4.05.03.6 All controllers shall be freely configurable with respect to requisite control algorithms. An extensive library of macros shall be included for the purpose adequate software capability shall be provided to implement closed loop control functions as follows:
 - i) P, PI, PD and PID control and their variations.
 - ii) Open loop (On- Off, sequence control)
 - iii) Cascade control
 - iv) Ratio control
- 4.05.03.7 For open Loop Controls, the system shall have, as a minimum, the following features:

- a) Logic functions like AND/OR/NOT gates, timers (on-delay, off-delay), shift registers, counters, latches, flip-flops, mono – shots, tantalizers etc.
- b) The automatic sequence control to ensure sequential start up and shut down of auxiliaries / equipment. Sequence control shall be performed in groups initiated by command from operator's console. A sequence shall be made of steps executed in predetermined order according to logic criteria. For each step there shall be a provision for 'waiting time' and 'monitoring time', and it shall output an action on the process. System shall have the capability to bypass one step if desired by the operating personnel by forcing an input or output from the operator's station. Such action however will be registered as an exception or alarm.
- c) Increase the reliability and availability of the plant as a whole, for example, by timely and correct switchover to standby drives etc.
- d) Basic interlock and protection logic related to safety of individual drive and plant equipment. All inputs required for protection system shall be on high priority basis. In the event of either loss of control power or control signal input to the drive, the drive shall remain in its last position unless specifically required otherwise. The system shall be designed such that no upset occurs either to process or to the drive when the power is restored.

4.05.03.8 Interface of the PLC system with AC Solenoids & DC Solenoids shall be in the form of potential free contacts via interposing relay modules mounted in the interposing relay cabinet. 20% additional interposing relay modules shall be provided as installed spare. For AC solenoids and contactors directly driven from output cards, arc suppressors & MCB shall be provided across the coil.

4.05.03.9 **Displays**

4.05.03.9.1 The operator's station shall be responsible for handling all commands as well as in generating desired displays, logs, reports, alarms and printouts. Security in different levels shall be provided to prevent unauthorized access to the system.

4.05.03.9.2 Programming shall also be permissible by drawing Ladder or Boolean diagram or through any easily understandable language. Single programming instruction / command shall be sufficient to delete a program rung from memory. Similarly, any rung can be inserted into the existing program. The active and the standby CPU programs shall equalize automatically, once the new program is permitted to 'RUN'.

4.05.03.9.3 Updating time and reaction time (system's response to an operator's command) shall be provided for operator station as follows:

- a. Calling up a mimic : 1 sec or better
- b. Updating status signal in mimic : 1 sec or better
- c. Updating variables in a mimic : 1 sec or better.
- d. Issuance of command to output : 2 sec. or better
(without considering travel time and process lag)

4.05.03.9.4 Programmable Controller shall be responsible for real time process Parameter monitoring, storage and display. Basic requirements are (i) Operator Interface, (ii) Basic

Calculation, (iii) Alarm Monitoring & Reporting, (iv) Display generation, (v) Logs, (vi) Trend Recording & (vii) Historical Storage & Retrieval.

4.05.03.9.5 The displays at the operator console shall be classified into overview Display, group display, point display, alarm display and trend display.

- a) Overview display – This display is to enable the operator to set an overview of the entire plant section.
- b) Group display – The group display page shall display several sub-sections & present status information.
- c) Point display – Along with the specified parameter value, this page should indicate historical trend of the parameter.
- d) Trend display – This display include real time/historical trend display facility including Dynamic Graphic Display & Bar Graph Display.
- e) Alarm Message Display – It shall be possible to display process as well as system and diagnostic alarms for operator's attention and action. Alarm shall appear immediately on the operator station as and when they occur on priority basis. In addition to alarms appearing on displays, the system shall also be able to display alarm summary and alarm history listing the date and time of occurrence, tag number, point description, type of alarm (absolute value or deviation), serial number of alarm in the sequence of occurrence etc. Alarm shall disappear from display only when they are acknowledged and cleared. Any abnormal condition in any sub-system or any other function devices shall be displayed as system alarm message on the operator console irrespective of display selected.

4.05.03.9.6 The system shall print the following logs as minimum as defined in the Following clauses. The printing of these logs shall be initiated automatically at prescribed time intervals, or initiated on demand by the occurrence of predefined events.

Shift/Daily Log

A Shift/daily Log shall be provided to furnish data for routine analysis of plant performance. This log shall be automatically printed at specified time each day and on demand at any time.

4.05.04 Salient hardware / software features of the PLC system

The salient hardware / software features of the PLC system for I/O handling shall be as follows.

1. Input filters to attenuate noise.
2. SWC of 500v DC common mode and 500V AC peak to peak
3. Comm. Mode Noise rejection for analog inputs of 120dB at 50 HZ
4. Normal mode noise rejection for analog inputs of 60 dB at 50 HZ
5. LED indicators on each card to show status of input
6. All the outputs shall be with individual fuse.
7. K type thermocouple mV input where applicable.
8. Pt-100 three wire resistance thermometer input where applicable.

9. 24 V DC power supply to field mounted two wires transmitters.

4.05.04.1 The salient hardware / software features of the CPUs as follows:

- | | | | |
|----|-------------------------|---|--|
| a) | Watch dog timer | : | Periodical reset, Alarm and interruption, if not reset within stipulated time. |
| b) | Max. Scan time for I/Ps | : | 1 sec. max. for measurements |
| c) | Maximum Scan Rate | : | 2.5 ms (per k word) |
| d) | Memory Capacity | : | 40% spare capacity after full utilization
Expandable in multiples of 16K. |
| e) | Comm. Processor | : | Integral / Separate |
| f) | Power Supply | : | Dual redundant at each CPU rack |
| g) | Control Processor | : | 32 bit processor , RISC based. |
| h) | Battery back up for RAM | : | Ni-Cd / lithium type, at least for 96 hrs
continuous Operations during power failure. |
| i) | Diagnostic feature | : | Periodic, automatic, self-diagnostic. Result
available at the Operator's Station. |

4.05.04.2 **Input / Output Modules:**

Bidder to note that All I/O cards shall be sourced from their original manufacturers/Principal. Indigenous cards shall not be accepted. No. of channels per I/O card may reduced to meet the I/O cards features specified in NIT. The salient features of the Input / Output modules are as follows:

- | | | | |
|----|-----------------------|----------------------------|---|
| a) | All I/O Cards | | |
| | 1. | Ambient temp. | : 0-50 degree C |
| | 2. | Surge withstand capability | : IEC-255.4 |
| | 3. | Power Supply | : Dual redundant at each I/O rack |
| b) | Digital General | | |
| | 1. | No. of channels / card | : 32 max |
| | 2. | Interrogation voltage | : 24/48 VDC |
| | 3. | Status Indicator | : LED Type./channel |
| | 4. | Isolation | : Optical (channel to channel) |
| | 5. | Electrical Isolation | : between system and field |
| c) | Digital Input Module | | |
| | 1. | Contact bounces filtering | : Adjustable time constant of 15m.sec. |
| | 2. | Self Diagnostic | : Wire break, Short Circuit |
| d) | Digital Output Module | | |
| | 1. | Output protection | : Short ckt protected and individual fuse |
| e) | Analog General | | |

1. No. of channels/card : Input /output – 16 channel
2. Isolation : Galvanic/Optical (channel to channel)
3. Status Indicator : LED Type./channel
4. Fuse protection for failure : Individual for each signal

f) Hi-Level Analog Input Module

1. Type of input : 4-20mA DC & 1-5VDC
2. A/D Converter : 14 bits + Sign (or better)
3. Accuracy : 0.1% or better
4. Diagnostic : A to D / Channel fault, Short circuit, wire break
5. Power of transmitter : 24 V DC 2W type

g) Low Level Analog input Module

1. Type of output: PT-100; T/C (As required)
2. C-J-C : On Module
3. Accuracy : 0.1% or better
4. A/D converter : 14 bits + sign (or better)
5. Diagnostic : A to D / Channel fault, short circuit, wire break

h) Analog Output Module

1. Type of output: 4-20mA DC
2. Accuracy : $\pm 0.1\%$ or better
3. Load : 600 OHM
4. Diagnostic : Channel fault

i) The maximum number of channels with LEDs indications that can be provided in a single module shall be:

- (i) Digital input module/ Digital output module - 32
- (ii) 4-20mA input/output modules - 16
- (iii) Thermocouple / RTD input module - 16

j. Input/Output modules shall have the following features:

The functions performed on digital inputs shall include:

- (i) Signal isolation (optical)
- (ii) Fuse protection & monitoring
- (iii) Short circuit protection
- (iii) Contact bounce protection
- (iv) Contact monitoring for trip and causes of trip inputs
- (v) Contact interrogation at 24/48 V DC
- (vi) Configurable as status input, latched input or pulse input
- (vii) Direct or reverse sense
- (viii) Alarming of abnormal state

- k. Digital outputs shall have the following characteristics:
 - i) Individually fused
 - ii) Individual contact suppression
 - iii) Configurable as momentary, latched or pulse- width modulated Outputs
 - iv) Individually definable default state
 - v) Output read back verification
 - vi) Short circuit protection

- l. Analog inputs can be 4-20 mA DC, RTD, thermocouple. A/D converter shall have a minimum resolution of 14 bits. Functions performed on analog inputs shall include
 - i) Signal isolation (Galvanic/opto coupling)
 - ii) Fuse protection and fuse failure detection
 - iii) Transmitter power supply at 24 V DC
 - iv) Input filtering for noise level
 - v) Cold junction compensation for thermocouples
 - vi) Transmitter monitoring for parity, wire break, live zero and end limit values
 - vii) Monitoring of A/D conversion
 - viii) Test for substituted value
 - ix) Conversion to engineering units
 - x) Test for normal or extended range
 - xi) Detection of open circuit for thermocouples
 - xii) Alarm limit testing for high, low, high high and low low substituted values
 - xiii) Rate of change - positive and negative dead band
 - xiv) All analog signals fed to the control system shall be acquired and validated.

- m. Analog outputs shall be 4-20 mA DC with the following characteristics:
 - i) Direct or reverse operation
 - ii) D/A per output and power regulator per output
 - iii) Loop check back of output
 - iv) Default options upon failure
 - v) 5-segment output characterization
 - vi) Go to zero current

4.05.05

PLC Configuration:

The PLC configuration will have a hierarchy of industrial grade open system architecture for management information system (MIS) and closed system architecture for plant operation and control system.

The specification of Peripherals for Operator Station, Engineering Station & printers for PLC/microprocessor based system shall be as same as specified at cl. no. 4.03.03.04.

The complete MIS system including hardware, software, cables etc, as required shall be provided. This shall acquire dynamic pre configured points and mimics as required by Owner.

The closed system architecture for plant operation and control system is secure and deterministic system for real time operations of the plant.

Industrial grade managed type Ethernet switches shall be provided with features as same as specified at cl. no. 4.03.03.07.

PLC Network shall also be provided with external surge protection system and firewall.

"The Bus systems (like Profibus/ Modbus etc) or the Serial Port Systems (like RS-232/ RS-485 etc) shall be protected with suitable surge protection devices, confirming to the latest IEC-61643-21 guidelines. The surge handling capacity of device shall at least be 10 KA, 8/20 μ Sec between core-core and 20 KA, 8/20 μ Sec between core-ground. The device shall be pluggable & on-site testable".

All the operator stations will be 'work stations grade' as same as specified at cl. no. 4.03.03.04 and are required to reside on the main redundant bus running on IEEE 802.4 or IEEE 802.5 to facilitate determinism.

4.05.06 Redundancy Criteria (For details also refer chapter no. 2)

- i. Redundancy of components and systems shall be dictated by availability criteria to ensure the system a vailability target as well as safety c onsiderations in c ritical applications.
- ii. Dual/Triple redundancy f or s ensors and t ransmitters w ill b e u sed f or c ritical and semi critical applications i.e for interlocks/trip/protection conditions (as decided by Owner).
- iii. The Wiring S cheme for i nputs/outputs to/from PLC co ntrol sy stem sh all be as same specified at Vol. V, cl. No. 4.02.08.02.1.
- iv. Sensor redundancy (1 out of 2 or 2 out of 3) requirement shall be indicated in the respective control system.
- v. The C PU / C ontrollers, c ommunication m odules, dat a hi ghway, po wer s upply modules, etc for all PLCs shall be 100% hot standby redundant.
- vi. All drive input/output modules redundancy shall be as per Annexure – B.
- vii. All input/output of SCADA from/ to breaker & isolators shall be redundant.
- viii. Redundant Cooling fans with fire retarded filter for panels/cabinets

4.05.07 CONTROL PANEL AND OPERATOR INTERFACE (For details also refer chapter no. 6)

- i. Operating console desks for OPERATING STATION's and KB shall be provided by bidder along with their printers in AC control room.
- ii. OPERATING STATION/KBD shall generally be used for control and monitoring.
- iii. Complete industrial grade Furniture for mounting Operating stations, Swivel Chairs, Printers, Keyboards, Computer etc. shall be furnished by bidder.

- iv. In the Back up Control desk and relay based system following operator interface devices shall be provided as per Annexure A.
 - a) Control station (illuminated P.B. stations, Desk P.B., control switches etc).
 - b) Hardwired Annunciator with push buttons.
 - c) Coloured Mimic with LEDs for Drive status (ON, OFF, & trip) and level (Low & High) of tanks.
 - d) Process recorders, indicators & Ammeters as decided during detailed engineering.
- v. Control panels housing the control cards/equipment marshalling cabinets shall be located in a control room; and shall have IP-32 min. degree of protection as per IS-13947 offering dust and vermin protections, 2 mm thick steel sheets (CRCA) shall be adopted for fabrication, consistent with weight of devices, control equipment to be mounted. UPS panels shall be with 2 mm thick steel sheet (CRCA). Cable gland plate thickness size shall be 3mm. Mimic shall be made of Acrylic sheet with thickness of minimum 6/7 mm.
- vi. Panels shall be furnished complete with requisite accessories such as transformers, regulators, switch fuse units, MCB, MCCB and other power supply equipment to adopt the sources of power supply to requirements of panel mounted instruments and devices.
- vii. All panels, cabinets and enclosures shall be furnished, fully, wired with necessary provisions for convenience outlets, internal lighting, grounding, ventilation, space heating, and vibration isolation pads, double compression cable glands, integral piping and other accessories as per IS: 5039- 1969.
- viii. The sealing of panels/cabinets/enclosures bottom with bottom plate. Double compression cable glands and suitable sealing material to prevent entry of dust shall be in the Bidder's scope. Suitable arrangement for preventing fire propagation through cable entry points like fire seals etc. shall also be provided at cable entry points.
- xi. Fire/Smoke Detector, Neoprene/silicon Gasket, Exhaust Fans with louvers & filters shall be provided in all consoles and panels.
- x. All the panels shall be equipped with Anti vibration pad of 15 mm size.
- xi. PLC with OWS –**
 - a. All winding/Bearing Thermocouple/ RTD shall be connected to PLC.
 - b. All analog inputs i.e. Temperature, Pressure, flow, level, vibration etc. shall be connected to PLC.
 - c. Only important parameters shall be display on desk / Panel.
 - d. Bidder shall provide Ammeter on panel for all HT Motor current & ≥ 15 KW LT Motor and very important LT drives as decided during detail engineering.

Checklist for Serial Communication between maxDNA Systems and Foreign Device :BHEL**A Device Specific :**

SN	Parameters	Options available	Remarks if any
1	Modle No.& Make of Device		
2	Communications Link Options	☐ Multidrop ☐ Peer to Peer ☐ N/w topology attached	
3	Protocol Mode (Device is a)	☐ Master ☐ Slave ☐ Master/Slave	
4	Protocol	☐ RTU ☐ ASCII ☐ Other -----	
5	Master	☐ System maxDNA ☐ Other -----	
6	Dist.bet.maxDNA System & Device*	☐ ----- Feet ☐ ----- Meters	

B Electrical Specific :

1	Interface Type	☐ RS232 ☐ RS422 ☐ RS485	
2	Wiring at Device end	☐ 2 Wire ☐ 4 Wire	
3	Transmission Channel	☐ Half Duplex ☐ Full Duplex	
4	Baud Rates (bps)	☐ 1200 ☐ 2400 ☐ 4800 ☐ 9600 ☐ 19200	
5	Databits	☐ 8 ☐ 7	
6	Stopbits	☐ 1 ☐ 2	
7	Parity	☐ None ☐ Odd ☐ Even	
8	H/w & Software Handshake	☐ Yes ☐ No	
9	Response Timeout time (Sec)	☐ ----- ☐ Configurable timeout	
10	Data Formats Supported	☐ Boolean ☐ Real ☐ Char ☐ Sn.Int ☐ UnSn.Int	
11	Transmission mode	☐ Asynchronous ☐ Synchronous	

C Application Specific : *

1	Primary Function*	☐ Data Acquisition ☐ Data Acquisition & Control	
		☐ Download parameter sets	
2	Analog Points to read	-----Nos. ☐ Details attached ☐ Details not attached	
3	Analog Points to write	-----Nos. ☐ Details attached ☐ Details not attached	
4	Digital Points to read	-----Nos. ☐ Details attached ☐ Details not attached	
5	Digital Points to write	-----Nos. ☐ Details attached ☐ Details not attached	
6	Memory / Flag Points to read	-----Nos. ☐ Details attached ☐ Details not attached	
7	Memory / Flag Points to write	-----Nos. ☐ Details attached ☐ Details not attached	

D Hardware Specific :

1	Cable type	☐ Boolean cable ☐ Twisted pair cable	
2	Cable Details Enclosed	☐ Yes ☐ No	
3	Any specific Converter required	☐ Yes ☐ No ☐ Details enclosed	

E Device Documents :

1	Manufacturer's Documents*	☐ Tech., Spec. ☐ Operating Manual	

***Notes:**

A6 To identify converter requirement and cable length.

C The sr.no.1 to 7 are reqd.to be furnished for interface impl. :such as Tagname,Description,point type, modbus(Register) address,EU,range & device (dlave) address

C1 What is the primary purpose of the communications link?

E1 Reqd. Contents : This document must provide an overview of the device including its intended use(a general technical,communication & electrical details)

Format for vendor to furnish signal
Exchange list between DCS-PLC

Page 569 of 680

 PEM :: C&I		STANDARD QUALITY PLAN FOR PROGRAMMABLE LOGIC CONTROLLER							QUALITY PLAN NO.: PE-QP-999-145-I036 ___			
									VOLUME IIB			
									SECTION D			
									REV. NO. 01		DATE: 24.08.2007	
									SHEET 1		OF 8	
Sl. No.	Component / operation	Characteristics Checked	* Category	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records P	Agency \$			Remarks
										W	V	
1.0	Materials /Components											
1.1	Panels & Control Desks	Physical Inspection for Dimensions, Painting, Cutouts, Lifting / Locking Arrangements, Components, Drawing Pocket, Mounting accessories, Plinth & AV Pads, Cable Gland Plates, Hardwares, Hinges, Louvers & Filters, Fans & Panel Lamps	MA Visua	I	100%	Contract specifications, Approved GA Drawings, BOQ	As per ref documents. No physical damage.	BHEL Quality Inspection Report.	3/2 2		1	
1.2	Power Supply/Packs, Battery & Battery charger, Transformer, UPS.	Physical Inspection Physical Damages Dimensions Mounting Accessories	MA Visua	I	100%	Contract specifications, BOQ.	As per reference documents, Test Report	BHEL Quality Inspection Report.	3/2 2		1	
1.3	Indicating Lamp, Annunciator, Meters, Transducers, Signal Converters, Instruments, Single Loop Controllers	Physical Verification Physical Damages Dimensions Accessories	MA Visua	I	100%	Contract specifications, BOQ.	As per ref documents No physical damage. Test/ Calibration report.	BHEL Quality Inspection Report	3/2 2		1	
1.4	PLC processors, I/O modules, Power Supply modules, Communication modules, Mounting Racks, Ethernet	Physical Inspection • Identification Labels • Physical Damages • Quantity • Spare Capacity	MA Visua	I	100%	Product Catalogue, Data sheets, Approved Configuration diagram, BOQ	As per ref documents. Test Certificates	BHEL Quality Inspection Report.	3/2 2		1	

LEGEND: * CR - Critical characteristics
 MA - Major characteristics
 MI - Minor characteristics

\$

P - Agency Performing the Test.
 W - Agency Witnessing the Test.
 V - Agency Verifying the Test.

1 - BHEL
 2 - Vendor
 3 - Sub-vendor

(बीएसडीएम)  PEM :: C&I		STANDARD QUALITY PLAN FOR PROGRAMMABLE LOGIC CONTROLLER						QUALITY PLAN NO.: PE-QP-999-145-I036__				
								VOLUME IIB				
								SECTION D				
								REV. NO. 01		DATE: 24.08.2007		
								SHEET 2		OF 8		
Sl. No.	Component / operation	Characteristics Checked	* Cate gory	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records P	Agency \$			Remarks
										W	V	
1.5	CPU, Monitor, Keyboard, Mouse, CD Drives, Printers, OS, System Software, Engineering software in the form of Licensed CD.	Physical Inspection Identification Labels, Tech. Specification Physical Damages Accessories Installation arrangements for Computers & Printers	MA	Visual	100%	Contract specifications, Product Catalogue, Approved GA / Configuration drawing, BOQ.	As per reference documents.	BHEL Quality Inspection Report.	3/2 2		1	

LEGEND: * CR - Critical characteristics
 MA - Major characteristics
 MI - Minor characteristics

\$

P - Agency Performing the Test.
 W - Agency Witnessing the Test.
 V - Agency Verifying the Test.

1 - BHEL
 2 - Vendor
 3 - Sub-vendor

(बीएसडब्ल्यूएम)  PEM :: C&I		STANDARD QUALITY PLAN FOR PROGRAMMABLE LOGIC CONTROLLER						QUALITY PLAN NO.: PE-QP-999-145-I036__				
								VOLUME IIB				
								SECTION D				
								REV. NO. 01		DATE: 24.08.2007		
								SHEET 3		OF 8		
Sl. No.	Component / operation	Characteristics Checked	* Cate gory	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records P	Agency \$			Remarks
										W	V	

2.0 Assembly												
2.1	Functional Test for HMI/OVS devices such as Monitors, Keyboards, Mouse, Printers etc.	Operation	MA	Functional	100%	Approved Configuration Diagram & BOQ and FAT	Correct Operation of interconnected Devices of HMI system.	BHEL Quality Inspection Report.	2 1		1	
2.2	Hardware Functional Verification.	Physical arrangement, Wiring check & labeling, Continuity Checking, IR & HV test	MA	Visual/ Electrical	100%	Approved GA Drawing, Panel Wiring Diagram, IR & HV as per relevant International standard	Test Certification	BHEL Quality Inspection Report.	2 2		1	
2.3	Powering Up	Healthiness of all the modules/equipment, associated with Powering of PLC system	MA	Visual /Electrical	100%	Approved power supply scheme	All equipment to be healthy on power ON	BHEL Quality Inspection Report.	2 1		1	
2.4	Burn in test for PLC modules	Healthiness of PLC modules on Continuous Energisation, Temperature maintenance	MA	Visual/ Electrical	100% F	AT Procedure	Test certification as per FAT	BHEL Quality Inspection Report.	2 2		1	

LEGEND: * CR - Critical characteristics
 MA - Major characteristics
 MI - Minor characteristics

\$

P - Agency Performing the Test.
 W - Agency Witnessing the Test.
 V - Agency Verifying the Test.

1 - BHEL
 2 - Vendor
 3 - Sub-vendor

(बीएचएल एम)  PEM :: C&I		STANDARD QUALITY PLAN FOR PROGRAMMABLE LOGIC CONTROLLER						QUALITY PLAN NO.: PE-QP-999-145-I036__				
								VOLUME IIB				
								SECTION D				
								REV. NO. 01		DATE: 24.08.2007		
								SHEET 4		OF 8		
Sl. No.	Component / operation	Characteristics Checked	* Category	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records P	Agency \$			Remarks
										W	V	

3.0	Factory Acceptance Test (FAT)											
3.1	Input Output Functional Verification	I/O configuration, I/O operation	MA	Visual/ Eletrical	100%	FAT Procedure	AS per FAT	BHEL Quality Inspection Report.	2 1		1	
3.2	Processor Verification	Processor configuration, Powering up, standby operation (as applicable) and Loading	MA	Visual	100%	FAT Procedure	AS per FAT	BHEL Quality Inspection Report.	2 1		1	
3.3	Power Supply Module Verification	Redundancy Operation	MA	Electrical	100%	FAT Procedure	AS per FAT	BHEL Quality Inspection Report.	2 1		1	
3.4	Communication System Verification	Redundancy operation of Communication System, Measurement of Response Time, Communication with third party system	MA	Electrical	100%	FAT Procedure	AS per FAT	BHEL Quality Inspection Report.	2 1		1	
3.5	Diagnostic Verification	Self Diagnostic features of PLC system	MA	Visual	100%	FAT Procedure	AS per FAT	BHEL Quality Inspection Report.	2 1		1	
3.6	Control Panel/Desk Verification	Operation of PLC driven annunciation system, Mosaic, Push buttons & selector switches, Indicating lamps	MA	Visual	100%	FAT Procedure	AS per FAT	BHEL Quality Inspection Report.	2 1		1	
3.7	Software Verification	(i) Control Logics (ii) Engineering Features (iii) HMI Features	MA	Visual	100%	FAT Procedure	AS per FAT	BHEL Quality Inspection Report.	2 1		1	

LEGEND: * CR - Critical characteristics
 MA - Major characteristics
 MI - Minor characteristics

\$

P - Agency Performing the Test.
 W - Agency Witnessing the Test.
 V - Agency Verifying the Test.

1 - BHEL
 2 - Vendor
 3 - Sub-vendor

STANDARD QUALITY PLAN FOR PROGRAMMABLE LOGIC CONTROLLER

QUALITY PLAN NO.: PE-QP-999-145-I036__		
VOLUME IIB		
SECTION D		
REV. NO. 01	DATE: 24.08.2007	
SHEET 5	OF	8

THIS IS A PART OF TECHNICAL SPECIFICATION NO. PE-TS-412-155A-A001

FACTORY ACCEPTANCE TEST (FAT) PROCEDURE

This document covers procedure to conduct/witness PLC system functional tests in order to demonstrate conformity to purchase specifications and related engineering documents. The test shall be conducted at the system suppliers works. The system supplier shall conduct all functional tests before commencing FAT and test results shall be made available during FAT. Vendor must furnish following relevant drawings, duly approved by BHEL Engineering, for reference during FAT.

- a) Technical Specification of PLC.
- b) PLC System Configuration
- c) General Assembly Drawings.
- d) Panel Wiring Diagrams.
- e) Bill of Quantity for PLC System.
- f) Logic Diagram.
- g) HMI Schematics.
- h) Input / Output List.

Further the vendor shall furnish applicable product specification, datasheets, catalogues, test-certificates, and internal inspection records to enable FAT. Vendor shall also submit, [to the inspecting agency](#), his standard test procedure, for clauses given below; where vendor's standard practice has been referred.

APPLICABLE TEST PROCEDURE:

1. Input/Output Functional Verification.

Check for correctness of addressing of racks, slots and I/O modules as per applicable PLC configuration diagram. Appropriate signal generators shall be used to simulate Inputs and outputs to check operation and SCAN time. [Check online replacement of cards, processors, power supply etc.](#)

2. Processor Verification

PLC Configuration drawing to be referred for ascertaining

- i) Redundancy

STANDARD QUALITY PLAN FOR PROGRAMMABLE LOGIC CONTROLLER

QUALITY PLAN NO.: PE-QP-999-145-I036 ___		
VOLUME IIB		
SECTION D		
REV. NO. 00	DATE: 23.03.2005	
SHEET 6	OF	8

ii) Type (Hot or Cold)

Both the processors are to be checked for healthiness in case of redundant configuration as per vendor's standard practice. In case of hot redundancy, switchover of control from primary processor to standby processor shall be demonstrated for uninterrupted control and data processing as per vendor's standard practice. Switchover shall be witnessed, by manual power off or resetting the Primary CPU or simulating failure of primary processor. Checking should be by witnessing the lighting up of Processor's LEDs as per manufacturer's product standard.

Vendor shall demonstrate, as per Vendor's standard practice, adequate Loading (Spare Capacity) of Processors, as mentioned in contract specs. This shall be done, by simulating worst load operation of fully integrated PLC system.

3. Power Supply Module Verification

Check if PSM is in redundant mode as per specification. Check the healthiness of power supply from both the modules' lamp indication/measurement. Simulate failure of one PSM and verify that standby PSM has taken over without any interruption.

4. Communication System Verification

Communication system has to be in line with approved PLC Configuration Diagram. Verify that both the communication buses are intact and connected. Communication between PLC processors, I/O rack, OWS etc. is to be checked through simulation of input data. Simulate the bus failure by disconnection of working bus. Check that the communication continues without interruption or loss of data.

Following response times are to be demonstrated as per vendor's standard practice for conformance to contract specifications:

1. Screen update time
2. I/O scan time
3. SOE resolution time
4. Data transfer time with third party system using Communication Protocol as per Contract specification and as per quantum of data as per approved signal exchange list.

5. Diagnostic Verification

Product Catalogue/Literature shall be referred for checking of all diagnostic features. Hardware failure to be simulated by removing an I/O

STANDARD QUALITY PLAN FOR PROGRAMMABLE LOGIC CONTROLLER

QUALITY PLAN NO.: PE-QP-999-145-I036 ___			
VOLUME IIB			
SECTION D			
REV. NO. 00		DATE: 23.03.2005	
SHEET 7	OF	8	

6. Control Panel /Desk Verification

- i) PLC driven annunciation system should be checked by alarm signal simulation.
- ii) Push Button and selector switch operation should be checked by verification of corresponding change of status of Data Base point.
- iii) Indicating lamp / MIMIC should be checked by corresponding Data Base point simulation.

7. Software Verification

- i). Control Logics:– Software switches, lamps and Analog sources shall be used for simulation of field conditions .Control logics shall be checked for its correct functionality as per approved logic schemes
- ii). Engineering features:-
 - a) Online changing of parameters, set points.
 - b) Online modification in Control Logic Diagrams.
 - c) Online configuration of Graphics, Trends, Logs, HSR.
- iii). HMI features:-
Check for configuration & operation of Graphics, Trends, Logs, HSR and Alarms, in the form of Displays and Printouts, by simulation of Inputs as per approved documents.

8. Burn in Elevated Temperature test

Electronic equipments shall be subjected to Burn in elevated temperature test as per the procedure detailed below:

- a) (i) PLC modules are kept at 50 Deg c under continuous energized condition for 48 hours.

**STANDARD QUALITY PLAN
FOR
PROGRAMMABLE LOGIC CONTROLLER**


QUALITY PLAN NO.: PE-QP-999-145-I036		
VOLUME IIB		
SECTION D		
REV. NO. 00	DATE:	
23.03.2005		
SHEET 8	OF	8

ii) 48 hours test period shall be divided into 4 equal time segments of 12 hours duration each. For every 12 hours duration segment, after lapse of first 11 hours 110% of nominal voltage shall be applied to the panel under test for a period of 30 minutes followed by application of 90% of nominal voltage for the next 30 minutes.

b) Assembled Panels with complete wiring shall be kept under continuous energized condition for 120 hours at ambient temperature. Temperature rise in panels should be below 10 Deg C above ambient.

NOTES:

- 1) TABLE TOP OWS/OEWS SHALL BE OF LED 24" OR AVAILABLE INDUSTRY STANDARD.
- 2) PLC SYSTEM SHALL HAVE REDUNDANCY IN PROCESSOR, COMMUNICATION SYSTEM AND POWER SUPPLY.
- 3) UPS POWER SUPPLY SHALL BE PROVIDED FOR PLC PANEL(S), OWS/OEWS AND NETWORK COMPONENTS.
- 4) PLC PANEL SHALL HAVE PROVISION TO ACCEPT REDUNDANT TIME SYNC. SIGNAL (IRIG-B) FROM MASTER CLOCK SYSTEM (PLANT AREA).
- 5) PLC PANEL SHALL HAVE PROVISION FOR REDUNDANT DATA EXCHANGE (OPC) WITH PLANT DDCMIS.

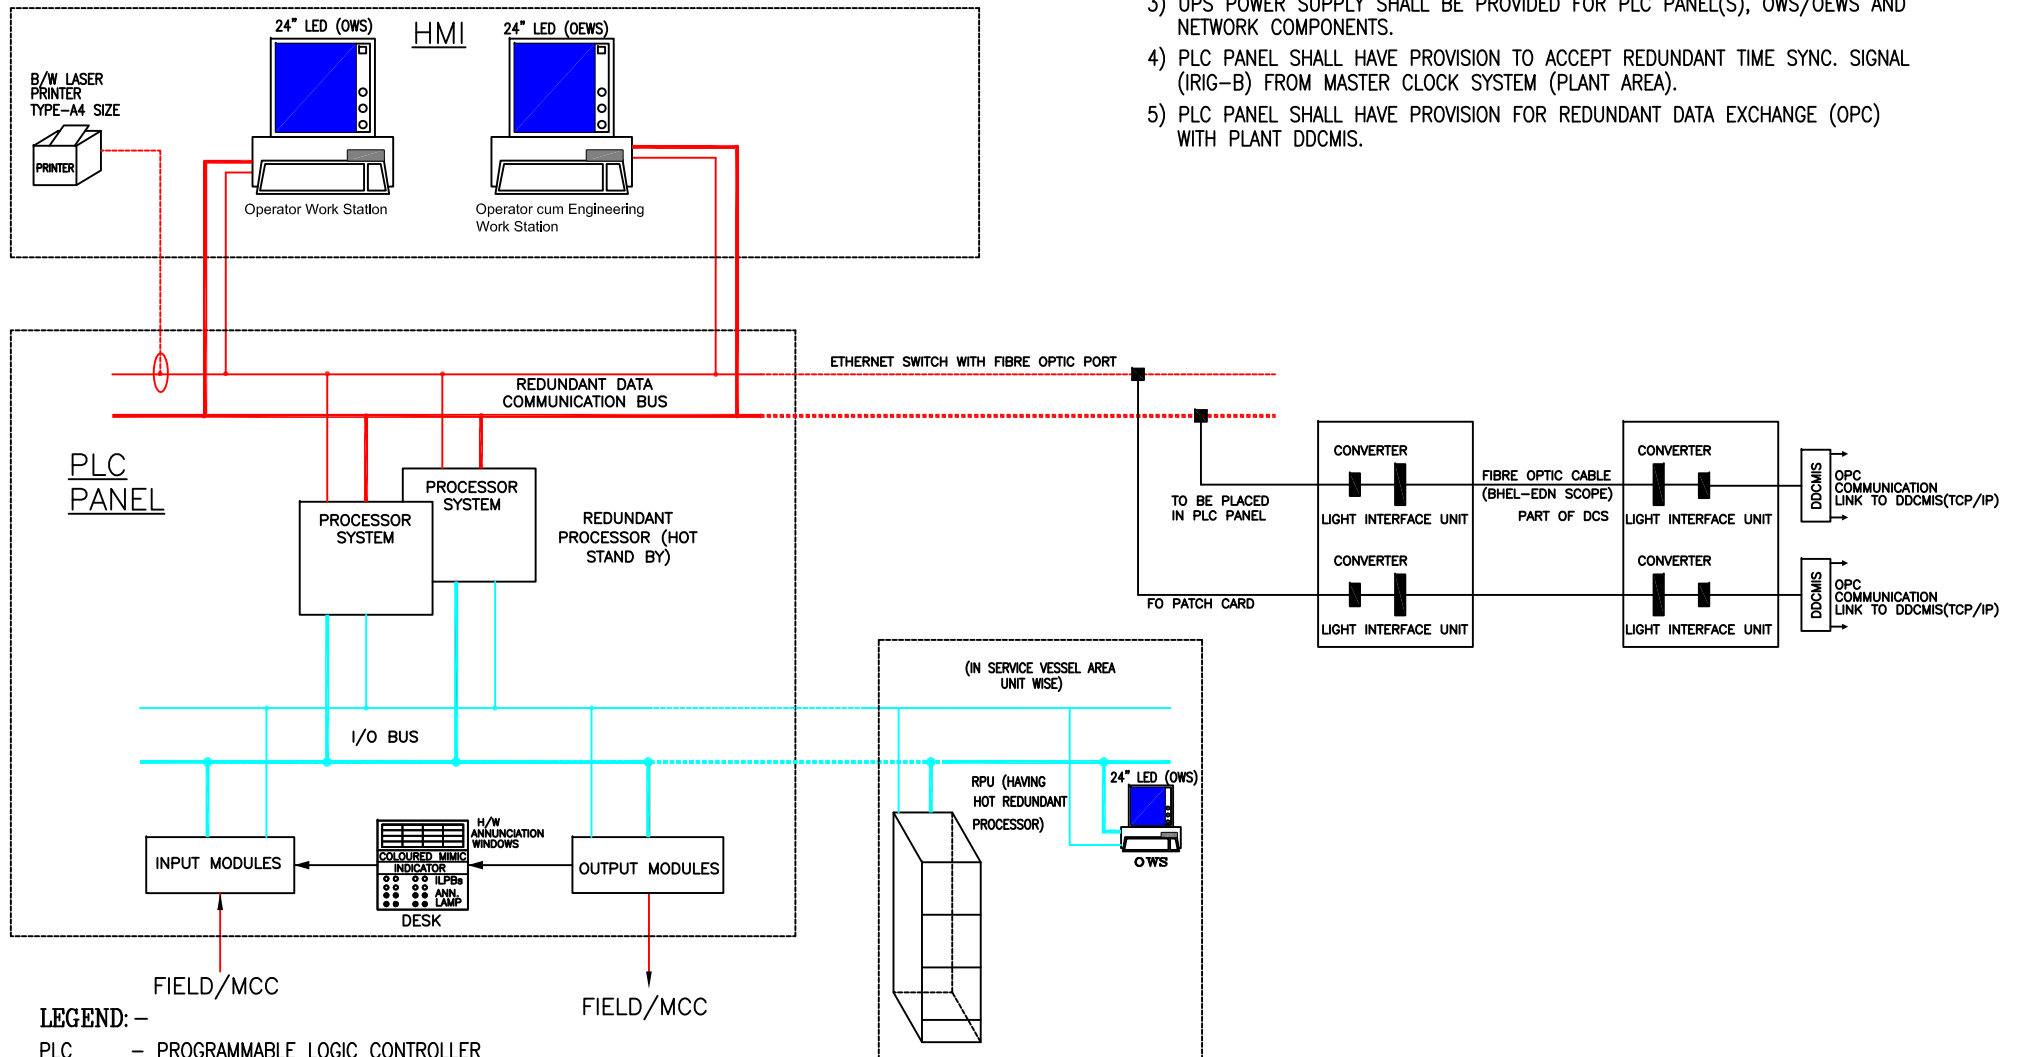

LEGEND:-

PLC	- PROGRAMMABLE LOGIC CONTROLLER
DDCMIS	- DISTRIBUTED DIGITAL CONTROL MONITORING & INFORMATION SYSTEM
UPS	- UNINTERRUPTED POWER SUPPLY
OEWS	- OPERATOR CUM ENGINEERING WORK STATION
HMI	- HUMAN MACHINE INTERFACE
NTP	- NETWORK TIME PROTOCOL
OPC	- OLE PROCESS CONTROL
MCCB	- MOULDED CASE CIRCUIT BREAKER
MCB	- MINIATURE CIRCUIT BREAKER




TITLE:-

PLC SYSTEM CONFIGURATION

CONDENSATE POLISHING UNIT

DRG. NO.	
REV. No.	DATE
SHEET	1

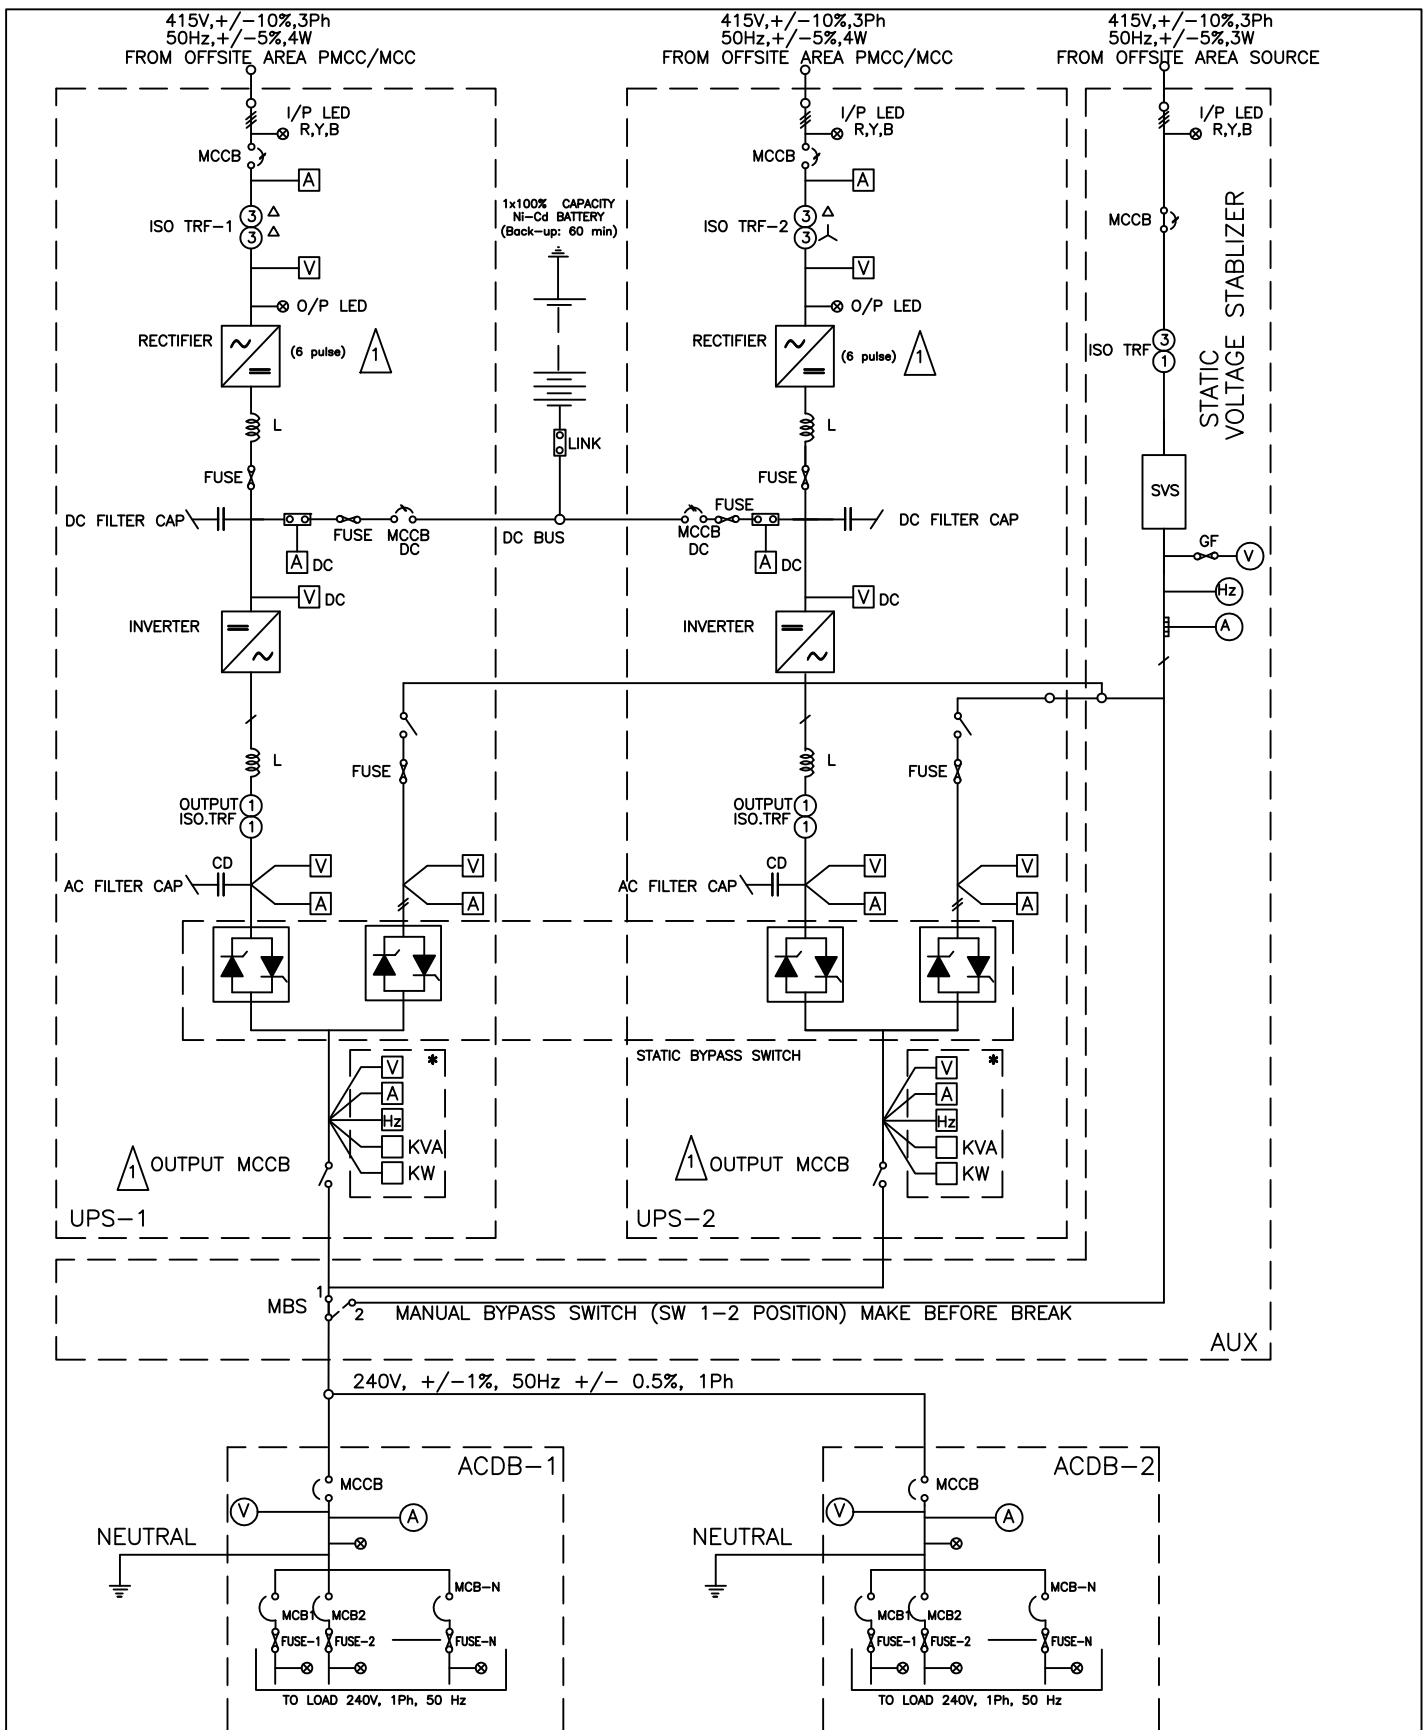

* V, A, Hz, KVA, KW READINGS/VALUES SHALL BE READY ON THE MIMIC DISPLAY PROVIDED ON THE UPS PANEL FRONT DOOR.



PROJECT:- 2 X 660 MW ENNORE SEZ STPP

TITLE:- UPS SCHEME
FOR OFFSITE

DRG. No.	PE-DG-412-145-I004		
REV. No.	01	DATE	23.05.2015
SHEET	3	OF	4

**F. SPECIFICATION
FOR
UN-INTERRUPTED
POWER
SUPPLY**

CHAPTER-7

UNINTERRUPTIBLE POWER SUPPLY SYSTEM & 24 V DC SYSTEMS

7.01.00 GENERAL REQUIREMENTS

- 7.01.01** This subsection covers design, construction and performance requirements of parallel redundant industrial grade Uninterruptible Power Supply (UPS) System & parallel redundant 24 V DC System to be furnished by the Bidder for BTG, Station C & I Package & BOP/offsite packages & any other control system/sub system specified elsewhere in the specification. The Bidder shall furnish separate parallel redundant industrial grade UPS System for each unit DCMIS/DCS Package and separate parallel redundant industrial grade UPS System for each BOP package including static inverters, static switches, manual bypass switch, chargers, A.C. Power distribution panels and Batteries with all required isolating and protecting devices and all other equipment and accessories required for completeness of this system. Bidder to note that there will be no common component like in phase transformer (IPT), common power supply to any redundant component and common point of failure in the UPS & 24 V DC system.
- 7.01.02** The requirements of UPS system & 24 V DC system are specified herein on system basis. The Bidder shall be responsible for engineering and furnishing a complete and operational system fully meeting the intent and requirements of this specification and Owner approved drawings.
- 7.01.03** The equipment furnished under this subsection shall meet the requirements of all applicable codes and standards including ANSI, NEMA, IEEE, NEC and IS.
- 7.01.04** The UPS System & 24 V DC system hardware shall be from the latest established product range of a qualified manufacturer. The Bidder shall furnish documents to satisfy the owner that the design, performance and high availability of the proposed UPS System, 24 V DC system and all system components have been established by a considerable record of successful operation in utility power station for similar application. All UPS system & 24 V DC system cabinets, enclosures and distribution boards shall be manufactured, assembled, wired and fully tested as a complete assembly as per the requirements of this specification in the manufacturing works of a qualified manufacturer prior to shipment to the project site. Class of insulation of wound components (All transformers, chokes/inductances etc.) shall be class H with temp rating up to class B.
- 7.01.05** The UPS, 24 V DC system equipment and the complete system shall have surge withstanding capability (SWC) to meet the requirements of ANSI C 37.90a – IEEE Standard 472 –1974. UPS & 24 V DC charger system should be provided with Class C type surge protection device. The Class C type surge arrester should be single MOV type, pluggable, should have fault indication and should be tested as per IEC 61643-1 to withstand 40KA 8/20 μ s pulse. The arresters should have potential free contact to ensure maintainability.
- 7.01.06** All non-interrupting components of UPS system & 24 V DC systems shall be capable of withstanding all available short circuit current without damage. Additionally, all circuit interrupting components shall be capable of withstanding and interrupting all encountered short circuit currents without damage.

7.01.07 All control and instrument circuits shall be fused. Fuses shall be mounted inside the enclosures and shall have easy accessibility. Fuses shall be Bussman low-peak type or Owner approved equivalent. All load fuses shall be to Owner's approval equal. The Bidder shall co-ordinate all load and line fuses applications to ensure that load fuses operate properly.

7.01.08 The bidder shall be responsible for ensuring that UPS System, 24 V DC system and the downstream power distribution system for equipment to be serviced by are coordinated such that UPS loads continue to operate without interruption and in accordance with the power supply tolerance requirements (both voltage and frequency) for these UPS loads as long as at least one source is within the limits of voltage and frequency as specified herein. The Bidder shall furnish single line diagrams with his proposal to demonstrate how this requirement is met for all equipment and system covered under Bidders scope.

7.01.09 The UPS system & 24 V DC System shall be installed in AC room.

7.01.10 Acoustic noise at rated linear load shall be < 75 dBA at 1 meter distance from UPS as per ISO 3746.

7.02.00 FUNCTIONAL REQUIREMENTS OF UPS

7.02.01 CAPACITY OF UPS SYSTEM FOR main plant PACKAGE, remote I/O panels and BOP/OFF-SITE PACKAGES

Parallel redundant UPS shall be sized by the bidder to cater to power for the bidder furnished loads such as plant control, monitoring system. Min. capacity shall be considered as 150 KVA (or as per system requirement in case capacity is higher than 150 KVA) at 50 deg. C ambient. All microprocessor based system, I/o cards, digital equipments, operating stations, printers, peripherals, receiver instruments, S WAS, CEMS, LVS, HMS, TSI, VMS, PADO, C&I Lab, Operator training Simulator system and other devices mounted in supervisory control desk, control panels and other microprocessor based system for BTG shall be operated on UPS power.

Each individual parallel redundant UPS shall be designed considering 20 % design margin over and above any capacity mentioned in specification; UPS sizing calculation shall be submitted for approval. While computing the base capacity of the UPS, inrush requirements of connected loads shall be duly considered. The inrush shall be taken as 300% of steady state load lasting for 100 milli seconds. The base capacity shall be computed by bidder on above basis and to provide for at least 10% variation to cater to changed load requirements during detailed engineering stage. Bidder shall detail in the technical bid, the steady state as well as inrush requirements of each of the loads furnished by him and justify the selection of UPS capacity duly satisfying the requirement of 20% design margin.

This base capacity shall be guaranteed at 240 V AC, 50 Hz single phase output at 50 deg. C & 95 % RH – non condensing at ambient conditions. Ratings other than standard ratings of the manufacture shall not be acceptable. Number of distribution feeders in completely redundant configuration shall be offered to suit the load distribution as decided during engineering. Spare feeders of at least 20% of the total number of feeders with 2 nos. minimum spare feeder of each rating shall be built in.

Separate industrial grade parallel redundant UPS system for each set of Remote I/Os cum processor panel of DDCMIS and each BOP/Offsite package & any other control system/sub system specified elsewhere in the specification, shall be provided of suitable capacity with similar features as of main plant UPS by the bidder. UPS system for remote I/Os panels and BOP/Offsite package & any other control system/sub system specified elsewhere in the specification shall be kept in the respective package UPS rooms.

UPS sizing calculation shall also be submitted for approval for each system/package. Diversity factor shall be considered as 1 for calculating the UPS capacity.

7.02.02 The parallel redundant Uninterruptible Power Supply (UPS) system of continuous duty shall supply, regulated, filtered and uninterruptible 240 V, 50 Hz, single phase power, within specified tolerances, to system AC loads, UCB mounted monitoring system, and other critical loads. Each of these critical loads shall receive one feeder from the AC Distribution Board of Inverter-"A" and another feeder from the AC Distribution Board of Inverter-"B". However, each inverter shall supply only 50% loads under normal conditions as indicated below. SLD of UPS as per NIT drawing # 114-17-0100 shall also be referred by bidder.

7.02.03 All necessary equipment required for protecting UPS equipment and connected inputs and outputs shall be furnished by the Bidder as an integral part of this system. Complete UPS system shall be automatic without any manual interference at any time of operation.

7.02.04 True, 100 % parallel redundant configuration also means availability of "Criss-Cross Redundancy". Hence The UPS system design shall ensure that in case of one of the charger failure, the other healthy charger, shall feed to one of or both the inverters as the case may be and continue to charge the common/individual DC battery banks at all load conditions. UPS system shall work in "Criss-Cross Redundancy" configuration to safeguard the battery bank from unnecessary drainage. The bidder should note that this situation should not in any way lead to the discharge of the DC battery and maintain the UPS power supply to all loads.

7.02.05 The industrial grade UPS system for BTG & for each individual BOP package shall include the following equipment:

Sr. No.	Descriptions	Quantities for UPS of main plant Package	Quantities for UPS for each remote I/O panel & BOP package
1.	100% capacity of IGBT based PWM Inverter with output Voltage, current, frequency, KVA & KW digital display/meter.	2 nos.	2 nos.
2.	100% capacity static switches with input Voltage, current, frequency digital display/meter at bypass line.	(As required) 2 no. (Min)	(As required) 2 no. (Min)
3.	Manual by-pass switch	1 no.	1no.
4.	100% capacity of 12	2 nos.	-

	pulse controlled floats-cum-boast Chargers		
5.	100% capacity of 6 pulse controlled floats-cum-boast Chargers	-	2 nos.
6.	100% Battery Set each	2 set (each For 2 hour back-up)	1 set (For 1 hour back-up) in case of UPS rating less than 15 KVA. 2 sets (For 1 hour back-up) in case of UPS rating more than 15 KVA.
7.	Step-down transformer (415 V, three phase , to 240V, single phase) of required capacity)	1 no.	1 no.
8.	Static Voltage Stabilizer with input & output ON Red indication and input & output Voltage, current, frequency digital display/meter.	1 set	1set
9.	Input isolation transformer with input & output ON red indication and input Voltage, current, frequency digital display/meter. Output isolation transformer	1 no. each	1 no. each
10.	A.C. Power Distribution Panels (including 20 % spare feeders on each panel with 2 nos. minimum spare feeder of each rating) and digital type Ammeter, Voltmeter, Frequency meter, P F meter, Watt meter & VA meter	2 sets (Quantities of feeders shall be as on required basis).	2 sets (Quantities of feeders shall be as on required basis).
11.	Interconnecting Armored FRLS ST2 (inner & outer sheath), PVC type C insulated stranded Copper conductor power Cable between UPS equipment & battery, UPS & ACDB, AC DB & loads. For emergency trip push	As required	As required

	buttons, Fire alarm system, safety critical circuit, trip protection circuit and for other services specified elsewhere in the specification shall be fire survival power cable conforming to IEC 60331, BS6387 (CWZ), BS6207 standard and this specification.		
12.	MCCB (At input, output, battery side, Bypass side, ACDB side etc) and tie breaker with ON, OFF & Trip indication.	1 no. each	1 no. each
13.	Online Battery Health Monitoring System	1 set	1 set
14.	Battery Junction Boxes with MCCB, Voltmeter & Current meter.	1 set each	1 set each
Any other equipment necessary for completion of the system shall be provided by bidder.			

All equipment, enclosures and accessories for UPS system shall be designed, arranged assembled and connected in accordance with the requirements of this specification.

7.02.06

NORMAL OPERATION

Two inverters each of 100% capacity, two battery packs of 100% capacity and two 100% battery chargers are used for main plant UPS. Two inverters each of 100% capacity, one battery packs of 100% capacity and two 100% battery chargers are used for BOP packages UPS.

- During normal operation, UPS loads shall be supplied by both 100% capacity inverters each working at 50% load. The inverters shall receive power from DC source (Charger / Battery), their static switches shall be in the respective "Inverter" position and the manual by-pass switch shall be in "Position-2". In this mode the two inverters shall act as standby for each other.

Necessary paralleling networks shall be included to ensure equal load sharing by both inverters. Load sharing network details shall be detailed to establish all functionalities including fuse clearance. Capabilities of the UPS System as well as each 100% rated inverters are fully satisfied. In addition to UPS output paralleling, Rectifier DC outputs shall also be properly paralleled.

- One inverter will act as "Master", working on its internal oscillator and the other inverter will follow by using the synchronizing signal from master inverter for automatic control of its output frequency.

7.02.07

EMERGENCY OPERATION

The static transfer switches and the manual by-pass switch shall provide switching means during emergency operation as follows:

1. In case of failure of any inverter the static switch shall automatically transfer the UPS Loads of faulty inverter (say Inverter – “A”) to the healthy Inverter-“B” which will start working at 100% capacity. Thus the feeding of UPS power is continued automatically to all load connected to both inverters despite power supply to all UPS loads connected to both inverters shall be maintained without interruption. Isolation of faulty inverter shall be automatic and achieved in less than 4 milli seconds.
2. Based on inverter failure alarm, the operator will transfer manual by-pass switch to “Position-1” bringing in the plant AC source as the standby source to healthy Inverter –“B” now working at 100% capacity. In this mode the healthy Inverter-“B” shall get the synchronizing signal from the stand by-AC source and automatic synchronization, operation on internal oscillator and transfer / retransfer to standby source shall be as follows:
 - i) The output frequency of the concerned inverter shall be automatically synchronized with the plant stand-by source by using synchronizing signal from the standby source. The frequency limits for this synchronism are specified in clause 7.03.05. If the frequency of the standby source is beyond these limits, the Inverter frequency control shall be automatically disconnected from stand-by synchronizing signal and the inverter shall maintain the output frequency at 50 H z within ± 0.1 per cent under all conditions of load and input voltage by working on their own internal oscillators.
 - ii) During operation on its own internal oscillator, the inverters shall continuously monitor the frequency of standby source. Upon restoration of proper frequency conditions of stand-by source, the inverter shall automatically start using stand-by source frequency as the synchronizing signal for inverter output frequency control.
 - iii) During the operation of any inverter on its internal oscillator due to synchronising frequency being beyond the specified limits, the transfer of static switch from “Inverter” to “Standby” shall be inhibited.
3. During any fault in the branch circuit feeders or inverter output bus, the inverter shall be capable of clearing a fast acting fuse of largest rating in 4 milliseconds and simultaneously provide UPS power to all connected loads (i.e. 50% capacity). In view of the above fault clearing capability of each inverter and due to availability of plant AC source as standby source for inverters the static switches shall not transfer the loads to the other inverter for fault clearing purposes.
4. Retransfer of static switch shall be manual in all cases and shall be accomplished only after synchronism of the inverter output with the stand-by source has been automatically accomplished.

5. The manual by pass switch shall have the provision (position –4) for fully bypassing the UPS system and connecting all UPS loads to the standby AC source. This provision may be used during start up to limit the inrush current and at other occasions at the option of the operator.

7.03.00 STATIC INVERTERS AND AUXILIARY EQUIPMENT

7.03.01 The static inverters shall be solid state type using proven IGBT based pulse width modulation (PWM) to convert direct current power to essentially sinusoidal alternating current power as per this specification. The inverter equipment shall include all necessary circuitry and devices to conform to requirements like voltage regulation, current limiting, wave shaping, transient recovery, surge suppression network, automatic synchronization etc. as specified herein.

7.03.02 INVERTER CAPACITY

Each static inverter shall have the following minimum capabilities without causing any damage to the components and with current limit not operation :-

- 1) Continuous full load rating
- 2) Over load capacity: 125% of full load rating as above for 10 minutes, 150% for 1 minute, 200% for 10 seconds minimum & 300% for 4 msec for all specified input voltages.
- 3) Fuse clearing capacity : Upon a fault in any branch circuit lateral feeder, the inverter shall have the capacity to carry a load equal to one half of its full load rating plus it shall clear the largest rated fast acting fuse in 4 milliseconds or less. All fuses used in inverter power and control circuit shall be fast acting type operating in less than 5 millisecond and each of these fuses shall be provided with kick fuse and alarm contact. Indication and alarm shall be provided to enable fault location.
- 4) Step load pick up: Upon transfer of full load, the inverter output voltage shall not drop below 85% of nominal voltage during the first half cycle after transfer and 90% of nominal voltage in the next half cycle. The recovery to within $\pm 1\%$ of voltage shall be in less than 50 milliseconds.
- 5) The inverter shall have sufficient I²t capacity to clear a slow acting HRC fuse having a continuous current rating equal to at least 20% of the continuous full load current rating of the inveter, while feeding 100% rated loads of the inverter.

7.03.03 INPUT VOLTAGE

The inverters shall be fed from a DC Battery and chargers which do not feed any other loads. Input voltage shall be nominal DC output voltage of battery and charger of range from final voltage after discharge of battery to maximum DC bus voltage during equalize charging of battery. The inverter shall also be capable of working satisfactorily meeting the specification requirements with only the chargers connected to its input without battery in circuit. DC input window of each inverter shall be either 315-434 or 320-450 V

DC. Filtering on the input of the inverters shall be furnished is required to operate within the output ripple of the chargers furnished by the Bidder. Each inverter shall include equipment necessary to protect itself from damage resulting from excursions, loss, or restoration of DC input voltage and synchronising voltage. The inverter output voltage shall be 230 V AC , 50 Hz, Single phase.

7.03.04

OVER LOADS, SHORT CIRCUITS AND LOAD LOSS PROTECTION

1. The inverters shall be provided with suitable fuses at the input and output which will permit proper co-ordination with other protective devices and at the same time protect the inverter against damage due to internal faults. All necessary equipment shall be provided to protect the inverters against over loads, short circuits and 100% loss of load. The inverter shall be self protecting against damage if energized with full load connected.
2. The inverter shall be provided with current limiting circuitry which will limit the output current to a value which will not damage the inverter or blow its fuses.
3. The inverter shall have sufficient $I^2 t$ capability to prevent damage to itself until short circuit conditions on the output are cleared.
4. Each inverter shall be capable of operation with nonlinear loads. For bidder loads bidder shall detail the nature of non linearity. For loads provided by owner, bidder may assume a nonlinear waveform with a current crest factor of 3.0 occurring coincident with voltage peak. With nonlinearity consisting of third, fifth and seventh order harmonics. Output waveform of the inverter(s) shall remain within specified limits when operating with nonlinear loads at 100 per cent rated load.
5. The inverters shall be self protecting against all AC and DC transients, voltage surges and steady state abnormal voltages and current likely to be encountered in utility power station.

7.03.05

Automatic Synchronisation

Inverter equipment shall include stable solid state oscillator devices designed to automatically maintain the inverter output in phase and in synchronization with the standby AC source. The frequency regulation shall be automatic within ± 0.1 Hz of all conditions of inputs, loads and temperature occurring simultaneously or in any combination.

Facility shall be provided for automatic transfer to internal oscillator operation when the standby source frequency is not within the synchronization limits.

Provision shall be made for step less adjustment of synch disconnect frequency range from 50 Hz +/- 0.5 Hz to 50 Hz +/- 2 Hz.

Automatic adjustment of phase relationship between inverter output and standby AC source shall be gradual, at a controlled slew rate, which shall not exceed 0.1 Hz per second.

The inverter shall normally work on the internal oscillator with either of the two inverters as master synchronizer and the other following it. Suitable selector facility shall be provided to select the master. When any one inverter fails the healthy inverter gets the synchronizing signal from the standby AC source.

The DC input current shall never exceed the full load current except for a short circuit within the inverter. The limitation applies to transient as well as steady state currents and includes inrush currents upto initial energisation of the UPS, load energisation, short circuits external to the inverter etc. For any value of the load and load power factor drawn by the equipment served, the inverter shall not impose on DC source any voltage oscillations in excess of 5 volts (RMS total, all frequencies) or any current oscillations in excess of 3 % (RMS total, all frequencies) of the DC current at full load.

7.03.06

The inverter shall meet the following specifications in addition to other requirements stated herein :-

1. Voltage input (Battery output) : As per system requirement
2. Nominal voltage output: 240V, 50Hz, single phase
3. Inverter capacity (output KVA) : As per clause 7.03.02
4. Voltage regulation :
 - a) Steady state (0-100% load at all input voltages & all power factors) : $\pm 1\%$
 - b) Transient voltage regulation (on application or removal of 100% load) : $\pm 5\%$
 - c) Time to recover from transient to normal voltage with $\pm 1\%$ of steady state (on application or removal of 100% load) : <50 milli second
5. Wave Form
 - a) Nominal Frequency : 50 Hz
 - b) Frequency regulation for all conditions of input supplies, loads and temperature occurring simultaneously or in any combination (automatically controlled) : $\pm 0.1\text{Hz}$

- c) Synchronization : 48 Hz to 52 Hz
limits (for maintenance & synchronism between the inverter and standby AC source). (factory test)
 - d) Field adjustment : 50 ± 0.5 Hz
range for (c) to 50 ± 2 Hz
above
 - e) Total harmonic content : <4% max.
 - f) Harmonic content : <2.5%
max.for any single harmonic
6. Rated output current at rated output voltage with current limit not operating :
 - a) Current : 200%
 - b) Duration : 10 seconds
7. Overload capacity at 100% voltage :
 - a) For 4 ms (fuse clearing): App. 300%
 - b) For 10 seconds : 200%
 - c) For 10 minutes : 125%
 - d) The proposed inverter has : ---
the capacity to clear largest acting fuse in 5 milli second & without entering into current limiting mode
8. Efficiency (watt output/watt input)
 - a) at 100% load 1.0 P.F. / 0.8 P.F: >91%/ 91%
 - b) at 75% load 1.0. P.F. / 0.8 P.F. : >90% / 90%
 - c) at 50% load 1.0 P.F. / 0.8 P.F. : >89% /89 %
9. Duty : Continuous
10. Cooling : Natural convection or forced cooling using redundant fans.

Equipment to be designed for operation with full load even without cooling availability.
11. Ambient temperature : 50 deg C, maximum
12. SCR derating from : 50%

peak voltage and peak ratings.

7.03.06

STATIC INVERTER AUXILIARY EQUIPMENT

In addition to the inverter equipment specified above, auxiliary equipment shall be furnished with each static inverter as follows:

- 1) Equipment and material furnished, mounted and wired on the front panel of the inverter enclosures :

<u>ITEM</u>	<u>QUANTITY</u>
Output ammeter, AC, indicating, Scale-0 to 150 percent of rated continuous full load inverter output current, 1 percent accuracy.	1
Output voltmeter, AC, indicating 0-300 volt scale, 1 percent accuracy.	1
Output KVA, AC indicating scale 0-150 percent of Rated capacity, 1 percent accuracy.	1
Input voltmeter DC, indicating 0-300 volts scale, 1 percent accuracy.	1
Frequency meter, 45-55 hertz, 1 percent accuracy.	1
Power factor meter, (0-1. 0-0), 1 percent accuracy	
Inverter ON-OFF switch	1
Alarm Reset Push Button	1

- 2) Indicating lights listed below with proper actuating devices, circuitry and legend shall be furnished on front of the Ups panels. For these abnormal conditions which could be of a momentary nature, the indicating lights shall remain energized and the contact remain closed until cleared by a reset push button furnished on the panel. The indicating lights shall be of make subject to Owner's approval.

The following indications shall be provided as a minimum :

- a) DC voltage to the Inverter - Low
- b) DC voltage to the Inverter - High
- c) Loss of DC input to the inverter
- d) Inverter output voltage - High
- e) Inverter output voltage - Low (after a time delay to avoid unnecessary alarm due to low voltage on load in rush etc.)
- f) Inverter A failure / Inverter B failure
- g) Standby AC source failure
- h) Inverter A / Inverter B not synchronized with AC source
- i) Automatic transfer to AC source. Blown Fuse or Tripped Breaker.
- j) Inverter A/ Inverter B feeding 100% UPS Load
- k) Standby source feeding 100% UPS loads
- l) Redundant fan failure and temperature high (if provided)

7.04.00

STATIC TRANSFER SWITCHES AND AUXILIARY EQUIPMENT

7.04.01 The static transfer switches shall be provided to perform the following functions

- 1) To transfer the load automatically without any break between the inverter to the standby inverter as required to maintain the continuity of power supply to UPS connection loads. The load shall be automatically transferred from "Inverter" to the inverter source upon any malfunction of one inverter.
- 2) To transfer UPS load under manual control from standby AC source to inverter when placing the UPS System in service and from inverter to standby AC source when taking the UPS out of service.

7.04.02 The static transfer switches shall have two modes of operation namely automatic and manual.

7.04.03 The static transfer switches shall use silicon controlled rectifiers and other static devices required for automatic transfer of load from "Inverter" to Standby" source and vice versa.

The static switches shall conform to the requirements specified herein including the following:

1. Capacity (continuous) : Equal to the continuous full load capacity of the inverter.
2. Capacity (overload) : 200% for 10 seconds, 150% of continuous for 60 seconds and 125% of continuous rating for 10 minutes and 300% of continuous rating for 4 msec.
3. Capacity (Peak) : 1000 % of continuous rating for 5 cycles.
4. Transfer Time : < 4 msec. The transition shall be "make before break", voltage failure shall be sensed at the output of the static switch.
5. Voltage Rating (Nominal) : 240 Volts, 50 Hz. Single phase.
6. Transient Voltage Tolerance : 340 Volts peak above the normal line voltage.
7. Ambient temperature : 50 deg C max.
8. Cooling : Natural or forced circulation , using redundant fans.
9. Duty : Continuous

7.04.05 **TRANSFER INITIATION**

- 1) The transfer of static switch from normal "Inverter" position to "Stand-by" position shall be initiated by one of the following causes :
 - a) Inverter failure and UPS System trouble
 - b) Inverter output voltage failure
 - c) Over current
 - d) Manual push button operation
 - e) Static Output voltage failure.
- 2) The UPS bus shall be monitored by two voltage detectors. One fast acting circuit shall be used for detecting a complete and instantaneous, voltage loss while the other slower acting averaging circuit with adjustable trip level shall be employed to detect voltage deviation beyond selected limits. Both voltage detector circuits shall automatically initiate operation of static transfer switch.

- 3) The static switch shall automatically transfer the load from inverter to stand-by AC source when the maximum I^2t capability of the inverter is reached when the inverter output voltage drops below 90%.
- 4) UPS bus current shall be continuously monitored by a current monitoring detector. This detector shall operate the static transfer switch when the load current exceeds the overload rating of any inverter. The detector shall reset when the load current falls below the rated current of the inverter resulting in retransfer of static switch with inverter position.
- 5) Over current transfer limit shall be continuously adjustable from inverter continuous rating to inverter current limit rating.

7.04.06 TRANSFER INHIBIT

The transfer of static switch shall be inhibited under the following conditions:

- 1) Automatic or manual transfer of load from inverter to stand-by AC source or vice versa, shall be inhibited when the inverter frequency is not synchronized to the alternative source.
- 2) Transfer resulting from overload shall be inhibited when the standby AC source is not available. In this case the load fed by the inverter shall be automatically disconnected

7.04.07 RETRANSFER TO NORMAL

- 1) The retransfer to normal shall be manual in all cases.
- 2) Manual transfers shall be initiated by push button actuation.

7.04.08 Static transfer switches shall be provided with necessary protective devices (circuit breakers / current limiting fuses) both in "Normal" as well as "Stand-by" position.

7.04.09 The static transfer switches shall be provided duly mounted and wired in enclosures furnished by the bidder.

7.04.10 The static switches shall be furnished with contacts to alarm failure of the alternate source or opening of any fuse protecting the static switches.

7.05.00 MANUAL BY-PASS SWITCH

7.05.01 The manual by-pass switch will be used to isolate any static switch from its load and stand-by power supply and to take the static switch out of service without power interruption to the load. In doing so the manual by-pass switch shall connect both load buses to a single inverter. The manual by-pass switch shall also provide the facility for by-passing the entire UPS system during start up at the option of the operator.

7.05.02 The manual bypass switch shall have make before break contacts to ensure continuous supply to UPS loads during the operation of this by-pass switch.

- 7.05.03** The manual by-pass switch shall be rated for 600 Volts, 50 Hz, single phase operation. It shall have continuous load carrying capacity equal to full load inverter current and necessary short term load carrying and interrupting capacity to meet the requirements of the UPS system.
- 7.05.04** All other by-pass and disconnect devices shall be provided by the Bidder as required for orderly start up and shut down and maintenance of UPS system and system components.
- 7.05.05** The Bidder shall provide potential free contacts, one closed in each position, for use in DDCMIS & PLC system.
- 7.05.06** The manual by-pass switch and required disconnect devices shall be furnished duly mounted and wired in enclosure, furnished by the Bidder.

7.06.00 FLOAT-CUM-BOOST CHARGERS AND AUXILIARY EQUIPMENT

Two no. 100 % capacity SCR based fully controlled 12 pulse float cum boost chargers shall be furnished for main BTG UPS system and Two no. 100% capacity SCR based fully controlled 6 pulse float cum boost chargers shall be furnished for BOP packages UPS system. Each charger shall confirm to the following requirements.

7.06.01 CHARGER CAPACITY

Each charger furnished for UPS system shall be adequately rated to ensure that any one shall meet full DC load of UP system operating at 100% rating plus recharge the fully discharged UPS battery within 8 hours.

The Bidder shall furnish the charger rating calculations to the Owner to satisfy that this requirement is met. The charger shall be furnished as per rating approved by the Owner during engineering stage.

- 7.06.02** The chargers shall be supplied from a 415 volt, 50 H z. 3 phase system. The chargers shall maintain the output voltage within plus and minus 0.5 percent from no load to full load with an input power supply deviation in voltage level of plus or minus 10 percent and input power supply deviation in frequency of plus or minus 5 percent and with both deviations present in any combination.
- 7.06.03** In addition to supplying DC power for inverters, the chargers shall be designed to charge a fully discharged battery without over loading or causing over voltage or without causing interrupting operation of AC or DC circuit breakers for the entire range of intended operating regimes. Suitable solid state electronic circuits shall be provided to ensure that the charging current is voltage regulated and current limited. After the battery is recharged the charger shall maintain the battery at full charge until the next emergency operation when the UPS battery is again required to provide DC power.
- 7.06.04** Float and equalizing controls shall have an adjustment range of $\pm 5\%$ continuous (without steps).

- 7.06.05** The chargers shall be self-regulating, solid state, silicon controlled, full-wave rectifier type designed for single and parallel operation with the battery specified under clause 7.07.00. The chargers shall be designed for automatic load sharing during parallel operation.
- 7.06.06** The charger shall be current limited at 125% of full load to reduce output voltage for charger circuit protection and for protection of battery from overcharge. The current limit shall be continuously adjustable from 80% to 125%.
- 7.06.07** All necessary equipment and devices shall be provided to protect the charger from short circuits, transient voltage surges, load and supply fluctuation including sudden loss of input or load.
- 7.06.08** The charger shall have a slow walk-in circuit which shall prevent application of full load DC current in less than 10 seconds after AC power is energized.
- 7.06.09** The minimum full load efficiency at nominal input and float output shall be 96 %. The output regulation, ripple content and power factor shall meet the requirements of UPS system as well as the inverters furnished by the Bidder as per clause 7.03.00.
- 7.06.10** Chargers and auxiliary equipment shall be mounted in free standing cabinets furnished by the Bidder. Charger cabinets shall be folded steel construction with top, front, back and sides fabricated from not less than 3 mm thick sheet steel. The cabinet front, back, end sides shall extend to the floor to present a finished appearance. Cabinet door shall be provided to permit easy access to all components for maintenance or replacement. Doors shall have concealed hinges and three-point latches. Louvers shall be provided for ventilation as required for operation at the specified ambient but the cabinet top shall be solid. All louver openings shall be covered with corrosion resistant fine screen coverings.

7.06.11 **GROUND DETECTOR SYSTEM**

- a) Each charger shall be furnished with a ground detector system consisting of a relay and a center tapped resistor. The resistor shall be connected between the positive bus and the negative bus.

The relay coil shall be connected between the centre tap of the resistor and ground. The relay shall be furnished with one normally open and one normally closed contact wired to terminal blocks for connection to external circuits.

7.06.12 **UPS Signal interfacing with DDCMIS/DCS & PLC**

- a) The bidder shall provide alarms and status indications, current, voltage, frequency, P F etc through serial link with MODBUS or another compatible protocol.
- b) The Bidder shall furnish 4-20 mA signals to DDCMIS/PLC for the following:
- i) Inverter A & B output voltages
 - ii) Inverter A & B output currents
 - iii) Inverter A&B output frequency

- c) List of alarms (min.) to DDCMIS through potential free contacts shall be as follows:-
- i. Rectifier – 1 Trip.
 - ii. Inverter – 1 Trip.
 - iii. UPS battery low.
 - iv. Rectifier – 2 Trip.
 - v. Inverter – 2 Trip.
 - vi. Load on static Bypass.
 - vii. Static Bypass failure
 - viii. ACDB – 1 Incomer Tripped.
 - ix. ACDB – 2 Incomer Tripped.
 - x. UPS – 1 Fan Tripped.
 - xi. UPS – 2 Fan Tripped.

7.07.00

UPS/24 V DC System BATTERY AND ACCESSORIES

The UPS/24 V DC system batteries shall be heavy duty *Ni-Cd* type as specified below:

- i. Expected service life is greater than 20 years when operated on float or trickle charge.
- ii. Low maintenance – minimal topping up frequency and self - discharge.
- iii. Capable of rapid recharging.
- iv. Transparent containers for ease of inspection and maintenance.
- v. Battery racks provided for battery shall be 2 tier made from heavy teak wood to bear 150% over load, anti acid paint etc.
- vi. One no. 2 sided Folding Aluminium ladder (height 180 cm) for maintenance & removal of battery cells and mounting bracket for ladder shall be provided by bidder with each battery set.

The batteries shall be **heavy duty Nickel-cadmium Fiber plated type** and shall be sized for an hour of full load operation during non-availability of AC supply / chargers. The Ni-Cd batteries shall conform to IS:10918. For sizing calculation, design margin of 120%, an aging factor of 0.8 and a temperature correction factor (Based on temperature characteristics curve to be submitted by the Bidder and at a temperature of 4 deg. C). Capacity factor shall be taken into consideration, and ambient temperature shall be considered as the electrolytic temperature. The sizing of the battery shall be as approved by Owner during detailed engineering. However, Bidder shall consider a suitable voltage drop from battery room to UPS and UPS to load, while sizing the battery. The system shall also be suitably designed to overcome any over voltage that may arise during low-load operation of the charger. The bidder shall clearly bring out in his offer how the same is being implemented.

The battery size shall be calculated taking UPS/24 V DC system capacities as base load. Bidder shall also consider voltage drop from battery room to UPS/24 V DC systems, while sizing the battery. For Plant UPS & plant 24 V DC system, battery back up time shall be 2 hours and for BOP packages UPS & BOP 24 V DC system, the back up time shall be for 1 hour.

For Fire alarm panels, batteries shall be provided with min. 10 hours backup.

7.07.01 In order to monitor the batteries, **online battery health monitoring system** shall be employed. It is a battery management system based on monitoring the voltage of individual battery cell, which provide the information/details about battery health status to end user/owner. Complete hardware like detector units, Battery clips, cables, monitor (power control unit) and other accessories etc as required to complete the system shall be provided by bidder. LED indication shall be provided on detector units for power, alarm and RUN indication etc. Data from Online Battery Health Monitoring System shall be communicate/transferred to DDCMIS for Monitoring and analysis using different protocol like RS485 Modbus/OPC etc.

7.07.02 One complete set of all accessories and devices required for maintenance and testing of batteries shall be supplied for each set of the batteries of each unit/plant auxiliary system. Each set include at least the following:

a)	Hydrometer	5 Nos
b)	Set of hydrometer syringes suitable for the vent holes in different cells	5 Nos
c)	Thermometer for measuring electrolyte temperature	5 Nos
d)	Specific gravity correction chart	5 Nos
e)	Wall mounting type holder made of teak wood for hydrometer & thermometer	5 Nos
f)	cell testing voltmeter(3-0-3 V)	5 Nos
g)	Alkali mixing jar	5 Nos
h)	Rubber aprons	5 Nos
i)	Pair of rubber gloves	5 Nos
j)	Set of spanners	5 Nos
k)	No smoking notice for each battery room	2 Nos
l)	Goggles (industrial)	5 Nos
m)	Instruction card	10 Nos
n)	Minimum and maximum temperature indicator for battery room	1 No.
o)	Cell lifting facility	1 Set
p)	Vent Caps	2 set
q)	Terminal Bolts & Washers	1 Set
r)	Plastic Filling Bottles	10 Nos.
s)	Alkali resistant funnel & Mugs	10 Nos.

7.07.03 Cell booster charger shall be provided with main plant UPS & 24 V DC batteries set to charge the new & sick cell for revival of cell. The cell booster shall be built in separate portable panel. Resistive load discharge bank shall also be provided with main plant UPS & 24 V DC batteries set to discharge the batteries in case of over charged batteries.

7.08.00 **VOLTAGE STATIC STABILISER**

7.08.01 One 415 Volt, 3 phase to 240 Volt, single phase transformer along with associated static voltage stabilizer shall be furnished with each UPS set.

This transformer and stabilizer combination shall convert 415 Volt $\pm$ 10% plant auxiliary AC supply to 240V $\pm$ 1% single phase standby AC Power which will serve as UPS system back up supply source.

7.08.02 The transformer and stabilizer shall be sized for 100 percent UPS load and shall coordinate with the largest branch circuit protection device for feeder short circuit current without sacrificing voltage regulation. The voltage stabilizer shall employ silicon solid state circuitry and shall maintain the specified output voltage for 0-100% load with input voltage variations as indicated above. Class of insulation of wound components like transformers etc shall be class H with temp rating up to class B.

7.08.03 The stabilizer shall meet the following characteristics as a minimum

- Fast rate of correction - within 5 cycles
- Output distortion - less than 5% under worst conditions
- Efficiency - better than 95%
- Overload Capacity – 300% for 200 mSec.

The make and rating shall be subjected to Owners approval.

7.10.00 AC & DC Power supply for BOP packages

7.10.01 The UPS system shall be separate for each BoP/offsite package. The UPS shall be designed as specified at clause no. 7.02.00 to 7.08.00.

7.10.02 Parallel redundant 240 V AC to 24 V DC convertor with 50% sharing & 125 % capacity shall be provided for 24 V DC power supply in each cubicle separately as per requirements for BOP/Offsite package's PLC control system and microprocessor based control system.

The UPS power supply shall be extended to Parallel redundant 240 V AC to 24 V DC convertor thru redundant UPS feeders.

AC to DC convertor shall be SMPS based and shall have wide range of AC/DC input voltage (85-264 V AC & 90-350 VDC). It shall have the necessary diagnostic functions like indications for DC OK, automatic overload monitoring etc. The MTBF for the power supplies shall not be less than 500,000 hours (in Accordance with (IEC – 1709) with operating temp. from –25deg. C to 70 deg. C.



7.11.00 CONSTRUCTIONAL FEATURES FOR CABINETS/ENCLOSURES

The Construction details for UPS & 24 V DC charger system cabinets/enclosure shall conform to the requirements indicated in chapter 6.

7.11.01 Grounding

Normal, AC power supply will be grounded at the source. For grounding other than this, I/P and O/P isolation transformers shall be furnished with the UPS.

7.11.02 All the transformers used anywhere in UPS & 24 V DC charger circuitry shall be copper wire wound with class H insulation.

7.12.00 DC DISTRIBUTION BOARD PANEL

7.12.01 Distribution board shall be furnished with components, devices and materials meeting the requirements specified herein.

7.12.02 Each DC distribution board shall be constructed for 2 wire DC distribution. All bus bars shall be of solid copper. Each panel shall have four double pole 800 amps MCCB and properly sized fuses for three incoming feeders (two from chargers and one from battery) and two double pole 800 amps Moulded case circuit breakers with thermal over current relays and electromagnetic over current relays for two outgoing feeders to inverters. Isolators and circuit breakers shall open and close with snap action. Fuses of appropriate capacity shall be provided for incoming feeder from battery. All switches, fuses, circuit breakers and buses shall be rated for DC system fault level, which shall be indicated by the bidder in his proposal. Circuit identification cards mounted in card holders shall be provided on the hinged panel board front. The number of feeders (WITH 20% spare feeders) and rating of each feeder shall be to suit the individual load keeping in view the fuse clearance capability of UPS system already stipulated and shall be as finalised during engineering. No price implication is admissible for the number ratings of feeders as decided during engineering and owners decision in this shall be final. Each feeder shall have fast acting semiconductor fuse, MCB & LED indication for ON status.

7.13.00 AC DISTRIBUTION BOARDS PANEL

7.13.01 Panel boards for distribution of continuous AC power to essential loads shall be dead-front type panel boards rated for 600/1100 V, AC service. The hinged panel board front shall cover the fuses and wiring gutter but not the switch handles. The hinged front and switch handles shall be covered by the enclosure door.

7.13.02 Each panel board shall be constructed for 2 wire, single-phase distribution with a solid neutral bar. Phase and neutral bars shall be of copper. Rating of the main lugs shall be equal to the rated continuous full load current of each inverter.

7.13.03 Each panel board shall have one fused disconnect switch & MCCB of adequate rating for incoming feeder for AC Bus and requisite double pole, suitably rated ampere fused, disconnect switch branch circuit devices (MCB). Fused switches shall be equipped with arc quenchers, visible blades, and quick-make quick-break operating mechanisms. Maximum size fuse which branch circuit fuse holders will accept shall be rated at 60 amperes. As each UPS fed load will be provided with two hot

redundant 100% rated feeders. Main feeders to ACDB shall be provided with digital type Ammeter, Voltmeter, Frequency meter, PF meter, Watt meter & VA meter. One from ACDB-A and other from ACDB-B, boards with feeders shall be constructed in line. The number of feeders (WITH 20% spare feeders) and rating of each feeder shall be to suit the individual load keeping in view the fuse clearance capability of UPS system already stipulated and shall be as finalised during engineering. No price implication is admissible for the number ratings of feeders as decided during engineering and owners decision in this shall be final. Each feeder shall have fast acting semi conductor fuse, MCB & LED indication for ON status.

G. SPECIFICATION FOR CONTROL PANELS

CHAPTER-6

SUPERVISORY CONTROL PANELS, SUPERVISORY CONTROL DESKS, EQUIPMENT PANELS

6.00.00 PANEL AND DESKS

6.01.00 GENERAL REQUIREMENTS

All DDCMIS/PLC/any other control system's electronic modules, power supply components, other control devices (except field mounted sensors/transmitters) and required for completeness of the system shall be housed in cabinets furnished by the Bidder. All equipment and dedicated cabinets required for termination, marshalling and proper interface within Bidder's system and also with other systems shall also be provided by the Bidder.

The cabinet mounted equipments shall be fully assembled, installed in mounting racks, wired and fully tested as per specification requirements and Owner approved drawings in the manufacturing works of a qualified manufacturer prior to shipment to the project site. The Bidder shall ensure that the cabinets are complete and ready for installation before dispatch from manufacturing works. The installation work at project site for these cabinets should only involve connections through multi pair cables from marshalling cabinets (wherever provided) to system cabinets and inter-cabinet/cabinet to UCD/UCP/BUP.

The Control cabinets shall house all types of modules / hardware to achieve all functions of Control System including signal conditioning modules, controller modules, I/O modules, communication controller modules, and all other requisite hardware for a complete system.

6.02.00 SUPERVISORY CONTROL PANELS AND DESKS

6.02.01 Control Desks & Other Furnitures

Supervisory control desks for DDCMIS and other systems shall be supplied for mounting the required operating station as specified elsewhere in the specification. Also control desk will be provided for balance work stations – located in computer room, supervisor room etc. All furniture including chairs and tables for printers etc. shall also be provided by the bidder.

Also control desk & complete furniture will be provided for work stations & printers – located in respective control room for BOP packages.

Industry standard Cushioned revolving, wheel, independently, adjustable seat and back chairs with provision for adjustment of height shall be provided for the operator & unit in charge & other personnel in central control room area & BOP's control rooms, simulator rooms, Conference room, meeting room, documentation room, staff room, CAAQMS shelters, CAAQMS room etc. These shall be designed for sitting for long duration such that these are comfortable for the back. The exact details shall be finalised & approved by Owner during detailed engg.

The actual nos., placement and profile of the main plant control room desk shall be decided during the detailed Engineering.

The tentative layout of central control desk, LVS & consoles are shown in the Drg. No. 114-05-0108, 0105 & 0111.

Control Desk for programmer's, Maintenance Engineer's, EWS, Serves, P C & diagnostic OWSs: -

Required numbers of control desks for accommodating programmer's/main-tenance engineer's/diagnostic etc shall be supplied. These shall preferably have the same dimension as that of supervisory control desks. Also required nos. of control desk will be provided for work stations & printers – located in respective control room for BOP packages.

Desks for accommodating printer:

Adequate number of table/desks/stands for accommodating printers in bidder's scope shall be supplied. Each printer shall be on a separate table / stand.

Care shall be taken to ensure ergonomically aspects so as to create ergonomically ideal work place considering physical aspects such as an average Indian person's size and reach, physiological aspects such as line of sight and field of vision and cognitive factors such as concentration and perceptivity. Extreme care shall be taken to design the desks with correct angles and dimensions.

Glass topped oak wood office table with lockable drawers shall be provided for Chief Engineer room and all other executive rooms.

6.02.02 Supervisory Panel Unit Control Panel

In addition to the LVS and OWS, a limited operation from backup unit control panel is envisaged for emergency operation and to provide safe shut down of plant. The Unit control panel shall house Conventional Push-button (ILPB) stations, Console inserts (for SG, TG & Generator like FSSS, HPBP, SADC, APRDS, ATRS, ATT, DEHC, LPBP etc), Trip Push Buttons, EWLI, Ammeters, chartless recorders, & min. 15 nos. programmable digital display units for Boiler, Turbine & Generator's parameters. The mosaic grid shall be heat resistant, flame retardant, self extinguishing, and shrinkage free, non reflecting type. Finish of mosaic grid shall be mat type without flaring. Hard wired emergency trip pushbuttons shall be arranged on operator station desk & in parallel on UCP.

Unit control Panel (UCP), shall be located suitably in the CCR.

In addition to above, 21 nos. Programmable digital display units common for both units showing total MW shall be provided by bidder at different locations of plant. The data to this DDU will be fed from DDCMIS through MOD BUS/PROFI BUS /RS 485 protocol and not hard wired. The **digit size** of the display unit will be **300 mm for 6 Nos.** and **200 mm for 15 Nos.** The placements/locations shall be decided during detailed Engineering.

Control panel cum desk with HW annunciation windows, ILPBs, Ammeters, Annunciation & desk PBs, mimic, lamps, Indicators, recorders, etc. shall be provided as per Annexure A – Control System Philosophy for BOP packages.

(Exact service & quantities will be worked out & approved during detailed engineering by owner).

- 6.02.03 Two (2) nos. vertical Steel Almirahs shall be provided for keeping documents in each BOP package's control room. Glass doors for each rack shall be provided such that the documents are visible from outside. Size of the rack shall be sufficient to easily fit technical manuals. The exact details shall be approved by Owner during detailed engg.

Suitable lockers (min. 24 nos. per unit) shall be provided in the room adjacent to the each central unit control room for storing of personal articles of control room personnel. Similarly suitable lockers (min. 8 nos. in each control room) shall be provided in BOP package control rooms for storing of personal articles of control room personnel. Also, vertical steel almirahs (min. 4 nos. per unit) shall be provided in Documentation Room for storing of documents.

Vertical Steel Almirahs shall also be provided for the following rooms, wherein final quantity may be decided by owner during detailed engineering

- a. Maintenance room – 6 nos. min. (per Unit)
- b. ERP room – 2 nos. min (Common for both unit).
- c. PADO Room – One (1) no. min.(per unit)
- d. Station In charge room – One (1) no. min (common for both unit).
- e. Simulator room – 4 nos. min. (per Unit)

Thickness of steel almirah sheet shall be 18 gauges.

In addition to above, All industry grade furniture including chairs, control tables, tables for printers etc. & Almirahs for storage of consumables/catalogues/manuals shall also be provided by the bidder as on required basis and finalized by owner anywhere in power plant. Details shall be finalised and approved by Owner during detailed engineering.

- 6.02.04 Control panels for service system like C.W. Pumps etc. will be located in the respective control room. In addition, some local panels will be provided near respective system/equipment such as Boiler Feed Pump, Hydrogen seal oil system, Electrostatic precipitator etc.

6.03.00 TERMINATION/Marshalling CABINETS & Interposing Relay Panel

Marshalling/Termination cabinets for the control system shall be supplied for terminating all cables originating from the field, MCC/SWGR or any other source of signal and for distributing the signals to different functional panels, MCC/SWGR and control cubicles.

Incoming cables from the field, MCC/SWGR or any other source of signal shall be terminated in suitable terminal blocks in logical sequence.

Prefabricated cables with plug in connectors at both ends shall be used for extending the signals to the functional panels. Matching plug sockets shall be provided in the termination cabinets for terminating the plugs.

Interposing relay panels for the system shall be supplied for mounting interposing relays & terminating all cables originating from the DO cards in case of solenoid valves, and other required services etc. IPR panels shall be placed in CER and LCR.

Interposing relay shall be mounted in respective SWGR/MCC/integral starter required for commands signals of HT/LT unidirectional drives and bidirectional drives, breakers, isolators & bus couplers etc from DDCMIS/DCS/PLC or any control system.

Terminal blocks shall be located inside the cabinets on support wings fabricated of metal plates.

The plug socket shall be mounted on hinged plates to provide an access to the rear pins of the plugs.

General features of termination cabinets and accessories shall conform to the general design and construction specification of panels. Terminal blocks shall be Rail mounted Terminal blocks (Screw less cage clamp type) with markers.

6.04.00

CONSTRUCTIONAL FEATURES OF PANELS, CONSOLES, CONTROL DESK, CUBICLES & ENCLOSURES

All panels, cubicles, consoles, SOV panels and enclosures furnished as per this specification shall be of free standing type and shall be constructed of specified gauge of steel plates. The panel sheet thickness shall be not less than 2 mm unless otherwise specified herein.

The panels, consoles/desks shall be reinforced as required to ensure true surfaces and adequate support for instruments mounted thereon. All instrument cutouts, mounting studs, and support brackets shall be accurately located. All welds on the exposed panel surfaces shall be ground smooth. Finished panel surfaces shall be free from waves, bellies, or other imperfections. Unless specified, otherwise, panel doors shall be 4 points hinged and shall have turned back edges and additional bracing where required to ensure rigidity. Door hinges shall be of the concealed type. Door latches shall be of the three-point type to ensure tight closing. Door locks shall be furnished which will allow actuation of all locks by a single master key. All panels shall have removable lifting eyebolts for safe lifting from top during storage and installation handling.

Cabinet doors shall be hinged and shall have turned back edges and additional bracing where required ensuring rigidity. Hinges shall be of concealed type. Door latches shall be of three/four-point type to assure tight closing. Detachable lifting eyes or angles shall be furnished at the top of each separately shipped section and all necessary provisions shall be made to facilitate handling without damage. Front and rear doors shall be provided with locking arrangements with a master key for all cabinets. If width of a cabinet is equal or more than 800 mm, double doors shall be provided.

All panels shall be mounted on vibration dampers, which are secured to channels mounted on the floor. The channels shall be field welded to steel plates set into the concrete flooring. The steel plates shall be located such as to approximate the outline of panel bases. The exact mounting details shall be as approved by the owner during detailed engineering stage. All panels shall be provided with adequate ventilation and packaging density of components shall be restricted so as to limit the temperature rise

above ambient to 10° C under the worst conditions. All panels shall have auto on/off switch for internal lighting. All the power supply circuit for control panels shall be provided with auto changeover circuitry.

In each panel /cabinet, a 24 VDC Voltmeter digital type shall be provided to check the Field Interrogation voltage.

Exhaust Fans with louvers & filters shall be provided on door's (front & Rear) upper side to remove hot air in all consoles, control desk and panels.

Fire/Smoke detectors shall be provided inside the Control room mounted system/control cabinets.

UPS, 24 V DC & non UPS's Feeder failure/ healthy indication shall be provided in each cabinet & remote indication shall be hooked up to DDCMIS/ PLC/annunciation & suitably grouped.

All the panels shall be equipped with Anti vibration pad of min. 15 mm size. Cable gland plate thickness shall be 3 mm.

Doors shall be provided with neoprene/polyurethane gasket only.

All the cable entries shall be at the bottom of electronic cubicles/control panels.

Protection class of panels shall be as specified at Vol. V, chapter 2.

6.04.01 Operator Control Desk

6.04.01.1 In CCR, Operator work station consoles/desk shall be of granite top of curved nature with powder coated frame. OWS consoles shall be provided with the facility for locating the CPU, document etc with all required utilities.

Unit In charge desk/consoles shall be of granite top of curved nature with powder coated frame. OWS consoles shall be provided with the facility for locating the CPU, document etc with all required utilities.

Station In charge desk/consoles shall be of granite top of curved nature with powder coated frame. OWS consoles shall be provided with the facility for locating the CPU, document etc with all required utilities.

6.04.01.2 Engineer work station and all other consoles/desk shall be ergonomically designed industrial grade type with swivel chairs for use at the various Programming stations and all other plant locations. All the equipment like Programmers stations, P C's, various peripherals & similar devices shall be complete with desks and they shall be of industrial grade stands and other mounting accessories and the same shall be completely erected & commissioned by the bidder. Details for other operating and engineering stations shall be as below:

- i. Operator Control desk shall be free standing table top type with doors at the back and shall be constructed of 3 mm thick CRCA steel plates. It shall have concealed cable & wire way management system. The top surface of control

desk shall be 30mm thick with the top 12mm of acrylic solid surface and the remaining 18mm of laminated medium density fibre board. Control desk shall consist of vertical, horizontal and base supports with their coverings for work surface, keyboard trays, Mouse pads, Monitor shelf and concealed cable and wire way management, perforated trays with covers in both horizontal & vertical directions.

- ii. To achieve durable & water resistant finish, a sheet of "plastic PVC membrane" on the surface of control desks shall be provided. Final paint finish with proper smoothening is to be ensured. Final finish of CD should be in line with relevant International standards. For more durability, the membrane sheet of the Control desk should extend 200 mm more into the underside of the desk. The cabling / wiring between OWS & CPU's, power supply cables etc. shall be aesthetically routed and concealed from view.
- iii. All the control desk shall be equipped with Anti vibration pad of min. 15 mm size. Cable gland plate thickness shall be 3 mm.
- iv. Doors shall be provided with neoprene/polyurethane gasket only.

6.05.00 SURFACE PREPARATION AND PAINTING

All panel exterior steel surfaces shall be ground smooth, and painted as specified below:

Suitable filler shall be applied to all pits, blemishes and voids in the surfaces. The filler shall be sand blasted so that surfaces are level and flat, corners are smooth and even. Exposed raw metal edges shall be ground burr free. The entire panel surface shall be sand blasted to remove rust and scale and all other residue due to the fabrication operation. Oil grease and salts etc. shall be removed from the panels by one or more solvent cleaning methods. Alternatively 7 tank process shall be followed.

Two spray coats of inhibitive epoxy primer – surface shall be applied to all exterior and interior surfaces, each coat of primer surfacer shall be of dry film thickness of 1.5 mil. A minimum of two spray coats of final finish colour (Catalysed epoxy finish) shall be applied to all surfaces of dry film thickness 2.0 mil. The finish colours for exterior and interior surfaces shall conform to the following shades:

- a) Exterior - RAL 7032/RAL 7035.
- b) Interior - Glossy white two coats/RAL 7035 with fire resistant paint

One uniform colour shade as finalized shall be applicable for complete plant.

Paint films, which show saggs, checks, blisters, teardrops, fat edges or other painting imperfections, shall not be acceptable and if any such defects appear, they shall be repaired by and at the expenses of the Bidder.

6.06.00 PANEL WIRING

Interconnecting wiring shall be provided between all electrical devices mounted in the panels, and between the devices and terminal blocks if the devices are to be connected

to equipment outside the panels by cabling and through pre-fabricated plug in cables. All alarm contacts located within a panel shall be wired to terminal blocks. Thermocouple and other special circuits shall be field wires direct to instrument terminal blocks without the use of panel wiring.

All control and instrument wiring used within the panels shall conform to NEC and NEMA standards and shall be factory installed and tested at the works of a qualified manufacturer. All interior wiring shall be installed neatly and carefully, and shall be terminated at suitable terminal blocks. Sufficient clearance shall be provided for all control and instrumentation leads, and all incoming and outgoing leads shall be connected to terminal blocks suitably located for connecting external circuits.

All panel wiring shall have appropriate ferruling for clear identification. Interior wiring shall be so arranged that the external connections can be made with only one wire per terminal point. Any common connections shall be made internal side of the terminal blocks. Common connections shall be limited to two wires per terminal. Instrumentation cable shield wires shall be connected to separate terminal at the terminal block. Signal circuit shields shall be grounded separately.

All internal wiring (except low level instrument wiring) shall be National Electric Code Type SIS, Polymeric/Elastomeric insulated, tinned copper stranded conductor, switchboard wire, or owner approved equal.

Panel wiring shall have a flame resistant insulation with adequately sized 650/1100 V grade tinned copper stranded conductor based on current carrying capacities as set forth by the National Electric Code.

Wire sizes shall be as specified herein and suitable for intended applications.

Wiring to door mounted devices shall be provided with (49 strand minimum) adequate loop lengths of hinge wire so that multiple door openings will not cause fatigue breaking of the conductor.

Wiring shall be arranged to enable instruments or devices to be removed and/or serviced without unduly disturbing the wiring. No wire shall be routed across the face or rear of any device in a manner, which will impede the opening of covers or obstruct access to leads, terminals or devices.

Panel wires shall be identified with wire number and each termination by means of Action craft products split sleeve or Borden Chemical Co. indelible tubing markers or owner approved equal. Corrections and modifications of all panel wiring shall be Bidder's sole responsibility. Any corrections/modifications required at site for successful commissioning shall be done by the Bidder without any additional costs. Terminal lugs furnished must be of the compression, insulated sleeve, half ring tongue type. Open-ended terminal lugs will not be accepted. Wires shall not be looped around the terminal screws or studs.

Wires shall not be tapped or spliced between terminal points.

Panels, cabinets, consoles/desks will be provided with removable, gasketed cable gland plates and cable glands, for all floor slots used for cable entrance. Split type grommets shall be used for prefab cables.

Internal wiring in factory prewired electronic systems cabinets may be installed according to the Bidder's standard as to wire size, insulation, and method of termination on internal equipment except that insulation for all wiring power supply wiring, and interconnecting cables between devices shall pass the following tests.

- a) Flammability test IEEE 383/1974
- b) When tested under UITPP test method or ASTM 2893/77 light transmittance of 80%
- c) When tested under IEC 754 -1 maximum acid gas generation shall be 2% by weight
- d) Oxygen index not less than 30 as per ASTM D 2863.

All terminations for intra panel wiring inter panel cabling and connecting the Bidders panels, PB stations, control stations etc. shall be with cage clamp Screwed less connections. Soldered connections are not acceptable. All field side or external input connections shall also preferably of Cage clamp/Spring Clamp/ Screwed less connection.

Conductor Clamping shall also confirm to Standard IEC – 60947-1 & IEC-60947-7-1.

Identification of conductors may be done by insulation colour coding identified on drawings or by printed wiring lists. Terminal blocks for connection of external circuits in to factory prewired electronic system cabinets shall meet all the requirements as described elsewhere in the specification. For all multicore cables, the outer sheath shall satisfy the properties identified above. However, for panel wiring, the wiring insulation shall also satisfy the properties identified above. The internal wiring shall be done in coloured wiring.

6.06.01

Following Wire size shall be utilized for internal wiring:

- a. Current (4-20 mA) : 0.75 sq.mm
Low voltage signals :
(AI/AO & DI signals)
- b. DO signals, Ammeter/ : 1.5 sq.mm
voltmeter circuit, control
switches, indicator, recorder
- c. Internal Illumination : 2.5 sq.mm
- d. Size of Power supply cables shall be as below:-
 - i. 1 to 16 Amp. - 2.5 sq. mm
 - ii. 17 to 20 Amp. – 4 sq. mm
 - iii. 21 to 32 Amp. - 6 sq. mm
 - iv. 33 to 40 Amp. - 10 sq. mm.
 - v. 41 to 60 Amp. - 16 sq. mm
 - vi. Power earth - 4 sq. mm

6.07.00

INSTRUMENTS MOUNTING

6.07.01 Instruments and relays mounted on the panels shall be easily accessible for repair and replacement without disturbing other equipment their connected wiring. No special tools shall be needed for the purpose.

6.08.00 PANEL ILLUMINATION

Panels shall be provided with LED based illuminating lamps with door switch and six (6) point 6/ 16A, 240V A C uni versal t ype po wer so ckets with sw itch f or m aintenance purposes. These switches shall be with quick make and break mechanism. 100 % spare LED l amps shall be p rovided with each panel , t hese a re i n a d d i t i o n a l t o m a n d a t o r y spares.

6.09.00 FUSE BLOCKS

Where fuse blocks rated 30 amp. 250 Volts are required by the specifications or the manufacturer's design, t hey sh all be m o d u l a r t y p e w i t h b a k e l i t e f r a m e a n d r e i n f o r c e d retaining clips. B locks shall be cl a s s H.2 pole, screw terminal fuse blocks. B locks for other current and voltage ratings shall be similar in construction.

6.10.00 FUSES & MCB

All fuses shall be fast acting semiconductor types for AC supply and compatible to the UPS f uses. For a l l D C P o w e r e d d e v i c e s , s i m i l a r l y t h e f u s e s s h a l l b e f a s t a c t i n g compatible to DCDB fuse provisions. All the AC power supplies shall be provided with the protection of Fast acting semi conductor fuses & 2 P thermomagnetic type MCB. Make of Fuses shall be GE or Siemens. For all the DC power supply circuits, electronic type DC MCB shall be use d o n l y . M a k e o f D C M C B s h a l l b e S i e m e n s , P h o e n i x c o n t a c t s , M u r r , Weidmuller, or Lutze.

50 % spare fuses shall be provided with each panel, these are in additional to mandatory spares.

6.11.00 MOULDED CASE CIRCUIT BREAKERS

Moulded ca s e c i r c u i t b r e a k e r s u s e d i n e q u i p m e n t c o v e r e d u n d e r t h e s e s p e c i f i c a t i o n s shall have not less than 5000 amp. Interrupting capacity at 220 Volts DC 10,000 Amp. Symmetrical interrupting capacity at 240 Volts AC. MCCB shall be provided at each main feeder line like ACDB & DCDB main feeders, PLC main feeder, control panels, UPS circuits etc.

6.12.00 GROUNDING

All panels and cabinets shall be provided with a continuous bare copper ground bus of minimum 6 mm x 25/50 mm cross section. The ground bus shall be bolted to the panel structure and effectively ground the entire structure. Each Ground bus shall have provision at each end for co n n e c t i o n o f g r o u n d l e a k s (6 m m x 50 m m G I F l a t s) b y suitable bolting. All system cabinets shall be brought to a common system ground by the bidder. Electronic earthing resistance shall be < 0.5 ohms.

Each circuit requiring grounding shall be i n d i v i d u a l l y a n d d i r e c t l y c o n n e c t e d t o t h e p a n e l ground bus by ring tongue type compression lugs. For electronic system cabinets the system ground bus shall be insulated from the cabinet enclosure and shall be separately

connected to the system ground. All system cabinets shall be brought to a common system ground by the bidder.

The Bidder shall furnish his recommendations regarding grounding requirements for all equipment/systems and shall specifically indicate the deviations if any from the above requirements as a part of his proposal.

6.13.00 TERMINAL BLOCKS

For all inputs to the system emanating from the field or other systems, the bidder shall furnish terminals suitable for correct size of field cables.

6.13.01 All outputs going to MCC/SWGR terminal blocks, shall be rated 600 volts minimum and shall have strap screw less terminals suitable for connection of wires with ring tongue type lugs. Standard terminal blocks shall be screw less cage clamps type. Terminal blocks shall be approximately sized for larger wire size of higher voltage insulated incoming conductors as necessary. All the TBs used shall be 6.6 polyimide to withstand corrosion and the metallic portion shall be coated against rust /corrosion. All metal parts should be non –ferrous in nature.

6.13.02 Terminal blocks shall be provided with white marking strips and re permitted by the safety codes and standards shall be without covers.

6.13.03 Fuses shall not be mounted on terminal blocks. Neither step type terminal blocks nor angle mounting of terminal blocks will be acceptable.

6.13.04 At least 20 per cent spare unused fully wired terminals shall be provided on each terminal block for circuit modifications and for termination of all conductors in a multi-conductor control cable with each panel, enclosure, cubicle, SOV Boxes etc.

6.14.00 NAME PLATES AND LABELS

Name plates of adequate size shall be provided for each panel on front and rear of the panel. Instruments/other accessories mounted inside the panels shall have identification marking clearly visible from inside.


Devices to be mounted on the panels shall also be labeled on the panels shall also be labeled on the outside of the panel. Name plates shall be of polyamide sheets with black letters on white background. Name plates shall be attached to the boards by means of stainless steel panhead screws. Fuses provided for protection of various boxes shall be accessible for replacement. Fuse boxes shall be provided with circuit label and fuse rated current and voltage.

Markings/Labels

All markers/labels shall be made of halogen & silicon free polyamide material with inflammability class V2 as per UL 94, ensuring scratch proof printing with the use of environment friendly solvent free ink & latest BLUEMARK UV technology so as to comply the WIPE RESISTANCE according to DIN EN 61010-1/VDE 0411-1.

**H.DRIVE
CONTROL
PHILOSOPHY
FOR
ANALOG
&
BINARY
DRIVES**

DCS INTERFACE FOR BIDIRECTIONAL DRIVE(WITH INTEGRAL STARTER)

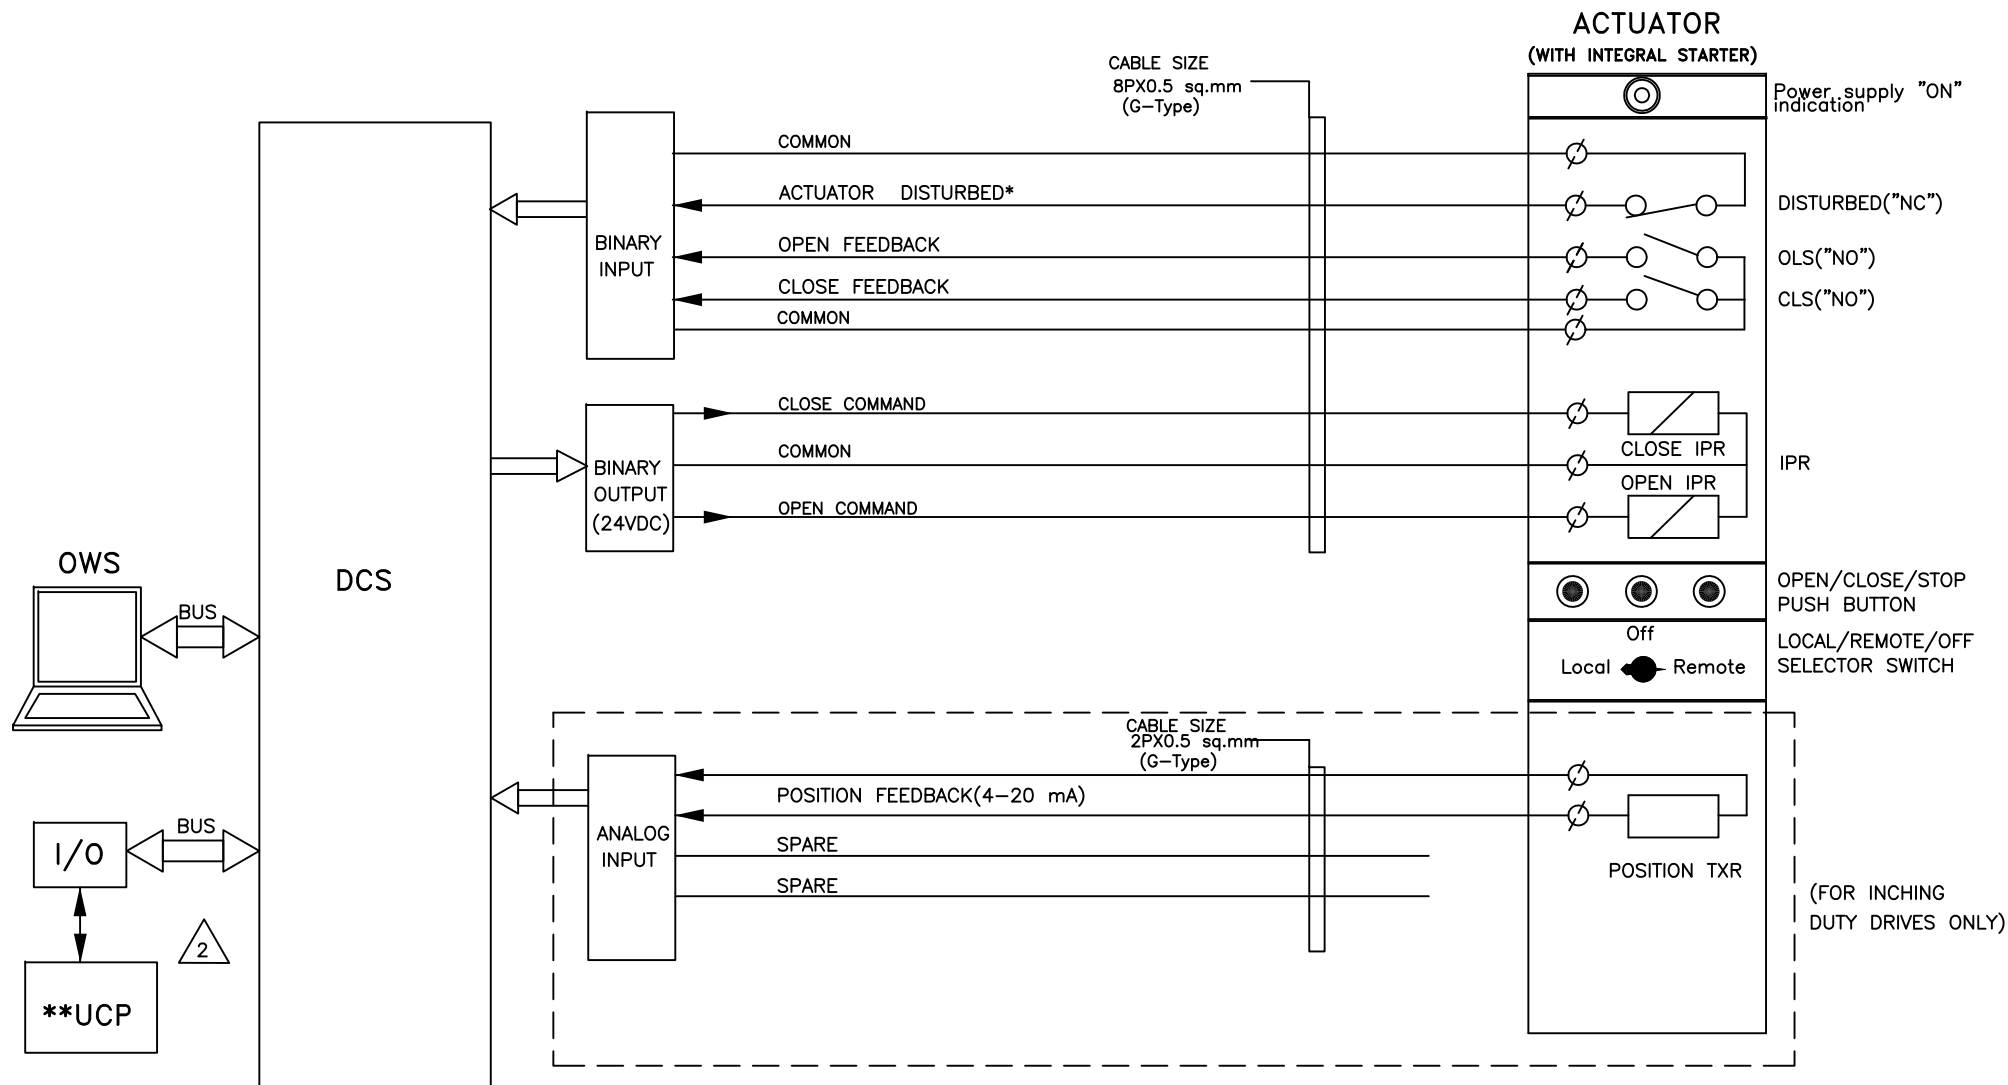

NOTE:

* DISTURBED= Loss of Power supply (1 Phase/3 Phase)/
Loss of control supply/ Motor thermostat trip/
Thermal over load/Torque open/close cutoff
Local/Off/Remote Sel. switch in local or off mode/
Stop PB optd.



** AS APPLICABLE.



PROJECT: 2X660 MW ENNORE SEZ STPP

TITLE

DDCMIS INTERFACE FOR
BIDIRECTIONAL DRIVE

DRG.NO. PE-DM-412-145-I002

DATE 01.05.2015

REV.NO.

02


SHT

7

OF

11

DCS INTERFACE FOR UNIDIRECTIONAL LT DRIVE

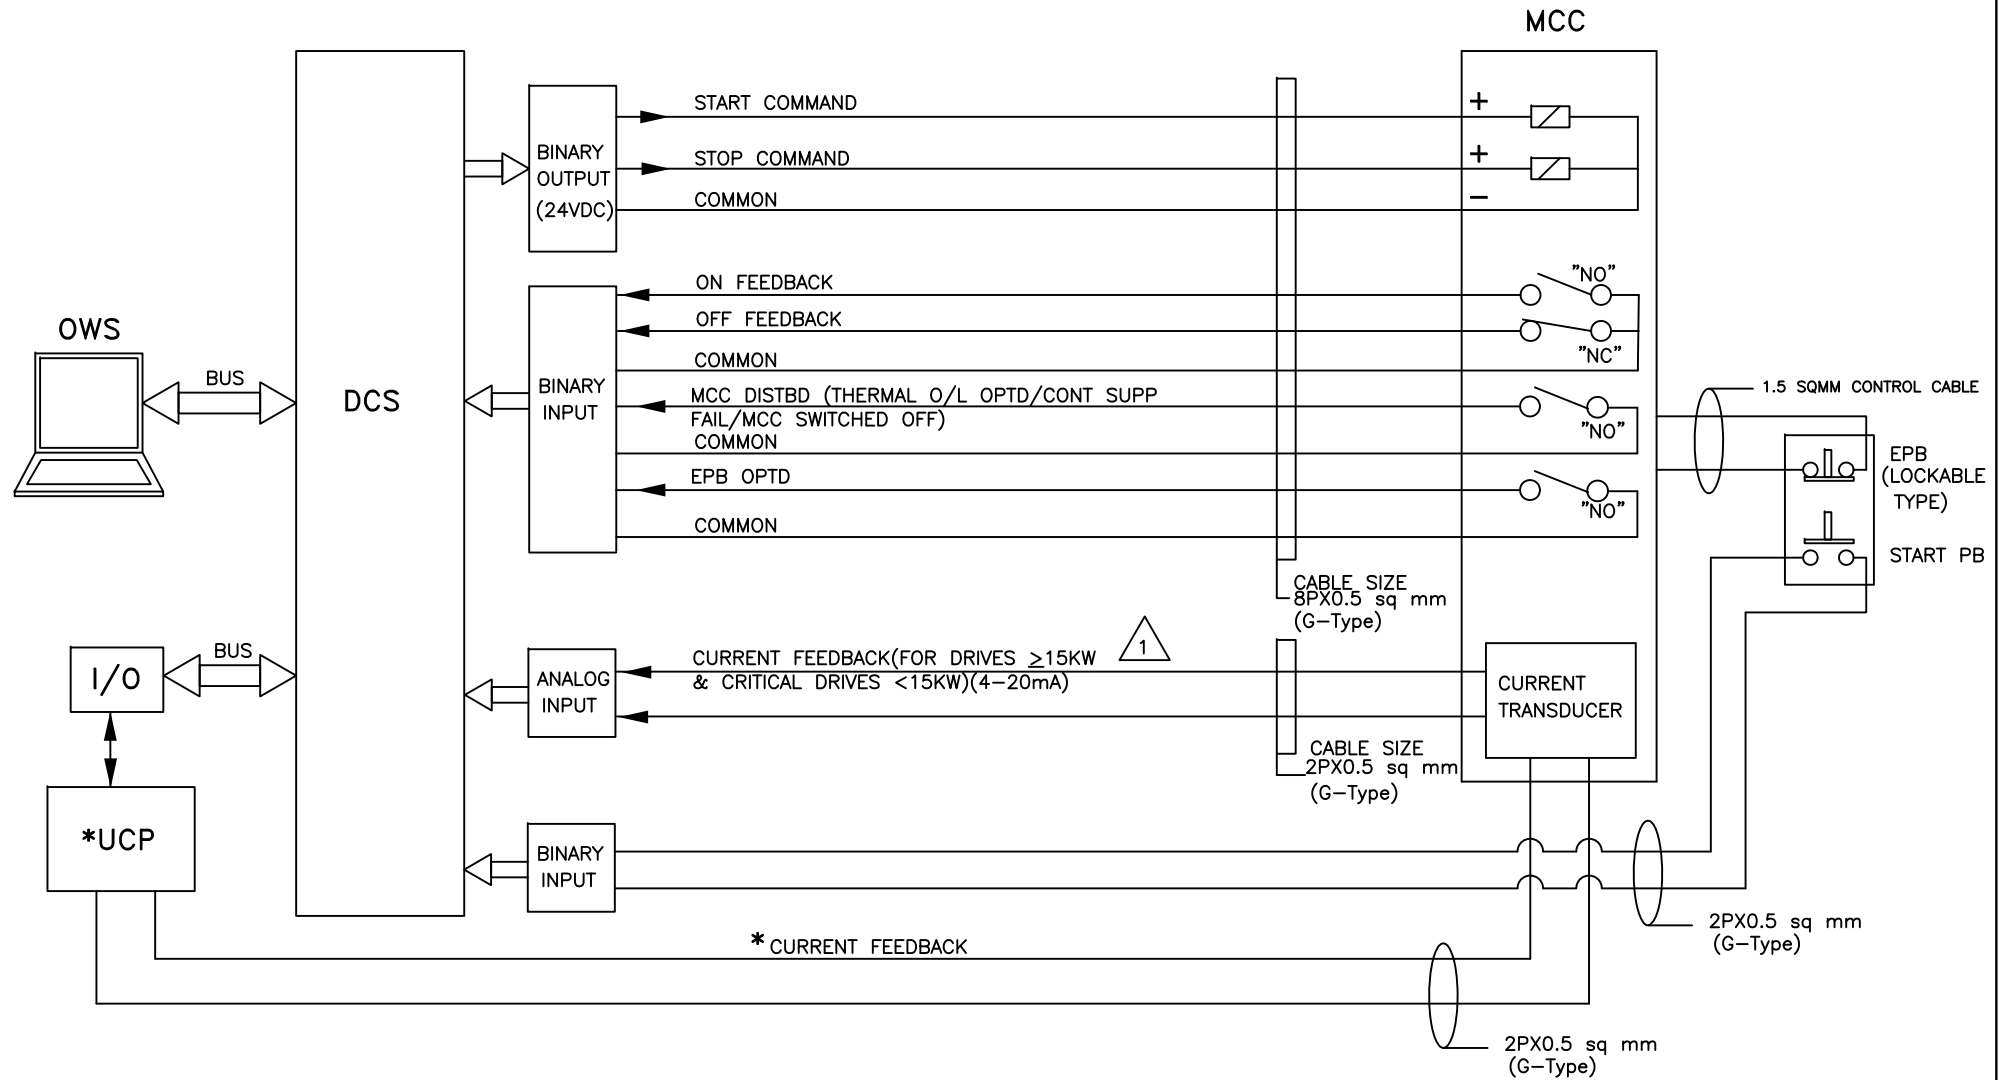

NOTE:

*WHEREVER APPLICABLE




PROJECT: 2X660 MW ENNORE SEZ STPP

TITLE

DDCMIS INTERFACE FOR
UNIDIRECTIONAL LT DRIVE

DRG.NO.	PE-DM-412-145-I002
DATE	01.05.2015
REV.NO.	02
SHT	8 OF 11

DCS INTERFACE FOR SOLENOID DRIVE (220V DC/ 24V DC / 240V AC UPS)

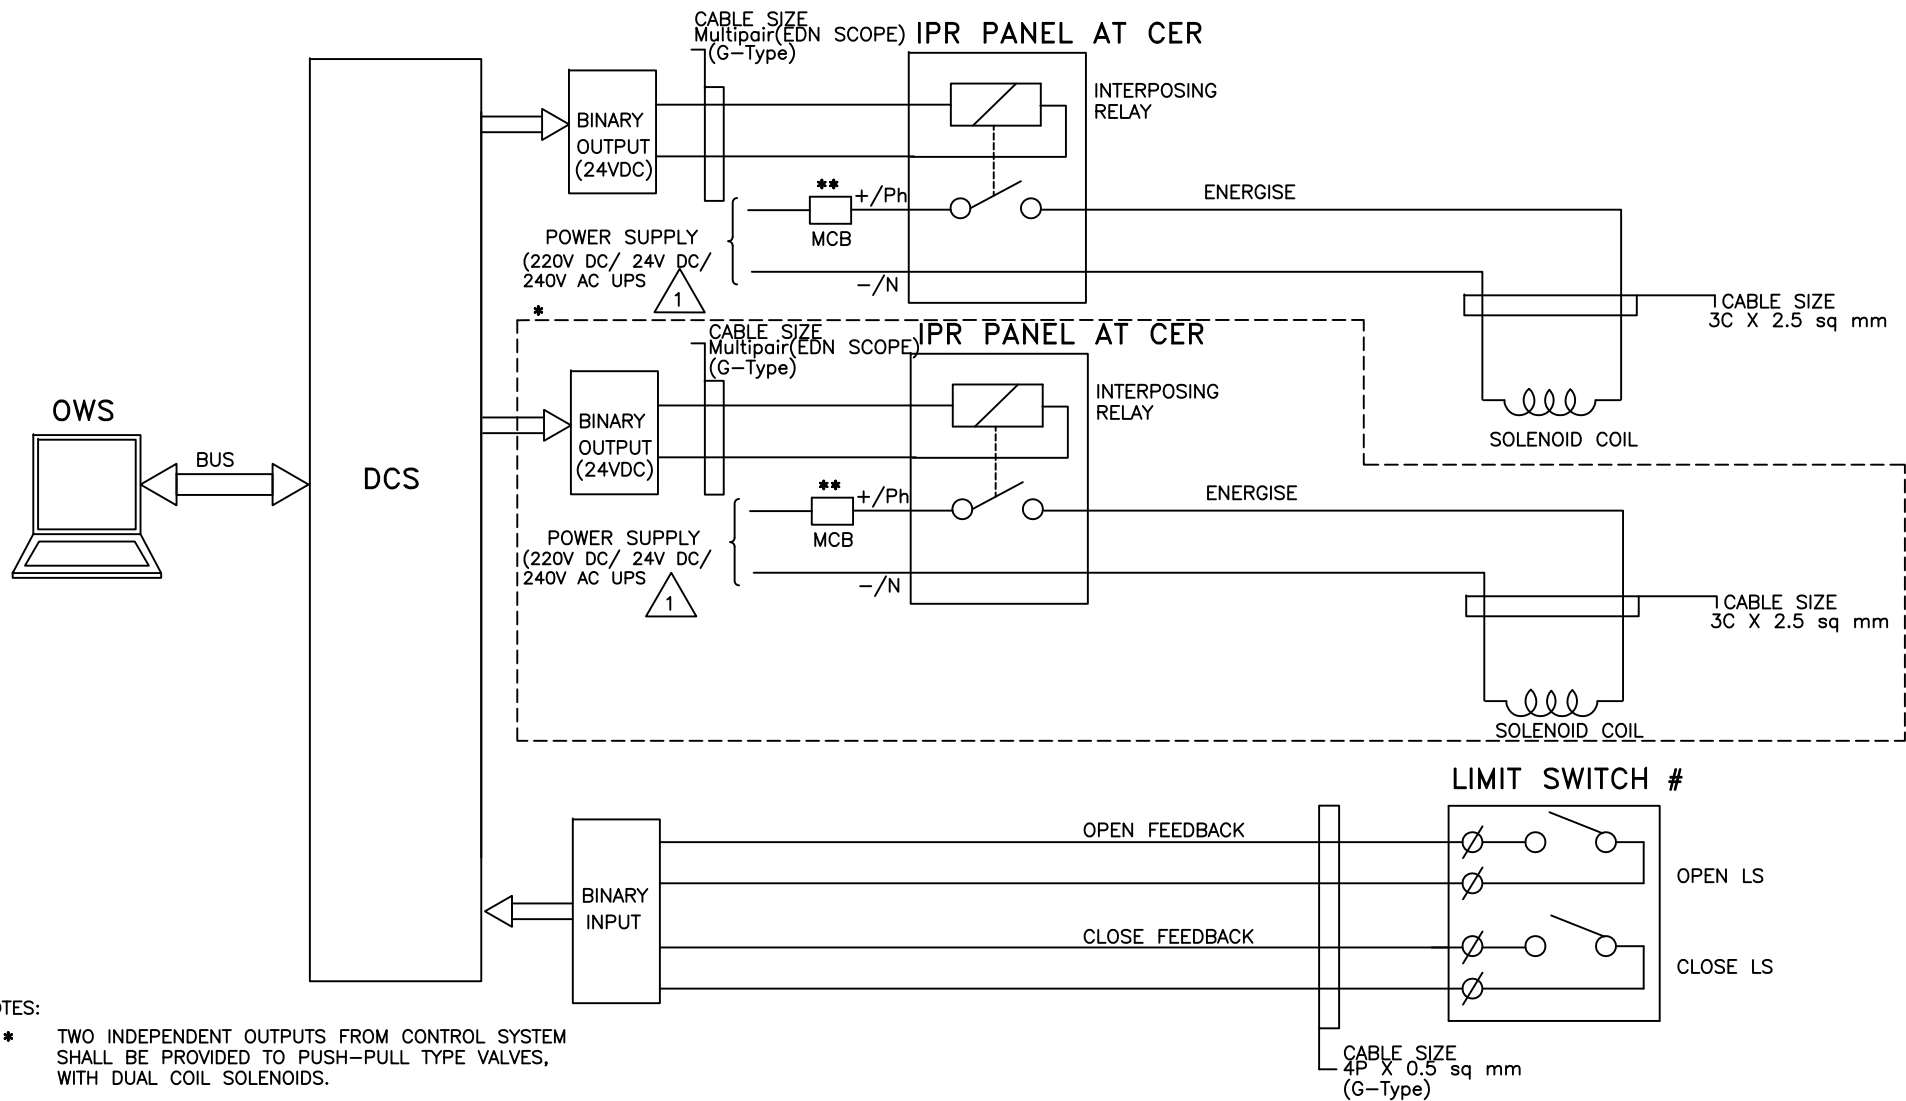

NOTES:

* TWO INDEPENDENT OUTPUTS FROM CONTROL SYSTEM SHALL BE PROVIDED TO PUSH-PULL TYPE VALVES, WITH DUAL COIL SOLENOIDS.

** MCB SHALL BE PROVIDED FOR EACH SOLENOID

FOR ON/OFF TYPE, SOLENOID ACTUATED VALVE. RELAY CONTACTS SHALL BE WIRED AS FEEDBACK WHEREVER LIMIT SWITCH FEEDBACKS ARE NOT AVAILABLE. 1 CONTACT FOR SINGLE COIL & 2 CONTACT FOR DUAL COIL (OPEN LIMIT SWITCH & CLOSED LIMIT SWITCH).

*** BHEL WILL TAKE CARE OF DE-ENERGISE TO TRIP PHILOSOPHY FOR FAIL SAFE CONTROL SYSTEM (WHEREVER REQUIRED)



PROJECT: 2X660 MW ENNORE SEZ STPP

TITLE


DDCMIS INTERFACE FOR
SOLENOID DRIVE

DRG.NO. PE-DM-412-145-I002

DATE 01.05.2015

REV.NO. 02

SHT 9 OF 11 Page 616 of 680

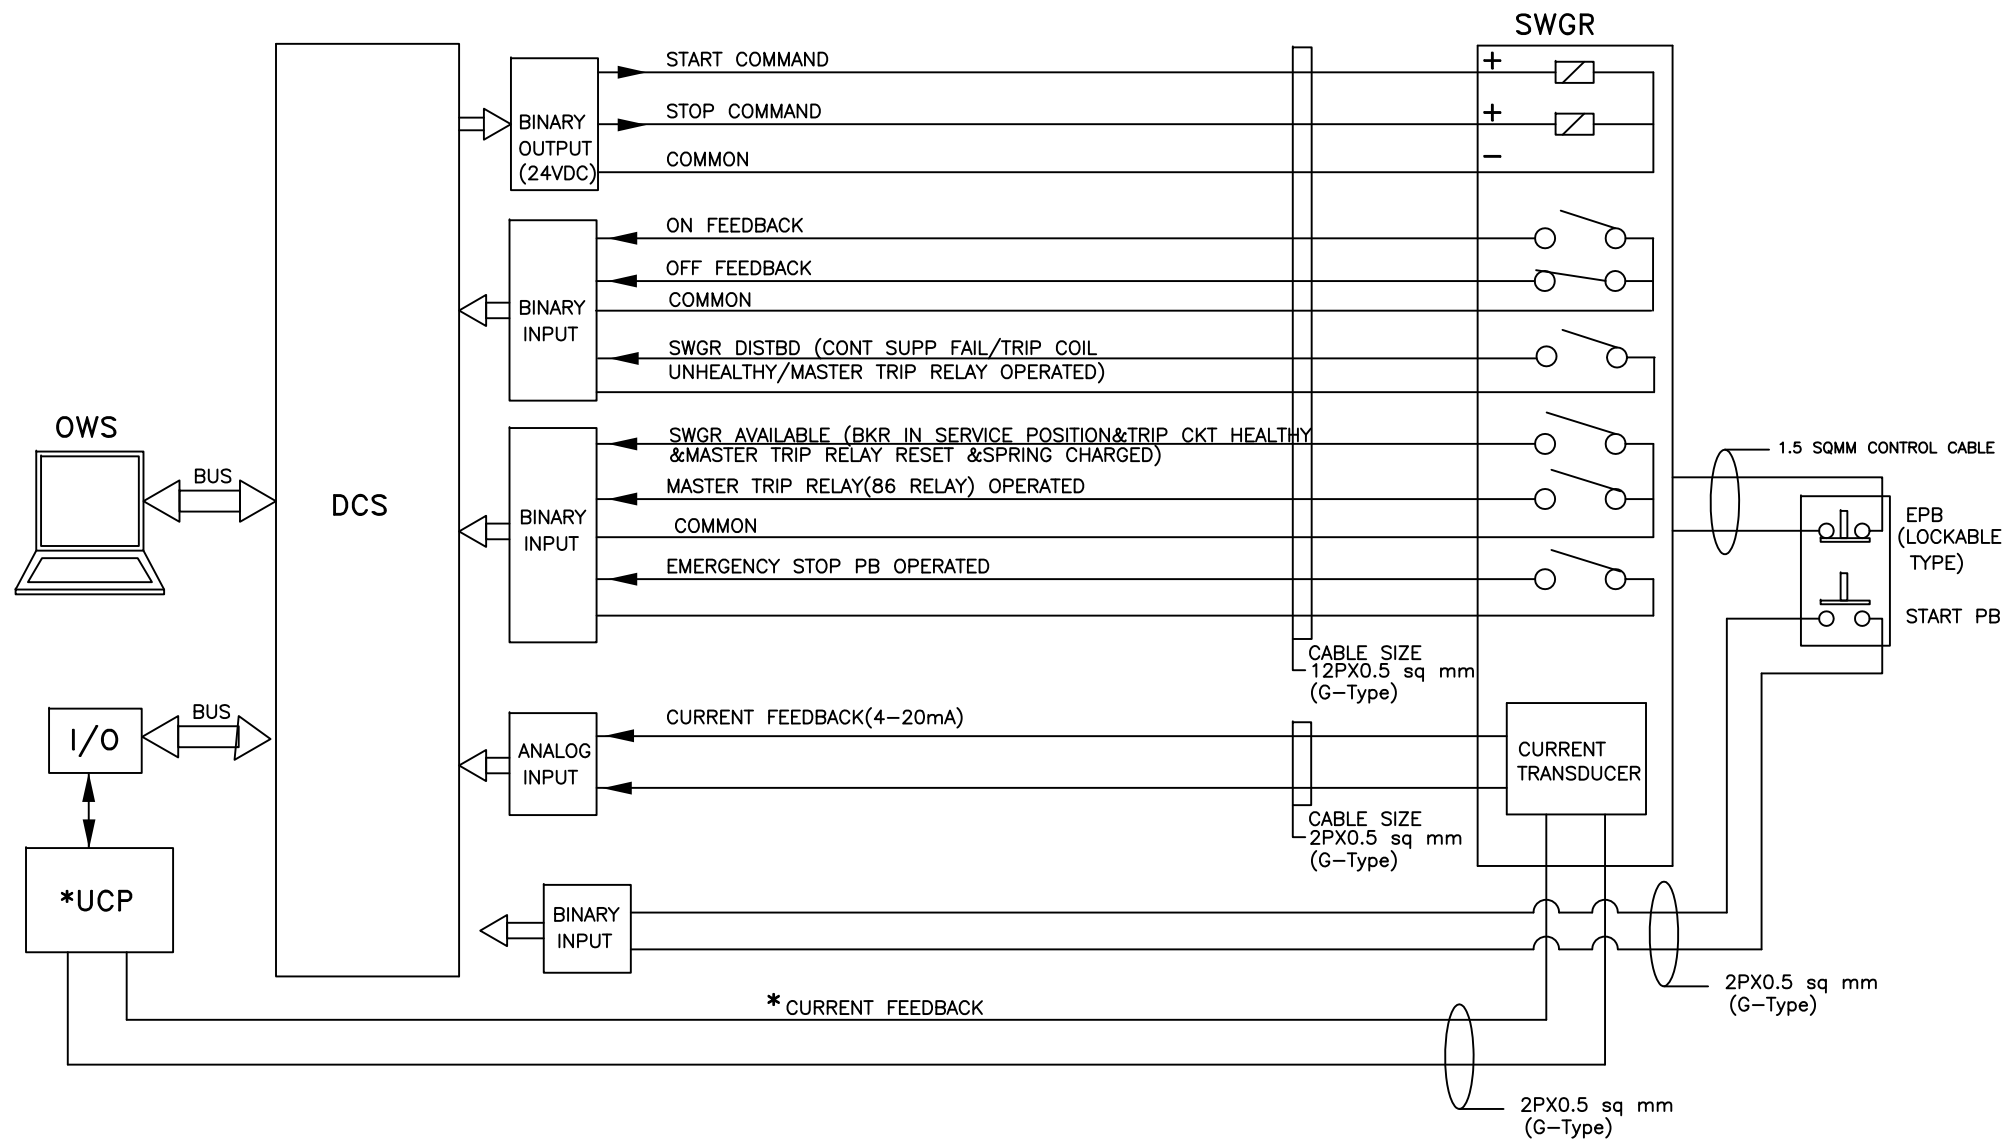


VIBRATION, WINDING & BEARING SIGNALS SHALL BE INTERFACED WITH DDCMIS AND INCLUDED IN EDN'S DOCUMENT.



TITLE	DDCMIS INTERFACE FOR UNIDIRECTIONAL HT DRIVE
-------	---

DRG.NO.	PE-DM-412-145-I002
DATE	01.05.2015
REV.NO.	02
SHT	10 OF 11 Page 617 of 617

DCS INTERFACE FOR ANALOG DRIVE (WITH SMART POSITIONER)

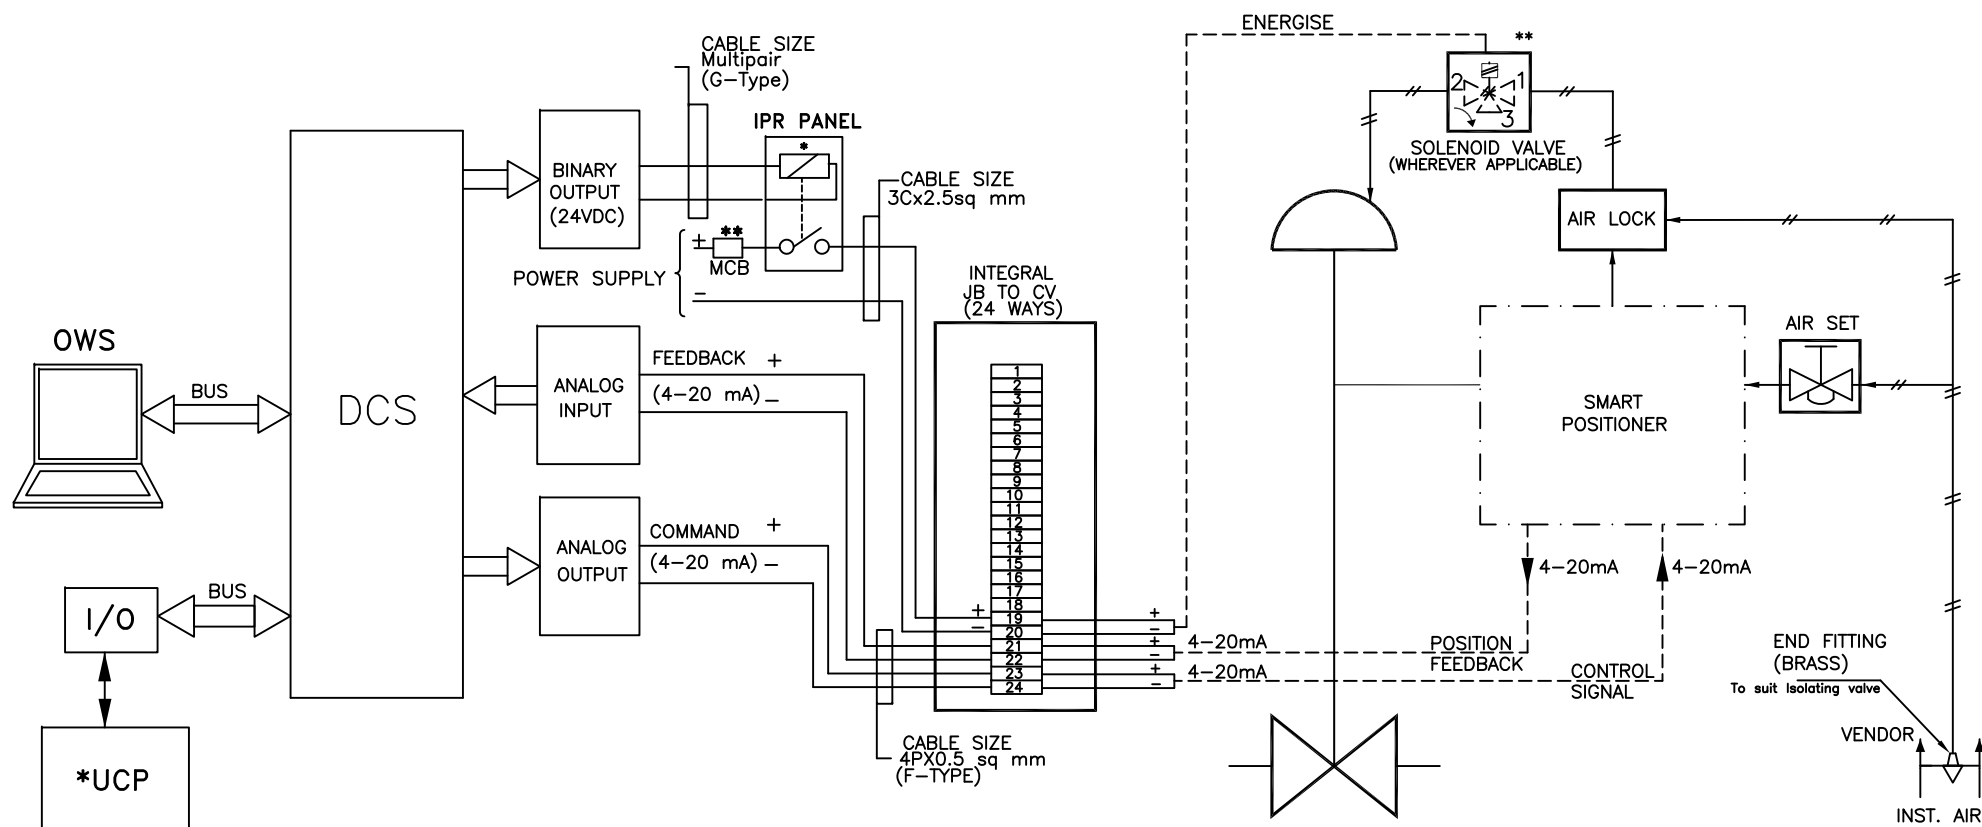

NOTES:

- ** APPLICABLE TO VALVES WHERE PROTECTION OPEN/CLOSE ACTION FOR CONTROL DEMAND OVERRIDING IS REQUIRED.



PROJECT: 2X660 MW ENNORE SEZ STPP

TITLE TYPICAL HOOK-UP DIAGRAM
ANALOG DRIVE (WITH SMART POSITIONER)

DRG.NO. PE-DM-412-145-I002

DATE 01.05.2015

REV.NO. 02

SHT 11 OF 11 Page 618 of 680

**J.APPLICABLE
CODES
&
STANDARDS**

1.08.00 CODES AND STANDARDS

1.08.01 All equipments, system and service covered under this specification shall comply with the requirements of the latest statutes regulations and safety codes as applicable in the locality where the equipments/systems will be installed. The Bidder shall fully acquaint himself with these requirements and shall ensure compliance with them.

The equipments, systems and services furnished as per this specification shall conform to the codes and standards mentioned in Cl. no. 1.08.02 of this Section. However in the event of any conflict between the requirements of two standards or between the requirements of any standard and this specification, the more stringent requirements shall apply unless confirmed otherwise by the Owner in writing. The decision of the Owner shall be final and binding in all such cases.

The Bidder's scope of supply shall include some items such as thermowells, and other in-line devices for main steam, hot reheat, cold reheat, feed water system falling under the purview of Indian Boiler Regulation (IBR) Act. It shall be the responsibility of the Bidder to obtain the necessary approval of the concerned Inspecting Authority/Chief Inspector of Boilers for the design and design calculations and manufacturing and erection procedures as called for under the IBR act for all items requiring such certifications.

The requirements of statutory authorities (e.g. MOEF, Inspectors of factories, IBR, TAC, BEE, CPCB/TNPCB etc) with regards to various plants areas like Main plant, Fuel oil plant/system, Chlorination Plant, Fire Fighting system, Emission Measurement, Ambient Air Monitoring system etc. shall be complied, even if not actually spelt out.

1.08.02 Reference Codes and Standards

The design, manufacture, inspection, testing, site calibration and installation of all equipment and systems covered under this specification shall conform to the latest editions of codes and standards mentioned below and all other applicable ANSI,



2 x 660 MW ENNORE SEZ Supercritical Thermal Power
Project at Ash Dyke of NCTPS
Spec. No. CE/C/P&E/EE/E/OT.No.03/2013-14

Vol. V /Sheet - 14



ASME, IEEE, NEC, NEMA, ISA, DIN, VDE, NFPA, IEC, EIA, TIA and Indian Standards and their equivalents. Bidder to note that in no case, OEM/manufacturers own standards shall be accepted.

1.08.02.01 Temperature Measurement

1. Performance Test Code for temperature measurement ASME PTC 19.3 (1974 – R 1998)
2. Temperature measurement - Thermocouples ANSI-MC 96.1 – 1982, IEC 584
3. Temperature measurement by electrical resistance thermometers - IS-2806.
4. Thermometer-element-platinum resistance-IS-2848, IEC 751/DIN 43760
5. RTD Design Code – DIN EN 60751:1996, BS EN 60751 : 2008
6. Thermowell Design Code – ASME PTC 19.3 TW – 2010

1.08.02.02 Pressure Measurement

1. Performance Test Code for pressure measurement - ASME PTC 19.2 (2010)
2. Bourdon tube pressure and vacuum gauges - IS 3624, IS 3602, ASME B 40.1

1.08.02.03 Electronic measuring Instruments & Control hardware

1. Automatic null balancing electrical measuring instruments - ANSI C 39.4 (Rev. 1973), IS 9319
2. Safety requirements for electrical and electronic measuring and controlling instrumentation - ANSI C 39.5 - 1974.
3. Compatibility of analog signals for electronic industrial process instruments - ISA-S 50.1:ANSI MC 12.1 - 1975.
4. Dynamic response testing of process control instrumentation - ANSI MC 4.1 (1975): ISA-S26 (1968).
5. Surge withstand capability (SWC) tests - ANSI C 37.90A (1974) IEEE Std. 472 (1974). IEC – 255.4.
6. Printed circuit boards - IPC TM-650, IEC 326 C
7. General requirements and tests for printed wiring boards - IS 7405 (Part-I) - 1973
8. Edge socket connectors - IEC 130-11.
9. Requirements and methods of testing of wire wrap terminations DIN 41611 Part-2.
10. Dimensions of attachment plugs & receptacles ANSI C73-1973.
11. Direct acting Electrical Indicating Instruments: IS-1248-1968.

1.08.02.04 Instrument Switches and Contacts

1. Contact rating - AC services NEMA ICS Part-2 125, A600
2. Contact rating - DC services NEMA ICS Part-2-125, N600.

1.08.02.05 DDCMIS & other Control System

1. Application of Safety Instrumented System – ANSI/ISA 84.01 1996
2. Functional Safety - Safety Instrumented System for Process Sector – IEC – 61151

3. IEEE Application Guide for Distributed Digital Control Monitoring for Power Plant – IEEE 1046
4. Fossil Fuel Power Plant Steam Turbine Bypass System – ANSI/ISA – 77.13.01
5. Human System Interface Design Review Guide lines – NUREG – 700
6. Annunciation Sequence and Specification – ANSI/ISA 18.1
7. “IEEE 1050, IEEE guide for Instrumentation & control system grounding in generating station”,
8. ANSI/ISA-77.44.01-2007 - Fossil Fuel Power Plant - Steam Temperature Controls
9. ANSI/ISA-RP77.60.05-2001 (R2007) - Fossil Fuel Power Plant Human-Machine Interface: Task Analysis
10. ANSI/ISA-77.42.01-1999 (R2006) - Fossil Fuel Power Plant Feedwater Control System – Drum-Type
11. ANSI/ISA-77.20-1993 (R2005) - Fossil Fuel Power Plant Simulators - Functional Requirements
12. ANSI/ISA-77.41.01-2005 - Fossil Fuel Power Plant Boiler Combustion Controls
13. ANSI/ISA-RP77.60.02-2000 (R2005) - Fossil Fuel Power Plant Human-Machine Interface: Alarms
14. ANSI/ISA-77.70-1994 (R2005) - Fossil Fuel Power Plant Instrument Piping Installation
15. ANSI/ISA-TR77.60.04-1996 (R2004) - Fossil Fuel Power Plant Human-Machine Interface-Electronic Screen Displays
16. ANSI/ISA-77.43.01-1994 (R2002) - Fossil Fuel Power Plant Unit/Plant Demand Development-Drum Type
17. ANSI/ISA-77.13.01-1999 - Fossil Fuel Power Plant Steam Turbine Bypass System

1.08.02.06 Electronic Cards, Subassemblies and Componets

a) Unpackaged

- | | | | |
|------|----------------|---|-------------|
| i) | Vibration | : | IEC-68.2.6 |
| ii) | Shock | : | IEC-68.2.27 |
| iii) | Drop & Topple: | : | IEC-68.2.31 |

b) Packaged

Vibration, Drop & Static Compression - NSTA

C) Electromagnetic Compatibility

- | | | | |
|------|--------------------------------|---|-------------------|
| i) | Electrical Fast Transient | : | IEC-801.4 |
| ii) | Surge Withstand | : | IEC-255.4 |
| iii) | Radiated Electromagnetic Field | : | IEC-801.3 |
| iv) | Electrostatic Discharge | : | IEC-801.2 |
| v) | Electromagnetic Emission | : | VDE 0871, Class B |

1.08.02.07 UPS System/DC control power supply system:

1. Practices and requirements for semiconductor power rectifiers - ANSI C34.2-1973.

2. Relays and relay systems associated with electrical power apparatus - IEEE Std. 3.13, ANSI C 3790-1983.
3. Surge withstand capability tests - ANSI C37.90a-1974. IEEE Std. 472 - 1974
4. Recommended practice for sizing large lead storage batteries for generating stations & substations - IEEE-485.
5. Performance testing of UPS - IEC 146.
6. IEC 62040 – General & Safety requirement of UPS.
7. IEC 62040-2 - UPS – EMC Requirement.
8. IEC 62040-3 - UPS – Method of specifying the performance and test requirement.
9. IEC 60269-2 – Main Supply Fuse.
10. IEC 60947 – MCCB.
11. IEC/EN 60623– BATTERIES.
IEEE485/IEEE1115
IS : 10918, IS : 1069
12. IEC 60146 - For DC system.

1.08.02.08 Control Valves

1. Control Valve sizing - Incompressible fluids - ISA S39.2 - 1972.
2. Control valve sizing - Compressible fluids - ISA S39.3 - 1973, ISA S39.4 - 1974.
3. Face to face dimensions of control valves - ANSI B16.10
- 1) ISA Hand book of control valves - ISBN B1047-087664-234-2.
- 2) Valves - flanged, threaded and welding end : ANSI B 16.34(2009)
- 3) Casting : ASTM A 216 / A 351 (2008)
- 4) Welded end connection : As per ASME boiler and pressure vessel code / ANSI.B 16.34(2009), B16.25 (2009), B 16.11(2009).
- 5) Defect removal: ANSI B 16.34 2009.
- 6) Cleaning : ASTM A 380 2006.
- 7) CV test : As per ISA procedure S 75.02 (2008).
- 8) Control Valve seat leakage : ANSI/FCI 70.2

1.08.02.09 Enclosures

1. Types of enclosures - NEMA Std. ICS-6-110.15 through 110.22 (Type 4 to 13).
2. Racks, panels, and associated equipment - EIA: RS-310-B (ANSI C83.9 - 1972)
3. Protection Class for Enclosure, Cabinets, Control Panels and Desks - IS-13947-1962.

1.08.02.10 Apparatus, enclosures and installation practices in hazardous areas

1. Classification of hazardous area - NFPA Art. 500, Vol.70-1984.
2. Electrical Instruments in hazardous dust locations - ISA-RP 12.11
3. Intrinsically safe apparatus - NFPA Art.493 Vol.4.1978
4. Purged and pressurized enclosure for electrical equipment in hazardous location - NFPA Art. 496 1982.

1.08.02.11 Sampling System

1. Stainless steel material of tubing and valves for sampling system - ASTM A269-82 Gr TP316.
2. Submerged helical coil heat exchangers for sample coolers ASTM D 11-98.
3. Water and Steam in power cycle - ASME PTC 19.11(2008).
4. Standard methods of sampling system - ASTM D 1066-69.

1.08.02.12 Annunciators

1. Specifications and guides for the use of general purpose annunciators - ISA RP 18.1-1979.
2. Surge withstand capability tests - ANSI C.37.90a - 1974 and IEEE std. 472-1974

1.08.02.13 Interlocks, Protections

1. Relays and relay system associated with electric power apparatus - IEEE std.3.13.
2. Surge withstand capability tests - ANSI C.37.90a - 1974 and IEEE Std. 472 - 1974.
3. General requirements & tests for switching devices for control and auxiliary circuits including contactor relays - IS-6875 (Part-I) 1973.
4. Turbine water damage prevention - ASME - TDP-1980.
5. Boiler safety interlocks - NFPA Section 85B, 85D, 85E, 85F, 85G.

1.08.02.14 Process Connection and Piping:

1. Codes for pressure piping power piping ANSI B31.1
2. Seamless carbon steel pipe ASTM A-106.
3. Forged and Rolled Alloy steel pipe flanges, forged fittings, valves and parts - ASTM A-182.
4. Material for socket welded fittings - ASTM A-105.
5. Seamless ferrite alloy steel pipe - ASTM A-335.
6. Pipe fittings of wrought carbon steel and alloy steel - ASTM A-234.
7. Composition bronze or metal castings - ASTM B-62.
8. Seamless copper tube, bright annealed ASTM B-168.
9. Seamless copper tube - ASTM B-75.
10. Dimensions of fittings - ANSI B-16.11
11. Valves flanged and butt welding ends - ANSI B16.34.
12. Nomenclature for Instrument tube fittings ISA-RP-42.1 - 1982.

1.08.02.15 Instrument Tubing

1. Seamless carbon steel pipe - ASTM - A106.
2. Material for socket weld fittings - ASTM - A105.
3. Dimensions of fittings - ANSI B16.11
4. Code for pressure piping, welding, hydrostatic testing - ANSI B31.1.

1.08.02.16 Cables

1. Thermocouple extension wires/cables - ANSI C 96.1 - 1982.
2. Colour coding of single or multi-pair cables – VDE 0815

3. Guide for design and installation of cable systems in power generating stations (insulation, jacket materials) - IEEE Std. 422 - 1977.
4. Requirements of vertical tray flame test - IEEE 383 - 1974.
5. Standard specification for tinned soft or annealed copper wire for electrical purpose - ASTM B-33 - 81.
6. Oxygen index and temperature index test - ASTM D-2863.
7. Smoke generation test - ASTM D-2843 and ASTM E-662.
8. Acid gas generation test - IEC-754-1.
9. Swedish chimney test - SEN - 4241475 (F3)
10. Instrumentation cables and internal wiring I S-1554 (Part-I, 1976) and I S-5831(1984).
11. Standard for Control, Thermocouple Extension and Instrumentation cable - NEMA WC 57-2004 IEC 60331-2, Rev. 2, 2004)□
12. PVC insulated (heavy duty) Electric cables for working voltages upto and including 1100V - IS:1554 (Part-I)
13. Conductors for insulated electric cables and flexible cords. - IS:8130
14. PVC insulation and sheath of electric cables - IS:5831
15. Mild steel wires, strips and tapes top armoring cables - IS:3975
16. Water Immersion Test - VDE 0815
17. Drums for electric cables - IS : 1048

1.08.02.17 Cable Trays, Conduits

1. Guide for the design and installation of cable systems in power generating station (cable trays, support systems, conduits) - IEEE Std. 422, NEMA VE-1, NFPA-70-1984.
2. Guide for the design and installation of cable systems in power generating station (Cable trays, support systems, conduits) Test Standards, NEMA VE-1 - 1979.
3. Galvanising of Carbon steel cable trays - ASTM A-386-78.

1.08.02.18 Flow measurement

1. ASME Performance Test Code PTC-19.5 (2004), ISA RP3.2
2. BS 1042
3. ISO 5167

1.08.02.19 Surge Protection System

1. Surge withstand capability tests - ANSI C37.90a-1974. IEEE Std. 472 – 1974
2. IEC 61643-1:1998-02 and E DIN VDE 0675 part 6:1996-03/A2: 1996-10
3. IEC 61643-21:2000-09 and E VDE 0845 part 3-1:1999-07

1.08.02.20 Digital Video Recording & Management System (DVRMS)

1. ISO 9001 (2000)
2. ISO/IEC15504 Level3 or higher (SPICE 2.0 Software Process Improvement and Capability Determination)

3. SEICMM Level 3 or higher (American Software Engineering Institute - Capability Maturity Model)

Where:

- i) IEEE - Institute of Electrical and Electronics Engineers.
- ii) ISA - Instrument, Systems and Automation Society
- iii) NEMA - National Electrical Manufacturers Association
- iv) ANSI - American National Standards Institute
- v) NFPA - National Fire Protection Association
- vi) ASME - American Society of Mechanical Engineers
- vii) IS - Indian Standards
- viii) IEC - International Electro-technical Commission
- ix) ASTM - American Society for Testing Materials
- x) EIA - Electronic Industries Association
- xi) DIN - Deutsche Institute Normale
- xii) TIA – Telecommunication Industries Association

**I.SPECIFICATION
FOR
QUALITY ASSURANCE
&
TESTING**

CHAPTER-14

QUALITY ASSURANCE AND TESTING AND GUARANTEES

14.01.00 GENERAL REQUIREMENT

- 14.01.01** All equipment furnished under this specification shall be subject to test by authorized quality assurance personnel of the Bidder, representatives of the Owner during manufacture, erection and on completion. Bidder's quality assurance personnel for these shop and site tests shall be identified in advance and shall be acceptable to the Owner. The approval of the Owner or passing of such inspection of tests will not, however, prejudice the right of the owner to reject the equipment if it does not comply with the specifications when erected or fails to give complete satisfaction in service.
- 14.01.02** The Bidder shall furnish details of shop and site tests proposed to be conducted by him at various stages to meet the specification requirements for each type of instrument/system along with his proposal. Bidder shall also furnish details of his proposed shop and site quality assurance organization for this contract
- 14.01.03** Bidder shall prepare a detailed shop and site 'Quality Assurance Programme' to meet the requirements of these specifications for Owner's approval. This document shall also contain the formats for reports and maintenance of test records specification of test equipment to be used for site tests.
- 14.01.04** All equipment and systems furnished under this specification shall be subjected to shop & site tests in accordance with the Quality Assurance Program approved by the Owner and shall be adequate to ensure full compliance with these specification, all applicable codes & standards and detailed engineering drawings and documents approved by the Owner.
- 14.01.05** The Bidder shall provide all required test equipment and simulation devices for performing all shop and site tests. All test equipment shall be of reputed make, required accuracy class and shall be recently calibrated. The record of calibration of test equipment shall be made available to the Owner on demand.
- 14.01.06** The cost of all tests as per the requirements of this specification and approved quality assurance programme shall be included in Bidder's lump sum price for this package and no extra price shall be payable by the Owner for conducting any test as per the intent and requirements of this specification.

14.01.07 All approval/Inspection are to be carried out by the Owner only.

14.02.00 SHOP TESTS

14.02.01 General Requirement

- 14.02.01.00 Shop tests shall include all tests to be carried out at Bidder's works at of this sub-bidder and at works where raw materials used for manufacture of equipment is produced.

14.02.01.01 Individual components, instruments and devices furnished in accordance with specification sheets, and I&C device list enclosed with these specifications shall be shop tested by manufacturer prior to shipment. The manufacturer shall conduct these tests for certifying compliance with published specifications for the equipment and provide test results to the Owner in writing. These tests and test certificates shall be in accordance with the agreed 'QA' programme for major systems/equipments. However, manufacturer's standard methods shall be followed if details of tests for any equipment are not covered under this agreed 'QA Programme'.

14.02.01.02 Whenever tested quality material is specified and wherever called upon by Indian Boilers Regulations or by the design code, the test pieces are to be prepared and tested to Owner's satisfaction.

14.02.01.03 In the event of Owner being furnished with certified particulars of tests, which have been carried out by the suppliers of material, the Owner may, at his discretion, dispense with these tests.

14.02.02 Material Tests

14.02.02.01 Whenever tested quality material specified and whenever called upon by Indian Boilers Regulations or by design code, the test pieces, are to be prepared and tested to Owner's satisfaction.

14.02.02.02 In the event of Owner being furnished with certified particulars of tests, which have been carried out by the suppliers of material, the Owner may, at his discretion, dispense with these tests.

14.02.03 Test at Manufacturer's Works

14.02.03.01 Works tests are to include electrical, mechanical performance and hydraulic tests in accordance with relevant IS, IBR or any other approved standard or any other tests called for by the Owner under these specifications to ensure that the equipment being supplied fulfills the requirements of these specifications. For equipments not covered by any IS or other approved standards, the tests to be carried out shall be in accordance with Bidders' quality assurance programme approved by the Owner.

14.02.03.02 Control systems, monitoring systems, control panels, instrument enclosures, and power supply systems shall be shop tested according to unique requirements specified in the applicable section of these specifications for each item and quality assurance program approved by the owner.

14.02.03.03 All shop tests shall be performed prior to shipment and the Owner shall be given the opportunity to witness these tests. The Bidder shall notify the Owner regarding readiness for shop test at least 10 days before the scheduled date if the tests to be conducted within Indian and at least 60 days before the schedule date if the test is to be conducted abroad.

14.02.04 Factory Tests

14.02.04.01 Automatic Control and Monitoring system (DDCMIS, PLC & any other microprocessor based control system) including alarm annunciation system furnished as per this specification shall be subject to shop and site tests as per the requirements of this specification, applicable codes and Owner approved Quantity Assurance Program so as to demonstrate to the Owner that the equipment furnished by the Bidder meets the intent and requirement of this specification. These tests shall include but shall not be limited to the tests indicated in the subsequent clauses.

14.02.04.02 **Surge Protection Test for Solid State Equipment**

All solid state equipment shall be able to withstand the noise and surge inherent in a Power House, and shall strictly comply with SWC tests ANSI C 37.90A, 1974 for IEEE-472 (1974). Complete details of the features incorporated in electronic system to meet this requirement, the relevant test carried out, and the test certificates shall be submitted along with the proposal.

14.02.04.03 **Burn-in and Elevated Temperature Test**

All solid state electronic equipment shall be tested as a complete system/equipment with all devices connected for a minimum of 168 hours continuously under energized conditions prior to shipment from manufacturer's works, as per the following cycle :-

During the first 48 hours of testing the ambient temperature shall be maintained at 50 deg.C and relative humidity at 95%. The equipment shall be interconnected with all devices, which will cause it to repeatedly perform all operations; it is supposed to perform in actual service, with load on various components being equal to those, which will be experienced in actual service.

The 48 hours tests period shall be continuous but shall be divided into four 12 hours segments. The input voltage during each 12-hour segment shall be nominal voltage for 11 hours, followed by 110% of normal voltage for 30 minutes followed by 90 percent of nominal voltage for 30 minutes.

The 48 hours elevated temp test shall be followed by 120 hours of burn in test as specified in the above paragraphs except that the temperature is reduced to ambient temperature prevalent at that time. Alternatively copy of type test certificate for burn-in test shall be submitted.

14.02.04.04 The Bidder shall furnish full details regarding shop tests and site tests, as per good engineering practices. The Owner shall approve all such tests and the supplier shall conduct all such tests without calling for additional price.

The tests shall cover factory tests, burn-in and elevated temperature tests, simulation and functional tests, insulation tests as applicable, the rating of the contact devices and components, surge withstand capability test, conformity of interconnection cables, testing and checking of other conditions deemed to be necessary with the system/equipment items.

14.02.04.05 All instruments and control equipment supplied against this contract shall be factory calibrated at least at five (5) points throughout the range and checked for their

functional/performance requirements. The instruments shall also be calibrated at site prior to commissioning.

- 14.02.04.06 All panels, instruments enclosures, junction boxes, etc. shall be type tested for degree of protection and applicable in accordance with IS: 2147. 8.02.04
- 14.02.04.07 Type, routine and acceptance testing of all equipments, supplied under this contract, shall be in accordance with relevant N EEA/IS/IEC/ANSI/BS/ISA standards, in addition to the requirements of Owner approved Quality Plans. Six (6) copies of test reports shall be submitted to the Owner for approval prior to dispatch of respective equipment
- 14.02.04.08 The representative of Owner shall be given opportunity to witness the factory tests which shall be mutually finalized during the progress of the contract.
- 14.02.04.09 All control systems to be furnished for this project, shall be factory tested for circuit continuity and direction of response. The Components to be tested shall include all controllers, HAND/AUTO station, other system modules, alarm contactors and multi-conductor interconnecting cables. The tests shall be performed with all of the system components supplied by the Bidder connected to form a complete system with the sole exception of transmitters. The tests shall include a means of confirming the mathematical design response of the control system by simulating changes in system input. The tests shall be a qualitative functional test of each component of control system, which simulates dynamic inputs and monitors system outputs.
- 14.02.04.10 Certain control loops shall be factory tested using closed loop mathematical simulation techniques. Control loops to be tested by closed loop methods are broadly as under. However, owner has discretion to test and all control loops during simulation testing.
 - ii) Firing rate control (fuel and air flow control)
 - iii) Furnace draft control
 - iv) Boiler separator level control
 - (d) **Response time for Turbine Control System.**

The input simulation equipment shall be designed to produce effects from control system outputs based on mathematical model of the predicted performance and process dynamics of the main unit equipment. The control constants of various control loop components shall be adjusted to produce a stable and optimum control adjusted to produce a stable and optimum control when connected to the simulation equipment.
- 14.02.04.11 Simulation data including factory adjustment of control system constants, and simulation equations shall be tabulated and shall be made available by the Bidder for owner's use during field check out and the start up of the control system.
- 14.02.04.12 Availability of a simulated type test for automatic control loops specified with a detailed description of testing methods utilized, shall be indicated.

- 14.02.04.13 The availability of facilities for carrying out the model test for the control systems shall be indicated by the bidder. Also details of test procedures and copies of test results conducted for a similar fossil fuel fired unit shall be furnished. The data required from Boiler and Turbo generator supplies shall also be furnished by the Bidder.
- 14.02.04.14 Brief description of all tests proposed to be conducted on each control system components during various stages of manufacture, installation and commissioning shall be furnished. Copies of test data accumulated during the tests shall be submitted to the mutually agreed formats.
- 14.02.04.15 The owner shall witness the factory tests which shall be performed at a time mutually agreeable to the Bidder and the owner.

14.02.04.16 Factory Acceptance Tests for DDCMIS, DCS, Simulator & PLC

GENERAL	1	FACTORY ACCEPTANCE TEST (FAT): REF NOTE-1	✓
	2	FACTORY ACCEPTANCE TEST (FAT) PROCEDURE: REF.NOTE -2	✓
	3		
	4		
	5		
TEST REQUIREMENTS	6	TEST SHALL BE PERFORMED WITH THE COMPLETELY ASSEMBLED SYSTEM AND ALSO WITH COMPLETE	✓
	7	I&C SOFTWARE AND PERFORMING ALL FUNCTIONS EXPECTED OUT WHILE IN ACTUAL SERVICE AND	
	8	WITH STSTEM CONFIGURATION AS FINALISED.	
	9	PROCESS INPUT/OUTPUT CONDITIONS AND OTHER LOAD ON THE SYSTEM TO BE STIMULATED	✓
	10	EITHER BY HARDWARE/SOFTWARE.	
	11	ALL SYSTEM SOFTWARE and APPLICATION SOFTWARE TO BE LOADED AND OPERATIONAL ON THE	✓
	12	SYSTEM PRIOR TO FAT	
	13	FAT TO BE CONDUCTED AT ELEVATED TEMP. OF 45 DEG C FOR MINIMUM 48 HOURS	✓
	14	FAT UNDER FOUR CYCLES OF VOLTAGE FLUCTUATIONS VIZ NOMINAL AT 110 % OF RATED VOLTAGE	✓
	15	PERFORMANCE TEST:	✓
	16	-	
	17	-	
TEST DOCUMENTS	18	TOTAL SYSTEM CONFIGURATION DRAWINGS	
	19	FAT PROCEDURE CONSISTING OF:	
	20	(i) TEST EQUIPMENT	
	21	(ii) TEST ENVIRONMENT	
	22	(iii) TEST CONFIGURATION	✓
	23	(iv) TEST PROCEDURE	
	24	(v) TEST SCHEDULE	
	25	(vi) TEST VENUE	
	26	(vii) TEST REPORTS- SPECIMEN COPIES	
	27	FUNCTION DESIGN SPECIFICATION FOR EACH EQUIPMENT / SYSTEM	
	28	-	
	29	-	
PR ELIMINARY CHECKS	30	GENERAL APPEARANCE CHECK and BILL OF MATERIALS CHECK	✓
	31	CONSTRUCTION CHECK AS PER OVER ALL GENERAL ARRANGEMENT DRAWINGS	✓
	32	DIMENSIONAL CHECK	✓
	33	LABELLING, TERMINAL ARRANGEMENT AND EQUIPMENT IDENTIFICATION CHECK	✓
	34	POWER SUPPLY VOLTAGE LEVEL CHECK and POWER 'LEDs -ON CHECK	✓
	35	COOLING FAN OPERATION CHECK	✓
	36	GROUNDING NETWORK CHECK	✓
TE M	1	POWER SUPPLY UNDER VOLTAGE AND OVER VOLTAGE CHECK ($\pm 10\%$)	✓
	2	PROCESSOR and MAIN DATA BUS NETWORK REDUNDANCY CHECK, IF APPLICABLE	✓
	3	COMMUNICATION COUPLER IF APPLICABLE REDUNDANCY CHECK	✓
	4	COMMUNICATION MODULE OF THE CONTROLLER TO NETWORK REDUNDANCY CHECK, IF APPLICABLE	✓
	5	POWER SUPPLY REDUNDANCY CHECK	✓
	6	HARDWARE ON-LINE MAINTAINABILITY CHECK,	✓
	7	-	
	8	-	
CONTROL ENGINEERING	9	CLOSED LOOP CONTROL SIMULATION CHECK	✓
	10	OPEN LOOP CONTROL SIMULATION CHECK	✓
	11	CONTROL LOOP RESPONSE CHECK	✓
	12	BUMPLESS AUTO MANUAL TRANSFER CHECK	✓
	13	OPERATING STATION - GRAPHIC OVERVIEW CHECK	✓
	14	OPERATING STATION- TREND CHECK	✓
	15	OPERATING STATION- REAL TIME TREND CHECK	✓
	16	OPERATING STATION- MIMICS CHECK	✓
	17	OPERATING STATION- CHECK FOR OPERATING CONTROL DIRECTLY FROM MIMICS	✓
	18	OPERATING STATION- FUNCTION KEYS CHECK	✓
	19	OPERATING STATION- TOUCH SCREEN FUNCTION CHECK	✓
	20	OPERATING STATION- ANALOG CONTROL DISPLAY CHECK	✓
	21	OPERATING STATION- SEQUENCE CONTROL DISPLAY CHECK	✓
	22	OPERATING STATION- OPERATOR GUIDANCE MESSAGE CHECK	✓
	23	OPERATING STATION- ALARM MANAGEMENT FUNCTION CHECK	✓

	24	OPERATING STATION LOGGING FUNCTION CHECK	✓
	25	OPERATING STATION / RESPONSE / UPDATING CHECK	✓
	26	KEYBOARD LOCK FUNCTION CHECK	✓
	27	OPERATING STATION INTERCHANGEABILITY and ASSIGNABILITY CHECK	✓
	28	PRINTER ASSIGNABILITY and BACK-UP FUNCTION CHECK	✓
	29	FLOPPY DISK/ STD / OPTICAL DISK UNIT STORAGE and RETRIEVAL CHECK	✓
	30	OPERATING STATION ASSIGNABILITY CHECK FOR HARD COPIER FUNCTION	✓
	31	PLANT PERFORMANCE CALCULATION CHECK	✓
	32	COMMUNICATION INTERFACE TO OTHER'S SYSTEM SIMULATION CHECK	✓
	33	-	
M A I N T E N A N C E	34	DATA BUS DISTANCE BUILDING CHECK (REFER NOTE- 3)	✓
	35	GRAPHIC DISPLAY BUILDING FUNCTION CHECK	✓
	36	CLOSED LOOP CONTROL SYSTEM MODIFICATION CHECK	✓
	37	OPEN LOOP CONTROL SYSTEM MODIFICATION CHECK	✓
	38	ALARM DISPLAY PRIORITISATION CHECK	✓
	39	SYSTEM SECURITY CHECK	✓
	40	SYSTEM ALARM CHECK	✓
	41	SYSTEM DIAGNOSTIC FUNCTION CHECK	✓
	42	POINT DETAIL CONFIGURATION CHECK	✓
	43	CONTROL LOOP TUNING CHECK	✓
N O T E S	44	SYSTEM SELF DOCUMENTATION CHECK	✓
	1. THE INTENT OF THE FAT IS TO DEMONSTRATE AND ENSURE THAT THE I&C SYSTEM MEETS ALL THE FUNCTIONAL REQUIREMENTS AS INTENDED IN THE SPECIFICATION / CONTRACT. A COMPLETED INTEGRATED TEST OF THE SYSTEM SHALL BE CARRIED OUT AT VENDOR'S WORKS IN THE PRESENCE OF OWNER, ON COMPLETION OF INTEGRATION/MANUFACTURING OF THE SYSTEM. THE SHIPMENT OF I&C EQUIPMENT TO SITE WILL BE EFFECTED ONLY AFTER THE FAT HAS BEEN ACCEPTED BY THE OWNER.		
	2. FAT PROCEDURE SHALL BE PREPARED BY VENDOR AND TO BE SUBMITTED FOR OWNER'S/ APPROVAL WELL IN ADVANCE PRIOR TO THE COMMENCEMENT OF FAT		
	3. FAT SHALL BE CONDUCTED WITH THE DISTANCE BETWEEN THE PROCESSOR AND OTHER SUPPORTING PERIPHERALS AS PER THE FINAL LAYOUT IN THE CONTROL ROOM.		
	4. ALL THE RELEVANT APPROVED DOCUMENTS REQUIRED FOR FAT SHALL BE SUBMITTED BY THE BIDDER IN ADVANCE PRIOR TO COMMENCEMENT OF FAT.		

14.02.04.17 Tests to be performed during FAT of PLC system

Following minimum tests shall be performed during FAT at manufacturer's place of PLC system:

- 1) Hardware Inspection of PLC Sub System
 - i) Heat run test
 - ii) Hardware check / physical software package check
 - iii) I/O loading specification
 - iv) PLC start-up and power fail restart
 - v) PLC processor back-up function
 - vi) Communication redundancy
- 2) Application Inspection for Logic Functions
 - i) Ladder logic functional check and graphic screen check
- 3) Application Inspection for PLC Panels
 - i) General arrangement
 - ii) Appearance and construction
 - iii) Panel wiring
 - iv) Panel functional check
 - v) Power supply redundancy check

- 4) PLC System Checks
- i) PLC Scan time functional test
 - ii) PLC/IO panel/Engineering station functions
 - iii) Diagnostic and process alarm test
 - iv) Controller redundancy test
 - v. I/O cards redundancy test.
 - vi) Controller loading test

In addition to above test, Bidder shall also perform other tests as per approved QAP & FAT procedure. Also bidder shall submit "Type Test" report as per IEC – 61131.2 along with FAT report for PLC.

14.02.04.19 FACTORY ACCEPTANCE TEST FOR SIMULATOR

Factory Acceptance Test (FAT) shall include all required tests to fully demonstrate to Owner's satisfaction that each equipment/sub-system/system software modules etc. furnished as per this specification, as well as Simulator as a whole, fully meets the functional, parametric and other requirements of this specification and Owner's approved drawings/documents under all operating regimes.

Bidder to note that FAT procedure given below in subsequent clauses are only indicative in order to help the Bidder in understanding the requirements and help him in submitting a detailed procedure based on these guidelines meeting all the specification requirements.

The Bidder shall also carry out the tests included in subsequent clause as pre FAT and submit its results before inviting Owner for FAT.

The Factory Acceptance Test (FAT) shall include all reasonable exercises, which the combination of equipment and software can be expected to perform. These tests shall be divided into, as a minimum, but not limited to the following categories:

- i. Pre power on checks
- ii. Power on check
- iii. Hardware tests
- iv. Functional tests
- v. Parametric tests
- vi. Specific tests on Electronic hardware

14.02.04.19.1 The major Functional Tests shall include but not limited to the following:

- a) Verification of individual modules in line with approved documents.
- b) Verification of adherence to parameters for various plant configurations at different initial conditions.
- c) **Functional test for C&I Model**

Verification of proper realization of Control and Logic functions as per input documents and approved functional design specification (FDS).

d) Functional tests for HMIPIS

- i. Verification of all types of displays, logs including their formats, bar graphs, X-Y plots etc. Verification of all function keys on keyboards and availability of all operator functions.
- ii. Verification of event generation and handling capabilities of HMIPIS processors by simulating various types of events / data and observing associated event sequence display and alarm signaling boxes.
- iii. Calculations:

All calculations shall be tested to demonstrate that these are in accordance with the specification and I/O schedule. The Bidder shall prepare all test cases for calculations (3 for each calculation at low, mid and upper ranges of inputs) and submit them for the owner's approval. Test cases shall include performance calculations, flow and level calculations, pressure and temperature compensations, etc.
- iv. Checking historical storage and retrieval functions including long-term storage.
- v. Checking healthiness of processor, main memory. Testing of initialization and loading of configuration data, etc.
- vi. Verification of all programmers' stations functions for HMIPIS and Control System, as well as for documentation facility as specified.
- vii. Various display response time / System accuracy etc.
- viii. Display update time on OWS

e) Functional test for networking & communication devices

- i. Verification of various features as per approved documents.
- ii. Verification of throughput after creating high communication traffic.

f) Instructor's workstation Functions

Verification of all features of instructor functions like malfunction, initial conditions, snapshots, trainee exercises etc. in line with specification & approved documentation.

g) Programming and Documentation functions

- i. Verification of all programming function like, modification of application software, database, administrator's function etc. in line with specification and approved documents.
- ii. Verification of all documentation functions in line with specification and approved documents.

14.02.04.19.2 FAT Procedure

The Bidder shall submit a detailed FAT procedure for owner's approval during detailed engineering stage based on the above guidelines. The FAT procedure to be submitted by the Bidder shall be detailed and exhaustive enough such that owner is satisfied that all the Simulator System specification requirements and features are being tested and the system meets these requirements.

14.02.04.20 Tests to be performed during FAT of Peripherals & other control system

1. Colour Graphic Video Display Unit (OWS)
 - i. Functional tests (As per FAT procedure. Note-1)
 - ii. Test for capabilities of OWS including error detection for the complete system (Both hardware & software) simulating worst conditions
 - iii. Noise test
 - iv. Surge withstanding capacity as per IEEE or equivalent
 - v. Quality assurance as governed by BS 5750 or equivalent
 - vi. Design, construction, components, finishes and testing of electronic equipment as per EES-1980 (General specification of electronic equipment) or equivalent

Note-1: Test to be witnessed by Owner.
2. Keyboard
 - i. Test for satisfactory operation of keyboard controls, push buttons and all associated functions (As per FAT procedure. Note-1)
 - ii. Quality assurance as governed by BS 5750 or equivalent for functional test for the complete system simulating worst conditions
 - iii. Design, construction, components, finishes and testing of electronic equipment as per EES-1980 (General specification of electronic equipment) or equivalent

Note-1: Test to be witnessed by Owner.
3. Printers
 - i. Noise level test for the printer
 - ii. Test of interlock performance and error detection feature.
 - iii. Quality assurance as governed by BS 5750 or equivalent
 - iv. Design, construction, components, finishes and testing of electronic equipment as per EES-1980 (General specification of electronic equipment) or equivalent

4. Floppy / Tape Drive Unit / Bulk Memory Unit / DVD, CD drive Unit / DAT Drive
 - i. Noise test
 - ii. Surge withstanding capacity as per IEEE or equivalent
 - iii. Quality assurance as governed by BS 5750 or equivalent
 - iv. Design, construction, components, finishes and testing of electronic equipment as per EES-1980 (General specification of electronic equipment) or equivalent
 - v. Test of Control unit and drive for all features, date checking features.
5. Vibration Monitoring & Analysis System
 - i. Simulated functional test (Note-1)
 - ii. Tests for server, LED monitor, Printer, Keyboard

Note-1: Test to be witnessed by Owner.
6. PADO (Performance & Optimization System)
 - i. Simulated functional test (Note-1)
 - ii. Tests for server, LED monitor, Printer, Keyboard

Note-1: Test to be witnessed by Owner.
7. ERP System
 - i. Simulated functional test (Note-1)
 - ii. Tests for server, LED monitor, Printer, Keyboard

Note-1: Test to be witnessed by Owner.
8. MIS System
 - i. Simulated functional test (Note-1)
 - ii. Tests for server, LED monitor, Printer, Keyboard

Note-1: Test to be witnessed by Owner.
9. HMS System
 - i. Simulated functional test (Note-1)
 - ii. Tests for server, LED monitor, Printer, Keyboard

Note-1: Test to be witnessed by Owner.

NOTES:

1. The intent of the FAT is to demonstrate and ensure that the I & C system meets all the functional requirements as intended in the specification / contract. A completed integrated test of the system shall be carried out at vendor's works in the presence of Owner or Owner's representative, on

completion of integration / manufacturing of the system. The shipment of I&C equipment to site will be effected only after the FAT has been accepted by Owner.

2. FAT procedure shall be prepared by vendor and to be submitted for Owners approval well in advance prior to the commencement of FAT.

14.02.04.21 Calibration of Instruments

The Bidder shall carry out the calibration of instruments as indicated below by submitting the test procedure and quality assurance plan for the Owner's approval. Bidder shall also prepare detailed checklist/calibration sheets for each of the systems/equipment clearly indicating the step-by-step procedures to be carried out for calibration pre commissioning, loop checking, powering and commissioning.

The calibration of all instruments shall be checked and calibration records prepared for the Owner's use. If the instruments require recalibration, Bidder shall recalibrate the instruments and revise the calibration records and submit to the Owner.

i TESTS TO BE PERFORMED FOR FIELD INSTRUMENTS

1.	Pressure Gauges
	Calibration Hydro test (1.5 times max. pr.)
2.	Pressure switches
	Calibration test / Hydro test / Contact rating test / Accuracy test / Repeatability
3.	Differential Pressure Gauges
	Calibration test / Hydro test / Leak test / Over range test / Accuracy test / Repeatability test.
4.	Differential Pressure Switches
	Calibration test / Hydro test / Contact rating test / Leak test / Accuracy test / Repeatability test.
5.	Thermometers
	Calibration / Material test / Accuracy test / Bore concentricity : $\pm 5\%$ of wall thickness / Hydrostatic test for TW (1.5 times max. pr.)
6.	Temperature switch
	Calibration / Material test / Accuracy test / Bore concentricity : 1.5% of wall thickness / Hydrostatic test for TW (1.5 times max. pr.) / Contact rating test.
7.	Resistance temperature detector assembly.
	Calibration / Material test / Bore concentricity test / Insulation test ($\leq 500 \text{ M}\Omega$ at 500V DC) as per ISA, Hydro test for TW. Bore concentricity: $\pm 5\%$ of wall thickness, Accuracy test.
8.	Thermocouple assembly
	Calibration / Material test, Insulation test ($\geq 500 \Omega$ at 500 V, DC) as per ISA, Hydro static test (1.5 times max. pr.), Bore concentricity : $\pm 5\%$ of wall thickness.
9.	Thermowells
	Material test / Bore concentricity : $\pm 5\%$ of wall thickness / Hydrostatic test for TW (1.5 times max. pr.)

10.	Level Guages
	Hydrostatic test / Material test / Seat leakage test / Ball check test.
11.	Level switches (Magnetic)
	Material test / Contact rating test / Hydro test / Calibration test.
12.	Flow Switch
	Material test / Hydro static test (1.5 times max. pr.) / function test.
13.	Flow glasses
	Material test / Hydrostatic test (1.5 times max. pr.) / function test.
14.	Variable area flow meters
	Calibration test / Material test / Hydrostatic test (1.5 times max. pr.)
15.	Flow element
	100% Radiography test / Hydro test / Calibration test, IBR Certificate.
	Calibration test for flow element shall be witnessed by Owner.
16.	Control valves/Pneumatic block valve/Pressure regulating valve – Refer chapter 11.
17.	Position transmitters
	Calibration / hysteresis and Accuracy test
18.	Electro Pneumatic Convertors
	Calibration test / Accuracy test
19.	Solenoid valves
	Hydrotest / Seat leakage test / CV test / Coil insulation test
20.	Air filter regulators
	Calibration test / Accuracy test
21.	Junction Boxes
	Test for degree of protection / Material test
22.	Tests for terminal blocks
	Test for moulding for flame resistant, Non-hygroscopic and Decarbonised / Insulation test between terminals / Insulation between terminal block and frame.
23.	Thermocouple extension cable
	Thermo-emf characteristic / Continuity test / Measurement on capacitance, inductance and loop resistance / Insulation resistance / High voltage test as per latest IS / Tensile and elongation test / Oxygen index test / Any other test applicable.
24.	Mass flow meter
	Performance test / Calibration test / Hydrostatic test.
25.	Boiler Level Gauge
	Hydrostatic test / Material test / Seat leakage test / IBR Certificate
26.	pH/Conductivity measurement / Silica / Dissolved oxygen analysers:
	Calibration test, Accuracy test
27.	Sample cooler :

	Hydro test, IBR Certificate
28.	Sampling racks :
	Hydro test, IBR Certificate for tubes and fittings.
29.	S02 / Nox analyser / SPM analyser:
	Calibration test, accuracy test
30.	Interposing relay
	Functional test, temperature rise test, H.V test, Insulation test
31.	Transmitter Racks :
	Hydro test, air leak test for piping / tubing and fittings. IBR certification as required for tubing / piping and fittings.
32.	Pressure Transmitter
	Calibration test / Hydro test / Leak test / Over range test / Accuracy test / Repeatability test.
33.	Differential pressure transmitter
	Calibration test / Hydro test / Leak test / Over range test / Accuracy test / Repeatability test.
34.	Temperature Transmitter
	Calibration test / Accuracy test / Ambient temperature error test
35	Pneumatic Block Valves
	a) IBR certificate form III C b) Hydrostatic test : ANSI B 16.34 c) Seat leakage test : As per ANSI B 16-104 d) CV test: As per ISA procedure e) Magnetic particle test ANSI B 16.34 special class (applicable for pr.>70 bar & temp< 400 DegC) f) Liquid penetration test: ANSI B 16.34 special class (applicable for pr.>70 bar & temp< 400 DegC) g) Radiography test: ANSI B 16.34 special class h) Calibration and Hysteresis test i) Actuator leakage test
36.	Pressure Regulating Valve

	a) IBR certificate form III C b) Hydrostatic test : ANSI B 16.34 c) Seat leakage test : As per ANSI B 16-104 d) CV test: As per ISA procedure e) Magnetic particle test ANSI B 16.34 special class (applicable for pr.>70 bar & temp< 400 DegC) f) Liquid penetration test: ANSI B 16.34 special class (applicable for pr.>70 bar & temp< 400 DegC) g) Radiography test: ANSI B 16.34 special class h) Calibration and Hysteresis test i) Actuator leakage test
37.	Local Panels : Visual inspection, wiring & continuity check, H.V. and I.R. tests on panels, checking of bill of materials, functional tests.
38	Wiring Termination & Accessories
	Routine test: Conductor resistance test/High voltage test/Impulse dielectric test/insulation test/Humidity test/Temperature rise test on power circuits/short time current test on power circuits.
	Type test:Annealing test/Test for insulation and sheath/ Flame retardance test - a) Oxygen index, b) Flammability / Test for acid gas generation/test for water absorption/wet dielectric test
39	Marshalling/System cabinets
	Verification of degree of protection/Electrical tests as detailed under wiring Termination& accessories/Type test and routine test as per relevant Indian standards.
	Notes:
	1. Test Certificates in addition to inspection at manufacturers works shall be furnished for all the instruments for Owner's review.
	2. Above Test to be witnessed shall be finalized by Owner.
	3. In addition to above test, test as per approved QAP shall also be witnessed by owner.

17.02.05 TYPE TESTING

The BIDDER shall furnish the Type test reports of all type tests as per relevant standards and codes. As well as other specific tests indicated in the specification. A list of such tests are given for various equipment in the table titled, TYPE TEST REQUIREMENT FOR C&I SYSTEM and under the item special requirement for solid state requirements/systems. For the balance equipments/instruments, type test may be conducted as per manufacturer standards or if required by relevant standards.

A. Out of these tests listed, the bidder/subvendor/manufacturer is required

to conduct certain type test specifically for this contract (and witnessed by employer or his authorized representative). Even if the same have been conducted earlier as clearly indicated subsequently such tests.

- B. For the rest, submission of type test, results, and certificates shall be acceptable provided following points
- i. The same have been carried out by the bidder/ subvendor on exactly the same model/rating of equipment. (For control valves this shall be same size, type & design).
 - ii. There has been no change in the components from the offered equipments and tested equipments.
 - iii. The test has been carried out as per the latest standards along with amendments as on the date of bid opening.
- C. In case the approved equipment is different from the one on which the type test had been conducted earlier or any of the above grounds, then the tests have to be repeated and the cost of such tests shall be borne by the bidder/sub-vendor within the quoted price and no extra cost will be payable by the owner on this account.

17.02.05.1 As mentioned against certain items, the test certificates for some of the items shall be reviewed and approved by the main bidder or his authorized representative and balanced have to be approved by the employer.

The schedule of conduction of type test/submission of reports shall be submitted and finalized during pre award discussion.

17.02.05.2 For the type test to be conducted, bidder shall submit detailed test procedure for approval by owner. This shall clearly specify test setup, instruments to be used, procedure, acceptance norms (wherever applicable), recording of different parameters, intervals of recording precaution to be taken etc. for the test to be carried out.

17.02.05.3 SPECIAL REQUIREMENTS FOR SOLID STATE EQUIPEMNTS /SYSTEMS

The minimum type test report, over and above the requirements of above clause which are to be submitted for each of the major C&I systems like DDCMIS, DCS, PLC etc shall be as indicated below:

- i. Surge Withstand Capability (SWC) for solid state equipments/equipments

All solid state systems/equipments shall be able to withstand the electrical noise and the surges as encountered in actual service conditions and inherent in the power plant. All the solid states systems /equipments shall be provided with all required protection that needs the surge withstand capability as defined in ANSI 37.90.1/IEEE 472. Hence, all front end cards which receive external signals like analog input and output modules, Binary input and output modules etc including power supply, data highway, data links shall be provided with protection that meets the surge withstand capability as

defined in ANSI 37.90.1/IEEE 472. Complete details of the features incorporated in the electronic system to meet this requirement the relevant test carried out, the test certificates, etc shall be submitted along with the proposal. As an alternative to the above, suitable class of EN 61000-4-12 which is equivalent to ANSI 37.90.1/IEEE 472 may also be adapted for SWC test.

- ii. The dry heat test as per IEC-68-2-2 or equivalent
- iii. Damp heat test as per IEC 68-2-3 or equivalent
- iv. Vibration test as per IEC 68-2-6 or equivalent
- v. Electrostatic Discharge test as per EN 61000-4-2 or equivalent
- vi. Radio frequency immunity test as per EN 61000-4-6 or equivalent
- vii. Electromagnetic Field Immunity test as per EN 61000-4-3 or equivalent

Test listed at Item no v, vi, vii above are applicable for electronic cards only as defined under item no. (i) above

17.02.05.4 **TYPE TEST REQUIREMENTS FOR C&I SYSTEMS**

S.No.	Item	Test requirement	Standard	Test to be specifically conducted	Owner's Approval required on Test Certificate
1	Electrical metering instruments	As per standards	IS 1248	No	Yes
2	Thermocouple	Degree of Protection Test	IS - 13947	No	No.
3	Junction Box	Degree of Protection Test	IS - 13947	Yes	Yes
4	RTD	As per standards	IEC-60751	No	No
5	Electronic Transmitter	As per standards	BS 6447/ IEC 60770	No	Yes
6	E/P convertor	As per standards	Manufacturing standard	No	Yes
7	Instrumentation cable (Twisted and shielded) (Refer Vol. V, Chapter 9)				
8	Battery	As per standard	IS 10918	Yes	YES
9.	Voltage stabiliser	Over load test	Approved procedure	No	YES
		Temp. rise test without redundant fans	Approved procedure	No	YES
		Input voltage variation test	Approved procedure	No	YES
10	DDCMIS				
	CLCS	Model Test	Approved	No	No

	system		procedure		
	BMS & MFT	Safety requirement	VDE 0116, SEC 8.7	No	YES
11	Conductivity type level switch	Degree of protection test	IS 13947	No	No
12	Local gauges	Degree of protection test	IS 13947	No	No
13	Process actuated switches	Degree of protection test	IS 13947	No	No
14	Control valves	CV test	ISA 75.02	No	YES
15	PLCs	As per Standard	IEC 1131	No	YES
16	LIE/LIR	Degree of protection test	IS 13947	YES	YES
17	Flue gas O ₂ analyser, other Flue gas Analysers	Degree of protection test	IS 13947	No	YES
18	Flow nozzles & Orifice plates	calibration	ASME PT C BS 1042	YES	YES

Note:

Type test are to be conducted only for the items, which are being supplied as part of this package.


- A. For batteries with electric power supply system of main plant C&I, the bidder shall submit for owner's approval the reports of all the type tests as per IS-10918 carried out within last 5 years from the date of bid opening and the test should have been either conducted at an independent laboratory or should have been witnessed by a owner/client. The complete type test report shall be for any rating of battery in a particular group, based on plate dimensions being manufactured by supplier.

For batteries with electric power system of auxiliary plants, type test reports for batteries shall be as per standard –practice of manufacturer.

14.02.06 Testing at Site [Prior to commercial operation]

- a. All equipment shall be checked thoroughly in respect of the following:
 - i. Visual and mechanical testing
 - ii. Complete system configuration loading functions; system diagnostics; system proper operation specified power supply specifications.

L.DRAWINGS

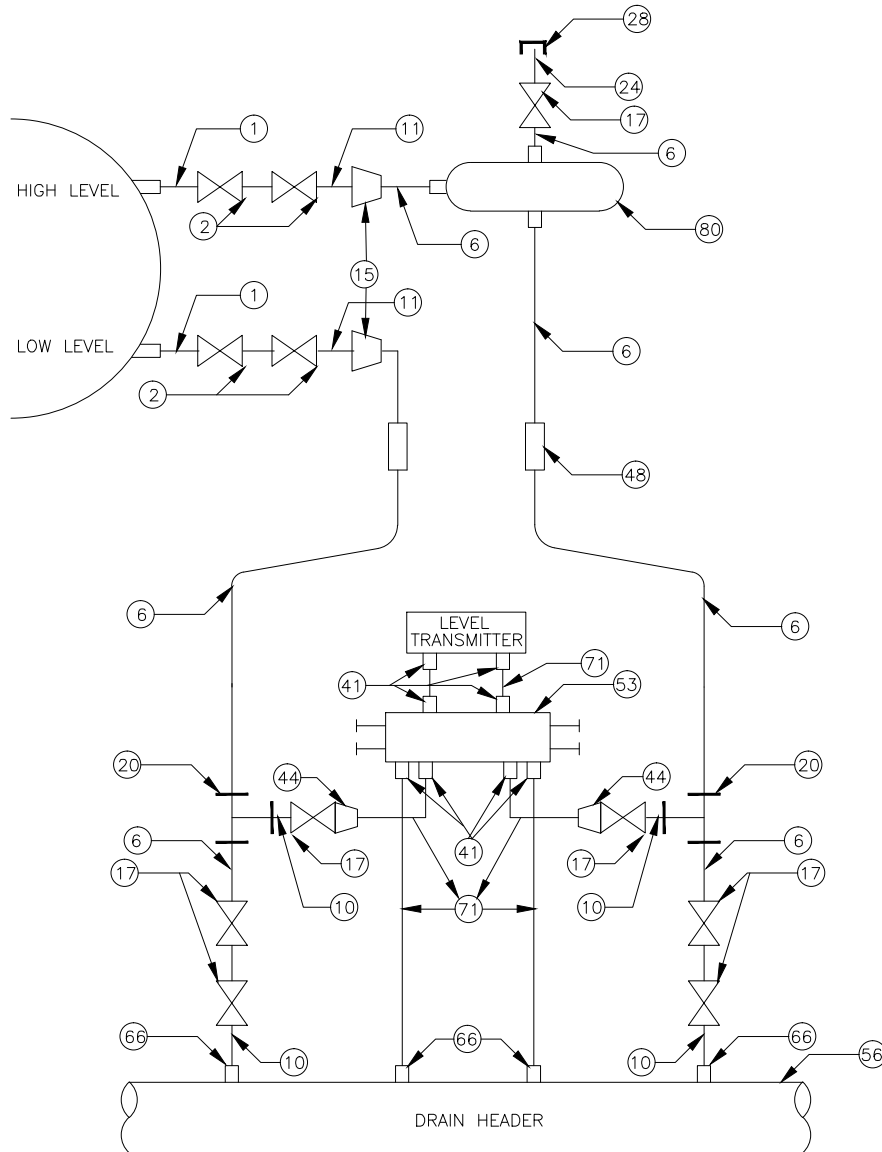

TAG NO.	DESCRIPTION	BOM
80	CONDENSATION CHAMBER	1
71	1/2"OD IMPULSE TUBE, SS-316	AS REQD.
66	1/2" GI SOCKET / FUNNEL	4
56	2"NB GI DRAIN HEADER	AS REQD.
53	5-VALVE MANIFOLD, SS-316	1
48	1/2" SW, CS/AS BULK HEAD PIPE UNION	2
44	1/2"BWx1/2"OD COMPRESSION TUBE FITTING,SS-316	2
41	1/2"NPT(M)x1/2"OD TUBE COMPRESSION FITTING,SS-316	8
28	1/2" NPT (F) CS CAP	1
24	1/2" NPS SCH-80/160x1/2"NPT(M) CS/AS NIPPLE	1
20	1/2" SOCKET WELDED EQUAL TEE CS/AS	2
17	1/2" SOCKET WELDED CS GLOBE VALVE	7
15	1"TO 1/2" SOCKET WELD REDUCER	2
11	1" NPS SCH 80/160 CS/AS NIPPLE	2
10	1/2" NPS SCH 80/160,CS/AS NIPPLE	4
6	1/2" NPS SCH 80/160 CS/AS PIPE	AS REQD.
2	1/2"/3/4"/1" SOCKET WELDED GLOBE VLV/ROOT VLV.	4
1	1/2" NPS SCH 80 NIPPLES OF MATERIAL SAME AS MAIN PIPE WITH NECESSARY ATTACH TO FLANGES	AS REQD.
TAG NO.	DESCRIPTION	BOM

NOTE:-

- FOR HIGH TEMP. SERVICE (MORE THAN 80°C)
A 'U' TUBE(REF. DWG NO. 114-04-0100) SHALL BE PROVIDED BETWEEN THE MANIFOLD AND THE TRANSMITTER
- FOR HIGH PR.(MORE THAN 40kg/sqcm) ONE NO. OF ISOLATING VLV. IS PROVIDED IN EACH LINE BETWEEN VLV. MANIFOLD AND 1/2"SW EQUAL TEE AND 2NO. DRAIN VLV. ARE ALSO

TRANSMITTER MOUNTED BELOW INST. SOURCE POINT

11	REFERENCE DRAWINGS.	NOTES	NOTICE	6	5	4	3	2	1
10		1. DO NOT SCALE, ASK WHEN IN DOUBT.		5					
9		2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.		4					
8		3. BULK HEAD FITTING SW TYPE SHALL BE PROVIDED AT LIE/LIR		3					
7		4. ABOVE DRAWING IS FOR BASIC GUIDE LINE TO BE MET BY BIDDER.		2					
6		ANY FURTHER IMPROVEMENT DURING DETAILED ENGINEERING SHALL		1					
5		ALSO BE CONFIRMED/PROVIDED BY CONTRACTOR.		0					
4		5. QUANTITIES OF INSTRUMENTS/ ERECTION HARDWARE SHALL BE		0					
3		AS PER NIT AND AS FINALISED DURING DETAIL ENGINEERING		0					
2		6. FOR DW PLANT MATERIAL OF ERECTION HARDWARE SHALL BE		0					
1		SS 316 ONLY.		0					
SE	No. PARTY			ZONE	MARK				
PRINT DISTRIBUTION									
12	11	10	9	8	7	6	5	4	3


REVISIONS	APPROVED	FOR BID PURPOSE ONLY:

DATE	CIVIL	MECH.	ELEC.	C&I	H.O.D.
25.04.13					SLN

CLIENT:	TAMILNADU GEN. & DIST. CORPORATION
PROJECT:	2x630MW ENHORE SEZ COAL BASED SUPERCRITICAL THERMAL POWER PROJECT AT ASH DYKE OF NCTPS, CHENNAI.
TITLE :-	INST. DRAWING FOR LEVEL TRANSMITTERS

CAD/DRAWN	NAME	SIGN.	DATE
DESIGNED	VIKAS		23.04.13
CHECKED	SKM/SN		23.04.13
SCALE	N.T.S.		24.04.13
JOB. No.	D-4027		
DWG.No.	114-04-0110		
Sheet No.	13		

REV.	DATE
0	23.04.13

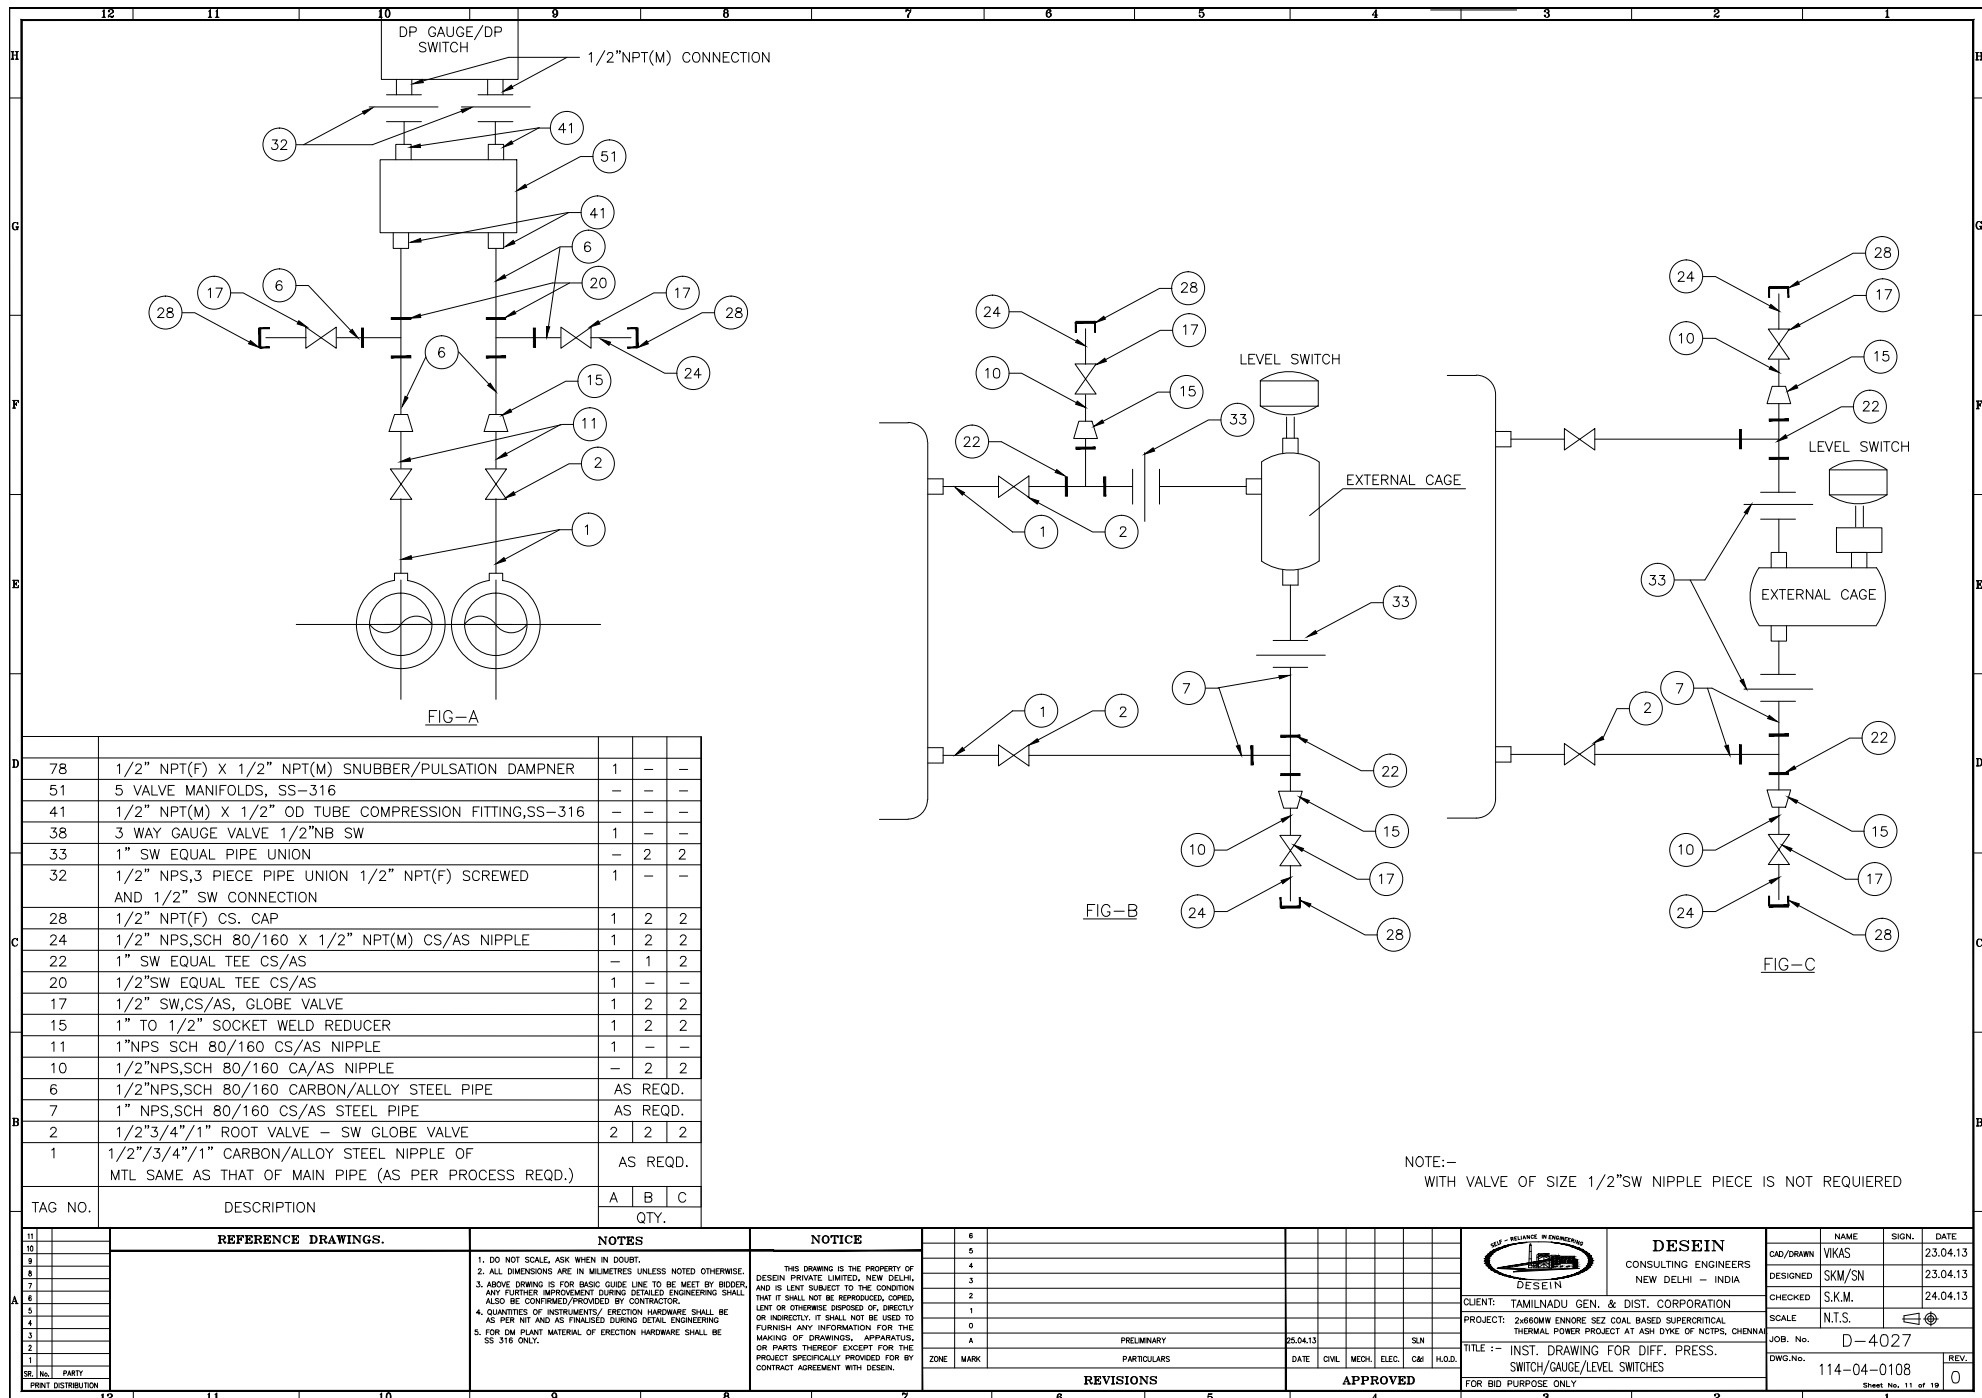

NOTE:-

1. FOR HIGH TEMP. SERVICE (MORE THAN *80C) A 'U'-TUBE / SYPHON (REF. DWG NO. IN-114-04-0100) SHALL BE PROVIDED BETWEEN THE MANIFOLD AND THE TRANSMITTER/SWITCH
2. WITH ROOT VLV. OF SIZE 1/2"SW NIPPLE PIECE AND 1 TO 1/2"SW REDUCER IS NOT REQUIRED
3. FOR HIGH PR.(MORE THAN 40Kg/sqcm) ONE ISOLATING VLV. IS PROVIDED IN EACH LINE BETWEEN VLV. MANIFOLD AND 1/2"SW EQUAL TEE AND 2.NOS DRAIN VLV. ARE ALSO PROVIDED.

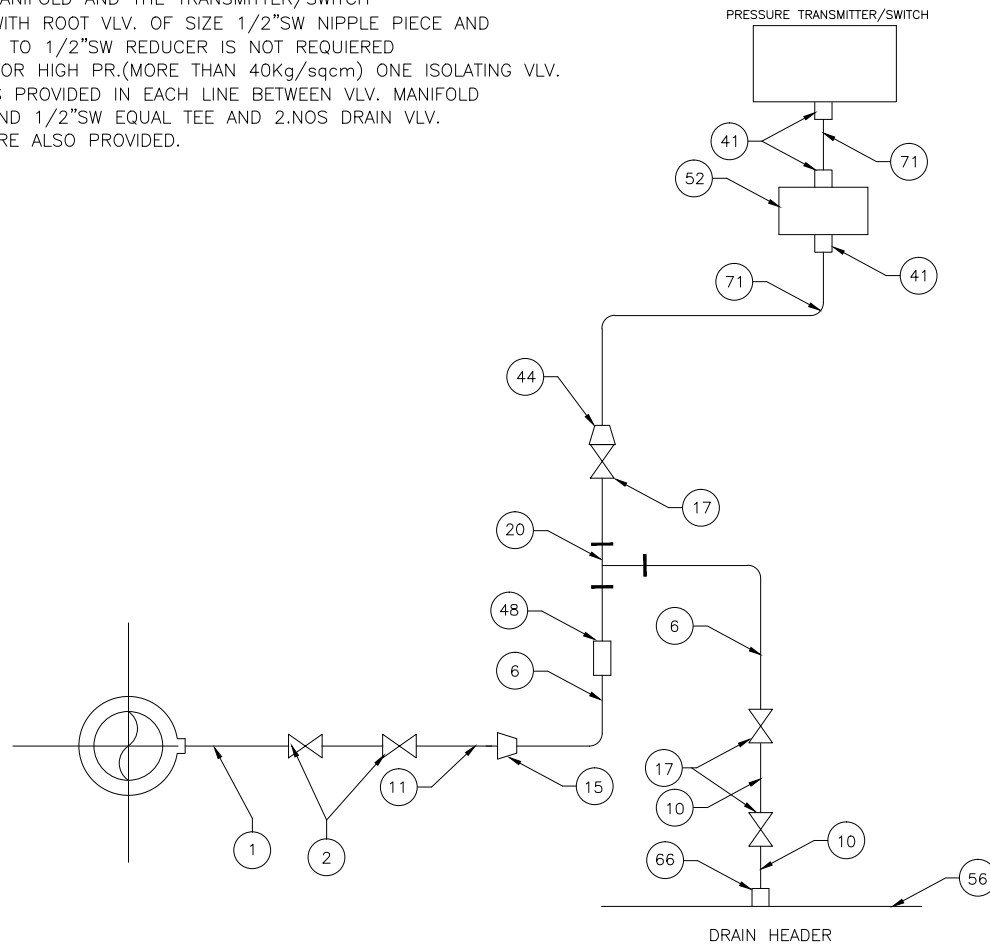
TRANSMITTER MOUNTED ABOVE
INSTRUMENT SOURCE POINT

FIG-D



TRANSMITTER MOUNTED ABOVE
INSTRUMENT SOURCE POINT

FIG-C

71	1/2"OD IMPULSE TUBE,SS-316	AS REQD.
66	1/2" GI SOCKET	1 1
56	2"NB GI DRAIN HEADER	
52	5/3/2-VALVE MANIFOLDS,SS-316	1 1
48	1/2"SW,CS/AS BULK HEAD PIPE UNION	1 1
44	1/2"BW X 1/2"OD COMPRESSION TUBE FITTING,SS-316	1 1
41	1/2"NPT(M) X 1/2"OD TUBE COMPRESSION FITTING,SS-316	3 3
20	1/2"SW EQUAL TEE,CS	1 1
17	1/2" SW,CS GLOBE VALVE / NEEDLE VALVE	3 3
15	1" TO 1/2" SW REDUCER	1 1
11	1" NPS SCH-80 CS/AS NIPPLE	1 1
10	1/2" NPS,SCH 80/160, CS/AS NIPPLE	2 2
6	1/2" NPS. SCH-80/160 CS/ AS PIPE	AS REQD.
2	1/2"/3/4"/1" ROOT VALVE	2 2
1	1/2"/3/4"/1" CARBON/ALLOY STEEL NIPPLE OF MTL. SAME AS THAT OF MAIN PIPE(AS PER PROCESS REQD.)	AS REQD.
TAG NO.	DESCRIPTION	C D QTY.

BILL OF MATERIAL


11	10	9	8	7	6	5	4	3	2	1
11	10	9	8	7	6	5	4	3	2	1
10	9	8	7	6	5	4	3	2	1	
9	8	7	6	5	4	3	2	1		
8	7	6	5	4	3	2	1			
7	6	5	4	3	2	1				
6	5	4	3	2	1					
5	4	3	2	1						
4	3	2	1							
3	2	1								
2	1									
1										
SE. No.	PARTY									
PRINT DISTRIBUTION										
REFERENCE DRAWINGS.										
NOTES										
NOTICE										
1. DO NOT SCALE, ASK WHEN IN DOUBT. 2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE. 3. BULK HEAD FITTING SW TYPE SHALL BE PROVIDED AT LIE/LIR. 4. ABOVE DRAWING IS FOR BASIC GUIDE LINE TO BE MET BY BIDDER, ANY FURTHER IMPROVEMENT DURING DETAILED ENGINEERING SHALL ALSO BE CONFIRMED/PROVIDED BY CONTRACTOR. 5. QUANTITIES OF INSTRUMENTS/ ERECTION HARDWARE SHALL BE AS PER NIT AND AS FINALISED DURING DETAIL ENGINEERING. 6. FOR DW PLANT MATERIAL OF ERECTION HARDWARE SHALL BE SS 316 ONLY.										
THIS DRAWING IS THE PROPERTY OF DESEIN PRIVATE LIMITED, NEW DELHI, AND IS LENT SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL NOT BE USED TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, APPARATUS, OR PARTS THEREOF EXCEPT FOR THE PROJECT SPECIFICALLY PROVIDED FOR BY CONTRACT AGREEMENT WITH DESEIN.										
PRELIMINARY 25.04.13 PARTIULARS DATE CIVIL MECH. ELEC. CM H.O.D.										
REVISIONS										
APPROVED										
FOR BID PURPOSE ONLY:										
CLIENT: TAMILNADU GEN. & DIST. CORPORATION PROJECT: 2x600MW ENVIRO SEZ COAL BASED SUPERCRITICAL THERMAL POWER PROJECT AT ASH DYKE OF NCTPS, CHENNAI.										
TITLE :- INST. DRAWING FOR PRESS. & DIFF.PRESS. TRANSMITTERS/SWITCH (STEAM & LIQUID SERVICE)										
JOB. No. D-4027 DWG.No. 114-04-0104										
NAME: VIKAS SIGN: SKM/SN DATE: 23.04.13 SCALE: N.T.S.										
SHEET No. 7 of 19										

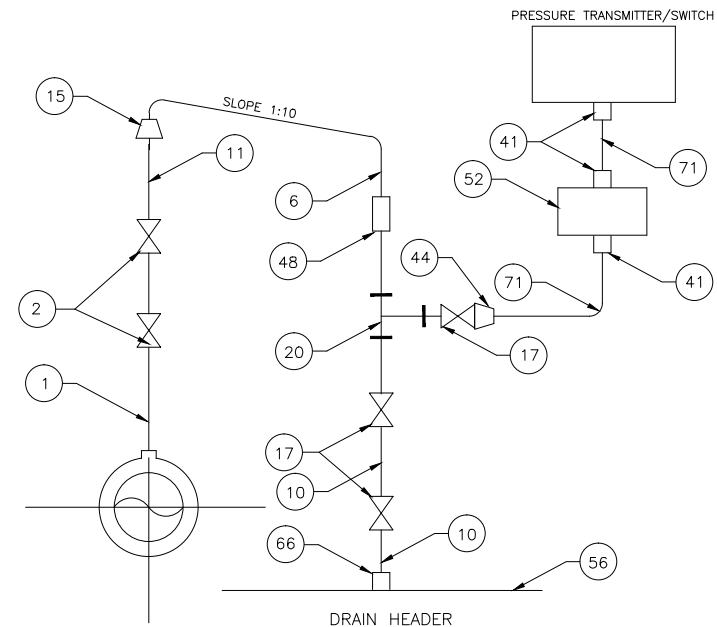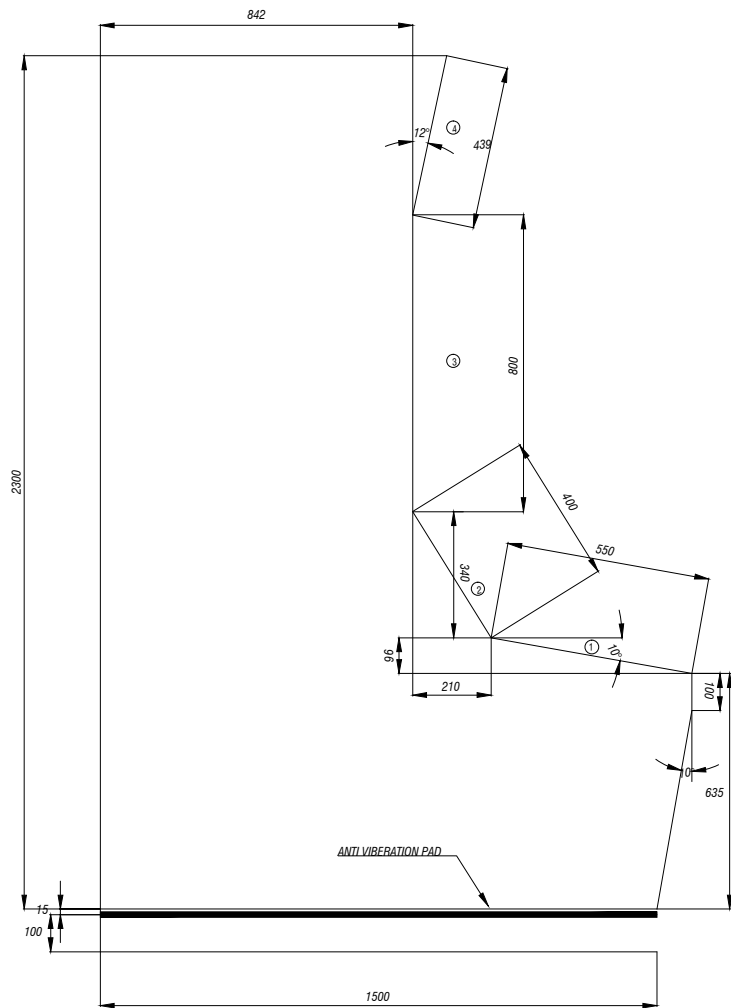

NOTE:-

- 1 : Panel for Mounting annunciation P.B., Desk release PB, Emergency Trip P.B.
- 2 : Panel for Mounting ILPB for OLCS / Sequential Operation.
- 3 : Sheet metal panel for mounting MIMIC, Ammeters, Indicator, Totalizer, recorder etc.
- 4 : Inclined Sheet metal panel for mounting Annunciation Facia windows.

NOTES		NOTICE		5								DESEIN		DRAWN		DESIGNED		CHECKED	
1. DO NOT SCALE, ASK WHEN IN DOUBT.		THIS DRAWING IS THE PROPERTY OF DESEIN CONSULTING ENGINEERS, NEW DELHI, AND IS LENT SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR OTHERWISE DISPOSED OF DIRECTLY OR INDIRECTLY. IT SHALL NOT BE USED TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS OR APPARATUS OR PARTS THEREOF EXCEPT FOR THE PROJECT SPECIFICALLY PROVIDED FOR BY CONTRACT AGREEMENT WITH DESEIN.		4								CONSULTING ENGINEERS		VIKAS		SKM/SN		SKM	
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.				3								NEW DELHI - INDIA		23.04.13		23.04.13		24.04.13	
3. DETAILS OF PANELS/ DESK SHALL BE AS PER SPECIFICATION.				2										CLIENT- TAMILNADU GEN. & DIST. CORPORATION		SCALE		NTS	
				1										PROJECT: 2x660MW ENMORE SEZ COAL BASED SUPERCRITICAL THERMAL POWER PROJECT AT ASH DYKE OF NCIPDS, CHENNAI.		JOB NO. D-4027			
				0										TITLE :- GEN.ARRG.OF DESK CUM PANEL (TYP) FOR BOP PACKAGES		DRG NO.		114-05-0105	
		A		PRELIMINARY		25.04.13		SLN										REV. 0	
		ZONE		MARK		PARTICULARS		DATE		C&I		MECH.		ELEC.					
						REVISIONS		APPROVED				FOR BID PURPOSE		SHEET NO. 1 of 1					

NOTES		NOTICE		5								DRAWN		DESIGNED		CHECKED	
1. DO NOT SCALE, ASK WHEN IN DOUBT. 2. ALL DIMENSIONS ARE IN MILLIMETRES (UNLESS NOTED OTHERWISE). 3. DESK/CONSOLID FOR PA SYSTEM SHALL ALSO BE PROVIDED BY BIDDER.		THIS DRAWING IS THE PROPERTY OF DESEIN CONSULTING ENGINEERS, NEW DELHI, AND IS LENT SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR OTHERWISE DISPOSED OF DIRECTLY OR INDIRECTLY. IT SHALL NOT BE USED TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS OR APPARATUS OR PARTS THEREOF EXCEPT FOR THE PROJECT SPECIFICALLY PROVIDED FOR BY CONTRACT AGREEMENT WITH DESEIN.		4								VIKAS		SKM/SN		SKM	
				3								23.04.13		23.04.13		24.04.13	
				2													
				1													
				0													
				A		PRELIMINARY		25.04.13		SUN						SCALE	
ZONE		MARK		PARTICULARS		DATE		CAD		MECH. ELEC.		TITLE:-		OGA-PRINTER TABLE FOR DDCMIS AND PLC SYSTEM		DRG. NO.	
				REVISIONS				APPROVED		FOR BID PURPOSE		SHEET NO.		4 of 4		114-05-0108	
																REV.	
																0	

M.ERECTION HARDWARE

CHAPTER-9

ERECTION HARDWARE

9.00.00 PROCESS CONNECTION AND PIPING

9.00.01 General Requirements

This section covers the material requirement for instrument connection to process, instrument process, piping, tubing, supports, Instrumentation cables, control cables and power cables for connecting UPS, 24/48 V DC, unregulated power supply for cubicle illumination, compensating cables/Extension cables, transmitter racks and main accessories to be furnished under this specification and the requirements of installation and routing. Impulse lines, fittings and other accessories required for the erection of complete Instrumentation and Control System supplied under various packages of this specification shall be supplied on "as required" basis. Bidder shall offer all necessary items for this section based on his experience on similar plants, plant layout diagrams, installation drawings and other applicable sections of this specification. Based on the good engineering practices Bidder shall furnish installation drawings during the engineering of the system for Owner's review and approval. The installation of the drawings shall be suitable for his installation of his range of instrumentation.

The Bidder shall furnish and test all required erection hardware, which is necessary for proper installation and interconnection of the equipment/systems furnished by the Bidder and their integration with main equipment/systems as per the enclosed installation drawings and other applicable clause. The Bidder shall furnish all hardware and accessories to ensure that the equipment/systems furnished form a complete and operational system meeting the intent and requirement of this specification.

All materials, furnished shall conform to the latest editions of American National Standard Code for Pressure piping, Power piping, ANSI B31.1, ANSI B16.11, ASME Boiler and Pressure Vessel Codes, IBR and other applicable ASME, ANSI and Indian Standards. Schedule numbers, sizes and dimensions of all carbon steel, stainless steel and alloy seamless steel pipe shall conform to ANSI B.36.10 and of stainless steel pipe shall conform to ANSI B 36.19 unless otherwise specified.

All materials supplied under this section shall be suitable for intended service; process operating conditions and type of instruments used and shall fully conform to the requirements of this specification.

The Bidder is responsible for the performance of the equipment furnished on system basis any shortfall in erection material observed during erection stage shall be compensated by the Bidder at no extra cost. (Installation drawings # 114-04-0000, 0100 to 0113 shall also be referred by bidder).

9.01.00 GUIDELINE FOR INSTALLATION AND ROUTING OF INSTRUMENT PIPING

9.01.01 General Requirements

The following general erection guidelines have been enumerated here to enable the Bidder to estimate the requirement of instrument piping in plant:-

- i) All instrument piping shall be in accordance with good engineering practice. It shall be finalized during engineering stage. Instrument piping shall be complete with fittings, valves and other required accessories.
- ii) Instrument piping shall not be routed:-
 - a) Across equipment removal areas
 - b) Below mono-rails and cranes
 - c) Above or below removable gratings
 - d) Above or below cable trays.
- iii) Primary Impulse Piping System:
 - a) The primary impulse piping system shall include the instrument piping and all required accessories from process tap off point (root valves onwards) up to the respective instruments. From the same source, Tee off for instruments are not allowed. Separate tapping shall be provided for each instrument. The Bidder shall provide the necessary fittings and accessories along with impulse pipes for completeness and arrangements as per the finalized Instrument Installation Diagrams. Special accessories such as reservoirs and other devices shall be installed as required for flow primary element connection as required by the design of instruments, in accordance with the instructions of the instrument manufacturer.
 - b) The Bidder shall prepare impulse pipe routing drawings.
 - c) Impulse piping shall include a blow-down line and shut-off valve adequate for the duty requirements and for withstanding continuous design pressure and temperature of process medium. For process pressure above 4.0 Kg/Cm²g, double valves shall be used before connecting to the blow-down header (This arrangement shall be provided for installation for the new transmitter if the existing transmitter has the same arrangement.)
 - d) To assure a constant static head the connections from low pressure steam and low pressure liquid filled lines should preferably slope downward continuously towards the instrument as the instrument is mounted below the source point. If downward slope is not feasible or the instrument is mounted above the source point, the line should slope upward continuously and a "pigtail" installed at the instrument to assure a water seal for temperature protection. Upward sloping liquid lines should be used only if the process pressure is sufficient to assure a head of liquid at the instrument. Horizontal runs should have a slope of not less than 40 mm per meter and must be adequately supported to maintain a constant slope. Vacuum connections to the condenser should always slope upward to the instrument.
 - e) Primary process piping for steam flow, liquid flow and manometric level measurement systems should preferably slope downward from the primary element connections to the instrument. Primary piping for flue gas and air flow measurement systems should preferably slope upward from

the primary element connections to the instrument. If these requirements cannot be met, special venting or drain provisions will be required. Horizontal runs must have a slope of not less than 40 millimeters per meter and must be adequately supported to maintain a constant slope.

- f) Primary process piping from the field which enters the instrument enclosure from the bottom shall extend into the enclosure approximately 150 millimeters and be equipped with a socket weld to flareless tubing coupling of stainless steel. This coupling shall be used to connect the field primary process line to the enclosure process line. The field primary process line shall be anchored to the enclosure angle with U-bolts. Holes for supporting U-bolts shall be field or drilled.
- g) All impulse piping shall be supported rigidly at an interval not exceeding 1.5 meters so as to prevent excessive sag in piping. Process piping shall not be used for supporting impulse piping.
- h) Impulse lines subject to severe sonic pulsations such as boiler feed pump discharge, shall be of sufficient length and of suitable configuration to scatter harmful sonic wave energy before it reaches the instrument.
- i) Impulse piping shall be installed to permit thermal expansion without placing excessive stress on the piping and without affecting the gradient of slope. Long continuous straight runs of piping shall always be avoided. If required, expansion loops shall be provided at least every 2.5 meters to break the continuity.
- j) All welded and screwed fittings shall conform to ANSI B16.11. Threads of piping components shall be taper pipe thread in accordance with ANSI B2.1. All threads shall be clean machine cut with all burrs and chips removed. Lubricants shall be of dry film type. Any one of the following compounds may be used as a pipe thread sealer. Bidder shall supply adequate amount of his preferred sealer for erection purpose.
 - a) Permatex
 - b) Molycote
 - c) Neolube(Teflon tape shall not be used as a pipe thread sealer).

9.01.02 Impulse Piping System

Impulse piping system consists of primary impulse pipes/tubes, valves, fittings, valve manifolds and other accessories between the source connection point (source shut-off valve on wards) and all instruments/devices. Impulse pipe span for supporting clamp shall be 1.5 mtr. This will also include all piping and valves etc. required for instrument drain and vent connections. The Bidder shall furnish and test all items required for completeness of this specification.

9.01.03 AIR SUPPLY PIPING

The piping for air supply shall be as specified below (However the Bidder shall supply the materials as required basis to complete the system in all respect)

i) Individual Supply Lines and Control Signal Lines:-

Air lines shall be ¼ inch size, connected by brass/SS316 flare less tubing fittings. Copper/SS316 tubing shall be light drawn tempered tubing conforming to ASTM B75 except copper tubing in tubing cables shall be annealed soft temper tubing conforming to ASTM B68 or B75. Fittings on the branch line to facilitate connections to the individual supply line shall be cast brass screwed type.

ii) Flexible Hoses:-

Flexible hoses shall be ¼ inch SS flexible hose pipe and with Buna-N liner steel wire braid reinforcement complete with ¼ inch brass/SS316 fittings and shall have swivel male pipe threads. Each hose shall be done meter in length.

iii) Pipe Material Specification:-

The piping material shall be carbon steel hot-dipped galvanized inside and outside as per IS-1239 or the equivalent of these standard heavy quality with screwed ends. The piping threads shall be as per ASA B.2.1.

iv) Isolating Valves:-

Gate valves as per ASTM B62 inside screw rising stem screwed female ends as per ASA B.2.1 valve bonnet shall be union type and trim shall be stainless steel body rating 150 pounds ASA. Valves sizes shall be ½ inch to 2 inch.

v) Fittings:-

Forged cast steel A234 Gr. WPM galvanized inside and outside; screwed as per ASA B2.1 dimensions as per ASA B16.11, rating 2000 pounds, elbows and soft seats. The size of the fittings shall be ½ inch through 2 inch.

vi) Air Filter Regulator Set:-

An instrument Air Filter Regulator Set with mounting assemblies shall be provided for each pneumatic device requiring air supply.

vii) Instrument Air Piping System:-

a) Instrument Air shall be made available by the bidder at 3.5 to 7.0 Kg/cm² pressure. The instrument air may be arranged as under:-

11. For the control valves and power cylinders in owner's scope but controlled by bidder's control system, the instrument air requirement for E/P converter shall be tapped from the nearby instrument air header laid by bidder / already laid existing piping with accessories available near the control valves or damper.

Complete hardware required for interfacing with Owner system shall be in bidder scope.

- b) Air supply piping shall be installed at site always with a slope of over 1/100 to prevent accumulation of condensed water within the pipe.
- c) All joints in the instrument air sub-header shall be of screwed type.
- d) Instrument air line shall be separate for each individual instrument, equipment & drive with own isolation valve and other required hardware. Tee off of instrument line for two or more same/similar services instrument, equipment & drive are not acceptable.
- e) Instrument air flushing/purging lines shall be provided for Bowl Mill DP, secondary air flow measurement instrument and other all flue gas services instruments etc.

viii) Signal / Control Air Tubing System:-

Necessary tubes with fittings and accessories for output signal from pneumatic instruments mounted in the field and control signals to final control elements shall be covered under this tubing system.

9.02.00 SPECIFICATION FOR ERECTION HARDWARE

The erection hardware shall meet the following specifications:-

	<u>Item</u>	<u>Specification</u>
9.02.01	Impulse Piping	
i)	High pressure and high temperature services (Medium: Steam & Water and furnace region)	Seamless Alloy Steel piping to ASTM A335 GR.P91/22 (schedule XXS/160 for high pressure & high temperature)
ii)	Low pressure and low temperature services (Medium: Steam & Water)	Seamless carbon steel piping to STM A106, Gr.C
iii)	Low pressure and low temperature services (Air, Flue gas)	ERW carbon steel piping to IS 1239:1973 Heavy class System)
iv)	Steam and water analysis system	Seamless stainless steel piping to ASTM A312 GR. TP-321
v)	Seamless copper tubing	ASTM B-75

9.02.02 Fittings Double compression type

- | | | |
|------|--|---|
| i) | Material for socket weld fittings | ASTM A105
ASTM A182,
Gr. F22
6000/3000 lbs |
| ii) | Dimensions of fittings | ANSI B16.11 |
| iii) | Fittings for steam and water analysis. | Gr. F-321 |

9.02.03 Valves

- | | | |
|------|----------------------------|---|
| i) | 3 – way valves | SS body/forged CS
body stellited internals and SW ends
as per requirement for 2500 lb/800 lb
ASA ratings. |
| ii) | 5- valve manifolds | FAS body/FCS body
316SS stellited internals with NPT(F)
SCRD ends for 3000/2500 lb/1500
lb/800 lb ASA ratings. Construction –
Single block (Bar stock) |
| iii) | 3-valve manifolds | FAS body/FCS body
316SS stellited internals with NPT(F)
SCRD ends for 3000/ 2500 lb/1500
lb/800 lb ASA ratings. Construction –
Single block (Bar stock) |
| iv) | 2-valve manifolds | FCS body, 316SS
stellited in ternals, NP T(F) S CRD
ends. C onstruction – Single bl ock
(Bar stock) |
| v) | Isolation and drain valves | Globe valves with
FAS body/FCS body, 316SS stellited
internals SW ends for 3000/2500
lb/1500 lb/800 ASA ratings. |

9.02.04	Condensation vessels	FAS/FCS body with NPT (F) SCR D connection and vent plugs for 3000/2500/1500/800 lb ASA ratings.
----------------	----------------------	--

9.02.05	Racks and Associated Equipment	ANSI C83.9-1972
----------------	-----------------------------------	-----------------

9.02.06	Code for pressure piping, welding and Hydrostatic testing	ANSI B-31.1
----------------	---	-------------

- 9.02.07** Flexible conduits with fittings Lead coated, paper insulated, heat resistant flexible metallic conduits with necessary fittings.
- 9.02.08 3 Valve manifold shall be used, wherever Diff Pressure transmitter/switch have been used for pressure measurement.
- 9.02.09 5 Valve manifold shall be used for Diff. Pressure & Flow measurement Transmitters/Switches.
- 9.02.10 In addition to above, table # 9.1 shall also be followed for selection of specific erection hardware as per process requirements.

9.03.00 TRANSMITTER & SWITCHES ENCLOSURES

In general, B T G process transmitters & switches installed at outdoor location and in areas where they are subjected to splashing oil, water, steam etc., shall be mounted in closed type transmitter rack. For other areas (indoor), open type racks may be used for installation of transmitters and process switches. However the actual requirement shall be finalized during detailed Engineering considering following:-

- i) Transmitter/Switches enclosures shall be free standing, enclosed type of ferrous protection against dust, moisture and vermin. Enclosures shall be suitable for outdoor installations, in thermal power plants.
- ii) The enclosures shall comprise of Galvanized Sheet mounting plate internally. Also external-mounting brackets in Polyamide or Stainless Steel shall be available. Alternatively transmitter enclosures can be glass Fiber Reinforced Polyester (GRP) compression moulded and shall be weather proof.
- iii) Instrument piping inside the enclosure shall conform to the specification and in line with typical installation drawings enclosed with the specification.
- iv) Blow down header shall be provided inside the enclosure as called for.
- v) Bulk head connection shall be provided to receive and terminate the impulse pipes from root valves.
- vi) Instrument tubing, fittings and isolation, drain valves shall be to ANSI code for pressure piping. Piping/tubing shall be subject to hydrostatic tests at 1.5 times maximum system pressure.
- vii) Support angles shall be provided for valve manifolds, wiring trays etc. Enclosures shall be complete with necessary bulk head fittings, junction boxes, drain header and other accessories as needed on the basis of approved hook up drawings.
- viii) Sufficient spacing among adjacent transmitters shall be maintained to offer easy accessibility and operational convenience. The enclosure shall be designed with sizes to suit the grouping and to completely include all the hardware for hooking up

the transmitters to the process on the basis of approved installation diagrams. A maximum of five (5) transmitters are envisaged to be grouped in one enclosure.

- x) A minimum of twenty (20) per cent spare terminals shall be provided. Only one wire per terminal shall be used on the outgoing side of these blocks (for cable panel). Any common connections required shall be provided on the panel side of the block. All incoming power terminals are to be clearly identified in a manner distinctly different from all other terminals and grouped in a logical pattern.
- xi) Chapter no. 6 of this volume shall also be referred for designing of Transmitter/Switches enclosures.

9.04.00

LOCAL INSTRUMENTS, LOCAL BOARDS AND TAPPING POINTS

- i) All local gauges as well as sensors, Transmitters and switches any other instruments for parameters like pressure, temperature, level, flow etc for safe and efficient operation of equipment under the scope of specification, shall be provided by bidder as approved by Owner. Such equipment shall be listed by the Bidder detailing the items with their respective functions in service. All field mounted instruments shall be mounted in such a way as not to be affected by vibration & environmental conditions. Racks to mount these instruments shall be furnished by bidder complete with requisite erection hardware, tubings and junction boxes with all terminals of the instruments duly wired complete with cable glands. Groupings of instruments, actual number of racks for instruments and its construction shall be to Owners approval.
- ii) Transmitters & Switches provided shall be mounted in transmitter/Switches enclosures to owner's approval. The junction box for electrical connections shall be outside the transmitter enclosures.
- iii) All erection hardware required for complete installation/ implementation of entire instrumentation specified is included in bidders scope. Any change in size, type, rating or in quantity deemed necessary during engineering shall be supplied within package price with no additional financial implication to owner.
- iv) Bidders scope includes providing counter flanges on pipe lines/ vessels to suit owner arranged flanged devices. Counter flanges shall be complete with gaskets, nuts, bolts and other requisite accessories for proper installation.
- v) Separate and independent tapping on equipment/associated piping shall be provided to suit the philosophy of redundant primary sensors. Separate sensors for control and monitoring etc are as decided by Owner. This shall include application such as first stage pressure. Wherever the process value being measured needs to be compensated for temp, pressure variations, the tapping points for such compensating elements shall be provided in requisite number along with the tapping for the process value.
- vi) Whereever transmitters & switches are provided, in addition Local gauges shall also be provided by bidder for local field monitoring.

- vii) Local instruments and remote sensors & transmitters to be furnished with the equipment shall generally be as indicated herein and as per redundancy criteria indicated elsewhere but not be limited to the following: -

1. Pressure Measurement

i. **Pressure Gauge** for:

- a) Shell pressures of all Deaerator, HP and LP heaters and other vessels.
- b) Mercury manometers shall be provided during air outlet flows measurement.
- c) Bleed steam pressure at extraction point for all turbine extractions and for pressure on drain lines.
- d) Pressure gauges at inlets and outlets of condensate extraction pumps, main oil pump, each auxiliary oil pump, AC standby oil pump, DC Emergency oil pump, jacking oil pumps, DM makeup pumps, DMCW pumps, BFP, or any other pumps etc.
Pressure Gauge at outlet of each type of Fan.
- e) Lube oil pressure before and after oil coolers, HPT & IPT front seal chamber leak off pressure.
- f) MS pressure downstream of ESV, after HPT control valves and after HPT first stage, HRH steam pressure after IV, Gland steam header pressure, HPT exhaust etc.
- g) Condensate pressure in condensate pump discharge header, and feed water pressure at inlet and outlet of each LP & HP heaters.
- h) LP turbine exhaust pressure and condenser pressure
- i) Relay/Lube/Control oil pressure, Drain oil lines pressure.
- j) Pressure gauges for vacuum pumps and each pump discharge.
- k) Pressure gauge at Instrument and service air header in compressor room and in the field at the main location of instrument/service air header, the pressure gauges shall be provided.
- l) Pressure gauges at inlet and outlet of each heat exchanger and cooler.
- m) Frame mounted Pressure Gauges (FMG) shall be provided for Main steam Pressure, Feed water pressure to economizer, CRH Steam Pressure, HRH Steam Pressure etc.
- n) For condensate storage tank the pressure gauge in terms of 0-10000 mm wc or suitable range having **dial size of 300 mm or bigger size** shall be provided.
- o) **U tube manometer with Hg filled for direct measurement of condenser vacuum** shall be provided in the fixed with isolation valve for local indications.
- p) Above are the minimum requirements, actual quantities shall be as decided during detailed engineering by owner.
- q) Pressure gauge for all IBOP packages as decided during detailed engineering by owner.

ii. **Pressure Switches**

- a) Pressure switches at condensate Extraction Pump Discharge header, Boiler feed pump, seal water line or any other pumps for alarm (high & low) and interlock purpose.

- b) Pressure switches for steam supply to LP/HP heaters.
- c) Pressure switches for initiation of turning gear.
- d) Pressure switches for control oil, jacking oil and lube oil pressure for all required alarms and interlocks.
- e) Steam pressure downstream of ESV, steam pressure after first stage of HPT, gland steam header pressure and suction line from turbine glands to Gland cooler.
- f) Pressure switches for condenser vacuum low, very low alarms & interlocks.
- g) Condenser water box pressure for alarm interlocks.
- h) Pressure switches (low & high) for individual pumps/blowers suction/discharge and discharge header – alarms, interlocks and protection
- i) At the main location of instrument air header the pressure low switches shall be provided for alarms in DDCMIS
- j) Pressure switches/any other process switch etc. for OLCS / Alarms / Interlocks / Protection. Pressure switches at inlet, outlet of individual pumps and discharge header of pumps for protection and auto start / stop & alarms.
- k) Above are the minimum requirements, actual quantities shall be as decided during detailed engineering as per redundancy criteria by owner.
- l) Pressure switches for all BoP packages as decided during detailed engineering. by owner.

iii. Differential Pressure Transmitters, Diff Pressure Switches & Diff. Pressure Gauges

- a) Pressure across strainers and filters.
- b) Diff. Pressure Transmitters/switches/Gauges for all BoP packages as decided during detailed engineering by owner.
- c) Diff. Pressure Transmitter across condenser on CW lines, Air pre heaters on air & flue gas lines, on PA lines, CEP suction strainers, Feed control station etc.
- d) Above are the minimum requirements, actual quantities shall be as decided during detailed engineering as per redundancy criteria by owner.

iv. Pressure Transmitters

- a) For all services as mentioned for Pressure gauges & Pressure Switches.
- b) Pressure Transmitters at condensate Extraction Pump individual Discharge and discharge header, Boiler feed pump individual Discharge and discharge header, seal water line or any other pumps/fans/HT/LT unidirectional drive for alarm (high & low) and interlock purpose.
- c) Pressure transmitter for wind box (Left/Right) & pulverizer seal air fans discharge pressure.
- d) Pressure Transmitters as on required basis for monitoring, interlocks & controls as per redundancy criteria and approved by owner.
- e) Above are the minimum requirements, actual quantities shall be as decided during detailed engineering as per redundancy criteria and approved by owner.
- f) Pressure Transmitters for all BoP packages as decided during detailed engineering by owner.

2. Temperature Measurements:-

The Bidder shall furnish all temperature sensing elements to be installed in their piping. The scope of supply shall include, but not limited to the following: -

- i) Duplex RTDs for all bearing, drain oil from bearings, LPT exhaust steam, 3 no's of duplex RTDs each on left and right CW outlet of condenser etc.
- ii) 6 no. duplex or 12 no. simplex Embedded temperature detectors for various motor stator windings and duplex RTDs for Motor/Pump bearing temp.
- iii) Chromel-alumel surface/other thermocouples for turbine casings, ESV, IV bodies, superheated steam, hot reheat steam piping, steam of first stage HPT, inlet bowl of IPT, steam exhaust of HPT, down stream of ESV and IV, steam in ESVs and IVs, steam admission pipes metal temperatures, HPC, IPC flange metal temperature etc.
- iv) For all HP heaters remote monitoring with redundant independent sensors of inlet/outlet temperatures of feed water and extraction steam shall be provided in addition to local gauges.
- v) For all LP heaters remote monitoring with redundant independent sensors of inlet/outlet temperatures of feed water and extraction steam shall be provided in addition to local gauges.
- iv) Temperature sensors for HP-LP bypass system for measurement as well as for control.
- v) Adequate number of temperature Elements shall be furnished to provide initiating contacts for temperature interlocking and trip circuits. The temperature elements shall be provided, but not limited to the following: -

Steam temperature of HPT exhaust, steam temperature after ESV (L&R), IV (L&R), LPT exhaust hood steam, drain oil temperature of all journal bearings and thrust bearing & lube oil heater temperatures, thrust bearing of each condensate extraction pump and vacuum pump protection, interlocks.

- vi) Metal Temp measurement and steam temp measurement at each super heater & Reheater location.
- vii) Temp. Element & Temp gauges at Feed water line to economizer inlet, economizer to steam separator, spray water lines to desuperheaters, Soot blower steam, Soot blower steam drain lines, steam drain lines, Flue gas & air lines etc
- viii) Temp. Measurements (Local & remote) for all BOP packages as decided during detailed engineering.
- ix) Thermocouples for Temp. above 200 deg C shall be provided by bidder.
- x) For plate heat exchangers, spare thermowell provision shall be made at inlet & outlet of ACW & DMCW lines in addition to local & remote temperature monitoring points.
- xi) Each ESP Hopper shall be provided with RTDs to control the temperature of ash through Hopper heater.

xii) Temperature gauges.

- a) For bearing temperatures AC and DC lube oil pumps, LPT exhaust hood etc.
- b) For condensate and feed water at inlet and outlet of HP heaters, Vacuum pumps, LP heaters etc.

- c) Steam & water inlet/outlet of LP and HP heaters, steam and air mixture inlet to vacuum pumps, and drain lines etc.
- d) Journal/thrust bearing drain oil, lube oil at inlet/outlet of oil coolers, cooling water at inlet and outlet of oil coolers etc.
- e) Thrust bearing of each condensate extraction pump.
- f) Temp. Gauges at inlet and outlet of each heat exchanger and cooler.
- g) Frame mounted Temperature Gauges (FMG) shall be provided for Main steam Temperature, Feed water Temperature to economizer, CRH Steam Temperature, HRH Steam Temperature etc
- xiii) Above are the minimum requirements, actual quantities shall be as decided during detailed engineering by owner.

3. Level Measurement

- i) Level gauges - level gauges for boiler separator, HP heaters, LP heaters, deaerator, drain cooler, gland steam cooler, vacuum tanks, condenser hot well CBD tank, sator water tank, Sator water expansion tank and other pressure vessels, main oil tank and all oil tanks in BTG & BOP package. The level gauges shall be mica shielded steel armoured transparent glass type. Level gauges for condenser hot well shall be provided on both sides.
- ii) Level switches for HP/LP heaters, drain cooler, gland steam cooler, condenser hot well, deaerator, main oil tank and other pressure vessels, tanks, sumps etc. The separate switches for high, very high and low levels shall be provided as per interlocks and protection requirements.

External cage mounted magnetic level switches/ displacer type shall be employed for low pressure & low temp. services.

However conductivity type level switches shall be provided for high pressure & high temp services like HP heaters, CRH/HRH drain Pot, Turbine Drains etc.

- iii) Level Transmitters (Type as per Owner approval) for open sump/tank/bunker/vessel/heaters.
- iv) Level measurement for all BoP packages as decided during detailed engineering.
- v) Level switches for OLCS / Alarms / Interlocks / Protection. Level switches for sump/tank level high/normal/ low/very low interlocks.
- vi) Each ESP hopper must be provided with 3 nos. level switch (switches 2 nos. for high level and One no. for low level.)
- vii) Above are the minimum requirements, actual quantities shall be as decided during detailed engineering by owner.

4. Flow Measurements:-

- a) Primary Elements: Flow nozzles shall be used for feed water flow and other critical measurements where weld-in construction is required. Flow nozzles shall be made of stainless steel, with three sets of pressure taps installed in the pipe wall where required. One no. spare set of pressure tap shall also be provided on flow nozzle,

wherever required. Installation of flow nozzles and pressure taps shall be made in the pipe fabricator's shop and shall be witnessed by a representative from the flow nozzle manufacturer.

- b) Paddle type orifice plates shall be used for other flow measurements where flanged construction and higher pressure loss are acceptable. Orifice plates shall be made of stainless steel. Orifice flanges shall be of the raised face weld neck type with dual sets of taps.
- c) Construction and installation of flow nozzles and orifices shall conform to the requirements of ASME Performance Test Code PTC-19.5, and discharge coefficients shall be predicted in accordance with data published in ASME Research Report on Fluid Meters.
- d) Airfoil or venturi flow sections, shall be used for measuring boiler combustion airflow.
- e) A special high accuracy flow nozzle pipe shall be provided to determine feed water flow to the economizer. This nozzle shall be hydraulically calibrated and utilized for feed water flow control and for turbine testing as described in ASME PTC 6 (latest revision).
- f) Orifice plates shall be supplied with carrier rings as per process requirement.
- g) Doppler effect type flow meters shall be used for sludge applications.
- h) For Raw water, water treatment plant and effluent treatment plant, ultrasonic type flow meters to be used.
- i) Secondary Elements: Secondary elements for differential type flow sensors shall be strain gauge or capacitance type differential pressure transmitters. Square root extraction required for the DP transmitters shall be performed electronically in the transmitter itself.
- j) HFO/LDO flow meters shall be based on coriolis mass flow technology. Fuel Oil meters shall be provided for fuel oil unloading system and near boiler after day oil tank (at main supply & return line).
- k) Flow nozzles shall be provided for following services in main plant:-
 - i) Steam flow measurement for BFP Turbines.
 - ii) Feed water flow measurement
 - iii) Auxiliary steam flow measurements
 - iv) HP bypass flow measurements
 - v) BFP suction flow.
 - vi) Deaerator water flow measurement
 - vii) HP heaters drain Flow measurements.

Orifices shall be provided for following services:-

- i) Spray water flow measurement

- ii) Condensate flow measurements
 - iii) DM/hotwell makeup to condenser.
 - iv.) Condensate dump flow to CST
 - v) Gland Steam Condensate flow measurements
- l) For DM water flow & Ash Slurry flows measurements online electromagnetic flow meter shall be used.
 - m) At CW & ACW pump discharge headers flow transmitters shall be provided (Non Contact ultrasonic Type are preferable). In addition flow measurement shall also be provided for CW water used anywhere except condenser service.
 - n) Instrument and Service Air - Vortex/Swirl type Flow meter
 - o) Flow transmitters for general applications shall be of the differential pressure type
 - p) Flow switches for OLCS / Alarms / Interlocks / Protection.
 - q) Lubricating oil Flow transmitter/meter with switch shall be provided for Bearing systems of APH, FD, PA, etc.,
 - r) Sight glasses flapper indication type shall be provided on lube oil cooling water piping as required to ensure indication of fluid flow.
 - s) On Line Fuel flow & velocity measurement facility in each Pulverized Fuel (PF) pipe for each coal pulveriser shall be provided by bidder for accurate, absolute and simultaneous measurement of coal velocity, coal density, coal mass flow rate and air-to-fuel ratio. The equipments shall comprise of sensors working on micro wave technology.
 - t) In addition to the **conventional triple DP measurement techniques** involving venturi/Airfoil for secondary air flow measurement, One number **Flow measurement** system each on Left side and Right side shall be provided **as redundant/checking measurement for secondary air flow** which could be used in the optimization package.

On line secondary air flow & velocity measurement facility in each on Left side & right side shall be provided by bidder for accurate, absolute and simultaneous measurement of air velocity & flow rate. The equipments shall comprise of sensors working on tribo-electric (Correlation technique) technology.
 - u) Any other flow element/meter required for system shall be finalised as per system requirement and as per approved drawings/documents by owner.

9.05.00

Process Connections

The type of instrument source connection shall depend upon the process parameters and the tapping size. The source connection drawings shall be finalised during the engineering stage.

Size of tapping point stub, number and size of root valves for different types of measurements are as follows:

Sl. No.	Quantity of root valves	Size of stub and root valve	Service Condition
Pressure and Differential Pressure Measurement			
(i)	2	25NB	≥ 40 bar(g) OR 425°C
(ii)	1	15NB	< 40 bar(g) AND 425°C .
Level Measurement			
(a)	Level Gauge & Switch		
(i)	2	25NB	≥ 40 bar(g) OR 425°C
(ii)	1	25NB	< 40 bar(g) AND 425°C
(b)	Level transmitter (displacement type)		
(i)	2	40NB	≥ 40 bar(g) OR 425°C
(ii)	1	40NB	< 40 bar(g) AND 425°C
(c)	Stand pipe for level measuring instrument		
(i)	2	80 NB	≥ 40 bar(g) OR 425°C
(ii)	1	80 NB	< 40 bar(g) AND 425°C
<i>Flow Measurement</i>			
(i)	2	25NB	≥ 40 bar(g) OR 425°C
(ii)	1	25NB	< 40 bar(g) AND 425°C
Sampling system measurement (Steam and Water Service)			
(i)	2	25 NB	≥ 40 bar(g) OR 425°C
(ii)	1	25 NB	< 40 bar(g) AND 425°C

**TITLE**

2X 660 MW ENNORE SEZ STPP
TECHNICAL SPECIFICATION FOR
CONDENSATE POLISHING UNIT

SPECIFICATION NO: PE-TS-412-155A-A001

VOLUME: II B

REV 00

SHEET

VOLUME III

**TITLE****2X 660 MW ENNORE SEZ STPP
TECHNICAL SPECIFICATION FOR
CONDENSATE POLISHING UNIT**

SPECIFICATION NO: PE-TS-412-155A-A001

VOLUME: II B

REV 00

SHEET

LIST OF DOCUMENTS TO BE SUBMITTED ALONG WITH BID

- Technical pre-bid clarification if any strictly in the enclosed Schedule of pre bid clarification s only with mention of specification clause for which clarification is being asked. (Stamped & Signed).
- Technical Deviation if any strictly in the enclosed Schedule of deviation with cost of withdrawal only with mention of specification clause for which deviation is being asked. (Stamped & Signed).
- Compliance cum confirmation certificate (Stamped & Signed).
- Un Price Schedule duly filled in (Stamped & Signed).
- Electrical Load List in BHEL format (Stamped & Signed).
- List of Start-up & commissioning spares if any (Stamped & signed).
- List of tools & tackles (Stamped & signed).
- List of recommended spares for 3 years of normal operation of the Condensate polishing plant.
- Following guaranteed chemical consumption required per regeneration per vessel (in kg) to be furnished.
 - i) Acid (30% HCL) consumption per vessel per regeneration
 - ii) Alkali (48 % NaOH) consumption per vessel per regeneration.

NOTE: Any other documents submitted by bidder except as asked above shall not be evaluated & considered as null & void.

**TITLE****2X 660 MW ENNORE SEZ STPP
TECHNICAL SPECIFICATION FOR
CONDENSATE POLISHING UNIT**

SPECIFICATION NO: PE-TS-412-155A-A001

VOLUME: II B

REV 00

SHEET

COMPLIANCE CUM CONFIRMATION CERTIFICATE

The bidder shall confirm compliance with following by signing / stamping this compliance certificate (every sheet) and furnish same with the offer.

1. The scope of supply, technical details, construction features, design parameters etc. shall be as per technical specification & there are no exclusions, other than those mentioned under "exclusion and those resolved as per 'Schedule of Deviations', with regard to same.
2. There are no other deviations w.r.t. specifications other than those furnished in the 'Schedule of Deviations'. Any other deviation, stated or implied, taken elsewhere in the offer stands withdrawn unless specifically brought out in the 'Schedule of Deviations'.
3. Bidder shall submit QP in the event of order based on the guidelines given in the specification & QP enclosed therein. QP will be subject to BHEL / CUSTOMER approval & customer hold points for inspection / testing shall be marked in the QP at the contract stage. Inspection / testing shall be witnessed as per same apart from review of various test certificates/ Inspection records etc. The charges for 3rd party inspection (Lloyds, TUV or equivalent) for imported components shall be included in the base price of the equipment by the bidder. This is within the contracted price without any extra implications to BHEL after award of the contract.
4. All drawings/data – sheets etc. to be submitted during contract shall be subject to BHEL/Customer review/ approval. GA drawings, as submitted with offer at tender stage are for reference purpose only and shall be subject to approval during contract stage.
5. The offered materials shall be either equivalent or superior to those specified in the specification & shall meet the specified / intended duty requirements. In case the material specified in the specifications is not compatible for intended duty requirements then same shall be resolved by the bidder with BHEL during the pre-bid discussions, otherwise BHEL / Customer's decision shall be binding on the bidder whenever the deficiency is pointed out. The offered materials shall be either equivalent or superior to those specified. Also for components where material is not specified it shall be suitable for intended duty, materials shall be subject to approval in the event of order.
6. The commissioning spares (if any) are supplied on 'As Required Basis' & prices for same included in the base price (If bidders reply to this is "No commissioning spares are required" and if some spares are actually required during commissioning same shall be supplied by bidder without any cost to BHEL).
7. All sub vendors shall be subject to BHEL/CUSTOMER approval in the event of order.
8. Guarantee for plant/equipment shall be as per relevant clause of GCC / SCC / Other Commercial Terms & Conditions
9. In the event of order, all the material required for completing the job at site shall be supplied by the bidder within the ordered price even if the same are additional to approved billing break up, approved drawing or approved Bill of quantities within the scope of work as tender specification. This clause will apply in case during site commissioning, additional requirements emerges due to customer and / or consultant's comments. No extra claims shall be put on this account.
10. Schedule of drawings submissions, comment incorporations & approval shall be as stipulated in the specifications. The successful bidder shall depute his design personnel to BHEL's / Customer's / Consultant's office for across the table resolution of issues and to get documents approved in the stipulated time.
11. As built drawings shall be submitted as and when required during the project execution.

**TITLE****2X 660 MW ENNORE SEZ STPP
TECHNICAL SPECIFICATION FOR
CONDENSATE POLISHING UNIT**

SPECIFICATION NO: PE-TS-412-155A-A001

VOLUME: II B

REV 00

SHEET

12. The bidder has not tempered with this compliance cum confirmation certificate and if at any stage any tempering in the signed copy of this document is noticed then same shall be treated as breach of contract and suitable actions shall be taken against the bidder.
13. Successful bidder shall furnish detailed erection manual for each of the equipment supplied under this contract at least 3 months before the scheduled erection of the concerned equipment / component or along with supply of concerned equipment / component whichever is earlier.
14. Document approval by customer under Approval category or information category shall not absolve the vendor of their contractual obligations of completing the work as per specification requirement. Any deviation from specified requirement shall be reported by the vendor in writing and require written approval. Unless any change in specified requirement has been brought out by the vendor during detail engineering in writing while submitting the document to customer for approval, approved document (with implicit deviation) will not be cited as a reason for not following the specification requirement.
15. In case vendor submits revised drawing after approval of the corresponding drawing, any delay in approval of revised drawing shall be to vendor's account and shall not be used as a reason for extension in contract completion.
16. Any special tools & tackles, if required, shall be in bidder's scope.
17. Performance guarantee test parameters shall stand valid till the satisfactory completion of Performance guarantee test and its acceptance by BHEL/Customer.

PARTICULARS OF BIDDER / AUTHORISED REPRESENTATIVE				
NAME	DESIGNATION	SIGNATURE	DATE	

**TITLE****2X 660 MW ENNORE SEZ STPP
TECHNICAL SPECIFICATION FOR
CONDENSATE POLISHING UNIT**

SPECIFICATION NO: PE-TS-412-155A-A001

VOLUME: II B

REV 00

SHEET

PRE BID CLARIFICATION SCHEDULE

All clarification from the Technical Specification shall be filled in by the BIDDER clause by clause in this format only.

VOLUME	SECTION	CLAUSE NO.	PAGE NO.	SPECIFICATION REQUIREMENT	CLARIFICATION	REASONS FOR CLARIFICATION

PARTICULARS OF BIDDER / AUTHORISED REPRESENTATIVE				
NAME	DESIGNATION	SIGNATURE	DATE	COMPANY SEAL

THIS IS A PART OF TENDER TECHNICAL SPECIFICATION PE-TS-412-155A-A001

SCHEDULE OF DEVIATIONS WITH COST OF WITHDRAWAL



PROJECT:- 2X 660 MW ENNORE SEZ STPP

CONDENSATE POLISHING UNIT

TENDER ENQUIRY REFERENCE:-

NAME OF VENDOR:-

SL NO	VOULME/ SECTION	PAGE NO.	CLAUSE NO.	TECHNICAL SPECIFICATION/ TENDER DOCUMENT	COMPLETE DESCRIPTION OF DEVIATION	COST OF withdrawal OF DEVIATION	REFERENCE OF PRICE SCHEDULE ON WHICH COST OF withdrawal OF DEVIATION IS APPLICABLE	NATURE OF COST OF withdrawal OF DEVIATION (POSITIVE/ NEGATIVE)	REASON FOR QUOTING DEVIATION
-------	-----------------	----------	------------	--	-----------------------------------	---------------------------------	--	--	------------------------------

TECHNICAL DEVIATIONS

COMMERCIAL DEVIATIONS

PARTICULARS OF BIDDERS/ AUTHORISED REPRESENTATIVE

NAME	DESIGNATIONS	SIGN & DATE

NOTES:

1. For self manufactured items of bidder, cost of withdrawal of deviation will be applicable on the basic price (i.e. excluding taxes, duties & freight) only.
2. For directly dispatchable items, cost of withdrawal of deviation will be applicable on the basic price including taxes, duties & freight.
3. All the bidders have to list out all their Technical & Commercial Deviations (if any) in detail in the above format.
4. Any deviation not mentioned above and shown separately or found hidden in offer, will not be taken cognizance of.
5. Bidder shall submit duly filled unpriced copy of above format indicating "quoted" in "cost of withdrawal of deviation" column of the schedule above along with their Techno-commercial offer, wherever applicable.
6. Bidder shall furnish price copy of above format along with price bid.
7. The final decision of acceptance/ rejection of the deviations quoted by the bidder shall be at discretion of the Purchaser.
8. Bidders to note that any deviation (technical/commercial) not listed in above and asked after Part-I opening shall not be considered.
9. For deviations w.r.t. Payment terms, Liquidated damages, Firm prices and submission of E1/ E2 forms before claiming 10% payment, if a bidder chooses not to give any cost of withdrawal of deviation loading as per Annexure-VIII of GCC, Rev-06 will apply. For any other deviation mentioned in un-priced copy of this format submitted with Part-I bid but not mentioned in priced copy of this format submitted with Priced bid, the cost of withdrawal of deviation shall be taken as NIL.
10. Any deviation mentioned in priced copy of this format, but not mentioned in the un-priced copy, shall not be accepted.
11. All techno-commercial terms and conditions of NIT shall be deemed to have been accepted by the bidder, other than those listed in unpriced copy of this format.
12. Cost of withdrawal is to be given separately for each deviation. In no event bidder should club cost of withdrawal of more than one deviation else cost of withdrawal of such deviations which have been clubbed together shall be considered as NIL.
13. In case nature of cost of withdrawal (positive/negative) is not specified it shall be assumed as positive.
14. In case of discrepancy in the nature of impact (positive/ negative), positive will be considered for evaluation and negative for ordering.