

TELANGANA STATE POWER GENERATION CORPORATION LIMITED

**1x800 MW KOTHAGUDEM THERMAL POWER STATION
STAGE-VII, UNIT#12**

TECHNICAL SPECIFICATION FOR SINGLE GIRDER CRANE

SPECIFICATION NO.: PE-TS-410-524-A001



**BHARAT HEAVY ELECTRICALS LTD
POWER SECTOR PROJECT ENGINEERING MANAGEMENT
NOIDA (U.P.)
INDIA**



TITLE

**1X800 MW KOTHAGUDEM TPS
SINGLE GIRDER EOT CRANES
INDEX**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME: II B

REV 00

30.07 2015

SHEET 1 OF 2

VOLUME – IIB

SECTIONS	TITLE	Page
SECTION-A	INTENT OF SPECIFICATION	4-6
SECTION-B	PROJECT INFORMATION WITH WIND AND SEISMIC DESIGN CRITERIA	7-12
SECTION-C		
SECTION-C1	SPECIFIC TECHNICAL REQUIREMENT	13-30
SECTION-C2	CUSTOMER SPECIFICATION	31-70
SECTION-C3	TECHNICAL SPECIFICATION (ELECTRICAL PORTION)	71-120

SECTION-C4	<u>ANNEXURES</u>		
i)	Scope of Cranes	ANNEXURE-I	121-122
ii)	Painting & Colour Scheme	ANNEXURE-II	123
iii)	List of Makes of Sub-vendor items	ANNEXURE-III	124-129
iv)	Mandatory Spares	ANNEXURE-IV	130-131
v)	Number of drawings/documents for submission	ANNEXURE-V	132
vi)	Distributing Prints	ANNEXURE-VI	133-134
SECTION-D	STANDARD TECHNICAL SPECIFICATIONS		135-150



TITLE

**1X800 MW KOTHAGUDEM TPS
SINGLE GIRDER EOT CRANES
INDEX**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME: II B

REV 00

30.07 2015

SHEET 2 OF 2

VOLUME-III

SECTIONS	TITLE	Page
1	Compliance cum confirmation certificate	151-153
2	Pre Bid Clarification Schedule	154
3	Schedule of Technical Deviation	155
4	List of documents to be submitted with bid	156
	DRAWINGS	
1.	Crane Clearance Diagrams	157-164



**TECHNICAL SPECIFICATION FOR SINGLE
GRIDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - A

Rev 00

30.07.15

Page 1 of 3

**VOLUME - IIB
SECTION – A
SCOPE OF ENQUIRY**



**TECHNICAL SPECIFICATION FOR SINGLE
GRIDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - A

Rev 00

30.07.15

Page 2 of 3

SCOPE OF ENQUIRY

- 1.1 The specification is intended to cover design, engineering, manufacturing, inspection and testing, painting, supply/ delivery duly packed at FOR site including Mandatory spares, erection & commissioning spares, maintenance tools & tackles, all accessories (isolating switch and power cable from isolating switch to DSL including freight and handing over to the customer in line with drawings/ documents/ test procedures approved by BHEL/ Customer for the **SINGLE GIRDER CRANES** for **1X800 MW KOTHAGUDEM TPP**.
- 1.2 The contractor shall be responsible for providing all material, equipment & services, which are required to fulfil the intent of ensuring operability, maintainability, reliability and complete safety of the complete work covered under this specification, irrespective of whether it has been specifically listed herein or not. **Omission of specific reference to any component / accessory necessary for proper performance of the equipment shall not relieve the contractor of the responsibility of providing such facilities to complete the supply of SINGLE GIRDER CRANE.**
- 1.3 It is not the intent to specify herein all the details of design and manufacture. However, the equipment shall conform in all respects to high standards of design, engineering and workmanship and shall be capable of performing the required duties in a manner acceptable to purchaser who will interpret the meaning of drawings and specifications and shall be entitled to reject any work or material which in his judgement is not in full accordance herewith.
- 1.4 The extent of supply under the contract includes all items shown in the drawings, notwithstanding the fact that such items may have been omitted from the specification or schedules. Similarly, the extent of supply also includes all items mentioned in the specification and /or schedules, notwithstanding the fact that such items may have been omitted in the drawing.
- 1.5 The general term and conditions, instructions to tenderer and other attachment referred to elsewhere are made part of the tender specification. The equipment materials and works covered by this specification is subject to compliance to all attachments referred to in the specification. The bidder shall be responsible for and governed by all requirements stipulated herein.
- 1.6 While all efforts have been made to make the specification requirement complete & unambiguous, it shall be bidders' responsibility to ask for missing information, ensure completeness of specification, to bring out any contradictory / conflicting requirement in different sections of the specification and within a section itself to the notice of BHEL and to seek any clarification on specification requirement in the format enclosed under Vol-III of the specification **within 10 days of receipt of tender documents**. In absence of any such clarifications, in case of any contradictory requirement, the more stringent requirement as per interpretation of Purchaser/Customer shall prevail and shall be complied by the bidder without any commercial implication on account of the same. Further in case of any missing information in the specification not brought out by the prospective bidders as part of pre-bid clarification, the same shall be furnished by Purchaser/ Customer as and when brought to their notice either by the bidder or by purchaser/ customer themselves. However, such requirements shall be binding on the successful bidder without any commercial & delivery implication.

	TECHNICAL SPECIFICATION FOR SINGLE GRIDER CRANES 1 X 800 MW KOTHAGUDEM TPP	SPECIFICATION NO. PE-TS-410-524-A001	
		VOLUME - IIB	
		SECTION - A	
		Rev 00	30.07.15
		Page 3 of 3	

1.7 The bidder’s offer shall not carry any sections like clarification, interpretations and /or assumptions.

1.8 Deviations, if any, should be very clearly brought out clause by clause in the enclosed deviation schedule along with cost of withdrawal; otherwise, it will be presumed that the vendor's offer is strictly in line with NIT specification.

1.9 In the event of any conflict between the requirements of two clauses of this specification documents or requirements of different codes and standards specified, Section - C shall prevail over section – D, however more stringent requirement as per the interpretation of the owner shall apply.

1.10 In case all above requirements are not complied with, the offer may be considered as incomplete and would become liable for rejection.

1.11 Unless specified otherwise, all through the specification, the word contractor shall have same meaning as successful bidder /vendor and Customer/ Purchaser/Employer will mean BHEL and/or customer including their consultant as interpreted by BHEL in the relevant context. For details refer the relevant clause in GCC.

Note:
Bidder to note that BHEL reserves the right for drawing/document submission through web based Document Management System. Bidder would be provided access to the DMS for drawing/ document approval and adequate training for the same. Detailed methodology would be finalized during the kick-off meeting. Bidder to ensure following at their end.

- Internet explorer version – Minimum Internet Explorer 7.
- Internet speed – 2 mbps (Minimum preferred).
- Pop ups from our external DMS IP (124.124.36.198) should not be blocked.
- Vendor’s internal proxy setting should not block DMS application’s link (<http://124.124.36.198/wrenchwebaccess/login.aspx>).

6 of 163

VOLUME : IIA

SECTION-II

PROJECT SYNOPSIS AND GENERAL INFORMATION

CONTENT

CLAUSE NO.	DESCRIPTION
1.00.00	INTRODUCTION
2.00.00	APPROACH TO SITE
3.00.00	LAND
4.00.00	SOURCE OF COAL
5.00.00	SOURCE OF WATER
6.00.00	ASH DISPOSAL AREA
7.00.00	SALIENT DESIGN DATA

VOLUME : IIA

SECTION-II

PROJECT SYNOPSIS AND GENERAL INFORMATION

1.00.00 INTRODUCTION

The proposed 1x800 MW Kothagudem Thermal Power Station (KTPS), Stage-VII, Unit-12 would be set up by Telangana State Power Corporation Ltd. (TSGENCO) at Kothagudem, Telangana. The proposed Power Plant will be installed adjacent to the existing D colony of Kothagudem Thermal Power Station, at Kothagudem.

The Bidder shall acquaint himself by a visit to the site, if felt necessary, with the conditions prevailing at site before submission of the bid. The information given here in under is for general guidance and shall not be contractually binding on the Owner. All relevant site data /information as may be necessary shall have to be obtained /collected by the Bidder.

2.00.00 APPROACH TO SITE

Site is located in the existing D Colony of Kothagudem Thermal Power Station, which is at a distance 30 km from temple town of Bhadrachalam and 300 km from Hyderabad by road. The Nearest railway station is Bhadrachalam Road (Known as Kothagudem) at a distance of 12 km. Kothagudem- Bhadrachalam National Highway branches off to the power station site near village Paloncha.

3.00.00 LAND

Land is primarily required for the main plant & auxiliaries (BTG) and balance of plant (BOP) like ash handling, coal storage, cooling tower, switchyard etc., which is available within the existing plant boundary.

The existing colony is to be dismantled, and the land of about 137 acres will be used for the main plant building, water facilities, switchyard, coal handling etc. The raw water reservoir will be located adjacent to the existing raw water reservoirs.

230 acres of land required for Ash Dyke will be procured. Land is available for staff colony, which is to be constructed by the EPC contractor.

4.00.00 SOURCE OF COAL

100% Imported and Blended coal (50% imported + 50% indigenous) will be used. Indigenous coal shall be sourced from Suliya coal mines, Madhya Pradesh.

5.00.00 SOURCE OF WATER

Source of water (total quantity of water is 2192 m³/hr) is Godavari River near Burgampahad & water will be pumped through existing GRP pipe line (of length approx. 26 km).

6.00.00 ASH DISPOSAL AREA

Ash shall be dumped in the ash dump area which will be about 9 km from plant. The ash dyke area of 230 acres is adequate for 1x800 MW unit as per MOEF norms.

7.00.00 SALIENT DESIGN DATA

7.01.00 Meteorological data of site is given below:-

Elevation above MSL : 89 m

Monthly highest temperature : 44.9 °C

Monthly lowest temperature. : 12.9 °C

Rainfall

Average.: 1031 mm

Max. : 100 mm/ hr

Mean Wind speed : 44M/s

Relative Humidity

Max : 82%

Min : 35%

Seismic Zone : Zone-III as per IS- 1893 (Part-IV)

[Climatological data of Khammam is attached for reference].

TABLE - VII

STATION : Khammam										43137 LAT: 17 15 N LONG: 80 09 E HT. ABOVE M.S.L. 112 METERS DATA 1951 TO 1980									
		Mean Temperature					Extremes			Cloud			Rainfall						
MN	SLP	DB	WB	MAX	MIN	HIGH	LOW	MAX DT	MIN DT	RH	VP	TOT LOW	TOT RAINY	WET	DRY	HEAVY	DAY	WS	
1	1003.4	21.2	19.0	30.8	17.9	32.8	14.0	35.0 31	9.4 08	80 20.3	2.1 1.2	4.6	0.2	84.5	0.0	84.5	13	4.3	
	999.1	29.2	20.7					1950	1946	44 17.5	2.3 1.1			1966			1966		
2	1001.5	23.7	20.9	33.7	20.4	36.9	16.9	39.4 21	11.7 03	77 22.6	2.6 2.0	6.0	0.5	45.0	0.0	39.6	18	5.6	
	997.3	32.3	21.9					1969	1943	38 17.9	1.9 0.9			1971			1946		
3	999.7	26.1	23.2	36.8	23.1	39.8	19.8	43.3 28	16.1 01	76 26.0	3.0 2.4	9.8	0.7	129.4	0.0	66.0	18	6.8	
	995.1	35.3	23.5					1953	1952	35 19.5	1.8 0.9			1967			1967		
4	997.2	28.9	25.2	39.0	25.9	42.3	22.5	45.5 30	18.0 17	73 29.1	3.4 2.3	20.7	1.6	125.5	0.0	63.0	20	7.6	
	992.2	37.3	25.1					1973	1972	36 22.2	2.8 1.3			1945			1945		
5	993.2	31.5	26.0	40.9	27.9	44.7	23.4	47.2 25	20.1 14	64 29.2	3.7 1.9	43.6	2.4	465.2	0.0	227.2	20	7.8	
	988.1	38.7	26.2					1947	1971	36 23.8	3.9 2.0			1969			1969		
6	991.2	29.8	25.3	37.0	26.9	42.8	22.8	46.7 03	21.6 19	70 28.6	5.6 2.4	153.3	8.0	351.0	12.5	92.7	17	9.0	
	987.0	34.9	26.3					1953	1961	52 27.2	5.9 3.4			1978	1948		1953		
7	991.4	27.2	24.7	32.6	25.0	36.3	22.6	40.6 07	20.5 21	81 29.1	6.5 3.4	260.2	12.9	494.0	47.6	299.7	10	7.6	
	988.3	30.9	25.8					1966	1959	67 29.0	6.5 4.0			1956	1964		1954		
8	992.2	26.9	24.6	32.0	24.7	35.1	22.6	41.2 16	20.2 23	83 29.1	6.2 3.5	200.4	11.5	483.5	29.2	143.2	15	6.5	
	988.9	30.1	25.7					1972	1961	70 29.4	6.4 4.0			1970	1941		1978		
9	994.4	27.1	24.8	32.7	24.5	35.9	22.3	37.6 22 *	20.6 30	82 29.5	5.3 2.6	184.7	9.0	413.9	34.9	177.4	07	4.5	
	990.7	30.1	25.5					1977	1942	69 29.0	6.0 3.6			1975	1973		1968		
10	998.0	26.6	24.2	32.5	23.3	35.5	19.7	39.6 30	16.0 31	81 28.2	3.9 2.2	114.3	6.9	264.3	14.0	130.8	08	3.1	
	994.4	29.8	24.3					1978	1974	63 26.0	4.9 2.8			1974	1957		1941		
11	1001.6	23.7	21.0	30.9	19.9	33.3	15.8	35.4 04	11.7 30	77 22.8	3.2 1.4	29.1	1.6	166.9	0.0	86.4	09	3.3	
	998.0	28.6	21.7					1965	1941	54 20.6	3.6 1.9			1946			1946		
12	1003.6	20.8	18.4	29.9	17.1	32.0	13.5	34.6 01	9.7 13	78 19.3	2.5 0.9	4.9	0.4	57.0	0.0	33.0	13	3.0	
	999.6	27.8	20.1					1972	1966	46 17.3	2.6 1.2			1969			1969		
YR	997.3	26.1	23.1	34.1	23.1	44.9	12.9	47.2	9.4	77 26.2	4.0 2.2	1031.6	55.7	1832.3	530.8	299.7		5.8	
LY	993.2	32.1	23.9							51 23.3	4.1 2.3			1969	1952				
YRS	30	30	30	30	30	30	30	39	39	30	30	30	30	39	39	39	39	28	
* Occurred More Than Once																			

* Occurred More Than Once

STATION : Khammam

43137 .. contd

MN	Weather					Wind speed			% Wind Direction								Total Cloud				Low cloud				Visibility										
	PPT	HAIL	THUN	FOG	D.STM	SQUA	62	61	19	0	N	NE	E	SE	S	SW	W	NW	0	0	T-2	3-5	6-7	8	0	T-2	3-5	6-7	8	F8	<1	1-4	4-10	10-20	>20
1	0.5	0.0	0.1	1.7	0.0	0.0	0	0	15	16	6	3	29	10	3	1	0	1	47	17	4	4	4	2	23	3	2	2	1	0	1.4	5.2	5.5	18.1	0.8
							0	0	18	13	4	2	33	12	7	2	1	1	38	13	7	6	4	1	19	7	4	1	0	0	0.0	0.1	5.8	24.1	1.0
2	0.7	0.0	0.2	0.8	0.0	0.0	0	0	21	7	2	2	30	33	9	1	0	1	22	11	5	4	6	2	16	4	3	4	1	0	0.2	3.5	6.5	17.2	0.6
							0	0	19	9	5	2	27	17	11	3	5	2	28	13	7	5	3	0	18	6	3	1	0	0	0.0	0.0	4.1	23.2	0.7
3	0.8	0.0	0.3	0.1	0.0	0.0	0	0	28	3	1	2	29	39	18	1	0	0	10	11	4	6	8	2	15	4	5	6	1	0	0.0	3.4	5.9	21.6	0.1
							0	0	22	9	3	1	17	19	22	6	5	1	26	16	6	5	3	1	20	7	3	1	0	0	0.0	1.1	5.5	23.5	0.9
4	1.9	0.0	1.4	0.0	0.6	0.0	0	0	27	3	2	1	21	37	25	3	1	0	10	7	6	8	8	1	12	6	6	5	1	0	0.0	2.0	6.5	20.7	0.8
							0	0	21	9	3	1	17	20	22	5	4	1	27	10	6	8	5	1	15	9	4	2	0	0	0.0	0.7	4.3	22.8	2.2
5	3.4	0.0	2.5	0.0	1.2	0.0	0	0	26	5	6	1	13	22	18	8	13	5	14	7	5	7	8	4	16	5	5	3	2	0	0.0	1.8	5.7	22.0	1.5
							0	0	23	8	12	2	15	12	12	5	13	5	24	6	6	9	8	2	11	10	7	2	1	0	0.0	0.6	5.3	22.6	2.5
6	10.6	0.0	2.6	0.0	0.2	0.0	0	1	25	4	5	1	3	2	4	13	45	14	13	3	2	5	10	10	15	4	4	2	5	0	0.0	1.8	6.6	19.5	2.1
							0	0	24	6	10	0	7	2	8	12	37	7	17	1	2	7	11	9	7	8	8	3	4	0	0.0	1.1	5.5	21.4	2.0
7	16.2	0.0	1.0	0.0	0.0	0.0	0	0	26	5	2	0	1	2	5	20	47	9	14	1	1	4	10	15	11	3	7	3	7	0	0.0	3.1	7.7	18.1	2.1
							0	1	24	6	7	0	2	2	4	10	45	9	21	0	1	5	11	14	5	6	10	4	6	0	0.0	2.2	5.4	21.6	1.8
8	15.8	0.0	0.8	0.0	0.0	0.0	0	0	25	6	3	0	1	2	3	15	49	11	16	2	1	5	12	11	10	4	7	4	6	0	0.0	2.6	5.7	20.4	2.3
							0	0	22	9	10	1	2	2	2	8	39	10	26	1	1	6	12	11	6	6	10	4	5	0	0.0	2.6	4.7	21.9	1.8
9	11.8	0.0	1.7	0.0	0.0	0.0	0	0	20	10	9	1	4	1	6	10	29	8	32	3	3	7	10	7	12	6	6	3	3	0	0.1	1.8	5.8	20.4	1.9
							0	0	20	10	16	2	9	3	4	5	24	8	29	0	2	7	12	9	4	8	10	4	4	0	0.0	2.1	4.0	22.2	1.7
10	9.0	0.0	0.9	0.0	0.0	0.0	0	0	15	16	14	4	13	4	3	2	5	5	50	8	5	6	7	5	15	5	5	3	3	0	0.0	2.7	5.8	20.6	1.9
							0	0	17	14	14	6	23	4	3	2	3	2	43	5	3	8	10	5	9	8	8	3	3	0	0.0	1.8	5.5	22.4	1.3
11	2.3	0.0	0.4	0.1	0.0	0.0	0	0	14	16	17	5	20	3	1	1	1	3	49	8	6	6	7	3	20	4	3	2	1	0	0.0	4.5	5.3	19.6	0.6
							0	0	16	14	11	8	32	4	2	0	1	1	41	8	5	7	6	4	14	7	5	2	2	0	0.0	1.3	4.8	22.7	1.2
12	0.8	0.0	0.0	0.6	0.0	0.0	0	0	13	18	18	4	15	5	1	0	0	2	55	14	5	4	6	2	26	1	2	1	1	0	0.5	4.8	5.7	20.0	0.0
							0	0	15	16	6	6	34	3	2	0	1	1	47	13	6	6	5	1	21	5	3	1	1	0	0.0	0.4	5.8	24.5	0.3
YR	73.8	0.0	11.9	3.3	2.0	0.0	0	1	255	109	7	2	15	13	8	6	16	5	28	92	47	66	96	64	191	49	55	38	32	0	2.2	37.2	72.7	238.2	14.7
LY							0	1	241	123	8	3	18	8	8	5	15	4	31	86	52	79	90	58	149	87	75	28	26	0	0.0	14.0	60.7	272.9	17.4



TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP

SPECIFICATION NO. PE-TS-403-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 1 of 6

VOLUME - IIB

SECTION – C1

SPECIFIC TECHNICAL REQUIREMENTS



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-403-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 2 of 6

1.0.0 SCOPE OF WORK**1.1.0 SUPPLIES**

1.1.1 Equipment and services to be furnished by the bidder for the Single Girder EOT with accessories as per the details given in data sheet A. Any equipment / accessories not specified in the specification but required to make the crane units complete and efficient shall also be under the bidder's scope of work.

Each EOT crane shall include all necessary items but shall not be limited to the following: -

1. Bridge girder.
2. End carriages complete with wheels
3. Electric Hoist
4. CT / L T drive arrangement
5. Electrical equipments
6. PVC Shrouded Conductor Bus Bar Type DSL with accessories for entire bay length
7. Rail for overhead & semi gantry crane only
8. Earthing arrangement.
9. Painting of crane.
10. Fill of lubricant.
11. O & M Manual, drawings and documents.
12. Main isolating switch and power cable from 1.5M above ground / operating floor to down shop lead.

1.1.2 Maintenance Tools and Tackles

A complete unused new set of tools & tackles and accessories along with detailed instructions and maintenance manual for the crane shall be supplied. Each tool and wrench shall be stamped, so as it can be easily identified for use. The tools shall be supplied in steel toolbox and with a copy of instruction manual. The items supplied shall be of the best quality and specially protected against rusting in tropical climate and minimum the following shall be provided.

S. No.	Description	Qty.
1	Complete set of ring spanners (Indicate the sizes offered)	1 Set
2	Complete set of screwdrivers (Min. 6 nos. Indicate the sizes)	1 Set
3.	Adjustable Spanner	1 No.
4.	Insulated pliers	1 No.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-403-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 3 of 6

- | | | |
|----|----------------|-------|
| 5 | Wrench spanner | 1 No. |
| 6. | Grease Gun | 1 No. |
| 7. | Oil Gun | 1 No. |
| 8. | Hand Lamp | 1 No. |
| 9 | Line tester | 1 No. |

Note: All maintenance tools & tackles are to be supplied in a tool box. Bidder to include additional tool, if required over and above specified.

1.1.3 Erection and commissioning spares (as indicated in price format)

1.1.4 Mandatory Spares as per Annexure-II

1.2.0 Services to be provided by the bidder

1.2.1. Packing, forwarding and transportation to site.

1.2.2. Erection and commissioning procedure shall be submitted by successful bidder for carrying out the erection and commissioning at site by customer.

1.3.0. Inspection and Testing

1.3.1. Inspection and testing at Manufacturer's works

A. Shop inspection and tests will include but not limited to the following -

- i. Identification, co -relation and verification of material test certificates for the important components like girders, major load carrying components, hooks, gears, shafts, wheels, wire rope drum, wire rope, gear box etc. For other components supporting test certificates or random check tests shall be conducted.
- ii. Qualification of welder and welding procedure as per ASME section IX of ASTM -7.1
- iii. 100% radiography of tension zone & 25% radiography of compression butt welds of load bearing members shall be carried over and all butt welds as per ASME- 165/ASTME 109 and acceptance norm as per ASME Section viii Div.1.
- iv. For fillet welds visual inspection on all welds. Die penetration test (DPT) for fillet welds in the load bearing members as per ASME-165/ASTME 109 and acceptance norm as per ASME section VIII Div. 1.
- v. Ultrasonic test on forgings and casting of critical components like hook, shafts, axles, gears, wheels, pulleys, etc. Ultrasonic test for casting as per ASME Section III NB 2572 & for forging as per ASTM A388.

Unacceptable defects in forgings are as given below: -

1. Cracks, flaws, seams and laps.
2. Defects giving indication larger than 4mm diameter equivalent flaw.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-403-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 4 of 6

3. Groups of defects with maximum indication less than that from a 4mm dia, equivalent flaw, which cannot be separated at testing sensitivity if the back echo is reduced by 50%.
4. Defects giving indication of 2 to 4 mm diameter equivalent flaw separated by a distance less than 4 the size of the larger of the adjacent flaws.
- vi. PT/MT on component with surface hardening as per ASTM E -165 and ASTM E 138 respectively with no surface defects.
- vii. Gearbox trial run test as per AGMA standards.
- viii. Verification of valid type test certificates and enclosure for electrical and electro mechanical items. If type test certificates of the similar items are not available, arrangement shall be made to conduct the same in the presence of BHEL/ Customers representative.
- ix. Acceptance and routine tests (HV and insulation) for all electrical and electromechanical components and system as per governing specification
- x. Functional and simulated operation test, sequencing, interlocks, safety, protection and alarm system. Test on CRANE / CRAB motors and other mechanical, electrical, electro-mechanical as per BHEL technical specification and or as per applicable code
- xi. Cranes shall be completely assembled at manufacturers' works to check the misalignment of gears, shafts and other items. Gear box shall have the idle run for minimum two (2) hours.

B. Testing At Works

- i. Deflection test of bridge girder at rated load.
- ii. No load / load (SWL) / Over load test (running of CT at full load & hoisting mechanism at 125% of rated load.)
- iii. Electrical tests for brakes, panel, electrical equipment etc. as per IS - 3177
- iv. Measurement of speed of CT & Hoisting (lowering & raising) at rated load.
- v. All Other tests as per IS-3177.

Note: Refer Annexure-III, Section-C, Volume II-B for “Shop test Procedure for Load/Overload testing of EOT cranes at Manufacturer’s Works.

1.3.2 Testing at site

The following tests shall be carried out at site by **BHEL** as a part of Erection and Commissioning: -

- a) All the tests as mentioned against S.N. 1.3.1 (B) above, with actual hook and wire rope.
- b) Speed test at rated load for hoisting / CT and LT mechanism.
- c) Brake test and working of electric hoist.
- d) Any other test as per IS-3177-1999.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-403-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 5 of 6

The successful bidder shall furnish their recommended procedure for carrying out the Erection, Commissioning & testing at site as mentioned above..

1.4.0 SURFACE PREPARATION, PAINTING & COLOUR SCHEME

Detailed painting procedure has been attached as Annexure IV, Section C, Volume IIB. Bidder shall follow the same.

1.4.1. Color Scheme

Color-coding procedure shall be as per enclosed Annexure-IV, Section C, Volume IIB.

1.5.0. Drawing / design document for submission.

Drawing/ design documents to be submitted as per list & submission schedule attached as Annexure-V.

Any other design document/ drawing as required by customer/ BHEL shall be submitted by bidder during detail engineering without any implication.

2.0.0. Works Excluded

2.1.0 Supply of steel gantry girders

2.2.0 For EOT crane:

The purchaser shall provide single point 415V, 3 phase, 4 wire and 50Hz power feeder at any point of the bay or in the middle of the bay as specified in the Data sheet A. Vendor shall provide main isolating switch at 1.5 M above the ground / operating floor level and cable required from isolating switch to DSL.

Any other supply required by the bidder shall be arranged by the bidder himself by using suitable transformer as per the specification.

3.0.0. Number of drawing and documents for submission

The number of prints / copies required for various drawing and documents are listed in Annexure –V, section-C, volume II-B of this specification.

4.0.0. Deviations

If the proposal submitted has got any deviation from the technical stipulations in the tender document, bidder shall tabulate the same in the “Schedule of Deviations” furnishing full particular of such deviations. Deviations are to be furnished with mention to specific clause number. Reasons / explanations for such deviations shall be furnished .Notes / comments etc. is not acceptable. If there are no deviations from the tender document, bidder shall indicate ‘NO DEVIATION’ in the deviation format attached in volume III.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-403-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 6 of 6

5.0.0. Make of Sub - Vendor items

Reference makes of bought out items will be as per Annexure-II, section C, volume II-B of the specification. No other make will be acceptable, until and unless specifically got approved by BHEL/Customer during detail engineering. Acceptance/non acceptance of same shall not have any impact on manufacturing & delivery schedule and on cost of crane.

6.0.0 INFORMATION TO BE FURNISHED BY BIDDER ALONG WITH THE OFFER

As detailed in volume-III



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 1 of 7

TECHNICAL DATA SHEET FOR SINGLE GIRDER EOT CRANE

S.N.	Description	Technical Particulars
1.0.0	GENERAL	
1.1.0	Name of Manufacturer	
	a) EOT Crane	*
	b) Crane motors	*
	c) Control Equipments	*
	d) Runway conductors	*
1.2.0	WEIGHT OF EQUIPMENTS	
	a) Crane weight (Kgs.)*	*
	b) Weight of DSL (Kgs.)*	*
1.3.0	Design, fabrication and testing of crane conform to standard / code	IS-3177 & 807 (latest edition)
1.4.0	Number of cranes	Refer Annexure-I/Section C-4
1.5.0	Crane Classification	Group M5 of IS: 3177 – 2006(latest edition) for structure and machinery.
1.6.0	Type of service	Indoor/Outdoor
1.7.0	Type of Crane	Refer Annexure-I/Section C-4
1.8.0	Capacity (SWC)	Refer Annexure-I/Section C-4
1.9.0	Span	Refer Annexure-I/Section C-4
1.10.0	Lift	Refer Annexure-I/Section C-4
1.11.0	Over Load Test	(125% of rated capacity-SWC)
1.12.0	Crane structure	Single girder
1.13.0	Design ambient temperature	50° C
1.14.0	Runway Rail	By Bidder for overhead & semi-gantry crane only
1.14.1	Type & Size	As per IS 3443.
1.14.2	Material	As per IS 3177.
1.14.3	Weight per metre	*
1.15.0	End carriage	
1.15.1	Material	M.S. as per IS: 2062, GR B
1.15.2	Manufacturer	*



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 2 of 7

1.16.0	Main girder	
1.16.1	Type & Size	Single girder/Braced I beam/Fabricated section
1.16.2	Material	M.S. as per IS: 2062, GR B
1.16.3	Vertical Deflection	Span/900
1.16.4	Manufacturer	As per Sub-vendor list
1.17.0	Power supply	415V $\pm$ 10%, 3 phase, 4 wire, 50 Hz+5% -5% variation. Combined voltage and frequency variation 10% (Shall be arranged by Purchaser at 1.5 M above floor level / operating level)
1.18.0	Control Supply	24 V/110V (Shall be arranged by vendor)
1.19.0	Load test	As per IS: 3177
2.0.0	CRANE PERFORMANCE	
2.1.0	Operation	Electrical -- From floor by means of Pendant Push Button controller suspended from panel
2.2.0	Crane speed with full load	
	a) Hoist (Full speed)	3 M/Min
	b) Hoist (Creep speed)	(10% of main speed through VVVF drive)
	c) Cross travel (CT)	10.0 M/min
	Cross travel (creep speed)	NA
	d) Longitudinal bridge travel (LT)	15.0 M/min
	Longitudinal bridge travel (LT)	NA
2.3.0	Hoisting Mechanism	Gear
2.4.0	Type of power transmission	Gear
2.5.0	WIRE ROPE	
2.5.1	Make	As per Sub-vendor list
2.5.2	Core / Construction	Steel core as per IS-2266 / 6 X 36
2.5.3	Wire rope dia. (mm)	*
2.5.4	Wire rope fall	*
2.5.5	Material	Plough steel
2.5.6	Tensile strength	160-180 Kg /mm ²
2.5.7	Min. Breaking load	*
2.5.8	Conform to (Std. / code)	IS-2266



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 3 of 7

2.5.9	Factor of safety	6		
2.6.0	LOAD HOOK / HOOK BLOCK			
2.6.1	Make	As per sub-vendor list		
2.6.2	Type of load hook	C shank, Trapezoidal section-forged as per IS: 15560, with safety latch.		
2.6.3	Material of load hook	Forged steel		
2.6.4	Type of Bearing of hook suspension	Thrust ball bearing		
2.6.5	Make of Bearing of hook suspension	*		
2.6.6	Type and Material of hook suspension.	M.S. Fabricated		
2.7.0	ELECTRIC HOIST			
2.7.1	Model No.	*		
2.7.2	Duty	Class II (M5) as per IS: 3938 (latest edition)		
2.8.0	Type of DSL			
2.8.1	Long travel	PVC shrouded Cu conductor type		
2.8.2	Cross traverse	Flexible cable with Taut wire / Festoon cable arrangement		
2.9.0	MOTORS	M.H.	C.T.	L.T.
2.9.1	Make	As per sub-vendor list		
2.9.2	Rating (KW)	*		
2.9.3	RPM	*		
2.9.4	Qty.	1	1	2
2.9.5	Maximum number of poles	6	6	6
2.9.6	Type	TEFC, Sq. cage induction type,S4 duty, 40%CDF		
2.9.7	Enclosure	IP-55		
2.9.8	Number of start	150 starts/Hr.		
2.9.9	Insulation	Class "F" temp. rise limited to class "B"		
2.9.10	Margin	Maximum continuous motor ratings shall be 15% above the maximum load demand of the driven equipment under entire operating range including voltage and frequency variations.		
2.9.11	Over load protection provided	YES		
2.9.12	Ambient Design temperature	50°C		
2.10.0	LIMIT SWITCHES			
2.10.1	Location	M.H.	C.T.	L.T



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 4 of 7

2.10.2	Qty.	1+1	1	1
2.10.3	Type	Gravity / Rotary gear	Two way lever	Two way lever
2.10.4	Method of actuation	Snap action	Shunt type	Shunt type
2.10.5	Material of contact	Silver Cadmium		
2.10.6	Make	As per Sub-vendor list		
2.10.7	Control Voltage	110V		
2.11.0	Control panel	A suitable control panel will be provided comprising of main contractor, motor contactor, single phase preventor with overload relays, transformer, fuses, MCCB's, etc. Rectifier panel for brake shall also be provided		
2.12.0	BRAKES			
2.12.1	Location	M.H.	C.T.	L.T.
2.12.2	Qty. / Motor	1	1	1
2.12.4	Type	DCEM Disc Type	DCEM Disc Type	DCEM Disc Type
2.12.5	Capacity	150% FLT	125% FLT	125% FLT
2.12.6	Size / rating	*		
2.12.7	Make	As per sub-vendor list		
2.13.0	GEAR (HOISTING)			
2.13.1	Make	As per sub-vendor list		
2.13.2	Type	Spur / Helical		
2.13.3	Material	Gear: EN8 / 20 Mn Cr5 / 16 Mn Cr5 Pinion: EN9/EN19		
2.13.4	Lubrication	Grease / Oil splash		
2.13.5	Reduction	*		
2.13.6	Bearing Make	*		
2.13.7	Bearing Type	Antifriction deep groove ball / roller bearing		
2.13.8	Hardness (BHN)	As per IS 3177 (Latest Edition)		
2.14.0	GEAR (L.T. & C.T.)			
2.14.1	Location	C.T.	L.T.	
2.14.2	Make	As per sub-vendor list		
2.14.3	Type	Spur / Helical	Spur / Helical	
2.14.4	Material	Gear: EN8 / 20 Mn Cr5 / 16 Mn Cr5 Pinion: EN9/EN19	Gear: EN8 / 20 Mn Cr5 / 16 Mn Cr5 Pinion: EN9/EN19	



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 5 of 7

2.14.5	Lubrication	Grease / Oil splash	Grease / Oil splash
2.14.6	Reduction	*	*
2.14.7	Bearing Make	As per sub-vendor list	
2.14.8	Bearing Type	Antifriction deep groove ball / roller bearing	Antifriction deep groove ball / roller bearing
2.14.9	Hardness (BHN)	As per IS 3177 (Latest Edition)	
2.15.0	WIRE ROPE DRUM		
2.15.1	Material	Fabricated from M.S. as per IS: 2062, Gr B and stress relieved or seamless pipe ASTM A106 Gr B	
2.15.2	Diameter	*	
2.15.3	Length	*	
2.15.4	Type	Flanged	
2.15.5	Type of grooves	*	
2.16.0	WHEELS		
2.16.1	Location	C.T.	L.T.
2.16.2	Diameter (mm)	*	*
2.16.3	Qty	*	*
2.16.4	Hardness	200 BHN (Max.)	As per IS 3177.
2.16.5	Material	EN8 / EN9	EN8 / EN9
2.16.6	Bearing make		
2.16.7	Bearing Type	Antifriction deep groove ball bearing	Antifriction deep groove ball bearing
2.16.8	Flange	Single	Single/double flanged
2.16.8.1	Conform to IS	3177	
2.16.8.2	Wheel Base	*	
2.17.0	SHEEVE		
2.17.1	Material	Cast steel	
2.17.2	Groove dia/ O.D. (mm)	*	
2.17.3	Bearing make	As per sub-vendor list	
2.17.4	Bearing Type	Antifriction deep groove ball bearing	



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 6 of 7

2.18.0	CONTROL PANEL	* Fabricated from CRCA steel sheet min 2 mm thick. * Degree of protection shall be IP 55. * Power on indicating lamps shall be provided * Panel illumination lamps operated by door switch. * 2 nos. earthing terminals on panel. * 20 % spares terminals (clip on type) shall be provided. * Power and control terminals (clip on type) shall be on separate channels. * Gland plate thickness shall be minimum 3mm. * Gland plate shall be double brass compression type.	
2.18.1	Qty	One	
2.18.2	Make	As per sub-vendor list	
2.18.3	Location	On the crane	
2.18.4	Size	*	
2.18.5	Thickness of sheet	2 mm	
2.19.0	ISOLATING SWITCH		
2.19.1	Qty	One (1) no at 1.5 m from operating floor.	
2.19.2	Make	As per sub-vendor list	
2.19.3	Rating	*	
2.20.0	PENDANT PUSH BUTTON	Up /down / forward / Reverse push buttons (glow type) Indicative marking for easy operation shall be provided with indicating lamps	
2.21.0	Cables	Power	Control
2.21.1	Make	As per Sub-vendor list	
2.21.2	Material	As per requirement detailed elsewhere in specification.	
2.21.3	Type	*	*
2.21.4	Dearing factor to be considered	YES	YES
2.21.5	Voltage grade	1100V	
2.22.0	END STOPPER		
2.22.1	Qty.	4 Nos.	
2.22.2	Material	As per IS 2062	
2.23.0	BUFFER		
2.23.1	Location	CT	LT
2.23.2	Qty	Two	Four
2.23.3	Material	Rubber/Spring	Rubber/Spring



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANES
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION – C-1

Rev 00

30.07.15

Page 7 of 7

2.24.0	PAINTING	Refer painting specification
2.25.0	Control for Hoisting operations	Thru' VVVF drives
a.	Speed Control	Thru' VVVF with minimum 6 pulse design
b.	Starting torque of VVVF	Upto 400% typical
c.	Starting current	Less than 150 % of rated torque
d.	Temperature	Capable of withstanding upto 50°C without derating

Note:

- Bidder to confirm the compliance of technical details as mentioned against each item. Deviation, if any shall be brought out clearly.
- The bidder shall fill Technical details against each item marked (*), during detailed engineering only.
- In case of discrepancy between the Data sheet and requirement given elsewhere in the technical specification, the more stringent of the two as per the interpretation of purchaser shall be applicable.
- For outdoor application crane anchorage and other requirement as per IS 3177 shall be fulfilled.

MANUFACTURER'S NAME & ADDRESS		MANUFACTURING QUALITY PLAN					PROJECT: 1x800 KOTHAGUDEM TPP						
		ITEM: EOT CRANES - SINGLE GIRDER CRANE CAPACITY:					REV	Rev 00	PACKAGE: Single Girder EOT Crane				
							DATE	30.07.15	P.O.NO –				
							PAGE	Page 1 of 5	BHEL NO:				
							CONTRACTOR: BHEL						
S.NO.	Component & Operation	Characteristics	Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	Agency			Remark	
1	2	3	4	5	6	7	8	9	D	M	C	N	11
FOR EOT CRANE													
1.0	RECEIVING INSPECTION												
1.1	Structural-Plates/RSJ for Main Girders, End Carriages Trolley, Pulley, Gearbox housing , rope drum (if fabricated) etc.	Physical & Chemical	Major	Lab Analysis	100%	IS:2062 Gr. A or B / As per approved G.A.		MTC / Lab Report	✓	P/V	V	V	
1.2	Rope Drum (Seamless Pipe)	Chemical Mechanical	Major	Lab Analysis	1/pipe	Approved drg/DS ASTM A106 Gr A or B		Lab Report	✓	P	V	V	
1.3	Gears, pinions, shafts, axles & wheels (#)	Flattening & Acid etching Test Surface defect	Major	Mech test Visual	1/pipe 100%	no cracks, pitting, rusting, damage ,etc		I.R.	✓	P	V	V	
		Chemical& Mechanical,	Major	Lab Analysis	1/lot 100%	IS:2004 (45C8/55C8) (Relevant IS/appd drg)		MTC	✓	P	V	V	
			Major	UT	100%	ASTM A388/NOTE 1		I.R	✓	P	V	V	
1.4	Hook	Chemical & Mechanical	Major	Lab Analysis	100%	IS: 15560 Related Std. As per appd. Drg./data sheet		MTC	✓	V	V	V	
		UT (above 50 mm dia)	Major	UT on shank portion only	100%	ASTM A388 / ASME Sec VIII Divn 2 – NOTE:1		MTC/ ALC/Q CR /UT report	✓	P	V	V	
LEGEND: CLASS A: Critical, B: Major, C: Minor													
** M: MANUFACTURER / SUB-CONTRACTOR D: Records for Data Fold C: CONTRACTOR /NOMINATED INSPECTION AGENCY, ND: NDT LAB N: Customer R: Test / Dim Report, IR-Inspection Report INDICATE "P" PERFORMS, "W" WITNESS, MTC: Mfr's Test Cert. "V" VERIFICATION, ALC: Approved Laboratory Certificate, QCR: Quality Control Report													
DOC. NO.:													
MANUFACTURER NAME & SIGNATURE									CONTRACTOR				
NAME & SIGNATURE									NAME & SIGN OF APPROVING AUTHORITY & SEAL				

MANUFACTURER'S NAME & ADDRESS		MANUFACTURING QUALITY PLAN				PROJECT: 1x800 KOTHAGUDEMM TPP							
		ITEM: EOT CRANES - SINGLE GIRDER CRANE		REV	Rev 00	PACKAGE: Single Girder EOT Crane							
		CAPACITY:		DATE	30.07.15	P.O.NO -							
				PAGE	Page 2 of 5	BHEL NO:							
				CONTRACTOR: BHEL									
S.NO.	Component & Operation	Characteristics	Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	Agency		Remark		
1	2	3	4	5	6	7	8	9	D	M	C	N	11
1.5	Wire Rope	Examination of report of breaking load	Major	Review of TC	100%	IS: 2266 Appd G A drg	IS: 2266 Appd G A drg	Mfr's TC QCR	— /	P	V	V	
1.6	Motors & cables. Brakes	Type, construction Make/Type/Rating/ Routine test Make/ type / rating/ HV/IR functional test	Major	Visual / Measurement	100%	Appd drg/DS/Tech spec/Rel IS		I.R STC	— /	P	V	V	For motor, ref. Note 2
1.7	Sheaves	Mech		Tensile & Hardness	1/lot	Approved Drg / Mfg drg		MTC	— /	P	V	V	
1.8	Limit switch, SFU, Relays, MCB, Fuses, Push buttons Etc Control transformer	Make/Type/Rating Functional /continuity Make, type, rating, input/output	Major	Review of TC	100%	Appd drg./DS/Scheme/ Spec./Manu.Std		QCR Routine TC/COC of mfg	— /	V	V	V	
1.9	DSL	Make, type, rating, Dimension.	Major	Review of TC	100%	Appd drg./DS/Scheme ./ Manu.Std		QCR Routine TC/COC of mfg.	— /	V	V	V	
2	INPROCESS- INSPECTION												

LEGEND: CLASS A: Critical, B: Major, C: Minor		DOC. NO.:
** M: MANUFACTURER / SUB-CONTRACTOR D: Records for Data Fold C: CONTRACTOR /NOMINATED INSPECTION AGENCY, ND: NDT LAB N: Customer R: Test / Dim Report, IR-Inspection Report INDICATE "P" PERFORMS, "W" WITNESS, MTC: Mfr's Test Cert. "V" VERIFICATION, ALC: Approved Laboratory Certificate, QCR: Quality Control Report		
MANUFACTURER	CONTRACTOR	
NAME & SIGNATURE		NAME & SIGN OF APPROVING AUTHORITY & SEAL

MANUFACTURER'S NAME & ADDRESS		MANUFACTURING QUALITY PLAN					PROJECT: 1x800 KOTHAGUDEMM TPP						
		ITEM: EOT CRANES - SINGLE GIRDER CRANE			REV		Rev 00		PACKAGE: Single Girder EOT Crane				
		CAPACITY:			DATE		30.07.15		P.O.NO -				
					PAGE		Page 3 of 5		BHEL NO:				
									CONTRACTOR: BHEL				
S.NO.	Component & Operation	Characteristics	Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	Agency			Remark	
1	2	3	4	5	6	7	8	9	D	M	C	N	11
2.1	WPS,PQR & WPQ	Verification of approval				WPS,PQR & WPQ			✓	P	V	V	Llyod/EIL/NPCIL approved WPS to be used. Procedure & welders qualified by Llyod/EIL/NPCIL be used/ deployed.
2.2	Assembled gear box	No load run test backlash & contact pattern, noise, vibration & oil temp rise (for oil lubricid)	Major	Performance	100%	Apprvd drg/DS/Mfg std Noise 85dba max, vibration 75 microns max, oil temp rise – 30 °C above ambient max			✓	P	V	V	
2.3	Welding of end carriage, Main Girder, Trolley , rope drum (if fabricated) etc.,	DPT of Welds(all) RT of Butt weld	Major Major	LPI RT	100% on butt&10% on fillet 100%/10%	ASTM E165 or Eq. / No crack or linear indication ASME Sec.VIII,Div.1, UW 51/52		I.R. RT film & report	✓ ✓	P P	V V	V V	@RT-100%, for Butt weld in tension & 25% in compression. 100% RT on butt weld for fabricated rope drum
2.4	Hook	Dimension Proof Load NDT after proof load	Major Major Major	Measurement Load Test LPI	100% 100%	Mfr's drg / Related Std. As per appd. Drg/data sheet/ IS: 15560 ASTME 165 or Eq. / No crack or linear indication		QCR QCR I.R.	✓ ✓	P P P	V V V	V V V	
2.5	Gears, pinions, shafts, axles & wheels (#)	Hardness Surface Defect (after machining)	Major	DPT	100%	Approved Drg/ Data sheet ASTM E-165 No linear indication		MTC	✓	P	V	V	
3	FINAL INSPECTION												

		LEGEND: CLASS A: Critical, B: Major, C: Minor		DOC. NO.:
		** M: MANUFACTURER / SUB-CONTRACTOR D: Records for Data Fold C: CONTRACTOR /NOMINATED INSPECTION AGENCY, ND: NDT LAB N: Customer R: Test / Dim Report, IR-Inspection Report INDICATE "P" PERFORMS, "W" WITNESS, MTC: Mfr's Test Cert. "V" VERIFICATION, ALC: Approved Laboratory Certificate, QCR: Quality Control Report		
MANUFACTURER	CONTRACTOR	NAME & SIGN OF APPROVING AUTHORITY & SEAL		
NAME & SIGNATURE				

MANUFACTURER'S NAME & ADDRESS		MANUFACTURING QUALITY PLAN					PROJECT: 1x800 KOTHAGUDEM TPP						
		ITEM: EOT CRANES - SINGLE GIRDER CRANE CAPACITY:					REV	Rev 00	PACKAGE: Single Girder EOT Crane				
							DATE	30.07.15	P.O.NO –				
							PAGE	Page 4 of 5	BHEL NO:				
							CONTRACTOR: BHEL						
S.NO.	Component & Operation	Characteristics	Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	Agency				Remark
1	2	3	4	5	6	7	8	9	D	M	C	N	11
3.1	Overall dimensions	Dimensions (span) level, alignment	Critical	Measurement	100%	Appd GA drg & IS: 3177/IS:3938		I.R.	✓	P	W	V	FUNCTIONAL CHECK OF PENDENT &
3.2a	Assembled Crane along with individual control panel & pendant station	Current & speed for Cross Travel & Hoisting, interlocking sequencing, inching operation, Limit switch operation	Critical	Measure /Verify	100%	Appd GA drg & IS: 3177/Appd data sheet		I.R.	✓	P	W	V	PANEL FOR SPECIFIC CRANE
3.2b	Overload test at 125% of SWL	Holding capacity of brakes		Measurement	100%	Appd GA drg & IS: 3177/ IS:3938/ Appd data sheet		I.R.	✓	P	W	V	
3.3	Control Panel & Pendant station	1. Make/type/rating of BoIs. 2.IR-HV functional &interlocks 3.DOP by paper insertion for panel	Major	Visual, Operational & Functional Measurement do	100%	Approved drawing / Data sheet / is: 3177		I.R.		P	W	V	HV of power circuit at 2KV and control circuit at 1KV, IR of power & control circuit with 500V Meggar with acceptance norm of 0.5 Mega Ohm.
3.4	Painting	Examination – shade	Minor	Visual & measurement	100%	Customer's / Approved Painting Procedure				P	V	-	
		Dry FilmThickness	Major	Measurement	Sample					P	V	-	

		LEGEND: CLASS A: Critical, B: Major, C: Minor		DOC. NO.:
		** M: MANUFACTURER / SUB-CONTRACTOR D: Records for Data Fold		
		C: CONTRACTOR /NOMINATED INSPECTION AGENCY, ND: NDT LAB		
		N: Customer R: Test / Dim Report, IR-Inspection Report		
		INDICATE "P" PERFORMS, "W" WITNESS, MTC: Mfr's Test Cert.		
		"V" VERIFICATION, ALC: Approved Laboratory Certificate,		
		QCR: Quality Control Report		
MANUFACTURER	CONTRACTOR			NAME & SIGN OF APPROVING AUTHORITY & SEAL
NAME & SIGNATURE				

MANUFACTURER'S NAME & ADDRESS			MANUFACTURING QUALITY PLAN					PROJECT: 1x800 KOTHAGUDEM TPP					
			ITEM: EOT CRANES - SINGLE GIRDER CRANE			REV	Rev 00	PACKAGE: Single Girder EOT Crane					
			CAPACITY:			DATE	30.07.15	P.O.NO -					
						PAGE	Page 5 of 5	BHEL NO:					
						CONTRACTOR: BHEL							
S.NO.	Component & Operation	Characteristics	Class	Type of check	Quantum of check	Reference Document	Acceptance Norms	Format of Record	Agency			Remark	
1	2	3	4	5	6	7	8	9	D	M	C	N	11

NOTE1: ** When back wall echo is set to 100% in sound area then,

a) defect echo shall not exceed 20%

b) Back echo shall be minimum 80% in any area

Note 2:- Less than 30 KW, Acceptance of motor less than 30 KW is based on COC of the manufacturer & the contractor confirming as follows : It is hereby confirmed that the above mentioned motor/motors was/were manufactured taking care of customer specific requirement regarding ambient temp, voltage & frequency variation, hot start, pull out torque, starting KVA/KW, temp rise, distance between center of stud and gland plate and tested in accordance with approved drawing/data sheet.

		LEGEND: CLASS A: Critical, B: Major, C: Minor		DOC. NO.:
		** M: MANUFACTURER / SUB-CONTRACTOR D: Records for Data Fold C: CONTRACTOR /NOMINATED INSPECTION AGENCY, ND: NDT LAB N: Customer R: Test / Dim Report, IR-Inspection Report INDICATE "P" PERFORMS, "W" WITNESS, MTC: Mfr's Test Cert. "V" VERIFICATION, ALC: Approved Laboratory Certificate, QCR: Quality Control Report		
MANUFACTURER	CONTRACTOR			NAME & SIGN OF APPROVING AUTHORITY & SEAL
NAME & SIGNATURE				

**TITLE**

**1X800 MW KOTHAGUDEM TPP
SINGLE GIRDER EOT CRANES
CUSTOMER SPECIFICATION**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME: II B

REV 00

Section C2

30.07. 2015

VOLUME - IIB

SECTION – C2

CUSTOMER SPECIFICATION – GENERAL REQUIREMENTS

- 2.13.00 IS : 15560 - Point Hook with Shank up to 160 tones - Specification
- 2.14.00 All electrical installation work shall comply with the provisions of Indian Electricity Act and Indian Electricity Rules as amended upto date.
- 2.15.00 ANSI-830.2.0 - Safety codes for overhead and Gantry Cranes.
- In case of any contradiction between the above mentioned codes and standards (item 2.01.00 thru' 2.14.00 above) and this technical specification, the later will prevail. However, nothing in this specification shall be construed to relieve the Contractor of his responsibility to comply with what is mentioned against item 2.13.00 above.
- 3.00.00 **SCOPE OF WORK**
- 3.01.00 **Scope of work includes supply of the following :**
- 3.01.01 The required no. of E.O.T cranes as indicated in Annexure-I having duty and service conditions as specified hereinafter alongwith all accessories.
- 3.01.02 Runway rails for entire runway length alongwith rail clamps, all inserts, insert plates, anchor bolts, nuts, buffers & stops, limit switches etc. as required.
- 3.01.03 Runway conductors for the entire runway length complete with all insulators, supports, support brackets, fixing clamps, bolts, nuts etc. as specified and as required to complete the installation. Power supply cabling including isolating switch complete alongwith electrical items, attachments and accessories as required to feed power to the runway conductor.
- 3.01.04 All protective devices, anti-collision limit switches etc. as required for the crane.
- 3.01.05 All facilities, accessories and attachments for single ~~and tandem~~ operation of the cranes.
- 3.01.06 Bridge and trolley current collectors and bridge cross conductors alongwith all wirings etc. for the crane as specified and as required to complete the scope of work.
- 3.01.07 Crane components shall be provided with lifting lugs, eye-bolts etc. at suitable locations for handling assembling, lifting and placing into position.
- 4.00.00 **SPECIFIC PERFORMANCE REQUIREMENTS**
- 4.01.00 **Capacity**
- 4.01.01 The safe working load (Y) for E.O.T cranes shall be computed as
- $$Y = 1.10 a$$

4.02.00 **Highest Position**

The highest position reached by the lifting hooks should be such that during operation, the minimum vertical critical clearance between bottom of the equipment being handled and the top of any permanent structure or equipment in the operating area should be at least one metre.

~~4.03.00 **Lowest Position**~~

~~4.03.01 The lifting hooks of the turbine hall cranes should reach upto the ground level (0 m). The auxiliary hooks should reach upto the condenser pit level.~~

~~4.03.02 In case of all other E.O.T. cranes, the lifting hooks should reach upto the floor of its operating area or sump pits as necessary.~~

4.04.00 **Horizontal Clearance**

4.04.01 The lifting hooks in vertical position should reach at least upto 5m from the end stopper in case of turbine hall cranes and upto 2.5m in case of all other cranes.

4.04.02 Either the main or the auxiliary hook in vertical position should reach at least upto 1.5 m from the runway rails in case of turbine hall cranes and upto 1.0 m for all other cranes.

4.05.00 If safe and reliable handling necessitates more operating space for the E.O.T. cranes, the same shall be provided.

5.00.00 **DESIGN & CONSTRUCTION**

5.01.00 **General**

5.01.01 In the design of components on the basis of strength, factor of safety shall not be less than five (5) based on ultimate strength. Impact, fatigue, wear and stress concentration factors shall be taken into account, wherever applicable. Mechanism class shall be as indicated in the Data Specification Sheet.

5.01.02 The crane shall be rigid in construction and all movements shall be smooth and non-jerky. Acceleration for cross travel and long travel motors shall be limited to reasonable values as to preclude any swinging of the load.

5.01.03 Drives shall be designed with adequate margin to give best performance and efficiency. Safety arrangements shall be incorporated to prevent damage to motors on account of mechanical overload and electrical faults and to gearing, shafts, etc. due to over-stressing and other detrimental conditions.

5.01.04 All materials shall be of tested quality and shall conform to the specification requirements and standards mentioned and shall be new and first class in all respects.

- 5.01.05 Castings and forgings shall be of tested quality and shall conform to their respective material specifications and shall be free from flaws and objectionable imperfections, machined true and in a workman like manner.
- 5.01.06 No wood or other combustible material shall be used unless specifically approved by the Owner/Consultant.
- 5.01.07 Proposals for repair or any similar operations involving plugging, welding, boring or addition of metal to the original castings or forgings shall be submitted to the Purchaser and his approval must be obtained before any such work is carried out. Drawing showing details and location of such repairs shall be submitted to the Purchaser.
- 5.01.08 All fabrication by welding shall be carried out by qualified and certified welders as per IS : 1181.
- 5.01.09 Design shall provide for easy maintenance of all parts, particularly the wheel bearings on end-trucks.
- 5.01.10 Temperature Effects
- Where any portion of the structure is not free to expand or contract under variation of temperature, allowance shall be kept for stress resulting from these conditions; the co-efficient of expansion for each degree centigrade variation of temperature above and below normal being taken as 0.000012 for mild steel. The maximum range of variation of temperature shall be as given in the Lead Specification. Cl. 8 of Section II of IS: 800-1962 Code of practice for use of structural steel in General Building construction - shall also apply.
- 5.01.11 Maximum use shall be made of shop fabricated sub-assemblies.
- 5.01.12 Alternative design to those prescribed in specifications will be considered only if found technically suitable and acceptable to the Owner in the light of requirements and accompanied by substantial reduction in cost.
- 5.01.13 Material of Construction
- The material of construction of the major components of the crane shall be as indicated in the Data Specification Sheet. Manufacturers are however free to use alternative material, which are superior for the intended service. But in all cases they are required to obtain prior concurrence of Owner after furnishing chemical and physical properties of the offered material and any other information that may be asked for by the Purchaser.
- 5.01.14 Load Indication
- The crane bridge shall have permanent inscription in English on each side, readily legible from operating floor, stating manufacturer's name, serial no., the year of manufacture and the safe working load.
- 5.02.00 **Structural Design Consideration**

5.02.01 Minimum thickness of metal

For load carrying members the component plates, bars, angles and other rolled sections shall be minimum 8mm thick. For tubes having both ends sealed the minimum thickness shall be 4.9 mm (6 SWG). For unsealed tubes the minimum thickness shall be 8mm. The chequered plates for platforms shall be minimum 6 mm thick over plain.

5.02.02 Accessibility for maintenance

All structural parts shall be designed so that they are accessible for periodic cleaning, brushing and painting. All rivets/bolts shall also be accessible for periodic checking.

5.02.03 Ruling dimensions and ratio

- a) For compression members, the slenderness ratio shall not exceed 120. In case of other load carrying members and subsidiary members the slenderness ratio shall not exceed 180.
- b) For girders, the following values of maximum span to depth ratio shall be governing :
 - Plate girders : Span/depth = 18
 - Lattice girders : Span/depth = 12

5.02.04 Connections

- a) Unless otherwise specified, only rivetted or welded joints shall be used.
- b) Where welding or riveting is not practicable, turned and fitted bolts shall be used, preferably as per IS-1364 and IS-1367.
- c) Minimum number of rivets or turned and fitted bolts in a connection shall not be less than two.
- d) Black bolts shall not be used in main structures and high tensile bolts shall not be used unless approved by the Owner. Bolts shall preferably be not used in tension.
- e) Where bolts pass through sections having tapered flanges, tapered flats shall be welded to inside of the flanges. Tapered washers shall not be used.
- f) Transverse fillet welds on load carrying members shall be avoided. If side fillets are used in end connections, the length of each side fillet should not be less than the edge distance between the fillets.
- g) Butt welds on structural members under tensile stress shall be checked by Radiographic examination as and when directed by the Owner/Consultant.

- h) Splices shall be designed to resist one and half times the forces and moments to which it is subjected, but in no case it shall be less than 2/3rd of the effective strength of the material spliced except that splices in the webs of the plate girders shall be designed for full strength of the web in shear as well as bending. For splicing tension members, the net section of the splice plate shall be ten percent more than that of the material spliced. Splices shall be proportioned and arranged, so that the gravity axis of the splices are in line with the gravity axis of the member to avoid eccentricity.

5.02.05 Deflections and Camber

- a) The total maximum vertical deflection of the girders for the live load plus trolley and not including impact or dead load of the girder shall not exceed limit of Span/900.
- b) The girders shall be cambered by an amount equal to the maximum deflection due to dead load plus one half the live load and trolley.

5.03.00 Bridge Girder and End Carriage

5.03.01 The crane shall have single girder or double girder as required.

5.03.02 The bridge girder shall be box section type or braced I beam type as per standard design of the manufacturer. The exterior surface shall be smooth and as free from projections etc. as possible to minimise dust collection on it.

5.03.03 Single girder cranes shall be provided with suitable truss for supporting the bridge drive machinery and motor.

5.03.04 The crane bridge shall be carried on end trucks of suitable design. Each end truck shall be built up from steel plates welded together to form a closed box section with opening at each end to receive the wheels. Welded to the trucks shall be steel sections to form bearings for the wheel axles and the driving shaft. End trucks shall be provided with rail sweep and bumper. They shall also be provided with suitable jacking pads for maintenance of the wheel and bearings. The location of the jacking pads shall be such that it will not interfere with the maintenance of the wheels and its bearing. Single girder crane will be provided with suitable truss for supporting bridge device machine & motor.

5.03.05 Driving wheels shall be of the double flange and taper tread type and shall be ground to equal diameter in pairs. Wheel axles may be either of the stationary or rotating type as per standard of the manufacturer. If stationary type, they shall be prevented from turning in the truck by means of a key plate fitting into a slot in the end of the axle and if rotating type, wheels shall be keyed to them.

5.03.06 Where more than two bridge wheels are used per end truck, the end truck shall be split into two sections, each carrying one bridge independent of other. Two sections of the end truck shall be joined by suitable joining device that will ensure uniform wheel loading. Steel pads shall be welded on the top of end trucks where the girder rests and shall be machined to receive the girder

ends.

- 5.03.07 Trolley travel rail ends shall be curved upwards to stop the trolley smoothly and prevent it from leaving the rails in case of over travel at its maximum speed.
- 5.03.08 End trucks shall be equipped with spring/rubber buffers and rail sweep for bridge travel. The rail sweep shall be such that it can push away any object that may fall on the runway. The buffers shall be of substantial design and suitable for engaging the stops at the end of runway.
- 5.03.09 Breathing holes shall be provided in completely enclosed welded box type girders. Drain holes shall be provided in all places where water or oil is likely to collect. Where practicable, means of access shall be provided for inside inspection of completely enclosed box girders.
- 5.03.10 In bridge girder strength calculations, the trolley rails and chequered plates shall not be considered as load carrying members.

5.04.00 Trolley Frame

- 5.04.01 The trolley frame shall be built up from heavy steel plates, angles and channels adequately braced to resist vertical, lateral and torsional strains, welded to form a rigid one piece frame. Alternatively, it may be of cast steel construction.

On bottom of trolley frame, on each side shall be a double spring bumper to engage stops at each end of the bridge.

- 5.04.02 Equaliser sheaves shall be mounted on the trolley frame in such a manner that deflection resulting from the force on the sheaves are not directly transmitted to the hoisting mechanism.
- 5.04.03 Sheaves shall be so arranged on the trolley that rope reeving arrangement resulting therefrom will ensure a lifting of the load in almost a vertical line with minimum of swing or side-movement.

5.05.00 Platforms and Ladders

- 5.05.01 Safe means of access shall be provided to the operator's cab and to every place where any person engaged in the examination or maintenance of the crane has to work. Adequate handholds and footholds shall be provided as necessary.
- 5.05.02 One metre high double tier handrail and suitable toe-boards shall be provided along the entire length of platform (on the bridge), which shall not be less than 750 mm wide. One platform for full span length on each side of the crane girder.
- 5.05.03 Every platforms shall be provided with steel chequered plate top and be securely fenced with one metre high double tier hand rails and toe boards. Platforms shall be of sufficient width to enable normal maintenance work to be undertaken safely.

- 5.05.04 ~~In case lattice riveted construction is offered for the bridge girder, full length chequered plate platform with adequate headroom shall also be provided at bottom chord level for periodic checking of all rivets/bolts and other items.~~
- 5.05.05 ~~Access to operator's cabin from bridge girder platform shall be by staircase having adequate width and proper sloping~~
- 5.06.00 **Operation**
- The crane shall be operated ~~either from cabin in the crane bridge or~~ from a pendant control station as specified in Data Specification Sheet.
- 5.06.01 Operator's Cabin
- a) ~~The operator's cabin shall be closed type, suitable for indoor service & complete with light, air-conditioning & seat. The cabin shall be located on one end of the crane bridge and under one of the bridge girders, so that it is offset to one side. The cabin shall be provided with guarding hand rails and the floor shall be covered with electric insulating carpet. A clear headroom of 2000 mm shall be ensured within the cabin.~~
 - b) ~~A foot operated type warning gong shall be provided within the cabin. The cabin shall be of ample size to contain controllers, protective pannel, main isolating switch and other accessories required for operating the crane. A ten (10) lbs. capacity portable CO₂ fire extinguisher shall be provided in the cabin.~~
 - c) ~~Provision shall be there for emergency exit of the Crane Operator at three convenient positions in case of power failure.~~
- 5.06.02 Pendant Station
- a) The pendant station shall have the push buttons for controlling the various motions of the crane and shall be hung from the crane trolley to a height of approximately 1 metre above the operating floor.
 - b) With pendant operation, foot operated bridge travel brake and the drum controllers need not be provided.
- 5.07.00 **Repair Cage**
- 5.07.01 A repair cage shall be provided on the inside of the end carriage for attending the main current collectors. In case, the trolley current collectors are located below trolley rail level on the inside webs of the bridge girders, guards shall be provided on the trolley to prevent the hoisting ropes from coming in contact with conductors as well as a repair cage shall be provided on the trolley to attend these conductors.
- 5.07.02 Repair cages shall also be provided at the corners of the crane, if required, to facilitate removal and replacement of long travel wheels.
- 5.07.03 The repair cages shall be adequately sized, guarded for safety and correctly

located for the intended service. Suitable access to the cages shall be provided.

5.08.00 Lifting Hook Block Assembly

The lifting hook block assembly shall be ramshorn type or approved equal for capacity greater than 40 Tonnes and point hook with shank for capacity below 40 Tonnes and shall be of steel construction. Each hook shall be supported on ball or roller thrust bearing and shall rotate freely on its bearings. Safety latch shall be provided in the hook.

The sheaves of the hook block shall be encased in an oil tight casing permitting generous lubrication of wire ropes and sheaves and also preventing accidental tapping of hands. Sheave pulley block shall be provided with ball/roller bearings.

All sharp edges on the hooks shall be eliminated to prevent damage to the sling ropes. The hooks shall conform to the requirements of IS: 3177.

5.09.00 Gearing

5.09.01 Gears in the speed reducer unit for bridge drive and also all hoists and trolley drive gearing shall be enclosed in substantial housing and shall operate in oil bath. The oil shall have additives of approved quality and shall be of approved viscosity at standard temperature (say 60°C). The housing shall be of sufficient design not to permit a temperature in excess of 90°C for the oil bath and shall be adequately supported and readily removable without disturbing the gear assembly.

5.09.02 Gears shall be of cast or forged steel and pinions shall be forged steel and shall be machine cut. Gear and pinion teeth shall be treated for resistance to wear.

5.09.03 Gears shall have tooth form and modules as recommended in IS-3681 and they shall be adequately designed to stand shock load and vibration and shall not be excessively noisy in operation. The ratings of gears shall be established as per IS : 4460.

5.09.04 Spur and helical gears only shall be used for reduction gearing.

5.09.05 Mounting of the gears shall be such that axial thrust on the bearing is minimum. Centre distance of the connecting shafts shall be as close as possible to the theoretical value. Shafts shall be designed to keep their deflections within permissible limits.

5.10.00 Bearing

5.10.01 The type of bearings for various parts shall be as per IS-3177 and standard of manufacturer.

5.10.02 Provision shall be made for service lubrication of all bearings. Bearing enclosures shall be designed as far as practicable to exclude dirt and prevent leakage of oil or grease. Arrangement for centralised lubrication of bearings

shall be tried to the maximum extent possible and a detailed scheme for the same shall be furnished alongwith the tender.

5.10.03 Suitable drip pans shall be provided as required to collect oil and grease which may drop from operating parts. All drip pans shall be accessible for draining and cleaning.

5.10.04 All bearings of the gearing shall be antifriction type. Angular contact ball or taper roller bearings shall be used wherever necessary. The bearings shall correctly locate the shafts while allowing for thermal expansion of the shafts. Bearings shall be enclosed in suitable housing with proper holes and plugs to prevent any ingress of dirt and to permit easy lubrication of the bearings.

5.11.00 Guarding

5.11.01 Guards of an approved design, which will push forward or off the rail track any object placed across it, such as person's foot or arm, shall be attached to each end of the end carriage.

5.11.02 Protection guards to live electrical wirings/conductors shall be provided.

5.11.03 Suitable guards to revolving shafts and coupling, long travel cross shafts and gears, shall be provided.

5.11.04 The sheaves of the hook block fitted with two sheaves or fewer shall be guarded to prevent tapping of a hand between a sheave & the running rope.

5.11.05 Effective means of guiding the wire ropes over the sheaves shall be provided so as to prevent dismounting of rope from the sheave grooves even when a slack rope condition is developed.

5.11.06 All openings in footwalk flooring, for access to bottom chord platform, if any, and to other inspection platforms, shall be provided with covers having suitable locking means to avoid any accidental opening.

5.11.07 All electrical panels, resistance boxes shall have suitable rain/ dust hoods over them to prevent water and building construction material falling on them, as it is apprehended that erection and commissioning of the crane might have to be taken up before completion of the building roof.

5.12.00 Runway Rails

5.12.01 Crane runway rails with bolts and nuts and complete with shims, anchor bolts, inserts and other fixtures for fixing the rails to crane girders shall be under the scope of supply of the present specification.

5.12.02 The length of the rail supplied shall be sufficient to cover the whole of runway length. Gap between successive rails shall not exceed 2 mm and end rails shall be provided with stoppers to prevent longitudinal shifting.

5.12.03 The rail section shall be as per IS: 3443.

5.13.00 Trolley Rail

DEVELOPMENT CONSULTANTS

V.IIIF/S-II : 11

(e-PCT-TS-K-02-2014-15e-PCT-TS-K-02-2014-15-Vol IIIF-Sec-2)

- 5.13.01 The specification includes the supply of trolley travel rails complete with fixtures for fixing the rails to the body of crane.
- 5.13.02 The length of the rail supplied shall be adequate for maximum permissible trolley travel. Gap between successive rails shall not exceed 2 mm and end rails shall be provided with stoppers to prevent longitudinal shifting.
- 5.14.00 **Rail Joints and Fixing**
- 5.14.01 The rails shall be butt jointed by either thermit welding or fusion welding process. The Contractor shall get his proposal for edge-preparation of rails, welding procedure and sequence, approved in advance by the Purchaser/Consultant.
- 5.14.02 The schemes of securing the rails to the gantry girder/bridge structure with clamps, bolts and nuts, their alignment etc. shall be subject to the approval of the Purchaser/Consultant.
- 5.15.00 **Tolerances**
- The limits of tolerance as specified in the Data Specification Sheet shall be observed.
- 5.16.00 **Rail End Stops**
- Rail end stops of adequate design shall be provided on both ends of the runway. The end stop location and arrangement shall be such that the unavailable length of runway (for crane operation) on any end is a minimum.
- 5.17.00 **Drive Mechanism**
- 5.17.01 Equal driving effort shall be applied at each drive wheel of bridge and trolley to prevent one end from travelling faster than the other.
- 5.17.02 For bridge, the torsional deflection in the cross shaft shall be limited to safe value as per applicable code.
- 5.17.03 For bridge drive, the motor shall be located at mid position of the span. If twin motors are used for drive, motors shall be equidistantly located at each wheel end. Suitable interlock shall be provided to prevent single motor operation at any time.
- 5.17.04 Trolley drive shall be achieved by single motor in which the motor shall drive a common output shaft through proper gearbox and tractive power shall be transmitted to the geared wheels by means of pinions mounted on both ends of the output shaft.
- 5.17.05 All machineries for the drive unit shall be properly aligned. Self-aligning type gear couplings shall be used between connection shafts to take care of transverse as well as axial movement wherever necessary. Wherever components of considerable amount of inertia is directly mounted on the high speed shaft(e.g. brake drum, couplings, etc.) they shall be balanced statically

to minimise vibration.

5.17.06 Motor ratings shall be calculated keeping margin of at least 15% over the maximum power requirement. Further, the hoist motors shall be rated to lift 110% of the design load on the hook at the rated speed. For other details the clause no. : 5.19.00 below shall be referred to.

5.17.07 Along with the drive mechanisms adequate brakes shall be provided as detailed in clause no. : 5.20.00 below. Selection and design of brakes shall be complete responsibility of the manufacturer. The brakes shall be of accurate rating to stop each motion within a very short distance and in a safe and smooth manner.

5.18.00 Crane Electricals

5.18.01 The crane(s) shall be furnished complete with all electrical equipment, accessories (like drive motors with VVVF Drives, conductors, insulators, protective & operating devices, cables, current collectors, main disconnecting switch, Illumination etc.) and cabling/wiring as may be necessary for the efficient and safe operation of the crane.

5.18.02 The crane electricals shall be designed for satisfactory operation from the available power supply as given in the Data Specification Sheet.

5.18.03 All electrical equipment, accessories and wiring shall have tropical protection involving special treatment of insulation and metal against fungus, insects and corrosion.

5.18.04 All electrical equipment shall be laid out so that they are readily accessible for inspection and maintenance.

5.18.05 All electrical equipment, accessories and wiring shall have tropical protection involving special treatment of insulation and metal against fungus, insects and corrosion. All cabling shall be carried out using XLPE insulated fire resistant (FRLS) cables & wiring by Heat resistance PVC wires with stranded conductors.

5.18.06 All electrical equipment shall be laid out so that they are readily accessible for inspection and maintenance.

5.18.07 The hoist structures, motor frames & metal comes of all electrical equipment on EOT crane/hoist shall be effectively grounded as per Indian Electricity Rules.

5.18.08 If the pendent control is of metal, it shall be earthed.

5.18.09 All equipment offered shall have suitable provisions for termination and connection of power and control cable inclusive of cable end box, brass compression glands terminal lugs and terminals. Incoming switch-fuse shall be provided at each panel for incoming AC/DC power supplies.

5.19.00 Drive Motors

5.19.01 For general technical requirements of motors refer to Volume-V, AC & DC

DEVELOPMENT CONSULTANTS

V.IIIF/S-II : 13

(e-PCT-TS-K-02-2014-15e-PCT-TS-K-02-2014-15-Vol IIIF-Sec-2)

Motors..

5.19.02 Motors shall be slip ring wound rotor type, designed for crane duty requirement of frequent starting. Reversing and plugging motors of single girder EOT crane shall also be squirrel cage type. All motors shall be suitable for VVVF operation.

5.19.03 Motors shall suit the duty class S4.

5.20.00 **Brakes**

Selection and design of brakes shall be such as to meet the following requirements

5.20.01 **Service Brake**

- a) Double-shoe type service brakes shall be provided for each motion of the crane and its hoists. The service brakes shall apply automatically when power supply to the drive motor is cut-off or fails.
- b) Service brakes for main hoist motion shall be electro- hydraulic thruster type for all double girder cranes either cabin or pendant operated and electromagnetic disc. type for single girder crane; adequately sized to arrest motion and hold at rest any load upto and including test load at any position of the lift.

5.20.02 **Hoist Control Braking Means**

Hoist motion (both main and auxiliary) shall be provided with a self-contained sturdy braking system, electro- hydraulic thruster type, to control the speed of hoisting as well as lowering down to 10% rated speed. The braking system shall be reasonably uniform and effective with all loads (from no-load to full-load) on hooks.

5.21.00 **Main Disconnect Switch**

5.21.01 Main disconnect switch shall be metal-clad, 3-pole, load-break type in IP-54 enclosure, complete with compression brass glands and lugs.

5.21.02 The switch shall be provided with "Power On" red indication lamp (Clustered LED type) and shall be suitably located so that it can be manually operated from the operating floor level.

5.21.03 Power leads shall run from the main disconnect switch to the runway conductors.

5.22.00 **Runway Conductors (Down Shop Leads)**

5.22.01 The runway conductors shall be four (4) in number for three phase supply and ground.

5.22.02 The runway conductors shall be of M.S.angle sections, liberally sized so as not to exceed current density of 0.42 Amps/sq.mm. However, for small

- capacity cranes having lower spans i.e. compressor house crane, flexible copper cable will be used.
- 5.22.03 Sufficient allowance (minimum 20%) for wear and tear shall be provided over the calculated conductor size.
- 5.22.04 The runway conductors shall be supported on brackets and insulators from the crane girder with sufficient spacing in between the conductors.
- 5.22.05 The collector system per conductor shall be top-running type having spring loaded cast iron/carbon metallic shoes to maintain adequate contact pressure.
- 5.23.00 **Cross-Conductors on Bridge**
- 5.23.01 Cross conductors on bridge shall be flexible trailing cable system mounted on retracting supports (festoon type).
- 5.23.02 Alternatively cross conductors of M.S. angles with shoe collectors, similar to the arrangement of runway conductors may be offered.
- 5.24.00 **Power Distribution Equipment**
- 5.24.01 From the main collector shoes, wiring shall be extended to two (2) nos., 3-pole, load-break, safety disconnect switches -one at the bridge near the collector and the other in operator's cabin within easy reach.
- 5.24.02 The safety switches shall be capable of cutting-off the supply to all power driven and associated equipment of the crane but not the auxiliary loads such as fans, lights etc.
- 5.24.03 From the safety disconnect switches, wiring shall be extended to a protective panel, containing the following as a minimum :
- a) One triple pole incoming supply disconnect switch.
 - b) One triple pole main magnetic contactor with HRC fuse backup, ON-OFF push buttons and RED-GREEN indication lamps (LED type).
 - c) Motor feeders, each comprising of triple pole fuse switch unit with thermal overload (hand reset) relays for short circuit and over load protection in all three phases of the motor.
 - d) Outgoing feeders with double-pole switch fuse units for auxiliary loads such as control supply, lights, fans, etc. with atleast one spare feeder.
- 5.25.00 **Voltage Drop**
- 5.25.01 All conductors and cables/wires shall be so sized that the voltage drop measured between the main disconnect switch and motor terminals shall not exceed 3% of rated voltage.
- 5.25.02 The voltage drop shall be computed using the total running current of all

crane motors that can operate simultaneously and with rated crane load.

5.26.00 Safety Interlocks

5.26.01 Disconnect Switch

- a) The operating handle of the main/ safety disconnect switch shall be mechanically interlocked with enclosure cover such that the same can not be opened unless the switch is in OFF position.
- b) Main/ safety disconnect switch shall have provision of pad-locking in OFF position.

5.26.02 Main Contactors

- a) The main contactor shall be electrically interlocked so that it can not close unless all the motor overload relays are RESET and all controllers are in OFF position.
- b) The main contactor shall be also opened by means of emergency push buttons and hoist limit switches.

5.27.00 Emergency Switch

Mushroom type emergency STOP push buttons to open the main contactor shall be furnished - at least one in operator's cabin and two on bridge platform within easy reach.

5.28.00 Crane Controls

Fully magnetic control shall be furnished complete with master controller (applicable for cab operated cranes only and not for pendant controlled cranes) for each motion, complete with contactors, time lag relays, plugging protections, resistors and other accessories to meet the following control requirement :

5.28.01 Hoist Motions (both main and auxiliary)

- a) VVFC or Conventional rotor resistance control shall be used in both hoisting and lowering directions, with a minimum of five (5) speed steps in each direction.
- b) Hoist control shall be designed to achieve "Inching Speed" of 10% the rated speed in both hoisting and lowering directions with loads (no-load to full-load) on hook.

5.28.02 Travel Motions (both bridge and trolley)

~~Conventional rotor resistance control shall be used in both forward and reverse directions, with a minimum of four (4) speed steps in each direction.~~

~~However, the clause no. 5.28.01 & 5.28.02 is applicable for all cabin operated cranes. For double girder cranes having slip ring hoist, CT & LT motors, the~~

~~speed steps are basically occurring during starting. In normal operation, there are no speed steps in between rated speed & micro speed in hoist motion and no speed steps in CT/LT motion. For single girder cranes, there are no speed steps in CT/LT motion and no speed steps between rated speed and micro speed in hoist motion.~~

5.28.03 **General**

- a) All controls shall be designed to be fail-safe on loss of power.
- b) Control circuits shall be suitable for 240V 1ph 50Hz supply and complete with suitable dry type control transformer with isolation facility and primary/secondary fuses.
- c) Individual control/resistor panel shall be furnished for each motion for ease of inspection and maintenance.

5.29.00 **Controllers**

5.29.01 Master controllers for all motions shall be so arranged in the operator's cabin as to provide maximum convenience and view of the operator.

5.29.02 All controllers shall be provided with spring return to OFF position feature. When in OFF position, the controller shall disconnect power supply to the respective motor.

5.29.03 Each controller shall bear suitably engraved inscription of motions controlled in English & Hindi and of direction of motions by arrows.

5.30.00 **Resistors**

5.30.01 The resistors shall be heavy duty, punch-grid type of stainless steel. Resistors shall be rated for 10 minutes and the maximum temperature at any time shall not exceed 250°C.

The resistor grids shall be housed in expanded metal enclosures IP-23 and shall be so mounted as to prevent vibration. Sufficient space shall be provided around the resistors to ensure adequate cooling air flow. Adequate weatherproof protection shall be provided for resistor enclosure.

5.31.00 **Limit Switches**

5.31.01 The limit switches shall be totally enclosed type IP-55 with properly designed actuators and shall be readily accessible for adjustment and repair.

5.31.02 Each hoist shall be furnished with two (2) limit switches :

- a) A screw type limit switch with self resetting features which will act in case of overhoisting.
- b) A gravity operated hand-reset type limit switch as a back-up protection against over-hoisting.

- 5.31.03 Track type limit switches shall be provided on the bridge and trolley to prevent overtravelling in either directions.
- 5.32.00 **Panels**
- 5.32.01 All protection and control panels required for Cranes shall meet the technical requirements of "Electrical Equipment & Accessories, Volume-V".
- 5.33.00 **Illumination**
- 5.33.01 Crane lighting and space heating systems shall be designed for 240V 1ph 50 Hz supply and receptacle system 24V 1ph 50 Hz supply. Suitable dry type transformers (2x100%) shall be furnished for the purpose, complete with isolation facility and primary/secondary protection using Moulded Case Circuit Breaker (MCCB).
- 5.33.02 The lighting distribution board shall be located in the operator's cabin. Branch circuits for lighting and receptacles shall be individually protected by switch fuse units.
- 5.33.03 CFL fixtures shall be used for lighting operator's cabin and bridge platform. Four (4) 250W high-bay sodium vapour fixtures shall be provided below bridge for illumination of the working zones.
- 5.33.04 All lighting fixtures shall be mounted with anti-vibration mounting and shall be easily accessible for maintenance.
- 5.33.05 24V - 5A - 3 pin industrial socket outlets shall be provided – two (2) in operator's cabin and minimum four (4) on the bridge along the walkway.
- 5.33.06 One (1) portable 40W handlamp with plug shall be furnished with adequate length of flexible cable for inspection of crane components.
- 5.33.07 Operator's cabin shall be provided with one (1) electric fan.
- 5.33.08 One (1) heavy duty type industrial siren shall be provided with each crane. The siren shall be operated from foot-switch in the operator's cabin.
- 5.33.09 Conduit wiring system shall be used for lighting circuits.
- 5.34.00 **Wiring**
- 5.34.01 All power, control and auxiliary circuit wiring shall be furnished and installed as per best installation practice. The design shall be such as to maximise shop wiring and minimise field wiring.
- 5.34.02 All wiring shall be done with 1100V grade fire resistance PVC insulated wire in conduits or by 1100V grade PVCA PVC cables with extruded inner sheath.
- 5.34.03 Conductors shall be stranded aluminium for power and stranded copper for control. Minimum conductor size shall be not less than 2.5 sq.mm copper or equivalent.

- 5.34.04 Conduits shall be heavy gauge, rigid steel, hot-dip galvanised, cut square, reamed, threaded and screwed tight at all joints. Conduit entry to pull box or enclosure shall have double locknuts and insulating bushing. No running thread shall be used.
- 5.34.05 Solderless connectors shall be used for all connections. No splices shall be permitted in wire or cable. No taps or connections shall be made in fittings or junction boxes.
- 5.34.06 All wires and cables shall be identified with permanent markers at terminations as per approved wiring diagram.
- 5.35.00 **Grounding**
- 5.35.01 The crane rails, structures, motor frames, metal enclosures of all electrical equipment, conduit and tray system shall be effectively grounded in accordance with Indian Electricity Rules.
- 5.35.02 Bonding of structures and crane rails shall be provided as required to ensure electrical continuity.
- 5.35.03 The crane grounding system shall be connected to station ground mat. For this purpose, the Purchaser will provide ground conductor (50 x 6mm M.S. flat) at two agreed locations.
- 6.00.00 **INSPECTION AND TESTING**
- 6.01.00 **Tests at shop**
- 6.01.01 The cranes shall be subject to full load and overload tests as per IS-3177. after complete assembly and wiring. In case of non availability of facilities for carrying out "full load and over load testing" no load testing of the crane in fully assembled condition may be carried out after obtaining consent from owner.
- 6.01.02 The crane shall be subject to deflection test as per IS : 3177.
- 6.01.03 If the hoisting drum offered is of welded construction. The seams shall be fully radiographed.
- 6.01.04 The inspection and testing of butt welded joints shall be performed in accordance with the provisions of the relevant Indian Standards or equivalent standard. Butt welded joints subject to direct tension shall be 100% radiographed. All 'T' joints shall be covered with spot radiography. Should any of the spots be found defective then radiography to be extended to 100% area.
- 6.01.05 All electrical equipment and components thereof shall be subject to routine tests as per relevant Indian Standards. Type test certificate on any electrical equipment shall be submitted if desired by the Purchaser. Otherwise, type tests shall have to be performed on the equipment to prove the design.

- 6.01.06 Reports of all shop tests shall be submitted to the Purchaser/ Consulting Engineer for review.
- 6.02.00 **Tests at site**
- 6.02.01 After assembly and erection at site, the crane shall be subject to the following tests :
- a) All tests as per IS-3177, including insulation test and tests for operation.
 - b) Deflection tests as per IS-3177
 - c) Overload tests at 125% of working load as per IS-3177
- 6.02.02 Dead loads as required for conducting the tests at site shall have to be arranged by the Contractor at his own cost.
- 6.03.00 **Erection and Commissioning**
- All cranes shall be erected and commissioned after satisfactory shop & site test.
- 7.00.00 **DRAWINGS, DATA AND INFORMATION**
- 7.01.00 The following drawings and data are required with the proposal.
- 7.01.01 Crane clearance diagram filling in the various dimensions.
- 7.01.02 General Arrangement Drawings of the E.O.T. crane assembly.
- 7.01.03 Detail drawing showing the features of the components of the crane bridge and trolley.
- 7.01.04 Drawings and data on the crane runway rail, and its method of attachment to runway main girder and general arrangement of runway rail end stops.
- 7.01.05 Schematic drawings of hoisting mechanism, cross travel mechanism and long travel mechanism indicating all components as well as rope receiving arrangement and relative positions of equaliser sheaves.
- 7.01.06 A detailed write-up on the crane control system operation including tandem operation. Drawings and data sheets showing the particulars of the controllers, switches, contactors, relays, other control devices and limit switches.
- 7.01.07 A comprehensive write-up and/or Brochures on the details of the manufacturing facilities and the test facilities in the shop of the supplier.
- 7.01.08 For Mandatory Spares, Spares required for erection and commissioning, Recommended Spares, Special Tools and Tackle, fixtures etc., as required for regular operation and maintenance of the equipment offered and supply of

- first charge of lubricating oil, inhibitor oil and also adequate quantity of the consumables, please refer Technical Specification Volume-II A.
- 7.01.09 Other relevant data and particulars.
- 7.02.00 The following drawings and data shall be submitted for review of Owner/ Consulting Engineers by the successful bidder.
- 7.02.01 Drawings showing general arrangement, clearance requirement, assembly, cross sectional data and materials of construction for :
- a) E.O.T. Crane Unit
 - b) Bridge Assembly and Components
 - c) Bridge End Trucks and Wheel Assembly
 - d) Trolley
 - e) Trolley Wheel Assembly
 - f) Drive and Transmission Unit for Bridge Travel, Trolley Travel, Main Hoist and Auxiliary Hoist.
 - g) Suspension Unit for Main Hook Block and Auxiliary Hook Block.
 - h) Main Hook Block
 - i) Auxiliary Hook Block
- 7.02.02 Drawing showing layout of controllers and protective panels inside the operator's cabin/pendant station.
- 7.02.03 Leaflets on proprietary items such as motors, brakes, gear box, coupling etc.
- 7.02.04 Design calculation of the following :
- Bridge girder, Rope drum, Machinery shafts, Gear box, Motor rating, Brake capacity, Bearing life, Wheel loading etc.
- 7.02.05 Drawings, characteristics curves and other data for each drive motor.
- 7.02.06 Drawings on runway rails and their end stops showing fixtures to fix them on Purchaser's runway girder.
- 7.02.07 Material test certificates for all items including hooks and wire rope.
- 7.02.08 Reports on various tests at shop and at site.
- 7.02.09 Control and protection scheme along with crane wiring drawing as well as a schematic drawing of control wiring indicating ratings and specifications for motors, contactors, resistors, fuses, etc.

7.02.10 As built drawing/electrical control schematic including tandem operation features of turbine hall cranes.

7.03.00 Instruction Manual

7.03.01 The Instruction manuals shall present the following basic categories of information in a comprehensive manner prepared for use by operating and/or maintenance personnel :

- i) Instruction for erection
- ii) Instruction for pre-commissioning check up, operation, abnormal conditions, maintenance, repair and protection.
- iii) A detail write up on the crane control system including tandem operation for turbine hall cranes and also on the interlocks provided.
- iv) Recommended inspection points and periods of inspection.
- v) Schedule of preventive maintenance.
- vi) Replaceable part's list with ordering information.
- vii) Recommendation for type of lubricants, lubricating points, frequency of lubrication and lubricant changing schedule.

ANNEXURE-II

DATA SPECIFICATION SHEET

GENERAL INFORMATION

Location : As per Annexure I.

Working condition : Indoor

GUARANTEED PERFORMANCE REQUIRED

Capacity :

(Safe working load)

a) Main Hoist (T) 125T (minimum) Final capacity to be decided by bidder

b) Aux. Hoist (T) 25T (minimum) Final capacity to be decided by bidder

Above capacity mentioned for Turbine Hall EOT cranes only. However, other cranes capacity shall be decided by bidder.

** Safe working load shall be 110% of weight of the heaviest equipment to be lifted.

Rated Speed (Turbine Hall) : (for any load from zero to SWL)

Main hoist 1 m/min.

Aux. hoist 3 m/min.

Trolley travel 10 m/min.

Bridge travel 15 m/min.

Range of speed control for main and auxiliary hoist and for each motions (for any load from zero to SWL) Down to 10% of corresponding rated speed.

Rated Speed (Other than Turbine Hall) : (for any load from zero to SWL)

Main hoist 3 m/min

Aux. hoist NA

DEVELOPMENT CONSULTANTS

(e-PCT-TS-K-02-2014-15e-PCT-TS-K-02-2014-15-Vol IIIF-Sec-2)

V.IIIF/S-II : 24

Trolley travel	10 m/min
Bridge travel	15 m/min

GUARANTEED PERFORMANCE REQUIRED (Contd.)

Range of speed control
for main and auxiliary
hoist and for each motions
(for any load from
zero to SWL) :Down to 10% of
corresponding
rated speed.

SCOPE OF SUPPLY

Crane structures complete	:	Yes
All drive motors and driving gears	:	Yes
Running rails including all clamps, anchors, bolts, nuts, sheams, inserts, end stops and other fixtures	:	Yes
Operator's Cabin	:	Yes, For Turbine Hall crane
Pendant Station	:	Yes, For other cranes
Portable fire extinguisher/CO₂ bottle in operator's cabin	:	Yes
Runway conductors (d.s.l.) and power collectors complete with all supports, insulators, brackets, fixtures etc.	:	Yes
Complete electrical work including main disconnect switch, all controls and interlocks, with necessary wiring, grounding, protective panels etc.	:	Yes
Lower limit switches for hoists	:	Yes
Illumination of crane, operator's cabin etc.	:	Yes
Air Conditioning in operator's cabin	:	Yes
Lifting lugs, eye bolts etc. for handling of crane parts	:	Yes
Erection and commissioning service	:	Yes
All equipment, accessories and		

DEVELOPMENT CONSULTANTS

V.IIIF/S-II : 25

(e-PCT-TS-K-02-2014-15e-PCT-TS-K-02-2014-15-Vol IIIF-Sec-2)

consumables required for erection,
testing and commissioning : Yes

Final painting : Yes

First charge of oil, lubricants, grease etc. : Yes

DESIGN AND CONSTRUCTION

Duty Class : Mechanism class - M-5 as per IS-3177 and IS-807
(Turbine Hall) Electrical Service class - 4 as per IS-3177

Duty Class : Mechanism class - M5 as per IS-3177 and IS-807
(Other than Turbine Hall)

Operation : ~~Cabin for Turbine Hall~~
Pendant station for others.

No. of Trolleys : One

Span between runway rail centres : }

Net runway length : }

Elevation of top of runway rails : } To be decided by the bidder.

Elevation of bottom of building
roof structures : }

Main hook positions -

a) Elevation - Highest : }

- Lowest : }

b) Minimum approach from runway
rail centre lines : }

c) Minimum end approach from
runway rail stops : }

Auxiliary hook positions - } To be decided by the bidder.

a) Elevation - Highest : }

- Lowest : }

b) Min. approach from runway rail
centre lines : }

c) Min. approach from runway
rail stops : }

Clear space between runway rail }

DEVELOPMENT CONSULTANTS

V.IIIF/S-II : 26

(e-PCT-TS-K-02-2014-15e-PCT-TS-K-02-2014-15-Vol IIIF-Sec-2)

DESIGN AND CONSTRUCTION

Runway conductors -

- | | | |
|--------------------------------------|---|----------------------|
| a) Material | : | As specified earlier |
| b) Maximum allowable current density | : | Bidder to indicate |

End Truck

- | | | |
|-------------------------------------|---|----|
| a) I-Section acceptable | : | No |
| b) Single flanged wheels acceptable | : | No |

Permissible tolerance -

- | | | |
|---|---|--------------|
| a) Difference in levels of crane rail top measured between two adjacent columns | : | 2.0 mm |
| b) Crane rail gauge | : | $\pm$ 3.0 mm |
| c) Relative shift of ends of adjacent rails in plan and elevation after welding | : | 1.0 mm |
| d) Deviation of crane rail axis from centre line of web of supporting girder | : | $\pm$ 3.0 mm |

Schedule of Brakes

Holding torque for control brakes shall be 150% of rated torque and that of service brake shall be 125%. The schedule of brakes shall be as under:

Sl. No.	Service	Type & No. (Turbine Hall)
1.	Main Hoist	Two (2) nos. Electro-hydraulic thruster type brake.
2.	Auxiliary Hoist	Two (2) nos. Electro-hydraulic thruster type brake.
3.	Cross Traverse	Two (2) nos. Electro-hydraulic thruster type brake.
4.	Long Traverse	Two (2) nos. Electro-hydraulic thruster type brake.
		Two (2) nos. Hydraulic thruster (foot operated)
5.	Main Hoist (creep)	One (1) no. Electro-hydraulic thruster type brake.
6.	Auxiliary Hoist (creep)	One (1) nos. Electro-hydraulic thruster type brake.

Sl. No.	Service	Type & No. (Other than Turbine Hall)
1.	Main Hoist	Two (2) nos. (1DCEM + 1EHT brakes)
2.	Auxiliary Hoist	N.A.
3.	Cross Traverse	One (1) no. Electro-hydraulic thruster type brake.
4.	Long Traverse	One (1) no. Electro-hydraulic thruster type brake.
5.	Main Hoist (creep)	One (1) no. Electro-hydraulic thruster type brake.
6.	Auxiliary Hoist (creep)	N.A.

The aforesaid brake schedule is applicable for double girder either cabin or pendent operated crane. For single girder cranes and single girder under slung cranes, one (1) electromagnetic disc brake for each motion shall be provided.

MATERIAL OF CONSTRUCTION

Bridge girder	:	IS-2062
Other structural members	:	IS-2062
Lifting hooks	:	As per IS-15560 (For Turbine Hall) As per IS-8610 (Other than Turbine Hall)

VOLUME : IIA

SECTION-IV

GENERAL TECHNICAL REQUIREMENTS (As Applicable)

1.00.00 CODES AND STANDARDS

1.01.00 Except where otherwise specified, the Plant shall comply with the appropriate Indian Standard or an agreed internationally accepted Standard Specification as listed in the annexure to this Section and mentioned in detailed specifications, each incorporating the latest revisions at the time of tendering. Where no internationally accepted standard is applicable, the Bidder shall give all particulars and details as necessary; to enable the Owner to identify all of the Plant in the same detail as would be possible had there been a Standard Specification.

1.02.00 Where the Bidder proposes alternative codes or standards he shall include in his tender one copy (in English) of each Standard Specification to which materials offered shall comply. In such case, the adopted alternative standard shall be equivalent or superior to the standards mentioned in the specification.

1.03.00 The plant will be designed in compliance with applicable National and International Codes and Standards such as ASME, ASTM, DIN, BS, IEC, IEEE, IS, etc. Wherever specified or required the Plant shall conform to various statutory regulations such as Indian Boiler Regulations, Indian Explosives Act, Indian Factories Act, Indian Electricity Act, Environmental Regulations, etc. Wherever required, approval for the plant supplied under the specification from statutory authorities shall be the responsibility of the Contractor.

1.04.00 In the event of any conflict between the codes and standards referred above, and the requirements of this specification, the requirements, which are more stringent, shall govern.

1.05.00 In case of any change of code, standards and regulations between the date of purchase order and the date the Contractor proceeds with manufacturing the Owner shall have the option to incorporate the changed requirements. It shall be the responsibility of the Contractor to advise Owner of the resulting effect.

1.06.00 Successful Bidder to furnish two (2) sets of latest of national/inter-national codes and standards to owner.

2.00.00 RESPONSIBILITY FOR DESIGN

2.01.00 The Contractor shall assume full responsibility for the design of the whole and every portion of the Plant, whether or not the design work was undertaken specifically in relation to the Contract and whether or not the Contractor was directly involved in the design work.

- 2.02.00 Notwithstanding the Owner's wish to receive the benefits of new, advanced and improved technologies, a prime requirement is that all the systems and components proposed shall have been already adequately developed and shall have demonstrated good reliability under similar, or more arduous conditions elsewhere, at least for continuous 2 years in two different power station.
- 2.03.00 The successful bidder shall have to carry out surge analysis, BFP transient analysis and other transient condition studies as may be necessary and as required by the Owner as per proven engineering practice.
- 2.04.00 The Bid shall include a detailed discussion on the development status of, and the reasons for any changes made in proposed systems or components for the Plant, as compared with similar items previously supplied in other installations cited by the bidder as reference plants.
- 2.05.00 The Bidder may also make alternate offers, provided such offers are superior in his opinion in which case adequate technical information, operating feed back, etc. are to be enclosed with the offer, to enable the Owner to assess the superiority and reliability of the alternatives offered. In case of each alternative offer, its implications on the performance, guaranteed efficiency, auxiliary power consumptions, etc. shall be clearly brought out to the Owner to make an overall assessment. In any case, the base offer shall necessarily be in line with the specifications i.e. Base offer shall be as per the technical specifications and the same will be considered for techno-commercial evaluation.
- 3.00.00 **NAME PLATES (RATING PLATES)**
- 3.01.00 Instruction plates, name plates or labels shall be permanently attached to each main and auxiliary item of plant in a conspicuous position. These plates shall be engraved with the identifying name, type and manufacturers serial number, together with the loading conditions under which the item of plant has been designed to operate.
- 3.02.00 Items such as valves, etc. which are subject to hand operation, shall be provided with nameplates so constructed as to remain clearly legible throughout the life of the plant giving due consideration to the difficult climatic conditions to be encountered. Nameplates shall be securely mounted where they will not be obscured in service by insulation, cladding, actuators or other equipment. Direction of flow is also to be engraved.
- 3.03.00 All trade nameplates and labels shall be in English language. All measurements shall be in M.K.S. Units.
- 3.04.00 The size and location of nameplates shall be subject to Approval of the Engineer.
- 4.00.00 **SAFETY AND SECURITY**
- 4.01.00 The design shall incorporate every reasonable precaution and provision for the safety of all personnel and for the safety and security of all persons and

- property. The design shall comply with all appropriate statutory regulations relating to safety. All structures and equipment shall be designed and constructed to withstand every foreseeable static and dynamic loading condition, including loading under earthquake conditions, with an adequate margin of safety.
- 4.02.00 Ready and safe access with clear head room shall be provided to all parts of the plant for operation, inspection, cleaning and maintenance.
- 4.03.00 Escape routes and clear ways shall be provided to allow speedy evacuation of the plant in the event of fire or explosion, and the plant layout shall allow for ease of access to all parts of the Works by rescue and fire fighting teams. The plant layout shall be designed to localise and minimise the effects of any fire or explosion. The recommendations of NFPA, OSHA, and TAC etc. as necessary shall be followed in all respects.
- 4.04.00 The use of corrosive, explosive, toxic or otherwise hazardous materials shall be kept to a minimum during construction and the design of the plant shall minimise the requirement for such materials during operation and maintenance. Where such materials must be used, all necessary precautions shall be taken in the design, manufacture and layout of equipment to minimise the resulting hazard, and all equipment necessary for the protection and first-aid treatment of personnel in the event of accidents shall be provided. Particular attention is drawn to avoid the use of materials containing asbestos in any form.
- 5.00.00 **GUARDS**
- 5.01.00 Effective guards and fences must be provided to prevent injury to operators through accident or malpractice.
- 5.02.00 Mesh guards which allow visual inspection of equipment with the guard in place are generally preferable. The guards shall be constructed of mesh attached to a rigid framework of mild steel rod, tube, or angle and the whole galvanised to prevent loss of strength by rusting or corrosion. The guards shall be designed to facilitate removal and replacement during maintenance.
- 5.03.00 All drive belts, couplings, gears, sharp metallic edges and chains must be safely guarded. Any lubricating nipple requiring attention during normal running must be positioned where they can be reached without moving the guards.
- 5.04.00 Guards for couplings and rotating shafts shall be in accordance with BS 5304-1975 or similar approved standard. All rotating shafts and parts of shafts must be covered.
- 5.05.00 Suitable fencing shall be provided to enclose all openings or doorways used for the hoisting and lowering of machinery etc. This fencing must be securely fixed but quickly detachable when required. A secure hand hold must be provided on each side of the opening or doorway.

6.00.00 LOCATION AND LAYOUT REQUIREMENTS

The majority of plant and equipment (excluding steam generator and some other auxiliaries) shall all be of indoor installation. A broad list of buildings housing such equipment is given elsewhere in this specification. Layout should facilitate access for operation-maintenance and inspection of any one or more equipment/components at a time without disturbing the operation or installation of rest of the plant. Further, Bidder should comply with the criteria given under the various equipment and system specifications as well as those stipulated in Annexure-II attached to this section.

Enclosed General Layout and other tender layout drawings show the location of major installations and auxiliary buildings. The Bidder shall try to retain these locations as far as practicable. The layout of equipment within the power house as shown in the tender drawings is indicative. The Bidder may, subject to Owner's approval alter the same to suit the space requirement of the equipment offered.

Bidder may give as an alternative his own preferred layout clearly indicating the advantages and other implications, if any. Such alternative will not be considered for evaluating the bid, but may be considered with the successful Bidder if Owner/Engineer finds the proposal more attractive in terms of techno-economic consideration.

While developing the layout of buildings the following criteria shall be given effect :

- a) The minimum width of clear access corridors around equipment shall be 1.2 meter.
- b) Each building shall have an identified vacant space for equipment unloading and maintenance and preferably a separate bay altogether in buildings housing heavy equipment. Provision for handling equipment by monorail hoist and/or overhead crane shall be made as specified.
- c) The minimum clear height available between two consecutive floor slabs shall not be less than five (5) meters. A clear head room of 2.5m shall be maintained between the floor and any overhead piping/ cables or other obstruction. Adequate provision for natural ventilation and illumination shall be made as per good engineering practices.
- d) There shall be at least two (2) nos. main access doors, one on either side of each building, of which one shall be minimum 3 meters wide with rolling shutters for equipment entry. For multistoried buildings, at least two (2) nos. regular staircases diagonally opposite to each other shall be provided connecting all the floors and roof. These minimum requirements shall be augmented as required depending on the floor area, statutory requirements and TAC recommendations.
- e) All buildings shall have provision for toilet and associated effluent discharge system together with facility for drinking water. The criteria for ventilation, fire protection and illumination of building spaces specified

elsewhere in this specification shall be complied with.

- f) All rail/road crossings for pipe/cable racks shall be done with minimum 8 meters headroom from top of rail/road to bottom of rack. Similarly top cover over underground pipes/cables shall be minimum one (1) meter. For other detail refer to Annexure-II.
- g) Cubicle for operating personnel shall be located at safe place near the equipment.
- h) Interplant cable routing will be on overhead cable trays on pipe cum cable trestle or on cable trestle except where approved by purchaser/consultant. In exceptional case, small stretch of outdoor run of interplant cable routing may be taken through cable trench only with the Employer's prior approval.
- i) Concept of various mechanical and electrical equipment location and building dimensions (including column-row spacing) as shown in Plot Plan/Floor Plan drawing are to be adhered to. Any departure from this suggestive layout is primarily not recommended.

7.00.00 OPERATION, MAINTENANCE & AVAILABILITY CONSIDERATIONS

7.01.00 Equipment/works offered shall be designed for high availability, high reliability, low maintenance and ease of operation & maintenance. The Bidder shall specifically state the design features incorporated to achieve high degree of reliability, availability, operability and ease of maintenance. He shall also furnish details of availability records in plants stated in his experience list.

7.02.00 Ample space for ease of operation and maintenance including equipment removal, tube bundle/cartridge/rotor pulling etc. shall be provided. All valves, gates, dampers and other devices shall be located and oriented in such a way that they are accessible from operating floor levels. Where this cannot be adhered to, platforms and walkways with access ladders shall be provided to facilitate operation and maintenance.

7.03.0 Motorised lifting devices, i.e. hoists, chain pulleys, jacks, etc. shall be provided for handling and carrying out maintenance of any equipment and/or part having weight in excess of 3000 Kg. Suitable beams, hooks etc. for this purpose shall be provided in the buildings.

No lifting arrangement is necessary for part having weight less than 500 Kg. Hoist shall be well protected by environment. Suitable painting and coating covering hoist at outdoor shall be provided.

Lifting devices like lifting tackles, slings, etc. to be connected to hook of the hoist/crane shall be provided by the Bidder for lifting the equipment, accessories covered under this specification.

7.04.00 All similar parts of the equipment shall be made to gauge and shall be interchangeable with and shall be made of same material and workmanship as the corresponding parts of the equipment. Where feasible common

components shall be employed in different pieces of equipment in order to optimize the spares inventory and utilization.

8.00.00 MATERIALS

8.01.00 In selecting materials of construction of equipment, the Contractor shall pay particular attention to the atmospheric conditions existing at the Site and the nature of material/fluid handled. Wherever deviations are taken in respect of materials specified, the reasons shall be spelt out clearly in the proposal.

All materials shall be new, and shall be of the quality most suited to the proposed application.

8.02.00 In as far as is possible; materials shall be in accordance with Indian or international standard specifications and shall be used in accordance with Indian or international codes of practice. Where such standards or codes of practice are not available sufficient information shall be provided to allow the Owner to assess the suitability of the material for the particular application.

All materials used shall have performed lengthy satisfactory service in similar or more arduous conditions to those proposed by the Contractor.

8.03.00 All parts which could deteriorate or corrode under the influence of the atmospheric, meteorological or soil conditions at the Site, or under the influence of the working conditions shall be suitably and effectively protected so that such deterioration or corrosion is a minimum over the life of the plant.

9.00.00 LUBRICATION

9.01.00 Provision shall be made for suitable efficient lubrication where necessary to ensure smooth operation free from undue wear.

9.02.00 Non ferrous capillary tubing shall be used throughout.

9.03.00 Gear boxes and oil baths shall be provided with filling and drain plugs, both of adequate size. An approved means of oil indication including level switches and temperature indication shall be provided.

9.04.00 All high speed gears shall be oil bath lubricated. Low speed gears shall be lubricated by means of soft grease. Removable and accessible drip pans shall be provided to collect lubricant which may drop from operating parts.

9.05.00 All lubrication points shall be conveniently situated for maintenance purposes. It must be possible to carry out lubrication from a gangway or landing and without the removal of guarding or having to insert the hand into it. Where accessibility to a bearing for oiling purposes would be difficult a method of remote lubrication shall be fitted.

9.06.00 The Contractor shall supply grease gun equipment suitable to service each type of nipple fitted.

10.00.00 LUBRICANTS AND CONTROL FLUIDS

- 10.01.00 The Contractor shall provide a detailed and comprehensive specification for all lubricating oils, greases and control fluids required for the entire plant. A sufficient supply of these shall be provided by the Contractor for initial commissioning, first fill and till COD of the unit.
- 10.02.00 The Contractor shall supply a detailed schedule giving the lubricant testing, cleaning and replacement procedures. All equipment and facilities necessary for the testing, cleaning and changing of lubricants and control fluids shall be provided. The Contractor shall endeavor to reduce the varieties and grades of required lubricants and control fluids to a minimum, matching them where possible to those already in use in the generating station in order to simplify procurement and minimise storage requirements. All lubricants and control fluids shall be of internationally recognised standards and shall be easily obtainable from a large number of Indian suppliers. Bidder shall also indicate the equivalent Indian Standard for the above for easy procurement in future.
- 10.03.00 No lubricant or control fluid shall have toxic or other harmful effects on personnel or on the environment.

11.00.00 OPERATION AND MAINTENANCE

- 11.01.00 The plant shall be designed and constructed so that operation and maintenance manpower requirements are minimised.
- The design and layout shall facilitate inspection, cleaning, maintenance and repair. The importance of continuity of operation is second only to that of safety.
- 11.02.00 Spare parts for equipment shall be interchangeable with the original components and, so far as possible, be of common design and manufacture.
- 11.03.00 All similar standard components/parts of similar standard equipment provided shall be interchangeable with one another. Further identical equipments shall be provided for similar duties so that the same are interchangeable with one another in totality and component wise.
- 11.04.00 All heavy parts (500 Kg and above) must be provided with a convenient arrangement for slinging and handling during erection and overhaul. Any item of plant normally stripped or lifted during periods of maintenance and weighing one tonne or above, shall be clearly marked with its weight.
- 11.05.00 On completion of commissioning, a complete set of tools for the maintenance of the entire plant shall be provided by the Contractor. This shall include all necessary spanners, special wrenches, extraction equipment and any special tools reasonably required by the Engineer. Tools used during erection and commissioning shall not be accepted except with the specific approval of the Engineer.
- 11.06.00 All equipment and major valves should be provided with adequate maintenance approach and facility.

12.00.00 **PLANT LIFE AND MODE OF OPERATION**

The complete plant including all the equipment and systems individually and collectively shall be designed for continuous operation for an economic service life of thirty (30) years under the prevailing site conditions and for the type of duty intended.

The critical components of the Steam Generator, Turbine-Generator and Auxiliary equipment, the life of which is limited by time and temperature dependent mechanisms such as thermal stress, creep and low cycle fatigue, are to be designed considering expected (hot, warm and cold) start-up, shut-down and cyclic load variations.

The allowable stresses shall be reduced so that life expectancy to minimum 2,00,000 hours of operation can be achieved. The Bidder shall discuss this aspect in his technical proposal.

The unit would be operated on base load with cyclic load variation. The load variation is expected to be as per schedule depending on power demand.

The expected start-ups should be considered as minimum
(Based on HPT metal temperature)

Cold start-up (>72 hrs. shutdown)	:	6 per year
Warm start-up (between 10 to 72 hrs. of shutdown)	:	40 per year
Hot start-up (less than 10 hrs. shutdown)	:	160 per year

13.00.00 **PACKAGING & MARKING**

All the equipment shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at site till the time of erection. While packing all the materials, the limitations from the point of view of availability of railway wagon sizes in India should be taken account of. The details of various wagons normally available with Indian Railways for transportation of heavy equipment shall be considered by the Bidder. The Contractor shall be responsible for all loss or damage during transportation, handling and storage due to improper packing.

As per the information available, the dimensions of OD consignment for transportation of the equipment by rail (if any equipment to be handled through rail transportation) are as below :

- | | | | |
|----|---|---|-------------|
| a) | Width of the Package
(from centre-line of rails
- 1.6 metres on both sides) | : | 3.2 Meters |
| b) | Height of the package from rail top | : | 4.47 Meters |

The above indicates the dimensions which can be normally transported on the

wagons without infringement of the "moving gauge". This is however not indicative of the consignment which can be carried out with infringement of "moving gauge" duly authorised and approved by the Indian Railways. There may be difference between the "moving gauge" and the "fixed structure gauge" and consignments infringing the "moving gauge" can be moved after investigation regarding possible infringement with the fixed structures. As the critical fixed structures in each route are different, consignments infringing moving dimensions have to be individually investigated to select a route and also determine the restrictions under which such movement is to be carried out. Such routes selected or other mode of transport envisaged is to be clearly brought out in the proposal wherever transport of over dimensional equipment is involved.

Bidder to consider unloading of material delivered through rail transportation, at near by railway station/ site unloading siding. The subsequent transportation up to project work place shall be considered by road only. All unloading and handling equipment both at railway station siding and at project site shall be arranged by the Bidder. Necessary arrangement to be organized with the railway authority for such purpose shall also be under the scope of services of the Bidder. Bidder may consider entire material delivered up to site through rail transportation only.

The identification marking indicating the name and address of the consignee shall be clearly marked in indelible ink on two opposite sides and top of each of the packages. In addition the Contractor shall include in the marking gross and net weight, outer dimension and cubic measurement. Each package shall be accompanied by a packing note (in weather proof paper) quoting specifically the name of the Contractor, the number and date of contract and names of the office placing the contract, nomenclature of contents and Bill of Material.

For imported equipment and material, suitable port facilities may be used in which case material may be transported from the port by tractor-trailer. Bidder may consider this aspect.

14.00.00 PROTECTION

Equipment having antifriction or sleeve bearings shall be protected by weather-tight enclosures. Coated surfaces shall be protected against impact, abrasion, discoloration and other damages. Surfaces that are damaged shall be repainted.

Electrical equipment, controls and insulations shall be protected against moisture and water damages. All external gasket surfaces and flange faces, couplings, rotating equipment shafts, bearings and like items shall be thoroughly cleaned and coated with rust preventive compound as specified above and protected with suitable wood, metal or other substantial type covering to ensure their full protection. All exposed threaded parts shall be greased and protected with metallic or other substantial type protectors.

All piping, tubing and conduit connections on equipment and other equipment openings shall be closed with rough usage covers or plugs. Female threaded openings shall be closed with rough usage covers or forged steel plugs. The closures shall be taped to seal the interior of the equipment. Open ends of

pipings, tubing and conduit shall be sealed and taped.

Returnable containers and special shipping devices shall be returned by the manufacturer's field representative at the Contractor's expense.

15.00.00 ENVIRONMENT PROTECTION AND NOISE LEVEL REQUIREMENT

15.01.00 Environment Protection

The plant shall be designed for installation and operation in harmony with the surrounding environment and all measures of pollution control shall be ensured by the Bidder to restrict pollution from the liquid effluent and stack emission within the limits as given below with due consideration of Environment (Protection) Rules 1986 as amended till date.

In case the Ministry of Environment & Forest stipulate any other conditions not specified hereunder while clearing the project shall be complied with the plant by the contractor.

15.01.01 For Liquid Effluent

- a) Provision laid down in schedule-I for Thermal Power Plants and also in Schedule-VI. General Standards for discharge of Environmental pollutants Part-A : Effects of Environmental (protection) Rules 1986, as amended till date.
- b) Any specific requirement of State Pollution Authorities over and above the above stipulation.

15.01.02 For Air Emission

- a) Suspended Particulate Matter i.e. dust burden at chimney outlet - Maximum 50 mg/Nm³ (with worst coal and one field out at TMCR).
- b) NO_x - 365 ppm Max. or 750 mg/Nm³ (Equivalent NO₂).
- c) SO₂ - Concentration based standard 2000 mg/Nm³. Load based standard 0.2 metric tonne /MWe/day (for first 500 MW and 0.1 metric tonne/MWe/day for rest of the capacity above 500 MW)

In absence of Indian Standard for emission from power plants as on date, for certain gaseous effluents, the internationally accepted World Bank Standard is to be followed. Indian Standard for emission of power plants are under formulation. Should this standard is published before finalisation of the contract, the bidder has to comply the more stringent of the above norm or the new Indian Standard.

The bidder shall include in his scope all necessary equipment and measuring instruments to comply with above requirements. Location and accessibility of the instruments shall be properly coordinated.

15.02.00 Noise Level Requirement

The plant will be designed, constructed and provided with suitable acoustic measures to ensure the noise level criteria as per the following stipulations.

- a) Maximum noise level shall not exceed 85 dB (A) when measured at 1.0M away from the noise emission source.
- b) Maximum noise level from its source within the premises shall not exceed 70 dB (A) as per Environment (Protection) Rules 1986, Schedule-III, 'Ambient Air Quality Standards' in respect of noise.
- c) Any statutory changes in stipulations regarding noise limitation that may occur in future according to State Pollution Control Board or Central pollution Control Board or Ministry of Environment & Forest regulation during tenure of the contract, the contractor shall comply with the requirement.

An exception will be made for the plant at startup operations and other big pressure reducing devices operating during emergency periods and for the safety valves.

16.00.00 INSPECTION AND TESTING

16.01.00 Inspection and Tests during Manufacture

16.01.01 The method and techniques to be used by the Contractor for the control of quality during manufacture of all plant and equipment shall be agreed with the Owner prior to the Award of Contract.

16.01.02 The Owner's general requirements with respect to quality control and the required shop tests are set out elsewhere in this specification.

16.01.03 Before any item of plant or equipment leaves its place of manufacture the Owner shall be given the option of witnessing inspections and tests for compliance with the specification and related standards.

16.01.04 Advance notice shall be given to the Owner as agreed in the Contract, prior to the stage of manufacture being reached, and the piece of plant must be held at this stage until the Owner has inspected the piece, or has advised in writing that inspection is waived. If having consulted the Owner and given reasonable notice in writing of the date on which the piece of plant will be available for inspection, the Owner does not attend the Contractor may proceed with manufacture having forwarded to the Owner duly certified copies of his own inspection and test results.

The Contractor shall forthwith forward to the engineer duly certified copies of the Test Certificates in six copies (one to the Purchaser and five to the Consulting Engineer) for approval. Distribution of six (6) copies of Test Certificates for approval will be two(2) copies to owner and four(4) copies to consultant. These four(4) copies will be further distributed by consultant after approval to owner, site and bidder. One copy will be retained with the

consultant for record purpose.

Further, nine (9) copies of Shop Test Certificates shall be bound with Instruction Manuals referred to elsewhere. Distribution of nine (9) copies of Shop Test Certificates for approval will be Two (2) copies to owner, Three (3) copies to site, Two (2) copies to consultant, Two (2) copies to owner's library / record.

16.01.05 Under no circumstances any repair or welding of castings be carried out without the consent of the Owner's Engineer. Proof of the effectiveness of each repair by radiographic and/or other non-destructive testing technique, shall be provided to the Engineer along with Defect Map.

16.01.06 All the individual and assembled rotating parts shall be statically and dynamically balanced in the works.

Where accurate alignment is necessary for component parts of machinery normally assembled on site, the Contractor shall allow for trial assembly prior to despatch from place of manufacture.

16.01.07 All materials used for the manufacture of equipment covered under this specification shall be of tested quality. Relevant test certificates shall be made available to the Purchaser. The certificates shall include tests for mechanical properties and chemical analysis of representative material or any other test as required by approved QAP/ Material specification.

16.01.08 All pressure parts connected to pumping main shall be subjected to hydraulic testing at a pressure of 150% of shut-off head for a period not less than one hour. Other parts shall be tested for one and half times the maximum operating pressure or as required by design code of that part, for a period not less than one hour.

16.01.09 All necessary non-destructive examinations shall be performed to meet the applicable code requirements.

16.01.10 All welding procedures adopted for performing welding work shall be qualified in accordance with the requirements of Section-IX of ASME code or IBR as applicable. All welded joints for pressure parts shall be tested by liquid penetrant examination according to the method outlined in ASME Boiler and Pressure Vessel code. Radiography, magnetic particle examination magnuflux and ultrasonic testing shall be employed wherever necessary/recommended by the applicable code. At least 10% of all major butt welding joints shall be radiographed.

16.01.11 Statutory payments in respect of IBR approvals including inspection for design and manufacturer of equipment shall be made by the Bidder. All payment for erection and testing at site (i.e. under IBR jurisdiction) shall also be made by the Bidder. In such case Contractor's scope shall also be extended to preparation of all necessary documents, co-ordination and follow-up with IBR authorities for above approval.

16.02.00 ~~Performance Tests at Site~~

ANNEXURE-I

LIST OF STANDARDS FOR REFERENCE

- a) International Standards Organisation (ISO).
- b) International Electro-technical Commission (IEC).
- c) American Society of Mechanical Engineers (ASME).
- d) American National Standards Institute (ANSI).
- e) American Society for Testing and Materials (ASTM).
- f) American Institute of Steel Construction (AISC).
- g) American Welding Society (AWS).
- h) Architecture Institute of Japan (AIJ).
- i) National Fire Protection Association (NFPA).
- j) National Electrical Manufacturer's Association (NEMA).
- k) Japanese Electro-technical Committee (JEC).
- l) Institute of Electrical and Electronics Engineers (IEEE).
- m) Federal Occupational Safety and Health Regulations (OSHA).
- n) Instrument Society of America (ISA).
- o) National Electric Code (NEC).
- p) Heat Exchanger Institute (HEI).
- q) Tubular Exchanger Manufacturer's Association (TEMA).
- r) Hydraulic Institute (HIS).
- s) International Electro-Technical Commission (IEC) Publications.
- t) Power Test Code for Steam Turbines (PTC).
- u) Applicable German Standards (DIN).
- v) Applicable British Standards (BS).
- w) Applicable Japanese Standards (JIS).

- x) Electric Power Research Institute (EPRI).
- y) Standards of Manufacturer's Standardization Society (MSS).
- z) Bureau of Indian Standards Institution (BIS).
- aa) Indian Electricity Rules.
- bb) Indian Boiler Regulations (IBR).
- cc) Indian Explosives Act.
- dd) Indian Factories Act.
- ee) Tariff Advisory Committee (TAC) rules.
- ff) Emission regulation of Central Pollution Control Board (CPCB).
- gg) Pollution Control regulations of Dept. of Environment, Govt. of India
- hh) Central Board of Irrigation and Power (CBIP) Publications.
- ii) The Air Prevention and Control of Pollution Act.
- jj) The Environmental Protection Act
- kk) The Public Liability Insurance Act.
- ll) The Forest Conservation Act
- mm) The Wildlife protection Act.
- nn) The EIA Notification, 1994.
- oo) IS: 14665-Specification for Electric Traction Lift
- pp) Any other statutory Codes/Standards/Regulations

**TELANGANA STATE POWER GENERATION
CORPORATION LTD
TELANGANA STATE, INDIA**

**1x800 MW KOTHAGUDAM TPS STAGE-VII UNIT#12,
PALONCHA**

**Vol.-IIB
Section-C3**

**TECHNICAL SPECIFICATION
(ELECTRICAL PORTION)**



**BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT,
NOIDA, U.P., INDIA**



TITLE:	ELECTRICAL EQUIPMENT SPECIFICATION FOR	SPECIFICATION NO.
		VOLUME NO. : II-B
		SECTION: C
		REV NO. : 00 DATE: 19/03/2015
	1X800 MW KOTHAGUDEM TPS	SHEET: 1 OF 1

CONTENTS

SECTION	TITLE	NO OF SHEETS
C	SPECIFIC TECHNICAL REQUIREMENTS	1
C	ELECTRICAL SCOPE BETWEEN BHEL & VENDOR	1
C	ELECTRICAL LOAD DATA FORMAT	1
C	DATASHEET-A	1
C	CABLE SCHEDULE FORMAT	1
D	QUALITY PLAN (FOR MOTORS BELOW 55 KW)	2
D	QUALITY PLAN (FOR MOTORS ABOVE & 55 KW)	9
D	SECTION II: TECHNICAL SPECIFICATION FOR AC & DC MOTORS	14
D	SECTION IV: TECHNICAL SPECIFICATION FOR CABLES	17



**TECHNICAL SPECIFICATION FOR
CRANES & HOISTS
(ELECTRICAL PORTION)**

SPECIFICATION NO.
VOLUME II B
SECTION-C
REV 0 DATE 19.03.2015
PAGE 1 OF 2

SPECIFIC TECHNICAL REQUIREMENTS: ELECTRICAL

1.0 EQUIPMENT & SERVICES TO BE PROVIDED BY BIDDER:

- a) Services and equipment as per “Electrical Scope between BHEL and Vendor”.
- b) Any item/work either supply of equipment or erection material which have not been specifically mentioned but are necessary to complete the work for trouble free and efficient operation of the plant shall be deemed to be included within the scope of this specification. The same shall be provided by the bidder without any extra charge.
- c) Supply of mandatory spares as specified in the specifications of mechanical equipments.
- d) Electrical load requirement for Cranes.
- e) All equipment shall be suitable for the power supply fault levels and other climatic conditions mentioned in the enclosed project information.
- f) Bidder to furnish list of makes for each equipment at contract stage, which shall be subject to customer/BHEL approval without any commercial and delivery implications to BHEL.
- g) Various drawings, data sheets as per required format, Quality plans, calculations, test reports, test certificates, operation and maintenance manuals etc shall be furnished as specified at contract stage. All documents shall be subject to customer/BHEL approval without any commercial implication to BHEL.
- h) Motor shall meet minimum requirement of motor specification.
- i) Vendor to clearly indicate equipment locations and local routing lengths in their cable listing furnished to BHEL.
- j) Cable BOQ worked out based on routing of cable listing provided by the vendor for “both end equipment in vendor’s scope” shall be binding to the vendor with +10 % margin to take care of slight variation in routing length & wastages.

**2.0 EQUIPMENT & SERVICES TO BE PROVIDED BY PURCHASER FOR
ELECTRICAL & TERMINAL POINTS:**

Refer “Electrical Scope between BHEL and Vendor”.

3.0 DOCUMENTS TO BE SUBMITTED ALONG WITH BID

- 3.1 The electrical specification without any deviation from the technical/quality assurance requirements stipulated shall be deemed to be complied by the bidder in case bidder furnishes the overall compliance of package technical specification in the form of compliance certificate/No deviation certificate.
- 3.2 No technical submittal such as copies of data sheets, drawings, write-up, quality plans, type test certificates, technical literature, etc, is required during tender stage. Any such submission even if made, shall not be considered as part of offer.



**TECHNICAL SPECIFICATION FOR
CRANES & HOISTS
(ELECTRICAL PORTION)**

SPECIFICATION NO.
VOLUME II B
SECTION-C
REV 0
PAGE 2 OF 2

DATE 19.03.2015

4.0 List of enclosures :

- a) Electrical scope between BHEL & vendor (Annexure –I)
- b) Technical specification for motors.
- c) Datasheets & quality plan for motors.
- d) Electrical Load data format (Annexure –II)
- e) BHEL cable listing format (Annexure –III)
- f) Electrical mandatory spares (As per spec.)

STANDARD ELECTRICAL SCOPE BETWEEN BHEL AND VENDOR (FOR EPC PROJECTS)

PACKAGE: SINGLE GIRDER CRANE

SCOPE OF VENDOR: SUPPLY

PROJECT : 1X800 MW KOTHAGUDEM TPS

<u>S.NO</u>	<u>DETAILS</u>	<u>SCOPE SUPPLY</u>	<u>SCOPE E&C</u>	<u>REMARKS</u>
1	Isolating Switch	Vendor	BHEL	BHEL will provide one number 415 V(3 ph,4W) supply feeder only up to isolating switches for cranes/ hoists. Any other voltage level (AC/DC) required will be derived by the vendor. Motor starter shall be part of crane/ hoist control panel.
2	Power cables, control cables, screened control cables and any special cables (if required) between equipment supplied by vendor.	Vendor	BHEL	Cable from supply feeder to isolating switch shall be in BHEL scope.
3	Cabling material (cable trays, accessories, cable tray supporting system, conduits etc).	Vendor	BHEL	
4	Equipment Earthing	BHEL	BHEL	All equipment metallic enclosures / frames, metal structure etc. shall be grounded at two points each to the nearest grounding points / risers provided by BHEL
5	Motors	Vendor	BHEL	
6	Cable glands and lugs for equipment supplied by vendor	Vendor	BHEL	1. Double compression Ni-Cr plated brass cable glands 2. Solder less crimping type heavy duty tinned copper lugs for power & control cables.
7	a) Input cable schedules (C & I) b) Cable interconnection details for above c) Cable block diagram	Vendor Vendor Vendor	- - -	Cable listing for Control and Instrumentation Cable in enclosed excel format shall be submitted by vendor during detailed engineering stage.
8	Equipment layout drawings	Vendor	-	
9	Electrical Equipment GA drawing	Vendor	-	For necessary interface review.

[illegible]

	TITLE LV MOTORS DATA SHEET-A		SPECIFICATION NO.	
			VOLUME	II B
			SECTION	C
			REV NO. 00	DATE 19.03.2015
			SHEET 1	OF 1

1.0	Design ambient temperature	:	50 °C
2.0	Maximum acceptable kW rating of LV motor	:	<175 KW
3.0	Installation (Indoors/ Outdoors)	:	As required
4.0	Degree Of Protection	:	IP55 - Outdoor IP54 – Indoor
5.0	Details of supply system		
	a) Rated voltage (with variation)	:	415V ± 10%
	b) Rated frequency (with variation)	:	50 Hz (Variation: +3% TO –5%)
	c) Combined voltage & freq. variation	:	10% (sum of absolute values)
	d) System fault level at rated voltage	:	25 kA for 1 sec
	e) Short time rating for terminal box	:	25 kA for 0.25 sec
	f) LV System grounding	:	Solidly
6.0	Class of insulation	:	Class ‘F’,with temp rise limited to class B.
7.0	Minimum voltage for starting (As percentage of rated voltage)	:	85% of rated voltage
8.0	Power cables data	:	Shall be given during Detailed engg.
9.0	Earth Conductor Size & Material	:	Shall be given during Detailed engg.
10.0	Space heater supply (30KW & ABOVE)	:	240 V, 1Φ , 50 Hz
11.0	Rating up to which Single phase motor	:	Acceptable below 0.20 Kw
12.0	TYPE OF STARTER PROVIDED IN MCC	:	DOL
13.0	Locked rotor current		
	a) Limit as percentage of FLC	:	600%
	b) Permissible tolerance, if any	:	±20%
14.0	Additional tests	:	As per QP
15.0	Flame-proof motor		
	a) Enclosure suitable (As per IS:2148)	:	As per requirement
	b) Classification of Hazardous area (As per IS: 5572 part-I)	:	As per requirement
	c) Degree of protection	:	IP65
16.0	Makes	:	As per Annexure- III
17.0	Terminal box	:	Suitable to rotate at 90 degrees
18.0	Paint shade	:	As per Annexure- III

All LT motors shall be controlled as follows:
a) Up to 110kW: - Contactor operated.
b) 110Kw to 175kW shall have ACB.

77 of 163

ANNEXURE III

[illegible]

		CUSTOMER :			PROJECT		SPECIFICATION :				
		BIDDER/ VENDOR			TITLE		NUMBER :				
		SYSTEM			QUALITY PLAN		SPECIFICATION				
SHEET 1 OF 2		BIDDER/ VENDOR			ITEM AC ELECT. MOTORS BELOW 55KW (LV)		TITLE				
SL. NO.	COMPONENT/OPERATION	CHARACTERISTICS CHECK	CAT.	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY	REMARKS	
1	2	3	4	5	6	7	8	9	P	W	V
1.0	ASSEMBLY	1.WORKMANSHIP 2.DIMENSIONS 3.CORRECTNESS COMPLETENESS TERMINATIONS/ MARKING/COLOUR CODE	MA	VISUAL	100%	MANUF'S SPEC	MANUF'S SPEC	-DO-	2	-	-
			MA	-DO-	-DO-	MFG. DRG./ MFG. SPEC.	MFG. DRG./ MFG. SPEC.	-DO-	2	-	-
			MA	VISUAL	100%	MFG.SPEC./ RELEVANT IS	MFG.SPEC. RELEVANT IS	-DO-	2	-	-
2.0	PAINTING	1.SHADE	MA	VISUAL	SAMPLE	MANUF'S SPEC/BHEL SPEC./RELEVANT STANDARD	BHEL SPEC. SAME AS COL.7	LOG BOOK	2	-	-
3.0	TESTS	1.ROUTINE TEST INCLUDING SPECIAL TEST AS PER BHEL SPEC. 2.OVERALL DIMENSIONS & ORIENTATION	MA	-DO-	100%	IS-325/ BHEL SPEC./ DATA SHEET	SAME AS COL.7	TEST REPORT	2	1	NOTE -1 & NOTE-3
			MA	MEASUREMENT & VISUAL	100%	APPROVED DRG/DATA SHEET	APPROVED DRG/DATA SHEET & RELEVANT IS	INSPN. REPORT	2	1	NOTE -1 & NOTE-3
BHEL		PARTICULARS			BIDDER/VENDOR						
		NAME									
		SIGNATURE									

	QUALITY PLAN		CUSTOMER :		PROJECT TITLE		SPECIFICATION : NUMBER :	
	BIDDER/ :		BIDDER/ :		QUALITY PLAN		SPECIFICATION : TITLE :	
	VENDOR		SYSTEM		NUMBER PED-506-00-Q-006, REV-01		SECTION	
	SHEET 2 OF 2		CAT.		ITEM AC ELECT. MOTORS BELOW 55KW (LV)		VOLUME III	
SL. NO.	COMPONENT/OPERATION	CHARACTERISTICS CHECK	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY
								P W V
1	2	3	4	5	6	7	8	9
		3.NAMEPLATE DETAILS	MA	VISUAL	100%	IS-325 & DATA SHEET	IS-325 & DATA SHEET	INSPN. REPORT
								2 1 -
NOTES: 1 ROUTINE TESTS ON 100% MOTORS SHALL BE DONE BY THE VENDOR. HOWEVER, BHEL SHALL WITNESS ROUTINE TESTS ON RANDOM SAMPLES. THE SAMPLING PLAN SHALL BE MUTUALLY AGREED UPON 2 WHERE EVER CUSTOMER IS INVOLVED IN INSPECTION, (1) SHALL MEAN BHEL AND CUSTOMERS BOTH TOGETHER. 3 FOR EXHAUST/VENTILATION FAN MOTORS OF RATING UPTO 1.5KW . ONLY ROUTINE TEST CERTIFICATES SHALL BE FURNISHED FOR SCRUTINY.								
<u>Legends for Inspection agency</u> 1. BHEL/CUSTOMER 2. VENDOR (MOTOR MANUFACTURER) 3. SUB-VENDOR (RAW MATERIAL/COMPONENTS SUPPLIER) P. PERFORM W. WITNESS V. VERIFY								
BHEL								
PARTICULARS								
NAME								
SIGNATURE								
DATE								
BIDDER'S/VENDORS COMPANY SEAL								

		QUALITY PLAN		CUSTOMER :			PROJECT		SPECIFICATION :		
				BIDDER/ VENDOR			TITLE		NUMBER :		
				SYSTEM			QUALITY PLAN		TITLE		
		SHEET 1 OF 9		CAT.			ITEM: AC ELECT. MOTORS 55 KW & ABOVE (LV & MV)		VOLUME III		
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	SECTION			REMARKS
								AGENCY	P	W	V
1	2	3	4	5	6	7	8	9	10		11
1.0	RAW MATERIAL & BOUGHT OUT CONTROL										
1.1	SHEET STEEL, PLATES, SECTION, EYEBOLTS	1.SURFACE CONDITION	MA	VISUAL	100%	-	FREE FROM BLINKS, CRACKS, WAVINESS ETC	LOG BOOK	3	-	-
		2.DIMENSIONS	MA	MEASUREMENT	SAMPLE	MANFR'S DRG./SPEC	MANFR'S DRG./SPEC	-DO-	3	-	-
		3.PROOF LOAD TEST (EYE BOLT)	MA	MECH. TEST	-DO-	-DO-	INSPEC. REPORT		3	-	2
1.2	HARDWARES	1.SURFACE CONDITION	MA	VISUAL	100%		FREE FROM CRACKS, UN-EVENNESS ETC.	-DO-	3	-	-
		2.PROPERTY CLASS	MA	VISUAL	SAMPLES	MANFR'S DRG./SPEC BOOK	RELEVANT IS/SPEC.	SUPPLIERS TC & LOG	3	-	2
1.3	CASTING	1.SURFACE CONDITION	MA	VISUAL	100%		FREE FROM CRACKS, BLOW HOLES ETC.	LOG BOOK	3	-	2
		2.CHEM. & PHY. PROP.	MA	CHEM & MECH TEST	1/HEAT NO.	MANFR'S DRG./SPEC	RELEVANT IS/	SUPPLIER'S TC	3	-	2
		3.DIMENSIONS	MA	MEASUREMENT	100%	MANUFUR'S DRG.	MANUFUR'S DRG.	LOG BOOK	3	-	2
1.4	PAINT & VARNISH	1.MAKE, SHADE, SHELF LIFE & TYPE	MA	VISUAL	100% CONTINUOUS	MANFR'S DRG./SPEC	MANFR'S DRG./SPEC	LOG BOOK	3	-	2
BHEL		PARTICULARS			BIDDER/VENDOR						
		NAME									
		SIGNATURE									
		DATE									
								BIDDER'S/VENDORS COMPANY SEAL			

		QUALITY PLAN SHEET 2 OF 9		CUSTOMER :		PROJECT		SPECIFICATION :								
				BIDDER/ :		TITLE		NUMBER :								
				VENDOR SYSTEM		QUALITY PLAN NUMBER PED-506-00-Q-007, REV-03 ITEM: AC ELECT. MOTORS 55 KW & ABOVE (LV & MV)		TITLE								
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	CAT.	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY	SECTION	VOLUME III	REMARKS				
1	2	3	4	5	6	7	8	9	P	W	V					
1.5	SHAFT (FORGED OR ROLLED)	1. SURFACE COND. 2. CHEM. & PHYSICAL PROPERTIES 3. DIMENSIONS 4. INTERNAL FLAWS	MA	VISUAL	100%	-	FREE FROM VISUAL DEFECTS	-DO-	3	-	-	VENDOR'S APPROVAL IDENTIFICATION SHALL BE MAINTAINED				
1.6	SPACE HEATERS, CONNECTORS, TERMINAL BLOCKS, CABLE LUGS, CARBON BRUSH TEMP. DETECTORS, RTD, BTD'S	1. MAKE & RATING	MA	VISUAL	-DO-	1/HEAT NO. OR HEAT TREATMENT BATCH NO	MFG. DRG. SPEC.	SUPPLIER'S TC	3	-	2					
		2. PHYSICAL COND.	MA	-DO-	-DO-	100%	-DO-	MANUFR'S DRG.	LOG BOOK	3	-	2				
		3. DIMENSIONS (WHEREVER APPLICABLE)	MA	MEASUREMENT	SAMPLE	MEASUREMENT	ASTM-A388	MANUFR'S DRG. SPEC.	-DO-	3	2	1	FOR DIA OF 55 MM & ABOVE			
		4. PERFORMANCE/ CALIBRATION	MA	TEST	100%	-DO-	MANUFR'S DRG. SPEC.	MANUFR'S DRG. SPEC.	-DO-	3	-	2				
			MA	TEST	100%	-DO-	-DO-	NO PHYS. DAMAGE, NO ELECTRICAL DISCONTINUITY	-DO-	3	-	2				
BHEL PARTICULARS NAME SIGNATURE DATE													BIDDER/VENDOR NAME SIGNATURE DATE		BIDDER'S/VENDORS COMPANY SEAL	

		QUALITY PLAN		CUSTOMER :			PROJECT		SPECIFICATION :			
				BIDDER/ VENDOR :			TITLE		NUMBER :			
				SYSTEM			QUALITY PLAN		SECTION			
				CAT.			ITEM: AC ELECT. MOTORS 55 KW & ABOVE (LV & MV)		VOLUME III			
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	EXTENT OF CHECK	TYPE/METHOD OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY	P	W	V	REMARKS
1	2	3	4	5	6	7	8	9	10			11
1.7	OTHER INSULATING MATERIALS LIKE SLEEVES, BINDINGS CORDS, PAPERS, PRESS BOARDS ETC.	1. SURFACE COND. ETC. 2. OTHER CHARACTERISTICS	MA	VISUAL	100%	-	NO VISUAL DEFECTS	INSPT. REPORT	3	-	2	
1.8	SHEET STAMPING (PUNCHED)	1. SURFACE COND. 2. DIMENSIONS INCLUDING BURS HEIGHT 3. ACCEPTANCE TESTS	MA	VISUAL	100%	MANUF'S SPEC.	NO VISUAL DEFECTS (FREE FROM BURS)	LOG BOOK AND OR SUPPLIER'S TC	3	-	2	
1.9	CONDUCTORS	1. SURFACE FINISH 2. ELECT. PROP. & MECH. PROP	MA	ELECT. & MECH. TESTS	100%	MANUF'S SPEC./ RELEVANT IS	RELEVANT IS	SUPPLIER'S TC	3	-	2	FOR MV MOTOR INSULATION/VARNISH THICKNESS SHALL BE MORE THAN THE BURS HEIGHT
			MA	VISUAL	100%	-	FREE FROM VISUAL DEFECTS	LOG BOOK	3*	-	2*	* MOTOR MANUFACTURER TO CONDUCT VISUAL CHECK FOR SURFACE FINISH ON RANDOM BASIS (10% SAMPLE) AT HIS WORKS AND MAINTAIN RECORD FOR VERIFICATION BY BHEL/CUSTOMER.
BHEL												
PARTICULARS			BIDDER/VENDOR									
NAME												
SIGNATURE												
DATE												
BIDDER'S/VENDORS COMPANY SEAL												

		QUALITY PLAN		CUSTOMER :		PROJECT TITLE		SPECIFICATION : NUMBER :						
				BIDDER / VENDOR :		QUALITY PLAN NUMBER PED-506-00-Q-007, REV-03		SPECIFICATION : TITLE						
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	SHEET 4 OF 9	CAT.	SYSTEM	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	SECTION AGENCY	VOLUME III REMARKS		
												P	W	V
1	2	3	4	5	6	7	8	9	10	11				
1.10	BEARINGS	3.DIMENSIONS	MA	MEASUREMENT	-DO-	-DO-	-DO-	MANFR'S DRG./ APPROVED DATASHEET	-DO-	Log Book	3	-	2	
		1.MAKE & TYPE	MA	VISUAL	100%				MANFR'S DRG./ APPROVED DATASHEET	-DO-		3	-	2
		2.DIMENSIONS	MA	MEASUREMENT	SAMPLE				BHEL DATA SHEET BEARING MANUF'S CATALOGUES	-DO-		3	-	2
		3.SURFACE FINISH	MA	VISUAL	100%				FREE FROM VISUAL DEFECTS	-DO-		3	-	2
		1.SURFACE COND.	MA	VISUAL	100%				-DO-	-DO-		3	-	-
1.11	SLIP RING (WHEREVER APPLICABLE)	2.DIMENSIONS	MA	MEASUREMENT	SAMPLE			MANUF'S DRG	MANUF'S DRG	-DO-	3	-	-	
		3.TEMP.WITH-STAND CAPACITY	MA	ELECT.TEST	-DO-				MANUF'S SPEC./BHEL SPEC.	-DO-		3	-	2
		4.HV/IR	MA	-DO-	100%				-DO-	-DO-		3	-	2
		1.MATERIAL OF GASKET	MA	VISUAL	100%				MANUF'S DRG/SPECS	-DO-		3	-	-
		2.SURFACE COND.	MA	VISUAL	100%				FREE FROM VISUAL DEFECTS	-DO-		3	-	-
1.12	OIL SEALS & GASKETS	3.DIMENSIONS	MA	MEASUREMENT	SAMPLE			MANUF'S DRG	MANUF'S DRG	-DO-	3	-	-	
BHEL		PARTICULARS				BIDDER/VENDOR								
		NAME												
		SIGNATURE												
		DATE												
BIDDER'S/VENDORS COMPANY SEAL														

		QUALITY PLAN		CUSTOMER :		PROJECT		SPECIFICATION :				
				BIDDER/ :		TITLE		NUMBER :				
				VENDOR		QUALITY PLAN		SPECIFICATION :				
		SHEET 5 OF 9		SYSTEM		NUMBER PED-506-00-Q-007, REV.03		TITLE				
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	CAT.	TYPE/ METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	SECTION			VOLUME III REMARKS
									P	W	V	
1	2	3	4	5	6	7	8	9	10			11
2.0	IN PROCESS											
2.1	STATOR FRAME WELDING (IN CASE OF FABRICATED STATOR)	1.WORKMANSHIP & CLEANNES	MA	VISUAL	100%	-DO-	GOOD FINISH	LOG BOOK	3/2	2	-	
2.2	MACHINING	2.DIMENSIONS	MA	MEASUREMENT	-DO-	MANUF'S DRG	MANUF'S DRG	-DO-	2	-	-	
		1.FINISH	MA	VISUAL	100%	-DO-	GOOD FINISH	LOG BOOK	2	-	-	
		2.DIMENSIONS	MA	MEASUREMENT	-DO-	MANUF'S DRG	MANUF'S DRG	-DO-	2	-	-	
		3.SHAFT SURFACE FLOWS	MA	PT	-DO-	RELEVANT SPEC./ASTM-E165	MANUF'S SPEC./BHEL SPEC./	-DO-	2	-	1	
2.3	PAINTING	1.SURFACE PREPARATION	MA	VISUAL	100%	MANFR'S SPEC/BHEL SPEC./RELEVANT STAND	BHEL SPEC. SAME AS COL.7	LOG BOOK	2	-	-	
		2.PAINT THICKNESS (BOTH PRIMER & FINISH COAT)	MA	MEASUREMENT BY ELCOMETER	SAMPLE	-DO-	-DO-	-DO-	2	-	-	
		3.SHADE	MA	VISUAL	-DO-	-DO-	-DO-	Log Book	2	-	-	
		4.ADHESION	MA	CROSS CUTTING & TAPE TEST	-DO-	-DO-	-DO-	Log Book	2	-	-	
BHEL												
PARTICULARS				BIDDER/VENDOR								
NAME												
SIGNATURE												
DATE												
				BIDDER'S/VENDORS COMPANY SEAL								

		CUSTOMER :		PROJECT		SPECIFICATION :					
QUALITY PLAN		BIDDER/ VENDOR		TITLE		NUMBER :					
SHEET 6 OF 9		SYSTEM		QUALITY PLAN		TITLE					
COMPONENT/OPERATION		CAT.		ITEM: AC.ELECT. MOTORS 55 KW & ABOVE (LV & MV)		VOLUME III					
SL. NO.	CHARACTERISTIC CHECK	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	REMARKS				
1	2	3	4	5	6	7	8	9	10	11	
2.4	SHEET STACKING	1.COMPLETENESS	MA	MEASUREMENT	SAMPLE	MANUFR'S SPEC.	MANUFR'S SPEC.	Log Book	2	-	-
		2.COMPRESSION & TIGHTENING	MA	MEASUREMENT	100%	-DO-	-DO-	Log Book	2	-	-
		3.CORE LOSS & HOTSPOT	MA	ELECT.TEST	-DO-	-DO-	-DO-	Log Book	2	1*	1
2.5	WINDING	1.COMPLETENESS	CR	VISUAL	100%	MANUFR'S SPEC./BHEL SPEC.	MANUFR'S SPEC./BHEL SPEC.	Log Book	2	-	-
		2.CLEANLINESS	CR	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	-
		3.IR-HV-IR	CR	ELECT. TEST	-DO-	-DO-	-DO-	Log Book	2	-	1
		4.RESISTANCE	CR	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	1
		5.INTERTURN INSULATION	CR	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	-
		6.SURGE WITH STAND AND TAN. DELTA TEST	CR	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	1
2.6	IMPREGNATION	1.VISCOSITY	MA	PHY. TEST	AT STARTING	-DO-	-DO-	Log Book	2	-	-
		2.TEMP. PRESSURE VACCUM	MA	PROCESS CHECK	CONTINUOUS	-DO-	-DO-	Log Book	2	-	-
		3.NO. OF DIPS	MA	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	1
BHEL		PARTICULARS		BIDDER/VENDOR						THREE DIPS TO BE GIVEN	
		NAME									
		SIGNATURE									
		DATE									
										BIDDER'S/VENDORS COMPANY SEAL	

		CUSTOMER :		PROJECT		SPECIFICATION :							
		QUALITY PLAN		TITLE		NUMBER :							
				BIDDER/ VENDOR		SPECIFICATION :							
SHEET 7 OF 9		SYSTEM		QUALITY PLAN		TITLE		VOLUME III					
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	CAT.	TYPE/ METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY	SECTION	REMARKS		
1	2	3	4	5	6	7	8	9	P	W	V		
2.7	COMPLETE STATOR ASSEMBLY	4.DURATION	MA	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	1		
		1.COMPACTNESS & CLEANLINESS	MA	VISUAL	100%	-DO-	-DO-	Log Book	2	-	-		
2.8	BRAZING/COMPRESSION JOINT	1.COMPLETENESS	CR	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	-		
		2.SOUNDNESS	CR	MALLET TEST & UT	-DO-	-DO-	-DO-	Log Book	2	-	1		
2.9	COMPLETE ROTOR ASSEMBLY	3.HV	MA	ELECT. TEST	-DO-	-DO-	-DO-	Log Book	2	-	1	VERIFICATION FOR MV MOTOR ONLY	
		1.RESIDUAL UNBALANCE	CR	DYN. BALANCE	-DO-	MFG SPEC./ ISO 1940	MFG. DWG.	Log Book	2	-	1		
2.10	ASSEMBLY	2.SOUNDNESS OF DIE CASTING	CR	ELECT. (GROWLER TEST)	-DO-	MFG. SPEC.	MFG. SPEC.	Log Book	2	-	1		
		1.ALIGNMENT	MA	MEAS.	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	-	
		2.WORKMANSHIP	MA	VISUAL	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	-	
		3.AXIAL PLAY	MA	MEAS.	-DO-	-DO-	-DO-	-DO-	Log Book	2	-	1	
		4.DIMENSIONS	MA	-DO-	-DO-	-DO-	MFG.DRG/ MFG SPEC.	MFG.DRG/ RELEVANT IS	Log Book	2	-	-	
		5.CORRECTNESS, COMPLETENESS TERMINATIONS/ MARKING/ COLOUR CODE	MA	VISUAL	100%	MFG SPEC. RELEVANT IS	MFG SPEC. RELEVANT IS	Log Book	2	-	-		
		6. RTD, BTD & SPACE HEATER MOUNTING.	MA	VISUAL	100%	MFG SPEC. RELEVANT IS	MFG SPEC. RELEVANT IS	Log Book	2	-	1		
BHEL		PARTICULARS		BIDDER/VENDOR									
		NAME											
		SIGNATURE											
		DATE										BIDDER'S/VENDORS COMPANY SEAL	

		CUSTOMER :		PROJECT		SPECIFICATION :						
QUALITY PLAN		BIDDER / VENDOR		TITLE		NUMBER :		TITLE				
		SYSTEM		QUALITY PLAN		SECTION		VOLUME III				
		CAT.		ITEM: AC ELECT. MOTORS 55 KW & ABOVE (LV & MV)		AGENCY		REMARKS				
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	P	W	V		
1	2	3	4	5	6	7	8	9	10			11
3.0	TESTS	1. TYPE TESTS INCLUDING SPECIAL TESTS AS PER BHEL SPEC. 2. ROUTINE TESTS INCLUDING SPECIAL TEST AS PER BHEL SPEC. 3. VIBRATION & NOISE LEVEL 4. OVERALL DIMENSIONS AND ORIENTATION 5. DEGREE OF PROTECTION 6. MEASUREMENT OF RESISTANCE OF RTD & BTD 7. MEASUREMENT OF RESISTANCE, IR OF SPACE HEATER 8. NAMEPLATE DETAILS 9. EXPLOSION FLAME PROOF NESS (IF SPECIFIED) 10. PAINT SHADE, THICKNESS & FINISH	MA	ELECT. TEST	1/TYPE/SIZE	IS-325/ BHEL SPEC./ DATA SHEET	IS-325/ BHEL SPEC./ DATA SHEET	TEST REPORT	2	1*	1	* NOTE - 1
			MA	-DO-	100%	-DO-	-DO-	-DO-	2	1 ^s	1	\$ NOTE - 2
			MA	-DO-	100%	IS-12075 & IS-12065	IS-12075 & IS-12065	-DO-	2	1 ^s	1	\$ NOTE - 2
			MA	MEASUREMENT & VISUAL	100%	APPROVED DRG/DATA SHEET	APPROVED DRG/DATA SHEET & RELEVANT IS	INSPC. REPORT	2	1	-	
			MA	ELECT. & MECH. TEST	1/TYPE/ SIZE	RELEVANT IS	BHEL SPEC. AND DATA SHEET	TC	2	-	1	TC FROM AN INDEPENDENT LABORATORY, REFER NOTE-3
			MA	-DO-	100%	-DO-	-DO-	-DO-	2	1 ^s	1	\$ NOTE - 2
			MA	-DO-	100%	-DO-	-DO-	-DO-	2	1 ^s	1	\$ NOTE - 2
			MA	VISUAL	100%	IS-325 & DATA SHEET	IS-325 & DATA SHEET	INSPC. REPORT	2	1 ^s	1	\$ NOTE - 2
			MA	EXPLOSION FLAME PROOF TEST	1/TYPE	IS-3682 IS-8239 IS-8240	IS-3682 IS-8239 IS-8240	TC	2	-	1	TC FROM AN INDEPENDENT LABORATORY, REFER NOTE-3
			MA	VISUAL & MEASUREMENT BY ELKOMETER	SAMPLE	BHEL SPEC. & DATA SHEET	BHEL SPEC. & DATA SHEET	TC	2	1 ^s	1	SAMPLING PLAN TO BE DECIDED BY INSPECTION AGENCY \$ NOTE - 2
BHEL		PARTICULARS		BIDDER/VENDOR								
		NAME										
		SIGNATURE										
		DATE										
				BIDDER'S/VENDORS COMPANY SEAL								

VOLUME: V-A

SECTION-II

**TECHNICAL SPECIFICATION
FOR
A.C. & D.C. MOTORS**

CONTENT

CLAUSE NO.	DESCRIPTION
1.00.00	SCOPE
2.00.00	CODES & STANDARDS
3.00.00	SERVICE CONDITIONS
4.00.00	TYPE AND RATING
5.00.00	PERFORMANCE
6.00.00	SPECIFIC REQUIREMENTS
7.00.00	ACCESSORIES
8.00.00	TESTS
9.00.00	DRAWINGS, DATA & MANUALS

ATTACHMENT

ANNEXURE-A	DESIGN DATA
------------	-------------

VOLUME: V-A

SECTION-II

**TECHNICAL SPECIFICATION
FOR
A.C. & D.C. MOTORS**

- 1.00.00 **SCOPE**
- 1.01.00 This section covers the general requirements of the drive motors for power station auxiliary equipment.
- 1.02.00 Motors shall be furnished in accordance with both this general specification and the accompanying driven equipment specification.
- 1.03.00 In case of any discrepancy, the driven equipment specification shall govern.
- 2.00.00 **CODES & STANDARDS**
- 2.01.00 All motors shall conform to the latest applicable IS, IEC and CBIP Standards/ Publications except when otherwise stated herein or in the driven equipment specification.
- 2.02.00 Major standards, which shall be followed, are listed below other applicable Indian Standards for any component part even if not covered in the listed standards shall also be followed:
- i) IS-325
- ii) IS-12615
- iii) IEC-60034
- 3.00.00 **SERVICE CONDITIONS**
- 3.01.00 The motors will be installed in hot, humid and tropical atmosphere highly polluted at places with coal dust and/or fly ash.
- 3.02.00 Unless otherwise noted, electrical equipment/system design shall be based on the service conditions and auxiliary power supply given in the annexure to this specification.
- 3.03.00 For motor installed outdoor and exposed to direct sunrays, the effect of solar heat shall be considered in the determination of the design ambient temperature.
- 4.00.00 **TYPE AND RATING**
- 4.01.00 **A.C. Motors**
- 4.01.01 Motors shall be general purpose, constant speed, squirrel cage, three/single phase, induction type.

- 4.01.02 All motors shall be rated for continuous duty. They shall also be suitable for long period of inactivity.
- 4.01.03 LT motor & HT motor name-plate rating at 50°C shall have at least 15% margin and 10% margin respectively over the input power requirement of the driven equipment at rated duty point unless stated otherwise in driven equipment specification.
- 4.01.04 The motor characteristics shall match the requirements of the driven equipment so that adequate starting, accelerating, pull up, break down and full load torques are available for the intended service.
- 4.01.05 Motors efficiency class shall be IE1, IE2 as per latest version of IEC-60034.
- 4.02.00 **D.C. Motors**
- 4.02.01 D.C. motor provided for emergency service shall be shunt/compound wound type.
- 4.02.02 Motor shall be sized for operation with fixed resistance starter for maximum reliability.
- Starter panel complete with all accessories shall be included in the scope of supply.
- 5.00.00 **PERFORMANCE**
- 5.01.00 **Running Requirements**
- 5.01.01 Motor shall run continuously at rated output over the entire range of voltage and frequency variations as given in the annexure.
- 5.01.02 The motor shall be capable of operating satisfactorily at full load for 5 minutes without injurious heating with 75% rated voltage at motor terminals.
- 5.01.03 The motor shall be designed to withstand momentary overload of 60% of full load torque for 15 second without any damage.
- 5.02.00 **Starting Requirements**
- Motor shall be designed for direct online starting at full voltage. Breakaway starting current as percentage of full load current for various motor rating shall not exceed the given below-
- | | | |
|---------------------|---|---|
| Motors up to 1500kW | - | 600% subject to IS tolerance of plus 20%. |
| Motors above 1500kW | - | 450% not subject to any positive tolerance. |
- 5.02.01 The motor shall be capable of withstanding the stresses imposed if started at 110% rated voltage.

- 5.02.02 Motor shall start with rated load and accelerate to full speed with 80% rated voltage at motor terminals except mill motor. Mill motor shall start with rated load and accelerate to full speed at 85% of the rated voltage at the motor terminals.
- 5.02.03 a) Two hot starts in succession with motor initially at normal running temperature.
- b) Pump motor subject to reverse rotation shall be designed to withstand the stresses encountered when starting with shaft rotating at 125% rated speed in reverse direction.
- 5.02.04 The motors shall be designed to withstand 120% of rated speed for 2 minutes without any mechanical damage.
- 5.03.00 **Stress During Bus Transfer**
- 5.03.01 The motor may be subjected to sudden application of 150% rated voltage during bus transfer, due to the phase difference between the incoming voltage and motor residual voltage.
- 5.03.02 The motor shall be designed to withstand any torsional and/or high current stresses, which may result, without experiencing any deterioration in the normal life and performance characteristics.
- 5.04.00 **Locked Rotor Withstand Time**
- 5.04.01 The locked rotor withstand time under hot condition at 110% rated voltage shall be more than motor starting time by at least 3 seconds for motors up to 20 seconds starting time and by 5 seconds for motor with more than 20 seconds starting time.
- 5.04.02 Starting time mentioned above is at minimum permissible voltage of 80% rated voltage.
- 5.04.03 Hot thermal withstand curve shall have a margin of at least 10% over the full load current of the motor to permit relay setting utilising motor rated capacity.
- 6.00.00 **SPECIFIC REQUIREMENTS**
- 6.01.00 **Enclosure**
- 6.01.01 All motor enclosures for outdoor, semi-outdoor & indoor application shall conform to the degree of protection IP-55 unless otherwise specified. Motor for outdoor or semi-outdoor service shall be of weather-proof construction with canopy.
- 6.01.02 For hazardous area approved type of increased safety enclosure shall be furnished.
- 6.02.00 **Cooling**
- 6.02.01 The motor shall be self ventilated type, either totally enclosed fan cooled IC 411(TEFC), totally enclosed tube ventilated IC 511(TETV) or closed air circuit air- cooled IC 611(CACA).

- 6.02.02 For large capacity motors not available with above type of cooling may be accepted with IC 81W or IC 91W, closed air circuit water cooled (CACW) subject to the approval of the owner.
- 6.03.00 **Winding and Insulation**
- 6.03.01 All insulated winding shall be of copper.
- 6.03.02 All motors shall have class F insulation but limited to class B temperature rise.
- 6.03.03 Windings shall be impregnated to make them non-hygroscopic and oil resistant.
- 6.04.00 **Tropical Protection**
- 6.04.01 All motors shall have fungus protection involving special treatment of insulation and metal against fungus, insects and corrosion.
- 6.04.02 All fittings and hardwares shall be corrosion resistant.
- 6.05.00 **Bearings**
- 6.05.01 Motor shall be provided with antifriction bearings, unless sleeve bearings are required by the motor application. Bearings shall be rated for minimum service life of 40,000Hrs.
- 6.05.02 Vertical shaft motors shall be provided with thrust and guide bearings. Thrust bearing of tilting pad type is preferred.
- 6.05.03 Bearings shall be provided with seals to prevent leakage of lubricant or entrance of foreign matters like dirt, water etc. into the bearing area.
- 6.05.04 Sleeve bearings shall be split type, ring oiled, with permanently aligned, close running shaft sleeves.
- 6.05.05 Grease lubricated bearings shall be pre-lubricated and shall have provisions for in-service positive lubrication with drains to guard against over lubrication. LT motors 15kW and above shall be provided with external greasing arrangement.
- 6.05.06 Oiled bearing shall have an integral self cooled oil reservoir with oil ring inspection ports, oil sight glass with oil level marked for standstill and running conditions and oil fill and drain plugs.
- 6.05.07 Forced lubricated or water cooled bearing shall not be used without prior approval of Owner.
- 6.05.08 Lubricant shall not deteriorate under all service conditions. The lubricant shall be limited to normally available types with IOC equivalent.
- 6.05.09 Bearings shall be insulated as required to prevent shaft current and resultant bearing damage.
- 6.06.00 **Noise & Vibration**

- 6.06.01 All HT motors shall be provided with vibration pads for mounting of vibration detectors. Vibration monitoring devices shall be provided on DE and NDE side in x&y direction with remote DCS monitoring, alarm and tripping.
- 6.06.02 The maximum double amplitude vibrations for HT motors upto 1500 rpm shall be 25 microns and 15 microns upto 3000 rpm. For 415V motors, maximum double amplitude vibrations upto 1500 rpm shall be 40 microns and 15 microns upto 3000 rpm.
- 6.06.03 The noise level shall not exceed 85db (A) at 1.5 meters from the motor.
- 6.07.00 **Motor Terminal Box**
- 6.07.01 Motor terminal box shall be detachable type and located in accordance with Indian Standards clearing the motor base- plate/ foundation
- 6.07.02 Terminal box shall be capable of being turned 360 Deg. in steps of 180 Deg. for HT motors and 90 Deg. for LT motors unless otherwise approved.
- 6.07.03 The terminal box shall be split type with removable cover with access to connections and shall have the same degree of protection as motor.
- 6.07.04 The terminal box shall have sufficient space inside for termination/connection of XLPE insulated armoured aluminium cables.
- 6.07.05 Terminals shall be stud or lead wire type, substantially constructed and thoroughly insulated from the frame.
- 6.07.06 The terminals shall be clearly identified by phase markings, with corresponding direction of rotation marked on the non-driving end of the motor.
- 6.07.07 The terminal box shall be capable of withstanding maximum system fault current for a duration of 0.25 sec.
- 6.07.08 For 11000V and 3300V motor, the terminal box shall be phase-segregated type. The neutral leads shall be brought out in a separate terminal box (not necessarily phase segregated type) with shorting links for star connection.
- 6.07.09 Motor terminal box shall be furnished with suitable cable lugs and double compression brass glands to match with cable used.
- 6.07.10 The gland plate for single core cable shall be non-magnetic type.
- 6.07.11 Minimum clearances to be provided between phase to phase and phase to earth shall be as under-

Voltage Rating of Motor		Minimum Ph-Ph & Ph-Earth clearance
0.415 kV	:	25 mm
3.3 kV	:	65 mm
11.0 kV	:	140 mm

Note: In case it is not possible to maintain these clearances, the live parts shall be totally insulated from earth and other Phases. Adequate clearances shall be provided for cable connections.

6.08.00 Grounding

6.08.01 The frame of each motor shall be provided with two separate and distinct grounding pads complete with tapped hole, GI bolts and washer.

6.08.02 The grounding connection shall be suitable for accommodation of ground conductors as follows:

Rating		Conductor Size	
Above	Up to		
-----	5.5 kW	:	8 SWG GI Wires.
5.5 kW	22 kW	:	25mm X 4mm GS Flat.
23 kW	55 kW	:	40mm X 6mm GS Flat.
56kW	174kW	:	50mm X 8mm GS Flat.
175kW	ABOVE	:	75mm X 10mm GS Flat.

6.08.03 The cable terminal box shall have a separate grounding pad.

6.09.00 Minimum Cable Size for LT & HT Motors shall as be as follows-

a) For 415V, 3-Ph, LT Motors-

Rating		:	Cable Size
Above	Up to		
-----	5.5 kW	:	1R X 3C X 6 Sq.mm
5.5 kW	11 kW	:	1R X 3C X 10 Sq.mm
11 kW	22 kW	:	1R X 3C X 35 Sq.mm
22 kW	37.5 kW	:	1R X 3C X 70 Sq.mm.
37.5kW	55 kW	:	1R X 3C X 150 Sq.mm
55 kW	75 kW	:	1R X 3C X 300 Sq.mm
75 kW	110kW	:	2R X 3C X 150 Sq.mm
110 kW	175kW	:	2R X 3C X 300 Sq.mm

b) For 3.3kV & 11kV, 3-Ph, HT Motors-

Rating		:	Cable Size
Above	Up to		

175 kW	1000 kW	:	1R X 3C X 240 Sq.mm
1000 kW	2000 kW	:	2R X 3C X 240 Sq.mm
2000 kW	4500 kW	:	2R X 3C X 300 Sq.mm
4501 kW	10,000 kW	:	9R X 1C X 1000 Sq.mm.

Note: During detail engineering if higher cable size is required same shall be provided.

6.10.00 Rating Plate

In addition to the minimum information required by IS, the following information shall be shown on motor rating plate :

- a) Temperature rise in Deg.C under rated condition and method of measurement.
- b) Degree of protection.
- c) Bearing identification no. and recommended lubricant.
- d) Location of insulated bearings.

7.00.00 ACCESSORIES

7.01.00 General

Accessories shall be furnished, as listed below, or if otherwise required by driven equipment specification or application.

7.02.00 Space Heater

7.02.01 Motor of rating 30 kW and above shall be provided with space heaters, suitably located for easy removal or replacement.

7.02.02 The space heater shall be rated 240 V, 1 Phase, 50Hz and sized to maintain the motor internal temperature above dew point when the motor is idle.

7.02.03 Minimum Cable Size for space heater shall be as listed-

- i) For LT motors: 2.5 sq.mm, 2-Core copper cable complying with IS-1554(Part-1).
- ii) For HT motors: 6 sq.mm, 2 Core aluminium cable complying with IS-1554(Part-1).

7.03.00 Temperature Detectors

7.03.01 All 11000V and 3300V motors shall be provided with twelve (12) nos. simplex type winding temperature detectors, four (4) nos. per phase.

- 7.03.02 11000V and 3300V motor bearing shall be provided with duplex type temperature detectors.
- 7.03.03 The temperature detector mentioned above shall be resistance type, 3 wire, platinum wound, 100 Ohms at 0°C.
- 7.03.04 Leads of all simplex type motor winding RTDS and motor bearing RTDS shall be wired up to respective switchgear metering & protection compartment. From which one set of RTDS will be connected to numerical protection relay and another set shall be kept free for DDCMIS connectivity.
- 7.03.05 0.5 sq.mm annealed tinned copper conductor complying with IS-1554(Part-1). shall be used for RTD/BTD wiring.
- 7.04.00 **Indicator/Switch**
- 7.04.01 Dial type local indicator with alarm contacts shall be provided for the following:
- a) 11000 V and 3300V motor bearing temperature.
 - b) Hot and cold air temperature of the closed air circuit for CACA and CACW motor.
- 7.04.02 Flow switches shall be provided for monitoring cooling water flow of CACW motor and oil flow of forced lubrication bearing, if used. CACW motor shall be provided with water leakage detector with remote alarm and tripping.
- 7.04.03 Alarm switch contact rating shall be minimum 2.0 A at 220V D.C. and 10A at 240V A.C.
- 7.05.00 **Current Transformer for Differential Protection**
- 7.05.01 Motor 1000 kW and above shall be provided with three differential current transformers mounted over the neutral leads within the enclosure.
- 7.05.02 The arrangement shall be such as to permit easy access for C.T. testing and replacement. Current transformer characteristics shall match Owner's requirements to be intimated later.
- 7.06.00 **Accessory Terminal Box**
- 7.06.01 All accessory equipment such as space heater, temperature detector, current transformers etc., shall be wired to and terminated in terminal boxes, separate from and independent of motor (power) terminal box.
- 7.06.02 Accessory terminal box shall be complete with double compression brass glands and pressure type terminals to suit owner's cable connections.
- 7.07.00 **Drain Plug**
- Motor shall have drain plugs so located that they will drain the water, resulting from the condensation or other causes from all pockets of the motor casing.

7.08.00 Lifting Provisions

Motor weighing 25 Kg. or more shall be provided with eyebolt or other adequate provision of lifting.

7.09.00 Dowel Pins

The motor shall be designed to permit easy access for drilling holes through motor feet or mounting flange for installation of dowel pins after assembling the motor and driven equipment.

7.10.00 Painting

For paint shade finish, refer Section-X of Volume: II-A : Lead Specification.

8.00.00 TESTS

Routine and Type Tests are to be conducted in presence of customer's representative as per IS:325 and in addition, any special test called for in the driven equipment specification shall be performed and required copies of test certificates are to be furnished for approval. In addition, following tests shall have to be carried out on the motors in presence of OWNER's representative on 3.3kV/11kV motors.

- a. Impulse test by 1.2 / 50 micro sec. On sample coil of Stator winding insulation as type test as per IEC-60034, part -15 test voltages as under :

Voltage rating of motor	Impulse Test Voltage
3.3 kV	18 kV peak
11 kV	49 kV peak

- b. Tan delta, charging current and dielectric loss measurements on each phase of motor stator winding as routine test.
- c. Polarization Index Test as per IS: 7816 as routine test
- d. Test for suitability of IPW- 55(Weather proof) as per IS 4691 as type test. Type test certificate for first numeral shall be acceptable in lieu to test, provided the test motor is identical to motor being supplied. Second numeral test shall be carried out on one motor of each type and rating.
- e. Fault Withstand Test for main terminal box as type test. Type test certificate shall be acceptable, if the test is conducted on exactly identical terminal box.
- f. Test for noise level as routine test.
- g. Test for vibration as routine test.

- h. Tan delta measurement on coils.
- i. Surge withstand test for inter turn insulation.
- j. Test to diagnose rotor bar failure during manufacture.
- k. Over speed test as routine test.
- l. Temperature rise test.

Temperature rise under normal condition above ambient temperature shall be limited to-

Specified Design Ambient temperature	Thermometer Method	Resistance Method
50 deg.C	60 deg.C	70 deg.C
45 deg.C	65 deg.C	75 deg.C
40 deg.C	70 deg.C	80 deg.C

Tests indicated at (h), (i), (j) shall be carried out during manufacture of the coils and shall be furnished for verification.

9.00.00 DRAWINGS, DATA & MANUALS

9.01.00 Drawings, Data & Manuals shall be submitted in triplicate with the bid and in quantities and procedures as specified in General Conditions of Contract and/or elsewhere in the specification for approval and subsequent distribution after the issue of 'Letter of Intent'.

9.02.00 To be Submitted with the bid

- a) List of the motors
- b) Individual motor data sheet as per format of the proposal data sheets.
- c) Scheme & write-up on forced lubrication system, if any
- d) Type test report

9.03.00 To be submitted for Owner / Purchaser's Approval and Distribution

All relevant drawings and data pertaining to the equipment like GTP, GA drawing, foundation plan, QAP, etc. shall be submitted by the Bidder for approval of Owner/Owner's consultant. Also refer clause no. 1.19.02(u) of Section-I of Volume – V-A: Technical Specifications for Electrical Equipment & Accessories.

ANNEXURE-A

DESIGN DATA

1.0 AUXILIARY POWER SUPPLY

Supply	Description	Consumer
H.V. Supply	11000 V, 3Ø, 3W, 50 Hz, Non-effectively earthed Fault level 44 kA symm. for 1 sec.	Motors 1500 kW & above
M.V. Supply	3300 V, 3Ø, 3W, 50 Hz, Non-effectively earthed Fault level 40 kA symm. for 1 sec.	Motors 175 kW and Up to less than 1500 kW.
L.V. Supply (i)	415V, 3Ø, 3W, 50 Hz effectively earthed Fault level 50 kA symm. for 1 sec.	Motors above 0.2kW and below 175kW.
(ii)	240V AC/415V AC 240V, 1Ø, 2W, 50 Hz effectively earthed	Motors upto 0.2kW. Lighting, Space heat- ing , A.C supply for Contr- ol & protective devices.
D.C. Supply	220V, 2W, unearthed Fault level 25* kA. for 1 sec.	D.C. alarm, control & protective devices

* Indicative only, the actual value will be decided by the Bidder, after substantiating the same by calculation.

Note-

- 415V or 3.3 kV may be adopted by the bidder for the drives in the range of 160-210 kW.
- 3.3 kV AC supply for CHP conveyor motors of rating above 160 kW is to be used.
- The voltage rating of the drives indicated above is for basic guideline. Minor variations can be accepted on case to case basis based on techno-economic considerations of the various sub-systems.
- Voltage rating for special purpose motors viz, VFD and screw compressors, shall be as per manufacturer's standard. All the motors ratings on Stacker/ reclaimer shall be 415V ac supply only.

2.0 RANGE OF VARIATION

A.C. Supply :

Voltage	:	$\pm 10\%$
Frequency	:	+3% to -5%
Combined Volt + frequency	:	10% (absolute sum)

During starting of large motor, the voltage may drop to 80% of the rated voltage for a period of 60 seconds. All electrical equipment while running shall successfully ride over such period without affecting system performance.

D.C. Supply :

Voltage	:	187 to 242 Volt
---------	---	-----------------

SECTION-IV

TECHNICAL SPECIFICATION FOR CABLES

1.00.00 **SCOPE OF SUPPLY**

1.01.00 Power and Control Cables shall cover the requirement of entire Plant including the switchyard.

Other cables including special cables, if any, which may be necessary as per proven engineering practice for satisfactory and trouble free operation of the entire cable system of the plant shall also be within the scope of supply. These shall include all such cables for electrical integral with mechanical equipment systems and subsystems.

1.02.00 Cable shall be furnished in accordance with this specification and the following annexures :

- a) 11kV & 3.3 kV Power cables : Annexure - A
- b) 1100V Power Cables : Annexure – B
- c) Control Cables : Annexure – C
- d) Fire Survival Cables : Annexure – D
- e) Flexible Trailing cable : Annexure – E

1.03.00 All relevant drawings, data and instruction manuals

2.00.00 **CODES & STANDARDS**

2.01.00 All cable and materials shall be designed, manufactured and tested in accordance with the latest applicable Indian Standards (IS) and IEC except where modified and/or supplemented by this specification.

2.02.00 Cable and material conforming to any other standard which ensures equal or better quality, may be accepted. In such case, copies of the English version of the standard adopted shall be submitted along with the bid.

2.03.00 The electrical installation shall meet the requirements of Indian Electricity Rules as amended upto date and relevant IS Code of Practice. In addition, other rules and regulations applicable to the work shall be followed.

3.00.00 **DESIGN CRITERIA**

3.01.00 Cables will be generally laid on ladder type trays or drawn through rigid PVC/GI /HDPE pipe/conduits. Cable tunnels shall be avoided as far as possible, except at locations where overhead trays are not possible, with prior approval of the Owner.

- 3.02.00 For continuous operation at specified rating, maximum conductor temperature shall be limited to the permissible value as per relevant standard and/or this specification which one is more stringent.
- 3.03.00 The insulation and sheath materials shall be resistant to oil, acid and alkali and shall be tough enough to withstand mechanical stresses during handling.
- 3.04.00 Armouring shall be single round wire of galvanized steel for multicore cables and aluminum for single core cable for power and control cables. For fire survival control cable, the armouring over inner sheath shall consist of single layer of wire / round galvanised steel wire as per IS 3975 amended upto date. For Fire survival power cable, Single core cables to be used in A.C. system, the armouring over inner sheath shall consist of single layer of round copper wire, for multi-core cables to be used in A.C. system and single core cables in D.C. System, the armouring over inner sheath shall consist of single layer of round galvanised steel wire.
- 3.05.00 The outer sheath shall have flame retardant low smoke halogen evolution (FRLSH) characteristics or fire survival characteristics as applicable and shall meet the requirements of additional tests specified for the purpose.
- 3.06.00 Core identification for multicore cable shall be provided by colour coding.
- 3.07.00 HT cables shall be manufactured by triple extrusion dry cured (CCV) process using pressurized nitrogen.
- 4.00.00 **SPECIFIC REQUIREMENTS**
- 4.01.00 **General Description**
- All Cables shall be furnished in strict compliance with ratings and requirements and sizes as given in Annexures to this Specification.
- 4.02.00 **Drum Length and Tolerance**
- The cables shall be supplied in non-returnable packing steel drum for 11 kV & 3.3 kV power cables, wooden drums for 1100V power and control cables, each containing minimum 500 meters length of larger sizes of cable unless specifically asked for. For smaller sizes of cables, each drum shall contain 1000 meters length of cable. Allowable tolerance on individual drum length is $\pm 5\%$.
- 4.03.00 **Non-Standard Length**
- Non-standard lengths upto 5% of the total ordered quantity may be accepted. However the Contractor will be required to obtain approval before packing the Cables on drums. Non-standard lengths shall not be less than 100 metres in any case.
- 4.04.00 **Cable identification**

Cable identification shall be provided by embossing on every meter on the outer sheath the following :

- a) TSGENCO
- b) Manufacturer's name or trade mark
- c) Voltage grade
- d) Year of manufacture
- e) Type of insulation, e.g. XLPE/PVC/HR85/IE2 etc.
- f) No. of core and size of cables.
- g) Type of improved fire performance, e.g. FR/FRLSH/FS
- h) IS number

4.05.00 **Packing**

4.05.01 Cables shall be supplied in non returnable drums. The drums shall be of heavy construction. All wooden parts shall be manufactured from seasoned wood. All ferrous parts used shall be treated with suitable rust preventive finish or coating to avoid rusting during transit or storage. Wooden cable drum shall be treated by immersing in copper-nitrate solution.

4.05.02 Cable shall be wound and packed on drums in such a manner that it will be properly sealed and firmly secured to the drum. The ends of each length shall be sealed before shipment.

4.05.03 The cable drums should carry the following details in printed form:

- a) TSGENCO
- b) Manufacturer's name or trade make
- c) Type of cable & voltage grade
- d) Year of manufacture
- e) Type of insulation e.g. XLPE/HRPVC/IE2
- f) No. of core and size of cables
- g) Cable code e.g. FRLSH/FS
- h) Length of cable on drum
- i) No. of length on drum, if more than one
- j) Direction of rotation, by arrow
- k) Approx. gross mass.

- l) IS/IEC number and ISI mark

4.06.00 **Joints and Terminations**

Materials of construction for a joint/termination shall perfectly match with the dielectric chemical and physical characteristics of the associated cables. The material and design concepts shall incorporate a high degree of operating compatibility between the cable and joints. The protective outer covering (jacket) used on the joints/terminations shall have the same qualities as that of the cable outer sheath in terms of ambient/operating temperature withstand capability and resistance to hazardous environments and corrosive elements. Straight through joints and terminations for HT cables shall be heat shrinkable type.

4.07.00 **Selection Criteria**

- 4.07.01 a) HT and LT power cables shall be selected on the basis of current carrying capacity, short circuit rating and permissible voltage drop.
- b) While sizing power cables, following aspects shall be reckoned:
- i) Ground/Ambient Air temperature
 - ii) Depth of Laying.
 - iii) Power Cables touching each other.
- c) Cables, for circuit breaker controlled feeders, shall withstand the short circuit current for the fault clearing time 0.16 Sec. for outgoing feeder, 0.5 Sec. for Tie feeder and 1.0 Sec. for Incomer.
- d) HT cables shall be sized based on the following considerations:
- Rated current of the equipment and ground/ambient temperature.
- Touching/spacing of cable.
- Laying on multi-tier racks, trench
- Depth of laying.
- The voltage drop of the cable , during motor starting condition , shall be limited to 15% and during full load running condition shall be limited to 3 % rated voltage. For BFP motor, the voltage drop during motor starting condition shall be limited to 20% and for Mill motor shall be limited to 10%. Other outgoing feeder / transformer feeder shall be limited to 3% rated voltage.
- Short circuits withstand capability
- e) For fuse/MCCB/Breaker protected circuits the conductor size shall depend upon full load current subject to voltage drop limited to 3% during running of all feeders and 15% during starting for motor feeders. In addition, transformer regulation shall also be considered for loads fed from 415V PMCC. Incase of other out going line feeder voltage drop shall be limited to 3%.

- f) For loads fed from local panels, the total running voltage drop in cable from 415V PMCC to local panel and from local panel to individual motor shall be limited to 3% at full load motor current while the same during starting shall be limited to 15%.
- g) As per national electric code (NEC) current rating capacity of motor feeder/cables should be 125% of full load current.
- h) For welding receptacle, 3% running drop shall only be considered.
- The minimum sizes of L.T cable to be chosen are as below:
- AL - 16 mm² (3 core) & 16mm² (2 core) Cu - 2.5 mm²
- 4.07.02 Apart from above, consideration shall also be given to limit the cable to some standard sizes instead of using too many types.
- 4.07.03 The standard cable sizes, amp capacities, derating factors. as given in IS/IEC will be generally followed.
- 4.07.04 a) For breaker protected circuits minimum size of the cable shall be as follows:
- | | | |
|--------------------|---|-------------------|
| 1100V Power Cable | : | 240 Sq mm XLPE AL |
| 3300V Power Cable | : | 185 Sq mm XLPE AL |
| 11000V Power Cable | : | 240 Sq mm XLPE AL |
- b) For motor circuits the selection of size will be made ensuring that the cable shall withstand a short circuit fault directly following a second hot start.
- 4.07.05 For fuse/MCCB protected circuit, the conductor size will depend on full load current subject to voltage drop not exceeding 3%. For practical purposes, the minimum size chosen is as below :
- | | | |
|--------------|---|------------|
| a) Aluminium | : | 6 Sq mm. |
| b) Copper | : | 2.5 Sq mm. |
- 4.07.06 All control cables shall be 2.5 Sq mm copper cable.
- 4.07.07 Multicore control cables will generally have spare conductor (s) in accordance with the following chart :

Conductors required	Cables
1 or 2	1-3/C
3 or 4	1-5/C
5 or 6	1-7/C
7 or 8	1-9/C

	9 or 10	1-12/C
	Above 10	Two or more of above cables
4.07.08	Separate cables for each type of following services/functions as applicable shall be used for each feeder. Same multicore cable using different services shall not be acceptable.	
	a) Power. b) Control, interlock and indication. c) Metering and measuring. d) Alarm and annunciation. e) C.T. Cables. f) V.T. Cables.	
4.08.00	Cable Identification Cable identification shall be provided by embossing on the outer sheath the following : a) Manufacturer's name or trade mark b) Manufacturer's name or trade mark c) Voltage grade d) Year of manufacture e) Type of insulation, e.g. XLPE, HRPVC & IE2 etc. f) No. of core & size of cables g) Type of outer sheath e.g. FRLSH, FS etc.	
4.09.00	Selected sizes of power and control cables are given in Annexure-G.	
4.10.00	Fire Survival Cables shall be used for important auxiliaries / area as recommended in Standard Technical Specification by CEA for the following services. The fire survival time of these cables shall not be less than 3 hours at 750 deg. C. i. DC emergency lube oil pump ii. DC hydrogen seal pump iii. Turbine lube oil pump/barring gear iv. DC emergency lighting for main building and service building v. DC cables for battery to charger & DC distribution boards	

- vi. Jacking oil pump
- vii. Emergency turbine trip in control room
- viii. Boiler Turbine : Generator inter trip which include the interconnection between
 - Boiler master fuel trip and turbine trip relays
 - Generator trip relays & turbine trip relays
 - Generator trip relays & generator breaker
 - Generator trip relays & field breaker
 - Generator trip relays & unit auxiliary transformer breaker
 - Incomer cables for DG board, emergency board, DC lighting board etc.

5.00.00 **TESTS**

5.01.00 **Shop Tests**

The Cables shall be subject to shop tests in accordance relevant IS/IEC standards to prove the design and general qualities of the Cables as below:

- 5.01.01 Routine tests on each drum of cables.
- 5.01.02 Acceptance Tests on 1 drum out of every 10 drums chosen at random for acceptance of the lot for every size.
- 5.01.03 Type test on each type and size of cable, inclusive of measurement of armour DC resistance of power cables on one drum out of every 10 drums of cable.

5.02.00 **Additional Tests**

Following additional acceptance tests shall also be performed on each type of cables having outer sheath with improved fire performance (category C1, Type FR/ Category C2, Type FRLSH)

- 5.02.01 Oxygen index test (both C1 & C2)

The Oxygen index shall not be less than 29.
- 5.02.02 Temperature Index Test (both C1 & C2)

The measured value of temperature index shall be 21 at a temperature of 250°C for FRLS cables and 350°C for FS cables
- 5.02.03 Flame Retardance test on single cable and on bunched cables (both C1 & C2)

After the test, there should be no visible damages on the test specimen within 300mm from its upper end.

After burning has ceased, the cables should be wiped clean and the charred or affected portion should not have reached a height exceeding 2.5 meter above the bottom edge of the burner, measured at the front and rear of the cable assembly. 3 Hours fire rating test shall be carried out for FS cable as per IEC-331

5.02.04 Halogen acid gas evolution test (for Category C2)

The level of HCL evolved shall not exceed 20 per cent by weight. HCL evolved shall not be exceed 2% for FS cable.

5.02.05 Smoke density test (for Category C2)

The cables shall meet the requirements of light transmission of minimum 40% after the test. Minimum transmission shall be 80% for FS cable.

5.02.06 Test for specific optical density of smoke

The cables shall meet the requirements of IS/IEC.

5.02.07 Test for rodent & termite repulsion property

The test shall be carried out to note the presence of rodent and termite repelling chemical in PVC compound. Normal procedure is that a few chippings of the PVC compound are slowly ignited in a porcelain dish or crucible in a muffle furnace at about 600°C. The resulting ignited ash is boiled with a little ammonium acetate solution (10%). A drop of aqueous sodium sulphide solution is placed on a thick filter paper and it is allowed to soak. The spot is touched with a drop of above extract. A black spot indicates the presence of anti-termite & rodent compound.

Flammability test shall be carried on finished cables as per following standards-

- a) Swedish Chimney test – SS: 424-14-75
- b) IEEE std.383 – 1974 latest
- c) IEC std. 332-1, 332-3 and IEC 331

6.00.00 **DRAWINGS, DATA & MANUALS**

6.01.00 Drawings, Data and Manuals shall be submitted with the bid and for approval/reference and subsequent distribution after the issue of Letter of Intent in quantities and procedures as specified in General condition of contract and/or

6.02.00 **To be submitted with the Bid**

- a) Manufacturer's catalogues giving cable construction details and characteristics.

- b) Cable current ratings for different types of installation, inclusive of derating factors for ambient temperature, grouping etc.
- c) Write-up on Manufacturer's recommended method of splicing, jointing, termination etc. of the cables.
- d) Type test reports on 11 KV & 3.3 KV Power, LT FRLSH Power & control, FS power and control cables.
- e) Filled-up proposal particulars.

6.03.00 To be submitted for Owner/Purchaser's Approval and Distribution

All relevant drawings and data pertaining to the equipment like GTP, QAP, etc. shall be submitted by the Bidder for the approval of Owner/Owner's consultant. Also refer clause no. 1.19.02(u) of Section-I of Volume – V-A: Technical Specifications for Electrical Equipment & Accessories.

ANNEXURE-A

**RATINGS AND REQUIREMENTS
HV POWER CABLES (11 KV & 3.3 KV)**

- 1.0 11000/11000V & 3300/3300V grade 90°C continuous rating under normal condition and 250°C rating under short circuit condition heavy duty XLPE power cable suitable for use in 11000V/3300V non-effectively earthed system conforming to following requirement and in line with IS-7098, IS-8130, IS-5831 & IS-3975, manufactured by Triple Extrusion Dry Cure (CCV) process using pressurized Nitrogen.
- 1.1 Conductor : Stranded and compacted aluminium conductor of grade H2 & class 2 for all sizes, generally conforming to IS: 8130.
- 1.2 Conductor Screen : Extruded semi-conducting compound.
- 1.3 Insulation : Extruded cross linked polyethylene (XLPE) conforming to IS: 7098 (Part-2)
- 1.4 Insulation Screen : Extruded semi-conducting compound with a layer of non-magnetic metallic tape. For single core armoured cables, the armouring shall constitute the metallic part of screening. The semi-conducting tape shall be easily strippable.
- 1.5 Core Identification : By coloured strips applied on (For three core cables) cores.
- 1.6 Inner Sheath : Extruded HRPVC/FRLS compound conforming to type ST2 of IS: 5831 for three core cables. Single core cables shall have inner sheath. Filler material shall also be of type ST2 PVC.
- 1.7 Armour : Galvanised single round steel wire armour for twin and multicore cables.

Non-magnetic hard drawn aluminum single round wire conforming to H4 of IS-8130 latest for single core cables
- 1.8 Overall Sheath : Extruded FRLSH HRPVC compound conforming to type ST2 of IS: 5831.
- 1.9 Drum : Steel Drum

ANNEXURE-B

**RATINGS AND REQUIREMENTS
LV POWER CABLES [1.1KV (XLPE TYPE)]**

- 1.0 1100 V grade, 90°C continuous rating under normal condition and 250°C under short circuit condition rating, XLPE heavy duty, power cable conforming to following requirement and in line with IS 7098 Part-I. IS 8130 & IS 5831 and IS 3975.
- 1.1 Conductor : Stranded and compacted plain aluminium of grade H2 and class 2 stranded, high conductivity annealed plain copper for cable sizes upto 2.5 mm² conforming to IS:8130.
- 1.2 Insulation : Extruded cross-linked polyethylene (XLPE) conforming to IS: 7098 (Part-1)
- 1.3 Core Identification : By color coding
- 1.4 Inner Sheath : Extruded HRPVC FRLS compound conforming to type ST2 of IS: 5831 for multicore cable. Single core cables shall have no inner sheath. Filler shall be of same material as of inner sheath i.e. ST2
- 1.5 Armour : Galvanized single round steel wire armour for twin and multicore cables.

Non-magnetic hard drawn aluminum single round wire conforming to H4 of IS-8130 latest for single core cables
- 1.6 Overall Sheath : Extruded FRLSH HRPVC compound conforming to type ST2 of IS: 5831.
- 1.7 Drum : Conforming to IS-10418 (Wooden drum)

ANNEXURE-C

**RATINGS AND REQUIREMENTS
CONTROL CABLES**

- 1.0 1100 V grade 85°C continuous rating under normal condition and 160°C under short circuit condition rating HRPVC Control cable (YWW) conforming to following requirement and in line with IS:1554, IS:8130, IS:5831 and IS:3975.
- 1.1 Conductor : Stranded, non-compacted & circular, high conductivity annealed plain copper, generally conforming to IS: 8130.
- 1.2 Insulation : Extruded HRPVC type-C compound conforming to IS: 5831. The minimum volume resistivity of insulation shall be 3.5×10^{14} ohm-cm at 27°C and 3.5×10^{11} OHM-CM at 85°C.
- 1.3 Core Identification : By color coding and numbering at interval of 100mm or less
- 1.4 Inner sheath : Extruded HRPVC compound conforming to type ST2 FRLS of IS: 5831 for multicore cables. Single core cables shall have no inner sheath. Filler shall be of same material as of inner sheath i.e. ST2.
- 1.5 Armour : Galvanised single round steel wire for twin and multicore cables.
- 1.6 Overall sheath : Extruded FRLSH HRPVC compound conforming to type ST2 of IS: 5831.
- 1.7 Drum : Conforming to IS: 10418 (Wooden drum)

ANNEXURE-D

**RATINGS AND REQUIREMENTS
(1.1KV GRADE COPPER CONDUCTOR FS POWER CABLES)**

1100 V, copper conductor, heat resisting insulation, extruded inner sheath of low smoke and very low halogen content fire resisting material, single layer of copper wire armour for single core/ single layer of round galvanised steel wire for multicore, outer sheath of low smoke and very low halogen content fire resistant material, suitable for minimum temperature of 750 deg.C for 3 hours. The cables shall be in compliance with IEC-60331, Part 11.

**RATINGS AND REQUIREMENTS
(1.1KV GRADE COPPER CONDUCTOR FS CONTROL CABLES)**

1100 V, copper conductor, heat resisting insulation, extruded inner sheath of low smoke and very low halogen content fire resisting material, single layer of copper wire armour for single core/ single layer of round galvanised steel wire for multicore, outer sheath of low smoke and very low halogen content fire resistant material, suitable for minimum temperature of 750 deg.C for 3 hours. The cables shall be in compliance with IEC-60331, Part 11.

ANNEXURE-E

**RATINGS AND REQUIREMENTS
FLEXIBLE TRAILING CABLES**

- i) 3300 V Unearthed Grade

Flexible trailing cable, annealed plain copper conductor, Class-5 of IS-8130, insulated with EPR, conductor and insulation shielded with EPR, cores screened with ATC wire braiding, cores laid up, HD CSP inner sheathed, proof cotton taped and FRLS HD CSP sheathed overall, conforming to IS:9968. Alternatively PCP sheathing may be acceptable.

- ii) 1100 V Grade

1100 V Grade trailing cable shall be plain copper of Class-5 of IS-8130, heat resistant elastomeric compound based on EPR insulation, inner sheath of heat resistant elastomeric compound PCP sheath, nylon cord reinforcement and heat resistant, oil resistant and flame retardant heavy duty elastomeric compound FRLS CSP outer sheath.

ANNEXURE-F

CABLE SIZES

Following sizes are given as a general guideline. Standard sizes as per IEC/IS shall be adopted.

Sl. No.	Cable Size	Conductor	Insulation
1.0	H. T. CABLES (11kV)		
1.1	1 core 1000 sq.mm	AL	XLPE (FRLS)
1.1	1 core 630 Sq.mm	AL	XLPE (FRLS)
1.2	3 core 400 Sq.mm	AL	XLPE (FRLS)
1.3	3 core 240 Sq.mm	AL	XLPE (FRLS)
1.4	1 core 70 Sq.mm	AL	XLPE (FRLS)
1.0	H. T. CABLES (3.3kV)		
1.1	1 core 630 Sq.mm	AL	XLPE (FRLS)
1.2	3 core 300 Sq.mm	AL	XLPE (FRLS)
1.3	3 core 240 Sq.mm	AL	XLPE (FRLS)
1.4	3 core 185 Sq.mm	AL	XLPE (FRLS)
1.5	1 core 70 Sq.mm	AL	XLPE (FRLS)
2.0	L. T. POWER CABLES		
2.1	3 core 2.5 Sq.mm	CU	XLPE (FRLS)
2.2	2 core 16 Sq.mm	AL	XLPE (FRLS)
2.3	3 core 16 Sq.mm	AL	XLPE (FRLS)
2.4	4 core 16 Sq.mm	AL	XLPE (FRLS)
2.5	2 core 35 Sq.mm	AL	XLPE (FRLS)
2.6	3 core 35 Sq.mm	AL	XLPE (FRLS)
2.7	4 core 35 Sq.mm	AL	XLPE (FRLS)
2.8	3 core 70 Sq.mm	AL	XLPE (FRLS)

Sl. No.	Cable Size	Conductor	Insulation
2.9	3.1/2 core 70 Sq.mm	AL	XLPE (FRLS)
2.10	3 core 95 Sq.mm	AL	XLPE (FRLS)
2.11	3.1/2 core 95 Sq.mm	AL	XLPE (FRLS)
2.12	3 core 185 Sq.mm	AL	XLPE (FRLS)
2.13	3.1/2 core 185 Sq.mm	AL	XLPE (FRLS)
2.14	3 core 240 Sq.mm	AL	XLPE (FRLS)
2.15	3.1/2 core 240 Sq.mm	AL	XLPE (FRLS)
2.16	3 core 300 Sq.mm	AL	XLPE (FRLS)
2.17	3.1/2 core 300 Sq.mm	AL	XLPE (FRLS)
2.18	1 core 630 Sq.mm	AL	XLPE (FRLS)
3.0	CONTROL CABLE		
3.1	2 core 2.5 Sq.mm	CU	HRPVC (FRLS)
3.2	3 core 2.5 Sq.mm	CU	HRPVC (FRLS)
3.3	5 core 2.5 Sq.mm	CU	HRPVC (FRLS)
3.4	7 core 2.5 Sq.mm	CU	HRPVC (FRLS)
3.5	9 core 2.5 Sq.mm	CU	HRPVC (FRLS)
3.6	12 core 2.5 Sq.mm	CU	HRPVC (FRLS)
3.7	20 core 2.5 Sq.mm	CU	HRPVC (FRLS)
4.0	FS POWER CABLES		
4.1	3 core 2.5 Sq.mm	CU	EPR
4.2	2 core 16 Sq.mm	CU	EPR
4.3	3 core 16 Sq.mm	CU	EPR
4.4	4 core 16 Sq.mm	CU	EPR
4.5	2 core 35 Sq.mm	CU	EPR

Sl. No.	Cable Size	Conductor	Insulation
4.6	3 core 35 Sq.mm	CU	EPR
4.7	4 core 35 Sq.mm	CU	EPR
4.8	3 core 95 Sq.mm	CU	EPR
4.9	3.1/2 core 95 Sq.mm	CU	EPR
5.0	FS CONTROL CABLE		
5.1	2 core 2.5 Sq.mm	CU	EPR
5.2	3 core 2.5 Sq.mm	CU	EPR
5.3	5 core 2.5 Sq.mm	CU	EPR
5.4	7 core 2.5 Sq.mm	CU	EPR
5.5	9 core 2.5 Sq.mm	CU	EPR
5.6	12 core 2.5 Sq.mm	CU	EPR



TITLE

**1X800 MW KOTHAGUDEM TPS
SINGLE GIRDER EOT CRANES
ANNEXURE**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME: II B

REV 00

Section C4

30.07.2015

VOLUME - IIB

SECTION – C4

ANNEXURES



TITLE AMENDMENT-1
 TECHNICAL SPECIFICATION FOR
 SINGLE GIRDER CRANE
 1X800 MW KOTHAGUDEM TPS

SPECIFICATION NO. PE-TS-410-524-A001 (Amd.-1)

VOLUME II B

SECTION C-4

REV 00

DATE 19-09-15

SHEET 1 OF 1

ANNEXURE I SCOPE OF SINGLE GIRDER CRANE

Sl. No	Area / Equipment description	Qty. (nos.)	Capacity (T)	Span (m)	Lift (m)	Travel (m)	Type of crane
1	Compressor House	1	8T	9.3	5.7	33.0	Underslung
2	Permanent Store	1	10T	17.4	6.5	75.0	Overhead
3	Fire Water PH	1	5T	6.3	5	32	Underslung
4	Clarified Water PH	1	6T	5.8	15.5	24	Underslung
5	DG Building	1	10T	12.15	5.8	17.3	Underslung
6	Raw Water PH	1	6T	5.8	19	13.0	Underslung
7	RWPH Screen & Gate Handling	1	5T	5	16.5	13.0	Semi-gantry
8	CWPH Screen & Gate Handling	1	8T	7.5	13.8	39.25	Semi-gantry



**TECHNICAL SPECIFICATION FOR
FOR S/G CRANE
1X800 MW KOTHAGUDEM TPP**

DOC. NO. PE-TS-410-524-A001

REV. 0

DATE 30/07/2015

Annexure II

PAINTING SPECIFICATION

Surface preparation: De greasing and Mechanical cleaning with wire brush or hand tool. (SA 1/ ST 2 / ST 3 as applicable)

Primer : Red oxide Zinc chromate as per IS: 2074 (Alkyd medium) - 1 coat, DFT35 μ per coat.

Intermediate : Red oxide Zinc chromate as per IS: 2074 (Alkyd medium) - 1 coat, DFT35 μ per coat

Finish Coat : Synthetic enamel (Alkyd medium) as per IS: 2932- 2 coats, DFT 25 μ per coat.

Total DFT : 120 μ

Electrical /Control Panel:

Surface preparation: Seven tank process

Primer : Zinc phosphate (Alkyd medium) - 2 coat Minimum DFT 25- 35 μ per coat.

Finish Coat : Synthetic enamel (Alkyd medium) as per IS: 2932- 3 coats, Minimum DFT 20-25 μ per coat.

Total DFT : 110 - 145 μ

Color Shade:

SL. No	Item Description	Color Shade	Remarks
1	Structure	Smoke Gray shade 692 as per IS-5	
2	Bottom block assembly	Smoke Gray shade 692 as per IS-5	
3	Hooks	Lemon yellow shade 356 as per IS-5	With black zebra strip
4	End carriage sweep	Smoke Gray shade 692 as per IS-5	
5	Motors	Smoke Gray shade 692 as per IS-5	
6	Control Panels	Smoke Gray shade 692 as per IS-5	

SUB-VENDOR LIST – SINGLE GIRDER CRANES

ANNEXURE-III

SR. NO.	ITEM	SUPPLIERS	PLACE	REMARKS
1.	STEEL	SAIL		
		TISCO		
		JINDAL		
		ESSAR		
2.	HOOKS	STEEL FORGING & ENGG. CO.,	KOLKATA	
		SIMRITI FORGING		
		KARACHIWALA		UP TO 25T CAPACITY
3.	GEAR COUPLINGS	ALLIANCE		
		FLEX-TRANS (formerly known as HICLIFF)		
		SAHARA		
		NUTECH		
		OEM		
4.	WIRE ROPE	USHA MARTIN		
		FORT WILLIAMS		
		BHARAT WIRE ROPES		
5.	BEARINGS	SKF		
		FAG		
		TATA		
		NBC		
6.	MOTORS	SIEMENS		
		NGEF (up to 15KW)		
		CROMPTON		
		KIRLOSKAR		
		BHARAT BIJLI		
		MARATHON		
		ABB		
		LHP		
7.	BRAKES	ELECTROMAG		
		SPEED-O- CONTROL		
		BCH		FOR DCEM BRAKES ONLY
		KAKKU		
8.	CONTACTOR	SIEMENS		
		L&T		
		SCHNEIDER (Earlier TELE MECHANIQUE)		
		BCH		
9.	OVER LOAD RELAYS	SIEMENS		
		L&T		
		ABB		
		SCHNEIDER (Earlier TELE MACHANIQUE)		
10.	HRC FUSES	SIEMENS		
		L&T		
		ENGLISH ELECTRIC		
		GE POWER		
		EATON (BUSSMANN)		
		ABB		
11.	ISOLATING SWITCH	SIEMENS		

SUB-VENDOR LIST – SINGLE GIRDER CRANES

ANNEXURE-III

SR. NO.	ITEM	SUPPLIERS	PLACE	REMARKS
		L&T		
		CONTROL & SWITCH GEAR		
		ABB		
12.	SWITCH FUSE UNITS	SIEMENS		
		L&T		
		CONTROL & SWITCH GEAR	-	
		ABB		
13.	TIME DELAY RELAYS	SIEMENS		
		L&T		
		ABB		
		BCH		
		SCHNEIDER (Earlier TELE MACHANIQUE)		
14.	TRANSFORMERS	INDCOIL		
		LOGICSTAT		
		KAPPA		
		AUTOMATIC ELECTRIC		
		PRECISE ELECTRICALS		
		SILKAAN ELECTRIC MFG. CO. LTD.		
		SOUTHERN ELECTRIC		
		NEC		
15.	CABLE LUGS (HEAVY DUTY)	DOWELLS		
		UML ENGINEERS	KOLKATA	
		JAINSON		
16.	PVC POWER CABLES	APAR INDUSTRIES LTD.	MUMBAI	
		CORDS CABLE INDUSTRIES LTD.	NEW DELHI	
		DIAMOND POWER INFRASTRUCTURE LTD	VADODARA	
		GOYOLENE FIBRES (INDIA) PVT.LTD	MUMBAI	
		GOVIND CABLE INDUSTRIES	KOLKATA	
		GUPTA POWER INFRASTRUCTURE LIMITED	BHUBNESWAR	
		HAVELLS INDIA LIMITED	NOIDA	
		KEI INDUSTRIES LTD.	NEW DELHI	
		KRISHNA ELECTRICAL INDUSTRIES LTD	GWALIOR	
		KEC INTERNATIONAL LIMITED	MUMBAI	
		MANSFIELD CABLES COMPANY LTD.	NOIDA	
		NICCO CORPORATION LTD.	KOLKATA	
		PARAMOUNT COMMUNICATIONS LTD.	NEW DELHI	
		POLYCAB WIRES PVT. LTD.	MUMBAI	
		RADIANT CORPORATION PRIVATE LIMITED	HYDERABAD	
		RAVIN CABLES LIMITED	MUMBAI	
		SUYOG ELECTRICALS LTD.	VADODARA	

SUB-VENDOR LIST – SINGLE GIRDER CRANES

ANNEXURE-III

SR. NO.	ITEM	SUPPLIERS	PLACE	REMARKS
		SRIRAM CABLES PVT. LTD.	NEW DELHI	
		SCOT INNOVATION WIRES AND CABLES PVT. LTD.	SOLAN	
		SAM CABLES & CONDUCTORS (P) LTD	UDHAM SINGH NAGAR	
		THERMO CABLES LTD	HYDERABAD	
		ADVANCE CABLE TECHNOLOGIES (P) LTD	BANGALORE	
		APAR INDUSTRIES LTD., CMI LTD	MUMBAI	
		CMI LIMITED	FARIDABAD	
		CORDS CABLE INDUSTRIES LTD	NEW DELHI	
		CRYSTAL CABLE INDUSTRIES LTD	KOLKATA	
		DELTON CABLES LTD	NEW DELHI	
		DIAMOND POWER INFRASTRUCTURE LTD	VADODARA	
		ELKAY TELELINKS LTD	NEW DELHI	
		GEMSCAB INDUSTRIES LTD	NEW DELHI	
		GOVIND CABLE INDUSTRIES	KOLKATA	
		GUPTA POWER INFRASTRUCTURE LIMITED	BHUBNESWAR	
		HAVELLS INDIA LIMITED	NOIDA	
		INCOM CABLES (P) LTD	NEW DELHI	
		KEI INDUSTRIES LTD	NEW DELHI	
		KRISHNA ELECTRICAL INDUSTRIES LTD	GWALIOR	
17.	PVC CONTROL CABLES	KEC INTERNATIONAL LIMITED	MUMBAI	
		MANSFIELD CABLES COMPANY LTD	NOIDA	
		NICCO CORPORATION LTD	KOLKATA	
		PARAMOUNT COMMUNICATIONS LTD	NEW DELHI	
		POLYCAB WIRES PVT. LTD	MUMBAI	
		RAVIN CABLES LIMITED	MUMBAI	
		SUYOG ELECTRICALS LTD	VADODARA	
		SPECIAL CABLES PVT. LTD	NEW DELHI	
		SCOT INNOVATION WIRES AND CABLES PVT. LTD	SOLAN	
		SAM CABLES & CONDUCTORS (P) LTD	UDHAM SINGH NAGAR	
		SPM POWER & TELECOM PVT. LTD	HYDERABAD	
		TORRENT CABLES LTD	AHMEDABAD	
		THERMO CABLES LTD	HYDERABAD	
		TIRUPATI PLASTOMATICS PVT. LTD	JAIPUR	
		UNIVERSAL CABLES LTD	SATNA	
18.	TRAILING CABLES	NICCO	KOLKATA	
		UNIVERSAL	SATNA	

SUB-VENDOR LIST – SINGLE GIRDER CRANES

ANNEXURE-III

SR. NO.	ITEM	SUPPLIERS	PLACE	REMARKS
		INCAB		
		ICL	NEW DELHI	
		APAR INDUSTRIES LTD	MUMBAI	
		CMI LTD	FARIDABAD	
		KEI INDUSTRIES LTD	NEW DELHI	
		SUYOG ELECTRICALS LTD	VADODARA	
19.	XLPE POWER CABLES	APAR INDUSTRIES LTD	MUMBAI	
		CORDS CABLE INDUSTRIES LTD	NEW DELHI	
		CRYSTAL CABLE INDUSTRIES LTD	KOLKATA	
		DIAMOND POWER INFRASTRUCTURE LTD	VADODARA	
		GEMSCAB INDUSTRIES LTD	NEW DELHI	
		GOVIND CABLE INDUSTRIES	KOLKATA	
		GUPTA POWER INFRASTRUCTURE LIMITED	BHUBNESWAR	
		HAVELLS INDIA LIMITED	NOIDA	
		KEI INDUSTRIES LTD	NEW DELHI	
		KRISHNA ELECTRICAL INDUSTRIES LTD	GWALIOR	
		KEC INTERNATIONAL LIMITED	MUMBAI	
		MANSFIELD CABLES COMPANY LTD	NOIDA	
		PARAMOUNT COMMUNICATIONS LTD	NEW DELHI	
		POLYCAB WIRES PVT. LTD	MUMBAI	
		RAVIN CABLES LIMITED	MUMBAI	
		SUYOG ELECTRICALS LTD	VADODARA	
		SPECIAL CABLES PVT. LTD	NEW DELHI	
		SCOT INNOVATION WIRES AND CABLES PVT. LTD	SOLAN	
		SRIRAM CABLES PVT. LTD	NEW DELHI	
		TORRENT CABLES LTD	AHMEDABAD	
		THERMO CABLES LTD	HYDERABAD	
		TIRUPATI PLASTOMATICS PVT. LTD	JAIPUR	
	XLPE CONTROL CABLES	APAR INDUSTRIES LTD	MUMBAI	
		CABLE CORPORATION OF INDIA LTD	MUMBAI	
		CRYSTAL CABLE INDUSTRIES LTD	KOLKATA	
		DIAMOND POWER INFRASTRUCTURE LTD	VADODARA	
		GEMSCAB INDUSTRIES LTD	NEW DELHI	
		HAVELLS INDIA LIMITED	NOIDA	
		KEI INDUSTRIES LTD	NEW DELHI	
		KRISHNA ELECTRICAL INDUSTRIES LTD	GWALIOR	
		KEC INTERNATIONAL LIMITED	MUMBAI	
		PARAMOUNT COMMUNICATIONS	NEW DELHI	

SUB-VENDOR LIST – SINGLE GIRDER CRANES

ANNEXURE-III

SR. NO.	ITEM	SUPPLIERS	PLACE	REMARKS
		LTD		
		POLYCAB WIRES PVT. LTD	MUMBAI	
		RADIANT CORPORATION PRIVATE LIMITED	HYDERABAD	
		RAVIN CABLES LIMITED	MUMBAI	
		SUYOG ELECTRICALS LTD	VADODARA	
		SRIRAM CABLES PVT. LTD	NEW DELHI	
		TORRENT CABLES LTD	AHMEDABAD	
		UNIVERSAL CABLES LTD	SATNA	
21.	CABLE GLAND	COMMET		
		SUNIL&CO		
		ARUP ENGINEERING		
		JAINSON		
		DOWELL		
22.	PUSH BUTTONS	SIEMENS		
		L&T		
		BCH		
		SCHNEIDER		
23.	LIMIT SWITCHES	SPEED-O-CONTROL		
		ELECTROMAG		
24.	PENDENT PUSH BUTTON STATION	OEM		
25.	INDICATING LAMPS	TECKNIC		
		BCH		
		SIEMENS		
		STANDARD		
26.	MCB	MDS		
		INDO COPP		
		STANDARD		
		SIEMENS		
		L&T		
		ABB		
		SCHNEIDER		
27.	PANELS	OEM		
		RITTAL		
		PYROTECH		
28.	RESISTANCE BOXES	ENAPROS		
		OEM		
		SAFEX FIRE SERVICES LTD		
		UNITED FIRE EQUIPMENTS PVT. LTD		
		ZENITH FIRE SERVICES (INDIA) PVT LTD		
29.	VVVF	YASKAWA		
		ABB		
		SIEMENS		
		SCHNIEDER		
		FUJI ELECTRIC		

SUB-VENDOR LIST – SINGLE GIRDER CRANES**ANNEXURE-III**

SR. NO.	ITEM	SUPPLIERS	PLACE	REMARKS
		MITSUBISHI ELECTRIC		
30.	SHROUDED DSL	SUSHEEL		
		STROMAG		
31.	LOAD CELL	IPA		
		SARTORIUS		
32.	GEAR BOX	OEM		* = Applicable for Geared Motors only
		ELECON ENGINEERS		
		SHANTI GEARS		
		PBL*		
		NAW*		
		NORD*		
		SEW*		
		BONGFILIOLI*		
33.	RAIL	JSPL		
		SAIL		

NOTE:

1. THE SUB VENDOR LIST ABOVE IS INDICATIVE ONLY AND IS SUBJECT TO BHEL AND CUSTOMER APPROVAL DURING DETAILED ENGINEERING STAGE WITHOUT ANY COMMERCIAL & DELIVERY IMPLICATION TO BHEL.

BIDDER TO PROPOSE SUB VENDOR WITHIN 4 WEEKS OF PLACEMENT OF LOI. THEREAFTER NO REQUEST FOR ADDITIONAL SUB-VENDOR SHALL BE ENTERTAINED.

2. DEALERS ARE NOT ACCEPTABLE FOR ANY ITEM OF THE PACKAGE. BIDDER SHALL PROCURE ALL ITEMS INCLUDING PLATES, STRUCTURAL, FLANGES; COUNTER FLANGES ETC. FROM APPROVED SUB VENDOR ONLY.
3. THE INSPECTION CATEGORY WILL BE INTIMATED AFTER AWARD OF CONTRACT BY BHEL/CUSTOMER. HOWEVER THE SAME WILL BE ADHERED BY THE BIDDER WITHOUT ANY COMMERCIAL AND DELIVERY IMPLICATION TO BHEL/ CUSTOMER.



TECHNICAL SPECIFICATION FOR
SINGLE GIRDER CRANE

1 X 800 MW KOTHAGUDEM TPP

DOC. NO. PE-TS-410-524-A001

ANNEXURE-IV

Mandatory Spares:

For Single Girder Crane: For each capacity & Type of Crane

Sl. no	Description	Quantity
1	One set consisting of 2 nos. bearing for:	
	a) CT wheel	One set
	b) LT wheel	One set
2	One set consisting of 2 nos. brake linings with rivets for :	
	a) MH brake	One set
	b) AH brake	NA
	c) CT brake	One set
	d) LT brake	Two set
	e) MH creep brake	NA
	f) AH creep brake	NA
3	One set consisting of 2 nos. brake shoes with lining for :	
	a) MH brake	One set
	b) AH brake	NA
	c) CT brake	One set
	d) LT brake	Two sets
	e) MH creep brake	NA
	f) AH creep brake	NA
4	One set consisting of 6 nos. carbon brushes for :	
	a) MH motor	One set
	b) AH motor	NA
	c) CT motor	One set
	d) LT motor	Two sets
5	One set consisting of 3 nos. brush holders for:	
	a) MH motor	One set
	b) AH motor	NA

		TECHNICAL SPECIFICATION FOR SINGLE GIRDER CRANE 1 X 800 MW KOTHAGUDEM TPP		DOC. NO. PE-TS-410-524-A001	
		c) CT motor		One set	
		d) LT motor		Two set	
6		Fixed and moving contacts for each type of contactor		One set	
7		No volt coil for each type of contactor		One set	
8		Overload relay for:			
		a) MH motor		1 No.	
		b) AH motor		NA	
		c) CT motor		1 No.	
		d) LT motor		2 Nos.	
9		Motor bearings :			
		a) MH motor		2 Nos.	
		b) AH motor		NA	
		c) CT motor		2 Nos.	
		d) LT motor		4 Nos.	
10		Bearing for :			
		a) MH Main Pulley		2 Nos.	
		b) MH Eq. Pulley		2 Nos.	
		c) AH Main pulley		NA	
		d) AH Eq. Pulley		NA	
11		415 Volt Motor (Up to 30KW Rating			
11.1		Driving End & Non-Driving End Bearing		3Set for each type and rating of Motor	
11.2		Cooling Fan		2No. for each type and rating of Motor	
11.3		Motor Terminal Block		5Nos. for each type and rating of Motor	
11.4		Complete Set of Coupling		1Set for each Application	
12		Control Panel			
12.1		Back-up panel mounted devices (Selector switches/ Push buttons/ Indicators etc.		5% of installed capacity	
12.2		Lamps/ LEDs		100% of the total quantity	
12.3		Blank Tiles		10% of installed capacity	
12.4		MCBs		10% of each type & rating	
12.5		Fuses/ Fuse holder		100% of each type & rating	



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER EOT CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION – C-4

30.07.15

ANNEXURE-V

	BHEL DRG.NO	DRAWING TITLE	REMARKS	SUBMISSION SCHEDULE - WEEK NUMBER FROM DATE OF P.O
1	PE-V0-410-524-A001	Manufacturing Quality Plan with sub vendor list	APPROVAL	2
2	PE-V0-410-524-A002	Data sheet of Single Girder Crane with painting details	APPROVAL	2
3	PE-V0-410-524-A003	G.A.of Single Girder CRANE with CT DSL arrangement	APPROVAL	2
4	PE-V0-410-524-A004	Mechanism Sizing Calculation	APPROVAL	2
5	PE-V0-410-524-A005	G.A. drg of Hoist with trolley wheel and bottom block assembly	INFORMATION	3
7	PE-V0-410-524-A007	General arrangement for LT DSL for Single Girder crane	INFORMATION	3
8	PE-V0-410-524-A008	Schematic Circuit Diagram for following a) Main Protective panel & BOM b) Main hoist panel & BOM c) Cross Traverse and Long Travel panel & BOM d) Pendant and earthing.	APPROVAL	3
9	PE-V0-410-524-A009	Long travel Machinery Assembly with LT wheel assembly	INFORMATION	4
10	PE-V0-410-524-A018	O&M Manual	INFORMATION	8
12	PE-V0-410-524-A012	Cable sizing calculation and schedule.	APPROVAL	3
13	PE-V0-410-524-A016	Erection Procedure	INFORMATION	6
14	PE-V0-410-524-A014	Mandatory spare parts list	APPROVAL	6

Note: 1) BHEL/CUSTOMER SHALL COMMENT /APPROVE THE DRAWINGS WITHIN 15 DAYS OF RECEIPT OF DRAWINGS.

2) VENDOR SHALL RESUBMIT THE REVISED DRAWINGS WITHIN 7 DAYS OF RECEIPT OF COMMENTS.

3) INCOMPLETE DRAWINGS/DOCUMENTS SHALL NOT BE TREATED AS SUBMITTED

4) MANUFACTURING SHALL BE STARTED ON RECEIPT OF CAT II APPROVED DRAWINGS

ANNEXURE VI
DISTRIBUTION SCHEDULE

S. No	Description	TSGENCO							M/S DCPL, KOLKATA			Equipment Vendor	Remarks	
		Director Projects	Director Technical	CE/Civil Thermal Projects Hyd.	CE/TPC-I, Hyd	CE/O&M/ KTPS	SE/ Civil KTPS	SE/E&M / KTPS	DE Constr. KTPS	Kolkata	HYD	KTPS		
A	Letter Of Intent or Contract Documents	1	1	1	S	1	2	2	1	1	1	1	2	
B	Vendor Drawings													
1.	Preliminary	1	1	1	2	1	1	2	2	12	1	-	S	
2.	Return preliminary with comments	-	-	1	2	1	1	1	1	S	1	-	1	
3.	Final and any revision thereof													
	a. Civil	1	1	6+1T	1	1	6+1T	1	-	2+1T	1	1	S	
	b. E&M	1	1	1	6+1T	1	1	6+1T	1	2+1T	1	1	S	
C.	Design Drawings													
1.	Preliminary													
	a. Civil	1	1	2	1	1	2	1	1	4	1	1	S	
	b. E&M	1	1	1	2	1	1	2	1	4	1	1	S	
2.	Released for construction													
	a. Civil	1	1	2	1	1	6	1	1	1	1	2	S	
	b. E&M	1	1	1	1	2	1	6	1	1	1	2	S	
3.	Return marked 'As built'													
	a. Civil	-	-	1	-	-	1	-	-	1	1	S	1	
	b. E&M	-	-	-	1	-	-	1	1	1	1	S	1	
4.	As built drawings													
	a. Civil	-	-	1+1T	-	2+1T	5+1T	-	1	1+1T	-	1	S	
	b. E&M	-	-	1	2+1T	2+1T	-	5+1T	1+1T	1+1T	-	1	S	

DEVELOPMENT CONSULTANTS

(e-PCT-TS-K-02-2014-15-Vol. IIA-6 Annx.docx)

V.IIA/S-6 Anx-1: 1

S. No	Description	TSGENCO								M/S DCPL, KOLKATA			Equipment Vendor	Remarks
		Director Projects	Director Technical	CE/Civil Thermal Projects Hyd.	CE/ TPC-I, Hyd	CE/ O&M/ KTPS	SE/ Civil KTPS	SE/E&M / KTPS	DE Constr. KTPS	Kolkata	HYD	KTPS		
D	Progress Report Monthly													
1.	Equipment vendor	1	1	1	2	1	1	2	1	1	1	1	S	
2.	M/s DCPL, Kolkata	1	1	2	2	1	1	2	1	S	1	1	Nil	
E	Test & Inspection Reports													
1.	Equipment manufacturer													
	a. Civil	1	1	1	2	1	1	1	-	11	1	1	S	
s	b. E&M	1	1	-	2	1	-	1	1	11	1	1	S	
2.	M/s DCPL, Kolkata	1	1	-	2	1	-	1	1	S	-	1	-	
F	Instruction Manuals/Data Books													
1.	Equipment manufacturer													
	a. Civil	1	1	1+1T	1	1	6+1T	1	1	2+1T	1	1	S	
	b. E&M	1	1	-	3+1T	1	-	6+1T	2	3+1T	1	1	S	
2.	M/s DCPL, Kolkata	1	1	-	10+1T	1	-	15+1T	-	S	1	1	Nil	
G	M/s DCPL, Kolkata Criteria	1	1	1	8+1T	1	1	2	1	1	1	1	S	
H	Design Calculations	1	1	1	8+1T	1	1	2	1	1	1	1	S	
I	Final consulting Engineering Report	1	1	1	10	1	1	2	1	S	1	1	Nil	

S – Source, T – Transparency & Soft Copy on CD,

TSGENCO : Telangana State Power Generation Corporation Limited
Director, Projects, Hyd : Director/ Projects, TSGENCO, Vidyut Soudha, Hyderabad – 500 082

DEVELOPMENT CONSULTANTS
(e-PCT-TS-K-02-2014-15-Vol. IIA-6 Annx.docx)

V.IIA/S-6 Anx-1: 2



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 1 of 11

VOLUME - IIB

SECTION – D

STANDARD TECHNICAL REQUIREMENTS



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 2 of 11

SINGLE GIRDER EOT CRANE**1.0.0 SCOPE**

This specification covers the design, material, manufacture, assembly, inspection and testing at manufacturer works for single girder EOT crane. The equipment shall include all the accessories required for the trouble free operation.

The crane shall be complete with trolley and truck, wheels and axles, Drive mechanisms, Hoisting Drums, Brakes, Creep Speed Arrangement, and Lifting tackles, Buffers, Electric Motors, Controls, Switch Board and cabling, horns, warning lights, Limit switches etc. Any item not mentioned herein but required to make the system complete for the satisfactory performance of the crane shall also be included.

2.0.0 CODES AND STANDARDS

The equipment to be supplied under this specification shall conform to the following codes and standards (latest revisions) unless otherwise specified hereinafter.

- | | | |
|----|-----------------|---|
| a) | IS 807 | Codes of Practice for Design, Manufacture, Erection and Testing (Structural Portion) of cranes and hoists |
| b) | IS: 3177 | Code of Practice for Design of Overhead Travelling Cranes and Gantry Cranes other than steel work cranes |
| c) | IS: 2266 | Specification for steel wire ropes for general Engineering purposes. |
| d) | IS: 4029 | Guide for testing induction motor (for temperature rise) |
| e) | IS: 15560 | Steel hooks for standard shank design |
| f) | IS: 1554 Part I | PVC insulated (Heavy-duty) electric cables for working voltages up to and including 1100 volts. |
| g) | IS: 325 | Three phase induction motors. |



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 3 of 11

- | | | |
|----|------------------|--|
| h) | IS: 900 | Code of practice for installation and maintenance of induction motors |
| i) | IS: 694 (Part-I) | Copper conductors PVC insulated cables for voltage up to 1000 V. |
| k) | IS: 434 (Pt I) | Copper conductors rubber insulated cables for voltage up to 1000V. |
| m) | IS: 691 | Flexible trailing cables rubber insulated. |
| n) | IS 3043 | Code of practice Earthing. |
| o) | IS: 3938 | Electric Wire Rope Hoists. |
| p) | IS: 2147 | Degree of protection provided by enclosures for Low voltage switchgear and control gear. |
| q) | IS: 1544 | Polyethylene insulated PVC sheathed cables. |

Indian electricity rules - 1956.

In the event of any conflict between the specification and standards mentioned above, the specification shall govern.

3.0.0 SINGLE GIRDER EOT CRANE

3.1.0 DESIGN REQUIREMENTS

3.1.1 The crane shall be designed in accordance with the latest edition of IS-3177/IS-807 & hoist block shall be as per IS-3938 and any other standard as referred there in and subject to any modification and requirement as specified herein after.

Class of crane mechanism shall correspond to that of the crane requirement and as specified elsewhere.

3.1.2 Safety devices should be provided with all equipment/parts covered under this specification.

3.1.3 Parts requiring replacement or lubrication shall easily be accessible without dismantling the other equipment or structures. All electrical cables shall be laid to comply with recognized standards and purchaser's requirements.

3.1.4 For welded construction such as bridge girders, end carriages, rope drum, gearboxes etc; steel shall be conforming to IS-2062 quality.

3.1.5 No cast iron part shall be used on the crane.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 4 of 11

3.1.6 Guard shall be provided on crane to prevent the hoist ropes coming in contact with down shop leads.

Guards of an approved design, which will push forward or off the track any object such as a person foot or arm, placed across it. Guards shall be attached to each end of the end carriages. Suitable guards shall be provided to revolving shafts, coupling etc.

3.1.7 All cables shall be clamped individually. All trailing cables shall be clamped with PVC or non-metallic clamp.

3.1.8 All wheels, couplings, open gear etc. shall be provided with covers.

3.1.9 All bolts except those with locknut shall be provided with grip lock nuts or spring washers.

3.1.10 Fasteners for pedestal blocks, motors, gearboxes etc. shall be easily removable from the top. Studs shall not be used as fasteners for mechanical items except for fixing covers.

3.1.11 Defects in the material like fractures, cracks, blowholes, pitting etc. are not allowed. Rectification of any such flaw is permissible only with the approval of the purchaser.

3.1.12 All parts of the crane shall be thoroughly cleaned of mill scales, rust or foreign matter and then painted as per the specification requirements

3.1.13 The crane shall be manufactured as per the tolerances specified below

- | | | |
|----|--|------------------------------------|
| a) | Span over LT wheels | ± 3mm |
| b) | Diagonal on wheels | ± 3mm |
| c) | Long travel wheel alignment | ± 1mm |
| d) | Tilt of wheels or balancer axle | ±1/1000mm(horizontal and vertical) |
| e) | Permissible variation in Speeds at full notch with | rated load, voltage and frequency |
| | shall be as follows. | |
| | i) Travelling and traversing | ±10% |
| | ii) Hoisting Lowering | ±10% |

3.1.14 Proper allowance shall be made for impact and wear in the design of the crane and in no case shall the factor of safety in any part be less than six (6), as per IS: 3177 based on the ultimate strength of the materials used at design duty.

3.2.0 STRUCTURAL DETAILS

3.2.1 Crane structure shall be designed in accordance with the latest edition of IS-807 after taking the following additions/deviations as applicable.

3.2.1.1 Black bolts shall not be used in the main structure of the crane. The calculated strength of other bolted joints in structural members shall not be less than net strength of member plus 25%.

3.2.1.2 The calculated strength of riveted joint or joints made by friction grip bolts in structure members shall be not less than the calculated net strength of the member.

3.2.1.3 Bolts used in shear shall be fitted in to reamed hole.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 5 of 11

- 3.2.1.4 Transverse filled welding on load carrying member shall be avoided.
- 3.2.1.5 All butt welds on structural members subjected to tensile stress shall be X - rayed.
- 3.2.1.6 Fillet welding on load carrying members shall be avoided.
- 3.2.1.7 Plates, angles and other rolled section used in the load bearing members of the structure shall not be less than 6mm thick.
- 3.2.1.8 The cranes working out door or in corrosive environment, an allowance of 1.5 mm shall be added to the calculated thickness.
- 3.2.1.9 Minimum thickness of chequered plates for platform shall be over 5mm over plain. Chequered plates shall not be considered for strength calculations of load carrying member.
- 3.1.1.10 The material of construction of the major components shall be as specified in the specification/data sheet. Manufacturer are however free to use alternate material material which are superior for the intended service. But in all the cases, prior concurrence of the purchaser is must.
- 3.2.2 **Girder / Beam**
- 3.2.2.1 The girder / beam shall consist of a box construction with double web plate girders or lattice girders and shall be of adequate strength to withstand the rolling loads and other stresses it is subjected to. The design of the girder shall be in accordance with latest edition of IS- 807 with the following deletion / addition as applicable.
- 3.2.2.2 Minimum deflection of the bridge girder with safe working load shall not exceed 1/800 of span. The girder shall be cambered by an amount equal to the maximum deflection due to dead load plus one half the live load and trolley.
- 3.2.3 **End carriage**
- 3.2.3.1 End carriages shall be fabricated from rolled steel section or plates or as the case may be. End carriage shall be of ample strength to resist all stresses likely to be imposed on them under service conditions including collision with other cranes or stops.
- 3.3.0 **MECHANICAL**
- 3.3.1 **Rope drums**
- Rope drums shall be of mild steel plate fabricated or of cast steel. All fabricated rope drums shall be stress relieved. The drum shall be so designed to take full length of hoisting rope in single layers. The end of the rope shall be anchored to the drum in such a way that the charger in readily accessible. Each rope shall have not less than two (2). Full turns on the drum when the hook is at lowest position not taking into consideration the turns covered by the rope in charge. There shall be one spare groove for each rope lead when the hook is at the highest



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 6 of 11

position. Each rope end shall be clamped with minimum two clamping wedges with at least two bolts on each clamping arrangement.

The pitch diameter of the drum shall be as per IS -3177 or as specified elsewhere. The depth of the groove shall not be less than 0.35 times the rope diameter. Each rope shall be clamped to drum with two clamp wedges with at least two numbers of bolts on each clamping arrangement.

3.3.2 Hoist ropes

Ropes of steel core as specified in Data Sheet – A/B shall be of right hand lay, of 6x36 construction of best plough steel having minimum tensile strength as 160-180 kg/mm². Left hand lay wire ropes shall not be used (Reverse bend ropes shall be avoided as far as possible).

3.3.3 Rope sheaves

Sheaves shall be of cast steel. All sheaves shall be identical, however, exception may be made for equalizer sheave. Sheave groove shall be ground finished for getting increase rope life. Equalizer sheave shall be arranged to turn and swivel in order to maintain rope alignment under all circumstances.

3.3.4 Wheels

LT wheels shall be double flanged with tread to suit the rail. The wheels shall be capable of taking up misalignment in span as specified. Solid wheel shall either be of forged steel or as specified. The wheel shall be with hardness of BHN 300-350. Contact stresses between wheels and rails should be within permissible limits.

3.3.5 Buffer

Each End carriage shall be provided with buffer as per data sheet 'A'. Buffers should be so located that removal is not required while changing wheels or bogies. Buffers shall have sufficient tension on energy absorption capacity to bring the unloaded crane to rest from the speed of 50% of the rated speed to zero speed.

3.3.6 LT drive

One pair of wheels in each end carriage shall be driven by motor through reduction gear.

3.3.7 CT drive

The CT mechanism of the electric hoist shall consist of 2pairs of wheels which shall be driven by motor through reduction gear.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 7 of 11

3.3.8. Gearing

3.3.8.1 Spur and helical gearing shall normally be used for all motions. Worms and bevel gears shall not be used. First high-speed reduction shall be through helical gears. All gears shall be hardened and tempered and of alloy steel with machine cut teeth. Surface hardening of teeth is not acceptable. Gear teeth shall preferably be cut in metric module system. Gears shall be designed to meet requirement of crane duty as per IS: 3177. The ratings of gears shall be established as per IS: 4660.

3.3.9 Gear Box

3.3.9.1 All gears shall be completely covered and enclosed in oil tight casing & sealed with gasket.

3.3.9.2 The gearboxes shall be of mild steel or cast steel. All fabricated gearboxes shall be stress relieved.

3.3.10 Bearing

3.3.10.1 Ball and roller antifriction bearing of FAG, SKF, NBC, NORMA make shall be used throughout, except where specified otherwise. Rated life of ball and roller bearing shall be not less than total working life as per relevant codes. Life of bearing shall be calculated in accordance with manufacturers recommendations.

3.3.10.2 Provision shall be made for service lubrication of all bearings. Bearing enclosures shall be designed as far as possible to exclude dirt and prevent oil leakage.

3.3.11. Couplings

3.3.11.1 Motor shafts shall be connected to gear box input extension shafts through flexible gear coupling. Solid coupling shall be used for connecting intermediate lengths of long travel shafts, if applicable.

3.3.12 Lifting hook

Standard hooks shall be used unless otherwise specified. These hooks shall conform to the latest edition of IS 15560 as specified in the data sheet "A".

3.3.13 Brakes

3.3.13.1 Selection and design of brakes shall be such as to meet the requirement. Electro mechanical brakes shall be provided for each motions. Brakes shall be designed to suit 150% FLT of motor for the hoist motion and 125 % FLT of motor for LT/CT motion. Brakes shall be provided as specified in Data Sheet 'A'

3.4.0 ELECTRICAL

3.4.1 The scope of supply shall cover all electrical equipments comprising from Main isolating switch, down shop leads, trolley conductors, current collectors etc.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 8 of 11

- 3.4.1.1 Main isolating Switch fuse unit shall be provided at 1.5M above the operating floor level at one end of bay length or in the middle as specified in the data sheet A. Supply of cable from switch to down shop leads shall be included in the bidder's scope of work.. The switch shall be provided with Power ON Red indication lamp.
- 3.4.1.2 Run way conductors (Down shop leads) shrouded conductor as specified in the data sheet A shall have four conductors. One of the conductors shall be connected to earth grid for earthing connections of all electrical equipments on the crane and shall be connected to suitable collecting gear of earth conductor. Voltage drop across the down shop leads shall be less than 2%. Maintenance cradle for DSL shall be provided on crane if asked in Data Sheet 'A'. Sufficient allowance of min. 10% for wear & tear shall be considered while sizing the conductor. The runway conductors shall be supported on brackets and insulators.
- 3.4.1.3 The current collectors shall be of adequate current carrying capacity and shall maintain adequate contact pressure. Spacing between current collectors shall be such as to provide sufficient quenching area for sparks coming out of collectors surface. The collector system per conductor shall be top-running type having spring loaded CI/carbon metallic shoes to maintain adequate contact pressure.
- 3.4.1.4 The cable, supplying power to crane trolley / electric hoist shall be flexible trailing cable as per IS-9968 Part I (latest edition) and mounted on retracting supports (festoon type)
- 3.4.2 DRIVE MOTORS**
- 3.4.2.1 Crane motors shall be totally enclosed, fan cooled and as per data sheet 'A'. The break down torque of the motors shall not be less than 225 percent of the full load torque with rated voltage and frequency applied and pull out torque shall not be less than 250% of the rated full load torque of motor.
- 3.4.2.2 Ambient correction factors as well as voltage /frequency correction factors depending upon the ambient temperature and voltage /frequency variation shall be applied to derate the motors. The minimum margin of 15% or as specified in the section C of specification shall be considered over the calculated rating of the motor. The protection class of the motors shall be as per data sheet A. Motors shall be tested at manufacturers works in accordance with IS-325/as per agreed Quality plan & Reports shall be submitted for approval. Motors shall comply with the requirement of IS-325-1978 or as per the motor specification if enclosed here with.
- 3.4.2.3 All the motors shall be provided with lifting lugs, two earth terminals of adequate size to accept the earthing conductors shall be provided at diametrically opposite points unless specifically designed For higher speeds, motors shall be capable of withstanding 2.5 times the rated speed.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 9 of 11

3.4.3 Limit Switch

The hoist mechanism of the crane shall be provided with rotary type limit switch to open the control circuit and in order to prevent the crane hook from over hoisting and over lowering. One gravity type back-up limit switch of hand-reset type shall be provided. This switch shall operate in the event of failure of main limit switch if called for in data sheet "A".

Lever operated limit switches shall be provided at both ends of longitude travel and cross traverse. These limit switches shall be self reset type.

3.4.8 Protective Panel / Controls

3.4.8.1 The electrical protective panel shall be a cubicle fabricated from 2 mm thick sheet steel with lockable-hinged door. It shall be dust and vermin proof with degree of protection as IP-55 or as specified in data sheet A. All the equipment inside the panel shall have permanent identification. The panels shall be front connected type with front-hinged door for access to wiring and terminals. Engraved nameplate shall be furnished for all panels and also for the equipments and devices mounted there on.

The following minimum equipments shall be provided.

- a) One triple pole air break type main contactor with thermal overload relay.
- b) One triple pole main line connecting/disconnecting switch.
- c) Switch fuse unit with D.O.L. starter for each motion.
- d) Thermal overload relay for each drive. It shall be ambient temperature compensated and adjustable type.
- e) Contactors, timer and auxiliary contactors.
- f) Control transformer with fuses.
- g) Indicating lamps to indicate the live condition of all three phases.
- h) Other equipments as per supplier's standard practice. Air break contactors shall conform to category AC-4 duty. The contactor drop off voltage shall be between 45-50% of rated voltage.
- i) All internal wiring shall be identified with numbering ferrules at both ends as per the relevant wiring diagram.

3.4.9 Pendent Push button station

It shall be suspended by wire rope to prevent pull on the cables. The following minimum push buttons key operated type.

- a) Main "ON", "OFF" push button key operated and lockable in "OFF" position.
This push button will operate the main contactor.
- b) Hoist and lower directions. (2Nos.)
- c) Trolley travels both directions. (2 Nos.)



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 10 of 11

- d) Bridge travels both directions. (2 Nos.)
- e) Inching speed for hoisting & lowering
- f) Inching speed for bridge motion.
- g) Inching speed for trolley motion.
- h) Creep speeds
- i) Emergency stop push button (mushroom type).
- j) Alarm bell push button.

3.4.10 **Grounding**

- 3.4.10.1 The crane structure, motor frame and all other electrical equipments shall be grounded in accordance with the Indian Electricity Rules. The connections from Crane Bridge to 4th conductor of down shop leads shall be by means of current collector.
- 3.4.10.2 The equipment fed by flexible cables shall be grounded by means of fourth core provided in the flexible trailing cable. Pendant push button station shall be earthed separately.
- 3.4.10.3 Red warning light 3 Nos. shall be provided at both ends of the gantry girder to indicate the aliveness of DSL.

3.4.15 **WIRING SYSTEM**

- a) The supplier shall furnish all power, control and auxiliary circuit wiring of the equipment and the panel located on the trolley or bridge.
- b) The wiring shall be complete in all respect to ensure the proper functioning of the equipment.
- c) Power wiring to any motor shall be done with 1100V grade Cu conductor, PVC insulated / armoured /FRLS cable of suitable sizes as specified in Data Sheet A.
- d) For selecting the cable rating, cable for power wiring, consideration shall be given to the motor duty, ambient temperature grouping and disposition of the cables voltage drop etc.
- e) All control and auxiliary external circuit wiring shall be done with PVC insulated FRLS type 2.5mm stranded copper conductor.
- f) Armoured cables or un-armoured running through the flexible conduits may be used for power wiring / control and auxiliary circuit wiring shall run through flexible conduits.
- g) Each motor shall be wired independently. Power and control wiring shall be effectively separated.
- h) Each wire shall be identified at both ends with wire designation in accordance with circuit wiring diagram.
- i) All wire termination to the panels shall be provided with clamp type connections screw. Type terminals with screw directly impinging on conductors are not acceptable.



**TECHNICAL SPECIFICATION FOR SINGLE
GIRDER CRANE
1 X 800 MW KOTHAGUDEM TPP**

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME - IIB

SECTION - D

Rev 00

30.07.15

Page 11 of 11

- j) Multi-way terminal blocks complete with screw nut, washer and marking strips shall be furnished for terminating the panel wiring and outgoing.
- k) Not more than two wires shall be connected to any terminal on either side of terminal block. If necessary number of terminals shall be jumped together to provide the wiring points
- l) Each terminal block shall be marked with designation in accordance with conductors wiring diagram.

4.0.0 LOAD INDICATION:

The crane shall have a permanent inscription of English on each side, readily visible from the ground level, stating the safe working loads in tonnes, year of manufacture, crane serial number and manufacturer's name.



TITLE

TECHNICAL SPECIFICATION
FOR VVVF DRIVE

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME II - B

SECTION -D

Rev 00

1 OF 5

1.0 General

- a) This part of the specification describes the general requirements for the Variable Voltage Variable frequency Drives, herein referred to as AC Drives, for use with standard IEC design AC squirrel cage induction motors. The nominal values, the standard documents and the drive's minimum performance are defined in this part. **To avoid any mismatch between the motor and its control equipment, the AC Drive shall be capable of auto adjustment by automatic measurement of the motor parameters with/without motor rotation.**

- b) Inverter construction and related devices:

Construction shall be divided in 3 broad sections. Section one converts AC Supply into DC supply. Section 2 Converts and controls DC supply into AC Supply with regulation. Section 3 shall be used for braking action of the motor and Dynamic Braking Unit (DBU) can be inbuilt or external depending upon the drive capacity. VVVF can be used in open loop (without external speed feed back) like in Travel motions or close loop (With external speed feed back) like in Hoist motions. Chokes on input supply side are generally used in crane application for power regulation. Like all other electronic / electric devices VVVF drives are also protected by MCB / MCCB / Fuses. VVVF drives are sensitive to temperature and hence drive internal as well as external cooling fans are provided.

- c) Programming of VVVF Drives.

VVVF drives shall be programmable and for that purpose detachable digital Operator display unit shall be supplied along with the VVVF having required buttons for setting the user constant, functions etc. The VVVF drive is to be fine tuned by matching the motor parameters and setting the parameters on full load.

- d) VVVF drives shall be connected with power supply and these drives generate their own low voltage control supply. Potential free contacts shall be connected to this control supply and few programmable control terminals. Starting / stopping / set speeds operations of VVVF drive shall be achieved by above control connection.
- e) VVVF shall give smooth control over acceleration and deceleration making the motion jerk free and using Variable voltage variable frequency limits the inrush current to the squirrel cage motors. VVVF provides controlled torque to the motor due to which crane operations are jerk free.

1.1 Experience

The Frequency Converter Manufacturer shall have adequate experience in frequency converter manufacturing and have adequate business volume in order to provide credibility in his commitments and a capability of long term support.

1.2 Local support



TITLE

TECHNICAL SPECIFICATION
FOR VVVF DRIVE

SPECIFICATION NO. PE-TS- 403-524-A001

VOLUME II - B

SECTION -D

Rev 00

2 OF 5

The Supplier shall have a permanent representative office with a trained and skilled support staff, in the country where the goods are delivered, in order to prove his commitment for local support and to provide a channel for communication.

The engineers employed by the Supplier's regional office shall be certified by the Manufacturer and provide start-up service including physical inspection of the drive, connected wiring and final adjustments, to ensure that the AC Drive meets the required performance.

The Supplier shall be able to give basic drives training to the Customer's engineers, preferably on the site. The training shall, as a minimum, include system concepts and basic troubleshooting.

2.0 Basic requirements for the AC Drives

2.1 General requirements

The AC Drive shall comply with National(country of origin) and International standards and the recommendations for electrical industrial control devices (IEC, EN, UL, NFC, VDE).

The AC Drive shall be of the most modern design, yet user friendly and be simple to install, commission and maintain. The AC Drive shall be able to start and control the speed of a standard squirrel cage induction AC motor. The AC Drives shall be : CE marked, conforming to European Low Voltage (73/23/CEE and 93/68/CEE) and EMC (89/336/CEE) Directives, UL/CSA marked according to UL 508C.

The AC Drives have to be built to comply with the IEC standards.

The AC Drive shall be a digitally controlled drive, using, at least, the Pulse Width Modulation (PWM) with flux vector control open loop(for travel) and closed loop(for hoist). It shall have diodes / thyristors in rectifier and IGBT's in the inverter section in their entire power range, and it shall have the following minimum specifications.

Rated Input Voltages	380V -15% 480V +10%, three-phase
Rated Input Frequency	50Hz +/- 5%
Output Voltage	0 – Input voltage, three-phase
Output Frequency Range	0 to 400 Hz
Acceleration / Deceleration Time	0.01 – 999s, adjustable, linear, with S, with U or customised shapes
Overload capability (Constant Torque)	150% of nominal current for 1min.
Operating ambient Temperature	-10°C up to 50°C(shall be derated suitably



TITLE

TECHNICAL SPECIFICATION
FOR VVVF DRIVE

SPECIFICATION NO. PE-TS-403-524-A001

VOLUME II - B

SECTION -D

Rev 00

3 OF 5

	if not rated at 50°C)
Storage ambient Temperature	-25°C up to 70 °C
Maximum operating altitude	1000 m without de-rating, 1000...3000 (shall be de-rated suitably)
Max. Relative Humidity	95 %, without condensation and dripping water.
Main Protections	Over current, short circuit between phase, short circuit between phase and ground, input phase loss, output phase loss, motor overload, over speed, over voltage, under voltage, drive over temperature

The AC Drive shall be able to give a 100 % output current continuously in the above specified conditions. In order to ensure that the drive can provide the required output current in the specified ambient conditions, the Manufacturer shall inform the required derating, if the ambient temperature given in the project-specific specification is higher than rated ambient of the drive or if the installation altitude is more than 1000 m above the sea level. The de-rating factor shall be specified so that neither the lifetime of the AC Drive nor the unit's performance, overload capability included, nor the reliability of the AC Drive shall suffer.

The VVVF drives shall have all necessary protections i.e input phase loss, earth fault, over voltage, output short circuit, load loss , input transient protection, overload etc

Suitable encoder shall be provided for all motions.

3.0 User interface

3.1 General

The user interface shall be identical throughout the power range and type to avoid confusion amongst the users and need for training in several different units.

3.2 Inputs and outputs

- A. At least, the following standard Inputs and Outputs shall be provided, to be used in interface with the control system:

Analogue Inputs : 1 x Programmable differential voltage input $\pm 10V$,
1 x Programmable current input 0(4) - 20mA
1 x Programmable voltage input 0 – 10V

Analogue Output : 1 x Programmable analogue outputs 0(4) - 20mA or 0 – 10V

Logic inputs : 6 x Programmable logic Inputs isolated from the mains



TITLE

TECHNICAL SPECIFICATION
FOR VVVF DRIVE

SPECIFICATION NO. PE-TS-403-524-A001

VOLUME II - B

SECTION -D

Rev 00

4 OF 5

Relay Outputs : 2 x Programmable Digital outputs with a changeover dry contact

All the control terminals shall be clearly marked.

B. At least, it shall be possible to assigned the following functions to the I/Os:

Analogue input	Analogue outputs
Speed reference Summing reference	Motor current Motor frequency Motor torque Motor power
Logic input	Relay or logic outputs (open collector)
Forward Reverse Jog Preset speeds Reference switching Ramp switching Parameter sets selection Fast stop Freewheel stop + speed - speed External fault	Ready Drive running High speed attained Drive fault Frequency threshold attained Motor thermal state attained Torque or current limitation attained Brake control

3.4 Programming terminal

- A. The AC drive shall have a keypad /display for programming and controlling purposes. An IP54 or IP65 remote mounting shall be possible at a distance of 10m.
- B. Password protection shall be provided to avoid unauthorized tampering with the set parameters.
- C. The programming terminal shall be able to display the commercial reference of the AC drive and of the options, the software version, the serial number
- D. Direct keypad entry shall be provided to observe the following actual parameters. Any one of the following parameters or actual values shall be selected to be always displayed:-
- i) Input Voltage
 - ii) Input Frequency
 - iii) Output Frequency
 - iv) Output Power
 - v) Output Current

	TITLE	SPECIFICATION NO. PE-TS- 403-524-A001	
	<u>TECHNICAL SPECIFICATION</u> <u>FOR VVVF DRIVE</u>	VOLUME II - B	
		SECTION -D	
		Rev 00	
		5 OF 5	

vi) Motor Speed

The following parameters shall always be displayed during normal operation:-

i) Drive Status

The following drive control functions at least shall be available from the keypad:-

i) Run

ii) Stop

iii) Local / Remote selection.

iv) Forward/Reverse (if function enabled)

v) Accelerate

vi) Decelerate

vii) Parameter setting

3.5 Application programming

The AC Drive shall be designed for both simple and the most complicated applications, yet it shall be user friendly. It shall be possible to reset the parameter settings back to the original factory settings through the keypad.

3.6 PC Tools

The AC Drive Supplier shall have a Windows based PC software available for monitoring and controlling the AC Drives, and the software shall be offered as an option. The software shall be supplied with the necessary hardware and a provision for connecting a PC with the AC Drives. It shall be possible to set and modify parameters, control the drive, read actual values and make trend analysis using the software.

4.0 Software features

A. Restart

In the event of a fault trip due to over voltage, over current or loss of analogue signal, the AC DRIVE shall be programmable to attempt an automatic restart. For safety reasons, the maximum number of attempts shall be within a selectable time. If the fault does not clear after the attempts, the drive shall lock out.

B. Brake logic control

The AC Drive shall have a built-in function to control a mechanical brake in order to move the load in a smooth and safe way. The brake logic control shall be adapted to the different movements, hoisting, travel, and orientation.

5.0 Preferred makes:

Schneider Electric, L&T-YASKAWA, Siemens, ABB.

150 of 163



TITLE

1X800 MW KOTHAGUEDEM TPP
SINGLE GIRDER CRANES

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME: III

REV 00

30.07.2015

VOLUME - III



TITLE:

**1X800 MW KOTHAGUEDEM TPP
TECHNICAL SPECIFICATION
COMPLIANCE CUM CONFIRMATION
CERTIFICATE**

SPEC. NO.: PE-TS-410-524-A001

VOLUME: III

SECTION:

REV. NO. 00

SHEET 1 OF 2

COMPLIANCE CUM CONFIRMATION CERTIFICATE

The bidder shall confirm compliance with following by signing / stamping this compliance certificate (every sheet) and furnish same with the offer.

- a) The scope of supply, technical details, construction features, design parameters etc. shall be as per technical specification & there are no exclusions, other than those mentioned under “exclusion and those resolved as per ‘Schedule of Deviations’, with regard to same.
- b) There are no other deviations w.r.t. specifications other than those furnished in the ‘Schedule of Deviations’. Any other deviation, stated or implied, taken elsewhere in the offer stands withdrawn unless specifically brought out in the ‘Schedule of Deviations’
- c) Bidder shall submit QP in the event of order based on the guidelines given in the specification & QP enclosed therein. QP will be subject to BHEL / CUSTOMER approval & customer hold points for inspection / testing shall be marked in the QP at the contract stage. Inspection / testing shall be witnessed as per same apart from review of various test certificates/ Inspection records etc. This is within the contracted price without any extra implications to BHEL after award of the contract.
- d) All drawings/ data-sheets / calculations etc. submitted along with the offer shall not be taken cognizance off.
- e) The offered materials shall be either equivalent or superior to those specified in the specification & shall meet the specified / intended duty requirements. In case the material specified in the specifications is not compatible for intended duty requirements then same shall be resolved by the bidder with BHEL during the pre-bid discussions, otherwise BHEL / Customer’s decision shall be binding on the bidder whenever the deficiency is pointed out.

For components where materials are not specified, same shall be suitable for intended duty, all materials shall be subject to approval in the event of order.

- f) The commissioning spares shall be supplied on ‘As Required Basis’ & prices for same included in the base price itself.
- g) All sub vendors shall be subject to BHEL / CUSTOMER approval in the event of order.
- h) Guarantee for plant/equipment shall be as per relevant clause of GCC / SCC / Other Commercial Terms & Conditions
- i) In the event of order, all the material required for completing the job at site shall be supplied by the bidder within the ordered price even if the same are additional to approved billing break up, approved drawing or approved Bill of quantities within the scope of work as tender specification. This clause will apply in case during site commissioning, additional requirements emerges due to customer and / or consultant’s comments. No extra claims shall be put on this account



TITLE:

**1X800 MW KOTHAGUEDEM TPP
TECHNICAL SPECIFICATION
COMPLIANCE CUM CONFIRMATION
CERTIFICATE**

SPEC. NO.: PE-TS-410-524-A001

VOLUME: III

SECTION:

REV. NO. 00

SHEET 2 OF 2

- j) Schedule of drawings submissions, comment incorporations & approval shall be as stipulated in the specifications. The successful bidder shall depute his design personnel to BHEL's / Customer's / Consultant's office for across the table resolution of issues and to get documents approved in the stipulated time.
- k) As built drawings shall be submitted as and when required during the project execution.
- l) The bidder has not tempered with this compliance cum confirmation certificate and if at any stage any tempering in the signed copy of this document is noticed then same shall be treated as breach of contract and suitable actions shall be taken against the bidder.
- m) Successful bidder shall furnish detailed erection manual for each of the equipment supplied under this contract at least 3 months before the scheduled erection of the concerned equipment / component or along with supply of concerned equipment / component whichever is earlier.
- n) Document approval by customer under Approval category or information category shall not absolve the vendor of their contractual obligations of completing the work as per specification requirement. Any deviation from specified requirement shall be reported by the vendor in writing and require written approval. Unless any change in specified requirement has been brought out by the vendor during detail engineering in writing while submitting the document to customer for approval, approved document (with implicit deviation) will not be cited as a reason for not following the specification requirement.
- o) In case vendor submits revised drawing after approval of the corresponding drawing, any delay in approval of revised drawing shall be to vendor's account and shall not be used as a reason for extension in contract completion.



TITLE

TECHNICAL SPECIFICATION FOR SINGLE GIRDER CRANE

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME III

SECTION

REV 00

DATE

SHEET 1 OF 1

PRE-BID CLARIFICATION SCHEDULE

S. No.	Section/Clause /Page No.	Statement of the referred clause	Clarification Required

The bidder hereby certifies that above mentioned are the only clarifications required on the technical specification for the subject package.

SIGNATURE: _____


NAME: _____

DESIGNATION: _____

COMPANY: _____

DATE: _____

COMPANY SEAL



NAME OF VENDOR:-

TECHNICAL DEVIATIONS

COMMERCIAL DEVIATIONS

PARTICULARS OF BIDDERS/ AUTHORISED REPRESENTATIVE	
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	

NOTES:

- 155 of 163



TECHNICAL SPECIFICATION FOR
SINGLE GIRDER CRANE
1X800 MW KOTHAGUDEM TPP

SPECIFICATION NO. PE-TS-410-524-A001

VOLUME III

REV 00

DATE 30.07.2015

DRAWINGS / DOCUMENTS TO BE SUBMITTED WITH THE BID

Bidder shall submit the following drawings / documents along with their bid

- a) Signed & stamped Electrical load list
- b) Deviation schedule with reference to specific clauses of the specification along with reason for such deviation or No deviation in the format given under Vol.-III
- c) Un priced copy of price format indicating quoted/ not quoted against each row/column
- d) Copy of pre-bid clarifications, if any, duly signed & stamped
- e) Signed/ Stamped copy of Compliance cum Confirmation Certificate (Vol.-III)

OFFER WILL BE CONSIDERED AS INCOMPLETE IN ABSENCE OF ANY OF ABOVE DOCUMENTS. DOCUMENT OTHER THAN ABOVE, IF ANY, SUBMITTED WITH THE OFFER WILL NOT FORM PART OF CONTRACT AND ACCORDINGLY WILL NOT BE CONSIDERED FOR BID EVALUATION.

Fold-3

COMPUTER FILE NAME : TAL5

COPY RIGHT AND CONFIDENTIAL
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED
It must not be used directly or indirectly in any way detrimental to the interest of the company.

100V-425-014-DG-Ed

DRAWING No.


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
ALL DIMENSIONS ARE IN MM
FIRST ANGLE PROJECTION

Fold-2

Fold-1

CUSTOMER'S DRAWING No.



DESIGN PARAMETERS	
A	12150
B	*
C	*
D	14050
E	5800
F	*
G	750
H	950
L	950
M	*
N	600

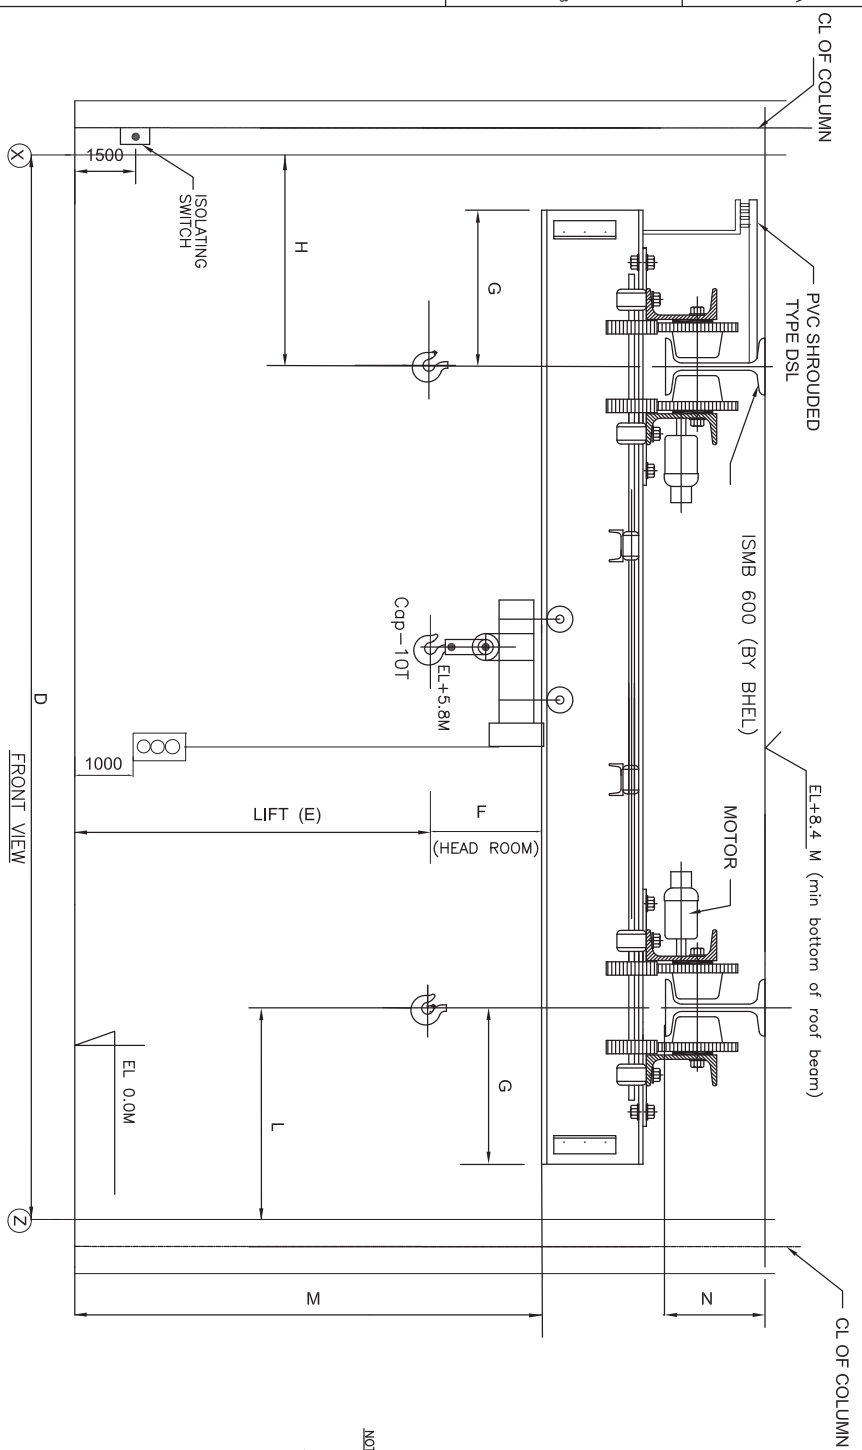


NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. CRANE WEIGHT = 6T (MAX), HOIST WEIGHT = 0.75T (MAX)

LT WHEEL LOAD WITH OUT IMPACT (W=3 T)

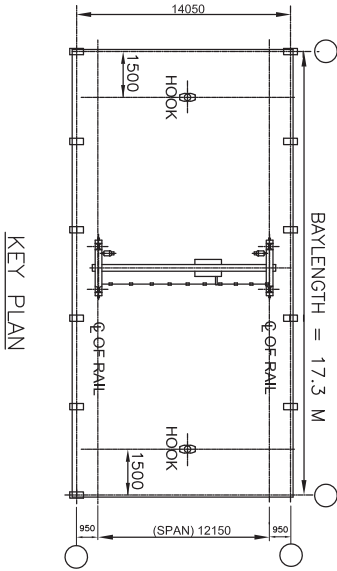

KEY PLAN

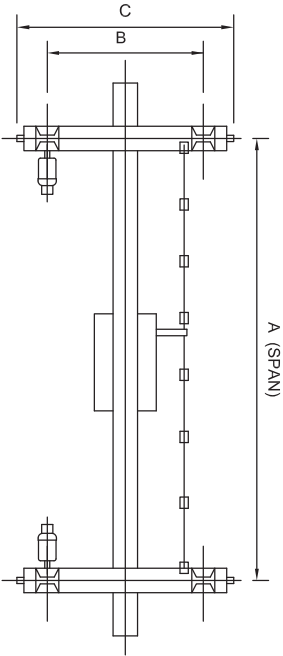

TOP VIEW

Fold-3

Fold-2

200W-42S-40S-3d NQ GINWAWD

Fold-2

3

4

5

6

Fold-1

17400(Span)

800

EL + 9.4 M
BOTTOM OF ROOF

200

EL + 8.0 M
TOP OF GIRDER

SPACE FOR
CLEAR WALKWAY
(BOTH SIDE
500mm)

LT DSL
(PVC SHROUDED)

10T

CONTROL
PANEL

EL + 6.5 M

1300

1200

6000 (LIFT)

1200

1300

1500

Isolating switch

EL + 0.0 M
OPERATING FLOOR

FRONT VIEW X-X
20000

1000*

1000*


F

J

NOTES:

CRANE CAPACITY SELECTED = 10 T


2. *"MARKED DIMENSIONS ARE TENTATIVE & ANY CHANGE IN COLUMN SIZE SHALL AFFECT CRANE SPAN & APPROACHES

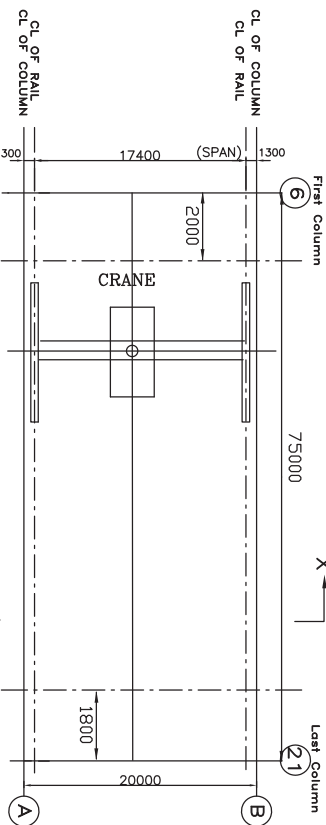

KEY PLAN

X

Sl. NO.	TECHNICAL SPECIFICATIONS PARAMETERS		
8.	CREEP SPEED SHALL BE ACHIEVED THRU VVVF DRIVES		
6.	CLASS	M6	
7.	DUTY	INDOOR DUTY	
6.	QTY.	1 NO	
5.	BAYLENGTH	75.0 MTRS	
4.	LIFT	6.5 MTRS	
3.	WHEEL LOAD (WITHOUT IMPACT)	6 T	
2.	SPAN	17.4 MTRS	
1.	SAFE WORKING LOAD	10 T	



LT WHEEL LOAD
(WITHOUT IMPACT)

CLIENT: TELANGANA STATE POWER GENERATION CORPORATION LTD
1480 AM KOTAMUDAM TFS STAGE-VII UNIT-4, PALONCHA
TELANGANA STATE INDIA

CONSULTANT: DEVELOPMENT CONSULTANTS PVT. LTD.
CONSULTING ENGINEERS
KOLKATA, MUMBAI, CHENNAI, NEW DELHI

PROJECT: BHARAT HEAVY ELECTRICALS LTD
POWER SECTOR
PROJECT ENG. MANAGEMENT
INDIA

TITLE: CRANE CLEARANCE DIAGRAM FOR 8T CAPACITY SINGLE GIRDER
O/H CRANE FOR STORE BUILDING

DATE: 15/05/2022

REV: 0

COMPUTER FILE NAME : TAL5

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

COPY RIGHT AND CONFIDENTIAL

The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED. It must not be used directly or indirectly in any way detrimental to the interest of the company.


Fold-2

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

Fold-3

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT




DESIGN PARAMETERS	
A	5800
B	*
C	*
D	8500
E	19000
F	*
G	750
H	1350
L	1350
M	*
N	500

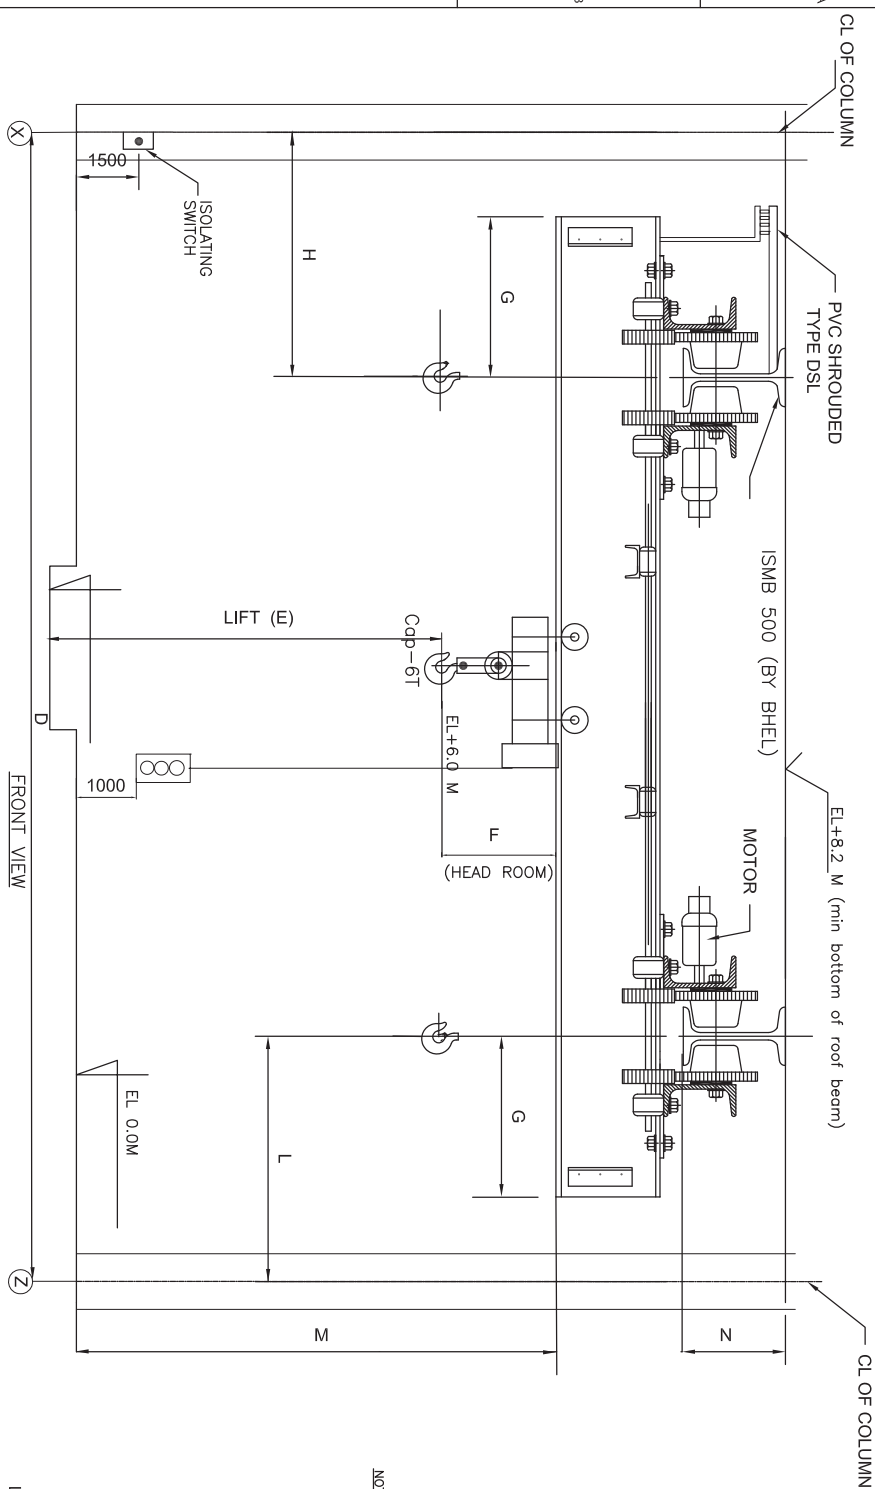

NOTES:

1. ALL DIMENSIONS ARE IN MM.

LT WHEEL LOAD WITH OUT IMPACT (W=1.5 T)

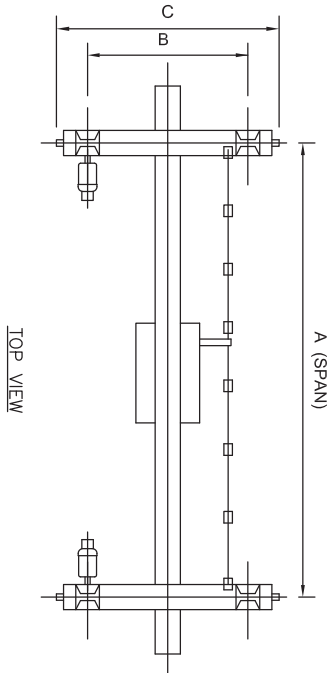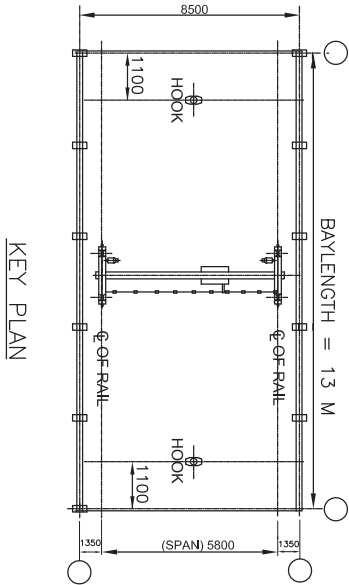

KEY PLAN

TOP VIEW

TATANAGAR STATE POWER CORPORATION LIMITED
TATANAGAR STATE, INDIA
1600 AN KOTHIKOTWAD PMS STAGE-VII UNIT-12, PUNJACH
DEVELOPMENT CONSULTANTS PVT. LTD.
CONSULTING ENGINEERS
KOLKATA-700001
INDIA

BHARAT HEAVY ELECTRICALS LTD
PROJECT ENGINEERING DEPARTMENT
INDIA

PROJECT NO. 300V-423-011-410-DG-PE-4

DATE: 10/01/2023




BY: [Signature]

CHECKED: [Signature]

APPROVED: [Signature]



SCALE: 1:1

FIG. 8

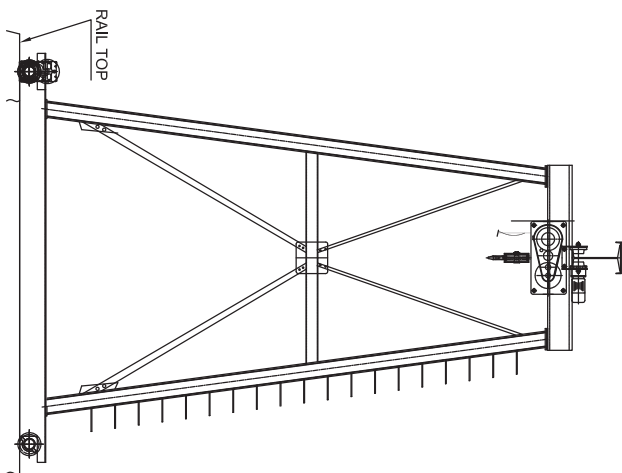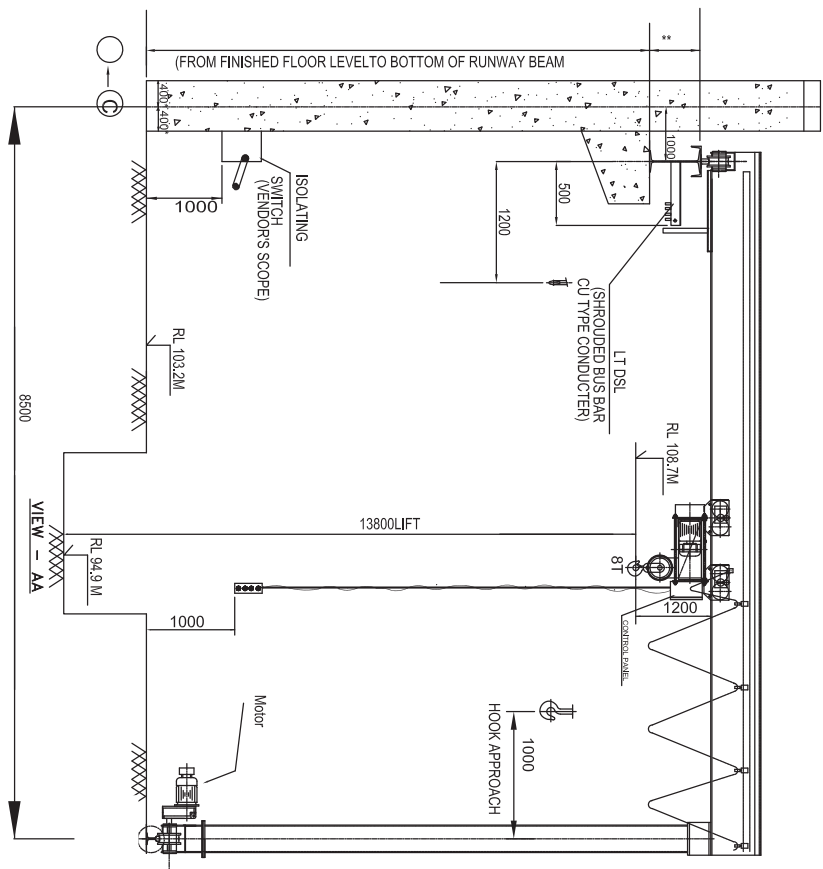

NOTE-

- 1 - ALL DIMENSIONS ARE IN MM.
- 2 - DSL(UT) => SHROUDED BUS BAR CONDUCTOR
- 3 - "" SUBJECT TO FINALISATION OF STRUCTURE
- 4 - DIMENSION MARKED AS(*) IS TO BE GIVEN BY THE VENDOR
- 5 - CRANE SHALL BE OUTDOOR TYPE
- 6 - CRANE WEIGHT= 5T (approx), HOIST WEIGHT = 0.75T (approx)

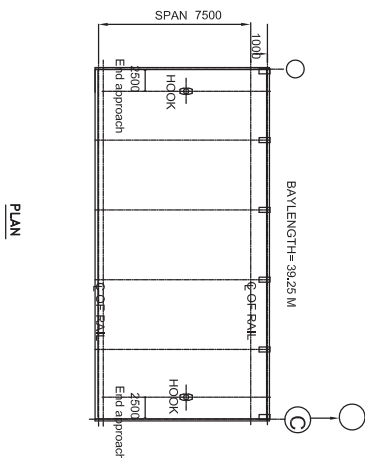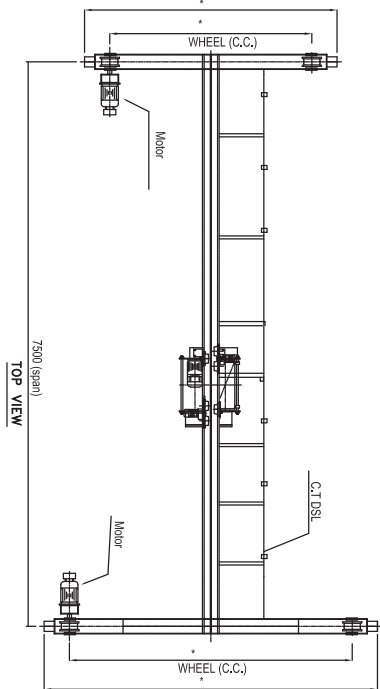


		TELECOMMA STATE POWER GENERATION CORPORATION LTD TELECOMMA STATE, INDIA 14000 NEW BONGHATOLA TINS SHAKH-13 UNIT-12, PUNJAB DELHIANET CONSULTANTS PVT. LTD. INDIA KHOLLA HAVELI, CHENNAI NEW DELHI BHARAT HEAVY ELECTRICALS LTD PROJECT ENGINEERING MANAGEMENT INDIA	
TELECOMMA STATE POWER GENERATION CORPORATION LTD TELECOMMA STATE, INDIA 14000 NEW BONGHATOLA TINS SHAKH-13 UNIT-12, PUNJAB DELHIANET CONSULTANTS PVT. LTD. INDIA KHOLLA HAVELI, CHENNAI NEW DELHI BHARAT HEAVY ELECTRICALS LTD PROJECT ENGINEERING MANAGEMENT INDIA		TELECOMMA STATE POWER GENERATION CORPORATION LTD TELECOMMA STATE, INDIA 14000 NEW BONGHATOLA TINS SHAKH-13 UNIT-12, PUNJAB DELHIANET CONSULTANTS PVT. LTD. INDIA KHOLLA HAVELI, CHENNAI NEW DELHI BHARAT HEAVY ELECTRICALS LTD PROJECT ENGINEERING MANAGEMENT INDIA	



- 2- DSL(UT) => SHROUDED BUS BAR CONDUCTOR
- 3- ** SUBJECT TO FINALISATION OF STRUCTURE
- 4- DIMENSION MARKED AS(*) IS TO BE GIVEN BY THE VENDOR
- 5- CRANE SHALL BE OUTDOOR TYPE

		TELECOMMA STATE POWER GENERATION CORPORATION LTD TELECOMMA STATE, INDIA 14000 NEW BONGHATOLA TINS SHAKH-13 UNIT-12, BONGHATOLA DELHATANT CONSULTANTS PVT. LTD. INDIA KHOLLA HATTA, CHENNAI NEW DELHI BHARAT HEAVY ELECTRICALS LTD PROJECT ENGINEERING MANAGEMENT INDIA	
TELECOMMA STATE POWER GENERATION CORPORATION LTD TELECOMMA STATE, INDIA 14000 NEW BONGHATOLA TINS SHAKH-13 UNIT-12, BONGHATOLA DELHATANT CONSULTANTS PVT. LTD. INDIA KHOLLA HATTA, CHENNAI NEW DELHI BHARAT HEAVY ELECTRICALS LTD PROJECT ENGINEERING MANAGEMENT INDIA		TELECOMMA STATE POWER GENERATION CORPORATION LTD TELECOMMA STATE, INDIA 14000 NEW BONGHATOLA TINS SHAKH-13 UNIT-12, BONGHATOLA DELHATANT CONSULTANTS PVT. LTD. INDIA KHOLLA HATTA, CHENNAI NEW DELHI BHARAT HEAVY ELECTRICALS LTD PROJECT ENGINEERING MANAGEMENT INDIA	

Fold-3

NOTES:

1. ALL DIMENSIONS ARE IN MM

162 of 163

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

COPY RIGHT AND CONFIDENTIAL

The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED it must not be used directly or indirectly in any way detrimental to the interest of the company.

COMPUTER FILE NAME : TAL5

KEY PLAN

TOP VIEW


Fold-2

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

[illegible]

DESIGN PARAMETERS			
A	9300		
B	*	A	
C	*		
D	12000		
E	5700		
F	*		
G	750		
H	1350		
L	1350	B	
M	*		
N	600		

CUSTOMER'S DRAWING NO. _____



NOTES:

1. ALL DIMENSIONS ARE IN MM

163 of 163



DEVELOPMENT CONSULTANTS CONSULTING ENGINEERS DEVELOPMENT CONSULTANTS PVT. LTD. KOLKATA, MADRAS, CHENNAI, NEW DELHI	DEVELOPMENT CONSULTANTS CONSULTING ENGINEERS DEVELOPMENT CONSULTANTS PVT. LTD. KOLKATA, MADRAS, CHENNAI, NEW DELHI	DEVELOPMENT CONSULTANTS CONSULTING ENGINEERS DEVELOPMENT CONSULTANTS PVT. LTD. KOLKATA, MADRAS, CHENNAI, NEW DELHI	DEVELOPMENT CONSULTANTS CONSULTING ENGINEERS DEVELOPMENT CONSULTANTS PVT. LTD. KOLKATA, MADRAS, CHENNAI, NEW DELHI


COPY HERE AND CONTINUE The information on this document is the property of BROWN ROOT ELECTRONICS LIMITED it must be used directly or indirectly in any way detrimental to the interest of the company.	DATE	13/11	20/11
	COMP	22/11	
	DESIGN	24/11	
	DOE		
	LA		
APPROV	14/11		

NOTES:


1. ALL DIMENSIONS ARE IN MM.



FRONT VIEW

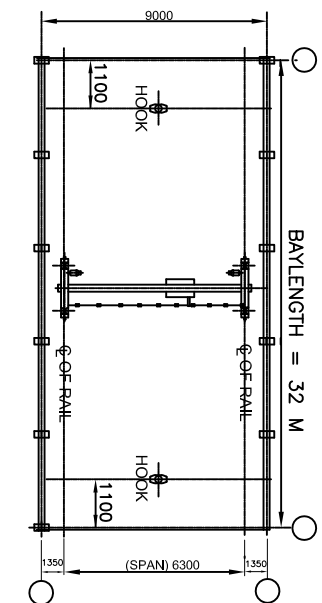

KEY PLAN

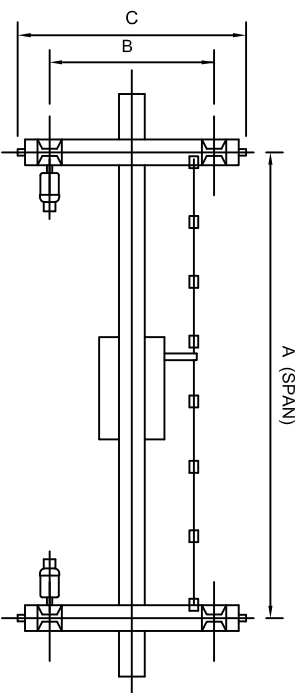

TOP VIEW