



Technical specification for
CONTROL & INSTRUMENTATION
4 X 270 MW BHADRADRI TPS

SPEC NO.: PE-TS-411-145-I

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

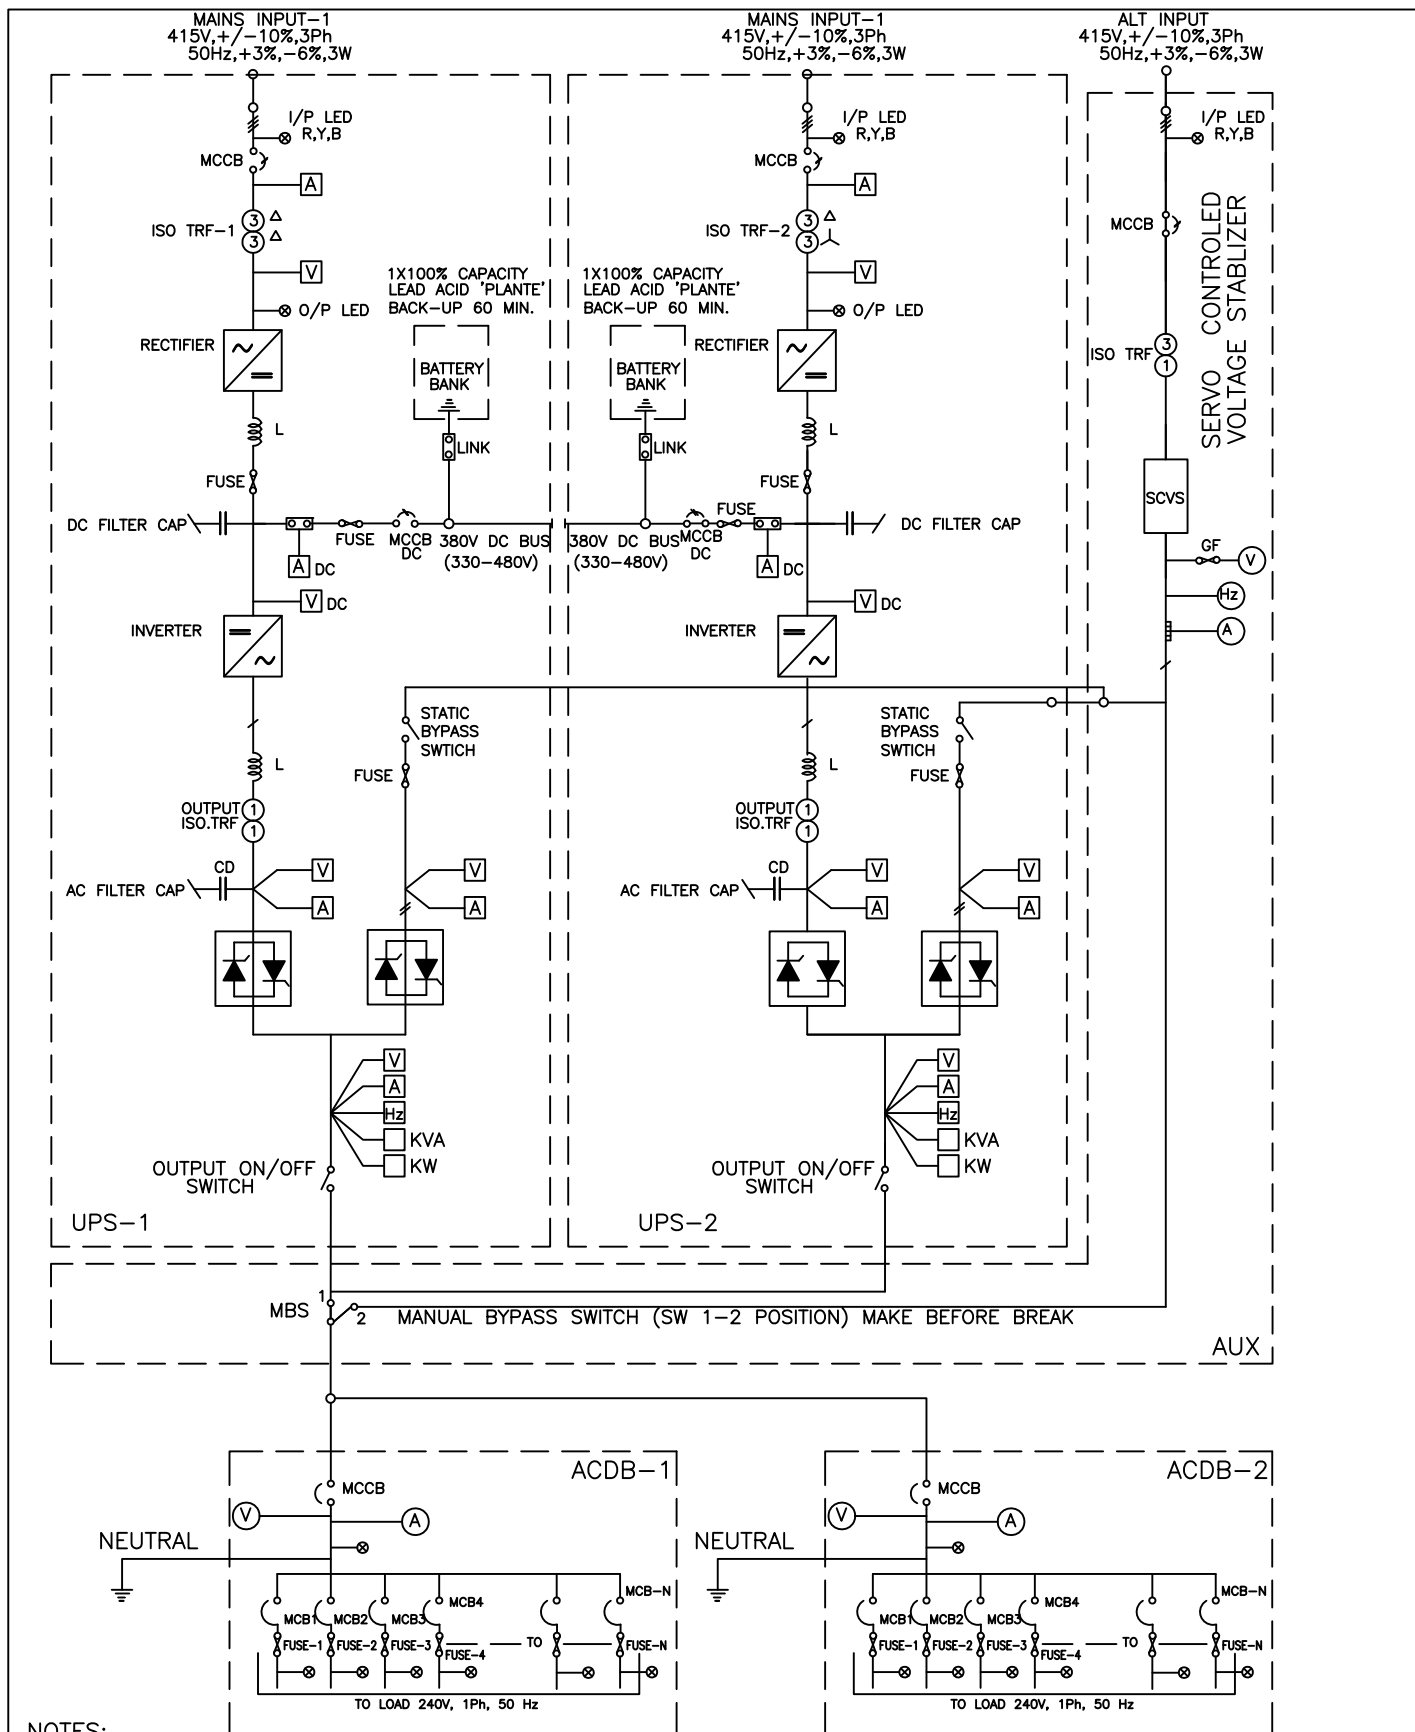
OF

UPS SCHEME


Arvind


S A Khan


Praveen Kishore



4 X 270 MW BHADRADRI TPS

TITLE:-

UPS SINGLE LINE DIAGRAM

DRG.
No.

PE-DG-411-145-I004

REV.
No.

00

DATE

21.03.2015

SHEET

2

OF

2



Technical specification for
CONTROL & INSTRUMENTATION
4 X 270 MW BHADRADRI TPS

SPEC NO.: PE-TS-411-145-I

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

INSTRUMENTATION DATA SHEET


Arvind


S A Khan


Praveen Kishore

1.00.00 SPECIFICATION FOR ELECTRONIC TRANSMITTERS

1.01.00 PRESSURE TRANSMITTER

1. Working Principle : Smart (HART Compatible)
2. Type : Microprocessor based, 2 – Wire
3. Output Signal : 4-20 mA DC along with superimposed digital signal
4. Measuring Element : Capsule / Diaphragm
5. Element material : SS-316 (Stainless Steel) or better
6. Static Pressure : 150 % of maximum span continuously, without affecting the calibration
7. Turn-down ratio : 100: 1
8. Span and Zero : Continuous, tamper proof, remote as well locally adjustable with zero elevation and suppression by 100% of span
9. Enclosure Class : IP-65 (Explosion proof for NEC Class-1, Division 1 area)
10. Output Indicator : LCD (Integral indicator of 5 digit display)
11. Nameplate : Tag number, service engraved in SS tag plate
12. Body : SS
13. Operating Voltage : 24V DC
14. Load : 600 Ohms (min.) at 24 Volts D.C.
15. Ambient Temperature : 0 - 50 °C
16. Performance: :
 - i. Accuracy : $\pm 0.075\%$ of Span or better

- ii. Repeatability : $\pm 0.05\%$ of Span or better
17. Sealing/Isolation : Extended diaphragm (Silicon oil/ Fluorolub filled) with 5 meters SS armoured capillary for corrosive/viscous/solid bearing or slurry type fluid applications
18. Accessories :
- a. Universal mounting bracket suitable for 2" pipe mounting
 - b. High tensile carbon steel U-bolts
 - c. Siphon for steam and hot water services
 - d. 1/2" NPT 2-valve stainless steel manifold, constructed from SS316 bar stock
 - e. Companion flange with nuts, bolts and gaskets
 - f. 1/2" NPT cable gland
 - g. Handheld calibrator
19. Adjustment/Calibration/ Maintenance : From handheld calibrator/ HART management system

Notes: For primary air/ secondary air/ flue gas applications, DP type transmitters shall be provided for pressure measurement. LVDT type is not acceptable.

1.02.00 DIFFERENTIAL PRESSURE TRANSMITTER / FLOW TRANSMITTER

- 1. Working Principle : Smart (HART Compatible)
- 2. Type : Microprocessor based, 2 – Wire
- 3. Output Signal : 4-20 mA DC along with superimposed digital signal
- 4. Measuring Element : Capsule / Diaphragm

5. Element material : SS-316 (Stainless Steel) or better
6. Static Pressure : 150 % of maximum span continuously, without affecting the calibration
7. Turn-down ratio : 100: 1
8. Span and Zero : Continuous, tamper proof, remote as well locally adjustable with zero elevation and suppression by 100% of span
9. Enclosure Class : IP-65 (Explosion proof for NEC Class-1, Division 1 area)
10. Output Indicator : LCD (Integral indicator of 5 digit display)
11. Nameplate : Tag number, service engraved in SS tag plate
12. Body : SS
13. Operating Voltage : 24V DC
14. Load : 600 Ohms (min.) at 24 Volts D.C.
15. Ambient Temperature : 0 - 50 °C
16. Performance:
 - i. Accuracy : $\pm 0.075\%$ of Span or better
 - ii. Repeatability : $\pm 0.05\%$ of Span or better
17. Sealing/Isolation : Extended diaphragm (Silicon oil/ Fluorolub filled) with 5 meters SS armoured capillary for corrosive/viscous/solid bearing or slurry type fluid applications
18. Accessories :
 - a. Universal mounting bracket suitable for 2" pipe mounting
 - b. High tensile carbon steel U-bolts

- c. Siphon for steam and hot water services
- d. ½" NPT 5-valve stainless steel manifold, constructed from SS316 bar stock
- e. Companion flange with nuts, bolts and gaskets
- f. ½" NPT cable gland
- g. Handheld calibrator

19. Adjustment/Calibration/ Maintenance : From handheld calibrator/ HART management system

1.03.00 Displacer Type Level Transmitters

- 1. Type : Smart (HART Compatible)
- 2. Stages of operation : Continuous
- 3. Material :
- 4. i. Displacer SS-316
- 5. ii. Suspension wire SS-316
- 6. iii. Torque tube housing SS
- 7. iv. Torque tube Inconel
- 8. v. Displacer chamber SS
- 9. vi. Transmitter Housing SS
- 10. Operating Voltage : 24 V DC
- 11. Transmission : Microprocessor based, 2-wire
- 12. Output Signal : 4-20 mA DC along with superimposed digital signal
- 13. Static / overload : Maximum static pressure without

	pressure	permanent deformation or loss of accuracy
14.	Turn-down ratio	: 10 : 1 or better
15.	Zero & Span	: Continuous, tamper proof, remote as well locally adjustable with zero elevation and suppression by 100% of span
16.	Enclosure Class	: IP-65
17.	Output Indicator	: LCD type (Integral indicator of 5 digit display)
18.	Nameplate	: Tag number and Service engraved in stainless steel tag plate
19.	Ambient Temperature	: 0 - 50 °C
20.	Load Impedance	: 600 Ohms at 24 Volts (minimum)
21.	Process Connection	: 2" Flanged
22.	Performance - Accuracy	: ± 0.075 % of span or better
23.	Accessories	: a) Counter Flange, nuts, bolts, gaskets etc b) Weights for 5 point calibration of instruments c) Vent and drain plugs d) 1/2" NPT Glands e) Handheld calibrator
24.	Preferred Features	: a) Test plug connection and cutout terminals physically separated from other electronics b) Electronic Damping facility (adjustable)
25.	Adjustment/Calibration/ Maintenance	: From handheld calibrator/ HART management system

- | | | |
|---------|----------------------------|--|
| | 26. Applications | : During detail engineering on Owner's approval |
| 1.04.00 | MASS FLOW METER | |
| 1.04.01 | SENSOR | |
| | 1. Measuring Principle | : Coriolis Mass flow |
| | 2. Primary Element | : Flow Tube of 316SS or better |
| | 3. Heating Arrangement | : Integral |
| | 4. Temperature Control | : For heavy fuel oil application |
| | 5. Process Connection | : Flanged of rating as per process requirement |
| | 6. Drain | : Self-draining facility |
| | 7. Enclosure | : Stainless steel |
| | 8. Accessories | : Counter flanges, Mounting nuts, bolts, gaskets etc. |
| 1.04.02 | TRANSMITTER | |
| | 1. Measured quantities | : Mass Flow rate, Total Mass Flow, Density |
| | 2. Input Signal Processing | : Smart (HART compatible) |
| | 3. Display | : LCD |
| | 4. Output | : 2 nos. isolated output of 4-20mA DC selectable from four measured quantities |
| | 5. Load | : < 750 ohms |
| | 6. Power supply | : 240V AC, 50 Hz |

7. Turn Down : 100:1
8. Accuracy : ± 0.2 % of measured value
9. Housing : IP 65 (Explosion proof)
10. Nameplate : Tag number, service engraved in stainless steel tag plate
11. Accessories :
 - a) Handheld calibrator
 - b) Mounting U-bolts, nuts, bolts, prefab cable etc
 - c) $\frac{1}{2}$ "NPT cable gland
12. Adjustment/Calibration/ Maintenance : From handheld calibrator/ HART management system
13. Applications : Fuel Oil service

1.05.00 RADAR TYPE LEVEL MEASUREMENT

1. Type : Smart (HART Compatible)
2. Antenna : Co axial / guided wave radar / Overspill protection
3. Principle : TDR (Time Domain Reflectometry)
4. Communication : Two wire 4-20mA DC with HART
5. Environmental temperature : 0 – 50 °C
6. Enclosure : IP-65 (Explosion proof for NEC Class-1, Division 1 area)
7. Calibration :
 - a) Self calibration with internal reference
 - b) Zero & Span calibration
8. Process Connection : External cage mounting
Flanged /screwed
9. Electronic Housing : Epoxy painted Die-Cast aluminium

- alloy
10. Antenna / Flange assembly : 316 SS or Hest alloy (as required)
 11. Power supply : 24 V DC
 12. Output Indicator : LCD
 13. Accuracy : 5 mm or 0.1% of probe length
 14. Accessories :
 - a) Handheld calibrator
 - b) Counter Flange, nuts, bolts, gaskets etc
 - c) ½"NPT cable gland
 - d) SS Nameplate
 15. Adjustment/Calibration/ Maintenance : From handheld calibrator/ HART management system
 16. Applications : Vessels under vacuum or low pressure applications, solid levels

1.06.00 ULTRASONIC LEVEL TRANSMITTER

1. Type : Microprocessor based, 2-wire, Smart (HART Compatible)
2. Operating Principle : Detection of reflected ultrasonic pulse
3. Output Signal : 4-20 mA DC along with superimposed digital signal
4. Operating frequency : 10 KHz to 50 KHz (typical)
5. Display : LCD
6. Temperature Compensation : Built in –Programmable
7. Power supply : 24 V DC
8. Enclosure : SS, IP-65 (Explosion proof for NEC Class-1, Division 1 area)

- | | | | | | | | | | | | | |
|--|--|--|----|---------------------|----|--|----|-------------------|----|--|----|--------------|
| 9. Zero & Span | : | Continuous, tamper proof, remote as well locally adjustable. It shall be possible to calibrate the instrument without any level in the sump/ tank | | | | | | | | | | |
| 10. Accuracy & Repeatability | : | 0.15 % of span or better | | | | | | | | | | |
| 11. Resolution | : | 0.1 % of span | | | | | | | | | | |
| 12. Operating temp. | : | Transmitter- 500 C and Sensor - 800 C | | | | | | | | | | |
| 13. MOC Sensor | : | SS-316/Body- PVC and Face – Polyurethane | | | | | | | | | | |
| 14. Mounting | : | 4" Flanged/ 2" NPT for sensor and Transmitter on panel | | | | | | | | | | |
| 15. Accessories | : | <table border="0"> <tr> <td>a)</td> <td>Handheld calibrator</td> </tr> <tr> <td>b)</td> <td>Weather canopy for protection from direct sunlight and direct rain</td> </tr> <tr> <td>c)</td> <td>½"NPT cable gland</td> </tr> <tr> <td>d)</td> <td>All mounting hardware (SS-316), Prefab cable</td> </tr> <tr> <td>e)</td> <td>SS Nameplate</td> </tr> </table> | a) | Handheld calibrator | b) | Weather canopy for protection from direct sunlight and direct rain | c) | ½"NPT cable gland | d) | All mounting hardware (SS-316), Prefab cable | e) | SS Nameplate |
| a) | Handheld calibrator | | | | | | | | | | | |
| b) | Weather canopy for protection from direct sunlight and direct rain | | | | | | | | | | | |
| c) | ½"NPT cable gland | | | | | | | | | | | |
| d) | All mounting hardware (SS-316), Prefab cable | | | | | | | | | | | |
| e) | SS Nameplate | | | | | | | | | | | |
| 16. Diagnosis | : | On-line | | | | | | | | | | |
| 17. Status Indication | : | Power On, HI, HI-HI, Lo, LO-LO, Fault | | | | | | | | | | |
| 18. Output Contacts | : | 2 SPDT, 230V, 5A | | | | | | | | | | |
| 19. Adjustment/Calibration/ /Maintenance | : | From handheld calibrator/ HART management system | | | | | | | | | | |
| 20. Applications | : | Coal Bunker, Water Service etc. | | | | | | | | | | |

1.07.00 ULTRASONIC FLOW TRANSMITTER

1. Type : Ultrasonic – Clamp On
2. Accuracy : +/- 1 % of reading
3. Repeatability : +/- 0.3 % of reading
4. Rangeability : 400 : 1
5. Output Signal : 4-20 mA DC with HART
6. Measured Parameter : Volumetric flow, Totalized flow and flow Velocity
7. Display : LCD with internal Key Pad (Flow rate & Totalization)
8. Power Supply : 24 V DC (2 Wire)
9. Enclosure : SS (IP- 68 – Submersible)
10. Mounting : SS Chain or Strap
11. Accessories
 1. Handheld calibrator
 2. ½"NPT cable gland
 3. Transducer cable
 4. All mounting hardware (SS-316)
 5. SS Nameplate
12. Adjustment/Calibration/ Maintenance : From handheld calibrator/ HART management system
13. Applications : Plant water service

Note: Multi-path insertion type (minimum 4 path) Ultrasonic Flow meter shall be provided for Raw water/ Cooling Water flow measurements.

2.00.00 HART HAND HELD CALIBRATOR

Hand held calibrators (5 nos. for each type) shall be provided for adjustment/ calibration/maintenance of the HART compatible

transmitters. The hand held calibrator shall be suitable for all types of transmitters supplied in the package. If one type of hand held type calibrator is not suitable for communicating with all types of transmitters then separate hand held calibrator will be provided.

3.00.00 PROCESS ACTUATED SWITCHES

3.01.00 PRESSURE SWITCH

1. Type :
 - i. Piston for high pressure application
 - ii. Bellow / Diaphragm for low pressure application
2. Sensing element : SS-316.
material All other wetted part SS316
3. Case Material : SS
4. Setter Scale : Black graduation on white linear scale.
Graduation 0-100% with red pointer for set points
5. Over range : 150 % of maximum pressure
6. Adjustments :
 - a) Internal Set Point
 - b) Differential adjustment
7. End Connection : 1/2" NPT bottom connected
8. Switch configuration : Two SPDT (240V, 5A AC/220V, 0.5A DC)
9. Switch Type : Snap acting, shock & vibration proof
10. Terminal Block : Suitable for full ring lugs
11. Enclosure Class : IP-65 (Explosion proof for NEC Class-1, Division 1 area)
12. Performance :
 - a) Repeat accuracy $\pm 1.0\%$
 - b) Accuracy of Setting Indication of $\pm 1.5\%$
13. Ambient temperature : 0 – 50 Deg.C

14. Nameplate : Tag number, service engraved in SS tag plate
15. Accessories : a) Silicon oil/ Fluorolub filled Remote diaphragm seal with SS-316 capillary for corrosive/ viscous/ solid bearing or slurry type fluid applications
b) Snubbers for pulsating fluid applications
c) Siphons for steam and hot water services
d) Retention ring and screws for surface mounting
e) 1/2" NPT 2 Valve SS-316 barstock manifold
f) 1/2" NPT cable gland
16. Applications : During Detail Engineering on Owner's approval

3.02.00 DIFFERENTIAL PRESSURE SWITCH

1. Type : i. Piston for high pressure application
ii. Bellow / Diaphragm for low pressure application
2. Sensing element : SS-316.
material All other wetted part SS316
3. Case Material : SS
4. Setter Scale : Black graduation on white linear scale. Graduation 0-100% with red pointer for set points
5. Over range : 150 % of maximum pressure

- | | | |
|-------------------------|---|--|
| 6. Adjustments | : | a) Internal Set Point |
| | : | b) Differential adjustment |
| 7. End Connection | : | 1/2" NPT bottom/ back connected |
| 8. Switch configuration | : | Two SPDT (240V, 5A AC/220V, 0.5A DC) |
| 9. Switch Type | : | Snap acting, shock & vibration proof |
| 10. Terminal Block | : | Suitable for full ring lugs |
| 11. Enclosure Class | : | IP-65 (Explosion proof for NEC Class-1, Division 1 area) |
| 12. Performance | : | a) Repeat accuracy $\pm 1.0\%$ |
| | : | b) Accuracy of Setting Indication of $\pm 1.5\%$ |
| 13. Ambient temperature | : | 0 – 50 Deg.C |
| 14. Nameplate | : | Tag number, service engraved in SS tag plate |
| 15. Accessories | : | a) Silicon oil/ Fluorolub filled Remote diaphragm seal with SS-316 capillary Diaphragm seals for corrosive/ viscous/ solid bearing or slurry type fluid applications |
| | : | b) Snubbers for pulsating fluid applications |
| | : | c) Siphons for steam and hot water services |
| | : | d) Retention ring and screws for surface mounting |
| | : | e) 1/2" NPT 5 Valve SS-316 barstock manifold |
| | : | f) 1/2" NPT cable gland |
| 16. Applications | : | During Detail Engineering on Owner's |

approval

3.03.00 LEVEL SWITCH

3.03.01 FLOAT OPERATED

1. Float material : SS-316
2. Wetted parts : SS-316
3. Float chamber : Stainless steel/Carbon steel,
construction welded
4. Float chamber : Side mounted
mounting
5. Fluid connection : Side – Side
6. Fluid connection size : 1" ANSI RF Flange (rubber line, if
required)
7. Drain : ½ inch NPT with Plug
8. Pressure rating of
chamber : Minimum 1.5 times of design pressure
9. Repeatability : +/- 1.5 mm or better
10. Switch housing : Stainless Steel
11. Switch housing type : IP- 65
12. Type of switch : Snap acting magnetically operated
hermetically sealed
13. Switch configuration : 2 SPDT (5A, 240 V AC, 0.5A, 220V DC)
14. Accessories : a) Counter flange, nuts
& bolts, suitable
gasket etc.
b) Steel globe type
drain valve
c) ½"NPT cable gland

d) Stainless steel nameplate with alpha-numeric engraved for service and tag

15. Application : During Detail Engineering on Owner's approval

3.04.00 FLOW SWITCH

1. Type : Paddle /Piston/Disk
2. Wetted part material : Stainless steel or Hastelloy for acidic application
3. End connection :
 - a) Threaded upto 1" line size with integral Tee
 - b) Flanged for line size > 1 ½"
4. Enclosure material : Stainless Steel
5. Enclosure class : IP 65
6. Switch configuration : 2 SPDT (5A, 240 V AC, 0.5A, 220V DC)
7. Repeatability : 2%
8. Cable connection : ½"NPTF
9. Accessories :
 - a) Tee, Counter flange, nuts & bolts, suitable gasket etc
 - b) ½"NPT cable gland
 - c) Stainless steel nameplate with alpha-numeric engraved for service and tag

3.05.00 RF LEVEL SWITCH

1. Type : RADIO FREQUENCY
Sensing probe
2. Material : SS-316
3. Mounting : Threaded
4. Application : 250°C (Max.)
Temperature
Electronic Controller
5. Input Supply Voltage : 240V AC $\pm$ 10%, 50 Hz.
6. Relay Output : 2 SPDT (240V AC, 5A)
7. Ambient Temperature : 50 °C
8. Enclosure Protection : IP-66
9. Enclosure Housing : SS
Normal Level
10. Local LED Indication : Power On
Alarm Level
Probe Healthy
11. Switching Repeatability : $\pm$ 0.5%
Co-axial cable for probe connection to controller
12. Accessories : SS Tag plate
 $\frac{1}{2}$ " NPT Cable Glands
13. Application : Solid level

3.06.00 CONDUCTIVITY TYPE LEVEL SWITCH

1. Type : Conductivity discrimination
2. Probe MOC : SS-316
3. Mounting : Flanged on external cage
4. Application : 250°C (Max.)
Temperature
5. Test Pressure : Two times rated pressure

6. Input Supply Voltage : 240V AC $\pm 10\%$, 50 Hz.
Four independent channel with
7. Input : selectable switching threshold for water conductivity
8. Relay Output : 2 SPDT (240V AC, 5A)
9. Ambient Temperature : 50 °C
10. Enclosure Protection : IP-65 (Explosion proof for NEC Class-1, Division-1 area)
11. Enclosure Housing : SS
HI,LO, HIGH-HIGH, LOW-LOW
12. Local LED Indication : Power
Fault
13. Accessories :
 - a) Interconnecting cable from probe to electronics
 - b) Mounting accessories
 - c) External cage
 - d) Washer & Gasket
 - e) $\frac{1}{2}$ " NPT Cable Glands
 - f) SS Tag Plate
14. Application : During Detail Engineering on Owner's approval

3.07.00 TEMPERATURE SWITCH

1. Type : Bimetallic or gas filled
2. Sensing Element : SS-316
Material
3. Bulb Material : SS-316
4. Capillary : Stainless Steel armored

5. Movement Material : Stainless Steel
6. Case material : Stainless Steel with neoprene gasket and clear glass where applicable cover conforming to IP-65. (Explosion proof for NEC Class-1, Division 1 area).
- 7.. Scale : Black graduation on white linear scale. Graduation 0-100% with red pointer for set points
8. Over range Protection : 120 %
9. Instrument connection : Bottom
10. Switch configuration : Two SPDT (240V, 5A AC/220V, 0.5A DC)
11. Switch type : Snap acting, shock and vibration-proof
12. Adjustability : Internal Set point adjustable over span range
13. Compensation :
 - a) Capillary compensation with invar wire throughout the capillary length
 - b) Case compensation
14. Performance
 - a) Scale Accuracy : ± 1.0 % of full scale
 - b) Repeatability : < 0.5 % of full range
 - c) Response time : Less than 40 seconds with thermowell
15. Capillary length : 5 meters (minimum) for local mounting/15 meters for local panel mounting
16. Nameplate : Tag number, service engraved in stainless steel tag plate
17. Accessories : Mounting accessories, $\frac{1}{2}$ " NPT cable gland
18. Applications : During Detail Engineering on Owner's

approval

4.00.00 **LOCAL INSTRUMENTS**

4.01.00 PRESSURE GAUGE AND DIFFERENTIAL PRESSURE GAUGE

1. Type : Bourdon/Bellows/Diaphragm
2. Sensing & Socket : SS-316
3. Movement Material : SS-316
4. Case Material : Stainless steel. IP-65 (Explosion proof for NEC Class-1, Division 1 area)
5. Dial Size : Generally 150 mm
6. Scale : Black lettering on white in 270 O arc.
7. Window : Shatterproof glass
8. Range Selection : Normal process pressure: 50~70 % of range
9. Over-range Protection : 125% of maximum range by internal stop. External stop at zero
For Zero adjustment (Micrometer screw external)
10. Adjustment : For Range adjustment (Micrometer screw internal).
11. Element Connection : Argon welding
12. Process Connection : 1/2" NPT (M) Bottom for local, back for panel mounting
13. Performance : Accuracy of ± 1.0 % of span or better
14. Operating ambient : 0 - 50 °C
15. Safety Feature : Blow out disc /diaphragm at the back
16. Accessories :
 - a) Snubbers for pulsating fluid application. discharge
 - b) Stainless steel Diaphragm seals

- for corrosive/ viscous/ solid bearing or slurry type fluid applications
- c) 3-Way SS316 Gauge cock for pressure gauges
- 5-valve SS316 manifold from
- d) barstock for differential pressure gauge
- e) Siphons for steam and hot water services
17. Nameplate : Tag number, service engraved in stainless steel tag plate

4.02.00 LEVEL INDICATOR (FLOAT & BOARD TYPE)

1. Type : Float and Board
2. Float Material : SS-316
3. Float Cable : SS-316
4. Indicator Assembly : Epoxy painted Aluminium
5. Guide wire spring assembly : SS-316 (2 Nos.)
6. Guide Wire Anchor : SS-316
7. Scale Board : Anodized Aluminium with engraved marking (Minimum graduation 10mm), mounting brackets and suitable hardware required as per tank height
8. Elbow Assembly : Anodized Aluminium
9. Flanges : RF , ANSI 150 , SS (3 Nos.)
10. Accuracy : ± 10 mm or better
11. Accessories : All mounting accessories including counter flange, nuts & bolts, suitable

gasket etc. as applicable, SS Tag plate

4.03.00 GAUGE GLASS

1. Type : Reflex /Transparent
2. Material :
Glass : Toughened borosilicate resistant to thermal shock
Body Material : ~~Carbon Steel~~ Stainless Steel
Enclosure : IP-65 (Explosion proof for NEC Class-1, Division 1 area)
3. Integral cocks & valves/Fittings :
i. SS 316
Rubber lined corrosion resistant
4. :
ii. stainless steel (for DM/RO service)
5. Vessel Connection : ANSI Flanged SS316
6. Accessories :
i. Integral cocks
ii. Drain Valves
iii. Companion Flanges, Bolts, nuts, gaskets, SS Tag plate
iv. Illuminating lamps, Mica shield as required
v. Calibrated scale
7. Pressure rating : Twice the maximum working pressure
8. Temperature : 300 °C
For larger lengths (greater than 1200mm), additional gauge glasses
9. Other details : shall be provided with minimum of 50 mm overlap.

- 4.04.00 SLIGHT GLASS
1. Type : Flap-type.
 2. End connection : Screwed / Flanged
 3. Material
 - a) Body : SS- 304
 - b) Cover plate : SS- 304
 - c) Indicator : SS- 316
 4. Sight Glass : Toughened Borosilicate
 5. Gasket : Neoprene
 6. Bolts & Nuts : High tensile steel.
 7. Hydraulic Test Pressure : 1.5 times maximum working pressure
 8. Accessories : Companion Flanges, Bolts, nuts, gaskets as required, SS Tag plate.
- 4.05.00 ROTAMETER
1. Type : ON-LINE for line upto and including 50 mm NB.
: Borosilicate BY-PASS for line size above 50 NB
 2. Metering tube : Toughened Borosilicate
 3. Float : SS-316
 4. End fittings : SS-316
 5. Packing material : Teflon / PTFE
 6. Casing : Stainless Steel
 7. Gland Rings : Stainless Steel
/Followers/ Other :
wetted parts
 8. Orifice Plate : Stainless Steel (for bypass type)
 9. Operating Temperature : 0-50 Deg. c

- | | | |
|------------------------|---|--|
| 10. Test Pressure | : | 200% of maximum operating pressure |
| 11. Scale | : | 250 mm nominal length |
| 12. Graduation | : | Direct reading |
| 13. Process Connection | : | Flanged (RF) to line size as per ANSI standards (150#) |
| 14. Tapping | : | D & D/2 |
| 15. Accuracy | : | +/- 2% of full scale reading |
| 16. Reproducibility | : | Within 0.5% of instantaneous reading |
| 17. Accessories | : | SS Tag Plate, orifice plate |

5.00.00 **TEMPERATURE ELEMENTS & ACCESSORIES**

5.01.00 RESISTANCE TEMPERATURE DETECTOR

- | | | |
|----------------------------------|---|--|
| 1. Type | : | Platinum (Duplex), Ungrounded |
| 2. Platinum (Duplex), Ungrounded | : | 100 ohm at 0 °C |
| 3. Base | : | Wound on ceramic (anti-inductive) |
| 4. Wiring | : | 3 Wire |
| 5. Protecting Tube | | |
| a) O.D. | : | 6 mm |
| b) Material | : | SS-316, Seamless |
| c) Filling | : | Magnesium oxide (Purity above 99.4%). |
| 6. Response time | : | a) 15 sec. (bare).
b) 30 sec. (with thermowell) |
| 7. Calibration | : | DIN 43760 |
| 8. Accuracy | : | ± 0.5% |
| 9. Head | | |
| a) Type | : | IP-65 universal screwed type |

- b) Material : Stainless Steel
- c) Terminal blocks : Nickel plated Brass-screw type / silver plated
- d) Cable connection : ½" NPT gland and grommet
- e) Others : Terminal head cover with SS chain and suitable gasket.

Head of TE to be provided with sufficient space and arrangement to mount head mounted temperature transmitter (as applicable).

- 10. Accessories :
 - a) Adjustable nipple-union-nipple [1/2" Sch 80 X ½" NPT] with thermowell connection
 - b) Compression fittings/unions
 - c) Flanges etc. (for flanged connections only)
 - d) Thermowell (As specified below)
- 11. Thermowell connection : ½" NPT (M) or 150 RF Flanged
- 12. Nameplate : Tag number, service engraved in stainless steel tag plate

Note: The specifications for RTDs of winding/ bearing of motor/pump, can be as per their manufacturer standards. The manufacturer shall submit the adequate supporting documents for establishing their standard practice. However, the type of RTD shall be Pt-100.

5.02.00 THERMOCOUPLES

1. Type :
 - a) 16 SWG wire of Chromel AlumeI) (Type-K)
 - b) Duplex
 - c) Ungrounded
2. Protecting Tube
 - a) O.D. : 6 mm
 - b) Material : SS-316, Seamless
 - c) Filling : Magnesium oxide (Purity above 99.4%).
3. Response time :
 - a) < 20 seconds for measurement
 - b) < 10 seconds for control
4. Accuracy : $\pm 1.1^{\circ}\text{C}$ up to 300°C & 0.4% of measured temperature range above 300°C
5. Head
 - a) Type : IP-65 universal screwed type
 - b) Material : Stainless Steel
 - c) Terminal blocks : Nickel plated Brass-screw type / silver plated
 - d) Cable connection : $\frac{1}{2}$ " NPT gland and grommet
6.
 - e) Others : Terminal head cover with SS chain and suitable gasket.

Head of TE to be provided with sufficient space and arrangement to mount head mounted temperature transmitter (as applicable).

7. Accessories :
 - a) Adjustable nipple-union-nipple [1/2" Sch 80 X 1/2" NPT] with thermowell connection
 - b) Compression fittings/unions
 - c) Flanges etc. (for flanged connections only)
 - d) Thermowell (As specified below)
8. Thermowell connection : 1/2" NPT (M) or 150 RF Flanged
9. Nameplate : Tag number, service engraved in stainless steel tag plate

5.03.00 TEMPERATURE GAUGE

1. Type : Expansion type (Liquid filled system)
2. Sensing Element : Bourdon – SS-316
3. Material : SS-316
4. Bulb and Capillary : SS-316
5. Capillary Tubing : Inner sheath - solid drawn Material
Outer sheath - PVC tube
6. Movement Materials : Stainless Steel / Direct Bourdon tip connection to pointer spindle
7. Case Material : Stainless Steel stove enameled, black finish, threaded bezel ring, clear glass

- cover conforming to IP 65.
7. Dial size : 150 mm
 8. Scale : Black lettering on white background in 270 Deg.C arc
 9. Over range protection : 125 percent of FSD
 10. Capillary Glanding : 1/2" NPT(M) x compression fitting (SS) to suit capillary
 11. Instrument Connection : Bottom connection for local mounting, back connection for panel mounting
 12. Process Connection : 1/2" NPT (M) or 150 RF Flanged
 13. Extension Neck Length : 50 mm
 14. Compensation : a) Capillary compensation
 15. : b) Case compensation
 16. Performance : a) Accuracy : + /- 1.0 percent of full scale Deflection
 - : b) Repeatability : Less than 0.5 percent of full range
 - : c) Response time: 15 seconds (max.).
 17. Capillary length : 3.0 meters (local) / 15.0 metres (local panel)
 18. Other features : Shatter proof glass
 19. Nameplate : Tag number, service engraved in stainless steel tag plate
 20. Accessories : SS316 Thermowell

5.04.00 THERMOWELL

1. Material : SS-316
2. Manufacture : Drilled from bar stock, Hex Head, Tapered design (As per ASME PTC 19.3)

3. Process connection : M33x2
4. Certification : Not applicable
5. Bore concentricity : +5% of wall thickness
6. Identification mark : Tag number punched on head
7. Surface treatment : Polish after machining
8. Element connection : ½" NPT (M) or 150 RF Flanged
9. Head : Hex
10. Length of the hex head : 31.75 mm (min.)
11. Accessories : SS Plug and chain for test thermo wells
SS Nameplate, Flange with companion
flange & all required accessories for
flanged connections.

Note: Wake frequency calculations shall be furnished for all thermowells for approval.

Thermowells shall be designed such that the resonant frequency is above the exciting frequencies generated by vortex shedding in the process fluid.

5.05.00 METAL TEMPERATURE THERMOCOUPLE

1. Measuring medium : Metal temperature
2. Type : Chromel Alumel (Type-K)
Duplex, Ungrounded
3. Insulation : Mineral Insulation Magnesium Oxide
4. Wire gauge : 16 AWG
5. Protective sheath : SS
6. Protective sheath :
diameter : 8 mm O.D.
7. Characteristics : Special limits of error as in ANSI
thermocouple MC 96.01
8. Accessories : ½" BSP SS sliding end connector, weld
pad, clamps of heat resistant steel

1. Type : Hydrometer Type
2. Mounting : On line
3. Accuracy : +/- 2% of range
4. Scale : Black letter on white scale
5. End connection : PVC flange

9.06.00 DENSITY/ CONCENTRATION METER

1. Wetted Part : Stainless Steel
2. Enclosure : Stainless Steel (IP-65)
3. Power Supply : 24 V DC
4. Output signal : 4-20 mA DC (isolated) into 600 ohms
5. Accuracy : ± 0.001 g/cc
6. Indication : LCD display
7. Temp. Compensation : Integral
8. Accessories : Mounting hardware, integral amplifier (if required), cable glands, tag plate etc.


10.00.00 SOLENOID VALVES

1. Operating Principle : Electromagnetic (noiseless)
2. Coil voltage rating : 240 V AC /24 V DC (as required)
3. Ways : 2/3/4 way
4. Port size : 1/4" NPT all ports
5. Body : SS bar stock
- Trim : SS-316
6. Duty : Suitable for continuous energization
7. Sealing : Airtight and leak proof
8. Ambient Temperature : 0 - 50 ° C

-
- | | | | |
|-----|-------------------|---|--|
| 9. | Fluid Temperature | : | 0-150 ° C (approx.) |
| 10. | Coil Enclosure | : | Stainless Steel |
| 11. | Insulation | : | Class-H |
| 12. | Coil Casing | : | IP-65 (Explosion proof for NEC Class-1, Division-1 area) |
| 13. | Mounting | : | On pipe or on panel |
| 14. | Cable Connection | : | ½" NPT |
| 15. | Accessories | : | Cable glands, SS Tag plate |


Arvind


S A Khan


Praveen Kishore



Technical specification for
CONTROL & INSTRUMENTATION

4 X 270 MW BHADRADRI TPS

SPEC NO.: PE-TS-411-145-I

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

Instrumentation Check List


Arvind


S A Khan


Praveen Kishore



STANDARD CHECK LIST FOR C&I INSTRUMENTS (for Maux Pkgs)

CHECK LIST FOR PRESSURE SWITCH

Sl. No.	Test / Checks	Quantum of check	Reference Doc. / Acceptance Norms	Agency **			Remarks
				M	C	B	
1	CHECK FOR	SEE NOTE-1 BELOW	APPROVED SPEC./ DATA SHEETS	P	V	V	
	1.1 MODEL NO/TAG NO						
	1.2 RANGE						
	1.3 END CONN						
	1.4 NO. OF CONTACT						
2	CALIBRATION			P	V	V	
	2.1 REPEATABILITY						
	2.2 SET POINT ADJUSTMENT						
	2.3 DIFFERENTIAL						
3	OVER PR & LEAK TEST				P	V	V
4	ELECT. INSULATION/HV TEST	ONE		P	V	V	
5	REVIEW OF TC FOR MATERIALS OF	FOR LOT		V	V	V	
	5.1 SENSOR						
	5.2 MOVEMENT						
	5.3 PROCESS CONNECTION						
	5.4 HOUSING						
6	REVIEW OF TC FOR DEGREE OF PROTECTION	TYPE TEST		V	V	V	
7	REVIEW OF TC OF MICROSWITCH	FOR LOT		V	V	V	


** M = Manufacturer / Sub-contractor, C = Contractor / Nominated Inspecting Agency, B = BHEL, P = Perform, W = Witness, V = Verification

Note :

- Quantum of check shall be as below :
100 % - By Manufacturer
- Manufacturer to carry out ROUTINE TEST on 100 %.
- Contractor to provide compliance certificate for tests/checks verified by contractor and the same alongwith test certificates to be verified by BHEL


Arvind


S A Khan


Praveen Kishore



STANDARD CHECK LIST FOR C&I INSTRUMENTS (for Maux Pkgs)

CHECK LIST FOR TRANSMITTER

Sl. No.	Test / Checks	Quantum of check	Reference Doc. / Acceptance Norms	Agency **			Remarks
				M	C	B	
1	CHECKS FOR	SEE NOTE-1 BELOW	APPROVED SPEC./ DATA SHEETS	P	W	V	
	VISUAL.						
	MODEL/TAG No						
2	PROCESS CONNECTION			P	W	V	
3	ACCURACY			P	W	V	
4	REPEATABILITY			P	W	V	
5	HYSTERESIS			P	W	V	
6	EFFECT OF TEMP VARIATION ON ACCURACY			P	W	V	
7	SPAN / ZERO ADJUSTMENT	ONE / TYPE		P	W	V	
8	EFFECT OF SUPPLY VOLTAGE VARIATION			P	W	V	
9	EFFECT OF LOADING (500 OHM METERS)			P	W	V	
10	HIGH PRESSURE TEST	SEE NOTE-1 BELOW		P	W	V	
11	BURN-IN TEST	ONE / TYPE		P	W	V	
12	DEGREE OF PROTECTION			P	W	V	
13	ACCESSORIES AS APPLICABLE	SEE NOTE-1 BELOW		V	V	V	

Legend :

** M = Manufacturer / Sub-contractor, C = Contractor / Nominated Inspecting Agency, B = BHEL, P = Perform, W = Witness, V = Verification

Note :

- Quantum of check shall be as below :
100 % - By Manufacturer
- Manufacturer to maintain calibrated instrument having better accuracy than the item under test. Inspecting engineer shall check the same.
- When material correlation are not available manufacturer's compliance to be provided.
- Contractor to provide compliance certificate for tests/checks verified by contractor and submit the same alongwith test certificates to be verified by BHEL.

Arvind

S A Khan

Praveen Kishore



STANDARD CHECK LIST FOR C&I INSTRUMENTS (for Maux Pkgs)

CHECK LIST FOR PRESSURE & DP GAUGE

Sl. No.	Test / Checks	Quantum of check	Reference Doc. / Acceptance Norms	Agency **			Remarks
				M	C	B	
1	CHECK FOR	SEE NOTE-1 BELOW	APPROVED SPEC./ DATA SHEETS	P	W	V	
	SENSOR TYPE						
	DIAL SIZE						
	MODEL NO/TAG NO						
	RANGE/SCALE						
	SWITCH CONTACT RATING & NOS.						
	END CONNECTION						
2	CALIBRATION	ONE		P	W	V	
	ACCURACY						
	REPEATABILITY						
	SET POINT ADJUSTMENT						
3	OVER PRESSURE & LEAK TEST	FOR LOT	P	W	V		
4	OPERATION OF PRESSURE. RELIEF DEVICE	TYPE TEST	P	W	V		
5	REVIEW OF TC FOR	SEE NOTE-1 BELOW	V	V	V		
	MATERIALS OF SENSOR						
	MOVEMENT						
	PROCESS CONNECTION						
	HOUSING						
6	REVIEW OF TC FOR DEGREE OF PROTECTION		V	V	V		
7	ACCESSORIES AS APPLICABLE		V	V	V		

Legend :


** M = Manufacturer / Sub-contractor, C = Contractor / Nominated Inspecting Agency, B = BHEL, P = Perform, W = Witness, V = Verification

Note :

- Quantum of check shall be as below :
100 % - By Manufacturer
- Manufacturer to maintain calibrated instrument having better accuracy than the item under test. Inspecting engineer shall check the same.
- Manufacturer to carry out ROUTINE TEST on 100 %.
- When material correlation is not available, MFR's compliance to be provided
- Contractor to provide compliance certificate for tests/checks verified by contractor and submit the same alongwith test certificates to be verified by BHEL.


Arvind


S A Khan


Praveen Kishore



STANDARD CHECK LIST FOR C&I INSTRUMENTS (for Maux Pkgs)

CHECK LIST FOR LEVEL GAUGE

Sl. No.	Test / Checks	Quantum of check	Reference Doc. / Acceptance Norms	Agency **			Remarks
				M	C	B	
1	CHECK FOR	SEE NOTE-1 BELOW	APPROVED SPEC./ DATA SHEETS / DRWGS	P	W	V	
	TYPE						
	MODEL/ TAG NO.						
	DAIL SIZE						
	RANGE/SCALE						
	END CONNECTION						
2	DIMENSIONS, PROCESS CONNECTION	ONE / LOT		P	W	V	
3	ACCURACY			P	W	V	
4	MATERIAL TC FOR			P	V	V	
	BODY ISO.						
	VALVE						
	GAUGE GLASS						
5	HYD. TEST	SEE NOTE-1 BELOW		P	W	V	
6	ACCESSORIES AS APPLICABLE			P	W	V	

Legend :


** M = Manufacturer / Sub-contractor, C = Contractor / Nominated Inspecting Agency, B = BHEL, P = Perform, W = Witness, V = Verification

Note :

- Quantum of check shall be as below :
100 % - By Manufacturer
- Manufacturer to maintain calibrated instrument having better accuracy than the item under test. Inspecting engineer shall check the same.
- Manufacturer to carry out ROUTINE TEST on 100 %.
- Contractor to provide compliance certificate for tests/checks verified by contractor and submit the same alongwith test certificates to be verified by BHEL.


Arvind


S A Khan


Praveen Kishore



STANDARD CHECK LIST FOR C&I INSTRUMENTS (for Maux Pkgs)

CHECK LIST FOR ANNUNCIATORS

Sl. No.	Test / Checks	Quantum of check	Reference Doc. / Acceptance Norms	Agency **			Remarks
				M	C	B	
1	CHECK FOR	SEE NOTE-1 BELOW	APPROVED SPEC./ DATA SHEETS	P	W	V	
	TYPE/ MODEL						
	DIMENSIONS OF HARDWARE						
	MODULARITY						
	SEQUENCE						
	FACIA DETAILS						
2	FUNCTIONAL TEST	100%		P	W	V	
3	IMMUNE TO STEP VARIATIONS IN THE POWER SUPPLY	SEE NOTE-1 BELOW		P	W	V	
4	DEGREE OF PROTECTION FOR ENCLOSURE	TYPE TEST		P	W	V	
5	I/R CHECK	SEE NOTE-1 BELOW		P	W	V	
6	RESPONSE			P	W	V	

Legend :

** M = Manufacturer / Sub-contractor, C = Contractor / Nominated Inspecting Agency, B = BHEL, P = Perform, W = Witness, V = Verification

Note :

- Quantum of check shall be as below :
100 % - By Manufacturer
- Manufacturer to maintain calibrated instrument having better accuracy than the item under test. Inspecting engineer shall check the same.
- Manufacturer to carry out ROUTINE TEST on 100 %.
- Contractor to provide compliance certificate for tests/checks verified by contractor and submit the same alongwith test certificates to be verified by BHEL.

Arvind

S A Khan

Praveen Kishore



Technical specification for
CONTROL & INSTRUMENTATION

4 X 270 MW BHADRADRI TPS

SPEC NO.: **PE-TS-411-145-I**

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

LCP & JUNCTION BOXES SPECIFICATION


Arvind


S A Khan


Praveen Kishore

1.00.00 GENERAL REQUIREMENT

1.01.00 ENCLOSURES FOR INSTRUMENTS AND OTHER EQUIPMENT

1.01.01 All panels, cabinets, distribution boxes, junction boxes, terminal boxes and all other field mounted equipment / enclosures shall have suitable environmental protection as detailed in Section-I of this volume of the specification.

1.02.00 SURFACE PREPARATION & PAINTING

1.02.01 All sheet metal panel/ desk exterior steel surfaces shall be sand blasted, ground smooth and painted as specified below.

1.02.02 Suitable filler shall be applied to all pits, blemishes and voids in the surface. The filler shall be sanded so that surfaces are level and flat; corners are smooth and even. Exposed raw metal edges shall be ground burr-free. The entire surface shall be blast clean to remove rust and scale and all other residue due to the fabrication operation. Oil, grease and salts etc. shall be removed from the panels by one or more solvent cleaning methods prior to blasting.

1.02.03 Two spray coats of inhibitive epoxy primer surfacer shall be applied to all exterior and interior surfaces, each coat of primer surfacer shall be of dry film thickness of 1.5 mil. A minimum of two spray coats of final finish color (Catalyzed epoxy or polyurethane) shall be applied to all surface of dry film thickness 2.0 Mil. The finish colors for exterior and interior surfaces shall conform to the following shades:

- Exterior – Opaline green shade 275 of IS: 5 or equivalent international code..
- Interior - Brilliant White.

1.02.04 Paint films, which show sags, cheeks, blisters, teardrops, fat edges or other painting imperfections, shall not be acceptable.

1.03.00 WIRING

1.03.01 All spare contacts of relays, switches and push buttons shall be wired up to the terminal blocks. All intercommunications between sections of panels/desks shall be furnished.

1.03.02 Each wire shall be identified at both ends with wire designation as per approved wiring diagram. Heat shrinkable type ferrules with indelible computerized ink print shall be used with cross- identification.

1.03.03 All wire termination shall be made with insulated sleeve and crimping type lugs. Wire shall not be spliced or tapped between terminals. Open-ended terminal lugs will not be accepted. Wires shall not be looped around the terminal screws or studs.

- 1.03.04 Internal wiring should be terminated uniformly on one side of the terminal block leaving the other side available for termination of outgoing cables. Internal wiring shall be grouped so that all outgoing wiring to each particular remote location is terminated on adjacent terminal blocks. Interior wiring and jumperings shall be arranged so that external connections can be made from internal side of terminal blocks. Common connections shall be limited to two (2) wires per terminal.
- 1.03.05 Wiring shall be arranged to ensure free access to all instrument or devices for maintenance. No wire shall be routed across the face or rear of any device in a manner, which will impede the opening of covers or obstruct access to leads, terminals or devices
- 1.03.06 Wires shall be dressed and run in trays or troughs with clamp-on type covers. Wirings may be neatly bunched in groups by non-metallic cleats or bands. Each group shall be adequately supported along its run to prevent sagging or strain on termination.
- 1.03.07 Shield wires shall be terminated on separate terminal blocks. Common connections shall be limited to two wires per terminal. Signal circuit shields shall be grounded at the power supply end only or as recommended by manufacturer.
- 1.03.08 All low level signal cables shall be separately bundled to from control cable and maintained at 300 mm minimum spacing from control bundles.
- 1.03.09 Panel internal wiring shall follow distinct color-coding to segregate different voltage levels viz. 24V DC, 48V, 110V AC, 240V AC, 220V DC etc.
- 1.03.10 Thermocouple lead wires, analyzer measuring lead wires, or any other lead wires carrying measuring signal of the order of low milli volt or micro volt shall be electrically and physically isolated from other AC and DC wiring. Shielded wires used in such cases for panel internal wiring shall be continuous and ungrounded with the shield terminated individually and separately in panel terminal block.
- 1.03.11 Wiring to door mounted devices shall be provided with multi-strand wires of (49 strands minimum) adequate loop lengths of hinge-wire so that multiple door openings will not cause fatigue failure of the conductor.
- 1.03.12 Internal wiring in factory pre-wired electronic systems cabinets may be installed according to the Contractor's standard wire size, insulation, and method of termination on internal equipment. Insulation for all wiring, including circuit board wiring, back panel wiring, power supply wiring and interconnecting cables between devices shall pass the vertical flame test per IPCEAS-1981. Identification of conductors may be done by insulation color-coding identified on drawings or by printed wiring lists.

- 1.04.00 TERMINAL BLOCKS
- 1.04.01 All terminal blocks shall be rail mounted/ post mounted type, cage clamp type with high quality non-flammable insulating material of melamine suitable for working temperature of 105 Deg C. The terminal blocks in field mounted junction boxes, instrument enclosures racks etc. shall be suitable for cage clamp connections. The terminal blocks in Control Equipment Room termination/ marshalling cubicles shall be suitable for post mounted cage clamp connection at the field input end. The exact type of terminal blocks to be provided by Bidder shall be subject to Owner.
- 1.04.02 All terminal blocks shall be provided complete with all required accessories including assembly rail, locking pin and section, end brackets, small partitions, transparent covers, support brackets, distance sleeves, warning level, marking etc. For RTDs ring - tong type lugs shall be used at Junction Boxes.
- 1.04.03 The characteristics of the terminal blocks shall be as follows.
- i) High contact force, independent of conductor cross-section and large contact surface area.
 - ii) Integrated self-loosening protection to avoid shifting of contact surface that may allow contamination of connection point.
 - iii) Inspection and maintenance free (resistant to thermal aging and vibration)
 - iv) Low and constant voltage drop
- 1.04.04 The insulation of the terminal blocks shall be of suitable thermoplastic material.
- 1.04.05 The spacing between Terminal blocks channels in panels and cubicles shall be adequate for routing the cable troughs and to allow adequate free workspace for termination and removal of wires. The terminal blocks shall be arranged with atleast 100 mm clearance between two sets of terminal blocks and junction box walls.
- 1.04.06 Signals of different voltage levels shall be clearly segregated by providing separate rows to each type of signal and by using terminal blocks of different color for each type of signal and by providing barrier strips between them.
- 1.04.07 Terminal blocks shall be provided with white marking strips / self-adhesive marker cards and where permitted by the safety codes and standards, shall be without covers. Power terminals and high voltage (above 48 volts) terminals shall have protection covers. All terminals shall be provided with permanent terminal identification numbers on both sides.
- 1.04.08 At least 20% spare unused terminals shall be provided on each terminal block for circuit modifications and for termination of all conductors in a multi-conductor control cable.

- 1.04.09 The bottom of the terminal block shall be at least 200 mm above the cable gland for bottom entry type panels.
- 1.04.10 For extending 24 V DC supply to panels, the size of the terminals shall be decided based on voltage drop and not based on current.
- 1.04.11 Other requirements of the terminal blocks are as follows:
- i) The last terminal in a rail-mounted assembly shall be closed with an end plate and end bracket.
 - ii) For visual and electrical separation of terminal groups, partition plates shall be provided, which can be push fitted after forming an assembly.
 - iii) Design shall permit testing of incoming and outgoing signals by using suitable test plug and socket without disconnecting the cable connections.
 - iv) It shall be possible to use jumper plugs through the above test plug socket to connect adjacent terminals. Adequate number of short circuit jumper plugs shall be provided for the purpose.
 - v) Where more than one connection to a terminal block is required, two tier terminals shall be used.
- 1.05.00 **GROUNDING**
- 1.05.01 Separate Protective and Electronic system ground as required shall be provided.
- 1.05.02 All panels, desks, cabinets shall be provided with a continuous bare copper ground bus (Frame ground), bolted to the panel structure at bottom on both sides and effectively ground the entire structure. The bolts shall face inside of panels.
- 1.05.03 For electronic system cabinets the electronic system ground bus (Electronic ground) shall be similar but insulated from the cabinet and shall be separately connected to the system ground. The same ground may be used to earth the shield of shielded signal cables, otherwise a separate ground bus shall be provided for connecting the signal cable shields. Cable shields shall be grounded at the panel end only and shall never be left open. The electronic ground between panels of a shipping section shall be firmly looped.
- 2.00.00 **CONTROL DESKS & PANELS**
- 2.01.00 **GENERAL**
- 2.01.01 All control desk, panels etc. shall be furnished fully wired with necessary provision for convenience outlets, internal lighting, utility receptacles, grounding, ventilation, space heating, anti-vibration pads, internal piping &

- accessories as required for completeness of the system.
- 2.01.02 The design shall conform to the EN ISO 11064 (Ergonomical design of Control Room), Part 1, 2 and 3.
- 2.01.03 The exact dimensions, material, construction details, grounding, general arrangement etc. shall be as per actual requirement and shall be finalized during detail engineering and subjected to Owner's approval.
- 2.01.04 Incoming power supply feeders shall be duplicated. Alarm shall be provided for failure of a power supply feed.
- 2.01.05 For Control desk/ panel mounted instruments/ devices etc. which are to be powered from UPS, all required conversion of interface equipments/ accessories to make such devices compatible with UPS supply shall be provided. All necessary hardware like input switches/ fuse unit for each feeder as well as switch fuse unit for each instrument/ device on the power supply line shall be provided. From UPS redundant feeders shall be provided with suitably rated MCB and provision of fast auto changeover of UPS feeders.
- 2.01.06 Crating of the panels and desks shall be suitable for protection against shock, vibration, inappropriate handling and inclement weather conditions during transportation and warehousing. Mounted equipment shall have adequate protection against damage during handling, transit and storage. Suitable desiccant shall be used inside the packing case.
- 2.01.07 Nameplate
- a) Nameplate shall be provided for instrument or device mounted on the panel.
 - b) Nameplates for panels shall be provided both in front and rear.
- 2.02.00 CONTROL DESK
- 2.02.01 Control desk shall be free standing, floor mounting, table top type with doors at back and shall be constructed of 3 mm thick (minimum) CRCA steel or Aluminium extrusion. Aluminium structure shall be anodized or powder coated paint finish. The top surface of control desk shall be 30 mm (minimum) thick with the top 12 mm (minimum) of acrylic solid surface and the remaining 18 mm of laminated medium density fibre (MDF) board.
- 2.02.02 Monitors with retractable keyboard shall be provided on the desk. Desk shall be arranged in arc-like shape without any sharp edges. Edges shall be extruded PVC or rounded post-formed laminate.
- 2.02.03 Desks shall be of modular, scalable and industrially ruggedized design and shall have connections for PA system handsets & telephone sets.
- 2.02.04 Desks shall have concealed cable trays for wire dressing. Both Horizontal & Side Managers (2 separate horizontal cable routing wire baskets for power & data cables) shall be provided.

Each User station will be provided with 2 separate power distribution units (1 for Main line & 1 for UPS line). Each power distribution unit will have 6 points of 5/13 Amp sockets, Mains MCB On/Off Switch & Indicator.

Adequate heat management provision for Exhaust of heat from within the Console Desk Assembly shall be provided. There will be multiple fans provided in the Main Control Desk. Each Fan will be of 230 VAC 250 CFM Ball Bearing based. Ventilation louvers will be provided on both Front & Rear Modesty with special Air Filters. Adequate space for CPU & Other equipments placed with in the desk.

2.02.05 Design shall include Earthing bolts.

2.02.06 Back installed items shall be suitably concealed from front view.

2.02.07 All operator workstations for SG, TG, Auxiliaries & Off-site Plants shall be mounted on this Control Desk. The cabling / wiring between OWS & CPUs, power supply cables etc. shall be aesthetically routed and concealed from view.

2.02.08 HARDWIRED DEVICES ON CONTROL DESK (DRAW OUT SECTION)

Release and Lamp Test push buttons shall be provided for a set of push buttons (decided during detail engineering stage). Depending on the type of control/ function, required number of push buttons/ indicating LEDs & their color, push button stations shall be selected. The size of push button stations shall be 24 x 48 mm or 25 x 50 mm and shall have service inscription details at the front. Emergency push buttons (with cover) shall be mounted on top of Control Desk.

2.03.00 BACK UP PANEL

2.03.01 Construction shall be from CRCA steel of thickness not less than 3mm.

2.03.02 Upright back-up panel shall be provided where hardwired devices shall be mounted on a mosaic grid type console. The mosaic grid tiles shall be of 24 mm x 48 mm (or 25 mm x 50 mm) size, made of heat & flame retardant, self extinguishing and non-hygroscopic material with flat matt finish without glare and non reflecting type.

2.03.03 DDCMIS Back-up Panel (referred as Unit Control Panel-UCP) shall also mount annunciation fascia (minimum 500 nos.) and the flame monitoring cameras along with other hardwired devices as decided during detail engineering stage by Owner. Color coding shall also subject to Owner's approval.

2.03.04 Colored Mimic for different Off-site plant control systems (as enumerated elsewhere in this specification) and hardwired annunciation system shall also

be mounted on the back up panels.

2.04.00 PANELS/CABINETS

2.04.01 All DDCMIS system modules, power supply components and other Local Control panels (PLC/Relay based) shall be housed in cabinets as specified below.

2.04.02 The cabinet mounted equipments shall be fully assembled, installed in mounting racks, wired and fully tested as per specification requirements and Owner approved drawings prior to shipment to the project site.

2.04.03 The Bidder shall ensure that the cabinets are complete & ready for installation before dispatch from manufacturing works. The installation work at project site for these cabinets shall only involve connections through multi-pair cables from marshalling cabinets (wherever provided) to system cabinets and inter-cabinet/cabinet to Control Desk/ Back up Panel.

2.04.04 All electronic cards, network components, power supply modules etc. located shall be suitably housed in cabinets and shall be neatly arranged in sub-racks. Network components shall be visible in door closed condition (e.g. Glass doors etc.) as approved by Owner.

2.04.05 Bidder shall design the cabinet internal arrangement, floor cutout and cable gland plate such that all the cables entering or leaving the cabinet can be properly glanded in the gland plate.

2.04.06 The packaging density of panels shall be such that the temperature rise within the panels shall never exceed 10°C above ambient even under worst operating conditions. Cooling Fans shall be provided wherever required and this shall be of industrial grade.

2.04.07 TECHNICAL PARTICULARS

1. Material of Construction : Cold Rolled Coal Annealed (CRCA) steel sheet
2. Thickness of Sheet : a) 2.0 mm for faces supporting instruments / terminals
: b) 1.6 mm for other sides and top
3. Construction : Welded throughout as per approved National Standards
4. Post welding operation : a) Grounding of all welds to smoothness
: b) Rounding of corners

- : c) Cleaning of weld spatters
- 5. Panel height : 2300 mm (approx)
- 6. Corners : 7 mm inner radius
- 7. Dimensional Tolerances :
 - a) In height & length - 3 mm
 - b) In height between adjacent sections - 2 mm
 - c) Total for a group - 6 mm
- 8. Doors : Double, recessed, turned back edges, full height front & rear
 - i) Thickness of Sheet : 2 mm
 - ii) Hinges : Stainless steel
 - iii) Door latches : Three point type
 - iv) Door gaskets : Neoprene rubber on fixed frame to result dust proof/weatherproof enclosure
 - v) Opening of the doors : Outward
 - vi) Louvers : With removable wire mesh to ensure dust and vermin proof
- 9. Gland plates : Removable in sections
4 mm thick (bottom)
- 10. Cable entry : Bottom
- 11. Hardware :
 - a) Anti vibration pad- 15 mm
 - b) Predrilled base channel ISMC – 100 or equivalent for all sides
 - c) Stainless steel buff- finished 2 mm thick kick plate for all sides
 - d) Stainless steel scratch strips along desk edges fixed with pan-head recessed screws
 - e) Rubber strips to ensure air

tightness between kick plate and finished floor

f) Lifting hook / Eye bolt

g) Drawing pocket

h) Door switch, lamps, thermostat, heaters and industrial grade cooling fans,, illumination fixtures

- | | | |
|---------------------------------|---|--|
| 12. Name Plate | : | Both at front and back surface of the panel |
| 13. Fixing of name plate | : | Stainless steel pan head screws |
| 14. Name plate material | : | Laminated phenolic (3 layers) |
| 15. Lettering | : | Black with white engraved |
| 16. Mounting of terminal blocks | : | Vertical angle support bracket tack welded on sheet steel plate, screwed on internal wall of enclosure |

2.05.00 FURNITURE

All the furnitures in the Central / Local control Room (s), Engineers' rooms, Instrument laboratory , SWAS Room & any other rooms with C&I equipments located in different plant buildings under Bidder's scope shall be included in Bidder's scope of supply. Bidder shall provide following industrial grade furniture items as a minimum from reputed manufacturers/suppliers meeting International Standards. The furniture shall be modular and latest with ease of operational features. The furniture shall be modern, aesthetically designed, modular, flexible, space saving and future safe.

2.05.01 WORK STATION FURNITURE

Modular work station furniture, suitable for mounting servers & historians, programmer stations, PC based systems, printers (A4/A3 color laserjet) etc. shall be provided.

2.05.02 PC RACK

PC Racks shall be provided to mount CPUs of workstations/PCs of OWS/LVS etc. in control room. For each PC / workstation / monitor at least one chair shall be included.

2.05.03 CHAIRS

Industry standard revolving chairs with wheels and with provision for adjustment of height (hydraulically/gas lift) shall be provided for the operators, unit-in-charge & other personnel in control room area. These shall be designed for sitting for long duration such that these are comfortable for the back.

2.05.04 TABLES

Industry standard computer tables shall be provided & shall be as approved by Owner during detailed Engineering. Glass top teak wood horse shoe shaped table with vertical file mounting arrangement (two layers to house approx. 40 Nos of files and lockable drawers at both ends) for Engineering Room shall be provided.

2.05.05 ALMIRAHs

Steel Almirahs shall be provided for keeping documents in the documentation room. Glass doors for each rack shall be provided such that the documents are visible from outside. Size of the rack shall be sufficient to easily fit technical manuals. The exact details shall be approved by Owner during detailed Engineering.

2.05.06 KEYPAD

One keypad per unit shall be provided for the storing of keys of relevant areas of the unit in the control room.

2.05.07 LOCKERS

Suitable lockers shall be provided in the room adjacent to the control room for storing of personal articles of control room personnel. Also, lockers of bigger size shall be provided in documentation Room for storing of personal documents. Details shall be finalized and approved by Employer during detailed engineering.

3.00.00 LVS PANEL

3.01.00 An arc shaped Large Video Screen (LVS) panel shall be supplied for mounting large video screens in number of tiers in various Control rooms as specified elsewhere in this specification.

Bidder shall provide and fix ACP cladding around the LVS screen including covering the LVS back side and LVS stand. The cladding will be from floor finish to 600 mm above LVS screen like a self-standing partition with necessary openings for system requirement. ACP paneling shall be with 304 grade & approx. 0.5 mm mirror finish SS strip.

3.02.00 The profile, dimensions and the general arrangement shall be finalized & approved by Owner during detailed engineering. Recommendations, if any, for the control room lighting in order to ensure continuous proper viewing of the LVS screen by the operator & shift incharge (without any fatigue) shall be

- clearly brought out by the Contractor in his offer, alongwith all relevant details/basis.
- 3.03.00 Any other requirement for proper LVS mounting & functioning & viewing shall also be specifically brought out by the Contractor in his offer, along with all relevant details.
- 4.00.00 **LOCAL INSTRUMENT RACK (LIR) & LOCAL INSTRUMENT ENCLOSURE (LIE)**
- 4.01.00 GENERAL
- 4.01.01 Devices (Transmitters/ Switches) located in the field shall be suitably grouped together to the extent possible and installed in the LIE (Closed Rack) and LIR (Open Rack) in Boiler/TG Building and Off-site plant areas.
- 4.01.02 Racks and enclosure shall be factory prefabricated & painted and shall complete with internal piping, tubing, manifold, isolation valves, blowdown valves, integral junction box, illumination etc.
- 4.01.03 No more than six instruments shall be grouped in a single rack / enclosure.
- 4.01.04 Racks shall be installed above the tapping points for air, flue gas and coal air mixture application whereas for applications such as for water and steam, racks to be installed below the source point.
- 4.01.05 Attention shall be paid in the layout to avoid air traps in liquid piping and water accumulation in air /gas piping.
- 4.01.06 Racks used for furnace, flue gas and air application shall be provided with intermittent & continuous air purging
- 4.01.07 Welding of impulse lines shall comply with the provisions of the latest applicable ANSI Code for Pressure Piping.
- 4.01.08 Earth stud shall be furnished at rack for safety grounding.
- 4.02.00 LOCAL INSTRUMENT ENCLOSURE (LIE)
- 4.02.01 Enclosure shall be free standing type. Racks shall be adequately reinforced to ensure true surfaces and to provide support. Major load - bearing posts shall be suitably supported by gusset plates or moment members.
- 4.02.02 Enclosure outer shall be constructed from at least 3 mm thick steel plate and epoxy painted to shade gray. Base frame shall be made of ISMC 100 and black colour finish.
- 4.02.03 2" NB galvanized pipes shall be laid horizontally and supported at two end channels to mount transmitters at accessible height. Center posts or any

- member, which would reduce access, shall be avoided.
- 4.02.04 Double leaf interlocking front opening doors with three point locking shall be provided and shall be arranged for maximum possible access to the interior. Key shall be of identical for all enclosures.
- 4.02.05 Doors shall have concealed quick removal type pinned stainless steel hinges and locking handles. Gaskets shall be used between all mating sections to achieve dust and weather proof enclosure rated for IP-65 including the internal junction box. All enclosures shall have access doors on front side.
- 4.02.06 Removable type bulkhead plates of thickness not less than 6 mm shall be mounted at the racks with suitable high temperature gasket. Impulse lines within the enclosures shall be properly clamped.
- 4.02.07 All internal wirings between the instruments and junction box shall run through flexible conduits. No exposed wirings within transmitter racks both open and closed type, is admissible.
- 4.02.08 Racks shall have a common blowdown drain header, which will connect individual instrument blowdown line after suitable pressure breaking through regulating globe type blowdown valves. Covered funnels shall be used for saturated liquid and steam service, whereas, open funnels may be used for cold liquid services. Header (2" NB ASTM A 106, Sch-80 Gr. C) shall be suitably sloped and shall have one end flanged and extending beyond the rack for connection to plant drain header..
- 4.02.09 Each rack shall be provided with one receptacle, light fixtures with wire guard and one lighting switch each at instrument & Junction box compartments with wire guard. Lighting switches may be door actuated & mounted inside the panel. Outlet box, switch box and device covers shall be of galvanized stamped steel. Light switches and receptacles shall be installed inside the enclosure on the wall near the latch side of the enclosure door. Light fixtures shall be installed on the ceilings of the enclosures.
- 4.02.10 Power supplies for miscellaneous devices shall be provided with MCB located within the enclosures. MCB shall be mounted in fuse blocks. Nameplates shall be furnished above the MCB blocks, identifying the devices being served.
- 4.02.11 Vibration dampeners shall be installed for supporting each enclosure. The loading at each corner of the enclosure shall be determined by actual test weighting when construction is complete to determine the correct length of each dampener for proper loading of the dampener in accordance with manufacturer's recommendations
- 4.03.00 LOCAL INSTRUMENT RACK (LIR)
- 4.03.01 Rack shall be free standing type constructed from 6 mm thick steel channel frame provided with a canopy to protect the instrument from dripping water or

falling objects and shall be epoxy painted. Canopy shall be of CRCA steel sheet of at least 3 mm thickness.

- 4.03.02 Rack Major load-bearing posts shall be suitably supported by gusset plates or moment members. Suitable fenders grill shall be welded to the end-posts of the rack to outline a boundary beyond which no mounted equipment shall project to protect instrument from accidental contact during personnel movement. Center posts or any member, which would reduce access, shall be avoided.
- 4.03.03 2" NB galvanized pipes laid horizontally and supported at two end channels shall be employed at working accessible height for mounting of instruments.
- 4.03.04 All internal wirings between the instruments and junction box shall run through flexible conduits. No exposed wirings are admissible.
- 4.03.05 Racks shall have a common blowdown drain header, which will connect individual instrument blowdown line after suitable pressure breaking through regulating globe type blowdown valves. Covered funnels shall be used for saturated liquid and steam service, whereas, open funnels may be used for cold liquid services. Header (2" NB ASTM A 106, Sch-80 Gr. C) shall be suitably sloped and shall have one end flanged and extending beyond the rack for connection to plant drain header..

Each rack shall be provided with one receptacle, one light fixture with wire guard and one lighting switch. Outlet box, switch box and device covers shall be galvanized stamped steel. Light fixtures shall be installed on the canopy of the rack

- 4.03.06 Power supplies for miscellaneous devices shall be provided with MCB located within the enclosures. MCB shall be mounted in fuse blocks. Nameplates shall be furnished above the MCB blocks, identifying the devices being served.

4.04.00 JUNCTION BOX

1. Type of Enclosure : Dust tight & weatherproof conforming to IP 65
2. Material : 3 mm sheet steel / fiberglass reinforced polyester(UV stabilized)
3. Type of Cover : Solid unhinged with retention chain / Screwed at all four corners
4. Paint :
 - i) Exterior : Opaline green shade 275 of IS: 5
 - ii) Interior - Brilliant Glossy White.

- Surface / Two (2) inch Pipe stanchion
5. Mounting : (At a dry compartment at one side of the enclosure / rack with front opening type door)
6. Cable Entry : 3 mm (min) Bottom / side Gland plate
7. Gasket : Neoprene
8. Grounding : Brass earth lug with green screw head
External-2 nos , Internal-1no. (M6)
9. Number of Drain Holes : Two at bottom capped
10. Identification : Label for JB and Tags for cable
11. Accessories : Rail mounted cage clamp type screwless terminals (suitable for conductor size up to 2.5sq.mm of suitable voltage grade) with markers and 20% spare terminals
- b) Cable gland (Brass) & raceways
- c) Ferrules & lugs (Brass)
- d) Aluminum back panel
- e) Canopy at top
- f) Mounting brackets
- g) bolts and nuts made of brass etc.



DATA SHEET FOR LOCAL PANELS

SPECIFICATION NO.: PE-SS-999-145-054A

VOLUME

SECTION

REV. NO. 02

DATE: 16.09.2013

SHEET 1 OF 3

TAG No. Qty.....

Data Sheet No.: PES-145A-DS1-0

Data Sheet A & B

DATA SHEET-A FOR LOCAL PANEL
(TO BE FILLED BY PURCHASER)

DATA SHEET-B
(TO BE FILLED-UP BY
BIDDER)

GENERAL	MANUFACTURER		
	CONSTRUCTION		☒ FOLDED ☐ WELDED
	ENCLOSURE SHEET THICKNESS (As per Section 8.13, Volume V of contract specification)	FRONT	☐ 2.0 mm
		OTHER	☐ 2.0 mm
		DOOR	☐ 1.6 mm
HEIGHT		☐ 2365 mm for stand alone panels. ☐ Other	
	OTHER	☐ Load bearing sheet front shall have 3mm thickness	
TECHNICAL	INPUT POWER SUPPLY * (As per Electrical specification) (ANY OTHER POWER REQUIREMENT TO BE DERIVED FROM THIS SUPPLY ONLY)		☐ 240V 50 Hz AC ☐ 220V DC ☒ 415V 3 PHASE 3W ☐ 400V 3 PHASE 4W
	NO. OF FEEDERS (As per Electrical specification)		☐ ONE ☐ TWO
	STARTER WITH MCC		☐ REQUIRED ☒ NOT REQUIRED
	IPR POSITION		☒ MCC ☐ RELAY PANEL
	CONTACT RATING OF RELAY		☒ 5 Amp, 230 V AC ☒ 0.25 Amp, 220V DC
	CONTROL SUPPLY		☐ 110V AC ☐ 220V AC ☐ 220V DC ☐ Other. (As per requirement)
	ALARM ANNUNCIATOR WINDOW (EXCLUDING SPARES)		____ NOS. (AS REQUIRED)
	TEMP SCANNER (IF REQUIRED -NO. OF CHANNELS TO BE SPECIFIED UNDER SEC-C)		☐ REQUIRED ☒ NOT REQUIRED
	PAINT TYPE (As per Annex-1, Section 7.6, Volume IV of contract specification)		☐ EPOXY ENAMEL ☐ EPOXY POWDER COATED
	MIMIC (TYPE OF MIMIC- MATERIAL, THICKNESS TO BE SPECIFIED DURING DETAILED ENGG.)		☒ REQUIRED ☐ NOT REQUIRED
	PANEL COLOUR (EXTERNAL) (As per Annex-1, Section 7.6, Volume IV of contract specification)		☐ LIGHT GREY ☐ OPALINE GREEN
	FINISH (EXTERNAL) (As per Annex-1, Section 7.6, Volume IV of contract specification)		☐ MATT ☐ GLOSSY ☐ SEMI GLOSSY
	PANEL COLOUR (INTERNAL) (As per Annex-1, Section 7.6, Volume IV of contract specification)		☐ WHITE ☐ CREAM ☐ OFF WHITE
	FINISH (INTERNAL) (As per Annex-1, Section 7.6, Volume IV of contract specification)		☐ MATT ☐ GLOSSY ☐ SEMI GLOSSY
	CLASS OF PROTECTION		☒ IP-55 (FOR INDOOR SERVICE) ☒ IP-67 (FOR OUTDOOR SERVICE) ☐ ANY OTHER
	CONTROL HARDWARE		☒ RELAY BASED
	FOUNDATION ARRANGEMENT		☐ FOUNDATION BOLTS ☐ ANCHOR FASTENERS
WEIGHT OF PANEL (Kg.)			

Arvind


S A Khan

(Vendor to certify)
Praveen Kishore

	DATA SHEET FOR LOCAL PANELS		SPECIFICATION NO.: PE-SS-999-145-054A	
			VOLUME	
			SECTION	
			REV. NO. 02	DATE: 16.09.2013
TAG No. Qty.....		Data Sheet No.: PES-145A-DS1-0		
Data Sheet A & B				
DATA SHEET-A FOR LOCAL PANEL (TO BE FILLED BY PURCHASER)			DATA SHEET-B (TO BE FILLED-UP BY BIDDER)	
	PANEL TYPE	☐ PRESSURISED ☐ UNPRESSURISED As per Requirement		
	CABLE GLAND	☒ DOUBLE COMPRESSION		
	AMMETER (TYPE OF INPUT) *	☐ 1 Amp CT ☐ 4-20 mA		
	SCOPE OF SUPERVISION FOR ERECTION & COMMISSIONING	☐ APPLICABLE ☒ NA		
	* TO BE CO-ORDINATED WITH PEM ELECTRICAL			
NAME	PREPARED BY AANCHAL CHOUDHARY	CHECKED BY SACHIN SRIVASTAVA	APPROVED BY MA MANSOORI	COMPANY SEAL NAME: SIGNATURE: DATE:
DESIGNATION	SR.ENGR	DY.MNGR	D. GM	
SIGNATURE				
DATE	16.09.2013	16.09.2013	16.09.2013	


 Arvind


 S A Khan


 Praveen Kishore



DATA SHEET FOR LOCAL PANELS

SPECIFICATION NO.: PE-SS-999-145-054A	
VOLUME	
SECTION	
REV. NO. 02	DATE: 16.09.2013
SHEET 3	OF 3

TAG No. Qty.....

Data Sheet No.: PES-145A-DS1-0

Data Sheet C

DATA SHEET-C FOR LOCAL PANEL
(TO BE FILLED BY CONTRACTOR AFTER AWARD OF CONTRACT)

GENERAL	MANUFACTURER		
	CONSTRUCTION		☐ FOLDED ☐ WELDED (As per requirement EDN)
	ENCLOSURE SHEET THICKNESS	FRONT	
		OTHER	
		DOOR	
		HEIGHT	
	OTHER		
TECHNICAL	INPUT POWER SUPPLY		
	NO. OF FEEDERS		
	CONTACT RATING OF RELAY		
	TEMP SCANNER		
	CONTROL SUPPLY		
	ALARM ANNUNCIATOR WINDOW (EXCLUDING SPARES)		
	PAINT TYPE		
	PANEL COLOUR (EXTERNAL)		
	FINISH (EXTERNAL)		
	TYPE OF MIMIC MATERIAL OF MIMIC THICKNESS OF MIMIC		
	PANEL COLOUR (INTERNAL)		
	FINISH (INTERNAL)		
	CLASS OF PROTECTION		
	CONTROL HARDWARE		
	FOUNDATION ARRANGEMENT		
WEIGHT OF PANEL (Kg.)			

Arvind

S A Khan

Praveen Kishore

	DATA SHEET FOR LOCAL PANELS			SPECIFICATION NO.: PE-SS-999-145-054A	
				VOLUME	
				SECTION	
				REV. NO. 02	DATE: 16.09.2013
			SHEET 3 OF 3		
TAG No. Qty.....			Data Sheet No.: PES-145A-DS1-0		
Data Sheet C					
DATA SHEET-C FOR LOCAL PANEL (TO BE FILLED BY CONTRACTOR AFTER AWARD OF CONTRACT)					
	PANEL TYPE				
	CABLE GLAND				
	AMMETER (TYPE OF INPUT)				
	SCOPE OF SUPERVISION				
NAME SIGNATURE DATE	PREPARED BY	CHECKED BY	APPROVED BY		COMPANY SEAL NAME: SIGNATURE: DATE:
	AANCHAL CHOUDHARY	SACHIN SRIVASTYAVA	MA MANSOORI		
	16.09.2013	16.09.2013	16.09.2013		

Arvind

S A Khan

Praveen Kishore



Technical specification for
CONTROL & INSTRUMENTATION

4 X 270 MW BHADRADRI TPS

SPEC NO.: **PE-TS-411-145-I**

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

LCP Quality Plan


Arvind


S A Khan


Praveen Kishore

 STD QUALITY PLAN NO.: PE-QP-999-145-1056		STANDARD QUALITY PLAN FOR LOCAL CONTROL PANEL											
		VOLUME IIB											
		SECTION D											
		REV. NO. 01 DATE: 22-02-2008											
		SHEET 1 OF 7											
Sl. No.	Component / operation	Characteristics Checked	* Cate gory	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records	Agency \$			Remarks	
									P	W	V		
1.0	INCOMING Sheet Steel (CRCA & HR)	1. Chemical Composition	MA	Chemical analysis	Sample	Relevant standard	Relevant standard	Test Certificate	3	---	2		
		2. Bend Test	CR	Mech. test	Sample	Relevant standard	Relevant standard	Log Book	2	---	---		
		3. Surface finish	MA	Visual	100%	100%	Factory Standard / Sample	Factory Standard / Sample	Log Book	2	---	---	
		4. Waviness	MA	Visual	100%	100%	Factory Standard	No Waviness	Log Book	2	---	---	
		5. Thickness	MA	Measurement	100%	100%	BHEL Spec.	BHEL Spec.	Log Book	2	---	---	
		6. Mill marking	MA	Visual	100%	100%	Factory Standard	Factory Standard	Log Book	2	---	1	
2.0	Flats / Angles / Channels	1. Dimensions	MA	Measurement	Sample	Relevant standard	Relevant standard	Log Book	2	---	---		
		2. Surface Defects	MA	Visual	100%	100%	Factory Standard / Sample	Factory Standard / Sample	Log Book	2	---	---	
		3. Straightness	MA	Measurement	100%	100%	Factory Std.	Factory Std.	Log Book	2	---	---	
		4. Mill marking	MA	Visual	100%	100%	Relevant standard	Relevant standard	Log Book	2	---	1	
3.0	Cables / Wires	1. Visual / Surface defects	MA	Visual	100%	BHEL Spec. and Relevant standard	BHEL Spec. and Relevant standard	Log Book	2	---	---		
		2. IR and HV	MA	Electrical	100%		BHEL Spec. and Relevant standard	BHEL Spec. and Relevant standard	Log Book	2	---	---	

LEGEND:

* CR - Critical characteristics

MA - Major characteristics

MI - Minor characteristics

\$

P - Agency Performing the Test.

W - Agency Witnessing the Test.

V - Agency Verifying the Test.

1 - BHEL

2 - Vendor

3 - Sub-vendor

Arvind

S A Khan

Praveen Kishore

 PEM :: C&I		STANDARD QUALITY PLAN FOR LOCAL CONTROL PANEL										STD QUALITY PLAN NO.: PE-QP-999-145-1056				
												VOLUME IIB				
												SECTION D				
												REV. NO. 01 DATE: 22-02-2008				
												SHEET 2 OF 7				
Sl. No.	Component / operation	Characteristics Checked	* Category	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records	Agency \$			Remarks				
									P	W	V					
4.0	Electrical Components like Annunciator Transformers Lamps Switches PBs Contactors Relays Timers Space Heaters Thermostat Indicating meters etc.	3. Conductor a) Resistance b) Size c) Sheet colour	MA MA MA	Electrical Measurement Visual	100% 100% 100%	BHEL Spec. and Relevant standard	BHEL Spec. and Relevant standard	Log Book	2	---	---					
		4. Type / Routine Test Certificates	MA	Verification	100%	BHEL Spec. and Relevant standard	BHEL Spec. and Relevant standard	Log Book	3	---	2					
		1. Verification at make and Type	CR	Visual	Sample	BHEL Spec. and BOM	BHEL Spec. and BOM	Log Book	2	---	---	+ for relay & contactors only				
		2. Verification of Test Certificates	CR	Scrutiny of Type / Routine T.Cs.	100%	Relevant standard	Relevant standard	Log Book	2	---	---	@ for all components except relays & contactors.				
		3. Operation / Functional check	CR	Electrical	Sample+ 100%@	Relevant standard & Catalogue	Relevant standard & Catalogue	Log Book	2	---	---					
		4. I.R.	MA	Electrical	100%	Relevant standard & Catalogue	Relevant standard & Catalogue	Log Book	2	---	---					
		5. H.V.	MA	Electrical	100%	Relevant standard & Catalogue	Relevant standard & Catalogue	Log Book	2	---	---					
		6. Calibration	MA	Electrical	100%	Relevant standard & Catalogue	Relevant standard & Catalogue	Log Book	2	---	1					
		7. Pick up / Drop off Voltage	MA	Electrical	100%	Relevant standard & Catalogue	Relevant standard & Catalogue	Log Book	2	---	---					
LEGEND: * CR - Critical characteristics MA - Major characteristics MI - Minor characteristics																
\$ P W V - Agency Performing the Test. - Agency Witnessing the Test. - Agency Verifying the Test.																
1 - BHEL 2 - Vendor 3 - Sub-vendor																

Arvind

S A Khan

Praveen Kishore

STANDARD QUALITY PLAN FOR LOCAL CONTROL PANEL										STD QUALITY PLAN NO.: PE-QP-999-145-1056				
										VOLUME IIB				
										SECTION D				
										REV. NO. 01		DATE: 22-02-2008		
										SHEET 3		OF 7		
Sl. No.	Component / operation	Characteristics Checked	* Category	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records	Agency \$			Remarks		
5.0	Misc. Components like Gaskets, Terminal Blocks etc.	1. Verification of Type / Make	MA	Visual	Sample	BHEL Spec. & Mfrs. Catalogue	BHEL Spec. & Mfrs. Catalogue	Log Book	2	---	---			
		2. Surface defects	MA	Visual	Sample	BHEL Spec. & Mfrs. Catalogue	BHEL Spec. & Mfrs. Catalogue	Log Book	2	---	---			
		3. IR / HV on Terminal Blocks	MA	Electrical	Sample	BHEL Spec. & Mfrs. Catalogue	BHEL Spec. & Mfrs. Catalogue	Log Book	2	---	---			
6.0	IN PROCESS Blanking / Bending / Forming	1. Dimensions	MI	Measurement	100%	Approved Mfr. drgs.	Approved Mfr. drgs.	Log Book	2	---	---			
		2. Surface defects after bending	MA	Visual	100%	Factory Standard	Factory Standard	Log Book	2	---	---			
7.0	Nibbling / Punching	1. Cutout Sizes	MI	Measurement	100%	Approved Mfr. drgs.	Approved Mfr. drgs.	Log Book	2	---	---			
		2. Deburring	MA	Visual	100%	Approved Mfr. drgs.	Approved Mfr. drgs.	Log Book	2	---	---			
8.0	ASSEMBLY Frame Assembly & Sheet fixing	1. Dimensions	MA	Measurement	100%	Approved drg. / Mfr. Standards	Approved drg. / Mfr. Standards	Log Book	2	---	2			
		2. Alignment	MA	Measurement	100%	Approved drg. / Mfr. Standards	Approved drg. / Mfr. Standards	Log Book	2	---	2			
		3. Welding Quality	MA	Visual	100%	Approved drg. / Mfr. Standards	Approved drg. / Mfr. Standards	Log Book	2	---	2			
		4. Surface defects	MA	Visual	100%	Approved drg. / Mfr. Standards	Approved drg. / Mfr. Standards	Log Book	2	---	2			
LEGEND: * CR - Critical characteristics MA - Major characteristics MI - Minor characteristics										\$			P - Agency Performing the Test. W - Agency Witnessing the Test. V - Agency Verifying the Test.	1 - BHEL 2 - Vendor 3 - Sub-vendor

Arvind

S A Khan

Praveen Kishore

STANDARD QUALITY PLAN FOR LOCAL CONTROL PANEL												STD QUALITY PLAN NO.: PE-QP-999-145-1056		
												VOLUME IIB		
												SECTION D		
												REV. NO. 01 DATE: 22-02-2008		
												SHEET 4 OF 7		
Sl. No.	Component / operation	Characteristics Checked	* Category	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records	Agency \$			Remarks		
									P	W	V			
9.0	Pre-treatment and Painting	1. Pretreatment Process 2. Process parameters like bath temp. concentration etc. 3. Dipping / Removal Time 4. Surface quality after every dip 5. Primer after phosphating 6. Putty Application & Rubbing after primer 7. Paint first coat 8. Putty Application and Rubbing after first coat of paint 9. Paint second coat	MA MA MA MA MA MA	Visual Measurement Measurement Visual Visual, Thickness Visual Visual, Thickness Visual Visual, Thickness, Scratch test Colour adhesion	100% Periodic 100% 100% 100% 100% 100%	Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard	Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard Factory Standard & Relevant standard	Log Book Log Book Log Book Log Book Log Book Log Book Log Book Log Book	2 2 2 2 2 2 2 2	--- --- --- --- --- --- --- ---	1 1 1 1 1 1 1 1			

LEGEND:

* CR

- Critical characteristics

MA

- Major characteristics

MI

- Minor characteristics

\$

P

- Agency Performing the Test.

W

- Agency Witnessing the Test.

V

- Agency Verifying the Test.

1

- BHEL

2

- Vendor

3

- Sub-vendor

LEGEND: * CR - Critical characteristics
 MA - Major characteristics
 MI - Minor characteristics

\$ P - Agency Performing the Test.
 W - Agency Witnessing the Test.
 V - Agency Verifying the Test.

1 - BHEL
 2 - Vendor
 3 - Sub-vendor

Arvind

S A Khan

Praveen Kishore

 PEM :: C&I		STANDARD QUALITY PLAN FOR LOCAL CONTROL PANEL										STD QUALITY PLAN NO.: PE-QP-999-145-1056			
												VOLUME IIB			
												SECTION D			
												REV. NO. 01 DATE: 22-02-2008			
												SHEET 5 OF 7			
Sl. No.	Component / operation	Characteristics Checked	* Cate gory	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records	Agency \$			Remarks			
									P	W	V				
10.	Panel Wiring	1. Wiring Layout 2. Wiring Termination (Crimped Lugs) 3. Ferrule numbers 4. Colour of wiring 5. Size of Conductor	MA MA MA MA MA	Visual Visual Visual Visual Measurement	100% 100% 100% 100% 100%	Approved drgs. & Specs. Approved drgs. & Specs. Approved drgs. & Specs. Approved drgs. & Specs. Approved drgs. & Specs.	Approved drgs. & Specs. Approved drgs. & Specs. Approved drgs. & Specs. Approved drgs. & Specs. Approved drgs. & Specs.	Log Book Log Book Log Book Log Book Log Book	2 2 2 2 2	--- --- --- --- ---	--- --- --- 1 1				
11.	Component Mounting	1. Correct components 2. Fixing	MA MA	Visual Visual	100% 100%	Approved drgs., Specs. & BOM Approved drgs., Specs. & BOM	Approved drgs., Specs. & BOM Approved drgs., Specs. & BOM	Log Book Log Book	2 2	--- ---	--- ---				
12.	FINAL Final Inspection	1. Workmanship 2. Component layout (neatness, accessibility & safety) Mounting / Proper fixing of all components 3. Components identification Marking / Name plates	MA MA MA	Visual Visual Visual	100% 100% 100%	Factory Standard BHEL approved drg. / Spec. BHEL approved drg. / Spec.	Factory Standard BHEL approved drg. / Spec. BHEL approved drg. / Spec.	Inspection Report Inspection Report Inspection Report	2 2 2	1 1 1	1 1 1	At Random by BHEL, based on 100 % internal test reports by Mfr.			
LEGEND: *		CR - Critical characteristics MA - Major characteristics MI - Minor characteristics	P - Agency Performing the Test. W - Agency Witnessing the Test. V - Agency Verifying the Test.	\$									1 - BHEL 2 - Vendor 3 - Sub-vendor		

LEGEND: * CR - Critical characteristics
 MA - Major characteristics
 MI - Minor characteristics

\$ P - Agency Performing the Test.
 W - Agency Witnessing the Test.
 V - Agency Verifying the Test.

1 - BHEL
 2 - Vendor
 3 - Sub-vendor

भारतीय रेल BHEL PEM :: C&I STANDARD QUALITY PLAN FOR LOCAL CONTROL PANEL		STD QUALITY PLAN NO.: PE-QP-999-145-1056										
		VOLUME IIB										
		SECTION D										
		REV. NO. 01 DATE: 22-02-2008										
		SHEET 6 OF 7										
Sl. No.	Component / operation	Characteristics Checked	* Category	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records	Agency \$			Remarks
									P	W	V	
		5. Dimensions	MA	Measurement	100%	BHEL approved drg. / Spec., BOM	BHEL approved drg. / Spec., BOM	Inspection Report	2	1	1	At Random by BHEL, based on 100 % internal test reports by Mfr.
		6. Door functioning	MA	Functional	100%	BHEL approved drg. / Spec.	BHEL approved drg. / Spec.	Inspection Report	2	1	1	
		7. Paint Shade	CR	Visual	100%	BHEL approved drg. / Spec.	BHEL approved drg. / Spec.	Inspection Report	2	1	1	
		8. Paint Thickness	CR	Measurement	100%	BHEL approved drg. / Spec.	BHEL approved drg. / Spec.	Inspection Report	2	1	1	
		9. Workmanship of Gaskets	MA	Visual	100%	Factory Standard	Factory Standard	Inspection Report	2	1	1	
		10. Wiring Layout	MA	Visual	100%	BHEL approved drg.	BHEL approved drg.	Inspection Report	2	1	1	
		11. Wire Termination	MA	Pulling manually	Sample	----	Firm termination	Inspection Report	2	1	1	
		12. Continuity	MA	Electrical	100%	----	Continuity OK	Inspection Report	2	1	1	

LEGEND: * CR - Critical characteristics		\$		P - Agency Performing the Test.		1 - BHEL	
MA - Major characteristics		W		V - Agency Witnessing the Test.		2 - Vendor	
MI - Minor characteristics		V		- Agency Verifying the Test.		3 - Sub-vendor	

Arvind

S A Khan

Praveen Kishore

 PEM :: C&I		STANDARD QUALITY PLAN FOR LOCAL CONTROL PANEL								STD QUALITY PLAN NO.: PE-QP-999-145-1056				
										VOLUME			IIB	
										SECTION			D	
										REV. NO.			DATE: 22-02-2008	
										SHEET			7	
Sl. No.	Component / operation	Characteristics Checked	* Cate gory	Type/Method of Check	Extent of Check	Reference documents	Acceptance Norms	Format of Records	Agency \$			Remarks		
13.	TYPE TEST	Degree of Protection	CR	Mech. Protection	Sample	BHEL approved spec., drg relevant IEC-60947, IEC-60079	BHEL approved spec., drg relevant IEC-60947, IEC-60079	Type Test Certificate	3	---	1			
14	ROUTINE TEST	IR before & after HV Test	CR	Electrical	100%	BHEL approved spec., drg., BOM & relevant standard	BHEL approved spec., drg., BOM & relevant standard	Test Report	2	1	1			
15	FUNCTIONAL TEST	1. Control Logic Operation	CR	Electrical	100%	BHEL approved spec. / drg.	BHEL approved spec. / drg.	Inspection Report	2	1	1			
		2. Instrument Calibration	CR	Electrical	10%	BHEL approved spec. / drg.	BHEL approved spec. / drg.	Inspection Report	2	1	1			
		3. Temperature rise	CR	Electrical	100%	BHEL approved spec/drg. & relevant standard	BHEL approved spec/drg & relevant standard	Inspection Report	2	1	1			

LEGEND: * CR - Critical characteristics		\$		P - Agency Performing the Test.		1 - BHEL	
MA - Major characteristics		W		V - Agency Witnessing the Test.		2 - Vendor	
MI - Minor characteristics		V		- Agency Verifying the Test.		3 - Sub-vendor	

Arvind

S A Khan

Praveen Kishore



Technical specification for
CONTROL & INSTRUMENTATION
4 X 270 MW BHADRADRI TPS

SPEC NO.: **PE-TS-411-145-I**

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

PC SPECIFICATION


Arvind


S A Khan


Praveen Kishore

	Technical specification for Computer For 4X270 MW BHADRADRI TPS	SPEC NO.: PE-TS-411-145-I	
		VOLUME	
		SECTION	
		REV. NO.	00
		DATE : 19.03.2015	
SHEET		OF	

SPECIFICATION FOR PC

a. CPU

1. Processor : Intel core i5 or better, 32 bit
2. RAM : 4 GB min. and expandable to 16 GB
3. Hard Drive : 500 GB or more
4. Removable bulk storage : DVD (R/RW)
5. Graphic accelerator : 8MB (minm.)
6. Graphic Memory : dedicated 1GB or better
7. Operating System : Windows 7 or better
8. Audio controller : 16 bit
9. Communication Port : 2 serial, one parallel, 8 USB, Dual 100Mbps Ethernet
10. Expansion Slot : 3
11. Cache : 512 KB Level 2
12. Video Card : PCI

b. MONITOR


1. Type : LCD COLOUR MONITOR
2. Screen Diagonal : 24" (approx.) flat
3. Display : XGA or better
4. Resolution : 1024 by 768 or better
5. Degree of Protection : IP-30
6. External Controls : Brightness, contrast, Horizontal/Vertical, amplification & Shift
7. Version : To suit Industrial application



Arvind



S A Khan



Praveen Kishore

	Technical specification for Computer For 4X270 MW BHADRADRI TPS	SPEC NO.: PE-TS-411-145-I	
		VOLUME	
		SECTION	
		REV. NO. 00	DATE : 19.03.2015
		SHEET	OF

c. KEY BOARD & MOUSE


1. Type : Flat spill proof membrane or positive depression type ASCII
2. Life Expectancy : 50 million cycles per key
3. Version : To suit Industrial application
4. Mouse : Optical mouse

d. SOFTWARE

Diagnostic Software, Anti Virus, Microsoft office, Acrobat Adobe Software and other application software.


Arvind


S A Khan


Praveen Kishore



Technical specification for
CONTROL & INSTRUMENTATION

4 X 270 MW BHADRADRI TPS

SPEC NO.: **PE-TS-411-145-I**

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

FURNITURE SPECIFICATION


Arvind


S A Khan


Praveen Kishore


	Technical specification for FURNITURE For 4X270 MW BHADRADRI TPS	SPEC NO.: PE-TS-411-145-I	
		VOLUME	
		SECTION	
		REV. NO.	00
		DATE : 19.03.2015	
SHEET		OF	

SPECIFICATION FOR FURNITURE

- a) 4 Nos. cushioned revolving, independently adjustable seat and back chairs.
- b) Glass top Teak wood / MDF table for mounting Operator Station monitors.
- c) Printer tables.
- d) Glass top Teak wood / MDT table for System Engineering Room / Engineering stations with drawer at end.
- e) Glass top teak wood / MDF table with vertical file mounting arrangement (two layer to house approx. 40 Nos of files and lockable drawers at both end) for System Engineering Room / Engineers.


Arvind


S A Khan


Praveen Kishore



Technical specification for
CONTROL & INSTRUMENTATION

4 X 270 MW BHADRADRI TPS

SPEC NO.: **PE-TS-411-145-I**

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

CABLE BOQ


Arvind



S A Khan


Praveen Kishore

CABLE SIZES FOR 4 X 270 MW BHADRADRI TPS PROJECT JOB NO. 411 (PER UNIT)	
Sl no.	Cable Type
	G-TYPE
1	2P X 0.5 sqmm
2	4P X 0.5 sqmm
3	8P X 0.5 sqmm
4	12P X 0.5 sqmm
	F-TYPE
1	4P X 0.5 sqmm
2	8P X 0.5 sqmm
3	12P X 0.5 sqmm
4	24P X 0.5 sqmm
	CONTROL CABLE
1	3C X 2.5 sqmm
2	5C X 2.5 sqmm
3	12C X 1.5 sqmm


Arvind


S A Khan


Praveen Kishore



Technical specification for
CONTROL & INSTRUMENTATION
4 X 270 MW BHADRADRI TPS

SPEC NO.: **PE-TS-411-145-I**

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

KKS PHILOSOPHY


Arvind


S A Khan


Praveen Kishore



DOCUMENT TITLE

KKS NUMBERING PHILOSOPHY

4X 270 MW BHADRADRI TPS

KKS NUMBERING PHILOSOPHY

For identifying (tagging) an instrument / equipment in Power plant KKS numbering scheme is used. The purpose is to assign a unique number to every equipment in the power plant. For C&I equipment unique number are to be provided up to the signal level so that a unique number Input / Output exist in DCS for every signal.

Normally KKS number is a 10 digit alpha-numeric code and is typically split into the following:

X	X	X	A A Y			Y B B B			
---	---	---	-------	--	--	---------	--	--	--

First three digits indicate the Sub-System. The Code for the major system are given as per **Annexure-1**.

Fourth and Fifth digits are the **Numerical Keys at System Code Level** and used to distinguish between main systems having same Alpha Codes.

Sixth and Seventh digits are the **Equipment / Apparatus / Measuring Circuit Code**. The code of various Equipment / Apparatus / Measuring Circuit is shown in **Annexure-2**

Eight, Nine and tenth digits are the **Numerical Keys at Equipment / Apparatus / Measuring Circuit Code** and used to distinguish between various instruments in the same sub-group. Numerical keys at System / Equipment / Apparatus / Measuring Circuit is shown in **Annexure-3**.

Arvind

S A Khan

Praveen Kishore

	DOCUMENT TITLE KKS NUMBERING PHILOSOPHY 4X 270 MW BHADRADRI TPS
---	---

ANNEXURE-1

List of System / Sub-System Codes used in Power Plant:

- 1) Compressed air system : QEA, QEC
- 2) Ventilation System : SAA TO SAZ
- 3) Fire Detection & Protection System + Fire Water pumps : SGM, SGN, SGO, SGP
- 4) Sewage Treatment : SJA TO SJZ
- 5) Pre-treatment Plant : GBI, GBM, GBV
- 6) RO DM Plant : GCI, GCM, GBV
- 7) AC SYSTEM : QKA,QKB,...QKZ

ANNEXURE-2

Standard Equipment Codes:

AA	Valves including drives, also hand operated
AB	Seclusions, Lock, Gates, Doors
AC	Heat Exchanger
AE	Turning, Driving, Lifting equipment
AF	Continuous conveyors, Feeders
AG	Generator Units
AH	Heating and Cooling Units
AK	Pressing and Packaging equipment
AM	Mixer, Stirrer
AN	Blower, Air Pumps / Fans, Compressor Units
AP	Pump Units
AT	Purification, Drying, Filter
AV	Combustion Equipment e.g. grates

Standard Apparatus Codes:

BB	Vessels and Tank
BF	Foundation
BG	Boiler Heating Surfaces
BN	Injector, Ejector
BP	Flow and throughput limitation equipment (Orifice)
BQ	Holders, Carrying Equipment, Support
BR	Piping, Ducts, Chutes, Compensator
BS	Sound Absorber
BU	Insulations, Sheatings



DOCUMENT TITLE

KKS NUMBERING PHILOSOPHY

4X 270 MW BHADRADRI TPS

Standard Measuring Circuits Codes:

CD	Density
CE	Electrical Quantities
CF	Flow, throughput
CG	Distance, Length, Position
CK	Time
CL	Level
CM	Humidity
CQ	Analysis (SWAS)
CS	Speed, Velocity, Frequency
CT	Temperature
CY	Vibration, Expansion

ANNEXURE-3**Numerical Keys****A) Numerical Keys at System Code Level**

- i) Use 10, 20, 30, To distinguish between main systems having same Alpha Codes. Examples:
 - a) Main Steam (Left) and Main Steam (Right)
 - b) BFP – A/B/C
 - c) ID Fan – A/B, FD Fan A/B, AH – A/B
- ii) For branch off from main system path having code say 10, keep the same alpha code and use 11, 12, 13 etc. Similarly for other branch off from main system path having code say 20, keep the same alpha code and use 21, 22, 23 etc and shall carry on further in the same way.
- iii) If the branch off from main system / sub system path is used for some other system, where different alpha codes can be applied, then in that case the said branch line will be designated by the alpha codes of the system to which it is providing the input.

B) Numerical keys at Equipment Code level:

There are three numerical keys available for each type of equipment code. Following has been agreed upon considering present practice, better flexibility and ease in sorting.

- i) Valves and Dampers --- *Equipment Code – AA*

N1N2 N3

Arvind

S A Khan

Praveen Kishore

DOCUMENT TITLE		
	KKS NUMBERING PHILOSOPHY	
4X 270 MW BHADRADRI TPS		
Motorised (<i>on/off duty</i>) - 0 01 to 50 Motorised (<i>inching duty</i>) - 0 51 to 99 Pneumatic (Control) - 1 01 to 50 Motorised (<i>thyrestor Control</i>) - 1 51 to 99 Sol. Operated - 2 01 to 99 (Open / Close duty (Valves, NRVs, Gate) Hydraulic - 3 01 to 99 NRV (Without actuation) - 4 01 to 99 Manual - 5 01 to 99 Manual - 6 01 to 99 Relief & Safety Valves - 7 01 to 99 Reserve - 8 01 to 99 Reserve - 9 01 to 99		
ii) Field Instruments Field Transmitters & Analog Signals - 0 01 to 99 Field Switches & Binary Signals - 1 00 to 99 PG Test Point - 4 00 to 99 Gauges - 5 00 to 99 Automatic Turbine Tester (ATT)-HWR - 2 00 to 99 (Reserved for protection Signals used by Hardwar)		
Example of Numerical Key Usage: In line with the philosophy adopted for Valves / Dampers /instruments etc. pumps and fans in the main systems (having different system code) can be numbered as AP/N100 and as AP/N101, 102, Where system code is same.		



Technical specification for
CONTROL & INSTRUMENTATION
4 X 270 MW BHADRADRI TPS

SPEC NO.: PE-TS-411-145-I

VOLUME

SECTION

REV. NO.

00

DATE : 19.03.2015


SHEET

OF

LIST OF DELIVERABLES


Arvind


S A Khan


Praveen Kishore

LIST OF DELIVERABLES OF PEM - C&I DEPARTMENT FOR MAUX PACKAGES							
4 X 270MW BHADRADRI TPS							
DOCUMENT NUMBER PE-GL-411-145-I100							
Sl.No.	DRAWING NO.	DRAWING/DOCUMENT TITLE	CATEGORY	CUSTOMER	FROM	USER	REMARKS
INSTRUMENTATION							
1	PE-V9-411-XXX-1901	INSTRUMENT DATA SHEETS	A	-	VENDOR	C&I	
2	PE-V9-411-XXX-1902	INSTRUMENT SCHEDULE	I	-	VENDOR	C&I	
3	PE-V9-411-XXX-1903	INSTRUMENT INSTALLATION/ HOOK UP DIAGRAMS	A	-	VENDOR	C&I	
4	PE-V9-411-XXX-1904	FIELD JB TERMINATIONS /GROUPING DOCUMENT	I	-	VENDOR	C&I	
5	PE-V9-411-XXX-1905	QUALITY PLANS (CV,FE, Tx and Analyser)	A	-	VENDOR	C&I	
PLC PANEL							
1	PE-V9-411-XXX-1906	PLC CONFIGURATION DRAWING	A	A	VENDOR	C&I	
2	PE-V9-411-XXX-1907	PLC PANEL GA (INTERNAL & EXTERNAL) DRAWING	A	-	VENDOR	C&I	
3	PE-V9-411-XXX-1908	CONTROL SCHEMES (BLOCK LOGIC)	A	-	VENDOR	C&I	
4	PE-V9-411-XXX-1909	PLC INPUT / OUTPUT SIGNAL LIST	I	-	VENDOR	C&I	
5	PE-V9-411-XXX-1910	UPS BATTERY CHARGER/ BATTERY DATASHEET & SLD	I	\$\$	VENDOR	C&I	
6	PE-V9-411-XXX-1911	UPS SIZING CALCULATIONS	I	-	VENDOR	C&I	
7	PE-V9-411-XXX-1912	BATTERY SIZING CALCULATIONS	I	-	VENDOR	C&I	
8	PE-V9-411-XXX-1913	CONTROL DESK LAYOUT / GA DRAWING	A	-	VENDOR	C&I	
9	PE-V9-411-XXX-1914	PLC-OWS/PRINTER FURNITURE BOM	A	-	VENDOR	C&I	
10	PE-V9-411-XXX-1915	PLC CONTROL ROOM LAYOUT DRAWING	A	-	VENDOR	C&I	
11	PE-V9-411-XXX-1916	PLC CATALOGUE	I	-	VENDOR	C&I	
12	PE-V9-411-XXX-1917	PLC QUALITY PLAN & FAT PROCEDURE	A	-	VENDOR	C&I	
13	PE-V9-411-XXX-1918	LIST OF SIGNAL EXCHANGE WITH DDCMIS (BOTH HARDWIRED & SERIAL INTERFACE IN BHEL FORMAT)	A	-	VENDOR	C&I	
14	PE-V9-411-XXX-1919	PROCESS GRAPHIC MANUSCRIPTS PLC	I	-	VENDOR	C&I	
15	PE-V9-411-XXX-1920	PROCESS GRAPHIC MANUSCRIPTS FOR DDCMIS	I	-	VENDOR	C&I	
16	PE-V9-411-XXX-1921	CABLE SCHEDULE (IN BHEL EXCEL FORMAT) & CABLE INTERCONNECTION DETAILS	I	-	VENDOR	C&I	
17	PE-V9-411-XXX-1923	PANEL & ELECTRONIC EARTHING REQUIREMENT	I	-	VENDOR	C&I	
18	PE-V9-411-XXX-1924	PANEL HEAT DISSIPATION DATA	I	-	VENDOR	C&I	
19	PE-V9-411-XXX-1925	MANDATORY SPARES BILL OF MATERIAL	A	A	VENDOR	C&I	
20	PE-V9-411-XXX-1926	PLC O & M MANUAL	I	-	VENDOR	C&I	
21	PE-V9-411-XXX-1927	PLC EARTHING SCHEME	I	-	VENDOR	C&I	
	Notes:	411 - Project No					
		XXX -SI No of MAX Package					
		\$\$ -Approval by BHEL if Vendor BBU Item Approval by Customer if Customer BBU Item					

Arvind

S A Khan

Praveen Kishore



TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

SECTION C - 4
Material Handling Equipments Specification



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

1.0 ELECTRIC HOIST AND MANUAL HOIST (CHAIN PULLEY BLOCK)

Required number of electric hoist / manual hoist of adequate capacity, to meet the erection and maintenance requirements are to be provided for the various areas where handling weight is more than 500 kg.

Manual hoists (hand operated) shall be designed to duty class 2 as per IS 3832 and electric wire rope hoist shall be designed as per IS: 3938 (latest).

The stipulations of all statutory codes like Indian Electricity Act, Indian Electricity Rules, Factory Acts, Local Municipality act etc. shall however prevail over the specification requirements, in case any conflict arises between this specification and the statutory codes.

Maintenance tools and tackles shall be as per data sheet attached.

DESIGN CRITERIA

For the hoists with more than 2.0 tonne lifting capacity and/ or more than 10.0 M lift i.e. either capacity or lift is more than 2T or 10 m, Electrical hoist shall be provided. Less than or equal to 2T and lift $\leq$ 10m hoist blocks shall be of hand operated type for both travel and lift.

However, all monorails coming out of the building shall be provided with electric hoist block, irrespective of load and lift.

Capacity of electric and manual (Chain pulley block) hoists shall be decided keeping 25% margin over heaviest equipment to be handled.

For hand operated hoists, the hoists shall be suitable for operation from floor level. Hand chain shall be provided for long travel of trolley and the Hoisting mechanism. For electric hoist, operator shall be able to control the movement of the electrical hoist with the help of floor operated pendant

MINIMUM LIFTING REQUIREMENT

Sl.N.	Area / Equipment description	Qty (nos)	Capacity (T)	Lift (m)	Travel (m)
1					

Note;

1. Area, type, capacity mentioned are minimum requirement and shall be finalized during detail engineering without any commercial implication
2. Travel and Lift are layout dependent and shall be finalized during detail engineering without any commercial implication
3. Additional electric/manual hoist required during detail engineering shall be provided as per design criteria given above without any commercial implication.



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

2.0 SCOPE OF SUPPLIES

Equipment and services to be furnished by the bidder for the ELECTRIC HOIST/ MANUAL HOIST with accessories as per the details given in the technical specification and data sheet A. Any equipment / accessories not specified in the specification but required to make the ELECTRIC HOIST/ MANUAL HOIST complete and efficient operation shall also be under the bidder's scope of work.

Compliance with this specification shall not relieve the bidder of the responsibility of furnishing material and workmanship to meet the specified working/duty conditions.

2.1.0 ELECTRIC HOIST

Electric hoist shall include but not be limited to the following: -

- a. Hoisting and CT drive arrangement
- b. All electrical equipment including cables (as per electrical scope matrix) and panels.
- c. PVC insulated shrouded bus bar DSL
- d. Earthing arrangement.
- e. Fill of lubricant till commissioning / handling over to customer.
- f. Painting of electric hoist and accessories.
- g. Maintenance tools & Tackles
- h. Erection & Commissioning spares
- i. Isolating switch in enclosure at operating floor for disconnecting supply to DSL while maintaining the electric hoist.
- j. Mandatory spares

2.2.0 MANUAL HOIST (CHAIN PULLEY BLOCK)

Manual hoist shall include but not be limited to the following:

- a. Chain pulley blocks with/without traveling trolleys
- b. Maintenance Tools and Tackles
- c. Mandatory spares

2.3.0 Erection and Commissioning spares (ELECTRIC HOIST)

The Bidder shall also supply erection & commissioning spares along with his main equipment as per his experience, for replacement of damaged or unserviceable parts during the execution of the project at site, to avoid delay in the project schedule. This shall form part of the main equipment supply. The Purchaser shall retain the unutilized commissioning spares. The initial fill of lubricants, oil etc. shall also be supplied by the bidder.

2.4.0 Services to be provided by the bidder

Packing, forwarding and transportation to site, storage and handling at site.

2.5.0 Erection and Commissioning

2.6.0 Functional test (Overload testing, load testing at rated speed, travel and hoisting motion checks as per relevant Indian standards)

2.7.0 Obtaining clearance and acceptance certificate from the concerned competent authority after site test as applicable. Necessary fees/expenditure as required shall be borne by the supplier.

3.0 Inspection and Testing

Inspection and testing shall be carried out as per enclosed standard quality plan approved QAP and as per IS 3938 (latest revision). Prime inspection agency shall be NBPPL/End Customer. Equipment supplied shall be strictly in accordance with nomenclature & technical specification. Any additional testing requirement/ CHP(Customer Hold Point) at any stage of inspection deemed necessary by Customer/NBPPL during detailed engineering shall be carried out without any commercial or technical implication.

4.0 Works Excluded

Supply of ISMB monorail.



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

5.0 PAINTING SPECIFICATION

As per painting details specified elsewhere in specification.

ELECTRIC HOIST COLOR SHADE:

Color shade: Structure: Golden Yellow, RAL 1004

Panel : paint shade RAL-9002 for complete panel except on end covers whose shade shall be RAL-5012.

However, same shall be finalized during detail engineering)

MANUAL HOIST COLOR SHADE:

Trolley: Lemmon yellow (Shade 355 as per IS 5)

Hook: Light grey (Shade 631 as per IS 5)

6.0 PACKING

As per packing details specified elsewhere in specification.

7.0 DEMONSTRATION TEST

Hoist along with its drives, controls and other accessories shall be demonstrated for the rated capacity against the rated speed of motions and for the service conditions specified as specified in QAP and as per IS 3938 for electric hoist and IS 3832 for manual hoist.

The bidder shall have the full responsibility for the safe and efficient operation of the hoist with associated accessories as a single unit.

If the shop/site performance tests indicate the failure of any of the components to achieve the guaranteed performance, the deficiency shall be made good at bidder's cost.

Demonstration tests shall be carried out each time after the rectification /modification is carried out.

8.0 MAKE OF SUB - VENDOR ITEMS

Makes of bought out items will be as per list specified in the specification. No other make will be acceptable, until and unless specifically got it approved by the purchaser/ end client.

9.0 TESTING AT SITE

A) ELECTRIC HOIST:

As required for statutory clearance for operating at site i.e., overload test, load test and other tests as per IS 3938.

Test for Operation -After the supply has been connected, tests shall be carried out to prove the following:

- The satisfactory operation of each controller, switch, contactor, relay and other control devices and in particular the correct operation of all limit switches under the most unfavorable conditions;
- The correctness of all circuits and interlocks and sequence of operation; and
- The satisfactory operation of all protective devices.

Overload Test -After test but before the hoist is put into service, it shall be tested with overload relays appropriately set, to lift and sustain a test load of 125 percent of the working load. During the overload test, the hoist shall sustain the load under full control. The specified speeds need not be attained but the hoist shall show itself capable of dealing with the overload without difficulty.

B) MANUAL HOIST:

As required for statutory clearance for operating at site with following minimum test i.e., overload and load test.



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

10.0 TECHNICAL DATA SHEET:

A) ELECTRIC HOIST:

Sl.no	DESCRIPTION	TECHNICAL PARTICULARS
1.0	Type	Steel wire electric hoist with electrically operated trolley
2.0	Scope (Qty., Capacity, Lift, Travel Length)	As per specification and layout requirement
3.0	Type of service	Indoor
4.0	Overload test	125% of SWL
5.0	Design Ambient temperature	50° C
6.0	General Design	As per IS: 3938 / 1983 or latest, Class-II duty
7.0	Operating speed	
7.1	Hoisting speed	3 MPM.
7.2	Trolley speed	15 MPM
8.0	Type of transmission	Through Electric motor and gear box.
9.0	Wire Rope	
9.1	Construction / core	6 x36/ 6X37 (Steel core / fibre core)
9.2	Code	IS:2266
9.3	Number of falls	Min. 4
9.4	Factor of safety	Not less than 5
10.0	Load Hook and block	NORMALISED HOOK ONLY
10.1	Type of load hook	Plain shank trapezoidal section with safety latch.
10.2	Load hook Code	IS: 15560
10.3	Load hook Material	As per IS:15560
10.4	Hook suspension	Thrust bearing
10.5	Material of block suspension	Fabricated from steel plate, Material: IS: 2062
11.0	Gearing	
11.1	Type	Spur / Helical
11.2	Gear/ pinion material	as per IS 3938
11.3	Lubrication	Oil splash/ grease lubricated
11.4	Bearing type	Antifriction Ball / Roller
12.0	Trolley drive	
12.1	Wheel	Single flange taper thread



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

12.2	Wheel conform to (Std. / code)	IS: 3938
12.3	Wheel material	C55Mn75/ En-8/ En-9. (Max hardness 200 BHN)
12.4	Bearing type	Antifriction Ball / Roller
12.5	Trolley type	Rolled structural steel with side plates extended beyond wheel flanges to protect wheels.
12.6	Hardness	Max hardness 200 BHN
13.0	SHEAVE	
13.1	Material	Fabricated from steel plate. IS: 2062 Gr. A or Gr. B / as per IS: 3938
13.2	Bearing type	Antifriction Ball / Roller.
14.0	BRAKE (HOIST and TROLLEY)	
14.1	Type	DC EM brakes disc type (fail to safe).
14.2	Capacity	As per IS 3938.
14.3	Number	One number for each motor.
15.0	ROPE DRUM	
15.1	Material	Cast iron, cast steel or mild steel.
15.2	Flange / Flangeless	Flanged
15.3	Type of groove	As per manufacturers standard to suit the layout requirement.(Shall be decided during detail engineering)
17.0	TYPE OF DSL	
17.1	CT travel	PVC Shrouded bus bar conductor type DSL
18.0	MOTORS	
18.1	Type	Sq. Cage induction, TEFC, S4 duty, 40% CDF.
18.2	Number of start	150 starts / hr
18.3	Voltage , Phase and Frequency	415V $\pm$ 10%, 3 phase, 4 wire, 50 Hz
18.4	Class of insulation	Class "F" and temperature rise limited to class B.
18.5	Type of enclosure	TEFC
18.6	Degree of protection provided for enclosure	IP-54/IP-55 depending upon Indoor / Outdoor application
18.7	Margin	Motor rating will be calculated keeping margin of at least 10% over the maximum power requirement in the duty condition specified.
19.0	LIMIT SWITCHES	Hoisting Trolley
19.1	Type	Snap action, self actuating type Lever type



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

20.0	Control panel	* Fabricated from Cold rolled sheet steel not less than 2.5mm for front & rear & 2mm for side, top & bottom portion with gland plate of 3mm thick. * Degree of protection shall be IP 54. * Power on indicating lamps shall be provided * Panel illumination lamps operated by door switch. * 2 nos earthing terminals on panel. * 20 % spares terminals (clip on type) shall be provided. * Power and control terminals (clip on type) shall be on separate channels. * Gland plate shall be double brass compression type.
20.1	Qty	1 No.
21.0	Pendent Push buttons	Up /down / forward / Reverse push buttons. Indicative marking for easy operation shall be provided.
22.0	Power cables	FRLS / EPR flexible Cu cable / Aluminum cable
23.0	Control cable	FRLS / EPR flexible Cu cable / Aluminum cable
24.0	Control Voltage	110 V

B) MANUAL HOIST (CHAIN PULLEY BLOCK):

DATA SHEET-A

1	Type	Chain pulley block with/without travelling trolley
2	General Design	IS: 3832
3	Duty Class as per IS:3832	Class –II
4	Hoisting Mechanism	
a)	Type	Hand operated gear transmission
b)	Type of gear	Spur / Helical
c)	Load Chain	
i)	Type	Link type
ii)	Material	T (8) as per IS: 6216
iii)	Conforms to (Std./Code)	IS: 6216
d)	Hand Chain	
i)	Type	Link type
ii)	Material	Mild steel Grade 30
iii)	Conform to Std.	IS:2429 (Part I)
e)	Load Hook & Hook Block	
i)	Type of load hook	Plain shank- Trapezoidal section
ii)	Load hooks conforms to	IS: 15560
iii)	Type of hook suspension	Swivelling type with lock
iv)	Type of make of bearing	Thrust ball bearing of hook suspension
v)	Type & Material of hook	Carbon steel/forged steel As per IS 15560
f)	Gears/ Pinion	
i)	Type	Spur



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

ii)	Material	Alloy steel / carbon steel
iii)	Type of Bearing	Antifriction ball bearing / Roller
h)	Sprockets:	
	Type of bearings used	Antifriction ball bearing / Roller
i)	Method of lubrication	
	Bearings	Grease
	Gearing & Pinions	Grease
	Sprockets	Grease
j)	Brakes	
	Type	Screw and friction disc type
5	Trolley and Bridge drive	
a)	Trolley	
i)	Type	Geared (Manually operated)
ii)	Material of frame	Mild steel (IS:2062 Grade A or B)
b)	Drive Chain	
i)	Type	Link type
ii)	Material	Steel Gr.30 as per IS 2429 (part 1)
c)	Wheel	
i)	Number of pairs of wheel	Two in each trolley/bridge
ii)	Flange	Single flanged
iii)	Wheel material	Cast Iron Gr. FG 200 as per IS:210
iv)	Type of bearings need	Antifriction
d)	Gears	
i)	Type	Spur / helical
ii)	Material	EN8
iii)	Type of bearings used	Antifriction
e)	Method of lubrication for	
i)	Bearings	Grease
ii)	General	Grease
iii)	Sprockets	Grease
6	Painting	As per manufacturer standard

11.0 Maintenance Tools and Tackles

One (1) complete unused new set of special purpose tools, tackles and accessories along with detailed instructions and maintenance manual shall be supplied for each EH/CPB. Tools shall be of suitable sizes for maintenance of electric hoist of each type and capacity. Each tool shall be stamped so as to be identified easy for its use. The tools shall be supplied in steel toolbox. The items supplied shall be of the best quality, specially protected against rusting. The following shall be provided as minimum requirement:

S-No.	Description	Qty.
1	Complete set of ring spanners (Indicate the sizes offered)	1 Set
2	Complete set of screwdrivers (Indicate the sizes)	1 Set
3.	Adjustable Spanner	1 No.
4.	Insulated plier	1 No.
5.	Grease gun	1 No.



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

6. Oil gun

1 No.

7. Line tester

1 No.

Note:- Bidder shall ensure that the tools & tackles mentioned in above list are sufficient to handle all sizes/capacities of hoists & in case any other /additional tool is required for handling/maintenance any size/capacity of hoist the same shall be included in this list.

12.0 DRAWING/DOCUMENT SUBMISSION

The successful bidder shall submit the following drawings / documents during detail engineering for customer's approval /information:

A) ELECTRIC HOIST

Sl. No.	BHEL DRG.NO	DRAWING TITLE
1	PE-V0-XXX-563-A100	Manufacturing Quality Plan with Sub vendor list
2	PE-V0-XXX-563-A101	GA Drawing for Electric Hoist, DSL arrangement and painting details
3	PE-V0-XXX-563-A102	Schematic Circuit Diagram
4	PE-V0-XXX-563-A103	Mechanism Sizing Calculation
5	PE-V0-XXX-563-A104	Detailed BOM/BOQ for EH
6	PE-V0-XXX-563-A105	O & M Manual including Erection procedure
7	PE-V0-XXX-563-A106	Mandatory spare parts list

C) MANUAL HOIST (CHAIN PULLEY BLOCK):

Sl. No.	BHEL DRG.NO	DRAWING TITLE
1	PE-V0-XXX-563-A200	Manufacturing Quality Plan
2	PE-V0-XXX-563-A201	GA Drawing for Chain Pulley Block with detail BOM with painting details
3	PE-V0-XXX-563-A202	O & M Manual including Erection procedure

Notes;

- The above drawing list is tentative and shall be finalized with the successful bidder after placement of order.
- Drawings shall be prepared in Auto-Cad latest edition. Required no. of hard and soft copies (editable) of the drawings shall be furnished as per requirement specified elsewhere in the specification.
- All the drawings and documents including general arrangement drawing, data sheet, calculation etc. to be furnished to the customer during detailed engineering stage shall include / indicate the following details for clarity w.r.t. Inspection, construction, erection and maintenance etc.:-
 - All drawings and documents shall indicate the list of all reference drawings including general arrangement.
 - All drawings shall include / show plan, elevation, side view, cross - section, skin section, blow - up view; all major self-manufactured and bought out items shall be labeled and included in BOQ / BOM in tabular form.
 - Painting schedule shall also be made as a part of general arrangement drawing of each equipment / items indicating at least 3 trade names.
 - All the drawings required to be furnished to customer during detailed engineering stage shall include technical parameters, details of paints and lubrication, hardness and BOQ / BOM in tabular form indicating all major components including bought out items and their quantity, material of construction indicating its applicable code / standard, weight, make etc.



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

- e) Drawings/ documents to be submitted for purchasers review/ approval shall be under Revision A, B, C... etc. while drawings /documents to be submitted thereafter for customer's approval after purchaser's approval shall be under R-0, 1, 2, 3etc.

13.0 MANDATORY SPARES:

As per list below.

1.11	HOISTS (for each type and rating, hoists)	
1.11.1	Bearings for long travel wheels	2 sets
1.11.2	Bearings for gear boxes for each type of hoist	2 sets
1.11.3	Break liners for all the brakes	100% of total population of each type & size
1.11.4	Oil seals	100% of total population of each type, size rating
1.11.5	Brake springs for all brakes	-do-
1.11.6	Wire ropes for hooks	100% installed on each crane and hoist
1.11.7	Solenoid coils for brakes	2 sets
1.11.8	Overload relay for motors	2 Nos.
1.11.9	Limit switches for hoists and travel mechanisms	2 sets
1.11.10	Spare motors for hoists	2 Nos.
1.11.11	Long travel machinery	
	i. Gear wheel	1 set
	ii. Internal clip	2 Nos.
	iii. Pinion	1 No.
1.11.12	Chain pulley block	
	i. Load chain wheel	1 No.
	ii. Load chain stripping fork	5 Nos.
	iii. Hand chain wheel	2 Nos.
	iv. Ratchet pawl	1 No.
	v. Locking ratchet wheel	2 Nos.
	vi. Guide roller	2 Nos.
	vii. Brake disc	2 Nos.
2	Electrical Items	
2.1	Trailing Cable	One set of full length of each size/type of cables as used for each type of Electrical Hoist
2.2	415 Volt Motor (Up to 30KW Rating)	
a	Driving End & Non-Driving End Bearing	3Set for each type and rating of Motor
b	Cooling Fan	2No. for each type and rating of Motor
c	Motor Terminal Block	5Nos. for each type and rating of Motor
d	Complete Set of Coupling	1Set for each Application
2.3	Control Panel	
a	Back-up panel mounted devices (Selector switches/ Push buttons/ Indicators etc.	5% of installed capacity
b	Lamps/ LEDs	100% of the total quantity
c	Blank Tiles	10% of installed capacity
d	MCBs	10% of each type & rating
e	Fuses/ Fuse holder	100% of each type & rating



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

14.0 MAKES:**MAKES OF ELECTRIC HOIST AND CHAIN PULLEY BLOCK AS PER LIST BELOW:**

Package Name	Vendor Name
ELECTRIC HOIST	Alpha Services
	CONSOLIDATED HOISTS PVT LTD
	CENTURY CRANE ENGINEERS PVT. LTD.
	EDDY CRANES PVT. LTD.
	Grip Engineers Pvt. Ltd.,
	GLOBAL TECHNOLOGIES
	HERCULES HOISTS LTD.
	LIFTING EQUIPMENTS and ACCESSORIES
	Mangla Hoists Pvt Ltd
	REVA INDUSTRIES LTD.
	ROCKWELL HOISTO CRANES PVT. LTD.
	SAFEX ENERGY PVT. LTD.
	TUOBRO FURGUSON (INDIA) PVT LTD
CHAIN PULLEY BLOCK	ARMSEL MHE PVT. LTD
	HERCULES HOISTS LTD.
	LIFTING EQUIPMENTS and ACCESSORIES
	TUOBRO FURGUSON (INDIA) PVT LTD
	TRACTEL TIRFOR INDIA PVT. LTD.

Note: No other make will be acceptable, until and unless specifically got approved by BHEL/Customer / Customer's consultant during detail engineering only. Acceptance/non acceptance of same shall not have any impact on manufacturing, delivery schedule and on cost of the Electric hoists

MAKES OF SUB VENDORS ITEMS AS APPLICABLE TO ELECTRIC HOIST:

Sl no.	ITEM	MAKES
1.0	STEEL	SAIL/IISCO/TATA STEEL / JINDAL
2.0	HOOKS	MOOZUMDAR / SIMRITI FORGING / HARMAN MOHTA / STEEL FORGING & ENGG. CO., KOLKATA /
3.0	GEAR COUPLINGS	ALLIANCE / HICLIFF / OEM
4.0	WIRE ROPE	USHA MARTIN Black / BOMBAY WIRE ROPES / FORT WILLIAMS / UNITED WIRE ROPE/BHARAT WIRE ROPES.
5.0	BEARINGS	SKF/ FAG
6.0	MOTORS	SIEMENS/ ABB /NGEF/ CROMPTON /KIRLOSKAR /GECA / BHARAT BIJLI / MARATHON / LHP.
7.0	BRAKES	STROM CRAFT/ ELECTROMAG /SPEED-O- CONTROL / EMCO LENZE
8.0	CONTACTOR	SIEMENS / L&T /TELE MECHANIQUE / BCH
9.0	OVER LOAD RELAYS	SIEMENS / L&T / TELE MACHANIQUE / ABB
10.0	HRC FUSES	SIEMENS / L&T/ ENGLISH ELECTRIC/GE Power
11.0	ISOLATING SWITCH	SIEMENS/ L&T / CONTROL & SWITCH GEAR
12.0	SWITCH FUSE UNITS	SIEMENS/ L&T/ CONTROL/ & SWITCH GEAR/ GEC A
13.0	TIME DELAY RELAYS	SIEMENS/ L&T/ ABB/ BCH/ GEC A
14.0	TRANSFORMERS	INDCOIL/AE / LOGICSTAT/ PRAGATI / KAPPA / SOUTHERN ELECTRIC
15.0	BULB & FLOURESCENT TUBES/FITTINGS	PHILIPS/ BAJAJ/ CROMPTON
16.0	CABLE LUGS (HEAVY DUTY)	DOWELLS
17.0	CABLES	
a)	POWER CABLES	NICCO / UNIVERSAL / INCAB / FORT GLOSTER TORRENT / CCI / ICL / RADIANT / FINOLEX/ POLYCAB/KEI/HAVELL
b)	CONTROL CABLES	NICCO / UNIVERSAL / INCAB / FORT GLOSTER / DELTON / FINOLEX / TORRENT / CCI / ICL / RADIANT POLYCAB / KEI/ HAVELL.
c)	TRAILING CABLE	UNIVERSAL/ FGL/CCL/HVP/KEI/RADIANT.



**TECHNICAL SPECIFICATION FOR
ELECTRIC HOIST AND MANUAL HOIST
4X270 MW BHADRADRI TPS**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II - B

SECTION -C4

REV 00

DATE APRIL 2015

18.0	CABLE GLAND	COMMET / SIEMEN / SUNIL&CO.
19.0	PUSH BUTTONS	SIEMENS / L&T / BCH /TEKNIC/VAISHNO
20.0	LIMIT SWITCHES	SPEED-O-CONTROL / ELECTROMAG / JAI BALA JI / KAYCEE / BCH
21	SELECTOR SWITCHES	KAYCEE/ SULZER
22	PENDENT PUSH BUTTON STATION	OEM
23	INDICATING LAMPS	TECKNIC / BCH / SIEMENS / STANDARD/ VAISHNO
24	MCB	MDS / INDO COPP / STANDARD
25	PANELS	OEM/BCH
26	DSL	SUSHEEL/STROMAG
27	TERMINAL BLOCKS	ELMEX/CONNECTWELL/WAGO (FOR CONTROL ONLY)
28	VVVF	YASAKAWA(L&T)/ABB/SIEMENS/SCHNIDER
29	CASTING	KOLHAPUR STEEL / GNAT FOUNDARY / KIRTI ALLOYS
30	Tools & tackles	Reputed make

Note : 1 All the trailing cables shall be sourced from only one sub-vendor from the list
 2 No other make will be acceptable, until and unless specifically got approved by BHEL/Customer / Customer's consultant during detail engineering only. Acceptance/non acceptance of same shall not have any impact on manufacturing, delivery schedule and on cost of the Electric hoists/ CPB

REV: 00 DATE:

STANDARD ELECTRICAL SCOPE BETWEEN BHEL AND VENDOR (FOR EPC PROJECTS)

PACKAGE: ELECTRIC HOIST FOR AC PLANT

PROJECT : 4 X 270 MW BHADRADRI TPS

SCOPE OF VENDOR: SUPPLY , ERECTION & COMMISSIONING OF VENDOR'S EQUIPMENT

S. NO	DETAILS	SCOPE SUPPLY	SCOPE E&C	REMARKS
1	Isolating Switch	Vendor	Vendor	BHEL will provide one number 415 V(3ph, 4W) supply feeder only up to isolating switches for cranes. Any other voltage level (AC/DC) required will be derived by the vendor. Motor starter shall be part of crane control panel.
2	Power cables, control cables, screened control cables and any special cables (if required) between equipment supplied by vendor.	Vendor	Vendor	Cable from supply feeder to isolating switch shall be in BHEL scope.
3	Cabling material (cable trays, accessories, cable tray supporting system, conduits etc).	Vendor	Vendor	
4	Equipment Earthing	Vendor	Vendor	All equipment metallic enclosures / frames, metal structure etc. shall be grounded at two points each to the nearest grounding points / risers provided by BHEL.
5	Motors	Vendor	Vendor	
6	Cable glands and lugs for equipment supplied by vendor	Vendor	Vendor	1. Double compression Ni-Cr plated brass cable glands 2. Solder less crimping type heavy duty tinned copper lugs for power & control cables.
7	a) Input cable schedules (C & I) b) Cable interconnection details for above c) Cable block diagram	Vendor Vendor Vendor	- - -	Cable listing for Control and Instrumentation Cable in enclosed excel format shall be submitted by vendor during detailed engineering stage.
8	Equipment layout drawings	Vendor	-	
9	Electrical Equipment GA drawing	Vendor	-	For necessary interface review.

Anind

S A Khan

Praveen Kishore

MANUFACTURER'S NAME & ADDRESS:		MANUFACTURING QUALITY PLAN		PROJECT :	
ITEM : Chain Pulley Block		Q P No.: PE-TS-XXX-XXX-A001		PACKAGE : CHAIN PULLEY BLOCKS	
REV.:0, Date.:		PAGE: 2 OF 4		VOL IIB, SEC C	

Sr. No.	COMPONENT / OPERATION	CHARACTERISTICS	CLASS	TYPE OF CHECK	QUANTU M OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY	REMARKS
1.	2.	3.	4.	5.	6.	7.	8.	9.	M C N 10.	11.

						APPROVED DRAWING	APPROVED DRAWING			shall be given.
		INTERNAL DEFECTS	MA	UT	10%	ASTM A-388 (REFER NOTE 1)		✓	P	
1.4.	LOAD CHAIN WHEELS	- CHEMICAL COMPOSITION MECHANICAL PROPERTIES	MA	CHEMICAL MECHANICAL PROPERTIES	ONE SAMPLE PER LOT	APPD. DRG.	APPD. DRG.	✓	P	V
1.5	BEARINGS	MAKE, TYPE, CATALOGUE NO.	MA	VISUAL	RANDOM	APP DRG / MFR'S CATALOGUE	APP DRG / MFR'S CATALOGUE	✓	P	V
1.6	HAND CHAIN WHEEL	CHEMICAL MECHANICAL PROPERTIES	MA	CHEMICAL MECHANICAL PROPERTIES	ONE SAMPLE PER LOT	AS PER DRAWING	AS PER DRAWING	✓	P	V
1.7	HAND CHAIN	GRADE/ DIMENSION	MA	GRADE DIMENSION	100 %	AS PER DRAWING	AS PER DRAWING	✓	P	V
1.8	TROLLEY GEARS, PINION, WHEELS, AXLE	CHEMICAL & MECHANICAL	MA	LAB ANALYSIS,	100%	APPVD DRGS	APPVD DRGS	✓	P	V
2	IN PROCESS									
2.1	RATCHET PAWL / RATCHET WHEEL	-HARDNESS	MA	HARDNESS	100%	IS:3832 / APPD DRG.	IS:3832 / APPD. DRG.	✓	P	V

LEGEND:		FOR CUSTOMER USE	
** M : MANUFACTURER / SUB-CONTRACTOR C : BHEL / NOMINATED INSPECTION AGENCY. N : CUSTOMER INDICATE "P" PERFORM "W" WITNESS AND "V" VERIFICATION			
MANUFACTURER / CONTRACTOR			
SUB-CONTRACTOR			
SIGNATURE		REVIEWED BY	NAME & SIGN OF APPROVING AUTHORITY & SEAL

MANUFACTURER'S NAME & ADDRESS:		MANUFACTURING QUALITY PLAN		PROJECT :	
ITEM : Chain Pulley Block		ITEM : Chain Pulley Block		PACKAGE : CHAIN PULLEY BLOCKS	
QP No.: PE-TS-XXX-XXX-A001		REV.:0, Date.:		VOL IIB, SEC C	
		PAGE: 3 OF 4			

Sr. No.	COMPONENT / OPERATION	CHARACTERISTICS	CLASS	TYPE OF CHECK	QUANTUM OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY	REMARKS
1.	2.	3.	4.	5.	6.	7.	8.	9.	M C N 10.	11.

		-SURFACE CRACK	MA	DPT	100 %	ASTM E165	NO DEFECT	IR	✓	P	V	V	
2.2	GEARS AND PINIONS AFTER MACHINING	SURFACE HARDNESS HEAT TREATMENT, SURFACE CRACK, CASE DEPTH	MA	HARDNESS HT CHART, DPT FOR SURFACE CRACK	RANDOM ASTM E 165 FOR DPT	MFG STANDARD NO DEFECT	MFG STANDARD	IR	✓	P	V	V	
3.0	FINAL INSPECTION												
3.1	COMPLETE ASSEMBLY	OVERALL DIMENSION	MA	MEASUREMENT	100 %	IS:3832 /APPD DRG	IS:3832 /APPD DRG	IR	✓	P	W	V	
		PROOF LOAD TEST	CR	LOAD TEST	100%	-DO-	No cracks, flaws & other defects	IR	✓	P	W	V	
		LIGHT LOAD TEST	MA	LOAD TEST	100%	IS 3832	IS 3832	IR	✓	P	W	V	
		HEIGHT OF LIFT	MA	MEASUREMENT	100%	-DO-	-DO -	IR	✓	P	W	V	
		SWIVELING OF HOOK	MA	VISUAL	100 %	-DO-	-DO-	IR	✓	P	W	V	
		EFFORT	MA	PULL ON CHAIN	100%	-DO-	-DO-	IR	✓	P	W	V	
3.2	PAINTING	-CLEANING	MA	VISUAL	AT RANDOM	APPROVED	APPROVED	IR		P	--	--	
		- SHADE & DFT OF PAINT (Blue / Black)	MI	VISUAL	AT RANDOM	DRAWING/ SPECIFICATION	DRAWING/ SPECIFICATION	IR		P	W	-	

LEGEND:		FOR CUSTOMER USE	
MANUFACTURER / SUB-CONTRACTOR			
SUB-CONTRACTOR			
SIGNATURE		REVIEWED BY	
		NAME & SIGN OF APPROVING AUTHORITY & SEAL	

*** M : MANUFACTURER / SUB-CONTRACTOR
 C : BHEL / NOMINATED INSPECTION AGENCY.
 N : CUSTOMER
 INDICATE "P" PERFORM "W" WITNESS AND "V" VERIFICATION

MANUFACTURER'S NAME & ADDRESS:		MANUFACTURING QUALITY PLAN		PROJECT :	
		ITEM : Chain Pulley Block		PACKAGE : CHAIN PULLEY BLOCKS	
		QP No.: PE-TS-XXX-XXX-A001		VOL IIB, SEC C	
		REV.:0, Date.:, PAGE: 4 OF 4			

Sr. No.	COMPONENT / OPERATION	CHARACTERISTICS	CLASS	TYPE OF CHECK	QUANTUM OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY	REMARKS
1.	2.	3.	4.	5.	6.	7.	8.	9.	M C N 10.	11.

3.3	NAME PLATE	VERIFICATION	MA	VISUAL	100%			IR	P V --	
3.4	PACKING	-VERIFICATION	MI	VISUAL	100%	SPECS.	SPECS.	IR	P -- -	
3.5	REVIEW OF QA DOCUMENTATION	VERIFICATION	MA	VISUAL	100%	APPD. QP	APPD. QP	✓	V V V	


CR – CRITICAL, MA – MAJOR , MI – MINOR

NOTE 1: BACK WALL ECHO SHALL BE ADJUSTED TO 100% OF FULL SCREEN HEIGHT IN SOUND (DEFECT FREE) AREA. DEFECT ECHO HEIGHT MORE THAN 20% OF SCREEN HEIGHT SHALL BE TREATED AS UNACCEPTABLE. BACK WALL ECHO SHALL NOT BE LESS THAN 80% OF SCREEN HEIGHT IN ANY CASE.

NOTE 2: RECORDS IDENTIFIED WITH TICK SHALL BE ESSENTIALLY INLCUDED IN QA DOCUMENTATION.


Anvud


S A Khan


Praveen Kishore

LEGEND:		FOR CUSTOMER USE	
MANUFACTURER / CONTRACTOR	*** M : MANUFACTURER / SUB-CONTRACTOR C : BHEL / NOMINATED INSPECTION AGENCY. N : CUSTOMER INDICATE "P" PERFORM "W" WITNESS AND "V" VERIFICATION		
SUB-CONTRACTOR			
SIGNATURE	REVIEWED BY	NAME & SIGN OF APPROVING AUTHORITY & SEAL	

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM LIST OF MAKES	SPECIFICATION NO. PE-TS-411-553-A001	
		VOLUME II B	
		SECTION C	
		REV 00	DATE: APRIL 2015
		SHEET 1 OF 4	

ANNEXURE-I

LIST OF MAKES



4X270 MW BHADRADRI TPS
AIR CONDITIONING SYSTEM
LIST OF MAKES

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II B

SECTION C

REV 00

DATE: APRIL 2015

SHEET 2 OF 4

Sl. NO.	ITEM / EQUIPMENT	SUB SUPPLIER
1	SCREW CHILLER	YORK / TRANE / CARRIER / KIRLOSKAR / DUNHAM BUSH / MCQUAY (DAIKIN) / BLUE STAR / VOLTAS
2	VAPOUR ABSORBTION MACHINE	VOLTAS / THERMAX
3	PRECISION PACKAGE UNITS	STULZ / UNIFLAIR / EMERSON / BLUEBOX / CLIMADENTA
4	PACKAGE UNIT	VOLTAS / BLUE STAR / CARRIER
5	SPLIT AIR CONDITIONER	VOLTAS / BLUE STAR / CARRIER / HITACHI / LG
6	AIR HANDLING UNITS	VOLTAS / BLUE STAR / ZECO / CARRYAIRE(FLAKT) / EDGETECH / ETHOS / SYSTEM AIR / WAVES AIRCON
7	AHU FAN (CENTRIFUGAL FAN)	CB.DOCTOR / FLAKT / KRUGER / NICOTRA / COMEFRI / MARATHON / PATEL AIR
8	CHILLED & CONDENSER WATER PUMP	BEST & CROMPTON / JYOTI / SAM TURBO / KBL / KSB / M&P / VOLTAS / BEACON-WEIR / WORTHINGTON / FLOWMORE / SULZER / BHARAT PUMPS & COMPRESSORS LTD / FLOWSERVE INDIA CONTROL PVT LTD / V-FLOW PUMPS & SYSTEMS CO
9	COOLING TOWER	PAHARPUR / MIHIR / PCT / FLOWTECH / BELL
10	INDUCTION MOTORS (LT)	SIEMENS / ABB / CGL / MARATHON / KEC / BHARAT BIJLEE / NGEF / JYOTI / LHP
11	AIR FILTER	PUROLATOR / FMI / ANFILCO / TENACITY / JOHN FOWLER / SPECTRUM / AIR TECH / PUROMATIC
12	AXIAL FANS / F.A. FANS	FLAKT / KHAITAN / PATEL / NICOTRA / SARLA / KRUGER / MARATHON / C DOCTOR
13	INSULTATION MATERIAL	BEARDSHELL / K-FLEX / PARAMONT/ ARMAFLEX / SUPREME / LLOYDS / UP TWIGA
14	BALANCING VALVE	ADVANCE
15	BUTTERFLY VALVE	AUDCO / FOURESS / INTER VALVE / BDK / WEIR BDK / TYCO / CRANE PROCESS / KEYSTONE
16	NON RETURN VALVE	LEADER / H.SARKAR / FLUID LINE / HI -TECH / CRESENT / A V VALVES / BANKIM & COMPANY / SHIVADURGA
17	GATE/GLOBE VALVES	CRESENT / BDK / AUDCO / FOURESS / KIRLOSKAR / SANT / BOMBAY METAL & ALLOYS / BANKIM / LEADER / H SARKAR / AV VALVES / VENUS PUMPS AND ENGG
18	3 WAY MIXING VALVE WITH ACTUATING MOTOR	SIEMENS BUILDING TECHNOLOGY / JOHNSON / BELIMO / HONEYWELL / RAPID CONTROL / ALC
19	MOTORIZED BUTTERFLY VALVE	ANERGY / ADVANCE / BELIMO / JOHNSON / HONEYWELL / SIEMENS

		4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM LIST OF MAKES		SPECIFICATION NO. PE-TS-411-553-A001	
				VOLUME II B	
				SECTION C	
				REV 00	DATE: APRIL 2015
				SHEET 3 OF 4	
20	Y / POT STRAINER	MULTITEX / GREAVES COTTON / JAYPEE / SANT / OTOKLIN / GRAND PRIX / GUJARAT OTOLIFT / DS ENGG / SAROJINI ENTERPRISE / BHATIA ENGINEERING / FILTERATION ENGINEERS INDIA PVT LTD / SUNGOV ENGINEERING			
21	PIPING - ERW	SURYA ROSHNI / TISCO / DADU PIPES / INDUS TUBE / WELSPUN / TATA / BST / JINDAL / SAIL			
22	PIPING - CS SEAMLESS (ASTM A 106)	ISMT / MAHARASHTRA SEAMLESS			
23	GI SHEETS FOR DUCTING	TISCO / INDIAN IRON & STEEL CO LTD. / RASHITRYA ISPAT NIGAM LTD. / ESSAR/ ISPAT INDUSTRIES / JSW STEEL / LLOYDS STEEL / BHUSHAN / TATA / SAIL / JINDAL			
24	FIRE DAMPER	TSC / CARRYAIRE / RAVISTAR (SYSTEM AIR)			
25	GRILL/DIFFUSER/VOLUME CONTROL DAMPER	AIR FLOW/ TSC /AIR MASTER/ CARYAIRE/RAVI STAR (SYSTEM AIR)			
26	STRIP HEATER	ESCORTS / RACOLD / DASPASS/ ALCO/ HEATCO / HOTSET			
27	PAN HUMIDIFIER	RAPID COOL/ HOTSET /ALCO			
28	RELIEF / PURGE VALVE	BRASSOMATIC			
29	THERMOSTATS	HONEYWELL / RANCO / PENN / DANFOSS / INDFOSS / JHONSON CONTROL /RANUTROL			
30	HUMID STAT	JHONSON CONTROL / HONEYWELL / PENN			
31	ANTI FREEZE THERMOSTAT	RANCO / HONEYWELL / PENN / DANFOSS / INDFOSS			
32	PRESSURE GAUGE	GENERAL INST CONSORTIUM / BELL / H.GURU INST / WAAREE INSTRUMENTS / H. GURU IND / FORBES MARSHALL / MANOMETER / A.N. INST / GAUGES BOURDON / GLUCK / WIKA / ASHCROFT / BAUMER TECHNOLOGIES			
33	TEMPERATURE GAUGE	H. GURU IND/ H.GURU INST/ FORBES MARSHALL/DETRIVE INST & ELECTRONICS / PYRO ELECTRIC /TOSHNIWAL BROSS / WAREE INSTRUMENTS / A.N.INST / GOA INSTRUMENTS / WIKA/ ASHCROFT / H GURU (SI)			
34	LEVEL GAUGE	GENERAL INSTRUMENTS / CHEMTROLS / SBEM, PUNE/ AUTOMAT MUMBAI /SIGMA / TOSHNIWAL / TECHNOMATIC / TELACO /LEVCON / D K INSTRUMENTS / PUNE TECHTROL / FLOW STAR			
35	PRESSURE SWITCH / DP SWITCHES	BELLS / DANFOSS / DK INSTRUMENTS/ DRESSER / SOR INC / VASU / SWITZER / INDFOSS / TRAFAG / GIC / ASHCROFT			
36	TEMPERATURE SWITCH	INDFOSS/ SEIMENS / DANFOSS/ DK INSTRUMENTS/ SOR INC / VASU / DRESSER / TOSHNIWAL / SWITZER			
37	FLOW SWITCH	SWITZER / LEVCON / DK INSTRUMENT / SBEM / V. AUTOMATE/ SIEMENS			
38	LEVEL SWITCH	SBEM / BLISS ANAND / HI TECH / RAMAN INST / SIGMA / SOR INC / WAREE INST / LEVCON / DK INSTURMENT / V ATUOMATE /CHEMTROLS / SIMENS / FLOW STAR / TRAC			
39	TRANSMITTERS	TAYLOR / ABB/BRISTOL BABCOCK / BIRLA KENT TAYLOR / BLISS ANAND /SBEM/ SMART INST / V AUTOMATION & INST / FISHER-ROSEMOUNT/ SIEMENS/ TATA HONEYWELL			

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM LIST OF MAKES		SPECIFICATION NO. PE-TS-411-553-A001	
			VOLUME II B	
			SECTION C	
			REV 00	DATE: APRIL 2015
			SHEET 4 OF 4	

40	SIGHT FLOW INDICATORS	SIGMA / LEVCON /V AUTOMAT / TELLACE /EUREKA / TATA HONEYWELL/BLISS
41	FLOW ELEMENT	BRISTOL BABCOCK / BALIGA /LIGHTING EQUIP /ENGINEERING SPECIALITIES /IL / MINCO/ MICRO PRECISION / STAR MECH
42	TEMPERATURE ELEMENT	GENERAL INST CONSORTIUM/ PYRO ELECTRIC /WAAREE INSTRUMENTS/ DETRIVE INST & ELECTRONICS / TOSHNIWAL
43	FLOW METER	EUREKA / INSTRUMENTATION ENGINEERS PVT LTD / PLACKA /TRAC / FLOW STAR/ SCIENTIFIC DEVICE
44	RH SENSOR/TEMP SENSOR	HONEY WELL /JOHNSON /SIEMENS / GENERAL INSTRUMENTS
45	PLC BASED PANEL	SIEMENS / SCHENIEDER / ROCKWELL / GE INTELLIGENT / HONEYWELL AUTOMATION / ABB
46	OWS / PC	HP / COMPAQ / DELL / HCL / IBM / LENOVO
47	PRINTER	HP / CANON / EPSON / XEROX / IBM / LEXMARK
48	UPS	HITACHI-HIREL / APC / DELTA / EMERSON / DB POWER / APLAB
49	FIBRE OPTIC CABLE	BIRLA ERICSON / FINOLEX / AKSH FIBRE
50	ANNUNCIATOR FOR PANEL	ICC / PECON/ PROCON
51	LT ADAPTER BOX FOR AL TO CU CABLE CONVERTOR	CONTROL DEVICE / SYSTEM POWER CONTROL / JACKSON / UNILEC / ELECTRIC ALLIED PRODUCT
52	METERING PUMP	SHAPO TOOLS / VK PUMPS
53	WATER SOFTENING PLANT	THERMAX / ION EXCHANGE / DOSI ION
54	PRESSURE TRANSMITTER	ABB / ENDRESS + HAUSER (INDIA) / MOORE / SIEMENS / SMART INSTRUMENT BRAZIL / SBEM / TOSHNIWAL / V. AUTOMAT / EMERSON / YOKOGAWA / HONEYWELL / FUJI
55	TEMPERATURE TRANSMITTER	ABB / ENDRESS + HAUSER (INDIA) / MOORE / SIEMENS / SMART INSTRUMENT BRAZIL / SBEM / TOSHNIWAL / V. AUTOMAT / EMERSON / YOKOGAWA / HONEYWELL
56	ROTAMETER	CHEMTROLS SAMIL / EUREKA IND / IL / TRANSDUCERS AND CONTROL
57	BATTERY CHARGER	AMARARAJA/ CHHABI ELECTRICAL / DUBAS ENGG. / HBL POWER SYSTEM / STATCON / CALDYNE
58	BATTERY (NI -Cd)	HBL POWER / AMCO SAFT / SAFT

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM MANDATORY SPARE LIST		SPECIFICATION NO. PE-TS-411-553-A001	
			VOLUME II B	
			SECTION C	
			REV 00	DATE: APRIL 2015
			SHEET 1 OF 5	

ANNEXURE-II

MANDATORY SAPRE LIST

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM MANDATORY SPARE LIST		SPECIFICATION NO. PE-TS-411-553-A001	
			VOLUME II B	
			SECTION C	
			REV 00	DATE: APRIL 2015
			SHEET 2 OF 5	

LIST OF MANDATORY SPARES FOR AC SYSTEM

S.No.	Items	Quantity	Remarks
1.1	Vapour absorption machine		
1.1.1	Manometer	1 no	
1.1.2	Diaphragm	1 set	
1.1.3	Sampling kit	1 set	
1.1.4	Generator temp. sensor	1 no	
1.1.5	Generator pressure switch	1 no	
1.1.6	Anti-freeze thermostat	1 no	
1.1.7	Service valve	1 no	
2.1	Screw Chiller		
2.1.1	Bearing for the compressor	1 Set for each rating of compressor	
2.1.2	Gaskets as applicable for Condenser & Chiller Heads	1 Set for each rating of chiller	
2.2	Centrifugal Pump		
2.2.1	Bearings for each pump and motor	1 Sets for each rating of pump & motor	
2.2.2	Mechanical seal / gland packing as applicable, wearing rings and lantern rings for shaft and impeller	1 Set for each type and rating of pump	
2.2.3	Complete Impeller Assembly	1Set for each application and ratings of Pumps	
2.2.4	Key for impeller	1No. for each application and ratings of Pumps	
2.2.5	Pump shaft	1No. for each application and ratings of Pumps	
2.2.6	Coupling	1No. for each application and ratings of Pumps	
2.3	Cooling Tower		
2.3.1	Spray nozzles	10% of each rating of cooling tower	
2.3.2	Set of fills	10% of each rating of cooling tower	
2.3.3	Bearings for each fan and motor	1 Sets for each rating of fan & motor	
2.4	Refrigerant & Oil		
2.4.1	Refrigerant gas in a non-returnable cylinder	15% of installed charge	
2.4.2	Filter oil in sealed tins for the full set for 6 operations of cleaning	As required	
2.5	Air Handling Units		
2.5.1	Bearings for each AHU fan & motor	1 Set for each rating of fan	
2.5.2	V-Belts	1 Set for each type of AHU	
2.5.3	Filters of each type	1 Set for each type of AHU	
2.6	Centrifugal fans		
2.6.1	Bearings for fan & motor	1 Sets for each rating of fan & motor	
2.6.2	V-belts	1 Set for each rating of fan	

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM MANDATORY SPARE LIST	SPECIFICATION NO. PE-TS-411-553-A001	
		VOLUME II B	
		SECTION C	
		REV 00	DATE: APRIL 2015
		SHEET 3 OF 5	

2.6.3	Vibration Isolators	1 set for each rating of fan	
2.7	Precision Air Conditioners / Package Air Conditioners		
2.7.1	Filters	1 set for each PAC unit	
2.7.2	Bearings	1 set for each rating of PAC unit (both for condenser & Indoor Unit)	
2.7.3	Expansion valve	1 set for each rating of PAC unit	
2.8	Mandatory Spares for Programmable Logical Control (PLC) and other Electronic System / Subsystem / PLC		
2.8.1	Function controller and control modules (10% of number for each type or minimum of 4 number for each type whichever is high.)	2 Lot	
2.8.2	Process I/O cards and drive modules (10% of the number of cards offered for the project from each category.)	2 Lot	
2.8.3	All other type of electronic modules like CPU of workstation, Power supply modules, communication modules, modules for Data highway / modules for LAN, controllers not covered above (10% of each type or minimum of 2 nos. of each type whichever is more).	2 Lot	
2.8.4	All cards, controllers, lamp and other components used in LVS.	2 Lot (10%)	
2.8.5	control logic power supply fuses at each current rating (Three times the one hundred percent spare replacement).	2 Lot	
2.8.6	Electric to pneumatic converters (10% of each type utilized with automatic control system using pneumatic drives or a minimum of one of each type, whichever is more.)	2 Lot	
2.8.7	Plug-in type keyboard	2 No. of each type	
2.8.8	Dot matrix Printer	2 No.	
2.8.9	CRT	2 No.	
2.8.10	DVDs	40 Nos.	
2.8.11	Printer ribbons /inking mechanism for colour printer.	20 Nos.	
2.8.12	Ribbons for dot matrix printer.	60 Nos.	
2.8.13	Data highway cable with adequate connectors.	500 Meters	
2.8.14	Hard disc drive unit as offered for system complete with accessories.	2 No.	
2.8.15	Interface cables for each type	4 Sets	
2.8.16	Power supply modules of each type and	2 Lot (10%)	



**4X270 MW BHADRADRI TPS
AIR CONDITIONING SYSTEM
MANDATORY SPARE LIST**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II B

SECTION C

REV 00

DATE: APRIL 2015

SHEET 4 OF 5

	rating		
2.8.17	Interposing / coupling relays of each type.	2 Lot (5% of total quantity)	
2.9	Mandatory Spares for Control Panels / Desks		
2.9.1	Crimping Pins	2 Roll	
2.9.2	Bulbs for indicating lights (Three times the one hundred percent spare replacement)	2 Lot	
2.9.3	control circuit fuses of each current rating (Three times, the one hundred percent spare replacement)	2 Lot	
2.9.4	Push buttons, electrical control switches and Illuminated push buttons etc	2 Lot (20%)	
2.10	Mandatory Spares for Un-Interruptible Power Supply System :		
2.10.1	Fuses (3 times, the one hundred percent spare replacement fuses shall be furnished with each panel board.)	2 Lot	
2.10.2	Electronic modules for UPS , Charger, static switch & stabilizer and DC power supply system with each set consisting of atleast one number of each type of electronic module for inverters, chargers, static switch, stabiliser etc.	2 Set	
2.10.3	Battery cells	2 Lot (10%)	
2.10.4	Thyrister without heat sink	2 Lot (10%)	
2.10.5	Semiconductor fuse	2 Lot (10%)	
2.11	LP VALVES		
2.11.1	LP Piping valves & traps - Complete assembly	5% or min. 1 no. (whichever is more) for each size, type & rating for total population	
2.11.2	Steam traps - Complete assembly	5% or min. 1 no. (whichever is more) for each size, type & rating for total population	
2.12	Mandatory Spares for Temperature Elements and Thermowells		
2.12.1	Thermocouple / RTD elements (10% of each type and length of elements , or a minimum of one number, whichever is more.)	2 Lot	
2.12.2	Thermowells for each type of temperature sensors (10% or a minimum of one for each type, whichever is more.)	2 Lot	
2.13	Mandatory Spares for Electronic Transmitters (for pressure, DP, Flow, level, Temperature) and Electrical		

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM MANDATORY SPARE LIST	SPECIFICATION NO. PE-TS-411-553-A001	
		VOLUME II B	
		SECTION C	
		REV 00	DATE: APRIL 2015
		SHEET 5 OF 5	

	Transducers.		
2.13.1	Transmitters and Electrical Transducers (10% of total number of offered for each model and type for the project or a minimum of one number, whichever is more)	2 Lot	
2.14	Mandatory spares for local gauges/switch (for Pressure, DP, Temperature, Flow, level , etc.)		
2.14.1	Local gauges/ Switch (for Pressure, DP, Temperature, Flow, level , etc.) (10% of total number of instruments offered for each model and type for the project or a minimum of one number, whichever is more.)	2 Lot	
2.15	CONTROL VALVES	FOR 1 UNIT	
2.15.1	DIAPHRAGM	2 NOS. OF EACH TYPE OF ACTUATOR	
2.15.2	GLAND PACKING	1 SET FOR EACH TYPE OF VALVE	
2.15.3	TRIM	1 SET FOR EACH TYPE OF VALVE	
2.15.4	GASKET	2 SET FOR EACH TYPE OF VALVE	
2.15.5	POSITION TRANSMITTER COMPLETE SET	10 % of total quantity used in the system for each type & model	
2.15.6	complete set of solenoid valve for on/off valve	5 nos. for each type & ratings	
2.15.7	Position limit switch	5 nos. for each type & ratings	
2.16	Electrical Spares for Motors		
2.16.1	Motor bearing set for AHU fan motor	1 set for each type and rating of fan motor	
2.16.2	Motor bearing set for fresh air fan motor	1 set for each type and rating of fan motor	
2.17	Material handling equipment spares as applicable	As specified under Section C-4 of Volume II-B “Material handling equipment specification”.	
NOTE			
1.	Unless stated otherwise, a "set" or "Lot" means items required for complete replacement in one equipment of each type / size/ range.		
2.	Wherever quantity has been specified as percentage (%), it shall mean percentage (%) of the population of the item required for one unit of 270 MW in the station (project), unless specified otherwise.		
3.	In case of Bought Out items, itemised spares list may be vendor specific and may differ from the list of spares mentioned above. In such cases, The quoted price shall be considered for applicable items only without any change in the contract price.		

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM		SPECIFICATION NO. PE-TS-411-553-A001	
			VOLUME II B	
			SECTION C	
			REV 00	DATE: APRIL 2015
			SHEET 1 OF 2	

ANNEXURE-III

WATER ANALYSIS



**4X270 MW BHADRADRI TPS
AIR CONDITIONING SYSTEM**

SPECIFICATION NO. PE-TS-411-553-A001

VOLUME II B

SECTION C

REV 00

DATE: APRIL 2015

SHEET 2 OF 2

DESIGN CLARIFIED WATER ANALYSIS

SL. NO.	Constituent	Unit	Value
1.	pH	-	7.73
2.	Color and Odor	-	-
3.	Oil and grease	mg/l	-
4.	BOD	-	-
5.	COD	-	-
6.	Suspended solids	mg/l	≤10
7.	Turbidity	NTU	16
8.	Calcium as Ca	mg/l	60
9.	Magnesium as Mg	mg/l	34
10.	Sodium as Na	mg/l	-
11.	Potassium	mg/l	-
12.	Total Hardness as CaCO ₃	mg/l	94
12.	Chloride as Cl	mg/l	30
13.	Sulphate as SO ₄	mg/l	58
14.	Sulphide	mg/l	-
15.	Total Alkalinity as CaCO ₃	mg/l	140
16.	P-Alkalinity as CaCO ₃	mg/l	-
17.	Nitrates as NO ₃	mg/l	-
18.	Nitrite	mg/l	-
19.	Silica as SiO ₂	mg/l	5.2
21.	Iron as Fe	mg/l	0.007
23.	Total dissolved solids	mg/l	218
24.	Conductivity at 25 degree C	Micro Siemens /cm	328
25.	Dissolved Oxygen as O ₂	mg/l	-
26.	Carbon dioxide free	mg/l	-

1. TEST REPORT BY ENVIRONMENT SUB-DIVISION (TSPGCL)

2. SAMPLE NAME:- GODAVARI RIVER WATER

2. LOCATION :- AT MANUGURU

3. SAMPLING DATE:- 09.10.2014

4. REPORTING DATE:- 10.10.2014

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM LIST OF TOOLS AND TACKELS		SPECIFICATION NO. PE-TS-411-553-A001	
			VOLUME II B	
			SECTION C	
			REV 00	DATE: APRIL 2015
			SHEET 1 OF 2	

ANNEXURE-IV

LIST OF TOOLS AND TACKELS

	4X270 MW BHADRADRI TPS AIR CONDITIONING SYSTEM LIST OF TOOLS AND TACKELS	SPECIFICATION NO. PE-TS-411-553-A001	
		VOLUME II B	
		SECTION C	
		REV 00	DATE: APRIL 2015
		SHEET 2 OF 2	

LIST OF TOOLS & TACKLES FOR AC SYSTEM

FLAT D WRENCH - 6 MM TO 32 MM (12 Pcs)	SET	1
BOX WRENCHES - 6 MM TO 22 MM (14 Pcs)	SET	1
RING SPANNER - 6 MM TO 32 MM (12 Pcs)	SET	1
ALLEN KEYS - 2 MM TO 10 MM	SET	1
CRESCENT SCREW SPANNER	NO.	1
SCREW DRIVER	NO.	1
OFFSET SCREW DRIVER	NO.	1
INSULATED PLIER	NO.	1
TORCH LIGHT FOR 2 CELL	NO.	1
HAMMER 1 LB	NO.	1
OIL CAN	NO.	1
POCKET THERMOMETER - 0 TO 50 DEG. C)	NO.	1
INSULATION TAPE ROLL	NO.	1
STEEL FOOT RULE - 12"	NO.	1
FEELER GAUGE 9 BLADES	NO.	1
PIPE WRENCH	NO.	1
FLARE NUT (1/4")	NOS.	6
FLARING TOOL	NO.	1
TUBE CUTTER	NO.	1
GAS CHARGING PIPE	NO.	1
NITROGEN CHARGING ADAPTER	NO.	1
FREON PRESSURE GAUGE (2 1/2" DIA DIAL)) 0 - 300 MM PSI	NO.	1
FREON PRESSURE GAUGE (2 1/2" DIA DIAL)) 30 - 150 MM PSI	NO.	1
PSYCHRO METER	NO.	1
LOCK WITH KEY FOR TOOL BOX	NO.	1
RATCHET 1/4"	NO.	1
MS TOOL BOX	NO.	1
Tools and tackles for Material handling equipment		As specified under Section C-4 of Volume II-B "Material handling equipment specification".
NOTE: - Above list is bare minimum requirement, any other tools and tackle, if required, shall be provided by bidder without any commercial implication to BHEL/Customer.		



TECHNICAL SPECIFICATION
FOR AIR CONDITIONING SYSTEM
4 X 270 MW BHADRADRI TPS,

SPECIFICATION NO. PE-TS- 411-553-A-001

VOLUME II B

SECTION C

REV 00

APRIL 2015

SHEET 1 OF 2

ANNEXURE- V

DRAWING AND DOCUMENTS SUBMISSION PROCEDURE