

NTPC LIMITED
2X800 MW NTPC KARIMNAGAR TELANGANA STPP PHASE-I
(SG ISLAND PKG.)

TECHNICAL SPECIFICATION
FOR
PLATE HEAT EXCHANGERS

Specification No. : PE-TS-424-179-N001 (REV 0)



BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT
NOIDA-201301



TITLE :
TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS

SPECIFICATION NO. PE-TS-424-179-N001

SECTION

REV. NO. 0

DATE 12.10.17

CONTENTS

This Technical Specification consists of three Sections:

SECTION TITLE

SECTION I SPECIFIC TECHNICAL REQUIREMENTS

IA SPECIFIC TECHNICAL REQUIREMENTS.

IB DATA SHEET – A.

SECTION II STANDARD TECHNICAL REQUIREMENTS

IIA STANDARD TECHNICAL SPECIFICATION & STANDARD QUALITY PLAN.

SECTION III DOCUMENTS TO BE SUBMITTED BY BIDDER

IIIA COMPLIANCE CERTIFICATE (TO BE SUBMITTED BY BIDDER DURING TENDER STAGE).

IIIB GUARANTEE SCHEDULE (TO BE SUBMITTED BY BIDDER DURING TENDER STAGE).

IIIC DATASHEET –B & BALANCE DOCUMENTS AS PER CL. NO. 7 OF SECTION- IA (TO BE SUBMITTED BY SUCCESSFUL BIDDER AFTER AWARD OF CONTRACT).



TITLE :
TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS

SPECIFICATION NO. PE-TS-424-179-N001

SECTION I

REV. NO. 0

DATE 12.10.17

SECTION I

IA SPECIFIC TECHNICAL REQUIREMENTS

IB DATASHEET – A



TITLE :
**TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS**

SPECIFICATION NO. PE-TS-424-179-N001

SECTION IA

REV. NO. 0 DATE 12.10.17

SHEET 1 OF 3

1.0 GENERAL :

This enquiry covers the design, manufacture, assembly, inspection and testing at manufacturer's and/ or his sub-contractors works, painting, proper packing & delivery of the item namely **PLATE HEAT EXCHANGERS** complete with all mandatory spares, accessories, commissioning spares (if any), counter flanges with nuts, bolts, gaskets and coatings (wherever necessary), including special tools & tackles (if any) including PG test at site as mentioned in this specification for:

2X800 MW NTPC KARIMNAGAR TELANGANA STPP PHASE-I (SG ISLAND PKG.)

The Plate heat Exchangers complete with all accessories including special tools and tackles (if any) shall conform to the Data Sheet-A (Section IB) and other requirements of section IIA. In addition, the requirements of this Section IA including Customer Specification attached at Appendix 1 shall also be complied with. In the event of Contradictions between Section IA /Customer Specification (Appendix 1)/ Datasheet A (Section IB), the same shall prevail in the order as:

Customer Specification (Appendix 1), Section IA, Datasheet-A (Section IB).

2.0 SYSTEM DESCRIPTION :

- 2.1 The Plate Heat Exchanger are intended to be used in closed circuit DM cooling water circuit for Cooling Hot passivated DM Water by Auxiliary Cooling Water (Clarified Water).
- 2.2 Passivated DM Water is circulated through various auxiliary coolers of SG Aux., in closed loop by means of pumps. This DM water picks up heat from different cooling equipment's. Heat from DM water is transferred to auxiliary cooling water (Secondary side) thru' the Plate Heat Exchangers covered under this specification.
- 2.3 The analysis of DM Water, Clarified Water (Auxiliary cooling water) to be handled by the Plate Heat Exchangers are attached as Annexure to Data Sheet-A.
- 2.4 A strainer of 2 mm size at ACW inlet lines of PHE is provided and backwashing of PHE's is not envisaged.

3.0 SCOPE OF SUPPLY :

- 3.1 The details of the Plate Heat Exchangers with the quantity, design parameters etc. to be supplied shall be as per Data Sheet-A enclosed at Section IB.
- 3.2 Each Plate Heat Exchanger (quantity and other details specified in Data Sheet-A) shall be complete with the following accessories and auxiliaries.
 - (i) Suitable drain and vent connections for both primary (DMCW) and Secondary Water (ACW) streams complete with isolation valves.
 - (ii) Supporting arrangement complete with foundation plate channels, anchor bolts, nuts, sleeves, inserts etc.
 - (iii) Lifting arrangement i.e., lifting lugs, eye bolts etc.
 - (iv) Matching counter flanges with necessary bolts, nuts, and gaskets for all flanged terminal points, including for DMCW and ACW inlet/outlet nozzles &



TITLE :
**TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS**

SPECIFICATION NO. PE-TS-424-179-N001

SECTION IA

REV. NO. 0 DATE 12.10.17

SHEET 2 OF 3

- reducers/expanders.
- (v) Inspection ports at the End plates of the PHE.
 - (vi) Other accessories as required to make PHE's complete in all respects.
 - (vii) Commissioning spares, if any.
 - (viii) One Ratchet spanner for each type of PHE is included in bidder's scope of supply.
 - (ix) Matching piece (Reducer/Expander), with coatings (as required), to match the PHE nozzle connection with connecting pipe size at DMCW Side (Primary) and ACW side (secondary side), as indicated in Data Sheet A. In case of sea water Matching piece on ACW side (secondary) shall be flanged with coatings (as required for sea water application)
 - (x) Mandatory spares as applicable as per Data sheet A.

3.3 Finish paints for touch up painting of equipment after erection at Site in sealed containers.

4.0 INSPECTION REQUIREMENTS

- 4.1 Inspection for "Pressing of plates to form whole corrugation of the heat transfer plate" shall be from third party like TUV/Lloyd and certificate shall be submitted for review of BHEL.
- 4.2 Minimum requirement for quality Plan shall be as per quality plan attached in the Section IIA of the specification. Manufacturing Quality Plan for PHE shall be subject to approval during detail engineering. No price implication shall be admissible to QP approval by BHEL/Customer.
- 4.3 Heat transfer area for the PHE as offered by bidder with technical offer shall be measured by White light scanning method during contract stage to ascertain the correctness of heat transfer area as offered by bidder.

Bidder to note that Heat Transfer Area measured by White Light Scanning during contract stage should not have negative tolerance more than 3% w.r.t to the heat transfer area indicated by bidder against the offered model of PHE. However in the case of negative tolerance (limited to maximum 3 percent) , bidder has to provide additional plates proportionately, as free issue, assembled into all the applicable PHE's before the Final inspection and "As built Certificate" shall be issued by the bidder accordingly. Bidder to note that negative tolerance beyond three percent shall not be accepted, however no credit shall be given to the bidder for positive tolerance of the plate area measurement.

5.0 PERFORMANCE GUARANTEE AND TESTING:

- 5.1 The PHE shall be guaranteed to meet the performance requirements specified in Section-II and also for trouble free operation after commissioning.
- 5.2 PG test requirements are specified in Datasheet-A. In case of any deficiency, the vendor shall rectify the same at site with no additional cost to BHEL. All duly calibrated instruments required for PG testing including for flow measurements shall be arranged by the bidder and taken back after the test. The computation of flow by characteristics curve of Pumps for PG testing of PHE's shall not be permitted.



TITLE :
**TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS**

SPECIFICATION NO. PE-TS-424-179-N001

SECTION IA

REV. NO. 0 DATE 12.10.17

SHEET 3 OF 3

5.3 It is clarified that pressure gauges and temperature gauges are provided at each PHE inlet / outlet on both primary / secondary sides and bidder can install their calibrated instruments on these locations. It is further clarified that due to layout constraints flow measuring instruments installation on pipe is not feasible. Bidder shall arrange the Ultra-sonic flow meter / similar type of instrument for PG testing.

5.4 At the time of performance testing, cleaning of the plates (if required) and instruments like pressure gauges, temp. Gauges, flow measuring instruments etc. shall be arranged by the bidder and no instruments shall be provided by BHEL for performance testing.

6.0 Documents to be submitted along with the offer:

- Compliance certificate.
- Guarantee Schedule.
- Thermal sizing calculations.
- GA Drg. of PHE indicating all-important details for Layout purpose, withdrawal space required for plates, weight of assembly, nozzle & matching piece details etc.

7.0 Document submission schedule after the award of contract shall be as below:

PACKAGE	BHEL DRG NO	DRG TITLE	Drg Submission schedule
PLATE HEAT EXCHANGERS (PHE)	Primary Documents		
	PE-V5-424-179-N001	Technical Data sheet of PHE	R-0 within 20 days from LOI/PO & subsequent revisions within 10 days of comments received from BHEL.
	PE-V5-424-179-N002	GA drawing of PHE	
	PE-V5-424-179-N003	Thermal sizing calculation of PHE	
	PE-V5-424-179-N005	QAP of PHE	
	Secondary Documents		
	PE-V5-424-179-N004	Performance curves of PHE	R-0 within 20 days of Cat-I(or)II approval on TDS
	PE-V5-424-179-N006	O&M MANUAL for PHE	Within 30 days from MDCC
	PE-V5-424-179-N007	PG Test Procedure for PHE	R-0 within 20 days of Cat-I(or)II approval on PHE Document.

8.0 EXCLUSIONS :

The following are excluded from the bidder's scope:

- Civil foundation works required for installation of the heat exchangers.
- Piping, valves etc., on the external circuit of both primary and secondary water streams.
- Erection & Commissioning of equipment at site.



TITLE :
TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS

SPECIFICATION NO. PE-TS-424-179-N001

SECTION IA APPENDIX 1

REV. NO. 0

DATE 12.10.17

APPENDIX -1

CLAUSE NO.		QUALITY ASSURANCE												एनटीपीसी NTPC	
EQUIPMENT COOLING WATER SYSTEM															
	TEST / CHECKS														
	ITEM / COMPONENTS	Material Test	WPS/PQR/Welder Qualification	DPT/MPI	Assembly Fit Up	Visual & Dimensional Check	UT	RT	Hydraulic / Water Fill	Balancing	Type Test	Performance Test	Other Test		
A	PLATE TYPE HEAT EXCHANGER		Y	Y ³	Y	Y			Y						
A.1	Heat Transfer Plates	Y ¹		Y ²		Y	Y ^{5a}						Y ⁷		
A.2	Gaskets	Y				Y									
A.3	Cover Plates (Front & Rear)	Y ¹				Y	Y ^{5a}								
A.4	Tie Rods	Y ¹		Y ⁴			Y ^{5b}								
B	HORIZONTAL CENTRIFUGAL PUMP				Y	Y						Y ₁₀			
B.1	Casing	Y ¹		Y ⁴		Y			Y						
B.2	Impeller	Y ¹		Y ⁴		Y				Y ⁹					
B.3	Shaft	Y ¹		Y		Y	Y ^{5b}			Y ⁹					
B.4	Fabricated Components	Y ¹	Y	Y ³	Y	Y	Y ^{5a}	Y ⁶	Y ⁸						
NOTES															
1 One per heat / HT batch															
2 DP Test shall be conducted for 10% of the lot of HT plates. However, in case of any defect, entire lot shall be tested and only defect free plates shall be accepted.															
3 100% DP Test shall be conducted on butt welds and 10% DPT on fillet weld after final run.															
4 100% DPT shall be carried out on machined surfaces.															
5a UT shall be done on plates with thickness 25 mm or above.															
5b UT shall be done on shaft / tie rod with diameter 50 mm or above.															
6 RT shall be conducted on butt joints having plate thickness above 10 mm. Quantum of RT shall be based on pressure rating.															
7 After pressing each HT plate shall be subjected to either of the following tests, as per Manufacturer Practice															
a) Light Box Test b) Vacuum Test c) Air Chamber Test															
8 All pressure retaining parts shall be hydrostatically tested at 200% of pump rated head or 150% of shut – off head, whichever is higher, for at least 30 minutes. No leakage is allowed.															
9 Static and Dynamic Balancing shall be carried out on complete rotor assembly.															
10 All pumps shall be tested at rated speed, for head, flow capacity, efficiency and power consumption for the entire operating range i.e. from shut off head to maximum flow. A minimum of 7 readings shall be taken to plot the curve, with one reading at design flow. Testing standard shall be HIS (Hydraulic Institute Standard) of USA.															
Performance test shall be carried out with contract motor, wherever Liquidated Damages are to be ascertained based on performance test at shop.															
11 For Piping & Valves, refer LP Piping System.															
TELANGANA SUPER THERMAL POWER PROJECT PHASE-I (2X800 MW) STEAM GENERATOR ISLAND PACKAGE			TECHNICAL SPECIFICATION SECTION-VI, PART-B BID DOC NO.:CS-9591-101-2					SUB-SECTION – E-11 ECW			Page 1 of 1				



		TECHNICAL SPECIFICATION FOR		Technical specification no		PE-TS-424-179-N001 (Rev 0)		
		PLATE HEAT EXCHANGER		Section		IB		
		DATASHEET - A		Rev		0		
				Date		12.10.17		
	PROJECT		2X800 MW NTPC KARIMNAGAR TELANGANA STPP PHASE-I (SG ISLAND PKG.)					
1.0	General		PHE for SG AUX.					
1.1	Number of Plate Heat Exchanger		Nos	Total Six (6) nos i.e. [2W+1S] for each unit				
1.2	Arrangement		3 x 50% per unit					
1.3	Location		Outdoor					
1.4	Primary side (Hot) Fluid		Passivated DM water (Refer enclosed water analysis)					
1.5	Secondary side (Cold) fluid		Clarified Water (Refer enclosed water analysis)					
1.6	Connecting Pipe size	(Primary Side)	NB	350				
		(Secondary Side)	NB	350				
1.7	Maximum permitted Length of the PHE		mm	Length 5000 mm (excluding reducer)				
2.0	Design							
2.1	Design Code		Latest IS/BS/DIN/ASTM Standards					
2.2	Design Pressure		Kg/cm ² (g)	12				
2.3	Operating Pressure	(Primary Side)	Kg/cm ² (g)	About 8.0-9.0 Kg/sq. cm(g)				
		(Secondary Side)	Kg/cm ² (g)	About 3-3.5 Kg/sq. cm(g)				
2.4	Mechanical Design Temp.		°C	60				
2.5	Heat Transfer per Sq.Mtr. Of Heat Transfer Plate		Kcal/Hr./m ²	6500 (Max.)				
2.6	Minimum Heat Transfer Area		Sq. M.	-				
2.7	Specific Heat of Fluid	(Primary Side)	Cal/gmDeg. C	1.0				
		(Secondary Side)	Cal/gmDeg. C	1.0				
2.8	Density of Fluid	(Primary Side)	gm/cc	1.0				
		(Secondary Side)	gm/cc	1.0				
3.0	Guaranteed Performance Requirements for each Heat Exchangers in fouled condition:							
3.1	Flow rate	(DMCW Side)	M ³ /hr	750				
		(ACW Side)	M ³ /hr	750				
3.2	Inlet temperature	(DMCW Side)	°C	46.8				
		(ACW Side)	°C	36				
3.3	Outlet temp	(DMCW Side)	°C	38				
		(ACW Side)	°C	44.8				
3.4	* Allowable pressure drop across heat exchanger from inlet to outlet in fouled conditions at design flow	(DMCW Side)	MWC	7				
		(ACW Side)	MWC	7				
* High pressure drop than the specified figure will not be accepted, no credit shall however be given for lower pressure drop in bid evaluation. Pressure drop mentioned shall be calculated against flow mentioned at S. No 3.1. of this datasheet. Each heat exchanger shall be capable of passing a flow of at least 1.1 times the design flow rate on both primary and secondary water sides. Bidder shall indicate maximum pressure drop through the heat exchanger under this condition.								
4.0	Additional HT plates on Design Plates		%	NIL				
5.0	Heat Transfer Coefficient/Margin							
5.1	Overall fouling resistance (minimun)		Hr m2deg C/Kcal	0.00008				
5.2	Minimum corrosion allowance on pressure parts,nozzles,sliding channel and frame (refer note 1)		mm	1.6				
6.0	Material of Construction :							
6.1	Heat Transfer Plates (Minimum acceptable plate thickness 0.6 mm). Refer Note no. 3			SS-AISI-316				
6.2	Plate Gasket			Nitrile Rubber				



		TECHNICAL SPECIFICATION FOR PLATE HEAT EXCHANGER		Technical specification no		PE-TS-424-179-N001 (Rev 0)	
		DATASHEET - A		Section		IB	
				Rev		0	
				Date		12.10.17	
PROJECT		2X800 MW NTPC KARIMNAGAR TELANGANA STPP PHASE-I (SG ISLAND PKG.)					
6.3	Compression/Fixed/Frame/Movable Pressure plates	Carbon Steel, IS-2062, E-410, Gr.BR, Epoxy painted					
6.4	Guide Rails/ bar	Carbon Steel, IS-2062, E-410, Gr.BR with SS cladding					
6.5	Support Beam/ column	Carbon Steel, IS-2062, E-410, Gr.BR Epoxy Coated					
6.6	Nozzle (Reducer/Expander)	Carbon Steel, IS-2062, E-410, Gr.BR Epoxy Coated					
6.7	Nozzle flanges	Carbon Steel, IS-2062, E-410, Gr.BR (Confirming to ANSI B 16.5 class, Min.-150 lb) Epoxy Coated					
6.8	Flange/ Counter flanges	Carbon Steel, IS-2062, E-410, Gr.BR (Confirming to ANSI B 16.5 class, Min.-150 lb) Epoxy Coated					
6.9	Tightening Bolts/Rods & Nuts	IS-1367 Gr.8.8 or equivalent					
6.10	Nozzle flange bolt and nut	SA 193 B7/ SA 194 2H					
6.11	Nozzle flange gasket	3mm wire inserted Red Rubber					
6.12	Name Plate	SS- AISI-316					
6.13	Painting						
External Surface							
a.) Surface Preparation		All surface other than stainless steels shall be painted. The steel surface to be applied with painting shall be thoroughly cleaned before applying painting by shotblasting (SA 2.5) etc shall be subjected to BHEL/Customer approval. For all the steel surfaces exposed to (outdoor installation) atmosphere, a coat of chlorinated rubber based zinc phosphate primer of min. thickness DFT of 50 microns followed up with under coat of chlorinated rubber paint of min. thickness DFT of 50 microns shall be applied. Then, intermediate coat consisting of one coat of chlorinated rubber based paint pigmented with Titanium di-oxide with min. thickness DFT of 50 microns and top coat shall consist of two coats each of min. thickness DFT of 50 microns of chlorinated rubber paint shall be provided. Total DFT of paint system shall be min. 200 microns.					
b.) Primer							
c.) Final Paint							
7.0	Extra Carrying capacity to be provided on frame assembly.	%	25				
8.0	Mandatory Spares						
8.01	Gaskets	1 Lot comprising 30% of total requirement of each type & size					
8.02	Fastners	1 Lot comprising 10% of each type					
8.03	Plates	1 Lot comprising 20% of each type					
9.0	Available space (L x W x H)	mm	----- Bidder to indicate -----				
10.0	Weight of Assembly	Kg	----- Bidder to indicate -----				
11.0	Performance Guarantee (PG testing) Demonstration at site	PG test to be demonstrated at site by vendor for all PHEs					
12.0	Hydrotesting at Shop						
12.1	Hydrotesting Pressure	Kg/cm2 (g)	1.5 times the design pressure				
12.2	Duration of Hydrotesting	Minutes	30				
13.0	Performance curves and figures to be furnished during contact stage						
13.1	Primary side water outlet temperature vs. Secondary side water inlet temperature.						
13.2	Primary side water flow (80% to 115%) vs. Pressure drop and outlet temperature (Secondary side flow – 100%)						
13.3	Secondary side water flow (80% to 115%) vs. Secondary side pressure drop and primary side outlet temp (Primary side flow – 100%)						
13.4	Primary side water outlet temperature vs. Primary side inlet temp.						
13.5	Film heat transfer coefficient curve						
13.6	Correction Curves.						
14.0	Minimum Standard requirement of the PHE to be offered by the bidder.						
14.1	Minimum Corrosion allowance on thickness (as per ASME Sec. VIII Div. I) Minimum corrosion allowance for heat exchanger parts of carbon steel material shall be 1.6 mm.						
14.2	Metallurgy specified above is bare minimum . Equivalent or Superior materials suitable for fluid handled is also acceptable subject to Customer/BHEL approval.						
14.3	Plate thickness should be adequate to withstand all operating conditions but not less than Minimum plate thickness of 0.6 mm (No negative tolerance allowed in thickness specified). The plates shall be pressed from one single piece with the corrugation being smooth, uniform and identical for every plate.						
14.4	Heat transfer plates shall be sealed at their outer edges and around the ports by gaskets in order to prevent leakage and inter-mixing of fluids.						
14.5	Double sealing arrangement shall be provided at outer edge and around ports with the inter space between the seals vented to atmosphere in order to avoid inter-mixing of liquids in case of gaskets failure.						
14.6	Each Plate shall be numbered in sequence with the number marked by indelible ink on each plate to permit easy reassembly.						
14.7	Flanges shall be as per ANSI B 16.5 or equivalent. Thickness of pressure and frame plates shall be as per ASME Sect. VIII div.1.						
14.8	Frame of exchanger should be designed so that 25% additional plates can be added in future i.e 25% extra capacity for additional plates shall be provided in frame.						

DM WATER ANALYSIS

Applicable for ALL Projects (PHE-Primary Side)

CLAUSE NO.	PROJECT INFORMATION			
	ANALYSIS OF DM WATER TO BE USED			
	AS			
	PRIMARY FLUID FOR PHEs OF ALL THE PROJECTS			
	S.No.	Characteristics	-	Value
	i)	Silica (Max.)	-	0.02 ppm as SiO2
	ii)	Iron as Fe	-	Nil
	iii)	Total hardness	-	Nil
	iv)	pH value	-	CORRECTED TO 8.5-9.5
	v)	Conductivity excluding the effects of free CO ₂	-	Not more than 0.1
APPLICABLE FOR ALL PROJECTS		TECHNICAL SPECIFICATIONS SECTION-VI PART-A	PROJECT SYNOPSIS	PAGE 1 OF 1

CLAUSE NO.	PROJECT INFORMATION				एनटीपीसी NTPC																																																																			
	SECONDARY SIDE COOLING WATER ANALYSIS <table><tr><th>S.No</th><th>Constituent</th><th>As</th><th>mg/l</th></tr><tr><td>1</td><td>Calcium</td><td>CaCO₃</td><td>104</td></tr><tr><td>2</td><td>Magnesium</td><td>CaCO₃</td><td>88</td></tr><tr><td>3</td><td>Sodium</td><td>CaCO₃</td><td>59</td></tr><tr><td>4</td><td>Potassium</td><td>CaCO₃</td><td>4</td></tr><tr><td></td><td>Total cations</td><td>CaCO₃</td><td>255</td></tr><tr><td>5</td><td>HCO₃</td><td>CaCO₃</td><td>155</td></tr><tr><td>6</td><td>P- Alkalinity</td><td>CaCO₃</td><td>0</td></tr><tr><td>7</td><td>Chloride</td><td>CaCO₃</td><td>54</td></tr><tr><td>8</td><td>Sulphate</td><td>CaCO₃</td><td>46</td></tr><tr><td></td><td>Total Anions</td><td>CaCO₃</td><td>255</td></tr><tr><td>9</td><td>Silica, Reactive</td><td>Si</td><td>5</td></tr><tr><td>10</td><td>Iron (Total)</td><td>Fe</td><td>0.5</td></tr><tr><td>11</td><td>pH</td><td>-</td><td>7.0-7.8</td></tr><tr><td>12</td><td>Turbidity</td><td>NTU</td><td>10</td></tr><tr><td>13</td><td>Total dissolved solids</td><td></td><td>250-300</td></tr><tr><td>14</td><td>Temperature</td><td>Deg C</td><td>20-35</td></tr></table>				S.No	Constituent	As	mg/l	1	Calcium	CaCO ₃	104	2	Magnesium	CaCO ₃	88	3	Sodium	CaCO ₃	59	4	Potassium	CaCO ₃	4		Total cations	CaCO ₃	255	5	HCO ₃	CaCO ₃	155	6	P- Alkalinity	CaCO ₃	0	7	Chloride	CaCO ₃	54	8	Sulphate	CaCO ₃	46		Total Anions	CaCO ₃	255	9	Silica, Reactive	Si	5	10	Iron (Total)	Fe	0.5	11	pH	-	7.0-7.8	12	Turbidity	NTU	10	13	Total dissolved solids		250-300	14	Temperature	Deg C	20-35
S.No	Constituent	As	mg/l																																																																					
1	Calcium	CaCO ₃	104																																																																					
2	Magnesium	CaCO ₃	88																																																																					
3	Sodium	CaCO ₃	59																																																																					
4	Potassium	CaCO ₃	4																																																																					
	Total cations	CaCO ₃	255																																																																					
5	HCO ₃	CaCO ₃	155																																																																					
6	P- Alkalinity	CaCO ₃	0																																																																					
7	Chloride	CaCO ₃	54																																																																					
8	Sulphate	CaCO ₃	46																																																																					
	Total Anions	CaCO ₃	255																																																																					
9	Silica, Reactive	Si	5																																																																					
10	Iron (Total)	Fe	0.5																																																																					
11	pH	-	7.0-7.8																																																																					
12	Turbidity	NTU	10																																																																					
13	Total dissolved solids		250-300																																																																					
14	Temperature	Deg C	20-35																																																																					
TELANGANA SUPER THERMAL POWER PROJECT PHASE-I (2X800 MW) STEAM GENERATOR ISLAND PACKAGE		TECHNICAL SPECIFICATION SECTION – VI, PART-A BID DOC. NO CS-9591-101-2		SUB-SECTION-IB PROJECT INFORMATION	PAGE 8 OF 15																																																																			



TITLE :
TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS

SPECIFICATION NO. PE-TS-424-179-N001

SECTION II

REV. NO. 0 DATE 12.10.17

SECTION II

IIA STANDARD TECHNICAL SPECIFICATION & STANDARD QUALITY PLAN OF PHE

	TITLE :	SPECIFICATION NO. PE-TS-XXX-179-N001
	TECHNICAL SPECIFICATION	
	FOR PLATE HEAT EXCHANGERS	SECTION: IIA
		REV. NO. 0
	SHEET	Page 1 of 8

SECTION: IIA

PLATE HEAT EXCHANGER

STANDARD TECHNICAL SPECIFICATION

	TITLE :	SPECIFICATION NO. PE-TS-XXX-179-N001
	TECHNICAL SPECIFICATION	
	FOR PLATE HEAT EXCHANGERS	SECTION: IIA
		REV. NO. 0
		SHEET Page 2 of 8

1.00.01 GENERAL

This specification covers the Design, Performance requirements, Constructional Features, Materials requirements, manufacture, assembly, Inspection and Testing at Manufacturer's and/ or his subcontractor's works and Painting requirements for delivery of Plate Heat Exchanger complete with all accessories as specified herein-after.

2.00.00 CODES AND STANDARDS:

2.01.00 The design, manufacture and testing of the plate heat exchanger complete with all accessories, shall generally conform to the latest editions of the following appropriate standards.

2.01.01 IS/BS/DIN/US Standards regarding pressure vessels, pressure piping, pipes, valves, flanges and other as necessary.

2.01.02 IS/ BS/ DIN/ ASTM for material specification and testing procedures.

2.02.00 In case of any conflict between the above codes/ standards and this specification, the latter shall prevail and in case of any further conflict in the matter, the interpretation of the specification by the Engineer shall be final and binding

3.00.00 DESIGN AND CONSTRUCTION:

3.01.00 General Requirements:

3.01.01 Unless otherwise necessary, manufacture's standard and proven models of the plate heat exchanger shall be supplied.

3.01.02 The equipment shall be capable of safe, proper and continuous operation at all heat loads and water from up to those corresponding to the operating conditions mentioned in Data Sheet – A furnished a/w project enquiry. Vibration, noise, mechanical and thermal stresses shall be kept

	TITLE :	SPECIFICATION NO. PE-TS-XXX-179-N001
	TECHNICAL SPECIFICATION	
	FOR PLATE HEAT EXCHANGERS	SECTION: IIA
		REV. NO. 0
		SHEET Page 3 of 8

within allowable units specified by relevant codes/ standards in design.
Due attention shall be given to *case of maintenance, repair and cleaning*.

3.01.03 Suitable corrosion allowance shall be provided wherever necessary. The corrosion allowance for the heat exchanger parts such as pressure plates (support plates), nozzles, sliding channels and frame shall be 1.6 mm (minimum).

3.01.04 Each heat exchanger shall be capable of passing a flow of at least 1.1 times the design flow rate on both primary and secondary water sides. Bidder shall indicate maximum pressure drop through the heat exchanger under this condition.

3.01.05 For the purpose of calculating dirty overall heat transfer coefficient, a total fouling factor as given in Data Sheet-A furnished a/w project enquiry shall be assumed. It is expected that the cleaning frequency shall be once in a year with the above fouling factor.

3.01.06 No back wash for the heat exchangers is envisaged.

3.02.00 Performance Requirements:

3.02.01 The pressure drop across plate heat exchanger from inlet to outlet in fouled conditions for primary and secondary sides, shall not be more than those specified in Data Sheet-A furnished a/w project enquiry, for the specified flow rates.

3.02.02 For the specified flow rate and inlet temperature, the primary side (hot fluid) outlet temperature shall not be more than that specified in Data Sheet-A furnished a/w project enquiry.

3.02.03 In the event of failure to meet the above stipulated performance requirements, the equipment will be out rightly rejected.

3.03.00 Construction of Heat Exchanger:

3.03.01 Heat transfer plates shall be packed in a frame consisting of fixed frame plate and movable pressure plate and aligned at top and bottom of carrying bars. Design shall be such that cleaning is possible without dismantling the piping.

	TITLE :	SPECIFICATION NO. PE-TS-XXX-179-N001
	TECHNICAL SPECIFICATION	
	FOR PLATE HEAT EXCHANGERS	SECTION: IIA
		REV. NO. 0
		SHEET Page 4 of 8

- 3.03.02 Heat transfer plates shall be sealed at their outer edges and around the ports by gaskets in order to prevent leakage and inter-mixing of fluids.

Double sealing arrangement shall be provided at outer edge and around ports. The inter space between the seals shall be vented to atmosphere in order to avoid inter-mixing of liquids in case of gaskets failure.

The gasket arrangement shall be such that it receives continuous support to ensure a long gasket life. The gasket should be able to retain their properties and shape over a life period of 10 years.

- 3.03.03 Heat transfer plates shall be provided with sufficient thickness in order to impart sufficient rigidity to the plates particularly from handling considerations. Plates shall have contact points in order to provide inter-plate supports. The recesses on the plates are suitably strengthened by a reinforcement plate.

Plate thickness shall be adequate to withstand all operating conditions as specified in data sheet A furnished a/w project enquiry.. Flanges shall be as per ANSI 16.5 or equivalent. Thickness of pressure and frame plates shall be as per ASME Sect. VIII div.1.25% extra capacity for additional plates shall be provided in frame.

Each Plate shall be numbered in sequence. The number shall be marked by indelible ink on the plate to permit easy reassembly. The plates shall be pressed from one piece. They shall be pressed in single/ progressive manner.

The corrugation shall be smooth, uniform and identical for every plate. The PHE bottom frame plate and support should have fixing lugs and cleats to keep provision for enabling to fit trough with outlet nozzle fitted underneath to collect and drain out water in the event of leakages.

- 3.03.04 Frame for each heat exchanger shall have extra capacity to accommodate the additional plates, if required in future because of any reason whatsoever. The extra capacity to be provided is indicated in Data Sheet-A furnished a/w project enquiry.

The upper carrying bar and lower guide bar shall be rigid in construction

	TITLE :	SPECIFICATION NO. PE-TS-XXX-179-N001
	TECHNICAL SPECIFICATION	
	FOR PLATE HEAT EXCHANGERS	SECTION: IIA
		REV. NO. 0
		SHEET Page 5 of 8

without any risk of sagging or buckling, and shall facilitate easy guiding of the plates.

3.03.05 All inlet, outlet and other nozzles shall be flanged type and shall be as specified in Data Sheet-A. Counter flanges complete with gaskets, bolts, nuts and coatings (wherever necessary) shall be supplied for the nozzle connections. The nozzle sizes of primary/ secondary streams of PHE's shall be of adequate size within acceptable range of velocity. The size selection shall be subject to approval in the event of order.

3.03.06 If necessary, relief valves shall be provided on both the streams.

3.04.00 **Materials of construction:**

Material of the heat transfer plates and gaskets shall be consistent with the fluid handled. However, material specification for various parts shall be equal or superior to those specified in Data Sheet - A furnished a/w project enquiry.

4.00.00 **FOUNDATION AND LIFTING ARRANGEMENTS:**

4.01.00 Plate heat exchanger shall be supplied with necessary foundation plates, anchor bolts, sleeves, nuts, inserts etc.

4.02.00 Plate heat exchanger shall be equipped with suitable lifting lugs/ eyebolts to facilitate handling during erection and maintenance.

5.00.00 **PAINTING:**

5.01.00 The surface preparation of all exterior and interior surfaces of plate heat exchanger shall include the following:

- a) Removal of oil, grease, dirt and swarf etc
- b) Removal of rust and scale etc.,
- c) Sand blasting/ shot blasting.

5.02.00 All exterior surfaces of PHE's shall be sand/ shot blasted, painted with

	TITLE :	SPECIFICATION NO. PE-TS-XXX-179-N001
	TECHNICAL SPECIFICATION	
	FOR PLATE HEAT EXCHANGERS	SECTION: IIA
		REV. NO. 0
		SHEET Page 6 of 8

primer and finish coated with coal tar based epoxy coating of min. 250 microns thickness. Color shade etc. shall be subject to BHEL/ Customer approval.

6.00.00 SHOP INSPECTION AND TESTS:

6.01.00 General:

6.01.01 Manufacturer shall conduct all tests and stage inspections as per the approved quality plan to ensure that the plate heat exchanger shall conform to the requirements of this specification and of the applicable codes/ standards.

6.01.02 All materials used for manufacture/ fabrication of the plate heat exchanger components shall be of tested quality. Relevant test certificates for chemical analysis, mechanical tests and heat treatment shall be made available before the final shop inspection. In case the relevant test certificates are not available, the manufacturer shall arrange to carry out the necessary tests required as per approved quality plan and applicable codes at his cost, for which samples shall be identified by BHEL's representative.

6.01.03 All shop tests shall be conducted in the presence of BHEL's representative and test certificates for the same shall be furnished to BHEL for approval.

6.01.04 Qualification of welding procedures and welders shall be as per ASME B&PV Code, Section-IX/applicable code.

6.02.00 Heat Transfer Plates:

6.02.01 Plate material used for pressing shall be furnished with mill test report showing chemical and physical properties and heat treatment records. Suitable correlating mark shall be available, so that BHEL's inspector can identify the material with test certificates before pressing the plates.

6.02.02 After pressing visual and dimensional checks on the plates shall be made in the presence of BHEL's inspector, on sampling basis.

	TITLE :	SPECIFICATION NO. PE-TS-XXX-179-N001
	TECHNICAL SPECIFICATION	
	FOR PLATE HEAT EXCHANGERS	SECTION: IIA
		REV. NO. 0
		SHEET Page 7 of 8

- 6.02.03 The heat transfer plates from each lot of the plates shall be tested by liquid/ dye penetrant test in order to check for cracks and other surface defects in presence of BHEL/customer's representative/Third party (Llyods, TUV or equivalent). If any defect is detected in any of these plates, the whole lot shall be tested and plates without defects only shall be accepted. Plate cleaning agent, liquid penetrant and developer shall not contain any halogen .Procedure for light box test and DP test shall be submitted to purchaser's approval. For Quantum of check , Refer Section C.
- 6.02.04 The heat transfer plates shall be tested by light box test in order to check for cracks and other surface defects in presence of BHEL/customer's representative/Third party (Lloyds', TUV or equivalent). The plates without defects only shall be accepted. For Quantum of check , Refer Section C.
- 6.03.00 **Gaskets:**
- 6.03.01 Certificate on Chemical composition of the gasket material shall be furnished to prove the quality. Sample testing in presence of BHEL's inspector shall also be conducted, if desired.
- 6.03.02 Shore hardness test shall be conducted on the gasket and certificate shall be furnished. Sample tests shall also be done in presence of BHEL's inspector.
- 6.03.03 Visual and dimensional check on a sampling basis shall be done. Plates and gaskets assembled together will be inspected for proper assembly.
- 6.04.00 **Frame Assembly:**
- 6.04.01 All materials for various components of frame assembly viz. frame plate, pressure plate, carrying bar, guide bar, tightening/ clamping bolts and nuts etc., shall be of tested quality and test certificates for chemical composition and physical properties shall be furnished.
- 6.04.02 If the thickness of the plates used for frame and pressure plates is 40 mm or more the same shall be checked ultrasonically to demonstrate the absence of lamination and lack of fusion etc.
- 6.05.00 All weld joints used for Fabrication of Heat exchangers shall be subjected to suitable non destructive examination. This shall include 100 % magnetic particle examination or other suitable NDT of all welds.

	TITLE :	SPECIFICATION NO. PE-TS-XXX-179-N001
	TECHNICAL SPECIFICATION	
	FOR PLATE HEAT EXCHANGERS	SECTION: IIA
		REV. NO. 0
		SHEET Page 8 of 8

7.00.00 **Document submission:**

7.01.00 The tenderer shall submit during contract stage a curve showing expected DM Water (Primary side) temperature at heat exchanger outlet for each one degree centigrade variation in ACW (Secondary side) temperature, all other parameters remaining unchanged. Similar curve for expected DM Water outlet temperature for variation of ACW flow rate with ACW inlet temperature remaining unaltered shall also be furnished. The bidder shall also furnish various curves to enable, apply corrections during site PG testing in the event of any data variation from the stipulated design parameters.

7.02.00 Bidder shall also furnish thermal design calculations at contract stage to justify the no. of plates offered.

DMS (BHEL-PEM)
6169430-2013/07/04

		STANDARD QUALITY PLAN SHEET 1 OF 5		CUSTOMER:		PROJECT TITLE:		SPECIFICATION NO. : PE-TS-XXX-179-N001						
				BIDDER/VENDOR:		QUALITY PLAN NO.:		SPECIFICATION TITLE : TECHNICAL SPEICIFICATION FOR PLATE HEAT EXCHANGERS SECTION : IIA						
				SYSTEM:		ITEM: PHE								
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK		REFERENC E DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS	
					2/3	1				P	W	V		
1.	2.	3.	4.	5.	6.		7.	8.	9.	D*	**	10.	11.	
1.0 RAW MATERIAL INSPECTION														
1.1	Frame Plates & Pressure Plates, Counter Flanges, Connection Lining Material.Top And Bottom Carrying Bar.	Physical Properties	MA	Physical Test	1/ Heat/He -at Batch	1/ Heat/He-at Batch	App. Drg / Data Sheet	Relevant material spec.	Mill TC Or Lab Test Report	√	2,3	-	1	If co-related mill TCS are not available then check testing carried out by reputed lab
		Chemical Properties	MA	Chemical Analysis	1/ Heat/He -at Batch	1/ Heat/He-at Batch	-do-	-do-	-do-	√	2,3	-	1	-do-
		Dimensions	MA	Measurement	100%	100%	Approved Drawings		Inspection Reports	√	2,3	-	1	
		Workmanship And Finish	MA	Visual	100%	100%	-do-	-do-	-do-		2,3	-	1	
		Lamination (Applicable For Frame And Pressure Plate Only)	CR	Ultrasonic Test	100%	100%	SA 435	SA 435	-do-	√	2,3	-	1	Applicable for plate thickness more than 25 mm only
1.2	Heat Transfer Plates/Coils	Physical Properties	MA	Physical Test	1/ Heat	1/ Heat	App. Drg. / Data Sheet	App. Drg. / Data Sheet	Mill TC Or Lab Test Report	√	2,3	-	1	Co-related mill TCS to be provided. See Remark 1
		Chemical Properties	MA	Chemical Analysis	1/ Heat	1/ Heat	-do-	-do-	-do-	√	2,3	-	1	-do-
		Dimensions	MA	Measurement	100%	Sample	Approved Drawings		Inspection Reports	√	2,3	-	1	
1.3	Gaskets	Dimensions	MA	Measurement	100%	Sample	Approved Drawings		Inspection Reports		2,3	-	1	Co-related mill TCS to be provided.
		Workmanship And Finish	MA	Visual	-do-	-do-	No damage, No Surface defects.		-do-		2,3	-	1	
		Contour	MA	Visual	-do-	-do-	Mfg. Drgs / specification		-do-		2,3	-	1	
		Hardness	CR	Measurement	-do-	-do-	Approved Drawings		-do-	√	2,3	-	1	
				LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (√) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION. ** 1: BHEL 1* SHALL BE CLEARED BY BHEL 2: VENDOR, 3: SUB VENDOR P: PERFORM W: WITNESS AND V: VERIFICATION. AS APPROPRIATE CHP: CUSTOMER SHALL IDENTIFY IN COLUM "N" AS 'W'				Cust. Logo	DOC. NO.:		REV.		CAT.	
MANUFACTURER/ SUB-SUPPLIER		MAIN-SUPPLIER		SIGNATURE		FOR CUST. USE								
									REVIEWED BY	APPROVED BY	APPROVAL SEAL			

		STANDARD QUALITY PLAN SHEET 2 OF 5		CUSTOMER:		PROJECT TITLE:		SPECIFICATION NO. : PE-TS-XXX-179-N001						
				BIDDER/VENDOR:		QUALITY PLAN NO.:		SPECIFICATION TITLE : TECHNICAL SPEICIFICATION FOR PLATE HEAT EXCHANGERS SECTION : IIA						
				SYSTEM:		ITEM: PHE								
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK		REFERENC E DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS	
					2/3	1				P	W	V		
1.	2.	3.	4.	5.	6.		7.	8.	9.	D*	**	10.	11.	
1.4	Tightening Bolts & Nuts. (Tie Rod)	Physical Properties	MA	Physical Test	1/ Heat	1/ Heat	App. Drg / data sheet	Relevant Material Spec.	Mill Tc Or Lab Test Report	√	2,3	-	1	Manufacturer test certificate will be submitted for review.
		Chemical Properties	MA	Chemical Analysis	1/ Heat	1/ Heat	-do-	-do-	-do-	√	2,3	-	1	-do-
		Dimensions	MA	Measurement	100%	100%	Approved Drawings		IR	√	2,3	-	1	
		Workmanship and Finish	MA	Visual	100%	100%	-do-	-do-	-do-		2,3	-	1	
		Internal Soundness (For diameter >= 40 mm)	CR	UT	100%	100%	ASTM A 388	See Remark - 3	-do-	√	2,3	-	1	UT will be carried on raw material stage.
2.0	IN PROCESS INSPECTION													
2.1	HT PLATES	Area Measurement	MA	White Light Scanning	1 per Type	1 per Type	Approved drawing/ data sheet	Approved drawing/ data sheet	IR	√	2,3	1	-	See Remark 2
		Physical Properties	MA	Physical Test	1 Sample per Heat	1 Sample per Heat	Approved drawing/ data sheet	Relevant Material Spec.	Mill TC or Lab Test Report	√	2,3	-	1	Manufacturing test certificates will be submitted for review.
		Chemical Properties	MA	Chemical Analysis	1 Sample per Heat	1 Sample per Heat	Approved/ drawing/ data sheet	Relevant Material Spec.	Mill TC or Lab Test Report	√	2,3	-	1	Manufacturing test certificates will be submitted for review.
		Dimension	MA	Measurement	1 Sample per Heat	1 Sample per Heat	Approved drawing/ data sheet	Approved drawing/ data sheet	Inspection Report	√	2,3	-	1	
		Workmanship And Finish	MA	Visual	100%	100%	Approved drawing/ data sheet	No scratches, cracks etc.	-do-		2,3	-	1	

		LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (√) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION. ** 1: BHEL 1* SHALL BE CLEARED BY BHEL 2: VENDOR, 3: SUB VENDOR P: PERFORM W: WITNESS AND V: VERIFICATION. AS APPROPRIATE CHP: CUSTOMER SHALL IDENTIFY IN COLUM "N" AS ' W"	Cust. Logo FOR CUST. USE	DOC. NO.:		REV.		CAT.-
MANUFACTURER/ SUB-SUPPLIER				MAIN-SUPPLIER				
SIGNATURE					REVIEWED BY	APPROVED BY	APPROVAL SEAL	

		STANDARD QUALITY PLAN SHEET 3 OF 5		CUSTOMER:		PROJECT TITLE:		SPECIFICATION NO. : PE-TS-XXX-179-N001						
				BIDDER/VENDOR:		QUALITY PLAN NO.:		SPECIFICATION TITLE : TECHNICAL SPECIFICATION FOR PLATE HEAT EXCHANGERS SECTION : IIA						
				SYSTEM:		ITEM: PHE								
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK		REFERENC E DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS	
					2/3	1				P	W	V		
1.	2.	3.	4.	5.	6.		7.	8.	9.	D*	**	10.	11.	
		Surface Defects And Cracks	CR	DP test	10%	2 % or min. 100 nos. whichever is higher	Manufacturer's DP test procedure (to be reviewed and approved by BHEL/Customer during contract stage)		DPT Report	√	2,3	1	-	See Remark 3
				Light Box Test/ Vacuum chamber test	100%	10%	Manufacturer's Light Box/Vacuum test procedure (to be reviewed and approved by BHEL/Customer during contract stage)		Vacuum Test Report	√	2,3	1	-	See Remark 3
		PMI testing	CR	PMI test	100 %	1 Sample per Heat	Approved drawing/ data sheet		PMI Compliance report	√	2,3	-	1	See Remark 5
2.2	Welding Procedures Specification (WPS)	Correctness	MA	Verification	100%	100%	ASME SEC-IX.	ASME SEC-IX.	QW 482 ASME SEC-IX	√	2,3	-	1	Customer /BHEL/ TPI (NPCIL, EIL, LLYODS & BVIS) approved WPS shall be used for welding
2.3	Procedure Qualification Records (PQR)	Suitability	MA	Visual & Mechanical Test	100%	100%	-do-	-do-	QW 483 ASME SEC-IX.	√	2,3	-	1	
2.4	Welders Performance Qualification	Welder's Performance Soundness Of Welds	MA	Visual / RT & Mechanical	100%	100%	-do-	-do-	QW 484 ASME SEC-IX	√	2,3	-	1	Only customer / BHEL/ TPI (NPCIL, EIL, LLYODS & BVIS) approved welder shall be engaged for welding.

		LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (√) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION. ** 1: BHEL 1* SHALL BE CLEARED BY BHEL 2: VENDOR, 3: SUB VENDOR P: PERFORM W: WITNESS AND V: VERIFICATION. AS APPROPRIATE CHP: CUSTOMER SHALL IDENTIFY IN COLUM "N" AS 'W'	Cust. Logo FOR CUST. USE	DOC. NO.:		REV.	CAT.
MANUFACTURER/ SUB-SUPPLIER	MAIN-SUPPLIER	SIGNATURE		REVIEWED BY		APPROVED BY	APPROVAL SEAL

		STANDARD QUALITY PLAN SHEET 4 OF 5		CUSTOMER:		PROJECT TITLE:		SPECIFICATION NO. : PE-TS-XXX-179-N001						
				BIDDER/VENDOR:		QUALITY PLAN NO.:		SPECIFICATION TITLE : TECHNICAL SPECIFICATION FOR PLATE HEAT EXCHANGERS SECTION : IIA						
				SYSTEM:		ITEM: PHE								
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK		REFERENC E DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS	
					2/3	1				P	W	V		
1.	2.	3.	4.	5.	6.		7.	8.	9.	D*	** 10.			11.
2.5	Weld joint of expander/reducer.	Welding Of Outer Flange To Reducer/Expander	MA	Visual	100%	100%	Approved Drawings		Inspection Report	√	2,3	-	1	
				DPT	100%	100%	Manufacturer's DP test procedure (to be reviewed and approved by BHEL/Customer during contract stage)		DPT Report	√	2,3	1	-	
2.6	PHE Structure	Workmanship and finish	MA	Measurement & Visual	100%	100%	Approved Drawings		Inspection Report	√	-	2	1	
2.7	Plate Gaskets	Presence Of Gasket	MA	Visual	100%	100%	Mfg. Spec.	Mfg. Spec.	-do-	√	2	1	-	
2.8	Plate arrangement to flow diagram	Correctness	CR	Visual as per flow diagram	100%	100%	Approved Drawing		Inspection Report		2	-	1	
2.9	Assembly of tightening bolts and nuts	Squeezing of threads on T/B	MA	Visual	100%	100%	Approved Drawing / Data sheet		-do-		2	-	1	
2.10	Plate Pack	Length	MA	Dimension Measurement	100%	100%	Approved Drawing		-do-		2	-	1	
3.0	FINAL INSPECTION													
3.1	Complete Assembly	a. Conformance to GA drg.	MA	-do-	100%	100%	-do-	-do-	-do-		2	1	-	CHP
		B. Dimensions, No. of Heat Transfer Plates, Workmanship & finish	MA	-do-	100%	100%	-do-	-do-	-do-	√	2	1	-	CHP
3.2	Unbalanced hydrostatic pressure (Primary Side)	Leakage / strength of structure	MA	Hyd. Test	100%	100%	Manufacturer's Hydro test procedure (to be reviewed and approved by BHEL/Customer during contract stage)		Hydro Test Report	√	2	1	-	CHP; Hydro test @ 1.5 times the design pressure with 60 minutes holding time.

MANUFACTURER/ SUB-SUPPLIER		MAIN-SUPPLIER		LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (√) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION. ** 1: BHEL 1* SHALL BE CLEARED BY BHEL 2: VENDOR, 3: SUB VENDOR P: PERFORM W: WITNESS AND V: VERIFICATION. AS APPROPRIATE CHP: CUSTOMER SHALL IDENTIFY IN COLUMN "N" AS 'W'		Cust. Logo FOR CUST. USE		DOC. NO.:		REV.		CAT.	
								REVIEWED BY		APPROVED BY		APPROVAL SEAL	
SIGNATURE													

		STANDARD QUALITY PLAN SHEET 5 OF 5		CUSTOMER:		PROJECT TITLE:		SPECIFICATION NO. : PE-TS-XXX-179-N001					
				BIDDER/VENDOR:		QUALITY PLAN NO.:		SPECIFICATION TITLE : TECHNICAL SPECIFICATION FOR PLATE HEAT EXCHANGERS SECTION : IIA					
				SYSTEM:		ITEM: PHE							
SL. NO	COMPONENT & OPERATIONS	CHARACTERISTICS	CAT	TYPE/ METHOD OF CHECK	EXTENT OF CHECK		REFERENC E DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			REMARKS
					2/3	1				P	W	V	
1.	2.	3.	4.	5.	6.		7.	8.	9.	D*	**	10.	11.
3.3	Unbalanced hydrostatic pressure (Secondary Side)	Leakage / strength of structure	MA	Hyd. Test	100%	100%	-do-	-do-	√	2	1	-	CHP; Hydro test @ 1.5 times the design pressure with 60 minutes holding time.
3.4	Completeness of all previous tests	Completeness	MA	Verification of reports	100%	100%	Tech. Specs / App. Drawings	Completion Certificate	√	2	-	1	
3.5	Painting	Dry film thickness & shade	MA	Measurement & visual	100%	100%	Customer/BHEL Tech. Spec. / Approved Data sheets	-do-	√	2	-	1	
3.6	Packing	Completeness	MA	Measurement & visual	100%	100%	Customer/BHEL Tech. Spec. / Approved Data sheets	-do-	√	2	-	1	Packing procedure as per Annexure B.
REMARKS:- 1. Original Mill TC's to be furnished by vendor to BHEL representative during inspection stage. BHEL to verify physical correlation of Mill TC's with material. 2. Inspection of Heat Transfer Plate Area Measurement shall be by White Light Scanning Method from BHEL(Refer Annexure –A). In case, inspection of plate area measurement by white light scanning method of specific PHE model has been witnessed by BHEL in past project then Type test certificates are acceptable to BHEL for same. 3. Reg. Dye Penetrant Test & Light Box Test: There shall be random witness by BHEL/ NTPC at Bidder's works, in case any defect is found in any of selected % of plates, the whole lot shall be tested in presence of BHEL & Customer. H.T. Plates without defect only shall only be accepted. 4. Ultrasonic test of tie rods shall be carried out using 10 mm / 20 mm size Normal Beam Probe of frequency 2 MHz. Using this probe the back wall echo in the sound area of bar shall be adjusted to 100% of full Screen Height (FSH). The whole bar shall be scanned under this sensitivity setting. In this sensitivity setting any defect echo indication having height greater than 20% of FSH is not acceptable. 5. 100% PMI Inspection for material grade of PHE Heat Transfer plates shall be from third party like TUV/Lloyd & certificate shall be submitted for review of BHEL. BHEL reserves the right to conduct random & independent PMI inspection on PHE's Heat Transfer plates to ascertain the plate material.													

		LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION. ** 1: BHEL 1* SHALL BE CLEARED BY BHEL 2: VENDOR, 3: SUB VENDOR P: PERFORM W: WITNESS AND V: VERIFICATION. AS APPROPRIATE CHP: CUSTOMER SHALL IDENTIFY IN COLUM "N" AS 'W'	Cust. Logo FOR CUST. USE	DOC. NO.:		REV.	CAT.
MANUFACTURER/ SUB-SUPPLIER							
SIGNATURE				REVIEWED BY		APPROVED BY	APPROVAL SEAL



TITLE :
TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS

SPECIFICATION NO. PE-TS-424-179-N001

SECTION IIA

REV. NO. 0 DATE 12.10.17

SHEET 1 OF 2

Annexure-A to Standard Quality Plan

**PROCEDURE FOR MEASUREMENT OF HEAT TRANSFER SURFACE AREA OF
THE PHE PLATES**

Definition of Heat transfer area:-

The Heat transfer area of the PHE plate is the area of the plate participating in the heat transfer process viz. the wetted surface area inside the gasketed groove of the plate as shown in the **Annexure 1**.

Steps to Measure the Heat transfer Area:

- 1) The surface area of the plate shall be cleaned thoroughly.
- 2) Apply the developer (as used in Dye Penetrant test) over the entire surface area of the plate.
- 3) Fix the reference stickers at several appropriate locations on the plate.
- 4) White light (CFL) is projected on the plate.
- 5) The entire surface area including all the geometrical features of the plate (corrugations) is captured by the 3D camera.
- 6) The 3D image of the plate is then converted into CAD format.
- 7) The surface area can be measured from the 3D CAD drawing.



TITLE :
TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS

SPECIFICATION NO. PE-TS-424-179-N001

SECTION IIA

REV. NO. 0

DATE 12.10.17

SHEET 2 OF 2

ANNEXURE-1

Heat transfer area to be measured-Shown in Hatched portion below

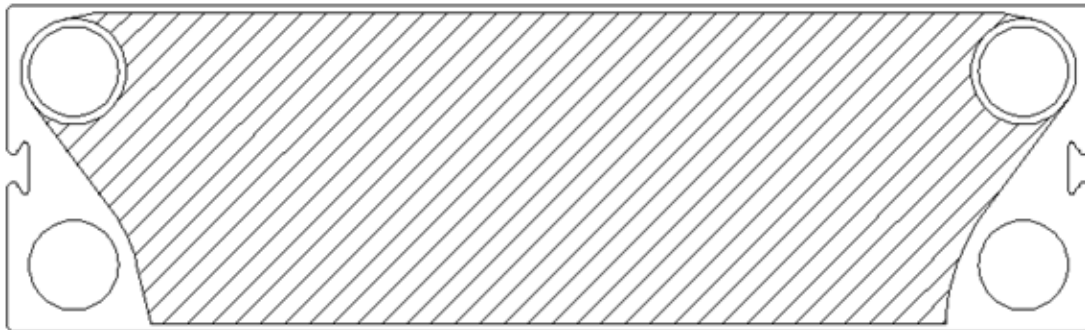


Fig. 1: Wetted Surface Area for Parallel Connection

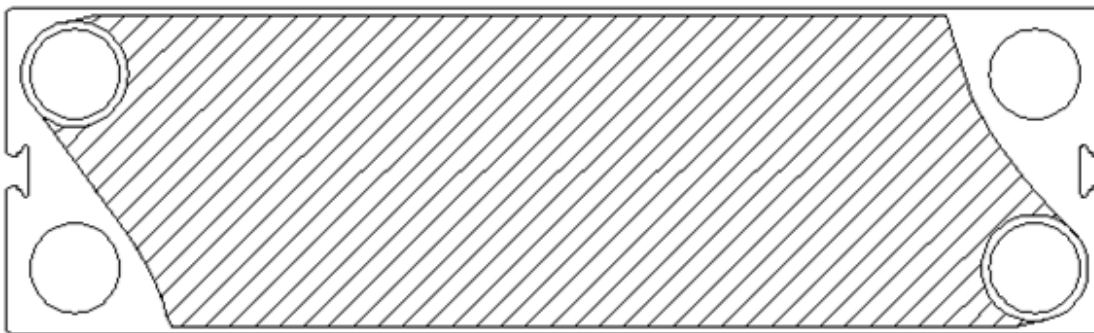


Fig. 2: Wetted Surface Area for Diagonal Connection



TITLE :
**TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS**

SPECIFICATION NO. PE-TS-424-179-N001

SECTION IIA

REV. NO. 0 DATE 12.10.17

SHEET 1 OF 2

Annexure-B to Standard Quality Plan

PHE packing procedure before dispatch

1. Purpose:

The purpose of this procedure is to outline the requirements and procedures for protecting the equipment's during shipment and preserving during the storage.

2. Preparation for Packing:

- After hydro testing, operation, all fluids e.g. water etc., shall be completely drained from all PHE's, and the equipment blown dry.
- All material shall be cleaned internally and externally to remove, scale, rust fillings and any other foreign material.
- The PHE shall be placed on a strong wooden base & bolted to the wooden base using the foundation holes for further transportation upto site.

3. Protection of parts:

- Plate Heat Exchangers shall be packed in proper sizes of wooden cases. High grade woods like Rubber woods, jungle wood, hard wood, mango wood, pine wood, etc. is used for packing.
- All finished (or) machined (External C.S. Surfaces shall be protected against corrosion with corrosion resisting coating, which is easily removable (Compound shall be such that it will remain on the surface at temperature normally encountered during shipping & storage).
- All machined surfaces shall be protected from mechanical damage. All external unfinished carbon steel surfaces shall be sand blasted & shall be coated with rust preventive primer.
- Flanged opening if any shall be covered with blank flanges sealed with blank gasket of natural rubber or equivalent. Butt welded opening shall be closed with temporary closing covers. Internal threads shall be protected with metal plug sealed with Teflon tape (if applicable). External thread shall be protected with PVC sleeve.
- Wooden cases shall be covered with HDPE cloth from inside wooden box and the top. All the opening in plate heat exchanger shall be closed properly by suitably covering to prevent foreign material entering in plate heat exchanger.
- Loose material, primary and secondary a shall be packed in corrugated box and plastic bags with proper tagging.
- All fabricated wooden cases & crates conform to the requirement as per table given below:

Gross Weight [Kgs.]	Board Thickness	Batton / Rafter Thickness
2000 to 9000	Min. 30 mm	Min. 35 mm



TITLE :
**TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS**

SPECIFICATION NO. PE-TS-424-179-N001

SECTION IIA

REV. NO. 0 **DATE 12.10.17**

SHEET 2 OF 2

9000 to 18000

Min. 50 mm

Min. 35 mm

- All the equipment shall be protected for entire period of dispatch, storage and erection against corrosion, incidental damage due to vermin, sunlight, rain, high temperature, humid atmosphere, rough handling in transit and storage. All MS parts which are not painted shall be provided with coating of grease.
- Clay Desiccant or such other moisture absorbing material in small cotton bags shall be placed and tied at various points on the equipment, wherever necessary.

4. Special tools and Spare parts:

Special tools and tackles and spares shall be packed separately with adequate identification. Such packages shall be identified as Tools/Commissioning/Operational spares.

5. Preservation

The equipment's shall be stored under closed/open space in packed condition until installation. The packages containing loose plates and gaskets are to be protected from extreme climatic conditions.





TITLE :
TECHNICAL SPECIFICATION FOR
PLATE HEAT EXCHANGERS

SPECIFICATION NO. PE-TS-424-179-N001

SECTION III

REV. NO. 0

DATE 12.10.17

SECTION III

IIIA COMPLIANCE CERTIFICATE (TO BE SUBMITTED BY BIDDER DURING TENDER STAGE).

IIIB GUARANTEE SCHEDULE (TO BE SUBMITTED BY BIDDER DURING TENDER STAGE).

IIIC DATASHEET -B FORMAT (TO BE SUBMITTED BY SUCCESSFUL BIDDER AFTER AWARD OF CONTRACT).

	TITLE : TECHNICAL SPECIFICATION FOR PLATE HEAT EXCHANGERS PROJECT: 2X800 MW NTPC KARIMNAGAR TELANGANA STPP PHASE-I (SG ISLAND PKG.)	SPECIFICATION NO. PE-TS-424-179-N001	
		SECTION IIIA	
		REV. NO. 0	DATE 12.10.17

COMPLIANCE CERTIFICATE

The bidder shall confirm compliance with following by signing/ stamping this compliance certificate and furnishing same with the offer

- a.) The scope of supply, technical details, construction features, design parameters etc. shall be as per technical specification & there are no exclusions/ deviations with regard to same.
- b.) QP/ test procedures shall be submitted in the event of order based on the guidelines given in the specification & QP enclosed therein.
QP will be subject to BHEL/Customer approval in the event of order & customer hold points for inspection/ testing shall be marked in the QP at the contract stage. Inspection/ testing shall be witnessed as per same apart from review of various test certificates/ Inspection records etc.
The charges for 3rd party inspection (Lloyds, TUV or equivalent) for imported components shall be included in the base price of the equipment by the bidder.
- c.) All drawings/data – sheets etc. to be submitted during contract shall be subject to BHEL/Customer review/ approval.
GA drawings, as submitted with offer at tender stage are for reference purpose only and shall be subject to approval during contract stage.
- d.) There are no other deviations with respect to specification other than those furnished in the 'Schedule of Deviations'
- e.) The offered materials shall be either equivalent or superior to those specified. Also for components where material is not specified it shall be suitable for intended duty, materials shall be subject to approval in the event of order.
- f.) The commissioning spares (if any) are supplied on 'As Required Basis' & prices for same included in the base price (If bidders reply to this is "No commissioning spares are required" and if some spares are actually required during commissioning same shall be supplied by bidder without any cost to BHEL).
- g.) All sub vendors shall be subject to BHEL/CUSTOMER approval.
- h.) Any special tools & tackles, if required, shall be in bidder's scope.
- i.) Performance Guarantees for PHE's shall stand valid as per commercial terms and conditions.
- j.) Regarding bidder's association with their respective Principals (Plate & Gasket supplier) bidder confirms the following:
 - i. Plate supplier shall vet the thermal design of PHE at tender and contract stage and certify the adequacy of design and no of plates.
 - ii. Guarantee schedule duly vetted by Principal shall be submitted during contract stage.
 - iii. Bidders have back to back arrangement with their principal for technical guarantees.

	SCHEDULE OF PERFORMANCE GUARANTEES		SPECIFICATION NO.	PE-TS-424-179-N001
			Section	IIIB
	PLATE HEAT EXCHANGER-SG		Rev No.	0
SL. NO.	DESCRIPTION	UNIT	GUARANTEE VALUE	
			2X800 MW NTPC KARIMNAGAR TELANGANA STPP PHASE-I (SG ISLAND PKG.)	
1.0	PRIMARY SIDE (HOT WATER SIDE)			
	CLEAN CONDITION			
a)	Flow rate	M ³ /Hr.		
b)	DMCW inlet temperature	°C		
c)	DMCW outlet temperature	°C		
d)	Pressure drop	MWC		
2.0	SECONDARY SIDE (COLD WATER SIDE)			
	CLEAN CONDITION			
a)	Flow rate	M ³ /Hr.		
b)	ACW inlet temperature	°C		
c)	ACW outlet temperature	°C		
d)	Pressure drop	MWC		
3.0	PRIMARY SIDE (HOT WATER SIDE)			
	FOULED CONDITION			
a)	Flow rate	M ³ /Hr.		
b)	DMCW inlet temperature	°C		
c)	DMCW outlet temperature	°C		
d)	Pressure drop	MWC		
4.0	SECONDARY SIDE (COLD WATER SIDE)			
	FOULED CONDITION			
a)	Flow rate	M ³ /Hr.		
b)	ACW inlet temperature	°C		
c)	ACW outlet temperature	°C		
d)	Pressure drop	MWC		
PARTICULARS OF BIDDER/ AUTHORISED REPRESENTATIVE				
NAME				
SIGNATURE				
DATE				

	Title DATA SHEET - B PLATE HEAT EXCHANGER	SPECIFICATION NO. PE-TS-XXX-179-N001 SECTION IIIC SHEET 1 OF 7
--	--	---

INSTRUCTION TO BIDDER

1. This data sheet shall be read in conjunction with Specification No. PE-TS-XXX-179-N001 Section- IA & IB.
2. Items which deviate from Specification shall be marked with an asterisk (*)

SL.NO.	ITEM	UNIT	PARTICULARS	
1.0	General			
1.1	Number of plate heat exchangers being supplied.	Nos.		
1.2	Manufacturer			
1.3	Model Number/ Type			
1.4	Whether single or double pass			
1.5	Flow Pattern			
2.0	Design			
2.1	Design Pressure	bar (g)		
2.2	Design Temperature	°C		
2.3	Heat Load(without LMTD correction)	KW		
2.4	Heat Load(with LMTD correction)	KW		
2.5	LMTD (Corrected)	°C		
3.0	Guaranteed Performance for Each Heat Exchanger		Primary Side Secondary Side (Hot Fluid) (Cold Fluid)	
3.1	Flow rate	M ³ /hr		
3.2	Inlet temperature	°C		
3.3	Outlet temperature	°C		
	a) In fouled conditions b) In clean conditions			
3.4	Total pressure drop across heat exchanger from inlet to outlet(including inlet & outlet nozzles) a) For design flow b) For 110% design flow rate	bar		

Name of Bidder/ Vendor					
Revision Number	0	1	2	3	4
Signature of Bidder/ Vendor Authorised Representative					
Date :					

	Title DATA SHEET - B PLATE HEAT EXCHANGER	SPECIFICATION NO. PE-TS-XXX-179-N001 SECTION IIIC SHEET 2 OF 7
---	--	---

INSTRUCTION TO BIDDER

1. This data sheet shall be read in conjunction with Specification No. PE-TS-XXX-179-N001 Section- IA & IB.
2. Items which deviate from Specification shall be marked with an asterisk (*)

SL.NO.	ITEM	UNIT	PARTICULARS	
4.0	Heat Transfer & Fluid flow data		Primary Side (Hot Fluid)	Secondary Side (Cold Fluid)
4.1	Film heat transfer co-efficient	KCal/hrM ² °C		
4.2	Fouling factor	M ² hr°C/KCal		
4.3	Overall fouling	M ² hr°C/KCal		
4.4	Overall heat transfer coefficient	KCal/hrM ² °C		
	a) In clean conditions b) In fouled conditions			
4.5	Total effective heat transfer area per heat exchanger	M ²		
4.6	Average velocity	m/s		
	a) Through ports b) Through Plate Channels			
4.7	Pressure drop in ports	bar		
	a) In Clean Condition b) In fouled conditions			
4.8	Pressure drop in channels	bar		
	a) In Clean Condition b) In fouled conditions			
4.9	Maximum differential pressure between hot and cold fluids in plate channels (operating)	bar (g)		

Name of

Bidder/ Vendor

Revision Number	0	1	2	3	4
Signature of Bidder/ Vendor Authorised Representative					
Date :					

	Title	DATA SHEET - B	SPECIFICATION NO. PE-TS-XXX-179-N001		
		PLATE HEAT EXCHANGER	SECTION IIIC		
			SHEET 3 OF 7		

INSTRUCTION TO BIDDER

1. This data sheet shall be read in conjunction with Specification No. PE-TS-XXX-179-N001 Section- IA & IB.
2. Items which deviate from Specification shall be marked with an asterisk (*)

SL.NO.	ITEM	UNIT	PARTICULARS
5.0	Heat Transfer Plates		
5.1	Area of each plate	M ²	
5.2	Dimension (width x height)	mm x mm	
5.3	Thickness	mm	
5.4	Material & chemical composition		
5.5	Number of plates per heat exchanger	Nos.	
5.6	Maximum number of plates that can be accommodated in the heat exchanger frame	Nos.	
5.7	Type of corrugation		
5.8	Minimum plate pack length	mm	
	a) As per 5.5 above		
	b) As per 5.6 above		
	Maximum plate pack length	mm	
	a) As per 5.5 above		
	b) As per 5.6 above		
5.9	Average spacing between two plates	mm	
5.10	Hold up volume of each passage	M ³	
5.11	Port size (diameter)	mm	
6.0	Plate Gaskets		
6.1	Type		
6.2	Material and composition		
6.3	Thickness of gasket	mm	
6.4	Hardness of gasket		
6.5	Expected life of gasket		

Name of

Bidder/ Vendor

Revision Number	0	1	2	3	4
Signature of Bidder/ Vendor Authorised Representative					
Date :					

	Title	DATA SHEET - B	SPECIFICATION NO. PE-TS-XXX-179-N001
		PLATE HEAT EXCHANGER	SECTION IIIC
			SHEET 4 OF 7

INSTRUCTION TO BIDDER

1. This data sheet shall be read in conjunction with Specification No. PE-TS-XXX-179-N001 Section- IA & IB.
2. Items which deviate from Specification shall be marked with an asterisk (*)

SL.NO.	ITEM	UNIT	PARTICULARS
7.0	Carrying Bar		
7.1	Type of construction		
7.2	Number per heat exchanger		
7.3	Size		
7.4	Material		
8.0	Guide Bar		
8.1	Type of construction		
8.2	Number per heat exchanger		
8.3	Size		
8.4	Material		
9.0	Frame Plate		
9.1	Type of Construction		
9.2	Material		
10.0	Pressure Plate		
10.1	Type of construction		
10.2	Material		
11.0	Supporting Columns		
11.1	Type of Construction		
11.2	Material		
12.0	Clamping/Gasket Compression Arrangement		
12.1	Type of arrangement		
12.2	Tie Rod size & material (Length to take care 25% extra plates)		
12.3	Tie Rod Nuts size & material		
12.4	Nozzle flange stud size & material		
12.5	Nozzle flange Nut size & material		

Name of

Bidder/ Vendor

Revision Number	0	1	2	3	4
Signature of Bidder/ Vendor Authorised Representative					
Date :					

	Title DATA SHEET - B PLATE HEAT EXCHANGER	SPECIFICATION NO. PE-TS-XXX-179-N001 SECTION IIIC SHEET 5 OF 7
---	--	---

INSTRUCTION TO BIDDER

1. This data sheet shall be read in conjunction with Specification No. PE-TS-XXX-179-N001 Section- IA & IB.
2. Items which deviate from Specification shall be marked with an asterisk (*)

SL.NO.	ITEM	UNIT	PARTICULARS	
13.0	Inlet & outlet Connection Nozzles		Primary Side	Secondary Side
13.1	Size	mm	<u>(Hot Fluid)</u>	<u>(Cold Fluid)</u>
13.2	Rating			
13.3	Facing & drilling standard			
13.4	Flange material			
13.5	Are all nozzles counter-flanges, bolts, nuts, gaskets etc., are included in the offer?			YES/NO
14.0	Recommended Cleaning frequency of the heat exchanger for assumed fouling factor	Months		
15.0	Is backwash necessary			YES/NO
16.0	Are all auxiliaries and accessories included in the offer			YES/NO
17.0	Are all counter-flanges with nuts, bolts and gaskets for all terminal points included in the offer?			YES/ NO
18.0	Are all heat exchangers supplied with necessary foundation plates, anchor, bolts, sleeves, inserts, lifting lugs etc., as specified.			YES/ NO

Name of Bidder/ Vendor

Revision Number	0	1	2	3	4
Signature of Bidder/ Vendor Authorised Representative					
Date :					

	Title DATA SHEET - B PLATE HEAT EXCHANGER	SPECIFICATION NO. PE-TS-XXX-179-N001 SECTION IIIC SHEET 6 OF 7
--	--	---

INSTRUCTION TO BIDDER

1. This data sheet shall be read in conjunction with Specification No. PE-TS-XXX-179-N001 Section- IA & IB.
2. Items which deviate from Specification shall be marked with an asterisk (*)

SL.NO.	ITEM	UNIT	PARTICULARS
19.0	Shop Tests & Inspection		
19.1	Whether all the tests and inspections as detailed in the specification/ quality plan are carried out		YES/ NO
19.2	Hydrostatic Test :		
	a) Test Pressure	bar (g)	
	b) Test duration	min.	
19.3	Are all plates checked for cracks and other defects by the penetration method? If not, what percentage is checked?		YES/NO
19.4	Is hardness test conducted for plate gaskets?		YES/NO
20.0	Details of Painting		
20.1	Exterior surface		
	a) Surface preparation		
	b) Primer		
	c) Finish Preparation		
20.2	Interior Surface		
	a) Surface preparation		
	b) Primer		
	c) Finish Preparation		
21.0	Weight of each heat exchanger	kg.	

Name of
Bidder/ Vendor

Revision Number	0	1	2	3	4
Signature of Bidder/ Vendor Authorised Representative					
Date :					

	Title DATA SHEET - B PLATE HEAT EXCHANGER	SPECIFICATION NO. PE-TS-XXX-179-N001 SECTION IIIC SHEET 7 OF 7
---	--	---

INSTRUCTION TO BIDDER

1. This data sheet shall be read in conjunction with Specification No. PE-TS-XXX-179-N001 Section- IA & IB.
2. Items which deviate from Specification shall be marked with an asterisk (*)

SL.NO.	ITEM	UNIT	PARTICULARS
	a) Empty b) Flooded		
22.0	Flooded Weight of heat exchanger with Max. Plates Overall dimensions - (Length x Breadth x Height)	mm x mm x mm	
23.0	withdrawal space		
24.0	Recommended Maintenance tools and tackles furnished		Yes/No
25.0	Mesh Size of recommended Strainer	mm	
26.0	Foundation nuts and bolts supplied		Yes/No
27.0	Other information (if any)		

Name of

Bidder/ Vendor

Revision Number	0	1	2	3	4
Signature of Bidder/ Vendor Authorised Representative					
Date :					