

NTPC
3 x 660 MW NORTH KARANPURA STPP

VOLUME – II

TECHNICAL SPECIFICATION FOR
OIL FILLED SERVICE TRANSFORMERS

SPECIFICATION NO : PE-TS-405-302-E001B
REV-0



BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT
NOIDA, UTTAR PRADESH, INDIA – 201301



**TECHNICAL SPECIFICATION FOR
OIL FILLED SERVICE TRANSFORMERS**

**3 X 660 MW NORTH KARANPURA
STPP**

SPECIFICATION NO. PE-TS-405-302-E001B

VOLUME II

CONTENTS SHEET

REVISION 0 | DATE: 14.01.2020

SHEET 1 OF 1

CONTENTS

<u>S. NO.</u>	<u>CONTENTS</u>	<u>NO. OF SHEETS</u>
01	SPECIFICATION NO	01
02	CONTENTS	01
03	COMPLIANCE CERTIFICATE	01
04	INSULATION LEVEL	01
05	SECTION - 'I'	41
	SPECIFIC TECHNICAL REQUIREMENT	(10)
	ANNEXURE-I (DOCUMENTS REQUIRED ALONG WITH TECHNICAL OFFER)	(01)
	DATA SHEET-A	(03)
	DATA SHEET-B	(01)
	DATA SHEET-C	(10)
	QUALITY ASSURANCE	(01)
	ANNEXURE -II (STANDARD QUALITY PLAN)	(09)
	ANNEXURE -III (DOCUMENTS REQUIRED AFTER AWARD OF LOI)	(02)
	ANNEXURE -IV (EXISTING DRAWINGS)	(04)
03	SECTION - 'II' STANDARD TECHNICAL SPECIFICATION	30

TOTAL NUMBER OF SHEETS: 75



**TECHNICAL SPECIFICATION FOR
OIL FILLED SERVICE TRANSFORMERS**

**3 X 660 MW NORTH KARANPURA
STPP**

SPECIFICATION NO. PE-TS-405-302-E001B

VOLUME II

COMPLIANCE CERTIFICATE

REVISION 0 | DATE: 14.01.2020

SHEET 1 OF 1

COMPLIANCE CERTIFICATE

The bidder shall confirm compliance to the following by signing/ stamping this compliance certificate and furnishing same with the offer.

1. The scope of supply, technical details, construction features, design parameters etc. shall be as per technical specification & there are no exclusion/ deviation with regard to same
2. There are no deviation with respect to specification other than those furnished in the 'schedule of deviations'
3. Only those technical submittals which are specifically asked for in NIT to be submitted at tender stage shall be considered as part of offer. Any other submission, even if made, shall not be considered as part of offer.
4. Any comments/ clarifications on technical/ inspection requirements furnished as part of bidder's covering letter shall not be considered by BHEL, and bidder's offer shall be construed to be in conformance with the specification.
5. Any changes made by the bidder in the price schedule with respect to the description/ quantities from those given in 'BOQ-Cum-Price schedule' of the specification shall not be considered (i.e., technical description & quantities as per the specification shall prevail).

BIDDER'S STAMP & SIGNATURE

6.00.00

INSULATION LEVEL

The insulation level for the transformer windings and bushings shall be as follows :

	WINDING		BUSHING	
Highest System Voltage	Rated Power Freq. withstand Voltage (kVrms)	Rated lightning impulse withstand voltage (kVp)	Rated Power freq. withstand voltage (kV rms)	Rated lightning impulse withstand voltage (kVp)
0.433 KV	3	-	3	-
3.6 kV	10	40	10	40
7.2 kV	20	60	20	60
12 kV	28	75	28	75
17.5 kV	38	95	38	95
24kV	50	125	50	125
36kV	70	170	70	170
72.5 kV	140	325	140	325
145kV	275/38*	650	275	650
245 kV	395/38*	950/1050**	460	1050/1050**
420 kV	630/38*	1425/1570**	750	1550/1570***

* In case of non-uniformly insulated.

** Chopped wave BIL.

*** Suitable for chopped wave impulse test on transformers.

SECTION 'I'

SPECIFIC TECHNICAL REQUIREMENTS

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 2 of 41	

1.0 SCOPE OF ENQUIRY

- 1.1 This specification covers the design, manufacture, inspection and testing at manufacturer's works, proper packing and delivery to site of **BIS certified OIL FILLED SERVICE TRANSFORMERS (Star-1 losses as per BEE guideline and BIS Certification for rating upto 2.5 MVA 33kV Class, however the impedance value, list of tests, fittings shall be as per those mentioned in the specification & shall also comply with IS-1180)** as mentioned in different sections of this specification, complete with all accessories for efficient and trouble-free operation.
- 1.2 **Transformer shall match with existing bus duct & termination arrangement. OGA, Foundation, HV cable box & LV bus duct drawing has been provided as part of Speciation.**
- 1.3 It is not the intent to specify herein all the details of design & manufacture. However, the equipment shall conform in all respect to high standards of design engineering and workmanship and shall be capable of performing in continuous commercial operation.
- 1.4 Standard technical requirements of the oil filled service transformers are indicated in Section-II. Project specific requirements/changes are listed in Section-I.
- 1.5 **The requirements of Section-I shall prevail and govern in case of conflict between the corresponding requirements of Section-I and Section-II.**

2.0 BILL OF QUANTITIES:

- 2.1 Quantity requirements shall be as per BOQ-cum-price schedule as part of NIT.

3.0 SPECIFIC TECHNICAL REQUIREMENTS

<u>S.No.</u>	<u>Reference Clause No. of Section-II</u>	<u>Specific Requirement/ Change</u>
1.	1.02.01	The Clause shall be read as Terminal points are HV bushing of transformer

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 3 of 41	

		HV cable gland at transformer						
2.	1.02.02	The Clause shall be read as Terminal points are - LV bushing of transformer - LV cable lugs & gland at transformer						
3.	2.01.00	The Clause shall be read as The equipment shall comply with all currently applicable safety codes and statutory regulations of India as well as of the locality where the equipment is to be installed including Indian Electricity Act, Indian Electricity Rules and Bureau of Indian Standards, BEE Guideline & CEA notification.						
4.	3.03.00	The Clause shall be read as Core shall be high grade non-ageing cold rolled super grain oriented silicon steel laminations of M4 grade or better quality. The core isolation shall be able to withstand a voltage of 2 kV (rms.) for 1 minute in air.						
5.	3.08.00	The Clause shall be read as Main tank shall be provided with conservator tanks of adequate capacity for expansion of oil from minimum ambient to 100 deg.C. The equipment rated 7.5MVA and above shall be provided with air bag breathing through indicating type cobalt free silica gel breather with transparent enclosure. However conventional type conservator with indicating type cobalt free breather (transparent enclosure) may be offered for transformer below 7.5 MVA.						
6.	3.10.00	The Clause shall be read as As per IS: 335. No external inhibitors are permitted. The oil supplied with transformers shall be new and previously unused and must conform to following while tested at supplier's premises and shall have following parameters. <table border="1"> <thead> <tr> <th>S.No</th><th>Property</th><th>Permissible values</th></tr> </thead> <tbody> <tr> <td>1.</td><td>Kinematic Viscosity, mm²/s</td><td> ≤ 12 at 40 °C ≤ 1800.0 at (-)30 °C </td></tr> </tbody> </table>	S.No	Property	Permissible values	1.	Kinematic Viscosity, mm ² /s	≤ 12 at 40 °C ≤ 1800.0 at (-)30 °C
S.No	Property	Permissible values						
1.	Kinematic Viscosity, mm ² /s	≤ 12 at 40 °C ≤ 1800.0 at (-)30 °C						

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 4 of 41	

		2.	Flash Point, °C	≥ 140°C
		3.	Pour point, °C	≤ (-)40 °C
		4.	Appearance	Clear , free from sediment and suspended matter
		5.	Density kg/dm ³ at 20 °C	≤ 0.895
		6.	Interfacial Tension N/m at 25°C	≥ 0.04
		7.	Neutralisation value, mgKOH/g	≤ 0.01
		8.	Corrosive sulphur	Non Corrosive
		9.	Water content mg/kg	≤ 30 in bulk supply ≤ 40 in drum supply
		10.	Anti oxidants additives	Not detectable
		11.	Oxidation Stability -Neutralization value, mgKOH/g -Sludge, % by mass	≤ 1.2 ≤ 0.8
		12.	Breakdown voltage As delivered, kV After treatment, kV	≥ 30 ≥ 70
		13.	Dissipation factor, at 90° C And 40 Hz to 60 Hz	≤ 0.005
		14.	PCA content	≤1%
		15.	Impulse withstand Level, kVp	≥ 145
		16.	Gassing tendency at 50 Hz after 120 min, mm ³ /min	≤ 5

Subsequently oil samples shall be drawn at:

Sr. No.	Parameters	Before filling in main tank at site & tested for	Prior to energization at site for following properties & acceptance norms:
1.	BDV	60 kV (min)	60 kV (min)
2.	Moisture content	10 ppm (max.)	10 ppm (max.)

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 5 of 41	

7.	3.12.01	The Clause shall be read as a) Bushing shall be solid porcelain/condenser/oil communicating type. b) No arcing horns to be provided on the bushings. c) LV bushing palms shall be silver/tin plated. The bushings shall conform to the requirements of IS: 2099 and IS: 3347.
8.	3.15.00	Following point is added NGR is excluded from bidder scope of supply.
9.	3.16.00	The Clause shall be read as Bidder to provide neutral bushing CT as per details given in data sheet – A of section-I, volume-II for restricted earth fault protection or standby earth fault protection. CT Shall be of adequate rating for protection as required, WTI etc. All CTs (except WTI) shall be mounted in the turret of bushings, mounting inside the tank is not permitted. All CT terminals shall be provided as fixed type terminals on the M. Box/CCC/CMB to avoid any hazard due to loose connection leading to CT opening or any other loose connection in power circuit. In no circumstances Plug in type connectors shall be used for CT & Power connection.
10.	3.18.03	The Clause shall be read as The gaskets shall not deteriorate during the life of transformer if not opened for maintenance at site. All joints flanged or welded associated with oil shall be such that no oil leakage or sweating occurs during the life of transformer. The quality of these joints is considered established, only if the joints do not exhibit any oil leakage or sweating for a continuous period of at least 3 months during the guarantee period. In case any sweating / leakage is observed, contractor shall rectify the same & establish for a further period of 3 months of the same. If it is not established during the guaranteed period, the guaranteed period shall be extended until the performance is established.

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 6 of 41	

11.	3.22.00	The Clause shall be read as The conductors shall be of Electrolytic grade copper. All Windings of 66kV and below shall have uniform insulation. Windings are made in dust proof & conditioned atmosphere.
12.	4.01.00- 4.02.00	The Clause shall be read as Transformer shall be provided with, but not restricted to following minimum fittings and accessories for satisfactory operation: - Conservator for main tank with MOG (with low oil level alarm contact), drain valve & indicating type free Cobalt free breather with transparent enclosure (maximum height 1400 mm above rail level) etc. Aircell (for 7.5 MVA & above). - Bucchohz relay, double float type with alarm and trip contacts, along with suitable gas collecting device. - For 2 MVA & above rating transformer/reactor, minimum two numbers of spring operated PRD (with trip contacts) with suitable discharge arrangement for oil shall be provided. For transformers below 2 MVA, diaphragm type explosion vent shall be provided. - OTI & WTI shall be 150 mm dial type with alarm and trip contacts with max. reading pointer & resetting device. (maximum height 1500 mm above rail level) - Top & bottom filter valves with threaded male adapters, bottom sampling valve, drain valve/sludge removal valve at the bottom most point of the tank. - Air release plug, bushing with metal parts & gaskets, terminal connectors on bushings (as applicable) & surge arrestor (as applicable). - Prismatic/toughened glass oil gauge for transformers. - Bi-directional wheel & skids, M. Box, OCTC, Bushing CTs, Insulating Oil, Cooling equipment, Valve Schedule Plate. - Cover lifting eyes, transformer lifting lugs, jacking pads, towing holes and core and winding lifting lugs, additional 4 nos. lifting lugs for bell tank cover, inspection cover,

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 7 of 41	

		manhole, Bilingual R&D Plate, Terminal marking plates, two earthing terminals etc. j) Bolts & nuts (exposed to atmosphere) shall be galvanized steel/SS. k) Rain hoods to be provided on Buchholz, MOG & PRD. Entry points of wires shall be suitably sealed. The fittings listed above are only indicative and other fittings, which generally are required for satisfactory operation of the Transformers are deemed to be included.																
13.	5.00.00	The Clause shall be read as Paint shade shall be finalised to successful bidder during detail engineering as applicable. Adequate quantity of touch up paint shall also be supplied. There shall be no commercial or delivery implication to BHEL on account of paint shade, paint specification/ procedure. <table><tr><th>PARTS NAME</th><th>TYPE OF PAINT</th><th>NO.OF COATS</th><th>TOTAL DFT</th></tr><tr><td>Inside of tank and accessories (except CCC, CMB & M Box)</td><td>Oil & heat resistant fully glossy white</td><td>One coat</td><td>Atleast 30 micron</td></tr><tr><td>External surface of Transformer and accessories including CCC, CMB, M Box (except coolers & radiators)</td><td>Chemical resistant epoxy zinc phosphate primer, MIO (Micaceous iron oxide) as intermediate paint followed by polyurethane finish paint (RAL 5012 Blue)</td><td>One coat each</td><td>Atleast 100 micron</td></tr><tr><td>External Cooler,Radiator surface</td><td>Anticorrosive primary paint followed by</td><td>Two coats each</td><td>Atleast 100 micron</td></tr></table>	PARTS NAME	TYPE OF PAINT	NO.OF COATS	TOTAL DFT	Inside of tank and accessories (except CCC, CMB & M Box)	Oil & heat resistant fully glossy white	One coat	Atleast 30 micron	External surface of Transformer and accessories including CCC, CMB, M Box (except coolers & radiators)	Chemical resistant epoxy zinc phosphate primer, MIO (Micaceous iron oxide) as intermediate paint followed by polyurethane finish paint (RAL 5012 Blue)	One coat each	Atleast 100 micron	External Cooler,Radiator surface	Anticorrosive primary paint followed by	Two coats each	Atleast 100 micron
PARTS NAME	TYPE OF PAINT	NO.OF COATS	TOTAL DFT															
Inside of tank and accessories (except CCC, CMB & M Box)	Oil & heat resistant fully glossy white	One coat	Atleast 30 micron															
External surface of Transformer and accessories including CCC, CMB, M Box (except coolers & radiators)	Chemical resistant epoxy zinc phosphate primer, MIO (Micaceous iron oxide) as intermediate paint followed by polyurethane finish paint (RAL 5012 Blue)	One coat each	Atleast 100 micron															
External Cooler,Radiator surface	Anticorrosive primary paint followed by	Two coats each	Atleast 100 micron															

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 8 of 41	

				high quality full glossy outer finish paint (RAL 5012 Blue)		
			Internal Radiator surface	Hot oil proof, low viscosity varnish and subsequent flushing with transformer oil	-	-
			Internal surface of CCC,CMB & M Box	Chemical resistant epoxy zinc phosphate primer followed by chemical and heat resistant epoxy enamel white paint	Two coats each	Not less than 100 micron
14.	6.03.00	Tests shall be performed in presence of Purchaser's representative. The bidder shall give at least fifteen (15) days advance notice of date when the tests are to be carried out. The contractor shall obtain the employer's approval for the type test procedure before conducting the type test. The type test procedure shall clearly specify the test set-up, instruments to be used, procedure, acceptance norms, recording of different parameters, interval of recording, precautions to be taken etc. for the type test(s) to be carried out				
15.	New Clause	6.07.00. In case the contractor has conducted such specified type test(s) within last ten years as on the date of bid opening (i.e. 28.11.2013), he may submit during detailed engineering the type test reports to the owner for waiver of conductance of such type test(s). These reports should be for the tests conducted on the equipment similar to those proposed to be supplied under this contract and test(s) should have been either conducted at an independent laboratory or should have been witnessed by a client. The owner reserves the right to waive conducting of any or all the specified type test(s) under this contract. In case type				

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 9 of 41	

	tests are waived, the type test charges shall not be payable to the contractor. 6.08.00 Each transformer shall be completely assembled with all fittings & accessories meant for the particular transformer before offering for inspection & testing by purchaser. 6.09.00 ROUTINE / TYPE TESTS ON TRANSFORMERS: <table border="1"> <thead> <tr> <th>S.N.</th><th>Routine Tests</th></tr> </thead> <tbody> <tr><td>1.</td><td>All routine test in accordance with IEC 60076 shall be carried out in all the transformers.</td></tr> <tr><td>2.</td><td>Measurement of Voltage Ratio & phase displacement (as per IEC 60076-1)</td></tr> <tr><td>3.</td><td>Measurement of winding resistance on all the taps (as per IEC 60076-1)</td></tr> <tr><td>4.</td><td>Vector group and Polarity Check (as per IEC 60076-1)</td></tr> <tr><td>5.</td><td>Magnetic Balance and Magnetising Current Test</td></tr> <tr><td>6.</td><td>Measurement of no load current with 415 V, 50 hz AC supply</td></tr> <tr><td>7.</td><td>Measurement of no load losses and current at 90%, 100% & 110% of rated voltage (as per IEC 60076-1)</td></tr> <tr><td>8.</td><td>Load Loss & Short Circuit Impedance Measurement on principal & Extreme Taps</td></tr> <tr><td>9.</td><td>IR measurement (As per IEC 60076-1)</td></tr> <tr><td>10.</td><td>Measurement of capacitance & tan delta to determine capacitance between winding & earth.</td></tr> <tr><td>11.</td><td>Dielectric tests shall be carried out as per IEC 60076-3.</td></tr> <tr><td>12.</td><td>Separate Source Voltage Withstand Test (as per IEC 60076-3)</td></tr> <tr><td>13.</td><td>Induced overvoltage test (ACSD Test)</td></tr> <tr><td>14.</td><td>Repeat no load current/loss measurement & IR after completion of all electrical test</td></tr> <tr><td>15.</td><td>Oil leakage test on completely assembled transformer along with unit coolers/ radiators (as per relevant clause of this sub section)</td></tr> <tr><td>16.</td><td>Jacking test followed by D.P. test</td></tr> <tr><td>17.</td><td>Marshalling Box/Cable box:It shall not be possible to insert a thin sheet of paper under gaskets and through enclosure joints.</td></tr> <tr><td>18.</td><td>IR measurement on wiring of Marshalling Box.</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>S.N.</th><th>Type Tests</th></tr> </thead> <tbody> </tbody> </table>	S.N.	Routine Tests	1.	All routine test in accordance with IEC 60076 shall be carried out in all the transformers.	2.	Measurement of Voltage Ratio & phase displacement (as per IEC 60076-1)	3.	Measurement of winding resistance on all the taps (as per IEC 60076-1)	4.	Vector group and Polarity Check (as per IEC 60076-1)	5.	Magnetic Balance and Magnetising Current Test	6.	Measurement of no load current with 415 V, 50 hz AC supply	7.	Measurement of no load losses and current at 90%, 100% & 110% of rated voltage (as per IEC 60076-1)	8.	Load Loss & Short Circuit Impedance Measurement on principal & Extreme Taps	9.	IR measurement (As per IEC 60076-1)	10.	Measurement of capacitance & tan delta to determine capacitance between winding & earth.	11.	Dielectric tests shall be carried out as per IEC 60076-3.	12.	Separate Source Voltage Withstand Test (as per IEC 60076-3)	13.	Induced overvoltage test (ACSD Test)	14.	Repeat no load current/loss measurement & IR after completion of all electrical test	15.	Oil leakage test on completely assembled transformer along with unit coolers/ radiators (as per relevant clause of this sub section)	16.	Jacking test followed by D.P. test	17.	Marshalling Box/Cable box:It shall not be possible to insert a thin sheet of paper under gaskets and through enclosure joints.	18.	IR measurement on wiring of Marshalling Box.	S.N.	Type Tests
S.N.	Routine Tests																																								
1.	All routine test in accordance with IEC 60076 shall be carried out in all the transformers.																																								
2.	Measurement of Voltage Ratio & phase displacement (as per IEC 60076-1)																																								
3.	Measurement of winding resistance on all the taps (as per IEC 60076-1)																																								
4.	Vector group and Polarity Check (as per IEC 60076-1)																																								
5.	Magnetic Balance and Magnetising Current Test																																								
6.	Measurement of no load current with 415 V, 50 hz AC supply																																								
7.	Measurement of no load losses and current at 90%, 100% & 110% of rated voltage (as per IEC 60076-1)																																								
8.	Load Loss & Short Circuit Impedance Measurement on principal & Extreme Taps																																								
9.	IR measurement (As per IEC 60076-1)																																								
10.	Measurement of capacitance & tan delta to determine capacitance between winding & earth.																																								
11.	Dielectric tests shall be carried out as per IEC 60076-3.																																								
12.	Separate Source Voltage Withstand Test (as per IEC 60076-3)																																								
13.	Induced overvoltage test (ACSD Test)																																								
14.	Repeat no load current/loss measurement & IR after completion of all electrical test																																								
15.	Oil leakage test on completely assembled transformer along with unit coolers/ radiators (as per relevant clause of this sub section)																																								
16.	Jacking test followed by D.P. test																																								
17.	Marshalling Box/Cable box:It shall not be possible to insert a thin sheet of paper under gaskets and through enclosure joints.																																								
18.	IR measurement on wiring of Marshalling Box.																																								
S.N.	Type Tests																																								

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA	REVISION 0	DATE: 14.01.2020
		SHEET 10 of 41	
STPP			

		1.	Lightning impulse(Full & Chopped Wave) test on windings (as per IEC 60076- 3)
		2.	Lightning impulse test on Neutral (*)
		3.	Short circuit test (special test) as per IEC 60076-5.
		4.	Temperature Rise test at a tap corresponding to maximum losses. Gas Chromatography shall be conducted on oil sample taken before & immediately after temp. rise test. Gas analysis shall be as per IS: 9434 (based on IEC: 60567), results will be interpreted as per IS: 10593 (based on IEC: 60599). Result shall be recorded for future reference.
		5.	Measurement of acoustic noise level as per NEMA TR-1 (special test)
		6.	Tank Pressure test (As per CBIP norm)
		7.	Tank vacuum test (As per CBIP norm)
		NOTE:- i) All the type / special tests & temperature rise test shall be conducted after performing Short Circuit Test. If Tank Vacuum & Pressure Test is to be carried out then it shall be conducted before SC test. ii) The power factors should not exceed 0.5% (at 20 oC). However in case of deviation from limiting values the same shall be resolved in line with IEEE Std-62. iii) (*) this test is applicable on Transformer neutral earthed thru NGR. 6.10.00 All metal blanking plates and covers which are specifically required to transport the transformer shall be considered part of the transformer. 6.11.00 Oil leakage test on assembled transformer (Routine Test): All tank and oil filled compartment shall be tested for oil tightness by being completely filled with oil of viscosity not greater than that of specified oil at the ambient temperature and applying pressure equal to the normal pressure plus 35 kN/m2 measured at the base of the tank. The pressure shall be maintained for a period of not less than 6(six) hours during which time no sweating shall occur.	
16.	7.00.00	This clause stands deleted.	

4.0 STANDARD QUALITY PLAN

S.No.	Reference Clause No. of Section- II	Specific Requirement/ Change
1.	ANNEXURE - A	The Clause shall be read as

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 11 of 41	

		Follow ANNEXURE-II Standard Quality Plan of Section-I instead of ANNEXURE-A Standard Quality Plan of Section-II.
--	--	---

5.0 DOCUMENTATION

- 5.1 Documents required along with technical offer shall be as per Annexure-I.
- 5.2 Documents required after award of LOI shall be as per annexure -III.

ANNEXURE – I

DOCUMENTS REQUIRED ALONG WITH TECHNICAL OFFER

- The enclosed Data Sheet-B filled up completely for each rating/ type of transformers.
- Schedule of deviations.
- Schedule of BOQ cum price schedule. (Unpriced)
- 10% Extra oil price schedule (Unpriced)
- Schedule of Mandatory spares. (Unpriced)
- Schedule of Type test. (Unpriced)

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 12 of 41	

DATA SHEET –A

11/0.433 kV ACC SERVICE TRANSFORMER

<u>S. No.</u>	<u>Description</u>	<u>Unit</u>	<u>Particulars</u>
1.0	Quantity	No. & kVA	30 & 2500 kVA
2.0	Installation		Out Door
3.0	Type of insulating oil		Mineral
4.0	No. of phase	No(s)	03
5.0	Frequency	Hz	50
6.0	Type of cooling		ONAN
7.0	Rated Voltage		
	a) HV Winding	kV	11.0
	b) LV Winding	kV	0.433
8.0	No Load transformation ratio		11/0.433
9.0	Vector group		Dyn1
10.0	Impedance voltage at rated current and frequency	%	2500 kVA: 13%
11.0	Total range of tapping's and tapping steps		± 5% in steps of 2.5%
12.0	Type of tap changing equipment		Off-Circuit
13.0	Temperature rise		
	a) Top oil by thermometer	deg. C	40 deg. C above ambient of 50 deg.C
	b) Winding by resistance	deg. C	45 deg. C above ambient of 50 deg.C
14.0	System Highest Voltage		
	a) HV Winding	kV	12 kV
	b) LV Winding	V	415V + 10%,

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 13 of 41	

15.0	Phase Connection		
	a) HV Winding		Delta
	b) LV Winding		Star
16.0	Insulation Levels		
16.1	One-minute power frequency withstand voltage		
	a) HV Winding	kV	28
	b) LV Winding	kV	3
16.2	Impulse withstand voltage		
	a) HV Winding	kVp	75
	b) LV Winding	kVp	-
17.0	Terminal details		
	a) HV Line		Cable box (XLPE cables)
	b) HV Neutral		N.A.
	c) LV Line		Flange throat for TPN non-segregated Al Busduct
	d) LV Neutral		One neutral as part of LV busduct throat and second neutral with copper earthing bar for system earthing brought near the base of the transformer.
18.0	System Fault Level		
	a) HV Winding	kA	40 kA RMS
	b) LV Winding	kA	50 kA RMS
19.0	Method of System Earthing		
	a) HV System		NA
	b) LV System		Solidly grounded
	c) Through fault withstand time		2 Sec.
20.0	Details of Cooling Equipment		Detachable tank mounted radiators

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 14 of 41	

21.0	Provision/ accommodation of CTs LV Neutral	Core 1: 3500/1, $V_k \geq 400V$, $R_{ct} \leq 17\Omega$, $I_e \leq 30mA$ at $V_k/2$ Core 2: 3500/1, 5VA, 5P20
22.0	Colour Shade: a) Interior (For M. Box)	Particulars shall be given to successful bidder during detail engineering. There shall be no commercial implication to BHEL on this account.
	b) Exterior	Particulars shall be given to successful bidder during detail engineering. There shall be no commercial implication to BHEL on this account.
23.0	Space/ Layout Limitation if Any	
24.1	Cable details	(Not in bidder scope of supply)
	a) HV side	
	i) Type	XLPE
	ii) Voltage Grade	12kV Unearthed
	iii) Conductor material & size	Stranded Aluminium, OD: 74 $\pm$ 2 mm
	iv) No. of cores & runs	1R-3C 185
	b) LV side	NA
25.0	Losses	
	a) 'A' (Losses at 50% Load & 75°C)	Losses not to exceed max. losses as per BEE Star-I
	ii) 'B' (Losses at 100% Load & 75°C)	- Do-
26.0	Creepage distance	25mm/kV

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 15 of 41	

DATA SHEET –B

TECHNICAL PARTICULARS

[TO BE SUBMITTED ALOGWITH TECHNICAL OFFER]

S. No	Description	Unit	Requirement	To be filled by bidder
1.	Rating	MVA	2.5	
2.	No Load transformation ratio	kV	11/0.433	
3.	Losses at 50% Load & 75°C (Watts)	W	As per BEE Star-I	
4.	Losses at 100% Load & 75°C (Watts)	W		
5.	Overall Dimensions	mm x mm x mm		
6.	Total weight	kg		
7.	Total oil Quantity	kg		

	TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-TS-405-302-E001B	
		VOLUME II	
		SECTION I	
	3 X 660 MW NORTH KARANPURA STPP	REVISION 0	DATE: 14.01.2020
		SHEET 16 of 41	

DATA SHEET –C

TECHNICAL PARTICULARS

[TO BE SUBMITTED AFTER AWARD OF CONTRACT]

Clause No.	Item	(For AUX Transformer) SHEET 17 of 41		
1.00.00	Manufacturer's name and address			
1.01.00	Standard Applicable			
1.02.00	Rating (MVA)			
1.03.00	Voltage ratio			
1.04.00	Winding connection			
1.05.00	Vector group			
1.06.00	Number of phases			
1.07.00	Frequency (Hz)			
1.08.00	Type of cooling			
1.09.00	Impedance data Guaranteed positive sequence impedance @ 75 deg. C			
	AUX TR	HV-LV	-	-
(a.)	At Principal Tap			
(b.)	At Maximum Tap			
(c.)	At Minimum Tap			
1.10.00	Guaranteed max. losses in KW at 100 % rated voltage at 75 deg. C at principal tap (1)			
	Iron loss at rated voltage & frequency (2)			
	Copper loss at full load			
	(3) Guaranteed Cooler losses at 100% load			
1.11.00	HV winding DC resistance at 75 deg. C			
	(a) Principal tap			
	(b) Maximum tap			
	(c) Minimum tap			
1.12.00	LV winding DC resistance at 75 deg. C			

	(a)Number of coolers and rating as % of transformer cooling equipment	SHEET 18 of 41
	(b)Mounting	
	(c)Fan Motor Data	
	(i)Number per cooler/radiator Cooling requirement (indicate n o. of sp are fans also)	
	(ii) Type & make	
	(iii) Rating	
	(iv) Speed	
	(v) Locked rotor current	
	(e) Cooler/radiator details	
	(i)Overall dimensions l x b x h (mm)	
	(ii)Type of mounting	
	(iii)Weight with oil (kg)	
	(iv)Weight without oil (kg)	
1.14.00	Thermal Data	
	(a) Temperature rise in top oil over an ambient of 50 deg.C	
	(b) Temp erature rise in winding by resistance measurement method over a n ambient of 50deg. C.	
	(c) Thermal time constant (Hours)	
	(d) Oil temperature at cooler inlet at rated load at max temperature	

	load at max temperature	SHEET 19 of 41
	(f) Calculated Hot Spot Temperature (Design value)	
1.15.00	Withstand time for short circuit at terminals (sec.)	
1.16.00	Over excitation withstand time (secs.) for % over excitation of	
	(i) 110%	
	(ii) 125%	
	(iii) 140%	
	(iv) 150%	
	(v) 170%	
1.17.00	Bushings	
	a) High voltage	
	(i) Manufacturer	
	(ii) Type	
	(iii) Rated current (Amps)	
	(iv) Total creepage distance (mm)	
	(v) Mounting	
	c) Low voltage	
	(i) Manufacturer	
	(ii) Type	
	(iii) Rated current (Amps)	
	(iv) Total creepage distance (mm)	
	(v) Mounting	

		SHEET 20 of 41
	e) Low voltage (N)	
	(i) Manufacturer	
	(ii) Type	
	(iii) Rated current (Amps)	
	(iv) Total creepage distance (mm)	
	(v) Mounting	
1.18.00		
	Neutral(LV)Bushing CT Parameters	
	CORE-1/2/3	
	(i) Core no.	
	(ii) Service	
	(iii) Ratio	
	(iv) Accuracy class	
	(v) Knee point voltage (V) min	
	(vi) VA Burden	
	(vii) Max. CT resistance	
	(vii) Magnetisation current (max) at $V_k/2$ (mA)	

		SHEET 22 of 41
	LV Windings	
	(i) Lightning impulse withstand voltage (kVp)	
	(ii) Power frequency withstand voltage (kV)	
	HV Bushings	
	(i) (a) Lightning impulse withstand voltage(kVp)	
	(b) CW Impulse withstand voltage (kVp)	
	(ii) Switching surge withstand voltage (kVP)	
	(iii) Power frequency withstand voltage (KV)	
	LV Bushings	
	(i) Lightning impulse withstand voltage (kVp)	
	(ii) Power frequency withstand voltage (kV)	
	LVN Bushings	
	(i) Lightning impulse withstand voltage (kVp)	
	(ii) Power frequency withstand voltage (kV)	
1.24.00	Approximate Dimensions	
	a) Tank (lxbxh) (mm)	
	b) Overall dimensions with coolers (lxbxh) (mm)	
	c) Height for un-tanking (mm)	
	d) Shipping dimensions	
	e) Dimensions of largest package(lxbxh) (mm)	

	a) Core (kg.)	SHEET 23 of 41
	b) Windings (kg.)(copper)	
	c) Total cellulose weight (kg)	
	d) Weight of Paper insulation (kg)	
	e) Weight of Press board, frame, barrier spacer etc (kg)	
	f) Tank and fittings (kg)	
	g) Oil (kg)	
	h) Untanking weight (heaviest piece) (kg)	
	i) Total weight (kg)	
	j) Weight of heaviest pkg. (kg)	
	k) Total shipping weight (kg)	
	l) Parts detached for transport(furnish list)	
1.26.00	Permissible overloading (% of rating and time in minutes)	
1.27.00	(a.)Clearances to tank in oil (mm)	
	(b.) Minimum clearance of HV winding to earth in oil (mm)	
	(c.) Clearance between coils & core(mm)	
	(d.) Clearance between coils (mm)	
	(e.) Clearance between neutral to ground (mm)	
1.28.00	Conservator	
	a) Total volume (Liters)	
	b) Volume between highest and lowest levels (Liters)	
1.29.00	Capacitance Values (pF)	
	b) LV to earth	
	c) HV to LV	
	d) Tap winding to earth	
1.30.00	a) Type of oil preservation	
	b) Material of diaphragm/air cell	
	c) Continuous temperature withstand/ capability of the diaphragm/air cell	

	a) Quality of oil	SHEET 24 of 41
	i) Moisture content (ppm)	
	ii) Max. tan-delta value	
	iii) Interfacial tension(N/m)	
	iv) Breakdown strength (kV)	
	b) Total Quantity including 5% extra (liters)	
		Before Energizing
	i) Moisture content (ppm)	
	ii) Max. tan-delta value	
	iii) Interfacial tension(N/m)	
	iv) Breakdown strength (kV)	
	b) Total Quantity including 5% extra (liters)	
	c) Oil flow inside Transformer (Directed/ Forced/ Normal)	
1.32.00	Core	
	a) Type of construction(core/shell)	
	b) Net core area (mm ²)	
	c) Core material and grade used	
	d) Type of joint between core and yoke	
	e) Thickness of stamping (mm)	
	f) Percentage silicon content (%)	
	g) Maximum flux density in core at rated frequency and at	
	i) 90% voltage (wb/m ²)	
	ii) 100% voltage (wb/m ²)	
	iii) 110% voltage (wb/m ²)	
1.33.00	Winding	
	a) Type of winding	
	i) HV	
	iii) LV	
	iv) Tap	
	b) Current density at rated load	
	ii) HV (A/mm ²)	

	iii) LV (A/mm ²)	SHEET 25 of 41
	iv) Tap	
	c) Conductor area (mm ²)	
	i) HV	
	iii) LV /LV1/LV2	
	iv) Tap	
	d) Magnetizing inrush current(Amps)	
	i) % Component of 2 nd harmonic current (max & min)	
	e) No load current (Amps) at rated frequency and at	
	i) 90% voltage	
	ii) 100% voltage	
	iii) 110% voltage	
	f) Magnetising current at rated frequency and at rated voltage	
	g) Leakage reactance	
	i) HV	
	ii) MV	
	iii) LV /LV1/LV2	
	h) Resistance	
	i) HV	
	ii) MV	
	iii) LV /LV1/LV2	
	i) Air core reactance of HV winding	
1.34.00	Tank	
	a) Tank cover-Conventional/Bell Type	
	b) Approximate thickness of	
	i) Side (mm)	
	ii) Bottom (mm)	
	iii) Cover	
1.35.00	Vacuum withstand capability of	
	a) Main tank	
	b) Coolers and accessories	
1.36.00	Minimum draw bar pull required to move the transformer on level track(kg)	
1.37.00	Size of filter hose	
1.38.00	Fault level	

QUALITY ASSURANCE

OUT DOOR TRANSFORMER

Attributes / Characteristics Items/Components Sub Systems	Visual & Dimensional Checks	Mechanical properties	Electrical strength	Thermal properties	Chemical Composition	Compatibility with oil	NDT / DPT / MPI / UT	Ageing Test.	Voltage Ratio, Vector Group & Polarity, Magnetic Balance Test	Make / Type / Rating / Model / TC / General	WPS & PQR	Routine Test as per relevant test	Routine Test
Tank, H.V. & L.V. Cable Box / Flange throat	Y	Y					Y						
Conservator / Radiator / Cooler / Pipes	Y	Y					Y						
Copper Conductor (IS:191)	Y	Y	Y		Y								
Insulating Material	Y	Y	Y	Y	Y	Y							
CRGO Lamination & Built Core	Y	Y	Y		Y	Y							
Bushing / Insulator (IS:2544 / 5621)	Y	Y								Y		Y	
Gasket	Y				Y	Y		Y				Y	
Transformer Oil (IS:335 / IEC296)												Y	
Off-Circuit Tap Changer	Y									Y			
Core Coil Assembly & Pre-tanking	Y								Y				
Marshalling Box	Y	Y					Y					Y	
WTI, OTI, MOG, PRD, Breather, Terminal Connector, Buchholz Relay, Globe & Gate Valve,	Y									Y			
Welding (ASME Sect-IX)	Y										Y		
Complete Transformer (IS:2026/ IEC-60076)	Y												Y

Note: 1) This is an indicative list of tests / checks. The manufacturer is to furnish a detailed Quality Plan indicating the practice and procedure along with relevant supporting documents.
2) All major Bought Out Items will be subject to NTPC approval.

ANNEXURE-II
STANDARD QUALITY PLAN

[illegible]



ITEM (MATERIAL, CLASS, GRADE, RATING, RANGE, SIZE ETC.) :		STANDARD QUALITY PLAN												
Oil Filled Transformers (Up to 5 MVA, 33 kV Class)		CONFORMING TO CODE : NTPC TECHNICAL SPECIFICATION / IEC:60076												
Sl No	COMPONENT & OPERATIONS	CHARACTERISTICS	CLASS	TYPE OF CHECK	QUANTUM OF CHECK			REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD	AGENCY			
					M	CN	N				M	C	N	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	
1.05	Press-Board	a) Make, Type, Dimensions	Major	Measure	As per IS/Plant Std	As per IS/Plant Std	Mfr Plant Std./IS-1576	Plant Std./IS-1576	QC Record	P	V	V	V	
		b) Compressibility	-do-	Test	-do-	-do-	-do-	-do-	Supplier's TC	V	-	-	-	
		c) Density	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		d) Tensile strength	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		e) pH Value/Conductivity of Water extract	-do-	-do-	-do-	-do-	-do-	-do-	-do-	P	V	V	V	
		f) Electrical Strength in air and oil	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	
		g) Shrinkage in air & oil	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		h) Flexibility/ Elongation	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		i) Ash content	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		j) Moisture content	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		k) Oil absorption	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		l) Cohesion between plies	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
1.06	Densified Wood	a) Dimensions & Type	Major	Measure	As per IS/Plant Std	As per IS/Plant Std	Mfr Plant Std./IS-3513/IS3400- P-II	Mfr Plant Std./IS-3513	QC Record	P	-	-	-	
		b) Surface finish	-do-	Visual	-do-	-do-	-do-	-do-	-do-	P	-	-	-	
		c) Electrical Strength in air and oil	-do-	Test	-do-	-do-	-do-	-do-	Supplier's TC	V	V	V	V	
		d) Oil absorption	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		e) Shrinkage in air & oil	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		f) Moisture content	-do-	Test	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		g) Compression strength	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		h) Crossbreaking strength	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		i) Tensile strength	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		j) Density	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		k) Specific gravity	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
1.07	Gasket Synthetic Rubber or Acryo Nitrile Butadine Rubber for Gasket	a) Dimensions, Grade & Type	Major	Measure	As per IS/Plant Std	As per IS/Plant Std	Mfr Plant Std./IS-4253-P-I/II	Plant Std./IS-4253-P-I/II	QC Record	P	-	-	-	
		b) Hardness	-do-	-do-	-do-	-do-	-do-	-do-	Supplier's TC	V	V	V	V	
		c) Tensile strength	-do-	Test	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		d) Compressibility	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		e) Recovery	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		f) Compression set	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		g) Flexibility	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		d) Ageing in air & oil	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	
		e) Accelerated ageing	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		f) Chloride/Sulphate content of water extract	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	
		g) Density	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-	-	

LEGEND: * RECORDS, INDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.

*** M: Mfr /SUB-SUPPLIER C: MAIN SUPPLIER, N: NTPC CHIP: NTPC SHALL IDENTIFY IN COLUMN "N" AS "W".

P: PERFORM W: WITNESS AND V: VERIFICATION. AS APPROPRIATE.

Q.P. No: 0000-999-QOE-S-036, Rev No: 0

Date: 20.02.2013

Page: 2 of 8

VALID UPTO: 19.02.2016

REVIEWED BY

Banish K. Jha

H Shekhar

B D Prasad

APPROVED BY

Banish K. Jha

H Shekhar

B D Prasad

REMARKS

LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.

** M: Mfrt/SUB-SUPPLIER C: MAIN SUPPLIER, N: NTPC P: PERFORM W: WITNESS AND V: VERIFICATION, AS APPROPRIATE.

CHP: NTPC SHALL IDENTIFY IN COLUMN "N" AS "W".

ITEM (MATERIAL, CLASS, GRADE, RATING, RANGE, SIZE ETC.) :		STANDARD QUALITY PLAN										CONFORMING TO CODE :		QP No: 0000-999-QOE-S-036, Rev No: 0										REVIEWED BY		APPROVED BY	
Sl No	COMPONENT & OPERATIONS	CHARACTERISTICS	CLASS	TYPE OF CHECK	QUANTUM OF CHECK			REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD			AGENCY			Date: 20.02.2013	Page: 3 of 8	VALID UPTO: 19.02.2016	REMARKS	REVIEWED BY	APPROVED BY						
					M	C/N	As per IEC/IS			As per IEC/IS	As per IEC/IS	M	C	N	D*							9	8	7			
1.08	Insulating Oil	a) Make, Appearance of oil	Major	Visual	As per IEC/IS	As per IEC/IS	As per IEC/IS	IEC-296/IS-335	NTPC Specification	Supplier's TC	9	D*	V	V	V	V	V	V	V	V	V						
		b) Density, Resistivity	-do-	Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		c) Kinematic Viscosity	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		d) Interfacial Tension	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		e) Flash & pour point	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		f) Neutralisation value	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		g) Corrosive Sulfer Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		h) Water content	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		i) Anti Oxidants Additives	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		j) Oxidation Stability, Neutralisation Value in mgKOH/g and Sludge %	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		k) Breakdown Voltage (As delivered and after treatment)	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		l) Dissipation factor	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		m) PCA Content	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		n) Impulse withstand Level	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		o) Gassing tendency	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		q) Ageing characteristics at 115° C for 96 hours	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
		r) S.K. Value	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V	V	V	V	V	V	V						
2.00	FITTING AND ACCESSORIES																										
2.01	Porcelain Busings	a) Make, Rating, Dimensions	Major	Measure	As per IS/Plant Std	As per IS/Plant Std	As per IS/Plant Std	IS:2099/IS:3347/IS:12676/NTPC Spec.	IS:2099/IS:3347/IS:12676/NTPC Spec.	QC Record			P	-	-												
		b) Visual Defects	-do-	Visual	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	P	-	-												
		c) Routine testing	-do-	Testing	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	P	-	-												
2.02	Buchholz Relay	a) Type, Size & Make	Major	Visual	As per IS/Plant Std	As per IS/Plant Std	As per IS/Plant Std	Plant Std./IS:3637	Plant Std./IS:3637	QC Record			P	V	V												
		b) Continuity for alarm & trip (Performance)	-do-	Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V												
		c) Porosity Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V												
		d) High Voltage & IR Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V												
		e) Element Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V												
		f) Gas Voulme Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V												
		g) Loss of Oil & Surge Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	V	V												
2.03	Pressure Relief Device (if applicable)	a) Type, Size & Make	Major	Visual	10%	As per IS/Plant Std	Mfr Plant Std./IS:3637	Plant Std./IS:3637	QC Record				P	V	V												
		b) Operation (Pressure & flag indication)	-do-	Test	-	-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-												
		c) Switch Contact Operation	-do-	-do-	-	-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-												
		d) HV Test	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	-do-	V	-	-												

LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.

** M: Mfr / SUB-SUPPLIER C: MAIN SUPPLIER. N: NTPC

CHP: NTPC SHALL IDENTIFY IN COLUMN "N" AS "W".

W: WITNESS AND V: VERIFICATION. AS APPROPRIATE.

P: PERFORM

LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.

** M: Mfr / SUB-SUPPLIER C: MAIN SUPPLIER, N: NTPC P: PERFORM W: WITNESS AND V: VERIFICATION, AS APPROPRIATE.

CHP: NTPC SHALL IDENTIFY IN COLUMN "N" AS "W".



ITEM (MATERIAL, CLASS, GRADE, RATING, RANGE, SIZE ETC.):		STANDARD QUALITY PLAN										REVIEWED BY		REMARKS		
Oil Filled Transformers (Up to 5 MVA, 33 kV Class)		CONFORMING TO CODE : NTPC TECHNICAL SPECIFICATION / IEC:60076										Banish K. Jha H Shekhar B D Prasad		Approved Approved Approved		
Sl No	COMPONENT & OPERATIONS	CHARACTERISTICS	CLASS	QUANTUM OF CHECK		REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD				AGENCY		Rev No: 0		
				TYPE OF CHECK	M			C/N	5	6	7	8	9		D*	M
2.04	Magnetic Oil Level Gauge	a) Type, Size & Make b) Dial Marking c) Switch Continuity d) Leak Test e) HV Test f) Operational test	Major	Visual	10%	-	NTPC Spec/ Plant Std / Mfr Drg	NTPC Spec/ Plant Std / Mfr Drg	QC Record	P	-	-	-	-	-	-
2.05	Off-Circuit Tap Changer (if applicable)	a) Dimensions, Alignment of padlocking arrangement b) Physical condition c) Operation of Switch d) Insulation Resistance Test e) Leak Test of Handle Stuffing Box	Major	Measure	10%	As per IS / Plant Std	Mfr Drg. / Mfr Plant Std	Mfr Drg. / Mfr Plant Std	QC Record	P	V	-	-	-	-	-
2.06	On Load Tap (if applicable)	a) Visual Check, make, type b) Dimensional check c) Mechanical operation on Diverter & selector switch d) HV test on auxiliary circuit	Major	Visual Measure verify	100%	-	IS: 2026 / IS: 8468	IS: 2026 / IS: 8468	QC Record	P	V	-	-	-	-	-
2.07	Valves (Gate/Globe/ Butterfly)	a) Dimensional check b) Type, Size & Make c) Hydraulic/ Leakage Test (for Body & Seat) d) Operational Test (Smooth Close & Open)	Major	Visual Measure	10%	As per IS / Plant Std	Mfr Drg/Plant Std / IS: 778-P-1	Mfr Drg/Plant Std / IS: 778-P-1	QC Record	P	V	-	-	-	-	-
2.08	Marshalling Kiosk & Remote Tap Control (RTCC)	a) Dimensional/Visual checks, makes of MB & mountings b) 2 kV insulation test on auxiliary wiring c) IP-55 Degree of protection by thin paper insertion d) Check for paint, shade & thickness	Major	Visual Test	100%	As per IS / Plant Std	NTPC Appd Drgs	NTPC Appd Drgs	QC Record	P	V	-	-	-	-	-
2.09	OTI & WTI	a) Type, Size & Make b) HV Test c) Temperature Calibration d) Switch setting & switch differential e) Calibration & operation of Switch	Major	Visual Test	100%	As per IS / Plant Std	NTPC Spec./ IS: 101-P-IV-Sec-2	NTPC Spec./ IS: 101-P-IV-Sec-2	QC Record	P	V	-	-	-	-	-

LEGEND: * RECORDS, INDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.

** M: Mfr / SUB-SUPPLIER C: MAIN SUPPLIER, N: NTPC P: PERFORM W: WITNESS AND V: VERIFICATION, AS APPROPRIATE.

CHP: NTPC SHALL IDENTIFY IN COLUMN "N" AS "W".

LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.

** M: Mfr / SUB-SUPPLIER C: MAIN SUPPLIER N: NTPC P: PERFORM W: WITNESS AND V: VERIFICATION, AS APPROPRIATE.

CHP: NTPC SHALL IDENTIFY IN COLUMN "N" AS "W".



ITEM (MATERIAL, CLASS, GRADE, RATING, RANGE, SIZE ETC.):		STANDARD QUALITY PLAN										REVIEWED BY		APPROVED BY		REMARKS
Oil Filled Transformers (Up to 5 MVA, 33 kV Class)		CONFORMING TO CODE : NTPC TECHNICAL SPECIFICATION / IEC:60076										Banish K. Jha		H Shekhar		
		NTPC TECHNICAL SPECIFICATION / IEC:60076										B D Prasad		H Shekhar		
Q.P. No: 0000-999-QOE-S-036, Rev No: 0		Q.P. No: 0000-999-QOE-S-036, Rev No: 0										Date: 20.02.2013		Page: 5 of 8		
VALID UPTO: 19.02.2016		VALID UPTO: 19.02.2016										FORMAT OF RECORD		AGENCY		
												D#		M		
												9		C		
												10		N		

ITEM (MATERIAL, CLASS, GRADE, RATING, RANGE, SIZE ETC.) :		STANDARD QUALITY PLAN										REVIEWED BY		APPROVED BY						
Oil Filled Transformers (Up to 5 MVA, 33 kV Class)		CHARACTERISTICS		CLASS	TYPE OF CHECK	QUANTUM OF CHECK		REFERENCE DOCUMENT	ACCEPTANCE NORMS	FORMAT OF RECORD		AGENCY		Date: 20.02.2013 Page: 6 of 8 VALID UPTO: 19.02.2016		Banish K. Jha H Shekhar B D Prasad		H Shekhar B D Prasad		
Sl No	COMPONENT & OPERATIONS	3		4	5	M	C/N	6	7	8	9	D*	M	C	N	REMARKS				
1	2															11				
3.04	Test on core	d) Freedom from overlaps & air gap at joints. e) Core verticality f) Limb & stack thickness g) Limb clamping & binding h) Core Diameter i) Earthing of Core		Major	Measure	100%	-	-do-	-do-	-do-	-do-	QC Record	P	-	-					
3.05	Winding	a) Pre-core Loss measurement b) Brazing procedure, PQR & Brazing qualification c) Conductor size d) Radial Depth of winding e) Anchoring & Binding f) No of turns. g) Transposition & cross overs h) Dimensional checks i) Insulation arrangement & alignment j) Winding length k) Brazed joints l) Lead & Coil identification and marking m) Free from damages n) Continuity test for leads o) IR Test		Major	Review	100%	100%	-do-	-do-	-do-	-do-	QC Record	P	-	-	-	At start & finish OD, ID & axial length			
3.06	Core coil assembly	a) Cleanliness of core b) Alignment of spacers /blocks c) Cleaning of Core before Coil Assembly d) Arrangement of Top & Bottom Insulation and Pressure rings. e) Resting of Common Blocks on Active Part f) Isoalation Test of Core, if applicable g) Earthing of core		Major	Visual	100%	-	-do-	-do-	-do-	-do-	QC Record	P	-	-	-				
3.07	Connection and tap switch assembly	a) Ratio Test on all taps b) Lead disposition c) Brazing of joints d) Crimping of joints e) Insulation over joints f) Vector group		Major	Test	100%	-	-do-	-do-	-do-	-do-	QC Record	P	-	-	-				

LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.

** M: Mfr / SUB-SUPPLIER C: MAIN SUPPLIER, N: NTPC P: PERFORM W: WITNESS AND V: VERIFICATION, AS APPROPRIATE.

CHP: NTPC SHALL IDENTIFY IN COLUMN "N" AS "W".

LEGEND: * RECORDS, IDENTIFIED WITH "TICK" (✓) SHALL BE ESSENTIALLY INCLUDED BY SUPPLIER IN QA DOCUMENTATION.

** M: Mfr / SUB-SUPPLIER C: MAIN SUPPLIER, N: NTPC P: PERFORM W: WITNESS AND V: VERIFICATION, AS APPROPRIATE.

CHIP: NTPC SHALL IDENTIFY IN COLUMN "N" AS "W".

Format No.: QS-01-QAI-P-10/F3-RL

Engg Div / QA I

Format No.: QS-01-QAI-P-10/F3-RL


S.No	Description of Drgs/Docs	No of Prints	No of ROMs/DVDs/Portable Hard Disk	CD
1	Drawings, Data sheets, Design calculations, Purchase specifications and other documents			
	First submission and submission with major changes			
	▪ Layout (A0&A1 sizes)	4	-	
	▪ Other Drawings/Documents (A0&A1 sizes)	2	-	
	▪ P&ID (All sizes)	4	-	
	a) Final drawings/documents (Directly to site)	6	2	
	b) "As Built" Drawing/Documents (Directly to site)	6	2	
	c) Analysis reports of Equipments / piping /structures components/system employing software packages as detailed in the specifications.	2	2	
2	Erection Manual (Directly to site)	4 sets	2	
3	Operation & Maintenance manual			
	i) First Submission	1 set	--	
	ii) Final Submission (Directly to site)	4 sets	2	
4	Plant Hand Book			
	i) First Submission	1	1	
5	Commissioning and Performance Test Procedure manual			
	i) First Submission	1 set	--	
	ii) Final Submission (Directly to site)	4 sets	2	

SI No	DWG. / DOCUMENT No.	DOCUMENT TITLE	SUBMISSION SCHEDULE
1	PE-V0-405-302-E802	SERVICE TRANSFORMER O & M MANUAL	Within one week after conduction of Type test
2	PE-V0-405-302-E147	2500KVA TRANSFORMER (11/0.433KV) LV BUS DUCT TRUNKING DRAWING	Within two weeks from the date of LOI
3	PE-V0-405-302-E149	2500KVA TRANSFORMER (11/0.433KV) L.V. BUSHING	Within two weeks from the date of LOI
4	PE-V0-405-302-E150	2500KVA TRANSFORMER (11/0.433KV) LVN BUSHING	Within two weeks from the date of LOI
5	PE-V0-405-302-E805	SERVICE TRANSFORMER TYPE TEST REPORTS	Within one week after conduction of Type test
6	PE-V0-405-302-E042	2500 KVA SERVICE TRANSFORMER (11/0.433KV) OUTLINE GENERAL ARRANGEMENT DRAWING [OGA]	Within two weeks from the date of LOI
7	PE-V0-405-302-E144	2500KVA TRANSFORMER (11/0.433KV) FOUNDATION PLAN	Within two weeks from the date of LOI
8	PE-V0-405-302-E145	2500KVA TRANSFORMER (11/0.433KV) GENERAL ARRANGEMENT OF MARSHALLING BOX	Within two weeks from the date of LOI
9	PE-V0-405-302-E151	2500KVA TRANSFORMER (11/0.433KV) VALVE SCHEDULE PLATE	Within two weeks from the date of LOI
10	PE-V0-405-302-E152	2500KVA TRANSFORMER (11/0.433KV) WIRING DIAGRAM FOR MARSHALLING BOX	Within two weeks from the date of LOI
11	PE-V0-405-302-E041	2500 KVA SERVICE TRANSFORMER (11/0.433KV) TECHNICAL DATA SHEET	Within two weeks from the date of LOI
12	PE-V0-405-302-E803	SERVICE TRANSFORMER PAINTING PROCEDURE	Within two weeks from the date of LOI
13	PE-V0-405-302-E043	2500 KVA SERVICE TRANSFORMER (11/0.433KV) RATING & DIAGRAM PLATE	Within two weeks from the date of LOI
14	PE-V0-405-302-E148	2500KVA TRANSFORMER (11/0.433KV) H.V. BUSHING	Within two weeks from the date of LOI
15	PE-V0-405-302-E146	2500KVA TRANSFORMER (11/0.433KV) HV CABLE BOX ARRANGEMENT DRAWING	Within two weeks from the date of LOI
16	PE-V0-405-302-E801	SERVICE TRANSFORMER FIELD QUALITY PLAN	Within two weeks from the date of LOI
17	PE-V0-405-302-E901	QUALITY PLAN FOR SERVICE TRANSFORMERS	Within two weeks from the date of LOI
18	PE-V0-405-302-E155	2500KVA TRANSFORMER (11/0.433KV) DESIGN CALCULATIONS FOR SHORT CIRCUIT CAPABILITY	Within two weeks from the date of LOI
19	PE-V0-405-302-E153	2500KVA TRANSFORMER (11/0.433KV) TRANSPORTATION DETAILS	Within two weeks from the date of LOI

ANNEXURE-IV


NOTES: -

1. TOLERANCE IN WEIGHT & DIMENSIONS ARE SUBJECTED TO $\pm 10\%$
2. PAINT SHADE : RAL 5012(polyurethane)
PAINTING TO BE DONE AS PER SPECIFICATION
3. POSITION OF FITTINGS AND ACCESSORIES MAY CHANGE DURING FABRICATION
4. ALL THE CTS SHALL BE PLACED IN LV POCKET.
5. ALL MAKES AS PER NTPC QA APPROVED.

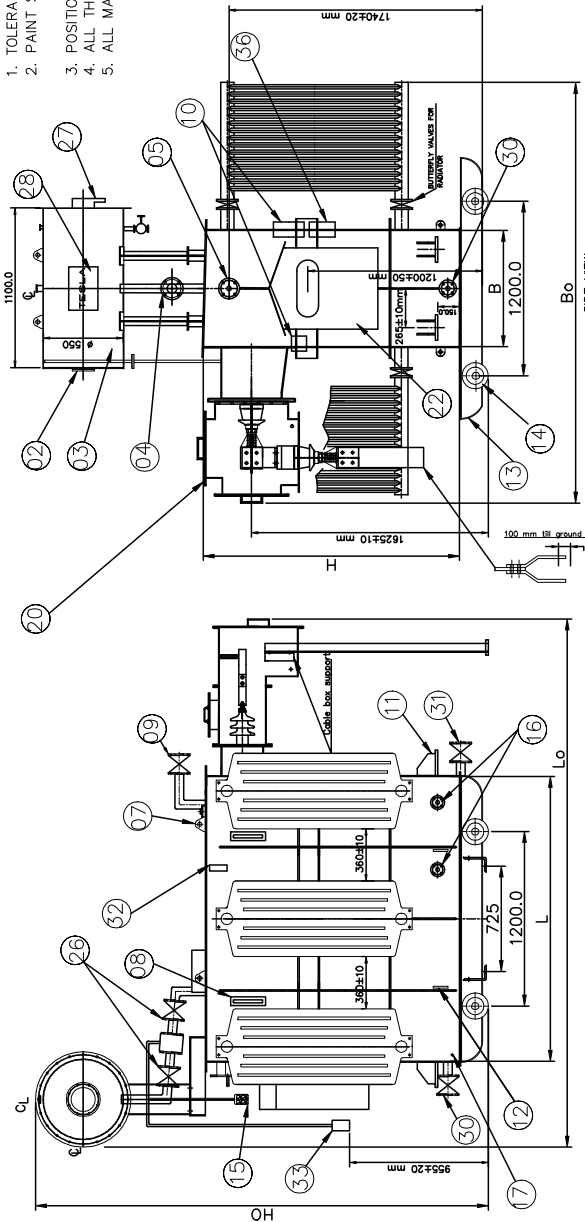

FRONT VIEW

SIDE VIEW

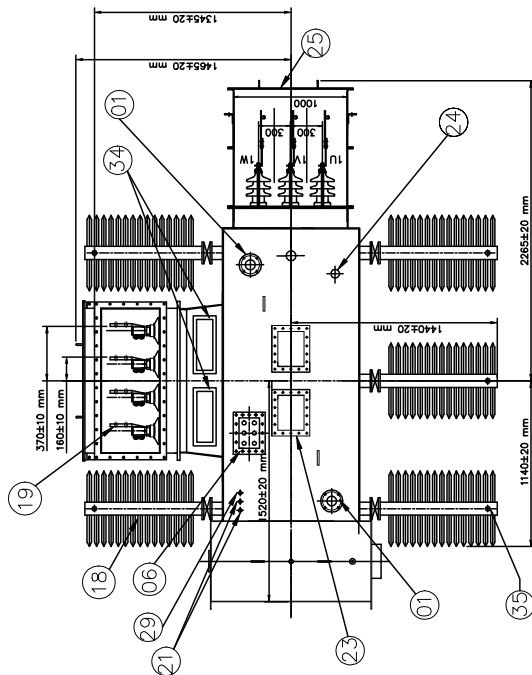

TOP VIEW
DIRECTION OF
WITHDRAWAL
TRANSFORMER

IT.NO.	DESCRIPTION	QTY	MAKE
01	PRD T-3 with Contacts rainhood & provision of pipe for oil discharge	02	Viat
02	Prismatic Oil Level Gauge (Toughened Glass)	01	*
03	Conservator With Oil Filling Head/Top & Drain Valve/250mm With Binding plate	01	*
04	Double Float Type Buchholz Relay GOR-II (50mm) With A/T Contact & rain hood	01	Atvua /Yogya
05	Off Load Tapchanger Handle with locking arrangement	01	Alwaye
06	WT Cl & NCT Terminal	01	*
07	Top Cover Lifting Lugs	02	*
08	Transformer Lifting Lugs	04	*
09	Top Filter Valve (50 NB)	01	Apex
10	Rating Diagram & Valve Schedule Plate	01 Each	*
11	Jacking Pad	04	*
12	Pulling Lugs	04	*
13	Base Channel (150 X 75)	*	*
14	Bi-directional rollers 180 mm Dia.	04	*
15	CV Type Silica Gel Breather (2 Ka-Cobalt Free) Transparent/Endcure	01	Yogya Enterprises
16	Top & Bottom Sampling Valve (15 NB)	01 Each	Apex
17	Earthing Terminal(12 x 30 mm Lg.)	02	*
18	Radiator 1200 X 520 X 15 Fins with butterfly valves & Drain Plug	05	Lexmark
19	LV Porcelain Bushing 1.1 KV 4500 Amps.	04	CJ/Mileen Engg
20	LV Bus Duct Box With Extra Neutral (1.1 KV 4500 Amps)	01	*
21	Thermometer Pocket For Oil & WTI	01 Each	*
22	Marshalling Box Housing Oil & WTI	01	*
23	Top Cover Inspection Pocket	02	*
24	Air Release Plug 1" BSP	01	*
25	HV disconnecting type Cable Box With Bushing (17.5KV/2000 Amps.)	01	CJ/Aspur Gears/Gensha
26	Shut off Valve for Buchholz Relay (50 mm)	02	Apex
27	Magnetic Oil Level Gauge with Rain Hood	01	Atvua
28	Manufacturing Name Plate	01	*
29	Thermometer Pocket	01	*
30	Bottom Filter valve (50 NB)	01	Apex
31	Drain cum sludge Valve(50 NB)	01	Apex
32	Oil level gauge for tank	01	*
33	Gas Collecting Device for Buchholz Relay	01	Yogya
34	LV Pocket Inspection Cover	02	*
35	Air release plug for radiators 1/2" BSP	05	*
36	Hand Rating cum Drawing Plate	01	*

CUSTOMER



NTPC Limited

ENGINEERING DIVISION
(A GOVERNMENT OF INDIA ENTERPRISE)

PROJECT NAME
NORTH KARANPURA SUPER THERMAL POWER PROJECT







BHARAT HEAVY ELECTRICALS LTD

POWER SECTOR
PROJECT ENGINEERING MANAGEMENT, Noida

TITLE
G.A Drawing OF 2500 KVA
11/0.433 KV Transformer



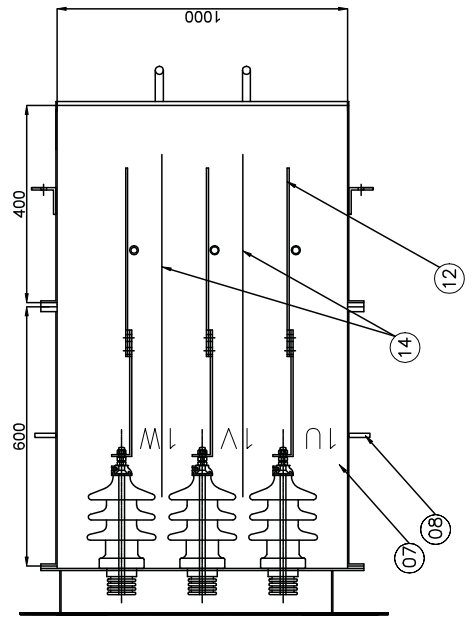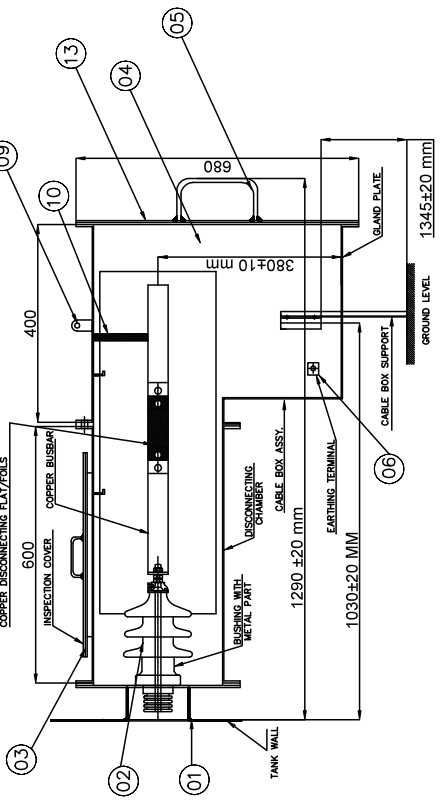

CABLE GLAND PLATE
GLAND PLATE MATERIAL : M.S.
THICKNESS : 3.15 mm

NOTE :-

- (1) Bottom Plate of C/B will be supplied undrilled
- (2) Double Compression Gland is in TESLA scope.
- (3) Suitable For 1 Run 3 Core 185 Sq. mm Unarmoured XLPE Aluminum Cable
- (4) Degree of Protection IP : 55
- (5) Disconnecting Box shall be possible to move along with 1/F , without distributing the cable termination.
- (6) C/Box and Disconnecting Chamber shall be Air Insulated Type
- (7) Cable Box shall be Phase Segregated and Air Insulated Type
- (8) Cable Box Paint Shade: RAL 5012

Sr.No.	DESCRIPTION	QUANTITY
01	TRANSFORMER TANK	01
02	PORCELAIN BUSHING 17.5 KV, 2000 Amps.	03
03	D.C. TOP/INSPECTION COVER	01
04	CABLE BOX(C.B.)	01
05	HANDLE	02
06	EARTHING TERMINAL ON OPPOSITE SIDES	02
07	DISCONNECTING CHAMBER(D.C.)	01
08	D.C. LIFTING LUG	02
09	C.B. LIFTING LUG	02
10	BUS BAR SUPPORT INSULATOR	01/Phase
11	DOUBLE COMPRESSION CABLE GLAND	01
12	TINNED COPPER BUS BAR(250 SQ. MM min.)	01/Phase
13	C.B. FRONT/INSPECTION COVER	01
14	FRP TYPE PHASE SEGRAGATOR	02

CUSTOMER



NTPC Limited
ENGINEERING DIVISION
(A GOVERNMENT OF INDIA ENTERPRISE)



PROJECT NAME
NORTH KARANPURA SUPER THERMAL POWER PROJECT

(3 X 660 MW)



BHARAT HEAVY ELECTRICALS LTD
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT, NOIDA

TITLE
HV Cable Box with Disconnecting Chamber
DRAWING OF 2500 KVA 11/0.433 KV Transformer

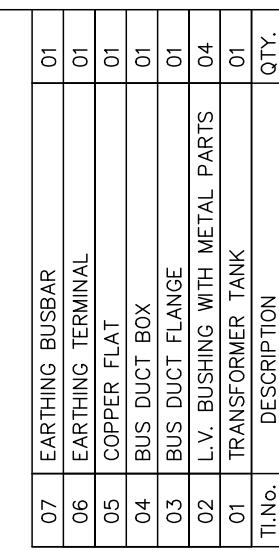

NOTE :
1--: BUS DUCT BOX OPENING : – L.V : TOP AND FRONT
2--: THE TOP & FRONT COVER OF BOX IS REMOVABLE.
3--: PAINT SHADE : RAL 5012

CUSTOMER



NTPC Limited
ENGINEERING DIVISION
A GOVERNMENT OF INDIA ENTERPRISE)

PROJECT NAME
NORTH

SUPER THERMAL POWER PROJECT
(3 X 660 MW)



BHARAT HEAVY ELECTRICALS LTD
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT, NOIDA

TITLE
L. V. BUS DUCT BOX DRAWING FOR
2.5 MVA 11/0.433 KV Transformer

SECTION 'II'

STANDARD TECHNICAL SPECIFICATION

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 2 of 30

1.00.00 SCOPE

1.01.00 This specification covers the design, manufacture, inspection & testing, packing at manufacturer's works and delivery to site of mineral oil filled service Transformers complete with all fittings & accessories for satisfactory operation at site.

1.02.00 TERMINAL POINTS

1.02.01 HV bushings with terminal connector for bus duct/ cable glands & lugs in case of cable connection.

1.02.02 LV bushings with terminal connector (3 Phase + 1 Neutral) for bus duct/ cable glands & lugs in case of cable connection.

1.02.03 For HV Earthing : (Applicable in case of star connection of HV) - neutral earth busbar brought near the base of transformer/ Cable glands & lugs in case of cable connection.

1.02.04 For LV Earthing : - neutral earth busbar brought near the base of transformer/ Cable glands & lugs in case of cable connection

1.02.05 Transformer earthing pads.

1.02.06 Terminals of marshalling box for external connection to equipment supplied by the purchaser.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 3 of 30

2.00.00 CODES AND STANDARDS

S.NO.	STANDARD NUMBER	STANDARD TITLE
1	IS: 2026 IEC: 60076	POWER TRANSFORMERS
2	IS:1180	OUTDOOR TYPE OIL IMMERSED DISTRIBUTION TRANSFORMERS UPTO AND INCLUDING 2500 kVA, 33kV - SPECIFICATION
2	IS:6600	GUIDE FOR LOADING OF OIL IMMERSED TRANSFORMER
3	IS: 3639	FITTINGS & ACCESSORIES FOR POWER TRANSFORMER
4	IS: 335 IEC: 60296	NEW INSULATING OILS
5	IS: 2099 IEC: 60137	Bushing for alternative voltage above 1000 volts
6	IS: 3347	Dimension for porcelain transformer bushings
7	IS: 2705 IEC: 60185	Current transformers
8	IS: 3637	Gas operated relays
9	IS:1271 IEC: 60216	Classification of insulating material for electrical machinery & apparatus in relation to their thermal stability in service
10	IS/IEC: 60529	Classification of degrees of protection provided by enclosures of electrical equipment
11	IS: 2071 IEC: 60060	Method of high voltage testing
12	IS: 5	Colours for ready mixed paints & enamels
13	NEMA, STANDARD-TR1	Noise level
14	CBIP Publication (latest edition)	Manual on transformers

2.01.00 The equipment shall comply with all currently applicable safety codes and statutory regulations of India as well as of the locality where the equipment is to be installed including Indian Electricity Act, Indian Electricity Rules and Bureau of Indian Standards.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 4 of 30

3.00.00 TECHICAL REQUIREMENTS

- 3.01.00 Technical particulars of transformers are specified in Data Sheet –A of section-I, volume-II.
- 3.02.00 All windings shall be fully insulated. Material of the windings shall be electrolytic grade copper, free from scales and burrs. Winding shall be uniformly insulated.
- 3.03.00 The core shall be constructed from high grade, non-ageing, cold rolled, grain oriented silicon steel laminations.
- 3.04.00 Internal design of transformer shall ensure that air is not trapped in any location.
- 3.05.00 Nuts, bolts and pins used inside the transformer shall be provided with lock washers & locknuts
- 3.06.00 **Tank**
- 3.06.01 Under base of tank shall be fixed type.
- 3.06.02 Tank shall be of welded construction & fabricated from tested quality low carbon steel of adequate thickness. Tank shields, if provided, shall not resonate at natural frequency of equipment.
- 3.06.03 All steel surfaces in contact with insulating oil shall be painted with two coats of heat resistant oil in soluble insulating varnish.
- 3.06.04 Auxiliary transformers shall have suitable bi-directional skids, however auxiliary transformers above 2 MVA shall be provided with four no. of bi-directional detachable flat rollers. Suitable locking arrangement shall be provided to prevent accidental movement of transformer.
- 3.06.05 At least two adequately sized inspection openings, one at the each end of the tank for easy access to bushings and earth connections & suitable manhole shall be provided.
- 3.06.06 The main tank body including tap-changer compartment, radiators and coolers shall be capable of withstanding full vacuum.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 5 of 30

- 3.06.07 All tank and oil filled compartment shall be tested for oil tightness by being completely filled with oil of viscosity not greater than that of specified oil at the ambient temperature and applying pressure equal to the normal pressure plus 35 kN/m² measured at the base of the tank.
- 3.07.00 **Tank mounting**
Tank shall also be provided with lifting lugs and minimum four jacking pads. Rollers shall be provided with holding clamp plates (04 nos), required hardware and foundation bolts etc. for each transformer.
- 3.08.00 **Oil preservation**
Conservator tank of adequate capacity for expansion of oil from minimum ambient to 100 deg. C shall be provided. The transformers rated 6.3MVA and above shall be provided with air bag breathing through silica gel breather. For lower rating transformers with conventional conservator with dry air filling of the space above oil and connected to silica gel breather shall be provided.
- 3.09.00 **Radiators**
The radiators shall be detachable type, mounted on the tank. Each radiator shall be provided with a drain plug/valve at the bottom, an air release plug at the top, shut off valve at each point of connection to the tank.
- 3.10.00 **Insulating Oil**
As per IS: 335. No external inhibitors are permitted.
- 3.11.00 All transformers shall be suitable for cable/ busduct termination as indicated in data sheet-A of section-I, volume-II.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 6 of 30

3.12.00 **Bushings/ Insulators**

3.12.01 The bushings shall conform to the requirements of IS: 2099 and IS: 3347 and shall be of porcelain and above 3150A for the LV bushing Epoxy bushing shall also be acceptable.

3.12.02 For 33kV windings 36kV bushing shall be provided. For 3.3kV, 6.6kV and 11 kV windings, 17.5kV bushing shall be provided. For 415V windings, 1.1kV bushings shall be provided.

3.12.03 The porcelain shall not engage directly with hard metal and, wherever necessary, gaskets shall be interposed between the porcelain and the fitting.

3.12.04 Clamps and fittings of steel or malleable cast iron shall be galvanised.

3.12.05 Where bushing current transformer is provided, the bushing shall be mounted so that it can be removed and replaced without disturbing the current transformers. CTs shall be cast res in type & suitable for operation at ambient temperature existing at its location on the transformer.

3.12.06 Creepage distance shall be as per data sheet-A of section-I, volume-II.

3.12.07 Minimum rated current for bushings shall be as under. However, same shall comply with IS-2099 and HV/LV system fault current mentioned in Clause No. 20.00 of Datasheet A of section-I, volume-II:

- 1) H V Bushing for 33kV
7.5 MVA = 250A
5.0 MVA = 100A
2.0 MVA = 100A
- 2) H V Bushing for 11kV & 6.6kV
10.0MVA= 1000A
8.0MVA = 1000A
7.5MVA = 800A
6.3MVA = 800A
5.0MVA = 630A
3.5MVA = 250A
2.5 MVA = 250A

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 7 of 30

2.0 MVA = 250A

1.6 MVA = 250A

1.0 MVA = 100A

630 kVA = 100A

2) H V Bushing for 3.3kV

2.5 MVA = 630A

2.0 MVA = 500A

1.6 MVA = 400A

1.0 MVA = 250A

630 kVA = 250A

3) L V Bushing for 11kV, 6.6kV & 3.3kV

10.0MVA= 2500A

8.0MVA = 2000A

7.5MVA = 1600A

6.3MVA = 1600A

5.0MVA = 1250A

3.5MVA= 1250A

4) L V Bushing for 433V/420V

2.5 MVA = 4000A

2.0 MVA = 4000A

1.6 MVA = 3150A

1.0 MVA = 2000A

630 kVA = 1000A

3.13.00 **Cable Box**

3.13.01 A dust tight air insulated type cable box with D.O.P. of IP: 55 shall be provided for terminating the cables directly of size and type specified in Data sheet-A of section-I, volume-II. The cable box shall also be provided with a suitable canopy. Suitable cable glands (double compression type) and lugs shall be provided for cable termination.

3.13.02 Dimensions of cable box shall be subject to purchaser's approval.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 8 of 30

- 3.13.03 Inspection cover for fixed portion of cable box shall be provided. Handles for lifting cable box shall be provided.
- 3.13.04 Creepage distance shall be as per data sheet-A of section-I, volume-II.
- 3.13.05 Provision shall be made for earthing the body of each cable box. Separate earthing pads shall be provided for this purpose, suitable for bolted connection to galvanised mild steel flat of size to be specified during contract engineering stage.
- 3.13.06 Gland plate for single core cable termination shall be of Aluminium.
- 3.13.07 Cable box(es) shall be provided with suitable air-insulated disconnecting chamber so that if required, transformer can be removed from its position without disconnecting the cables in the cable box(es). Independent supporting arrangement shall be provided for cable box(es) for this purpose. Supporting arrangement shall be supplied along with required hardware & foundation bolts etc.
- 3.14.00 **Busduct Termination**
- If LV terminals are specified to be connected by means of a busduct, a flanged throat or equivalent connection shall be provided to suit purchaser's busducts. The winding termination shall be on outdoor type of bushing. Necessary flexibles shall be provided by purchaser to connect the bushing terminals to the busbars of the busduct. Details of bus duct shall be furnished during detail engineering stage. Degree of protection of LV busduct flange enclosure shall be IP:55.
- 3.15.00 **Neutral Terminals**
- Two (2) nos. neutral terminals shall be provided on LV side. One neutral terminal shall be part of phase connection arrangement busduct throat/ LV cable-box (as applicable). Other neutral terminal shall be in a separate box and brought to tank bottom by means of earthing bar of 50x6 mm of copper, supported on porcelain insulators mounted on transformer tank. The neutral earthing bar brought to the tank bottom for connection to station earth shall be provided with holes and suitable connecting hardware. This earthing bar shall have fork type arrangement at the end. However neutral may be connected to NGR as per system requirement.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 9 of 30

3.16.00 **Neutral CT**

Bidder to provide neutral bushing CT as per details given in data sheet – A of section-I, volume-II for restricted earth fault protection or standby earth fault protection. In case neutral CT is tank mounted, CT box shall be weather proof having D.O.P. IP: 55. The Neutral CT box shall also be provided with a suitable canopy. CTs shall be cast resin type.

All CTs (except WTI) shall be mounted in the turret of bushings, mounting inside the tank is not permitted.

3.17.00 **Valves**

3.17.01 All valves upto and including 50 mm shall be of gun metal or of cast steel. Larger valves may be of gun metal or may have cast iron bodies with gun metal fittings.

3.17.02 Sampling & drain valves should have zero leakage rate.

3.18.00 **Gaskets**

3.18.01 Gasket shall be fitted with weather proof, hot oil resistant, rubberized cork.

3.18.02 If gasket is compressible, metallic stops shall be provided to prevent over compression.

3.18.03 The gaskets shall not deteriorate during the life of transformer/shunt reactor if not opened for maintenance at site. All joints flanged or welded associated with oil shall be such that no oil leakage or sweating occurs during the life of transformer.

3.19.00 **Voltage control (off circuit type)**

3.19.01 Off circuit tap-changing switch shall be three phase, hand operated, for simultaneous switching of similar taps on all the three phases by operating an external handle/ hand wheel. The position of off-circuit tap switch handle/hand wheel provided outside the transformer tank should be such as to enable an operator standing on ground to operate the same with ease. A caution plate indicating that switch shall be operated only when the transformer is de-energised shall be fitted near tap switch.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 10 of 30

- 3.19.02 Operating mechanism of tap changer shall be suitably labelled to show the direction of operation for raising secondary voltage & vice versa. Position markings shall be provided.
- 3.19.03 Arrangement shall be made for securing and padlocking the tap-changing switch at any working position. It shall not be possible to set and padlock in any intermediate position.
- 3.19.04 Tap position indicator and mechanical stops to prevent over-cranking of the mechanism shall be provided.

3.20.00 Marshalling box

- 3.20.01 Tank mounted vermin and dust proof marshalling box shall be provided to accommodate indication circuits and temperature indicators etc. and provided with proper lighting and thermostatically controlled space heaters.
- 3.20.02 The marshalling box shall be fabricated using sheet steel of at least 2.5mm thickness. The marshalling box shall have domed or sloping roof.
- 3.20.03 Marshalling box shall be complete with all internal wiring and identification ferrules, cables, conduits required for wiring between marshalling box and instruments on transformer. Wiring shall be by 1100 V grade, copper cable of size 2.5mm².
- 3.20.04 The terminal blocks shall be complete with insulating barriers and clip-on type terminals suitable for 2.5mm² stranded copper wire. One dummy terminal block in between each trip wire terminal shall be provided. At least 20% spare terminals shall be provided on each panel. The gasket used shall be of neoprene rubber.
- 3.20.05 The marshalling box shall have IP: 55 degree of protection.
- 3.20.06 CT terminals shall be with shorting and disconnecting facility. TB shall be stud type for all CT & power connection.
- 3.20.07 Wiring scheme shall be engraved in a stainless steel plate with viewable font size and the same shall be fixed inside the Marshalling Box door. Refer annexure-C for standard terminal block numbering.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 11 of 30

3.21.00 **Flux density**

Flux density in any part of the core & yoke on any tap position with $\pm 10\%$ voltage variation from voltage corresponding to the tap shall not exceed 1.9 Wb/m^2 .

Transformer shall also withstand following conditions due to combined voltage and frequency variations:

Continuous operation for 110% flux density

At least 1 minute operation for 125% flux density

At least 5 sec. operation for 140% flux density

3.22.00 **Winding**

For 33kV, 11kV & 3.3kV winding, type of winding shall be continuous disc & for 433V/ 420V winding, type of winding shall be spiral type. The conductors shall be of Electrolytic grade copper.

3.23.00 **Noise & Vibration**

The design and manufacture of transformer, fittings and accessories shall be such as to reduce noise & vibration. Noise level shall not be more than as specified in NEMA Standard Publication TR-1, when measured with transformer energised at normal voltage and frequency.

3.24.00 All transformers and their accessories shall be capable of withstanding without damage any external short circuit at the terminals for duration of two seconds.

3.25.00 Maximum Transformer losses including tolerances shall be as per annexure – B, of section-I, volume-II.

3.26.00 **LOADING CAPABILITY**

Transformer shall be suitable for continuous operation at rated kVA on any tap with voltage variation of $\pm 10\%$ corresponding to voltage of the tap. Short duration overloading shall be in accordance with IS:6600 / IEC60076-7.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 12 of 30

4.00.00 Fittings & accessories

4.01.00 Transformer shall be provided with, but not restricted to following minimum fittings and accessories for satisfactory operation:

4.01.01 Conventional type conservator with drain valve and oil filling hole.

4.01.02 Magnetic oil level gauge with low-level alarm contact.

4.01.03 Prismatic & toughened glass oil level gauge.

4.01.04 Gaskets

4.01.05 Gasket protection covers.

4.01.06 Silica gel breather with oil seal.

4.01.07 Double float type Buchholz relay with alarm and trip contacts with suitable gas collecting device with two shut-off valve on both side.

4.01.08 Diaphragm type explosion vent for transformers of rating less than 2MVA

4.01.09 Pocket on tank cover for thermometer.

4.01.10 Protected type mercury in glass thermometer.

4.01.11 Dial type (150 mm) Oil temperature indicator (OTI) with two sets of electrical potential- free contact rated for 2A, 220V DC, for alarm and trip purpose. The OTI shall be provided with anti-vibration mounting. OTI shall have maximum reading pointer along with resetting device. For remote oil temperature metering, an independent 4-20 mA should be made available.

4.01.12 Dial type (150 mm) Winding temperature indicator (WTI) with two sets of electrical potential- free contact rated for 2A, 220V DC, for alarm and trip purpose. The WTI shall be provided with anti-vibration mounting. WTI shall have maximum reading position along with resetting devices. For remote winding temperature metering, an independent 4-20 mA should be made available.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 13 of 30

- 4.01.13 Drain Valves.
- 4.01.14 Sampling devices.
- 4.01.15 Filter valves.
- 4.01.16 Earthing terminals – 2 Nos.
- 4.01.17 Rating & Diagram plates.
- 4.01.18 Valve schedule plate.
- 4.01.19 Two sets of lifting lugs (one for transformer with oil and other for tank cover).
- 4.01.20 Jacking pads.
- 4.01.21 Skids and pulling eyes on both sides.
- 4.01.22 Air release devices.
- 4.01.23 Inspection cover.
- 4.01.24 Oil filling hole and cap.
- 4.01.25 Tank mounted marshalling box.
- 4.01.26 Detachable, flat, bidirectional rollers with 90 deg. swivel mechanism.
- 4.01.27 Clamping arrangement for rollers.
- 4.01.28 Ground support for cable box.
- 4.01.29 Neutral CT secondary box.
- 4.01.30 Haulage facilities.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 14 of 30

- 4.01.31 Two nos. spring operated pressure relief devices with extension pipe to bring oil to plinth level along with electrically insulated contact for alarm and tripping for transformer rating 2 MVA and above.
- 4.01.32 Gas collection device along with all accessories.
- 4.02.00 Breather shall be fitted at a height not exceeding 1.5 M.
- 4.03.00 Rating and diagram plate shall be fitted at a height of about 1.75 M above the ground level.
- 4.04.00 The WTI and OTI shall have accuracy class of ± 2 deg. C or better.
- 4.05.00 Rating/ Name/ Valve schedule plates shall be of white non-hygroscopic material with engraved black lettering. Such plates shall be bilingual (requirement will be finalised during detailed engineering) with Hindi inscription first, followed by English. Alternatively, two separate plates with Hindi & English inscription shall be provided.

5.00.00 PAINTING

Paint shade shall be informed to successful bidder during detail engineering as applicable for specific project. Adequate quantity of touch up paint shall also be supplied. There shall be no commercial or delivery implication to BHEL on account of paint shade, paint specification/ procedure.

6.00.00 QUALITY ASSURANCE, TESTING & INSPECTION

- 6.01.00 BHEL's Standard QP (PE-QP-999-302-E001 Rev. 0) is enclosed as per Annexure-A of section-II, volume-II for reference. In case bidder has reference QP agreed with ultimate customer, same can be submitted for specific project after award of contract for BHEL/ ultimate customer's approval. There shall be no commercial or delivery implication to BHEL on account of QP approval.
- 6.02.00 All materials, components and accessories of the transformers shall be procured, manufactured, inspected and tested by vendor/ sub-vendor as per approved quality plan.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 15 of 30

- 6.03.00 Tests shall be performed in presence of Purchaser's representative. The bidder shall give at least fifteen (15) days advance notice of date when the tests are to be carried out.
- 6.04.00 All routine and acceptance tests as per relevant standards and specification shall be carried out by the vendor/ sub-vendor on all transformers.
- 6.05.00 Successful bidders shall furnish List of sub-vendors/ makes of items for BHEL/ customer approval at contract stage. This shall not have any commercial implication to BHEL.
- 6.06.00 For acceptance of short circuit reports for tests carried out earlier on similar transformers, successful bidders shall furnish the following documents for BHEL/ BHEL's customer acceptance without any commercial/ delivery implication to BHEL
- 6.06.01 Calculations and design considerations to prove ability to withstand the dynamic effects of short circuit.
- 6.06.02 Short circuit test report of previously tested similar transformer for validation by comparison. Criteria for similarity of transformer for acceptance of Short circuit test report shall be as given in the Annexure-B of IEC-60076-5.
- 7.00.00 COMMISSIONING SPARES, SPECIAL TOOLS & TACKLES AND O & M SPARES**
- 7.01.00 Commissioning spares are those, which may be required during commissioning of the equipment. Bidder to furnish list of commissioning spares along with technical offer as per annexure-IV of section-I, volume-II.
- 7.02.00 The bidder shall supply with the equipment, one unused complete set of all special tools & tackles required for the erection, assembly, disassembly and proper maintenance of the equipment. A list of such tools & tackles (price deemed to be included in the total bid price) shall be submitted by the bidder along with the offer as per annexure-V of section-I, volume-II.
- 7.03.00 O & M spares are those which are required for satisfactory & trouble free operation of equipment. List of O & M spares is enclosed as per Annexure-D of section-II, volume-II. O & M spares shall be quoted (if applicable) as per BOQ-cum-price schedule as part of NIT.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 16 of 30

8.00.00 O & M MANUALS

- 8.01.00 O & M manuals for the installation, operation and maintenance of transformers shall be furnished at least three months before despatch of equipment.
- 8.02.00 Draft manual should first be submitted for purchaser's approval. The manual should contain minimum following details:
 - 8.02.01 General description of equipment.
 - 8.02.02 Approved Technical Data Sheet
 - 8.02.03 All drawings
 - 8.02.04 Salient constructional features.
 - 8.02.05 Technical leaflets of fittings/ important parts.
 - 8.02.06 Type and routine test certificates.
 - 8.02.07 Instructions to be followed on receipt of equipment at site & for storage.
 - 8.02.08 Instructions for foundation arrangement.
 - 8.02.09 Erection procedures and checks.
 - 8.02.10 Pre-commissioning checks.
 - 8.02.11 Commissioning procedures.
 - 8.02.12 Withdrawal arrangement/ material handling instructions.
 - 8.02.13 Operation instructions.
 - 8.02.14 Maintenance instructions.
 - 8.02.15 Trouble-shooting.
 - 8.02.16 Safety instructions.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 17 of 30

ANNEXURE - A

STANDARD QUALITY PLAN

		CUSTOMER :		PROJECT TITLE :		SPECIFICATION NO. :						
		BIDDER/ VENDOR		STANDARD QP NO. : PE-QP-999-302-E001, REV. 0		SPECIFICATION TITLE:						
		SYSTEM		ITEM: OIL FILLED TRANSFORMER		DOC. NO. :						
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	CAT.	TYPE/ METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY			REMARKS
									P	W	V	
1	2	3	4	5	6	7	8	9	10			11
1.0 RAW MATERIALS & BOUGHT OUT ITEMS												
1.1	Mild Steel plate, MS Pipe, Channels, MS Angles	a) Thickness b) Surface defects c) Chemical composition d) Mechanical Properties e) Hydraulic test of pipes	Major Major Major Major	MEASURE VISUAL TEST TEST	10% 100% - -	'MANUF. STD / IS:2062 / IS:1239	'MANUF. STD / IS:2062 / IS:1239	QC Record. QC Record. Suppliers TC Suppliers TC	3/2 3/2 3/2 3/2	1 2 - 2	- - - 2	
1.2	CRGO Steel	a) Thickness Dimension & Finish b) Grade of CRGO c) Cutting & burr d) Scratches, surface finish e) Waviness & edge camber f) Specific core loss g) Surface resistivity h) Stacking factor i) Permeability j) Bend test/ Ductility	Major Major Major Major Major Major Major Major Major Major	MEASURE MEASURE MEASURE VISUAL MEASURE TEST TEST TEST TEST TEST MEASURE	10% - 10% 10% 10% - - - - -	DRG/DATA SHEET/ 'MANUF. STD / IS:3024 / IS:649	DRG/DATA SHEET/ 'MANUF. STD / IS:3024 / IS:649	QC Record. QC Record. QC Record. QC Record. Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC	2 3/2 2 3/2 2 3/2 3/2 3/2 3/2 3/2	1 2 - - 1 2 2 2 2 2 2	2 - - 2 1 2 2 2 2 2 2	
1.3	Paper Insulated Copper Conductor	a) Dimensions b) Resistivity/Conductivity c) Elongation d) Tensile Strength e) Proof stress if applicable f) Insulation test between strands for bunched conductors g) Cu purity of CC rod h) Chemical composition i) Surface Finish	Major Major Major Major Major Major Major Major Major	MEASURE TEST TEST TEST TEST TEST TEST TEST VISUAL	100% 10% - - - - - - 100%	'MANUF. STD / IS:13730-P-27/IEC 60554	'MANUF. STD / IS:13730-P-27/IEC 60554	QC Record. Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Free from sharp edge burr, scratch, cuts etc.	2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 2	1 1 2 2 2 2 2 2 2	2 1 2 2 2 2 2 2 2	
1.4	Insulating Paper	a) Dimensions b) Density & substance c) Tensile Strength d) Elongation e) Water absorption f) Moisture content g) pH value & conductivity aqueous extract h) Ash content i) Electrical strength j) Air permeability k) Tear index l) Heat stability	Major Major Major Major Major Major Major Major Major Major	MEASURE TEST TEST TEST TEST TEST TEST TEST TEST TEST TEST	10% - - - - - - - - - -	'MANUF. STD / IS-9335-P-2/IS-9335-P-III/IEC 60554	'MANUF. STD / IS-9335-P-2/IS-9335-P-III/IEC 60554	QC Record. Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC Suppliers TC	2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2	1 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2	
BHEL		PARTICULARS		BIDDER/VENDOR								
		NAME										
		SIGNATURE										
		DATE										
LEGEND :		1 - BHEL/ CUSTOMER	2 - VENDOR	3 - SUB- VENDOR	P - PERFORM	W - WITNESS	V - VERIFICATION	BIDDERS/VENDORS COMPANY SEAL				

	QUALITY PLAN		CUSTOMER :		PROJECT TITLE :		SPECIFICATION NO. :				
			BIDDER/ : VENDOR		STANDARD QP NO. : PE-QP-999-302-E001, REV.0		SPECIFICATION TITLE:				
	SHEET 2 OF 10		SYSTEM		ITEM :OIL FILLED TRANSFORMER		DOC. NO. :				
SL. NO.	COMPONENT/OPERATION CHARACTERISTIC CHECK	CAT.	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY		REMARKS	
								P	W	V	
1	2	3	4	5	6	7	8	9		10	11
1.5	Insulation & Press-Board moulding (stock items)	a) Dimension b) Compressibility c) Density d) Tensile strength e) pH value/Conductivity of water extract f) Electrical strength in air & oil g) Shrinkage in air h) Flexibility i) Ash content j) Moisture content k) Cohesion between plies l) Elongation m) Oil absorption	Major Major Major Major Major Major Major Major Major Major Major	Measure Test Test Test Test Test Test Test Test Test Test	10% - - - - - - - - - - -	'MANUF. STD / IS:1576	'MANUF. STD / IS:1576 Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC	QC Record. 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2	2 1 2 2 2 2 2 2 2 2 2	1 2 2 2 2 2 2 2 2 2 2	
1.6	Densified wood	a) Dimension b) Surface finish c) Electrical strength in oil d) Oil absorption e) Moisture content f) Compression strength g) Crossbreaking strength h) Tensile strength i) Specific gravity/ Density	Major Major Major Major Major Major Major Major Major Major	Measure Visual Test Test Test Test Test Test Test Test Test	10% 10% - - - - - - - - -	'MANUF. STD / IS:3513	'MANUF. STD / IS:3513 QC Record. QC Record. Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC	QC Record. 2 2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2	2 2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2	1 - 1 - - - - - - - - -	
1.7	Gasket(Rubber Bonded Cork sheet (if applicable)	a) Dimension b) Hardness c) Tensile strength d) Compressibility e) Recovery f) Compression set g) Flexibility h) Fluid resistance test i) Chloride/Sulphate content of water extract j) Density	Major Major Major Major Major Major Major Major Major Major Major	Measure Test Test Test Test Test Test Test Test Test Test Test	10% - - - - - - - - - - -	'MANUF. STD / IS:4253	'MANUF. STD / IS:4253 QC Record. Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC	QC Record. 2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2 3/2	2 - 1 - 1 - - - - - - -	- 1 - - - - - - - - - -	
1.8	Nitinle Rubber Cord and "0" Ring (if applicable)	a) Dimension b) Shore Hardness c) Tensile strength d) Elongation at break e) Compression set f) Accelerated Ageing in oil	Major Major Major Major Major Major Major	MEASURE Test Test Test Test Test Test	10% - - - - - -	'MANUF. STD / IS:4253	'MANUF. STD / IS:4253 Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC	Supplier's TC 2 3/2 3/2 3/2 3/2 3/2	2 - - - - - -	- - - - - - -	
		PARTICULARS		BIDDER/VENDOR							
BHEL		NAME									
		SIGNATURE									
		DATE									
LEGEND :		1 - BHEL/ CUSTOMER	2 - VENDOR	3 - SUB- VENDOR	P - PERFORM	W - WITNESS	V - VERIFICATION	BIDDERS/VENDORS COMPANY SEAL			

QUALITY PLAN			CUSTOMER :		PROJECT TITLE :		SPECIFICATION NO. :				
BIDDER/ VENDOR			STANDARD QP NO. : PE-QP-999-302-E001, REV. 0		SPECIFICATION TITLE:						
SHEET 4 OF 10			SYSTEM		ITEM :OIL FILLED TRANSFORMER		DOC. NO. :				
SL. NO.	COMPONENT/OPERATION CHARACTERISTIC CHECK	CAT.	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY	REMARKS		
								P	W	V	
1	2	3	4	5	6	7	8	9	10		11
2.3	Bucholz Relay	a) Type, size & make b) Continuity for alarm & trip (Performance) c) Porosity test d) High voltage & IR test e) Element test f) Gas volume test g) Loss of oil & surge test	Major Major Major Major Major Major Major	Visual Test Test Test Test Test Test	100% - - - - - -	MANUFUF. STD./ IS:3637	MANUFUF. STD./ IS:3637	QC records Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC	2 3/2 3/2 3/2 3/2 3/2 3/2	1 2 2 2 2 2,1 2,1	
2.4	Pressure Relief Device	a) Type, size & make b) Operation (Pressure & flag indication) c) HV Test d) Switch contact operation	Major Major Major Major	Visual Test Test Test	100% - - -	MANUFUF. STD./ IS:3637	MANUFUF. STD./ IS:3637	QC records Supplier's TC Supplier's TC Supplier's TC	2 3/2 3/2 3/2	1 2,1 2,1 2	
2.5	Magnetic Oil Level Gauge (MOG)	a) Type, size & make b) Dial marking c) Switch continuity d) HV test e) Operation test	Major Major Major Major Major	Visual Visual Test Test Test	100% - - - -	MANUFUF. STD/ IS:3637	MANUFUF. STD./ IS:3637	QC records Supplier's TC Supplier's TC Supplier's TC Supplier's TC	2 3/2 3/2 3/2 3/2	1 2 2 2 2	
2.6	Off-Circuit Tap Changer/Switch (if applicable)	a) Dimensions b) Physical condition c) operation of switch d) Insulation resistance test e) Leak test of handle stuffing box f) Milli volt drop test	Major Major Major Major Major Major	Measure Visual Test Test Test Test	100% 100% - - - -	MANUFUF. STD/ IS:3637	MANUFUF. STD/ IS:3637	QC records QC records QC records Supplier's TC Supplier's TC Supplier's TC	2 2 2 3/2 3/2 3/2	- - - 2 2 2	
2.7	On load Tap Changer (if applicable)	a) Visual check b) Dimensional check c) Mechanical operation on Diverter & Selector switch, 4000 switching oper. (Min) d) HV test on Auxiliary circuit e) Sequence test f) Pressure test of diverter switch compartment with oil g) Mechanical test of Tap selector with motor drive 500 satisfactory opm(in all) from one extreme position to the other in air h) Opm test of complete tapchanger i) Aux. ckt. HV test at 2 KV for 1 min.	Major Major Major Major Major Major Major Major Major	Visual Measure Verify Test Test Test Test Test	100% 100% - - - - - -	IS:8468/IEC 60214	IS:8468/IEC 60214	QC records Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC	2 2 3/2 3/2 3/2 3/2 3/2	- - 2 2,1 2,1 2,1 2,1	
BHEL		PARTICULARS		BIDDER/VENDOR							
		NAME									
		SIGNATURE									
		DATE									
LEGEND :		1 - BHEL/ CUSTOMER	2 - VENDOR	3 - SUB- VENDOR	P - PERFORM	W - WITNESS	V - VERIFICATION	BIDDERS/VENDORS COMPANY SEAL			

		CUSTOMER :	PROJECT TITLE :		SPECIFICATION NO. :							
		BIDDER/ VENDOR	STANDARD QP NO. : PE-QP-999-302-E001, REV. 0		SPECIFICATION TITLE:							
			ITEM -OIL FILLED TRANSFORMER									
SL. NO.	COMPONENT/OPERATION/CHARACTERISTIC CHECK	CAT.	TYPE/ METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY		REMARKS		
								P	W	V		
1	2	3	4	5	6	7	8	9	10		11	
2.8	Gun Metal / Cast Iron Valves Gate(globe/ Butterfly)	a) Dimensional check b) Type, size & make c) Leakage test(Hydraulic test for Body & Seat) d) Operational test (close & open)	Major Major Major Major	Measure Visual Test Test Measure/Visual test	100% 100% - - 100%	Manf. Std./IS:778 Class 1	Manf. Std./IS:778 Class 1	QC Record QC Record Supplier's TC Supplier's TC	2 2 3/2 3/2	- - 2,1 2		
2.9	Bushing CT	a) Visual check/Dimensional check b) Routin test	Major Major	Test Test	- -	Manf. Std./IS:2705	Manf. Std./IS:2705	Supplier's TC Supplier's TC	2 3/2	- 2,1		
2.10	Marshaling box/RTCC	a) Visual check for wiring b) Dimensional check c) Check for make of components d) 2 KV insulation test on auxiliary wiring e) Check for paint, shade & thickness f) Degree of Prot. By paper insertion	Major Major Major Major Major Major	Test Measure/Test Measure/Test Measure/Test Measure/Test Visual	100% 100% 100% 100% 100% 100%	Drg./Manf. Std./IS:5/IS:13947	Drg./Manf. Std./IS:5/IS:13947	Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC Supplier's TC	3/2 3/2 3/2 3/2 3/2 3/2	2 2 2 2 2 2		
2.11	OTI&WTI	a) Type size & make b) HV test C) Temperature calibration d) Switch setting & switch deferential e) Calibration & operation of switch	Major Major Major Major	Visual Test Test Test	100% - - -	Manf. Std.	Manf. Std.	QC records Supplier's TC Supplier's TC Supplier's TC	2 3/2 3/2 3/2	1 2,1 2,1 2,1		
2.12	Radiator	a) Type, Model, Rating b) Dimensions & No. of elements c) Paint shade, Finish & flim thickness d) Pressure test e) Adhesion test on paint f) Welding quality	Major Major Major Major Major	Visual Measure Measure/test Test Test Visual/ DPTest	100% 100% 100% 100% 100% 100%	Drg./Manf. Std./IS:101	Drg./Manf. Std./IS:101	QC records QC records QC records Supplier's TC Supplier's TC	3/2 3/2 3/2 3/2 3/2	2 2 2 2 2	1 - - 1 1	
2.13	Hardware	a) Dimensional check b) Tensile strength	Major Major	Measure Test	100% -	Relevant code Manf. Std.	Relevant code Manf. Std.	Supplier's TC Supplier's TC	3/2 3/2	2 -	1 -	
		BIDDER/VENDOR										
		PARTICULARS										
BHEL		NAME										
		SIGNATURE										
		DATE										
LEGEND :		1 - BHEL/ CUSTOMER	2 - VENDOR	3 - SUB- VENDOR	P - PERFORM	W - WITNESS	V - VERIFICATION	BIDDER'S/VENDORS COMPANY SEAL				

		CUSTOMER :		PROJECT TITLE :			SPECIFICATION NO. :		
		QUALITY PLAN		BIDDER/ VENDOR			SPECIFICATION TITLE:		
		SHEET 6 OF 10		SYSTEM			DOC. NO. :		
SL. NO.	COMPONENT/OPERATION CHARACTERISTIC CHECK	CAT.	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY	REMARKS
								P W V	
1	2	3	4	5	6	7	8	9	10 11
2.14	Oil Pump Motor set (if applicable)	a) Type, Model, Rating b) Dimensional check c) Hv test at 2 kV for one minute d) Input power taken by pump e) Performance test (I/P, O/P DISCH, NO LOAD, Locked Rotor te)	Major Major Major Major Major	Visual Measure Test Test Test	100% 100% - -	Manf. Std.	QC records QC records Supplier's TC Supplier's TC Supplier's TC	2 2 3/2 3/2 3/2	- - 2.1 2.1 2.1
2.15	Cooling Fan (if applicable)	a) Type, Model, Rating b) Dimensional check c) HV test at 2 KV for one minute d) IR test e) Power consumption & RPM	Major Major Major Major Major	Visual Measure Test Test Test Test	100% - - - -	Approved drgs./docs/spec./ IS:2312	QC records QC records Supplier's TC Supplier's TC Supplier's TC	2 2 3/2 3/2 3/2	- - 2.1 - 2.1
2.16	Roller Assembly	a) Dimensions b) Mechanical & Chemical properties of Raw material used for Shaft & Roller	Major Major	Measure Measure	100% -	Manf. Drg./docs	QC records Supplier's TC	2 3/2	- 2
2.17	Terminal Connector (if applicable)	a) Dimensional check b) Surface finish c) Acceptance test	Major Major Major	Measure Visual Test	100% -	Manf. Drg./docs/IS:5561	QC records Supplier's TC Supplier's TC	2 3/2 3/2	- 2 2.1
2.18	Air Cell for Conservator (if applicable)	a) Dimensional check b) Surface finish c) Acceptance test	Major Major Major	Measure Visual Test	100% 100% 100%	Manf. Drg./docs/PO	QC records Supplier's TC Supplier's TC	2 3/2 3/2	- 2 2.1
2.19	Oil Flow Indicator (if applicable)	a) Type, Model, Rating b) Dimensional check c) Functional test	Major Major Major	Visual Measure Test	100% 100% -	Manf. Drg./docs/Spec.	QC records QC records Supplier's TC	2 2 3/2	- - 2.1
2.20	Silicagel Breather	a) Type, Size, Model b) Pressure/ Leakage test c) Colour of silica gel	Major Major Major	Visual Test Visual	100% -	Manf. Drg./docs/Spec.	QC records Supplier's TC Supplier's TC	2 3/2 3/2	- 2 2.1
BIDDER/VENDOR									
PARTICULARS									
NAME									
SIGNATURE									
DATE									
BHEL									
BIDDERS/VENDORS COMPANY SEAL									
LEGEND : 1 - BHEL/ CUSTOMER 2 - VENDOR 3 - SUB- VENDOR P - PERFORM W - WITNESS V - VERIFICATION									

BHEL		CUSTOMER :		PROJECT TITLE :		SPECIFICATION NO. :						
		QUALITY PLAN		BIDDER/ VENDOR :		STANDARD QP NO. : PE-QP-999-302-E001, REV. 0						
		SHEET 7 OF 10		SYSTEM		ITEM -OIL FILLED TRANSFORMER						
SL. NO.	COMPONENT/OPERATION	CHARACTERISTIC CHECK	CAT.	TYPE/ METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY		REMARKS	
									P	W	V	
1	2	3	4	5	6	7	8	9	10		11	
3	IN-PROCESS											
3.1	Fabrication of Tank, Conservator,Radiator, HV&LV CABLE BOX and welding requirement	a) Welding procedure specification	Major	Verify/Review	100%			QC Records	3/2	2		
		b) Process qualification record	Major	Verify/Review	100%			QC Records	3/2	2		
		c) Welder qualification	Major	Verify/Review	100%			QC Records	3/2	2		
		d) Welding electrodes-Mechanical Properties	Major	Verify/Review	100%			QC Records	3/2	2		
		e) Fitup for butt weld joints of tank and cover	Major	Visual	100%			QC Records	3/2	2		
		f) Visual check on weldment & any foreign particle in the entire tank with conservator, pipes etc.and blanking of ends with bolted plates	Major	Visual	100%			QC Records	3/2	2		
		g) Dimensional check after final welding incl.foundation dimension-HV & LV cable box/ Radiator/ Cooler/ Pipes	Major	Measure	100%	Manf. Drg./stand.	Manf. Drg./stand.	QC Records	3/2	2		
		h) DP test on welded joints	Major	Test	100%			QC Records	3/2	2.1		
		i) Check for flatness gasket surface	Major	Visual	100%			QC Records	3/2	2.1		
		J) Rim flatness	Major	Measure	100%			QC Records	3/2	2.1		
		k) Surface cleaning by sand/shot blasting	Major	Visual	100%			QC Records	3/2	2.1		
		l) Primer coating, paint shade thickness inside & outside	Major	Measure	100%			QC Records	3/2	2.1		
		m) Paint film adhesion test	Major	Test	100%			QC Records	3/2	2.1		
	n) Vacuum Test (Tank)	CR	Vacuum test	1 unit each type	Appd. Doc./BHEL SPEC./CBIP	Appd. Doc./BHEL SPEC./CBIP	QC format	3/2	1			
3.2	Core Stamping	a) Burr & Bow	Major	Pressure test	1 unit each type	Manf. Drg./stand.	Manf. Drg./stand.	QC format	3/2	1		
		b) Dimensional check	Major	Visual	100%			QC Records	2	-		
3.3	Core Building	a) Dimensional check	Major	Measure	100%			QC Records	2	-		
		b) Assembly of limb insulation and limb plates.	Major	Visual	100%			QC Records	2	-		
		c) Rectangularity of core assembly	Major	Visual	100%			QC Records	2	-		
		d) Freedom from overlaps & air gap at joints	Major	Visual	100%	Manf. Drg./stand.	Manf. Drg./stand.	QC Records	2	-		
		e) Leaning of cor(Le core vertically)	Major	Visual	100%			QC Records	2	-		
		f) Limb & stack thickness	Major	Visual	100%			QC Records	2	-		
		g) Limb clamping & binding	Major	Visual	100%			QC Records	2	-		
		h) Core diameter	Major	Visual	100%			QC Records	2	1		
		i) Earthing of core	Major	Visual	100%			QC Records	2	1		
PARTICULARS												
BIDDER/VENDOR												
BHEL												
NAME												
SIGNATURE												
DATE												
BIDDERS/VENDORS COMPANY SEAL												
LEGEND :												
1 - BHEL/ CUSTOMER			2 - VENDOR		3 - SUB- VENDOR		P - PERFORM		W - WITNESS		V - VERIFICATION	

PROJECT TITLE :			CUSTOMER :			SPECIFICATION NO. :		
STANDARD QP NO. : PE-QP-999-302-E001, REV. 0			SPECIFICATION TITLE:					
ITEM -OIL FILLED TRANSFORMER			DOC. NO. :					
REFERENCE DOCUMENT			ACCEPTANCE NORM			FORMAT OF RECORD		
P			W			V		
10			11					
1			2			3		
4			5			6		
7			8			9		
10			11					
12			13			14		
15			16			17		
18			19			20		
21			22			23		
24			25			26		
27			28			29		
30			31			32		
33			34			35		
36			37			38		
39			40			41		
42			43			44		
45			46			47		
48			49			50		
51			52			53		
54			55			56		
57			58			59		
60			61			62		
63			64			65		
66			67			68		
69			70			71		
72			73			74		
75			76			77		
78			79			80		
81			82			83		
84			85			86		
87			88			89		
90			91			92		
93			94			95		
96			97			98		
99			100			101		
102			103			104		
105			106			107		
108			109			110		
111			112			113		
114			115			116		
117			118			119		
120			121			122		
123			124			125		
126			127			128		
129			130			131		
132			133			134		
135			136			137		
138			139			140		
141			142			143		
144			145			146		
147			148			149		
150			151			152		
153			154			155		
156			157			158		
159			160			161		
162			163			164		
165			166			167		
168			169			170		
171			172			173		
174			175			176		
177			178			179		
180			181			182		
183			184			185		
186			187			188		
189			190			191		
192			193			194		
195			196			197		
198			199			200		
201			202			203		
204			205			206		
207			208			209		
210			211			212		
213			214			215		
216			217			218		
219			220			221		
222			223			224		
225			226			227		
228			229			230		
231			232			233		
234			235			236		
237			238			239		
240			241			242		
243			244			245		
246			247			248		
249			250			251		
252			253			254		
255			256			257		
258			259			260		
261			262			263		
264			265			266		
267			268			269		
270			271			272		
273			274			275		
276			277			278		
279			280			281		
282			283			284		
285			286			287		
288			289			290		
291			292			293		
294			295			296		
297			298			299		
300			301			302		
303			304			305		
306			307			308		
309			310			311		
312			313			314		
315			316			317		
318			319			320		
321			322			323		
324			325			326		
327			328			329		
330			331			332		
333			334			335		
336			337			338		
339			340			341		
342			343			344		
345			346			347		
348			349			350		
351			352			353		
354			355			356		
357			358			359		
360			361			362		
363			364			365		
366			367			368		
369			370			371		
372			373			374		
375			376			377		
378			379			380		
381			382			383		
384			385			386		
387			388			389		
390			391			392		
393			394			395		
396			397			398		
399			400			401		
402			403			404		
405			406			407		
408			409			410		
411			412			413		
414			415			416		
417			418			419		
420			421			422		
423			424			425		
426			427			428		
429			430			431		
432			433			434		
435			436			437		
438			439			440		
441			442			443		
444			445			446		
447			448			449		
450			451			452		
453			454			455		
456			457			458		
459			460			461		
462			463			464		
465			466			467		
468			469			470		
471			472			473		
474			475			476		
477			478			479		
480			481			482		
483			484			485		
486			487			488		
489			490			491		
492			493			494		
495			496			497		
498			499			500		
501			502			503		
504			505			506		
507			508			509		
510			511			512		
513			514			515		
516			517			518		
519			520			521		
522			523			524		
525			526			527		
528			529			530		
531			532			533		
534			535			536		
537			538			539		
540			541			542		
543			544			545		
546			547			548		
549			550			551		
552			553			554		
555			556			557		
558			559			560		
561			562			563		
564			565			566		
567			568			569		
570			571			572		
573			574			575		
576			577			578		
579			580			581		
582			583			584		
585			586			587		
588			589			590		
591			592			593		
594			595			596		
597			598			599		
600			601			602		
603			604			605		
606			607			608		
609			610			611		
612			613			614		
615			616			617		
618			619			620		
621			622			623		
624			625			626		
627			628			629		
630			631			632		
633			634			635		
636			637			638		
639			640			641		
642			643			644		
645			646			647		
648			649			650		
651			652			653		
654			655			656		
657			658			659		
660			661			662		
663			664			665		
666			667			668		
669			670			671		
672			673			674		
675			676			677		
678			679			680		
681			682			683		
684			685			686		
687			688			689		
690			691			692		
693			694			695		
696			697			698		
699			700			701		
702			703			704		
705			706			707		
708			709			710		
711			712			713		
714			715			716		
717			718			719		
720			721			722		
723			724			725		
726			727			728		
729			730			731		
732			733			734		
735			736			737		
738			739			740		
741			742			743		
744			745			746		
747			748			749		
750			751			752		
753			754			755		
756			757			758		
759			760			761		
762			763			764		
765			766			767		
768			769			770		
771			772			773		
774			775			776		
777			778			779		
780			781			782		
783			784			785		
786			787			788		
789			790			791		
792			793			794		
795			796			797		
798			799			800		
801			802			803		
804			805			806		
807			808			809		
810			811			812		
813			814			815		
816			817			818		
819			820			821		
822			823			824		
825			826			827		
828			829			830		
831			832			833		
834			835			836		
837			838			839		
840			841			842		
843			844			845		
846			847			848		
849			850			851		
852			853			854		
855			856			857		
858			859			860		
861			862			863		
864			865			866		
867			868			869		
870			871			872		
873			874			875		
876			877			878		
879			880			881		
882			883			884		
885			886			887		
888			889			890		
891			892			893		
894			895			896		
897			898			899		
900			901			902		
903			904			905		
906			907			908		
909			910			911		
912			913			914		
915			916			917		
918			919			920		
921			922			923		
924			925			926		
927			928			929		
930			931			932		
933			934			935		
936			937			938		
939			940			941		
942			943			944		
945			946			947		
948			949			950		
951			952			953		
954			955			956		
957			958			959		
960			961			962		
963			964			965		
966			967			968		
969			970			971		
972			973			974		
975			976			977		
978			979			980		
981			982			983		
984			985			986		
987			988			989		
990			991			992		
993								

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 28 of 30

ANNEXURE - B

TRANSFORMER LOSSES

- The No-Load and Load losses for transformers 2.0MVA & above and voltage ratio 33kV/6.9kV, 33kV/3.5kV, 11kV/6.9kV, 11kV/3.5kV, 6.6kV/3.5kV are given below:

Ratings	Maximum No-Load losses at rated frequency and 100%voltage	Maximum Load losses at normal ratio, rated current and 75 deg. C
<u>10.0 MVA</u>	9.0kW	72.0kW
<u>8.0MVA</u>	7.5 kW	57.0kW
<u>7.5 MVA</u>	7.2 kW	50.0kW
<u>6.3MVA</u>	6.5kW	45.0kW
<u>5.0MVA</u>	5.5kW	36.0kW
<u>3.5MVA</u>	4.5kW	32.0kW
<u>2.5 MVA</u>	2.8kW	30.0kW
<u>2.0MVA</u>	2.4 kW	24.0kW

The above indicated maximum No-Load and Load losses are inclusive of permissible tolerance as per IS-2026. Further tolerance on maximum losses is not permissible.

- Transformers of rating 2.5MVA & below and voltage ratio 33kV/433V, 11kV/433V, 6.6kV/433V, 3.3kV/433V shall have STAR-1 as per BEE. However, percent impedance shall be as per Data Sheet-A of section-I, volume-II of technical specification.

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 29 of 30

ANNEXURE – C

Terminal No.	Description	Remarks	Notes:
T-01	230V, Single Phase, 50Hz, AC		1). The Terminals from T-01 to T-48 shall be designated as indicated in the chart for all outdoor transformers (ONAN cooling).
T-02	Supply		
T-03	MOG (Oil Level) Alarm		
T-04			2). The Terminals which are not used for a particular Transformer shall be left as spare. e.g. in case there is only one WTI alarm & trip, then terminals T-25 to T-28 & T-38 to T-40 shall be left as spare terminals.
T-05	Buchholz Relay Alarm		
T-06			
T-07	Buchholz Relay Trip		3). Provide 20% spare TBs.
T-08			
T-09	PRV-1 Alarm		
T-10			If applicable
T-11	PRV-1 Trip		
T-12			
T-13	PRV-2 Alarm		If applicable
T-14			
T-15	PRV-2 Trip		
T-16			If applicable
T-17	OTI Alarm		
T-18			
T-19	OTI Trip		If applicable
T-20			
T-21	WTI-1 Alarm		
T-22			If applicable
T-23	WTI-1 Trip		
T-24			
T-25 to T-28	SPARE	If applicable	If applicable
T-29	4-20 mA for OTI (DDCMIS)		
T-30	4-20 mA for OTI (SCADA)		
T-31			If applicable
T-32	4-20 mA for WTI-HV (DDCMIS)		
T-33	4-20 mA for WTI-HV (SCADA)		
T-34			If applicable
T-35			
T-36			
T-37 to T-50	SPARE		If applicable
T-51	WTI 1-CT		
T-52	CT Shorting Terminal		
T-53			If applicable
T-54	WTI 2-CT		
T-55	CT Shorting Terminal		
T-56			If applicable
T-57	LV Neutral CT (REF Protection)		
T-58	CT Shorting Terminal		
T-59			If applicable
T-60	LV Neutral CT (E/F Protection)		
T-61	CT Shorting Terminal		
T-62			If applicable
T-63	HV Neutral CT (REF Protection)		
T-64	CT Shorting Terminal		
T-65			If applicable
T-66	HV U-PHASE CT		
T-67	CT Shorting Terminal		
T-68			If applicable
T-69	HV V-PHASE CT		
T-70	CT Shorting Terminal		
T-71			If applicable
T-72	HV W-PHASE CT		
T-73	CT Shorting Terminal		
T-74			If applicable
T-75 to T-80	SPARE TBs (for CT)		

	TITLE : STANDARD TECHNICAL SPECIFICATION FOR OIL FILLED SERVICE TRANSFORMERS	SPECIFICATION NO. PE-SS-999-302-E001
		VOLUME NO. : II
		SECTION : II
		REV NO. : 00 DATE : 30/06/2016
		SHEET : 30 of 30

ANNEXURE – D

LIST OF O & M SPARES

S. NO.	DESCRIPTION	QTY
1	HV bushing with metal parts & gaskets	1 no. for each rating
2	LV bushing with metal parts & gaskets	1 no. for each rating
3	WTI with alarm & trip contacts	1 no.
4	OTI with alarm & trip contacts	1 no.
5	Magnetic oil level gauge	1 no.
6	Diaphragm of explosion vent	1 no.
7	Buchholz relay	1 no.
8	Silica gel charge	Three charge
9	Floats with contacts for Buchholz relay	1 set
10	Set of gaskets	2 sets
11	Set of valves (1 no. of each size & Type)	1 set
12	Set of windings for one limb in a suitable oil container (container shall be completely filled with transformer oil)	1 no. of each rating & type of transformer.
13	Contact for tap changer	1 set
14	Pressure relief device for 2MVA & above transformers	1 no.
15	Hydraulic/ screw Jacks	4 no.
16	Any other item considered essential by the bidder	

Note:

- 1) Wherever set is indicated above, it means the total parts/ accessories required to replace the particular item for a given equipment
- 2) O & M spares shall be supplied along with transformers and packed separately with proper inscription.