



BHARAT HEAVY ELECTRICALS LIMITED

TRANSMISSION PROJECTS ENGINEERING MANAGEMENT

COPYRIGHT AND CONFIDENTIALITY
The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD.
It must not be used directly or indirectly in anyway detrimental to the interest of the company

DOCUMENT No.	TB-408-510-301	Rev. No.	00		Prepared	Checked	Approved
TYPE OF DOC.	TECHNICAL SPECIFICATION			NAME	NT/AA	SKS	SKS
TITLE BAY MARSHALLING KIOSK & JUNCTION BOX				SIGN			
				DATE	06-11-19	06-11-19	06-11-19
				GROUP	TBEM	W.O. No	
CUSTOMER	PGCIL						
PROJECTS	Extension of 765kV Solapur, 765kV Aurangabad, 765kV Wardha, 400kV Khandwa, 400kV Rajgarh, 400kV Champa, 400/220kV Itarsi & 400/220kV Jabalpur substations						

CONTENTS

Section	Description	No. of Sheets
1.	SCOPE, SPECIFIC TECHNICAL REQUIREMENTS & BILL OF QUANTITIES Annexure-A: Technical PQR	05
2.	DETAILED TECHNICAL REQUIREMENTS – EQUIPMENT SPECIFICATION ANNEXURES	09 03
3.	PROJECT DETAILS AND GENERAL SPECIFICATION	39
4.	SCHEDULE OF GUARANTEED TECHNICAL PARTICULARS (TO BE SUBMITTED AT CONTRACT STAGE)	02
5	CHECK LIST (TO BE FILLED AT TENDER STAGE)	6

Rev No.	Date	Altered	Checked	Approved	REVISION DETAILS				
				Distribution	TBMM	TBQM	TBCM	TBTS	
				Copies	2	-	-	-	

SECTION 1

SCOPE, SPECIFIC TECHNICAL REQUIREMENTS & QUANTITIES

1.1 SCOPE

This technical specification covers the requirement of design, manufacture, testing at works, packing and dispatch of Marshalling Kiosk & Junction Box complete with accessories. In case of any conflict between the technical details mentioned in this section and the remaining sections of this document, then Section-1 shall prevail and is to be considered as binding requirement.

1.2 THE EQUIPMENT IS REQUIRED FOR THE FOLLOWING PROJECT.

The equipment is required for the following Projects.

Name of Customer : Power Grid Corporation of India Ltd.

Name of the Projects : Substation package-SS19

- 1) Extension of 765kV Solapur substation
- 2) Extension of 765kV Aurangabad substation
- 3) Extension of 765kV Wardha substation
- 4) Extension of 400kV Khandwa substation
- 5) Extension of 400kV Rajgarh substation
- 6) Extension of 400kV Champa substation
- 7) Extension of 400/220kV Itarsi substation
- 8) Extension of 400/220kV Jabalpur substation

1.3 PROJECT WISE BILL OF QUANTITY:

I) Extension of 765kV Solapur substation

S.No	Description	Unit	Qty 765kV Yard	Total Qty
1	Bay Marshalling Kiosk : MK-SAS	No.	1	1
2	CT Junction Box : JB D-180	No.	1	1

Note : The offered Bay MK & Junction Box shall include all accessories like fixing hardware / foundation bolts etc.

II) Extension of 765kV Aurangabad substation

S.No	Description	Unit	Qty 765kV Yard	Total Qty
1	Bay Marshalling Kiosk : MK-SAS	No.	1	1
2	CT Junction Box : JB D-180	No.	1	1

Note : The offered Bay MK & Junction Box shall include all accessories like fixing hardware / foundation bolts etc.

III) Extension of 765kV Wardha substation

S.No	Description	Unit	Qty 765kV Yard	Total Qty
1	Bay Marshalling Kiosk : MK-SAS	No.	1	1

Extension of 765kV Solapur, 765kV Aurangabad, 765kV Wardha, 400kV Khandwa, 400kV Rajgarh, 400kV Champa, 400/220kV Itarsi & 400/220kV Jabalpur substations

Bharat Heavy Electricals Ltd

Bay Marshalling Kiosk & Junction Box

Doc. No. TB/SPEC/JB-MK/510/01, Rev. No.-00

2	CT Junction Box : JB D-180	No.	1	1
---	----------------------------	-----	---	---

Note : The offered Bay MK & Junction Box shall include all accessories like fixing hardware / foundation bolts etc.

IV) Extension of 400kV Khandwa substation

S.No	Description	Unit	Qty 765kV Yard	Total Qty
1	Bay Marshalling Kiosk : MK-200	No.	1	1
2	CT Junction Box : JB D-180	No.	1	1

Note : The offered Bay MK & Junction Box shall include all accessories like fixing hardware / foundation bolts etc.

V) Extension of 400kV Rajgarh substation

S.No	Description	Unit	Qty 765kV Yard	Total Qty
1	Bay Marshalling Kiosk : MK-SAS	No.	1	1
2	CT Junction Box : JB D-180	No.	1	1

Note : The offered Bay MK & Junction Box shall include all accessories like fixing hardware / foundation bolts etc.

VI) Extension of 400kV Champa substation

S.No	Description	Unit	Qty 765kV Yard	Total Qty
1	Bay Marshalling Kiosk : MK-SAS	No.	1	1
2	CT Junction Box : JB D-180	No.	1	1

Note : The offered Bay MK & Junction Box shall include all accessories like fixing hardware / foundation bolts etc.

VII) Extension of 400/220kV Itarsi substation

S.No	Description	Unit	Qty 765kV Yard	Total Qty
1	Bay Marshalling Kiosk : MK-SAS	No.	2	2
2	CT Junction Box : JB D-130	No.	1	1

Note : The offered Bay MK & Junction Box shall include all accessories like fixing hardware / foundation bolts etc.

VIII) Extension of 400/220kV Jabalpur substation

S.No	Description	Unit	Qty 765kV Yard	Total Qty
1	Bay Marshalling Kiosk : MK-200	No.	3	3
2	CT Junction Box : JB D-180	No.	2	2
3	CT Junction Box : JB D-130	No.	1	1

Note : The offered Bay MK & Junction Box shall include all accessories like fixing hardware / foundation bolts etc.

The offered Marshalling box and junction box shall be as per Powergrid approved standard drawings.

1.4 SPECIFIC TECHNICAL REQUIREMENTS :

a) Bay Marshalling Kiosk

- i) Bay Marshalling kiosks shall be fabricated from stainless steel.
#
- ii) The bay marshalling kiosk shall have two distinct compartments for following purpose-

SN	Type of Feeder	No.of Feeders	Voltage & Phase	Current rating	Controlled by
1.	Incoming	2	415V, 3Ø	63A	MCB
2.	Outgoing	9	415V, 3Ø	16A	MCB
3.	Outgoing	2	240V, 1Ø	63A	MCB
4.	Outgoing	10	240V, 1Ø	10A	MCB

The incomer feeders shall be with auto-changeover and a selector switch need to be provided for selecting the default Incomer out of the two incomers.

- iii) The kiosks shall be provided with danger plate and a diagram showing the numbering/connection/ferruling by pasting the same on the inside of the door.
- iv) The following routine tests along with the routine tests as per IS:5039 shall also be conducted :
 - check for wiring
 - visual and dimension check
- v) The enclosure of Kiosk , Junction Box shall conform to IP-55 as per IS-13947 including the application of 2kV rms for 1 (one) minute , insulation resistance and functional test after IP-55 test.

b) Junction Box

- i) The terminal blocks shall be disconnecting stud type.
- ii) The wiring diagram plate for the interconnections of the three single phase CTs and VTs shall be provided inside the respective CT & VT Junction box. Please refer Section-II , Annexure A for a typical wiring diagram and terminal arrangement.

1.5 TYPE TESTING, INSPECTION, TESTING & INSPECTION CERTIFICATE

- i. All equipment being supplied shall conform to type tests as per technical Specification and shall be subject to routine tests in accordance with requirements Stipulated under respective sections.
- ii. The reports for all type tests as per technical specification shall be furnished by the Contractor along with equipment / material drawings. However, type test reports of similar equipments/ material already accepted in POWERGRID shall be applicable for all project with similar requirement. The type tests conducted earlier should have either been

conducted in accredited laboratory (accredited based on ISO / IEC Guide 25 / 17025 or EN 45001 by the national accreditation body of the country where laboratory is located) or witnessed by POWERGRID or representative authorized by POWERGRID or Utility or representative of accredited test lab or reputed consultant.

- iii. Unless otherwise specified elsewhere, the type test reports submitted shall be of the tests conducted within last 10 (ten) years from the date of NOA*. In case the test reports are of the test conducted earlier than 10 (ten) years from the date of NOA, the contractor shall repeat these test(s) at no extra cost to the Employer. Further, in the event of any discrepancy in the test reports i.e. any test report not acceptable due to any design/ manufacturing changes or due to non-compliance with the requirement stipulated in the Technical Specification or any/all type tests not carried out, same shall be carried out without any additional cost implication to the Employer.

*NOA is 29.07.2019.

TECHNICAL QUALIFYING REQUIREMENTS

For Marshalling Kiosks and Junction Boxes

The manufacturer shall meet the following technical requirement as stipulated here-

1. The Bidder should have manufactured Marshalling Kiosks and Junction Boxes and have supplied to the customers/utilities as on the date of NOA*.

Along with the offer, Bidder to provide necessary documents like, PO copies, LR copies, etc. in support of the TQR mentioned at point no. 1 above.

* NOA stands for Notification of Award issued by Powergrid to BHEL for referenced project. Date of NOA is 29/07/2019.


Prepared


Checked


Approved 06/07/20

SECTION-2

MARSHALLING KIOSK

2.0 SCOPE

This technical specification covers the requirements of design, manufacture, testing at works, packing and despatch of MARSHALLING KIOSKS. No deviation from the requirements specified in various clauses of this specification shall be allowed.

2.1 SPECIFIC TECHNICAL REQUIREMENTS

Technical Parameters for Marshalling Kiosk

- | | | | |
|----|--------------------------------|---|---------------------------------|
| a) | Installation | : | Outdoor |
| b) | Design Ambient air temperature | : | 50°C |
| c) | Material used | : | stainless steel |
| d) | Degree of protection | : | IP 55 as per IS 13947 |
| e) | Paint Shade | : | Ext—RAL 7032
Int--- RAL 7032 |
| f) | Control Wiring | | |
| | Size of conductor | : | 2.5mm ² |
| | Conductor | : | Stranded copper |
| g) | Space Heater Rating | : | 240 V, At least 40 W |
| h) | No. of AC incoming feeders | | |
| | 3-phase, 4-wire | : | 2 |
| | Changeover between incomers | : | Automatic |
| i) | No. of AC outgoing feeders | | |
| | 3-phase, 4-wire | : | Refer Selection Table |
| | 1-phase, 2-wire | : | Refer Selection Table |
| | Earthlinks | : | As required |

2.2 Following type of different Marshalling kiosk is proposed with detailed description as given below--

SI No.	Type	No. of Interlocking TBs	No of TBs for CT/ VT connections	100A Receptacle	No of AC Outgoing Feeders Amps- Nos
1.	MK-SAS	Nil	Nil	No	As per Section 1 , 1.4 a.(ii)
2.	MK 200	200	Nil	No	As per Section 1 , 1.4 a.(ii)

Marshalling kiosk shall have distinct compartments for the following purposes as applicable:

- 1) **Auxiliary Power Circuits:** The incoming and outgoing supplies shall be marshalled through cables terminated on Stud type terminal blocks. This compartment shall receive two incoming 415V, 3 phase, 63A AC supplies through 2 Nos TPN MCB units with auto-changeover including timers and distribute Nine (9) No. 16A, three phase outgoing supplies controlled by TPN MCBs. Also it shall distribute two (2) Nos. 415V, 63A & Ten (10) Nos, 240V, 10A, single phase supplies to be controlled by SP MCBs to be drawn from above three-phase incomers. The terminal blocks used for above mentioned aux power incomer circuits shall be suitable for making loop-in loop-out connection of 3.5x 70 sq mm connected cable. And for outgoing aux power circuits, terminal blocks shall be CBTM5 of Elmex/ Eq.
 - 20% spare TBs of each type shall be mounted in the offered MKs.

- 2) Auxiliary circuit (Heater, Lamp and Socket) shall be provided

3) The Marshalling kiosk shall be supplied with fixing hardware / foundation bolts.

- 2.3** Bidder must quote addition /deletion price for each and every type of the fitments viz., MCB, Contactors, Timer, Fuse, Switches, Terminal Blocks etc.

2.4 APPLICABLE STANDARDS

STANDARD	TITLE
IS 13947(Part 1)	Low voltage switchgear and control gear: General rules
IS 5039	Distribution feeder pillars for voltages not exceeding 1000V ac / 1200V dc.
IS 8623	Specification for Low voltage Switchgear and Control gear Assemblies
IEC 60439	Factory built assemblies of low voltage switchgear and control gear
IS 13703 (All Parts):	Specification for Low-Voltage Fuses for Voltages not exceeding 1000 V AC and 1500 V DC - General Requirements

The equipment shall conform to the latest applicable Indian standard and their amendments. The equipment complying with any authorised international standard will also be considered if it ensures performance equivalent to or superior to Indian standards. In the event of supply of equipment conforming to any internationally recognised standard other than the Indian standards, the salient features of comparison shall be brought out.

2.5 SPECIFIC DESIGN & MANUFACTURING REQUIREMENTS

Marshalling Kiosks shall generally conform to IS-5039, IS-8623 or IEC-60439, and/ or its latest amendments/ issues as applicable.

Marshalling Kiosk (MK) shall be of 304 grade Stainless steel ~~or aluminium~~ enclosure and shall be dust, water and vermin proof. The thickness stainless steel shall be 1.6mm. The box shall be properly braced to prevent wobbling. There shall be sufficient reinforcement to provide level surfaces, resistance to vibrations and rigidity during transportation and installation. Top of the boxes shall be sloped towards rear.

Canopy and sealing arrangements for operating rods shall be provided to prevent ingress of rain water.

Marshalling kiosk may be front as well as rear opening type. The Marshalling Kiosks shall be free standing or pedestal-mounting type. The enclosures shall be provided with double hinged doors and /or removable covers with padlocking arrangements. The distance between two hinges shall be adequate to ensure uniform sealing pressure against atmosphere. All doors, removable covers and plates shall be gasketed all round with suitable profiled EPDM/Neoprene/PU gaskets. The gasket shall be tested in accordance with approved quality plan, IS:11149 and IS:3400. All gasketed surfaces shall be smooth, straight and reinforced if necessary to minimize distortion and to make a tight seal. The quality of gaskets shall be such that it does not get damaged/ cracked during ten years of operation of the equipment or its major overhaul whichever is earlier. Ventilating louvers, if provided, shall be with screens and filters. The screen shall be fine wire mesh made of brass.

-Further, the gasketing arrangement shall be such that gaskets are pasted in slots (in door fabrication/gasket itself) in order to prevent ingress of dust and moisture inside the panels so that no internal rusting occurs in panels during the operation of the equipment.

All housings shall be designed for the entry of cables from the bottom by means of weatherproof and dust-proof connections. MK shall be designed with generous clearance to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the housing. A suitably gasketed undrilled cable gland plate projecting at least 150mm above the base of the housing shall be provided for this purpose. The gland shall project at least 25 mm above the gland plate to prevent entry of moisture in the cable crutch. Gland plate shall have provision for some future glands to be provided later, if required. The Nickel plated glands shall be dust proof, screw on & double compression type and made of brass. The glands shall conform to BS:6121. ***The gland plate meant for each section shall be split in to two parts.***

A 240V, single phase, 50 Hz, 15 amp AC plug and socket shall be provided in the cabinet with ON-OFF switch for connection of hand lamps. Plug and socket shall be of industrial grade. For incoming supply, SPN MCB of suitable rating shall be provided. Illumination of each compartment of each MK shall be with suitable number of door-operated LED based illumination of minimum 9 watts shall be provided. The switching of the fittings shall be controlled by the door switch., single phase, 50 Hz AC heaters with thermostats controlled by switch and fuse shall be provided to maintain inside temperature 10 deg. above the ambient. The fittings shall be complete with switchfuse unit and switching of the fittings shall be controlled by the respective panel door switch. All control switches shall be of rotary MCB/switch type and Toggle/ Piano switches shall not be accepted.

Each MK shall be provided with two separate Earthing pads to receive ~~75 mm x 12 mm~~ or 50mm x 6mm GS flat. The connection shall be bolted type with 2 bolts per pad. The earth wire shall be terminated on to the earthing pad and secured by the use of self etching washer. Earthing of hinged door shall be done by using a separate earth wire. The hinged door shall be provided with danger plate, and internal wiring diagram pasted on inside of the door. The front label shall be on a 3 mm thick plastic plate white letters engraved on black background.

The exterior and interior colour of the paint in case of new substations shall preferably be RAL 7032 for all equipment, marshalling boxes, junction boxes, control cabinets, panels etc. unless specifically mentioned under respective sections of the equipments. Glossy white colour inside the equipments /boards /panels/junction boxes is also acceptable

2.6 TERMINAL BLOCKS AND WIRING

Terminal blocks shall be 650V grade and have continuous rating to carry the maximum expected current on the terminals and non breakable type. These shall be moulded, complete with insulating barriers, **stud type** terminals, complete with washers, nuts and lock nuts.

The terminal shall be such that maximum contact area is achieved when a cable is terminated. The terminal shall have a locking characteristic to prevent cable from escaping from terminal clamp unless it is done intentionally. The conducting part in contact with the cable shall preferably be tinned or silver-plated. However, nickel-plated copper or zinc-plated steel shall also be acceptable.

The terminal blocks shall be of extensible design. The terminal blocks shall have locking arrangement to prevent its escape from the mounting rails. Terminal block design shall include a white-fiber marking strip. Markings on terminal strips shall correspond to numbers on wiring diagrams. The terminal blocks shall be fully enclosed with removable covers of transparent, non-deteriorating type plastic material. Insulating barriers shall be provided between the terminal blocks. These barriers shall not hinder the operator from carrying out the wiring without removing barriers. The arrangement shall be such that it is possible to safely connect or disconnect terminals on the live circuits and replace fuse links when the cabinet is live.

Unless otherwise specified, terminal blocks shall be suitable for connecting minimum of two of 2.5 sq. mm copper flexible conductors on each side.

- | | | |
|----|-------------------------------------|---|
| a) | All circuits except CT/CVT circuits | Minimum of two of 2.5 sq. mm copper flexible on each side. |
| b) | All CT/CVT circuits | Minimum of four of 2.5-sq. mm copper flexible on each side. |

Atleast 20 % spare terminals shall be provided on each MK1 and these spare terminals shall be uniformly distributed on all terminals rows.. There shall be a minimum clearance of 250 mm between the first/ bottom row of terminal blocks and the associated cable gland plate. Also the clearance between two adjacent rows of terminal blocks shall be a minimum of 150 mm.

All internal wiring shall be carried out with single core, stranded copper conductor wires with PVC insulation and shall be flame, vermin and rodent proof.

The minimum size of stranded copper conductor used for internal wiring shall be 2.5-sq. mm

All internal wiring shall be securely supported, neatly arranged, readily accessible and connected to equipment terminals and terminal blocks. Wiring gutters /troughs shall be provided for this purpose and for interlocking TBs as well.

Wire termination shall be made with solder less crimping type of tinned copper lugs, which firmly grip the conductor and insulation. Insulated sleeves shall be provided at all the wire terminations.

Engraved/ painted core identification plastic ferrules marked to correspond with panel wiring diagram numbering shall be fitted at both ends of each wire. Ferrules shall fit tightly on wires and shall not fall off when the wire is disconnected from the terminal blocks.

2.7 TESTING

TYPE TESTS

The Marshalling Kiosks shall have been subjected to type test for the IP 55 degree of protection of enclosure as per IS 13947.

- a) 2.5 kV withstand for one minute
- b) Insulation Resistance
- c) Functional tests

ROUTINE TESTS

The Marshalling Kiosks shall be subjected to following routine tests, as per IS 5039:

- a) 2.5 kV rms. for one minute test
- b) Check for wiring
- c) Visual and dimensional check
- d) Checking for paint.

SECTION-2 **Junction Box**

2.0 SCOPE

This technical specification covers the requirements of design, manufacture, testing at works, packing and despatch of JUNCTION BOX. No deviation from the requirements specified in various clauses of this specification shall be allowed.

2.1 SPECIFIC TECHNICAL REQUIREMENTS

Technical Parameters for Junction Box

- | | | | |
|----|--------------------------------|---|------------------------------|
| a) | Installation | : | Outdoor |
| b) | Design Ambient air temperature | : | 50°C |
| c) | Material used | : | Stainless steel/aluminium |
| d) | Degree of protection | : | IP 55 as per IS 13947 |
| e) | Paint Shade | : | Ext—RAL 7032
Int—RAL 7032 |
| f) | Control Wiring | | |
| | Size of conductor | : | 2.5mm ² |
| | Conductor | : | Stranded copper |
| g) | Space Heater Rating | : | 240 V, At least 40 W |
| h) | Terminal Block | | |
| | As per Below Table | | |
| | Earthlinks | : | As required |

2.2 Following different type of Junction Boxes are proposed

TABLE-1

Sl No.	Type	No of TBs	Type of TBs
1	JB-D180	180	Stud Type, Disconnecting, CATDM4/ Eq
2	JB-130	130	Stud Type, Disconnecting CATDM4/ Eq

Junction Box shall have terminals strips in vertical formation exclusively used for shorting the CT & VT secondary circuits. The type and number of TBs shall be as per selection **Table-1** above. **Refer TB chart (Annexure 1) for numbering methodology and dispositioning of TBs.**

Auxiliary circuit (Heater, Lamp and Socket) shall be provided

The Junctions Boxes shall be supplied alongwith fixing hardware/ bolts etc.

- 2.3** Bidder must quote addition /deletion price for each and every type of the fitments viz., Fuse, Switches, Terminal Blocks etc.

2.4 APPLICABLE STANDARDS

STANDARD	TITLE
IS 13947(Part 1)	Low voltage switchgear and control gear: General rules
IS 5039	Distribution feeder pillars for voltages not exceeding 1000V ac / 1200V dc.
IS 8623	Specification for Low voltage Switchgear and Control gear Assemblies
IEC 60439	Factory built assemblies of low voltage switchgear and control gear
IS 13703 (All Parts):	Specification for Low-Voltage Fuses for Voltages not exceeding 1000 V AC and 1500 V DC - General Requirements

The equipment shall conform to the latest applicable Indian standard and their amendments. The equipment complying with any authorised international standard will also be considered if it ensures performance equivalent to or superior to Indian standards. In the event of supply of equipment confirming to any internationally recognised standard other than the Indian standards, the salient features of comparison shall be brought out.

2.5 SPECIFIC DESIGN & MANUFACTURING REQUIREMENTS

Junction Box shall generally conform to IS-5039, IS-8623 or IEC-60439, and/ or its latest amendments/ issues as applicable.

Junction boxes shall be made of stainless steel of atleast 1.5 mm thick or aluminum enclosure of atleast 1.6 mm thick and shall be dust, water and vermin proof. Stainless steel used shall be of grade SS304 (SS316 for coastal area) or better. The box shall be properly braced to prevent wobbling. There shall be sufficient reinforcement to provide level surfaces, resistance to vibrations and rigidity during transportation and installation. In case of aluminium enclosed box the thickness of aluminum shall be such that it provides adequate rigidity and long life as comparable with sheet steel of specified thickness.

The JB shall be structure mounted type. They shall have double hinged doors with padlocking arrangement. All doors, removable covers and plates shall be gasketed all around with suitably profiled EPDM/Neoprene/PU gaskets. The gasket shall be tested in accordance with approved quality plan, IS:11149 and IS:3400. Ventilating Louvers, if provided, shall have screen and filters. The screen shall be fine wire mesh made of brass. Further, the gasketing arrangement shall be such that gaskets are pasted in slots (in door fabrication/gasket itself) in order to prevent ingress of dust and moisture inside the panels so that no internal rusting occurs in panels during the operation of the equipment.. The gasket shall be tested in presence of purchaser as per approved quality plan. All gasketed surfaces shall be smooth, straight and reinforced if necessary to minimize distortion and to make a tight seal. The quality of gaskets shall be such that it does not get damaged/ cracked during ten years of operation of the equipment or its major overhaul whichever is earlier. Ventilating louvers, if provided, shall be with screens and filters. The screen shall be fine wire mesh made of brass.

The enclosures shall be provided with hinged doors and /or removable covers with padlocking arrangements. The distance between two hinges shall be adequate to ensure uniform sealing pressure against atmosphere.

All housings shall be designed for the entry of cables from the bottom by means of weatherproof and dust-proof connections. JB shall be designed with generous clearance to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the housing. A suitable undrilled cable gland plate projecting at least 150mm above the base of the housing shall be provided for this purpose. The gland shall project at least 25 mm above the gland plate to prevent entry of moisture in the cable crutch. Gland plate shall have provision for some future glands to be provided later, if required.

A 240V, single phase, 50 Hz, 15 amp AC plug and socket shall be provided in the cabinet with ON-OFF switch for connection of hand lamps. Plug and socket shall be of industrial grade. For incoming supply, SPN MCB of suitable rating shall be provided. Illumination of each compartment of each JB shall be with door-operated LED based illumination of minimum 9 watts shall be provided. The switching of the fittings shall be controlled by the door switch.. Suitable 240 V, single phase, 50 Hz ac heaters with thermostats controlled by switch and fuse shall be provided to maintain inside temperature 10 deg. above the ambient. The fittings shall be complete with switch fuse unit and switching of the fittings shall be controlled by the respective panel door switch. All control switches shall be of MCB/rotary switch type and Toggle/ Piano switches shall not be accepted.

Each JB shall be provided with two earthing pads to receive 75 mm x12 mm or 50mm x 6mm GS flat. The connection shall be bolted type with 2 bolts per pad. The earth wire shall be terminated on to the earthing pad and secured by the use of etching washer. Earthing of hinged door shall be done by using a separate earth wire. The hinged door shall be provided with danger plate, and internal wiring diagram pasted on inside of the door. The front label shall be on a 3 mm thick plastic plate white letters engraved on black background.

2.6 TERMINAL BLOCKS AND WIRING

Terminal blocks shall be 650V grade and have continuous rating to carry the maximum expected current on the terminals and non breakable type. These shall be moulded, complete with insulating barriers, **stud type** terminals, complete with washers, nuts and lock nuts.

The terminal shall be such that maximum contact area is achieved when a cable is terminated. The terminal shall have a locking characteristic to prevent cable from escaping from terminal clamp unless it is done intentionally. The conducting part in contact with the cable shall preferably be tinned or silver-plated. However, nickel-plated copper or zinc-plated steel shall also be acceptable.

The terminal blocks shall be of extensible design. The terminal blocks shall have locking arrangement to prevent its escape from the mounting rails. Terminal block design shall include a white-fiber marking strip. Markings on terminal strips shall correspond to numbers on wiring diagrams. The terminal blocks shall be fully enclosed with removable covers of transparent, non-deteriorating type plastic material. Insulating barriers shall be provided between the terminal blocks. These barriers shall not hinder the operator from carrying out the wiring without removing barriers. The arrangement shall be such that it is possible to safely connect or disconnect terminals on the live circuits and replace fuse links when the cabinet is live.

Terminal blocks for cables going to a common destination shall as far as possible be grouped to each other. All input and output terminals of each control cubicle shall be tested for surge withstand capability in accordance with the relevant IEC publications, in both longitudinal as well as transverse modes. The Supplier shall also provide all necessary filtering, surge protection, interface relays and any other measures necessary to achieve an impulse withstand level at the cable interfaces of the equipment.

There shall be a minimum clearance of 250 mm between the first/ bottom row of terminal blocks and the associated cable gland plate. Also the clearance between two adjacent rows of terminal blocks shall be a minimum of 150 mm.

All internal wiring shall be carried out with single core, stranded copper conductor wires with PVC insulation and shall be flame, vermin and rodent proof.

The minimum size of stranded copper conductor used for internal wiring shall be 2.5-sq. mm

All internal wiring shall be securely supported, neatly arranged, readily accessible and connected to equipment terminals and terminal blocks. Wiring gutters /troughs shall be provided for this purpose and for CT/ VT circuits as well.

Wire termination shall be made with solder less crimping type of tinned copper lugs, which firmly grip the conductor and insulation. Insulated sleeves shall be provided at all the wire terminations.

Engraved/ painted core identification plastic ferrules marked to correspond with panel wiring diagram numbering shall be fitted at both ends of each wire. Ferrules shall fit tightly on wires and shall not fall off when the wire is disconnected from the terminal blocks.

2.7 TESTING

TYPE TESTS

The Junction Boxes shall have been subjected to type test for the IP 55 degree of protection of enclosure as per IS 13947.


- a) 2.5 kV withstand for one minute
- b) Insulation Resistance
- c) Functional tests

ROUTINE TESTS

The Junction Box shall be subjected to following routine tests, as per IS 5039:



- a) 2.5 kV rms. for one minute test
- b) Check for wiring
- c) Visual and dimensional check
- d) Checking for paint.

Annexure-1

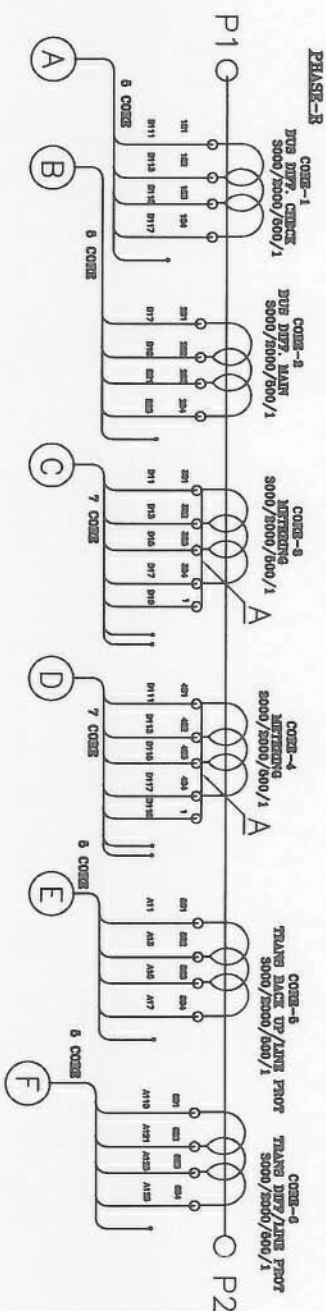

NOTE

1. INTERPOLE CABLEING (A) TO (F) 2.5 SQ.MM STRANDED FLEXIBLE ARMURED COPPER CABLE OF 1100V GRADE (FROM CT SEC TO MARSHALLING BOX).

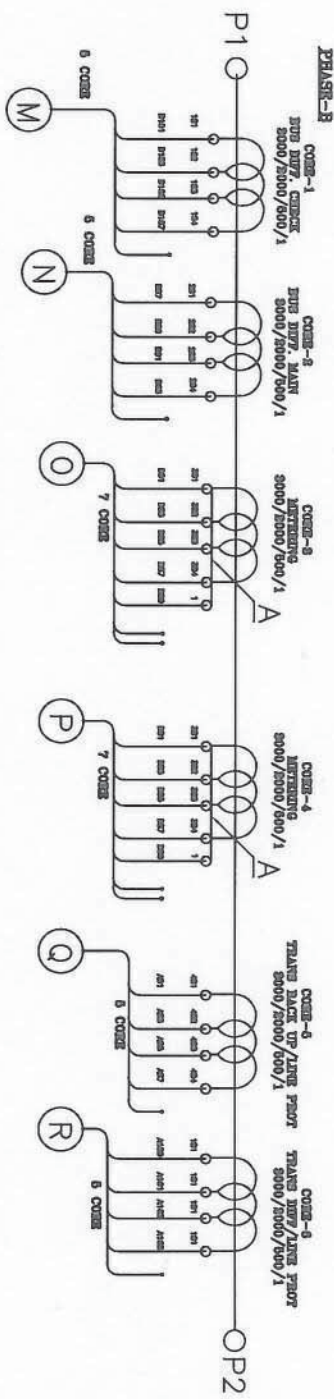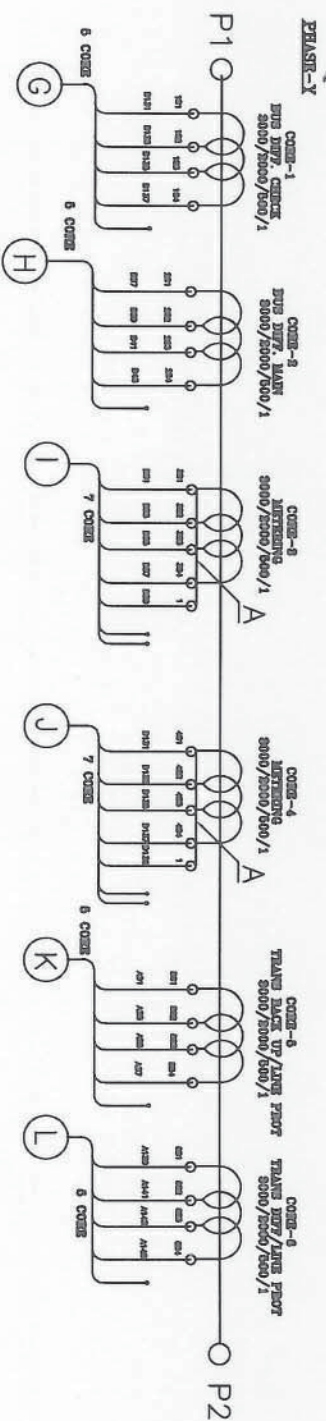

FOR TENDER PURPOSE ONLY

POWER GRID CORPORATION
OF INDIA LIMITED
(A Government of India Enterprise)

PROJECT : STANDARD


TITLE: WIRING DIAGRAM OF
MARSHALLING BOX FOR 765KV/400KV CT

DRAWN Drawing No.: 0000-000-7-3-1-003
PAGE 1 OF 3

REV. 1


CT CORE-1

TB-1

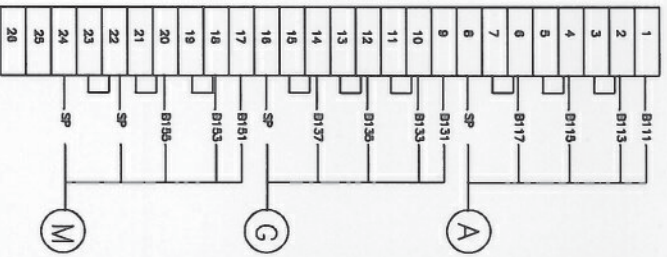


CT CORE-2

TB-2

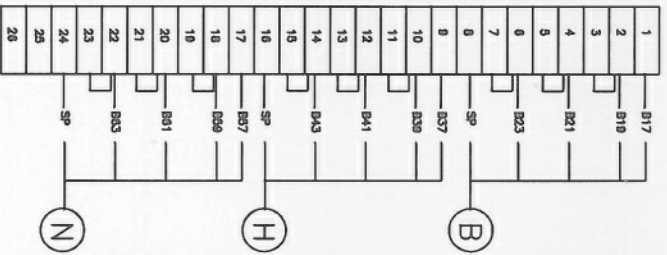


CT CORE-3

TB-3

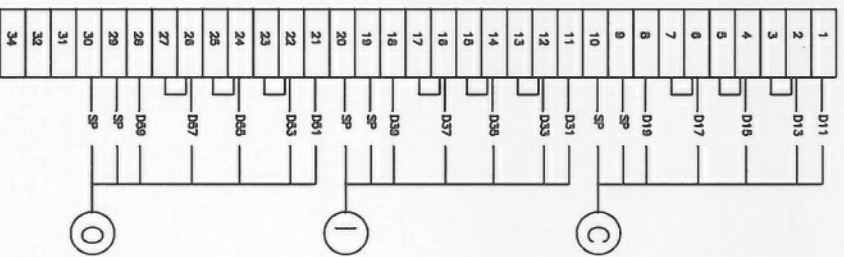


CT CORE-4

TB-4

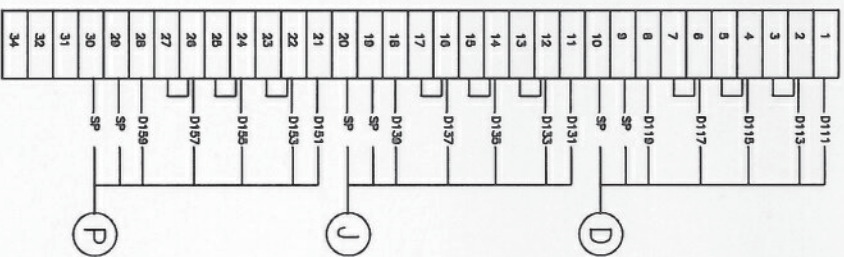


CT CORE-5

TB-5

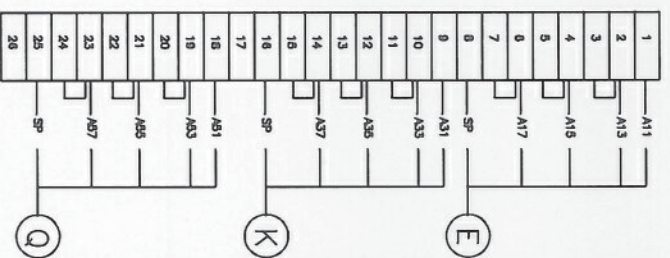


CT CORE-6

TB-6

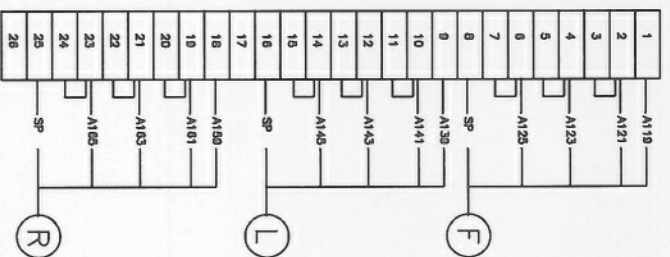

FOR TENDER PURPOSE ONLY

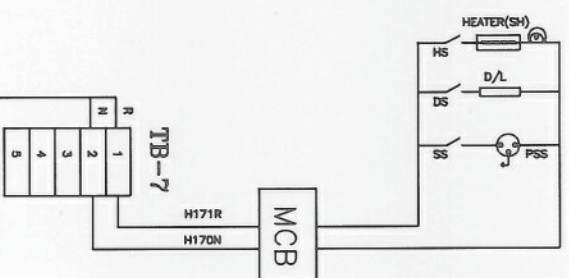220V, 50 HZ
SUPPLY

NOTE

1. TERMINAL BLOCKS SHALL BE DISCONNECTING STUD TYPE WITH TRANSPARENT COVER.
2. IN TB-3 & TB-4, COMPENSATING CORE (A) IF USED SHALL BE CONNECTED ACROSS
 - i. 1-2, 11-12, 21-22 FOR RATIO 500/1
 - ii. 1-4, 11-14, 21-24 FOR RATIO 2000/1
 - iii. 1-6, 11-16, 21-26 FOR RATIO 3000/1
 - iv. 4-6, 14-16, 24-26 FOR RATIO 1000/1.
3. HS-HEATER SWITCH, DS-DOOR SWITCH, SS-SOCKET SWITCH, TH-THERMOSTAT
4. THE DETAILS OF THIS DRAWING ARE SUBJECT TO CHANGE DURING DETAILED ENGINEERING.

POWER GRID CORPORATION
OF INDIA LIMITED

(A Government of India Enterprise)



PROJECT : STANDARD

TITLE: WIRING DIAGRAM OF
MARSHALLING BOX FOR 765KV/400KV CTDrawing No.: 0000-000-7-3-1-000
PAGE 8 OF 8

REV. 1

Applicable for 220kV BAY CT's
CT JB D 130 Terminal Distribution

CORE 1

TB1	
R1S1	01
R1S2	02
	03
R1S3	04
	05
	06
	07
Y1S1	08
Y1S2	09
	10
Y1S3	11
	12
	13
	14
B1S1	15
B1S2	16
	17
B1S3	18
	19
	20
	21
	22
	23

CORE 2

TB2	
R2S1	01
R2S2	02
	03
R2S3	04
	05
	06
	07
Y2S1	08
Y2S2	09
	10
Y2S3	11
	12
	13
	14
B2S1	15
B2S2	16
	17
B2S3	18
	19
	20
	21
	22
	23

CORE 3

TB3	
R3S1	01
R3S2	02
	03
R3S3	04
	05
R3S4	06
	07
	08
	09
	10
Y3S1	11
Y3S2	12
	13
Y3S3	14
	15
Y3S4	16
	17
	18
	19
	20
B3S1	21
B3S2	22
	23
B3S3	24
	25
B3S4	26
	27
	28
	29
	32

CORE 4

TB4	
R4S1	01
R4S2	02
	03
R4S3	04
	05
R4S4	06
	07
	08
Y4S1	09
Y4S2	10
	11
Y4S3	12
	13
Y4S4	14
	15
	16
B4S1	17
B4S2	18
	19
B4S3	20
	21
B4S4	22
	23
	24
	25
	26

CORE 5

TB5	
R5S1	01
R5S2	02
	03
R5S3	04
	05
R5S4	06
	07
	08
Y5S1	09
Y5S2	10
	11
Y5S3	12
	13
Y5S4	14
	15
	16
B5S1	17
B5S2	18
	19
B5S3	20
	21
B5S4	22
	23
	24
	25
	26

Bharat Heavy Electricals Limited

Project: Substation package-SS19: Extension of 765kV Solapur, 765kV Aurangabad, 765kV Wardha, 400kV Khandwa, 400kV Rajgarh, 400kV Champa, 400/220kV Itarsi & 400/220kV Jabalpur substations

Section -3 of Technical Specification**Doc No. TB-408-316-S03, Rev.0****SECTION-3****PROJECT DETAILS & GENERAL SPECIFICATION****SITE INFORMATION**

Sl	Particular	Details																																					
a)	Owner	POWERGRID																																					
b)	Customer	POWERGRID																																					
c)	Project Title	Substation package-SS19: Extension of 765kV Solapur, 765kV Aurangabad, 765kV Wardha, 400kV Khandwa, 400kV Rajgarh, 400kV Champa, 400/220kV Itarsi & 400/220kV Jabalpur substations. Under Western Region System Strengthening Scheme (WRSS-20)																																					
d)	Location																																						
<table><tr><th>SL</th><th>Name of Substation</th><th>Name of State</th><th>Nearest Rail / Road Head</th></tr><tr><td>1</td><td>Solapur</td><td>Maharashtra</td><td>Solapur</td></tr><tr><td>2</td><td>Aurangabad</td><td>Maharashtra</td><td>Aurangabad</td></tr><tr><td>3</td><td>Wardha</td><td>Maharashtra</td><td>Wardha</td></tr><tr><td>4</td><td>Khandwa</td><td>M.P.</td><td>Khandwa</td></tr><tr><td>5</td><td>Rajgarh</td><td>M.P</td><td>Rajgarh</td></tr><tr><td>6</td><td>Champa</td><td>Chhattisgarh</td><td>Champa</td></tr><tr><td>7</td><td>Jabalpur</td><td>M.P.</td><td>Jabalpur</td></tr><tr><td>8</td><td>Itarsi</td><td>M.P.</td><td>Itarsi</td></tr></table>				SL	Name of Substation	Name of State	Nearest Rail / Road Head	1	Solapur	Maharashtra	Solapur	2	Aurangabad	Maharashtra	Aurangabad	3	Wardha	Maharashtra	Wardha	4	Khandwa	M.P.	Khandwa	5	Rajgarh	M.P	Rajgarh	6	Champa	Chhattisgarh	Champa	7	Jabalpur	M.P.	Jabalpur	8	Itarsi	M.P.	Itarsi
SL	Name of Substation	Name of State	Nearest Rail / Road Head																																				
1	Solapur	Maharashtra	Solapur																																				
2	Aurangabad	Maharashtra	Aurangabad																																				
3	Wardha	Maharashtra	Wardha																																				
4	Khandwa	M.P.	Khandwa																																				
5	Rajgarh	M.P	Rajgarh																																				
6	Champa	Chhattisgarh	Champa																																				
7	Jabalpur	M.P.	Jabalpur																																				
8	Itarsi	M.P.	Itarsi																																				
e)	Transport Facilities	As above																																					
SITE CONDITIONS																																							
a)	Max. ambient air temp.	50°C																																					
b)	Min. ambient air temp.	0°C																																					
c)	Max. design ambient emp.	50°C																																					
d)	Design reference temp.	50°C																																					
e)	Average Humidity	Max. 100%																																					
f)	Special corrosion conditions	No																																					

Bharat Heavy Electricals Limited

Project: Substation package-SS19: Extension of 765kV Solapur, 765kV Aurangabad, 765kV Wardha, 400kV Khandwa, 400kV Rajgarh, 400kV Champa, 400/220kV Itarsi & 400/220kV Jabalpur substations

Section -3 of Technical Specification**Doc No. TB-408-316-S03, Rev.0**

g)	Solar Radiation	1.2kW/sqmtr
h)	Atmospheric UV radiation	High
i)	Altitude above sea level	Less than 1000meter
j)	Pollution Severity	Normal Pollution level
k)	Seismic Zone	As per the seismic zone defined in the relevant BIS / IEC-62271-300 but not less than 0.3g horrizontal
WIND DATA		
	Wind velocity	As per IS
	Average No. of thunderstorm days per annum	As per IS
Main Electrical Parameters:		
Fault Levels:		
SL	Name of Substation	Fault level
1	765kV Solapur	40kA for 1sec
2	765kV Aurangabad	40kA for 1sec
3	765kV Wardha	40kA for 1sec
4	400kV Khandwa	40kA for 1sec
5	400kV Rajgarh	40kA for 1sec
6	400kV Champa	50kA for 1sec
7	400/220kV Jabalpur	40kA for 1sec
8	400/220kV Itarsi	40kA for 1sec
	Minimum Creepage Distance	25mm/kV for all equipments i.e. BPI / Bushing, CB, Isolator, CT, CVT, LA, NCT etc. 31mm/kV. For string insulators

ENCLOSED – “**SECTION-GTR (GENERAL TECHNICAL REQUIREMENT) REV.14**”
FOR DETAILS OF GENERAL TECHNICAL SPECIFICATION.

PLEASE READ TERMINOLOGY AS FOLLOWS -

1. Read "GTR" as "Section-3 of technical specification"
2. Read "Powergrid" as "BHEL/Powergrid".
3. Read "Employer" as "Powergrid".
4. Read "Contractor" as bidder

SECTION- GENERAL TECHNICAL REQUIREMENT (GTR)

INDEX

CLAUSE NO.	ITEM	PAGE NO.
1.0	Foreword	1
2.0	General Requirement	1
3.0	Standards	1
4.0	Services to be performed by the Equipment being furnished	2
5.0	Engineering Data and Drawings	5
6.0	Material/Workmanship	7
7.0	Design Improvements/Coordination	9
8.0	Quality Assurance Programme	9
9.0	Type Testing, Inspection & Inspection Certificate	15
10.0	Tests	16
11.0	Packaging & Protection	17
12.0	Finishing of Metal Surfaces	17
13.0	Handling, Storing & Installation	19
14.0	Tools	20
15.0	Auxiliary Supply	21
16.0	Support Structure	21
17.0	Clamps and Connectors including Terminal Connectors	22
18.0	Control Cabinets, Junction Boxes, Terminal Boxes & Marshalling Boxes for Outdoor Equipment	23
19.0	Disposal of packing material & waste from construction site	24
20.0	Terminal Blocks and Wiring	24
21.0	Lamps and Sockets	25
22.0	Bushings, Hollow Column Insulators, Support Insulators	26
23.0	Motors	26
24.0	Technical Requirement of Equipments	28
Annexure-A	Corona and Radio Interference Voltage (RIV) Test	2 sheets
Annexure-B	Seismic Withstand Test Procedure	1 sheet
Annexure-C	List of General Standards and Codes	23 sheets
Annexure-D	List of Drawings/Documents for second advance	2 sheets
Annexure-E	Comprehensive List of drawings	9 sheets
Annexure-F	Assessment report from Main Contractor for proposed sub-vendor's - List of enclosures	1 sheet
Annexure-G	MQP & Inspection Level Requirement	3 sheets
Annexure-H	Specification of RTV coating on porcelain insulators	2 sheets
Annexure-I	Standard Drawing for open platform	1 sheet
Annexure- C1 Corona and Radio Interference Voltage (RIV) Test - 2 SHEET		

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

1.0 FOREWORD

The provisions under this section are intended to supplement requirements for the materials, equipments and services covered under other sections of tender documents and are not exclusive.

2.0 GENERAL REQUIREMENT

2.1 The contractor shall furnish catalogues, engineering data, technical information, design documents, drawings etc., fully in conformity with the technical specification during detailed engineering.

2.2 It is recognised that the Contractor may have standardised on the use of certain components, materials, processes or procedures different from those specified herein. Alternate proposals offering similar equipment based on the manufacturer's standard practice will also be considered provided such proposals meet the specified designs, standard and performance requirements and are acceptable to Employer.

2.3 Wherever a material or article is specified or defined by the name of a particular brand, Manufacturer or Vendor, the specific name mentioned shall be understood as establishing type, function and quality and not as limiting competition.

2.4 Equipment furnished shall be complete in every respect with all mountings, fittings, fixtures and standard accessories normally provided with such equipment and/or needed for erection, completion and safe operation of the equipment as required by applicable codes though they may not have been specifically detailed in the Technical Specifications unless included in the list of exclusions. Materials and components which are minor in nature and incidental to the requirement but not specifically stated in the specification and bid price schedule, which are necessary for commissioning and satisfactory operation of the switchyard/ substation unless specifically excluded shall be deemed to be included in the scope of the specification and shall be supplied without any extra cost. All similar standard components/parts of similar standard equipment provided, shall be inter-changeable with one another.

~~2.5 The Contractor shall also be responsible for the overall co-ordination with internal /external agencies, Supplier of Employer's supplied equipments, project management, training of Employer's manpower, loading, unloading, handling, insurance, moving to final destination for successful erection, testing and commissioning of the substation /switchyard.~~

~~2.6 The bidder shall be responsible for safety of human and equipment during the working. It will be the responsibility of the Contractor to co-ordinate and obtain Electrical Inspector's clearance before commissioning. Any additional items, modification due to observation of such statutory authorities shall be provided by the Contractor at no extra cost to the Employer.~~

3.0 STANDARDS

3.1 The works covered by the specification shall be designed, engineered, manufactured, built, tested and commissioned in accordance with the Acts, Rules, Laws and Regulations of India.

3.2 The equipment to be furnished under this specification shall conform to latest issue with all amendments (as on the originally scheduled date of bid opening) of standard specified under Annexure-C of this section, unless specifically mentioned in the specification.

3.3 The Bidder shall note that standards mentioned in the specification are not mutually exclusive or complete in themselves, but intended to compliment each other.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- 3.4 The Contractor shall also note that list of standards presented in this specification is not complete. Whenever necessary the list of standards shall be considered in conjunction with specific IS/IEC.
- 3.5 When the specific requirements stipulated in the specifications exceed or differ than those required by the applicable standards, the stipulation of the specification shall take precedence.
- 3.6 Other internationally accepted standards which ensure equivalent or better performance than that specified in the standards specified under Annexure-C/ individual sections for various equipments shall also, be accepted, however the salient points of difference shall be clearly brought out during detailed engineering along with English language version of such standard. The equipment conforming to standards other than specified under Annexure-C/individual sections for various equipments shall be subject to Employer's approval.

4.0 SERVICES TO BE PERFORMED BY THE EQUIPMENT BEING FURNISHED

- 4.1 The 800kV and 420kV system is being designed to limit the switching surge over voltage of 1.9 p.u. and 2.5 p.u., respectively and the power frequency over voltage of 1.4 p.u. and 1.5 p.u., respectively. In case of the 420kV system, the initial value of the temporary overvoltages could be 2.0 p.u. for 1-2 cycles. The equipment furnished under this specification shall perform all its functions and operate satisfactorily without showing undue strain, restrike etc under such over voltage conditions.
- 4.2 All equipments shall also perform satisfactorily under various other electrical, electromechanical and meteorological conditions of the site of installation.
- 4.3 All equipment shall be able to withstand all external and internal mechanical, thermal and electromechanical forces due to various factors like wind load, temperature variation, ice & snow, (wherever applicable) short circuit etc for the equipment.
- 4.4 The bidder shall design terminal connectors of the equipment taking into account various forces that are required to withstand.
- 4.5 The equipment shall also comply to the following:
- a) To facilitate erection of equipment, all items to be assembled at site shall be "match marked".
 - b) All piping, if any between equipment control cabinet/operating mechanism to marshalling box of the equipment, shall bear proper identification to facilitate the connection at site.

4.6 System Parameter

765kV, 400kV & 220kV System

SL No	Description of parameters	765kV System	400kV System	220kV System
1.	System operating voltage	765kV	400kV	220kV
2.	Maximum operating voltage of the system (rms)	800kV	420kV	245kV
3.	Rated frequency	50HZ	50Hz	50Hz
4.	No. of phase	3	3	3
5.	Rated Insulation levels			

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

SL No	Description of parameters	765kV System	400kV System	220kV System
i)	Full wave impulse withstand voltage (1.2/50 microsec.)	2100kVp	1550kVp	1050 kVp
ii)	Switching impulse withstand voltage (250/2500 micro sec.) dry and wet	1550kVp	1050kVp	-
iii)	One minute power frequency dry withstand voltage (rms)	830kV	630kV	-
iv)	One minute power frequency dry and wet withstand voltage (rms)	-	-	460kV
6.	Corona extinction voltage	508 kV	320kV	-
7.	Max. radio interference voltage for frequency between 0.5 MHz and 2 MHz	2500 μV at 508 kV rms	1000 μV at 266kV rms	1000 μV at 156kV rms
8.	Minimum creepage distance - for Equipment other than Insulator string	20000 mm (24800 mm for coastal area)	10500 mm (13020 mm for coastal area)	6125 mm (7595 mm for coastal area)
	Minimum creepage distance - for Insulator String	As specified in Section-Switchyard Erection		
9.	Min. clearances			
i.	Phase to phase	7600mm (for conductor-conductor configuration) 9400mm (for rod-conductor configuration)	4000mm (for conductor-conductor configuration) 4200mm (for rod -conductor configuration)	2100 mm
ii.	Phase to earth	4900mm (for conductor-structure) 6400mm (for rod- structure)	3500 mm	2100 mm
iii)	Sectional clearances	10300 mm	6500 mm	5000 mm
10.	Rated short circuit current for 1 sec. duration	40kA/50kA (as applicable)	40kA/50kA/ 63 kA (as applicable)	40kA/ 50kA(as applicable)
11.	System neutral earthing	Effectively earthed	Effectively earthed	Effectively earthed

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

132kV, 66kV, 33kV & 11kV System

SL No	Description of parameters	132 kV System	66kV System	33 kV System	11kV System
1.	System operating voltage	132kV	66kV	33kV	11kV
2.	Maximum operating voltage of the system(rms)	145kV	72.5kV	36kV	12kV
3.	Rated frequency	50Hz	50Hz	50Hz	50Hz
4.	No. of phase	3	3	3	3
5.	Rated Insulation levels				
i)	Full wave impulse withstand voltage (1.2/50 microsec.)	650 kVp	325 kVp	170 kVp	75 kVp
ii)	One minute power frequency dry and wet withstand voltage (rms)	275kV	140kV	70kV	28kV
6.	Max. radio interference voltage for frequency between 0.5 MHz and 2 MHz	500 μ V at 92kV rms	-	-	-
7.	Minimum creepage distance	3625 mm (4495mm for coastal area)	1813 mm (2248mm for coastal area)	900 mm (1116mm for coastal area)	300 mm (372mm for coastal area)
8.	Min. clearances				
i.	Phase to phase	1300 mm	750 mm	320 mm	280 mm
ii.	Phase to earth	1300 mm	630 mm	320 mm	140 mm
iii.	Sectional clearances	4000 mm	3000 mm	2800 mm	2800 mm
9.	Rated short circuit current	40kA/ 31.5 kA (as applicable) for 1 sec	31.5 kA for 3 sec	25 kA for 3 sec	25 kA for 3 sec
10.	System neutral earthing	Effectively earthed	Effectively earthed	Effectively earthed	Effectively earthed

Notes:

1. The above parameters are applicable for installations up to an altitude of 1000m above mean sea level. For altitude exceeding 1000m, necessary altitude correction factor shall be applicable as per relevant IEC.
2. The insulation and RIV levels of the equipments shall be as per values given in the Technical Specification of respective equipment.
3. Corona and radio interference voltage test and seismic withstand test procedures for equipments shall be in line with the procedure given at **Annexure-A** and **Annexure-B** respectively.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

5.0 ENGINEERING DATA AND DRAWINGS

5.1 The list of drawings/documents which are to be submitted to the Employer is enclosed in **Annexure-E**. In case any additional drawings/documents are required, the same shall also be submitted during execution of the contract.

5.2 The Contractor shall submit 4 (four) sets of drawings/ design documents /data / detailed bill of quantity and 1 (one) set of test reports for the approval of the Employer. The contractor shall also submit the softcopy of the above documents in addition to hardcopy.

5.3 Drawings

5.3.1 All drawings submitted by the Contractor shall be in sufficient detail to indicate the type, size, arrangement, material description, Bill of Materials, weight of each component, break-up for packing and shipment, dimensions, internal & the external connections, fixing arrangement required and any other information specifically requested in the specifications.

5.3.2 Drawings submitted by the Contractor shall be clearly marked with the name of the Employer, the unit designation, the specifications title, the specification number and the name of the Project. POWERGRID has standardized a large number of drawings/documents of various make including type test reports which can be used for all projects having similar requirements and in such cases no project specific approval (except for list of applicable drawings alongwith type test reports) is required. However, distribution copies of standard drawings/documents shall be submitted as per provision of the contract. All titles, noting, markings and writings on the drawing shall be in English. All the dimensions should be in SI units.

5.3.3 The review of these data by the Employer will cover only general conformance of the data to the specifications and documents, interfaces with the equipment provided under the specifications, external connections and of the dimensions which might affect substation layout. This review by the Employer may not indicate a thorough review of all dimensions, quantities and details of the equipment, materials, any devices or items indicated or the accuracy of the information submitted. This review and/or approval by the Employer shall not be considered by the Contractor, as limiting any of his responsibilities and liabilities for mistakes and deviations from the requirements, specified under these specifications and documents.

5.5 All manufacturing and fabrication work in connection with the equipment prior to the approval of the drawings shall be at the Contractor's risk. The Contractor may make any changes in the design which are necessary to make the equipment conform to the provisions and intent of the Contract and such changes will again be subject to approval by the Employer. Approval of Contractor's drawing or work by the Employer shall not relieve the contractor of any of his responsibilities and liabilities under the Contract.

5.6 All engineering data submitted by the Contractor after final process including review and approval by the Employer shall form part of the Contract Document and the entire works performed under these specifications shall be performed in strict conformity, unless otherwise expressly requested by the Employer in Writing.

5.7 Approval Procedure

The following schedule shall be followed generally for approval and for providing final documentation.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- | | | |
|----|--|---|
| 1. | Furnishing of distribution copies (2 hard copies to each substation and one scanned copy (pdf format) | 2 weeks from the date of approval |
| 2. | Furnishing of distribution copies of test reports | |
| | (a) Type test reports (one scanned softcopy in pdf format to each substation plus one for corporate centre & one hardcopy per substation) | 2 weeks from the date of final approval |
| | (b) Routine Test Reports (one copy for each substation) | -do- |
| 3. | Furnishing of instruction/ operation manuals (2 copies per substation and one softcopy (pdf format) for corporate centre & per substation) | On completion of Engineering |
| 4. | As built drawings (two sets of hardcopy per substation & one softcopy (pdf format) for corporate centre & per substation) | On completion of entire works |

NOTE :

- (1) The contractor may please note that all resubmissions must incorporate all comments given in the earlier submission by the Employer or adequate justification for not incorporating the same must be submitted failing which the submission of documents is likely to be returned.
- (2) All drawings should be submitted in softcopy form, however substation design drawings like SLD, GA, all layouts etc. shall also be submitted in AutoCAD Version. SLD, GA & layout drawings shall be submitted for the entire substation in case of substation extension also.
- (3) The instruction Manuals shall contain full details of drawings of all equipment being supplied under this contract, their exploded diagrams with complete instructions for storage, handling, erection, commissioning, testing, operation, trouble shooting, servicing and overhauling procedures.
- (4) If after the commissioning and initial operation of the substation, the instruction manuals require any modifications/additions/changes, the same shall be incorporated and the updated final instruction manuals shall be submitted by the Contractor to the Employer.
- (5) The Contractor shall furnish to the Employer catalogues of spare parts.
- (6) All As-built drawings/documents shall be certified by site indicating the changes before final submission.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- 5.8 The list of major drawings/documents to be approved to qualify for second advance as per Section SCC, shall be as per **Annexure-D**.
- 6.0 MATERIAL/ WORKMANSHIP**
- 6.1 General Requirement**
- 6.1.1 Where the specification does not contain references to workmanship, equipment, materials and components of the covered equipment, it is essential that the same must be new, of highest grade of the best quality of their kind, conforming to best engineering practice and suitable for the purpose for which they are intended.
- 6.1.2 In case where the equipment, materials or components are indicated in the specification as “similar” to any special standard, the Employer shall decide upon the question of similarity. When required by the specification or when required by the Employer the Contractor shall submit, for approval, all the information concerning the materials or components to be used in manufacture. Machinery, equipment, materials and components supplied, installed or used without such approval shall run the risk of subsequent rejection, it is to be understood that the cost as well as the time delay associated with the rejection shall be borne by the Contractor.
- 6.1.3 The design of the Works shall be such that installation, future expansions, replacements and general maintenance may be undertaken with a minimum of time and expenses. Each component shall be designed to be consistent with its duty and suitable factors of safety, subject to mutual agreements. All joints and fastenings shall be devised, constructed and documented so that the component parts shall be accurately positioned and restrained to fulfill their required function. In general, screw threads shall be standard metric threads. The use of other thread forms will only be permitted when prior approval has been obtained from the Employer.
- 6.1.4 Whenever possible, all similar part of the Works shall be made to gauge and shall also be made interchangeable with similar parts. All spare parts shall also be interchangeable and shall be made of the same materials and workmanship as the corresponding parts of the Equipment supplied under the Specification. Where feasible, common component units shall be employed in different pieces of equipment in order to minimize spare parts stocking requirements. All equipment of the same type and rating shall be physically and electrically interchangeable.
- 6.1.5 All materials and equipment shall be installed in strict accordance with the manufacturer’s recommendation(s). Only first-class work in accordance with the best modern practices will be accepted. Installation shall be considered as being the erection of equipment at its permanent location. This, unless otherwise specified, shall include unpacking, cleaning and lifting into position, grouting, levelling, aligning, coupling of or bolting down to previously installed equipment bases/foundations, performing the alignment check and final adjustment prior to initial operation, testing and commissioning in accordance with the manufacturer’s tolerances, instructions and the Specification. All factory assembled rotating machinery shall be checked for alignment and adjustments made as necessary to re-establish the manufacturer’s limits suitable guards shall be provided for the protection of personnel on all exposed rotating and / or moving machine parts and shall be designed for easy installation and removal for maintenance purposes. The spare equipment(s) shall be installed at designated locations and tested for healthiness.
- 6.1.6 The Contractor shall apply oil and grease of the proper specification to suit the machinery, as is necessary for the installation of the equipment. Lubricants used for installation purposes shall be drained out and the system flushed through where necessary for applying the lubricant required for operation. The Contractor shall apply all operational lubricants to the equipment installed by him.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- 6.1.7 All oil, grease and other consumables used in the Works/Equipment shall be purchased in India unless the Contractor has any special requirement for the specific application of a type of oil or grease not available in India. If such is the case, he shall declare in the proposal, where such oil or grease is available. He shall help Employer in establishing equivalent Indian make and Indian Contractor. The same shall be applicable to other consumables too.

6.2 Provisions For Exposure to Hot and Humid climate

Outdoor equipment supplied under the specification shall be suitable for service and storage under tropical conditions of high temperature, high humidity, heavy rainfall and environment favourable to the growth of fungi and mildew. The indoor equipments located in non-air conditioned areas shall also be of same type.

6.2.1 Space Heaters

- 6.2.1.1 The heaters shall be suitable for continuous operation at 240V as supply voltage. On-off switch and fuse shall be provided.

- 6.2.1.2 One or more adequately rated thermostatically connected heaters shall be supplied to prevent condensation in any compartment. The heaters shall be installed in the compartment and electrical connections shall be made sufficiently away from below the heaters to minimize deterioration of supply wire insulation. The heaters shall be suitable to maintain the compartment temperature to prevent condensation.

6.2.2 FUNGI STATIC VARNISH

Besides the space heaters, special moisture and fungus resistant varnish shall be applied on parts which may be subjected or predisposed to the formation of fungi due to the presence or deposit of nutrient substances. The varnish shall not be applied to any surface of part where the treatment will interfere with the operation or performance of the equipment. Such surfaces or parts shall be protected against the application of the varnish.

6.2.3 Ventilation opening

Wherever ventilation is provided, the compartments shall have ventilation openings with fine wire mesh of brass to prevent the entry of insects and to reduce to a minimum the entry of dirt and dust.

6.2.4 Degree of Protection

The enclosures of the Control Cabinets, Junction boxes and Marshalling Boxes, panels etc. to be installed shall comply with following degree of protection as detailed here under:

- a) Installed out door: IP- 55
- b) Installed indoor in air conditioned area: IP-31
- c) Installed in covered area: IP-52
- d) Installed indoor in non-air conditioned area where possibility of entry of water is limited: IP-41.
- e) For LT Switchgear (AC & DC distribution Boards): IP-52

The degree of protection shall be in accordance with IS:13947 (Part-I)/IEC-60947 (Part-I)/IS 12063/IEC-60529. Type test report for IP-55 or higher degree of protection test, shall be submitted for approval.

6.3 RATING PLATES, NAME PLATES AND LABELS

- 6.3.1 Each main and auxiliary item of substation is to have permanently attached to it in a conspicuous position a rating plate of non-corrosive material upon which is to be engraved manufacturer's name, year of manufacture, equipment name, type or serial

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

number together with details of the loading conditions under which the item of substation in question has been designed to operate, and such diagram plates as may be required by the Employer. The rating plate of each equipment shall be according to IEC requirement.

- 6.3.2 All such nameplates, instruction plates, rating plates of transformers, reactors, CB, CT, CVT, SA, Isolators, C & R panels and PLCC equipments shall be bilingual with Hindi inscription first followed by English. Alternatively two separate plates one with Hindi and the other with English inscriptions may be provided.

6.4 FIRST FILL OF CONSUMABLES, OIL AND LUBRICANTS

All the first fill of consumables such as oils, lubricants, filling compounds, touch up paints, soldering/brazing material for all copper piping of circuit breakers and essential chemicals etc. which will be required to put the equipment covered under the scope of the specifications, into operation, shall be furnished by the Contractor unless specifically excluded under the exclusions in these specifications and documents.

7.0 DESIGN IMPROVEMENTS / COORDINATION

- 7.1 The bidder shall offer the equipment meeting the requirement of the technical specification. However, the Employer or the Contractor may propose changes in the specification of the equipment or quality thereof and if the contractor & Employer agree upon any such changes, the specification shall be modified accordingly.
- 7.2 If any such agreed upon change is such that it affects the price and schedule of completion, the parties shall agree in writing as to the extent of any change in the price and/or schedule of completion before the Contractor proceeds with the change. Following such agreement, the provision thereof, shall be deemed to have been amended accordingly.
- 7.3 The Contractor shall be responsible for the selection and design of appropriate equipments to provide the best co-ordinated performance of the entire system. The basic design requirements are detailed out in this Specification. The design of various components, sub-assemblies and assemblies shall be so done that it facilitates easy field assembly and maintenance.
- 7.4 The Contractor has to coordinate designs and terminations with the agencies (if any) who are Consultants/Contractor for the Employer. The names of agencies shall be intimated to the successful bidders.
- 7.5 The Contractor will be called upon to attend design co-ordination meetings with the Engineer, other Contractor's and the Consultants of the Employer (if any) during the period of Contract. The Contractor shall attend such meetings at his own cost at POWERGRID Corporate Centre, Gurgaon (Haryana) or at mutually agreed venue as and when required and fully cooperate with such persons and agencies involved during those discussions.
- #### **8.0 QUALITY ASSURANCE PROGRAMME**
- 8.1 To ensure that the equipment and services under the scope of this Contract, whether manufactured or performed within the Contractor's Works or at his Sub-Contractor's premises or at the Employer's site or at any other place of Work as applicable, are in accordance with the specifications, the Contractor shall ensure suitable quality assurance programme to control such activities at all points necessary. A quality assurance programme of the Contractor shall be in line with ISO requirements & shall generally cover the following:
- a) The organisation structure for the management and implementation of the proposed quality assurance programme.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- b) System for Document and Data Control.
- c) Qualification and Experience data of Bidder's key personnel.
- d) The procedure for purchases of materials, parts, components and selection of sub-Contractor's services including vendor analysis, source inspection, incoming raw material inspection, verification of material purchases etc.
- e) System for shop manufacturing and site erection controls including process controls, fabrication and assembly control.
- f) System for Control of non-conforming products including deviation dispositioning, if any and system for corrective and preventive actions based on the feedback received from the Customers and also internally documented system for Customer complaints.
- g) Inspection and test procedure both for manufacture and field activities.
- h) System for Control of calibration of testing and measuring equipment and the indication of calibration status on the instruments.
- i) System for indication and appraisal of inspection status.
- j) System of Internal Quality Audits, Management review and initiation of corrective and Preventive actions based on the above.
- k) System for authorising release of manufactured product to the Employer.
- l) System for maintenance of records.
- m) System for handling, storage and delivery.
- n) A quality plan detailing out the specific quality control measures and procedure adopted for controlling the quality characteristics relevant to each item of equipment furnished and /or service rendered.
- o) System for various field activities i.e. unloading, receipt at site, proper storage, erection, testing and commissioning of various equipment and maintenance of records. In this regard, the Employer has already prepared Standard Field Quality Plan for transmission line/substation equipments as applicable, Civil/erection Works which is required to be followed for associated works.

The Employer or his duly authorised representative reserves the right to carry out quality audit and quality surveillance of the system and procedure of the Contractor/his vendor's quality management and control activities.

8.2 Quality Assurance Documents

The Contractor shall ensure availability of the following Quality Assurance Documents:

- i) All Non-Destructive Examination procedures, stress relief and weld repair procedure actually used during fabrication, and reports including radiography interpretation reports.
- ii) Welder and welding operator qualification certificates.
- iii) Welder's identification list, welding operator's qualification procedure and welding identification symbols.
- iv) Raw Material test reports on components as specified by the specification and in the quality plan.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- v) The Manufacturing Quality Plan(MQP) indicating Customer Inspection Points (CIPs) at various stages of manufacturing and methods used to verify that the inspection and testing points in the quality plan were performed satisfactorily.
- vi) Factory test results for testing required as per applicable quality plan/technical specifications/GTP/Drawings etc.
- vii) Stress relief time temperature charts/oil impregnation time temperature charts, wherever applicable.

8.3 INSPECTION, TESTING & INSPECTION CERTIFICATE

8.3.1 Contractor shall procure bought out items from sub-vendors as per the list in "Compendium of Vendors" available on POWERGRID web-site www.powergridindia.com after ensuring compliance to the requirements/conditions mentioned therein. Contractor shall explore first the possibilities of procuring the bought out items from POWERGRID approved existing vendors. In case of their unavailability / non-response, Contractor may approach POWERGRID for additional sub-vendor approval. In that case, the assessment report of proposed sub vendor by Contractor along with the enclosures as per **Annexure-F** shall be submitted within 60 days of the award. The proposal shall be reviewed and approval will be accorded based on the verification of the document submitted and/or after the physical assessment of the works as the case may be. The physical assessment conducted by POWERGRID, if required, shall be on chargeable basis. Charges shall be as per the POWERGRID norms prevailing at that time, which shall be intimated by POWERGRID separately. If proposal for sub-vendor is submitted after 60 days, the Contractor's proposal normally will not be considered for current LOA. However, POWERGRID may process the case for developing more vendors for referred items, if found relevant. In all cases, It is the responsibility of the Contractor that Project activities do not suffer on account of delay in approval/non approval of a new sub-vendor.

The responsibility and the basis of inspection for various items & equipment is placed at **Annexure-G** along with the requirement of MQP (Manufacturing Quality Plan), ITP(Inspection & Test Plan), FAT(Factory Acceptance Test) which should be valid & POWERGRID approved and Level of inspection envisaged against each item.

Contractor shall ensure that order for items where MQP/ITP/FAT is required will be placed only on vendors having valid MQP/ITP/FAT and where the supplier's MQP/ITP/FAT is either not valid or has not been approved by POWERGRID, MQP shall be generally submitted as per POWERGRID format before placing order.

Items not covered under MQP/ITP/FAT shall be offered for inspection as per POWERGRID LOA/technical Specifications/POWERGRID approved data sheets/ POWERGRID approved drawings and relevant Indian/International standards.

Inspection Levels: For implementation of projects in a time bound manner and to avoid any delay in deputation of POWERGRID or its authorized representative, involvement of POWERGRID for inspection of various items / equipment will be based on the level below:

Level -I: Contractor to raise all inspection calls and review the report of tests carried out by the manufacturer, on his own, as per applicable standards/ POWERGRID specification, and submit to concerned POWERGRID inspection office/Inspection Engineer. CIP/MICC will be issued by POWERGRID based on review of test reports/certificates of manufacturers.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

Level – II: Contractor to raise all inspection calls and carry out the inspection on behalf of POWERGRID on the proposed date of inspection as per applicable standards/specification. However, in case POWERGRID wishes to associate itself during inspection, the same would be intimated to Contractor and CIP/MICC will be issued by POWERGRID. Else, Contractor would submit their test reports/certificates to POWERGRID. CIP/MICC will be issued by POWERGRID based on review of test reports/certificates.

Level - III: Contractor to raise inspection calls for both, stage (as applicable) & final inspection and carry out the stage inspections (if applicable) on behalf of POWERGRID on the proposed date of inspection as per applicable standards/specification. However, in case POWERGRID wishes to associate itself during stage inspection, the same would be intimated to Contractor and CIP will be issued by POWERGRID. Else, Contractor would submit the test reports / certificates of stage inspection after their own review and CIP will be issued by POWERGRID based on review of test reports / certificates. Final inspection will be carried out by POWERGRID and CIP/MICC will be issued by POWERGRID.

Level – IV: Contractor to raise inspection calls for both, stage (as applicable) & final inspections. POWERGRID will carry out the inspection for both stage & final inspection as per applicable standards/specification and CIP/MICC will be issued by POWERGRID.

- 8.3.2 Contractor shall ensure that to implement the above inspection levels, particularly for the quality control and inspection at sub-vendor's works, they would depute sufficient qualified & experienced manpower in their Quality Control and Inspection department. Further, to assure quality of construction, Contractor shall have a separate workforce having appropriate qualification & experience and deploy suitable tools and plant for maintaining quality requirement during construction in line with applicable Field Quality Plan (FQP).
- 8.3.3 The Employer, his duly authorised representative and/or outside inspection agency acting on behalf of the Employer shall have at all reasonable times access to the Contractor's premises or Works and shall have the power at all reasonable times to ensure that proper Quality Management practices / norms are adhered to, inspect and examine the materials & workmanship of the Works, to carry out Quality/Surveillance Audit during manufacture or erection and if part of the Works is being manufactured or assembled at other premises or works. The Contractor shall obtain for the Employer and for his duly authorised representative permission to inspect as if the works were manufactured or assembled on the Contractor's own premises or works. The item/equipment, if found unsatisfactory with respect to workmanship or material is liable to be rejected. The observations for improvements during product/ process inspection by POWERGRID shall be recorded in Quality Improvement Register (available & maintained at works) for review & timely compliance of observations.
- 8.3.4 Contractor shall submit inspection calls over internet through POWERGRID website. The required vendor code and password to enable raising inspection call will be furnished to the main Contractor within 30 days of award of contract on submission of documents by Contractor. After raising the inspection calls, Contractor shall then proceed as per the message of that particular call which is available on the message board.
- 8.3.5 The Employer reserves the right to witness any or all type, acceptance and routine tests specified for which the Contractor shall give the Employer/Inspector Twenty one (21) days written notice of any material being ready for testing for each stage of

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

testing as identified in the approved quality plan as customer inspection point (CIP) for indigenous inspections. All inspection calls for overseas material shall be given at least forty five (45) days in advance. Such tests shall be to the Contractor's account except for the expenses of the Inspection Engineer. The Employer/inspector, unless witnessing of the tests is waived by Employer, will attend such tests within Twenty one (21) days of the date of which the equipment is notified as being ready for test/inspection, failing which the Contractor may proceed with the test which shall be deemed to have been made in the Inspector's presence and he shall forthwith forward to the Inspector three copies of tests, duly certified. Contractor shall ensure, before giving notice for type test, that all drawings and quality plans have been got approved. The equipment shall be dispatched to site only after approval of Routine and Acceptance test results and Issuance of Dispatch Clearance in writing by the Employer. CIP/Material Inspection clearance certificate (MICC) shall be issued by the Employer after inspection of the equipment or review of test reports as applicable. Employer may waive off the presence of Employer's inspecting engineer. In that case test will be carried out as per approved QP and test certificate will be furnished by the supplier for approval. CIP/MICC will be issued only after review and approval of the test reports.

- 8.3.6 Contractor shall generally offer material for inspection as per supply bar chart approved by POWERGRID and not before 30 days from schedule indicated in the bar chart. In case Contractor offers material(s) for inspection prior to 30 days from the scheduled date with necessary approval of POWERGRID, POWERGRID shall inspect the material and issue CIP only. However, in such an exceptional case, MICC shall be issued only as per provision of original / revised approved supply schedule.
- 8.3.7 Contractor shall minimize the number of inspection calls by offering optimum quantities in each inspection call at the respective manufacturer's works.
- 8.3.8 Contractor shall inspect the material themselves and only after they are fully convinced about the Quality, they shall offer the material for POWERGRID inspection and shall also ensure that relevant portion of LOA/NOA, approved drawing and data sheets along with applicable Quality Plans are available at the works of Contractor or their Sub-vendor before the material is offered for inspection.
- 8.3.9 Contractor shall ensure that material which has been cleared for dispatch after inspection will be dispatched within 30 days in case of domestic supplies and within 60 days in case of Off-shore supplies from the date of issuance of CIP. Material which is not dispatched within stipulated time as above will be reoffered for POWERGRID inspection or specific approval of POWERGRID QA&I shall be obtained for delayed dispatch.
- 8.3.10 The Employer or IE shall give notice in writing to the Contractor, of any objection either to conformance to any drawings or to any equipment and workmanship which in his opinion is not in accordance with the Contract. The Contractor shall give due consideration to such objections and shall either make the modifications that may be necessary to meet the said objections or shall confirm in writing to the Employer/Inspection Engineer giving reasons therein, that no modifications are necessary to comply with the Contract.
- 8.3.11 All Test Reports and documents to be submitted in English during final inspection of equipment by POWERGRID or as and when required for submission.
- 8.3.12 When the factory tests have been completed at the Contractor's or Sub-Contractor's works, the Employer/Inspection Engineer (IE) shall issue a certificate to this effect within fifteen (15) days after completion of tests & submission of documents by Contractor/manufacturer but if the tests are not witnessed by the Employer/IE, the certificate shall be issued within fifteen (15) days of receipt of the Contractor's Test certificate by the Employer/IE. Contractor shall, on completion of all tests, submit test

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

reports within Ten (10) days to POWERGRID IE. Failure of the Employer/IE to issue such a certificate shall not prevent the Contractor from proceeding with the Works. The completion of these tests or the issue of the certificate shall not bind the Employer to accept the equipment should, it, on further tests after erection, be found not to comply with the Contract.

- 8.3.13 In all cases, where the Contract provides for tests whether at the premises or works of the Contractor or of any Sub- Contractor, the Contractor, except where otherwise specified, shall provide free of charge such items as labour, materials, electricity, fuel, water, stores, apparatus and instruments as may be reasonably demanded by the Employer/Inspector or his authorised representative to carry out effectively such tests of the equipment in accordance with the Contract and shall give facilities to the Employer/Inspection Engineer or to his authorised representative to accomplish testing.
- 8.3.14 The inspection and acceptance by Employer and issue of Inspection Certificate thereon shall in no way limit the liabilities and responsibilities of the Contractor in respect of the agreed quality assurance programme forming a part of the Contract, or if such equipment is found to be defective at a later stage.
- 8.3.15 The Employer will have the right of having at his own expenses any other test(s) of reasonable nature carried out at Contractor's premises or at site or in any other place in addition of aforesaid type and routine tests, to satisfy that the material comply with the specification.
- 8.3.16 The Employer reserves the right for getting any additional field tests conducted on the completely assembled equipment at site to satisfy that material complies with specifications.
- 8.3.17 Rework/ Re-engineering, if any, on any item/equipment shall be carried out only after mutual discussions and in accordance with mutually agreed procedure. Contractor shall submit Joint Inspection Report of equipments under Re-Work/Re-Engineering alongwith procedure for the same to POWERGRID for approval, before taking up the Re-Work/Re-Engineering, failing which POWERGRID reserves the right to reject the equipment.
- 8.3.18 Contractor may establish a field test Laboratory to execute Civil Construction testing requirements at site with the condition that all testing equipment shall be calibrated from POWERGRID approved accredited Testing laboratories, with calibration certificates kept available at site and all testing personnel employed in the Field Testing Laboratories to be qualified and experienced Engineers or testing to be carried out at POWERGRID approved Third Party Laboratories.
- 8.3.19 Contractor shall ensure that all possible steps are taken to avoid damages to the equipment during transport, storage and erection.
- 8.3.20 Contractor shall implement additional stringent quality checks and preparation during installation of GIS at site (if applicable) as per POWERGRID approved guidelines/Technical specifications.
- 8.3.21 Contractor shall ensure commissioning of all CSDs along with Circuit Breakers wherever applicable.
- 8.3.22 For EHV transformers/reactors:**
- Insulation oil shall be as per POWERGRID Technical specifications and same grade shall be used for impregnation of the active part & testing at the works of Transformer/Reactor Manufacturer and as well as for filling the Transformer/Reactors at site. Contractor to ensure that windings for Transformer/Reactors are made in air-conditioned environment. Core-coil assembly shall be performed in positive

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

pressurized dust controlled environment. Dust measurements shall be monitored regularly at Transformer / Reactor Manufacturer works. Contractor shall ensure that respective civil foundations & Fire walls for Transformer/Reactors units to be commissioned, shall be made ready at concerned sites before receipt of Transformer/Reactors units. All the requisite material for Neutral & Delta Bus formation required for charging of complete bank of 765KV class 1-ph Transformer/Reactor units shall be made available at the concerned sites before receipt of the Transformer/Reactor units at site.

- 8.3.23 The Employer reserves the right to increase or decrease their involvement in inspections at Contractor's Works or at his Sub-Contractor's premises or at the Employer's site or at any other place of Work based on performance of Contractor/sub-Contractor.

9.0 TYPE TESTING & CLEARANCE CERTIFICATE

- 9.1 All equipment being supplied shall conform to type tests as per technical specification and shall be subject to routine tests in accordance with requirements stipulated under respective sections.

- 9.2 The reports for all type tests as per technical specification shall be furnished by the Contractor alongwith equipment / material drawings. However, type test reports of similar equipments/ material already accepted in POWERGRID shall be applicable for all projects with similar requirement. The type tests conducted earlier should have either been conducted in accredited laboratory (accredited based on ISO / IEC Guide 25 / 17025 or EN 45001 by the national accreditation body of the country where laboratory is located) or witnessed by POWERGRID or representative authorized by POWERGRID or Utility or representative of accredited test lab.

Unless otherwise specified elsewhere, the type test reports submitted shall be of the tests conducted within last 10 (ten) years from the date of NOA. In case the test reports are of the test conducted earlier than 10 (ten) years from the date of NOA, the contractor shall repeat these test(s) at no extra cost to the Employer.

Further, in the event of any discrepancy in the test reports i.e. any test report not acceptable due to any design/manufacturing changes or due to non-compliance with the requirement stipulated in the Technical Specification or any/all type tests not carried out, same shall be carried out without any additional cost implication to the Employer.

The Contractor shall intimate the Employer the detailed program about the type tests atleast two (2) weeks in advance in case of domestic supplies & six (6) weeks in advance in case of foreign supplies.

- 9.3 The Employer intends to repeat those type tests which are indicated in the price schedule and the same shall be payable as per provision of contract. The price of conducting type tests shall be included in Bid price and break up of these shall be given in the relevant schedule of Bid Proposal Sheets. These Type test charges would be considered in bid evaluation. In case Bidder does not indicate charges for any of the type tests or does not mention the name of any test in the price schedules, it will be presumed that the particular test has been offered free of charge. Further, in case any Bidder indicates that he shall not carry out a particular test, his offer shall be considered incomplete and shall be liable to be rejected. The Employer reserves the right to waive the repeating of type tests partly or fully and in case of waiver, test charges for the same shall not be payable.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- 9.4 The Employer reserves the right to witness any or all the type tests. The Employer shall bear all expenses for deputation of Employer's representative(s) for witnessing the type tests.
- 9.5 **The list of makes of various items, for which Type test reports are not required to be submitted are specified in Compendium of Vendors (COV).**
- 10.0 **TESTS**
- 10.1 **Pre-commissioning Tests**
- On completion of erection of the equipment and before charging, each item of the equipment shall be thoroughly cleaned and then inspected jointly by the Employer and the Contractor for correctness and completeness of installation and acceptability for charging, leading to initial pre-commissioning tests at Site. The list of pre-commissioning tests to be performed are given in respective chapters and shall be included in the Contractor's quality assurance programme.
- 10.2 **Commissioning Tests**
- 10.2.1 The available instrumentation and control equipment will to be used during such tests and the Employer will calibrate, all such measuring equipment and devices as far as practicable.
- 10.2.2 Any special equipment, tools and tackles required for the successful completion of the Commissioning Tests shall be arranged by the Contractor at his own cost.
- 10.2.3 The specific tests requirement on equipment have been brought out in the respective chapters of the technical specification.
- 10.3.4 **PRECOMMISSIONING, COMMISSIONING, TRIAL-RUN & COMPLETION**
- As soon as the Facilities covered by these specifications are physically completed in all respects, the Pre commissioning, Commissioning, Trial-run and Completion of the Facilities, as mentioned below, shall be attained in accordance with the procedure given in the Conditions of Contract, Vol.-I of the Bidding Documents.
- (i) Pre commissioning : As per relevant Sections
- (ii) Commissioning : Charging of the Facilities at rated voltage.
- Further, wherever appearing in these specifications, the words-'commissioning checks', 'installation checks', 'site tests', 'performance guarantee tests for fire protection system', are to be considered as 'pre commissioning checks'.
- (iii) Trial-run : Operation of the Facilities or any part thereof by the Contractor immediately after the Commissioning for a continuous period of 72 (Seventy two) hours continuously. In case of interruption due to problem/failure in the respective equipment, the contractor shall rectify the problem and after rectification, continuous 72 (Seventy two) hours period start after such rectification.
- (iv) Completion : Upon successful completion of Trial-run.
- 'Guarantee Test(s)' and/or 'Functional Guarantees' are applicable only for Substation Automation System as specified in Section-'Substation Automation System.'
- 10.3. The Contractor shall be responsible for obtaining statutory clearances from the concerned authorities for commissioning the equipment and the switchyard. However necessary fee shall be reimbursed by POWERGRID on production of requisite documents.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

11.0 PACKAGING & PROTECTION

- 11.1 All the equipments shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at Site till the time of erection. On request of the Employer, the Contractor shall also submit packing details/associated drawing for any equipment/material under his scope of supply, to facilitate the Employer to repack any equipment/material at a later date, in case the need arises. While packing all the materials, the limitation from the point of view of availability of Railway wagon sizes in India should be taken into account. The Contractor shall be responsible for any loss or damage during transportation, handling and storage due to improper packing. Any demurrage, wharfage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor. Employer takes no responsibility of the availability of the wagons.
- 11.2 All coated surfaces shall be protected against abrasion, impact, discolouration and any other damages. All exposed threaded portions shall be suitably protected with either a metallic or a non-metallic protecting device. All ends of all valves and pipings and conduit equipment connections shall be properly sealed with suitable devices to protect them from damage.

12.0 FINISHING OF METAL SURFACES

- 12.1 All metal surfaces shall be subjected to treatment for anti-corrosion protection. All ferrous surfaces for external use unless otherwise stated elsewhere in the specification or specifically agreed, shall be hot-dip galvanized after fabrication. All steel conductors including those used for earthing/grounding (above ground level) shall also be galvanized according to IS: 2629.

12.2 HOT DIP GALVANISING

- 12.2.1 The minimum weight of the zinc coating shall be 610 gm/sq.m and minimum average thickness of coating shall be 86 microns for all items having thickness 6mm and above **and 900 gm/sq.m for coastal area (30km from sea shore approximately) or as specified in Section-Project**. For items lower than 6mm thickness requirement of coating thickness shall be as per relevant ASTM. For surface which shall be embedded in concrete, the zinc coating shall be 610 gm/sq.m minimum **and 900 gm/sq.m for coastal area as specified in Section-Project**.
- 12.2.2 The galvanized surfaces shall consist of a continuous and uniform thick coating of zinc, firmly adhering to the surface of steel. The finished surface shall be clean and smooth and shall be free from defects like discoloured patches, bare spots, unevenness of coating, spelter which is loosely attached to the steel globules, spiky deposits, blistered surface, flaking or peeling off, etc. The presence of any of these defects noticed on visual or microscopic inspection shall render the material liable to rejection.
- 12.2.3 After galvanizing, no drilling or welding shall be performed on the galvanized parts of the equipment excepting that nuts may be threaded after galvanizing. Sodium dichromate or alternate approved treatment shall be provided to avoid formation of white rust after hot dip galvanization.
- 12.2.4 The galvanized steel shall be subjected to four numbers of one minute dips in copper sulphate solution as per IS-2633.
- 12.2.5 Sharp edges with radii less than 2.5 mm shall be able to withstand four immersions of the Standard Preece test. All other coatings shall withstand six immersions. The following galvanizing tests should essentially be performed as per relevant Indian Standards.
- Coating thickness
 - Uniformity of zinc

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- Adhesion test
 - Mass of zinc coating
- 12.2.6 Galvanised material must be transported properly to ensure that galvanised surfaces are not damaged during transit. Application of touch-up zinc rich paint at site shall be allowed with approval of Engineer Incharge.
- 12.3 PAINTING**
- 12.3.1 All sheet steel work shall be degreased, pickled, phosphated in accordance with the IS-6005 "Code of practice for phosphating iron and sheet". All surfaces, which will not be easily accessible after shop assembly, shall beforehand be treated and protected for the life of the equipment. The surfaces, which are to be finished painted after installation or require corrosion protection until installation, shall be shop painted with at least two coats of primer. Oil, grease, dirt and swarf shall be thoroughly removed by emulsion cleaning. Rust and scale shall be removed by pickling with dilute acid followed by washing with running water, rinsing with slightly alkaline hot water and drying.
- 12.3.2 After phosphating, thorough rinsing shall be carried out with clean water followed by final rinsing with dilute dichromate solution and oven drying. The phosphate coating shall be sealed with application of two coats of ready mixed, stoving type zinc chromate primer. The first coat may be "flash dried" while the second coat shall be stoved.
- 12.3.3 After application of the primer, two coats of finishing synthetic enamel paint shall be applied, each coat followed by stoving. The second finishing coat shall be applied after inspection of first coat of painting.
- 12.3.4 The exterior and interior colour of the paint in case of new substations shall preferably be RAL 7032 for all equipment, marshalling boxes, junction boxes, control cabinets, panels etc. unless specifically mentioned under respective sections of the equipments. Glossy white colour inside the equipments /boards /panels/junction boxes is also acceptable. The exterior colour for panels shall be matching with the existing panels in case of extension of a substation. Each coat of primer and finishing paint shall be of slightly different shade to enable inspection of the painting. A small quantity of finishing paint shall be supplied for minor touching up required at site after installation of the equipments.
- 12.3.5 In case the contractor proposes to follow his own standard surface finish and protection procedures or any other established painting procedures, like electrostatic painting etc., the procedure shall be submitted during detailed engineering for Employer's review & approval.
- 12.3.6 The colour scheme as given below shall be followed for Fire Protection and Air Conditioning systems

S.No.	PIPE LINE	Base colour	Band colour
<u>Fire Protection System</u>			
1	Hydrant and Emulsifier system pipeline	FIRE RED	-
2	Emulsifier system detection line – water	FIRE RED	Sea Green
3	Emulsifier system detection line –Air	FIRE RED	Sky Blue
4	Pylon support pipes	FIRE RED	
<u>Air Conditioning Plant</u>			
5	Refrigerant gas pipeline – at compressor suction	Canary Yellow	-

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

S.No.	PIPE LINE	Base colour	Band colour
6	Refrigerant gas pipeline – at compressor discharge	Canary Yellow	Red
7	Refrigerant liquid pipeline	Dark Admiralty Green	-
8	Chilled water pipeline	Sea Green	-
9	Condenser water pipeline	Sea Green	Dark Blue

The direction of flow shall be marked by → (arrow) in black colour.



Base Colour Direction of flow Band Colour

- 12.3.7 For aluminium casted surfaces, the surface shall be with smooth finish. Further, in case of aluminium enclosures, the surface shall be coated with powder (coating thickness of 60 microns) after surface preparation for painting. For stainless steel surfaces, no painting is envisaged.

13.0 HANDLING, STORING AND INSTALLATION

- 13.1 In accordance with the specific installation instructions as shown on manufacturer's drawings or as directed by the Employer or his representative, the Contractor shall unload, store, erect, install, wire, test and place into commercial use all the equipment included in the contract. Equipment shall be installed in a neat, workmanlike manner so that it is level, plumb, square and properly aligned and oriented. Commercial use of switchyard equipment means completion of all site tests specified and energisation at rated voltage.

- 13.2 Contractor may engage manufacturer's Engineers to supervise the unloading, transportation to site, storing, testing and commissioning of the various equipment being procured by them separately. Contractor shall unload, transport, store, erect, test and commission the equipment as per instructions of the manufacturer's supervisory Engineer(s) and shall extend full cooperation to them.

- 13.3 The contractor must ensure that the open storage platform (as per Drawing No. C-ENGG-CVL-STD-PLATFORM-01, Rev.0) is constructed for storage of outdoor type equipment/material prior to commencement of delivery at site. Outdoor equipment shall be stored on open storage platform, properly covered with waterproof and dustproof covers to protect them from water seepage and moisture ingress.

However, all indoor equipments including control & protection panels, Communication equipments and operating mechanism boxes etc. of outdoor equipments shall be stored indoors.

Storage of equipment on top of another one is not permitted if the wooden packing is used and there is possibility of equipment/packing damage. Material opened for joint inspection shall be repacked properly as per manufacturer's recommendations.

During storage of material regular periodic monitoring of important parameters like oil level / leakage, SF6 / Nitrogen pressure etc. shall be ensured by the contractor.

- 13.4 In case of any doubt/misunderstanding as to the correct interpretation of manufacturer's drawings or instructions, necessary clarifications shall be obtained from the Employer. Contractor shall be held responsible for any damage to the equipment consequent to not following manufacturer's drawings/instructions correctly.

- 13.5 Where assemblies are supplied in more than one section, Contractor shall make all necessary mechanical and electrical connections between sections including the connection between buses. Contractor shall also do necessary adjustments/alignments

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

for proper operation of circuit breakers, isolators and their operating mechanisms. All components shall be protected against damage during unloading, transportation, storage, installation, testing and commissioning. Any equipment damaged due to negligence or carelessness or otherwise shall be replaced by the Contractor at his own expense.

- 13.6 Contractor shall be responsible for examining all the shipment and notify the Employer immediately of any damage, shortage, discrepancy etc. for the purpose of Employer's information only. The Contractor shall submit to the Employer every week a report detailing all the receipts during the weeks. However, the Contractor shall be solely responsible for any shortages or damages in transit, handling and/or in storage and erection of the equipment at Site. Any demurrage, wharfage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor.
- 13.7 The Contractor shall be fully responsible for the equipment/material until the same is handed over to the Employer in an operating condition after commissioning. Contractor shall be responsible for the maintenance of the equipment/material while in storage as well as after erection until taken over by Employer, as well as protection of the same against theft, element of nature, corrosion, damages etc.
- 13.8 Where material / equipment is unloaded by Employer before the Contractor arrives at site or even when he is at site, Employer by right can hand over the same to Contractor and there upon it will be the responsibility of Contractor to store the material in an orderly and proper manner.
- 13.9 The Contractor shall be responsible for making suitable indoor storage facilities, to store all equipment which requires indoor storage.
- 13.10 The words 'erection' and 'installation' used in the specification are synonymous.
- 13.11 Exposed live parts shall be placed high enough above ground to meet the requirements of electrical and other statutory safety codes.
- 13.12 The design and workmanship shall be in accordance with the best engineering practices to ensure satisfactory performance throughout the service life. If at any stage during the execution of the Contract, it is observed that the erected equipment(s) do not meet the above minimum clearances the Contractor shall immediately proceed to correct the discrepancy at his risks and cost.
- 13.13 Equipment Bases**
- A cast iron or welded steel base plate shall be provided for all rotating equipment which is to be installed on a concrete base unless otherwise agreed to by the Employer. Each base plate shall support the unit and its drive assembly, shall be of a neat design with pads for anchoring the units, shall have a raised lip all around, and shall have threaded drain connections.
- 14.0 TOOLS**
- 14.1 TOOLS & PLANTS (T&P)**
- The Contractor shall arrange all T&P (such as necessary supports, cranes, ladders, platforms etc.) for erection, testing & commissioning of the system at his own cost. Further, all consumables, wastage and damages shall be to the account of contractor.
- All such T&P shall be taken back by the contractor after commissioning of the system.
- 14.2 SPECIAL TOOLS AND TACKLES**
- The contractor shall supply all special tools and tackles required for Operation and maintenance of equipment. The special tools and tackles shall only cover items which

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

are specifically required for the equipment offered and are proprietary in nature. The list of special tools and tackles, if any, shall be finalized during detail engineering and the same shall be supplied without any additional cost implication to the Employer.

14.3 FACILITIES TO BE PROVIDED BY THE EMPLOYER

14.3.1 Employer shall make available the auxiliary supplies at a single point in the substation on chargeable basis. The prevailing energy rates of the state shall be applicable. All further distribution from the same for construction supply shall be made by the contractor. However, in case of failure of power due to any unavoidable circumstances, the contractor shall make his own necessary arrangements like diesel generator sets etc. at his own cost so that progress of work is not affected and Employer shall in no case be responsible for any delay in works because of non-availability of power.

14.3.2 Employer shall make available construction water supply at a single point in the substation. All further distribution for the same shall be made by the Contractor. In case of non-availability or inadequate availability of water for construction work, the contractor shall make his own arrangement at his own cost and the Employer shall in no case be responsible for any delay in works because of non-availability or inadequate availability of water.

15.0 AUXILIARY SUPPLY

15.1 The auxiliary power for station supply, including the equipment drive, cooling system of any equipment, air-conditioning, lighting etc shall be designed for the specified Parameters as under. The DC supply for the instrumentation and PLCC system shall also conform the parameters as indicated in the following table:

Normal Voltage	Variation in Voltage	Frequency in HZ	Phase/Wire	Neutral connection
415V	± 10%	50 ± 5%	3/4 Wire	Solidly Earthed.
240V	± 10%	50 ± 5%	1/2 Wire	Solidly Earthed.
220V	190V to 240V	DC	Isolated 2 wire System	-
110V	95V to 120V	DC	Isolated 2 wire System	-
48V	--	DC	2 wire system (+) earthed	-

Combined variation of voltage and frequency shall be limited to ± 10%.

16.0 SUPPORT STRUCTURE

16.1 The equipment support structures shall be suitable for equipment connections at the first level i.e 14.0 meter, 8.0 meter, 5.9 meter and 4.6 meter from plinth level for 765kV, 400kV, 220kV and 132kV substations respectively. All equipment support structures shall be supplied alongwith brackets, angles, stools etc. for attaching the operating mechanism, control cabinets & marshalling box (wherever applicable) etc.

16.2 The minimum vertical distance from the bottom of the lowest porcelain part of the bushing, porcelain enclosures or supporting insulators to the bottom of the equipment base, where it rests on the foundation pad shall be 2.55 metres.

17.0 CLAMPS AND CONNECTORS INCLUDING TERMINAL CONNECTORS

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- 17.1 All power clamps and connectors shall conform to IS:5561 or other equivalent international standard and shall be made of materials listed below :

Sl. No.	Description	Materials
a)	For connecting ACSR conductors/AAC conductors/ Aluminium tube	Aluminum alloy casting, conforming to designation A6 of IS:617 and all test shall conform to IS:617
b)	For connecting equipment terminals mad of copper with ACSR conductors/AAC conductors/ Aluminium tube	Bimetallic connectors made from aluminum alloy casting, conforming to designation A6 of IS:617 with 2mm thick bimetallic liner/strip and all test shall conform to IS:617
c)	For connecting G.I	Galvanised mild steel shield wire
d)	Bolts, nuts & plain washers	Electro-galvanised for sizes below M12, for others hot dip galvanised.
e)	Spring washers	Electro-galvanised mild steel suitable for atleast service condition-3 as per IS:1573

- 17.2 Necessary clamps and connectors shall be supplied for all equipment and connections. If corona rings are required to meet these requirements they shall be considered as part of that equipment and included in the scope of work.
- 17.3 Where copper to aluminum connections are required, bi-metallic clamps shall be used, which shall be properly designed to ensure that any deterioration of the connection is kept to a minimum and restricted to parts which are not current carrying or subjected to stress.
- 17.4 Low voltage connectors, grounding connectors and accessories for grounding all equipment as specified in each particular case, are also included in the scope of Work.
- 17.5 No current carrying part of any clamp shall be less than 10 mm thick. All ferrous parts shall be hot dip galvanised. Copper alloy liner/strip of minimum 2 mm thickness shall be cast integral with aluminum body or 2 mm thick bi-metallic liner/strips shall be provided for Bi-metallic clamps.
- 17.6 All casting shall be free from blow holes, surface blisters, cracks and cavities. All sharp edges and corners shall be blurred and rounded off.
- 17.7 Flexible connectors, braids or laminated straps made for the terminal clamps for bus posts shall be suitable for both expansion or through (fixed/sliding) type connection of IPS AL tube as required. In both the cases the clamp height (top of the mounting pad to centre line of the tube) should be same.
- 17.8 Current carrying parts (500A and above) of the clamp/connector shall be provided with minimum four numbers of bolts preferably for 132kV & above.
- 17.9 All current carrying parts shall be designed and manufactured to have minimum contact resistance.
- 17.10 Power Clamps and connectors shall be designed to control corona as per requirement.

17.11 Tests

Clamps and connectors should be type tested as per IS:5561 and shall also be subjected to routine tests as per IS:5561. Following type test reports shall be submitted for

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

approval. Type test once conducted shall hold good. The requirement of test conducted within last ten years, shall not be applicable.

- i) Temperature rise test (maximum temperature rise allowed is 35°C over 50°C ambient)
- ii) Short time current test
- iii) Corona (dry) [for 400kV and above] and RIV (dry) test [for 132kV and above voltage level clamps]
- iv) Resistance test and tensile test

18.0 CONTROL CABINETS, JUNCTION BOXES, TERMINAL BOXES & MARSHALLING BOXES FOR OUTDOOR EQUIPMENT

- 18.1 All types of boxes, cabinets etc. shall generally conform to & be tested in accordance with IS-5039/IS-8623, IEC-60439, as applicable, and the clauses given below:
- 18.2 Control cabinets, junction boxes, Marshalling boxes & terminal boxes shall be made of stainless steel of atleast 1.5 mm thick or aluminum enclosure of atleast 1.6 mm thick and shall be dust, water and vermin proof. Stainless steel used shall be of grade SS304 (SS316 for coastal area) or better. The box shall be properly braced to prevent wobbling. There shall be sufficient reinforcement to provide level surfaces, resistance to vibrations and rigidity during transportation and installation. In case of aluminum enclosed box the thickness of aluminum shall be such that it provides adequate rigidity and long life as comparable with sheet steel of specified thickness.
- 18.3 A canopy and sealing arrangements for operating rods shall be provided in marshalling boxes / Control cabinets to prevent ingress of rain water.
- 18.4 Cabinet/boxes shall be provided with double hinged doors with padlocking arrangements. The distance between two hinges shall be adequate to ensure uniform sealing pressure against atmosphere.
- 18.5 All doors, removable covers and plates shall be gasketed all around with suitably profiled EPDM/Neoprene/PU gaskets. The gasket shall be tested in accordance with approved quality plan, IS:11149 and IS:3400. Ventilating Louvers, if provided, shall have screen and filters. The screen shall be fine wire mesh made of brass.
- Further, the gasketing arrangement shall be such that gaskets are pasted in slots (in door fabrication/gasket itself) in order to prevent ingress of dust and moisture inside the panels so that no internal rusting occurs in panels during the operation of the equipment.
- 18.6 All boxes/cabinets shall be designed for the entry of cables by means of weather proof and dust-proof connections. Boxes and cabinets shall be designed with generous clearances to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the box or cabinet. Suitable cable gland plate above the base of the marshalling kiosk/box shall be provided for this purpose along with the proper blanking plates. Necessary number of cable glands shall be supplied and fitted on this gland plate. Gland plate shall have provision for some future glands to be provided later, if required. The Nickel plated glands shall be dust proof, screw on & double compression type and made of brass. The gland shall have provision for securing armour of the cable separately and shall be provided with earthing tag. The glands shall conform to BS:6121.
- 18.7 A 240V, single phase, 50 Hz, 15 amp AC plug and socket shall be provided in the cabinet with ON-OFF switch for connection of hand lamps. Plug and socket shall be of industrial grade.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

- 18.8 LED based illumination of minimum 9 watts shall be provided. The switching of the fittings shall be controlled by the door switch.
- For junction boxes of smaller sizes such as lighting junction box, manual operated earth switch mechanism box etc., plug socket, heater and illumination is not required to be provided.
- 18.9 All control switches shall be of MCB/rotary switch type and Toggle/piano switches shall not be accepted.
- 18.10 Earthing of the cabinet shall be ensured by providing two separate earthing pads. The earth wire shall be terminated on to the earthing pad and secured by the use of self etching washer. Earthing of hinged door shall be done by using a separate earth wire.
- 18.11 The bay marshalling kiosks shall be provided with danger plate and a diagram showing the numbering/connection/feruling by pasting the same on the inside of the door.
- 18.12 The following routine tests alongwith the routine tests as per IS:5039 shall also be conducted:
- i) Check for wiring
 - ii) Visual and dimension check
- 18.13 The enclosure of bay marshalling kiosk, junction box, terminal box and control cabinets shall conform to IP-55 as per IS:13947 including application of 2KV rms for 1 (one) minute, insulation resistance and functional test after IP-55 test.
- 19.0 DISPOSAL OF PACKING MATERIAL & WASTE FROM CONSTRUCTION SITE**
- After completion of the work, Contractor shall dispose-off all the packing & waste materials including empty conductor drums, cable drums, wooden containers, oil drums, gas cylinders and other waste/scrapped materials from construction site at his own cost and shall make the substation area properly cleaned.
- 20.0 TERMINAL BLOCKS AND WIRING**
- 20.1 Control and instrument leads from the switchboards or from other equipment will be brought to terminal boxes or control cabinets in conduits. All interphase and external connections to equipment or to control cubicles will be made through terminal blocks.
- 20.2 Terminal blocks shall be 650V grade and have continuous rating to carry the maximum expected current on the terminals and non-breakable type. These shall be of moulded piece, complete with insulated barriers, stud type terminals, washers, nuts and lock nuts. Screw clamp, overall insulated, insertion type, rail mounted terminals can be used in place of stud type terminals. But the terminal blocks shall be non-disconnecting stud type except for the secondary junction boxes of Current Transformer and Voltage Transformer.
- 20.3 Terminal blocks for current transformer and voltage transformer secondary leads shall be provided with test links and isolating facilities. The current transformer secondary leads shall also be provided with short circuiting and earthing facilities.
- 20.4 The terminal shall be such that maximum contact area is achieved when a cable is terminated. The terminal shall have a locking characteristic to prevent cable from escaping from the terminal clamp unless it is done intentionally.
- 20.5 The conducting part in contact with cable shall preferably be tinned or silver plated however Nickel plated copper or zinc plated steel shall also be acceptable.
- 20.6 The terminal blocks shall be of extensible design, multilayer terminal arrangement is not allowed in any junction box (Common MB, Individual MB, JB etc.). There should be

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

sufficient space at both sides of terminals so that ferrule number of wires / TB numbers are clearly visible during wire removal or insertion.

- 20.7 The terminal blocks shall have locking arrangement to prevent its escape from the mounting rails.
- 20.8 The terminal blocks shall be fully enclosed with removable covers of transparent, non-deteriorating type plastic material. Insulating barriers shall be provided between the terminal blocks. These barriers shall not hinder the operator from carrying out the wiring without removing the barriers.
- 20.9 Unless otherwise specified terminal blocks shall be suitable for connecting the following conductors on each side.
- | | | |
|----|------------------------------------|---|
| a) | All circuits except CT/PT circuits | Minimum of two of 2.5 sq mm copper flexible. |
| b) | All CT/PT circuits | Minimum of 4 nos. of 2.5 sq mm copper flexible. |
- 20.10 The arrangements shall be in such a manner so that it is possible to safely connect or disconnect terminals on live circuits and replace fuse links when the cabinet is live.
- 20.11 Atleast 20 % spare terminals shall be provided on each panel/cubicle/box and these spare terminals shall be uniformly distributed on all terminals rows.
- 20.12 There shall be a minimum clearance of 250 mm between the First/bottom row of terminal block and the associated cable gland plate for outdoor ground mounted marshalling box and the clearance between two rows of terminal blocks shall be a minimum of 150 mm.
- 20.13 The Contractor shall furnish all wire, conduits and terminals for the necessary interphase electrical connections (where applicable) as well as between phases and common terminal boxes or control cabinets. For equipments rated for 400 kV and above the wiring required in these items shall be run in metallic ducts or shielded cables in order to avoid surge overvoltages either transferred through the equipment or due to transients induced from the EHV circuits.
- 20.14 All input and output terminals of each control cubicle shall be tested for surge withstand capability in accordance with the relevant IEC Publications, in both longitudinal and transverse modes. The Contractor shall also provide all necessary filtering, surge protection, interface relays and any other measures necessary to achieve an impulse withstand level at the cable interfaces of the equipment.
- 21.0 LAMPS & SOCKETS**
- 21.1 Lamps & Sockets**
- All lamps shall use a socket base as per IS-1258, except in the case of signal lamps.
- All sockets (convenience outlets) shall be suitable to accept both 5 Amp & 15 Amp pin round Standard Indian plugs. They shall be switched sockets with shutters.
- 21.2 Hand Lamp:**
- A 240 Volts, single Phase, 50 Hz AC plug point shall be provided in the interior of each cubicle with ON-OFF Switch for connection of hand lamps.
- 21.3 Switches and Fuses:**
- 21.3.1 Each panel shall be provided with necessary arrangements for receiving, distributing, isolating and fusing of DC and AC supplies for various control, signaling, lighting and space heater circuits. The incoming and sub-circuits shall be separately provided with miniature circuit breaker / switch fuse units. Selection of the main and Sub-circuit fuse

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

ratings shall be such as to ensure selective clearance of sub-circuit faults. Potential circuits for relaying and metering shall be protected by HRC fuses.

- 21.3.2 All fuses shall be of HRC cartridge type conforming to IS:9228 mounted on plug-in type fuse bases. Miniature circuit breakers with thermal protection and alarm contacts will also be accepted. All accessible live connection to fuse bases shall be adequately shrouded. Fuses shall have operation indicators for indicating blown fuse condition. Fuse carrier base shall have imprints of the fuse rating and voltage.

22.0 Bushings, Hollow Column Insulators, Support Insulators:

- 22.1 Bushings shall be manufactured and tested in accordance with IS:2099 & IEC-60137 while hollow column insulators shall be manufactured and tested in accordance with IEC-62155/IS:5621. The support insulators shall be manufactured and tested as per IS:2544/IEC-60168 and IEC-60273. The insulators shall also conform to IEC-60815 as applicable.

The bidder may also offer composite hollow insulators, conforming to IEC-61462.

- 22.2 Support insulators, bushings and hollow column insulators shall be manufactured from high quality porcelain. Porcelain used shall be homogeneous, free from laminations, cavities and other flaws or imperfections that might affect the mechanical or dielectric quality and shall be thoroughly vitrified tough and impervious to moisture.

- 22.3 Glazing of the porcelain shall be uniform brown in colour, free from blisters, burrs and similar other defects.

- 22.4 Support insulators/bushings/hollow column insulators shall be designed to have ample insulation, mechanical strength and rigidity for the conditions under which they will be used.

- 22.5 When operating at normal rated voltage there shall be no electric discharge between the conductors and bushing which would cause corrosion or injury to conductors, insulators or supports by the formation of substances produced by chemical action. No radio interference shall be caused by the insulators/bushings when operating at the normal rated voltage.

- 22.6 Bushing porcelain shall be robust and capable of withstanding the internal pressures likely to occur in service. The design and location of clamps and the shape and the strength of the porcelain flange securing the bushing to the tank shall be such that there is no risk of fracture. All portions of the assembled porcelain enclosures and supports other than gaskets, which may in any way be exposed to the atmosphere shall be composed of completely non hygroscopic material such as metal or glazed porcelain.

- 22.7 All iron parts shall be hot dip galvanised and all joints shall be air tight. Surface of joints shall be trued up porcelain parts by grinding and metal parts by machining. Insulator/bushing design shall be such as to ensure a uniform compressive pressure on the joints.

22.8 Tests

In bushing, hollow column insulators and support insulators shall conform to type tests and shall be subjected to routine tests in accordance with IS:2099 & IS:2544 & IS:5621.

22.9 ~~RTV Coating on porcelain insulators (for coastal area)~~

~~RTV coating shall be done at site on all porcelain insulators (i.e. bushings, hollow and solid insulators, disc insulators etc.) for substation(s) in coastal area as defined elsewhere. The cost of RTV coating shall be deemed to be included in the respective~~

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

~~equipment/items' erection cost. The technical details of RTV coating is attached in Annexure H.~~

23.0 MOTORS

Motors shall be "Squirrel Cage" three phase induction motors of sufficient size capable of satisfactory operation for the application and duty as required for the driven equipment and shall be subjected to routine tests as per applicable standards. The motors shall be of approved make.

23.1 Enclosures

- a) Motors to be installed outdoor without enclosure shall have hose proof enclosure equivalent to IP-55 as per IS: 4691. For motors to be installed indoor i.e. inside a box, the motor enclosure, shall be dust proof equivalent to IP-44 as per IS: 4691.
- b) Two independent earthing points shall be provided on opposite sides of the motor for bolted connection of earthing conductor.
- c) Motors shall have drain plugs so located that they will drain water resulting from condensation or other causes from all pockets in the motor casing.
- d) Motors weighing more than 25 Kg. shall be provided with eyebolts, lugs or other means to facilitate lifting.

23.2 Operational Features

- a) Continuous motor rating (name plate rating) shall be at least ten (10) percent above the maximum load demand of the driven equipment at design duty point and the motor shall not be over loaded at any operating point of driven equipment that will rise in service.
- b) Motor shall be capable at giving rated output without reduction in the expected life span when operated continuously in the system having the particulars as given in Clause 15.0 of this Section.

23.3 Starting Requirements:

- a) All induction motors shall be suitable for full voltage direct-on-line starting. These shall be capable of starting and accelerating to the rated speed alongwith the driven equipment without exceeding the acceptable winding temperature even when the supply voltage drops down to 80% of the rated voltage.
- b) Motors shall be capable of withstanding the electrodynamic stresses and heating imposed if it is started at a voltage of 110% of the rated value.
- c) The locked rotor current shall not exceed six (6) times the rated full load current for all motors, subject to tolerance as given in IS:325.
- d) Motors when started with the driven equipment imposing full starting torque under the supply voltage conditions specified under Clause 15.0 shall be capable of withstanding atleast two successive starts from cold condition at room temperature and one start from hot condition without injurious heating of winding. The motors shall also be suitable for three equally spread starts per hour under the above referred supply condition.
- e) The locked rotor withstand time under hot condition at 110% of rated voltage shall be more than starting time with the driven equipment of minimum permissible voltage by at least two seconds or 15% of the accelerating time whichever is greater. In case it is not possible to meet the above requirement, the Bidder shall offer centrifugal type speed switch mounted on the motor shaft which shall remain closed for speed lower than 20% and open for speeds above

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

20% of the rated speed. The speed switch shall be capable of withstanding 120% of the rated speed in either direction of rotation.

23.4 Running Requirements:

- a) The maximum permissible temperature rise over the ambient temperature of 50 degree C shall be within the limits specified in IS:325 (for 3-phase induction motors) after adjustment due to increased ambient temperature specified.
- b) The double amplitude of motor vibration shall be within the limits specified in IS: 4729. Vibration shall also be within the limits specified by the relevant standard for the driven equipment when measured at the motor bearings.
- c) All the induction motors shall be capable of running at 80% of rated voltage for a period of 5 minutes with rated load commencing from hot condition.


23.5 TESTING AND COMMISSIONING

An indicative list of tests is given below. Contractor shall perform any additional test based on specialities of the items as per the field Q.P./Instructions of the equipment Contractor or Employer without any extra cost to the Employer. The Contractor shall arrange all instruments required for conducting these tests alongwith calibration certificates and shall furnish the list of instruments to the Employer for approval.

- (a) Insulation resistance.
- (b) Phase sequence and proper direction of rotation.
- (c) Any motor operating incorrectly shall be checked to determine the cause and the conditions corrected.

24.

24.1



SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)**ANNEXURE-A****CORONA AND RADIO INTERFERENCE VOLTAGE (RIV) TEST****1. General**

Unless otherwise stipulated, all equipment together with its associated connectors, where applicable, shall be tested for external corona (for 400kV & above) both by observing the voltage level for the extinction of visible corona under falling power frequency voltage and by measurement of radio interference voltage (RIV) for 132kV and above.

2. Test Levels:

The test voltage levels for measurement of external RIV and for corona extinction voltage are listed under the relevant clauses of the specification.

3. Test Methods for RIV:

3.1 RIV tests shall be made according to measuring circuit as per International Special-Committee on Radio Interference (CISPR) Publication 16-1(1993) Part -1. The measuring circuit shall preferably be tuned to frequency with 10% of 0.5 Mhz but other frequencies in the range of 0.5 MHz to 2 MHz may be used, the measuring frequency being recorded. The results shall be in microvolts.

3.2 Alternatively, RIV tests shall be carried out in accordance with relevant IEC of respective equipment or NEMA standard Publication No. 107-1964.

3.3 In measurement of, RIV, temporary additional external corona shielding may be provided. In measurements of RIV only standard fittings of identical type supplied with the equipment and a simulation of the connections as used in the actual installation will be permitted in the vicinity within 3.5 meters of terminals.

3.4 Ambient noise shall be measured before and after each series of tests to ensure that there is no variation in ambient noise level. If variation is present, the lowest ambient noise level will form basis for the measurements. RIV levels shall be measured at increasing and decreasing voltages of 85%, 100%, and 110% of the specified RIV test voltage for all equipment unless otherwise specified. The specified RIV test voltage for 765kV, 400 kV, 220 KV is listed in the detailed specification together with maximum permissible RIV level in microvolts.

3.5 The metering instruments shall be as per CISPR recommendation or equivalent device so long as it has been used by other testing authorities.

3.6 The RIV measurement may be made with a noise meter. A calibration procedure of the frequency to which noise meter shall be tuned shall establish the ratio of voltage at the high voltage terminal to voltage read by noise meter.

4. Test Methods for Visible Corona

The purpose of this test is to determine the corona extinction voltage of apparatus, connectors etc. The test shall be carried out in the same manner as RIV test described above with the exception that RIV measurements are not required during test and a search technique shall be used near the onset and extinction voltage, when the test voltage is raised and lowered to determine their precise values. The test voltage shall be raised to 110% of specified corona extinction voltage and maintained there for five minutes. In case corona inception does not take place at 110%, test shall be stopped, otherwise test shall be continued and the voltage will then be decreased slowly until

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)

ANNEXURE-A

all visible corona disappears. The procedure shall be repeated at least 4 times with corona inception and extinction voltage recorded each time. The corona extinction voltage for purposes of determining compliance with the specification shall be the lowest of the four values at which visible corona (negative or positive polarity) disappears. Photographs with laboratory in complete darkness shall be taken under test conditions, at all voltage steps i.e. 85%, 100%, and 110%. Additional photographs shall be taken at corona inception and extinction voltages. At least two views shall be photographed in each case using Panchromatic film with an ASA daylight rating of 400 with an exposure of two minutes at a lens aperture of f/5.6 or equivalent. The photographic process shall be such that prints are available for inspection and comparison with conditions as determined from direct observation. Photographs shall be taken from above and below the level of connector so as to show corona on bushing, insulators and all parts of energised connectors. The photographs shall be framed such that test object essentially, fills the frame with no cut-off.

For recording purpose, modern devices utilizing UV recording methods such as image intensifier may also be used.

- 4.1 The test shall be recorded on each photograph. Additional photograph shall be taken from each camera position with lights on to show the relative position of test object to facilitate precise corona location from the photographic evidence.
- 4.2 In addition to photographs of the test object preferably four photographs shall be taken of the complete test assembly showing relative positions of all the test equipment and test objects. These four photographs shall be taken from four points equally spaced around the test arrangement to show its features from all sides. Drawings of the laboratory and test set up locations shall be provided to indicate camera positions and angles. The precise location of camera shall be approved by Employer's inspector, after determining the best camera locations by trial energisation of test object at a voltage which results in corona.
- 4.3 The test to determine the visible corona extinction voltage need not be carried out simultaneously with test to determine RIV levels.
- 4.4 However, both test shall be carried out with the same test set up and as little time duration between tests as possible. No modification on treatment of the sample between tests will be allowed. Simultaneous RIV and visible corona extinction voltage testing may be permitted at the discretion of Employer's inspector if, in his opinion, it will not prejudice other test.

5. Test Records:

In addition to the information previously mentioned and the requirements specified as per CISPR or NEMA 107-1964 the following data shall be included in test report:

- a) Background noise before and after test.
- b) Detailed procedure of application of test voltage.
- c) Measurements of RIV levels expressed in micro volts at each level.
- d) Results and observations with regard to location and type of interference sources detected at each step.
- e) Test voltage shall be recorded when measured RIV passes through 100 microvolts in each direction.
- f) Onset and extinction of visual corona for each of the four tests required shall be recorded.

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)**ANNEXURE-B****SEISMIC WITHSTAND TEST PROCEDURE**

The seismic withstanding test on the complete equipment (for 132kV and above) shall be carried out alongwith supporting structure.

The Bidder shall arrange to transport the structure from his Contractor's premises/ POWERGRID sites for the purpose of seismic withstand test only.

The seismic level specified shall be applied at the base of the structure. The accelerometers shall be provided at the Terminal Pad of the equipment and any other point as agreed by the Employer. The seismic test shall be carried out in all possible combinations of the equipment. The seismic test procedure shall be furnished for approval of the Employer.

The frequency range for the earthquake spectra shall be as per IEC-6227-300.

COMPREHENSIVE LIST OF DRAWINGS		
8.09	GA of post insulator for isolator	R
8.10	Type Test Report	A
8.11	Instruction Manual	R
9.00	INSTRUMENT TRANSFORMER (CT/CVT/IVT)	
9.01	General Arrangement	A
9.02	GTP	A
9.03	Sectional view	R
9.04	Sec. terminal box GA	R
9.05	Wiring drawing of JB incl. interpole	R
9.06	Terminal pads	A
9.07	Schematic & rating plate	R
9.08	Porcelain insulator	R
9.09	Corona ring	R
9.10	Type Test Reports	A
9.11	Instruction Manual	R
10.00	SURGE ARRESTER	
10.01	GA of Surge Arrester	A
10.02	GTP	A
10.03	Porcelain/ Polymer insulator	R
10.04	Cross sectional view	R
10.05	Arrestor and unit name plate	A
10.06	Corona & Grading rings	R
10.07	Insulating base / surge counter detail	R
10.08	Outline drawing of surge counter	R
10.09	Circuit diagram of surge counter	R
10.10	GA drawing of ZnO element	R
10.11	Line terminal bracket with corona rings	R
10.12	Drawing showing pressure relief arrangement.	R
10.13	Type Test Report	A
10.14	Instruction Manual	R
11.00	BUS POST INSULATOR	
11.01	GA drawing & GTP	A
11.02	Type Test Reports	A
12.00	Marshalling Box, Junction Boxes	
12.01	GA drawings	A
12.02	Schematic drawings	A
12.03	Type Test Reports	A
13.00	CONDUCTOR, AL. TUBE & GS EARTH WIRE	
13.01	Type Test Reports (if applicable)	A

COMPREHENSIVE LIST OF DRAWINGS		
31.04	GIS Equipment foundation inside GIS building	
32.00	Switchyard Civil Construction Drawings (as applicable)	A
a)	Tower Foundation	
b)	Equipment Foundation	
c)	Transformer foundation	
d)	Reactor foundation	
e)	Road construction including culverts, rail cum road	
f)	Switchyard fencing & Gate	
g)	Cable trench section	
h)	Drain section	
i)	Rain harvesting	
j)	Boundary wall	
k)	DG set foundation	
l)	LT transformer foundation	
m)	Car Parking Shed/Security Room	
n)	Outdoor GIB foundation	
o)	Outdoor Sf6/Air bushing foundation	
p)	BMK/ Lighting pole foundation	
q)	Fire Wall	
r)	Drawing of contour levels	
s)	Drawing of Formation levels	
t)	Soil Investigation Report	
u)	Any other foundation inside switchyard	
33.00	DESIGN, FABRICATION & PROTO CORRECTED DRAWINGS OF ALL TYPES OF TOWERS & BEAMS	A/R
34.00	DESIGN, FABRICATION DRAWINGS FOR EQUIPMENT SUPPORT STRUCTURES	A/R
35.00	MISCELLANEOUS CIVIL DRGS	A/R

LEGEND:- A – for Approval; R- for Record

NOTES:-

- 1. In case any additional drawings/documents are required, the same shall also be submitted during execution of the contract.**
- 2. In case, some drawings as mentioned in the above list are not applicable for the scope of work, the same shall not be referred to.**

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)**Annexure-G****MQP & INSPECTION LEVEL REQUIREMENT**

Sl. No.	Item / Equipment	Requirement of MQP/ITP/FAT	Inspection Level
1 A	Transformer /Reactor	Yes	IV
1 B	Circuit Breakers	Yes	IV
2	Current transformer	Yes	IV
3	Capacitive voltage transformers/Potential transformer	Yes	IV
4	Isolators	Yes	IV
5	Lightening Arrestors	Yes	III
6	Line Trap	Yes	III
7	Control & Relay Panels	Yes	III
8	Power Cables	Yes	III
9	Control Cables	Yes	III
10	LT Switchgear & ACDB/DCDB/MLDB/ELDB/ Lighting Panels	Yes	III
11	Fire protection system		
11-A	Panels, Deluge valve, Hydro pneumatic tank.	No	III
11-B	Strainers, extinguishers, MS/GI pipes, Pumps, motors, air compressor, and other valves, Diesel Engines	No	II
11-C	Others	No	I
12	Insulator (Disc, Long Rod, Solid Core)	Yes	IV
13	Conductor	Yes	IV
14	Clamps & Connectors (including equipment connectors)	Yes	III
15	Junction Box / Lighting Switch Boards / Bay MB/Telecom Equipment Cabinet	No	II
16	Cable lugs	No	I
17	Lighting Fixtures ,Lamps & fans	No	I
18	Switches	No	I
19	Conduits	No	I
20	Lighting Poles	No	II
21	MS/GI /PVC Pipes for cable trenches and lighting	No	I
22	Hume Pipes	No	I
23	Galvanized Cable trays	No	II
24	MS/ GI Flat and earthing material	No	II
25	MS Round for Earthmat (40mm dia)	No	I
26	Lighting Earthwire	No	I
27	Aluminium Tube & Busbar materials	No	II
28	Outdoor Receptacle	No	I
29	Nut / Bolts / Spring Washers (Gr 5.6/5)	No	II
30	LT Transformer	Yes	III
31	Battery	No	II
32	Battery Charger	Yes	III

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)**Annexure-G**

Sl. No.	Item / Equipment	Requirement of MQP/ITP/FAT	Inspection Level
33	D. G. Set	No	II
34	Split A.C/window A.C.	No	I
35	Substation Automation system	No	III
36	Telephone wires	No	I
37	Telephone sockets	No	I
38	Aluminium ladder	No	I
39	Occupancy sensors for control of lighting	No	I
40	Sub Station Structure (lattice/pipe type)	Yes	III
41	HG fuse	No	II
42	PLCC equipment Viz PLCC Terminal ,Carrier equipment, Protection Coupler , Coupling Device but excluding EPAX / HF Cable/ SDH Equipment	Yes	III
43	HF Cable / GPS Clock	No	I
44	EPAX	No	I
45	Cable Glands / Joints /Clamps/ Termination	No	I
46	Video Monitoring System	No	II
47	Controller for switching	No	IV
48	Solar based street lighting pole including solar panel as per technical specification	No	III
49	Event Logger	No	III
50	Lighting transformers	Yes	II
51	String Hardware	Yes	IV
52	Test Equipment	No	I *
53	GS Earthwire	Yes	IV
54	Oil Storage Tank	Yes	III
55	Insulating Oil	No	III
56	Flow sensitive conservator isolation valve	No	II **
57	On-Line insulating oil drying system	No	II **
58	On line DGA & Moisture Analyzer	No	II **
59	WAMS-(PMU & Accessories)	Yes	III
60	FO Cable	Yes	III
61	Re-rollers of MS/HT Angle Section and galvanized tower parts.	Yes	IV
62	Hardware fittings & Earthwire Accessories	Yes	IV
63	OPGW & H/W	Yes	III
64	Bolts & Nuts Gr up to 5.6/5	Yes	II
65	Bolts & Nuts of Gr 8.8 / 8	Yes	IV
66	D-shackle/ Hanger / Links	Yes	IV
67	Danger Plate /Phase Plate / Number Plate / Circuit plate	No	I
68	Pipe Type & Counter Poise Earthing	No	II
69	Spring Washer	No	II
70	ACD & Barbed wire for ACD/Bird guard	No	II

SECTION-GENERAL TECHNICAL REQUIREMENTS (GTR)**Annexure-G**

Sl. No.	Item / Equipment	Requirement of MQP/ITP/FAT	Inspection Level
71	Span Marker & Obstruction Light	No	III
72	GIS including spares	Yes	IV
73	GIS Bus Duct	Yes	IV
74	GIS Bushing	Yes	IV
75	SF6 Gas processing Unit	No	II
76	Partial Discharge Monitoring System	No	II
77	STATCOM including Valve, valve base electronics, DC capacitor, series reactor and all accessories	Yes	IV
78	Mechanically switched Reactor bank (3-ph) including all accessories (MSR Branches)	Yes	IV
80	Mechanically switched Capacitor bank (3-ph) including all accessories (MSC Branches)	Yes	IV
81	Pass Harmonic filters	Yes	IV
82	Valve cooling system	Yes	III
	FODP including pigtail	No	II
	Radio link Telecom	Yes	III
	Hardware Fittings for Fibre Optic approach cable	Yes	III
	SDH Equipments (ADM), PDH, Primary Multiplexer	Yes	IV
	Drop & Insert Multiplexer	Yes	IV
	DACS	Yes	IV
	Main Distribution Frame	No	I
	HDPE Pipe	No	II
	NMS, TMN	Yes	IV
	Synchronization Equipment	No	Level-I
93	HT Capacitor	Yes	IV
94	PLC Capacitor	Yes	III
95	48V DCPS	Yes	III
96	Nitrogen Injection system	Yes	III
97	Foundation/Anchor bolts	Yes	III
98	EOT crane/Lift	No	II
99	Optical Signal Column	No	II
100	Maintenance Platform	No	II
101	Spark Gap	Yes	III
102	Thyristor Valve	Yes	III
103	DC current & voltage measuring device	ITP	III
104	Furniture	No	I

Note:

- * **MICC for test and measuring equipment shall be issued only after actual verification/demonstration of satisfactory performance at site.**
- ** **Though level-2 items, CIP can be issued also on review of TCs and visual inspection of these items.**

SECTION-5 **Marshalling Box**

CHECK LIST FOR INFORMATION TO BE FURNISHED WITH OFFER **RETURN THIS CHECKLIST AS PART OF THE OFFER DULY SIGNED**

The offer may not be considered if the following information and this Checklist are not enclosed with the Offer.

BHEL ENQUIRY. NO:

BIDDER:OFFER REFERENCE:

A)

(1)	(2)	(3)	(4)	(5)
S.No.	Parameters	Data	Yes	Remarks
1.	Applicable Standard	Latest IS -5039,IS-8623 or IEC-60439, IS-13947		
2.	Type			
3.0	Construction feature			
3.1	Thickness of material used	1.6 mm stainless steel Grade 304	Yes	
3.2	Degree of protection	IP 55 as per IS13947	Yes	
3.3	Control Wiring	2.5 mm ² , Stranded copper	Yes	
3.4	Space Heater / Lamp for illumination /Socket	Provided	Yes	
3.5	Distinct compartments for aux. Power circuits, interlocking circuit, receptacle (if applicable), CT& VT circuit (if applicable)	Provided	Yes	
4.0	Power circuit Incoming			
4.1	No. of AC Incomer feeders	Two ,	Yes	
4.2	Rating of Incomer feeders	63/ 100 amp, 3 - Phase, 4 - wire to be controlled by TPN/ 4-pole MCB	Yes	
4.3	Changeover between incomers	Automatic and a selector switch need to be provided for selecting the default Incomer out of the two incomers.	Yes	
4.4	Terminal blocks of Incomer	Equivalent Terminal blocks for making loop-in loop- out connection of 3.5 x 70 sq.mm connected cable.	Yes	
5.0	Power circuit - Outgoing			
5.2	Rating of AC outgoing feeder	a) 9 No : 16 amp, 3-phase, 4 - wire controlled by MCB b) 2 No. : 63A , 3phase 4 wire controlled by MCB c) 10 No. : 10A , 1 Phase 2 wire controlled by MCB	Yes	

(1)	(2)	(3)	(4)	(5)
S.No.	Parameters	Data	Yes	Remarks
5.3	Type of terminal blocks for 3-phase outgoing feeders	CBT M5 of Elmex / Eq.	Yes	
5.8	Type of terminal blocks for 1-phase outgoing feeders	CBT M5 of Elmex / Eq.	Yes	
5.9	Provision of spare TBs of each type for power circuit	20 %	Yes	
5.10	Contacts for remote alarm for supply fail (AC Incomer)	Provided	Yes	
6.0	Clearance between TBs			
6.1	Clearance between two rows of terminal blocks (End to End)	150 mm minimum	Yes	
6.2	Clearance between first/bottom row of terminal blocks and associated cable gland plate	250 mm minimum	Yes	
7	The kiosks shall be provided with danger plate and a diagram showing the numbering/connection/fe rruling by pasting the same on the inside of the door	Yes	Yes	
9	Door handle with integral lock & master key	Provided	Yes	
10	TBs fully enclosed with removable covers of transparent, non-deteriorating type plastic material	Provided	Yes	
11	Fixing Hardware (Nuts, Bolts and Washers) for mounting MK	Provided	Yes	
12	Base Frame for MK	Provided	Yes	
13.	Standard Approval	Powergrid standard approved documents to be followed at contract stage.	Yes	

B) TYPE TESTS

- i) Whether type test reports of the following test conducted earlier on identical or similar material are available (test reports are of the test conducted not earlier than 10 (ten) years from the date of NOA i.e.29.7.19).

(YES)

S.No.	TESTS	REPORT NO.	Date	Conducted at accredited laboratory or witnessed by independent authority
1	Degree of protection test IP 55			

- ii) If type test reports are not acceptable to BHEL/Customer then above tests shall be conducted by the bidder free of cost.

(YES)

C)

S.No.	Description	Confirmation of Supplier
1.	Bidder to confirm that at all drawings / data sheets/QP/ valid type tests reports/ all relevant information shall be submitted to BHEL for organising approval of ultimate customer.	
2.	Bidder to confirm that it will offer approved Make of the components and fitments at contract stage. In case the offered make is not approved by the customer, then alternate make shall be supplied without any commercial implications to BHEL.	

Date:
Bidder

Signature of the authorized representative of

Company Seal

SECTION-5 **Junction Box**

CHECK LIST FOR INFORMATION TO BE FURNISHED WITH OFFER **RETURN THIS CHECKLIST AS PART OF THE OFFER DULY SIGNED**

The offer may not be considered if the following information and this Checklist are not enclosed with the Offer.

BHEL ENQUIRY. NO:

BIDDER:OFFER REFERENCE:

A)

(1)	(2)	(3)			(4)	(5)
S.No.	Parameters	Data			Yes	Remarks in case reply in Col (4) is NO
1	Applicable Standard	Latest IS -5039,IS-8623, or IEC-60439, IS 13947			Yes	
2	Type of JB					
3.0	Construction Feature					
3.1	Thickness of material used	Atleast 1.5 mm stainless steel Grade 304 / 1.6 mm Aluminium			Yes	
3.2	Degree of protection	IP 55 as per IS 13947			Yes	
3.3	Control Wiring	2.5 mm ² , Stranded copper			Yes	
3.4	Space Heater / Lamp for illumination /Socket	Provided			Yes	
4.0	Type of terminal block (Indenter to tick)	Disconnecting stud type CATD M4 of Elmex /Eq. 180 Nos	Disconnecting stud type CAT DM4 of Elmex /Eq. 130 Nos	Disconnecting stud type CAT DM4 of Elmex /Eq. 75 Nos	Yes	
5.0	Clearance between TBs				Yes	
5.1	Clearance between two rows of terminal blocks (End to End)	150 mm minimum			Yes	
5.2	Clearance between first/bottom row of terminal blocks and associated cable gland plate	250 mm minimum			Yes	

6.0	Name plate details, type etc. shall be mentioned in notes of drawings	Yes	Yes	
7.0	Door handle with integral lock & master key	Provided	Yes	
8.0	TB covers	TBs fully enclosed with removable covers of transparent, non-deteriorating type plastic material	Yes	
9.0	Fixing Hardware (Nuts, Bolts and Washers) for mounting JB	Provided	Yes	
10.	Standard drawing approval.	Powergrid approved Standard drawings to be followed.	Yes	

B) TYPE TESTS

i) Whether type test reports of the following test conducted earlier on identical or similar material are available (test reports are of the test conducted not earlier than 10 (Ten) years from the date of NOA i.e.29.7.19)

(YES)

S.No.	TESTS	REPORT NO.	Date	Conducted at accredited laboratory or witnessed by independent authority
1	Degree of protection test IP55			

ii) If type test reports are not acceptable to BHEL/Customer then above tests shall be conducted by the bidder free of cost.

(YES)

C)

S.No.	Description	Confirmation of Supplier
1.	Bidder to confirm that at all drawings / data sheets/QP/ valid type tests reports/ all relevant information shall be submitted to BHEL for organising approval of ultimate customer.	

2.	Bidder to confirm that it will offer approved Make of the components and fitments at contract stage. In case the offered make is not approved by the customer, then alternate make shall be supplied without any commercial implications to BHEL.	
----	---	--

Date:

Signature of the authorized representative of Bidder

Company Seal