

SPECIAL CONDITION ANNEXURE - 1

PR No. 120455999 Dated 02.01.2018

1. Two-part bid. Open tender to be floated.
2. Supply of PR item 10 & 20 as per SA350LF2 and NPCIL technical specification PC-M-960 Rev.01 / Annexure 2. Supplier to confirm. Supplier to give clause by clause confirmation of all the applicable clauses as per Annexure 2.
3. Supply of PR item 30 & 140 as per DIN EN 10222-2 1.5415-16Mo3 and NPCIL technical specification PC-M-960 Rev.01 / Annexure 1. Supplier to confirm. Supplier to give clause by clause confirmation of all the applicable clauses as per Annexure 1
4. These intended Forgings are required for NPCIL 700MWe SG, GHAVP 1 & 2 project site.
5. **End Use and End User Certificates will not be provided by BHEL.**
6. Wherever FTC requirement is mentioned in the component drawing and specification PC-M-960 Rev.01 Annexure 1 & 2, FTC material (from same melt as of forged component) shall also be supplied along with the components.
7. Quantity given in the indent may increase or decrease, depends on the requirements of customer. Quantity being procured will be finalized before price bid opening.
8. For offer acceptance suppliers should have the capability and experience to produce the intended items as per the quality standards mentioned in NPCIL technical specification. **Supplier should have supplied the intended items for nuclear application / Nuclear Power Corporation of India Limited / any other nuclear power station.** As a documentary proof of supplier's experience in manufacturing the intended items, Test Certificates for previous supplies with details of Customer, Third Party Inspection Agency etc. shall be submitted along with offer.
9. Offers received will be evaluated by BHEL and NPCIL. Final acceptance of the offers will be based on NPCIL recommendation.
10. Inspection agency for imports are BHEL & NPCIL or third party inspection (TPI) agency approved by NPCIL. Inspection charges arising out of third party inspection to be quoted separately.
11. Inspection agency for indigenous supply are BHEL and NPCIL.
12. For indigenous supply, chemical composition and mechanical tests to be carried out in NABL accredited laboratory only.

Post.
CHANDRA PRAKASH JOSHI
Sr. Engineer
Matl. Planning / ATP
BHEL, TRICHY - 620 014.

M. Palanivelu
02/01/18
M. PALANIVELU
Sr. Manager
Matl. Png & Sub-Contg / ATP
BHEL, TRICHY - 620 014.

13. Supplier has to submit Quality documents and related manufacturing and test procedures for approval.
14. The actual production of material is permitted only after approval of Quality Assurance Plan (QAP), Manufacturing Process Plan (MPP), and test procedures by BHEL and NPCIL
15. Dispatch clearance for material shall be given after acceptance of Test Certificates by BHEL & NPCIL
16. Three sets of documents containing (i.) Test Certificates, (ii.) copies of the approved quality documents and test procedure, (iii.) DCR and (iv.) Drawing etc. to be provided along with the supply of raw material.

Chandra
02.01.2018
CHANDRA PRAKASH JOSHI
Sr. Engineer
Matl. Planning / ATP
BHEL, TRICHY - 620 014.

@@@

M. Palanivelu
02.01.18

M. PALANIVELU
Sr. Manager
Matl. Plng & Sub-Contg / ATP
BHEL, TRICHY - 620 014.

NUCLEAR POWER CORPORATION OF INDIA LTD.
(A Government of India Enterprise)

SPECIFICATION NO. : PC – M – 960

REVISION NO.	:	0	1						
DATE OF ISSUE (MONTH/YEAR)	:	June, 2013	Feb, 2014						
TOTAL NO. OF PAGES (Including Cover Sheet)	:	52	52						

TECHNICAL SPECIFICATION

FOR

**QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL
FORGINGS FOR 700 MWe PROJECTS**

REF. USI NO. : 33111

	NAME	Designation	SIGNATURE	DATE
PREPARED BY	R.K.Gupta	ACE	Sd/-	24/06/2013
	Braham Prakash	ACE	Sd/-	24/06/2013
CHECKED BY	P.B.Rshikesan	ACE	Sd/-	24/06/2013
	D.Ganesh	ACE	Sd/-	24/06/2013
	M.R.S.Saxena	ACE	Sd/-	24/06/2013
REVIEWED BY	S.N.Kamath	CE	Sd/-	24/06/2013
	M.K.Sharma	CE	Sd/-	01/07/2013
APPROVED BY	U.C.Muktibodh	ED (Engg.)	Sd/-	01/07/2013

File Name : PC – M – 960
CD No.:

REVISION CONTROL SHEET

DOCUMENT TYPE: TECHNICAL SPECIFICATION

NO. : PC - M - 960

TITLE: TECHNICAL SPECIFICATION FOR QUENEHED & TEMPERED
LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700
MWe PROJECTS

REV. NO. & DATE	DESCRIPTION OF REVISION	PREPARED BY	CHECKED BY	REVIEWED BY	APPROVED BY
0 June, 2013	Original (Pages 52)	Sd/- R.K.Gupta Sd/- Braham Prakash	Sd/- P.B.Rshikesan Sd/- D.Ganesh Sd/- M.R.S.Saxena	Sd/- S.N.Kamath Sd/- M.K.Sharma	Sd/- U.C. Muktibodh
1 Feb 2014	General Revision , Revision at page 14 regarding acceptance standard of UT examination.	<i>R.K.Gupta</i> R.K.Gupta <i>Braham Prakash</i> Braham Prakash	<i>P.B.Rshikesan</i> P.B.Rshikesan D.Ganesh <i>M.R.S.Saxena</i> M.R.S.Saxena	<i>S.N.Kamath</i> S.N.Kamath M.K.Sharma <i>M.K.Sharma</i> M.K.Sharma	<i>U.C. Muktibodh</i> U.C. Muktibodh

NPCIL PROPRIETARY

This document contains confidential and protected information and that the same are the intellectual property of Nuclear Power Corporation of India Limited.(NPCIL). No part of this document including notably any editorial elements, verbal and figurative marks and images included herein, shall be reproduced or transmitted or utilized or published or stored in any form or by any means now known or hereinafter invented, electronic, digital or mechanical, including photocopying, scanning, recording or by any information storage or retrieval system, without prior written permission from NPCIL, by any person or entity. Unauthorized use, disclosure or copying is strictly prohibited and may constitute unlawful act and can attract legal action.

This page has been kept intentionally blank

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 1 of 48
	<u>TECHNICAL SPECIFICATION FOR</u> QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

1.0 SCOPE

This specification establishes minimum requirements for low alloy steel forgings (Pressure boundary Shells, Tube Sheet, Integral Cone & Shell Dished Ends, Nozzles, Plates etc.) used in the construction of Heat Exchangers and Pressure Vessels. The forgings are required to be made from fine grained, killed and vacuum degassed low alloy steel equivalent to DIN 20MnMoNi55 grade with modified chemical composition. The manufacturing process adopted shall ensure cleanliness of the highest order, isotropy of the mechanical, chemical and metallurgical properties, superior fracture toughness and weldability. This specification is appended with following Annexures.

Annexure 1: Low Alloy Steel Forgings -16 Mo3

Annexure 2: Steel Forgings –ASME SA 350 LF2

Annexure 3: 20 Mn Mo Ni 55 Forgings for Bleed Condenser.

This specification is applicable for 700MWe projects beyond RAPP 7&8.

2.0 CONTENTS

The requirements of this Specification are presented under the following headings:

	<u>Section</u>
Scope	1.0
Contents	2.0
Applicable Codes & Standards	3.0
Process of Manufacture	4.0
Chemical Composition	5.0
Heat Treatment	6.0
Mechanical Properties	7.0
Tests & Examinations	8.0

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 2 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

Non-Destructive Examination	9.0
Repairs	10.0
Procedures, Plans, Reports & Documentation	11.0
Quality Surveillance	12.0
Marking, Packing and Shipment	13.0
Simulated Heat Treatment Cycle	Fig.1
UT Scanning Direction for Shells, Tubular Forgings, Dished Ends	
Petals	Fig.2
UT Scanning Direction for Forged Bars	Fig.3
UT Scanning Direction for Tube sheet & Dished Ends	Fig.4
UT Scanning Direction for Forged Plate for Manhole / Handhole	
Covers & PWTC	Fig.4A
Test Specimen Orientation	Fig.5
Test Specimen for Impact Test	Fig.6
Test Coupons Location – Tube Sheet	Fig.7
Material Sampling & Testing Plan- Tubesheet	Fig.8
Product Analysis & Metallurgical Examination (Tube Sheet)	Fig.9
Test Coupon Location – Ring Forgings	Fig.10
Material Sampling & Testing Plan for STC-A – Ring Forgings	Fig.11
Material Sampling & Testing Plan for STC-B,C,D,E&F	Fig.12
and RTC-A – Ring Forgings	
Test Coupons Location Dished End Forgings	Fig.13
Material Sampling & Test Plan – Dished End Forgings	Fig.14
Test Coupon Location – Nozzle Forgings	Fig.15
Material Sampling & Test Plan - Nozzles	Fig.16

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 3 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

Metallurgical Test Plan – Nozzles	Fig.17
Extent of Tests – Tube Sheet	Table – 1
Extent of Tests – Shell & Ring Forgings	Table – 2
Extent of Tests – Primary Head & Dished End Forgings	Table – 3
Extent of Tests – Nozzles of ID upto 250 mm	Table – 4
Extent of Tests – Nozzles of ID over 250 mm	Table – 5
Low Alloy Steel Forgings – 16Mo3	Annexure–1
Low Alloy Steel Forgings – ASME-SA-350 LF2	Annexure–2
Bleed Condenser Forgings	Annexure–3

3.0 APPLICABLE CODES AND STANDARDS

The following codes and standards of the issue in effect on the date of issuing the tender document shall form part of this specification. In case of conflict between the codes/standards listed below and this specification, generally the specification will govern. The supplier must obtain necessary clarification from the purchaser in such a case.

i.	ASME Section II	-	Part A	- Ferrous Materials
ii.	ASME Section III	-	Division 1	- Sub-Section NB
iii.	ASME Section V	-		Non Destructive examination
iv.	ASTM	-		Relevant Standards

4.0 PROCESS OF MANUFACTURE

4.1 Melting

The steel shall be made by basic electric process and shall be vacuum degassed to remove objectionable gases particularly Hydrogen. Vacuum system should be of sufficient capacity to effect a blank-off pressure which is sufficiently low for sufficiently long duration.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 4 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

4.2 **Discard**

Sufficient discard shall be made from each ingot to secure freedom from piping and excessive segregation.

4.3 **Grain size**

Grain size shall be measured as per ASTM-E-112 and shall be 6 or finer. The grain size and microstructure shall be determined on a notched bar impact test specimen, obtained from simulated Heat Treated Test Coupons. The examination shall be on the Longitudinal – Normal Section. In case of determination on an untested side (e.g. Tubesheet, Nozzles), these examinations shall be carried out on the forging directly. The micrographs for assessing the microstructure shall be made at a magnification allowing unambiguous assessment (as a rule: X 200).

4.4 **Forging Process**

The components shall be hot forged as close as practicable to their final finished shape and size by a press or hammer of sufficient capacity to work the metal throughout its section. The forging ratios shall not be less than 3. Tube sheet and primary head forgings, where overlay cladding is done, shall be processed in such a way that the minimum segregation portion shall be identified and kept for cladding zone.

Material flow shall be such as to favorably resist the stresses encountered in service (Main Working Direction).

4.5 **Machining**

Prior to the heat treatment, forgings shall be contour machined as close to the finish dimensions as possible.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 5 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

5.0 CHEMICAL COMPOSITION

The chemical composition for both product and ladle analysis shall be as follows. The specimens for product analysis will be taken from simulated heat treated test coupons described elsewhere in this specification.

<u>Element</u>	<u>Weight percentage</u>
C	0.17 - 0.23
Mn	1.20 - 1.50
Si	0.15 - 0.30
Mo	0.40 - 0.55 ⁽¹⁾
Ni	0.50 - 0.80
Cr	0.20 max.
Cu	0.12 max ⁽¹⁾
V	0.02 max.
Co	0.03 max.
Al (tot)	0.010 - 0.040
Sn	0.01 max ⁽¹⁾
As	0.015 max
Sb	0.007 max.
P	0.010 max ⁽¹⁾
S	0.008 max ⁽¹⁾
N (tot)	0.013 ⁽¹⁾
H ₂	1 ppm max.
O ₂	20 ppm max.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 6 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

The above chemical composition slightly differs from DIN 20 Mn.Mo Ni 55 grade. Subject to the approval by the purchaser, minor deviations may be permitted provided all other requirements of the specification are met. In the likelihood of the above limits being exceeded, the guaranteed maximum values shall be indicated in the bid itself.

Note (1) – If these figures are exceeded and check analysis levels of upto $P \leq 0.015\%$, $S \leq 0.015\%$, $Mo \leq 0.63\%$, $Cu \leq 0.18\%$, $Sn \leq 0.016\%$ and $N (tot) \leq 0.015\%$ are accepted, the inspection agency shall determine until further notice whether heat affected zone simulation tests and, where applicable, tangential section examination are required. If intermediate annealing at $550^{\circ}C$ is planned in the course of further processing the permissibility of this annealing temperature shall be demonstrated in the course of the aforementioned tests/examinations. Extent and implementation of testing shall be agreed upon with the Inspection Agency.

6.0 HEAT TREATMENT

6.1 The forgings shall be supplied in quenched and tempered condition. The forgings, after contour machining near to finish dimensions, shall be heated to a temperature which produces an austenitic structure and then quenched in a suitable liquid medium ensuring uniform cooling. The tempering temperature shall be between 650 to $680^{\circ}C$. The measured highest temperature during stress relief heat treatment shall not be higher than the measured lowest temperature during tempering.

The uniformity of temperature during any of the heat treatment shall be proved by continuous temperature recording instruments with the help of thermocouples attached to the component.

6.2 Simulated Heat Treatment (SHT)

The simulated heat treatment (SHT) is intended to simulate the heating cycles which the actual component may experience during the course of fabrication. Such heat treatment is given to some of the test coupons called Simulated Heat Treated Coupons (STC). Heating and cooling rates shall be as indicated in the figure below:

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 7 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

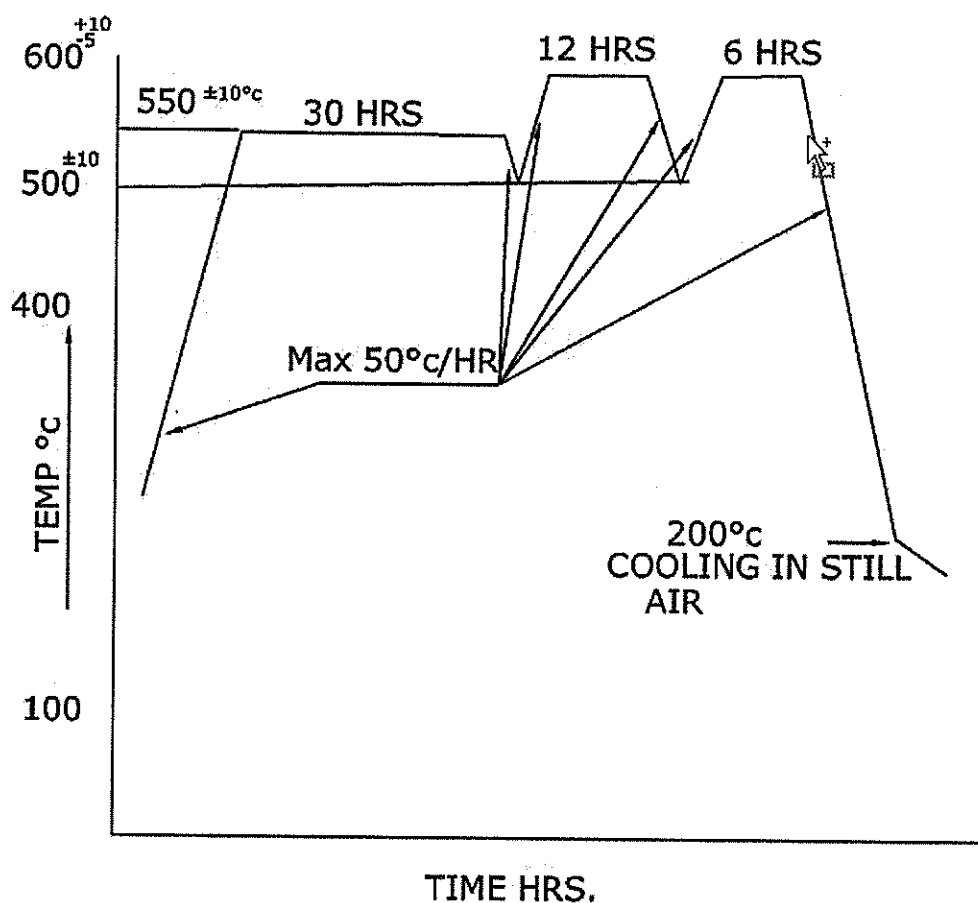


FIG.-1

7.0 MECHANICAL PROPERTIES

- 7.1 The mechanical tests shall be conducted as per ASTM A-20 and ASTM A-370 (DIN 50115, DIN 50125 and DIN EN 10002-1). Following minimum requirements shall be met with both in Quenched and Tempered and simulated heat treated condition for all products except manhole cover / handhole cover wherein minimum requirement shall be met in Quenched & Tempered condition.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Page No. : 8 of 48 Rev. No. : 1

Minima pertaining to mechanical properties at room temperature and 350°C

Product form	Test Temp.	Mechanical Properties		20 MnMoNi 55 ¹⁾	Unit
Primary head Spherical Ring Tube sheet Shell Secondary Head Nozzles	RT	Rm	l, tr, n	560-700	[N/mm ²]
		R _{p0.2}	l, tr, n	390	[N/mm ²]
		A ₅	l, tr	19	[%]
		Z	l, tr	45 (EW)	[%]
		Z	n	35 (EW) / 45 (MW)	[%]
Primary head Spherical Ring Shell Secondary Head Nozzles Tube sheet	350°C	Rm	l, tr, n	505	[N/mm ²]
		R _{p0.2}	l, tr, n	343 ³⁾	[N/mm ²]
		A ₅	l, tr	16 ²⁾	[%]

l = Longitudinal
tr = Transverse
n = Normal

EW = Smallest single value
MW = Average value of 3 specimens

A₅ = % Elongation on 5d (in 50 mm minimum gauge length)
Z = % Reduction in area
R_{p0.2} = Yield Strength (0.2 % offset)
Rm = Tensile strength

- 1) Sampling location T/4 x T/2 (Resp. 80 x 80 mm for tube sheet)
- 2) 14% for Nozzles and Tube Sheet
- 3) 314 N/mm² for Tube Sheet

7.1.1 Testing scope of Manhole and Handhole covers in quenched & tempered condition shall be same as that of 'STC-B' of Shell forgings (Table – 2). Testing scope of Production Weld test Coupon (PWTC) in both quenched & tempered and simulated heat treated condition shall be same as that of STC-B of Shell forgings (Table – 2).

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 9 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

7.2 **Notch Toughness**

7.2.1 **Nil Ductility Transition Temperature (T-NDT)**

The nil-ductility transition temperature as determined by drop weight test in accordance with ASTM-E-208 shall not be higher than - 15°C.

In case T-NDT has already been established for this type of material, complete details of the test procedure and results will be reported which shall be subject to approval by the purchaser.

7.2.2 **Reference Nil Ductility Transition Temperature (R-TNDT)**

Three ISO-V transverse specimens will be tested at +18°C for certification of RTNDT. The minimum absorbed energy and lateral expansion shall not be less than 68 J and 0.9 mm respectively, for any of the specimens. The percent shear fracture shall be reported.

7.2.3 **Longitudinal, transverse and normal ISO-V test specimens will exhibit the following minimum values at -15°C.**

- i) Average of 3 specimens 41 J
- ii) Lowest single value 34 J

7.2.3 **Cv-Impact Curve**

Charpy V-notch impact strength versus temperature curves shall be established. Tests shall be conducted at least at six different temperatures including - 15°C and +18°C, to fully define upper and lower energy shelves. The upper energy shelf shall have 100% shear fracture and lower energy shelf a maximum of 10% shear fracture. The test reports shall include absorbed energy, percent shear fracture and lateral expansion, plotted against temperature. The upper shelf energy shall be more than 100 J. The absorbed energy and lateral expansion values at +18°C and - 15°C shall meet the requirements of 7.2.2 and 7.2.3.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 10 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

7.3 Hardness Test

Hardness of each forging shall be measured after tempering, before any further processing, along the grid as defined in each product specification to demonstrate uniformity. The minimum and maximum hardness value of each forging shall be reported. The difference between these two values for a forging shall not exceed 40 BHN. Tests shall be carried out as per ASTM-E-10.

7.4 Inclusion Rating

Inclusion rating (Heavy and Thin Series) shall be determined as per ASTM-E 45 (Method A or D) and shall be better than –

A	B	C	D
2.0	2.0	1.0	1.5

8.0 TESTS & EXAMINATIONS

8.1 Categories of Test Coupons

Compliance of the material with the specification requirements is checked on various categories of test coupons described as under:

i) Raw Material Test Coupons (RTC)

Test coupons obtained from the quenched and tempered forgings or forging extensions.

ii) Simulated Heat Treated Test Coupons (STC)

Test coupons obtained from the quenched and tempered forgings and subjected to simulated heat treatment described in Section 6.2.

iii) Final Production Test Coupons (FTC)

These are in the same condition as RTC. RTC and STC shall be tested at the supplier's works whereas FTC will be dispatched with the ordered item for production tests at the Purchaser's works.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 11 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

iv) Production Weld Test Coupon (PWTC)

PWTC wherever required shall be from the same heat. The PWTC shall undergo same amount of deformation and shall be supplied in same heat treatment condition (Q&T) as that of respective forgings.

8.2 **Test Coupon Location**

Top and bottom of the forgings shall be same as respective ends of the ingot. Sufficient material in the form of integrally forged ring or disc prolongations shall be provided for the purpose of testing. Cylindrical shells and nozzle forgings from which more than one nozzle is to be made, shall have prolongations at both ends. Dished ends, tube sheets and single nozzle forgings shall have prolongations on the bottom end. RTC samples shall be tested first.

STC, RTC and FTC shall be taken from the adjacent areas at any location of the cross section in the following manner:

- Full circumferential test rings shall be parted off from the forging prolongations after the final heat treatment. Entire cross section shall be divided into three sectors (say A, B, & C), equally spaced at 120° apart.
- Each sector shall be suitably marked to accommodate STC, RTC and FTC, adjacent to each other. Identification of the coupons shall be ensured by suitable methods prior to their separation from the test ring and all through the various stages of testing.
- The location of test coupons in the top and bottom test rings shall be diametrically opposite to each other.
- Any balance material from the test rings, if in excess of the test requirement shall be kept reserved for any contingency which may arise during the course of testing.

Refer Figures 7 to 17 for location of test coupons.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 12 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

- v) Test coupon for forged plate for Manhole \ Handhole covers and PWTC shall be taken from one end of the forged plate.

8.3 Test Specimen Location

The test coupons shall be taken in such a way that the test specimens shall have their longitudinal axis atleast $\frac{1}{4} t$ (80 mm for tube sheet) from any surface and with the mid length of the specimens at least $\frac{1}{2} t$ (80 mm for tube sheet) from any second surface, where 't' is the maximum heat treated thickness of the forging.

8.4 Specimen Directions

The mechanical properties are to be established along the following three mutually perpendicular directions:

- | | | |
|-----------------|---|--|
| i) Longitudinal | - | Parallel to the main working direction |
| ii) Transverse | - | Transverse to the main working direction |
| iii) Normal | - | Parallel to the direction of thickness |
- (Applicable for thickness in excess of 70 mm)

8.5 Chemical Analysis

Chemical analysis shall be carried out in accordance with ASTM-E 30 & ASTM—E 350. If the ingot is made from one heat, only one ladle analysis is required. However, in case of an ingot made from more than one heat, weighted average shall be reported.

For product analysis, samples from each STC shall be analyzed. Samples for chemical analysis shall be taken from a depth of $\frac{1}{4}t$ from any tempered wall surface and at least at a distance of $\frac{1}{2}t$ from the heat treated edge of the coupon. Broken mechanical test specimens may be used.

Apart from STC samples, the chemical composition shall also be determined as required by individual product specifications.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 13 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

8.6 Mechanical Tests

The extent of tests required for each product has been included in tabular form under the product specifications.

For tension test, one specimen shall be tested from a sampling point at room temperature and at 350°C. For impact test, one set of 3 Charpy-V notch specimens shall be tested at a given temperature.

NDT temperature shall be determined using STC Pellini specimens from one location. The NDT temperature so determined shall also be confirmed by tests on two transverse specimens taken from STC & RTC coupons from other locations (See Tables 1, 2 & 3). However, in case of Nozzle forgings (Table 4 & 5) NDT temperature shall be confirmed by testing two transverse Pellini specimens from STC coupons as shown therein.

8.7 Sulfur Prints (Baumann Prints)

Sulfur prints shall be prepared for Tube sheet & Primary Head forgings at the location and area specified in Fig. 9 and Table -3 respectively. For other forgings Sulfur print is not required to be taken provided the bulk sulfur content as revealed by chemical analysis is less than or equal to 0.008% both in Ladle and Product analysis.

9.0 NON DESCTRUCTIVE EXAMINATION

9.1 Ultrasonic Examination

All forgings after the final heat treatment and machining shall be ultrasonically examined in accordance with SA-388, recommended practice for Ultrasonic Examination of Heavy Steel Forgings. Where ultrasonic examination is not feasible or only partially feasible due to the final component geometry after machining, examination shall be carried out for acceptance in the semi-machined condition. The forgings shall be examined for the total volume using both straight beam and angle beam search units, observing the scanning directions as indicated in Figure 2, 3, 4 and 4A.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 14 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

The reference level for the straight beam examination shall be 6 mm diameter flat bottom hole for $t > 100$ mm and 3 mm for $t \leq 100$ mm. For angle beam examination a 3 mm wide x 12mm long x 0.03 t deep notch (3mm maximum depth) where t is nominal thickness of the material.

All Recordable indications (above 20% of reference level), apparently within acceptable limits shall be investigated to confirm that they are parallel to the forging faces and not in the transverse direction, i.e. not in the thickness direction. Defect indications under following conditions are not acceptable.

- Indications exceeding 20% of the reference level in thickness direction.
- Indications exceeding the reference level parallel to the forging faces.

In case of the tube sheet with integral hub, the hub and the portion in the tube sheet underneath the hub for a depth of at least one hub thickness shall be free from defect indications equal to or above 3% hub thickness. Similarly, in case of forgings with integral protrusions, the protrusion for a depth equal to the thickness of the protrusion shall be free from defect indication greater than or equal to the protrusion thickness.

When a cluster of small indications are obtained on the screen whose amplitudes cannot be resolved, then the gain shall be adjusted to give a back echo equal about 80% of full screen height on an adjacent defect free region. At this gain setting, the cluster of indications causing loss of back echo shall be a cause of rejection of the forging. Loss of back echo is assumed when the back reflection falls below 5% of full calibration screen height. Additionally, at such locations the sound attenuation shall be measured. The sound attenuation at 2MHz shall not be more than 4DB/Meter of single sound path.

Examination of forged bars must be performed from both thickness faces and from the cylindrical surface with normal beam probes. Additional scanning in the circumferential direction with 35° angle beam probes shall be carried out for bars larger than 120 mm in diameter. The acceptance standard shall be as follows:

$D < 60$ mm C.R.R. – 2 mm
 $D > 60$ mm C.R.R. – 3 mm
 $D > 120$ mm C.R.R. – 4 mm
(C.R.R. – Circular Reference Reflector)

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 15 of 48
	<u>TECHNICAL SPECIFICATION FOR</u> QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

9.2 **Magnetic Particle Examination**

Each forging after final machining shall be examined by magnetic particle method (MT) in accordance with ASME Section III, Para NB-2545. The acceptance standards shall be as per para NB-2545.3. The extent of examination shall be 100%. Demagnetization is required after test.

9.3 **Dimensional check**

Each forging shall be checked for dimensional compliance with the approved drawings. The actual dimensions shall be recorded in a sketch/drawing and submitted for final acceptance.

10.0 **REPAIRS**

Repair is generally not permitted. Slight surface defects may be smoothly ground and blended without impairing the minimum wall thickness. No other repair shall be carried out without prior approval of the purchaser or his authorized inspection agency. Plans for all repairs requiring heat treatment shall be submitted to the purchaser or his authorized inspection agency for review and approval, prior to taking up the job. Repairs involving welding are prohibited.

All non-conformities shall be recorded and reported to the Purchaser to determine their disposal.

11.0 **PROCEDURES, PLANS, REPORTS AND DOCUMENTATION**

The manufacturer shall prepare Quality assurance plan (QAP), manufacturing, testing, examination procedures, Fabrication drawings etc. and obtain Purchaser's approval prior to the commencement of manufacture. The manufacturer shall be responsible for preparation and issue of all certificates, reports and documents which shall be certified by the Purchaser or his authorized agency. Such certified final documents shall be supplied in bound volumes with proper identification. Final documentation containing all the above shall also be submitted in soft form (pdf format) with proper indexing.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 16 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

12.0 **QUALITY SURVEILLANCE**


The forgings shall be subjected to quality surveillance by the Purchaser or his authorized agency during manufacture. The forgings shall not be shipped until the shipping release is given by the Purchaser/his authorized agency.

13.0 **MARKING, PACKING AND SHIPMENT**

Each forging shall be marked with Product Serial Number, Heat number, Material Specification and main working direction. In case of forgings accompanied with forged test plates, corresponding test plate identification shall also be marked on the main forging indicating correspondence with top/bottom of original ingot.

The forgings shall be protected against corrosion and damage in transit and shall be properly preserved and packed for sea-worthiness. The supplier shall submit the preservation and packing plan for Purchaser's approval. Before shipment, suitable rust preventive coating shall be applied on the forgings to ensure sea-worthiness and tropical storage for two years.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 17 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

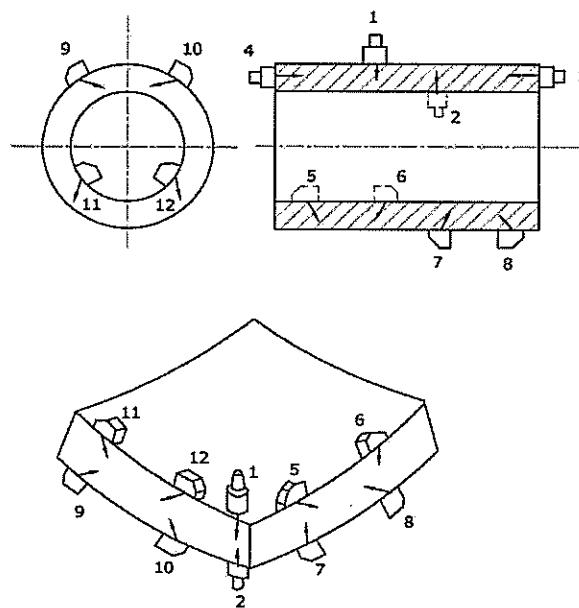

NOTES -


1. 1 TO 4 - NORMAL BEAM SCANNING
5 TO 12 - ANGLE BEAM SCANNING
2. SCAN FROM INSIDE ONLY NECESSARY
IF FURTHER INVESTIGATION OF INDICATION
OBTAINED BY O.C. SCAN IS REQUIRED.

SHELLS, TUBULAR FORGINGS, DISHED ENDS & PETALS

FIG. -2

Fig. -2 UT Scanning direction for Shells, Tubular Forgings, Dished Ends & Petals

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 18 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

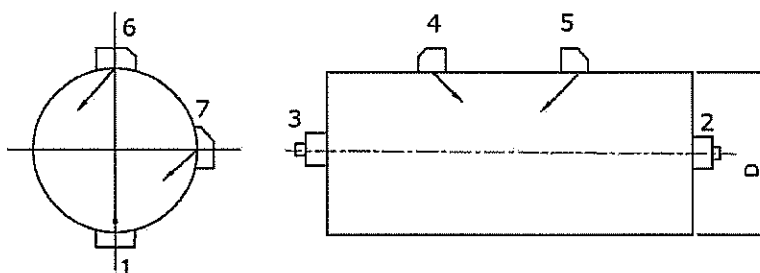

NOTES:-

1 1-3 NORMAL BEAM SCAN

2 4-7 ANGLE BEAM SCAN

3 SCANNING-

3.1 ① FOR ALL BARS.

ADDITIONAL

3.2 ② & ③ FOR $D > 60^\circ$ mm.

IF EVALUATION NOT POSSIBLE ④ & ⑤ WITH 45°


3.3 ⑥ & ⑦ FOR $D > 120$ mm. WITH 35° PROBE.

FORGED BARS

FIG.-3

Fig -3 UT Scanning Direction for Forged Bars

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 19 of 48
	<u>TECHNICAL SPECIFICATION FOR</u> QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

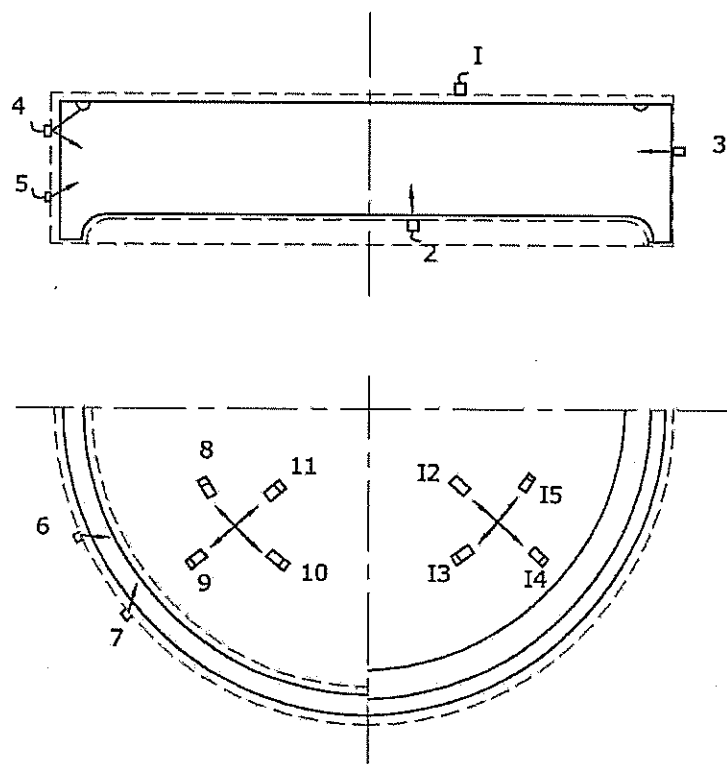

NOTES:-

1 TO 3 - NORMAL BEAM SCAN

4 TO 15 - ANGLE BEAM SCAN

FIG. -4

UT Scanning Direction for Tube Sheet and Dished Ends



NUCLEAR POWER CORPORATION OF INDIA LTD

ATOMIC POWER PROJECT


TECHNICAL SPECIFICATION FOR

QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS

Page No. : 20 of 48

Rev. No. : 1

Scanning direction for Ultrasonic Test

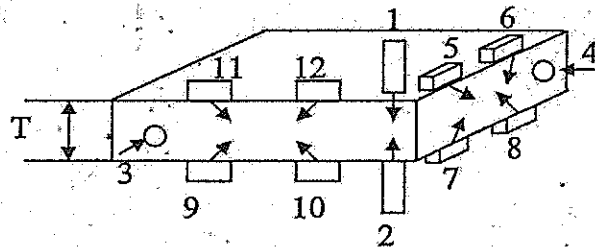

Specimen direction: 1 to 4 NORMAL BEAM SCAN
5 to 12 ANGLE BEAM SCAN (45°)

Forged plate for Manhole \ Handhole covers and PWTC

Fig 4A

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD					
	ATOMIC POWER PROJECT					
	TECHNICAL SPECIFICATION FOR					
QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS						Page No. : 21 of 48
						Rev. No. : 1

TABLE – 1
EXTENT OF TESTS – TUBE SHEET

N – Normal, T – Transverse, L - Longitudinal

Sr. No	Description	Direction	STC A	STC B	STC C	RTC D	Remarks
1	Tensile (RT)	N T L	1* 1 1	- 1 -	- 1 -	- 1 -	*If testing of first test specimen yields Z <45% two more specimen shall be tested from the same location.
2	Tensile (350°C)	N T L	1 1 1	- 1 -	- 1 -	- 1 -	
3	Impact at - 15°C	N T L	3 3 3	- 3 -	- 3 -	- 3 -	
4	Impact at +18°C	N T L	- 3 -	- 3 -	- 3 -	- 3 -	
5	Impact curve (- 15°C, 18°C and 4 other temperatures)	N T L	- 12 -	- - -	- - -	- - -	
6	Drop weight test	T	8	2	2	2	Specimen P-2
7	Grain size and microstructure		1	1	1	-	Also required at 2 other locations as per Fig.9
8	Product analysis		1	1	1	-	Also required at 3 other locations as per Fig.9
9	Hardness and Sulphur Print test						Refer Fig.9
10	U.T. & M.P.I						100%; Refer Para 9.1 & 9.2

Note : For the locations & extent of Sulfur Print test Refer Fig. 9.

33111/PC-M-960

Feb, 2014

Not for publication/presentation outside NPCIL

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Page No. : 22 of 48 Rev. No. : 1

TABLE – 2
EXTENT OF TESTS – SHELL & RING FORGINGS

N – Normal, T – Transverse, L – Longitudinal

Sr. No	Description	Direction	Bottom of Ingot				STC			Remarks
			STC			R T C	Top of Ingot			
			A	B	C		D	E	F	
1	Tensile at RT	N	1	-	-	-	1	-	-	See Note-1
		T	1	1	1	1	1	1		
		L	1	-	-	-	-	-		
2	Tensile at 350°C	N	1	-	-	-	-	-	-	
		T	1	1	1	1	1	1		
		L	1	-	-	-	-	-		
3	Impact at - 15°C	N	3	-	-	-	-	-	-	
		T	3	3	3	3	3	3		
		L	3	-	-	-	-	-		
4	Impact at +18°C	T	3	3	3	3	-	-	-	
5	Impact curve (- 15°C, 18°C and 4 other temperatures)	T	12	-	-	-	-	-	-	
6	Drop weight test	T	8	2	2	2	-	-	-	Specimen P-2
7	Grain size and microstructure		1	1	1	-	1	1	1	Examination on notched bar specimen in long-normal section
8	Product analysis		1	1	1	-	1	1	1	See note-2.
9	Hardness and Sulphur Print									See note-3.
10	U.T. & M.P.I									100%; Refer Para 9.1 & 9.2

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 23 of 48
	<u>TECHNICAL SPECIFICATION FOR</u> QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

Notes:

1. If testing of the first specimen at RT yields $Z < 45\%$, then two more test specimens from the same sampling location shall be tested.
2. Chemical composition shall be determined from one sampling location each from top and bottom. At other location C, Mn, P&S shall be verified.
3. Hardness along a maximum square grid of 1000 mm x 1000 mm on the cylindrical outside surface and end faces. In case Sulfur print is required to be carried out as specified in clause 8.7 of this Specification, than it shall be carried out on top and bottom faces at 120° apart and 200 mm long.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD					
	ATOMIC POWER PROJECT					Page No. : 24 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS					Rev. No. : 1

TABLE – 3
EXTENT OF TESTS – PRIMARY HEAD & DISHED END FORGINGS

N – Normal
T – Transverse
L – Longitudinal

Sr. No	Description	Direction	STC A	STC B	STC C	RTC	Remarks
1	Tensile at RT	N T L	1 ^D 1 1	- 1 -	- 1 -	- 1 -	See Note-1
2	Tensile at 350°C	N T L	1 1 1	- 1 -	- 1 -	- 1 -	
3	Impact at - 15°C	N T L	3 3 3	- 3 -	- 3 -	- 3 -	
4	Impact at +18°C	T	3	3	3	3	
5	Impact curve (- 15°C, 18°C and 4 other temperatures)	T	12	-	-	-	
6	Drop weight test	T	8	2	2	2	Specimen P-2
7	Grain size and microstructure		1	1	1	-	See Note-3
8	Product analysis		1	1	1	-	
9	Hardness and Sulphur Print						See Note-2
10	U.T. & M.P.I						100%; Refer Para 9.1 & 9.2

Notes:

1. If testing of the first specimen at RT yields Z <45%, then two more test specimens from the same location shall be tested.
2. Hardness values along a square grid of maximum 1000 mm x 1000 mm on the inside and outside. Sulfur print on the face at 120° apart and 120 mm long (only for Primary Head See Clause 8.7).
3. Examination on notched bar specimen in Longitudinal – Normal direction and in the centre (insitu).

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 25 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

TABLE – 4
EXTENT OF TESTS – NOZZLES OF I.D. UPTO 250 MM

N – Normal
T – Transverse
L - Longitudinal

Sr. No	Description	Direction	Bottom of Ingot		Top of Ingot STC-B	Remarks
			STC-A	RTC		
1	Tensile at RT	T	1	1	1	See Note-2
2	Tensile at 350°C	T	1	1	1	See Note-2
3	Impact - 15°C	T	3	3	3	
4	Impact at +18°C	T	3	3	3	
5	Drop weight test	T	2	-	-	Pellini - P-2 Specimen
7	Grain size and microstructure		1	-	1	Examination on notched bar specimen in longitudinal - normal direction. Also see Note-3
7	Product analysis		1	-	1	
8	Hardness					Fig.17
9	U.T. & M.P.I					100%; Refer Para 9.1 & 9.2

Notes:

1. If only one nozzle is made from a forging then test coupon shall be taken only from bottom of forging. For more than one nozzle from a forging, additional test coupon shall be taken from the top end.
2. Specimens for nozzles upto ID 160 mm need to be taken only in longitudinal direction.
3. In case only one nozzle is made from a forging, the grain size and microstructure shall be examined at one location on the main product opposite to the sample location.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	
	<u>TECHNICAL SPECIFICATION FOR</u>	
	QUENCHED & TEMPERED LOW	
	ALLOY AND OTHER CARBON STEEL	
	FORGINGS FOR 700 MWE PROJECTS	
	Page No. : 26 of 48	
	Rev. No. : 1	

TABLE – 5
EXTENT OF TESTS – NOZZLES OD I.D. OVER 250 MM

N – Normal
T – Transverse
L – Longitudinal

Sr. No	Description	Direction	Bottom of Ingot			Top of Ingot		Remarks
			STC-A	STC-B	RTC	STC-C	STC-D	
1	Tensile at RT	N	1	-	-	-	-	See Note-1
		T	1	1	1	1	1	
		L	1	-	-	-	-	
2	Tensile at 350°C	N	1	-	-	-	-	
		T	1	1	1	1	1	
		L	1	-	-	-	-	
3	Impact - 15°C	N	3	-	-	-	-	
		T	3	3	3	3	3	
		L	3	-	-	-	-	
4	Impact at +18°C	T	3	3	3	-	-	
5	Impact curve -15°C, 18°C and 4 other temperatures	T	12	-	-	-	-	
6	Drop weight test	T	2	-	-	-	-	Pellini - P-2 Specimen
7	Grain size and microstructure		1	1	-	1	1	See Note-2
8	Product analysis		1	1	-	1		See Note-2
9	Hardness							Fig.17
910	U.T. & M.P.I							100%; Refer Para 9.1 & 9.2

Notes:

1. If testing of first specimen at RT yields Z <45%, then two more test specimens from the same location shall be tested.
2. Examination on notched bar specimen in Longitudinal – Normal direction.



NUCLEAR POWER CORPORATION OF INDIA LTD


ATOMIC POWER PROJECT

Page No. : 27 of 48


TECHNICAL SPECIFICATION FOR

QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS


Rev. No. : 1

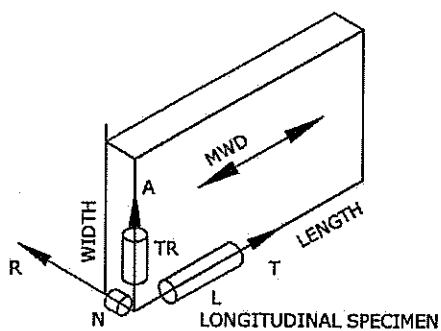


PLATE




DISC FORGINGS
(TUBE SHEET)



FORGED CYLINDER

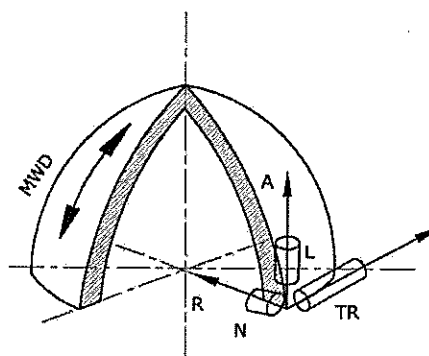

FORGED DISHED ENDS

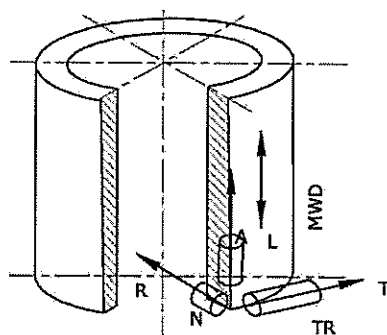

FORGED CYLINDER

METAL WORKING DIRECTION AXIAL (NOZZLES)

T = TANGENTIAL | L = LONGITUDINAL
A = AXIAL | Tr = TRANSVERSE
R = RADIAL | N = NORMAL
MWD = MAIN WORKING DIRECTION
(TO BE INDICATED BY THE
SUPPLIER FOR HIS PRODUCTS)

TEST SPECIMEN ORIENTATION

Fig. -5

33111/PC-M-960

Not for publication / presentation outside NPCIL



NUCLEAR POWER CORPORATION OF INDIA LTD


ATOMIC POWER PROJECT

Page No. : 28 of 48

TECHNICAL SPECIFICATION FOR


QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS

Rev. No. : 1

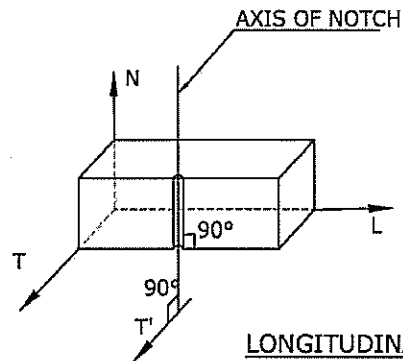


SPECIMEN ORIENTED ALONG
LONGITUDINAL AXIS
AXIS OF NOTCH PERPENDICULAR TO
LONGITUDINAL & TRANSVERSE DIRECTIC

LONGITUDINAL IMPACT TEST SPECIMEN

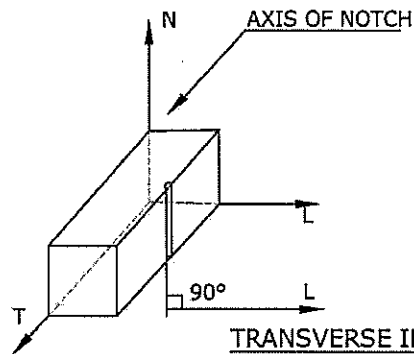

TEST SPECIMEN ALONG TRANSVERSE
DIRECTION.
AXIS OF NOTCH PERPENDICULAR TO
LONGITUDINAL & TRANSVERSE DIRECTIC

TRANSVERSE IMPACT TEST SPECIMEN


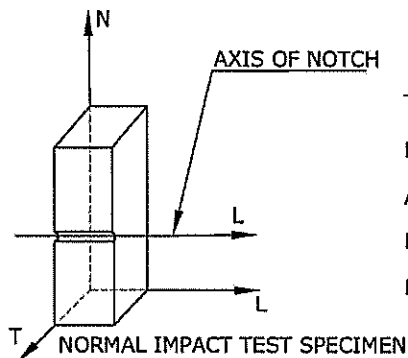


TEST SPECIMEN ALONG NORMAL
DIRECTION.
AXIS OF NOTCH PARALLEL TO
LONGITUDINAL DIRECTION.
NOTCH NEARER TO H.T. SURFACE

NORMAL IMPACT TEST SPECIMEN

TEST SPECIMEN FOR
Impact Tests
Fig.-6

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	
	<u>TECHNICAL SPECIFICATION FOR</u>	
	QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Page No. : 29 of 48
		Rev. No. : 1

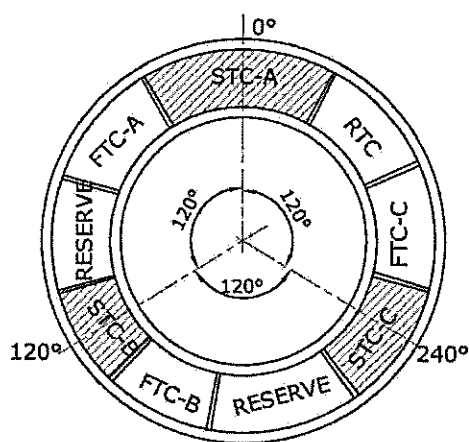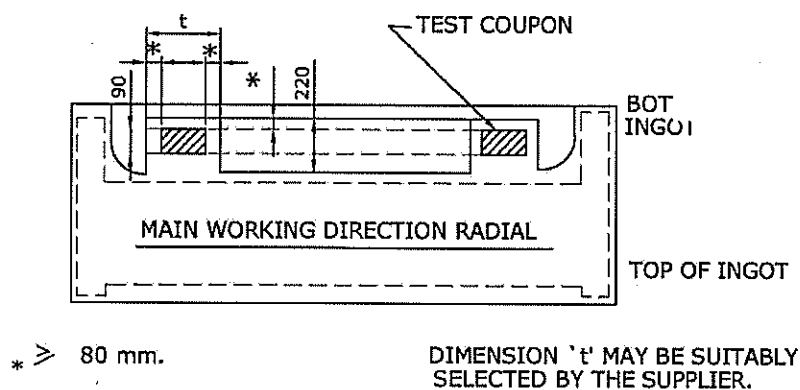

TEST COUPONS LOCATION - TUBE SHEET

FIG-7



NUCLEAR POWER CORPORATION OF INDIA LTD


ATOMIC POWER PROJECT

Page No. : 30 of 48

TECHNICAL SPECIFICATION FOR

QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS

Rev. No. : 1

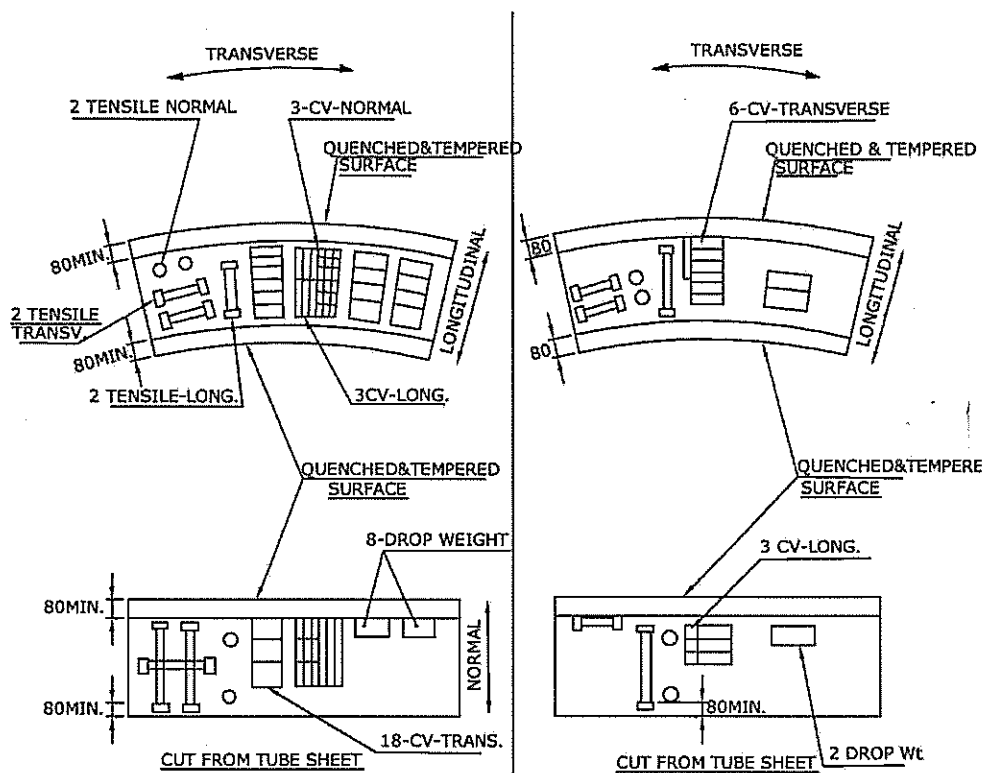

**MATERIAL SAMPLING AND TESTING
PLAN FOR STC-A**

**MATERIAL SAMPLING AND TESTING
PLAN FOR STC-B, STC-C & RTC-1**

SL NO.	TEST COUPONS TYPE OF TEST	STC-A			FOR EACH STC-B, STC-C & RTC-D LOCATIONS		
		N	L	T	N	L	T
1	TENSILE R.T.	1	1	1	-	-	1
2	TENSILE 350°C	1	1	1	-	-	1
3	IMPACT	3	3	18	-	-	6
4	DROP WEIGHT	-	-	8	2	2	2

EXTENT OF TESTS- TUBE SHEET


LEGEND:-

N - NORMAL
L - LONGITUDINAL
T - TRANSVERSE

MATERIAL SAMPLING & TESTING PLAN-TUBE SHEET

Fig.- 8

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	
	<u>TECHNICAL SPECIFICATION FOR</u>	Page No. : 31 of 48
	QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

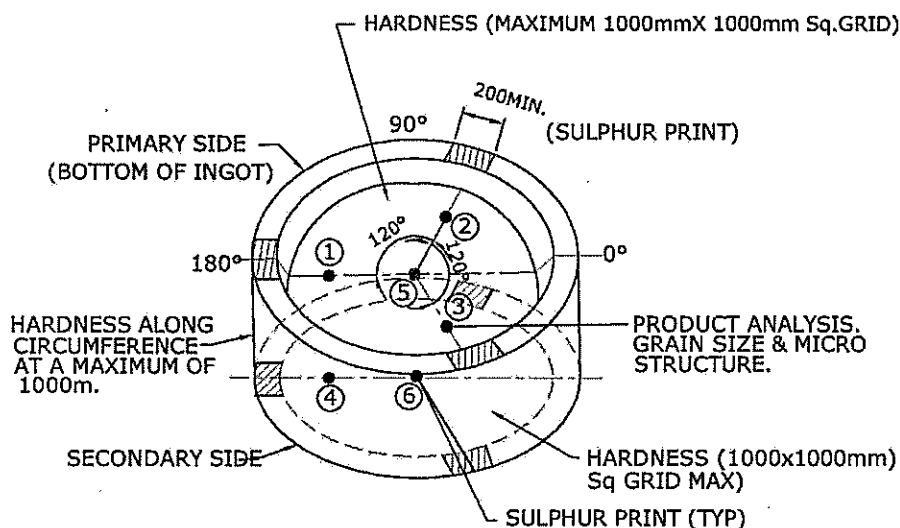

HARDNESS CHECK - a) ON BOTH END FACES ON A GRID PATTERN OF MAXIMUM 1000 X 1000mm.
[AFTER REMOVAL OF TEST COUPONS] b) ALONG CIRCUMFERENCE AT MAX. OF 1000mm APART.

SULPHUR PRINT TEST - AFTER FINAL MACHINING.

PRODUCT ANALYSIS - ①, ②, ③ ACCEPTANCE TEST COUPONS FROM TEST RING

- 4, 5, ⑥ ADDITIONAL SAMPLES.

GRAIN SIZE & MICROSTRUCTURE - a) ON ONE NOTCHED BAR TEST SPECIMEN FROM EACH SAMPLING LOCATION (STC-A, STC-B, STC-C)

b) IN THE CENTER OF THE PRIMARY & SECONDARY SIDE THE MICROSTRUCTURE AND SEGREGATION SHALL BE EXAMINED.

PRODUCT ANALYSIS & METALLURGICAL EXAMINATION (TUBE SHEET)

FIG-9



NUCLEAR POWER CORPORATION OF INDIA LTD


ATOMIC POWER PROJECT

Page No. : 32 of 48

TECHNICAL SPECIFICATION FOR

QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS


Rev. No. : 1

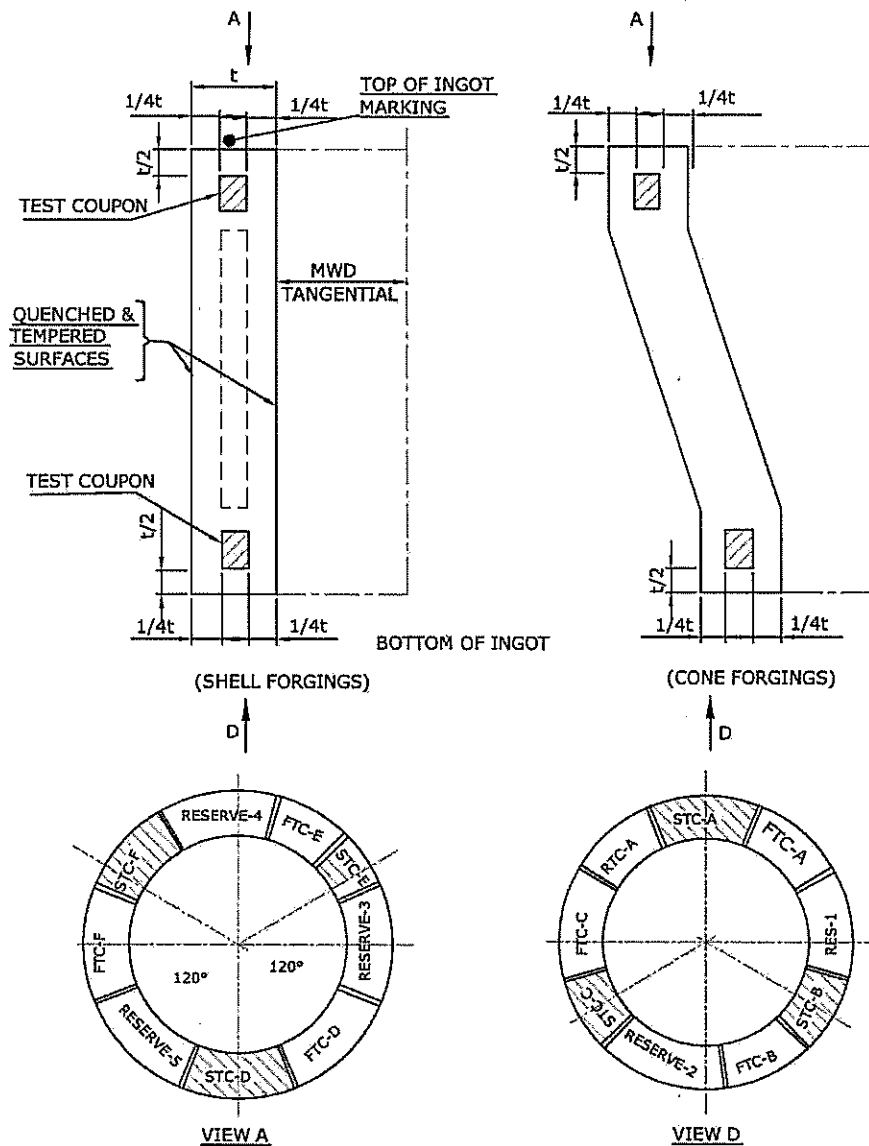

TEST COUPONS LOCATON-RING FORGINGS

FIG-10

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD ATOMIC POWER PROJECT	Page No. : 33 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

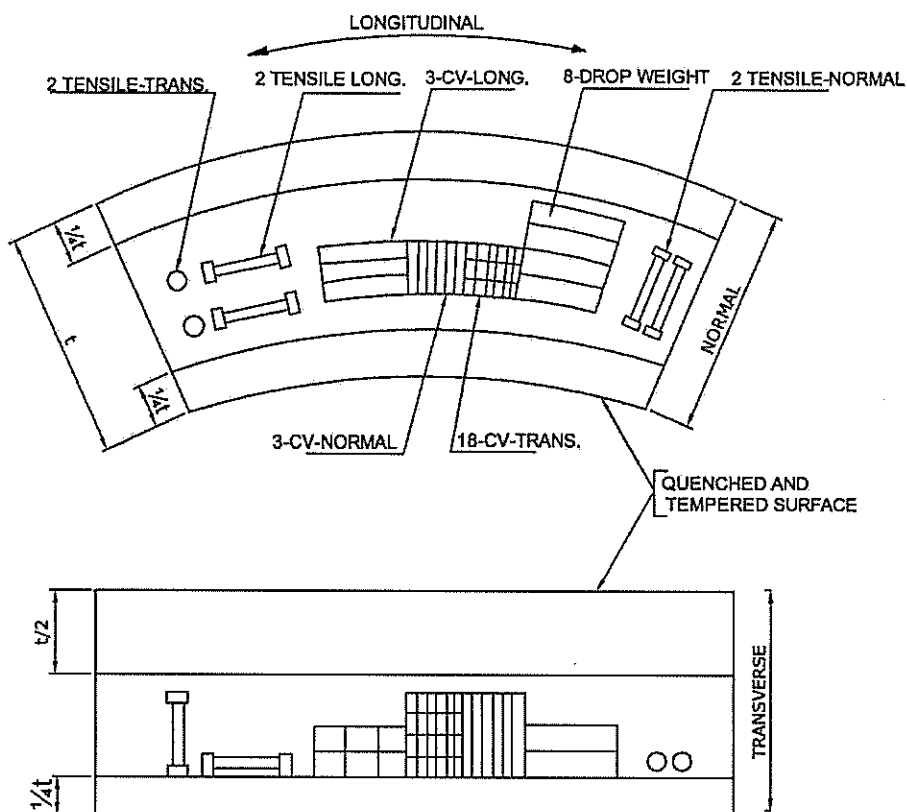

S. NO.	TYPE OF TEST	NO. OF TEST SPECIMEN		
		L	N	T
1	TENSILE AT RT	1	1	1
2	TENSILE AT 350°C	1	1	1
3	IMPACT TEST	3	3	18
4	DROP WEIGHT TEST	-	-	8

MATERIAL SAMPLING & TESTING
PLAN FOR STC-A RING FORGINGS

FIG-11



NUCLEAR POWER CORPORATION OF INDIA LTD


ATOMIC POWER PROJECT

Page No. : 34 of 48

TECHNICAL SPECIFICATION FOR

QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS

Rev. No. : 1

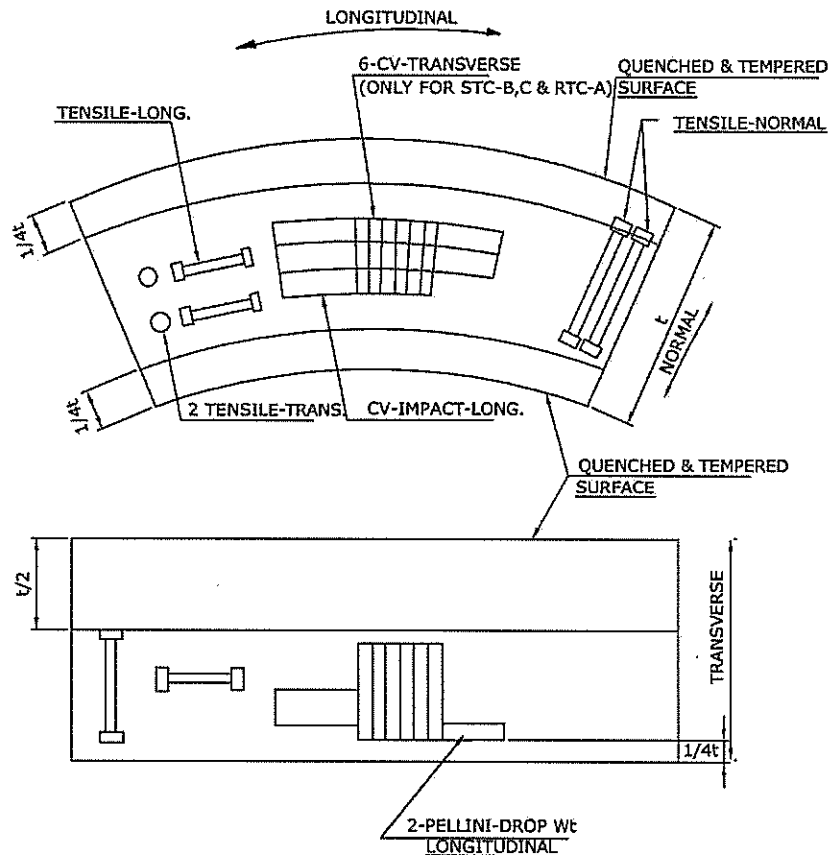

SL No	TYPE OF TEST	NO.OF SPEC FOR EACH OF STC-B & C			NO.OF SPEC FOR EACH OF STC-D,E&F			RTC-A		
		L	N	T	L	N	T	L	N	T
1	TENSILE AT RT	-	-	1	-	1	1*	-	-	1
2	TENSILE AT 350°C	-	-	1	-	1	-	-	-	1
3	IMPACT TEST	-	-	6	-	-	3	-	-	6
4	DROP WEIGHT TEST	-	-	2	-	-	-	-	-	2

* ONLY FOR STC-D

NOTE - ALSO SEE TABLE -2 FOR EXTENT OF TESTS.

MATERIAL SAMPLING TESTING PLAN-STC-B,C,D,E&F
AND RTC-A-RING FORGINGS

FIG-12



NUCLEAR POWER CORPORATION OF INDIA LTD


ATOMIC POWER PROJECT

Page No. : 35 of 48

TECHNICAL SPECIFICATION FOR

QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS


Rev. No. : 1

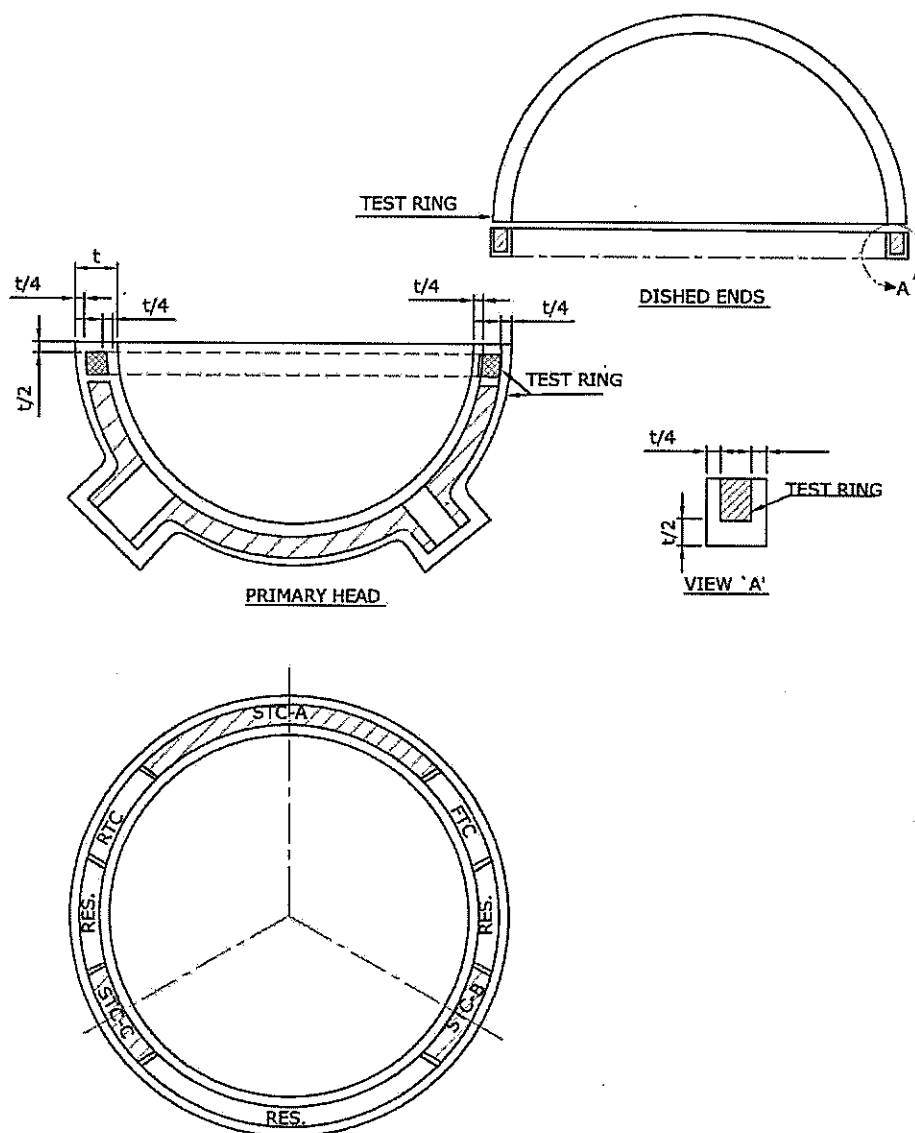

TEST COUPONS-LOCATION-DISHED END FORGINGS

FIG-13

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Page No. : 36 of 48 Rev. No. : 1

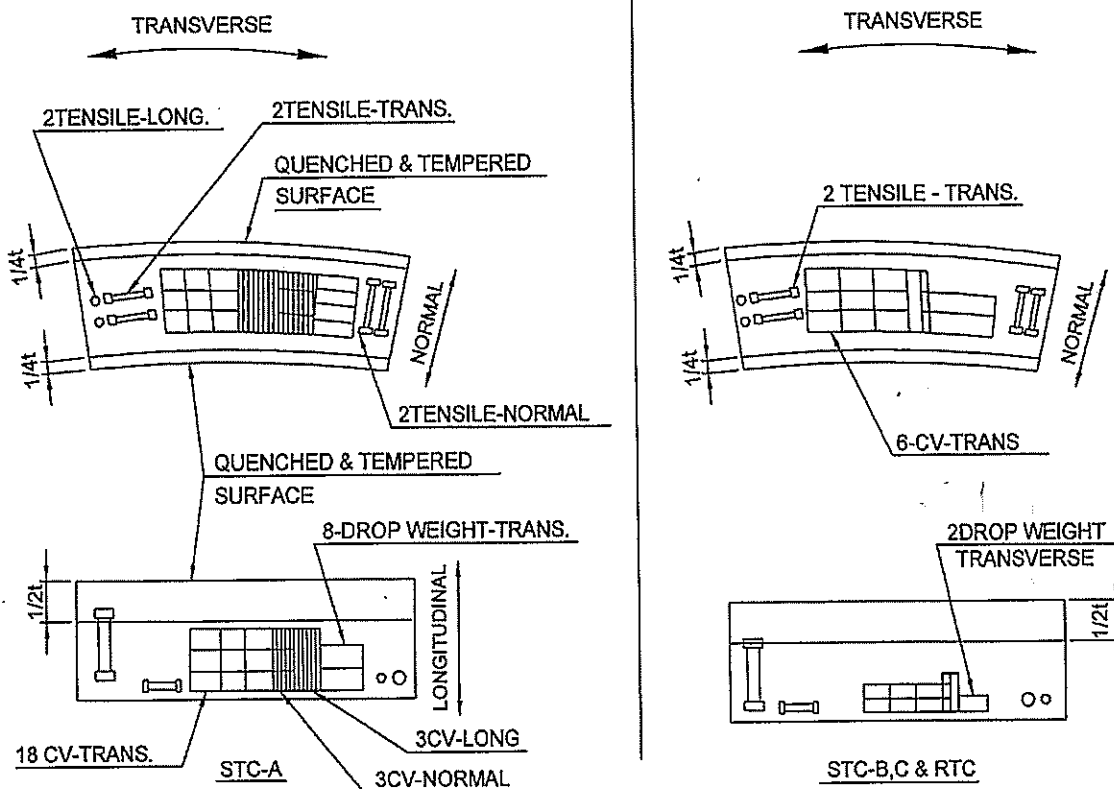

SL. NO.	TYPE OF TEST	NO.OF TEST SPECIMEN						
		STC-A			FOR EACH OF STC-B,STC-C & RTC			
		L	N	T	L	N	T	
1	TENSILE RT	1	1	1	-	-	1	
2	TENSILE 350°C	1	1	1	-	-	1	
3	IMPACT	3	3	18	-	-	6	
4	DROP WEIGHT	-	-	8	2	2	2	

MATERIAL SAMPLING & TEST PLAN - DISHED END FORGINGS

FIG - 14



NUCLEAR POWER CORPORATION OF INDIA LTD




ATOMIC POWER PROJECT

Page No. : 37 of 48

TECHNICAL SPECIFICATION FOR



QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS

Rev. No. : 1

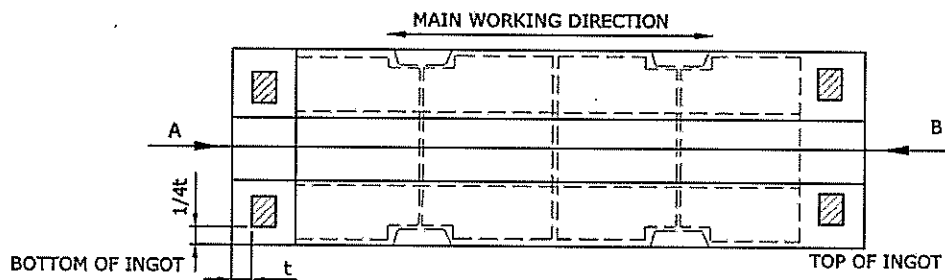

(No. OF F.T.C.'S WILL BE
EQUAL TO THE No. OF
NOZZLES & OF SIZE
EQUAL TO ATLEAST
THAT OF S.T.C.-B)

SAMPLING PLAN FOR NOZZLES I.D. ABOVE 250




NOTE:-
IF ONLY ONE NOZZLE IS
MADE FROM A FORGING
TEST COUPONS SHALL BE
DRAWN ONLY FROM THE
BOTTOM.

SAMPLING PLAN FOR NOZZLES I.D. UPTO 250

TEST COUPONS-LOCATION-NOZZLE FORGINGS

FIG-15

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 38 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

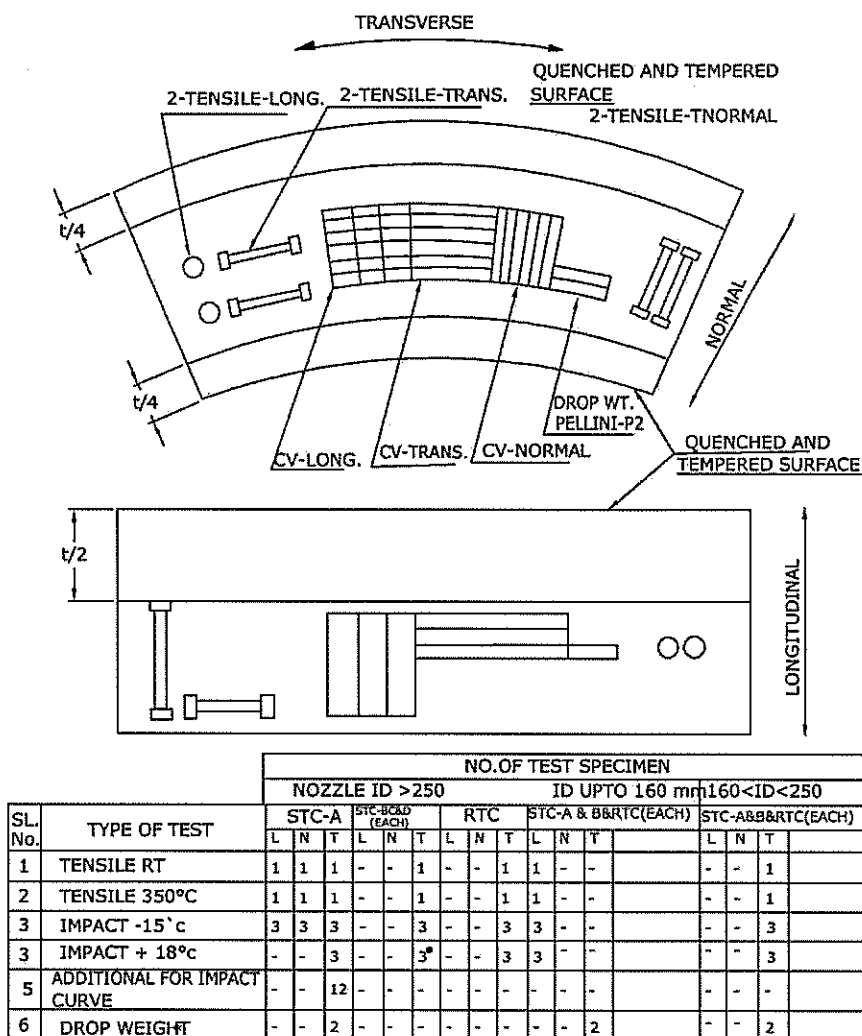


NOTE : 1.* ONLY ON STC-A
2.● ONLY FOR STC-B
3. ALSO REFER TABLE-5


MATERIAL SAMPLING & TEST PLAN- NOZZLES.

FIG-16

 एनपीसीएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Page No. : 39 of 48 Rev. No. : 1

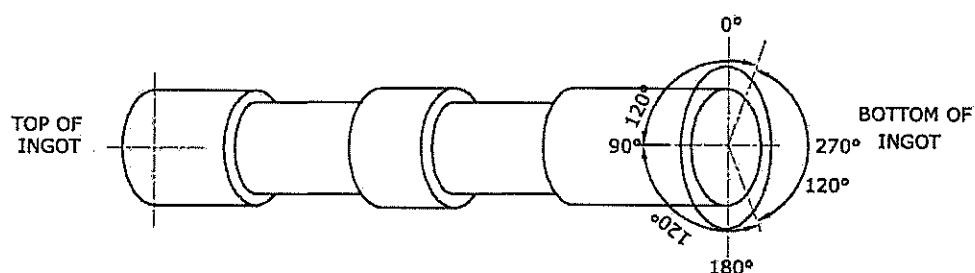

SULPHUR PRINT AFTER Q&T

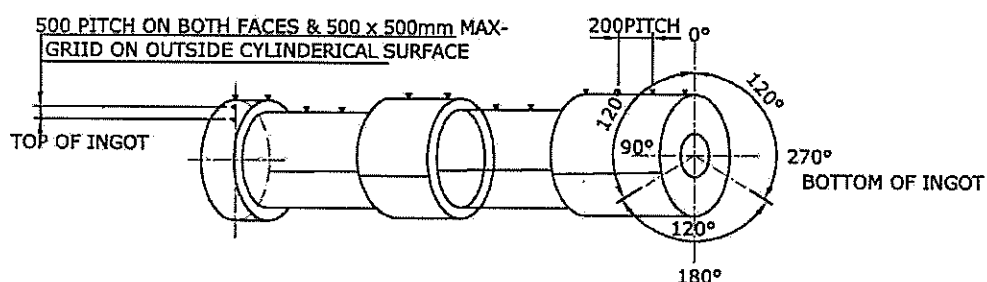

HARDNESS TEST AFTER REMOVAL OF TEST COUPONS

NOTE:

▼ — HARDNESS TEST

METALLURGICAL TEST PLAN-NOZZLES

FIG-17

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 40 of 48
	<u>TECHNICAL SPECIFICATION FOR</u> QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

ANNEXURE-1

LOW ALLOY STEEL FORGINGS – 16 Mo 3

1.0 SCOPE

This annexure covers the technical requirements for the supply of low alloy steel forgings conforming to DIN EN 10222-2 material number 1.5415.

2.0 PROCESS OF MANUFACTURE

2.1 **Steel Melting**

The steel shall be melted in an open hearth / electric furnace. The steel shall be fully killed and preferably vacuum degassed.

2.2 **Discard**

Sufficient discard shall be made from the ingot to secure freedom from piping and segregation.

2.3 **Forging Process**

The components shall be hot forged as close as practicable to their final shape by a press or hammer of sufficient capacity to work the metal throughout its section.

2.4 **Repairs**

Refer para 10.0 of PC-M-960.

3.0 CHEMICAL COMPOSITION

Both ladle and product analysis shall meet the following requirements:

Element	Weight percentage
C	0.12 - 0.20
Si	0.15 - 0.35
Mn	0.50 - 0.70

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 41 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

P max	0.035
S max	0.035
Cr	0.30 max
Mo	0.25 - 0.35
Cu max	0.30
N2 max	0.009

4.0 HEAT TREATMENT

The forgings shall be supplied in the normalized condition.

5.0 MECHANICAL PROPERTIES

- 5.1 Mechanical tests shall be conducted in accordance with ASME SA-370 and ASTM E-21. Following minimum requirements shall be met within final normalized condition. Wherever possible transverse specimen will be used failing which longitudinal specimens can be used for tests.

	RT	350°C
Tensile strength (N/sq.mm)	440 – 580	To be reported
Yield strength (N/sq.mm)	270	190
% elongation on 5d (in 50 mm gauge length)	21	To be reported
Reduction in area	35	-

5.2 Notch Toughness

Three ISO-V test specimens will be tested at 20°C. The longitudinal and transverse specimen shall exhibit the following minimum values.

- | | |
|-------------------------------|------|
| i) Average of three specimens | 55 J |
| ii) Lowest single value | 39 J |

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 42 of 48
	<u>TECHNICAL SPECIFICATION FOR</u>	
	QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

5.3 Hardness Test

Hardness shall be measured on each forging after final heat treatment along the length as well as over the thickness of the forging at sufficient number of points to demonstrate uniformity.

6.0 TEST COUPONS AND SPECIMEN LOCATION

Two separate test coupons (RTC & FTC) shall be identified and taken out from the forged bars. RTC (Raw Material Test Coupons) shall be used for preliminary tests before taking up final forging. FTC (Final Test Coupon) shall undergo same amount of working heat treatment as the final forging.

The specimens for testing shall be at least $1/4't$ from a heat treated surface and $1/2't$ from the end where 't' is the heat treated thickness.

6.1 Tensile Test Specimen

Two tensile test specimens shall be taken from each Coupon (RTC – 2 nos. & FTC – 2 nos.) for tests at room temperature and at 350°C.

6.2 Impact Test Specimen

One set of Cv impact test specimen shall be taken from each (RTC & FTC) for tests at 20°C. Lateral expansion and percent shear fracture shall be reported.

7.0 NON-DESTRUCTIVE EXAMINATION

The ultrasonic examination, magnetic particle tests and dimensional checks shall be carried out on each forging as per para 9.1, 9.2 and 9.3 of PC-M-960.

8.0 QUALITY SURVEILLANCE, DOCUMENTATION, MARKING, PRACKING AND SHIPMENT

Refer para 11, 12 and 13 of PC-M-960.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 43 of 48
	<u>TECHNICAL SPECIFICATION FOR</u> QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

ANNEXURE-2

LOW ALLOY STEEL FORGINGS – ASTM-A-350 LF2

1.0 SCOPE

This annexure covers the technical requirements for supply of low alloy steel forgings conforming to ASME-SA-350Grade LF2.

2.0 MANUFACTURE.

2.1 The steel shall be clean, homogeneous, intrinsically tough produced by any recognized fine grain melting practice and shall be fully killed. The steel shall be produced by vacuum treatment. Details of the vacuum treatment and secondary metallurgical processes used shall be indicated in the bid.

2.2. The forgings shall be supplied in accordance with SA-350 grade LF2 with following additional requirements.

2.2.1 Chemical Composition

Sulfur, Phosphorus and other impurity elements shall be restricted as given below:

S	0.025% max
P	0.025% max
Al	0.04%
V	0.01%
Cr	0.25%
Cu	0.30%
Ni	0.40%
Sn	0.011%
As	0.025%
Sb	0.007%
N2	0.013%

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD.	
	ATOMIC POWER PROJECT	Page No. : 44 of 48
	<u>TECHNICAL SPECIFICATION FOR</u> QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

2.2.2 Heat Treatment

The forgings shall be supplied in normalized condition.

2.2.3 Grain Size & Microstructure

The grain size and microstructure shall be determined on Longitudinal-Normal section of the forging. The micrographs for determining the microstructure shall be made with a minimum magnification of 200X. The grain size shall be measured as per ASTM-E-112 and shall be 6 or finer.

3.0 MECHANICAL PROPERTIES

3.1 Mechanical tests shall be conducted in accordance with ASME-SA-370 and ASTM-E-21. Following minimum requirements shall be met within final normalized condition and are applicable to all test specimen orientation viz. Longitudinal, Transverse and Normal.

	RT	350°C
Tensile strength (N/sq.mm)	483 - 655	To be reported
Yield strength (N/sq.mm) (0.2% offset)	250	190
% elongation in 50 mm	22	To be reported
Reduction in area	30	To be reported

3.2 Notch Toughness

In addition to the impact properties specified at -45.6°C as called for in SA-350 LF2, ISO-V impact transverse test specimens will be tested at + 18°C for certification of RTNDT. The absorbed energy and lateral expansion shall not be less than 69 J and 0.9 mm respectively for any of the specimens. The percent shear fracture shall be reported. Two drop weight tests carried out at - 15°C shall not indicate any break.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 45 of 48
	<u>TECHNICAL SPECIFICATION FOR</u> QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

3.3 Hardness Test

- Hardness of each forging shall be measured after the heat treatment before any further processing along the grid as defined in product specifications to demonstrate uniformity. Tests shall be carried out as per ASTM-E-10. The difference between the maximum and minimum hardness values shall not exceed 20 BHN.

3.4 Inclusion Rating

Refer para 7.4 of PC-M-960.

4.0 TESTS & EXAMINATION

For test coupon location and extent of tests refer para 8.2, 8.3, 8.4, 8.5, 8.6, 8.7 and product specification tables of PC-M-960.

5.0 NON-DESTRUCTIVE EXAMINATION

Refer para 9.1, 9.2 and 9.3 of PC-M-960.

6.0 QUALITY SURVEILLANCE, DOCUMENTATION, MARKING, PRACKING AND SHIPMENT

Refer para 11, 12 and 13 of PC-M-960.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	
	<u>TECHNICAL SPECIFICATION FOR</u>	Page No. : 46 of 48
	QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

ANNEXURE-3
BLEED CONDENSER FORGING

N – Normal, T – Transverse, L - Longitudinal

1. EXTENT OF TESTS FOR

- a) Primary Head with Integral Nozzles
- b) Tube Sheet
- c) Shell Flange
- d) Hemispherical Head
- e) Ellipsoidal Head

- 1.1 No. of Test Coupons : 3 Nos. (STC-A, STC-B & RTC)
- 1.2 Location of Test Coupons : STC A&B Diametrically opposite to each other.
- 1.3 Condition of Test Coupons : Simulated Heat Treatment for STC (See Clause 6.2 of PC-M-960)
- 1.4 Extent of Tests

Description	Direction	STC -A	STC -B	RTC
Tensile (RT)	N	1	--	--
	T	1	1	1
	L	1	--	--
Tensile (350°C)	T	1	1	1
Impact at - 15°C	T	3	3	3
Impact at +18°C	T	3	3	3
Drop weight test	T	2	--	2
Grain size and * microstructure		1	1	--
Product analysis		1	--	--
Hardness		At 500 x 500 mm grid		
U.T. & M.P.I		100% Refer 9.1 & 9.2 of PC-M-960		

* Examination on notched bar specimen in Longitudinal – Normal direction.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD	
	ATOMIC POWER PROJECT	Page No. : 47 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS	Rev. No. : 1

BLEED CONDENSER FORGINGS

N – Normal, T – Transverse, L - Longitudinal

2. EXTENT OF TESTS FOR

- Integral Forging of Cone & Shell
- Shell Forging

- 2.1 No. of Test Coupons 5 Nos.(STC-A, STC-B & RTC - Bottom of Ingot, STC-C & STC-D –Top of Ingot)
- 2.2 Location of Test Coupons: Diametrically opposite to each other on one face and displaced by 90° to the opposite face. RTC at 90° to STC
- 2.3 Condition of Test Coupons: Simulated Heat Treatment for STC (See Clause 6.2 of PC-M-960)
Q&T for RTC

2.3 Extent of Tests

Description	Direction	Bottom of Ingot			Top of Ingot	
		STC -A	STC -B	RTC	STC -C	STC -D
Tensile (RT)	N	1	--	--	1	--
	T	1	1	1	1	1
	L	1	--	--	--	--
Tensile (350°C)	T	1	1	1	1	1
Impact at - 15°C	T	3	3	3	3	3
Impact at +18°C	T	3	3	3	3	3
Impact curve (- 15°C, 18°C and 4 other temperatures)	T	12	--	--	--	--
Drop weight test	T	2	-	-	-	2
Grain size and * microstructure		1	1	--	1	1
Product analysis		1	1		1	
Hardness	At 500 x 500 mm grid					
U.T. & M.P.I	100% as per para 9.1 & 9.2 of PC-M-960					

* Examination on notched bar specimen in Longitudinal – Normal direction.

 एनपीसीआईएल NPCIL	NUCLEAR POWER CORPORATION OF INDIA LTD		
	ATOMIC POWER PROJECT		Page No. : 48 of 48
	TECHNICAL SPECIFICATION FOR QUENCHED & TEMPERED LOW ALLOY AND OTHER CARBON STEEL FORGINGS FOR 700 MWE PROJECTS		Rev. No. : 1

BLEED CONDENSER FORGINGS

3. EXTENT OF TESTS FOR

- a) Nozzle Forgings
- b) Heater Nozzle

3.1	No. of Test Coupons	3 per forged bar (STC-A, STC-B & RTC) (Refer Fig. 15 of PC-M-960)
3.2	Location of Test Coupons	On opposite faces - Diametrically opposite
3.3	Condition of Test Coupons	Simulated Heat Treated
3.4	Extent of Tests	

Description	Direction 1)	Bottom of Ingot		Top of Ingot
		STC -A	RTC	STC -B
Tensile (RT)	T	1	1	1
Tensile (350°C)	T	1	1	1
Impact at - 15°C	T	3	3	3
Impact at +18°C	T	3	3	3
Drop weight test	T	2	--	--
Grain size and microstructure 2)		1		1
Product analysis		1		1
Hardness	At 200 x 200 mm grid			
U.T. & M.P.I	100% Refer 9.1 & 9.2 of PC-M-960			

Notes :


- 1) For nozzles of size 160 NB and less, the specimens are to be taken from longitudinal direction.
- 2) Examination on notched bar specimen in Longitudinal – Normal direction.
Production weld test coupons (PWTC) wherever required shall be supplied as per clause no. 8.1 (iv) of PC-M-960.

2-93-170-05228
DRAWING NO.



ALL DIMENSIONS ARE IN MILLIMETERS

NOTES:-


1. APPLICABLE SPECIFICATIONS :
1) PC-M-960
2. MATERIAL SPECIFICATION : SA350 Gr. LF2 NORMALISED.
3. SURFACE FINISH : $\sqrt{3.2}$ ON INNER SURFACES, & $\sqrt{6.3}$ ON ALL OTHER SURFACES.
4. THE NOZZLE SHALL BE SUPPLIED IN FINISH MACHINED CONDITION AS SHOWN.
5. FINISHED NOZZLE SHALL BE SUBJECTED TO 100% M.T AS PER PC-M-960.
6. THE NOZZLE SHALL ALSO BE CHECKED BY 100% U.T AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. THE COMPONENT SHALL BE FORGED AS CLOSE TO THE FINISHED SHAPE AS POSSIBLE.
9. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE MANUFACTURE OF THE JOB.
10. WALL THICKNESS INDICATED ARE MINIMUM VALUES.
11. F.T.C AS PER SPECIFICATION PC-M-960 SHALL BE SUPPLIED ALONG WITH THE FINISHED NOZZLE.
12. APPROXIMATE WEIGHT : 207 kg

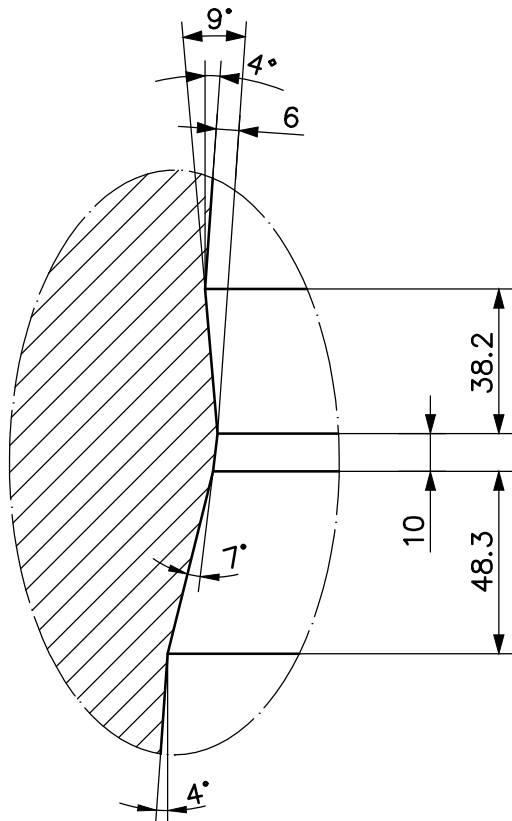

DETAIL-C
(1: 2)

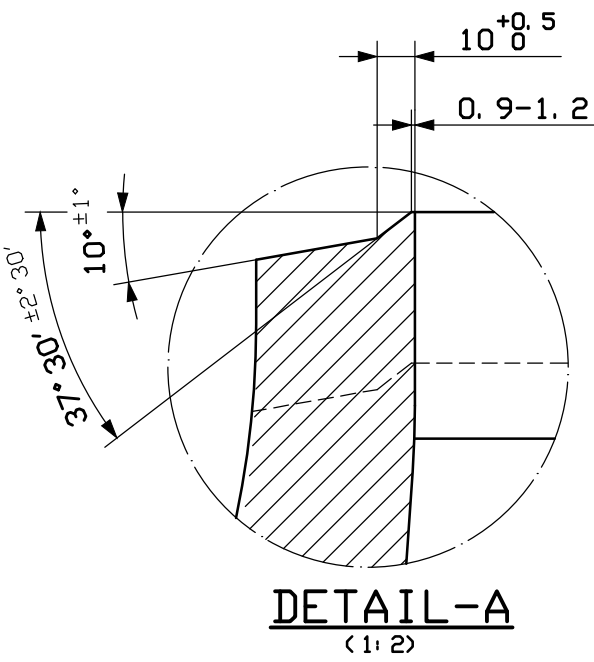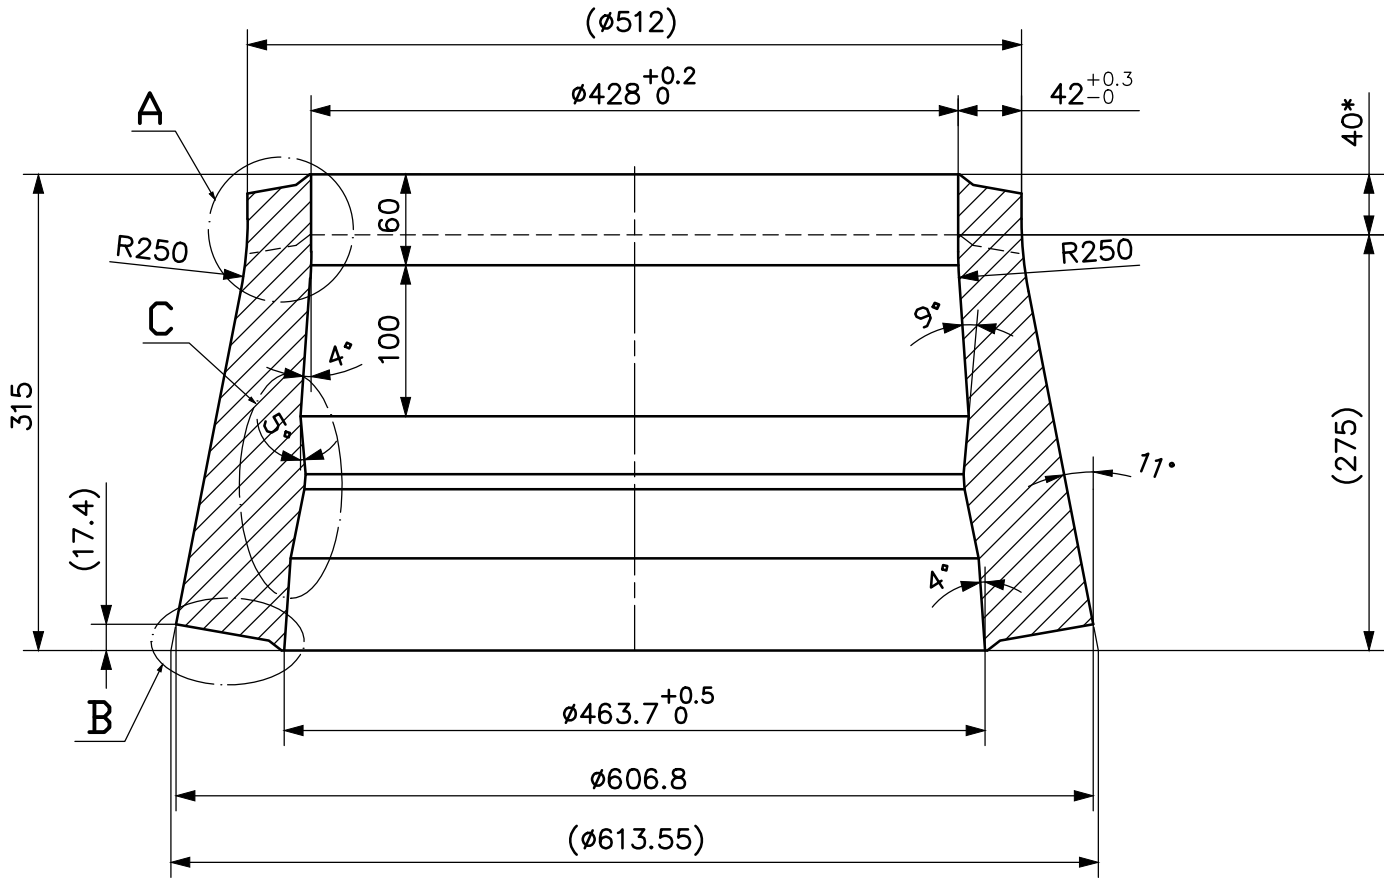

DETAIL-A
(1: 2)

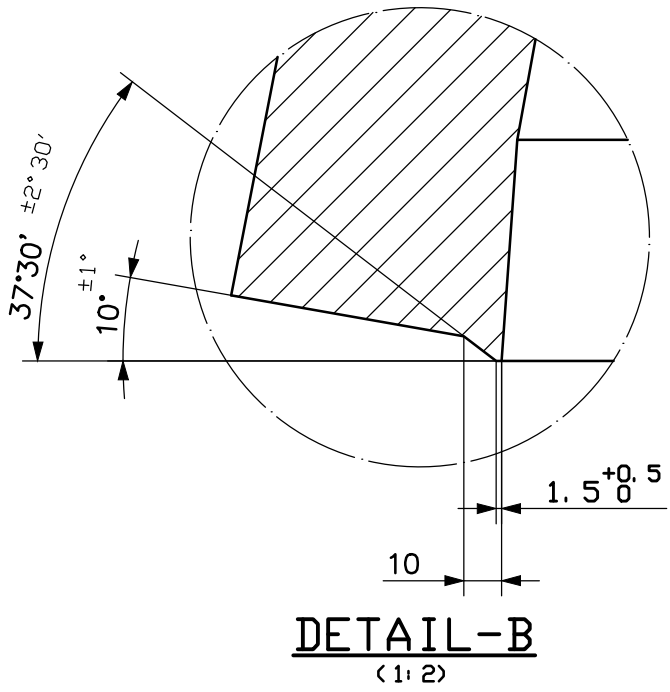

DETAIL-B
(1: 2)


* - OVERLENGTH FOR PRESSURE TEST.
(DOTTED LINE INDICATED FOR FINAL MACHINING IS ONLY FOR INFORMATION)

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR			
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°		
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'		
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'		
30 TO 120	± 0.3	-	-	120 TO 400	± 10'		
120 TO 400	± 0.5	-	-	OVER 400	± 5'		

REV 01	DATE 130117	ALTERED : CHD&APPD : <i>[Signature]</i>
THICKNESS INCREASED BY 5% BASED ON CUSTOMER'S REQUIREMENT.		

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.





TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT		700MWe/GHAVP-1&2						
	Bharat Heavy Electricals Ltd UNIT: HIGH PRESSURE BOILER PLANT TIRUCHIRAPALLI - 620014		DRN N.K.	SIGNATURE <i>[Signature]</i>	DATE 090814	NO. OF VAR		
			CHD AK/SM	<i>[Signature]</i>	090814			
			APPD A.S	<i>[Signature]</i>	090814			
DEPT NC	GRADE OF UNTOL DIM C/M/F		SCALE 1:5 ; 1:2	WEIGHT (Kg) --	REF TO ASSY / OLD DWG GHAVP-1&2/33111/4001/DD/ROO GHAVP-1&2/33111/4202/DD/ROO		ITEM NO	NO OF ITEMS
CODE 150	TITLE PRIMARY INLET NOZZLE (FORGING)			CARD CODE U 01	DRAWING NO : 2-93-170-05228		REV 01	

2-93-170-05229
DRAWING NO.

ALL DIMENSIONS ARE IN MILLIMETERS

NOTES:-

1. APPLICABLE SPECIFICATIONS :
1) PC-M-960
2. MATERIAL SPECIFICATION : SA350 Gr. LF2 NORMALISED.
3. SURFACE FINISH : $\sqrt{3.2}$ ON INNER SURFACES, & $\sqrt{6.3}$ ON ALL OTHER SURFACES.
4. THE NOZZLE SHALL BE SUPPLIED IN FINISH MACHINED CONDITION AS SHOWN.
5. FINISHED NOZZLE SHALL BE SUBJECTED TO 100% M.T AS PER PC-M-960.
6. THE NOZZLE SHALL ALSO BE CHECKED BY 100% U.T AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. THE COMPONENT SHALL BE FORGED AS CLOSE TO THE FINISHED SHAPE AS POSSIBLE.
9. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE MANUFACTURE OF THE JOB.
10. WALL THICKNESS INDICATED ARE MINIMUM VALUES.
11. F.T.C AS PER SPECIFICATION PC-M-960 SHALL BE SUPPLIED ALONG WITH THE FINISHED NOZZLE.
12. APPROXIMATE WEIGHT : 269 kg

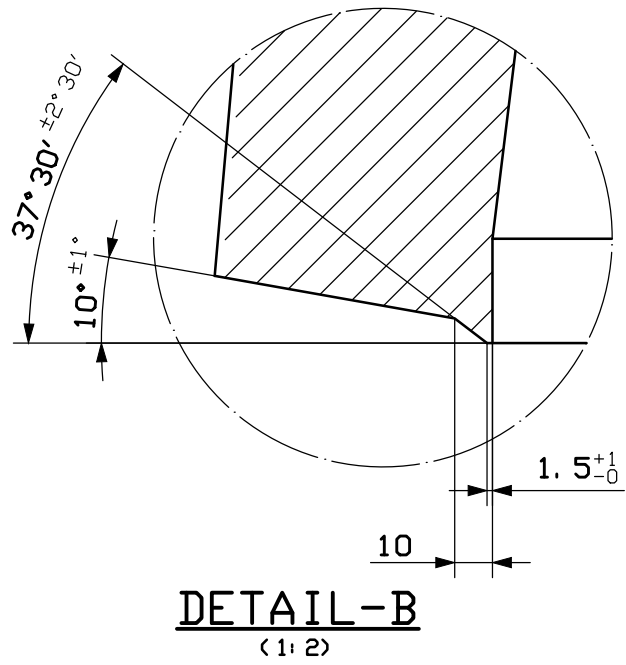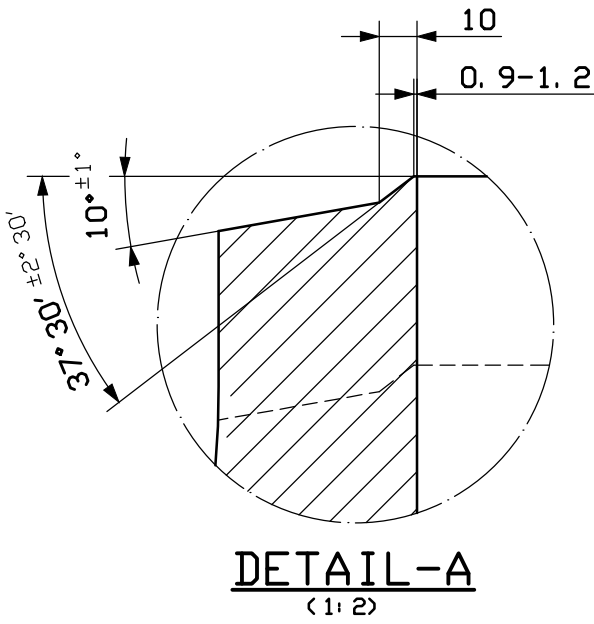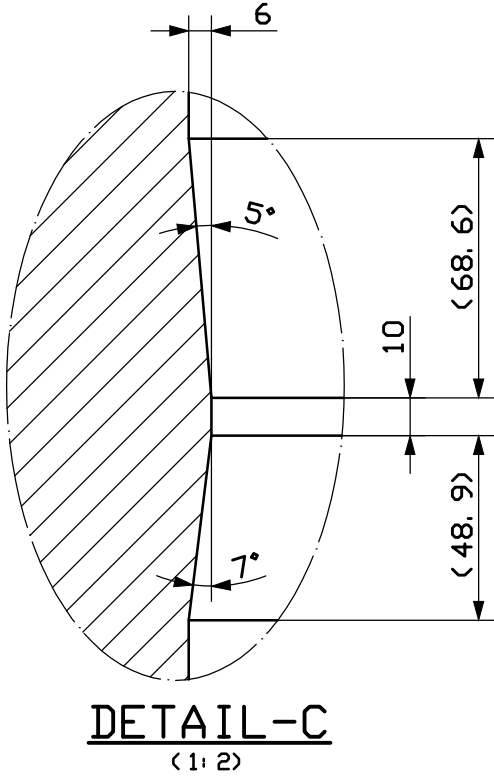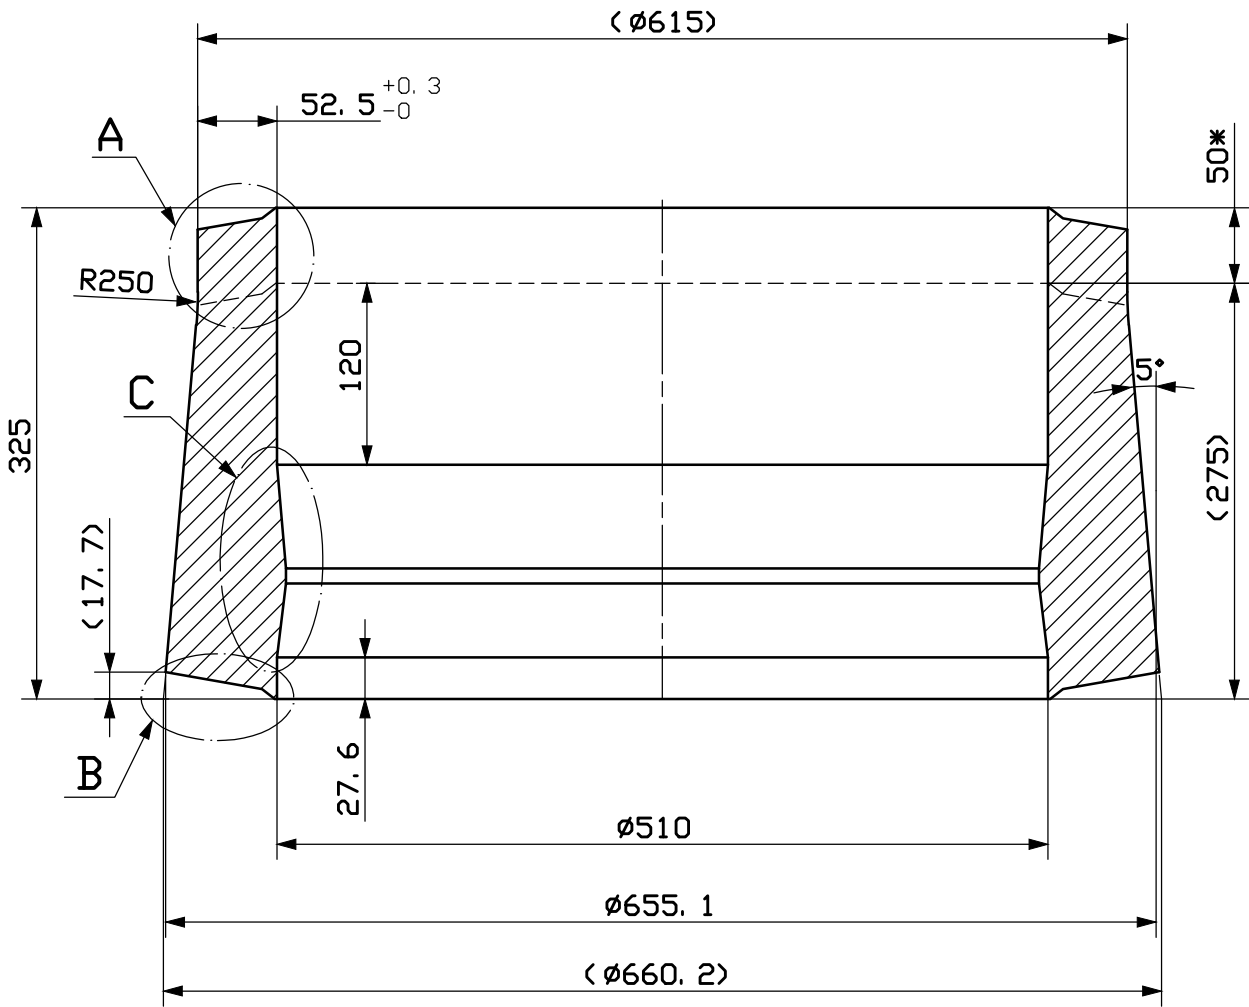

* - OVERLENGTH FOR PRESSURE TEST.
(DOTTED LINE INDICATED FOR FINAL MACHINING IS ONLY FOR INFORMATION)

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR		
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°	
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'	
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'	
30 TO 120	± 0.3	—	—	120 TO 400	± 10'	
120 TO 400	± 0.5	—	—	OVER 400	± 5'	

REV 01	DATE 130117	ALTERED : CHD&APPD : <i>[Signature]</i>
THICKNESS INCREASED BY 5% BASED ON CUSTOMER'S REQUIREMENT.		

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.

TYPE OF PRODUCT
OR NAME OF
CUSTOMER/PROJECT

700MWe/GHAVP-1&2




Bharat Heavy Electricals Ltd
UNIT: HIGH PRESSURE BOILER PLANT
TIRUCHIRAPALLI - 620014

DRN N.K.	SIGNATURE <i>[Signature]</i>	DATE 090814	NO. OF VAR
CHD AK/SM	<i>[Signature]</i>	090814	
APPD A.S	<i>[Signature]</i>	090814	

DEPT
NC
CODE
150

GRADE OF
UNTOL DIM
C/M/F



SCALE
1:5 ; 1:2

WEIGHT (Kg)
—

REF TO ASSY / OLD DWG
GHAVP-1&2/33111/4001/DD/R00
GHAVP-1&2/33111/4203/DD/R00

ITEM
NO
REV

TITLE
PRIMARY OUTLET NOZZLE
(FORGING)

CARD
CODE
U 01

DRAWING NO :
2-93-170-05229

REV
01


Size A2

2-93-170-05232
DRAWING NO.

ALL DIMENSIONS ARE IN MILLIMETERS

NOTES:-

1. APPLICABLE SPECIFICATIONS :
1) PC-M-960
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415 - 16Mo3.
3. SURFACE FINISH : $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE NOZZLE SHALL BE SUPPLIED IN FINISH MACHINED CONDITION AS SHOWN.
5. THE NOZZLE SHALL BE SUBJECTED TO 100% U.T IN PROOF MACHINED CONDITION AS PER PC-M-960.
6. FINISHED NOZZLE SHALL BE SUBJECTED TO 100% M.T AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. THE COMPONENT SHALL BE FORGED AS CLOSE TO THE FINISHED SHAPE AS POSSIBLE.
9. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE MANUFACTURE OF THE JOB.
10. THE PROOF MACHINED CONDITION DIMENTIONS OF U.T PROCEDURE WILL BE $\varnothing 112 \times \varnothing 18 \times 208$ LENGTH.
11. APPROXIMATE WEIGHT : 8.3 kg

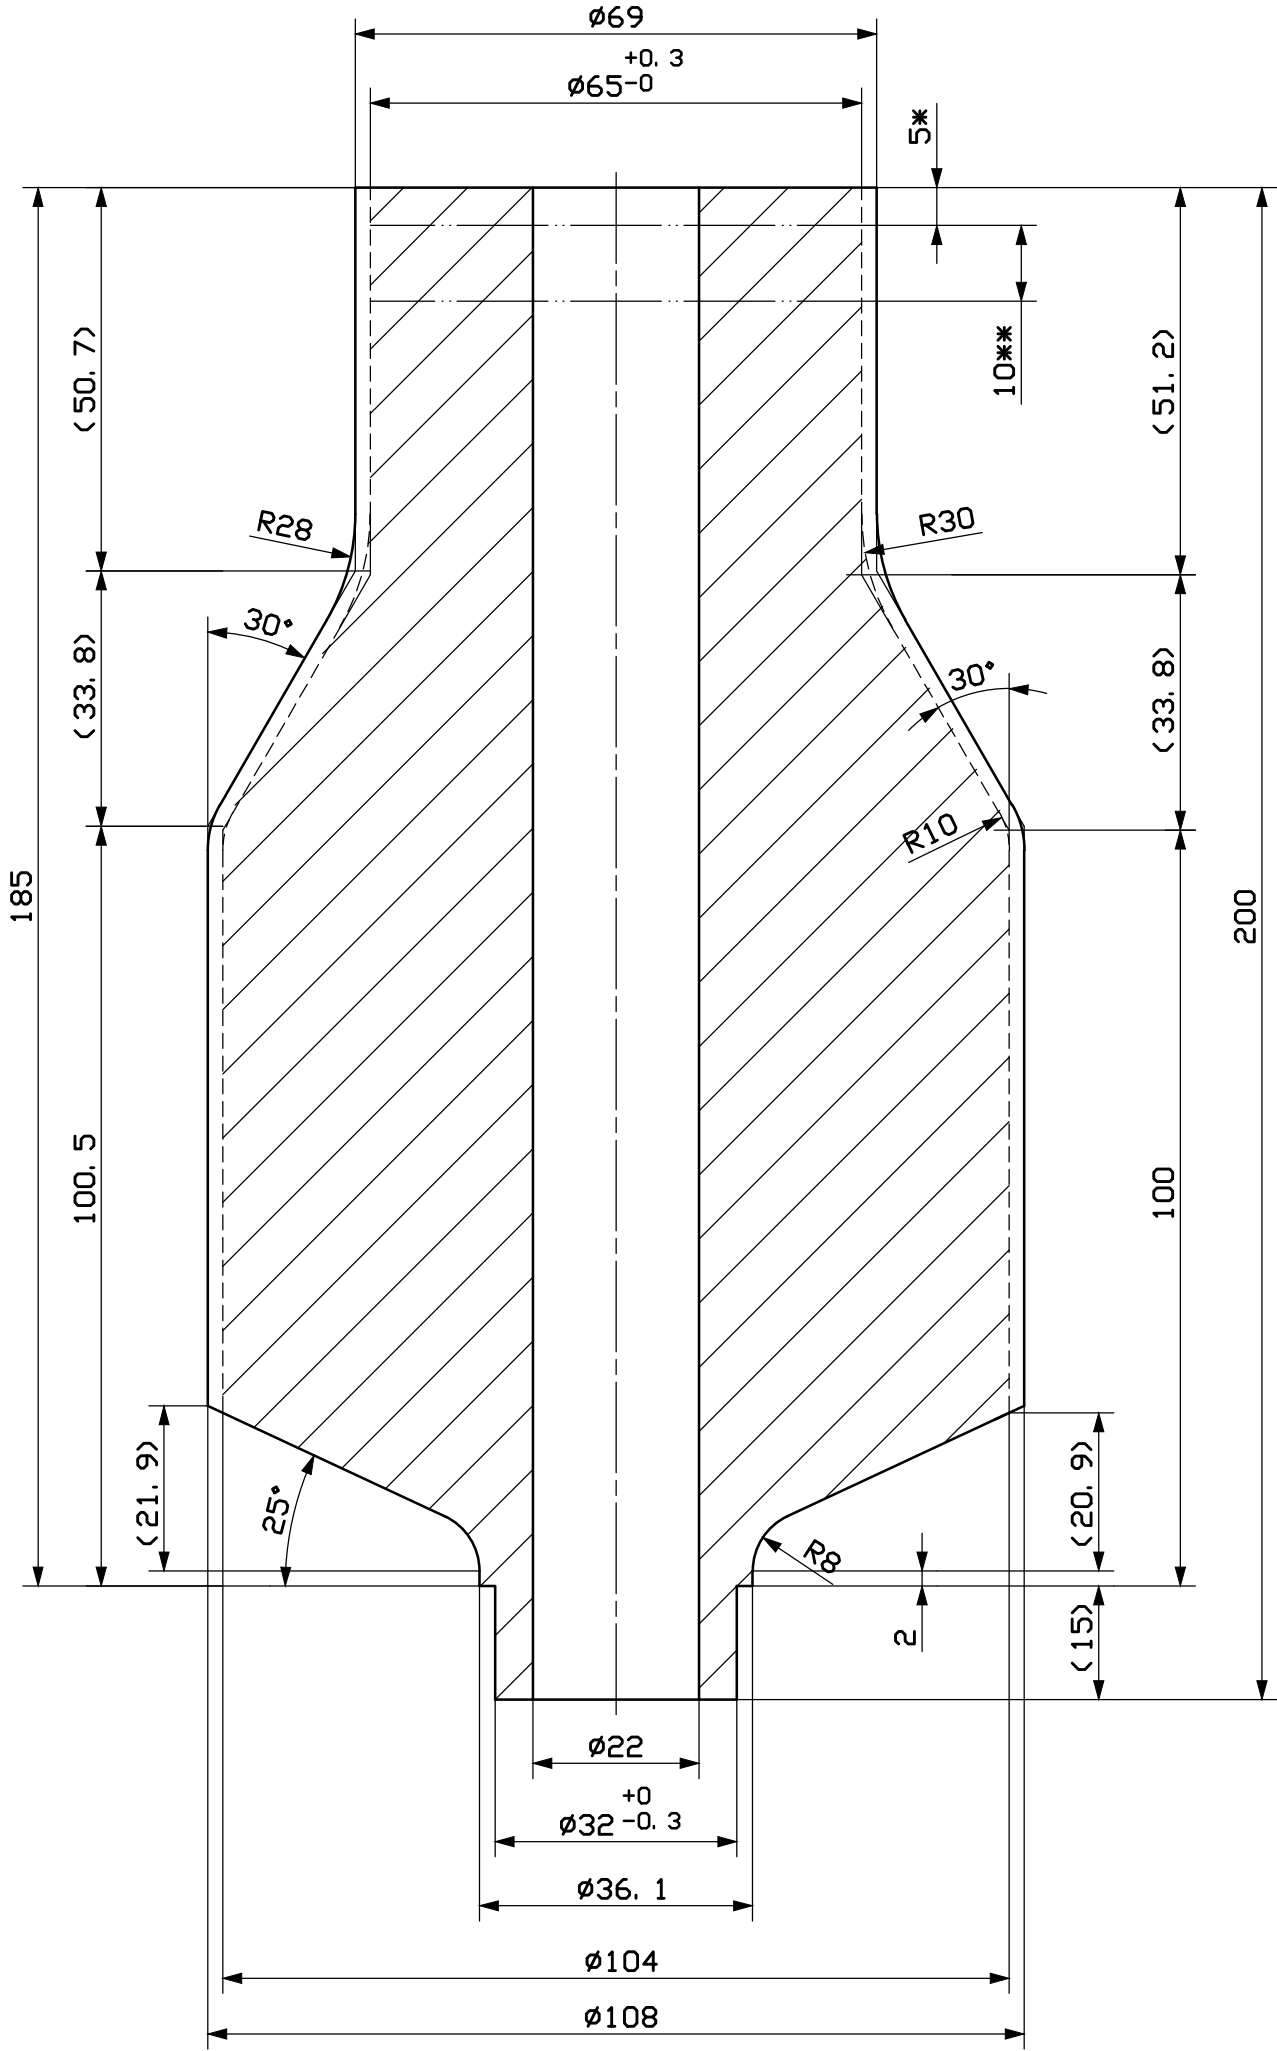

* - MACHINING ALLOWANCE
(DOTTED LINE INDICATED FOR FINAL MACHINING IS ONLY FOR INFORMATION)


** - OVERLENGTH FOR PRESSURE TEST

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR			
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°		
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'		
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'		
30 TO 120	± 0.3	-	-	120 TO 400	± 10'		
120 TO 400	± 0.5	-	-	OVER 400	± 5'		

REV 01	DATE 130117	ALTERED : CHD&APPD : <i>[Signature]</i>
THICKNESS INCREASED BY 5% BASED ON CUSTOMER'S REQUIREMENT.		

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.


TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT		700MWe/GHAVP-1&2						
	Bharat Heavy Electricals Ltd		DRN	NAME N.K.	SIGNATURE <i>[Signature]</i>	DATE 120814	NO. OF VAR	
	UNIT: HIGH PRESSURE BOILER PLANT		CHD	NKK/SM	<i>[Signature]</i>	120814		
	TIRUCHIRAPALLI - 620014		APPD	AS	<i>[Signature]</i>	120814		
DEPT NC	GRADE OF UNTOL DIM C/M/F		SCALE 1:1	WEIGHT (Kg)	REF TO ASSY / OLD DWG GHVP-1&2/33111/4204/DD/ROO		ITEM NO	No OF ITEMS
CODE 150								
TITLE BLOW DOWN NOZZLE (FORGING)				CARD CODE U 01	DRAWING NO : 2-93-170-05232		REV 01	

2-93-170-05234
DRAWING NO.

ALL DIMENSIONS ARE IN MILLIMETERS

NOTES:-

1. APPLICABLE SPECIFICATIONS :
1) PC-M-960
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415 - 16Mo3.
3. SURFACE FINISH : $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE NOZZLE SHALL BE SUPPLIED IN FINISH MACHINED CONDITION AS SHOWN.
5. THE NOZZLE SHALL BE SUBJECTED TO 100% U.T IN PROOF MACHINED CONDITION AS PER PC-M-960.
6. FINISHED NOZZLE SHALL BE SUBJECTED TO 100% M.T AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. THE COMPONENT SHALL BE FORGED AS CLOSE TO THE FINISHED SHAPE AS POSSIBLE.
9. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE MANUFACTURE OF THE JOB.
10. APPROXIMATE WEIGHT : 3.4 kg
11. THE PROOF MACHINED CONDITION DIMENSIONS OF UT PROCEDURE WILL BE $\varnothing 70 \times 168$ LENGTH.

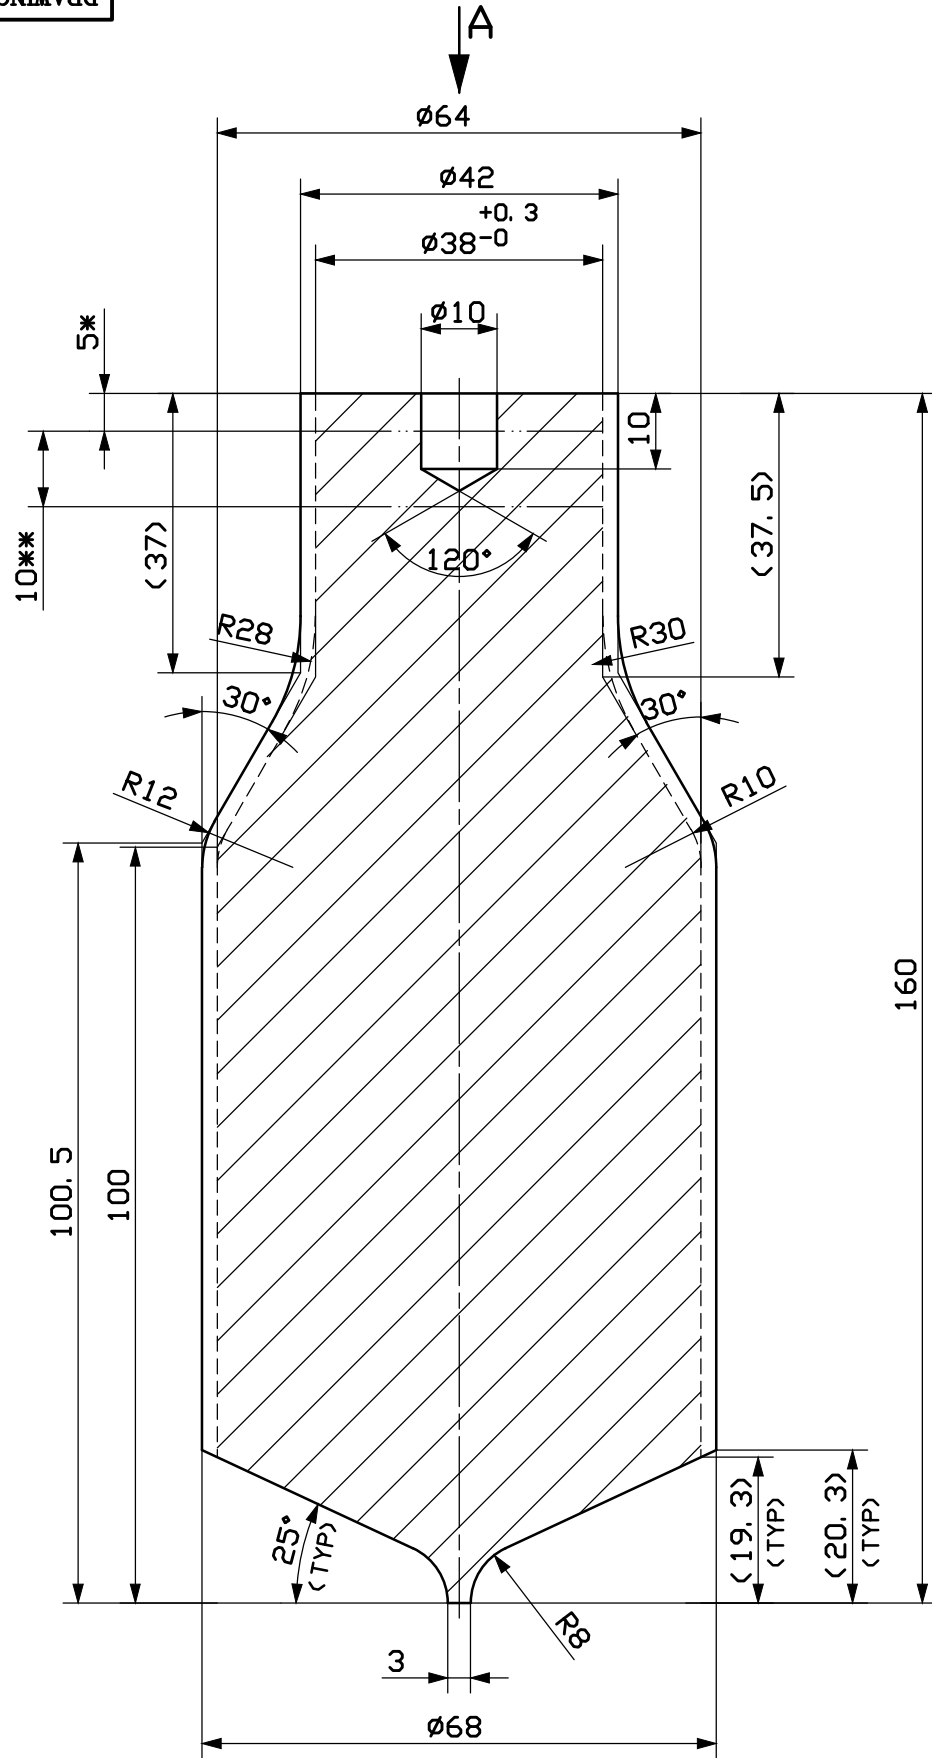

VIEW-A
(1:1)

* - MACHINING ALLOWANCE
(DOTTED LINE INDICATED FOR FINAL MACHINING IS ONLY FOR INFORMATION)


** - OVERLENGTH FOR PRESSURE TEST

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR			
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°		
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'		
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'		
30 TO 120	± 0.3	—	—	120 TO 400	± 10'		
120 TO 400	± 0.5	—	—	OVER 400	± 5'		

REV 01	DATE 130117	ALTERED : CHD&APPD : <i>[Signature]</i>
THICKNESS INCREASED BY 5% BASED ON CUSTOMER'S REQUIREMENT.		

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.


TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT		700MWe/GHAVP-1&2						
	Bharat Heavy Electricals Ltd		DRN	NAME N.K.	SIGNATURE <i>[Signature]</i>	DATE 120814	NO. OF VAR	
	UNIT: HIGH PRESSURE BOILER PLANT		CHD	NKK/SM	<i>[Signature]</i>	120814		
	TIRUCHIRAPALLI - 620014		APPD	AS	<i>[Signature]</i>	120814		
DEPT NC	GRADE OF UNTOL DIM C/M/F		SCALE 1:1	WEIGHT (Kg) —	REF TO ASSY / OLD DWG GHAVP-1&2/33111/4207/DD/ROO		ITEM NO	No OF ITEMS
CODE 150	TITLE LEVEL TAP NOZZLE (FORGING)			CARD CODE U 01	DRAWING NO : 2-93-170-05234		REV 01	

2-93-170-05235
DRAWING NO.

ALL DIMENSIONS ARE IN MILLIMETERS

NOTES:-

1. APPLICABLE SPECIFICATIONS :
1) PC-M-960
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415 - 16Mo3.
3. SURFACE FINISH : $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE NOZZLE SHALL BE SUPPLIED IN FINISH MACHINED CONDITION AS SHOWN.
5. THE NOZZLE SHALL BE SUBJECTED TO 100% U.T IN PROOF MACHINED CONDITION AS PER PC-M-960.
6. FINISHED NOZZLE SHALL BE SUBJECTED TO 100% M.T AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. THE COMPONENT SHALL BE FORGED AS CLOSE TO THE FINISHED SHAPE AS POSSIBLE.
9. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE MANUFACTURE OF THE JOB.
10. THE PROOF MACHINED CONDITION DIMENTIONS OF U.T PROCEDURE WILL BE $\varnothing 70 \times 123$ LENGTH.
11. APPROXIMATE WEIGHT : 2.6 kg

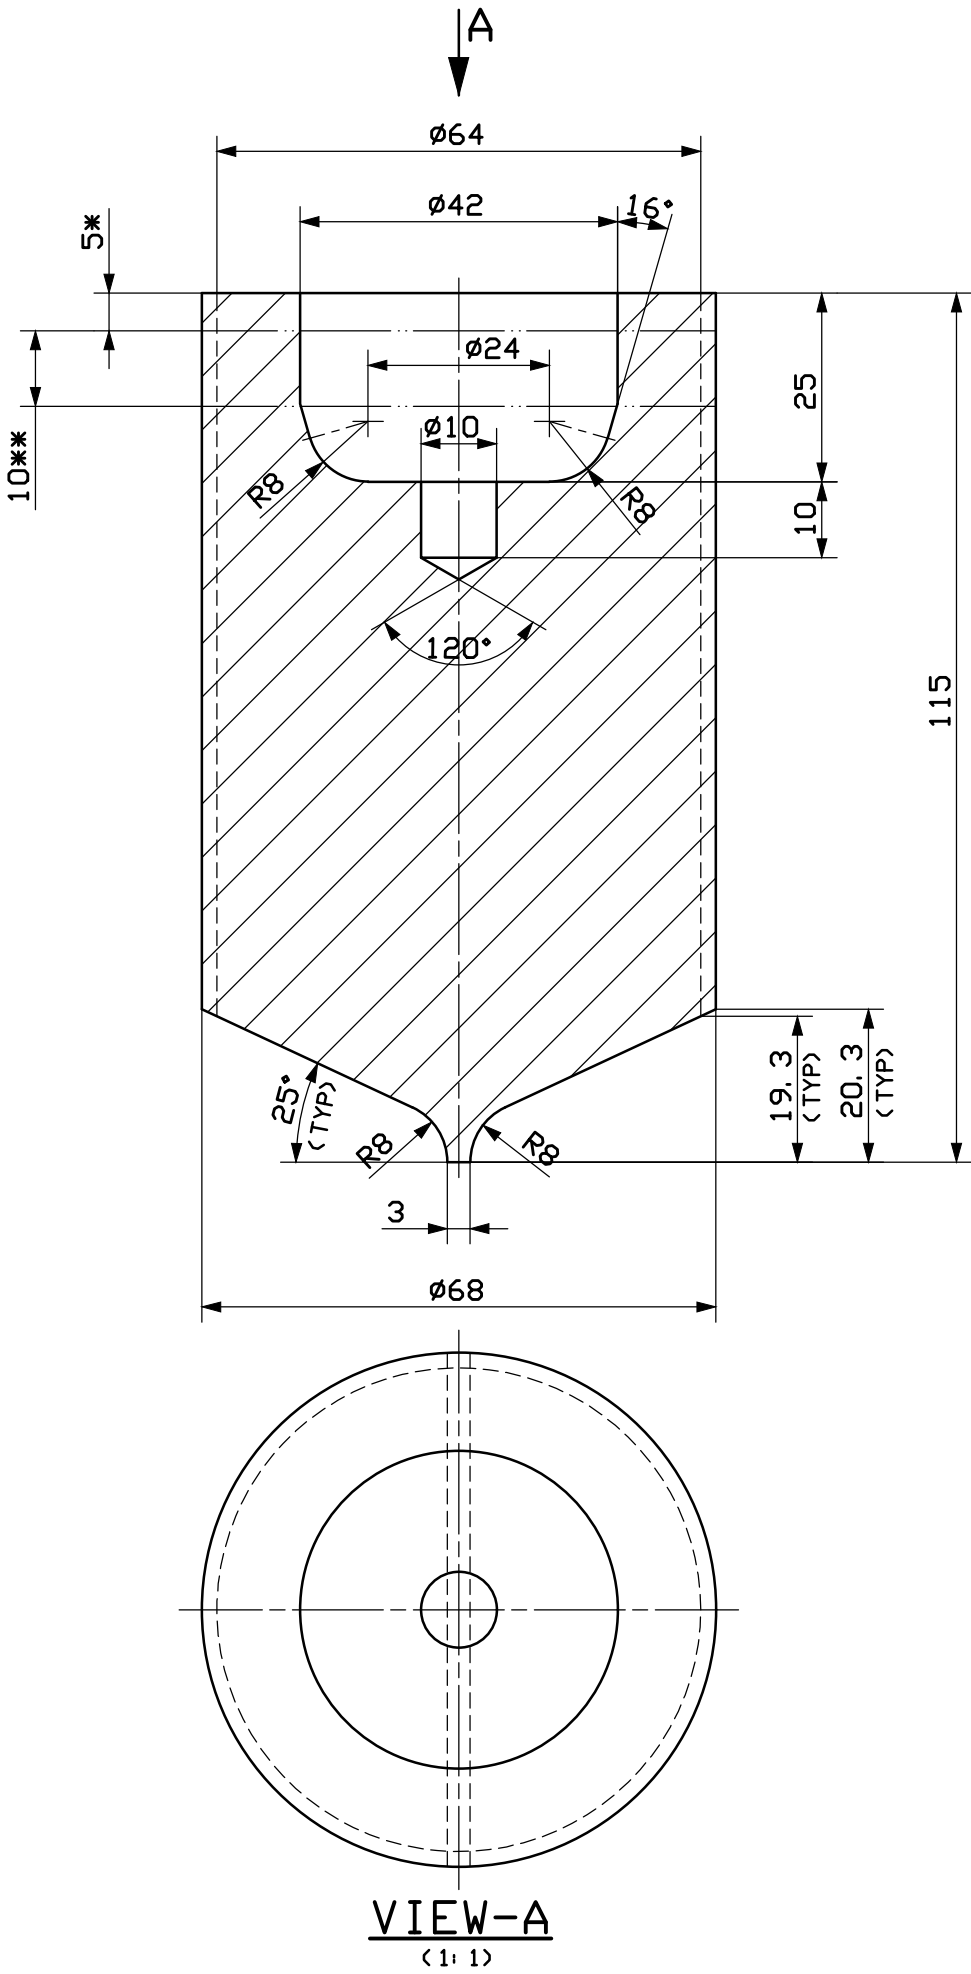

* - MACHINING ALLOWANCE
(DOTTED LINE INDICATED FOR FINAL MACHINING IS ONLY FOR INFORMATION)




** - OVERLENGTH FOR PRESSURE TEST

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-n)

LINEAR				ANGULAR			
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°		
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'		
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'		
30 TO 120	± 0.3	—	—	120 TO 400	± 10'		
120 TO 400	± 0.5	—	—	OVER 400	± 5'		

REV	DATE	ALTERED :
		CHD&APPD :

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.


TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT		700MWe/GHAVP-1						
	Bharat Heavy Electricals Ltd		DRN	NAME N.K.	SIGNATURE 	DATE 241117	NO. OF VAR	
	UNIT: HIGH PRESSURE BOILER PLANT		CHD	NKK/RRV		241117		
	TIRUCHIRAPALLI - 620014		APPD	A.S		241117		
DEPT NC	GRADE OF UNTOL DIM C/M/F		SCALE 1:1	WEIGHT (Kg)	REF TO ASSY / OLD DWG		ITEM NO	NO OF ITEMS
CODE 150	TITLE TEMPERATURE MEASUREMENT NOZZLE (FORGING)			CARD CODE U 01	DRAWING NO : 2-93-170-05235		REV 00	

2-93-170-05239
DRAWING NO.

ALL DIMENSIONS ARE IN MILLIMETERS

NOTES:-

1. APPLICABLE SPECIFICATIONS :
1) PC-M-960
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415-16Mo3
3. SURFACE FINISH : $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE NOZZLE SHALL BE SUPPLIED IN FINISH MACHINED CONDITION AS SHOWN.
5. THE NOZZLE SHALL BE SUBJECTED TO 100% U.T IN PROOF MACHINED CONDITION AS PER PC-M-960.
6. FINISHED NOZZLE SHALL BE SUBJECTED TO 100% M.T AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. THE COMPONENT SHALL BE FORGED AS CLOSE TO THE FINISHED SHAPE AS POSSIBLE.
9. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE MANUFACTURE OF THE JOB.
10. APPROXIMATE WEIGHT : 3.25 kg
11. THE PROOF MACHINED CONDITION DIMENSIONS OF UT PROCEDURE WILL BE $\phi 70 \times 168$ LENGTH.

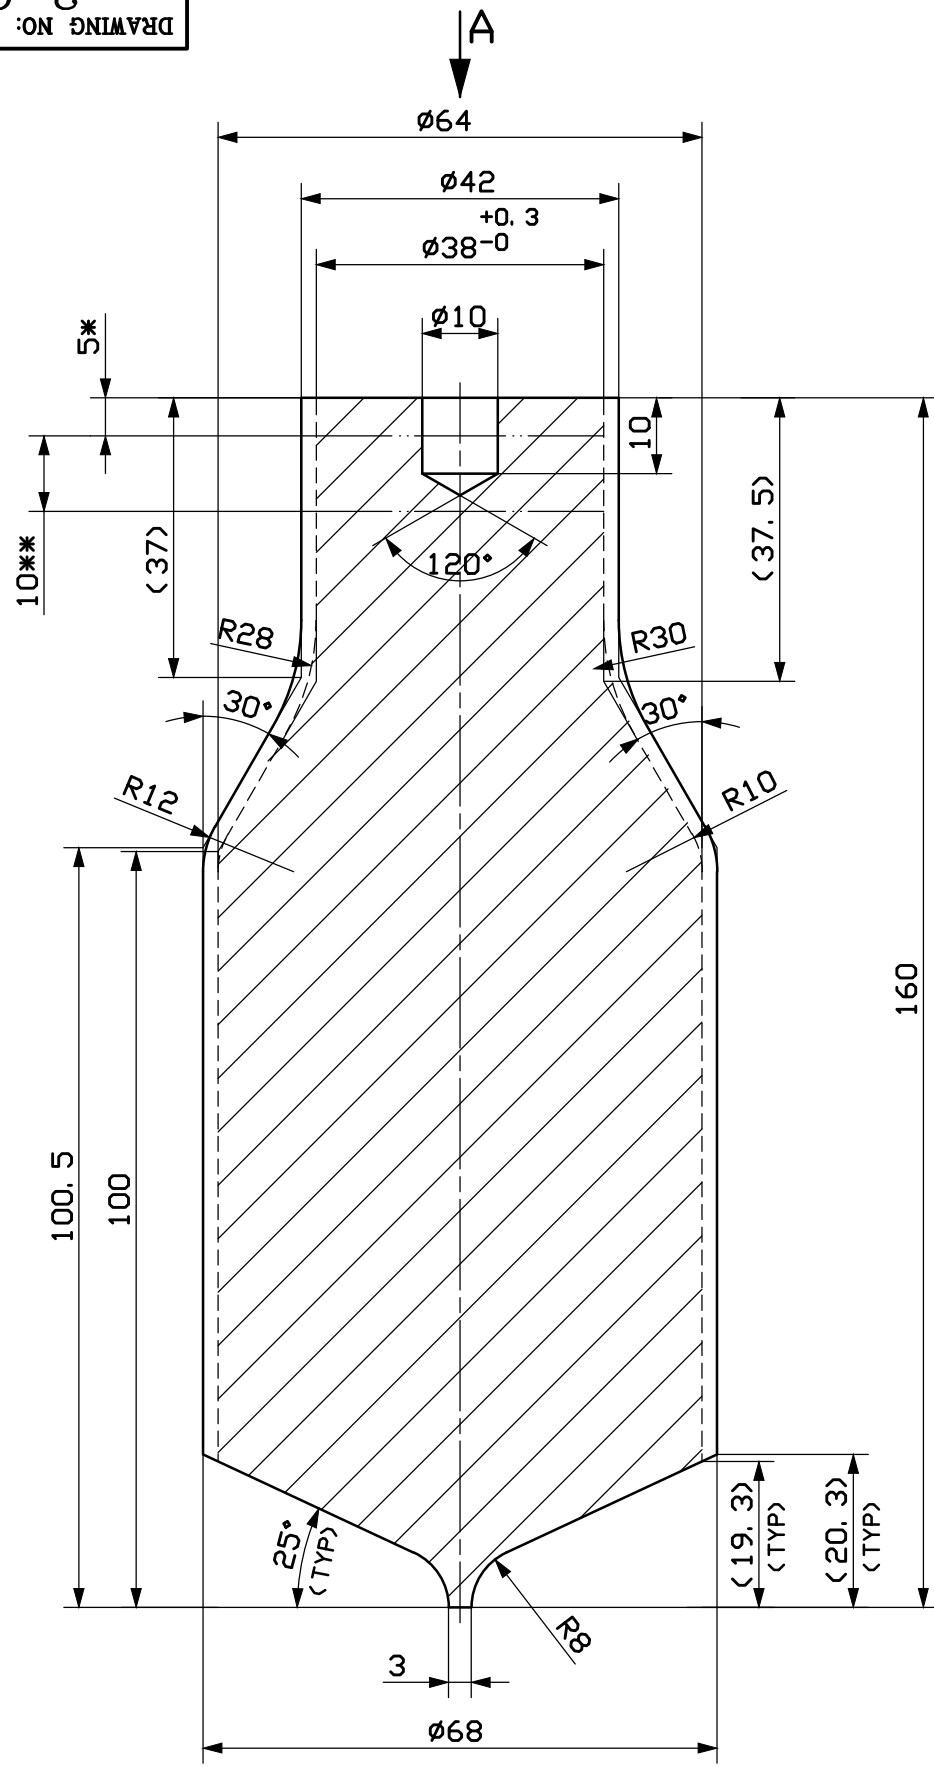

VIEW-A
(1:1)

* - MACHINING ALLOWANCE
(DOTTED LINE INDICATED FOR FINAL MACHINING IS ONLY FOR INFORMATION)


** - OVERLENGTH FOR PRESSURE TEST

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR		
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°	
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'	
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'	
30 TO 120	± 0.3	-	-	120 TO 400	± 10'	
120 TO 400	± 0.5	-	-	OVER 400	± 5'	



REV	DATE	ALTERED :
01	130117	CHD&APPD : <i>[Signature]</i>
THICKNESS INCREASED BY 5% BASED ON CUSTOMER'S REQUIREMENT.		

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.

TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT		700MWe/GHAVP-1&2					
	Bharat Heavy Electricals Ltd		DRN	NAME N.K	SIGNATURE <i>[Signature]</i>	DATE 090814	NO. OF VAR
	UNIT: HIGH PRESSURE BOILER PLANT		CHD	AK/SM	<i>[Signature]</i>	090814	
	TIRUCHIRAPALLI - 620014		APPD	A.S	<i>[Signature]</i>	090814	
DEPT NC	GRADE OF UNTOL DIM C/M/F	SCALE  1:1	WEIGHT (Kg) 2.8	REF TO ASSY / OLD DWG GHA VP-1&2/33111/4019/DD/R00 GHA VP-1&2/33111/4205/DD/R00		ITEM NO	NO OF ITEMS
TITLE INSTRUMENTATION NOZZLE (FORGING)			CARD CODE U 01	DRAWING NO : 2-93-170-05239		REV 01	

2-93-170-05241
DRAWING NO.

ALL DIMENSIONS ARE IN MILLIMETERS

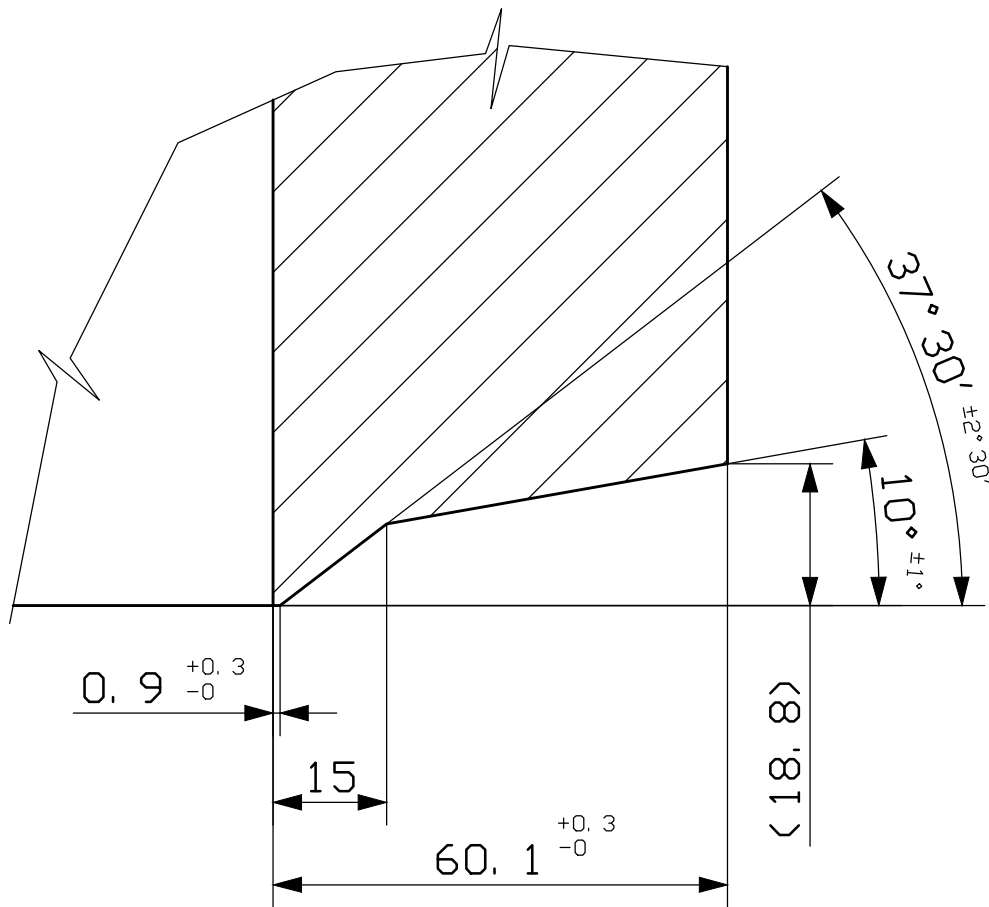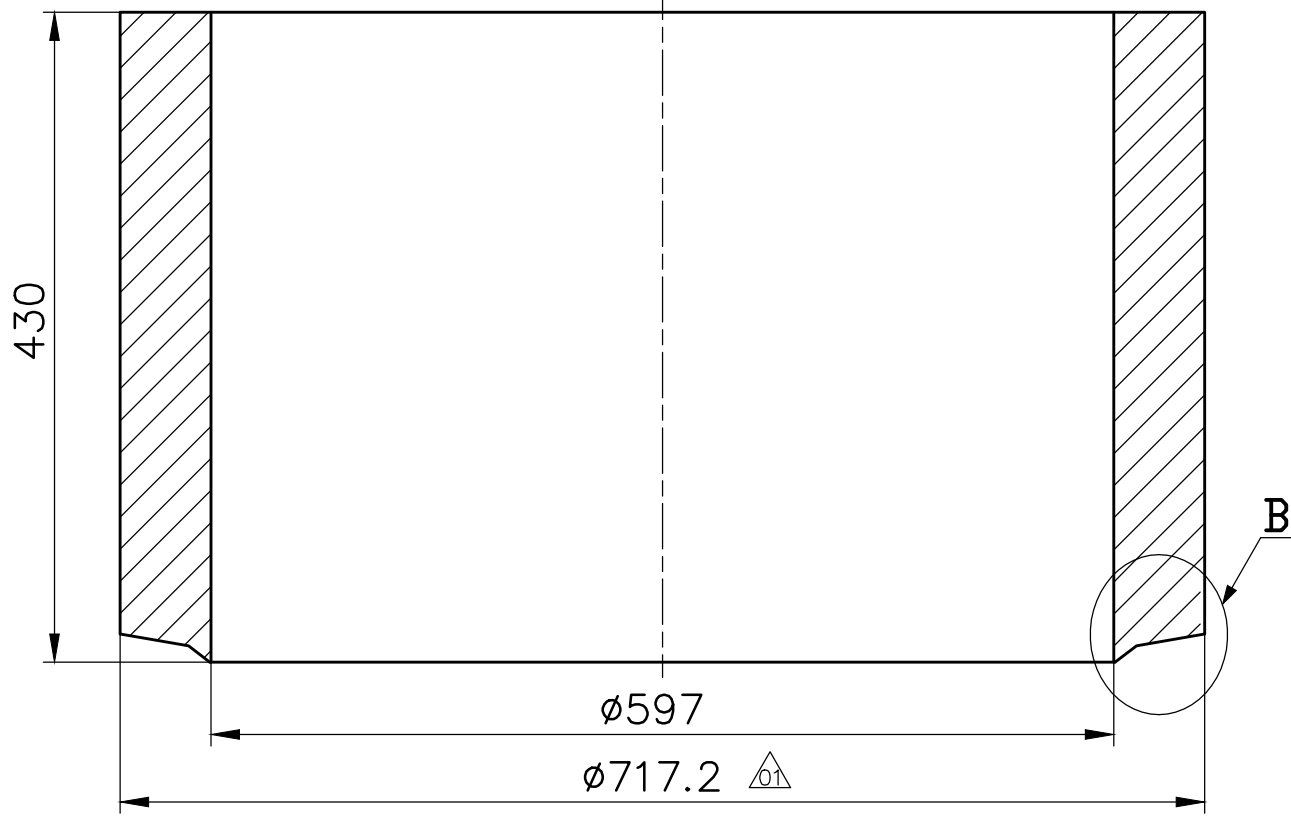

DETAIL-B
(1:1)

NOTES: -


1. APPLICABLE SPECIFICATIONS:
i) PC-M-960
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415-16Mo3
3. SURFACE FINISH $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE NOZZLE SHALL BE SUPPLIED IN FINISH MACHINED CONDITION AS SHOWN.
5. FINISHED NOZZLE SHALL BE SUBJECTED TO 100% M.T. AS PER PC-M-960.
6. THE NOZZLE SHALL ALSO BE CHECKED BY 100% U.T. AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE ON COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. THE COMPONENT SHALL BE FORGED AS CLOSE TO THE FINISHED SHAPE AS POSSIBLE.
9. DETAILED DRAWING INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE MANUFACTURE OF THE JOB.
10. WALL THICKNESS INDICATED ARE MINIMUM VALUES.
11. F.T.C. AS PER SPECIFICATION PC-M-960 SHALL BE SUPPLIED ALONG WITH THE FINISHED NOZZLE.

12. APPROXIMATE WEIGHT : 401 kg

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR		
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°	
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'	
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'	
30 TO 120	± 0.3	—	—	120 TO 400	± 10'	
120 TO 400	± 0.5	—	—	OVER 400	± 5'	

REV	DATE	ALTERED :
01	130117	CHD&APPD : <i>[Signature]</i>
THICKNESS INCREASED BY 5% BASED ON CUSTOMER'S REQUIREMENT.		


TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT		700MWe/GHAVP-1&2						
 05-228/D	Bharat Heavy Electricals Ltd UNIT: HIGH PRESSURE BOILER PLANT TIRUCHIRAPALLI - 620014		DRN	NAME N.K.	SIGNATURE <i>[Signature]</i>	DATE 090814	NO. OF VAR	
			CHD	AK/SM		090814		
			APPD	A.S	<i>[Signature]</i>	090814		
DEPT NC	GRADE OF UNTOL DIM C/M/F		SCALE 1:5 ; 1:2	WEIGHT (Kg) —	REF TO ASSY / OLD DWG GHAVP-1&2/33111/4019/DD/R00 GHAVP-1&2/33111/4211/DD/R00		ITEM NO	NO OF ITEMS
TITLE CONNECTION TO STEAM OUTLET NOZZLE				CARD CODE U 01	DRAWING NO : 2-93-170-05241		REV 01	

2-93-170-05244
DRAWING NO.


ALL DIMENSIONS ARE IN MILLIMETERS

NOTES:-

1. APPLICABLE SPECIFICATION : PC-M-960
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415 - 16Mo3.
3. SURFACE FINISH : $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE FLANGE SHALL BE SUPPLIED IN FULLY MACHINED CONDITION AS SHOWN.
5. FINISHED FLANGE SHALL BE SUBJECTED TO 100% M.T. AS PER PC-M-960.
6. THE FLANGE SHALL ALSO BE SUBJECTED TO 100% U.T. AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE JOB.
9. THE FORGINGS SHALL BE PACKED AND CRATED IN SUCH A MANNER TO BE SUITABLE FOR STORAGE IN TROPICAL CLIMATE. THE EDGES FOR WELDING SHALL BE SPECIALLY PROTECTED AGAINST DAMAGE.
10. APPROXIMATE WEIGHT : 382 kg

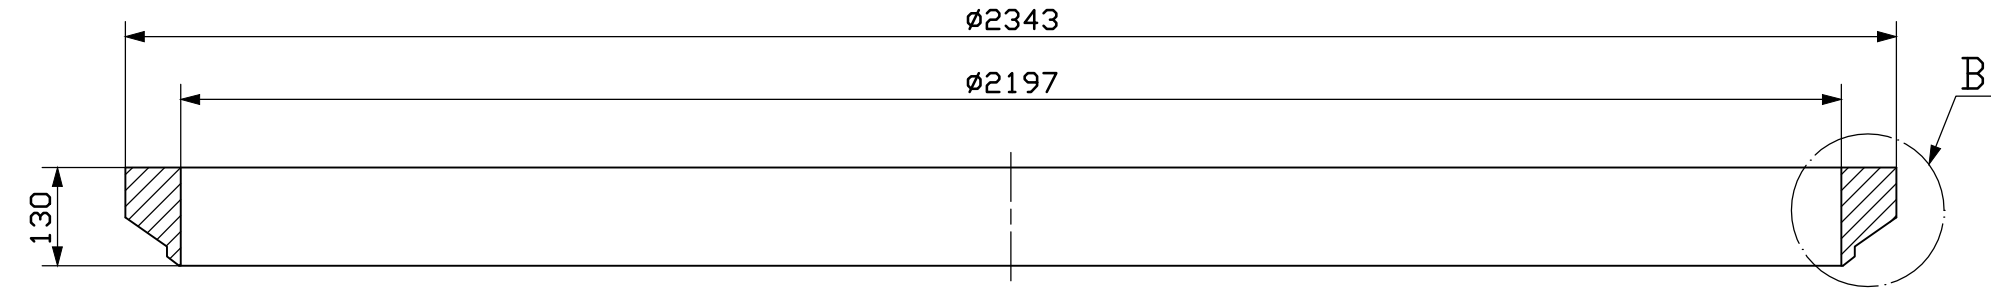

SECTION-AA
(1: 10)

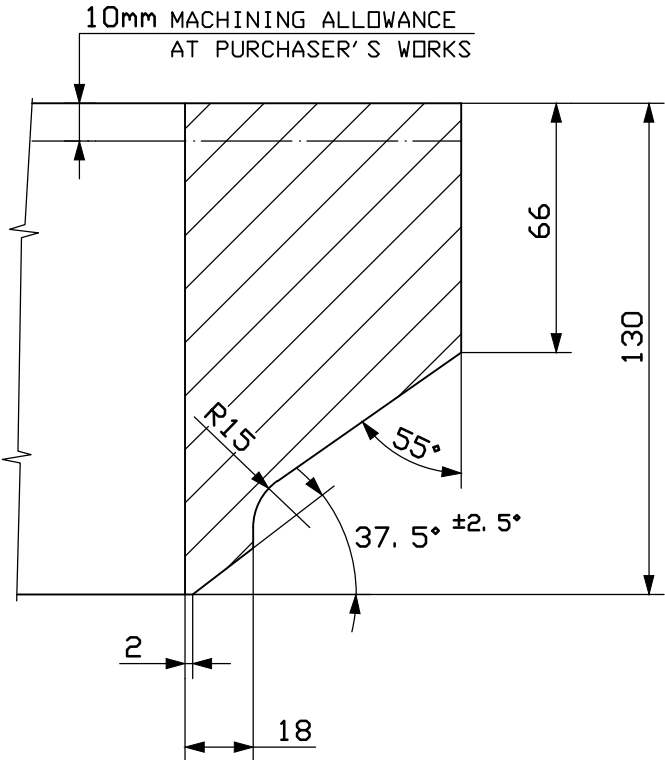

DETAIL-B
(1: 2)

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR		
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°	
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'	
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'	
30 TO 120	± 0.3	—	—	120 TO 400	± 10'	
120 TO 400	± 0.5	—	—	OVER 400	± 5'	

REV	DATE	ALTERED :
		CHD&APPD :

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.

TYPE OF PRODUCT
OR NAME OF
CUSTOMER/PROJECT

700MWe/GHAVP-1&2



Bharat Heavy Electricals Ltd
UNIT: HIGH PRESSURE BOILER PLANT
TIRUCHIRAPALLI - 620014



DRN	NAME N.K.	SIGNATURE	DATE	NO. OF VAR
CHD	NKK/SM		120814	
APPD	AS		120814	

DEPT NC	GRADE OF UNTOL DIM C/M/F	SCALE 1:10 ; 1:2	WEIGHT (Kg) 382	REF TO ASSY / OLD DWG	ITEM NO	NO OF ITEMS
CODE 150						

TITLE FLANGE-1 (FORGING)	CARD CODE U 01	DRAWING NO : 2-93-170-05244	REV 00
--------------------------------	----------------------	--------------------------------	-----------

96290-021-86-3

DRAWING NO:

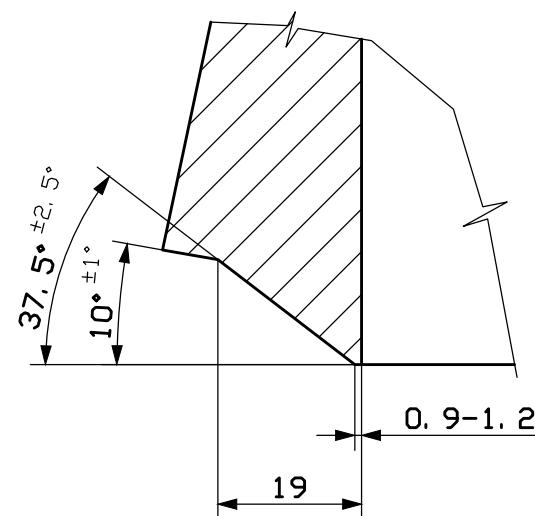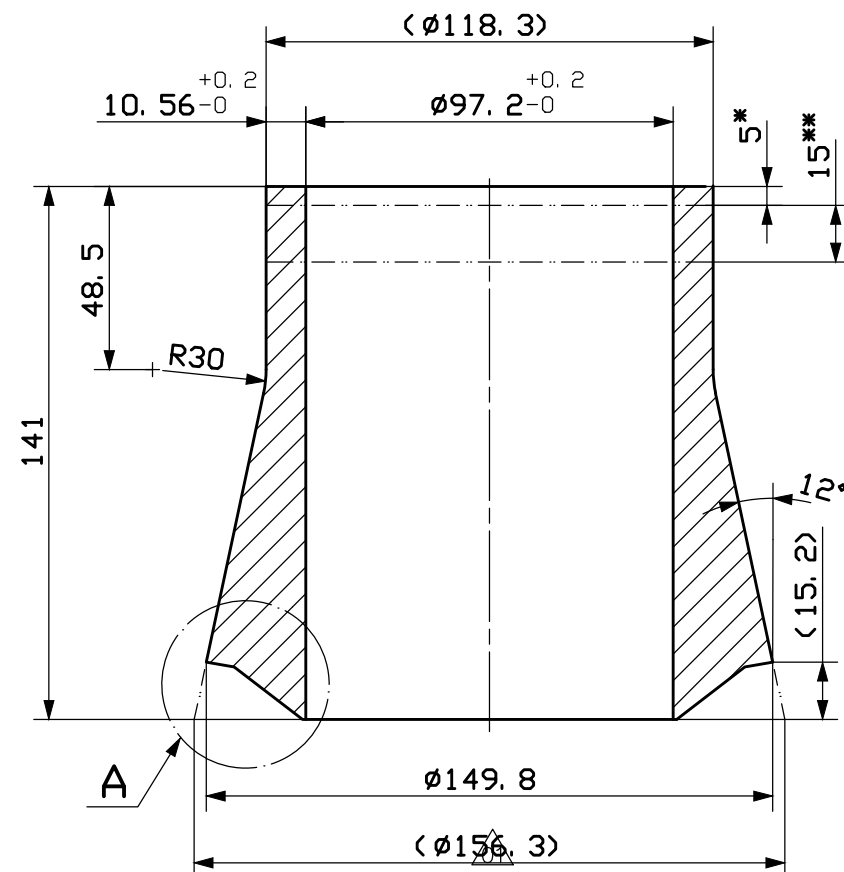DETAIL-A
(1:1)

NOTES:-

ALL DIMENSIONS ARE IN MILLIMETERS

1. APPLICABLE SPECIFICATIONS :
1) PC-M-960
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415 - 16Mo3.
3. SURFACE FINISH : $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE NOZZLE SHALL BE SUPPLIED IN FINISH MACHINED CONDITION AS SHOWN.
5. THE NOZZLE SHALL BE SUBJECTED TO 100% U.T IN PROOF MACHINED CONDITION AS PER PC-M-960.
6. FINISHED NOZZLE SHALL BE SUBJECTED TO 100% M.T AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. THE COMPONENT SHALL BE FORGED AS CLOSE TO THE FINISHED SHAPE AS POSSIBLE.
9. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE MANUFACTURE OF THE JOB.
10. WALL THICKNESS INDICATED ARE MINIMUM VALUES.
11. APPROXIMATE WEIGHT : 5.85 kg
12. THE PROOF MACHINED CONDITION DIMENSIONS OF UT PROCEDURE WILL BE ø156xø91(ID)x147 LENGTH.

- * - MACHINING ALLOWANCE.
** - OVERLENGTH FOR PRESSURE TEST.

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR	
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'
30 TO 120	± 0.3	—	—	120 TO 400	± 10'
120 TO 400	± 0.5	—	—	OVER 400	± 5'

REV	DATE	ALTERED :
01	130117	CHD&APPD : <i>[Signature]</i>

THICKNESS INCREASED BY 5% BASED ON CUSTOMER'S REQUIREMENT.

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.

TYPE OF PRODUCT
OR NAME OF
CUSTOMER/PROJECT


700MWe/GHAVP-1&2



Bharat Heavy Electricals Ltd
UNIT: HIGH PRESSURE BOILER PLANT
TIRUCHIRAPALLI - 620014

DEPT
NC
CODE
150

GRADE OF
UNTOL DIM
C/M/F



SCALE
1:2 ; 1:1

WEIGHT (Kg)

—

REF TO ASSY / OLD DWG
GHAVP-1&2/33111/4217/DD/ROO

ITEM NO

No OF ITEMS

TITLE
PDHRS NOZZLE
END PART (FORGING)

CARD
CODE
U 01


DRAWING NO :
3-93-170-05296

REV
01

Size A3

NOTES:-

1. APPLICABLE SPECIFICATION : PC-M-960.
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415 - 16Mo3.
3. SURFACE FINISH : $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE FLANGE SHALL BE SUPPLIED IN FULLY MACHINED CONDITION AS SHOWN.
5. FINISHED FLANGE SHALL BE SUBJECTED TO 100% M.T. AS PER PC-M-960.
6. THE FLANGE SHALL ALSO BE SUBJECTED TO 100% U.T. AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE JOB.
9. THE FORGINGS SHALL BE PACKED AND CRATED IN SUCH A MANNER TO BE SUITABLE FOR STORAGE IN TROPICAL CLIMATE.
10. APPROXIMATE WEIGHT : 202 kg




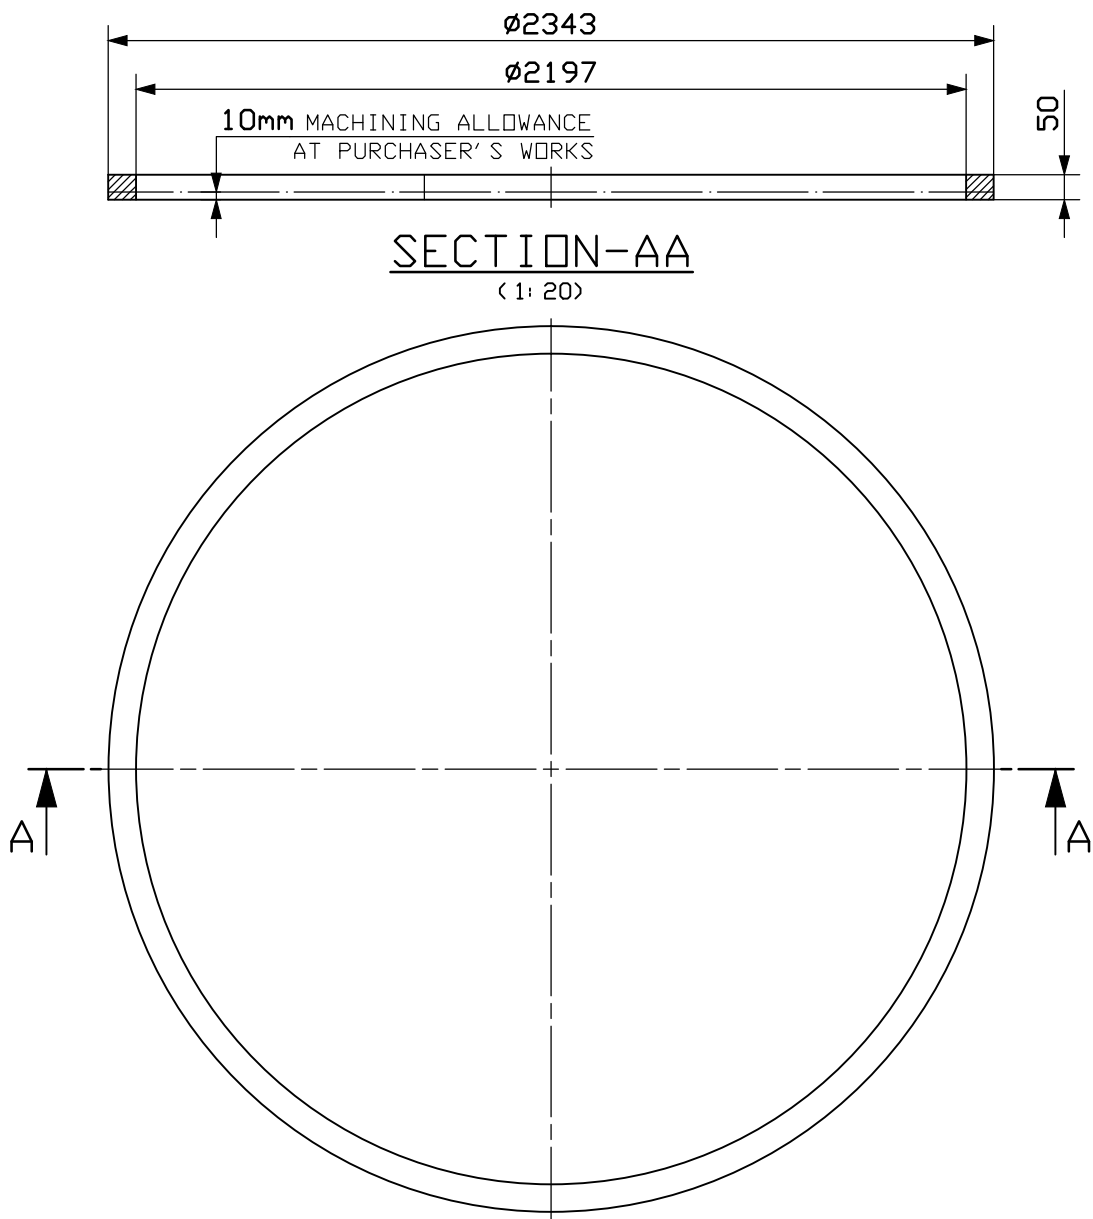


TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)


LINEAR				ANGULAR	
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'
30 TO 120	± 0.3	—	—	120 TO 400	± 10'
120 TO 400	± 0.5	—	—	OVER 400	± 5'

REV	DATE	ALTERED :
		CHD&APPD :

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.


TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT		700MW _e /GHAVP-1&2						
 05-229/D	Bharat Heavy Electricals Ltd		DRN	NAME N.K.	SIGNATURE 	DATE 120814	NO. OF VAR	
	UNIT: HIGH PRESSURE BOILER PLANT		CHD	NKK/SM		120814		
	TIRUCHIRAPALLI - 620014		APPD	AS		120814		
DEPT NC	GRADE OF UNTOL. DIM C/M/F		SCALE 1:20	WEIGHT (Kg)	REF TO ASSY / OLD DWG		ITEM NO	No OF ITEMS
CODE 150								
TITLE FLANGE-2 (FORGING)				CARD CODE U 01	DRAWING NO : 3-93-170-05306		REV 00	

3-93-170-05307
DRAWING NO:

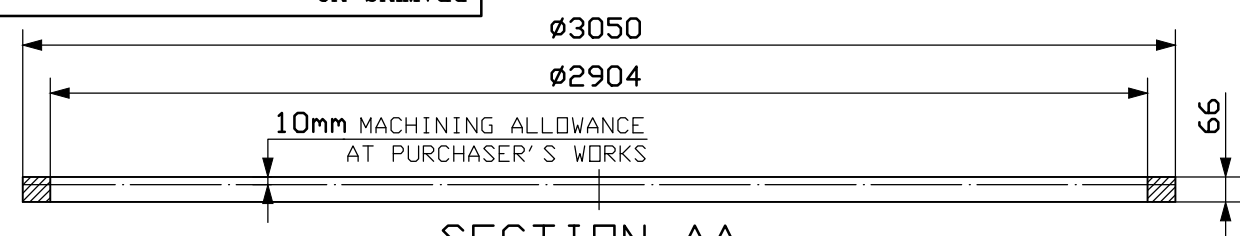

SECTION-AA

(1:20)

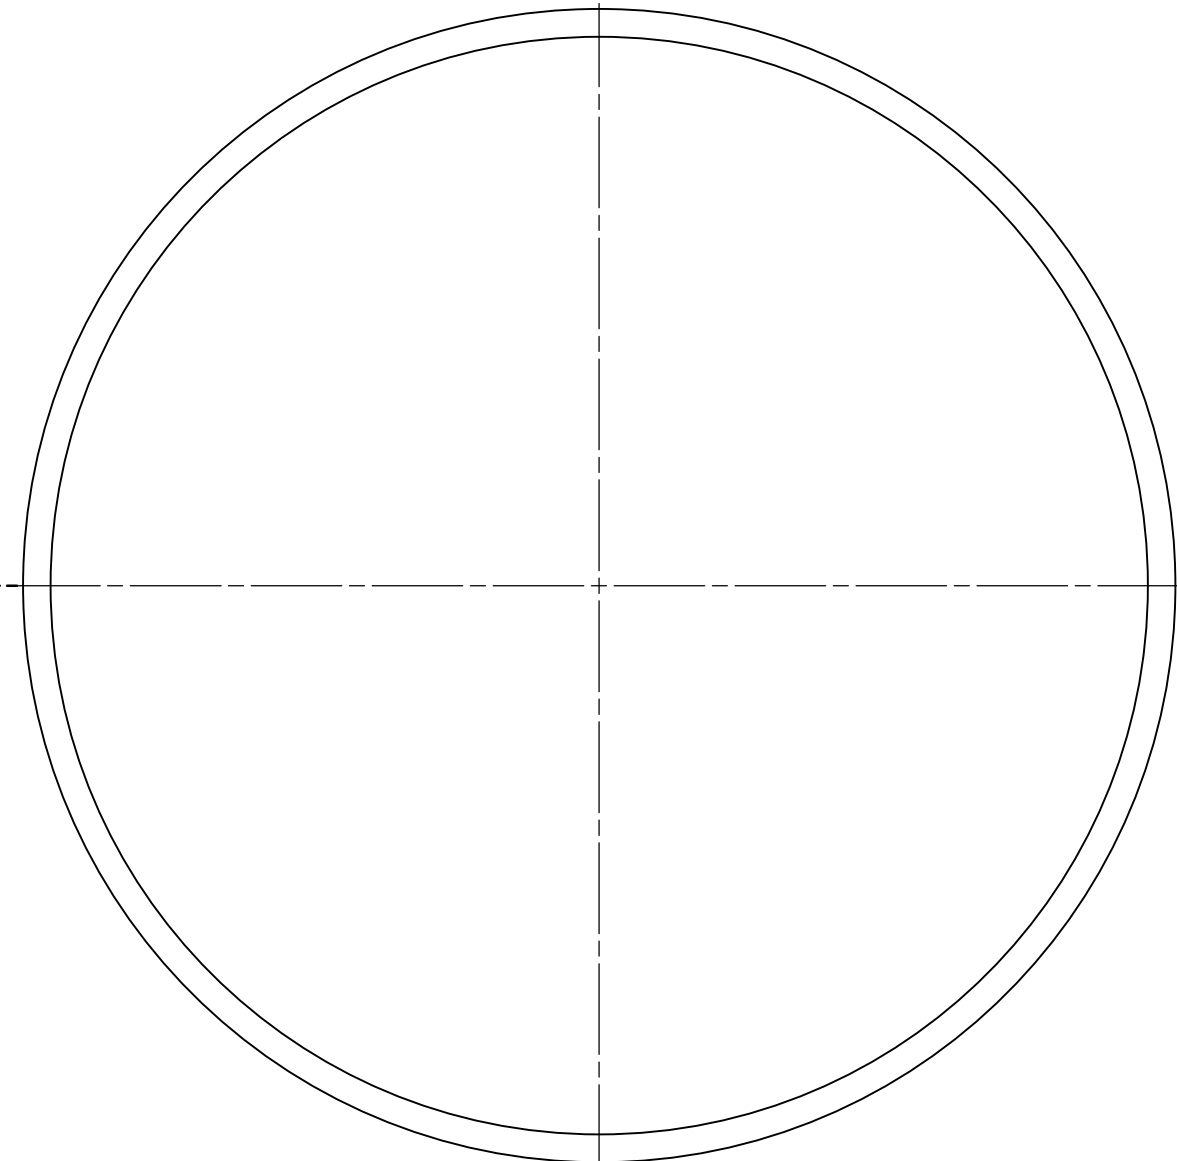

A

ALL DIMENSIONS ARE IN MILLIMETERS

NOTES:-




1. APPLICABLE SPECIFICATION : PC-M-960.
2. MATERIAL SPECIFICATION : DIN EN 10222-2 1.5415 - 16Mo3.
3. SURFACE FINISH : $\sqrt{3.2}$ OR FINER ALL OVER.
4. THE FLANGE SHALL BE SUPPLIED IN FULLY MACHINED CONDITION AS SHOWN.
5. FINISHED FLANGE SHALL BE SUBJECTED TO 100% M.T. AS PER PC-M-960.
6. THE FLANGE SHALL ALSO BE SUBJECTED TO 100% U.T. AS PER PC-M-960.
7. SUITABLE RUST PREVENTIVE COATING WHICH IS EASILY REMOVABLE SHALL BE APPLIED ON ALL MACHINED SURFACES.
8. DETAILED DRAWINGS INDICATING THE VARIOUS STAGES OF MANUFACTURE SHALL BE SUPPLIED TO THE PURCHASER FOR HIS APPROVAL PRIOR TO TAKING UP THE JOB.
9. THE FORGINGS SHALL BE PACKED AND CRATED IN SUCH A MANNER TO BE SUITABLE FOR STORAGE IN TROPICAL CLIMATE.
10. APPROXIMATE WEIGHT : 349 kg

TOLERANCE IF NOT SPECIFIED SHALL BE AS BELOW (REFER IS 2102-m)

LINEAR				ANGULAR	
0.5 TO 3	± 0.1	400 TO 1000	± 0.8	0 TO 10	± 1°
3 TO 6	± 0.1	1000 TO 2000	± 1.2	10 TO 50	± 30'
6 TO 30	± 0.2	2000 TO 4000	± 2.0	50 TO 120	± 20'
30 TO 120	± 0.3	—	—	120 TO 400	± 10'
120 TO 400	± 0.5	—	—	OVER 400	± 5'

REV	DATE	ALTERED :
		CHD&APPD :

CAUTION: The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company.

TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT		700MW _e /GHAVP-1&2						
 05-229/D	Bharat Heavy Electricals Ltd		DRN	NAME N.K.	SIGNATURE 	DATE 120814	NO. OF VAR	
	UNIT: HIGH PRESSURE BOILER PLANT		CHD	NKK/SM		120814		
	TIRUCHIRAPALLI - 620014		APPD	AS		120814		
DEPT NC	GRADE OF UNTOL. DIM C/M/F		SCALE 1:20	WEIGHT (Kg)	REF TO ASSY / OLD DWG		ITEM NO	No OF ITEMS
CODE 150								
TITLE FLANGE-3 (FORGING)				CARD CODE U 01	DRAWING NO : 3-93-170-05307		REV 00	

 BHEL - TRICHY	THIRD PARTY NON-DISCLOSURE AGREEMENT		Doc.No. : ISMS-04/TP/011
			Ver. No: 3.0 Rev. No: 00
	Date : 27 - 10 - 14		

THIRD PARTY NON-DISCLOSURE AGREEMENT

I, _____, on behalf of the _____ (Name of Company), acknowledge that the information received or generated, directly or indirectly, while working with BHEL, Trichy on contract is confidential and that the nature of the business of the BHEL, Trichy is such that the following conditions are reasonable, and therefore:

I warrant and agree as follows:

I, or any other personnel employed or engaged by our company, agree not to disclose, directly or indirectly, any information related to the BHEL, Trichy Without restricting the generality of the foregoing, it is agreed that we will not disclose such information consisting but not necessarily limited to:

- Technical information: Methods, drawings, processes, formulae, compositions, systems, techniques, inventions, computer programs/data/configuration and research projects.
- Business information: Customer lists, project schedules, pricing data, estimates, financial or marketing data,

On conclusion of contract, I, or any other personnel employed or engaged by our company shall return to BHEL, Trichy all documents and property of BHEL, Trichy, including: drawings, blueprints, reports, manuals, computer programs/data/configuration, and all other materials and all copies thereof relating in any way to BHEL, Trichy 's business, or in any way obtained by me during the course of contract. I further agree that I, or any others employed or engaged by our company shall not retain copies, notes or abstracts of the foregoing.

This obligation of confidence shall continue after the conclusion of the contract also.

I acknowledge that the aforesaid restrictions are necessary and fundamental to the business of the BHEL, Trichy and are reasonable given the nature of the business carried on by the BHEL, Trichy I agree that this agreement shall be governed by and construed in accordance with the laws of country.

I enter into this agreement totally voluntarily, with full knowledge of its meaning, and without duress.

Dated at _____, this ____ day of _____, 20__.

Name

Company

Signature

BANK GUARANTEE FOR PERFORMANCE SECURITY

(Non-Judicial Stamp paper/e-stamp paper of appropriate value as per Stamp Act prevailing in the State(s))

Bank Guarantee No:

Date:

To

NAME

& ADDRESSES OF THE BENEFICIARY

IFSC AND MICR CODE

Dear Sirs,

1. In consideration of Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at _____¹ through its Unit at.....(name of the Unit) having awarded to (Name of the Vendor / Contractor / Supplier) (VENDOR CODE) with its registered office at _____² hereinafter referred to as the ' Vendor / Contractor / Supplier ', which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns), a contract Ref No.....dated³ valued at Rs.....⁴ (Rupees -----)/FC.....(in words.....) for⁵ (hereinafter called the 'Contract') and the Vendor / Contractor / Supplier having agreed to provide a Contract Performance Bank Guarantee, equivalent to% (... Percent) of the said value of the Contract to the Employer for the faithful performance of the Contract,

2. we,, (hereinafter referred to as the Bank), having registered/Head office at and inter alia a branch at being the Guarantor under this Guarantee, hereby, irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer any sum or sums upto a maximum amount of Rs -----⁶ (Rupees -----) without any demur, immediately on first demand from the Employer and without any reservation, protest, and recourse and without the Employer needing to prove or demonstrate reasons for its such demand.

3. Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

4. We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Vendor / Contractor / Supplier in any suit or proceeding pending before any Court or Tribunal, Arbitrator or any other authority, our liability under this present being absolute and unequivocal.

5. The payment so made by us under this Guarantee shall be a valid discharge of our liability for payment thereunder and the Vendor / Contractor / Supplier shall have no claim against us for making such payment.

6. We thebank further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract/satisfactory completion of the performance guarantee period as per the terms of the Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied or discharged.

7. We.....BANK further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said Vendor / Contractor / Supplier from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said Vendor / Contractor / Supplier and to forbear or enforce any of the terms and conditions relating to the said Contract and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said Vendor / Contractor / Supplier or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said Vendor / Contractor / Supplier or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

8. The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Vendor / Contractor / Supplier and notwithstanding any security or other guarantee that the Employer may have in relation to the Vendor / Contractor / Supplier's liabilities.

9. This Guarantee shall remain in force upto and including.....⁷ and shall be extended from time to time for such period as may be desired by Employer.

10. This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Vendor / Contractor / Supplier but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof.

11. Unless a demand or claim under this guarantee is made on us in writing on or before the⁸we shall be discharged from all liabilities under this guarantee thereafter.

12. Any claim or dispute arising under the terms of this document shall only be enforced or settled in the Courts at Tiruchirappalli.

13. We..... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

a) The liability of the Bank under this Guarantee shall not exceed.....⁶

- b) This Guarantee shall be valid up to⁷
- c) Unless the Bank is served a written claim or demand on or before (minimum 3 to 6 months from the expiry date)⁸ all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

14. We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

For and on behalf of
(Name of the Bank)

Dated.....

Place of Issue.....

BANK EMAIL ID:

BANK PHONE NO:

AUTHORISED SIGNATORIES CELL PHONE NO:

BANK FAX NO:

¹ NAME AND ADDRESS OF EMPLOYER I.e Bharat Heavy Electricals Limited

² NAME AND ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER.

³ DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

⁴ CONTRACT VALUE

⁵ PROJECT/SUPPLY DETAILS

⁶ BG AMOUNT IN FIGURES AND WORDS

⁷ VALIDITY DATE

⁸ DATE OF EXPIRY OF CLAIM PERIOD

List of Consortium Bank			
	Nationalised Bank		Nationalised Bank
1	Allahabad bank	19	Vijaya Bank
2	Andhra bank		Public Sector Banks
3	Bank of Baroda	20	IDBI
4	Canara Bank		Foreign bank
5	Corporation bank	21	CITI Bank N.A
6	Central bank	22	Deutsche Bank AG
7	Indian Bank	23	The Hongkong and Shanghai Banking Corporation Limited
8	Indian Oversea Bank	24	Standard Chartered Bank
9	Oriental bank of Commerce	25	The Royal Bank of Scotland N.V.
10	Punjab National Bank	26	J P Morgan
11	Punjab & Sindh Bank		Private bank
12	State Bank of India	27	Axis Bank
13	State Bank of Hyderabad	28	The Federal Bank Limited
14	Syndicate Bank	29	HDFC
15	State Bank of Travancore	30	Kotak Mahindra Bank
16	UCO Bank	31	ICICI
17	Union Bank of India	32	Indusind Bank
18	United Bank of India	33	Yes Bank