
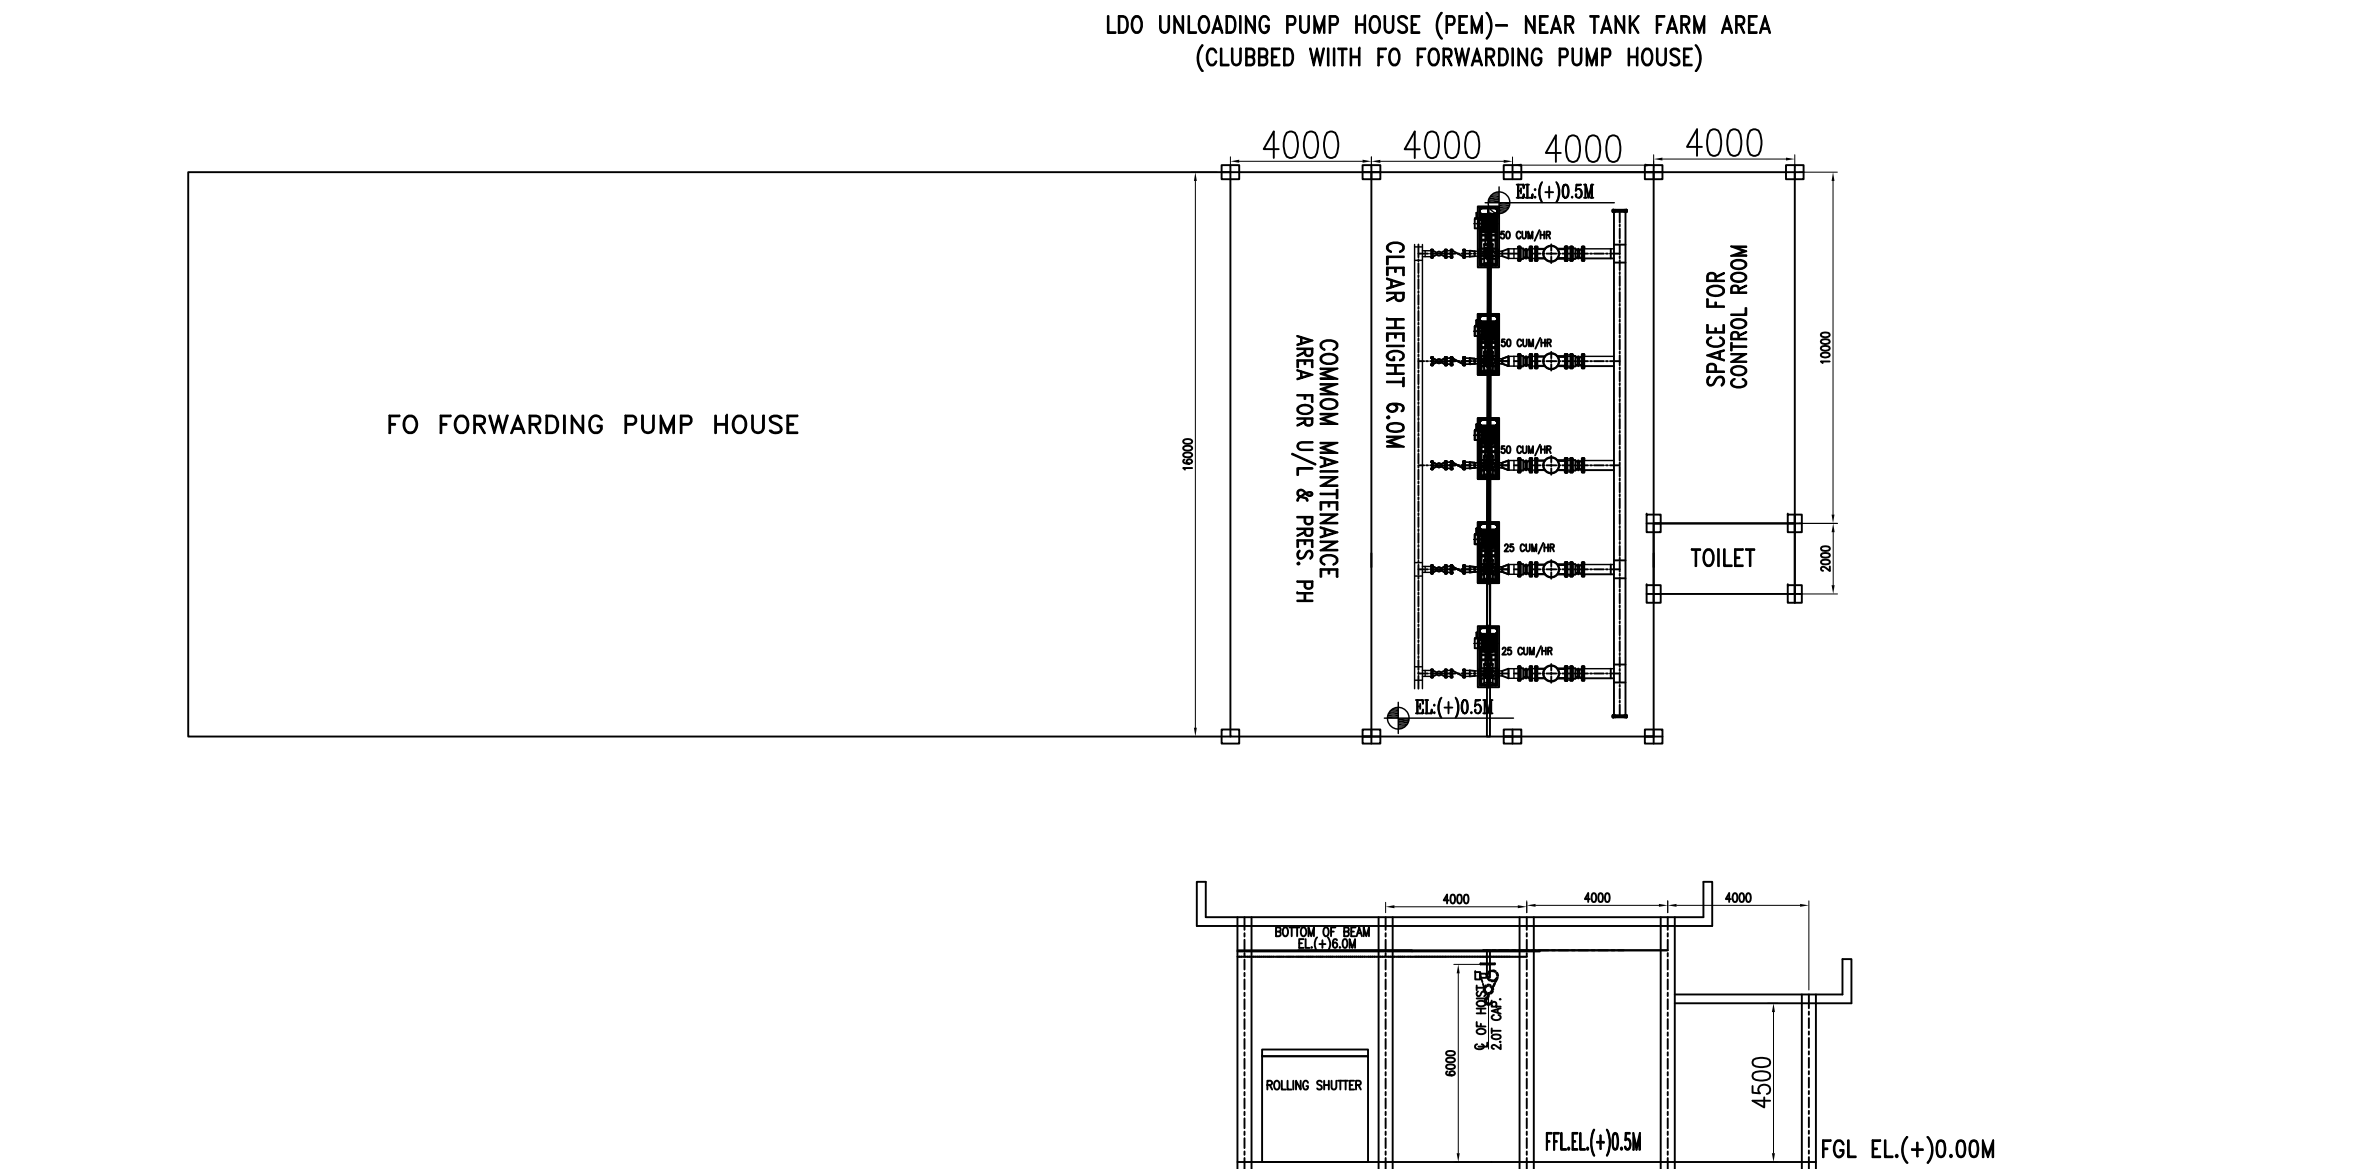
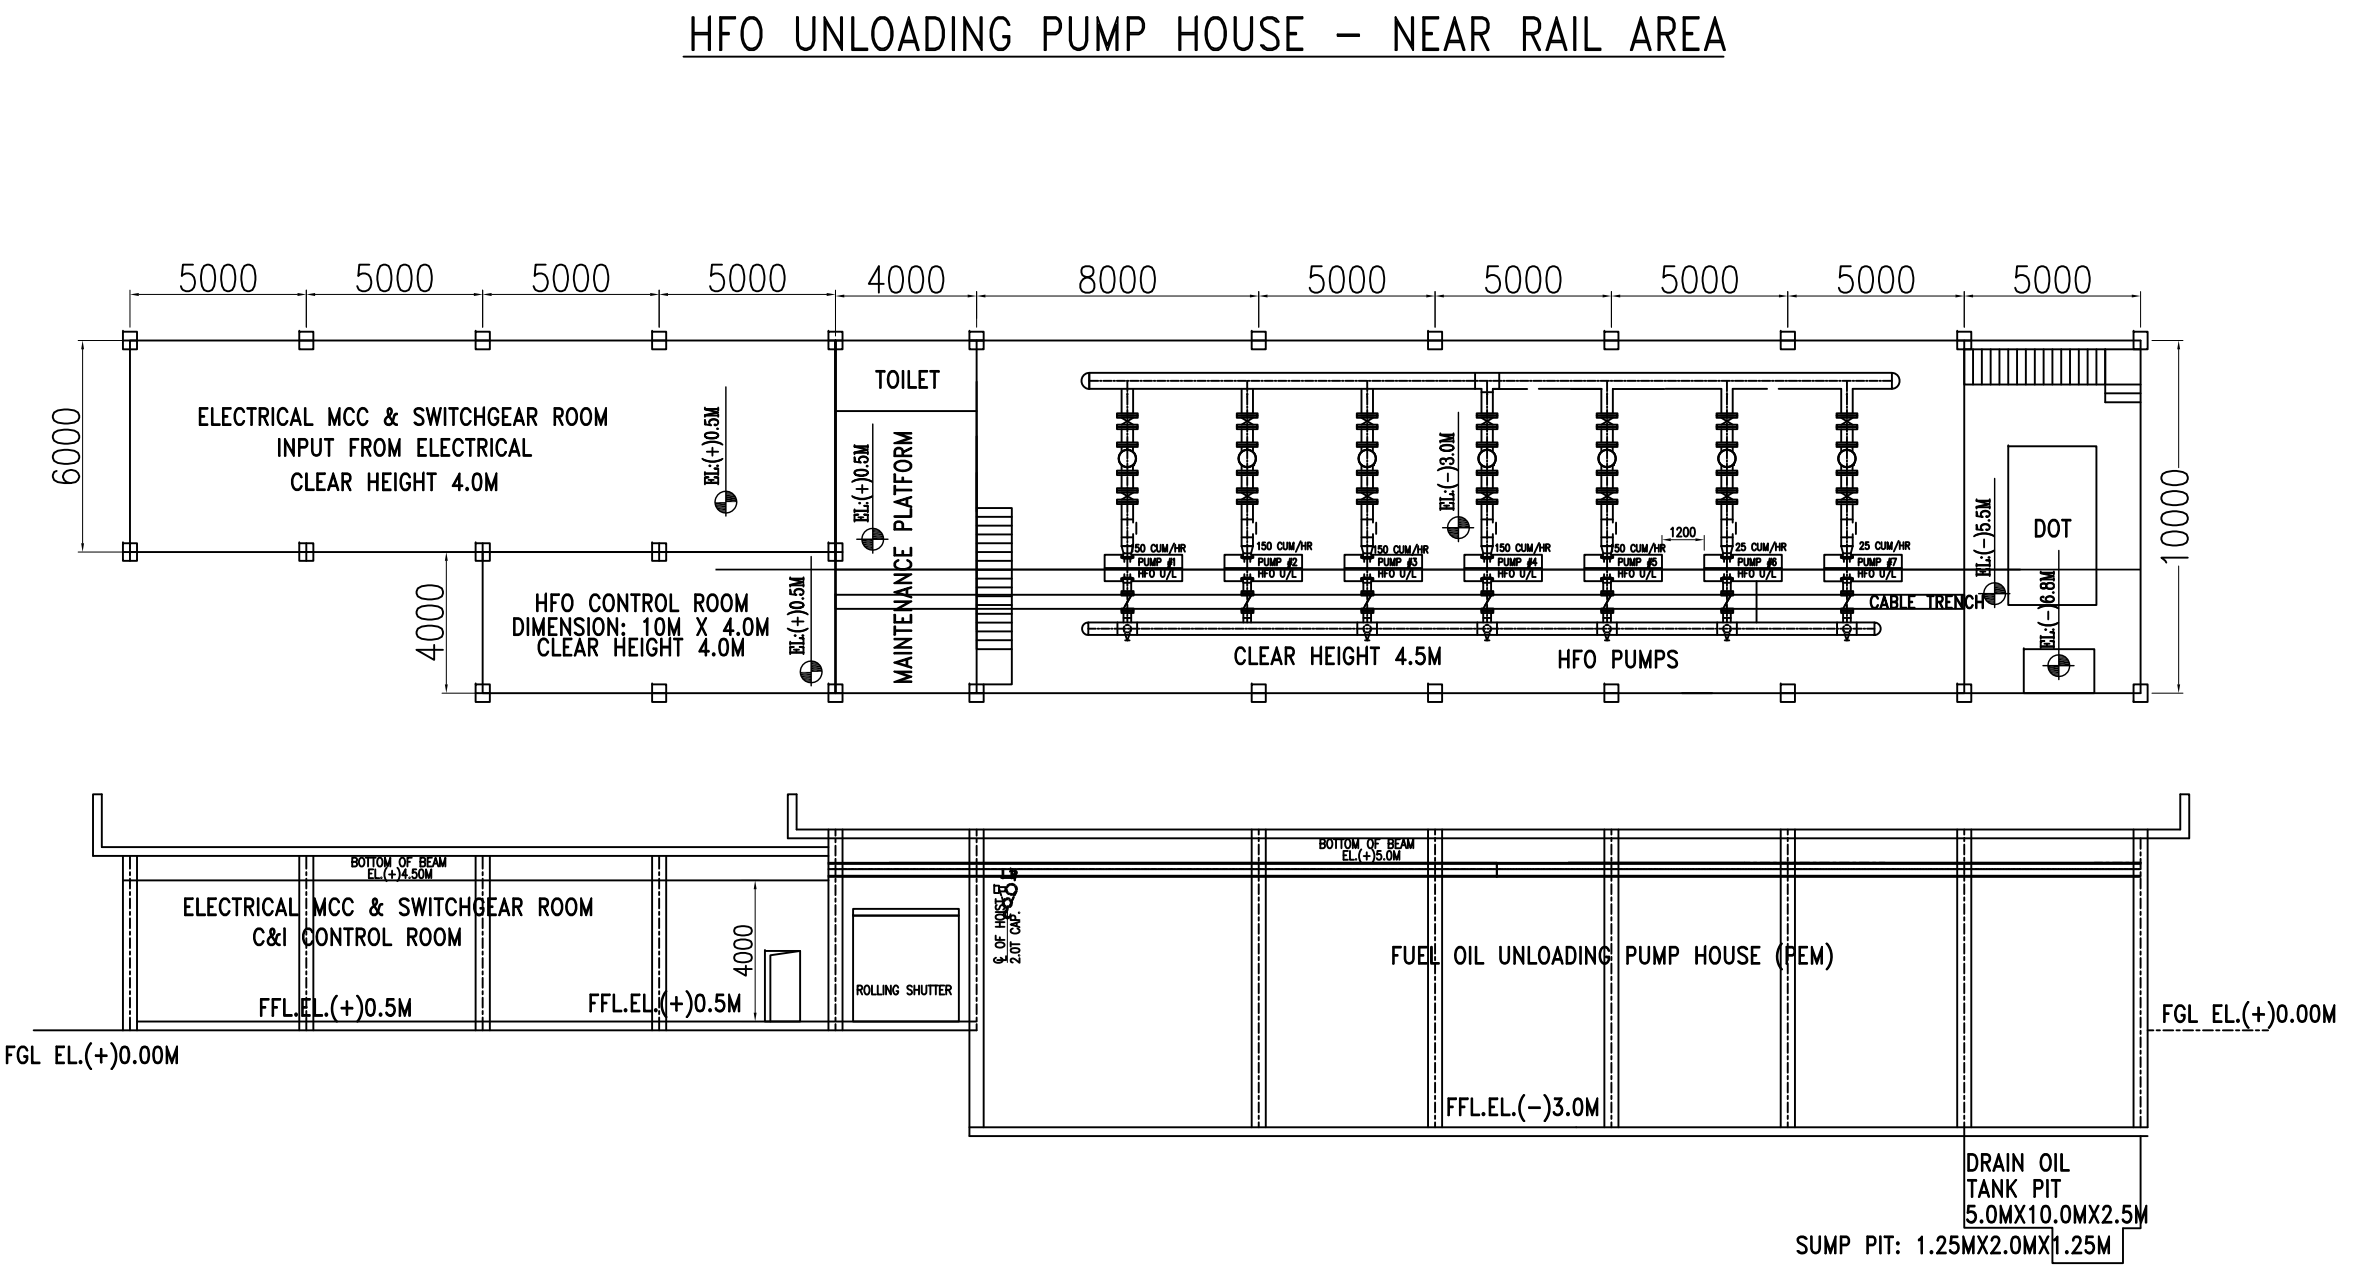


COPY RIGHT AND CONFIDENTIAL
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED
it must not be used directly or indirectly in any way detrimental to the interest of the company.

FILE NAME : 100_M038R0

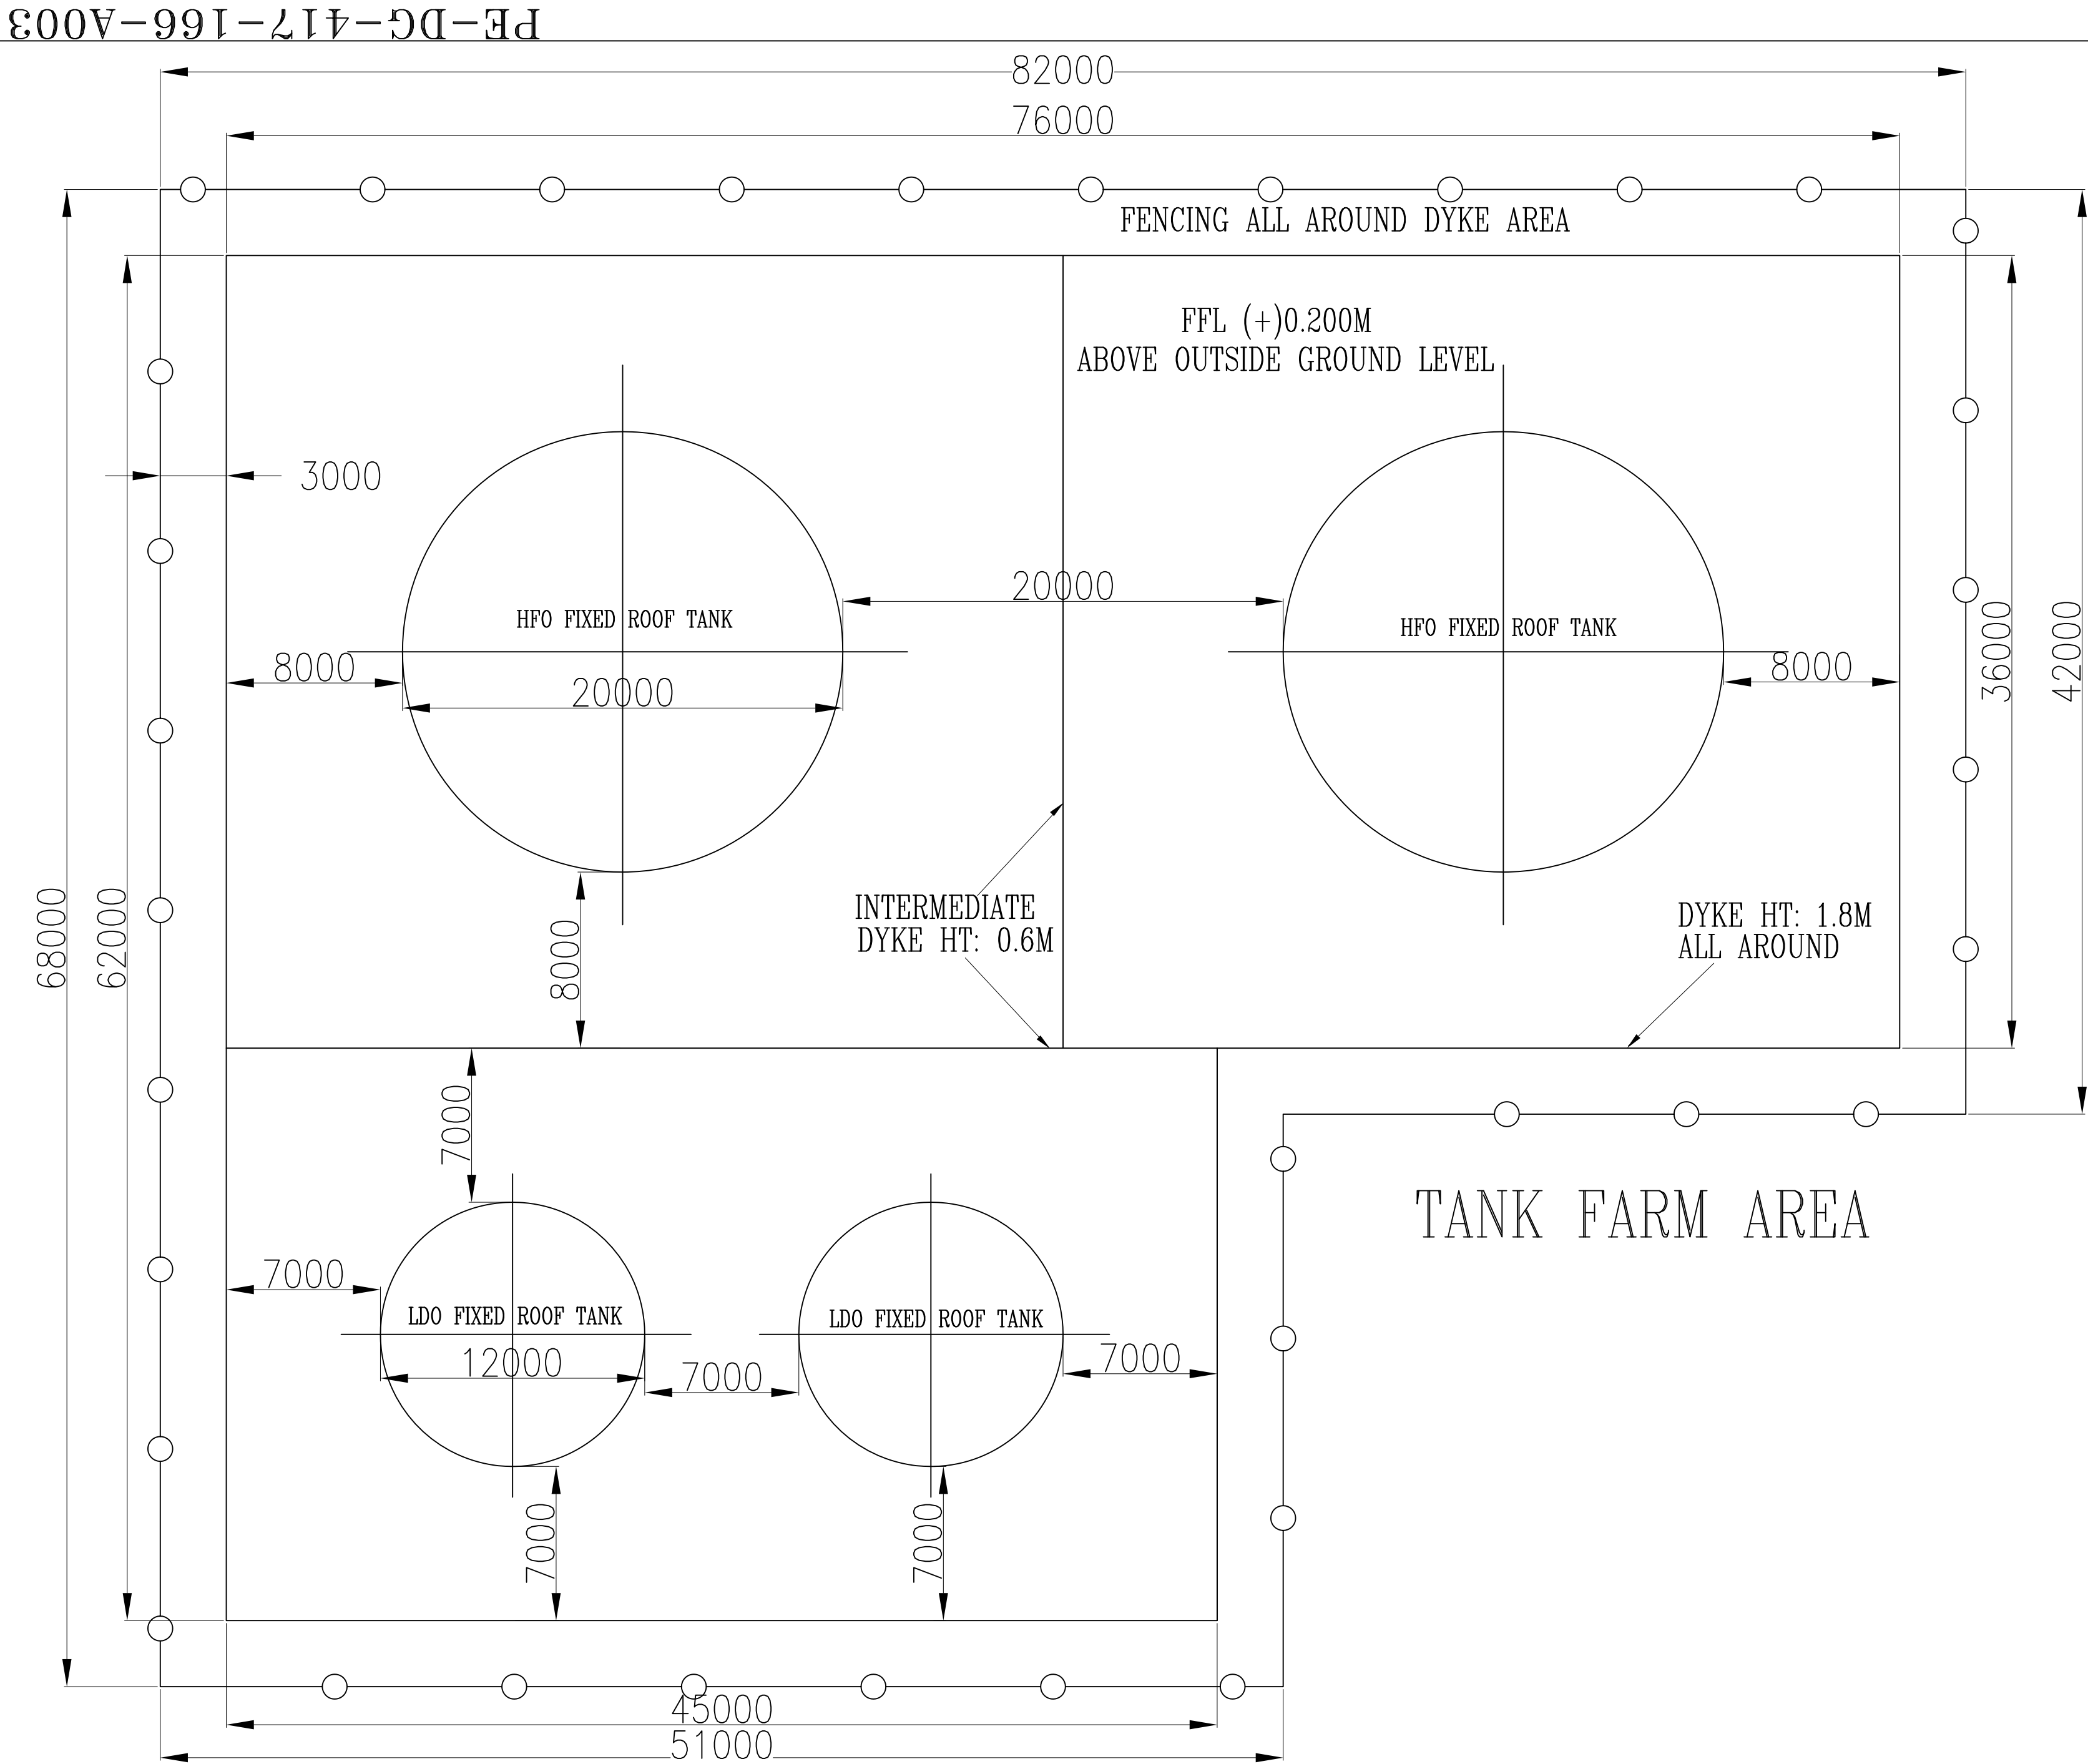

- NOTES:
- 1) MONORAIL BEAM FOR CHAIN PULLEY BLOCK (2.0 T) ALONG THE PUMP HOUSE LENGTH WILL BE PROVIDED BY BHEL-CIVIL.
 - 2) BIDDER TO CONFIRM THE SIZES OF THE UNLOADING PUMP HOUSE AND DYKE AREA INDICATED IN THE DRAWING.

BIDDER SIGN & STAMP

IN CASE, SIZES ARE INADEQUATE, BIDDER TO INDICATE THE SAME IN DRAWING.

CUSTOMER:	TELANGANA STATE POWER GENERATION CORPORATION LTD TELANGANA STATE, INDIA 5X800 MW YADADRI TPS						
	BHARAT HEAVY ELECTRICALS LTD POWER SECTOR PROJECT ENGINEERING MANAGEMENT NOIDA						
COPY RIGHT AND CONFIDENTIAL The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED it must not be used directly or indirectly in any way detrimental to the interest of the company.				DEPT CODE	NAME	SIGN	DATE
				DRN	SKY	~SD~	26.04.2018
				DESN	SKY	~SD~	26.04.2018
				CHD	HK	~SD~	26.04.2018
				APPD	PK	~SD~	26.04.2018
TITLE UNLOADING PUMP HOUSE AND DYKE AREA FOR FOHS							
				DEPT. SIGN	SCALE 	DRAWING NO. PE-DG-417-166-A003	
						SHEET 1 OF 1	REV. 00

5 X 800MW YADADRI TPS

TECHNICAL SPECIFICATION
FOR
FUEL OIL UNLOADING & STORAGE SYSTEM

ANNEXURE - F
(MANDATORY SPARES LIST)



BHARAT HEAVY ELECTRICALS LTD
POWER SECTOR PROJECT ENGINEERING MANAGEMENT
PPEI, NOIDA-INDIA

Mandatory spares- FOHS Yadadri		
SI. NO.	PARTICULARS	QUANTITY
(A)	CONTROL AND INSTRUMENTATION ITEMS	
1	Transmitters/ Gauges/Switches etc. along with relevant accessories	20% of total or at least four (whichever is higher) for each type along with accessories.
2	Temperature Element (RTD/Thermo-couple) with thermowell	20% of each type , range and immersion length . Minimum 10 nos.
3	HFO/LFO Oil meter	
B)	Pneumatic Control Valves	
1	Plot Relay	2 sets for each valve
2	Actuator Diaphragm	2 nos.for each valve
3	Feedback Linkage	2 nos.for each valve
4	Smart Positioners	20% of total quantity of each model/type
5	I/P Converters (If any)	20% of total quantity or minimum 30 nos.
6	Complete Consumables for Valve Viz. O-ring, Gland Packing, Packing Ring, Bonnet Seal etc	4 Sets each size, rating, type
7	Valve Disc	4 Sets each size, rating, type
8	Valve Spindle	4 Sets each size, rating, type
9	Valve Seat	4 Sets each size, rating, type
10	Bush	4 Sets each size, rating, type
11	Guide	4 Sets each size, rating, type
12	Guide Bush	4 Sets each size, rating, type
13	Coupling Nut	4 Sets each size, rating, type
14	Actuator Piston with Rod & Seal	4 Sets each size, rating, type
15	Control valve stem packing and spare operator moulded rubber diaphragms	2 sets for each size, rating, type
16	Valve trim (including cage, plug, stem, seat rings, guide bushings etc.) for each of the control valves as offered.	2 sets for each size, rating, type
17	Solenoid valves, position transmitters, limit switches, I/P converters, positioners etc of each type	20% of total quantity spare with minimum 2 no. for each size, rating, type
C)	Control Panel/ Desk	
1	Back-up panel mounted devices (Selector switches/ Push buttons/ Indicators etc.)	10% of installed capacity
2	Lamps/ LEDs	200% of the total quantity
3	Blank Tiles	20% of installed capacity
4	MCBs	20% of each type & rating
5	Fuses/ Fuse holder	200% of each type & rating

Note:

a)	Unless stated otherwise, a 'set' means item or sub-items required for each type/ size, range of assembly/ sub-assembly required for complete replacement in one equipment system; it is further intended that the assembly/ sub-assembly which have different orientation (like left hand or right hand, top or bottom), different direction of rotation or mirror image positioning or any other reasons which result in marinating two different sets of spares to be used for subject assembly/ sub assembly, these shall be considered as different type of assembly/ sub assembly.
b)	Wherever quantity has been specified as percentage(%), the quantity of mandatory spares to be provided by the vendor shall be the specified percentage (%) of total population required to meet the specification requirements. In case the quantity of mandatory spares so calculated happens to be in fraction, the same shall be rounded off to next higher whole number.
c)	Wherever the quantities have been indicated for each type, size, thickness, material, radius, range etc, these shall cover all the items supplied and installed and the breakup of these shall be furnished by the vendor during detail engineering.

d)	In case spares indicated in the list are not applicable to the particular design offered by the bidder, the bidder should offer spares applicable to the offered design with quantities generally in line with the approach followed in the above list.
e)	Wherever bidder has indicated an item as not applicable, the same will have to be supplied free of cost, in case it is found applicable during detail engineering

5 X 800MW YADADRI TPS

TECHNICAL SPECIFICATION
FOR
FUEL OIL UNLOADING & STORAGE SYSTEM

ANNEXURE - G
(PAINTING SPECIFICATION)



BHARAT HEAVY ELECTRICALS LTD
POWER SECTOR PROJECT ENGINEERING MANAGEMENT
PPEI, NOIDA-INDIA

TECHNICAL SPECIFICATION

FOR

PROTECTIVE LINING AND PAINTING

1.00.00 INTENT OF SPECIFICATION

1.01.00 This specification addresses the requirements of all labour, material, and appliances necessary with reference to preparations for lining / painting, application as well as finishing of all lining / painting for all mechanical and electrical equipment, piping and valves, structures etc. included under the scope of this Package.

1.02.00 The Bidder shall furnish and apply all lining, primers including wash primers if required, under-coats, finish coats and colour bands as described hereinafter or necessary to complete the work in all respects.

2.00.00 CODES & STANDARDS

2.01.00 The Bidder shall follow relevant Indian and International Standards wherever applicable in cleaning of surface, selection of lining material / paints and their application. The entire work shall conform to the following standards / specifications (latest revision or as specified).

- a) SSPC SP 10 / NACE 2 / : Near White Blast Cleaning
- b) SSPC PA 2 : Measurement of dry film Coating Thickness with magnetic gauges.
- c) ASTM D 4541 : Method for pull off strength using portable Adhesion Tester.
- d) NACE RP 0274 – 2004 : High-Voltage Electrical Inspection of Pipeline Coatings
- e) NACE SP 0188 – 2006 : Discontinuity (Holiday) Testing of New Protective Coatings on Conductive Substrates

- f) NACE RP 0169 – 2002 : Control of External Corrosion on Underground or Submerged Metallic Piping Systems
- g) AWWA C 210 – 2007 : Liquid-Epoxy Coating Systems for the Interior and Exterior of Steel Water Pipelines
- h) IS 3589:2001 Annexure B : Steel Pipes for Water and Sewage Specification.
- i) AWWA C222-2000 : Polyurethane Coating for the Interior and Exterior of Steel Water Pipe and Fittings.
- j) IS 13213 : 2000 : Polyurethane Full Gloss Enamel (Two pack)

3.00.00 GENERAL REQUIREMENTS

- 3.01.00** The steel surface preparation prior to actual commencement of coating shall conform to SSPC SP 10 / NACE 2 / Sa2½ (near white metal) with sand blasting.
- 3.02.00** The contractor shall submit a detailed written description in the form of a manual covering coating equipment, procedures, materials inspection test, and repair etc. to Owner/Consultant for approval.
- 3.03.00** The contractor shall also provide copies of test reports from NABL approved laboratory (like National Test House, Kolkata) in support of the paint/primer materials to be used shall conform to the specification requirement.
- 3.04.00** The contractor shall also provide certificates from paint/primer manufacturer mentioning the batch numbers, date of manufacture and shelf life etc. of the materials to be used. In addition to that Manufacturing Quality Plan (MQP) and Field Quality Plan (FQP) shall also be submitted prior to commencement of supply of material and field application.
- 3.05.00** Paint/coating application work at site shall be done either by paint manufacturer or by their authorized applicator. The authorized applicator shall have proper training & certification from manufacturer. Applicator shall possess all the necessary specialized equipment and manpower experienced in similar job.

- 3.06.00 Applied coating shall be tested for dry film thickness, holiday (electrical inspection for continuity) and adhesion as per relevant standard such as SSPC PA 2, NACE RP 0274 and ASTM D 4541.
- 3.07.00 If necessary, the material may be heated and applied by airless spray / plural component spray system.
- 3.08.00 Manufacturer's specific recommendation, if any, shall be followed during application of lining / paints.
- 3.09.00 In areas where there is danger of spotting automobiles or other finally finished equipment or building by wind borne particles from paint spraying, a Purchaser approved method shall be adopted.
- 3.10.00 The colour scheme of the entire Plant, covered under this specification shall be approved by the Purchaser in advance before application.
- 3.11.00 All indoor and outdoor piping, insulated as well as uninsulated will have approved colour bands painted on the pipes at conspicuous places throughout the system, as approved by Purchaser.
- 3.12.00 Inside surfaces of vessels / tanks shall be protected by anticorrosive paints or rubber lining as required / specified elsewhere in the specification. External surfaces of all vessels / tanks shall be protected by anti corrosive painting.
- 3.13.00 For vessels / tanks requiring lining and epoxy painting all inside surface shall be blast cleaned using non-siliceous abrasive after usual wire brushing.
- 3.14.00 Natural rubber lining shall be provided on the inside of vessels / tanks as required / specified elsewhere in the specification, in three layers resulting in a total thickness not less than 4.5 mm.
- 3.15.00 Surface hardness of rubber lining shall be 65 +/- 5 deg. A (shore).
- 3.16.00 After the lining is completed, the vessels / tanks shall not be subjected to any prolonged exposure to direct sunlight in course of its transportation, erection etc. They shall not be stored in direct sunlight. No further lining or burning shall be carried out on the vessel, after application of the lining.

- 3.17.00 All lining projecting outside of the vessel shall be protected adequately from mechanical damages during shipment, handling storage etc.
- 3.18.00 Suitable warnings, indicating the special care that must be taken with respect to these lined vessels shall be stenciled on their outside surface with the letters at least 12 mm high.
- 3.19.00 All insulated piping shall have aluminium sheet jacketing.
- 4.00.00 EQUIPMENT, MATERIAL AND SERVICES TO BE FURNISHED BY THE BIDDER**
- 4.01.00** After erection at site, the outside surfaces of all equipment having a shop coat shall be given further priming coat and finished coats of paint as detailed in following clauses. However, if the painting system is such that the shop coat and primer coat to be applied at site are not compatible, then shop coat has to be removed from the surface of equipment before application of primer coat with prior blasting.
- All factory finished paints shall be touched up at site as required.
- All uninsulated piping shall be finished with final paintings after use of proper wash primer and primer. Aluminium sheet jacketed piping need not be painted. Colour bands of Purchaser's approved shade shall however be applied on jacketed piping near walls or partitions, at all junctions, near valves and all other places as instructed by the Purchaser. All structures shall be painted with approved paint.
- 4.02.00 Surface Preparation**
- 4.02.01 Unless mentioned otherwise, all rust and mill scale shall be removed by blasting to Sa 2-1/2 Swiss Standard before applying the primer.
- 4.02.02 Special care shall be taken to remove grease and oil by means of suitable solvents like Trichloroethylene or Carbon Tetrachloride.
- 4.02.03 The minimum degree of surface preparations for all equipment, piping, fittings, valves, structures etc. shall be "Near White" according to Steel Structure, Painting Council-SSPC-SP-10 before application of any primer/paint.
- 4.03.00 Painting**

- 4.03.01 Specification for application of paints for external surfaces protection of vessels / tanks / equipment / piping / fittings / valves etc. to be installed indoor shall be as follows :
- a) Surface preparation shall be done either manually or by any other approved method.
 - b) Primer Coat shall consist of one coat (minimum DFT of 50 microns) of chlorinated rubber based zinc phosphate.
 - c) Intermediate Coat (or Under Coat) shall consist of one coat (minimum DFT of 50 microns) of chlorinated rubber based paint pigmented with Titanium Dioxide.
 - d) Top Coat shall consist of one coat (minimum DFT of 50 microns) of chlorinated rubber paint of approved shade and colour with glossy finish.
 - e) Total DFT of paint system shall not be less than 150 microns.
- 4.03.02 Specification for application of paints for external surfaces protection of vessels / tanks / equipment / piping / fittings / valves etc to be installed **outdoor** shall be as follows :
- a) Surface preparation shall be done by means of sand blasting, which shall conform to Sa 2-1/2 Swiss Standard.
 - b) Primer Coat shall consist of one coat (minimum DFT of 100 microns) of epoxy resin based zinc phosphate primer.
 - c) Intermediate Coat (or Under Coat) shall consist of one coat (minimum DFT of 100 microns) epoxy resin based paint pigmented with Titanium Dioxide.
 - d) Top Coat shall consist of one coat (minimum DFT of 75 microns) of epoxy paint of approved shade and colour with glossy finish. Additional one coat (minimum DFT of 25 microns) of Finish Coat of polyurethane shall be provided.
 - e) Total DFT of paint system shall not be less than 300 microns.
- 4.03.03 Specification for application of paints for external surfaces protection of steel pipes and fittings which are **buried underground / laid inside a huge pipe & or submerged Under Water and laid under Pipe Trenches** (in road/rail/pipe or trench crossings) shall be as follows :

The no. of coats and DFT specified above is minimum. However to achieve above specified DFT, no of coats can be increased as per paint manufacture's recommendation.

External surface of the pipe, fittings, specialties etc. handling raw water/clarified water/filter water shall be painted with one coat of two part chemically cured polyurethane primer of min 50 micron dry film thickness followed by three or maximum four coats of two part solvent less polyurethane to build up coating of dry film thickness of 2000 micron including primer coat.

- 4.03.04 Specification for application of paints for **internal surface protection of large diameter pipes** (sizes above 600 mm NB and above) if any, shall be as follows :
- a) All Internal surfaces of steel pipes, fittings, specialties etc. buried underground or located within pipe trenches shall be given epoxy coating to protect them from (except for drinking water service, where the compatible painting shall be so selected to meet relevant quality standards) corrosion.
 - b) Internal surface of the pipe should be coated with one coat of two part epoxy primer with not less than 50 micron DFT (dry film thickness) followed by two part polyamide cured solvent less epoxy.
 - c) The minimum dry film thickness (DFT) of internal lining shall be 600 micron.
- 4.03.05 Specification for application of paints for protection of **internal surfaces of DM Water Storage Tank(s)** shall be as follows :
- a) Primer - One coat of epoxy primer containing high level of Zinc Phosphate anticorrosive pigment. Total Dry Film Thickness (DFT) of primer shall not be less than 125 microns.
 - b) Finish Paint - Three (3) coats Polyamine HB Epoxy Paint. Total Dry Film Thickness (DFT) of finish paint shall not be less than 125 microns per coat.
 - c) Total thickness of primer and paint should not be less than 500 microns.
- 4.03.06 All motors, local push button stations, cable racks, structures used for supports etc. are to be painted with acid proof paint.
- 4.03.07 The following surfaces shall not be painted - stainless steel, galvanized steel, aluminum, copper, brass, bronze and other nonferrous materials.
- 4.03.08 No painting or filler shall be applied until all repairs, hydrostatic tests and final shop inspection are completed.

The no. of coats and DFT specified above is minimum. However to achieve above specified DFT, no of coats can be increased as per paint manufacture's recommendation.

4.03.09 All machined surfaces shall have two (2) coats of water repellant grease after thorough cleaning.

5.00.00 COATING PROCEDURE AND APPLICATION

5.01.00 Surface Preparation :

Pipe shall be blast cleaned by sand. The cleanliness achieved prior to application shall be in accordance with the requirement of SSPC SP 10 / NACE 2 / Sa2½ of ISO 8501 (near white metal)

- a) The blast pattern or profile depth shall be 40 to 100 micron and shall be measured by dial micrometer.
- b) Before sand blasting is started or during blasting or coating, temperature of the pipe surface should be more than 3°C above dew point temperature. Blast cleaned surface should be primed within 4 hours and shall be protected from rainfall or surface moisture and shall not be allowed to flash rust. If the rust occurs, the surface again to be prepared by sand blasting or wire brushing.

5.02.00 Application of Epoxy Coating

- a) Coating shall be applied when
 - i) When the pipe surface temperature shall be atleast 3°C above dew point temperature.
 - ii) The temperature of mixed coating material and the pipe at the time of application shall not be lower than 10°C or greater than 50°C.
- b) Material preparation shall be in accordance with manufacturer's recommendations.
- c) Application of epoxy coating system :

The epoxy coating system shall be applied as per recommendation of the manufacturer and shall be applied by airless spray / plural component spray machine. For more than one coat, the second shall be applied with the time limits as recommended by the manufacturer.

5.03.00 Application of PU Coating

- a) PU coating shall be applied when the pipe surface temperature atleast 3°C above dew point temperature (when R.H is more than 85%).
- b) Material preparation and application shall be done as per manufacturer recommendation.

6.00.00 TEST REQUIREMENTS :

6.01.00 Measurement of dry film thickness

Measurement of dry film thickness of coating : Coating thickness shall be in the range of $\pm 20\%$ and as per SSPC PA 2.

6.01.01 Apparatus / Instrument:-

The instrument used for dry film thickness may be Type 1 pull of gauges or Type 2 electronic gauges.

6.01.02 Procedures:-

- a) Number of measurements:
For 100 square feet (9.29 square meters), five (5) spots per test area (each spot is 3.8 cm) in diameter. Three gauge readings per spot (average becomes the spot measurement).
- b) If the structure is less than 300 square feet, each 100 square feet should be measured.
- c) If the structure is between 300 and 1000 sq ft, select 3 random 100 square feet test areas and measure.
- d) For structure exceeding 1000 square feet, select 3 random 100 square feet testing areas for the first 1000 sq ft and select 1 random 100 square feet testing area for each additional 1000 square feet
- e) Coating thickness Tolerance: Individual reading taken to get a representative measurement for the spot are unrestricted (usually low or high readings are discarded). Spot measurements (the average of 3 gauge readings) must be within 80% of the minimum thickness and 120% of the maximum thickness.
Area measurement must be within specified range.

6.02.00 Electrical Inspection (Holiday) Test

- 6.02.01 All the coated / lined pipes shall be tested with an approved high voltage holiday detector preferably equipped with an audio visual signaling device to indicate any faults, holes, breaks or conductive particles in the protective coating.
- 6.02.02 The applied output voltage of holiday detector shall have a spark discharge of thickness equal to at least twice the thickness of the coating to assure adequate inspection voltage and compensate for any variation in coating thickness. The electrode shall be passed over the coated surface at approximately half the spark discharge distance from the coated surface only one time at the rate of approximately 10 to 20m/min. The edge effect shall be ignored. Excessive voltage shall be avoided as it tends to induce holiday in the coated surface thereby giving erroneous readings.
- 6.02.03 While selecting test voltages, consideration should be given to the tolerance on coating thickness and voltage should be selected on the basis of maximum coating thickness likely to be encountered during testing of a particular pipe.
- The testing voltage shall be calculated by using following formula. (as per NACE 0274 : 2004)
- Testing Voltage $V = 7900 \sqrt{T} \pm 10$ percent where T is the average coating thickness in mm.
- 6.02.04 Any audio visual sound or spark leads to indicate pinhole, break or conductive particle.
- 6.03.00 Adhesion Pull off Test :**
- After holiday the coated surface is subjected to adhesion pull off test as per ASTM D 4541.
- 6.03.01 Apparatus / Instrument: Adhesion tester consists of three basic components:
- A hand wheel, a black column containing a dragging indicator pin and scale in the middle and a base containing three legs and a pulling "Jaw" at the bottom and also dollies.
- 6.03.02 Prepare the test surface :
- Once test area is selected, test area shall be free of grease, oil, dirt, water. The area should be flat surfaces and large enough to accommodate the specified number of replicate test.
- 6.03.03 Prepare Dolly (Test Pull Stub) :

The dolly is a round, two sided aluminium fixture. Both sides of the dolly looks same, however, one side sloped on top surface while flat on bottom surface. As the surface of the dolly is polished aluminium, roughen the same using a coarse sand paper.

6.03.04 Select an adhesive:

Use araldite, a 100% solid epoxy adhesive. This adhesive requires at least 24 hours at room temperature to cure.

6.03.05 Attach the dolly to the surface.

- a) Using a wooden stick, apply an even layer of adhesive to the entire contact surface area of the dolly.
- b) Carefully remove the excessive adhesive by using a cotton swab. Allow the adhesive to fully cure before performing the adhesion test.
- c) Attach the dolly to the coated surface and gently push downward to displace any excessive adhesive.
- d) Push the dolly inward against the surface, then apply tape across the head of the dolly.

6.03.06 Adhesion Test Procedure

- a) Attach the adhesion tester to the dolly by rotating the hand wheel counter clockwise to lower the jaw of the device.
- b) Slide the jaw completely under the head of the dolly. Position the three legs of the instruments so that they are sitting flat on the coated surface.
- c) Slide the dragging indicator pin on the black column to zero by pushing it downward.
- d) Firmly hold the base of the instrument in one hand and rotate the handwheel clockwise to raise the jaw of the device that is attached to the head of the dolly. The dragging indicator pin will move upward on the black column as the force is increased and will hold the reading. Apply the tension using a moderate speed. Continue to increase the tension on the head of the dolly until (a) the minimum PSI/MPa/Kg/cm² required by project specification is exceeded and the test is discontinued, (b) the maximum PSI/MPa/Kg/cm² of adhesion tester has been achieved and dolly is still attached, (c) The force applied by the adhesion tester causes the dolly to dislodge.

e) Read the scale and record the adhesion value.

6.04.00 Coating Repair

Defective Coating shall be repaired in accordance with the following subsections.

6.04.01 Surface Preparation:

Accessible areas of pipe requiring coating repairs shall be cleaned to remove debris and damaged coating using surface grinders or other means. The adjacent coating shall be feathered by sanding, grinding or other method. Accumulated debris shall be removed by blowing with contaminant free air or wiping with clean rags.

6.04.02 Areas not accessible for coating repair such as interior surfaces of small diameter pipe shall be reprocessed and recoated.

6.04.03 Coating Application :

The coating system shall be applied to the prepared areas in accordance with procedure.

6.04.04 Repair Inspection :

Repaired portion shall be electrically inspected using a holiday detector.

6.05.00 Welded Field Joints

6.05.01 Preparation :

The weld joints shall be cleaned so as to be free from mud, oil, grease, welding flux, weld spatter and other foreign contaminants. The cleaned metal surfaces of the weld joint shall then be blasted or abraded using rotary abrading pads. The adjacent liquid Epoxy / PU coating shall be feathered by abrading the coating surface for a distance of 25 mm.

6.05.02 Electrical Inspection :

After curing the coating system applied to the welding joints shall be holiday tested. Any holidays indicated by the detector shall be marked with chalk to identify the area of repair.

7.00.00

INFORMATION/DATA REQUIRED

The Bidder shall submit complete list of paints and primers proposed, giving detail information, such as, chemical composition, drying time etc. and also unit rates for application of each type of paint along with supply shall be furnished.

**TELANGANA STATE POWER GENERATION
CORPORATION LTD
TELANGANA STATE, INDIA**

5x800 MW YADADRI TPS, NALGONDA

**FUEL OIL HANDLING AND STORAGE SYSTEM
TECHNICAL SPECIFICATION
(ELECTRICAL PORTION)**

SECTION -IB



**BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT,
NOIDA, U.P., INDIA**



TITLE:
**FUEL OIL HANDLING AND STORAGE SYSTEM
TECHNICAL SPECIFICATION
(ELECTRICAL PORTION)**
5X800 MW YADADRI TPS

SPECIFICATION NO.
VOLUME NO. : **II-B**
SECTION: **C**
REV NO. : **00** DATE: 04/04/2018
SHEET: 1 OF 1

CONTENTS

TITLE	NO OF SHEETS
COVER SHEET	1
CONTENT	1
BASIC TECHNICAL FEATURES OF LV MOTORS	7
ELECTRICAL SCOPE BETWEEN BHEL & VENDOR	3
ELECTRICAL LOAD DATA FORMAT	1
DATASHEET-A	1
DATASHEET-C	2
CABLE SCHEDULE FORMAT	1
EXPLANATORY NOTES FOR CABLE LISTING	2
QUALITY PLAN (FOR MOTORS ABOVE & 55 KW)	9
QUALITY PLAN (FOR MOTORS BELOW 55 KW)	2
TOTAL	30

BASIC TECHNICAL FEATURES FOR LT MOTORS

(FOR BHEL-PEM SCOPE PACKAGES)

												CUSTOMER: TELANGANA STATE POWER GENERATION CORPORATION LTD TELANGANA, INDIA 5 x 800 MW YADADRI TPS, NALGONDA																																
										OWNER'S CONSULTANT:																																		
										JOB NO. 417										BHARAT HEAVY ELECTRICALS LTD POWER SECTOR PROJECT ENGINEERING MANAGEMENT NOIDA																								
										STATUS CONTRACT																																		
DISTRIBUTION										COPY RIGHT AND CONFIDENTIAL The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED it must not be used directly or indirectly in any way detrimental to the interest of the company. <table border="1" style="font-size: 8px;"> <tr> <th>DEPT</th> <th>CODE</th> <th>NAME</th> <th>SIGN</th> <th>DATE</th> </tr> <tr> <td>DRN</td> <td></td> <td>HC</td> <td>s.d.</td> <td>07.12.17</td> </tr> <tr> <td>DESN</td> <td></td> <td>HC</td> <td>s.d.</td> <td>07.12.17</td> </tr> <tr> <td>CHD</td> <td></td> <td>AS</td> <td>s.d.</td> <td>07.12.17</td> </tr> <tr> <td>APPD</td> <td></td> <td>PD</td> <td>s.d.</td> <td>07.12.17</td> </tr> </table>										DEPT	CODE	NAME	SIGN	DATE	DRN		HC	s.d.	07.12.17	DESN		HC	s.d.	07.12.17	CHD		AS	s.d.	07.12.17	APPD		PD	s.d.	07.12.17
DEPT	CODE	NAME	SIGN	DATE																																								
DRN		HC	s.d.	07.12.17																																								
DESN		HC	s.d.	07.12.17																																								
CHD		AS	s.d.	07.12.17																																								
APPD		PD	s.d.	07.12.17																																								
REV.	DATE	ALTD	CHD	APPD	REV.	DATE	ALTD	CHD	APPD	TITLE BASIC TECHNICAL FEATURES FOR LT MOTORS																																		
										<table border="1" style="font-size: 8px;"> <tr> <td>DEPT.</td> <td>SCALE</td> <td rowspan="2" style="text-align: center;">  </td> <td colspan="2">DRAWING NO.</td> </tr> <tr> <td>SIGN</td> <td></td> <td colspan="2">PE-DC-417-565-E003</td> </tr> </table>					DEPT.	SCALE		DRAWING NO.		SIGN		PE-DC-417-565-E003																						
DEPT.	SCALE		DRAWING NO.																																									
SIGN			PE-DC-417-565-E003																																									
										<table border="1" style="font-size: 8px;"> <tr> <td>SHEET</td> <td>1</td> <td>OF</td> <td>7</td> <td>REV.</td> <td>00</td> </tr> </table>					SHEET	1	OF	7	REV.	00																								
SHEET	1	OF	7	REV.	00																																							